TECHNICAL REFERENCE LIBRARY

Master Electrical Distribution Hardware Catalogue

Panelboards · Switchboards · Circuit Breakers · Mounting & Connection Hardware

Identification · Compatibility · Supersession · OEM Documentation

Edition 0.1

Generated 2026-10-21 from database build 147a119

4395 hardware entries · 100 equipment families · 193 breaker families · 675 sources

Manufacturer lineages covered

EAT — Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant
SQD — Square D, Schneider Electric, Federal Pioneer (Canada)
GEA — General Electric Industrial Solutions; ABB from 2018; ReliaGear
SIE — Siemens, ITE, ITE Imperial, Gould, Murray
FPE — Federal Pacific Electric (Stab-Lok, NA/NE/NF/NH panelboards)
ZIN — Zinsco, GTE-Sylvania
OTH — Other / unassigned

Independent research reference. Not affiliated with or endorsed by any manufacturer named. Trademarks belong to their owners.
Compatibility statements carry evidence classes A–D; only class A is manufacturer-documented. Verify before installation.

Document Control

Item	Value
Edition	0.1
Generated	2026-10-21
Database build (git)	147a119
Hardware entries	4395
Equipment families	100
Breaker families	193
Sources registered	675
Documents preserved in library	491
Open research leads	170

Revision history (research batches merged)

Batch	Research date	Merged	New parts	Updated	New sources
B0001-eaton-prl-panelboards	2026-10-21	2026-10-21	422	0	12
B0002-eaton-switchboards-legacy	2026-10-21	2026-10-21	38	89	14
B0003-squared-panelboards	2026-10-21	2026-10-21	220	0	67
B0004-squared-switchboards	2026-10-21	2026-10-21	158	19	49
B0005-ge-abb	2026-10-21	2026-10-21	280	0	22
B0006-siemens-ite	2026-10-21	2026-10-21	244	0	15
B0007-breaker-terminal-kits-eaton-squared	2026-10-21	2026-10-21	379	10	18
B0008-breaker-terminal-kits-ge-siemens	2026-10-21	2026-10-21	184	0	8
B0009-legacy-other-manufacturers	2026-10-21	2026-10-21	152	1	39
B0010-docs-eaton-siemens	2026-10-21	2026-10-21	208	252	152
B0011-docs-ge-squared	2026-10-21	2026-10-21	179	133	38
B0012-archival-legacy-panelboards	2026-10-21	2026-10-21	135	21	30
B0013-eaton-mirror-deep-dive	2026-10-21	2026-10-21	335	225	1
B0014-siemens-instruction-sheets	2026-10-21	2026-10-21	309	120	124
B0015-squared-legacy-and-unmined	2026-10-21	2026-10-21	340	8	25
B0016-aftermarket-retrofit	2026-10-21	2026-10-21	157	147	23
B0018-breaker-installation-accessories	2026-10-21	2026-10-21	291	32	10
B0017-ge-abb-deep-dive	2026-10-21	2026-10-21	364	71	28

This catalogue is generated automatically from the structured parts database (*data/ → build/edh_catalogue.sqlite*). Corrections must be made in the database, never in this PDF. Catalogue identifiers (EDH-…, FAM-…, BRK-…, SRC-…) are permanent and are never reused.

Table of Contents

Document Control 2

1 How to Use This Catalogue 9

2 Hardware Identification Guide 10

2.1 Anatomy of a panelboard interior . . . 10

2.2 Breaker mounting styles . . . 10

2.3 Branch connector straps — what to measure . . . 11

2.4 Terminal lug types . . . 11

3 Eaton lineage 20

3.1 BR — Type BR loadcenter . . . 22

3.2 CH-BR-RETRO — Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box) . . . 32

3.3 CDP — Westinghouse CDP / HCDP distribution panelboard . . . 70

3.4 CHA-PM4 — Challenger distribution panelboards (PM4a / PM4b) . . . 106

3.5 CHP/CHB — Cutler-Hammer CHP / CHB lighting panelboards . . . 113

3.6 EE — Cutler-Hammer Type EE plug-in power panelboard / switchboard . . . 113

3.7 EP — Cutler-Hammer Type EP plug-in power panelboard . . . 121

3.8 FDP — Westinghouse FDP fusible distribution panelboard . . . 122

3.9 MP100 — Cutler-Hammer MP100 fusible distribution panelboard . . . 131

3.10 MP40 — Cutler-Hammer MP40 distribution panelboard . . . 138

3.11 NAB — Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards . . . 147

3.12 NFB — Cutler-Hammer NFB panelboard . . . 147

3.13 NLAB — Westinghouse NLAB lighting panelboard . . . 147

3.14 NM/NMM — Westinghouse NM / NMM / NMIB Multibreaker panelboards . . . 148

3.15 PB — Cutler-Hammer Type PB lighting panelboard . . . 148

3.16 PH — Cutler-Hammer Type PH / PH-L panelboard . . . 156

3.17 PRC — Pow-R-Command lighting control panelboard . . . 165

3.18 PRL-LX — Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX) . . . 165

3.19 PRL-RETRO — Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB) . . . 170

3.20 PRL1/PRL2 — Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage) . . . 171

3.21 PRL1A — Pow-R-Line 1a . . . 178

3.22 PRL1X — Pow-R-Line Xpert 1X . . . 301

3.23 PRL2A — Pow-R-Line 2a . . . 318

3.24 PRL2X — Pow-R-Line Xpert 2X . . . 319

3.25 PRL3 — Westinghouse Pow-R-Line 3 (vintage) . . . 320

3.26 PRL3A — Pow-R-Line 3a . . . 322

3.27 PRL3E — Pow-R-Line 3E . . . 390

3.28 PRL3FQS — Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard) . . . 390

3.29 PRL3X — Pow-R-Line Xpert 3X . . . 418

3.30 PRL4 — Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout) . . . 420

3.31 PRL4X — Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F) . . . 505
3.32 PRL5P — Pow-R-Line 5P plug-on distribution panelboard . . . 506
3.33 WEB — Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards . . . 520
3.34 ES — Cutler-Hammer Type ES switchboard . . . 520
3.35 IFS — Integrated Facility System switchboard . . . 520
3.36 MP2 — Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section) . . . 521
3.37 PRLC — Pow-R-Line C switchboard . . . 521
3.38 PRLCS — Pow-R-Line CS switchboard . . . 522
3.39 PRLXD — Pow-R-Line XD switchboard . . . 523
3.40 PRLi — Pow-R-Line i switchboard . . . 523
3.41 WF/WRP — Westinghouse WF/WRP switchboard . . . 523
3.42 Breaker-mounted terminal kits and accessories . . . 524
Breaker family Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) . . . 524
Breaker family Series C F-frame (EHD/FDB/FD/HFD/FDC) . . . 555
Breaker family Series C G-Frame (GD/GHC/GHB) . . . 556
Breaker family Series C J-Frame (JD/HJD/JDC/JDB) . . . 559
Breaker family Series C J-frame (JD/JDB/HJD/JDC) . . . 573
Breaker family Series C K-Frame (KD/HKD/KDC/KDB) . . . 574
Breaker family Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) . . . 608
Breaker family Series C L-Frame (LD/HLD/LDC/LDB) . . . 609
Breaker family Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) . . . 628
Breaker family Series C M-Frame (MDL/HMDL/MDLB) . . . 628
Breaker family Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) . . . 642
Breaker family Series C N-Frame (ND/HND/NDC/NB) . . . 643
Breaker family Series C R-Frame (RD/RDC) . . . 655
Breaker family Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) . . . 660
Breaker family Series G JG-Frame (JGE/JGS/JGH/JGC) . . . 672
Breaker family Series G LG-Frame (LGE/LGS/LGH/LGC) . . . 683
Breaker family Series G NG-Frame . . . 700

4 Square D / Schneider Electric 702

4.1 SQD-NQNF-RETRO — Square D NQ / NF retrofit (custom trim + current interior into existing enclosure) . . . 703
4.2 I-LINE — I-Line circuit breaker panelboard (Class 2110) . . . 703
4.3 MLN — Square D MLN panelboards and switchboards (ML breakers) . . . 781
4.4 NA1B — Square D NA1B panelboard (E-frame bolted, AC/DC) . . . 787
4.5 NEHB — NEHB panelboard . . . 787
4.6 NF — NF panelboard (Class 1670) . . . 789
4.7 NH1B — Square D NH1B 480 V AC lighting panelboard (FY / FA breakers) . . . 819
4.8 NQ — NQ panelboard (Class 1640) . . . 819
4.9 NQO — NQO / NQOB panelboard . . . 890
4.10 NQOB — Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on) . . . 898
4.11 NQOD — NQOD panelboard (Class 1630) . . . 904

4.12 QMB — QMB fusible panelboard (Class 4620) . . . 923
4.13 QMB-LEGACY — Legacy QMB distribution (pre-October-1984 QM and QW interiors) . . . 978
4.14 QED-2 — Power-Style QED-2 Switchboard . . . 994
4.15 SPEED-D — Speed-D Merchandised Service Section Switchboard . . . 1000
4.16 Breaker-mounted terminal kits and accessories . . . 1000
Breaker family QO (plug-on) . . . 1000
Breaker family Square D FA/FH/FC/FI (F-frame 100/150 A) . . . 1003
Breaker family Square D KA/KH/KC/KI (K-frame 250 A) . . . 1008
Breaker family Square D LA/LH (L-frame 400 A) . . . 1010
Breaker family Square D LC/LI/LE/LX/LXI (L-frame 600 A) . . . 1014
Breaker family Square D MA/MH/MX/ME (M-frame 1000 A) . . . 1019
Breaker family Square D NA/NC/NX/NE (N-frame 1200 A) . . . 1019
Breaker family Square D PowerPact D-Frame (DG/DJ/DL) . . . 1020
Breaker family Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) . . . 1022
Breaker family Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) . . . 1028
Breaker family Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) . . . 1033
Breaker family Square D PowerPact M-Frame (MG/MJ) . . . 1047
Breaker family Square D PowerPact P-Frame (PG/PJ/PL) . . . 1049
Breaker family Square D PowerPact R-Frame (RG/RJ/RL) . . . 1050
4.17 General / family not yet assigned . . . 1051

5 GE / ABB lineage 1053

5.1 A-SERIES — A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU) 1054
5.2 A-SERIES-COL — A-Series Column Panelboards (ALC, AQC, AEC) . . . 1095
5.3 A-SERIES-PWR — A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N') . . . 1096
5.4 CCB-QMR — Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts) . . . 1110
5.5 CONVERTI-FUSE — Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards . . . 1149
5.6 NHB — NAB / NHB bolt-on panelboards (legacy) . . . 1150
5.7 NLAB — GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers) . . . 1151
5.8 RG-LIGHTING — ReliaGear lighting panelboards (Types RQ, RE, RL, RS, RD; AD interiors) . . . 1158
5.9 RG-NEXT — ReliaGear neXT Power Panelboards . . . 1161
5.10 SCP-PLUS — Spectra Series Type SCP Plus panelboards . . . 1163
5.11 SPECTRA-PP — Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB) . . . 1184
5.12 TRUMBULL — Trumbull Electric (Plainville CT) panelboards and switches . . . 1371
5.13 AV-LINE — AV-Line switchboards (legacy) . . . 1372
5.14 RG-SB — ReliaGear SB low voltage switchboards . . . 1373
5.15 SPECTRA-SB — Spectra Series Switchboards (group-mounted Class 1; plug-in Spectra distribution panels) . . . 1374
5.16 Breaker-mounted terminal kits and accessories . . . 1374
Breaker family E150 line (TEB, TED, THED, TEC) . . . 1374
Breaker family F225 line (TFJ, TFK, THFK, TFC) . . . 1381
Breaker family GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) . . . 1387
Breaker family GE TQ / TQL / TQC / TQB / TBQ lighting breakers . . . 1388

Breaker family J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) . . . 1394
Breaker family K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) . . . 1404
Breaker family Record Plus FB 100 . . . 1424
Breaker family Record Plus FC (FCS/FCV/FCN/FCH/FCL) . . . 1426
Breaker family Record Plus FE 250 . . . 1431
Breaker family Record Plus FG (FGV/FGN/FGH/FGL/FGP) . . . 1433
Breaker family Record Plus FG 600 . . . 1434
Breaker family Spectra RMS SE150 . . . 1436
Breaker family Spectra RMS SF250 . . . 1439
Breaker family Spectra RMS SG600 . . . 1441
Breaker family Spectra RMS SK1200 . . . 1446
Breaker family Spectra SE (SEDA/SEHA/SELA/SEPA) . . . 1449
Breaker family Spectra SF (SFHA/SFLA/SFPA) . . . 1453
Breaker family Spectra SG (SGDA/SGHA/SGLA/SGPA) . . . 1455
Breaker family Spectra SK (SKHA/SKLA/SKPA) . . . 1457
Breaker family TEY / TEYF / TEYD / TEYH / TEYL . . . 1463
Breaker family THQB / THHQB / TXQB . . . 1464
Breaker family TQD / THQD . . . 1464
Breaker family TQD / THQD (Q-Line 225A) . . . 1465
5.17 General / family not yet assigned . . . 1466
6 Siemens lineage 1468
6.1 MURRAY — Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens) . . . 1469
6.2 CDP-ITE — ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants) . . . 1469
6.3 NLAB — ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards . . . 1471
6.4 P1 — Type P1 (original) . . . 1472
6.5 P2 — Type P2 panelboard . . . 1482
6.6 P3 — Type P3 panelboard . . . 1507
6.7 P4 — Type P4 / S4 / Sentron SPP (10in deep) power panelboard . . . 1516
6.8 P5 — Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard . . . 1561
6.9 PUSHMATIC — Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions) . . . 1603
6.10 RP1 — Type P1 (Revised P1) . . . 1610
6.11 S1/S2 — Type S1 / S2 lighting panelboards . . . 1705
6.12 SE — Type SE panelboard . . . 1708
6.13 CDP6 — Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage) . . . 1708
6.14 SB — Type SB1 / SB2 / SB3 distribution switchboards . . . 1720
6.15 SBP — Super Blue Pennant / Blue Pennant stock service entrance switchboards . . . 1738
6.16 Breaker-mounted terminal kits and accessories . . . 1749
Breaker family BQ / BQH / HBQ / BQXD bolt-on . . . 1749
Breaker family BQD / CQD (incl. BQD6, CQD6) . . . 1750
Breaker family GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' . . . 1752
Breaker family NGG / HGG / LGG (G-frame bolt-on/lug) . . . 1752
Breaker family QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) . . . 1755

Breaker family QR2 / QRH2 / HQR2 (250A frame) . . . 1756
Breaker family Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) . . . 1758
Breaker family Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) . . . 1767
Breaker family Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) . . . 1772
Breaker family Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) . . . 1781
Breaker family Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) . . . 1784
Breaker family Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) . . . 1786
Breaker family Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) . . . 1801
Breaker family Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) . . . 1803
Breaker family Sentron RD (RD6, RXD6, HRD6, HRXD6) . . . 1806
Breaker family Sentron VL (DG, FG, JG, LG, MG, NG) . . . 1807

6.17 General / family not yet assigned . . . 1836

7 Federal Pacific Electric 1847

7.1 BDP — FPE BDP distribution panelboard (double-hole bus) . . . 1847
7.2 CDP — FPE CDP distribution panelboard (single-hole bus) . . . 1852
7.3 FDP — FPE FDP fusible distribution panelboard / QMQB switchboard . . . 1858
7.4 NA1B — FPE NA1B / NH1B lighting and appliance panelboards . . . 1865
7.5 NBLP — FPE NBLP / NQLP bolt-on lighting panelboards . . . 1867
7.6 NDP — FPE NDP panelboard . . . 1867
7.7 FPE-SWBD — FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic) . . . 1868

8 Zinsco / Sylvania 1871

8.1 ZIN-DIST — Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus) 1871
8.2 ZIN-Q — Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip) . . . 1876

9 Other manufacturers 1890

9.1 COMMANDER — Commander / CEB panels (Zinsco-type) . . . 1890
9.2 FA — Frank Adam Electric panelboards . . . 1890
9.3 IEM-CDP — Industrial Electric Mfg (IEM) CDP-type distribution panelboards / switchboard distribution sections . . . 1891
9.4 KINNEY — Kinney panelboards . . . 1893
9.5 WADSWORTH — Wadsworth panelboards and breakers . . . 1893
9.6 Breaker-mounted terminal kits and accessories . . . 1893
Breaker family Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) . . . 1894

10 Breaker Family Register 1906

11 Cross-Reference Tables 1936

11.1 Supersession and alternate numbers . . . 1936
11.2 Replacement and successor statements . . . 1966
11.3 Aftermarket and reproduction availability . . . 1973
11.4 Companion parts required for installation . . . 1979

12 Indexes 1983

12.1 Manufacturer index . . . 1983
12.2 Equipment family index (including aliases) . . . 1983

12.3 Part-number index (primary and alternate numbers) 2000
12.4 Breaker compatibility index 2148
12.5 Component-type index 2260
12.6 Rating and pole index 2273
12.7 Physical dimension and hole-pattern index 2310
Appendix A Documentation Library **2352**
Appendix B Bibliography and Source Register **2373**
Appendix C Research Status and Open Questions **2408**

1 How to Use This Catalogue

The catalogue is organised by **manufacturer lineage**, then **equipment family** (panelboard, switchboard or loadcenter series), then **component type**. Every hardware item has a permanent catalogue identifier of the form **EDH-<MFR>-nnnnn**.

To identify an unknown part: (1) establish the manufacturer and equipment family from the enclosure nameplate, interior label or breaker type; (2) use Section 2 to decide the component type from its function and mounting style; (3) look up any stamped number in the Part-Number Index (partial numbers are listed in normalised alphanumeric order); (4) if no number is legible, use the Breaker Compatibility Index and the identification-feature table to narrow candidates, then compare dimensions and hole patterns against the part entry.

Claims, not records, carry confidence. Each line in a part entry shows the evidence class of that specific statement and the sources supporting it (S-numbers link to the Source Register in Appendix B). A part may have an OEM-verified part number (A) and only a tentative breaker compatibility (C).

Class	Meaning	Typical evidence
A	**OEM Verified**	Explicitly documented in a manufacturer catalogue, instruction leaflet, drawing or bulletin (page cited).
B	**Strongly Corroborated**	Multiple independent credible sources agree (e.g. two distributors plus a photo of the label).
C	**Tentative**	Single non-OEM source, or plausible but incomplete evidence. Distributor compatibility claims are never above C on their own.
D	**Unverified**	Lead, hearsay or inference requiring investigation.

Evidence basis codes

Code	Meaning
oem_spec	Manufacturer specification text or table
oem_drawing	Manufacturer drawing
distributor	Distributor catalogue / listing
surplus_listing	Surplus / used-equipment listing
photo	Photograph of an actual part or label
field_measurement	Measured from a physical sample (record instrument and date)
inference	Engineering inference — never sufficient for compatibility

Safety and interchangeability notice

Matching dimensions do not establish electrical interchangeability. Panelboard and switchboard assemblies are listed as systems; substituting non-OEM or cross-manufacturer components may void the listing and short-circuit rating. Nothing in this catalogue states that a reproduced or aftermarket part is approved, listed or electrically equivalent unless an explicit, cited source says so. Distinguish OEM specifications from field measurements and manufacturing assumptions at all times.

2 Hardware Identification Guide

The drawings in this section are generic schematics prepared for this catalogue to illustrate terminology and measurement practice. They are not reproductions of manufacturer drawings and do not depict any specific OEM part.

2.1 Anatomy of a panelboard interior

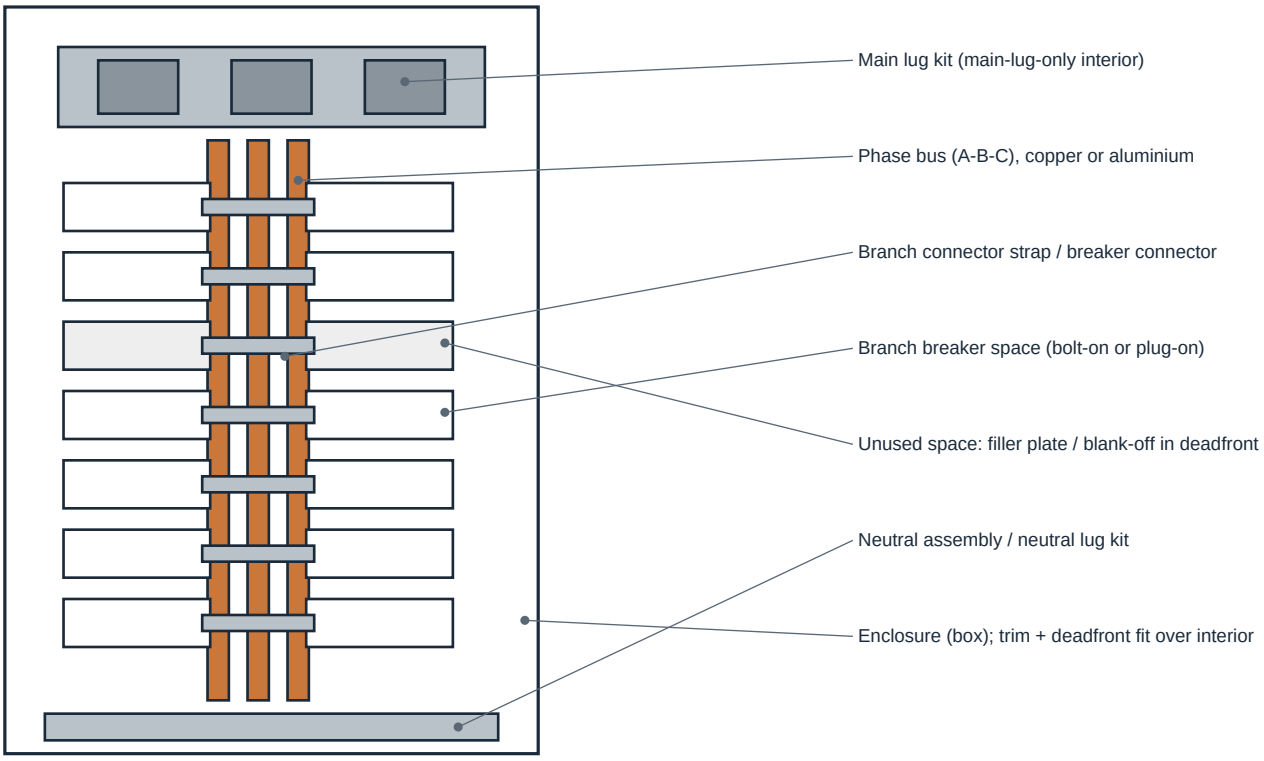

Generic schematic for orientation only — not an OEM drawing, not to scale

Figure 2-1. Generic panelboard interior showing where each component type installs.

2.2 Breaker mounting styles

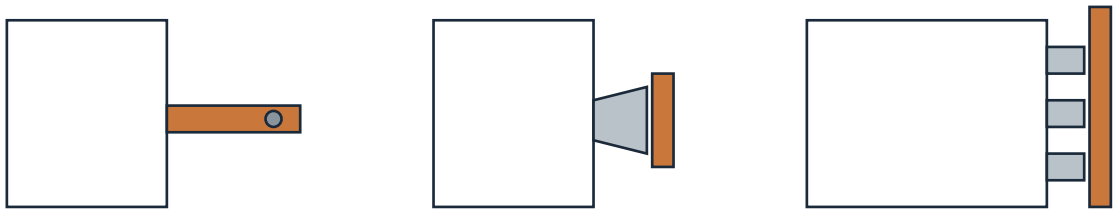

Bolt-on: line terminal screws to bus / connector strap

Plug-on: jaw/clip engages bus stab

Plug-on panel/switchboard unit: jaws onto vertical bus stack

Generic schematics — mounting style is a first-level identification key

Figure 2-2. Bolt-on, plug-on and panel/switchboard plug-on unit mounting.

2.3 Branch connector straps — what to measure

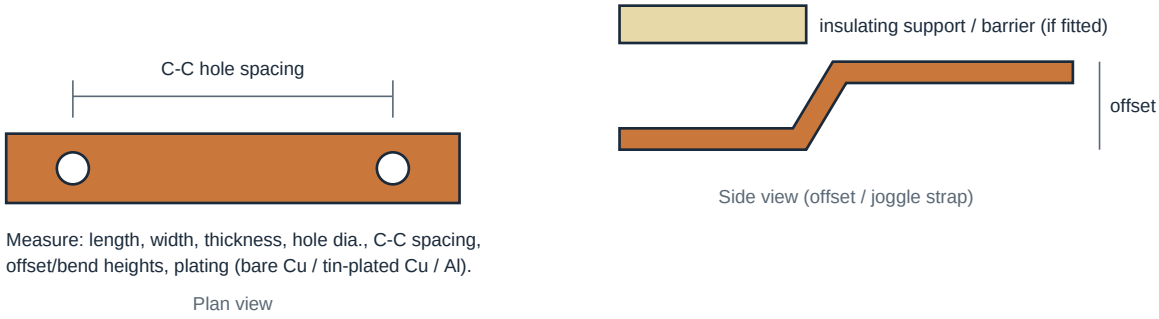

Figure 2-3. Measurement practice for connector straps and bus links.

2.4 Terminal lug types

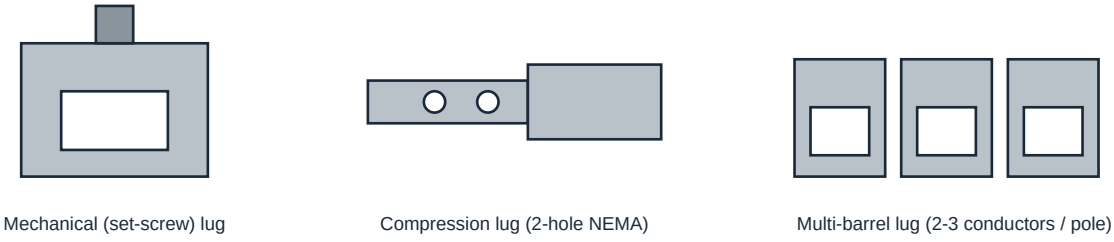

Figure 2-4. Common lug constructions found in main, sub-feed and feed-through lug kits.

2.5 Component-type key

Component type	Function / recognition	Entries
main-breaker-kit	Converts a main-lug interior to main-breaker; includes breaker mounting, connectors to bus.	166
main-lug-kit	Incoming-cable lugs bolted to bus top/bottom; ampere rating set by lug and bus.	251
sub-feed-lug-kit	Second set of lugs to feed a downstream panel from the same bus.	60
through-feed-lug-kit	Lugs at opposite bus end for feeding through to another panel.	9
lug-kit	Lug sets for breakers or assemblies.	380
lug		110
branch-connector-kit	Straps/connectors joining branch breakers to phase bus; series-specific.	432
breaker-mounting-kit	Hardware to mount a breaker frame in a panel/switchboard space.	267
connector-strap	Individual copper/aluminium link between bus and device terminal.	77
busbar		1
bus-assembly		1
neutral-assembly	Neutral bar/lug assembly, incl. 200% neutral options.	134
ground-bar	Equipment grounding bar kit.	37
interior		65
mounting-bracket		61
mounting-rail		8
standoff		1
insulator	Insulating support or standoff for bus or connectors.	9

Component type	Function / recognition	Entries
barrier	Insulating barrier between phases or sections.	137
deadfront	Inner cover exposing only breaker handles.	124
filler-plate	Closes unused breaker space in the deadfront.	295
trim	Front cover/door assembly (surface or flush).	296
box/enclosure		267
hardware-kit		124
fastener		106
conversion-kit	Adapts later breakers or interiors into legacy equipment.	138
spd-kit	Surge-protective-device mounting/connection kit.	34
meter-kit		10
switch-unit		150
fuse-kit		13
breaker-accessory		236
terminal-shield		19
rear-stud		30
handle-lock		47
padlock-attachment		115
other		185

2.6 Identification by physical feature

Parts for which distinguishing physical features are recorded. Use with the dimensions and hole-pattern fields of the entry.

Mfr	Features	Parts (OEM PN)
EAT	Eaton web classifies PRLSEBPD2/PRLSEBPD3 as a Power Defense molded case circuit breaker accessory 'terminal cover' (series PD2/PD3 Global) **A**	PRLSEBPD2, PRLSEBPD3
EAT	Kit name retains Westinghouse FB-frame designation; 100 A max (note a) **C**	KCDPFB100
EAT	Kit name retains Westinghouse KB-frame designation (KB/HKB -> JD per cross-reference) **C**	KCDPKB
EAT	Kit name retains Westinghouse LA-frame designation **C**	KCDPLA600
EAT	Kit name retains Westinghouse LB-frame designation **C**	KCDPLB
EAT	Kit name retains Westinghouse MC-frame designation **C**	KCDPMC
EAT	Note b: connector kits are not rated for 100 percent breakers **A**	KCDPNC
EAT	Main/feed lug wire range #4-1/0 **A**	RABR12B3XXX, RABR12H3XXX, RBBR30BCXXX, RBBR30BXXX, RBBR30H3XXX, RBBR30HCXXX, RBCH42L125
EAT	Main/feed lug wire range #8-2/0 **A**	RABR12L3125, RBBR30L3100
EAT	Main/feed lug wire range #4-2/0 **A**	RABR20BXXX, RABR20HXXX, RACH24L125
EAT	Main/feed lug wire range #14-2/0 **A**	RABR20L125
EAT	Main/feed lug wire range #2-1/0 **A**	RACH18B3XXX, RACH22BXXX, RBCH30BXXX
EAT	Main/feed lug wire range #6-2/0 **A**	RACH24L3125
EAT	Main/feed lug wire range #4-#1 **A**	RACH30L3125, RBCH42L3125
EAT	Main/feed lug wire range #4-4/0 **A**	RACH30L3225, RBBR24L3150, RBCH42L225, RBCH42L3225
EAT	Main/feed lug wire range #2-300 kcmil **A**	RBBR20BXXX, RBCH24BXXX, RCBR30BXXX, RCCH32BXXX, RDBR40BXXX, RDCH42BXXX
EAT	Main/feed lug wire range #1-300 kcmil **A**	RBBR30L200, RBCH32L225, RCBR40L200, RCCH42L225, RDBR42L225, RDCH42L225
EAT	Main/feed lug wire range #6-300 kcmil **A**	RBCH24D225, RBCH24D3225, RBCH30D3225, RBCH32D225, RCCH30D3225, RCCH32D225, RDCH42D225, RDCH42D3225
EAT	Main/feed lug wire range #4-300 kcmil **A**	RBCH30L3225, RCBR30L3200, RCCH42L3225, RDBR42L3225, RDCH42HXXX, RDCH42L3225, REBR42L3225
EAT	Main/feed lug wire range 2/0-300 kcmil **A**	RDBR30B3XXX, RDBR30H3XXX, RDCH42B3XXX, RDCH42H3XXX, REBR42B3XXX, REBR42H3XXX
EAT	Suffix 'I' appears to denote interior-only version of the RxCH retrofit kits (cf. existing RACH24L125 etc.) - inference from distributor titles 'Int Only' **D**	RACH24L125I, RDCH42B200I

Mfr	Features	Parts (OEM PN)
EAT	Indicating CUBEFuse requires date code R38 or later for correct fit; 1-3 A indicating CUBEFuse not available **A**	CCPB-n-xxCF
FPE	Label text includes 'J25 (HM1)' and 'LA25037' (meaning unknown) **C**	KCDP-1A
GEA	Main/single-branch kit includes 3 strap spacers used for left-hand cable connection (strap and spacer square holes aligned; carriage bolt passes through both) **A**	AMCB2FJ, AMCB3FJ
GEA	Terminal cover requires a 3/8 x 3/8 in relief hole when mounted as a main with an accessory cable leaving the load end **A**	AMCB2GM, AMCB3GM
GEA	Kit includes a B-phase isolator whose flaps fold up into the grooves of the TEY housing between phases; straps installed starting with the pole farthest from the 2.75 in dimension, carriage bolt head opposite the 2.75 in side **A**	AMCB4EY, AMCB6EY
GEA	Double-branch kit uses back-to-back outer and inner A&C straps and two B straps **A**	AMCB4FJ, AMCB6FJ
GEA	G-frame double straps carry threaded strap contact blocks on which the breaker line terminals rest; terminal cover installed over centre of assembly **A**	AMCB4GB, AMCB6GB
GEA	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole **A**	AMCB4QDFP, AMCB6QDFP
GEA	Requires minimum 'X2, 12 inches' of unspecified space. Text step 9 also says 'ASPP6TEY12D' (typo in OEM doc). **A**	ASPP6EY12D
GEA	Crossbar gap 0.06 in **A**	ASPP6EY6D
GEA	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, SE/TED/TQD 0 in **A**	ASPP6FB6D
GEA	Requires minimum 'X2, 12 inches' of unspecified space. Crossbar gap 0.06 in. **A**	ASPP6QB12D
GEA	Crossbar gap 0.06 in; after SG 0.582, SF/TFJ, SE/TED(6P), FB/TQD(6P) 1.875 in **A**	ASPP6QB6D
GEA	Crossbar gap 0.0525 in; after SG 0.582 in, after SF/TFJ 1.875 in **A**	ASPP6QD6D
GEA	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, TQD 0 in **A**	ASPP6SE6D
GEA	Crossbar gap 0.061 in; after SG 0.582 in. Filler plate is flipped for right-side mounting. **A**	ASPP6SF3S
GEA	Crossbar gap 0.002 in **A**	ASPP6SG3S
GEA	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices) **A**	AMC2GMFP, AMC3GMFP
GEA	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) **A**	SRFB3XT4FPK, SRFB3XT4FPX, SRFB3XT5MFPK, SRFB3XT5MFPX, SRFB3XT7MFPK, SRFB3XT7MFPX, SRFB6XT1FPK, SRFB6XT1FPX, SRFB6XT4FPK, SRFB6XT4FPX, SRFB6XT5BFPK, SRFB6XT5BFPX
GEA	Push-on filler snaps over flexible prongs on filler supports; barrier center riveted to filler **A**	AMCB6TEDL
GEA	Not UL listed (per table footnote) **B**	TC041
GEA	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit **A**	AMB2120DMA, AMB2120DMC, AMB2120MA, AMB3120DMA, AMB3120DMC, AMB3120MA, AMB3120MC
GEA	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off **A**	208C1850P3, 208C1850P4, 208C1850P5, 208C1850P6
SIE	Drawing ref 11-A-1157-01 / 11-D-2740-01 **A**	SEBKP1P2P3V1
SIE	Drawing ref 11-D-2733-01 **A**	SEBKP2V1
SIE	Drawing ref 11-D-2734-01 **A**	SEBKP2V2
SIE	Drawing ref 11-D-2735-01 **A**	SEBKP2V3
SIE	Drawing ref 11-D-2736-01 **A**	SEBKP2V4
SIE	Drawing ref 11-D-2738-01 **A**	SEBKP2V5
SIE	Drawing ref 11-D-2739-01 **A**	SEBKP2V6
SIE	Drawing ref 11-D-2898-01 **A**	SEBKP2V7
SIE	Drawing ref (p.11-67) **A**	SEBKP3V1, P3BK1
SIE	Drawing ref 11-A-1148-01 **A**	SEBKRP1V1, SEBKRP1V2
SIE	Drawing ref 11-A-1149-01 **A**	SEBKRP1V3, SEBKRP1V4
SIE	Drawing ref 11-A-1165-01 **A**	SEBKRP1V5
SIE	Drawing ref 11-A-1194-01 **A**	SEBKRP1V6
SIE	Drawing ref 11-B-1060-01 **A**	SEBKRP1V7
SIE	Notched end of end wall faces front **A**	EWK1, EWK1B, EWK2, EWK2B
SIE	2005 list price $845.00 **A**	6CLE2, 6E62
SIE	2005 list price $1553.00 **A**	6CLF1
SIE	2005 list price $2122.00 **A**	6CLJ1, 6JJ61, 6SCJ1, 6SJL1

Mfr	Features	Parts (OEM PN)
SIE	2005 list price $2525.00 **A**	6CLL1, 6LL61, 6SCL1, 6SLL1
SIE	2005 list price $1529.00 **A**	6F62, 6QJ2
SIE	2005 list price $2349.00 **A**	6JJ62
SIE	Drawing ref 11-D-2267-01 **A**	BBKB32
SIE	Drawing ref 11-D-2636-01 **A**	BBKQR1
SIE	Drawing ref 13-D-2011-13 **A**	BBKVA4P2P3
SIE	Drawing ref 11-D-2894-01 **A**	BBKVA5262P2S
SIE	2005 list price $2938.00 **A**	MG1D, SLM1D
SIE	2005 list price $3489.00 **A**	NG1D, SMND, SSMND
SIE	In P4 applications the B-phase set of straps MUST be taped together **A**	S3VA53T, S3VA53TD
SIE	2005 list price $768.00 **A**	SBLBD
SIE	Same branch-bus drawing family as Series 6 kit 6F62 (11-5098); items 3, 4 & 11 sub-assembled before packing **A**	SF6D
SIE	Drawing ref 11-D-2572-02 **A**	P1CONACPHCU
SIE	Drawing ref 11-D-2573-01 **A**	P1CONBPHAL
SIE	Drawing ref 11-D-2573-02 **A**	P1CONBPHCU
SIE	Eng./drawing ref 11-D-2644-01 (contains 11-D-3282-01, 11-D-4563-01, 11-D-4564-01) **A**	BBKQRP1FK
SIE	Eng./drawing ref 11-D-4565-01, 11-D-3283-01, 11-D-3284-01, 11-D-3288-01, 12-6812-34 **A**	BBKQRP2FK
SIE	Eng./drawing ref 11-D-3018-67 **A**	DFK07
SIE	Eng./drawing ref 11-D-3018-68 **A**	DFK08
SIE	Eng./drawing ref 11-D-2273-01 (strips 11-D-3018-01 thru -07) **A**	DFK1
SIE	Drawing ref 11-A-2010-01 **A**	P1SCRWS
SIE	Series 6 blank plate; 2005 list price $154.00 **A**	6FPB01
SIE	Series 6 blank plate; 2005 list price $175.00 **A**	6FPB02, 6FPB03, 6FPB05
SIE	Series 6 blank plate; 2005 list price $239.00 **A**	6FPB10
SIE	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole **A**	DFFP01A, DFFPV5363A
SIE	Eng./drawing ref 11-D-4612-01 **A**	DFFP01B
SIE	Eng./drawing ref 11-D-4600-01 **A**	DFFP01C
SIE	Eng. ref 11-D-4613-01; snap-in with small spring side tabs **A**	DFFP1A
SIE	Eng./drawing ref 11-D-2269-01 **A**	DFFP3
SIE	Eng./drawing ref 11-D-2270-01 **A**	DFFP6
SIE	Eng./drawing ref 12-A-1802-61 **A**	DFFPED01
SIE	Eng./drawing ref 12-A-1803-61 **A**	DFFPFD01
SIE	Eng./drawing ref 11-D-4522-61 **A**	DFFPJD01
SIE	Eng./drawing ref 11-D-4598-01 **A**	DFFPJD02
SIE	Eng./drawing ref 12-A-1804-61 **A**	DFFPQJ01
SIE	Eng./drawing ref 12-A-1804-62 **A**	DFFPQJ02
SIE	Eng./drawing ref 11-D-4604-01 **A**	DFFPVA41A
SIE	Eng./drawing ref 11-D-4617-01 **A**	DFFPVA5262A
SIE	Eng./drawing ref 11-D-4610-01 **A**	DFFPVA5262P2A
SIE	Eng./drawing ref 11-D-3340-01 / 11-D-4614-01 **A**	DFFPVA5262P2B
SIE	Eng./drawing ref 11-D-4599-01 (p.11-23) / 11-D-4617-01 (p.11-20) **A**	DFFPVA5363A
SIE	Eng./drawing ref 11-D-3033-61 (11-D-3033-01) **A**	DFP3AP01
SIE	Eng./drawing ref 11-D-4529-01 **A**	EBF1
SIE	Eng./drawing ref 11-D-2643-01 (p.11-20) / 11-D-4563-01 (p.11-23) **A**	MBKQRFK
SIE	Eng./drawing ref 11-D-4564-01 **A**	P2QRFP01
SIE	Drawing ref 11-D-2895-61 **A**	BBKVA5262P2HW
SIE	Drawing ref 11-A-2024-01 **A**	BK1A, IMK1
SIE	Drawing ref 11-D-2068-01 **A**	P2BK1
SIE	Drawing ref 11-D-2068-02 **A**	P2BK2
SIE	Drawing ref 11-D-2068-03 **A**	P2BK3

Mfr	Features	Parts (OEM PN)
SIE	Terminal assembly with binding screw, 'O'-ring wire-lug retainer; open binding screw 1/2in min before mounting **A**	TA1E6125
SIE	Drawing ref 11-A-1869-61 **A**	BNK350N
SIE	Supplied torque label to be placed over TA1Q300 torque information **A**	TCIQ250
SIE	Revised P1 interior part number ends in 'N' or 'T' (e.g. P1E42MC250AT); kit will not fit Original P1 **A**	MBKQJ1A, MBKQJ3A
SIE	Revised P1 interior part number ends in 'N' or 'T' **A**	MBKQR1A, MBKQR3A
SIE	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil **A**	4MLKA1, 4MLKA1A, 4MLKA3, 4MLKA3A
SIE	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU] **A**	4MLKA1B, 4MLKA3B
SIE	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil **A**	4MLKC1, 4MLKC3
SIE	Wire range (1) 1/0-600 kcmil, CU cable only **A**	4MLKC1A, 4MLKC3A
SIE	Wire range (1) #6 AWG-350 kcmil (CU or AL) **A**	MLKA1, MLKA1A, MLKA3, MLKA3A
SIE	Wire range (1) #6 AWG-350 kcmil (CU) **A**	MLKC1, MLKC1A, MLKC3, MLKC3A
SIE	Catalog number and amperage rating/wiring configuration shown on lug landing kit label on side sheet of pull section **A**	PLL44, PLL46, PLL48
SIE	Drawing ref 11-D-3323 **A**	P1DFS250AFT, P1DFS250ANFT
SIE	Drawing ref 11-D-3315 **A**	P1DFS400A
SIE	Drawing ref 11-A-1862 **A**	BNK2
SIE	Drawing ref 11-1850-01 / 11-C-2011-01 **A**	BNKP2EX1
SIE	For 3VA41/xGB RP1-250 panels, aluminum neutral riser extensions are replaced by the copper ones in the kit; BL/BQD/older xGB RP1-250 and all RP1-400 mount strips directly on riser **A**	CNLK42B, CNLK54B
SIE	Drawing ref 15-A-1800-61 **A**	LPP2NB01
SQD	External rings are NOT installed on I-Line enclosures **A**	LP9503
SQD	Surface-mount plate approx. 6.35 in. W x 4.5 in. H **C**	HLW4BL
SQD	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> **D**	CF16RJ63C36, CF20R63C, CF20RJ63C, CF25R63C, CF30RJ63C
SQD	Data sheet: mounting by screws; line and load (upstream/downstream); GTIN 785901686569 **A**	AL175JD
SQD	L-frame lugs are pre-tapped for control wire: 8-32 x 1/4 in screw (not provided) into tapped hole in lower left corner of lug **A**	AL400L61K3
SQD	Pan carries B/T hole marks; connection by 4 cable 'main lug wires' rather than bus straps **A**	NQMB2Q
SQD	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	QMB221HW, QMB221TW, QMB222HW, QMB222TW, QMB223HW, QMB223TW, QMB224W, QMB225W, QMB225WT3, QMB261HW, QMB261TW, QMB262HW, QMB262TW, QMB263HW, QMB263TW, QMB264W, QMB321HW, QMB321TW, QMB322HW, QMB322TW, QMB323HW, QMB323TW, QMB324W, QMB325W, QMB325WT3, QMB326W, QMB326WT3, QMB327WT3, QMB361HW, QMB361TW, QMB362HW, QMB362T21W, QMB362TW, QMB363HW, QMB363T31W, QMB363T32W, QMB363TW, QMB364W, QMB365W, QMB365WT6, QMB366W, QMB367W
SQD	Branch breaker covers are IP2X only when wire appropriate for the breaker ampere rating is installed **A**	QOFSLALB12

2.7 Equipment family identification key

Summary of every equipment family in the database: use era, voltage, main rating and the breaker types fitted to narrow down an unknown panel before looking up hardware. Values are the highest-confidence claim recorded; see the family sheet for evidence.

Family	Mfr	Type	Era	Voltage / mains	Branch breakers / features	Pg
BR	EAT	loadcenter	Made by Westinghouse's Bryant subsidiary, Bridgeport CT, until 1989 (Westinghouse and Brya			22
CDP	EAT	panelboard	Westinghouse power panelboard; with FDP, encompassed most Westinghouse MCCBs for more than	Up to 600 V AC, 250 V DC (1957); 1600 A maximum	Original EB/EHB/FB/HFB/KA/KB/JA/JB/DA/LA/LB/LC/MA/MC/NB/NC frames; retrofit with Series C EHD..ND via KCDP kit	70

Family	Mfr	Type	Era	Voltage / mains	Branch breakers / features	Pg
CH-BR-RETRO	EAT	other	Introduced as 'new' offering in undated Eaton Electrical guide (Eaton Electrical brand use	240 V max class (loadcenter-based plug-on CH 3/4 in and BR 1; MLO 100-225 A; main breaker 60-225 A (XXX = amp rating); AIC	Type CH (3/4 in per pole, CH110-CH3100 etc.) or Type BR (1 in per pole, BR/BRH/BJ/BD/BQ/GFCB/GFEP)	32
CHA-PM4	EAT	panelboard			Challenger CA, CE?, CF, CJ, CK, CL, CM, CN frames (inferred from kit names CCA4K, CED*, CFD*, CJD*, CKD*, CLD*	106
CHP/CHB	EAT	panelboard			CHP: Type CH plug-on; CHB: Type CHB bolt-on	113
EE	EAT	panelboard		1200 A maximum	Plug-in modules for CC, CCH, CHH, FS, FH, FL, JS, JH, JL, KS, KH, LS, LH, LL, MS, MH, NS, NH breakers and 30-8	113
EP	EAT	panelboard		1200 A maximum	FS, FH, FL, CC, CCH, CHH (2X/3X), JS, JH, JL (3X), LSB, LHB, LLB, LC (6X), MS, MH, MC, HMC 800 A (6X/12X), NS,	121
ES	EAT	switchboard	Introduced 1991 by Cutler-Hammer as replacement for their version of WF/WRP; Mullenbach (1	120-600 V; ES switchboard bus 600-4000 A; devices 15-4000 A; 10-200 kA		520
FDP	EAT	panelboard	Vintage Westinghouse	Up to 600 V AC, 250 V DC; 1600 A maximum	FDPW / FDPB fusible switches 30-1200 A (retrofit); breakers via 'picture frame' adapter (+2X); Measure vertical bus phase spacing: 3.50 in = kit-compatible; 4.25 in = no kits/parts	122
IFS	EAT	switchboard				520
MP100	EAT	panelboard	Shown on the Vol 12 time line together with MP40 (MP40/MP100)		M50 fusible switches	131
MP2	EAT	switchboard				521
MP40	EAT	panelboard	Product History Time Line (V12-T4-3) places Cutler-Hammer MP40/MP100 between the CHP/CHB/N	1600 A maximum	Original branch types per Eaton chart: CC, CCH, CHH, EB, EHB, EC, EHC, FB, HFB, FC, HFC, FH, FS, JA, JB, JS, J	138
NAB	EAT	panelboard	NA1B ('NAIB - AB De-ion') listed in 1946 Westinghouse NOFUZE catalog		E, EA, EAH, EH, FA, E-277 (replacement breaker REH; RHFA for FA)	147
NFB	EAT	panelboard			EB, EHB, EHC, EC, CA, CC, FB, HFB, FD, FC, FH, FS, HFC, CCH, CHH	147
NLAB	EAT	panelboard	Westinghouse panelboards manufactured between 1937 and 1988	NLAB in 120/208 V 3-phase 4-wire and 120/240 V use (installa	NLAB: QC; NPLAB/NQP: QP (new breaker HQP); NQB: BA (new BAB); NQC: QC	147
NM/NMM	EAT	panelboard	Sold as NOFUZE Multibreaker panelboards in 1946 (NMIB 115/240 V single-phase only; NMM 115	NMIB: 115/240 V AC single-phase only; NMM: 115/230 V AC	Westinghouse Multibreaker (1946); typical combinations 15 A 1-pole lighting, 20 A 2-pole water heater, 35/50 A	148
PB	EAT	panelboard		400 A maximum	Cutler-Hammer CH (plug-on) and CHB (bolt-on) breakers	148
PH	EAT	panelboard		PH: 800 A main lug only or 600 A main breaker; PH-L: 225 A m	CH, CHB, CC, CCH, CHH, EB, EHB, EC, EHD, FC, FS, FH, FD	156
PRC	EAT	panelboard	Introduced March 1996	240 or 480Y/277 Vac; 400 A max MLO/main	Bolt-on breakers 225 A max incl. remote-operated breakers	165
PRL-LX	EAT	panelboard	PRL1a/2a-LX introduced December 1997	PRL1a-LX 240 Vac; PRL2a-LX 480Y/277 Vac, 125/250 Vdc; 225 A max MLO or main	Bolt-on breakers 15-30 A (a-LX per s7) / 15-100 A (X-LX per s6)	165
PRL-RETRO	EAT	panelboard		1R: 240 Vac max (3ph4w 208Y/120, 240/120 delta, 1ph3w 120/24		170
PRL1/PRL2	EAT	panelboard	Westinghouse panelboards manufactured after 1988 (1988 redesign for Series C)	PRL1 240 V class (BAB); PRL2 480Y/277 (GHB) - inferred from ; 600 A maximum	PRL1: BAB-family QUICKLAG; PRL2: GHB-family (from replacement connector kits KPRL1BAB / KPRL2GHB)	171
PRL1A	EAT	panelboard	Introduced October 1996 (Cutler-Hammer); part of 'Pow-R-Line C' line introduced 1993	240 Vac maximum; Main lugs 100, 225, 400, 600 A; main breakers 100-600 A (MLO	Bolt-on QUICKLAG BAB/QBHW (incl. GF/AFCI/RP variants) or plug-on HQP/QPHW chassis, 15-100 A, 1-3 pole. Mains: ; Neutral bar in side gutter (Figure 1); same position as PRL1X/2X/2a	178
PRL1X	EAT	panelboard	Introduced 2020 (time line: May 2020)	240 Vac maximum; MLO 600 A max; main device 600 A max; sub-feed breaker 600 A	Bolt-on or plug-on QUICKLAG (BAB, QBHW, HQP, QPHW, GF/AF/EP variants) 15-100 A; mains/sub-feeds PDG2 (Power De	301
PRL2A	EAT	panelboard	Introduced October 1996	240 Vac or 480Y/277 Vac maximum; 250 Vdc. Not for 480 V delt; Main lugs 100, 225, 400 A (selection guide shows 600 A MLO/m	Bolt-on GHB (480Y/277 only), GHQ, HGHB, GHQRSP, GHBGFEP 15-100 A; mains GHB (horizontal), EHD, FDB, FD, HFD, F	318

Family	Mfr	Type	Era	Voltage / mains	Branch breakers / features	Pg
PRL2X	EAT	panelboard	Introduced 2020	240 or 480Y/277 Vac; 125/250 Vdc; MLO 600 A; main breaker 600 A	Bolt-on GHB-family 15-100 A; mains PDG2/PDG3/GHB	319
PRL3	EAT	panelboard	Pre-1994 Westinghouse	240/480/600 V class (F-frame kits rated 240/480/600 V; ED ki; 600 A maximum (400 A max bus rating for subchassis)	EHD/FDB/FD/HFD/FDC twin-mounted (KPRL3FD), ED/EDH/EDC (KPRL3ED), CA/CAH/HCA (KPRL3CA); BAB space on subchassis	320
PRL3A	EAT	panelboard	Introduced March 1994	240, 480 or 600 Vac maximum; 250 Vdc; Main lugs 100, 250, 400, 600, 800 A; main breakers 100-600 A	Branch 15-225 A bolt-on: BAB/QBHW family and GHB family (on KPRL3ABA/KPRL3AGB 6-24 circuit kits), EHD/FDB/FD/H; Neutral located in main gutter (end), not side gutter (Figure 1)	322
PRL3E	EAT	panelboard	Shown in January 2018 and June 2020 catalogs	240, 480Y/277 or 480 Vac; 250 Vdc; MLO 100, 250, 400, 600 A; main breakers 100-600 A	EGB/EGS/EGH (E-frame) 15-125 A, 1-3 pole; mains EG (horizontal), EDB/EDS/ED/EDH/EDC, FD/HFD/FDC, DK/KD/HKD/KDC	390
PRL3FQS	EAT	panelboard				390
PRL3X	EAT	panelboard	Introduced 2020	240, 480 or 600 Vac; 250 Vdc; MLO 800 A; main device 600 A	Bolt-on 15-225 A: BAB/QBH family, GHB family, PDG2 (twin to 150 A, single 175-225 A); vertical PDG2/PDG3 mains	418
PRL4	EAT	panelboard	PRL4B/F introduced October 1987	240, 480 or 600 Vac; 600 Vdc maximum; MLO 250, 400, 600, 800, 1200 A; main breakers 250-1200 A; ma	Bolt-on breakers 15-1200 A (EHD..FDC, ED, JD, DK/KD, CKD, LD, LG, LHH, MDL, ND, NHH, CA, FCL, LCL, FB-P, LA-P,	420
PRL4X	EAT	panelboard	Introduced 2020	240, 480 or 600 Vac; 600 Vdc; MLO 1200 A; main device 1200 A	Breakers 15-1200 A (Power Defense PDG2-PDG5 plus legacy Series C/G frames via KPRL4 kits); fusible switches 30	505
PRL5P	EAT	panelboard	Introduced August 1995	Up to 1200 A (lug units 400/600/800 A single bus, 1200 A dou	Plug-on adapter units with EHD..FDC, ED, JD, DK/KD, LD, MDL, ND (no 100% rated)	506
PRLC	EAT	switchboard	Introduced late 1980s (1988) by Westinghouse as successor to WF/WRP; built in Sumter SC an	240-480-600 Vac, 250 Vdc (2018 guide); 208-600 V (Vol 12 rat; Mains 400-6000 A; switchboard bus 600-6000 A (Vol 12)	Group-mounted feeders: bolt-on molded case breakers 15-1200 A (Table 21.0-2 lists bolt-on fixed MCCB 15-2500 A	521
PRLCS	EAT	switchboard				522
PRLXD	EAT	switchboard				523
PRLi	EAT	switchboard	Evolved in 1991 from Asheville 'Pow-R-I' (itself from WRI); built in Sumter SC	4000 A main bus maximum	Individually compartmentalized feeders: MCCB 15-1200 A compartmentalized, fusible switches 100-1200 A, Magnum	523
WEB	EAT	panelboard			WEB: EB (-> EB, EHD); WEHB: EHB; WFB: FB (-> FB, FDB); WCA: CA; WGB: GB; WGHB: GHB	520
WF/WRP	EAT	switchboard	Introduced 1955 by Westinghouse, St. Louis MO; design transferred 1988 to Sumter SC and Vi	120-600 V; Switchboard bus 600-4000 A; protective devices 15-4000 A; 10	Group (panel)-mounted molded-case breakers or FDP fusible switches as feeders; mains DS, SPB, bolted pressure	523
BDP	FPE	panelboard			NE/NEF/HEG (KBDP1C), NEJ/NEJH/HEJ (KBDP2C), [KBDP3C frame not stated], NJL/HJL (KBDP4C), NM/HNM (KBDP5C)	1847
CDP	FPE	panelboard	Advertised May 1962: distribution panelboards types NHDP and CDP with rotary-handle breake	600 V class (kits KCDP1C, KCDP5C listed 600 V)	FPE rotary-handle molded case breakers 15-800 A (1962)	1852
FDP	FPE	panelboard			QMQB fusible panelboard switches 30-1200 A, 240 V (QMQB..32..) and 600 V (QMQB..36..), 200 kA with class R/J/K	1858
FPE-SWBD	FPE	switchboard		HCB through 2000 A; VCB through 6000 A	NJL/HJL, NJJ, NM/HM (trip units NM03xxxx), NN switches, NP (to 1600 A); Fusematic X-frame XF/XJL current-limit	1868
NA1B	FPE	panelboard			Stab-Lok NA/NB branch breakers (assumed for NA1B); NE/NEF twin-mounted feeders/mains via KCDP-1A / NAIB-NEF ki	1865
NBLP	FPE	panelboard			NB bolt-on miniature breakers (NBLP); NQ breakers (NQLP, e.g., NQ111050)	1867
NDP	FPE	panelboard			NE/NEF and NEJ/NEJH/HEJ twin-mounted with strap kits NDPNE, NDPNEJ	1867
A-SERIES	GEA	panelboard		AL/AQ 240 Vac max; AE/AS 480Y/277 Vac, 125/250 Vdc; AD 600 V; Main lug 125-800 A (AD 150-800 A); main breaker up to 800 A	AL plug-in THQL/THHQL/TXQL; AQ bolt-on THQB/THHQB/TXQB; AE bolt-on TEY/TEYF/TEYD/TEYH/TEYL; AD bolt-on TED/THE	1054
A-SERIES-COL	GEA	panelboard		Main lug 125-225 A; mains THQB/THHQB/TEY/SE 100 A, TQD/THQD/		1095
A-SERIES-PWR	GEA	panelboard		Mains 125-800 A SG/SK breakers; main lug 600-800 A	AQP: QB 15-100 A, double branch TQD/SE, center-mounted SF/SG. AEP: TEY/TEYF, double branch TED/SE, center SF/S	1096
AV-LINE	GEA	switchboard				1372

Family	Mfr	Type	Era	Voltage / mains	Branch breakers / features	Pg
CCB-QMR	GEA	panelboard	Types NCB and CCB listed as GE power distribution panelboards in March 1955; 1951 Trumbull	1951 Convertible CB panelboards: max 250 V DC, 600 V AC; mai		1110
CONVERTI-FUSE	GEA	panelboard	Safe-Converti-Fuse introduced by Trumbull c.1930; Converti-Fuse and Swing-Wa catalogued 19	Converti-Fuse: max 250 V DC, 575 V AC, mains 1200 A lugs or		1149
NHB	GEA	panelboard	NAB catalogued 1951 (Trumbull, Type AT breakers); 'Types NAB, NHB' listed in GE March 1955	NAB: 125 V DC, 125-250 V or 250 V AC; ABH: max 250 V AC, 125; ABH: max 400 A lugs or 225 A circuit breaker mains	NAB: Type AT, 1/2/3-pole 15, 20, 25, 35, 50 A, one sub-feed up to 225 A; ABH: AT 15-50 A 1/2/3-pole on back pl	1150
NLAB	GEA	panelboard	NLAB (formerly NTQ) and NLTQ catalogued 1951; NLTQ introduced c.1951 as 'Trumbull's new NL	3-wire 120/240 V AC or 4-wire 3-phase 120/208 V AC; branches; Lugs and neutral 100, 225, 400, 600 A (lug table in GEG-1361	NLAB: GE Type TQ (1951), later TQC (handle lock/padlock list); NLTQ: plug-in Type TQL; TQB and TBQ also listed; Breaker family on interior: TQ/TQC/TQB/TQL (GE) vs QC/Quicklag (Westinghouse NLAB); renewal parts card behind	1151
RG-LIGHTING	GEA	panelboard				1158
RG-NEXT	GEA	panelboard		up to 600 Vac 3ph3w / 600Y/347 V; Bus 250-1200 A Cu or Al; MLO, MCB (vertical or horizontal) o	Tmax XT1/XT4/XT5/XT6/XT7, Record Plus FB (FBV/FBN/FBH/FBL), TEY (TEYD/TEYH/TEYL); 15-1200 A	1161
RG-SB	GEA	switchboard	Introduced c.2020 (Electrical Wholesaler Top 10 New Product Picks Sept 2020); replaced Spe		Tmax XT plug-in spring-loaded circuit breakers in IP20 finger-safe bus stack; SACE Emax 2 drawout mains	1373
SCP-PLUS	GEA	panelboard				1163
SPECTRA-PP	GEA	panelboard		600 Vac / 250 Vdc max; Main bus 250-1200 A Cu or Al; mains up to 1200 A lugs, break	Double-branch SE, SF, SG, FG, FB, TEY, TEB, TQD (and THQB); center-mounted SK; plug-in version also ADS fusibl	1184
SPECTRA-SB	GEA	switchboard	GET-8032C catalog dated 02/2013 (marked "GE legacy document"); phased out by ABB 2021: no	Pro-Stock program: 1200, 1600, 2000 A main bus, copper or al	{'value': 'Distribution sections use Spectra plug-in panel (C/B feeders only) with the same AMC...FP plug-in c	1374
TRUMBULL	GEA	panelboard	Trumbull Electric Mfg. Co., Plainville CT, labelled 'A General Electric Organization'; spl		GE-type plug-in (TQL/THQL family) in later panels; ATB-type breakers reported in older Trumbull switchboards (	1371
COMMANDER	OTH	loadcenter				1890
FA	OTH	panelboard	Company founded 1891 St. Louis; panels/breakers made through the 1950s (installed c.1900-1		Fused switches (Fuselok, PULFUZSW, KLAMPSWFUZ); Zinsco-type QSF units in some Frank Adam panelboards; FPE NFJ	1890
IEM-CDP	OTH	panelboard				1891
KINNEY	OTH	panelboard				1893
WADSWORTH	OTH	panelboard	Common 1950s-1960s; forum claims no Wadsworth breakers made since c.1970 (unsourced)		Wadsworth A-series (A15NI, A20NI, A230NI, A240NI, A250NI, A260NI, A320, A360, A390) and B-series (B1515, B1530	1893
CDP-ITE	SIE	panelboard				1469
CDP6	SIE	switchboard	Strap kits fit switchboards manufactured since 1974			1708
MURRAY	SIE	loadcenter	Murray line owned by Crouse-Hinds (Cooper) by late 1970s; Siemens bought line c.1992 and r		Murray MP / MP-T / MP-HT plug-in; MD-series 2P mains (MD200-H, MD2150V); MEQ9985 / MEQ9683R 150 A 4P 120/240 M	1469
NLAB	SIE	panelboard	Listed in 1985 Canadian distributor price book under 'ITE - Siemens Distribution Equipment	NLAB, NHB: 240 V class ('NLAB, NHB-240V basic panel selector	BQ bolt-on (and BQH / HBQ) breakers; HR-7 panels for plug-in breakers; some HB breakers single-branch mounted	1471
P1	SIE	panelboard	Pre-2014/2015 (replaced by Revised P1); listed in SPEEDFAX 2007-2008		BL, BLH, HBL, BQD, NGB/HGB/LGB	1472
P2	SIE	panelboard			BL/BQD, xGB/3VA41, ED, GB2, QR, 3VA52/61/62 via strap kits	1482
P3	SIE	panelboard				1507
P4	SIE	panelboard		Branch devices to 800A (MG1) per strap kit table		1516

Family	Mfr	Type	Era	Voltage / mains	Branch breakers / features	Pg
P5	SIE	panelboard		Branch devices to 1200A (NG1D/SMND)		1561
PUSHMATIC	SIE	panelboard	Bulldog Electric Products Co. (Detroit; patents from 1934-36, panelboard patent US 2,428,3	120/240 V 1-ph; some 120/208Y 3-ph panels	Pushmatic push-button breakers (P-series e.g. P1515 dual 15 A condensed); bolt-on to bus	1603
RP1	SIE	panelboard	Introduced 2015 per SpeedFax p.11-7 note ('Revised P1 was introduced in 2015'); p.11-11 ta	240V AC max for P1A/P1X; 480Y/277V for P1E/P18; 600Y/347V li; 250A or 400A bus; 400A max mains	BL/BLH/HBL, BQD, BT twin (P1A/P1X/P1E); xGB (NGB/HGB/LGB) and 3VA41 (P18 interiors only)	1610
S1/S2	SIE	panelboard				1705
SB	SIE	switchboard				1720
SBP	SIE	switchboard		400-1200 A (connector table 400/600/800/1000/1200 A)		1738
SE	SIE	panelboard				1708
I-LINE	SQD	panelboard	Catalog copyright 1998-2019	600 Vac, 250 Vdc; 400-1200 A (HCJ 400-800 A; HCP/HCR-U to 1200 A)	I-Line plug-on: BD/BG/BJ, QB/QD/QG/QJ, HD/HG/HJ/HL/HR, JD/JG/JJ/JL/JR, LA/LH, LG/LJ/LL/LR, MG/MJ, PG/PJ/PL, RG	703
MLN	SQD	panelboard	Sold in the USA from 1962 to 1968		ML breakers (side label part number 999xxx per forum); later FAL, KAL, LAL, MAL via adapter kits; dealer 'ML1'; ML breakers carry a side label with a part number like 999xxx	781
NA1B	SQD	panelboard	Advertised by Square D in September 1960	AC or DC (E frame bolted connection); Main lugs 225 A (300 MCM), 400 A and 600 A (2-500 MCM); main	Square D E-frame bolted breakers	787
NEHB	SQD	panelboard	1983-1995	NY1B (Canada 1985): 240/416 V, 277/480 V, 346/600 V AC with	EH (plug-on), EHB (bolt-on)	787
NF	SQD	panelboard	Series 0: 1995-Oct 2008; Series E1: Oct 2008-present	600Y/347 Vac max (480Y/277 Vac with EDB/EGB/EJB US breakers); 125, 250, 400, 600 A merchandised; 800 A factory assembled	EDB, EGB, EJB (E-frame bolt-on); EDB/EGB/EJB EPD	789
NH1B	SQD	panelboard	Catalogued in Square D Digest 152 (1970); NEHB is not in the 1970 index (later successor -	480 V AC max, AC only; 277/480 V 3-ph 4W, 480 V; 1-ph 2W/3W,; Main lugs 100 A, 225 A (1-300 MCM), 400 A (2-600 MCM); main	FY 1-pole 15-50 A (277 V AC max) and FA 2/3-pole 15-100 A, plug-on or bolt-on (LX bolt-on FA 15-50 A)	819
NQ	SQD	panelboard	2008-present (replaced NQOD in 2008)	240 Vac, 48 Vdc max; 100, 225, 400, 600 A merchandised (250 A main breaker interi	QO plug-on and QOB bolt-on (incl. -VH, -H, AFCI/GFI); 175/200 A QO only in single-phase 400/600 A interiors	819
NQO	SQD	panelboard	late 1960s-1987		Q1 / Q1B	890
NQOB	SQD	panelboard	Advertised by Square D in May and September 1960 (NQO plug-in, NQOB bolted connection); a	250 V class AC only (1960: NQO and NQOB 'AC only'); 120/240 ; NQO: 400 A lugs / 400 A main breaker; NQOB: 600 A lugs / 400	1960 USA: QO plug-on / QOB bolt-on 1-pole 15-50 A, 2-pole 15-70 A and 70-100 A, 3-pole 15-50 A and 70-100 A; C	898
NQOD	SQD	panelboard	1987-2008		QO / QOB	904
QED-2	SQD	switchboard	Catalog 2700CT1101 copyright 1995-2012; 'connect to existing' list names generations QED-2	600 Vac or 250 Vdc max; Sections to 5000 A horizontal bus, 3000 A vertical bus; sing	Group-mounted I-Line: FA, FH, HD, HG, HJ, HL, QB, QD, QG, QJ, JD, JG, JJ, JL, LA, LH, LC, LI, FI, KI, MG, MJ,	994
QMB	SQD	panelboard	Catalog 4620CT9601 copyright 1985-2015; current design post-October 1984 (older QM/QW inte	600 Vac / 250 Vdc max; Main lug interiors 225-1200 A; main switch 200-800 A; QMJ on	QMB twin and single fusible switch units 30-800 A (1200 A in QED-2 only), QMJ Class J switch units 30-600 A, Q	923
QMB-LEGACY	SQD	panelboard	QM (31 in. wide box) and QW (38 in. wide box) interiors built before October 1984; pre-196			978
SPEED-D	SQD	switchboard	In 2700CT1101 (2012)			1000
SQD-NQNF-RETRO	SQD	other				703
ZIN-DIST	ZIN	panelboard		240 V (QSF..33) and 600 V (QSF..53) switch units	QSF fusible switches 30-600 A (T-prefix = twin); bolt-on breakers QB, QFB; FPE N-frame breakers NE/NEF, NEJ, N	1871
ZIN-Q	ZIN	panelboard	Zinsco Electric (Los Angeles) from 1943; Magnatrip breakers patented 1950; copper bus unti	120/240 V 1-ph and 240 V 3-ph (Q24/QFP24 3-pole mains); to 225 A (e.g., MLB20(..)C 225 A max; main lug blocks LK-15	Q, QC, QCN, Q24, R38/RC38 twin, HRGF; bolt-on QB/QCB; mains QFP/QFL/QFB/QFBL	1876

3 Eaton lineage

Lineage / brand markings: Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant

Family	Type	Status	Era	Entries	Pg
BR Type BR loadcenter	loadcenter	current (Eaton Type BR)	Made by Westinghouse's Bryant subsidiary, Bridgeport CT, until 1989 (Westinghouse and Bryant nameplates); Westinghouse bought Challenger Electric 1988, redesigned the product and moved production to Jackson MS; from 1995 Eaton moved all loadcenter production to Lincoln IL	13	22
CH-BR-RETRO Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	other	Unknown whether still offered as standard kits; Eaton continues custom retrofit interiors via Flex Centers	Introduced as 'new' offering in undated Eaton Electrical guide (Eaton Electrical brand used c.2003-2008)	66	32
CDP Westinghouse CDP / HCDP distribution panelboard	panelboard	Obsolete; retrofit and connector kits available from Sumter Plant Aftermarket	Westinghouse power panelboard; with FDP, encompassed most Westinghouse MCCBs for more than 34 years (to 1988 redesign); Cutler-Hammer also built CDP under supply agreement	60	70
CHA-PM4 Challenger distribution panelboards (PM4a / PM4b)	panelboard	Obsolete (Challenger acquired by Westinghouse late 1980s/1994; Eaton from 1994); kits available as surplus	—	32	106
CHP/CHB Cutler-Hammer CHP / CHB lighting panelboards	panelboard	Out of production; connectors not available (note 2)	—	0	113
EE Cutler-Hammer Type EE plug-in power panelboard / switchboard	panelboard	Out of production; parts via RP01400003E	—	25	113
EP Cutler-Hammer Type EP plug-in power panelboard	panelboard	Out of production; parts via RP01400003E	—	29	121
FDP Westinghouse FDP fusible distribution panelboard	panelboard	Obsolete; switch retrofit/connector kits available	Vintage Westinghouse	47	122
MP100 Cutler-Hammer MP100 fusible distribution panelboard	panelboard	Out of production; parts from Sumter SC Aftermarket Center	Shown on the Vol 12 time line together with MP40 (MP40/MP100)	17	131
MP40 Cutler-Hammer MP40 distribution panelboard	panelboard	Out of production; supported by Eaton Aftermarket Center, Sumter SC (renewal parts RP01400003E)	Product History Time Line (V12-T4-3) places Cutler-Hammer MP40/MP100 between the CHP/CHB/NFB era and the 1988 Pow-R-Line redesign (exact start/end years not legible in text extraction)	30	138
NAB Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	panelboard	discontinued; connectors not available; replacement panelboard PRL3a (NAB, NA1B, NDP, NEB, NHDP, NHEB, ABH) or PRL2a (NH1B); panelboard-only replacement breaker REH/RHFA	NA1B ('NAIB - AB De-ion') listed in 1946 Westinghouse NOFUZE catalog	0	147
NFB Cutler-Hammer NFB panelboard	panelboard	unknown	—	17	147

Family	Type	Status	Era	Entries	Pg
NLAB Westinghouse NLAB lighting panelboard	panelboard	discontinued; connectors not available; replace panelboard with PRL1a (NLAB, NPLAB, NQB, NQP, NQC), PRL1aLX (NLAB-LX), PRL3a (NLAB-AB/ABH)	Westinghouse panelboards manufactured between 1937 and 1988	1	147
NM/NMM Westinghouse NM / NMM / NMIB Multibreaker panelboards	panelboard	Obsolete; no Vol 12 replacement row found	Sold as NOFUZE Multibreaker panelboards in 1946 (NMIB 115/240 V single-phase only; NMM 115/230 V AC); Vol 12 time line lists 'Westinghouse NM/NMM' among the earliest types	0	148
PB Cutler-Hammer Type PB lighting panelboard	panelboard	Out of production; connectors not available (chart note 3)	—	29	148
PH Cutler-Hammer Type PH / PH-L panelboard	panelboard	Out of production; parts/retrofit kits via RP01400003E and Sumter Aftermarket Center	—	28	156
PRC Pow-R-Command lighting control panelboard	panelboard	Current (Pow-R-Command E series in 2020 catalog)	Introduced March 1996	22	165
PRL-LX Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	panelboard	Legacy (a) / current (X)	PRL1a/2a-LX introduced December 1997	20	165
PRL-RETRO Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	panelboard	unknown	—	0	170
PRL1/PRL2 Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	panelboard	Obsolete; limited renewal parts (Sumter Aftermarket Center) per Feb 2013 guide	Westinghouse panelboards manufactured after 1988 (1988 redesign for Series C)	27	171
PRL1A Pow-R-Line 1a	panelboard	Legacy; renewal parts still listed April 2021. Superseded by PRL1X (Pow-R-Line Xpert, introduced 2020; time line shows PRL1X/2X/3X/4X from May 2020)	Introduced October 1996 (Cutler-Hammer); part of 'Pow-R-Line C' line introduced 1993	314	178
PRL1X Pow-R-Line Xpert 1X	panelboard	Current	Introduced 2020 (time line: May 2020)	270	301
PRL2A Pow-R-Line 2a	panelboard	Legacy; renewal parts listed April 2021; superseded by PRL2X	Introduced October 1996	312	318
PRL2X Pow-R-Line Xpert 2X	panelboard	Current	Introduced 2020	269	319
PRL3 Westinghouse Pow-R-Line 3 (vintage)	panelboard	Obsolete; limited renewal parts	Pre-1994 Westinghouse	15	320
PRL3A Pow-R-Line 3a	panelboard	Legacy; renewal parts listed April 2021; superseded by PRL3X. Deadfront/filler hardware changed for panels built after April 2019 (distributor wording)	Introduced March 1994	250	322
PRL3E Pow-R-Line 3E	panelboard	Current in June 2020 catalog	Shown in January 2018 and June 2020 catalogs	9	390
PRL3FQS Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	panelboard	unknown	—	95	390
PRL3X Pow-R-Line Xpert 3X	panelboard	Current	Introduced 2020	192	418
PRL4 Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	panelboard	Legacy; renewal parts listed April 2021; superseded by PRL4X/PRL4DX (PRL4F continues in Xpert catalog)	PRL4B/F introduced October 1987	211	420

Family	Type	Status	Era	Entries	Pg
PRL4X Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	panelboard	Current	Introduced 2020	151	505
PRL5P Pow-R-Line 5P plug-on distribution panelboard	panelboard	Discontinued (dropped from 2021 renewal parts; in 2009 and 2017 editions)	Introduced August 1995	51	506
WEB Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	panelboard	discontinued; replacement panelboard type PRL3a (WGB/WGHB -> PRL2a)	—	3	520
ES Cutler-Hammer Type ES switchboard	switchboard	discontinued (Vol 12 lists as legacy; new PRLC can connect via transition section)	Introduced 1991 by Cutler-Hammer as replacement for their version of WF/WRP; Mullenbach (1962) heritage; used exclusively Westinghouse MCCBs	23	520
IFS Integrated Facility System switchboard	switchboard	current (2018 consulting guide)	—	0	520
MP2 Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	switchboard	Out of production; renewal parts RP01400003E 'Renewal Parts Data for MP40 and MP-200'	—	39	521
PRLC Pow-R-Line C switchboard	switchboard	current (listed in April 2018 consulting guide)	Introduced late 1980s (1988) by Westinghouse as successor to WF/WRP; built in Sumter SC and Visalia CA; current Eaton product	2	521
PRLCS Pow-R-Line CS switchboard	switchboard	current (Canadian market; manual IB015002EN effective Nov 2021)	—	0	522
PRLXD Pow-R-Line XD switchboard	switchboard	unknown	—	0	523
PRLi Pow-R-Line i switchboard	switchboard	current (2018 consulting guide)	Evolved in 1991 from Asheville 'Pow-R-I' (itself from WRI); built in Sumter SC	0	523
WF/WRP Westinghouse WF/WRP switchboard	switchboard	discontinued (superseded by Pow-R-Line C)	Introduced 1955 by Westinghouse, St. Louis MO; design transferred 1988 to Sumter SC and Visalia CA as Pow-R-Line C	7	523

3.1 BR — Type BR loadcenter

FAM-EAT-026 · loadcenter · aka BR, Bryant BR, Challenger BR, Type BR · markings: Bryant, Challenger, Cutler-Hammer, Eaton, Westinghouse

1-in-per-pole plug-on residential/light-commercial loadcenter family with Westinghouse/Bryant/Challenger lineage. Vol 12 Tab 5 lists replacement main/subfeed lug blocks, filler plates, interlocks and handle accessories.

Attribute	Value	Cl.	Sources
Status	current (Eaton Type BR)	A	S21 p. V12-T5-2; oem_spec
Era of manufacture	Made by Westinghouse's Bryant subsidiary, Bridgeport CT, until 1989 (Westinghouse and Bryant nameplates); Westinghouse bought Challenger Electric 1988, redesigned the product and moved production to Jackson MS; from 1995 Eaton moved all loadcenter production to Lincoln IL	A	same as above

Breaker families associated: BR

Key documents: S21 CA08100014E Tab 5 Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00453	**BRL200**	Type BR loadcenter main lugs (BRL200)	—	listed October 2016

EDH-EAT-00453	BRL200	Eaton	main-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main lugs (BRL200)

OEM part number	BRL200	**A**	S21 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676460101	**A**	S251 alias; skuPage.BRL200 (General/Product specifications); oem_spec
Description	Main lugs, two-pole 200 A stud mounted (includes deadfront filler plate), #1-300 kcmil	**A**	S21 pp. V12-T5-14..T5-16; oem_spec
	Eaton Loadcenter Main Devices,Main lug kit,200 A,Stud,Two-pole,Used with Type BR Loadcenters and Circuit Breakers,120/240 V, 208 Y/120, 240 V,#1 AWG-300 kcmil Cu/Al (Eaton web product description)	**A**	S251 skuPage.BRL200 (General/Product specifications); oem_spec
Installation location	Mounting: Stud	**A**	same as above
Poles	Two-pole	**A**	same as above
Voltage rating	120/240V, 208Y/120, 240V	**A**	same as above
Current rating	200 A	**A**	same as above
Kit contents	Used with Type BR Loadcenters and Circuit Breakers	**A**	same as above
Wire range	#1 AWG-300 kcmil Cu/Al	**A**	same as above
Status	listed October 2016	**A**	S21 oem_spec
Listing / approvals	UL Listed	**A**	S251 skuPage.BRL200 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics weight 1 lb (dimension attributes are placeholders 1 in/1 in/1 in) (Placeholder dimensions - do not use)	**A**	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00452	**3BRS225**	Type BR loadcenter main and subfeed lug block (3BRS225)	For BR loadcenter **A**	listed October 2016
EDH-EAT-00451	**3BRSF150**	Type BR loadcenter main and subfeed lug block (3BRSF150)	For BR loadcenter **A**	listed October 2016
EDH-EAT-00450	**BRS225**	Type BR loadcenter main and subfeed lug block (BRS225)	—	listed October 2016
EDH-EAT-00448	**BRSF125**	Type BR loadcenter main and subfeed lug block (BRSF125)	—	listed October 2016
EDH-EAT-00449	**BRSF150**	Type BR loadcenter main and subfeed lug block (BRSF150)	—	listed October 2016

EDH-EAT-00452	3BRS225	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (3BRS225)

OEM part number	3BRS225	A	S21 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676461504	A	S251 alias; skuPage.3BRS225 (General/Product specifications); oem_spec
Description	Main and subfeed lug block, 3-pole 225 A, 6 spaces, #2-300 kcmil	A	S21 pp. V12-T5-14..T5-16; oem_spec
	Eaton Loadcenter Field Installation Kits and Parts,Requires (6) 1 in spaces,Main and sub-feed lug blocks,225 A,Three-pole,For BR loadcenter,#2 AWG-300 kcmil (Eaton web product description)	A	S251 skuPage.3BRS225 (General/Product specifications); oem_spec
Breaker compatibility	For BR loadcenter (Eaton web 'Used with' attribute)	A	same as above
Poles	Three-pole	A	same as above
Current rating	225 A	A	same as above
Kit contents	Requires (6) 1 in spaces	A	same as above
Wire range	#2 AWG-300 kcmil	A	same as above
Status	listed October 2016	A	S21 oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.3BRS225 (General/Product specifications); oem_spec
Installation requirements	(6) 1 in spaces needed (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics weight 1 lb (dimension attributes are placeholders 1 in/1 in/1 in) (Placeholder dimensions - do not use)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00451	3BRSF150	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (3BRSF150)

OEM part number	3BRSF150	A	S21 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676001786	A	S251 alias; skuPage.3BRSF150 (General/Product specifications); oem_spec
Description	Main and subfeed lug block, 3-pole 150 A, 3 spaces, #8-2/0 (75 C only)	A	S21 pp. V12-T5-14..T5-16; oem_spec
	Eaton Field Installation Kits and Parts,Requires (3) 1 in spaces,Main and sub-feed lug blocks,150 A,Three-pole,For BR loadcenter,#8-2/0 AWG Cu/Al (Eaton web product description)	A	S251 skuPage.3BRSF150 (General/Product specifications); oem_spec
Breaker compatibility	For BR loadcenter (Eaton web 'Used with' attribute)	A	same as above
Poles	Three-pole	A	same as above
Current rating	150 A	A	same as above
Kit contents	Requires (3) 1 in spaces	A	same as above
Wire range	#8-2/0 AWG Cu/Al	A	same as above
Status	listed October 2016	A	S21 oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.3BRSF150 (General/Product specifications); oem_spec
Installation requirements	(3) 1 in spaces needed (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics weight 1 lb (dimension attributes are placeholders 1 in/1 in/1 in) (Placeholder dimensions - do not use)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00450	BRS225	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRS225)

OEM part number	BRS225	A	S21, S251 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676461405	A	S251 alias; skuPage.BRS225 (General/Product specifications); oem_spec
Description	Main and subfeed lug block, 2-pole 225 A, 4 spaces, #2-300 kcmil	A	S21 pp. V12-T5-14..T5-16; oem_spec
	Eaton Field Installation Kits and Parts - Main and Sub-feed Lug Blocks,Requires (4) 1 in spaces,Main and sub-feed lug blocks,225 A,Two-pole,#2 AWG-300 kcmil (Eaton web product description)	A	S251 skuPage.BRS225 (General/Product specifications); oem_spec
Poles	Two-pole	A	same as above
Current rating	225 A	A	same as above
Kit contents	Requires (4) 1 in spaces	A	same as above
Wire range	#2 AWG-300 kcmil	A	same as above
Status	listed October 2016	A	S21 oem_spec
	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	S251 skuPage.BRS225 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.BRS225 (General/Product specifications); oem_spec
Installation requirements	(4) 1 in spaces needed (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 4.5 in, height 3.5 in, width 3.75 in, weight 0.46 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00448	BRSF125	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRSF125)

OEM part number	BRSF125	A	S21 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676001762	A	S251 alias; skuPage.BRSF125 (General/Product specifications); oem_spec
Description	Main and subfeed lug block, 2-pole 125 A, 2 spaces, #8-2/0 (75 C only)	A	S21 pp. V12-T5-14..T5-16; oem_spec
	Eaton Field Installation Kits and Parts,Requires (2) 1 in spaces,Main and sub-feed lug blocks,125 A,Two-pole,#8-2/0 AWG Cu/Al (Eaton web product description)	A	S251 skuPage.BRSF125 (General/Product specifications); oem_spec
Poles	Two-pole	A	same as above
Current rating	125 A	A	same as above
Kit contents	Requires (2) 1 in spaces	A	same as above
Wire range	#8-2/0 AWG Cu/Al	A	same as above
Status	listed October 2016	A	S21 oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.BRSF125 (General/Product specifications); oem_spec
Installation requirements	(2) 1 in spaces needed (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics weight 1 lb (dimension attributes are placeholders 1 in/1 in/1 in) (Placeholder dimensions - do not use)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00449	BRSF150	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRSF150)

OEM part number	BRSF150	**A**	S21 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676001779	**A**	S251 alias; skuPage.BRSF150 (General/Product specifications); oem_spec
Description	Main and subfeed lug block, 2-pole 150 A, 2 spaces, #8-2/0 (75 C only)	**A**	S21 pp. V12-T5-14..T5-16; oem_spec
	Eaton Field Installation Kits and Parts,Clamshell pack,Main and sub-feed lug blocks,150 A,Two-pole,#8-2/0 AWG Cu/Al (Eaton web product description)	**A**	S251 skuPage.BRSF150 (General/Product specifications); oem_spec
Poles	Two-pole	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	Clamshell pack	**A**	same as above
Wire range	#8-2/0 AWG Cu/Al	**A**	same as above
Status	listed October 2016	**A**	S21 oem_spec
Listing / approvals	UL Listed	**A**	S251 skuPage.BRSF150 (General/Product specifications); oem_spec
Installation requirements	(2) 1 in spaces needed, clamshell pack (Eaton web 'Catalog Notes')	**A**	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 4 in, height 2.25 in, width 3.5 in, weight 0.51 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00457	**NL300**	Type BR loadcenter add-on neutral/ground lug (NL300)	#300 kcmil max wire size **A**	listed October 2016

EDH-EAT-00457	NL300	Eaton	lug	LISTED OCTOBER 2016

Type BR loadcenter add-on neutral/ground lug (NL300)

OEM part number	NL300	**A**	S21, S251 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 782113099170	**A**	S251 alias; skuPage.NL300 (General/Product specifications); oem_spec
Description	Add-on neutral/ground lug, 300 kcmil maximum	**A**	S21 pp. V12-T5-14..T5-16; oem_spec
	Eaton CH 3/4-inch Loadcenter and Breaker Accessories - Neutral Lug,Neutral lug,225 A,CH,0.75 in,#300 kcmil max wire size	**A**	S251 skuPage.NL300 (General/Product specifications); oem_spec
Breaker compatibility	#300 kcmil max wire size (Eaton web 'Used with' attribute)	**A**	same as above
Current rating	225 A; Bus material; Aluminum	**A**	same as above
Status	listed October 2016	**A**	S21 oem_spec
	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.NL300 (General/Product specifications); oem_spec
Listing / approvals	UL 489	**A**	S251 skuPage.NL300 (General/Product specifications); oem_spec
Installation requirements	Add-on (Eaton web 'Catalog Notes')	**A**	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 8 in, height 0.1 in, width 5 in, weight 0.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00456	**BINA**	Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)	Type CH loadcenters **A**	listed October 2016

EDH-EAT-00456	BINA	Eaton	neutral-assembly	LISTED OCTOBER 2016

Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)

OEM part number	BINA	**A**	S21, S251 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 782113099439	**A**	S251 alias; skuPage.BINA (General/Product specifications); oem_spec
Description	Isolated neutral assembly (computer circuits)	**A**	S21 pp. V12-T5-14..T5-16; oem_spec
	Eaton CH 3/4-inch Loadcenter Field Installation and Parts - Isolated Neutral Assembly,Isolated neutral assembly,CH,0.75 in,Type CH loadcenters	**A**	S251 skuPage.BINA (General/Product specifications); oem_spec
Breaker compatibility	Type CH loadcenters (Eaton web 'Used with' attribute)	**A**	same as above
Kit contents	Used with CH style 3/4 in Loadcenters (Eaton web 'Special features' attribute)	**A**	same as above
Status	listed October 2016	**A**	S21 oem_spec
	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.BINA (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.BINA (General/Product specifications); oem_spec
Installation requirements	Computer circuits (Eaton web 'Catalog Notes')	**A**	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 8 in, height 1.5 in, width 5 in, weight 0.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00454	**BRFP**	Type BR loadcenter filler plate (BRFP)	—	listed October 2016
EDH-EAT-00455	**BWFP**	Type BR loadcenter filler plate for bw main circuit breaker space (with hardware) (BWFP)	—	listed October 2016

EDH-EAT-00454	BRFP	Eaton	filler-plate	LISTED OCTOBER 2016

Type BR loadcenter filler plate (BRFP)

OEM part number	BRFP	A	S21, S251 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676461603	A	S251 alias; skuPage.BRFP (General/Product specifications); oem_spec
Description	Filler plate, 1.00 in circuit breaker space; ordering quantity 25	A	S21 pp. V12-T5-14..T5-16; oem_spec
	Eaton BR Loadcenter and Circuit Breaker Filler Plate,1 in circuit breaker space filler plate, BR,1 in, Used with WMB Style Meter Breakers	A	S251 skuPage.BRFP (General/Product specifications); oem_spec
Kit contents	Used with WMB Style Meter Breakers (Eaton web 'Special features' attribute)	A	same as above
Status	listed October 2016	A	S21 oem_spec
	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.BRFP (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.BRFP (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.5 in, height 0.25 in, width 1.1 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00455	BWFP	Eaton	filler-plate	LISTED OCTOBER 2016

Type BR loadcenter filler plate for bw main circuit breaker space (with hardware) (BWFP)

OEM part number	BWFP	A	S21 pp. V12-T5-14..T5-16; oem_spec
Description	Filler plate for BW main circuit breaker space (with hardware)	A	same as above
Status	listed October 2016	A	S21 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00458	**BHT**	Type BR loadcenter handle tie bar joining two adjacent single-pole type br breakers (metal cylinder pin type); qty 10 (BHT)	—	listed October 2016

EDH-EAT-00458	BHT	Eaton	handle-lock	LISTED OCTOBER 2016

Type BR loadcenter handle tie bar joining two adjacent single-pole type br breakers (metal cylinder pin type); qty 10 (BHT)

OEM part number	BHT	A	S21, S251 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676375207	A	S251 alias; skuPage.BHT (General/Product specifications); oem_spec
Description	Handle tie bar joining two adjacent single-pole Type BR breakers (metal cylinder pin type); qty 10	A	S21 pp. V12-T5-14..T5-16; oem_spec
	Eaton Handle Tie Bar for Type BR Circuit Breakers,Handle lock/tie,BR,1 in,Quantity: 10,BR Loadcenter	A	S251 skuPage.BHT (General/Product specifications); oem_spec
Kit contents	Suitable for BR loadcenter (Eaton web 'Special features' attribute)	A	same as above
Status	listed October 2016	A	S21 oem_spec
	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.BHT (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.BHT (General/Product specifications); oem_spec
Installation requirements	Order quantity is 10 (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 1 in, width 1 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00459	**BRLW**	Type BR loadcenter padlockable handle lockoff for 1-(BRLW)	For single-,two-three-pole BR and BD circuit breakers A	listed October 2016
EDH-EAT-00460	**BRLW1**	Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mounted (BRLW1)	—	listed October 2016

EDH-EAT-00459	BRLW	Eaton	padlock-attachment	LISTED OCTOBER 2016

Type BR loadcenter padlockable handle lockoff for 1- (BRLW)

OEM part number	BRLW	A	S21 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676000499	A	S251 alias; skuPage.BRLW (General/Product specifications); oem_spec
Description	Padlockable handle lockoff for 1-, 2- or 3-pole Type BR (escutcheon mounted); qty 10	A	S21 pp. V12-T5-14..T5-16; oem_spec
	Eaton Handle Lockoff,Handle lockoff for type BR circuit breakers and single-pole of type BD duplex or one independent outside pole of type BQ/BQC quadplex circuit breakers,For single-,two-three-pole BR and BD circuit breakers (Eaton web product description)	A	S251 skuPage.BRLW (General/Product specifications); oem_spec
Breaker compatibility	For single-,two-three-pole BR and BD circuit breakers (Eaton web 'Used with' attribute)	A	same as above
Status	listed October 2016	A	S21 oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.BRLW (General/Product specifications); oem_spec
Installation requirements	Lock in on or off position (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 2 in, height 0.5 in, width 0.5 in, weight 0.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00460	BRLW1	Eaton	padlock-attachment	LISTED OCTOBER 2016

Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mounted (BRLW1)

OEM part number	BRLW1	A	S21 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676376228	A	S251 alias; skuPage.BRLW1 (General/Product specifications); oem_spec
Description	Padlockable handle lockoff for single-pole Type BR (handle mounted, set screw); qty 10	A	S21 pp. V12-T5-14..T5-16; oem_spec
	Eaton Handle Lockoff,Suitable for TT120 loadcenters,Handle lockoff for single-pole type BR circuit breaker,Quantity: 10 (Eaton web product description)	A	S251 skuPage.BRLW1 (General/Product specifications); oem_spec
Kit contents	Suitable for TT120 loadcenters	A	same as above
Status	listed October 2016	A	S21 oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.BRLW1 (General/Product specifications); oem_spec
Installation requirements	Locks in off position (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 7.25 in, height 0.5 in, width 5 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

3.2 CH-BR-RETRO — Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)

FAM-EAT-027 · other · aka Lincoln Flex Center retrofit, RA/RB/RC/RD/RE/RAA retrofit kits, Retro Size A-E · markings: Cutler-Hammer, Eaton

Eaton/Cutler-Hammer standardized retrofit kits for re-using an existing (any-manufacturer, e.g. FPE or Zinsco) flush panel box: a cover assembly (field-drilled picture frame + trim) and a field-adjustable interior assembly with riser accommodating 4-6 in box depth (3.5-5.25 in for size AA). Kits are selected by existing box height into Retro Size groups A (21-30 in, cover 33x24), B (29-36, 40x24), C (34-41, 43x24), D (37-45, 47x24), E (45-54, 56x24), plus AA for boxes 14.5-20.5 in high (covers 19x13 or 21x16). Interiors are 'UL recognized under UL67'; whether the installed assembly in a foreign box is listed is debated (forum), so AHJ/field evaluation may be required. Hosted by InspectAPedia as an FPE Stab-Lok replacement option.

Attribute	Value	Cl.	Sources
Status	Unknown whether still offered as standard kits; Eaton continues custom retrofit interiors via Flex Centers	D	S230, S216 inference
Era of manufacture	Introduced as 'new' offering in undated Eaton Electrical guide (Eaton Electrical brand used c.2003-2008)	D	S230 inference
Voltage rating	240 V max class (loadcenter-based plug-on CH 3/4 in and BR 1 in breakers); 120/240 1-ph and 240 V 3-ph	A	S230 pp. 1, 3-4; oem_spec
Main ampacity	MLO 100-225 A; main breaker 60-225 A (XXX = amp rating); AIC options 10K/22K/25K/35K/100K	A	S230 pp. 6-10, charts 1-11; oem_spec
Branch breakers accepted	Type CH (3/4 in per pole, CH110-CH3100 etc.) or Type BR (1 in per pole, BR/BRH/BJ/BD/BQ/GFCB/GFEP)	A	S230 pp. 3-4; oem_spec
Box range	Standard kits A-E: box widths 14.5-22 in, depths 4 in (BR) / 4.25 in (CH) to 6 in, heights 21-45 in (54 in for E)	A	S230 p. 5; oem_spec
Bus	CH 3-ph and SFL: copper bus with tin-plated copper stabs; CH 1-ph: one-piece copper bus; BR: tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Listing debate	Components listed but field assembly into existing box may need field evaluation per AHJ	D	S231 inference

Key documents: S216 Retrofit kit for Federal Pacific (forum thread); S230 Eaton Electrical Launches New Options for Upgrading Existing Panelboards - Retrofit Kits (; S231 Eaton's retrofit panel assemblies are not UL listed (forum thread) and related threads

Interior

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01232	**RACH24L125I**	Eaton CH retrofit stocking kit RACH24L125I	—	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-01233	**RDCH42B200I**	Eaton CH retrofit stocking kit RDCH42B200I	—	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-01236	**RTBR10B100Q**	Eaton BR retrofit stocking kit RTBR10B100Q	—	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-01242	**RTBR12L125Q**	Eaton BR retrofit stocking kit RTBR12L125Q	—	unknown
EDH-EAT-01235	**RTBR12L125R**	Eaton BR retrofit stocking kit RTBR12L125R	—	discontinued (Eaton product page shows "Discontinued" banner

EDH-EAT-01232 **RACH24L125I** Eaton interior **DISCONTINUED (EATON PR**

Eaton CH retrofit stocking kit RACH24L125I

OEM part number	RACH24L125I	A	S251, S632 oem_spec
Alternate / superseded numbers	UPC 786685211060	A	S251 alias; skuPage.RACH24L125I (General/Product specifications); oem_spec
Description	Eaton CH 3/4-inch Loadcenter Retrofit Stocking Kit,Main lug only,125 A,size group a,Cover height: 33 in,Cover width: 24 in,NEMA 1,CH,Surface,flush,24 Circuits,Single-phase,0.75 in,#4-2/0 AWG	A	same as above
	Eaton CH 3/4-inch Loadcenter Retrofit Stocking Kit, main lug only, 125 A, retro size group A, cover height 33 in, cover width 24 in, NEMA 1, CH, surface/flush, 24 circuits, single-phase, #4-2/0 AWG; distributor title 'CH Retrofit Kit Int Only' (distributor data (Eaton catalog text))	C	S632 distributor
Application	Retrofit of existing (any-manufacturer) loadcenter/panel enclosure with new Eaton CH or BR interior ('retrofit stocking kit'); Eaton brochure: kits 'UL 67 Listed', 'Replaces vintage brands that have hard to find, expensive replacement breakers', select by measuring existing enclosure	C	S632, S637 distributor

Current rating	125 A; Main circuit breaker; CH	A	S251 skuPage.RACH24L125I (General/Product specifications); oem_spec
Wire range	#4-2/0 AWG	A	same as above
Dimensions	Package/product 6.00 x 22.00 x 30.00 in; 13.2 lb	C	S632 distributor
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	S251 skuPage.RACH24L125I (General/Product specifications); oem_spec
Identification features	Suffix 'I' appears to denote interior-only version of the RxCH retrofit kits (cf. existing RACH24L125 etc.) - inference from distributor titles 'Int Only'	D	S632 inference
Listing / approvals	UL 67	A	S251 skuPage.RACH24L125I (General/Product specifications); oem_spec
	Standard: UL 67	C	S632 distributor
Installation requirements	Specific cover sizes are available. Be sure to specify the custom cover option and provide exact dimensions required. (Eaton web 'Catalog Notes')	A	S251 skuPage.RACH24L125I (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6 in, height 30 in, width 22 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: CH-BR-RETRO		
Not yet documented	bus material, OEM instruction document, Kit contents		

EDH-EAT-01233	RDCH42B200I	Eaton	interior	DISCONTINUED (EATON PR

Eaton CH retrofit stocking kit RDCH42B200I

OEM part number	RDCH42B200I	A	S251, S633 oem_spec
Alternate / superseded numbers	UPC 786685211114	A	S251 alias; skuPage.RDCH42B200I (General/Product specifications); oem_spec
Description	Eaton CH 3/4-inch Loadcenter Retrofit Stocking Kit,Main circuit breaker,200 A,Retro size group d,Cover height: 47 in,Cover width: 24 in,NEMA 1,25 kAIC,CH,Surface, flush,42 Circuits,Single-phase,0.75 in,#1 AWG-300 kcmil	A	same as above
	Eaton CH 3/4-inch Loadcenter Retrofit Stocking Kit, main circuit breaker 200 A, retro size group D, cover height 47 in, cover width 24 in, NEMA 1, 25 kAIC, CH, surface/flush, 42 circuits, single-phase, #1 AWG-300 kcmil; distributor title 'CH Retrofit Kit Int Only 1 PH 200A Main BKR 42 CKT' (distributor data (Eaton catalog text))	C	S633 distributor
Application	Retrofit of existing (any-manufacturer) loadcenter/panel enclosure with new Eaton CH or BR interior ('retrofit stocking kit'); Eaton brochure: kits 'UL 67 Listed', 'Replaces vintage brands that have hard to find, expensive replacement breakers', select by measuring existing enclosure	C	S633, S637 distributor
Current rating	200 A; Main circuit breaker; CH	A	S251 skuPage.RDCH42B200I (General/Product specifications); oem_spec
Wire range	#1 AWG-300 kcmil	A	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	same as above
Identification features	Suffix 'I' appears to denote interior-only version of the RxCH retrofit kits (cf. existing RACH24L125 etc.) - inference from distributor titles 'Int Only'	D	S633 inference
Listing / approvals	UL 67	A	S251 skuPage.RDCH42B200I (General/Product specifications); oem_spec
Installation requirements	Specific cover sizes are available. Be sure to specify the custom cover option and provide exact dimensions required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 6 in, height 45 in, width 22 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: CH-BR-RETRO		
Not yet documented	bus material, OEM instruction document, Kit contents		

EDH-EAT-01236	RTBR10B100Q	Eaton	interior	DISCONTINUED (EATON PR

Eaton BR retrofit stocking kit RTBR10B100Q

OEM part number	RTBR10B100Q	A	S251, S633 oem_spec
Alternate / superseded numbers	UPC 786685291925	A	S251 alias; skuPage.RTBR10B100Q (General/Product specifications); oem_spec
Description	Eaton BR Retrofit Kit Interior Only - Main Circuit Breaker,Main circuit breaker,100 A,10 Circuits,20 Spaces,Single phase	A	same as above
	Eaton BR retrofit kit interior only, main circuit breaker 100 A, 10 circuits / 20 spaces, single-phase (distributor data (Eaton catalog text))	C	S633 distributor
Application	Retrofit of existing (any-manufacturer) loadcenter/panel enclosure with new Eaton CH or BR interior ('retrofit stocking kit'); Eaton brochure: kits 'UL 67 Listed', 'Replaces vintage brands that have hard to find, expensive replacement breakers', select by measuring existing enclosure	C	S633, S637 distributor
Current rating	100 A	A	S251 skuPage.RTBR10B100Q (General/Product specifications); oem_spec
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	same as above
Listing / approvals	Contact Manufacturer	A	S251 skuPage.RTBR10B100Q (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 1 in, width 1 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: CH-BR-RETRO		
Not yet documented	bus material, OEM instruction document, Kit contents		

EDH-EAT-01242	RTBR12L125Q	Eaton	interior	STATUS UNKNOWN

Eaton BR retrofit stocking kit RTBR12L125Q

OEM part number	RTBR12L125Q	C	S633 distributor
Description	Eaton BR retrofit kit interior only, main lug only, 125 A, 12 circuits / 24 spaces, single-phase (distributor data (Eaton catalog text))	C	same as above
Application	Retrofit of existing (any-manufacturer) loadcenter/panel enclosure with new Eaton CH or BR interior ('retrofit stocking kit'); Eaton brochure: kits 'UL 67 Listed', 'Replaces vintage brands that have hard to find, expensive replacement breakers', select by measuring existing enclosure	C	S633, S637 distributor
Cross-links	Families: CH-BR-RETRO		
Not yet documented	bus material, OEM instruction document, Kit contents		

EDH-EAT-01235	RTBR12L125R	Eaton	interior	DISCONTINUED (EATON PR

Eaton BR retrofit stocking kit RTBR12L125R

OEM part number	RTBR12L125R	A	S251, S633 oem_spec
Alternate / superseded numbers	UPC 786685291918	A	S251 alias; skuPage.RTBR12L125R (General/Product specifications); oem_spec
Description	Eaton BR Retrofit Kit Interior Only - Main Lug Only,Main lug only,125 A,BR,12 Circuits,24 Spaces,Single-phase	A	same as above
	Eaton BR retrofit kit interior only, main lug only, 125 A, 12 circuits / 24 spaces, single-phase (Crescent: discontinued) (distributor data (Eaton catalog text))	C	S633 distributor
Application	Retrofit of existing (any-manufacturer) loadcenter/panel enclosure with new Eaton CH or BR interior ('retrofit stocking kit'); Eaton brochure: kits 'UL 67 Listed', 'Replaces vintage brands that have hard to find, expensive replacement breakers', select by measuring existing enclosure	C	S633, S637 distributor
Current rating	125 A	A	S251 skuPage.RTBR12L125R (General/Product specifications); oem_spec
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	same as above
	discontinued (distributor)	C	S633 distributor
Listing / approvals	Contact Manufacturer	A	S251 skuPage.RTBR12L125R (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 1 in, width 1 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: CH-BR-RETRO		
Not yet documented	bus material, OEM instruction document, Kit contents		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01234	**RDCHFRAME**	Eaton CH retrofit stocking kit RDCHFRAME	—	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-01234	RDCHFRAME	Eaton	trim	ACTIVE EATON PRODUCT P

Eaton CH retrofit stocking kit RDCHFRAME

OEM part number	RDCHFRAME	**A**	S251, S633 oem_spec
Alternate / superseded numbers	UPC 786685211169	**A**	S251 alias; skuPage.RDCHFRAME (General/Product specifications); oem_spec
Description	Eaton CH 3/4-inch Loadcenter Retrofit Stocking Kit,Frame,Retro size group d,CH,0.75 in	**A**	same as above
	CH Retrofit Kit Collar Only for RDCH style interior; retro size group D; 6 x 22 x 45 in; UL 67 (distributor data (Eaton catalog text))	**C**	S633 distributor
Application	Retrofit of existing (any-manufacturer) loadcenter/panel enclosure with new Eaton CH or BR interior ('retrofit stocking kit'); Eaton brochure: kits 'UL 67 Listed', 'Replaces vintage brands that have hard to find, expensive replacement breakers', select by measuring existing enclosure	**C**	S633, S637 distributor
Current rating	225 A; Bus material; Aluminum; Main circuit breaker; CH	**A**	S251 skuPage.RDCHFRAME (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	same as above
Listing / approvals	UL 67	**A**	S251 skuPage.RDCHFRAME (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6 in, height 45 in, width 22 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: CH-BR-RETRO		
Not yet documented	bus material, OEM instruction document, Kit contents		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00764	**RAABR10BXXX**	Cutler-Hammer compact BR retrofit kit RAABR10BXXX	Cutler-Hammer Type BR **A**	unknown
EDH-EAT-00765	**RAABR10BXXXA**	Cutler-Hammer compact BR retrofit kit RAABR10BXXXA	Cutler-Hammer Type BR **A**	unknown
EDH-EAT-00762	**RAABR12L125**	Cutler-Hammer compact BR retrofit kit RAABR12L125	Cutler-Hammer Type BR **A**	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-00763	**RAABR12L125A**	Cutler-Hammer compact BR retrofit kit RAABR12L125A	Cutler-Hammer Type BR **A**	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-00748	**RABR12B3XXX**	Cutler-Hammer BR retrofit kit RABR12B3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00749	**RABR12H3XXX**	Cutler-Hammer BR retrofit kit RABR12H3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00756	**RABR12L3125**	Cutler-Hammer BR retrofit kit RABR12L3125	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00737	**RABR20BXXX**	Cutler-Hammer BR retrofit kit RABR20BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00738	**RABR20HXXX**	Cutler-Hammer BR retrofit kit RABR20HXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00744	**RABR20L125**	Cutler-Hammer BR retrofit kit RABR20L125	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-00722	**RACH18B3XXX**	Cutler-Hammer CH retrofit kit RACH18B3XXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00706	**RACH22BXXX**	Cutler-Hammer CH retrofit kit RACH22BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00712	**RACH24L125**	Cutler-Hammer CH retrofit kit RACH24L125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00725	**RACH24L3125**	Cutler-Hammer CH retrofit kit RACH24L3125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00726	**RACH30L3125**	Cutler-Hammer CH retrofit kit RACH30L3125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00727	**RACH30L3225**	Cutler-Hammer CH retrofit kit RACH30L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00741	**RBBR20BXXX**	Cutler-Hammer BR retrofit kit RBBR20BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00758	**RBBR24L3150**	Cutler-Hammer BR retrofit kit RBBR24L3150	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00739	**RBBR30BCXXX**	Cutler-Hammer BR retrofit kit RBBR30BCXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00750	**RBBR30BXXX**	Cutler-Hammer BR retrofit kit RBBR30BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00751	**RBBR30H3XXX**	Cutler-Hammer BR retrofit kit RBBR30H3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00740	**RBBR30HCXXX**	Cutler-Hammer BR retrofit kit RBBR30HCXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00745	**RBBR30L200**	Cutler-Hammer BR retrofit kit RBBR30L200	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00757	**RBBR30L3100**	Cutler-Hammer BR retrofit kit RBBR30L3100	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00708	**RBCH24BXXX**	Cutler-Hammer CH retrofit kit RBCH24BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00718	**RBCH24D225**	Cutler-Hammer CH retrofit kit RBCH24D225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00733	**RBCH24D3225**	Cutler-Hammer CH retrofit kit RBCH24D3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00707	**RBCH30BXXX**	Cutler-Hammer CH retrofit kit RBCH30BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00734	**RBCH30D3225**	Cutler-Hammer CH retrofit kit RBCH30D3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00728	**RBCH30L3225**	Cutler-Hammer CH retrofit kit RBCH30L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00719	**RBCH32D225**	Cutler-Hammer CH retrofit kit RBCH32D225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00714	**RBCH32L225**	Cutler-Hammer CH retrofit kit RBCH32L225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00713	**RBCH42L125**	Cutler-Hammer CH retrofit kit RBCH42L125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00715	**RBCH42L225**	Cutler-Hammer CH retrofit kit RBCH42L225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00729	**RBCH42L3125**	Cutler-Hammer CH retrofit kit RBCH42L3125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00730	**RBCH42L3225**	Cutler-Hammer CH retrofit kit RBCH42L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00742	**RCBR30BXXX**	Cutler-Hammer BR retrofit kit RCBR30BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00759	**RCBR30L3200**	Cutler-Hammer BR retrofit kit RCBR30L3200	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00746	**RCBR40L200**	Cutler-Hammer BR retrofit kit RCBR40L200	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00735	**RCCH30D3225**	Cutler-Hammer CH retrofit kit RCCH30D3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00709	**RCCH32BXXX**	Cutler-Hammer CH retrofit kit RCCH32BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00720	**RCCH32D225**	Cutler-Hammer CH retrofit kit RCCH32D225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00716	**RCCH42L225**	Cutler-Hammer CH retrofit kit RCCH42L225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00731	**RCCH42L3225**	Cutler-Hammer CH retrofit kit RCCH42L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00752	**RDBR30B3XXX**	Cutler-Hammer BR retrofit kit RDBR30B3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00753	**RDBR30H3XXX**	Cutler-Hammer BR retrofit kit RDBR30H3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00743	**RDBR40BXXX**	Cutler-Hammer BR retrofit kit RDBR40BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00747	**RDBR42L225**	Cutler-Hammer BR retrofit kit RDBR42L225	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00760	**RDBR42L3225**	Cutler-Hammer BR retrofit kit RDBR42L3225	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00723	**RDCH42B3XXX**	Cutler-Hammer CH retrofit kit RDCH42B3XXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00710	**RDCH42BXXX**	Cutler-Hammer CH retrofit kit RDCH42BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00721	**RDCH42D225**	Cutler-Hammer CH retrofit kit RDCH42D225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00736	**RDCH42D3225**	Cutler-Hammer CH retrofit kit RDCH42D3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00724	**RDCH42H3XXX**	Cutler-Hammer CH retrofit kit RDCH42H3XXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00711	**RDCH42HXXX**	Cutler-Hammer CH retrofit kit RDCH42HXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00717	**RDCH42L225**	Cutler-Hammer CH retrofit kit RDCH42L225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00732	**RDCH42L3225**	Cutler-Hammer CH retrofit kit RDCH42L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00754	**REBR42B3XXX**	Cutler-Hammer BR retrofit kit REBR42B3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00755	**REBR42H3XXX**	Cutler-Hammer BR retrofit kit REBR42H3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00761	**REBR42L3225**	Cutler-Hammer BR retrofit kit REBR42L3225	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown

EDH-EAT-00764 **RAABR10BXXX** Cutler-Hammer conversion-kit **UNKNOWN**

Cutler-Hammer compact BR retrofit kit RAABR10BXXX

OEM part number	RAABR10BXXX	**A**	S230 p. 10, Selection Chart 11; oem_spec
Description	Compact Type BR retrofit kit (Retro Size AA), main breaker, 10 spaces / 20 circuits, #6-1/0 wire, cover 19 x 13 in	**A**	same as above
Application	main breaker	**A**	same as above
Breaker compatibility	Cutler-Hammer Type BR	**A**	same as above
Current rating	60-125 A	**A**	same as above
Kit contents	Picture frame + trim cover assembly; interior with field-adjustable riser (3.5-5.25 in depth)	**A**	same as above
Dimensions	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 19 x 13 in; trim protrudes 1/2 in from drywall	**A**	same as above
Status	unknown	**D**	S230 inference
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Mounting-hole pattern, Material, Torque values		

EDH-EAT-00765 **RAABR10BXXXA** Cutler-Hammer conversion-kit **UNKNOWN**

Cutler-Hammer compact BR retrofit kit RAABR10BXXXA

OEM part number	RAABR10BXXXA	**A**	S230 p. 10, Selection Chart 11; oem_spec
Description	Compact Type BR retrofit kit (Retro Size AA), main breaker, 10 spaces / 20 circuits, #6-1/0 wire, cover 21 x 16 in	**A**	same as above
Application	main breaker	**A**	same as above
Breaker compatibility	Cutler-Hammer Type BR	**A**	same as above
Current rating	60-125 A	**A**	same as above
Kit contents	Picture frame + trim cover assembly; interior with field-adjustable riser (3.5-5.25 in depth)	**A**	same as above
Dimensions	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 21 x 16 in; trim protrudes 1/2 in from drywall	**A**	same as above
Status	unknown	**D**	S230 inference
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Mounting-hole pattern, Material, Torque values		

EDH-EAT-00762 **RAABR12L125** Cutler-Hammer conversion-kit **DISCONTINUED (EATON PR**

Cutler-Hammer compact BR retrofit kit RAABR12L125

OEM part number	RAABR12L125	**A**	S230, S251 p. 10, Selection Chart 11; oem_spec

Alternate / superseded numbers	UPC 786685211022	A	S251 alias; skuPage.RAABR12L125 (General/Product specifications); oem_spec
Description	Compact Type BR retrofit kit (Retro Size AA), main lugs, 12 spaces / 24 circuits, #6-1/0 wire, cover 19 x 13 in	A	S230 p. 10, Selection Chart 11; oem_spec
	Eaton BR 1-inch Loadcenter Retrofit Stocking Kit - Main Lug Only,Main lug only,125 A,Retro size group aa,NEMA 1,BR,12 Circuits,24 Spaces,Single-phase,1 in	A	S251 skuPage.RAABR12L125 (General/Product specifications); oem_spec
Application	main lugs	A	S230 p. 10, Selection Chart 11; oem_spec
Breaker compatibility	Cutler-Hammer Type BR	A	same as above
Current rating	125 A	A	same as above
	125 A; Main circuit breaker; BR	A	S251 skuPage.RAABR12L125 (General/Product specifications); oem_spec
Kit contents	Picture frame + trim cover assembly; interior with field-adjustable riser (3.5-5.25 in depth)	A	S230 p. 10, Selection Chart 11; oem_spec
Dimensions	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 19 x 13 in; trim protrudes 1/2 in from drywall	A	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	S251 skuPage.RAABR12L125 (General/Product specifications); oem_spec
	unknown	D	S230 inference
Listing / approvals	UL 67	A	S251 skuPage.RAABR12L125 (General/Product specifications); oem_spec
Installation requirements	Specific cover sizes are available. Be sure to specify the custom cover option and provide exact dimensions required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 5.25 in, height 21 in, width 12.5 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Mounting-hole pattern, Material, Torque values		

EDH-EAT-00763	RAABR12L125A	Cutler-Hammer	conversion-kit	DISCONTINUED (EATON PR

Cutler-Hammer compact BR retrofit kit RAABR12L125A

OEM part number	RAABR12L125A	A	S230, S251 p. 10, Selection Chart 11; oem_spec
Alternate / superseded numbers	UPC 786685211046	A	S251 alias; skuPage.RAABR12L125A (General/Product specifications); oem_spec
Description	Compact Type BR retrofit kit (Retro Size AA), main lugs, 12 spaces / 24 circuits, #6-1/0 wire, cover 21 x 16 in	A	S230 p. 10, Selection Chart 11; oem_spec
	Eaton BR 1-inch Loadcenter Retrofit Stocking Kit - Main Lug Only,Main lug only,125 A,Retro size group a,NEMA 1,BR,24 Circuits,12 Spaces,Single-phase,1 in	A	S251 skuPage.RAABR12L125A (General/Product specifications); oem_spec
Application	main lugs	A	S230 p. 10, Selection Chart 11; oem_spec
Breaker compatibility	Cutler-Hammer Type BR	A	same as above
Current rating	125 A	A	same as above
	125 A; Main circuit breaker; BR	A	S251 skuPage.RAABR12L125A (General/Product specifications); oem_spec
Kit contents	Picture frame + trim cover assembly; interior with field-adjustable riser (3.5-5.25 in depth)	A	S230 p. 10, Selection Chart 11; oem_spec

Dimensions	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 21 x 16 in; trim protrudes 1/2 in from drywall	A	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	S251 skuPage.RAABR12L125A (General/Product specifications); oem_spec
	unknown	D	S230 inference
Listing / approvals	UL 67	A	S251 skuPage.RAABR12L125A (General/Product specifications); oem_spec
Installation requirements	Specific cover sizes are available. Be sure to specify the custom cover option and provide exact dimensions required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 6 in, height 26 in, width 17 in, weight 15.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Mounting-hole pattern, Material, Torque values		

EDH-EAT-00748 **RABR12B3XXX** Cutler-Hammer conversion-kit **UNKNOWN**

Cutler-Hammer BR retrofit kit RABR12B3XXX

OEM part number	RABR12B3XXX (XXX = main breaker amp rating)	A	S230 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 12 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 9; oem_spec
Current rating	60-100 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-1/0	A	S230 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00749	RABR12H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR12H3XXX

OEM part number	RABR12H3XXX (XXX = main breaker amp rating)	A	S230 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 12 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 9; oem_spec
Current rating	60-100 A, 22K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-1/0	A	S230 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00756	RABR12L3125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR12L3125

OEM part number	RABR12L3125	A	S230 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 12 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 10; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #8-2/0	A	S230 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00737	RABR20BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR20BXXX

OEM part number	RABR20BXXX (XXX = main breaker amp rating)	A	S230 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 20 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 8, Selection Chart 7; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-2/0	A	S230 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00738	RABR20HXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR20HXXX

OEM part number	RABR20HXXX (XXX = main breaker amp rating)	A	S230 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 20 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 8, Selection Chart 7; oem_spec
Current rating	60-125 A, 22K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-2/0	A	S230 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00744	RABR20L125	Cutler-Hammer	conversion-kit	DISCONTINUED (EATON PR

Cutler-Hammer BR retrofit kit RABR20L125

OEM part number	RABR20L125	A	S230, S251 p. 8, Selection Chart 8; oem_spec
Alternate / superseded numbers	UPC 786685242545	A	S251 alias; skuPage.RABR20L125 (General/Product specifications); oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main lugs, 20 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	S230 p. 8, Selection Chart 8; oem_spec
	Eaton BR 1-inch Loadcenter Retrofit Stocking Kit - Main Lug Only,Main lug only,125 A,Retro size group a,Cover height: 33 in,Cover width: 24 in,NEMA 1,10 kAIC,BR,Surface, flush,24 Circuits,Single-phase,1 in,#4-2/0 AWG	A	S251 skuPage.RABR20L125 (General/Product specifications); oem_spec
Application	main lugs	A	S230 p. 8, Selection Chart 8; oem_spec
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 8, Selection Chart 8; oem_spec
Current rating	125 A	A	same as above
	125 A; Main circuit breaker; BR	A	S251 skuPage.RABR20L125 (General/Product specifications); oem_spec
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Wire range	#4-2/0 AWG	A	S251 skuPage.RABR20L125 (General/Product specifications); oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 8, Selection Chart 8; p. 2,5; oem_spec
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	S251 skuPage.RABR20L125 (General/Product specifications); oem_spec
	unknown	D	S230 inference
Identification features	Main/feed lug wire range #14-2/0	A	S230 p. 8, Selection Chart 8; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.RABR20L125 (General/Product specifications); oem_spec
Installation requirements	Specific cover sizes are available. Be sure to specify the custom cover option and provide exact dimensions required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 6 in, height 30 in, width 22 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00722	RACH18B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH18B3XXX

OEM part number	RACH18B3XXX (XXX = main breaker amp rating)	A	S230 p. 7, Selection Chart 4; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main breaker, 18 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 4; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 4; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #2-1/0	A	S230 p. 7, Selection Chart 4; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00706	RACH22BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH22BXXX

OEM part number	RACH22BXXX (XXX = main breaker amp rating)	A	S230 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 22 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 1; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #2-1/0	A	S230 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00712	RACH24L125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH24L125

OEM part number	RACH24L125	A	S230 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 24 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 2; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-2/0	A	S230 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00725	RACH24L3125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH24L3125

OEM part number	RACH24L3125	A	S230 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 24 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 5; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #6-2/0	A	S230 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00726	RACH30L3125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH30L3125

OEM part number	RACH30L3125	A	S230 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 5; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 22-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-#1	A	S230 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00727	RACH30L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH30L3225

OEM part number	RACH30L3225	A	S230 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 5; oem_spec
Current rating	150-225 (chart rows 150 A 22.5-30 in #4-1/0 and 225 A 24.5-30 in #4-4/0 share this number) A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 22.5-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-4/0	A	S230 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00741	RBBR20BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR20BXXX

OEM part number	RBBR20BXXX (XXX = main breaker amp rating)	A	S230 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 20 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 8, Selection Chart 7; oem_spec
Current rating	100-200 A, 25K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-30.5 in (#2-250) / 31-36 in (#2-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S230 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00758	RBBR24L3150	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR24L3150

OEM part number	RBBR24L3150	A	S230 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 24 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 10; oem_spec
Current rating	150 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-4/0	A	S230 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00739	RBBR30BCXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30BCXXX

OEM part number	RBBR30BCXXX (XXX = main breaker amp rating)	A	S230 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 8, Selection Chart 7; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-1/0	A	S230 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00750	RBBR30BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30BXXX

OEM part number	RBBR30BXXX (XXX = main breaker amp rating)	A	S230 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 9; oem_spec
Current rating	60-100 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-1/0	A	S230 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		
Open question	*Chart 9 prints 'RBBR30BXXX' for the 3-phase 10K kit, lacking the '3' phase marker used by the other 3-phase numbers (e.g., RBBR30H3XXX) - possibly a typo for RBBR30B3XXX.*		

EDH-EAT-00751	RBBR30H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30H3XXX

OEM part number	RBBR30H3XXX (XXX = main breaker amp rating)	A	S230 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 9; oem_spec
Current rating	60-100 A, 22K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-1/0	A	S230 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00740	RBBR30HCXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30HCXXX

OEM part number	RBBR30HCXXX (XXX = main breaker amp rating)	A	S230 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 8, Selection Chart 7; oem_spec
Current rating	60-125 A, 22K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-1/0	A	S230 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00745	RBBR30L200	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30L200

OEM part number	RBBR30L200	A	S230 p. 8, Selection Chart 8; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 8, Selection Chart 8; oem_spec
Current rating	200 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-31.5 in (#1-250) / 32-36 in (#1-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 8, Selection Chart 8; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S230 p. 8, Selection Chart 8; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00757	RBBR30L3100	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30L3100

OEM part number	RBBR30L3100	A	S230 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 10; oem_spec
Current rating	100 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #8-2/0	A	S230 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00708	RBCH24BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH24BXXX

OEM part number	RBCH24BXXX (XXX = main breaker amp rating)	A	S230 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 24 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 1; oem_spec
Current rating	100-200 A, 35K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-30 in (#2-250 kcmil) / 30.5-36 in (#2-300 kcmil); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S230 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00718	RBCH24D225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH24D225

OEM part number	RBCH24D225	A	S230 p. 6, Selection Chart 3; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, sub-feed lugs, 24 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 3; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 3; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S230 p. 6, Selection Chart 3; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00733	RBCH24D3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH24D3225

OEM part number	RBCH24D3225	A	S230 p. 7, Selection Chart 6; oem_spec
Description	Type CH retrofit kit, 3-ph 240, sub-feed lugs, 24 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 6; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 6; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S230 p. 7, Selection Chart 6; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00707	RBCH30BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH30BXXX

OEM part number	RBCH30BXXX (XXX = main breaker amp rating)	A	S230 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 1; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #2-1/0	A	S230 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00734	RBCH30D3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH30D3225

OEM part number	RBCH30D3225	A	S230 p. 7, Selection Chart 6; oem_spec
Description	Type CH retrofit kit, 3-ph 240, sub-feed lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 6; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 31-33.5 in / 34-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 6; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S230 p. 7, Selection Chart 6; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00728	RBCH30L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH30L3225

OEM part number	RBCH30L3225	A	S230 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 5; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S230 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00719	RBCH32D225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH32D225

OEM part number	RBCH32D225	A	S230 p. 6, Selection Chart 3; oem_spec

Description	Type CH retrofit kit, 1-ph 120/240, sub-feed lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 3; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 31-33.5 in (#6-250) / 34-36 in (#6-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 3; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S230 p. 6, Selection Chart 3; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		
Open question	*Chart lists 30 circuits but part number implies 32.*		

EDH-EAT-00714 **RBCH32L225** Cutler-Hammer conversion-kit **UNKNOWN**

Cutler-Hammer CH retrofit kit RBCH32L225

OEM part number	RBCH32L225	A	S230 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 32 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 2; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S230 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00713	RBCH42L125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH42L125

OEM part number	RBCH42L125	A	S230 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 2; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 25-26 in (#4-#1) / 26.5-30 in (#4-1/0); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-1/0	A	S230 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00715	RBCH42L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH42L225

OEM part number	RBCH42L225	A	S230 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 2; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 28.5-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-4/0	A	S230 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00729	RBCH42L3125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH42L3125

OEM part number	RBCH42L3125	A	S230 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 5; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 25-28 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-#1	A	S230 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00730	RBCH42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH42L3225

OEM part number	RBCH42L3225	A	S230 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 5; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 28.5-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-4/0	A	S230 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00742	RCBR30BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RCBR30BXXX

OEM part number	RCBR30BXXX (XXX = main breaker amp rating)	A	S230 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 30 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 8, Selection Chart 7; oem_spec
Current rating	100-200 A, 25K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-35.5 in (#2-250) / 36-41 in (#2-300); retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S230 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00759	RCBR30L3200	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RCBR30L3200

OEM part number	RCBR30L3200	A	S230 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 10; oem_spec
Current rating	200 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-35.5 in (#4-250) / 36-41 in (#4-300); retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S230 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00746	RCBR40L200	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RCBR40L200

OEM part number	RCBR40L200	A	S230 p. 8, Selection Chart 8; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main lugs, 40 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 8, Selection Chart 8; oem_spec
Current rating	200 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-36.5 in / 37-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 8, Selection Chart 8; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S230 p. 8, Selection Chart 8; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00735	RCCH30D3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH30D3225

OEM part number	RCCH30D3225	A	S230 p. 7, Selection Chart 6; oem_spec
Description	Type CH retrofit kit, 3-ph 240, sub-feed lugs, 30 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 6; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 6; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S230 p. 7, Selection Chart 6; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00709	RCCH32BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH32BXXX

OEM part number	RCCH32BXXX (XXX = main breaker amp rating)	A	S230 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 32 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 1; oem_spec
Current rating	100-225 A, 35K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S230 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00720	RCCH32D225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH32D225

OEM part number	RCCH32D225	A	S230 p. 6, Selection Chart 3; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, sub-feed lugs, 32 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 3; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 3; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S230 p. 6, Selection Chart 3; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00716	RCCH42L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH42L225

OEM part number	RCCH42L225	A	S230 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 2; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S230 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00731	RCCH42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH42L3225

OEM part number	RCCH42L3225	A	S230 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 5; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S230 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00752	RDBR30B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR30B3XXX

OEM part number	RDBR30B3XXX (XXX = main breaker amp rating)	A	S230 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 30 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 9; oem_spec
Current rating	100-200 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S230 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00753	RDBR30H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR30H3XXX

OEM part number	RDBR30H3XXX (XXX = main breaker amp rating)	A	S230 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 30 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 9; oem_spec
Current rating	100-200 A, 100K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in (2/0-250) / 39-45 in (2/0-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S230 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00743	RDBR40BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR40BXXX

OEM part number	RDBR40BXXX (XXX = main breaker amp rating)	A	S230 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 40 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 8, Selection Chart 7; oem_spec
Current rating	100-200 A, 25K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in (#2-4/0) / 39-40.5 in (#2-250) / 41-45 in (#2-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S230 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00747	RDBR42L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR42L225

OEM part number	RDBR42L225	A	S230 p. 8, Selection Chart 8; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 8, Selection Chart 8; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in / 39-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 8, Selection Chart 8; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S230 p. 8, Selection Chart 8; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00760	RDBR42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR42L3225

OEM part number	RDBR42L3225	A	S230 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 10; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in / 39-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S230 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00723	RDCH42B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42B3XXX

OEM part number	RDCH42B3XXX (XXX = main breaker amp rating)	A	S230 p. 7, Selection Chart 4; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main breaker, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 4; oem_spec
Current rating	100-225 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 4; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S230 p. 7, Selection Chart 4; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00710	RDCH42BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42BXXX

OEM part number	RDCH42BXXX (XXX = main breaker amp rating)	A	S230 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 1; oem_spec
Current rating	100-225 A, 35K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S230 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00721	RDCH42D225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42D225

OEM part number	RDCH42D225	A	S230 p. 6, Selection Chart 3; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, sub-feed lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 3; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 3; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S230 p. 6, Selection Chart 3; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00736	RDCH42D3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42D3225

OEM part number	RDCH42D3225	A	S230 p. 7, Selection Chart 6; oem_spec
Description	Type CH retrofit kit, 3-ph 240, sub-feed lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 6; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 6; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S230 p. 7, Selection Chart 6; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00724	RDCH42H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42H3XXX

OEM part number	RDCH42H3XXX (XXX = main breaker amp rating)	A	S230 p. 7, Selection Chart 4; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main breaker, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 4; oem_spec
Current rating	100-225 A, 100K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in (2/0-250) / 39-45 in (2/0-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 4; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S230 p. 7, Selection Chart 4; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00711	RDCH42HXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42HXXX

OEM part number	RDCH42HXXX (XXX = main breaker amp rating)	A	S230 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 1; oem_spec
Current rating	100-225 A, 100K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S230 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00717	RDCH42L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42L225

OEM part number	RDCH42L225	A	S230 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S230 p. 6, Selection Chart 2; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S230 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00732	RDCH42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42L3225

OEM part number	RDCH42L3225	A	S230 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 7, Selection Chart 5; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S230 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00754	REBR42B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit REBR42B3XXX

OEM part number	REBR42B3XXX (XXX = main breaker amp rating)	A	S230 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 42 circuits, Retro Size E: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 9; oem_spec
Current rating	100-225 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S230 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00755	REBR42H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit REBR42H3XXX

OEM part number	REBR42H3XXX (XXX = main breaker amp rating)	A	S230 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 42 circuits, Retro Size E: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 9; oem_spec
Current rating	100-225 A, 100K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S230 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00761	REBR42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit REBR42L3225

OEM part number	REBR42L3225	A	S230 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size E: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S230 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S230 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S230 p. 9, Selection Chart 10; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S230 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S230 pp. 3-4; oem_spec
Dimensions	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in	A	S230 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S230 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S230 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

3.3 CDP — Westinghouse CDP / HCDP distribution panelboard

FAM-EAT-013 · panelboard · aka CDP, CDP/HCDP, CPD, Cutler-Hammer CDP, HCDP, Westinghouse CDP · markings: Cutler-Hammer, Westinghouse

Westinghouse distribution panelboard in 30-50 in wide boxes with chassis rails and vertical chassis bus, 3.50 in phase-to-phase bus centre-lines (switch kits). Series C retrofit kits (KCDP+breaker catalog no.) use same X space as original breakers; KD onto LB connectors requires TAD3 adapter.

Westinghouse distribution (circuit-breaker) panelboard on a chassis with vertical phase busbars at 3.50 in centers and mounting rails 19.50 in apart; X unit = 1.38 in. Boxes 30, 38, 42, 48 and 50 in wide; neutral in side gutter. Branch breakers mount on breaker mounting brackets with copper connectors to the chassis bus; unused space closed by filler covers (KCDP_X). Sumter supplies KCDP connector kits (connectors+brackets+covers+hardware), KCDP retrofit kits (breaker + connector kit) and -H hardware-only kits. Older 'LB' style connectors accept Series C K-frame with TAD3 adapter.

Evidence-only record for the existing Westinghouse CDP family. 1957 Westinghouse literature: CDP distribution panelboard uses E-M frame AB De-ion breakers 15-800 A with screw-driver convertibility; Vol 12 also lists a Cutler-Hammer-branded CDP on the time line and in the Cutler-Hammer replacement chart (E/EA/EH -> REH; EB/EHB -> EHD; F/FA/HF/HFA -> RHF/RHFA; up to N-frame -> ND), noting 'not rated for 100% rated breakers'. A 1946 Westinghouse 'AB De-ion Convertible' distribution panel is a plausible predecessor (unverified).

Attribute	Value	Cl.	Sources
Status	Obsolete; retrofit and connector kits available from Sumter Plant Aftermarket	A	S5 oem_spec
	discontinued; replacement panelboard type PRL4B; parts and kits from Sumter Aftermarket Center	A	S13 pp. V12-T4-4, V12-T4-7, V12-T4-9; oem_spec
Era of manufacture	Westinghouse power panelboard; with FDP, encompassed most Westinghouse MCCBs for more than 34 years (to 1988 redesign); Cutler-Hammer also built CDP under supply agreement	A	S13 pp. V12-T4-2, V12-T4-3; oem_spec
	Advertised by Westinghouse by 1957 (and Type CDP & NLAB installations reported June 1958); Vol 12: CDP and FDP were the most significant Westinghouse types 'for more than 34 years'	A	S454, S440 ECM June 1957 pp.188-189; V12-T4-2; oem_spec
	Vintage Westinghouse (pre-Pow-R-Line 4)	C	S5 inference
Successor	PRL4B (Pow-R-Line 4B)	A	S13 p. V12-T4-7; oem_spec
	PRL4B (functional)	D	S5 inference
Voltage rating	Up to 600 V AC, 250 V DC (1957)	A	S454 ECM June 1957 p.189; oem_spec
Main ampacity	1600 A maximum	A	S13 p. V12-T4-9; oem_spec
	1957: main lugs up to 1200 A, main breakers up to 800 A; Vol 12 layout: 1600 A maximum	A	S454, S440 ECM 1957 p.189; V12-T4-9; oem_spec
Branch breakers accepted	Original EB/EHB/FB/HFB/KA/KB/JA/JB/DA/LA/LB/LC/MA/MC/NB/NC frames; retrofit with Series C EHD..ND via KCDP kits	A	S5 pp.12-14; oem_spec
	Westinghouse E, EA, EH, F, FA (pre-1974), EB, EHB, FB, HFB, CA, JA/KA/HKA, JB/KB/HKB, DA, LA/HLA/LAB, LB/LBB/HLB, LC/HLC, MA/HMA, MC/HMC, NB/HNB, NC/HNC, Tri-Pac FB-P/LA-P/NB-P, LCL; Series C upgrades EHD, FDB, FD, HFD, FDC, ED, JD, DK, KD, LD, MDL, ND	A	S13, S14 p. V12-T4-7; RP01400002E pp. 12-14; oem_spec
	1957: E, F, G, J, K, KL, L and M frame AB De-ion breakers 15-800 A; 'screw driver convertibility'	A	S454 ECM June 1957 pp.188-189; oem_spec
Bus spacing	Vertical bus 3.50 in (88.9 mm) phase-to-phase; mounting rails 19.50 in; if 4.25 in spacing, switches will not fit	A	S5 p.17 Figure 2; oem_spec
X unit	One X = 1.38 in (35.1 mm) of panel height; blank fillers required for unused X space	A	S13 p. V12-T4-9; oem_spec
Bus geometry	Vertical busbars 1.38 in typ, phase centers 3.50 in, mounting rails 19.50 in (applies to CDP and FDP chassis)	A	S14, S13 RP01400002E p. 17 Fig. 2; V12-T4-10; oem_spec
Box widths	CDP and FDP standard widths 30.00, 38.00, 42.00, 48.00 and 50.00 in; neutral located in side gutter	A	S14 p. 2; oem_spec

Attribute	Value	Cl.	Sources
Layout	Main lug top gutter 7-1/2 in; main lug section 5X 225 A, 7X 250-400 A, 9X 600 A, 12X/13X 800-1600 A; thru-feed lugs 10X 225 A, 13X 250-400 A, 17X 600-800 A; 30 in box branch: 1P EB/EHB/HFB 1X, 2P EB/EHB/FB 2X, 3P 3X, CA/CAH 2X-3X, JB/KB/HKB 3X (5 in), DA/LB/LBB/HLB 4X, LA/LC/HLC 6X, MC/HMC/NC/HNC/LCL 6X (48 in box)	A	S13 p. V12-T4-9; oem_spec
Breaker mix rule	Only breakers of the same frame size can be installed across from each other (same horizontal plane); KD breakers can be mounted across from LB breakers if a TAD3 line side adapter is used	A	S13 p. V12-T4-7 notes 4,6; oem_spec
Single pole note	When only one EB, EHB or HFB single-pole breaker is required with other frame size breakers, the space required changes from 1X to 2X	A	S13 p. V12-T4-9 note 1; oem_spec
Renewal doc	Renewal parts data RP01400002E; pricing PL01400002E	A	S13 pp. V12-T4-9, V12-T4-23; oem_spec
Subchassis note	If the CDP panelboard has a subchassis lighting panel, contact Sumter Plant Aftermarket Center (803-481-6677) for breaker selection	A	S14 p. 11; oem_spec
Cutler hammer cdp	Cutler-Hammer-labelled CDP exists (time line 'Cutler-Hammer CDP'; replacement chart rows under Cutler-Hammer panelboard type CDP, note 3 'Not rated for 100% rated breakers'); MP40 kits fit Cutler-Hammer-labelled CDP	A	S440, S441 V12-T4-3, V12-T4-4; oem_spec
Predecessor	1946 Westinghouse NOFUZE line listed 'AB De-ion Convertible' and 'MH Multibreaker' distribution panels (Link between 'AB De-ion Convertible' and CDP is an inference)	D	S435 inference

Breaker families associated: CA, CA/CAH/HCA 225 A frame, Current-limiting FCL / LCL (and FDB+LFB), DA, E, EB, ED, EHB, EHD, F, FB, FD, HFB, JA, JB, JD, KA, KB, KD, LA, LB, LC, LD, MA, MC, MDL, NB, NC, ND, Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), TRI-PAC integrally fused (FB-P, LA-P, NB-P), Tri-Pac, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames), Westinghouse pre-Series C industrial MCCBs

Key documents: S5 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD; S15 RP01400002E (2009) Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition); S435 sim_ecm_1946-09_45 Electrical Construction and Maintenance, Vol 45, September 1946 (Electrical Contracting) -; S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp; S441 Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page; S447 sim_ecm_1958-06_57_6; sim_electrical-south_1958-06_38_6 Electrical Construction and Maintenance June 1958 / Electrical South June 1958 - Westingho; S448 sim_plant-engineering_1960-04_14_4 Plant Engineering Vol 14 No 4-6 (April-June 1960) - Westinghouse ad: flush-mounted type NL; S454 sim_ecm_1957-06_56_6 Electrical Construction and Maintenance, Vol 56 No 6, June 1957 - Westinghouse distributio

Also fits this family (entry printed elsewhere): TAD3, 5155C81G01, K80522, 8450C62H39, K80429, 114C247G01, 3457B16G01, KMP40KD3400, MP40KF100-2, MP40KF225-2, MP40KF225-3, MP40KC225-2, MP40KCHH225-2, MP40KCHH225-3, MP40KLL400-3

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00366	**KFDP4XT**	Westinghouse FDP switch connector kit KFDP4XT	FDPWT 30-30, 60-60, 100-100 A (240 V) / 30-30, 60-60 A (600 V) twin sw A	Listed Feb 2013
EDH-EAT-00367	**KFDP5XT**	Westinghouse FDP switch connector kit KFDP5XT	FDPWT3633R 600 V 100-100 A twin switch; requires vertical bus 3.50 in A	Listed Feb 2013
EDH-EAT-00368	**KFDPB6X-2**	Westinghouse FDP switch connector kit KFDPB6X-2	FDPBS324R / FDPBS364R 200 A switch; requires vertical bus 3.50 in phas A	Listed Feb 2013
EDH-EAT-00370	**KFDPW11X-6**	Westinghouse FDP switch connector kit KFDPW11X-6	FDPW326R / FDPW366R 600 A; requires vertical bus 3.50 in phase-to-phas A	Listed Feb 2013
EDH-EAT-00371	**KFDPW11X-8**	Westinghouse FDP switch connector kit KFDPW11X-8	FDPW367 800 A; requires vertical bus 3.50 in phase-to-phase (will not A	Listed Feb 2013
EDH-EAT-00372	**KFDPW15X-12**	Westinghouse FDP switch connector kit KFDPW15X-12	FDPW368 1200 A; requires vertical bus 3.50 in phase-to-phase (will not A	Listed Feb 2013
EDH-EAT-00369	**KFDPW9X-4**	Westinghouse FDP switch connector kit KFDPW9X-4	FDPW325R / FDPW365R 400 A; requires vertical bus 3.50 in phase-to-phas A	Listed Feb 2013
EDH-EAT-00888	**MP40KC225-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, CA, CAH, HCA, 225 A	CC, CCH A	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00887	**MP40KF100-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, EHB, FS, FB, FH, EHD, FDB, FD, HFD, FDC, 100 A	EHD, FDB, FD, HFD, FDC A	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00890	**MP40KJ225-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, JB, KB, JD, HKB, 225 A	JD, JDB, HJD, JDC A	Listed as an orderable renewal part from the Eaton Panelboar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00891	**MP40KK400-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, KA, KS, KH, LB, HLB (Relectric); JB, KB, JD, HKB (Superbreakers), 400 A	DK, KD, KDB, HKD, KDC **A**	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00893	**MP40KL600-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 600 A	LD, HLD, LDC **A**	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00894	**MP40KM800-3**	Cutler-Hammer MP40 single branch breaker mounting kit, MA, MS, MC, MD, 800 A	MDL, HMDL **A**	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00895	**MP40KN1200-3**	Cutler-Hammer MP40 single branch breaker mounting kit, NB, NS, NC, ND, 1200 A	ND, HND, NDC **A**	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00366 **KFDP4XT** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDP4XT

OEM part number	KFDP4XT	**A**	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPWT 30-30, 60-60, 100-100 A (240 V) / 30-30, 60-60 A (600 V) twin switch	**A**	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	**A**	S14 p. 18; oem_spec
Application	branch	**A**	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	**A**	S14 p. 17; oem_spec
Breaker compatibility	FDPWT 30-30, 60-60, 100-100 A (240 V) / 30-30, 60-60 A (600 V) twin switch; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	**A**	S5 pp.17-18; oem_spec
	Three-pole switch: 30, 60 A (240/600 V) and 100 A (240 V) FDPWT twin switches: FDPWT3211R, FDPWT3611R, FDPWT3222R, FDPWT3622R, FDPWT3233R	**A**	S14 p. 18 Table 21; oem_spec
Poles	3	**A**	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	**A**	S5 p.18; oem_spec
Dimensions	4X space	**A**	S5 oem_spec
	Occupies 5.50 in (139.7 mm) = 4X	**A**	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	**A**	S5 oem_spec
	listed 2013	**B**	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00367 **KFDP5XT** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDP5XT

OEM part number	KFDP5XT	**A**	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPWT3633R 600 V 100-100 A twin switch	**A**	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	**A**	S14 p. 18; oem_spec
Application	branch	**A**	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	**A**	S14 p. 17; oem_spec
Breaker compatibility	FDPWT3633R 600 V 100-100 A twin switch; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	**A**	S5 pp.17-18; oem_spec
	Three-pole switch: 100 A 600 V FDPWT3633R	**A**	S14 p. 18 Table 21; oem_spec
Poles	3	**A**	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	**A**	S5 p.18; oem_spec

Dimensions	5X space	A	S5 oem_spec
	Occupies 6.88 in (174.8 mm) = 5X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00368 **KFDPB6X-2** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPB6X-2

OEM part number	KFDPB6X-2	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPBS324R / FDPBS364R 200 A switch	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPBS324R / FDPBS364R 200 A switch; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 200 A FDPBS324R (240 V), FDPBS364R (600 V)	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	6X space	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00370 **KFDPW11X-6** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPW11X-6

OEM part number	KFDPW11X-6	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW326R / FDPW366R 600 A	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPW326R / FDPW366R 600 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 600 A FDPW326R (240 V), FDPW366R (600 V)	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec

Dimensions	11X space	A	S5 oem_spec
	Occupies 15.13 in (384.3 mm) = 11X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00371 **KFDPW11X-8** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPW11X-8

OEM part number	KFDPW11X-8	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW367 800 A	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPW367 800 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 800 A FDPW367 (table prints 'FDPW36' for 600 V column, apparent truncation)	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	11X space	A	S5 oem_spec
	Occupies 15.13 in (384.3 mm) = 11X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00372 **KFDPW15X-12** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPW15X-12

OEM part number	KFDPW15X-12	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW368 1200 A	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPW368 1200 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 1200 A FDPW368	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec

Dimensions	15X space	A	S5 oem_spec
	Occupies 20.63 in (524.0 mm) = 15X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00369 **KFDPW9X-4** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPW9X-4

OEM part number	KFDPW9X-4	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW325R / FDPW365R 400 A	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPW325R / FDPW365R 400 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 400 A FDPW325R (240 V), FDPW365R (600 V)	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	9X space	A	S5 oem_spec
	Occupies 12.38 in (314.5 mm) = 9X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00888 **MP40KC225-3** Cutler-Hammer branch-connector-kit **LISTED AS AN ORDERABLE**

Cutler-Hammer MP40 twin branch breaker mounting kit, CA, CAH, HCA, 225 A

OEM part number	MP40KC225-3	A	S444, S445, S442 oem_spec
Alternate / superseded numbers	MP40KC225-3H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec
	MP40KC2253 (Superbreakers spelling without hyphen)	C	S445 alias; surplus_listing
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. CC, CCH, 3-pole, 225 A maximum, twin mounting, 3X.	A	S442 p.20 Table 22; oem_spec
	Cutler-Hammer twin mounting kit for MP-style panelboards; 225 A max	C	S444, S445 surplus_listing
Application	branch (twin mount)	A	S444, S445, S442 p.20 Table 22; oem_spec
	Eaton aftermarket MP40 retrofit kits can also add devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards, and Cutler-Hammer NFB panelboards 26.5 to 36 in wide; not for main devices (program-level statement applied to each MP40 kit)	A	S441 Panelboard Aftermarket help page; oem_spec

Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	S444, S445 surplus_listing
Breaker compatibility	CC, CCH	A	S442 p.20 Table 22; oem_spec
	CA, CAH, HCA	C	S444, S445 surplus_listing
Poles	3	A	S442 p.20 Table 22; oem_spec
Current rating	225 A maximum	A	S444, S445, S442 p.20 Table 22; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S445, S441 surplus_listing
Dimensions	Occupies 3X (4.13 in (104.9 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444, S445 surplus_listing
Cross-links	Families: CDP, MP40, MP2, NFB · Breakers: Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames), Cutler-Hammer CC / CCH / CHH		
Not yet documented	OEM instruction document, Material, oem_status_confirmation, Torque values		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00887 **MP40KF100-3** Cutler-Hammer branch-connector-kit **LISTED AS AN ORDERABLE**

Cutler-Hammer MP40 twin branch breaker mounting kit, EHB, FS, FB, FH, EHD, FDB, FD, HFD, FDC, 100 A

OEM part number	MP40KF100-3	A	S444, S445, S442 oem_spec
Alternate / superseded numbers	MP40KF1003 (Superbreakers spelling without hyphen)	C	S445 alias; surplus_listing
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. EHD, FDB, FD, HFD, FDC, 3-pole, 100 A maximum, twin mounting, 3X.	A	S442 p.20 Table 22; oem_spec
	Cutler-Hammer twin mounting kit for MP-style panelboards; 100 A max	C	S444, S445 surplus_listing
Application	branch (twin mount)	A	S444, S445, S442 p.20 Table 22; oem_spec
	Eaton aftermarket MP40 retrofit kits can also add devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards, and Cutler-Hammer NFB panelboards 26.5 to 36 in wide; not for main devices (program-level statement applied to each MP40 kit)	A	S441 Panelboard Aftermarket help page; oem_spec
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	S444, S445 surplus_listing
Breaker compatibility	EHD, FDB, FD, HFD, FDC	A	S442 p.20 Table 22; oem_spec
	EHB, FS, FB, FH, EHD, FDB, FD, HFD, FDC	C	S444, S445 surplus_listing
Poles	3	A	S442 p.20 Table 22; oem_spec
Current rating	100 A maximum	A	S444, S445, S442 p.20 Table 22; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S445, S441 surplus_listing
Dimensions	Occupies 3X (4.13 in (104.9 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec

	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444, S445 surplus_listing
Cross-links	Families: CDP, MP40, MP2, NFB · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames), Cutler-Hammer CC / CCH / CHH		
Not yet documented	OEM instruction document, Material, oem_status_confirmation, Torque values		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00890	**MP40KJ225-3**	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

Cutler-Hammer MP40 twin branch breaker mounting kit, JB, KB, JD, HKB, 225 A

OEM part number	MP40KJ225-3	A	S444, S445, S442 oem_spec
Alternate / superseded numbers	MP40KJ225-3H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec
	MP40KJ2253 (Superbreakers spelling without hyphen)	C	S445 alias; surplus_listing
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. JD, JDB, HJD, JDC, 3-pole, 250 A maximum, twin mounting, 3X.	A	S442 p.20 Table 22; oem_spec
	Cutler-Hammer twin mounting kit for MP-style panelboards; 225 A max	C	S444, S445 surplus_listing
Application	branch (twin mount)	A	S444, S445, S442 p.20 Table 22; oem_spec
	Eaton aftermarket MP40 retrofit kits can also add devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards, and Cutler-Hammer NFB panelboards 26.5 to 36 in wide; not for main devices (program-level statement applied to each MP40 kit)	A	S441 Panelboard Aftermarket help page; oem_spec
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	S444, S445 surplus_listing
Breaker compatibility	JD, JDB, HJD, JDC	A	S442 p.20 Table 22; oem_spec
	JB, KB, JD, HKB	C	S444, S445 surplus_listing
Poles	3	A	S442 p.20 Table 22; oem_spec
Current rating	250 A maximum	A	same as above
	225 A maximum	C	S444, S445 surplus_listing
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S445, S441 surplus_listing
Dimensions	Occupies 3X (4.13 in (104.9 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444, S445 surplus_listing
Cross-links	Families: CDP, MP40, MP2, NFB · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames), Cutler-Hammer CC / CCH / CHH		
Not yet documented	OEM instruction document, Material, oem_status_confirmation, Torque values		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00891	**MP40KK400-3**	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

Cutler-Hammer MP40 twin branch breaker mounting kit, KA, KS, KH, LB, HLB (Relectric); JB, KB, JD, HKB (Superbreakers), 400 A

OEM part number	MP40KK400-3	A	S444, S445, S442 oem_spec
Alternate / superseded numbers	MP40KK400-3H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec

	MP40KK4003 (Superbreakers spelling without hyphen)	C	S445 alias; surplus_listing
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. DK, KD, KDB, HKD, KDC, 3-pole, 400 A maximum, twin mounting, 4X.	A	S442 p.20 Table 22; oem_spec
	Cutler-Hammer twin mounting kit for MP-style panelboards; 400 A max	C	S444, S445 surplus_listing
Application	branch (twin mount)	A	S444, S445, S442 p.20 Table 22; oem_spec
	Eaton aftermarket MP40 retrofit kits can also add devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards, and Cutler-Hammer NFB panelboards 26.5 to 36 in wide; not for main devices (program-level statement applied to each MP40 kit)	A	S441 Panelboard Aftermarket help page; oem_spec
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	S444, S445 surplus_listing
Breaker compatibility	DK, KD, KDB, HKD, KDC	A	S442 p.20 Table 22; oem_spec
	KA, KS, KH, LB, HLB (Relectric); JB, KB, JD, HKB (Superbreakers)	C	S444, S445 surplus_listing
Poles	3	A	S442 p.20 Table 22; oem_spec
Current rating	400 A maximum	A	S444, S445, S442 p.20 Table 22; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S445, S441 surplus_listing
Dimensions	Occupies 4X (5.50 in (139.7 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444, S445 surplus_listing
Cross-links	Families: CDP, MP40, MP2, NFB · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames), Cutler-Hammer CC / CCH / CHH		
Not yet documented	OEM instruction document, Material, oem_status_confirmation, Torque values		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00893	**MP40KL600-3**	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 600 A

OEM part number	MP40KL600-3	A	S444, S442 oem_spec
Alternate / superseded numbers	MP40KL600-3H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. LD, HLD, LDC, 3-pole, 600 A maximum, twin mounting, 6X.	A	S442 p.20 Table 22; oem_spec
	Cutler-Hammer twin mounting kit for MP-style panelboards; 600 A max	C	S444 surplus_listing
Application	branch (twin mount)	A	S444, S442 p.20 Table 22; oem_spec
	Eaton aftermarket MP40 retrofit kits can also add devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards, and Cutler-Hammer NFB panelboards 26.5 to 36 in wide; not for main devices (program-level statement applied to each MP40 kit)	A	S441 Panelboard Aftermarket help page; oem_spec
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	S444 surplus_listing
Breaker compatibility	LD, HLD, LDC	A	S442 p.20 Table 22; oem_spec

	LA, LS, LC, LD, HLC	C	S444 surplus_listing
Poles	3	A	S442 p.20 Table 22; oem_spec
Current rating	600 A maximum	A	S444, S442 p.20 Table 22; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S445, S441 surplus_listing
Dimensions	Occupies 6X (8.25 in (209.6 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444 surplus_listing
Cross-links	Families: CDP, MP40, MP2, NFB · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames), Cutler-Hammer CC / CCH / CHH		
Not yet documented	OEM instruction document, Material, oem_status_confirmation, Torque values		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00894	**MP40KM800-3**	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

Cutler-Hammer MP40 single branch breaker mounting kit, MA, MS, MC, MD, 800 A

OEM part number	MP40KM800-3	A	S444, S445, S442 oem_spec
Alternate / superseded numbers	MP40KM800-3H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec
	MP40KM8003 (Superbreakers spelling without hyphen)	C	S445 alias; surplus_listing
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. MDL, HMDL, 3-pole, 800 A maximum, single mounting, 6X.	A	S442 p.20 Table 22; oem_spec
	Cutler-Hammer single mounting kit for MP-style panelboards; 800 A max	C	S444, S445 surplus_listing
Application	branch (single mount)	A	S444, S445, S442 p.20 Table 22; oem_spec
	Eaton aftermarket MP40 retrofit kits can also add devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards, and Cutler-Hammer NFB panelboards 26.5 to 36 in wide; not for main devices (program-level statement applied to each MP40 kit)	A	S441 Panelboard Aftermarket help page; oem_spec
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	S444, S445 surplus_listing
Breaker compatibility	MDL, HMDL	A	S442 p.20 Table 22; oem_spec
	MA, MS, MC, MD	C	S444, S445 surplus_listing
Poles	3	A	S442 p.20 Table 22; oem_spec
Current rating	800 A maximum	A	S444, S445, S442 p.20 Table 22; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S445, S441 surplus_listing
Dimensions	Occupies 6X (8.25 in (209.6 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444, S445 surplus_listing
Cross-links	Families: CDP, MP40, MP2, NFB · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames), Cutler-Hammer CC / CCH / CHH		

Not yet documented	OEM instruction document, Material, oem_status_confirmation, Torque values		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00895	MP40KN1200-3	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

Cutler-Hammer MP40 single branch breaker mounting kit, NB, NS, NC, ND, 1200 A

OEM part number	MP40KN1200-3	A	S444, S445, S442 oem_spec
Alternate / superseded numbers	MP40KN1200-3H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec
	MP40KN12003 (Superbreakers spelling without hyphen)	C	S445 alias; surplus_listing
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. ND, HND, NDC, 3-pole, 1200 A maximum, single mounting, 6X. (Connector kits are not rated for 100 percent breakers.)	A	S442 p.20 Table 22; oem_spec
	Cutler-Hammer single mounting kit for MP-style panelboards; 1200 A max	C	S444, S445 surplus_listing
Application	branch (single mount)	A	S444, S445, S442 p.20 Table 22; oem_spec
	Eaton aftermarket MP40 retrofit kits can also add devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards, and Cutler-Hammer NFB panelboards 26.5 to 36 in wide; not for main devices (program-level statement applied to each MP40 kit)	A	S441 Panelboard Aftermarket help page; oem_spec
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	S444, S445 surplus_listing
Breaker compatibility	ND, HND, NDC	A	S442 p.20 Table 22; oem_spec
	NB, NS, NC, ND	C	S444, S445 surplus_listing
Poles	3	A	S442 p.20 Table 22; oem_spec
Current rating	1200 A maximum	A	S444, S445, S442 p.20 Table 22; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S445, S441 surplus_listing
Dimensions	Occupies 6X (8.25 in (209.6 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444, S445 surplus_listing
Cross-links	Families: CDP, MP40, MP2, NFB · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames), Cutler-Hammer CC / CCH / CHH		
Not yet documented	OEM instruction document, Material, oem_status_confirmation, Torque values		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00029	**BCDPCACH**	Aftermarket bus connection kit BCDPCACH (seller cross-ref to EAT KCDPCA)	mounts two CA-frame breakers C	offered; condition/aftermarket status not stated on listing
EDH-OTH-00028	**BCDPFBCH**	Aftermarket bus connection kit BCDPFBCH (seller cross-ref to EAT KCDPFB150)	mounts two FB/FD breakers, 150 A max C	offered; condition/aftermarket status not stated on listing
EDH-OTH-00030	**BCDPKBCH**	Aftermarket bus connection kit BCDPKBCH (seller cross-ref to EAT KCDPKB)	mounts two JB, KB, JD or HJD breakers C	offered; condition/aftermarket status not stated on listing

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00032	**BCDPLACH**	Aftermarket bus connection kit BCDPLACH (seller cross-ref to EAT KCDPLA400)	mounts two LA, HLA, LC or LD breakers, 400 A max **C**	offered; condition/aftermarket status not stated on listing
EDH-OTH-00031	**BCDPLBCH**	Aftermarket bus connection kit BCDPLBCH (seller cross-ref to EAT KCDPLB)	mounts two LB, HLB, JA or KA breakers (KD and HKD with TAD3 adapters) **C**	offered; condition/aftermarket status not stated on listing
EDH-OTH-00033	**BCDPLCCH**	Aftermarket bus connection kit BCDPLCCH (seller cross-ref to EAT KCDPLA600)	mounts two LA, HLA, LC, LD or HLD breakers (600 A) **C**	offered; condition/aftermarket status not stated on listing
EDH-OTH-00034	**BCDPMACH**	Aftermarket bus connection kit BCDPMACH (seller cross-ref to EAT KCDPMA)	mounts one MA, HMA, MC, MD, HMD, MDL frame breaker **C**	offered; condition/aftermarket status not stated on listing
EDH-OTH-00035	**BCDPNBCH**	Aftermarket bus connection kit BCDPNBCH (seller cross-ref to EAT KCDPNB)	mounts one NB, HNB, NC, ND, HND frame breaker **C**	offered; condition/aftermarket status not stated on listing
EDH-EAT-00343	**KCDPCA**	Westinghouse CDP breaker connector kit KCDPCA (CA...)	CA, CAH, HCA 3-pole **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00341	**KCDPED225**	Westinghouse CDP breaker connector kit KCDPED225 (FD...)	FD, FDB, HFD, FDC, ED, EDH, EDC 3-pole **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00340	**KCDPFB100**	Westinghouse CDP breaker connector kit KCDPFB100 (EHD...)	EHD, FDB, FD, HFD, FDC 3-pole (100 A max) **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-01239	**KCDPFB150**	Westinghouse CDP breaker connector kit KCDPFB150 (FB/FD twin, 150 A) - per aftermarket seller cross-reference	—	unknown
EDH-EAT-00342	**KCDPFBP**	Westinghouse CDP breaker connector kit KCDPFBP (FB-P...)	FB-P, FCL 3-pole **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00344	**KCDPKB**	Westinghouse CDP breaker connector kit KCDPKB (JD...)	JD, JDB, HJD, JDC 3-pole **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00346	**KCDPLA400**	Westinghouse CDP breaker connector kit KCDPLA400 (LA-P 3-pole...)	LA-P 3-pole **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00347	**KCDPLA600**	Westinghouse CDP breaker connector kit KCDPLA600 (LD...)	LD, HLD, LDC 3-pole **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00345	**KCDPLB**	Westinghouse CDP breaker connector kit KCDPLB (DK...)	DK, KD, KDB, HKD, KDC 3-pole **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00348	**KCDPLCL**	Westinghouse CDP breaker connector kit KCDPLCL (LCL 3-pole...)	LCL 3-pole **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-01240	**KCDPMA**	Westinghouse CDP breaker connector kit KCDPMA (MA/MC/MDL single) - per aftermarket seller cross-reference	—	unknown
EDH-EAT-00349	**KCDPMC**	Westinghouse CDP breaker connector kit KCDPMC (MDL...)	MDL, HMDL 3-pole **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-01241	**KCDPNB**	Westinghouse CDP breaker connector kit KCDPNB (NB/NC/ND single) - per aftermarket seller cross-reference	—	unknown
EDH-EAT-00351	**KCDPNBP**	Westinghouse CDP breaker connector kit KCDPNBP (NB-P 3-pole...)	NB-P 3-pole **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00350	**KCDPNC**	Westinghouse CDP breaker connector kit KCDPNC (ND...)	ND, HND 3-pole (not rated for 100% breakers) **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)

EDH-OTH-00029	BCDPCACH	Breaker King	breaker-mounting-kit	OFFERED; CONDITION/AFT

Aftermarket bus connection kit BCDPCACH (seller cross-ref to EAT KCDPCA)

OEM part number	BCDPCACH (Breaker King catalog/model number)	C	S630 distributor
Alternate / superseded numbers	KCDPCA [equivalent] (seller cross-reference: 'Kit CA1K replaces OEM KCDPCA')	C	same as above
	CA1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for Westinghouse CDP panelboards; mounts two CA-frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two CA-frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	offered; condition/aftermarket status not stated on listing (kit-numbering style matches the seller's aftermarket series) (seller claim)	D	same as above
Replacement / successor	Seller states it replaces OEM KCDPCA ('Kit CA1K replaces OEM KCDPCA') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Is this an OEM, surplus or aftermarket-manufactured kit?*		

EDH-OTH-00028	BCDPFBCH	Breaker King	breaker-mounting-kit	OFFERED; CONDITION/AFT

Aftermarket bus connection kit BCDPFBCH (seller cross-ref to EAT KCDPFB150)

OEM part number	BCDPFBCH (Breaker King catalog/model number)	C	S630 distributor
Alternate / superseded numbers	KCDPFB150 [equivalent] (seller cross-reference: 'Kit FB1K replaces OEM KCDPFB150')	C	same as above
	FB1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for Westinghouse CDP panelboards; mounts two FB/FD breakers, 150 A max (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two FB/FD breakers, 150 A max (seller claim; compatibility from distributor only)	C	same as above
Status	offered; condition/aftermarket status not stated on listing (kit-numbering style matches the seller's aftermarket series) (seller claim)	D	same as above
Replacement / successor	Seller states it replaces OEM KCDPFB150 ('Kit FB1K replaces OEM KCDPFB150') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Is this an OEM, surplus or aftermarket-manufactured kit?*		

EDH-OTH-00030	BCDPKBCH	Breaker King	breaker-mounting-kit	OFFERED; CONDITION/AFT

Aftermarket bus connection kit BCDPKBCH (seller cross-ref to EAT KCDPKB)

OEM part number	BCDPKBCH (Breaker King catalog/model number)	C	S630 distributor
Alternate / superseded numbers	KCDPKB [equivalent] (seller cross-reference: 'Kit KB1K replaces OEM KCDPKB')	C	same as above
	KB1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for Westinghouse CDP panelboards; mounts two JB, KB, JD or HJD breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two JB, KB, JD or HJD breakers (seller claim; compatibility from distributor only)	C	same as above
Status	offered; condition/aftermarket status not stated on listing (kit-numbering style matches the seller's aftermarket series) (seller claim)	D	same as above
Replacement / successor	Seller states it replaces OEM KCDPKB ('Kit KB1K replaces OEM KCDPKB') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Is this an OEM, surplus or aftermarket-manufactured kit?*		

EDH-OTH-00032	BCDPLACH	Breaker King	breaker-mounting-kit	OFFERED; CONDITION/AFT

Aftermarket bus connection kit BCDPLACH (seller cross-ref to EAT KCDPLA400)

OEM part number	BCDPLACH (Breaker King catalog/model number)	C	S630 distributor
Alternate / superseded numbers	KCDPLA400 [equivalent] (seller cross-reference: 'Kit LA4K replaces OEM KCDPLA400')	C	same as above
	LA4K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for Westinghouse CDP panelboards; mounts two LA, HLA, LC or LD breakers, 400 A max (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two LA, HLA, LC or LD breakers, 400 A max (seller claim; compatibility from distributor only)	C	same as above
Status	offered; condition/aftermarket status not stated on listing (kit-numbering style matches the seller's aftermarket series) (seller claim)	D	same as above
Replacement / successor	Seller states it replaces OEM KCDPLA400 ('Kit LA4K replaces OEM KCDPLA400') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Is this an OEM, surplus or aftermarket-manufactured kit?*		

EDH-OTH-00031	BCDPLBCH	Breaker King	breaker-mounting-kit	OFFERED; CONDITION/AFT

Aftermarket bus connection kit BCDPLBCH (seller cross-ref to EAT KCDPLB)

OEM part number	BCDPLBCH (Breaker King catalog/model number)	C	S630 distributor
Alternate / superseded numbers	KCDPLB [equivalent] (seller cross-reference: 'Kit LB1K replaces OEM KCDPLB')	C	same as above
	LB1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for Westinghouse CDP panelboards; mounts two LB, HLB, JA or KA breakers (KD and HKD with TAD3 adapters) (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two LB, HLB, JA or KA breakers (KD and HKD with TAD3 adapters) (seller claim; compatibility from distributor only)	C	same as above
Status	offered; condition/aftermarket status not stated on listing (kit-numbering style matches the seller's aftermarket series) (seller claim)	D	same as above
Replacement / successor	Seller states it replaces OEM KCDPLB ('Kit LB1K replaces OEM KCDPLB') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Is this an OEM, surplus or aftermarket-manufactured kit?*		

EDH-OTH-00033	BCDPLCCH	Breaker King	breaker-mounting-kit	OFFERED; CONDITION/AFT

Aftermarket bus connection kit BCDPLCCH (seller cross-ref to EAT KCDPLA600)

OEM part number	BCDPLCCH (Breaker King catalog/model number)	C	S630 distributor
Alternate / superseded numbers	KCDPLA600 [equivalent] (seller cross-reference: 'Kit LA6K replaces OEM KCDPLA600')	C	same as above
	LA6K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for Westinghouse CDP panelboards; mounts two LA, HLA, LC, LD or HLD breakers (600 A) (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two LA, HLA, LC, LD or HLD breakers (600 A) (seller claim; compatibility from distributor only)	C	same as above
Status	offered; condition/aftermarket status not stated on listing (kit-numbering style matches the seller's aftermarket series) (seller claim)	D	same as above
Replacement / successor	Seller states it replaces OEM KCDPLA600 ('Kit LA6K replaces OEM KCDPLA600') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Is this an OEM, surplus or aftermarket-manufactured kit?*		

EDH-OTH-00034	BCDPMACH	Breaker King	breaker-mounting-kit	OFFERED; CONDITION/AFT

Aftermarket bus connection kit BCDPMACH (seller cross-ref to EAT KCDPMA)

OEM part number	BCDPMACH (Breaker King catalog/model number)	C	S630 distributor
Alternate / superseded numbers	KCDPMA [equivalent] (seller cross-reference: 'Kit MA8K replaces OEM KCDPMA')	C	same as above
	MA8K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for Westinghouse CDP panelboards; mounts one MA, HMA, MC, MD, HMD, MDL frame breaker (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one MA, HMA, MC, MD, HMD, MDL frame breaker (seller claim; compatibility from distributor only)	C	same as above
Status	offered; condition/aftermarket status not stated on listing (kit-numbering style matches the seller's aftermarket series) (seller claim)	D	same as above
Replacement / successor	Seller states it replaces OEM KCDPMA ('Kit MA8K replaces OEM KCDPMA') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Is this an OEM, surplus or aftermarket-manufactured kit?*		

EDH-OTH-00035	BCDPNBCH	Breaker King	breaker-mounting-kit	OFFERED; CONDITION/AFT

Aftermarket bus connection kit BCDPNBCH (seller cross-ref to EAT KCDPNB)

OEM part number	BCDPNBCH (Breaker King catalog/model number)	C	S630 distributor
Alternate / superseded numbers	KCDPNB [equivalent] (seller cross-reference: 'Kit NB12K replaces OEM KCDPNB')	C	same as above
	NB12K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for Westinghouse CDP panelboards; mounts one NB, HNB, NC, ND, HND frame breaker (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one NB, HNB, NC, ND, HND frame breaker (seller claim; compatibility from distributor only)	C	same as above
Status	offered; condition/aftermarket status not stated on listing (kit-numbering style matches the seller's aftermarket series) (seller claim)	D	same as above
Replacement / successor	Seller states it replaces OEM KCDPNB ('Kit NB12K replaces OEM KCDPNB') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Is this an OEM, surplus or aftermarket-manufactured kit?*		

EDH-EAT-00343	KCDPCA	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPCA (CA...)

OEM part number	KCDPCA	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for CA, CAH, HCA 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	CA, CAH, HCA 3-pole	A	S5 p.14 Table 19; oem_spec
	CA, CAH, HCA	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	225 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec

Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Aftermarket / reproduction	Breaker King offers BCDPCACH (kit # CA1K) as a replacement ('Kit CA1K replaces OEM KCDPCA'), condition not stated (seller claim; seller cross-reference; equivalence/listing not verified)	C	S630 distributor
Cross-links	Families: CDP · Breakers: CA/CAH/HCA 225 A frame, Westinghouse pre-Series C industrial MCCBs, CA		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00341	KCDPED225	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPED225 (FD...)

OEM part number	KCDPED225	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for FD, FDB, HFD, FDC, ED, EDH, EDC 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	FD, FDB, HFD, FDC, ED, EDH, EDC 3-pole	A	S5 p.14 Table 19; oem_spec
	FD, FDB, HFD, FDC, ED, EDH, EDC	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	225 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Westinghouse pre-Series C industrial MCCBs, FD, ED		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00340	KCDPFB100	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPFB100 (EHD...)

OEM part number	KCDPFB100	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for EHD, FDB, FD, HFD, FDC 3-pole (100 A max)	A	S5 p.14; oem_spec

	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	EHD, FDB, FD, HFD, FDC 3-pole (100 A max)	A	S5 p.14 Table 19; oem_spec
	EHD, FDB, FD, HFD, FDC (100 A maximum)	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	100 A maximum	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse FB-frame designation; 100 A max (note a)	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse pre-Series C industrial MCCBs, EB, EHB, FB, HFB, EHD, FD		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-01239	KCDPFB150	Eaton lineage	breaker-mounting-kit	STATUS UNKNOWN

Westinghouse CDP breaker connector kit KCDPFB150 (FB/FD twin, 150 A) - per aftermarket seller cross-reference

OEM part number	KCDPFB150 (OEM number known only from aftermarket seller cross-reference)	C	S630 distributor
Description	Bus connection hardware for Westinghouse CDP panelboards; mounts two FB/FD breakers, 150 A max (inferred from aftermarket seller's description of its replacement)	C	same as above
Aftermarket / reproduction	Breaker King offers BCDPFBCH (kit # FB1K) as a replacement ('Kit FB1K replaces OEM KCDPFB150'), condition not stated (seller claim; seller cross-reference; equivalence/listing not verified)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-EAT-00342	KCDPFBP	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPFBP (FB-P...)

OEM part number	KCDPFBP	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for FB-P, FCL 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	FB-P, FCL 3-pole	A	S5 p.14 Table 19; oem_spec
	FB-P, FCL	A	S14 p. 14 Table 19; oem_spec

Poles	3	A	same as above
Current rating	100 A (FB-P 15-100 A)	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Current-limiting FCL / LCL (and FDB+LFB), Westinghouse pre-Series C industrial MCCBs, Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00344	KCDPKB	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPKB (JD...)

OEM part number	KCDPKB	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for JD, JDB, HJD, JDC 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	JD, JDB, HJD, JDC 3-pole	A	S5 p.14 Table 19; oem_spec
	JD, JDB, HJD, JDC	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	250 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Aftermarket / reproduction	Breaker King offers BCDPKBCH (kit # KB1K) as a replacement ('Kit KB1K replaces OEM KCDPKB'), condition not stated (seller claim; seller cross-reference; equivalence/listing not verified)	C	S630 distributor
Identification features	Kit name retains Westinghouse KB-frame designation (KB/HKB -> JD per cross-reference)	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Westinghouse pre-Series C industrial MCCBs, KB, JB, JD		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Open question	*Connector-kit naming (KCDPKB, KCDPLB, KCDPLA, KCDPMC, KCDPNC) mirrors original Westinghouse frames KB/LB/LA/MC/NC - confirm these are the same connector geometries as original CDP straps.*		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00346	KCDPLA400	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPLA400 (LA-P 3-pole...)

OEM part number	KCDPLA400	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for LA-P 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	LA-P 3-pole	A	S5 p.14 Table 19; oem_spec
	LA-P	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	400 A (LA-P 70-400 A)	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Aftermarket / reproduction	Breaker King offers BCDPLACH (kit # LA4K) as a replacement ('Kit LA4K replaces OEM KCDPLA400'), condition not stated (seller claim; seller cross-reference; equivalence/listing not verified)	C	S630 distributor
Cross-links	Families: CDP · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Westinghouse pre-Series C industrial MCCBs, Tri-Pac		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00347	KCDPLA600	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPLA600 (LD...)

OEM part number	KCDPLA600	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for LD, HLD, LDC 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	LD, HLD, LDC 3-pole	A	S5 p.14 Table 19; oem_spec
	LD, HLD, LDC	A	S14 p. 14 Table 19; oem_spec

Poles	3	A	same as above
Current rating	600 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Aftermarket / reproduction	Breaker King offers BCDPLCCH (kit # LA6K) as a replacement ('Kit LA6K replaces OEM KCDPLA600'), condition not stated (seller claim; seller cross-reference; equivalence/listing not verified)	C	S630 distributor
Identification features	Kit name retains Westinghouse LA-frame designation	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Westinghouse pre-Series C industrial MCCBs, LA, LC, LD		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00345	KCDPLB	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPLB (DK...)

OEM part number	KCDPLB	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for DK, KD, KDB, HKD, KDC 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	DK, KD, KDB, HKD, KDC 3-pole	A	S5 p.14 Table 19; oem_spec
	DK, KD, KDB, HKD, KDC	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	400 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	4X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 5.50 in (139.7 mm) = 4X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Aftermarket / reproduction	Breaker King offers BCDPLBCH (kit # LB1K) as a replacement ('Kit LB1K replaces OEM KCDPLB'), condition not stated (seller claim; seller cross-reference; equivalence/listing not verified)	C	S630 distributor
Identification features	Kit name retains Westinghouse LB-frame designation	C	S14 p. 14; inference

Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, KA, DA, LB, KD		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Connector-kit naming (KCDPKB, KCDPLB, KCDPLA, KCDPMC, KCDPNC) mirrors original Westinghouse frames KB/LB/LA/MC/NC - confirm these are the same connector geometries as original CDP straps.*		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00348	KCDPLCL	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPLCL (LCL 3-pole...)

OEM part number	KCDPLCL	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for LCL 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	LCL 3-pole	A	S5 p.14 Table 19; oem_spec
	LCL	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	LCL 125-400 A	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: Current-limiting FCL / LCL (and FDB+LFB), Westinghouse pre-Series C industrial MCCBs		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-01240	KCDPMA	Eaton lineage	breaker-mounting-kit	STATUS UNKNOWN

Westinghouse CDP breaker connector kit KCDPMA (MA/MC/MDL single) - per aftermarket seller cross-reference

OEM part number	KCDPMA (OEM number known only from aftermarket seller cross-reference)	C	S630 distributor
Description	Bus connection hardware for Westinghouse CDP panelboards; mounts one MA, HMA, MC, MD, HMD, MDL frame breaker (inferred from aftermarket seller's description of its replacement)	C	same as above
Aftermarket / reproduction	Breaker King offers BCDPMACH (kit # MA8K) as a replacement ('Kit MA8K replaces OEM KCDPMA'), condition not stated (seller claim; seller cross-reference; equivalence/listing not verified)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-EAT-00349	KCDPMC	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPMC (MDL...)

OEM part number	KCDPMC	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for MDL, HMDL 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	MDL, HMDL 3-pole	A	S5 p.14 Table 19; oem_spec
	MDL, HMDL	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	800 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse MC-frame designation	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Westinghouse pre-Series C industrial MCCBs, MA, MC, MDL		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-01241	KCDPNB	Eaton lineage	breaker-mounting-kit	STATUS UNKNOWN

Westinghouse CDP breaker connector kit KCDPNB (NB/NC/ND single) - per aftermarket seller cross-reference

OEM part number	KCDPNB (OEM number known only from aftermarket seller cross-reference)	C	S630 distributor
Description	Bus connection hardware for Westinghouse CDP panelboards; mounts one NB, HNB, NC, ND, HND frame breaker (inferred from aftermarket seller's description of its replacement)	C	same as above
Aftermarket / reproduction	Breaker King offers BCDPNBCH (kit # NB12K) as a replacement ('Kit NB12K replaces OEM KCDPNB'), condition not stated (seller claim; seller cross-reference; equivalence/listing not verified)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-EAT-00351	KCDPNBP	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPNBP (NB-P 3-pole...)

OEM part number	KCDPNBP	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for NB-P 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S14 pp. 10, 14, 17; oem_spec

Breaker compatibility	NB-P 3-pole	A	S5 p.14 Table 19; oem_spec
	NB-P	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	800 A (NB-P 300-800 A)	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Westinghouse pre-Series C industrial MCCBs, Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00350	KCDPNC	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPNC (ND...)

OEM part number	KCDPNC	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for ND, HND 3-pole (not rated for 100% breakers)	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	ND, HND 3-pole (not rated for 100% breakers)	A	S5 p.14 Table 19; oem_spec
	ND, HND	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	1200 A frame; not rated for 100 percent breakers	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Note b: connector kits are not rated for 100 percent breakers	A	S14 p. 14; oem_spec
Cross-links	Families: CDP · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Westinghouse pre-Series C industrial MCCBs, NB, NC, ND		

Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00141	**BFP1WE**	Deadfront filler blank BFP1WE for Westinghouse CDP (1X)	—	unknown
EDH-OTH-00142	**BFP2WE**	Deadfront filler blank BFP2WE for Westinghouse CDP (2X)	—	unknown
EDH-OTH-00143	**BFP3WE**	Deadfront filler blank BFP3WE for Westinghouse CDP (3X)	—	unknown
EDH-EAT-00352	**KCDP_X**	CDP filler cover (any X increment)	—	Listed Feb 2013

EDH-OTH-00141	BFP1WE	Breaker King	filler-plate	STATUS UNKNOWN

Deadfront filler blank BFP1WE for Westinghouse CDP (1X)

OEM part number	BFP1WE	C	S630 distributor
Alternate / superseded numbers	WFP1 [alias] (number given in seller description; whether OEM or seller code not stated)	D	same as above
Description	Gray steel deadfront filler blank 1X 1.375 in H x 18-1/2 in W for Westinghouse CDP panelboards	C	same as above
Dimensions	1X 1.375 in H x 18-1/2 in W	C	same as above
Cross-links	Families: CDP		
Not yet documented	Material, Status		

EDH-OTH-00142	BFP2WE	Breaker King	filler-plate	STATUS UNKNOWN

Deadfront filler blank BFP2WE for Westinghouse CDP (2X)

OEM part number	BFP2WE	C	S630 distributor
Alternate / superseded numbers	WFP2 [alias] (number given in seller description; whether OEM or seller code not stated)	D	same as above
Description	Gray steel deadfront filler blank 2X 2-3/4 in H x 18-1/2 in W for Westinghouse CDP panelboards	C	same as above
Dimensions	2X 2-3/4 in H x 18-1/2 in W	C	same as above
Cross-links	Families: CDP		
Not yet documented	Material, Status		

EDH-OTH-00143	BFP3WE	Breaker King	filler-plate	STATUS UNKNOWN

Deadfront filler blank BFP3WE for Westinghouse CDP (3X)

OEM part number	BFP3WE	C	S630 distributor
Alternate / superseded numbers	WFP3 [alias] (number given in seller description; whether OEM or seller code not stated)	D	same as above
Description	Gray steel deadfront filler blank 3X 4-1/8 in H x 18-1/2 in W for Westinghouse CDP panelboards	C	same as above
Dimensions	3X 4-1/8 in H x 18-1/2 in W	C	same as above
Cross-links	Families: CDP		
Not yet documented	Material, Status		

EDH-EAT-00352	KCDP_X	Westinghouse	filler-plate	LISTED FEB 2013

CDP filler cover (any X increment)

OEM part number	KCDP_X	A	S5 p.14; oem_spec
	KCDP_X (fill in number of X, e.g. KCDP3X) (pattern; example KCDP3X is constructed, not printed)	A	S14 p. 14 'CDP filler covers'; oem_spec
Description	CDP filler covers available in any 1X (1.38 in) increment; catalog KCDP_X with blank = size (e.g. KCDP3X); includes cover, mounting brackets and hardware	A	S5 p.14; oem_spec
	CDP filler cover available in any increment of 1X = 1.38 in (35.1 mm); includes cover, mounting brackets and hardware	A	S14 p. 14; oem_spec
Installation location	Closes unused X space on CDP chassis; blank fillers are required for unused X space	A	S13 p. V12-T4-9; oem_spec
Kit contents	Cover, mounting brackets, hardware	A	S14 p. 14; oem_spec
Dimensions	Height = n x 1.38 in (35.1 mm)	A	same as above
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: CDP		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values, width		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00445	**0080429**	Panelboard trim lock — T-handle lock	—	listed 2013; contact Sumter for price

EDH-EAT-00445	0080429	Westinghouse	trim	LISTED 2013; CONTACT S

Panelboard trim lock — T-handle lock

OEM part number	0080429	A	S14 p. 19 Table 22; oem_spec
Description	T-handle lock; once used on all panels over 48.00 in high and on outdoor (N3R) panels	A	same as above
Dimensions	approx. 2.50 in (63.5 mm) per drawing (dimension-to-part association read from figure layout)	C	S14 p. 19 drawing; oem_drawing
Status	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3		
Not yet documented	key_code, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00420	**414A380G02**	Trim clamp for CDP, FDP and NQB	—	Shown as 'No Longer Available' in RP01400002E figure
EDH-EAT-00423	**KCDPFB100-H**	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of '-H' suffix	—	listed 2013

EDH-EAT-00420	414A380G02	Cutler-Hammer	hardware-kit	SHOWN AS 'NO LONGER AV

Trim clamp for CDP, FDP and NQB

OEM part number	414A380G02	A	S5, S14 oem_spec
Description	Trim clamp for CDP, FDP and NQB (2.50 in long) - marked 'No Longer Available'	A	S5 oem_spec
	Trim clamp used to mount Fastrims (concealed trim-mounting hardware); bag of six; some larger panels need more than one bag	A	S14 p. 19; oem_spec
Application	accessory	A	same as above
Installation location	Used on CDP, FDP and NQB	A	same as above
Kit contents	Bag of six clamps	A	same as above
Dimensions	Overall length 2.50 in (63.5 mm)	A	same as above
Status	Shown as 'No Longer Available' in RP01400002E figure (Placement of 'No Longer Available' label in figure is ambiguous between 414A380G02 and neighbouring item)	B	S5 p.19; oem_spec
Cross-links	Families: CDP, FDP, NLAB		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00423	KCDPFB100-H	Cutler-Hammer	hardware-kit	LISTED 2013

CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of '-H' suffix

OEM part number	KCDPFB100-H	A	S14 p. 14 (Hardware kit example); oem_spec
Alternate / superseded numbers	KCDPFD100H (2009 edition prints the example as KCDPFD100H; 2013 prints KCDPFB100-H. Likely a typo/format change, not a separate part)	C	S15 alias; RP01400002E (2009) p. 14; oem_spec
Description	Hardware kit: mounting bracket(s), filler plates and mounting hardware ONLY. Formed by adding '-H' to the appropriate CDP connector kit catalog number	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Kit contents	Mounting bracket(s), filler plates, mounting hardware (no copper connectors)	A	same as above
Status	listed 2013	B	S14, S15 p. 14; oem_spec
Cross-links	Families: CDP · Breakers: EHD, FD		
Not yet documented	Dimensions, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Is the -H suffix valid for every KCDP connector kit (e.g. KCDPLB-H, KCDPNC-H)?*		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00361	**KCDPDK**	CDP Series C DK breaker retrofit kit (replaces Westinghouse DA)	Replaces existing Westinghouse DA (250-400 A); Series C frame uses the A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00353	**KCDPEHD**	CDP Series C EHD breaker retrofit kit (replaces Westinghouse EB, EHB)	Replaces existing Westinghouse EB, EHB (15-100 A); Series C frame uses A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00355	**KCDPFD**	CDP Series C FD breaker retrofit kit (replaces Westinghouse HFB)	Replaces existing Westinghouse HFB (15-150 A); Series C frame uses the A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00354	**KCDPFDB**	CDP Series C FDB breaker retrofit kit (replaces Westinghouse FB)	Replaces existing Westinghouse FB (15-150 A); Series C frame uses the A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00357	**KCDPHKD**	CDP Series C HKD breaker retrofit kit (replaces Westinghouse HKA)	Replaces existing Westinghouse HKA (70-225 A); Series C frame uses the A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00358	**KCDPJD**	CDP Series C JD breaker retrofit kit (replaces Westinghouse KB, HKB)	Replaces existing Westinghouse KB, HKB (70-250 A); Series C frame uses A	Listed Feb 2013 (Sumter Plant Aftermarket Center)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00360	**KCDPJDB**	CDP Series C JDB breaker retrofit kit (replaces Westinghouse JB)	Replaces existing Westinghouse JB (70-250 A); Series C frame uses the **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00356	**KCDPKD**	CDP Series C KD breaker retrofit kit (replaces Westinghouse KA)	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125- **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00359	**KCDPKDB**	CDP Series C KDB breaker retrofit kit (replaces Westinghouse JA)	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A); Series **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00362	**KCDPLD**	CDP Series C LD breaker retrofit kit (replaces Westinghouse LA, HLA)	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00363	**KCDPMDL**	CDP Series C MDL breaker retrofit kit (replaces Westinghouse MA, HMA)	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A); Se **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00364	**KCDPND**	CDP Series C ND breaker retrofit kit (replaces Westinghouse NB, HNB)	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)

EDH-EAT-00361	KCDPDK	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C DK breaker retrofit kit (replaces Westinghouse DA)

OEM part number	KCDPDK	**A**	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPDK (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	**A**	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse DA breaker (existing breaker superseded by this Series C retrofit)	**A**	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C DK breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	**A**	S5 p.12; oem_spec
	CDP retrofit kit: one Series C DK breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	**A**	S14 pp. 12-13; oem_spec
Application	branch	**A**	S14 p. 12; oem_spec
	Eaton aftermarket CDP retrofit kit (breaker + connector kit + mounting hardware + cover + instructions) to add a branch device to an existing Westinghouse CDP chassis; not for replacing or creating a main device; CDP standard widths 30, 38, 42, 48 in; required space must be available; also usable to add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	**A**	S441 Panelboard Aftermarket help page; oem_spec
Breaker compatibility	Replaces existing Westinghouse DA (250-400 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	**A**	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse DA (250-400 A) with Series C DK	**A**	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	**A**	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	**A**	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	**B**	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, DA, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00353	KCDPEHD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C EHD breaker retrofit kit (replaces Westinghouse EB, EHB)

OEM part number	KCDPEHD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPEHD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse EB, EHB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C EHD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C EHD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
	Eaton aftermarket CDP retrofit kit (breaker + connector kit + mounting hardware + cover + instructions) to add a branch device to an existing Westinghouse CDP chassis; not for replacing or creating a main device; CDP standard widths 30, 38, 42, 48 in; required space must be available; also usable to add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Breaker compatibility	Replaces existing Westinghouse EB, EHB (15-100 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse EB, EHB (15-100 A) with Series C EHD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse pre-Series C industrial MCCBs, EB, EHB, EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00355	KCDPFD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C FD breaker retrofit kit (replaces Westinghouse HFB)

OEM part number	KCDPFD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPFD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse HFB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C FD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C FD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
	Eaton aftermarket CDP retrofit kit (breaker + connector kit + mounting hardware + cover + instructions) to add a branch device to an existing Westinghouse CDP chassis; not for replacing or creating a main device; CDP standard widths 30, 38, 42, 48 in; required space must be available; also usable to add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Breaker compatibility	Replaces existing Westinghouse HFB (15-150 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse HFB (15-150 A) with Series C FD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse pre-Series C industrial MCCBs, HFB, FD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00354	KCDPFDB	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C FDB breaker retrofit kit (replaces Westinghouse FB)

OEM part number	KCDPFDB	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPFDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse FB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C FDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C FDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
	Eaton aftermarket CDP retrofit kit (breaker + connector kit + mounting hardware + cover + instructions) to add a branch device to an existing Westinghouse CDP chassis; not for replacing or creating a main device; CDP standard widths 30, 38, 42, 48 in; required space must be available; also usable to add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Breaker compatibility	Replaces existing Westinghouse FB (15-150 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse FB (15-150 A) with Series C FDB	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse pre-Series C industrial MCCBs, FB, FD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00357	KCDPHKD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C HKD breaker retrofit kit (replaces Westinghouse HKA)

OEM part number	KCDPHKD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPHKD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse HKA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C HKD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C HKD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
	Eaton aftermarket CDP retrofit kit (breaker + connector kit + mounting hardware + cover + instructions) to add a branch device to an existing Westinghouse CDP chassis; not for replacing or creating a main device; CDP standard widths 30, 38, 42, 48 in; required space must be available; also usable to add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Breaker compatibility	Replaces existing Westinghouse HKA (70-225 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse HKA (70-225 A) with Series C HKD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, KA, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00358	KCDPJD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C JD breaker retrofit kit (replaces Westinghouse KB, HKB)

OEM part number	KCDPJD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPJD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse KB, HKB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C JD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C JD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
	Eaton aftermarket CDP retrofit kit (breaker + connector kit + mounting hardware + cover + instructions) to add a branch device to an existing Westinghouse CDP chassis; not for replacing or creating a main device; CDP standard widths 30, 38, 42, 48 in; required space must be available; also usable to add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Breaker compatibility	Replaces existing Westinghouse KB, HKB (70-250 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse KB, HKB (70-250 A) with Series C JD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Westinghouse pre-Series C industrial MCCBs, KB, JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00360	KCDPJDB	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C JDB breaker retrofit kit (replaces Westinghouse JB)

OEM part number	KCDPJDB	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPJDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse JB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C JDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C JDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
	Eaton aftermarket CDP retrofit kit (breaker + connector kit + mounting hardware + cover + instructions) to add a branch device to an existing Westinghouse CDP chassis; not for replacing or creating a main device; CDP standard widths 30, 38, 42, 48 in; required space must be available; also usable to add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Breaker compatibility	Replaces existing Westinghouse JB (70-250 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse JB (70-250 A) with Series C JDB	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Westinghouse pre-Series C industrial MCCBs, JB, JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00356	KCDPKD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C KD breaker retrofit kit (replaces Westinghouse KA)

OEM part number	KCDPKD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPKD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse KA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C KD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C KD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
	Eaton aftermarket CDP retrofit kit (breaker + connector kit + mounting hardware + cover + instructions) to add a branch device to an existing Westinghouse CDP chassis; not for replacing or creating a main device; CDP standard widths 30, 38, 42, 48 in; required space must be available; also usable to add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Breaker compatibility	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125-400 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec

	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125-400 A) with Series C KD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, KA, LB, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*KD onto existing LB connectors requires TAD3 adapter (included in KD retrofit kits).*		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00359	KCDPKDB	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C KDB breaker retrofit kit (replaces Westinghouse JA)

OEM part number	KCDPKDB	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPKDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse JA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C KDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C KDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
	Eaton aftermarket CDP retrofit kit (breaker + connector kit + mounting hardware + cover + instructions) to add a branch device to an existing Westinghouse CDP chassis; not for replacing or creating a main device; CDP standard widths 30, 38, 42, 48 in; required space must be available; also usable to add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Breaker compatibility	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A) with Series C KDB	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, JA, LB, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*KD onto existing LB connectors requires TAD3 adapter (included in KD retrofit kits).*		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00362	KCDPLD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C LD breaker retrofit kit (replaces Westinghouse LA, HLA)

OEM part number	KCDPLD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPLD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse LA, HLA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C LD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C LD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
	Eaton aftermarket CDP retrofit kit (breaker + connector kit + mounting hardware + cover + instructions) to add a branch device to an existing Westinghouse CDP chassis; not for replacing or creating a main device; CDP standard widths 30, 38, 42, 48 in; required space must be available; also usable to add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Breaker compatibility	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A) with Series C LD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Westinghouse pre-Series C industrial MCCBs, LA, LC, LD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00363	KCDPMDL	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C MDL breaker retrofit kit (replaces Westinghouse MA, HMA)

OEM part number	KCDPMDL	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPMDL (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse MA, HMA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C MDL breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C MDL breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
	Eaton aftermarket CDP retrofit kit (breaker + connector kit + mounting hardware + cover + instructions) to add a branch device to an existing Westinghouse CDP chassis; not for replacing or creating a main device; CDP standard widths 30, 38, 42, 48 in; required space must be available; also usable to add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Breaker compatibility	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A) with Series C MDL	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Westinghouse pre-Series C industrial MCCBs, MA, MC, MDL		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00364	KCDPND	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C ND breaker retrofit kit (replaces Westinghouse NB, HNB)

OEM part number	KCDPND	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPND (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse NB, HNB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C ND breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C ND breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
	Eaton aftermarket CDP retrofit kit (breaker + connector kit + mounting hardware + cover + instructions) to add a branch device to an existing Westinghouse CDP chassis; not for replacing or creating a main device; CDP standard widths 30, 38, 42, 48 in; required space must be available; also usable to add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Breaker compatibility	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 A) with Series C ND	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Westinghouse pre-Series C industrial MCCBs, NB, NC, ND		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

3.4 CHA-PM4 — Challenger distribution panelboards (PM4a / PM4b)

FAM-EAT-028 · panelboard · aka Challenger panelboard, PM4a, PM4b · markings: Challenger

Challenger Electrical Equipment (formed c.1981 from GTE-Sylvania's distribution business, Jackson MS) built distribution panelboards annotated 'PM4a' and 'PM4b' in relectric's catalogue. Mounting kits follow the pattern C<frame>D<n>K (twin) / C<frame>DS<n>K (single), with 'B' variants (e.g., CED4BK) annotated PM4b. Eaton-numbered KPRL4C*/KPRL4AC*/KPRL4BC* kits appear to adapt Challenger breakers into Pow-R-Line 4 style interiors. Coded EAT per lineage table.

Attribute	Value	Cl.	Sources
Status	Obsolete (Challenger acquired by Westinghouse late 1980s/1994; Eaton from 1994); kits available as surplus	C	S234, S224, S219 surplus
Branch breakers accepted	Challenger CA, CE?, CF, CJ, CK, CL, CM, CN frames (inferred from kit names CCA4K, CED*, CFD*, CJD*, CKD*, CLD*, CMD4K 800 A, CND4K 1200 A)	D	S234 inference

Breaker families associated: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)
Key documents: S219 Zinsco; S224 Challenger / GTE / Zinsco ownership discussion; S234 Challenger Breaker Parts & Accessories Catalog
Also fits this family (entry printed elsewhere): KPRL4CA, KPRL4JDS, KPRL4JDT, KPRL4KDS, KPRL4ND, KPRL4MD, KPRL4FD, KPRL4ED, KPRL4LD, BPRLFDCH, BPRLEDCH, BPRLCACH, BPRLJDTCH, BPRLJDSCH, BPRLKDSCH, BPRLLDCH, BPRLMDCH, BPRLNDCH

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00766	**CCA4K**	Challenger twin mounting hardware kit CCA4K, 225 A max, 240 V	—	discontinued; recertified/new-surplus
EDH-EAT-00767	**CED3K**	Challenger twin mounting hardware kit CED3K, 225 A max, 600 V	—	discontinued; recertified/new-surplus

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00769	**CED4BK**	Challenger twin (PM4b) mounting hardware kit CED4BK, 225 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00768	**CED4K**	Challenger twin mounting hardware kit CED4K, 225 A max, 240 V	—	discontinued; recertified/new-surplus
EDH-EAT-00770	**CFD3K**	Challenger twin mounting hardware kit CFD3K, 150 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00772	**CFD4BK**	Challenger twin mounting hardware kit CFD4BK, 150 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00771	**CFD4K**	Challenger twin mounting hardware kit CFD4K, 150 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00773	**CJD4K**	Challenger twin mounting hardware kit CJD4K, 250 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00775	**CJDS4BK**	Challenger single mounting hardware kit CJDS4BK, 250 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00774	**CJDS4K**	Challenger listed 'twin' (name suggests single) mounting hardware kit CJDS4K, 250 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00776	**CKD4K**	Challenger PM4a (no further description) mounting hardware kit CKD4K	—	discontinued; recertified/new-surplus
EDH-EAT-00778	**CKDS4BK**	Challenger single mounting hardware kit CKDS4BK, 400 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00777	**CKDS4K**	Challenger single mounting hardware kit CKDS4K, 400 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00779	**CLD4K**	Challenger single mounting hardware kit CLD4K, 600 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00780	**CLDS4BK**	Challenger single mounting hardware kit CLDS4BK, 600 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00781	**CMD4K**	Challenger single mounting hardware kit CMD4K, 800 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00782	**CND4K**	Challenger single mounting hardware kit CND4K, 1200 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00788	**KPRL3CF3**	Challenger twin mounting hardware kit KPRL3CF3, 150 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00784	**KPRL4CD**	Challenger twin mounting hardware kit KPRL4CD, 225 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00783	**KPRL4CED**	Challenger twin mounting hardware kit KPRL4CED, 225 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00785	**KPRL4CSL**	Challenger single mounting hardware kit KPRL4CSL, 600 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00786	**KPRL4CSM**	Challenger single mounting hardware kit KPRL4CSM, 800 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00787	**KPRL4CSN**	Challenger single mounting hardware kit KPRL4CSN, 1200 A max	—	discontinued; recertified/new-surplus

EDH-EAT-00766	**CCA4K**	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CCA4K, 225 A max, 240 V

OEM part number	CCA4K	C	S234 surplus
Description	Challenger twin mounting hardware kit CCA4K, 225 A max, 240 V	C	same as above
Current rating	225 A max, 240 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00767	CED3K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CED3K, 225 A max, 600 V

OEM part number	CED3K	C	S234 surplus
Description	Challenger twin mounting hardware kit CED3K, 225 A max, 600 V	C	same as above
Current rating	225 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00769	CED4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin (PM4b) mounting hardware kit CED4BK, 225 A max, 600 V

OEM part number	CED4BK	C	S234 surplus
Description	Challenger twin (PM4b) mounting hardware kit CED4BK, 225 A max, 600 V	C	same as above
Current rating	225 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00768	CED4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CED4K, 225 A max, 240 V

OEM part number	CED4K	C	S234 surplus
Description	Challenger twin mounting hardware kit CED4K, 225 A max, 240 V	C	same as above
Current rating	225 A max, 240 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00770	CFD3K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CFD3K, 150 A max, 600 V

OEM part number	CFD3K	C	S234 surplus
Description	Challenger twin mounting hardware kit CFD3K, 150 A max, 600 V	C	same as above
Current rating	150 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00772	CFD4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CFD4BK, 150 A max, 600 V

OEM part number	CFD4BK	C	S234 surplus
Description	Challenger twin mounting hardware kit CFD4BK, 150 A max, 600 V	C	same as above
Current rating	150 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00771	CFD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CFD4K, 150 A max, 600 V

OEM part number	CFD4K	C	S234 surplus
Description	Challenger twin mounting hardware kit CFD4K, 150 A max, 600 V	C	same as above
Current rating	150 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00773	CJD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CJD4K, 250 A max, 600 V

OEM part number	CJD4K	C	S234 surplus
Description	Challenger twin mounting hardware kit CJD4K, 250 A max, 600 V	C	same as above
Current rating	250 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00775	CJDS4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CJDS4BK, 250 A max, 600 V

OEM part number	CJDS4BK	C	S234 surplus
Description	Challenger single mounting hardware kit CJDS4BK, 250 A max, 600 V	C	same as above
Current rating	250 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00774	CJDS4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger listed 'twin' (name suggests single) mounting hardware kit CJDS4K, 250 A max, 600 V

OEM part number	CJDS4K	C	S234 surplus
Description	Challenger listed 'twin' (name suggests single) mounting hardware kit CJDS4K, 250 A max, 600 V	C	same as above
Current rating	250 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00776	CKD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger PM4a (no further description) mounting hardware kit CKD4K

OEM part number	CKD4K	C	S234 surplus
Description	Challenger PM4a (no further description) mounting hardware kit CKD4K	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00778	CKDS4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CKDS4BK, 400 A max, 600 V

OEM part number	CKDS4BK	C	S234 surplus
Description	Challenger single mounting hardware kit CKDS4BK, 400 A max, 600 V	C	same as above
Current rating	400 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00777	CKDS4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CKDS4K, 400 A max, 600 V

OEM part number	CKDS4K	C	S234 surplus
Description	Challenger single mounting hardware kit CKDS4K, 400 A max, 600 V	C	same as above
Current rating	400 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00779	CLD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CLD4K, 600 A max, 600 V

OEM part number	CLD4K	C	S234 surplus
Description	Challenger single mounting hardware kit CLD4K, 600 A max, 600 V	C	same as above
Current rating	600 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00780	CLDS4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CLDS4BK, 600 A max, 600 V

OEM part number	CLDS4BK	C	S234 surplus
Description	Challenger single mounting hardware kit CLDS4BK, 600 A max, 600 V	C	same as above
Current rating	600 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00781	CMD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CMD4K, 800 A max, 600 V

OEM part number	CMD4K	C	S234, S243 surplus
Description	Challenger single mounting hardware kit CMD4K, 800 A max, 600 V	C	same as above
Current rating	800 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00782	CND4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CND4K, 1200 A max, 600 V

OEM part number	CND4K	C	S234 surplus
Description	Challenger single mounting hardware kit CND4K, 1200 A max, 600 V	C	same as above
Current rating	1200 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00788	KPRL3CF3	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit KPRL3CF3, 150 A max

OEM part number	KPRL3CF3	C	S234 surplus
Description	Challenger twin mounting hardware kit KPRL3CF3, 150 A max	C	same as above
Current rating	150 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00784	KPRL4CD	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit KPRL4CD, 225 A max

OEM part number	KPRL4CD	C	S234 surplus
Description	Challenger twin mounting hardware kit KPRL4CD, 225 A max	C	same as above
Current rating	225 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00783	KPRL4CED	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit KPRL4CED, 225 A max

OEM part number	KPRL4CED	C	S234 surplus
Description	Challenger twin mounting hardware kit KPRL4CED, 225 A max	C	same as above
Current rating	225 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00785	KPRL4CSL	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit KPRL4CSL, 600 A max

OEM part number	KPRL4CSL	C	S234 surplus
Description	Challenger single mounting hardware kit KPRL4CSL, 600 A max	C	same as above
Current rating	600 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00786	KPRL4CSM	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit KPRL4CSM, 800 A max

OEM part number	KPRL4CSM	C	S234 surplus
Description	Challenger single mounting hardware kit KPRL4CSM, 800 A max	C	same as above
Current rating	800 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00787	KPRL4CSN	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit KPRL4CSN, 1200 A max

OEM part number	KPRL4CSN	C	S234 surplus
Description	Challenger single mounting hardware kit KPRL4CSN, 1200 A max	C	same as above
Current rating	1200 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

3.5 CHP/CHB — Cutler-Hammer CHP / CHB lighting panelboards

FAM-EAT-039 · panelboard · aka CH lighting panel, CHB panelboard, CHP · markings: Cutler-Hammer

Cutler-Hammer lighting panelboards named for their CH plug-on (CHP) or CHB bolt-on branch breakers; listed on the Vol 12 time line as 'Cutler-Hammer CHP/CHB' and illustrated as 'Cutler-Hammer CHB'. Replacement is a PRL1a interior that still accepts CH/CHB.

Attribute	Value	Cl.	Sources
Status	Out of production; connectors not available (note 2)	A	S440 V12-T4-4; oem_spec
Successor	Pow-R-Line 1a with CH (CHP) or CHB (CHB) breakers	A	same as above
Branch breakers accepted	CHP: Type CH plug-on; CHB: Type CHB bolt-on	A	same as above

Breaker families associated: Cutler-Hammer CH / CHB

Key documents: S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp

3.6 EE — Cutler-Hammer Type EE plug-in power panelboard / switchboard

FAM-EAT-037 · panelboard · aka Type EE · markings: Cutler-Hammer

Cutler-Hammer plug-in power panelboard (Eaton chart heading 'Plug-In Power Panelboards and Switchboards'). Double-bus 42/48 in wide interiors with 10 in gutters, neutral at top (may be at bottom) taking no X space; main device must be at neutral end of a double-bus panel. Mixes breaker modules and fusible switch units (30 A to 800 A) and 600-1200 A lug units. Successor is PRL5P.

Attribute	Value	Cl.	Sources
Status	Out of production; parts via RP01400003E	A	S440 V12-T4-13; oem_spec
Successor	Pow-R-Line 5P (PRL5P); FS->FD, FH->HFD, FL->FDC, JS->JD, JH->HJD, JL->JDC, KS->KD, KH->HKD, LS->LD, LH->HLD, LL->LDC, MS->MDL, NS->ND	A	S440 V12-T4-6; oem_spec
Main ampacity	1200 A maximum	A	S440 V12-T4-13; oem_spec
Branch breakers accepted	Plug-in modules for CC, CCH, CHH, FS, FH, FL, JS, JH, JL, KS, KH, LS, LH, LL, MS, MH, NS, NH breakers and 30-800 A fusible branch switches (240 V R&T fuse, 600 V T fuse)	A	same as above
Dimensions	42 in and 48 in wide double-bus interiors; 10 in gutters; 7 in side spaces; X = 1.38 in; some units usable in 30.00 in wide single-bus interiors	A	same as above
Neutral location	Neutral at top, no X space (may be at bottom)	A	same as above

Breaker families associated: Cutler-Hammer CC / CCH / CHH

Key documents: S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp; S442 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,; S444 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00945	**EEEHD220015SB2**	Type EE2 circuit breaker plug-on unit for EP panelboard / ES switchboard (numbering example: EHD 2-pole 240 V 15 A single branch)	100 A frame: EHD, FDB, FD, HFD, FDC (3X, 4.13 in); 225 A: FDB, FD, HFD **A**	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00900	**EEMODULEFS**	Cutler-Hammer EE panelboard mounting module for FS-frame breaker	FS **C**	Discontinued OEM item traded new-surplus / recertified by de

EDH-EAT-00945 **EEEHD220015SB2** Cutler-Hammer breaker-mounting-kit **LISTED AS AN ORDERABLE**

Type EE2 circuit breaker plug-on unit for EP panelboard / ES switchboard (numbering example: EHD 2-pole 240 V 15 A single branch)

OEM part number	EEEHD220015SB2	**A**	S442 oem_spec
Description	EE2 plug-on unit = complete assembly of one circuit breaker mounted to a plug-on adapter, plus breaker cover plate, hardware and instructions. Catalog number: EE + breaker type + phasing (2=AC, 3=ABC, 4=ABL or BCR, 5=BCL or ABR) + volts (1=120,2=240,3=277/300,4=480,6=600) + amperes (4 digits) + mounting (T twin / S single) + unit type (M main, B branch, C combination) + model 2 (EP panelboard or ES switchboard). Table 15 example: EE EHD 2 2 0015 S B 2. (Concatenated example built from Table 15 graphic; Eaton does not print the joined string)	**A**	S442 p.14 Tables 14-15; oem_spec
Breaker compatibility	100 A frame: EHD, FDB, FD, HFD, FDC (3X, 4.13 in); 225 A: FDB, FD, HFD, FDC, ED, EDH, EDC, JD, HJD, JDC (3X); 250 A: JD, HJD, JDC (3X); 400 A: KD, HKD, KDC (4X, 5.50 in); LCL 125-400 A (6X, 8.25 in); 600 A: LD, HLD, LDC (6X)	**A**	S442 p.14 Table 14; oem_spec
Dimensions	Space: 3X = 4.13 in (104.9 mm); 4X = 5.50 in (139.7 mm); 6X = 8.25 in (209.6 mm); 1X = 1.38 in (35.1 mm)	**A**	S442 p.12, p.14; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Fusible switch units are not available (replace with circuit breaker units).	**A**	S442 p.12; oem_spec
Cross-links	Families: EE, EP, ES · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	OEM instruction document, Material		
Open question	*Single "S" units mount in single or double bus; "T" units double bus only.*		

EDH-EAT-00900 **EEMODULEFS** Cutler-Hammer breaker-mounting-kit **DISCONTINUED OEM ITEM**

Cutler-Hammer EE panelboard mounting module for FS-frame breaker

OEM part number	EEMODULEFS	**C**	S444 surplus_listing
Description	EE Mounting Module for FS frame breaker	**C**	same as above
Installation location	Cutler-Hammer EE plug-in power panelboard	**C**	same as above
Breaker compatibility	FS	**C**	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	**C**	same as above
Cross-links	Families: EE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00965	**EEFBP10T2**	Type EE2 breaker filler plate 10X (full-width)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00960	**EEFBP6T2**	Type EE2 breaker filler plate 6X (full-width)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00966	**EEFPB12T2**	Type EE2 breaker filler plate 12X (full-width)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00946	**EEFPB1S1**	Type EE2 breaker filler plate 1X (single-width)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00948	**EEFPB2S1**	Type EE2 breaker filler plate 2X (single-width)	—	Listed as an orderable renewal part from the Eaton Panelboar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00950	**EEFPB2S2N**	Type EE2 breaker filler plate 2X (single-width blank bus cover and trim filler across from breakers for six-disconnect-rule)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00949	**EEFPB2S2W**	Type EE2 breaker filler plate 2X (single-width blank wireway covering bus across from a dual-mount adapter kit; also opposite breakers with accessories)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00947	**EEFPB2T2**	Type EE2 breaker filler plate 2X (full-width)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00952	**EEFPB3S2N**	Type EE2 breaker filler plate 3X (single-width blank bus cover and trim filler)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00951	**EEFPB3S2W**	Type EE2 breaker filler plate 3X (single-width blank wireway)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00954	**EEFPB4S1**	Type EE2 breaker filler plate 4X (single-width)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00956	**EEFPB4S2N**	Type EE2 breaker filler plate 4X (single-width bus cover and trim filler)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00955	**EEFPB4S2W**	Type EE2 breaker filler plate 4X (single-width blank wireway)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00953	**EEFPB4T2**	Type EE2 breaker filler plate 4X (full-width)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00957	**EEFPB5S1**	Type EE2 breaker filler plate 5X (single-width)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00959	**EEFPB5S2N**	Type EE2 breaker filler plate 5X (single-width bus cover and trim filler)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00958	**EEFPB5S2W**	Type EE2 breaker filler plate 5X (single-width blank wireway)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00961	**EEFPB6S1**	Type EE2 breaker filler plate 6X (single-width)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00963	**EEFPB6S2N**	Type EE2 breaker filler plate 6X (single-width bus cover and trim filler)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00962	**EEFPB6S2W**	Type EE2 breaker filler plate 6X (single-width blank wireway)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00964	**EEFPB8T2**	Type EE2 breaker filler plate 8X (full-width)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00967	**EEFPS1S2**	Type EE2 fusible switch filler plate 1X, across from single-width fusible switches in double-bus panels	—	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00965 **EEFBP10T2** Cutler-Hammer filler-plate **LISTED AS AN ORDERABLE**

Type EE2 breaker filler plate 10X (full-width)

OEM part number	EEFBP10T2	**A**	S442 oem_spec
Alternate / superseded numbers	EEFPB10T2 (Probable correct spelling; printed EEFBP in Table 17)	**D**	S442 alias; inference
Description	Type EE2 breaker filler plate, 10X (1X = 1.38 in / 35.1 mm): full-width, double-bus 42/48 in enclosures (printed "EEFBP10T2"; pattern suggests EEFPB10T2)	**A**	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	**A**	S442 p.16; oem_spec
Dimensions	10X high (1X = 1.38 in)	**A**	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	**A**	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00960	EEFBP6T2	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 6X (full-width)

OEM part number	EEFBP6T2	A	S442 oem_spec
Alternate / superseded numbers	EEFPB6T2 (Probable correct spelling; printed EEFBP in Table 17)	D	S442 alias; inference
Description	Type EE2 breaker filler plate, 6X (1X = 1.38 in / 35.1 mm): full-width, double-bus 42/48 in enclosures (printed "EEFBP6T2"; pattern suggests EEFPB6T2)	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	6X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00966	EEFPB12T2	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 12X (full-width)

OEM part number	EEFPB12T2	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 12X (1X = 1.38 in / 35.1 mm): full-width, double-bus 42/48 in enclosures	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	12X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00946	EEFPB1S1	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 1X (single-width)

OEM part number	EEFPB1S1	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 1X (1X = 1.38 in / 35.1 mm): single-width, single-bus interiors / across from breakers in wide panels	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	1X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00948	EEFPB2S1	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 2X (single-width)

OEM part number	EEFPB2S1	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 2X (1X = 1.38 in / 35.1 mm): single-width, single-bus interiors / across from breakers in wide panels	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	2X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00950	EEFPB2S2N	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 2X (single-width blank bus cover and trim filler across from breakers for six-disconnect-rule)

OEM part number	EEFPB2S2N	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 2X (1X = 1.38 in / 35.1 mm): single-width blank bus cover and trim filler across from breakers for six-disconnect-rule (SUSE) applications	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	2X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00949	EEFPB2S2W	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 2X (single-width blank wireway covering bus across from a dual-mount adapter kit; also opposite breakers with accessories)

OEM part number	EEFPB2S2W	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 2X (1X = 1.38 in / 35.1 mm): single-width blank wireway covering bus across from a dual-mount adapter kit; also opposite breakers with accessories	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	2X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00947	EEFPB2T2	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 2X (full-width)

OEM part number	EEFPB2T2	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 2X (1X = 1.38 in / 35.1 mm): full-width, double-bus interiors in 42.00 in and 48.00 in wide enclosures (2X = 1X covering left and right)	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	2X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00952	EEFPB3S2N	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 3X (single-width blank bus cover and trim filler)

OEM part number	EEFPB3S2N	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 3X (1X = 1.38 in / 35.1 mm): single-width blank bus cover and trim filler (SUSE)	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	3X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00951	EEFPB3S2W	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 3X (single-width blank wireway)

OEM part number	EEFPB3S2W	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 3X (1X = 1.38 in / 35.1 mm): single-width blank wireway (dual-mount adapter / accessories)	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	3X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00954	EEFPB4S1	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 4X (single-width)

OEM part number	EEFPB4S1	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 4X (1X = 1.38 in / 35.1 mm): single-width, single-bus	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	4X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00956	EEFPB4S2N	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 4X (single-width bus cover and trim filler)

OEM part number	EEFPB4S2N	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 4X (1X = 1.38 in / 35.1 mm): single-width bus cover and trim filler (SUSE)	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	4X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00955	EEFPB4S2W	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 4X (single-width blank wireway)

OEM part number	EEFPB4S2W	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 4X (1X = 1.38 in / 35.1 mm): single-width blank wireway	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	4X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00953	EEFPB4T2	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 4X (full-width)

OEM part number	EEFPB4T2	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 4X (1X = 1.38 in / 35.1 mm): full-width, double-bus 42/48 in enclosures	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	4X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00957	EEFPB5S1	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 5X (single-width)

OEM part number	EEFPB5S1	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 5X (1X = 1.38 in / 35.1 mm): single-width, single-bus	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	5X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00959	EEFPB5S2N	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 5X (single-width bus cover and trim filler)

OEM part number	EEFPB5S2N	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 5X (1X = 1.38 in / 35.1 mm): single-width bus cover and trim filler (SUSE)	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	5X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00958	EEFPB5S2W	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 5X (single-width blank wireway)

OEM part number	EEFPB5S2W	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 5X (1X = 1.38 in / 35.1 mm): single-width blank wireway	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	5X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00961	EEFPB6S1	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 6X (single-width)

OEM part number	EEFPB6S1	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 6X (1X = 1.38 in / 35.1 mm): single-width, single-bus	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	6X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00963	EEFPB6S2N	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 6X (single-width bus cover and trim filler)

OEM part number	EEFPB6S2N	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 6X (1X = 1.38 in / 35.1 mm): single-width bus cover and trim filler (SUSE)	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	6X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00962	EEFPB6S2W	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 6X (single-width blank wireway)

OEM part number	EEFPB6S2W	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 6X (1X = 1.38 in / 35.1 mm): single-width blank wireway	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	6X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00964	EEFPB8T2	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 breaker filler plate 8X (full-width)

OEM part number	EEFPB8T2	A	S442 oem_spec
Description	Type EE2 breaker filler plate, 8X (1X = 1.38 in / 35.1 mm): full-width, double-bus 42/48 in enclosures	A	S442 p.16 Table 17; oem_spec
Installation location	EP panelboard / ES switchboard EE2 plug-on interior, unused X space	A	S442 p.16; oem_spec
Dimensions	8X high (1X = 1.38 in)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: EE, EP, ES		
Not yet documented	Finish / plating, Material		

EDH-EAT-00967	EEFPS1S2	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type EE2 fusible switch filler plate 1X, across from single-width fusible switches in double-bus panels

OEM part number	EEFPS1S2	A	S442 oem_spec
Description	Type EE2 fusible switch filler plate 1X for use across from single-width fusible switches in double bus panels (only entry printed in Table 18)	A	S442 p.16 Table 18; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.16; oem_spec
Cross-links	Families: EE, EP, ES		
Not yet documented	Dimensions, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00901	**EELD36600SB2**	LD3600 breaker with Cutler-Hammer EE hardware kit	LD 3-pole 600 A (LD3600) C	Discontinued OEM item traded new-surplus / recertified by de

EDH-EAT-00901	EELD36600SB2	Cutler-Hammer	conversion-kit	DISCONTINUED OEM ITEM

LD3600 breaker with Cutler-Hammer EE hardware kit

OEM part number	EELD36600SB2	C	S444 surplus_listing
Description	LD3600 Breaker with EE Hardware Kit	C	same as above
Installation location	Cutler-Hammer EE panelboard (LS/LH position; Eaton chart maps LS->LD)	C	same as above
Breaker compatibility	LD 3-pole 600 A (LD3600)	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Replacement / successor	Eaton chart: EE LS / LS(A) / LS(E) / LS(B) -> PRL5P LD	A	S440 V12-T4-6; oem_spec
Cross-links	Families: EE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

3.7 EP — Cutler-Hammer Type EP plug-in power panelboard

FAM-EAT-038 · panelboard · aka Type EP · markings: Cutler-Hammer

Breaker-only sibling of EE: 42/48 in wide double-bus interior, 10 in gutters, neutral top or bottom with no X space. Blank wireway fillers are required opposite any dual breaker unit or adapter; main device at neutral end of double-bus panel.

Attribute	Value	Cl.	Sources
Status	Out of production; parts via RP01400003E	A	S440 V12-T4-14; oem_spec
Successor	Pow-R-Line 5P (PRL5P)	A	S440 V12-T4-6; oem_spec
Main ampacity	1200 A maximum	A	S440 V12-T4-14; oem_spec
Branch breakers accepted	FS, FH, FL, CC, CCH, CHH (2X/3X), JS, JH, JL (3X), LSB, LHB, LLB, LC (6X), MS, MH, MC, HMC 800 A (6X/12X), NS, NH, NC, HNC 1200 A (6X/12X)	A	same as above
Layout rules	Blank wireway fillers required opposite any dual breaker unit or adapter; some units usable in 30.00 in wide single-bus interiors; main device at neutral end	A	same as above
Ed dual plug on units	Type ED dual plug-on units (one or two 3-pole EHD/FDB/FD/HFD/FDC 15-225 A or ED/EDH/EDC 100-225 A breakers on one adapter, 3X, with cover plate, hardware, instructions) are ordered by description, not catalog number; a blank wireway filler plate is required when mounted in a double bus panel.	A	S442 p.15 Table 16; oem_spec
Identification	EP/ES: 30.00, 42.00 or 48.00 in wide enclosures; up to 1200 A main breaker or 800 A main fusible switch or 1200 A MLO; breakers/switches without metal side flanges; breaker covers attached to the trim. 1X = 1.38 in. Box heights 64/75/86 in (24X-80X).	A	S442 p.3 Table 1; p.13 Table 13; oem_spec

Breaker families associated: Cutler-Hammer CC / CCH / CHH

Key documents: S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp; S442 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,

Also fits this family (entry printed elsewhere): TAD3, 1A32258H03, K80522, K80133, K80429, EEEHD220015SB2, EEFPB1S1, EEFPB2T2, EEFPB2S1, EEFPB2S2W, EEFPB2S2N, EEFPB3S2W, EEFPB3S2N, EEFPB4T2, EEFPB4S1, EEFPB4S2W, EEFPB4S2N, EEFPB5S1, EEFPB5S2W, EEFPB5S2N, EEFBP6T2, EEFPB6S1, EEFPB6S2W, EEFPB6S2N, EEFPB8T2, EEFBP10T2, EEFPB12T2, EEFPS1S2, 52-2751

3.8 FDP — Westinghouse FDP fusible distribution panelboard

FAM-EAT-014 · panelboard · aka FDP, Westinghouse FDP · markings: Westinghouse

Westinghouse fusible distribution panelboard (30-50 in wide). FDPW/FDPB switch connector kits KFDP* require 3.50 in bus spacing.

Westinghouse fusible distribution panelboard sharing CDP chassis geometry (3.50 in phase centers, 19.50 in rails). FDPW/FDPB switch connector kits fit only 3.50 in bus spacing; if bus spacing is 4.25 in no parts are available. Circuit breakers can be added to an FDP via a 'picture frame' transition (+2X).

Evidence-only record for the existing FDP family: 1957 ratings, and Eaton note that FDP retrofit kits fit only 3.50 in phase-to-phase vertical bus spacing - at 4.25 in spacing 'these retrofit kits will not fit and no parts are available'; 400-1200 A FDP connectors are not compatible with FDPW switches.

Attribute	Value	Cl.	Sources
Status	Obsolete; switch retrofit/connector kits available	A	S5 oem_spec
	discontinued; replacement panelboard type PRL4F	A	S13 p. V12-T4-7; oem_spec
Era of manufacture	Vintage Westinghouse	C	S5 inference
Successor	PRL4F	A	S13 p. V12-T4-7; oem_spec
	PRL4F (functional)	D	S5 inference
Voltage rating	Up to 600 V AC, 250 V DC	A	S454 oem_spec
Main ampacity	1600 A maximum	A	S13 p. V12-T4-10; oem_spec
	1957: main lugs up to 1200 A, main switches up to 600 A; branch 30-600 A De-ion fusible switch units	A	S454 ECM June 1957 p.189; oem_spec
Branch breakers accepted	FDPW / FDPB fusible switches 30-1200 A (retrofit); breakers via 'picture frame' adapter (+2X)	A	S5 pp.17-18; oem_spec
	FDP fusible switches 30-1200 A; current replacements FDPW (30-100 A twin, 400-1200 A) and FDPB (200 A) switches via KFDP connector/retrofit kits	A	S14 pp. 17-18; oem_spec
Bus spacing limit	Vertical bus bars must be 3.50 in center-line phase to phase; if 4.25 in, switches will not fit and no parts are available	A	S14 p. 17; oem_spec
Breaker in fdp	To install circuit breakers in an FDP panel a 'picture frame' is required; add 2X to breaker size for the transition (contact Sumter)	A	S14 p. 18; oem_spec
Layout	Main lug section 5X 225 A, 8X 250-400 A, 9X 600 A, 12X 800-1600 A; switches 30/60/100 A 4X, 100 A 600 V 5X, 200 A 6X, 400/600 A 11X, 800/1200 A 16X horizontal or 21X vertical	A	S13 p. V12-T4-10; oem_spec
Identification features	Measure vertical bus phase spacing: 3.50 in = kit-compatible; 4.25 in = no kits/parts	A	S441 oem_web
Fdpw note	400A, 600A, 800A, 1200A FDP connectors are NOT compatible with FDPW switches	A	S440 V12-T4-8 note 6; oem_spec

Key documents: S5 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD; S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp; S441 Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page; S454 sim_ecm_1957-06_56_6 Electrical Construction and Maintenance, Vol 56 No 6, June 1957 - Westinghouse distributio
Also fits this family (entry printed elsewhere): KFDP4XT, KFDP5XT, KFDPB6X-2, KFDPW9X-4, KFDPW11X-6, KFDPW11X-8, KFDPW15X-12, 5155C81G01, K80522, 8450C62H39, 114C247G01, 3457B16G01, 414A380G02, 0080429, FDPWT3211R, FDPWT3611R, FDPWT3222R, FDPWT3622R, FDPWT3233R, FDPWT3633R, FDPBS324R, FDPBS364R, FDPBT3244R, FDPBT3644R, FDPW325R, FDPW365R, FDPW326R, FDPW366R, FDPW327, FDPW367, FDPW328, FDPW368

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00373	**KFDP_X**	FDP filler cover (any X increment)	—	Listed Feb 2013

EDH-EAT-00373	KFDP_X	Westinghouse	filler-plate	LISTED FEB 2013

FDP filler cover (any X increment)

OEM part number	KFDP_X	A	S5 p.17; oem_spec
	KFDP_X (fill in size)	A	S14 p. 17 'FDP filler covers'; oem_spec
Description	FDP filler covers in any 1X (1.38 in) increment; catalog KFDP_X; includes cover, mounting brackets and hardware	A	S5 oem_spec
	FDP filler cover available in any 1X (1.38 in / 35.1 mm) increment; includes cover, mounting brackets and hardware	A	S14 p. 17; oem_spec
Kit contents	Cover, mounting brackets, hardware	A	same as above
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: FDP		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00430	**KFDPBS324R**	FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00431	**KFDPBS364R**	FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00432	**KFDPW325R**	FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00434	**KFDPW326R**	FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00433	**KFDPW365R**	FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00435	**KFDPW366R**	FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00436	**KFDPW367**	FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)	—	unknown
EDH-EAT-00437	**KFDPW368**	FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)	—	unknown
EDH-EAT-00424	**KFDPWT3211R**	FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00426	**KFDPWT3222R**	FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00428	**KFDPWT3233R**	FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00425	**KFDPWT3611R**	FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00427	**KFDPWT3622R**	FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00429	**KFDPWT3633R**	FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)	—	unknown

EDH-EAT-00430	KFDPBS324R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)

OEM part number	KFDPBS324R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	6X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00431	KFDPBS364R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)

OEM part number	KFDPBS364R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	6X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00432	KFDPW325R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)

OEM part number	KFDPW325R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	400 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	9X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00434	KFDPW326R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)

OEM part number	KFDPW326R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	600 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	11X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00433	KFDPW365R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)

OEM part number	KFDPW365R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	400 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	9X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00435	KFDPW366R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)

OEM part number	KFDPW366R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	600 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	11X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00436	KFDPW367	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)

OEM part number	KFDPW367	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	240/600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	800 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	11X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00437	KFDPW368	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)

OEM part number	KFDPW368	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	240/600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	1200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	15X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00424	KFDPWT3211R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)

OEM part number	KFDPWT3211R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	30 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00426	KFDPWT3222R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)

OEM part number	KFDPWT3222R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	60 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00428	KFDPWT3233R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)

OEM part number	KFDPWT3233R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	100 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00425	KFDPWT3611R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)

OEM part number	KFDPWT3611R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	30 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00427	KFDPWT3622R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)

OEM part number	KFDPWT3622R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	60 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00429	KFDPWT3633R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)

OEM part number	KFDPWT3633R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
	Eaton aftermarket FDP retrofit kit (adds a fusible-switch branch device to an existing Westinghouse FDP chassis; one 3-pole switch single or twin, fuses not included). Requires vertical busbar centreline spacing 3.50 in phase-to-phase; at 4.25 in spacing the kits will not fit and no parts are available. Not for replacing or creating a main device. FDP standard widths 30, 38, 42 in. CDP/FDP kits may also add chassis-mounted devices to WF group-mounted switchboards. Non-listed arrangements: Sumter Plant Aftermarket Center.	A	S441 Panelboard Aftermarket help page; oem_spec
Poles	3	A	S14 p. 17; oem_spec
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	100 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	5X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

3.9 MP100 — Cutler-Hammer MP100 fusible distribution panelboard

FAM-EAT-033 · panelboard · aka MP-100 · markings: Cutler-Hammer

Cutler-Hammer fusible-switch counterpart of MP40 using M50 fusible switch units. Eaton lists MP100 fusible switch kits (one 3-pole single or twin switch + connector kit + hardware + instructions, fuses not included) that also add devices to MP2 group-mounted switchboards. Trim locks for MP100, MP2 and M50 appear in RP01400003E (per search snippet).

Attribute	Value	Cl.	Sources
Status	Out of production; parts from Sumter SC Aftermarket Center	A	S440, S441 oem_spec
Era of manufacture	Shown on the Vol 12 time line together with MP40 (MP40/MP100)	B	S440 V12-T4-3; oem_spec
Successor	Pow-R-Line 4F (PRL4F); MP100 'M50 fusible switch' maps to PRL4F M50 fusible switch	A	S440 V12-T4-5; oem_spec
Branch breakers accepted	M50 fusible switches	A	same as above
Kit compatibility	MP100 fusible switch kits can add chassis-mounted devices to MP2 group-mounted switchboards	A	S441 oem_web

Key documents: S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp; S441 Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page; S442 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00994	**MP100FC-_X**	MP100 filler cover, any 1X increment (MP100FC-_X)	—	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00994 **MP100FC-_X** Cutler-Hammer filler-plate **LISTED AS AN ORDERABLE**

MP100 filler cover, any 1X increment (MP100FC-_X)

OEM part number	MP100FC-_X	A	S442 oem_spec
Description	MP100 filler covers in any increment of 1X = 1.38 in (35.1 mm); catalog number MP100FC-_X (fill in size). Includes cover, mounting brackets and hardware.	A	S442 p.22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: MP100, MP2		
Not yet documented	Material		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00984	**M50ASB324R**	MP100 / MP2 M50 fusible switch retrofit kit, 200 A, 250 V, single mount (6X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00985	**M50ASB364R**	MP100 / MP2 M50 fusible switch retrofit kit, 200 A, 600 V, single mount (6X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00986	**M50ASW325R**	MP100 / MP2 M50 fusible switch retrofit kit, 400 A, 250 V, single mount (9X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00988	**M50ASW326R**	MP100 / MP2 M50 fusible switch retrofit kit, 600 A, 250 V, single mount (11X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00987	**M50ASW365R**	MP100 / MP2 M50 fusible switch retrofit kit, 400 A, 600 V, single mount (9X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00989	**M50ASW366R**	MP100 / MP2 M50 fusible switch retrofit kit, 600 A, 600 V, single mount (11X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00991	**M50ASW367B**	MP100 / MP2 M50 fusible switch retrofit kit, 800 A, 600 V (bottom mounted), single mount (18X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00990	**M50ASW367T**	MP100 / MP2 M50 fusible switch retrofit kit, 800 A, 600 V (top mounted), single mount (18X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00993	**M50ASW368B**	MP100 / MP2 M50 fusible switch retrofit kit, 1200 A, 600 V (bottom mounted), single mount (19X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00992	**M50ASW368T**	MP100 / MP2 M50 fusible switch retrofit kit, 1200 A, 600 V (top mounted), single mount (19X)	—	Listed as an orderable renewal part from the Eaton Panelboar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00978	**M50ATW3211R**	MP100 / MP2 M50 fusible switch retrofit kit, 30/30 A, 250 V, twin mount (4X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00980	**M50ATW3222R**	MP100 / MP2 M50 fusible switch retrofit kit, 60/60 A, 250 V, twin mount (4X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00982	**M50ATW3233R**	MP100 / MP2 M50 fusible switch retrofit kit, 100/100 A, 250 V, twin mount (4X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00979	**M50ATW3611R**	MP100 / MP2 M50 fusible switch retrofit kit, 30/30 A, 600 V, twin mount (4X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00981	**M50ATW3622R**	MP100 / MP2 M50 fusible switch retrofit kit, 60/60 A, 600 V, twin mount (4X)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00983	**M50ATW3633R**	MP100 / MP2 M50 fusible switch retrofit kit, 100/100 A, 600 V, twin mount (5X)	—	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00984 **M50ASB324R** Cutler-Hammer switch-unit **LISTED AS AN ORDERABLE**

MP100 / MP2 M50 fusible switch retrofit kit, 200 A, 250 V, single mount (6X)

OEM part number	M50ASB324R	**A**	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 200 A, 250 V, single mounting, 6X (8.25 in (209.6 mm)). Designed for rejection-type (Class R) fuses. Fuses not included. Branch use only (mains via Sumter).	**A**	S442 p.22 Table 23; oem_spec
Application	branch	**A**	S442 p.22; oem_spec
Voltage rating	250 V	**A**	S442 p.22 Table 23; oem_spec
Current rating	200 A	**A**	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	**A**	S442 p.22; oem_spec
Dimensions	Occupies 6X = 8.25 in (209.6 mm)	**A**	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	**A**	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00985 **M50ASB364R** Cutler-Hammer switch-unit **LISTED AS AN ORDERABLE**

MP100 / MP2 M50 fusible switch retrofit kit, 200 A, 600 V, single mount (6X)

OEM part number	M50ASB364R	**A**	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 200 A, 600 V, single mounting, 6X (8.25 in (209.6 mm)). Designed for rejection-type (Class R) fuses. Fuses not included. Branch use only (mains via Sumter).	**A**	S442 p.22 Table 23; oem_spec
Application	branch	**A**	S442 p.22; oem_spec
Voltage rating	600 V	**A**	S442 p.22 Table 23; oem_spec
Current rating	200 A	**A**	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	**A**	S442 p.22; oem_spec
Dimensions	Occupies 6X = 8.25 in (209.6 mm)	**A**	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	**A**	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00986	M50ASW325R	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 400 A, 250 V, single mount (9X)

OEM part number	M50ASW325R	A	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 400 A, 250 V, single mounting, 9X (12.38 in (314.5 mm)). Designed for rejection-type (Class R) fuses. Fuses not included. Branch use only (mains via Sumter).	A	S442 p.22 Table 23; oem_spec
Application	branch	A	S442 p.22; oem_spec
Voltage rating	250 V	A	S442 p.22 Table 23; oem_spec
Current rating	400 A	A	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	A	S442 p.22; oem_spec
Dimensions	Occupies 9X = 12.38 in (314.5 mm)	A	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00988	M50ASW326R	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 600 A, 250 V, single mount (11X)

OEM part number	M50ASW326R	A	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 600 A, 250 V, single mounting, 11X (15.13 in (384.3 mm)). Designed for rejection-type (Class R) fuses. Fuses not included. Branch use only (mains via Sumter).	A	S442 p.22 Table 23; oem_spec
Application	branch	A	S442 p.22; oem_spec
Voltage rating	250 V	A	S442 p.22 Table 23; oem_spec
Current rating	600 A	A	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	A	S442 p.22; oem_spec
Dimensions	Occupies 11X = 15.13 in (384.3 mm)	A	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00987	M50ASW365R	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 400 A, 600 V, single mount (9X)

OEM part number	M50ASW365R	A	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 400 A, 600 V, single mounting, 9X (12.38 in (314.5 mm)). Designed for rejection-type (Class R) fuses. Fuses not included. Branch use only (mains via Sumter).	A	S442 p.22 Table 23; oem_spec
Application	branch	A	S442 p.22; oem_spec
Voltage rating	600 V	A	S442 p.22 Table 23; oem_spec
Current rating	400 A	A	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	A	S442 p.22; oem_spec
Dimensions	Occupies 9X = 12.38 in (314.5 mm)	A	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00989	M50ASW366R	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 600 A, 600 V, single mount (11X)

OEM part number	M50ASW366R	A	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 600 A, 600 V, single mounting, 11X (15.13 in (384.3 mm)). Designed for rejection-type (Class R) fuses. Fuses not included. Branch use only (mains via Sumter).	A	S442 p.22 Table 23; oem_spec
Application	branch	A	S442 p.22; oem_spec
Voltage rating	600 V	A	S442 p.22 Table 23; oem_spec
Current rating	600 A	A	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	A	S442 p.22; oem_spec
Dimensions	Occupies 11X = 15.13 in (384.3 mm)	A	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00991	M50ASW367B	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 800 A, 600 V (bottom mounted), single mount (18X)

OEM part number	M50ASW367B	A	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 800 A, 600 V (bottom mounted), single mounting, 18X (24.75 in (628.7 mm)). Designed for Class L fuses (800/1200 A); must be vertically mounted at top or bottom of panel. Fuses not included. Branch use only (mains via Sumter). (Printed as M50ASW367_ with T (top) or B (bottom) to be entered)	A	S442 p.22 Table 23; oem_spec
Application	branch	A	S442 p.22; oem_spec
Voltage rating	600 V (bottom mounted)	A	S442 p.22 Table 23; oem_spec
Current rating	800 A	A	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	A	S442 p.22; oem_spec
Dimensions	Occupies 18X = 24.75 in (628.7 mm)	A	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00990	M50ASW367T	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 800 A, 600 V (top mounted), single mount (18X)

OEM part number	M50ASW367T	**A**	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 800 A, 600 V (top mounted), single mounting, 18X (24.75 in (628.7 mm)). Designed for Class L fuses (800/1200 A); must be vertically mounted at top or bottom of panel. Fuses not included. Branch use only (mains via Sumter). (Printed as M50ASW367_ with T (top) or B (bottom) to be entered)	**A**	S442 p.22 Table 23; oem_spec
Application	branch	**A**	S442 p.22; oem_spec
Voltage rating	600 V (top mounted)	**A**	S442 p.22 Table 23; oem_spec
Current rating	800 A	**A**	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	**A**	S442 p.22; oem_spec
Dimensions	Occupies 18X = 24.75 in (628.7 mm)	**A**	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	**A**	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00993	M50ASW368B	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 1200 A, 600 V (bottom mounted), single mount (19X)

OEM part number	M50ASW368B	**A**	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 1200 A, 600 V (bottom mounted), single mounting, 19X (26.13 in (663.7 mm)). Designed for Class L fuses (800/1200 A); must be vertically mounted at top or bottom of panel. Fuses not included. Branch use only (mains via Sumter). (Printed as M50ASW368_ with T (top) or B (bottom) to be entered)	**A**	S442 p.22 Table 23; oem_spec
Application	branch	**A**	S442 p.22; oem_spec
Voltage rating	600 V (bottom mounted)	**A**	S442 p.22 Table 23; oem_spec
Current rating	1200 A	**A**	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	**A**	S442 p.22; oem_spec
Dimensions	Occupies 19X = 26.13 in (663.7 mm)	**A**	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	**A**	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00992	M50ASW368T	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 1200 A, 600 V (top mounted), single mount (19X)

OEM part number	M50ASW368T	A	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 1200 A, 600 V (top mounted), single mounting, 19X (26.13 in (663.7 mm)). Designed for Class L fuses (800/1200 A); must be vertically mounted at top or bottom of panel. Fuses not included. Branch use only (mains via Sumter). (Printed as M50ASW368_ with T (top) or B (bottom) to be entered)	A	S442 p.22 Table 23; oem_spec
Application	branch	A	S442 p.22; oem_spec
Voltage rating	600 V (top mounted)	A	S442 p.22 Table 23; oem_spec
Current rating	1200 A	A	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	A	S442 p.22; oem_spec
Dimensions	Occupies 19X = 26.13 in (663.7 mm)	A	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00978	M50ATW3211R	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 30/30 A, 250 V, twin mount (4X)

OEM part number	M50ATW3211R	A	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 30/30 A, 250 V, twin mounting, 4X (5.50 in (139.7 mm)). Designed for rejection-type (Class R) fuses. Fuses not included. Branch use only (mains via Sumter).	A	S442 p.22 Table 23; oem_spec
Application	branch	A	S442 p.22; oem_spec
Voltage rating	250 V	A	S442 p.22 Table 23; oem_spec
Current rating	30/30 A	A	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	A	S442 p.22; oem_spec
Dimensions	Occupies 4X = 5.50 in (139.7 mm)	A	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00980	M50ATW3222R	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 60/60 A, 250 V, twin mount (4X)

OEM part number	M50ATW3222R	A	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 60/60 A, 250 V, twin mounting, 4X (5.50 in (139.7 mm)). Designed for rejection-type (Class R) fuses. Fuses not included. Branch use only (mains via Sumter).	A	S442 p.22 Table 23; oem_spec
Application	branch	A	S442 p.22; oem_spec
Voltage rating	250 V	A	S442 p.22 Table 23; oem_spec
Current rating	60/60 A	A	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	A	S442 p.22; oem_spec
Dimensions	Occupies 4X = 5.50 in (139.7 mm)	A	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00982	M50ATW3233R	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 100/100 A, 250 V, twin mount (4X)

OEM part number	M50ATW3233R	A	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 100/100 A, 250 V, twin mounting, 4X (5.50 in (139.7 mm)). Designed for rejection-type (Class R) fuses. Fuses not included. Branch use only (mains via Sumter).	A	S442 p.22 Table 23; oem_spec
Application	branch	A	S442 p.22; oem_spec
Voltage rating	250 V	A	S442 p.22 Table 23; oem_spec
Current rating	100/100 A	A	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	A	S442 p.22; oem_spec
Dimensions	Occupies 4X = 5.50 in (139.7 mm)	A	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00979	M50ATW3611R	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 30/30 A, 600 V, twin mount (4X)

OEM part number	M50ATW3611R	A	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 30/30 A, 600 V, twin mounting, 4X (5.50 in (139.7 mm)). Designed for rejection-type (Class R) fuses. Fuses not included. Branch use only (mains via Sumter).	A	S442 p.22 Table 23; oem_spec
Application	branch	A	S442 p.22; oem_spec
Voltage rating	600 V	A	S442 p.22 Table 23; oem_spec
Current rating	30/30 A	A	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	A	S442 p.22; oem_spec
Dimensions	Occupies 4X = 5.50 in (139.7 mm)	A	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00981	M50ATW3622R	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 60/60 A, 600 V, twin mount (4X)

OEM part number	M50ATW3622R	A	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 60/60 A, 600 V, twin mounting, 4X (5.50 in (139.7 mm)). Designed for rejection-type (Class R) fuses. Fuses not included. Branch use only (mains via Sumter).	A	S442 p.22 Table 23; oem_spec
Application	branch	A	S442 p.22; oem_spec
Voltage rating	600 V	A	S442 p.22 Table 23; oem_spec
Current rating	60/60 A	A	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	A	S442 p.22; oem_spec
Dimensions	Occupies 4X = 5.50 in (139.7 mm)	A	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

EDH-EAT-00983	M50ATW3633R	Cutler-Hammer	switch-unit	LISTED AS AN ORDERABLE

MP100 / MP2 M50 fusible switch retrofit kit, 100/100 A, 600 V, twin mount (5X)

OEM part number	M50ATW3633R	A	S442 oem_spec
Description	M50 branch fusible switch retrofit kit for Cutler-Hammer MP100 panelboard / MP2 switchboard chassis: 100/100 A, 600 V, twin mounting, 5X (6.88 in (174.8 mm)). Designed for rejection-type (Class R) fuses. Fuses not included. Branch use only (mains via Sumter).	A	S442 p.22 Table 23; oem_spec
Application	branch	A	S442 p.22; oem_spec
Voltage rating	600 V	A	S442 p.22 Table 23; oem_spec
Current rating	100/100 A	A	same as above
Kit contents	Switch, copper connectors, covers, hardware, instructions (fuses not included)	A	S442 p.22; oem_spec
Dimensions	Occupies 5X = 6.88 in (174.8 mm)	A	S442 p.22 Table 23; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.22; oem_spec
Cross-links	Families: MP100, MP2		
Not yet documented	OEM instruction document, Material, Poles		

3.10 MP40 — Cutler-Hammer MP40 distribution panelboard

FAM-EAT-032 · panelboard · aka MP 40, MP-40, MP50 (dealer usage) · markings: Cutler-Hammer

Original Cutler-Hammer distribution (circuit-breaker) panelboard built after Cutler-Hammer entered the panelboard business (1962 Mullenbach purchase) and designed/listed for Westinghouse breakers under a supply agreement. Chassis uses 1.38 in X units, 26 in wide (30/38 in boxes in layout), 5 in side gutters, 6.50 in top/bottom gutters up to 400 A (12.0 in for 600-1600 A); standard box depth 10.50 in, 11.38 in for NC/HNC. Branch kits (MP40K-series) add a breaker with connectors, device cover and hardware; Eaton says MP40 kits also fit MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards and 26.5-36 in wide NFB panelboards.

Attribute	Value	Cl.	Sources
Status	Out of production; supported by Eaton Aftermarket Center, Sumter SC (renewal parts RP01400003E)	A	S440, S441 V12-T4-12; oem_spec
Era of manufacture	Product History Time Line (V12-T4-3) places Cutler-Hammer MP40/MP100 between the CHP/CHB/NFB era and the 1988 Pow-R-Line redesign (exact start/end years not legible in text extraction) (Time-line bars are graphical; years not extractable. Cutler-Hammer entered panelboards in 1962 via Mullenbach (V12-T4-2).)	B	S440 V12-T4-3; oem_spec
Successor	Pow-R-Line 4B (PRL4B); replacement chart maps MP40 branch breakers to PRL4B breakers	A	S440 V12-T4-5; oem_spec
Main ampacity	1600 A maximum	A	S440 V12-T4-12; oem_spec
Branch breakers accepted	Original branch types per Eaton chart: CC, CCH, CHH, EB, EHB, EC, EHC, FB, HFB, FC, HFC, FH, FS, JA, JB, JS, JH, JL, KA, KB, HKB, KS-D, KH-D, DA, LA, HLA, LAB, LB, LBB, HLB, LC, LS(A), LH(A), MA, HMA, MC, HMC, MS, MH, NB, HNB, NC, HNC, NS, NH; Eaton/Westinghouse-type (Series C) breakers also listed for kits	A	S440 V12-T4-5; oem_spec
Dimensions	X unit = 1.38 in (35.1 mm); 5 in side gutters; top/bottom gutter 6.50 in through 400 A, 12.0 in 600-1600 A; standard box depth 10.50 in (266.7 mm), NC/HNC require 11.38 in (289.1 mm) deep box; layouts shown for 26/30/38 in widths	A	S440 V12-T4-12; oem_spec
Layout rules	Breakers of same frame size regardless of poles may be mounted opposite each other; if panel has main breaker, no neutral, no split bus or no sub-feed/feed-through lugs add 1X for nameplate; 1600 A lug mains with (4)-600 kcmil Cu per phase can reduce to 4X	A	same as above
Kit compatibility	MP40 branch kits also add chassis-mounted devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards and NFB panelboards 26.5-36 in wide; kits = breaker(s) + connector kit + mounting hardware + device cover + instructions; branch only, not for mains	A	S441 oem_web
Renewal doc	RP01400003E Renewal Parts Data for MP40 and MP-200; PL01400003E price list	A	S440 V12-T4-22; oem_spec
Identification	NFB (26.50-36.00 in wide), CDP, MP40: 30.00 or 38.00 in wide enclosures, up to 1200 A main breaker or fusible switch or 1600 A MLO; F- through L-frame twin-mounted horizontal with center cover between breakers. MP100: fusible switches labelled M50 30-1200 A.	A	S442 p.3 Table 1; oem_spec

Breaker families associated: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)

Key documents: S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp; S441 Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page; S442 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,; S443 PL01400003E Vintage Cutler-Hammer Panelboards and Switchboards Price List PL01400003E; S444 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it; S445 Superbreakers - Mounting Kits, Panels & Accessories collection (Shopify products.json,

Also fits this family (entry printed elsewhere): TAD3, 1A32258H03, K80522, K80133, K80429, MP40KF100-3, MP40KC225-3, MP40KJ225-3, MP40KK400-3, MP40KL600-3, MP40KM800-3, MP40KN1200-3, 52-2751

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00896	**MP40CHH**	Cutler-Hammer MP40 hardware kit for CHH breakers (twin, 225 A)	CHH (inferred from catalog number) C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00889	**MP40ED225-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, ED, FD, HFD, 225 A	ED, FD, HFD C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00972	**MP40KC225-2**	MP40 / MP2 breaker connector kit, CC, CCH, 2-pole, 225 A max, twin mount (2X)	CC, CCH A	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00973	**MP40KCHH225-2**	MP40 / MP2 breaker connector kit, CHH, 2-pole, 225 A max, twin mount (2X)	CHH A	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00974	**MP40KCHH225-3**	MP40 / MP2 breaker connector kit, CHH, 3-pole, 225 A max, twin mount (3X)	CHH A	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00969	**MP40KF100-2**	MP40 / MP2 breaker connector kit, EHD, FDB, FD, HFD, FDC, 2-pole, 100 A max, twin mount (2X)	EHD, FDB, FD, HFD, FDC A	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00970	**MP40KF225-2**	MP40 / MP2 breaker connector kit, FDB, FD, HFD, FDC, ED, EHD, EDC, 2-pole, 225 A max, twin mount (2X)	FDB, FD, HFD, FDC, ED, EHD, EDC A	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00971	**MP40KF225-3**	MP40 / MP2 breaker connector kit, FDB, FD, HFD, FDC, ED, EHD, EDC, 3-pole, 225 A max, twin mount (3X)	FDB, FD, HFD, FDC, ED, EHD, EDC A	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00892	**MP40KL400-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 400 A	LA, LS, LC, LD, HLC C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00975	**MP40KLL400-3**	MP40 / MP2 breaker connector kit, LCL, 3-pole, 400 A max, single mount (6X)	LCL A	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00898	**MPED1K**	Cutler-Hammer MP-series dual-branch connector kit, 225 A, 600 V (E/F frame)	FDB, FD, HFD, FDC, ED, EHD, EDC (specs) / ED, FD, HFD, FDC, FDB (descr C	Discontinued OEM item traded new-surplus / recertified by de

EDH-EAT-00896 **MP40CHH** Cutler-Hammer branch-connector-kit **DISCONTINUED OEM ITEM**

Cutler-Hammer MP40 hardware kit for CHH breakers (twin, 225 A)

OEM part number	MP40CHH	A	S444, S442 oem_spec
Description	CHR; MP40CHH; Hardware kit; twin; 225 A max	C	S444 surplus_listing
Application	branch (twin)	C	same as above
Installation location	MP40/MP50/MP100/MP200 per dealer	C	same as above
Breaker compatibility	CHH (inferred from catalog number)	C	same as above
Current rating	225 A maximum	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Replacement / successor	OEM CHH connector kits in RP01400003E Table 22 are MP40KCHH225-2 (2-pole, 2X) and MP40KCHH225-3 (3-pole, 3X), twin, 225 A max.	A	S442 p.20 Table 22; oem_spec
Cross-links	Families: MP40, MP2 · Breakers: Cutler-Hammer CC / CCH / CHH		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-EAT-00889	MP40ED225-3	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer MP40 twin branch breaker mounting kit, ED, FD, HFD, 225 A

OEM part number	MP40ED225-3	A	S444, S445, S442 oem_spec
Alternate / superseded numbers	MP40ED2253 (Superbreakers spelling without hyphen)	C	S445 alias; surplus_listing
Description	Cutler-Hammer twin mounting kit for MP-style panelboards; 225 A max	C	S444, S445 surplus_listing
Application	Eaton aftermarket MP40 retrofit kits can also add devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards, and Cutler-Hammer NFB panelboards 26.5 to 36 in wide; not for main devices (program-level statement applied to each MP40 kit)	A	S441 Panelboard Aftermarket help page; oem_spec
	branch (twin mount)	C	S444, S445 surplus_listing
Installation location	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	same as above
Breaker compatibility	ED, FD, HFD	C	same as above
Current rating	225 A maximum	C	same as above
Kit contents	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S445, S441 surplus_listing
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444, S445 surplus_listing
Replacement / successor	Not listed in RP01400003E Table 22. The OEM 225 A 3-pole twin connector kit for FDB, FD, HFD, FDC, ED, EHD, EDC is MP40KF225-3 (2-pole: MP40KF225-2). (Treat MP40ED225-3 as dealer/older numbering until confirmed)	A	S442 p.20 Table 22; oem_spec
Cross-links	Families: MP40, MP2 · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Dimensions, OEM instruction document, Material, oem_status_confirmation		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		
Open question	*Is MP40ED225-3 an older Sumter number superseded by MP40KF225-3, or a dealer invention?*		

EDH-EAT-00972	MP40KC225-2	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

MP40 / MP2 breaker connector kit, CC, CCH, 2-pole, 225 A max, twin mount (2X)

OEM part number	MP40KC225-2	A	S442 oem_spec
Alternate / superseded numbers	MP40KC225-2H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. CC, CCH, 2-pole, 225 A maximum, twin mounting, 2X.	A	S442 p.20 Table 22; oem_spec
Application	branch (twin mount)	A	same as above
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
Breaker compatibility	CC, CCH	A	S442 p.20 Table 22; oem_spec
Poles	2	A	same as above
Current rating	225 A maximum	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
Dimensions	Occupies 2X (2.75 in (69.9 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
Cross-links	Families: MP40, MP2, CDP, NFB · Breakers: Cutler-Hammer CC / CCH / CHH		
Not yet documented	OEM instruction document, Material, Torque values		

EDH-EAT-00973	MP40KCHH225-2	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

MP40 / MP2 breaker connector kit, CHH, 2-pole, 225 A max, twin mount (2X)

OEM part number	MP40KCHH225-2	A	S442 oem_spec
Alternate / superseded numbers	MP40KCHH225-2H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. CHH, 2-pole, 225 A maximum, twin mounting, 2X.	A	S442 p.20 Table 22; oem_spec
Application	branch (twin mount)	A	same as above
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
Breaker compatibility	CHH	A	S442 p.20 Table 22; oem_spec
Poles	2	A	same as above
Current rating	225 A maximum	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
Dimensions	Occupies 2X (2.75 in (69.9 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
Cross-links	Families: MP40, MP2, CDP, NFB · Breakers: Cutler-Hammer CC / CCH / CHH		
Not yet documented	OEM instruction document, Material, Torque values		

EDH-EAT-00974	MP40KCHH225-3	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

MP40 / MP2 breaker connector kit, CHH, 3-pole, 225 A max, twin mount (3X)

OEM part number	MP40KCHH225-3	A	S442 oem_spec
Alternate / superseded numbers	MP40KCHH225-3H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. CHH, 3-pole, 225 A maximum, twin mounting, 3X.	A	S442 p.20 Table 22; oem_spec
Application	branch (twin mount)	A	same as above
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
Breaker compatibility	CHH	A	S442 p.20 Table 22; oem_spec
Poles	3	A	same as above
Current rating	225 A maximum	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
Dimensions	Occupies 3X (4.13 in (104.9 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
Cross-links	Families: MP40, MP2, CDP, NFB · Breakers: Cutler-Hammer CC / CCH / CHH		
Not yet documented	OEM instruction document, Material, Torque values		

EDH-EAT-00969	MP40KF100-2	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

MP40 / MP2 breaker connector kit, EHD, FDB, FD, HFD, FDC, 2-pole, 100 A max, twin mount (2X)

OEM part number	MP40KF100-2	A	S442 oem_spec
Alternate / superseded numbers	MP40KF100-2H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. EHD, FDB, FD, HFD, FDC, 2-pole, 100 A maximum, twin mounting, 2X.	A	S442 p.20 Table 22; oem_spec
Application	branch (twin mount)	A	same as above
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
Breaker compatibility	EHD, FDB, FD, HFD, FDC	A	S442 p.20 Table 22; oem_spec
Poles	2	A	same as above
Current rating	100 A maximum	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
Dimensions	Occupies 2X (2.75 in (69.9 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
Cross-links	Families: MP40, MP2, CDP, NFB · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	OEM instruction document, Material, Torque values		

EDH-EAT-00970	MP40KF225-2	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

MP40 / MP2 breaker connector kit, FDB, FD, HFD, FDC, ED, EHD, EDC, 2-pole, 225 A max, twin mount (2X)

OEM part number	MP40KF225-2	A	S442 oem_spec
Alternate / superseded numbers	MP40KF225-2H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. FDB, FD, HFD, FDC, ED, EHD, EDC, 2-pole, 225 A maximum, twin mounting, 2X.	A	S442 p.20 Table 22; oem_spec
Application	branch (twin mount)	A	same as above
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
Breaker compatibility	FDB, FD, HFD, FDC, ED, EHD, EDC	A	S442 p.20 Table 22; oem_spec
Poles	2	A	same as above
Current rating	225 A maximum	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
Dimensions	Occupies 2X (2.75 in (69.9 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
Cross-links	Families: MP40, MP2, CDP, NFB · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	OEM instruction document, Material, Torque values		

EDH-EAT-00971	MP40KF225-3	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

MP40 / MP2 breaker connector kit, FDB, FD, HFD, FDC, ED, EHD, EDC, 3-pole, 225 A max, twin mount (3X)

OEM part number	MP40KF225-3	A	S442 oem_spec
Alternate / superseded numbers	MP40KF225-3H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. FDB, FD, HFD, FDC, ED, EHD, EDC, 3-pole, 225 A maximum, twin mounting, 3X.	A	S442 p.20 Table 22; oem_spec
Application	branch (twin mount)	A	same as above
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
Breaker compatibility	FDB, FD, HFD, FDC, ED, EHD, EDC	A	S442 p.20 Table 22; oem_spec
Poles	3	A	same as above
Current rating	225 A maximum	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
Dimensions	Occupies 3X (4.13 in (104.9 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
Cross-links	Families: MP40, MP2, CDP, NFB · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	OEM instruction document, Material, Torque values		

EDH-EAT-00892	MP40KL400-3	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 400 A

OEM part number	MP40KL400-3	A	S444, S445, S442 oem_spec
Alternate / superseded numbers	MP40KL4003 (Superbreakers spelling without hyphen)	C	S445 alias; surplus_listing
Description	Cutler-Hammer twin mounting kit for MP-style panelboards; 400 A max	C	S444, S445 surplus_listing
Application	Eaton aftermarket MP40 retrofit kits can also add devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards, and Cutler-Hammer NFB panelboards 26.5 to 36 in wide; not for main devices (program-level statement applied to each MP40 kit)	A	S441 Panelboard Aftermarket help page; oem_spec
	branch (twin mount)	C	S444, S445 surplus_listing
Installation location	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	same as above
Breaker compatibility	LA, LS, LC, LD, HLC	C	same as above
Current rating	400 A maximum	C	same as above
Kit contents	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S445, S441 surplus_listing
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444, S445 surplus_listing
Replacement / successor	Not listed in RP01400003E Table 22. OEM L-frame kits are MP40KL600-3 (LD/HLD/LDC, twin, 600 A, 6X) and MP40KLL400-3 (LCL 400 A, single, 6X).	A	S442 p.20 Table 22; oem_spec
Cross-links	Families: MP40, MP2 · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Dimensions, OEM instruction document, Material, oem_status_confirmation		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		
Open question	*Dealer listing ties MP40KL400-3 to LA/LS/LC/LD/HLC 400 A (older Relectric-era L-frames). Possibly an older Sumter kit for 400 A LA/LB-era breakers; confirm.*		

EDH-EAT-00975	MP40KLL400-3	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

MP40 / MP2 breaker connector kit, LCL, 3-pole, 400 A max, single mount (6X)

OEM part number	MP40KLL400-3	A	S442 oem_spec
Alternate / superseded numbers	MP40KLL400-3H (Same number + "H" = hardware-only kit (mounting brackets, filler plates, mounting hardware; no connectors))	A	S442 alias; p.20 "Hardware kit"; oem_spec
Description	MP40 breaker connector kit (breaker not included): copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on an MP40 panelboard or MP200/MP2 switchboard chassis. LCL, 3-pole, 400 A maximum, single mounting, 6X.	A	S442 p.20 Table 22; oem_spec
Application	branch (single mount)	A	same as above
Installation location	MP40 panelboard / MP2 (MP200) switchboard distribution chassis branch position; RP section heading groups MP40 with CDP and NFB 26.50-36.00 in wide panels	A	S442 p.19-20; oem_spec
Breaker compatibility	LCL	A	S442 p.20 Table 22; oem_spec
Poles	3	A	same as above
Current rating	400 A maximum	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S442 p.20; oem_spec
Dimensions	Occupies 6X (8.25 in (209.6 mm)) of chassis height	A	S442 p.20 Table 22; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.20; oem_spec
Cross-links	Families: MP40, MP2, CDP, NFB · Breakers: Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	OEM instruction document, Material, Torque values		

EDH-EAT-00898	MPED1K	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer MP-series dual-branch connector kit, 225 A, 600 V (E/F frame)

OEM part number	MPED1K	C	S446 surplus_listing
Description	225A dual (twin) branch panelboard connector kit, copper, 600 V	C	same as above
Application	branch (twin)	C	same as above
Installation location	MP40 (also MP50, MP100, MP200 per description)	C	same as above
Breaker compatibility	FDB, FD, HFD, FDC, ED, EHD, EDC (specs) / ED, FD, HFD, FDC, FDB (description)	C	same as above
Voltage rating	600 V	C	same as above
Current rating	225 A	C	same as above
Material	Copper	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: MP40, MP2 · Breakers: Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, oem_status_confirmation		
Open question	*Relationship between MPED1K and MP40ED225-3 (both 225 A twin ED/FD kits)?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00897	**MP403XBLANK**	Cutler-Hammer MP40 3X high filler blank	—	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00976	**MP40FC-_X**	MP40 filler cover, any 1X increment (MP40FC-_X, fill in size)	—	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00897	MP403XBLANK	Cutler-Hammer	filler-plate	DISCONTINUED OEM ITEM

Cutler-Hammer MP40 3X high filler blank

OEM part number	MP403XBLANK	A	S444, S442 oem_spec
Description	Cutler Hammer MP40 3X high filler blank	C	S444 surplus_listing
Installation location	MP40 chassis unused 3X (3 x 1.38 in) space	C	same as above
Dimensions	3X high (3 x 1.38 in = 4.14 in) - X unit from Vol 12	C	S444, S440 inference
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444 surplus_listing
Replacement / successor	OEM catalog format for a 3X MP40 filler cover is MP40FC-3X (MP40FC-_X, any 1X = 1.38 in increment, includes cover, brackets and hardware). "MP403XBLANK" does not appear in RP01400003E and is likely a dealer description.	A	S442 p.20; oem_spec
Cross-links	Families: MP40		
Not yet documented	OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*Dealer spec block for MP403XBLANK says 'Panel Type PRL3A, BAB QBHW, 100 A' - conflicting; verify against part*		

EDH-EAT-00976	MP40FC-_X	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

MP40 filler cover, any 1X increment (MP40FC-_X, fill in size)

OEM part number	MP40FC-_X	A	S442 oem_spec
Description	MP40 filler covers available in any increment of 1X = 1.38 in (35.1 mm). Catalog number MP40FC-_X (fill in size, e.g. MP40FC-3X). Includes cover, mounting brackets and hardware.	A	S442 p.20; oem_spec
Kit contents	Cover, mounting brackets, hardware	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	same as above
Cross-links	Families: MP40, MP2		
Not yet documented	Material, width		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00996	**99-1016**	Cutler-Hammer panelboard trim clamp (PB)	—	Contact Sumter Aftermarket Product Center for availability
EDH-EAT-00995	**99-970**	Cutler-Hammer panelboard trim clamp (MP40, PWW)	—	Contact Sumter Aftermarket Product Center for availability
EDH-EAT-00977	**MP40KF100-3H**	MP40 hardware-only kit for MP40KF100-3 (example of "H" suffix)	—	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00996	99-1016	Cutler-Hammer	hardware-kit	CONTACT SUMTER AFTERMA

Cutler-Hammer panelboard trim clamp (PB)

OEM part number	99-1016	A	S442 oem_spec
Description	Panelboard trim clamp: Used on PB and PW trims	A	S442 p.23 Table 25; oem_spec
Status	Contact Sumter Aftermarket Product Center for availability	A	S442 p.23; oem_spec
Cross-links	Families: MP40, PB		
Not yet documented	Dimensions, Material		

EDH-EAT-00995	99-970	Cutler-Hammer	hardware-kit	CONTACT SUMTER AFTERMA

Cutler-Hammer panelboard trim clamp (MP40, PWW)

OEM part number	99-970	**A**	S442 oem_spec
Description	Panelboard trim clamp: Used on MP40, PWW and all door-on-door trims	**A**	S442 p.23 Table 25; oem_spec
Status	Contact Sumter Aftermarket Product Center for availability	**A**	S442 p.23; oem_spec
Cross-links	Families: MP40		
Not yet documented	Dimensions, Material		

EDH-EAT-00977	MP40KF100-3H	Cutler-Hammer	hardware-kit	LISTED AS AN ORDERABLE

MP40 hardware-only kit for MP40KF100-3 (example of "H" suffix)

OEM part number	MP40KF100-3H	**A**	S442 oem_spec
Description	Hardware kit: mounting bracket(s), filler plates and mounting hardware ONLY; catalog number = connector kit number + "H". Example printed by Eaton: MP40KF100-3H.	**A**	S442 p.20; oem_spec
Kit contents	Mounting bracket(s), filler plates, mounting hardware (no connectors)	**A**	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	**A**	same as above
Cross-links	Families: MP40, MP2 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00968	**KMP40KD3400**	MP40 / CDP / NFB breaker retrofit kit, KD 3-pole 400 A (example of KMP40 + breaker catalog number scheme)	100 A: EHD, FDB, FD, HFD, FDC 15-100 A, FCL 15-100 A, FB-P 15-100 A (3 **A**	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00968	KMP40KD3400	Cutler-Hammer	conversion-kit	LISTED AS AN ORDERABLE

MP40 / CDP / NFB breaker retrofit kit, KD 3-pole 400 A (example of KMP40 + breaker catalog number scheme)

OEM part number	KMP40KD3400	**A**	S442 oem_spec
Description	MP40 breaker retrofit kit catalog number = "KMP40" + breaker frame + poles (2/3) + amperes; example KMP40KD3400 (3-pole 400 A KD). Kit includes one breaker, copper connectors, mounting brackets, covers, hardware and instructions; fits MP40 and CDP panel chassis (26.50-36.00 in wide) and MP2 switchboard chassis. A second breaker for twin mounting is a separate item.	**A**	S442 p.19 Tables 20-21; oem_spec
Breaker compatibility	100 A: EHD, FDB, FD, HFD, FDC 15-100 A, FCL 15-100 A, FB-P 15-100 A (3X twin); 150 A: FDB/FD/HFD/FDC 110-225 A (3X twin); 225 A: ED/EDH/EDC 125-225 A (3X twin); 250 A: JD/HJD/JDC 70-250 A (3X twin); 400 A: KD/HKD/KDC (4X twin); 600 A: LD/HLD/LDC 300-600 A (6X twin); 800 A: MDL/HMDL 400-800 A (6X single); 1200 A: ND/HND/NDC 600-1200 A (6X single)	**A**	S442 p.19 Table 20; oem_spec
Kit contents	One breaker, copper connectors, mounting brackets, covers, hardware, instructions	**A**	S442 p.19; oem_spec
Dimensions	3X = 4.13 in (104.9 mm); 4X = 5.50 in (139.7 mm); 6X = 8.25 in (209.6 mm)	**A**	S442 p.19 Table 20; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Order with catalog number, list price, standard multiplier and location SUM or Q49.	**A**	S442 p.2, p.19; oem_spec
Cross-links	Families: MP40, CDP, NFB, MP2 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Current-limiting FCL / LCL (and FDB+LFB), TRI-PAC integrally fused (FB-P, LA-P, NB-P)		
Not yet documented	OEM instruction document, Material		

3.11 NAB — Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards

FAM-EAT-025 · panelboard · aka A2B, ABH, HNDP, NA1B, NAB, NAIB, NDP, NEB, NH1B, NHB, NHDP, NHEB, NHIB · markings: Cutler-Hammer, Westinghouse

Westinghouse 1937-1988 lighting/appliance and distribution panelboards using E-family plug/bolt breakers. Branch breakers replaced by 'panelboard only' R-prefix breakers (REH, RHF, RHFA) supplied with mounting hardware; connector kits not available. The scope term 'NHB' is not used in Vol 12; nearest OEM designations are NH1B and NHEB.

Evidence-only record: 1946 Westinghouse catalog lists NA1B-AB De-ion lighting panel; Vol 12 Cutler-Hammer chart shows Cutler-Hammer-labelled NA1B, NH1B, NDP and HNDP (E/EA/EH breakers) replaced by PRL3a with REH panelboard replacement breakers, connectors not available.

Attribute	Value	Cl.	Sources
Status	discontinued; connectors not available; replacement panelboard PRL3a (NAB, NA1B, NDP, NEB, NHDP, NHEB, ABH) or PRL2a (NH1B); panelboard-only replacement breaker REH/RHFA	A	S13 p. V12-T4-7; oem_spec
Era of manufacture	NA1B ('NAIB - AB De-ion') listed in 1946 Westinghouse NOFUZE catalog	A	S435 ECM Sept 1946, Westinghouse catalog; oem_spec
Branch breakers accepted	E, EA, EAH, EH, FA, E-277 (replacement breaker REH; RHFA for FA)	A	S13 p. V12-T4-7; oem_spec
Cutler hammer variant	Cutler-Hammer NA1B (E, EA), NH1B (EH), NDP (E, EA), HNDP (EH) -> PRL3a / REH; connectors not available	A	S440 V12-T4-4; oem_spec

Breaker families associated: E, F, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)
Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S435 sim_ecm_1946-09_45 Electrical Construction and Maintenance, Vol 45, September 1946 (Electrical Contracting) -; S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp

3.12 NFB — Cutler-Hammer NFB panelboard

FAM-EAT-040 · panelboard · aka Type NFB · markings: Cutler-Hammer

Cutler-Hammer panelboard (pictured as 'Cutler-Hammer NFB' on V12-T4-2) using Westinghouse E/F-frame and CA/CC breakers. Eaton says MP40 branch kits can add chassis-mounted devices to NFB panelboards 26.5-36 in wide.

Attribute	Value	Cl.	Sources
Successor	PRL3a or PRL4B (EB/EHB->EHD, EHC/FB/HFB/FD/FC/FS->FD, FH/HFC->HFD, CA->CA, CC->CC, CHH->CHH)	A	S440 V12-T4-4; oem_spec
Branch breakers accepted	EB, EHB, EHC, EC, CA, CC, FB, HFB, FD, FC, FH, FS, HFC, CCH, CHH	A	same as above
Kit compatibility	MP40 kits fit NFB panelboards 26.5 to 36 in wide	A	S441 oem_web

Breaker families associated: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)
Key documents: S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp; S441 Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page
Also fits this family (entry printed elsewhere): MP40KF100-3, MP40KC225-3, MP40KJ225-3, MP40KK400-3, MP40KL600-3, MP40KM800-3, MP40KN1200-3, KPH-LFDB3100T, 47-15718-2, KMP40KD3400, MP40KF100-2, MP40KF225-2, MP40KF225-3, MP40KC225-2, MP40KCHH225-2, MP40KCHH225-3, MP40KLL400-3

3.13 NLAB — Westinghouse NLAB lighting panelboard

FAM-EAT-024 · panelboard · aka NLAB, NLAB single row, NLAB-AB, NLAB-ABH, NLAB-LX, NPLAB, NQB, NQC, NQP · markings: Cutler-Hammer, Westinghouse

Westinghouse plug-in/bolt-on lighting panelboards for Quicklag-type Q breakers. Vol 12 flags 'connectors not available' for this group; replacement is a new PRL1a/PRL3a interior. CDP/FDP/NQB trim clamp 414A380G02 still applies to NQB.

Evidence-only record for the existing Westinghouse NLAB family: 1946 Westinghouse NOFUZE catalog lists NLAB Quicklag De-ion and NLAB single-row (column) panelboards; Vol 12 shows Cutler-Hammer also sold NLAB and NPLAB (QL / P breakers) with connectors not available and PRL1a as replacement. Note that GE also used the NLAB designation (TQ/TQC breakers) - see GEA NLAB.

Attribute	Value	Cl.	Sources
Status	discontinued; connectors not available; replace panelboard with PRL1a (NLAB, NPLAB, NQB, NQP, NQC), PRL1aLX (NLAB-LX), PRL3a (NLAB-AB/ABH)	A	S13 p. V12-T4-7; oem_spec
Era of manufacture	Westinghouse panelboards manufactured between 1937 and 1988	A	same as above
	Offered by Westinghouse by Sept 1946 as 'NLAB Quicklag De-ion' NOFUZE panelboard (also single-row type for mounting on H or I beams); in wide use 1958-1960; Vol 12 groups it with panelboards made 1937-1988	A	S435, S440 ECM Sept 1946 Westinghouse catalog B62; V12-T4-7; oem_spec
Voltage rating	NLAB in 120/208 V 3-phase 4-wire and 120/240 V use (installation reports) (Trade-press installation stories, not OEM specs)	C	S447, S451, S448 surplus_listing

Attribute	Value	Cl.	Sources
Branch breakers accepted	NLAB: QC; NPLAB/NQP: QP (new breaker HQP); NQB: BA (new BAB); NQC: QC	A	S13 p. V12-T4-7; oem_spec
	Quicklag (QC per Vol 12) breakers; Cutler-Hammer-labelled NLAB used QL per Cutler-Hammer chart	A	S435, S440 V12-T4-4, V12-T4-7; oem_spec
Connectors	Connectors not available (note 2) for NLAB, NLAB-LX, NLAB-AB, NLAB-ABH, NPLAB, NQB, NQC, NQP	A	S13 p. V12-T4-7; oem_spec
Cutler hammer variant	Cutler-Hammer panelboard types NPLAB (P breaker) and NLAB (QL breaker) -> PRL1a, connectors not available	A	S440 V12-T4-4; oem_spec

Breaker families associated: BAB, Westinghouse Quicklag (QC / QL / QP) lighting breakers
Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S435 sim_ecm_1946-09_45 Electrical Construction and Maintenance, Vol 45, September 1946 (Electrical Contracting) -; S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp; S447 sim_ecm_1958-06_57_6; sim_electrical-south_1958-06_38_6 Electrical Construction and Maintenance June 1958 / Electrical South June 1958 - Westingho; S448 sim_plant-engineering_1960-04_14_4 Plant Engineering Vol 14 No 4-6 (April-June 1960) - Westinghouse ad: flush-mounted type NL; S451 sim_ecm_1959-02_58_2 Electrical Construction and Maintenance, February 1959 - article text: 'Two of the panelbo
Also fits this family (entry printed elsewhere): 414A380G02

3.14 NM/NMM — Westinghouse NM / NMM / NMIB Multibreaker panelboards

FAM-EAT-041 · panelboard · aka NMM, NMIB, NM1B, MH Multibreaker, NOFUZE panelboard · markings: Westinghouse
Earliest Westinghouse NOFUZE (later spelled NOFUSE) circuit-breaker panelboards using Multibreaker units, offered alongside NLAB (Quicklag) and NA1B (AB De-ion) in 1946. NMM and NLAB were also offered in single-row type for mounting on H or I beams. Westinghouse introduced breakers in 1927 and NOFUSE panelboards were initially available up to 225 A at 250 V (Vol 12 history).

Attribute	Value	Cl.	Sources
Status	Obsolete; no Vol 12 replacement row found	B	S440 inference
Era of manufacture	Sold as NOFUZE Multibreaker panelboards in 1946 (NMIB 115/240 V single-phase only; NMM 115/230 V AC); Vol 12 time line lists 'Westinghouse NM/NMM' among the earliest types	A	S435, S440 ECM Sept 1946 B62; V12-T4-3; oem_spec
Voltage rating	NMIB: 115/240 V AC single-phase only; NMM: 115/230 V AC (OCR column order makes the type-to-voltage pairing slightly uncertain)	B	S435 ECM Sept 1946 B62; oem_spec
Branch breakers accepted	Westinghouse Multibreaker (1946); typical combinations 15 A 1-pole lighting, 20 A 2-pole water heater, 35/50 A 2-pole range, 70 A mains	A	S435 oem_spec

Key documents: S435 sim_ecm_1946-09_45 Electrical Construction and Maintenance, Vol 45, September 1946 (Electrical Contracting) -; S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp

3.15 PB — Cutler-Hammer Type PB lighting panelboard

FAM-EAT-035 · panelboard · aka Type PB · markings: Cutler-Hammer
Cutler-Hammer lighting panelboard using CH/CHB branch breakers (1 in Cutler-Hammer residential/light-commercial breaker family). Replacement is a new PRL1a interior with CH or CHB breakers; Eaton states connectors are not available. Do not confuse with the Westinghouse/Eaton 'Type PB' power circuit breaker listed elsewhere in Vol 12.

Attribute	Value	Cl.	Sources
Status	Out of production; connectors not available (chart note 3)	A	S440 V12-T4-5; oem_spec
Successor	Pow-R-Line 1a (PRL1a) with CH / CHB breakers	A	same as above
Main ampacity	400 A maximum	A	S440 V12-T4-11; oem_spec
Branch breakers accepted	Cutler-Hammer CH (plug-on) and CHB (bolt-on) breakers	A	S440 V12-T4-5; oem_spec
Dimensions	PB illustrated in 21 in wide box (PB/PH/PH-L page) (Width labels on the page are not unambiguously tied to each type in text extraction)	B	S440 V12-T4-11; oem_spec
Identification	PB: 15.00 in wide (up to 225 A) or 21.00 in wide (up to 400 A); branch breakers in two vertical cutouts 7.00 in side to side; tan or gray handles (CH/CHB).	A	S442 p.3 Table 1; oem_spec

Breaker families associated: Cutler-Hammer CH / CHB
Key documents: S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp; S442 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,
Also fits this family (entry printed elsewhere): 1A32258H03, K80522, K80133, K80429, 99-1016

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00907	**39-3613-16**	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 1-phase 3-wire and 3-phase 4-wire, 42 poles, 225 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00911	**39-3613-27**	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 3-phase 4-wire, 42 poles, 225 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00909	**99-3613-11**	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 3-phase 4-wire, 30 poles, 125 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00913	**99-3613-13**	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 3-phase 4-wire, 18 poles, 100 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00910	**99-3613-17**	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 3-phase 4-wire, 30 poles, 225/400 (printed "225 400") A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00903	**99-3613-20**	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 1-phase 3-wire, 42 poles, 225 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00905	**99-3613-22**	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 1-phase 3-wire, 18 poles, 100 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00916	**99-3613-28**	Type PB panelboard deadfront cover kit, 21.00 in wide box, Main breaker, 3-phase 4-wire, 42 poles, 400 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00908	**99-3613-29**	Type PB panelboard deadfront cover kit, 21.00 in wide box, Main breaker, 1-phase 3-wire, 42 poles, 400 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00915	**99-3613-3**	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 3-phase 4-wire, 30 poles, 225 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00914	**99-3613-30**	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 3-phase 4-wire, 24 poles, 100 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00912	**99-3613-4**	Type PB panelboard deadfront cover kit, 21.00 in wide box, Main lugs only, 3-phase 4-wire, 42 poles, 400 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00902	**99-3613-5**	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 1-phase 3-wire, 30 poles, 225 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00906	**99-3613-8**	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker 1-phase 3-wire, 30 poles, 150/225 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00904	**99-3613-9**	Type PB panelboard deadfront cover kit, 21.00 in wide box, Main lugs only, 1-phase 3-wire, 42 poles, 400 A	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00917	**PW30KT1NB**	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main lugs only 18 poles 125 A (1-ph 3-w and 3-ph 4-w))	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00923	**PW30KT3NB**	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main lugs only 3-ph 4-wire 30 poles 125 A)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00918	**PW34KT1NB**	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main lugs only 30 poles 225 A 1-ph)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00920	**PW34KT2NB**	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main breaker 1-ph 3-wire 18 poles 100 A)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00919	**PW38KT1NB**	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main lugs only 42 poles 225 A (1-ph and 3-ph))	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00921	**PW42KT1NB**	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main breaker 30 poles 150/225 A (1-ph and 3-ph))	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00922	**PW50KT1NB**	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main breaker 42 poles 225 A (1-ph and 3-ph))	—	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00907	39-3613-16	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 1-phase 3-wire and 3-phase 4-wire, 42 poles, 225 A

OEM part number	39-3613-16	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 15.00 in wide box, Main breaker, 1-phase 3-wire and 3-phase 4-wire, 42 maximum pole spaces, 225 A main, box height 48.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 15.00 in wide x 48.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		
Open question	*Printed as 39-3613-xx while every other PB/PH deadfront kit is 99-3613-xx; probable typesetting error for 99-3613-16. Confirm with Sumter.*		

EDH-EAT-00911	39-3613-27	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 3-phase 4-wire, 42 poles, 225 A

OEM part number	39-3613-27	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 15.00 in wide box, Main lugs only, 3-phase 4-wire, 42 maximum pole spaces, 225 A main, box height 38.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 15.00 in wide x 38.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		
Open question	*Printed as 39-3613-xx while every other PB/PH deadfront kit is 99-3613-xx; probable typesetting error for 99-3613-27. Confirm with Sumter.*		

EDH-EAT-00909	99-3613-11	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 3-phase 4-wire, 30 poles, 125 A

OEM part number	99-3613-11	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 15.00 in wide box, Main lugs only, 3-phase 4-wire, 30 maximum pole spaces, 125 A main, box height 29.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 15.00 in wide x 29.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00913	99-3613-13	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 3-phase 4-wire, 18 poles, 100 A

OEM part number	99-3613-13	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 15.00 in wide box, Main breaker, 3-phase 4-wire, 18 maximum pole spaces, 100 A main, box height 34.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 15.00 in wide x 34.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00910	99-3613-17	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 3-phase 4-wire, 30 poles, 225/400 (printed "225 400") A

OEM part number	99-3613-17	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 15.00 in wide box, Main lugs only, 3-phase 4-wire, 30 maximum pole spaces, 225/400 (printed "225 400") A main, box height 34.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 15.00 in wide x 34.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00903	99-3613-20	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 1-phase 3-wire, 42 poles, 225 A

OEM part number	99-3613-20	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 15.00 in wide box, Main lugs only, 1-phase 3-wire, 42 maximum pole spaces, 225 A main, box height 38.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 15.00 in wide x 38.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00905	99-3613-22	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 1-phase 3-wire, 18 poles, 100 A

OEM part number	99-3613-22	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 15.00 in wide box, Main breaker, 1-phase 3-wire, 18 maximum pole spaces, 100 A main, box height 34.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 15.00 in wide x 34.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00916	99-3613-28	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 21.00 in wide box, Main breaker, 3-phase 4-wire, 42 poles, 400 A

OEM part number	99-3613-28	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 21.00 in wide box, Main breaker, 3-phase 4-wire, 42 maximum pole spaces, 400 A main, box height 63.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 21.00 in wide x 63.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00908	99-3613-29	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 21.00 in wide box, Main breaker, 1-phase 3-wire, 42 poles, 400 A

OEM part number	99-3613-29	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 21.00 in wide box, Main breaker, 1-phase 3-wire, 42 maximum pole spaces, 400 A main, box height 63.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 21.00 in wide x 63.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00915	99-3613-3	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 3-phase 4-wire, 30 poles, 225 A

OEM part number	99-3613-3	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 15.00 in wide box, Main breaker, 3-phase 4-wire, 30 maximum pole spaces, 225 A main, box height 42.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 15.00 in wide x 42.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00914	99-3613-30	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 3-phase 4-wire, 24 poles, 100 A

OEM part number	99-3613-30	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 15.00 in wide box, Main breaker, 3-phase 4-wire, 24 maximum pole spaces, 100 A main, box height 34.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 15.00 in wide x 34.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00912	99-3613-4	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 21.00 in wide box, Main lugs only, 3-phase 4-wire, 42 poles, 400 A

OEM part number	99-3613-4	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 21.00 in wide box, Main lugs only, 3-phase 4-wire, 42 maximum pole spaces, 400 A main, box height 54.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 21.00 in wide x 54.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00902	99-3613-5	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 1-phase 3-wire, 30 poles, 225 A

OEM part number	99-3613-5	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 15.00 in wide box, Main lugs only, 1-phase 3-wire, 30 maximum pole spaces, 225 A main, box height 34.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 15.00 in wide x 34.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00906	99-3613-8	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker 1-phase 3-wire, 30 poles, 150/225 A

OEM part number	99-3613-8	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 15.00 in wide box, Main breaker 1-phase 3-wire (30 poles, 150 A and 225 A [printed 255]); also main breaker 3-phase 4-wire 30 poles 150 A, 30 maximum pole spaces, 150/225 A main, box height 42.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 15.00 in wide x 42.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00904	99-3613-9	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 21.00 in wide box, Main lugs only, 1-phase 3-wire, 42 poles, 400 A

OEM part number	99-3613-9	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PB lighting panelboard: indoor 21.00 in wide box, Main lugs only, 1-phase 3-wire, 42 maximum pole spaces, 400 A main, box height 54.00 in	A	S442 p.4 Table 2; oem_spec
Installation location	Deadfront (inner cover) over PB interior, behind trim	A	S442 p.4 figure; oem_spec
Dimensions	Fits box 21.00 in wide x 54.00 in high (indoor) (Box dimensions, not cover dimensions)	A	S442 p.4 Table 2; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00917	PW30KT1NB	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 21.00 in wide box (Main lugs only 18 poles 125 A (1-ph 3-w and 3-ph 4-w))

OEM part number	PW30KT1NB	A	S442 oem_spec
Description	Deadfront cover kit for Type PB lighting panelboard in indoor 21.00 in (533.4 mm) wide box: Main lugs only 18 poles 125 A (1-ph 3-w and 3-ph 4-w), box 30.00 in high	A	S442 p.4 Table 2; oem_spec
Dimensions	Fits 21.00 in wide box; 30.00 in high (Box size, not cover size)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		
Open question	*PW..KT..NB prefix suggests the cover kit is shared with PW-type panels (99-1016 trim clamp is "used on PB and PW trims"); confirm.*		

EDH-EAT-00923	PW30KT3NB	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 21.00 in wide box (Main lugs only 3-ph 4-wire 30 poles 125 A)

OEM part number	PW30KT3NB	A	S442 oem_spec
Description	Deadfront cover kit for Type PB lighting panelboard in indoor 21.00 in (533.4 mm) wide box: Main lugs only 3-ph 4-wire 30 poles 125 A, box 30.00 in high	A	S442 p.4 Table 2; oem_spec
Dimensions	Fits 21.00 in wide box; 30.00 in high (Box size, not cover size)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		
Open question	*PW..KT..NB prefix suggests the cover kit is shared with PW-type panels (99-1016 trim clamp is "used on PB and PW trims"); confirm.*		

EDH-EAT-00918	PW34KT1NB	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 21.00 in wide box (Main lugs only 30 poles 225 A 1-ph)

OEM part number	PW34KT1NB	A	S442 oem_spec
Description	Deadfront cover kit for Type PB lighting panelboard in indoor 21.00 in (533.4 mm) wide box: Main lugs only 30 poles 225 A 1-ph; MLO 30 poles 225/400 A 3-ph; main breaker 3-ph 18/24 poles 100 A; box 34.00 in high	A	S442 p.4 Table 2; oem_spec
Dimensions	Fits 21.00 in wide box; 34.00 in high (Box size, not cover size)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		
Open question	*PW..KT..NB prefix suggests the cover kit is shared with PW-type panels (99-1016 trim clamp is "used on PB and PW trims"); confirm.*		

EDH-EAT-00920	PW34KT2NB	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 21.00 in wide box (Main breaker 1-ph 3-wire 18 poles 100 A)

OEM part number	PW34KT2NB	A	S442 oem_spec
Description	Deadfront cover kit for Type PB lighting panelboard in indoor 21.00 in (533.4 mm) wide box: Main breaker 1-ph 3-wire 18 poles 100 A, box 34.00 in high	A	S442 p.4 Table 2; oem_spec
Dimensions	Fits 21.00 in wide box; 34.00 in high (Box size, not cover size)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		
Open question	*PW..KT..NB prefix suggests the cover kit is shared with PW-type panels (99-1016 trim clamp is "used on PB and PW trims"); confirm.*		

EDH-EAT-00919	PW38KT1NB	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 21.00 in wide box (Main lugs only 42 poles 225 A (1-ph and 3-ph))

OEM part number	PW38KT1NB	**A**	S442 oem_spec
Description	Deadfront cover kit for Type PB lighting panelboard in indoor 21.00 in (533.4 mm) wide box: Main lugs only 42 poles 225 A (1-ph and 3-ph), box 38.00 in high	**A**	S442 p.4 Table 2; oem_spec
Dimensions	Fits 21.00 in wide box; 38.00 in high (Box size, not cover size)	**A**	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	**A**	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		
Open question	*PW..KT..NB prefix suggests the cover kit is shared with PW-type panels (99-1016 trim clamp is "used on PB and PW trims"); confirm.*		

EDH-EAT-00921	PW42KT1NB	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 21.00 in wide box (Main breaker 30 poles 150/225 A (1-ph and 3-ph))

OEM part number	PW42KT1NB	**A**	S442 oem_spec
Description	Deadfront cover kit for Type PB lighting panelboard in indoor 21.00 in (533.4 mm) wide box: Main breaker 30 poles 150/225 A (1-ph and 3-ph), box 42.00 in high	**A**	S442 p.4 Table 2; oem_spec
Dimensions	Fits 21.00 in wide box; 42.00 in high (Box size, not cover size)	**A**	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	**A**	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		
Open question	*PW..KT..NB prefix suggests the cover kit is shared with PW-type panels (99-1016 trim clamp is "used on PB and PW trims"); confirm.*		

EDH-EAT-00922	PW50KT1NB	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PB panelboard deadfront cover kit, 21.00 in wide box (Main breaker 42 poles 225 A (1-ph and 3-ph))

OEM part number	PW50KT1NB	**A**	S442 oem_spec
Description	Deadfront cover kit for Type PB lighting panelboard in indoor 21.00 in (533.4 mm) wide box: Main breaker 42 poles 225 A (1-ph and 3-ph), box 50.00 in high	**A**	S442 p.4 Table 2; oem_spec
Dimensions	Fits 21.00 in wide box; 50.00 in high (Box size, not cover size)	**A**	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	**A**	S442 p.2, p.4; oem_spec
Cross-links	Families: PB · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		
Open question	*PW..KT..NB prefix suggests the cover kit is shared with PW-type panels (99-1016 trim clamp is "used on PB and PW trims"); confirm.*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00924	**CH9CP**	Cutler-Hammer CH/CHB breaker filler (cover) plate for PB and PH panelboards	CH and CHB breaker spaces **A**	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00924	CH9CP	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Cutler-Hammer CH/CHB breaker filler (cover) plate for PB and PH panelboards

OEM part number	CH9CP	A	S442 oem_spec
Description	Filler plate for Type PB panelboards (Table 3); breaker cover plate for CH and CHB breakers in Type PH panelboards (Table 8)	A	S442 p.4 Table 3; p.8 Table 8; oem_spec
Installation location	Deadfront opening of unused CH/CHB breaker space	A	S442 p.4, p.8; oem_spec
Breaker compatibility	CH and CHB breaker spaces	A	S442 p.8 Table 8; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.4; oem_spec
Cross-links	Families: PB, PH · Breakers: Cutler-Hammer CH / CHB		
Not yet documented	Dimensions, Material, pole_width		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00997	**52-2751**	Panelboard trim lock (WEM 2 key)	—	Contact Sumter Aftermarket Product Center for availability (

EDH-EAT-00997	52-2751	Cutler-Hammer	trim	CONTACT SUMTER AFTERMA

Panelboard trim lock (WEM 2 key)

OEM part number	52-2751	A	S442 oem_spec
Description	Vintage Cutler-Hammer panelboard trim lock: WEM 2 key; used on lighting and small panels as standard	A	S442 p.23 Table 26; oem_spec
Status	Contact Sumter Aftermarket Product Center for availability (trim locks redesigned over the years)	A	S442 p.23; oem_spec
Cross-links	Families: PB, PH, MP40, EP		
Not yet documented	Dimensions, Material		

3.16 PH — Cutler-Hammer Type PH / PH-L panelboard

FAM-EAT-036 · panelboard · aka PH-L, Type PH · markings: Cutler-Hammer

Cutler-Hammer lighting/appliance-to-power panelboard family accepting CH/CHB small breakers and CC/CCH/CHH, E- and F-frame branch breakers. Shown in 15/21 in and 21/26 in widths on the Vol 12 identification page. Retrofit kits (e.g. KPHCC3175S single-mount CC kit with cover plate) are traded by dealers.

Attribute	Value	Cl.	Sources
Status	Out of production; parts/retrofit kits via RP01400003E and Sumter Aftermarket Center	A	S440 V12-T4-11; oem_spec
Successor	Pow-R-Line 3a (PRL3a); chart maps CH->CH, CHB->CHB, CC->CC, CCH->CCH, CHH->CHH, EB/EHB/EC->EHD, EHD->EHD, FC/FS/FD->FD, FH->HFD	A	S440 V12-T4-5; oem_spec
Main ampacity	PH: 800 A main lug only or 600 A main breaker; PH-L: 225 A maximum	A	S440 V12-T4-11; oem_spec
Branch breakers accepted	CH, CHB, CC, CCH, CHH, EB, EHB, EC, EHD, FC, FS, FH, FD	A	S440 V12-T4-5; oem_spec
Dimensions	Boxes 15 or 21 in wide and 21 or 26 in wide shown for PH-L / PH (page labels) (Assignment of widths to PH vs PH-L not unambiguous in extracted text)	B	S440 V12-T4-11; oem_spec
Identification	PH: 21.00 in wide (up to 600 A) or 26.00 in wide (up to 800 A); CH, CHB, F and C-frame breakers in a single cutout 14.25 in across; branch space in "B" increments (4 poles 1-ph / 6 poles 3-ph). PH-L/NFB(21 in): two vertical cutouts 14.25 in across, F-frame, black handles, up to 225 A.	A	S442 p.3 Table 1; p.6; oem_spec

Breaker families associated: Cutler-Hammer CC / CCH / CHH, Cutler-Hammer CH / CHB
Key documents: S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp; S442 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,; S444 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it
Also fits this family (entry printed elsewhere): 1A32258H03, K80522, K80133, K80429, CH9CP, 52-2751

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00899	**KPHCC3175S**	Cutler-Hammer PH panelboard retrofit kit, single-mount CC breaker 3P 175 A, with cover plate	CC C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00940	**PH2CC1**	Type PH branch breaker connector/mounting kit (single-phase panel, CC/CCH/CHH)	CC, CCH, CHH A	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00942	**PH3CC3**	Type PH branch breaker connector/mounting kit (three-phase panel, CC/CCH/CHH)	CC, CCH, CHH A	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00941	**PH6E-3**	Type PH branch breaker connector/mounting kit (three-phase panel, EHD and F-Frame)	EHD and F-Frame (EHD, FDB, FD, HFD) A	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00899 KPHCC3175S Cutler-Hammer branch-connector-kit DISCONTINUED OEM ITEM

Cutler-Hammer PH panelboard retrofit kit, single-mount CC breaker 3P 175 A, with cover plate

OEM part number	KPHCC3175S	A	S444, S442 oem_spec
Description	Consistent with Eaton PH retrofit kit numbering: KPH + CC3175 (CC breaker, 3-pole, 175 A) + S (single mounting). CC/CCH/CHH single-unit retrofit kits include one breaker, copper connectors, covers, mounting brackets, hardware and installation instructions. (Specific number not printed; derived from the published numbering scheme)	A	S442 p.6 Tables 4-5; oem_spec
	PH retrofit kit single mount w/cover plate	C	S444 surplus_listing
Application	branch (single mount)	C	same as above
Installation location	Cutler-Hammer PH panelboard	C	same as above
Breaker compatibility	CC	C	same as above
Current rating	175 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CC / CCH / CHH		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*Does the kit include the CC breaker (Eaton 'retrofit kit' = breaker + connectors) or hardware only?*		

EDH-EAT-00940 PH2CC1 Cutler-Hammer branch-connector-kit LISTED AS AN ORDERABLE

Type PH branch breaker connector/mounting kit (single-phase panel, CC/CCH/CHH)

OEM part number	PH2CC1	A	S442 oem_spec
Description	Connector/mounting kit for branch breakers in Type PH panelboard: single-phase panel, CC/CCH/CHH, 240 V, 225 A, occupies all four pole spaces of one B space	A	S442 p.7 Table 6; oem_spec
Application	branch	A	S442 p.7; oem_spec
Breaker compatibility	CC, CCH, CHH	A	S442 p.7 Table 6; oem_spec
Poles	2	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and installation instructions (breaker not included)	A	S442 p.7 note; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. CH/CHB connector kits are no longer available - use F-Frame retrofit kits.	A	S442 p.7 Table 6 note a; oem_spec
Cross-links	Families: PH · Breakers: Cutler-Hammer CC / CCH / CHH		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-EAT-00942	PH3CC3	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

Type PH branch breaker connector/mounting kit (three-phase panel, CC/CCH/CHH)

OEM part number	PH3CC3	A	S442 oem_spec
Description	Connector/mounting kit for branch breakers in Type PH panelboard: three-phase panel, CC/CCH/CHH, 240 V, 225 A, occupies all six pole spaces of one B space	A	S442 p.7 Table 6; oem_spec
Application	branch	A	S442 p.7; oem_spec
Breaker compatibility	CC, CCH, CHH	A	S442 p.7 Table 6; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and installation instructions (breaker not included)	A	S442 p.7 note; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. CH/CHB connector kits are no longer available - use F-Frame retrofit kits.	A	S442 p.7 Table 6 note a; oem_spec
Cross-links	Families: PH · Breakers: Cutler-Hammer CC / CCH / CHH		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-EAT-00941	PH6E-3	Cutler-Hammer	branch-connector-kit	LISTED AS AN ORDERABLE

Type PH branch breaker connector/mounting kit (three-phase panel, EHD and F-Frame)

OEM part number	PH6E-3	A	S442, S626 oem_spec
Description	Connector/mounting kit for branch breakers in Type PH panelboard: three-phase panel, EHD and F-Frame, 600 V, 150 A per breaker (200 A max per connector), any combination of 1-, 2-, 3-pole breakers up to six poles in one B space	A	S442 p.7 Table 6; oem_spec
	Bus connection hardware for obsolete Cutler-Hammer PH panelboards; mounts two FS/FH frame breakers (inferred from aftermarket seller's description of its replacement)	C	S626 distributor
Application	branch	A	S442 p.7; oem_spec
Breaker compatibility	EHD and F-Frame (EHD, FDB, FD, HFD)	A	S442 p.7 Table 6; oem_spec
Poles	6	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and installation instructions (breaker not included)	A	S442 p.7 note; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. CH/CHB connector kits are no longer available - use F-Frame retrofit kits.	A	S442 p.7 Table 6 note a; oem_spec
Aftermarket / reproduction	Breaker King offers BPHECH (kit # PH6EK) as a replacement ('Kit # PH6EK replaces OEM PH6E3'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
Cross-links	Families: PH · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, OEM instruction document, Material		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00027	**BPHCCH**	Aftermarket bus connection kit BPHCCH (seller cross-ref to EAT PH6C3)	mounts two CC frame breakers C	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00026	**BPHECH**	Aftermarket bus connection kit BPHECH (seller cross-ref to EAT PH6E3)	mounts two FS/FH frame breakers C	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-EAT-01238	**PH6C3**	Cutler-Hammer PH panelboard twin breaker kit PH6C3 (CC frame) - per aftermarket seller cross-reference	—	unknown

EDH-OTH-00027	BPHCCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPHCCH (seller cross-ref to EAT PH6C3)

OEM part number	BPHCCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	PH6C3 [equivalent] (seller cross-reference: 'Kit # PH6CK Replaces OEM PH6C3')	C	same as above
	PH6CK [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for Cutler-Hammer PH panelboards; mounts two CC frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two CC frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM PH6C3 ('Kit # PH6CK Replaces OEM PH6C3') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PH		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00026	BPHECH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPHECH (seller cross-ref to EAT PH6E3)

OEM part number	BPHECH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	PH6E3 [equivalent] (seller cross-reference: 'Kit # PH6EK replaces OEM PH6E3')	C	same as above
	PH6EK [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for obsolete Cutler-Hammer PH panelboards; mounts two FS/FH frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two FS/FH frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM PH6E3 ('Kit # PH6EK replaces OEM PH6E3') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PH		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-EAT-01238	PH6C3	Eaton lineage	breaker-mounting-kit	STATUS UNKNOWN

Cutler-Hammer PH panelboard twin breaker kit PH6C3 (CC frame) - per aftermarket seller cross-reference

OEM part number	PH6C3 (OEM number known only from aftermarket seller cross-reference)	C	S626 distributor
Description	Bus connection hardware for Cutler-Hammer PH panelboards; mounts two CC frame breakers (inferred from aftermarket seller's description of its replacement)	C	same as above
Aftermarket / reproduction	Breaker King offers BPHCCH (kit # PH6CK) as a replacement ('Kit # PH6CK Replaces OEM PH6C3'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	same as above
Cross-links	Families: PH		
Not yet documented	Dimensions, Kit contents, Material, Status		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00933	**99-3613**	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 42 poles 400 A, box 63.00 in	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00935	**99-3613-10**	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 42 poles 600 A, box 63.00 in	—	Listed as an orderable renewal part from the Eaton Panelboar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00925	**99-3613-14**	Type PH panelboard deadfront cover kit, MLO 1-ph 3-wire 40 poles 225 A, box 50.00 in	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00932	**99-3613-15**	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 30 poles 400 A, box 54.00 in	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00934	**99-3613-18**	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 30 poles 600 A, box 54.00 in	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00929	**99-3613-2**	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 18 poles 225 A, box 34.00 in (21.00 in wide only)	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00928	**99-3613-21**	Type PH panelboard deadfront cover kit, MLO 1-ph 3-wire 28 poles 600 A, box 54.00 in	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00927	**99-3613-24**	Type PH panelboard deadfront cover kit, MLO 1-ph 3-wire 40 poles 400 A, box 63.00 in	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00926	**99-3613-31**	Type PH panelboard deadfront cover kit, MLO 1-ph 3-wire 28 poles 400 A, box 54.00 in	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00931	**99-3613-6**	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 42 poles 225 A, box 50.00 in	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00930	**99-3613-7**	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 30 poles 225 A, box 42.00 in	—	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00933 — 99-3613 — Cutler-Hammer — deadfront — LISTED AS AN ORDERABLE

Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 42 poles 400 A, box 63.00 in

OEM part number	99-3613	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PH panelboard, 21.00 in (533.4 mm) and 26.00 in (660.4 mm) wide boxes: MLO 3-ph 4-wire 42 poles 400 A, box 63.00 in	A	S442 p.8 Table 7; oem_spec
Current rating	400 A main lugs	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Main-breaker PH configurations and 800 A MLO have no listed kit (contact Sumter).	A	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CH / CHB, Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		
Open question	*Printed with no -suffix ("99-3613"); may be a truncated number. Confirm.*		

EDH-EAT-00935 — 99-3613-10 — Cutler-Hammer — deadfront — LISTED AS AN ORDERABLE

Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 42 poles 600 A, box 63.00 in

OEM part number	99-3613-10	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PH panelboard, 21.00 in (533.4 mm) and 26.00 in (660.4 mm) wide boxes: MLO 3-ph 4-wire 42 poles 600 A, box 63.00 in	A	S442 p.8 Table 7; oem_spec
Current rating	600 A main lugs	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Main-breaker PH configurations and 800 A MLO have no listed kit (contact Sumter).	A	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CH / CHB, Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00925	99-3613-14	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PH panelboard deadfront cover kit, MLO 1-ph 3-wire 40 poles 225 A, box 50.00 in

OEM part number	99-3613-14	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PH panelboard, 21.00 in (533.4 mm) and 26.00 in (660.4 mm) wide boxes: MLO 1-ph 3-wire 40 poles 225 A, box 50.00 in	A	S442 p.8 Table 7; oem_spec
Current rating	225 A main lugs	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Main-breaker PH configurations and 800 A MLO have no listed kit (contact Sumter).	A	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CH / CHB, Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00932	99-3613-15	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 30 poles 400 A, box 54.00 in

OEM part number	99-3613-15	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PH panelboard, 21.00 in (533.4 mm) and 26.00 in (660.4 mm) wide boxes: MLO 3-ph 4-wire 30 poles 400 A, box 54.00 in	A	S442 p.8 Table 7; oem_spec
Current rating	400 A main lugs	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Main-breaker PH configurations and 800 A MLO have no listed kit (contact Sumter).	A	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CH / CHB, Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00934	99-3613-18	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 30 poles 600 A, box 54.00 in

OEM part number	99-3613-18	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PH panelboard, 21.00 in (533.4 mm) and 26.00 in (660.4 mm) wide boxes: MLO 3-ph 4-wire 30 poles 600 A, box 54.00 in	A	S442 p.8 Table 7; oem_spec
Current rating	600 A main lugs	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Main-breaker PH configurations and 800 A MLO have no listed kit (contact Sumter).	A	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CH / CHB, Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00929	99-3613-2	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 18 poles 225 A, box 34.00 in (21.00 in wide only)

OEM part number	99-3613-2	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PH panelboard, 21.00 in (533.4 mm) and 26.00 in (660.4 mm) wide boxes: MLO 3-ph 4-wire 18 poles 225 A, box 34.00 in (21.00 in wide only)	A	S442 p.8 Table 7; oem_spec
Current rating	225 A main lugs	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Main-breaker PH configurations and 800 A MLO have no listed kit (contact Sumter).	A	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CH / CHB, Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00928	99-3613-21	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PH panelboard deadfront cover kit, MLO 1-ph 3-wire 28 poles 600 A, box 54.00 in

OEM part number	99-3613-21	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PH panelboard, 21.00 in (533.4 mm) and 26.00 in (660.4 mm) wide boxes: MLO 1-ph 3-wire 28 poles 600 A, box 54.00 in	A	S442 p.8 Table 7; oem_spec
Current rating	600 A main lugs	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Main-breaker PH configurations and 800 A MLO have no listed kit (contact Sumter).	A	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CH / CHB, Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00927	99-3613-24	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PH panelboard deadfront cover kit, MLO 1-ph 3-wire 40 poles 400 A, box 63.00 in

OEM part number	99-3613-24	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PH panelboard, 21.00 in (533.4 mm) and 26.00 in (660.4 mm) wide boxes: MLO 1-ph 3-wire 40 poles 400 A, box 63.00 in	A	S442 p.8 Table 7; oem_spec
Current rating	400 A main lugs	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Main-breaker PH configurations and 800 A MLO have no listed kit (contact Sumter).	A	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CH / CHB, Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00926	99-3613-31	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PH panelboard deadfront cover kit, MLO 1-ph 3-wire 28 poles 400 A, box 54.00 in

OEM part number	99-3613-31	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PH panelboard, 21.00 in (533.4 mm) and 26.00 in (660.4 mm) wide boxes: MLO 1-ph 3-wire 28 poles 400 A, box 54.00 in	A	S442 p.8 Table 7; oem_spec
Current rating	400 A main lugs	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Main-breaker PH configurations and 800 A MLO have no listed kit (contact Sumter).	A	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CH / CHB, Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00931	99-3613-6	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 42 poles 225 A, box 50.00 in

OEM part number	99-3613-6	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PH panelboard, 21.00 in (533.4 mm) and 26.00 in (660.4 mm) wide boxes: MLO 3-ph 4-wire 42 poles 225 A, box 50.00 in	A	S442 p.8 Table 7; oem_spec
Current rating	225 A main lugs	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Main-breaker PH configurations and 800 A MLO have no listed kit (contact Sumter).	A	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CH / CHB, Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

EDH-EAT-00930	99-3613-7	Cutler-Hammer	deadfront	LISTED AS AN ORDERABLE

Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 30 poles 225 A, box 42.00 in

OEM part number	99-3613-7	A	S442 oem_spec
Description	Deadfront cover kit for Cutler-Hammer Type PH panelboard, 21.00 in (533.4 mm) and 26.00 in (660.4 mm) wide boxes: MLO 3-ph 4-wire 30 poles 225 A, box 42.00 in	A	S442 p.8 Table 7; oem_spec
Current rating	225 A main lugs	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed. Main-breaker PH configurations and 800 A MLO have no listed kit (contact Sumter).	A	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CH / CHB, Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Finish / plating, OEM instruction document, Kit contents, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00944	**47-15718-2**	PH-L and NFB 21.00 in wide blank filler plate	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00937	**47-28007**	Type PH panelboard PH breaker cover plate, single-phase	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00938	**47-28008**	Type PH panelboard PH breaker cover plate, three-phase	—	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00936	**47-28266**	Type PH panelboard PH breaker cover plate, F- and C-Frame breakers	—	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00944	47-15718-2	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

PH-L and NFB 21.00 in wide blank filler plate

OEM part number	47-15718-2	A	S442 oem_spec
Description	21.00-inch (533.4 mm) wide blank filler plate for PH-L panelboards and 21.00 in wide NFB panelboards	A	S442 p.10 Table 11; oem_spec
Dimensions	For 21.00 in (533.4 mm) wide panels (overall plate size not given)	A	same as above
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.10; oem_spec
Cross-links	Families: PH, NFB		
Not yet documented	height_increment, Material		

EDH-EAT-00937	47-28007	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type PH panelboard PH breaker cover plate, single-phase

OEM part number	47-28007	A	S442 oem_spec
Description	Type PH accessory: PH breaker cover plate, single-phase (Table 8 rows: "CH and CHB breakers CH9CP / F- and C-Frame breakers 47-28266 / Single-phase 47-28007 / Three-phase 47-28008". Layout is ambiguous whether 47-28007/-28008 are sub-rows of the F/C-frame entry.)	A	S442 p.8 Table 8; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.8; oem_spec
Cross-links	Families: PH · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Dimensions, Material, pole_width		

EDH-EAT-00938	47-28008	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type PH panelboard PH breaker cover plate, three-phase

OEM part number	47-28008	**A**	S442 oem_spec
Description	Type PH accessory: PH breaker cover plate, three-phase (Table 8 rows: "CH and CHB breakers CH9CP / F- and C-Frame breakers 47-28266 / Single-phase 47-28007 / Three-phase 47-28008". Layout is ambiguous whether 47-28007/-28008 are sub-rows of the F/C-frame entry.)	**A**	S442 p.8 Table 8; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	**A**	S442 p.8; oem_spec
Cross-links	Families: PH · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Dimensions, Material, pole_width		

EDH-EAT-00936	47-28266	Cutler-Hammer	filler-plate	LISTED AS AN ORDERABLE

Type PH panelboard PH breaker cover plate, F- and C-Frame breakers

OEM part number	47-28266	**A**	S442 oem_spec
Description	Type PH accessory: PH breaker cover plate, F- and C-Frame breakers (Table 8 rows: "CH and CHB breakers CH9CP / F- and C-Frame breakers 47-28266 / Single-phase 47-28007 / Three-phase 47-28008". Layout is ambiguous whether 47-28007/-28008 are sub-rows of the F/C-frame entry.)	**A**	S442 p.8 Table 8; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	**A**	S442 p.8; oem_spec
Cross-links	Families: PH · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Cutler-Hammer CC / CCH / CHH		
Not yet documented	Dimensions, Material, pole_width		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00939	**KPHFDB3100T**	Type PH breaker retrofit kit, FDB 3-pole 100 A, twin mount (example of KPH + breaker catalog number + S/T scheme)	240 Vac: CC, CCH 2-3P 100-225 A, CHH 2-3P 60-225 A (single mount); 277 **A**	Listed as an orderable renewal part from the Eaton Panelboar
EDH-EAT-00943	**KPH-LFDB3100T**	Type PH-L breaker retrofit kit, FDB 3-pole 100 A, twin (example of KPH-L numbering; also fits 21 in wide NFB)	277 Vac EHD/FDB/FD/HFD 1P 15-100 A; 480 Vac EHD 2-3P 15-100 A; 600 Vac **A**	Listed as an orderable renewal part from the Eaton Panelboar

EDH-EAT-00939	KPHFDB3100T	Cutler-Hammer	conversion-kit	LISTED AS AN ORDERABLE

Type PH breaker retrofit kit, FDB 3-pole 100 A, twin mount (example of KPH + breaker catalog number + S/T scheme)

OEM part number	KPHFDB3100T	**A**	S442 oem_spec
Description	PH breaker retrofit kit catalog number = "KPH" + Series C breaker catalog number (frame, poles, amperes) + mounting type (T = twin, S = single). Example given by Eaton: KPHFDB3100T (3-pole 100 A FDB). Kit includes ONE breaker, copper connectors (twin mounting for EHD/F-frame), covers, mounting brackets, hardware and instructions; each kit fills one "B" space increment (4 poles 1-phase / 6 poles 3-phase); must state 1-phase or 3-phase panel.	**A**	S442 p.6 Tables 4-5, text; oem_spec
Breaker compatibility	240 Vac: CC, CCH 2-3P 100-225 A, CHH 2-3P 60-225 A (single mount); 277 Vac: EHD/FDB/FD/HFD 1P 15-100 A twin; 480 Vac: EHD 2-3P 15-100 A twin; 600 Vac: FDB/FD/HFD 2-3P 15-100 A and 15-150 A twin	**A**	S442 p.6 Table 4; oem_spec
Kit contents	One breaker, copper connectors, covers, mounting brackets, hardware, installation instructions	**A**	S442 p.6; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	**A**	same as above
Cross-links	Families: PH · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material		
Open question	*Exact list of valid KPH numbers is in PL01400003E (not obtained).*		

EDH-EAT-00943	KPH-LFDB3100T	Cutler-Hammer	conversion-kit	LISTED AS AN ORDERABLE

Type PH-L breaker retrofit kit, FDB 3-pole 100 A, twin (example of KPH-L numbering; also fits 21 in wide NFB)

OEM part number	KPH-LFDB3100T	A	S442 oem_spec
Description	PH-L retrofit kit catalog number = "KPH-L" + breaker catalog number + mounting type T (twin). Example KPH-LFDB3100T. Kit includes one breaker, copper connectors for twin mounting, hardware, mounting brackets and instructions; blank filler plates not included. PH-L retrofit kits and blank filler also fit 21.00 in wide NFB panelboards.	A	S442 p.10 Tables 9-10; oem_spec
Breaker compatibility	277 Vac EHD/FDB/FD/HFD 1P 15-100 A; 480 Vac EHD 2-3P 15-100 A; 600 Vac FDB/FD/HFD 2-3P 15-100 A and 15-150 A; all twin	A	S442 p.10 Table 9; oem_spec
Status	Listed as an orderable renewal part from the Eaton Panelboard and Switchboard Aftermarket Product Center, Sumter SC (RP01400003E, Feb 2013); current availability not confirmed	A	S442 p.10; oem_spec
Cross-links	Families: PH, NFB · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material		

3.17 PRC — Pow-R-Command lighting control panelboard

FAM-EAT-016 · panelboard · aka Pow-R-Command, PRCE · markings: Cutler-Hammer, Eaton

Lighting control panelboard based on PRL3a/3X chassis; renewal parts (connector kits, grounds, SE kits, deadfronts, trim locks) are per PRL3X/PRL3a section.

Attribute	Value	Cl.	Sources
Status	Current (Pow-R-Command E series in 2020 catalog)	A	S6 oem_spec
Era of manufacture	Introduced March 1996	A	S1, S2 p.2; oem_spec
Voltage rating	240 or 480Y/277 Vac	A	S6 p.V2-T3-3; oem_spec
Main ampacity	400 A max MLO/main	A	S6 oem_spec
Branch breakers accepted	Bolt-on breakers 225 A max incl. remote-operated breakers	A	same as above

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control

Also fits this family (entry printed elsewhere): KPRL3ABA06, KPRL3ABA06-1, KPRL3ABA12, KPRL3ABA12-1, KPRL3ABA18, KPRL3ABA18-1, KPRL3ABA24, KPRL3ABA24-1, KPRL3AGB06, KPRL3AGB06-1, KPRL3AGB12, KPRL3AGB12-1, KPRL3AGB18, KPRL3AGB18-1, KPRL3AGB24, KPRL3AGB24-1, 5078A98, 5158C05, 2C11296, 6559C59, 4176B72, 4180B91

3.18 PRL-LX — Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)

FAM-EAT-010 · panelboard · aka PRL1X-LX, PRL1a-LX, PRL2X-LX, PRL2a-LX, column panelboard · markings: Cutler-Hammer, Eaton

Narrow column-width lighting panels (box YSC969-YSC990, trims LTC/LTCD). Renewal parts listed are boxes and trims only.

Attribute	Value	Cl.	Sources
Status	Legacy (a) / current (X)	A	S1, S6 oem_spec
Era of manufacture	PRL1a/2a-LX introduced December 1997	A	S1, S2 p.2; oem_spec
Successor	PRL1X-LX / PRL2X-LX	A	S6 oem_spec
Voltage rating	PRL1a-LX 240 Vac; PRL2a-LX 480Y/277 Vac, 125/250 Vdc	A	S7 p.22.0-5; oem_spec
Main ampacity	225 A max MLO or main	A	same as above
Branch breakers accepted	Bolt-on breakers 15-30 A (a-LX per s7) / 15-100 A (X-LX per s6)	A	S6, S7 oem_spec

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01157	**LTC969S**	Pow-R-Line column (LX) standard surface trim, top fed, 69 in	—	unknown
EDH-EAT-01159	**LTC969SB**	Pow-R-Line column (LX) standard surface trim, bottom fed, 69 in	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01162	**LTC978S**	Pow-R-Line column (LX) standard surface trim, top fed, 78 in	—	unknown
EDH-EAT-01164	**LTC978SB**	Pow-R-Line column (LX) standard surface trim, bottom fed, 78 in	—	unknown
EDH-EAT-01167	**LTC981S**	Pow-R-Line column (LX) standard surface trim, top fed, 81 in	—	unknown
EDH-EAT-01169	**LTC981SB**	Pow-R-Line column (LX) standard surface trim, bottom fed, 81 in	—	unknown
EDH-EAT-01172	**LTC990S**	Pow-R-Line column (LX) standard surface trim, top fed, 90 in	—	unknown
EDH-EAT-01174	**LTC990SB**	Pow-R-Line column (LX) standard surface trim, bottom fed, 90 in	—	unknown
EDH-EAT-01158	**LTCD969S**	Pow-R-Line column (LX) door-in-door surface trim, top fed, 69 in	—	unknown
EDH-EAT-01160	**LTCD969SB**	Pow-R-Line column (LX) door-in-door surface trim, bottom fed, 69 in	—	unknown
EDH-EAT-01163	**LTCD978S**	Pow-R-Line column (LX) door-in-door surface trim, top fed, 78 in	—	unknown
EDH-EAT-01165	**LTCD978SB**	Pow-R-Line column (LX) door-in-door surface trim, bottom fed, 78 in	—	unknown
EDH-EAT-01168	**LTCD981S**	Pow-R-Line column (LX) door-in-door surface trim, top fed, 81 in	—	unknown
EDH-EAT-01170	**LTCD981SB**	Pow-R-Line column (LX) door-in-door surface trim, bottom fed, 81 in	—	unknown
EDH-EAT-01173	**LTCD990S**	Pow-R-Line column (LX) door-in-door surface trim, top fed, 90 in	—	unknown
EDH-EAT-01175	**LTCD990SB**	Pow-R-Line column (LX) door-in-door surface trim, bottom fed, 90 in	—	unknown

EDH-EAT-01157 **LTC969S** Cutler-Hammer trim **STATUS UNKNOWN**

Pow-R-Line column (LX) standard surface trim, top fed, 69 in

OEM part number	LTC969S	**A**	S3, S16 oem_spec
Description	Column panelboard standard surface trim, top fed for YSC969 box (69.00 in high).	**A**	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01159 **LTC969SB** Cutler-Hammer trim **STATUS UNKNOWN**

Pow-R-Line column (LX) standard surface trim, bottom fed, 69 in

OEM part number	LTC969SB	**A**	S3, S16 oem_spec
Description	Column panelboard standard surface trim, bottom fed for YSC969 box (69.00 in high).	**A**	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01162 **LTC978S** Cutler-Hammer trim **STATUS UNKNOWN**

Pow-R-Line column (LX) standard surface trim, top fed, 78 in

OEM part number	LTC978S	**A**	S3, S16 oem_spec
Description	Column panelboard standard surface trim, top fed for YSC978 box (78.00 in high).	**A**	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01164	LTC978SB	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) standard surface trim, bottom fed, 78 in

OEM part number	LTC978SB	A	S3, S16 oem_spec
Description	Column panelboard standard surface trim, bottom fed for YSC978 box (78.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01167	LTC981S	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) standard surface trim, top fed, 81 in

OEM part number	LTC981S	A	S3, S16 oem_spec
Description	Column panelboard standard surface trim, top fed for YSC981 box (81.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01169	LTC981SB	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) standard surface trim, bottom fed, 81 in

OEM part number	LTC981SB	A	S3, S16 oem_spec
Description	Column panelboard standard surface trim, bottom fed for YSC981 box (81.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01172	LTC990S	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) standard surface trim, top fed, 90 in

OEM part number	LTC990S	A	S3, S16 oem_spec
Description	Column panelboard standard surface trim, top fed for YSC990 box (90.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01174	LTC990SB	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) standard surface trim, bottom fed, 90 in

OEM part number	LTC990SB	A	S3, S16 oem_spec
Description	Column panelboard standard surface trim, bottom fed for YSC990 box (90.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01158	LTCD969S	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) door-in-door surface trim, top fed, 69 in

OEM part number	LTCD969S	A	S3, S16 oem_spec
Description	Column panelboard door-in-door surface trim, top fed for YSC969 box (69.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01160	LTCD969SB	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) door-in-door surface trim, bottom fed, 69 in

OEM part number	LTCD969SB	A	S3, S16 oem_spec
Description	Column panelboard door-in-door surface trim, bottom fed for YSC969 box (69.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01163	LTCD978S	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) door-in-door surface trim, top fed, 78 in

OEM part number	LTCD978S	A	S3, S16 oem_spec
Description	Column panelboard door-in-door surface trim, top fed for YSC978 box (78.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01165	LTCD978SB	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) door-in-door surface trim, bottom fed, 78 in

OEM part number	LTCD978SB	A	S3, S16 oem_spec
Description	Column panelboard door-in-door surface trim, bottom fed for YSC978 box (78.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01168	LTCD981S	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) door-in-door surface trim, top fed, 81 in

OEM part number	LTCD981S	A	S3, S16 oem_spec
Description	Column panelboard door-in-door surface trim, top fed for YSC981 box (81.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01170	LTCD981SB	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) door-in-door surface trim, bottom fed, 81 in

OEM part number	LTCD981SB	A	S3, S16 oem_spec
Description	Column panelboard door-in-door surface trim, bottom fed for YSC981 box (81.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01173	LTCD990S	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) door-in-door surface trim, top fed, 90 in

OEM part number	LTCD990S	A	S3, S16 oem_spec
Description	Column panelboard door-in-door surface trim, top fed for YSC990 box (90.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

EDH-EAT-01175	LTCD990SB	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line column (LX) door-in-door surface trim, bottom fed, 90 in

OEM part number	LTCD990SB	A	S3, S16 oem_spec
Description	Column panelboard door-in-door surface trim, bottom fed for YSC990 box (90.00 in high).	A	S3, S16 May 2022 p.39 Table 59; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	Material		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01156	**YSC969**	Pow-R-Line column (LX) Type 1 box, 69 in high	—	unknown
EDH-EAT-01161	**YSC978**	Pow-R-Line column (LX) Type 1 box, 78 in high	—	unknown
EDH-EAT-01166	**YSC981**	Pow-R-Line column (LX) Type 1 box, 81 in high	—	unknown
EDH-EAT-01171	**YSC990**	Pow-R-Line column (LX) Type 1 box, 90 in high	—	unknown

EDH-EAT-01156	YSC969	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Pow-R-Line column (LX) Type 1 box, 69 in high

OEM part number	YSC969	A	S3, S16 oem_spec
Description	PRL1X-LX/PRL2X-LX/PRL1a-LX/PRL2a-LX column panelboard Type 1 box, 69.00 in high (top or bottom fed).	A	S3, S16 May 2022 p.39 Table 59; Oct 2017 Table 58; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	depth, Material, width		

EDH-EAT-01161	YSC978	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Pow-R-Line column (LX) Type 1 box, 78 in high

OEM part number	YSC978	A	S3, S16 oem_spec
Description	PRL1X-LX/PRL2X-LX/PRL1a-LX/PRL2a-LX column panelboard Type 1 box, 78.00 in high (top or bottom fed).	A	S3, S16 May 2022 p.39 Table 59; Oct 2017 Table 58; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	depth, Material, width		

EDH-EAT-01166	YSC981	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Pow-R-Line column (LX) Type 1 box, 81 in high

OEM part number	YSC981	A	S3, S16 oem_spec
Description	PRL1X-LX/PRL2X-LX/PRL1a-LX/PRL2a-LX column panelboard Type 1 box, 81.00 in high (top or bottom fed).	A	S3, S16 May 2022 p.39 Table 59; Oct 2017 Table 58; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	depth, Material, width		

EDH-EAT-01171	YSC990	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Pow-R-Line column (LX) Type 1 box, 90 in high

OEM part number	YSC990	A	S3, S16 oem_spec
Description	PRL1X-LX/PRL2X-LX/PRL1a-LX/PRL2a-LX column panelboard Type 1 box, 90.00 in high (top or bottom fed).	A	S3, S16 May 2022 p.39 Table 59; Oct 2017 Table 58; oem_spec
Cross-links	Families: PRL-LX		
Not yet documented	depth, Material, width		

3.19 PRL-RETRO — Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)

FAM-EAT-030 · panelboard · aka P1R, P1RB, P1RL, P2R, P2RB, P2RL, PRL1R, PRL2R, Pow-R-Line 1R, Pow-R-Line 2R, Pow-R-Line Retrofit

Cutler-Hammer/Eaton (Canada) retrofit interiors for installation into existing panelboard enclosures; P1R 240 Vac max, P2R 347/600 Vac max. Mains: lugs (100/225/400 A), BAB (P1R) or GBH/GHB (P2R) 60-100 A, or E/F-frame 60-225 A.

Eaton CA08104001E (Jan 2018) catalogs the Pow-R-Line 1R (240 Vac max; BAB/QBHW/QBGF/QBCAF branch breakers, 15-100 A bolt-on; mains BAB/QBHW 100 A or EHD/FDB/FD/HFD/FDC/ED/EDB/EDS/EDH/EDC 100-225 A; MLO 100-400 A) and Pow-R-Line 2R (480Y/277 Vac max; GHQ/GHB/GHB-HID/GHBGFEP/HGHB branch; mains GHB 100 A or FDB/FD/HFD/FDC 150-225 A; MLO 100-225 A) as factory-assembled interiors and trims custom-built to bolt into most any manufacturer's existing enclosure (4.50-6.00 in deep; optional brackets deeper; collar adapters shallower). UL and CSA labelled; Eaton states they are the only panelboards listed for retrofit use in other manufacturers' enclosures.

Attribute	Value	Cl.	Sources
Voltage rating	1R: 240 Vac max (3ph4w 208Y/120, 240/120 delta, 1ph3w 120/240, 1ph2w 120, 3ph3w 208/240). 2R: 480Y/277 Vac max plus the 1R services.	A	S7 pp. 22.6-1, 22.6-3; oem_spec
Bus joint torque	Bus bar connections (Cu or Al): #10 30 lb-in (2.5 lb-ft, 3.4 N-m); 1/4 in 65 lb-in (5.4 lb-ft, 7.3 N-m); 5/16 in 130 lb-in (10.8 lb-ft, 14.7 N-m); 3/8 in 240 lb-in (20 lb-ft, 27.1 N-m); 1/2 in 600 lb-in (50 lb-ft, 67.8 N-m)	A	S246, S247 IL01417001E Appendix Table 2 (p.13); PUB50895 Appendix Table 4; oem_spec
Mounting	Interior mounted with #10-32 hardware: drill and tap 10-32 holes at minimum 8 mounting locations in back of existing enclosure; depth-adjustment bracket #10-32 screws torqued to 24 in-lb; one existing mounting stud or supplied bonding wire/lug used to bond chassis to enclosure.	A	S246, S247 IL01417001E pp.5-6; PUB50895 pp.6-7; oem_spec
	Existing mounting hardware may usually be removed; backpan may need attachment using at least one existing stud for grounding per local code. Trim/door attaches directly to deadfront assembly (no external trim-fastening hardware). Interior backpan or optional mounting plates fastened to back of existing enclosure with hardware provided.	A	S7 pp. 22.6-2, 22.6-4; oem_spec
Minimum enclosure	P1RL/P1RB minimum enclosure (H x W x D, in): lug 100 A 18/30/42 ckt 19.5/26.5/33.5 x 14.25 x 4.5; lug 225 A 22/28/34 x 14.25 x 4.5; BAB main 60-100 A 19.5/26.5/33.5 x 14.25 x 4.5; E/F-frame main 60-225 A 30/36/42 x 14.25 x 4.5; lug 400 A 24-42 ckt 48 x 20.0 x 5.75. P2RL/P2RB same heights, depth 4.75 in (400 A 5.75 in), GBH/GHB main 60-100 A.	A	S246 p. 2, Installation Criteria tables; oem_spec
	CA08104001E Table 22.6-3/22.6-6 minimum enclosure (H x W x D in): MLO 100/225/400 A 18/30/42 ckt 21.00/27.00/34.00 x 14.00 x 4.50; BAB/QBHW (1R) or GHB (2R) 100 A main 21/27/34 x 14 x 4.5; F/E-frame main 18/30/42 ckt 30.00/36.00/42.00 x 14.00 x 4.50. (Differs from IL01417001E minimums, e.g. 14.25 in width - see existing claims.)	A	S7 pp. 22.6-2, 22.6-4; oem_spec
Listing / approvals	Panelboards are listed and marked with both UL and CSA labels; 'Pow-R-Line 1R and Pow-R-Line 2R Retrofit Panelboards are the only panelboards in the market listed for use in retrofit applications in other manufacturers' enclosures' (Eaton statement)	A	S7 pp. 22.0 overview, 22.6-1, 22.6-3; oem_spec
Box range	Fits existing box depths 4.50-6.00 in (114.3-152.4 mm); optional mounting brackets if enclosure deeper than 6.00 in; shallower boxes may require special collar adapters. Order data required: existing box H, W, D, flange width F or FF, plaster-line offset E, and existing interior stud locations A, B, C.	A	S7 pp. 22.6-2, 22.6-4; oem_spec
Bus	Tin-plated aluminum standard, copper optional; integral neutral; ground bar and bonding conductor included; neutral/ground convertible left-right; insulated/isolated ground optional	A	same as above
Short circuit	240 Vac: 10 kA and 22 kA fully rated; 22-200 kA series rated	A	S7 pp. 22.6-1, 22.6-3; oem_spec

Key documents: S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/; S246 IL01417001E Instruction Manual Pow-R-Line Retrofit Panelboards, P1R & P2R Retrofit Panels (IL01417; S247 PUB50895 Instruction Manual PUB50895 Pow-R-Line Retrofit Panelboards P1R 240Vac Max & P2R 347/6

3.20 PRL1/PRL2 — Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)

FAM-EAT-011 · panelboard · aka POW-R-LINE, PRL1, PRL1-LX, PRL2, Pow-R-Line 1, Pow-R-Line 2 · markings: Westinghouse

Original Westinghouse Pow-R-Line lighting panelboards on 20 in wide boxes (YS20xx, 5.75 in deep) with gutter neutral; trims LT20xxS/F. Branch connector kits hold two sets of A/B/C connectors for 12 poles, silver-plated copper suitable for Cu or Al bus, max 140 A per connector. Branch deadfronts 5156C10 (PRL1) / 5156C09 (PRL2).

Vintage Westinghouse lighting (PRL1) and 480Y/277 V (PRL2) panelboards, 20 in wide boxes, neutral at top. Replacement connector kits KPRL1BAB / KPRL2GHB mount up to 12 poles.

Evidence-only record: trademark-register entry showing POW-R-LINE registered in 1975.

Attribute	Value	Cl.	Sources
Status	Obsolete; limited renewal parts (Sumter Aftermarket Center) per Feb 2013 guide	A	S5 oem_spec
	discontinued; replaced by PRL1a / PRL2a	A	S13 p. V12-T4-8; oem_spec
Era of manufacture	Westinghouse panelboards manufactured after 1988 (1988 redesign for Series C)	A	S13 pp. V12-T4-2, V12-T4-8; oem_spec
	Pre-1993 Westinghouse (pre-'Pow-R-Line C'); surplus example PRL1 dated 9/88 (Era bracket from s1 statement that Pow-R-Line C introduced 1993; date of first PRL1 not found)	C	S5 inference
	A 'POW-R-LINE' trademark (US class 21) was registered 14 Oct 1975 (reg. 1,022,520), i.e. the name predates the 1988 Pow-R-Line redesign described in Vol 12; registrant not confirmed (Registrant not visible in snippet; attribution to Westinghouse is inference)	C	S464 inference
Successor	PRL1a / PRL2a (functional successor)	C	S1, S5 inference
Voltage rating	PRL1 240 V class (BAB); PRL2 480Y/277 (GHB) - inferred from replacement connector kits	C	S5 inference
Main ampacity	600 A maximum	A	S13 p. V12-T4-15; oem_spec
Branch breakers accepted	PRL1: BAB-family QUICKLAG; PRL2: GHB-family (from replacement connector kits KPRL1BAB / KPRL2GHB)	A	S5 p.3 Table 1; oem_spec
	PRL1: BAB, QBHW, HQP, QPHW; PRL2: GB, GHB, GHBS	A	S13 p. V12-T4-8; oem_spec
Box	20.00 in wide x 5.75 in deep boxes YS2021-YS2090 (21-90 in high)	A	S5 p.3 Table 2; oem_spec
Box width	Standard width 20.00 in; box depth 5.75 in	A	S14 pp. 2-3; oem_spec

Breaker families associated: BAB, GB, GHB family (480Y/277 bolt-on), QUICKLAG bolt-on (BAB/QBHW family)
Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S5 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD; S464 trademarkregiste0000vari_k3n0 The Trademark Register of the United States 1976 - entry 'POW-R-LINE - US 21 - 10-14-75 -
Also fits this family (entry printed elsewhere): 5158C05, 5155C81G01, K80522, 8450C62H39, 0080429

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00166	**KPRL1BAB**	Vintage Westinghouse PRL1 replacement branch connector kit (12 poles)	BAB-family QUICKLAG (inferred from catalog number; table names panel t C	Listed in RP01400002E (Feb 2013)
EDH-EAT-00167	**KPRL2GHB**	Vintage Westinghouse PRL2 replacement branch connector kit (12 poles)	GHB-family (inferred from catalog number; table names panel type only) C	Listed in RP01400002E (Feb 2013)

EDH-EAT-00166	KPRL1BAB	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL1 replacement branch connector kit (12 poles)

OEM part number	KPRL1BAB	A	S5, S14 p.3 Table 1; oem_spec
Description	Replacement connectors for PRL1: two sets of A, B, C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S5 p.3; oem_spec
	Replacement connectors for vintage PRL1: two sets of A, B and C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S14 p. 3; oem_spec
Application	branch	A	same as above
Breaker compatibility	BAB-family QUICKLAG (inferred from catalog number; table names panel type only)	C	S5 inference
Current rating	Max 140 A connected to any one connector	A	S5 p.3; oem_spec
	Maximum amperes connected to any one connector cannot exceed 140 A	A	S14 p. 3; oem_spec
Material	Silver-plated copper; suitable for copper or aluminum bus	A	S5 p.3; oem_spec
	Silver-plated copper connectors, suitable for copper or aluminum bus	A	S14 p. 3; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2 · Breakers: QUICKLAG bolt-on (BAB/QBHW family), BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00167	KPRL2GHB	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL2 replacement branch connector kit (12 poles)

OEM part number	KPRL2GHB	A	S5, S14 p.3 Table 1; oem_spec
Description	Replacement connectors for PRL2: two sets of A, B, C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S5 p.3; oem_spec
	Replacement connectors for vintage PRL2: two sets of A, B and C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S14 p. 3; oem_spec
Application	branch	A	same as above
Breaker compatibility	GHB-family (inferred from catalog number; table names panel type only)	C	S5 inference
Current rating	Max 140 A connected to any one connector	A	S5 p.3; oem_spec
	Maximum 140 A connected to any one connector	A	S14 p. 3; oem_spec
Material	Silver-plated copper; suitable for copper or aluminum bus	A	S5 p.3; oem_spec
	Silver-plated copper connectors, suitable for copper or aluminum bus	A	S14 p. 3; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2 · Breakers: GHB family (480Y/277 bolt-on), GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00239	**5158C03**	Vintage PRL1/PRL2 neutral bar, 100 A and 225 A	—	Listed Feb 2013
EDH-EAT-00439	**5158C03G01**	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)	—	unknown
EDH-EAT-00438	**5158C03G02**	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number)	—	unknown
EDH-EAT-00441	**5158C03G03**	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)	—	unknown
EDH-EAT-00440	**5158C03G04**	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number)	—	unknown
EDH-EAT-00240	**5158C04G01**	Vintage PRL1/PRL2 400/600 A neutral bar	—	Listed Feb 2013

EDH-EAT-00239	5158C03	Westinghouse	neutral-assembly	LISTED FEB 2013

Vintage PRL1/PRL2 neutral bar, 100 A and 225 A

OEM part number	5158C03	A	S5 p.4 Table 3; oem_spec
Description	Vintage PRL1/PRL2 neutral bar, 100 A and 225 A (G02 100 A >=30 in box; G01 100 A <30 in; G04 225 A >=30 in; G03 225 A <30 in)	A	same as above
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00439	5158C03G01	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)

OEM part number	5158C03G01	A	S14 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S14 style_number; p. 2 item 3; oem_spec
Description	100 A neutral bar, boxes less than 30.00 in high	A	S14 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00438	5158C03G02	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number)

OEM part number	5158C03G02	A	S14 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S14 style_number; p. 2 item 3; oem_spec
Description	100 A neutral bar, boxes 30.00 in and above	A	S14 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00441	5158C03G03	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)

OEM part number	5158C03G03	A	S14 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S14 style_number; p. 2 item 3; oem_spec
Description	225 A neutral bar, boxes less than 30.00 in high	A	S14 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00440	5158C03G04	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number)

OEM part number	5158C03G04	A	S14 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S14 style_number; p. 2 item 3; oem_spec
Description	225 A neutral bar, boxes 30.00 in and above	A	S14 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00240	5158C04G01	Westinghouse	neutral-assembly	LISTED FEB 2013

Vintage PRL1/PRL2 400/600 A neutral bar

OEM part number	5158C04G01	A	S5, S14 p.4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S14 style_number; p. 2 item 3; oem_spec
Description	Vintage PRL1/PRL2 400/600 A neutral bar	A	S5 p.4 Table 3; oem_spec
	400/600 A neutral bar	A	S14 p. 4 Table 3; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, lug_count, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00443	**5158C05G01**	PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)	—	unknown
EDH-EAT-00442	**5158C05G02**	PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)	—	unknown
EDH-EAT-00237	**5158C05G05**	Vintage PRL1/PRL2 isolated ground bar, boxes under 30 in	—	Listed Feb 2013
EDH-EAT-00444	**5158C05G06**	PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)	—	unknown

EDH-EAT-00443	5158C05G01	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)

OEM part number	5158C05G01	A	S14 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	standard ground bar, boxes less than 30.00 in high	A	S14 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

EDH-EAT-00442	5158C05G02	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)

OEM part number	5158C05G02	A	S14 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	standard ground bar, boxes 30.00 in and above	A	S14 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

EDH-EAT-00237	5158C05G05	Westinghouse	ground-bar	LISTED FEB 2013

Vintage PRL1/PRL2 isolated ground bar, boxes under 30 in

OEM part number	5158C05G05	A	S5, S14 p.5 Table 5; oem_spec
Alternate / superseded numbers	5158C05G06 (boxes 30 in and above)	A	S5 style_number; p.5; oem_spec
Description	Isolated ground bar for vintage PRL1/PRL2, boxes less than 30 in high (G06 for 30 in and above)	A	S5 p.5 Table 5; oem_spec
	isolated ground bar, boxes less than 30.00 in high	A	S14 p. 5 Table 5; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00444	5158C05G06	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)

OEM part number	5158C05G06	A	S14 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	isolated ground bar, boxes 30.00 in and above	A	S14 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Material		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00290	**5156C09**	Vintage PRL2 branch section deadfront cover	—	Listed Feb 2013
EDH-EAT-00289	**5156C10**	Vintage PRL1 branch section deadfront cover	—	Listed Feb 2013

EDH-EAT-00290	5156C09	Westinghouse	deadfront	LISTED FEB 2013

Vintage PRL2 branch section deadfront cover

OEM part number	5156C09	A	S5 p.5 Table 6; oem_spec
Alternate / superseded numbers	H01-H09 (12-60 circuits, 10-34 in high; same heights as 5156C10)	A	S5 style_number; oem_spec
Description	PRL2 branch section deadfront cover	A	same as above
Status	Listed Feb 2013	A	same as above
Cross-links	Families: PRL1/PRL2 · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00289	5156C10	Westinghouse	deadfront	LISTED FEB 2013

Vintage PRL1 branch section deadfront cover

OEM part number	5156C10	A	S5 p.5 Table 6; oem_spec
Alternate / superseded numbers	H01 12 ckt 10 in; H02 18/13 in; H03 24/16 in; H04 30/19 in; H05 36/22 in; H06 42/25 in; H07 48/28 in; H08 54/31 in; H09 60/34 in	A	S5 style_number; p.5; oem_spec
Description	PRL1 branch section deadfront cover by max number of circuits	A	S5 oem_spec
Status	Listed Feb 2013	A	same as above
Cross-links	Families: PRL1/PRL2 · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00292	**3456B35H01**	Vintage PRL1/PRL2 blank cover 6.00 in	—	Listed Feb 2013
EDH-EAT-00291	**3456B99H01**	Vintage PRL1/PRL2 blank cover 3.00 in	—	Listed Feb 2013
EDH-EAT-00293	**3456B99H05**	Vintage PRL1/PRL2 blank cover 15.00 in	—	Listed Feb 2013

EDH-EAT-00292	3456B35H01	Westinghouse	filler-plate	LISTED FEB 2013

Vintage PRL1/PRL2 blank cover 6.00 in

OEM part number	3456B35H01	A	S5, S14 p.4 Table 4; oem_spec
Description	Blank cover, height 6.00 in (152.4 mm)	A	S5, S14 oem_spec
Dimensions	Height 6.00 in (152.4 mm)	A	S5, S14 p.4; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

EDH-EAT-00291	3456B99H01	Westinghouse	filler-plate	LISTED FEB 2013

Vintage PRL1/PRL2 blank cover 3.00 in

OEM part number	3456B99H01	A	S5, S14 p.4 Table 4; oem_spec
Description	Blank cover, height 3.00 in (76.2 mm)	A	S5, S14 oem_spec
Dimensions	Height 3.00 in (76.2 mm)	A	S5, S14 p.4; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

EDH-EAT-00293	3456B99H05	Westinghouse	filler-plate	LISTED FEB 2013

Vintage PRL1/PRL2 blank cover 15.00 in

OEM part number	3456B99H05	A	S5, S14 p.4 Table 4; oem_spec
Description	Blank cover, height 15.00 in (381.0 mm)	A	S5, S14 oem_spec
Dimensions	Height 15.00 in (381.0 mm)	A	S5, S14 p.4; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00411	**114C247G01**	Vintage lighting/small power panel trim lock	—	Listed in renewal parts guide(s) s5
EDH-EAT-00412	**3457B16G01**	Vintage lighting and small panel standard trim lock	—	Listed in renewal parts guide(s) s5

EDH-EAT-00411	114C247G01	Eaton	trim	LISTED IN RENEWAL PART

Vintage lighting/small power panel trim lock

OEM part number	114C247G01	A	S5, S14 oem_spec
Description	Vintage lighting/small power panel trim lock (replacement uses WEM-3 key)	A	S5 oem_spec
	Lock used on lighting and small power panels as standard; replacement lock uses WEM-3 key	A	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
Status	Listed in renewal parts guide(s) s5	A	S5 oem_spec
	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-00412	3457B16G01	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Vintage lighting and small panel standard trim lock

OEM part number	3457B16G01	A	S5, S14 oem_spec
Description	Vintage lighting and small panel standard trim lock	A	S5 oem_spec
	Lock used on lighting and small panels as standard	A	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
Status	Listed in renewal parts guide(s) s5	A	S5 oem_spec
	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00419	**7494A11G02**	Vintage Fastrim trim clamps for B10B and PRL1/2/3	—	Listed in s5

EDH-EAT-00419	7494A11G02	Cutler-Hammer	hardware-kit	LISTED IN S5

Vintage Fastrim trim clamps for B10B and PRL1/2/3

OEM part number	7494A11G02	A	S5 oem_spec
Description	Vintage Fastrim trim clamps for B10B and PRL1/2/3 (bag of 6, 3.13 in long)	A	same as above
Status	Listed in s5	A	same as above
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00446	**414A380G01**	Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)	—	unknown
EDH-EAT-00447	**8712C73H01**	Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3	—	unknown

EDH-EAT-00446	414A380G01	Westinghouse	fastener	STATUS UNKNOWN

Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)

OEM part number	414A380G01	A	S14 p. 8 Fastrim; oem_spec
Description	Flush Fastrim uses Style Number 414A380G01 trim clamps (supplied with the trim)	A	S14 p. 8; oem_spec
Dimensions	Overall length 3.13 in (79.5 mm); used on B10B and PRL1, 2, 3 (p.19 shows a 3.13 in clamp for B10B/PRL1-3 next to 414A380G02; association with G01 inferred from layout and p.8)	C	S14 p. 19; oem_drawing
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Material		

EDH-EAT-00447	8712C73H01	Westinghouse	fastener	STATUS UNKNOWN

Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3

OEM part number	8712C73H01	A	S14 p. 8 Fastrim; oem_spec
Description	Surface Fastrim uses Style Number 8712C73H01 trim clamps; clamps included and shipped with the trim	A	S14 p. 8; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

3.21 PRL1A — Pow-R-Line 1a

FAM-EAT-001 · panelboard · aka POW-R-LINE 1A, PRL-1A, PRL1a, Pow-R-Line 1a · markings: Cutler-Hammer, Eaton

Cutler-Hammer/Eaton 240 Vac lighting & appliance panelboard on a 20 in wide box, neutral located in the side gutter. Branch QUICKLAG breakers mount horizontally on factory connector strips (bolt-on 1C96608 or plug-on 2C11642 assemblies); mains, sub-feed breakers and main/sub-feed/through-feed lugs mount vertically on KB/KL connector kits. Fully rated 10/22 kA, series rated to 200 kA at 240 Vac. Suitable for service entrance when specified (PRLSEB barrier kits, 4180B62 bonding jumper). Note: Eaton literature also uses the umbrella name 'Pow-R-Line C' for Series C breaker panelboards; that name is not unique to PRL1a and is also the name of the PRLC switchboard.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts still listed April 2021. Superseded by PRL1X (Pow-R-Line Xpert, introduced 2020; time line shows PRL1X/2X/3X/4X from May 2020)	A	S1 p.2 Table 1; oem_spec
Era of manufacture	Introduced October 1996 (Cutler-Hammer); part of 'Pow-R-Line C' line introduced 1993	A	S1, S2 s1 p.2 Table 1; s2 p.2 Table 1; oem_spec
Successor	PRL1X	A	S1, S6 s1 p.2; oem_spec
Voltage rating	240 Vac maximum	A	S7 p.22.0-5 Table 22.0-2; p.22.1-1; oem_spec
Main ampacity	Main lugs 100, 225, 400, 600 A; main breakers 100-600 A (MLO and main device 600 A max)	A	S7 p.22.1-1; oem_spec
Branch breakers accepted	Bolt-on QUICKLAG BAB/QBHW (incl. GF/AFCI/RP variants) or plug-on HQP/QPHW chassis, 15-100 A, 1-3 pole. Mains: BAB/QBHW (100 A, horizontal), EHD, FDB, FD/FDE, HFD/HFDE, FDC/FDCE, EDB, EDS, ED, EDH, EDC, JD/HJD/JDC, DK/KD/HKD/KDC, LHH, LGE/LGS/LGH/LGC/LGU	A	S7 p.22.1-1 Tables 22.1-1, 22.1-2; oem_spec
Box width	20.00 in (508.0 mm) standard width	A	S1 p.2; oem_spec
Identification features	Neutral bar in side gutter (Figure 1); same position as PRL1X/2X/2a	A	S1 p.2 Figure 1; oem_spec
Branch connector limit	Sum of horizontally twin-mounted plug-on breakers shall not exceed 140 A; CTL panels max 42 circuits per enclosure	A	S1 p.9 Table 9 notes; oem_spec

Breaker families associated: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

Also fits this family (entry printed elsewhere): GPHBOFF, PHB3, EFHB, EFPHB, EFPHBOFF, FJPHBOFF, LBHPOFF, EFPHL, FJPHL, LPHL, EFPHLOFF, FJPHLOFF, LPHLOFF, PLK55OFF

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00006	**KB11AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00005	**KB11AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00008	**KB11SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00007	**KB11SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00002	**KB13AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00001	**KB13AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00004	**KB13SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00003	**KB13SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, silver-plated copper connector	EHD, FD, HFD, FDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00014	**KB21AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00013	**KB21AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00016	**KB21SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00015	**KB21SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00010	**KB23AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00009	**KB23AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00012	**KB23SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00011	**KB23SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00022	**KB41AJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00021	**KB41AJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00030	**KB41AKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00029	**KB41AKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00024	**KB41SJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00023	**KB41SJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00032	**KB41SKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00031	**KB41SKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00018	**KB43AJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00017	**KB43AJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00026	**KB43AKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00025	**KB43AKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00020	**KB43SJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00019	**KB43SJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00028	**KB43SKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00027	**KB43SKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00006 **KB11AFB** Cutler-Hammer main-breaker-kit **LISTED AS STOCK RENEWA**

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB11AFB	**A**	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	**A**	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	**A**	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	**A**	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	**A**	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	**A**	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	**C**	S1 inference
Current rating	100 A max	**A**	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	**A**	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	**A**	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	**A**	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00005	KB11AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB11AFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00008	KB11SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB11SFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00007	KB11SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB11SFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00002	KB13AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB13AFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00001	KB13AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB13AFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00004	KB13SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB13SFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00003	KB13SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB13SFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00014	KB21AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB21AFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00013	KB21AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB21AFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00016	KB21SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB21SFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00015	KB21SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB21SFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00010	KB23AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB23AFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00009	KB23AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB23AFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00012	KB23SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB23SFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00011	KB23SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB23SFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00022	KB41AJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB41AJB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00021	KB41AJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, tin-plated aluminum connector

OEM part number	KB41AJT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00030	KB41AKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB41AKB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00029	KB41AKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, tin-plated aluminum connector

OEM part number	KB41AKT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00024	KB41SJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, silver-plated copper connector

OEM part number	KB41SJB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00023	KB41SJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, silver-plated copper connector

OEM part number	KB41SJT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00032	KB41SKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, silver-plated copper connector

OEM part number	KB41SKB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00031	KB41SKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, silver-plated copper connector

OEM part number	KB41SKT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00018	KB43AJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB43AJB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00017	KB43AJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, tin-plated aluminum connector

OEM part number	KB43AJT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00026	KB43AKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB43AKB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00025	KB43AKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, tin-plated aluminum connector

OEM part number	KB43AKT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00020	KB43SJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, silver-plated copper connector

OEM part number	KB43SJB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00019	KB43SJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, silver-plated copper connector

OEM part number	KB43SJT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00028	KB43SKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, silver-plated copper connector

OEM part number	KB43SKB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00027	KB43SKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, silver-plated copper connector

OEM part number	KB43SKT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00071	**KL11AMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00063	**KL11AMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00083	**KL11AVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00075	**KL11AVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00090	**KL11SCO**	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00086	**KL11SCS**	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00072	**KL11SMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00064	**KL11SMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00084	**KL11SVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00076	**KL11SVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00069	**KL13AMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00061	**KL13AMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00081	**KL13AVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00073	**KL13AVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00089	**KL13SCO**	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00085	**KL13SCS**	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00070	**KL13SMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00062	**KL13SMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00082	**KL13SVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00074	**KL13SVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00101	**KL21AMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00093	**KL21AMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00113	**KL21AVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00105	**KL21AVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00120	**KL21SCO**	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00116	**KL21SCS**	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00102	**KL21SMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00094	**KL21SMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00114	**KL21SVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00106	**KL21SVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00099	**KL23AMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00091	**KL23AMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00111	**KL23AVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00103	**KL23AVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00119	**KL23SCO**	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00115	**KL23SCS**	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00100	**KL23SMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00092	**KL23SMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00112	**KL23SVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00104	**KL23SVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00127	**KL41AMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00123	**KL41AMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00135	**KL41AVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00131	**KL41AVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00138	**KL41SCO**	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00128	**KL41SMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00124	**KL41SMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00136	**KL41SVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00132	**KL41SVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00125	**KL43AMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00121	**KL43AMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00133	**KL43AVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00129	**KL43AVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00137	**KL43SCO**	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00126	**KL43SMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00122	**KL43SMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00134	**KL43SVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00130	**KL43SVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00148	**KL61CMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00142	**KL61CMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00160	**KL61CVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00154	**KL61CVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00149	**KL61SMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00143	**KL61SMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00161	**KL61SVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00155	**KL61SVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00150	**KL61TMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00144	**KL61TMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00162	**KL61TVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00156	**KL61TVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00145	**KL63CMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00139	**KL63CMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00157	**KL63CVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00151	**KL63CVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00146	**KL63SMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00140	**KL63SMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00158	**KL63SVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00152	**KL63SVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00147	**KL63TMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00141	**KL63TMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00159	**KL63TVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00153	**KL63TVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00071 **KL11AMO** Cutler-Hammer main-lug-kit **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL11AMO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00063 **KL11AMS** Cutler-Hammer main-lug-kit **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL11AMS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00083	KL11AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL11AVO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00075	KL11AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL11AVS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00090	KL11SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SCO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00086	KL11SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SCS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00072	KL11SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SMO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00064	KL11SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SMS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00084	KL11SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL11SVO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00076	KL11SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL11SVS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00069	KL13AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL13AMO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00061	KL13AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL13AMS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00081	KL13AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL13AVO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00073	KL13AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL13AVS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00089	KL13SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SCO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00085	KL13SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SCS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00070	KL13SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SMO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00062	KL13SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SMS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00082	KL13SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL13SVO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00074	KL13SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL13SVS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00101	KL21AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL21AMO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00093	KL21AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL21AMS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00113	KL21AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL21AVO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00105	KL21AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL21AVS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00120	KL21SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SCO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00116	KL21SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SCS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00102	KL21SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SMO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00094	KL21SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SMS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00114	KL21SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL21SVO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00106	KL21SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL21SVS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00099	KL23AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL23AMO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00091	KL23AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL23AMS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00111	KL23AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL23AVO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00103	KL23AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL23AVS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00119	KL23SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SCO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00115	KL23SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SCS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00100	KL23SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SMO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00092	KL23SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SMS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00112	KL23SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL23SVO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00104	KL23SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL23SVS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00127	KL41AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL41AMO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00123	KL41AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL41AMS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00135	KL41AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL41AVO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00131	KL41AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL41AVS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00138	KL41SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL41SCO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00128	KL41SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL41SMO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00124	KL41SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL41SMS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00136	KL41SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL41SVO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00132	KL41SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL41SVS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00125	KL43AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL43AMO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00121	KL43AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL43AMS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00133	KL43AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL43AVO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00129	KL43AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL43AVS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00137	KL43SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL43SCO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00126	KL43SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL43SMO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00122	KL43SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL43SMS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00134	KL43SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL43SVO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00130	KL43SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL43SVS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00148	KL61CMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, bare copper connector

OEM part number	KL61CMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00142	KL61CMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, bare copper connector

OEM part number	KL61CMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00160	KL61CVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, bare copper connector

OEM part number	KL61CVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00154	KL61CVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, bare copper connector

OEM part number	KL61CVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00149	KL61SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL61SMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00143	KL61SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL61SMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00161	KL61SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL61SVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00155	KL61SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL61SVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00150	KL61TMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector

OEM part number	KL61TMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00144	KL61TMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector

OEM part number	KL61TMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00162	KL61TVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, tin-plated copper connector

OEM part number	KL61TVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00156	KL61TVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, tin-plated copper connector

OEM part number	KL61TVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00145	KL63CMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, bare copper connector

OEM part number	KL63CMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00139	KL63CMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, bare copper connector

OEM part number	KL63CMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00157	KL63CVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, bare copper connector

OEM part number	KL63CVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00151	KL63CVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, bare copper connector

OEM part number	KL63CVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00146	KL63SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL63SMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00140	KL63SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL63SMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00158	KL63SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL63SVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00152	KL63SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL63SVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00147	KL63TMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector

OEM part number	KL63TMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00141	KL63TMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector

OEM part number	KL63TMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00159	KL63TVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, tin-plated copper connector

OEM part number	KL63TVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00153	KL63TVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, tin-plated copper connector

OEM part number	KL63TVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00067	**KL11AMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00079	**KL11AVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00088	**KL11SCF**	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00068	**KL11SMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00080	**KL11SVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00065	**KL13AMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00077	**KL13AVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00087	**KL13SCF**	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00066	**KL13SMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00078	**KL13SVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00097	**KL21AMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00109	**KL21AVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00118	**KL21SCF**	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00098	**KL21SMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00110	**KL21SVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00095	**KL23AMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00107	**KL23AVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00117	**KL23SCF**	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00096	**KL23SMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00108	**KL23SVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00067	**KL11AMF**	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL11AMF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00079	KL11AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL11AVF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00088	KL11SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SCF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00068	KL11SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SMF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00080	KL11SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL11SVF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00065	KL13AMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL13AMF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00077	KL13AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL13AVF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00087	KL13SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SCF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00066	KL13SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SMF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00078	KL13SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL13SVF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00097	KL21AMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL21AMF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00109	KL21AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL21AVF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00118	KL21SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SCF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00098	KL21SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SMF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00110	KL21SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL21SVF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00095	KL23AMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL23AMF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00107	KL23AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL23AVF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00117	KL23SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SCF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00096	KL23SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SMF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00108	KL23SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL23SVF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00163	**1C96608**	PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuits)	BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP (QUICKLAG with shunt trip n A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00164	**2C11642**	PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuits)	HQP, QPHW, QHPX, QPGF, QPHGF, QPGFEP, QPHGFEP A	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00163	1C96608	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuits)

OEM part number	1C96608	A	S1, S2, S3 s1 p.8 Table 8; oem_spec
Alternate / superseded numbers	1C96608G01..G63 (odd item numbers)	A	S1 style_number; p.8 Table 8; oem_spec
Description	Horizontally mounted branch connector kit assembly for bolt-on QUICKLAG breakers; order drawing number + G item: 12/18/30/42/48/54/72/96 circuits = G01/G09/G17/G25/G33/G41/G49/G57 (3-ph tin Al); +2 = 3-ph silver Cu; +4 = 1-ph tin Al; +6 = 1-ph silver Cu	A	S1, S2 s1 p.8; oem_spec
Application	branch	A	S1 oem_spec
Installation location	Branch section, PRL1a/1X interior	A	same as above
Breaker compatibility	BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP (QUICKLAG with shunt trip needs one extra circuit)	A	S1, S2 p.8; oem_spec
Kit contents	Connector assembly only; order breakers separately	A	S1 p.8 note 4; oem_spec
Material	Tin-plated aluminum or silver-plated copper connectors (bare copper bus: use silver-plated groups)	A	S1 p.8 note 3; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.8; oem_spec
Cross-links	Families: PRL1A, PRL1X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Physical difference between 12-circuit and 96-circuit groups (strap length / number of straps) not documented.*		

EDH-EAT-00164	2C11642	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuits)

OEM part number	2C11642	A	S1, S2 s1 p.9 Table 9; oem_spec
Alternate / superseded numbers	2C11642G03, G07, G11, G15 ... G59, G63 (silver-plated copper only)	A	S1 style_number; p.9; oem_spec
Description	Plug-in QUICKLAG breaker connector assembly; only silver-plated copper groups (G03/G11/.. 3-ph; G07/G15/.. 1-ph) offered	A	S1, S2 p.9 Table 9; oem_spec
Application	branch	A	S1 oem_spec
Breaker compatibility	HQP, QPHW, QHPX, QPGF, QPHGF, QPGFEP, QPHGFEP	A	S1, S2 p.9; oem_spec
Current rating	Sum of horizontally twin-mounted breakers shall not exceed 140 A	A	S1 p.9 note 4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.9; oem_spec
Cross-links	Families: PRL1A, PRL1X · Breakers: QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00233	**1C96645**	PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 in high enclosures only	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00221	**1C96646**	PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (30-90 in enclosures)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00223	**1C96647**	PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 drawing)	—	Listed Feb 2009; replaced by 42C405x crimp neutral drawings
EDH-EAT-00224	**1C96648**	PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00225	**1C96649**	PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% neutral, mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00227	**1C96650**	PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs (2009 drawing)	—	Listed Feb 2009; replaced by 42C405x crimp neutral drawings
EDH-EAT-00228	**1C96651**	PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00229	**1C96652**	PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral, mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00231	**1C96653**	PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing)	—	Listed Feb 2009; replaced by 42C405x crimp neutral drawings
EDH-EAT-00232	**1C96654**	PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00234	**1C97022**	PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 in high enclosures only	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00222	**42C4050**	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00226	**42C4051**	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00230	**42C4052**	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A Burndy neutral	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00233	1C96645	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 in high enclosures only

OEM part number	1C96645	A	S1, S2 s1 p.14 Table 15; oem_spec
Alternate / superseded numbers	STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	A	S1 style_number; s1 p.14 Table 15; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main 100% neutral, mechanical, 21-27 in high enclosures only. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	A	S1 s1 p.14 Table 15; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00221	1C96646	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (30-90 in enclosures)

OEM part number	1C96646	A	S1, S2, S4 s1 p.11 Table 11; oem_spec
Alternate / superseded numbers	STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	A	S1 style_number; s1 p.11 Table 11; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, mechanical lugs (30-90 in enclosures). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	A	S1 s1 p.11 Table 11; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00223	1C96647	Cutler-Hammer	neutral-assembly	LISTED FEB 2009; REPLA

PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 drawing)

OEM part number	1C96647	A	S2 s2 p.12 Table 9; oem_spec
Alternate / superseded numbers	STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil [style_number]	A	same as above
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, crimp lugs (2009 drawing). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil	A	S2 s2 p.12 Table 9; oem_spec
Status	Listed Feb 2009; replaced by 42C405x crimp neutral drawings by Oct 2017 edition (Same table positions; wire ranges differ)	B	S2, S3, S1 inference
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00224	1C96648	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical lugs

OEM part number	1C96648	A	S1, S2 s1 p.11; oem_spec
Alternate / superseded numbers	STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	A	S1 style_number; s1 p.11; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, copper mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	A	S1 s1 p.11; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00225	1C96649	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% neutral, mechanical lugs

OEM part number	1C96649	A	S1, S2, S4 s1 pp.11-12 Tables 11-12; oem_spec
Alternate / superseded numbers	STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	A	S1 style_number; s1 pp.11-12 Tables 11-12; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main 200% neutral / 225 A main 100% neutral, mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	A	S1 s1 pp.11-12 Tables 11-12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00227	1C96650	Cutler-Hammer	neutral-assembly	LISTED FEB 2009; REPLA

PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs (2009 drawing)

OEM part number	1C96650	A	S2 s2 pp.12-13; oem_spec
Alternate / superseded numbers	STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil [style_number]	A	same as above
Description	PRL1a/2a/1X/2X neutral assembly: 100 A 200% / 225 A 100% neutral, crimp lugs (2009 drawing). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil	A	S2 s2 pp.12-13; oem_spec
Status	Listed Feb 2009; replaced by 42C405x crimp neutral drawings by Oct 2017 edition (Same table positions; wire ranges differ)	B	S2, S3, S1 inference
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00228	1C96651	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mechanical lugs

OEM part number	1C96651	A	S1, S2 s1 pp.11-12; oem_spec
Alternate / superseded numbers	STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	A	S1 style_number; s1 pp.11-12; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A 200% / 225 A 100% neutral, copper mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	A	S1 s1 pp.11-12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00229	1C96652	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral, mechanical lugs

OEM part number	1C96652	A	S1, S2, S4 s1 pp.12-13 Tables 12-14; oem_spec
Alternate / superseded numbers	225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	A	S1 style_number; s1 pp.12-13 Tables 12-14; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% / 400 A 100% / 600 A 100% neutral, mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: 225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	A	S1 s1 pp.12-13 Tables 12-14; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00231	1C96653	Cutler-Hammer	neutral-assembly	LISTED FEB 2009; REPLA

PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing)

OEM part number	1C96653	A	S2 s2 p.13 Table 10; oem_spec
Alternate / superseded numbers	STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2 [style_number]	A	same as above
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% neutral, crimp lugs (2009 drawing). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2	A	S2 s2 p.13 Table 10; oem_spec
Status	Listed Feb 2009; replaced by 42C405x crimp neutral drawings by Oct 2017 edition (Same table positions; wire ranges differ)	B	S2, S3, S1 inference
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00232	1C96654	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mechanical lugs

OEM part number	1C96654	A	S1, S2 s1 pp.12-13; oem_spec
Alternate / superseded numbers	STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	A	S1 style_number; s1 pp.12-13; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% / 400 A 100% neutral, copper mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	A	S1 s1 pp.12-13; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00234	1C97022	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 in high enclosures only

OEM part number	1C97022	A	S1, S2 s1 p.14 Table 15; oem_spec
Alternate / superseded numbers	STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	A	S1 style_number; s1 p.14 Table 15; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main 200% neutral, mechanical, 21-27 in high enclosures only. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	A	S1 s1 p.14 Table 15; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00222	42C4050	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs

OEM part number	42C4050	A	S1, S3 s1 p.11 Table 11; oem_spec
Alternate / superseded numbers	STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	A	S1 style_number; s1 p.11 Table 11; oem_spec
	1C96647 (Same table position in Feb 2009 edition; crimp lug ranges differ)	B	S2, S1 supersedes; inference
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, crimp lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	S1 s1 p.11 Table 11; oem_spec
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	A	S1 s1 p.11 Table 11; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00226	42C4051	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs

OEM part number	42C4051	A	S1, S3 s1 pp.11-12; oem_spec
Alternate / superseded numbers	STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	A	S1 style_number; s1 pp.11-12; oem_spec
	1C96650 (Same table position in Feb 2009 edition; crimp lug ranges differ)	B	S2, S1 supersedes; inference
Description	PRL1a/2a/1X/2X neutral assembly: 100 A 200% / 225 A 100% neutral, crimp lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	S1 s1 pp.11-12; oem_spec
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	A	S1 s1 pp.11-12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00230	42C4052	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A Burndy neutral

OEM part number	42C4052	A	S1, S3 s1 pp.12-13; oem_spec
Alternate / superseded numbers	STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	A	S1 style_number; s1 pp.12-13; oem_spec
	1C96653 (Same table position in Feb 2009 edition; crimp lug ranges differ)	B	S2, S1 supersedes; inference
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% / 400 A 100% neutral crimp; 600 A Burndy neutral. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	S1 s1 pp.12-13; oem_spec
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	A	S1 s1 pp.12-13; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00236	**2C11296**	Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00235	**5158C05**	Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00236	2C11296	Cutler-Hammer	ground-bar	LISTED AS STOCK RENEWA

Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)

OEM part number	2C11296	**A**	S1, S2, S4 s1 p.15 Table 17; p.24 Table 33; oem_spec
Alternate / superseded numbers	G01 24 in Al/Cu; G02 24 in Cu; G03 36-90 in Al/Cu; G04 36-90 in Cu	**A**	S1 style_number; p.15; oem_spec
Description	Isolated ground bar; PRL3a/3X catalog numbers 2C11296G02 (Al/Cu) and 2C11296G04 (Cu) (Table 17 (G02 = 24 in copper) conflicts with Table 33 (G02 = Al/Cu for PRL3a); s4 Pow-R-Kit lists isolated ground bar as 2C11296G03)	**A**	S1 p.24 Table 33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.15; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Resolve 2C11296 G-number conflict between Table 17 and Table 33 / Pow-R-Kit (G03).*		

EDH-EAT-00235	5158C05	Cutler-Hammer	ground-bar	LISTED AS STOCK RENEWA

Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)

OEM part number	5158C05	**A**	S1, S2, S4, S5 s1 p.15 Table 16; s1 p.24 Table 33; s5 pp.5-6; oem_spec
Alternate / superseded numbers	G01 24 in encl Al/Cu; G03 24 in Cu; G02 36-90 in encl Al/Cu; G04 36-90 in Cu (vintage PRL: G02 boxes >=30 in, G01 boxes <30 in)	**A**	S1, S5 style_number; s1 p.15; s5 p.5 Table 5; oem_spec
Description	Standard equipment ground bar; PRL3a/3X catalog numbers 5158C05G02 (Al/Cu) and 5158C05G04 (Cu only)	**A**	S1 p.15, p.24; oem_spec
Material	Aluminum/copper-rated or copper bar per G item	**A**	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.15; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL1/PRL2, PRL3, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00215	**PRLSEBFD**	Service entrance barrier kit for FD main breaker	FD (PRL1a/2a/3a); PDG2 (PRL1X/2X/3a table) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00216	**PRLSEBGHB**	Service entrance barrier kit for GHB main breaker	GHB **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00214	**PRLSEBJD**	Service entrance barrier kit for JD main breaker	JD **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00213	**PRLSEBLGKD**	Service entrance barrier kit for LG and KD main breaker	LG and KD (PRL1a/2a/3a); PDG3 (PRL1X/2X) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00215	PRLSEBFD	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for FD main breaker

OEM part number	PRLSEBFD	A	S1, S3 s1 p.16 Tables 19-20, p.25; oem_spec
Alternate / superseded numbers	UPC 786689014674	A	S251 alias; skuPage.PRLSEBFD (General/Product specifications); oem_spec
Description	Service entrance barrier for FD (PRL1a/2a/3a); PDG2 (PRL1X/2X/3a table) main breaker (service entrance main breaker kit)	A	S1 s1 p.16 Tables 19-20, p.25; oem_spec
	PRL Service Entrance Barrier, Used with FD frame (Eaton web product description)	A	S251 skuPage.PRLSEBFD (General/Product specifications); oem_spec
Application	main (service entrance)	A	S1 oem_spec
Breaker compatibility	FD (PRL1a/2a/3a); PDG2 (PRL1X/2X/3a table)	A	S1 s1 p.16 Tables 19-20, p.25; oem_spec
	FD frame (Eaton web 'Used with' attribute)	A	S251 skuPage.PRLSEBFD (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 s1 p.16 Tables 19-20, p.25; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.PRLSEBFD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 11 in, height 4.5 in, width 6.5 in, weight 4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00216	PRLSEBGHB	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for GHB main breaker

OEM part number	PRLSEBGHB	A	S1, S3, S249, S250 s1 p.16, p.25; oem_spec
Alternate / superseded numbers	UPC 786689014681	A	S251 alias; skuPage.PRLSEBGHB (General/Product specifications); oem_spec
Description	Service entrance barrier for GHB main breaker (service entrance main breaker kit)	A	S1 s1 p.16, p.25; oem_spec
	Service entrance barrier for GHB (Table 22.1-1 'Service Entrance Main Breaker Kits')	A	S249, S250 p. 4, Table 22.1-1; oem_spec
	PRL Service Entrance Barrier, Used with GHB frame (Eaton web product description)	A	S251 skuPage.PRLSEBGHB (General/Product specifications); oem_spec
Application	main (service entrance)	A	S1, S249, S250 oem_spec
Breaker compatibility	GHB	A	S1 s1 p.16, p.25; oem_spec
	Circuit breaker frame GHB	A	S249, S250 p. 4, Table 22.1-1; oem_spec
	GHB frame (Eaton web 'Used with' attribute)	A	S251 skuPage.PRLSEBGHB (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 s1 p.16, p.25; oem_spec
	Listed in current design guides DG014001EN (Nov 2024) and DG014003EN (Mar 2025)	A	S249, S250 p. 4; oem_spec

Listing / approvals	UL Listed	**A**	S251 skuPage.PRLSEBGHB (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5 in, height 7 in, width 2 in, weight 2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL4X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00214 **PRLSEBJD** Cutler-Hammer barrier **LISTED AS STOCK RENEWA**

Service entrance barrier kit for JD main breaker

OEM part number	PRLSEBJD	**A**	S1, S3 s1 p.16 Table 20, p.25 Table 36; oem_spec
Description	Service entrance barrier for JD main breaker (service entrance main breaker kit)	**A**	S1 s1 p.16 Table 20, p.25 Table 36; oem_spec
Application	main (service entrance)	**A**	S1 oem_spec
Breaker compatibility	JD	**A**	S1 s1 p.16 Table 20, p.25 Table 36; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00213	PRLSEBLGKD	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for LG and KD main breaker

OEM part number	PRLSEBLGKD	A	S1, S3 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
Alternate / superseded numbers	UPC 786689014650	A	S251 alias; skuPage.PRLSEBLGKD (General/Product specifications); oem_spec
Description	Service entrance barrier for LG and KD (PRL1a/2a/3a); PDG3 (PRL1X/2X) main breaker (service entrance main breaker kit)	A	S1 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
	PRL Service Entrance Barrier, Used with KD/LG frame (Eaton web product description)	A	S251 skuPage.PRLSEBLGKD (General/Product specifications); oem_spec
Application	main (service entrance)	A	S1 oem_spec
Breaker compatibility	LG and KD (PRL1a/2a/3a); PDG3 (PRL1X/2X)	A	S1 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
	KD/LG frame (Eaton web 'Used with' attribute)	A	S251 skuPage.PRLSEBLGKD (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.PRLSEBLGKD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.9 in, height 4.2 in, width 5.9 in, weight 1.35 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00250	**1C96619**	PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00251	**1C96620**	PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00241	**1C96638**	PRL1a/2a/1X/2X deadfront cover assembly	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00245	**4180B03**	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-2021 drawing)	—	Listed Feb 2009 and Oct 2017; not in April 2021 edition
EDH-EAT-00248	**4180B04**	PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00247	**4180B05**	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	—	Listed Feb 2009 and Oct 2017; not in April 2021 edition
EDH-EAT-00246	**4180B61**	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-2021 drawing)	—	Listed Feb 2009 and Oct 2017; not in April 2021 edition
EDH-EAT-00244	**42C7982**	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00242	**42C8072**	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00243	**42C8073**	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00250	1C96619	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)

OEM part number	1C96619	A	S1, S2 s1 p.19 Table 24; oem_spec
Alternate / superseded numbers	12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	A	S1 style_number; p.19; oem_spec
Description	Deadfront cover for horizontally mounted BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP branch section; item and quantity by branch circuit count	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00251	1C96620	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)

OEM part number	1C96620	A	S1, S2 s1 p.19 Table 24; oem_spec
Alternate / superseded numbers	12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	A	S1 style_number; p.19; oem_spec
Description	Deadfront cover for horizontally mounted GB, GHB, GHQ, GHBS branch section; item and quantity by branch circuit count	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00241	1C96638	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X deadfront cover assembly

OEM part number	1C96638	A	S1, S2, S4 s1 p.17 Table 21; oem_spec
Alternate / superseded numbers	Enclosure height 24 in G01; 36 in G02; 42 in G07; 48 in G03; 60 in G04; 72 in G05; 90 in G06	A	S1 style_number; p.17; oem_spec
Description	Deadfront cover assembly by standard enclosure height; does not apply to PRL4 sub-chassis	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00245	4180B03	Cutler-Hammer	deadfront	LISTED FEB 2009 AND OC

PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-2021 drawing)

OEM part number	4180B03	A	S2, S3 s2 p.17 Table 17; s3 p.16 Table 20; oem_spec
Alternate / superseded numbers	H01 (top and bottom)	A	S2 style_number; p.17; oem_spec
	42C8072	C	S1, S2, S3 superseded_by; inference
Description	100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover	A	S2, S3 oem_spec
Status	Listed Feb 2009 and Oct 2017; not in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00248	4180B04	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover

OEM part number	4180B04	A	S1, S2 s1 p.18 Table 23; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; p.18; oem_spec
Description	Deadfront cover, vertical 400 A MLO/SFL/TFL or J-Frame device	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.18; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00247	4180B05	Cutler-Hammer	deadfront	LISTED FEB 2009 AND OC

PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)

OEM part number	4180B05	A	S2, S3 s2 p.17 Table 17; s3 p.16 Table 20; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S2 style_number; p.17; oem_spec
	42C7982	C	S1, S2, S3 superseded_by; inference
Description	400 A MLO/TFL or K-Frame vertical device cover	A	S2, S3 oem_spec
Status	Listed Feb 2009 and Oct 2017; not in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00246	4180B61	Cutler-Hammer	deadfront	LISTED FEB 2009 AND OC

PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-2021 drawing)

OEM part number	4180B61	A	S2, S3 s2 p.17 Table 17; s3 p.16 Table 20; oem_spec
Alternate / superseded numbers	H01 (top and bottom)	A	S2 style_number; p.17; oem_spec
	42C8073	C	S1, S2, S3 superseded_by; inference
Description	225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover	A	S2, S3 oem_spec
Status	Listed Feb 2009 and Oct 2017; not in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00244	42C7982	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover

OEM part number	42C7982	A	S1 s1 pp.17-18 Tables 22-23; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; p.17-18; oem_spec
	4180B05 (4180B05 occupies the same table row in Feb 2009 and Oct 2017 editions; replaced by 42C7982 in April 2021 edition)	C	S2, S3, S1 supersedes; inference
Description	Deadfront cover for vertically mounted device: 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	A	S1 p.17-18; oem_spec
Installation location	Main/sub-feed end of deadfront	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00242	42C8072	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device cover

OEM part number	42C8072	A	S1 s1 pp.17-18 Tables 22-23; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; p.17-18; oem_spec
	4180B03 (4180B03 occupies the same table row in Feb 2009 and Oct 2017 editions; replaced by 42C8072 in April 2021 edition)	C	S2, S3, S1 supersedes; inference
Description	Deadfront cover for vertically mounted device: 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device cover	A	S1 p.17-18; oem_spec
Installation location	Main/sub-feed end of deadfront	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00243	42C8073	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device cover

OEM part number	42C8073	A	S1 s1 pp.17-18 Tables 22-23; oem_spec
Alternate / superseded numbers	H01 top, H04 bottom	A	S1 style_number; p.17-18; oem_spec
	4180B61 (4180B61 occupies the same table row in Feb 2009 and Oct 2017 editions; replaced by 42C8073 in April 2021 edition)	C	S2, S3, S1 supersedes; inference
Description	Deadfront cover for vertically mounted device: 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device cover	A	S1 p.17-18; oem_spec
Installation location	Main/sub-feed end of deadfront	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00249	**4180B08**	PRL1a/2a/1X/2X deadfront blank covers 1-16 in	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00252	**4180B52H01**	PRL1a/2a filler cover for F, J, K frame vertical device spaces	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00253	**5155C62H01**	QUICKLAG / GB / GHB 1-pole filler (branch space filler)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00249 **4180B08** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X deadfront blank covers 1-16 in

OEM part number	4180B08	A	S1, S2 s1 pp.17-18; oem_spec
Alternate / superseded numbers	H01 = 1.00 in (25.4 mm) ... H16 = 16.00 in (406.4 mm), 1 in increments	A	S1 style_number; p.17 Table 22; oem_spec
Description	Blank deadfront covers in 1 in height increments, H01-H16	A	S1, S2 oem_spec
Dimensions	Height 1.00-16.00 in by H number; width not stated	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00252 **4180B52H01** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

PRL1a/2a filler cover for F, J, K frame vertical device spaces

OEM part number	4180B52H01	A	S1, S2, S3 s1 p.19 Table 25; oem_spec
Description	Filler cover, F/J/K frame; required in addition to deadfront cover whenever MLO, SFL or TFL are specified	A	S1 p.19 note a; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00253	5155C62H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

QUICKLAG / GB / GHB 1-pole filler (branch space filler)

OEM part number	5155C62H01	A	S1, S2, S3, S4, S251 s1 p.19 Table 25; p.30 Tables 42-43; oem_spec
Alternate / superseded numbers	UPC 782116318490	A	S251 alias; skuPage.5155C62H01 (General/Product specifications); oem_spec
Description	Filler cover for QUICKLAG, GB, GHB, GHBS branch spaces (1, 2 or 3 poles per PRL3 tables); required in addition to deadfront cover whenever a branch provision is specified. Pow-R-Kit lists it as 'BAB/GHB 1-Pole Fillers'	A	S1, S4 s1 p.19, p.30; s4 p.12; oem_spec
	1 Pole Filler	A	S251 skuPage.5155C62H01 (General/Product specifications); oem_spec
Kit contents	1 Pole Filler (Eaton web 'Special features' attribute)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.19; oem_spec
	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.5155C62H01 (General/Product specifications); oem_spec
Listing / approvals	UL 67	A	S251 skuPage.5155C62H01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.5 in, height 0.25 in, width 1 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family), GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00410	**1A85194G01**	EZ Trim lock keyed WEM-2	—	Listed in renewal parts guide(s) s4
EDH-EAT-00403	**5155C81G01**	Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels	PRL1, 2, 3 and PRL1a, 2a, 3a series panels A	Listed in renewal parts guide(s) s1, s2, s4, s5
EDH-EAT-00409	**5155C81G03**	EZ Trim lock, 24-48 in	—	Listed in renewal parts guide(s) s1, s3
EDH-EAT-01176	**5155C81G04**	EZ Trim lock/latch 5155C81G04	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01177	**5155C81G05**	EZ Trim lock/latch 5155C81G05	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01178	**5155C81G06**	EZ Trim lock/latch 5155C81G06	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00407	**8450C62H39**	Trim lock for right-handed door	—	Listed in renewal parts guide(s) s4, s5
EDH-EAT-01001	**EZT2024F**	EZ Trim, unvented flush-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01000	**EZT2024S**	EZ Trim, unvented surface-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01007	**EZT2030F**	EZ Trim, unvented flush-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01006	**EZT2030S**	EZ Trim, unvented surface-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01013	**EZT2036F**	EZ Trim, unvented flush-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01012	**EZT2036S**	EZ Trim, unvented surface-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01019	**EZT2042F**	EZ Trim, unvented flush-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01018	**EZT2042S**	EZ Trim, unvented surface-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01025	**EZT2048F**	EZ Trim, unvented flush-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01024	**EZT2048S**	EZ Trim, unvented surface-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01031	**EZT2054F**	EZ Trim, unvented flush-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01030	**EZT2054S**	EZ Trim, unvented surface-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01037	**EZT2060F**	EZ Trim, unvented flush-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01036	**EZT2060S**	EZ Trim, unvented surface-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01043	**EZT2072F**	EZ Trim, unvented flush-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01042	**EZT2072S**	EZ Trim, unvented surface-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01049	**EZT2090F**	EZ Trim, unvented flush-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01048	**EZT2090S**	EZ Trim, unvented surface-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01003	**EZTV2024F**	EZ Trim, vented flush-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01002	**EZTV2024S**	EZ Trim, vented surface-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01009	**EZTV2030F**	EZ Trim, vented flush-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01008	**EZTV2030S**	EZ Trim, vented surface-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01015	**EZTV2036F**	EZ Trim, vented flush-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01014	**EZTV2036S**	EZ Trim, vented surface-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01021	**EZTV2042F**	EZ Trim, vented flush-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01020	**EZTV2042S**	EZ Trim, vented surface-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01027	**EZTV2048F**	EZ Trim, vented flush-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01026	**EZTV2048S**	EZ Trim, vented surface-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01033	**EZTV2054F**	EZ Trim, vented flush-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01032	**EZTV2054S**	EZ Trim, vented surface-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01039	**EZTV2060F**	EZ Trim, vented flush-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01038	**EZTV2060S**	EZ Trim, vented surface-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01045	**EZTV2072F**	EZ Trim, vented flush-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01044	**EZTV2072S**	EZ Trim, vented surface-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01051	**EZTV2090F**	EZ Trim, vented flush-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01050	**EZTV2090S**	EZ Trim, vented surface-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-00406	**K80133**	Trim lock for right-handed door	—	Listed in renewal parts guide(s) s1, s2

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00408	**K80429**	T-handle lock	—	Listed in renewal parts guide(s) s1, s2, s4, s5
EDH-EAT-00405	**K80522**	Trim lock for left-handed door	—	Listed in renewal parts guide(s) s1, s2, s5
EDH-EAT-01053	**LT2036S**	Pow-R-Line 1a/2a/3a standard trim, surface, 36 in high (F suffix = flush)	—	unknown
EDH-EAT-01055	**LT2042S**	Pow-R-Line 1a/2a/3a standard trim, surface, 42 in high (F suffix = flush)	—	unknown
EDH-EAT-01057	**LT2048S**	Pow-R-Line 1a/2a/3a standard trim, surface, 48 in high (F suffix = flush)	—	unknown
EDH-EAT-01059	**LT2060S**	Pow-R-Line 1a/2a/3a standard trim, surface, 60 in high (F suffix = flush)	—	unknown
EDH-EAT-01061	**LT2072S**	Pow-R-Line 1a/2a/3a standard trim, surface, 72 in high (F suffix = flush)	—	unknown
EDH-EAT-01063	**LT2090S**	Pow-R-Line 1a/2a/3a standard trim, surface, 90 in high (F suffix = flush)	—	unknown
EDH-EAT-01065	**LWPT2024**	Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 24 in high	—	unknown
EDH-EAT-01067	**LWPT2036**	Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 36 in high	—	unknown
EDH-EAT-01069	**LWPT2048**	Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 48 in high	—	unknown
EDH-EAT-01071	**LWPT2060**	Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 60 in high	—	unknown
EDH-EAT-01073	**LWPT2072**	Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 72 in high	—	unknown
EDH-EAT-01075	**LWPT2090**	Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 90 in high	—	unknown

EDH-EAT-00410 **1A85194G01** Eaton trim **LISTED IN RENEWAL PART**

EZ Trim lock keyed WEM-2

OEM part number	1A85194G01	**A**	S4 oem_spec
Description	EZ Trim lock keyed WEM-2 (standard); G03 GE75, G05 Corbin WEM-1, G09 Corbin TEU 1, G10 CAT 60	**A**	same as above
Status	Listed in renewal parts guide(s) s4	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00403	5155C81G01	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels

OEM part number	5155C81G01	A	S1, S2, S4, S5, S14, S251 oem_spec
Alternate / superseded numbers	UPC 786685357867	A	S251 alias; skuPage.5155C81G01 (General/Product specifications); oem_spec
Description	Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels (LT trims), WEM 2 key	A	S1, S2, S4, S5 oem_spec
	Present-day lock used on standard PRL1, 2 and 3; WEM 2 key — No Longer Available	A	S14 p. 19 Table 22; oem_spec
	Eaton panelboard trim lock	A	S251 skuPage.5155C81G01 (General/Product specifications); oem_spec
Breaker compatibility	PRL1, 2, 3 and PRL1a, 2a, 3a series panels (Eaton web 'Used with' attribute)	A	same as above
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
Status	Listed in renewal parts guide(s) s1, s2, s4, s5	A	S1, S2, S4, S5 oem_spec
	No Longer Available	A	S14 p. 19; oem_spec
	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.5155C81G01 (General/Product specifications); oem_spec
Listing / approvals	UL 67	A	S251 skuPage.5155C81G01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1.7 in, height 0.01 in, width 0.75 in, weight 0.13 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-00409	5155C81G03	Cutler-Hammer	trim	LISTED IN RENEWAL PART

EZ Trim lock, 24-48 in

OEM part number	5155C81G03	A	S1, S3, S251 oem_spec
Alternate / superseded numbers	UPC 786689497651	A	S251 alias; skuPage.5155C81G03 (General/Product specifications); oem_spec
Description	EZ Trim lock, 24-48 in (54-60 in: lock 5155C81G03 + latch 5155C81G05; 72-90 in: 5155C81G04 + 5155C81G06)	A	S1, S3 oem_spec
	Eaton EZ TRIM LOCK, LOCKING LATCH up to 60"	A	S251 skuPage.5155C81G03 (General/Product specifications); oem_spec
Status	Listed in renewal parts guide(s) s1, s3	A	S1, S3 oem_spec
	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.5155C81G03 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; UL approval	A	S251 skuPage.5155C81G03 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.656 in, height 0.578 in, width 1.375 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-01176	5155C81G04	Cutler-Hammer	trim	ACTIVE EATON PRODUCT P

EZ Trim lock/latch 5155C81G04

OEM part number	5155C81G04	**A**	S3, S16 oem_spec
Alternate / superseded numbers	UPC 786689527976	**A**	S251 alias; skuPage.5155C81G04 (General/Product specifications); oem_spec
Description	Panelboard EZ Trim locks: Lock 24-48 in = 5155C81G03; lock and latch 54-60 in = 5155C81G03/5155C81G05; lock and latch 72-90 in = 5155C81G04/5155C81G06. Photos label "EZ Trim lock with key" and "EZ Trim latch without key". (EZ Trim lock and latch for 72-90 in trims (used with 5155C81G06) | Additional evidence: Eaton EZ TRIM LOCK, LOCKING LATCH 72 and 90" [A, s_sku, skuPage.5155C81G04 (General/Product specifications)])	**A**	S3, S16 May 2022 p.21 Table 27; Oct 2017 Table 24; oem_spec
Kit contents	Trim lock (Eaton web 'Special features' attribute)	**A**	S251 skuPage.5155C81G04 (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	same as above
Listing / approvals	UL Listed; UL approval	**A**	S251 skuPage.5155C81G04 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.656 in, height 0.578 in, width 1.375 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, key_code		

EDH-EAT-01177	5155C81G05	Cutler-Hammer	trim	ACTIVE EATON PRODUCT P

EZ Trim lock/latch 5155C81G05

OEM part number	5155C81G05	**A**	S3, S16 oem_spec
Alternate / superseded numbers	UPC 786689527952	**A**	S251 alias; skuPage.5155C81G05 (General/Product specifications); oem_spec
Description	Panelboard EZ Trim locks: Lock 24-48 in = 5155C81G03; lock and latch 54-60 in = 5155C81G03/5155C81G05; lock and latch 72-90 in = 5155C81G04/5155C81G06. Photos label "EZ Trim lock with key" and "EZ Trim latch without key". (EZ Trim latch (without key) for 54-60 in trims (with 5155C81G03 lock) | Additional evidence: Eaton EZ TRIM LOCK, NON-LOCKING LATCH 54-60" [A, s_sku, skuPage.5155C81G05 (General/Product specifications)])	**A**	S3, S16 May 2022 p.21 Table 27; Oct 2017 Table 24; oem_spec
Kit contents	Trim lock (Eaton web 'Special features' attribute)	**A**	S251 skuPage.5155C81G05 (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	same as above
Listing / approvals	UL Listed; UL approval	**A**	S251 skuPage.5155C81G05 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.656 in, height 0.578 in, width 1.375 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, key_code		

EDH-EAT-01178	5155C81G06	Cutler-Hammer	trim	ACTIVE EATON PRODUCT P

EZ Trim lock/latch 5155C81G06

OEM part number	5155C81G06	A	S3, S16 oem_spec
Alternate / superseded numbers	UPC 786689527969	A	S251 alias; skuPage.5155C81G06 (General/Product specifications); oem_spec
Description	Panelboard EZ Trim locks: Lock 24-48 in = 5155C81G03; lock and latch 54-60 in = 5155C81G03/5155C81G05; lock and latch 72-90 in = 5155C81G04/5155C81G06. Photos label "EZ Trim lock with key" and "EZ Trim latch without key". (EZ Trim latch (without key) for 72-90 in trims (with 5155C81G04 lock) | Additional evidence: Eaton EZ TRIM LOCK, NON-LOCKING LATCH 72 and 90" [A, s_sku, skuPage.5155C81G06 (General/Product specifications)])	A	S3, S16 May 2022 p.21 Table 27; Oct 2017 Table 24; oem_spec
Kit contents	Trim lock (Eaton web 'Special features' attribute)	A	S251 skuPage.5155C81G06 (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL Listed; UL approval	A	S251 skuPage.5155C81G06 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.656 in, height 0.578 in, width 1.375 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, key_code		

EDH-EAT-00407	8450C62H39	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Trim lock for right-handed door

OEM part number	8450C62H39	A	S4, S5, S14 oem_spec
Description	Trim lock for right-handed door (vintage / 2011 listing)	A	S4, S5 oem_spec
	Trim lock for right-handed door (hinged on right side)	A	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
	3.00 x 1.38 in (76.2 x 35.1 mm) per drawing (dimension-to-part association read from figure layout)	C	S14 p. 19 drawing; oem_drawing
Status	Listed in renewal parts guide(s) s4, s5	A	S4, S5 oem_spec
	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: PRL1A, PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-01001	EZT2024F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented flush-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2024F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4258G01	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Trim (door-in-door), unvented flush-mounted, for 24 in high EZ Box. Style number 42C4258G01.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01000	EZT2024S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented surface-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2024S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4255G01	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Trim (door-in-door), unvented surface-mounted, for 24 in high EZ Box. Style number 42C4255G01.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01007	EZT2030F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented flush-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2030F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4258G02	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Trim (door-in-door), unvented flush-mounted, for 30 in high EZ Box. Style number 42C4258G02.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01006	EZT2030S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented surface-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2030S	**A**	S3, S16 oem_spec
Alternate / superseded numbers	42C4255G02	**A**	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Trim (door-in-door), unvented surface-mounted, for 30 in high EZ Box. Style number 42C4255G02.	**A**	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	**A**	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	**A**	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01013	EZT2036F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented flush-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2036F	**A**	S3, S16 oem_spec
Alternate / superseded numbers	42C4258G03	**A**	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 782116934195	**A**	S251 alias; skuPage.EZT2036F (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), unvented flush-mounted, for 36 in high EZ Box. Style number 42C4258G03. (Additional evidence: Eaton Pow-R-Xpress EZ trim flush unvented for 20"W X 36"H box WEM2 Keyed [A, s_sku, skuPage.EZT2036F (General/Product specifications)])	**A**	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	**A**	S3 p.35-36; oem_spec
Kit contents	Pow-R-Xpress (Eaton web 'Special features' attribute)	**A**	S251 skuPage.EZT2036F (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	**A**	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.EZT2036F (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 38 in, height 3 in, width 20 in, weight 28 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01012	EZT2036S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented surface-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2036S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4255G03	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 782116934201	A	S251 alias; skuPage.EZT2036S (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), unvented surface-mounted, for 36 in high EZ Box. Style number 42C4255G03. (Additional evidence: Eaton Pow-R-Xpress EZ trim surface unvented for 20"W X 36"H box WEM2 Keyed [A, s_sku, skuPage.EZT2036S (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	Pow-R Stock (Eaton web 'Special features' attribute)	A	S251 skuPage.EZT2036S (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZT2036S (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 36 in, height 1.5 in, width 20 in, weight 28 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01019	EZT2042F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented flush-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2042F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4258G04	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786685400044	A	S251 alias; skuPage.EZT2042F (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), unvented flush-mounted, for 42 in high EZ Box. Style number 42C4258G04. (Additional evidence: Eaton Pow-R-Xpress EZ trim flush unvented for 20"W X 42"H box WEM2 Keyed Pow-R Stock [A, s_sku, skuPage.EZT2042F (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	Pow-R-Xpress (Eaton web 'Special features' attribute)	A	S251 skuPage.EZT2042F (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZT2042F (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 43 in, height 2.5 in, width 20 in, weight 42 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01018	EZT2042S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented surface-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2042S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4255G04	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786685399256	A	S251 alias; skuPage.EZT2042S (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), unvented surface-mounted, for 42 in high EZ Box. Style number 42C4255G04. (Additional evidence: Eaton Pow-R-Xpress EZ trim 20"W X 42"H box WEM2 Keyed [A, s_sku, skuPage.EZT2042S (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	Pow-R-Xpress (Eaton web 'Special features' attribute)	A	S251 skuPage.EZT2042S (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZT2042S (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 43 in, height 1 in, width 20 in, weight 43 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01025	EZT2048F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented flush-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2048F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4258G05	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 782116934218	A	S251 alias; skuPage.EZT2048F (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), unvented flush-mounted, for 48 in high EZ Box. Style number 42C4258G05. (Additional evidence: Eaton Pow-R-Xpress EZ trim flush unvented, 20"W X 48"H box WEM2 Keyed for 20"W X 48"H box [A, s_sku, skuPage.EZT2048F (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	Pow-R-Xpress (Eaton web 'Special features' attribute)	A	S251 skuPage.EZT2048F (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZT2048F (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 49 in, height 2.5 in, width 20 in, weight 46 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01024	EZT2048S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented surface-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2048S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4255G05	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 782116934225	A	S251 alias; skuPage.EZT2048S (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), unvented surface-mounted, for 48 in high EZ Box. Style number 42C4255G05. (Additional evidence: Eaton Pow-R-Xpress EZ trim surface, unvented for 20"W X 48"H box WEM2 Keyed [A, s_sku, skuPage.EZT2048S (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	Pow-R-Xpress (Eaton web 'Special features' attribute)	A	S251 skuPage.EZT2048S (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZT2048S (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 48 in, height 1 in, width 20 in, weight 46 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01031	EZT2054F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented flush-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2054F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4258G06	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Trim (door-in-door), unvented flush-mounted, for 54 in high EZ Box. Style number 42C4258G06.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01030	EZT2054S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented surface-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2054S	**A**	S3, S16 oem_spec
Alternate / superseded numbers	42C4255G06	**A**	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Trim (door-in-door), unvented surface-mounted, for 54 in high EZ Box. Style number 42C4255G06.	**A**	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	**A**	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	**A**	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01037	EZT2060F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented flush-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2060F	**A**	S3, S16 oem_spec
Alternate / superseded numbers	42C4258G07	**A**	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 782116934232	**A**	S251 alias; skuPage.EZT2060F (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), unvented flush-mounted, for 60 in high EZ Box. Style number 42C4258G07. (Additional evidence: Eaton Pow-R-Xpress EZ trim flush, unvented 20"W X 60"H box WEM2 Keyed [A, s_sku, skuPage.EZT2060F (General/Product specifications)])	**A**	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	**A**	S3 p.35-36; oem_spec
Kit contents	Pow-R-Xpress (Eaton web 'Special features' attribute)	**A**	S251 skuPage.EZT2060F (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	**A**	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.EZT2060F (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 60 in, height 2.5 in, width 20 in, weight 56 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01036	EZT2060S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented surface-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2060S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4255G07	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 782116934249	A	S251 alias; skuPage.EZT2060S (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), unvented surface-mounted, for 60 in high EZ Box. Style number 42C4255G07. (Additional evidence: Eaton Pow-R-Xpress EZ trim surface, unvented for 20"W X 60"H box WEM2 Keyed [A, s_sku, skuPage.EZT2060S (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	Pow-R-Xpress (Eaton web 'Special features' attribute)	A	S251 skuPage.EZT2060S (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZT2060S (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 60 in, height 1 in, width 20 in, weight 56 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01043	EZT2072F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented flush-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2072F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4258G09	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 782116934256	A	S251 alias; skuPage.EZT2072F (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), unvented flush-mounted, for 72 in high EZ Box. Style number 42C4258G09. (Additional evidence: Eaton Pow-R-Xpress EZ trim kit flush unvented for 20"W X 72"H box WEM2 Keyed [A, s_sku, skuPage.EZT2072F (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	Pow-R-Xpress (Eaton web 'Special features' attribute)	A	S251 skuPage.EZT2072F (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZT2072F (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 72 in, height 2.5 in, width 20 in, weight 61 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01042	EZT2072S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented surface-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2072S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4255G09	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 782116934263	A	S251 alias; skuPage.EZT2072S (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), unvented surface-mounted, for 72 in high EZ Box. Style number 42C4255G09. (Additional evidence: Eaton Pow-R-Xpress EZ trim surface, unvented for 20"W X 72"H box WEM2 Keyed [A, s_sku, skuPage.EZT2072S (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	Pow-R-Xpress (Eaton web 'Special features' attribute)	A	S251 skuPage.EZT2072S (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZT2072S (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 72 in, height 1.5 in, width 20 in, weight 61 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01049	EZT2090F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented flush-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2090F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4258G12	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786685355429	A	S251 alias; skuPage.EZT2090F (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), unvented flush-mounted, for 90 in high EZ Box. Style number 42C4258G12. (Additional evidence: Eaton Pow-R-Xpress EZ trim flush unvented for 20"W X 90"H box WEM2 Keyed [A, s_sku, skuPage.EZT2090F (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	Pow-R-Xpress (Eaton web 'Special features' attribute)	A	S251 skuPage.EZT2090F (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZT2090F (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 78 in, height 2.5 in, width 20 in, weight 81 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01048	EZT2090S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, unvented surface-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZT2090S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4255G12	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786685355412	A	S251 alias; skuPage.EZT2090S (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), unvented surface-mounted, for 90 in high EZ Box. Style number 42C4255G12. (Additional evidence: Eaton Pow-R-Xpress EZ trim surface unvented for 20"W X 90"H box WEM2 Keyed [A, s_sku, skuPage.EZT2090S (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	Pow-R-Xpress (Eaton web 'Special features' attribute)	A	S251 skuPage.EZT2090S (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZT2090S (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 78 in, height 2 in, width 20 in, weight 80 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01003	EZTV2024F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented flush-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2024F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4264G01	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Trim (door-in-door), vented flush-mounted, for 24 in high EZ Box. Style number 42C4264G01.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01002	EZTV2024S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented surface-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2024S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4261G01	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Trim (door-in-door), vented surface-mounted, for 24 in high EZ Box. Style number 42C4261G01.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01009	EZTV2030F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented flush-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2030F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4264G02	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Trim (door-in-door), vented flush-mounted, for 30 in high EZ Box. Style number 42C4264G02.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01008	EZTV2030S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented surface-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2030S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4261G02	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Trim (door-in-door), vented surface-mounted, for 30 in high EZ Box. Style number 42C4261G02.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01015	EZTV2036F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented flush-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2036F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4264G03	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786689832209	A	S251 alias; skuPage.EZTV2036F (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), vented flush-mounted, for 36 in high EZ Box. Style number 42C4264G03. (Additional evidence: EATON POW-R-XPRESS EZ TRIM FLUSH VENTED 20x36 STD LOCK KEYED WEM2 PRL1A/2A/3A [A, s_sku, skuPage.EZTV2036F (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	VENTED TRIM (Eaton web 'Special features' attribute)	A	S251 skuPage.EZTV2036F (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZTV2036F (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 36 in, width 20 in, weight 36 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01014	EZTV2036S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented surface-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2036S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4261G03	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786689832193	A	S251 alias; skuPage.EZTV2036S (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), vented surface-mounted, for 36 in high EZ Box. Style number 42C4261G03. (Additional evidence: EATON POW-R-XPRESS EZ TRIM SURFACE VENTED 20x36 STD LOCK KEYED WEM2 PRL1A/2A/3A [A, s_sku, skuPage.EZTV2036S (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	VENTED TRIM (Eaton web 'Special features' attribute)	A	S251 skuPage.EZTV2036S (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZTV2036S (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 36 in, width 20 in, weight 29 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01021	EZTV2042F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented flush-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2042F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4264G04	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786689832223	A	S251 alias; skuPage.EZTV2042F (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), vented flush-mounted, for 42 in high EZ Box. Style number 42C4264G04. (Additional evidence: EATON POW-R-XPRESS EZ TRIM FLUSH VENTED 20x42 STD LOCK KEYED WEM2 PRL1A/2A/3A [A, s_sku, skuPage.EZTV2042F (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	VENTED TRIM (Eaton web 'Special features' attribute)	A	S251 skuPage.EZTV2042F (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZTV2042F (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 42 in, width 20 in, weight 46 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01020	EZTV2042S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented surface-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2042S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4261G04	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786689832216	A	S251 alias; skuPage.EZTV2042S (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), vented surface-mounted, for 42 in high EZ Box. Style number 42C4261G04. (Additional evidence: EATON POW-R-XPRESS EZ TRIM SURFACE VENTED 20x42 STD LOCK KEYED WEM2 PRL1A/2A/3A [A, s_sku, skuPage.EZTV2042S (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	VENTED TRIM (Eaton web 'Special features' attribute)	A	S251 skuPage.EZTV2042S (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZTV2042S (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 42 in, width 20 in, weight 36 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01027	EZTV2048F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented flush-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2048F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4264G05	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786689832247	A	S251 alias; skuPage.EZTV2048F (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), vented flush-mounted, for 48 in high EZ Box. Style number 42C4264G05. (Additional evidence: EATON POW-R-XPRESS EZ TRIM FLUSH VENTED 20x48 STD LOCK KEYED WEM2 PRL1A/2A/3A [A, s_sku, skuPage.EZTV2048F (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	VENTED TRIM (Eaton web 'Special features' attribute)	A	S251 skuPage.EZTV2048F (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZTV2048F (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 48 in, width 20 in, weight 48 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01026	EZTV2048S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented surface-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2048S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4261G05	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786689832230	A	S251 alias; skuPage.EZTV2048S (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), vented surface-mounted, for 48 in high EZ Box. Style number 42C4261G05. (Additional evidence: EATON POW-R-XPRESS EZ TRIM SURFACE VENTED 20x48 STD LOCK KEYED WEM2 PRL1A/2A/3A [A, s_sku, skuPage.EZTV2048S (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	VENTED TRIM (Eaton web 'Special features' attribute)	A	S251 skuPage.EZTV2048S (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZTV2048S (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 48 in, width 20 in, weight 46 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01033	EZTV2054F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented flush-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2054F	**A**	S3, S16 oem_spec
Alternate / superseded numbers	42C4264G06	**A**	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Trim (door-in-door), vented flush-mounted, for 54 in high EZ Box. Style number 42C4264G06.	**A**	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	**A**	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	**A**	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01032	EZTV2054S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented surface-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2054S	**A**	S3, S16 oem_spec
Alternate / superseded numbers	42C4261G06	**A**	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Trim (door-in-door), vented surface-mounted, for 54 in high EZ Box. Style number 42C4261G06.	**A**	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	**A**	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	**A**	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01039	EZTV2060F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented flush-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2060F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4264G07	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786689832261	A	S251 alias; skuPage.EZTV2060F (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), vented flush-mounted, for 60 in high EZ Box. Style number 42C4264G07. (Additional evidence: EATON POW-R-XPRESS EZ TRIM FLUSH VENTED 20x60 STD LOCK KEYED WEM2 PRL1A/2A/3A [A, s_sku, skuPage.EZTV2060F (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	VENTED TRIM (Eaton web 'Special features' attribute)	A	S251 skuPage.EZTV2060F (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZTV2060F (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 60 in, width 20 in, weight 56 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01038	EZTV2060S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented surface-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2060S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4261G07	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786689832254	A	S251 alias; skuPage.EZTV2060S (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), vented surface-mounted, for 60 in high EZ Box. Style number 42C4261G07. (Additional evidence: EATON POW-R-XPRESS EZ TRIM SURFACE VENTED 20x60 STD LOCK KEYED WEM2 PRL1A/2A/3A [A, s_sku, skuPage.EZTV2060S (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	VENTED TRIM (Eaton web 'Special features' attribute)	A	S251 skuPage.EZTV2060S (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZTV2060S (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 60 in, width 20 in, weight 48 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01045	EZTV2072F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented flush-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2072F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4264G09	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786689832285	A	S251 alias; skuPage.EZTV2072F (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), vented flush-mounted, for 72 in high EZ Box. Style number 42C4264G09. (Additional evidence: EATON POW-R-XPRESS EZ TRIM FLUSH VENTED 20x72 STD LOCK KEYED WEM2 PRL1A/2A/3A [A, s_sku, skuPage.EZTV2072F (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	VENTED TRIM (Eaton web 'Special features' attribute)	A	S251 skuPage.EZTV2072F (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZTV2072F (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 72 in, width 20 in, weight 70 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01044	EZTV2072S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented surface-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2072S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4261G09	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786689832278	A	S251 alias; skuPage.EZTV2072S (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), vented surface-mounted, for 72 in high EZ Box. Style number 42C4261G09. (Additional evidence: EATON POW-R-XPRESS EZ TRIM SURFACE VENTED 20x72 STD LOCK KEYED WEM2 PRL1A/2A/3A [A, s_sku, skuPage.EZTV2072S (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	VENTED TRIM (Eaton web 'Special features' attribute)	A	S251 skuPage.EZTV2072S (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZTV2072S (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 72 in, width 20 in, weight 64 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01051	EZTV2090F	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented flush-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2090F	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4264G12	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786689832308	A	S251 alias; skuPage.EZTV2090F (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), vented flush-mounted, for 90 in high EZ Box. Style number 42C4264G12. (Additional evidence: EATON POW-R-XPRESS EZ TRIM FLUSH VENTED 20x90 STD LOCK KEYED WEM2 PRL1A/2A/3A [A, s_sku, skuPage.EZTV2090F (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	VENTED TRIM (Eaton web 'Special features' attribute)	A	S251 skuPage.EZTV2090F (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZTV2090F (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 90 in, width 20 in, weight 88 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-01050	EZTV2090S	Cutler-Hammer	trim	LISTED IN CURRENT RENE

EZ Trim, vented surface-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZTV2090S	A	S3, S16 oem_spec
Alternate / superseded numbers	42C4261G12	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
	UPC 786689832292	A	S251 alias; skuPage.EZTV2090S (General/Product specifications); oem_spec
Description	EZ Trim (door-in-door), vented surface-mounted, for 90 in high EZ Box. Style number 42C4261G12. (Additional evidence: EATON POW-R-XPRESS EZ TRIM SURFACE VENTED 20x90 STD LOCK KEYED WEM2 PRL1A/2A/3A [A, s_sku, skuPage.EZTV2090S (General/Product specifications)])	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Kit contents	VENTED TRIM (Eaton web 'Special features' attribute)	A	S251 skuPage.EZTV2090S (General/Product specifications); oem_spec
Status	Listed in current renewal parts (May 2022) (Eaton web: Active Eaton product page (no Discontinued banner), accessed 2026-10-21)	A	S3 May 2022 p.36 Table 55; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.EZTV2090S (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 90 in, width 20 in, weight 81 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Finish / plating, lock, Material		
Open question	*Use EZ trim lock 5155C81G03 (24-48 in), 5155C81G03/5155C81G05 lock+latch (54-60 in), 5155C81G04/5155C81G06 (72-90 in).*		

EDH-EAT-00406	K80133	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Trim lock for right-handed door

OEM part number	K80133	A	S1, S2, S442 oem_spec
Alternate / superseded numbers	8450C62H39 (Right-hand door lock listed as K80133 (2009/2021) and 8450C62H39 (2011/2013))	C	S1, S4, S5 equivalent; inference
Description	Trim lock for right-handed door (hinged on right)	A	S1, S2 oem_spec
	Vintage Cutler-Hammer panelboard trim lock: For use on right-handed door (hinged on right side), WEN 1 key	A	S442 p.23 Table 26; oem_spec
Status	Listed in renewal parts guide(s) s1, s2	A	S1, S2 oem_spec
	Contact Sumter Aftermarket Product Center for availability (trim locks redesigned over the years)	A	S442 p.23; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL4, MP40, PB, PH, EP		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00408	K80429	Cutler-Hammer	trim	LISTED IN RENEWAL PART

T-handle lock

OEM part number	K80429	A	S1, S2, S4, S5, S442 oem_spec
Alternate / superseded numbers	0080429	B	S4, S5 alias; oem_spec
Description	T-handle lock (trims over 48 in; NEMA 12/3R trims); listed as 0080429 in 2011/2013 docs	A	S1, S2, S4, S5 oem_spec
	Vintage Cutler-Hammer panelboard trim lock: T-handle lock - at one time used on all trims over 48.00 in (1219.2 mm) high; also on outdoor (N3R) trims; WEM 1 key	A	S442 p.23 Table 26; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
Status	Listed in renewal parts guide(s) s1, s2, s4, s5	A	S1, S2, S4, S5 oem_spec
	Contact Sumter Aftermarket Product Center for availability (trim locks redesigned over the years)	A	S442 p.23; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL4, CDP, MP40, PB, PH, EP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00405	K80522	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Trim lock for left-handed door

OEM part number	K80522	A	S1, S2, S5, S14, S442 oem_spec
Description	Trim lock for left-handed door (hinged on left)	A	S1, S2, S5 oem_spec
	Trim lock for left-handed door (hinged on left side)	A	S14 p. 19 Table 22; oem_spec
	Vintage Cutler-Hammer panelboard trim lock: For use on left-handed door (hinged on left side), WEN 1 key	A	S442 p.23 Table 26; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
	3.00 x 1.38 in (76.2 x 35.1 mm) per drawing (dimension-to-part association read from figure layout)	C	S14 p. 19 drawing; oem_drawing
Status	Listed in renewal parts guide(s) s1, s2, s5	A	S1, S2, S5 oem_spec
	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
	Contact Sumter Aftermarket Product Center for availability (trim locks redesigned over the years)	A	S442 p.23; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL4, PRL1/PRL2, PRL3, CDP, FDP, MP40, PB, PH, EP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-01053	LT2036S	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line 1a/2a/3a standard trim, surface, 36 in high (F suffix = flush)

OEM part number	LT2036S	A	S7, S3 oem_spec
Alternate / superseded numbers	LT2036F (Flush-mount version)	A	S7 equivalent; Table 22.1-6; oem_spec
	LTF2036S (Fastrim version built from Eaton rule (insert F); not individually printed except for the 72 in example)	B	S3 equivalent; p.37; inference
	LTDD2036S [equivalent] (Door-in-door version per Eaton rule)	B	same as above
	LTV2036S [equivalent] (Ventilated version per Eaton rule)	B	same as above
Description	Standard ("LT") trim for 20 in wide x 36 in YS box; S = surface, F = flush (LT2036F). Variants: insert F after LT for Fastrim (concealed trim clamps included, +20% list), V for ventilated (600 A and above panels only, +10%), DD for door-in-door (piano hinge right side, +20%); Eaton example LT2072S -> LTF2072S / LTV2072S / LTDD2072S.	A	S7, S3 Tab 22 Table 22.1-6; RP01400001E May 2022 p.37; oem_spec
Installation location	Front trim over YS box	A	S7 Table 22.1-6; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	lock, Material, Status		
Open question	*Standard LT trims use trim lock 5155C81G01 (WEM 2 key) per RP01400001E Table 26.*		

EDH-EAT-01055	LT2042S	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line 1a/2a/3a standard trim, surface, 42 in high (F suffix = flush)

OEM part number	LT2042S	A	S7, S3 oem_spec
Alternate / superseded numbers	LT2042F (Flush-mount version)	A	S7 equivalent; Table 22.1-6; oem_spec
	LTF2042S (Fastrim version built from Eaton rule (insert F); not individually printed except for the 72 in example)	B	S3 equivalent; p.37; inference
	LTDD2042S [equivalent] (Door-in-door version per Eaton rule)	B	same as above
	LTV2042S [equivalent] (Ventilated version per Eaton rule)	B	same as above
Description	Standard ("LT") trim for 20 in wide x 42 in YS box; S = surface, F = flush (LT2042F). Variants: insert F after LT for Fastrim (concealed trim clamps included, +20% list), V for ventilated (600 A and above panels only, +10%), DD for door-in-door (piano hinge right side, +20%); Eaton example LT2072S -> LTF2072S / LTV2072S / LTDD2072S.	A	S7, S3 Tab 22 Table 22.1-6; RP01400001E May 2022 p.37; oem_spec
Installation location	Front trim over YS box	A	S7 Table 22.1-6; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	lock, Material, Status		
Open question	*Standard LT trims use trim lock 5155C81G01 (WEM 2 key) per RP01400001E Table 26.*		

EDH-EAT-01057	LT2048S	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line 1a/2a/3a standard trim, surface, 48 in high (F suffix = flush)

OEM part number	LT2048S	A	S7, S3 oem_spec
Alternate / superseded numbers	LT2048F (Flush-mount version)	A	S7 equivalent; Table 22.1-6; oem_spec
	LTF2048S (Fastrim version built from Eaton rule (insert F); not individually printed except for the 72 in example)	B	S3 equivalent; p.37; inference
	LTDD2048S [equivalent] (Door-in-door version per Eaton rule)	B	same as above
	LTV2048S [equivalent] (Ventilated version per Eaton rule)	B	same as above
Description	Standard ("LT") trim for 20 in wide x 48 in YS box; S = surface, F = flush (LT2048F). Variants: insert F after LT for Fastrim (concealed trim clamps included, +20% list), V for ventilated (600 A and above panels only, +10%), DD for door-in-door (piano hinge right side, +20%); Eaton example LT2072S -> LTF2072S / LTV2072S / LTDD2072S.	A	S7, S3 Tab 22 Table 22.1-6; RP01400001E May 2022 p.37; oem_spec
Installation location	Front trim over YS box	A	S7 Table 22.1-6; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	lock, Material, Status		
Open question	*Standard LT trims use trim lock 5155C81G01 (WEM 2 key) per RP01400001E Table 26.*		

EDH-EAT-01059	LT2060S	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line 1a/2a/3a standard trim, surface, 60 in high (F suffix = flush)

OEM part number	LT2060S	A	S7, S3 oem_spec
Alternate / superseded numbers	LT2060F (Flush-mount version)	A	S7 equivalent; Table 22.1-6; oem_spec
	LTF2060S (Fastrim version built from Eaton rule (insert F); not individually printed except for the 72 in example)	B	S3 equivalent; p.37; inference
	LTDD2060S [equivalent] (Door-in-door version per Eaton rule)	B	same as above
	LTV2060S [equivalent] (Ventilated version per Eaton rule)	B	same as above
Description	Standard ("LT") trim for 20 in wide x 60 in YS box; S = surface, F = flush (LT2060F). Variants: insert F after LT for Fastrim (concealed trim clamps included, +20% list), V for ventilated (600 A and above panels only, +10%), DD for door-in-door (piano hinge right side, +20%); Eaton example LT2072S -> LTF2072S / LTV2072S / LTDD2072S.	A	S7, S3 Tab 22 Table 22.1-6; RP01400001E May 2022 p.37; oem_spec
Installation location	Front trim over YS box	A	S7 Table 22.1-6; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	lock, Material, Status		
Open question	*Standard LT trims use trim lock 5155C81G01 (WEM 2 key) per RP01400001E Table 26.*		

EDH-EAT-01061	LT2072S	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line 1a/2a/3a standard trim, surface, 72 in high (F suffix = flush)

OEM part number	LT2072S	A	S7, S3 oem_spec
Alternate / superseded numbers	LT2072F (Flush-mount version)	A	S7 equivalent; Table 22.1-6; oem_spec
	LTF2072S (Fastrim version built from Eaton rule (insert F); not individually printed except for the 72 in example)	B	S3 equivalent; p.37; inference
	LTDD2072S [equivalent] (Door-in-door version per Eaton rule)	B	same as above
	LTV2072S [equivalent] (Ventilated version per Eaton rule)	B	same as above
Description	Standard ("LT") trim for 20 in wide x 72 in YS box; S = surface, F = flush (LT2072F). Variants: insert F after LT for Fastrim (concealed trim clamps included, +20% list), V for ventilated (600 A and above panels only, +10%), DD for door-in-door (piano hinge right side, +20%); Eaton example LT2072S -> LTF2072S / LTV2072S / LTDD2072S.	A	S7, S3 Tab 22 Table 22.1-6; RP01400001E May 2022 p.37; oem_spec
Installation location	Front trim over YS box	A	S7 Table 22.1-6; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	lock, Material, Status		
Open question	*Standard LT trims use trim lock 5155C81G01 (WEM 2 key) per RP01400001E Table 26.*		

EDH-EAT-01063	LT2090S	Cutler-Hammer	trim	STATUS UNKNOWN

Pow-R-Line 1a/2a/3a standard trim, surface, 90 in high (F suffix = flush)

OEM part number	LT2090S	A	S7, S3 oem_spec
Alternate / superseded numbers	LT2090F (Flush-mount version)	A	S7 equivalent; Table 22.1-6; oem_spec
	LTF2090S (Fastrim version built from Eaton rule (insert F); not individually printed except for the 72 in example)	B	S3 equivalent; p.37; inference
	LTDD2090S [equivalent] (Door-in-door version per Eaton rule)	B	same as above
	LTV2090S [equivalent] (Ventilated version per Eaton rule)	B	same as above
Description	Standard ("LT") trim for 20 in wide x 90 in YS box; S = surface, F = flush (LT2090F). Variants: insert F after LT for Fastrim (concealed trim clamps included, +20% list), V for ventilated (600 A and above panels only, +10%), DD for door-in-door (piano hinge right side, +20%); Eaton example LT2072S -> LTF2072S / LTV2072S / LTDD2072S.	A	S7, S3 Tab 22 Table 22.1-6; RP01400001E May 2022 p.37; oem_spec
Installation location	Front trim over YS box	A	S7 Table 22.1-6; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	lock, Material, Status		
Open question	*Standard LT trims use trim lock 5155C81G01 (WEM 2 key) per RP01400001E Table 26.*		

EDH-EAT-01065	LWPT2024	Cutler-Hammer	trim	STATUS UNKNOWN

Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 24 in high

OEM part number	LWPT2024	**A**	S3, S16 oem_spec
Description	Type 12/3R trim for VWPB2024 box: laser-cut trim with rounded corners, concealed hinges, T-handle lock, gasketing around trim door.	**A**	S3, S16 May 2022 p.37 Table 56; Oct 2017 Table 44; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	lock_part_number, Material		
Open question	*T-handle lock presumably K80429 (Table 26 "also used on outdoor NEMA 12/3R trims").*		

EDH-EAT-01067	LWPT2036	Cutler-Hammer	trim	STATUS UNKNOWN

Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 36 in high

OEM part number	LWPT2036	**A**	S3, S16 oem_spec
Description	Type 12/3R trim for VWPB2036 box: laser-cut trim with rounded corners, concealed hinges, T-handle lock, gasketing around trim door.	**A**	S3, S16 May 2022 p.37 Table 56; Oct 2017 Table 44; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	lock_part_number, Material		
Open question	*T-handle lock presumably K80429 (Table 26 "also used on outdoor NEMA 12/3R trims").*		

EDH-EAT-01069	LWPT2048	Cutler-Hammer	trim	STATUS UNKNOWN

Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 48 in high

OEM part number	LWPT2048	**A**	S3, S16 oem_spec
Description	Type 12/3R trim for VWPB2048 box: laser-cut trim with rounded corners, concealed hinges, T-handle lock, gasketing around trim door.	**A**	S3, S16 May 2022 p.37 Table 56; Oct 2017 Table 44; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	lock_part_number, Material		
Open question	*T-handle lock presumably K80429 (Table 26 "also used on outdoor NEMA 12/3R trims").*		

EDH-EAT-01071	LWPT2060	Cutler-Hammer	trim	STATUS UNKNOWN

Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 60 in high

OEM part number	LWPT2060	**A**	S3, S16 oem_spec
Description	Type 12/3R trim for VWPB2060 box: laser-cut trim with rounded corners, concealed hinges, T-handle lock, gasketing around trim door.	**A**	S3, S16 May 2022 p.37 Table 56; Oct 2017 Table 44; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	lock_part_number, Material		
Open question	*T-handle lock presumably K80429 (Table 26 "also used on outdoor NEMA 12/3R trims").*		

EDH-EAT-01073	LWPT2072	Cutler-Hammer	trim	STATUS UNKNOWN

Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 72 in high

OEM part number	LWPT2072	**A**	S3, S16 oem_spec
Description	Type 12/3R trim for VWPB2072 box: laser-cut trim with rounded corners, concealed hinges, T-handle lock, gasketing around trim door.	**A**	S3, S16 May 2022 p.37 Table 56; Oct 2017 Table 44; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	lock_part_number, Material		
Open question	*T-handle lock presumably K80429 (Table 26 "also used on outdoor NEMA 12/3R trims").*		

EDH-EAT-01075	LWPT2090	Cutler-Hammer	trim	STATUS UNKNOWN

Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 90 in high

OEM part number	LWPT2090	**A**	S3, S16 oem_spec
Description	Type 12/3R trim for VWPB2090 box: laser-cut trim with rounded corners, concealed hinges, T-handle lock, gasketing around trim door.	**A**	S3, S16 May 2022 p.37 Table 56; Oct 2017 Table 44; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	lock_part_number, Material		
Open question	*T-handle lock presumably K80429 (Table 26 "also used on outdoor NEMA 12/3R trims").*		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00998	**EZB2024R**	EZ Box, unpainted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01004	**EZB2030R**	EZ Box, unpainted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01010	**EZB2036R**	EZ Box, unpainted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01016	**EZB2042R**	EZ Box, unpainted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01022	**EZB2048R**	EZ Box, unpainted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01028	**EZB2054R**	EZ Box, unpainted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01034	**EZB2060R**	EZ Box, unpainted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01040	**EZB2072R**	EZ Box, unpainted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01046	**EZB2090R**	EZ Box, unpainted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-00999	**EZBP2024R**	EZ Box, painted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01005	**EZBP2030R**	EZ Box, painted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01011	**EZBP2036R**	EZ Box, painted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01017	**EZBP2042R**	EZ Box, painted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01023	**EZBP2048R**	EZ Box, painted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01029	**EZBP2054R**	EZ Box, painted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01035	**EZBP2060R**	EZ Box, painted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01041	**EZBP2072R**	EZ Box, painted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01047	**EZBP2090R**	EZ Box, painted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	—	Listed in current renewal parts (May 2022)
EDH-EAT-01064	**VWPB2024**	Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 24 x 20 x 6 in	—	unknown
EDH-EAT-01066	**VWPB2036**	Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 36 x 20 x 6 in	—	unknown
EDH-EAT-01068	**VWPB2048**	Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 48 x 20 x 6 in	—	unknown
EDH-EAT-01070	**VWPB2060**	Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 60 x 20 x 6 in	—	unknown
EDH-EAT-01072	**VWPB2072**	Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 72 x 20 x 6 in	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01074	**VWPB2090**	Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 90 x 20 x 6 in	—	unknown
EDH-EAT-01052	**YS2036**	Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 36 in high x 5.75 in deep	—	unknown
EDH-EAT-01054	**YS2042**	Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 42 in high x 5.75 in deep	—	unknown
EDH-EAT-01056	**YS2048**	Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 48 in high x 5.75 in deep	—	unknown
EDH-EAT-01058	**YS2060**	Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 60 in high x 5.75 in deep	—	unknown
EDH-EAT-01060	**YS2072**	Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 72 in high x 5.75 in deep	—	unknown
EDH-EAT-01062	**YS2090**	Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 90 in high x 5.75 in deep	—	unknown

EDH-EAT-00998 **EZB2024R** Cutler-Hammer box/enclosure **LISTED IN CURRENT RENE**

EZ Box, unpainted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZB2024R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G01	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), unpainted, for 24 in enclosure height. EZ Box and EZ Trim meet Type 1 code requirements; door-in-door standard, no exposed hardware, laser-cut trim with rounded corners. Style number 42C1999G01.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, knockouts, Material, width		

EDH-EAT-01004 **EZB2030R** Cutler-Hammer box/enclosure **LISTED IN CURRENT RENE**

EZ Box, unpainted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZB2030R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G02	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), unpainted, for 30 in enclosure height. EZ Box and EZ Trim meet Type 1 code requirements; door-in-door standard, no exposed hardware, laser-cut trim with rounded corners. Style number 42C1999G02.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, knockouts, Material, width		

EDH-EAT-01010	EZB2036R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, unpainted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZB2036R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G03	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), unpainted, for 36 in enclosure height. EZ Box and EZ Trim meet Type 1 code requirements; door-in-door standard, no exposed hardware, laser-cut trim with rounded corners. Style number 42C1999G03.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, knockouts, Material, width		

EDH-EAT-01016	EZB2042R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, unpainted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZB2042R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G04	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), unpainted, for 42 in enclosure height. EZ Box and EZ Trim meet Type 1 code requirements; door-in-door standard, no exposed hardware, laser-cut trim with rounded corners. Style number 42C1999G04.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, knockouts, Material, width		

EDH-EAT-01022	EZB2048R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, unpainted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZB2048R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G05	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), unpainted, for 48 in enclosure height. EZ Box and EZ Trim meet Type 1 code requirements; door-in-door standard, no exposed hardware, laser-cut trim with rounded corners. Style number 42C1999G05.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, knockouts, Material, width		

EDH-EAT-01028	EZB2054R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, unpainted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZB2054R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G06	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), unpainted, for 54 in enclosure height. EZ Box and EZ Trim meet Type 1 code requirements; door-in-door standard, no exposed hardware, laser-cut trim with rounded corners. Style number 42C1999G06.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, knockouts, Material, width		

EDH-EAT-01034	EZB2060R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, unpainted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZB2060R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G07	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), unpainted, for 60 in enclosure height. EZ Box and EZ Trim meet Type 1 code requirements; door-in-door standard, no exposed hardware, laser-cut trim with rounded corners. Style number 42C1999G07.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, knockouts, Material, width		

EDH-EAT-01040	EZB2072R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, unpainted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZB2072R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G09	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), unpainted, for 72 in enclosure height. EZ Box and EZ Trim meet Type 1 code requirements; door-in-door standard, no exposed hardware, laser-cut trim with rounded corners. Style number 42C1999G09.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, knockouts, Material, width		

EDH-EAT-01046	EZB2090R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, unpainted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZB2090R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G12	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), unpainted, for 90 in enclosure height. EZ Box and EZ Trim meet Type 1 code requirements; door-in-door standard, no exposed hardware, laser-cut trim with rounded corners. Style number 42C1999G12.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, knockouts, Material, width		

EDH-EAT-00999	EZBP2024R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, painted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZBP2024R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G13	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), painted, for 24 in enclosure height. Style number 42C1999G13.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, Material, width		

EDH-EAT-01005	EZBP2030R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, painted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZBP2030R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G14	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), painted, for 30 in enclosure height. Style number 42C1999G14.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, Material, width		

EDH-EAT-01011	EZBP2036R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, painted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZBP2036R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G15	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), painted, for 36 in enclosure height. Style number 42C1999G15.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, Material, width		

EDH-EAT-01017	EZBP2042R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, painted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZBP2042R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G16	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), painted, for 42 in enclosure height. Style number 42C1999G16.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, Material, width		

EDH-EAT-01023	EZBP2048R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, painted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZBP2048R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G17	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), painted, for 48 in enclosure height. Style number 42C1999G17.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, Material, width		

EDH-EAT-01029	EZBP2054R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, painted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZBP2054R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G18	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), painted, for 54 in enclosure height. Style number 42C1999G18.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, Material, width		

EDH-EAT-01035	EZBP2060R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, painted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZBP2060R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G19	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), painted, for 60 in enclosure height. Style number 42C1999G19.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, Material, width		

EDH-EAT-01041	EZBP2072R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, painted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZBP2072R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G21	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), painted, for 72 in enclosure height. Style number 42C1999G21.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, Material, width		

EDH-EAT-01047	EZBP2090R	Cutler-Hammer	box/enclosure	LISTED IN CURRENT RENE

EZ Box, painted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)

OEM part number	EZBP2090R	A	S3, S16 oem_spec
Alternate / superseded numbers	42C1999G24	A	S3 style_number; May 2022 p.36 Table 55; oem_spec
Description	EZ Box (Type 1), painted, for 90 in enclosure height. Style number 42C1999G24.	A	S3, S16 May 2022 p.36 Table 55; Oct 2017 Table 43; oem_spec
Installation location	PRL1a/2a/3a and PRL1X/2X/3X lighting panelboard enclosure (20 in wide EZ Box family)	A	S3 p.35-36; oem_spec
Status	Listed in current renewal parts (May 2022)	A	S3 May 2022 p.36 Table 55; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	depth, Material, width		

EDH-EAT-01064	VWPB2024	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 24 x 20 x 6 in

OEM part number	VWPB2024	A	S3, S16 oem_spec
Description	Type 12/3R enclosure box (code-gauge steel, gasketed, with dripshield, painted ANSI-61), 24.00 x 20.00 x 6.00 in (H x W x D); complete enclosure = box + trim LWPT2024.	A	S3, S16 May 2022 p.37 Table 56; Oct 2017 Table 44; oem_spec
Material	Code gauge steel, gasketed, dripshield	A	S3 p.37; oem_spec
Finish / plating	ANSI-61 paint	A	same as above
Dimensions	24.00 in H x 20.00 in W x 6.00 in D	A	S3 p.37 Table 56; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	knockouts		

EDH-EAT-01066	VWPB2036	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 36 x 20 x 6 in

OEM part number	VWPB2036	A	S3, S16 oem_spec
Description	Type 12/3R enclosure box (code-gauge steel, gasketed, with dripshield, painted ANSI-61), 36.00 x 20.00 x 6.00 in (H x W x D); complete enclosure = box + trim LWPT2036.	A	S3, S16 May 2022 p.37 Table 56; Oct 2017 Table 44; oem_spec
Material	Code gauge steel, gasketed, dripshield	A	S3 p.37; oem_spec
Finish / plating	ANSI-61 paint	A	same as above
Dimensions	36.00 in H x 20.00 in W x 6.00 in D	A	S3 p.37 Table 56; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	knockouts		

EDH-EAT-01068	VWPB2048	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 48 x 20 x 6 in

OEM part number	VWPB2048	A	S3, S16 oem_spec
Description	Type 12/3R enclosure box (code-gauge steel, gasketed, with dripshield, painted ANSI-61), 48.00 x 20.00 x 6.00 in (H x W x D); complete enclosure = box + trim LWPT2048.	A	S3, S16 May 2022 p.37 Table 56; Oct 2017 Table 44; oem_spec
Material	Code gauge steel, gasketed, dripshield	A	S3 p.37; oem_spec
Finish / plating	ANSI-61 paint	A	same as above
Dimensions	48.00 in H x 20.00 in W x 6.00 in D	A	S3 p.37 Table 56; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	knockouts		

EDH-EAT-01070	VWPB2060	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 60 x 20 x 6 in

OEM part number	VWPB2060	A	S3, S16 oem_spec
Description	Type 12/3R enclosure box (code-gauge steel, gasketed, with dripshield, painted ANSI-61), 60.00 x 20.00 x 6.00 in (H x W x D); complete enclosure = box + trim LWPT2060.	A	S3, S16 May 2022 p.37 Table 56; Oct 2017 Table 44; oem_spec
Material	Code gauge steel, gasketed, dripshield	A	S3 p.37; oem_spec
Finish / plating	ANSI-61 paint	A	same as above
Dimensions	60.00 in H x 20.00 in W x 6.00 in D	A	S3 p.37 Table 56; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	knockouts		

EDH-EAT-01072	VWPB2072	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 72 x 20 x 6 in

OEM part number	VWPB2072	A	S3, S16 oem_spec
Description	Type 12/3R enclosure box (code-gauge steel, gasketed, with dripshield, painted ANSI-61), 72.00 x 20.00 x 6.00 in (H x W x D); complete enclosure = box + trim LWPT2072.	A	S3, S16 May 2022 p.37 Table 56; Oct 2017 Table 44; oem_spec
Material	Code gauge steel, gasketed, dripshield	A	S3 p.37; oem_spec
Finish / plating	ANSI-61 paint	A	same as above
Dimensions	72.00 in H x 20.00 in W x 6.00 in D	A	S3 p.37 Table 56; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	knockouts		

EDH-EAT-01074	VWPB2090	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 90 x 20 x 6 in

OEM part number	VWPB2090	A	S3, S16 oem_spec
Description	Type 12/3R enclosure box (code-gauge steel, gasketed, with dripshield, painted ANSI-61), 90.00 x 20.00 x 6.00 in (H x W x D); complete enclosure = box + trim LWPT2090.	A	S3, S16 May 2022 p.37 Table 56; Oct 2017 Table 44; oem_spec
Material	Code gauge steel, gasketed, dripshield	A	S3 p.37; oem_spec
Finish / plating	ANSI-61 paint	A	same as above
Dimensions	90.00 in H x 20.00 in W x 6.00 in D	A	S3 p.37 Table 56; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	knockouts		

EDH-EAT-01052	YS2036	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 36 in high x 5.75 in deep

OEM part number	YS2036	A	S7 oem_spec
Description	Standard ("YS") Type 1 panelboard box for Pow-R-Line 1a/2a/3a: 36.00 in high x 20.00 in (508.0 mm) wide x 5.75 in (146.1 mm) deep. Paired with LT2036S (surface) or LT2036F (flush) trim; EZ alternative EZB2036R + EZT2036S/F.	A	S7 Tables 22.1-6, 22.2-6, 22.3-11; oem_spec
Installation location	Panelboard enclosure (back box)	A	S7 Table 22.1-6; oem_spec
Dimensions	36.00 in H x 20.00 in W x 5.75 in D (box)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	gauge, knockouts, Material, Status		

EDH-EAT-01054	YS2042	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 42 in high x 5.75 in deep

OEM part number	YS2042	A	S7 oem_spec
Description	Standard ("YS") Type 1 panelboard box for Pow-R-Line 1a/2a/3a: 42.00 in high x 20.00 in (508.0 mm) wide x 5.75 in (146.1 mm) deep. Paired with LT2042S (surface) or LT2042F (flush) trim; EZ alternative EZB2042R + EZT2042S/F.	A	S7 Tables 22.1-6, 22.2-6, 22.3-11; oem_spec
Installation location	Panelboard enclosure (back box)	A	S7 Table 22.1-6; oem_spec
Dimensions	42.00 in H x 20.00 in W x 5.75 in D (box)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	gauge, knockouts, Material, Status		

EDH-EAT-01056	YS2048	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 48 in high x 5.75 in deep

OEM part number	YS2048	A	S7 oem_spec
Description	Standard ("YS") Type 1 panelboard box for Pow-R-Line 1a/2a/3a: 48.00 in high x 20.00 in (508.0 mm) wide x 5.75 in (146.1 mm) deep. Paired with LT2048S (surface) or LT2048F (flush) trim; EZ alternative EZB2048R + EZT2048S/F.	A	S7 Tables 22.1-6, 22.2-6, 22.3-11; oem_spec
Installation location	Panelboard enclosure (back box)	A	S7 Table 22.1-6; oem_spec
Dimensions	48.00 in H x 20.00 in W x 5.75 in D (box)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	gauge, knockouts, Material, Status		

EDH-EAT-01058	YS2060	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 60 in high x 5.75 in deep

OEM part number	YS2060	A	S7 oem_spec
Description	Standard ("YS") Type 1 panelboard box for Pow-R-Line 1a/2a/3a: 60.00 in high x 20.00 in (508.0 mm) wide x 5.75 in (146.1 mm) deep. Paired with LT2060S (surface) or LT2060F (flush) trim; EZ alternative EZB2060R + EZT2060S/F.	A	S7 Tables 22.1-6, 22.2-6, 22.3-11; oem_spec
Installation location	Panelboard enclosure (back box)	A	S7 Table 22.1-6; oem_spec
Dimensions	60.00 in H x 20.00 in W x 5.75 in D (box)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	gauge, knockouts, Material, Status		

EDH-EAT-01060	YS2072	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 72 in high x 5.75 in deep

OEM part number	YS2072	A	S7 oem_spec
Description	Standard ("YS") Type 1 panelboard box for Pow-R-Line 1a/2a/3a: 72.00 in high x 20.00 in (508.0 mm) wide x 5.75 in (146.1 mm) deep. Paired with LT2072S (surface) or LT2072F (flush) trim; EZ alternative EZB2072R + EZT2072S/F.	A	S7 Tables 22.1-6, 22.2-6, 22.3-11; oem_spec
Installation location	Panelboard enclosure (back box)	A	S7 Table 22.1-6; oem_spec
Dimensions	72.00 in H x 20.00 in W x 5.75 in D (box)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	gauge, knockouts, Material, Status		

EDH-EAT-01062	YS2090	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 90 in high x 5.75 in deep

OEM part number	YS2090	A	S7 oem_spec
Description	Standard ("YS") Type 1 panelboard box for Pow-R-Line 1a/2a/3a: 90.00 in high x 20.00 in (508.0 mm) wide x 5.75 in (146.1 mm) deep. Paired with LT2090S (surface) or LT2090F (flush) trim; EZ alternative EZB2090R + EZT2090S/F.	A	S7 Tables 22.1-6, 22.2-6, 22.3-11; oem_spec
Installation location	Panelboard enclosure (back box)	A	S7 Table 22.1-6; oem_spec
Dimensions	90.00 in H x 20.00 in W x 5.75 in D (box)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	gauge, knockouts, Material, Status		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01266	**1A85195H01**	Eaton EZ Trim anti-lift slide bracket	—	unknown
EDH-EAT-00413	**2C11641G02**	Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X	—	Listed in s1, s2, s4
EDH-EAT-00219	**4180B62**	PRL1a/2a/1X/2X service entrance bonding jumper kit	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-01266	1A85195H01	Eaton	hardware-kit	STATUS UNKNOWN

Eaton EZ Trim anti-lift slide bracket

OEM part number	1A85195H01	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Description	EZ Trim anti-lift slide bracket (Pow-R-Kit renewal part list, RP01414001E).	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-00413	2C11641G02	Cutler-Hammer	hardware-kit	LISTED IN S1, S2, S4

Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X

OEM part number	2C11641G02	A	S1, S2, S4 oem_spec
Description	Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X (6 per bag)	A	same as above
Status	Listed in s1, s2, s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00219	4180B62	Cutler-Hammer	hardware-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X service entrance bonding jumper kit

OEM part number	4180B62	A	S1, S2, S4 s1 p.15 Table 18; oem_spec
Alternate / superseded numbers	Mechanical main lugs/main breakers: 100-225 A G01 (tin Al) G02 (bare Cu) G03 (silver Cu) G04 (tin Cu); 400-600 A G05-G08. Crimp main lugs: 100-225 A G09-G12; 400-600 A G13-G16. Copper main lugs: 100-225 A G18-G20; 400-600 A G22-G24	A	S1 style_number; p.15 Table 18; oem_spec
Description	Service entrance bonding jumper kit, neutral-to-ground; order 4180B62 + G item by main ampere rating, lug type and connector plating	A	S1, S2 s1 p.15; oem_spec
Application	accessory (service entrance)	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.15; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*2009 edition lists 400 A row as '400'; 2021 lists '400-600' - same G numbers.*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00416	**42C1129H02**	Chassis mounting hardware, PRL1a/2a/3a	—	Listed in s4
EDH-EAT-00414	**5157C83G06**	Trim screws	—	Listed in s1, s2, s4
EDH-EAT-01256	**70010RBB8G**	Eaton PRL1a/2a/3a breaker mounting screws (10-32 x .56 hex head)	—	unknown
EDH-EAT-01267	**70010RBBB8P**	Eaton EZ Trim anti-lift slide bracket 10-32 screw	—	unknown
EDH-EAT-01257	**70030KBDBR**	Eaton PRL1a/2a/3a DF (deadfront) assembly screws (1/4-20 x .75 square rec.)	—	unknown
EDH-EAT-01258	**70032SBB8D**	Eaton PRL1a/2a/3a DF mounting screws (10-32 x .38 hex head)	—	unknown
EDH-EAT-01265	**70210AL616**	Eaton EZ box 1/4-20 hex flange mounting nut	—	unknown
EDH-EAT-00415	**7499A48G04**	Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X	—	Listed in s1, s2, s4
EDH-EAT-01254	**QLBHTSE**	Eaton QUICKLAG binding head terminal screw and clamp, terminal type 5	—	unknown
EDH-EAT-01251	**QLLDTSA**	Eaton QUICKLAG terminal screw, terminal type 1	—	unknown
EDH-EAT-01252	**QLLDTSB**	Eaton QUICKLAG terminal screw, terminal type 2	—	unknown
EDH-EAT-01253	**QLLDTSC**	Eaton QUICKLAG terminal screw, terminal type 3	—	unknown
EDH-EAT-01255	**QLLNTSFG**	Eaton QUICKLAG terminal screw, terminal types 6 and 7	—	unknown

EDH-EAT-00416 — 42C1129H02 — Cutler-Hammer — fastener — LISTED IN S4

Chassis mounting hardware, PRL1a/2a/3a

OEM part number	42C1129H02	**A**	S4 oem_spec
Description	Chassis mounting hardware, PRL1a/2a/3a (Pow-R-Kit)	**A**	same as above
Status	Listed in s4	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00414 — 5157C83G06 — Cutler-Hammer — fastener — LISTED IN S1, S2, S4

Trim screws

OEM part number	5157C83G06	**A**	S1, S2, S4 oem_spec
Description	Trim screws (and captive nuts) for PRL1a/2a/3a/1X/2X/3X and PRL4B standard trim (10 per bag)	**A**	same as above
Status	Listed in s1, s2, s4	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-01256 — 70010RBB8G — Eaton — fastener — STATUS UNKNOWN

Eaton PRL1a/2a/3a breaker mounting screws (10-32 x .56 hex head)

OEM part number	70010RBB8G	**A**	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Description	PRL1a/2a/3a breaker mounting screws (10-32 x .56 hex head) (Pow-R-Kit renewal part list, RP01414001E).	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01267	70010RBBB8P	Eaton	fastener	STATUS UNKNOWN

Eaton EZ Trim anti-lift slide bracket 10-32 screw

OEM part number	70010RBBB8P	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Description	EZ Trim anti-lift slide bracket 10-32 screw (Pow-R-Kit renewal part list, RP01414001E).	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Material, Status		
Open question	*Part 70010RBBB8P printed with "RBBB8P" (vs 70010RBB8G) - verify spelling.*		

EDH-EAT-01257	70030KBDBR	Eaton	fastener	STATUS UNKNOWN

Eaton PRL1a/2a/3a DF (deadfront) assembly screws (1/4-20 x .75 square rec.)

OEM part number	70030KBDBR	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Description	PRL1a/2a/3a DF (deadfront) assembly screws (1/4-20 x .75 square rec.) (Pow-R-Kit renewal part list, RP01414001E).	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01258	70032SBB8D	Eaton	fastener	STATUS UNKNOWN

Eaton PRL1a/2a/3a DF mounting screws (10-32 x .38 hex head)

OEM part number	70032SBB8D	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Description	PRL1a/2a/3a DF mounting screws (10-32 x .38 hex head) (Pow-R-Kit renewal part list, RP01414001E).	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01265	70210AL616	Eaton	fastener	STATUS UNKNOWN

Eaton EZ box 1/4-20 hex flange mounting nut

OEM part number	70210AL616	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Description	EZ box 1/4-20 hex flange mounting nut (Pow-R-Kit renewal part list, RP01414001E).	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-00415	7499A48G04	Cutler-Hammer	fastener	LISTED IN S1, S2, S4

Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X

OEM part number	7499A48G04	A	S1, S2, S4, S3, S16 oem_spec
Description	Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X	A	S1, S2, S4 oem_spec
	Chassis mounting hardware bag for PRL1X, PRL2X, PRL3X, PRL1a, PRL2a, PRL3a panels	A	S3, S16 May 2022 p.21 Table 28; oem_spec
Status	Listed in s1, s2, s4	A	S1, S2, S4 oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Kit contents, Material, Torque values		

EDH-EAT-01254	QLBHTSE	Eaton	fastener	STATUS UNKNOWN

Eaton QUICKLAG binding head terminal screw and clamp, terminal type 5

OEM part number	QLBHTSE	**A**	S647 p. V4-T1-46, Spare Terminal Hardware Screws (Lugs not Included); oem_spec
Description	Spare terminal hardware: QUICKLAG binding head terminal screw and clamp, terminal type 5 (lugs not included); order in multiples of 10.	**A**	same as above
Application	branch	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01251	QLLDTSA	Eaton	fastener	STATUS UNKNOWN

Eaton QUICKLAG terminal screw, terminal type 1

OEM part number	QLLDTSA	**A**	S647 p. V4-T1-46, Spare Terminal Hardware Screws (Lugs not Included); oem_spec
Description	Spare terminal hardware: QUICKLAG terminal screw, terminal type 1 (lugs not included); order in multiples of 10.	**A**	same as above
Application	branch	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01252	QLLDTSB	Eaton	fastener	STATUS UNKNOWN

Eaton QUICKLAG terminal screw, terminal type 2

OEM part number	QLLDTSB	**A**	S647 p. V4-T1-46, Spare Terminal Hardware Screws (Lugs not Included); oem_spec
Description	Spare terminal hardware: QUICKLAG terminal screw, terminal type 2 (lugs not included); order in multiples of 10.	**A**	same as above
Application	branch	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01253	QLLDTSC	Eaton	fastener	STATUS UNKNOWN

Eaton QUICKLAG terminal screw, terminal type 3

OEM part number	QLLDTSC	**A**	S647 p. V4-T1-46, Spare Terminal Hardware Screws (Lugs not Included); oem_spec
Description	Spare terminal hardware: QUICKLAG terminal screw, terminal type 3 (lugs not included); order in multiples of 10.	**A**	same as above
Application	branch	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01255	QLLNTSFG	Eaton	fastener	STATUS UNKNOWN

Eaton QUICKLAG terminal screw, terminal types 6 and 7

OEM part number	QLLNTSFG	**A**	S647 p. V4-T1-46, Spare Terminal Hardware Screws (Lugs not Included); oem_spec
Description	Spare terminal hardware: QUICKLAG terminal screw, terminal types 6 and 7 (lugs not included); order in multiples of 10.	**A**	same as above
Application	branch	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Material, Status		

Spd Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01225	**SPD050208Y2A**	Eaton integrated panelboard SPD SPD050208Y2A	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01220	**SPD050230L2A**	Eaton integrated panelboard SPD SPD050230L2A	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01226	**SPD100208Y2A**	Eaton integrated panelboard SPD SPD100208Y2A	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01224	**SPD100480Y2A**	Eaton integrated panelboard SPD SPD100480Y2A	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01221	**SPD120230L3A**	Eaton integrated panelboard SPD SPD120230L3A	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01227	**SPD120480Y2C**	Eaton integrated panelboard SPD SPD120480Y2C	Switchboard, busways and panelboards (PRL1a, 2a, 3a, 3e, 4) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01222	**SPD160480Y3A**	Eaton integrated panelboard SPD SPD160480Y3A	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01223	**SPD200480Y3A**	Eaton integrated panelboard SPD SPD200480Y3A	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01219	**SPDkkkVVVVfA**	Eaton SPD Series integrated panelboard SPD, direct bus mounted (application code A)	—	unknown

EDH-EAT-01225	SPD050208Y2A	Eaton	spd-kit	ACTIVE EATON PRODUCT P

Eaton integrated panelboard SPD SPD050208Y2A

OEM part number	SPD050208Y2A	**A**	S251 oem_spec
Alternate / superseded numbers	UPC 786685316765	**A**	S251 alias; skuPage.SPD050208Y2A (General/Product specifications); oem_spec
Description	Eaton Surge Protection Device, SPD Series, 50 kA per phase, 208Y/120V (4W+G) rating, 150 L-N, 150 L-G, 150 N-G, 300 L-L MCOV, Internal integrated, Standard feature package, used with Direct bus mounted panel boards (PRL1a, 2a, 3a, 3e)	**A**	same as above
Breaker compatibility	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) (Eaton web 'Used with' attribute)	**A**	same as above
Voltage rating	120/208 wye (4W+G); Surge current; 50 kA per phase; Short-circuit rating; 200 kA; Operating temperature; -40 to 50 °C; Mounting Method; Internal integrated	**A**	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	same as above
Listing / approvals	UL 1449; UL Listed	**A**	S251 skuPage.SPD050208Y2A (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 9.5 in, height 3.45 in, width 5.4 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Warranty	15 year	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL3E		
Not yet documented	Dimensions, mounting_hardware		

EDH-EAT-01220	SPD050230L2A	Eaton	spd-kit	ACTIVE EATON PRODUCT P

Eaton integrated panelboard SPD SPD050230L2A

OEM part number	SPD050230L2A	**A**	S251 oem_spec
Alternate / superseded numbers	UPC 786685406596	**A**	S251 alias; skuPage.SPD050230L2A (General/Product specifications); oem_spec
Description	Eaton Surge Protection Device, SPD Series, 50 kA per phase, 230V rating, Internal integrated, Standard feature package, used with Direct bus mounted panel boards (PRL1a, 2a, 3a, 3e)	**A**	same as above
Application	Integral SPD; Single-phase; Surge current; 50 kA per phase; Short-circuit rating; 200 kA; Operating temperature; -40 to 50 °C; Mounting Method; Internal integrated	**A**	same as above
Breaker compatibility	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) (Eaton web 'Used with' attribute)	**A**	same as above
Voltage rating	230 V	**A**	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	same as above
Listing / approvals	UL 1449; UL Listed	**A**	S251 skuPage.SPD050230L2A (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 9.5 in, height 3.45 in, width 5.4 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Warranty	15 year	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL3E		
Not yet documented	Dimensions, mounting_hardware		

EDH-EAT-01226	SPD100208Y2A	Eaton	spd-kit	ACTIVE EATON PRODUCT P

Eaton integrated panelboard SPD SPD100208Y2A

OEM part number	SPD100208Y2A	A	S251 oem_spec
Alternate / superseded numbers	UPC 786685317366	A	S251 alias; skuPage.SPD100208Y2A (General/Product specifications); oem_spec
Description	Eaton Surge Protection Device, SPD Series, 100 kA per phase, 208Y/120V (4W+G) rating, 150 L-N, 150 L-G, 150 N-G, 300 L-L MCOV, Internal integrated, Standard feature package, used with Direct bus mounted panel boards (PRL1a, 2a, 3a, 3e)	A	same as above
Breaker compatibility	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) (Eaton web 'Used with' attribute)	A	same as above
Voltage rating	120/208 wye (4W+G); Surge current; 100 kA per phase; Short-circuit rating; 200 kA; Operating temperature; -40 to 50 °C; Mounting Method; Internal integrated	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL 1449; UL Listed	A	S251 skuPage.SPD100208Y2A (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 9.5 in, height 3.45 in, width 5.4 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Warranty	15 year	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL3E		
Not yet documented	Dimensions, mounting_hardware		

EDH-EAT-01224	SPD100480Y2A	Eaton	spd-kit	ACTIVE EATON PRODUCT P

Eaton integrated panelboard SPD SPD100480Y2A

OEM part number	SPD100480Y2A	A	S251 oem_spec
Alternate / superseded numbers	UPC 786685317397	A	S251 alias; skuPage.SPD100480Y2A (General/Product specifications); oem_spec
Description	Eaton Surge Protection Device, SPD Series, 100 kA per phase, 480Y/277V (4W+G) rating, 320 L-N, 320 L-G, 320 N-G, 640 L-L MCOV, Internal integrated, Standard feature package, used with Direct bus mounted panel boards (PRL1a, 2a, 3a, 3e)	A	same as above
Breaker compatibility	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) (Eaton web 'Used with' attribute)	A	same as above
Voltage rating	277/480 wye (4W+G); Surge current; 100 kA per phase; Short-circuit rating; 200 kA; Operating temperature; -40 to 50 °C; Mounting Method; Internal integrated	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL 1449; UL Listed	A	S251 skuPage.SPD100480Y2A (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 9.5 in, height 3.45 in, width 5.4 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Warranty	15 year	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL3E		
Not yet documented	Dimensions, mounting_hardware		

EDH-EAT-01221	SPD120230L3A	Eaton	spd-kit	ACTIVE EATON PRODUCT P

Eaton integrated panelboard SPD SPD120230L3A

OEM part number	SPD120230L3A	A	S251 oem_spec
Alternate / superseded numbers	UPC 786685406695	A	S251 alias; skuPage.SPD120230L3A (General/Product specifications); oem_spec
Description	SPD, For direct bus mounted panel boards (PRL1a, 2a, 3a, 3E), 120 kAIC, 200V, 208V, 220V, 230,V 240V, 277V, Standard feature package and surge counter, Internal integrated mount, 352 L-N, 640 L-G, 320 N-G operating voltage	A	same as above
Breaker compatibility	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) (Eaton web 'Used with' attribute)	A	same as above
Voltage rating	200 V, 208 V, 220 V, 230, V 240 V, 277 V; Surge current; 120 kA per phase; Short-circuit rating; 200 kA; Operating temperature; -40 to 50 °C; Mounting Method; Internal integrated	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL 1449; UL Listed	A	S251 skuPage.SPD120230L3A (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 9.5 in, height 3.45 in, width 5.4 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Warranty	15 year	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL3E		
Not yet documented	Dimensions, mounting_hardware		

EDH-EAT-01227	SPD120480Y2C	Eaton	spd-kit	ACTIVE EATON PRODUCT P

Eaton integrated panelboard SPD SPD120480Y2C

OEM part number	SPD120480Y2C	A	S251 oem_spec
Alternate / superseded numbers	UPC 786685322193	A	S251 alias; skuPage.SPD120480Y2C (General/Product specifications); oem_spec
Description	Surge Protection Device, SPD series, For switchboard, busways and panel boards (PRL1a, 2a, 3a, 3E, 4), 120 kAIC, 277/480V wye (4W+G), Standard feature package, Internal integrated mount, 320 L-N, 320 L-G, 320 N-G, 640 L-L operating voltage	A	same as above
Breaker compatibility	Switchboard, busways and panelboards (PRL1a, 2a, 3a, 3e, 4) (Eaton web 'Used with' attribute)	A	same as above
Voltage rating	277/480 wye (4W+G); Surge current; 120 kA per phase; Short-circuit rating; 200 kA; Operating temperature; -40 to 50 °C; Mounting Method; Internal integrated	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL 1449; UL Listed	A	S251 skuPage.SPD120480Y2C (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 9.5 in, height 3.45 in, width 5.4 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Warranty	15 year	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL3E, PRL4, PRLC		
Not yet documented	Dimensions, mounting_hardware		

EDH-EAT-01222	SPD160480Y3A	Eaton	spd-kit		ACTIVE EATON PRODUCT P
Eaton integrated panelboard SPD SPD160480Y3A					
OEM part number	SPD160480Y3A			**A**	S251 oem_spec
Alternate / superseded numbers	UPC 786685318097			**A**	S251 alias; skuPage.SPD160480Y3A (General/Product specifications); oem_spec
Description	SPD, For direct bus mounted panel boards (PRL1a, 2a, 3a, 3E), 160 kAIC, 277/480V wye (4W+G), Standard feature package and surge counter, Internal integrated mount, 320 L-N, 320 L-G, 320 N-G, 640 L-L operating voltage			**A**	same as above
Breaker compatibility	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) (Eaton web 'Used with' attribute)			**A**	same as above
Voltage rating	277/480 wye (4W+G); Surge current; 160 kA per phase; Short-circuit rating; 200 kA; Operating temperature; -40 to 50 °C; Mounting Method; Internal integrated			**A**	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)			**A**	same as above
Listing / approvals	UL 1449; UL Listed			**A**	S251 skuPage.SPD160480Y3A (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 9.5 in, height 3.45 in, width 5.4 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)			**A**	same as above
Warranty	15 year			**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL3E				
Not yet documented	Dimensions, mounting_hardware				

EDH-EAT-01223	SPD200480Y3A	Eaton	spd-kit		ACTIVE EATON PRODUCT P
Eaton integrated panelboard SPD SPD200480Y3A					
OEM part number	SPD200480Y3A			**A**	S251 oem_spec
Alternate / superseded numbers	UPC 786685318394			**A**	S251 alias; skuPage.SPD200480Y3A (General/Product specifications); oem_spec
Description	SPD, For direct bus mounted panel boards (PRL1a, 2a, 3a, 3E), 200 kAIC, 277/480V wye (4W+G), Standard feature package and surge counter, Internal integrated mount, 320 L-N, 320 L-G, 320 N-G, 640 L-L operating voltage			**A**	same as above
Breaker compatibility	Direct bus mounted panelboards (PRL1a, 2a, 3a, 3e) (Eaton web 'Used with' attribute)			**A**	same as above
Voltage rating	277/480 wye (4W+G); Surge current; 200 kA per phase; Short-circuit rating; 200 kA; Operating temperature; -40 to 50 °C; Mounting Method; Internal integrated			**A**	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)			**A**	same as above
Listing / approvals	UL 1449; UL Listed			**A**	S251 skuPage.SPD200480Y3A (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 9.5 in, height 3.45 in, width 5.4 in, weight 7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)			**A**	same as above
Warranty	15 year			**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL3E				
Not yet documented	Dimensions, mounting_hardware				

EDH-EAT-01219	SPDkkkVVVVfA	Cutler-Hammer	spd-kit	STATUS UNKNOWN

Eaton SPD Series integrated panelboard SPD, direct bus mounted (application code A)

OEM part number	SPDkkkVVVVfA	A	S465 oem_spec
Description	SPD Series catalog number = SPD + kA per phase (050/080/100/120/160/200/250/300/400) + voltage code (240S, 208Y, 220Y, 400Y, 480Y, 600Y, 240D, 480D, 600D, 240H) + feature package (1 basic, 2 standard, 3 standard + surge counter) + application (A = panelboards PRL1a/2a/3a/3E direct bus mounted; B = switchgear; C = panelboards PRL1a-4, switchboards, busway when connected through a breaker; J = MCC). PRL1a/2a/3a/3E units limited to 50-200 kA; use C option when connected through a circuit breaker.	A	S465 V3-T2-8; oem_spec
Application	accessory (integral SPD mounted directly to panelboard bus bars)	A	S465 V3-T2-7; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL3E		
Not yet documented	bus_connector_details, mounting_hardware_part_numbers		
Open question	*Eaton web SKUs use voltage codes such as 230L (e.g. SPD050230L2A) that are not in the CA08100004E (Oct 2022) table; older/alternate code set?*		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00422	**1256C42G01**	BAB 2- and 3-pole lock-off	BAB 2- and 3-pole **A**	Listed in s4
EDH-EAT-00421	**1256C42G02**	BAB 1-pole lock-off	BAB 1-pole **A**	Listed in s4
EDH-EAT-01268	**1294C01H01**	Eaton lock dog (non-padlockable), G-frame GD/GHC/GHB/GMCP	GD, GHC, GHB, GMCP **A**	unknown
EDH-EAT-01250	**QL1HT**	Eaton QUICKLAG handle tie - single-pole	QUICKLAG **A**	unknown
EDH-EAT-01243	**QL1NPL**	Eaton Handle lock, non-padlockable, QUICKLAG Type P, B, C single-pole	non-padlockable, QUICKLAG Type P, B, C single-pole (locks ON or OFF) **A**	unknown
EDH-EAT-01244	**QL23NPL**	Eaton Handle lock, non-padlockable, QUICKLAG Type P, B, C two- and three-pole	non-padlockable, QUICKLAG Type P, B, C two- and three-pole (locks ON o **A**	unknown

EDH-EAT-00422	1256C42G01	Cutler-Hammer	handle-lock	LISTED IN S4

BAB 2- and 3-pole lock-off

OEM part number	1256C42G01	A	S4 oem_spec
Description	BAB 2- and 3-pole lock-off (non-padlockable)	A	same as above
	BAB 2- and 3-pole lock off (non-padlockable); Pow-R-Kit max order qty 5.	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Breaker compatibility	BAB 2- and 3-pole	A	same as above
Status	Listed in s4	A	S4 oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00421	1256C42G02	Cutler-Hammer	handle-lock	LISTED IN S4

BAB 1-pole lock-off

OEM part number	1256C42G02	A	S4 oem_spec
Description	BAB 1-pole lock-off (non-padlockable)	A	same as above
	BAB 1-pole lock off (non-padlockable); Pow-R-Kit max order qty 10.	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Breaker compatibility	BAB 1-pole	A	same as above
Status	Listed in s4	A	S4 oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-01268	1294C01H01	Cutler-Hammer	handle-lock	STATUS UNKNOWN

Eaton lock dog (non-padlockable), G-frame GD/GHC/GHB/GMCP

OEM part number	1294C01H01	A	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices); oem_spec
Description	Lock dog (non-padlockable) for G-frame GD/GHC/GHB/GMCP; 1 unit per package.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	GD, GHC, GHB, GMCP	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C G-Frame (GD/GHC/GHB), GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01250	QL1HT	Eaton	handle-lock	STATUS UNKNOWN

Eaton QUICKLAG handle tie - single-pole

OEM part number	QL1HT	A	S647 p. V4-T1-43 Accessories (Handle Locks) / V4-T1-45 (Handle Tie); oem_spec
Description	QUICKLAG handle tie - single-pole.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QUICKLAG	A	same as above
Kit contents	Order in multiples of 100	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01243	QL1NPL	Eaton	handle-lock	STATUS UNKNOWN

Eaton Handle lock, non-padlockable, QUICKLAG Type P, B, C single-pole

OEM part number	QL1NPL	A	S647 p. V4-T1-43 Accessories (Handle Locks) / V4-T1-45 (Handle Tie); oem_spec
Description	Handle lock, non-padlockable, QUICKLAG Type P, B, C single-pole (locks ON or OFF).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	non-padlockable, QUICKLAG Type P, B, C single-pole (locks ON or OFF)	A	same as above
Kit contents	Order in multiples of 10	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01244	QL23NPL	Eaton	handle-lock	STATUS UNKNOWN

Eaton Handle lock, non-padlockable, QUICKLAG Type P, B, C two- and three-pole

OEM part number	QL23NPL	A	S647 p. V4-T1-43 Accessories (Handle Locks) / V4-T1-45 (Handle Tie); oem_spec
Description	Handle lock, non-padlockable, QUICKLAG Type P, B, C two- and three-pole (locks ON or OFF).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	non-padlockable, QUICKLAG Type P, B, C two- and three-pole (locks ON or OFF)	A	same as above
Kit contents	Order in multiples of 10	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Material, Status		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01269	**1223C77G03**	Eaton padlockable handle device, G-frame GD/GHC/GHB (pkg 10)	GD, GHC, GHB **A**	unknown
EDH-EAT-01270	**1223C77G05**	Eaton padlockable handle device, G-frame GD/GHC/GHB (pkg 10)	GD, GHC, GHB **A**	unknown
EDH-EAT-01271	**1223C77G06**	Eaton padlockable handle device, G-frame GD/GHC/GHB (pkg 100)	GD, GHC, GHB **A**	unknown
EDH-EAT-01247	**QC123PL**	Eaton Handle lock, padlockable, QUICKLAG Type C single-, two- and three-pole	padlockable, QUICKLAG Type C single-, two- and three-pole **A**	unknown
EDH-EAT-01249	**QC123PLOFF**	Eaton Handle lock, padlockable, QUICKLAG Type C single-, two- and three-pole	padlockable, QUICKLAG Type C single-, two- and three-pole (OFF only) **A**	unknown
EDH-EAT-01246	**QL123PL**	Eaton Handle lock, padlockable, QUICKLAG Type P, B and ground fault single-, two- and three-pole	padlockable, QUICKLAG Type P, B and ground fault single-, two- and thr **A**	unknown
EDH-EAT-01248	**QL123PLOFF**	Eaton Handle lock, padlockable, QUICKLAG Type P, B single-, two- and three-pole	padlockable, QUICKLAG Type P, B single-, two- and three-pole (OFF only **A**	unknown
EDH-EAT-01245	**QL1PL**	Eaton Handle lock, padlockable, QUICKLAG Type P, B, C single-pole	padlockable, QUICKLAG Type P, B, C single-pole (locks ON or OFF) **A**	unknown

EDH-EAT-01269 — 1223C77G03 — Cutler-Hammer — padlock-attachment — STATUS UNKNOWN

Eaton padlockable handle device, G-frame GD/GHC/GHB (pkg 10)

OEM part number	1223C77G03	**A**	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices) Table 12-475; oem_spec
Description	Padlockable G-frame handle device; accepts .285 lock shank; padlockable in the OFF position only; 10 units per package.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	GD, GHC, GHB	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C G-Frame (GD/GHC/GHB), GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Material, Status		
Open question	*Table lists G03 and G05 both as 10-unit packages - difference between G03 and G05 not stated.*		

EDH-EAT-01270 — 1223C77G05 — Cutler-Hammer — padlock-attachment — STATUS UNKNOWN

Eaton padlockable handle device, G-frame GD/GHC/GHB (pkg 10)

OEM part number	1223C77G05	**A**	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices) Table 12-475; oem_spec
Description	Padlockable G-frame handle device; accepts .285 lock shank; padlockable in the OFF position only; 10 units per package.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	GD, GHC, GHB	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C G-Frame (GD/GHC/GHB), GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Material, Status		
Open question	*Table lists G03 and G05 both as 10-unit packages - difference between G03 and G05 not stated.*		

EDH-EAT-01271	1223C77G06	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle device, G-frame GD/GHC/GHB (pkg 100)

OEM part number	1223C77G06	A	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices) Table 12-475; oem_spec
Description	Padlockable G-frame handle device; accepts .285 lock shank; padlockable in the OFF position only; 100 units per package.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	GD, GHC, GHB	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C G-Frame (GD/GHC/GHB), GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Material, Status		
Open question	*Table lists G03 and G05 both as 10-unit packages - difference between G03 and G05 not stated.*		

EDH-EAT-01247	QC123PL	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Handle lock, padlockable, QUICKLAG Type C single-, two- and three-pole

OEM part number	QC123PL	A	S647 p. V4-T1-43 Accessories (Handle Locks) / V4-T1-45 (Handle Tie); oem_spec
Description	Handle lock, padlockable, QUICKLAG Type C single-, two- and three-pole.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	padlockable, QUICKLAG Type C single-, two- and three-pole	A	same as above
Kit contents	Order in multiples of 10	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01249	QC123PLOFF	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Handle lock, padlockable, QUICKLAG Type C single-, two- and three-pole

OEM part number	QC123PLOFF	A	S647 p. V4-T1-43 Accessories (Handle Locks) / V4-T1-45 (Handle Tie); oem_spec
Description	Handle lock, padlockable, QUICKLAG Type C single-, two- and three-pole (OFF only).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	padlockable, QUICKLAG Type C single-, two- and three-pole (OFF only)	A	same as above
Kit contents	Order in multiples of 10	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01246	QL123PL	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Handle lock, padlockable, QUICKLAG Type P, B and ground fault single-, two- and three-pole

OEM part number	QL123PL	A	S647 p. V4-T1-43 Accessories (Handle Locks) / V4-T1-45 (Handle Tie); oem_spec
Description	Handle lock, padlockable, QUICKLAG Type P, B and ground fault single-, two- and three-pole (locks ON or OFF).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	padlockable, QUICKLAG Type P, B and ground fault single-, two- and three-pole (locks ON or OFF)	A	same as above
Kit contents	Order in multiples of 10	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Material, Status		
Open question	*QUICKLAG Type B = BAB/QBHW (bolt-on), Type P = HQP/QPHW (plug-on), Type C = QC cable-in/cable-out.*		

EDH-EAT-01248	QL123PLOFF	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Handle lock, padlockable, QUICKLAG Type P, B single-, two- and three-pole

OEM part number	QL123PLOFF	A	S647 p. V4-T1-43 Accessories (Handle Locks) / V4-T1-45 (Handle Tie); oem_spec
Description	Handle lock, padlockable, QUICKLAG Type P, B single-, two- and three-pole (OFF only).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	padlockable, QUICKLAG Type P, B single-, two- and three-pole (OFF only)	A	same as above
Kit contents	Order in multiples of 10	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01245	QL1PL	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Handle lock, padlockable, QUICKLAG Type P, B, C single-pole

OEM part number	QL1PL	A	S647 p. V4-T1-43 Accessories (Handle Locks) / V4-T1-45 (Handle Tie); oem_spec
Description	Handle lock, padlockable, QUICKLAG Type P, B, C single-pole (locks ON or OFF).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	padlockable, QUICKLAG Type P, B, C single-pole (locks ON or OFF)	A	same as above
Kit contents	Order in multiples of 10	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Material, Status		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01260	**114B361H01**	Eaton Directory card	—	unknown
EDH-EAT-01261	**267P963H01**	Eaton Number tabs (1-42)	—	unknown
EDH-EAT-01262	**267P963H02**	Eaton Number tabs (43-84)	—	unknown
EDH-EAT-01259	**6725D41H30**	Eaton Directory card envelope	—	unknown

EDH-EAT-01260	114B361H01	Eaton	other	STATUS UNKNOWN

Eaton Directory card

OEM part number	114B361H01	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Description	Directory card (Pow-R-Kit renewal part list, RP01414001E).	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01261	267P963H01	Eaton	other	STATUS UNKNOWN

Eaton Number tabs (1-42)

OEM part number	267P963H01	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Description	Number tabs (1-42) (Pow-R-Kit renewal part list, RP01414001E).	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01262	267P963H02	Eaton	other	STATUS UNKNOWN

Eaton Number tabs (43-84)

OEM part number	267P963H02	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Description	Number tabs (43-84) (Pow-R-Kit renewal part list, RP01414001E).	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01259	6725D41H30	Eaton	other	STATUS UNKNOWN

Eaton Directory card envelope

OEM part number	6725D41H30	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Description	Directory card envelope (Pow-R-Kit renewal part list, RP01414001E).	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Material, Status		

3.22 PRL1X — Pow-R-Line Xpert 1X

FAM-EAT-006 · panelboard · aka PRL1x, Pow-R-Line 1X, Pow-R-Line Xpert · markings: Eaton

Pow-R-Line Xpert successor to PRL1a. Shares PRL1a horizontal branch assemblies (1C96608/2C11642/1C96609), lug kits (KL*), neutral/ground assemblies and deadfronts, but vertical main/sub-feed connector kits are for Power Defense frames (KB..2T/B, KB..34, KB..36). Each branch connector rated up to 140 A total by breaker rating.

Attribute	Value	Cl.	Sources
Status	Current	A	S6 oem_spec
Era of manufacture	Introduced 2020 (time line: May 2020)	A	S1 p.2; oem_spec
Voltage rating	240 Vac maximum	A	S6 p.V2-T3-11; oem_spec
Main ampacity	MLO 600 A max; main device 600 A max; sub-feed breaker 600 A	A	same as above
Branch breakers accepted	Bolt-on or plug-on QUICKLAG (BAB, QBHW, HQP, QPHW, GF/AF/EP variants) 15-100 A; mains/sub-feeds PDG2 (Power Defense 225 A frame), PDG3, GHB	A	S1, S6 s1 pp.4,16; s6 p.V2-T3-33; oem_spec
Main handle location	PRL1X/2X Power Defense frame 2 main: handle centerline to top of box D = 10.06 in (100 A max) / 11.06 in (225 A max); PD frame 3 400 A: 20.426 in (500 kcmil lugs) / 23.426 in (750 kcmil); PD frame 3 600 A: 20.488 / 23.488 in; box example EZB2090R = 90 in; NEC 6 ft 7 in (79 in) max handle height (Dimensions are estimates to be verified by installer (per leaflet))	A	S253 pp. 2-6, Figures 1-5; oem_spec

Breaker families associated: Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3), QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S249 DG014001EN Design Guide DG014001EN Pow-R-Line 1X, 2X and 3X panelboards (Effective November 2024); S253 IL014069EN Instruction Leaflet IL014069EN Pow-R-Line 1X/2X/3X Installation reference for tall interio

Also fits this family (entry printed elsewhere): KL13AMS, KL13SMS, KL11AMS, KL11SMS, KL13AMF, KL13SMF, KL11AMF, KL11SMF, KL13AMO, KL13SMO, KL11AMO, KL11SMO, KL13AVS, KL13SVS, KL11AVS, KL11SVS, KL13AVF, KL13SVF, KL11AVF, KL11SVF, KL13AVO, KL13SVO, KL11AVO, KL11SVO, KL13SCS, KL11SCS, KL13SCF, KL11SCF, KL13SCO, KL11SCO, KL23AMS, KL23SMS, KL21AMS, KL21SMS, KL23AMF, KL23SMF, KL21AMF, KL21SMF, KL23AMO, KL23SMO, KL21AMO, KL21SMO, KL23AVS, KL23SVS, KL21AVS, KL21SVS, KL23AVF, KL23SVF, KL21AVF, KL21SVF, KL23AVO, KL23SVO, KL21AVO, KL21SVO, KL23SCS, KL21SCS, KL23SCF, KL21SCF, KL23SCO, KL21SCO, KL43AMS, KL43SMS, KL41AMS, KL41SMS, KL43AMO, KL43SMO, KL41AMO, KL41SMO, KL43AVS, KL43SVS, KL41AVS, KL41SVS, KL43AVO, KL43SVO, KL41AVO, KL41SVO, KL43SCO, KL41SCO, KL63CMS, KL63SMS, KL63TMS, KL61CMS, KL61SMS, KL61TMS, KL63CMO, KL63SMO, KL63TMO, KL61CMO, KL61SMO, KL61TMO, KL63CVS, KL63SVS, KL63TVS, KL61CVS, KL61SVS, KL61TVS, KL63CVO, KL63SVO, KL63TVO, KL61CVO, KL61SVO, KL61TVO, 1C96608, 2C11642, PRLSEBLGKD, PRLSEBFD, PRLSEBGHB, 4180B62, 1C96646, 42C4050, 1C96647, 1C96648, 1C96649, 42C4051, 1C96650, 1C96651, 1C96652, 42C4052, 1C96653, 1C96654, 1C96645, 1C97022, 5158C05, 2C11296, 1C96638, 42C8072, 42C8073, 42C7982, 4180B08, 1C96619, 1C96620, 5155C62H01, 5155C81G01, 5155C81G03, 2C11641G02, 5157C83G06, 7499A48G04, EZB2024R, EZBP2024R, EZT2024S, EZT2024F, EZTV2024S, EZTV2024F, EZB2030R, EZBP2030R, EZT2030S, EZT2030F, EZTV2030S, EZTV2030F, EZB2036R, EZBP2036R, EZT2036S, EZT2036F, EZTV2036S, EZTV2036F, EZB2042R, EZBP2042R, EZT2042S, EZT2042F, EZTV2042S, EZTV2042F, EZB2048R, EZBP2048R, EZT2048S, EZT2048F, EZTV2048S, EZTV2048F, EZB2054R, EZBP2054R, EZT2054S, EZT2054F, EZTV2054S, EZTV2054F, EZB2060R, EZBP2060R, EZT2060S, EZT2060F, EZTV2060S, EZTV2060F, EZB2072R, EZBP2072R, EZT2072S, EZT2072F, EZTV2072S, EZTV2072F, EZB2090R, EZBP2090R, EZT2090S, EZT2090F, EZTV2090S, EZTV2090F, VWPB2024, LWPT2024, VWPB2036, LWPT2036, VWPB2048, LWPT2048, VWPB2060, LWPT2060, VWPB2072, LWPT2072, VWPB2090, LWPT2090, 5155C81G04, 5155C81G05, 5155C81G06, QL1NPL, QL23NPL, QL1PL, QL123PL, QC123PL, QL123PLOFF, QC123PLOFF, QL1HT, QLLDTSA, QLLDTSB, QLLDTSC, QLBHTSE, QLLNTSFG, 1294C01H01, 1223C77G03, 1223C77G05, 1223C77G06, GPHBOFF, PHB3, EFHB, EFPHB, EFPHBOFF, FJPHBOFF, LBHPOFF, EFPHL, FJPHL, LPHL, EFPHLOFF, FJPHLOFF, LPHLOFF, PLK55OFF

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00038	**KB11A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00037	**KB11A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, tin-plated aluminum connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00040	**KB11S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, silver-plated copper connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00039	**KB11S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, silver-plated copper connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00034	**KB13A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00033	**KB13A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, tin-plated aluminum connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00036	**KB13S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, silver-plated copper connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00035	**KB13S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, silver-plated copper connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00046	**KB21A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00045	**KB21A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, tin-plated aluminum connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00048	**KB21S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00047	**KB21S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00042	**KB23A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00041	**KB23A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, tin-plated aluminum connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00044	**KB23S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00043	**KB23S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00054	**KB41A14B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00053	**KB41A14T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00056	**KB41S14B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00055	**KB41S14T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00050	**KB43A34B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00049	**KB43A34T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00052	**KB43S34B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00051	**KB43S34T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00060	**KB61S16B**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, bottom fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00059	**KB61S16T**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, top fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00058	**KB63S36B**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, bottom fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00057	**KB63S36T**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, top fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00038 KB11A2B Cutler-Hammer main-breaker-kit LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB11A2B	**A**	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, bottom fed	**A**	same as above
Application	main or sub-feed breaker (vertically mounted)	**A**	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	**A**	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	**A**	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	**A**	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	**A**	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00037 KB11A2T Cutler-Hammer main-breaker-kit LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB11A2T	**A**	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, top fed	**A**	same as above
Application	main or sub-feed breaker (vertically mounted)	**A**	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	**A**	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	**A**	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	**A**	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	**A**	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00040	KB11S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB11S2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00039	KB11S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB11S2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00034	KB13A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB13A2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00033	KB13A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB13A2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00036	KB13S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB13S2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00035	KB13S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB13S2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00046	KB21A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB21A2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00045	KB21A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB21A2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00048	KB21S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB21S2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00047	KB21S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB21S2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00042	KB23A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB23A2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00041	KB23A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB23A2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00044	KB23S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB23S2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00043	KB23S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB23S2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00054	KB41A14B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB41A14B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00053	KB41A14T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB41A14T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00056	KB41S14B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB41S14B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00055	KB41S14T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, silver-plated copper connector

OEM part number	KB41S14T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00050	KB43A34B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB43A34B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00049	KB43A34T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB43A34T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00052	KB43S34B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB43S34B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00051	KB43S34T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, silver-plated copper connector

OEM part number	KB43S34T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00060	KB61S16B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB61S16B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00059	KB61S16T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, top fed, silver-plated copper connector

OEM part number	KB61S16T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00058	KB63S36B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB63S36B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00057	KB63S36T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, top fed, silver-plated copper connector

OEM part number	KB63S36T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00791	**PRLSEBBAB**	Service entrance barrier for BAB main breaker (PRL1X/2X/3X, PRL4X)	Circuit breaker frame BAB A	Listed in current design guides DG014001EN (Nov 2024) and DG
EDH-EAT-00218	**PRLSEBPD2**	Service entrance barrier kit for PDG2 main breaker	PDG2 A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00217	**PRLSEBPD3**	Service entrance barrier kit for PDF3/PDG3 main breaker	PDF3/PDG3 A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00790	**PRLSEBPD4**	Service entrance barrier for PD4 main breaker (PRL1X/2X/3X, PRL4X)	Circuit breaker frame PD4 A	Listed in current design guides DG014001EN (Nov 2024) and DG
EDH-EAT-00789	**PRLSEBPD5**	Service entrance barrier for PD5 main breaker (PRL1X/2X/3X, PRL4X)	Circuit breaker frame PD5 A	Listed in current design guides DG014001EN (Nov 2024) and DG

EDH-EAT-00791	PRLSEBBAB	Eaton lineage	barrier	LISTED IN CURRENT DESI

Service entrance barrier for BAB main breaker (PRL1X/2X/3X, PRL4X)

OEM part number	PRLSEBBAB	A	S249, S250 DG014001EN p.4 / DG014003EN p.4, Table 22.1-1; oem_spec
Description	Service entrance barrier for BAB (Table 22.1-1 'Service Entrance Main Breaker Kits')	A	S249, S250 p. 4, Table 22.1-1; oem_spec
Application	main (service entrance)	A	S249, S250 p. 4; oem_spec
Breaker compatibility	Circuit breaker frame BAB	A	S249, S250 p. 4, Table 22.1-1; oem_spec
Status	Listed in current design guides DG014001EN (Nov 2024) and DG014003EN (Mar 2025)	A	S249, S250 p. 4; oem_spec
Cross-links	Families: PRL1X, PRL2X, PRL3X, PRL4X		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-EAT-00218	PRLSEBPD2	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for PDG2 main breaker

OEM part number	PRLSEBPD2	**A**	S1, S3, S249, S250 s1 p.25 Table 35; oem_spec
Alternate / superseded numbers	UPC 786689242091	**A**	S251 alias; skuPage.PRLSEBPD2 (General/Product specifications); oem_spec
Description	Service entrance barrier for PDG2 main breaker (service entrance main breaker kit)	**A**	S1 s1 p.25 Table 35; oem_spec
	Service entrance barrier for PD2 (Table 22.1-1 'Service Entrance Main Breaker Kits')	**A**	S249, S250 p. 4, Table 22.1-1; oem_spec
	Eaton Power Defense molded case circuit breaker accessory terminal cover, Terminal cover, PD2 Global, Power Defense, Power Defense (Eaton web product description)	**A**	S251 skuPage.PRLSEBPD2 (General/Product specifications); oem_spec
Application	main (service entrance)	**A**	S1, S249, S250 oem_spec
Breaker compatibility	PDG2	**A**	S1 s1 p.25 Table 35; oem_spec
	Circuit breaker frame PD2	**A**	S249, S250 p. 4, Table 22.1-1; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 s1 p.25 Table 35; oem_spec
	Listed in current design guides DG014001EN (Nov 2024) and DG014003EN (Mar 2025)	**A**	S249, S250 p. 4; oem_spec
Identification features	Eaton web classifies PRLSEBPD2/PRLSEBPD3 as a Power Defense molded case circuit breaker accessory 'terminal cover' (series PD2/PD3 Global) (i.e. the service-entrance barrier is supplied as a PD-frame terminal-cover style accessory)	**A**	S251 skuPage.PRLSEBPD2 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 305 mm, height 157 mm, width 109 mm, weight 1360 g (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	S251 skuPage.PRLSEBPD2 (General/Product specifications); oem_spec
Cross-links	Families: PRL1X, PRL2X, PRL3X, PRL4X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00217	PRLSEBPD3	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for PDF3/PDG3 main breaker

OEM part number	PRLSEBPD3	**A**	S1, S3, S249, S250 s1 p.25 Table 35; oem_spec
Alternate / superseded numbers	UPC 786689242107	**A**	S251 alias; skuPage.PRLSEBPD3 (General/Product specifications); oem_spec
Description	Service entrance barrier for PDF3/PDG3 main breaker (service entrance main breaker kit)	**A**	S1 s1 p.25 Table 35; oem_spec
	Service entrance barrier for PD3 (Table 22.1-1 'Service Entrance Main Breaker Kits')	**A**	S249, S250 p. 4, Table 22.1-1; oem_spec
	Eaton Power Defense molded case circuit breaker accessory terminal cover, Terminal cover, PD3 Global, Power Defense, Power Defense (Eaton web product description)	**A**	S251 skuPage.PRLSEBPD3 (General/Product specifications); oem_spec
Application	main (service entrance)	**A**	S1, S249, S250 oem_spec
Breaker compatibility	PDF3/PDG3	**A**	S1 s1 p.25 Table 35; oem_spec
	Circuit breaker frame PD3	**A**	S249, S250 p. 4, Table 22.1-1; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 s1 p.25 Table 35; oem_spec
	Listed in current design guides DG014001EN (Nov 2024) and DG014003EN (Mar 2025)	**A**	S249, S250 p. 4; oem_spec
Identification features	Eaton web classifies PRLSEBPD2/PRLSEBPD3 as a Power Defense molded case circuit breaker accessory 'terminal cover' (series PD2/PD3 Global) (i.e. the service-entrance barrier is supplied as a PD-frame terminal-cover style accessory)	**A**	S251 skuPage.PRLSEBPD3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 305 mm, height 157 mm, width 109 mm, weight 1814 g (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	S251 skuPage.PRLSEBPD3 (General/Product specifications); oem_spec
Cross-links	Families: PRL1X, PRL2X, PRL3X, PRL4X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00790	PRLSEBPD4	Eaton lineage	barrier	LISTED IN CURRENT DESI

Service entrance barrier for PD4 main breaker (PRL1X/2X/3X, PRL4X)

OEM part number	PRLSEBPD4	**A**	S249, S250, S251 DG014001EN p.4 / DG014003EN p.4, Table 22.1-1; oem_spec
Alternate / superseded numbers	UPC 786689242114	**A**	S251 alias; skuPage.PRLSEBPD4 (General/Product specifications); oem_spec
Description	Service entrance barrier for PD4 (Table 22.1-1 'Service Entrance Main Breaker Kits')	**A**	S249, S250 p. 4, Table 22.1-1; oem_spec
	Eaton Power Defense molded case circuit breaker accessory terminal cover, Terminal cover, PD4 Global, Power Defense, Frame J-K, Power Defense	**A**	S251 skuPage.PRLSEBPD4 (General/Product specifications); oem_spec
Application	main (service entrance)	**A**	S249, S250 p. 4; oem_spec
Breaker compatibility	Circuit breaker frame PD4	**A**	S249, S250 p. 4, Table 22.1-1; oem_spec
Breaker frame	Frame J-K	**A**	S251 skuPage.PRLSEBPD4 (General/Product specifications); oem_spec
Status	Listed in current design guides DG014001EN (Nov 2024) and DG014003EN (Mar 2025)	**A**	S249, S250 p. 4; oem_spec
	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.PRLSEBPD4 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.PRLSEBPD4 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 305 mm, height 157 mm, width 109 mm, weight 1814 g (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL1X, PRL2X, PRL3X, PRL4X		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-EAT-00789	PRLSEBPD5	Eaton lineage	barrier	LISTED IN CURRENT DESI
Service entrance barrier for PD5 main breaker (PRL1X/2X/3X, PRL4X)				
OEM part number	PRLSEBPD5	**A**	S249, S250, S251 DG014001EN p.4 / DG014003EN p.4, Table 22.1-1; oem_spec	
Alternate / superseded numbers	UPC 786689242121	**A**	S251 alias; skuPage.PRLSEBPD5 (General/Product specifications); oem_spec	
Description	Service entrance barrier for PD5 (Table 22.1-1 'Service Entrance Main Breaker Kits')	**A**	S249, S250 p. 4, Table 22.1-1; oem_spec	
	Eaton Power Defense molded case circuit breaker accessory terminal cover, Terminal cover, PD5 Global, Power Defense, Frame J-K, Power Defense	**A**	S251 skuPage.PRLSEBPD5 (General/Product specifications); oem_spec	
Application	main (service entrance)	**A**	S249, S250 p. 4; oem_spec	
Breaker compatibility	Circuit breaker frame PD5	**A**	S249, S250 p. 4, Table 22.1-1; oem_spec	
Breaker frame	Frame J-K	**A**	S251 skuPage.PRLSEBPD5 (General/Product specifications); oem_spec	
Status	Listed in current design guides DG014001EN (Nov 2024) and DG014003EN (Mar 2025)	**A**	S249, S250 p. 4; oem_spec	
	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.PRLSEBPD5 (General/Product specifications); oem_spec	
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.PRLSEBPD5 (General/Product specifications); oem_spec	
Package data (not part dims)	Eaton logistics attributes: length/depth 305 mm, height 157 mm, width 109 mm, weight 1814 g (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above	
Cross-links	Families: PRL1X, PRL2X, PRL3X, PRL4X			
Not yet documented	Dimensions, OEM instruction document, Material			

3.23 PRL2A — Pow-R-Line 2a

FAM-EAT-002 · panelboard · aka PRL-2A, PRL2a, Pow-R-Line 2a · markings: Cutler-Hammer, Eaton

480Y/277 Vac lighting panelboard sharing the PRL1a chassis architecture (20 in box, gutter neutral, KB vertical kits, KL lug kits, 1C96638 deadfront). Branch breakers are GHB-family bolt-ons on 1C96609 horizontal connector assemblies. GHB main breaker is horizontally mounted; all other mains vertical. Fully rated 14 kA at 480Y/277, series rated 22-150 kA.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts listed April 2021; superseded by PRL2X	**A**	S1 p.2; oem_spec
Era of manufacture	Introduced October 1996	**A**	S1, S2 p.2 Table 1; oem_spec
Successor	PRL2X	**A**	S1, S6 oem_spec
Voltage rating	240 Vac or 480Y/277 Vac maximum; 250 Vdc. Not for 480 V delta (use PRL3a); 3-phase 3-wire only when derived from 480Y/277 4-wire service	**A**	S7 p.22.2-1; oem_spec
Main ampacity	Main lugs 100, 225, 400 A (selection guide shows 600 A MLO/main at 240/480Y; 400 A dc); main breakers 100-600 A (Text on p.22.2-1 says MLO ampere ratings 100, 225 and 400 but 'Main Lugs 100-600 A' in ratings box)	**A**	S7 p.22.0-5, 22.2-1; oem_spec
Branch breakers accepted	Bolt-on GHB (480Y/277 only), GHQ, HGHB, GHQRSP, GHBGFEP 15-100 A; mains GHB (horizontal), EHD, FDB, FD, HFD, FDC, ED, EDH, EDC, JD/HJD/JDC, DK/KD/HKD/KDC, LHH, LG-family	**A**	S7 p.22.2-1 Tables 22.2-1, 22.2-2; oem_spec
Box width	20.00 in (508.0 mm)	**A**	S1 p.2; oem_spec

Breaker families associated: GHB family (480Y/277 bolt-on), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

Also fits this family (entry printed elsewhere): KB13AFT, KB13AFB, KB13SFT, KB13SFB, KB11AFT, KB11AFB, KB11SFT, KB11SFB, KB23AFT, KB23AFB, KB23SFT, KB23SFB, KB21AFT, KB21AFB, KB21SFT, KB21SFB, KB43AJT, KB43AJB, KB43SJT, KB43SJB, KB41AJT, KB41AJB, KB41SJT, KB41SJB, KB43AKT, KB43AKB, KB43SKT, KB43SKB, KB41AKT, KB41AKB, KB41SKT, KB41SKB, KL13AMS, KL13SMS, KL11AMS, KL11SMS, KL13AMF, KL13SMF, KL11AMF, KL11SMF, KL13AMO, KL13SMO, KL11AMO, KL11SMO, KL13AVS, KL13SVS, KL11AVS, KL11SVS, KL13AVF, KL13SVF, KL11AVF, KL11SVF, KL13AVO, KL13SVO, KL11AVO, KL11SVO, KL13SCS, KL11SCS, KL13SCF, KL11SCF, KL13SCO, KL11SCO, KL23AMS, KL23SMS, KL21AMS, KL21SMS, KL23AMF, KL23SMF, KL21AMF, KL21SMF, KL23AMO, KL23SMO, KL21AMO, KL21SMO, KL23AVS, KL23SVS, KL21AVS, KL21SVS, KL23AVF, KL23SVF, KL21AVF, KL21SVF, KL23AVO, KL23SVO, KL21AVO, KL21SVO, KL23SCS, KL21SCS, KL23SCF, KL21SCF, KL23SCO, KL21SCO, KL43AMS, KL43SMS, KL41AMS, KL41SMS, KL43AMO, KL43SMO, KL41AMO, KL41SMO, KL43AVS, KL43SVS, KL41AVS, KL41SVS, KL43AVO, KL43SVO, KL41AVO, KL41SVO, KL43SCO, KL41SCO, KL63CMS, KL63SMS, KL63TMS, KL61CMS, KL61SMS, KL61TMS, KL63CMO, KL63SMO, KL63TMO, KL61CMO, KL61SMO, KL61TMO, KL63CVS, KL63SVS, KL63TVS, KL61CVS, KL61SVS, KL61TVS, KL63CVO, KL63SVO, KL63TVO, KL61CVO, KL61SVO, KL61TVO, PRLSEBLGKD, PRLSEBJD, PRLSEBFD, PRLSEBGHB, 4180B62, 1C96646, 42C4050, 1C96647, 1C96648, 1C96649, 42C4051, 1C96650, 1C96651, 1C96652, 42C4052, 1C96653, 1C96654, 1C96645, 1C97022, 5158C05, 2C11296, 1C96638, 42C8072, 42C8073, 42C7982, 4180B03, 4180B61, 4180B05, 4180B04, 4180B08, 1C96619, 1C96620, 4180B52H01, 5155C62H01, 5155C81G01, K80522, K80133, K80429, 5155C81G03, 1A85194G01, 2C11641G02, 5157C83G06, 7499A48G04, 42C1129H02, 1256C42G02, 1256C42G01, EZB2024R, EZBP2024R, EZT2024S, EZT2024F, EZTV2024S, EZTV2024F, EZB2030R, EZBP2030R, EZT2030S, EZT2030F, EZTV2030S, EZTV2030F, EZB2036R, EZBP2036R, EZT2036S, EZT2036F, EZTV2036S, EZTV2036F, EZB2042R, EZBP2042R, EZT2042S, EZT2042F, EZTV2042S, EZTV2042F, EZB2048R, EZBP2048R, EZT2048S, EZT2048F, EZTV2048S, EZTV2048F, EZB2054R, EZBP2054R, EZT2054S, EZT2054F, EZTV2054S, EZTV2054F, EZB2060R, EZBP2060R, EZT2060S, EZT2060F, EZTV2060S, EZTV2060F, EZB2072R, EZBP2072R, EZT2072S, EZT2072F, EZTV2072S, EZTV2072F, EZB2090R, EZBP2090R, EZT2090S, EZT2090F, EZTV2090S, EZTV2090F, YS2036, LT2036S, YS2042, LT2042S, YS2048, LT2048S, YS2060, LT2060S, YS2072, LT2072S, YS2090, LT2090S, VWPB2024, LWPT2024, VWPB2036, LWPT2036, VWPB2048, LWPT2048, VWPB2060, LWPT2060, VWPB2072, LWPT2072, VWPB2090, LWPT2090, 5155C81G04, 5155C81G05, 5155C81G06, SPDkkkVVVVfA, SPD050230L2A, SPD120230L3A, SPD160480Y3A, SPD200480Y3A, SPD100480Y2A, SPD050208Y2A, SPD100208Y2A, SPD120480Y2C, QL1NPL, QL23NPL, QL1PL, QL123PL, QC123PL, QL123PLOFF, QC123PLOFF, QL1HT, QLLDTSA, QLLDTSB, QLLDTSC, QLBHTSE, QLLNTSFG, 70010RBB8G, 70030KBDBR, 70032SBB8D, 6725D41H30, 114B361H01, 267P963H01, 267P963H02, 70210AL616, 1A85195H01, 70010RBBB8P, 1294C01H01, 1223C77G03, 1223C77G05, 1223C77G06, GPHBOFF, PHB3, EFHB, EFPHB, EFPHBOFF, FJPHBOFF, LBHPOFF, EFPHL, FJPHL, LPHL, EFPHLOFF, FJPHLOFF, LPHLOFF, PLK55OFF

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00165	**1C96609**	PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)	GB, GHB, GHQ, GHBS A	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00165 **1C96609** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)

OEM part number	1C96609	A	S1, S2 s1 p.10 Table 10; oem_spec
Alternate / superseded numbers	1C96609G01..G63 (same G scheme as 1C96608)	A	S1 style_number; p.10; oem_spec
Description	GB/GHB/GHQ/GHBS breaker connector assembly; 12/18/30/42/48/54/72/96 circuits = G01/G09/G17/G25/G33/G41/G49/G57 (3-ph tin Al); +2 = 3-ph silver Cu; +4 = 1-ph tin Al; +6 = 1-ph silver Cu	A	S1, S2 p.10; oem_spec
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.10; oem_spec
Cross-links	Families: PRL2A, PRL2X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*s1 (2021) places table under 'PRL1X, PRL1a horizontally mounted' heading while s2 (2009) titles it 'PRL2a Horizontally Mounted' - confirm PRL2a/2X use.*		

3.24 PRL2X — Pow-R-Line Xpert 2X

FAM-EAT-007 · panelboard · aka PRL2x, Pow-R-Line 2X · markings: Eaton

Pow-R-Line Xpert successor to PRL2a; parts tables shared with PRL1X/PRL1a/PRL2a in RP01400001E.

Attribute	Value	Cl.	Sources
Status	Current	A	S6 oem_spec
Era of manufacture	Introduced 2020	A	S1 p.2; oem_spec
Voltage rating	240 or 480Y/277 Vac; 125/250 Vdc	A	S6 p.V2-T3-2; oem_spec
Main ampacity	MLO 600 A; main breaker 600 A	A	S6 p.V2-T3-11; oem_spec
Branch breakers accepted	Bolt-on GHB-family 15-100 A; mains PDG2/PDG3/GHB	A	S1, S6 oem_spec
Main handle location	As PRL1X: PD2 main D = 10.06 in (100 A) / 11.06 in (225 A); PD3 400 A D = 20.426 / 23.426 in; PD3 600 A D = 20.488 / 23.488 in (Dimensions are estimates to be verified by installer (per leaflet))	A	S253 pp. 2-6, Figures 1-5; oem_spec

Breaker families associated: GHB family (480Y/277 bolt-on), Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S249 DG014001EN Design Guide DG014001EN Pow-R-Line 1X, 2X and 3X panelboards (Effective November 2024); S253 IL014069EN Instruction Leaflet IL014069EN Pow-R-Line 1X/2X/3X Installation reference for tall interio

Also fits this family (entry printed elsewhere): KB13A2T, KB13A2B, KB13S2T, KB13S2B, KB11A2T, KB11A2B, KB11S2T, KB11S2B, KB23A2T, KB23A2B, KB23S2T, KB23S2B, KB21A2T, KB21A2B, KB21S2T, KB21S2B, KB43A34T, KB43A34B, KB43S34T, KB43S34B, KB41A14T, KB41A14B, KB41S14T, KB41S14B, KB63S36T, KB63S36B, KB61S16T, KB61S16B, KL13AMS, KL13SMS, KL11AMS, KL11SMS, KL13AMF, KL13SMF, KL11AMF, KL11SMF, KL13AMO, KL13SMO, KL11AMO, KL11SMO, KL13AVS, KL13SVS, KL11AVS, KL11SVS, KL13AVF, KL13SVF, KL11AVF, KL11SVF, KL13AVO, KL13SVO, KL11AVO, KL11SVO, KL13SCS, KL11SCS, KL13SCF, KL11SCF, KL13SCO, KL11SCO, KL23AMS, KL23SMS, KL21AMS, KL21SMS, KL23AMF, KL23SMF, KL21AMF, KL21SMF, KL23AMO, KL23SMO, KL21AMO, KL21SMO, KL23AVS, KL23SVS, KL21AVS, KL21SVS, KL23AVF, KL23SVF, KL21AVF, KL21SVF, KL23AVO, KL23SVO, KL21AVO, KL21SVO, KL23SCS, KL21SCS, KL23SCF, KL21SCF, KL23SCO, KL21SCO, KL43AMS, KL43SMS, KL41AMS, KL41SMS, KL43AMO, KL43SMO, KL41AMO, KL41SMO, KL43AVS, KL43SVS, KL41AVS, KL41SVS, KL43AVO, KL43SVO, KL41AVO, KL41SVO, KL43SCO, KL41SCO, KL63CMS, KL63SMS, KL63TMS, KL61CMS, KL61SMS, KL61TMS, KL63CMO, KL63SMO, KL63TMO, KL61CMO, KL61SMO, KL61TMO, KL63CVS, KL63SVS, KL63TVS, KL61CVS, KL61SVS, KL61TVS, KL63CVO, KL63SVO, KL63TVO, KL61CVO, KL61SVO, KL61TVO, 1C96609, PRLSEBLGKD, PRLSEBFD, PRLSEBGHB, PRLSEBPD3, PRLSEBPD2, 4180B62, 1C96646, 42C4050, 1C96647, 1C96648, 1C96649, 42C4051, 1C96650, 1C96651, 1C96652, 42C4052, 1C96653, 1C96654, 1C96645, 1C97022, 5158C05, 2C11296, 1C96638, 42C8072, 42C8073, 42C7982, 4180B08, 1C96619, 1C96620, 5155C62H01, 5155C81G01, 5155C81G03, 2C11641G02, 5157C83G06, 7499A48G04, PRLSEBPD5, PRLSEBPD4, PRLSEBBAB, EZB2024R, EZBP2024R, EZT2024S, EZT2024F, EZTV2024S, EZTV2024F, EZB2030R, EZBP2030R, EZT2030S, EZT2030F, EZTV2030S, EZTV2030F, EZB2036R, EZBP2036R, EZT2036S, EZT2036F, EZTV2036S, EZTV2036F, EZB2042R, EZBP2042R, EZT2042S, EZT2042F, EZTV2042S, EZTV2042F, EZB2048R, EZBP2048R, EZT2048S, EZT2048F, EZTV2048S, EZTV2048F, EZB2054R, EZBP2054R, EZT2054S, EZT2054F, EZTV2054S, EZTV2054F, EZB2060R, EZBP2060R, EZT2060S, EZT2060F, EZTV2060S, EZTV2060F, EZB2072R, EZBP2072R, EZT2072S, EZT2072F, EZTV2072S, EZTV2072F, EZB2090R, EZBP2090R, EZT2090S, EZT2090F, EZTV2090S, EZTV2090F, VWPB2024, LWPT2024, VWPB2036, LWPT2036, VWPB2048, LWPT2048, VWPB2060, LWPT2060, VWPB2072, LWPT2072, VWPB2090, LWPT2090, 5155C81G04, 5155C81G05, 5155C81G06, QL1NPL, QL23NPL, QL1PL, QL123PL, QC123PL, QL123PLOFF, QC123PLOFF, QL1HT, QLLDTSA, QLLDTSB, QLLDTSC, QLBHTSE, QLLNTSFG, 1294C01H01, 1223C77G03, 1223C77G05, 1223C77G06, GPHBOFF, PHB3, EFHB, EFPHB, EFPHBOFF, FJPHBOFF, LBHPOFF, EFPHL, FJPHL, LPHL, EFPHLOFF, FJPHLOFF, LPHLOFF, PLK55OFF

3.25 PRL3 — Westinghouse Pow-R-Line 3 (vintage)

FAM-EAT-012 · panelboard · aka PRL3, PRL3-LX, Pow-R-Line 3 · markings: Westinghouse

Westinghouse distribution panelboard, 20 in box, main-gutter neutral, trims LTT20xxS/F. Eaton notes the PRL3 connector kits also fit Westinghouse panelboards WEB, WCA, WEHB, WFB and HWFB.

Vintage Westinghouse power panelboard with lighting subchassis and vertical-bus branch area, 20 in wide. KPRL3FD/KPRL3ED/KPRL3CA connector kits; the PRL3 kits also fit WEB, WCA, WEHB, WFB and HWFB panelboards.

Attribute	Value	Cl.	Sources
Status	Obsolete; limited renewal parts	A	S5 oem_spec
	discontinued; replaced by PRL3a	A	S13 p. V12-T4-8; oem_spec
Era of manufacture	Pre-1994 Westinghouse	C	S1, S5 inference
Successor	PRL3a	C	S5 inference
Voltage rating	240/480/600 V class (F-frame kits rated 240/480/600 V; ED kit 240 V max)	A	S5 p.7; oem_spec
Main ampacity	600 A maximum (400 A max bus rating for subchassis)	A	S13 p. V12-T4-16; oem_spec
Branch breakers accepted	EHD/FDB/FD/HFD/FDC twin-mounted (KPRL3FD), ED/EDH/EDC (KPRL3ED), CA/CAH/HCA (KPRL3CA); BAB space on subchassis	A	S5 p.7; oem_spec
	BAB/QBH subchassis, GB/GHB, EHD, FDB, FD, HFD, FDC, ED, CA/CAH/HCA; mains up to JD, KD, LC/LA, LCL, LA-P	A	S13 pp. V12-T4-8, V12-T4-16; oem_spec
Cross fit	PRL3 connector kits fit WEB, WCA, WEHB, WFB, HWFB panelboards	A	S5 p.7 note; oem_spec

Breaker families associated: BAB, CA, CA/CAH/HCA 225 A frame, ED, EHD, FD, GB, Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC)
Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S5 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD
Also fits this family (entry printed elsewhere): 5158C05, 5155C81G01, K80522, 8450C62H39, 114C247G01, 3457B16G01, 7494A11G02, 5158C05G02, 5158C05G01, 0080429, 414A380G01, 8712C73H01

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00212	**KPRL3CA**	Vintage Westinghouse PRL3 replacement breaker connector kit (CA, CAH, HCA)	CA, CAH, HCA; one 2- or 3-pole breaker. PRL3 connector kits also fit W A	Listed in RP01400002E (Feb 2013)
EDH-EAT-00211	**KPRL3ED**	Vintage Westinghouse PRL3 replacement breaker connector kit (ED, EDH, EDC)	ED, EDH, EDC (240 V max); one 3-pole breaker. PRL3 connector kits also A	Listed in RP01400002E (Feb 2013)
EDH-EAT-00210	**KPRL3FD**	Vintage Westinghouse PRL3 replacement breaker connector kit (EHD, FDB, FD, HFD, FDC)	EHD, FDB, FD, HFD, FDC (240/480/600 V); twin-mount two 3-pole breakers A	Listed in RP01400002E (Feb 2013)

EDH-EAT-00212	KPRL3CA	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL3 replacement breaker connector kit (CA, CAH, HCA)

OEM part number	KPRL3CA	A	S5, S14 p.7 Tables 9-11; oem_spec
Description	Replacement connectors for CA, CAH, HCA; one 2- or 3-pole breaker	A	S5 p.7; oem_spec
	A, B and C phase connectors, hardware, cover and instructions to mount one two- or three-pole CA-frame breaker	A	S14 p. 7; oem_spec
Application	branch	A	same as above
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S14 p. 7 note; oem_spec
Breaker compatibility	CA, CAH, HCA; one 2- or 3-pole breaker. PRL3 connector kits also fit Westinghouse WEB, WCA, WEHB, WFB and HWFB panelboards.	A	S5 p.7; oem_spec
	CA, CAH, HCA	A	S14 p. 7; oem_spec
Kit contents	A, B, C phase connectors, hardware, cover, instructions	A	S5 p.7; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL3, WEB · Breakers: CA/CAH/HCA 225 A frame, CA		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00211	KPRL3ED	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL3 replacement breaker connector kit (ED, EDH, EDC)

OEM part number	KPRL3ED	A	S5, S14 p.7 Tables 9-11; oem_spec
Description	Replacement connectors for ED, EDH, EDC (240 V max); one 3-pole breaker	A	S5 p.7; oem_spec
	A, B and C phase connectors, hardware, cover and instructions to mount one three-pole breaker (single-mount only)	A	S14 p. 7; oem_spec
Application	branch	A	same as above
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S14 p. 7 note; oem_spec
Breaker compatibility	ED, EDH, EDC (240 V max); one 3-pole breaker. PRL3 connector kits also fit Westinghouse WEB, WCA, WEHB, WFB and HWFB panelboards.	A	S5 p.7; oem_spec
	ED, EDH, EDC (240 V max)	A	S14 p. 7; oem_spec
Kit contents	A, B, C phase connectors, hardware, cover, instructions	A	S5 p.7; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL3, WEB · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00210	KPRL3FD	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL3 replacement breaker connector kit (EHD, FDB, FD, HFD, FDC)

OEM part number	KPRL3FD	A	S5, S14 p.7 Tables 9-11; oem_spec
Description	Replacement connectors for EHD, FDB, FD, HFD, FDC (240/480/600 V); twin-mount two 3-pole breakers, max 150 A per breaker, max 200 A per connector (50-150 A)	A	S5 p.7; oem_spec
	A, B and C phase connectors, hardware and instructions to twin-mount two three-pole breakers; max 150 A per breaker and 200 A per connector (50-150 A)	A	S14 p. 7; oem_spec
Application	branch	A	same as above
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S14 p. 7 note; oem_spec
Breaker compatibility	EHD, FDB, FD, HFD, FDC (240/480/600 V); twin-mount two 3-pole breakers, max 150 A per breaker, max 200 A per connector (50-150 A). PRL3 connector kits also fit Westinghouse WEB, WCA, WEHB, WFB and HWFB panelboards.	A	S5 p.7; oem_spec
	EHD, FDB, FD, HFD, FDC (240/480/600 V)	A	S14 p. 7; oem_spec
Kit contents	A, B, C phase connectors, hardware, instructions	A	S5 p.7; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL3, WEB · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), EHD, FD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.26 PRL3A — Pow-R-Line 3a

FAM-EAT-003 · panelboard · aka PRL-3A, PRL3a, Pow-R-Line 3a · markings: Cutler-Hammer, Eaton

Power distribution panelboard on a 20 in wide box with the neutral in the main (top/bottom) gutter. Chassis height measured in X units (1X = 1.38 in); deadfront is a rail-and-end-cover frame (6559C59) with individual device covers. Branch devices are horizontally mounted on bus-stab connector kits that ship with their own device deadfront cover. Max 200 A on any one connector.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts listed April 2021; superseded by PRL3X. Deadfront/filler hardware changed for panels built after April 2019 (distributor wording)	B	S1, S8, S9 oem_spec
Era of manufacture	Introduced March 1994	A	S1, S2 p.2 Table 1; oem_spec
Successor	PRL3X	A	S1, S6 oem_spec
Voltage rating	240, 480 or 600 Vac maximum; 250 Vdc	A	S7 p.22.0-5; 22.3-1; oem_spec
Main ampacity	Main lugs 100, 250, 400, 600, 800 A; main breakers 100-600 A	A	S7 p.22.3-1; oem_spec
Branch breakers accepted	Branch 15-225 A bolt-on: BAB/QBHW family and GHB family (on KPRL3ABA/KPRL3AGB 6-24 circuit kits), EHD/FDB/FD/HFD/FDC twin-mounted to 150 A (KPRL3AFD*), FD/HFD/FDC/ED/EDH/EDC single-mounted 175-225 A (KPRL3AED*), CA/CAH/HCA; vertical mains/sub-feeds J, K, L, FB-P, LA-P, FCL, LCL, PT363/PT364 bolt switches	A	S1, S7 s1 pp.22-29; s7 p.22.3-2; oem_spec
X unit	1X = 1.38 in (35.1 mm); 1X blank cover fills 1 3/8 in, 13 in wide	A	S4 p.7 Table 12; oem_spec
Identification features	Neutral located in main gutter (end), not side gutter (Figure 1)	A	S1 p.2 Figure 1; oem_spec

Breaker families associated: CA/CAH/HCA 225 A frame, Current-limiting FCL / LCL (and FDB+LFB), GHB family (480Y/277 bolt-on), QUICKLAG bolt-on (BAB/QBHW family), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, TRI-PAC integrally fused (FB-P, LA-P, NB-P)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S4 RP01414001E Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/; S8 Rexel USA listing: Filler Plate, Panelboard, PRL3A, for Panelboards Built After April 2019; S9 Rexel USA listing: Panel Board, PRL3A, Cover Filler Plate, 1P for F-Frame Breakers (4178B0

Also fits this family (entry printed elsewhere): PRLSEBLGKD, PRLSEBJD, PRLSEBFD, PRLSEBGHB, 5158C05, 2C11296, 5155C62H01, 5155C81G01, K80522, K80133, K80429, 5155C81G03, 1A85194G01, 2C11641G02, 5157C83G06, 7499A48G04, 42C1129H02, 1256C42G02, 1256C42G01, EZB2024R, EZBP2024R, EZT2024S, EZT2024F, EZTV2024S, EZTV2024F, EZB2030R, EZBP2030R, EZT2030S, EZT2030F, EZTV2030S, EZTV2030F, EZB2036R, EZBP2036R, EZT2036S, EZT2036F, EZTV2036S, EZTV2036F, EZB2042R, EZBP2042R, EZT2042S, EZT2042F, EZTV2042S, EZTV2042F, EZB2048R, EZBP2048R, EZT2048S, EZT2048F, EZTV2048S, EZTV2048F, EZB2054R, EZBP2054R, EZT2054S, EZT2054F, EZTV2054S, EZTV2054F, EZB2060R, EZBP2060R, EZT2060S, EZT2060F, EZTV2060S, EZTV2060F, EZB2072R, EZBP2072R, EZT2072S, EZT2072F, EZTV2072S, EZTV2072F, EZB2090R, EZBP2090R, EZT2090S, EZT2090F, EZTV2090S, EZTV2090F, YS2036, LT2036S, YS2042, LT2042S, YS2048, LT2048S, YS2060, LT2060S, YS2072, LT2072S, YS2090, LT2090S, VWPB2024, LWPT2024, VWPB2036, LWPT2036, VWPB2048, LWPT2048, VWPB2060, LWPT2060, VWPB2072, LWPT2072, VWPB2090, LWPT2090, 5155C81G04, 5155C81G05, 5155C81G06, SPDkkkVVVVfA, SPD050230L2A, SPD120230L3A, SPD160480Y3A, SPD200480Y3A, SPD100480Y2A, SPD050208Y2A, SPD100208Y2A,

SPD120480Y2C, 70010RBB8G, 70030KBDBR, 70032SBB8D, 6725D41H30, 114B361H01, 267P963H01, 267P963H02, 70210AL616, 1A85195H01, 70010RBBB8P

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00010	**BPRL3AEDCH**	Aftermarket bus connection kit BPRL3AEDCH (seller cross-ref to EAT KPRL3AED3)	mounts one EHD, ED, FD, HFD breaker (225 A max) C	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00009	**BPRL3AFDCH**	Aftermarket bus connection kit BPRL3AFDCH (seller cross-ref to EAT KPRL3AFD3)	mounts two EHD, FD, FDB, HFD breakers (150 A max) C	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-EAT-00184	**KPRL3ABA06**	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00185	**KPRL3ABA06-1**	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00186	**KPRL3ABA12**	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00187	**KPRL3ABA12-1**	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00188	**KPRL3ABA18**	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00189	**KPRL3ABA18-1**	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00190	**KPRL3ABA24**	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00191	**KPRL3ABA24-1**	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00209	**KPRL3AED2**	PRL3a horizontal F-frame breaker connector kit (FD...)	FD, HFD, FDC, ED, EDH, EDC 2-pole single mount 175-225 A. Frame device A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00208	**KPRL3AED3**	PRL3a horizontal F-frame breaker connector kit (FD...)	FD, HFD, FDC, ED, EDH, EDC 3-pole single mount 175-225 A, (1) 225 A ma A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00207	**KPRL3AFD1**	PRL3a horizontal F-frame breaker connector kit (EHD...)	EHD, FD, FDB, HFD, FDC 1-pole twin mount, 150 A max. Frame devices abo A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00206	**KPRL3AFD2**	PRL3a horizontal F-frame breaker connector kit (EHD...)	EHD, FD, FDB, HFD, FDC 2-pole twin mount, 150 A max. Frame devices abo A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00205	**KPRL3AFD3**	PRL3a horizontal F-frame breaker connector kit (EHD...)	EHD, FD, FDB, HFD, FDC 3-pole twin mount, (2) 150 A devices max. Frame A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00192	**KPRL3AGB06**	PRL3a horizontal 6-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00193	**KPRL3AGB06-1**	PRL3a horizontal 6-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00194	**KPRL3AGB12**	PRL3a horizontal 12-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00195	**KPRL3AGB12-1**	PRL3a horizontal 12-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00196	**KPRL3AGB18**	PRL3a horizontal 18-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00197	**KPRL3AGB18-1**	PRL3a horizontal 18-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00198	**KPRL3AGB24**	PRL3a horizontal 24-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00199	**KPRL3AGB24-1**	PRL3a horizontal 24-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00201	**KPRL3X22**	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)	PDG2 2-pole, single mount 175-225 A. Frame devices above 150 A must be **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00203	**KPRL3X22T**	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)	PDG2 2-pole twin mount, 150 A max. Frame devices above 150 A must be s **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00200	**KPRL3X23**	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)	PDG2 3-pole, single mount 175-225 A (1) 225 A max. Frame devices above **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00202	**KPRL3X23T**	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)	PDG2 3-pole twin mount, (2) 150 A devices max. Frame devices above 150 **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00168	**KPRL3XBA06**	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00169	**KPRL3XBA06-1**	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00170	**KPRL3XBA12**	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00171	**KPRL3XBA12-1**	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00172	**KPRL3XBA18**	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00173	**KPRL3XBA18-1**	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00174	**KPRL3XBA24**	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00175	**KPRL3XBA24-1**	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00176	**KPRL3XGB06**	PRL3X horizontal 6-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00177	**KPRL3XGB06-1**	PRL3X horizontal 6-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00178	**KPRL3XGB12**	PRL3X horizontal 12-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00179	**KPRL3XGB12-1**	PRL3X horizontal 12-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00180	**KPRL3XGB18**	PRL3X horizontal 18-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00181	**KPRL3XGB18-1**	PRL3X horizontal 18-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00182	**KPRL3XGB24**	PRL3X horizontal 24-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00183	**KPRL3XGB24-1**	PRL3X horizontal 24-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-OTH-00010	BPRL3AEDCH	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRL3AEDCH (seller cross-ref to EAT KPRL3AED3)

OEM part number	BPRL3AEDCH (Breaker King catalog/model number)	**C**	S626 distributor
Alternate / superseded numbers	KPRL3AED3 [equivalent] (seller cross-reference: 'Kit # ED3K replaces OEM KPRL3AED3')	**C**	same as above
	ED3K [alias] (seller/PCS kit number quoted in listing)	**C**	same as above
Description	Bus hardware for PRL3A panelboards; mounts one EHD, ED, FD, HFD breaker (225 A max) (seller listing text (may be truncated))	**C**	same as above
Breaker compatibility	mounts one EHD, ED, FD, HFD breaker (225 A max) (seller claim; compatibility from distributor only)	**C**	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	**C**	same as above
Replacement / successor	Seller states it replaces OEM KPRL3AED3 ('Kit # ED3K replaces OEM KPRL3AED3') (seller claim; not OEM-verified; no listing/UL statement on page)	**C**	same as above
Cross-links	Families: PRL3A		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00009	BPRL3AFDCH	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRL3AFDCH (seller cross-ref to EAT KPRL3AFD3)

OEM part number	BPRL3AFDCH (Breaker King catalog/model number)	**C**	S626 distributor
Alternate / superseded numbers	KPRL3AFD3 [equivalent] (seller cross-reference: 'Kit # FD3K replaces OEM KPRL3AFD3')	**C**	same as above
	FD3K [alias] (seller/PCS kit number quoted in listing)	**C**	same as above
Description	Bus hardware for PRL3A panelboards; mounts two EHD, FD, FDB, HFD breakers (150 A max) (seller listing text (may be truncated))	**C**	same as above
Breaker compatibility	mounts two EHD, FD, FDB, HFD breakers (150 A max) (seller claim; compatibility from distributor only)	**C**	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	**C**	same as above
Replacement / successor	Seller states it replaces OEM KPRL3AFD3 ('Kit # FD3K replaces OEM KPRL3AFD3') (seller claim; not OEM-verified; no listing/UL statement on page)	**C**	same as above
Cross-links	Families: PRL3A		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-EAT-00184	KPRL3ABA06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA06	**A**	S1, S2, S4, S3 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887257	**A**	S251 alias; skuPage.KPRL3ABA06 (General/Product specifications); oem_spec

Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, prl3a horizontally mounted connector kit assembly, phase connectors, deadfront cover, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S251 skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
	(2) 100 A devices maximum (twin pair); max 200 A connected to any one connector (Eaton web shows "140A max" identically on all KPRL3ABA*/KPRL3AGB*/KPRL3AFD2/KPRL3AFD3 pages, while RP01400001E (May 2022 p.22 Tables 29-30) gives "(2) 100 A devices maximum" for BA/GB kits and Table 32 gives "(2) 150 A devices maximum" for F-frame kits, plus "maximum amperes connected to any one connector cannot exceed 200 A". The uniform 140 A web value fits neither printed limit; treat RP01400001E as governing. The KPRL3X* PRL3X pages carry no amperage attribute.)	A	S3 p.22 Table 30 and intro; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 3 in, width 8.25 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Eaton web "140A max" vs RP device limits (100 A BA/GB, 150 A F-frame): ask Eaton which governs; 140 A matches neither.*		

EDH-EAT-00185	KPRL3ABA06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA06-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887271	A	S251 alias; skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton PRL3 PBconnector kit, phase connectors, dead-front cover, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec

Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec
Poles	Single-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S251 skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 3 in, width 8.25 in, weight 2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00186 **KPRL3ABA12** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA12	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887295	A	S251 alias; skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton PRL3 connector kit, phase connectors, deadfront cover, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above

Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S251 skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.25 in, height 3 in, width 8.25 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00187	KPRL3ABA12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA12-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887301	A	S251 alias; skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, PB connector kit, phase connectors, dead-front cover, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Poles	Single-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S251 skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec

Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 3 in, width 8.25 in, weight 2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00188 **KPRL3ABA18** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA18	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887318	A	S251 alias; skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton PRL3 panelboard connector kit, phase connectors, deadfront cover, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S251 skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 11 in, height 3 in, width 8.25 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00189 **KPRL3ABA18-1** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA18-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec

Alternate / superseded numbers	UPC 782114887332	A	S251 alias; skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, panelboard connector kit, hardware and instructions, phase connectors, deadfront cover (Eaton web product description)	A	S251 skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Poles	Single-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S251 skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00190	KPRL3ABA24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA24	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887349	A	S251 alias; skuPage.KPRL3ABA24 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, hardware and instructions, panelboard connector kit, phase connectors, deadfront cover (Eaton web product description)	A	S251 skuPage.KPRL3ABA24 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3ABA24 (General/Product specifications); oem_spec

Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3ABA24 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S251 skuPage.KPRL3ABA24 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3ABA24 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL3ABA24 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 13.75 in, height 3 in, width 8.25 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00191	KPRL3ABA24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA24-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00209	KPRL3AED2	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (FD...)

OEM part number	KPRL3AED2	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: FD, HFD, FDC, ED, EDH, EDC 2-pole single mount 175-225 A; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC 2-pole single mount 175-225 A. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00208	KPRL3AED3	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (FD...)

OEM part number	KPRL3AED3	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Alternate / superseded numbers	UPC 786689040796	A	S251 alias; skuPage.KPRL3AED3 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: FD, HFD, FDC, ED, EDH, EDC 3-pole single mount 175-225 A, (1) 225 A max; phases A/B/C	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
	Eaton, connector kit, available from regional satellite plants (Eaton web product description)	A	S251 skuPage.KPRL3AED3 (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC 3-pole single mount 175-225 A, (1) 225 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
	Eaton catalog note 'DATE DELETED: 01271997' (i.e. deleted 1997-01-27); SKU still shown as available from regional satellite plants	A	S251, S252 skuPage.KPRL3AED3 (General/Product specifications); oem_spec
Aftermarket / reproduction	Breaker King offers BPRL3AEDCH (kit # ED3K) as a replacement ('Kit # ED3K replaces OEM KPRL3AED3'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL3AED3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 25.5 in, height 3.3 in, width 9.6 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00207	KPRL3AFD1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (EHD...)

OEM part number	KPRL3AFD1	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: EHD, FD, FDB, HFD, FDC 1-pole twin mount, 150 A max; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 1-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00206	KPRL3AFD2	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (EHD...)

OEM part number	KPRL3AFD2	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Alternate / superseded numbers	UPC 782114887363	A	S251 alias; skuPage.KPRL3AFD2 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: EHD, FD, FDB, HFD, FDC 2-pole twin mount, 150 A max; phases A/C	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
	Eaton, panelboard connector kit, phase connectors, hardware and instructions, deadfront cover, prl3 conn kit (Eaton web product description)	A	S251 skuPage.KPRL3AFD2 (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3AFD2 (General/Product specifications); oem_spec
Breaker compatibility	EHD, FD, FDB, HFD, FDC 2-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
	EHD, FD, FDB, HFD, FDC breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3AFD2 (General/Product specifications); oem_spec
Poles	Single-phase, three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	same as above
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3AFD2 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.23; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL3AFD2 (General/Product specifications); oem_spec
Installation requirements	Order breakers separately when ordering connector kit. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 2.25 in, height 1.75 in, width 2.6 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00205	KPRL3AFD3	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (EHD...)

OEM part number	KPRL3AFD3	A	S1, S2, S4, S251 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Alternate / superseded numbers	UPC 782114887370	A	S251 alias; skuPage.KPRL3AFD3 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: EHD, FD, FDB, HFD, FDC 3-pole twin mount, (2) 150 A devices max; phases A/B/C	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
	Eaton panelboard connector kit, deadfront cover, phase connectors, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL3AFD3 (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3AFD3 (General/Product specifications); oem_spec
Breaker compatibility	EHD, FD, FDB, HFD, FDC 3-pole twin mount, (2) 150 A devices max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
	EHD, FD, FDB, HFD, FDC breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3AFD3 (General/Product specifications); oem_spec
Poles	Single-phase, three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	same as above
	(2) 150 A devices maximum (twin pair); max 200 A connected to any one connector (Eaton web shows "140A max" identically on all KPRL3ABA*/KPRL3AGB*/KPRL3AFD2/KPRL3AFD3 pages, while RP01400001E (May 2022 p.22 Tables 29-30) gives "(2) 100 A devices maximum" for BA/GB kits and Table 32 gives "(2) 150 A devices maximum" for F-frame kits, plus "maximum amperes connected to any one connector cannot exceed 200 A". The uniform 140 A web value fits neither printed limit; treat RP01400001E as governing. The KPRL3X* PRL3X pages carry no amperage attribute.)	A	S3 p.22 intro; p.23 Table 32; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3AFD3 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.23; oem_spec
Aftermarket / reproduction	Breaker King offers BPRL3AFDCH (kit # FD3K) as a replacement ('Kit # FD3K replaces OEM KPRL3AFD3'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
Listing / approvals	UL Listed	A	S251 skuPage.KPRL3AFD3 (General/Product specifications); oem_spec
Installation requirements	Order breakers separately when ordering connector kit. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00192	KPRL3AGB06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB06	A	S1, S2, S4, S3 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887387	A	S251 alias; skuPage.KPRL3AGB06 (General/Product specifications); oem_spec

Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, deadfront cover, panelboard connector kit, phase connectors, hardware and instructions (Eaton web product description)	**A**	S251 skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Installation location	Mounting: Twin	**A**	S251 skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	GB, GHB, GHBS breakers (Eaton web 'Used with' attribute)	**A**	S251 skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	**A**	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	**A**	S251 skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
	(2) 100 A devices maximum (twin pair); max 200 A connected to any one connector (Eaton web shows "140A max" identically on all KPRL3ABA*/KPRL3AGB*/KPRL3AFD2/KPRL3AFD3 pages, while RP01400001E (May 2022 p.22 Tables 29-30) gives "(2) 100 A devices maximum" for BA/GB kits and Table 32 gives "(2) 150 A devices maximum" for F-frame kits, plus "maximum amperes connected to any one connector cannot exceed 200 A". The uniform 140 A web value fits neither printed limit; treat RP01400001E as governing. The KPRL3X* PRL3X pages carry no amperage attribute.)	**A**	S3 p.22 Table 30 and intro; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	**A**	S251 skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	**A**	S251 skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.4 in, height 3.5 in, width 8.25 in, weight 2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Eaton web "140A max" vs RP device limits (100 A BA/GB, 150 A F-frame): ask Eaton which governs; 140 A matches neither.*		

EDH-EAT-00193	KPRL3AGB06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB06-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00194	KPRL3AGB12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 12-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB12	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887400	A	S251 alias; skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, panelboard connector kit deadfront cover, hardware and instructions, phase connectors (Eaton web product description)	A	S251 skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	GB, GHB, GHBS breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S251 skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec

Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.2 in, height 3.5 in, width 8.25 in, weight 2.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00195 **KPRL3AGB12-1** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 12-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB12-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887417	A	S251 alias; skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, panelboard connector kit, phase connectors, deadfront cover, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	GB, GHB, GHBS breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Poles	Single-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S251 skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8 in, height 4.5 in, width 6 in, weight 3.8 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00196 **KPRL3AGB18** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 18-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB18	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec

Alternate / superseded numbers	UPC 782114887424	A	S251 alias; skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, phase connectors, panelboard connector kit, deadfront cover, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	GB, GHB, GHBS breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S251 skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 10.3 in, height 3.5 in, width 8.25 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00197 **KPRL3AGB18-1** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 18-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB18-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887431	A	S251 alias; skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, panelboard connector kit, phase connectors, deadfront cover (Eaton web product description)	A	S251 skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec

Installation location	Mounting: Twin	A	S251 skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	GB, GHB, GHBS breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Poles	Single-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S251 skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 10.3 in, height 3.5 in, width 8.25 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00198 **KPRL3AGB24** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 24-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB24	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887448	A	S251 alias; skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, panelboard connector kit, phase connectors, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S251 skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	GB, GHB, GHBS breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec

	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S251 skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 13 in, height 3.5 in, width 8.25 in, weight 2.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00199 **KPRL3AGB24-1** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 24-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB24-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*s1 (2021) Table 30 prints 'KPRL3XGB24-1' in the PRL3a row - treated as typo; s2/s4 give KPRL3AGB24-1.*		

EDH-EAT-00201	KPRL3X22	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)

OEM part number	KPRL3X22	**A**	S1 s1 p.23 Table 31; oem_spec
Alternate / superseded numbers	UPC 786689242664	**A**	S251 alias; skuPage.KPRL3X22 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: PDG2 2-pole, single mount 175-225 A; phases A/C	**A**	S1 s1 p.23 Table 31; oem_spec
	Eaton, panelboard connector kit, mounting brackets, copper connectors (Eaton web product description)	**A**	S251 skuPage.KPRL3X22 (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	**C**	S7 p.22.3-1; inference
Breaker compatibility	PDG2 2-pole, single mount 175-225 A. Frame devices above 150 A must be single mounted; no twin mounting.	**A**	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	**A**	S1 p.23; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	**A**	S251 skuPage.KPRL3X22 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.23; oem_spec
Listing / approvals	UL Listed	**A**	S251 skuPage.KPRL3X22 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	**A**	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00203	KPRL3X22T	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)

OEM part number	KPRL3X22T	A	S1 s1 p.23 Table 31; oem_spec
Alternate / superseded numbers	UPC 786689242671	A	S251 alias; skuPage.KPRL3X22T (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: PDG2 2-pole twin mount, 150 A max; phases A/C	A	S1 s1 p.23 Table 31; oem_spec
	Eaton, panelboard connector kit, mounting brackets, covers, hardware and instructions, copper connectors, (Eaton web product description)	A	S251 skuPage.KPRL3X22T (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	PDG2 2-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL3X22T (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.23; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL3X22T (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00200	KPRL3X23	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)

OEM part number	KPRL3X23	A	S1 s1 p.23 Table 31; oem_spec
Alternate / superseded numbers	UPC 786689242640	A	S251 alias; skuPage.KPRL3X23 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: PDG2 3-pole, single mount 175-225 A (1) 225 A max; phases A/B/C	A	S1 s1 p.23 Table 31; oem_spec
	Eaton, panelboard connector kit, copper connectors, covers, hardware and instructions, mounting brackets (Eaton web product description)	A	S251 skuPage.KPRL3X23 (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	PDG2 3-pole, single mount 175-225 A (1) 225 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL3X23 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.23; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL3X23 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 6.4 in, height 4.6 in, width 14.3 in, weight 2.55 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00202	KPRL3X23T	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)

OEM part number	KPRL3X23T	A	S1 s1 p.23 Table 31; oem_spec
Alternate / superseded numbers	UPC 786689242657	A	S251 alias; skuPage.KPRL3X23T (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: PDG2 3-pole twin mount, (2) 150 A devices max; phases A/B/C	A	S1 s1 p.23 Table 31; oem_spec
	Eaton, panelboard connector kit, copper connectors, covers, mounting brackets, hardware and instructions, prl3x conn kit twn mt 150a 3p 3ph pd2 bk (Eaton web product description)	A	S251 skuPage.KPRL3X23T (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	PDG2 3-pole twin mount, (2) 150 A devices max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL3X23T (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.23; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL3X23T (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 6.4 in, height 2.2 in, width 9.4 in, weight 2.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00168	KPRL3XBA06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA06	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346935	**A**	S251 alias; skuPage.KPRL3XBA06 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 6 CKT 3 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XBA06 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XBA06 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00169	KPRL3XBA06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA06-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346959	**A**	S251 alias; skuPage.KPRL3XBA06-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 6 CKT 1 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XBA06-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XBA06-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00170	KPRL3XBA12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA12	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346942	**A**	S251 alias; skuPage.KPRL3XBA12 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 12 CKT 3 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XBA12 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XBA12 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00171	KPRL3XBA12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA12-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346966	**A**	S251 alias; skuPage.KPRL3XBA12-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 12 CKT 1 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XBA12-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XBA12-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00172	KPRL3XBA18	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA18	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346973	**A**	S251 alias; skuPage.KPRL3XBA18 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 18 CKT 3 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XBA18 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XBA18 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00173	KPRL3XBA18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA18-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346980	**A**	S251 alias; skuPage.KPRL3XBA18-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 18 CKT 1 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XBA18-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XBA18-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00174	KPRL3XBA24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA24	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346997	**A**	S251 alias; skuPage.KPRL3XBA24 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 24 CKT 3 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XBA24 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XBA24 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00175	KPRL3XBA24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA24-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347031	**A**	S251 alias; skuPage.KPRL3XBA24-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 24 CKT 1 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XBA24-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XBA24-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00176	KPRL3XGB06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB06	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347048	**A**	S251 alias; skuPage.KPRL3XGB06 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	PRL3X CONN KIT GHB 6 CKT 3 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XGB06 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XGB06 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00177	KPRL3XGB06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB06-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347000	**A**	S251 alias; skuPage.KPRL3XGB06-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 6 CKT 1 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XGB06-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XGB06-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00178	KPRL3XGB12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB12	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347017	**A**	S251 alias; skuPage.KPRL3XGB12 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 12 CKT 3 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XGB12 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XGB12 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00179	KPRL3XGB12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB12-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347024	**A**	S251 alias; skuPage.KPRL3XGB12-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 12 CKT 1 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XGB12-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XGB12-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00180	KPRL3XGB18	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB18	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347062	**A**	S251 alias; skuPage.KPRL3XGB18 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 18 CKT 3 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XGB18 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XGB18 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00181	KPRL3XGB18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB18-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347079	**A**	S251 alias; skuPage.KPRL3XGB18-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 18 CKT 1 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XGB18-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XGB18-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00182	KPRL3XGB24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB24	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347086	**A**	S251 alias; skuPage.KPRL3XGB24 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 24 CKT 3 PH (Eaton web product description)	**A**	S251 skuPage.KPRL3XGB24 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S251 skuPage.KPRL3XGB24 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00183	KPRL3XGB24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB24-1	A	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347093	A	S251 alias; skuPage.KPRL3XGB24-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 24 CKT 1 PH (Eaton web product description)	A	S251 skuPage.KPRL3XGB24-1 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL 67	A	S251 skuPage.KPRL3XGB24-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00261	**4176B51**	PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00264	**4176B56**	PRL3a/3X deadfront device cover: LCL vertical cover 21X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00263	**4176B57**	PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00259	**4176B60**	PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00260	**4176B61**	PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00275	**4176B66**	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00277	**4176B67**	PRL3a/3X horizontal deadfront cover: BA/BAB/BABR P/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00267	**4176B68**	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (PRL3a, pre-2021)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00278	**4176B69**	PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00262	**4176B70**	PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cover 9X	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00265	**4176B79**	PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00276	**4176B80**	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00280	**4178B08**	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horizontal cover, 6-48 ckt (H01-H08)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00281	**4179B39**	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horizontal cover, 4-32 ckt (H01-H08)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00282	**4179B40**	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00283	**4179B41**	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 3-pole cover 3X	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00284	**4179B42**	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 2-pole cover 2X	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00266	**4180B79**	PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt switch vertical cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00279	**4180B91**	PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00268	**4180B93**	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2021)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00255	**42C8076**	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (PRL3a) vertical cover, 7X, 4/0 max terminal	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00256	**42C8077**	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL3a) vertical cover, 10X, 300 kcmil max terminal	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00270	**42C8078**	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3 pole horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00271	**42C8079**	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00272	**42C8080**	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00273	**42C8081**	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 2-pole cover 2X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00274	**42C8082**	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 3-pole cover 3X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00254	**6559C59**	PRL3a/3X deadfront assembly frame (rails and end covers)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00261	4176B51	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)

OEM part number	4176B51	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: L-Frame vertical cover 17X (PRL3a)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00264	4176B56	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: LCL vertical cover 21X

OEM part number	4176B56	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01/H02 top; H03/H04 bottom (without/with lock-offs)	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: LCL vertical cover 21X	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00263	4176B57	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only

OEM part number	4176B57	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: LA-P vertical cover 21X, top only	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00259	4176B60	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)

OEM part number	4176B60	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 bottom/H02 with lock-offs; H03 top/H04 with lock-offs	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: J-Frame vertical cover 14X (PRL3a)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00260	4176B61	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)

OEM part number	4176B61	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: K-Frame vertical cover 15X (PRL3a)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00275	4176B66	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3a)

OEM part number	4176B66	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3a). Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A · Breakers: CA/CAH/HCA 225 A frame		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00277	4176B67	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP horizontal cover

OEM part number	4176B67	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	6 ckt 3X H01; 12 ckt 5X H02; 18 ckt 8X H03; 24 ckt 10X H04	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP horizontal cover. Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00267	4176B68	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (PRL3a, pre-2021)

OEM part number	4176B68	A	S2, S3 s2 p.24 Table 27; oem_spec
Alternate / superseded numbers	H01/H03 top; H04/H05 bottom (without / with lock-offs)	A	S2 style_number; p.24; oem_spec
	42C8076	C	S1, S2 superseded_by; inference
Description	EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (PRL3a, pre-2021)	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00278	4176B69	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cover

OEM part number	4176B69	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	6 ckt 3X H01; 12/5X H02; 18/8X H03; 24/10X H04	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cover. Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00262	4176B70	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cover 9X

OEM part number	4176B70	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 FCL; H02 FB-P	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: FCL (H01) and FB-P top-only (H02) vertical cover 9X	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Current-limiting FCL / LCL (and FDB+LFB), TRI-PAC integrally fused (FB-P, LA-P, NB-P)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00265	4176B79	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X

OEM part number	4176B79	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	Bottom H01 (no L/O), H02 (2 L/O), H03 (1 L/O RT), H04 (1 L/O LT); top H05, H07 (1 L/O RT), H08 (1 L/O LT)	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: J-Frame sub-feed twin cover 20X	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00276	4176B80	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3a)

OEM part number	4176B80	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3a). Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A · Breakers: CA/CAH/HCA 225 A frame		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00280	4178B08	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horizontal cover, 6-48 ckt (H01-H08)

OEM part number	4178B08	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8078	C	S1, S2 superseded_by; inference
Description	F-frame twin-mounted 1-3 pole horizontal cover, 6-48 ckt (H01-H08)	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00281	4179B39	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horizontal cover, 4-32 ckt (H01-H08)

OEM part number	4179B39	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8079	C	S1, S2 superseded_by; inference
Description	F-frame twin-mounted 1-2 pole horizontal cover, 4-32 ckt (H01-H08)	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00282	4179B40	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X

OEM part number	4179B40	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8080	C	S1, S2 superseded_by; inference
Description	F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00283	4179B41	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 3-pole cover 3X

OEM part number	4179B41	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8082	C	S1, S2 superseded_by; inference
Description	FD/HFD/FDC/ED/EDH/EDC single-mounted 3-pole cover 3X	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00284	4179B42	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 2-pole cover 2X

OEM part number	4179B42	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8081	C	S1, S2 superseded_by; inference
Description	FD/HFD/FDC/ED/EDH/EDC single-mounted 2-pole cover 2X	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00266	4180B79	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt switch vertical cover

OEM part number	4180B79	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	PT363 top H01 / bottom H02 (7X); PT364 top H03 / bottom H04 (9X)	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: PT363 (100 A) / PT364 (200 A) pullout bolt switch vertical cover	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00279	4180B91	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover

OEM part number	4180B91	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	Controller 5X H01; Expansion 7X H02, 16X H03	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: Pow-R-Command controller / expansion cover. Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00268	4180B93	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2021)

OEM part number	4180B93	A	S2, S3 s2 p.24 Table 27; oem_spec
Alternate / superseded numbers	H01/H03 top; H04/H05 bottom (without / with lock-offs)	A	S2 style_number; p.24; oem_spec
	42C8077	C	S1, S2 superseded_by; inference
Description	FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2021)	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00255	42C8076	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (PRL3a) vertical cover, 7X, 4/0 max terminal

OEM part number	42C8076	A	S1 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom (same with/without lock-offs)	A	S1 style_number; pp.26-27; oem_spec
	4176B68 (4176B68 (H01 top/H03 top w lock-off; H04 bottom/H05 bottom w lock-off) in same PRL3a table row in 2009/2017 editions)	C	S1, S2, S3 supersedes; inference
Description	Vertical device deadfront cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (PRL3a) vertical cover, 7X, 4/0 max terminal	A	S1 pp.26-27; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00256	42C8077	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL3a) vertical cover, 10X, 300 kcmil max terminal

OEM part number	42C8077	A	S1 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; pp.26-27; oem_spec
	4180B93 (4180B93 (H01/H03 top; H04/H05 bottom) in same PRL3a table row in 2009/2017 editions)	C	S1, S2, S3 supersedes; inference
Description	Vertical device deadfront cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL3a) vertical cover, 10X, 300 kcmil max terminal	A	S1 pp.26-27; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00270	42C8078	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3 pole horizontal cover

OEM part number	42C8078	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	6 ckt 3X H01; 12/6X H02; 18/9X H03; 24/12X H04; 30/15X H05; 36/18X H06; 42/21X H07; 48/24X H08	A	S1 style_number; pp.28-29; oem_spec
	4178B08 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3 pole horizontal cover. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00271	42C8079	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizontal cover

OEM part number	42C8079	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	4 ckt 2X H01; 8/4X H02; ... 32/16X H08	A	S1 style_number; pp.28-29; oem_spec
	4179B39 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizontal cover. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00272	42C8080	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X

OEM part number	42C8080	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
	4179B40 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00273	42C8081	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 2-pole cover 2X

OEM part number	42C8081	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
	4179B42 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 2-pole cover 2X. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00274	42C8082	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 3-pole cover 3X

OEM part number	42C8082	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
	4179B41 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 3-pole cover 3X. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00254	6559C59	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront assembly frame (rails and end covers)

OEM part number	6559C59	A	S1, S2 s1 p.25 Table 37; oem_spec
Alternate / superseded numbers	Chassis height 14X G01; 23X G02; 31X G03; 40X G04; 53X G05	A	S1 style_number; p.25; oem_spec
Description	Assembly includes frame only (two rails and two end covers); device covers ordered separately; all connector kits ship with a deadfront cover for that device	A	S1 p.25 note a; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.25; oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00269	**4176B72**	PRL3a/3X neutral / blank cover 1X-12X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00286	**4178B06H01**	PRL3a F-frame 1-pole provision filler (panels built before April 2019)	—	Listed through Oct 2017 edition; replaced by 42C8083H01 in A
EDH-EAT-00285	**42C8083H01**	PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00287	**6555C40H01**	PRL3a C-frame (CA/CAH/HCA) 2-pole deadfront blank filler	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00288	**6555C41H01**	PRL3a C-frame (CA/CAH/HCA) 3-pole deadfront blank filler	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00269	4176B72	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a/3X neutral / blank cover 1X-12X

OEM part number	4176B72	A	S1, S2, S4 s1 pp.26-27; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	H01 = 1X ... H12 = 12X	A	S1, S4 style_number; oem_spec
Description	Neutral/blank deadfront cover in X increments	A	S1 oem_spec
Dimensions	Fills 1 3/8 in (1X) to 16 1/2 in (12X) height; 13 in wide (for 20 in and 28 in wide boxes)	A	S4 p.7 Table 12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00286	4178B06H01	Cutler-Hammer	filler-plate	LISTED THROUGH OCT 201

PRL3a F-frame 1-pole provision filler (panels built before April 2019)

OEM part number	4178B06H01	A	S2, S3, S4, S9 s2 p.25 Table 29; s4 p.12; oem_spec
Alternate / superseded numbers	42C8083H01	B	S1, S8, S9 superseded_by; oem_spec
Description	PRL3a deadfront cover blank filler, F-Frame, 1, 2 or 3 poles (Pow-R-Kit: 'PRL 3a F-Frame 1-Pole Provision Fillers')	A	S2, S4 oem_spec
Application	Panels built prior to April 2019	C	S9 distributor
Finish / plating	Black	C	same as above
Status	Listed through Oct 2017 edition; replaced by 42C8083H01 in April 2021 edition; still listed by Rexel (UPC 786685467672)	B	S1, S3, S9 oem_spec
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00285	42C8083H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019)

OEM part number	42C8083H01	A	S1, S8 s1 p.30 Tables 42-43; oem_spec
Alternate / superseded numbers	4178B06H01 (Same table row (F-Frame blank filler) in 2017 edition; distributors describe 4178B06H01 as for panels built prior to April 2019 and 42C8083H01 as after April 2019 - not interchangeable across build dates)	B	S1, S3, S8, S9 supersedes; oem_spec
Description	Deadfront cover blank filler, F-Frame (PRL3a) / PDG2 (PRL3X), 1, 2 or 3 poles	A	S1 p.30; oem_spec
Application	Panels built after April 2019	C	S8 distributor
Dimensions	Length 4.220 in	C	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.30; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00287	6555C40H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a C-frame (CA/CAH/HCA) 2-pole deadfront blank filler

OEM part number	6555C40H01	A	S1, S2 s1 p.30 Table 43; oem_spec
Description	Deadfront cover blank filler, C-Frame, 2-pole	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.30; oem_spec
Cross-links	Families: PRL3A · Breakers: CA/CAH/HCA 225 A frame		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00288	6555C41H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a C-frame (CA/CAH/HCA) 3-pole deadfront blank filler

OEM part number	6555C41H01	**A**	S1, S2 s1 p.30 Table 43; oem_spec
Description	Deadfront cover blank filler, C-Frame, 3-pole	**A**	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.30; oem_spec
Cross-links	Families: PRL3A · Breakers: CA/CAH/HCA 225 A frame		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00220	**5078A98**	PRL3a/PRL3X service entrance bonding jumper kit	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00220	5078A98	Cutler-Hammer	hardware-kit	LISTED AS STOCK RENEWA

PRL3a/PRL3X service entrance bonding jumper kit

OEM part number	5078A98	**A**	S1, S2, S4 s1 p.24 Table 34; oem_spec
Alternate / superseded numbers	Mechanical: 100 A G01-G04, 250-600 A G13-G16; Crimp: 100 A G05-G08, 250-600 A G17-G20; Copper lugs: 100 A G09-G12, 250-600 A G21-G24 (order tin Al / bare Cu / silver Cu / tin Cu)	**A**	S1 style_number; p.24; oem_spec
Description	Service entrance bonding jumper kit; example 100 A tin-plated aluminum = 5078A98G01	**A**	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Spd Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01230	**PDSPD2403SA2A-K3**	Eaton integrated panelboard SPD PDSPD2403SA2A-K3	Direct bus mounted **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01228	**PDSPD4803SA2A-K3**	Eaton integrated panelboard SPD PDSPD4803SA2A-K3	Direct bus mounted **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-01230	PDSPD2403SA2A-K3	Eaton	spd-kit	ACTIVE EATON PRODUCT P

Eaton integrated panelboard SPD PDSPD2403SA2A-K3

OEM part number	PDSPD2403SA2A-K3	A	S251 oem_spec
Alternate / superseded numbers	UPC 786689056261	A	S251 alias; skuPage.PDSPD2403SA2A-K3 (General/Product specifications); oem_spec
Description	Eaton Surge Protection Device for sub-panel, RSPF Series, F Frame, 120/208Y, 127/220Y, 240D rating, integrated , Basic feature package plus filtering, Direct Bus Mounted, with KPRL3AFD3 Provision Kit	A	same as above
Application	Integral SPD; Three-phase; Operating temperature; -40 to 60 °C	A	same as above
Breaker compatibility	Direct bus mounted (Eaton web 'Used with' attribute)	A	same as above
Voltage rating	240V	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL 1449; UL Listed	A	S251 skuPage.PDSPD2403SA2A-K3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6 in, height 3.81 in, width 4.13 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Warranty	2 year	A	same as above
Cross-links	Families: PRL3A		
Requires	KPRL3AFD3 (EDH-EAT-00205)		
Not yet documented	Dimensions, mounting_hardware		

EDH-EAT-01228	PDSPD4803SA2A-K3	Eaton	spd-kit	ACTIVE EATON PRODUCT P

Eaton integrated panelboard SPD PDSPD4803SA2A-K3

OEM part number	PDSPD4803SA2A-K3	A	S251 oem_spec
Alternate / superseded numbers	UPC 786689056292	A	S251 alias; skuPage.PDSPD4803SA2A-K3 (General/Product specifications); oem_spec
Description	Eaton Surge Protection Device for sub-panel, RSPF Series, F Frame, 230/400Y, 480D rating, 277/480Y, integrated , Basic feature package plus filtering, Direct Bus Mounted, with KPRL3AFD3 Provision Kit	A	same as above
Application	Integral SPD; Three-phase; Operating temperature; -40 to 60 °C	A	same as above
Breaker compatibility	Direct bus mounted (Eaton web 'Used with' attribute)	A	same as above
Voltage rating	480 V	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL 1449; UL Listed	A	S251 skuPage.PDSPD4803SA2A-K3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6 in, height 3.81 in, width 4.13 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Warranty	2 year	A	same as above
Cross-links	Families: PRL3A		
Requires	KPRL3AFD3 (EDH-EAT-00205)		
Not yet documented	Dimensions, mounting_hardware		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01309	**A1X1LTK**	Eaton F-frame 1A/1B auxiliary switch field kit	Series C F-frame (not 4-pole) A	unknown
EDH-EAT-01305	**A1X1PK**	Eaton F-frame 1A/1B auxiliary switch field kit	Series C F-frame (not 4-pole) A	unknown
EDH-EAT-01311	**A1X1RPKFDE**	Eaton F-frame 1A/1B auxiliary switch field kit for 3-pole F-frame with electronic trip unit	Series C F-frame (not 4-pole) A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01310	**A1X1RTK**	Eaton F-frame 1A/1B auxiliary switch field kit	Series C F-frame (not 4-pole) **A**	unknown
EDH-EAT-01307	**A2X1LPK**	Eaton F-frame 2A/2B auxiliary switch field kit	Series C F-frame (not 4-pole) **A**	unknown
EDH-EAT-01308	**A2X1RPK**	Eaton F-frame 2A/2B auxiliary switch field kit	Series C F-frame (not 4-pole) **A**	unknown
EDH-EAT-01306	**E1X1PK**	Eaton F-frame 1A/1B auxiliary switch field kit (low-level/electronic circuit rated 125 V max)	Series C F-frame (not 4-pole) **A**	unknown
EDH-EAT-01312	**SNT1LP03K**	Eaton F-frame shunt trip field kit, 12-24 Vac or dc, left-pole, pigtail	Series C F-frame and HMCP (F); not 4-pole **A**	unknown
EDH-EAT-01313	**SNT1LP08K**	Eaton F-frame shunt trip field kit, 48-127 Vac or 48-60 Vdc, left-pole, pigtail	Series C F-frame and HMCP (F); not 4-pole **A**	unknown
EDH-EAT-01314	**SNT1LP12K**	Eaton F-frame shunt trip field kit, 208-380 Vac or 110-127 Vdc, left-pole, pigtail	Series C F-frame and HMCP (F); not 4-pole **A**	unknown
EDH-EAT-01315	**SNT1LP18K**	Eaton F-frame shunt trip field kit, 415-600 Vac or 220-250 Vdc, left-pole, pigtail	Series C F-frame and HMCP (F); not 4-pole **A**	unknown
EDH-EAT-01316	**SNT1RP03K**	Eaton F-frame shunt trip field kit, 12-24 Vac or dc, right/neutral-pole, pigtail	Series C F-frame and HMCP (F); not 4-pole **A**	unknown
EDH-EAT-01317	**SNT1RP08K**	Eaton F-frame shunt trip field kit, 48-127 Vac or 48-60 Vdc, right/neutral-pole, pigtail	Series C F-frame and HMCP (F); not 4-pole **A**	unknown
EDH-EAT-01318	**SNT1RP12K**	Eaton F-frame shunt trip field kit, 208-380 Vac or 110-127 Vdc, right/neutral-pole, pigtail	Series C F-frame and HMCP (F); not 4-pole **A**	unknown
EDH-EAT-01319	**SNT1RP18K**	Eaton F-frame shunt trip field kit, 415-600 Vac or 220-250 Vdc, right/neutral-pole, pigtail	Series C F-frame and HMCP (F); not 4-pole **A**	unknown
EDH-EAT-01320	**UVH1LP08K**	Eaton F-frame undervoltage release field kit, 110-127 Vac, left pole	Series C F-frame **A**	unknown
EDH-EAT-01321	**UVH1LP11K**	Eaton F-frame undervoltage release field kit, 208-240 Vac, left pole	Series C F-frame **A**	unknown
EDH-EAT-01322	**UVH1LP15K**	Eaton F-frame undervoltage release field kit, 380-480 Vac, left pole	Series C F-frame **A**	unknown
EDH-EAT-01325	**UVH1LP21K**	Eaton F-frame undervoltage release field kit, 24 Vdc, left pole	Series C F-frame **A**	unknown
EDH-EAT-01323	**UVH1RP08K**	Eaton F-frame undervoltage release field kit, 110-127 Vac, right pole	Series C F-frame **A**	unknown
EDH-EAT-01324	**UVH1RP11K**	Eaton F-frame undervoltage release field kit, 208-240 Vac, right pole	Series C F-frame **A**	unknown

EDH-EAT-01309	**A1X1LTK**	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame 1A/1B auxiliary switch field kit

OEM part number	A1X1LTK	**A**	S184 p. 12-224, Table 12-397 F-Frame Auxiliary Switch - Field Installation Kits (pigtail leads; not UL listed for field installation); oem_spec
Description	1A/1B auxiliary switch field kit, terminal block, left pole. Not listed with UL for field installation; 18 AWG pigtail leads.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series C F-frame (not 4-pole)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01305	A1X1PK	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame 1A/1B auxiliary switch field kit

OEM part number	A1X1PK	A	S184 p. 12-224, Table 12-397 F-Frame Auxiliary Switch - Field Installation Kits (pigtail leads; not UL listed for field installation); oem_spec
Description	1A/1B auxiliary switch field kit, pigtail leads, left or right pole. Not listed with UL for field installation; 18 AWG pigtail leads.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame (not 4-pole)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01311	A1X1RPKFDE	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame 1A/1B auxiliary switch field kit for 3-pole F-frame with electronic trip unit

OEM part number	A1X1RPKFDE	A	S184 p. 12-224, Table 12-398; oem_spec
Description	1A/1B auxiliary switch field kit for 3-pole F-frame with electronic trip unit, right pole. Not listed with UL for field installation; 18 AWG pigtail leads.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame (not 4-pole)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01310	A1X1RTK	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame 1A/1B auxiliary switch field kit

OEM part number	A1X1RTK	A	S184 p. 12-224, Table 12-397 F-Frame Auxiliary Switch - Field Installation Kits (pigtail leads; not UL listed for field installation); oem_spec
Description	1A/1B auxiliary switch field kit, terminal block, right pole. Not listed with UL for field installation; 18 AWG pigtail leads.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame (not 4-pole)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01307	A2X1LPK	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame 2A/2B auxiliary switch field kit

OEM part number	A2X1LPK	A	S184 p. 12-224, Table 12-397 F-Frame Auxiliary Switch - Field Installation Kits (pigtail leads; not UL listed for field installation); oem_spec
Description	2A/2B auxiliary switch field kit, pigtail, left pole. Not listed with UL for field installation; 18 AWG pigtail leads.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame (not 4-pole)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01308	A2X1RPK	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame 2A/2B auxiliary switch field kit

OEM part number	A2X1RPK	**A**	S184 p. 12-224, Table 12-397 F-Frame Auxiliary Switch - Field Installation Kits (pigtail leads; not UL listed for field installation); oem_spec
Description	2A/2B auxiliary switch field kit, pigtail, right/neutral pole. Not listed with UL for field installation; 18 AWG pigtail leads.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series C F-frame (not 4-pole)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01306	E1X1PK	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame 1A/1B auxiliary switch field kit (low-level/electronic circuit rated 125 V max)

OEM part number	E1X1PK	**A**	S184 p. 12-224, Table 12-397 F-Frame Auxiliary Switch - Field Installation Kits (pigtail leads; not UL listed for field installation); oem_spec
Description	1A/1B auxiliary switch field kit (low-level/electronic circuit rated 125 V max), pigtail, left pole. Not listed with UL for field installation; 18 AWG pigtail leads.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series C F-frame (not 4-pole)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01312	SNT1LP03K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame shunt trip field kit, 12-24 Vac or dc, left-pole, pigtail

OEM part number	SNT1LP03K	**A**	S184 p. 12-228, Table 12-422 F-Frame and HMCP (F) Shunt Trip - Field Installation Kits (not UL listed for field installation); oem_spec
Description	Shunt trip field installation kit, left-pole mounting, 12-24 Vac or dc, 18 AWG pigtail leads (terminal-block version SNT1LT03K). Not UL listed for field installation.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series C F-frame and HMCP (F); not 4-pole	**A**	same as above
Voltage rating	12-24 Vac or dc	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01313	SNT1LP08K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame shunt trip field kit, 48-127 Vac or 48-60 Vdc, left-pole, pigtail

OEM part number	SNT1LP08K	A	S184 p. 12-228, Table 12-422 F-Frame and HMCP (F) Shunt Trip - Field Installation Kits (not UL listed for field installation); oem_spec
Description	Shunt trip field installation kit, left-pole mounting, 48-127 Vac or 48-60 Vdc, 18 AWG pigtail leads (terminal-block version SNT1LT08K). Not UL listed for field installation.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame and HMCP (F); not 4-pole	A	same as above
Voltage rating	48-127 Vac or 48-60 Vdc	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01314	SNT1LP12K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame shunt trip field kit, 208-380 Vac or 110-127 Vdc, left-pole, pigtail

OEM part number	SNT1LP12K	A	S184 p. 12-228, Table 12-422 F-Frame and HMCP (F) Shunt Trip - Field Installation Kits (not UL listed for field installation); oem_spec
Description	Shunt trip field installation kit, left-pole mounting, 208-380 Vac or 110-127 Vdc, 18 AWG pigtail leads (terminal-block version SNT1LT12K). Not UL listed for field installation.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame and HMCP (F); not 4-pole	A	same as above
Voltage rating	208-380 Vac or 110-127 Vdc	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01315	SNT1LP18K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame shunt trip field kit, 415-600 Vac or 220-250 Vdc, left-pole, pigtail

OEM part number	SNT1LP18K	A	S184 p. 12-228, Table 12-422 F-Frame and HMCP (F) Shunt Trip - Field Installation Kits (not UL listed for field installation); oem_spec
Description	Shunt trip field installation kit, left-pole mounting, 415-600 Vac or 220-250 Vdc, 18 AWG pigtail leads (terminal-block version SNT1LT18K). Not UL listed for field installation.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame and HMCP (F); not 4-pole	A	same as above
Voltage rating	415-600 Vac or 220-250 Vdc	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01316	SNT1RP03K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame shunt trip field kit, 12-24 Vac or dc, right/neutral-pole, pigtail

OEM part number	SNT1RP03K	A	S184 p. 12-228, Table 12-422 F-Frame and HMCP (F) Shunt Trip - Field Installation Kits (not UL listed for field installation); oem_spec
Description	Shunt trip field installation kit, right/neutral-pole mounting, 12-24 Vac or dc, 18 AWG pigtail leads (terminal-block version SNT1RT03K). Not UL listed for field installation.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame and HMCP (F); not 4-pole	A	same as above
Voltage rating	12-24 Vac or dc	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01317	SNT1RP08K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame shunt trip field kit, 48-127 Vac or 48-60 Vdc, right/neutral-pole, pigtail

OEM part number	SNT1RP08K	A	S184 p. 12-228, Table 12-422 F-Frame and HMCP (F) Shunt Trip - Field Installation Kits (not UL listed for field installation); oem_spec
Description	Shunt trip field installation kit, right/neutral-pole mounting, 48-127 Vac or 48-60 Vdc, 18 AWG pigtail leads (terminal-block version SNT1RT08K). Not UL listed for field installation.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame and HMCP (F); not 4-pole	A	same as above
Voltage rating	48-127 Vac or 48-60 Vdc	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01318	SNT1RP12K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame shunt trip field kit, 208-380 Vac or 110-127 Vdc, right/neutral-pole, pigtail

OEM part number	SNT1RP12K	A	S184 p. 12-228, Table 12-422 F-Frame and HMCP (F) Shunt Trip - Field Installation Kits (not UL listed for field installation); oem_spec
Description	Shunt trip field installation kit, right/neutral-pole mounting, 208-380 Vac or 110-127 Vdc, 18 AWG pigtail leads (terminal-block version SNT1RT12K). Not UL listed for field installation.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame and HMCP (F); not 4-pole	A	same as above
Voltage rating	208-380 Vac or 110-127 Vdc	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01319	SNT1RP18K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame shunt trip field kit, 415-600 Vac or 220-250 Vdc, right/neutral-pole, pigtail

OEM part number	SNT1RP18K	A	S184 p. 12-228, Table 12-422 F-Frame and HMCP (F) Shunt Trip - Field Installation Kits (not UL listed for field installation); oem_spec
Description	Shunt trip field installation kit, right/neutral-pole mounting, 415-600 Vac or 220-250 Vdc, 18 AWG pigtail leads (terminal-block version SNT1RT18K). Not UL listed for field installation.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame and HMCP (F); not 4-pole	A	same as above
Voltage rating	415-600 Vac or 220-250 Vdc	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01320	UVH1LP08K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame undervoltage release field kit, 110-127 Vac, left pole

OEM part number	UVH1LP08K	A	S184 p. 12-236, Table 12-438 F-Frame Field Mounted Undervoltage Release Mechanism (not UL listed for field installation); oem_spec
Description	Undervoltage release mechanism field installation kit, pigtail leads, 110-127 Vac, left pole (terminal block version UVH1xT..K; HMCP version prefixed M).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame	A	same as above
Voltage rating	110-127 Vac	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01321	UVH1LP11K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame undervoltage release field kit, 208-240 Vac, left pole

OEM part number	UVH1LP11K	A	S184 p. 12-236, Table 12-438 F-Frame Field Mounted Undervoltage Release Mechanism (not UL listed for field installation); oem_spec
Description	Undervoltage release mechanism field installation kit, pigtail leads, 208-240 Vac, left pole (terminal block version UVH1xT..K; HMCP version prefixed M).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame	A	same as above
Voltage rating	208-240 Vac	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01322	UVH1LP15K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame undervoltage release field kit, 380-480 Vac, left pole

OEM part number	UVH1LP15K	A	S184 p. 12-236, Table 12-438 F-Frame Field Mounted Undervoltage Release Mechanism (not UL listed for field installation); oem_spec
Description	Undervoltage release mechanism field installation kit, pigtail leads, 380-480 Vac, left pole (terminal block version UVH1xT..K; HMCP version prefixed M).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame	A	same as above
Voltage rating	380-480 Vac	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01325	UVH1LP21K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame undervoltage release field kit, 24 Vdc, left pole

OEM part number	UVH1LP21K	A	S184 p. 12-236, Table 12-438 F-Frame Field Mounted Undervoltage Release Mechanism (not UL listed for field installation); oem_spec
Description	Undervoltage release mechanism field installation kit, pigtail leads, 24 Vdc, left pole (terminal block version UVH1xT..K; HMCP version prefixed M).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame	A	same as above
Voltage rating	24 Vdc	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01323	UVH1RP08K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame undervoltage release field kit, 110-127 Vac, right pole

OEM part number	UVH1RP08K	A	S184 p. 12-236, Table 12-438 F-Frame Field Mounted Undervoltage Release Mechanism (not UL listed for field installation); oem_spec
Description	Undervoltage release mechanism field installation kit, pigtail leads, 110-127 Vac, right pole (terminal block version UVH1xT..K; HMCP version prefixed M).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame	A	same as above
Voltage rating	110-127 Vac	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01324	UVH1RP11K	Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Eaton F-frame undervoltage release field kit, 208-240 Vac, right pole

OEM part number	UVH1RP11K	**A**	S184 p. 12-236, Table 12-438 F-Frame Field Mounted Undervoltage Release Mechanism (not UL listed for field installation); oem_spec
Description	Undervoltage release mechanism field installation kit, pigtail leads, 208-240 Vac, right pole (terminal block version UVH1xT..K; HMCP version prefixed M).	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series C F-frame	**A**	same as above
Voltage rating	208-240 Vac	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01293	**EFHB**	Eaton Series G Non-padlockable handle block, EG	Series G EG-frame **A**	unknown
EDH-EAT-01272	**LKD1**	Eaton non-padlockable handle block, F-frame	Series C F-frame **A**	unknown
EDH-EAT-01273	**LKD3**	Eaton non-padlockable handle block, J, K-frame	Series C J, K-frame **A**	unknown
EDH-EAT-01274	**LKD4**	Eaton non-padlockable handle block, L, M, N-frame	Series C L, M, N-frame **A**	unknown

EDH-EAT-01293	EFHB	Eaton	handle-lock	STATUS UNKNOWN

Eaton Series G Non-padlockable handle block, EG

OEM part number	EFHB	**A**	S184 p. 12-64, Table 12-117 External Accessories (Series G), all "Field" fit type; oem_spec
Description	Non-padlockable handle block, EG (field fit).	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series G EG-frame	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01272	LKD1	Cutler-Hammer	handle-lock	STATUS UNKNOWN

Eaton non-padlockable handle block, F-frame

OEM part number	LKD1	**A**	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices) Table 12-474; oem_spec
Description	Non-padlockable handle block: secures breaker handle in ON or OFF; positioned over handle and secured by setscrew; trip-free.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series C F-frame	**A**	same as above
OEM instruction document	Field installation only; listed per UL File E7819	**A**	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices); oem_spec
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01273	LKD3	Cutler-Hammer	handle-lock	STATUS UNKNOWN

Eaton non-padlockable handle block, J, K-frame

OEM part number	LKD3	**A**	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices) Table 12-474; oem_spec
Description	Non-padlockable handle block: secures breaker handle in ON or OFF; positioned over handle and secured by setscrew; trip-free.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series C J, K-frame	**A**	same as above
OEM instruction document	Field installation only; listed per UL File E7819	**A**	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices); oem_spec
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01274	LKD4	Cutler-Hammer	handle-lock	STATUS UNKNOWN

Eaton non-padlockable handle block, L, M, N-frame

OEM part number	LKD4	**A**	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices) Table 12-474; oem_spec
Description	Non-padlockable handle block: secures breaker handle in ON or OFF; positioned over handle and secured by setscrew; trip-free.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series C L, M, N-frame	**A**	same as above
OEM instruction document	Field installation only; listed per UL File E7819	**A**	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices); oem_spec
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC)		
Not yet documented	Dimensions, Material, Status		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01294	**EFPHB**	Eaton Series G Padlockable handle block, EG	Series G EG-frame **A**	unknown
EDH-EAT-01295	**EFPHBOFF**	Eaton Series G Padlockable handle block OFF-only, EG	Series G EG-frame **A**	unknown
EDH-EAT-01298	**EFPHL**	Eaton Series G Padlockable handle lock hasp, EG	Series G EG-frame **A**	unknown
EDH-EAT-01301	**EFPHLOFF**	Eaton Series G Padlockable handle lock hasp OFF-only, EG	Series G EG-frame **A**	unknown
EDH-EAT-01296	**FJPHBOFF**	Eaton Series G Padlockable handle block OFF-only, JG	Series G JG-frame **A**	unknown
EDH-EAT-01299	**FJPHL**	Eaton Series G Padlockable handle lock hasp, JG	Series G JG-frame **A**	unknown
EDH-EAT-01302	**FJPHLOFF**	Eaton Series G Padlockable handle lock hasp OFF-only, JG	Series G JG-frame **A**	unknown
EDH-EAT-01275	**GPHBOFF**	Eaton padlockable handle lock (handle block), G-frame	Series C G-frame **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01284	**HLK4**	Eaton padlockable handle lock hasp, L-frame side mounted / M-frame, lock ON or OFF	Series C L, M-frame **A**	unknown
EDH-EAT-01285	**HLK4LOFF**	Eaton padlockable handle lock hasp, L-/M-frame, lock OFF only	Series C L, M-frame **A**	unknown
EDH-EAT-01286	**HLK4S**	Eaton padlockable handle lock hasp, L-frame top mounted / M-frame vertical mounting, lock ON or OFF	Series C L, M-frame **A**	unknown
EDH-EAT-01287	**HLK4SOFF**	Eaton padlockable handle lock hasp, L-frame top mounted / M-frame vertical, lock OFF only	Series C L, M-frame **A**	unknown
EDH-EAT-01291	**HLK6**	Eaton padlockable handle lock hasp, R-frame lock ON/OFF	Series C R-frame **A**	unknown
EDH-EAT-01292	**HLK6OFF**	Eaton padlockable handle lock hasp, R-frame lock OFF only	Series C R-frame **A**	unknown
EDH-EAT-01297	**LBHPOFF**	Eaton Series G Padlockable handle block OFF-only, LG	Series G LG-frame **A**	unknown
EDH-EAT-01300	**LPHL**	Eaton Series G Padlockable handle lock hasp, LG	Series G LG-frame **A**	unknown
EDH-EAT-01303	**LPHLOFF**	Eaton Series G Padlockable handle lock hasp OFF-only, LG	Series G LG-frame **A**	unknown
EDH-EAT-01276	**PHB3**	Eaton padlockable handle lock (handle block), J, K-frame	Series C J, K-frame **A**	unknown
EDH-EAT-01277	**PHL1**	Eaton padlockable handle lock hasp, F-frame 1-pole breakers	Series C F-frame **A**	unknown
EDH-EAT-01278	**PLK1**	Eaton padlockable handle lock hasp, F-frame 2-, 3-, 4-pole breakers	Series C F-frame **A**	unknown
EDH-EAT-01279	**PLK1LOFF**	Eaton padlockable handle lock hasp, F-frame, left side mounting, OFF only	Series C F-frame **A**	unknown
EDH-EAT-01280	**PLK1ROFF**	Eaton padlockable handle lock hasp, F-frame, right side mounting, OFF only	Series C F-frame **A**	unknown
EDH-EAT-01281	**PLK3**	Eaton padlockable handle lock hasp, J-, K-frame 2-, 3-, 4-pole	Series C J, K-frame **A**	unknown
EDH-EAT-01282	**PLK3LOFF**	Eaton padlockable handle lock hasp, J-, K-frame left side mounting, OFF only	Series C J, K-frame **A**	unknown
EDH-EAT-01283	**PLK3ROFF**	Eaton padlockable handle lock hasp, J-, K-frame right side mounting, OFF only	Series C J, K-frame **A**	unknown
EDH-EAT-01288	**PLK5**	Eaton padlockable handle lock hasp, N-frame side mounted	Series C N-frame **A**	unknown
EDH-EAT-01304	**PLK55OFF**	Eaton Series G Padlockable handle lock hasp OFF-only, NG	Series G NG-frame **A**	unknown
EDH-EAT-01289	**PLK5S**	Eaton padlockable handle lock hasp, N-frame top mounted	Series C N-frame **A**	unknown
EDH-EAT-01290	**PLK5SOFF**	Eaton padlockable handle lock hasp, N-frame top mounted	Series C N-frame **A**	unknown

EDH-EAT-01294	**EFPHB**	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Series G Padlockable handle block, EG

OEM part number	EFPHB	**A**	S184 p. 12-64, Table 12-117 External Accessories (Series G), all "Field" fit type; oem_spec
Description	Padlockable handle block, EG (field fit).	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series G EG-frame	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01295	EFPHBOFF	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Series G Padlockable handle block OFF-only, EG

OEM part number	EFPHBOFF	A	S184 p. 12-64, Table 12-117 External Accessories (Series G), all "Field" fit type; oem_spec
Description	Padlockable handle block OFF-only, EG (field fit).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series G EG-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01298	EFPHL	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Series G Padlockable handle lock hasp, EG

OEM part number	EFPHL	A	S184 p. 12-64, Table 12-117 External Accessories (Series G), all "Field" fit type; oem_spec
Description	Padlockable handle lock hasp, EG (field fit).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series G EG-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01301	EFPHLOFF	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Series G Padlockable handle lock hasp OFF-only, EG

OEM part number	EFPHLOFF	A	S184 p. 12-64, Table 12-117 External Accessories (Series G), all "Field" fit type; oem_spec
Description	Padlockable handle lock hasp OFF-only, EG (field fit).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series G EG-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01296	FJPHBOFF	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Series G Padlockable handle block OFF-only, JG

OEM part number	FJPHBOFF	A	S184 p. 12-64, Table 12-117 External Accessories (Series G), all "Field" fit type; oem_spec
Description	Padlockable handle block OFF-only, JG (field fit).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series G JG-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01299	FJPHL	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Series G Padlockable handle lock hasp, JG

OEM part number	FJPHL	A	S184 p. 12-64, Table 12-117 External Accessories (Series G), all "Field" fit type; oem_spec
Description	Padlockable handle lock hasp, JG (field fit).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series G JG-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01302	FJPHLOFF	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Series G Padlockable handle lock hasp OFF-only, JG

OEM part number	FJPHLOFF	A	S184 p. 12-64, Table 12-117 External Accessories (Series G), all "Field" fit type; oem_spec
Description	Padlockable handle lock hasp OFF-only, JG (field fit).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series G JG-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01275	GPHBOFF	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock (handle block), G-frame

OEM part number	GPHBOFF	A	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices) Table 12-476; oem_spec
Description	Padlockable handle lock positioned in the cover opening to prevent handle movement; accommodates one 5/16 in (8 mm) padlock.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C G-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C G-Frame (GD/GHC/GHB), GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01284	HLK4	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, L-frame side mounted / M-frame, lock ON or OFF

OEM part number	HLK4	A	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: L-frame side mounted / M-frame, lock ON or OFF.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C L, M-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01285	HLK4LOFF	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, L-/M-frame, lock OFF only

OEM part number	HLK4LOFF	**A**	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: L-/M-frame, lock OFF only (left-hand mount).	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series C L, M-frame	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01286	HLK4S	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, L-frame top mounted / M-frame vertical mounting, lock ON or OFF

OEM part number	HLK4S	**A**	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: L-frame top mounted / M-frame vertical mounting, lock ON or OFF.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series C L, M-frame	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01287	HLK4SOFF	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, L-frame top mounted / M-frame vertical, lock OFF only

OEM part number	HLK4SOFF	**A**	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: L-frame top mounted / M-frame vertical, lock OFF only.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series C L, M-frame	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01291	HLK6	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, R-frame lock ON/OFF

OEM part number	HLK6	**A**	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: R-frame lock ON/OFF.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Series C R-frame	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01292	HLK6OFF	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, R-frame lock OFF only

OEM part number	HLK6OFF	A	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: R-frame lock OFF only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C R-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01297	LBHPOFF	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Series G Padlockable handle block OFF-only, LG

OEM part number	LBHPOFF	A	S184 p. 12-64, Table 12-117 External Accessories (Series G), all "Field" fit type; oem_spec
Description	Padlockable handle block OFF-only, LG (field fit).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series G LG-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01300	LPHL	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Series G Padlockable handle lock hasp, LG

OEM part number	LPHL	A	S184 p. 12-64, Table 12-117 External Accessories (Series G), all "Field" fit type; oem_spec
Description	Padlockable handle lock hasp, LG (field fit).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series G LG-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01303	LPHLOFF	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Series G Padlockable handle lock hasp OFF-only, LG

OEM part number	LPHLOFF	A	S184 p. 12-64, Table 12-117 External Accessories (Series G), all "Field" fit type; oem_spec
Description	Padlockable handle lock hasp OFF-only, LG (field fit).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series G LG-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01276	PHB3	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock (handle block), J, K-frame

OEM part number	PHB3	A	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices) Table 12-476; oem_spec
Description	Padlockable handle lock positioned in the cover opening to prevent handle movement; accommodates one 5/16 in (8 mm) padlock.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C J, K-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01277	PHL1	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, F-frame 1-pole breakers

OEM part number	PHL1	A	S184 p. 12-251, Tables 12-473..12-477 (Series C External Accessories, Handle Locking and Blocking Devices); p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: F-frame 1-pole breakers (also Snap-on Padlockable Handle Lock Hasp, Table 12-477: snaps onto escutcheon with optional retaining screw, one padlock 1/4 in shackle; designed for 1-pole but usable on 1-4 pole).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01278	PLK1	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, F-frame 2-, 3-, 4-pole breakers

OEM part number	PLK1	A	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: F-frame 2-, 3-, 4-pole breakers.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01279	PLK1LOFF	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, F-frame, left side mounting, OFF only

OEM part number	PLK1LOFF	A	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: F-frame, left side mounting, OFF only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01280	PLK1ROFF	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, F-frame, right side mounting, OFF only

OEM part number	PLK1ROFF	A	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: F-frame, right side mounting, OFF only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C F-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01281	PLK3	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, J-, K-frame 2-, 3-, 4-pole

OEM part number	PLK3	A	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: J-, K-frame 2-, 3-, 4-pole.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C J, K-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01282	PLK3LOFF	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, J-, K-frame left side mounting, OFF only

OEM part number	PLK3LOFF	A	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: J-, K-frame left side mounting, OFF only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C J, K-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01283	PLK3ROFF	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, J-, K-frame right side mounting, OFF only

OEM part number	PLK3ROFF	A	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: J-, K-frame right side mounting, OFF only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C J, K-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01288	PLK5	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, N-frame side mounted

OEM part number	PLK5	A	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: N-frame side mounted (also Series G NG padlockable hasp per Table 12-117).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C N-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Series G NG-Frame		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01304	PLK55OFF	Eaton	padlock-attachment	STATUS UNKNOWN

Eaton Series G Padlockable handle lock hasp OFF-only, NG

OEM part number	PLK55OFF	A	S184 p. 12-64, Table 12-117 External Accessories (Series G), all "Field" fit type; oem_spec
Description	Padlockable handle lock hasp OFF-only, NG (field fit).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series G NG-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series G NG-Frame		
Not yet documented	Dimensions, Material, Status		
Open question	*Table 12-117 lists LKD4 as NG non-padlockable handle block and HLK6/HLK6OFF for RG.*		

EDH-EAT-01289	PLK5S	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, N-frame top mounted

OEM part number	PLK5S	A	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: N-frame top mounted (ON/OFF).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C N-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC)		
Not yet documented	Dimensions, Material, Status		

EDH-EAT-01290	PLK5SOFF	Cutler-Hammer	padlock-attachment	STATUS UNKNOWN

Eaton padlockable handle lock hasp, N-frame top mounted

OEM part number	PLK5SOFF	A	S184 p. 12-252, Table 12-478 Padlockable Handle Lock Hasp; oem_spec
Description	Padlockable handle lock hasp: mounts on breaker cover within trimline (cover predrilled both sides of handle); accommodates up to three padlocks with 1/4 in shackles; trip-free; listed UL E7819, field installation only. Application: N-frame top mounted (OFF only).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Series C N-frame	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRL4 · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC)		
Not yet documented	Dimensions, Material, Status		

3.27 PRL3E — Pow-R-Line 3E

FAM-EAT-004 · panelboard · aka PRL3e, Pow-R-Line 3E · markings: Cutler-Hammer, Eaton

Compact distribution panelboard variant built around Eaton EG-frame (Series G E-frame) bolt-on branch breakers up to 125 A. Not covered by the renewal-parts guides found; no PRL3E connector kits identified.

Attribute	Value	Cl.	Sources
Status	Current in June 2020 catalog	A	S6 p.V2-T3-2; oem_spec
Era of manufacture	Shown in January 2018 and June 2020 catalogs	A	S6, S7 oem_spec
Voltage rating	240, 480Y/277 or 480 Vac; 250 Vdc	A	S6, S7 s6 p.V2-T3-11; oem_spec
Main ampacity	MLO 100, 250, 400, 600 A; main breakers 100-600 A	A	S7 p.22.3-5; oem_spec
Branch breakers accepted	EGB/EGS/EGH (E-frame) 15-125 A, 1-3 pole; mains EG (horizontal), EDB/EDS/ED/EDH/EDC, FD/HFD/FDC, DK/KD/HKD/KDC, LHH, LGE/LGH	A	S7 p.22.3-5 Tables 22.3-8, 22.3-9; oem_spec

Breaker families associated: Series G E-frame (EGB/EGS/EGH)
Key documents: S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/
Also fits this family (entry printed elsewhere): SPDkkkVVVVfA, SPD050230L2A, SPD120230L3A, SPD160480Y3A, SPD200480Y3A, SPD100480Y2A, SPD050208Y2A, SPD100208Y2A, SPD120480Y2C

3.28 PRL3FQS — Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)

FAM-EAT-031 · panelboard · aka 3FQS, Pow-R-Line 3FQS, Quik-Spec Coordination Panelboard, QSCP

Fusible branch panelboard using Bussmann CCPB (Compact Circuit Protector Base) ampacity-rejecting branch disconnects with CUBEFuse (TCF) fuses, 30-400 A mains (lugs, non-fused or Class J fused main disconnect). Bussmann-heritage product sold under the Eaton Pow-R-Line name.

Attribute	Value	Cl.	Sources
Torque label	Agency label 3A1064 (E3A1064) on panelboard carries wire sizes and fastener torque values; chassis to enclosure four 1/4-20 hex flange nuts 35 lb-in (2.8 N-m); CCPB bus tab #10-32 x 1/4 in screw 25 lb-in (2.82 N-m)	A	S248 pp. 5-7, 10; oem_spec

Key documents: S248 E3A1071 RevG Pow-R-Line 3FQS Fusible Panelboard Instruction Leaflet E3A1071 RevG (December 2010)

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00810	**2A1909-19**	3FQS kit, main disconnect 30-60A 1-phase, 2 wire	—	unknown
EDH-EAT-00820	**2A1909-29**	3FQS kit, main disconnect 225-400A	—	unknown
EDH-EAT-00795	**2A1909-4**	3FQS kit, main disconnect 70-200A	—	unknown
EDH-EAT-00799	**2A1909-8**	3FQS kit, main disconnect 30-60A 1-phase, 3 wire	—	unknown
EDH-EAT-00800	**2A1909-9**	3FQS kit, main disconnect 30-60A 3-phase	—	unknown

EDH-EAT-00810	2A1909-19	Eaton lineage	main-breaker-kit	STATUS UNKNOWN

3FQS kit, main disconnect 30-60A 1-phase, 2 wire

OEM part number	2A1909-19	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, main disconnect 30-60A 1-phase, 2 wire	A	same as above
Application	main disconnect	A	same as above
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	same as above
Current rating	30-60A	A	same as above
Wire range	18-10 AWG single/dual, 8-6 AWG single/dual, 4 AWG single; use only 75 C conductors	A	S248 p. 10, Main Disconnects; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00820	2A1909-29	Eaton lineage	main-breaker-kit	STATUS UNKNOWN

3FQS kit, main disconnect 225-400A

OEM part number	2A1909-29	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, main disconnect 225-400A	A	same as above
Application	main disconnect	A	same as above
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	same as above
Current rating	225-400A	A	same as above
Wire range	600 kcmil-2 AWG; use only 75 C conductors	A	S248 p. 10, Main Disconnects; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00795	2A1909-4	Eaton lineage	main-breaker-kit	STATUS UNKNOWN

3FQS kit, main disconnect 70-200A

OEM part number	2A1909-4	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, main disconnect 70-200A	A	same as above
Application	main disconnect	A	same as above
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	same as above
Current rating	70-200A	A	same as above
Wire range	300 kcmil-4 AWG; use only 75 C conductors	A	S248 p. 10, Main Disconnects; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00799	2A1909-8	Eaton lineage	main-breaker-kit	STATUS UNKNOWN

3FQS kit, main disconnect 30-60A 1-phase, 3 wire

OEM part number	2A1909-8	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, main disconnect 30-60A 1-phase, 3 wire	A	same as above
Application	main disconnect	A	same as above
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	same as above
Current rating	30-60A	A	same as above
Wire range	18-10 AWG single/dual, 8-6 AWG single/dual, 4 AWG single; use only 75 C conductors	A	S248 p. 10, Main Disconnects; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00800	2A1909-9	Eaton lineage	main-breaker-kit	STATUS UNKNOWN

3FQS kit, main disconnect 30-60A 3-phase

OEM part number	2A1909-9	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, main disconnect 30-60A 3-phase	A	same as above
Application	main disconnect	A	same as above
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	same as above
Current rating	30-60A	A	same as above
Wire range	18-10 AWG single/dual, 8-6 AWG single/dual, 4 AWG single; use only 75 C conductors	A	S248 p. 10, Main Disconnects; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00792	**2A1909-1**	3FQS kit, compression lug 3-phase, 70-200A	—	unknown
EDH-EAT-00801	**2A1909-10**	3FQS kit, compression lug 3-phase, 30-60A	—	unknown
EDH-EAT-00802	**2A1909-11**	3FQS kit, mechanical lug 3-phase, 30-60A	—	unknown
EDH-EAT-00803	**2A1909-12**	3FQS kit, compression lug 1-phase, 3 wire, 30-60A	—	unknown
EDH-EAT-00804	**2A1909-13**	3FQS kit, mechanical lug 1-phase, 3 wire, 30-60A	—	unknown
EDH-EAT-00805	**2A1909-14**	3FQS kit, compression lug 1-phase, 2 wire, 70-200A	—	unknown
EDH-EAT-00806	**2A1909-15**	3FQS kit, mechanical lug 1-phase, 2 wire, 70-200A	—	unknown
EDH-EAT-00808	**2A1909-17**	3FQS kit, compression lug 1-phase, 2 wire, 30-60A	—	unknown
EDH-EAT-00809	**2A1909-18**	3FQS kit, mechanical lug 1-phase, 2 wire, 30-60A	—	unknown
EDH-EAT-00793	**2A1909-2**	3FQS kit, mechanical lug 3-phase, 70-200A	—	unknown
EDH-EAT-00811	**2A1909-20**	3FQS kit, compression lug 3-phase, 225-400A	—	unknown
EDH-EAT-00812	**2A1909-21**	3FQS kit, mechanical lug 3-phase, 225-400A	—	unknown
EDH-EAT-00814	**2A1909-23**	3FQS kit, compression lug 1-phase, 3 wire, 225-400A	—	unknown
EDH-EAT-00815	**2A1909-24**	3FQS kit, mechanical lug 1-phase, 3 wire, 225-400A	—	unknown
EDH-EAT-00817	**2A1909-26**	3FQS kit, compression lug 1-phase, 2 wire, 225-400A	—	unknown
EDH-EAT-00818	**2A1909-27**	3FQS kit, mechanical lug 1-phase, 2 wire, 225-400A	—	unknown
EDH-EAT-00796	**2A1909-5**	3FQS kit, compression lug 1-phase, 3 wire, 70-200A	—	unknown
EDH-EAT-00797	**2A1909-6**	3FQS kit, mechanical lug 1-phase, 3 wire, 70-200A	—	unknown

EDH-EAT-00792	2A1909-1	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 3-phase, 70-200A

OEM part number	2A1909-1	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 3-phase, 70-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	70-200A	A	same as above
Wire range	300 kcmil-4 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00801	2A1909-10	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 3-phase, 30-60A

OEM part number	2A1909-10	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 3-phase, 30-60A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-60A	A	same as above
Wire range	8 AWG-1/0, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00802	2A1909-11	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 3-phase, 30-60A

OEM part number	2A1909-11	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 3-phase, 30-60A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-60A	A	same as above
Wire range	2-14 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00803	2A1909-12	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 1-phase, 3 wire, 30-60A

OEM part number	2A1909-12	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 1-phase, 3 wire, 30-60A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-60A	A	same as above
Wire range	8 AWG-1/0, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00804	2A1909-13	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 1-phase, 3 wire, 30-60A

OEM part number	2A1909-13	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 1-phase, 3 wire, 30-60A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-60A	A	same as above
Wire range	2-14 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00805	2A1909-14	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 1-phase, 2 wire, 70-200A

OEM part number	2A1909-14	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 1-phase, 2 wire, 70-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	70-200A	A	same as above
Wire range	300 kcmil-4 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00806	2A1909-15	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 1-phase, 2 wire, 70-200A

OEM part number	2A1909-15	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 1-phase, 2 wire, 70-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	70-200A	A	same as above
Wire range	300 kcmil-6 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00808	2A1909-17	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 1-phase, 2 wire, 30-60A

OEM part number	2A1909-17	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 1-phase, 2 wire, 30-60A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-60A	A	same as above
Wire range	8 AWG-1/0, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00809	2A1909-18	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 1-phase, 2 wire, 30-60A

OEM part number	2A1909-18	**A**	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 1-phase, 2 wire, 30-60A	**A**	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	**A**	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	**A**	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-60A	**A**	same as above
Wire range	2-14 AWG, 60/75 C Cu-Al conductors	**A**	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00793	2A1909-2	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 3-phase, 70-200A

OEM part number	2A1909-2	**A**	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 3-phase, 70-200A	**A**	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	**A**	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	**A**	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	70-200A	**A**	same as above
Wire range	300 kcmil-6 AWG, 60/75 C Cu-Al conductors	**A**	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00811	2A1909-20	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 3-phase, 225-400A

OEM part number	2A1909-20	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 3-phase, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-250 kcmil, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00812	2A1909-21	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 3-phase, 225-400A

OEM part number	2A1909-21	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 3-phase, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-4 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00814	2A1909-23	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 1-phase, 3 wire, 225-400A

OEM part number	2A1909-23	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 1-phase, 3 wire, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-250 kcmil, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00815	2A1909-24	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 1-phase, 3 wire, 225-400A

OEM part number	2A1909-24	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 1-phase, 3 wire, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-4 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00817	2A1909-26	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 1-phase, 2 wire, 225-400A

OEM part number	2A1909-26	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 1-phase, 2 wire, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-250 kcmil, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00818	2A1909-27	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 1-phase, 2 wire, 225-400A

OEM part number	2A1909-27	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 1-phase, 2 wire, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-4 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00796	2A1909-5	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 1-phase, 3 wire, 70-200A

OEM part number	2A1909-5	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 1-phase, 3 wire, 70-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	70-200A	A	same as above
Wire range	300 kcmil-4 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00797	2A1909-6	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 1-phase, 3 wire, 70-200A

OEM part number	2A1909-6	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 1-phase, 3 wire, 70-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	70-200A	A	same as above
Wire range	300 kcmil-6 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00807	**2A1909-16**	3FQS kit, double/sub-feed lug 1-phase, 2 wire, 30-200A	—	unknown
EDH-EAT-00813	**2A1909-22**	3FQS kit, double/sub-feed lug 3-phase, 225-400A	—	unknown
EDH-EAT-00816	**2A1909-25**	3FQS kit, double/sub-feed lug 1-phase, 3 wire, 225-400A	—	unknown
EDH-EAT-00819	**2A1909-28**	3FQS kit, double/sub-feed lug 1-phase, 2 wire, 225-400A	—	unknown
EDH-EAT-00794	**2A1909-3**	3FQS kit, double/sub-feed lug 3-phase, 30-200A	—	unknown
EDH-EAT-00798	**2A1909-7**	3FQS kit, double/sub-feed lug 1-phase, 3 wire, 30-200A	—	unknown

EDH-EAT-00807	2A1909-16	Eaton lineage	sub-feed-lug-kit	STATUS UNKNOWN

3FQS kit, double/sub-feed lug 1-phase, 2 wire, 30-200A

OEM part number	2A1909-16	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, double/sub-feed lug 1-phase, 2 wire, 30-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-200A	A	same as above
Wire range	300 kcmil-6 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00813	2A1909-22	Eaton lineage	sub-feed-lug-kit	STATUS UNKNOWN

3FQS kit, double/sub-feed lug 3-phase, 225-400A

OEM part number	2A1909-22	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, double/sub-feed lug 3-phase, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-2 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00816	2A1909-25	Eaton lineage	sub-feed-lug-kit	STATUS UNKNOWN

3FQS kit, double/sub-feed lug 1-phase, 3 wire, 225-400A

OEM part number	2A1909-25	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, double/sub-feed lug 1-phase, 3 wire, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-2 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00819	2A1909-28	Eaton lineage	sub-feed-lug-kit	STATUS UNKNOWN

3FQS kit, double/sub-feed lug 1-phase, 2 wire, 225-400A

OEM part number	2A1909-28	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, double/sub-feed lug 1-phase, 2 wire, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-2 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00794	2A1909-3	Eaton lineage	sub-feed-lug-kit	STATUS UNKNOWN

3FQS kit, double/sub-feed lug 3-phase, 30-200A

OEM part number	2A1909-3	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, double/sub-feed lug 3-phase, 30-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-200A	A	same as above
Wire range	300 kcmil-6 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00798	2A1909-7	Eaton lineage	sub-feed-lug-kit	STATUS UNKNOWN

3FQS kit, double/sub-feed lug 1-phase, 3 wire, 30-200A

OEM part number	2A1909-7	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, double/sub-feed lug 1-phase, 3 wire, 30-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S248 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S248 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-200A	A	same as above
Wire range	300 kcmil-6 AWG, 60/75 C Cu-Al conductors	A	S248 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00823	**2A1908-1**	3FQS Neutral bar kit, 200A unbonded	—	unknown
EDH-EAT-00824	**2A1908-2**	3FQS Neutral bar kit, 400A unbonded	—	unknown
EDH-EAT-00825	**2A1908-3**	3FQS Neutral bar kit, 200A bonded	—	unknown
EDH-EAT-00826	**2A1908-4**	3FQS Neutral bar kit, 400A bonded	—	unknown
EDH-EAT-00827	**2A1908-5**	3FQS Neutral bar kit, 800A unbonded	—	unknown
EDH-EAT-00828	**2A1908-6**	3FQS Neutral bar kit, 800A bonded	—	unknown

EDH-EAT-00823	2A1908-1	Eaton lineage	neutral-assembly	STATUS UNKNOWN

3FQS Neutral bar kit, 200A unbonded

OEM part number	2A1908-1	A	S248 pp. 12-13, Coordination panelboard replacement parts, D - Neutral Bars; oem_spec
Description	Neutral bar kit, 200A unbonded	A	same as above
OEM instruction document	Install Neutral Bar with supplied #10-32 x 1/2 in long screws (NEMA 1: either side; NEMA 3R: left side). Service entrance: bonding wire between neutral bar stud (1/4-20 hex flange nut) and enclosure (#10-32 x 1/4 in screw). Drawings show 200A, 400A and 800A neutral bar styles.	A	S248 pp. 5-6; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00824	2A1908-2	Eaton lineage	neutral-assembly	STATUS UNKNOWN

3FQS Neutral bar kit, 400A unbonded

OEM part number	2A1908-2	A	S248 pp. 12-13, Coordination panelboard replacement parts, D - Neutral Bars; oem_spec
Description	Neutral bar kit, 400A unbonded	A	same as above
OEM instruction document	Install Neutral Bar with supplied #10-32 x 1/2 in long screws (NEMA 1: either side; NEMA 3R: left side). Service entrance: bonding wire between neutral bar stud (1/4-20 hex flange nut) and enclosure (#10-32 x 1/4 in screw). Drawings show 200A, 400A and 800A neutral bar styles.	A	S248 pp. 5-6; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00825	2A1908-3	Eaton lineage	neutral-assembly	STATUS UNKNOWN

3FQS Neutral bar kit, 200A bonded

OEM part number	2A1908-3	A	S248 pp. 12-13, Coordination panelboard replacement parts, D - Neutral Bars; oem_spec
Description	Neutral bar kit, 200A bonded	A	same as above
OEM instruction document	Install Neutral Bar with supplied #10-32 x 1/2 in long screws (NEMA 1: either side; NEMA 3R: left side). Service entrance: bonding wire between neutral bar stud (1/4-20 hex flange nut) and enclosure (#10-32 x 1/4 in screw). Drawings show 200A, 400A and 800A neutral bar styles.	A	S248 pp. 5-6; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00826	2A1908-4	Eaton lineage	neutral-assembly	STATUS UNKNOWN

3FQS Neutral bar kit, 400A bonded

OEM part number	2A1908-4	A	S248 pp. 12-13, Coordination panelboard replacement parts, D - Neutral Bars; oem_spec
Description	Neutral bar kit, 400A bonded	A	same as above
OEM instruction document	Install Neutral Bar with supplied #10-32 x 1/2 in long screws (NEMA 1: either side; NEMA 3R: left side). Service entrance: bonding wire between neutral bar stud (1/4-20 hex flange nut) and enclosure (#10-32 x 1/4 in screw). Drawings show 200A, 400A and 800A neutral bar styles.	A	S248 pp. 5-6; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00827	2A1908-5	Eaton lineage	neutral-assembly	STATUS UNKNOWN

3FQS Neutral bar kit, 800A unbonded

OEM part number	2A1908-5	A	S248 pp. 12-13, Coordination panelboard replacement parts, D - Neutral Bars; oem_spec
Description	Neutral bar kit, 800A unbonded	A	same as above
OEM instruction document	Install Neutral Bar with supplied #10-32 x 1/2 in long screws (NEMA 1: either side; NEMA 3R: left side). Service entrance: bonding wire between neutral bar stud (1/4-20 hex flange nut) and enclosure (#10-32 x 1/4 in screw). Drawings show 200A, 400A and 800A neutral bar styles.	A	S248 pp. 5-6; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00828	2A1908-6	Eaton lineage	neutral-assembly	STATUS UNKNOWN

3FQS Neutral bar kit, 800A bonded

OEM part number	2A1908-6	A	S248 pp. 12-13, Coordination panelboard replacement parts, D - Neutral Bars; oem_spec
Description	Neutral bar kit, 800A bonded	A	same as above
OEM instruction document	Install Neutral Bar with supplied #10-32 x 1/2 in long screws (NEMA 1: either side; NEMA 3R: left side). Service entrance: bonding wire between neutral bar stud (1/4-20 hex flange nut) and enclosure (#10-32 x 1/4 in screw). Drawings show 200A, 400A and 800A neutral bar styles.	A	S248 pp. 5-6; oem_spec
Cross-links	Families: PRL3FQS		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00821	**2A1907-1**	3FQS Ground bar kit, non-isolated	—	unknown
EDH-EAT-00822	**2A1907-2**	3FQS Ground bar kit, isolated	—	unknown

EDH-EAT-00821	2A1907-1	Eaton lineage	ground-bar	STATUS UNKNOWN

3FQS Ground bar kit, non-isolated

OEM part number	2A1907-1	A	S248 pp. 12-13, Coordination panelboard replacement parts, C - Ground Bars; oem_spec
Description	Ground bar kit, non-isolated	A	same as above
OEM instruction document	Install Grounding Bar with supplied #10-32 x 1/2 in long screws (NEMA 3R: right side)	A	S248 p. 5; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00822	2A1907-2	Eaton lineage	ground-bar	STATUS UNKNOWN

3FQS Ground bar kit, isolated

OEM part number	2A1907-2	A	S248 pp. 12-13, Coordination panelboard replacement parts, C - Ground Bars; oem_spec
Description	Ground bar kit, isolated	A	same as above
OEM instruction document	Install Grounding Bar with supplied #10-32 x 1/2 in long screws (NEMA 3R: right side)	A	S248 p. 5; oem_spec
Cross-links	Families: PRL3FQS		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00839	**2A1906-1**	3FQS Branch deadfront kit, single KO, 18 positions	—	unknown
EDH-EAT-00840	**2A1906-2**	3FQS Branch deadfront kit, single KO, 30 positions	—	unknown
EDH-EAT-00841	**2A1906-3**	3FQS Branch deadfront kit, single KO, 42 positions	—	unknown
EDH-EAT-00842	**2A1960-1**	3FQS Branch deadfront kit, double KO, 18 positions	—	unknown
EDH-EAT-00843	**2A1960-2**	3FQS Branch deadfront kit, double KO, 30 positions	—	unknown
EDH-EAT-00844	**2A1960-3**	3FQS Branch deadfront kit, double KO, 42 positions	—	unknown

EDH-EAT-00839	2A1906-1	Eaton lineage	deadfront	STATUS UNKNOWN

3FQS Branch deadfront kit, single KO, 18 positions

OEM part number	2A1906-1	A	S248 pp. 12-13, Coordination panelboard replacement parts, G - Dead Fronts; oem_spec
Description	Branch deadfront kit, single KO, 18 positions	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00840	2A1906-2	Eaton lineage	deadfront	STATUS UNKNOWN

3FQS Branch deadfront kit, single KO, 30 positions

OEM part number	2A1906-2	A	S248 pp. 12-13, Coordination panelboard replacement parts, G - Dead Fronts; oem_spec
Description	Branch deadfront kit, single KO, 30 positions	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00841	2A1906-3	Eaton lineage	deadfront	STATUS UNKNOWN

3FQS Branch deadfront kit, single KO, 42 positions

OEM part number	2A1906-3	A	S248 pp. 12-13, Coordination panelboard replacement parts, G - Dead Fronts; oem_spec
Description	Branch deadfront kit, single KO, 42 positions	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00842	2A1960-1	Eaton lineage	deadfront	STATUS UNKNOWN

3FQS Branch deadfront kit, double KO, 18 positions

OEM part number	2A1960-1	A	S248 pp. 12-13, Coordination panelboard replacement parts, G - Dead Fronts; oem_spec
Description	Branch deadfront kit, double KO, 18 positions	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00843	2A1960-2	Eaton lineage	deadfront	STATUS UNKNOWN

3FQS Branch deadfront kit, double KO, 30 positions

OEM part number	2A1960-2	A	S248 pp. 12-13, Coordination panelboard replacement parts, G - Dead Fronts; oem_spec
Description	Branch deadfront kit, double KO, 30 positions	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00844	2A1960-3	Eaton lineage	deadfront	STATUS UNKNOWN

3FQS Branch deadfront kit, double KO, 42 positions

OEM part number	2A1960-3	A	S248 pp. 12-13, Coordination panelboard replacement parts, G - Dead Fronts; oem_spec
Description	Branch deadfront kit, double KO, 42 positions	A	same as above
Cross-links	Families: PRL3FQS		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00858	**2A1918-1**	3FQS Kit, branch knockout covers, <=60A	—	unknown
EDH-EAT-00859	**2A1918-2**	3FQS Kit, branch knockout covers, 70A-100A	—	unknown

EDH-EAT-00858	2A1918-1	Eaton lineage	filler-plate	STATUS UNKNOWN

3FQS Kit, branch knockout covers, <=60A

OEM part number	2A1918-1	A	S248 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, branch knockout covers, <=60A	A	same as above
Application	Covers unused/open branch circuit positions in branch deadfront	A	S248 p. 8; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00859	2A1918-2	Eaton lineage	filler-plate	STATUS UNKNOWN

3FQS Kit, branch knockout covers, 70A-100A

OEM part number	2A1918-2	A	S248 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, branch knockout covers, 70A-100A	A	same as above
Application	Covers unused/open branch circuit positions in branch deadfront	A	S248 p. 8; oem_spec
Cross-links	Families: PRL3FQS		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00862	**E2A1667-1**	3FQS enclosure Door, surface for 50 in box (200 A)	—	unknown
EDH-EAT-00871	**E2A1667-10**	3FQS enclosure Door, flush for 69 in box (400 A)	—	unknown
EDH-EAT-00872	**E2A1667-11**	3FQS enclosure Door-in-door, surface for 69 in box (400 A)	—	unknown
EDH-EAT-00873	**E2A1667-12**	3FQS enclosure Door-in-door, flush for 69 in box (400 A)	—	unknown
EDH-EAT-00874	**E2A1667-13**	3FQS enclosure Door, surface for 33 in box (200 A)	—	unknown
EDH-EAT-00875	**E2A1667-14**	3FQS enclosure Door, flush for 33 in box (200 A)	—	unknown
EDH-EAT-00876	**E2A1667-15**	3FQS enclosure Door-in-door, surface for 33 in box (200 A)	—	unknown
EDH-EAT-00877	**E2A1667-16**	3FQS enclosure Door-in-door, flush for 33 in box (200 A)	—	unknown
EDH-EAT-00878	**E2A1667-17**	3FQS enclosure Door, surface for 50 in box (400 A)	—	unknown
EDH-EAT-00879	**E2A1667-18**	3FQS enclosure Door, flush for 50 in box (400 A)	—	unknown
EDH-EAT-00880	**E2A1667-19**	3FQS enclosure Door-in-door, surface for 50 in box (400 A)	—	unknown
EDH-EAT-00863	**E2A1667-2**	3FQS enclosure Door, surface for 59 in box (200 A)	—	unknown
EDH-EAT-00881	**E2A1667-20**	3FQS enclosure Door-in-door, flush for 50 in box (400 A)	—	unknown
EDH-EAT-00882	**E2A1667-21**	3FQS enclosure Door, surface for 59 in box (400 A)	—	unknown
EDH-EAT-00883	**E2A1667-22**	3FQS enclosure Door, flush for 59 in box (400 A)	—	unknown
EDH-EAT-00884	**E2A1667-23**	3FQS enclosure Door-in-door, surface for 59 in box (400 A)	—	unknown
EDH-EAT-00885	**E2A1667-24**	3FQS enclosure Door-in-door, flush for 59 in box (400 A)	—	unknown
EDH-EAT-00864	**E2A1667-3**	3FQS enclosure Door, flush for 50 in box (200 A)	—	unknown
EDH-EAT-00865	**E2A1667-4**	3FQS enclosure Door, flush for 59 in box (200 A)	—	unknown
EDH-EAT-00866	**E2A1667-5**	3FQS enclosure Door-in-door, surface for 50 in box (200 A)	—	unknown
EDH-EAT-00867	**E2A1667-6**	3FQS enclosure Door-in-door, surface for 59 in box (200 A)	—	unknown
EDH-EAT-00868	**E2A1667-7**	3FQS enclosure Door-in-door, flush for 50 in box (200 A)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00869	**E2A1667-8**	3FQS enclosure Door-in-door, flush for 59 in box (200 A)	—	unknown
EDH-EAT-00870	**E2A1667-9**	3FQS enclosure Door, surface for 69 in box (400 A)	—	unknown

EDH-EAT-00862 **E2A1667-1** Eaton lineage trim **STATUS UNKNOWN**

3FQS enclosure Door, surface for 50 in box (200 A)

OEM part number	E2A1667-1	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, surface for 50 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00871 **E2A1667-10** Eaton lineage trim **STATUS UNKNOWN**

3FQS enclosure Door, flush for 69 in box (400 A)

OEM part number	E2A1667-10	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, flush for 69 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00872 **E2A1667-11** Eaton lineage trim **STATUS UNKNOWN**

3FQS enclosure Door-in-door, surface for 69 in box (400 A)

OEM part number	E2A1667-11	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, surface for 69 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00873 **E2A1667-12** Eaton lineage trim **STATUS UNKNOWN**

3FQS enclosure Door-in-door, flush for 69 in box (400 A)

OEM part number	E2A1667-12	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, flush for 69 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00874 **E2A1667-13** Eaton lineage trim **STATUS UNKNOWN**

3FQS enclosure Door, surface for 33 in box (200 A)

OEM part number	E2A1667-13	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, surface for 33 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00875 **E2A1667-14** Eaton lineage trim **STATUS UNKNOWN**

3FQS enclosure Door, flush for 33 in box (200 A)

OEM part number	E2A1667-14	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, flush for 33 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00876	E2A1667-15	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, surface for 33 in box (200 A)

OEM part number	E2A1667-15	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, surface for 33 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00877	E2A1667-16	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, flush for 33 in box (200 A)

OEM part number	E2A1667-16	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, flush for 33 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00878	E2A1667-17	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, surface for 50 in box (400 A)

OEM part number	E2A1667-17	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, surface for 50 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00879	E2A1667-18	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, flush for 50 in box (400 A)

OEM part number	E2A1667-18	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, flush for 50 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00880	E2A1667-19	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, surface for 50 in box (400 A)

OEM part number	E2A1667-19	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, surface for 50 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00863	E2A1667-2	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, surface for 59 in box (200 A)

OEM part number	E2A1667-2	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, surface for 59 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00881	E2A1667-20	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, flush for 50 in box (400 A)

OEM part number	E2A1667-20	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, flush for 50 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00882	E2A1667-21	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, surface for 59 in box (400 A)

OEM part number	E2A1667-21	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, surface for 59 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00883	E2A1667-22	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, flush for 59 in box (400 A)

OEM part number	E2A1667-22	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, flush for 59 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00884	E2A1667-23	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, surface for 59 in box (400 A)

OEM part number	E2A1667-23	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, surface for 59 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00885	E2A1667-24	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, flush for 59 in box (400 A)

OEM part number	E2A1667-24	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, flush for 59 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00864	E2A1667-3	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, flush for 50 in box (200 A)

OEM part number	E2A1667-3	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, flush for 50 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00865	E2A1667-4	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, flush for 59 in box (200 A)

OEM part number	E2A1667-4	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, flush for 59 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00866	E2A1667-5	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, surface for 50 in box (200 A)

OEM part number	E2A1667-5	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, surface for 50 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00867	E2A1667-6	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, surface for 59 in box (200 A)

OEM part number	E2A1667-6	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, surface for 59 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00868	E2A1667-7	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, flush for 50 in box (200 A)

OEM part number	E2A1667-7	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, flush for 50 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00869	E2A1667-8	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, flush for 59 in box (200 A)

OEM part number	E2A1667-8	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, flush for 59 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00870	E2A1667-9	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, surface for 69 in box (400 A)

OEM part number	E2A1667-9	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, surface for 69 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00829	**2A1690-1XX**	3FQS NEMA 1 box, 50 in tall (XX = endwall choice B blank / K knockout)	—	unknown
EDH-EAT-00830	**2A1690-2XX**	3FQS NEMA 1 box, 59 in tall (XX = B/K endwalls)	—	unknown
EDH-EAT-00831	**2A1690-3XX**	3FQS NEMA 1 box, 69 in tall (XX = B/K endwalls)	—	unknown
EDH-EAT-00832	**2A1690-4XX**	3FQS NEMA 1 box, 33 in tall (XX = B/K endwalls)	—	unknown
EDH-EAT-00837	**2A1916-1**	3FQS Kit, blank enclosure endwall (set of 2)	—	unknown
EDH-EAT-00838	**2A1916-2**	3FQS Kit, knockout enclosure endwall (set of 2)	—	unknown
EDH-EAT-00833	**E2A1649-1**	3FQS NEMA 3R enclosure, 51.5 in tall	—	unknown
EDH-EAT-00834	**E2A1649-2**	3FQS NEMA 3R enclosure, 60.5 in tall	—	unknown
EDH-EAT-00835	**E2A1649-3**	3FQS NEMA 3R enclosure, 70.5 in tall	—	unknown
EDH-EAT-00836	**E2A1649-4**	3FQS NEMA 3R enclosure, 34.5 in tall	—	unknown

EDH-EAT-00829 **2A1690-1XX** Eaton lineage box/enclosure **STATUS UNKNOWN**

3FQS NEMA 1 box, 50 in tall (XX = endwall choice B blank / K knockout)

OEM part number	2A1690-1XX	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 1 box, 50 in tall (XX = endwall choice B blank / K knockout)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00830 **2A1690-2XX** Eaton lineage box/enclosure **STATUS UNKNOWN**

3FQS NEMA 1 box, 59 in tall (XX = B/K endwalls)

OEM part number	2A1690-2XX	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 1 box, 59 in tall (XX = B/K endwalls)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00831 **2A1690-3XX** Eaton lineage box/enclosure **STATUS UNKNOWN**

3FQS NEMA 1 box, 69 in tall (XX = B/K endwalls)

OEM part number	2A1690-3XX	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 1 box, 69 in tall (XX = B/K endwalls)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00832 **2A1690-4XX** Eaton lineage box/enclosure **STATUS UNKNOWN**

3FQS NEMA 1 box, 33 in tall (XX = B/K endwalls)

OEM part number	2A1690-4XX	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 1 box, 33 in tall (XX = B/K endwalls)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00837 **2A1916-1** Eaton lineage box/enclosure **STATUS UNKNOWN**

3FQS Kit, blank enclosure endwall (set of 2)

OEM part number	2A1916-1	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	Kit, blank enclosure endwall (set of 2)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00838	2A1916-2	Eaton lineage	box/enclosure	STATUS UNKNOWN

3FQS Kit, knockout enclosure endwall (set of 2)

OEM part number	2A1916-2	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	Kit, knockout enclosure endwall (set of 2)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00833	E2A1649-1	Eaton lineage	box/enclosure	STATUS UNKNOWN

3FQS NEMA 3R enclosure, 51.5 in tall

OEM part number	E2A1649-1	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 3R enclosure, 51.5 in tall	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00834	E2A1649-2	Eaton lineage	box/enclosure	STATUS UNKNOWN

3FQS NEMA 3R enclosure, 60.5 in tall

OEM part number	E2A1649-2	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 3R enclosure, 60.5 in tall	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00835	E2A1649-3	Eaton lineage	box/enclosure	STATUS UNKNOWN

3FQS NEMA 3R enclosure, 70.5 in tall

OEM part number	E2A1649-3	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 3R enclosure, 70.5 in tall	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00836	E2A1649-4	Eaton lineage	box/enclosure	STATUS UNKNOWN

3FQS NEMA 3R enclosure, 34.5 in tall

OEM part number	E2A1649-4	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 3R enclosure, 34.5 in tall	**A**	same as above
Cross-links	Families: PRL3FQS		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00857	**2A1917-2**	3FQS Kit, CCPB hardware (10 screws)	—	unknown
EDH-EAT-00856	**E2A1917-1**	3FQS Kit, panelboard hardware	—	unknown

EDH-EAT-00857	2A1917-2	Eaton lineage	hardware-kit	STATUS UNKNOWN

3FQS Kit, CCPB hardware (10 screws)

OEM part number	2A1917-2	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, CCPB hardware (10 screws)	**A**	same as above
Fasteners	CCPB bus-tab screws #10-32 x 1/4 in, torque 25 lb-in (2.82 N-m)	**A**	S248 p. 7; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00856	E2A1917-1	Eaton lineage	hardware-kit	STATUS UNKNOWN

3FQS Kit, panelboard hardware

OEM part number	E2A1917-1	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, panelboard hardware	**A**	same as above
Cross-links	Families: PRL3FQS		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00849	**2A1912-1**	3FQS Lockout kit, 70-400A main	—	unknown
EDH-EAT-00850	**2A1912-2**	3FQS Lockout kit, 30-60A main	—	unknown
EDH-EAT-00851	**2A1912-3**	3FQS Branch lockout kit (3M Panelsafe), 18 position	—	unknown
EDH-EAT-00852	**2A1912-4**	3FQS Branch lockout kit (3M Panelsafe), 30 position	—	unknown
EDH-EAT-00853	**2A1912-5**	3FQS Branch lockout kit (3M Panelsafe), 42 position	—	unknown

EDH-EAT-00849	2A1912-1	Eaton lineage	padlock-attachment	STATUS UNKNOWN

3FQS Lockout kit, 70-400A main

OEM part number	2A1912-1	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, Lockout/Tagout Devices; oem_spec
Description	Lockout kit, 70-400A main	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00850	2A1912-2	Eaton lineage	padlock-attachment	STATUS UNKNOWN

3FQS Lockout kit, 30-60A main

OEM part number	2A1912-2	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, Lockout/Tagout Devices; oem_spec
Description	Lockout kit, 30-60A main	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00851	2A1912-3	Eaton lineage	padlock-attachment	STATUS UNKNOWN

3FQS Branch lockout kit (3M Panelsafe), 18 position

OEM part number	2A1912-3	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, Lockout/Tagout Devices; oem_spec
Description	Branch lockout kit (3M Panelsafe), 18 position	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00852	2A1912-4	Eaton lineage	padlock-attachment	STATUS UNKNOWN

3FQS Branch lockout kit (3M Panelsafe), 30 position

OEM part number	2A1912-4	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, Lockout/Tagout Devices; oem_spec
Description	Branch lockout kit (3M Panelsafe), 30 position	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00853	2A1912-5	Eaton lineage	padlock-attachment	STATUS UNKNOWN

3FQS Branch lockout kit (3M Panelsafe), 42 position

OEM part number	2A1912-5	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, Lockout/Tagout Devices; oem_spec
Description	Branch lockout kit (3M Panelsafe), 42 position	**A**	same as above
Cross-links	Families: PRL3FQS		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00845	**2A1910-1**	3FQS Kit, NEMA 3R replacement keys (2)	—	unknown
EDH-EAT-00846	**2A1910-2**	3FQS Kit, NEMA 1 door lock and 2 keys	—	unknown
EDH-EAT-00847	**2A1910-3**	3FQS Kit, NEMA 3R door lock and 2 keys	—	unknown
EDH-EAT-00848	**2A1910-4**	3FQS Kit, NEMA 1 replacement keys (2)	—	unknown
EDH-EAT-00855	**2A1915**	3FQS Kit, circuit number and fuse rating labels	—	unknown
EDH-EAT-00860	**2A1919**	3FQS Kit, touch-up paint	—	unknown
EDH-EAT-00861	**2A1961-1**	3FQS Kit, spare fuse compartment TCF 1-100A	—	unknown
EDH-EAT-00886	**CCPB-n-xxCF**	Bussmann CCPB ampacity-rejecting branch disconnect (catalog pattern CCPB-<poles>-<amps>CF)	—	unknown
EDH-EAT-00854	**E2A1914**	3FQS Kit, circuit directory card and sleeve	—	unknown

EDH-EAT-00845	2A1910-1	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, NEMA 3R replacement keys (2)

OEM part number	2A1910-1	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, H - Keys and Locks; oem_spec
Description	Kit, NEMA 3R replacement keys (2)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00846	2A1910-2	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, NEMA 1 door lock and 2 keys

OEM part number	2A1910-2	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, H - Keys and Locks; oem_spec
Description	Kit, NEMA 1 door lock and 2 keys	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00847	2A1910-3	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, NEMA 3R door lock and 2 keys

OEM part number	2A1910-3	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, H - Keys and Locks; oem_spec
Description	Kit, NEMA 3R door lock and 2 keys	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00848	2A1910-4	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, NEMA 1 replacement keys (2)

OEM part number	2A1910-4	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, H - Keys and Locks; oem_spec
Description	Kit, NEMA 1 replacement keys (2)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00855	2A1915	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, circuit number and fuse rating labels

OEM part number	2A1915	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, circuit number and fuse rating labels	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00860	2A1919	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, touch-up paint

OEM part number	2A1919	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, touch-up paint	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00861	2A1961-1	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, spare fuse compartment TCF 1-100A

OEM part number	2A1961-1	**A**	S248 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, spare fuse compartment TCF 1-100A	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00886	CCPB-n-xxCF	Eaton lineage	other	STATUS UNKNOWN

Bussmann CCPB ampacity-rejecting branch disconnect (catalog pattern CCPB-<poles>-<amps>CF)

OEM part number	CCPB-1-(amp)CF / CCPB-2-(amp)CF / CCPB-3-(amp)CF; amps 15, 20, 30, 40, 50, 60, 70, 90, 100	A	S248 pp. 10, 14 (I - CCPB Branch Disconnects); oem_spec
Description	Compact Circuit Protector Base fusible branch disconnect, accepts CUBEFuse TCF (amps)RN / TCF (amps) indicating fuses of rating <= CCPB rating	A	S248 p. 14; oem_spec
Fasteners	Slides onto branch sub-assembly by 'T' slot; bus tab fixed with #10-32 x 1/4 in screw(s) (one per pole) torqued 25 lb-in (2.82 N-m)	A	S248 p. 7; oem_spec
Torque values	Bus tab screws #10-32 x 1/4 in: 25 lb-in (2.82 N-m); load terminal per label 3A1064	A	same as above
Identification features	Indicating CUBEFuse requires date code R38 or later for correct fit; 1-3 A indicating CUBEFuse not available	A	S248 p. 14; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00854	E2A1914	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, circuit directory card and sleeve

OEM part number	E2A1914	A	S248 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, circuit directory card and sleeve	A	same as above
Cross-links	Families: PRL3FQS		

3.29 PRL3X — Pow-R-Line Xpert 3X

FAM-EAT-008 · panelboard · aka PRL3x, Pow-R-Line 3X · markings: Eaton

Successor to PRL3a; same 20 in box and X-unit chassis concept. Uses KPRL3X* connector kits and 42C80xx deadfront covers (PDG2 replaces F-frame).

Attribute	Value	Cl.	Sources
Status	Current	A	S6 oem_spec
Era of manufacture	Introduced 2020	A	S1 p.2; oem_spec
Voltage rating	240, 480 or 600 Vac; 250 Vdc	A	S6 p.V2-T3-11; oem_spec
Main ampacity	MLO 800 A; main device 600 A	A	same as above
Branch breakers accepted	Bolt-on 15-225 A: BAB/QBH family, GHB family, PDG2 (twin to 150 A, single 175-225 A); vertical PDG2/PDG3 mains	A	S1, S6 oem_spec
Main handle location	PRL3X PD frame 2 main: D = 10.901 in (100 A max) / 15.026 in (225 A max); PD frame 3 400 A: 19.962 in (500 kcmil) / 24.087 in (750 kcmil) (Dimensions are estimates to be verified by installer (per leaflet))	A	S253 pp. 2-6, Figures 1-5; oem_spec

Breaker families associated: GHB family (480Y/277 bolt-on), Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3), QUICKLAG bolt-on (BAB/QBHW family)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S249 DG014001EN Design Guide DG014001EN Pow-R-Line 1X, 2X and 3X panelboards (Effective November 2024); S253 IL014069EN Instruction Leaflet IL014069EN Pow-R-Line 1X/2X/3X Installation reference for tall interio

Also fits this family (entry printed elsewhere): KPRL3XBA06, KPRL3XBA06-1, KPRL3XBA12, KPRL3XBA12-1, KPRL3XBA18, KPRL3XBA18-1, KPRL3XBA24, KPRL3XBA24-1, KPRL3XGB06, KPRL3XGB06-1, KPRL3XGB12, KPRL3XGB12-1, KPRL3XGB18, KPRL3XGB18-1, KPRL3XGB24, KPRL3XGB24-1, KPRL3ABA06, KPRL3ABA06-1, KPRL3ABA12, KPRL3ABA12-1, KPRL3ABA18, KPRL3ABA18-1, KPRL3ABA24, KPRL3AGB06, KPRL3AGB12, KPRL3AGB12-1, KPRL3AGB18, KPRL3AGB18-1, KPRL3AGB24, KPRL3X23, KPRL3X22, KPRL3X23T, KPRL3X22T, KPRL3AFD3, KPRL3AFD2, KPRL3AED3, PRLSEBLGKD, PRLSEBFD, PRLSEBGHB, PRLSEBPD3, PRLSEBPD2, 5078A98, 5158C05, 2C11296, 5155C62H01, 6559C59, 42C8076, 42C8077, 4176B72, 42C8078, 42C8079, 42C8080, 42C8081, 42C8082, 4176B67, 4176B69, 4180B91, 42C8083H01, 5155C81G01, 5155C81G03, 2C11641G02, 5157C83G06, 7499A48G04, PRLSEBPD5, PRLSEBPD4, PRLSEBBAB, EZB2024R, EZBP2024R, EZT2024S, EZT2024F, EZTV2024S, EZTV2024F, EZB2030R, EZBP2030R, EZT2030S, EZT2030F, EZTV2030S, EZTV2030F, EZB2036R, EZBP2036R, EZT2036S, EZT2036F, EZTV2036S, EZTV2036F, EZB2042R, EZBP2042R, EZT2042S, EZT2042F, EZTV2042S, EZTV2042F, EZB2048R, EZBP2048R, EZT2048S, EZT2048F, EZTV2048S, EZTV2048F, EZB2054R, EZBP2054R, EZT2054S, EZT2054F, EZTV2054S, EZTV2054F, EZB2060R, EZBP2060R, EZT2060S, EZT2060F, EZTV2060S, EZTV2060F, EZB2072R, EZBP2072R, EZT2072S, EZT2072F, EZTV2072S, EZTV2072F, EZB2090R, EZBP2090R, EZT2090S, EZT2090F, EZTV2090S, EZTV2090F, VWPB2024, LWPT2024, VWPB2036, LWPT2036, VWPB2048, LWPT2048, VWPB2060, LWPT2060, VWPB2072, LWPT2072, VWPB2090, LWPT2090, 5155C81G04, 5155C81G05, 5155C81G06, LKD1, LKD3, LKD4, GPHBOFF, PHB3, PHL1, PLK1, PLK1LOFF, PLK1ROFF, PLK3, PLK3LOFF, PLK3ROFF, HLK4, HLK4LOFF, HLK4S, HLK4SOFF, PLK5, PLK5S, PLK5SOFF, HLK6, HLK6OFF, EFHB, EFPHB, EFPHBOFF, FJPHBOFF, LBHPOFF, EFPHL, FJPHL, LPHL, EFPHLOFF, FJPHLOFF, LPHLOFF, PLK55OFF, A1X1PK, E1X1PK, A2X1LPK, A2X1RPK, A1X1LTK, A1X1RTK, A1X1RPKFDE, SNT1LP03K, SNT1LP08K, SNT1LP12K, SNT1LP18K, SNT1RP03K, SNT1RP08K, SNT1RP12K, SNT1RP18K, UVH1LP08K, UVH1LP11K, UVH1LP15K, UVH1RP08K, UVH1RP11K, UVH1LP21K

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00204	**KPRL3X21T**	PRL3X horizontal PDG2 breaker connector kit (PDG2 1-pole twin mount...)	PDG2 1-pole twin mount, 150 A max. Frame devices above 150 A must be s A	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00204	KPRL3X21T	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 1-pole twin mount...)

OEM part number	KPRL3X21T	A	S1 s1 p.23 Table 31; oem_spec
Description	Horizontally mounted connector kit: PDG2 1-pole twin mount, 150 A max; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	PDG2 1-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00257	**42C7980**	PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00258	**42C8055**	PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock-off version	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00257	42C7980	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)

OEM part number	42C7980	A	S1 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top (thermal-magnetic), H02 bottom (PXR)	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: PDG3 400 A vertical cover, 15X (PRL3X)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00258	42C8055	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock-off version

OEM part number	42C8055	A	S1 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock-off version	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.30 PRL4 — Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)

FAM-EAT-005 · panelboard · aka PRL-4, PRL4, PRL4B, PRL4D, PRL4F, PRL4X, Pow-R-Line 4, Pow-R-Line 4B, Pow-R-Line 4D, Pow-R-Line 4F · markings: Cutler-Hammer, Eaton, Westinghouse

Heavy distribution panelboard in 24, 36 or 44 in wide boxes (BX2457..BX4490), neutral in main gutter, vertical bus with branch devices horizontally mounted single or twin on KPRL4* connector kits measured in X units (1X = 1.38 in). Front is a vented cover assembly (two side rails, top/bottom vented covers, 6574C74) plus individual device covers and blank covers (6554C01/6554C02). Density-rated bus option required for some 100% rated breaker kits.

Westinghouse-origin power distribution panelboard (24, 36, 44 in box widths) that replaced CDP (PRL4B) and FDP (PRL4F). Its KPRL4 breaker connector kits (copper connectors, brackets, covers, hardware) are the most completely documented group-mount kits for Series C FD/JD/KD/LD/MDL/ND frames; included here because the same device X-spacing is used in Pow-R-Line C switchboard distribution chassis.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts listed April 2021; superseded by PRL4X/PRL4DX (PRL4F continues in Xpert catalog)	A	S1, S6 oem_spec
	current (PRL4X / Pow-R-Line Xpert naming in 2022 RP01400001E)	A	S17 p. 32; oem_spec
Era of manufacture	PRL4B/F introduced October 1987	A	S1, S2 p.2 Table 1; oem_spec
	PRL4B/F introduced October 1987 (originally a Westinghouse product)	A	S16, S13 RP01400001E (2017) p. 2 Table 1; V12-T4-18; oem_spec
Successor	PRL4X	A	S1, S6 oem_spec
Voltage rating	240, 480 or 600 Vac; 600 Vdc maximum	A	S7 p.22.4-1; oem_spec
Main ampacity	MLO 250, 400, 600, 800, 1200 A; main breakers 250-1200 A; main switches 200-1200 A	A	same as above
	1200 A maximum	A	S13 p. V12-T4-18; oem_spec
Branch breakers accepted	Bolt-on breakers 15-1200 A (EHD..FDC, ED, JD, DK/KD, CKD, LD, LG, LHH, MDL, ND, NHH, CA, FCL, LCL, FB-P, LA-P, NB-P); drawout 20-600 A (PRL4D); fusible switches FDPW/FDPB 30-1200 A (PRL4F)	A	S1, S7 s1 pp.32-34; s7 p.22.4-1; oem_spec
Box width	24.00, 36.00, 44.00 in (609.6, 914.4, 1117.6 mm)	A	S1 p.2; oem_spec
Bus	250-1200 A tin-plated aluminum standard, copper optional, density-rated bus optional	A	S7 p.22.4-1; oem_spec
Box widths	PRL4 standard widths 24.00, 36.00 and 44.00 in	A	S16 p. 2; oem_spec

Breaker families associated: CA, CA/CAH/HCA 225 A frame, Current-limiting FCL / LCL (and FDB+LFB), ED, EHD, FD, JD, KD, LD, MDL, ND, Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, TRI-PAC integrally fused (FB-P, LA-P, NB-P), Tri-Pac

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S4 RP01414001E Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S16 RP01400001E (2017) Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, ; S17 RP01400001E Renewal Parts RP01400001E — Pow-R-Line Xpert and legacy panelboards

Also fits this family (entry printed elsewhere): K80522, K80133, K80429, 5157C83G06, SPD120480Y2C, LKD1, LKD3, LKD4, GPHBOFF, PHB3, PHL1, PLK1, PLK1LOFF, PLK1ROFF, PLK3, PLK3LOFF, PLK3ROFF, HLK4, HLK4LOFF, HLK4S, HLK4SOFF, PLK5, PLK5S, PLK5SOFF, HLK6, HLK6OFF, EFHB, EFPHB, EFPHBOFF, FJPHBOFF, LBHPOFF, EFPHL, FJPHL, LPHL, EFPHLOFF, FJPHLOFF, LPHLOFF, PLK55OFF, A1X1PK, E1X1PK, A2X1LPK, A2X1RPK, A1X1LTK, A1X1RTK, A1X1RPKFDE, SNT1LP03K, SNT1LP08K, SNT1LP12K, SNT1LP18K, SNT1RP03K, SNT1RP08K, SNT1RP12K, SNT1RP18K, UVH1LP08K, UVH1LP11K, UVH1LP15K, UVH1RP08K, UVH1RP11K, UVH1LP21K

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00331	**KPRL44X**	PRL4F fusible switch connector kit KPRL44X	FDPWT3222R (240 V) / FDPWT3622R (600 V) 60-60 A twin switch; fits FDP A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00333	**KPRL45X**	PRL4F fusible switch connector kit KPRL45X	FDPW 100-100 A twin switch, 600 V (2009 number) (three-pole switch, no A	Listed in 2009/2011 editions only
EDH-EAT-00332	**KPRL45X1**	PRL4F fusible switch connector kit KPRL45X1	FDPWT3633R 600 V 100-100 A twin switch (2021 number) (three-pole switc A	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00334	**KPRL45XS**	PRL4F fusible switch connector kit KPRL45XS	FDPW 100 A single-mount switch (three-pole switch, not included) A	Listed in 2009/2011 editions only
EDH-EAT-00335	**KPRL4B6XS**	PRL4F fusible switch connector kit KPRL4B6XS	FDPBS324R / FDPBS364R 200 A single switch (three-pole switch, not incl A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00336	**KPRL4B6XT**	PRL4F fusible switch connector kit KPRL4B6XT	FDPBT3244R / FDPBT3644R 200-200 A twin switch; 44 in box required (thr A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00338	**KPRL4W11X**	PRL4F fusible switch connector kit KPRL4W11X	FDPW326R/FDPW366R 600 A and FDPW327/FDPW367 800 A (800 A: 44 in box) (A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00339	**KPRL4W15X**	PRL4F fusible switch connector kit KPRL4W15X	FDPW328 / FDPW368 1200 A; 44 in box required (three-pole switch, not i A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00337	**KPRL4W9X**	PRL4F fusible switch connector kit KPRL4W9X	FDPW325R / FDPW365R 400 A (three-pole switch, not included) A	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00331	KPRL44X	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL44X

OEM part number	KPRL44X	A	S1, S2, S3, S4, S16, S17 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	UPC 782114796184	A	S251 alias; skuPage.KPRL44X (General/Product specifications); oem_spec
Description	PRL4F fusible switch connector kit for FDPWT3222R (240 V) / FDPWT3622R (600 V) 60-60 A twin switch; fits FDP and FDPW switches	A	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
	Eaton, panelboard connector kit, for fdpwt3222r, fdpwt3211r, fdpwt3622r, fdptwt3611r, fdpwt3233r, three-phase, three-pole, 30-100a, includes copper connectors, extension wings (when required), hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL44X (General/Product specifications); oem_spec
Application	branch	A	S16 p. 25; oem_spec
Breaker compatibility	FDPWT3222R (240 V) / FDPWT3622R (600 V) 60-60 A twin switch; fits FDP and FDPW switches (three-pole switch, not included)	A	S1, S2, S3, S4 oem_spec
	60 A FDPWT3222R/FDPWT3622R (also fits FDP and FDPW switches)	A	S16 p. 25 Table 38; oem_spec
	FDPWT3222R, FDPWT3211R, FDPWT3622R, FDPTWT3611R, FDPWT3233R (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL44X (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	30-100A	A	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
	Copper connectors, extension wings (when required), hardware and instructions	A	S251 skuPage.KPRL44X (General/Product specifications); oem_spec
Dimensions	Switch space 4X (5.50 in)	A	S1 oem_spec
	4X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S17 oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL44X (General/Product specifications); oem_spec

Installation requirements	Switches are not included. Will fit FDPW switches. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 1.5 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00333	KPRL45X	Cutler-Hammer	branch-connector-kit	LISTED IN 2009/2011 ED

PRL4F fusible switch connector kit KPRL45X

OEM part number	KPRL45X	A	S2, S4 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	UPC 782114796214	A	S251 alias; skuPage.KPRL45X (General/Product specifications); oem_spec
	KPRL45X1	C	S1, S2, S3 superseded_by; inference
Description	PRL4F fusible switch connector kit for FDPW 100-100 A twin switch, 600 V (2009 number)	A	S2, S4 oem_spec
	Eaton, panelboard connector kit, copper connectors, extension wings (when required), hardware and instructions, panelboard connector kit (Eaton web product description)	A	S251 skuPage.KPRL45X (General/Product specifications); oem_spec
Breaker compatibility	FDPW 100-100 A twin switch, 600 V (2009 number) (three-pole switch, not included)	A	S2, S4 oem_spec
	FDPWT3633R (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL45X (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100A	A	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S2 oem_spec
	Copper connectors, extension wings (when required), hardware and instructions	A	S251 skuPage.KPRL45X (General/Product specifications); oem_spec
Dimensions	Switch space 5X (6.88 in)	A	S2 oem_spec
Status	Listed in 2009/2011 editions only	B	S2, S4 inference
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL45X (General/Product specifications); oem_spec
Installation requirements	Switches are not included. Will fit FDPW switches. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 1.5 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00332	KPRL45X1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL45X1

OEM part number	KPRL45X1	A	S1, S3, S16, S17 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	KPRL45X (Same table row; 2009 KPRL45X, 2017/2021 KPRL45X1)	C	S1, S2, S3 supersedes; inference
Description	PRL4F fusible switch connector kit for FDPWT3633R 600 V 100-100 A twin switch (2021 number)	A	S1, S3 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	FDPWT3633R 600 V 100-100 A twin switch (2021 number) (three-pole switch, not included)	A	S1, S3 oem_spec
	100 A 600 V FDPWT3633R	A	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
Dimensions	Switch space 5X (6.88 in)	A	same as above
	5X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S17 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00334	KPRL45XS	Cutler-Hammer	branch-connector-kit	LISTED IN 2009/2011 ED

PRL4F fusible switch connector kit KPRL45XS

OEM part number	KPRL45XS	A	S4 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	UPC 782114796207	A	S251 alias; skuPage.KPRL45XS (General/Product specifications); oem_spec
Description	PRL4F fusible switch connector kit for FDPW 100 A single-mount switch	A	S4 oem_spec
	Eaton, panelboard connector kit, copper connectors, , hardware and instructions, extension wings (when required), panelboard connector kit (Eaton web product description)	A	S251 skuPage.KPRL45XS (General/Product specifications); oem_spec
Breaker compatibility	FDPW 100 A single-mount switch (three-pole switch, not included)	A	S4 oem_spec
	FDPWS323R, FDPWS363R (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL45XS (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100A	A	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S4 oem_spec
	Copper connectors, extension wings (when required), hardware and instructions	A	S251 skuPage.KPRL45XS (General/Product specifications); oem_spec
Dimensions	Switch space unknown	D	S4 oem_spec
Status	Listed in 2009/2011 editions only	B	S4 inference
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL45XS (General/Product specifications); oem_spec
Installation requirements	Switches are not included. Will fit FDPW switches. (Eaton web 'Catalog Notes')	A	same as above

Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 1.5 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00335	KPRL4B6XS	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4B6XS

OEM part number	KPRL4B6XS	A	S1, S2, S3, S4, S16, S17 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPBS324R / FDPBS364R 200 A single switch	A	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	FDPBS324R / FDPBS364R 200 A single switch (three-pole switch, not included)	A	S1, S2, S3, S4 oem_spec
	200 A FDPBS324R/FDPBS364R	A	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
Dimensions	Switch space 6X (8.25 in)	A	same as above
	6X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S17 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00336	KPRL4B6XT	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4B6XT

OEM part number	KPRL4B6XT	A	S1, S2, S3, S4, S16, S17 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPBT3244R / FDPBT3644R 200-200 A twin switch; 44 in box required	A	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	FDPBT3244R / FDPBT3644R 200-200 A twin switch; 44 in box required (three-pole switch, not included)	A	S1, S2, S3, S4 oem_spec
	200 A FDPBT3244R/FDPBT3644R (44 in box)	A	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
Dimensions	Switch space 6X (8.25 in)	A	same as above
	6X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S17 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00338	KPRL4W11X	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4W11X

OEM part number	KPRL4W11X	**A**	S1, S2, S3, S4, S16, S17 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	UPC 782114795194	**A**	S251 alias; skuPage.KPRL4W11X (General/Product specifications); oem_spec
Description	PRL4F fusible switch connector kit for FDPW326R/FDPW366R 600 A and FDPW327/FDPW367 800 A (800 A: 44 in box)	**A**	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	**A**	S16 p. 25; oem_spec
	Eaton, replacement kit, copper connectors, extension wings (when required), hardware and instructions (Eaton web product description)	**A**	S251 skuPage.KPRL4W11X (General/Product specifications); oem_spec
Application	branch	**A**	S16 p. 25; oem_spec
Breaker compatibility	FDPW326R/FDPW366R 600 A and FDPW327/FDPW367 800 A (800 A: 44 in box) (three-pole switch, not included)	**A**	S1, S2, S3, S4 oem_spec
	600 A FDPW326R/FDPW366R and 800 A FDPW327/FDPW367 (44 in box)	**A**	S16 p. 25 Table 38; oem_spec
	FDPW326R, FDPW327, FDPW366R, FDPW367 (Eaton web 'Used with' attribute)	**A**	S251 skuPage.KPRL4W11X (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	**A**	same as above
Current rating	600-800A	**A**	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	**A**	S1 oem_spec
	Copper connectors, extension wings (when required), hardware and instructions	**A**	S251 skuPage.KPRL4W11X (General/Product specifications); oem_spec
Dimensions	Switch space 11X (15.13 in)	**A**	S1 oem_spec
	11X switch height	**A**	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.34; oem_spec
	listed 2017 and 2022	**A**	S16, S17 oem_spec
Listing / approvals	UL Listed	**A**	S251 skuPage.KPRL4W11X (General/Product specifications); oem_spec
Installation requirements	Switches are not included. 44-inch box width required for both R and J fuse applications. (Eaton web 'Catalog Notes')	**A**	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 25.5 in, height 3.5 in, width 9.5 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00339	KPRL4W15X	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4W15X

OEM part number	KPRL4W15X	A	S1, S2, S3, S4, S16, S17 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPW328 / FDPW368 1200 A; 44 in box required	A	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	FDPW328 / FDPW368 1200 A; 44 in box required (three-pole switch, not included)	A	S1, S2, S3, S4 oem_spec
	1200 A FDPW328/FDPW368 (44 in box)	A	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
Dimensions	Switch space 15X (20.63 in)	A	same as above
	15X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S17 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00337	KPRL4W9X	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4W9X

OEM part number	KPRL4W9X	A	S1, S2, S3, S4, S16, S17 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	UPC 786679004203	A	S251 alias; skuPage.KPRL4W9X (General/Product specifications); oem_spec
Description	PRL4F fusible switch connector kit for FDPW325R / FDPW365R 400 A	A	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
	Eaton, panelboard connector kit, copper connectors, extension wings (when required), hardware - instructions, panelboard connector kit (Eaton web product description)	A	S251 skuPage.KPRL4W9X (General/Product specifications); oem_spec
Application	branch	A	S16 p. 25; oem_spec
Breaker compatibility	FDPW325R / FDPW365R 400 A (three-pole switch, not included)	A	S1, S2, S3, S4 oem_spec
	400 A FDPW325R/FDPW365R	A	S16 p. 25 Table 38; oem_spec
	FDPW325R, FDPW365R (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4W9X (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	400A	A	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
	Copper connectors, extension wings (when required), hardware and instructions	A	S251 skuPage.KPRL4W9X (General/Product specifications); oem_spec
Dimensions	Switch space 9X (12.38 in)	A	S1 oem_spec
	9X switch height	A	S16 p. 25; oem_spec

Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.34; oem_spec
	listed 2017 and 2022	**A**	S16, S17 oem_spec
Listing / approvals	UL Listed UL 67	**A**	S251 skuPage.KPRL4W9X (General/Product specifications); oem_spec
Installation requirements	Switches are not included. (Eaton web 'Catalog Notes')	**A**	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 23.5 in, height 1.5 in, width 7.25 in, weight 5.83 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00022	**BPRL4BEDCH**	Aftermarket bus connection kit BPRL4BEDCH (seller cross-ref to EAT KPRL4ED)	mounts two FD/HFD/ED/EDH/EDB/EHD breakers (225 A max) **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00021	**BPRL4BFDCH**	Aftermarket bus connection kit BPRL4BFDCH (seller cross-ref to EAT KPRL4FD)	mounts two F-frame breakers (150 A max) **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00023	**BPRL4BJDSCH**	Aftermarket bus connection kit BPRL4BJDSCH (seller cross-ref to EAT KPRL4JDS)	mounts one J-frame breaker (250 A max) **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00024	**BPRL4BKDSCH**	Aftermarket bus connection kit BPRL4BKDSCH (seller cross-ref to EAT KPRL4KDS)	mounts one K-frame breaker (400 A max) **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00025	**BPRL4BLDSCH**	Aftermarket bus connection kit BPRL4BLDSCH (seller cross-ref to EAT KPRL4LDS)	mounts one L-frame breaker (600 A max) **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00013	**BPRLCACH**	Aftermarket bus connection kit BPRLCACH (seller cross-ref to EAT KPRL4CA)	mounts two CA, CAH, HCA breakers **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00012	**BPRLEDCH**	Aftermarket bus connection kit BPRLEDCH (seller cross-ref to EAT KPRL4ED)	mounts two ED, EDH, EDC, FD, HFD breakers **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00011	**BPRLFDCH**	Aftermarket bus connection kit BPRLFDCH (seller cross-ref to EAT KPRL4FD)	mounts two F-frame breakers (150 A max) **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00015	**BPRLJDSCH**	Aftermarket bus connection kit BPRLJDSCH (seller cross-ref to EAT KPRL4JDS)	mounts one JD/HJD, JB, KB, HKB breaker **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00014	**BPRLJDTCH**	Aftermarket bus connection kit BPRLJDTCH (seller cross-ref to EAT KPRL4JDT)	mounts two JD, HJD, JB, KB, HKB breakers **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00017	**BPRLKDSCH**	Aftermarket bus connection kit BPRLKDSCH (seller cross-ref to EAT KPRL4KDS)	mounts one KD, HKD, DK frame breaker **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00016	**BPRLKDTCH**	Aftermarket bus connection kit BPRLKDTCH (seller cross-ref to EAT KPRL4KDT)	mounts two K-frame breakers (400 A max) **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00018	**BPRLLDCH**	Aftermarket bus connection kit BPRLLDCH (seller cross-ref to EAT KPRL4LD)	mounts one LD, HLD, LC, LA, HLA breaker (600 A max) **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00019	**BPRLMDCH**	Aftermarket bus connection kit BPRLMDCH (seller cross-ref to EAT KPRL4MD)	mounts one MDL, HMDL, MA, HMA, MC, HMC breaker **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-OTH-00020	**BPRLNDCH**	Aftermarket bus connection kit BPRLNDCH (seller cross-ref to EAT KPRL4ND)	mounts one NB, HNB, NC, HNC, ND, HND breaker **C**	current aftermarket item; listing label 'EATON/Cutler Afterm
EDH-EAT-00308	**KPRL4CA**	PRL4/PRL4X breaker connector kit KPRL4CA (CA/CAH/HCA 2-pole (2X) or 3-pole (3X))	CA/CAH/HCA 2-pole (2X) or 3-pole (3X) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00322	**KPRL4CKD**	PRL4/PRL4X breaker connector kit KPRL4CKD (100% rated CKD/CHKD/CKDC 3-pole)	100% rated CKD/CHKD/CKDC 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00324	**KPRL4CND**	PRL4/PRL4X breaker connector kit KPRL4CND (100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole)	100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00329	**KPRL4ED**	PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)	ED, EDH, EDC 3-pole **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00327	**KPRL4ED2**	PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)	ED, EDH, EDC 2-pole **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00311	**KPRL4FBP**	PRL4/PRL4X breaker connector kit KPRL4FBP (FCL, FB-P, FD/LFD 3-pole)	FCL, FB-P, FD/LFD 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00328	**KPRL4FD**	PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)	EHD, FD, FDB, HFD, FDC 3-pole, 225 A (single- and twin-mount per 2011 **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00325	**KPRL4FD1**	PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)	EHD, FD, HFD 1-pole (two sets twin-mounted 1-pole) **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00326	**KPRL4FD2**	PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)	EHD, FD, FDB, HFD, FDC 2-pole **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00307	**KPRL4FDCL**	PRL4/PRL4X breaker connector kit KPRL4FDCL (FD current limiter, 3-pole)	FD current limiter, 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00309	**KPRL4JDS**	PRL4/PRL4X breaker connector kit KPRL4JDS (JD, JDB, HJD, JDC 2-/3-pole)	JD, JDB, HJD, JDC 2-/3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00310	**KPRL4JDT**	PRL4/PRL4X breaker connector kit KPRL4JDT (JD, JDB, HJD, JDC 2-/3-pole)	JD, JDB, HJD, JDC 2-/3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00312	**KPRL4KDS**	PRL4/PRL4X breaker connector kit KPRL4KDS (DK, KD, KDB, HKD, KDC 2-/3-pole)	DK, KD, KDB, HKD, KDC 2-/3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00313	**KPRL4KDT**	PRL4/PRL4X breaker connector kit KPRL4KDT (DK, KD, KDB, HKD, KDC 2-/3-pole)	DK, KD, KDB, HKD, KDC 2-/3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00317	**KPRL4LAP**	PRL4/PRL4X breaker connector kit KPRL4LAP (LA-P 3-pole)	LA-P 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00314	**KPRL4LC**	PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; also 100% rated CLD/CHLD/CLDC and LCC/ **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00318	**KPRL4LCL**	PRL4/PRL4X breaker connector kit KPRL4LCL (LCL 3-pole)	LCL 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00330	**KPRL4LD**	PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)	LD, LDB, HLD, LDC, CLD, LC 2-/3-pole, 600 A **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-01237	**KPRL4LDS**	PRL4B column breaker connector kit KPRL4LDS (L-frame single) - per aftermarket seller cross-reference	—	unknown
EDH-EAT-00315	**KPRL4LG**	PRL4/PRL4X breaker connector kit KPRL4LG (LHH 3-pole)	LHH 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00316	**KPRL4MC**	PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])	MDS/MC/MCY/HMC [MA/HMA]; 100% MCC/HMCC, MDSC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00323	**KPRL4MD**	PRL4/PRL4X breaker connector kit KPRL4MD (100% rated CMDL/CHMDL 3-pole (2021))	100% rated CMDL/CHMDL 3-pole (2021); 3-pole M-frame 800 A (2011) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00319	**KPRL4NBP**	PRL4/PRL4X breaker connector kit KPRL4NBP (NB-P 3-pole)	NB-P 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00320	**KPRL4NC**	PRL4/PRL4X breaker connector kit KPRL4NC (NC/NCY/HNC [NB/HNB] 3-pole)	NC/NCY/HNC [NB/HNB] 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00321	**KPRL4ND**	PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))	NHH 3-pole (2021); ND/HND 2-/3-pole (2009/2011) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00299	**KPRL4X12**	PRL4/PRL4X breaker connector kit KPRL4X12 (PDG2 1-pole (two sets of twin-mounted 1-pole))	PDG2 1-pole (two sets of twin-mounted 1-pole); EHD/FDB/FD/HFD/FDC 1-po **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00300	**KPRL4X22**	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	PDG2 2-pole; EHD/FDB/FD/HFD/FDC/ED/EDH/EDC 2-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00301	**KPRL4X32**	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	PDG2 3-pole; ED/EDH/EDC/FDE/HFDE/FDCE and ED/EDH/EDC/EDB/EDS 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00302	**KPRL4X334S**	PRL4/PRL4X breaker connector kit KPRL4X334S (PDG3 400 A frame, 3-pole, single mounting)	PDG3 400 A frame, 3-pole, single mounting **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00303	**KPRL4X334T**	PRL4/PRL4X breaker connector kit KPRL4X334T (PDG3 400 A frame, 3-pole, twin mounting)	PDG3 400 A frame, 3-pole, twin mounting **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00304	**KPRL4X336**	PRL4/PRL4X breaker connector kit KPRL4X336 (PDG3 600 A frame)	PDG3 600 A frame; LGE/LGS/LGH/LGC/LGU, 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00305	**KPRL4X34**	PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)	PDG4; MDL/HMDL 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00306	**KPRL4X35**	PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)	PDG5; ND/HND/NDC/NGS/NGH/NGC 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-OTH-00022	**BPRL4BEDCH**	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRL4BEDCH (seller cross-ref to EAT KPRL4ED)

OEM part number	BPRL4BEDCH (Breaker King catalog/model number)	**C**	S626 distributor
Alternate / superseded numbers	KPRL4ED [equivalent] (seller cross-reference: 'Kit #ED4BK replaces OEM KPRL4ED')	**C**	same as above
	ED4BK [alias] (seller/PCS kit number quoted in listing)	**C**	same as above
Description	Bus hardware for PRL4B column panelboards in 24-36 in wide enclosures; mounts two FD/HFD/ED/EDH/EDB/EHD breakers (225 A max) (seller listing text (may be truncated))	**C**	same as above
Breaker compatibility	mounts two FD/HFD/ED/EDH/EDB/EHD breakers (225 A max) (seller claim; compatibility from distributor only)	**C**	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	**C**	same as above
Replacement / successor	Seller states it replaces OEM KPRL4ED ('Kit #ED4BK replaces OEM KPRL4ED') (seller claim; not OEM-verified; no listing/UL statement on page)	**C**	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00021	**BPRL4BFDCH**	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRL4BFDCH (seller cross-ref to EAT KPRL4FD)

OEM part number	BPRL4BFDCH (Breaker King catalog/model number)	**C**	S626 distributor
Alternate / superseded numbers	KPRL4FD [equivalent] (seller cross-reference: 'Kit # FD4BK replaces OEM KPRL4FD')	**C**	same as above
	FD4BK [alias] (seller/PCS kit number quoted in listing)	**C**	same as above
Description	Bus hardware for PRL4B column panelboards in 24-36 in wide enclosures; mounts two F-frame breakers (150 A max) (seller listing text (may be truncated))	**C**	same as above
Breaker compatibility	mounts two F-frame breakers (150 A max) (seller claim; compatibility from distributor only)	**C**	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	**C**	same as above
Replacement / successor	Seller states it replaces OEM KPRL4FD ('Kit # FD4BK replaces OEM KPRL4FD') (seller claim; not OEM-verified; no listing/UL statement on page)	**C**	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00023	BPRL4BJDSCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRL4BJDSCH (seller cross-ref to EAT KPRL4JDS)

OEM part number	BPRL4BJDSCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4JDS [equivalent] (seller cross-reference: 'Kit # JDS4BK replaces OEM KRPL4JDS (sic; read as KPRL4JDS)')	C	same as above
	JDS4BK [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for PRL4B column panelboards in 24-36 in wide enclosures; mounts one J-frame breaker (250 A max) (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one J-frame breaker (250 A max) (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4JDS ('Kit # JDS4BK replaces OEM KRPL4JDS (sic; read as KPRL4JDS)') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00024	BPRL4BKDSCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRL4BKDSCH (seller cross-ref to EAT KPRL4KDS)

OEM part number	BPRL4BKDSCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4KDS [equivalent] (seller cross-reference: 'Kit # KDS4BK replaces OEM KPRL4KDS')	C	same as above
	KDS4BK [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for PRL4B column panelboards in 24-36 in wide enclosures; mounts one K-frame breaker (400 A max) (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one K-frame breaker (400 A max) (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4KDS ('Kit # KDS4BK replaces OEM KPRL4KDS') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00025	BPRL4BLDSCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRL4BLDSCH (seller cross-ref to EAT KPRL4LDS)

OEM part number	BPRL4BLDSCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4LDS [equivalent] (seller cross-reference: 'Kit # LDS4BK replaces OEM KPRL4LDS')	C	same as above
	LDS4BK [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for PRL4B column panelboards in 24-36 in wide enclosures; mounts one L-frame breaker (600 A max) (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one L-frame breaker (600 A max) (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4LDS ('Kit # LDS4BK replaces OEM KPRL4LDS') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00013	BPRLCACH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRLCACH (seller cross-ref to EAT KPRL4CA)

OEM part number	BPRLCACH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4CA [equivalent] (seller cross-reference: 'Kit # CA4K replaces OEM KPRL4CA')	C	same as above
	CA4K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for PRL4, PRL4A, PM4 panelboards; mounts two CA, CAH, HCA breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two CA, CAH, HCA breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4CA ('Kit # CA4K replaces OEM KPRL4CA') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PRL4, CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00012	BPRLEDCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRLEDCH (seller cross-ref to EAT KPRL4ED)

OEM part number	BPRLEDCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4ED [equivalent] (seller cross-reference: 'Kit # ED4K replaces OEM KPRL4ED')	C	same as above
	ED4K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for PRL4, PRL4A, PM4 panelboards; mounts two ED, EDH, EDC, FD, HFD breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two ED, EDH, EDC, FD, HFD breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4ED ('Kit # ED4K replaces OEM KPRL4ED') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PRL4, CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00011	BPRLFDCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRLFDCH (seller cross-ref to EAT KPRL4FD)

OEM part number	BPRLFDCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4FD [equivalent] (seller cross-reference: 'OEM Item KPRL4FD Is ... (truncated on listing)')	C	same as above
Description	Bus hardware for PRL4 panelboards (also listed for Westinghouse PRL4 and Challenger PM4); mounts two F-frame breakers (150 A max) (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two F-frame breakers (150 A max) (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4FD ('OEM Item KPRL4FD Is ... (truncated on listing)') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PRL4, CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00015	BPRLJDSCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRLJDSCH (seller cross-ref to EAT KPRL4JDS)

OEM part number	BPRLJDSCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4JDS [equivalent] (seller cross-reference: 'Kit # JDS4K replaces OEM KPRL4JDS')	C	same as above
	JDS4K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for PRL4, PRL4A, PM4 panelboards; mounts one JD/HJD, JB, KB, HKB breaker (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one JD/HJD, JB, KB, HKB breaker (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4JDS ('Kit # JDS4K replaces OEM KPRL4JDS') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PRL4, CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00014	BPRLJDTCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRLJDTCH (seller cross-ref to EAT KPRL4JDT)

OEM part number	BPRLJDTCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4JDT [equivalent] (seller cross-reference: 'Kit # JD4K replaces OEM KPRL4JDT')	C	same as above
	JD4K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for PRL4, PRL4A, PM4 panelboards; mounts two JD, HJD, JB, KB, HKB breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two JD, HJD, JB, KB, HKB breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4JDT ('Kit # JD4K replaces OEM KPRL4JDT') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PRL4, CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00017	BPRLKDSCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRLKDSCH (seller cross-ref to EAT KPRL4KDS)

OEM part number	BPRLKDSCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4KDS [equivalent] (seller cross-reference: 'Kit # KDS4K replaces OEM KPRL4KDS')	C	same as above
	KDS4K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for PRL4, PRL4A, PM4 panelboards; mounts one KD, HKD, DK frame breaker (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one KD, HKD, DK frame breaker (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4KDS ('Kit # KDS4K replaces OEM KPRL4KDS') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PRL4, CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00016	BPRLKDTCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRLKDTCH (seller cross-ref to EAT KPRL4KDT)

OEM part number	BPRLKDTCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4KDT [equivalent] (seller cross-reference: 'OEM Item KPRL4KDT Is Provided as PCS Brand Aftermarket Kit')	C	same as above
Description	Bus hardware for PRL4 panelboards; mounts two K-frame breakers (400 A max) (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two K-frame breakers (400 A max) (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4KDT ('OEM Item KPRL4KDT Is Provided as PCS Brand Aftermarket Kit') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Aftermarket / reproduction	Seller identifies maker/brand as 'PCS' aftermarket kit (seller claim; PCS not further identified)	C	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00018	BPRLLDCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRLLDCH (seller cross-ref to EAT KPRL4LD)

OEM part number	BPRLLDCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4LD [equivalent] (seller cross-reference: 'Kit # LA4K replaces OEM KPRL4LD')	C	same as above
	LA4K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for PRL4, PRL4A, PM4 panelboards; mounts one LD, HLD, LC, LA, HLA breaker (600 A max) (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one LD, HLD, LC, LA, HLA breaker (600 A max) (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4LD ('Kit # LA4K replaces OEM KPRL4LD') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PRL4, CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00019	BPRLMDCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRLMDCH (seller cross-ref to EAT KPRL4MD)

OEM part number	BPRLMDCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4MD [equivalent] (seller cross-reference: 'Kit # MD4K replaces OEM KPRL4MD')	C	same as above
	MD4K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for PRL4, PRL4A, PM4 panelboards; mounts one MDL, HMDL, MA, HMA, MC, HMC breaker (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one MDL, HMDL, MA, HMA, MC, HMC breaker (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4MD ('Kit # MD4K replaces OEM KPRL4MD') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PRL4, CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00020	BPRLNDCH	Breaker King (aftermarket/PCS-brand kit per seller)	breaker-mounting-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BPRLNDCH (seller cross-ref to EAT KPRL4ND)

OEM part number	BPRLNDCH (Breaker King catalog/model number)	C	S626 distributor
Alternate / superseded numbers	KPRL4ND [equivalent] (seller cross-reference: 'Kit # ND4K replaces OEM KPRL4ND')	C	same as above
	ND4K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for PRL4, PRL4A, PM4 panelboards; mounts one NB, HNB, NC, HNC, ND, HND breaker (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one NB, HNB, NC, HNC, ND, HND breaker (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'EATON/Cutler Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KPRL4ND ('Kit # ND4K replaces OEM KPRL4ND') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: PRL4, CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-EAT-00308	KPRL4CA	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4CA (CA/CAH/HCA 2-pole (2X) or 3-pole (3X))

OEM part number	KPRL4CA	A	S1, S17, S251 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887462	A	S251 alias; skuPage.KPRL4CA (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for CA/CAH/HCA 2-pole (2X) or 3-pole (3X)	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for ca, cah, hca breakers, three-phase, three-pole, 225a (Eaton web product description)	A	S251 skuPage.KPRL4CA (General/Product specifications); oem_spec
Application	branch	A	S17 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin (2-pole: 36 in min box)	A	S1 pp.32-33 notes b/c/d; oem_spec

Breaker compatibility	CA/CAH/HCA 2-pole (2X) or 3-pole (3X)	A	S1 s1 pp.32-33; oem_spec
	CA/CAH/HCA	A	S17 pp. 32-33; oem_spec
	CA, CAH, HCA breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4CA (General/Product specifications); oem_spec
Poles	2, 3	A	S17 pp. 32-33; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4CA (General/Product specifications); oem_spec
Current rating	225 A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4CA (General/Product specifications); oem_spec
Dimensions	Space required 2X/3X (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	2.75 in (2P, 2X) or 4.13 in (3P, 3X) = 2X/3X; twin mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	S251 skuPage.KPRL4CA (General/Product specifications); oem_spec
Aftermarket / reproduction	Breaker King offers BPRLCACH (kit # CA4K) as a replacement ('Kit # CA4K replaces OEM KPRL4CA'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4CA (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 2 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, CHA-PM4 · Breakers: CA/CAH/HCA 225 A frame, CA		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00322	KPRL4CKD	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4CKD (100% rated CKD/CHKD/CKDC 3-pole)

OEM part number	KPRL4CKD	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887479	A	S251 alias; skuPage.KPRL4CKD (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for 100% rated CKD/CHKD/CKDC 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, prl4 connector kit (Eaton web product description)	A	S251 skuPage.KPRL4CKD (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference

Installation location	Mounting: Single; 44 in box; density-rated bus required	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	100% rated CKD/CHKD/CKDC 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	CKD, CHKD (100% rated)	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4CKD (General/Product specifications); oem_spec
Current rating	400A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 5.50 in (139.7 mm) = 4X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S17 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Installation constraint	44.00 in box width; requires density rated bus in existing chassis	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL4CKD (General/Product specifications); oem_spec
Installation requirements	Kit includes copper connectors; mounting brackets; covers; hardware an instructions for mounting breaker(s). Breakers are not included. Requires density rated bus in existing panel chassis. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics weight 5 lb (dimension attributes are placeholders 0.01 in/0.01 in/0.01 in) (Placeholder dimensions - do not use)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), KD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00324	KPRL4CND	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4CND (100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole)

OEM part number	KPRL4CND	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887493	A	S251 alias; skuPage.KPRL4CND (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for 100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, prl4 connector kit, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL4CND (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference

Installation location	Mounting: Single; 44 in box; density-rated bus required	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	CND, CHND (100% rated)	A	S16 p. 24 Table 37; oem_spec
	CND, CHND breakers breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4CND (General/Product specifications); oem_spec
Poles	3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4CND (General/Product specifications); oem_spec
Current rating	1200A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4CND (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S17 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Installation constraint	44.00 in box width; requires density rated bus	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL4CND (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 44-inch box width required. Requires density rated bus in existing panel chassis. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 5 in, width 3 in, weight 7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), ND		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00329	KPRL4ED	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)

OEM part number	KPRL4ED	A	S2, S3, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	UPC 782114798195	A	S251 alias; skuPage.KPRL4ED (General/Product specifications); oem_spec
	KPRL4X32 (Same breaker frames/space listed under KPRL4X32 in May 2022 RP01400001E while KPRL4ED is no longer listed for them; supersession inferred, not stated)	C	S16, S17 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for ED, EDH, EDC 3-pole	A	S2, S3 oem_spec

	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, deadfront cover, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL4ED (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	ED, EDH, EDC 3-pole	A	S2, S3 s2 p.28; oem_spec
	ED, EDH, EDC	A	S16 p. 24 Table 37; oem_spec
	Two-pole ED, EDH, EDC breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4ED (General/Product specifications); oem_spec
Poles	3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4ED (General/Product specifications); oem_spec
Current rating	225 A	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL4ED (General/Product specifications); oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X32)	C	S16, S17 inference
Replacement / successor	KPRL4X32 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Aftermarket / reproduction	Breaker King offers BPRLEDCH (kit # ED4K) as a replacement ('Kit # ED4K replaces OEM KPRL4ED'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
	Breaker King offers BPRL4BEDCH (kit # ED4BK) as a replacement ('Kit #ED4BK replaces OEM KPRL4ED'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	same as above
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL4ED (General/Product specifications); oem_spec
Installation requirements	Order breakers separately when ordering connector kit. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 3.44 in, height 3 in, width 10.4 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, CHA-PM4 · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00327	**KPRL4ED2**	Cutler-Hammer	breaker-mounting-kit	**IN FEB 2009 AND OCT 20**

PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)

OEM part number	KPRL4ED2	A	S2, S3, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	UPC 782114858820	A	S251 alias; skuPage.KPRL4ED2 (General/Product specifications); oem_spec
	KPRL4X22 (Same breaker frames/space listed under KPRL4X22 in May 2022 RP01400001E while KPRL4ED2 is no longer listed for them; supersession inferred, not stated)	C	S16, S17 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for ED, EDH, EDC 2-pole	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, phase connectors, hardware and instructions, deadfront cover (Eaton web product description)	A	S251 skuPage.KPRL4ED2 (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	ED, EDH, EDC 2-pole	A	S2, S3 s2 p.28; oem_spec
	ED, EDH, EDC	A	S16 p. 24 Table 37; oem_spec
	Three-pole ED, EDH, EDC breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4ED2 (General/Product specifications); oem_spec
Poles	2	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4ED2 (General/Product specifications); oem_spec
Current rating	225 A	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S251 skuPage.KPRL4ED2 (General/Product specifications); oem_spec
Dimensions	2X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X22)	C	S16, S17 inference
Replacement / successor	KPRL4X22 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4ED2 (General/Product specifications); oem_spec
Installation requirements	Order breakers separately when ordering connector kit. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00311	KPRL4FBP	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4FBP (FCL, FB-P, FD/LFD 3-pole)

OEM part number	KPRL4FBP	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887509	A	S251 alias; skuPage.KPRL4FBP (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for FCL, FB-P, FD/LFD 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, for fcl, fb-p, fd/lfd breakers, 3-phase, 3-pole, 100a (Eaton web product description)	A	S251 skuPage.KPRL4FBP (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	FCL, FB-P, FD/LFD 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	FCL, FB-P, FD/LFD	A	S16 p. 24 Table 37; oem_spec
	FCL, FB-P, FD/LFD breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4FBP (General/Product specifications); oem_spec
Poles	3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4FBP (General/Product specifications); oem_spec
Current rating	100A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4FBP (General/Product specifications); oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S17 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4FBP (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), TRI-PAC integrally fused (FB-P, LA-P, NB-P), Current-limiting FCL / LCL (and FDB+LFB), FD, Tri-Pac		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00328	KPRL4FD	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)

OEM part number	KPRL4FD	A	S2, S3, S4, S10, S16, S251 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	UPC 782114795941	A	S251 alias; skuPage.KPRL4FD (General/Product specifications); oem_spec
	KPRL4X32 (Same breaker frames/space listed under KPRL4X32 in May 2022 RP01400001E while KPRL4FD is no longer listed for them; supersession inferred, not stated)	C	S16, S17 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for EHD, FD, FDB, HFD, FDC 3-pole, 225 A (single- and twin-mount per 2011 supplement)	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for ehd, fd, fdb, hfd, fdc breakers, three-phase, three-pole, 225a (Eaton web product description)	A	S251 skuPage.KPRL4FD (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 3-pole, 225 A (single- and twin-mount per 2011 supplement)	A	S2, S3, S4 s2 p.28; oem_spec
	EHD, FD, FDB, HFD, FDC	A	S16 p. 24 Table 37; oem_spec
	EHD, FD, FDB, HFD, FDC breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4FD (General/Product specifications); oem_spec
Poles	3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4FD (General/Product specifications); oem_spec
Current rating	225 A	A	S4, S251 p.9 Table 15; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4FD (General/Product specifications); oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X32)	C	S16, S17 inference
Replacement / successor	KPRL4X32 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Aftermarket / reproduction	Still stocked by Elliott Electric (UPC 782114795941, UL 67, 'PRL4 Conn Kit Twin MTD 3P E/F-FRM BKR')	C	S10 distributor
	Distributors list as 3P twin mount 225 A for EHD/FD/FDB/HFD/FDC; Elliott Electric marks item inactive	C	S25 distributor

	Breaker King offers BPRLFDCH as a replacement ('OEM Item KPRL4FD Is ... (truncated on listing)'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
	Breaker King offers BPRL4BFDCH (kit # FD4BK) as a replacement ('Kit # FD4BK replaces OEM KPRL4FD'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	same as above
	Superbreakers sells 'Eaton/Cutler-Hammer KPRL4FD Equivalent Twin Mount Mounting Hardware': 'Cutler-Hammer Equivalent Circuit Breaker Mounting Hardware ... for direct replacement ... PRL4A and PRL4B bolt-on panel boards ... comes with all associated hardware including panel cover and screws ... in stock new' (seller claim; 'equivalent' = non-OEM per seller wording; no listing statement)	C	S445 distributor
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL4FD (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, CHA-PM4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00325	KPRL4FD1	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)

OEM part number	KPRL4FD1	A	S2, S3, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	UPC 782114887516	A	S251 alias; skuPage.KPRL4FD1 (General/Product specifications); oem_spec
	KPRL4X12 (Same breaker frames/space listed under KPRL4X12 in May 2022 RP01400001E while KPRL4FD1 is no longer listed for them; supersession inferred, not stated)	C	S16, S17 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for EHD, FD, HFD 1-pole (two sets twin-mounted 1-pole)	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for ehd, fd, hfd, three-phase, three-pole, 225a (Eaton web product description)	A	S251 skuPage.KPRL4FD1 (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, HFD 1-pole (two sets twin-mounted 1-pole)	A	S2, S3 s2 p.28; oem_spec
	EHD, FD, HFD	A	S16 p. 24 Table 37; oem_spec
	EHD, FD, HFD breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4FD1 (General/Product specifications); oem_spec
Poles	1 (two sets of twin-mounted single-pole)	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4FD1 (General/Product specifications); oem_spec
Current rating	225 A	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec

	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4FD1 (General/Product specifications); oem_spec
Dimensions	2X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X12)	C	S16, S17 inference
Replacement / successor	KPRL4X12 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL4FD1 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. Two sets of twin mounted 1-pole breakers. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00326	KPRL4FD2	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)

OEM part number	KPRL4FD2	A	S2, S3, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	UPC 782114887523	A	S251 alias; skuPage.KPRL4FD2 (General/Product specifications); oem_spec
	KPRL4X22 (Same breaker frames/space listed under KPRL4X22 in May 2022 RP01400001E while KPRL4FD2 is no longer listed for them; supersession inferred, not stated)	C	S16, S17 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for EHD, FD, FDB, HFD, FDC 2-pole	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for two-pole ehd, fd, fdb, hfd, fdc breakers, three-phase, three-pole, 225a (Eaton web product description)	A	S251 skuPage.KPRL4FD2 (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 2-pole	A	S2, S3 s2 p.28; oem_spec
	EHD, FD, FDB, HFD, FDC	A	S16 p. 24 Table 37; oem_spec
	Two-pole EHD, FD, FDB, HFD, FDC breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4FD2 (General/Product specifications); oem_spec
Poles	2	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4FD2 (General/Product specifications); oem_spec

Current rating	225 A	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4FD2 (General/Product specifications); oem_spec
Dimensions	2X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X22)	C	S16, S17 inference
Replacement / successor	KPRL4X22 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4FD2 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00307	KPRL4FDCL	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4FDCL (FD current limiter, 3-pole)

OEM part number	KPRL4FDCL	A	S1, S17 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for FD current limiter, 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single only	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	FD current limiter, 3-pole	A	S1 s1 pp.32-33; oem_spec
	FD current limiter (single mounting only)	A	S17 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	4.13 in (104.9 mm) = 3X; single mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Current-limiting FCL / LCL (and FDB+LFB), FD		

Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00309	KPRL4JDS	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4JDS (JD, JDB, HJD, JDC 2-/3-pole)

OEM part number	KPRL4JDS	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114796030	A	S251 alias; skuPage.KPRL4JDS (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for JD, JDB, HJD, JDC 2-/3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for single jd, jdb, hjd, jdc breakers, three-phase, three-pole, 250a (Eaton web product description)	A	S251 skuPage.KPRL4JDS (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	JD, JDB, HJD, JDC 2-/3-pole	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	JD, JDB, HJD, JDC	A	S16 p. 24 Table 37; oem_spec
	Single JD, JDB, HJD, JDC breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4JDS (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4JDS (General/Product specifications); oem_spec
Current rating	250 A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4JDS (General/Product specifications); oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S17 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Aftermarket / reproduction	Breaker King offers BPRLJDSCH (kit # JDS4K) as a replacement ('Kit # JDS4K replaces OEM KPRL4JDS'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
	Breaker King offers BPRL4BJDSCH (kit # JDS4BK) as a replacement ('Kit # JDS4BK replaces OEM KRPL4JDS (sic; read as KPRL4JDS)'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	same as above

Listing / approvals	UL Listed	A	S251 skuPage.KPRL4JDS (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, CHA-PM4 · Breakers: Series C J-frame (JD/JDB/HJD/JDC), JD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00310 KPRL4JDT Cutler-Hammer breaker-mounting-kit LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4JDT (JD, JDB, HJD, JDC 2-/3-pole)

OEM part number	KPRL4JDT	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114796115	A	S251 alias; skuPage.KPRL4JDT (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for JD, JDB, HJD, JDC 2-/3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for twin jd, jdb, hjd, jdc breakers, three-phase, three-pole, 250 A (Eaton web product description)	A	S251 skuPage.KPRL4JDT (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	JD, JDB, HJD, JDC 2-/3-pole	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	JD, JDB, HJD, JDC	A	S16 p. 24 Table 37; oem_spec
	Twin JD, JDB, HJD, JDC breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4JDT (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4JDT (General/Product specifications); oem_spec
Current rating	250 A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4JDT (General/Product specifications); oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec

	listed in both 2017 and May 2022 RP01400001E	A	S16, S17 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Aftermarket / reproduction	Breaker King offers BPRLJDTCH (kit # JD4K) as a replacement ('Kit # JD4K replaces OEM KPRL4JDT'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
Installation constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4JDT (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 36-inch minimum box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, CHA-PM4 · Breakers: Series C J-frame (JD/JDB/HJD/JDC), JD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00312 KPRL4KDS Cutler-Hammer breaker-mounting-kit LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4KDS (DK, KD, KDB, HKD, KDC 2-/3-pole)

OEM part number	KPRL4KDS	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114795996	A	S19, S251 alias; spec sheet; oem_spec
Description	PRL4 breaker connector kit for DK, KD, KDB, HKD, KDC 2-/3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for single dk, kd, kdb, hkd, kdc breakers, three-phase, three-pole, 400a (Eaton web product description)	A	S251 skuPage.KPRL4KDS (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	DK, KD, KDB, HKD, KDC 2-/3-pole	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	DK, KD, KDB, HKD, KDC	A	S16 p. 24 Table 37; oem_spec
	Single DK, KD, KDB, HKD, KDC breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4KDS (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4KDS (General/Product specifications); oem_spec
Current rating	400A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec

	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4KDS (General/Product specifications); oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Spec sheet: 25.5 in L x 9.3 in W x 3.2 in H, 9.25 lb; occupies 5.50 in (4X)	A	S19, S16 spec sheet; p. 24; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S17 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Aftermarket / reproduction	Sold as surplus/reconditioned on eBay titled 'POW-R-LINE C' single-mount kit 400A 3P	C	S24 surplus_listing
	Breaker King offers BPRLKDSCH (kit # KDS4K) as a replacement ('Kit # KDS4K replaces OEM KPRL4KDS'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
	Breaker King offers BPRL4BKDSCH (kit # KDS4BK) as a replacement ('Kit # KDS4BK replaces OEM KPRL4KDS'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	same as above
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4KDS (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 25.5 in, height 3.2 in, width 9.3 in, weight 9.25 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, CHA-PM4 · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), KD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00313	KPRL4KDT	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4KDT (DK, KD, KDB, HKD, KDC 2-/3-pole)

OEM part number	KPRL4KDT	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114796412	A	S20, S251 alias; spec sheet; oem_spec
Description	PRL4 breaker connector kit for DK, KD, KDB, HKD, KDC 2-/3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton panelboard connector kit copper connectors, mounting brackets, covers, hardware and instructions, for twin dk, kd, kdb, hkd, kdc breakers, three-phase, three-pole, 400a (Eaton web product description)	A	S251 skuPage.KPRL4KDT (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin; 44 in box required	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	DK, KD, KDB, HKD, KDC 2-/3-pole	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	DK, KD, KDB, HKD, KDC	A	S16 p. 24 Table 37; oem_spec
	Twin DK, KD, KDB, HKD, KDC breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4KDT (General/Product specifications); oem_spec

Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4KDT (General/Product specifications); oem_spec
Current rating	400A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4KDT (General/Product specifications); oem_spec
Finish / plating	Spec sheet weight 9.85 lb; certification UL 67	B	S20 spec sheet; oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 5.50 in (139.7 mm) = 4X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S17 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Aftermarket / reproduction	Breaker King offers BPRLKDTCH as a replacement ('OEM Item KPRL4KDT Is Provided as PCS Brand Aftermarket Kit'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
Installation constraint	44.00 in box width required	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL4KDT (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 44-inch box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3.2 in, width 2 in, weight 9.85 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), KD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00317	KPRL4LAP	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4LAP (LA-P 3-pole)

OEM part number	KPRL4LAP	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887530	A	S251 alias; skuPage.KPRL4LAP (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for LA-P 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, , hardware and instructions, covers (Eaton web product description)	A	S251 skuPage.KPRL4LAP (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec

	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LA-P 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	LA-P	A	S16 p. 24 Table 37; oem_spec
	LA-P breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4LAP (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4LAP (General/Product specifications); oem_spec
Current rating	400A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4LAP (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S17 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Installation constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4LAP (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 36-inch minimum box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 2 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Tri-Pac		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00314	KPRL4LC	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])

OEM part number	KPRL4LC	A	S1, S17 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114796191	A	S251 alias; skuPage.KPRL4LC (General/Product specifications); oem_spec
	KPRL4LD (earlier number for same frames/space; supersession inferred)	C	S16, S17 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4 breaker connector kit for LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; also 100% rated CLD/CHLD/CLDC and LCC/HLCC (density-rated bus required for 100%)	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec

	Eaton, panelboard connector kit, for ld, ldb, hld, ldc, lc, hlc, lcy breakers, three-phase, three-pole, 600a (Eaton web product description)	A	S251 skuPage.KPRL4LC (General/Product specifications); oem_spec
Application	branch	A	S17 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box (44 in for 100% rated)	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; also 100% rated CLD/CHLD/CLDC and LCC/HLCC (density-rated bus required for 100%)	A	S1 s1 pp.32-33; oem_spec
	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; 100%: CLD/CHLD/CLDC, LCC/HLCC	A	S17 pp. 32-33; oem_spec
	LD, LDB, HLD, LDC, LC, HLC, LCY breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4LC (General/Product specifications); oem_spec
Poles	3	A	S17 pp. 32-33; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4LC (General/Product specifications); oem_spec
Current rating	600A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL4LC (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 2 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), LA, LC, LD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00318	KPRL4LC	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4LCL (LCL 3-pole)

OEM part number	KPRL4LCL	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887547	A	S251 alias; skuPage.KPRL4LCL (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for LCL 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton PRL4 CONNECTOR KIT FOR LCL BREAKERS (Eaton web product description)	A	S251 skuPage.KPRL4LCL (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference

Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LCL 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	LCL	A	S16 p. 24 Table 37; oem_spec
	LCL breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4LCL (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4LCL (General/Product specifications); oem_spec
Current rating	600A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4LCL (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S17 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Installation constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4LCL (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 36-inch minimum box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 2 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00330 KPRL4LD Cutler-Hammer breaker-mounting-kit IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)

OEM part number	KPRL4LD	A	S2, S3, S4, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	UPC 782114858813	A	S251 alias; skuPage.KPRL4LD (General/Product specifications); oem_spec
	KPRL4LC (Same breaker frames/space listed under KPRL4LC in May 2022 RP01400001E while KPRL4LD is no longer listed for them; supersession inferred, not stated)	C	S16, S17 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for LD, LDB, HLD, LDC, CLD, LC 2-/3-pole, 600 A	A	S2, S3 oem_spec

	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton PB connector kit with copper connectors, mounting brackets, covers, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL4LD (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
Installation location	Mounting: Single; 36 in min box	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LD, LDB, HLD, LDC, CLD, LC 2-/3-pole, 600 A	A	S2, S3, S4 s2 p.28; oem_spec
	LD, LDB, HLD, LDC, CLD, LC	A	S16 p. 24 Table 37; oem_spec
	LD, LDB, HLD, LDC, CLD, LC breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4LD (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4LD (General/Product specifications); oem_spec
Current rating	600A	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4LD (General/Product specifications); oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4LC)	C	S16, S17 inference
Replacement / successor	KPRL4LC covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Aftermarket / reproduction	Breaker King offers BPRLLDCH (kit # LA4K) as a replacement ('Kit # LA4K replaces OEM KPRL4LD'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
Installation constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL4LD (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 36-inch minimum box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 2 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, CHA-PM4 · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), LD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-01237	KPRL4LDS	Eaton lineage	breaker-mounting-kit	STATUS UNKNOWN

PRL4B column breaker connector kit KPRL4LDS (L-frame single) - per aftermarket seller cross-reference

OEM part number	KPRL4LDS (OEM number known only from aftermarket seller cross-reference)	C	S626 distributor
Description	Bus hardware for PRL4B column panelboards in 24-36 in wide enclosures; mounts one L-frame breaker (600 A max) (inferred from aftermarket seller's description of its replacement)	C	same as above
Aftermarket / reproduction	Breaker King offers BPRL4BLDSCH (kit # LDS4BK) as a replacement ('Kit # LDS4BK replaces OEM KPRL4LDS'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-EAT-00315	KPRL4LG	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4LG (LHH 3-pole)

OEM part number	KPRL4LG	A	S1, S17 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782116654130	A	S251 alias; skuPage.KPRL4LG (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for LHH 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec
	Eaton panelboard connector kit, prl4 connector kit for lge, lgh breakers (Eaton web product description)	A	S251 skuPage.KPRL4LG (General/Product specifications); oem_spec
Application	branch	A	S17 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	LHH 3-pole	A	S1 s1 pp.32-33; oem_spec
	LHH	A	S17 pp. 32-33; oem_spec
	LGE, LGH breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4LG (General/Product specifications); oem_spec
Poles	3	A	S17 pp. 32-33; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4LG (General/Product specifications); oem_spec
Current rating	600A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	5.50 in (139.7 mm) = 4X; single mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL4LG (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above

Cross-links	Families: PRL4, PRL4X · Breakers: Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00316	KPRL4MC	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])

OEM part number	KPRL4MC	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887554	A	S251 alias; skuPage.KPRL4MC (General/Product specifications); oem_spec
	KPRL4X34 (Same breaker frames/space listed under KPRL4X34 in May 2022 RP01400001E while KPRL4MC is no longer listed for them; supersession inferred, not stated)	C	S16, S17 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for MDS/MC/MCY/HMC [MA/HMA]; 100% MCC/HMCC, MDSC	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, cover with hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL4MC (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	MDS/MC/MCY/HMC [MA/HMA]; 100% MCC/HMCC, MDSC	A	S1, S2, S3 s1 pp.32-33; oem_spec
	MDL, HMDL	A	S16 p. 24 Table 37; oem_spec
	MDL, HMDL breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4MC (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4MC (General/Product specifications); oem_spec
Current rating	800A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4MC (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X34)	C	S16, S17 inference
Installation constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec

Listing / approvals	UL Listed UL 67	A	S251 skuPage.KPRL4MC (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 36-inch minimum box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 5 in, width 3 in, weight 7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), MDL		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00323 KPRL4MD Cutler-Hammer breaker-mounting-kit LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4MD (100% rated CMDL/CHMDL 3-pole (2021))

OEM part number	KPRL4MD	A	S1, S4, S17 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for 100% rated CMDL/CHMDL 3-pole (2021); 3-pole M-frame 800 A (2011)	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 44 in box; density-rated bus required	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	100% rated CMDL/CHMDL 3-pole (2021); 3-pole M-frame 800 A (2011)	A	S1, S4 s1 pp.32-33; oem_spec
	CMDL/CHMDL (100% rated; density rated bus)	A	S17 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
Aftermarket / reproduction	Breaker King offers BPRLMDCH (kit # MD4K) as a replacement ('Kit # MD4K replaces OEM KPRL4MD'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
Cross-links	Families: PRL4, PRL4X, CHA-PM4 · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), MDL		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*2011 supplement lists KPRL4MD as standard 3-pole M-frame 800 A kit; 2021 lists it only for 100% rated CMDL/CHMDL (MDL/HMDL now KPRL4X34).*		

EDH-EAT-00319 KPRL4NBP Cutler-Hammer breaker-mounting-kit LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4NBP (NB-P 3-pole)

OEM part number	KPRL4NBP	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887561	A	S251 alias; skuPage.KPRL4NBP (General/Product specifications); oem_spec

Description	PRL4 breaker connector kit for NB-P 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton PRL4 CONNECTOR KIT FOR SINGLE MTD NBP BREAKER (Eaton web product description)	A	S251 skuPage.KPRL4NBP (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	NB-P 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	NB-P	A	S16 p. 24 Table 37; oem_spec
	NB-P breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4NBP (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4NBP (General/Product specifications); oem_spec
Current rating	800A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4NBP (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S17 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Installation constraint	44.00 in box width required	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4NBP (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 44-inch box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 5 in, width 3 in, weight 7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Tri-Pac		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00320	**KPRL4NC**	Cutler-Hammer	breaker-mounting-kit	**LISTED AS STOCK RENEWA**

PRL4/PRL4X breaker connector kit KPRL4NC (NC/NCY/HNC [NB/HNB] 3-pole)

OEM part number	KPRL4NC	A	S1, S17 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for NC/NCY/HNC [NB/HNB] 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	NC/NCY/HNC [NB/HNB] 3-pole	A	S1 s1 pp.32-33; oem_spec
	NC/NCY/HNC [NB/HNB]	A	S17 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), NB, NC		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00321	KPRL4ND	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))

OEM part number	KPRL4ND	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114796078	A	S251 alias; skuPage.KPRL4ND (General/Product specifications); oem_spec
	KPRL4X35 (Same breaker frames/space listed under KPRL4X35 in May 2022 RP01400001E while KPRL4ND is no longer listed for them; supersession inferred, not stated)	C	S16, S17 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for NHH 3-pole (2021); ND/HND 2-/3-pole (2009/2011)	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, prl4 connector kit for nd,hnd breakers (Eaton web product description)	A	S251 skuPage.KPRL4ND (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S18 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	NHH 3-pole (2021); ND/HND 2-/3-pole (2009/2011)	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	ND, HND	A	S16 p. 24 Table 37; oem_spec

	ND, HND breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.KPRL4ND (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S251 skuPage.KPRL4ND (General/Product specifications); oem_spec
Current rating	1200A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4ND (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X35)	C	S16, S17 inference
Aftermarket / reproduction	Breaker King offers BPRLNDCH (kit # ND4K) as a replacement ('Kit # ND4K replaces OEM KPRL4ND'), labelled 'EATON/Cutler Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S626 distributor
Installation constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4ND (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 36-inch minimum box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 5 in, width 3 in, weight 7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, CHA-PM4 · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), ND		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00299 **KPRL4X12** Cutler-Hammer breaker-mounting-kit **LISTED AS STOCK RENEWA**

PRL4/PRL4X breaker connector kit KPRL4X12 (PDG2 1-pole (two sets of twin-mounted 1-pole))

OEM part number	KPRL4X12	A	S1, S17 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4FD1 (earlier number for same frames/space; supersession inferred)	C	S16, S17 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4 breaker connector kit for PDG2 1-pole (two sets of twin-mounted 1-pole); EHD/FDB/FD/HFD/FDC 1-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG2 1-pole (two sets of twin-mounted 1-pole); EHD/FDB/FD/HFD/FDC 1-pole	A	S1 s1 pp.32-33; oem_spec
	EHD/FDB/FD/HFD/FDC (PD2)	A	S17 pp. 32-33; oem_spec

Poles	1 (two sets of twin-mounted single-pole)	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
Dimensions	Space required 2X (2.75 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	2.75 in (69.9 mm) = 2X; twin mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Power Defense frame 2 (PDG2 / PDD2), EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00300	KPRL4X22	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)

OEM part number	KPRL4X22	A	S1, S17 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242572	A	S251 alias; skuPage.KPRL4X22 (General/Product specifications); oem_spec
	KPRL4FD2 (earlier number for same frames/space; supersession inferred)	C	S16, S17 supersedes; 2017 Table 37 vs 2022 Table 47; inference
	KPRL4ED2 [supersedes] (earlier number for same frames/space; supersession inferred)	C	same as above
Description	PRL4 breaker connector kit for PDG2 2-pole; EHD/FDB/FD/HFD/FDC/ED/EDH/EDC 2-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, prl4x conn kit twn mt 225a 2p 1ph pd2 bk (Eaton web product description)	A	S251 skuPage.KPRL4X22 (General/Product specifications); oem_spec
Application	branch	A	S17 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG2 2-pole; EHD/FDB/FD/HFD/FDC/ED/EDH/EDC 2-pole	A	S1 s1 pp.32-33; oem_spec
	EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (PD2)	A	S17 pp. 32-33; oem_spec
Poles	2	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4X22 (General/Product specifications); oem_spec
Dimensions	Space required 2X (2.75 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	2.75 in (69.9 mm) = 2X; twin mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec

Listing / approvals	UL Listed	A	S251 skuPage.KPRL4X22 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Power Defense frame 2 (PDG2 / PDD2), EHD, FD, ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00301 KPRL4X32 Cutler-Hammer breaker-mounting-kit LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)

OEM part number	KPRL4X32	A	S1, S17 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242589	A	S251 alias; skuPage.KPRL4X32 (General/Product specifications); oem_spec
	KPRL4FD (earlier number for same frames/space; supersession inferred)	C	S16, S17 supersedes; 2017 Table 37 vs 2022 Table 47; inference
	KPRL4ED [supersedes] (earlier number for same frames/space; supersession inferred)	C	same as above
Description	PRL4 breaker connector kit for PDG2 3-pole; ED/EDH/EDC/FDE/HFDE/FDCE and ED/EDH/EDC/EDB/EDS 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, hardware and instructions, covers (Eaton web product description)	A	S251 skuPage.KPRL4X32 (General/Product specifications); oem_spec
Application	branch	A	S17 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG2 3-pole; ED/EDH/EDC/FDE/HFDE/FDCE and ED/EDH/EDC/EDB/EDS 3-pole	A	S1 s1 pp.32-33; oem_spec
	ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDCE (PD2)	A	S17 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4X32 (General/Product specifications); oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	4.13 in (104.9 mm) = 3X; twin mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4X32 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above

Package data (not part dims)	Eaton logistics attributes: length/depth 25.7 in, height 4.6 in, width 9.3 in, weight 7.35 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Power Defense frame 2 (PDG2 / PDD2), FD, ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00302 KPRL4X334S Cutler-Hammer breaker-mounting-kit LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X334S (PDG3 400 A frame, 3-pole, single mounting)

OEM part number	KPRL4X334S	A	S1, S17 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242596	A	S251 alias; skuPage.KPRL4X334S (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for PDG3 400 A frame, 3-pole, single mounting	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec
	Eaton, panelboard connector kit, copper connectors, hardware and instructions mounting brackets, covers (Eaton web product description)	A	S251 skuPage.KPRL4X334S (General/Product specifications); oem_spec
Application	branch	A	S17 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG3 400 A frame, 3-pole, single mounting	A	S1 s1 pp.32-33; oem_spec
	PD3 400 A frame	A	S17 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4X334S (General/Product specifications); oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	5.50 in (139.7 mm) = 4X; single mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4X334S (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 25.8 in, height 4.7 in, width 9.4 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00303 KPRL4X334T Cutler-Hammer breaker-mounting-kit LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X334T (PDG3 400 A frame, 3-pole, twin mounting)

OEM part number	KPRL4X334T	A	S1, S17 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242602	A	S251 alias; skuPage.KPRL4X334T (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for PDG3 400 A frame, 3-pole, twin mounting	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec
	Eaton, panelboard connector kit, hardware and instructions, copper connectors, mounting brackets, covers (Eaton web product description)	A	S251 skuPage.KPRL4X334T (General/Product specifications); oem_spec
Application	branch	A	S17 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin; 44 in box required	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG3 400 A frame, 3-pole, twin mounting	A	S1 s1 pp.32-33; oem_spec
	PD3 400 A frame	A	S17 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4X334T (General/Product specifications); oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	5.50 in (139.7 mm) = 4X; twin mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4X334T (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00304	KPRL4X336	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X336 (PDG3 600 A frame)

OEM part number	KPRL4X336	A	S1, S17 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242619	A	S251 alias; skuPage.KPRL4X336 (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for PDG3 600 A frame; LGE/LGS/LGH/LGC/LGU, 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec

	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers (Eaton web product description)	A	S251 skuPage.KPRL4X336 (General/Product specifications); oem_spec
Application	branch	A	S17 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG3 600 A frame; LGE/LGS/LGH/LGC/LGU, 3-pole	A	S1 s1 pp.32-33; oem_spec
	PD3 600 A frame; LGE/LGS/LGH/LGC/LGU	A	S17 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4X336 (General/Product specifications); oem_spec
Dimensions	Space required 4X (PDG3) / 6X (LG) per table (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	5.50 in (139.7 mm) per Table 46 (Table 47 prints 8.25 in / 6X for LG frames) = 4X; single mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4X336 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 4.5 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Table 46 gives 4X for PDG3 600 A but Table 47 gives 6X for LG-frame with the same kit number - confirm space requirement.*		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00305	KPRL4X34	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)

OEM part number	KPRL4X34	A	S1, S17 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242626	A	S251 alias; skuPage.KPRL4X34 (General/Product specifications); oem_spec
	KPRL4MC (earlier number for same frames/space; supersession inferred)	C	S16, S17 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4 breaker connector kit for PDG4; MDL/HMDL 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec
	Eaton, panelboard connector kit, copper connectors, covers, mounting brackets, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL4X34 (General/Product specifications); oem_spec
Application	branch	A	S17 p. 32; oem_spec

	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG4; MDL/HMDL 3-pole	A	S1 s1 pp.32-33; oem_spec
	PD4; MDL/HMDL	A	S17 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4X34 (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4X34 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5), MDL		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00306 **KPRL4X35** Cutler-Hammer breaker-mounting-kit **LISTED AS STOCK RENEWA**

PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)

OEM part number	KPRL4X35	A	S1, S17 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242633	A	S251 alias; skuPage.KPRL4X35 (General/Product specifications); oem_spec
	KPRL4ND (earlier number for same frames/space; supersession inferred)	C	S16, S17 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4 breaker connector kit for PDG5; ND/HND/NDC/NGS/NGH/NGC 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S17 p. 32; oem_spec
	Eaton, panelboard connector kit, covers, copper connectors, mounting brackets, hardware and instructions (Eaton web product description)	A	S251 skuPage.KPRL4X35 (General/Product specifications); oem_spec
Application	branch	A	S17 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG5; ND/HND/NDC/NGS/NGH/NGC 3-pole	A	S1 s1 pp.32-33; oem_spec
	PD5; ND/HND/NDC/NGS/NGH/NGC	A	S17 pp. 32-33; oem_spec

Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S17 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S251 skuPage.KPRL4X35 (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S17 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S17 p. 33; oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPRL4X35 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5), ND		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00238	**6572C746G01**	PRL4 standard ground bus	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00238 **6572C746G01** Cutler-Hammer ground-bar **LISTED AS STOCK RENEWA**

PRL4 standard ground bus

OEM part number	6572C746G01	A	S1, S2 s1 p.33; oem_spec
Description	Copper bus with (3) 6-300 kcmil lugs plus a 24-circuit terminal bar with #14-1/0 wire range	A	same as above
Material	Copper	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01078	**8708C82G02**	PRL4 door-in-door trim mounting channel for BX2457	—	unknown
EDH-EAT-01083	**8708C82G03**	PRL4 door-in-door trim mounting channel for BX2473	—	unknown
EDH-EAT-01088	**8708C82G04**	PRL4 door-in-door trim mounting channel for BX2490	—	unknown
EDH-EAT-01093	**8708C82G05**	PRL4 door-in-door trim mounting channel for BX3673	—	unknown
EDH-EAT-01098	**8708C82G06**	PRL4 door-in-door trim mounting channel for BX3690	—	unknown
EDH-EAT-01102	**8708C82G07**	PRL4 door-in-door trim mounting channel for BX4473	—	unknown
EDH-EAT-01106	**8708C82G08**	PRL4 door-in-door trim mounting channel for BX4490	—	unknown

EDH-EAT-01078	8708C82G02	Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

PRL4 door-in-door trim mounting channel for BX2457

OEM part number	8708C82G02	A	S3, S16 oem_spec
Description	Special mounting channel required to add extra depth when a door-in-door trim (LDD2457STW/FTW) is used with standard PRL4 box BX2457 (an extra-depth box not requiring the channel is also available).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Material		

EDH-EAT-01083	8708C82G03	Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

PRL4 door-in-door trim mounting channel for BX2473

OEM part number	8708C82G03	A	S3, S16 oem_spec
Description	Special mounting channel required to add extra depth when a door-in-door trim (LDD2473STW/FTW) is used with standard PRL4 box BX2473 (an extra-depth box not requiring the channel is also available).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Material		

EDH-EAT-01088	8708C82G04	Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

PRL4 door-in-door trim mounting channel for BX2490

OEM part number	8708C82G04	A	S3, S16 oem_spec
Description	Special mounting channel required to add extra depth when a door-in-door trim (LDD2490STW/FTW) is used with standard PRL4 box BX2490 (an extra-depth box not requiring the channel is also available).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Material		

EDH-EAT-01093	8708C82G05	Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

PRL4 door-in-door trim mounting channel for BX3673

OEM part number	8708C82G05	A	S3, S16 oem_spec
Description	Special mounting channel required to add extra depth when a door-in-door trim (LDD3673STW/FTW) is used with standard PRL4 box BX3673 (an extra-depth box not requiring the channel is also available).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Material		

EDH-EAT-01098	8708C82G06	Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

PRL4 door-in-door trim mounting channel for BX3690

OEM part number	8708C82G06	A	S3, S16 oem_spec
Description	Special mounting channel required to add extra depth when a door-in-door trim (LDD3690STW/FTW) is used with standard PRL4 box BX3690 (an extra-depth box not requiring the channel is also available).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Material		

EDH-EAT-01102	8708C82G07	Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

PRL4 door-in-door trim mounting channel for BX4473

OEM part number	8708C82G07	A	S3, S16 oem_spec
Description	Special mounting channel required to add extra depth when a door-in-door trim (LDD4473STW/FTW) is used with standard PRL4 box BX4473 (an extra-depth box not requiring the channel is also available).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Material		

EDH-EAT-01106	8708C82G08	Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

PRL4 door-in-door trim mounting channel for BX4490

OEM part number	8708C82G08	A	S3, S16 oem_spec
Description	Special mounting channel required to add extra depth when a door-in-door trim (LDD4490STW/FTW) is used with standard PRL4 box BX4490 (an extra-depth box not requiring the channel is also available).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Material		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01109	**6555C20H01**	PRL4 side gutter cover 5.00 x 57.00 in	—	unknown
EDH-EAT-01110	**6555C21H01**	PRL4 side gutter cover 5.00 x 73.00 in	—	unknown
EDH-EAT-01112	**6555C22H01**	PRL4 side gutter cover 6.00 x 73.00 in	—	unknown
EDH-EAT-01113	**6555C23H01**	PRL4 side gutter cover 8.00 x 73.00 in	—	unknown
EDH-EAT-01116	**6555C24H01**	PRL4 side gutter cover 14.00 x 73.00 in	—	unknown
EDH-EAT-01111	**6555C25H01**	PRL4 side gutter cover 5.00 x 90.00 in	—	unknown
EDH-EAT-01114	**6555C26H01**	PRL4 side gutter cover 6.00 x 90.00 in	—	unknown
EDH-EAT-01115	**6555C27H01**	PRL4 side gutter cover 8.00 x 90.00 in	—	unknown
EDH-EAT-01117	**6555C28H01**	PRL4 side gutter cover 14.00 x 90.00 in	—	unknown
EDH-EAT-00298	**6574C74**	PRL4 vented cover assembly (side rails + top/bottom vented covers)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-01077	**6574C74G02**	PRL4 vented cover assembly, 24 in wide box	—	unknown
EDH-EAT-01082	**6574C74G03**	PRL4 vented cover assembly, 24 in wide box	—	unknown
EDH-EAT-01087	**6574C74G04**	PRL4 vented cover assembly, 24 in wide box	—	unknown
EDH-EAT-01092	**6574C74G05**	PRL4 vented cover assembly, 36 in wide box	—	unknown
EDH-EAT-01097	**6574C74G06**	PRL4 vented cover assembly, 36 in wide box	—	unknown

EDH-EAT-01109	6555C20H01	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 side gutter cover 5.00 x 57.00 in

OEM part number	6555C20H01	A	S3, S16 oem_spec
Description	PRL4/PRL4X side gutter cover, 5.00 x 57.00 in (left/right side) for box BX2457	A	S3, S16 p.31 Table 44; oem_spec
Dimensions	5.00 x 57.00 in (W x H)	A	S3 p.31 Table 44; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01110	6555C21H01	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 side gutter cover 5.00 x 73.00 in

OEM part number	6555C21H01	A	S3, S16 oem_spec
Description	PRL4/PRL4X side gutter cover, 5.00 x 73.00 in (left/right side) for box BX2473	A	S3, S16 p.31 Table 44; oem_spec
Dimensions	5.00 x 73.00 in (W x H)	A	S3 p.31 Table 44; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01112	6555C22H01	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 side gutter cover 6.00 x 73.00 in

OEM part number	6555C22H01	A	S3, S16 oem_spec
Description	PRL4/PRL4X side gutter cover, 6.00 x 73.00 in (left side) for box BX3673	A	S3, S16 p.31 Table 44; oem_spec
Dimensions	6.00 x 73.00 in (W x H)	A	S3 p.31 Table 44; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01113	6555C23H01	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 side gutter cover 8.00 x 73.00 in

OEM part number	6555C23H01	A	S3, S16 oem_spec
Description	PRL4/PRL4X side gutter cover, 8.00 x 73.00 in (left/right side) for box BX3673, BX4473	A	S3, S16 p.31 Table 44; oem_spec
Dimensions	8.00 x 73.00 in (W x H)	A	S3 p.31 Table 44; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01116	6555C24H01	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 side gutter cover 14.00 x 73.00 in

OEM part number	6555C24H01	A	S3, S16 oem_spec
Description	PRL4/PRL4X side gutter cover, 14.00 x 73.00 in (right side) for box BX4473	A	S3, S16 p.31 Table 44; oem_spec
Dimensions	14.00 x 73.00 in (W x H)	A	S3 p.31 Table 44; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01111	6555C25H01	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 side gutter cover 5.00 x 90.00 in

OEM part number	6555C25H01	A	S3, S16 oem_spec
Description	PRL4/PRL4X side gutter cover, 5.00 x 90.00 in (left/right side) for box BX2490	A	S3, S16 p.31 Table 44; oem_spec
Dimensions	5.00 x 90.00 in (W x H)	A	S3 p.31 Table 44; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01114	6555C26H01	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 side gutter cover 6.00 x 90.00 in

OEM part number	6555C26H01	A	S3, S16 oem_spec
Description	PRL4/PRL4X side gutter cover, 6.00 x 90.00 in (left side) for box BX3690	A	S3, S16 p.31 Table 44; oem_spec
Dimensions	6.00 x 90.00 in (W x H)	A	S3 p.31 Table 44; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01115	6555C27H01	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 side gutter cover 8.00 x 90.00 in

OEM part number	6555C27H01	A	S3, S16 oem_spec
Description	PRL4/PRL4X side gutter cover, 8.00 x 90.00 in (left/right side) for box BX3690, BX4490	A	S3, S16 p.31 Table 44; oem_spec
Dimensions	8.00 x 90.00 in (W x H)	A	S3 p.31 Table 44; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01117	6555C28H01	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 side gutter cover 14.00 x 90.00 in

OEM part number	6555C28H01	A	S3, S16 oem_spec
Description	PRL4/PRL4X side gutter cover, 14.00 x 90.00 in (right side) for box BX4490	A	S3, S16 p.31 Table 44; oem_spec
Dimensions	14.00 x 90.00 in (W x H)	A	S3 p.31 Table 44; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-00298	6574C74	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL4 vented cover assembly (side rails + top/bottom vented covers)

OEM part number	6574C74	A	S1, S2 s1 p.31 Table 44; oem_spec
Alternate / superseded numbers	BX2457 G02; BX2473 G03; BX2490 G04; BX3673/BX4473 G05; BX3690/BX4490 G06	A	S1 style_number; p.31; oem_spec
Description	Vented cover assembly: two side rails, top and bottom vented covers; device covers and blanks ordered separately; covers add 0.90 in to 10.40 in box depth (11.30 in overall)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-01077	6574C74G02	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 vented cover assembly, 24 in wide box

OEM part number	6574C74G02	A	S3, S16 oem_spec
Description	Vented cover assembly (two side rails, top and bottom vented covers) for PRL4/PRL4X boxes; device covers and blanks ordered separately. Used with: BX2457	A	S3, S16 p.31 Table 44 note b; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Material		

EDH-EAT-01082	6574C74G03	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 vented cover assembly, 24 in wide box

OEM part number	6574C74G03	A	S3, S16 oem_spec
Description	Vented cover assembly (two side rails, top and bottom vented covers) for PRL4/PRL4X boxes; device covers and blanks ordered separately. Used with: BX2473	A	S3, S16 p.31 Table 44 note b; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Material		

EDH-EAT-01087	6574C74G04	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 vented cover assembly, 24 in wide box

OEM part number	6574C74G04	A	S3, S16 oem_spec
Description	Vented cover assembly (two side rails, top and bottom vented covers) for PRL4/PRL4X boxes; device covers and blanks ordered separately. Used with: BX2490	A	S3, S16 p.31 Table 44 note b; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Material		

EDH-EAT-01092	6574C74G05	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 vented cover assembly, 36 in wide box

OEM part number	6574C74G05	A	S3, S16 oem_spec
Description	Vented cover assembly (two side rails, top and bottom vented covers) for PRL4/PRL4X boxes; device covers and blanks ordered separately. Used with: BX3673 (Additional evidence: Vented cover assembly (two side rails, top and bottom vented covers) for PRL4/PRL4X boxes; device covers and blanks ordered separately. Used with: BX4473 [A, s_rp1_2022,s_rp1_2017, p.31 Table 44 note b])	A	S3, S16 p.31 Table 44 note b; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Material		

EDH-EAT-01097	6574C74G06	Cutler-Hammer	deadfront	STATUS UNKNOWN

PRL4 vented cover assembly, 36 in wide box

OEM part number	6574C74G06	A	S3, S16 oem_spec
Description	Vented cover assembly (two side rails, top and bottom vented covers) for PRL4/PRL4X boxes; device covers and blanks ordered separately. Used with: BX3690 (Additional evidence: Vented cover assembly (two side rails, top and bottom vented covers) for PRL4/PRL4X boxes; device covers and blanks ordered separately. Used with: BX4490 [A, s_rp1_2022,s_rp1_2017, p.31 Table 44 note b])	A	S3, S16 p.31 Table 44 note b; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00294	**6554C01**	PRL4/PRL4X blank cover for 24 in wide box (1X-20X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-01128	**6554C01H01**	PRL4/PRL4X blank cover 1X, 24.00 in wide box	—	unknown
EDH-EAT-01130	**6554C01H02**	PRL4/PRL4X blank cover 2X, 24.00 in wide box	—	unknown
EDH-EAT-01132	**6554C01H03**	PRL4/PRL4X blank cover 3X, 24.00 in wide box	—	unknown
EDH-EAT-01138	**6554C01H04**	PRL4/PRL4X blank cover 6X, 24.00 in wide box	—	unknown
EDH-EAT-01140	**6554C01H05**	PRL4/PRL4X blank cover 7X, 24.00 in wide box	—	unknown
EDH-EAT-01142	**6554C01H06**	PRL4/PRL4X blank cover 9X, 24.00 in wide box	—	unknown
EDH-EAT-01144	**6554C01H07**	PRL4/PRL4X blank cover 10X, 24.00 in wide box	—	unknown
EDH-EAT-01146	**6554C01H08**	PRL4/PRL4X blank cover 11X, 24.00 in wide box	—	unknown
EDH-EAT-01148	**6554C01H09**	PRL4/PRL4X blank cover 12X, 24.00 in wide box	—	unknown
EDH-EAT-01150	**6554C01H10**	PRL4/PRL4X blank cover 13X, 24.00 in wide box	—	unknown
EDH-EAT-01152	**6554C01H11**	PRL4/PRL4X blank cover 15X, 24.00 in wide box	—	unknown
EDH-EAT-01154	**6554C01H12**	PRL4/PRL4X blank cover 20X, 24.00 in wide box	—	unknown
EDH-EAT-01134	**6554C01H13**	PRL4/PRL4X blank cover 4X, 24.00 in wide box	—	unknown
EDH-EAT-01136	**6554C01H14**	PRL4/PRL4X blank cover 5X, 24.00 in wide box	—	unknown
EDH-EAT-00295	**6554C02**	PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-01129	**6554C02H01**	PRL4/PRL4X blank cover 1X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-01131	**6554C02H02**	PRL4/PRL4X blank cover 2X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-01133	**6554C02H03**	PRL4/PRL4X blank cover 3X, 36.00 / 44.00 in wide box	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01139	**6554C02H04**	PRL4/PRL4X blank cover 6X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-01141	**6554C02H05**	PRL4/PRL4X blank cover 7X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-01143	**6554C02H06**	PRL4/PRL4X blank cover 9X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-01145	**6554C02H07**	PRL4/PRL4X blank cover 10X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-01147	**6554C02H08**	PRL4/PRL4X blank cover 11X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-01149	**6554C02H09**	PRL4/PRL4X blank cover 12X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-01151	**6554C02H10**	PRL4/PRL4X blank cover 13X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-01153	**6554C02H11**	PRL4/PRL4X blank cover 15X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-01155	**6554C02H12**	PRL4/PRL4X blank cover 20X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-01135	**6554C02H13**	PRL4/PRL4X blank cover 4X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-01137	**6554C02H14**	PRL4/PRL4X blank cover 5X, 36.00 / 44.00 in wide box	—	unknown
EDH-EAT-00296	**P41X25**	PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)	—	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00294 **6554C01** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

PRL4/PRL4X blank cover for 24 in wide box (1X-20X)

OEM part number	6554C01	A	S1, S2, S4 s1 p.32 Table 45; s4 p.8 Table 13; oem_spec
Alternate / superseded numbers	1X H01; 2X H02; 3X H03; 4X H13; 5X H14; 6X H04; 7X H05; 9X H06; 10X H07; 11X H08; 12X H09; 13X H10; 15X H11; 20X H12	A	S1, S4 style_number; oem_spec
Description	Blank cover for unused chassis space, 24 in wide box	A	S1 oem_spec
Dimensions	Width 17 in; height 1X = 1 3/8 in ... 20X = 27 1/2 in	A	S4 p.8 Table 13; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.32; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-01128 **6554C01H01** Cutler-Hammer filler-plate **STATUS UNKNOWN**

PRL4/PRL4X blank cover 1X, 24.00 in wide box

OEM part number	6554C01H01	A	S16, S3, S626 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 1X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
	Deadfront filler blank, 1X 1.375 in H x 17 in W, for PRL4B narrow column panelboards; seller description also lists 'CH4BFP1'	C	S626 distributor
Dimensions	1 x 1.38 in high	A	S16 Table 36; oem_spec
	1X 1.375 in H x 17 in W	C	S626 distributor
Aftermarket / reproduction	Sourcing: Breaker King SKU BFP1CH4B, manufacturer field 'EATON/Cutler-Hammer' (genuine vs aftermarket not stated)	D	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Finish / plating, Material, Status		
Open question	*Is CH4BFP1 a Breaker King code or an Eaton catalog number?*		

EDH-EAT-01130	6554C01H02	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 2X, 24.00 in wide box

OEM part number	6554C01H02	A	S16, S3, S626 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 2X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
	Deadfront filler blank, 2X 2-3/4 in H x 17 in W, for PRL4B narrow column panelboards; seller description also lists 'CH4BFP2'	C	S626 distributor
Dimensions	2 x 1.38 in high	A	S16 Table 36; oem_spec
	2X 2-3/4 in H x 17 in W	C	S626 distributor
Aftermarket / reproduction	Sourcing: Breaker King SKU BFP2CH4B, manufacturer field 'EATON/Cutler-Hammer' (genuine vs aftermarket not stated)	D	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Finish / plating, Material, Status		
Open question	*Is CH4BFP2 a Breaker King code or an Eaton catalog number?*		

EDH-EAT-01132	6554C01H03	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 3X, 24.00 in wide box

OEM part number	6554C01H03	A	S16, S3, S626 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 3X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
	Deadfront filler blank, 3X 4-1/8 in H x 17 in W, for PRL4B narrow column panelboards; seller description also lists 'CH4BFP3'	C	S626 distributor
Dimensions	3 x 1.38 in high	A	S16 Table 36; oem_spec
	3X 4-1/8 in H x 17 in W	C	S626 distributor
Aftermarket / reproduction	Sourcing: Breaker King SKU BFP3CH4B, manufacturer field 'EATON/Cutler-Hammer' (genuine vs aftermarket not stated)	D	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Finish / plating, Material, Status		
Open question	*Is CH4BFP3 a Breaker King code or an Eaton catalog number?*		

EDH-EAT-01138	6554C01H04	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 6X, 24.00 in wide box

OEM part number	6554C01H04	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 6X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	6 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01140	6554C01H05	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 7X, 24.00 in wide box

OEM part number	6554C01H05	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 7X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	7 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01142	6554C01H06	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 9X, 24.00 in wide box

OEM part number	6554C01H06	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 9X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	9 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01144	6554C01H07	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 10X, 24.00 in wide box

OEM part number	6554C01H07	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 10X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	10 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01146	6554C01H08	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 11X, 24.00 in wide box

OEM part number	6554C01H08	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 11X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	11 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01148	6554C01H09	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 12X, 24.00 in wide box

OEM part number	6554C01H09	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 12X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	12 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01150	6554C01H10	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 13X, 24.00 in wide box

OEM part number	6554C01H10	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 13X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	13 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01152	6554C01H11	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 15X, 24.00 in wide box

OEM part number	6554C01H11	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 15X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	15 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01154	6554C01H12	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 20X, 24.00 in wide box

OEM part number	6554C01H12	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 20X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	20 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01134	6554C01H13	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 4X, 24.00 in wide box

OEM part number	6554C01H13	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 4X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	4 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01136	6554C01H14	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 5X, 24.00 in wide box

OEM part number	6554C01H14	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 5X high (1X = 1.38 in / 35.1 mm), for 24.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	5 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-00295	6554C02	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)

OEM part number	6554C02	A	S1, S2, S4 s1 p.32 Table 45; s4 p.8 Table 14; oem_spec
Alternate / superseded numbers	Same H scheme as 6554C01 (4X = H13, 5X = H14)	A	S1, S4 style_number; oem_spec
Description	Blank cover, 36.00 and 44.00 in wide boxes	A	S1 oem_spec
Dimensions	Width 25 in; height in X units (1X = 1.38 in)	A	S4 p.8 Table 14; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.32; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-01129	6554C02H01	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 1X, 36.00 / 44.00 in wide box

OEM part number	6554C02H01	A	S16, S3, S626 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 1X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
	Deadfront filler blank, 1X 1.375 in H x 25 in W, for PRL4A panelboards; seller description also lists 'CH4FP1'	C	S626 distributor
Dimensions	1 x 1.38 in high	A	S16 Table 36; oem_spec
	1X 1.375 in H x 25 in W	C	S626 distributor
Aftermarket / reproduction	Sourcing: Breaker King SKU BFP1CH, manufacturer field 'EATON/Cutler-Hammer' (genuine vs aftermarket not stated)	D	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Finish / plating, Material, Status		
Open question	*Is CH4FP1 a Breaker King code or an Eaton catalog number?*		

EDH-EAT-01131	6554C02H02	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 2X, 36.00 / 44.00 in wide box

OEM part number	6554C02H02	A	S16, S3, S626 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 2X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
	Deadfront filler blank, 2X 2-3/4 in H x 25 in W, for PRL4A panelboards; seller description also lists 'CH4FP2'	C	S626 distributor
Dimensions	2 x 1.38 in high	A	S16 Table 36; oem_spec
	2X 2-3/4 in H x 25 in W	C	S626 distributor
Aftermarket / reproduction	Sourcing: Breaker King SKU BFP2CH, manufacturer field 'EATON/Cutler-Hammer' (genuine vs aftermarket not stated)	D	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Finish / plating, Material, Status		
Open question	*Is CH4FP2 a Breaker King code or an Eaton catalog number?*		

EDH-EAT-01133	6554C02H03	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 3X, 36.00 / 44.00 in wide box

OEM part number	6554C02H03	A	S16, S3, S626 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 3X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
	Deadfront filler blank, 3X 4-1/8 in H x 25 in W, for PRL4A panelboards; seller description also lists 'CH4FP3'	C	S626 distributor
Dimensions	3 x 1.38 in high	A	S16 Table 36; oem_spec
	3X 4-1/8 in H x 25 in W	C	S626 distributor
Aftermarket / reproduction	Sourcing: Breaker King SKU BFP3CH, manufacturer field 'EATON/Cutler-Hammer' (genuine vs aftermarket not stated)	D	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Finish / plating, Material, Status		
Open question	*Is CH4FP3 a Breaker King code or an Eaton catalog number?*		

EDH-EAT-01139	6554C02H04	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 6X, 36.00 / 44.00 in wide box

OEM part number	6554C02H04	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 6X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	6 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01141	6554C02H05	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 7X, 36.00 / 44.00 in wide box

OEM part number	6554C02H05	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 7X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	7 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01143	6554C02H06	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 9X, 36.00 / 44.00 in wide box

OEM part number	6554C02H06	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 9X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	9 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01145	6554C02H07	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 10X, 36.00 / 44.00 in wide box

OEM part number	6554C02H07	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 10X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	10 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01147	6554C02H08	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 11X, 36.00 / 44.00 in wide box

OEM part number	6554C02H08	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 11X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	11 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01149	6554C02H09	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 12X, 36.00 / 44.00 in wide box

OEM part number	6554C02H09	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 12X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	12 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01151	6554C02H10	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 13X, 36.00 / 44.00 in wide box

OEM part number	6554C02H10	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 13X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	13 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01153	6554C02H11	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 15X, 36.00 / 44.00 in wide box

OEM part number	6554C02H11	A	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 15X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	A	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	15 x 1.38 in high	A	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01155	6554C02H12	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 20X, 36.00 / 44.00 in wide box

OEM part number	6554C02H12	**A**	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 20X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	**A**	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	20 x 1.38 in high	**A**	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01135	6554C02H13	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 4X, 36.00 / 44.00 in wide box

OEM part number	6554C02H13	**A**	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 4X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	**A**	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	4 x 1.38 in high	**A**	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01137	6554C02H14	Cutler-Hammer	filler-plate	STATUS UNKNOWN

PRL4/PRL4X blank cover 5X, 36.00 / 44.00 in wide box

OEM part number	6554C02H14	**A**	S16, S3 oem_spec
Description	PRL4/PRL4X blank cover (covers blank chassis space), 5X high (1X = 1.38 in / 35.1 mm), for 36.00 / 44.00 in wide box.	**A**	S16, S3 Oct 2017 p.24 Table 36; May 2022 p.32 Table 45; oem_spec
Dimensions	5 x 1.38 in high	**A**	S16 Table 36; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-00296	P41X25	Cutler-Hammer	filler-plate	ACTIVE EATON PRODUCT P

PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)

OEM part number	P41X25	A	S12, S251 oem_spec
Alternate / superseded numbers	UPC 621037246102	A	S251 alias; skuPage.P41X25 (General/Product specifications); oem_spec
Description	Eaton, prl4- 1x blank cover	A	same as above
	SWBD/PRL4 1X filler 1.375 in H x 25 in W, fits 36, 44, 45 in enclosures ('Eaton, PRL4- 1X Blank Cover')	C	S12 distributor
Dimensions	1.375 in H x 25 in W	C	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.P41X25 (General/Product specifications); oem_spec
	Distributor-listed	C	S12 distributor
Listing / approvals	UL 67	A	S251 skuPage.P41X25 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 1 in, width 25 in, weight 2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Relationship between P41X25 and OEM renewal part 6554C02H01 (both 1X, 25 in wide) - possibly switchboard-channel catalog equivalent; not confirmed.*		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00404	**1A32258H03**	Standard trim lock for PRL4X and PRL4 lighting and power panels	—	Listed in renewal parts guide(s) s1, s2, s4
EDH-EAT-01080	**LDD2457FTW**	PRL4 door-in-door trim, flush, for BX2457 (24 x 57 in)	—	unknown
EDH-EAT-01079	**LDD2457STW**	PRL4 door-in-door trim, surface, for BX2457 (24 x 57 in)	—	unknown
EDH-EAT-01085	**LDD2473FTW**	PRL4 door-in-door trim, flush, for BX2473 (24 x 73 in)	—	unknown
EDH-EAT-01084	**LDD2473STW**	PRL4 door-in-door trim, surface, for BX2473 (24 x 73 in)	—	unknown
EDH-EAT-01090	**LDD2490FTW**	PRL4 door-in-door trim, flush, for BX2490 (24 x 90 in)	—	unknown
EDH-EAT-01089	**LDD2490STW**	PRL4 door-in-door trim, surface, for BX2490 (24 x 90 in)	—	unknown
EDH-EAT-01095	**LDD3673FTW**	PRL4 door-in-door trim, flush, for BX3673 (36 x 73 in)	—	unknown
EDH-EAT-01094	**LDD3673STW**	PRL4 door-in-door trim, surface, for BX3673 (36 x 73 in)	—	unknown
EDH-EAT-01100	**LDD3690FTW**	PRL4 door-in-door trim, flush, for BX3690 (36 x 90 in)	—	unknown
EDH-EAT-01099	**LDD3690STW**	PRL4 door-in-door trim, surface, for BX3690 (36 x 90 in)	—	unknown
EDH-EAT-01104	**LDD4473FTW**	PRL4 door-in-door trim, flush, for BX4473 (44 x 73 in)	—	unknown
EDH-EAT-01103	**LDD4473STW**	PRL4 door-in-door trim, surface, for BX4473 (44 x 73 in)	—	unknown
EDH-EAT-01108	**LDD4490FTW**	PRL4 door-in-door trim, flush, for BX4490 (44 x 90 in)	—	unknown
EDH-EAT-01107	**LDD4490STW**	PRL4 door-in-door trim, surface, for BX4490 (44 x 90 in)	—	unknown

EDH-EAT-00404	1A32258H03	Eaton	trim	LISTED IN RENEWAL PART

Standard trim lock for PRL4X and PRL4 lighting and power panels

OEM part number	1A32258H03	A	S1, S2, S4, S442 oem_spec
Description	Standard trim lock for PRL4X and PRL4 lighting and power panels	A	S1, S2, S4 oem_spec
	Vintage Cutler-Hammer panelboard trim lock: Used on lighting and small power panels as standard	A	S442 p.23 Table 26; oem_spec
Status	Listed in renewal parts guide(s) s1, s2, s4	A	S1, S2, S4 oem_spec
	Contact Sumter Aftermarket Product Center for availability (trim locks redesigned over the years)	A	S442 p.23; oem_spec
Cross-links	Families: PRL4, PRL4X, MP40, PB, PH, EP		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-01080	LDD2457FTW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, flush, for BX2457 (24 x 57 in)

OEM part number	LDD2457FTW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, flush mounted, for standard box BX2457; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G02 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01079	LDD2457STW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, surface, for BX2457 (24 x 57 in)

OEM part number	LDD2457STW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, surface mounted, for standard box BX2457; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G02 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01085	LDD2473FTW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, flush, for BX2473 (24 x 73 in)

OEM part number	LDD2473FTW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, flush mounted, for standard box BX2473; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G03 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01084	LDD2473STW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, surface, for BX2473 (24 x 73 in)

OEM part number	LDD2473STW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, surface mounted, for standard box BX2473; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G03 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01090	LDD2490FTW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, flush, for BX2490 (24 x 90 in)

OEM part number	LDD2490FTW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, flush mounted, for standard box BX2490; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G04 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01089	LDD2490STW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, surface, for BX2490 (24 x 90 in)

OEM part number	LDD2490STW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, surface mounted, for standard box BX2490; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G04 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01095	LDD3673FTW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, flush, for BX3673 (36 x 73 in)

OEM part number	LDD3673FTW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, flush mounted, for standard box BX3673; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G05 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01094	LDD3673STW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, surface, for BX3673 (36 x 73 in)

OEM part number	LDD3673STW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, surface mounted, for standard box BX3673; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G05 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01100	LDD3690FTW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, flush, for BX3690 (36 x 90 in)

OEM part number	LDD3690FTW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, flush mounted, for standard box BX3690; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G06 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01099	LDD3690STW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, surface, for BX3690 (36 x 90 in)

OEM part number	LDD3690STW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, surface mounted, for standard box BX3690; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G06 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01104	LDD4473FTW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, flush, for BX4473 (44 x 73 in)

OEM part number	LDD4473FTW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, flush mounted, for standard box BX4473; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G07 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01103	LDD4473STW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, surface, for BX4473 (44 x 73 in)

OEM part number	LDD4473STW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, surface mounted, for standard box BX4473; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G07 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01108	LDD4490FTW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, flush, for BX4490 (44 x 90 in)

OEM part number	LDD4490FTW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, flush mounted, for standard box BX4490; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G08 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

EDH-EAT-01107	LDD4490STW	Cutler-Hammer	trim	STATUS UNKNOWN

PRL4 door-in-door trim, surface, for BX4490 (44 x 90 in)

OEM part number	LDD4490STW	A	S3, S16 oem_spec
Description	PRL4 door-in-door trim, surface mounted, for standard box BX4490; piano hinge on right side gives gutter access without removing trim; requires mounting channel 8708C82G08 with standard box. Flush trims on PRL4B only with door-in-door enclosure (Tab 22).	A	S3, S16 p.38 Table 57; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	lock, Material		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01076	**BX2457**	PRL4 / PRL4X NEMA 1 box, 57 in high x 24 in wide x 10.40 in deep	—	unknown
EDH-EAT-01081	**BX2473**	PRL4 / PRL4X NEMA 1 box, 73 in high x 24 in wide x 10.40 in deep	—	unknown
EDH-EAT-01086	**BX2490**	PRL4 / PRL4X NEMA 1 box, 90 in high x 24 in wide x 10.40 in deep	—	unknown
EDH-EAT-01091	**BX3673**	PRL4 / PRL4X NEMA 1 box, 73 in high x 36 in wide x 10.40 in deep	—	unknown
EDH-EAT-01096	**BX3690**	PRL4 / PRL4X NEMA 1 box, 90 in high x 36 in wide x 10.40 in deep	—	unknown
EDH-EAT-01101	**BX4473**	PRL4 / PRL4X NEMA 1 box, 73 in high x 44 in wide x 10.40 in deep	—	unknown
EDH-EAT-01105	**BX4490**	PRL4 / PRL4X NEMA 1 box, 90 in high x 44 in wide x 10.40 in deep	—	unknown
EDH-EAT-01119	**DPC2457**	PRL4 Type 12 enclosure 57 x 24 x 13.90 in	—	unknown
EDH-EAT-01121	**DPC2473**	PRL4 Type 12 enclosure 73 x 24 x 13.90 in	—	unknown
EDH-EAT-01123	**DPC2490**	PRL4 Type 12 enclosure 90 x 24 x 13.90 in	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01125	**DPC3673**	PRL4 Type 12 enclosure 73 x 36 x 13.90 in	—	unknown
EDH-EAT-01127	**DPC3690**	PRL4 Type 12 enclosure 90 x 36 x 13.90 in	—	unknown
EDH-EAT-01118	**RPCB2457**	PRL4 Type 3R enclosure 57 x 24 x 13.90 in	—	unknown
EDH-EAT-01120	**RPCB2473**	PRL4 Type 3R enclosure 73 x 24 x 13.90 in	—	unknown
EDH-EAT-01122	**RPCB2490**	PRL4 Type 3R enclosure 90 x 24 x 13.90 in	—	unknown
EDH-EAT-01124	**RPCB3673**	PRL4 Type 3R enclosure 73 x 36 x 13.90 in	—	unknown
EDH-EAT-01126	**RPCB3690**	PRL4 Type 3R enclosure 90 x 36 x 13.90 in	—	unknown

EDH-EAT-01076 **BX2457** Cutler-Hammer box/enclosure **STATUS UNKNOWN**

PRL4 / PRL4X NEMA 1 box, 57 in high x 24 in wide x 10.40 in deep

OEM part number	BX2457	**A**	S3, S16 oem_spec
Description	PRL4/PRL4X standard NEMA 1 box 57.00 x 24.00 x 10.40 in (H x W x D); covers add 0.90 in for overall depth 11.30 in. Vented cover assembly 6574C74G02; side gutter covers left 6555C20H01 (5.00 x 57.00 in), right 6555C20H01 (5.00 x 57.00 in); door-in-door mounting channel 8708C82G02.	**A**	S3, S16 May 2022 p.31 Table 44, p.38 Table 57; Oct 2017 Table 35; oem_spec
Dimensions	57.00 in H x 24.00 in W x 10.40 in D (box); 11.30 in overall with covers	**A**	S3 p.31 Table 44 note a; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	gauge, Material, Status		

EDH-EAT-01081 **BX2473** Cutler-Hammer box/enclosure **STATUS UNKNOWN**

PRL4 / PRL4X NEMA 1 box, 73 in high x 24 in wide x 10.40 in deep

OEM part number	BX2473	**A**	S3, S16 oem_spec
Description	PRL4/PRL4X standard NEMA 1 box 73.00 x 24.00 x 10.40 in (H x W x D); covers add 0.90 in for overall depth 11.30 in. Vented cover assembly 6574C74G03; side gutter covers left 6555C21H01 (5.00 x 73.00 in), right 6555C21H01 (5.00 x 73.00 in); door-in-door mounting channel 8708C82G03.	**A**	S3, S16 May 2022 p.31 Table 44, p.38 Table 57; Oct 2017 Table 35; oem_spec
Dimensions	73.00 in H x 24.00 in W x 10.40 in D (box); 11.30 in overall with covers	**A**	S3 p.31 Table 44 note a; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	gauge, Material, Status		

EDH-EAT-01086 **BX2490** Cutler-Hammer box/enclosure **STATUS UNKNOWN**

PRL4 / PRL4X NEMA 1 box, 90 in high x 24 in wide x 10.40 in deep

OEM part number	BX2490	**A**	S3, S16 oem_spec
Description	PRL4/PRL4X standard NEMA 1 box 90.00 x 24.00 x 10.40 in (H x W x D); covers add 0.90 in for overall depth 11.30 in. Vented cover assembly 6574C74G04; side gutter covers left 6555C25H01 (5.00 x 90.00 in), right 6555C25H01 (5.00 x 90.00 in); door-in-door mounting channel 8708C82G04.	**A**	S3, S16 May 2022 p.31 Table 44, p.38 Table 57; Oct 2017 Table 35; oem_spec
Dimensions	90.00 in H x 24.00 in W x 10.40 in D (box); 11.30 in overall with covers	**A**	S3 p.31 Table 44 note a; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	gauge, Material, Status		

EDH-EAT-01091	BX3673	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 / PRL4X NEMA 1 box, 73 in high x 36 in wide x 10.40 in deep

OEM part number	BX3673	A	S3, S16 oem_spec
Description	PRL4/PRL4X standard NEMA 1 box 73.00 x 36.00 x 10.40 in (H x W x D); covers add 0.90 in for overall depth 11.30 in. Vented cover assembly 6574C74G05; side gutter covers left 6555C22H01 (6.00 x 73.00 in), right 6555C23H01 (8.00 x 73.00 in); door-in-door mounting channel 8708C82G05.	A	S3, S16 May 2022 p.31 Table 44, p.38 Table 57; Oct 2017 Table 35; oem_spec
Dimensions	73.00 in H x 36.00 in W x 10.40 in D (box); 11.30 in overall with covers	A	S3 p.31 Table 44 note a; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	gauge, Material, Status		

EDH-EAT-01096	BX3690	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 / PRL4X NEMA 1 box, 90 in high x 36 in wide x 10.40 in deep

OEM part number	BX3690	A	S3, S16 oem_spec
Description	PRL4/PRL4X standard NEMA 1 box 90.00 x 36.00 x 10.40 in (H x W x D); covers add 0.90 in for overall depth 11.30 in. Vented cover assembly 6574C74G06; side gutter covers left 6555C26H01 (6.00 x 90.00 in), right 6555C27H01 (8.00 x 90.00 in); door-in-door mounting channel 8708C82G06.	A	S3, S16 May 2022 p.31 Table 44, p.38 Table 57; Oct 2017 Table 35; oem_spec
Dimensions	90.00 in H x 36.00 in W x 10.40 in D (box); 11.30 in overall with covers	A	S3 p.31 Table 44 note a; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	gauge, Material, Status		

EDH-EAT-01101	BX4473	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 / PRL4X NEMA 1 box, 73 in high x 44 in wide x 10.40 in deep

OEM part number	BX4473	A	S3, S16 oem_spec
Description	PRL4/PRL4X standard NEMA 1 box 73.00 x 44.00 x 10.40 in (H x W x D); covers add 0.90 in for overall depth 11.30 in. Vented cover assembly 6574C74G05; side gutter covers left 6555C23H01 (8.00 x 73.00 in), right 6555C24H01 (14.00 x 73.00 in); door-in-door mounting channel 8708C82G07.	A	S3, S16 May 2022 p.31 Table 44, p.38 Table 57; Oct 2017 Table 35; oem_spec
Dimensions	73.00 in H x 44.00 in W x 10.40 in D (box); 11.30 in overall with covers	A	S3 p.31 Table 44 note a; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	gauge, Material, Status		

EDH-EAT-01105	BX4490	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 / PRL4X NEMA 1 box, 90 in high x 44 in wide x 10.40 in deep

OEM part number	BX4490	A	S3, S16 oem_spec
Description	PRL4/PRL4X standard NEMA 1 box 90.00 x 44.00 x 10.40 in (H x W x D); covers add 0.90 in for overall depth 11.30 in. Vented cover assembly 6574C74G06; side gutter covers left 6555C27H01 (8.00 x 90.00 in), right 6555C28H01 (14.00 x 90.00 in); door-in-door mounting channel 8708C82G08.	A	S3, S16 May 2022 p.31 Table 44, p.38 Table 57; Oct 2017 Table 35; oem_spec
Dimensions	90.00 in H x 44.00 in W x 10.40 in D (box); 11.30 in overall with covers	A	S3 p.31 Table 44 note a; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	gauge, Material, Status		

EDH-EAT-01119	DPC2457	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 Type 12 enclosure 57 x 24 x 13.90 in

OEM part number	DPC2457	A	S3, S16 oem_spec
Description	PRL4 Type 12 (dust-tight) enclosure 57.00 H x 24.00 W x 13.90 D in; side gutter covers integral.	A	S3, S16 May 2022 p.38 Table 58; Oct 2017 Table 46; oem_spec
Dimensions	57.00 x 24.00 x 13.90 in	A	S3 p.38 Table 58; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01121	DPC2473	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 Type 12 enclosure 73 x 24 x 13.90 in

OEM part number	DPC2473	A	S3, S16 oem_spec
Description	PRL4 Type 12 (dust-tight) enclosure 73.00 H x 24.00 W x 13.90 D in; side gutter covers integral.	A	S3, S16 May 2022 p.38 Table 58; Oct 2017 Table 46; oem_spec
Dimensions	73.00 x 24.00 x 13.90 in	A	S3 p.38 Table 58; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01123	DPC2490	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 Type 12 enclosure 90 x 24 x 13.90 in

OEM part number	DPC2490	A	S3, S16 oem_spec
Description	PRL4 Type 12 (dust-tight) enclosure 90.00 H x 24.00 W x 13.90 D in; side gutter covers integral.	A	S3, S16 May 2022 p.38 Table 58; Oct 2017 Table 46; oem_spec
Dimensions	90.00 x 24.00 x 13.90 in	A	S3 p.38 Table 58; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01125	DPC3673	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 Type 12 enclosure 73 x 36 x 13.90 in

OEM part number	DPC3673	A	S3, S16 oem_spec
Description	PRL4 Type 12 (dust-tight) enclosure 73.00 H x 36.00 W x 13.90 D in; side gutter covers integral.	A	S3, S16 May 2022 p.38 Table 58; Oct 2017 Table 46; oem_spec
Dimensions	73.00 x 36.00 x 13.90 in	A	S3 p.38 Table 58; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01127	DPC3690	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 Type 12 enclosure 90 x 36 x 13.90 in

OEM part number	DPC3690	A	S3, S16 oem_spec
Description	PRL4 Type 12 (dust-tight) enclosure 90.00 H x 36.00 W x 13.90 D in; side gutter covers integral.	A	S3, S16 May 2022 p.38 Table 58; Oct 2017 Table 46; oem_spec
Dimensions	90.00 x 36.00 x 13.90 in	A	S3 p.38 Table 58; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01118	RPCB2457	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 Type 3R enclosure 57 x 24 x 13.90 in

OEM part number	RPCB2457	A	S3, S16 oem_spec
Alternate / superseded numbers	RPC2457 (Printed RPC.... in Oct 2017 edition, RPCB.... in May 2022 edition)	A	S16 alias; Oct 2017 Table 46; oem_spec
Description	PRL4 Type 3R (rainproof) enclosure 57.00 H x 24.00 W x 13.90 D in; 24 in wide has single hinged door, 36 in double doors; side gutter covers integral to box.	A	S3, S16 May 2022 p.38 Table 58; Oct 2017 Table 46; oem_spec
Dimensions	57.00 x 24.00 x 13.90 in	A	S3 p.38 Table 58; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01120	RPCB2473	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 Type 3R enclosure 73 x 24 x 13.90 in

OEM part number	RPCB2473	A	S3, S16 oem_spec
Alternate / superseded numbers	RPC2473 (Printed RPC.... in Oct 2017 edition, RPCB.... in May 2022 edition)	A	S16 alias; Oct 2017 Table 46; oem_spec
Description	PRL4 Type 3R (rainproof) enclosure 73.00 H x 24.00 W x 13.90 D in; 24 in wide has single hinged door, 36 in double doors; side gutter covers integral to box.	A	S3, S16 May 2022 p.38 Table 58; Oct 2017 Table 46; oem_spec
Dimensions	73.00 x 24.00 x 13.90 in	A	S3 p.38 Table 58; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01122	RPCB2490	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 Type 3R enclosure 90 x 24 x 13.90 in

OEM part number	RPCB2490	A	S3, S16 oem_spec
Alternate / superseded numbers	RPC2490 (Printed RPC.... in Oct 2017 edition, RPCB.... in May 2022 edition)	A	S16 alias; Oct 2017 Table 46; oem_spec
Description	PRL4 Type 3R (rainproof) enclosure 90.00 H x 24.00 W x 13.90 D in; 24 in wide has single hinged door, 36 in double doors; side gutter covers integral to box.	A	S3, S16 May 2022 p.38 Table 58; Oct 2017 Table 46; oem_spec
Dimensions	90.00 x 24.00 x 13.90 in	A	S3 p.38 Table 58; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01124	RPCB3673	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 Type 3R enclosure 73 x 36 x 13.90 in

OEM part number	RPCB3673	A	S3, S16 oem_spec
Alternate / superseded numbers	RPC3673 (Printed RPC.... in Oct 2017 edition, RPCB.... in May 2022 edition)	A	S16 alias; Oct 2017 Table 46; oem_spec
Description	PRL4 Type 3R (rainproof) enclosure 73.00 H x 36.00 W x 13.90 D in; 24 in wide has single hinged door, 36 in double doors; side gutter covers integral to box.	A	S3, S16 May 2022 p.38 Table 58; Oct 2017 Table 46; oem_spec
Dimensions	73.00 x 36.00 x 13.90 in	A	S3 p.38 Table 58; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

EDH-EAT-01126	RPCB3690	Cutler-Hammer	box/enclosure	STATUS UNKNOWN

PRL4 Type 3R enclosure 90 x 36 x 13.90 in

OEM part number	RPCB3690	A	S3, S16 oem_spec
Alternate / superseded numbers	RPC3690 (Printed RPC.... in Oct 2017 edition, RPCB.... in May 2022 edition)	A	S16 alias; Oct 2017 Table 46; oem_spec
Description	PRL4 Type 3R (rainproof) enclosure 90.00 H x 36.00 W x 13.90 D in; 24 in wide has single hinged door, 36 in double doors; side gutter covers integral to box.	A	S3, S16 May 2022 p.38 Table 58; Oct 2017 Table 46; oem_spec
Dimensions	90.00 x 36.00 x 13.90 in	A	S3 p.38 Table 58; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00417	**5081A08G02**	PRL4 chassis mounting hardware	—	Listed in s4
EDH-EAT-00418	**5081A09G02**	PRL4 gutter cover mounting hardware	—	Listed in s4
EDH-EAT-01263	**70010DCBCH**	Eaton PRL4/PRLC dead front cover screws (1/4-20 x .50)	—	unknown

EDH-EAT-00417	5081A08G02	Cutler-Hammer	fastener	LISTED IN S4

PRL4 chassis mounting hardware

OEM part number	5081A08G02	A	S4 oem_spec
Description	PRL4 chassis mounting hardware (nuts and washers)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00418	5081A09G02	Cutler-Hammer	fastener	LISTED IN S4

PRL4 gutter cover mounting hardware

OEM part number	5081A09G02	A	S4 oem_spec
Description	PRL4 gutter cover mounting hardware (screws and captive nuts)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-01263	70010DCBCH	Eaton	fastener	STATUS UNKNOWN

Eaton PRL4/PRLC dead front cover screws (1/4-20 x .50)

OEM part number	70010DCBCH	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Description	PRL4/PRLC dead front cover screws (1/4-20 x .50) (Pow-R-Kit renewal part list, RP01414001E).	A	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Material, Status		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00365	**TAD3**	TAD3 adapter kit - KD breaker onto existing Westinghouse LB-frame connectors	Series C K family (DK, KD, KDB, HKD, KDC) replacing LB, HLB, LBB or JA A	Referenced Feb 2013

EDH-EAT-00365	TAD3	Westinghouse	conversion-kit	REFERENCED FEB 2013

TAD3 adapter kit - KD breaker onto existing Westinghouse LB-frame connectors

OEM part number	TAD3	A	S5, S14, S13, S184, S442 p.13 note; oem_spec

Alternate / superseded numbers	UPC 786679161487	A	S251 alias; skuPage.TAD3 (General/Product specifications); oem_spec
Description	Adapter kit required when mounting a Series C KD frame breaker onto existing LB frame connectors; included with KD retrofit or connector kits, may be purchased separately	A	S5 p.13; oem_spec
	Adapter kit required when mounting a Series C KD-frame breaker onto existing LB-frame connectors; included in orders for KD retrofit kits or connector kits, also sold separately	A	S14 p. 13 note; oem_spec
	K-frame terminal adapter for use in replacing LB/DA breakers	A	S184 p.12-244, Table 12-451; oem_spec
	TAD3 adapter kit required when mounting a Series C KD-frame breaker onto existing KS (A) connectors; may be purchased separately for use with existing LB or KS (A) connectors. (Additional evidence: Eaton molded case circuit breaker accessory terminal, Terminal adapter assembly, Three-pole K-Frame breakers, Frame J-K, Series C [A, s_sku, skuPage.TAD3 (General/Product specifications)])	A	S442 p.23 Table 24 note a; oem_spec
Application	branch (line-side adapter)	A	S13 p. V12-T4-7 note 6; oem_spec
	accessory	A	S184 p.12-244, Table 12-451; oem_spec
Installation location	Line side of K-frame breaker on CDP chassis existing LB connectors; allows KD opposite LB breakers	A	S13 p. V12-T4-7 note 6; oem_spec
Breaker compatibility	Series C K family (DK, KD, KDB, HKD, KDC) replacing LB, HLB, LBB or JA in panelboard applications	A	S14, S13 RP01400002E p. 13; V12-T3-11 note 1; oem_spec
	K-frame (replacing Westinghouse LB/DA breakers)	A	S184 p.12-244, Table 12-451; oem_spec
	Series C KD / KDB / HKD replacing obsolete KS(A) / KH(A) / LB (Additional evidence: Three-pole K-Frame breakers [A, s_sku, skuPage.TAD3 (General/Product specifications)])	A	S442 p.23 Table 24; oem_spec
Breaker frame	Frame J-K	A	S251 skuPage.TAD3 (General/Product specifications); oem_spec
Kit contents	Used with three-pole K-frame breakers (Eaton web 'Special features' attribute)	A	same as above
Status	Referenced Feb 2013	A	S5 oem_spec
	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TAD3 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.TAD3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1.1 in, height 0.5 in, width 0.5 in, weight 0.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, CDP, MP40, MP2, EP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, JA, LB, KD, Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Exact contents of TAD3 (spacer blocks vs. extended line straps)?*		
Open question	*Is TAD3 also used on WF/WRP switchboard LB provisions?*		
Open question	*Which legacy LB/DA conductor geometry does TAD3 adapt to; quantity per package?*		

Spd Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01231	**PDSPD2403SA2A-K4**	Eaton integrated panelboard SPD PDSPD2403SA2A-K4	Direct bus mounted **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01229	**PDSPD4803SA2A-K4**	Eaton integrated panelboard SPD PDSPD4803SA2A-K4	Direct bus mounted **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-01231	PDSPD2403SA2A-K4	Eaton	spd-kit	ACTIVE EATON PRODUCT P

Eaton integrated panelboard SPD PDSPD2403SA2A-K4

OEM part number	PDSPD2403SA2A-K4	A	S251 oem_spec
Alternate / superseded numbers	UPC 786689056391	A	S251 alias; skuPage.PDSPD2403SA2A-K4 (General/Product specifications); oem_spec
Description	Eaton Surge Protection Device for sub-panel, RSPF Series, F Frame, 120/208Y, 127/220Y, 240D rating, integrated , Basic feature package plus filtering, Direct Bus Mounted, with KPRL4FD Provision Kit	A	same as above
Application	Integral SPD; Three-phase; Operating temperature; -40 to 60 °C	A	same as above
Breaker compatibility	Direct bus mounted (Eaton web 'Used with' attribute)	A	same as above
Voltage rating	480 V	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL 1449; UL Listed	A	S251 skuPage.PDSPD2403SA2A-K4 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6 in, height 3.81 in, width 4.13 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Warranty	2 year	A	same as above
Cross-links	Families: PRL4		
Requires	KPRL4FD (EDH-EAT-00328)		
Not yet documented	Dimensions, mounting_hardware		

EDH-EAT-01229	PDSPD4803SA2A-K4	Eaton	spd-kit	ACTIVE EATON PRODUCT P

Eaton integrated panelboard SPD PDSPD4803SA2A-K4

OEM part number	PDSPD4803SA2A-K4	A	S251 oem_spec
Alternate / superseded numbers	UPC 786689056346	A	S251 alias; skuPage.PDSPD4803SA2A-K4 (General/Product specifications); oem_spec
Description	Eaton Surge Protection Device for sub-panel, RSPF Series, F Frame, 230/400Y, 480D rating, 277/480Y, integrated , Basic feature package plus filtering, Direct Bus Mounted, with KPRL4FD Provision Kit	A	same as above
Application	Integral SPD; Three-phase; Operating temperature; -40 to 60 °C	A	same as above
Breaker compatibility	Direct bus mounted (Eaton web 'Used with' attribute)	A	same as above
Voltage rating	480 V	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL 1449; UL Listed	A	S251 skuPage.PDSPD4803SA2A-K4 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6 in, height 3.81 in, width 4.13 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Warranty	2 year	A	same as above
Cross-links	Families: PRL4		
Requires	KPRL4FD (EDH-EAT-00328)		
Not yet documented	Dimensions, mounting_hardware		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01207	**FDPBS324R**	PRL4 three-pole fusible switch 200 A, 240 V, single (6X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01208	**FDPBS364R**	PRL4 three-pole fusible switch 200 A, 600 V, single (6X)	—	Active Eaton product page (no Discontinued banner), accessed

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01209	**FDPBT3244R**	PRL4 three-pole fusible switch 200-200 A, 240 V, twin (6X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01210	**FDPBT3644R**	PRL4 three-pole fusible switch 200-200 A, 600 V, twin (6X)	—	unknown
EDH-EAT-01211	**FDPW325R**	PRL4 three-pole fusible switch 400 A, 240 V, single (9X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01213	**FDPW326R**	PRL4 three-pole fusible switch 600 A, 240 V, single (11X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01215	**FDPW327**	PRL4 three-pole fusible switch 800 A, 240 V, single (11X)	—	unknown
EDH-EAT-01217	**FDPW328**	PRL4 three-pole fusible switch 1200 A, 240 V, single (15X)	—	unknown
EDH-EAT-01212	**FDPW365R**	PRL4 three-pole fusible switch 400 A, 600 V, single (9X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01214	**FDPW366R**	PRL4 three-pole fusible switch 600 A, 600 V, single (11X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01216	**FDPW367**	PRL4 three-pole fusible switch 800 A, 600 V, single (11X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01218	**FDPW368**	PRL4 three-pole fusible switch 1200 A, 600 V, single (15X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01201	**FDPWT3211R**	PRL4 three-pole fusible switch 30-30 A, 240 V, twin (4X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01203	**FDPWT3222R**	PRL4 three-pole fusible switch 60-60 A, 240 V, twin (4X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01205	**FDPWT3233R**	PRL4 three-pole fusible switch 100-100 A, 240 V, twin (4X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01202	**FDPWT3611R**	PRL4 three-pole fusible switch 30-30 A, 600 V, twin (4X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01204	**FDPWT3622R**	PRL4 three-pole fusible switch 60-60 A, 600 V, twin (4X)	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-01206	**FDPWT3633R**	PRL4 three-pole fusible switch 100-100 A, 600 V, twin (5X)	—	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-01207	FDPBS324R	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 200 A, 240 V, single (6X)

OEM part number	FDPBS324R	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPBS324R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
	UPC 782114895153	A	S251 alias; skuPage.FDPBS324R (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 200 A, 240 V, single mount, switch height 6X 8.25 in; connector kit KPRL4B6XS (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (Additional evidence: Fusible panelboard switch, FDPB, 200A, Three-pole, 240 Vac, 250 Vdc, 200 kAIC at 240 Vac, 10 kAIC at 250 Vdc, (1) #4-300 kcmil, Class R fuses, 60 hp at 240 Vac, 40 hp at 250 Vdc, Single, horizontal, Branch [A, s_sku, skuPage.FDPBS324R (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPBS324R (General/Product specifications)])	A	S3 p.34; oem_spec
Voltage rating	240 V (Additional evidence: 240 Vac, 250 Vdc [A, s_sku, skuPage.FDPBS324R (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec
Current rating	200 A (Additional evidence: 200A [A, s_sku, skuPage.FDPBS324R (General/Product specifications)])	A	same as above
Wire range	#4 AWG-300 kcmil; Fuse class provision; Class R fuses	A	S251 skuPage.FDPBS324R (General/Product specifications); oem_spec
Dimensions	Switch height 6X 8.25 in	A	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPBS324R (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.FDPBS324R (General/Product specifications); oem_spec
Installation requirements	Pressure terminals supplied one per pole (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 22 in, height 10 in, width 9.5 in, weight 23 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01208	FDPBS364R	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 200 A, 600 V, single (6X)

OEM part number	FDPBS364R	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPBS364R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
	UPC 782114895160	A	S251 alias; skuPage.FDPBS364R (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 200 A, 600 V, single mount, switch height 6X 8.25 in; connector kit KPRL4B6XS (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (Additional evidence: Fusible panelboard switch, FDPB, 200A, Three-pole, 600 Vac, 200 kAIC, (1) #4-300 kcmil, Class R fuses, 60 hp at 240 Vac, 125 hp at 480 Vac, 150 hp at 600 Vac, Single, horizontal, Branch [A, s_sku, skuPage.FDPBS364R (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPBS364R (General/Product specifications)])	A	S3 p.34; oem_spec
Voltage rating	600 V (Additional evidence: 600 V [A, s_sku, skuPage.FDPBS364R (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec
Current rating	200 A (Additional evidence: 200A [A, s_sku, skuPage.FDPBS364R (General/Product specifications)])	A	same as above
Wire range	#4 AWG-300 kcmil; Fuse class provision; Class R fuses	A	S251 skuPage.FDPBS364R (General/Product specifications); oem_spec
Dimensions	Switch height 6X 8.25 in	A	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPBS364R (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.FDPBS364R (General/Product specifications); oem_spec
Installation requirements	Pressure terminals supplied one per pole (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 21.5 in, height 10 in, width 9.25 in, weight 21.8 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01209	FDPBT3244R	Eaton	switch-unit	ACTIVE EATON PRODUCT P
PRL4 three-pole fusible switch 200-200 A, 240 V, twin (6X)				
OEM part number	FDPBT3244R	A	S3 oem_spec	
Alternate / superseded numbers	KPRL4FDPBT3244R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference	
	UPC 782116008780	A	S251 alias; skuPage.FDPBT3244R (General/Product specifications); oem_spec	
Description	PRL4 branch three-pole fusible switch 200-200 A, 240 V, twin mount, switch height 6X 8.25 in; connector kit KPRL4B6XT (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (44.00 in box width required for both R and J fuse applications | Additional evidence: Fusible panelboard switch, FDPB, Unit 1: 200A, Unit 2: 200A, Three-pole, 240 Vac, 250 Vdc, 200 kAIC at 240 Vac, 10 kAIC at 250 Vdc, (1) #4-300 kcmil, Class R fuses, 60 hp at 240 Vac, 40 hp at 250 Vdc, Twin, horizontal, Branch [A, s_sku, skuPage.FDPBT3244R (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec	
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPBT3244R (General/Product specifications)])	A	S3 p.34; oem_spec	
Voltage rating	240 V (Additional evidence: 240 Vac, 250 Vdc [A, s_sku, skuPage.FDPBT3244R (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec	
Current rating	200-200 A (Additional evidence: Unit 1: 200A, Unit 2: 200A [A, s_sku, skuPage.FDPBT3244R (General/Product specifications)])	A	same as above	
Wire range	#4 AWG-300 kcmil; Fuse class provision; Class R fuses	A	S251 skuPage.FDPBT3244R (General/Product specifications); oem_spec	
Dimensions	Switch height 6X 8.25 in	A	S3 p.34 Table 48; oem_spec	
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPBT3244R (General/Product specifications); oem_spec	
Listing / approvals	UL Listed	A	S251 skuPage.FDPBT3244R (General/Product specifications); oem_spec	
Installation requirements	Pressure terminals supplied one per pole (Eaton web 'Catalog Notes')	A	same as above	
Package data (not part dims)	Eaton logistics attributes: length/depth 29.5 in, height 10 in, width 9.5 in, weight 35 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above	
Cross-links	Families: PRL4, PRL4X, FDP			
Not yet documented	fuse_class_detail, Material			

EDH-EAT-01210	FDPBT3644R	Eaton	switch-unit	STATUS UNKNOWN
PRL4 three-pole fusible switch 200-200 A, 600 V, twin (6X)				
OEM part number	FDPBT3644R	A	S3 oem_spec	
Alternate / superseded numbers	KPRL4FDPBT3644R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference	
Description	PRL4 branch three-pole fusible switch 200-200 A, 600 V, twin mount, switch height 6X 8.25 in; connector kit KPRL4B6XT (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (44.00 in box width required for both R and J fuse applications)	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec	
Poles	3	A	S3 p.34; oem_spec	
Voltage rating	600 V	A	S3 p.34 Table 48; oem_spec	
Current rating	200-200 A	A	same as above	
Dimensions	Switch height 6X 8.25 in	A	same as above	
Cross-links	Families: PRL4, PRL4X, FDP			
Not yet documented	fuse_class_detail, Material			

EDH-EAT-01211	FDPW325R	Eaton	switch-unit	ACTIVE EATON PRODUCT P
PRL4 three-pole fusible switch 400 A, 240 V, single (9X)				
OEM part number	FDPW325R	A	S3 oem_spec	

Alternate / superseded numbers	KPRL4FDPW325R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
	UPC 786679913253	A	S251 alias; skuPage.FDPW325R (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 400 A, 240 V, single mount, switch height 9X 12.38 in; connector kit KPRL4W9X (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (Additional evidence: Fusible panelboard switch, FDPW, 400A, Three-pole, 240 Vac, 250 Vdc, 200 kAIC at 240 Vac, 10 kAIC at 250 Vdc, 250-750 MCM or (2) 3/0-250 MCM, Class R fuses, 125 hp at 240 Vac, 50 hp at 250 Vdc, Single, horizontal, Branch [A, s_sku, skuPage.FDPW325R (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPW325R (General/Product specifications)])	A	S3 p.34; oem_spec
Voltage rating	240 V (Additional evidence: 240 Vac, 250 Vdc [A, s_sku, skuPage.FDPW325R (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec
Current rating	400 A (Additional evidence: 400A [A, s_sku, skuPage.FDPW325R (General/Product specifications)])	A	same as above
Kit contents	FDPW (Eaton web 'Special features' attribute)	A	S251 skuPage.FDPW325R (General/Product specifications); oem_spec
Wire range	(1) 250-750 kcmil or (2) #3/0 AWG-250 kcmil; Fuse class provision; Class R fuses	A	same as above
Dimensions	Switch height 9X 12.38 in	A	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPW325R (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.FDPW325R (General/Product specifications); oem_spec
Installation requirements	For cable-in/cable-out application of a branch switch, additional terminals are required. Order terminal kit TA750FDPW. Kit contains 3 terminals and hardware (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 25 in, height 10.5 in, width 16.5 in, weight 45.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01213	**FDPW326R**	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 600 A, 240 V, single (11X)

OEM part number	FDPW326R	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPW326R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
	UPC 786679783917	A	S251 alias; skuPage.FDPW326R (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 600 A, 240 V, single mount, switch height 11X 15.13 in; connector kit KPRL4W11X (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (Additional evidence: Fusible panelboard switch, FDPW, 600A, Three-pole, 240 Vac, 200 kAIC, (2) #4-600 MCM or (4) 3/0-250 MCM, Class R fuses, 200 hp at 240 Vac, Single, horizontal, Branch [A, s_sku, skuPage.FDPW326R (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPW326R (General/Product specifications)])	A	S3 p.34; oem_spec
Voltage rating	240 V (Additional evidence: 240V [A, s_sku, skuPage.FDPW326R (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec
Current rating	600 A (Additional evidence: 600A [A, s_sku, skuPage.FDPW326R (General/Product specifications)])	A	same as above
Kit contents	FDPW (Eaton web 'Special features' attribute)	A	S251 skuPage.FDPW326R (General/Product specifications); oem_spec
Wire range	(2) #4 AWG-600 kcmil or (4) #3/0 AWG-250 kcmil; Fuse class provision; Class R fuses	A	same as above
Dimensions	Switch height 11X 15.13 in	A	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPW326R (General/Product specifications); oem_spec

Listing / approvals	UL Listed	A	S251 skuPage.FDPW326R (General/Product specifications); oem_spec
Installation requirements	For cable-in/cable-out application of a branch switch, additional terminals are required. Order quantity 2 of terminal kit TA750FDPW. Each kit contains 3 terminals and hardware (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 25 in, height 10.5 in, width 16.5 in, weight 51.7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01215	FDPW327	Eaton	switch-unit	STATUS UNKNOWN

PRL4 three-pole fusible switch 800 A, 240 V, single (11X)

OEM part number	FDPW327	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPW327 (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
Description	PRL4 branch three-pole fusible switch 800 A, 240 V, single mount, switch height 11X 15.13 in; connector kit KPRL4W11X (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (44.00 in box width required for both R and J fuse applications)	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3	A	S3 p.34; oem_spec
Voltage rating	240 V	A	S3 p.34 Table 48; oem_spec
Current rating	800 A	A	same as above
Dimensions	Switch height 11X 15.13 in	A	same as above
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01217	FDPW328	Eaton	switch-unit	STATUS UNKNOWN

PRL4 three-pole fusible switch 1200 A, 240 V, single (15X)

OEM part number	FDPW328	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPW328 (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
Description	PRL4 branch three-pole fusible switch 1200 A, 240 V, single mount, switch height 15X 20.63 in; connector kit KPRL4W15X (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (44.00 in box width required for both R and J fuse applications)	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3	A	S3 p.34; oem_spec
Voltage rating	240 V	A	S3 p.34 Table 48; oem_spec
Current rating	1200 A	A	same as above
Dimensions	Switch height 15X 20.63 in	A	same as above
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01212	FDPW365R	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 400 A, 600 V, single (9X)

OEM part number	FDPW365R	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPW365R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
	UPC 786679913659	A	S251 alias; skuPage.FDPW365R (General/Product specifications); oem_spec

Description	PRL4 branch three-pole fusible switch 400 A, 600 V, single mount, switch height 9X 12.38 in; connector kit KPRL4W9X (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (Additional evidence: Eaton Fusible panelboard switch, FDPW, 400A, Three-pole, 600 Vac, 200 kAIC, 250-750 MCM or (2) 3/0-250 MCM, Class R fuses, 125 hp at 240 Vac, 250 hp at 480 Vac, 350 hp at 600 Vac, Single, horizontal, Branch [A, s_sku, skuPage.FDPW365R (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPW365R (General/Product specifications)])	A	S3 p.34; oem_spec
Voltage rating	600 V (Additional evidence: 600 V [A, s_sku, skuPage.FDPW365R (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec
Current rating	400 A (Additional evidence: 400A [A, s_sku, skuPage.FDPW365R (General/Product specifications)])	A	same as above
Kit contents	FDPW (Eaton web 'Special features' attribute)	A	S251 skuPage.FDPW365R (General/Product specifications); oem_spec
Wire range	(1) 250-750 kcmil or (2) #3/0 AWG-250 kcmil; Fuse class provision; Class R fuses	A	same as above
Dimensions	Switch height 9X 12.38 in	A	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPW365R (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.FDPW365R (General/Product specifications); oem_spec
Installation requirements	For cable-in/cable-out application of a branch switch, additional terminals are required. Order terminal kit TA750FDPW. Kit contains 3 terminals and hardware (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 25 in, height 10.5 in, width 16.5 in, weight 50.6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01214	**FDPW366R**	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 600 A, 600 V, single (11X)

OEM part number	FDPW366R	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPW366R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
	UPC 786679783924	A	S251 alias; skuPage.FDPW366R (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 600 A, 600 V, single mount, switch height 11X 15.13 in; connector kit KPRL4W11X (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (Additional evidence: Fusible panelboard switch, FDPW, 600A, Three-pole, 600 Vac, 200 kAIC, (2) #4-600 MCM or (4) 3/0-250 MCM, Class R fuses, 200 hp at 240 Vac, 400 hp at 480 Vac, 500 hp at 600 Vac, Single, horizontal, Branch [A, s_sku, skuPage.FDPW366R (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPW366R (General/Product specifications)])	A	S3 p.34; oem_spec
Voltage rating	600 V (Additional evidence: 600 V [A, s_sku, skuPage.FDPW366R (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec
Current rating	600 A (Additional evidence: 600A [A, s_sku, skuPage.FDPW366R (General/Product specifications)])	A	same as above
Kit contents	FDPW fusible panelboard switch (Eaton web 'Special features' attribute)	A	S251 skuPage.FDPW366R (General/Product specifications); oem_spec
Wire range	(2) #4 AWG-600 kcmil or (4) #3/0 AWG-250 kcmil; Fuse class provision; Class R fuses	A	same as above
Dimensions	Switch height 11X 15.13 in	A	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPW366R (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.FDPW366R (General/Product specifications); oem_spec

Installation requirements	For cable-in/cable-out application of a branch switch, additional terminals are required. Order quantity 2 of terminal kit TA750FDPW. Each kit contains 3 terminals and hardware (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 25 in, height 10.5 in, width 16.5 in, weight 51 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01216	FDPW367	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 800 A, 600 V, single (11X)

OEM part number	FDPW367	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPW367 (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
	UPC 786679783115	A	S251 alias; skuPage.FDPW367 (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 800 A, 600 V, single mount, switch height 11X 15.13 in; connector kit KPRL4W11X (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (44.00 in box width required for both R and J fuse applications | Additional evidence: Eaton Fusible panelboard switch, FDPW, 800A, Three-pole, 600 Vac, 200 kAIC, (3) 250-750 MCM or (6) 3/0-250 MCM, Class L fuses, Single, horizontal, Branch [A, s_sku, skuPage.FDPW367 (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPW367 (General/Product specifications)])	A	S3 p.34; oem_spec
Voltage rating	600 V (Additional evidence: 600 V [A, s_sku, skuPage.FDPW367 (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec
Current rating	800 A (Additional evidence: 800A [A, s_sku, skuPage.FDPW367 (General/Product specifications)])	A	same as above
Kit contents	FDPW fusible panelboard switch (Eaton web 'Special features' attribute)	A	S251 skuPage.FDPW367 (General/Product specifications); oem_spec
Wire range	(3) 250-750 kcmil or (6) #3/0 AWG-250 kcmil; Fuse class provision; Class L fuses	A	same as above
Dimensions	Switch height 11X 15.13 in	A	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPW367 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.FDPW367 (General/Product specifications); oem_spec
Installation requirements	For cable-in/cable-out application of a branch switch, additional terminals are required. Order quantity 3 of terminal kit TA750FDPW. Each kit contains 3 terminals and hardware (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 25 in, height 11 in, width 17 in, weight 56 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01218	FDPW368	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 1200 A, 600 V, single (15X)

OEM part number	FDPW368	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPW368 (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
	UPC 786679913949	A	S251 alias; skuPage.FDPW368 (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 1200 A, 600 V, single mount, switch height 15X 20.63 in; connector kit KPRL4W15X (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (44.00 in box width required for both R and J fuse applications | Additional evidence: Eaton Type FDPW Fusible Panelboard Switch, 1200A, Three-pole, 600 Vac, 200 kAIC, (4) 250-750 MCM or (8) 3/0-250 MCM, Class L fuses, Single, horizontal, Branch [A, s_sku, skuPage.FDPW368 (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPW368 (General/Product specifications)])	A	S3 p.34; oem_spec
Voltage rating	600 V (Additional evidence: 600 V [A, s_sku, skuPage.FDPW368 (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec
Current rating	1200 A (Additional evidence: 1200A [A, s_sku, skuPage.FDPW368 (General/Product specifications)])	A	same as above
Kit contents	EATON FUSIBLE PANELBOARD SWITCH (Eaton web 'Special features' attribute)	A	S251 skuPage.FDPW368 (General/Product specifications); oem_spec
Wire range	(4) 250-750 kcmil or (8) #3/0 AWG-250 kcmil; Fuse class provision; Class L fuses	A	same as above
Dimensions	Switch height 15X 20.63 in	A	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPW368 (General/Product specifications); oem_spec
Installation requirements	For cable-in/cable-out application of a branch switch, additional terminals are required. Order quantity 4 of terminal kit TA750FDPW. Each kit contains 3 terminals and hardware (Eaton web 'Catalog Notes')	A	S251 skuPage.FDPW368 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 24.5 in, height 10.5 in, width 24.5 in, weight 35 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01201	FDPWT3211R	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 30-30 A, 240 V, twin (4X)

OEM part number	FDPWT3211R	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPWT3211R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
	UPC 786679914205	A	S251 alias; skuPage.FDPWT3211R (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 30-30 A, 240 V, twin mount, switch height 4X 5.50 in; connector kit — (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (Additional evidence: Fusible panelboard switch, FDPW, Unit 1: 30A, Unit 2: 30A, Three-pole, 240 Vac, 250 Vdc, 200 kAIC at 240 Vac, 10 kAIC at 250 Vdc, #14-1/0, Class R fuses, 7.5 hp at 240 Vac, 5 hp at 250 Vdc, Twin, horizontal, Branch [A, s_sku, skuPage.FDPWT3211R (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPWT3211R (General/Product specifications)])	A	S3 p.34; oem_spec
Voltage rating	240 V (Additional evidence: 240 Vac, 250 Vdc [A, s_sku, skuPage.FDPWT3211R (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec
Current rating	30-30 A (Additional evidence: Unit 1: 30A, Unit 2: 30A [A, s_sku, skuPage.FDPWT3211R (General/Product specifications)])	A	same as above
Kit contents	FDPW fusible panelboard switch (Eaton web 'Special features' attribute)	A	S251 skuPage.FDPWT3211R (General/Product specifications); oem_spec
Wire range	#14-1/0 AWG; Fuse class provision; Class R fuses	A	same as above
Dimensions	Switch height 4X 5.50 in	A	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPWT3211R (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.FDPWT3211R (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 22 in, height 10 in, width 8 in, weight 15.73 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01203	FDPWT3222R	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 60-60 A, 240 V, twin (4X)

OEM part number	FDPWT3222R	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPWT3222R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
	UPC 786679651612	A	S251 alias; skuPage.FDPWT3222R (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 60-60 A, 240 V, twin mount, switch height 4X 5.50 in; connector kit KPRL44X (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (Additional evidence: Fusible panelboard switch, FDPW, Unit 1: 60A, Unit 2: 60A, Three-pole, 240 Vac, 250 Vdc, 200 kAIC at 240 Vac, 10 kAIC at 250 Vdc, #14-1/0, Class R fuses, 15 hp at 240 Vac, 10 hp at 250 Vdc, Twin, horizontal, Branch [A, s_sku, skuPage.FDPWT3222R (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPWT3222R (General/Product specifications)])	A	S3 p.34; oem_spec
Voltage rating	240 V (Additional evidence: 240 Vac, 250 Vdc [A, s_sku, skuPage.FDPWT3222R (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec
Current rating	60-60 A (Additional evidence: Unit 1: 60A, Unit 2: 60A [A, s_sku, skuPage.FDPWT3222R (General/Product specifications)])	A	same as above
Kit contents	FDPW fusible panelboard switch (Eaton web 'Special features' attribute)	A	S251 skuPage.FDPWT3222R (General/Product specifications); oem_spec
Wire range	#14-1/0 AWG; Fuse class provision; Class R fuses	A	same as above
Dimensions	Switch height 4X 5.50 in	A	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPWT3222R (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 26.4 in, height 10.3 in, width 8.1 in, weight 16.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	S251 skuPage.FDPWT3222R (General/Product specifications); oem_spec
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01205	FDPWT3233R	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 100-100 A, 240 V, twin (4X)

OEM part number	FDPWT3233R	**A**	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPWT3233R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	**B**	S3 equivalent; p.35 Table 54; inference
	UPC 786679651568	**A**	S251 alias; skuPage.FDPWT3233R (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 100-100 A, 240 V, twin mount, switch height 4X 5.50 in; connector kit — (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (Additional evidence: Eaton Fusible panelboard switch, FDPW, Unit 1: 100A, Unit 2: 100A, Three-pole, 240 Vac, 250 Vdc, 200 kAIC at 240 Vac, 10 kAIC at 250 Vdc, #14-1/0, Class R fuses, 30 hp at 240 Vac, 20 hp at 250 Vdc, Twin, horizontal, Branch [A, s_sku, skuPage.FDPWT3233R (General/Product specifications)])	**A**	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPWT3233R (General/Product specifications)])	**A**	S3 p.34; oem_spec
Voltage rating	240 V (Additional evidence: 240 Vac, 250 Vdc [A, s_sku, skuPage.FDPWT3233R (General/Product specifications)])	**A**	S3 p.34 Table 48; oem_spec
Current rating	100-100 A (Additional evidence: Unit 1: 100A, Unit 2: 100A [A, s_sku, skuPage.FDPWT3233R (General/Product specifications)])	**A**	same as above
Kit contents	FDPW fusible panelboard switch (Eaton web 'Special features' attribute)	**A**	S251 skuPage.FDPWT3233R (General/Product specifications); oem_spec
Wire range	#14-1/0 AWG; Fuse class provision; Class R fuses	**A**	same as above
Dimensions	Switch height 4X 5.50 in	**A**	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.FDPWT3233R (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 22.5 in, height 10 in, width 8 in, weight 17.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	S251 skuPage.FDPWT3233R (General/Product specifications); oem_spec
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01202	FDPWT3611R	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 30-30 A, 600 V, twin (4X)

OEM part number	FDPWT3611R	**A**	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPWT3611R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	**B**	S3 equivalent; p.35 Table 54; inference
	UPC 786679651520	**A**	S251 alias; skuPage.FDPWT3611R (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 30-30 A, 600 V, twin mount, switch height 4X 5.50 in; connector kit — (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (Additional evidence: Fusible panelboard switch, FDPW, Unit 1: 30A, Unit 2: 30A, Three-pole, 600 Vac, 200 kAIC, #14-1/0, Class R fuses, 7.5 hp at 240 Vac, 15 hp at 480 Vac, 20 hp at 600 Vac, Twin, horizontal, Branch [A, s_sku, skuPage.FDPWT3611R (General/Product specifications)])	**A**	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPWT3611R (General/Product specifications)])	**A**	S3 p.34; oem_spec
Voltage rating	600 V (Additional evidence: 600 V [A, s_sku, skuPage.FDPWT3611R (General/Product specifications)])	**A**	S3 p.34 Table 48; oem_spec
Current rating	30-30 A (Additional evidence: Unit 1: 30A, Unit 2: 30A [A, s_sku, skuPage.FDPWT3611R (General/Product specifications)])	**A**	same as above
Kit contents	FDPW fusible panelboard switch (Eaton web 'Special features' attribute)	**A**	S251 skuPage.FDPWT3611R (General/Product specifications); oem_spec
Wire range	#14-1/0 AWG; Fuse class provision; Class R fuses	**A**	same as above
Dimensions	Switch height 4X 5.50 in	**A**	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.FDPWT3611R (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 22.5 in, height 10.3 in, width 8 in, weight 16.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	S251 skuPage.FDPWT3611R (General/Product specifications); oem_spec
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01204	FDPWT3622R	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 60-60 A, 600 V, twin (4X)

OEM part number	FDPWT3622R	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPWT3622R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
	UPC 786679651544	A	S251 alias; skuPage.FDPWT3622R (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 60-60 A, 600 V, twin mount, switch height 4X 5.50 in; connector kit KPRL44X (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (Additional evidence: Fusible panelboard switch, FDPW, Unit 1: 60A, Unit 2: 60A, Three-pole, 600 Vac, 200 kAIC, #14-1/0, Class R fuses, 15 hp at 240 Vac, 30 hp at 480 Vac, 50 hp at 600 Vac, Twin, horizontal, Branch [A, s_sku, skuPage.FDPWT3622R (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPWT3622R (General/Product specifications)])	A	S3 p.34; oem_spec
Voltage rating	600 V (Additional evidence: 600 V [A, s_sku, skuPage.FDPWT3622R (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec
Current rating	60-60 A (Additional evidence: Unit 1: 60A, Unit 2: 60A [A, s_sku, skuPage.FDPWT3622R (General/Product specifications)])	A	same as above
Kit contents	FDPW fusible panelboard switch (Eaton web 'Special features' attribute)	A	S251 skuPage.FDPWT3622R (General/Product specifications); oem_spec
Wire range	#14-1/0 AWG; Fuse class provision; Class R fuses	A	same as above
Dimensions	Switch height 4X 5.50 in	A	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPWT3622R (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 22.5 in, height 10.3 in, width 8 in, weight 16.8 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	S251 skuPage.FDPWT3622R (General/Product specifications); oem_spec
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

EDH-EAT-01206	FDPWT3633R	Eaton	switch-unit	ACTIVE EATON PRODUCT P

PRL4 three-pole fusible switch 100-100 A, 600 V, twin (5X)

OEM part number	FDPWT3633R	A	S3 oem_spec
Alternate / superseded numbers	KPRL4FDPWT3633R (Retrofit kit (switch + connectors + hardware) number built from Eaton rule)	B	S3 equivalent; p.35 Table 54; inference
	UPC 786679651667	A	S251 alias; skuPage.FDPWT3633R (General/Product specifications); oem_spec
Description	PRL4 branch three-pole fusible switch 100-100 A, 600 V, twin mount, switch height 5X 6.88 in; connector kit KPRL45X1 (sold separately). Fusible retrofit kit = "KPRL4" + switch catalog number (e.g. KPRL4FDPWT3633R). (Additional evidence: Fusible panelboard switch, FDPW, Unit 1: 100A, Unit 2: 100A, Three-pole, 600 Vac, 200 kAIC, #14-1/0, Class R fuses, 30 hp at 240 Vac, 60 hp at 480 Vac, 75 hp at 600 Vac, Twin, Horizontal, Branch. [A, s_sku, skuPage.FDPWT3633R (General/Product specifications)])	A	S3 May 2022 p.34 Table 48, p.35 Tables 53-54; oem_spec
Poles	3 (Additional evidence: 3 [A, s_sku, skuPage.FDPWT3633R (General/Product specifications)])	A	S3 p.34; oem_spec
Voltage rating	600 V (Additional evidence: 600 V [A, s_sku, skuPage.FDPWT3633R (General/Product specifications)])	A	S3 p.34 Table 48; oem_spec
Current rating	100-100 A (Additional evidence: Unit 1: 100A, Unit 2: 100A [A, s_sku, skuPage.FDPWT3633R (General/Product specifications)])	A	same as above
Kit contents	FDPW fusible panelboard switch (Eaton web 'Special features' attribute)	A	S251 skuPage.FDPWT3633R (General/Product specifications); oem_spec
Wire range	#14-1/0 AWG; Fuse class provision; Class R fuses	A	same as above
Dimensions	Switch height 5X 6.88 in	A	S3 p.34 Table 48; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FDPWT3633R (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 26.25 in, height 10 in, width 8 in, weight 20 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	S251 skuPage.FDPWT3633R (General/Product specifications); oem_spec
Cross-links	Families: PRL4, PRL4X, FDP		
Not yet documented	fuse_class_detail, Material		

3.31 PRL4X — Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)

FAM-EAT-009 · panelboard · aka PRL4DX, PRL4x, Pow-R-Line 4X, Pow-R-Xpress PRL4X · markings: Eaton

Successor to PRL4B; renewal parts (blank covers, vented covers, KPRL4X/KPRL4* connector kits, retrofit kits) are listed jointly for PRL4X and PRL4 in RP01400001E (2021).

Attribute	Value	Cl.	Sources
Status	Current	A	S6 oem_spec
Era of manufacture	Introduced 2020	A	S1 p.2; oem_spec
Voltage rating	240, 480 or 600 Vac; 600 Vdc	A	S6 p.V2-T3-11; oem_spec
Main ampacity	MLO 1200 A; main device 1200 A	A	same as above
Branch breakers accepted	Breakers 15-1200 A (Power Defense PDG2-PDG5 plus legacy Series C/G frames via KPRL4 kits); fusible switches 30-1200 A (PRL4F)	A	S1, S6 oem_spec

Breaker families associated: Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3), Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S250 DG014003EN Design Guide DG014003EN Pow-R-Line 4X panelboards (Effective March 2025)

Also fits this family (entry printed elsewhere): PRLSEBGHB, PRLSEBPD3, PRLSEBPD2, 6572C746G01, 6554C01, 6554C02, 6574C74, KPRL4X12, KPRL4X22, KPRL4X32, KPRL4X334S, KPRL4X334T, KPRL4X336, KPRL4X34, KPRL4X35, KPRL4FDCL, KPRL4CA, KPRL4JDS, KPRL4JDT, KPRL4FBP, KPRL4KDS, KPRL4KDT, KPRL4LC, KPRL4LG, KPRL4MC, KPRL4LAP, KPRL4LCL, KPRL4NBP, KPRL4NC, KPRL4ND, KPRL4CKD, KPRL4MD, KPRL4CND, KPRL4FD1, KPRL4FD2, KPRL4ED2, KPRL4FD, KPRL4ED, KPRL4LD, KPRL44X, KPRL45X1, KPRL45X, KPRL45XS, KPRL4B6XS, KPRL4B6XT, KPRL4W9X, KPRL4W11X, KPRL4W15X, 1A32258H03, PRLSEBPD5, PRLSEBPD4, PRLSEBBAB, BX2457, 6574C74G02, 8708C82G02, LDD2457STW, LDD2457FTW, BX2473, 6574C74G03, 8708C82G03, LDD2473STW, LDD2473FTW, BX2490, 6574C74G04, 8708C82G04, LDD2490STW, LDD2490FTW, BX3673, 6574C74G05, 8708C82G05, LDD3673STW, LDD3673FTW, BX3690, 6574C74G06, 8708C82G06, LDD3690STW, LDD3690FTW, BX4473, 8708C82G07, LDD4473STW, LDD4473FTW, BX4490, 8708C82G08, LDD4490STW, LDD4490FTW, 6555C20H01, 6555C21H01, 6555C25H01, 6555C22H01, 6555C23H01, 6555C26H01, 6555C27H01, 6555C24H01, 6555C28H01, RPCB2457, DPC2457, RPCB2473, DPC2473, RPCB2490, DPC2490, RPCB3673, DPC3673, RPCB3690, DPC3690, 6554C01H01, 6554C02H01, 6554C01H02, 6554C02H02, 6554C01H03, 6554C02H03, 6554C01H13, 6554C02H13, 6554C01H14, 6554C02H14, 6554C01H04, 6554C02H04, 6554C01H05, 6554C02H05, 6554C01H06, 6554C02H06, 6554C01H07, 6554C02H07, 6554C01H08, 6554C02H08, 6554C01H09, 6554C02H09, 6554C01H10, 6554C02H10,

6554C01H11, 6554C02H11, 6554C01H12, 6554C02H12, FDPWT3211R, FDPWT3611R, FDPWT3222R, FDPWT3622R, FDPWT3233R, FDPWT3633R, FDPBS324R, FDPBS364R, FDPBT3244R, FDPBT3644R, FDPW325R, FDPW365R, FDPW326R, FDPW366R, FDPW327, FDPW367, FDPW328, FDPW368

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00297	**PRXP4PD2FILL1**	Pow-R-Xpress PRL4X PD2 1-pole filler	INTERIORS A	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00297	PRXP4PD2FILL1	Eaton	filler-plate	ACTIVE EATON PRODUCT P

Pow-R-Xpress PRL4X PD2 1-pole filler

OEM part number	PRXP4PD2FILL1	A	S11, S251 oem_spec
Alternate / superseded numbers	UPC 786689814915	A	S251 alias; skuPage.PRXP4PD2FILL1 (General/Product specifications); oem_spec
Description	EATON POW-R-XPRESS PRL4X PD2 1 POLE FILLER	A	same as above
	PRL4X PD2 1 pole filler (Pow-R-Xpress unassembled PRL4X panelboard)	C	S11 distributor
Breaker compatibility	INTERIORS (Eaton web 'Used with' attribute)	A	S251 skuPage.PRXP4PD2FILL1 (General/Product specifications); oem_spec
Poles	1	C	S11 distributor
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.PRXP4PD2FILL1 (General/Product specifications); oem_spec
	Distributor-listed (UPC 786689814915)	C	S11 distributor
Listing / approvals	UL 67	A	S251 skuPage.PRXP4PD2FILL1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.406 in, height 0.12 in, width 1.563 in, weight 0.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.32 PRL5P — Pow-R-Line 5P plug-on distribution panelboard

FAM-EAT-015 · panelboard · aka 5P, Pow-R-Line 5P · markings: Cutler-Hammer, Eaton

Plug-on distribution panelboard with single-bus (30 in box) or double-bus (48 in box) chassis; breakers supplied as complete adapter units (catalog 5P...).

Attribute	Value	Cl.	Sources
Status	Discontinued (dropped from 2021 renewal parts; in 2009 and 2017 editions)	B	S1, S2, S3 inference
Era of manufacture	Introduced August 1995	A	S2 p.2 Table 1; oem_spec
Main ampacity	Up to 1200 A (lug units 400/600/800 A single bus, 1200 A double bus)	A	S2 p.38; oem_spec
Branch breakers accepted	Plug-on adapter units with EHD..FDC, ED, JD, DK/KD, LD, MDL, ND (no 100% rated)	A	S2 p.37; oem_spec

Breaker families associated: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC)
Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S3 RP01400001E Renewal Parts RP01400001E - Current Eaton panelboards

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00377	**5PLUG31200TC**	PRL5P 600-1200 A lug unit, double-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition
EDH-EAT-00374	**5PLUG3400SC**	PRL5P 400 A main/through-feed lug unit, single-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00375	**5PLUG3600SC**	PRL5P 600 A lug unit, single-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition
EDH-EAT-00376	**5PLUG3800SC**	PRL5P 800 A lug unit, single-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition

EDH-EAT-00377 **5PLUG31200TC** Cutler-Hammer main-lug-kit **LISTED 2009 AND 2017;**

PRL5P 600-1200 A lug unit, double-bus chassis

OEM part number	5PLUG31200TC	A	S2, S3 s2 p.38 Table 47; oem_spec
Description	600-1200 A lug unit, double-bus chassis	A	S2 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (4) #4-750 kcmil	A	same as above
Dimensions	7X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00374 **5PLUG3400SC** Cutler-Hammer main-lug-kit **LISTED 2009 AND 2017;**

PRL5P 400 A main/through-feed lug unit, single-bus chassis

OEM part number	5PLUG3400SC	A	S2, S3 s2 p.38 Table 47; oem_spec
Description	400 A main/through-feed lug unit, single-bus chassis	A	S2 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (1) 1/0-500 or (2) 1/0-250 kcmil	A	same as above
Dimensions	8X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00375 **5PLUG3600SC** Cutler-Hammer main-lug-kit **LISTED 2009 AND 2017;**

PRL5P 600 A lug unit, single-bus chassis

OEM part number	5PLUG3600SC	A	S2, S3 s2 p.38 Table 47; oem_spec
Description	600 A lug unit, single-bus chassis	A	S2 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (2) 1/0-500 kcmil	A	same as above
Dimensions	8X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00376	5PLUG3800SC	Cutler-Hammer	main-lug-kit	LISTED 2009 AND 2017;

PRL5P 800 A lug unit, single-bus chassis

OEM part number	5PLUG3800SC	A	S2, S3 s2 p.38 Table 47; oem_spec
Description	800 A lug unit, single-bus chassis	A	S2 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (2) #2-500 or (3) #2-400 kcmil	A	same as above
Dimensions	8X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01200	**5PNL1200**	PRL5P additional neutral lug (4) 3/0-750 kcmil Al/Cu	—	unknown
EDH-EAT-01197	**5PNL400**	PRL5P additional neutral lug (1) 1/0-750 kcmil or (2) 1/0-300 kcmil Al/Cu	—	unknown
EDH-EAT-01198	**5PNL600**	PRL5P additional neutral lug (2) 250-500 kcmil Al/Cu	—	unknown
EDH-EAT-01199	**5PNL800**	PRL5P additional neutral lug (3) 3/0-750 kcmil Al/Cu	—	unknown

EDH-EAT-01200	5PNL1200	Cutler-Hammer	lug	STATUS UNKNOWN

PRL5P additional neutral lug (4) 3/0-750 kcmil Al/Cu

OEM part number	5PNL1200	A	S16 oem_spec
Description	PRL5P additional lugs for neutral assemblies: (4) 3/0-750 kcmil Al/Cu	A	S16 Oct 2017 p.34 Table 54; oem_spec
Cross-links	Families: PRL5P		
Not yet documented	Material, Torque values		

EDH-EAT-01197	5PNL400	Cutler-Hammer	lug	STATUS UNKNOWN

PRL5P additional neutral lug (1) 1/0-750 kcmil or (2) 1/0-300 kcmil Al/Cu

OEM part number	5PNL400	A	S16 oem_spec
Description	PRL5P additional lugs for neutral assemblies: (1) 1/0-750 kcmil or (2) 1/0-300 kcmil Al/Cu	A	S16 Oct 2017 p.34 Table 54; oem_spec
Cross-links	Families: PRL5P		
Not yet documented	Material, Torque values		

EDH-EAT-01198	5PNL600	Cutler-Hammer	lug	STATUS UNKNOWN

PRL5P additional neutral lug (2) 250-500 kcmil Al/Cu

OEM part number	5PNL600	A	S16 oem_spec
Description	PRL5P additional lugs for neutral assemblies: (2) 250-500 kcmil Al/Cu	A	S16 Oct 2017 p.34 Table 54; oem_spec
Cross-links	Families: PRL5P		
Not yet documented	Material, Torque values		

EDH-EAT-01199	5PNL800	Cutler-Hammer	lug	STATUS UNKNOWN

PRL5P additional neutral lug (3) 3/0-750 kcmil Al/Cu

OEM part number	5PNL800	A	S16 oem_spec
Description	PRL5P additional lugs for neutral assemblies: (3) 3/0-750 kcmil Al/Cu	A	S16 Oct 2017 p.34 Table 54; oem_spec
Cross-links	Families: PRL5P		
Not yet documented	Material, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00380	**5PN1200A**	PRL5P 1200 A neutral assembly, Al/Cu	—	PRL5P dropped from 2021 edition
EDH-EAT-00381	**5PN1200C**	PRL5P 1200 A neutral assembly, copper	—	PRL5P dropped from 2021 edition
EDH-EAT-00378	**5PN800A**	PRL5P 800 A neutral assembly, Al/Cu, (4) 250-500 kcmil	—	PRL5P dropped from 2021 edition
EDH-EAT-00379	**5PN800C**	PRL5P 800 A neutral assembly, copper, (4) 250-500 kcmil	—	PRL5P dropped from 2021 edition

EDH-EAT-00380	5PN1200A	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 1200 A neutral assembly, Al/Cu

OEM part number	5PN1200A	A	S2 p.39 Table 48; oem_spec
Description	1200 A neutral assembly, Al/Cu	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00381	5PN1200C	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 1200 A neutral assembly, copper

OEM part number	5PN1200C	A	S2 p.39 Table 48; oem_spec
Description	1200 A neutral assembly, copper	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00378	5PN800A	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 800 A neutral assembly, Al/Cu, (4) 250-500 kcmil

OEM part number	5PN800A	A	S2 p.39 Table 48; oem_spec
Description	800 A neutral assembly, Al/Cu, (4) 250-500 kcmil	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00379	5PN800C	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 800 A neutral assembly, copper, (4) 250-500 kcmil

OEM part number	5PN800C	A	S2 p.39 Table 48; oem_spec
Description	800 A neutral assembly, copper, (4) 250-500 kcmil	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00382	**5PG1200A**	PRL5P 1200 A ground bar, Al/Cu	—	PRL5P dropped from 2021 edition
EDH-EAT-00383	**5PG1200C**	PRL5P 1200 A ground bar, copper	—	PRL5P dropped from 2021 edition

EDH-EAT-00382	5PG1200A	Cutler-Hammer	ground-bar	PRL5P DROPPED FROM 202

PRL5P 1200 A ground bar, Al/Cu

OEM part number	5PG1200A	A	S2 p.39 Table 48; oem_spec
Description	1200 A ground bar, Al/Cu	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00383	5PG1200C	Cutler-Hammer	ground-bar	PRL5P DROPPED FROM 202

PRL5P 1200 A ground bar, copper

OEM part number	5PG1200C	A	S2 p.39 Table 48; oem_spec
Description	1200 A ground bar, copper	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00384	**5PFP1S**	PRL5P 1X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00385	**5PFP1T**	PRL5P 1X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00386	**5PFP2S**	PRL5P 2X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00387	**5PFP2T**	PRL5P 2X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00388	**5PFP3S**	PRL5P 3X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00389	**5PFP3T**	PRL5P 3X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00390	**5PFP4S**	PRL5P 4X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00391	**5PFP4T**	PRL5P 4X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00392	**5PFP5S**	PRL5P 5X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00393	**5PFP5T**	PRL5P 5X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00394	**5PFP6S**	PRL5P 6X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00395	**5PFP6T**	PRL5P 6X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition

EDH-EAT-00384	5PFP1S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 1X deadfront filler plate, single-bus chassis

OEM part number	5PFP1S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 1X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	1X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00385	5PFP1T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 1X deadfront filler plate, double-bus chassis

OEM part number	5PFP1T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 1X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	1X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00386	5PFP2S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 2X deadfront filler plate, single-bus chassis

OEM part number	5PFP2S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 2X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	2X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00387	5PFP2T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 2X deadfront filler plate, double-bus chassis

OEM part number	5PFP2T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 2X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	2X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00388	5PFP3S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 3X deadfront filler plate, single-bus chassis

OEM part number	5PFP3S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 3X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	3X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00389	5PFP3T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 3X deadfront filler plate, double-bus chassis

OEM part number	5PFP3T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 3X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	3X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00390	5PFP4S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 4X deadfront filler plate, single-bus chassis

OEM part number	5PFP4S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 4X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	4X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00391	5PFP4T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 4X deadfront filler plate, double-bus chassis

OEM part number	5PFP4T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 4X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	4X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00392	5PFP5S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 5X deadfront filler plate, single-bus chassis

OEM part number	5PFP5S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 5X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	5X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00393	5PFP5T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 5X deadfront filler plate, double-bus chassis

OEM part number	5PFP5T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 5X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	5X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00394	5PFP6S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 6X deadfront filler plate, single-bus chassis

OEM part number	5PFP6S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 6X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	6X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00395	5PFP6T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 6X deadfront filler plate, double-bus chassis

OEM part number	5PFP6T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 6X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	6X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01181	**5PD24S**	PRL5P trim door kit, 24X chassis, 30.00 in (762.0 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01184	**5PD24T**	PRL5P trim door kit, 24X chassis, 48.00 in (1219.2 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01187	**5PD32S**	PRL5P trim door kit, 32X chassis, 30.00 in (762.0 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01190	**5PD32T**	PRL5P trim door kit, 32X chassis, 48.00 in (1219.2 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01193	**5PD40S**	PRL5P trim door kit, 40X chassis, 30.00 in (762.0 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01196	**5PD40T**	PRL5P trim door kit, 40X chassis, 48.00 in (1219.2 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01180	**5PT2430S**	PRL5P trim, 24X chassis, 30.00 in (762.0 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01183	**5PT2448S**	PRL5P trim, 24X chassis, 48.00 in (1219.2 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01186	**5PT3230S**	PRL5P trim, 32X chassis, 30.00 in (762.0 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01189	**5PT3248S**	PRL5P trim, 32X chassis, 48.00 in (1219.2 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01192	**5PT4030S**	PRL5P trim, 40X chassis, 30.00 in (762.0 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01195	**5PT4048S**	PRL5P trim, 40X chassis, 48.00 in (1219.2 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021

EDH-EAT-01181 — 5PD24S — Cutler-Hammer — trim

PRL5P PARTS APPEAR IN

PRL5P trim door kit, 24X chassis, 30.00 in (762.0 mm) wide

OEM part number	5PD24S	A	S16 oem_spec
Description	PRL5P trim door kit for 24X chassis, 30.00 in (762.0 mm) wide, single bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01184 — 5PD24T — Cutler-Hammer — trim

PRL5P PARTS APPEAR IN

PRL5P trim door kit, 24X chassis, 48.00 in (1219.2 mm) wide

OEM part number	5PD24T	A	S16 oem_spec
Description	PRL5P trim door kit for 24X chassis, 48.00 in (1219.2 mm) wide, double bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01187 — 5PD32S — Cutler-Hammer — trim

PRL5P PARTS APPEAR IN

PRL5P trim door kit, 32X chassis, 30.00 in (762.0 mm) wide

OEM part number	5PD32S	A	S16 oem_spec
Description	PRL5P trim door kit for 32X chassis, 30.00 in (762.0 mm) wide, single bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01190	5PD32T	Cutler-Hammer	trim	PRL5P PARTS APPEAR IN

PRL5P trim door kit, 32X chassis, 48.00 in (1219.2 mm) wide

OEM part number	5PD32T	A	S16 oem_spec
Description	PRL5P trim door kit for 32X chassis, 48.00 in (1219.2 mm) wide, double bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01193	5PD40S	Cutler-Hammer	trim	PRL5P PARTS APPEAR IN

PRL5P trim door kit, 40X chassis, 30.00 in (762.0 mm) wide

OEM part number	5PD40S	A	S16 oem_spec
Description	PRL5P trim door kit for 40X chassis, 30.00 in (762.0 mm) wide, single bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01196	5PD40T	Cutler-Hammer	trim	PRL5P PARTS APPEAR IN

PRL5P trim door kit, 40X chassis, 48.00 in (1219.2 mm) wide

OEM part number	5PD40T	A	S16 oem_spec
Description	PRL5P trim door kit for 40X chassis, 48.00 in (1219.2 mm) wide, double bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01180	5PT2430S	Cutler-Hammer	trim	PRL5P PARTS APPEAR IN

PRL5P trim, 24X chassis, 30.00 in (762.0 mm) wide

OEM part number	5PT2430S	A	S16 oem_spec
Description	PRL5P trim for 24X chassis, 30.00 in (762.0 mm) wide, single bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01183	5PT2448S	Cutler-Hammer	trim	PRL5P PARTS APPEAR IN

PRL5P trim, 24X chassis, 48.00 in (1219.2 mm) wide

OEM part number	5PT2448S	A	S16 oem_spec
Description	PRL5P trim for 24X chassis, 48.00 in (1219.2 mm) wide, double bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01186	5PT3230S	Cutler-Hammer	trim	PRL5P PARTS APPEAR IN

PRL5P trim, 32X chassis, 30.00 in (762.0 mm) wide

OEM part number	5PT3230S	A	S16 oem_spec
Description	PRL5P trim for 32X chassis, 30.00 in (762.0 mm) wide, single bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01189	5PT3248S	Cutler-Hammer	trim	PRL5P PARTS APPEAR IN

PRL5P trim, 32X chassis, 48.00 in (1219.2 mm) wide

OEM part number	5PT3248S	A	S16 oem_spec
Description	PRL5P trim for 32X chassis, 48.00 in (1219.2 mm) wide, double bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01192	5PT4030S	Cutler-Hammer	trim	PRL5P PARTS APPEAR IN

PRL5P trim, 40X chassis, 30.00 in (762.0 mm) wide

OEM part number	5PT4030S	A	S16 oem_spec
Description	PRL5P trim for 40X chassis, 30.00 in (762.0 mm) wide, single bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01195	5PT4048S	Cutler-Hammer	trim	PRL5P PARTS APPEAR IN

PRL5P trim, 40X chassis, 48.00 in (1219.2 mm) wide

OEM part number	5PT4048S	A	S16 oem_spec
Description	PRL5P trim for 40X chassis, 48.00 in (1219.2 mm) wide, double bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01179	**5PB2430G**	PRL5P back box, 24X chassis, 30.00 in (762.0 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01182	**5PB2448G**	PRL5P back box, 24X chassis, 48.00 in (1219.2 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01185	**5PB3230G**	PRL5P back box, 32X chassis, 30.00 in (762.0 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01188	**5PB3248G**	PRL5P back box, 32X chassis, 48.00 in (1219.2 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01191	**5PB4030G**	PRL5P back box, 40X chassis, 30.00 in (762.0 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021
EDH-EAT-01194	**5PB4048G**	PRL5P back box, 40X chassis, 48.00 in (1219.2 mm) wide	—	PRL5P parts appear in Oct 2017 edition but not in April 2021

EDH-EAT-01179	5PB2430G	Cutler-Hammer	box/enclosure	PRL5P PARTS APPEAR IN

PRL5P back box, 24X chassis, 30.00 in (762.0 mm) wide

OEM part number	5PB2430G	A	S16 oem_spec
Description	PRL5P back box for 24X chassis, 30.00 in (762.0 mm) wide, single bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01182	5PB2448G	Cutler-Hammer	box/enclosure	PRL5P PARTS APPEAR IN

PRL5P back box, 24X chassis, 48.00 in (1219.2 mm) wide

OEM part number	5PB2448G	A	S16 oem_spec
Description	PRL5P back box for 24X chassis, 48.00 in (1219.2 mm) wide, double bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01185	5PB3230G	Cutler-Hammer	box/enclosure	PRL5P PARTS APPEAR IN

PRL5P back box, 32X chassis, 30.00 in (762.0 mm) wide

OEM part number	5PB3230G	A	S16 oem_spec
Description	PRL5P back box for 32X chassis, 30.00 in (762.0 mm) wide, single bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01188	5PB3248G	Cutler-Hammer	box/enclosure	PRL5P PARTS APPEAR IN

PRL5P back box, 32X chassis, 48.00 in (1219.2 mm) wide

OEM part number	5PB3248G	A	S16 oem_spec
Description	PRL5P back box for 32X chassis, 48.00 in (1219.2 mm) wide, double bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01191	5PB4030G	Cutler-Hammer	box/enclosure	PRL5P PARTS APPEAR IN

PRL5P back box, 40X chassis, 30.00 in (762.0 mm) wide

OEM part number	5PB4030G	A	S16 oem_spec
Description	PRL5P back box for 40X chassis, 30.00 in (762.0 mm) wide, single bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

EDH-EAT-01194	5PB4048G	Cutler-Hammer	box/enclosure	PRL5P PARTS APPEAR IN

PRL5P back box, 40X chassis, 48.00 in (1219.2 mm) wide

OEM part number	5PB4048G	A	S16 oem_spec
Description	PRL5P back box for 40X chassis, 48.00 in (1219.2 mm) wide, double bus chassis	A	S16 Oct 2017 p.34 Table 56; oem_spec
Status	PRL5P parts appear in Oct 2017 edition but not in April 2021 / May 2022 editions of RP01400001E	B	S16, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00398	**5PCGBLD600S**	PRL5P grounded B-phase adapter kit, 600 A LD main breaker, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00401	**5PCGBLUG1200T**	PRL5P grounded B-phase adapter kit, 1200 A main lugs, double bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00396	**5PCGBLUG400S**	PRL5P grounded B-phase adapter kit, 400 A main lugs, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00397	**5PCGBLUG600S**	PRL5P grounded B-phase adapter kit, 600 A main lugs, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00399	**5PCGBLUG800S**	PRL5P grounded B-phase adapter kit, 800 A main lugs, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00400	**5PCGBMD800T**	PRL5P grounded B-phase adapter kit, 800 A MD main breaker, double bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00402	**5PCGBND1200T**	PRL5P grounded B-phase adapter kit, 1200 A ND main breaker, double bus	—	PRL5P dropped from 2021 edition

EDH-EAT-00398	5PCGBLD600S	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 600 A LD main breaker, single bus

OEM part number	5PCGBLD600S	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 600 A LD main breaker, single bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00401	5PCGBLUG1200T	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 1200 A main lugs, double bus

OEM part number	5PCGBLUG1200T	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 1200 A main lugs, double bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00396	5PCGBLUG400S	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 400 A main lugs, single bus

OEM part number	5PCGBLUG400S	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 400 A main lugs, single bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00397	5PCGBLUG600S	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 600 A main lugs, single bus

OEM part number	5PCGBLUG600S	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 600 A main lugs, single bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00399	5PCGBLUG800S	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 800 A main lugs, single bus

OEM part number	5PCGBLUG800S	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 800 A main lugs, single bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00400	5PCGBMD800T	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 800 A MD main breaker, double bus

OEM part number	5PCGBMD800T	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 800 A MD main breaker, double bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00402	5PCGBND1200T	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 1200 A ND main breaker, double bus

OEM part number	5PCGBND1200T	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 1200 A ND main breaker, double bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.33 WEB — Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards

FAM-EAT-023 · panelboard · aka WEB, WCA, WEHB, WFB, HWFB, WGB, WGHB · markings: Westinghouse

Westinghouse 1937-1988 era panelboards named for their branch breaker (E-frame, CA, F-frame, G-frame). PRL3 connector kits (KPRL3FD, KPRL3ED, KPRL3CA) fit WEB, WCA, WEHB, WFB and HWFB.

Attribute	Value	Cl.	Sources
Status	discontinued; replacement panelboard type PRL3a (WGB/WGHB -> PRL2a)	A	S13 p. V12-T4-7; oem_spec
Branch breakers accepted	WEB: EB (-> EB, EHD); WEHB: EHB; WFB: FB (-> FB, FDB); WCA: CA; WGB: GB; WGHB: GHB	A	same as above
Kit fit	The PRL3 connector kits will fit the following panelboards: WEB, WCA, WEHB, WFB, and HWFB	A	S14 p. 7 note; oem_spec

Breaker families associated: EB, EHB, FB, HFB

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD

Also fits this family (entry printed elsewhere): KPRL3FD, KPRL3ED, KPRL3CA

3.34 ES — Cutler-Hammer Type ES switchboard

FAM-EAT-019 · switchboard · aka ES switchboard, Type ES · markings: Cutler-Hammer

Cutler-Hammer branded service distribution switchboard using Westinghouse molded-case breakers under the 1960s supply agreement. Existing ES lineups can be extended with new Pow-R-Line C structures through a transition section.

Attribute	Value	Cl.	Sources
Status	discontinued (Vol 12 lists as legacy; new PRLC can connect via transition section)	A	S13 p. V12-T15-5; oem_spec
Era of manufacture	Introduced 1991 by Cutler-Hammer as replacement for their version of WF/WRP; Mullenbach (1962) heritage; used exclusively Westinghouse MCCBs	A	same as above
Voltage rating	120-600 V	A	same as above
Main ampacity	ES switchboard bus 600-4000 A; devices 15-4000 A; 10-200 kA	A	same as above

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions

Also fits this family (entry printed elsewhere): EEEHD220015SB2, EEFPB1S1, EEFPB2T2, EEFPB2S1, EEFPB2S2W, EEFPB2S2N, EEFPB3S2W, EEFPB3S2N, EEFPB4T2, EEFPB4S1, EEFPB4S2W, EEFPB4S2N, EEFPB5S1, EEFPB5S2W, EEFPB5S2N, EEFBP6T2, EEFPB6S1, EEFPB6S2W, EEFPB6S2N, EEFPB8T2, EEFBP10T2, EEFPB12T2, EEFPS1S2

3.35 IFS — Integrated Facility System switchboard

FAM-EAT-022 · switchboard · aka Integrated Facility Switchboard, IFS switchboard · markings: Eaton

Free-standing front-access UL 891 switchboard that integrates standard panelboards, dry-type transformers and other equipment in 'cells'; used with Type 1 Pow-R-Line C switchboard sections.

Attribute	Value	Cl.	Sources
Status	current (2018 consulting guide)	A	S18 p. 21.6-1; oem_spec
Relationship	Used with Type 1 Pow-R-Line C switchboard sections; mains/feeders selected from Section 21.1 (PRLC)	A	same as above

Key documents: S18 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21)

3.36 MP2 — Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)

FAM-EAT-034 · switchboard · aka MP-2, MP-200, MP200 · markings: Cutler-Hammer

Cutler-Hammer group-mounted switchboard whose distribution sections accept the MP40 (breaker) and MP100 (fusible) chassis kits. Eaton documents call it both 'MP2' (Bid Manager help, RP01400003E snippets) and 'MP-200' (Vol 12 publication list, PL01400003E). Whether MP2 and MP-200 are the same product or two generations is not confirmed.

Attribute	Value	Cl.	Sources
Status	Out of production; renewal parts RP01400003E 'Renewal Parts Data for MP40 and MP-200'	A	S440 V12-T4-22; oem_spec
Designation	'MP2 group-mounted switchboards' (Eaton Bid Manager); 'MP-200' (Vol 12 Further Information); dealers list 'MP200' alongside MP40/MP50/MP100 (Equivalence of MP2 and MP-200 is inference)	B	S441, S440, S444 oem_spec

Key documents: S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp; S441 Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page; S442 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,; S443 PL01400003E Vintage Cutler-Hammer Panelboards and Switchboards Price List PL01400003E; S444 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it
Also fits this family (entry printed elsewhere): TAD3, MP40KF100-3, MP40KC225-3, MP40ED225-3, MP40KJ225-3, MP40KK400-3, MP40KL400-3, MP40KL600-3, MP40KM800-3, MP40KN1200-3, MP40CHH, MPED1K, KMP40KD3400, MP40KF100-2, MP40KF225-2, MP40KF225-3, MP40KC225-2, MP40KCHH225-2, MP40KCHH225-3, MP40KLL400-3, MP40FC-_X, MP40KF100-3H, M50ATW3211R, M50ATW3611R, M50ATW3222R, M50ATW3622R, M50ATW3233R, M50ATW3633R, M50ASB324R, M50ASB364R, M50ASW325R, M50ASW365R, M50ASW326R, M50ASW366R, M50ASW367T, M50ASW367B, M50ASW368T, M50ASW368B, MP100FC-_X

3.37 PRLC — Pow-R-Line C switchboard

FAM-EAT-017 · switchboard · aka POW-R-LINE C, PRL-C, Pow-R-Line C, Pow-R-Line C switchboard, Type 1 Pow-R-Line C · markings: Cutler-Hammer, Eaton, Westinghouse

Eaton (originally Westinghouse) Class II service-distribution switchboard, UL 891 / NEMA PB-2, front- or rear-access, with individually mounted mains and group-mounted feeder chassis. Evolved from the Westinghouse WF/WRP St. Louis switchboard when the design moved to Sumter SC and Visalia CA in 1988 with the introduction of Series C breakers. Distribution chassis are laid out in X units (1X = 1-3/8 in) on 38X or 50X vertical panel space in 36 in or 45 in wide structures; device X requirements (EHD 1-3X, FD 2-3X, JD 3X, KD 4X, LD/MDL/ND 6X) parallel the PRL4 panelboard chassis. Vol 12 states breaker provisions 'are available for all ratings of the Pow-R-Line C designs including all parts required to complete the cell', but no PRLC-specific provision kit catalog numbers were found in public documents (factory/Sumter quoted).

Attribute	Value	Cl.	Sources
Status	current (listed in April 2018 consulting guide)	A	S18 p. 21.0-8; oem_spec
Era of manufacture	Introduced late 1980s (1988) by Westinghouse as successor to WF/WRP; built in Sumter SC and Visalia CA; current Eaton product	A	S13 p. V12-T15-5 (Chronology); oem_spec
Voltage rating	240-480-600 Vac, 250 Vdc (2018 guide); 208-600 V (Vol 12 rating table)	A	S18, S13 p. 21.0-9 Table 21.0-2; p. V12-T15-5; oem_spec
Main ampacity	Mains 400-6000 A; switchboard bus 600-6000 A (Vol 12)	A	same as above
Branch breakers accepted	Group-mounted feeders: bolt-on molded case breakers 15-1200 A (Table 21.0-2 lists bolt-on fixed MCCB 15-2500 A), drawout MCCB 70-1200 A, fusible switches 30-1200 A. Uses Series C MCCBs (EHD, FD/HFD/FDC, ED, JD, DK/KD/HKD/KDC, LD/HLD/LDC, MDL/HMDL, NG/ND, LG, etc.)	A	S18 pp. 21.0-8, 21.0-9, 21.1-12 Fig 21.1-9; oem_spec
X unit	1X = 1-3/8 in (34.9 mm) in PRLC distribution layout	A	S18 p. 21.1-12 Fig 21.1-9; oem_spec
Distribution chassis	Distribution sections use 38X or 50X vertical panel space for devices (90 in high structures), widths 36 or 45 in	A	S18 p. 21.1-11 Fig 21.1-7; oem_spec
Device x space	Fig 21.1-9 (36 in structure): EHD 100 A 1P 1X / 2P 2X / 3P 3X; FDB/FD/HFD/FDC 150 A 1-3P 1-3X; EDB/EDS/ED/EDH/EDC & FD/HFD/FDC 225 A 2P 2X 3P 3X; JD/HJD/JDC 250 A 3X; DK/KD/HKD/KDC/CKD/CHKD 400 A 4X; ELKD earth leakage 4X; LGE/LGH/LGC/LGU 600 A 4X; LD/HLD/LDC/CLD 600 A 6X; FB-P 3X; NHH/LA-P 6X; MDL/HMDL/CMDL 800 A 6X; NG/NGH/NGC 1200 A 6X. 45 in structure: twin DK/KD/HKD/KDC 4X, NB-P 6X, NG 6X. Breaker-to-fusible transition 1X; SPD 7X or 10X; customer metering 11X	A	S18 p. 21.1-12 Fig 21.1-9; oem_spec
Main lug space	Main lugs only: 400/600 A 10X (2-#2-500) or 16X on 50X chassis (2-#250-750); 800 A 10X/16X; 1200-2000 A 12X/16X (38X chassis values 10-12X)	A	S18 p. 21.1-11 Table 21.1-11; oem_spec
Renewal parts	Eaton offers match-and-lineup PRLC structures, new breakers, breaker provisions/connectors 'available for all ratings of the Pow-R-Line C designs including all parts required to complete the cell', and switchboard structure parts	A	S13 p. V12-T15-5; oem_spec

Attribute	Value	Cl.	Sources
Bus torque	Pow-R-Line CS (Canadian derivative) manual gives busbar torque #10 30 lb-in, 1/4 in 65, 5/16 in 130, 3/8 in 240, 1/2 in 600 lb-in; 70 lb-ft when two Belleville washers per bolt. Not verified for PRLC (IM01500001E not obtained)	C	S22 p. 17 Appendix A Table 2; oem_spec
Branch kit relationship to prl4	A surplus listing titles the PRL4 connector kit KPRL4KDS as 'Pow-R-Line C'; the PRLC distribution X-space table matches PRL4 kit space requirements. Not OEM-confirmed that PRL4 KPRL4 kits are listed for PRLC switchboard chassis	D	S24, S18, S16 inference
Bus joint torque	Torque values for copper or aluminum bus bar connections: #10 = 30 lb-in (2.5 lb-ft); 1/4 in = 65 lb-in (5.4 lb-ft); 5/16 in = 130 lb-in (10.8 lb-ft); 3/8 in = 240 lb-in (20.0 lb-ft); 1/2 in = 600 lb-in (50.0 lb-ft). For other torque values refer to the instruction leaflet for the specific component. (IM01500001E covers Eaton Pow-R-Line switchboards generally (incl. Pow-R-Line C / i); not stated per sub-type.)	A	S23 p. 20, Appendix A Table 2; oem_spec
Installation doc	Pow-R-Line switchboards instruction manual IM01500001E (May 2021): splice plates installed with carriage bolts and hex nuts with captive Belleville washers, torqued per Appendix A Table 2 and switchboard labels; busway flange tie-bar hardware 0.375 in hex head bolt, flat washer and keps nut tightened to 20 lb-ft.	A	S23 pp. 9, 19, 20; oem_spec

Breaker families associated: ED, EHD, FD, JD, KD, LD, MDL, ND, RD
Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S16 RP01400001E (2017) Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, ; S18 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21); S22 IB015002EN Eaton Pow-R-Line CS switchboards instruction manual; S23 IM01500001E Pow-R-Line switchboards instruction manual; S24 eBay listing: EATON KPRL4KDS POW-R-LINE C einzelne Montage Panelboard Stecker Kit 400A 3P; S26 Surplus Record listing: Westinghouse Pow-R-Line C 4000 A 240 V 3PH3W 2-section switchboard
Also fits this family (entry printed elsewhere): SPD120480Y2C

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01264	**1A84774H01**	Eaton PRLC switchboard cover screws (1/4-20 x 1.50)	—	unknown

EDH-EAT-01264 **1A84774H01** Eaton fastener **STATUS UNKNOWN**

Eaton PRLC switchboard cover screws (1/4-20 x 1.50)

OEM part number	1A84774H01	A	S4 p. 12, Table 25 Pow-R-Kit Parts Order Form; oem_spec
Description	PRLC switchboard cover screws (1/4-20 x 1.50) (Pow-R-Kit renewal part list, RP01414001E).	A	same as above
Cross-links	Families: PRLC		
Not yet documented	Dimensions, Material, Status		

3.38 PRLCS — Pow-R-Line CS switchboard

FAM-EAT-021 · switchboard · aka Pow-R-Line CS, PRL CS · markings: Eaton
Eaton Canada switchboard line documented by instruction manual IB015002EN (Nov 2021). Manual gives bus-joint torque table (Appendix A). No branch kit catalog numbers found.

Attribute	Value	Cl.	Sources
Status	current (Canadian market; manual IB015002EN effective Nov 2021)	B	S22 cover; oem_spec
Bus torque	Busbar connections: #10 30 lb-in; 1/4 in 65 lb-in; 5/16 in 130 lb-in; 3/8 in 240 lb-in; 1/2 in 600 lb-in; with two Belleville washers per bolt (convex side up) torque to 70 lb-ft	A	S22 p. 17 Appendix A Table 2; oem_spec

Key documents: S22 IB015002EN Eaton Pow-R-Line CS switchboards instruction manual

3.39 PRLXD — Pow-R-Line XD switchboard

FAM-EAT-029 · switchboard · aka Pow-R-Line XD, PRL XD

Eaton Pow-R-Line XD low-voltage distribution switchboard; installation per instruction manual MN015002EN (July 2019).

Attribute	Value	Cl.	Sources
Bus joint torque	Torque values for copper or aluminum bus bar connections: #10 30 lb-in (2.5 lb-ft); 1/4 in 65 (5.4); 5/16 in 130 (10.8); 3/8 in 240 (20.0); 1/2 in 600 (50.0). Other torques: refer to the component instruction leaflet.	A	S245 Appendix A Table 1; oem_spec
Installation doc	MN015002EN; system ground fault instructions referenced as IB015002EN	A	S245 maintenance section; oem_spec

Key documents: S245 MN015002EN Pow-R-Line XD switchboards Instruction Manual MN015002EN (Effective July 2019)

3.40 PRLi — Pow-R-Line i switchboard

FAM-EAT-020 · switchboard · aka PRL i, Pow-R-Line I, Pow-R-Line i · markings: Cutler-Hammer, Eaton

Rear-access, front- and rear-aligned UL 891 switchboard with individually compartmentalized feeder devices (not group-mounted). Included here for lineage; branch hardware is device-specific compartments rather than group-mounted connector kits.

Attribute	Value	Cl.	Sources
Status	current (2018 consulting guide)	A	S18 p. 21.0-11; oem_spec
Era of manufacture	Evolved in 1991 from Asheville 'Pow-R-I' (itself from WRI); built in Sumter SC	A	S13 p. V12-T15-2; oem_spec
Main ampacity	4000 A main bus maximum	A	S18 p. 21.0-11; oem_spec
Branch breakers accepted	Individually compartmentalized feeders: MCCB 15-1200 A compartmentalized, fusible switches 100-1200 A, Magnum SB/DS, NRX	A	same as above
Bus joint torque	Pow-R-Line switchboards bus bar connection torque table: #10 30 lb-in; 1/4 in 65 lb-in; 5/16 in 130 lb-in; 3/8 in 240 lb-in; 1/2 in 600 lb-in (50 lb-ft). (Manual is for Pow-R-Line switchboards generally.)	A	S23 p. 20, Appendix A Table 2; oem_spec

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S18 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21); S23 IM01500001E Pow-R-Line switchboards instruction manual

3.41 WF/WRP — Westinghouse WF/WRP switchboard

FAM-EAT-018 · switchboard · aka WF, WRP, Type WF, Type WRP, WF/WRP switchboard · markings: Westinghouse

Westinghouse St. Louis Class II switchboard. Type WF = front access (rear flush), Type WRP = rear access (front and rear flush). Feeders were panel-mounted molded-case breakers or FDP fusible switches — the same device family used in CDP/FDP panelboards. Eaton's Sumter aftermarket center offers 'retrofit kits for WF and WRP distribution sections' and 'connector kits for WF and WRP distribution sections' (RP01400002E p.20), and Vol 12 says provisions/connectors are available for most ratings of WF/WRP; no catalog numbers published.

Attribute	Value	Cl.	Sources
Status	discontinued (superseded by Pow-R-Line C)	A	S13 p. V12-T15-5; oem_spec
Era of manufacture	Introduced 1955 by Westinghouse, St. Louis MO; design transferred 1988 to Sumter SC and Visalia CA as Pow-R-Line C	A	same as above
Successor	Pow-R-Line C switchboard (new PRLC match/lineup structures can connect to existing WF/WRP)	A	same as above
Voltage rating	120-600 V	A	S13 p. V12-T15-5 ratings table; oem_spec
Main ampacity	Switchboard bus 600-4000 A; protective devices 15-4000 A; 10-200 kA	A	S13 p. V12-T15-5; oem_spec
Branch breakers accepted	Group (panel)-mounted molded-case breakers or FDP fusible switches as feeders; mains DS, SPB, bolted pressure switch (CBC) or MCCB	A	S13 pp. V12-T15-2, V12-T15-5; oem_spec
Aftermarket / reproduction	Sumter Plant Aftermarket Center offers retrofit kits and connector kits for WF and WRP distribution sections	A	S14 p. 20; oem_spec

Breaker families associated: FB, RD
Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD
Also fits this family (entry printed elsewhere): KFDP4XT, KFDP5XT, KFDPB6X-2, KFDPW9X-4, KFDPW11X-6, KFDPW11X-8, KFDPW15X-12

3.42 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00462	**3T100FB**	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.); HFDDC 100 A **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00466	**3T150FB**	Series C F-frame line/load terminals, 200 A, Cu only (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.); also FP definite-purpose 200 A (s7) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00461	**3T20FB**	Series C F-frame line/load terminals, 20 (EHD) A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00468	**3T225FD**	Series C F-frame line/load terminals, 225 A, Cu only (pkg of 3)	F-frame **C**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00465	**3TA100FD**	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00622	**3TA150F3K**	Series C F-frame multiwire connector, 3 wires/terminal	F-frame (225 A max) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00623	**3TA150F6K**	Series C F-frame multiwire connector, 6 wires/terminal	F-frame (225 A max) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00469	**3TA150FB**	Series C F-frame line/load terminals, 150 A, Cu/Al, Q18	—	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00463	**3TA225FD**	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.); also listed for JG-frame DC breakers **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00467	**3TA225FDK**	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00464	**3TA50FB**	Series C F-frame line/load terminals, 50 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.) **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00462 **3T100FB** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)

OEM part number	3T100FB	**A**	S184, S251 p.12-91, Table 12-163; oem_spec
Alternate / superseded numbers	UPC 786679027011	**A**	S251 alias; skuPage.3T100FB (General/Product specifications); oem_spec
Description	Standard pressure-type line/load terminal, Cu/Al wire; package of 3 terminals	**A**	S184 p.12-91, Table 12-163; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 100 A, #14-1/0 AWG Cu/Al, Q18, Frame J-K, Series C, Pressure type line and load	**A**	S251 skuPage.3T100FB (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-91, Table 12-163; oem_spec
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	**A**	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.); HFDDC 100 A	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.3T100FB (General/Product specifications); oem_spec
Current rating	100 A max breaker	**A**	S184 p.12-91, Table 12-163; oem_spec

	100 A	A	S251 skuPage.3T100FB (General/Product specifications); oem_spec
Kit contents	3 terminals per package	A	S184 p.12-91, Table 12-163; oem_spec
Wire range	14-1/0 AWG (2.5-50 mm2)	A	same as above
	#14-1/0 AWG Cu/Al	A	S251 skuPage.3T100FB (General/Product specifications); oem_spec
Material	terminal body steel	A	S184 p.12-91, Table 12-163; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3T100FB (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3T100FB (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1.9 in, height 0.6 in, width 1.5 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00466 **3T150FB** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C F-frame line/load terminals, 200 A, Cu only (pkg of 3)

OEM part number	3T150FB	A	S184, S251 p.12-91, Table 12-163; oem_spec
Alternate / superseded numbers	UPC 786679840504	A	S251 alias; skuPage.3T150FB (General/Product specifications); oem_spec
Description	Optional pressure-type line/load terminal, Cu only wire; package of 3 terminals	A	S184 p.12-91, Table 12-163; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 200 A, #4-4/0 AWG Cu, Q18, Frame J-K, Series C, Pressure type	A	S251 skuPage.3T150FB (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-91, Table 12-163; oem_spec
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.); also FP definite-purpose 200 A (s7)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3T150FB (General/Product specifications); oem_spec
Current rating	200 A max breaker	A	S184 p.12-91, Table 12-163; oem_spec
	200 A	A	S251 skuPage.3T150FB (General/Product specifications); oem_spec
Kit contents	3 terminals per package	A	S184 p.12-91, Table 12-163; oem_spec
Wire range	4-4/0 AWG (25-95 mm2)	A	same as above
	#4-4/0 AWG Cu	A	S251 skuPage.3T150FB (General/Product specifications); oem_spec
Material	terminal body stainless steel	A	S184 p.12-91, Table 12-163; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3T150FB (General/Product specifications); oem_spec

Listing / approvals	UL Listed	A	S251 skuPage.3T150FB (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2 in, height 0.6 in, width 2 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00461 **3T20FB** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C F-frame line/load terminals, 20 (EHD) A, Cu/Al (pkg of 3)

OEM part number	3T20FB	A	S184, S251 p.12-91, Table 12-163; oem_spec
Alternate / superseded numbers	UPC 786679970560	A	S251 alias; skuPage.3T20FB (General/Product specifications); oem_spec
Description	Standard pressure-type line/load terminal, Cu/Al wire; package of 3 terminals; Not for use with ED, EDH, EDC breakers	A	S184 p.12-91, Table 12-163; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 20 A, #14-10 AWG Cu/Al, Q18, Series C, Pressure type line and load	A	S251 skuPage.3T20FB (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-91, Table 12-163; oem_spec
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.)	A	same as above
Current rating	20 (EHD) A max breaker	A	same as above
	20 A	A	S251 skuPage.3T20FB (General/Product specifications); oem_spec
Kit contents	3 terminals per package	A	S184 p.12-91, Table 12-163; oem_spec
Wire range	14-10 AWG (2.5-4 mm2)	A	same as above
	#14-10 AWG Cu/Al	A	S251 skuPage.3T20FB (General/Product specifications); oem_spec
Material	terminal body steel	A	S184 p.12-91, Table 12-163; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3T20FB (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.3T20FB (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 0.7 in, width 0.8 in, weight 0.04 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00468 **3T225FD** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C F-frame line/load terminals, 225 A, Cu only (pkg of 3)

OEM part number	3T225FD	A	S192, S251 oem_spec
Alternate / superseded numbers	UPC 786679118924	A	S251 alias; skuPage.3T225FD (General/Product specifications); oem_spec
Description	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 225 A, #4-4/0 AWG Cu, Q18, Frame J-K, Pressure type	A	same as above
	Optional copper-body pressure terminal, Cu wire, 4-4/0 AWG (25-95 mm2), package of 3 (reseller reproduction of newer Eaton table; not in 2008 table)	C	S192 distributor

Application	accessory	C	same as above
Breaker compatibility	F-frame	C	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3T225FD (General/Product specifications); oem_spec
Current rating	225 A	A	S192, S251 skuPage.3T225FD (General/Product specifications); oem_spec
Kit contents	3 terminals per package	C	S192 distributor
Wire range	#4-4/0 AWG Cu	A	S251 skuPage.3T225FD (General/Product specifications); oem_spec
	4-4/0 AWG (25-95 mm2) Cu	C	S192 distributor
Material	copper body	C	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3T225FD (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3T225FD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2 in, height 0.5 in, width 2 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00465 3TA100FD Eaton / Cutler-Hammer lug-kit ACTIVE EATON PRODUCT P

Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)

OEM part number	3TA100FD	A	S184, S251 p.12-91, Table 12-163; oem_spec
Alternate / superseded numbers	UPC 786679420683	A	S251 alias; skuPage.3TA100FD (General/Product specifications); oem_spec
Description	Optional pressure-type line/load terminal, Cu/Al wire; package of 3 terminals	A	S184 p.12-91, Table 12-163; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 100 A, #14-1/0 AWG Cu/Al, Q18, Frame J-K, Series C, Pressure type	A	S251 skuPage.3TA100FD (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-91, Table 12-163; oem_spec
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA100FD (General/Product specifications); oem_spec
Current rating	100 A max breaker	A	S184 p.12-91, Table 12-163; oem_spec
	100 A	A	S251 skuPage.3TA100FD (General/Product specifications); oem_spec
Kit contents	3 terminals per package	A	S184 p.12-91, Table 12-163; oem_spec
Wire range	14-1/0 AWG (2.5-50 mm2)	A	same as above
	#14-1/0 AWG Cu/Al	A	S251 skuPage.3TA100FD (General/Product specifications); oem_spec

Material	terminal body aluminum	A	S184 p.12-91, Table 12-163; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA100FD (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3TA100FD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.2 in, height 0.5 in, width 1 in, weight 0.06 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00622 **3TA150F3K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C F-frame multiwire connector, 3 wires/terminal

OEM part number	3TA150F3K	A	S184, S251 p.12-245, Table 12-456; oem_spec
Alternate / superseded numbers	UPC 786679843802	A	S251 alias; skuPage.3TA150F3K (General/Product specifications); oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	S184 p.12-245, Table 12-456; oem_spec
	Eaton molded case circuit breaker accessory multiwire connectors, Multiwire connectors, 225 A, #14-2 AWG Cu, Q18, Frame J-K, Series C, Three-wire	A	S251 skuPage.3TA150F3K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-245, Table 12-456; oem_spec
Installation location	load (OFF) end	A	same as above
Breaker compatibility	F-frame (225 A max)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA150F3K (General/Product specifications); oem_spec
Current rating	225 A	A	S184, S251 p.12-245, Table 12-456; oem_spec
Kit contents	package of 3	A	S184 p.12-245, Table 12-456; oem_spec
Wire range	(3) 14-2 AWG Cu per terminal	A	same as above
	#14-2 AWG Cu	A	S251 skuPage.3TA150F3K (General/Product specifications); oem_spec
Material	tin-plated aluminum connectors	A	S184 p.12-245, Table 12-456; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA150F3K (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.3TA150F3K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.5 in, height 0.7 in, width 2.5 in, weight 0.35 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00623 **3TA150F6K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C F-frame multiwire connector, 6 wires/terminal

OEM part number	3TA150F6K	**A**	S184, S251 p.12-245, Table 12-456; oem_spec
Alternate / superseded numbers	UPC 786679843826	**A**	S251 alias; skuPage.3TA150F6K (General/Product specifications); oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	**A**	S184 p.12-245, Table 12-456; oem_spec
	Eaton molded case circuit breaker accessory multiwire connectors, Multiwire connectors, 225 A, #14-6 AWG Cu, Q18, Frame J-K, Six-wire	**A**	S251 skuPage.3TA150F6K (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-245, Table 12-456; oem_spec
Installation location	load (OFF) end	**A**	same as above
Breaker compatibility	F-frame (225 A max)	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.3TA150F6K (General/Product specifications); oem_spec
Current rating	225 A	**A**	S184, S251 p.12-245, Table 12-456; oem_spec
Kit contents	package of 3	**A**	S184 p.12-245, Table 12-456; oem_spec
Wire range	(6) 14-6 AWG Cu per terminal	**A**	same as above
	#14-6 AWG Cu	**A**	S251 skuPage.3TA150F6K (General/Product specifications); oem_spec
Material	tin-plated aluminum connectors	**A**	S184 p.12-245, Table 12-456; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.3TA150F6K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.3TA150F6K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8 in, height 1 in, width 10 in, weight 0.39 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00469	3TA150FB	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C F-frame line/load terminals, 150 A, Cu/Al, Q18

OEM part number	3TA150FB	A	S189, S251 p.1; oem_spec
Alternate / superseded numbers	UPC 786679970584	A	S251 alias; skuPage.3TA150FB (General/Product specifications); oem_spec
Description	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 150 A, #4-4/0 AWG Cu/Al, Q18, Frame J-K, Series C, Pressure type line and load	A	same as above
	Line and load terminals, 150 A, #4-4/0 AWG Cu/Al, pressure type (Eaton web spec; frame field 'Frame J-K' doubtful)	C	S189 p.1; oem_spec
Application	accessory	C	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA150FB (General/Product specifications); oem_spec
Current rating	150 A	A	S189, S251 skuPage.3TA150FB (General/Product specifications); oem_spec
Kit contents	Quantity 18 (per web spec)	C	S189 p.1; oem_spec
Wire range	#4-4/0 AWG Cu/Al	A	S189, S251 skuPage.3TA150FB (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA150FB (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.3TA150FB (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.4 in, height 0.9 in, width 1.3 in, weight 0.07 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	breaker compatibility, Dimensions, OEM instruction document, not found in 2008/2015 catalog tables, Torque values		
Open question	*3TA150FB is absent from CA08101001E 2008 F-frame Table 12-163; is it a newer or regional (Canada) part, and which frame does it fit?*		

EDH-EAT-00463	3TA225FD	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)

OEM part number	3TA225FD	A	S184, S251 p.12-91, Table 12-163; oem_spec
Alternate / superseded numbers	UPC 786679222409	A	S251 alias; skuPage.3TA225FD (General/Product specifications); oem_spec
Description	Standard pressure-type line/load terminal, Cu/Al wire; package of 3 terminals; Standard on 225 A F-frame; assemble collar enclosing conductor, clip snaps around collar	A	S184 p.12-91, Table 12-163; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 225 A, #4-4/0 AWG Cu/Al, Q18, Series C, Pressure type line and load	A	S251 skuPage.3TA225FD (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-91, Table 12-163; oem_spec
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.); also listed for JG-frame DC breakers (JGEDC/JGSDC/JGHDC 225 A) and FG enclosed breakers	A	same as above
Current rating	225 A max breaker	A	same as above
	225 A	A	S251 skuPage.3TA225FD (General/Product specifications); oem_spec

Kit contents	3 terminals per package	A	S184 p.12-91, Table 12-163; oem_spec
Wire range	4-4/0 AWG (25-95 mm2)	A	same as above
	#4-4/0 AWG Cu/Al	A	S251 skuPage.3TA225FD (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-91, Table 12-163; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA225FD (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3TA225FD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.2 in, height 0.5 in, width 1.2 in, weight 0.09 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE), Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00467 **3TA225FDK** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)

OEM part number	3TA225FDK	A	S184, S251 p.12-91, Table 12-163; oem_spec
Alternate / superseded numbers	UPC 786679844250	A	S251 alias; skuPage.3TA225FDK (General/Product specifications); oem_spec
Description	Optional pressure-type line/load terminal, Cu/Al wire; package of 3 terminals; Includes terminal shield kit; adds approx. 3 in (76.2 mm) to breaker height; 3-pole only	A	S184 p.12-91, Table 12-163; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 225 A, #6 AWG-300 kcmil Cu/Al, Q18, Frame J-K, Series C, Pressure type	A	S251 skuPage.3TA225FDK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-91, Table 12-163; oem_spec
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA225FDK (General/Product specifications); oem_spec
Current rating	225 A max breaker	A	S184 p.12-91, Table 12-163; oem_spec
	225 A	A	S251 skuPage.3TA225FDK (General/Product specifications); oem_spec
Kit contents	3 terminals per package; includes terminal shield kit	A	S184 p.12-91, Table 12-163; oem_spec
Wire range	6 AWG-300 kcmil (16-150 mm2)	A	same as above
	#6 AWG-300 kcmil Cu/Al	A	S251 skuPage.3TA225FDK (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-91, Table 12-163; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA225FDK (General/Product specifications); oem_spec

Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.3TA225FDK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.4 in, height 4.8 in, width 4.1 in, weight 0.7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00464 **3TA50FB** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C F-frame line/load terminals, 50 A, Cu/Al (pkg of 3)

OEM part number	3TA50FB	**A**	S184, S251 p.12-91, Table 12-163; oem_spec
Alternate / superseded numbers	UPC 786679970591	**A**	S251 alias; skuPage.3TA50FB (General/Product specifications); oem_spec
Description	Optional pressure-type line/load terminal, Cu/Al wire; package of 3 terminals; Not for use with ED, EDH, EDC breakers	**A**	S184 p.12-91, Table 12-163; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 50 A, #14-4 AWG Cu/Al, Q18, Frame J-K, Series C, Pressure type	**A**	S251 skuPage.3TA50FB (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-91, Table 12-163; oem_spec
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	**A**	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.)	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.3TA50FB (General/Product specifications); oem_spec
Current rating	50 A max breaker	**A**	S184 p.12-91, Table 12-163; oem_spec
	50 A	**A**	S251 skuPage.3TA50FB (General/Product specifications); oem_spec
Kit contents	3 terminals per package	**A**	S184 p.12-91, Table 12-163; oem_spec
Wire range	14-4 AWG (2.5-25 mm2)	**A**	same as above
	#14-4 AWG Cu/Al	**A**	S251 skuPage.3TA50FB (General/Product specifications); oem_spec
Material	terminal body aluminum	**A**	S184 p.12-91, Table 12-163; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.3TA50FB (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.3TA50FB (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.2 in, height 0.5 in, width 1.2 in, weight 0.05 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00683	**1253C72G01**	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 50 A	F-frame in panelboards (bus spacing per description) **A**	unknown
EDH-EAT-00684	**1253C72G03**	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 50 A	F-frame in panelboards (bus spacing per description) **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00687	**1253C73G01**	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 150 A	F-frame in panelboards (bus spacing per description) **A**	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-00685	**1253C73G03**	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 100 A	F-frame in panelboards (bus spacing per description) **A**	unknown
EDH-EAT-00688	**1253C73G05**	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 150 A	F-frame in panelboards (bus spacing per description) **A**	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-00686	**1253C73G06**	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 100 A	F-frame in panelboards (bus spacing per description) **A**	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-00679	**673B142G02**	Series C F-frame panelboard connecting strap, center pole, 2.75 in bus spacing, 100 A	F-frame in panelboards (bus spacing per description) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00682	**673B142G03**	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 150 A	F-frame in panelboards (bus spacing per description) **A**	unknown
EDH-EAT-00681	**673B142G04**	Series C F-frame panelboard connecting strap, center pole, 2.75 in, 150 A	F-frame in panelboards (bus spacing per description) **A**	unknown
EDH-EAT-00680	**673B142G10**	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 100 A	F-frame in panelboards (bus spacing per description) **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00683 **1253C72G01** Eaton / Cutler-Hammer connector-strap **STATUS UNKNOWN**

Series C F-frame panelboard connecting strap, center pole, 3.50 in, 50 A

OEM part number	1253C72G01	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 50 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	between breaker line terminal and panelboard bus	**A**	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00684 **1253C72G03** Eaton / Cutler-Hammer connector-strap **STATUS UNKNOWN**

Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 50 A

OEM part number	1253C72G03	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 50 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	between breaker line terminal and panelboard bus	**A**	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00687 **1253C73G01** Eaton / Cutler-Hammer connector-strap **DISCONTINUED (EATON PR**

Series C F-frame panelboard connecting strap, center pole, 3.50 in, 150 A

OEM part number	1253C73G01	**A**	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679825389	**A**	S251 alias; skuPage.1253C73G01 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 150 A	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec

	Eaton molded case circuit breaker accessory tri-pack, Convertible power panelboards, G01, 150 A, Center connection, For Tri-Pac FB and FCL Breakers, Frame J-K	A	S251 skuPage.1253C73G01 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
	For Tri-Pac FB and FCL breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.1253C73G01 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	150 A	A	same as above
Kit contents	G01 (Eaton web 'Special features' attribute)	A	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	same as above
Listing / approvals	Contact Manufacturer	A	S251 skuPage.1253C73G01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.6 in, height 2.1 in, width 2.8 in, weight 0.7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00685 **1253C73G03** Eaton / Cutler-Hammer connector-strap **STATUS UNKNOWN**

Series C F-frame panelboard connecting strap, center pole, 3.50 in, 100 A

OEM part number	1253C73G03	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 100 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00688 **1253C73G05** Eaton / Cutler-Hammer connector-strap **DISCONTINUED (EATON PR**

Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 150 A

OEM part number	1253C73G05	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679518922	A	S251 alias; skuPage.1253C73G05 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 150 A	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G05, 150 A, 600 V, Outside, Frame J-K	A	S251 skuPage.1253C73G05 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.1253C73G05 (General/Product specifications); oem_spec
Voltage rating	600 V	A	same as above
Current rating	150 A	A	same as above

Kit contents	G05 (Eaton web 'Special features' attribute)	A	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.1253C73G05 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7.5 in, height 2 in, width 3.5 in, weight 0.8 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00686 — 1253C73G06 — Eaton / Cutler-Hammer — connector-strap — DISCONTINUED (EATON PR

Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 100 A

OEM part number	1253C73G06	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679825440	A	S251 alias; skuPage.1253C73G06 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 100 A	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G06, 100 A, 600 V, Outside, Frame J-K	A	S251 skuPage.1253C73G06 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.1253C73G06 (General/Product specifications); oem_spec
Voltage rating	600 V	A	same as above
Current rating	100 A	A	same as above
Kit contents	G06 (Eaton web 'Special features' attribute)	A	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.1253C73G06 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7.3 in, height 2.8 in, width 1.9 in, weight 0.6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00679 — 673B142G02 — Eaton / Cutler-Hammer — connector-strap — ACTIVE EATON PRODUCT P

Series C F-frame panelboard connecting strap, center pole, 2.75 in bus spacing, 100 A

OEM part number	673B142G02	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679841365	A	S251 alias; skuPage.673B142G02 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 2.75 in bus spacing, 100 A	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G02, 50 A, 600 V, Center connection, Frame J-K	A	S251 skuPage.673B142G02 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec

Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.673B142G02 (General/Product specifications); oem_spec
Voltage rating	600 V	A	same as above
Current rating	50 A	A	same as above
Kit contents	G02 (Eaton web 'Special features' attribute)	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.673B142G02 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4.9 in, height 2.5 in, width 3.1 in, weight 0.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*KM reproduction lists 673B142G02 as center strap for both 50 A and 100 A at 2.75 in spacing; 2008 OEM table lists only 100 A and 150 A rows at 2.75 in.*		

EDH-EAT-00682 **673B142G03** Eaton / Cutler-Hammer connector-strap **STATUS UNKNOWN**

Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 150 A

OEM part number	673B142G03	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 2.75 in, 150 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00681 **673B142G04** Eaton / Cutler-Hammer connector-strap **STATUS UNKNOWN**

Series C F-frame panelboard connecting strap, center pole, 2.75 in, 150 A

OEM part number	673B142G04	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 2.75 in, 150 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00680 **673B142G10** Eaton / Cutler-Hammer connector-strap **ACTIVE EATON PRODUCT P**

Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 100 A

OEM part number	673B142G10	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679841488	A	S251 alias; skuPage.673B142G10 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 2.75 in, 100 A	A	S184 p.12-261, Tables 12-511..12-521; oem_spec

	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G10, 100 A, 600 V, Outside, Frame J-K	A	S251 skuPage.673B142G10 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.673B142G10 (General/Product specifications); oem_spec
Voltage rating	600 V	A	same as above
Current rating	100 A	A	same as above
Kit contents	G10 (Eaton web 'Special features' attribute)	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.673B142G10 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7 in, height 1 in, width 5 in, weight 0.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00702	**624B600H01**	Series C F-frame panelboard strap mounting bracket	F-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00701	**624B600H02**	Series C F-frame panelboard strap mounting bracket	F-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00702	624B600H01	Eaton / Cutler-Hammer	mounting-bracket	ACTIVE EATON PRODUCT P

Series C F-frame panelboard strap mounting bracket

OEM part number	624B600H01	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679840528	A	S251 alias; skuPage.624B600H01 (General/Product specifications); oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations)	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory base mounting hardware, Panelboard connecting straps, Three-pole, Frame J-K	A	S251 skuPage.624B600H01 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	panelboard interior, supports breaker/strap	A	same as above
Breaker compatibility	F-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.624B600H01 (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.624B600H01 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.624B600H01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4 in, height 2 in, width 2 in, weight 4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00701	624B600H02	Eaton / Cutler-Hammer	mounting-bracket	ACTIVE EATON PRODUCT P

Series C F-frame panelboard strap mounting bracket

OEM part number	624B600H02	**A**	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679840542	**A**	S251 alias; skuPage.624B600H02 (General/Product specifications); oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations)	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory base mounting hardware, Eaton molded case circuit breaker accessory base mounting hardware, Panelboard connecting straps, Two-pole	**A**	S251 skuPage.624B600H02 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	panelboard interior, supports breaker/strap	**A**	same as above
Breaker compatibility	F-frame	**A**	same as above
Poles	2	**A**	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.624B600H02 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.624B600H02 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 1 in, width 1 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00633	**4210B95G01**	Series C F-frame special terminal shield 3-pole for use with electrical operator	F-frame **A**	unknown
EDH-EAT-00634	**4210B95G02**	Series C F-frame special terminal shield 4-pole for use with electrical operator	F-frame **A**	unknown
EDH-EAT-00629	**625B229G06**	Series C F-frame terminal shield 1-pole, line	F-frame **A**	unknown
EDH-EAT-00630	**625B229G07**	Series C F-frame terminal shield 2-pole, line	F-frame **A**	unknown
EDH-EAT-00631	**625B229G08**	Series C F-frame terminal shield 3-pole, line	F-frame **A**	unknown
EDH-EAT-00632	**625B229G09**	Series C F-frame terminal shield 4-pole, line	F-frame **A**	unknown
EDH-EAT-00647	**IPB1**	Series C interphase barrier (F)	F **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00645	**TEC1**	Series C F-frame terminal end cover, 0.25 opening	F-frame 3-pole **A**	unknown
EDH-EAT-00646	**TEC2**	Series C F-frame terminal end cover, 0.41 opening	F-frame 3-pole **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00633	4210B95G01	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame special terminal shield 3-pole for use with electrical operator

OEM part number	4210B95G01	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame special terminal shield 3-pole for use with electrical operator	A	same as above
Application	accessory	A	same as above
Installation location	terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	3	A	same as above
Kit contents	individually packaged	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00634	4210B95G02	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame special terminal shield 4-pole for use with electrical operator

OEM part number	4210B95G02	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame special terminal shield 4-pole for use with electrical operator	A	same as above
Application	accessory	A	same as above
Installation location	terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	4	A	same as above
Kit contents	individually packaged	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00629	625B229G06	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal shield 1-pole, line

OEM part number	625B229G06	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame terminal shield 1-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	1	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00630	625B229G07	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal shield 2-pole, line

OEM part number	625B229G07	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame terminal shield 2-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	2	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00631	625B229G08	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal shield 3-pole, line

OEM part number	625B229G08	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame terminal shield 3-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	3	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00632	625B229G09	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal shield 4-pole, line

OEM part number	625B229G09	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame terminal shield 4-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	4	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00647	IPB1	Eaton / Cutler-Hammer	barrier	ACTIVE EATON PRODUCT P

Series C interphase barrier (F)

OEM part number	IPB1	A	S184, S251 p.12-249, Table 12-469; oem_spec
Alternate / superseded numbers	UPC 786679304822	A	S251 alias; skuPage.IPB1 (General/Product specifications); oem_spec
Description	Interphase barriers: high-dielectric insulating plates installed in molded slots between terminals for added clearance; field installation only; two per package	A	S184 p.12-249, Table 12-469; oem_spec
	Eaton molded case circuit breaker accessory interphase barrier, Interphase barriers, Q13, Frame F, Series C	A	S251 skuPage.IPB1 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-249, Table 12-469; oem_spec
Breaker compatibility	F	A	same as above
Breaker frame	Frame F	A	S251 skuPage.IPB1 (General/Product specifications); oem_spec
Kit contents	2 per package	A	S184 p.12-249, Table 12-469; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.IPB1 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.IPB1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.2 in, height 0.2 in, width 2.2 in, weight 0.07 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00645	TEC1	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal end cover, 0.25 opening

OEM part number	TEC1	A	S184 p.12-249, Table 12-468; oem_spec
Description	Molded glass-polyester terminal end cover sliding over line end of 3-pole F-frame, forming terminal compartments isolating ionized gases (MCC applications); UL File E7819	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F-frame 3-pole	A	same as above
Kit contents	one per breaker	A	same as above
Material	glass-polyester	A	same as above
Dimensions	conductor opening diameter 0.25 in (6.35 mm)	A	S184 p.12-249; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00646	TEC2	Eaton / Cutler-Hammer	barrier	ACTIVE EATON PRODUCT P

Series C F-frame terminal end cover, 0.41 opening

OEM part number	TEC2	**A**	S184, S251 p.12-249, Table 12-468; oem_spec
Alternate / superseded numbers	UPC 786679803462	**A**	S251 alias; skuPage.TEC2 (General/Product specifications); oem_spec
Description	Molded glass-polyester terminal end cover sliding over line end of 3-pole F-frame, forming terminal compartments isolating ionized gases (MCC applications); UL File E7819	**A**	S184 p.12-249, Table 12-468; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal end cover, Frame J-K, Series C, 0.41 in	**A**	S251 skuPage.TEC2 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-249, Table 12-468; oem_spec
Breaker compatibility	F-frame 3-pole	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.TEC2 (General/Product specifications); oem_spec
Kit contents	one per breaker	**A**	S184 p.12-249, Table 12-468; oem_spec
Material	glass-polyester	**A**	same as above
Dimensions	conductor opening diameter 0.41 in (10.41 mm)	**A**	S184 p.12-249; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.TEC2 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	**A**	S251 skuPage.TEC2 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4.3 in, height 1.1 in, width 2.3 in, weight 0.25 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	OEM instruction document, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00609	**KPR1A**	Series C F-frame keeper nut (10-32, line or load end)	F-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00610	**KPR1AM**	Series C F-frame keeper nut (M5, line or load end)	F-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00609	KPR1A	Eaton / Cutler-Hammer	fastener	ACTIVE EATON PRODUCT P

Series C F-frame keeper nut (10-32, line or load end)

OEM part number	KPR1A	A	S184, S251 p.12-243, Table 12-448; oem_spec
Alternate / superseded numbers	UPC 786679110201	A	S251 alias; skuPage.KPR1A (General/Product specifications); oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	S184 p.12-243, Table 12-448; oem_spec
	Eaton molded case circuit breaker accessory termination hardware, Imperial keeper nut, Frame J-K, Oct-32	A	S251 skuPage.KPR1A (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-448; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.KPR1A (General/Product specifications); oem_spec
Kit contents	package of 12	A	S184 p.12-243, Table 12-448; oem_spec
Fasteners	thread 10-32	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPR1A (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.KPR1A (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.25 in, height 0.25 in, width 0.5 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00610	KPR1AM	Eaton / Cutler-Hammer	fastener	ACTIVE EATON PRODUCT P

Series C F-frame keeper nut (M5, line or load end)

OEM part number	KPR1AM	A	S184, S251 p.12-243, Table 12-448; oem_spec
Alternate / superseded numbers	UPC 786679266113	A	S251 alias; skuPage.KPR1AM (General/Product specifications); oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	S184 p.12-243, Table 12-448; oem_spec
	Eaton molded case circuit breaker accessory termination hardware, Metric keeper nut, Frame J-K, Series C, M-5	A	S251 skuPage.KPR1AM (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-448; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.KPR1AM (General/Product specifications); oem_spec
Kit contents	package of 12	A	S184 p.12-243, Table 12-448; oem_spec
Fasteners	thread M5	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPR1AM (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPR1AM (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.5 in, height 0.5 in, width 0.25 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00654	**374D883G01**	Series C F-frame rear connecting stud, 225 A short stud (110-225 A breakers)	F-frame fixed-mounted A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00655	**374D883G02**	Series C F-frame rear connecting stud, 225 A long stud	F-frame fixed-mounted A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00652	**451D874G01**	Series C F-frame rear connecting stud, 100 A short stud (15-100 A breakers)	F-frame fixed-mounted A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00653	**451D874G02**	Series C F-frame rear connecting stud, 100 A long stud	F-frame fixed-mounted A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00617	**FCWTK**	Series C F-frame control wire terminal kit	F-frame A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00618	**FCWTK225**	Series C F-frame control wire terminal kit	F-frame A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00593	**KPEK1**	Series C F-frame end cap kit, 3-pole, 10-32	F-frame 3-pole (225 A) A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00591	**KPEK12**	Series C F-frame end cap kit, 2-pole, 10-32	F-frame 2-pole (225 A) A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00595	**KPEK14**	Series C F-frame end cap kit, 4-pole, 10-32	F-frame 4-pole (225 A) A	Active Eaton product page (no Discontinued banner), accessed

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00594	**KPEKM1**	Series C F-frame end cap kit, 3-pole, M5	F-frame 3-pole (225 A) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00592	**KPEKM12**	Series C F-frame end cap kit, 2-pole, M5	F-frame 2-pole (225 A) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00596	**KPEKM14**	Series C F-frame end cap kit, 4-pole, M5	F-frame 4-pole (225 A) **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00654 **374D883G01** Eaton / Cutler-Hammer breaker-accessory **ACTIVE EATON PRODUCT P**

Series C F-frame rear connecting stud, 225 A short stud (110-225 A breakers)

OEM part number	374D883G01	**A**	S184, S251 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Alternate / superseded numbers	UPC 786679305287	**A**	S251 alias; skuPage.374D883G01 (General/Product specifications); oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 225 A short stud (110-225 A breakers); tubes 374D883H06-H09	**A**	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	Eaton molded case circuit breaker accessory rear connected studs, Rear connected studs, G01, 225 A, Short, For 110 to 225 A Circuit breakers, Frame J-K, Series C	**A**	S251 skuPage.374D883G01 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Installation location	line/load terminal, through mounting panel (rear connection)	**A**	same as above
Breaker compatibility	F-frame fixed-mounted	**A**	same as above
	For 110 to 225 A Circuit breakers (Eaton web 'Used with' attribute)	**A**	S251 skuPage.374D883G01 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	**A**	same as above
Current rating	225 A	**A**	same as above
Kit contents	stud only; tube(s) 374D883H06/H07/H08/H09 ordered separately by panel thickness	**A**	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	G01 (Eaton web 'Special features' attribute)	**A**	S251 skuPage.374D883G01 (General/Product specifications); oem_spec
Fasteners	.44-14 thread	**A**	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.374D883G01 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.374D883G01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.5 in, height 1.5 in, width 1.5 in, weight 0.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00655 **374D883G02** Eaton / Cutler-Hammer breaker-accessory **ACTIVE EATON PRODUCT P**

Series C F-frame rear connecting stud, 225 A long stud

OEM part number	374D883G02	**A**	S184, S251 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Alternate / superseded numbers	UPC 786679836323	**A**	S251 alias; skuPage.374D883G02 (General/Product specifications); oem_spec

Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 225 A long stud; tubes 374D883H10-H13	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	Eaton molded case circuit breaker accessory rear connected studs, Rear connected studs, G02, 225 A, Long, For 110 to 225 A Circuit breakers, Frame J-K, Series C	A	S251 skuPage.374D883G02 (General/Product specifications); oem_spec
Application	accessory	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	F-frame fixed-mounted	A	same as above
	For 110 to 225 A Circuit breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.374D883G02 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	225 A	A	same as above
Kit contents	stud only; tube(s) 374D883H10/H11/H12/H13 ordered separately by panel thickness	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	G02 (Eaton web 'Special features' attribute)	A	S251 skuPage.374D883G02 (General/Product specifications); oem_spec
Fasteners	.44-14 thread	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.374D883G02 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.374D883G02 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.6 in, height 1.6 in, width 1.8 in, weight 0.7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00652	451D874G01	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C F-frame rear connecting stud, 100 A short stud (15-100 A breakers)

OEM part number	451D874G01	A	S184, S251 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Alternate / superseded numbers	UPC 786679770917	A	S251 alias; skuPage.451D874G01 (General/Product specifications); oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 100 A short stud (15-100 A breakers); tubes 32B9446H20-H23 by panel thickness	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	Eaton molded case circuit breaker accessory rear connected studs, Rear connected studs, G01, 100 A, Short, For 15 to 100 A Circuit breakers, Frame J-K, Series C	A	S251 skuPage.451D874G01 (General/Product specifications); oem_spec
Application	accessory	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	F-frame fixed-mounted	A	same as above
	For 15 to 100 A Circuit breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.451D874G01 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	100 A	A	same as above
Kit contents	stud only; tube(s) 32B9446H20/H21/H22/H23 ordered separately by panel thickness	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec

	G01 (Eaton web 'Special features' attribute)	A	S251 skuPage.451D874G01 (General/Product specifications); oem_spec
Fasteners	.31-18 thread	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.451D874G01 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.451D874G01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.7 in, height 1 in, width 2.2 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00653 — 451D874G02 — Eaton / Cutler-Hammer — breaker-accessory — ACTIVE EATON PRODUCT P

Series C F-frame rear connecting stud, 100 A long stud

OEM part number	451D874G02	A	S184, S251 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Alternate / superseded numbers	UPC 786679770924	A	S251 alias; skuPage.451D874G02 (General/Product specifications); oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 100 A long stud; tubes 32B9446H24-H27	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	Eaton molded case circuit breaker accessory rear connected studs, Rear connected studs, G02, 100 A, Long, For 15 to 100 A Circuit breakers, Frame J-K, Series C	A	S251 skuPage.451D874G02 (General/Product specifications); oem_spec
Application	accessory	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	F-frame fixed-mounted	A	same as above
	For 15 to 100 A Circuit breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.451D874G02 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	100 A	A	same as above
Kit contents	stud only; tube(s) 32B9446H24/H25/H26/H27 ordered separately by panel thickness	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	G02 (Eaton web 'Special features' attribute)	A	S251 skuPage.451D874G02 (General/Product specifications); oem_spec
Fasteners	.31-18 thread	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.451D874G02 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.451D874G02 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.5 in, height 1.5 in, width 1.5 in, weight 0.25 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00617 — FCWTK — Eaton / Cutler-Hammer — breaker-accessory — ACTIVE EATON PRODUCT P

Series C F-frame control wire terminal kit

OEM part number	FCWTK	**A**	S184, S251 p.12-244, Tables 12-452..12-454; oem_spec
Alternate / superseded numbers	UPC 786679072943	**A**	S251 alias; skuPage.FCWTK (General/Product specifications); oem_spec
Description	F-frame control wire terminal kit, 150 A (12 tangs; terminals ordered separately); for steel or stainless steel terminals only; taps control power using male quick-disconnect	**A**	S184 p.12-244, Tables 12-452..12-454; oem_spec
	Eaton molded case circuit breaker accessory motor operator, Control wire terminal kit, 150 A, Q7, Frame J-K	**A**	S251 skuPage.FCWTK (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-244, Tables 12-452..12-454; oem_spec
Breaker compatibility	F-frame	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.FCWTK (General/Product specifications); oem_spec
Current rating	150 A	**A**	same as above
Kit contents	package of 12 control wire tangs, priced individually	**A**	S184 p.12-244, Tables 12-452..12-454; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.FCWTK (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.FCWTK (General/Product specifications); oem_spec
Installation requirements	Not for use with T250KB terminals (Eaton web 'Catalog Notes')	**A**	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 1.19 in, height 0.031 in, width 0.5 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Requires	3T100FB (EDH-EAT-00462)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00618	FCWTK225	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C F-frame control wire terminal kit

OEM part number	FCWTK225	A	S184, S251 p.12-244, Tables 12-452..12-454; oem_spec
Alternate / superseded numbers	UPC 782114373231	A	S251 alias; skuPage.FCWTK225 (General/Product specifications); oem_spec
Description	F-frame control wire terminal kit, 225 A (12 tangs); taps control power using male quick-disconnect	A	S184 p.12-244, Tables 12-452..12-454; oem_spec
	Eaton molded case circuit breaker accessory motor operator, Control wire terminal kit, 225 A, Q7, Frame J-K	A	S251 skuPage.FCWTK225 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-244, Tables 12-452..12-454; oem_spec
Breaker compatibility	F-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.FCWTK225 (General/Product specifications); oem_spec
Current rating	225 A	A	same as above
Kit contents	package of 12 control wire tangs, priced individually	A	S184 p.12-244, Tables 12-452..12-454; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FCWTK225 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.FCWTK225 (General/Product specifications); oem_spec
Installation requirements	Not for use with T250KB terminals (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 6 in, height 0.25 in, width 4 in, weight 0.08 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00593	KPEK1	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C F-frame end cap kit, 3-pole, 10-32

OEM part number	KPEK1	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 782114291832	A	S251 alias; skuPage.KPEK1 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Accessories and terminals, Three-pole, Frame J-K, Series C	A	S251 skuPage.KPEK1 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 3-pole (225 A)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.KPEK1 (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-243, Table 12-447; oem_spec
Fasteners	thread 10-32	A	S184 p.12-243, Table 12-447; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEK1 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.KPEK1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.4 in, height 2.5 in, width 2.7 in, weight 0.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00591	KPEK12	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C F-frame end cap kit, 2-pole, 10-32

OEM part number	KPEK12	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 782114291818	A	S251 alias; skuPage.KPEK12 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Accessories and terminals, Imperial end cap kit, 225 A, Two-pole, Frame F, Series C	A	S251 skuPage.KPEK12 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 2-pole (225 A)	A	same as above
Breaker frame	Frame F	A	S251 skuPage.KPEK12 (General/Product specifications); oem_spec
Poles	2	A	S184, S251 p.12-243, Table 12-447; oem_spec

Current rating	225 A	A	S251 skuPage.KPEK12 (General/Product specifications); oem_spec
Fasteners	thread 10-32	A	S184 p.12-243, Table 12-447; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEK12 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPEK12 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 3 in, width 3 in, weight 0.15 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00595 KPEK14 Eaton / Cutler-Hammer breaker-accessory ACTIVE EATON PRODUCT P

Series C F-frame end cap kit, 4-pole, 10-32

OEM part number	KPEK14	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 782116484348	A	S251 alias; skuPage.KPEK14 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Accessories and terminals, 225 A, Four-pole, Molded case circuit breaker, Frame J-K, Series C	A	S251 skuPage.KPEK14 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 4-pole (225 A)	A	same as above
	Molded case circuit breaker (Eaton web 'Used with' attribute)	A	S251 skuPage.KPEK14 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Poles	4	A	S184, S251 p.12-243, Table 12-447; oem_spec
Current rating	225 A	A	S251 skuPage.KPEK14 (General/Product specifications); oem_spec
Fasteners	thread 10-32	A	S184 p.12-243, Table 12-447; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEK14 (General/Product specifications); oem_spec
Listing / approvals	UL Listed file E7819; Contact Manufacturer	A	S251 skuPage.KPEK14 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.25 in, height 2.63 in, width 2.5 in, weight 0.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00594 KPEKM1 Eaton / Cutler-Hammer breaker-accessory ACTIVE EATON PRODUCT P

Series C F-frame end cap kit, 3-pole, M5

OEM part number	KPEKM1	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 782114291849	A	S251 alias; skuPage.KPEKM1 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Accessories and terminals, 225 A, Frame J-K, Series C	A	S251 skuPage.KPEKM1 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 3-pole (225 A)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.KPEKM1 (General/Product specifications); oem_spec
Poles	3	A	S184 p.12-243, Table 12-447; oem_spec
Current rating	225 A	A	S251 skuPage.KPEKM1 (General/Product specifications); oem_spec
Fasteners	thread M5	A	S184 p.12-243, Table 12-447; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEKM1 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPEKM1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 21.59 cm, height 5.33 cm, width 6.85 cm, weight 0.13 kg (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00592 **KPEKM12** Eaton / Cutler-Hammer breaker-accessory **ACTIVE EATON PRODUCT P**

Series C F-frame end cap kit, 2-pole, M5

OEM part number	KPEKM12	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 782114291825	A	S251 alias; skuPage.KPEKM12 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, End cap kit, 225 A, Two-pole, Frame F, Series C, M-5 thread	A	S251 skuPage.KPEKM12 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 2-pole (225 A)	A	same as above
Breaker frame	Frame F	A	S251 skuPage.KPEKM12 (General/Product specifications); oem_spec
Poles	2	A	S184, S251 p.12-243, Table 12-447; oem_spec

Current rating	225 A	A	S251 skuPage.KPEKM12 (General/Product specifications); oem_spec
Fasteners	thread M5	A	S184 p.12-243, Table 12-447; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEKM12 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPEKM12 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.25 in, height 2.625 in, width 2.5 in, weight 0.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00596 **KPEKM14** Eaton / Cutler-Hammer breaker-accessory **ACTIVE EATON PRODUCT P**

Series C F-frame end cap kit, 4-pole, M5

OEM part number	KPEKM14	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 782114291863	A	S251 alias; skuPage.KPEKM14 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Accessories and terminals, Metric end cap kit, 225 A, Four-pole, Frame F, Series C	A	S251 skuPage.KPEKM14 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 4-pole (225 A)	A	same as above
Breaker frame	Frame F	A	S251 skuPage.KPEKM14 (General/Product specifications); oem_spec
Poles	4	A	S184, S251 p.12-243, Table 12-447; oem_spec
Current rating	225 A	A	S251 skuPage.KPEKM14 (General/Product specifications); oem_spec
Fasteners	thread M5	A	S184 p.12-243, Table 12-447; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEKM14 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.KPEKM14 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.25 in, height 2.625 in, width 2.5 in, weight 0.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker family Series C F-frame (EHD/FDB/FD/HFD/FDC)

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01330	**4218B80G01**	Eaton base mounting hardware, F-frame 2-pole	—	unknown
EDH-EAT-01328	**624B375G01**	Eaton base mounting hardware, F-frame 1-pole	—	unknown
EDH-EAT-01329	**624B375G02**	Eaton base mounting hardware, F-frame 1-pole	—	unknown
EDH-EAT-01331	**BMH1**	Eaton base mounting hardware, F-frame 3/4-pole	—	unknown

EDH-EAT-01330 — 4218B80G01 — Cutler-Hammer — fastener — STATUS UNKNOWN

Eaton base mounting hardware, F-frame 2-pole

OEM part number	4218B80G01	A	S184 p. 12-254, Tables 12-457/12-458 Base Mounting Hardware (surface mounting; supplied only on request); oem_spec
Description	Base (surface) mounting hardware: F-frame 2-pole .164-32 x 1.5 in pan-head screws and lockwashers.	A	same as above
Application	accessory	A	same as above
Cross-links	Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface-mounting hardware for individual/enclosed mounting; confirm whether used for panelboard (PRL3a/PRL4) breaker mounting.*		

EDH-EAT-01328 — 624B375G01 — Cutler-Hammer — fastener — STATUS UNKNOWN

Eaton base mounting hardware, F-frame 1-pole

OEM part number	624B375G01	A	S184 p. 12-254, Tables 12-457/12-458 Base Mounting Hardware (surface mounting; supplied only on request); oem_spec
Description	Base (surface) mounting hardware: F-frame 1-pole .164-32 x 3.188 in pan-head screws, lockwashers and clamps, individual.	A	same as above
Application	accessory	A	same as above
Cross-links	Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface-mounting hardware for individual/enclosed mounting; confirm whether used for panelboard (PRL3a/PRL4) breaker mounting.*		

EDH-EAT-01329 — 624B375G02 — Cutler-Hammer — fastener — STATUS UNKNOWN

Eaton base mounting hardware, F-frame 1-pole

OEM part number	624B375G02	A	S184 p. 12-254, Tables 12-457/12-458 Base Mounting Hardware (surface mounting; supplied only on request); oem_spec
Description	Base (surface) mounting hardware: F-frame 1-pole .164-32 x 3.188 in pan-head screws, lockwashers and clamps, group.	A	same as above
Application	accessory	A	same as above
Cross-links	Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface-mounting hardware for individual/enclosed mounting; confirm whether used for panelboard (PRL3a/PRL4) breaker mounting.*		

EDH-EAT-01331	BMH1	Cutler-Hammer	fastener	STATUS UNKNOWN

Eaton base mounting hardware, F-frame 3/4-pole

OEM part number	BMH1	A	S184 p. 12-254, Tables 12-457/12-458 Base Mounting Hardware (surface mounting; supplied only on request); oem_spec
Description	Base (surface) mounting hardware: F-frame 3/4-pole .164-32 x 1.5 in pan-head screws and lockwashers.	A	same as above
Application	accessory	A	same as above
Cross-links	Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface-mounting hardware for individual/enclosed mounting; confirm whether used for panelboard (PRL3a/PRL4) breaker mounting.*		

Breaker family Series C G-Frame (GD/GHC/GHB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00620	**3TA100G3K**	Series C G-frame multiwire connector, 3 wires/terminal	G-frame (100 A max); GD breakers require special tapping and special t A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00621	**3TA100G6K**	Series C G-frame multiwire connector, 6 wires/terminal	G-frame (100 A max); GD breakers require special tapping and special t A	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00620	3TA100G3K	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C G-frame multiwire connector, 3 wires/terminal

OEM part number	3TA100G3K	A	S184, S251 p.12-245, Table 12-456; oem_spec
Alternate / superseded numbers	UPC 786679096673	A	S251 alias; skuPage.3TA100G3K (General/Product specifications); oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	S184 p.12-245, Table 12-456; oem_spec
	Eaton molded case circuit breaker accessory multiwire connectors, Multiwire connectors, 100 A, #14-2 AWG Cu, Q18, Frame G, Series C, Three-wire	A	S251 skuPage.3TA100G3K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-245, Table 12-456; oem_spec
Installation location	load (OFF) end	A	same as above
Breaker compatibility	G-frame (100 A max); GD breakers require special tapping and special terminals	A	same as above
Breaker frame	Frame G	A	S251 skuPage.3TA100G3K (General/Product specifications); oem_spec
Current rating	100 A	A	S184, S251 p.12-245, Table 12-456; oem_spec
Kit contents	package of 3	A	S184 p.12-245, Table 12-456; oem_spec
Wire range	(3) 14-2 AWG Cu per terminal	A	same as above
	#14-2 AWG Cu	A	S251 skuPage.3TA100G3K (General/Product specifications); oem_spec
Material	tin-plated aluminum connectors	A	S184 p.12-245, Table 12-456; oem_spec

Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.3TA100G3K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.3TA100G3K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7 in, height 1 in, width 5 in, weight 0.25 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C G-Frame (GD/GHC/GHB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00621 **3TA100G6K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C G-frame multiwire connector, 6 wires/terminal

OEM part number	3TA100G6K	**A**	S184, S251 p.12-245, Table 12-456; oem_spec
Alternate / superseded numbers	UPC 786679096680	**A**	S251 alias; skuPage.3TA100G6K (General/Product specifications); oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	**A**	S184 p.12-245, Table 12-456; oem_spec
	Eaton molded case circuit breaker accessory multiwire connectors, Multiwire connectors, 100 A, #14-6 AWG Cu, Q18, Frame G, Series C, Six-wire	**A**	S251 skuPage.3TA100G6K (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-245, Table 12-456; oem_spec
Installation location	load (OFF) end	**A**	same as above
Breaker compatibility	G-frame (100 A max); GD breakers require special tapping and special terminals	**A**	same as above
Breaker frame	Frame G	**A**	S251 skuPage.3TA100G6K (General/Product specifications); oem_spec
Current rating	100 A	**A**	S184, S251 p.12-245, Table 12-456; oem_spec
Kit contents	package of 3	**A**	S184 p.12-245, Table 12-456; oem_spec
Wire range	(6) 14-6 AWG Cu per terminal	**A**	same as above
	#14-6 AWG Cu	**A**	S251 skuPage.3TA100G6K (General/Product specifications); oem_spec
Material	tin-plated aluminum connectors	**A**	S184 p.12-245, Table 12-456; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.3TA100G6K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.3TA100G6K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.2 in, height 3.3 in, width 5.4 in, weight 1.45 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C G-Frame (GD/GHC/GHB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00628	**GTSK3**	Series C G-frame terminal shield	G-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00628	GTSK3	Eaton / Cutler-Hammer	barrier	ACTIVE EATON PRODUCT P

Series C G-frame terminal shield

OEM part number	GTSK3	A	S184, S251 p.12-248, Tables 12-461..12-467; oem_spec
Alternate / superseded numbers	UPC 786679022542	A	S251 alias; skuPage.GTSK3 (General/Product specifications); oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. G-frame terminal shield	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
	Eaton molded case circuit breaker accessory handle mechanism, Terminal shield, Q3, Frame J-K, Series C	A	S251 skuPage.GTSK3 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Installation location	terminal area	A	same as above
Breaker compatibility	G-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.GTSK3 (General/Product specifications); oem_spec
Kit contents	package of 10	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.GTSK3 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.GTSK3 (General/Product specifications); oem_spec
Installation requirements	; (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 3.1 in, height 1.5 in, width 2.1 in, weight 0.05 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C G-Frame (GD/GHC/GHB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01326	**624B375G23**	Eaton base mounting hardware, G-frame	—	unknown
EDH-EAT-01327	**8703C80G05**	Eaton base mounting hardware, G-frame	—	unknown

EDH-EAT-01326	624B375G23	Cutler-Hammer	fastener	STATUS UNKNOWN

Eaton base mounting hardware, G-frame

OEM part number	624B375G23	A	S184 p. 12-254, Tables 12-457/12-458 Base Mounting Hardware (surface mounting; supplied only on request); oem_spec
Description	Base (surface) mounting hardware: G-frame mounting screw .138-32 x 2.63 in (std).	A	same as above
Application	accessory	A	same as above
Cross-links	Breakers: Series C G-Frame (GD/GHC/GHB), GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface-mounting hardware for individual/enclosed mounting; confirm whether used for panelboard (PRL3a/PRL4) breaker mounting.*		

EDH-EAT-01327	8703C80G05	Cutler-Hammer	fastener	STATUS UNKNOWN

Eaton base mounting hardware, G-frame

OEM part number	8703C80G05	**A**	S184 p. 12-254, Tables 12-457/12-458 Base Mounting Hardware (surface mounting; supplied only on request); oem_spec
Description	Base (surface) mounting hardware: G-frame mounting screw .138-32 x 3.00 in.	**A**	same as above
Application	accessory	**A**	same as above
Cross-links	Breakers: Series C G-Frame (GD/GHC/GHB), GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface-mounting hardware for individual/enclosed mounting; confirm whether used for panelboard (PRL3a/PRL4) breaker mounting.*		

Breaker family Series C J-Frame (JD/HJD/JDC/JDB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00624	**3TA250J3K**	Series C J-frame multiwire connector, 3 wires/terminal	J-frame (250 A max) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00625	**3TA250J6K**	Series C J-frame multiwire connector, 6 wires/terminal	J-frame (250 A max) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00471	**T250KB**	Series C J-frame line/load terminal, 250 A, Cu only (optional)	J-frame JD/HJD/JDC/JDB **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00470	**TA250KB**	Series C J-frame line/load terminal, 250 A, Cu/Al (standard)	J-frame JD/HJD/JDC/JDB 70-250 A (standard); also HJDDC; JG enclosed 25 **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00624	3TA250J3K	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C J-frame multiwire connector, 3 wires/terminal

OEM part number	3TA250J3K	**A**	S184, S251 p.12-245, Table 12-456; oem_spec
Alternate / superseded numbers	UPC 786679843840	**A**	S251 alias; skuPage.3TA250J3K (General/Product specifications); oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	**A**	S184 p.12-245, Table 12-456; oem_spec
	Eaton molded case circuit breaker accessory multiwire connectors, Multiwire connectors, 250 A, #14-2 AWG Cu, Q18, Frame J-K, Series C, Three-wire	**A**	S251 skuPage.3TA250J3K (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-245, Table 12-456; oem_spec
Installation location	load (OFF) end	**A**	same as above
Breaker compatibility	J-frame (250 A max)	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.3TA250J3K (General/Product specifications); oem_spec
Current rating	250 A	**A**	S184, S251 p.12-245, Table 12-456; oem_spec
Kit contents	package of 3	**A**	S184 p.12-245, Table 12-456; oem_spec
Wire range	(3) 14-2 AWG Cu per terminal	**A**	same as above
	#14-2 AWG Cu	**A**	S251 skuPage.3TA250J3K (General/Product specifications); oem_spec

Material	tin-plated aluminum connectors	A	S184 p.12-245, Table 12-456; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA250J3K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3TA250J3K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8 in, height 1 in, width 10 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00625 **3TA250J6K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C J-frame multiwire connector, 6 wires/terminal

OEM part number	3TA250J6K	A	S184, S251 p.12-245, Table 12-456; oem_spec
Alternate / superseded numbers	UPC 786679843864	A	S251 alias; skuPage.3TA250J6K (General/Product specifications); oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	S184 p.12-245, Table 12-456; oem_spec
	Eaton molded case circuit breaker accessory multiwire connectors, Multiwire connectors, 250 A, #14-6 AWG Cu, Q18, Frame J-K, Six-wire	A	S251 skuPage.3TA250J6K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-245, Table 12-456; oem_spec
Installation location	load (OFF) end	A	same as above
Breaker compatibility	J-frame (250 A max)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA250J6K (General/Product specifications); oem_spec
Current rating	250 A	A	S184, S251 p.12-245, Table 12-456; oem_spec
Kit contents	package of 3	A	S184 p.12-245, Table 12-456; oem_spec
Wire range	(6) 14-6 AWG Cu per terminal	A	same as above
	#14-6 AWG Cu	A	S251 skuPage.3TA250J6K (General/Product specifications); oem_spec
Material	tin-plated aluminum connectors	A	S184 p.12-245, Table 12-456; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA250J6K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3TA250J6K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8 in, height 1 in, width 8 in, weight 0.15 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00471 **T250KB** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C J-frame line/load terminal, 250 A, Cu only (optional)

OEM part number	T250KB	**A**	S184, S251 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Alternate / superseded numbers	UPC 786679511923	**A**	S251 alias; skuPage.T250KB (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal; stainless steel body; collar/slotted nut and screw	**A**	S184 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
	Eaton molded case circuit breaker accessory terminal, Optional Cu pressure terminals, 250 A, #4 AWG-350 kcmil Cu, For type JB, KB and J-frame breakers, Frame J-K, Series C, Line and load	**A**	S251 skuPage.T250KB (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Breaker compatibility	J-frame JD/HJD/JDC/JDB	**A**	same as above
	For type JB,KB and J-frame breakers (Eaton web 'Used with' attribute)	**A**	S251 skuPage.T250KB (General/Product specifications); oem_spec
Breaker frame	Frame J-K	**A**	same as above
Current rating	250 A	**A**	S184, S251 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Kit contents	1 terminal	**A**	S184 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Wire range	4-350 kcmil (25-185 mm2) Cu only	**A**	same as above
	#4 AWG-350 kcmil Cu	**A**	S251 skuPage.T250KB (General/Product specifications); oem_spec
Material	stainless steel body	**A**	S184 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.T250KB (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.T250KB (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.6 in, height 0.9 in, width 1.6 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Some distributors list body material as copper - OEM says stainless steel.*		

EDH-EAT-00470	**TA250KB**	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C J-frame line/load terminal, 250 A, Cu/Al (standard)

OEM part number	TA250KB	**A**	S184, S251 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Alternate / superseded numbers	UPC 786679511961	**A**	S251 alias; skuPage.TA250KB (General/Product specifications); oem_spec

Description	Standard Cu/Al pressure terminal; bottom has recess positioned over J-frame terminal conductor; individually packed; no dual lugs	A	S184 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
	Eaton molded case circuit breaker accessory terminal, Optional Cu pressure terminals, 250 A, #4 AWG-350 kcmil Cu, Frame J-K, Series C, Line and load	A	S251 skuPage.TA250KB (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Breaker compatibility	J-frame JD/HJD/JDC/JDB 70-250 A (standard); also HJDDC; JG enclosed 250 A (s7 V4-T2-345)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.TA250KB (General/Product specifications); oem_spec
Current rating	250 A	A	S184, S251 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Kit contents	1 terminal (individually packed)	A	S184 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Wire range	4-350 kcmil (25-185 mm2) Cu/Al	A	same as above
	#4 AWG-350 kcmil Cu	A	S251 skuPage.TA250KB (General/Product specifications); oem_spec
Material	aluminum body	A	S184 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Torque values	275 lb-in (31 N-m) per J-frame IL table (search snippet) (Torque value seen only in search-result snippet of Eaton IL29C402D; not verified from downloaded document)	C	S185 oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA250KB (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.TA250KB (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2 in, height 0.9 in, width 1 in, weight 0.07 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB), Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00689	**2600D26G01**	Series C J-frame panelboard connecting strap, center pole, 3.50 in, 250 A	J-frame in panelboards (bus spacing per description) A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00690	**2600D26G02**	Series C J-frame panelboard connecting strap, outside pole, 3.50 in, 250 A	J-frame in panelboards (bus spacing per description) A	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00689	2600D26G01	Eaton / Cutler-Hammer	connector-strap	ACTIVE EATON PRODUCT P

Series C J-frame panelboard connecting strap, center pole, 3.50 in, 250 A

OEM part number	2600D26G01	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679305072	A	S251 alias; skuPage.2600D26G01 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 250 A	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breakers electrical aftermarket accessory panelboard connecting strap, Panelboard connecting straps, G01, 250 A, Center pole, J-Frame breakers, Series C	A	S251 skuPage.2600D26G01 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	J-frame in panelboards (bus spacing per description)	A	same as above
	J-Frame breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.2600D26G01 (General/Product specifications); oem_spec
Current rating	250 A	A	same as above
Kit contents	G01 (Eaton web 'Special features' attribute)	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.2600D26G01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.5 in, height 2.6 in, width 2.5 in, weight 0.8 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00690	2600D26G02	Eaton / Cutler-Hammer	connector-strap	ACTIVE EATON PRODUCT P

Series C J-frame panelboard connecting strap, outside pole, 3.50 in, 250 A

OEM part number	2600D26G02	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679831205	A	S251 alias; skuPage.2600D26G02 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 250 A	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G02, 250 A, Outside pole, J-Frame breakers, Frame J-K, Series C	A	S251 skuPage.2600D26G02 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	J-frame in panelboards (bus spacing per description)	A	same as above
	J-Frame breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.2600D26G02 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	250 A	A	same as above
Kit contents	G02 (Eaton web 'Special features' attribute)	A	same as above

Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	same as above
Listing / approvals	UL Listed	**A**	S251 skuPage.2600D26G02 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.8 in, height 2.5 in, width 2.9 in, weight 1.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00635	**1266C07G01**	Series C J-frame terminal shield 2/3-pole, line end	J-frame **A**	unknown
EDH-EAT-00636	**6631C01G01**	Series C J-frame terminal shield 4-pole, line end	J-frame **A**	unknown
EDH-EAT-00637	**6641C16G01**	Series C J-frame terminal shield 2/3-pole, load end	J-frame **A**	unknown
EDH-EAT-00638	**6641C16G02**	Series C J-frame terminal shield 4-pole, load end	J-frame **A**	unknown
EDH-EAT-00651	**IPB2**	Series C interphase barrier (J, K per newer table)	J, K frames (per KM page) **C**	unknown
EDH-EAT-00648	**IPB3**	Series C interphase barrier (J, K)	J, K (2008 Table 12-469); LG (2008 Table 12-67); KM reproduction: L **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00635 — 1266C07G01 — Eaton / Cutler-Hammer — barrier — STATUS UNKNOWN

Series C J-frame terminal shield 2/3-pole, line end

OEM part number	1266C07G01	**A**	S184 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. J-frame terminal shield 2/3-pole, line end	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line terminal area	**A**	same as above
Breaker compatibility	J-frame	**A**	same as above
Poles	2,3	**A**	same as above
Kit contents	package of 10	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00636 — 6631C01G01 — Eaton / Cutler-Hammer — barrier — STATUS UNKNOWN

Series C J-frame terminal shield 4-pole, line end

OEM part number	6631C01G01	**A**	S184 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. J-frame terminal shield 4-pole, line end	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line terminal area	**A**	same as above
Breaker compatibility	J-frame	**A**	same as above
Poles	4	**A**	same as above
Kit contents	package of 10	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00637	6641C16G01	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C J-frame terminal shield 2/3-pole, load end

OEM part number	6641C16G01	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. J-frame terminal shield 2/3-pole, load end	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	J-frame	A	same as above
Poles	2,3	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller reproduction lists 6641C16G01/G02 as 'Line End'; 2008 OEM table says Load End.*		

EDH-EAT-00638	6641C16G02	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C J-frame terminal shield 4-pole, load end

OEM part number	6641C16G02	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. J-frame terminal shield 4-pole, load end	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	J-frame	A	same as above
Poles	4	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller reproduction lists 6641C16G01/G02 as 'Line End'; 2008 OEM table says Load End.*		

EDH-EAT-00651	IPB2	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C interphase barrier (J, K per newer table)

OEM part number	IPB2	C	S191 distributor
Description	Interphase barriers, 2 per package (reseller reproduction of newer Eaton table)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	J, K frames (per KM page)	C	same as above
Kit contents	2 per package	C	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB), Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Not in 2008 OEM table (which assigns IPB3 to J/K) - confirm in current CA08100005E.*		

EDH-EAT-00648	IPB3	Eaton / Cutler-Hammer	barrier	ACTIVE EATON PRODUCT P

Series C interphase barrier (J, K)

OEM part number	IPB3	**A**	S184, S251 p.12-249, Table 12-469; oem_spec
Alternate / superseded numbers	UPC 786679114278	**A**	S251 alias; skuPage.IPB3 (General/Product specifications); oem_spec
Description	Interphase barriers: high-dielectric insulating plates installed in molded slots between terminals for added clearance; field installation only; two per package (Conflicting assignments between sources)	**A**	S184 p.12-249, Table 12-469; oem_spec
	Eaton molded case circuit breaker accessory interphase barrier, Interphase barriers, Q13, Frame J-K, Series C	**A**	S251 skuPage.IPB3 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-249, Table 12-469; oem_spec
Breaker compatibility	J, K (2008 Table 12-469); LG (2008 Table 12-67); KM reproduction: L	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.IPB3 (General/Product specifications); oem_spec
Kit contents	2 per package	**A**	S184 p.12-249, Table 12-469; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.IPB3 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.IPB3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 0.3 in, width 3.7 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB), Series C K-Frame (KD/HKD/KDC/KDB), Series C L-Frame (LD/HLD/LDC/LDB), Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Which frames does IPB3 fit? 2008 Table 12-469 says J,K; KM reproduction of newer table says J,K = IPB2 and L = IPB3.*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00615	**PLN2**	Series C J-frame plug nut (.250-20)	J-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00616	**PLN2M**	Series C J-frame plug nut (M6)	J-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00615	PLN2	Eaton / Cutler-Hammer	fastener	ACTIVE EATON PRODUCT P

Series C J-frame plug nut (.250-20)

OEM part number	PLN2	A	S184, S251 p.12-244, Table 12-450; oem_spec
Alternate / superseded numbers	UPC 786679761304	A	S251 alias; skuPage.PLN2 (General/Product specifications); oem_spec
Description	Plug nut press-fit into opening in J-frame terminal conductor for screw-connected ring-type terminals; screws and washers by customer	A	S184 p.12-244, Table 12-450; oem_spec
	Eaton molded case circuit breaker accessory hardware, Imperial plug nut, Frame J-K, Series C, 0.250-20	A	S251 skuPage.PLN2 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-244, Table 12-450; oem_spec
Breaker compatibility	J-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.PLN2 (General/Product specifications); oem_spec
Kit contents	package of 6	A	S184 p.12-244, Table 12-450; oem_spec
Fasteners	thread .250-20	A	S184 p.12-244; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.PLN2 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.PLN2 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1.5 in, height 0.7 in, width 1.2 in, weight 0.04 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00616	PLN2M	Eaton / Cutler-Hammer	fastener	ACTIVE EATON PRODUCT P

Series C J-frame plug nut (M6)

OEM part number	PLN2M	**A**	S184, S251 p.12-244, Table 12-450; oem_spec
Alternate / superseded numbers	UPC 786679559765	**A**	S251 alias; skuPage.PLN2M (General/Product specifications); oem_spec
Description	Plug nut press-fit into opening in J-frame terminal conductor for screw-connected ring-type terminals; screws and washers by customer	**A**	S184 p.12-244, Table 12-450; oem_spec
	Eaton molded case circuit breaker accessory hardware, Eaton molded case circuit breaker accessory hardware, Metric plug nut, Frame J-K, M-6	**A**	S251 skuPage.PLN2M (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-244, Table 12-450; oem_spec
Breaker compatibility	J-frame	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.PLN2M (General/Product specifications); oem_spec
Kit contents	package of 6	**A**	S184 p.12-244, Table 12-450; oem_spec
Fasteners	thread M6	**A**	S184 p.12-244; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.PLN2M (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.PLN2M (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 1 in, width 1 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00656	**5010D23G01**	Series C J-frame rear connecting stud, 250 A short stud	J-frame fixed-mounted **A**	unknown
EDH-EAT-00657	**5010D23G02**	Series C J-frame rear connecting stud, 250 A long stud	J-frame fixed-mounted **A**	unknown
EDH-EAT-00619	**KCWTK**	Series C J/K-frame control wire terminal kit	J/K-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00597	**KPEK2**	Series C J-frame end cap kit, 3-pole, .312-18	J-frame 3-pole **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00599	**KPEK24**	Series C J-frame end cap kit, 4-pole, .312-18	J-frame 4-pole **A**	unknown
EDH-EAT-00598	**KPEKM2**	Series C J-frame end cap kit, 3-pole, M8	J-frame 3-pole **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00600	**KPEKM24**	Series C J-frame end cap kit, 4-pole, M8	J-frame 4-pole **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00656	5010D23G01	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame rear connecting stud, 250 A short stud

OEM part number	5010D23G01	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 250 A short stud; tubes 456D983H05-H07	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	J-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 456D983H05/H06/H07 ordered separately by panel thickness	A	same as above
Fasteners	.31-18 / .50-13 thread	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00657	5010D23G02	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame rear connecting stud, 250 A long stud

OEM part number	5010D23G02	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 250 A long stud; tubes 5010D23H05-H07	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	J-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 5010D23H05/H06/H07 ordered separately by panel thickness	A	same as above
Fasteners	.31-18 / .50-13 thread	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00619	KCWTK	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C J/K-frame control wire terminal kit

OEM part number	KCWTK	A	S184, S251 p.12-244, Tables 12-452..12-454; oem_spec
Alternate / superseded numbers	UPC 786679200605	A	S251 alias; skuPage.KCWTK (General/Product specifications); oem_spec
Description	J- and K-frame control wire terminal kit (12 tangs); not for use with T250KB terminals; taps control power using male quick-disconnect	A	S184 p.12-244, Tables 12-452..12-454; oem_spec
	Eaton molded case circuit breaker accessory terminal kit, Control wire terminal kit, Q12, Frame J-K, Series C	A	S251 skuPage.KCWTK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-244, Tables 12-452..12-454; oem_spec
Breaker compatibility	J/K-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.KCWTK (General/Product specifications); oem_spec
Kit contents	package of 12 control wire tangs, priced individually	A	S184 p.12-244, Tables 12-452..12-454; oem_spec
	12 pack (Eaton web 'Special features' attribute)	A	S251 skuPage.KCWTK (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL Listed	A	S251 skuPage.KCWTK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1.5 in, height 0.01 in, width 0.5 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB), Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00597	KPEK2	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C J-frame end cap kit, 3-pole, .312-18

OEM part number	KPEK2	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 782114291870	A	S251 alias; skuPage.KPEK2 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Imperial end cap kit, Three-pole, Frame J, Series C, 0.312-18	A	S251 skuPage.KPEK2 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	J-frame 3-pole	A	same as above
Breaker frame	Frame J	A	S251 skuPage.KPEK2 (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-243, Table 12-447; oem_spec
Fasteners	thread .312-18	A	S184 p.12-243, Table 12-447; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEK2 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.KPEK2 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.25 in, height 2.5 in, width 2.5 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00599	KPEK24	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame end cap kit, 4-pole, .312-18

OEM part number	KPEK24	A	S184 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	J-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00598	KPEKM2	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C J-frame end cap kit, 3-pole, M8

OEM part number	KPEKM2	**A**	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 782114291887	**A**	S251 alias; skuPage.KPEKM2 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	**A**	S184 p.12-243, Table 12-447; oem_spec
	3P TYPE JD ENDSHIELD KIT, METRIC HARDWARE LINE OR LOAD	**A**	S251 skuPage.KPEKM2 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	**A**	same as above
Breaker compatibility	J-frame 3-pole	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.KPEKM2 (General/Product specifications); oem_spec
Poles	3	**A**	S184, S251 p.12-243, Table 12-447; oem_spec
Fasteners	thread M8	**A**	S184 p.12-243, Table 12-447; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.KPEKM2 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.KPEKM2 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.25 in, height 2.5 in, width 2.5 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00600	KPEKM24	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C J-frame end cap kit, 4-pole, M8

OEM part number	KPEKM24	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 782114291900	A	S251 alias; skuPage.KPEKM24 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Metric end cap kit, Four-pole, Frame J-K, Series C, M-8	A	S251 skuPage.KPEKM24 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	J-frame 4-pole	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.KPEKM24 (General/Product specifications); oem_spec
Poles	4	A	S184, S251 p.12-243, Table 12-447; oem_spec
Fasteners	thread M8	A	S184 p.12-243, Table 12-447; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEKM24 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.KPEKM24 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.25 in, height 2.5 in, width 2.5 in, weight 0.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker family Series C J-frame (JD/JDB/HJD/JDC)

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01332	**BMH2**	Eaton base mounting hardware, J-frame	—	unknown

EDH-EAT-01332	BMH2	Cutler-Hammer	fastener	STATUS UNKNOWN

Eaton base mounting hardware, J-frame

OEM part number	BMH2	A	S184 p. 12-254, Tables 12-457/12-458 Base Mounting Hardware (surface mounting; supplied only on request); oem_spec
Description	Base (surface) mounting hardware: J-frame .250-20 x 2.75 in pan-head screws and lockwashers.	A	same as above
Application	accessory	A	same as above
Cross-links	Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface-mounting hardware for individual/enclosed mounting; confirm whether used for panelboard (PRL3a/PRL4) breaker mounting.*		

Breaker family Series C K-Frame (KD/HKD/KDC/KDB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00479	**2T400K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00494	**2T400KCW**	Series C K-frame terminal kit with control wire termination (2T400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00488	**2T402K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00474	**2TA400K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00491	**2TA400KCW**	Series C K-frame terminal kit with control wire termination (2TA400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00482	**2TA401K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00497	**2TA401KCW**	Series C K-frame terminal kit with control wire termination (2TA401K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00485	**2TA402K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00480	**3T400K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00495	**3T400KCW**	Series C K-frame terminal kit with control wire termination (3T400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00489	**3T402K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00475	**3TA400K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; also KP definite purpose/KG/HKDDC 400 A **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00626	**3TA400K3K**	Series C K-frame multiwire connector, 3 wires/terminal	K-frame (400 A max) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00627	**3TA400K6K**	Series C K-frame multiwire connector, 6 wires/terminal	K-frame (400 A max) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00492	**3TA400KCW**	Series C K-frame terminal kit with control wire termination (3TA400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00483	**3TA401K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00498	**3TA401KCW**	Series C K-frame terminal kit with control wire termination (3TA401K)	K-frame KD/HKD/KDC **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00486	**3TA402K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00481	**4T400K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00496	**4T400KCW**	Series C K-frame terminal kit with control wire termination (4T400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00490	**4T402K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00476	**4TA400K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00493	**4TA400KCW**	Series C K-frame terminal kit with control wire termination (4TA400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00484	**4TA401K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00499	**4TA401KCW**	Series C K-frame terminal kit with control wire termination (4TA401K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00487	**4TA402K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00477	**T300K**	Series C K-frame line/load terminal , 225 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00478	**T350K**	Series C K-frame line/load terminal , 350 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00472	**TA300K**	Series C K-frame line/load terminal , 225 A, Cu/Al	K-frame KD/HKD/KDC/KDB; TA300K: standard for KES electronic ratings to **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00473	**TA350K**	Series C K-frame line/load terminal , 350 A, Cu/Al	K-frame KD/HKD/KDC/KDB; also KG enclosed/KP definite purpose 400 A, HK **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00479 **2T400K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	2T400K	**A**	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679410400	**A**	S251 alias; skuPage.2T400K (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	**A**	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal, 400 A, Two-pole, (2) #3/0 AWG-250 kcmil Cu, Frame J-K, Series C, Pressure type line and load	**A**	S251 skuPage.2T400K (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.2T400K (General/Product specifications); oem_spec
Poles	2	**A**	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	**A**	S184 p.12-113, Table 12-199; oem_spec
	400 A	**A**	S251 skuPage.2T400K (General/Product specifications); oem_spec
Kit contents	2-pole kit	**A**	S184 p.12-113, Table 12-199; oem_spec
Wire range	3/0-250 kcmil (2) (95-120 mm2)	**A**	same as above
	(2) #3/0 AWG-250 kcmil Cu	**A**	S251 skuPage.2T400K (General/Product specifications); oem_spec
Material	terminal body copper	**A**	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.2T400K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.2T400K (General/Product specifications); oem_spec

Package data (not part dims)	Eaton logistics attributes: length/depth 6.5 in, height 4.5 in, width 4 in, weight 1.649 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00494 **2T400KCW** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series C K-frame terminal kit with control wire termination (2T400K)

OEM part number	2T400KCW	A	S184 p.12-113, Table 12-199; oem_spec
Description	Same as 2T400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00488 **2T402K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	2T402K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 782113526904	A	S251 alias; skuPage.2T402K (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal, 400 A, Two-pole, 500-700 kcmil Cu/Al, Series C, Pressure type line and load	A	S251 skuPage.2T402K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	2	A	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec
	400 A	A	S251 skuPage.2T402K (General/Product specifications); oem_spec
Kit contents	2-pole kit	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	500-750 kcmil (1) (- mm2)	A	same as above
	500-700 kcmil Cu/Al	A	S251 skuPage.2T402K (General/Product specifications); oem_spec
Material	terminal body copper	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.2T402K (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.2T402K (General/Product specifications); oem_spec

Package data (not part dims)	Eaton logistics attributes: length/depth 6.06 in, height 4.25 in, width 3.75 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00474	2TA400K	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	2TA400K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679410417	A	S251 alias; skuPage.2TA400K (General/Product specifications); oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal, 400 A, Two-pole, (2) #3/0 AWG-250 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	A	S251 skuPage.2TA400K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.2TA400K (General/Product specifications); oem_spec
Poles	2	A	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec
	400 A	A	S251 skuPage.2TA400K (General/Product specifications); oem_spec
Kit contents	2-pole kit: one terminal per pole + one terminal cover	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
	(2) #3/0 AWG-250 kcmil Cu/Al	A	S251 skuPage.2TA400K (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.2TA400K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.2TA400K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.4 in, height 4.7 in, width 4 in, weight 0.9 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00491	2TA400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (2TA400K)

OEM part number	2TA400KCW	A	S184 p.12-113, Table 12-199; oem_spec
Description	Same as 2TA400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit: one terminal per pole + one terminal cover	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00482	2TA401K	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	2TA401K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679225424	A	S251 alias; skuPage.2TA401K (General/Product specifications); oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal, 400 A, Two-pole, (2) #2/0 AWG-250 kcmil or (1) 2/0-500 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	A	S251 skuPage.2TA401K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.2TA401K (General/Product specifications); oem_spec
Poles	2	A	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec
	400 A	A	S251 skuPage.2TA401K (General/Product specifications); oem_spec
Kit contents	2-pole kit	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-120 / 70-240 mm2)	A	same as above
	(1) 2/0-500 kcmil Cu/Al; (2) #2/0 AWG-250 kcmil	A	S251 skuPage.2TA401K (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.2TA401K (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.2TA401K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4 in, height 4.75 in, width 6.25 in, weight 0.86 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above

Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00497	2TA401KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (2TA401K)

OEM part number	2TA401KCW	A	S184 p.12-113, Table 12-199; oem_spec
Description	Same as 2TA401K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit	A	same as above
Wire range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-120 / 70-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00485	2TA402K	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	2TA402K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679106808	A	S251 alias; skuPage.2TA402K (General/Product specifications); oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal, 400 A, Two-pole, 500-750 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	A	S251 skuPage.2TA402K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.2TA402K (General/Product specifications); oem_spec
Poles	2	A	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec
	400 A	A	S251 skuPage.2TA402K (General/Product specifications); oem_spec
Kit contents	2-pole kit	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	500-750 kcmil (1) (300-400 mm2)	A	same as above
	500-750 kcmil Cu/Al	A	S251 skuPage.2TA402K (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.2TA402K (General/Product specifications); oem_spec

Listing / approvals	UL Listed	**A**	S251 skuPage.2TA402K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.3 in, height 1.4 in, width 1.6 in, weight 0.05 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00480 **3T400K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	3T400K	**A**	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679149430	**A**	S251 alias; skuPage.3T400K (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	**A**	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Terminal, 400 A, Three-pole, (2) #3/0 AWG-250 kcmil Cu, Frame J-K, Series C, Pressure type line and load	**A**	S251 skuPage.3T400K (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.3T400K (General/Product specifications); oem_spec
Poles	3	**A**	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	**A**	S184 p.12-113, Table 12-199; oem_spec
	400 A	**A**	S251 skuPage.3T400K (General/Product specifications); oem_spec
Kit contents	3-pole kit	**A**	S184 p.12-113, Table 12-199; oem_spec
Wire range	3/0-250 kcmil (2) (95-120 mm2)	**A**	same as above
	(2) #3/0 AWG-250 kcmil Cu	**A**	S251 skuPage.3T400K (General/Product specifications); oem_spec
Material	terminal body copper	**A**	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.3T400K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.3T400K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.5 in, height 4.8 in, width 3.9 in, weight 2.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00495	3T400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (3T400K)

OEM part number	3T400KCW	A	S184 p.12-113, Table 12-199; oem_spec
Description	Same as 3T400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00489	3T402K	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	3T402K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 782113526898	A	S251 alias; skuPage.3T402K (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Terminal, 400 A, Three-pole, 500-700 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	A	S251 skuPage.3T402K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3T402K (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec
	400 A	A	S251 skuPage.3T402K (General/Product specifications); oem_spec
Kit contents	3-pole kit	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	500-750 kcmil (1) (- mm2)	A	same as above
	500-700 kcmil Cu/Al	A	S251 skuPage.3T402K (General/Product specifications); oem_spec
Material	terminal body copper	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3T402K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3T402K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.06 in, height 4.25 in, width 3.75 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above

Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00475	3TA400K	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA400K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679149416	A	S251 alias; skuPage.3TA400K (General/Product specifications); oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal, 400 A, Three-pole, (2) #3/0 AWG-250 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	A	S251 skuPage.3TA400K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB; also KP definite purpose/KG/HKDDC 400 A	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA400K (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec
	400 A	A	S251 skuPage.3TA400K (General/Product specifications); oem_spec
Kit contents	3-pole kit: one terminal per pole + one terminal cover	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
	(2) #3/0 AWG-250 kcmil Cu/Al	A	S251 skuPage.3TA400K (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA400K (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.3TA400K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.4 in, height 4.7 in, width 4 in, weight 1.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00626	3TA400K3K	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C K-frame multiwire connector, 3 wires/terminal

OEM part number	3TA400K3K	A	S184, S251 p.12-245, Table 12-456; oem_spec
Alternate / superseded numbers	UPC 786679094723	A	S251 alias; skuPage.3TA400K3K (General/Product specifications); oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	S184 p.12-245, Table 12-456; oem_spec

	Eaton molded case circuit breaker accessory multiwire connectors, Multiwire connectors, 400 A, #14-2/0 AWG Cu, Q18, Frame J-K, Series C, Three-wire	A	S251 skuPage.3TA400K3K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-245, Table 12-456; oem_spec
Installation location	load (OFF) end	A	same as above
Breaker compatibility	K-frame (400 A max)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA400K3K (General/Product specifications); oem_spec
Current rating	400 A	A	S184, S251 p.12-245, Table 12-456; oem_spec
Kit contents	package of 3	A	S184 p.12-245, Table 12-456; oem_spec
Wire range	(3) 14-2/0 AWG Cu per terminal	A	same as above
	#14-2/0 AWG Cu	A	S251 skuPage.3TA400K3K (General/Product specifications); oem_spec
Material	tin-plated aluminum connectors	A	S184 p.12-245, Table 12-456; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA400K3K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3TA400K3K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.5 in, height 5 in, width 4 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00627 **3TA400K6K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C K-frame multiwire connector, 6 wires/terminal

OEM part number	3TA400K6K	A	S184, S251 p.12-245, Table 12-456; oem_spec
Alternate / superseded numbers	UPC 786679094730	A	S251 alias; skuPage.3TA400K6K (General/Product specifications); oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	S184 p.12-245, Table 12-456; oem_spec
	Eaton molded case circuit breaker accessory multiwire connectors, Multiwire connectors, 400 A, #14-3 AWG Cu, Q18, Frame J-K, Series C, Six-wire	A	S251 skuPage.3TA400K6K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-245, Table 12-456; oem_spec
Installation location	load (OFF) end	A	same as above
Breaker compatibility	K-frame (400 A max)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA400K6K (General/Product specifications); oem_spec
Current rating	400 A	A	S184, S251 p.12-245, Table 12-456; oem_spec
Kit contents	package of 3	A	S184 p.12-245, Table 12-456; oem_spec
Wire range	(6) 14-3 AWG Cu per terminal	A	same as above

	#14-3 AWG Cu	A	S251 skuPage.3TA400K6K (General/Product specifications); oem_spec
Material	tin-plated aluminum connectors	A	S184 p.12-245, Table 12-456; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA400K6K (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.3TA400K6K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.5 in, height 5 in, width 4 in, weight 1.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00492 **3TA400KCW** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series C K-frame terminal kit with control wire termination (3TA400K)

OEM part number	3TA400KCW	A	S184 p.12-113, Table 12-199; oem_spec
Description	Same as 3TA400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit: one terminal per pole + one terminal cover	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00483 **3TA401K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA401K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679884010	A	S251 alias; skuPage.3TA401K (General/Product specifications); oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal, 400 A, Three-pole, (2) #2/0 AWG-250 kcmil or (1) 2/0-500 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	A	S251 skuPage.3TA401K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA401K (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec
	400 A	A	S251 skuPage.3TA401K (General/Product specifications); oem_spec

Kit contents	3-pole kit	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-240 mm2)	A	same as above
	(1) 2/0-500 kcmil Cu/Al; (2) #2/0 AWG-250 kcmil	A	S251 skuPage.3TA401K (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA401K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3TA401K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7 in, height 5 in, width 4 in, weight 1.05 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00498 3TA401KCW Eaton / Cutler-Hammer lug-kit ACTIVE EATON PRODUCT P

Series C K-frame terminal kit with control wire termination (3TA401K)

OEM part number	3TA401KCW	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679064115	A	S251 alias; skuPage.3TA401KCW (General/Product specifications); oem_spec
Description	Same as 3TA401K but with control wire termination	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal with control wire termination, 400 A, Three-pole, (2) #2/0 AWG-250 kcmil or (1) 2/0-500 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	A	S251 skuPage.3TA401KCW (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA401KCW (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec
	400 A	A	S251 skuPage.3TA401KCW (General/Product specifications); oem_spec
Kit contents	3-pole kit	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-240 mm2)	A	same as above
	(1) 2/0-500 kcmil Cu/Al; (2) #2/0 AWG-250 kcmil	A	S251 skuPage.3TA401KCW (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA401KCW (General/Product specifications); oem_spec

Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.3TA401KCW (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.5 in, height 4.75 in, width 4.25 in, weight 1.05 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00486 **3TA402K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA402K	**A**	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679106792	**A**	S251 alias; skuPage.3TA402K (General/Product specifications); oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	**A**	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Terminal, 400 A, Three-pole, 500-750 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	**A**	S251 skuPage.3TA402K (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.3TA402K (General/Product specifications); oem_spec
Poles	3	**A**	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	**A**	S184 p.12-113, Table 12-199; oem_spec
	400 A	**A**	S251 skuPage.3TA402K (General/Product specifications); oem_spec
Kit contents	3-pole kit	**A**	S184 p.12-113, Table 12-199; oem_spec
Wire range	500-750 kcmil (1) (300-400 mm2)	**A**	same as above
	500-750 kcmil Cu/Al	**A**	S251 skuPage.3TA402K (General/Product specifications); oem_spec
Material	terminal body aluminum	**A**	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.3TA402K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.3TA402K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.2 in, height 4.6 in, width 3.8 in, weight 1.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00481	4T400K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	4T400K	A	S184 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00496	4T400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (4T400K)

OEM part number	4T400KCW	A	S184 p.12-113, Table 12-199; oem_spec
Description	Same as 4T400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00490	4T402K	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	4T402K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 782113526911	A	S251 alias; skuPage.4T402K (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory terminal kit, Accessories and terminals, Series C	A	S251 skuPage.4T402K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Wire range	500-750 kcmil (1) (- mm2)	A	same as above
Material	terminal body copper	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.4T402K (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.4T402K (General/Product specifications); oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00476	4TA400K	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA400K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679251553	A	S251 alias; skuPage.4TA400K (General/Product specifications); oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Terminal, 400 A, Four-pole, (2) #3/0 AWG-250 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	A	S251 skuPage.4TA400K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.4TA400K (General/Product specifications); oem_spec
Poles	4	A	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec
	400 A	A	S251 skuPage.4TA400K (General/Product specifications); oem_spec

Kit contents	4-pole kit: one terminal per pole + one terminal cover	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
	(2) #3/0 AWG-250 kcmil Cu/Al	A	S251 skuPage.4TA400K (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.4TA400K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.4TA400K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7 in, height 5 in, width 4 in, weight 1.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00493 4TA400KCW Eaton / Cutler-Hammer lug-kit STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (4TA400K)

OEM part number	4TA400KCW	A	S184 p.12-113, Table 12-199; oem_spec
Description	Same as 4TA400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit: one terminal per pole + one terminal cover	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00484 4TA401K Eaton / Cutler-Hammer lug-kit ACTIVE EATON PRODUCT P

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA401K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679022153	A	S251 alias; skuPage.4TA401K (General/Product specifications); oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Terminal, 400 A, Four-pole, (2) #2/0 AWG-250 kcmil or (1) 2/0-500 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	A	S251 skuPage.4TA401K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.4TA401K (General/Product specifications); oem_spec
Poles	4	A	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec

	400 A	A	S251 skuPage.4TA401K (General/Product specifications); oem_spec
Kit contents	4-pole kit	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-240 mm2)	A	same as above
	(1) 2/0-500 kcmil Cu/Al; (2) #2/0 AWG-250 kcmil	A	S251 skuPage.4TA401K (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.4TA401K (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.4TA401K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4 in, height 2 in, width 2 in, weight 4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00499 **4TA401KCW** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series C K-frame terminal kit with control wire termination (4TA401K)

OEM part number	4TA401KCW	A	S184 p.12-113, Table 12-199; oem_spec
Description	Same as 4TA401K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Wire range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00487 **4TA402K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA402K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679106815	A	S251 alias; skuPage.4TA402K (General/Product specifications); oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Terminal, 400 A, Four-pole, 500-750 kcmil Cu/Al, Series C, Pressure type line and load	A	S251 skuPage.4TA402K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	S184, S251 p.12-113, Table 12-199; oem_spec
Current rating	400 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec

	400 A	A	S251 skuPage.4TA402K (General/Product specifications); oem_spec
Kit contents	4-pole kit (KM: with three interphase barriers)	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	500-750 kcmil (1) (300-400 mm2)	A	same as above
	500-750 kcmil Cu/Al	A	S251 skuPage.4TA402K (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.4TA402K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.4TA402K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.3 in, height 1.4 in, width 1.5 in, weight 0.05 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00477 **T300K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C K-frame line/load terminal , 225 A, Cu

OEM part number	T300K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679511930; EAN; 4015081502813	A	S251 alias; skuPage.T300K (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton Distribution parts T 300	A	S251 skuPage.T300K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.T300K (General/Product specifications); oem_spec
Current rating	225 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec
	225 A	A	S251 skuPage.T300K (General/Product specifications); oem_spec
Kit contents	1 terminal	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	3 AWG-350 kcmil (1) (35-185 mm2)	A	same as above
	#3 AWG-350 kcmil Cu	A	S251 skuPage.T300K (General/Product specifications); oem_spec
Material	terminal body copper	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.T300K (General/Product specifications); oem_spec

Listing / approvals	UL Listed; RoHS conform	**A**	S251 skuPage.T300K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 55.88 mm, height 40.64 mm, width 38.1 mm, weight 0.136 kg (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00478 **T350K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C K-frame line/load terminal , 350 A, Cu

OEM part number	T350K	**A**	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679511909	**A**	S251 alias; skuPage.T350K (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	**A**	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Terminal, 400 A, 250-500 kcmil Cu, Frame J-K, Series C, Pressure type line and load	**A**	S251 skuPage.T350K (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.T350K (General/Product specifications); oem_spec
Current rating	350 A max breaker	**A**	S184 p.12-113, Table 12-199; oem_spec
	400 A	**A**	S251 skuPage.T350K (General/Product specifications); oem_spec
Kit contents	1 terminal	**A**	S184 p.12-113, Table 12-199; oem_spec
Wire range	250-500 kcmil (1) (120-240 mm2)	**A**	same as above
	250-500 kcmil Cu	**A**	S251 skuPage.T350K (General/Product specifications); oem_spec
Material	terminal body copper	**A**	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.T350K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.T350K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2 in, height 1.3 in, width 1.5 in, weight 0.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00472 **TA300K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C K-frame line/load terminal , 225 A, Cu/Al

OEM part number	TA300K	**A**	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679422458	**A**	S251 alias; skuPage.TA300K (General/Product specifications); oem_spec

Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal, 225 A, #3 AWG-350 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	A	S251 skuPage.TA300K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB; TA300K: standard for KES electronic ratings to 225-300 A; HKDDC 225 A	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.TA300K (General/Product specifications); oem_spec
Current rating	225 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec
	225 A	A	S251 skuPage.TA300K (General/Product specifications); oem_spec
Kit contents	1 terminal (individually packed)	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	3 AWG-350 kcmil (1) (35-185 mm2)	A	same as above
	#3 AWG-350 kcmil Cu/Al	A	S251 skuPage.TA300K (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA300K (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.TA300K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.3 in, height 1.4 in, width 1.5 in, weight 0.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00473 **TA350K** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C K-frame line/load terminal , 350 A, Cu/Al

OEM part number	TA350K	A	S184, S251 p.12-113, Table 12-199; oem_spec
Alternate / superseded numbers	UPC 786679422465	A	S251 alias; skuPage.TA350K (General/Product specifications); oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	S184 p.12-113, Table 12-199; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal, 400 A, 250-500 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	A	S251 skuPage.TA350K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-113, Table 12-199; oem_spec
Breaker compatibility	K-frame KD/HKD/KDC/KDB; also KG enclosed/KP definite purpose 400 A, HKDDC 350 A	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.TA350K (General/Product specifications); oem_spec
Current rating	350 A max breaker	A	S184 p.12-113, Table 12-199; oem_spec

	400 A	A	S251 skuPage.TA350K (General/Product specifications); oem_spec
Kit contents	1 terminal (individually packed)	A	S184 p.12-113, Table 12-199; oem_spec
Wire range	250-500 kcmil (1) (120-240 mm2)	A	same as above
	250-500 kcmil Cu/Al	A	S251 skuPage.TA350K (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-113, Table 12-199; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA350K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.TA350K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.2 in, height 1.4 in, width 1.5 in, weight 0.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*2008 table gives TA350K max 350 A; 2015 KP/KG tables and KM reproduction give 400 A - which is current?*		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00692	**4212B77G01**	Series C K-frame panelboard connecting strap, outside pole, 3.50 in, 400 A	K-frame in panelboards (bus spacing per description) A	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-00691	**4212B78G02**	Series C K-frame panelboard connecting strap, center pole, 3.50 in, 400 A	K-frame in panelboards (bus spacing per description) A	discontinued (Eaton product page shows "Discontinued" banner

EDH-EAT-00692	4212B77G01	Eaton / Cutler-Hammer	connector-strap	DISCONTINUED (EATON PR

Series C K-frame panelboard connecting strap, outside pole, 3.50 in, 400 A

OEM part number	4212B77G01	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679161456	A	S251 alias; skuPage.4212B77G01 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 400 A	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G01, 400 A, Outside, Frame J-K, Series C	A	S251 skuPage.4212B77G01 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	K-frame in panelboards (bus spacing per description)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.4212B77G01 (General/Product specifications); oem_spec
Current rating	400 A	A	same as above
Kit contents	G01 (Eaton web 'Special features' attribute)	A	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.4212B77G01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.4 in, height 2.4 in, width 2.8 in, weight 2.35 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00691	4212B78G02	Eaton / Cutler-Hammer	connector-strap	DISCONTINUED (EATON PR

Series C K-frame panelboard connecting strap, center pole, 3.50 in, 400 A

OEM part number	4212B78G02	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679836064	A	S251 alias; skuPage.4212B78G02 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 400 A	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G02, 400 A, Center connection, Frame J-K, Series C	A	S251 skuPage.4212B78G02 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	K-frame in panelboards (bus spacing per description)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.4212B78G02 (General/Product specifications); oem_spec
Current rating	400 A	A	same as above
Kit contents	G02 (Eaton web 'Special features' attribute)	A	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.4212B78G02 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.7 in, height 2 in, width 3.1 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00703	**208B264H01**	Series C K-frame panelboard strap mounting bracket	K-frame A	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00703	208B264H01	Eaton / Cutler-Hammer	mounting-bracket	ACTIVE EATON PRODUCT P

Series C K-frame panelboard strap mounting bracket

OEM part number	208B264H01	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679831120	A	S251 alias; skuPage.208B264H01 (General/Product specifications); oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations)	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breakers electrical aftermarket accessory mounting bracket, Mounting bracket, Type JA, KA Breakers, Frame J-K	A	S251 skuPage.208B264H01 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	panelboard interior, supports breaker/strap	A	same as above
Breaker compatibility	K-frame	A	same as above
	Type JA,KA breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.208B264H01 (General/Product specifications); oem_spec

Breaker frame	Frame J-K	**A**	same as above
Poles	2,3	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
Kit contents	Used with type JA,KA breakers (Eaton web 'Special features' attribute)	**A**	S251 skuPage.208B264H01 (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	same as above
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.208B264H01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.4 in, height 0.7 in, width 1.5 in, weight 0.25 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00641	**TS33LD**	Series C K-frame terminal shield 3-pole, load	K-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00639	**TS33LN**	Series C K-frame terminal shield 2/3-pole, line	K-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00640	**TS34LN**	Series C K-frame terminal shield 4-pole, line	K-frame **A**	unknown

EDH-EAT-00641 **TS33LD** Eaton / Cutler-Hammer barrier **ACTIVE EATON PRODUCT P**

Series C K-frame terminal shield 3-pole, load

OEM part number	TS33LD	**A**	S184, S251 p.12-248, Tables 12-461..12-467; oem_spec
Alternate / superseded numbers	UPC 786679572054	**A**	S251 alias; skuPage.TS33LD (General/Product specifications); oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. K-frame terminal shield 3-pole, load	**A**	S184 p.12-248, Tables 12-461..12-467; oem_spec
	Eaton molded case circuit breaker accessory terminal, Load terminal shield, For type KD breakers, Frame J-K, Series C	**A**	S251 skuPage.TS33LD (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-248, Tables 12-461..12-467; oem_spec
Installation location	load end	**A**	same as above
Breaker compatibility	K-frame	**A**	same as above
	For type KD breakers (Eaton web 'Used with' attribute)	**A**	S251 skuPage.TS33LD (General/Product specifications); oem_spec
Breaker frame	Frame J-K	**A**	same as above
Poles	3	**A**	S184 p.12-248, Tables 12-461..12-467; oem_spec
Kit contents	package of 10	**A**	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.TS33LD (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.TS33LD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.3 in, height 5 in, width 4.3 in, weight 0.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		

Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00639	TS33LN	Eaton / Cutler-Hammer	barrier	ACTIVE EATON PRODUCT P

Series C K-frame terminal shield 2/3-pole, line

OEM part number	TS33LN	A	S184, S251 p.12-248, Tables 12-461..12-467; oem_spec
Alternate / superseded numbers	UPC 786679504321	A	S251 alias; skuPage.TS33LN (General/Product specifications); oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. K-frame terminal shield 2/3-pole, line	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
	Eaton molded case circuit breaker accessory terminal, K-Frame terminal shield, Two-pole, three-pole, Q3, Frame J-K	A	S251 skuPage.TS33LN (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Installation location	line terminal area	A	same as above
Breaker compatibility	K-frame	A	same as above
Breaker frame	Frame J-K; Mounting Method; Line	A	S251 skuPage.TS33LN (General/Product specifications); oem_spec
Poles	2,3	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
	Two-pole; Three-pole (Eaton web: Two-pole; Three-pole)	A	S251 skuPage.TS33LN (General/Product specifications); oem_spec
Kit contents	package of 10	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TS33LN (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.TS33LN (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 0.1 in, width 3.7 in, weight 0.06 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00640	TS34LN	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C K-frame terminal shield 4-pole, line

OEM part number	TS34LN	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. K-frame terminal shield 4-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	K-frame	A	same as above
Poles	4	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00611	**KPR3A**	Series C K-frame keeper nut (.375-16, line end)	K-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00613	**KPR3AM**	Series C K-frame keeper nut (M8, line end)	K-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00612	**KPR3B**	Series C K-frame keeper nut (.375-16, load end)	K-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00614	**KPR3BM**	Series C K-frame keeper nut (M8, load end)	K-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00611 KPR3A — Eaton / Cutler-Hammer — fastener — ACTIVE EATON PRODUCT P

Series C K-frame keeper nut (.375-16, line end)

OEM part number	KPR3A	**A**	S184, S251 p.12-243, Table 12-449; oem_spec
Alternate / superseded numbers	UPC 786679265703	**A**	S251 alias; skuPage.KPR3A (General/Product specifications); oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	**A**	S184 p.12-243, Table 12-449; oem_spec
	Eaton molded case circuit breaker accessory termination hardware, Imperial keeper nut, Frame K, Series C, Line, 0.375-16	**A**	S251 skuPage.KPR3A (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-243, Table 12-449; oem_spec
Installation location	line conductor	**A**	same as above
Breaker compatibility	K-frame	**A**	same as above
Breaker frame	Frame K	**A**	S251 skuPage.KPR3A (General/Product specifications); oem_spec
Kit contents	package of 3	**A**	S184 p.12-243, Table 12-449; oem_spec
Fasteners	thread .375-16	**A**	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.KPR3A (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.KPR3A (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4.5 in, height 1.2 in, width 1.4 in, weight 0.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*KM reseller page says K-frame keeper nuts are packages of 12; 2008 OEM table says package of 3.*		

EDH-EAT-00613 KPR3AM — Eaton / Cutler-Hammer — fastener — ACTIVE EATON PRODUCT P

Series C K-frame keeper nut (M8, line end)

OEM part number	KPR3AM	**A**	S184, S251 p.12-243, Table 12-449; oem_spec
Alternate / superseded numbers	UPC 786679265710	**A**	S251 alias; skuPage.KPR3AM (General/Product specifications); oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	**A**	S184 p.12-243, Table 12-449; oem_spec

	Eaton molded case circuit breaker accessory termination hardware, Metric keeper nut, Frame J-K, Series C, Line, M-8	A	S251 skuPage.KPR3AM (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-449; oem_spec
Installation location	line conductor	A	same as above
Breaker compatibility	K-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.KPR3AM (General/Product specifications); oem_spec
Kit contents	package of 3	A	S184 p.12-243, Table 12-449; oem_spec
Fasteners	thread M8	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPR3AM (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.KPR3AM (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4.3 in, height 0.9 in, width 1.5 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*KM reseller page says K-frame keeper nuts are packages of 12; 2008 OEM table says package of 3.*		

EDH-EAT-00612	KPR3B	Eaton / Cutler-Hammer	fastener	ACTIVE EATON PRODUCT P

Series C K-frame keeper nut (.375-16, load end)

OEM part number	KPR3B	A	S184, S251 p.12-243, Table 12-449; oem_spec
Alternate / superseded numbers	UPC 786679265727	A	S251 alias; skuPage.KPR3B (General/Product specifications); oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	S184 p.12-243, Table 12-449; oem_spec
	Eaton molded case circuit breaker accessory termination hardware, Imperial keeper nut, Frame J-K, Series C, Load, 0.375-16	A	S251 skuPage.KPR3B (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-449; oem_spec
Installation location	load conductor	A	same as above
Breaker compatibility	K-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.KPR3B (General/Product specifications); oem_spec
Kit contents	package of 3	A	S184 p.12-243, Table 12-449; oem_spec
Fasteners	thread .375-16	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPR3B (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.KPR3B (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3 in, height 1.2 in, width 1.2 in, weight 0.35 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		

Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*KM reseller page says K-frame keeper nuts are packages of 12; 2008 OEM table says package of 3.*		

EDH-EAT-00614	KPR3BM	Eaton / Cutler-Hammer	fastener	ACTIVE EATON PRODUCT P

Series C K-frame keeper nut (M8, load end)

OEM part number	KPR3BM	**A**	S184, S251 p.12-243, Table 12-449; oem_spec
Alternate / superseded numbers	UPC 786679265734	**A**	S251 alias; skuPage.KPR3BM (General/Product specifications); oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	**A**	S184 p.12-243, Table 12-449; oem_spec
	Eaton molded case circuit breaker accessory termination hardware, Eaton molded case circuit breaker accessory termination hardware, Metric keeper nut, Frame J-K, Load, M-8	**A**	S251 skuPage.KPR3BM (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-243, Table 12-449; oem_spec
Installation location	load conductor	**A**	same as above
Breaker compatibility	K-frame	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.KPR3BM (General/Product specifications); oem_spec
Kit contents	package of 3	**A**	S184 p.12-243, Table 12-449; oem_spec
Fasteners	thread M8	**A**	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.KPR3BM (General/Product specifications); oem_spec
Listing / approvals	UL Listed	**A**	S251 skuPage.KPR3BM (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 1 in, width 1 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*KM reseller page says K-frame keeper nuts are packages of 12; 2008 OEM table says package of 3.*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00658	**6642C14G02**	Series C K-frame rear connecting stud, 400 A short stud, panel .75-1 in	K-frame fixed-mounted **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00661	**6642C14G03**	Series C K-frame rear connecting stud, 400 A long stud, panel .75-1 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00659	**6642C14G04**	Series C K-frame rear connecting stud, 400 A short stud, panel .50-.75 in	K-frame fixed-mounted **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00662	**6642C14G05**	Series C K-frame rear connecting stud, 400 A long stud, panel .50-.75 in	K-frame fixed-mounted **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00660	**6642C14G06**	Series C K-frame rear connecting stud, 400 A short stud, panel .25-.5 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00663	**6642C14G07**	Series C K-frame rear connecting stud, 400 A long stud, panel .25-.5 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00601	**KPEK3**	Series C K-frame end cap kit, 3-pole, .312-18	K-frame 3-pole **A**	Active Eaton product page (no Discontinued banner), accessed

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00603	**KPEK34**	Series C K-frame end cap kit, 4-pole, .312-18	K-frame 4-pole **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00602	**KPEKM3**	Series C K-frame end cap kit, 3-pole, M8	K-frame 3-pole **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00604	**KPEKM34**	Series C K-frame end cap kit, 4-pole, M8	K-frame 4-pole **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00658	6642C14G02	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C K-frame rear connecting stud, 400 A short stud, panel .75-1 in

OEM part number	6642C14G02	**A**	S184, S251 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Alternate / superseded numbers	UPC 786679730706	**A**	S251 alias; skuPage.6642C14G02 (General/Product specifications); oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A short stud, panel .75-1 in; tube 313C909H17	**A**	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	Eaton molded case circuit breaker accessory stud, Short rear connecting stud, G02, 400 A, For type K-frame breakers, Frame K, Series C, 0.84 in	**A**	S251 skuPage.6642C14G02 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Installation location	line/load terminal, through mounting panel (rear connection)	**A**	same as above
Breaker compatibility	K-frame fixed-mounted	**A**	same as above
	For type K-frame breakers (Eaton web 'Used with' attribute)	**A**	S251 skuPage.6642C14G02 (General/Product specifications); oem_spec
Breaker frame	Frame K	**A**	same as above
Current rating	400 A	**A**	same as above
Kit contents	stud only; tube(s) 313C909H17 ordered separately by panel thickness	**A**	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	G02 (Eaton web 'Special features' attribute)	**A**	S251 skuPage.6642C14G02 (General/Product specifications); oem_spec
Fasteners	.75-16 thread	**A**	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.6642C14G02 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.6642C14G02 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.2 in, height 1.7 in, width 2 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00661	6642C14G03	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame rear connecting stud, 400 A long stud, panel .75-1 in

OEM part number	6642C14G03	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A long stud, panel .75-1 in; tube 313C909H20	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 313C909H20 ordered separately by panel thickness	A	same as above
Fasteners	.75-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00659	6642C14G04	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C K-frame rear connecting stud, 400 A short stud, panel .50-.75 in

OEM part number	6642C14G04	A	S184, S251 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Alternate / superseded numbers	UPC 786679161517	A	S251 alias; skuPage.6642C14G04 (General/Product specifications); oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A short stud, panel .50-.75 in; tube 313C909H18	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	Eaton molded case circuit breaker accessory stud, Short rear connecting stud, G04, 400 A, For type K-frame breakers, Frame J-K, Series C, 1.09 in	A	S251 skuPage.6642C14G04 (General/Product specifications); oem_spec
Application	accessory	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
	For type K-frame breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.6642C14G04 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	400 A	A	same as above
Kit contents	stud only; tube(s) 313C909H18 ordered separately by panel thickness	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	G04 (Eaton web 'Special features' attribute)	A	S251 skuPage.6642C14G04 (General/Product specifications); oem_spec
Fasteners	.75-16	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.6642C14G04 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.6642C14G04 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.5 in, height 2.2 in, width 2.2 in, weight 1.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00662	6642C14G05	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C K-frame rear connecting stud, 400 A long stud, panel .50-.75 in

OEM part number	6642C14G05	A	S184, S251 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Alternate / superseded numbers	UPC 786679161524	A	S251 alias; skuPage.6642C14G05 (General/Product specifications); oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A long stud, panel .50-.75 in; tube 313C909H21	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	Eaton molded case circuit breaker accessory stud, Long rear connecting stud, G05, 400 A, For type K-frame breakers, Frame J-K, Series C, 4.03 in	A	S251 skuPage.6642C14G05 (General/Product specifications); oem_spec
Application	accessory	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
	For type K-frame breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.6642C14G05 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	400 A	A	same as above
Kit contents	stud only; tube(s) 313C909H21 ordered separately by panel thickness	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
	G05 (Eaton web 'Special features' attribute)	A	S251 skuPage.6642C14G05 (General/Product specifications); oem_spec
Fasteners	.75-16	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.6642C14G05 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.6642C14G05 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 9.2 in, height 2 in, width 2 in, weight 1.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00660 **6642C14G06** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C K-frame rear connecting stud, 400 A short stud, panel .25-.5 in

OEM part number	6642C14G06	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A short stud, panel .25-.5 in; tube 313C909H19	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 313C909H19 ordered separately by panel thickness	A	same as above
Fasteners	.75-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00663	6642C14G07	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame rear connecting stud, 400 A long stud, panel .25-.5 in

OEM part number	6642C14G07	A	S184 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A long stud, panel .25-.5 in; tube 313C909H22	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 313C909H22 ordered separately by panel thickness	A	same as above
Fasteners	.75-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00601	KPEK3	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C K-frame end cap kit, 3-pole, .312-18

OEM part number	KPEK3	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 786679045312	A	S251 alias; skuPage.KPEK3 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Accessories and terminals, Imperial end cap kit, Frame J-K, Series C, 0.312-18 Thread	A	S251 skuPage.KPEK3 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	K-frame 3-pole	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.KPEK3 (General/Product specifications); oem_spec
Poles	3	A	S184 p.12-243, Table 12-447; oem_spec
Fasteners	thread .312-18	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEK3 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.KPEK3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.5 in, height 2.1 in, width 2.7 in, weight 0.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00603	KPEK34	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C K-frame end cap kit, 4-pole, .312-18

OEM part number	KPEK34	**A**	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 786679107720	**A**	S251 alias; skuPage.KPEK34 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	**A**	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Accessories and terminals, Imperial end cap kit, Four-pole, Frame K, Series C, 0.312-18 Thread	**A**	S251 skuPage.KPEK34 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	**A**	same as above
Breaker compatibility	K-frame 4-pole	**A**	same as above
Breaker frame	Frame K	**A**	S251 skuPage.KPEK34 (General/Product specifications); oem_spec
Poles	4	**A**	S184, S251 p.12-243, Table 12-447; oem_spec
Fasteners	thread .312-18	**A**	S184 p.12-243, Table 12-447; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.KPEK34 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.KPEK34 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.5 in, height 2.1 in, width 2.7 in, weight 0.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00602	KPEKM3	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C K-frame end cap kit, 3-pole, M8

OEM part number	KPEKM3	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 786679045299	A	S251 alias; skuPage.KPEKM3 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Metric end cap kit, Three-pole, Frame J-K, M-8	A	S251 skuPage.KPEKM3 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	K-frame 3-pole	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.KPEKM3 (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-243, Table 12-447; oem_spec
Fasteners	thread M8	A	S184 p.12-243, Table 12-447; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEKM3 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.KPEKM3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.5 in, height 2.1 in, width 2.7 in, weight 0.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00604	KPEKM34	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C K-frame end cap kit, 4-pole, M8

OEM part number	KPEKM34	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 786679107713	A	S251 alias; skuPage.KPEKM34 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, End cap kit	A	S251 skuPage.KPEKM34 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	K-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread M8	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEKM34 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.KPEKM34 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 1 in, width 1 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker family Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01333	**BMH3**	Eaton base mounting hardware, K-frame	—	unknown

EDH-EAT-01333	BMH3	Cutler-Hammer	fastener	STATUS UNKNOWN

Eaton base mounting hardware, K-frame

OEM part number	BMH3	A	S184 p. 12-254, Tables 12-457/12-458 Base Mounting Hardware (surface mounting; supplied only on request); oem_spec
Description	Base (surface) mounting hardware: K-frame .250-20 x 1.5 in pan-head screws and lockwashers.	A	same as above
Application	accessory	A	same as above
Cross-links	Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface-mounting hardware for individual/enclosed mounting; confirm whether used for panelboard (PRL3a/PRL4) breaker mounting.*		

Breaker family Series C L-Frame (LD/HLD/LDC/LDB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00500	**2TA401LDK**	Series C L-frame line/load terminal kit, 400 A, Cu/Al	L-frame LD/HLD/LDC/LDB A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00505	**2TA603LDK**	Series C L-frame line/load terminal kit, 600 A, Cu/Al	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case s A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00510	**2TA603LDKCW**	Series C L-frame terminal with control wire termination (2TA603LDK)	L-frame LD/HLD/LDC A	unknown
EDH-EAT-00501	**3TA401LDK**	Series C L-frame line/load terminal kit, 400 A, Cu/Al	L-frame LD/HLD/LDC/LDB A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00506	**3TA603LDK**	Series C L-frame line/load terminal kit, 600 A, Cu/Al	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case s A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00511	**3TA603LDKCW**	Series C L-frame terminal with control wire termination (3TA603LDK)	L-frame LD/HLD/LDC A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00502	**4TA401LDK**	Series C L-frame line/load terminal kit, 400 A, Cu/Al	L-frame LD/HLD/LDC/LDB A	unknown
EDH-EAT-00507	**4TA603LDK**	Series C L-frame line/load terminal kit, 600 A, Cu/Al	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case s A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00512	**4TA603LDKCW**	Series C L-frame terminal with control wire termination (4TA603LDK)	L-frame LD/HLD/LDC A	unknown
EDH-EAT-00508	**T602LD**	Series C L-frame line/load terminal, 600 A, Cu	L-frame LD/HLD/LDC/LDB A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00513	**T602LDCW**	Series C L-frame terminal with control wire termination (T602LD)	L-frame LD/HLD/LDC A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00503	**TA450LD**	Series C L-frame line/load terminal, 450 A, Cu/Al	L-frame LD/HLD/LDC/LDB A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00504	**TA602LD**	Series C L-frame line/load terminal, 500 A, Cu/Al	L-frame LD/HLD/LDC/LDB; standard on 300-500 A LD/HLD/LDC; HLDDC; LP de A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00509	**TA602LDCW**	Series C L-frame terminal with control wire termination (TA602LD)	L-frame LD/HLD/LDC A	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00500 **2TA401LDK** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C L-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	2TA401LDK	A	S184, S251 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	UPC 786679558966	A	S251 alias; skuPage.2TA401LDK (General/Product specifications); oem_spec
	TA401LD (Figure caption names single 'TA401LD' terminal)	D	S186 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
	Eaton molded case circuit breaker accessory terminal, Two-pole line and load terminal kit, 400 A, #4/0 AWG-600 kcmil Cu/Al, Frame J-K	A	S251 skuPage.2TA401LDK (General/Product specifications); oem_spec

Application	accessory	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.2TA401LDK (General/Product specifications); oem_spec
Poles	2	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Current rating	400 A max breaker	A	same as above
	400 A	A	S251 skuPage.2TA401LDK (General/Product specifications); oem_spec
Kit contents	2-pole kit: one terminal per pole + one terminal cover	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Wire range	4/0-600 kcmil (1) (120-300 mm2)	A	same as above
	#4/0 AWG-600 kcmil Cu/Al	A	S251 skuPage.2TA401LDK (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.2TA401LDK (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.2TA401LDK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 1 in, width 1 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00505 **2TA603LDK** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C L-frame line/load terminal kit, 600 A, Cu/Al

OEM part number	2TA603LDK	A	S184, S251 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	UPC 786679801871	A	S251 alias; skuPage.2TA603LDK (General/Product specifications); oem_spec
	TA603LD (Figure caption names single 'TA401LD or TA603LD' step-type terminal; relation to kit unverified)	D	S186 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
	Eaton molded case circuit breaker accessory terminal, Two-pole line and load terminal kit, 600 A, 400-500 kcmil Cu/Al, Frame J-K, Series C	A	S251 skuPage.2TA603LDK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Breaker compatibility	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case switches LD/LDB/HLD 600WK	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.2TA603LDK (General/Product specifications); oem_spec

Poles	2	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Current rating	600 A max breaker	A	same as above
	600 A	A	S251 skuPage.2TA603LDK (General/Product specifications); oem_spec
Kit contents	2-pole kit + one terminal cover	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Wire range	400-500 kcmil (2) (185-240 mm2)	A	same as above
	400-500 kcmil Cu/Al	A	S251 skuPage.2TA603LDK (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.2TA603LDK (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.2TA603LDK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 11.2 in, height 2.2 in, width 4.2 in, weight 1.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00510 **2TA603LDKCW** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series C L-frame terminal with control wire termination (2TA603LDK)

OEM part number	2TA603LDKCW	A	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Description	Same as 2TA603LDK with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Poles	2	A	same as above
Kit contents	2-pole kit + one terminal cover	A	same as above
Wire range	400-500 kcmil (2) (185-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00501 **3TA401LDK** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C L-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA401LDK	A	S184, S251 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	UPC 786679558980	A	S251 alias; skuPage.3TA401LDK (General/Product specifications); oem_spec
	TA401LD (Figure caption names single 'TA401LD' terminal)	D	S186 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec

	Eaton molded case circuit breaker accessory line and load terminal, Three-pole line and load terminal kit, 400 A, #4/0 AWG-600 kcmil Cu/Al, Frame L, Series C	A	S251 skuPage.3TA401LDK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Breaker frame	Frame L	A	S251 skuPage.3TA401LDK (General/Product specifications); oem_spec
Poles	3	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Current rating	400 A max breaker	A	same as above
	400 A	A	S251 skuPage.3TA401LDK (General/Product specifications); oem_spec
Kit contents	3-pole kit: one terminal per pole + one terminal cover	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Wire range	4/0-600 kcmil (1) (120-300 mm2)	A	same as above
	#4/0 AWG-600 kcmil Cu/Al	A	S251 skuPage.3TA401LDK (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA401LDK (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3TA401LDK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 11.2 in, height 2.2 in, width 4.2 in, weight 1.65 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00506 **3TA603LDK** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C L-frame line/load terminal kit, 600 A, Cu/Al

OEM part number	3TA603LDK	A	S184, S251 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	UPC 786679801888	A	S251 alias; skuPage.3TA603LDK (General/Product specifications); oem_spec
	TA603LD (Figure caption names single 'TA401LD or TA603LD' step-type terminal; relation to kit unverified)	D	S186 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Three-pole line and load terminal kit, 600 A, 400-500 kcmil Cu/Al, Frame J-K, Series C	A	S251 skuPage.3TA603LDK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Breaker compatibility	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case switches LD/LDB/HLD 600WK	A	same as above

Breaker frame	Frame J-K	A	S251 skuPage.3TA603LDK (General/Product specifications); oem_spec
Poles	3	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Current rating	600 A max breaker	A	same as above
	600 A	A	S251 skuPage.3TA603LDK (General/Product specifications); oem_spec
Kit contents	3-pole kit + one terminal cover	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Wire range	400-500 kcmil (2) (185-240 mm2)	A	same as above
	400-500 kcmil Cu/Al	A	S251 skuPage.3TA603LDK (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA603LDK (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3TA603LDK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 11.1 in, height 2.2 in, width 4.3 in, weight 1.45 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00511 **3TA603LDKCW** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C L-frame terminal with control wire termination (3TA603LDK)

OEM part number	3TA603LDKCW	A	S184, S251 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Alternate / superseded numbers	UPC 786679162477	A	S251 alias; skuPage.3TA603LDKCW (General/Product specifications); oem_spec
Description	Same as 3TA603LDK with control wire termination	A	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal with control wire termination, 600 A, Three-pole, 400-500 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	A	S251 skuPage.3TA603LDKCW (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA603LDKCW (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Current rating	600 A	A	S251 skuPage.3TA603LDKCW (General/Product specifications); oem_spec

Kit contents	3-pole kit + one terminal cover	A	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Wire range	400-500 kcmil (2) (185-240 mm2)	A	same as above
	400-500 kcmil Cu/Al	A	S251 skuPage.3TA603LDKCW (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA603LDKCW (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.3TA603LDKCW (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 9.1 in, height 3.7 in, width 6 in, weight 1.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00502 — 4TA401LDK — Eaton / Cutler-Hammer — lug-kit — STATUS UNKNOWN

Series C L-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA401LDK	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA401LD (Figure caption names single 'TA401LD' terminal)	D	S186 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit: one terminal per pole + one terminal cover	A	same as above
Wire range	4/0-600 kcmil (1) (120-300 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00507 — 4TA603LDK — Eaton / Cutler-Hammer — lug-kit — ACTIVE EATON PRODUCT P

Series C L-frame line/load terminal kit, 600 A, Cu/Al

OEM part number	4TA603LDK	A	S184, S251 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	UPC 786679559123	A	S251 alias; skuPage.4TA603LDK (General/Product specifications); oem_spec
	TA603LD (Figure caption names single 'TA401LD or TA603LD' step-type terminal; relation to kit unverified)	D	S186 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Standard terminal, 600 A, 400-500 kcmil Cu/Al, For type LD breakers, Frame J-K	A	S251 skuPage.4TA603LDK (General/Product specifications); oem_spec

Application	accessory	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Breaker compatibility	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case switches LD/LDB/HLD 600WK	A	same as above
	For type LD breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.4TA603LDK (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Poles	4	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Current rating	600 A max breaker	A	same as above
	600 A	A	S251 skuPage.4TA603LDK (General/Product specifications); oem_spec
Kit contents	4-pole kit + one terminal cover	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Wire range	400-500 kcmil (2) (185-240 mm2)	A	same as above
	400-500 kcmil Cu/Al	A	S251 skuPage.4TA603LDK (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.4TA603LDK (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.4TA603LDK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 1 in, width 1 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00512 — 4TA603LDKCW — Eaton / Cutler-Hammer — lug-kit — STATUS UNKNOWN

Series C L-frame terminal with control wire termination (4TA603LDK)

OEM part number	4TA603LDKCW	A	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Description	Same as 4TA603LDK with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Poles	4	A	same as above
Kit contents	4-pole kit + one terminal cover	A	same as above
Wire range	400-500 kcmil (2) (185-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00508 — T602LD — Eaton / Cutler-Hammer — lug-kit — ACTIVE EATON PRODUCT P

Series C L-frame line/load terminal, 600 A, Cu

OEM part number	T602LD	A	S184, S251 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec

Alternate / superseded numbers	UPC 786679852057	A	S251 alias; skuPage.T602LD (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
	Eaton molded case circuit breaker accessory terminal, Optional Al/Cu pressure terminals, 600 A, (2) 250-350 kcmil, Frame J-K, Series C, Line and load	A	S251 skuPage.T602LD (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.T602LD (General/Product specifications); oem_spec
Current rating	600 A max breaker	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
	600 A	A	S251 skuPage.T602LD (General/Product specifications); oem_spec
Kit contents	1 terminal (individually packed)	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Wire range	250-350 kcmil (2) (120-250 mm2)	A	same as above
	(2) 250-350 kcmil	A	S251 skuPage.T602LD (General/Product specifications); oem_spec
Material	terminal body copper	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.T602LD (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.T602LD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.5 in, height 1.7 in, width 2 in, weight 0.7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00513 **T602LDCW** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C L-frame terminal with control wire termination (T602LD)

OEM part number	T602LDCW	A	S184, S251 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Alternate / superseded numbers	UPC 786679162453	A	S251 alias; skuPage.T602LDCW (General/Product specifications); oem_spec
Description	Same as T602LD with control wire termination	A	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal with control wire termination, 600 A, 250-350 kcmil Cu, Frame J-K, Series G, Pressure type	A	S251 skuPage.T602LDCW (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec

Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.T602LDCW (General/Product specifications); oem_spec
Current rating	600 A	A	same as above
Kit contents	1 terminal (individually packed)	A	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Wire range	250-350 kcmil (2) (120-250 mm2)	A	same as above
	250-350 kcmil Cu	A	S251 skuPage.T602LDCW (General/Product specifications); oem_spec
Material	terminal body copper	A	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.T602LDCW (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.T602LDCW (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3 in, height 2 in, width 2 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Table 12-455 lists T602LDCW range as (2) 250-350 kcmil Cu 120-150 mm2 and TA602LDCW as (2) 3/0-350 kcmil; KM page notes TA602LDCW 'not for use with T250KB terminals' - verify.*		

EDH-EAT-00503 TA450LD Eaton / Cutler-Hammer lug-kit ACTIVE EATON PRODUCT P

Series C L-frame line/load terminal, 450 A, Cu/Al

OEM part number	TA450LD	A	S184, S251 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	UPC 786679423530	A	S251 alias; skuPage.TA450LD (General/Product specifications); oem_spec
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
	Eaton molded case circuit breaker accessory terminal, One terminal and one cover per pole kit, 450 A, #4-4/0 AWG Cu/Al, Frame J-K, Series C	A	S251 skuPage.TA450LD (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.TA450LD (General/Product specifications); oem_spec
Current rating	450 A max breaker	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
	450 A	A	S251 skuPage.TA450LD (General/Product specifications); oem_spec
Kit contents	1 terminal (individually packed)	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Wire range	4-4/0 AWG (2) (25-95 mm2)	A	same as above

	#4-4/0 AWG Cu/Al	A	S251 skuPage.TA450LD (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA450LD (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.TA450LD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1.5 in, height 2 in, width 2 in, weight 0.27 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00504	TA602LD	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C L-frame line/load terminal, 500 A, Cu/Al

OEM part number	TA602LD	A	S184, S251 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	UPC 786679852064	A	S251 alias; skuPage.TA602LD (General/Product specifications); oem_spec
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
	Eaton molded case circuit breaker accessory terminal, One terminal and one cover per pole kit, 500 A, #3/0 AWG-350 kcmil Cu/Al, Frame J-K, Series C	A	S251 skuPage.TA602LD (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Breaker compatibility	L-frame LD/HLD/LDC/LDB; standard on 300-500 A LD/HLD/LDC; HLDDC; LP definite purpose 500 A	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.TA602LD (General/Product specifications); oem_spec
Current rating	500 A max breaker	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
	500 A	A	S251 skuPage.TA602LD (General/Product specifications); oem_spec
Kit contents	1 terminal (individually packed)	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Wire range	3/0-350 kcmil (2) (95-150 mm2)	A	same as above
	#3/0 AWG-350 kcmil Cu/Al	A	S251 skuPage.TA602LD (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA602LD (General/Product specifications); oem_spec

Listing / approvals	UL Listed	**A**	S251 skuPage.TA602LD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.5 in, height 1.7 in, width 1.9 in, weight 0.25 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00509	**TA602LDCW**	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C L-frame terminal with control wire termination (TA602LD)

OEM part number	TA602LDCW	**A**	S184, S251 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Alternate / superseded numbers	UPC 786679162446	**A**	S251 alias; skuPage.TA602LDCW (General/Product specifications); oem_spec
Description	Same as TA602LD with control wire termination	**A**	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal with control wire termination, 500 A, #3/0 AWG-350 kcmil Cu/Al, Frame J-K, Series C, Pressure type line and load	**A**	S251 skuPage.TA602LDCW (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Breaker compatibility	L-frame LD/HLD/LDC	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.TA602LDCW (General/Product specifications); oem_spec
Current rating	500 A	**A**	same as above
Kit contents	1 terminal (individually packed)	**A**	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Wire range	3/0-350 kcmil (2) (95-150 mm2)	**A**	same as above
	#3/0 AWG-350 kcmil Cu/Al	**A**	S251 skuPage.TA602LDCW (General/Product specifications); oem_spec
Material	terminal body aluminum	**A**	S184 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.TA602LDCW (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.TA602LDCW (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.6 in, height 1.8 in, width 1.8 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Table 12-455 lists T602LDCW range as (2) 250-350 kcmil Cu 120-150 mm2 and TA602LDCW as (2) 3/0-350 kcmil; KM page notes TA602LDCW 'not for use with T250KB terminals' - verify.*		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00694	**506C052G01**	Series C L-frame panelboard connecting strap, outside pole, 600 A	L-frame in panelboards (bus spacing per description) **A**	discontinued (Eaton product page shows "Discontinued" banner

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00693	**624B609G01**	Series C L-frame panelboard connecting strap, center pole, 600 A	L-frame in panelboards (bus spacing per description) **A**	discontinued (Eaton product page shows "Discontinued" banner

EDH-EAT-00694	506C052G01	Eaton / Cutler-Hammer	connector-strap	DISCONTINUED (EATON PR

Series C L-frame panelboard connecting strap, outside pole, 600 A

OEM part number	506C052G01	**A**	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679838761	**A**	S251 alias; skuPage.506C052G01 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 600 A	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G01, 600 A, Outside, Frame J-K, Series C	**A**	S251 skuPage.506C052G01 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	**A**	same as above
Breaker compatibility	L-frame in panelboards (bus spacing per description)	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.506C052G01 (General/Product specifications); oem_spec
Current rating	600 A	**A**	same as above
Kit contents	G01 (Eaton web 'Special features' attribute)	**A**	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	**A**	same as above
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.506C052G01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.7 in, height 2.5 in, width 3 in, weight 2.45 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00693	624B609G01	Eaton / Cutler-Hammer	connector-strap	DISCONTINUED (EATON PR

Series C L-frame panelboard connecting strap, center pole, 600 A

OEM part number	624B609G01	**A**	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679973189	**A**	S251 alias; skuPage.624B609G01 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 600 A	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory base mounting hardware, Panelboard connecting straps, G01, 600 A, Center connection, Frame J-K, Series C	**A**	S251 skuPage.624B609G01 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	**A**	same as above
Breaker compatibility	L-frame in panelboards (bus spacing per description)	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.624B609G01 (General/Product specifications); oem_spec
Current rating	600 A	**A**	same as above
Kit contents	G01 (Eaton web 'Special features' attribute)	**A**	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	**A**	same as above
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.624B609G01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 10.7 in, height 3.7 in, width 4.6 in, weight 2.4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00704	**208B297H01**	Series C L-frame panelboard strap mounting bracket	L-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00704	208B297H01	Eaton / Cutler-Hammer	mounting-bracket	ACTIVE EATON PRODUCT P

Series C L-frame panelboard strap mounting bracket

OEM part number	208B297H01	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679831144	A	S251 alias; skuPage.208B297H01 (General/Product specifications); oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations)	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breakers electrical aftermarket accessory mounting bracket, Mounting bracket, For type JK, JKL, LA, LAB breakers	A	S251 skuPage.208B297H01 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	panelboard interior, supports breaker/strap	A	same as above
Breaker compatibility	L-frame	A	same as above
	For type JK,JKL,LA,LAB breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.208B297H01 (General/Product specifications); oem_spec
Poles	2,3	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.208B297H01 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.208B297H01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4 in, height 2 in, width 2 in, weight 4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00642	**314C420G05**	Series C L-frame terminal shield	L-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00649	**IPB4**	Series C interphase barrier (L, M)	L, M (2008); KM reproduction: M only **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00642	314C420G05	Eaton / Cutler-Hammer	barrier	ACTIVE EATON PRODUCT P

Series C L-frame terminal shield

OEM part number	314C420G05	A	S184, S251 p.12-248, Tables 12-461..12-467; oem_spec
Alternate / superseded numbers	UPC 786679971116	A	S251 alias; skuPage.314C420G05 (General/Product specifications); oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. L-frame terminal shield	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
	Eaton molded case circuit breaker accessory terminal shield, Terminal shield, Type LA two-pole, three-pole breakers, Frame J-K, Series G	A	S251 skuPage.314C420G05 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Installation location	terminal area	A	same as above

Breaker compatibility	L-frame	A	same as above
	Type LA two-pole, three-pole breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.314C420G05 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Kit contents	package of 1	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
	Used with type LA two-pole, three-pole breakers (Eaton web 'Special features' attribute)	A	S251 skuPage.314C420G05 (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.314C420G05 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4 in, height 6 in, width 9.5 in, weight 1.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00649	IPB4	Eaton / Cutler-Hammer	barrier	ACTIVE EATON PRODUCT P

Series C interphase barrier (L, M)

OEM part number	IPB4	A	S184, S251 p.12-249, Table 12-469; oem_spec
Alternate / superseded numbers	UPC 786679255100	A	S251 alias; skuPage.IPB4 (General/Product specifications); oem_spec
Description	Interphase barriers: high-dielectric insulating plates installed in molded slots between terminals for added clearance; field installation only; two per package (Conflicting assignments)	A	S184 p.12-249, Table 12-469; oem_spec
	Eaton molded case circuit breaker accessory interphase barrier, Interphase barriers, External, Q13, Frame J-K, Series C	A	S251 skuPage.IPB4 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-249, Table 12-469; oem_spec
Breaker compatibility	L, M (2008); KM reproduction: M only	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.IPB4 (General/Product specifications); oem_spec
Kit contents	2 per package	A	S184 p.12-249, Table 12-469; oem_spec
	External (Eaton web 'Special features' attribute)	A	S251 skuPage.IPB4 (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.IPB4 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 0.05 in, width 5.5 in, weight 0.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB), Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Is IPB4 L+M or M only (newer edition)?*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00664	**314C960G07**	Series C L/M-frame rear connecting stud (L: stud length 5.47 in)	L/M-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00665	**314C960G08**	Series C L/M-frame rear connecting stud (L: 7.97 in)	L/M-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00666	**314C960G09**	Series C L/M-frame rear connecting stud (L: 10.47 in)	L/M-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00605	**KPEK4**	Series C L-frame end cap kit, 3-pole, .312-18	L-frame 3-pole **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00607	**KPEK44**	Series C L-frame end cap kit, 4-pole, .312-18	L-frame 4-pole **A**	unknown
EDH-EAT-00606	**KPEKM4**	Series C L-frame end cap kit, 3-pole, M8	L-frame 3-pole **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00608	**KPEKM44**	Series C L-frame end cap kit, 4-pole, M8	L-frame 4-pole **A**	unknown

EDH-EAT-00664 — 314C960G07 — Eaton / Cutler-Hammer — breaker-accessory — ACTIVE EATON PRODUCT P

Series C L/M-frame rear connecting stud (L: stud length 5.47 in)

OEM part number	314C960G07	**A**	S184, S251 p.12-260, Tables 12-508..12-510; oem_spec
Alternate / superseded numbers	UPC 786679508909	**A**	S251 alias; skuPage.314C960G07 (General/Product specifications); oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. L: stud length 5.47 in; M: 600 A	**A**	S184 p.12-260, Tables 12-508..12-510; oem_spec
	Eaton molded case circuit breaker accessory rear connected studs, Rear connected studs, G07, 600 A, Frame J-K, Series C, 5.91 in Back of breaker	**A**	S251 skuPage.314C960G07 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-260, Tables 12-508..12-510; oem_spec
Installation location	rear connection, line/load	**A**	same as above
Breaker compatibility	L/M-frame	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.314C960G07 (General/Product specifications); oem_spec
Current rating	600 A	**A**	same as above
Kit contents	G07 (Eaton web 'Special features' attribute)	**A**	same as above
Dimensions	length / back-of-breaker dimension 5.47 in (L) / 5.91 in back of breaker (M)	**A**	S184 p.12-260; oem_spec
Fasteners	thread 1.00-12 (M 600 A)	**A**	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.314C960G07 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.314C960G07 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.5 in, height 2.5 in, width 2.5 in, weight 2.15 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB), Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Torque values		
Open question	*Same style number listed in L-frame (by stud length) and M-frame 600 A tables - confirm identical part.*		

EDH-EAT-00665 — 314C960G08 — Eaton / Cutler-Hammer — breaker-accessory — ACTIVE EATON PRODUCT P

Series C L/M-frame rear connecting stud (L: 7.97 in)

OEM part number	314C960G08	**A**	S184, S251 p.12-260, Tables 12-508..12-510; oem_spec

Alternate / superseded numbers	UPC 786679508916	A	S251 alias; skuPage.314C960G08 (General/Product specifications); oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. L: 7.97 in; M: 600 A	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
	Eaton molded case circuit breaker accessory rear connected studs, Rear connected studs, G08, 600 A, Frame J-K, Series C, 8.41 in Back of breaker	A	S251 skuPage.314C960G08 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	L/M-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.314C960G08 (General/Product specifications); oem_spec
Current rating	600 A	A	same as above
Kit contents	G08 (Eaton web 'Special features' attribute)	A	same as above
Dimensions	length / back-of-breaker dimension 7.97 in (L) / 8.41 in (M)	A	S184 p.12-260; oem_spec
Fasteners	thread 1.00-12	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.314C960G08 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.314C960G08 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 11.3 in, height 2.5 in, width 2.5 in, weight 2.7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB), Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Torque values		
Open question	*Same style number listed in L-frame (by stud length) and M-frame 600 A tables - confirm identical part.*		

EDH-EAT-00666	314C960G09	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C L/M-frame rear connecting stud (L: 10.47 in)

OEM part number	314C960G09	A	S184, S251 p.12-260, Tables 12-508..12-510; oem_spec
Alternate / superseded numbers	UPC 786679508923	A	S251 alias; skuPage.314C960G09 (General/Product specifications); oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. L: 10.47 in; M: 600 A	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
	Eaton molded case circuit breaker accessory rear connected studs, Rear connected studs, G09, 600 A, Frame J-K, Series C, 10.91 in Back of breaker	A	S251 skuPage.314C960G09 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	L/M-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.314C960G09 (General/Product specifications); oem_spec
Current rating	600 A	A	same as above
Kit contents	G09 (Eaton web 'Special features' attribute)	A	same as above
Dimensions	length / back-of-breaker dimension 10.47 in (L) / 10.91 in (M)	A	S184 p.12-260; oem_spec
Fasteners	thread 1.00-12	A	same as above

Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.314C960G09 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.314C960G09 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 14.1 in, height 2.5 in, width 2.6 in, weight 3.4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB), Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Torque values		
Open question	*Same style number listed in L-frame (by stud length) and M-frame 600 A tables - confirm identical part.*		

EDH-EAT-00605	KPEK4	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C L-frame end cap kit, 3-pole, .312-18

OEM part number	KPEK4	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 786679013021	A	S251 alias; skuPage.KPEK4 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Imperial end cap kit, Three-pole, Frame L, Series C, 0.312-18 2022 Rev	A	S251 skuPage.KPEK4 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	L-frame 3-pole	A	same as above
Breaker frame	Frame L	A	S251 skuPage.KPEK4 (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-243, Table 12-447; oem_spec
Fasteners	thread .312-18	A	S184 p.12-243, Table 12-447; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEK4 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.KPEK4 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.25 in, height 2.5 in, width 2.5 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00607	KPEK44	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L-frame end cap kit, 4-pole, .312-18

OEM part number	KPEK44	A	S184 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	L-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00606	KPEKM4	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C L-frame end cap kit, 3-pole, M8

OEM part number	KPEKM4	A	S184, S251 p.12-243, Table 12-447; oem_spec
Alternate / superseded numbers	UPC 786679013014	A	S251 alias; skuPage.KPEKM4 (General/Product specifications); oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	S184 p.12-243, Table 12-447; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Accessories and terminals, Keeper nut end cap kit, Frame L, Series C, M-8 thread	A	S251 skuPage.KPEKM4 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-243, Table 12-447; oem_spec
Installation location	line or load conductor	A	same as above
Breaker compatibility	L-frame 3-pole	A	same as above
Breaker frame	Frame L	A	S251 skuPage.KPEKM4 (General/Product specifications); oem_spec
Poles	3	A	S184 p.12-243, Table 12-447; oem_spec
Fasteners	thread M8	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.KPEKM4 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.KPEKM4 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 10.5 in, height 2.5 in, width 2.5 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00608	KPEKM44	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L-frame end cap kit, 4-pole, M8

OEM part number	KPEKM44	A	S184 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	L-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC)

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01334	**BMH4**	Eaton base mounting hardware, L-frame	—	unknown

EDH-EAT-01334	BMH4	Cutler-Hammer	fastener	STATUS UNKNOWN

Eaton base mounting hardware, L-frame

OEM part number	BMH4	A	S184 p. 12-254, Tables 12-457/12-458 Base Mounting Hardware (surface mounting; supplied only on request); oem_spec
Description	Base (surface) mounting hardware: L-frame .250-20 x 1.5 in filister-head screws, lockwashers, flat washers.	A	same as above
Application	accessory	A	same as above
Cross-links	Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC)		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface-mounting hardware for individual/enclosed mounting; confirm whether used for panelboard (PRL3a/PRL4) breaker mounting.*		

Breaker family Series C M-Frame (MDL/HMDL/MDLB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00517	**T600MA1**	Series C M-frame line/load terminal, 600 A, Cu	M-frame MDL/HMDL/MDLB A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00518	**T800MA1**	Series C M-frame line/load terminal, 800 A, Cu	M-frame MDL/HMDL/MDLB A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00514	**TA700MA1**	Series C M-frame line/load terminal, 600 A, Cu/Al	M-frame MDL/HMDL/MDLB A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00519	**TA700MA1CWT**	Series C M-frame terminal with control wire termination (TA700MA1)	M-frame MDL/HMDL A	unknown
EDH-EAT-00515	**TA800MA2**	Series C M-frame line/load terminal, 800 A, Cu/Al	M-frame MDL/HMDL/MDLB; MP definite purpose 800 A; HMDLDC A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00520	**TA800MA2CWT**	Series C M-frame terminal with control wire termination (TA800MA2)	M-frame MDL/HMDL A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00516	**TA801MA**	Series C M-frame line/load terminal, 800 A, Cu/Al	M-frame MDL/HMDL/MDLB; MP definite purpose 800 A; HMDLDC A	Active Eaton product page (no Discontinued banner), accessed

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00521	**TA801MACWT**	Series C M-frame terminal with control wire termination (TA801MA)	M-frame MDL/HMDL **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00517 T600MA1 Eaton / Cutler-Hammer lug-kit ACTIVE EATON PRODUCT P

Series C M-frame line/load terminal, 600 A, Cu

OEM part number	T600MA1	**A**	S184, S251 p.12-140, Table 12-240; oem_spec
Alternate / superseded numbers	UPC 786679420430	**A**	S251 alias; skuPage.T600MA1 (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal	**A**	S184 p.12-140, Table 12-240; oem_spec
	Eaton molded case circuit breaker accessory terminal, Standard copper pressure terminals, 600 A, (2) #2/0 AWG-500 kcmil Cu, For type MAM, HMAM, MAMH breakers, Series C, 1 Accessory	**A**	S251 skuPage.T600MA1 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-140, Table 12-240; oem_spec
Breaker compatibility	M-frame MDL/HMDL/MDLB	**A**	same as above
	For type MAM, HMAM, MAMH breakers (Eaton web 'Used with' attribute)	**A**	S251 skuPage.T600MA1 (General/Product specifications); oem_spec
Current rating	600 A max breaker	**A**	S184 p.12-140, Table 12-240; oem_spec
	600 A	**A**	S251 skuPage.T600MA1 (General/Product specifications); oem_spec
Wire range	(2) 2/0-500 kcmil	**A**	S184 p.12-140, Table 12-240; oem_spec
	(2) #2/0 AWG-500 kcmil Cu	**A**	S251 skuPage.T600MA1 (General/Product specifications); oem_spec
Material	terminal body copper	**A**	S184 p.12-140, Table 12-240; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.T600MA1 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.T600MA1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.6 in, height 3.5 in, width 2.7 in, weight 1.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00518 T800MA1 Eaton / Cutler-Hammer lug-kit ACTIVE EATON PRODUCT P

Series C M-frame line/load terminal, 800 A, Cu

OEM part number	T800MA1	**A**	S184, S251 p.12-140, Table 12-240; oem_spec
Alternate / superseded numbers	UPC 786679421109	**A**	S251 alias; skuPage.T800MA1 (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal	**A**	S184 p.12-140, Table 12-240; oem_spec

	Eaton molded case circuit breaker accessory terminal, Standard copper pressure terminals, 800 A, (3) #3/0 AWG-300 kcmil Cu, For type MAM, HMAM, MAMH breakers, Series C, 1 Accessory	A	S251 skuPage.T800MA1 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-140, Table 12-240; oem_spec
Breaker compatibility	M-frame MDL/HMDL/MDLB	A	same as above
	For type MAM, HMAM, MAMH breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.T800MA1 (General/Product specifications); oem_spec
Current rating	800 A max breaker	A	S184 p.12-140, Table 12-240; oem_spec
	800 A	A	S251 skuPage.T800MA1 (General/Product specifications); oem_spec
Wire range	(3) 3/0-300 kcmil	A	S184 p.12-140, Table 12-240; oem_spec
	(3) #3/0 AWG-300 kcmil Cu	A	S251 skuPage.T800MA1 (General/Product specifications); oem_spec
Material	terminal body copper	A	S184 p.12-140, Table 12-240; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.T800MA1 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.T800MA1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.6 in, height 3.5 in, width 2.6 in, weight 0.9 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00514	**TA700MA1**	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C M-frame line/load terminal, 600 A, Cu/Al

OEM part number	TA700MA1	A	S184, S251 p.12-140, Table 12-240; oem_spec
Alternate / superseded numbers	UPC 786679424865	A	S251 alias; skuPage.TA700MA1 (General/Product specifications); oem_spec
Description	Standard Cu/Al pressure terminal	A	S184 p.12-140, Table 12-240; oem_spec
	Eaton molded case circuit breaker accessory terminal, Optional Al/Cu pressure terminals, 600 A, (2) #1 AWG-500 kcmil Cu/Al, For type MAM, HMAM, MAMH breakers, Series C, 1 Accessory	A	S251 skuPage.TA700MA1 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-140, Table 12-240; oem_spec
Breaker compatibility	M-frame MDL/HMDL/MDLB	A	same as above
	For type MAM, HMAM, MAMH breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.TA700MA1 (General/Product specifications); oem_spec
Current rating	600 (700 per KM/DC table) A max breaker	A	S184 p.12-140, Table 12-240; oem_spec
	600 A	A	S251 skuPage.TA700MA1 (General/Product specifications); oem_spec
Wire range	(2) 1-500 kcmil	A	S184 p.12-140, Table 12-240; oem_spec

	(2) #1 AWG-500 kcmil Cu/Al	A	S251 skuPage.TA700MA1 (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-140, Table 12-240; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA700MA1 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.TA700MA1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.6 in, height 2.4 in, width 2.6 in, weight 0.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00519 **TA700MA1CWT** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series C M-frame terminal with control wire termination (TA700MA1)

OEM part number	TA700MA1CWT	A	S184 p.12-140, Table 12-240; oem_spec
Description	Same as TA700MA1 with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M-frame MDL/HMDL	A	same as above
Wire range	(2) 1-500 kcmil	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00515 **TA800MA2** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C M-frame line/load terminal, 800 A, Cu/Al

OEM part number	TA800MA2	A	S184, S251 p.12-140, Table 12-240; oem_spec
Alternate / superseded numbers	UPC 786679679272	A	S251 alias; skuPage.TA800MA2 (General/Product specifications); oem_spec
Description	Standard Cu/Al pressure terminal	A	S184 p.12-140, Table 12-240; oem_spec
	Eaton molded case circuit breaker accessory terminal, Optional Al/Cu pressure terminals, 800 A, (3) #3/0 AWG-400 kcmil Cu/Al, For type MAM, HMAM, MAMH breakers, Frame J-K, Series C, 2 Accessory	A	S251 skuPage.TA800MA2 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-140, Table 12-240; oem_spec
Breaker compatibility	M-frame MDL/HMDL/MDLB; MP definite purpose 800 A; HMDLDC	A	same as above
	For type MAM, HMAM, MAMH breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.TA800MA2 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	800 (std.) A max breaker	A	S184 p.12-140, Table 12-240; oem_spec
	800 A	A	S251 skuPage.TA800MA2 (General/Product specifications); oem_spec
Wire range	(3) 3/0-400 kcmil	A	S184 p.12-140, Table 12-240; oem_spec

	(3) #3/0 AWG-400 kcmil Cu/Al	A	S251 skuPage.TA800MA2 (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-140, Table 12-240; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA800MA2 (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.TA800MA2 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.6 in, height 3.4 in, width 2.5 in, weight 0.7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00520 TA800MA2CWT Eaton / Cutler-Hammer lug-kit ACTIVE EATON PRODUCT P

Series C M-frame terminal with control wire termination (TA800MA2)

OEM part number	TA800MA2CWT	A	S184, S251 p.12-140, Table 12-240; oem_spec
Alternate / superseded numbers	UPC 782114380093	A	S251 alias; skuPage.TA800MA2CWT (General/Product specifications); oem_spec
Description	Same as TA800MA2 with control wire termination	A	S184 p.12-140, Table 12-240; oem_spec
	Eaton molded case circuit breaker accessory terminal, Optional Al/Cu pressure terminals, 800 A, (3) #3/0 AWG-400 kcmil Cu/Al, For type MAM, HMAM, MAMH breakers, Frame J-K, Series C	A	S251 skuPage.TA800MA2CWT (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-140, Table 12-240; oem_spec
Breaker compatibility	M-frame MDL/HMDL	A	same as above
	For type MAM, HMAM, MAMH breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.TA800MA2CWT (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	800 A	A	same as above
Wire range	(3) 3/0-400 kcmil	A	S184 p.12-140, Table 12-240; oem_spec
	(3) #3/0 AWG-400 kcmil Cu/Al	A	S251 skuPage.TA800MA2CWT (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-140, Table 12-240; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA800MA2CWT (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.TA800MA2CWT (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2 in, height 1.5 in, width 1.5 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00516 TA801MA Eaton / Cutler-Hammer lug-kit ACTIVE EATON PRODUCT P

Series C M-frame line/load terminal, 800 A, Cu/Al

OEM part number	TA801MA	**A**	S184, S251 p.12-140, Table 12-240; oem_spec
Alternate / superseded numbers	UPC 786679679289	**A**	S251 alias; skuPage.TA801MA (General/Product specifications); oem_spec
Description	Standard Cu/Al pressure terminal	**A**	S184 p.12-140, Table 12-240; oem_spec
	Eaton molded case circuit breaker accessory terminal, Optional Al/Cu pressure terminals, 800 A, (2) 500-750 kcmil Cu/Al, For type MAM, HMAM, MAMH breakers, Frame J-K	**A**	S251 skuPage.TA801MA (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-140, Table 12-240; oem_spec
Breaker compatibility	M-frame MDL/HMDL/MDLB; MP definite purpose 800 A; HMDLDC	**A**	same as above
	For type MAM, HMAM, MAMH breakers (Eaton web 'Used with' attribute)	**A**	S251 skuPage.TA801MA (General/Product specifications); oem_spec
Breaker frame	Frame J-K	**A**	same as above
Current rating	800 A max breaker	**A**	S184 p.12-140, Table 12-240; oem_spec
	800 A	**A**	S251 skuPage.TA801MA (General/Product specifications); oem_spec
Wire range	(2) 500-750 kcmil	**A**	S184 p.12-140, Table 12-240; oem_spec
	(2) 500-750 kcmil Cu/Al	**A**	S251 skuPage.TA801MA (General/Product specifications); oem_spec
Material	terminal body aluminum	**A**	S184 p.12-140, Table 12-240; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.TA801MA (General/Product specifications); oem_spec
Listing / approvals	UL Listed	**A**	S251 skuPage.TA801MA (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.2 in, height 4.5 in, width 2.5 in, weight 0.75 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00521 **TA801MACWT** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C M-frame terminal with control wire termination (TA801MA)

OEM part number	TA801MACWT	**A**	S184, S251 p.12-140, Table 12-240; oem_spec
Alternate / superseded numbers	UPC 782114380109	**A**	S251 alias; skuPage.TA801MACWT (General/Product specifications); oem_spec
Description	Same as TA801MA with control wire termination	**A**	S184 p.12-140, Table 12-240; oem_spec
	Eaton molded case circuit breaker accessory terminal, Optional Al/Cu pressure terminals, 800 A, (2) 500-750 kcmil Cu/Al, For type MAM, HMAM, MAMH breakers, Frame J-K, Series C	**A**	S251 skuPage.TA801MACWT (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-140, Table 12-240; oem_spec
Breaker compatibility	M-frame MDL/HMDL	**A**	same as above

	For type MAM, HMAM, MAMH breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.TA801MACWT (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	800 A	A	same as above
Wire range	(2) 500-750 kcmil	A	S184 p.12-140, Table 12-240; oem_spec
	(2) 500-750 kcmil Cu/Al	A	S251 skuPage.TA801MACWT (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-140, Table 12-240; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA801MACWT (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.TA801MACWT (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2 in, height 1.5 in, width 1.5 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00695	**314C996G01**	Series C M-frame panelboard connecting strap, short, 3.50 in, 800 A	M-frame in panelboards (bus spacing per description) A	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-00696	**314C996G02**	Series C M-frame panelboard connecting strap, medium, 3.50 in, 800 A	M-frame in panelboards (bus spacing per description) A	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-00697	**314C996G03**	Series C M-frame panelboard connecting strap, long, 3.50 in, 800 A	M-frame in panelboards (bus spacing per description) A	discontinued (Eaton product page shows "Discontinued" banner

EDH-EAT-00695	314C996G01	Eaton / Cutler-Hammer	connector-strap	DISCONTINUED (EATON PR

Series C M-frame panelboard connecting strap, short, 3.50 in, 800 A

OEM part number	314C996G01	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679836088	A	S251 alias; skuPage.314C996G01 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. short, 3.50 in, 800 A	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G01, Short, Frame M, Series C	A	S251 skuPage.314C996G01 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	M-frame in panelboards (bus spacing per description)	A	same as above
Breaker frame	Frame M	A	S251 skuPage.314C996G01 (General/Product specifications); oem_spec
Kit contents	G01 (Eaton web 'Special features' attribute)	A	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.314C996G01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.2 in, height 4.2 in, width 2.5 in, weight 1.4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00696	314C996G02	Eaton / Cutler-Hammer	connector-strap	DISCONTINUED (EATON PR

Series C M-frame panelboard connecting strap, medium, 3.50 in, 800 A

OEM part number	314C996G02	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679836101	A	S251 alias; skuPage.314C996G02 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. medium, 3.50 in, 800 A	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G02, Medium, Frame J-K, Series C	A	S251 skuPage.314C996G02 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	M-frame in panelboards (bus spacing per description)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.314C996G02 (General/Product specifications); oem_spec
Kit contents	G02 (Eaton web 'Special features' attribute)	A	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.314C996G02 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.4 in, height 2.5 in, width 2.6 in, weight 2.4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00697	314C996G03	Eaton / Cutler-Hammer	connector-strap	DISCONTINUED (EATON PR

Series C M-frame panelboard connecting strap, long, 3.50 in, 800 A

OEM part number	314C996G03	**A**	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679836125	**A**	S251 alias; skuPage.314C996G03 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. long, 3.50 in, 800 A	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G03, Long, Frame J-K, Series C	**A**	S251 skuPage.314C996G03 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	**A**	same as above
Breaker compatibility	M-frame in panelboards (bus spacing per description)	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.314C996G03 (General/Product specifications); oem_spec
Kit contents	G03 (Eaton web 'Special features' attribute)	**A**	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	**A**	same as above
Listing / approvals	UL Listed	**A**	S251 skuPage.314C996G03 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 11.3 in, height 2.5 in, width 2.6 in, weight 3.45 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00705	**315C270H01**	Series C M/N-frame panelboard strap mounting bracket	M/N-frame **A**	discontinued (Eaton product page shows "Discontinued" banner

EDH-EAT-00705	315C270H01	Eaton / Cutler-Hammer	mounting-bracket	DISCONTINUED (EATON PR

Series C M/N-frame panelboard strap mounting bracket

OEM part number	315C270H01	**A**	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679836149	**A**	S251 alias; skuPage.315C270H01 (General/Product specifications); oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations); N-frame requires four	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory mounting bracket, Mounting bracket, Frame M, Series C	**A**	S251 skuPage.315C270H01 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	panelboard interior, supports breaker/strap	**A**	same as above
Breaker compatibility	M/N-frame	**A**	same as above
Breaker frame	Frame M	**A**	S251 skuPage.315C270H01 (General/Product specifications); oem_spec
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	**A**	same as above
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.315C270H01 (General/Product specifications); oem_spec
Installation requirements	; (Eaton web 'Catalog Notes')	**A**	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 3 in, height 0.5 in, width 2 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB), Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00643	**208B966G01**	Series C M-frame terminal shield	M-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00643	208B966G01	Eaton / Cutler-Hammer	barrier	ACTIVE EATON PRODUCT P

Series C M-frame terminal shield

OEM part number	208B966G01	A	S184, S251 p.12-248, Tables 12-461..12-467; oem_spec
Alternate / superseded numbers	UPC 786679971123	A	S251 alias; skuPage.208B966G01 (General/Product specifications); oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. M-frame terminal shield	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
	Eaton molded case circuit breakers electrical aftermarket accessory mounting bracket, Line terminal shield, G01, For type MA, HMA, MC, HMC breakers	A	S251 skuPage.208B966G01 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Installation location	terminal area	A	same as above
Breaker compatibility	M-frame	A	same as above
	For type MA,HMA,MC,HMC breakers (Eaton web 'Used with' attribute)	A	S251 skuPage.208B966G01 (General/Product specifications); oem_spec
Kit contents	package of 1	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
	G01 (Eaton web 'Special features' attribute)	A	S251 skuPage.208B966G01 (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.208B966G01 (General/Product specifications); oem_spec
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00667	**314C960G01**	Series C M-frame rear connecting stud (225 A)	M-frame A	unknown
EDH-EAT-00668	**314C960G04**	Series C M-frame rear connecting stud (400 A)	M-frame A	unknown
EDH-EAT-00669	**314C960G05**	Series C M-frame rear connecting stud (400 A)	M-frame A	unknown
EDH-EAT-00670	**314C960G06**	Series C M-frame rear connecting stud (400 A)	M-frame A	unknown
EDH-EAT-00671	**314C960G10**	Series C M-frame rear connecting stud (800 A)	M-frame A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00672	**314C960G11**	Series C M-frame rear connecting stud (800 A)	M-frame A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00673	**314C960G12**	Series C M-frame rear connecting stud (800 A)	M-frame A	unknown

EDH-EAT-00667	314C960G01	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (225 A)

OEM part number	314C960G01	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 225 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 3.66 in	A	S184 p.12-260; oem_spec
Fasteners	thread .50-13	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00668	314C960G04	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (400 A)

OEM part number	314C960G04	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 400 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 5.91 in	A	S184 p.12-260; oem_spec
Fasteners	thread .75-16	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00669	314C960G05	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (400 A)

OEM part number	314C960G05	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 400 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 8.41 in	A	S184 p.12-260; oem_spec
Fasteners	thread .75-16	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00670	314C960G06	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (400 A)

OEM part number	314C960G06	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 400 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 10.91 in	A	S184 p.12-260; oem_spec
Fasteners	thread .75-16	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00671	314C960G10	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C M-frame rear connecting stud (800 A)

OEM part number	314C960G10	A	S184, S251 p.12-260, Tables 12-508..12-510; oem_spec
Alternate / superseded numbers	UPC 786679509524	A	S251 alias; skuPage.314C960G10 (General/Product specifications); oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
	Eaton molded case circuit breaker accessory rear connected studs, Rear connected studs, G10, 800 A, Frame J-K, Series C, 5.91 in Back of breaker	A	S251 skuPage.314C960G10 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.314C960G10 (General/Product specifications); oem_spec
Current rating	800 A	A	same as above
Kit contents	G10 (Eaton web 'Special features' attribute)	A	same as above
Dimensions	length / back-of-breaker dimension 5.91 in	A	S184 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.314C960G10 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.314C960G10 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.5 in, height 2.4 in, width 2.6 in, weight 2.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Torque values		

EDH-EAT-00672	314C960G11	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series C M-frame rear connecting stud (800 A)

OEM part number	314C960G11	A	S184, S251 p.12-260, Tables 12-508..12-510; oem_spec

Alternate / superseded numbers	UPC 786679508947	A	S251 alias; skuPage.314C960G11 (General/Product specifications); oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
	Eaton molded case circuit breaker accessory rear connected studs, Rear connected studs, G11, 800 A, Frame J-K, Series C, 8.41 in Back of breaker	A	S251 skuPage.314C960G11 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.314C960G11 (General/Product specifications); oem_spec
Current rating	800 A	A	same as above
Kit contents	G11 (Eaton web 'Special features' attribute)	A	same as above
Dimensions	length / back-of-breaker dimension 8.41 in	A	S184 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.314C960G11 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.314C960G11 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 11.2 in, height 2.7 in, width 2.7 in, weight 3.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Torque values		

EDH-EAT-00673	314C960G12	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (800 A)

OEM part number	314C960G12	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 10.91 in	A	S184 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker family Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS)

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-01335	**BMH5**	Eaton base mounting hardware, M/N-frame	—	unknown

EDH-EAT-01335	BMH5	Cutler-Hammer	fastener	STATUS UNKNOWN

Eaton base mounting hardware, M/N-frame

OEM part number	BMH5	A	S184 p. 12-254, Tables 12-457/12-458 Base Mounting Hardware (surface mounting; supplied only on request); oem_spec
Description	Base (surface) mounting hardware: M/N-frame .3125-18 x 1.25 in screws and lockwashers.	A	same as above
Application	accessory	A	same as above
Cross-links	Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC)		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface-mounting hardware for individual/enclosed mounting; confirm whether used for panelboard (PRL3a/PRL4) breaker mounting.*		

Breaker family Series C N-Frame (ND/HND/NDC/NB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00527	**T1000NB1**	Series C N-frame line/load terminal, 1000 A, Cu	N-frame ND/HND/NDC A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00528	**T1200NB3**	Series C N-frame line/load terminal, 1200 A, Cu	N-frame ND/HND/NDC A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00526	**T700NB1**	Series C N-frame line/load terminal, 700 A, Cu	N-frame ND/HND/NDC A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00523	**TA1000NB1**	Series C N-frame line/load terminal, 1000 A, Cu/Al	N-frame ND/HND/NDC; NBDC 700-1000 A DC; NG enclosed 1000 A A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00524	**TA1200NB1**	Series C N-frame line/load terminal, 1200 A, Cu/Al	N-frame ND/HND/NDC; NBDC 1200 A; NG enclosed 1200 A A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00525	**TA1201NB1**	Series C N-frame line/load terminal, 1200 A, Cu/Al	N-frame ND/HND/NDC A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00522	**TA700NB1**	Series C N-frame line/load terminal, 700 A, Cu/Al	N-frame ND/HND/NDC; NG enclosed 700 A A	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00527	T1000NB1	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C N-frame line/load terminal, 1000 A, Cu

OEM part number	T1000NB1	A	S184, S251 p.12-162, Table 12-266; oem_spec
Alternate / superseded numbers	UPC 786679612224	A	S251 alias; skuPage.T1000NB1 (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal	A	S184 p.12-162, Table 12-266; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Optional copper and Cu/Al pressure type terminals, 1000 A, (3) #3/0 AWG-500 kcmil, N-Frame, Frame J-K, Series G	A	S251 skuPage.T1000NB1 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-162, Table 12-266; oem_spec
Breaker compatibility	N-frame ND/HND/NDC	A	same as above
	N-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.T1000NB1 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above

Current rating	1000 A max breaker	A	S184 p.12-162, Table 12-266; oem_spec
	1000 A	A	S251 skuPage.T1000NB1 (General/Product specifications); oem_spec
Wire range	(3) 3/0-500 kcmil (95-240 mm2)	A	S184 p.12-162, Table 12-266; oem_spec
	(3) #3/0 AWG-500 kcmil	A	S251 skuPage.T1000NB1 (General/Product specifications); oem_spec
Material	terminal body copper	A	S184 p.12-162, Table 12-266; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.T1000NB1 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.T1000NB1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.2 in, height 4.6 in, width 2.4 in, weight 2.05 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00528 T1200NB3 Eaton / Cutler-Hammer lug-kit ACTIVE EATON PRODUCT P

Series C N-frame line/load terminal, 1200 A, Cu

OEM part number	T1200NB3	A	S184, S251 p.12-162, Table 12-266; oem_spec
Alternate / superseded numbers	UPC 786679166987	A	S251 alias; skuPage.T1200NB3 (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal	A	S184 p.12-162, Table 12-266; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Optional copper and Cu/Al pressure type terminals, 1200 A, (4) #3/0 AWG-400 kcmil, N-Frame, Frame J-K, Series G	A	S251 skuPage.T1200NB3 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-162, Table 12-266; oem_spec
Breaker compatibility	N-frame ND/HND/NDC	A	same as above
	N-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.T1200NB3 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	1200 A max breaker	A	S184 p.12-162, Table 12-266; oem_spec
	1200 A	A	S251 skuPage.T1200NB3 (General/Product specifications); oem_spec
Wire range	(4) 3/0-400 kcmil (95-185 mm2)	A	S184 p.12-162, Table 12-266; oem_spec
	(4) #3/0 AWG-400 kcmil	A	S251 skuPage.T1200NB3 (General/Product specifications); oem_spec
Material	terminal body copper	A	S184 p.12-162, Table 12-266; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.T1200NB3 (General/Product specifications); oem_spec

Listing / approvals	Contact Manufacturer	A	S251 skuPage.T1200NB3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4.7 in, height 2.4 in, width 3.2 in, weight 3.25 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00526 **T700NB1** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C N-frame line/load terminal, 700 A, Cu

OEM part number	T700NB1	A	S184, S251 p.12-162, Table 12-266; oem_spec
Alternate / superseded numbers	UPC 786679420812	A	S251 alias; skuPage.T700NB1 (General/Product specifications); oem_spec
Description	Optional Cu pressure terminal	A	S184 p.12-162, Table 12-266; oem_spec
	Eaton molded case circuit breaker accessory terminal, Optional copper and Cu/Al pressure type terminals, 700 A, (2) #2/0 AWG-500 kcmil, N-Frame, Frame J-K, Series G	A	S251 skuPage.T700NB1 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-162, Table 12-266; oem_spec
Breaker compatibility	N-frame ND/HND/NDC	A	same as above
	N-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.T700NB1 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	700 A max breaker	A	S184 p.12-162, Table 12-266; oem_spec
	700 A	A	S251 skuPage.T700NB1 (General/Product specifications); oem_spec
Wire range	(2) 2/0-500 kcmil (70-240 mm2)	A	S184 p.12-162, Table 12-266; oem_spec
	(2) #2/0 AWG-500 kcmil	A	S251 skuPage.T700NB1 (General/Product specifications); oem_spec
Material	terminal body copper	A	S184 p.12-162, Table 12-266; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.T700NB1 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.T700NB1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.6 in, height 3.6 in, width 2.6 in, weight 1.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00523 **TA1000NB1** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C N-frame line/load terminal, 1000 A, Cu/Al

OEM part number	TA1000NB1	A	S184, S251 p.12-162, Table 12-266; oem_spec
Alternate / superseded numbers	UPC 786679612286	A	S251 alias; skuPage.TA1000NB1 (General/Product specifications); oem_spec

Description	Standard Cu/Al pressure terminal; terminal rating AL9CU	A	S184 p.12-162, Table 12-266; oem_spec
	Eaton molded case circuit breaker accessory terminal, Standard Cu/Al pressure terminals, 1000 A, (3) #3/0 AWG-400 kcmil, N-Frame, Frame J-K, Series G	A	S251 skuPage.TA1000NB1 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-162, Table 12-266; oem_spec
Breaker compatibility	N-frame ND/HND/NDC; NBDC 700-1000 A DC; NG enclosed 1000 A	A	same as above
	N-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.TA1000NB1 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	1000 A max breaker	A	S184 p.12-162, Table 12-266; oem_spec
	1000 A	A	S251 skuPage.TA1000NB1 (General/Product specifications); oem_spec
Wire range	(3) 3/0-400 kcmil (95-185 mm2)	A	S184 p.12-162, Table 12-266; oem_spec
	(3) #3/0 AWG-400 kcmil	A	S251 skuPage.TA1000NB1 (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-162, Table 12-266; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA1000NB1 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.TA1000NB1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.6 in, height 3.4 in, width 2.6 in, weight 0.85 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Footnote markers for AL9CU/AL7CU ratings lost in extraction - which terminals are AL7CU?*		

EDH-EAT-00524 **TA1200NB1** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C N-frame line/load terminal, 1200 A, Cu/Al

OEM part number	TA1200NB1	A	S184, S251 p.12-162, Table 12-266; oem_spec
Alternate / superseded numbers	UPC 786679612316	A	S251 alias; skuPage.TA1200NB1 (General/Product specifications); oem_spec
Description	Standard Cu/Al pressure terminal; terminal rating AL9CU	A	S184 p.12-162, Table 12-266; oem_spec
	Eaton molded case circuit breaker accessory terminal, Standard Cu/Al pressure terminals, 1200 A, (4) #4/0 AWG-500 kcmil, N-Frame, Frame J-K, Series G	A	S251 skuPage.TA1200NB1 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-162, Table 12-266; oem_spec
Breaker compatibility	N-frame ND/HND/NDC; NBDC 1200 A; NG enclosed 1200 A	A	same as above
	N-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.TA1200NB1 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above

Current rating	1200 A max breaker	A	S184 p.12-162, Table 12-266; oem_spec
	1200 A	A	S251 skuPage.TA1200NB1 (General/Product specifications); oem_spec
Wire range	(4) 4/0-500 kcmil (120-240 mm2)	A	S184 p.12-162, Table 12-266; oem_spec
	(4) #4/0 AWG-500 kcmil	A	S251 skuPage.TA1200NB1 (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-162, Table 12-266; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA1200NB1 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.TA1200NB1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.2 in, height 4.5 in, width 2.5 in, weight 1.25 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Footnote markers for AL9CU/AL7CU ratings lost in extraction - which terminals are AL7CU?*		

EDH-EAT-00525 **TA1201NB1** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C N-frame line/load terminal, 1200 A, Cu/Al

OEM part number	TA1201NB1	A	S184, S251 p.12-162, Table 12-266; oem_spec
Alternate / superseded numbers	UPC 786679612347	A	S251 alias; skuPage.TA1201NB1 (General/Product specifications); oem_spec
Description	Standard Cu/Al pressure terminal; terminal rating AL9CU	A	S184 p.12-162, Table 12-266; oem_spec
	Eaton molded case circuit breaker accessory terminal, Standard Cu/Al pressure terminals, 1200 A, (3) 500-750 kcmil, N-Frame, Frame J-K, Series G	A	S251 skuPage.TA1201NB1 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-162, Table 12-266; oem_spec
Breaker compatibility	N-frame ND/HND/NDC	A	same as above
	N-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.TA1201NB1 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	1200 A max breaker	A	S184 p.12-162, Table 12-266; oem_spec
	1200 A	A	S251 skuPage.TA1201NB1 (General/Product specifications); oem_spec
Wire range	(3) 500-750 kcmil (300-400 mm2)	A	S184 p.12-162, Table 12-266; oem_spec
	(3) 500-750 kcmil	A	S251 skuPage.TA1201NB1 (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-162, Table 12-266; oem_spec

Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA1201NB1 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.TA1201NB1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.2 in, height 4.4 in, width 2.5 in, weight 1.25 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Footnote markers for AL9CU/AL7CU ratings lost in extraction - which terminals are AL7CU?*		

EDH-EAT-00522 **TA700NB1** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C N-frame line/load terminal, 700 A, Cu/Al

OEM part number	TA700NB1	A	S184, S251 p.12-162, Table 12-266; oem_spec
Alternate / superseded numbers	UPC 786679424896	A	S251 alias; skuPage.TA700NB1 (General/Product specifications); oem_spec
Description	Standard Cu/Al pressure terminal	A	S184 p.12-162, Table 12-266; oem_spec
	Eaton molded case circuit breaker accessory terminal, Terminal kit, N-Frame	A	S251 skuPage.TA700NB1 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-162, Table 12-266; oem_spec
Breaker compatibility	N-frame ND/HND/NDC; NG enclosed 700 A	A	same as above
	N-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.TA700NB1 (General/Product specifications); oem_spec
Current rating	700 A max breaker	A	S184 p.12-162, Table 12-266; oem_spec
Kit contents	Used with N-frame (Eaton web 'Special features' attribute)	A	S251 skuPage.TA700NB1 (General/Product specifications); oem_spec
Wire range	(2) 1-500 kcmil (50-240 mm2)	A	S184 p.12-162, Table 12-266; oem_spec
Material	terminal body aluminum	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA700NB1 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.TA700NB1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.7 in, height 2.6 in, width 2.5 in, weight 1.05 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00698	**505C606G04**	Series C N-frame panelboard connecting strap, short, 3.50 in, 1200 A	N-frame in panelboards (bus spacing per description) A	discontinued (Eaton product page shows "Discontinued" banner
EDH-EAT-00699	**505C606G05**	Series C N-frame panelboard connecting strap, medium, 3.50 in, 1200 A	N-frame in panelboards (bus spacing per description) A	discontinued (Eaton product page shows "Discontinued" banner

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00700	**505C606G06**	Series C N-frame panelboard connecting strap, long, 3.50 in, 1200 A	N-frame in panelboards (bus spacing per description) **A**	discontinued (Eaton product page shows "Discontinued" banner

EDH-EAT-00698	505C606G04	Eaton / Cutler-Hammer	connector-strap	DISCONTINUED (EATON PR

Series C N-frame panelboard connecting strap, short, 3.50 in, 1200 A

OEM part number	505C606G04	**A**	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679838662	**A**	S251 alias; skuPage.505C606G04 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. short, 3.50 in, 1200 A	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G04, 1200 A, Short, Frame J-K, Series C	**A**	S251 skuPage.505C606G04 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	**A**	same as above
Breaker compatibility	N-frame in panelboards (bus spacing per description)	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.505C606G04 (General/Product specifications); oem_spec
Current rating	1200 A	**A**	same as above
Kit contents	G04 (Eaton web 'Special features' attribute)	**A**	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	**A**	same as above
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.505C606G04 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.4 in, height 2.5 in, width 2.8 in, weight 2.45 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00699	505C606G05	Eaton / Cutler-Hammer	connector-strap	DISCONTINUED (EATON PR

Series C N-frame panelboard connecting strap, medium, 3.50 in, 1200 A

OEM part number	505C606G05	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679838686	A	S251 alias; skuPage.505C606G05 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. medium, 3.50 in, 1200 A	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G05, 1200 A, Medium, Frame J-K, Series C	A	S251 skuPage.505C606G05 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	N-frame in panelboards (bus spacing per description)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.505C606G05 (General/Product specifications); oem_spec
Current rating	1200 A	A	same as above
Kit contents	G05 (Eaton web 'Special features' attribute)	A	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.505C606G05 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.5 in, height 2.5 in, width 2.7 in, weight 3.9 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00700	505C606G06	Eaton / Cutler-Hammer	connector-strap	DISCONTINUED (EATON PR

Series C N-frame panelboard connecting strap, long, 3.50 in, 1200 A

OEM part number	505C606G06	A	S184, S251 p.12-261, Tables 12-511..12-521; oem_spec
Alternate / superseded numbers	UPC 786679838709	A	S251 alias; skuPage.505C606G06 (General/Product specifications); oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. long, 3.50 in, 1200 A	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
	Eaton molded case circuit breaker accessory panelboard connecting strap, Panelboard connecting straps, G06, 1200 A, Long, Frame J-K, Series C	A	S251 skuPage.505C606G06 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-261, Tables 12-511..12-521; oem_spec
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	N-frame in panelboards (bus spacing per description)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.505C606G06 (General/Product specifications); oem_spec
Current rating	1200 A	A	same as above
Kit contents	G06 (Eaton web 'Special features' attribute)	A	same as above
Status	discontinued (Eaton product page shows "Discontinued" banner, accessed 2026-10-21)	A	same as above
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.505C606G06 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 14.2 in, height 2.4 in, width 2.8 in, weight 5.4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00650	**IPB5**	Series C interphase barrier (N; NG)	N; NG (Table 12-87) A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00644	**NTS3K**	Series C N-frame terminal shield	N-frame A	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00650	IPB5	Eaton / Cutler-Hammer	barrier	ACTIVE EATON PRODUCT P

Series C interphase barrier (N; NG)

OEM part number	IPB5	A	S184, S251 p.12-249, Table 12-469; oem_spec
Alternate / superseded numbers	UPC 786679225509	A	S251 alias; skuPage.IPB5 (General/Product specifications); oem_spec
Description	Interphase barriers: high-dielectric insulating plates installed in molded slots between terminals for added clearance; field installation only; two per package	A	S184 p.12-249, Table 12-469; oem_spec
	Eaton molded case circuit breaker accessory barrier kit accessory, Interphase barrier kit, N-Frame, Frame J-K, Series C	A	S251 skuPage.IPB5 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-249, Table 12-469; oem_spec
Breaker compatibility	N; NG (Table 12-87)	A	same as above

	N-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.IPB5 (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Kit contents	2 per package	A	S184 p.12-249, Table 12-469; oem_spec
	Used with N-frame (Eaton web 'Special features' attribute)	A	S251 skuPage.IPB5 (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	Contact Manufacturer	A	S251 skuPage.IPB5 (General/Product specifications); oem_spec
Installation requirements	Two per package. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 0.25 in, width 5.5 in, weight 0.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB), Series G NG-Frame		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00644 **NTS3K** Eaton / Cutler-Hammer barrier **ACTIVE EATON PRODUCT P**

Series C N-frame terminal shield

OEM part number	NTS3K	A	S184, S251 p.12-248, Tables 12-461..12-467; oem_spec
Alternate / superseded numbers	UPC 786685100852	A	S251 alias; skuPage.NTS3K (General/Product specifications); oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. N-frame terminal shield	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
	Eaton molded case circuit breaker accessory terminal shield kit, Terminal Shield Kit, N-Frame, Frame J-K	A	S251 skuPage.NTS3K (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Installation location	terminal area	A	same as above
Breaker compatibility	N-frame	A	S184, S251 p.12-248, Tables 12-461..12-467; oem_spec
Breaker frame	Frame J-K	A	S251 skuPage.NTS3K (General/Product specifications); oem_spec
Kit contents	package of 1	A	S184 p.12-248, Tables 12-461..12-467; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.NTS3K (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.NTS3K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 11.5 in, height 7 in, width 8 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00678	**373B375G03**	Series C N-frame rear connecting stud (1200 A)	N-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00677	**373B375G04**	Series C N-frame rear connecting stud (1200 A)	N-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00674	**623B222G01**	Series C N-frame rear connecting stud (800 A)	N-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00675	**623B222G02**	Series C N-frame rear connecting stud (800 A)	N-frame **A**	unknown
EDH-EAT-00676	**623B222G03**	Series C N-frame rear connecting stud (800 A)	N-frame **A**	unknown

EDH-EAT-00678 373B375G03 Eaton / Cutler-Hammer breaker-accessory ACTIVE EATON PRODUCT P

Series C N-frame rear connecting stud (1200 A)

OEM part number	373B375G03	**A**	S184, S251 p.12-260, Tables 12-508..12-510; oem_spec
Alternate / superseded numbers	UPC 786679487136	**A**	S251 alias; skuPage.373B375G03 (General/Product specifications); oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 1200 A	**A**	S184 p.12-260, Tables 12-508..12-510; oem_spec
	Eaton molded case circuit breaker accessory stud, Stud, G03, 120 A, Frame J-K, Series C, 10.5 in Back of breaker	**A**	S251 skuPage.373B375G03 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-260, Tables 12-508..12-510; oem_spec
Installation location	rear connection, line/load	**A**	same as above
Breaker compatibility	N-frame	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.373B375G03 (General/Product specifications); oem_spec
Current rating	120 A	**A**	same as above
Kit contents	G03 (Eaton web 'Special features' attribute)	**A**	same as above
Dimensions	length / back-of-breaker dimension 10.5 in	**A**	S184 p.12-260; oem_spec
Fasteners	thread 1.25-12	**A**	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.373B375G03 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.373B375G03 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 14.2 in, height 2.5 in, width 2.7 in, weight 5.4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Torque values		

EDH-EAT-00677 373B375G04 Eaton / Cutler-Hammer breaker-accessory ACTIVE EATON PRODUCT P

Series C N-frame rear connecting stud (1200 A)

OEM part number	373B375G04	**A**	S184, S251 p.12-260, Tables 12-508..12-510; oem_spec
Alternate / superseded numbers	UPC 786679487143	**A**	S251 alias; skuPage.373B375G04 (General/Product specifications); oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 1200 A	**A**	S184 p.12-260, Tables 12-508..12-510; oem_spec

	Eaton molded case circuit breaker accessory stud, Stud, G04, 120 A, Frame J-K, Series C, 5.5 in Back of breaker	A	S251 skuPage.373B375G04 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	N-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.373B375G04 (General/Product specifications); oem_spec
Current rating	120 A	A	same as above
Kit contents	G04 (Eaton web 'Special features' attribute)	A	same as above
Dimensions	length / back-of-breaker dimension 5.5 in	A	S184 p.12-260; oem_spec
Fasteners	thread 1.25-12	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.373B375G04 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.373B375G04 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.6 in, height 2.5 in, width 2.3 in, weight 3.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Torque values		

EDH-EAT-00674 **623B222G01** Eaton / Cutler-Hammer breaker-accessory **ACTIVE EATON PRODUCT P**

Series C N-frame rear connecting stud (800 A)

OEM part number	623B222G01	A	S184, S251 p.12-260, Tables 12-508..12-510; oem_spec
Alternate / superseded numbers	UPC 786679487013	A	S251 alias; skuPage.623B222G01 (General/Product specifications); oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
	Eaton molded case circuit breaker accessory stud, Stud, G01, 800 A, Frame J-K, Series C, 5.5 in Extension back of breaker	A	S251 skuPage.623B222G01 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	N-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.623B222G01 (General/Product specifications); oem_spec
Current rating	800 A	A	same as above
Kit contents	G01 (Eaton web 'Special features' attribute)	A	same as above
Dimensions	length / back-of-breaker dimension 5.5 in	A	S184 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.623B222G01 (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.623B222G01 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.3 in, height 2.5 in, width 2.6 in, weight 2.6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above

Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Torque values		

EDH-EAT-00675	623B222G02	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C N-frame rear connecting stud (800 A)

OEM part number	623B222G02	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	N-frame	A	same as above
Dimensions	length / back-of-breaker dimension 8.0 in	A	S184 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00676	623B222G03	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C N-frame rear connecting stud (800 A)

OEM part number	623B222G03	A	S184 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	N-frame	A	same as above
Dimensions	length / back-of-breaker dimension 10.5 in	A	S184 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker family Series C R-Frame (RD/RDC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00531	**T1600RD**	Series C R-frame line/load terminal, 1600 A, Cu	R-frame RD/RDC A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00530	**TA1600RD**	Series C R-frame line/load terminal, 1600 A, Cu/Al	R-frame RD/RDC A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00532	**TA2000RD**	Series C R-frame line/load terminal, 2000 A, Cu/Al	R-frame RD/RDC A	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00531	T1600RD	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C R-frame line/load terminal, 1600 A, Cu

OEM part number	T1600RD	A	S184, S251 p.12-181, Table 12-299; oem_spec
Alternate / superseded numbers	UPC 786679420546	A	S251 alias; skuPage.T1600RD (General/Product specifications); oem_spec
Description	Wire terminal, English hardware	A	S184 p.12-181, Table 12-299; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Copper line or load terminal, RD-Frame Breaker with 1600A Maximum, Frame J-K, Series G	A	S251 skuPage.T1600RD (General/Product specifications); oem_spec

Application	accessory	A	S184 p.12-181, Table 12-299; oem_spec
Breaker compatibility	R-frame RD/RDC	A	same as above
	RD-frame breaker with 1600A Maximum (Eaton web 'Used with' attribute)	A	S251 skuPage.T1600RD (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	1600 A max breaker	A	S184 p.12-181, Table 12-299; oem_spec
Kit contents	Used with RD-frame Breaker with 1600A Maximum (Eaton web 'Special features' attribute)	A	S251 skuPage.T1600RD (General/Product specifications); oem_spec
Wire range	(4) 1-600 kcmil (50-300 mm2)	A	S184 p.12-181, Table 12-299; oem_spec
Material	terminal body copper	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.T1600RD (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.T1600RD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4.1 in, height 4.8 in, width 4.2 in, weight 5.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00530 **TA1600RD** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series C R-frame line/load terminal, 1600 A, Cu/Al

OEM part number	TA1600RD	A	S184, S251 p.12-181, Table 12-299; oem_spec
Alternate / superseded numbers	UPC 786679420553	A	S251 alias; skuPage.TA1600RD (General/Product specifications); oem_spec
Description	Wire terminal, English hardware	A	S184 p.12-181, Table 12-299; oem_spec
	Eaton molded case circuit breaker accessory terminal, Line and load terminals, 1600 A, (4) 500-1000 kcmil, R-Frame, Frame J-K, Series G	A	S251 skuPage.TA1600RD (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-181, Table 12-299; oem_spec
Breaker compatibility	R-frame RD/RDC	A	same as above
	R-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.TA1600RD (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	1600 A max breaker	A	S184 p.12-181, Table 12-299; oem_spec
	1600 A	A	S251 skuPage.TA1600RD (General/Product specifications); oem_spec
Wire range	(4) 500-1000 kcmil (300-500 mm2)	A	S184 p.12-181, Table 12-299; oem_spec
	(4) 500-1000 kcmil	A	S251 skuPage.TA1600RD (General/Product specifications); oem_spec

Material	terminal body aluminum	**A**	S184 p.12-181, Table 12-299; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.TA1600RD (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.TA1600RD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.2 in, height 4.8 in, width 4.2 in, weight 3.15 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00532	TA2000RD	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series C R-frame line/load terminal, 2000 A, Cu/Al

OEM part number	TA2000RD	**A**	S184, S251 p.12-181, Table 12-299; oem_spec
Alternate / superseded numbers	UPC 786679565001	**A**	S251 alias; skuPage.TA2000RD (General/Product specifications); oem_spec
Description	Includes bus connection, terminals and hardware for either line or load side of 3-pole breaker	**A**	S184 p.12-181, Table 12-299; oem_spec
	Eaton molded case circuit breaker accessory terminal, Line and load terminals, 2000 A, (6) #2 AWG-600 kcmil, R-Frame, Frame J-K, Series G	**A**	S251 skuPage.TA2000RD (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-181, Table 12-299; oem_spec
Breaker compatibility	R-frame RD/RDC	**A**	same as above
	R-frame (Eaton web 'Used with' attribute)	**A**	S251 skuPage.TA2000RD (General/Product specifications); oem_spec
Breaker frame	Frame J-K	**A**	same as above
Current rating	2000 A max breaker	**A**	S184 p.12-181, Table 12-299; oem_spec
	2000 A	**A**	S251 skuPage.TA2000RD (General/Product specifications); oem_spec
Kit contents	one side (line or load) of 3-pole breaker	**A**	S184 p.12-181, Table 12-299; oem_spec
Wire range	(6) 2-600 kcmil (35-300 mm2)	**A**	same as above
	(6) #2 AWG-600 kcmil	**A**	S251 skuPage.TA2000RD (General/Product specifications); oem_spec
Material	terminal body aluminum	**A**	S184 p.12-181, Table 12-299; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.TA2000RD (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.TA2000RD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 12.5 in, height 6.75 in, width 7 in, weight 26.02 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00533	**B2016RD**	Series C R-frame copper rear connector	R-frame RD/RDC **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00534	**B2016RDL**	Series C R-frame copper rear connector	R-frame RD/RDC **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00535	**B2500RD**	Series C R-frame copper rear connector	R-frame RD/RDC **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00533 B2016RD — Eaton / Cutler-Hammer — breaker-accessory — ACTIVE EATON PRODUCT P

Series C R-frame copper rear connector

OEM part number	B2016RD	**A**	S184, S251 p.12-181, Table 12-299; oem_spec
Alternate / superseded numbers	UPC 786679161173	**A**	S251 alias; skuPage.B2016RD (General/Product specifications); oem_spec
Description	Rear connector (Cu), for 1600 A and 2000 A frames	**A**	S184 p.12-181, Table 12-299; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 2000 A, R-Frame, Series G	**A**	S251 skuPage.B2016RD (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-181, Table 12-299; oem_spec
Installation location	rear connection, line or load	**A**	same as above
Breaker compatibility	R-frame RD/RDC	**A**	same as above
	R-frame (Eaton web 'Used with' attribute)	**A**	S251 skuPage.B2016RD (General/Product specifications); oem_spec
Current rating	2000 A	**A**	same as above
Material	copper	**A**	S184 p.12-181, Table 12-299; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.B2016RD (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.B2016RD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.4 in, height 2.5 in, width 2.7 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00534 B2016RDL — Eaton / Cutler-Hammer — breaker-accessory — ACTIVE EATON PRODUCT P

Series C R-frame copper rear connector

OEM part number	B2016RDL	**A**	S184, S251 p.12-181, Table 12-299; oem_spec
Alternate / superseded numbers	UPC 786679225622	**A**	S251 alias; skuPage.B2016RDL (General/Product specifications); oem_spec
Description	Rear connector (Cu) for 100% rated 1600 A and 2000 A frame; included in breaker carton when 100% rated device ordered	**A**	S184 p.12-181, Table 12-299; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, Imperial hardware, 2000 A, R-Frame, Frame J-K, Series G, Line and load, Copper	**A**	S251 skuPage.B2016RDL (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-181, Table 12-299; oem_spec
Installation location	rear connection, line or load	**A**	same as above

Breaker compatibility	R-frame RD/RDC	A	same as above
	R-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.B2016RDL (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	2000 A	A	same as above
Kit contents	Imperial hardware (Eaton web 'Special features' attribute)	A	same as above
Material	copper	A	S184 p.12-181, Table 12-299; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.B2016RDL (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.B2016RDL (General/Product specifications); oem_spec
Installation requirements	For use with 100% rated 1600A and 2000A frame. Do not order separately unless for replacement purposes. Included in breaker carton when 100% rated device is ordered. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 8.4 in, height 2.5 in, width 2.7 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00535 **B2500RD** Eaton / Cutler-Hammer breaker-accessory **ACTIVE EATON PRODUCT P**

Series C R-frame copper rear connector

OEM part number	B2500RD	A	S184, S251 p.12-181, Table 12-299; oem_spec
Alternate / superseded numbers	UPC 786679565056	A	S251 alias; skuPage.B2500RD (General/Product specifications); oem_spec
Description	Rear connector (Cu) for 2500 A frame; included in breaker carton with 2500 A breaker	A	S184 p.12-181, Table 12-299; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 2500 A, R-Frame, Frame J-K, Series G	A	S251 skuPage.B2500RD (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-181, Table 12-299; oem_spec
Installation location	rear connection, line or load	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
	R-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.B2500RD (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	2500 A	A	same as above
Material	copper	A	S184 p.12-181, Table 12-299; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.B2500RD (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.B2500RD (General/Product specifications); oem_spec
Installation requirements	For use with 2500A frame. Do not order separately unless for replacement purposes. Included in breaker carton when 2500A breaker is ordered. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 13 in, height 2 in, width 2 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker family Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00536	**3T125EF**	Series G EG-frame line/load terminals, 125 A, Cu	EG-frame **A**	unknown
EDH-EAT-00577	**3TA125E3K**	Series G EG-frame multiwire connector	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00578	**3TA125E6K**	Series G EG-frame multiwire connector	EG-frame **A**	unknown
EDH-EAT-00537	**3TA125EF**	Series G EG-frame line/load terminals, 125 A, Cu/Al	EG-frame (EGB/EGE/EGS/EGH); 3TA125EF also EGEDC/EGSDC/EGHDC DC breaker **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00538	**3TA150EF**	Series G EG-frame line/load terminals, 125/160 A, Cu/Al	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00539	**3TA160EFK**	Series G EG-frame line/load terminals, 160 A, Cu/Al	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00540	**4TA160EFK**	Series G EG-frame line/load terminals, 160 A, Cu/Al	EG-frame **A**	unknown

EDH-EAT-00536 **3T125EF** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series G EG-frame line/load terminals, 125 A, Cu

OEM part number	3T125EF	**A**	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Description	Pressure type line/load terminal; Standard line and load terminals	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Current rating	125 A max breaker	**A**	same as above
Kit contents	package of 3	**A**	same as above
Wire range	#14-3/0 AWG Cu (2.5-95 mm2); 2014 also lists #12-10 Al (4-6 mm2)	**A**	same as above
Material	terminal body steel	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00577 **3TA125E3K** Eaton lug-kit **ACTIVE EATON PRODUCT P**

Series G EG-frame multiwire connector

OEM part number	3TA125E3K	**A**	S187, S251 V4-T2-25; oem_spec
Alternate / superseded numbers	UPC 782116125456	**A**	S251 alias; skuPage.3TA125E3K (General/Product specifications); oem_spec
Description	EG-frame multiwire connector, 3 wires per terminal, 14-2 AWG Cu, 125 A	**A**	S187 V4-T2-25; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Multiwire Connectors, 125 A, #14-2 AWG, EG-Frame, Frame J-K, Series G, Three-wire	**A**	S251 skuPage.3TA125E3K (General/Product specifications); oem_spec
Application	accessory	**A**	S187 V4-T2-25; oem_spec
Installation location	load (OFF) end	**A**	same as above
Breaker compatibility	EG-frame	**A**	S187, S251 V4-T2-25; oem_spec
Breaker frame	Frame J-K	**A**	S251 skuPage.3TA125E3K (General/Product specifications); oem_spec
Current rating	125 A	**A**	same as above
Kit contents	package of 3 (load side)	**A**	S187 V4-T2-25; oem_spec

Wire range	#14-2 AWG	A	S251 skuPage.3TA125E3K (General/Product specifications); oem_spec
Material	tin-plated aluminum connectors	A	S187 V4-T2-25; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA125E3K (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.3TA125E3K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7 in, height 3 in, width 9 in, weight 0.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00578 **3TA125E6K** Eaton lug-kit **STATUS UNKNOWN**

Series G EG-frame multiwire connector

OEM part number	3TA125E6K	A	S187 V4-T2-25; oem_spec
Description	EG-frame multiwire connector, 6 wires per terminal, 14-6 AWG Cu, 125 A	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	EG-frame	A	same as above
Kit contents	package of 3 (load side)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00537 **3TA125EF** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series G EG-frame line/load terminals, 125 A, Cu/Al

OEM part number	3TA125EF	A	S187, S251 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Alternate / superseded numbers	UPC 782114983669	A	S251 alias; skuPage.3TA125EF (General/Product specifications); oem_spec
Description	Pressure type line/load terminal; Standard 15-50 A EG	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Terminal kit, 125 A, Three-pole, #14-1/0 AWG, EG-Frame, Frame J-K, Series G, Copper/aluminum	A	S251 skuPage.3TA125EF (General/Product specifications); oem_spec
Application	accessory	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Breaker compatibility	EG-frame (EGB/EGE/EGS/EGH); 3TA125EF also EGEDC/EGSDC/EGHDC DC breakers	A	same as above
	EG-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.3TA125EF (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Poles	3 (Eaton web: Three-pole)	A	same as above
Current rating	125 A max breaker	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
	125 A	A	S251 skuPage.3TA125EF (General/Product specifications); oem_spec

Kit contents	package of 3	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Wire range	#14-1/0 AWG (2.5-50 mm2)	A	same as above
	#14-1/0 AWG	A	S251 skuPage.3TA125EF (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA125EF (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.3TA125EF (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4.5 in, height 0.5 in, width 6 in, weight 0.05 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00538 3TA150EF Eaton / Cutler-Hammer lug-kit ACTIVE EATON PRODUCT P

Series G EG-frame line/load terminals, 125/160 A, Cu/Al

OEM part number	3TA150EF	A	S187, S251 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Alternate / superseded numbers	UPC 782113683911	A	S251 alias; skuPage.3TA150EF (General/Product specifications); oem_spec
Description	Pressure type line/load terminal; Standard 60-125 A EG	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Terminal kit, 160 A, Three-pole, #6-3/0 AWG, EG-Frame, Frame J-K, Copper/aluminum	A	S251 skuPage.3TA150EF (General/Product specifications); oem_spec
Application	accessory	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Breaker compatibility	EG-frame	A	S187, S251 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Breaker frame	Frame J-K	A	S251 skuPage.3TA150EF (General/Product specifications); oem_spec
Poles	3 (Eaton web: Three-pole)	A	same as above
Current rating	125/160 A max breaker	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
	160 A	A	S251 skuPage.3TA150EF (General/Product specifications); oem_spec
Kit contents	package of 3	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Wire range	#6-3/0 AWG (16-70 mm2 per 2014; 16-95 mm2 per 2008)	A	same as above
	#6-3/0 AWG	A	S251 skuPage.3TA150EF (General/Product specifications); oem_spec

Material	terminal body aluminum	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA150EF (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.3TA150EF (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4.7 in, height 1.5 in, width 1.7 in, weight 0.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Metric range conflict: 16-70 mm2 (2014) vs 16-95 mm2 (2008).*		

EDH-EAT-00539 **3TA160EFK** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series G EG-frame line/load terminals, 160 A, Cu/Al

OEM part number	3TA160EFK	A	S187, S251 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Alternate / superseded numbers	UPC 782116102495	A	S251 alias; skuPage.3TA160EFK (General/Product specifications); oem_spec
Description	Pressure type line/load terminal	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Terminal kit, 160 A, Three-pole, #3 AWG-250 kcmil, Copper/aluminum	A	S251 skuPage.3TA160EFK (General/Product specifications); oem_spec
Application	accessory	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Breaker compatibility	EG-frame	A	same as above
Poles	3 (Eaton web: Three-pole)	A	S251 skuPage.3TA160EFK (General/Product specifications); oem_spec
Current rating	160 A max breaker	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
	160 A	A	S251 skuPage.3TA160EFK (General/Product specifications); oem_spec
Kit contents	package of 3	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Wire range	#3-250 kcmil (35-120 mm2)	A	same as above
	#3 AWG-250 kcmil	A	S251 skuPage.3TA160EFK (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA160EFK (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.3TA160EFK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 0.01 in, height 10 in, width 12 in, weight 2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above

Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00540	4TA160EFK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G EG-frame line/load terminals, 160 A, Cu/Al

OEM part number	4TA160EFK	**A**	S187 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Description	Pressure type line/load terminal	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Current rating	160 A max breaker	**A**	same as above
Kit contents	4-pole kit with four terminals	**A**	same as above
Wire range	#3-250 kcmil (35-120 mm2)	**A**	same as above
Material	terminal body aluminum	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00573	**EEC3K**	Series G EG-frame terminal end cover (gas barrier) 0.25 in conductor opening	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00574	**EEC4K**	Series G EG-frame terminal end cover (gas barrier) 0.41 in conductor opening	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00570	**EFTS3K**	Series G EG-frame terminal shield IP30 3-pole (line terminal area)	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00571	**EFTS4K**	Series G EG-frame terminal shield IP30 4-pole	EG-frame **A**	unknown
EDH-EAT-00572	**EIPBK**	Series G EG-frame interphase barriers (package of 12 priced individually)	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00573	EEC3K	Eaton	barrier	ACTIVE EATON PRODUCT P

Series G EG-frame terminal end cover (gas barrier) 0.25 in conductor opening

OEM part number	EEC3K	A	S187, S251 V4-T2-25; oem_spec
Alternate / superseded numbers	UPC 786679117477	A	S251 alias; skuPage.EEC3K (General/Product specifications); oem_spec
Description	EG-frame terminal end cover (gas barrier), 0.25 in conductor opening	A	S187 V4-T2-25; oem_spec
	Eaton molded case circuit breaker accessory cover, Terminal end cover, 3 Gauge, Frame J-K	A	S251 skuPage.EEC3K (General/Product specifications); oem_spec
Application	accessory	A	S187 V4-T2-25; oem_spec
Breaker compatibility	EG-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.EEC3K (General/Product specifications); oem_spec
Kit contents	3 Gauge (Eaton web 'Special features' attribute)	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	UL Listed	A	S251 skuPage.EEC3K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3 in, height 0.5 in, width 3.5 in, weight 0.02 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*V4-T2-25 prints '6.35 (0.25)' and '10.41 (0.41)' with inch/mm swapped; for use with steel/stainless standard terminals only?*		

EDH-EAT-00574	EEC4K	Eaton	barrier	ACTIVE EATON PRODUCT P

Series G EG-frame terminal end cover (gas barrier) 0.41 in conductor opening

OEM part number	EEC4K	A	S187, S251 V4-T2-25; oem_spec
Alternate / superseded numbers	UPC 786679117484	A	S251 alias; skuPage.EEC4K (General/Product specifications); oem_spec
Description	EG-frame terminal end cover (gas barrier), 0.41 in conductor opening	A	S187 V4-T2-25; oem_spec
	Eaton molded case circuit breaker accessory cover, Terminal end cover	A	S251 skuPage.EEC4K (General/Product specifications); oem_spec
Application	accessory	A	S187 V4-T2-25; oem_spec
Breaker compatibility	EG-frame	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.EEC4K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.EEC4K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.3 in, height 1.5 in, width 1.5 in, weight 0.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00570	EFTS3K	Eaton	barrier	ACTIVE EATON PRODUCT P

Series G EG-frame terminal shield IP30 3-pole (line terminal area)

OEM part number	EFTS3K	A	S187, S251 V4-T2-25; oem_spec
Alternate / superseded numbers	UPC 782114984185	A	S251 alias; skuPage.EFTS3K (General/Product specifications); oem_spec
Description	EG-frame terminal shield IP30, 3-pole (line terminal area)	A	S187 V4-T2-25; oem_spec
	Eaton molded case circuit breaker accessory terminal shield, Terminal shield, three-pole, Three-pole, EG-Frame, Frame J-K, Series G	A	S251 skuPage.EFTS3K (General/Product specifications); oem_spec
Application	accessory	A	S187 V4-T2-25; oem_spec
Breaker compatibility	EG-frame	A	S187, S251 V4-T2-25; oem_spec
Breaker frame	Frame J-K	A	S251 skuPage.EFTS3K (General/Product specifications); oem_spec
Poles	3 (Eaton web: Three-pole)	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	Contact Manufacturer	A	S251 skuPage.EFTS3K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5 in, height 3 in, width 4 in, weight 0.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00571	EFTS4K	Eaton	barrier	STATUS UNKNOWN

Series G EG-frame terminal shield IP30 4-pole

OEM part number	EFTS4K	A	S187 V4-T2-25; oem_spec
Description	EG-frame terminal shield IP30, 4-pole	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00572	EIPBK	Eaton	barrier	ACTIVE EATON PRODUCT P

Series G EG-frame interphase barriers (package of 12 priced individually)

OEM part number	EIPBK	**A**	S187, S251 V4-T2-25; oem_spec
Alternate / superseded numbers	UPC 786679108147	**A**	S251 alias; skuPage.EIPBK (General/Product specifications); oem_spec
Description	EG-frame interphase barriers (package of 12, priced individually)	**A**	S187 V4-T2-25; oem_spec
	Eaton molded case circuit breaker accessory thermal magnetic trip, Interphase barriers, HMCPE, Q7, Frame J-K, Series G	**A**	S251 skuPage.EIPBK (General/Product specifications); oem_spec
Application	accessory	**A**	S187 V4-T2-25; oem_spec
Breaker compatibility	EG-frame	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.EIPBK (General/Product specifications); oem_spec
Kit contents	HMCPE (Eaton web 'Special features' attribute)	**A**	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	same as above
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.EIPBK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5 in, height 1 in, width 4 in, weight 0.03 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00576	**5652B38G01**	Series G Series G / G-frame control wire terminal kit (package of 12); for steel or stainless standard terminals only	EG-frame **A**	unknown
EDH-EAT-00584	**EF2RTDK**	Series G EG end cap kit, 2-pole, imperial	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00581	**EF2RTWK**	Series G EG end cap kit, 2-pole, metric	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00585	**EF3RTDK**	Series G EG end cap kit, 3-pole, imperial	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00582	**EF3RTWK**	Series G EG end cap kit, 3-pole, metric	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00586	**EF4RTDK**	Series G EG end cap kit, 4-pole, imperial	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00583	**EF4RTWK**	Series G EG end cap kit, 4-pole, metric	EG-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00576	5652B38G01	Eaton	breaker-accessory	STATUS UNKNOWN

Series G Series G / G-frame control wire terminal kit (package of 12); for steel or stainless standard terminals only

OEM part number	5652B38G01	A	S187 V4-T2-25; p.12-244 Table 12-452; oem_spec
Alternate / superseded numbers	GCWTK (Table 12-452 (Series C G-frame control wire terminal, kit of 12) prints both 5652B38G01 and GCWTK; KM reproduction 'GCWTK (also 5652B38G01)'; EG table V4-T2-25 uses 5652B38G01)	A	S184 alias; p.12-244 Table 12-452; oem_spec
Description	Series G / G-frame control wire terminal kit (package of 12); for steel or stainless standard terminals only	A	S187 V4-T2-25; p.12-244 Table 12-452; oem_spec
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Kit contents	package of 12	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC), Series C G-Frame (GD/GHC/GHB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00584	EF2RTDK	Eaton	breaker-accessory	ACTIVE EATON PRODUCT P

Series G EG end cap kit, 2-pole, imperial

OEM part number	EF2RTDK	A	S187, S251 V4-T2-24; oem_spec
Alternate / superseded numbers	UPC 786685220024	A	S251 alias; skuPage.EF2RTDK (General/Product specifications); oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	A	S187 V4-T2-24; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Imperial end cap kit, Two-pole, EG-Frame, Frame J-K, Series G	A	S251 skuPage.EF2RTDK (General/Product specifications); oem_spec
Application	accessory	A	S187 V4-T2-24; oem_spec
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	S187, S251 V4-T2-24; oem_spec
Breaker frame	Frame J-K	A	S251 skuPage.EF2RTDK (General/Product specifications); oem_spec
Poles	2	A	S187, S251 V4-T2-24; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.EF2RTDK (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.EF2RTDK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 1 in, width 1 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00581	EF2RTWK	Eaton	breaker-accessory	ACTIVE EATON PRODUCT P

Series G EG end cap kit, 2-pole, metric

OEM part number	EF2RTWK	A	S187, S251 V4-T2-24; oem_spec
Alternate / superseded numbers	UPC 786685220000	A	S251 alias; skuPage.EF2RTWK (General/Product specifications); oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	A	S187 V4-T2-24; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Metric end cap kit, Two-pole, EG-Frame, Frame J-K, Series G	A	S251 skuPage.EF2RTWK (General/Product specifications); oem_spec
Application	accessory	A	S187 V4-T2-24; oem_spec
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	S187, S251 V4-T2-24; oem_spec
Breaker frame	Frame J-K	A	S251 skuPage.EF2RTWK (General/Product specifications); oem_spec
Poles	2	A	S187, S251 V4-T2-24; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.EF2RTWK (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.EF2RTWK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2 in, height 1 in, width 1 in, weight 0.05 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00585	EF3RTDK	Eaton	breaker-accessory	ACTIVE EATON PRODUCT P

Series G EG end cap kit, 3-pole, imperial

OEM part number	EF3RTDK	A	S187, S251 V4-T2-24; oem_spec
Alternate / superseded numbers	UPC 786679108017	A	S251 alias; skuPage.EF3RTDK (General/Product specifications); oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	A	S187 V4-T2-24; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Imperial end cap kit, Three-pole, EG-Frame, Series G	A	S251 skuPage.EF3RTDK (General/Product specifications); oem_spec
Application	accessory	A	S187 V4-T2-24; oem_spec
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	S187, S251 V4-T2-24; oem_spec
Poles	3	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.EF3RTDK (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.EF3RTDK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7 in, height 1.5 in, width 5 in, weight 0.08 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00582	EF3RTWK	Eaton	breaker-accessory	ACTIVE EATON PRODUCT P

Series G EG end cap kit, 3-pole, metric

OEM part number	EF3RTWK	A	S187, S251 V4-T2-24; oem_spec
Alternate / superseded numbers	UPC 786679108031	A	S251 alias; skuPage.EF3RTWK (General/Product specifications); oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	A	S187 V4-T2-24; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Metric end cap kit, CH End cap, Three-pole, EG-Frame, Frame J-K, Series G	A	S251 skuPage.EF3RTWK (General/Product specifications); oem_spec
Application	accessory	A	S187 V4-T2-24; oem_spec
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	S187, S251 V4-T2-24; oem_spec
Breaker frame	Frame J-K	A	S251 skuPage.EF3RTWK (General/Product specifications); oem_spec
Poles	3	A	S187, S251 V4-T2-24; oem_spec
Kit contents	CH End cap (Eaton web 'Special features' attribute)	A	S251 skuPage.EF3RTWK (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	Contact Manufacturer	A	S251 skuPage.EF3RTWK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4 in, height 1 in, width 5 in, weight 0.02 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00586	EF4RTDK	Eaton	breaker-accessory	ACTIVE EATON PRODUCT P
Series G EG end cap kit, 4-pole, imperial				
OEM part number	EF4RTDK	**A**	S187, S251 V4-T2-24; oem_spec	
Alternate / superseded numbers	UPC 782113683881	**A**	S251 alias; skuPage.EF4RTDK (General/Product specifications); oem_spec	
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	**A**	S187 V4-T2-24; oem_spec	
	Eaton molded case circuit breaker accessory end cap kit, Imperial end cap kit, Four-pole, EG-Frame, Frame J-K	**A**	S251 skuPage.EF4RTDK (General/Product specifications); oem_spec	
Application	accessory	**A**	S187 V4-T2-24; oem_spec	
Installation location	line side terminal	**A**	same as above	
Breaker compatibility	EG-frame	**A**	S187, S251 V4-T2-24; oem_spec	
Breaker frame	Frame J-K	**A**	S251 skuPage.EF4RTDK (General/Product specifications); oem_spec	
Poles	4	**A**	S187, S251 V4-T2-24; oem_spec	
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.EF4RTDK (General/Product specifications); oem_spec	
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.EF4RTDK (General/Product specifications); oem_spec	
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 1 in, width 1 in, weight 1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above	
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)			
Not yet documented	Dimensions, OEM instruction document, Torque values			

EDH-EAT-00583	EF4RTWK	Eaton	breaker-accessory	ACTIVE EATON PRODUCT P

Series G EG end cap kit, 4-pole, metric

OEM part number	EF4RTWK	**A**	S187, S251 V4-T2-24; oem_spec
Alternate / superseded numbers	UPC 782113683874	**A**	S251 alias; skuPage.EF4RTWK (General/Product specifications); oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	**A**	S187 V4-T2-24; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, Metric end cap kit, Four-pole, EG-Frame, Frame J-K	**A**	S251 skuPage.EF4RTWK (General/Product specifications); oem_spec
Application	accessory	**A**	S187 V4-T2-24; oem_spec
Installation location	line side terminal	**A**	same as above
Breaker compatibility	EG-frame	**A**	S187, S251 V4-T2-24; oem_spec
Breaker frame	Frame J-K	**A**	S251 skuPage.EF4RTWK (General/Product specifications); oem_spec
Poles	4	**A**	S187, S251 V4-T2-24; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.EF4RTWK (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.EF4RTWK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 2.8 in, width 3.2 in, weight 0.15 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker family Series G JG-Frame (JGE/JGS/JGH/JGC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00579	**3TA250FJ3**	Series G JG-frame multiwire connector	JG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00580	**3TA250FJ6**	Series G JG-frame multiwire connector	JG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00541	**T250FJ**	Series G JG-frame line/load terminal, 250 A, Cu (standard)	JG-frame; also JGEDC/JGSDC/JGHDC 250 A DC (s7) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00542	**TA250FJ**	Series G JG-frame line/load terminal, 250 A, Cu/Al	JG-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00579	3TA250FJ3	Eaton	lug-kit	ACTIVE EATON PRODUCT P

Series G JG-frame multiwire connector

OEM part number	3TA250FJ3	**A**	S184, S251 p.12-28, Table 12-39; oem_spec
Alternate / superseded numbers	UPC 782116130887	**A**	S251 alias; skuPage.3TA250FJ3 (General/Product specifications); oem_spec
Description	JG-frame multiwire connector, 3 wires per terminal, 14-2 AWG Cu, 250 A	**A**	S184 p.12-28, Table 12-39; oem_spec

	Eaton molded case circuit breaker accessory line and load terminal, Multiwire terminal connectors kit, 250 A, #14-2 AWG, JG-Frame, Frame J-K, Series G, Three-wire	A	S251 skuPage.3TA250FJ3 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-28, Table 12-39; oem_spec
Installation location	load (OFF) end	A	same as above
Breaker compatibility	JG-frame	A	S184, S251 p.12-28, Table 12-39; oem_spec
Breaker frame	Frame J-K	A	S251 skuPage.3TA250FJ3 (General/Product specifications); oem_spec
Current rating	250 A	A	same as above
Kit contents	package of 3 (load side)	A	S184 p.12-28, Table 12-39; oem_spec
Wire range	#14-2 AWG	A	S251 skuPage.3TA250FJ3 (General/Product specifications); oem_spec
Material	tin-plated aluminum connectors	A	S184 p.12-28, Table 12-39; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA250FJ3 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.3TA250FJ3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.75 in, height 5.5 in, width 4.25 in, weight 0.8 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00580	3TA250FJ6	Eaton	lug-kit	ACTIVE EATON PRODUCT P

Series G JG-frame multiwire connector

OEM part number	3TA250FJ6	A	S184, S251 p.12-28, Table 12-39; oem_spec
Alternate / superseded numbers	UPC 782116130894	A	S251 alias; skuPage.3TA250FJ6 (General/Product specifications); oem_spec
Description	JG-frame multiwire connector, 6 wires per terminal, 14-6 AWG Cu, 250 A	A	S184 p.12-28, Table 12-39; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Multiwire terminal connectors kit, 250 A, #14-6 AWG, JG-Frame, Frame J-K, Series G, Six-wire	A	S251 skuPage.3TA250FJ6 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-28, Table 12-39; oem_spec
Installation location	load (OFF) end	A	same as above
Breaker compatibility	JG-frame	A	S184, S251 p.12-28, Table 12-39; oem_spec
Breaker frame	Frame J-K	A	S251 skuPage.3TA250FJ6 (General/Product specifications); oem_spec
Current rating	250 A	A	same as above
Kit contents	package of 3 (load side)	A	S184 p.12-28, Table 12-39; oem_spec
Wire range	#14-6 AWG	A	S251 skuPage.3TA250FJ6 (General/Product specifications); oem_spec

Material	tin-plated aluminum connectors	A	S184 p.12-28, Table 12-39; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA250FJ6 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.3TA250FJ6 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7.7 in, height 4.8 in, width 4.9 in, weight 0.87 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00541 **T250FJ** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series G JG-frame line/load terminal, 250 A, Cu (standard)

OEM part number	T250FJ	A	S184, S251 p.12-28, Table 12-36; oem_spec
Alternate / superseded numbers	UPC 786685466910	A	S251 alias; skuPage.T250FJ (General/Product specifications); oem_spec
Description	Standard pressure type terminal (standard line and load); individually packed	A	S184 p.12-28, Table 12-36; oem_spec
	Eaton molded case circuit breaker accessory hardware, Stainless steel collar assembly, JG-Frame, Frame J-K, Series G	A	S251 skuPage.T250FJ (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-28, Table 12-36; oem_spec
Breaker compatibility	JG-frame; also JGEDC/JGSDC/JGHDC 250 A DC (s7)	A	same as above
	JG-frame (Eaton web 'Used with' attribute)	A	S251 skuPage.T250FJ (General/Product specifications); oem_spec
Breaker frame	Frame J-K	A	same as above
Current rating	250 A	A	S184 p.12-28, Table 12-36; oem_spec
Kit contents	1 terminal	A	same as above
	Used with JG-frame (Eaton web 'Special features' attribute)	A	S251 skuPage.T250FJ (General/Product specifications); oem_spec
Wire range	#4-350 kcmil (25-185 mm2) Cu	A	S184 p.12-28, Table 12-36; oem_spec
Material	stainless steel body	A	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.T250FJ (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.T250FJ (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 0.5 in, width 2.5 in, weight 0.15 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00542 **TA250FJ** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series G JG-frame line/load terminal, 250 A, Cu/Al

OEM part number	TA250FJ	A	S184, S251 p.12-28, Table 12-36; oem_spec

Alternate / superseded numbers	UPC 782113924762	**A**	S251 alias; skuPage.TA250FJ (General/Product specifications); oem_spec
Description	Pressure type Cu/Al terminal (contact factory for availability per footnote)	**A**	S184 p.12-28, Table 12-36; oem_spec
	Eaton molded case circuit breaker accessory terminal, Line and load terminals, 250 A, #8 AWG-350 kcmil, JG-Frame, Frame J-K, Series C	**A**	S251 skuPage.TA250FJ (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-28, Table 12-36; oem_spec
Breaker compatibility	JG-frame	**A**	S184, S251 p.12-28, Table 12-36; oem_spec
Breaker frame	Frame J-K	**A**	S251 skuPage.TA250FJ (General/Product specifications); oem_spec
Current rating	250 A	**A**	S184, S251 p.12-28, Table 12-36; oem_spec
Kit contents	1 terminal	**A**	S184 p.12-28, Table 12-36; oem_spec
Wire range	#4-350 kcmil (25-185 mm2) Cu/Al	**A**	same as above
	#8 AWG-350 kcmil	**A**	S251 skuPage.TA250FJ (General/Product specifications); oem_spec
Material	aluminum body	**A**	S184 p.12-28, Table 12-36; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.TA250FJ (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.TA250FJ (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 4.5 in, height 1 in, width 5.5 in, weight 0.02 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Footnote 'Contact factory for availability' attaches to which JG terminal?*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00568	**FJIPBK**	Series G JG-frame interphase barriers 3-pole (package of 2)	JG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00569	**FJIPBK4**	Series G JG-frame interphase barriers 4-pole (package of 2)	JG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00566	**FJTS3K**	Series G JG-frame terminal shield IP30 2/3-pole	JG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00567	**FJTS4K**	Series G JG-frame terminal shield IP30 4-pole	JG-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00568	FJIPBK	Eaton	barrier		ACTIVE EATON PRODUCT P
Series G JG-frame interphase barriers 3-pole (package of 2)					
OEM part number	FJIPBK			**A**	S184, S251 p.12-28, Table 12-41; oem_spec
Alternate / superseded numbers	UPC 782113527406			**A**	S251 alias; skuPage.FJIPBK (General/Product specifications); oem_spec
Description	JG-frame interphase barriers, 3-pole (package of 2)			**A**	S184 p.12-28, Table 12-41; oem_spec
	Eaton molded case circuit breaker accessory barrier kit accessory, Interphase barrier kit, Three-pole, JG-Frame, Frame J-K, Series G			**A**	S251 skuPage.FJIPBK (General/Product specifications); oem_spec
Application	accessory			**A**	S184 p.12-28, Table 12-41; oem_spec
Breaker compatibility	JG-frame			**A**	S184, S251 p.12-28, Table 12-41; oem_spec
Breaker frame	Frame J-K			**A**	S251 skuPage.FJIPBK (General/Product specifications); oem_spec
Poles	3 (Eaton web: Three-pole)			**A**	same as above
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)			**A**	same as above
Listing / approvals	Contact Manufacturer			**A**	S251 skuPage.FJIPBK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5 in, height 0.02 in, width 6 in, weight 0.03 lb (Package/shipping data per Eaton web; NOT verified component dimensions)			**A**	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)				
Not yet documented	Dimensions, OEM instruction document, Torque values				

EDH-EAT-00569	FJIPBK4	Eaton	barrier	ACTIVE EATON PRODUCT P
Series G JG-frame interphase barriers 4-pole (package of 2)				
OEM part number	FJIPBK4	**A**	S184, S251 p.12-28, Table 12-41; oem_spec	
Alternate / superseded numbers	UPC 782113527413	**A**	S251 alias; skuPage.FJIPBK4 (General/Product specifications); oem_spec	
Description	JG-frame interphase barriers, 4-pole (package of 2)	**A**	S184 p.12-28, Table 12-41; oem_spec	
	Eaton molded case circuit breaker accessory barrier kit accessory, Interphase barrier kit, Four-pole, JG-Frame, Frame J-K	**A**	S251 skuPage.FJIPBK4 (General/Product specifications); oem_spec	
Application	accessory	**A**	S184 p.12-28, Table 12-41; oem_spec	
Breaker compatibility	JG-frame	**A**	S184, S251 p.12-28, Table 12-41; oem_spec	
Breaker frame	Frame J-K	**A**	S251 skuPage.FJIPBK4 (General/Product specifications); oem_spec	
Poles	4 (Eaton web: Four-pole)	**A**	same as above	
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	same as above	
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.FJIPBK4 (General/Product specifications); oem_spec	
Package data (not part dims)	Eaton logistics attributes: length/depth 5 in, height 1 in, width 7 in, weight 0.22 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above	
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)			
Not yet documented	Dimensions, OEM instruction document, Torque values			

EDH-EAT-00566	FJTS3K	Eaton	barrier	ACTIVE EATON PRODUCT P
Series G JG-frame terminal shield IP30 2/3-pole				
OEM part number	FJTS3K	**A**	S184, S251 p.12-28, Table 12-40; oem_spec	
Alternate / superseded numbers	UPC 782113928739	**A**	S251 alias; skuPage.FJTS3K (General/Product specifications); oem_spec	
Description	JG-frame terminal shield IP30, 2/3-pole, line or load	**A**	S184 p.12-28, Table 12-40; oem_spec	
	Eaton molded case circuit breakers electrical aftermarket accessory terminal, Terminal Shield, Three-pole, JG-Frame, Frame J-K, Series G	**A**	S251 skuPage.FJTS3K (General/Product specifications); oem_spec	
Application	accessory	**A**	S184 p.12-28, Table 12-40; oem_spec	
Breaker compatibility	JG-frame	**A**	S184, S251 p.12-28, Table 12-40; oem_spec	
Breaker frame	Frame J-K	**A**	S251 skuPage.FJTS3K (General/Product specifications); oem_spec	
Poles	3 (Eaton web: Three-pole)	**A**	same as above	
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	same as above	
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.FJTS3K (General/Product specifications); oem_spec	
Package data (not part dims)	Eaton logistics attributes: length/depth 7.7 in, height 4.8 in, width 4.9 in, weight 0.6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above	
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)			
Not yet documented	Dimensions, OEM instruction document, Torque values			

EDH-EAT-00567	FJTS4K	Eaton	barrier	ACTIVE EATON PRODUCT P

Series G JG-frame terminal shield IP30 4-pole

OEM part number	FJTS4K	**A**	S184, S251 p.12-28, Table 12-40; oem_spec
Alternate / superseded numbers	UPC 782113928746	**A**	S251 alias; skuPage.FJTS4K (General/Product specifications); oem_spec
Description	JG-frame terminal shield IP30, 4-pole, line or load	**A**	S184 p.12-28, Table 12-40; oem_spec
	Eaton molded case circuit breakers electrical aftermarket accessory terminal, Terminal Shield, Four-pole, JG-Frame, Series G	**A**	S251 skuPage.FJTS4K (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-28, Table 12-40; oem_spec
Breaker compatibility	JG-frame	**A**	S184, S251 p.12-28, Table 12-40; oem_spec
Poles	4 (Eaton web: Four-pole)	**A**	S251 skuPage.FJTS4K (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	same as above
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.FJTS4K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7.7 in, height 4.8 in, width 4.9 in, weight 0.6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00589	**FJ3RTDK**	Series G JG end cap kit, 3-pole, imperial	JG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00587	**FJ3RTWK**	Series G JG end cap kit, 3-pole, metric	JG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00590	**FJ4RTDK**	Series G JG end cap kit, 4-pole, imperial	JG-frame **A**	unknown
EDH-EAT-00588	**FJ4RTWK**	Series G JG end cap kit, 4-pole, metric	JG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00575	**FJCWTK**	Series G JG-frame control wire terminal kit (package of 14	JG-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00589	FJ3RTDK	Eaton	breaker-accessory	ACTIVE EATON PRODUCT P
Series G JG end cap kit, 3-pole, imperial				
OEM part number	FJ3RTDK	**A**	S184, S251 p.12-28, Table 12-37; oem_spec	
Alternate / superseded numbers	UPC 782113527369	**A**	S251 alias; skuPage.FJ3RTDK (General/Product specifications); oem_spec	
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	**A**	S184 p.12-28, Table 12-37; oem_spec	
	Eaton molded case circuit breaker accessory motor operator, Imperial end cap kit, Three-pole, JG-Frame, Frame J-K, Series G	**A**	S251 skuPage.FJ3RTDK (General/Product specifications); oem_spec	
Application	accessory	**A**	S184 p.12-28, Table 12-37; oem_spec	
Installation location	line side terminal	**A**	same as above	
Breaker compatibility	JG-frame	**A**	S184, S251 p.12-28, Table 12-37; oem_spec	
Breaker frame	Frame J-K	**A**	S251 skuPage.FJ3RTDK (General/Product specifications); oem_spec	
Poles	3	**A**	S184, S251 p.12-28, Table 12-37; oem_spec	
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.FJ3RTDK (General/Product specifications); oem_spec	
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.FJ3RTDK (General/Product specifications); oem_spec	
Package data (not part dims)	Eaton logistics attributes: length/depth 5 in, height 1 in, width 7 in, weight 0.18 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above	
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)			
Not yet documented	Dimensions, OEM instruction document, Torque values			

EDH-EAT-00587	FJ3RTWK	Eaton	breaker-accessory	ACTIVE EATON PRODUCT P
Series G JG end cap kit, 3-pole, metric				
OEM part number	FJ3RTWK	A	S184, S251 p.12-28, Table 12-37; oem_spec	
Alternate / superseded numbers	UPC 782113527383	A	S251 alias; skuPage.FJ3RTWK (General/Product specifications); oem_spec	
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	A	S184 p.12-28, Table 12-37; oem_spec	
	Eaton molded case circuit breaker accessory motor operator, Metric end cap kit, Three-pole, JG-Frame, Frame J-K, Series G	A	S251 skuPage.FJ3RTWK (General/Product specifications); oem_spec	
Application	accessory	A	S184 p.12-28, Table 12-37; oem_spec	
Installation location	line side terminal	A	same as above	
Breaker compatibility	JG-frame	A	S184, S251 p.12-28, Table 12-37; oem_spec	
Breaker frame	Frame J-K	A	S251 skuPage.FJ3RTWK (General/Product specifications); oem_spec	
Poles	3	A	S184, S251 p.12-28, Table 12-37; oem_spec	
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.FJ3RTWK (General/Product specifications); oem_spec	
Listing / approvals	Contact Manufacturer	A	S251 skuPage.FJ3RTWK (General/Product specifications); oem_spec	
Package data (not part dims)	Eaton logistics attributes: length/depth 2.5 in, height 0.5 in, width 4 in, weight 0.17 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above	
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)			
Not yet documented	Dimensions, OEM instruction document, Torque values			

EDH-EAT-00590	FJ4RTDK	Eaton	breaker-accessory	STATUS UNKNOWN
Series G JG end cap kit, 4-pole, imperial				
OEM part number	FJ4RTDK	A	S184 p.12-28, Table 12-37; oem_spec	
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	A	same as above	
Application	accessory	A	same as above	
Installation location	line side terminal	A	same as above	
Breaker compatibility	JG-frame	A	same as above	
Poles	4	A	same as above	
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)			
Not yet documented	Dimensions, OEM instruction document, Status, Torque values			

EDH-EAT-00588	FJ4RTWK	Eaton	breaker-accessory	ACTIVE EATON PRODUCT P
Series G JG end cap kit, 4-pole, metric				
OEM part number	FJ4RTWK	**A**	S184, S251 p.12-28, Table 12-37; oem_spec	
Alternate / superseded numbers	UPC 782113527390	**A**	S251 alias; skuPage.FJ4RTWK (General/Product specifications); oem_spec	
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	**A**	S184 p.12-28, Table 12-37; oem_spec	
	Eaton molded case circuit breaker accessory motor operator, Metric end cap kit, Four-pole, JG-Frame, Frame J-K, Series G	**A**	S251 skuPage.FJ4RTWK (General/Product specifications); oem_spec	
Application	accessory	**A**	S184 p.12-28, Table 12-37; oem_spec	
Installation location	line side terminal	**A**	same as above	
Breaker compatibility	JG-frame	**A**	S184, S251 p.12-28, Table 12-37; oem_spec	
Breaker frame	Frame J-K	**A**	S251 skuPage.FJ4RTWK (General/Product specifications); oem_spec	
Poles	4	**A**	S184, S251 p.12-28, Table 12-37; oem_spec	
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.FJ4RTWK (General/Product specifications); oem_spec	
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.FJ4RTWK (General/Product specifications); oem_spec	
Package data (not part dims)	Eaton logistics attributes: length/depth 5 in, height 1 in, width 7 in, weight 0.25 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above	
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)			
Not yet documented	Dimensions, OEM instruction document, Torque values			

EDH-EAT-00575	FJCWTK	Eaton	breaker-accessory	ACTIVE EATON PRODUCT P

Series G JG-frame control wire terminal kit (package of 14

OEM part number	FJCWTK	A	S184, S251 p.12-28, Table 12-38; oem_spec
Alternate / superseded numbers	UPC 782116029594	A	S251 alias; skuPage.FJCWTK (General/Product specifications); oem_spec
Description	JG-frame control wire terminal kit (package of 14, priced individually); for Al or Cu terminals	A	S184 p.12-28, Table 12-38; oem_spec
	Eaton molded case circuit breaker accessory motor operator, Control wire terminal kit, Q10, JG-Frame, Frame J-K, Series G	A	S251 skuPage.FJCWTK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-28, Table 12-38; oem_spec
Breaker compatibility	JG-frame	A	S184, S251 p.12-28, Table 12-38; oem_spec
Breaker frame	Frame J-K	A	S251 skuPage.FJCWTK (General/Product specifications); oem_spec
Kit contents	package of 14	A	S184 p.12-28, Table 12-38; oem_spec
	Used with JG-frame (Eaton web 'Special features' attribute)	A	S251 skuPage.FJCWTK (General/Product specifications); oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	same as above
Listing / approvals	Contact Manufacturer	A	S251 skuPage.FJCWTK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1.5 in, height 0.02 in, width 0.5 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker family Series G LG-Frame (LGE/LGS/LGH/LGC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00545	**3T631LK**	Series G LG-frame line/load terminal kit, 400 A, Cu	LG-frame (LGE/LGS/LGH/LGC) A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00549	**3T632LK**	Series G LG-frame line/load terminal kit, 630 A, Cu	LG-frame (LGE/LGS/LGH/LGC) A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00556	**3T632LKW**	Series G LG-frame control wire terminal kit, 3P, copper	LG-frame A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00543	**3TA631LK**	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00547	**3TA632LK**	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00554	**3TA632LKW**	Series G LG-frame control wire terminal kit, 3P, aluminum	LG-frame A	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00546	**4T631LK**	Series G LG-frame line/load terminal kit, 400 A, Cu	LG-frame (LGE/LGS/LGH/LGC) A	unknown
EDH-EAT-00550	**4T632LK**	Series G LG-frame line/load terminal kit, 630 A, Cu	LG-frame (LGE/LGS/LGH/LGC) A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00557	**4T632LKW**	Series G LG-frame control wire terminal kit, 4P, copper	LG-frame **A**	unknown
EDH-EAT-00544	**4TA631LK**	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00548	**4TA632LK**	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00555	**4TA632LKW**	Series G LG-frame control wire terminal kit, 4P, aluminum	LG-frame **A**	unknown
EDH-EAT-00552	**T350LK**	Series G LG-frame line/load terminal, 400 A, Cu	LG-frame (LGE/LGS/LGH/LGC) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00551	**TA350LK**	Series G LG-frame line/load terminal, 400 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00553	**TA632L**	Series G LG-frame single terminal, 630 A, Cu/Al	LGEDC/LGSDC/LGHDC 630 A **A**	unknown

EDH-EAT-00545 **3T631LK** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series G LG-frame line/load terminal kit, 400 A, Cu

OEM part number	3T631LK	**A**	S184, S251 p.12-37, Table 12-60; oem_spec
Alternate / superseded numbers	UPC 782116165612	**A**	S251 alias; skuPage.3T631LK (General/Product specifications); oem_spec
Description	Pressure type Cu terminal for LG-frame	**A**	S184 p.12-37, Table 12-60; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 400 A, 500-750 kcmil Cu, Frame J-K, Series C, Three-terminal	**A**	S251 skuPage.3T631LK (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-37, Table 12-60; oem_spec
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.3T631LK (General/Product specifications); oem_spec
Poles	3	**A**	S184 p.12-37, Table 12-60; oem_spec
Current rating	400 A max breaker	**A**	same as above
	400 A	**A**	S251 skuPage.3T631LK (General/Product specifications); oem_spec
Kit contents	3 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	**A**	S184 p.12-37, Table 12-60; oem_spec
Wire range	500-750 kcmil (1) (240-380 mm2)	**A**	same as above
	500-750 kcmil Cu	**A**	S251 skuPage.3T631LK (General/Product specifications); oem_spec
Material	terminal body copper	**A**	S184 p.12-37, Table 12-60; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.3T631LK (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.3T631LK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7.78 in, height 3 in, width 4.38 in, weight 2.89 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		

Requires	LTS3K (EDH-EAT-00558)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00549	3T632LK	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series G LG-frame line/load terminal kit, 630 A, Cu

OEM part number	3T632LK	A	S184, S251 p.12-37, Table 12-60; oem_spec
Alternate / superseded numbers	UPC 782116165650	A	S251 alias; skuPage.3T632LK (General/Product specifications); oem_spec
Description	Pressure type Cu terminal for LG-frame	A	S184 p.12-37, Table 12-60; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 630 A, #2 AWG-500 kcmil Cu, Frame J-K, Series G, Three-terminal	A	S251 skuPage.3T632LK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-37, Table 12-60; oem_spec
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3T632LK (General/Product specifications); oem_spec
Poles	3	A	S184 p.12-37, Table 12-60; oem_spec
Current rating	630 A max breaker	A	same as above
	630 A	A	S251 skuPage.3T632LK (General/Product specifications); oem_spec
Kit contents	3 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	S184 p.12-37, Table 12-60; oem_spec
Wire range	2 AWG-500 kcmil (2) (35-240 mm2)	A	same as above
	#2 AWG-500 kcmil Cu	A	S251 skuPage.3T632LK (General/Product specifications); oem_spec
Material	terminal body copper	A	S184 p.12-37, Table 12-60; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3T632LK (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3T632LK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7.78 in, height 3 in, width 4.38 in, weight 4.69 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS3K (EDH-EAT-00558)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00556	3T632LKW	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series G LG-frame control wire terminal kit, 3P, copper

OEM part number	3T632LKW	A	S184, S251 p.12-37, Table 12-63; oem_spec
Alternate / superseded numbers	UPC 782116929764	A	S251 alias; skuPage.3T632LKW (General/Product specifications); oem_spec
Description	Control wire terminal kit (terminal body copper)	A	S184 p.12-37, Table 12-63; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Control wire terminal kit, Three-pole, Frame J-K, Two-terminal	A	S251 skuPage.3T632LKW (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-37, Table 12-63; oem_spec
Breaker compatibility	LG-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3T632LKW (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-37, Table 12-63; oem_spec
Material	terminal body copper	A	S184 p.12-37, Table 12-63; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3T632LKW (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3T632LKW (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7.75 in, height 3 in, width 4.5 in, weight 4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values, wire range		

EDH-EAT-00543	3TA631LK	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series G LG-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA631LK	A	S184, S251 p.12-37, Table 12-60; oem_spec
Alternate / superseded numbers	UPC 782116165599	A	S251 alias; skuPage.3TA631LK (General/Product specifications); oem_spec
Description	Pressure type Cu/Al terminal for LG-frame	A	S184 p.12-37, Table 12-60; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 400 A, 500-750 kcmil Cu/Al, Frame J-K, Series C, Three-terminal	A	S251 skuPage.3TA631LK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-37, Table 12-60; oem_spec
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA631LK (General/Product specifications); oem_spec
Poles	3	A	S184 p.12-37, Table 12-60; oem_spec
Current rating	400 A max breaker	A	same as above

	400 A	A	S251 skuPage.3TA631LK (General/Product specifications); oem_spec
Kit contents	3 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	S184 p.12-37, Table 12-60; oem_spec
Wire range	500-750 kcmil (1) (240-380 mm2)	A	same as above
	500-750 kcmil Cu/Al	A	S251 skuPage.3TA631LK (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-37, Table 12-60; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA631LK (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3TA631LK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8 in, height 3.5 in, width 4.5 in, weight 1.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS3K (EDH-EAT-00558)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00547 — 3TA632LK — Eaton / Cutler-Hammer — lug-kit — ACTIVE EATON PRODUCT P

Series G LG-frame line/load terminal kit, 630 A, Cu/Al

OEM part number	3TA632LK	A	S184, S251 p.12-37, Table 12-60; oem_spec
Alternate / superseded numbers	UPC 782116165636	A	S251 alias; skuPage.3TA632LK (General/Product specifications); oem_spec
Description	Pressure type Cu/Al terminal for LG-frame; standard on LGHDC 500-600 A	A	S184 p.12-37, Table 12-60; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 630 A, #2 AWG-500 kcmil Cu/Al, Frame J-K, Series G, Three-terminal	A	S251 skuPage.3TA632LK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-37, Table 12-60; oem_spec
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA632LK (General/Product specifications); oem_spec
Poles	3	A	S184 p.12-37, Table 12-60; oem_spec
Current rating	630 A max breaker	A	same as above
	630 A	A	S251 skuPage.3TA632LK (General/Product specifications); oem_spec
Kit contents	3 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	S184 p.12-37, Table 12-60; oem_spec
Wire range	2 AWG-500 kcmil (2) (35-240 mm2)	A	same as above
	#2 AWG-500 kcmil Cu/Al	A	S251 skuPage.3TA632LK (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-37, Table 12-60; oem_spec

Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA632LK (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3TA632LK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8 in, height 3.5 in, width 4.5 in, weight 1.7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS3K (EDH-EAT-00558)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00554 **3TA632LKW** Eaton / Cutler-Hammer lug-kit **ACTIVE EATON PRODUCT P**

Series G LG-frame control wire terminal kit, 3P, aluminum

OEM part number	3TA632LKW	A	S184, S251 p.12-37, Table 12-63; oem_spec
Alternate / superseded numbers	UPC 782116929740	A	S251 alias; skuPage.3TA632LKW (General/Product specifications); oem_spec
Description	Control wire terminal kit (terminal body aluminum)	A	S184 p.12-37, Table 12-63; oem_spec
	Eaton molded case circuit breaker accessory wire terminal kit, Control wire terminal kit, Three-pole, Frame J-K, Series C, Two-terminal	A	S251 skuPage.3TA632LKW (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-37, Table 12-63; oem_spec
Breaker compatibility	LG-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.3TA632LKW (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-37, Table 12-63; oem_spec
Material	terminal body aluminum	A	S184 p.12-37, Table 12-63; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.3TA632LKW (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.3TA632LKW (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7.875 in, height 3 in, width 4.375 in, weight 1.69 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values, wire range		

EDH-EAT-00546	4T631LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 400 A, Cu

OEM part number	4T631LK	A	S184 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Wire range	500-750 kcmil (1) (240-380 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS4K (EDH-EAT-00559)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00550	4T632LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 630 A, Cu

OEM part number	4T632LK	A	S184 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	4	A	same as above
Current rating	630 A max breaker	A	same as above
Kit contents	4 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Wire range	2 AWG-500 kcmil (2) (35-240 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS4K (EDH-EAT-00559)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00557	4T632LKW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame control wire terminal kit, 4P, copper

OEM part number	4T632LKW	A	S184 p.12-37, Table 12-63; oem_spec
Description	Control wire terminal kit (terminal body copper)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		

EDH-EAT-00544	4TA631LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA631LK	A	S184 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu/Al terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Wire range	500-750 kcmil (1) (240-380 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS4K (EDH-EAT-00559)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00548	4TA632LK	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series G LG-frame line/load terminal kit, 630 A, Cu/Al

OEM part number	4TA632LK	A	S184, S251 p.12-37, Table 12-60; oem_spec
Alternate / superseded numbers	UPC 782116165643	A	S251 alias; skuPage.4TA632LK (General/Product specifications); oem_spec
Description	Pressure type Cu/Al terminal for LG-frame	A	S184 p.12-37, Table 12-60; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 630 A, #2 AWG-500 kcmil Cu/Al, Frame J-K, Four-terminal	A	S251 skuPage.4TA632LK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-37, Table 12-60; oem_spec
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.4TA632LK (General/Product specifications); oem_spec
Poles	4	A	S184 p.12-37, Table 12-60; oem_spec
Current rating	630 A max breaker	A	same as above
	630 A	A	S251 skuPage.4TA632LK (General/Product specifications); oem_spec
Kit contents	4 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	S184 p.12-37, Table 12-60; oem_spec
Wire range	2 AWG-500 kcmil (2) (35-240 mm2)	A	same as above
	#2 AWG-500 kcmil Cu/Al	A	S251 skuPage.4TA632LK (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-37, Table 12-60; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.4TA632LK (General/Product specifications); oem_spec
Listing / approvals	UL Listed	A	S251 skuPage.4TA632LK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 7.78 in, height 3 in, width 4.38 in, weight 2.12 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above

Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS4K (EDH-EAT-00559)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00555	4TA632LKW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame control wire terminal kit, 4P, aluminum

OEM part number	4TA632LKW	A	S184 p.12-37, Table 12-63; oem_spec
Description	Control wire terminal kit (terminal body aluminum)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		

EDH-EAT-00552	T350LK	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series G LG-frame line/load terminal, 400 A, Cu

OEM part number	T350LK	A	S184, S251 p.12-37, Table 12-60; oem_spec
Alternate / superseded numbers	UPC 782116165681	A	S251 alias; skuPage.T350LK (General/Product specifications); oem_spec
Description	Pressure type Cu terminal for LG-frame	A	S184 p.12-37, Table 12-60; oem_spec
	Eaton molded case circuit breaker accessory line and load terminal, Line and load terminals, 400 A, #3 AWG-500 kcmil Cu, Frame J-K, Series G, Single-terminal	A	S251 skuPage.T350LK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-37, Table 12-60; oem_spec
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.T350LK (General/Product specifications); oem_spec
Current rating	400 A max breaker	A	S184 p.12-37, Table 12-60; oem_spec
	400 A	A	S251 skuPage.T350LK (General/Product specifications); oem_spec
Kit contents	1 terminals included	A	S184 p.12-37, Table 12-60; oem_spec
Wire range	2 AWG-500 kcmil (1) (35-240 mm2)	A	same as above
	#3 AWG-500 kcmil Cu	A	S251 skuPage.T350LK (General/Product specifications); oem_spec
Material	terminal body copper	A	S184 p.12-37, Table 12-60; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.T350LK (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.T350LK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1.5 in, height 1.5 in, width 2.5 in, weight 0.35 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		

Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00551	TA350LK	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series G LG-frame line/load terminal, 400 A, Cu/Al

OEM part number	TA350LK	A	S184, S251 p.12-37, Table 12-60; oem_spec
Alternate / superseded numbers	UPC 782116165674	A	S251 alias; skuPage.TA350LK (General/Product specifications); oem_spec
Description	Pressure type Cu/Al terminal for LG-frame; standard terminal on LGHDC 250-400 A	A	S184 p.12-37, Table 12-60; oem_spec
	Eaton molded case circuit breaker accessory terminal, Line and load terminals, 400 A, #3 AWG-500 kcmil Cu/Al, Series G, Single-terminal	A	S251 skuPage.TA350LK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-37, Table 12-60; oem_spec
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Current rating	400 A max breaker	A	same as above
	400 A	A	S251 skuPage.TA350LK (General/Product specifications); oem_spec
Kit contents	1 terminals included	A	S184 p.12-37, Table 12-60; oem_spec
Wire range	2 AWG-500 kcmil (1) (35-240 mm2)	A	same as above
	#3 AWG-500 kcmil Cu/Al	A	S251 skuPage.TA350LK (General/Product specifications); oem_spec
Material	terminal body aluminum	A	S184 p.12-37, Table 12-60; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.TA350LK (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.TA350LK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1.5 in, height 1.5 in, width 2.5 in, weight 0.15 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00553	TA632L	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame single terminal, 630 A, Cu/Al

OEM part number	TA632L	A	S186 V4-T2-356; oem_spec
Description	Single Cu/Al terminal, 1 per package, 2-500 kcmil (2)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LGEDC/LGSDC/LGHDC 630 A	A	same as above
Current rating	630 A	A	same as above
Kit contents	1 terminal	A	same as above
Wire range	2 AWG-500 kcmil (2) (35-240 mm2)	A	same as above
Material	aluminum body	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00558	**LTS3K**	Series G LG-frame terminal cover, 3-pole	LG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00559	**LTS4K**	Series G LG-frame terminal cover, 4-pole	LG-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00558 **LTS3K** Eaton / Cutler-Hammer barrier **ACTIVE EATON PRODUCT P**

Series G LG-frame terminal cover, 3-pole

OEM part number	LTS3K	**A**	S184, S251 p.12-37, Table 12-61; oem_spec
Alternate / superseded numbers	UPC 782116197941	**A**	S251 alias; skuPage.LTS3K (General/Product specifications); oem_spec
Description	Terminal cover; included in TA631L/T631L/TA632L kits	**A**	S184 p.12-37, Table 12-61; oem_spec
	Eaton molded case circuit breaker accessory terminal shield kit, Terminal shield kit, Three-pole, LT, Frame J-K, Series G	**A**	S251 skuPage.LTS3K (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-37, Table 12-61; oem_spec
Breaker compatibility	LG-frame	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.LTS3K (General/Product specifications); oem_spec
Poles	3	**A**	S184, S251 p.12-37, Table 12-61; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.LTS3K (General/Product specifications); oem_spec
Listing / approvals	UL Listed	**A**	S251 skuPage.LTS3K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.5 in, height 4.25 in, width 4.5 in, weight 0.6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00559	LTS4K	Eaton / Cutler-Hammer	barrier	ACTIVE EATON PRODUCT P

Series G LG-frame terminal cover, 4-pole

OEM part number	LTS4K	**A**	S184, S251 p.12-37, Table 12-61; oem_spec
Alternate / superseded numbers	UPC 782116197958	**A**	S251 alias; skuPage.LTS4K (General/Product specifications); oem_spec
Description	Terminal cover; included in TA631L/T631L/TA632L kits	**A**	S184 p.12-37, Table 12-61; oem_spec
	Eaton molded case circuit breaker accessory terminal shield kit, Terminal shield kit, Four-pole, LT, Frame J-K, Series G	**A**	S251 skuPage.LTS4K (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-37, Table 12-61; oem_spec
Breaker compatibility	LG-frame	**A**	same as above
Breaker frame	Frame J-K	**A**	S251 skuPage.LTS4K (General/Product specifications); oem_spec
Poles	4	**A**	S184, S251 p.12-37, Table 12-61; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.LTS4K (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.LTS4K (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.5 in, height 4.25 in, width 4.5 in, weight 0.8 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00560	**L3RTWK**	Series G LG-frame end cap kit (metric nuts), 3-pole	LG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00561	**L4RTWK**	Series G LG-frame end cap kit (metric nuts), 4-pole	LG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00564	**LGTES3**	Series G LG-frame terminal spreader, 3-pole	LG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00565	**LGTES4**	Series G LG-frame terminal spreader, 4-pole	LG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00562	**LGTEW3**	Series G LG-frame terminal extension, 3-pole	LG-frame **A**	Active Eaton product page (no Discontinued banner), accessed
EDH-EAT-00563	**LGTEW4**	Series G LG-frame terminal extension, 4-pole	LG-frame **A**	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00560	L3RTWK	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series G LG-frame end cap kit (metric nuts), 3-pole

OEM part number	L3RTWK	A	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Alternate / superseded numbers	UPC 782116157419	A	S251 alias; skuPage.L3RTWK (General/Product specifications); oem_spec
Description	End cap kit (metric nuts)	A	S184 p.12-37, Tables 12-62/12-64/12-65; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, End cap kit, Three-pole, Frame J-K, Series G	A	S251 skuPage.L3RTWK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Breaker compatibility	LG-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.L3RTWK (General/Product specifications); oem_spec
Poles	3	A	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.L3RTWK (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.L3RTWK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6 in, height 1 in, width 7 in, weight 0.3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00561	L4RTWK	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series G LG-frame end cap kit (metric nuts), 4-pole

OEM part number	L4RTWK	A	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Alternate / superseded numbers	UPC 782116157426	A	S251 alias; skuPage.L4RTWK (General/Product specifications); oem_spec
Description	End cap kit (metric nuts)	A	S184 p.12-37, Tables 12-62/12-64/12-65; oem_spec
	Eaton molded case circuit breaker accessory end cap kit, End cap kit, Four-pole, Frame J-K	A	S251 skuPage.L4RTWK (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Breaker compatibility	LG-frame	A	same as above
Breaker frame	Frame J-K	A	S251 skuPage.L4RTWK (General/Product specifications); oem_spec
Poles	4	A	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.L4RTWK (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	A	S251 skuPage.L4RTWK (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 1 in, height 8 in, width 6 in, weight 0.44 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00564	LGTES3	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series G LG-frame terminal spreader, 3-pole

OEM part number	LGTES3	**A**	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Alternate / superseded numbers	UPC 782116122912	**A**	S251 alias; skuPage.LGTES3 (General/Product specifications); oem_spec
Description	Terminal spreader	**A**	S184 p.12-37, Tables 12-62/12-64/12-65; oem_spec
	Eaton molded case circuit breaker accessory terminal extensions, Terminal extender, Three-pole, LG-Frame, Frame J-K, Series G	**A**	S251 skuPage.LGTES3 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Breaker compatibility	LG-frame	**A**	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Breaker frame	Frame J-K	**A**	S251 skuPage.LGTES3 (General/Product specifications); oem_spec
Poles	3	**A**	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.LGTES3 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.LGTES3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.75 in, height 1.25 in, width 1.25 in, weight 1.16 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00565	LGTES4	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series G LG-frame terminal spreader, 4-pole

OEM part number	LGTES4	**A**	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Alternate / superseded numbers	UPC 782116122929	**A**	S251 alias; skuPage.LGTES4 (General/Product specifications); oem_spec
Description	Terminal spreader	**A**	S184 p.12-37, Tables 12-62/12-64/12-65; oem_spec
	Eaton molded case circuit breaker accessory terminal extensions, Terminal extender, Four-pole, LG-Frame, Frame J-K, Series G	**A**	S251 skuPage.LGTES4 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Breaker compatibility	LG-frame	**A**	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Breaker frame	Frame J-K	**A**	S251 skuPage.LGTES4 (General/Product specifications); oem_spec
Poles	4	**A**	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.LGTES4 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.LGTES4 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.75 in, height 1.5 in, width 1.75 in, weight 1.52 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00562	LGTEW3	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series G LG-frame terminal extension, 3-pole

OEM part number	LGTEW3	**A**	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Alternate / superseded numbers	UPC 782116122899	**A**	S251 alias; skuPage.LGTEW3 (General/Product specifications); oem_spec
Description	Terminal extension	**A**	S184 p.12-37, Tables 12-62/12-64/12-65; oem_spec
	Eaton molded case circuit breaker accessory terminal spreaders, Terminal spreader, Three-pole, LG-Frame, Frame J-K, Series G	**A**	S251 skuPage.LGTEW3 (General/Product specifications); oem_spec
Application	accessory	**A**	S184 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Breaker compatibility	LG-frame	**A**	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Breaker frame	Frame J-K	**A**	S251 skuPage.LGTEW3 (General/Product specifications); oem_spec
Poles	3	**A**	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.LGTEW3 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	**A**	S251 skuPage.LGTEW3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.75 in, height 1.25 in, width 1.25 in, weight 1.17 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-EAT-00563	LGTEW4	Eaton / Cutler-Hammer	breaker-accessory	ACTIVE EATON PRODUCT P

Series G LG-frame terminal extension, 4-pole

OEM part number	LGTEW4	A	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Alternate / superseded numbers	UPC 782116122905	A	S251 alias; skuPage.LGTEW4 (General/Product specifications); oem_spec
Description	Terminal extension	A	S184 p.12-37, Tables 12-62/12-64/12-65; oem_spec
	Eaton molded case circuit breaker accessory terminal spreaders, Terminal spreader, Four-pole, LG-Frame, Frame J-K, Series G	A	S251 skuPage.LGTEW4 (General/Product specifications); oem_spec
Application	accessory	A	S184 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Breaker compatibility	LG-frame	A	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Breaker frame	Frame J-K	A	S251 skuPage.LGTEW4 (General/Product specifications); oem_spec
Poles	4	A	S184, S251 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	A	S251 skuPage.LGTEW4 (General/Product specifications); oem_spec
Listing / approvals	Contact Manufacturer	A	S251 skuPage.LGTEW4 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.75 in, height 1.5 in, width 1.75 in, weight 1.55 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

Breaker family Series G NG-Frame

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00529	**T1200NB3M**	Series G NG-frame line/load terminal, 1250 A, Cu (metric)	NG-frame 1250 A (not 1600 A) A	Active Eaton product page (no Discontinued banner), accessed

EDH-EAT-00529	T1200NB3M	Eaton / Cutler-Hammer	lug-kit	ACTIVE EATON PRODUCT P

Series G NG-frame line/load terminal, 1250 A, Cu (metric)

OEM part number	T1200NB3M	A	S184, S251 p.12-48, Table 12-82; oem_spec
Alternate / superseded numbers	UPC 786679166994	A	S251 alias; skuPage.T1200NB3M (General/Product specifications); oem_spec
Description	Optional copper pressure terminal for NG-frame; single terminals individually packed; not suitable with 1600 A frame	A	S184 p.12-48, Table 12-82; oem_spec
	Eaton molded case circuit breaker accessory terminal, Optional Al/Cu pressure terminals, 1200 A, (4) #3/0 AWG-400 kcmil Cu, Frame N, Series C, Line and load	A	S251 skuPage.T1200NB3M (General/Product specifications); oem_spec

Application	accessory	**A**	S184 p.12-48, Table 12-82; oem_spec
Breaker compatibility	NG-frame 1250 A (not 1600 A)	**A**	same as above
Breaker frame	Frame N	**A**	S251 skuPage.T1200NB3M (General/Product specifications); oem_spec
Current rating	1250 A	**A**	S184 p.12-48, Table 12-82; oem_spec
	1200 A	**A**	S251 skuPage.T1200NB3M (General/Product specifications); oem_spec
Kit contents	1 terminal (individually packed)	**A**	S184 p.12-48, Table 12-82; oem_spec
Wire range	(4) 3/0-400 kcmil (95-185 mm2)	**A**	same as above
	(4) #3/0 AWG-400 kcmil Cu	**A**	S251 skuPage.T1200NB3M (General/Product specifications); oem_spec
Material	copper body	**A**	S184 p.12-48, Table 12-82; oem_spec
Status	Active Eaton product page (no Discontinued banner), accessed 2026-10-21 (Page presence does not guarantee stock availability)	**A**	S251 skuPage.T1200NB3M (General/Product specifications); oem_spec
Listing / approvals	UL Listed; Contact Manufacturer	**A**	S251 skuPage.T1200NB3M (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 2.4 in, height 3.2 in, width 4.6 in, weight 4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Breakers: Series G NG-Frame		
Not yet documented	Dimensions, OEM instruction document, Torque values		

4 Square D / Schneider Electric

Lineage / brand markings: Square D, Schneider Electric, Federal Pioneer (Canada)

Family	Type	Status	Era	Entries	Pg
SQD-NQNF-RETRO Square D NQ / NF retrofit (custom trim + current interior into existing enclosure)	other	unknown	—	5	703
I-LINE I-Line circuit breaker panelboard (Class 2110)	panelboard	current	Catalog copyright 1998-2019	232	703
MLN Square D MLN panelboards and switchboards (ML breakers)	panelboard	Obsolete; Schneider recommends replacing the complete panelboard (new I-Line); FAL/KAL/LAL/MAL adapter kits SK4515/SK4516/SK4517/SK4578 offered as of 1/1/2015 but now obsolete; PowerPact has no adapter kits	Sold in the USA from 1962 to 1968	12	781
NA1B Square D NA1B panelboard (E-frame bolted, AC/DC)	panelboard	unknown	Advertised by Square D in September 1960	9	787
NEHB NEHB panelboard	panelboard	obsolete (1995)	1983-1995	8	787
NF NF panelboard (Class 1670)	panelboard	current	Series 0: 1995-Oct 2008; Series E1: Oct 2008-present	164	789
NH1B Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	panelboard	Obsolete (inference; superseded by NEHB then NF)	Catalogued in Square D Digest 152 (1970); NEHB is not in the 1970 index (later successor - inference)	11	819
NQ NQ panelboard (Class 1640)	panelboard	current	2008-present (replaced NQOD in 2008)	200	819
NQO NQO / NQOB panelboard	panelboard	obsolete	late 1960s-1987	22	890
NQOB Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	panelboard	Obsolete; enclosure parts not available; QSFB switch/fuse unit obsolete; trim clamp PK1TC obsolete (search summaries)	Advertised by Square D in May and September 1960 (NQO plug-in, NQOB bolted connection); a Schneider timeline (search summary) says 'developed in late 1960s till obsolescence in 1987' - conflicts with the 1960 ads	35	898
NQOD NQOD panelboard (Class 1630)	panelboard	obsolete	1987-2008	100	904
QMB QMB fusible panelboard (Class 4620)	panelboard	current	Catalog 4620CT9601 copyright 1985-2015; current design post-October 1984 (older QM/QW interiors pre-1984)	152	923
QMB-LEGACY Legacy QMB distribution (pre-October-1984 QM and QW interiors)	panelboard	obsolete; old-design blank fillers obsolete with no replacement	QM (31 in. wide box) and QW (38 in. wide box) interiors built before October 1984; pre-1961 interiors (incl. round bus bar) have no replacement switches	62	978
QED-2 Power-Style QED-2 Switchboard	switchboard	current (2700CT1101 v02 dated 2025-12 listed on se.com; OEM interiors catalog 2700CT1601 v1.3 2023-01)	Catalog 2700CT1101 copyright 1995-2012; 'connect to existing' list names generations QED-2/S, QED-2 Series 2, QED-3, QED-4	148	994
SPEED-D Speed-D Merchandised Service Section Switchboard	switchboard	unknown	In 2700CT1101 (2012)	54	1000

4.1 SQD-NQNF-RETRO — Square D NQ / NF retrofit (custom trim + current interior into existing enclosure)

FAM-SQD-015 · other · aka Square D Retrofit offering, RTI 14in NQ interior, NQ/NF retrofit form · markings: Square D, Schneider Electric

Schneider Electric (Square D) offers, through a retrofit form submitted via distributor to the local sales office (panel TAG group feasibility review), a custom trim built to fit an existing Schneider or competitor enclosure combined with a standard current-style NQ or NF interior. Enclosures 17 in wide and above take the standard 20 in W NQ/NF interior; narrower ones take the 'RTI' 14 in W NQ interior. NEMA 1 only (no N3R). Existing box studs are not used; the contractor centres the interior, shims as needed and fastens the mounting rails to the box back wall by any means. Square D does not offer QO/Homeline load center retrofit interiors.

Attribute	Value	Cl.	Sources
Box range	Enclosures >=17 in W: standard 20 in W NQ and NF interiors; enclosures <17 in W: 'RTI 14"W NQ interiors'; an NQ or NF panel can be up to 3 in longer than the existing enclosure; NEMA 1 applications only, not available for N3R (OEM FAQ text read via search-engine extract (se.com 403); upgrade to A once page is read directly)	B	S620 oem_spec
Mounting	Existing box studs are not used in Square D Retrofit offering; contractor attaches interior mounting rails to back wall of existing box with any fastening means; contractor must centre interior and may need to shim to correct elevation (OEM FAQ via search extract)	B	S621, S620 oem_spec
Ordering	Retrofit form completed and submitted to distributor -> local sales office for price, availability and feasibility from the panel TAG group; trim modified to fit existing box where possible, interior stays standard (OEM FAQ via search extract)	B	S620, S622 oem_spec
Listing / approvals	Square D equipment is generally not approved for installation in other manufacturers' gear; Schneider Services can perform a retrofit but UL listings may be voided and the warranty as well unless otherwise specified (US FAQ FA339443). Canadian FAQs describe the custom-trim retrofit offering without a listing statement. (OEM FAQ via search extract; regional answers differ)	B	S624, S620 oem_spec
Exclusions	Square D does not offer QO or Homeline load center retrofit interiors for old QO/Homeline load centers or for other manufacturers' existing boxes (OEM FAQ via search extract)	B	S623 oem_spec

Key documents: S620 FA239605 Schneider Electric FAQ FA239605 - Retrofit form / custom trim for existing Schneider Elect; S621 FA124771 Schneider Electric FAQ FA124771 - Existing box studs are not used in Square D Retrofit off; S622 FA116402 Schneider Electric FAQ FA116402 - Panel interiors for existing back boxes (retrofit form t; S623 FA283569 Schneider Electric FAQ FA283569 - Square D does not offer QO or Homeline load center retro; S624 FA339443 Schneider Electric FAQ FA339443 - Installing Square D equipment in other manufacturers' ge

Also fits this family (entry printed elsewhere): NQ418L1C14, NQ430L1C14, NQ430L2C14, NQ442L2C14, NQ30L1C14GS

4.2 I-LINE — I-Line circuit breaker panelboard (Class 2110)

FAM-SQD-006 · panelboard · aka Class 2110, HCJ, HCM, HCN, HCP, HCP-SU, HCR-U, HCW, HCWM, I Line, I-Line Combo (CP...), ILine · markings: Schneider Electric, Square D

Square D 600 Vac / 250 Vdc distribution panelboard with plug-on I-Line breakers mounted on a bus-bar stack; breaker held by mounting bracket fingers in pan keyslots and a retaining screw into a 7/32 in. pan hole. Interior types HCJ/HCM (32 in. wide, 250 A max branch), HCP-SU (single row, 26 in.), HCP (42 in.), HCR-U (44 in.). Unused spaces must be closed with blank fillers (HNM1BL/HNM4BL) and blank extensions (HLW/HLN). Solid neutral, sub-feed lug and SE barrier kits are merchandised.

Plug-on I-Line bus stack: breaker line-end jaws are integral to the breaker, shrouded in a molded insulator that keys into slots in the bus support base, are factory lubricated/preset and are 'blow-on'. The load end is held by an integral mounting bracket/foot screwed to the interior pan. The same interiors, fillers and extensions are used in QED switchboard I-Line distribution sections.

Evidence record from 1970 Digest: HCN 26 in W (FA/FY/Q2 to 100 A, 125-225 A KA; 600 A lugs / 400 A MB), HCM 32 in W x 8 in D (125/250 V AC-DC to 600 V AC; 800 A), HCW 41 in W (to LA 400 A branch; 800 A), HCWM 41 in W x 9-1/4 in D (to MA 800 A; 1200 A lugs). Solid neutral assemblies HC-xSN (HCN/HCM) and HCW-xSN (HCW/HCWM); blanks HNM-xBL; blank extensions HLW-xBL; sub-feed lugs SL-100/225/400/800 plug onto bus like a breaker. Q2 max 240 V AC; FY max 277 V AC.

Attribute	Value	Cl.	Sources
Status	current	A	S27, S95 p. 9-51 ff.; oem_spec
Era of manufacture	Catalog copyright 1998-2019	A	S95 p. 6; oem_spec
	HCN, HCM, HCW and HCWM I-Line distribution panelboards catalogued in 1970 (unassembled interiors, boxes, fronts)	A	S463 Digest 152 (1970) p.55, 72-75; oem_spec
Voltage rating	600 Vac, 250 Vdc	A	S27 Section 9 TOC; oem_spec
	Up to 600 Vac; AC or DC systems	A	S95 pp. 2, 8; oem_spec
Main ampacity	400-1200 A (HCJ 400-800 A; HCP/HCR-U to 1200 A)	A	S27, S30 p. 9-51 to 9-57; oem_spec

Attribute	Value	Cl.	Sources
Branch breakers accepted	I-Line plug-on: BD/BG/BJ, QB/QD/QG/QJ, HD/HG/HJ/HL/HR, JD/JG/JJ/JL/JR, LA/LH, LG/LJ/LL/LR, MG/MJ, PG/PJ/PL, RG/RJ/RL (by interior type)	A	S27 p. 9-51; oem_spec
	I-Line plug-on breakers 15-1200 A frames: FA, FH, BD/BG/BJ/BK, HD/HG/HJ/HL/HR, QB/QD/QG/QJ, JD/JG/JJ/JL/JR, LA/LH, LD/LG/LJ/LL/LR, MG/MJ, PG/PJ/PK/PL, RG/RJ/RK/RL	A	S95 pp. 8-11; oem_spec
Qed compat	I-Line panelboard fillers and extensions are the same for current I-Line distribution sections in QED switchboards	A	S104 oem_spec
Mounting	15-1200 A breakers require only a screwdriver; firmly attached to bus stack and mechanically attached to interior; load-end mounting bracket is integral to each breaker	A	S95 p. 6; oem_spec
Widths 1970	HCN 26 in W; HCM 32 in W x 8 in D; HCW 41 in W; HCWM 41 in W x 9-1/4 in D (Depths partly OCR-garbled)	B	S463 Digest 152 (1970) p.55; oem_spec

Breaker families associated: FA / FH (I-Line), H-frame HD/HG/HJ/HL/HR (I-Line), I-Limiter FI / KI / LI (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line), LA / LH (I-Line), LA / LH (L-frame, legacy thermal-magnetic), M-frame MG/MJ (I-Line), P-frame PG/PJ/PK/PL (I-Line), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR), PowerPacT L-frame (LG/LJ/LL/LR), PowerPacT M / P / R frame (I-Line), PowerPacT Q-frame (QB/QD/QG/QJ), PowerPact B-frame BD/BG/BJ/BK (I-Line), PowerPact L-frame LD/LG/LJ/LL/LR (I-Line), Q-frame QB/QD/QG/QJ (I-Line), R-frame RG/RJ/RK/RL (I-Line)
Key documents: S27 0100CT2401-SEC-09 Panelboards: Digest Section 9 (Square D Digest, Section 9 Panelboards); S28 Digest 0100CT2401 (online) Schneider Electric Digest Plus - Section 9: Panelboards (online HTML pages: NQ Panelboard ; S30 2110CT9701 I-Line Circuit Breaker Panelboards Class 2110 Catalog; S31 80043-309-20 Rev. 10 I-Line Circuit Breaker Power Distribution Panelboards Information Manual, Class 2110; S95 2110CT9701R07/19 I-Line Circuit Breaker Panelboards Catalog, Class 2110; S97 80030-695-02 I-Line (HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation; S104 FA108059 FAQ FA108059: Do the blank filler plates and extensions for I-Line panelboards fit the QED; S430 48049-250-01 S33930 Sub-feed Lugs Instruction Bulletin; S431 48040-651-03 Rev. 01 SL400 Sub-feed Lugs Installation Instruction Bulletin; S463 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P
Also fits this family (entry printed elsewhere): CF20R63C, CF25R63C, CF20RJ63C, CF30RJ63C, CF16RJ63C36, HPA-FK, HPA-FYQ, HPA-LM, LP9503, FKHT, LAHT, FY3HT, FA3HT, AHEXLI, HPAXLM, S29371, S37422, S29370, HJPA

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00203	**HCM400VCA**	I-Line crimp lug adapter kit, HCJ, 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00204	**HCM600VCA**	I-Line crimp lug adapter kit, HCJ, 600 A	—	current (listed in 2026 Digest)
EDH-SQD-00205	**HCM800VCA**	I-Line crimp lug adapter kit, HCJ, 800 A	—	current (listed in 2026 Digest)
EDH-SQD-00209	**HCW1200VCA**	I-Line crimp lug adapter kit, HCP/HCR-U, 1200 A	—	current (listed in 2026 Digest)
EDH-SQD-00206	**HCW400VCA**	I-Line crimp lug adapter kit, HCP/HCR-U, 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00207	**HCW600VCA**	I-Line crimp lug adapter kit, HCP/HCR-U, 600 A	—	current (listed in 2026 Digest)
EDH-SQD-00208	**HCW800VCA**	I-Line crimp lug adapter kit, HCP/HCR-U, 800 A	—	current (listed in 2026 Digest)

EDH-SQD-00203	HCM400VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCJ, 400 A

OEM part number	HCM400VCA	A	S27 oem_spec
Description	Panelboard crimp lug adapter kit for HCJ main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S27 p. 9-57; oem_spec
Application	main	A	S27 oem_spec
Current rating	400 A	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

EDH-SQD-00204	HCM600VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCJ, 600 A

OEM part number	HCM600VCA	A	S27 oem_spec
Description	Panelboard crimp lug adapter kit for HCJ main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S27 p. 9-57; oem_spec
Application	main	A	S27 oem_spec
Current rating	600 A	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

EDH-SQD-00205	HCM800VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCJ, 800 A

OEM part number	HCM800VCA	A	S27 oem_spec
Description	Panelboard crimp lug adapter kit for HCJ main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S27 p. 9-57; oem_spec
Application	main	A	S27 oem_spec
Current rating	800 A	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

EDH-SQD-00209	HCW1200VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCP/HCR-U, 1200 A

OEM part number	HCW1200VCA	A	S27 oem_spec
Description	Panelboard crimp lug adapter kit for HCP/HCR-U main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S27 p. 9-57; oem_spec
Application	main	A	S27 oem_spec
Current rating	1200 A	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

EDH-SQD-00206	HCW400VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCP/HCR-U, 400 A

OEM part number	HCW400VCA	A	S27 oem_spec
Description	Panelboard crimp lug adapter kit for HCP/HCR-U main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S27 p. 9-57; oem_spec
Application	main	A	S27 oem_spec
Current rating	400 A	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

EDH-SQD-00207	HCW600VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCP/HCR-U, 600 A

OEM part number	HCW600VCA	A	S27 oem_spec
Description	Panelboard crimp lug adapter kit for HCP/HCR-U main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S27 p. 9-57; oem_spec
Application	main	A	S27 oem_spec
Current rating	600 A	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

EDH-SQD-00208	HCW800VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCP/HCR-U, 800 A

OEM part number	HCW800VCA	A	S27 oem_spec
Description	Panelboard crimp lug adapter kit for HCP/HCR-U main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S27 p. 9-57; oem_spec
Application	main	A	S27 oem_spec
Current rating	800 A	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00213	**S33930**	I-Line sub-feed lug kit, 1200 A	Protected by: H, J, LA/LH, M, P, R, L; panel types HCR-U (HCP/HCP-SU I A	current (listed in 2026 Digest)
EDH-SQD-00217	**S33931**	I-Line sub-feed lug kit, 1200 A	—	current (listed in 2026 Digest)
EDH-SQD-00218	**SL100**	I-Line sub-feed lug kit, 100 A	—	current (listed in 2026 Digest)
EDH-SQD-00514	**SL1200**	I-Line plug-on sub-feed lug SL1200	—	unknown
EDH-SQD-00214	**SL1200P5**	I-Line sub-feed lug kit, 1200 A	Protected by: H, J, LA/LH, M, P, R, L; panel types HCR-U (HCP/HCP-SU 8 A	current (listed in 2026 Digest)
EDH-SQD-00215	**SL1200P6**	I-Line sub-feed lug kit, 1200 A	Protected by: same as SL1200P5; panel types HCR-U (HCP/HCP-SU 800 A ma A	current (listed in 2026 Digest)
EDH-SQD-00216	**SL1200P7**	I-Line sub-feed lug kit, 1200 A	Protected by: same as SL1200P5; panel types HCR-U (HCP/HCP-SU 800 A ma A	current (listed in 2026 Digest)
EDH-SQD-00563	**SL-225**	Square D I-Line sub-feed lugs 225 A	—	1970 catalog item; current status unknown
EDH-SQD-00210	**SL250**	I-Line sub-feed lug kit, 250 A	Protected by: HD/HG/HJ/HL, JD/JG/JJ/JL (HR/JR at reduced rating); pane A	current (listed in 2026 Digest)
EDH-SQD-00211	**SL400**	I-Line sub-feed lug kit, 400 A	Protected by: H, J, LA/LH, LG/LJ/LL/LR (L 400 A max); panel types HCP, A	current (listed in 2026 Digest)
EDH-SQD-00358	**SL800**	I-Line plug-on sub-feed lug kit SL800	—	1970 catalog item; current status unknown
EDH-SQD-00513	**SL800FT**	I-Line plug-on sub-feed lug SL800FT	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00212	**SL800M5**	I-Line sub-feed lug kit, 800 A	Protected by: H, J, LA/LH, M, P, L; panel types HCJ, HCP, HCP-SU, HCR- **A**	current (listed in 2026 Digest)

EDH-SQD-00213	**S33930**	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line sub-feed lug kit, 1200 A

OEM part number	S33930	**A**	S27, S95 oem_spec
Description	I-Line plug-on 3-pole sub-feed lug kit, 1200 A (plugs on like a branch breaker)	**A**	S27 p. 9-57, 9-59; oem_spec
	I-Line plug-on (sub-feed) lug assembly, 1200 A (100% rated, for R-frame applications), terminal wire range (4) 3/0-600 kcmil Al/Cu	**A**	S95 p. 10; oem_spec
Application	sub-feed	**A**	S27 oem_spec
	sub-feed for 100% rated ('R' frame) applications; also listed on HCR-U interior page	**A**	S95 pp. 10, 21; oem_spec
Installation location	I-Line branch mounting space	**B**	S95, S124 oem_spec
Breaker compatibility	Protected by: H, J, LA/LH, M, P, R, L; panel types HCR-U (HCP/HCP-SU limited to 800 A)	**A**	S27 p. 9-57; oem_spec
	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	**B**	S118 oem_spec
Poles	3	**A**	S27 p. 9-57; oem_spec
Current rating	1200 A	**A**	same as above
	1200 A (100% rated, for R-frame applications)	**A**	S95 p. 10; oem_spec
Kit contents	Field-installable lug kits AL1200R53K (Al/Cu) or CU1200R53K (Cu) listed for S33930	**A**	S430 p.3; oem_spec
Dimensions	Mounting height 15 in. (381 mm); lug wire (4) #3/0-600 kcmil	**A**	S27 p. 9-57; oem_spec
Torque values	Optional lugs AL1200R53K / CU1200R53K: (4) #3/0-600 kcmil (Al/Cu resp. Cu), strip 1-3/16 in (30 mm), wire binding screw 450 lb-in (50 N-m), lug mounting screw 180 lb-in (20 N-m)	**A**	S430 p.3 Lug Information table; oem_spec
OEM instruction document	48049-250-01 (05/2001): place on I-Line pan with jaws pushed against bus; rack onto bus with long-shank screwdrivers alternately in top and bottom slots until jaws fully engage; tighten four screws (A) firmly without bending mounting bracket; Do not adjust jaws; do not remove joint compound; if necessary use Square D joint compound PJC7201	**A**	S430 pp.1-2; oem_spec
Status	current (listed in 2026 Digest)	**A**	S27 p. 9-57; oem_spec
Cross-links	Families: I-LINE, QED-2		
Requires	AL1200R53K (EDH-SQD-00515)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material, mounting height (except SL400)		

EDH-SQD-00217	**S33931**	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line sub-feed lug kit, 1200 A

OEM part number	S33931	**A**	S27 oem_spec
Description	I-Line plug-on 3-pole sub-feed lug kit, 1200 A (plugs on like a branch breaker)	**A**	S27 p. 9-57, 9-59; oem_spec
Application	sub-feed	**A**	S27 oem_spec
Poles	3	**A**	S27 p. 9-57; oem_spec
Current rating	1200 A	**A**	same as above
Dimensions	lug wire (4) #3/0-600 kcmil Al/Cu	**A**	same as above
Status	current (listed in 2026 Digest)	**A**	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00218	SL100	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line sub-feed lug kit, 100 A

OEM part number	SL100	A	S27, S118, S463 oem_spec
Alternate / superseded numbers	SL-100 (1970 Digest spelling)	A	S463 alias; oem_spec
Description	I-Line plug-on 3-pole sub-feed lug kit, 100 A (plugs on like a branch breaker)	A	S27 p. 9-57, 9-59; oem_spec
	Sub-feed lugs 100 A; plug onto bus bars in same manner as branch circuit breaker	A	S463 Digest 152 (1970) p.73; oem_spec
Application	sub-feed	A	S27, S463 oem_spec
Poles	3	A	S27 p. 9-57; oem_spec
Current rating	100 A	A	S27, S118, S463 p. 9-57; oem_spec
Dimensions	lug wire #14-1/0 Cu or #12-1/0 Al	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern, Material, wire range		

EDH-SQD-00514	SL1200	Square D / Schneider Electric	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug SL1200

OEM part number	SL1200	A	S432 48040-651-03 (2006) p.1; oem_spec
Description	I-Line plug-on sub-feed lug (covered by 48040-651-03, 05/2006 edition)	A	S432 p.1; oem_spec
Torque values	Conductor strip length 1-1/8 in (29 mm); conductor torque per faceplate label	A	S432 p.3 strip-length table; oem_spec
OEM instruction document	48040-651-03 (05/2006); racked onto I-Line bus like SL400; Do not adjust jaws; do not remove joint compound; if necessary use Square D joint compound PJC7201	A	S432 pp.1-3; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Status, wire range		
Open question	*Is SL1200 (2006) the predecessor of SL1200P5/P6/P7?*		

EDH-SQD-00214	SL1200P5	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line sub-feed lug kit, 1200 A

OEM part number	SL1200P5	A	S27, S95 oem_spec
Description	I-Line plug-on 3-pole sub-feed lug kit, 1200 A (plugs on like a branch breaker)	A	S27 p. 9-57, 9-59; oem_spec
	I-Line plug-on (sub-feed) lug assembly, 1200 A, terminal wire range (4) 3/0 AWG-500 kcmil	A	S95 p. 10; oem_spec
Application	sub-feed	A	S27 oem_spec
	sub-feed (plugs onto I-Line bus in breaker space)	A	S95, S118 oem_spec
Installation location	I-Line branch mounting space	B	S95, S124 oem_spec
Breaker compatibility	Protected by: H, J, LA/LH, M, P, R, L; panel types HCR-U (HCP/HCP-SU 800 A max)	A	S27 p. 9-57; oem_spec
	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S118 oem_spec
Poles	3	A	S27 p. 9-57; oem_spec
Current rating	1200 A	A	S27, S95 p. 9-57; oem_spec
Dimensions	Mounting height 9 in. (229 mm); lug wire (4) #3/0-500 kcmil	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Kit contents, Material, mounting height (except SL400), Torque values		

EDH-SQD-00215	SL1200P6	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line sub-feed lug kit, 1200 A

OEM part number	SL1200P6	A	S27, S95 oem_spec
Description	I-Line plug-on 3-pole sub-feed lug kit, 1200 A (plugs on like a branch breaker)	A	S27 p. 9-57, 9-59; oem_spec
	I-Line plug-on (sub-feed) lug assembly, 1200 A, terminal wire range (3) 350-600 kcmil	A	S95 p. 10; oem_spec
Application	sub-feed	A	S27 oem_spec
	sub-feed (plugs onto I-Line bus in breaker space)	A	S95, S118 oem_spec
Installation location	I-Line branch mounting space	B	S95, S124 oem_spec
Breaker compatibility	Protected by: same as SL1200P5; panel types HCR-U (HCP/HCP-SU 800 A max)	A	S27 p. 9-57; oem_spec
	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S118 oem_spec
Poles	3	A	S27 p. 9-57; oem_spec
Current rating	1200 A	A	S27, S95 p. 9-57; oem_spec
Dimensions	Mounting height 9 in. (229 mm); lug wire (3) 350-600 kcmil	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Kit contents, Material, mounting height (except SL400), Torque values		

EDH-SQD-00216	SL1200P7	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line sub-feed lug kit, 1200 A

OEM part number	SL1200P7	A	S27, S95 oem_spec
Description	I-Line plug-on 3-pole sub-feed lug kit, 1200 A (plugs on like a branch breaker)	A	S27 p. 9-57, 9-59; oem_spec
	I-Line plug-on (sub-feed) lug assembly, 1200 A, terminal wire range (3) 3/0 AWG-750 kcmil (750 kcmil compact Al only)	A	S95 p. 10; oem_spec
Application	sub-feed	A	S27 oem_spec
	sub-feed (plugs onto I-Line bus in breaker space)	A	S95, S118 oem_spec
Installation location	I-Line branch mounting space	B	S95, S124 oem_spec
Breaker compatibility	Protected by: same as SL1200P5; panel types HCR-U (HCP/HCP-SU 800 A max)	A	S27 p. 9-57; oem_spec
	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S118 oem_spec
Poles	3	A	S27 p. 9-57; oem_spec
Current rating	1200 A	A	S27, S95 p. 9-57; oem_spec
Dimensions	Mounting height 9 in. (229 mm); lug wire (3) #3/0-750 kcmil	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Kit contents, Material, mounting height (except SL400), Torque values		

EDH-SQD-00563	SL-225	Square D	sub-feed-lug-kit	1970 CATALOG ITEM; CUR

Square D I-Line sub-feed lugs 225 A

OEM part number	SL-225	A	S463 oem_spec
Alternate / superseded numbers	SL-225 [alias] (1970 Digest spelling)	A	same as above
Description	Sub-feed lugs 225 A; plug onto bus bars in same manner as branch circuit breaker	A	S463 Digest 152 (1970) p.73; oem_spec
Application	sub-feed	A	S463 oem_spec
Current rating	225 A	A	same as above
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00210	SL250	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line sub-feed lug kit, 250 A

OEM part number	SL250	A	S27, S95 oem_spec
Description	I-Line plug-on 3-pole sub-feed lug kit, 250 A (plugs on like a branch breaker)	A	S27 p. 9-57, 9-59; oem_spec
	I-Line plug-on (sub-feed) lug assembly, 250 A, terminal wire range (1) #4-300 kcmil Al/Cu	A	S95 p. 10; oem_spec
Application	sub-feed	A	S27 oem_spec
	sub-feed (plugs onto I-Line bus in breaker space)	A	S95, S118 oem_spec
Installation location	I-Line branch mounting space	B	S95, S124 oem_spec
Breaker compatibility	Protected by: HD/HG/HJ/HL, JD/JG/JJ/JL (HR/JR at reduced rating); panel types HCJ, HCP, HCP-SU, HCR-U	A	S27 p. 9-57; oem_spec
	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S118 oem_spec
Poles	3	A	S27 p. 9-57; oem_spec
Current rating	250 A	A	S27, S95 p. 9-57; oem_spec
Dimensions	Mounting height 5 in. (114 mm); lug wire (1) #4 AWG-300 kcmil	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Kit contents, Material, mounting height (except SL400), Torque values		

EDH-SQD-00211	SL400	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line sub-feed lug kit, 400 A

OEM part number	SL400	A	S27, S95, S463 oem_spec
Alternate / superseded numbers	SL-400 (1970 Digest spelling)	A	S463 alias; oem_spec
Description	I-Line plug-on 3-pole sub-feed lug kit, 400 A (plugs on like a branch breaker)	A	S27 p. 9-57, 9-59; oem_spec
	I-Line plug-on (sub-feed) lug assembly, 400 A, terminal wire range (1) #1-600 kcmil or (2) #1-250 kcmil Al/Cu	A	S95 p. 10; oem_spec
	Sub-feed lugs 400 A; plug onto bus bars in same manner as branch circuit breaker	A	S463 Digest 152 (1970) p.73; oem_spec
Application	sub-feed	A	S27, S463 oem_spec
	sub-feed (plugs onto I-Line bus in breaker space)	A	S95, S118 oem_spec
Installation location	I-Line branch mounting space	B	S95, S124 oem_spec
Breaker compatibility	Protected by: H, J, LA/LH, LG/LJ/LL/LR (L 400 A max); panel types HCP, HCP-SU, HCR-U wide side only (not HCJ - wire bending space)	A	S27 p. 9-57; oem_spec
	Distributor: for HCP/HCP-SU/HCR-U panelboards; LA/LH frame space	C	S124 distributor
Poles	3	A	S27 p. 9-57; oem_spec
Current rating	400 A	A	S27, S95, S463 p. 9-57; oem_spec
Dimensions	Mounting height 6 in. (152 mm); lug wire (1) #1 AWG-600 kcmil or 2 #1-250 kcmil	A	S27 p. 9-57; oem_spec
	Bar length 6.0 in (152 mm); destination HCP 86.0 in x 42.008 in and HCP-SU 86.0 in x 26.0 in panelboards; package 14.7 x 7.5 x 6.8 in, 10.05 lb	A	S433 data sheet p.1; oem_spec
	Occupies 6 in. of mounting space	C	S124 distributor
Fasteners	Do not adjust jaws; do not remove joint compound; if necessary use Square D joint compound PJC7201; tools: torque wrench with Torx and hex bits	A	S431 p.2; oem_spec
Torque values	Wire size and conductor torque per faceplate label / optional lug instructions (not tabulated in IB); strip length 1-3/8 in (35 mm)	A	S431, S432 48040-651-03 p.4; 2006 ed. p.3; oem_spec

OEM instruction document	48040-651-03 Rev.01 (09/2025): sub-feed lug placed on I-Line pan with hold-down tabs fully inserted in pan slots, jaw end pushed against bus; racked onto bus with two long-shank screwdrivers (upper and bottom slots) until jaws fully engage and the retaining screw aligns with pan locking holes; retaining screws (A) tightened fully without bending the mounting bracket; lug cover (B) removed for cabling and reinstalled	A	S431 pp.2-4; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-57; oem_spec
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern, Kit contents, Material, mounting height (except SL400)		

EDH-SQD-00358	**SL800**	Square D	sub-feed-lug-kit	1970 CATALOG ITEM; CUR

I-Line plug-on sub-feed lug kit SL800

OEM part number	SL800 (Listed in FAQ FAQ000269509 (via search summary); 2019 catalog lists SL800M5 only - SL800 may be predecessor)	A	S118, S432, S463 48040-651-03 (2006) p.1; oem_spec
Alternate / superseded numbers	SL-800 (1970 Digest spelling)	A	S463 alias; oem_spec
Description	I-Line plug-on sub-feed lug (covered by 48040-651-03, 05/2006 edition)	A	S432 p.1; oem_spec
	Sub-feed lugs 800 A; plug onto bus bars in same manner as branch circuit breaker	A	S463 Digest 152 (1970) p.73; oem_spec
Application	sub-feed	A	S463 oem_spec
Current rating	800 A	A	S118, S463 oem_spec
Torque values	Conductor strip length 1-3/8 in (35 mm); conductor torque per faceplate label	A	S432 p.3 strip-length table; oem_spec
OEM instruction document	48040-651-03 (05/2006); racked onto I-Line bus like SL400; Do not adjust jaws; do not remove joint compound; if necessary use Square D joint compound PJC7201	A	S432 pp.1-3; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material, relation to SL800M5, wire range		

EDH-SQD-00513	**SL800FT**	Square D / Schneider Electric	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug SL800FT

OEM part number	SL800FT	A	S432 48040-651-03 (2006) p.1; oem_spec
Description	I-Line plug-on sub-feed lug, 800 A, "FT" variant (meaning not stated - possibly feed-through) (FT meaning inferred)	C	S432 p.1; oem_spec
Torque values	Conductor strip length 1-3/8 in (35 mm); conductor torque per faceplate label	A	S432 p.3 strip-length table; oem_spec
OEM instruction document	48040-651-03 (05/2006); racked onto I-Line bus like SL400; Do not adjust jaws; do not remove joint compound; if necessary use Square D joint compound PJC7201	A	S432 pp.1-3; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Status, wire range		

EDH-SQD-00212	SL800M5	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line sub-feed lug kit, 800 A

OEM part number	SL800M5	A	S27, S95 oem_spec
Description	I-Line plug-on 3-pole sub-feed lug kit, 800 A (plugs on like a branch breaker)	A	S27 p. 9-57, 9-59; oem_spec
	I-Line plug-on (sub-feed) lug assembly, 800 A, terminal wire range (3) 3/0 AWG-500 kcmil	A	S95 p. 10; oem_spec
Application	sub-feed	A	S27 oem_spec
	sub-feed (plugs onto I-Line bus in breaker space)	A	S95, S118 oem_spec
Installation location	I-Line branch mounting space	B	S95, S124 oem_spec
Breaker compatibility	Protected by: H, J, LA/LH, M, P, L; panel types HCJ, HCP, HCP-SU, HCR-U	A	S27 p. 9-57; oem_spec
	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S118 oem_spec
Poles	3	A	S27 p. 9-57; oem_spec
Current rating	800 A	A	S27, S95 p. 9-57; oem_spec
Dimensions	Mounting height 9 in. (229 mm); lug wire (3) #3/0-500 kcmil	A	S27 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Kit contents, Material, mounting height (except SL400), Torque values		

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00515	**AL1200R53K**	Square D lug kit AL1200R53K (S33930 / R-frame)	—	unknown
EDH-SQD-00302	**AL150HD**	Standard aluminum mechanical lug kit AL150HD (HD/HG 15-150 A)	HD/HG 15-150 A A	unknown
EDH-SQD-00303	**AL175JD**	Standard aluminum mechanical lug kit AL175JD (JD/JG 150-175 A)	JD/JG 150-175 A A	unknown
EDH-SQD-00304	**AL250JD**	Standard aluminum mechanical lug kit AL250JD (JD/JG 200-250 A)	JD/JG 200-250 A A	unknown
EDH-SQD-00305	**AL400LA**	Standard aluminum mechanical lug kit AL400LA (LA 125-400 A)	LA 125-400 A A	Still listed in 2016 Digest Table 3.70
EDH-SQD-00516	**CU1200R53K**	Square D lug kit CU1200R53K (S33930 / R-frame)	—	unknown
EDH-SQD-00306	**CU150HD**	Optional copper mechanical lug kit CU150HD (HD/HG 15-150 A)	HD/HG 15-150 A A	unknown
EDH-SQD-00307	**CU250JD**	Optional copper mechanical lug kit CU250JD (JD/JG 150-250 A)	JD/JG 150-250 A A	unknown
EDH-SQD-00308	**CU400LA**	Optional copper mechanical lug kit CU400LA (LA 125-400 A)	LA 125-400 A A	Still listed in 2016 Digest Table 3.70

EDH-SQD-00515	AL1200R53K	Square D / Schneider Electric	lug-kit	STATUS UNKNOWN

Square D lug kit AL1200R53K (S33930 / R-frame)

OEM part number	AL1200R53K	A	S430 p.3; oem_spec
Description	Lug kit for S33930 sub-feed lugs: (4) #3/0-600 kcmil (98-300 mm2) Al/Cu per lug	A	same as above
Torque values	Wire binding screw 450 lb-in (50 N-m); lug mounting screw 180 lb-in (20 N-m); strip length 1-3/16 in (30 mm)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	kit_contents (lug count)		

EDH-SQD-00302	AL150HD	Square D	lug-kit	STATUS UNKNOWN

Standard aluminum mechanical lug kit AL150HD (HD/HG 15-150 A)

OEM part number	AL150HD	A	S96, S180 Tables 10/11, p. 18; oem_spec

Description	Standard aluminum mechanical lug kit; wire range (1) #14-3/0 Al/Cu	A	S96 p. 18; oem_spec
	Al lugs for use with Al or Cu wire; standard lug for HD/HG/HJ/HL 15-150 A	A	S180 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	A	S96 p. 18; oem_spec
	accessory	A	S180 p.124, Table 120; oem_spec
Installation location	line and/or load terminals (lay on top of breaker terminal, snap into insulating retainer)	A	same as above
Breaker compatibility	HD/HG 15-150 A	A	S96 p. 18; oem_spec
	HD, HG, HJ, HL 15-150 A (standard)	A	S180 p.124, Table 120; oem_spec
Current rating	15-150 A	A	same as above
Kit contents	3 lug(s) per kit	A	S96, S180 p. 18; oem_spec
Wire range	(1) 14-3/0 AWG Al or Cu	A	S180 p.124, Table 120; oem_spec
Material	tin-plated aluminum (catalog: Al/Cu lugs are tin-plated Al)	A	same as above
Cross-links	Families: I-LINE, QMB, QED-2 · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37446 (EDH-SQD-00445), S37447 (EDH-SQD-00446)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		
Open question	*Which short lug shield (S37446 60 A / S37447 150 A) applies when AL150HD is used on 60 A HD frames?*		

EDH-SQD-00303	**AL175JD**	Square D	lug-kit	STATUS UNKNOWN

Standard aluminum mechanical lug kit AL175JD (JD/JG 150-175 A)

OEM part number	AL175JD	A	S96, S180 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #1/0-4/0 Al/Cu	A	S96 p. 18; oem_spec
	Al lugs for use with Al or Cu wire; standard for JD/JG/JJ/JL 150-175 A	A	S180 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	A	S96 p. 18; oem_spec
	accessory	A	S180 p.124, Table 120; oem_spec
Breaker compatibility	JD/JG 150-175 A	A	S96 p. 18; oem_spec
	JD, JG, JJ, JL 150-175 A (standard)	A	S180 p.124, Table 120; oem_spec
Current rating	150-175 A	A	same as above
Kit contents	3 lug(s) per kit	A	S96 p. 18; oem_spec
	3 lugs per kit (set of 3)	A	S180 p.124, Table 120; oem_spec
Wire range	(1) 4-4/0 AWG Al or Cu	A	same as above
Material	aluminum (data sheet: Material Aluminium)	A	same as above
Identification features	Data sheet: mounting by screws; line and load (upstream/downstream); GTIN 785901686569	A	S181 p.1; oem_spec
Cross-links	Families: I-LINE, QMB, QED-2 · Breakers: J-frame JD/JG/JJ/JL/JR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37448 (EDH-SQD-00447)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00304	AL250JD	Square D	lug-kit	STATUS UNKNOWN

Standard aluminum mechanical lug kit AL250JD (JD/JG 200-250 A)

OEM part number	AL250JD	A	S96, S180 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #3/0-350 kcmil Al/Cu	A	S96 p. 18; oem_spec
	Al lugs for Al or Cu wire; standard for JD/JG/JJ/JL 200-250 A, optional for 150-175 A	A	S180 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	A	S96 p. 18; oem_spec
	accessory	A	S180 p.124, Table 120; oem_spec
Breaker compatibility	JD/JG 200-250 A	A	S96 p. 18; oem_spec
	JD, JG, JJ, JL 200-250 A standard; 150-175 A optional	A	S180 p.124, Table 120; oem_spec
Current rating	150-250 A	A	same as above
Kit contents	3 lug(s) per kit	A	S96, S180 p. 18; oem_spec
Wire range	(1) 3/0 AWG-350 kcmil Al or Cu	A	S180 p.124, Table 120; oem_spec
Material	tin-plated aluminum	A	same as above
Cross-links	Families: I-LINE, QMB, QED-2 · Breakers: J-frame JD/JG/JJ/JL/JR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37448 (EDH-SQD-00447)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		
Open question	*Distributor (Stanion) lists AL250JD wire range as 8-1/0 AWG Al / 14-1/0 Cu, contradicting OEM 3/0-350 kcmil; distributor likely in error.*		

EDH-SQD-00305	AL400LA	Square D	lug-kit	STILL LISTED IN 2016 D

Standard aluminum mechanical lug kit AL400LA (LA 125-400 A)

OEM part number	AL400LA	A	S96, S182 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #1-600 or (2) #1-250 kcmil Al/Cu	A	S96 p. 18; oem_spec
	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	S182 p.3-28, Table 3.88; oem_spec
Application	load terminals of QMB circuit breaker units	A	S96 p. 18; oem_spec
	accessory	A	S182 p.3-28, Table 3.88; oem_spec
Breaker compatibility	LA 125-400 A	A	S96 p. 18; oem_spec
	Q4, LA, LH 125-400 A standard	A	S182 p.3-28, Table 3.88; oem_spec
Kit contents	1 lug(s) per kit	A	S96, S182 p. 18; oem_spec
Wire range	(1) 1 AWG-600 kcmil or (2) 1 AWG-250 kcmil	A	S182 p.3-28, Table 3.88; oem_spec
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S183 p.3-26, Table 3.70; oem_spec
Cross-links	Families: I-LINE, QMB, QED-2 · Breakers: LA / LH (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, OEM instruction document, Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00516	CU1200R53K	Square D / Schneider Electric	lug-kit	STATUS UNKNOWN

Square D lug kit CU1200R53K (S33930 / R-frame)

OEM part number	CU1200R53K	A	S430 p.3; oem_spec
Description	Lug kit for S33930 sub-feed lugs: (4) #3/0-600 kcmil (98-300 mm2) Cu per lug	A	same as above
Torque values	Wire binding screw 450 lb-in (50 N-m); lug mounting screw 180 lb-in (20 N-m); strip length 1-3/16 in (30 mm)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	kit_contents (lug count)		

EDH-SQD-00306	CU150HD	Square D	lug-kit	STATUS UNKNOWN

Optional copper mechanical lug kit CU150HD (HD/HG 15-150 A)

OEM part number	CU150HD	A	S96, S180 Tables 10/11, p. 18; oem_spec
Description	Optional copper mechanical lug kit; wire range (1) #14-2/0 Cu	A	S96 p. 18; oem_spec
	Cu lugs for use with Cu wire only (optional)	A	S180 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	A	S96 p. 18; oem_spec
	accessory	A	S180 p.124, Table 120; oem_spec
Breaker compatibility	HD/HG 15-150 A	A	S96 p. 18; oem_spec
	HD, HG, HJ, HL 15-150 A (optional)	A	S180 p.124, Table 120; oem_spec
Current rating	15-150 A	A	same as above
Kit contents	3 lug(s) per kit	A	S96, S180 p. 18; oem_spec
Wire range	(1) 14-2/0 AWG Cu	A	S180 p.124, Table 120; oem_spec
Material	copper (Cu-only lugs are made of copper)	A	same as above
Cross-links	Families: I-LINE, QMB, QED-2 · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00307	CU250JD	Square D	lug-kit	STATUS UNKNOWN

Optional copper mechanical lug kit CU250JD (JD/JG 150-250 A)

OEM part number	CU250JD	A	S96, S180 Tables 10/11, p. 18; oem_spec
Description	Optional copper mechanical lug kit; wire range (1) #1/0-300 kcmil Cu	A	S96 p. 18; oem_spec
	Cu lugs for use with Cu wire only (optional)	A	S180 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	A	S96 p. 18; oem_spec
	accessory	A	S180 p.124, Table 120; oem_spec
Breaker compatibility	JD/JG 150-250 A	A	S96 p. 18; oem_spec
	JD, JG, JJ, JL 150-250 A (optional)	A	S180 p.124, Table 120; oem_spec
Current rating	150-250 A	A	same as above
Kit contents	3 lug(s) per kit	A	S96, S180 p. 18; oem_spec
Wire range	(1) 1/0-300 kcmil Cu	A	S180 p.124, Table 120; oem_spec
Material	copper	A	same as above
Cross-links	Families: I-LINE, QMB, QED-2 · Breakers: J-frame JD/JG/JJ/JL/JR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00308	CU400LA	Square D	lug-kit	STILL LISTED IN 2016 D

Optional copper mechanical lug kit CU400LA (LA 125-400 A)

OEM part number	CU400LA	A	S96, S182 Tables 10/11, p. 18; oem_spec
Description	Optional copper mechanical lug kit; wire range (1) #1-600 or (2) #1-250 kcmil Cu	A	S96 p. 18; oem_spec
	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	S182 p.3-28, Table 3.88; oem_spec
Application	load terminals of QMB circuit breaker units	A	S96 p. 18; oem_spec
	accessory	A	S182 p.3-28, Table 3.88; oem_spec
Breaker compatibility	LA 125-400 A	A	S96 p. 18; oem_spec
	Q4, LA, LH 125-400 A optional	A	S182 p.3-28, Table 3.88; oem_spec
Kit contents	1 lug(s) per kit	A	S96, S182 p. 18; oem_spec
Wire range	(1) 1 AWG-600 kcmil Cu or (2) 1 AWG-250 kcmil Cu	A	S182 p.3-28, Table 3.88; oem_spec
Material	copper lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S183 p.3-26, Table 3.70; oem_spec
Cross-links	Families: I-LINE, QMB, QED-2 · Breakers: LA / LH (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, OEM instruction document, Torque values, use on I-Line versions of same frames not stated in this source		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00151	**HQO306**	Plug-on QO distribution panel for I-Line (6-pole)	—	listed in 2025 catalog

EDH-SQD-00151	HQO306	Square D	breaker-mounting-kit	LISTED IN 2025 CATALOG

Plug-on QO distribution panel for I-Line (6-pole)

OEM part number	HQO306	A	S30, S95 oem_spec
Description	Six-pole 240 Vac max plug-on QO distribution panel that mounts in all I-Line panelboards; accepts QO, QO-H, QO-VH, QH, Qwik-Gard plug-on breakers	A	S30 p. 19; oem_spec
	Six-pole, 240 Vac max QO plug-on distribution panel that mounts in all I-Line panelboards; accepts QO, QO-H, QO-VH, QH and Qwik-Gard plug-on breakers through 30 A; max three GFI-suffix breakers	A	S95 p. 10; oem_spec
Application	branch (small-circuit adapter in I-Line space)	A	S95 oem_spec
Voltage rating	240 Vac max	A	same as above
Status	listed in 2025 catalog	A	S30 oem_spec
Cross-links	Families: I-LINE, QED-2 · Breakers: QO (plug-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material, mounting height		
Open question	*Is HQO306 listed for QED-2 I-Line sections?*		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00162	**HC2SN**	I-Line solid neutral assembly, HCJ, 225 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00163	**HC4SN**	I-Line solid neutral assembly, HCJ, 400 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00164	**HC6SN**	I-Line solid neutral assembly, HCJ, 600 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00172	**HC6SNALCU**	I-Line solid neutral assembly, HCJ, 600 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00180	**HC6SNCU**	I-Line solid neutral assembly, HCJ, 600 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00165	**HC8SN**	I-Line solid neutral assembly, HCJ, 800 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00173	**HC8SNALCU**	I-Line solid neutral assembly, HCJ, 800 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00181	**HC8SNCU**	I-Line solid neutral assembly, HCJ, 800 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00178	**HCP12SNALCU**	I-Line solid neutral assembly, HCP, 1200 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00186	**HCP12SNCU**	I-Line solid neutral assembly, HCP, 1200 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00175	**HCP4SNALCU**	I-Line solid neutral assembly, HCP, 400 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00176	**HCP6SNALCU**	I-Line solid neutral assembly, HCP, 600 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00177	**HCP8SNALCU**	I-Line solid neutral assembly, HCP, 800 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00166	**HCPSU8SN**	I-Line solid neutral assembly, HCP-SU, 800 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00174	**HCPSU8SNALCU**	I-Line solid neutral assembly, HCP-SU, 800 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00182	**HCPSU8SNCU**	I-Line solid neutral assembly, HCP-SU, 800 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00601	**HCPSU8SNCW**	I-Line HCP-SU 800 A neutral with CT, bonding strap and ground lug kit	—	unknown
EDH-SQD-00179	**HCR12SNALCU**	I-Line solid neutral assembly, HCR-U, 1200 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00189	**HCR12SNCT**	I-Line HCR-U 1200 A solid neutral with neutral current transformer	—	current (listed in 2026 Digest)
EDH-SQD-00600	**HCR12SNCTW**	I-Line HCR-U 1200 A solid neutral with CT, bonding strap and ground lug kit	—	unknown
EDH-SQD-00188	**HCR12SNCU**	I-Line solid neutral assembly, HCR-U, 1200 A, Cu/Cu	—	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00170	**HCW12SN**	I-Line solid neutral assembly, HCP, 1200 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00187	**HCW12SNCU**	I-Line solid neutral assembly, HCP, 1200 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00167	**HCW4SN**	I-Line solid neutral assembly, HCP, 400 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00183	**HCW4SNCU**	I-Line solid neutral assembly, HCP, 400 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00168	**HCW6SN**	I-Line solid neutral assembly, HCP, 600 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00184	**HCW6SNCU**	I-Line solid neutral assembly, HCP, 600 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00169	**HCW8SN**	I-Line solid neutral assembly, HCP, 800 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00185	**HCW8SNCU**	I-Line solid neutral assembly, HCP, 800 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00171	**HCWM12SN**	I-Line solid neutral assembly, HCR-U, 1200 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00191	**ILHCJ1ESN**	I-Line expanded neutral kit, HCJ with 45 in. or larger unit mounting space, aluminum	—	unknown
EDH-SQD-00197	**ILHCJ1ESNC**	I-Line expanded neutral kit, HCJ, copper	—	unknown
EDH-SQD-00190	**ILHCJ27ESN**	I-Line expanded neutral kit, HCM/HCJ with 27 in. unit mounting space, aluminum	—	unknown
EDH-SQD-00192	**ILHCJ2ESN**	I-Line expanded neutral kit, HCJ with 45 in. or larger unit mounting space, aluminum	—	unknown
EDH-SQD-00198	**ILHCJ2ESNC**	I-Line expanded neutral kit, HCJ, copper	—	unknown
EDH-SQD-00195	**ILHCPRU1ESN**	I-Line expanded neutral kit, HCP & HCR-U, aluminum	—	unknown
EDH-SQD-00201	**ILHCPRU1ESNC**	I-Line expanded neutral kit, HCP & HCR-U, copper	—	unknown
EDH-SQD-00196	**ILHCPRU2ESN**	I-Line expanded neutral kit, HCP & HCR-U, aluminum	—	unknown
EDH-SQD-00202	**ILHCPRU2ESNC**	I-Line expanded neutral kit, HCP & HCR-U, copper	—	unknown
EDH-SQD-00193	**ILHCPSU1ESN**	I-Line expanded neutral kit, HCP-SU, aluminum	—	unknown
EDH-SQD-00199	**ILHCPSU1ESNC**	I-Line expanded neutral kit, HCP-SU, copper	—	unknown
EDH-SQD-00194	**ILHCPSU2ESN**	I-Line expanded neutral kit, HCP-SU, aluminum	—	unknown
EDH-SQD-00200	**ILHCPSU2ESNC**	I-Line expanded neutral kit, HCP-SU, copper	—	unknown

EDH-SQD-00162	**HC2SN**	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 225 A, Al/Al

OEM part number	HC2SN	**A**	S27, S463 oem_spec
Alternate / superseded numbers	HC-2SN (1970 Digest spelling)	**A**	S463 alias; oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	**A**	S27 p. 9-57; oem_spec
	Solid neutral assembly 225 A for Type HCN/HCM interior assemblies; mounted in main lug compartment, no additional height	**A**	S463 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	**A**	S27 p. 9-51 fn; oem_spec
	Main lug compartment	**A**	S463 Digest 152 (1970) p.73; oem_spec
Current rating	225 A	**A**	S27, S463 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	**A**	S27 p. 9-57; oem_spec
Dimensions	Main terminals (1) 6-300 kcmil; branch terminals (1) 6-300, (9) #1/0-14, (45) #4-14	**A**	same as above
Status	current (listed in 2026 Digest)	**A**	same as above
	1970 catalog item; current status unknown	**D**	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00163	HC4SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 400 A, Al/Al

OEM part number	HC4SN	A	S27, S463 oem_spec
Alternate / superseded numbers	HC-4SN (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S27 p. 9-57; oem_spec
	Solid neutral assembly 400 A for Type HCN/HCM interior assemblies; mounted in main lug compartment, no additional height	A	S463 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
	Main lug compartment	A	S463 Digest 152 (1970) p.73; oem_spec
Current rating	400 A	A	S27, S463 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S27 p. 9-57; oem_spec
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (45) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00164	HC6SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 600 A, Al/Al

OEM part number	HC6SN	A	S27, S463 oem_spec
Alternate / superseded numbers	HC-6SN (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S27 p. 9-57; oem_spec
	Solid neutral assembly 600 A for Type HCN/HCM interior assemblies; mounted in main lug compartment, no additional height	A	S463 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
	Main lug compartment	A	S463 Digest 152 (1970) p.73; oem_spec
Current rating	600 A	A	S27, S463 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S27 p. 9-57; oem_spec
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00172	HC6SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 600 A, Al lugs/Cu plate

OEM part number	HC6SNALCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	600 A	A	S27 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00180	HC6SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 600 A, Cu/Cu

OEM part number	HC6SNCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	600 A	A	S27 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00165	HC8SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 800 A, Al/Al

OEM part number	HC8SN	A	S27, S463 oem_spec
Alternate / superseded numbers	HC-8SN (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S27 p. 9-57; oem_spec
	Solid neutral assembly 800 A for Type HCN/HCM interior assemblies; mounted in main lug compartment, no additional height	A	S463 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
	Main lug compartment	A	S463 Digest 152 (1970) p.73; oem_spec
Current rating	800 A	A	S27, S463 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S27 p. 9-57; oem_spec
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00173	HC8SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 800 A, Al lugs/Cu plate

OEM part number	HC8SNALCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	800 A	A	S27 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00181	HC8SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 800 A, Cu/Cu

OEM part number	HC8SNCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	800 A	A	S27 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00178	HCP12SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 1200 A, Al lugs/Cu plate

OEM part number	HCP12SNALCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	1200 A	A	S27 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00186	HCP12SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 1200 A, Cu/Cu

OEM part number	HCP12SNCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	1200 A	A	S27 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00175	HCP4SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 400 A, Al lugs/Cu plate

OEM part number	HCP4SNALCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	400 A	A	S27 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (2) 4-600, (7) 6-350, (45) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00176	HCP6SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 600 A, Al lugs/Cu plate

OEM part number	HCP6SNALCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	600 A	A	S27 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00177	HCP8SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 800 A, Al lugs/Cu plate

OEM part number	HCP8SNALCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	800 A	A	S27 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00166	HCPSU8SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP-SU, 800 A, Al/Al

OEM part number	HCPSU8SN	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCP-SU interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	800 A	A	S27 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-600 kcmil; branch terminals (4) 3/0-600, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00174	HCPSU8SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP-SU, 800 A, Al lugs/Cu plate

OEM part number	HCPSU8SNALCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCP-SU interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	800 A	A	S27 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-600 kcmil; branch terminals (4) 3/0-600, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00182	HCPSU8SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP-SU, 800 A, Cu/Cu

OEM part number	HCPSU8SNCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCP-SU interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	800 A	A	S27 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-600 kcmil; branch terminals (4) 3/0-600, (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00601	HCPSU8SNCW	Square D	neutral-assembly	STATUS UNKNOWN

I-Line HCP-SU 800 A neutral with CT, bonding strap and ground lug kit

OEM part number	HCPSU8SNCW	A	S596 80043-706-02 p.3, p.5; oem_spec
Description	Neutral kit for use with HCP54868SU I-Line panelboards when the current transformer is used on a main breaker (800 A max) in a service entrance ground-fault system	A	S596 oem_spec
Torque values	1/4-20 screws 65-75 lb-in (7-8 N-m); CT lug pad center nut 21-29 lb-ft (29-39 N-m); 5/16 in hardware 80-125 lb-in (9-14 N-m); GEC binding screw 252 lb-in (29 N-m)	A	same as above
OEM instruction document	80043-706-02 (03/2013)	A	same as above
Cross-links	Families: I-LINE		

EDH-SQD-00179	HCR12SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCR-U, 1200 A, Al lugs/Cu plate

OEM part number	HCR12SNALCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCR-U interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	1200 A	A	S27 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00189	HCR12SNCT	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line HCR-U 1200 A solid neutral with neutral current transformer

OEM part number	HCR12SNCT	A	S27 oem_spec
Description	Solid neutral including neutral CT, to be ordered when RL main breakers with equipment ground fault are applied on 3-phase 4-wire systems	A	S27, S30 p. 9-54; oem_spec
	Solid neutral including a neutral current transformer; order when RL main breakers with equipment ground fault are applied on a 3-phase 4-wire system (HCR-U)	A	S27 oem_spec
Current rating	1200 A	B	S27 inference
OEM instruction document	CT neutral bonding: 80043-706-02 / 80043-789-01 (not downloaded to library)	C	inference
Status	current (listed in 2026 Digest)	A	S27 p. 9-54; oem_spec
Cross-links	Families: I-LINE · Breakers: PowerPacT M / P / R frame (I-Line), R-frame RG/RJ/RK/RL (I-Line)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Relationship between HCR12SNCT (Digest) and HCR12SNCTW (bulletin 80043-706-02) - W = with bonding kit?*		

EDH-SQD-00600	HCR12SNCTW	Square D	neutral-assembly	STATUS UNKNOWN

I-Line HCR-U 1200 A solid neutral with CT, bonding strap and ground lug kit

OEM part number	HCR12SNCTW	A	S596 80043-706-02 p.2, p.4; oem_spec
Description	Neutral kit for use with the HCR548612U I-Line panelboard when the neutral current transformer is used in a service entrance ground-fault system; main breaker up to 1200 A	A	S596 oem_spec
Kit contents	Bonding strap, neutral ground lug, 1/4-20 machine screw, 5/16-18 bolt/nut/washer (bag assembly)	A	same as above
Torque values	1/4-20 bonding-strap screw 65-75 lb-in (7-8 N-m); 5/16 in neutral ground lug hardware 80-125 lb-in (9-14 N-m); grounding electrode conductor wire binding screw 252 lb-in (29 N-m); branch-CT case: 7/8 in line lug bolt nut 720-840 lb-in (81-95 N-m)	A	same as above
OEM instruction document	80043-706-02 (03/2013); also 80043-789-01 (L/P/R frame CT bonding)	A	S596, S597 oem_spec
Cross-links	Families: I-LINE		

EDH-SQD-00188	HCR12SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCR-U, 1200 A, Cu/Cu

OEM part number	HCR12SNCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCR-U interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	1200 A	A	S27 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00170	HCW12SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 1200 A, Al/Al

OEM part number	HCW12SN	A	S27, S463 oem_spec
Alternate / superseded numbers	HCW-12SN (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
	Solid neutral assembly 1200 A for Type HCW/HCWM interior assemblies; mounted in main lug compartment, no additional height	A	S463 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
	Main lug compartment	A	S463 Digest 152 (1970) p.73; oem_spec
Current rating	1200 A	A	S27, S463 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S27 p. 9-57; oem_spec
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00187	HCW12SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 1200 A, Cu/Cu

OEM part number	HCW12SNCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	1200 A	A	S27 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (8) 250-500 kcmil (crimp); branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00167	HCW4SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 400 A, Al/Al

OEM part number	HCW4SN	A	S27, S463 oem_spec
Alternate / superseded numbers	HCW-4SN (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
	Solid neutral assembly 400 A for Type HCW/HCWM interior assemblies; mounted in main lug compartment, no additional height	A	S463 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
	Main lug compartment	A	S463 Digest 152 (1970) p.73; oem_spec
Current rating	400 A	A	S27, S463 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S27 p. 9-57; oem_spec
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (2) 4-600, (7) 6-350, (45) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00183	HCW4SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 400 A, Cu/Cu

OEM part number	HCW4SNCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	400 A	A	S27 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (2) 2-600, (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00168	HCW6SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 600 A, Al/Al

OEM part number	HCW6SN	A	S27, S463 oem_spec
Alternate / superseded numbers	HCW-6SN (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
	Solid neutral assembly 600 A for Type HCW/HCWM interior assemblies; mounted in main lug compartment, no additional height	A	S463 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
	Main lug compartment	A	S463 Digest 152 (1970) p.73; oem_spec
Current rating	600 A	A	S27, S463 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S27 p. 9-57; oem_spec
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00184	HCW6SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 600 A, Cu/Cu

OEM part number	HCW6SNCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	600 A	A	S27 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (2) 2-600, (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00169	HCW8SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 800 A, Al/Al

OEM part number	HCW8SN	A	S27, S463 oem_spec
Alternate / superseded numbers	HCW-8SN (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
	Solid neutral assembly 800 A for Type HCW/HCWM interior assemblies; mounted in main lug compartment, no additional height	A	S463 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
	Main lug compartment	A	S463 Digest 152 (1970) p.73; oem_spec
Current rating	800 A	A	S27, S463 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S27 p. 9-57; oem_spec
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00185	HCW8SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 800 A, Cu/Cu

OEM part number	HCW8SNCU	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	800 A	A	S27 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00171	HCWM12SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCR-U, 1200 A, Al/Al

OEM part number	HCWM12SN	A	S27 oem_spec
Description	Solid neutral assembly for I-Line HCR-U interior	A	S27 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S27 p. 9-51 fn; oem_spec
Current rating	1200 A	A	S27 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00191	ILHCJ1ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCJ with 45 in. or larger unit mounting space, aluminum

OEM part number	ILHCJ1ESN	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCJ with 45 in. or larger unit mounting space with 100% solid neutral (same as above)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +30 (#14-2/0), +16 (#6-350)	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00197	ILHCJ1ESNC	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCJ, copper

OEM part number	ILHCJ1ESNC	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCJ with 100% solid neutral (HC6SNCU, HC8SNCU)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Copper (only in CU/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +18 (#14-4), +9 (#14-1/0), +14 (#6-350); not in 27 in. HCJ	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		
Open question	*Bulletin table prints a footnote digit directly after this number (e.g. 'ILHCJ2ESN4'); catalog number confirmed from kit list as ILHCJ1ESNC*		

EDH-SQD-00190	ILHCJ27ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCM/HCJ with 27 in. unit mounting space, aluminum

OEM part number	ILHCJ27ESN	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCM/HCJ with 27 in. unit mounting space with 100% solid neutral (HC2SN, HC4SN, HC6SN, HC8SN, HC6SNALCU, HC8SNALCU)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +20 (#14-2/0), +10 (#6-350)	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00192	ILHCJ2ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCJ with 45 in. or larger unit mounting space, aluminum

OEM part number	ILHCJ2ESN	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCJ with 45 in. or larger unit mounting space with 100% solid neutral (same as above)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +30 (#14-2/0), +32 (#6-350); not with PowerPacT L vertical main	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		
Open question	*Bulletin table prints a footnote digit directly after this number (e.g. 'ILHCJ2ESN4'); catalog number confirmed from kit list as ILHCJ2ESN*		

EDH-SQD-00198	ILHCJ2ESNC	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCJ, copper

OEM part number	ILHCJ2ESNC	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCJ with 100% solid neutral (HC6SNCU, HC8SNCU)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Copper (only in CU/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +21 (#6-350); not in 27 in. HCJ; not with PowerPacT L vertical main	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		
Open question	*Bulletin table prints a footnote digit directly after this number (e.g. 'ILHCJ2ESN4'); catalog number confirmed from kit list as ILHCJ2ESNC*		

EDH-SQD-00195	ILHCPRU1ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP & HCR-U, aluminum

OEM part number	ILHCPRU1ESN	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP & HCR-U with 100% solid neutral (HCW4SN, HCP4SNALCU, HCW6SN, HCP6SNALCU, HCW8SN, HCP8SNALCU, HCW12SN, HCP12SNALCU, HCW12MSN, HCR12SNALCU)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +30 (#14-2/0), +16 (#6-350), +8 (2/0-750)	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00201	ILHCPRU1ESNC	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP & HCR-U, copper

OEM part number	ILHCPRU1ESNC	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP & HCR-U with 100% solid neutral (HCW4SNCU, HCW6SNCU, HCW8SNCU, HCP12SNCU, HCW12SNCU, HCR12SNCU)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Copper (only in CU/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +14 (#6-350), +3 (#2-600)	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00196	ILHCPRU2ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP & HCR-U, aluminum

OEM part number	ILHCPRU2ESN	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP & HCR-U with 100% solid neutral (same as above)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +16 (#6-350), +16 (2/0-750)	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00202	ILHCPRU2ESNC	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP & HCR-U, copper

OEM part number	ILHCPRU2ESNC	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP & HCR-U with 100% solid neutral (same as above)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Copper (only in CU/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +21 (#6-350)	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00193	ILHCPSU1ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP-SU, aluminum

OEM part number	ILHCPSU1ESN	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP-SU with 100% solid neutral (HCPSU8SN, HCPSU8SNALCU)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +30 (#14-2/0), +16 (#6-350), +7 (2/0-750)	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00199	ILHCPSU1ESNC	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP-SU, copper

OEM part number	ILHCPSU1ESNC	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP-SU with 100% solid neutral (HCPSU8SNCU)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Copper (only in CU/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +18 (#14-4), +9 (#14-1/0), +14 (#6-350)	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00194	ILHCPSU2ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP-SU, aluminum

OEM part number	ILHCPSU2ESN	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP-SU with 100% solid neutral (HCPSU8SN, HCPSU8SNALCU)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +21 (2/0-750)	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00200	ILHCPSU2ESNC	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP-SU, copper

OEM part number	ILHCPSU2ESNC	A	S74 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP-SU with 100% solid neutral (HCPSU8SNCU)	A	S74 Expanded Neutral Kits table; oem_spec
Material	Copper (only in CU/CU main neutral without CTs)	A	S74 table notes 3, 6; oem_spec
Dimensions	Terminations added: +21 (#6-350)	A	S74 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S74 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00130	**PK32DGTA**	I-Line equipment ground bar kit for HCJ, HCP, HCP-SU (single row), HCR-U	—	current (listed in 2026 Digest)

EDH-SQD-00130	PK32DGTA	Square D	ground-bar	CURRENT (LISTED IN 202

I-Line equipment ground bar kit for HCJ, HCP, HCP-SU (single row), HCR-U

OEM part number	PK32DGTA	A	S27, S95, S463 oem_spec
Alternate / superseded numbers	PK-32DGTA (1970 Digest spelling)	A	S463 alias; oem_spec
Description	I-Line equipment ground bar kit for HCJ, HCP, HCP-SU (single row), HCR-U	A	S27 p. 9-56; oem_spec
	Equipment ground bar mounted in panelboard box (available Cu or Al)	A	S95 p. 7; oem_spec
	I-Line and QMB distribution panelboards, 1 thru 45 circuits, 1200 A max mains - PK-32DGTA $10.60	A	S463 Digest 152 (1970) p.84; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
OEM instruction document	I-Line ground bar mounting: 80043-312-03 (11/2006); terminal torque 40-45 lb-in (4.5-5 N-m) (Bulletin catalog number not printed; association by subject)	B	S82 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-56; oem_spec
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE, QMB-LEGACY		
Not yet documented	Aftermarket / reproduction, current_status, Dimensions, Finish / plating, Mounting-hole pattern, Material, material of this specific number, terminals		

Interior

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00787	**HCP5486-8SU**	I-Line HCP-SU panelboard (interior) HCP5486-8SU - trim kit reference	—	unknown

EDH-SQD-00787	HCP5486-8SU	Square D	interior	STATUS UNKNOWN

I-Line HCP-SU panelboard (interior) HCP5486-8SU - trim kit reference

OEM part number	HCP5486-8SU	A	S27 80043-660-04 p.1; Digest Table 9.104; oem_spec
Alternate / superseded numbers	HCP54868SU	A	S27, S596 alias; oem_spec
Description	HCP-SU universal single-row main lugs or main breaker interior, 54 in mounting space, 800 A; Digest lists as HCP54868SU with HC2686T( )4P / HC2686T( )HR fronts, HC2686DB box, HC2886WP Type 3R/5/12, 86 in box height. Bulletin 80043-660-04 is the HCP trim kit instruction written for this panelboard	A	S27, S604 oem_spec
Cross-links	Families: I-LINE		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00361	**4051749901**	I-Line deadfront (trim) support bracket 4051749901	HCN-style I-Line panelboard (HCN3254-2); QED applicability unknown A	unknown

EDH-SQD-00361	4051749901	Square D	mounting-bracket	STATUS UNKNOWN

I-Line deadfront (trim) support bracket 4051749901

OEM part number	4051749901	A	S110 oem_spec
Description	Single trim support bracket, deadfront bracket for I-Line HCN3254-2 panelboard	A	same as above
Breaker compatibility	HCN-style I-Line panelboard (HCN3254-2); QED applicability unknown	A	same as above
Cross-links	Families: I-LINE		
Requires	8011417101 (EDH-SQD-00362)		
Not yet documented	Dimensions, other HCN sizes		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00152	**ILBFMHCJHULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCJ (HCM) / H, J	—	current (listed in 2026 Digest)
EDH-SQD-00153	**ILBFMHCPHJULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / H, J	—	current (listed in 2026 Digest)
EDH-SQD-00154	**ILBFMHCPLULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / LA, LH, PowerPacT L	—	current (listed in 2026 Digest)
EDH-SQD-00155	**ILBFMHCPMPULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / M, P	—	current (listed in 2026 Digest)
EDH-SQD-00156	**ILBFMHCRLULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCR / LA, LH, PowerPacT L	—	current (listed in 2026 Digest)
EDH-SQD-00157	**ILBFMHCRMULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCR / M	—	current (listed in 2026 Digest)
EDH-SQD-00158	**ILBFMHCRPULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCR / P	—	current (listed in 2026 Digest)
EDH-SQD-00159	**ILBFMHCRRULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCR / R	—	current (listed in 2026 Digest)
EDH-SQD-00590	**ILCOMBLUL26W**	I-Line Combo panelboard main line lug cover replacement side cover, 26 in enclosure (LA, LH, L)	LA, LH, L main circuit breakers A	for panelboards manufactured after January 1, 2017
EDH-SQD-00592	**ILCOMBLUL32W**	I-Line Combo panelboard main line lug cover replacement side cover, 32 in enclosure (LA, LH, L)	LA, LH, L main circuit breakers A	for panelboards manufactured after January 1, 2017
EDH-SQD-00594	**ILCOMBLUL44W**	I-Line Combo panelboard main line lug cover replacement side cover, 44 in enclosure (LA, LH, L)	LA, LH, L main circuit breakers A	for panelboards manufactured after January 1, 2017
EDH-SQD-00591	**ILCOMBMPUL26W**	I-Line Combo panelboard main line lug cover replacement side cover, 26 in enclosure (M, P)	M, P main circuit breakers A	for panelboards manufactured after January 1, 2017
EDH-SQD-00593	**ILCOMBMPUL32W**	I-Line Combo panelboard main line lug cover replacement side cover, 32 in enclosure (M, P)	M, P main circuit breakers A	for panelboards manufactured after January 1, 2017

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00595	**ILCOMBMPUL44W**	I-Line Combo panelboard main line lug cover replacement side cover, 44 in enclosure (M, P)	M, P main circuit breakers **A**	for panelboards manufactured after January 1, 2017
EDH-SQD-00160	**LALLC**	I-Line LA/LH vertical main line lug cover (US SE)	—	unknown
EDH-SQD-00161	**PPLLC**	I-Line PowerPacT L vertical main line lug cover (US SE); requires LTSM3P	—	unknown
EDH-SQD-00597	**RPINTBK1200HCPC**	I-Line mains/neutral compartment barrier kit, HCP 800/1200 A (crimp lugs)	—	unknown
EDH-SQD-00598	**RPINTBK1200HCPCIP2X**	I-Line mains/neutral compartment barrier kit, HCP 800/1200 A (crimp lugs), IP2X version	—	unknown
EDH-SQD-00599	**RPINTBK1200HCR**	I-Line mains/neutral compartment barrier kit, HCR-U 1200 A	—	unknown
EDH-SQD-00596	**RPINTBK800HCP**	I-Line mains/neutral compartment barrier kit, HCP 800 A (mechanical lugs)	—	unknown

EDH-SQD-00152 ILBFMHCJHULC Square D barrier CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCJ (HCM) / H, J

OEM part number	ILBFMHCJHULC	**A**	S27 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCJ (HCM) with back-fed main breaker H, J; for panelboards built after 1 Jan 2017; US only	**A**	S27, S72 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	**A**	S27 oem_spec
OEM instruction document	80043-839-01 Rev. 04	**A**	S72 oem_spec
Status	current (listed in 2026 Digest)	**A**	S27 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00153 ILBFMHCPHJULC Square D barrier CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / H, J

OEM part number	ILBFMHCPHJULC	**A**	S27 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCP, HCP-SU with back-fed main breaker H, J; for panelboards built after 1 Jan 2017; US only	**A**	S27, S72 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	**A**	S27 oem_spec
OEM instruction document	80043-839-01 Rev. 04	**A**	S72 oem_spec
Status	current (listed in 2026 Digest)	**A**	S27 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00154	ILBFMHCPLULC	Square D	barrier	CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / LA, LH, PowerPacT L

OEM part number	ILBFMHCPLULC	A	S27 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCP, HCP-SU with back-fed main breaker LA, LH, PowerPacT L; for panelboards built after 1 Jan 2017; US only	A	S27, S72 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	A	S27 oem_spec
OEM instruction document	80043-839-01 Rev. 04	A	S72 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00155	ILBFMHCPMPULC	Square D	barrier	CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / M, P

OEM part number	ILBFMHCPMPULC	A	S27 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCP, HCP-SU with back-fed main breaker M, P; for panelboards built after 1 Jan 2017; US only	A	S27, S72 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	A	S27 oem_spec
OEM instruction document	80043-839-01 Rev. 04	A	S72 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00156	ILBFMHCRLULC	Square D	barrier	CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCR / LA, LH, PowerPacT L

OEM part number	ILBFMHCRLULC	A	S27 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCR with back-fed main breaker LA, LH, PowerPacT L; for panelboards built after 1 Jan 2017; US only	A	S27, S72 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	A	S27 oem_spec
OEM instruction document	80043-839-01 Rev. 04	A	S72 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00157	ILBFMHCRMULC	Square D	barrier	CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCR / M

OEM part number	ILBFMHCRMULC	A	S27 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCR with back-fed main breaker M; for panelboards built after 1 Jan 2017; US only	A	S27, S72 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	A	S27 oem_spec
OEM instruction document	80043-839-01 Rev. 04	A	S72 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00158	ILBFMHCRPULC	Square D	barrier	CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCR / P

OEM part number	ILBFMHCRPULC	A	S27 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCR with back-fed main breaker P; for panelboards built after 1 Jan 2017; US only	A	S27, S72 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	A	S27 oem_spec
OEM instruction document	80043-839-01 Rev. 04	A	S72 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00159	ILBFMHCRRULC	Square D	barrier	CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCR / R

OEM part number	ILBFMHCRRULC	A	S27 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCR with back-fed main breaker R; for panelboards built after 1 Jan 2017; US only	A	S27, S72 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	A	S27 oem_spec
OEM instruction document	80043-839-01 Rev. 04	A	S72 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00590	ILCOMBLUL26W	Square D	barrier	FOR PANELBOARDS MANUFA

I-Line Combo panelboard main line lug cover replacement side cover, 26 in enclosure (LA, LH, L)

OEM part number	ILCOMBLUL26W	A	S72 80043-839-01 Table 4, p.4; oem_spec
Description	I-Line Combo Main Circuit Breaker Line Lug Cover Kit for U.S. Service Entrance Devices (Replacement Side Cover); I-Line panelboard enclosure width 26 inches; circuit breaker LA, LH, L	A	S72 oem_spec
Breaker compatibility	LA, LH, L main circuit breakers	A	same as above
Status	for panelboards manufactured after January 1, 2017	A	S72 note 4; oem_spec
Cross-links	Families: I-LINE · Breakers: LA / LH (I-Line), PowerPact L-frame LD/LG/LJ/LL/LR (I-Line)		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00592	ILCOMBLUL32W	Square D	barrier	FOR PANELBOARDS MANUFA

I-Line Combo panelboard main line lug cover replacement side cover, 32 in enclosure (LA, LH, L)

OEM part number	ILCOMBLUL32W	A	S72 80043-839-01 Table 4, p.4; oem_spec
Description	I-Line Combo Main Circuit Breaker Line Lug Cover Kit for U.S. Service Entrance Devices (Replacement Side Cover); I-Line panelboard enclosure width 32 inches; circuit breaker LA, LH, L	A	S72 oem_spec
Breaker compatibility	LA, LH, L main circuit breakers	A	same as above
Status	for panelboards manufactured after January 1, 2017	A	S72 note 4; oem_spec
Cross-links	Families: I-LINE · Breakers: LA / LH (I-Line), PowerPact L-frame LD/LG/LJ/LL/LR (I-Line)		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00594	ILCOMBLUL44W	Square D	barrier	FOR PANELBOARDS MANUFA

I-Line Combo panelboard main line lug cover replacement side cover, 44 in enclosure (LA, LH, L)

OEM part number	ILCOMBLUL44W	A	S72 80043-839-01 Table 4, p.4; oem_spec
Description	I-Line Combo Main Circuit Breaker Line Lug Cover Kit for U.S. Service Entrance Devices (Replacement Side Cover); I-Line panelboard enclosure width 44 inches; circuit breaker LA, LH, L	A	S72 oem_spec
Breaker compatibility	LA, LH, L main circuit breakers	A	same as above
Status	for panelboards manufactured after January 1, 2017	A	S72 note 4; oem_spec
Cross-links	Families: I-LINE · Breakers: LA / LH (I-Line), PowerPact L-frame LD/LG/LJ/LL/LR (I-Line)		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00591	ILCOMBMPUL26W	Square D	barrier	FOR PANELBOARDS MANUFA

I-Line Combo panelboard main line lug cover replacement side cover, 26 in enclosure (M, P)

OEM part number	ILCOMBMPUL26W	A	S72 80043-839-01 Table 4, p.4; oem_spec
Description	I-Line Combo Main Circuit Breaker Line Lug Cover Kit for U.S. Service Entrance Devices (Replacement Side Cover); I-Line panelboard enclosure width 26 inches; circuit breaker M, P	A	S72 oem_spec
Breaker compatibility	M, P main circuit breakers	A	same as above
Status	for panelboards manufactured after January 1, 2017	A	S72 note 4; oem_spec
Cross-links	Families: I-LINE · Breakers: M-frame MG/MJ (I-Line), P-frame PG/PJ/PK/PL (I-Line)		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00593	ILCOMBMPUL32W	Square D	barrier	FOR PANELBOARDS MANUFA

I-Line Combo panelboard main line lug cover replacement side cover, 32 in enclosure (M, P)

OEM part number	ILCOMBMPUL32W	A	S72 80043-839-01 Table 4, p.4; oem_spec
Description	I-Line Combo Main Circuit Breaker Line Lug Cover Kit for U.S. Service Entrance Devices (Replacement Side Cover); I-Line panelboard enclosure width 32 inches; circuit breaker M, P	A	S72 oem_spec
Breaker compatibility	M, P main circuit breakers	A	same as above
Status	for panelboards manufactured after January 1, 2017	A	S72 note 4; oem_spec
Cross-links	Families: I-LINE · Breakers: M-frame MG/MJ (I-Line), P-frame PG/PJ/PK/PL (I-Line)		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00595	ILCOMBMPUL44W	Square D	barrier	FOR PANELBOARDS MANUFA

I-Line Combo panelboard main line lug cover replacement side cover, 44 in enclosure (M, P)

OEM part number	ILCOMBMPUL44W	A	S72 80043-839-01 Table 4, p.4; oem_spec
Description	I-Line Combo Main Circuit Breaker Line Lug Cover Kit for U.S. Service Entrance Devices (Replacement Side Cover); I-Line panelboard enclosure width 44 inches; circuit breaker M, P	A	S72 oem_spec
Breaker compatibility	M, P main circuit breakers	A	same as above
Status	for panelboards manufactured after January 1, 2017	A	S72 note 4; oem_spec
Cross-links	Families: I-LINE · Breakers: M-frame MG/MJ (I-Line), P-frame PG/PJ/PK/PL (I-Line)		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00160	LALLC	Square D	barrier	UNKNOWN

I-Line LA/LH vertical main line lug cover (US SE)

OEM part number	LALLC	A	S72 oem_spec
Description	I-Line LA/LH vertical main line lug cover (US SE); vertical mains only, panels built after 1 Jan 2017	A	S72 Table 1; oem_spec
OEM instruction document	80043-839-01	A	S72 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE · Breakers: LA / LH (L-frame, legacy thermal-magnetic)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00161	PPLLC	Square D	barrier	UNKNOWN

I-Line PowerPacT L vertical main line lug cover (US SE); requires LTSM3P

OEM part number	PPLLC	A	S72 oem_spec
Description	I-Line PowerPacT L vertical main line lug cover (US SE); requires LTSM3P; vertical mains only, panels built after 1 Jan 2017	A	S72 Table 1; oem_spec
OEM instruction document	80043-839-01	A	S72 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00597	RPINTBK1200HCPC	Square D	barrier	STATUS UNKNOWN

I-Line mains/neutral compartment barrier kit, HCP 800/1200 A (crimp lugs)

OEM part number	RPINTBK1200HCPC	A	S73 80043-844-01 Rev.03 Kit Contents p.2-3; oem_spec
Description	I-Line panelboard barrier kit for the mains or neutral compartment (first-time installation or replacement); HCP 800/1200 A (crimp lugs); procedure applies to kits manufactured before August 2026	A	S73 oem_spec
Installation location	Over main lugs / neutral connections in the I-Line mains compartment	A	same as above
Kit contents	Items per table: A main end barrier, B neutral barrier lid, C #10-32 mounting screw, D retainer pin, E neutral side cover, F plastic clip, G cap plug, H back support, I cable barrier, J RD rivet (not every item in every kit). Mounting barrier assembly fastened with six #10-32 screws; wiring cut-outs removed with a utility knife (Per-kit check marks did not survive pdftotext; verify against PDF)	A	S73 p.2-5; oem_spec
Fasteners	#10-32 mounting screws (six for main barrier)	A	S73 p.4-5; oem_spec
OEM instruction document	80043-844-01 Rev. 03 (06/2026)	A	S73 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions, Material		

EDH-SQD-00598	RPINTBK1200HCPCIP2X	Square D	barrier	STATUS UNKNOWN

I-Line mains/neutral compartment barrier kit, HCP 800/1200 A (crimp lugs), IP2X version

OEM part number	RPINTBK1200HCPCIP2X	A	S73 80043-844-01 Rev.03 Kit Contents p.2-3; oem_spec
Description	I-Line panelboard barrier kit for the mains or neutral compartment (first-time installation or replacement); HCP 800/1200 A (crimp lugs), IP2X version	A	S73 oem_spec
Installation location	Over main lugs / neutral connections in the I-Line mains compartment	A	same as above
Kit contents	Items per table: A main end barrier, B neutral barrier lid, C #10-32 mounting screw, D retainer pin, E neutral side cover, F plastic clip, G cap plug, H back support, I cable barrier, J RD rivet (not every item in every kit). Table lists plastic clip qty 17, cable barrier qty 5, RD rivet qty 2 for the IP2X column (column alignment partly lost in text extraction) (Per-kit check marks did not survive pdftotext; verify against PDF)	A	S73 p.2-5; oem_spec
Fasteners	#10-32 mounting screws (six for main barrier)	A	S73 p.4-5; oem_spec
OEM instruction document	80043-844-01 Rev. 03 (06/2026)	A	S73 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions, Material		

EDH-SQD-00599	RPINTBK1200HCR	Square D	barrier	STATUS UNKNOWN

I-Line mains/neutral compartment barrier kit, HCR-U 1200 A

OEM part number	RPINTBK1200HCR	A	S73 80043-844-01 Rev.03 Kit Contents p.2-3; oem_spec
Description	I-Line panelboard barrier kit for the mains or neutral compartment (first-time installation or replacement); HCR-U 1200 A	A	S73 oem_spec
Installation location	Over main lugs / neutral connections in the I-Line mains compartment	A	same as above
Kit contents	Items per table: A main end barrier, B neutral barrier lid, C #10-32 mounting screw, D retainer pin, E neutral side cover, F plastic clip, G cap plug, H back support, I cable barrier, J RD rivet (not every item in every kit). Main end barrier, neutral barrier lid, #10-32 screws, retainer pin, cap plugs (table qty 16) (Per-kit check marks did not survive pdftotext; verify against PDF)	A	S73 p.2-5; oem_spec
Fasteners	#10-32 mounting screws (six for main barrier)	A	S73 p.4-5; oem_spec
OEM instruction document	80043-844-01 Rev. 03 (06/2026)	A	S73 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions, Material		

EDH-SQD-00596	RPINTBK800HCP	Square D	barrier	STATUS UNKNOWN

I-Line mains/neutral compartment barrier kit, HCP 800 A (mechanical lugs)

OEM part number	RPINTBK800HCP	A	S73 80043-844-01 Rev.03 Kit Contents p.2-3; oem_spec
Description	I-Line panelboard barrier kit for the mains or neutral compartment (first-time installation or replacement); HCP 800 A (mechanical lugs)	A	S73 oem_spec
Installation location	Over main lugs / neutral connections in the I-Line mains compartment	A	same as above
Kit contents	Items per table: A main end barrier, B neutral barrier lid, C #10-32 mounting screw, D retainer pin, E neutral side cover, F plastic clip, G cap plug, H back support, I cable barrier, J RD rivet (not every item in every kit). Main barrier fastened with six #10-32 screws to mounting pan; neutral barrier lid on retainer pin; cap plugs (qty 40 per table) close unused wire-entry and wire-binding-screw access holes (Per-kit check marks did not survive pdftotext; verify against PDF)	A	S73 p.2-5; oem_spec
Fasteners	#10-32 mounting screws (six for main barrier)	A	S73 p.4-5; oem_spec
OEM instruction document	80043-844-01 Rev. 03 (06/2026)	A	S73 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00146	**HLN1BL**	I-Line blank extension, 1.5 in., narrow side	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after **A**	current (listed in 2026 Digest)
EDH-SQD-00147	**HLN4BL**	I-Line blank extension, 4.5 in., narrow side	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after **A**	current (listed in 2026 Digest)
EDH-SQD-00149	**HLN4EBL**	I-Line blank extension, 4.5 in., narrow side (electronic trip access)	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after **A**	current (listed in 2026 Digest)
EDH-SQD-00144	**HLW1BL**	I-Line blank extension, 1.5 in., wide side	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after **A**	current (listed in 2026 Digest)
EDH-SQD-00562	**HLW-3BL**	Square D I-Line blank extension HLW-3BL	—	1970 catalog item; current status unknown
EDH-SQD-00145	**HLW4BL**	I-Line blank extension, 4.5 in., wide side	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after **A**	current (listed in 2026 Digest)
EDH-SQD-00148	**HLW4EBL**	I-Line blank extension, 4.5 in., wide side (electronic trip access)	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after **A**	current (listed in 2026 Digest)
EDH-SQD-00142	**HNM1BL**	I-Line blank filler kit, 1.5 in. (3 per kit)	any I-Line interior unused space **A**	current (listed in 2026 Digest)
EDH-SQD-00561	**HNM-3BL**	Square D I-Line blank, 3 in high	—	1970 catalog item; current status unknown
EDH-SQD-00143	**HNM4BL**	I-Line blank filler kit, 4.5 in. (5 per kit)	any I-Line interior unused space **A**	current (listed in 2026 Digest)

EDH-SQD-00146	HLN1BL	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank extension, 1.5 in., narrow side

OEM part number	HLN1BL	A	S27, S101, S97 oem_spec
Alternate / superseded numbers	80121-651-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S101 style_number; oem_spec
Description	1.5 in. blank extension mounted on narrow side of I-Line deadfront, used with HNM1BL/HNM4BL; not for use where it would cover a MicroLogic trip unit; kit of 3	A	S27, S84 p. 9-56; oem_spec
	Blank extension, narrow side, 1.5 in. (all applications except PowerPact H/J with Micrologic 5/6)	A	S101, S97 oem_spec
Application	blank extension (snaps onto mounting rail on underside of trim/deadfront; no screws)	A	S101 oem_spec
Installation location	Narrow side of I-Line interior deadfront	A	same as above
Breaker compatibility	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after 2011	A	S84, S27 oem_spec

	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S97, S101 oem_spec
Dimensions	1.5 in. (38.1 mm) mounting height	A	S84 oem_spec
	Covers 1.5 in. (38.1 mm) of breaker mounting height	A	S97 p. 2; oem_spec
Fasteners	Mounted over the mounting bracket in the deadfront; Phillips screwdriver	A	S84 oem_spec
OEM instruction document	80030-695-02 Rev. 01 (02/2019)	A	same as above
	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S97 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-56; oem_spec
	current	B	S101, S121 oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00147	HLN4BL	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank extension, 4.5 in., narrow side

OEM part number	HLN4BL	A	S27, S101, S97 oem_spec
Alternate / superseded numbers	80121-652-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S101 style_number; oem_spec
Description	4.5 in. blank extension mounted on narrow side of I-Line deadfront, used with HNM1BL/HNM4BL; not for use where it would cover a MicroLogic trip unit; kit of 5	A	S27, S84 p. 9-56; oem_spec
	Blank extension, narrow side, 4.5 in. (all except H/J with Micrologic 5/6)	A	S101, S97 oem_spec
Application	blank extension	A	S101 oem_spec
Installation location	Narrow side of I-Line interior deadfront	A	same as above
Breaker compatibility	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after 2011	A	S84, S27 oem_spec
	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S97, S101 oem_spec
Dimensions	4.5 in. (114.3 mm) mounting height	A	S84 oem_spec
	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S97 p. 2; oem_spec
Fasteners	Mounted over the mounting bracket in the deadfront; Phillips screwdriver	A	S84 oem_spec
OEM instruction document	80030-695-02 Rev. 01 (02/2019)	A	same as above
	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S97 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-56; oem_spec
	current	B	S101, S121 oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00149	HLN4EBL	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank extension, 4.5 in., narrow side (electronic trip access)

OEM part number	HLN4EBL	A	S27, S101, S97 oem_spec
Alternate / superseded numbers	80121-752-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S101 style_number; oem_spec
Description	4.5 in. blank extension mounted on narrow side of I-Line deadfront, used with HNM1BL/HNM4BL; for PowerPacT H/J with MicroLogic trip so trip unit is accessible; kit of 5	A	S27, S84 p. 9-56; oem_spec
	Blank extension, narrow side, 4.5 in., only for PowerPact H/J with Micrologic 5/6 trip unit	A	S101, S97 oem_spec

Application	blank extension added to end of H/J breaker	A	S101 oem_spec
Installation location	Narrow side of I-Line interior deadfront	A	same as above
Breaker compatibility	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after 2011	A	S84, S27 oem_spec
	PowerPact H/J with Micrologic 5/6 trip unit only	A	S97, S101 oem_spec
Dimensions	4.5 in. (114.3 mm) mounting height	A	S84 oem_spec
	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S97 p. 2; oem_spec
Fasteners	Mounted over the mounting bracket in the deadfront; Phillips screwdriver	A	S84 oem_spec
OEM instruction document	80030-695-02 Rev. 01 (02/2019)	A	same as above
	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S97 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-56; oem_spec
	current	B	S101, S121 oem_spec
Cross-links	Families: I-LINE, QED-2 · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR), H-frame HD/HG/HJ/HL/HR (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00144	HLW1BL	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank extension, 1.5 in., wide side

OEM part number	HLW1BL	A	S27, S101, S97, S463 oem_spec
Alternate / superseded numbers	80034-187-02 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S101 style_number; oem_spec
	HLW-1BL (1970 Digest spelling)	A	S463 alias; oem_spec
Description	1.5 in. blank extension mounted on wide side of I-Line deadfront, used with HNM1BL/HNM4BL; not for use where it would cover a MicroLogic trip unit; kit of 3	A	S27, S84 p. 9-56; oem_spec
	Blank extension, wide side, 1.5 in. (all except H/J with Micrologic 5/6)	A	S101, S97 oem_spec
	Blank extension HLW1BL listed with blanks (1970, $1.20)	B	S463 Digest 152 (1970) p.73; oem_spec
Application	blank extension; also used on wide side of HCW panelboards; LI->KI swap needs (1) HLW4BL + HNM1BL + HLW1BL	A	S101, S103, S102 oem_spec
Installation location	Wide side of I-Line interior deadfront	A	S101 oem_spec
Breaker compatibility	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after 2011; wide side used on HCP, HCP-SU, HCR-U	A	S84, S27 oem_spec
	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S97, S101 oem_spec
Kit contents	Kit of 3 per FA112712 and distributors (se.com product title says qty 5 - conflict)	C	S102, S121 distributor
Dimensions	1.5 in. (38.1 mm) mounting height	A	S84 oem_spec
	Covers 1.5 in. (38.1 mm) of breaker mounting height	A	S97 p. 2; oem_spec
Fasteners	Mounted over the mounting bracket in the deadfront; Phillips screwdriver	A	S84 oem_spec
OEM instruction document	80030-695-02 Rev. 01 (02/2019)	A	same as above
	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S97 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-56; oem_spec
	current	B	S101, S121 oem_spec
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE, QED-2		

Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00562	HLW-3BL	Square D	filler-plate	1970 CATALOG ITEM; CUR

Square D I-Line blank extension HLW-3BL

OEM part number	HLW-3BL	B	S463 oem_spec
Alternate / superseded numbers	HLW-3BL [alias] (1970 Digest spelling)	A	same as above
Description	Blank extension HLW-3BL listed with blanks (1970, $1.20)	B	S463 Digest 152 (1970) p.73; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00145	HLW4BL	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank extension, 4.5 in., wide side

OEM part number	HLW4BL	A	S27, S101, S97, S463 oem_spec
Alternate / superseded numbers	80034-188-03 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S101 style_number; oem_spec
	HLW-4BL (1970 Digest spelling)	A	S463 alias; oem_spec
Description	4.5 in. blank extension mounted on wide side of I-Line deadfront, used with HNM1BL/HNM4BL; not for use where it would cover a MicroLogic trip unit; kit of 5	A	S27, S84 p. 9-56; oem_spec
	Blank extension, wide side, 4.5 in. (all except H/J with Micrologic 5/6)	A	S101, S97 oem_spec
	Blank extension HLW4BL listed with blanks (1970, $1.20)	B	S463 Digest 152 (1970) p.73; oem_spec
Application	blank extension; also used on wide side of HCW panelboards; LI->KI swap needs (1) HLW4BL + HNM1BL + HLW1BL	A	S101, S103, S102 oem_spec
Installation location	Wide side of I-Line interior deadfront	A	S101 oem_spec
Breaker compatibility	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after 2011; wide side used on HCP, HCP-SU, HCR-U	A	S84, S27 oem_spec
	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S97, S101 oem_spec
Kit contents	Qty 5 per distributors	C	S121 distributor
Dimensions	4.5 in. (114.3 mm) mounting height	A	S84 oem_spec
	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S97 p. 2; oem_spec
Fasteners	Mounted over the mounting bracket in the deadfront; Phillips screwdriver	A	S84 oem_spec
OEM instruction document	80030-695-02 Rev. 01 (02/2019)	A	same as above
	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S97 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-56; oem_spec
	current	B	S101, S121 oem_spec
	1970 catalog item; current status unknown	D	S463 inference
Identification features	Surface-mount plate approx. 6.35 in. W x 4.5 in. H	C	S121 distributor
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00148	HLW4EBL	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank extension, 4.5 in., wide side (electronic trip access)

OEM part number	HLW4EBL	A	S27, S101, S97 oem_spec
Alternate / superseded numbers	80121-653-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S101 style_number; oem_spec
Description	4.5 in. blank extension mounted on wide side of I-Line deadfront, used with HNM1BL/HNM4BL; for PowerPacT H/J with MicroLogic trip so trip unit is accessible; kit of 5	A	S27, S84 p. 9-56; oem_spec
	Blank extension, wide side, 4.5 in., only for PowerPact H/J with Micrologic 5/6 trip unit	A	S101, S97 oem_spec
Application	blank extension added to end of H/J breaker	A	S101 oem_spec
Installation location	Wide side of I-Line interior deadfront	A	same as above
Breaker compatibility	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after 2011; wide side used on HCP, HCP-SU, HCR-U	A	S84, S27 oem_spec
	PowerPact H/J with Micrologic 5/6 trip unit only	A	S97, S101 oem_spec
Dimensions	4.5 in. (114.3 mm) mounting height	A	S84 oem_spec
	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S97 p. 2; oem_spec
Fasteners	Mounted over the mounting bracket in the deadfront; Phillips screwdriver	A	S84 oem_spec
OEM instruction document	80030-695-02 Rev. 01 (02/2019)	A	same as above
	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S97 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-56; oem_spec
	current	B	S101, S121 oem_spec
Cross-links	Families: I-LINE, QED-2 · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR), H-frame HD/HG/HJ/HL/HR (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00142	HNM1BL	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank filler kit, 1.5 in. (3 per kit)

OEM part number	HNM1BL	A	S27, S101, S95, S463 oem_spec
Alternate / superseded numbers	40517-408-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S101 style_number; oem_spec
	HNM-1BL (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Blank filler kit 1.5 in.; one kit contains 3 blank fillers	A	S27 p. 9-56; oem_spec
	Blank filler 1.5 in.	A	S101 oem_spec
	I-Line blank 1-1/2 in high (1970)	A	S463 Digest 152 (1970) p.73; oem_spec
Application	blank filler (covers bus in unused breaker mounting space; screws to interior mounting pan with screws 21593-20100)	A	S101 oem_spec
Installation location	Unused I-Line branch mounting space on bus stack	A	S31 oem_spec
	On I-Line bus stack/mounting pan in unused space (single- and double-row interiors)	A	S101 oem_spec
Breaker compatibility	any I-Line interior unused space	A	S97, S101 oem_spec
Kit contents	Kit of 3 (FA112712)	A	S102, S121 oem_spec
Dimensions	1.5 in. mounting height	A	S27 p. 9-56; oem_spec
	1.5 in. wide	A	S101 oem_spec
	1-1/2 in high (OCR table)	B	S463 oem_spec

OEM instruction document	Secured with screws 21593-20100 to interior mounting pan (FA243887)	A	S101 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-56; oem_spec
	current	B	S101, S121 oem_spec
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00561	HNM-3BL	Square D	filler-plate	1970 CATALOG ITEM; CUR

Square D I-Line blank, 3 in high

OEM part number	HNM-3BL	A	S463 oem_spec
Alternate / superseded numbers	HNM-3BL [alias] (1970 Digest spelling)	A	same as above
Description	I-Line blank 3 in high (1970)	A	S463 Digest 152 (1970) p.73; oem_spec
Dimensions	3 in high (OCR table)	B	S463 oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Material		

EDH-SQD-00143	HNM4BL	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank filler kit, 4.5 in. (5 per kit)

OEM part number	HNM4BL	A	S27, S101, S95, S463 oem_spec
Alternate / superseded numbers	40517-407-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S101 style_number; oem_spec
	HNM-4BL (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Blank filler kit 4.5 in.; one kit contains 5 blank fillers	A	S27 p. 9-56; oem_spec
	Blank filler 4.5 in.	A	S101 oem_spec
	I-Line blank 4-1/2 in high (1970)	A	S463 Digest 152 (1970) p.73; oem_spec
Application	blank filler (covers bus in unused breaker mounting space; screws to interior mounting pan)	A	S101 oem_spec
Installation location	Unused I-Line branch mounting space	A	S31 oem_spec
	On I-Line bus stack/mounting pan in unused space (single- and double-row interiors)	A	S101 oem_spec
Breaker compatibility	any I-Line interior unused space	A	S97, S101 oem_spec
Dimensions	4.5 in. mounting height	A	S27 p. 9-56; oem_spec
	4.5 in. wide	A	S101 oem_spec
	4-1/2 in high (OCR table)	B	S463 oem_spec
OEM instruction document	Secured with screws 21593-20100 to interior mounting pan (FA243887)	A	S101 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-56; oem_spec
	current	B	S101, S121 oem_spec
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern, Material		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00825	**HC-2636-CF**	Legacy 1970 I-Line front HC-2636-C for HC-2636-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00827	**HC-2645-CF**	Legacy 1970 I-Line front HC-2645-C for HC-2645-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00829	**HC-2654-CF**	Legacy 1970 I-Line front HC-2654-C for HC-2654-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00831	**HC-2663-CF**	Legacy 1970 I-Line front HC-2663-C for HC-2663-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00833	**HC-2672-CF**	Legacy 1970 I-Line front HC-2672-C for HC-2672-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00784	**HC2686T**	I-Line 4-piece trim (front) for HC2686DB box, F/S	—	unknown
EDH-SQD-00835	**HC-2690-CF**	Legacy 1970 I-Line front HC-2690-C for HC-2690-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00837	**HC-3238-TF**	Legacy 1970 I-Line front HC-3238-T for HC-3238-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00839	**HC-3247-TF**	Legacy 1970 I-Line front HC-3247-T for HC-3247-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00841	**HC-3256-TF**	Legacy 1970 I-Line front HC-3256-T for HC-3256-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00843	**HC-3274-TF**	Legacy 1970 I-Line front HC-3274-T for HC-3274-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00845	**HC-3292-TF**	Legacy 1970 I-Line front HC-3292-T for HC-3292-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00855	**HC-4144-TS**	Legacy 1970 I-Line front HC-4144-TS for HC-4144-DB box	—	Obsolete (1970 catalog item)
EDH-SQD-00857	**HC-4153-TS**	Legacy 1970 I-Line front HC-4153-TS for HC-4153-DB box	—	Obsolete (1970 catalog item)
EDH-SQD-00859	**HC-4162-TS**	Legacy 1970 I-Line front HC-4162-TS for HC-4162-DB box	—	Obsolete (1970 catalog item)
EDH-SQD-00861	**HC-4180-TS**	Legacy 1970 I-Line front HC-4180-TS for HC-4180-DB box	—	Obsolete (1970 catalog item)
EDH-SQD-00781	**HCM48T**	I-Line 4-piece trim (front) for HC3248DB9 box, F/S	—	unknown
EDH-SQD-00782	**HCM73T**	I-Line 4-piece trim (front) for HC3273DB9 box, F/S	—	unknown
EDH-SQD-00783	**HCM91T**	I-Line 4-piece trim (front) for HC3291DB9 box, F/S	—	unknown
EDH-SQD-00780	**HCR86T**	I-Line 4-piece trim (front) for HC4486DB box, F/S	—	unknown
EDH-SQD-00847	**HCS-4144-TF**	Legacy 1970 I-Line front HCS-4144-T for HC-4144-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00849	**HCS-4153-TF**	Legacy 1970 I-Line front HCS-4153-T for HC-4153-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00851	**HCS-4162-TF**	Legacy 1970 I-Line front HCS-4162-T for HC-4162-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00853	**HCS-4180-TF**	Legacy 1970 I-Line front HCS-4180-T for HC-4180-B box	—	Obsolete (1970 catalog item)
EDH-SQD-00785	**HCW50D**	I-Line add-on door kit (for HCW50TS trim)	—	unknown
EDH-SQD-00776	**HCW50T**	I-Line 4-piece trim (front) for HC4250DB box, F/S	—	unknown
EDH-SQD-00777	**HCW59T**	I-Line 4-piece trim (front) for HC4259DB box, F/S	—	unknown
EDH-SQD-00778	**HCW68T**	I-Line 4-piece trim (front) for HC4268DB box, F/S	—	unknown
EDH-SQD-00786	**HCW86D**	I-Line add-on door kit (for HCR86TS trim)	—	unknown
EDH-SQD-00779	**HCW86T**	I-Line 4-piece trim (front) for HC4286DB box, F/S	—	unknown

EDH-SQD-00825	HC-2636-CF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-2636-C for HC-2636-B box

OEM part number	HC-2636-CF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HC-2636-CS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-2636-B box (26 x 6-1/4 in W x D, 36 in H); catalog shown as HC-2636-C( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00827	HC-2645-CF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-2645-C for HC-2645-B box

OEM part number	HC-2645-CF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HC-2645-CS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-2645-B box (26 x 6-1/4 in W x D, 45 in H); catalog shown as HC-2645-C( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00829	HC-2654-CF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-2654-C for HC-2654-B box

OEM part number	HC-2654-CF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HC-2654-CS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-2654-B box (26 x 6-1/4 in W x D, 54 in H); catalog shown as HC-2654-C( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00831	HC-2663-CF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-2663-C for HC-2663-B box

OEM part number	HC-2663-CF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HC-2663-CS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-2663-B box (26 x 6-1/4 in W x D, 63 in H); catalog shown as HC-2663-C( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00833	HC-2672-CF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-2672-C for HC-2672-B box

OEM part number	HC-2672-CF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HC-2672-CS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-2672-B box (26 x 6-1/4 in W x D, 72 in H); catalog shown as HC-2672-C( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00784	HC2686T	Square D	trim	STATUS UNKNOWN

I-Line 4-piece trim (front) for HC2686DB box, F/S

OEM part number	HC2686T	A	S27 Digest Sec.9 Tables 9.104/9.105; oem_spec
Alternate / superseded numbers	HC2686TF (flush)	A	S27 alias; oem_spec
	HC2686TS [alias] (surface)	A	same as above
	HC2686T( )D [alias] (trim with door)	A	same as above
Description	I-Line 4-piece trim without door for HC2686DB box; add F (flush) or S (surface); trim with door = suffix D (e.g. HC2686T( )D)	A	same as above
Fasteners	End and side trims fastened with #10-32 screws; door: hinge pin at top, 1/4-20 screw into threaded insert at bottom (HCP/HCR/HCW/HCWM); HCN/HCM doors hang on stud with latch brackets on left side trim; drill 11/64 in for extra holes in enclosure lip	A	S605, S606 80043-449-03, 80043-616-03; oem_spec
OEM instruction document	80043-449-03 (09/2003) / 80043-616-03 (07/2001) I-Line 4-piece trim and door kits; 80043-660-04 HCP trim kit	A	S605, S606, S604 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions		

EDH-SQD-00835	HC-2690-CF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-2690-C for HC-2690-B box

OEM part number	HC-2690-CF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HC-2690-CS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-2690-B box (26 x 6-1/4 in W x D, 90 in H); catalog shown as HC-2690-C( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00837	HC-3238-TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-3238-T for HC-3238-B box

OEM part number	HC-3238-TF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HC-3238-TS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-3238-B box (32 x 8 in W x D, 38 in H); catalog shown as HC-3238-T( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00839	HC-3247-TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-3247-T for HC-3247-B box

OEM part number	HC-3247-TF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HC-3247-TS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-3247-B box (32 x 8 in W x D, 47 in H); catalog shown as HC-3247-T( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00841	HC-3256-TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-3256-T for HC-3256-B box

OEM part number	HC-3256-TF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HC-3256-TS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-3256-B box (32 x 8 in W x D, 56 in H); catalog shown as HC-3256-T( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00843	HC-3274-TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-3274-T for HC-3274-B box

OEM part number	HC-3274-TF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HC-3274-TS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-3274-B box (32 x 8 in W x D, 74 in H); catalog shown as HC-3274-T( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00845	HC-3292-TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-3292-T for HC-3292-B box

OEM part number	HC-3292-TF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HC-3292-TS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-3292-B box (32 x 8 in W x D, 92 in H); catalog shown as HC-3292-T( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00855	HC-4144-TS	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-4144-TS for HC-4144-DB box

OEM part number	HC-4144-TS	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line front for HC-4144-DB box (41 x 9-1/4 in W x D, 44 in H)	A	S463 oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Open question	*For HCWM (1200 A) the 1970 table prints only HC-41xx-TS (surface); was a flush version offered?*		

EDH-SQD-00857	HC-4153-TS	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-4153-TS for HC-4153-DB box

OEM part number	HC-4153-TS	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line front for HC-4153-DB box (41 x 9-1/4 in W x D, 53 in H)	A	S463 oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Open question	*For HCWM (1200 A) the 1970 table prints only HC-41xx-TS (surface); was a flush version offered?*		

EDH-SQD-00859	HC-4162-TS	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-4162-TS for HC-4162-DB box

OEM part number	HC-4162-TS	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line front for HC-4162-DB box (41 x 9-1/4 in W x D, 62 in H)	A	S463 oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Open question	*For HCWM (1200 A) the 1970 table prints only HC-41xx-TS (surface); was a flush version offered?*		

EDH-SQD-00861	HC-4180-TS	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HC-4180-TS for HC-4180-DB box

OEM part number	HC-4180-TS	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line front for HC-4180-DB box (41 x 9-1/4 in W x D, 80 in H)	A	S463 oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Open question	*For HCWM (1200 A) the 1970 table prints only HC-41xx-TS (surface); was a flush version offered?*		

EDH-SQD-00781	HCM48T	Square D	trim	STATUS UNKNOWN

I-Line 4-piece trim (front) for HC3248DB9 box, F/S

OEM part number	HCM48T	A	S27 Digest Sec.9 Tables 9.104/9.105; oem_spec
Alternate / superseded numbers	HCM48TF (flush)	A	S27 alias; oem_spec
	HCM48TS [alias] (surface)	A	same as above
	HCM48T( )D [alias] (trim with door)	A	same as above
Description	I-Line 4-piece trim without door for HC3248DB9 box; add F (flush) or S (surface); trim with door = suffix D (e.g. HCM48T( )D)	A	same as above
Fasteners	End and side trims fastened with #10-32 screws; door: hinge pin at top, 1/4-20 screw into threaded insert at bottom (HCP/HCR/HCW/HCWM); HCN/HCM doors hang on stud with latch brackets on left side trim; drill 11/64 in for extra holes in enclosure lip	A	S605, S606 80043-449-03, 80043-616-03; oem_spec
OEM instruction document	80043-449-03 (09/2003) / 80043-616-03 (07/2001) I-Line 4-piece trim and door kits; 80043-660-04 HCP trim kit	A	S605, S606, S604 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions		

EDH-SQD-00782	HCM73T	Square D	trim	STATUS UNKNOWN

I-Line 4-piece trim (front) for HC3273DB9 box, F/S

OEM part number	HCM73T	A	S27 Digest Sec.9 Tables 9.104/9.105; oem_spec
Alternate / superseded numbers	HCM73TF (flush)	A	S27 alias; oem_spec
	HCM73TS [alias] (surface)	A	same as above
	HCM73T( )D [alias] (trim with door)	A	same as above
Description	I-Line 4-piece trim without door for HC3273DB9 box; add F (flush) or S (surface); trim with door = suffix D (e.g. HCM73T( )D); I-Line Combo uses HCM73TV/HCM73TVD versions	A	same as above
Fasteners	End and side trims fastened with #10-32 screws; door: hinge pin at top, 1/4-20 screw into threaded insert at bottom (HCP/HCR/HCW/HCWM); HCN/HCM doors hang on stud with latch brackets on left side trim; drill 11/64 in for extra holes in enclosure lip	A	S605, S606 80043-449-03, 80043-616-03; oem_spec
OEM instruction document	80043-449-03 (09/2003) / 80043-616-03 (07/2001) I-Line 4-piece trim and door kits; 80043-660-04 HCP trim kit	A	S605, S606, S604 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions		

EDH-SQD-00783	HCM91T	Square D	trim	STATUS UNKNOWN

I-Line 4-piece trim (front) for HC3291DB9 box, F/S

OEM part number	HCM91T	A	S27 Digest Sec.9 Tables 9.104/9.105; oem_spec
Alternate / superseded numbers	HCM91TF (flush)	A	S27 alias; oem_spec
	HCM91TS [alias] (surface)	A	same as above
	HCM91T( )D [alias] (trim with door)	A	same as above
Description	I-Line 4-piece trim without door for HC3291DB9 box; add F (flush) or S (surface); trim with door = suffix D (e.g. HCM91T( )D); I-Line Combo uses HCM91TV/HCM91TVD versions	A	same as above
Fasteners	End and side trims fastened with #10-32 screws; door: hinge pin at top, 1/4-20 screw into threaded insert at bottom (HCP/HCR/HCW/HCWM); HCN/HCM doors hang on stud with latch brackets on left side trim; drill 11/64 in for extra holes in enclosure lip	A	S605, S606 80043-449-03, 80043-616-03; oem_spec
OEM instruction document	80043-449-03 (09/2003) / 80043-616-03 (07/2001) I-Line 4-piece trim and door kits; 80043-660-04 HCP trim kit	A	S605, S606, S604 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions		

EDH-SQD-00780	HCR86T	Square D	trim	STATUS UNKNOWN

I-Line 4-piece trim (front) for HC4486DB box, F/S

OEM part number	HCR86T	A	S27 Digest Sec.9 Tables 9.104/9.105; oem_spec
Alternate / superseded numbers	HCR86TF (flush)	A	S27 alias; oem_spec
	HCR86TS [alias] (surface)	A	same as above
	HCR86T( )D [alias] (trim with door)	A	same as above
Description	I-Line 4-piece trim without door for HC4486DB box; add F (flush) or S (surface); trim with door = suffix D (e.g. HCR86T( )D)	A	same as above
Fasteners	End and side trims fastened with #10-32 screws; door: hinge pin at top, 1/4-20 screw into threaded insert at bottom (HCP/HCR/HCW/HCWM); HCN/HCM doors hang on stud with latch brackets on left side trim; drill 11/64 in for extra holes in enclosure lip	A	S605, S606 80043-449-03, 80043-616-03; oem_spec
OEM instruction document	80043-449-03 (09/2003) / 80043-616-03 (07/2001) I-Line 4-piece trim and door kits; 80043-660-04 HCP trim kit	A	S605, S606, S604 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions		

EDH-SQD-00847	HCS-4144-TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HCS-4144-T for HC-4144-B box

OEM part number	HCS-4144-TF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HCS-4144-TS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-4144-B box (41 x 8 in W x D, 44 in H); catalog shown as HCS-4144-T( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00849	HCS-4153-TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HCS-4153-T for HC-4153-B box

OEM part number	HCS-4153-TF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HCS-4153-TS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-4153-B box (41 x 8 in W x D, 53 in H); catalog shown as HCS-4153-T( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00851	HCS-4162-TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HCS-4162-T for HC-4162-B box

OEM part number	HCS-4162-TF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HCS-4162-TS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-4162-B box (41 x 8 in W x D, 62 in H); catalog shown as HCS-4162-T( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00853	HCS-4180-TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line front HCS-4180-T for HC-4180-B box

OEM part number	HCS-4180-TF	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Alternate / superseded numbers	HCS-4180-TS (surface)	A	S463 alias; oem_spec
Description	I-Line front for HC-4180-B box (41 x 8 in W x D, 80 in H); catalog shown as HCS-4180-T( ) - add F for flush, S for surface	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		

EDH-SQD-00785	HCW50D	Square D	trim	STATUS UNKNOWN

I-Line add-on door kit (for HCW50TS trim)

OEM part number	HCW50D	A	S27 Digest footnotes [17], [22]; oem_spec
Description	Add-on door kit; example from Digest: for HCW50TS trim kit order HCW50D door kit	A	S27 oem_spec
Fasteners	Doors hang on hinge pin in top end trim and 1/4-20 screw into threaded insert at bottom (HCP/HCR/HCW/HCWM)	A	S605, S606 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	door kits for other heights (HCW59D, HCW68D?) not printed		

EDH-SQD-00776	HCW50T	Square D	trim	STATUS UNKNOWN

I-Line 4-piece trim (front) for HC4250DB box, F/S

OEM part number	HCW50T	A	S27 Digest Sec.9 Tables 9.104/9.105; oem_spec
Alternate / superseded numbers	HCW50TF (flush)	A	S27 alias; oem_spec
	HCW50TS [alias] (surface)	A	same as above
	HCW50T( )D [alias] (trim with door)	A	same as above
Description	I-Line 4-piece trim without door for HC4250DB box; add F (flush) or S (surface); trim with door = suffix D (e.g. HCW50T( )D)	A	same as above
Fasteners	End and side trims fastened with #10-32 screws; door: hinge pin at top, 1/4-20 screw into threaded insert at bottom (HCP/HCR/HCW/HCWM); HCN/HCM doors hang on stud with latch brackets on left side trim; drill 11/64 in for extra holes in enclosure lip	A	S605, S606 80043-449-03, 80043-616-03; oem_spec
OEM instruction document	80043-449-03 (09/2003) / 80043-616-03 (07/2001) I-Line 4-piece trim and door kits; 80043-660-04 HCP trim kit	A	S605, S606, S604 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions		

EDH-SQD-00777	HCW59T	Square D	trim	STATUS UNKNOWN

I-Line 4-piece trim (front) for HC4259DB box, F/S

OEM part number	HCW59T	A	S27 Digest Sec.9 Tables 9.104/9.105; oem_spec
Alternate / superseded numbers	HCW59TF (flush)	A	S27 alias; oem_spec
	HCW59TS [alias] (surface)	A	same as above
	HCW59T( )D [alias] (trim with door)	A	same as above
Description	I-Line 4-piece trim without door for HC4259DB box; add F (flush) or S (surface); trim with door = suffix D (e.g. HCW59T( )D)	A	same as above
Fasteners	End and side trims fastened with #10-32 screws; door: hinge pin at top, 1/4-20 screw into threaded insert at bottom (HCP/HCR/HCW/HCWM); HCN/HCM doors hang on stud with latch brackets on left side trim; drill 11/64 in for extra holes in enclosure lip	A	S605, S606 80043-449-03, 80043-616-03; oem_spec
OEM instruction document	80043-449-03 (09/2003) / 80043-616-03 (07/2001) I-Line 4-piece trim and door kits; 80043-660-04 HCP trim kit	A	S605, S606, S604 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions		

EDH-SQD-00778	HCW68T	Square D	trim	STATUS UNKNOWN

I-Line 4-piece trim (front) for HC4268DB box, F/S

OEM part number	HCW68T	A	S27 Digest Sec.9 Tables 9.104/9.105; oem_spec
Alternate / superseded numbers	HCW68TF (flush)	A	S27 alias; oem_spec
	HCW68TS [alias] (surface)	A	same as above
	HCW68T( )D [alias] (trim with door)	A	same as above
Description	I-Line 4-piece trim without door for HC4268DB box; add F (flush) or S (surface); trim with door = suffix D (e.g. HCW68T( )D)	A	same as above
Fasteners	End and side trims fastened with #10-32 screws; door: hinge pin at top, 1/4-20 screw into threaded insert at bottom (HCP/HCR/HCW/HCWM); HCN/HCM doors hang on stud with latch brackets on left side trim; drill 11/64 in for extra holes in enclosure lip	A	S605, S606 80043-449-03, 80043-616-03; oem_spec
OEM instruction document	80043-449-03 (09/2003) / 80043-616-03 (07/2001) I-Line 4-piece trim and door kits; 80043-660-04 HCP trim kit	A	S605, S606, S604 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions		

EDH-SQD-00786	HCW86D	Square D	trim	STATUS UNKNOWN

I-Line add-on door kit (for HCR86TS trim)

OEM part number	HCW86D	A	S27 Digest footnotes [17], [22]; oem_spec
Description	Add-on door kit; example from Digest: for HCR86TS trim kit order HCW86D door kit	A	S27 oem_spec
Fasteners	Doors hang on hinge pin in top end trim and 1/4-20 screw into threaded insert at bottom (HCP/HCR/HCW/HCWM)	A	S605, S606 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	door kits for other heights (HCW59D, HCW68D?) not printed		

EDH-SQD-00779	HCW86T	Square D	trim	STATUS UNKNOWN

I-Line 4-piece trim (front) for HC4286DB box, F/S

OEM part number	HCW86T	**A**	S27 Digest Sec.9 Tables 9.104/9.105; oem_spec
Alternate / superseded numbers	HCW86TF (flush)	**A**	S27 alias; oem_spec
	HCW86TS [alias] (surface)	**A**	same as above
	HCW86T( )D [alias] (trim with door)	**A**	same as above
Description	I-Line 4-piece trim without door for HC4286DB box; add F (flush) or S (surface); trim with door = suffix D (e.g. HCW86T( )D)	**A**	same as above
Fasteners	End and side trims fastened with #10-32 screws; door: hinge pin at top, 1/4-20 screw into threaded insert at bottom (HCP/HCR/HCW/HCWM); HCN/HCM doors hang on stud with latch brackets on left side trim; drill 11/64 in for extra holes in enclosure lip	**A**	S605, S606 80043-449-03, 80043-616-03; oem_spec
OEM instruction document	80043-449-03 (09/2003) / 80043-616-03 (07/2001) I-Line 4-piece trim and door kits; 80043-660-04 HCP trim kit	**A**	S605, S606, S604 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Dimensions		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00788	**HC2609DEXF**	I-Line box extension 9 in for HCP-SU (flush; S = surface)	—	unknown
EDH-SQD-00556	**HC-2609-EXF**	Square D I-Line panelboard box extension kit, HCN or NH1B 9 in high extension (flush)	—	1970 catalog item; current status unknown
EDH-SQD-00824	**HC-2636-B**	Legacy 1970 I-Line box HC-2636-B, 26 x 6-1/4 in W x D, 36 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00826	**HC-2645-B**	Legacy 1970 I-Line box HC-2645-B, 26 x 6-1/4 in W x D, 45 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00828	**HC-2654-B**	Legacy 1970 I-Line box HC-2654-B, 26 x 6-1/4 in W x D, 54 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00830	**HC-2663-B**	Legacy 1970 I-Line box HC-2663-B, 26 x 6-1/4 in W x D, 63 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00832	**HC-2672-B**	Legacy 1970 I-Line box HC-2672-B, 26 x 6-1/4 in W x D, 72 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00757	**HC2686DB**	I-Line NEMA 1 panelboard box HC2686DB (HCP-SU)	—	unknown
EDH-SQD-00775	**HC2686WP**	I-Line Type 3R/5/12 enclosure HC2686WP (I-Line Combo CP 18 in)	—	unknown
EDH-SQD-00834	**HC-2690-B**	Legacy 1970 I-Line box HC-2690-B, 26 x 6-1/4 in W x D, 90 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00774	**HC2886WP**	I-Line Type 3R/5/12 enclosure HC2886WP (HCP-SU)	—	unknown
EDH-SQD-00557	**HC-3209-EXF**	Square D I-Line panelboard box extension kit, HCM 9 in high extension (flush)	—	1970 catalog item; current status unknown
EDH-SQD-00836	**HC-3238-B**	Legacy 1970 I-Line box HC-3238-B, 32 x 8 in W x D, 38 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00838	**HC-3247-B**	Legacy 1970 I-Line box HC-3247-B, 32 x 8 in W x D, 47 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00758	**HC3248DB9**	I-Line NEMA 1 panelboard box HC3248DB9 (HCJ (27 in mtg))	—	unknown
EDH-SQD-00840	**HC-3256-B**	Legacy 1970 I-Line box HC-3256-B, 32 x 8 in W x D, 56 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00759	**HC3273DB9**	I-Line NEMA 1 panelboard box HC3273DB9 (HCJ / I-Line Combo CP 22.5 in)	—	unknown
EDH-SQD-00842	**HC-3274-B**	Legacy 1970 I-Line box HC-3274-B, 32 x 8 in W x D, 74 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00760	**HC3291DB9**	I-Line NEMA 1 panelboard box HC3291DB9 (HCJ / I-Line Combo CP 22.5 in)	—	unknown
EDH-SQD-00844	**HC-3292-B**	Legacy 1970 I-Line box HC-3292-B, 32 x 8 in W x D, 92 in H	—	Obsolete (1970 catalog item)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00559	**HC-4112-DEXF**	Square D I-Line panelboard box extension kit, HCWM 12 in high extension (flush)	—	1970 catalog item; current status unknown
EDH-SQD-00558	**HC-4112-EXF**	Square D I-Line panelboard box extension kit, HCW 12 in high extension (flush)	—	1970 catalog item; current status unknown
EDH-SQD-00846	**HC-4144-B**	Legacy 1970 I-Line box HC-4144-B, 41 x 8 in W x D, 44 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00854	**HC-4144-DB**	Legacy 1970 I-Line box HC-4144-DB, 41 x 9-1/4 in W x D, 44 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00848	**HC-4153-B**	Legacy 1970 I-Line box HC-4153-B, 41 x 8 in W x D, 53 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00856	**HC-4153-DB**	Legacy 1970 I-Line box HC-4153-DB, 41 x 9-1/4 in W x D, 53 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00850	**HC-4162-B**	Legacy 1970 I-Line box HC-4162-B, 41 x 8 in W x D, 62 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00858	**HC-4162-DB**	Legacy 1970 I-Line box HC-4162-DB, 41 x 9-1/4 in W x D, 62 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00852	**HC-4180-B**	Legacy 1970 I-Line box HC-4180-B, 41 x 8 in W x D, 80 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00860	**HC-4180-DB**	Legacy 1970 I-Line box HC-4180-DB, 41 x 9-1/4 in W x D, 80 in H	—	Obsolete (1970 catalog item)
EDH-SQD-00789	**HC4212DEXF**	I-Line box extension 12 in for HCP (flush; S = surface)	—	unknown
EDH-SQD-00761	**HC4250DB**	I-Line NEMA 1 panelboard box HC4250DB (HCP 27 in mtg)	—	unknown
EDH-SQD-00766	**HC4250WP**	I-Line Type 3R/5/12 enclosure HC4250WP (HCP)	—	unknown
EDH-SQD-00762	**HC4259DB**	I-Line NEMA 1 panelboard box HC4259DB (HCP 45 in mtg)	—	unknown
EDH-SQD-00767	**HC4259WP**	I-Line Type 3R/5/12 enclosure HC4259WP (HCP)	—	unknown
EDH-SQD-00763	**HC4268DB**	I-Line NEMA 1 panelboard box HC4268DB (HCP 63 in / 36 in MCB)	—	unknown
EDH-SQD-00768	**HC4268WP**	I-Line Type 3R/5/12 enclosure HC4268WP (HCP)	—	unknown
EDH-SQD-00764	**HC4286DB**	I-Line NEMA 1 panelboard box HC4286DB (HCP 99 in / 72 in MCB)	—	unknown
EDH-SQD-00769	**HC4286WP**	I-Line Type 3R/5/12 enclosure HC4286WP (HCP)	—	unknown
EDH-SQD-00790	**HC4406DEXF**	I-Line box extension 6 in for HCR-U (flush; S = surface)	—	unknown
EDH-SQD-00791	**HC4412DEXF**	I-Line box extension 12 in for HCR-U (flush; S = surface)	—	unknown
EDH-SQD-00765	**HC4486DB**	I-Line NEMA 1 panelboard box HC4486DB (HCR-U / I-Line Combo CP 31.5 in)	—	unknown
EDH-SQD-00770	**HC4486WP**	I-Line Type 3R/5/12 enclosure HC4486WP (HCR-U)	—	unknown
EDH-SQD-00771	**HCJ3248WP**	I-Line Type 3R/5/12 enclosure HCJ3248WP (HCJ)	—	unknown
EDH-SQD-00772	**HCJ3273WP**	I-Line Type 3R/5/12 enclosure HCJ3273WP (HCJ)	—	unknown
EDH-SQD-00773	**HCJ3291WP**	I-Line Type 3R/5/12 enclosure HCJ3291WP (HCJ)	—	unknown
EDH-SQD-00794	**HCT2DH26D9**	I-Line drip hood kit HCT2DH26D9 (HCP-SU, 26 in W x 9.5 in D)	—	unknown
EDH-SQD-00792	**HCT2DH32D9**	I-Line drip hood kit HCT2DH32D9 (HCJ, 32 in W x 9.5 in D)	—	unknown
EDH-SQD-00793	**HCT2DH42**	I-Line drip hood kit HCT2DH42 (HCP, 42 in W x 9.5 in D)	—	unknown
EDH-SQD-00797	**HCT2DH42D12**	I-Line drip hood kit HCT2DH42D12 (HCP (DB: deep box), 42 in W x 12.5 in D)	—	unknown
EDH-SQD-00798	**HCT2DH44**	I-Line drip hood kit HCT2DH44 (HCR-U, 44 in W x 9.5 in D)	—	unknown
EDH-SQD-00801	**HCT2DH44D12**	I-Line drip hood kit HCT2DH44D12 (HCR-U (DB), 44 in W x 12.5 in D)	—	unknown
EDH-SQD-00795	**HCT2DH47**	I-Line drip hood kit HCT2DH47 (HCP (L5: +5 in side extension), 47 in W x 9.5 in D)	—	unknown
EDH-SQD-00799	**HCT2DH49**	I-Line drip hood kit HCT2DH49 (HCR-U (L5), 49 in W x 9.5 in D)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00796	**HCT2DH56**	I-Line drip hood kit HCT2DH56 (HCP (PL: +14 in PowerLogic extension), 56 in W x 9.5 in D)	—	unknown
EDH-SQD-00800	**HCT2DH58**	I-Line drip hood kit HCT2DH58 (HCR-U (PL), 58 in W x 9.5 in D)	—	unknown

EDH-SQD-00788	HC2609DEXF	Square D	box/enclosure	STATUS UNKNOWN

I-Line box extension 9 in for HCP-SU (flush; S = surface)

OEM part number	HC2609DEXF	A	S27 Digest Sec.9 Table 9.114 p.9-58; oem_spec
Alternate / superseded numbers	HC2609DEXS (surface)	A	S27 alias; oem_spec
Description	I-Line box extension, 9 in, for HCP-SU interior; order with F (flush) or S (surface)	A	same as above
OEM instruction document	Generic box extension procedure 80043-350-04 (Class 1600): remove endwall, attach extension with #10-32 x 1/4 screws, refit endwall, attach extension front with #10-32 x 5/8 slotted screws (extra screw for 32, 42, 44 in wide fronts) (Bulletin prints no catalog numbers; applicability to I-Line HC extensions inferred from 32/42/44 in front widths)	C	S607 inference
Cross-links	Families: I-LINE		

EDH-SQD-00556	HC-2609-EXF	Square D	box/enclosure	1970 CATALOG ITEM; CUR

Square D I-Line panelboard box extension kit, HCN or NH1B 9 in high extension (flush)

OEM part number	HC-2609-EXF	A	S463 oem_spec
Alternate / superseded numbers	HC-2609-EXS [equivalent] ('F or S' suffix: S = surface version (inference: F=flush, S=surface, consistent with Digest front suffix convention))	A	same as above
Description	I-Line Panelboard Box Extension Kits: HCN or NH1B 9 in high extension - HC-2609-EXF or S, $51.00	A	S463 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE, NH1B		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00824	HC-2636-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-2636-B, 26 x 6-1/4 in W x D, 36 in H

OEM part number	HC-2636-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 26 x 6-1/4 in (W x D), 36 in high; used with interiors HCN-1436-2/-4/-6, HCN-0936-1M/-2M; branch breakers FA, FH, FY, Q2, Q2-H (225 A max branch)	A	S463 oem_spec
Dimensions	26 x 6-1/4 in W x D x 36 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00826	HC-2645-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-2645-B, 26 x 6-1/4 in W x D, 45 in H

OEM part number	HC-2645-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 26 x 6-1/4 in (W x D), 45 in high; used with interiors HCN-2345-2/-4/-6, HCN-1445-4M, HCN-1845-1M/-2M; branch breakers FA, FH, FY, Q2, Q2-H (225 A max branch)	A	S463 oem_spec
Dimensions	26 x 6-1/4 in W x D x 45 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00828	HC-2654-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-2654-B, 26 x 6-1/4 in W x D, 54 in H

OEM part number	HC-2654-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 26 x 6-1/4 in (W x D), 54 in high; used with interiors HCN-3254-2/-4/-6, HCN-2354-4M, HCN-2754-1M/-2M; branch breakers FA, FH, FY, Q2, Q2-H (225 A max branch)	A	S463 oem_spec
Dimensions	26 x 6-1/4 in W x D x 54 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00830	HC-2663-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-2663-B, 26 x 6-1/4 in W x D, 63 in H

OEM part number	HC-2663-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 26 x 6-1/4 in (W x D), 63 in high; used with interiors HCN-4163-2/-4/-6, HCN-3263-2M/-4M; branch breakers FA, FH, FY, Q2, Q2-H (225 A max branch)	A	S463 oem_spec
Dimensions	26 x 6-1/4 in W x D x 63 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00832	HC-2672-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-2672-B, 26 x 6-1/4 in W x D, 72 in H

OEM part number	HC-2672-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 26 x 6-1/4 in (W x D), 72 in high; used with interiors HCN-5072-2/-4/-6, HCN-4172-4M, HCN-4572-1M/-2M; branch breakers FA, FH, FY, Q2, Q2-H (225 A max branch)	A	S463 oem_spec
Dimensions	26 x 6-1/4 in W x D x 72 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00757	HC2686DB	Square D	box/enclosure	STATUS UNKNOWN

I-Line NEMA 1 panelboard box HC2686DB (HCP-SU)

OEM part number	HC2686DB	A	S27 Digest Sec.9 Tables 9.102, 9.104, 9.105 (pp.9-50..9-56); oem_spec
Description	I-Line merchandised NEMA Type 1 box for HCP-SU interiors; 26 x 86 (box height 86) (Box sizes per Digest headings: HCP 42 in W x 9.5 in D; HCR-U 44 in W x 9.5 in D; HC32xx = 32 in W (HCJ/HCM))	A	S27, S596 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	exact dimensions, knockouts		

EDH-SQD-00775	HC2686WP	Square D	box/enclosure	STATUS UNKNOWN

I-Line Type 3R/5/12 enclosure HC2686WP (I-Line Combo CP 18 in)

OEM part number	HC2686WP	A	S27 Digest Sec.9 Table 9.107 p.9-57; Tables 9.102/9.104; oem_spec
Description	I-Line Type 3R/5/12 enclosure for I-Line Combo CP 18 in interior (includes front); remove drain screws for Type 3R rating	A	S27 oem_spec
Cross-links	Families: I-LINE		

EDH-SQD-00834	HC-2690-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-2690-B, 26 x 6-1/4 in W x D, 90 in H

OEM part number	HC-2690-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 26 x 6-1/4 in (W x D), 90 in high; used with interiors HCN-6890-2/-4/-6, HCN-5990-4M, HCN-6390-1M/-2M; branch breakers FA, FH, FY, Q2, Q2-H (225 A max branch)	A	S463 oem_spec
Dimensions	26 x 6-1/4 in W x D x 90 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00774	HC2886WP	Square D	box/enclosure	STATUS UNKNOWN

I-Line Type 3R/5/12 enclosure HC2886WP (HCP-SU)

OEM part number	HC2886WP	A	S27 Digest Sec.9 Table 9.107 p.9-57; Tables 9.102/9.104; oem_spec
Description	I-Line Type 3R/5/12 enclosure for HCP-SU interior (includes front); remove drain screws for Type 3R rating	A	S27 oem_spec
Cross-links	Families: I-LINE		

EDH-SQD-00557	HC-3209-EXF	Square D	box/enclosure	1970 CATALOG ITEM; CUR

Square D I-Line panelboard box extension kit, HCM 9 in high extension (flush)

OEM part number	HC-3209-EXF	A	S463, S27 oem_spec
Alternate / superseded numbers	HC-3209-EXS ('F or S' suffix: S = surface version (inference: F=flush, S=surface, consistent with Digest front suffix convention))	A	S463 equivalent; oem_spec
	HC3209EXS (surface)	A	S27 alias; oem_spec
	HC-3209-EXF (Hyphenated legacy form already in catalogue from Digest 152)	B	S27, S463 alias; oem_spec
Description	I-Line Panelboard Box Extension Kits: HCM 9 in high extension - HC-3209-EXF or S, $51.00	A	S463 Digest 152 (1970) p.84; oem_spec
	I-Line box extension, 9 in, for HCJ interior; order with F (flush) or S (surface)	A	S27 oem_spec
OEM instruction document	Generic box extension procedure 80043-350-04 (Class 1600): remove endwall, attach extension with #10-32 x 1/4 screws, refit endwall, attach extension front with #10-32 x 5/8 slotted screws (extra screw for 32, 42, 44 in wide fronts) (Bulletin prints no catalog numbers; applicability to I-Line HC extensions inferred from 32/42/44 in front widths)	C	S607 inference
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00836	HC-3238-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-3238-B, 32 x 8 in W x D, 38 in H

OEM part number	HC-3238-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 32 x 8 in (W x D), 38 in high; used with interiors HCM-1438-2/-4/-6/-8, HCM-0938-2M; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH (225 A max branch)	A	S463 oem_spec
Dimensions	32 x 8 in W x D x 38 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00838	HC-3247-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-3247-B, 32 x 8 in W x D, 47 in H

OEM part number	HC-3247-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 32 x 8 in (W x D), 47 in high; used with interiors HCM-2347-2/-4/-6/-8, HCM-1447-4M, HCM-1847-2M; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH (225 A max branch)	A	S463 oem_spec
Dimensions	32 x 8 in W x D x 47 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00758	HC3248DB9	Square D	box/enclosure	STATUS UNKNOWN

I-Line NEMA 1 panelboard box HC3248DB9 (HCJ (27 in mtg))

OEM part number	HC3248DB9	A	S27 Digest Sec.9 Tables 9.102, 9.104, 9.105 (pp.9-50..9-56); oem_spec
Description	I-Line merchandised NEMA Type 1 box for HCJ (27 in mtg) interiors; 32 in W, 48 in H (Box sizes per Digest headings: HCP 42 in W x 9.5 in D; HCR-U 44 in W x 9.5 in D; HC32xx = 32 in W (HCJ/HCM))	A	S27 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	exact dimensions, knockouts		

EDH-SQD-00840	HC-3256-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-3256-B, 32 x 8 in W x D, 56 in H

OEM part number	HC-3256-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 32 x 8 in (W x D), 56 in high; used with interiors HCM-3256-2/-4/-6/-8, HCM-1856-6M/-8M, HCM-2356-4M, HCM-2756-2M; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH (225 A max branch)	A	S463 oem_spec
Dimensions	32 x 8 in W x D x 56 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00759	HC3273DB9	Square D	box/enclosure	STATUS UNKNOWN

I-Line NEMA 1 panelboard box HC3273DB9 (HCJ / I-Line Combo CP 22.5 in)

OEM part number	HC3273DB9	A	S27 Digest Sec.9 Tables 9.102, 9.104, 9.105 (pp.9-50..9-56); oem_spec
Description	I-Line merchandised NEMA Type 1 box for HCJ / I-Line Combo CP 22.5 in interiors; 32 in W, 73 in H (Box sizes per Digest headings: HCP 42 in W x 9.5 in D; HCR-U 44 in W x 9.5 in D; HC32xx = 32 in W (HCJ/HCM))	A	S27 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	exact dimensions, knockouts		

EDH-SQD-00842	HC-3274-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-3274-B, 32 x 8 in W x D, 74 in H

OEM part number	HC-3274-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 32 x 8 in (W x D), 74 in high; used with interiors HCM-5074-2/-4/-6/-8, HCM-3674-6M/-8M, HCM-4174-4M, HCM-4574-2M; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH (225 A max branch)	A	S463 oem_spec
Dimensions	32 x 8 in W x D x 74 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00760	HC3291DB9	Square D	box/enclosure	STATUS UNKNOWN

I-Line NEMA 1 panelboard box HC3291DB9 (HCJ / I-Line Combo CP 22.5 in)

OEM part number	HC3291DB9	A	S27 Digest Sec.9 Tables 9.102, 9.104, 9.105 (pp.9-50..9-56); oem_spec
Description	I-Line merchandised NEMA Type 1 box for HCJ / I-Line Combo CP 22.5 in interiors; 32 in W, 91 in H (Box sizes per Digest headings: HCP 42 in W x 9.5 in D; HCR-U 44 in W x 9.5 in D; HC32xx = 32 in W (HCJ/HCM))	A	S27 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	exact dimensions, knockouts		

EDH-SQD-00844	HC-3292-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-3292-B, 32 x 8 in W x D, 92 in H

OEM part number	HC-3292-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 32 x 8 in (W x D), 92 in high; used with interiors HCM-6892-2/-4/-6/-8, HCM-5492-6M/-8M, HCM-5992-4M, HCM-6392-2M; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH (225 A max branch)	A	S463 oem_spec
Dimensions	32 x 8 in W x D x 92 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00559	HC-4112-DEXF	Square D	box/enclosure	1970 CATALOG ITEM; CUR

Square D I-Line panelboard box extension kit, HCWM 12 in high extension (flush)

OEM part number	HC-4112-DEXF	A	S463 oem_spec
Alternate / superseded numbers	HC-4112-DEXS [equivalent] ('F or S' suffix: S = surface version (inference: F=flush, S=surface, consistent with Digest front suffix convention))	A	same as above
Description	I-Line Panelboard Box Extension Kits: HCWM 12 in high extension - HC-4112-DEXF or S, $51.00	A	S463 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00558	HC-4112-EXF	Square D	box/enclosure	1970 CATALOG ITEM; CUR

Square D I-Line panelboard box extension kit, HCW 12 in high extension (flush)

OEM part number	HC-4112-EXF	A	S463 oem_spec
Alternate / superseded numbers	HC-4112-EXS [equivalent] ('F or S' suffix: S = surface version (inference: F=flush, S=surface, consistent with Digest front suffix convention))	A	same as above
Description	I-Line Panelboard Box Extension Kits: HCW 12 in high extension - HC-4112-EXF or S, $51.00	A	S463 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00846	HC-4144-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-4144-B, 41 x 8 in W x D, 44 in H

OEM part number	HC-4144-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 41 x 8 in (W x D), 44 in high; used with interiors HCW-1444-4/-6/-8; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH, LA, LH (400 A max branch)	A	S463 oem_spec
Dimensions	41 x 8 in W x D x 44 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00854	HC-4144-DB	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-4144-DB, 41 x 9-1/4 in W x D, 44 in H

OEM part number	HC-4144-DB	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 41 x 9-1/4 in (W x D), 44 in high; used with interiors HCWM-1444-12N; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH, LA, LH, MA, MH (800 A max branch; 1200 A mains)	A	S463 oem_spec
Dimensions	41 x 9-1/4 in W x D x 44 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00848	HC-4153-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-4153-B, 41 x 8 in W x D, 53 in H

OEM part number	HC-4153-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 41 x 8 in (W x D), 53 in high; used with interiors HCW-2353-4/-6/-8; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH, LA, LH (400 A max branch)	A	S463 oem_spec
Dimensions	41 x 8 in W x D x 53 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00856	HC-4153-DB	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-4153-DB, 41 x 9-1/4 in W x D, 53 in H

OEM part number	HC-4153-DB	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 41 x 9-1/4 in (W x D), 53 in high; used with interiors HCWM-2353-12N; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH, LA, LH, MA, MH (800 A max branch; 1200 A mains)	A	S463 oem_spec
Dimensions	41 x 9-1/4 in W x D x 53 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00850	HC-4162-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-4162-B, 41 x 8 in W x D, 62 in H

OEM part number	HC-4162-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 41 x 8 in (W x D), 62 in high; used with interiors HCW-3262-4/-6/-8, HCW-1862-6M/-8M; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH, LA, LH (400 A max branch)	A	S463 oem_spec
Dimensions	41 x 8 in W x D x 62 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00858	HC-4162-DB	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-4162-DB, 41 x 9-1/4 in W x D, 62 in H

OEM part number	HC-4162-DB	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 41 x 9-1/4 in (W x D), 62 in high; used with interiors HCWM-3262-12N; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH, LA, LH, MA, MH (800 A max branch; 1200 A mains)	A	S463 oem_spec
Dimensions	41 x 9-1/4 in W x D x 62 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00852	HC-4180-B	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-4180-B, 41 x 8 in W x D, 80 in H

OEM part number	HC-4180-B	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 41 x 8 in (W x D), 80 in high; used with interiors HCW-5080-4/-6/-8; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH, LA, LH (400 A max branch)	A	S463 oem_spec
Dimensions	41 x 8 in W x D x 80 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00860	HC-4180-DB	Square D	box/enclosure	OBSOLETE (1970 CATALOG

Legacy 1970 I-Line box HC-4180-DB, 41 x 9-1/4 in W x D, 80 in H

OEM part number	HC-4180-DB	A	S463 Digest 152 (1970) p.72 (leaf 73) main lugs table; p.73 (leaf 74) main breaker table; oem_spec
Description	I-Line unassembled-type panelboard box (1970), box size 41 x 9-1/4 in (W x D), 80 in high; used with interiors HCWM-5080-12N; branch breakers FA, FH, FY, Q2, Q2-H, KA, KH, LA, LH, MA, MH (800 A max branch; 1200 A mains)	A	S463 oem_spec
Dimensions	41 x 9-1/4 in W x D x 80 in H	A	same as above
Status	Obsolete (1970 catalog item)	B	S463 inference
Replacement / successor	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C	S463, S27 inference
Cross-links	Families: I-LINE · Breakers: FA / FH (I-Line)		
Not yet documented	gauge, knockouts		

EDH-SQD-00789	HC4212DEXF	Square D	box/enclosure	STATUS UNKNOWN

I-Line box extension 12 in for HCP (flush; S = surface)

OEM part number	HC4212DEXF	A	S27 Digest Sec.9 Table 9.114 p.9-58; oem_spec
Alternate / superseded numbers	HC4212DEXS (surface)	A	S27 alias; oem_spec
Description	I-Line box extension, 12 in, for HCP interior; order with F (flush) or S (surface)	A	same as above
OEM instruction document	Generic box extension procedure 80043-350-04 (Class 1600): remove endwall, attach extension with #10-32 x 1/4 screws, refit endwall, attach extension front with #10-32 x 5/8 slotted screws (extra screw for 32, 42, 44 in wide fronts) (Bulletin prints no catalog numbers; applicability to I-Line HC extensions inferred from 32/42/44 in front widths)	C	S607 inference
Cross-links	Families: I-LINE		

EDH-SQD-00761	HC4250DB	Square D	box/enclosure	STATUS UNKNOWN

I-Line NEMA 1 panelboard box HC4250DB (HCP 27 in mtg)

OEM part number	HC4250DB	A	S27 Digest Sec.9 Tables 9.102, 9.104, 9.105 (pp.9-50..9-56); oem_spec
Description	I-Line merchandised NEMA Type 1 box for HCP 27 in mtg interiors; 42 in W x 9.5 in D, 50 in H (Box sizes per Digest headings: HCP 42 in W x 9.5 in D; HCR-U 44 in W x 9.5 in D; HC32xx = 32 in W (HCJ/HCM))	A	S27 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	exact dimensions, knockouts		

EDH-SQD-00766	HC4250WP	Square D	box/enclosure	STATUS UNKNOWN

I-Line Type 3R/5/12 enclosure HC4250WP (HCP)

OEM part number	HC4250WP	A	S27 Digest Sec.9 Table 9.107 p.9-57; Tables 9.102/9.104; oem_spec
Description	I-Line Type 3R/5/12 enclosure for HCP interior (includes front); remove drain screws for Type 3R rating	A	S27 oem_spec
Dimensions	H x W x D = 50 x 43.19 x 12.95 in	A	S27 Table 9.107; oem_spec
Cross-links	Families: I-LINE		

EDH-SQD-00762	HC4259DB	Square D	box/enclosure	STATUS UNKNOWN

I-Line NEMA 1 panelboard box HC4259DB (HCP 45 in mtg)

OEM part number	HC4259DB	A	S27 Digest Sec.9 Tables 9.102, 9.104, 9.105 (pp.9-50..9-56); oem_spec
Description	I-Line merchandised NEMA Type 1 box for HCP 45 in mtg interiors; 42 in W x 9.5 in D, 59 in H (Box sizes per Digest headings: HCP 42 in W x 9.5 in D; HCR-U 44 in W x 9.5 in D; HC32xx = 32 in W (HCJ/HCM))	A	S27 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	exact dimensions, knockouts		

EDH-SQD-00767	HC4259WP	Square D	box/enclosure	STATUS UNKNOWN

I-Line Type 3R/5/12 enclosure HC4259WP (HCP)

OEM part number	HC4259WP	A	S27 Digest Sec.9 Table 9.107 p.9-57; Tables 9.102/9.104; oem_spec
Description	I-Line Type 3R/5/12 enclosure for HCP interior (includes front); remove drain screws for Type 3R rating	A	S27 oem_spec
Dimensions	H x W x D = 59 x 43.19 x 12.95 in	A	S27 Table 9.107; oem_spec
Cross-links	Families: I-LINE		

EDH-SQD-00763	HC4268DB	Square D	box/enclosure	STATUS UNKNOWN

I-Line NEMA 1 panelboard box HC4268DB (HCP 63 in / 36 in MCB)

OEM part number	HC4268DB	A	S27 Digest Sec.9 Tables 9.102, 9.104, 9.105 (pp.9-50..9-56); oem_spec
Description	I-Line merchandised NEMA Type 1 box for HCP 63 in / 36 in MCB interiors; 42 in W x 9.5 in D, 68 in H (Box sizes per Digest headings: HCP 42 in W x 9.5 in D; HCR-U 44 in W x 9.5 in D; HC32xx = 32 in W (HCJ/HCM))	A	S27 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	exact dimensions, knockouts		

EDH-SQD-00768	HC4268WP	Square D	box/enclosure	STATUS UNKNOWN

I-Line Type 3R/5/12 enclosure HC4268WP (HCP)

OEM part number	HC4268WP	A	S27 Digest Sec.9 Table 9.107 p.9-57; Tables 9.102/9.104; oem_spec
Description	I-Line Type 3R/5/12 enclosure for HCP interior (includes front); remove drain screws for Type 3R rating	A	S27 oem_spec
Dimensions	H x W x D = 68 x 43.19 x 12.95 in	A	S27 Table 9.107; oem_spec
Cross-links	Families: I-LINE		

EDH-SQD-00764	HC4286DB	Square D	box/enclosure	STATUS UNKNOWN

I-Line NEMA 1 panelboard box HC4286DB (HCP 99 in / 72 in MCB)

OEM part number	HC4286DB	A	S27 Digest Sec.9 Tables 9.102, 9.104, 9.105 (pp.9-50..9-56); oem_spec
Description	I-Line merchandised NEMA Type 1 box for HCP 99 in / 72 in MCB interiors; 42 in W x 9.5 in D, 86 in H (Box sizes per Digest headings: HCP 42 in W x 9.5 in D; HCR-U 44 in W x 9.5 in D; HC32xx = 32 in W (HCJ/HCM))	A	S27 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	exact dimensions, knockouts		

EDH-SQD-00769	HC4286WP	Square D	box/enclosure	STATUS UNKNOWN

I-Line Type 3R/5/12 enclosure HC4286WP (HCP)

OEM part number	HC4286WP	A	S27 Digest Sec.9 Table 9.107 p.9-57; Tables 9.102/9.104; oem_spec
Description	I-Line Type 3R/5/12 enclosure for HCP interior (includes front); remove drain screws for Type 3R rating	A	S27 oem_spec
Dimensions	H x W x D = 86 x 43.19 x 12.95 in	A	S27 Table 9.107; oem_spec
Cross-links	Families: I-LINE		

EDH-SQD-00790	HC4406DEXF	Square D	box/enclosure	STATUS UNKNOWN

I-Line box extension 6 in for HCR-U (flush; S = surface)

OEM part number	HC4406DEXF	A	S27 Digest Sec.9 Table 9.114 p.9-58; oem_spec
Alternate / superseded numbers	HC4406DEXS (surface)	A	S27 alias; oem_spec
Description	I-Line box extension, 6 in, for HCR-U interior; order with F (flush) or S (surface)	A	same as above
OEM instruction document	Generic box extension procedure 80043-350-04 (Class 1600): remove endwall, attach extension with #10-32 x 1/4 screws, refit endwall, attach extension front with #10-32 x 5/8 slotted screws (extra screw for 32, 42, 44 in wide fronts) (Bulletin prints no catalog numbers; applicability to I-Line HC extensions inferred from 32/42/44 in front widths)	C	S607 inference
Cross-links	Families: I-LINE		

EDH-SQD-00791	HC4412DEXF	Square D	box/enclosure	STATUS UNKNOWN

I-Line box extension 12 in for HCR-U (flush; S = surface)

OEM part number	HC4412DEXF	A	S27 Digest Sec.9 Table 9.114 p.9-58; oem_spec
Alternate / superseded numbers	HC4412DEXS (surface)	A	S27 alias; oem_spec
Description	I-Line box extension, 12 in, for HCR-U interior; order with F (flush) or S (surface)	A	same as above
OEM instruction document	Generic box extension procedure 80043-350-04 (Class 1600): remove endwall, attach extension with #10-32 x 1/4 screws, refit endwall, attach extension front with #10-32 x 5/8 slotted screws (extra screw for 32, 42, 44 in wide fronts) (Bulletin prints no catalog numbers; applicability to I-Line HC extensions inferred from 32/42/44 in front widths)	C	S607 inference
Cross-links	Families: I-LINE		

EDH-SQD-00765	HC4486DB	Square D	box/enclosure	STATUS UNKNOWN

I-Line NEMA 1 panelboard box HC4486DB (HCR-U / I-Line Combo CP 31.5 in)

OEM part number	HC4486DB	A	S27 Digest Sec.9 Tables 9.102, 9.104, 9.105 (pp.9-50..9-56); oem_spec
Description	I-Line merchandised NEMA Type 1 box for HCR-U / I-Line Combo CP 31.5 in interiors; 44 in W x 9.5 in D, 86 in H (Box sizes per Digest headings: HCP 42 in W x 9.5 in D; HCR-U 44 in W x 9.5 in D; HC32xx = 32 in W (HCJ/HCM))	A	S27 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	exact dimensions, knockouts		

EDH-SQD-00770	HC4486WP	Square D	box/enclosure	STATUS UNKNOWN

I-Line Type 3R/5/12 enclosure HC4486WP (HCR-U)

OEM part number	HC4486WP	A	S27 Digest Sec.9 Table 9.107 p.9-57; Tables 9.102/9.104; oem_spec
Description	I-Line Type 3R/5/12 enclosure for HCR-U interior (includes front); remove drain screws for Type 3R rating	A	S27 oem_spec
Dimensions	H x W x D = 86 x 45.19 x 14.63 in	A	S27 Table 9.107; oem_spec
Cross-links	Families: I-LINE		

EDH-SQD-00771	HCJ3248WP	Square D	box/enclosure	STATUS UNKNOWN

I-Line Type 3R/5/12 enclosure HCJ3248WP (HCJ)

OEM part number	HCJ3248WP	A	S27 Digest Sec.9 Table 9.107 p.9-57; Tables 9.102/9.104; oem_spec
Description	I-Line Type 3R/5/12 enclosure for HCJ interior (includes front); remove drain screws for Type 3R rating	A	S27 oem_spec
Cross-links	Families: I-LINE		

EDH-SQD-00772	HCJ3273WP	Square D	box/enclosure	STATUS UNKNOWN

I-Line Type 3R/5/12 enclosure HCJ3273WP (HCJ)

OEM part number	HCJ3273WP	A	S27 Digest Sec.9 Table 9.107 p.9-57; Tables 9.102/9.104; oem_spec
Description	I-Line Type 3R/5/12 enclosure for HCJ interior (includes front); remove drain screws for Type 3R rating	A	S27 oem_spec
Cross-links	Families: I-LINE		

EDH-SQD-00773	HCJ3291WP	Square D	box/enclosure	STATUS UNKNOWN

I-Line Type 3R/5/12 enclosure HCJ3291WP (HCJ)

OEM part number	HCJ3291WP	**A**	S27 Digest Sec.9 Table 9.107 p.9-57; Tables 9.102/9.104; oem_spec
Description	I-Line Type 3R/5/12 enclosure for HCJ interior (includes front); remove drain screws for Type 3R rating	**A**	S27 oem_spec
Cross-links	Families: I-LINE		

EDH-SQD-00794	HCT2DH26D9	Square D	box/enclosure	STATUS UNKNOWN

I-Line drip hood kit HCT2DH26D9 (HCP-SU, 26 in W x 9.5 in D)

OEM part number	HCT2DH26D9	**A**	S27 Digest Sec.9 Table 9.115 p.9-58; oem_spec
Description	Drip hood for surface-mounted HC boxes only; fits outside the box; raises enclosure rating from Type 1 to Type 2; interior type HCP-SU	**A**	S27 oem_spec
Dimensions	Box width 26 in, depth 9.5 in	**A**	same as above
OEM instruction document	Instruction Bulletin 80043-401-03 (not retrieved)	**A**	same as above
Cross-links	Families: I-LINE		

EDH-SQD-00792	HCT2DH32D9	Square D	box/enclosure	STATUS UNKNOWN

I-Line drip hood kit HCT2DH32D9 (HCJ, 32 in W x 9.5 in D)

OEM part number	HCT2DH32D9	**A**	S27 Digest Sec.9 Table 9.115 p.9-58; oem_spec
Description	Drip hood for surface-mounted HC boxes only; fits outside the box; raises enclosure rating from Type 1 to Type 2; interior type HCJ	**A**	S27 oem_spec
Dimensions	Box width 32 in, depth 9.5 in	**A**	same as above
OEM instruction document	Instruction Bulletin 80043-401-03 (not retrieved)	**A**	same as above
Cross-links	Families: I-LINE		

EDH-SQD-00793	HCT2DH42	Square D	box/enclosure	STATUS UNKNOWN

I-Line drip hood kit HCT2DH42 (HCP, 42 in W x 9.5 in D)

OEM part number	HCT2DH42	**A**	S27 Digest Sec.9 Table 9.115 p.9-58; oem_spec
Description	Drip hood for surface-mounted HC boxes only; fits outside the box; raises enclosure rating from Type 1 to Type 2; interior type HCP	**A**	S27 oem_spec
Dimensions	Box width 42 in, depth 9.5 in	**A**	same as above
OEM instruction document	Instruction Bulletin 80043-401-03 (not retrieved)	**A**	same as above
Cross-links	Families: I-LINE		

EDH-SQD-00797	HCT2DH42D12	Square D	box/enclosure	STATUS UNKNOWN

I-Line drip hood kit HCT2DH42D12 (HCP (DB: deep box), 42 in W x 12.5 in D)

OEM part number	HCT2DH42D12	**A**	S27 Digest Sec.9 Table 9.115 p.9-58; oem_spec
Description	Drip hood for surface-mounted HC boxes only; fits outside the box; raises enclosure rating from Type 1 to Type 2; interior type HCP (DB: deep box)	**A**	S27 oem_spec
Dimensions	Box width 42 in, depth 12.5 in	**A**	same as above
OEM instruction document	Instruction Bulletin 80043-401-03 (not retrieved)	**A**	same as above
Cross-links	Families: I-LINE		

EDH-SQD-00798	HCT2DH44	Square D	box/enclosure	STATUS UNKNOWN

I-Line drip hood kit HCT2DH44 (HCR-U, 44 in W x 9.5 in D)

OEM part number	HCT2DH44	A	S27 Digest Sec.9 Table 9.115 p.9-58; oem_spec
Description	Drip hood for surface-mounted HC boxes only; fits outside the box; raises enclosure rating from Type 1 to Type 2; interior type HCR-U	A	S27 oem_spec
Dimensions	Box width 44 in, depth 9.5 in	A	same as above
OEM instruction document	Instruction Bulletin 80043-401-03 (not retrieved)	A	same as above
Cross-links	Families: I-LINE		

EDH-SQD-00801	HCT2DH44D12	Square D	box/enclosure	STATUS UNKNOWN

I-Line drip hood kit HCT2DH44D12 (HCR-U (DB), 44 in W x 12.5 in D)

OEM part number	HCT2DH44D12	A	S27 Digest Sec.9 Table 9.115 p.9-58; oem_spec
Description	Drip hood for surface-mounted HC boxes only; fits outside the box; raises enclosure rating from Type 1 to Type 2; interior type HCR-U (DB)	A	S27 oem_spec
Dimensions	Box width 44 in, depth 12.5 in	A	same as above
OEM instruction document	Instruction Bulletin 80043-401-03 (not retrieved)	A	same as above
Cross-links	Families: I-LINE		

EDH-SQD-00795	HCT2DH47	Square D	box/enclosure	STATUS UNKNOWN

I-Line drip hood kit HCT2DH47 (HCP (L5: +5 in side extension), 47 in W x 9.5 in D)

OEM part number	HCT2DH47	A	S27 Digest Sec.9 Table 9.115 p.9-58; oem_spec
Description	Drip hood for surface-mounted HC boxes only; fits outside the box; raises enclosure rating from Type 1 to Type 2; interior type HCP (L5: +5 in side extension)	A	S27 oem_spec
Dimensions	Box width 47 in, depth 9.5 in	A	same as above
OEM instruction document	Instruction Bulletin 80043-401-03 (not retrieved)	A	same as above
Cross-links	Families: I-LINE		

EDH-SQD-00799	HCT2DH49	Square D	box/enclosure	STATUS UNKNOWN

I-Line drip hood kit HCT2DH49 (HCR-U (L5), 49 in W x 9.5 in D)

OEM part number	HCT2DH49	A	S27 Digest Sec.9 Table 9.115 p.9-58; oem_spec
Description	Drip hood for surface-mounted HC boxes only; fits outside the box; raises enclosure rating from Type 1 to Type 2; interior type HCR-U (L5)	A	S27 oem_spec
Dimensions	Box width 49 in, depth 9.5 in	A	same as above
OEM instruction document	Instruction Bulletin 80043-401-03 (not retrieved)	A	same as above
Cross-links	Families: I-LINE		

EDH-SQD-00796	HCT2DH56	Square D	box/enclosure	STATUS UNKNOWN

I-Line drip hood kit HCT2DH56 (HCP (PL: +14 in PowerLogic extension), 56 in W x 9.5 in D)

OEM part number	HCT2DH56	A	S27 Digest Sec.9 Table 9.115 p.9-58; oem_spec
Description	Drip hood for surface-mounted HC boxes only; fits outside the box; raises enclosure rating from Type 1 to Type 2; interior type HCP (PL: +14 in PowerLogic extension)	A	S27 oem_spec
Dimensions	Box width 56 in, depth 9.5 in	A	same as above
OEM instruction document	Instruction Bulletin 80043-401-03 (not retrieved)	A	same as above
Cross-links	Families: I-LINE		

EDH-SQD-00800	HCT2DH58	Square D	box/enclosure	STATUS UNKNOWN

I-Line drip hood kit HCT2DH58 (HCR-U (PL), 58 in W x 9.5 in D)

OEM part number	HCT2DH58	A	S27 Digest Sec.9 Table 9.115 p.9-58; oem_spec
Description	Drip hood for surface-mounted HC boxes only; fits outside the box; raises enclosure rating from Type 1 to Type 2; interior type HCR-U (PL)	A	S27 oem_spec
Dimensions	Box width 58 in, depth 9.5 in	A	same as above
OEM instruction document	Instruction Bulletin 80043-401-03 (not retrieved)	A	same as above
Cross-links	Families: I-LINE		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00150	**PJC-7201**	I-Line plug-on connector joint compound, 2 oz	—	referenced in 2026 manual

EDH-SQD-00150	PJC-7201	Square D	hardware-kit	REFERENCED IN 2026 MAN

I-Line plug-on connector joint compound, 2 oz

OEM part number	PJC-7201	A	S31 oem_spec
Alternate / superseded numbers	PJC7201	A	S430, S431 alias; p.1-2; oem_spec
Description	Joint compound for I-Line plug-on connectors; must be reapplied whenever a breaker is removed and reinstalled	A	S31 p. 13; oem_spec
	Square D electric joint compound for I-Line plug-on connections (sub-feed lug jaws; QED-2 bus plug-on connections)	A	S430, S431, S429 48049-250-01 p.1; 48040-651-03 p.2; 80043-055-13 p.41; oem_spec
Status	referenced in 2026 manual	A	S31 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00360	**2152620361**	FA/FH I-Line breaker mounting bracket screw 2152620361	FA, FH I-Line A	unknown
EDH-SQD-00359	**21590-20241**	PowerPact H/J I-Line mounting bracket screw 21590-20241	PowerPact H- and J-frame I-Line breakers (mounting bracket/foot to int A	unknown
EDH-SQD-00357	**21593-20100**	I-Line blank filler mounting screw 21593-20100	—	unknown
EDH-SQD-00362	**8011417101**	Slotted Roberts-head screw 8011417101 for I-Line deadfront bracket	—	unknown
EDH-SQD-00363	**PKDFSCREW**	Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)	—	current (80025-067-01 obsolete)

EDH-SQD-00360	2152620361	Square D	fastener	STATUS UNKNOWN

FA/FH I-Line breaker mounting bracket screw 2152620361

OEM part number	2152620361	A	S107 oem_spec
Description	Mounting bracket (mounting foot) screw for FA or FH I-Line breaker	A	same as above
Breaker compatibility	FA, FH I-Line	A	same as above
Cross-links	Families: I-LINE, QED-2 · Breakers: FA / FH (I-Line)		
Not yet documented	length, thread		

EDH-SQD-00359	21590-20241	Square D	fastener	STATUS UNKNOWN

PowerPact H/J I-Line mounting bracket screw 21590-20241

OEM part number	21590-20241	A	S106 oem_spec
Description	Pan head steel thread-forming trilobe screw, combination slot / #3 square recess, ANSI B18.6.4, 1/4-20 x 0.75 in. (+.00/-.03)	A	same as above
Installation location	Load-end mounting bracket of I-Line breaker into interior mounting pan	A	S106, S95 oem_spec
Breaker compatibility	PowerPact H- and J-frame I-Line breakers (mounting bracket/foot to interior pan)	A	S106 oem_spec
Cross-links	Families: I-LINE, QED-2 · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Finish / plating		

EDH-SQD-00357	21593-20100	Square D	fastener	STATUS UNKNOWN

I-Line blank filler mounting screw 21593-20100

OEM part number	21593-20100	A	S101 oem_spec
Description	Screw securing HNM1BL/HNM4BL blank fillers to I-Line interior mounting pan	A	same as above
Application	accessory hardware	A	same as above
Cross-links	Families: I-LINE, QED-2		
Not yet documented	length, thread size		

EDH-SQD-00362	8011417101	Square D	fastener	STATUS UNKNOWN

Slotted Roberts-head screw 8011417101 for I-Line deadfront bracket

OEM part number	8011417101	A	S110 oem_spec
Description	Slotted Roberts (square) head screw used with trim support bracket 4051749901 on HCN3254-2	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	length, thread		

EDH-SQD-00363	PKDFSCREW	Square D	fastener	CURRENT (80025-067-01

Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)

OEM part number	PKDFSCREW	A	S115 oem_spec
Alternate / superseded numbers	80025-067-01 [supersedes] (Obsolete original deadfront screw)	A	same as above
Description	Deadfront screw used on NF, I-Line, NQ and QMB panels; PKDFSCREW is a kit of 8	A	same as above
Status	current (80025-067-01 obsolete)	A	same as above
Cross-links	Families: I-LINE, QMB		
Not yet documented	length, thread size		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00950	**LA11021**	Square D field-installable shunt trip 120/208/240 Vac, LA/LH/Q4	LA, LH (Series 4 or later), Q4 **B**	unknown
EDH-SQD-00953	**LA11027**	Square D field-installable shunt trip 24 Vdc, LA/LH/Q4	LA, LH (Series 4 or later), Q4 **B**	unknown
EDH-SQD-00954	**LA11028**	Square D field-installable shunt trip 48 Vdc, LA/LH/Q4	LA, LH (Series 4 or later), Q4 **B**	unknown
EDH-SQD-00955	**LA11029**	Square D field-installable shunt trip 125 Vdc, LA/LH/Q4	LA, LH (Series 4 or later), Q4 **B**	unknown
EDH-SQD-00952	**LA11037**	Square D field-installable shunt trip 277/480 Vac, LA/LH/Q4	LA, LH (Series 4 or later), Q4 **B**	unknown
EDH-SQD-00951	**LA11042**	Square D field-installable shunt trip 24 Vac, LA/LH/Q4	LA, LH (Series 4 or later), Q4 **B**	unknown
EDH-SQD-00956	**LA11121**	Square D field-installable undervoltage trip 120 Vac, LA/LH/Q4	LA, LH (Series 4 or later), Q4 **B**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00957	**LA11124**	Square D field-installable undervoltage trip 240 Vac, LA/LH/Q4	LA, LH (Series 4 or later), Q4 **B**	unknown
EDH-SQD-00948	**LA11212**	Square D field-installable auxiliary switch 1A/1B, LA/LH/Q4	LA, LH (Series 4 or later), Q4 **A**	unknown
EDH-SQD-00949	**LA11352**	Square D field-installable auxiliary switch 2A/2B, LA/LH/Q4	LA, LH (Series 4 or later), Q4 **B**	unknown
EDH-SQD-00958	**LA1G**	Square D field-installable ground-fault shunt trip (obsolete GP Ground-Censor / add-on GF module use), LA/LH/Q4	LA, LH (Series 4 or later), Q4 **A**	unknown

EDH-SQD-00950	**LA11021**	Square D	breaker-accessory	STATUS UNKNOWN

Square D field-installable shunt trip 120/208/240 Vac, LA/LH/Q4

OEM part number	LA11021	**B**	S183 p. 3-23, Table 3.61 Field-Installable Accessories (suffix codes from Table 3.60 p. 3-22); oem_spec
Description	shunt trip 120/208/240 Vac. Field-installable accessory catalog number = LA1 + suffix from Table 3.60 (OEM example: LA11212). Field-installable on LA/LH/Q4 Series 4 or newer (not LA/LH top-feed MT); both accessory ports accept shunt trips, UVRs and aux switches; alarm switch factory only.	**B**	same as above
Application	accessory	**B**	same as above
Breaker compatibility	LA, LH (Series 4 or later), Q4	**B**	same as above
Cross-links	Families: I-LINE, NF · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Status		
Open question	*Catalog number constructed from the OEM LA1( ) + suffix rule; not printed verbatim - verify.*		

EDH-SQD-00953	**LA11027**	Square D	breaker-accessory	STATUS UNKNOWN

Square D field-installable shunt trip 24 Vdc, LA/LH/Q4

OEM part number	LA11027	**B**	S183 p. 3-23, Table 3.61 Field-Installable Accessories (suffix codes from Table 3.60 p. 3-22); oem_spec
Description	shunt trip 24 Vdc. Field-installable accessory catalog number = LA1 + suffix from Table 3.60 (OEM example: LA11212). Field-installable on LA/LH/Q4 Series 4 or newer (not LA/LH top-feed MT); both accessory ports accept shunt trips, UVRs and aux switches; alarm switch factory only.	**B**	same as above
Application	accessory	**B**	same as above
Breaker compatibility	LA, LH (Series 4 or later), Q4	**B**	same as above
Cross-links	Families: I-LINE, NF · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Status		
Open question	*Catalog number constructed from the OEM LA1( ) + suffix rule; not printed verbatim - verify.*		

EDH-SQD-00954	LA11028	Square D	breaker-accessory	STATUS UNKNOWN

Square D field-installable shunt trip 48 Vdc, LA/LH/Q4

OEM part number	LA11028	B	S183 p. 3-23, Table 3.61 Field-Installable Accessories (suffix codes from Table 3.60 p. 3-22); oem_spec
Description	shunt trip 48 Vdc. Field-installable accessory catalog number = LA1 + suffix from Table 3.60 (OEM example: LA11212). Field-installable on LA/LH/Q4 Series 4 or newer (not LA/LH top-feed MT); both accessory ports accept shunt trips, UVRs and aux switches; alarm switch factory only.	B	same as above
Application	accessory	B	same as above
Breaker compatibility	LA, LH (Series 4 or later), Q4	B	same as above
Cross-links	Families: I-LINE, NF · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Status		
Open question	*Catalog number constructed from the OEM LA1( ) + suffix rule; not printed verbatim - verify.*		

EDH-SQD-00955	LA11029	Square D	breaker-accessory	STATUS UNKNOWN

Square D field-installable shunt trip 125 Vdc, LA/LH/Q4

OEM part number	LA11029	B	S183 p. 3-23, Table 3.61 Field-Installable Accessories (suffix codes from Table 3.60 p. 3-22); oem_spec
Description	shunt trip 125 Vdc. Field-installable accessory catalog number = LA1 + suffix from Table 3.60 (OEM example: LA11212). Field-installable on LA/LH/Q4 Series 4 or newer (not LA/LH top-feed MT); both accessory ports accept shunt trips, UVRs and aux switches; alarm switch factory only.	B	same as above
Application	accessory	B	same as above
Breaker compatibility	LA, LH (Series 4 or later), Q4	B	same as above
Cross-links	Families: I-LINE, NF · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Status		
Open question	*Catalog number constructed from the OEM LA1( ) + suffix rule; not printed verbatim - verify.*		

EDH-SQD-00952	LA11037	Square D	breaker-accessory	STATUS UNKNOWN

Square D field-installable shunt trip 277/480 Vac, LA/LH/Q4

OEM part number	LA11037	B	S183 p. 3-23, Table 3.61 Field-Installable Accessories (suffix codes from Table 3.60 p. 3-22); oem_spec
Description	shunt trip 277/480 Vac. Field-installable accessory catalog number = LA1 + suffix from Table 3.60 (OEM example: LA11212). Field-installable on LA/LH/Q4 Series 4 or newer (not LA/LH top-feed MT); both accessory ports accept shunt trips, UVRs and aux switches; alarm switch factory only.	B	same as above
Application	accessory	B	same as above
Breaker compatibility	LA, LH (Series 4 or later), Q4	B	same as above
Cross-links	Families: I-LINE, NF · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Status		
Open question	*Catalog number constructed from the OEM LA1( ) + suffix rule; not printed verbatim - verify.*		

EDH-SQD-00951	LA11042	Square D	breaker-accessory	STATUS UNKNOWN

Square D field-installable shunt trip 24 Vac, LA/LH/Q4

OEM part number	LA11042	B	S183 p. 3-23, Table 3.61 Field-Installable Accessories (suffix codes from Table 3.60 p. 3-22); oem_spec
Description	shunt trip 24 Vac. Field-installable accessory catalog number = LA1 + suffix from Table 3.60 (OEM example: LA11212). Field-installable on LA/LH/Q4 Series 4 or newer (not LA/LH top-feed MT); both accessory ports accept shunt trips, UVRs and aux switches; alarm switch factory only.	B	same as above
Application	accessory	B	same as above
Breaker compatibility	LA, LH (Series 4 or later), Q4	B	same as above
Cross-links	Families: I-LINE, NF · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Status		
Open question	*Catalog number constructed from the OEM LA1( ) + suffix rule; not printed verbatim - verify.*		

EDH-SQD-00956	LA11121	Square D	breaker-accessory	STATUS UNKNOWN

Square D field-installable undervoltage trip 120 Vac, LA/LH/Q4

OEM part number	LA11121	B	S183 p. 3-23, Table 3.61 Field-Installable Accessories (suffix codes from Table 3.60 p. 3-22); oem_spec
Description	undervoltage trip 120 Vac. Field-installable accessory catalog number = LA1 + suffix from Table 3.60 (OEM example: LA11212). Field-installable on LA/LH/Q4 Series 4 or newer (not LA/LH top-feed MT); both accessory ports accept shunt trips, UVRs and aux switches; alarm switch factory only.	B	same as above
Application	accessory	B	same as above
Breaker compatibility	LA, LH (Series 4 or later), Q4	B	same as above
Cross-links	Families: I-LINE, NF · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Status		
Open question	*Catalog number constructed from the OEM LA1( ) + suffix rule; not printed verbatim - verify.*		

EDH-SQD-00957	LA11124	Square D	breaker-accessory	STATUS UNKNOWN

Square D field-installable undervoltage trip 240 Vac, LA/LH/Q4

OEM part number	LA11124	B	S183 p. 3-23, Table 3.61 Field-Installable Accessories (suffix codes from Table 3.60 p. 3-22); oem_spec
Description	undervoltage trip 240 Vac. Field-installable accessory catalog number = LA1 + suffix from Table 3.60 (OEM example: LA11212). Field-installable on LA/LH/Q4 Series 4 or newer (not LA/LH top-feed MT); both accessory ports accept shunt trips, UVRs and aux switches; alarm switch factory only.	B	same as above
Application	accessory	B	same as above
Breaker compatibility	LA, LH (Series 4 or later), Q4	B	same as above
Cross-links	Families: I-LINE, NF · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Status		
Open question	*Catalog number constructed from the OEM LA1( ) + suffix rule; not printed verbatim - verify.*		

EDH-SQD-00948	LA11212	Square D	breaker-accessory	STATUS UNKNOWN

Square D field-installable auxiliary switch 1A/1B, LA/LH/Q4

OEM part number	LA11212	A	S183 p. 3-23, Table 3.61 Field-Installable Accessories (suffix codes from Table 3.60 p. 3-22); oem_spec
Description	auxiliary switch 1A/1B. Field-installable accessory catalog number = LA1 + suffix from Table 3.60 (OEM example: LA11212). Field-installable on LA/LH/Q4 Series 4 or newer (not LA/LH top-feed MT); both accessory ports accept shunt trips, UVRs and aux switches; alarm switch factory only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH (Series 4 or later), Q4	A	same as above
Cross-links	Families: I-LINE, NF · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Status		

EDH-SQD-00949	LA11352	Square D	breaker-accessory	STATUS UNKNOWN

Square D field-installable auxiliary switch 2A/2B, LA/LH/Q4

OEM part number	LA11352	B	S183 p. 3-23, Table 3.61 Field-Installable Accessories (suffix codes from Table 3.60 p. 3-22); oem_spec
Description	auxiliary switch 2A/2B. Field-installable accessory catalog number = LA1 + suffix from Table 3.60 (OEM example: LA11212). Field-installable on LA/LH/Q4 Series 4 or newer (not LA/LH top-feed MT); both accessory ports accept shunt trips, UVRs and aux switches; alarm switch factory only.	B	same as above
Application	accessory	B	same as above
Breaker compatibility	LA, LH (Series 4 or later), Q4	B	same as above
Cross-links	Families: I-LINE, NF · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Status		
Open question	*Catalog number constructed from the OEM LA1( ) + suffix rule; not printed verbatim - verify.*		

EDH-SQD-00958	LA1G	Square D	breaker-accessory	STATUS UNKNOWN

Square D field-installable ground-fault shunt trip (obsolete GP Ground-Censor / add-on GF module use), LA/LH/Q4

OEM part number	LA1G	A	S183 p. 3-23, Table 3.61 Field-Installable Accessories (suffix codes from Table 3.60 p. 3-22); oem_spec
Description	ground-fault shunt trip (obsolete GP Ground-Censor / add-on GF module use). Field-installable accessory catalog number = LA1 + suffix from Table 3.60 (OEM example: LA11212). Field-installable on LA/LH/Q4 Series 4 or newer (not LA/LH top-feed MT); both accessory ports accept shunt trips, UVRs and aux switches; alarm switch factory only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH (Series 4 or later), Q4	A	same as above
Cross-links	Families: I-LINE, NF · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Status		

Terminal Shield

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00589	**ILMLC2W**	I-Line M-frame two-barrel main line lug cover (US service entrance)	PowerPacT M-frame vertical main circuit breaker with AL800P6K (2) 3/0- A	for panelboards manufactured after January 1, 2017
EDH-SQD-00588	**ILMLC3W**	I-Line M-frame three-barrel main line lug cover (US service entrance)	PowerPacT M-frame vertical main circuit breaker with AL800M23K or CU80 A	for panelboards manufactured after January 1, 2017

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00587	**ILMLC4W**	I-Line M-frame four-barrel main line lug cover (US service entrance)	PowerPacT M-frame vertical main circuit breaker with AL1200P24K or CU1 **A**	for panelboards manufactured after January 1, 2017

EDH-SQD-00589	ILMLC2W	Square D	terminal-shield	FOR PANELBOARDS MANUFA

I-Line M-frame two-barrel main line lug cover (US service entrance)

OEM part number	ILMLC2W	**A**	S72 80043-839-01 Table 1, p.3; p.14; oem_spec
Alternate / superseded numbers	ILMLC2W1 (Table prints 'ILMLC2W1' - the trailing 1 is footnote 1, not part of the number)	**C**	S72 alias; Table 1; oem_spec
Description	M-frame Two-barrel Lug Cover; main circuit breaker line lug cover kit for U.S. service entrance devices (NEC 2017 line-side barrier)	**A**	S72 oem_spec
Application	main (vertical, line side)	**A**	same as above
Breaker compatibility	PowerPacT M-frame vertical main circuit breaker with AL800P6K (2) 3/0-600 kcmil or AL800P7K (2) 3/0-600 kcmil Cu/Al, (2) 3/0-750 kcmil Al lug kit installed; not for back-fed mains	**A**	S72 p.14; oem_spec
OEM instruction document	80043-839-01: if three cables/phase (ILMLC3W) or 3-4 cables (ILMLC4W) remove knockouts in vertical shield barriers with wire cutters and deburr	**A**	S72 p.15; oem_spec
Status	for panelboards manufactured after January 1, 2017	**A**	S72 Table 1 note 2; oem_spec
Cross-links	Families: I-LINE · Breakers: M-frame MG/MJ (I-Line)		
Not yet documented	Dimensions, Material		

EDH-SQD-00588	ILMLC3W	Square D	terminal-shield	FOR PANELBOARDS MANUFA

I-Line M-frame three-barrel main line lug cover (US service entrance)

OEM part number	ILMLC3W	**A**	S72 80043-839-01 Table 1, p.3; p.14; oem_spec
Alternate / superseded numbers	ILMLC3W1 (Table prints 'ILMLC3W1' - the trailing 1 is footnote 1, not part of the number)	**C**	S72 alias; Table 1; oem_spec
Description	M-frame Three-barrel Lug Cover; main circuit breaker line lug cover kit for U.S. service entrance devices (NEC 2017 line-side barrier)	**A**	S72 oem_spec
Application	main (vertical, line side)	**A**	same as above
Breaker compatibility	PowerPacT M-frame vertical main circuit breaker with AL800M23K or CU800M23K (3) 3/0-500 kcmil lug kit installed; not for back-fed mains	**A**	S72 p.14; oem_spec
OEM instruction document	80043-839-01: if three cables/phase (ILMLC3W) or 3-4 cables (ILMLC4W) remove knockouts in vertical shield barriers with wire cutters and deburr	**A**	S72 p.15; oem_spec
Status	for panelboards manufactured after January 1, 2017	**A**	S72 Table 1 note 2; oem_spec
Cross-links	Families: I-LINE · Breakers: M-frame MG/MJ (I-Line)		
Not yet documented	Dimensions, Material		
Open question	*80043-839-01 step 3 text says 'ILMC3W' - typo for ILMLC3W?*		

EDH-SQD-00587	ILMLC4W	Square D	terminal-shield	FOR PANELBOARDS MANUFA

I-Line M-frame four-barrel main line lug cover (US service entrance)

OEM part number	ILMLC4W	A	S72 80043-839-01 Table 1, p.3; p.14; oem_spec
Alternate / superseded numbers	ILMLC4W1 (Table prints 'ILMLC4W1' - the trailing 1 is footnote 1, not part of the number)	C	S72 alias; Table 1; oem_spec
Description	M-frame Four-barrel Lug Cover; main circuit breaker line lug cover kit for U.S. service entrance devices (NEC 2017 line-side barrier)	A	S72 oem_spec
Application	main (vertical, line side)	A	same as above
Breaker compatibility	PowerPacT M-frame vertical main circuit breaker with AL1200P24K or CU1200P24K (4) 3/0-500 kcmil lug kit installed; not for back-fed mains	A	S72 p.14; oem_spec
OEM instruction document	80043-839-01: if three cables/phase (ILMLC3W) or 3-4 cables (ILMLC4W) remove knockouts in vertical shield barriers with wire cutters and deburr	A	S72 p.15; oem_spec
Status	for panelboards manufactured after January 1, 2017	A	S72 Table 1 note 2; oem_spec
Cross-links	Families: I-LINE · Breakers: M-frame MG/MJ (I-Line)		
Not yet documented	Dimensions, Material		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00947	**LA1CL**	Square D cylinder lock, field-installable, LA/LH/Q4	LA, LAL, LH, LHL, Q4 A	unknown

EDH-SQD-00947	LA1CL	Square D	handle-lock	STATUS UNKNOWN

Square D cylinder lock, field-installable, LA/LH/Q4

OEM part number	LA1CL	A	S183 p. 3-25, Table 3.68 Cylinder Lock; oem_spec
Description	Cylinder lock used to lock the circuit breaker in the OFF position; breaker cannot be reset when locked OFF. Field-installable only for LA, LAL, LH, LHL, Q4 (FA/FH use factory -CL suffix).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LAL, LH, LHL, Q4	A	same as above
Cross-links	Families: I-LINE · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Material, Status		

4.3 MLN — Square D MLN panelboards and switchboards (ML breakers)

FAM-SQD-013 · panelboard · aka ML, ML-1, ML1, MLN, MLW · markings: Square D

Short-lived Square D panelboard and switchboard line (1962-1968) using ML breakers, superseded by I-Line. Adapter kits once allowed FAL/KAL/LAL/MAL breakers; these are now obsolete. Dealers sell 'ML1 PNL' twin and single mounting hardware for KAP, LAP, LA, MAP, FAP/FAL and 997-frame breakers.

1970 Digest ordering example: '1 - MAL26600, 600 A., 2 P., circuit breaker for use in 600V., 3 Ph., 3 W. panelboard catalog number MLW-5678-6 With mounting assembly for A-B phase connection' - shows an ML-family 'MLW' panel still being serviced in 1970 with MAL breakers and mounting assemblies.

Attribute	Value	Cl.	Sources
Status	Obsolete; Schneider recommends replacing the complete panelboard (new I-Line); FAL/KAL/LAL/MAL adapter kits SK4515/SK4516/SK4517/SK4578 offered as of 1/1/2015 but now obsolete; PowerPact has no adapter kits	A	S456 oem_web
Era of manufacture	Sold in the USA from 1962 to 1968	A	same as above
Successor	I-Line panelboard (complete replacement)	A	same as above
Branch breakers accepted	ML breakers (side label part number 999xxx per forum); later FAL, KAL, LAL, MAL via adapter kits; dealer 'ML1' kits for FAP/FAL, KAP, LA, LAP, MAP and 997 frame	B	S456, S460, S444 oem_web
Identification features	ML breakers carry a side label with a part number like 999xxx	C	S460 forum
Mlw	Panel catalog prefix MLW used with MAL breakers + mounting assembly (1970 replacement example)	A	S463 Digest 152 (1970) p.85; oem_spec

Breaker families associated: Square D ML breakers (MLN panels)
Key documents: S444 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it; S456 Schneider Electric FAQ FA130530 - MLN panelboards and replacement circuit breakers (MLN pa; S460 Mike Holt forum - 'Square D - Legacy Breaker Information' (ML line superseded by I-Line in; S463 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00539	**ML1997**	ML-1 panel unknown mounting hardware for 997 frame breaker	997 frame C	Traded by dealer; OEM origin unknown
EDH-SQD-00538	**ML1FAS**	ML-1 panel single mounting hardware for FAP/FAL breaker	FAP/FAL C	Traded by dealer; OEM origin unknown
EDH-SQD-00533	**ML1KAPT**	ML-1 panel twin mounting hardware for KAP breaker	KAP C	Traded by dealer; OEM origin unknown
EDH-SQD-00535	**ML1LAPS**	ML-1 panel single mounting hardware for LAP breaker	LAP C	Traded by dealer; OEM origin unknown
EDH-SQD-00534	**ML1LAPT**	ML-1 panel twin mounting hardware for LAP breaker	LAP C	Traded by dealer; OEM origin unknown
EDH-SQD-00536	**ML1LAT**	ML-1 panel twin mounting hardware for LA breaker	LA C	Traded by dealer; OEM origin unknown
EDH-SQD-00537	**ML1MAPS**	ML-1 panel single mounting hardware for MAP breaker	MAP C	Traded by dealer; OEM origin unknown
EDH-SQD-00540	**ML-LAL-S**	ML-1 panel single? mounting hardware for LAP (title says single, spec says twin) breaker	LAP (title says single, spec says twin) C	Traded by dealer; OEM origin unknown

EDH-SQD-00539 — ML1997 — Square D — breaker-mounting-kit — TRADED BY DEALER; OEM

ML-1 panel unknown mounting hardware for 997 frame breaker

OEM part number	ML1997	C	S444 surplus_listing
Description	ML1 PNL - unknown mounting hardware for 997 frame breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	997 frame	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S444 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00538 — ML1FAS — Square D — breaker-mounting-kit — TRADED BY DEALER; OEM

ML-1 panel single mounting hardware for FAP/FAL breaker

OEM part number	ML1FAS	C	S444 surplus_listing
Description	ML1 PNL - single mounting hardware for FAP/FAL breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	FAP/FAL	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S444 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00533 — ML1KAPT — Square D — breaker-mounting-kit — TRADED BY DEALER; OEM

ML-1 panel twin mounting hardware for KAP breaker

OEM part number	ML1KAPT	C	S444 surplus_listing
Description	ML1 PNL - twin mounting hardware for KAP breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	KAP	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S444 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00535	ML1LAPS	Square D	breaker-mounting-kit	TRADED BY DEALER; OEM

ML-1 panel single mounting hardware for LAP breaker

OEM part number	ML1LAPS	C	S444 surplus_listing
Description	ML1 PNL - single mounting hardware for LAP breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	LAP	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S444 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00534	ML1LAPT	Square D	breaker-mounting-kit	TRADED BY DEALER; OEM

ML-1 panel twin mounting hardware for LAP breaker

OEM part number	ML1LAPT	C	S444 surplus_listing
Description	ML1 PNL - twin mounting hardware for LAP breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	LAP	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S444 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00536	ML1LAT	Square D	breaker-mounting-kit	TRADED BY DEALER; OEM

ML-1 panel twin mounting hardware for LA breaker

OEM part number	ML1LAT	C	S444 surplus_listing
Description	ML1 PNL - twin mounting hardware for LA breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	LA	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S444 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00537	ML1MAPS	Square D	breaker-mounting-kit	TRADED BY DEALER; OEM

ML-1 panel single mounting hardware for MAP breaker

OEM part number	ML1MAPS	C	S444 surplus_listing
Description	ML1 PNL - single mounting hardware for MAP breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	MAP	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S444 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00540	ML-LAL-S	Square D	breaker-mounting-kit	TRADED BY DEALER; OEM

ML-1 panel single? mounting hardware for LAP (title says single, spec says twin) breaker

OEM part number	ML-LAL-S	C	S444 surplus_listing
Description	ML1 PNL - single? mounting hardware for LAP (title says single, spec says twin) breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	LAP (title says single, spec says twin)	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S444 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00068	**BSK4515**	Aftermarket bus connection kit BSK4515 (seller cross-ref to SQD SK4515)	mounts two FAL/FHL breakers up to 100 A C	current aftermarket item; listing label 'Aftermarket'
EDH-OTH-00069	**BSK4516**	Aftermarket bus connection kit BSK4516 (seller cross-ref to SQD SK4516)	mounts two KAL/KHL breakers up to 225 A C	current aftermarket item; listing label 'Aftermarket'
EDH-OTH-00070	**BSK4517**	Aftermarket bus connection kit BSK4517 (seller cross-ref to SQD SK4517)	mounts one LAL/LHL breaker up to 400 A C	current aftermarket item; listing label 'Aftermarket'
EDH-OTH-00071	**BSK4578**	Aftermarket bus connection kit BSK4578 (seller cross-ref to SQD SK4578)	mounts one MAL/MHL breaker up to 800 A C	current aftermarket item; listing label 'Aftermarket'
EDH-SQD-00529	**SK4515**	Square D adapter kit for FAL breaker in obsolete MLN panelboard	FAL A	Offered as of 1/1/2015; now obsolete and no longer available
EDH-SQD-00530	**SK4516**	Square D adapter kit for KAL breaker in obsolete MLN panelboard	KAL A	Offered as of 1/1/2015; now obsolete and no longer available
EDH-SQD-00531	**SK4517**	Square D adapter kit for LAL breaker in obsolete MLN panelboard	LAL A	Offered as of 1/1/2015; now obsolete and no longer available
EDH-SQD-00532	**SK4578**	Square D adapter kit for MAL breaker in obsolete MLN panelboard	MAL A	Offered as of 1/1/2015; now obsolete and no longer available

EDH-OTH-00068	BSK4515	Breaker King (aftermarket/PCS-brand kit per seller)	conversion-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BSK4515 (seller cross-ref to SQD SK4515)

OEM part number	BSK4515 (Breaker King catalog/model number)	C	S629 distributor
Alternate / superseded numbers	SK4515 [equivalent] (seller cross-reference: 'Equal To - OEM # SK4515')	C	same as above
Description	Bus hardware for obsolete Square D ML panelboards; mounts two FAL/FHL breakers up to 100 A (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two FAL/FHL breakers up to 100 A (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'Aftermarket' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM SK4515 ('Equal To - OEM # SK4515') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: MLN		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00069	BSK4516	Breaker King (aftermarket/PCS-brand kit per seller)	conversion-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BSK4516 (seller cross-ref to SQD SK4516)

OEM part number	BSK4516 (Breaker King catalog/model number)	C	S629 distributor
Alternate / superseded numbers	SK4516 [equivalent] (seller cross-reference: 'Equal To - OEM # SK4516')	C	same as above
Description	Bus hardware for obsolete Square D ML panelboards; mounts two KAL/KHL breakers up to 225 A (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two KAL/KHL breakers up to 225 A (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'Aftermarket' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM SK4516 ('Equal To - OEM # SK4516') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: MLN		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00070	BSK4517	Breaker King (aftermarket/PCS-brand kit per seller)	conversion-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BSK4517 (seller cross-ref to SQD SK4517)

OEM part number	BSK4517 (Breaker King catalog/model number)	C	S629 distributor
Alternate / superseded numbers	SK4517 [equivalent] (seller cross-reference: 'Equal To - OEM # SK4517')	C	same as above
Description	Bus hardware for obsolete Square D ML panelboards; mounts one LAL/LHL breaker up to 400 A (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one LAL/LHL breaker up to 400 A (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'Aftermarket' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM SK4517 ('Equal To - OEM # SK4517') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: MLN		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00071	BSK4578	Breaker King (aftermarket/PCS-brand kit per seller)	conversion-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BSK4578 (seller cross-ref to SQD SK4578)

OEM part number	BSK4578 (Breaker King catalog/model number)	C	S629 distributor
Alternate / superseded numbers	SK4578 [equivalent] (seller cross-reference: 'Equal To - OEM # SK4578')	C	same as above
Description	Bus hardware for obsolete Square D ML panelboards; mounts one MAL/MHL breaker up to 800 A (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one MAL/MHL breaker up to 800 A (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'Aftermarket' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM SK4578 ('Equal To - OEM # SK4578') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: MLN		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-SQD-00529	SK4515	Square D	conversion-kit	OFFERED AS OF 1/1/2015

Square D adapter kit for FAL breaker in obsolete MLN panelboard

OEM part number	SK4515	A	S456 oem_web
Description	Adapter kit pairing: FAL with SK4515 (MLN panels)	A	same as above
Breaker compatibility	FAL	A	same as above
Status	Offered as of 1/1/2015; now obsolete and no longer available (FAQ revision note)	A	same as above
Replacement / successor	Replace complete panelboard with new I-Line	A	same as above
Aftermarket / reproduction	Breaker King offers BSK4515 as a replacement ('Equal To - OEM # SK4515'), labelled 'Aftermarket' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S629 distributor
Cross-links	Families: MLN · Breakers: Square D ML breakers (MLN panels)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-SQD-00530	SK4516	Square D	conversion-kit	OFFERED AS OF 1/1/2015

Square D adapter kit for KAL breaker in obsolete MLN panelboard

OEM part number	SK4516	A	S456 oem_web
Description	Adapter kit pairing: KAL with SK4516 (MLN panels)	A	same as above
Breaker compatibility	KAL	A	same as above
Status	Offered as of 1/1/2015; now obsolete and no longer available (FAQ revision note)	A	same as above
Replacement / successor	Replace complete panelboard with new I-Line	A	same as above
Aftermarket / reproduction	Breaker King offers BSK4516 as a replacement ('Equal To - OEM # SK4516'), labelled 'Aftermarket' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S629 distributor
Cross-links	Families: MLN · Breakers: Square D ML breakers (MLN panels)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-SQD-00531	SK4517	Square D	conversion-kit	OFFERED AS OF 1/1/2015

Square D adapter kit for LAL breaker in obsolete MLN panelboard

OEM part number	SK4517	A	S456 oem_web
Description	Adapter kit pairing: LAL with SK4517 (MLN panels)	A	same as above
Breaker compatibility	LAL	A	same as above
Status	Offered as of 1/1/2015; now obsolete and no longer available (FAQ revision note)	A	same as above
Replacement / successor	Replace complete panelboard with new I-Line	A	same as above
Aftermarket / reproduction	Breaker King offers BSK4517 as a replacement ('Equal To - OEM # SK4517'), labelled 'Aftermarket' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S629 distributor
Cross-links	Families: MLN · Breakers: Square D ML breakers (MLN panels)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-SQD-00532	SK4578	Square D	conversion-kit	OFFERED AS OF 1/1/2015

Square D adapter kit for MAL breaker in obsolete MLN panelboard

OEM part number	SK4578	A	S456 oem_web
Description	Adapter kit pairing: MAL with SK4578 (MLN panels)	A	same as above
Breaker compatibility	MAL	A	same as above
Status	Offered as of 1/1/2015; now obsolete and no longer available (FAQ revision note)	A	same as above
Replacement / successor	Replace complete panelboard with new I-Line	A	same as above
Aftermarket / reproduction	Breaker King offers BSK4578 as a replacement ('Equal To - OEM # SK4578'), labelled 'Aftermarket' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S629 distributor
Cross-links	Families: MLN · Breakers: Square D ML breakers (MLN panels)		
Not yet documented	Dimensions, Kit contents, Material		

4.4 NA1B — Square D NA1B panelboard (E-frame bolted, AC/DC)

FAM-SQD-012 · panelboard · aka A1B, NA-1B, NA1B-LX, NAIB · markings: Square D

Square D 250 V AC/DC bolted E-frame lighting panelboard of 1960. Schneider guidance (search summary) replaces it with NQ (AC or <=48 V DC) or I-Line (DC up to 250 V).

1970 Digest: NA1B uses distributed phase bussing, galvanized 20 in wide boxes, MONO-FLAT front with concealed trim clamps; top/bottom gutters 5 in min (225 A) and 8 in min (400/600 A). Meets Fed Spec W-P-115a Type I Class 1, UL listed.

Attribute	Value	Cl.	Sources
Era of manufacture	Advertised by Square D in September 1960	A	S438 oem_spec
Successor	NQ panelboard for 240 V AC or DC up to 48 V DC; I-Line for DC up to 250 V (search summary of Schneider FAQ)	C	S459 oem_web
Voltage rating	AC or DC (E frame bolted connection)	A	S438 oem_spec
	240 V max AC; 125 V or 125/250 V DC; 1-ph 2W/3W, 3-ph 3W/4W	A	S463 Digest 152 (1970) p.66; oem_spec
Main ampacity	Main lugs 225 A (300 MCM), 400 A and 600 A (2-500 MCM); main breaker 225 A KA, 400 A LA; NA1B-LX 225 A lugs / 100 A MB	A	S463 Digest 152 (1970) p.55, 66; oem_spec
Branch breakers accepted	Square D E-frame bolted breakers	A	S438 oem_spec
	Bolt-on A1B E frame, 10,000 A IC AC / 5,000 A IC DC; 15-100 A 1/2/3-pole (LX 15-50 A)	A	S463 Digest 152 (1970) p.66; oem_spec
Bus	Distributed phase bussing	A	same as above
Dimensions	Box 20 in W x 5-3/4 in D; gutters top/bottom 5 in min (225 A), 8 in min (400/600 A) (OCR)	B	S463 Digest 152 (1970) p.55, 66; oem_spec

Key documents: S438 sim_ecm_1960-09_59_9 Electrical Construction and Maintenance, Vol 59 No 9, September 1960 - Square D advertisem; S459 Schneider Electric FAQ group on NQO/NQOB, NEHB, NA1B, NY1B (FA97632, FA124608, FA232958, F; S463 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P
Also fits this family (entry printed elsewhere): PK27GTA, PK23GTA, SK-5666, HLO-1, QO-1CP, PK-3SP, PK-49SP, PK-9GTA, PK-4FL

4.5 NEHB — NEHB panelboard

FAM-SQD-005 · panelboard · aka NEHB, NEHB lighting panelboard, NY1B, NYIB · markings: Schneider Electric, Square D, Square D Canada

Square D 480Y/277 V lighting panelboard using EH plug-on / EHB bolt-on breakers, manufactured 1983-1995 and replaced by NF. EH/EHB breakers reported no longer available. No NEHB kit part numbers were found in this batch.

Square D's pre-NF 480Y/277 V bolt-on lighting panelboards. NY1B: Schneider FAQ FA233845 says 1-pole Y1B breakers are obsolete; 2/3-pole FAL breakers can be replaced if hardware remains; new FAL cannot be added where ML-1/2/3-pole breakers were used (no connectors). NEHB used EH/EHB breakers and was obsoleted in 1995 in favour of NF.

Attribute	Value	Cl.	Sources
Status	obsolete (1995)	A	S87 oem_spec
	NEHB obsoleted 1995; EH/EHB breakers discontinued with no replacement; NY1B 1-pole Y1B breakers obsolete; NY1B mounting kit SK4529 discontinued (search summaries)	C	S459 oem_web
Era of manufacture	1983-1995	A	S87 oem_spec
Successor	NF (uses EDB/EGB/EJB) (Seen only as search snippet of OEM FAQ FA166748 (page blocked))	C	S91 oem_spec
	NF panelboard with EDB/EGB/EJB breakers (EDB cannot be used in NEHB)	C	S459 oem_web
Voltage rating	NY1B (Canada 1985): 240/416 V, 277/480 V, 346/600 V AC with bolt-on breakers, 70 and 100 A types listed	C	S439 distributor
Branch breakers accepted	EH (plug-on), EHB (bolt-on)	A	S87 oem_spec
	NEHB: EH/EHB; built-in rejection prevents 20/30 A EH/EHB opposite 70-100 A EHB; NY1B: Y1B 1-pole 15-50 A and 2/3-pole FAL 15-100 A, some with ML-1 breakers	C	S459, S457 oem_web
Ny1b fal	If NY1B supplied with 2 & 3-pole FAL 15-100 A breakers and hardware exists they can be replaced; no new connectors for positions that used ML-1/2/3-pole breakers	A	S457 oem_web

Breaker families associated: EH / EHB, Square D EH / EHB (NEHB), Square D ML breakers (MLN panels), Square D Y1B 1-pole (NY1B)
Key documents: S87 FA332061 Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO /; S91 FA166748 Schneider Electric FAQ FA166748 (NEHB obsolescence / NF replacement); S439 bwb_P9-BJG-737 Electrozad (Electrozad Supply Co. catalogue / price book, Copel Inc. 1985) - ITE-Siemens, ; S444 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it; S457 Schneider Electric FAQ FA233845 - Are NY1B panelboard replacement breakers still available; S459 Schneider Electric FAQ group on NQO/NQOB, NEHB, NA1B, NY1B (FA97632, FA124608, FA232958, F; S609 Digest Section 13 (2009); distributor file name Square_D_QM3890B_Catalog.pdf Square D Digest (2009) Section 13 - Obsolescent Panelboards (QMB RTI, QMB replacement unit
Also fits this family (entry printed elsewhere): SF-225LP, HLO-1, PK5FL, PK22FL

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00528	**SK4529**	Square D NY1B mounting kit (discontinued)	—	Discontinued

EDH-SQD-00528 **SK4529** Square D breaker-mounting-kit **DISCONTINUED**

Square D NY1B mounting kit (discontinued)

OEM part number	SK4529	C	S459 oem_web
Description	Required mounting kit SK4529 is discontinued and the entire panel will have to be replaced (NY1B) (Search-engine summary)	C	same as above
Status	Discontinued	C	same as above
Cross-links	Families: NEHB		
Not yet documented	Dimensions, Kit contents, Material		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00144	**BNEHBSD**	Bus link replacements for Square D NEHB (3-pole, EH/EHB breakers)	—	unknown

EDH-OTH-00144 **BNEHBSD** Breaker King connector-strap **STATUS UNKNOWN**

Bus link replacements for Square D NEHB (3-pole, EH/EHB breakers)

OEM part number	BNEHBSD	C	S629 distributor
Description	3-pole replacement bus link kit for Square D EH/EHB breakers in obsolete NEHB panelboards (listing truncated)	C	same as above
Replacement / successor	No OEM cross-reference given. Note: Schneider FAQ FA129258 states bus bars in an obsolete NEHB panelboard are not field replaceable items (applies to bus bars, not necessarily breaker links). (seller claim + OEM FAQ via search extract)	C	S629, S636 distributor
Cross-links	Families: NEHB		
Not yet documented	Dimensions, Listing / approvals, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00527	**FP1**	Square D EHB filler plate, 1 in (NEHB)	EHB positions C	unknown

EDH-SQD-00527 **FP1** Square D filler-plate **STATUS UNKNOWN**

Square D EHB filler plate, 1 in (NEHB)

OEM part number	FP1	C	S444 surplus_listing
Description	EHB filler plates 1 in (also sold in packs FP1-6, FP1-12)	C	same as above
Breaker compatibility	EHB positions	C	same as above
Cross-links	Families: NEHB · Breakers: Square D EH / EHB (NEHB)		
Not yet documented	Dimensions, Kit contents, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00606	**PK3TC**	Trim clamps and screws, NEHB fronts up through 400 A	—	unknown

EDH-SQD-00606 **PK3TC** Square D hardware-kit **STATUS UNKNOWN**

Trim clamps and screws, NEHB fronts up through 400 A

OEM part number	PK3TC	A	S609 13-7 Table 13.1; oem_spec
Description	Trim clamps and screws; application NEHB panelboards, all fronts up through 400 A	A	S609 oem_spec
Cross-links	Families: NEHB		
Not yet documented	Dimensions, quantity		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00607	**8004332501**	Circuit I.D. numbers 1 through 54, NEHB and NEHB column width	—	unknown

EDH-SQD-00607 **8004332501** Square D other **STATUS UNKNOWN**

Circuit I.D. numbers 1 through 54, NEHB and NEHB column width

OEM part number	8004332501	**A**	S609 13-7 Table 13.2; oem_spec
Description	Circuit I.D. numbers 1 through 54 for NEHB and NEHB column width panelboards	**A**	S609 oem_spec
Cross-links	Families: NEHB		

4.6 NF — NF panelboard (Class 1670)

FAM-SQD-004 · panelboard · aka NF Series 0, NF Series E1, NFOM · markings: Schneider Electric, Square D

Square D 480Y/277 Vac (600Y/347 Vac max) lighting panelboard using E-frame bolt-on branch breakers (EDB/EGB/EJB, 15-125 A). Series 0 introduced 1995 replacing NEHB; Series E1 from October 2008. Merchandised RTI interiors with field kits: main breaker adapter kits (N150MH, N250MJ, N400M, N600MPPL), sub-feed/feed-through lugs, neutral kits, branch connector kits SKNF250/SKNF600. Maximum branch breaker pair combination 170 A.

Attribute	Value	Cl.	Sources
Status	current	**A**	S27 p. 9-29 ff.; oem_spec
Era of manufacture	Series 0: 1995-Oct 2008; Series E1: Oct 2008-present	**A**	S87 oem_spec
Voltage rating	600Y/347 Vac max (480Y/277 Vac with EDB/EGB/EJB US breakers)	**A**	S27 p. 9-31, 9-32; oem_spec
Main ampacity	125, 250, 400, 600 A merchandised; 800 A factory assembled	**A**	S27 p. 9-31; oem_spec
Branch breakers accepted	EDB, EGB, EJB (E-frame bolt-on); EDB/EGB/EJB EPD	**A**	S27 p. 9-32; oem_spec

Breaker families associated: EDB / EGB / EJB (E-frame bolt-on), FI frame (legacy), KI / KC frame (legacy), LA / LH (L-frame, legacy thermal-magnetic), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR), PowerPacT L-frame (LG/LJ/LL/LR), PowerPacT M / P / R frame (I-Line)
Key documents: S27 0100CT2401-SEC-09 Panelboards: Digest Section 9 (Square D Digest, Section 9 Panelboards); S28 Digest 0100CT2401 (online) Schneider Electric Digest Plus - Section 9: Panelboards (online HTML pages: NQ Panelboard ; S48 80043-741-03 NF/NFOM Panelboards Class 1670 Instruction Bulletin, Rev. 06; S87 FA332061 Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO /
Also fits this family (entry printed elsewhere): QO70AN, S37444, S37445, PK27GTA, PK27GTACU, PK23GTAL, PKGTAB, PK12GTA, TBPANEL, MHBE20, MHKE20, MHCO20, MHBE26, MH62D9, MH68D9, MH74D9, MH80D9, MH86D9, MH92D9, LP9503, MHCOEW20A, MHCOEW20F, LP9618, MH26, MH32, MH38, MH44, MH50, MH56, MH62, MH68, MH74, MH80, MH86, MH92, MH26WP, MH32WP, MH38WP, MH44WP, MH50WP, MH56WP, MH62WP, MH68WP, MH74WP, MH80WP, MH86WP, MH62D9VWP, MH68D9VWP, MH74D9VWP, MH80D9VWP, MH86D9VWP, MH92D9VWP, NC26, NC32, NC38, NC44, NC50, NC50V, NC56V, NC62V, NC68V, NC74V, NC80V, NC86V, MPX81542, LA11212, LA11352, LA11021, LA11042, LA11037, LA11027, LA11028, LA11029, LA11121, LA11124, LA1G, S29371, S37422, S29370, HJPA

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00067	**N100MFI**	NF FI-frame main circuit breaker adapter kit (legacy)	—	not in 2026 Digest; presumed discontinued
EDH-SQD-00063	**N150MH**	NF main circuit breaker adapter kit, H-frame, 150 A	HD, HG, HJ, HL, HR **A**	current (listed in 2026 Digest)
EDH-SQD-00064	**N250MJ**	NF main circuit breaker adapter kit, J-frame, 250 A	JD, JG, JJ, JL, JR **A**	current (listed in 2026 Digest)
EDH-SQD-00068	**N250MKC**	NF KI-frame main circuit breaker adapter kit (legacy)	—	not in 2026 Digest; presumed discontinued
EDH-SQD-00065	**N400M**	NF main circuit breaker adapter kit, LA/LH, 400 A	LA/LH short-handle (e.g. LAL36400MB); also LI, LC per distributor **B**	current (listed in 2026 Digest)
EDH-SQD-00066	**N600MPPL**	NF main (400/600 A) or sub-feed (400 A) breaker kit, PowerPacT L	LG, LJ, LL, LR; requires MH..D9 8.75 in. deep boxes and 3-point latch **A**	current (listed in 2026 Digest)
EDH-SQD-00081	**NF250SFBH**	NF sub-feed circuit breaker kit, H-frame, 250 A mains	HDL, HGL, HJL, HLL, HRL **A**	current (listed in 2026 Digest)
EDH-SQD-00082	**NF250SFBJ**	NF sub-feed circuit breaker kit, J-frame, 250 A mains	JDL, JGL, JJL, JLL, JRL **A**	current (listed in 2026 Digest)
EDH-SQD-00083	**NF600SFBH**	NF single/dual sub-feed circuit breaker kit, H-frame, 400 A mains	HDL, HGL, HJL, HLL, HRL; not field-installable in NF with PowerPacT L **A**	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00084	**NF600SFBJ**	NF single/dual sub-feed circuit breaker kit, J-frame, 400 A mains	JDL, JGL, JJL, JLL, JRL A	current (listed in 2026 Digest)
EDH-SQD-00085	**NF600SFBPPL**	NF sub-feed circuit breaker kit, PowerPacT L, 600 A	—	current (listed in 2026 Digest)

EDH-SQD-00067	N100MFI	Square D	main-breaker-kit	NOT IN 2026 DIGEST; PR

NF FI-frame main circuit breaker adapter kit (legacy)

OEM part number	N100MFI	A	S62 oem_spec
Description	NF panelboard FI-frame main circuit breaker adapter kit	A	same as above
Application	main	A	same as above
Kit contents	Deadfront cover, mounting pan, support brackets (2), 10-32x5/16 (10), 1/4-20x3/4, 10-32x7/16 (4), kit-specific main breaker connectors, rail extensions (2), rail splices (2), MAIN label	A	same as above
Torque values	Connector screws and hard-bus connector hardware 60-65 lb-in (6.8-7.3 N-m)	A	same as above
OEM instruction document	80043-765-02 (01/2009)	A	same as above
Status	not in 2026 Digest; presumed discontinued	C	S27 inference
Cross-links	Families: NF · Breakers: FI frame (legacy)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00063	N150MH	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF main circuit breaker adapter kit, H-frame, 150 A

OEM part number	N150MH	A	S27 oem_spec
Description	Vertical H-frame main breaker adapter kit for 125 A NF interiors (NF418L1..NF454L1C)	A	S27, S61 p. 9-31; oem_spec
Application	main	A	S27 oem_spec
Breaker compatibility	HD, HG, HJ, HL, HR	A	S27 p. 9-31; oem_spec
Current rating	15-125 A interiors (H-frame 150 A max)	A	S27, S61 p. 9-31; oem_spec
Kit contents	Three-terminal kit S37444, main breaker connectors (3), 10-32x5/16 (10), 1/4-20x3/4 (6), 10-32x7/16 (4), 8-32x3-1/4 (2), 10-32x7/8 (2), deadfront cover, mounting pan assembly, N150MH-only item M, MAIN label, support brackets (2), rail extensions (2), rail splices (2)	A	S61 Kit Contents; oem_spec
Torque values	Connector screws 60-65 lb-in (6.8-7.3 N-m)	A	S61 oem_spec
OEM instruction document	80043-764-03 Rev. 01 (09/2015)	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-31; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR)		
Requires	NFHJLLC (EDH-SQD-00070), S37444 (EDH-SQD-00121)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00064	N250MJ	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF main circuit breaker adapter kit, J-frame, 250 A

OEM part number	N250MJ	A	S27 oem_spec
Description	Vertical J-frame main breaker adapter kit for 250 A NF interiors	A	S27, S61 p. 9-31; oem_spec
Application	main	A	S27 oem_spec
Breaker compatibility	JD, JG, JJ, JL, JR	A	S27 p. 9-31; oem_spec
Current rating	125-250 A	A	same as above
Kit contents	Three-terminal kit S37445, main breaker connectors (3), screws, deadfront cover, mounting pan assembly, label, support brackets, rail extensions and splices	A	S61 oem_spec
Torque values	Connector screws 60-65 lb-in (6.8-7.3 N-m)	A	same as above
OEM instruction document	80043-764-03	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-31; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Requires	NFHJLLC (EDH-SQD-00070), S37445 (EDH-SQD-00122)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00068	N250MKC	Square D	main-breaker-kit	NOT IN 2026 DIGEST; PR

NF KI-frame main circuit breaker adapter kit (legacy)

OEM part number	N250MKC	A	S62 oem_spec
Description	NF panelboard KI-frame main circuit breaker adapter kit	A	same as above
Application	main	A	same as above
Kit contents	Deadfront cover, mounting pan, support brackets (2), 10-32x5/16 (10), 1/4-20x3/4, 10-32x7/16 (4), kit-specific main breaker connectors, rail extensions (2), rail splices (2), MAIN label	A	same as above
Torque values	Connector screws and hard-bus connector hardware 60-65 lb-in (6.8-7.3 N-m)	A	same as above
OEM instruction document	80043-765-02 (01/2009)	A	same as above
Status	not in 2026 Digest; presumed discontinued	C	S27 inference
Cross-links	Families: NF · Breakers: KI / KC frame (legacy)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00065	N400M	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF main circuit breaker adapter kit, LA/LH, 400 A

OEM part number	N400M	A	S27 oem_spec
Description	LA/LH main circuit breaker adapter kit for 400 A NF interiors	A	S27 p. 9-31; oem_spec
Application	main	A	S27 oem_spec
Breaker compatibility	LA/LH short-handle (e.g. LAL36400MB); also LI, LC per distributor (LI/LC from distributor listing only)	B	S27 p. 9-31; oem_spec
Current rating	125-400 A	A	same as above
Kit contents	Deadfront cover, mounting pan, support brackets (2), 10-32x7/8 (2), 1/4-20x1-1/8 (6), 10-32x7/16 (4), main breaker connectors/assembly (3), 10-32x5/16 (6), 3/8 washers (3), 3/8-16x3/4 (3), 12-24x3-1/4 (4), rail extensions (2), rail splices (2), MAIN label (Bulletin 80043-766-03 (NF L-frame main adapter kit) does not print the catalog number in extracted text; association with N400M by Digest description)	B	S63 oem_spec
Torque values	Breaker-to-connector 3/8-16 screws 250-275 lb-in (28.2-31.1 N-m); connector hardware 60-65 lb-in (6.8-7.3 N-m)	B	same as above
OEM instruction document	80043-766-03 (08/2009) (association inferred)	B	S63 inference
Status	current (listed in 2026 Digest)	A	S27 p. 9-31; oem_spec
Cross-links	Families: NF · Breakers: LA / LH (L-frame, legacy thermal-magnetic)		
Requires	NFLALLC (EDH-SQD-00071)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00066	N600MPPL	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF main (400/600 A) or sub-feed (400 A) breaker kit, PowerPacT L

OEM part number	N600MPPL	A	S27 oem_spec
Description	PowerPacT L main circuit breaker 400/600 A or sub-feed 400 A kit for NF	A	S80 oem_spec
Application	main or sub-feed	A	S27 p. 9-38; oem_spec
Breaker compatibility	LG, LJ, LL, LR; requires MH..D9 8.75 in. deep boxes and 3-point latch trims	A	S27 p. 9-31; oem_spec
Current rating	125-600 A main; 400 A max as SFB	A	S27 p. 9-31, 9-38; oem_spec
Kit contents	L-frame screw bag (seismic), deadfront support brackets, terminal shield bag, escutcheon, deadfront extension, breaker deadfront cover, mounting pan, A/B/C phase connector assemblies, phase insulator, deadfront insulator, NF deadfront cover + insulator, 18 in. rail extensions (2), rail extension splices (2)	A	S80 oem_spec
Torque values	M10x25 mm screws 442 lb-in (50 N-m); 1/4-20x1-1/8 screws 60-65 lb-in (6.8-7.3 N-m)	A	S80 steps 12-13; oem_spec
OEM instruction document	80043-866-01 (10/2021)	A	S80 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-31; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Requires	NFPPLLLC (EDH-SQD-00072)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00081	NF250SFBH	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF sub-feed circuit breaker kit, H-frame, 250 A mains

OEM part number	NF250SFBH	A	S27 oem_spec
Description	NF sub-feed circuit breaker kit, H-frame, 250 A mains	A	S27 p. 9-38; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	HDL, HGL, HJL, HLL, HRL	A	S27 p. 9-38 note; oem_spec
Current rating	250 A mains	A	S27 p. 9-38; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00082	NF250SFBJ	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF sub-feed circuit breaker kit, J-frame, 250 A mains

OEM part number	NF250SFBJ	A	S27 oem_spec
Description	NF sub-feed circuit breaker kit, J-frame, 250 A mains	A	S27 p. 9-38; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	JDL, JGL, JJL, JLL, JRL	A	S27 p. 9-38 note; oem_spec
Current rating	250 A mains	A	S27 p. 9-38; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00083	NF600SFBH	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF single/dual sub-feed circuit breaker kit, H-frame, 400 A mains

OEM part number	NF600SFBH	A	S27 oem_spec
Description	NF single/dual sub-feed circuit breaker kit, H-frame, 400 A mains	A	S27, S57 p. 9-38; oem_spec
Application	sub-feed	A	S27 p. 9-38; oem_spec
Breaker compatibility	HDL, HGL, HJL, HLL, HRL; not field-installable in NF with PowerPacT L main	A	same as above
Current rating	400 A mains	A	same as above
Kit contents	Neutral lugs (2), 10-32x7/16 (4), 10-32x5/16 (10), 1/4-20x3/4 (2), 1/4-20x1-1/8 (6), 8-32x3-1/4 (4), support brackets (2), closing plate, SFB deadfront cover, SFB mounting pan, rail extensions (2), rail splices (2), rivets (2), H load lug, H sub-feed cables	A	S57 Kit Contents; oem_spec
Torque values	25-30 lb-in (2.8-3.4 N-m) and 60-65 lb-in (6.8-7.3 N-m) per step	A	S57 oem_spec
OEM instruction document	80043-760-03	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00084	NF600SFBJ	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF single/dual sub-feed circuit breaker kit, J-frame, 400 A mains

OEM part number	NF600SFBJ	A	S27 oem_spec
Description	NF single/dual sub-feed circuit breaker kit, J-frame, 400 A mains	A	S27, S57 p. 9-38; oem_spec
Application	sub-feed	A	S27 p. 9-38; oem_spec
Breaker compatibility	JDL, JGL, JJL, JLL, JRL	A	same as above
Current rating	400 A mains	A	same as above
Kit contents	As NF600SFBH with J load lug and J sub-feed cables	A	S57 Kit Contents; oem_spec
Torque values	25-30 / 60-65 lb-in	A	S57 oem_spec
OEM instruction document	80043-760-03	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00085	NF600SFBPPL	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF sub-feed circuit breaker kit, PowerPacT L, 600 A

OEM part number	NF600SFBPPL	A	S27 oem_spec
Description	NF sub-feed circuit breaker kit, PowerPacT L, 600 A	A	S27, S81 p. 9-38; oem_spec
Application	sub-feed	A	S27 p. 9-38; oem_spec
Current rating	600 A	A	same as above
Kit contents	600 A L-frame screw bag, support brackets, terminal shield bag, escutcheon, deadfront extension/cover/insulator, mounting pan, A/B/C phase connector assemblies, phase insulator, 6 in. rail extensions (2), neutral lug 2x1/0-750 left and right, 18 in. rail extensions (2), rail splices (4)	A	S81 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S81 oem_spec
OEM instruction document	80043-868-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00092	**NFALV1**	NF optional main lug kit, aluminum compression (crimp), 125 A	—	current (listed in 2026 Digest)
EDH-SQD-00095	**NFALV2**	NF optional main lug kit, aluminum compression (crimp), 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00098	**NFALV4**	NF optional main lug kit, aluminum compression (crimp), 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00101	**NFALV6**	NF optional main lug kit, aluminum compression (crimp), 600 A	—	current (listed in 2026 Digest)
EDH-SQD-00093	**NFCUM1**	NF optional main lug kit, copper mechanical, 125 A	—	current (listed in 2026 Digest)
EDH-SQD-00096	**NFCUM2**	NF optional main lug kit, copper mechanical, 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00099	**NFCUM4**	NF optional main lug kit, copper mechanical, 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00102	**NFCUM6**	NF optional main lug kit, copper mechanical, 600 A	—	current (listed in 2026 Digest)
EDH-SQD-00094	**NFCUV1**	NF optional main lug kit, copper compression (crimp), 125 A	—	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00097	**NFCUV2**	NF optional main lug kit, copper compression (crimp), 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00100	**NFCUV4**	NF optional main lug kit, copper compression (crimp), 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00103	**NFCUV6**	NF optional main lug kit, copper compression (crimp), 600 A	—	current (listed in 2026 Digest)

EDH-SQD-00092	NFALV1	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, aluminum compression (crimp), 125 A

OEM part number	NFALV1	A	S27 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 125 A NF main-lug interior	A	S27, S59 p. 9-38; oem_spec
Application	main	A	S27 oem_spec
Current rating	125 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S59 oem_spec
Dimensions	Lug wire range one #4-300 kcmil	A	S27 p. 9-38; oem_spec
Torque values	See bulletin	D	S59 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*NFALV1 requires +6 in. box height for larger wire*		

EDH-SQD-00095	NFALV2	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, aluminum compression (crimp), 250 A

OEM part number	NFALV2	A	S27 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 250 A NF main-lug interior	A	S27, S59 p. 9-38; oem_spec
Application	main	A	S27 oem_spec
Current rating	250 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S59 oem_spec
Dimensions	Lug wire range one 250-350 kcmil	A	S27 p. 9-38; oem_spec
Torque values	See bulletin	D	S59 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00098	NFALV4	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, aluminum compression (crimp), 400 A

OEM part number	NFALV4	A	S27 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 400 A NF main-lug interior	A	S27, S59 p. 9-38; oem_spec
Application	main	A	S27 oem_spec
Current rating	400 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S59 oem_spec
Dimensions	Lug wire range two 2/0-500 kcmil	A	S27 p. 9-38; oem_spec
Torque values	See bulletin	D	S59 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00101	NFALV6	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, aluminum compression (crimp), 600 A

OEM part number	NFALV6	A	S27 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 600 A NF main-lug interior	A	S27, S59 p. 9-38; oem_spec
Application	main	A	S27 oem_spec
Current rating	600 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S59 oem_spec
Dimensions	Lug wire range two 2/0-500 kcmil	A	S27 p. 9-38; oem_spec
Torque values	See bulletin	D	S59 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00093	NFCUM1	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper mechanical, 125 A

OEM part number	NFCUM1	A	S27 oem_spec
Description	Optional copper mechanical main lug kit for 125 A NF main-lug interior	A	S27, S58 p. 9-38; oem_spec
Application	main	A	S27 oem_spec
Current rating	125 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral lug(s), main lugs (3) (600 A: A/C lugs + B-phase lug assembly), 1/4-20 tapping screws	A	S58 oem_spec
Dimensions	Lug wire range #6-2/0	A	S27 p. 9-38; oem_spec
Torque values	Main lugs 60-65 lb-in (6.8-7.3 N-m); 125/250 A neutral 25-30 lb-in	A	S58 oem_spec
OEM instruction document	80043-761-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00096	NFCUM2	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper mechanical, 250 A

OEM part number	NFCUM2	A	S27 oem_spec
Description	Optional copper mechanical main lug kit for 250 A NF main-lug interior	A	S27, S58 p. 9-38; oem_spec
Application	main	A	S27 oem_spec
Current rating	250 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral lug(s), main lugs (3) (600 A: A/C lugs + B-phase lug assembly), 1/4-20 tapping screws	A	S58 oem_spec
Dimensions	Lug wire range #6-250 kcmil	A	S27 p. 9-38; oem_spec
Torque values	Main lugs 60-65 lb-in (6.8-7.3 N-m); 125/250 A neutral 25-30 lb-in	A	S58 oem_spec
OEM instruction document	80043-761-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00099	NFCUM4	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper mechanical, 400 A

OEM part number	NFCUM4	A	S27 oem_spec
Description	Optional copper mechanical main lug kit for 400 A NF main-lug interior	A	S27, S58 p. 9-38; oem_spec
Application	main	A	S27 oem_spec
Current rating	400 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral lug(s), main lugs (3) (600 A: A/C lugs + B-phase lug assembly), 1/4-20 tapping screws	A	S58 oem_spec
Dimensions	Lug wire range one 1/0-750 or two 1/0-350	A	S27 p. 9-38; oem_spec
Torque values	Main lugs 60-65 lb-in (6.8-7.3 N-m); 125/250 A neutral 25-30 lb-in	A	S58 oem_spec
OEM instruction document	80043-761-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00102	NFCUM6	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper mechanical, 600 A

OEM part number	NFCUM6	A	S27 oem_spec
Description	Optional copper mechanical main lug kit for 600 A NF main-lug interior	A	S27, S58 p. 9-38; oem_spec
Application	main	A	S27 oem_spec
Current rating	600 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral lug(s), main lugs (3) (600 A: A/C lugs + B-phase lug assembly), 1/4-20 tapping screws	A	S58 oem_spec
Dimensions	Lug wire range two 1/0-750 kcmil	A	S27 p. 9-38; oem_spec
Torque values	Main lugs 60-65 lb-in (6.8-7.3 N-m); 125/250 A neutral 25-30 lb-in	A	S58 oem_spec
OEM instruction document	80043-761-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00094	NFCUV1	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper compression (crimp), 125 A

OEM part number	NFCUV1	A	S27 oem_spec
Description	Optional copper compression (crimp) main lug kit for 125 A NF main-lug interior	A	S27, S59 p. 9-38; oem_spec
Application	main	A	S27 oem_spec
Current rating	125 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S59 oem_spec
Dimensions	Lug wire range one #6-1/0	A	S27 p. 9-38; oem_spec
Torque values	See bulletin	D	S59 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*NFCUV*: use copper wire only; may need +6 in. box height*		

EDH-SQD-00097	NFCUV2	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper compression (crimp), 250 A

OEM part number	NFCUV2	A	S27 oem_spec
Description	Optional copper compression (crimp) main lug kit for 250 A NF main-lug interior	A	S27, S59 p. 9-38; oem_spec
Application	main	A	S27 oem_spec
Current rating	250 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S59 oem_spec
Dimensions	Lug wire range one 2/0-300 kcmil	A	S27 p. 9-38; oem_spec
Torque values	See bulletin	D	S59 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*NFCUV*: use copper wire only; may need +6 in. box height*		

EDH-SQD-00100	NFCUV4	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper compression (crimp), 400 A

OEM part number	NFCUV4	A	S27 oem_spec
Description	Optional copper compression (crimp) main lug kit for 400 A NF main-lug interior	A	S27, S59 p. 9-38; oem_spec
Application	main	A	S27 oem_spec
Current rating	400 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S59 oem_spec
Dimensions	Lug wire range one 400-750 kcmil	A	S27 p. 9-38; oem_spec
Torque values	See bulletin	D	S59 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*NFCUV*: use copper wire only; may need +6 in. box height*		

EDH-SQD-00103	NFCUV6	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper compression (crimp), 600 A

OEM part number	NFCUV6	A	S27 oem_spec
Description	Optional copper compression (crimp) main lug kit for 600 A NF main-lug interior	A	S27, S59 p. 9-38; oem_spec
Application	main	A	S27 oem_spec
Current rating	600 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S59 oem_spec
Dimensions	Lug wire range two 250-500 kcmil	A	S27 p. 9-38; oem_spec
Torque values	See bulletin	D	S59 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*NFCUV*: use copper wire only; may need +6 in. box height*		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00075	**NF125SFL**	NF sub-feed lug kit, 125 A	Not with 200% neutral kits (factory assembled only) A	current (listed in 2026 Digest)
EDH-SQD-00076	**NF250SFL**	NF sub-feed lug kit, 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00077	**NF400SFL**	NF sub-feed lug kit, 400 A	Copper wire only; requires additional 6 in. box height A	current (listed in 2026 Digest)

EDH-SQD-00075	NF125SFL	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

NF sub-feed lug kit, 125 A

OEM part number	NF125SFL	**A**	S27 oem_spec
Description	NF sub-feed lug kit, 125 A	**A**	S27, S53 p. 9-38; oem_spec
Application	sub-feed	**A**	S27 p. 9-38; oem_spec
Breaker compatibility	Not with 200% neutral kits (factory assembled only)	**A**	S27 p. 9-38 fn; oem_spec
Current rating	125 A	**A**	S27 p. 9-38; oem_spec
Kit contents	Neutral lug (1), 125 A line lugs (3), 1/4-20x3/4 (kit-specific), 1/4-20x9/16 (1)	**A**	S53 Kit Contents; oem_spec
Torque values	Line lugs 60-65 lb-in (6.8-7.3 N-m); neutral lug 25-30 lb-in (2.8-3.4 N-m)	**A**	S53 oem_spec
OEM instruction document	80043-755-01	**A**	same as above
Status	current (listed in 2026 Digest)	**A**	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00076	NF250SFL	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

NF sub-feed lug kit, 250 A

OEM part number	NF250SFL	**A**	S27 oem_spec
Description	NF sub-feed lug kit, 250 A	**A**	S27, S53 p. 9-38; oem_spec
Application	sub-feed	**A**	S27 p. 9-38; oem_spec
Current rating	250 A	**A**	same as above
Kit contents	Neutral lug (1), 250 A line lugs (3), 1/4-20x1-1/8 (kit-specific), 1/4-20x9/16 (1)	**A**	S53 Kit Contents; oem_spec
Torque values	Line lugs 60-65 lb-in; neutral 25-30 lb-in	**A**	S53 oem_spec
OEM instruction document	80043-755-01	**A**	same as above
Status	current (listed in 2026 Digest)	**A**	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00077	NF400SFL	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

NF sub-feed lug kit, 400 A

OEM part number	NF400SFL	**A**	S27 oem_spec
Description	NF sub-feed lug kit, 400 A	**A**	S27, S54 p. 9-38; oem_spec
Application	sub-feed	**A**	S27 p. 9-38; oem_spec
Breaker compatibility	Copper wire only; requires additional 6 in. box height	**A**	S27 p. 9-38 fn; oem_spec
Current rating	400 A	**A**	S27 p. 9-38; oem_spec
Kit contents	Neutral lug (1), line lugs (2), line lug assembly with insulator (1), 1/4-20x1-1/8 (6), 1/4-20x7/8 (2)	**A**	S54 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	**A**	S54 oem_spec
OEM instruction document	80043-756-01	**A**	same as above
Status	current (listed in 2026 Digest)	**A**	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Through Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00078	**NF125FTL**	NF feed-through lug kit, 125 A	—	current (listed in 2026 Digest)
EDH-SQD-00079	**NF250FTL**	NF feed-through lug kit, 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00080	**NF400FTL**	NF feed-through lug kit, 400 A	—	current (listed in 2026 Digest)

EDH-SQD-00078	NF125FTL	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NF feed-through lug kit, 125 A

OEM part number	NF125FTL	A	S27 oem_spec
Description	NF feed-through lug kit, 125 A	A	S27, S55 p. 9-38; oem_spec
Application	through-feed	A	S27 p. 9-38; oem_spec
Current rating	125 A	A	same as above
Kit contents	Neutral lug (1), feed-through lugs (3), 10-32x5/16 (6), 1/4-20x9/16 (1), 1/4-20x3/4 (3), rail extensions (2), rail splices (2), cover extension (1)	A	S55 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S55 oem_spec
OEM instruction document	80043-757-02	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00079	NF250FTL	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NF feed-through lug kit, 250 A

OEM part number	NF250FTL	A	S27 oem_spec
Description	NF feed-through lug kit, 250 A	A	S27, S55 p. 9-38; oem_spec
Application	through-feed	A	S27 p. 9-38; oem_spec
Current rating	250 A	A	same as above
Kit contents	As NF125FTL plus 10-32x7/16 screws and deadfront support brackets (2)	A	S55 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S55 oem_spec
OEM instruction document	80043-757-02	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00080	NF400FTL	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NF feed-through lug kit, 400 A

OEM part number	NF400FTL	A	S27 oem_spec
Description	NF feed-through lug kit, 400 A	A	S27, S56 p. 9-38; oem_spec
Application	through-feed	A	S27 p. 9-38; oem_spec
Current rating	400 A	A	same as above
Kit contents	Neutral lug (1), feed-through lugs (3), 10-32x5/16 (4), 1/4-20x7/8 (2), 1/4-20x1-1/8 (6), 10-32x7/16 (2), barriers (4), rail extensions (2), rail splices (2), cover extension (1)	A	S56 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S56 oem_spec
OEM instruction document	80043-758-02	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00118	**AL100FD**	E-frame mechanical lug kit (3 lugs), 35-125 A (optional for 15-30 A)	—	current (listed in 2026 Digest)
EDH-SQD-00117	**AL30FD**	E-frame mechanical lug kit (3 lugs), 15-30 A	—	current (listed in 2026 Digest)
EDH-SQD-00119	**CU100FD**	E-frame copper mechanical lug kit (3 lugs), 15-125 A	—	current (listed in 2026 Digest)

EDH-SQD-00118	AL100FD	Square D	lug-kit	CURRENT (LISTED IN 202

E-frame mechanical lug kit (3 lugs), 35-125 A (optional for 15-30 A)

OEM part number	AL100FD	A	S27 oem_spec
Description	E-frame mechanical lug kit (3 lugs), 35-125 A (optional for 15-30 A) ; wire one #12-2/0 Al or #14-2/0 Cu for EDB/EGB/EJB load terminals	A	S27 p. 9-33; oem_spec
Installation location	Breaker load terminal (not panel bus)	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00117	AL30FD	Square D	lug-kit	CURRENT (LISTED IN 202

E-frame mechanical lug kit (3 lugs), 15-30 A

OEM part number	AL30FD	A	S27 oem_spec
Description	E-frame mechanical lug kit (3 lugs), 15-30 A ; wire one #12-#6 Al or #14-#6 Cu for EDB/EGB/EJB load terminals	A	S27 p. 9-33; oem_spec
Installation location	Breaker load terminal (not panel bus)	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00119	CU100FD	Square D	lug-kit	CURRENT (LISTED IN 202

E-frame copper mechanical lug kit (3 lugs), 15-125 A

OEM part number	CU100FD	A	S27 oem_spec
Description	E-frame copper mechanical lug kit (3 lugs), 15-125 A ; wire one #14-1/0 Cu for EDB/EGB/EJB load terminals	A	S27 p. 9-33; oem_spec
Installation location	Breaker load terminal (not panel bus)	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00111	**Q1100AN**	Add-on neutral/ground lug, 80-100 A	—	current (listed in 2026 Digest)

EDH-SQD-00111	Q1100AN	Square D	lug	CURRENT (LISTED IN 202

Add-on neutral/ground lug, 80-100 A

OEM part number	Q1100AN	A	S27 oem_spec
Description	Add-on lug for NF neutral or ground bars, #14-1/0 Al/Cu, 80-100 A wire; uses two standard termination spaces	A	S27 p. 9-39; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00104	**SKNF250**	NF branch connector kit, 125/250 A interiors	—	current (FAQ updated 2026)
EDH-SQD-00105	**SKNF600**	NF branch connector kit, 400-800 A interiors	—	listed by distributors

EDH-SQD-00104	SKNF250	Square D	branch-connector-kit	CURRENT (FAQ UPDATED 2

NF branch connector kit, 125/250 A interiors

OEM part number	SKNF250	A	S64 oem_spec
Description	Branch connector (bus finger) kit for 125 A and 250 A NF interiors; fits Series E1 and Series 0	A	S90 oem_spec
Application	branch	A	S64 oem_spec
Installation location	NF phase bus at branch positions	B	S64 inference
Current rating	125-250 A interiors	A	S90 oem_spec
Kit contents	Bulletin: 'A' and 'C' phase branch connectors (3), 'B' phase branch connector (1), 10-32 x 15/16 tapping screws (4). FAQ: three branch busbar fingers plus screws (Quantities differ between bulletin and FAQ)	A	S64, S90 oem_spec
Torque values	Connector screws 30-40 lb-in (bulletin prints 6.74-8.99 N-m, inconsistent - 30-40 lb-in = 3.4-4.5 N-m); EDB/EGB/EJB mounting screws 18-21 lb-in (2.03-2.37 N-m) (Unit inconsistency in OEM text)	A	S64 oem_spec
OEM instruction document	80043-767-01 (08/2008)	A	same as above
Status	current (FAQ updated 2026)	B	S90 inference
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Confirm correct torque (lb-in vs N-m) with Schneider*		

EDH-SQD-00105	SKNF600	Square D	branch-connector-kit	LISTED BY DISTRIBUTORS

NF branch connector kit, 400-800 A interiors

OEM part number	SKNF600	A	S64 oem_spec
Description	Branch connector kit for higher-ampacity NF interiors (covered by same bulletin as SKNF250)	A	same as above
Application	branch	A	same as above
Current rating	400-800 A (distributor listing)	C	distributor
Kit contents	Same item list as SKNF250 in bulletin	A	S64 oem_spec
OEM instruction document	80043-767-01	A	same as above
Status	listed by distributors	C	distributor
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00089	**NFN1CU**	NF copper 100% neutral kit, 125 A	—	current (listed in 2026 Digest)
EDH-SQD-00090	**NFN2CU**	NF copper 100% neutral kit, 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00116	**NFN6CR**	NF/NQ condo riser 100% neutral assembly, 400/600 A, 72 circuits	—	current (listed in 2026 Digest)
EDH-SQD-00091	**NFN6CU**	NF copper 100% neutral kit, 400/600 A	Not to be used with SFL/FTL/SFB (factory assembled only) A	current (listed in 2026 Digest)
EDH-SQD-00086	**NFNL1**	NF 200% neutral kit, 125 A	—	current (listed in 2026 Digest)
EDH-SQD-00087	**NFNL2**	NF 200% neutral kit, 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00088	**NFNL4**	NF 200% neutral kit, 400 A	Not to be used with SFL/FTL/SFB (factory assembled only) A	current (listed in 2026 Digest)

EDH-SQD-00089	NFN1CU	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF copper 100% neutral kit, 125 A

OEM part number	NFN1CU	A	S27 oem_spec
Description	NF merchandised copper 100% neutral kit for 125 A mains	A	S27 p. 9-38; oem_spec
Current rating	125 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x5/16 tapping screws (4)	A	S52 oem_spec
OEM instruction document	80043-754-02 (01/2009)	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00090	NFN2CU	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF copper 100% neutral kit, 250 A

OEM part number	NFN2CU	A	S27 oem_spec
Description	NF merchandised copper 100% neutral kit for 250 A mains	A	S27 p. 9-38; oem_spec
Current rating	250 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x5/16 tapping screws (4)	A	S52 oem_spec
OEM instruction document	80043-754-02 (01/2009)	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00116	NFN6CR	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF/NQ condo riser 100% neutral assembly, 400/600 A, 72 circuits

OEM part number	NFN6CR	A	S27 oem_spec
Alternate / superseded numbers	NFNL6CR (200% version)	A	S27 equivalent; p. 9-16; oem_spec
Description	Condo riser neutral assembly 100%, up to 72 branch circuits, 8.75 in. min enclosure depth	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF, NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00091	NFN6CU	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF copper 100% neutral kit, 400/600 A

OEM part number	NFN6CU	A	S27 oem_spec
Description	NF merchandised copper 100% neutral kit for 400/600 A mains	A	S27 p. 9-38; oem_spec
Breaker compatibility	Not to be used with SFL/FTL/SFB (factory assembled only)	A	S27 p. 9-38 fn 1; oem_spec
Current rating	400/600 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral assembly (1), 10-32x5/16 tapping screws (4)	A	S52 oem_spec
OEM instruction document	80043-754-02 (01/2009)	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00086	NFNL1	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF 200% neutral kit, 125 A

OEM part number	NFNL1	A	S27 oem_spec
Description	NF merchandised 200% neutral kit for 125 A mains	A	S27 p. 9-38; oem_spec
Current rating	125 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x5/16 tapping screws (4)	A	S52 oem_spec
OEM instruction document	80043-754-02 (01/2009)	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00087	NFNL2	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF 200% neutral kit, 250 A

OEM part number	NFNL2	A	S27 oem_spec
Description	NF merchandised 200% neutral kit for 250 A mains	A	S27 p. 9-38; oem_spec
Current rating	250 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x5/16 tapping screws (4)	A	S52 oem_spec
OEM instruction document	80043-754-02 (01/2009)	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00088	NFNL4	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF 200% neutral kit, 400 A

OEM part number	NFNL4	A	S27 oem_spec
Description	NF merchandised 200% neutral kit for 400 A mains	A	S27 p. 9-38; oem_spec
Breaker compatibility	Not to be used with SFL/FTL/SFB (factory assembled only)	A	S27 p. 9-38 fn 1; oem_spec
Current rating	400 A	A	S27 p. 9-38; oem_spec
Kit contents	Neutral assembly (1), 10-32x5/16 tapping screws (4)	A	S52 oem_spec
OEM instruction document	80043-754-02 (01/2009)	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00110	**NFES18**	NF equipment space kit (18 in.)	—	unknown

EDH-SQD-00110	NFES18	Square D	mounting-bracket	UNKNOWN

NF equipment space kit (18 in.)

OEM part number	NFES18	A	S51 oem_spec
Description	Equipment space kit for NF interior	A	same as above
Kit contents	Mounting pan (1), barrier (1), rail splices (2), 10-32x7/8 (4)	A	same as above
OEM instruction document	80043-753-01	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Mounting Rail

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00107	**NF12RDE**	NF 12 in. rail and deadfront extension kit	—	current (listed in 2026 Digest)
EDH-SQD-00108	**NF18RDE**	NF 18 in. rail and deadfront extension kit	—	current (listed in 2026 Digest)
EDH-SQD-00106	**NF6RDE**	NF 6 in. rail and deadfront extension kit	—	current (listed in 2026 Digest)

EDH-SQD-00107	NF12RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NF 12 in. rail and deadfront extension kit

OEM part number	NF12RDE	A	S27 oem_spec
Description	12 in. rail and deadfront extension for NF interiors	A	S27 p. 9-39; oem_spec
Kit contents	10-32x5/16 (6), deadfront cover (1), rail extensions (2), rail splices (2), plus support brackets and 10-32x7/16	A	S60 oem_spec
OEM instruction document	80043-763-01 (06/2008)	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-39; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00108	NF18RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NF 18 in. rail and deadfront extension kit

OEM part number	NF18RDE	A	S27 oem_spec
Description	18 in. rail and deadfront extension for NF interiors	A	S27 p. 9-39; oem_spec
Kit contents	10-32x5/16 (6), deadfront cover (1), rail extensions (2), rail splices (2), plus support brackets and 10-32x7/16	A	S60 oem_spec
OEM instruction document	80043-763-01 (06/2008)	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-39; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00106	NF6RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NF 6 in. rail and deadfront extension kit

OEM part number	NF6RDE	A	S27 oem_spec
Description	6 in. rail and deadfront extension for NF interiors	A	S27 p. 9-39; oem_spec
Kit contents	10-32x5/16 (4), deadfront cover (1), rail extensions (2), rail splices (2)	A	S60 oem_spec
OEM instruction document	80043-763-01 (06/2008)	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-39; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00074	**NFBFMB20**	NF back-fed main circuit breaker barrier kit	—	unknown
EDH-SQD-00069	**NFEDBS**	NF U.S. service entrance barrier kit (E-frame main)	—	current (listed in 2026 Digest)
EDH-SQD-00070	**NFHJLLC**	NF U.S. service entrance barrier kit (H/J main)	—	current (listed in 2026 Digest)
EDH-SQD-00071	**NFLALLC**	NF U.S. service entrance barrier kit (LA/LH main)	—	current (listed in 2026 Digest)
EDH-SQD-00072	**NFPPLLLC**	NF U.S. service entrance barrier kit (PowerPacT L main)	Requires medium terminal shield LTSM3P (not included) A	current (listed in 2026 Digest)
EDH-SQD-00073	**NFPPPLLC**	NF U.S. service entrance barrier kit (PowerPacT P main)	—	current (listed in 2026 Digest)

EDH-SQD-00074	NFBFMB20	Square D	barrier	UNKNOWN

NF back-fed main circuit breaker barrier kit

OEM part number	NFBFMB20	A	S67 oem_spec
Description	Back-fed main circuit breaker barrier (adhesive) for NF panelboard	A	same as above
Kit contents	Back-fed main circuit breaker barrier (1)	A	same as above
OEM instruction document	80043-774-01 (04/2009)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00069	NFEDBS	Square D	barrier	CURRENT (LISTED IN 202

NF U.S. service entrance barrier kit (E-frame main)

OEM part number	NFEDBS	A	S27 oem_spec
Description	NF E-frame (back-fed EDB/EGB/EJB 125 A 3P main) line lug cover and neutral bonding strap (required by NEC 2017+ for service entrance)	A	S27 p. 9-39; oem_spec
Application	main (service entrance)	A	S27 oem_spec
OEM instruction document	80043-839-01 Rev. 04 Table 6 (NFEDBS footnoted)	A	S72 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-39; oem_spec
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00070	NFHJLLC	Square D	barrier	CURRENT (LISTED IN 202

NF U.S. service entrance barrier kit (H/J main)

OEM part number	NFHJLLC	A	S27 oem_spec
Description	NF H/J line lug cover and neutral bonding strap (required by NEC 2017+ for service entrance)	A	S27 p. 9-39; oem_spec
Application	main (service entrance)	A	S27 oem_spec
OEM instruction document	80043-839-01 Rev. 04 Table 6	A	S72 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-39; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00071	NFLALLC	Square D	barrier	CURRENT (LISTED IN 202

NF U.S. service entrance barrier kit (LA/LH main)

OEM part number	NFLALLC	A	S27 oem_spec
Description	NF LA/LH line lug cover and neutral bonding strap (required by NEC 2017+ for service entrance)	A	S27 p. 9-39; oem_spec
Application	main (service entrance)	A	S27 oem_spec
OEM instruction document	80043-839-01 Rev. 04 Table 6	A	S72 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-39; oem_spec
Cross-links	Families: NF · Breakers: LA / LH (L-frame, legacy thermal-magnetic)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00072	NFPPLLLC	Square D	barrier	CURRENT (LISTED IN 202

NF U.S. service entrance barrier kit (PowerPacT L main)

OEM part number	NFPPLLLC	**A**	S27 oem_spec
Description	NF PowerPacT L line lug cover and neutral bonding strap (required by NEC 2017+ for service entrance)	**A**	S27 p. 9-39; oem_spec
Application	main (service entrance)	**A**	S27 oem_spec
Breaker compatibility	Requires medium terminal shield LTSM3P (not included)	**A**	S72 oem_spec
OEM instruction document	80043-839-01 Rev. 04 Table 6	**A**	same as above
Status	current (listed in 2026 Digest)	**A**	S27 p. 9-39; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00073	NFPPPLLC	Square D	barrier	CURRENT (LISTED IN 202

NF U.S. service entrance barrier kit (PowerPacT P main)

OEM part number	NFPPPLLC	**A**	S27 oem_spec
Description	NF PowerPacT P line lug cover and neutral bonding strap (required by NEC 2017+ for service entrance)	**A**	S27 p. 9-39; oem_spec
Application	main (service entrance)	**A**	S27 oem_spec
OEM instruction document	80043-839-01 Rev. 04 Table 6	**A**	S72 oem_spec
Status	current (listed in 2026 Digest)	**A**	S27 p. 9-39; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT M / P / R frame (I-Line)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00112	**NFRPLMB6PPL**	NF PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A	—	unknown
EDH-SQD-00113	**NFRPLMB8PPMP**	NF 800 A PowerPacT M/P main breaker deadfront replacement kit	—	unknown

EDH-SQD-00112	NFRPLMB6PPL	Square D	deadfront	UNKNOWN

NF PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A

OEM part number	NFRPLMB6PPL	**A**	S76 oem_spec
Alternate / superseded numbers	NFRPLMB63RPPL [equivalent] (600 A version for MH vented NEMA 3R)	**A**	same as above
Description	Replacement deadfront set for NF 400/600 A PowerPacT L main and sub-feed breaker	**A**	same as above
OEM instruction document	80043-848-01 (10/2020)	**A**	same as above
Status	unknown	**D**	oem_spec
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00113	NFRPLMB8PPMP	Square D	deadfront	UNKNOWN

NF 800 A PowerPacT M/P main breaker deadfront replacement kit

OEM part number	NFRPLMB8PPMP	A	S79 oem_spec
Description	NF 800 A PowerPacT M-frame and P-frame main circuit breaker deadfront replacement kit	A	same as above
Kit contents	Label bag, replacement screw bag, deadfront extension, deadfront cover, deadfront insulator	A	same as above
OEM instruction document	80043-861-01 (07/2021)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NF · Breakers: PowerPacT M / P / R frame (I-Line)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00109	**NFFP15**	NF filler plates (15 per package)	—	current (listed in 2026 Digest)

EDH-SQD-00109	NFFP15	Square D	filler-plate	CURRENT (LISTED IN 202

NF filler plates (15 per package)

OEM part number	NFFP15	A	S27 oem_spec
Description	Filler plate, 15 per package	A	S27 p. 9-39; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00699	**NC59TS**	NF column-width (single-row) screw-cover front, 59 in box, surface	—	unknown
EDH-SQD-00693	**NC62VS3PNF**	NF three-point latch trim front, surface, 62 in (PowerPacT L/M/P)	—	unknown
EDH-SQD-00700	**NC65TS**	NF column-width (single-row) screw-cover front, 65 in box, surface	—	unknown
EDH-SQD-00694	**NC68VS3PNF**	NF three-point latch trim front, surface, 68 in (PowerPacT L/M/P)	—	unknown
EDH-SQD-00701	**NC71TS**	NF column-width (single-row) screw-cover front, 71 in box, surface	—	unknown
EDH-SQD-00695	**NC74VS3PNF**	NF three-point latch trim front, surface, 74 in (PowerPacT L/M/P)	—	unknown
EDH-SQD-00696	**NC80VS3PNF**	NF three-point latch trim front, surface, 80 in (PowerPacT L/M/P)	—	unknown
EDH-SQD-00702	**NC85TS**	NF column-width (single-row) screw-cover front, 85 in box, surface	—	unknown
EDH-SQD-00697	**NC86VS3PNF**	NF three-point latch trim front, surface, 86 in (PowerPacT L/M/P)	—	unknown
EDH-SQD-00698	**NC92VS3PNF**	NF three-point latch trim front, surface, 92 in (PowerPacT L/M/P)	—	unknown

EDH-SQD-00699	NC59TS	Square D	trim	STATUS UNKNOWN

NF column-width (single-row) screw-cover front, 59 in box, surface

OEM part number	NC59TS	A	S27 Digest Sec.9 Table 9.88 p.9-44; oem_spec
Description	Surface-mount screw-cover front for NF single-row (column-width) panelboard; box 9.69 in W (8.625 in box + flange) x 5.625 in D, 59 in high; used with NF8430L1C	A	S27 oem_spec
Cross-links	Families: NF		

EDH-SQD-00693	NC62VS3PNF	Square D	trim	STATUS UNKNOWN

NF three-point latch trim front, surface, 62 in (PowerPacT L/M/P)

OEM part number	NC62VS3PNF	A	S48 80043-741-03 Table 6 p.25; oem_spec
Alternate / superseded numbers	NC62VF3PNF (flush mounted)	A	S48 alias; oem_spec
	NC62VS3PNFHR [alias] (hinged, surface)	A	same as above
	NC62VF3PNFHR [alias] (hinged, flush)	A	same as above
Description	Three-point latch trim front for NF panelboard, surface mounted (V=Vented, 3P=Three Point); required for PowerPacT L-, M- and P-frame breakers	A	same as above
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Dimensions		

EDH-SQD-00700	NC65TS	Square D	trim	STATUS UNKNOWN

NF column-width (single-row) screw-cover front, 65 in box, surface

OEM part number	NC65TS	A	S27 Digest Sec.9 Table 9.88 p.9-44; oem_spec
Description	Surface-mount screw-cover front for NF single-row (column-width) panelboard; box 9.69 in W (8.625 in box + flange) x 5.625 in D, 65 in high; used with NF8430M1C / NF8430M1HDC	A	S27 oem_spec
Cross-links	Families: NF		

EDH-SQD-00694	NC68VS3PNF	Square D	trim	STATUS UNKNOWN

NF three-point latch trim front, surface, 68 in (PowerPacT L/M/P)

OEM part number	NC68VS3PNF	A	S48 80043-741-03 Table 6 p.25; oem_spec
Alternate / superseded numbers	NC68VF3PNF (flush mounted)	A	S48 alias; oem_spec
	NC68VS3PNFHR [alias] (hinged, surface)	A	same as above
	NC68VF3PNFHR [alias] (hinged, flush)	A	same as above
Description	Three-point latch trim front for NF panelboard, surface mounted (V=Vented, 3P=Three Point); required for PowerPacT L-, M- and P-frame breakers	A	same as above
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Dimensions		

EDH-SQD-00701	NC71TS	Square D	trim	STATUS UNKNOWN

NF column-width (single-row) screw-cover front, 71 in box, surface

OEM part number	NC71TS	A	S27 Digest Sec.9 Table 9.88 p.9-44; oem_spec
Description	Surface-mount screw-cover front for NF single-row (column-width) panelboard; box 9.69 in W (8.625 in box + flange) x 5.625 in D, 71 in high; used with NF8442L2C	A	S27 oem_spec
Cross-links	Families: NF		

EDH-SQD-00695	NC74VS3PNF	Square D	trim	STATUS UNKNOWN

NF three-point latch trim front, surface, 74 in (PowerPacT L/M/P)

OEM part number	NC74VS3PNF	A	S48 80043-741-03 Table 6 p.25; oem_spec
Alternate / superseded numbers	NC74VF3PNF (flush mounted)	A	S48 alias; oem_spec
	NC74VS3PNFHR [alias] (hinged, surface)	A	same as above
	NC74VF3PNFHR [alias] (hinged, flush)	A	same as above
Description	Three-point latch trim front for NF panelboard, surface mounted (V=Vented, 3P=Three Point); required for PowerPacT L-, M- and P-frame breakers	A	same as above
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Dimensions		

EDH-SQD-00696	NC80VS3PNF	Square D	trim	STATUS UNKNOWN

NF three-point latch trim front, surface, 80 in (PowerPacT L/M/P)

OEM part number	NC80VS3PNF	A	S48 80043-741-03 Table 6 p.25; oem_spec
Alternate / superseded numbers	NC80VF3PNF (flush mounted)	A	S48 alias; oem_spec
	NC80VS3PNFHR [alias] (hinged, surface)	A	same as above
	NC80VF3PNFHR [alias] (hinged, flush)	A	same as above
Description	Three-point latch trim front for NF panelboard, surface mounted (V=Vented, 3P=Three Point); required for PowerPacT L-, M- and P-frame breakers	A	same as above
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Dimensions		

EDH-SQD-00702	NC85TS	Square D	trim	STATUS UNKNOWN

NF column-width (single-row) screw-cover front, 85 in box, surface

OEM part number	NC85TS	A	S27 Digest Sec.9 Table 9.88 p.9-44; oem_spec
Description	Surface-mount screw-cover front for NF single-row (column-width) panelboard; box 9.69 in W (8.625 in box + flange) x 5.625 in D, 85 in high; used with NF8442M2JDC	A	S27 oem_spec
Cross-links	Families: NF		

EDH-SQD-00697	NC86VS3PNF	Square D	trim	STATUS UNKNOWN

NF three-point latch trim front, surface, 86 in (PowerPacT L/M/P)

OEM part number	NC86VS3PNF	A	S48 80043-741-03 Table 6 p.25; oem_spec
Alternate / superseded numbers	NC86VF3PNF (flush mounted)	A	S48 alias; oem_spec
	NC86VS3PNFHR [alias] (hinged, surface)	A	same as above
	NC86VF3PNFHR [alias] (hinged, flush)	A	same as above
Description	Three-point latch trim front for NF panelboard, surface mounted (V=Vented, 3P=Three Point); required for PowerPacT L-, M- and P-frame breakers	A	same as above
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Dimensions		

EDH-SQD-00698	NC92VS3PNF	Square D	trim	STATUS UNKNOWN

NF three-point latch trim front, surface, 92 in (PowerPacT L/M/P)

OEM part number	NC92VS3PNF	A	S48 80043-741-03 Table 6 p.25; oem_spec
Alternate / superseded numbers	NC92VF3PNF (flush mounted)	A	S48 alias; oem_spec
	NC92VS3PNFHR [alias] (hinged, surface)	A	same as above
	NC92VF3PNFHR [alias] (hinged, flush)	A	same as above
Description	Three-point latch trim front for NF panelboard, surface mounted (V=Vented, 3P=Three Point); required for PowerPacT L-, M- and P-frame breakers	A	same as above
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Dimensions		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00605	**MHT2DH20**	Drip hood for 20 in wide MH enclosures (NF)	—	unknown
EDH-SQD-00711	**NTX836**	Cable trough 36 in for NF column-width panelboard	—	unknown
EDH-SQD-00712	**NTX848**	Cable trough 48 in for NF column-width panelboard	—	unknown
EDH-SQD-00713	**NTX856**	Cable trough 56 in for NF column-width panelboard	—	unknown
EDH-SQD-00714	**NTX866**	Cable trough 66 in for NF column-width panelboard	—	unknown

EDH-SQD-00605	MHT2DH20	Square D	box/enclosure	STATUS UNKNOWN

Drip hood for 20 in wide MH enclosures (NF)

OEM part number	MHT2DH20	A	S27 Digest Sec.9 NF accessories (p.~9-37); oem_spec
Description	Drip Hood for 20 in. wide enclosures	A	S27 oem_spec
Cross-links	Families: NF, NQ		
Not yet documented	Dimensions, enclosure rating change		

EDH-SQD-00711	NTX836	Square D	box/enclosure	STATUS UNKNOWN

Cable trough 36 in for NF column-width panelboard

OEM part number	NTX836	A	S27 Digest Sec.9 Tables 9.87 / 9.89; oem_spec
Description	Cable trough, length 36 in, cross-section 9.69 x 5.625 in, standard with trough barrier, for single-row (column width) panelboards	A	S27 oem_spec
Cross-links	Families: NF		

EDH-SQD-00712	NTX848	Square D	box/enclosure	STATUS UNKNOWN

Cable trough 48 in for NF column-width panelboard

OEM part number	NTX848	A	S27 Digest Sec.9 Tables 9.87 / 9.89; oem_spec
Description	Cable trough, length 48 in, cross-section 9.69 x 5.625 in, standard with trough barrier, for single-row (column width) panelboards	A	S27 oem_spec
Cross-links	Families: NF		

EDH-SQD-00713	NTX856	Square D	box/enclosure	STATUS UNKNOWN

Cable trough 56 in for NF column-width panelboard

OEM part number	NTX856	A	S27 Digest Sec.9 Tables 9.87 / 9.89; oem_spec
Description	Cable trough, length 56 in, cross-section 9.69 x 5.625 in, standard with trough barrier, for single-row (column width) panelboards	A	S27 oem_spec
Cross-links	Families: NF		

EDH-SQD-00714	NTX866	Square D	box/enclosure	STATUS UNKNOWN

Cable trough 66 in for NF column-width panelboard

OEM part number	NTX866	A	S27 Digest Sec.9 Tables 9.87 / 9.89; oem_spec
Description	Cable trough, length 66 in, cross-section 9.69 x 5.625 in, standard with trough barrier, for single-row (column width) panelboards	A	S27 oem_spec
Cross-links	Families: NF		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00115	**NFCRBOND8**	NF 800 A U.S. condo riser neutral bonding strap kit	—	unknown
EDH-SQD-00114	**NFNQCRBOND46**	NQ/NF U.S. condo riser neutral bonding strap kit (400/600 A)	—	unknown
EDH-SQD-00120	**TIKFD**	E-frame terminal nut insert kit (3 per kit)	—	current (listed in 2026 Digest)

EDH-SQD-00115	NFCRBOND8	Square D	hardware-kit	UNKNOWN

NF 800 A U.S. condo riser neutral bonding strap kit

OEM part number	NFCRBOND8	A	S77 oem_spec
Description	NF 800 A condo riser neutral bonding strap (100% and 200%)	A	same as above
Kit contents	Bonding strap (1), 10-32 x .31 screws (2), bulletin	A	same as above
OEM instruction document	80043-853-01	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00114	NFNQCRBOND46	Square D	hardware-kit	UNKNOWN

NQ/NF U.S. condo riser neutral bonding strap kit (400/600 A)

OEM part number	NFNQCRBOND46	A	S77 oem_spec
Description	Neutral bonding strap kit for NQ/NF condo riser panelboards	A	same as above
Kit contents	Bonding strap condo riser 100% 1.4 in. high (1), 200% 1.7 in. high (1), 10-32 x .31 pan head square-slot screws (2), bulletin	A	same as above
Dimensions	Strap heights 1.4 in. (100%) and 1.7 in. (200%)	A	same as above
Torque values	20-25 lb-in (4.5-5.6 N-m) as printed	A	same as above
OEM instruction document	80043-853-01 (08/2020)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NF, NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00120	TIKFD	Square D	hardware-kit	CURRENT (LISTED IN 202

E-frame terminal nut insert kit (3 per kit)

OEM part number	TIKFD	A	S27 oem_spec
Description	E-frame terminal nut insert kit (3 per kit) for EDB/EGB/EJB load terminals	A	S27 p. 9-33; oem_spec
Installation location	Breaker load terminal (not panel bus)	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00945	**AHEXLI**	Square D Handle extension, Q4 2/3-pole	Q4 2/3-pole **A**	unknown

EDH-SQD-00945	AHEXLI	Square D	breaker-accessory	STATUS UNKNOWN

Square D Handle extension, Q4 2/3-pole

OEM part number	AHEXLI	A	S183 p. 3-24, Table 3.64 Handle Accessories; oem_spec
Description	Handle extension, Q4 2/3-pole.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Q4 2/3-pole	A	same as above
Cross-links	Families: NF, I-LINE · Breakers: Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Material, Status		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00944	**FA3HT**	Square D California Title 24 combination handle tie and lock off, (3) 1P FA	(3) 1P FA **A**	unknown
EDH-SQD-00941	**FKHT**	Square D Handle tie for (2) FA breakers, 3-pole	(2) FA **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00943	**FY3HT**	Square D California Title 24 combination handle tie and lock off, (3) 1P FY	(3) 1P FY **A**	unknown
EDH-SQD-00942	**LAHT**	Square D Handle tie for 2 LA or 2 Q4 breakers	2 LA or 2 Q4, 2/3-pole **A**	unknown

EDH-SQD-00944 **FA3HT** Square D handle-lock **STATUS UNKNOWN**

Square D California Title 24 combination handle tie and lock off, (3) 1P FA

OEM part number	FA3HT	**A**	S183 p. 3-24, Table 3.64 Handle Accessories; oem_spec
Description	California Title 24 combination handle tie and lock off, (3) 1P FA.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	(3) 1P FA	**A**	same as above
Cross-links	Families: NF, I-LINE · Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00941 **FKHT** Square D handle-lock **STATUS UNKNOWN**

Square D Handle tie for (2) FA breakers, 3-pole

OEM part number	FKHT	**A**	S183 p. 3-24, Table 3.64 Handle Accessories; oem_spec
Description	Handle tie for (2) FA breakers, 3-pole.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	(2) FA	**A**	same as above
Cross-links	Families: NF, I-LINE · Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00943 **FY3HT** Square D handle-lock **STATUS UNKNOWN**

Square D California Title 24 combination handle tie and lock off, (3) 1P FY

OEM part number	FY3HT	**A**	S183 p. 3-24, Table 3.64 Handle Accessories; oem_spec
Description	California Title 24 combination handle tie and lock off, (3) 1P FY.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	(3) 1P FY	**A**	same as above
Cross-links	Families: NF, I-LINE · Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00942 **LAHT** Square D handle-lock **STATUS UNKNOWN**

Square D Handle tie for 2 LA or 2 Q4 breakers

OEM part number	LAHT	**A**	S183 p. 3-24, Table 3.64 Handle Accessories; oem_spec
Description	Handle tie for 2 LA or 2 Q4 breakers.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	2 LA or 2 Q4, 2/3-pole	**A**	same as above
Cross-links	Families: NF, I-LINE · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Material, Status		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00960	**EDPAF**	Square D fixed OFF padlock attachment for ED/EG/EJ (distributor listing)	ED, EG, EJ **C**	unknown
EDH-SQD-00959	**HPAFD**	Square D handle padlock attachment for EDB/EGB/EJB	EDB, EGB, EJB **A**	unknown
EDH-SQD-00546	**HPA-FK**	Square D padlock attachment for FA and KA breakers	FA, FH 1/2/3-pole; FY Series 2 2/3-pole **A**	1970 catalog item; current status unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00547	**HPA-FYQ**	Square D padlock attachment for Q2 and FY breakers	FY Series 1, 1-pole **A**	1970 catalog item; current status unknown
EDH-SQD-00548	**HPA-LM**	Square D padlock attachment for LA and MA (permanent trip) breakers	LA, LH, Q4 2/3-pole **A**	1970 catalog item; current status unknown
EDH-SQD-00946	**HPAXLM**	Square D handle padlock attachment (locks ON or OFF) HPAXLM	LA, LH, Q4 2/3-pole (alternate listed with HPALM) **A**	unknown

EDH-SQD-00960	**EDPAF**	Square D	padlock-attachment	STATUS UNKNOWN

Square D fixed OFF padlock attachment for ED/EG/EJ (distributor listing)

OEM part number	EDPAF	**C**	S646 distributor listing; distributor
Description	Fixed OFF padlock attachment for ED, EG, EJ circuit breakers (distributor description only).	**C**	same as above
Breaker compatibility	ED, EG, EJ	**C**	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Dimensions, Material, Status		
Open question	*Not found in an OEM table yet.*		

EDH-SQD-00959	**HPAFD**	Square D	padlock-attachment	STATUS UNKNOWN

Square D handle padlock attachment for EDB/EGB/EJB

OEM part number	HPAFD	**A**	S642 p. 3, Handle Accessories; oem_spec
Alternate / superseded numbers	EDPA (Distributor-described fixed padlock attachment for ED/EG/EJ 1-3P; relationship to HPAFD unknown)	**C**	S646 equivalent; distributor listing; distributor
Description	Handle padlock attachment (locks ON or OFF) for EDB, EGB, EJB 480Y/277 Vac lighting panelboard breakers.	**A**	S642 p. 3, Handle Accessories; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	EDB, EGB, EJB	**A**	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00546	**HPA-FK**	Square D	padlock-attachment	1970 CATALOG ITEM; CUR

Square D padlock attachment for FA and KA breakers

OEM part number	HPA-FK	**A**	S463, S183 oem_spec
Description	FA and KA - HPA-FK $2.30	**A**	S463 Digest 152 (1970) p.84; oem_spec
	Handle padlock attachment (locks ON or OFF).	**A**	S183 p. 3-24, Table 3.64 Handle Accessories; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	FA, FH 1/2/3-pole; FY Series 2 2/3-pole	**A**	same as above
Status	1970 catalog item; current status unknown	**D**	S463 inference
Cross-links	Families: NF, I-LINE, NH1B · Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A), Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	current_status, Dimensions, Material		
Open question	*Hyphenated forms HPA-FK / HPA-LM / HPA-FYQ from Digest 152 (1970) exist in catalogue - same parts.*		

EDH-SQD-00547	HPA-FYQ	Square D	padlock-attachment	1970 CATALOG ITEM; CUR

Square D padlock attachment for Q2 and FY breakers

OEM part number	HPA-FYQ	A	S463, S183 oem_spec
Description	Q2 and FY - HPA-FYQ $2.00	A	S463 Digest 152 (1970) p.84; oem_spec
	Handle padlock attachment (locks ON or OFF).	A	S183 p. 3-24, Table 3.64 Handle Accessories; oem_spec
Application	accessory	A	same as above
Breaker compatibility	FY Series 1, 1-pole	A	same as above
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NF, I-LINE, NH1B · Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	current_status, Dimensions, Material		
Open question	*Hyphenated forms HPA-FK / HPA-LM / HPA-FYQ from Digest 152 (1970) exist in catalogue - same parts.*		

EDH-SQD-00548	HPA-LM	Square D	padlock-attachment	1970 CATALOG ITEM; CUR

Square D padlock attachment for LA and MA (permanent trip) breakers

OEM part number	HPA-LM	A	S463, S183 oem_spec
Description	LA and MA (Permanent trip type) - HPA-LM $2.70	A	S463 Digest 152 (1970) p.84; oem_spec
	Handle padlock attachment (locks ON or OFF).	A	S183 p. 3-24, Table 3.64 Handle Accessories; oem_spec
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4 2/3-pole	A	same as above
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NF, I-LINE · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	current_status, Dimensions, Material		
Open question	*Hyphenated forms HPA-FK / HPA-LM / HPA-FYQ from Digest 152 (1970) exist in catalogue - same parts.*		

EDH-SQD-00946	HPAXLM	Square D	padlock-attachment	STATUS UNKNOWN

Square D handle padlock attachment (locks ON or OFF) HPAXLM

OEM part number	HPAXLM	A	S183 p. 3-24, Table 3.64 Handle Accessories; oem_spec
Description	Handle padlock attachment (locks ON or OFF).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4 2/3-pole (alternate listed with HPALM)	A	same as above
Cross-links	Families: NF, I-LINE · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, Material, Status		
Open question	*Hyphenated forms HPA-FK / HPA-LM / HPA-FYQ from Digest 152 (1970) exist in catalogue - same parts.*		

4.7 NH1B — Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)

FAM-SQD-014 · panelboard · aka NH1B, NHIB, NH1B-LX, MH1B (OCR) · markings: Square D

Square D's 1970 480Y/277 V lighting panelboard (NH1B) with distributed phase bussing, FY single-pole and FA multi-pole branch breakers, galvanized boxes with MONO-FLAT front with door, gray baked enamel. Column-width NH1B-LX exists. I-Line box extension HC-2609-EXF/S serves 'HCN or NH1B'. Distinct from the Westinghouse and FPE NH1B designations.

Attribute	Value	Cl.	Sources
Status	Obsolete (inference; superseded by NEHB then NF)	D	inference
Era of manufacture	Catalogued in Square D Digest 152 (1970); NEHB is not in the 1970 index (later successor - inference)	A	S463 Digest 152 (1970) p.55, 68; oem_spec
Successor	NEHB, then NF (inference from Schneider NEHB->NF guidance)	D	S459 inference
Voltage rating	480 V AC max, AC only; 277/480 V 3-ph 4W, 480 V; 1-ph 2W/3W, 3-ph 3W/4W	A	S463 Digest 152 (1970) p.68; oem_spec
Main ampacity	Main lugs 100 A, 225 A (1-300 MCM), 400 A (2-600 MCM); main breakers 100/225/400 A; NH1B-LX 225 A	A	same as above
Branch breakers accepted	FY 1-pole 15-50 A (277 V AC max) and FA 2/3-pole 15-100 A, plug-on or bolt-on (LX bolt-on FA 15-50 A)	A	S463 Digest 152 (1970) p.55, 68; oem_spec
Finish / plating	MONO-FLAT fronts with door, gray baked enamel, flush lock	A	S463 Digest 152 (1970) p.68; oem_spec

Key documents: S459 Schneider Electric FAQ group on NQO/NQOB, NEHB, NA1B, NY1B (FA97632, FA124608, FA232958, F; S463 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P
Also fits this family (entry printed elsewhere): PK27GTA, PK23GTA, HLO-1, HPA-FK, HPA-FYQ, QO-1CP, PK-3SP, PK-49SP, PK-9GTA, PK-4FL, HC-2609-EXF

4.8 NQ — NQ panelboard (Class 1640)

FAM-SQD-001 · panelboard · aka NQ RTI, NQ lighting panelboard, NQ14 (14-inch-wide) · markings: Schneider Electric, Square D

Current Square D 240 Vac / 48 Vdc lighting and appliance panelboard, 20 in. wide MH box (14 in. NQ14 variant), merchandised as ready-to-install (RTI) interiors plus field-installable kits (main breaker adapter kits NQMB*, sub-feed/feed-through lug kits, neutral kits, rail/deadfront extensions). Accepts QO plug-on and QOB bolt-on branch breakers; tandem breakers not allowed. Mains 100-600 A main lug or main breaker (QOB/QOB-VH back-fed, PowerPacT Q/H/J vertical, LA/LH, PowerPacT L).

Attribute	Value	Cl.	Sources
Status	current	A	S27 p. 9-7 ff.; oem_spec
Era of manufacture	2008-present (replaced NQOD in 2008)	A	S87 oem_spec
Voltage rating	240 Vac, 48 Vdc max	A	S27 p. 9-9; oem_spec
Main ampacity	100, 225, 400, 600 A merchandised (250 A main breaker interiors factory-assembled only)	A	S27, S29 p. 9-9/9-10; oem_spec
Branch breakers accepted	QO plug-on and QOB bolt-on (incl. -VH, -H, AFCI/GFI); 175/200 A QO only in single-phase 400/600 A interiors	A	S27 p. 9-9 footnotes; oem_spec

Breaker families associated: KI / KC frame (legacy), LA / LH (L-frame, legacy thermal-magnetic), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR), PowerPacT L-frame (LG/LJ/LL/LR), PowerPacT Q-frame (QB/QD/QG/QJ), QO (plug-on), QOB (bolt-on)
Key documents: S27 0100CT2401-SEC-09 Panelboards: Digest Section 9 (Square D Digest, Section 9 Panelboards); S28 Digest 0100CT2401 (online) Schneider Electric Digest Plus - Section 9: Panelboards (online HTML pages: NQ Panelboard ; S29 1640CT0801 NQ Circuit Breaker Panelboards Catalog, Class 1640; S32 Square D NQ and NF Lighting Panelboards brochure; S87 FA332061 Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO /
Also fits this family (entry printed elsewhere): NFNQCRBOND46, NFN6CR, MHT2DH20, 8003115901, PK4NVL, LP9502

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00003	**NQMB2HJ**	NQ main circuit breaker adapter kit, H/J-frame, 225 A	HD, HG, HJ, HL, HR, JD, JG, JJ, JL, JR; 3-pole breaker used for single A	current (listed in 2026 Digest)
EDH-SQD-00004	**NQMB2HJ14**	NQ14 main circuit breaker adapter kit, H/J-frame (14-inch-wide interiors)	HD, HG, HJ, HL, HR, JD, JG, JJ, JL A	current (listed in 2026 Digest)
EDH-SQD-00005	**NQMB2KI**	NQ main circuit breaker adapter kit, KI-frame, 225 A (legacy)	—	not in 2026 Digest; presumed discontinued
EDH-SQD-00001	**NQMB2Q**	NQ main circuit breaker adapter kit, Q-frame, 225 A	PowerPacT Q-frame QB, QD, QG, QJ (225 A max); 225 A NQ interiors 30-84 A	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00002	**NQMB2Q14**	NQ14 main circuit breaker adapter kit, Q-frame, 225 A (14-inch-wide interiors)	QB, QD, QG, QJ **A**	current (listed in 2026 Digest)
EDH-SQD-00006	**NQMB4LA**	NQ main circuit breaker adapter kit, LA/LH, 400 A	LA/LH short-handle (e.g. LAL36400MB); NQ30L4/42L4/54L4/84L4 interiors **A**	current (listed in 2026 Digest)
EDH-SQD-00007	**NQMB6PPL**	NQ main / sub-feed circuit breaker kit, PowerPacT L-frame, 400/600 A	LG, LJ, LL **A**	current (listed in 2026 Digest)
EDH-SQD-00016	**NQSFB2HJ**	NQ sub-feed circuit breaker adapter kit, H/J-frame, 225 A mains	HD/HG/HJ/HL/HR, JD/JG/JJ/JL/JR (3-pole H for single-phase 110-150 A) **A**	current (listed in 2026 Digest)
EDH-SQD-00015	**NQSFB2Q**	NQ sub-feed circuit breaker adapter kit, Q-frame, 225 A mains	QB/QD/QG/QJ **A**	current (listed in 2026 Digest)
EDH-SQD-00018	**NQSFB4HJ**	NQ sub-feed circuit breaker adapter kit, H/J-frame, 400 A mains (single or dual)	H- and J-frame PowerPacT **A**	current (listed in 2026 Digest)
EDH-SQD-00017	**NQSFB4Q**	NQ sub-feed circuit breaker adapter kit, Q-frame, 400 A mains (single or dual)	QB/QD/QG/QJ **A**	current (listed in 2026 Digest)
EDH-SQD-00019	**NQSFB6PPL**	NQ sub-feed circuit breaker kit, PowerPacT L, 600 A mains	PowerPacT L (LG/LJ/LL) **A**	current (listed in 2026 Digest)

EDH-SQD-00003	NQMB2HJ	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ main circuit breaker adapter kit, H/J-frame, 225 A

OEM part number	NQMB2HJ	**A**	S27 oem_spec
Alternate / superseded numbers	NQMB2HJ14 (14-inch-wide version)	**A**	S37, S29 equivalent; oem_spec
Description	Main circuit breaker adapter kit (less breaker) for vertical PowerPacT H (150 A max) or J (250 A max, 225 A interiors) main breaker	**A**	S27, S37 p. 9-9; oem_spec
Application	main	**A**	S27 oem_spec
Installation location	Main lug end of NQ interior; breaker connected by hard bus connectors replacing main lugs	**A**	S37 oem_spec
Breaker compatibility	HD, HG, HJ, HL, HR, JD, JG, JJ, JL, JR; 3-pole breaker used for single-phase (e.g. HDL36100)	**A**	S27 p. 9-9 and footnotes; oem_spec
Current rating	100 A interiors (H) and 225 A interiors (H or J)	**A**	S27 p. 9-9; oem_spec
Kit contents	Deadfront cover, mounting pan, deadfront support brackets (2), 10-32x7/16 (2), 10-32x5/16 (6), 8-32x3-1/4 (2), 1/4-20x7/8 (3), terminal kit S37444 (H) and S37445 (J), hard-bus breaker connectors (3), MAIN label	**A**	S37 Kit Contents; oem_spec
Fasteners	Hard-bus connectors bolt to panel bus with 3x 1/4-20x7/8 tapping screws; to breaker via terminal-kit screws; 'X' mark on connector = top surface; B-phase connector omitted for 1-phase	**A**	S37 oem_spec
Torque values	Connector-to-panel-bus screws 25-30 lb-in (2.8-3.4 N-m); breaker side per terminal kit instructions	**A**	same as above
OEM instruction document	80043-725-02 Rev. 01 (09/2015)	**A**	same as above
Status	current (listed in 2026 Digest)	**A**	S27 p. 9-9; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Requires	NQHJQLLC (EDH-SQD-00046), S37444 (EDH-SQD-00121), S37445 (EDH-SQD-00122)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00004	NQMB2HJ14	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ14 main circuit breaker adapter kit, H/J-frame (14-inch-wide interiors)

OEM part number	NQMB2HJ14	A	S29 oem_spec
Description	H/J-frame main breaker adapter kit for NQ 14-inch interiors	A	S29 NQ main breaker notes; oem_spec
Application	main	A	S29 oem_spec
Breaker compatibility	HD, HG, HJ, HL, HR, JD, JG, JJ, JL	A	S27 p. 9-11; oem_spec
Kit contents	As NQMB2HJ but with NQMB2HJ14-specific deadfront support brackets	A	S37 oem_spec
OEM instruction document	80043-725-02	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-11; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Digest p. 9-11 prints 'NQMB2HJ14' split across lines as 'NQMB2H-J14' - confirm exact catalog string*		

EDH-SQD-00005	NQMB2KI	Square D	main-breaker-kit	NOT IN 2026 DIGEST; PR

NQ main circuit breaker adapter kit, KI-frame, 225 A (legacy)

OEM part number	NQMB2KI	A	S38 oem_spec
Description	KI-frame main circuit breaker (225 A max) adapter kit for NQ panelboard	A	S38 p. 1; oem_spec
Application	main	A	S38 oem_spec
Current rating	225 A max	A	same as above
Kit contents	Deadfront cover, mounting pan, deadfront support brackets, 10-32x7/16 (2), 10-32x5/16 (6), 10-32x3-1/4 (4), lug wires, label (Lettered items A-D partially garbled in extraction)	B	same as above
Torque values	Panel main lug wire binding screws 275 lb-in (31 N-m)	A	same as above
OEM instruction document	80043-726-01 (01/2008)	A	same as above
Status	not in 2026 Digest; presumed discontinued	C	S27 inference
Replacement / successor	NQMB2Q or NQMB2HJ with PowerPacT Q/H/J breaker	D	inference
Cross-links	Families: NQ · Breakers: KI / KC frame (legacy)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00001	NQMB2Q	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ main circuit breaker adapter kit, Q-frame, 225 A

OEM part number	NQMB2Q	A	S27 oem_spec
Alternate / superseded numbers	NQMB2Q14 (14-inch-wide NQ version; differs in deadfront support brackets)	A	S35 equivalent; oem_spec
Description	Main circuit breaker adapter kit (less breaker) converting 225 A NQ main-lug interior to vertical Q-frame main breaker	A	S27, S35 p. 9-9; oem_spec
Application	main	A	S27 oem_spec
Installation location	Main lug end of NQ interior; breaker connected to interior main lugs by short lug wires (not hard bus)	A	S35 oem_spec
Breaker compatibility	PowerPacT Q-frame QB, QD, QG, QJ (225 A max); 225 A NQ interiors 30-84 ckt	A	S27, S35 p. 9-9; oem_spec
Current rating	15-225 A (100-225 A per distributor)	A	S27 p. 9-9; oem_spec
Kit contents	Main breaker deadfront cover (1), mounting pan with insulator (1), deadfront support brackets (2), 10-32x7/16 tapping screws (2), 10-32x5/16 (6), 8-32x2-1/4 (2), 8-32x3-1/4 (2), main lug wires (4), MAIN label (Distributor (Crescent) describes: mounting pan, deadfront cover, support brackets, installation hardware; QBL/QDL/QGL/QJL 100-225 A)	A	S35, S93 p. 1; oem_spec

Fasteners	Pan to interior: 4x 10-32x5/16; breaker to pan: 8-32x3-1/4 and 8-32x2-1/4 (discard breaker-supplied screws); breaker mounted in holes marked B (bottom feed) or T (top feed), ON end toward top	A	S35 pp. 3-4; oem_spec
Torque values	Panel main lug wire binding screws 275 lb-in (31 N-m); breaker lugs per breaker label	A	S35 p. 5; oem_spec
OEM instruction document	80043-722-02	A	S35 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-9; oem_spec
Identification features	Pan carries B/T hole marks; connection by 4 cable 'main lug wires' rather than bus straps	A	S35 p. 4; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ)		
Requires	NQHJQLLC (EDH-SQD-00046)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Lug wire size/length not stated*		

EDH-SQD-00002	NQMB2Q14	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ14 main circuit breaker adapter kit, Q-frame, 225 A (14-inch-wide interiors)

OEM part number	NQMB2Q14	A	S27 oem_spec
Description	Q-frame main breaker adapter kit for NQ 14-inch-wide 225 A interiors (NQ30L2C14, NQ42L2C14, NQ430L2C14, NQ442L2C14)	A	S27, S29 p. 9-11; oem_spec
Application	main	A	S27 oem_spec
Breaker compatibility	QB, QD, QG, QJ	A	S27 p. 9-11; oem_spec
Kit contents	As NQMB2Q but with NQMB2Q14-specific deadfront support brackets (mounted pointing inward)	A	S35 p. 1, 3; oem_spec
Torque values	Panel main lug binding screws 275 lb-in (31 N-m)	A	S35 oem_spec
OEM instruction document	80043-722-02	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-11; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00006	NQMB4LA	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ main circuit breaker adapter kit, LA/LH, 400 A

OEM part number	NQMB4LA	A	S27 oem_spec
Description	LA/LH main circuit breaker (400 A max) adapter kit for 400 A NQ interiors	A	S27, S39 p. 9-9; oem_spec
Application	main	A	S27 oem_spec
Breaker compatibility	LA/LH short-handle (e.g. LAL36400MB); NQ30L4/42L4/54L4/84L4 interiors	A	S27 p. 9-9; oem_spec
Current rating	125-400 A	A	same as above
Kit contents	Deadfront cover, mounting pan, support brackets, 1/4-20x7/8 (6), 10-32x7/16 (2), 10-32x5/16 (6), 3/8-16x3/4 screws (3) + 3/8 washers, 12-24x3-1/4 (4), main breaker connectors (3), label	A	S39 oem_spec
Fasteners	Connectors to bus 6x 1/4-20x7/8; breaker slides onto connectors, 3x 3/8-16x3/4; breaker to pan 4x 12-24x3-1/4; breaker lugs removed and discarded	A	same as above
Torque values	Connector-to-bus 60-65 lb-in (6.8-7.3 N-m); breaker-to-connector 3/8-16 bolts 250-275 lb-in (28.2-31.0 N-m)	A	same as above
OEM instruction document	80043-727-02 (05/2010)	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-9; oem_spec
Cross-links	Families: NQ · Breakers: LA / LH (L-frame, legacy thermal-magnetic)		
Requires	NQLALLC (EDH-SQD-00045)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00007	NQMB6PPL	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ main / sub-feed circuit breaker kit, PowerPacT L-frame, 400/600 A

OEM part number	NQMB6PPL	A	S27 oem_spec
Description	400/600 A NQ main circuit breaker and 400 A sub-feed breaker kit for PowerPacT L	A	S75 oem_spec
Application	main or sub-feed	A	S27, S75 p. 9-9, 9-18; oem_spec
Installation location	Requires 8.75 in. deep MH..D9 boxes (MH62D9-MH92D9); elevating brackets removed for some boxes	A	S75, S27 oem_spec
Breaker compatibility	LG, LJ, LL	A	S27 p. 9-9; oem_spec
Kit contents	Label bag, L-frame screw bag (incl. deadfront support brackets), M10x25 screw bag, terminal shield bag, escutcheon, deadfront extension, deadfront cover, mounting pan, A/B/C phase connector assemblies	A	S75 Kit Contents p. 8; oem_spec
OEM instruction document	80043-847-01 (11/2021)	A	S75 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-9; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Requires	NQPPLLLC (EDH-SQD-00047)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00016	NQSFB2HJ	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ sub-feed circuit breaker adapter kit, H/J-frame, 225 A mains

OEM part number	NQSFB2HJ	A	S27 oem_spec
Description	NQ sub-feed circuit breaker adapter kit, H/J-frame, 225 A mains (breaker not included)	A	S27 p. 9-18; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	HD/HG/HJ/HL/HR, JD/JG/JJ/JL/JR (3-pole H for single-phase 110-150 A)	A	S27, S42 p. 9-18; oem_spec
Current rating	225 A interiors (one SFB)	A	S27 p. 9-18; oem_spec
Kit contents	As NQSFB2Q but main lug wires (6) and 8-32x3-1/4 screws only	A	S42 Kit Contents; oem_spec
Torque values	Bus screws 25-30 lb-in; panel lug wire binding screws 275 lb-in (31 N-m)	A	S42 oem_spec
OEM instruction document	80043-730-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00015	NQSFB2Q	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ sub-feed circuit breaker adapter kit, Q-frame, 225 A mains

OEM part number	NQSFB2Q	A	S27 oem_spec
Description	NQ sub-feed circuit breaker adapter kit, Q-frame, 225 A mains (breaker not included)	A	S27 p. 9-18; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	QB/QD/QG/QJ	A	S27, S42 p. 9-18; oem_spec
Current rating	225 A interiors (one SFB)	A	S27 p. 9-18; oem_spec
Kit contents	Neutral lug, load lugs (3), 10-32x5/16 (8), 10-32x7/16 (4), 1/4-20x9/16 (1), 1/4-20x7/8 (3), 8-32x2-1/4 and 8-32x3-1/4, SFB mounting pan, SFB deadfront cover, main lug wires (4), rail splice (1), deadfront support brackets (2)	A	S42 Kit Contents; oem_spec
Torque values	Bus screws 25-30 lb-in (2.8-3.4 N-m); panel lug wire binding screws 275 lb-in (31 N-m)	A	S42 oem_spec
OEM instruction document	80043-730-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00018	NQSFB4HJ	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ sub-feed circuit breaker adapter kit, H/J-frame, 400 A mains (single or dual)

OEM part number	NQSFB4HJ	A	S27 oem_spec
Description	NQ sub-feed circuit breaker adapter kit, H/J-frame, 400 A mains (single or dual) (breaker not included)	A	S27 p. 9-18; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	H- and J-frame PowerPacT	A	S27, S43 p. 9-18; oem_spec
Current rating	400 A interiors; one or two SFBs	A	S27 p. 9-18; oem_spec
Kit contents	As NQSFB4Q, H/J version of main lug wires (6)	A	S43 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m) bus screws	A	S43 oem_spec
OEM instruction document	80043-731-02	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00017	NQSFB4Q	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ sub-feed circuit breaker adapter kit, Q-frame, 400 A mains (single or dual)

OEM part number	NQSFB4Q	A	S27 oem_spec
Description	NQ sub-feed circuit breaker adapter kit, Q-frame, 400 A mains (single or dual) (breaker not included)	A	S27 p. 9-18; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	QB/QD/QG/QJ	A	S27, S43 p. 9-18; oem_spec
Current rating	400 A interiors; one or two SFBs (225 A max each)	A	S27 p. 9-18; oem_spec
Kit contents	Neutral lug, load lugs (3), 10-32x5/16 (8), 10-32x7/16 (4), 1/4-20x11/16 (2), 1/4-20x7/8 (6), 8-32x2-1/4, 8-32x3-1/4 (4), 12-24x1/2 (2), mounting pan, deadfront cover, main lug wires (6), rail splice, support brackets (2), branch neutral lug + insulator, closing plate, lug barriers (2), rivets (2), wiring/torque diagram	A	S43 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m) bus screws; 40-45 lb-in (4.5-5.1 N-m) per bulletin step	A	S43 oem_spec
OEM instruction document	80043-731-02	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00019	NQSFB6PPL	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ sub-feed circuit breaker kit, PowerPacT L, 600 A mains

OEM part number	NQSFB6PPL	A	S27 oem_spec
Description	NQ sub-feed circuit breaker kit, PowerPacT L, 600 A mains (breaker not included)	A	S27 p. 9-18; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	PowerPacT L (LG/LJ/LL)	A	same as above
Current rating	600 A interiors (one SFB); PowerPacT L requires 8.75 in. deep enclosure	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00041	**NQALMA6**	NQ 600 A aluminum mechanical main lug kit	—	not in 2026 Digest lug table
EDH-SQD-00029	**NQALV1**	NQ optional main lug kit, aluminum compression (crimp), 100 A	—	current (listed in 2026 Digest)
EDH-SQD-00032	**NQALV2**	NQ optional main lug kit, aluminum compression (crimp), 225 A	—	current (listed in 2026 Digest)
EDH-SQD-00035	**NQALV4**	NQ optional main lug kit, aluminum compression (crimp), 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00038	**NQALV6**	NQ optional main lug kit, aluminum compression (crimp), 600 A	—	current (listed in 2026 Digest)
EDH-SQD-00030	**NQCUM1**	NQ optional main lug kit, copper mechanical, 100 A	—	current (listed in 2026 Digest)
EDH-SQD-00033	**NQCUM2**	NQ optional main lug kit, copper mechanical, 225 A	—	current (listed in 2026 Digest)
EDH-SQD-00036	**NQCUM4**	NQ optional main lug kit, copper mechanical, 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00039	**NQCUM6**	NQ optional main lug kit, copper mechanical, 600 A	—	current (listed in 2026 Digest)
EDH-SQD-00031	**NQCUV1**	NQ optional main lug kit, copper compression (crimp), 100 A	—	current (listed in 2026 Digest)
EDH-SQD-00034	**NQCUV2**	NQ optional main lug kit, copper compression (crimp), 225 A	—	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00037	**NQCUV4**	NQ optional main lug kit, copper compression (crimp), 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00040	**NQCUV6**	NQ optional main lug kit, copper compression (crimp), 600 A	—	current (listed in 2026 Digest)

EDH-SQD-00041 NQALMA6 Square D main-lug-kit NOT IN 2026 DIGEST LUG

NQ 600 A aluminum mechanical main lug kit

OEM part number	NQALMA6	A	S36 oem_spec
Description	600 A main mechanical lug kit (covered with NQCUM6 in mechanical lug bulletin)	A	same as above
Kit contents	Main mechanical lugs (3), 1/4-20x7/8 (6), 1/4-20x11/16 (4)	A	S36 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S36 oem_spec
OEM instruction document	80043-724-01	A	same as above
Status	not in 2026 Digest lug table	C	S27 inference
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00029 NQALV1 Square D main-lug-kit CURRENT (LISTED IN 202

NQ optional main lug kit, aluminum compression (crimp), 100 A

OEM part number	NQALV1	A	S27 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 100 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S27, S45 p. 9-18; oem_spec
Application	main	A	S27 oem_spec
Current rating	100 A	A	S27 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S45 Kit Contents; oem_spec
Dimensions	Lug wire range: one #8-1/0 (AWG-kcmil)	A	S27 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S45 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00032	NQALV2	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, aluminum compression (crimp), 225 A

OEM part number	NQALV2	A	S27 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 225 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S27, S45 p. 9-18; oem_spec
Application	main	A	S27 oem_spec
Current rating	225 A	A	S27 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S45 Kit Contents; oem_spec
Dimensions	Lug wire range: one #4-300 (AWG-kcmil)	A	S27 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S45 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00035	NQALV4	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, aluminum compression (crimp), 400 A

OEM part number	NQALV4	A	S27 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 400 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S27, S45 p. 9-18; oem_spec
Application	main	A	S27 oem_spec
Current rating	400 A	A	S27 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S45 Kit Contents; oem_spec
Dimensions	Lug wire range: two 2/0-500 (AWG-kcmil)	A	S27 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S45 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00038	NQALV6	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, aluminum compression (crimp), 600 A

OEM part number	NQALV6	A	S27 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 600 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S27, S45 p. 9-18; oem_spec
Application	main	A	S27 oem_spec
Current rating	600 A	A	S27 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S45 Kit Contents; oem_spec
Dimensions	Lug wire range: two 2/0-500 (AWG-kcmil)	A	S27 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S45 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00030	NQCUM1	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper mechanical, 100 A

OEM part number	NQCUM1	A	S27 oem_spec
Description	Optional copper mechanical main lug kit for 100 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S27, S36 p. 9-18; oem_spec
Application	main	A	S27 oem_spec
Current rating	100 A	A	S27 p. 9-18; oem_spec
Kit contents	Main mechanical lugs (3), neutral mechanical lug(s) (400 A: 1, 600 A: 2), 1/4-20 tapping screws	A	S36 Kit Contents; oem_spec
Dimensions	Lug wire range: one #6-2/0 (AWG-kcmil)	A	S27 p. 9-18; oem_spec
Torque values	Lugs to bus with 1/4-20x7/8 tapping screws: 100/225 A 25-30 lb-in (2.8-3.4 N-m); 400/600 A 60-65 lb-in (6.8-7.3 N-m)	A	S36 oem_spec
OEM instruction document	80043-724-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00033	NQCUM2	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper mechanical, 225 A

OEM part number	NQCUM2	A	S27 oem_spec
Description	Optional copper mechanical main lug kit for 225 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S27, S36 p. 9-18; oem_spec
Application	main	A	S27 oem_spec
Current rating	225 A	A	S27 p. 9-18; oem_spec
Kit contents	Main mechanical lugs (3), neutral mechanical lug(s) (400 A: 1, 600 A: 2), 1/4-20 tapping screws	A	S36 Kit Contents; oem_spec
Dimensions	Lug wire range: one #6-250 (AWG-kcmil)	A	S27 p. 9-18; oem_spec
Torque values	Lugs to bus with 1/4-20x7/8 tapping screws: 100/225 A 25-30 lb-in (2.8-3.4 N-m); 400/600 A 60-65 lb-in (6.8-7.3 N-m)	A	S36 oem_spec
OEM instruction document	80043-724-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00036	NQCUM4	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper mechanical, 400 A

OEM part number	NQCUM4	A	S27 oem_spec
Description	Optional copper mechanical main lug kit for 400 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S27, S36 p. 9-18; oem_spec
Application	main	A	S27 oem_spec
Current rating	400 A	A	S27 p. 9-18; oem_spec
Kit contents	Main mechanical lugs (3), neutral mechanical lug(s) (400 A: 1, 600 A: 2), 1/4-20 tapping screws	A	S36 Kit Contents; oem_spec
Dimensions	Lug wire range: one 1/0-750 or two 1/0-350 (AWG-kcmil)	A	S27 p. 9-18; oem_spec
Torque values	Lugs to bus with 1/4-20x7/8 tapping screws: 100/225 A 25-30 lb-in (2.8-3.4 N-m); 400/600 A 60-65 lb-in (6.8-7.3 N-m)	A	S36 oem_spec
OEM instruction document	80043-724-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00039	NQCUM6	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper mechanical, 600 A

OEM part number	NQCUM6	A	S27 oem_spec
Description	Optional copper mechanical main lug kit for 600 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S27, S36 p. 9-18; oem_spec
Application	main	A	S27 oem_spec
Current rating	600 A	A	S27 p. 9-18; oem_spec
Kit contents	Main mechanical lugs (3), neutral mechanical lug(s) (400 A: 1, 600 A: 2), 1/4-20 tapping screws	A	S36 Kit Contents; oem_spec
Dimensions	Lug wire range: (not printed) (AWG-kcmil)	A	S27 p. 9-18; oem_spec
Torque values	Lugs to bus with 1/4-20x7/8 tapping screws: 100/225 A 25-30 lb-in (2.8-3.4 N-m); 400/600 A 60-65 lb-in (6.8-7.3 N-m)	A	S36 oem_spec
OEM instruction document	80043-724-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00031	NQCUV1	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper compression (crimp), 100 A

OEM part number	NQCUV1	A	S27 oem_spec
Description	Optional copper compression (crimp) main lug kit for 100 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S27, S45 p. 9-18; oem_spec
Application	main	A	S27 oem_spec
Current rating	100 A	A	S27 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S45 Kit Contents; oem_spec
Dimensions	Lug wire range: one #6-1/0 (AWG-kcmil)	A	S27 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S45 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00034	NQCUV2	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper compression (crimp), 225 A

OEM part number	NQCUV2	A	S27 oem_spec
Description	Optional copper compression (crimp) main lug kit for 225 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S27, S45 p. 9-18; oem_spec
Application	main	A	S27 oem_spec
Current rating	225 A	A	S27 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S45 Kit Contents; oem_spec
Dimensions	Lug wire range: one 2/0-300 (AWG-kcmil)	A	S27 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S45 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00037	NQCUV4	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper compression (crimp), 400 A

OEM part number	NQCUV4	A	S27 oem_spec
Description	Optional copper compression (crimp) main lug kit for 400 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S27, S45 p. 9-18; oem_spec
Application	main	A	S27 oem_spec
Current rating	400 A	A	S27 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S45 Kit Contents; oem_spec
Dimensions	Lug wire range: one 400-700 (AWG-kcmil)	A	S27 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S45 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00040	NQCUV6	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper compression (crimp), 600 A

OEM part number	NQCUV6	A	S27 oem_spec
Description	Optional copper compression (crimp) main lug kit for 600 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S27, S45 p. 9-18; oem_spec
Application	main	A	S27 oem_spec
Current rating	600 A	A	S27 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S45 Kit Contents; oem_spec
Dimensions	Lug wire range: two 250-500 (AWG-kcmil)	A	S27 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S45 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00008	**NQSFL1**	NQ sub-feed lug kit, 100 A	—	current (listed in 2026 Digest)
EDH-SQD-00009	**NQSFL2**	NQ sub-feed lug kit, 225 A	—	current (listed in 2026 Digest)
EDH-SQD-00010	**NQSFL4**	NQ sub-feed lug kit, 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00056	**QOB2125SL**	2-pole QOB branch mounted sub-feed lug kit	—	current (listed in 2026 Digest)
EDH-SQD-00057	**QOB3125SL**	3-pole QOB branch mounted sub-feed lug kit	—	current (listed in 2026 Digest)

EDH-SQD-00008	NQSFL1	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

NQ sub-feed lug kit, 100 A

OEM part number	NQSFL1	A	S27 oem_spec
Description	NQ sub-feed lug kit, 100 A	A	S27, S41 p. 9-18; oem_spec
Application	sub-feed	A	S27 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S41 oem_drawing
Current rating	100 A	A	S27 p. 9-18; oem_spec
Kit contents	Neutral lug (1), 100 A line lugs (3), 1/4-20x9/16 (1), 1/4-20x7/8 (6)	A	S41 Kit Contents; oem_spec
Dimensions	Wire range per phase one #6-2/0 Al/Cu in and out	A	S27 p. 9-16/9-18; oem_spec
Torque values	25-30 lb-in (2.8-3.4 N-m)	A	S41 oem_spec
OEM instruction document	80043-729-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00009	NQSFL2	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

NQ sub-feed lug kit, 225 A

OEM part number	NQSFL2	A	S27 oem_spec
Description	NQ sub-feed lug kit, 225 A	A	S27, S41 p. 9-18; oem_spec
Application	sub-feed	A	S27 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S41 oem_drawing
Current rating	225 A	A	S27 p. 9-18; oem_spec
Kit contents	Neutral lug (1), 225 A line lugs (3), 10-32x5/16, 1/4-20x9/16 (1), 1/4-20x7/8 (6), rail extensions (2), rail splices (2), main lug cover (1), lug barriers (2)	A	S41 Kit Contents; oem_spec
Dimensions	Wire range per phase one 1/0-350 kcmil Al/Cu	A	S27 p. 9-16/9-18; oem_spec
Torque values	25-30 lb-in (2.8-3.4 N-m)	A	S41 oem_spec
OEM instruction document	80043-729-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00010	NQSFL4	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

NQ sub-feed lug kit, 400 A

OEM part number	NQSFL4	A	S27 oem_spec
Alternate / superseded numbers	NQSFL4L (Liebert-specific 400 A sub-feed lug kit for Liebert NQ panelboard (80043-792-01, 03/2012))	A	S70 equivalent; oem_spec
Description	NQ sub-feed lug kit, 400 A	A	S27, S49 p. 9-18; oem_spec
Application	sub-feed	A	S27 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S49 oem_drawing
Current rating	400 A	A	S27 p. 9-18; oem_spec
Kit contents	Neutral lug (1), line lugs (3), 1/4-20x11/16 (2), 1/4-20x7/8 (6), lug barrier (1)	A	S49 Kit Contents; oem_spec
Dimensions	Wire range per phase one 1/0-750 kcmil Cu only	A	S27 p. 9-16/9-18; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S49 oem_spec
OEM instruction document	80043-745-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00056	QOB2125SL	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

2-pole QOB branch mounted sub-feed lug kit

OEM part number	QOB2125SL	A	S27 oem_spec
Description	2-pole QOB branch mounted sub-feed lug kit (bolt-on, occupies branch spaces)	A	S27 p. 9-19; oem_spec
Application	sub-feed	A	S27 oem_spec
Current rating	125 A (from catalog number; not stated)	C	S27 inference
Status	current (listed in 2026 Digest)	A	S27 p. 9-19; oem_spec
Cross-links	Families: NQ · Breakers: QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00057	QOB3125SL	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

3-pole QOB branch mounted sub-feed lug kit

OEM part number	QOB3125SL	A	S27 oem_spec
Description	3-pole QOB branch mounted sub-feed lug kit (bolt-on, occupies branch spaces)	A	S27 p. 9-19; oem_spec
Application	sub-feed	A	S27 oem_spec
Current rating	125 A (from catalog number; not stated)	C	S27 inference
Status	current (listed in 2026 Digest)	A	S27 p. 9-19; oem_spec
Cross-links	Families: NQ · Breakers: QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Through Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00012	**NQFTL2H**	NQ feed-through lug kit, 225 A, high circuit count (54/72/84)	54, 72, 84 circuit 225 A interiors ('H' = high count) A	current (listed in 2026 Digest)
EDH-SQD-00011	**NQFTL2L**	NQ feed-through lug kit, 225 A, low circuit count (30/42)	30 and 42 circuit 225 A interiors ('L' = low count) A	current (listed in 2026 Digest)
EDH-SQD-00014	**NQFTL4H**	NQ feed-through lug kit, 400 A, high circuit count	54/72/84 circuit 400 A interiors A	current (listed in 2026 Digest)
EDH-SQD-00013	**NQFTL4L**	NQ feed-through lug kit, 400 A, low circuit count	30/42 circuit 400 A interiors A	current (listed in 2026 Digest)

EDH-SQD-00012	NQFTL2H	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NQ feed-through lug kit, 225 A, high circuit count (54/72/84)

OEM part number	NQFTL2H	A	S27 oem_spec
Description	NQ feed-through lug kit, 225 A, high circuit count (54/72/84)	A	S27, S40 p. 9-18; oem_spec
Application	through-feed	A	S27 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S40 oem_drawing
Breaker compatibility	54, 72, 84 circuit 225 A interiors ('H' = high count)	A	S27 p. 9-18 fn 5; oem_spec
Current rating	225 A	A	S27 p. 9-18; oem_spec
Kit contents	As NQFTL2L plus short cover extension (1)	A	S40 Kit Contents; oem_spec
Dimensions	Wire range per phase one #6-350 Al/Cu	A	S27 p. 9-16/9-18; oem_spec
Torque values	25-30 lb-in (2.8-3.4 N-m)	A	S40 oem_spec
OEM instruction document	80043-728-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00011	NQFTL2L	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NQ feed-through lug kit, 225 A, low circuit count (30/42)

OEM part number	NQFTL2L	A	S27 oem_spec
Description	NQ feed-through lug kit, 225 A, low circuit count (30/42)	A	S27, S40 p. 9-18; oem_spec
Application	through-feed	A	S27 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S40 oem_drawing
Breaker compatibility	30 and 42 circuit 225 A interiors ('L' = low count)	A	S27 p. 9-18 fn 3; oem_spec
Current rating	225 A	A	S27 p. 9-18; oem_spec
Kit contents	Neutral lug (1), feed-through lugs (3), 10-32x5/16 (8), 1/4-20x9/16 (1), 1/4-20x7/8 (3), rail extensions (2), rail splices (2), long cover extension (1)	A	S40 Kit Contents; oem_spec
Dimensions	Wire range per phase one #6-350 Al/Cu	A	S27 p. 9-16/9-18; oem_spec
Torque values	25-30 lb-in (2.8-3.4 N-m)	A	S40 oem_spec
OEM instruction document	80043-728-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00014	NQFTL4H	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NQ feed-through lug kit, 400 A, high circuit count

OEM part number	NQFTL4H	A	S27 oem_spec
Description	NQ feed-through lug kit, 400 A, high circuit count	A	S27, S50 p. 9-18; oem_spec
Application	through-feed	A	S27 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S50 oem_drawing
Breaker compatibility	54/72/84 circuit 400 A interiors	A	S27 p. 9-18; oem_spec
Current rating	400 A	A	same as above
Kit contents	Same item list as NQFTL4L	A	S50 Kit Contents; oem_spec
Dimensions	Wire range per phase one 1/0-750 or two 1/0-350 Al/Cu	A	S27 p. 9-16/9-18; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S50 oem_spec
OEM instruction document	80043-746-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00013	NQFTL4L	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NQ feed-through lug kit, 400 A, low circuit count

OEM part number	NQFTL4L	A	S27 oem_spec
Description	NQ feed-through lug kit, 400 A, low circuit count	A	S27, S50 p. 9-18; oem_spec
Application	through-feed	A	S27 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S50 oem_drawing
Breaker compatibility	30/42 circuit 400 A interiors	A	S27 p. 9-18; oem_spec
Current rating	400 A	A	same as above
Kit contents	Neutral lug (1), feed-through lugs (3), 10-32x5/16 (8), 1/4-20x11/16 (2), 1/4-20x7/8 (6), lug barriers (2), rail extensions (2), rail splices (2), cover extension (1)	A	S50 Kit Contents; oem_spec
Dimensions	Wire range per phase one 1/0-750 or two 1/0-350 Al/Cu	A	S27 p. 9-16/9-18; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S50 oem_spec
OEM instruction document	80043-746-01	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00028	**NQALMN6**	NQ 600 A neutral lug kit (aluminum mechanical)	—	current (listed in 2026 Digest)

EDH-SQD-00028	NQALMN6	Square D	lug-kit	CURRENT (LISTED IN 202

NQ 600 A neutral lug kit (aluminum mechanical)

OEM part number	NQALMN6	A	S27 oem_spec
Alternate / superseded numbers	NQCUMN6 (Copper version (inferred from suffix))	A	S27 equivalent; p. 9-16; oem_spec
Description	600 A neutral used with NQALMN6 or NQCUMN6 to obtain (6) 1/0-750 kcmil or (4) 1/0-300 + (4) 1/0-750 kcmil neutral terminations, space factor 12	A	same as above
Current rating	600 A	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Exact content and material of NQALMN6 vs NQCUMN6 not stated*		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00058	**NQ100AN**	NQ Add-on neutral/ground lug	—	current (listed in 2026 Digest)
EDH-SQD-00060	**NQ200AN**	NQ Add-on neutral terminal kit for 175-200 A QO(VH) breakers	One NQ200AN per two 175-200 A QO(VH) breakers; not allowed in 100 A NQ A	current (listed in 2026 Digest)
EDH-SQD-00059	**Q1150AN**	NQ Add-on neutral/ground lug	—	current (listed in 2026 Digest)
EDH-SQD-00061	**QO70AN**	NQ Add-on neutral lug for 70 A QO(B)	—	current (listed in 2026 Digest)

EDH-SQD-00058	NQ100AN	Square D	lug	CURRENT (LISTED IN 202

NQ Add-on neutral/ground lug

OEM part number	NQ100AN	A	S27 oem_spec
Description	Add-on neutral/ground lug for NQ neutral bar; wire #14-2/0 Al or Cu	A	S27 p. 9-18/9-19; oem_spec
Installation location	Branch neutral bar; consumes standard neutral terminations (see Digest add-on table)	A	S27 p. 9-18; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-19; oem_spec
Cross-links	Families: NQ · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00060	NQ200AN	Square D	lug	CURRENT (LISTED IN 202

NQ Add-on neutral terminal kit for 175-200 A QO(VH) breakers

OEM part number	NQ200AN	A	S27 oem_spec
Description	Add-on neutral terminal kit for 175-200 A QO(VH) breakers for NQ neutral bar; wire (2) #4-300 kcmil Al or Cu	A	S27 p. 9-18/9-19; oem_spec
Installation location	Branch neutral bar; consumes standard neutral terminations (see Digest add-on table)	A	S27 p. 9-18; oem_spec
Breaker compatibility	One NQ200AN per two 175-200 A QO(VH) breakers; not allowed in 100 A NQ	A	S27 p. 9-18 fn; oem_spec
Torque values	40-45 lb-in (4.5-5.1 N-m) mounting	A	S78 oem_spec
OEM instruction document	80043-858-01 (08/2020)	A	same as above
Status	current (listed in 2026 Digest)	A	S27 p. 9-19; oem_spec
Cross-links	Families: NQ · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00059	Q1150AN	Square D	lug	CURRENT (LISTED IN 202

NQ Add-on neutral/ground lug

OEM part number	Q1150AN	A	S27 oem_spec
Description	Add-on neutral/ground lug for NQ neutral bar; wire #1-4/0 Al or Cu	A	S27 p. 9-18/9-19; oem_spec
Installation location	Branch neutral bar; consumes standard neutral terminations (see Digest add-on table)	A	S27 p. 9-18; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-19; oem_spec
Cross-links	Families: NQ · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00061	QO70AN	Square D	lug	CURRENT (LISTED IN 202

NQ Add-on neutral lug for 70 A QO(B)

OEM part number	QO70AN	A	S27 oem_spec
Description	Add-on neutral lug for 70 A QO(B) for NQ neutral bar; wire #10-#2 Al or #14-#4 Cu	A	S27 p. 9-18/9-19; oem_spec
Installation location	Branch neutral bar; consumes standard neutral terminations (see Digest add-on table)	A	S27 p. 9-18; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-19; oem_spec
Cross-links	Families: NQ, NF · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00042	**SKNQBC**	NQ branch connector replacement kit	—	listed by distributors; not in Digest tables

EDH-SQD-00042	SKNQBC	Square D	branch-connector-kit	LISTED BY DISTRIBUTORS

NQ branch connector replacement kit

OEM part number	SKNQBC	A	S47 oem_spec
Description	Replacement branch connectors (bus 'fingers' that QO plug-on jaws and QOB bolt-on terminals attach to) for NQ interiors	A	S47 p. 1; oem_spec
Application	branch	A	S47 oem_spec
Installation location	On NQ phase bus under snap-on bus cover in the rail	A	S47 steps 3-4; oem_spec
Kit contents	'A' and 'C' phase branch connectors (2), 'B' phase branch connector (1), 10-32 x 11/16 tapping screws (3)	A	S47 Kit Contents p. 1; oem_spec
Fasteners	10-32 x 11/16 tapping screw per connector, T20 Torx; installed in same orientation as removed; centre (B) connector omitted on single-phase	A	S47 p. 3; oem_spec
Torque values	100/225 A interiors: Al 18-22 lb-in (2.02-2.47 N-m), Cu 25-30 lb-in (2.81-3.38 N-m); 400/600 A: Al 25-30 lb-in, Cu 35-45 lb-in (3.95-5.08 N-m); QOB mounting screws 18-21 lb-in (2.03-2.37 N-m)	A	S47 Table 1; oem_spec
OEM instruction document	80043-735-01 (02/2008)	A	S47 oem_spec
Status	listed by distributors; not in Digest tables	C	inference
Cross-links	Families: NQ · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Same connector for Al and Cu bus? Torque table differs by bus material only*		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00024	**NQN1CU**	NQ copper 100% neutral kit, 100 A	—	current (listed in 2026 Digest)
EDH-SQD-00025	**NQN2CU**	NQ copper 100% neutral kit, 225 A	—	current (listed in 2026 Digest)
EDH-SQD-00027	**NQN6CRUS**	NQ condo riser 100% neutral assembly, 400/600 A	—	current (listed in 2026 Digest)
EDH-SQD-00026	**NQN6CU**	NQ copper 100% neutral kit, 400 A	Listed for 400 A mains A	current (listed in 2026 Digest)
EDH-SQD-00020	**NQNL1**	NQ 200% neutral kit, 100 A	200% neutral; not for use with SFL/FTL/SFB in 400 A (see NQNL4) A	current (listed in 2026 Digest)
EDH-SQD-00021	**NQNL2**	NQ 200% neutral kit, 225 A	225 A panels without SFL/FTL/SFB A	current (listed in 2026 Digest)
EDH-SQD-00022	**NQNL2ACCY**	NQ 200% neutral kit, 225 A, for panels with SFL/FTL/SFB	For 225 A panel with sub-feed lugs, feed-through lugs or sub-feed brea A	current (listed in 2026 Digest)
EDH-SQD-00023	**NQNL4**	NQ 200% neutral kit, 400 A	Not to be used with SFL, FTL or SFB (those combinations factory assemb A	current (listed in 2026 Digest)

EDH-SQD-00024	NQN1CU	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ copper 100% neutral kit, 100 A

OEM part number	NQN1CU	A	S27 oem_spec
Description	NQ copper 100% neutral kit, 100 A	A	S27, S46 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S27 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S46 inference
Current rating	100 A	A	S27 p. 9-16, 9-18; oem_spec
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S46 Kit Contents; oem_spec
OEM instruction document	80043-734-01	A	S46 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00025	NQN2CU	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ copper 100% neutral kit, 225 A

OEM part number	NQN2CU	A	S27 oem_spec
Description	NQ copper 100% neutral kit, 225 A	A	S27, S46 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S27 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S46 inference
Current rating	225 A	A	S27 p. 9-16, 9-18; oem_spec
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S46 Kit Contents; oem_spec
OEM instruction document	80043-734-01	A	S46 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00027	NQN6CRUS	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ condo riser 100% neutral assembly, 400/600 A

OEM part number	NQN6CRUS	A	S27 oem_spec
Alternate / superseded numbers	NQNL6CRUS (200% neutral version)	A	S27 equivalent; p. 9-16; oem_spec
	NQN6CR / NQNL6CR (Designations used in 2009 bulletin 80043-778-01 (non-US-suffixed))	A	S68 alias; oem_spec
Description	Condo riser neutral assembly (100%) for 400/600 A NQ, max 42 branch circuits; requires 26 in. wide enclosure; space factor 12 in.	A	S27 p. 9-16; oem_spec
Current rating	400/600 A	A	same as above
OEM instruction document	80043-778-01 (01/2009); bonding strap NFNQCRBOND46 per 80043-853-01	A	S68, S77 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-16; oem_spec
Cross-links	Families: NQ		
Requires	NFNQCRBOND46 (EDH-SQD-00114)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00026	NQN6CU	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ copper 100% neutral kit, 400 A

OEM part number	NQN6CU	A	S27 oem_spec
Description	NQ copper 100% neutral kit, 400 A	A	S27, S46 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S27 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S46 inference
Breaker compatibility	Listed for 400 A mains	A	S27 p. 9-16, 9-18; oem_spec
Current rating	400 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S46 Kit Contents; oem_spec
OEM instruction document	80043-734-01	A	S46 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00020	NQNL1	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ 200% neutral kit, 100 A

OEM part number	NQNL1	A	S27 oem_spec
Description	NQ 200% neutral kit, 100 A	A	S27, S46 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S27 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S46 inference
Breaker compatibility	200% neutral; not for use with SFL/FTL/SFB in 400 A (see NQNL4)	A	S27 p. 9-16, 9-18; oem_spec
Current rating	100 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S46 Kit Contents; oem_spec
Dimensions	space factor 0	A	S27 p. 9-18; oem_spec
OEM instruction document	80043-734-01	A	S46 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00021	NQNL2	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ 200% neutral kit, 225 A

OEM part number	NQNL2	A	S27 oem_spec
Description	NQ 200% neutral kit, 225 A	A	S27, S46 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S27 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S46 inference
Breaker compatibility	225 A panels without SFL/FTL/SFB	A	S27 p. 9-16, 9-18; oem_spec
Current rating	225 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S46 Kit Contents; oem_spec
Dimensions	space factor 0	A	S27 p. 9-18; oem_spec
OEM instruction document	80043-734-01	A	S46 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00022	NQNL2ACCY	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ 200% neutral kit, 225 A, for panels with SFL/FTL/SFB

OEM part number	NQNL2ACCY	A	S27 oem_spec
Description	NQ 200% neutral kit, 225 A, for panels with SFL/FTL/SFB	A	S27, S46 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S27 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S46 inference
Breaker compatibility	For 225 A panel with sub-feed lugs, feed-through lugs or sub-feed breaker; requires 6 in. trim and rail extension for wire bending space	A	S27 p. 9-16, 9-18; oem_spec
Current rating	225 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S46 Kit Contents; oem_spec
Dimensions	space factor 6 in.	A	S27 p. 9-18; oem_spec
OEM instruction document	80043-734-01	A	S46 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00023	NQNL4	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ 200% neutral kit, 400 A

OEM part number	NQNL4	A	S27 oem_spec
Description	NQ 200% neutral kit, 400 A	A	S27, S46 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S27 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S46 inference
Breaker compatibility	Not to be used with SFL, FTL or SFB (those combinations factory assembled only)	A	S27 p. 9-16, 9-18; oem_spec
Current rating	400 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S46 Kit Contents; oem_spec
Dimensions	space factor 0	A	S27 p. 9-18; oem_spec
OEM instruction document	80043-734-01	A	S46 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00127	**PK12GTA**	Aluminum equipment ground bar kit (12 terminations, inferred from number)	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu A	current (listed in 2026 Digest)
EDH-SQD-00128	**PK18GTA**	Aluminum equipment ground bar kit (18 terminations, inferred from number)	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu A	current (listed in 2026 Digest)
EDH-SQD-00129	**PK23GTA**	Aluminum equipment ground bar kit (23 terminations, inferred from number)	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu A	current (listed in 2026 Digest)
EDH-SQD-00125	**PK23GTAL**	PK23GTA ground bar with #1-4/0 Al/Cu lug	—	current (listed in 2026 Digest)
EDH-SQD-00123	**PK27GTA**	Aluminum equipment ground bar kit, 27 terminations #14-#4 AWG (also #6-2/0 lug variant per NQ table)	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu A	current (listed in 2026 Digest)
EDH-SQD-00124	**PK27GTACU**	Copper equipment ground bar kit, 27 terminations #14-#4 Cu	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu A	current (listed in 2026 Digest)

EDH-SQD-00127	PK12GTA	Square D	ground-bar	CURRENT (LISTED IN 202

Aluminum equipment ground bar kit (12 terminations, inferred from number)

OEM part number	PK12GTA	A	S27 oem_spec
Description	Aluminum equipment ground bar kit (12 terminations, inferred from number) (termination count inferred from catalog number)	B	S27 p. 9-17, 9-35; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Breaker compatibility	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu); NQ 400/600 A: PK12GTA, PK27GTA, PK27GTACU. One kit supplied when ground bar specified, two when extra ground bar ordered	A	S27 p. 9-17; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-17, 9-35; oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00128	PK18GTA	Square D	ground-bar	CURRENT (LISTED IN 202

Aluminum equipment ground bar kit (18 terminations, inferred from number)

OEM part number	PK18GTA	A	S27 oem_spec
Description	Aluminum equipment ground bar kit (18 terminations, inferred from number) (termination count inferred from catalog number)	B	S27 p. 9-17; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Breaker compatibility	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu); NQ 400/600 A: PK12GTA, PK27GTA, PK27GTACU. One kit supplied when ground bar specified, two when extra ground bar ordered	A	S27 p. 9-17; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00129	PK23GTA	Square D	ground-bar	CURRENT (LISTED IN 202

Aluminum equipment ground bar kit (23 terminations, inferred from number)

OEM part number	PK23GTA	A	S27, S463 oem_spec
Alternate / superseded numbers	PK-23GTA (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Equipment ground bar kit 31 thru 54 circuits, 225 A max mains - PK-23GTA $2.00	A	S463 Digest 152 (1970) p.84; oem_spec
	Aluminum equipment ground bar kit (23 terminations, inferred from number) (termination count inferred from catalog number)	B	S27 p. 9-17; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Breaker compatibility	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu); NQ 400/600 A: PK12GTA, PK27GTA, PK27GTACU. One kit supplied when ground bar specified, two when extra ground bar ordered	A	S27 p. 9-17; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQ, NQOB, NA1B, NH1B		
Not yet documented	Aftermarket / reproduction, current_status, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00125	PK23GTAL	Square D	ground-bar	CURRENT (LISTED IN 202

PK23GTA ground bar with #1-4/0 Al/Cu lug

OEM part number	PK23GTAL	A	S27 oem_spec
Description	PK23GTA ground bar with #1-4/0 Al/Cu lug	A	S27 p. 9-19, 9-39; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Status	current (listed in 2026 Digest)	A	S27 p. 9-19, 9-39; oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00123	PK27GTA	Square D	ground-bar	CURRENT (LISTED IN 202

Aluminum equipment ground bar kit, 27 terminations #14-#4 AWG (also #6-2/0 lug variant per NQ table)

OEM part number	PK27GTA	A	S27, S463 oem_spec
Alternate / superseded numbers	PK-27GTA (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Aluminum equipment ground bar kit, 27 terminations #14-#4 AWG (also #6-2/0 lug variant per NQ table)	A	S27 p. 9-17, 9-19, 9-39; oem_spec
	Equipment ground bar kit 1 thru 54 circuits, 600 A max mains - PK-27GTA $2.10	A	S463 Digest 152 (1970) p.84; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Breaker compatibility	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu); NQ 400/600 A: PK12GTA, PK27GTA, PK27GTACU. One kit supplied when ground bar specified, two when extra ground bar ordered	A	S27 p. 9-17; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-17, 9-19, 9-39; oem_spec
	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQ, NF, NQOB, NA1B, NH1B		
Not yet documented	Aftermarket / reproduction, current_status, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00124	PK27GTACU	Square D	ground-bar	CURRENT (LISTED IN 202

Copper equipment ground bar kit, 27 terminations #14-#4 Cu

OEM part number	PK27GTACU	A	S27 oem_spec
Description	Copper equipment ground bar kit, 27 terminations #14-#4 Cu	A	S27 p. 9-17, 9-19, 9-39; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Breaker compatibility	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu); NQ 400/600 A: PK12GTA, PK27GTA, PK27GTACU. One kit supplied when ground bar specified, two when extra ground bar ordered	A	S27 p. 9-17; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-17, 9-19, 9-39; oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Interior

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00922	**NQ30L1C14GS**	Square D NQ 14 in wide interior NQ30L1C14GS	—	unknown
EDH-SQD-00918	**NQ418L1C14**	Square D NQ 14 in wide interior NQ418L1C14	—	unknown
EDH-SQD-00919	**NQ430L1C14**	Square D NQ 14 in wide interior NQ430L1C14	—	unknown
EDH-SQD-00920	**NQ430L2C14**	Square D NQ 14 in wide interior NQ430L2C14	—	unknown
EDH-SQD-00921	**NQ442L2C14**	Square D NQ 14 in wide interior NQ442L2C14	—	unknown

EDH-SQD-00922	NQ30L1C14GS	Square D	interior	STATUS UNKNOWN

Square D NQ 14 in wide interior NQ30L1C14GS

OEM part number	NQ30L1C14GS	C	S625 distributor
Description	NQ interior 14 in W, 30 circuits, 100 A, 1-phase (distributor title 'NQ 14 30CKT 100A 1P') (distributor title via search extract)	C	same as above
Application	14 in wide NQ interior; Square D directs retrofit enclosures under 17 in wide to 'RTI 14"W NQ interiors' (custom trim). That these C14 catalog numbers are the RTI interiors is an inference from width only.	D	S625, S620 inference
Cross-links	Families: NQ, SQD-NQNF-RETRO		
Not yet documented	Kit contents, Material, Status		
Open question	*Is 'RTI' a distinct catalog suffix or simply the C14 (14 in) interiors?*		

EDH-SQD-00918	NQ418L1C14	Square D	interior	STATUS UNKNOWN

Square D NQ 14 in wide interior NQ418L1C14

OEM part number	NQ418L1C14	C	S625 distributor
Description	NQ interior 14 in W, 18 circuits, 100 A, 3-phase (distributor title 'NQ 14IN 18CKT 100A 3') (distributor title via search extract)	C	same as above
Application	14 in wide NQ interior; Square D directs retrofit enclosures under 17 in wide to 'RTI 14"W NQ interiors' (custom trim). That these C14 catalog numbers are the RTI interiors is an inference from width only.	D	S625, S620 inference
Cross-links	Families: NQ, SQD-NQNF-RETRO		
Not yet documented	Kit contents, Material, Status		
Open question	*Is 'RTI' a distinct catalog suffix or simply the C14 (14 in) interiors?*		

EDH-SQD-00919	NQ430L1C14	Square D	interior	STATUS UNKNOWN

Square D NQ 14 in wide interior NQ430L1C14

OEM part number	NQ430L1C14	C	S625 distributor
Description	NQ series panelboard interior 240 Vac/48 Vdc, 100 A, 30 spaces, 3-phase (distributor title via search extract)	C	same as above
Application	14 in wide NQ interior; Square D directs retrofit enclosures under 17 in wide to 'RTI 14"W NQ interiors' (custom trim). That these C14 catalog numbers are the RTI interiors is an inference from width only.	D	S625, S620 inference
Dimensions	32 in H x 14 in W x 5-3/4 in D (Steiner)	C	S625 distributor
Cross-links	Families: NQ, SQD-NQNF-RETRO		
Not yet documented	Kit contents, Material, Status		
Open question	*Is 'RTI' a distinct catalog suffix or simply the C14 (14 in) interiors?*		

EDH-SQD-00920	NQ430L2C14	Square D	interior	STATUS UNKNOWN

Square D NQ 14 in wide interior NQ430L2C14

OEM part number	NQ430L2C14	C	S625 distributor
Description	NQ 3-phase panelboard 240 Vac/48 Vdc, 225 A, 4-wire, copper, 14 in wide (distributor title via search extract)	C	same as above
Application	14 in wide NQ interior; Square D directs retrofit enclosures under 17 in wide to 'RTI 14"W NQ interiors' (custom trim). That these C14 catalog numbers are the RTI interiors is an inference from width only.	D	S625, S620 inference
Cross-links	Families: NQ, SQD-NQNF-RETRO		
Not yet documented	Kit contents, Material, Status		
Open question	*Is 'RTI' a distinct catalog suffix or simply the C14 (14 in) interiors?*		

EDH-SQD-00921	NQ442L2C14	Square D	interior	STATUS UNKNOWN

Square D NQ 14 in wide interior NQ442L2C14

OEM part number	NQ442L2C14	C	S625 distributor
Description	NQ interior 14 in W, 42 circuits, 225 A, 3-phase, copper; SCCR 65,000/100,000 A (distributor title via search extract)	C	same as above
Application	14 in wide NQ interior; Square D directs retrofit enclosures under 17 in wide to 'RTI 14"W NQ interiors' (custom trim). That these C14 catalog numbers are the RTI interiors is an inference from width only.	D	S625, S620 inference
Dimensions	14 in W x 5-3/4 in D x 38 in H (Standard Electric; Steiner width field 13.49 in)	C	S625 distributor
Cross-links	Families: NQ, SQD-NQNF-RETRO		
Not yet documented	Kit contents, Material, Status		
Open question	*Is 'RTI' a distinct catalog suffix or simply the C14 (14 in) interiors?*		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00055	**NQES18**	NQ equipment space kit (18 in.)	—	unknown

EDH-SQD-00055	NQES18	Square D	mounting-bracket	UNKNOWN

NQ equipment space kit (18 in.)

OEM part number	NQES18	A	S51 oem_spec
Description	Equipment space kit adding customer equipment space to NQ interior	A	same as above
Kit contents	Mounting pan (1), barrier (1), extension rails (2), rail splices (2), 10-32x5/16 (14)	A	same as above
OEM instruction document	80043-753-01 (03/2008)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Mounting Rail

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00051	**NQ12RDE**	NQ 12 in. trim/rail and deadfront extension kit	—	current (listed in 2026 Digest)
EDH-SQD-00052	**NQ18RDE**	NQ 18 in. trim/rail and deadfront extension kit	—	current (listed in 2026 Digest)
EDH-SQD-00053	**NQ24RDE**	NQ 24 in. trim/rail and deadfront extension kit	—	current (listed in 2026 Digest)
EDH-SQD-00049	**NQ3RDE**	NQ 3 in. trim/rail and deadfront extension kit	—	in 2012 bulletin; not in 2026 Digest list
EDH-SQD-00050	**NQ6RDE**	NQ 6 in. trim/rail and deadfront extension kit	—	current (listed in 2026 Digest)

EDH-SQD-00051	NQ12RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NQ 12 in. trim/rail and deadfront extension kit

OEM part number	NQ12RDE	A	S27 oem_spec
Description	12 in. rail and deadfront extension for NQ interiors (used with SFL/FTL/neutral accessories needing extra length)	A	S44, S27 p. 9-19; oem_spec
Kit contents	10-32x5/16 (10), 10-32x7/16 (2), deadfront support brackets (2), rail extensions (2), rail splices (2), 100/225 A main lug cover, 400/600 A main lug cover	A	S44 Kit Contents; oem_spec
OEM instruction document	80043-732-02 (01/2012)	A	S44 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-19; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00052	NQ18RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NQ 18 in. trim/rail and deadfront extension kit

OEM part number	NQ18RDE	A	S27 oem_spec
Description	18 in. rail and deadfront extension for NQ interiors (used with SFL/FTL/neutral accessories needing extra length)	A	S44, S27 p. 9-19; oem_spec
Kit contents	10-32x5/16 (10), 10-32x7/16 (2), deadfront support brackets (2), rail extensions (2), rail splices (2), 100/225 A main lug cover, 400/600 A main lug cover	A	S44 Kit Contents; oem_spec
OEM instruction document	80043-732-02 (01/2012)	A	S44 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-19; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00053	NQ24RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NQ 24 in. trim/rail and deadfront extension kit

OEM part number	NQ24RDE	A	S27 oem_spec
Description	24 in. rail and deadfront extension for NQ interiors (used with SFL/FTL/neutral accessories needing extra length)	A	S44, S27 p. 9-19; oem_spec
Kit contents	10-32x5/16 (10), 10-32x7/16 (2), deadfront support brackets (2), rail extensions (2), rail splices (2), 100/225 A main lug cover, 400/600 A main lug cover	A	S44 Kit Contents; oem_spec
OEM instruction document	80043-732-02 (01/2012)	A	S44 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-19; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00049	NQ3RDE	Square D	mounting-rail	IN 2012 BULLETIN; NOT

NQ 3 in. trim/rail and deadfront extension kit

OEM part number	NQ3RDE	A	S27 oem_spec
Description	3 in. rail and deadfront extension for NQ interiors (used with SFL/FTL/neutral accessories needing extra length)	A	S44 p. 9-19; oem_spec
Kit contents	10-32x5/16 (10), 10-32x7/16 (2), deadfront support brackets (2), rail extensions (2), rail splices (2), 100/225 A main lug cover, 400/600 A main lug cover	A	S44 Kit Contents; oem_spec
OEM instruction document	80043-732-02 (01/2012)	A	S44 oem_spec
Status	in 2012 bulletin; not in 2026 Digest list	C	S27 inference
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00050	NQ6RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NQ 6 in. trim/rail and deadfront extension kit

OEM part number	NQ6RDE	A	S27 oem_spec
Description	6 in. rail and deadfront extension for NQ interiors (used with SFL/FTL/neutral accessories needing extra length)	A	S44, S27 p. 9-19; oem_spec
Kit contents	10-32x5/16 (10), 10-32x7/16 (2), deadfront support brackets (2), rail extensions (2), rail splices (2), 100/225 A main lug cover, 400/600 A main lug cover	A	S44 Kit Contents; oem_spec
OEM instruction document	80043-732-02 (01/2012)	A	S44 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-19; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00126	**PKGTAB**	Equipment ground bar insulator kit	—	current (listed in 2026 Digest)

EDH-SQD-00126	PKGTAB	Square D	insulator	CURRENT (LISTED IN 202

Equipment ground bar insulator kit

OEM part number	PKGTAB	A	S27 oem_spec
Description	Equipment ground bar insulator kit	A	S27 p. 9-17, 9-19, 9-39; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	 inference
Status	current (listed in 2026 Digest)	A	S27 p. 9-17, 9-19, 9-39; oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00581	**NQHJLSC**	NQ fingersafe IP2X main breaker load-side cover (H-, J-frame main circuit breaker)	H-, J-frame main circuit breaker **A**	unknown
EDH-SQD-00046	**NQHJQLLC**	NQ U.S. service entrance barrier kit (H/J/Q main)	H/J/Q main circuit breaker in NQ **A**	current (listed in 2026 Digest)
EDH-SQD-00583	**NQLALHLSC**	NQ fingersafe IP2X main breaker load-side cover (LA/LH frame main circuit breaker)	LA/LH frame main circuit breaker **A**	unknown
EDH-SQD-00045	**NQLALLC**	NQ U.S. service entrance barrier kit (LA/LH main)	LA/LH main circuit breaker in NQ **A**	current (listed in 2026 Digest)
EDH-SQD-00584	**NQMLLSC**	NQ fingersafe IP2X main lugs cover (Main lugs)	Main lugs **A**	unknown
EDH-SQD-00585	**NQNCC**	NQ fingersafe IP2X neutral cover	—	unknown
EDH-SQD-00048	**NQODBFMB20**	NQ/NQOD back-fed main circuit breaker barrier kit	—	unknown
EDH-SQD-00047	**NQPPLLLC**	NQ U.S. service entrance barrier kit (PowerPacT L main)	PowerPacT L main circuit breaker in NQ; requires medium terminal shiel **A**	current (listed in 2026 Digest)
EDH-SQD-00582	**NQQLSC**	NQ fingersafe IP2X main breaker load-side cover (Q-frame main circuit breaker)	Q-frame main circuit breaker **A**	unknown

EDH-SQD-00581	NQHJLSC	Square D	barrier	STATUS UNKNOWN

NQ fingersafe IP2X main breaker load-side cover (H-, J-frame main circuit breaker)

OEM part number	NQHJLSC	A	S590 80043-822-01 table; 1640BR1701; oem_spec
Description	HJ Main Breaker IP2X Load Side Cover (1 per package). Snap-in plastic cover between the metal brackets/rails over the load side of the main breaker; removed after the neutral cover.	A	S590, S594 oem_spec
Application	main	A	S594 oem_spec
Breaker compatibility	H-, J-frame main circuit breaker	A	S594 80043-822-01 Commercial Reference table; oem_spec
Kit contents	1 cover	A	S590 oem_spec
OEM instruction document	80043-822-01 (11/2015); neutral cover per 80043-831-01 p.6	A	S594 oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, Material		

EDH-SQD-00046	NQHJQLLC	Square D	barrier	CURRENT (LISTED IN 202

NQ U.S. service entrance barrier kit (H/J/Q main)

OEM part number	NQHJQLLC	A	S27, S590 oem_spec
Alternate / superseded numbers	HJQLLC (Data bulletin prints 'HJQLLC' ('HJQ Main Breaker IP2X Line Lug Cover', qty 1); bulletin 80043-820-01 uses NQHJQLLC; 80043-839-01 prints NQHJQLLC with neutral bonding strap)	A	S590 alias; 1640BR1701 replacement parts table; oem_spec
Description	NQ H/J/Q line lug cover and neutral bonding strap	A	S27 p. 9-21; oem_spec
	Replacement main circuit breaker line-side cover for NQ fingersafe IP2X panelboards; snaps to mounting pan; cut out minimum openings for wire; for H, J and Q main covers with wire larger than 3/0 AWG remove the cut-outs on the undercover	A	S593 oem_spec
Application	main (service entrance)	A	S27 oem_spec
Installation location	Over main breaker line terminals; bonding strap neutral-to-ground	A	same as above
Breaker compatibility	H/J/Q main circuit breaker in NQ	A	S27, S72 Table 5; oem_spec
OEM instruction document	80043-839-01 Rev. 04 (Table 5); replacement parts 80043-820-01	A	S72 oem_spec
	80043-820-01 (11/2015)	A	S593 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-21; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00583	NQLALHLSC	Square D	barrier	STATUS UNKNOWN

NQ fingersafe IP2X main breaker load-side cover (LA/LH frame main circuit breaker)

OEM part number	NQLALHLSC	A	S590 80043-822-01 table; 1640BR1701; oem_spec
Description	LA/LH Main Breaker IP2X Load Side Cover (1 per package). Snap-in plastic cover between the metal brackets/rails over the load side of the main breaker; removed after the neutral cover.	A	S590, S594 oem_spec
Application	main	A	S594 oem_spec
Breaker compatibility	LA/LH frame main circuit breaker	A	S594 80043-822-01 Commercial Reference table; oem_spec
Kit contents	1 cover	A	S590 oem_spec
OEM instruction document	80043-822-01 (11/2015); neutral cover per 80043-831-01 p.6	A	S594 oem_spec
Cross-links	Families: NQ · Breakers: LA / LH (L-frame, legacy thermal-magnetic)		
Not yet documented	Dimensions, Material		

EDH-SQD-00045	NQLALLC	Square D	barrier	CURRENT (LISTED IN 202

NQ U.S. service entrance barrier kit (LA/LH main)

OEM part number	NQLALLC	A	S27, S590 oem_spec
Description	NQ LA/LH line lug cover, neutral bonding strap and lug	A	S27 p. 9-21; oem_spec
	Replacement LA/LH main circuit breaker line-side cover for NQ fingersafe IP2X panelboards (snap-on, cut minimum wire openings)	A	S593 oem_spec
Application	main (service entrance)	A	S27 oem_spec
Installation location	Over main breaker line terminals; bonding strap neutral-to-ground	A	same as above
Breaker compatibility	LA/LH main circuit breaker in NQ	A	S27, S72 Table 5; oem_spec
OEM instruction document	80043-839-01 Rev. 04 (Table 5); replacement parts 80043-820-01	A	S72 oem_spec
	80043-820-01 (11/2015)	A	S593 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-21; oem_spec
Cross-links	Families: NQ · Breakers: LA / LH (L-frame, legacy thermal-magnetic)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*1640BR1701 lists 'LALLC' (LA/LH Main Breaker IP2X Line Lug Cover) for NQ; the catalogue already has an I-Line part LALLC. Is the NQ data-bulletin entry a shortened NQLALLC or the same physical cover?*		

EDH-SQD-00584	NQMLLSC	Square D	barrier	STATUS UNKNOWN

NQ fingersafe IP2X main lugs cover (Main lugs)

OEM part number	NQMLLSC	A	S590 80043-822-01 table; 1640BR1701; oem_spec
Description	Main Lugs IP2X Cover (1 per package). Snap-in plastic cover between the metal brackets/rails over the main lugs; removed after the neutral cover.	A	S590, S594 oem_spec
Application	main (lugs)	A	S594 oem_spec
Breaker compatibility	Main lugs	A	S594 80043-822-01 Commercial Reference table; oem_spec
Kit contents	1 cover	A	S590 oem_spec
OEM instruction document	80043-822-01 (11/2015); neutral cover per 80043-831-01 p.6	A	S594 oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, Material		

EDH-SQD-00585	NQNCC	Square D	barrier	STATUS UNKNOWN

NQ fingersafe IP2X neutral cover

OEM part number	NQNCC	A	S590 80043-826-01 title; 1640BR1701; oem_spec
Description	NQ IP2X Neutral Cover (1 per package), replacement part for fingersafe NQ panelboards	A	S590, S595 oem_spec
Installation location	Over NQ neutral assembly	A	S590 oem_spec
OEM instruction document	80043-826-01 (11/2015)	A	S595 oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, Material		

EDH-SQD-00048	NQODBFMB20	Square D	barrier	UNKNOWN

NQ/NQOD back-fed main circuit breaker barrier kit

OEM part number	NQODBFMB20	A	S67 oem_spec
Description	Back-fed main circuit breaker barrier for NQ panelboard (adhesive-backed)	A	same as above
Kit contents	Back-fed main circuit breaker barrier (1)	A	same as above
OEM instruction document	80043-774-01 (04/2009), replaces 80043-687-03	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NQ, NQOD · Breakers: QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Whether NQODBFMB20 fits NQOD as well as NQ (prefix suggests NQOD origin)*		

EDH-SQD-00047	NQPPLLLC	Square D	barrier	CURRENT (LISTED IN 202

NQ U.S. service entrance barrier kit (PowerPacT L main)

OEM part number	NQPPLLLC	A	S27 oem_spec
Description	PowerPacT L line lug cover, neutral bonding strap and lug	A	S27 p. 9-21; oem_spec
Application	main (service entrance)	A	S27 oem_spec
Installation location	Over main breaker line terminals; bonding strap neutral-to-ground	A	same as above
Breaker compatibility	PowerPacT L main circuit breaker in NQ; requires medium terminal shield LTSM3P (not included)	A	S27, S72 Table 5; oem_spec
OEM instruction document	80043-839-01 Rev. 04 (Table 5); replacement parts 80043-820-01	A	S72 oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-21; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00582	NQQLSC	Square D	barrier	STATUS UNKNOWN

NQ fingersafe IP2X main breaker load-side cover (Q-frame main circuit breaker)

OEM part number	NQQLSC	A	S590 80043-822-01 table; 1640BR1701; oem_spec
Description	Q Main Breaker IP2X Load Side Cover (1 per package). Snap-in plastic cover between the metal brackets/rails over the load side of the main breaker; removed after the neutral cover.	A	S590, S594 oem_spec
Application	main	A	S594 oem_spec
Breaker compatibility	Q-frame main circuit breaker	A	S594 80043-822-01 Commercial Reference table; oem_spec
Kit contents	1 cover	A	S590 oem_spec
OEM instruction document	80043-822-01 (11/2015); neutral cover per 80043-831-01 p.6	A	S594 oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ)		
Not yet documented	Dimensions, Material		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00917	**NQRPLMB2HJ**	NQ main breaker deadfront replacement for NQMB2HJ kit (search summary)	—	unknown
EDH-SQD-00062	**NQRPLMB6PPL**	NQ PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A	—	unknown

EDH-SQD-00917	NQRPLMB2HJ	Square D	deadfront	STATUS UNKNOWN

NQ main breaker deadfront replacement for NQMB2HJ kit (search summary)

OEM part number	NQRPLMB2HJ (Number seen only in a search-engine summary of a blocked se.com FAQ)	C	S614 inference
Description	Replacement deadfront for the NQMB2HJ main breaker adapter kit	C	same as above
Cross-links	Families: NQ · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	everything except number		
Open question	*Confirm NQRPLMB2HJ on se.com (FAQ000259238/FAQ000270674 returned 403)*		

EDH-SQD-00062	NQRPLMB6PPL	Square D	deadfront	UNKNOWN

NQ PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A

OEM part number	NQRPLMB6PPL	A	S76 oem_spec
Alternate / superseded numbers	NQRPLMB63RPPL [equivalent] (600 A version for MH vented NEMA 3R enclosure)	A	same as above
Description	Replacement deadfront set for NQ 400/600 A PowerPacT L main circuit breaker and sub-feed breaker	A	same as above
Kit contents	Label bag, replacement screw bag, L-frame escutcheon, deadfront extension, deadfront cover, deadfront insulator	A	same as above
OEM instruction document	80043-848-01 (10/2020)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00054	**NQFP15**	NQ filler plates (15 per package)	—	current (listed in 2026 Digest)
EDH-SQD-00578	**QOFSBF12**	NQ IP2X bus finger filler (fingersafe replacement part), pkg of 12	Used where QO/QOB 10-60 A positions are empty (table marks 10-60 A row A	current (2015-2026 literature)

EDH-SQD-00054	NQFP15	Square D	filler-plate	CURRENT (LISTED IN 202

NQ filler plates (15 per package)

OEM part number	NQFP15	A	S27 oem_spec
Description	Deadfront filler plates, 15 per package	A	S27 p. 9-19; oem_spec
Installation location	Deadfront openings of unused branch spaces	B	S27 inference
Status	current (listed in 2026 Digest)	A	S27 p. 9-19; oem_spec
Cross-links	Families: NQ · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00578	QOFSBF12	Square D	filler-plate	CURRENT (2015-2026 LIT

NQ IP2X bus finger filler (fingersafe replacement part), pkg of 12

OEM part number	QOFSBF12	A	S590 1640BR1701 Replacement parts table; oem_spec
Alternate / superseded numbers	QOFSBF (Bulletin title uses QOFSBF (French title misprints QOFSBR); 1640BR1701 orders QOFSBF12 (12-pack).)	A	S591 alias; 80043-817-01 title; oem_spec
Description	NQ IP2X Bus Finger Filler; quantity per package 12. Snap-in filler plate that covers an empty branch position on fingersafe NQ interiors (mates with B-phase cover mounting hole, rotates until snap feature engages).	A	S590, S591 1640BR1701 replacement parts table; 80043-817-01 steps 2-5; oem_spec
Installation location	Branch area of NQ fingersafe (Standard IP2X) interior, over unused bus fingers	A	S590, S591 oem_spec
Breaker compatibility	Used where QO/QOB 10-60 A positions are empty (table marks 10-60 A rows 'L' column); used only with Standard IP2X design	A	S590 1640BR1701 footnote 3; oem_spec
Kit contents	12 fillers per package	A	S590 oem_spec
Material	Plastic (Data bulletin: 'plastic barriers cover mains, copper bus and branch circuit breakers'; filler material inferred from that statement)	B	same as above
OEM instruction document	80043-817-01 (11/2015); trim/deadfront removal per 80043-831-01	A	S591 oem_spec
Status	current (2015-2026 literature)	B	S590, S591 inference
Cross-links	Families: NQ · Breakers: QOB (bolt-on), QO (plug-on)		
Not yet documented	Dimensions, material grade		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00703	**LX40TS**	NQ column-width (single-row) front, 40 in box, surface	—	unknown
EDH-SQD-00704	**LX45TS**	NQ column-width (single-row) front, 45 in box, surface	—	unknown
EDH-SQD-00705	**LX58TS**	NQ column-width (single-row) front, 58 in box, surface	—	unknown
EDH-SQD-00706	**LX62TS**	NQ column-width (single-row) front, 62 in box, surface	—	unknown
EDH-SQD-00681	**NC26**	NC MONO-FLAT trim front for MH26 box (NQ/NF), F = flush, S = surface	—	unknown
EDH-SQD-00682	**NC32**	NC MONO-FLAT trim front for MH32 box (NQ/NF), F = flush, S = surface	—	unknown
EDH-SQD-00683	**NC38**	NC MONO-FLAT trim front for MH38 box (NQ/NF), F = flush, S = surface	—	unknown
EDH-SQD-00684	**NC44**	NC MONO-FLAT trim front for MH44 box (NQ/NF), F = flush, S = surface	—	unknown
EDH-SQD-00685	**NC50**	NC MONO-FLAT trim front for MH50 box (NQ/NF), F = flush, S = surface	—	unknown
EDH-SQD-00686	**NC50V**	NC vented-series trim front for MH50 box (400/600 A NQ, NF), F/S	—	unknown
EDH-SQD-00687	**NC56V**	NC vented-series trim front for MH56 box (400/600 A NQ, NF), F/S	—	unknown
EDH-SQD-00688	**NC62V**	NC vented-series trim front for MH62 box (400/600 A NQ, NF), F/S	—	unknown
EDH-SQD-00689	**NC68V**	NC vented-series trim front for MH68 box (400/600 A NQ, NF), F/S	—	unknown
EDH-SQD-00690	**NC74V**	NC vented-series trim front for MH74 box (400/600 A NQ, NF), F/S	—	unknown
EDH-SQD-00691	**NC80V**	NC vented-series trim front for MH80 box (400/600 A NQ, NF), F/S	—	unknown
EDH-SQD-00692	**NC86V**	NC vented-series trim front for MH86 box (400/600 A NQ, NF), F/S	—	unknown
EDH-SQD-00750	**NQC32**	MONO-FLAT front for 14 in wide NQB532 box (F/S)	—	unknown
EDH-SQD-00752	**NQC38**	MONO-FLAT front for 14 in wide NQB538 box (F/S)	—	unknown
EDH-SQD-00754	**NQC44**	MONO-FLAT front for 14 in wide NQB544 box (F/S)	—	unknown
EDH-SQD-00755	**NQC50**	MONO-FLAT front for 14 in wide NQB550 box (F/S)	—	unknown

EDH-SQD-00703	LX40TS	Square D	trim	STATUS UNKNOWN

NQ column-width (single-row) front, 40 in box, surface

OEM part number	LX40TS	A	S27 Digest Sec.9 Table 9.86 p.9-43; oem_spec
Alternate / superseded numbers	LX-40TF / LX-40TS (1970 Digest 152 used LX-xxTF/S column-width fronts for NQO; same numbering style - continuity is inference)	C	S463 alias; oem_spec
Description	Surface-mount front for NQ single-row (column-width) panelboard, box 8.625 in W x 5 in D, 40 in high; used with NQ820B1C / NQ8430L1C	A	S27 oem_spec
Cross-links	Families: NQ		

EDH-SQD-00704	LX45TS	Square D	trim	STATUS UNKNOWN

NQ column-width (single-row) front, 45 in box, surface

OEM part number	LX45TS	A	S27 Digest Sec.9 Table 9.86 p.9-43; oem_spec
Alternate / superseded numbers	LX-45TF / LX-45TS (1970 Digest 152 used LX-xxTF/S column-width fronts for NQO; same numbering style - continuity is inference)	C	S463 alias; oem_spec
Description	Surface-mount front for NQ single-row (column-width) panelboard, box 8.625 in W x 5 in D, 45 in high; used with NQ830L2C / NQ8430B1C	A	S27 oem_spec
Cross-links	Families: NQ		

EDH-SQD-00705	LX58TS	Square D	trim	STATUS UNKNOWN

NQ column-width (single-row) front, 58 in box, surface

OEM part number	LX58TS	A	S27 Digest Sec.9 Table 9.86 p.9-43; oem_spec
Description	Surface-mount front for NQ single-row (column-width) panelboard, box 8.625 in W x 5 in D, 58 in high; used with NQ8442L2C	A	S27 oem_spec
Cross-links	Families: NQ		

EDH-SQD-00706	LX62TS	Square D	trim	STATUS UNKNOWN

NQ column-width (single-row) front, 62 in box, surface

OEM part number	LX62TS	A	S27 Digest Sec.9 Table 9.86 p.9-43; oem_spec
Description	Surface-mount front for NQ single-row (column-width) panelboard, box 8.625 in W x 5 in D, 62 in high; used with NQ8442B2C	A	S27 oem_spec
Cross-links	Families: NQ		

EDH-SQD-00681	NC26	Square D	trim	STATUS UNKNOWN

NC MONO-FLAT trim front for MH26 box (NQ/NF), F = flush, S = surface

OEM part number	NC26	A	S27 Digest Sec.9 Table 9.3; oem_spec
Alternate / superseded numbers	NC26F (flush)	A	S27 alias; oem_spec
	NC26S [alias] (surface)	A	same as above
	NC26FHR / NC26SHR [alias] (hinged trim front variant (separate catalog number))	A	same as above
Description	MONO-FLAT trim front for 20 in wide MH26 box; order with suffix F (flush) or S (surface); hinged version adds HR (NC26( )HR = hinged trim, hinged right); metal directory frame option add 'WMD'	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions, door lock type		

EDH-SQD-00682	NC32	Square D	trim	STATUS UNKNOWN

NC MONO-FLAT trim front for MH32 box (NQ/NF), F = flush, S = surface

OEM part number	NC32	**A**	S27 Digest Sec.9 Table 9.3; oem_spec
Alternate / superseded numbers	NC32F (flush)	**A**	S27 alias; oem_spec
	NC32S [alias] (surface)	**A**	same as above
	NC32FHR / NC32SHR [alias] (hinged trim front variant (separate catalog number))	**A**	same as above
Description	MONO-FLAT trim front for 20 in wide MH32 box; order with suffix F (flush) or S (surface); hinged version adds HR (NC32( )HR = hinged trim, hinged right); metal directory frame option add 'WMD'	**A**	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions, door lock type		

EDH-SQD-00683	NC38	Square D	trim	STATUS UNKNOWN

NC MONO-FLAT trim front for MH38 box (NQ/NF), F = flush, S = surface

OEM part number	NC38	**A**	S27 Digest Sec.9 Table 9.3; oem_spec
Alternate / superseded numbers	NC38F (flush)	**A**	S27 alias; oem_spec
	NC38S [alias] (surface)	**A**	same as above
	NC38FHR / NC38SHR [alias] (hinged trim front variant (separate catalog number))	**A**	same as above
Description	MONO-FLAT trim front for 20 in wide MH38 box; order with suffix F (flush) or S (surface); hinged version adds HR (NC38( )HR = hinged trim, hinged right); metal directory frame option add 'WMD'	**A**	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions, door lock type		

EDH-SQD-00684	NC44	Square D	trim	STATUS UNKNOWN

NC MONO-FLAT trim front for MH44 box (NQ/NF), F = flush, S = surface

OEM part number	NC44	**A**	S27 Digest Sec.9 Table 9.3; oem_spec
Alternate / superseded numbers	NC44F (flush)	**A**	S27 alias; oem_spec
	NC44S [alias] (surface)	**A**	same as above
	NC44FHR / NC44SHR [alias] (hinged trim front variant (separate catalog number))	**A**	same as above
Description	MONO-FLAT trim front for 20 in wide MH44 box; order with suffix F (flush) or S (surface); hinged version adds HR (NC44( )HR = hinged trim, hinged right); metal directory frame option add 'WMD'	**A**	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions, door lock type		

EDH-SQD-00685	NC50	Square D	trim	STATUS UNKNOWN

NC MONO-FLAT trim front for MH50 box (NQ/NF), F = flush, S = surface

OEM part number	NC50	**A**	S27 Digest Sec.9 Table 9.3; oem_spec
Alternate / superseded numbers	NC50F (flush)	**A**	S27 alias; oem_spec
	NC50S [alias] (surface)	**A**	same as above
	NC50FHR / NC50SHR [alias] (hinged trim front variant (separate catalog number))	**A**	same as above
Description	MONO-FLAT trim front for 20 in wide MH50 box; order with suffix F (flush) or S (surface); hinged version adds HR (NC50( )HR = hinged trim, hinged right); metal directory frame option add 'WMD'	**A**	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions, door lock type		

EDH-SQD-00686	NC50V	Square D	trim	STATUS UNKNOWN

NC vented-series trim front for MH50 box (400/600 A NQ, NF), F/S

OEM part number	NC50V	A	S27 Digest Sec.9 Table 9.3 / NF tables; oem_spec
Alternate / superseded numbers	NC50VF / NC50VS	A	S27 alias; oem_spec
	NC50V( )HR [alias] (hinged)	A	same as above
	NC50V( )3P / NC50V( )3PHR [alias] (three-point latch)	A	same as above
Description	Trim front for MH50 box used on 400-600 A NQ and NF panelboards; suffix F/S; variants HR (hinged), 3P (three-point latch, required with QO2175/QO2200 branch breakers and with PowerPacT L/M/P), 3PHR	A	S27, S48 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions		
Open question	*V in NCxxV denotes 'vented' per 80043-741-03 footnote 5 (V=Vented) - confirm physical vents on NEMA 1 trims*		

EDH-SQD-00687	NC56V	Square D	trim	STATUS UNKNOWN

NC vented-series trim front for MH56 box (400/600 A NQ, NF), F/S

OEM part number	NC56V	A	S27 Digest Sec.9 Table 9.3 / NF tables; oem_spec
Alternate / superseded numbers	NC56VF / NC56VS	A	S27 alias; oem_spec
	NC56V( )HR [alias] (hinged)	A	same as above
	NC56V( )3P / NC56V( )3PHR [alias] (three-point latch)	A	same as above
Description	Trim front for MH56 box used on 400-600 A NQ and NF panelboards; suffix F/S; variants HR (hinged), 3P (three-point latch, required with QO2175/QO2200 branch breakers and with PowerPacT L/M/P), 3PHR	A	S27, S48 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions		
Open question	*V in NCxxV denotes 'vented' per 80043-741-03 footnote 5 (V=Vented) - confirm physical vents on NEMA 1 trims*		

EDH-SQD-00688	NC62V	Square D	trim	STATUS UNKNOWN

NC vented-series trim front for MH62 box (400/600 A NQ, NF), F/S

OEM part number	NC62V	A	S27 Digest Sec.9 Table 9.3 / NF tables; oem_spec
Alternate / superseded numbers	NC62VF / NC62VS	A	S27 alias; oem_spec
	NC62V( )HR [alias] (hinged)	A	same as above
	NC62V( )3P / NC62V( )3PHR [alias] (three-point latch)	A	same as above
Description	Trim front for MH62 box used on 400-600 A NQ and NF panelboards; suffix F/S; variants HR (hinged), 3P (three-point latch, required with QO2175/QO2200 branch breakers and with PowerPacT L/M/P), 3PHR	A	S27, S48 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions		
Open question	*V in NCxxV denotes 'vented' per 80043-741-03 footnote 5 (V=Vented) - confirm physical vents on NEMA 1 trims*		

EDH-SQD-00689	NC68V	Square D	trim	STATUS UNKNOWN

NC vented-series trim front for MH68 box (400/600 A NQ, NF), F/S

OEM part number	NC68V	A	S27 Digest Sec.9 Table 9.3 / NF tables; oem_spec
Alternate / superseded numbers	NC68VF / NC68VS	A	S27 alias; oem_spec
	NC68V( )HR [alias] (hinged)	A	same as above
	NC68V( )3P / NC68V( )3PHR [alias] (three-point latch)	A	same as above
Description	Trim front for MH68 box used on 400-600 A NQ and NF panelboards; suffix F/S; variants HR (hinged), 3P (three-point latch, required with QO2175/QO2200 branch breakers and with PowerPacT L/M/P), 3PHR	A	S27, S48 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions		
Open question	*V in NCxxV denotes 'vented' per 80043-741-03 footnote 5 (V=Vented) - confirm physical vents on NEMA 1 trims*		

EDH-SQD-00690	NC74V	Square D	trim	STATUS UNKNOWN

NC vented-series trim front for MH74 box (400/600 A NQ, NF), F/S

OEM part number	NC74V	A	S27 Digest Sec.9 Table 9.3 / NF tables; oem_spec
Alternate / superseded numbers	NC74VF / NC74VS	A	S27 alias; oem_spec
	NC74V( )HR [alias] (hinged)	A	same as above
	NC74V( )3P / NC74V( )3PHR [alias] (three-point latch)	A	same as above
Description	Trim front for MH74 box used on 400-600 A NQ and NF panelboards; suffix F/S; variants HR (hinged), 3P (three-point latch, required with QO2175/QO2200 branch breakers and with PowerPacT L/M/P), 3PHR	A	S27, S48 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions		
Open question	*V in NCxxV denotes 'vented' per 80043-741-03 footnote 5 (V=Vented) - confirm physical vents on NEMA 1 trims*		

EDH-SQD-00691	NC80V	Square D	trim	STATUS UNKNOWN

NC vented-series trim front for MH80 box (400/600 A NQ, NF), F/S

OEM part number	NC80V	A	S27 Digest Sec.9 Table 9.3 / NF tables; oem_spec
Alternate / superseded numbers	NC80VF / NC80VS	A	S27 alias; oem_spec
	NC80V( )HR [alias] (hinged)	A	same as above
	NC80V( )3P / NC80V( )3PHR [alias] (three-point latch)	A	same as above
Description	Trim front for MH80 box used on 400-600 A NQ and NF panelboards; suffix F/S; variants HR (hinged), 3P (three-point latch, required with QO2175/QO2200 branch breakers and with PowerPacT L/M/P), 3PHR	A	S27, S48 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions		
Open question	*V in NCxxV denotes 'vented' per 80043-741-03 footnote 5 (V=Vented) - confirm physical vents on NEMA 1 trims*		

EDH-SQD-00692	NC86V	Square D	trim	STATUS UNKNOWN

NC vented-series trim front for MH86 box (400/600 A NQ, NF), F/S

OEM part number	NC86V	**A**	S27 Digest Sec.9 Table 9.3 / NF tables; oem_spec
Alternate / superseded numbers	NC86VF / NC86VS	**A**	S27 alias; oem_spec
	NC86V( )HR [alias] (hinged)	**A**	same as above
	NC86V( )3P / NC86V( )3PHR [alias] (three-point latch)	**A**	same as above
Description	Trim front for MH86 box used on 400-600 A NQ and NF panelboards; suffix F/S; variants HR (hinged), 3P (three-point latch, required with QO2175/QO2200 branch breakers and with PowerPacT L/M/P), 3PHR	**A**	S27, S48 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions		
Open question	*V in NCxxV denotes 'vented' per 80043-741-03 footnote 5 (V=Vented) - confirm physical vents on NEMA 1 trims*		

EDH-SQD-00750	NQC32	Square D	trim	STATUS UNKNOWN

MONO-FLAT front for 14 in wide NQB532 box (F/S)

OEM part number	NQC32	**A**	S27 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Alternate / superseded numbers	NQC32F / NQC32S	**A**	S27, S609 alias; oem_spec
Description	MONO-FLAT front for 14 in W box NQB532; add F (flush) / S (surface); hinged front N/A for NQ14	**A**	same as above
Cross-links	Families: NQ, NQOD		

EDH-SQD-00752	NQC38	Square D	trim	STATUS UNKNOWN

MONO-FLAT front for 14 in wide NQB538 box (F/S)

OEM part number	NQC38	**A**	S27 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Alternate / superseded numbers	NQC38F / NQC38S	**A**	S27 alias; oem_spec
Description	MONO-FLAT front for 14 in W box NQB538; add F (flush) / S (surface); hinged front N/A for NQ14	**A**	same as above
Cross-links	Families: NQ		

EDH-SQD-00754	NQC44	Square D	trim	STATUS UNKNOWN

MONO-FLAT front for 14 in wide NQB544 box (F/S)

OEM part number	NQC44	**A**	S27 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Alternate / superseded numbers	NQC44F / NQC44S	**A**	S27, S609 alias; oem_spec
Description	MONO-FLAT front for 14 in W box NQB544; add F (flush) / S (surface); hinged front N/A for NQ14	**A**	same as above
Cross-links	Families: NQ, NQOD		

EDH-SQD-00755	NQC50	Square D	trim	STATUS UNKNOWN

MONO-FLAT front for 14 in wide NQB550 box (F/S)

OEM part number	NQC50	A	S27 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Alternate / superseded numbers	NQC50F / NQC50S	A	S27, S609 alias; oem_spec
Description	MONO-FLAT front for 14 in W box NQB550; add F (flush) / S (surface); hinged front N/A for NQ14	A	same as above
Cross-links	Families: NQ, NQOD		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00633	**MH26**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 26 in H	—	unknown
EDH-SQD-00653	**MH26WP**	MH weatherproof enclosure Type 3R/5/12, 26 in H (NQ/NF)	—	unknown
EDH-SQD-00635	**MH32**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 32 in H	—	unknown
EDH-SQD-00655	**MH32WP**	MH weatherproof enclosure Type 3R/5/12, 32 in H (NQ/NF)	—	unknown
EDH-SQD-00637	**MH38**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 38 in H	—	unknown
EDH-SQD-00657	**MH38WP**	MH weatherproof enclosure Type 3R/5/12, 38 in H (NQ/NF)	—	unknown
EDH-SQD-00639	**MH44**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 44 in H	—	unknown
EDH-SQD-00659	**MH44WP**	MH weatherproof enclosure Type 3R/5/12, 44 in H (NQ/NF)	—	unknown
EDH-SQD-00640	**MH50**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 50 in H	—	unknown
EDH-SQD-00660	**MH50WP**	MH weatherproof enclosure Type 3R/5/12, 50 in H (NQ/NF)	—	unknown
EDH-SQD-00642	**MH56**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 56 in H	—	unknown
EDH-SQD-00662	**MH56WP**	MH weatherproof enclosure Type 3R/5/12, 56 in H (NQ/NF)	—	unknown
EDH-SQD-00644	**MH62**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 62 in H	—	unknown
EDH-SQD-00136	**MH62D9**	MH box, 20 in. W x 8.75 in. D x 62 in. H (D9, for PowerPacT L)	—	current (listed in 2026 Digest)
EDH-SQD-00675	**MH62D9VWP**	MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 62 in H	—	unknown
EDH-SQD-00664	**MH62WP**	MH weatherproof enclosure Type 3R/5/12, 62 in H (NQ/NF)	—	unknown
EDH-SQD-00646	**MH68**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 68 in H	—	unknown
EDH-SQD-00137	**MH68D9**	MH box, 20 in. W x 8.75 in. D x 68 in. H (D9, for PowerPacT L)	—	current (listed in 2026 Digest)
EDH-SQD-00676	**MH68D9VWP**	MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 68 in H	—	unknown
EDH-SQD-00666	**MH68WP**	MH weatherproof enclosure Type 3R/5/12, 68 in H (NQ/NF)	—	unknown
EDH-SQD-00647	**MH74**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 74 in H	—	unknown
EDH-SQD-00138	**MH74D9**	MH box, 20 in. W x 8.75 in. D x 74 in. H (D9, for PowerPacT L)	—	current (listed in 2026 Digest)
EDH-SQD-00677	**MH74D9VWP**	MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 74 in H	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00667	**MH74WP**	MH weatherproof enclosure Type 3R/5/12, 74 in H (NQ/NF)	—	unknown
EDH-SQD-00649	**MH80**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 80 in H	—	unknown
EDH-SQD-00139	**MH80D9**	MH box, 20 in. W x 8.75 in. D x 80 in. H (D9, for PowerPacT L)	—	current (listed in 2026 Digest)
EDH-SQD-00678	**MH80D9VWP**	MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 80 in H	—	unknown
EDH-SQD-00669	**MH80WP**	MH weatherproof enclosure Type 3R/5/12, 80 in H (NQ/NF)	—	unknown
EDH-SQD-00650	**MH86**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 86 in H	—	unknown
EDH-SQD-00140	**MH86D9**	MH box, 20 in. W x 8.75 in. D x 86 in. H (D9, for PowerPacT L)	—	current (listed in 2026 Digest)
EDH-SQD-00679	**MH86D9VWP**	MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 86 in H	—	unknown
EDH-SQD-00670	**MH86WP**	MH weatherproof enclosure Type 3R/5/12, 86 in H (NQ/NF)	—	unknown
EDH-SQD-00651	**MH92**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 92 in H	—	unknown
EDH-SQD-00141	**MH92D9**	MH box, 20 in. W x 8.75 in. D x 92 in. H (D9, for PowerPacT L)	—	current (listed in 2026 Digest)
EDH-SQD-00680	**MH92D9VWP**	MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 92 in H	—	unknown
EDH-SQD-00132	**MHBE20**	Blank endwall for 20 in. wide MH enclosure (one per package)	—	current (listed in 2026 Digest)
EDH-SQD-00135	**MHBE26**	Blank endwall, 26 in. wide MH enclosure (one per package)	—	current (listed in 2026 Digest)
EDH-SQD-00134	**MHCO20**	NF/NQ rectangular cutout endwall kit for 20 in. wide NEMA 1 MH enclosure	—	current (listed in 2026 Digest)
EDH-SQD-00603	**MHCOEW20A**	Endwall and closing plate replacement kit, 20 in MH enclosure (NQ/NF)	—	unknown
EDH-SQD-00604	**MHCOEW20F**	Endwall and closing plate replacement kit, 20 in MH enclosure (NQ/NF)	—	unknown
EDH-SQD-00133	**MHKE20**	Endwall with knockouts for 20 in. wide MH enclosure (one per package)	—	current (listed in 2026 Digest)
EDH-SQD-00715	**MPX81542**	Pull box with solid neutral, 42 terminals, column-width NQ/NF	—	unknown
EDH-SQD-00707	**MTX836**	Cable trough 36 in for NQ column-width panelboard	—	unknown
EDH-SQD-00708	**MTX848**	Cable trough 48 in for NQ column-width panelboard	—	unknown
EDH-SQD-00709	**MTX856**	Cable trough 56 in for NQ column-width panelboard	—	unknown
EDH-SQD-00710	**MTX866**	Cable trough 66 in for NQ column-width panelboard	—	unknown
EDH-SQD-00739	**NQB532**	14 in wide panelboard box, 14 in W x 5.75 in D x 32 in H (NQ14 / NQOD 14 in)	—	unknown
EDH-SQD-00741	**NQB538**	14 in wide panelboard box, 14 in W x 5.75 in D x 38 in H (NQ14 / NQOD 14 in)	—	unknown
EDH-SQD-00743	**NQB544**	14 in wide panelboard box, 14 in W x 5.75 in D x 44 in H (NQ14 / NQOD 14 in)	—	unknown
EDH-SQD-00744	**NQB550**	14 in wide panelboard box, 14 in W x 5.75 in D x 50 in H (NQ14 / NQOD 14 in)	—	unknown

EDH-SQD-00633	MH26	Square D	box/enclosure	STATUS UNKNOWN

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 26 in H

OEM part number	MH26	A	S27 Digest Sec.9 Table 9.3 / NF Table 9.70; 2009 Digest 13-10/13-11/13-13; oem_spec
Alternate / superseded numbers	MH26BE ('BE' suffix = blank endwalls at both ends of NEMA 1 enclosure (standard box has one blank endwall and one with knockouts))	A	S27 alias; Table 9.3 note [9]; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 26 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S27, S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 26 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00653	MH26WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 26 in H (NQ/NF)

OEM part number	MH26WP	A	S601 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 26 in	A	S601, S27, S609 oem_spec
Kit contents	Weatherproof enclosure (1), wall bracket (1), locking handle (1), locking handle gasket (1), 8-32 x 5/16 in SEMS screws (2), latch plate (1), 3/8 in lock washer (1), 3/8-16 hex nut (1)	A	S601 p.2 table; oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	S601, S27, S609 oem_spec
Torque values	Handle SEMS screws 24-35 lb-in (2.7-4.0 N-m); handle hex nut 50-70 lb-in (5.6-7.9 N-m); Type 5/12 Square D conduit hubs H050..H0400 (CP = chrome) 66-133 lb-ft	A	S601 oem_spec
OEM instruction document	80043-771-01 (03/2009) (replaces 80043-455-04); MH26WP-MH56WP ship with door clipped shut; Type 3R must be bottom fed; 400-600 A in 44 in enclosures has special cover-trim step	A	S601, S27 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00635	MH32	Square D	box/enclosure	STATUS UNKNOWN

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 32 in H

OEM part number	MH32	A	S27 Digest Sec.9 Table 9.3 / NF Table 9.70; 2009 Digest 13-10/13-11/13-13; oem_spec
Alternate / superseded numbers	MH32BE ('BE' suffix = blank endwalls at both ends of NEMA 1 enclosure (standard box has one blank endwall and one with knockouts))	A	S27 alias; Table 9.3 note [9]; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 32 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S27, S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 32 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00655	MH32WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 32 in H (NQ/NF)

OEM part number	MH32WP	A	S601 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 32 in	A	S601, S27, S609 oem_spec
Kit contents	Weatherproof enclosure (1), wall bracket (1), locking handle (1), locking handle gasket (1), 8-32 x 5/16 in SEMS screws (2), latch plate (1), 3/8 in lock washer (1), 3/8-16 hex nut (1)	A	S601 p.2 table; oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	S601, S27, S609 oem_spec
Torque values	Handle SEMS screws 24-35 lb-in (2.7-4.0 N-m); handle hex nut 50-70 lb-in (5.6-7.9 N-m); Type 5/12 Square D conduit hubs H050..H0400 (CP = chrome) 66-133 lb-ft	A	S601 oem_spec
OEM instruction document	80043-771-01 (03/2009) (replaces 80043-455-04); MH26WP-MH56WP ship with door clipped shut; Type 3R must be bottom fed; 400-600 A in 44 in enclosures has special cover-trim step	A	S601, S27 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00637	MH38	Square D	box/enclosure	STATUS UNKNOWN

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 38 in H

OEM part number	MH38	A	S27 Digest Sec.9 Table 9.3 / NF Table 9.70; 2009 Digest 13-10/13-11/13-13; oem_spec
Alternate / superseded numbers	MH38BE ('BE' suffix = blank endwalls at both ends of NEMA 1 enclosure (standard box has one blank endwall and one with knockouts))	A	S27 alias; Table 9.3 note [9]; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 38 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S27, S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 38 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00657	MH38WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 38 in H (NQ/NF)

OEM part number	MH38WP	A	S601 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 38 in	A	S601, S27, S609 oem_spec
Kit contents	Weatherproof enclosure (1), wall bracket (1), locking handle (2), locking handle gasket (2), 8-32 x 5/16 in SEMS screws (4), latch plate (2), 3/8 in lock washer (2), 3/8-16 hex nut (2)	A	S601 p.2 table; oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	S601, S27, S609 oem_spec
Torque values	Handle SEMS screws 24-35 lb-in (2.7-4.0 N-m); handle hex nut 50-70 lb-in (5.6-7.9 N-m); Type 5/12 Square D conduit hubs H050..H0400 (CP = chrome) 66-133 lb-ft	A	S601 oem_spec
OEM instruction document	80043-771-01 (03/2009) (replaces 80043-455-04); MH26WP-MH56WP ship with door clipped shut; Type 3R must be bottom fed; 400-600 A in 44 in enclosures has special cover-trim step	A	S601, S27 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00639	MH44	Square D	box/enclosure	STATUS UNKNOWN

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 44 in H

OEM part number	MH44	A	S27 Digest Sec.9 Table 9.3 / NF Table 9.70; 2009 Digest 13-10/13-11/13-13; oem_spec
Alternate / superseded numbers	MH44BE ('BE' suffix = blank endwalls at both ends of NEMA 1 enclosure (standard box has one blank endwall and one with knockouts))	A	S27 alias; Table 9.3 note [9]; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 44 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S27, S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 44 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00659	MH44WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 44 in H (NQ/NF)

OEM part number	MH44WP	A	S601 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 44 in	A	S601, S27, S609 oem_spec
Kit contents	Weatherproof enclosure (1), wall bracket (1), locking handle (2), locking handle gasket (2), 8-32 x 5/16 in SEMS screws (4), latch plate (2), 3/8 in lock washer (2), 3/8-16 hex nut (2)	A	S601 p.2 table; oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	S601, S27, S609 oem_spec
Torque values	Handle SEMS screws 24-35 lb-in (2.7-4.0 N-m); handle hex nut 50-70 lb-in (5.6-7.9 N-m); Type 5/12 Square D conduit hubs H050..H0400 (CP = chrome) 66-133 lb-ft	A	S601 oem_spec
OEM instruction document	80043-771-01 (03/2009) (replaces 80043-455-04); MH26WP-MH56WP ship with door clipped shut; Type 3R must be bottom fed; 400-600 A in 44 in enclosures has special cover-trim step	A	S601, S27 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00640	MH50	Square D	box/enclosure	STATUS UNKNOWN

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 50 in H

OEM part number	MH50	A	S27 Digest Sec.9 Table 9.3 / NF Table 9.70; 2009 Digest 13-10/13-11/13-13; oem_spec
Alternate / superseded numbers	MH50BE ('BE' suffix = blank endwalls at both ends of NEMA 1 enclosure (standard box has one blank endwall and one with knockouts))	A	S27 alias; Table 9.3 note [9]; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 50 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S27, S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 50 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00660	MH50WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 50 in H (NQ/NF)

OEM part number	MH50WP	A	S601 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 50 in	A	S601, S27, S609 oem_spec
Kit contents	Weatherproof enclosure (1), wall bracket (1), locking handle (2), locking handle gasket (2), 8-32 x 5/16 in SEMS screws (4), latch plate (2), 3/8 in lock washer (2), 3/8-16 hex nut (2)	A	S601 p.2 table; oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	S601, S27, S609 oem_spec
Torque values	Handle SEMS screws 24-35 lb-in (2.7-4.0 N-m); handle hex nut 50-70 lb-in (5.6-7.9 N-m); Type 5/12 Square D conduit hubs H050..H0400 (CP = chrome) 66-133 lb-ft	A	S601 oem_spec
OEM instruction document	80043-771-01 (03/2009) (replaces 80043-455-04); MH26WP-MH56WP ship with door clipped shut; Type 3R must be bottom fed; 400-600 A in 44 in enclosures has special cover-trim step	A	S601, S27 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00642	MH56	Square D	box/enclosure	STATUS UNKNOWN

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 56 in H

OEM part number	MH56	A	S27 Digest Sec.9 Table 9.3 / NF Table 9.70; 2009 Digest 13-10/13-11/13-13; oem_spec
Alternate / superseded numbers	MH56BE ('BE' suffix = blank endwalls at both ends of NEMA 1 enclosure (standard box has one blank endwall and one with knockouts))	A	S27 alias; Table 9.3 note [9]; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 56 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S27, S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 56 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00662	MH56WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 56 in H (NQ/NF)

OEM part number	MH56WP	A	S601 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 56 in	A	S601, S27, S609 oem_spec
Kit contents	Weatherproof enclosure (1), wall bracket (1), locking handle (2), locking handle gasket (2), 8-32 x 5/16 in SEMS screws (4), latch plate (2), 3/8 in lock washer (2), 3/8-16 hex nut (2)	A	S601 p.2 table; oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	S601, S27, S609 oem_spec
Torque values	Handle SEMS screws 24-35 lb-in (2.7-4.0 N-m); handle hex nut 50-70 lb-in (5.6-7.9 N-m); Type 5/12 Square D conduit hubs H050..H0400 (CP = chrome) 66-133 lb-ft	A	S601 oem_spec
OEM instruction document	80043-771-01 (03/2009) (replaces 80043-455-04); MH26WP-MH56WP ship with door clipped shut; Type 3R must be bottom fed; 400-600 A in 44 in enclosures has special cover-trim step	A	S601, S27 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00644	MH62	Square D	box/enclosure	STATUS UNKNOWN

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 62 in H

OEM part number	MH62	A	S27 Digest Sec.9 Table 9.3 / NF Table 9.70; 2009 Digest 13-10/13-11/13-13; oem_spec
Alternate / superseded numbers	MH62BE ('BE' suffix = blank endwalls at both ends of NEMA 1 enclosure (standard box has one blank endwall and one with knockouts))	A	S27 alias; Table 9.3 note [9]; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 62 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S27, S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 62 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00136	MH62D9	Square D	box/enclosure	CURRENT (LISTED IN 202

MH box, 20 in. W x 8.75 in. D x 62 in. H (D9, for PowerPacT L)

OEM part number	MH62D9	A	S27 oem_spec
Description	NEMA 1 MH enclosure, 8.75 in. deep (D9 suffix) required for NQ/NF with PowerPacT L main, switch or sub-feed breaker; both endwalls blank	A	S27 p. 9-9 fn, 9-31 fn; oem_spec
Dimensions	20 in. W x 8.75 in. D; height 62 in. (box catalog number = height)	A	S27 p. 9-9/9-10; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-9; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00675	MH62D9VWP	Square D	box/enclosure	STATUS UNKNOWN

MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 62 in H

OEM part number	MH62D9VWP	A	S602 80043-850-01; Digest Table 9.3 note [13]; oem_spec
Description	Vented Type 3R enclosure with three-point latch door, 26 in W x 8.75 in D; required for outdoor NQ/NF with two sub-feed breakers or sub-feed breaker >150 A, and for PowerPacT L main/sub-feed; must be bottom fed (select NQ12RDE kit)	A	S602, S27 oem_spec
Kit contents	Enclosure with elevating bracket(s), wall bracket (1); MH86D9VWP/MH92D9VWP use elevating brackets and studs (repositioned for NF)	A	S602 Kit Contents p.5, pp.14-20; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	exact dimensions		

EDH-SQD-00664	MH62WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 62 in H (NQ/NF)

OEM part number	MH62WP	A	S601 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF panelboards; nominal height 62 in	A	S601, S27 oem_spec
Kit contents	Weatherproof enclosure (1), wall bracket (1), locking handle (1), locking handle gasket (1), 8-32 x 5/16 in SEMS screws (2), latch plate (1), 3/8 in lock washer (1), 3/8-16 hex nut (1)	A	S601 p.2 table; oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	S601, S27 oem_spec
Torque values	Handle SEMS screws 24-35 lb-in (2.7-4.0 N-m); handle hex nut 50-70 lb-in (5.6-7.9 N-m); Type 5/12 Square D conduit hubs H050..H0400 (CP = chrome) 66-133 lb-ft	A	S601 oem_spec
OEM instruction document	80043-771-01 (03/2009) (replaces 80043-455-04); MH26WP-MH56WP ship with door clipped shut; Type 3R must be bottom fed; 400-600 A in 44 in enclosures has special cover-trim step	A	S601, S27 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00646	MH68	Square D	box/enclosure	STATUS UNKNOWN

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 68 in H

OEM part number	MH68	A	S27 Digest Sec.9 Table 9.3 / NF Table 9.70; 2009 Digest 13-10/13-11/13-13; oem_spec
Alternate / superseded numbers	MH68BE ('BE' suffix = blank endwalls at both ends of NEMA 1 enclosure (standard box has one blank endwall and one with knockouts))	A	S27 alias; Table 9.3 note [9]; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 68 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S27, S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 68 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00137	MH68D9	Square D	box/enclosure	CURRENT (LISTED IN 202

MH box, 20 in. W x 8.75 in. D x 68 in. H (D9, for PowerPacT L)

OEM part number	MH68D9	A	S27 oem_spec
Description	NEMA 1 MH enclosure, 8.75 in. deep (D9 suffix) required for NQ/NF with PowerPacT L main, switch or sub-feed breaker; both endwalls blank	A	S27 p. 9-9 fn, 9-31 fn; oem_spec
Dimensions	20 in. W x 8.75 in. D; height 68 in. (box catalog number = height)	A	S27 p. 9-9/9-10; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-9; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00676	MH68D9VWP	Square D	box/enclosure	STATUS UNKNOWN

MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 68 in H

OEM part number	MH68D9VWP	A	S602 80043-850-01; Digest Table 9.3 note [13]; oem_spec
Description	Vented Type 3R enclosure with three-point latch door, 26 in W x 8.75 in D; required for outdoor NQ/NF with two sub-feed breakers or sub-feed breaker >150 A, and for PowerPacT L main/sub-feed; must be bottom fed (select NQ12RDE kit)	A	S602, S27 oem_spec
Kit contents	Enclosure with elevating bracket(s), wall bracket (1); MH86D9VWP/MH92D9VWP use elevating brackets and studs (repositioned for NF)	A	S602 Kit Contents p.5, pp.14-20; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	exact dimensions		

EDH-SQD-00666	MH68WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 68 in H (NQ/NF)

OEM part number	MH68WP	A	S601 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 68 in	A	S601, S27, S609 oem_spec
Kit contents	Weatherproof enclosure (1), wall bracket (1), locking handle (1), locking handle gasket (1), 8-32 x 5/16 in SEMS screws (2), latch plate (1), 3/8 in lock washer (1), 3/8-16 hex nut (1)	A	S601 p.2 table; oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	S601, S27, S609 oem_spec
Torque values	Handle SEMS screws 24-35 lb-in (2.7-4.0 N-m); handle hex nut 50-70 lb-in (5.6-7.9 N-m); Type 5/12 Square D conduit hubs H050..H0400 (CP = chrome) 66-133 lb-ft	A	S601 oem_spec
OEM instruction document	80043-771-01 (03/2009) (replaces 80043-455-04); MH26WP-MH56WP ship with door clipped shut; Type 3R must be bottom fed; 400-600 A in 44 in enclosures has special cover-trim step	A	S601, S27 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00647	MH74	Square D	box/enclosure	STATUS UNKNOWN

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 74 in H

OEM part number	MH74	A	S27 Digest Sec.9 Table 9.3 / NF Table 9.70; 2009 Digest 13-10/13-11/13-13; oem_spec
Alternate / superseded numbers	MH74BE ('BE' suffix = blank endwalls at both ends of NEMA 1 enclosure (standard box has one blank endwall and one with knockouts))	A	S27 alias; Table 9.3 note [9]; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 74 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S27, S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 74 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00138	MH74D9	Square D	box/enclosure	CURRENT (LISTED IN 202

MH box, 20 in. W x 8.75 in. D x 74 in. H (D9, for PowerPacT L)

OEM part number	MH74D9	A	S27 oem_spec
Description	NEMA 1 MH enclosure, 8.75 in. deep (D9 suffix) required for NQ/NF with PowerPacT L main, switch or sub-feed breaker; both endwalls blank	A	S27 p. 9-9 fn, 9-31 fn; oem_spec
Dimensions	20 in. W x 8.75 in. D; height 74 in. (box catalog number = height)	A	S27 p. 9-9/9-10; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-9; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00677	MH74D9VWP	Square D	box/enclosure	STATUS UNKNOWN

MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 74 in H

OEM part number	MH74D9VWP	A	S602 80043-850-01; Digest Table 9.3 note [13]; oem_spec
Description	Vented Type 3R enclosure with three-point latch door, 26 in W x 8.75 in D; required for outdoor NQ/NF with two sub-feed breakers or sub-feed breaker >150 A, and for PowerPacT L main/sub-feed; must be bottom fed (select NQ12RDE kit)	A	S602, S27 oem_spec
Kit contents	Enclosure with elevating bracket(s), wall bracket (1); MH86D9VWP/MH92D9VWP use elevating brackets and studs (repositioned for NF)	A	S602 Kit Contents p.5, pp.14-20; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	exact dimensions		

EDH-SQD-00667	MH74WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 74 in H (NQ/NF)

OEM part number	MH74WP	A	S601 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 74 in	A	S601, S27, S609 oem_spec
Kit contents	Weatherproof enclosure (1), wall bracket (1), locking handle (1), locking handle gasket (1), 8-32 x 5/16 in SEMS screws (2), latch plate (1), 3/8 in lock washer (1), 3/8-16 hex nut (1)	A	S601 p.2 table; oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	S601, S27, S609 oem_spec
Torque values	Handle SEMS screws 24-35 lb-in (2.7-4.0 N-m); handle hex nut 50-70 lb-in (5.6-7.9 N-m); Type 5/12 Square D conduit hubs H050..H0400 (CP = chrome) 66-133 lb-ft	A	S601 oem_spec
OEM instruction document	80043-771-01 (03/2009) (replaces 80043-455-04); MH26WP-MH56WP ship with door clipped shut; Type 3R must be bottom fed; 400-600 A in 44 in enclosures has special cover-trim step	A	S601, S27 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00649	MH80	Square D	box/enclosure	STATUS UNKNOWN

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 80 in H

OEM part number	MH80	A	S27 Digest Sec.9 Table 9.3 / NF Table 9.70; oem_spec
Alternate / superseded numbers	MH80BE ('BE' suffix = blank endwalls at both ends of NEMA 1 enclosure (standard box has one blank endwall and one with knockouts))	A	S27 alias; Table 9.3 note [9]; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 80 in high; galvanized steel with removable endwalls; used for NQ/NF panelboards	A	S27 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 80 in H (nominal; detailed dims per PBA600 / PBA711 drawings)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00139	MH80D9	Square D	box/enclosure	CURRENT (LISTED IN 202

MH box, 20 in. W x 8.75 in. D x 80 in. H (D9, for PowerPacT L)

OEM part number	MH80D9	A	S27 oem_spec
Description	NEMA 1 MH enclosure, 8.75 in. deep (D9 suffix) required for NQ/NF with PowerPacT L main, switch or sub-feed breaker; both endwalls blank	A	S27 p. 9-9 fn, 9-31 fn; oem_spec
Dimensions	20 in. W x 8.75 in. D; height 80 in. (box catalog number = height)	A	S27 p. 9-9/9-10; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-9; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00678	MH80D9VWP	Square D	box/enclosure	STATUS UNKNOWN

MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 80 in H

OEM part number	MH80D9VWP	A	S602 80043-850-01; Digest Table 9.3 note [13]; oem_spec
Description	Vented Type 3R enclosure with three-point latch door, 26 in W x 8.75 in D; required for outdoor NQ/NF with two sub-feed breakers or sub-feed breaker >150 A, and for PowerPacT L main/sub-feed; must be bottom fed (select NQ12RDE kit)	A	S602, S27 oem_spec
Kit contents	Enclosure with elevating bracket(s), wall bracket (1); MH86D9VWP/MH92D9VWP use elevating brackets and studs (repositioned for NF)	A	S602 Kit Contents p.5, pp.14-20; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	exact dimensions		

EDH-SQD-00669	MH80WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 80 in H (NQ/NF)

OEM part number	MH80WP	A	S601 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF panelboards; nominal height 80 in	A	S601, S27 oem_spec
Kit contents	Weatherproof enclosure (1), wall bracket (1), locking handle (1), locking handle gasket (1), 8-32 x 5/16 in SEMS screws (2), latch plate (1), 3/8 in lock washer (1), 3/8-16 hex nut (1)	A	S601 p.2 table; oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	S601, S27 oem_spec
Torque values	Handle SEMS screws 24-35 lb-in (2.7-4.0 N-m); handle hex nut 50-70 lb-in (5.6-7.9 N-m); Type 5/12 Square D conduit hubs H050..H0400 (CP = chrome) 66-133 lb-ft	A	S601 oem_spec
OEM instruction document	80043-771-01 (03/2009) (replaces 80043-455-04); MH26WP-MH56WP ship with door clipped shut; Type 3R must be bottom fed; 400-600 A in 44 in enclosures has special cover-trim step	A	S601, S27 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00650	MH86	Square D	box/enclosure	STATUS UNKNOWN

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 86 in H

OEM part number	MH86	A	S27 Digest Sec.9 Table 9.3 / NF Table 9.70; oem_spec
Alternate / superseded numbers	MH86BE ('BE' suffix = blank endwalls at both ends of NEMA 1 enclosure (standard box has one blank endwall and one with knockouts))	A	S27 alias; Table 9.3 note [9]; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 86 in high; galvanized steel with removable endwalls; used for NQ/NF panelboards	A	S27 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 86 in H (nominal; detailed dims per PBA600 / PBA711 drawings)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00140	MH86D9	Square D	box/enclosure	CURRENT (LISTED IN 202

MH box, 20 in. W x 8.75 in. D x 86 in. H (D9, for PowerPacT L)

OEM part number	MH86D9	A	S27 oem_spec
Description	NEMA 1 MH enclosure, 8.75 in. deep (D9 suffix) required for NQ/NF with PowerPacT L main, switch or sub-feed breaker; both endwalls blank	A	S27 p. 9-9 fn, 9-31 fn; oem_spec
Dimensions	20 in. W x 8.75 in. D; height 86 in. (box catalog number = height)	A	S27 p. 9-9/9-10; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-9; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00679	MH86D9VWP	Square D	box/enclosure	STATUS UNKNOWN

MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 86 in H

OEM part number	MH86D9VWP	A	S602 80043-850-01; Digest Table 9.3 note [13]; oem_spec
Description	Vented Type 3R enclosure with three-point latch door, 26 in W x 8.75 in D; required for outdoor NQ/NF with two sub-feed breakers or sub-feed breaker >150 A, and for PowerPacT L main/sub-feed; must be bottom fed (select NQ12RDE kit)	A	S602, S27 oem_spec
Kit contents	Enclosure with elevating bracket(s), wall bracket (1); MH86D9VWP/MH92D9VWP use elevating brackets and studs (repositioned for NF)	A	S602 Kit Contents p.5, pp.14-20; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	exact dimensions		

EDH-SQD-00670	MH86WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 86 in H (NQ/NF)

OEM part number	MH86WP	A	S601 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF panelboards; nominal height 86 in	A	S601, S27 oem_spec
Kit contents	Weatherproof enclosure (1), wall bracket (1), locking handle (1), locking handle gasket (1), 8-32 x 5/16 in SEMS screws (2), latch plate (1), 3/8 in lock washer (1), 3/8-16 hex nut (1)	A	S601 p.2 table; oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	S601, S27 oem_spec
Torque values	Handle SEMS screws 24-35 lb-in (2.7-4.0 N-m); handle hex nut 50-70 lb-in (5.6-7.9 N-m); Type 5/12 Square D conduit hubs H050..H0400 (CP = chrome) 66-133 lb-ft	A	S601 oem_spec
OEM instruction document	80043-771-01 (03/2009) (replaces 80043-455-04); MH26WP-MH56WP ship with door clipped shut; Type 3R must be bottom fed; 400-600 A in 44 in enclosures has special cover-trim step	A	S601, S27 oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00651	MH92	Square D	box/enclosure	STATUS UNKNOWN

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 92 in H

OEM part number	MH92	A	S27 Digest Sec.9 Table 9.3 / NF Table 9.70; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 92 in high; galvanized steel with removable endwalls; used for NQ/NF panelboards	A	S27 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 92 in H (nominal; detailed dims per PBA600 / PBA711 drawings)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00141	MH92D9	Square D	box/enclosure	CURRENT (LISTED IN 202

MH box, 20 in. W x 8.75 in. D x 92 in. H (D9, for PowerPacT L)

OEM part number	MH92D9	A	S27 oem_spec
Description	NEMA 1 MH enclosure, 8.75 in. deep (D9 suffix) required for NQ/NF with PowerPacT L main, switch or sub-feed breaker; both endwalls blank	A	S27 p. 9-9 fn, 9-31 fn; oem_spec
Dimensions	20 in. W x 8.75 in. D; height 92 in. (box catalog number = height)	B	S27 p. 9-9/9-10; oem_spec
Status	current (listed in 2026 Digest)	A	S27 p. 9-9; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00680	MH92D9VWP	Square D	box/enclosure	STATUS UNKNOWN

MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 92 in H

OEM part number	MH92D9VWP	A	S602 80043-850-01; Digest Table 9.3 note [13]; oem_spec
Description	Vented Type 3R enclosure with three-point latch door, 26 in W x 8.75 in D; required for outdoor NQ/NF with two sub-feed breakers or sub-feed breaker >150 A, and for PowerPacT L main/sub-feed; must be bottom fed (select NQ12RDE kit)	A	S602, S27 oem_spec
Kit contents	Enclosure with elevating bracket(s), wall bracket (1); MH86D9VWP/MH92D9VWP use elevating brackets and studs (repositioned for NF)	A	S602 Kit Contents p.5, pp.14-20; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	exact dimensions		

EDH-SQD-00132	MHBE20	Square D	box/enclosure	CURRENT (LISTED IN 202

Blank endwall for 20 in. wide MH enclosure (one per package)

OEM part number	MHBE20	A	S27 oem_spec
Description	Blank endwall for 20 in. wide MH enclosure (one per package)	A	S27 p. 9-19; oem_spec
Installation location	Top/bottom end of MH box	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00135	MHBE26	Square D	box/enclosure	CURRENT (LISTED IN 202

Blank endwall, 26 in. wide MH enclosure (one per package)

OEM part number	MHBE26	A	S27 oem_spec
Description	Blank endwall, 26 in. wide MH enclosure (one per package)	A	S27 p. 9-19; oem_spec
Installation location	Top/bottom end of MH box	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00134	MHCO20	Square D	box/enclosure	CURRENT (LISTED IN 202

NF/NQ rectangular cutout endwall kit for 20 in. wide NEMA 1 MH enclosure

OEM part number	MHCO20	A	S27 oem_spec
Description	NF/NQ rectangular cutout endwall kit for 20 in. wide NEMA 1 MH enclosure	A	S27 p. 9-19; oem_spec
Installation location	Top/bottom end of MH box	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00603	MHCOEW20A	Square D	box/enclosure	STATUS UNKNOWN

Endwall and closing plate replacement kit, 20 in MH enclosure (NQ/NF)

OEM part number	MHCOEW20A	A	S599 80043-773-01 Kit Contents; oem_spec
Description	Endwall and closing plate replacement kit for NQ or NF panelboard enclosure; replaces existing endwall (reuses its five 10-32 screws)	A	S599 oem_spec
Kit contents	(1) endwall, (1) closing plate, (4) 10-32 x 7/16 in self-tapping screws	A	same as above
OEM instruction document	80043-773-01 (04/2009), replaces 80043-678-02	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	difference between A and F suffix		
Open question	*What distinguishes MHCOEW20A from MHCOEW20F (aluminum vs. finish? closing-plate cutout?)*		

EDH-SQD-00604	MHCOEW20F	Square D	box/enclosure	STATUS UNKNOWN

Endwall and closing plate replacement kit, 20 in MH enclosure (NQ/NF)

OEM part number	MHCOEW20F	A	S599 80043-773-01 Kit Contents; oem_spec
Description	Endwall and closing plate replacement kit for NQ or NF panelboard enclosure; replaces existing endwall (reuses its five 10-32 screws)	A	S599 oem_spec
Kit contents	(1) endwall, (1) closing plate, (4) 10-32 x 7/16 in self-tapping screws	A	same as above
OEM instruction document	80043-773-01 (04/2009), replaces 80043-678-02	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	difference between A and F suffix		
Open question	*What distinguishes MHCOEW20A from MHCOEW20F (aluminum vs. finish? closing-plate cutout?)*		

EDH-SQD-00133	MHKE20	Square D	box/enclosure	CURRENT (LISTED IN 202

Endwall with knockouts for 20 in. wide MH enclosure (one per package)

OEM part number	MHKE20	A	S27 oem_spec
Description	Endwall with knockouts for 20 in. wide MH enclosure (one per package)	A	S27 p. 9-19; oem_spec
Installation location	Top/bottom end of MH box	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00715	MPX81542	Square D	box/enclosure	STATUS UNKNOWN

Pull box with solid neutral, 42 terminals, column-width NQ/NF

OEM part number	MPX81542	A	S27 Tables 9.87 / 9.89; oem_spec
Description	Pull box with solid neutral, 42 S/N terminals, for column-width panelboards	A	S27 oem_spec
Cross-links	Families: NQ, NF		

EDH-SQD-00707	MTX836	Square D	box/enclosure	STATUS UNKNOWN

Cable trough 36 in for NQ column-width panelboard

OEM part number	MTX836	A	S27 Digest Sec.9 Tables 9.87 / 9.89; oem_spec
Description	Cable trough, length 36 in, cross-section 8.625 x 5 in, standard with trough barrier, for single-row (column width) panelboards	A	S27 oem_spec
Cross-links	Families: NQ		

EDH-SQD-00708	MTX848	Square D	box/enclosure	STATUS UNKNOWN

Cable trough 48 in for NQ column-width panelboard

OEM part number	MTX848	A	S27 Digest Sec.9 Tables 9.87 / 9.89; oem_spec
Description	Cable trough, length 48 in, cross-section 8.625 x 5 in, standard with trough barrier, for single-row (column width) panelboards	A	S27 oem_spec
Cross-links	Families: NQ		

EDH-SQD-00709	MTX856	Square D	box/enclosure	STATUS UNKNOWN

Cable trough 56 in for NQ column-width panelboard

OEM part number	MTX856	A	S27 Digest Sec.9 Tables 9.87 / 9.89; oem_spec
Description	Cable trough, length 56 in, cross-section 8.625 x 5 in, standard with trough barrier, for single-row (column width) panelboards	A	S27 oem_spec
Cross-links	Families: NQ		

EDH-SQD-00710	MTX866	Square D	box/enclosure	STATUS UNKNOWN

Cable trough 66 in for NQ column-width panelboard

OEM part number	MTX866	A	S27 Digest Sec.9 Tables 9.87 / 9.89; oem_spec
Description	Cable trough, length 66 in, cross-section 8.625 x 5 in, standard with trough barrier, for single-row (column width) panelboards	A	S27 oem_spec
Cross-links	Families: NQ		

EDH-SQD-00739	NQB532	Square D	box/enclosure	STATUS UNKNOWN

14 in wide panelboard box, 14 in W x 5.75 in D x 32 in H (NQ14 / NQOD 14 in)

OEM part number	NQB532	A	S27 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Description	NEMA 1 box 14 in W x 5.75 in D, 32 in high; 14 in wide cabinets accept 100 A max branch breakers; all 14 in W boxes come with blank endwalls (2026 Digest note [61]); through-feed lugs not available in 14 in enclosures	A	S27, S609 oem_spec
Dimensions	14 in W x 5.75 in D x 32 in H (nominal)	A	same as above
Cross-links	Families: NQ, NQOD		

EDH-SQD-00741	NQB538	Square D	box/enclosure	STATUS UNKNOWN

14 in wide panelboard box, 14 in W x 5.75 in D x 38 in H (NQ14 / NQOD 14 in)

OEM part number	NQB538	A	S27 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Description	NEMA 1 box 14 in W x 5.75 in D, 38 in high; 14 in wide cabinets accept 100 A max branch breakers; all 14 in W boxes come with blank endwalls (2026 Digest note [61]); through-feed lugs not available in 14 in enclosures	A	S27 oem_spec
Dimensions	14 in W x 5.75 in D x 38 in H (nominal)	A	same as above
Cross-links	Families: NQ		

EDH-SQD-00743	NQB544	Square D	box/enclosure	STATUS UNKNOWN

14 in wide panelboard box, 14 in W x 5.75 in D x 44 in H (NQ14 / NQOD 14 in)

OEM part number	NQB544	A	S27 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Description	NEMA 1 box 14 in W x 5.75 in D, 44 in high; 14 in wide cabinets accept 100 A max branch breakers; all 14 in W boxes come with blank endwalls (2026 Digest note [61]); through-feed lugs not available in 14 in enclosures	A	S27, S609 oem_spec
Dimensions	14 in W x 5.75 in D x 44 in H (nominal)	A	same as above
Cross-links	Families: NQ, NQOD		

EDH-SQD-00744	NQB550	Square D	box/enclosure	STATUS UNKNOWN

14 in wide panelboard box, 14 in W x 5.75 in D x 50 in H (NQ14 / NQOD 14 in)

OEM part number	NQB550	A	S27 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Description	NEMA 1 box 14 in W x 5.75 in D, 50 in high; 14 in wide cabinets accept 100 A max branch breakers; all 14 in W boxes come with blank endwalls (2026 Digest note [61]); through-feed lugs not available in 14 in enclosures	A	S27, S609 oem_spec
Dimensions	14 in W x 5.75 in D x 50 in H (nominal)	A	same as above
Cross-links	Families: NQ, NQOD		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00935	**QO2DTIM**	Square D QO2DTI interlock with retaining kits for back-fed breakers	QO in QO816L100 load centers **A**	unknown
EDH-SQD-00586	**QOBRT**	QOB breaker removal kit (Enhanced IP2X NQ)	—	unknown
EDH-SQD-00121	**S37444**	Three-terminal (nut) kit for H-frame main breaker hard-bus connection	HD/HG/HJ/HL **A**	unknown
EDH-SQD-00122	**S37445**	Three-terminal (nut) kit for J-frame main breaker hard-bus connection	JD/JG/JJ/JL **A**	unknown
EDH-SQD-00131	**TBPANEL**	NQ & NF tackle box spare parts kit	—	current (listed in 2026 Digest)

EDH-SQD-00935	QO2DTIM	Square D	hardware-kit	STATUS UNKNOWN

Square D QO2DTI interlock with retaining kits for back-fed breakers

OEM part number	QO2DTIM	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	QO2DTI mechanical interlock attachment with retaining kits for securing two adjacent back-fed circuit breakers in dual power supply applications; (2) 2P or (1) 2P + (1) 1P QO in QO816L100 load centers.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QO in QO816L100 load centers	A	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		
Open question	*Is QO2DTIM listed for NQ/NQOD panelboard back-fed applications or load centers only?*		

EDH-SQD-00586	QOBRT	Square D	hardware-kit	STATUS UNKNOWN

QOB breaker removal kit (Enhanced IP2X NQ)

OEM part number	QOBRT	A	S590 1640BR1701 Replacement parts table; oem_spec
Description	QOB Breaker Removal Kit, 1 per package; footnote 4 ties it (with QO1PJ15 jaw kit) to the Enhanced IP2X design	A	S590 oem_spec
Application	accessory	A	same as above
Cross-links	Families: NQ · Breakers: QOB (bolt-on)		
Not yet documented	description of tool, Kit contents		
Open question	*What does QOBRT physically contain (tool vs. replacement clips)?*		

EDH-SQD-00121	S37444	Square D	hardware-kit	UNKNOWN

Three-terminal (nut) kit for H-frame main breaker hard-bus connection

OEM part number	S37444	A	S37, S180 oem_spec
Description	Terminal kit inserted into H-frame breaker to accept hard-bus connectors (replaces breaker lugs)	A	S37 oem_spec
	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	S180 p.125, Table 124; oem_spec
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	HD/HG/HJ/HL	A	same as above
Kit contents	Supplied inside NQMB2HJ/N150MH/N250MJ kits; also referenced by NQOD main kit and QMBHW/QMBJW	A	S37, S61, S34, S83 oem_spec
	3 per kit	A	S180 p.125, Table 124; oem_spec
Fasteners	tap 1/4-20; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
	Per terminal kit instruction sheet (not in parent bulletins)	D	oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: NQ, NQOD, NF, QMB · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR), Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SQD-00122	S37445	Square D	hardware-kit	UNKNOWN

Three-terminal (nut) kit for J-frame main breaker hard-bus connection

OEM part number	S37445	A	S37, S180 oem_spec
Description	Terminal kit inserted into J-frame breaker to accept hard-bus connectors (replaces breaker lugs)	A	S37 oem_spec
	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	S180 p.125, Table 124; oem_spec
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	JD/JG/JJ/JL	A	same as above
Kit contents	Supplied inside NQMB2HJ/N150MH/N250MJ kits; also referenced by NQOD main kit and QMBHW/QMBJW	A	S37, S61, S34, S83 oem_spec
	3 per kit	A	S180 p.125, Table 124; oem_spec
Fasteners	tap 1/4-20; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
	Per terminal kit instruction sheet (not in parent bulletins)	D	oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: NQ, NQOD, NF, QMB · Breakers: PowerPacT J-frame (JD/JG/JJ/JL/JR), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SQD-00131	TBPANEL	Square D	hardware-kit	CURRENT (LISTED IN 202

NQ & NF tackle box spare parts kit

OEM part number	TBPANEL	A	S27 oem_spec
Description	NQ & NF Tackle Box Spare Parts Kit (replacement part kit)	A	S27 p. 9-19; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Contents of TBPANEL not listed in Digest - obtain*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00602	**LP9503**	Quarter-turn fastener kit for NQ/NF/I-Line hinged trim fronts	—	unknown

EDH-SQD-00602	LP9503	Square D	fastener	STATUS UNKNOWN

Quarter-turn fastener kit for NQ/NF/I-Line hinged trim fronts

OEM part number	LP9503	A	S598 80043-772-01 Kit Contents; oem_spec
Description	Quarter-turn fasteners kit for NQ, NF or I-Line panelboard enclosure trim fronts (installed on side opposite the trim hinge)	A	S598 oem_spec
Kit contents	(4) quarter-turn fastener assemblies (fastener, external ring, mounting nut, cam, cam screw)	A	same as above
Torque values	Mounting nut 105 lb-in (11.9 N-m); cam screw 52 lb-in (5.9 N-m)	A	S598 steps 4, 6; oem_spec
OEM instruction document	80043-772-01 (04/2009), replaces 80043-450-03	A	S598 oem_spec
Identification features	External rings are NOT installed on I-Line enclosures	A	S598 step 4 note; oem_spec
Cross-links	Families: NQ, NF, I-LINE		
Not yet documented	Dimensions		

Spd Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00619	**SSP01SBA08D**	Surgelogic SurgeLoc plug-on SPD, 120/240 V, 80 kA (NQ)	—	unknown
EDH-SQD-00620	**SSP01SBA10D**	Surgelogic SurgeLoc plug-on SPD, 120/240 V, 100 kA (NQ)	—	unknown
EDH-SQD-00621	**SSP01SBA12D**	Surgelogic SurgeLoc plug-on SPD, 120/240 V, 120 kA (NQ)	—	unknown
EDH-SQD-00622	**SSP01SBA16D**	Surgelogic SurgeLoc plug-on SPD, 120/240 V, 160 kA (NQ)	—	unknown
EDH-SQD-00623	**SSP01SBA20D**	Surgelogic SurgeLoc plug-on SPD, 120/240 V, 200 kA (NQ)	—	unknown
EDH-SQD-00624	**SSP01SBA24D**	Surgelogic SurgeLoc plug-on SPD, 120/240 V, 240 kA (NQ)	—	unknown
EDH-SQD-00625	**SSP02SBA08D**	Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 80 kA (NQ)	—	unknown
EDH-SQD-00626	**SSP02SBA10D**	Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 100 kA (NQ)	—	unknown
EDH-SQD-00627	**SSP02SBA12D**	Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 120 kA (NQ)	—	unknown
EDH-SQD-00628	**SSP02SBA16D**	Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 160 kA (NQ)	—	unknown
EDH-SQD-00629	**SSP02SBA20D**	Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 200 kA (NQ)	—	unknown
EDH-SQD-00630	**SSP02SBA24D**	Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 240 kA (NQ)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00631	**SSP03SBA24D**	Surgelogic SurgeLoc plug-on SPD, 240/120 V high-leg delta, 240 kA (NQ)	—	unknown

EDH-SQD-00619	SSP01SBA08D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 120/240 V, 80 kA (NQ)

OEM part number	SSP01SBA08D	A	S27 Digest Sec.9 Table 9.36 p.9-19; brochure spec table; oem_spec
Description	Surgelogic SurgeLoc plug-on surge protective device for NQ panelboards, 120/240 V, surge current rating 80 kA; UL 1449 4th Ed. Type 1 SPD	A	S27, S608 oem_spec
Installation location	Plugs onto NQ interior bus; requires six breaker spaces on each side (12 total)	A	S608 oem_spec
Voltage rating	120/240 V	A	S27, S608 oem_spec
Current rating	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 6 modes of protection	A	S608 oem_spec
OEM instruction document	Factory- or field-installable; 96-space interiors available factory assembled when SurgeLoc is installed in 84-circuit NQ	A	S608, S27 Table 9.36 note [108]; oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, weight		

EDH-SQD-00620	SSP01SBA10D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 120/240 V, 100 kA (NQ)

OEM part number	SSP01SBA10D	A	S27 Digest Sec.9 Table 9.36 p.9-19; brochure spec table; oem_spec
Description	Surgelogic SurgeLoc plug-on surge protective device for NQ panelboards, 120/240 V, surge current rating 100 kA; UL 1449 4th Ed. Type 1 SPD	A	S27, S608 oem_spec
Installation location	Plugs onto NQ interior bus; requires six breaker spaces on each side (12 total)	A	S608 oem_spec
Voltage rating	120/240 V	A	S27, S608 oem_spec
Current rating	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 6 modes of protection	A	S608 oem_spec
OEM instruction document	Factory- or field-installable; 96-space interiors available factory assembled when SurgeLoc is installed in 84-circuit NQ	A	S608, S27 Table 9.36 note [108]; oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, weight		

EDH-SQD-00621	SSP01SBA12D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 120/240 V, 120 kA (NQ)

OEM part number	SSP01SBA12D	A	S27 Digest Sec.9 Table 9.36 p.9-19; brochure spec table; oem_spec
Description	Surgelogic SurgeLoc plug-on surge protective device for NQ panelboards, 120/240 V, surge current rating 120 kA; UL 1449 4th Ed. Type 1 SPD	A	S27, S608 oem_spec
Installation location	Plugs onto NQ interior bus; requires six breaker spaces on each side (12 total)	A	S608 oem_spec
Voltage rating	120/240 V	A	S27, S608 oem_spec
Current rating	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 6 modes of protection	A	S608 oem_spec
OEM instruction document	Factory- or field-installable; 96-space interiors available factory assembled when SurgeLoc is installed in 84-circuit NQ	A	S608, S27 Table 9.36 note [108]; oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, weight		

EDH-SQD-00622	SSP01SBA16D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 120/240 V, 160 kA (NQ)

OEM part number	SSP01SBA16D	A	S27 Digest Sec.9 Table 9.36 p.9-19; brochure spec table; oem_spec
Description	Surgelogic SurgeLoc plug-on surge protective device for NQ panelboards, 120/240 V, surge current rating 160 kA; UL 1449 4th Ed. Type 1 SPD	A	S27, S608 oem_spec
Installation location	Plugs onto NQ interior bus; requires six breaker spaces on each side (12 total)	A	S608 oem_spec
Voltage rating	120/240 V	A	S27, S608 oem_spec
Current rating	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 6 modes of protection	A	S608 oem_spec
OEM instruction document	Factory- or field-installable; 96-space interiors available factory assembled when SurgeLoc is installed in 84-circuit NQ	A	S608, S27 Table 9.36 note [108]; oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, weight		

EDH-SQD-00623	SSP01SBA20D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 120/240 V, 200 kA (NQ)

OEM part number	SSP01SBA20D	A	S27 Digest Sec.9 Table 9.36 p.9-19; brochure spec table; oem_spec
Description	Surgelogic SurgeLoc plug-on surge protective device for NQ panelboards, 120/240 V, surge current rating 200 kA; UL 1449 4th Ed. Type 1 SPD	A	S27, S608 oem_spec
Installation location	Plugs onto NQ interior bus; requires six breaker spaces on each side (12 total)	A	S608 oem_spec
Voltage rating	120/240 V	A	S27, S608 oem_spec
Current rating	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 6 modes of protection	A	S608 oem_spec
OEM instruction document	Factory- or field-installable; 96-space interiors available factory assembled when SurgeLoc is installed in 84-circuit NQ	A	S608, S27 Table 9.36 note [108]; oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, weight		

EDH-SQD-00624	SSP01SBA24D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 120/240 V, 240 kA (NQ)

OEM part number	SSP01SBA24D	A	S27 Digest Sec.9 Table 9.36 p.9-19; brochure spec table; oem_spec
Description	Surgelogic SurgeLoc plug-on surge protective device for NQ panelboards, 120/240 V, surge current rating 240 kA; UL 1449 4th Ed. Type 1 SPD	A	S27, S608 oem_spec
Installation location	Plugs onto NQ interior bus; requires six breaker spaces on each side (12 total)	A	S608 oem_spec
Voltage rating	120/240 V	A	S27, S608 oem_spec
Current rating	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 6 modes of protection	A	S608 oem_spec
OEM instruction document	Factory- or field-installable; 96-space interiors available factory assembled when SurgeLoc is installed in 84-circuit NQ	A	S608, S27 Table 9.36 note [108]; oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, weight		

EDH-SQD-00625	SSP02SBA08D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 80 kA (NQ)

OEM part number	SSP02SBA08D	A	S27 Digest Sec.9 Table 9.36 p.9-19; brochure spec table; oem_spec
Description	Surgelogic SurgeLoc plug-on surge protective device for NQ panelboards, 208Y/120 V, surge current rating 80 kA; UL 1449 4th Ed. Type 1 SPD	A	S27, S608 oem_spec
Installation location	Plugs onto NQ interior bus; requires six breaker spaces on each side (12 total)	A	S608 oem_spec
Voltage rating	208Y/120 V	A	S27, S608 oem_spec
Current rating	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 10 modes of protection	A	S608 oem_spec
OEM instruction document	Factory- or field-installable; 96-space interiors available factory assembled when SurgeLoc is installed in 84-circuit NQ	A	S608, S27 Table 9.36 note [108]; oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, weight		

EDH-SQD-00626	SSP02SBA10D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 100 kA (NQ)

OEM part number	SSP02SBA10D	A	S27 Digest Sec.9 Table 9.36 p.9-19; brochure spec table; oem_spec
Description	Surgelogic SurgeLoc plug-on surge protective device for NQ panelboards, 208Y/120 V, surge current rating 100 kA; UL 1449 4th Ed. Type 1 SPD	A	S27, S608 oem_spec
Installation location	Plugs onto NQ interior bus; requires six breaker spaces on each side (12 total)	A	S608 oem_spec
Voltage rating	208Y/120 V	A	S27, S608 oem_spec
Current rating	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 10 modes of protection	A	S608 oem_spec
OEM instruction document	Factory- or field-installable; 96-space interiors available factory assembled when SurgeLoc is installed in 84-circuit NQ	A	S608, S27 Table 9.36 note [108]; oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, weight		

EDH-SQD-00627	SSP02SBA12D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 120 kA (NQ)

OEM part number	SSP02SBA12D	A	S27 Digest Sec.9 Table 9.36 p.9-19; brochure spec table; oem_spec
Description	Surgelogic SurgeLoc plug-on surge protective device for NQ panelboards, 208Y/120 V, surge current rating 120 kA; UL 1449 4th Ed. Type 1 SPD	A	S27, S608 oem_spec
Installation location	Plugs onto NQ interior bus; requires six breaker spaces on each side (12 total)	A	S608 oem_spec
Voltage rating	208Y/120 V	A	S27, S608 oem_spec
Current rating	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 10 modes of protection	A	S608 oem_spec
OEM instruction document	Factory- or field-installable; 96-space interiors available factory assembled when SurgeLoc is installed in 84-circuit NQ	A	S608, S27 Table 9.36 note [108]; oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, weight		

EDH-SQD-00628	SSP02SBA16D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 160 kA (NQ)

OEM part number	SSP02SBA16D	A	S27 Digest Sec.9 Table 9.36 p.9-19; brochure spec table; oem_spec
Description	Surgelogic SurgeLoc plug-on surge protective device for NQ panelboards, 208Y/120 V, surge current rating 160 kA; UL 1449 4th Ed. Type 1 SPD	A	S27, S608 oem_spec
Installation location	Plugs onto NQ interior bus; requires six breaker spaces on each side (12 total)	A	S608 oem_spec
Voltage rating	208Y/120 V	A	S27, S608 oem_spec
Current rating	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 10 modes of protection	A	S608 oem_spec
OEM instruction document	Factory- or field-installable; 96-space interiors available factory assembled when SurgeLoc is installed in 84-circuit NQ	A	S608, S27 Table 9.36 note [108]; oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, weight		

EDH-SQD-00629	SSP02SBA20D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 200 kA (NQ)

OEM part number	SSP02SBA20D	A	S27 Digest Sec.9 Table 9.36 p.9-19; brochure spec table; oem_spec
Description	Surgelogic SurgeLoc plug-on surge protective device for NQ panelboards, 208Y/120 V, surge current rating 200 kA; UL 1449 4th Ed. Type 1 SPD	A	S27, S608 oem_spec
Installation location	Plugs onto NQ interior bus; requires six breaker spaces on each side (12 total)	A	S608 oem_spec
Voltage rating	208Y/120 V	A	S27, S608 oem_spec
Current rating	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 10 modes of protection	A	S608 oem_spec
OEM instruction document	Factory- or field-installable; 96-space interiors available factory assembled when SurgeLoc is installed in 84-circuit NQ	A	S608, S27 Table 9.36 note [108]; oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, weight		

EDH-SQD-00630	SSP02SBA24D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 240 kA (NQ)

OEM part number	SSP02SBA24D	A	S27 Digest Sec.9 Table 9.36 p.9-19; brochure spec table; oem_spec
Description	Surgelogic SurgeLoc plug-on surge protective device for NQ panelboards, 208Y/120 V, surge current rating 240 kA; UL 1449 4th Ed. Type 1 SPD	A	S27, S608 oem_spec
Installation location	Plugs onto NQ interior bus; requires six breaker spaces on each side (12 total)	A	S608 oem_spec
Voltage rating	208Y/120 V	A	S27, S608 oem_spec
Current rating	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 10 modes of protection	A	S608 oem_spec
OEM instruction document	Factory- or field-installable; 96-space interiors available factory assembled when SurgeLoc is installed in 84-circuit NQ	A	S608, S27 Table 9.36 note [108]; oem_spec
Cross-links	Families: NQ		
Not yet documented	Dimensions, weight		

EDH-SQD-00631	SSP03SBA24D	Square D	spd-kit	STATUS UNKNOWN

Surgelogic SurgeLoc plug-on SPD, 240/120 V high-leg delta, 240 kA (NQ)

OEM part number	SSP03SBA24D	A	S27 Digest Sec.9 Table 9.36; oem_spec
Description	SurgeLoc plug-on SPD, 240/120 Vac high leg delta, 240 kA	A	S27 oem_spec
Voltage rating	240/120 Vac high-leg delta	A	same as above
Cross-links	Families: NQ		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00541	**QO-1HT**	Square D handle tie for QO / QOB (two 1-pole to 2-pole individual trip)	Two adjacent 1P QO/QOB 120/240 Vac breakers A	1970 catalog item; current status unknown
EDH-SQD-00044	**QO1PJ15**	Jaw accessory kit for QOB breaker on NQ (fingersafe IP2X)	—	current (referenced in fingersafe bulletins)
EDH-SQD-00934	**QO2DTI**	Square D QO mechanical interlock attachment (two 2P or 2P+1P side by side)	QO, Q1 (not QOU) A	unknown

EDH-SQD-00541	QO-1HT	Square D	breaker-accessory	1970 CATALOG ITEM; CUR

Square D handle tie for QO / QOB (two 1-pole to 2-pole individual trip)

OEM part number	QO-1HT	A	S463, S638 oem_spec
Description	Handle Tie (QO or QOB) - permits conversion of two single pole breakers to double pole, individual trip; $0.20	A	S463 Digest 152 (1970) p.84; oem_spec
	Handle tie: converts any two adjacent 120/240 Vac 1P QO circuit breakers to independent trip 2P.	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Application	accessory	A	same as above
Breaker compatibility	Two adjacent 1P QO/QOB 120/240 Vac breakers	A	same as above
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00044	QO1PJ15	Square D	breaker-accessory	CURRENT (REFERENCED IN

Jaw accessory kit for QOB breaker on NQ (fingersafe IP2X)

OEM part number	QO1PJ15	A	S71, S590 oem_spec
Description	Jaw accessory kit allowing QOB bolt-on breakers to plug onto NQ interiors with IP2X barriers	A	S71, S27 p. 9-20; oem_spec
	QOB Jaw Kit, 15 per package; allows bolt-on QOB branch breakers to plug onto NQ interior with IP2X barriers; QOB breakers and jaw kits required for Enhanced IP2X design	A	S590 oem_spec
Application	branch	A	S71 oem_spec
Kit contents	15 jaw kits per package	A	S590 oem_spec
OEM instruction document	80043-809-01 (11/2013); also 80043-810-01	A	S71 oem_spec
Status	current (referenced in fingersafe bulletins)	B	S71 inference
Cross-links	Families: NQ · Breakers: QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00934	QO2DTI	Square D	breaker-accessory	STATUS UNKNOWN

Square D QO mechanical interlock attachment (two 2P or 2P+1P side by side)

OEM part number	QO2DTI	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	Mechanical interlock for interlocking the handles of two 2P or one 2P and one 1P QO and Q1 circuit breakers mounted side-by-side so only one can be ON at a time (not QOU).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QO, Q1 (not QOU)	A	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		

Terminal Shield

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00580	**QOFSHALB12**	NQ IP2X QO(B) lug cover, high amp (fingersafe replacement), pkg of 12	QO/QOB 80-100 A 2P, 70-100 A 3P; QO-H/QOB-H 40-100 A 2P; QO-VH/QOB-VH A	unknown
EDH-SQD-00579	**QOFSLALB12**	NQ IP2X QO(B) lug cover, low amp (fingersafe replacement), pkg of 12	QO/QOB 10-70 A 1P & 2P, 10-60 A 3P; QO-H/QOB-H 15-30 A 2P; QO-HID 15-5 A	unknown

EDH-SQD-00580	QOFSHALB12	Square D	terminal-shield	STATUS UNKNOWN

NQ IP2X QO(B) lug cover, high amp (fingersafe replacement), pkg of 12

OEM part number	QOFSHALB12	A	S590 1640BR1701 Replacement parts table; oem_spec
Alternate / superseded numbers	QOFSHALB	A	S592 alias; 80043-818-01 title; oem_spec
Description	NQ IP2X QO(B) Lug Cover High Amp; 12 per package.	A	S590, S592 oem_spec
Breaker compatibility	QO/QOB 80-100 A 2P, 70-100 A 3P; QO-H/QOB-H 40-100 A 2P; QO-VH/QOB-VH 40-100 A 2P/3P; QOH 40-100 A 2P; QOH-X/QOBXD 70-100 A 2P/3P	A	S592 80043-818-01 Table 2; oem_spec
OEM instruction document	80043-818-01 (11/2015)	A	S592 oem_spec
Cross-links	Families: NQ · Breakers: QOB (bolt-on), QO (plug-on)		
Not yet documented	Dimensions, Material		

EDH-SQD-00579	QOFSLALB12	Square D	terminal-shield	STATUS UNKNOWN

NQ IP2X QO(B) lug cover, low amp (fingersafe replacement), pkg of 12

OEM part number	QOFSLALB12	A	S590 1640BR1701 Replacement parts table; oem_spec
Alternate / superseded numbers	QOFSLALB	A	S592 alias; 80043-818-01 title; oem_spec
Description	NQ IP2X QO(B) Lug Cover Low Amp; 12 per package. Branch circuit breaker load-terminal cover that clips to the breaker and to the bus insulator mounting hole.	A	S590, S592 oem_spec
Breaker compatibility	QO/QOB 10-70 A 1P & 2P, 10-60 A 3P; QO-H/QOB-H 15-30 A 2P; QO-HID 15-50 A 1P/2P, 15-30 A 3P; QO-HM/QOB-HM 15-20 A 1P; QO-VH/QOB-VH 15-70 A 1P, 15-30 A 2P/3P; QOH-X/QOBXD 10-63 A 1-3P; QH/QHB 15-30 A 1-3P	A	S592 80043-818-01 Table 1; oem_spec
OEM instruction document	80043-818-01 (11/2015)	A	S592 oem_spec
Identification features	Branch breaker covers are IP2X only when wire appropriate for the breaker ampere rating is installed	A	S592 80043-818-01 NOTE; oem_spec
Cross-links	Families: NQ · Breakers: QOB (bolt-on), QO (plug-on)		
Not yet documented	Dimensions, Material		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00542	**HLO-1**	Square D handle lockoff for QO, Q1, A1 and Y1B breakers	QO, Q1, A1(B), Y1B A	1970 catalog item; current status unknown
EDH-SQD-00925	**QO1LO**	Square D QO 1P handle clamp (lock-off/lock-on, non-padlocking)	QO 1P (also listed for HOM 1P in Homeline accessories) A	unknown
EDH-SQD-00924	**QO3HT**	Square D QO 3-pole handle tie	QO 1P breakers (three adjacent) - inferred A	unknown
EDH-SQD-00923	**QOTHT**	Square D QOT handle tie	QOT tandem (side-by-side) 1P breakers A	unknown

EDH-SQD-00542 HLO-1 Square D handle-lock 1970 CATALOG ITEM; CUR

Square D handle lockoff for QO, Q1, A1 and Y1B breakers

OEM part number	HLO-1	A	S463, S638 oem_spec
Description	Handle Lockoff QO, Q1, A1 and Y1B - HLO-1 $0.90	A	S463 Digest 152 (1970) p.84; oem_spec
	Clamp for holding QO or Q1 either 1P, 2P or 3P circuit breaker handles in ON or OFF position.	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Application	accessory	A	same as above
Breaker compatibility	QO, Q1, A1(B), Y1B (Dealer Relectric lists HLO1 / HLO1-10 as padlock attachment (s10))	A	S463 Digest 152 (1970) p.84; oem_spec
	QO, Q1 1P/2P/3P	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQ, NQOD, NEHB, NQOB, NA1B, NH1B · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB, Square D Y1B 1-pole (NY1B)		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00925 QO1LO Square D handle-lock STATUS UNKNOWN

Square D QO 1P handle clamp (lock-off/lock-on, non-padlocking)

OEM part number	QO1LO	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	Handle clamp for holding QO 1P handle in ON or OFF position.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QO 1P (also listed for HOM 1P in Homeline accessories)	A	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00924	QO3HT	Square D	handle-lock	STATUS UNKNOWN

Square D QO 3-pole handle tie

OEM part number	QO3HT	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	Handle tie listed with QO1HT/QOTHT in Table 1.16 (three-breaker tie; exact description row ambiguous in extracted text).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QO 1P breakers (three adjacent) - inferred	A	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		
Open question	*Table text extraction does not give a separate description for QO3HT; confirm it ties three 1P QO breakers.*		

EDH-SQD-00923	QOTHT	Square D	handle-lock	STATUS UNKNOWN

Square D QOT handle tie

OEM part number	QOTHT	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	Handle tie: converts any two adjacent 120/240 Vac 1P side-by-side QOT circuit breakers to independent trip 2P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QOT tandem (side-by-side) 1P breakers	A	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00928	**GFI2PA**	Square D 2P QO-GFI handle padlock attachment, fixed	2P QO-GFI A	unknown
EDH-SQD-00964	**HJPA**	Square D PowerPact H/J padlock attachment (replacement for S29371)	PowerPacT H/J (inferred from S29371 replacement) C	unknown
EDH-SQD-00929	**QO1HPL**	Square D QO 2P/3P handle padlock attachment, loose	QO/QOB, Q1 2P and 3P A	unknown
EDH-SQD-00543	**QO-1PA**	Square D handle padlock attachment, 1-pole QO/QOB/Q1/Q1B/QFSB/HFSB	QO/QOB 1P (bulletin also covers QOU1PA and HOM1PA Series 1) A	1970 catalog item; current status unknown
EDH-SQD-00930	**QO1PAF**	Square D QO 1P padlock attachment, OFF only, fixed	QO 1P A	unknown
EDH-SQD-00544	**QO-1PL**	Square D handle padlock attachment, 2/3-pole QO/QOB/Q1/Q1B	QO/QOB, Q1 2P and 3P A	1970 catalog item; current status unknown
EDH-SQD-00932	**QO2PAF**	Square D QO 2P/3P padlock attachment, OFF only, fixed	QO 2P/3P A	unknown
EDH-SQD-00931	**QOADV1PAF**	Square D QO 1P padlock attachment, OFF only, for QO-GFI/CAFI/DF/EPD	1P QO-GFI, QO-CAFI, QO-DF, QO-EPD (also printed in 1P standard QO row A	unknown
EDH-SQD-00933	**QOGFI2PAF**	Square D 2P QO-GFI/CAFI/EPD padlock attachment, OFF only	2P QO-GFI, QO-CAFI, QO-EPD A	unknown
EDH-SQD-00926	**QOHPL**	Square D QO 1P handle padlock attachment, loose	QO/QOB 1P A	unknown
EDH-SQD-00927	**QOTHPA**	Square D QOT 1P side-by-side handle padlock attachment (obsolete)	QOT tandem breakers A	obsolete (OBS)
EDH-SQD-00963	**S29370**	Square D removable padlock handle device, lock OFF only, PowerPact B/H/J/L	PowerPacT B/H/J/L C	unknown
EDH-SQD-00961	**S29371**	Square D fixed padlock attachment, PowerPact H/J, lock ON or OFF	PowerPact H-frame and J-frame A	discontinued; replaced by HJPA

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00962	**S37422**	Square D fixed padlock attachment, PowerPact H/J, lock OFF only	PowerPact H-frame and J-frame **A**	unknown

EDH-SQD-00928	GFI2PA	Square D	padlock-attachment	STATUS UNKNOWN

Square D 2P QO-GFI handle padlock attachment, fixed

OEM part number	GFI2PA	**A**	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	For padlocking 2P QO-GFI circuit breakers in either ON or OFF position, fixed attachment.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	2P QO-GFI	**A**	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00964	HJPA	Square D	padlock-attachment	STATUS UNKNOWN

Square D PowerPact H/J padlock attachment (replacement for S29371)

OEM part number	HJPA	**C**	S645 se.com product page (search snippet); oem_spec
Description	Named by Schneider as replacement for S29371 fixed lock ON/OFF padlock attachment.	**C**	same as above
Application	accessory	**C**	same as above
Breaker compatibility	PowerPacT H/J (inferred from S29371 replacement)	**C**	S645 search snippet; inference
Cross-links	Families: NQ, NF, I-LINE · Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, Material, Status		
Open question	*Obtain OEM data sheet for HJPA.*		

EDH-SQD-00929	QO1HPL	Square D	padlock-attachment	STATUS UNKNOWN

Square D QO 2P/3P handle padlock attachment, loose

OEM part number	QO1HPL	**A**	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	For 2P and 3P QO and Q1 standard circuit breakers which require padlocking in either ON or OFF position - loose attachment.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	QO/QOB, Q1 2P and 3P	**A**	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00543	QO-1PA	Square D	padlock-attachment	1970 CATALOG ITEM; CUR

Square D handle padlock attachment, 1-pole QO/QOB/Q1/Q1B/QFSB/HFSB

OEM part number	QO-1PA	A	S463, S638 oem_spec
Description	Handle Padlock Attachment QO, QOB, Q1, Q1B, QFSB and HFSB (1 Pole) - QO-1PA $1.00	A	S463 Digest 152 (1970) p.84; oem_spec
	For padlocking 1P QO circuit breaker in ON or OFF position - fixed attachment. Bail supplied in silver (1/4 in shackle) and black (5/16 in shackle) versions; if locked ON, does not prevent tripping.	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Application	accessory	A	same as above
Breaker compatibility	QO/QOB 1P (bulletin also covers QOU1PA and HOM1PA Series 1)	A	same as above
Kit contents	Bail (A): silver for 1/4 in (6.4 mm) shackles; black for 5/16 in (7.9 mm) shackles; attachment frame with tabs bent into slots at ON and OFF ends	A	S640 pp. 1-2; oem_spec
OEM instruction document	Instruction Bulletin 48840-159-01 Rev. 01 (04/2010)	A	S640 p. 1; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00930	QO1PAF	Square D	padlock-attachment	STATUS UNKNOWN

Square D QO 1P padlock attachment, OFF only, fixed

OEM part number	QO1PAF	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	For padlocking 1P QO circuit breaker in OFF position only, fixed attachment (2012 list price $43.50).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QO 1P	A	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		
Open question	*2024 Table 1.16 text prints QOADV1PAF in the 1P-OFF-only row (and again for GFI/CAFI/DF/EPD) while the illustration is captioned QO1PAF - has QO1PAF been superseded by QOADV1PAF?*		

EDH-SQD-00544	QO-1PL	Square D	padlock-attachment	1970 CATALOG ITEM; CUR

Square D handle padlock attachment, 2/3-pole QO/QOB/Q1/Q1B

OEM part number	QO-1PL	A	S463, S638 oem_spec
Description	QO, QOB, Q1 and Q1B (2 or 3 Pole) - QO-1PL $1.00	A	S463 Digest 152 (1970) p.84; oem_spec
	For 2P and 3P QO and Q1 standard circuit breakers which require padlocking in either ON or OFF position - fixed attachment.	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Application	accessory	A	same as above
Breaker compatibility	QO/QOB, Q1 2P and 3P	A	same as above
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00932	QO2PAF	Square D	padlock-attachment	STATUS UNKNOWN

Square D QO 2P/3P padlock attachment, OFF only, fixed

OEM part number	QO2PAF	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	For padlocking 2P and 3P QO circuit breakers in OFF position only, fixed attachment.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QO 2P/3P	A	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00931	QOADV1PAF	Square D	padlock-attachment	STATUS UNKNOWN

Square D QO 1P padlock attachment, OFF only, for QO-GFI/CAFI/DF/EPD

OEM part number	QOADV1PAF	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	For padlocking 1P QO-GFI, QO-CAFI, QO-DF and QO-EPD circuit breakers in OFF position only, fixed attachment.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	1P QO-GFI, QO-CAFI, QO-DF, QO-EPD (also printed in 1P standard QO row of 2024 table)	A	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00933	QOGFI2PAF	Square D	padlock-attachment	STATUS UNKNOWN

Square D 2P QO-GFI/CAFI/EPD padlock attachment, OFF only

OEM part number	QOGFI2PAF	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	For padlocking 2P QO-GFI, QO-CAFI and QO-EPD circuit breakers in OFF position only, fixed attachment.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	2P QO-GFI, QO-CAFI, QO-EPD	A	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00926	QOHPL	Square D	padlock-attachment	STATUS UNKNOWN

Square D QO 1P handle padlock attachment, loose

OEM part number	QOHPL	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	For padlocking 1P QO circuit breaker in ON or OFF position - loose attachment.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QO/QOB 1P	A	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		
Open question	*2024 text row for QOHPL also reads "For padlocking 1P side-by-side QOT" in one distributor summary; 2012 list shows QOHPL as loose 1P attachment ($9.90).*		

EDH-SQD-00927	QOTHPA	Square D	padlock-attachment	OBSOLETE (OBS)

Square D QOT 1P side-by-side handle padlock attachment (obsolete)

OEM part number	QOTHPA	A	S638 p. 1-8, Table 1.16 Accessories for use with QO and QOB Miniature Circuit Breakers; oem_spec
Description	For padlocking 1P side-by-side QOT circuit breaker in ON or OFF position. Marked OBS (obsolete) in 2024 Digest.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QOT tandem breakers	A	same as above
Status	obsolete (OBS)	A	same as above
Cross-links	Families: NQ, NQOD, NQOB · Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material		

EDH-SQD-00963	S29370	Square D	padlock-attachment	STATUS UNKNOWN

Square D removable padlock handle device, lock OFF only, PowerPact B/H/J/L

OEM part number	S29370	C	S645 se.com product page (search snippet); oem_spec
Description	Removable padlock attachment, lock OFF only; includes one removable padlock attachment device (per Schneider product page snippet).	C	same as above
Application	accessory	C	same as above
Breaker compatibility	PowerPacT B/H/J/L	C	S645 search snippet; oem_spec
Cross-links	Families: NQ, NF, I-LINE · Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR), Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00961	S29371	Square D	padlock-attachment	DISCONTINUED; REPLACED

Square D fixed padlock attachment, PowerPact H/J, lock ON or OFF

OEM part number	S29371	A	S641 pp. 1-2; oem_spec
Description	Fixed padlock attachment kit; allows locking H- and J-frame breakers using up to three padlocks; locks ON (I) or OFF (O). Kit includes mounting screw; torque 10 lb-in (1.2 N-m), Pozidriv #2 or slotted screwdriver.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame and J-frame	A	same as above
Torque values	10 lb-in (1.2 N-m)	A	same as above
OEM instruction document	Instruction Bulletin 48940-241-01 Rev. 01 (03/2010)	A	same as above
Status	discontinued; replaced by HJPA	C	S645 se.com product page (search snippet); oem_spec
Replacement / successor	HJPA	C	same as above
Cross-links	Families: NQ, NF, I-LINE · Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, Material		

EDH-SQD-00962	S37422	Square D	padlock-attachment	STATUS UNKNOWN

Square D fixed padlock attachment, PowerPact H/J, lock OFF only

OEM part number	S37422	A	S641 pp. 1-2; oem_spec
Description	Fixed padlock attachment kit, OFF (O) only; up to three padlocks; mounting screw torque 10 lb-in.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame and J-frame	A	same as above
Torque values	10 lb-in (1.2 N-m)	A	same as above
OEM instruction document	Instruction Bulletin 48940-241-01 Rev. 01 (03/2010)	A	same as above
Cross-links	Families: NQ, NF, I-LINE · Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, Material, Status		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00610	**LP9618**	Key NSR-251 for Square D panelboard locks	—	unknown
EDH-SQD-00555	**PK-4FL**	Square D flush lock for MONO-FLAT trims	—	1970 catalog item; current status unknown
EDH-SQD-00608	**PK5FL**	Flush lock for 400 A NEHB main breaker fronts / telephone cabinet fronts 36 in+ wide	—	still listed in current NQ catalog 1640CT0801

EDH-SQD-00610	LP9618	Square D	other	STATUS UNKNOWN

Key NSR-251 for Square D panelboard locks

OEM part number	LP9618	A	S609, S643 13-10 Table 13.2; oem_spec
Description	Key - NSR-251 (for all locks)	A	S609 oem_spec
	Key NSR-251 for PK4FL flush lock / PK5FL sliding vault lock / Type 3R vault handle.	A	S643 p. 23, Indoor Enclosure Accessories; oem_spec
Cross-links	Families: NQ, NQOD, NF		
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00555	PK-4FL	Square D	other	1970 CATALOG ITEM; CUR

Square D flush lock for MONO-FLAT trims

OEM part number	PK-4FL	A	S463, S643 oem_spec
Description	Flush Lock for Mono-Flat Trims - PK-4FL $7.50	A	S463 Digest 152 (1970) p.84; oem_spec
	Flush lock (standard) for NQ / NQOD trim doors; uses key NSR-251 (LP9618).	A	S643 p. 23, Indoor Enclosure Accessories; oem_spec
Installation location	Trim front door	A	same as above
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQ, NQOD, NQOB, NA1B, NH1B		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00608	PK5FL	Square D	other	STILL LISTED IN CURREN

Flush lock for 400 A NEHB main breaker fronts / telephone cabinet fronts 36 in+ wide

OEM part number	PK5FL	A	S609, S643 13-7 Table 13.3; oem_spec
Description	Lock, Type 1 enclosures: NEHB all 400 A main circuit breaker fronts; telephone cabinets fronts on boxes 36 in or wider	A	S609 oem_spec
	Sliding vault lock (optional) for NQ / NQOD trim doors; key NSR-251.	A	S643 p. 23, Indoor Enclosure Accessories; oem_spec
Installation location	Trim front door	A	same as above
Status	still listed in current NQ catalog 1640CT0801 (PK5FL appears in 1640CT0801 text (candidate scan) - context not reviewed)	B	S609 inference
Cross-links	Families: NQ, NQOD, NEHB		
Not yet documented	Dimensions, Material		
Open question	*Existing catalogue record PK5FL describes it as flush lock for 400 A NEHB fronts / telephone cabinet fronts 36 in+ - same part used on several fronts?*		

4.9 NQO — NQO / NQOB panelboard

FAM-SQD-003 · panelboard · aka NQOB · markings: Schneider Electric, Square D

Early Square D three-phase lighting panelboards using Q1/Q1B plug-on and bolt-on breakers, developed late 1960s and obsoleted 1987 (replaced by NQOD). No kit data found in this batch.

Attribute	Value	Cl.	Sources
Status	obsolete	A	S87 oem_spec
Era of manufacture	late 1960s-1987	A	same as above
Successor	NQOD (1987), then NQ (2008) (Sequence inferred from FAQ timelines)	B	S87 inference
Branch breakers accepted	Q1 / Q1B	A	S87 oem_spec

Key documents: S87 FA332061 Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO /; S463 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00819	**LX-26TF**	Legacy 1970 NQO column-width screw-cover front LX-26TF / LX-26TS (column width 8-5/8 in W x 5 in D x 26-1/2 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00820	**LX-32TF**	Legacy 1970 NQO column-width screw-cover front LX-32TF / LX-32TS (column width 8-5/8 in W x 5 in D x 32-1/2 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00821	**LX-40TF**	Legacy 1970 NQO column-width screw-cover front LX-40TF / LX-40TS (column width 8-5/8 in W x 5 in D x 40 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00822	**LX-45TF**	Legacy 1970 NQO column-width screw-cover front LX-45TF / LX-45TS (column width)	—	Obsolete (1970 catalog item)
EDH-SQD-00823	**LX-49TF**	Legacy 1970 NQO column-width screw-cover front LX-49TF / LX-49TS (column width 8-5/8 in W x 5 in D x 49 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00809	**MDC-38TF**	Legacy 1970 NQO MONO-FLAT front MDC-38TF / MDC-38TS (20 in W x 5-3/4 in D x 38 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00810	**MDC-41TF**	Legacy 1970 NQO MONO-FLAT front MDC-41TF / MDC-41TS (20 in W x 5-3/4 in D x 41 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00811	**MDC-50TF**	Legacy 1970 NQO MONO-FLAT front MDC-50TF / MDC-50TS (20 in W x 5-3/4 in D x 50 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00812	**MDC-53TF**	Legacy 1970 NQO MONO-FLAT front MDC-53TF / MDC-53TS (20 in W x 5-3/4 in D x 53 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00813	**MSC-23TF**	Legacy 1970 NQOB MONO-FLAT front MSC-23TF / MSC-23TS (20 in W x 5-3/4 in D x 23 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00814	**MSC-26TF**	Legacy 1970 NQOB MONO-FLAT front MSC-26TF / MSC-26TS (20 in W x 5-3/4 in D x 26 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00815	**MSC-29TF**	Legacy 1970 NQOB MONO-FLAT front MSC-29TF / MSC-29TS (20 in W x 5-3/4 in D x 29 in H)	—	Obsolete (1970 catalog item)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00816	**MSC-35TF**	Legacy 1970 NQOB MONO-FLAT front MSC-35TF / MSC-35TS (20 in W x 5-3/4 in D x 35 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00817	**MSC-38TF**	Legacy 1970 NQOB MONO-FLAT front MSC-38TF / MSC-38TS (20 in W x 5-3/4 in D x 38 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00818	**MSC-44TF**	Legacy 1970 NQOB MONO-FLAT front MSC-44TF / MSC-44TS (20 in W x 5-3/4 in D x 44 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00802	**NQC-20TF**	Legacy 1970 NQO MONO-FLAT front NQC-20TF / NQC-20TS (14 in W x 4 in D x 20-1/4 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00803	**NQC-24TF**	Legacy 1970 NQO MONO-FLAT front NQC-24TF / NQC-24TS (14 in W x 4 in D x 24-1/4 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00804	**NQC-28TF**	Legacy 1970 NQO MONO-FLAT front NQC-28TF / NQC-28TS (14 in W x 4 in D x 28 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00805	**NQC-32TF**	Legacy 1970 NQO MONO-FLAT front NQC-32TF / NQC-32TS (14 in W x 4 in D x 32-1/2 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00806	**NQC-37TF**	Legacy 1970 NQO MONO-FLAT front NQC-37TF / NQC-37TS (14 in W x 4 in D x 37-3/4 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00807	**NQC-42TF**	Legacy 1970 NQO MONO-FLAT front NQC-42TF / NQC-42TS (14 in W x 5-3/4 in D x 42-1/4 in H)	—	Obsolete (1970 catalog item)
EDH-SQD-00808	**NQC-48TF**	Legacy 1970 NQO MONO-FLAT front NQC-48TF / NQC-48TS (14 in W x 5-3/4 in D x 48-3/4 in H)	—	Obsolete (1970 catalog item)

EDH-SQD-00819 LX-26TF Square D trim — OBSOLETE (1970 CATALOG

Legacy 1970 NQO column-width screw-cover front LX-26TF / LX-26TS (column width 8-5/8 in W x 5 in D x 26-1/2 in H)

OEM part number	LX-26TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	LX-26TS (surface-mount version)	A	S463 alias; oem_spec
Description	Screw-cover front for unassembled Type NQO panelboards (basic devices NQO-826-143, NQO-826-144); suffix F = flush, S = surface. Column width has screw cover front.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box column width 8-5/8 in W x 5 in D x 26-1/2 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00820 LX-32TF Square D trim — OBSOLETE (1970 CATALOG

Legacy 1970 NQO column-width screw-cover front LX-32TF / LX-32TS (column width 8-5/8 in W x 5 in D x 32-1/2 in H)

OEM part number	LX-32TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	LX-32TS (surface-mount version)	A	S463 alias; oem_spec
Description	Screw-cover front for unassembled Type NQO panelboards (basic devices NQO-832-203, NQO-832-204, NQO-832-143M, NQO-832-144M); suffix F = flush, S = surface. Column width has screw cover front.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box column width 8-5/8 in W x 5 in D x 32-1/2 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00821	LX-40TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO column-width screw-cover front LX-40TF / LX-40TS (column width 8-5/8 in W x 5 in D x 40 in H)

OEM part number	LX-40TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	LX-40TS (surface-mount version)	A	S463 alias; oem_spec
Description	Screw-cover front for unassembled Type NQO panelboards (basic devices NQO-840-303, NQO-840-304, NQO-840-203M, NQO-840-204M); suffix F = flush, S = surface. Column width has screw cover front.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box column width 8-5/8 in W x 5 in D x 40 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00822	LX-45TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO column-width screw-cover front LX-45TF / LX-45TS (column width)

OEM part number	LX-45TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	LX-45TS (surface-mount version)	A	S463 alias; oem_spec
Description	Screw-cover front for unassembled Type NQO panelboards (basic devices NQO-845-304M); suffix F = flush, S = surface. Column width has screw cover front.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box column width (box H assumed 45 in; not printed on p.58 for 3-phase) (Box dimensions are those of the paired basic device; front outer size not printed)	C	S463 p.58 Box Dimensions table; inference
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00823	LX-49TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO column-width screw-cover front LX-49TF / LX-49TS (column width 8-5/8 in W x 5 in D x 49 in H)

OEM part number	LX-49TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	LX-49TS (surface-mount version)	A	S463 alias; oem_spec
Description	Screw-cover front for unassembled Type NQO panelboards (basic devices NQO-849-423, NQO-849-424); suffix F = flush, S = surface. Column width has screw cover front.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box column width 8-5/8 in W x 5 in D x 49 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00809	MDC-38TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO MONO-FLAT front MDC-38TF / MDC-38TS (20 in W x 5-3/4 in D x 38 in H)

OEM part number	MDC-38TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	MDC-38TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQO panelboards (basic devices NQO-38-303-4, NQO-38-304-4 (400 A)); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 20 in W x 5-3/4 in D x 38 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00810	MDC-41TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO MONO-FLAT front MDC-41TF / MDC-41TS (20 in W x 5-3/4 in D x 41 in H)

OEM part number	MDC-41TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	MDC-41TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQO panelboards (basic devices NQO-41-423-4, NQO-41-424-4 (400 A)); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 20 in W x 5-3/4 in D x 41 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00811	MDC-50TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO MONO-FLAT front MDC-50TF / MDC-50TS (20 in W x 5-3/4 in D x 50 in H)

OEM part number	MDC-50TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	MDC-50TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQO panelboards (basic devices NQO-50-303-4M, NQO-50-304-4M (400 A main breaker)); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 20 in W x 5-3/4 in D x 50 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00812	MDC-53TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO MONO-FLAT front MDC-53TF / MDC-53TS (20 in W x 5-3/4 in D x 53 in H)

OEM part number	MDC-53TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	MDC-53TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQO panelboards (basic devices NQO-53-423-4M, NQO-53-424-4M (400 A main breaker)); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 20 in W x 5-3/4 in D x 53 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00813	MSC-23TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQOB MONO-FLAT front MSC-23TF / MSC-23TS (20 in W x 5-3/4 in D x 23 in H)

OEM part number	MSC-23TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	MSC-23TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQOB panelboards (basic devices NQOB-23-123, NQOB-23-124, NQOB-23-083M); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 20 in W x 5-3/4 in D x 23 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00814	MSC-26TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQOB MONO-FLAT front MSC-26TF / MSC-26TS (20 in W x 5-3/4 in D x 26 in H)

OEM part number	MSC-26TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	MSC-26TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQOB panelboards (basic devices NQOB-26-203-1, NQOB-26-203-2, NQOB-26-204, NQOB-26-163M, NQOB-26-144M); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 20 in W x 5-3/4 in D x 26 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00815	MSC-29TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQOB MONO-FLAT front MSC-29TF / MSC-29TS (20 in W x 5-3/4 in D x 29 in H)

OEM part number	MSC-29TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	MSC-29TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQOB panelboards (basic devices NQOB-29-303, NQOB-29-304-1, NQOB-29-304-2, NQOB-29-203M, NQOB-29-244M); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 20 in W x 5-3/4 in D x 29 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00816	MSC-35TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQOB MONO-FLAT front MSC-35TF / MSC-35TS (20 in W x 5-3/4 in D x 35 in H)

OEM part number	MSC-35TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	MSC-35TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQOB panelboards (basic devices NQOB-35-423, NQOB-35-424, NQOB-35-304M); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 20 in W x 5-3/4 in D x 35 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00817	MSC-38TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQOB MONO-FLAT front MSC-38TF / MSC-38TS (20 in W x 5-3/4 in D x 38 in H)

OEM part number	MSC-38TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	MSC-38TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQOB panelboards (basic devices NQOB-38-303M); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 20 in W x 5-3/4 in D x 38 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00818	MSC-44TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQOB MONO-FLAT front MSC-44TF / MSC-44TS (20 in W x 5-3/4 in D x 44 in H)

OEM part number	MSC-44TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	MSC-44TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQOB panelboards (basic devices NQOB-44-423M, NQOB-44-424M); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 20 in W x 5-3/4 in D x 44 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00802	NQC-20TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO MONO-FLAT front NQC-20TF / NQC-20TS (14 in W x 4 in D x 20-1/4 in H)

OEM part number	NQC-20TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	NQC-20TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQO panelboards (basic devices NQO-20-123, NQO-20-124); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 14 in W x 4 in D x 20-1/4 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00803	NQC-24TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO MONO-FLAT front NQC-24TF / NQC-24TS (14 in W x 4 in D x 24-1/4 in H)

OEM part number	NQC-24TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	NQC-24TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQO panelboards (basic devices NQO-24-203-1, NQO-24-203-2, NQO-24-204, NQO-24-123M, NQO-24-124M); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 14 in W x 4 in D x 24-1/4 in H (MLO); 14 x 5-3/4 x 24-1/4 (NQO-24-123M MCB) (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00804	NQC-28TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO MONO-FLAT front NQC-28TF / NQC-28TS (14 in W x 4 in D x 28 in H)

OEM part number	NQC-28TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	NQC-28TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQO panelboards (basic devices NQO-28-303, NQO-28-304-1, NQO-28-304-2, NQO-28-203M, NQO-28-204M); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 14 in W x 4 in D x 28 in H (MLO); 14 x 5-3/4 x 28 (MCB) (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00805	NQC-32TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO MONO-FLAT front NQC-32TF / NQC-32TS (14 in W x 4 in D x 32-1/2 in H)

OEM part number	NQC-32TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	NQC-32TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQO panelboards (basic devices NQO-32-423, NQO-32-424, NQO-32-304M); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 14 in W x 4 in D x 32-1/2 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00806	NQC-37TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO MONO-FLAT front NQC-37TF / NQC-37TS (14 in W x 4 in D x 37-3/4 in H)

OEM part number	NQC-37TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	NQC-37TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQO panelboards (basic devices NQO-37-543, NQO-37-544, NQO-37-303M); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 14 in W x 4 in D x 37-3/4 in H (MLO); 14 x 5-3/4 x 37-3/4 (MCB) (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00807	NQC-42TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO MONO-FLAT front NQC-42TF / NQC-42TS (14 in W x 5-3/4 in D x 42-1/4 in H)

OEM part number	NQC-42TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	NQC-42TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQO panelboards (basic devices NQO-42-423M, NQO-42-424M); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 14 in W x 5-3/4 in D x 42-1/4 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

EDH-SQD-00808	NQC-48TF	Square D	trim	OBSOLETE (1970 CATALOG

Legacy 1970 NQO MONO-FLAT front NQC-48TF / NQC-48TS (14 in W x 5-3/4 in D x 48-3/4 in H)

OEM part number	NQC-48TF	A	S463 Digest 152 (1970) p.59 (leaf 60) front table; dims p.58 (leaf 59); oem_spec
Alternate / superseded numbers	NQC-48TS (surface-mount version)	A	S463 alias; oem_spec
Description	MONO-FLAT (concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel) front for unassembled Type NQO panelboards (basic devices NQO-48-543M, NQO-48-544M); suffix F = flush, S = surface.	A	same as above
Finish / plating	Gray baked enamel	A	S463 p.58 Cabinets; oem_spec
Dimensions	Fits box 14 in W x 5-3/4 in D x 48-3/4 in H (Box dimensions are those of the paired basic device; front outer size not printed)	A	S463 p.58 Box Dimensions table; oem_spec
Status	Obsolete (1970 catalog item)	B	S463 inference
Cross-links	Families: NQO · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	front outer dimensions, trim clamp part numbers		

4.10 NQOB — Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)

FAM-SQD-011 · panelboard · aka NQ0, NQH, NQHB, NQO, NQO-LX, NQOB, NQOB column, NQOB-LX, NTFB (basic NQOB bus) · markings: Square D

Square D's 250 V AC lighting/appliance panelboards of the 1960s-1980s: NQO with plug-on QO breakers and NQOB with bolt-on QOB breakers, combinable lighting and power up to 100 A branches; mains 100-600 A. Square D advertised a non-interchangeability system (NEC 240-25(g)) common to NQO, NQOB, NA1B and loadcenters. Replacement-part data: QOB branch breakers, SK5668 branch kit (not SK5669), QOFP fillers, 100 A vs 60 A column-width branch limits per conflicting FAQs.

1970 Square D Digest data for NQO/NQOB: box sizes 14 in W x 4 in D, 14 in W x 5-3/4 in D, 20 in W x 5-3/4 in D (NQOB 14 in widths shown); column width (LX) about 6-3/4 in W x 5 in D; column-width NQOB available factory assembled only. Cabinets: MONO-FLAT fronts with concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel. Catalog numbers of the form NQO-24-203-1, NQOB-35-424, NQO-20-3L (Canada) etc.

Attribute	Value	Cl.	Sources
Status	Obsolete; enclosure parts not available; QSFB switch/fuse unit obsolete; trim clamp PK1TC obsolete (search summaries)	B	S458, S459 oem_web
Era of manufacture	Advertised by Square D in May and September 1960 (NQO plug-in, NQOB bolted connection); a Schneider timeline (search summary) says 'developed in late 1960s till obsolescence in 1987' - conflicts with the 1960 ads (1960 ads are OEM-authored; the 'late 1960s' statement is unverified search text)	B	S437, S438, S459 oem_spec
Successor	NQ / NQOD panelboards (QO/QOB) - inference	D	inference

Attribute	Value	Cl.	Sources
Voltage rating	250 V class AC only (1960: NQO and NQOB 'AC only'); 120/240 and 120/208 V	A	S438, S437 oem_spec
	NQO: 120/208, 120/240, 240 V AC; NQOB: 120/208, 120/240 V AC (NQOB-LX also 240 V AC)	A	S463 Digest 152 (1970) p.55; oem_spec
Main ampacity	NQO: 400 A lugs / 400 A main breaker; NQOB: 600 A lugs / 400 A main breaker; column-width NQO-LX / NQOB-LX: 225 A lugs / 100 A main breaker	A	same as above
Branch breakers accepted	1960 USA: QO plug-on / QOB bolt-on 1-pole 15-50 A, 2-pole 15-70 A and 70-100 A, 3-pole 15-50 A and 70-100 A; Canada 1985: Q1 plug-on / Q1B bolt-on (QO/QOB with Visi-trip), 22,000 A RMS sym rated types	A	S437, S439 oem_spec
	NQO: QO plug-on 15-100 A 1/2/3-pole (QO 70 A and 100 A frames), also Q1; NQOB: QOB / Q1B bolt-on 15-100 A; QO/QOB 5,000 A RMS UL interrupting, black handle; Q1/Q1B take 2 spaces per pole in 225 A max mains panels, 1 space per pole in 400/600 A basic devices; NQH/NQHB: QH/QHB 15-30 A	A	S463 Digest 152 (1970) p.55-56; oem_spec
Mains	100 A through 600 A mains (1960 ad)	A	S437 oem_spec
Non interchangeability	Square D non-interchangeable system standard on all 250 V 100 A branch circuit breaker panelboards (NQO, NQOB, NA1B) per NEC 240-25(g)	A	S438 oem_spec
Basic bus	NTFB is the basic NQOB panel bus (QSFB switch/fuse unit came from the NTFB panel)	A	S458 oem_web
Dimensions	Boxes 14 in W x 4 in D, 14 in W x 5-3/4 in D, 20 in W x 5-3/4 in D; LX column width ~6-3/4 in W x 5 in D (OCR) (Fractions partly garbled by OCR)	B	S463 Digest 152 (1970) p.55; oem_spec
Finish / plating	MONO-FLAT fronts, concealed trim clamps, concealed hinges, flush lock, gray baked enamel	A	S463 Digest 152 (1970) p.58-65; oem_spec
Column width	Column width type NQOB panelboards are available factory assembled only	A	S463 oem_spec

Breaker families associated: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB
Key documents: S437 sim_ecm_1960-05_59_5 Electrical Construction and Maintenance, Vol 59 No 5, May 1960 - Square D advertisement 'S; S438 sim_ecm_1960-09_59_9 Electrical Construction and Maintenance, Vol 59 No 9, September 1960 - Square D advertisem; S439 bwb_P9-BJG-737 Electrozad (Electrozad Supply Co. catalogue / price book, Copel Inc. 1985) - ITE-Siemens, ; S449 industrialelectr0000earl Industrial Electrical Wiring: Design and Application (1987), section 'Type NQOB Panelboard; S458 Schneider Electric FAQ FA96717 - What is the QSFB switch/fuse unit and is it available? (N; S459 Schneider Electric FAQ group on NQO/NQOB, NEHB, NA1B, NY1B (FA97632, FA124608, FA232958, F; S463 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P
Also fits this family (entry printed elsewhere): PK27GTA, PK23GTA, QO-1HT, HLO-1, QO-1PA, QO-1PL, PK-4FL, QOTHT, QO3HT, QO1LO, QOHPL, QOTHPA, GFI2PA, QO1HPL, QO1PAF, QOADV1PAF, QO2PAF, QOGFI2PAF, QO2DTI, QO2DTIM

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00549	**QO-100ASF**	Square D 100 A sub-feed lug kit for main-lug NQO panelboards	—	1970 catalog item; current status unknown
EDH-SQD-00550	**QO-225ASF**	Square D 225 A sub-feed lug kit for main-lug NQO panelboards	—	1970 catalog item; current status unknown
EDH-SQD-00520	**SF-100LP**	Square D 100 A sub-feed lug kit for NQO and NQOB panelboards	—	Unknown (1985 Canadian price book)
EDH-SQD-00521	**SF-225LP**	Square D 225 A sub-feed lug kit for NQO, NQOB and NY1B panelboards	—	Unknown (1985 Canadian price book)

EDH-SQD-00549 **QO-100ASF** Square D sub-feed-lug-kit **1970 CATALOG ITEM; CUR**

Square D 100 A sub-feed lug kit for main-lug NQO panelboards

OEM part number	QO-100ASF	A	S463 oem_spec
Description	100 A sub-feed lug kit, for use with main lug NQO panelboards only; sub-feed lugs must be same rating as panelboard - $25.00	A	S463 Digest 152 (1970) p.84; oem_spec
Application	sub-feed	A	S463 oem_spec
Current rating	100 A	A	same as above
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQOB		
Not yet documented	current_status, Dimensions, Material		
Open question	*Canadian equivalent SF-100LP (1985 Electrozad)?*		

EDH-SQD-00550	QO-225ASF	Square D	sub-feed-lug-kit	1970 CATALOG ITEM; CUR

Square D 225 A sub-feed lug kit for main-lug NQO panelboards

OEM part number	QO-225ASF	A	S463 oem_spec
Description	225 A sub-feed lug kit, main lug NQO panelboards only; must match panelboard rating - $30.00	A	S463 Digest 152 (1970) p.84; oem_spec
Application	sub-feed	A	S463 oem_spec
Current rating	225 A	A	same as above
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQOB		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00520	SF-100LP	Square D	sub-feed-lug-kit	UNKNOWN (1985 CANADIAN

Square D 100 A sub-feed lug kit for NQO and NQOB panelboards

OEM part number	SF-100LP	C	S439 distributor
Description	100 Amp. sub-feed lug kit - (NQO & NQOB) ... SF-100LP $74.00	C	same as above
Application	sub-feed	C	same as above
Current rating	100 A	C	same as above
Status	Unknown (1985 Canadian price book)	D	S439 inference
Cross-links	Families: NQOB		
Not yet documented	Dimensions, Kit contents, Material		

EDH-SQD-00521	SF-225LP	Square D	sub-feed-lug-kit	UNKNOWN (1985 CANADIAN

Square D 225 A sub-feed lug kit for NQO, NQOB and NY1B panelboards

OEM part number	SF-225LP	C	S439 distributor
Description	225 Amp. sub-feed lug kit (NQO, NQOB & NYIB) ... SF-225LP $80.00	C	same as above
Application	sub-feed	C	same as above
Current rating	225 A	C	same as above
Status	Unknown (1985 Canadian price book)	D	S439 inference
Cross-links	Families: NQOB, NEHB		
Not yet documented	Dimensions, Kit contents, Material		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00523	**SK5668**	Square D branch connector kit for NQOB panelboards	—	Unknown

EDH-SQD-00523	SK5668	Square D	branch-connector-kit	UNKNOWN

Square D branch connector kit for NQOB panelboards

OEM part number	SK5668	C	S459 oem_web
Description	Correct branch kit for NQOB is SK5668, not SK5669 (SK5669 not designed for NQOB) (Search-engine summary of Schneider FAQ; FAQ number not mapped)	C	same as above
Status	Unknown	D	S459 inference
Cross-links	Families: NQOB · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Kit contents, Material		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00522	**SK-5666**	Square D Q1B panelboard mounting kit for NQOB	Q1B / QOB bolt-on C	Traded by dealer
EDH-SQD-00524	**SK5669**	Square D mounting assembly for QO2125 in NQO interior (not for NQOB)	QO2125 (2-pole 125 A QO) in NQO C	unknown

EDH-SQD-00522	SK-5666	Square D	breaker-mounting-kit	TRADED BY DEALER

Square D Q1B panelboard mounting kit for NQOB

OEM part number	SK-5666	C	S444, S629 surplus_listing
Description	Q1B; Panel Board Mounting Kit for NQOB	C	S444 surplus_listing
	Bus connection hardware for obsolete NA1B and NY1B panelboards, mounting one 3-pole breaker up to 100 A	C	S629 distributor
Breaker compatibility	Q1B / QOB bolt-on	C	S444 surplus_listing
Status	Traded by dealer	C	same as above
Aftermarket / reproduction	Sourcing: Breaker King SKU BSK5666; condition not stated	D	S629 distributor
Cross-links	Families: NQOB, NA1B · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Relationship to SK5668 (stated by Schneider FAQ summaries as the correct NQOB branch kit)?*		

EDH-SQD-00524	SK5669	Square D	breaker-mounting-kit	STATUS UNKNOWN

Square D mounting assembly for QO2125 in NQO interior (not for NQOB)

OEM part number	SK5669	C	S459 oem_web
Description	A QO2125 can be used in an NQO interior with an SK5669 mounting assembly; SK5669 is not designed for the NQOB panel (Search-engine summary)	C	same as above
Breaker compatibility	QO2125 (2-pole 125 A QO) in NQO	C	same as above
Cross-links	Families: NQOB · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Kit contents, Material		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00554	**PK-9GTA**	Square D equipment ground bar kit, 1-12 circuits (NQO/NQOB/NA1B/NH1B/NTFB/NTHB)	—	1970 catalog item; current status unknown

EDH-SQD-00554	PK-9GTA	Square D	ground-bar	1970 CATALOG ITEM; CUR

Square D equipment ground bar kit, 1-12 circuits (NQO/NQOB/NA1B/NH1B/NTFB/NTHB)

OEM part number	PK-9GTA	A	S463 oem_spec
Description	Equipment Ground Bar Kits NQO, NQOB, NA1B, NH1B, NTFB and NTHB: 1 thru 12 circuits - PK-9GTA $1.30	A	S463 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQOB, NA1B, NH1B		
Not yet documented	current_status, Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00551	**QO-1CP**	Square D closure plate for twistout in NQO, NQOB and NA1B interior trims	—	1970 catalog item; current status unknown

EDH-SQD-00551	QO-1CP	Square D	filler-plate	1970 CATALOG ITEM; CUR

Square D closure plate for twistout in NQO, NQOB and NA1B interior trims

OEM part number	QO-1CP	A	S463 oem_spec
Description	Closure Plate for Twistout in NQO, NQOB and NA1B Interior Trims - QO-1CP $0.50	A	S463 Digest 152 (1970) p.84; oem_spec
Installation location	Deadfront/interior trim twistout openings	A	S463 oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQOB, NA1B, NH1B		
Not yet documented	current_status, Dimensions, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00525	**PK1TC**	Square D trim clamp (NQOB), obsolete	—	Obsolete, no replacement

EDH-SQD-00525	PK1TC	Square D	hardware-kit	OBSOLETE, NO REPLACEME

Square D trim clamp (NQOB), obsolete

OEM part number	PK1TC	C	S459 oem_web
Description	Trim clamp is PK1TC, obsolete with no replacement (Search-engine summary)	C	same as above
Status	Obsolete, no replacement	C	same as above
Cross-links	Families: NQOB		
Not yet documented	Dimensions, Kit contents, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00560	**739137**	Square D leveling nut (NQOB panelboard)	—	1970 catalog item; current status unknown

EDH-SQD-00560	739137	Square D	fastener	1970 CATALOG ITEM; CUR

Square D leveling nut (NQOB panelboard)

OEM part number	739137	B	S463 oem_spec
Description	Example replacement-part order: '4 - 739137 leveling nuts for use in 120/240 V., 1 Ph., 3 W., 225 A. main lug panelboard catalog number NQOB-3456-8'	B	S463 Digest 152 (1970) p.85; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQOB		
Not yet documented	Dimensions, Installation location, thread		
Open question	*OCR shows '7391 37' - confirm number*		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00545	**HPA-2QFS**	Square D padlock attachment for QFSB switch, 2/3-pole	—	1970 catalog item; current status unknown

EDH-SQD-00545	HPA-2QFS	Square D	padlock-attachment	1970 CATALOG ITEM; CUR

Square D padlock attachment for QFSB switch, 2/3-pole

OEM part number	HPA-2QFS	A	S463 oem_spec
Description	QFSB (2 or 3 Pole) - HPA-2QFS $1.00	A	S463 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQOB		
Not yet documented	current_status, Dimensions, Material		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00552	**PK-3SP**	Square D touch-up paint, blue-gray (aerosol)	—	1970 catalog item; current status unknown
EDH-SQD-00553	**PK-49SP**	Square D touch-up paint, ANSI 49 gray (aerosol)	—	1970 catalog item; current status unknown
EDH-SQD-00526	**QSFB**	Square D QSFB switch/fuse unit from NTFB (basic NQOB) panel	—	Obsolete and no longer available

EDH-SQD-00552	PK-3SP	Square D	other	1970 CATALOG ITEM; CUR

Square D touch-up paint, blue-gray (aerosol)

OEM part number	PK-3SP	A	S463 oem_spec
Description	Touch-up Paint, Blue-Gray (Aerosol Can) - PK-3SP $3.80	A	S463 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQOB, NA1B, NH1B		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00553	PK-49SP	Square D	other	1970 CATALOG ITEM; CUR

Square D touch-up paint, ANSI 49 gray (aerosol)

OEM part number	PK-49SP	A	S463 oem_spec
Description	Touch-up Paint USAS #49 Gray (Aerosol Can) - PK-49SP $3.80	A	S463 Digest 152 (1970) p.84; oem_spec
Finish / plating	USAS/ANSI 49 gray	A	S463 oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: NQOB, NA1B, NH1B		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00526	QSFB	Square D	other	OBSOLETE AND NO LONGER

Square D QSFB switch/fuse unit from NTFB (basic NQOB) panel

OEM part number	QSFB	A	S458 oem_web
Description	Switch/fuse unit from the NTFB panel (basic NQOB panel bus)	A	same as above
Status	Obsolete and no longer available	A	same as above
Cross-links	Families: NQOB		
Not yet documented	Dimensions, Kit contents, Material		

4.11 NQOD — NQOD panelboard (Class 1630)

FAM-SQD-002 · panelboard · aka NQOD lighting panelboard · markings: Schneider Electric, Square D

Predecessor of NQ; accepted QO plug-on and QOB bolt-on breakers. Sold 1987-2008. Schneider states NQ is the replacement but not a direct one: interior, box and trim must be replaced (e.g. NQOD30L400CU -> NQ30L4C plus new box/trim). All NQOD main breaker kits obsolete as of April 2016; branch connector kit SKNQOD225 existed for <=225 A interiors.

Attribute	Value	Cl.	Sources
Status	obsolete	A	S87, S88 oem_spec
	Obsolescent by 2009 Digest (Section 13 'Obsolescent Panelboards'); all NQOD main breaker kits no longer offered	A	S609, S610 13-1; FA299520; oem_spec
Era of manufacture	1987-2008	A	S87 oem_spec
Successor	NQ (not a direct replacement; replace interior, box and trim)	A	S89, S88 oem_spec
	NQ panelboard (current style)	A	S610, S613 FA299520, FA228483; oem_spec
Branch breakers accepted	QO / QOB	A	S87 oem_spec

Breaker families associated: KI / KC frame (legacy), QO (plug-on), QOB (bolt-on)

Key documents: S34 80043-699-03 NQOD Panelboard Main Circuit Breaker (250 A Maximum) and Adapter Kit Installation, Class 1; S85 FA102748 Schneider Electric FAQ FA102748: What is the SKNQOD225 and where is it used?; S87 FA332061 Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO /; S88 FA123424 Schneider Electric FAQ FA123424: Will the main breaker adapter kits for NQ panelboards wor; S89 FA128003 Schneider Electric FAQ FA128003: What is the replacement for NQOD30L400CU?; S609 Digest Section 13 (2009); distributor file name Square_D_QM3890B_Catalog.pdf Square D Digest (2009) Section 13 - Obsolescent Panelboards (QMB RTI, QMB replacement unit; S610 FA299520 Schneider Electric FAQ FA299520: Can you replace a Q2L main breaker, on a NQOD panel, with; S613 FA228483 Schneider Electric FAQ FA228483: Can a main breaker be changed out or added to a NQOD pane

Also fits this family (entry printed elsewhere): NQODBFMB20, S37444, S37445, QO-1HT, HLO-1, QO-1PA, QO-1PL, PK-4FL, PK5FL, LP9618, NQB532, NQB544, NQB550, NQC32, NQC44, NQC50, QOTHT, QO3HT, QO1LO, QOHPL, QOTHPA, GFI2PA, QO1HPL, QO1PAF, QOADV1PAF, QO2PAF, QOGFI2PAF, QO2DTI, QO2DTIM

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00914	**NQOD4**	NQOD main circuit breaker adapter kit, 400 A, LA/LH (Q4)	LAL, LHL (p.13-13); LAL, LHL, Q4L (p.13-11) A	discontinued - no NQOD main breaker kits offered
EDH-SQD-00913	**NQODJK**	NQOD main circuit breaker adapter kit, 225 A, J/KI-frame	JDL, JGL, JJL, JLL, KIL A	discontinued - Schneider no longer offers any main breaker k
EDH-SQD-00912	**NQODQ2**	NQOD main circuit breaker adapter kit, Q2-frame (Q2L)	Q2L only per UL listing; PowerPacT QBL/QDL/QGL physically fit but may A	discontinued; replacement NQODQB also obsolete
EDH-SQD-00911	**NQODQB**	NQOD main circuit breaker adapter kit, 225 A, PowerPacT Q-frame	QBL, QDL, QGL, QJL (PowerPacT Q-frame only) A	discontinued - obsolete with no replacement

EDH-SQD-00914 **NQOD4** Square D main-breaker-kit **DISCONTINUED - NO NQOD**

NQOD main circuit breaker adapter kit, 400 A, LA/LH (Q4)

OEM part number	NQOD4	A	S609 2009 Digest 13-11 / 13-13 Table 13.3; oem_spec
Description	Main circuit breaker adapter kit (less breaker), 400 A, for 20 in NQOD panelboards	A	S609 oem_spec
Breaker compatibility	LAL, LHL (p.13-13); LAL, LHL, Q4L (p.13-11)	A	same as above
Current rating	400 A	A	same as above
Status	discontinued - no NQOD main breaker kits offered	A	S610 oem_spec
Cross-links	Families: NQOD · Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		

EDH-SQD-00913	NQODJK	Square D	main-breaker-kit	DISCONTINUED - SCHNEID

NQOD main circuit breaker adapter kit, 225 A, J/KI-frame

OEM part number	NQODJK	A	S609 2009 Digest 13-11/13-12/13-13 Table 13.3; oem_spec
Description	Main circuit breaker adapter kit (less breaker), 225 A, list price $780 (2009)	A	S609 oem_spec
Breaker compatibility	JDL, JGL, JJL, JLL, KIL	A	same as above
Current rating	225 A	A	same as above
Status	discontinued - Schneider no longer offers any main breaker kits for NQOD panelboards	A	S610 FA299520; oem_spec
Cross-links	Families: NQOD · Breakers: PowerPacT J-frame (JD/JG/JJ/JL/JR), Square D KA/KH/KC/KI (K-frame 250 A)		

EDH-SQD-00912	NQODQ2	Square D	main-breaker-kit	DISCONTINUED; REPLACEM

NQOD main circuit breaker adapter kit, Q2-frame (Q2L)

OEM part number	NQODQ2	A	S610 FA104089; FA299520; oem_spec
Description	NQOD Main Circuit Breaker Adapter Kit (less breaker) for Q2 frame breakers; UL listing strictly for Q2 frame	A	S610, S611 oem_spec
Breaker compatibility	Q2L only per UL listing; PowerPacT QBL/QDL/QGL physically fit but may void UL - owner/installer to decide	A	S610 oem_spec
Status	discontinued; replacement NQODQB also obsolete	A	S611, S613 oem_spec
Replacement / successor	NQODQB (itself obsolete); upgrade to NQ panelboard	A	S610, S611 oem_spec
Cross-links	Families: NQOD		

EDH-SQD-00911	NQODQB	Square D	main-breaker-kit	DISCONTINUED - OBSOLET

NQOD main circuit breaker adapter kit, 225 A, PowerPacT Q-frame

OEM part number	NQODQB	A	S609 2009 Digest 13-11 / 13-12 / 13-13 Table 13.3; oem_spec
Alternate / superseded numbers	NQODQ2 (NQODQB was the recommended replacement for NQODQ2 (Q2 frame))	A	S610, S611 supersedes; oem_spec
Description	Main circuit breaker adapter kit (less circuit breaker), 225 A, for NQOD 14 in and 20 in panelboards	A	S609 oem_spec
Breaker compatibility	QBL, QDL, QGL, QJL (PowerPacT Q-frame only)	A	S609, S612 oem_spec
Current rating	225 A	A	S609 oem_spec
Status	discontinued - obsolete with no replacement	A	S611, S612 FA104089, FAQ000265182; oem_spec
Replacement / successor	None; replace panelboard with current NQ	A	S610, S613 oem_spec
Cross-links	Families: NQOD · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ)		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00915	**NQOD100SFL**	NQOD sub-feed lug kit, 100 A, main lugs only, 1 or 3 phase	—	unknown
EDH-SQD-00916	**NQOD225SFL**	NQOD sub-feed lug kit, 225 A, main lugs only, 1 or 3 phase	—	unknown

EDH-SQD-00915	NQOD100SFL	Square D	sub-feed-lug-kit	STATUS UNKNOWN

NQOD sub-feed lug kit, 100 A, main lugs only, 1 or 3 phase

OEM part number	NQOD100SFL	A	S609 2009 Digest 13-10 Table 13.2; oem_spec
Description	Sub-feed lug kit, main lugs only interiors, 1-phase or 3-phase, 100 A (list $155.00, 2009); 42-circuit MLO with SFL requires MH38 box, 54-circuit requires MH44	A	S609 oem_spec
Current rating	100 A	A	same as above
Cross-links	Families: NQOD		

EDH-SQD-00916	NQOD225SFL	Square D	sub-feed-lug-kit	STATUS UNKNOWN

NQOD sub-feed lug kit, 225 A, main lugs only, 1 or 3 phase

OEM part number	NQOD225SFL	A	S609 2009 Digest 13-10 Table 13.2; oem_spec
Description	Sub-feed lug kit, main lugs only interiors, 1-phase or 3-phase, 225 A (list $203.00, 2009); 42-circuit MLO with SFL requires MH38 box, 54-circuit requires MH44	A	S609 oem_spec
Current rating	225 A	A	same as above
Cross-links	Families: NQOD		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00043	**SKNQOD225**	NQOD branch connector kit, 225 A max, 3-phase	—	discontinued (distributor)

EDH-SQD-00043	SKNQOD225	Square D	branch-connector-kit	DISCONTINUED (DISTRIBU

NQOD branch connector kit, 225 A max, 3-phase

OEM part number	SKNQOD225	A	S85 oem_spec
Description	Connector kit containing branch connectors for NQOD panelboards rated 225 A or less; A, B, C phase connectors and mounting hardware	A	same as above
Application	branch	A	same as above
Kit contents	80110-005-01 A/C phase bus finger; 80110-006-01 B phase bus finger; 80025-068-01 screw (all phases)	A	S86 oem_spec
Status	discontinued (distributor)	C	S92 distributor
Replacement / successor	No OEM replacement kit identified; NQOD interiors to be replaced by NQ (interior+box+trim)	B	S88, S89 inference
Aftermarket / reproduction	Reproduction of 80110-005-01/-006-01 fingers is a candidate; no listed equivalent	D	inference
Cross-links	Families: NQOD · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Was there a 400 A NQOD connector kit (e.g. SKNQOD400)? Not found*		
Open question	*Is SKNQBC physically interchangeable with NQOD fingers? Unverified - do not assume*		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00616	**PK15GTA**	Equipment ground bar kit PK15GTA (24 circuit 225 A max)	—	unknown
EDH-SQD-00617	**PK15GTAL**	Equipment ground bar kit PK15GTAL (PK15GTA with #1 to 4/0 Al/Cu lug)	—	unknown
EDH-SQD-00618	**PK18GTAL**	Equipment ground bar kit PK18GTAL (PK18GTA with #1 to 4/0 Al/Cu lug)	—	unknown

EDH-SQD-00616	PK15GTA	Square D	ground-bar	STATUS UNKNOWN

Equipment ground bar kit PK15GTA (24 circuit 225 A max)

OEM part number	PK15GTA	A	S609 13-10 Table 13.2; oem_spec
Description	Equipment ground bar: 24 circuit 225 A max	A	S609 oem_spec
Cross-links	Families: NQOD		

EDH-SQD-00617	PK15GTAL	Square D	ground-bar	STATUS UNKNOWN

Equipment ground bar kit PK15GTAL (PK15GTA with #1 to 4/0 Al/Cu lug)

OEM part number	PK15GTAL	A	S609 13-10 Table 13.2; oem_spec
Description	Equipment ground bar: PK15GTA with #1 to 4/0 Al/Cu lug	A	S609 oem_spec
Cross-links	Families: NQOD		

EDH-SQD-00618	PK18GTAL	Square D	ground-bar	STATUS UNKNOWN

Equipment ground bar kit PK18GTAL (PK18GTA with #1 to 4/0 Al/Cu lug)

OEM part number	PK18GTAL	A	S609 13-10 Table 13.2; oem_spec
Description	Equipment ground bar: PK18GTA with #1 to 4/0 Al/Cu lug	A	S609 oem_spec
Cross-links	Families: NQOD		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00716	**MHC23**	NQOD MONO-FLAT front for MH23 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00717	**MHC26**	NQOD MONO-FLAT front for MH26 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00718	**MHC29**	NQOD MONO-FLAT front for MH29 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00719	**MHC32**	NQOD MONO-FLAT front for MH32 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00720	**MHC35**	NQOD MONO-FLAT front for MH35 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00721	**MHC38**	NQOD MONO-FLAT front for MH38 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00722	**MHC41**	NQOD MONO-FLAT front for MH41 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00723	**MHC44**	NQOD MONO-FLAT front for MH44 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00724	**MHC50**	NQOD MONO-FLAT front for MH50 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00726	**MHC50V**	NQOD MONO-FLAT front for MH50 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00727	**MHC53V**	NQOD MONO-FLAT front for MH53 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00725	**MHC56**	NQOD MONO-FLAT front for MH56 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00728	**MHC56V**	NQOD MONO-FLAT front for MH56 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00729	**MHC59V**	NQOD MONO-FLAT front for MH59 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00730	**MHC62V**	NQOD MONO-FLAT front for MH62 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00731	**MHC65V**	NQOD MONO-FLAT front for MH65 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00732	**MHC68V**	NQOD MONO-FLAT front for MH68 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00733	**MHC74V**	NQOD MONO-FLAT front for MH74 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00734	**MHC77V**	NQOD MONO-FLAT front for MH77 box (F/S)	—	Listed in 2009 'Obsolescent Panelboards' section
EDH-SQD-00746	**NQC20**	MONO-FLAT front for 14 in wide NQB520 box (F/S)	—	unknown
EDH-SQD-00747	**NQC23**	MONO-FLAT front for 14 in wide NQB523 box (F/S)	—	unknown
EDH-SQD-00748	**NQC26**	MONO-FLAT front for 14 in wide NQB526 box (F/S)	—	unknown
EDH-SQD-00749	**NQC29**	MONO-FLAT front for 14 in wide NQB529 box (F/S)	—	unknown
EDH-SQD-00751	**NQC35**	MONO-FLAT front for 14 in wide NQB535 box (F/S)	—	unknown
EDH-SQD-00753	**NQC41**	MONO-FLAT front for 14 in wide NQB541 box (F/S)	—	unknown
EDH-SQD-00756	**NQC56**	MONO-FLAT front for 14 in wide NQB556 box (F/S)	—	unknown

EDH-SQD-00716 MHC23 Square D trim LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH23 box (F/S)

OEM part number	MHC23	**A**	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH23 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	**A**	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	**A**	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	**C**	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00717 MHC26 Square D trim LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH26 box (F/S)

OEM part number	MHC26	**A**	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH26 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	**A**	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	**A**	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	**C**	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00718 MHC29 Square D trim LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH29 box (F/S)

OEM part number	MHC29	**A**	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH29 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	**A**	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	**A**	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	**C**	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00719	MHC32	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH32 box (F/S)

OEM part number	MHC32	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH32 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00720	MHC35	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH35 box (F/S)

OEM part number	MHC35	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH35 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00721	MHC38	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH38 box (F/S)

OEM part number	MHC38	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH38 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00722	MHC41	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH41 box (F/S)

OEM part number	MHC41	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH41 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00723	MHC44	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH44 box (F/S)

OEM part number	MHC44	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH44 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00724	MHC50	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH50 box (F/S)

OEM part number	MHC50	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH50 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00726	MHC50V	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH50 box (F/S)

OEM part number	MHC50V	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH50 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00727	MHC53V	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH53 box (F/S)

OEM part number	MHC53V	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH53 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00725	MHC56	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH56 box (F/S)

OEM part number	MHC56	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH56 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00728	MHC56V	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH56 box (F/S)

OEM part number	MHC56V	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH56 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00729	MHC59V	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH59 box (F/S)

OEM part number	MHC59V	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH59 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00730	MHC62V	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH62 box (F/S)

OEM part number	MHC62V	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH62 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00731	MHC65V	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH65 box (F/S)

OEM part number	MHC65V	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH65 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00732	MHC68V	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH68 box (F/S)

OEM part number	MHC68V	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH68 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00733	MHC74V	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH74 box (F/S)

OEM part number	MHC74V	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH74 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00734	MHC77V	Square D	trim	LISTED IN 2009 'OBSOLE

NQOD MONO-FLAT front for MH77 box (F/S)

OEM part number	MHC77V	A	S609 2009 Digest 13-10, 13-11, 13-13; oem_spec
Description	MONO-FLAT front for 20 in W x 5.75 in D MH77 box on NQOD panelboards; add F for flush, S for surface (e.g. MHC32S in selection example)	A	S609 oem_spec
Status	Listed in 2009 'Obsolescent Panelboards' section	A	same as above
Replacement / successor	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches (Interchange of NC fronts on legacy MH boxes not confirmed by OEM)	C	S609, S27 inference
Cross-links	Families: NQOD		
Not yet documented	Dimensions, fit of current NC trims		

EDH-SQD-00746	NQC20	Square D	trim	STATUS UNKNOWN

MONO-FLAT front for 14 in wide NQB520 box (F/S)

OEM part number	NQC20	A	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Alternate / superseded numbers	NQC20F / NQC20S	A	S609 alias; oem_spec
Description	MONO-FLAT front for 14 in W box NQB520; add F (flush) / S (surface); hinged front N/A for NQ14	A	same as above
Cross-links	Families: NQOD		

EDH-SQD-00747	NQC23	Square D	trim	STATUS UNKNOWN

MONO-FLAT front for 14 in wide NQB523 box (F/S)

OEM part number	NQC23	A	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Alternate / superseded numbers	NQC23F / NQC23S	A	S609 alias; oem_spec
Description	MONO-FLAT front for 14 in W box NQB523; add F (flush) / S (surface); hinged front N/A for NQ14	A	same as above
Cross-links	Families: NQOD		

EDH-SQD-00748	NQC26	Square D	trim	STATUS UNKNOWN

MONO-FLAT front for 14 in wide NQB526 box (F/S)

OEM part number	NQC26	A	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Alternate / superseded numbers	NQC26F / NQC26S	A	S609 alias; oem_spec
Description	MONO-FLAT front for 14 in W box NQB526; add F (flush) / S (surface); hinged front N/A for NQ14	A	same as above
Cross-links	Families: NQOD		

EDH-SQD-00749	NQC29	Square D	trim	STATUS UNKNOWN

MONO-FLAT front for 14 in wide NQB529 box (F/S)

OEM part number	NQC29	A	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Alternate / superseded numbers	NQC29F / NQC29S	A	S609 alias; oem_spec
Description	MONO-FLAT front for 14 in W box NQB529; add F (flush) / S (surface); hinged front N/A for NQ14	A	same as above
Cross-links	Families: NQOD		

EDH-SQD-00751	NQC35	Square D	trim	STATUS UNKNOWN

MONO-FLAT front for 14 in wide NQB535 box (F/S)

OEM part number	NQC35	A	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Alternate / superseded numbers	NQC35F / NQC35S	A	S609 alias; oem_spec
Description	MONO-FLAT front for 14 in W box NQB535; add F (flush) / S (surface); hinged front N/A for NQ14	A	same as above
Cross-links	Families: NQOD		

EDH-SQD-00753	NQC41	Square D	trim	STATUS UNKNOWN

MONO-FLAT front for 14 in wide NQB541 box (F/S)

OEM part number	NQC41	A	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Alternate / superseded numbers	NQC41F / NQC41S	A	S609 alias; oem_spec
Description	MONO-FLAT front for 14 in W box NQB541; add F (flush) / S (surface); hinged front N/A for NQ14	A	same as above
Cross-links	Families: NQOD		

EDH-SQD-00756	NQC56	Square D	trim	STATUS UNKNOWN

MONO-FLAT front for 14 in wide NQB556 box (F/S)

OEM part number	NQC56	A	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Alternate / superseded numbers	NQC56F / NQC56S	A	S609 alias; oem_spec
Description	MONO-FLAT front for 14 in W box NQB556; add F (flush) / S (surface); hinged front N/A for NQ14	A	same as above
Cross-links	Families: NQOD		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00612	**8011010401**	Endwall for MH boxes - with knockouts (NQOD era)	—	unknown
EDH-SQD-00611	**8011010501**	Endwall for MH boxes - blank (NQOD era)	—	unknown
EDH-SQD-00632	**MH23**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 23 in H	—	Size listed only in 2009 obsolescent NQOD tables; not in 202
EDH-SQD-00652	**MH23WP**	MH weatherproof enclosure Type 3R/5/12, 23 in H (NQ/NF)	—	unknown
EDH-SQD-00634	**MH29**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 29 in H	—	Size listed only in 2009 obsolescent NQOD tables; not in 202
EDH-SQD-00654	**MH29WP**	MH weatherproof enclosure Type 3R/5/12, 29 in H (NQ/NF)	—	unknown
EDH-SQD-00636	**MH35**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 35 in H	—	Size listed only in 2009 obsolescent NQOD tables; not in 202
EDH-SQD-00656	**MH35WP**	MH weatherproof enclosure Type 3R/5/12, 35 in H (NQ/NF)	—	unknown
EDH-SQD-00638	**MH41**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 41 in H	—	Size listed only in 2009 obsolescent NQOD tables; not in 202
EDH-SQD-00658	**MH41WP**	MH weatherproof enclosure Type 3R/5/12, 41 in H (NQ/NF)	—	unknown
EDH-SQD-00641	**MH53**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 53 in H	—	Size listed only in 2009 obsolescent NQOD tables; not in 202
EDH-SQD-00661	**MH53WP**	MH weatherproof enclosure Type 3R/5/12, 53 in H (NQ/NF)	—	unknown
EDH-SQD-00643	**MH59**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 59 in H	—	Size listed only in 2009 obsolescent NQOD tables; not in 202
EDH-SQD-00663	**MH59WP**	MH weatherproof enclosure Type 3R/5/12, 59 in H (NQ/NF)	—	unknown
EDH-SQD-00645	**MH65**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 65 in H	—	Size listed only in 2009 obsolescent NQOD tables; not in 202
EDH-SQD-00671	**MH656WP**	MH weatherproof enclosure for 600 A NQOD interior (MH656WP)	—	unknown
EDH-SQD-00665	**MH65WP**	MH weatherproof enclosure Type 3R/5/12, 65 in H (NQ/NF)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00672	**MH686WP**	MH weatherproof enclosure for 600 A NQOD interior (MH686WP)	—	unknown
EDH-SQD-00673	**MH716WP**	MH weatherproof enclosure for 600 A NQOD interior (MH716WP)	—	unknown
EDH-SQD-00674	**MH746WP**	MH weatherproof enclosure for 600 A NQOD interior (MH746WP)	—	unknown
EDH-SQD-00648	**MH77**	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 77 in H	—	Size listed only in 2009 obsolescent NQOD tables; not in 202
EDH-SQD-00668	**MH77WP**	MH weatherproof enclosure Type 3R/5/12, 77 in H (NQ/NF)	—	unknown
EDH-SQD-00735	**NQB520**	14 in wide panelboard box, 14 in W x 5.75 in D x 20 in H (NQ14 / NQOD 14 in)	—	unknown
EDH-SQD-00736	**NQB523**	14 in wide panelboard box, 14 in W x 5.75 in D x 23 in H (NQ14 / NQOD 14 in)	—	unknown
EDH-SQD-00737	**NQB526**	14 in wide panelboard box, 14 in W x 5.75 in D x 26 in H (NQ14 / NQOD 14 in)	—	unknown
EDH-SQD-00738	**NQB529**	14 in wide panelboard box, 14 in W x 5.75 in D x 29 in H (NQ14 / NQOD 14 in)	—	unknown
EDH-SQD-00740	**NQB535**	14 in wide panelboard box, 14 in W x 5.75 in D x 35 in H (NQ14 / NQOD 14 in)	—	unknown
EDH-SQD-00742	**NQB541**	14 in wide panelboard box, 14 in W x 5.75 in D x 41 in H (NQ14 / NQOD 14 in)	—	unknown
EDH-SQD-00745	**NQB556**	14 in wide panelboard box, 14 in W x 5.75 in D x 56 in H (NQ14 / NQOD 14 in)	—	unknown

EDH-SQD-00612 **8011010401** Square D box/enclosure **STATUS UNKNOWN**

Endwall for MH boxes - with knockouts (NQOD era)

OEM part number	8011010401	**A**	S609 13-10 Table 13.2; oem_spec
Description	Endwall for MH boxes - with knockouts	**A**	S609 oem_spec
Replacement / successor	Current equivalents MHBE20 (blank) / MHKE20 (knockouts) 'one per package' for 20 in MH enclosures (Functional correspondence inferred; not stated by OEM)	**C**	S609, S27 inference
Cross-links	Families: NQOD		

EDH-SQD-00611 **8011010501** Square D box/enclosure **STATUS UNKNOWN**

Endwall for MH boxes - blank (NQOD era)

OEM part number	8011010501	**A**	S609 13-10 Table 13.2; oem_spec
Description	Endwall for MH boxes - blank	**A**	S609 oem_spec
Replacement / successor	Current equivalents MHBE20 (blank) / MHKE20 (knockouts) 'one per package' for 20 in MH enclosures (Functional correspondence inferred; not stated by OEM)	**C**	S609, S27 inference
Cross-links	Families: NQOD		

EDH-SQD-00632	MH23	Square D	box/enclosure	SIZE LISTED ONLY IN 20

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 23 in H

OEM part number	MH23	A	S609 ; 2009 Digest 13-10/13-11/13-13; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 23 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 23 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Status	Size listed only in 2009 obsolescent NQOD tables; not in 2026 NQ/NF tables (which use 6 in increments)	B	S609 inference
Cross-links	Families: NQOD		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00652	MH23WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 23 in H (NQ/NF)

OEM part number	MH23WP	A	S609 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 23 in	A	S609 oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	same as above
Cross-links	Families: NQOD		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00634	MH29	Square D	box/enclosure	SIZE LISTED ONLY IN 20

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 29 in H

OEM part number	MH29	A	S609 ; 2009 Digest 13-10/13-11/13-13; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 29 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 29 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Status	Size listed only in 2009 obsolescent NQOD tables; not in 2026 NQ/NF tables (which use 6 in increments)	B	S609 inference
Cross-links	Families: NQOD		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00654	MH29WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 29 in H (NQ/NF)

OEM part number	MH29WP	A	S609 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 29 in	A	S609 oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	same as above
Cross-links	Families: NQOD		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00636	MH35	Square D	box/enclosure	SIZE LISTED ONLY IN 20

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 35 in H

OEM part number	MH35	A	S609 ; 2009 Digest 13-10/13-11/13-13; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 35 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 35 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Status	Size listed only in 2009 obsolescent NQOD tables; not in 2026 NQ/NF tables (which use 6 in increments)	B	S609 inference
Cross-links	Families: NQOD		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00656	MH35WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 35 in H (NQ/NF)

OEM part number	MH35WP	A	S609 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 35 in	A	S609 oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	same as above
Cross-links	Families: NQOD		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00638	MH41	Square D	box/enclosure	SIZE LISTED ONLY IN 20

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 41 in H

OEM part number	MH41	A	S609 ; 2009 Digest 13-10/13-11/13-13; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 41 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 41 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Status	Size listed only in 2009 obsolescent NQOD tables; not in 2026 NQ/NF tables (which use 6 in increments)	B	S609 inference
Cross-links	Families: NQOD		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00658	MH41WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 41 in H (NQ/NF)

OEM part number	MH41WP	A	S609 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 41 in	A	S609 oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	same as above
Cross-links	Families: NQOD		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00641	MH53	Square D	box/enclosure	SIZE LISTED ONLY IN 20

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 53 in H

OEM part number	MH53	A	S609 ; 2009 Digest 13-10/13-11/13-13; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 53 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 53 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Status	Size listed only in 2009 obsolescent NQOD tables; not in 2026 NQ/NF tables (which use 6 in increments)	B	S609 inference
Cross-links	Families: NQOD		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00661	MH53WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 53 in H (NQ/NF)

OEM part number	MH53WP	A	S609 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 53 in	A	S609 oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	same as above
Cross-links	Families: NQOD		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00643	MH59	Square D	box/enclosure	SIZE LISTED ONLY IN 20

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 59 in H

OEM part number	MH59	A	S609 ; 2009 Digest 13-10/13-11/13-13; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 59 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 59 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Status	Size listed only in 2009 obsolescent NQOD tables; not in 2026 NQ/NF tables (which use 6 in increments)	B	S609 inference
Cross-links	Families: NQOD		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00663	MH59WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 59 in H (NQ/NF)

OEM part number	MH59WP	A	S609 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 59 in	A	S609 oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	same as above
Cross-links	Families: NQOD		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00645	MH65	Square D	box/enclosure	SIZE LISTED ONLY IN 20

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 65 in H

OEM part number	MH65	A	S609 ; 2009 Digest 13-10/13-11/13-13; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 65 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 65 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Status	Size listed only in 2009 obsolescent NQOD tables; not in 2026 NQ/NF tables (which use 6 in increments)	B	S609 inference
Cross-links	Families: NQOD		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00671	MH656WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure for 600 A NQOD interior (MH656WP)

OEM part number	MH656WP	A	S600 80043-455-04 p.6; 2009 Digest 13-10; oem_spec
Description	Weatherproof MH enclosure that must be used when installing a 600 A NQOD panelboard interior; provides hardware for interior mounting (rail extension mounting pan, 1/4-20 x 3/4 in self-tapping screws, 70 lb-in) and trim application ; 2009 Digest pairs it with NEMA 1 / WP heights 53/65 in	A	S600, S609 oem_spec
Torque values	Rail extension mounting pan screws 70 lb-in (8 N-m)	A	S600 oem_spec
Cross-links	Families: NQOD		
Not yet documented	Dimensions		

EDH-SQD-00665	MH65WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 65 in H (NQ/NF)

OEM part number	MH65WP	A	S609 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 65 in	A	S609 oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	same as above
Cross-links	Families: NQOD		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00672	MH686WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure for 600 A NQOD interior (MH686WP)

OEM part number	MH686WP	A	S600 80043-455-04 p.6; 2009 Digest 13-10; oem_spec
Description	Weatherproof MH enclosure that must be used when installing a 600 A NQOD panelboard interior; provides hardware for interior mounting (rail extension mounting pan, 1/4-20 x 3/4 in self-tapping screws, 70 lb-in) and trim application ; 2009 Digest pairs it with NEMA 1 / WP heights 56/68 in	A	S600, S609 oem_spec
Torque values	Rail extension mounting pan screws 70 lb-in (8 N-m)	A	S600 oem_spec
Cross-links	Families: NQOD		
Not yet documented	Dimensions		

EDH-SQD-00673	MH716WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure for 600 A NQOD interior (MH716WP)

OEM part number	MH716WP	A	S600 80043-455-04 p.6; 2009 Digest 13-10; oem_spec
Description	Weatherproof MH enclosure that must be used when installing a 600 A NQOD panelboard interior; provides hardware for interior mounting (rail extension mounting pan, 1/4-20 x 3/4 in self-tapping screws, 70 lb-in) and trim application	A	S600 oem_spec
Torque values	Rail extension mounting pan screws 70 lb-in (8 N-m)	A	same as above
Cross-links	Families: NQOD		
Not yet documented	Dimensions		

EDH-SQD-00674	MH746WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure for 600 A NQOD interior (MH746WP)

OEM part number	MH746WP	A	S600 80043-455-04 p.6; 2009 Digest 13-10; oem_spec
Description	Weatherproof MH enclosure that must be used when installing a 600 A NQOD panelboard interior; provides hardware for interior mounting (rail extension mounting pan, 1/4-20 x 3/4 in self-tapping screws, 70 lb-in) and trim application ; 2009 Digest pairs it with NEMA 1 / WP heights 62/74 in	A	S600, S609 oem_spec
Torque values	Rail extension mounting pan screws 70 lb-in (8 N-m)	A	S600 oem_spec
Cross-links	Families: NQOD		
Not yet documented	Dimensions		

EDH-SQD-00648	MH77	Square D	box/enclosure	SIZE LISTED ONLY IN 20

MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 77 in H

OEM part number	MH77	A	S609 ; 2009 Digest 13-10/13-11/13-13; oem_spec
Description	Square D MH NEMA Type 1 panelboard box (enclosure), 20 in W x 5.75 in D, nominal 77 in high; galvanized steel with removable endwalls; used for NQ/NF and NQOD panelboards	A	S609 oem_spec
Installation location	Wall / flush or surface mounted enclosure; front (trim) ordered separately (NC or MHC series)	A	same as above
Dimensions	20 in W x 5.75 in D x 77 in H (nominal; detailed dims per PBA600 / PBA711 drawings) (Embossed mounting holes add 0.25 in standoff to back of MH box (2009 Digest note b))	A	same as above
Status	Size listed only in 2009 obsolescent NQOD tables; not in 2026 NQ/NF tables (which use 6 in increments)	B	S609 inference
Cross-links	Families: NQOD		
Not yet documented	gauge, knockout pattern		

EDH-SQD-00668	MH77WP	Square D	box/enclosure	STATUS UNKNOWN

MH weatherproof enclosure Type 3R/5/12, 77 in H (NQ/NF)

OEM part number	MH77WP	A	S609 80043-771-01 kit table; Digest Table 9.3; 2009 Digest 13-10..13-13; oem_spec
Description	MH weatherproof / dust-resistant enclosure (NEMA Type 3R/5/12), includes trim kit; for NQ/NF (and NQOD) panelboards; nominal height 77 in	A	S609 oem_spec
Dimensions	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) (Wall brackets add 0.4 in to back of MHxxWP enclosures (Digest note [6]))	A	same as above
Cross-links	Families: NQOD		
Not yet documented	Finish / plating, gauge		

EDH-SQD-00735	NQB520	Square D	box/enclosure	STATUS UNKNOWN

14 in wide panelboard box, 14 in W x 5.75 in D x 20 in H (NQ14 / NQOD 14 in)

OEM part number	NQB520	**A**	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Description	NEMA 1 box 14 in W x 5.75 in D, 20 in high; 14 in wide cabinets accept 100 A max branch breakers; all 14 in W boxes come with blank endwalls (2026 Digest note [61]); through-feed lugs not available in 14 in enclosures	**A**	S609 oem_spec
Dimensions	14 in W x 5.75 in D x 20 in H (nominal)	**A**	same as above
Cross-links	Families: NQOD		

EDH-SQD-00736	NQB523	Square D	box/enclosure	STATUS UNKNOWN

14 in wide panelboard box, 14 in W x 5.75 in D x 23 in H (NQ14 / NQOD 14 in)

OEM part number	NQB523	**A**	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Description	NEMA 1 box 14 in W x 5.75 in D, 23 in high; 14 in wide cabinets accept 100 A max branch breakers; all 14 in W boxes come with blank endwalls (2026 Digest note [61]); through-feed lugs not available in 14 in enclosures	**A**	S609 oem_spec
Dimensions	14 in W x 5.75 in D x 23 in H (nominal)	**A**	same as above
Cross-links	Families: NQOD		

EDH-SQD-00737	NQB526	Square D	box/enclosure	STATUS UNKNOWN

14 in wide panelboard box, 14 in W x 5.75 in D x 26 in H (NQ14 / NQOD 14 in)

OEM part number	NQB526	**A**	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Description	NEMA 1 box 14 in W x 5.75 in D, 26 in high; 14 in wide cabinets accept 100 A max branch breakers; all 14 in W boxes come with blank endwalls (2026 Digest note [61]); through-feed lugs not available in 14 in enclosures	**A**	S609 oem_spec
Dimensions	14 in W x 5.75 in D x 26 in H (nominal)	**A**	same as above
Cross-links	Families: NQOD		

EDH-SQD-00738	NQB529	Square D	box/enclosure	STATUS UNKNOWN

14 in wide panelboard box, 14 in W x 5.75 in D x 29 in H (NQ14 / NQOD 14 in)

OEM part number	NQB529	**A**	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Description	NEMA 1 box 14 in W x 5.75 in D, 29 in high; 14 in wide cabinets accept 100 A max branch breakers; all 14 in W boxes come with blank endwalls (2026 Digest note [61]); through-feed lugs not available in 14 in enclosures	**A**	S609 oem_spec
Dimensions	14 in W x 5.75 in D x 29 in H (nominal)	**A**	same as above
Cross-links	Families: NQOD		

EDH-SQD-00740	NQB535	Square D	box/enclosure	STATUS UNKNOWN

14 in wide panelboard box, 14 in W x 5.75 in D x 35 in H (NQ14 / NQOD 14 in)

OEM part number	NQB535	**A**	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Description	NEMA 1 box 14 in W x 5.75 in D, 35 in high; 14 in wide cabinets accept 100 A max branch breakers; all 14 in W boxes come with blank endwalls (2026 Digest note [61]); through-feed lugs not available in 14 in enclosures	**A**	S609 oem_spec
Dimensions	14 in W x 5.75 in D x 35 in H (nominal)	**A**	same as above
Cross-links	Families: NQOD		

EDH-SQD-00742	NQB541	Square D	box/enclosure	STATUS UNKNOWN

14 in wide panelboard box, 14 in W x 5.75 in D x 41 in H (NQ14 / NQOD 14 in)

OEM part number	NQB541	A	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Description	NEMA 1 box 14 in W x 5.75 in D, 41 in high; 14 in wide cabinets accept 100 A max branch breakers; all 14 in W boxes come with blank endwalls (2026 Digest note [61]); through-feed lugs not available in 14 in enclosures	A	S609 oem_spec
Dimensions	14 in W x 5.75 in D x 41 in H (nominal)	A	same as above
Cross-links	Families: NQOD		

EDH-SQD-00745	NQB556	Square D	box/enclosure	STATUS UNKNOWN

14 in wide panelboard box, 14 in W x 5.75 in D x 56 in H (NQ14 / NQOD 14 in)

OEM part number	NQB556	A	S609 Digest Sec.9 Tables 9.5/9.6; 2009 Digest 13-12; oem_spec
Description	NEMA 1 box 14 in W x 5.75 in D, 56 in high; 14 in wide cabinets accept 100 A max branch breakers; all 14 in W boxes come with blank endwalls (2026 Digest note [61]); through-feed lugs not available in 14 in enclosures	A	S609 oem_spec
Dimensions	14 in W x 5.75 in D x 56 in H (nominal)	A	same as above
Cross-links	Families: NQOD		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00613	**2322000003**	Elevating nut for MH boxes (4 required)	—	unknown
EDH-SQD-00966	**LP9502**	Square D trim screws for 400-600 A panelboard fronts	—	unknown

EDH-SQD-00613	2322000003	Square D	fastener	STATUS UNKNOWN

Elevating nut for MH boxes (4 required)

OEM part number	2322000003	A	S609 13-10 Table 13.2; oem_spec
Description	Elevating Nuts (4 required)	A	S609 oem_spec
Cross-links	Families: NQOD		
Not yet documented	thread size		

EDH-SQD-00966	LP9502	Square D	fastener	STATUS UNKNOWN

Square D trim screws for 400-600 A panelboard fronts

OEM part number	LP9502	A	S644 p. 4, Enclosures; oem_spec
Description	Trim screws: fronts for 400-600 A interiors are vented and mount to the enclosure with trim screws (Catalog No. LP9502).	A	same as above
Installation location	Front-to-enclosure (MH box) for 400-600 A interiors	A	S644 p. 4; oem_spec
Cross-links	Families: NQOD, NQ		
Not yet documented	Dimensions, Material, Status		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00614	**8003115801**	Panelboard directory cards	—	unknown
EDH-SQD-00615	**8003115901**	Plastic stick-on directory pouch	—	unknown
EDH-SQD-00609	**PK22FL**	Lock for MONO-FLAT fronts (NQOD) / telephone cabinet fronts up to 30 in (after Nov 1997)	—	unknown
EDH-SQD-00965	**PK4NVL**	Square D vault handle with lock for Type 3R/5/12 panelboard enclosures	—	unknown

EDH-SQD-00614	8003115801	Square D	other	STATUS UNKNOWN

Panelboard directory cards

OEM part number	8003115801	A	S609 13-10; oem_spec
Description	Directory cards	A	S609 oem_spec
Cross-links	Families: NQOD		

EDH-SQD-00615	8003115901	Square D	other	STATUS UNKNOWN

Plastic stick-on directory pouch

OEM part number	8003115901	A	S609 13-10; oem_spec
Description	Plastic stick-on directory pouch (NC trims may be ordered with WMD suffix for metal directory frame instead)	A	S609, S27 oem_spec
Cross-links	Families: NQOD, NQ		

EDH-SQD-00609	PK22FL	Square D	other	STATUS UNKNOWN

Lock for MONO-FLAT fronts (NQOD) / telephone cabinet fronts up to 30 in (after Nov 1997)

OEM part number	PK22FL	A	S609 13-7 Table 13.3; 13-10 Table 13.2; oem_spec
Alternate / superseded numbers	PK4FL (For telephone cabinet fronts up to 30 in: PK4FL before Nov 1997, PK22FL after; PK4FL still listed for NEHB main lug and <=225 A MCB fronts)	A	S609 supersedes; 13-7 Table 13.3; oem_spec
Description	Lock for MONO-FLAT fronts (NQOD accessories); telephone cabinets: fronts on boxes up to 30 in wide after November 1997 (PK4FL before Nov 1997)	A	S609 oem_spec
Replacement / successor	Key NSR-251 is LP9618 (for all locks)	A	S609 13-10; oem_spec
Cross-links	Families: NQOD, NEHB		

EDH-SQD-00965	PK4NVL	Square D	other	STATUS UNKNOWN

Square D vault handle with lock for Type 3R/5/12 panelboard enclosures

OEM part number	PK4NVL	A	S644 p. 5, Type 3R, 5 and 12 Enclosures; oem_spec
Description	Vault handle with lock (uses NSR-251 key) for gasketed Type 3R, 5, 12 enclosure doors.	A	same as above
Cross-links	Families: NQOD, NQ		
Not yet documented	Dimensions, Material, Status		

4.12 QMB — QMB fusible panelboard (Class 4620)

FAM-SQD-007 · panelboard · aka Class 4620, QMB fusible, QMB switchboard, QMB-QMJ · markings: Schneider Electric, Square D

Square D fusible-switch panelboard/switchboard; QMBHW and QMBJW adapter units allow H- and J-frame breakers to plug onto QMB bus (spring nuts in mounting rails, 1/4-20 unit mounting screws at 30 lb-in). Included only for breaker-adapter hardware.

Extruded-bus fusible distribution system used both as stand-alone panelboards and as the QMB distribution section of QED-2 / Speed-D switchboards. Branch units have permanently attached mounting brackets and blow-on plug-on jaws onto the QMB bus and mount with a screwdriver; glass-reinforced polyester bus supports. ISCR up to 200 kA at 600 Vac with Class R/J/L/T fuses.

Attribute	Value	Cl.	Sources
Status	current	A	S96 oem_spec
	unknown	D	 inference
Era of manufacture	Catalog 4620CT9601 copyright 1985-2015; current design post-October 1984 (older QM/QW interiors pre-1984)	A	S96, S129 p. 1; oem_spec
Voltage rating	600 Vac / 250 Vdc max	A	S96 pp. 4, 7; oem_spec
Main ampacity	Main lug interiors 225-1200 A; main switch 200-800 A; QMJ only on 400, 600, 800, 1200 A interiors; QMB panelboards limited to 800 A main and branch switches (1200 A QMB368W only in QED-2)	A	S96, S94 pp. 6, 14; oem_spec

Attribute	Value	Cl.	Sources
Branch breakers accepted	QMB twin and single fusible switch units 30-800 A (1200 A in QED-2 only), QMJ Class J switch units 30-600 A, QMB circuit breaker units (twin H-frame HD/HG 15-150 A; single JD/JG 150-250 A and LA/LH 225-400 A), NEMA size 0-3 motor starter units, QMB Surgelogic TVSS	A	S96 pp. 6, 7, 14, 17-19; oem_spec
Standards	UL 67, UL 50, CSA C22.2 No. 29, NEMA PB 1, Fed Spec W-P115C; switch units UL 98 File E34358	A	S96 p. 4; oem_spec

Breaker families associated: QMB circuit breaker units (H-, J-, L-frame)

Key documents: S83 80043-339-04 QMBHW and QMBJW Circuit Breaker Adapter Units Installation, Class 4620; S94 2700CT1101 Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switc; S96 4620CT9601R07/15 QMB Fusible Panelboards Catalog, Class 4620; S129 FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified) QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T; S609 Digest Section 13 (2009); distributor file name Square_D_QM3890B_Catalog.pdf Square D Digest (2009) Section 13 - Obsolescent Panelboards (QMB RTI, QMB replacement unit

Also fits this family (entry printed elsewhere): S37444, S37445, AL150HD, AL175JD, AL250JD, AL400LA, CU150HD, CU250JD, CU400LA, QMB306LEX, QMB310LEX, QMB3400LA, QMB3300LA, QMB362T, QMB364, QMB323TD, PKDFSCREW

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00301	**QMB12CLA**	QMB main lug compression adaptor kit QMB12CLA (1200 A)	—	unknown
EDH-SQD-00300	**QMB8CLA**	QMB main lug compression adaptor kit QMB8CLA (800 A)	—	unknown

EDH-SQD-00301 **QMB12CLA** Square D main-lug-kit **STATUS UNKNOWN**

QMB main lug compression adaptor kit QMB12CLA (1200 A)

OEM part number	QMB12CLA	A	S96 Table 2, p. 6; oem_spec
Description	Adaptor kit for VCEL compression main lugs on 1200 A QMB main-lug interior (4 conductors/phase, VCEL050-12H1 2/0-500 or VCEL075-12H1 500-750 Al)	A	S96 Table 2; oem_spec
Application	main	A	S96 oem_spec
Current rating	1200 A	A	S96 Table 2; oem_spec
Cross-links	Families: QMB		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00300 **QMB8CLA** Square D main-lug-kit **STATUS UNKNOWN**

QMB main lug compression adaptor kit QMB8CLA (800 A)

OEM part number	QMB8CLA	A	S96 Table 2, p. 6; oem_spec
Description	Adaptor kit for VCEL compression main lugs on 800 A QMB main-lug interior (3 conductors/phase, VCEL050-12H1 2/0-500 or VCEL075-12H1 500-750 Al)	A	S96 Table 2; oem_spec
Application	main	A	S96 oem_spec
Current rating	800 A	A	S96 Table 2; oem_spec
Cross-links	Families: QMB		
Not yet documented	Dimensions, Kit contents		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00283	**40251-016-51**	QMB/QMJ switch terminal lug 40251-016-51	30 A and 60 A QMB switch units (std) A	unknown
EDH-SQD-00285	**40251-018-50**	QMB/QMJ switch terminal lug 40251-018-50	100 A 600 V QMB units (QMB263TW/HW, QMB363TW/HW, 100 A side of QMB363T A	unknown
EDH-SQD-00344	**4025101851**	QMB363TW Series E1 renewal part: Lug assembly	QMB363TW, Series E1 (E01) A	unknown
EDH-SQD-00287	**40251-162-50**	QMB/QMJ switch terminal lug 40251-162-50	200 A QMB units (QMB224W, QMB324W, QMB264W, QMB364W) A	unknown
EDH-SQD-00289	**40251-287-50**	QMB/QMJ switch terminal lug 40251-287-50	QMB225W, QMB325W, QMB326W, QMB365W, QMB366W, QMB327WT3, QMB367W A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00286	**40256-014-50**	QMB/QMJ switch terminal lug 40256-014-50	100 A 600 V QMB units; QMJ363T/H A	unknown
EDH-SQD-00284	**40256-034-50**	QMB/QMJ switch terminal lug 40256-034-50	30 A and 60 A QMB units; QMJ361T, QMJ362T A	unknown
EDH-SQD-00290	**40256-039-50**	QMB/QMJ switch terminal lug 40256-039-50	QMJ365 (400 A) A	unknown
EDH-SQD-00288	**40560-270-50**	QMB/QMJ switch terminal lug 40560-270-50	200 A QMB units; QMJ364T/H A	unknown
EDH-SQD-00294	**VCEL02114S1**	VERSA-CRIMP compression lug VCEL02114S1	100 A 600 V QMB units; QMJ363 A	unknown
EDH-SQD-00291	**VCEL030516H1**	VERSA-CRIMP compression lug VCEL030516H1	200 A QMB units optional; 200 A QMB main switch interior (Table 3); QM A	unknown
EDH-SQD-00292	**VCEL05012H1**	VERSA-CRIMP compression lug VCEL05012H1	400-800 A QMB units optional; QMB main lug and main switch interiors (A	unknown
EDH-SQD-00299	**VCEL06012H1**	VERSA-CRIMP compression lug VCEL06012H1	400 A QMB main switch interior (Table 3) A	unknown
EDH-SQD-00293	**VCEL07512H1**	VERSA-CRIMP compression lug VCEL07512H1	400-800 A QMB units optional; QMB main lug/main switch interiors; QMJ3 A	unknown
EDH-SQD-00295	**VCELC02114S1**	VERSA-CRIMP compression lug VCELC02114S1	100 A 600 V QMB units; QMJ363 A	unknown
EDH-SQD-00296	**VCELC03038H1**	VERSA-CRIMP compression lug VCELC03038H1	200 A QMB units; QMJ364 A	unknown
EDH-SQD-00297	**VCELC05012H1**	VERSA-CRIMP compression lug VCELC05012H1	400-800 A QMB units A	unknown
EDH-SQD-00298	**VCELC07512H1**	VERSA-CRIMP compression lug VCELC07512H1	400-800 A QMB units A	unknown

EDH-SQD-00283 — 40251-016-51 — Square D — lug — STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-016-51

OEM part number	40251-016-51	A	S96 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, #12-#2 AWG	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S96 oem_spec
Installation location	Load-side terminals of switch unit	C	S96 inference
Breaker compatibility	30 A and 60 A QMB switch units (std)	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00285 — 40251-018-50 — Square D — lug — STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-018-50

OEM part number	40251-018-50	A	S96 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, #12-1/0 AWG	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S96 oem_spec
Installation location	Load-side terminals of switch unit	C	S96 inference
Breaker compatibility	100 A 600 V QMB units (QMB263TW/HW, QMB363TW/HW, 100 A side of QMB363T31W/T32W)	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00344	4025101851	Square D	lug	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Lug assembly

OEM part number	4025101851	A	S130 oem_spec
Description	Lug assembly	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	A	same as above
Kit contents	Quantity: per lug	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00287	40251-162-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-162-50

OEM part number	40251-162-50	A	S96 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, #6 AWG-300 kcmil	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S96 oem_spec
Installation location	Load-side terminals of switch unit	C	S96 inference
Breaker compatibility	200 A QMB units (QMB224W, QMB324W, QMB264W, QMB364W)	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00289	40251-287-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-287-50

OEM part number	40251-287-50	A	S96, S131 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, 3/0 AWG-600 kcmil (2 per phase at 400/600 A, 3 per phase at 800 A)	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
	Lug assembly	A	S131 oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S96 oem_spec
	renewal part (field replaceable)	A	S131 oem_spec
Installation location	Load-side terminals of switch unit	C	S96 inference
Breaker compatibility	QMB225W, QMB325W, QMB326W, QMB365W, QMB366W, QMB327WT3, QMB367W	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
	QMB367W, Series E1 (E01)	A	S131 oem_spec
Kit contents	Quantity: 1 per lug	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00286	40256-014-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40256-014-50

OEM part number	40256-014-50	A	S96 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Optional Cu mechanical lug, #14-1/0 AWG	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S96 oem_spec
Installation location	Load-side terminals of switch unit	C	S96 inference
Breaker compatibility	100 A 600 V QMB units; QMJ363T/H	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00284	40256-034-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40256-034-50

OEM part number	40256-034-50	A	S96 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Optional Cu mechanical lug, #14-#4 AWG (QMB); QMJ361T/362T Cu lug #14-#2	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S96 oem_spec
Installation location	Load-side terminals of switch unit	C	S96 inference
Breaker compatibility	30 A and 60 A QMB units; QMJ361T, QMJ362T	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00290	40256-039-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40256-039-50

OEM part number	40256-039-50	A	S96 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Cu mechanical lug, 1/0 AWG-750 kcmil	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S96 oem_spec
Installation location	Load-side terminals of switch unit	C	S96 inference
Breaker compatibility	QMJ365 (400 A)	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00288	40560-270-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40560-270-50

OEM part number	40560-270-50	A	S96 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Optional Cu mechanical lug, #6 AWG-250 kcmil (QMB); #6-300 (QMJ364)	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S96 oem_spec
Installation location	Load-side terminals of switch unit	C	S96 inference
Breaker compatibility	200 A QMB units; QMJ364T/H	A	S96 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00294	VCEL02114S1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL02114S1

OEM part number	VCEL02114S1	A	S96 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL021-14S1 (Hyphenated form used in catalog tables)	A	S96 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug #8-1/0 AWG	A	S96 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S96 pp. 9, 15; oem_spec
Breaker compatibility	100 A 600 V QMB units; QMJ363	A	S96 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00291	VCEL030516H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL030516H1

OEM part number	VCEL030516H1	A	S96 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL030-516H1 (Hyphenated form used in catalog tables)	A	S96 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug #4 AWG-300 kcmil	A	S96 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S96 pp. 9, 15; oem_spec
Breaker compatibility	200 A QMB units optional; 200 A QMB main switch interior (Table 3); QMJ364 (VCEL-030-516H1)	A	S96 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00292	VCEL05012H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL05012H1

OEM part number	VCEL05012H1	A	S96 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL050-12H1 (Hyphenated form used in catalog tables)	A	S96 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug 2/0 AWG-500 kcmil	A	S96 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S96 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units optional; QMB main lug and main switch interiors (Tables 2, 3)	A	S96 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00299	VCEL06012H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL06012H1

OEM part number	VCEL06012H1	A	S96 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL060-12H1 (Hyphenated form used in catalog tables)	A	S96 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP compression lug 400-600 kcmil Al or Cu	A	S96 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S96 pp. 9, 15; oem_spec
Breaker compatibility	400 A QMB main switch interior (Table 3)	A	S96 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		
Open question	*VCEL060-12H1 appears only in Table 3 (no un-hyphenated catalog form printed) - confirm orderable number*		

EDH-SQD-00293	VCEL07512H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL07512H1

OEM part number	VCEL07512H1	A	S96 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL075-12H1 (Hyphenated form used in catalog tables)	A	S96 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug 500-750 kcmil Al	A	S96 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S96 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units optional; QMB main lug/main switch interiors; QMJ365	A	S96 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00295	VCELC02114S1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC02114S1

OEM part number	VCELC02114S1	A	S96 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC021-14S1 (Hyphenated form used in catalog tables)	A	S96 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug #6-1/0 AWG	A	S96 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S96 pp. 9, 15; oem_spec
Breaker compatibility	100 A 600 V QMB units; QMJ363	A	S96 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00296	VCELC03038H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC03038H1

OEM part number	VCELC03038H1	A	S96 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC030-38H1 (Hyphenated form used in catalog tables)	A	S96 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug 2/0-300	A	S96 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S96 pp. 9, 15; oem_spec
Breaker compatibility	200 A QMB units; QMJ364	A	S96 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00297	VCELC05012H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC05012H1

OEM part number	VCELC05012H1	A	S96 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC050-12H1 (Hyphenated form used in catalog tables)	A	S96 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug 250-500 kcmil	A	S96 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S96 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units	A	S96 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00298	VCELC07512H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC07512H1

OEM part number	VCELC07512H1	A	S96 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC075-12H1 (Hyphenated form used in catalog tables)	A	S96 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug 400-750 kcmil	A	S96 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S96 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units	A	S96 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00219	**QMBHW**	QMB circuit breaker adapter unit for H-frame breaker	—	unknown
EDH-SQD-00220	**QMBJW**	QMB circuit breaker adapter unit for J-frame breaker	—	unknown

EDH-SQD-00219	QMBHW	Square D	breaker-mounting-kit	UNKNOWN

QMB circuit breaker adapter unit for H-frame breaker

OEM part number	QMBHW	A	S83 oem_spec
Description	Adapter unit with plug-on jaws allowing H-frame breaker to plug onto QMB panelboard/switchboard bus	A	same as above
Fasteners	Spring nuts (2 per side) in mounting rail slots; 1/4-20 unit mounting screws through unit mounting flange	A	S83 Fig. 1; oem_spec
Torque values	Unit mounting screws 30 lb-in (3 N-m)	A	S83 oem_spec
OEM instruction document	80043-339-04 (05/2005)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: QMB · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Uses terminal kit S37444/S37445 per bulletin text*		

EDH-SQD-00220	QMBJW	Square D	breaker-mounting-kit	UNKNOWN

QMB circuit breaker adapter unit for J-frame breaker

OEM part number	QMBJW	A	S83 oem_spec
Description	Adapter unit with plug-on jaws allowing J-frame breaker to plug onto QMB panelboard/switchboard bus	A	same as above
Fasteners	Spring nuts (2 per side) in mounting rail slots; 1/4-20 unit mounting screws through unit mounting flange	A	S83 Fig. 1; oem_spec
Torque values	Unit mounting screws 30 lb-in (3 N-m)	A	S83 oem_spec
OEM instruction document	80043-339-04 (05/2005)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: QMB · Breakers: PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Uses terminal kit S37444/S37445 per bulletin text*		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00885	**QMB12SN**	QMB solid neutral assembly 1200 A	—	unknown
EDH-SQD-00881	**QMB2SN**	QMB solid neutral assembly 225 A	—	unknown
EDH-SQD-00882	**QMB4SN**	QMB solid neutral assembly 400 A	—	unknown
EDH-SQD-00883	**QMB6SN**	QMB solid neutral assembly 600 A	—	unknown
EDH-SQD-00884	**QMB8SN**	QMB solid neutral assembly 800 A	—	unknown

EDH-SQD-00885	QMB12SN	Square D	neutral-assembly	STATUS UNKNOWN

QMB solid neutral assembly 1200 A

OEM part number	QMB12SN	A	S609 2009 Digest 13-2 Table 13.3; oem_spec
Description	Solid neutral assembly for QMB RTI panelboards, 1200 A	A	S609 oem_spec
Current rating	1200 A	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00881	QMB2SN	Square D	neutral-assembly	STATUS UNKNOWN

QMB solid neutral assembly 225 A

OEM part number	QMB2SN	A	S609 2009 Digest 13-2 Table 13.3; oem_spec
Alternate / superseded numbers	QM-2SN (Possible predecessor numbering QM-xSN (already in catalogue from Digest 152); equivalence not stated by OEM)	C	S609 equivalent; oem_spec
Description	Solid neutral assembly for QMB RTI panelboards, 225 A	A	same as above
Current rating	225 A	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00882	QMB4SN	Square D	neutral-assembly	STATUS UNKNOWN

QMB solid neutral assembly 400 A

OEM part number	QMB4SN	A	S609 2009 Digest 13-2 Table 13.3; oem_spec
Alternate / superseded numbers	QM-4SN (Possible predecessor numbering QM-xSN (already in catalogue from Digest 152); equivalence not stated by OEM)	C	S609 equivalent; oem_spec
Description	Solid neutral assembly for QMB RTI panelboards, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00883	QMB6SN	Square D	neutral-assembly	STATUS UNKNOWN

QMB solid neutral assembly 600 A

OEM part number	QMB6SN	A	S609 2009 Digest 13-2 Table 13.3; oem_spec
Alternate / superseded numbers	QM-6SN (Possible predecessor numbering QM-xSN (already in catalogue from Digest 152); equivalence not stated by OEM)	C	S609 equivalent; oem_spec
Description	Solid neutral assembly for QMB RTI panelboards, 600 A	A	same as above
Current rating	600 A	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00884	QMB8SN	Square D	neutral-assembly	STATUS UNKNOWN

QMB solid neutral assembly 800 A

OEM part number	QMB8SN	A	S609 2009 Digest 13-2 Table 13.3; oem_spec
Description	Solid neutral assembly for QMB RTI panelboards, 800 A	A	S609 oem_spec
Current rating	800 A	A	same as above
Cross-links	Families: QMB		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00350	**4052098601**	QMB367W Series E1 renewal part: Load base side insulator	QMB367W, Series E1 (E01) A	unknown

EDH-SQD-00350	4052098601	Square D	insulator	STATUS UNKNOWN

QMB367W Series E1 renewal part: Load base side insulator

OEM part number	4052098601	A	S131 oem_spec
Description	Load base side insulator	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 1 per load base	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00312	**QMB15BLW**	QMB blank filler plate QMB15BLW (15 in.)	—	current
EDH-SQD-00309	**QMB1BLW**	QMB blank filler plate QMB1BLW (1.5 in.)	—	current (Crescent lists QMB1BLW as discontinued - unverified
EDH-SQD-00310	**QMB3BLW**	QMB blank filler plate QMB3BLW (3 in.)	—	current
EDH-SQD-00311	**QMB6BLW**	QMB blank filler plate QMB6BLW (6 in.)	—	current

EDH-SQD-00312	QMB15BLW	Square D	filler-plate	CURRENT

QMB blank filler plate QMB15BLW (15 in.)

OEM part number	QMB15BLW	A	S139, S99, S100 oem_spec
Alternate / superseded numbers	GTIN 785901798019	A	S98 alias; oem_spec
Description	Panelboard blank filler plate, 15 in.; Speed-D switchboards with current-series QMB provisions ship with (2)	A	S98, S99 oem_spec
Application	filler for unused QMB mounting space	A	S139 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S120 distributor
Dimensions	Package 2.30 x 16.00 x 26.00 in., 9.04 lb (packaged) (Packaging dimensions, not part dimensions)	A	S98 oem_spec
Status	current	B	S139 oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

EDH-SQD-00309	QMB1BLW	Square D	filler-plate	CURRENT (CRESCENT LIST

QMB blank filler plate QMB1BLW (1.5 in.)

OEM part number	QMB1BLW	A	S139, S99, S100 oem_spec
Description	Blank filler (closing plate) 1.5 in. for current-style QMB panelboards and switchboards with QMB distribution	A	same as above
Application	filler for unused QMB mounting space	A	S139 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S120 distributor
Dimensions	Covers 1.5 in. of QMB mounting space	A	S139 oem_spec
Status	current (Crescent lists QMB1BLW as discontinued - unverified)	C	S120 distributor
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

EDH-SQD-00310	QMB3BLW	Square D	filler-plate	CURRENT

QMB blank filler plate QMB3BLW (3 in.)

OEM part number	QMB3BLW	A	S139, S99, S100 oem_spec
Description	Blank filler (closing plate) 3 in. for current-style QMB panelboards and switchboards with QMB distribution	A	same as above
Application	filler for unused QMB mounting space	A	S139 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S120 distributor
Dimensions	Covers 3 in. of QMB mounting space	A	S139 oem_spec
Status	current	B	same as above
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

EDH-SQD-00311	QMB6BLW	Square D	filler-plate	CURRENT

QMB blank filler plate QMB6BLW (6 in.)

OEM part number	QMB6BLW	A	S139, S99, S100 oem_spec
Description	Blank filler (closing plate) 6 in. for current-style QMB panelboards and switchboards with QMB distribution	A	same as above
Application	filler for unused QMB mounting space	A	S139 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S120 distributor
Dimensions	Covers 6 in. of QMB mounting space	A	S139 oem_spec
Status	current	B	same as above
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00876	**QM38756TS**	QMB RTI 4-piece standard front QM38756TS	—	unknown
EDH-SQD-00880	**QM389012TS**	QMB RTI 4-piece standard front QM389012TS	—	unknown
EDH-SQD-00877	**QM38902TS**	QMB RTI 4-piece standard front QM38902TS	—	unknown
EDH-SQD-00878	**QM38906TS**	QMB RTI 4-piece standard front QM38906TS	—	unknown
EDH-SQD-00879	**QM38908TS**	QMB RTI 4-piece standard front QM38908TS	—	unknown

EDH-SQD-00876	QM38756TS	Square D	trim	STATUS UNKNOWN

QMB RTI 4-piece standard front QM38756TS

OEM part number	QM38756TS	A	S609 2009 Digest 13-2; oem_spec
Description	QMB front (4-piece standard) for QM3875B box, 400/600 A interiors	A	S609 oem_spec
Cross-links	Families: QMB		

EDH-SQD-00880	QM389012TS	Square D	trim	STATUS UNKNOWN

QMB RTI 4-piece standard front QM389012TS

OEM part number	QM389012TS	A	S609 2009 Digest 13-2; oem_spec
Description	QMB front (4-piece standard) for QM3890B box, 1200 A MLO interior	A	S609 oem_spec
Cross-links	Families: QMB		

EDH-SQD-00877	QM38902TS	Square D	trim	STATUS UNKNOWN

QMB RTI 4-piece standard front QM38902TS

OEM part number	QM38902TS	A	S609 2009 Digest 13-2; oem_spec
Description	QMB front (4-piece standard) for QM3890B box, 225 A MLO / 200 A main switch interiors	A	S609 oem_spec
Cross-links	Families: QMB		

EDH-SQD-00878	QM38906TS	Square D	trim	STATUS UNKNOWN

QMB RTI 4-piece standard front QM38906TS

OEM part number	QM38906TS	A	S609 2009 Digest 13-2; oem_spec
Description	QMB front (4-piece standard) for QM3890B box, 600 A MLO / 400-600 A main switch interiors	A	S609 oem_spec
Cross-links	Families: QMB		

EDH-SQD-00879	QM38908TS	Square D	trim	STATUS UNKNOWN

QMB RTI 4-piece standard front QM38908TS

OEM part number	QM38908TS	A	S609 2009 Digest 13-2; oem_spec
Description	QMB front (4-piece standard) for QM3890B box, 800 A MLO interior	A	S609 oem_spec
Cross-links	Families: QMB		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00874	**QM3875B**	QMB RTI box, 38 in W x 75 in H	—	unknown
EDH-SQD-00875	**QM3890B**	QMB RTI box, 38 in W x 90 in H	—	unknown

EDH-SQD-00874	QM3875B	Square D	box/enclosure	STATUS UNKNOWN

QMB RTI box, 38 in W x 75 in H

OEM part number	QM3875B	A	S609 2009 Digest 13-2 Tables 13.1/13.2; oem_spec
Description	QMB Ready-to-Install box (component selection) for interiors QMB45754, QMB45756 (400/600 A MLO)	A	S609 oem_spec
Dimensions	38 in W x 75 in H	A	same as above
Cross-links	Families: QMB		
Not yet documented	depth		

EDH-SQD-00875	QM3890B	Square D	box/enclosure	STATUS UNKNOWN

QMB RTI box, 38 in W x 90 in H

OEM part number	QM3890B	A	S609 2009 Digest 13-2 Tables 13.1/13.2; oem_spec
Description	QMB Ready-to-Install box (component selection) for interiors QMB60902, QMB45908, QMB459012, QMB60906, QMB5190324M, QMB4590325M/6M, QMB5190364M, QMB4590365M/6M	A	S609 oem_spec
Dimensions	38 in W x 90 in H	A	same as above
Cross-links	Families: QMB		
Not yet documented	depth		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00353	**4028343250**	QMB367W Series E1 renewal part: Switch mounting hardware kit:	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00351	**4028343550**	QMB367W Series E1 renewal part: Handle knob kit	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00343	**4028343750**	QMB363TW Series E1 renewal part: Handle knob kit	QMB363TW, Series E1 (E01) A	unknown

EDH-SQD-00353	4028343250	Square D	hardware-kit	STATUS UNKNOWN

QMB367W Series E1 renewal part: Switch mounting hardware kit:

OEM part number	4028343250	A	S131 oem_spec
Description	Switch mounting hardware kit: (6) spring nuts, (6) screws, (1) circuit ID card	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: -	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00351	4028343550	Square D	hardware-kit	STATUS UNKNOWN

QMB367W Series E1 renewal part: Handle knob kit

OEM part number	4028343550	**A**	S131 oem_spec
Description	Handle knob kit	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: -	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00343	4028343750	Square D	hardware-kit	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Handle knob kit

OEM part number	4028343750	**A**	S130 oem_spec
Description	Handle knob kit	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00349	**2142720241**	QMB367W Series E1 renewal part: Load base mounting screw	QMB367W, Series E1 (E01) **A**	unknown
EDH-SQD-00340	**2330241601**	QMB363TW Series E1 renewal part: Push nut for arc suppression assembly	QMB363TW, Series E1 (E01) **A**	unknown
EDH-SQD-00345	**2342702001**	QMB363TW Series E1 renewal part: Lug mounting nut	QMB363TW, Series E1 (E01) **A**	unknown
EDH-SQD-00352	**2342702400**	QMB367W Series E1 renewal part: Lug mounting nut	QMB367W, Series E1 (E01) **A**	unknown
EDH-SQD-00342	**4020506501**	QMB363TW Series E1 renewal part: Load base mounting screw	QMB363TW, Series E1 (E01) **A**	unknown

EDH-SQD-00349	2142720241	Square D	fastener	STATUS UNKNOWN

QMB367W Series E1 renewal part: Load base mounting screw

OEM part number	2142720241	**A**	S131 oem_spec
Description	Load base mounting screw	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 3 per load base	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00340	2330241601	Square D	fastener	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Push nut for arc suppression assembly

OEM part number	2330241601	**A**	S130 oem_spec
Description	Push nut for arc suppression assembly	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 2 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00345	2342702001	Square D	fastener	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Lug mounting nut

OEM part number	2342702001	A	S130 oem_spec
Description	Lug mounting nut (also used as Keps nut in QO load centers per FA294947)	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	A	same as above
Kit contents	Quantity: per lug	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00352	2342702400	Square D	fastener	STATUS UNKNOWN

QMB367W Series E1 renewal part: Lug mounting nut

OEM part number	2342702400	A	S131 oem_spec
Description	Lug mounting nut	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 1 per lug	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00342	4020506501	Square D	fastener	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Load base mounting screw

OEM part number	4020506501	A	S130 oem_spec
Description	Load base mounting screw	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	A	same as above
Kit contents	Quantity: 2 per load base	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00326	**QMB306EX**	QMB plug-on extension assembly QMB306EX (legacy QW retrofit)	—	1970 catalog item; current status unknown
EDH-SQD-00328	**QMB310EX**	QMB plug-on extension assembly QMB310EX (legacy QW retrofit)	—	1970 catalog item; current status unknown
EDH-SQD-00330	**QMB320EX**	QMB plug-on extension assembly QMB320EX (legacy QW retrofit)	—	1970 catalog item; current status unknown
EDH-SQD-00278	**QMB600T6**	QMB Class T fuse adapter kit QMB600T6	QMB366W A	unknown
EDH-SQD-00279	**QMB800T6**	QMB Class T fuse adapter kit QMB800T6	QMB367W A	unknown

EDH-SQD-00326	QMB306EX	Square D	conversion-kit	1970 CATALOG ITEM; CUR

QMB plug-on extension assembly QMB306EX (legacy QW retrofit)

OEM part number	QMB306EX	A	S134, S463 oem_spec
Alternate / superseded numbers	QMB-306-EX (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Plug-on extension assembly for QW (38 in.) interiors used with QMB362T replacing QMB3606T	A	S134 oem_spec
	Extension assembly, three pole, unit height 6 in, 600 V (1970: $10.50/$26.00)	A	S463 Digest 152 (1970) p.83; oem_spec
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S134 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Status	1970 catalog item; current status unknown	D	S463 inference
Era of manufacture	Listed in 1970 Digest 152	A	S463 Digest 152 (1970) p.83; oem_spec
Cross-links	Families: QMB, QMB-LEGACY		
Not yet documented	current_status, Dimensions, Kit contents, Material		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00328	QMB310EX	Square D	conversion-kit	1970 CATALOG ITEM; CUR

QMB plug-on extension assembly QMB310EX (legacy QW retrofit)

OEM part number	QMB310EX	A	S136, S463 oem_spec
Alternate / superseded numbers	QMB-310-EX (1970 Digest spelling)	A	S463 alias; oem_spec
Description	Plug-on extension assembly for QW (38 in., flatwise bus) interiors; used with QMB3400LA and QMB3300LA breaker units	A	S136, S135, S137, S141 oem_spec
	Extension assembly, three pole, unit height 7-1/2 in, 600 V (1970: $10.50/$26.00)	A	S463 Digest 152 (1970) p.83; oem_spec
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S136, S135, S137, S141 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Status	1970 catalog item; current status unknown	D	S463 inference
Era of manufacture	Listed in 1970 Digest 152	A	S463 Digest 152 (1970) p.83; oem_spec
Cross-links	Families: QMB, QMB-LEGACY		
Not yet documented	current_status, Dimensions, Kit contents, Material		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00330	QMB320EX	Square D	conversion-kit	1970 CATALOG ITEM; CUR

QMB plug-on extension assembly QMB320EX (legacy QW retrofit)

OEM part number	QMB320EX	A	S133, S463 oem_spec
Alternate / superseded numbers	QMB-320-EX [alias]	A	same as above
Description	Plug-on extension kit for QW panelboards/switchboards used with QMB364 replacing QMB3620 (printed 'QMB-320-EX')	A	S133 oem_spec
	Extension assembly, three pole, unit height 9 in, 600 V (1970: $10.50/$26.00)	A	S463 Digest 152 (1970) p.83; oem_spec
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S133 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Status	1970 catalog item; current status unknown	D	S463 inference
Era of manufacture	Listed in 1970 Digest 152	A	S463 Digest 152 (1970) p.83; oem_spec
Cross-links	Families: QMB, QMB-LEGACY		
Not yet documented	current_status, Dimensions, Kit contents, Material		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00278	QMB600T6	Square D	conversion-kit	STATUS UNKNOWN

QMB Class T fuse adapter kit QMB600T6

OEM part number	QMB600T6	A	S96, S609 Table 4 notes e, j; oem_spec
Description	Kit to adapt QMB366W 600 A switch to 600 Vac Class T fuses (use T6 fuses with standard hp ratings only)	A	S96 Table 4 notes e, j; oem_spec
	Main switch replacement unit (replaces Series E1) fuse-spacing component: Class T fuse spacing adapter, 600 A (with QMB366MW); both catalog numbers required for a complete device (e.g. QMB365MW + QMB400T6)	A	S609 oem_spec
Application	accessory	A	S96 oem_spec
Breaker compatibility	QMB366W	A	S96 Table 4; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Kit contents		

EDH-SQD-00279	QMB800T6	Square D	conversion-kit	STATUS UNKNOWN

QMB Class T fuse adapter kit QMB800T6

OEM part number	QMB800T6	A	S96, S609 Table 4 notes e, j; oem_spec
Description	Kit to adapt QMB367W 800 A switch to 600 Vac Class T fuses (standard hp ratings only)	A	S96 Table 4 notes e, j; oem_spec
	Main switch replacement unit (replaces Series E1) fuse-spacing component: Class T fuse spacing adapter, 800 A (with QMB367MW); both catalog numbers required for a complete device (e.g. QMB365MW + QMB400T6)	A	S609 oem_spec
Application	accessory	A	S96 oem_spec
Breaker compatibility	QMB367W	A	S96 Table 4; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Kit contents		

Spd Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00313	**QMB1IMA_**	QMB Surgelogic IMA TVSS unit QMB1IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00314	**QMB2IMA_**	QMB Surgelogic IMA TVSS unit QMB2IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00315	**QMB3IMA_**	QMB Surgelogic IMA TVSS unit QMB3IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00316	**QMB4IMA_**	QMB Surgelogic IMA TVSS unit QMB4IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00317	**QMB8IMA_**	QMB Surgelogic IMA TVSS unit QMB8IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00318	**TVS12RMU**	Surgelogic TVSS remote monitor TVS12RMU	—	unknown

EDH-SQD-00313 QMB1IMA_ Square D spd-kit LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB1IMA

OEM part number	QMB1IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S96 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 120/240 Vac 1-phase; MCOV 150	A	S96 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S96 oem_spec
Voltage rating	120/240 Vac 1-phase; MCOV 150	A	S96 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S96 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00314 QMB2IMA_ Square D spd-kit LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB2IMA

OEM part number	QMB2IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S96 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 208Y/120 Vac 3-phase 4-wire; MCOV 150	A	S96 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S96 oem_spec
Voltage rating	208Y/120 Vac 3-phase 4-wire; MCOV 150	A	S96 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S96 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00315 QMB3IMA_ Square D spd-kit LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB3IMA

OEM part number	QMB3IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S96 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 240/120 Vac 3-phase high-leg delta; MCOV 275/150	A	S96 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S96 oem_spec
Voltage rating	240/120 Vac 3-phase high-leg delta; MCOV 275/150	A	S96 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S96 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00316	QMB4IMA_	Square D	spd-kit	LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB4IMA

OEM part number	QMB4IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S96 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 480Y/277 Vac 3-phase 4-wire; MCOV 320	A	S96 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S96 oem_spec
Voltage rating	480Y/277 Vac 3-phase 4-wire; MCOV 320	A	S96 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S96 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00317	QMB8IMA_	Square D	spd-kit	LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB8IMA

OEM part number	QMB8IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S96 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 600Y/347 Vac 3-phase 4-wire; MCOV 420	A	S96 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S96 oem_spec
Voltage rating	600Y/347 Vac 3-phase 4-wire; MCOV 420	A	S96 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S96 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00318	TVS12RMU	Square D	spd-kit	STATUS UNKNOWN

Surgelogic TVSS remote monitor TVS12RMU

OEM part number	TVS12RMU	A	S96 Table 15, p. 20; oem_spec
Description	Remote monitor providing TVSS status up to 1000 ft from unit	A	S96 Table 15; oem_spec
Application	accessory	A	S96 oem_spec
Cross-links	Families: QMB		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00222	**QMB221HW**	QMB fusible switch unit QMB221HW (2P 240 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00221	**QMB221TW**	QMB fusible switch unit QMB221TW (2P 240 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00224	**QMB222HW**	QMB fusible switch unit QMB222HW (2P 240 Vac, 60-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00223	**QMB222TW**	QMB fusible switch unit QMB222TW (2P 240 Vac, 60-60 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00226	**QMB223HW**	QMB fusible switch unit QMB223HW (2P 240 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00225	**QMB223TW**	QMB fusible switch unit QMB223TW (2P 240 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00227	**QMB224W**	QMB fusible switch unit QMB224W (2P 240 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00228	**QMB225W**	QMB fusible switch unit QMB225W (2P 240 Vac, 400 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00229	**QMB225WT3**	QMB fusible switch unit QMB225WT3 (2P 240 Vac, 400 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00243	**QMB261HW**	QMB fusible switch unit QMB261HW (2P 600 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00242	**QMB261TW**	QMB fusible switch unit QMB261TW (2P 600 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00245	**QMB262HW**	QMB fusible switch unit QMB262HW (2P 600 Vac, 60-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00244	**QMB262TW**	QMB fusible switch unit QMB262TW (2P 600 Vac, 60-60 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00247	**QMB263HW**	QMB fusible switch unit QMB263HW (2P 600 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00246	**QMB263TW**	QMB fusible switch unit QMB263TW (2P 600 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00248	**QMB264W**	QMB fusible switch unit QMB264W (2P 600 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00231	**QMB321HW**	QMB fusible switch unit QMB321HW (3P 240 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00230	**QMB321TW**	QMB fusible switch unit QMB321TW (3P 240 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00233	**QMB322HW**	QMB fusible switch unit QMB322HW (3P 240 Vac, 60-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00232	**QMB322TW**	QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00235	**QMB323HW**	QMB fusible switch unit QMB323HW (3P 240 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00889	**QMB323MW**	QMB main switch replacement unit 100 A 3P 240 Vac (replaces Series E1)	—	unknown
EDH-SQD-00234	**QMB323TW**	QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00890	**QMB324MW**	QMB main switch replacement unit 200 A 3P 240 Vac (replaces Series E1)	—	unknown
EDH-SQD-00236	**QMB324W**	QMB fusible switch unit QMB324W (3P 240 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00891	**QMB325MW**	QMB main switch replacement unit 400 A 3P 240 Vac (replaces Series E1)	—	unknown
EDH-SQD-00237	**QMB325W**	QMB fusible switch unit QMB325W (3P 240 Vac, 400 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00238	**QMB325WT3**	QMB fusible switch unit QMB325WT3 (3P 240 Vac, 400 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00892	**QMB326MW**	QMB main switch replacement unit 600 A 3P 240 Vac (replaces Series E1)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00239	**QMB326W**	QMB fusible switch unit QMB326W (3P 240 Vac, 600 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00240	**QMB326WT3**	QMB fusible switch unit QMB326WT3 (3P 240 Vac, 600 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00241	**QMB327WT3**	QMB fusible switch unit QMB327WT3 (3P 240 Vac, 800 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00250	**QMB361HW**	QMB fusible switch unit QMB361HW (3P 600 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00249	**QMB361TW**	QMB fusible switch unit QMB361TW (3P 600 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00252	**QMB362HW**	QMB fusible switch unit QMB362HW (3P 600 Vac, 60-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00253	**QMB362T21W**	QMB fusible switch unit QMB362T21W (3P 600 Vac, 60-30 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00251	**QMB362TW**	QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00255	**QMB363HW**	QMB fusible switch unit QMB363HW (3P 600 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00893	**QMB363MW**	QMB main switch replacement unit 100 A 3P 600 Vac (replaces Series E1)	—	unknown
EDH-SQD-00256	**QMB363T31W**	QMB fusible switch unit QMB363T31W (3P 600 Vac, 100-30 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00257	**QMB363T32W**	QMB fusible switch unit QMB363T32W (3P 600 Vac, 100-60 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00254	**QMB363TW**	QMB fusible switch unit QMB363TW (3P 600 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00894	**QMB364MW**	QMB main switch replacement unit 200 A 3P 600 Vac (replaces Series E1)	—	unknown
EDH-SQD-00258	**QMB364W**	QMB fusible switch unit QMB364W (3P 600 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00895	**QMB365MW**	QMB main switch replacement unit 400 A 3P 600 Vac (replaces Series E1)	—	unknown
EDH-SQD-00259	**QMB365W**	QMB fusible switch unit QMB365W (3P 600 Vac, 400 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00260	**QMB365WT6**	QMB fusible switch unit QMB365WT6 (3P 600 Vac, 400 A)	Use 600 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00896	**QMB366MW**	QMB main switch replacement unit 600 A 3P 600 Vac (replaces Series E1)	—	unknown
EDH-SQD-00261	**QMB366W**	QMB fusible switch unit QMB366W (3P 600 Vac, 600 A)	Adapt to 600 Vac Class T fuses with kit QMB600T6 (standard hp ratings **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00897	**QMB367MW**	QMB main switch replacement unit 800 A 3P 600 Vac (replaces Series E1)	—	unknown
EDH-SQD-00262	**QMB367W**	QMB fusible switch unit QMB367W (3P 600 Vac, 800 A)	Adapt to 600 Vac Class T fuses with kit QMB800T6; Class J provisions n **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00264	**QMJ361T**	QMJ fusible switch unit QMJ361T (30-30 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB300 **A**	current per 2015 catalog

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00265	**QMJ362T**	QMJ fusible switch unit QMJ362T (60-60 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00267	**QMJ363H**	QMJ fusible switch unit QMJ363H (100-blank A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00266	**QMJ363T**	QMJ fusible switch unit QMJ363T (100-100 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00269	**QMJ364H**	QMJ fusible switch unit QMJ364H (200-blank A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00268	**QMJ364T**	QMJ fusible switch unit QMJ364T (200-200 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00270	**QMJ365**	QMJ fusible switch unit QMJ365 (400 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB200 **A**	current per 2015 catalog
EDH-SQD-00271	**QMJ366**	QMJ fusible switch unit QMJ366 (600 A)	600 V Class J fuses only; 200 kA SCCR **A**	current per 2015 catalog

EDH-SQD-00222	**QMB221HW**	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB221HW (2P 240 Vac, 30-blank A)

OEM part number	QMB221HW	**A**	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 30-blank (single switch in twin frame) A; Blank units cannot be modified to accept a switch interior	**A**	S96 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	**A**	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	**A**	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	**A**	S96 Table 4, pp. 10-11; oem_spec
Poles	2	**A**	same as above
Voltage rating	240 Vac / 250 Vdc	**A**	same as above
Current rating	30-blank (single switch in twin frame) A	**A**	same as above
Kit contents	Optional Class R fuse kit: HRK30 (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	**A**	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	**A**	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	**B**	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	**A**	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00221	QMB221TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB221TW (2P 240 Vac, 30-30 A)

OEM part number	QMB221TW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (2 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00224	QMB222HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB222HW (2P 240 Vac, 60-blank A)

OEM part number	QMB222HW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00223	QMB222TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB222TW (2P 240 Vac, 60-60 A)

OEM part number	QMB222TW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 60-60 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00226	QMB223HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB223HW (2P 240 Vac, 100-blank A)

OEM part number	QMB223HW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00225	QMB223TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB223TW (2P 240 Vac, 100-100 A)

OEM part number	QMB223TW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 100-100 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00227	QMB224W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB224W (2P 240 Vac, 200 A)

OEM part number	QMB224W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00228	QMB225W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB225W (2P 240 Vac, 400 A)

OEM part number	QMB225W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 400 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Poles	2	A	S96 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	400 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00229	QMB225WT3	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB225WT3 (2P 240 Vac, 400 A)

OEM part number	QMB225WT3	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac, 400 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S96 Table 4 note c; oem_spec
Poles	2	A	S96 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	400 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable (#1-600); no optional lugs	A	S96 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00243	QMB261HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB261HW (2P 600 Vac, 30-blank A)

OEM part number	QMB261HW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 30-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	30-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00242	QMB261TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB261TW (2P 600 Vac, 30-30 A)

OEM part number	QMB261TW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00245	QMB262HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB262HW (2P 600 Vac, 60-blank A)

OEM part number	QMB262HW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00244	QMB262TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB262TW (2P 600 Vac, 60-60 A)

OEM part number	QMB262TW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 60-60 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00247	QMB263HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB263HW (2P 600 Vac, 100-blank A)

OEM part number	QMB263HW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00246	QMB263TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB263TW (2P 600 Vac, 100-100 A)

OEM part number	QMB263TW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 100-100 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (2 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00248	QMB264W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB264W (2P 600 Vac, 200 A)

OEM part number	QMB264W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00231	QMB321HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB321HW (3P 240 Vac, 30-blank A)

OEM part number	QMB321HW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 30-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	30-blank A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00230	QMB321TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB321TW (3P 240 Vac, 30-30 A)

OEM part number	QMB321TW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (2 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00233	QMB322HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB322HW (3P 240 Vac, 60-blank A)

OEM part number	QMB322HW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00232	QMB322TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)

OEM part number	QMB322TW	A	S96 Table 4, pp. 10-11; oem_spec

Alternate / superseded numbers	QMB322TD (Distributor-listed variant; FA119872/FA122651-family FAQs cite 'TD' units as replacements for legacy switches; relation of TD vs TW suffix unknown)	C	S123 alias; distributor
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 60-60 (twin) A	A	S96 Table 4, pp. 10-11; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		
Open question	*What distinguishes QMB322TD from QMB322TW (suffix D vs W)? Is TD the legacy-interior-compatible version?*		

EDH-SQD-00235	**QMB323HW**	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB323HW (3P 240 Vac, 100-blank A)

OEM part number	QMB323HW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00889	QMB323MW	Square D	switch-unit	STATUS UNKNOWN

QMB main switch replacement unit 100 A 3P 240 Vac (replaces Series E1)

OEM part number	QMB323MW	A	S609 2009 Digest 13-3 Table 13.1; oem_spec
Description	QMB main switch replacement unit, 3-pole, 100 A, 240 Vac, standard Class H/R/K fuse spacing (replaces Series E1)	A	S609 oem_spec
Application	main	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00234	QMB323TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)

OEM part number	QMB323TW	A	S96 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB323TD (QMB323TD is Schneider's stated replacement for legacy QMB310T; relation to QMB323TW unknown)	C	S123, S132 alias; distributor
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 100-100 (twin) A	A	S96 Table 4, pp. 10-11; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		
Open question	*Is QMB323TD a variant of QMB323TW for pre-1984 QM/QW interiors?*		

EDH-SQD-00890	QMB324MW	Square D	switch-unit	STATUS UNKNOWN

QMB main switch replacement unit 200 A 3P 240 Vac (replaces Series E1)

OEM part number	QMB324MW	A	S609 2009 Digest 13-3 Table 13.1; oem_spec
Description	QMB main switch replacement unit, 3-pole, 200 A, 240 Vac, standard Class H/R/K fuse spacing (replaces Series E1)	A	S609 oem_spec
Application	main	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00236	QMB324W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB324W (3P 240 Vac, 200 A)

OEM part number	QMB324W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00891	QMB325MW	Square D	switch-unit	STATUS UNKNOWN

QMB main switch replacement unit 400 A 3P 240 Vac (replaces Series E1)

OEM part number	QMB325MW	A	S609 2009 Digest 13-3 Table 13.1; oem_spec
Description	QMB main switch replacement unit, 3-pole, 400 A, 240 Vac, standard Class H/R/K fuse spacing (replaces Series E1)	A	S609 oem_spec
Application	main	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00237	QMB325W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB325W (3P 240 Vac, 400 A)

OEM part number	QMB325W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 400 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Poles	3	A	S96 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	400 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00238	QMB325WT3	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB325WT3 (3P 240 Vac, 400 A)

OEM part number	QMB325WT3	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 400 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S96 Table 4 note c; oem_spec
Poles	3	A	S96 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	400 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable (#1-600)	A	S96 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00892	QMB326MW	Square D	switch-unit	STATUS UNKNOWN

QMB main switch replacement unit 600 A 3P 240 Vac (replaces Series E1)

OEM part number	QMB326MW	A	S609 2009 Digest 13-3 Table 13.1; oem_spec
Description	QMB main switch replacement unit, 3-pole, 600 A, 240 Vac, standard Class H/R/K fuse spacing (replaces Series E1)	A	S609 oem_spec
Application	main	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00239	QMB326W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB326W (3P 240 Vac, 600 A)

OEM part number	QMB326W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 600 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Poles	3	A	S96 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	600 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00240	QMB326WT3	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB326WT3 (3P 240 Vac, 600 A)

OEM part number	QMB326WT3	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 600 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S96 Table 4 note c; oem_spec
Poles	3	A	S96 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	600 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable ((2) 3/0-600)	A	S96 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00241	QMB327WT3	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB327WT3 (3P 240 Vac, 800 A)

OEM part number	QMB327WT3	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 800 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S96 Table 4 note c; oem_spec
Poles	3	A	S96 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	800 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	(3) 40251-287-50 Al mech 3/0-600 (std); Al crimp (3) VCEL05012H1 or (3) VCEL07512H1; Cu crimp VCELC05012H1 / VCELC07512H1	A	S96 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00250	QMB361HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB361HW (3P 600 Vac, 30-blank A)

OEM part number	QMB361HW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 30-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	30-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R; 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00249	QMB361TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB361TW (3P 600 Vac, 30-30 A)

OEM part number	QMB361TW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R; 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00252	QMB362HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB362HW (3P 600 Vac, 60-blank A)

OEM part number	QMB362HW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R; 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00253	QMB362T21W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB362T21W (3P 600 Vac, 60-30 A)

OEM part number	QMB362T21W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 60-30 (twin, unequal) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	60-30 (twin, unequal) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R and QMB36R (1 each); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00251	QMB362TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)

OEM part number	QMB362TW	A	S96 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB362T (FAQ FA88047 names 'QMB362T' (no W) as replacement for QMB3606T; relation to QMB362TW unverified)	C	S134 alias; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 60-60 (twin) A	A	S96 Table 4, pp. 10-11; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00255	QMB363HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363HW (3P 600 Vac, 100-blank A)

OEM part number	QMB363HW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00893	QMB363MW	Square D	switch-unit	STATUS UNKNOWN

QMB main switch replacement unit 100 A 3P 600 Vac (replaces Series E1)

OEM part number	QMB363MW	A	S609 2009 Digest 13-3 Table 13.1; oem_spec
Description	QMB main switch replacement unit, 3-pole, 100 A, 600 Vac, standard Class H/R/K fuse spacing (replaces Series E1)	A	S609 oem_spec
Application	main	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00256	QMB363T31W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363T31W (3P 600 Vac, 100-30 A)

OEM part number	QMB363T31W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-30 (twin, unequal) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-30 (twin, unequal) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 and QMB36R (1 each); 100 A side: 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0; 30 A side: 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00257	QMB363T32W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363T32W (3P 600 Vac, 100-60 A)

OEM part number	QMB363T32W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-60 (twin, unequal) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-60 (twin, unequal) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 and QMB60R (1 each); 100 A side: 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0; 60 A side: 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00254	QMB363TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363TW (3P 600 Vac, 100-100 A)

OEM part number	QMB363TW	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-100 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (2 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Replacement / successor	Field-replaceable Series E1 parts listed in FAQ FA92305; see separate part records	A	S130 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00894	QMB364MW	Square D	switch-unit	STATUS UNKNOWN

QMB main switch replacement unit 200 A 3P 600 Vac (replaces Series E1)

OEM part number	QMB364MW	A	S609 2009 Digest 13-3 Table 13.1; oem_spec
Description	QMB main switch replacement unit, 3-pole, 200 A, 600 Vac, standard Class H/R/K fuse spacing (replaces Series E1)	A	S609 oem_spec
Application	main	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00258	QMB364W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB364W (3P 600 Vac, 200 A)

OEM part number	QMB364W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S96 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00895	QMB365MW	Square D	switch-unit	STATUS UNKNOWN

QMB main switch replacement unit 400 A 3P 600 Vac (replaces Series E1)

OEM part number	QMB365MW	A	S609 2009 Digest 13-3 Table 13.1; oem_spec
Description	QMB main switch replacement unit, 3-pole, 400 A, 600 Vac, standard Class H/R/K fuse spacing (replaces Series E1)	A	S609 oem_spec
Application	main	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00259	QMB365W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB365W (3P 600 Vac, 400 A)

OEM part number	QMB365W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac / 250 Vdc, 400 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Poles	3	A	S96 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	400 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00260	QMB365WT6	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB365WT6 (3P 600 Vac, 400 A)

OEM part number	QMB365WT6	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 400 (single, 600 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Use 600 Vac Class T fuses only	A	S96 Table 4 note h; oem_spec
Poles	3	A	S96 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac	A	same as above
Current rating	400 (single, 600 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable ((2) 3/0-600)	A	S96 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00896	QMB366MW	Square D	switch-unit	STATUS UNKNOWN

QMB main switch replacement unit 600 A 3P 600 Vac (replaces Series E1)

OEM part number	QMB366MW	A	S609 2009 Digest 13-3 Table 13.1; oem_spec
Description	QMB main switch replacement unit, 3-pole, 600 A, 600 Vac, standard Class H/R/K fuse spacing (replaces Series E1)	A	S609 oem_spec
Application	main	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00261	QMB366W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB366W (3P 600 Vac, 600 A)

OEM part number	QMB366W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac / 250 Vdc, 600 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Adapt to 600 Vac Class T fuses with kit QMB600T6 (standard hp ratings only)	A	S96 Table 4 note e; oem_spec
Poles	3	A	S96 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	600 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1; Cu crimp (2) VCELC05012H1	A	S96 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00897	QMB367MW	Square D	switch-unit	STATUS UNKNOWN

QMB main switch replacement unit 800 A 3P 600 Vac (replaces Series E1)

OEM part number	QMB367MW	A	S609 2009 Digest 13-3 Table 13.1; oem_spec
Description	QMB main switch replacement unit, 3-pole, 800 A, 600 Vac, standard Class H/R/K fuse spacing (replaces Series E1)	A	S609 oem_spec
Application	main	A	same as above
Cross-links	Families: QMB		

EDH-SQD-00262	QMB367W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB367W (3P 600 Vac, 800 A)

OEM part number	QMB367W	A	S96 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 800 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S96, S94 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S96 pp. 6-7; oem_spec
Breaker compatibility	Adapt to 600 Vac Class T fuses with kit QMB800T6; Class J provisions not available on 800 A	A	S96 Table 4 notes d, j; oem_spec
Poles	3	A	S96 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac	A	same as above
Current rating	800 (single) A	A	same as above
Kit contents	(3) 40251-287-50 Al mech 3/0-600 (std); Al crimp (3) VCEL05012H1 or (3) VCEL07512H1; Cu crimp VCELC05012H1 / VCELC07512H1	A	S96 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S96 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S96 oem_spec
Replacement / successor	Field-replaceable Series E1 parts listed in FAQ FA92286; see separate part records	A	S131 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S96 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00264	QMJ361T	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ361T (30-30 A)

OEM part number	QMJ361T	A	S96 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 30-30 (twin) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S96 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB300EK-1 or -2	A	S96 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S96 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S96 p. 14; oem_spec
Current rating	30-30 (twin) A	A	S96 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-034-50; wire #14-#2 Al/Cu; use 90 C insulated conductors sized at 75 C ampacity	A	S96 Table 7; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S96 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S96 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00265	QMJ362T	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ362T (60-60 A)

OEM part number	QMJ362T	A	S96 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 60-60 (twin) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S96 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S96 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S96 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S96 p. 14; oem_spec
Current rating	60-60 (twin) A	A	S96 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-034-50; wire #14-#2 Al/Cu; use 90 C insulated conductors sized at 75 C ampacity	A	S96 Table 7; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S96 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S96 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00267	QMJ363H	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ363H (100-blank A)

OEM part number	QMJ363H	A	S96 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 6/7, p. 16; Table 6 note c; oem_spec
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S96 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S96 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S96 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S96 p. 14; oem_spec
Current rating	100-blank A	A	S96 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-014-50; optional VCELC or VCEL-021-14S1; #14-1/0; use 90 C insulated conductors sized at 75 C ampacity	A	S96 Table 7; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S96 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S96 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00266	QMJ363T	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ363T (100-100 A)

OEM part number	QMJ363T	A	S96 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 100-100 (twin) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S96 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S96 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S96 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S96 p. 14; oem_spec
Current rating	100-100 (twin) A	A	S96 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-014-50; optional VERSA-CRIMP VCELC or VCEL-021-14S1; #14-1/0; use 90 C insulated conductors sized at 75 C ampacity	A	S96 Table 7; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S96 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S96 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00269	QMJ364H	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ364H (200-blank A)

OEM part number	QMJ364H	A	S96 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 200-blank A; Blank units cannot be modified to accept a switch interior	A	S96 Table 6/7, p. 16; Table 6 note c; oem_spec
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S96 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S96 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S96 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S96 p. 14; oem_spec
Current rating	200-blank A	A	S96 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40560-270-50; optional VCEL-030-516H1 or VCELC-030-38H1; #6-300; use 90 C insulated conductors sized at 75 C ampacity	A	S96 Table 7; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S96 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S96 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00268	QMJ364T	Square D	switch-unit	CURRENT PER 2015 CATAL
QMJ fusible switch unit QMJ364T (200-200 A)				
OEM part number	QMJ364T		A	S96 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 200-200 (twin) A		A	same as above
Application	Tandem 200 A fusible arrangement uses QMJ364T (600 V, J clips); NEMA 1, 400-1200 A interiors (Tandem statement from Schneider FAQ FA280263 via search summary)		B	S96, S119 oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2		A	S96 p. 14; Table 6/7, p. 16; oem_spec
Poles	3		A	S96 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)		A	S96 p. 14; oem_spec
Current rating	200-200 (twin) A		A	S96 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40560-270-50; optional VCEL-030-516H1 or VCELC-030-38H1; #6-300; use 90 C insulated conductors sized at 75 C ampacity		A	S96 Table 7; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)		A	S96 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog		B	S96 oem_spec
Cross-links	Families: QMB, QED-2			
Not yet documented	Material, renewal parts			

EDH-SQD-00270	QMJ365	Square D	switch-unit	CURRENT PER 2015 CATAL
QMJ fusible switch unit QMJ365 (400 A)				
OEM part number	QMJ365		A	S96 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 400 (single) A		A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only		A	S96 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB200EK-1 or -2		A	S96 p. 14; Table 6/7, p. 16; oem_spec
Poles	3		A	S96 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)		A	S96 p. 14; oem_spec
Current rating	400 (single) A		A	S96 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-039-50; optional VCELC or VCEL-075-12H1; 1/0-750; use 90 C insulated conductors sized at 75 C ampacity		A	S96 Table 7; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)		A	S96 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog		B	S96 oem_spec
Cross-links	Families: QMB, QED-2			
Not yet documented	Material, renewal parts			

EDH-SQD-00271	QMJ366	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ366 (600 A)

OEM part number	QMJ366	A	S96 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 600 (single) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S96 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR	A	S96 p. 14; oem_spec
Poles	3	A	S96 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S96 p. 14; oem_spec
Current rating	600 (single) A	A	S96 Table 6/7, p. 16; oem_spec
Kit contents	(2) per phase 3/0-600; optional VCELC or VCEL-050-12HS1; use 90 C insulated conductors sized at 75 C ampacity	A	S96 Table 7; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S96 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S96 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

Fuse Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00887	**QMB400J**	QMB main switch Class J fuse spacing adapter, 400 A (with QMB365MW)	—	unknown
EDH-SQD-00886	**QMB400T6**	QMB main switch Class T fuse spacing adapter, 400 A (with QMB365MW)	—	unknown
EDH-SQD-00888	**QMB600J**	QMB main switch Class J fuse spacing adapter, 600 A (with QMB366MW)	—	unknown

EDH-SQD-00887	QMB400J	Square D	fuse-kit	STATUS UNKNOWN

QMB main switch Class J fuse spacing adapter, 400 A (with QMB365MW)

OEM part number	QMB400J	A	S609 2009 Digest 13-3 Table 13.1; oem_spec
Description	Main switch replacement unit (replaces Series E1) fuse-spacing component: Class J fuse spacing adapter, 400 A (with QMB365MW); both catalog numbers required for a complete device (e.g. QMB365MW + QMB400T6)	A	S609 oem_spec
Cross-links	Families: QMB		

EDH-SQD-00886	QMB400T6	Square D	fuse-kit	STATUS UNKNOWN

QMB main switch Class T fuse spacing adapter, 400 A (with QMB365MW)

OEM part number	QMB400T6	A	S609 2009 Digest 13-3 Table 13.1; oem_spec
Description	Main switch replacement unit (replaces Series E1) fuse-spacing component: Class T fuse spacing adapter, 400 A (with QMB365MW); both catalog numbers required for a complete device (e.g. QMB365MW + QMB400T6)	A	S609 oem_spec
Cross-links	Families: QMB		

EDH-SQD-00888	QMB600J	Square D	fuse-kit	STATUS UNKNOWN

QMB main switch Class J fuse spacing adapter, 600 A (with QMB366MW)

OEM part number	QMB600J	A	S609 2009 Digest 13-3 Table 13.1; oem_spec
Description	Main switch replacement unit (replaces Series E1) fuse-spacing component: Class J fuse spacing adapter, 600 A (with QMB366MW); both catalog numbers required for a complete device (e.g. QMB365MW + QMB400T6)	A	S609 oem_spec
Cross-links	Families: QMB		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00276	**HRK1020**	QMB Class R fuse kit HRK1020	Listed for: QMB224W, QMB324W, QMB263TW, QMB263HW, QMB264W, QMB363TW, Q **A**	unknown
EDH-SQD-00272	**HRK30**	QMB Class R fuse kit HRK30	Listed for: QMB221TW, QMB221HW, QMB321TW, QMB321HW **A**	unknown
EDH-SQD-00275	**QMB100R**	QMB Class R fuse kit QMB100R	Listed for: QMB223TW, QMB223HW, QMB323TW, QMB323HW **A**	unknown
EDH-SQD-00282	**QMB200EK**	QMB electrical interlock kit QMB200EK	200 A QMB units and QMJ365; listed for QMB224W, QMB324W, QMB264W, QMB3 **A**	unknown
EDH-SQD-00280	**QMB300EK**	QMB electrical interlock kit QMB300EK	30 A and 60 A (4.5 in.) QMB units; QMJ361T; listed for QMB221TW, QMB22 **A**	unknown
EDH-SQD-00273	**QMB36R**	QMB Class R fuse kit QMB36R	Listed for: QMB222TW, QMB222HW, QMB322TW, QMB322HW, QMB261TW, QMB261HW **A**	unknown
EDH-SQD-00277	**QMB4060R**	QMB Class R fuse kit QMB4060R	Listed for: QMB225W, QMB325W, QMB326W, QMB365W, QMB366W **A**	unknown
EDH-SQD-00274	**QMB60R**	QMB Class R fuse kit QMB60R	Listed for: QMB262TW, QMB262HW, QMB362TW, QMB362HW, QMB362T21W, QMB363 **A**	unknown
EDH-SQD-00281	**QMB610EK**	QMB electrical interlock kit QMB610EK	60-100 A (6/7.5 in.) QMB units and QMJ362T-QMJ364H; listed for QMB223T **A**	unknown

EDH-SQD-00276 — HRK1020 — Square D — breaker-accessory — STATUS UNKNOWN

QMB Class R fuse kit HRK1020

OEM part number	HRK1020	**A**	S96 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 100 A 600 V and 200 A QMB switch units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	**A**	S96 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	**A**	S96 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	**C**	S96 p. 8; inference
Breaker compatibility	Listed for: QMB224W, QMB324W, QMB263TW, QMB263HW, QMB264W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMB364W	**A**	S96 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		
Open question	*HRK30/HRK1020 prefix differs from QMB..R kits - are they shared with Square D heavy-duty safety switches?*		

EDH-SQD-00272	HRK30	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit HRK30

OEM part number	HRK30	A	S96 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit (rejection kit), 30 A QMB switches; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S96 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S96 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S96 p. 8; inference
Breaker compatibility	Listed for: QMB221TW, QMB221HW, QMB321TW, QMB321HW	A	S96 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		
Open question	*HRK30/HRK1020 prefix differs from QMB..R kits - are they shared with Square D heavy-duty safety switches?*		

EDH-SQD-00275	QMB100R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB100R

OEM part number	QMB100R	A	S96 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 100 A 240 V QMB twin units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S96 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S96 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S96 p. 8; inference
Breaker compatibility	Listed for: QMB223TW, QMB223HW, QMB323TW, QMB323HW	A	S96 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00282	QMB200EK	Square D	breaker-accessory	STATUS UNKNOWN

QMB electrical interlock kit QMB200EK

OEM part number	QMB200EK	A	S96 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB200EK-1	A	S96 alias; Table 4 note a; oem_spec
	QMB200EK-2 [alias]	A	same as above
Description	Electrical interlock (auxiliary contact) kit for QMB/QMJ switches; suffix -1 = 1 NO + 1 NC, -2 = 2 NO + 2 NC; for motor control or auxiliary circuits; field installable (QMB 30-200 A; QMJ 30-400 A)	A	S96 pp. 9, 15; Table 4 note a; oem_spec
Application	accessory	A	S96 oem_spec
Breaker compatibility	200 A QMB units and QMJ365; listed for QMB224W, QMB324W, QMB264W, QMB364W, QMJ365	A	S96 Tables 4, 6; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	contact ratings, Kit contents		

EDH-SQD-00280	QMB300EK	Square D	breaker-accessory	STATUS UNKNOWN

QMB electrical interlock kit QMB300EK

OEM part number	QMB300EK	A	S96 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB300EK-1	A	S96 alias; Table 4 note a; oem_spec
	QMB300EK-2 [alias]	A	same as above
Description	Electrical interlock (auxiliary contact) kit for QMB/QMJ switches; suffix -1 = 1 NO + 1 NC, -2 = 2 NO + 2 NC; for motor control or auxiliary circuits; field installable (QMB 30-200 A; QMJ 30-400 A)	A	S96 pp. 9, 15; Table 4 note a; oem_spec
Application	accessory	A	S96 oem_spec
Breaker compatibility	30 A and 60 A (4.5 in.) QMB units; QMJ361T; listed for QMB221TW, QMB221HW, QMB222TW, QMB222HW, QMB321TW, QMB321HW, QMB322TW, QMB322HW, QMB261TW, QMB261HW, QMB361TW, QMB361HW, QMJ361T	A	S96 Tables 4, 6; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	contact ratings, Kit contents		

EDH-SQD-00273	QMB36R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB36R

OEM part number	QMB36R	A	S96 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for QMB switch units (30 A 600 V / 60 A 240 V positions per Table 4); with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S96 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S96 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S96 p. 8; inference
Breaker compatibility	Listed for: QMB222TW, QMB222HW, QMB322TW, QMB322HW, QMB261TW, QMB261HW, QMB361TW, QMB361HW, QMB362T21W, QMB363T31W	A	S96 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00277	QMB4060R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB4060R

OEM part number	QMB4060R	A	S96 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 400 A and 600 A QMB switch units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S96 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S96 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S96 p. 8; inference
Breaker compatibility	Listed for: QMB225W, QMB325W, QMB326W, QMB365W, QMB366W	A	S96 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00274	QMB60R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB60R

OEM part number	QMB60R	A	S96 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 60 A 600 V QMB switch units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S96 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S96 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S96 p. 8; inference
Breaker compatibility	Listed for: QMB262TW, QMB262HW, QMB362TW, QMB362HW, QMB362T21W, QMB363T32W	A	S96 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00281	QMB610EK	Square D	breaker-accessory	STATUS UNKNOWN

QMB electrical interlock kit QMB610EK

OEM part number	QMB610EK	A	S96 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB610EK-1	A	S96 alias; Table 4 note a; oem_spec
	QMB610EK-2 [alias]	A	same as above
Description	Electrical interlock (auxiliary contact) kit for QMB/QMJ switches; suffix -1 = 1 NO + 1 NC, -2 = 2 NO + 2 NC; for motor control or auxiliary circuits; field installable (QMB 30-200 A; QMJ 30-400 A)	A	S96 pp. 9, 15; Table 4 note a; oem_spec
Application	accessory	A	S96 oem_spec
Breaker compatibility	60-100 A (6/7.5 in.) QMB units and QMJ362T-QMJ364H; listed for QMB223TW, QMB223HW, QMB323TW, QMB323HW, QMB262TW, QMB262HW, QMB263TW, QMB263HW, QMB362TW, QMB362HW, QMB362T21W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMJ362T, QMJ363T, QMJ363H, QMJ364T, QMJ364H	A	S96 Tables 4, 6; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	contact ratings, Kit contents		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00339	**4052017302**	QMB363TW Series E1 renewal part: Arc shield	QMB363TW, Series E1 (E01) A	unknown
EDH-SQD-00338	**4052021450**	QMB363TW Series E1 renewal part: Arc suppressor assembly	QMB363TW, Series E1 (E01) A	unknown
EDH-SQD-00341	**4052021650**	QMB363TW Series E1 renewal part: Load base assembly	QMB363TW, Series E1 (E01) A	unknown
EDH-SQD-00346	**4052031850**	QMB367W Series E1 renewal part: Arc suppressor assembly	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00348	**4052036750**	QMB367W Series E1 renewal part: Load base assembly	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00347	**4052085601**	QMB367W Series E1 renewal part: Arc shield	QMB367W, Series E1 (E01) A	unknown

EDH-SQD-00339	4052017302	Square D	other	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Arc shield

OEM part number	4052017302	**A**	S130 oem_spec
Description	Arc shield (top cover)	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 1 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00338	4052021450	Square D	other	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Arc suppressor assembly

OEM part number	4052021450	**A**	S130 oem_spec
Description	Arc suppressor assembly	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 1 per switch (twin = per switch)	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00341	4052021650	Square D	other	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Load base assembly

OEM part number	4052021650	**A**	S130 oem_spec
Description	Load base assembly (includes lugs)	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 1 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00346	4052031850	Square D	other	STATUS UNKNOWN

QMB367W Series E1 renewal part: Arc suppressor assembly

OEM part number	4052031850	**A**	S131 oem_spec
Description	Arc suppressor assembly	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 3 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00348	4052036750	Square D	other	STATUS UNKNOWN

QMB367W Series E1 renewal part: Load base assembly

OEM part number	4052036750	**A**	S131 oem_spec
Description	Load base assembly (includes lugs)	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 3 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00347	4052085601	Square D	other	STATUS UNKNOWN

QMB367W Series E1 renewal part: Arc shield

OEM part number	4052085601	A	S131 oem_spec
Description	Arc shield	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 3 per switch	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

4.13 QMB-LEGACY — Legacy QMB distribution (pre-October-1984 QM and QW interiors)

FAM-SQD-010 · panelboard · aka QM, QM interior, QMB Saflex, QMB Series 1-4, QW, QW interior, Saflex, Saflex panelboard, old style QMB · markings: Square D

Older QMB fusible distribution used in panelboards and switchboards before the current (Series E1) design. Legacy switch catalog numbers had no 'W' suffix (e.g. QMB3606T, QMB310T, QMB3620, QMB3240, QMB2240, QMB3260). Current-design units are retrofitted using plug-on extension assemblies (QMB306EX, QMB306LEX, QMB310EX, QMB310LEX, QMB-320-EX) in QW interiors; QM interiors built 1961-1984 accept some current units directly.

Evidence record from 1970 Digest: QMB panelboards 120/208 V to 600 V AC, 125/250 V DC; units 30-200 A plug-on (31 in W box) and 400/600 A bolt-on (38 in W box); 1200 A lugs / 600 A main switch. Mounting assemblies not required in 31 in wide QMB panels; 'Extension Assemblies' (QMB-xxx-EX) required for 30-200 A units in 38 in wide panels (e.g. QW-6789-7). Blanks QM-1BL/3BL/6BL/9BL, solid neutrals QM-1SN..QM-6SN, 250 V adaptor kits QMB-63-AL, QMB-103-AL, QMB-106-AL.

Attribute	Value	Cl.	Sources
Status	obsolete; old-design blank fillers obsolete with no replacement	A	S129 oem_spec
Era of manufacture	QM (31 in. wide box) and QW (38 in. wide box) interiors built before October 1984; pre-1961 interiors (incl. round bus bar) have no replacement switches (From several Schneider FAQs (FA119872, FA88047, FA127541, FA100372))	A	same as above
Saflex	Schneider FAQ refers to 'an old QMB Saflex Panelboard' (QW type 38 in. box with flatwise bus needs QMB310EX for current CB units); surplus listings label QMB3606T Series 2/4 units 'QMB Saflex' ('Saflex' = legacy QMB panelboard trade name per OEM FAQ; surplus label corroborates)	A	S141, S142 oem_spec
Ratings 1970	Units 30-200 A 2/3-pole plug-on; 400/600 A 2/3-pole bolt-on; mains 1200 A lugs / 600 A switch; boxes 31 in W x ~10-3/4 in D and 38 in W x ~14-3/4 in D (Depth fractions OCR)	B	S463 Digest 152 (1970) p.55; oem_spec
Interior generations	Type QM in 31 in wide box built before 1961: interior mounting rails face inward, Series 1-4 switches (30-200 A), no compatible replacement switch. Type QM in 31 in wide box 1961-Oct 1984: rails face outward, accepts Series 1-4 and Series D2 switches (D2 includes rail extensions). Type QW in 38 in wide box before 1984: bolt-on 400/600 A Series 1-4 switches; 30-200 A D2 switches need plug-on extension assemblies. Type QMB after Oct 1984 (35 or 38 in wide box): Series E1/E2 only.	A	S609 p. 13-4 Table 13.1; oem_spec

Key documents: S129 FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified) QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T; S132 FA119872 FAQ FA119872: replacement for a QMB310T, series 1 through 4 switch; S133 FA127541 FAQ FA127541: replacement for a QMB3620; S134 FA88047 FAQ FA88047: replacement for a QMB3606T; S135 FA100372 FAQ FA100372: replacement for a QMB3260 600 A QMB switch; S136 FA128647 FAQ FA128647: replacement parts for a QMB3240; S137 FA122651 FAQ FA122651: replacement switch for the old QMB2240, 2P 400 A QMB switch; S140 FA113960 FAQ FA113960: replacement branch switch for the old QMB210T Series 1 through 4; S141 FA118445 FAQ FA118445: part number for a 300 A / 3P circuit breaker unit for an old QMB Saflex pane; S142 MB Glick surplus listing: Square D QMB3606T QMB Saflex panelboard switch unit 60 A Series ; S463 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P; S609 Digest Section 13 (2009); distributor file name Square_D_QM3890B_Catalog.pdf Square D Digest (2009) Section 13 - Obsolescent Panelboards (QMB RTI, QMB replacement unit

Also fits this family (entry printed elsewhere): PK32DGTA, QMB306EX, QMB310EX, QMB320EX

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00575	**QMB-206-EX**	Square D QMB 2-pole extension assembly, 6 in unit (600 V, 38 in wide QMB)	—	1970 catalog item; current status unknown
EDH-SQD-00576	**QMB-210-EX**	Square D QMB 2-pole extension assembly, 7-1/2 in unit (600 V, 38 in wide QMB)	—	1970 catalog item; current status unknown
EDH-SQD-00577	**QMB-220-EX**	Square D QMB 2-pole extension assembly, 9 in unit (600 V, 38 in wide QMB)	—	1970 catalog item; current status unknown

EDH-SQD-00575	QMB-206-EX	Square D	branch-connector-kit	1970 CATALOG ITEM; CUR

Square D QMB 2-pole extension assembly, 6 in unit (600 V, 38 in wide QMB)

OEM part number	QMB-206-EX	A	S463 oem_spec
Description	Extension assembly, two pole, unit height 6 in, 600 V; required to mount 30-200 A QMB units in 38 in wide QMB panelboards	A	S463 Digest 152 (1970) p.83; oem_spec
Application	branch (30-200 A QMB unit in 38 in wide panel)	A	S463 Digest 152 (1970) p.83, 85; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		
Open question	*3-pole counterpart is QMB306EX (already catalogued)*		

EDH-SQD-00576	QMB-210-EX	Square D	branch-connector-kit	1970 CATALOG ITEM; CUR

Square D QMB 2-pole extension assembly, 7-1/2 in unit (600 V, 38 in wide QMB)

OEM part number	QMB-210-EX	A	S463 oem_spec
Description	Extension assembly, two pole, unit height 7-1/2 in, 600 V; required to mount 30-200 A QMB units in 38 in wide QMB panelboards	A	S463 Digest 152 (1970) p.83; oem_spec
Application	branch (30-200 A QMB unit in 38 in wide panel)	A	S463 Digest 152 (1970) p.83, 85; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		
Open question	*3-pole counterpart is QMB310EX (already catalogued)*		

EDH-SQD-00577	QMB-220-EX	Square D	branch-connector-kit	1970 CATALOG ITEM; CUR

Square D QMB 2-pole extension assembly, 9 in unit (600 V, 38 in wide QMB)

OEM part number	QMB-220-EX	A	S463 oem_spec
Description	Extension assembly, two pole, unit height 9 in, 600 V; required to mount 30-200 A QMB units in 38 in wide QMB panelboards	A	S463 Digest 152 (1970) p.83; oem_spec
Application	branch (30-200 A QMB unit in 38 in wide panel)	A	S463 Digest 152 (1970) p.83, 85; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		
Open question	*3-pole counterpart is QMB320EX (already catalogued)*		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00332	**QMB3300LA**	QMB circuit breaker unit QMB3300LA	—	unknown
EDH-SQD-00331	**QMB3400LA**	QMB circuit breaker unit QMB3400LA	—	unknown

EDH-SQD-00332	QMB3300LA	Square D	breaker-mounting-kit	STATUS UNKNOWN

QMB circuit breaker unit QMB3300LA

OEM part number	QMB3300LA	A	S141 oem_spec
Description	QMB circuit breaker unit, 3P 300 A (LA frame) for old QMB Saflex panelboards; not for QM panelboards made before 1961; QMB310EX needed for QW 38 in. flatwise-bus panels	A	same as above
Application	branch	A	same as above
Breaker frame	LA (implied by 'LA' suffix)	C	S141 inference
Cross-links	Families: QMB-LEGACY, QMB · Breakers: QMB circuit breaker units (H-, J-, L-frame), LA / LH (I-Line)		
Not yet documented	current status, lug kit		
Open question	*Supplemental Digest reference for QMB3400LA not retrieved*		

EDH-SQD-00331	QMB3400LA	Square D	breaker-mounting-kit	STATUS UNKNOWN

QMB circuit breaker unit QMB3400LA

OEM part number	QMB3400LA	A	S135 oem_spec
Description	QMB circuit breaker unit, 3P 400 A (LA frame), 7.5 in. mounting space; replacement for legacy QMB3240/QMB2240/QMB3260/QMB3640; fits QMB interiors 1961-Oct 1984 (QMB310EX needed in QW)	A	S135, S136, S137, S129 oem_spec
Application	branch	A	S135 oem_spec
Breaker frame	LA (implied by 'LA' suffix)	C	S135 inference
Cross-links	Families: QMB-LEGACY, QMB · Breakers: QMB circuit breaker units (H-, J-, L-frame), LA / LH (I-Line)		
Not yet documented	current status, lug kit		
Open question	*Supplemental Digest reference for QMB3400LA not retrieved*		

Busbar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00898	**QMB303LEX**	QMB plug-on extension assembly for 30-30 A 3 in switch (QW interiors)	—	unknown

EDH-SQD-00898	QMB303LEX	Square D	busbar	STATUS UNKNOWN

QMB plug-on extension assembly for 30-30 A 3 in switch (QW interiors)

OEM part number	QMB303LEX	A	S609 2009 Digest 13-5 Table 13.3; oem_spec
Description	Plug-on extension assembly (extends the bus) for 30-30 A switch, 3 in mounting height; required when installing 30-200 A plug-on units in blank spaces of a QW interior in the 38 in wide box; not the same as rail extension assemblies packed with Series D2 switches	A	S609 oem_spec
Cross-links	Families: QMB-LEGACY		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00568	**QM-1SN**	Square D QMB solid neutral assembly 200 A	—	1970 catalog item; current status unknown
EDH-SQD-00569	**QM-2SN**	Square D QMB solid neutral assembly 200 A	—	1970 catalog item; current status unknown
EDH-SQD-00570	**QM-4SN**	Square D QMB solid neutral assembly 400 A	—	1970 catalog item; current status unknown
EDH-SQD-00571	**QM-6SN**	Square D QMB solid neutral assembly 600 A	—	1970 catalog item; current status unknown

EDH-SQD-00568	QM-1SN	Square D	neutral-assembly	1970 CATALOG ITEM; CUR

Square D QMB solid neutral assembly 200 A

OEM part number	QM-1SN	A	S463 oem_spec
Description	QMB solid neutral assembly 200 A for interior QMB-1832-2 only; mounted in main lugs compartment	A	S463 Digest 152 (1970) p.80; oem_spec
Current rating	200 A	A	S463 oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		
Open question	*OCR reads 'COM-1 SN' for QM-1SN; confirm*		

EDH-SQD-00569	QM-2SN	Square D	neutral-assembly	1970 CATALOG ITEM; CUR

Square D QMB solid neutral assembly 200 A

OEM part number	QM-2SN	A	S463 oem_spec
Description	QMB solid neutral assembly 200 A ; mounted in main lugs compartment	A	S463 Digest 152 (1970) p.80; oem_spec
Current rating	200 A	A	S463 oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00570	QM-4SN	Square D	neutral-assembly	1970 CATALOG ITEM; CUR

Square D QMB solid neutral assembly 400 A

OEM part number	QM-4SN	A	S463 oem_spec
Description	QMB solid neutral assembly 400 A ; mounted in main lugs compartment	A	S463 Digest 152 (1970) p.80; oem_spec
Current rating	400 A	A	S463 oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00571	QM-6SN	Square D	neutral-assembly	1970 CATALOG ITEM; CUR

Square D QMB solid neutral assembly 600 A

OEM part number	QM-6SN	A	S463 oem_spec
Description	QMB solid neutral assembly 600 A ; mounted in main lugs compartment	A	S463 Digest 152 (1970) p.80; oem_spec
Current rating	600 A	A	S463 oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00564	**QM-1BL**	Square D QMB (QM interior) blank, 1-1/2 in	—	1970 catalog item; current status unknown
EDH-SQD-00565	**QM-3BL**	Square D QMB (QM interior) blank, 3 in	—	1970 catalog item; current status unknown
EDH-SQD-00566	**QM-6BL**	Square D QMB (QM interior) blank, 6 in	—	1970 catalog item; current status unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00567	**QM-9BL**	Square D QMB (QM interior) blank, 9 in	—	1970 catalog item; current status unknown
EDH-SQD-00333	**QW1BL**	Legacy QW interior blank filler QW1BL	—	obsolete, NLA, no replacement; Schneider suggests local shee
EDH-SQD-00334	**QW3BL**	Legacy QW interior blank filler QW3BL	—	obsolete, NLA, no replacement; Schneider suggests local shee

EDH-SQD-00564 QM-1BL Square D filler-plate 1970 CATALOG ITEM; CUR

Square D QMB (QM interior) blank, 1-1/2 in

OEM part number	QM-1BL	A	S463 oem_spec
Description	QMB Table 3 blank 1-1/2 in high	A	S463 Digest 152 (1970) p.80; oem_spec
Dimensions	1-1/2 in high (OCR)	B	S463 oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Material		

EDH-SQD-00565 QM-3BL Square D filler-plate 1970 CATALOG ITEM; CUR

Square D QMB (QM interior) blank, 3 in

OEM part number	QM-3BL	A	S463 oem_spec
Description	QMB Table 3 blank 3 in high	A	S463 Digest 152 (1970) p.80; oem_spec
Dimensions	3 in high (OCR)	B	S463 oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Material		

EDH-SQD-00566 QM-6BL Square D filler-plate 1970 CATALOG ITEM; CUR

Square D QMB (QM interior) blank, 6 in

OEM part number	QM-6BL	A	S463 oem_spec
Description	QMB Table 3 blank 6 in high	A	S463 Digest 152 (1970) p.80; oem_spec
Dimensions	6 in high (OCR)	B	S463 oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Material		

EDH-SQD-00567 QM-9BL Square D filler-plate 1970 CATALOG ITEM; CUR

Square D QMB (QM interior) blank, 9 in

OEM part number	QM-9BL	A	S463 oem_spec
Description	QMB Table 3 blank 9 in high	A	S463 Digest 152 (1970) p.80; oem_spec
Dimensions	9 in high (OCR)	B	S463 oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Material		

EDH-SQD-00333	QW1BL	Square D	filler-plate	OBSOLETE, NLA, NO REPL

Legacy QW interior blank filler QW1BL

OEM part number	QW1BL	A	S136, S137 oem_spec
Description	Blank filler plate for old-design (QW) QMB interior, 1.5 in. (FA122651 summary called QW3BL 4.5 in.; FA128647 arithmetic implies 3 in.)	B	same as above
Status	obsolete, NLA, no replacement; Schneider suggests local sheet-metal fabrication	A	S136, S137, S135 oem_spec
Aftermarket / reproduction	Fabricated filler plates (local sheet metal shop) per OEM suggestion	A	S135 oem_spec
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, Mounting-hole pattern, Material		
Open question	*Obtain an original QW1BL/QW3BL for reverse-engineering (dimensions, hole pattern, gauge) - strong remanufacture candidate*		

EDH-SQD-00334	QW3BL	Square D	filler-plate	OBSOLETE, NLA, NO REPL

Legacy QW interior blank filler QW3BL

OEM part number	QW3BL	A	S136, S137 oem_spec
Description	Blank filler plate for old-design (QW) QMB interior, 3 in. (FAQ FA128647: one QW1BL + one QW3BL fill 4.5 in.) (FA122651 summary called QW3BL 4.5 in.; FA128647 arithmetic implies 3 in.)	B	same as above
Status	obsolete, NLA, no replacement; Schneider suggests local sheet-metal fabrication	A	S136, S137, S135 oem_spec
Aftermarket / reproduction	Fabricated filler plates (local sheet metal shop) per OEM suggestion	A	S135 oem_spec
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, Mounting-hole pattern, Material		
Open question	*Obtain an original QW1BL/QW3BL for reverse-engineering (dimensions, hole pattern, gauge) - strong remanufacture candidate*		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00863	**QM-3132-TS**	Legacy 1970 QMB (QM) 4-piece front for QM-3132-B box	—	Obsolete
EDH-SQD-00865	**QM-3144-TS**	Legacy 1970 QMB (QM) 4-piece front for QM-3144-B box	—	Obsolete
EDH-SQD-00867	**QM-3156-TS**	Legacy 1970 QMB (QM) 4-piece front for QM-3156-B box	—	Obsolete
EDH-SQD-00869	**QM-3168-TS**	Legacy 1970 QMB (QM) 4-piece front for QM-3168-B box	—	Obsolete
EDH-SQD-00871	**QM-3180-TS**	Legacy 1970 QMB (QM) 4-piece front for QM-3180-B box	—	Obsolete
EDH-SQD-00873	**QM-3192-TS**	Legacy 1970 QMB (QM) 4-piece front for QM-3192-B box	—	Obsolete

EDH-SQD-00863	QM-3132-TS	Square D	trim	OBSOLETE

Legacy 1970 QMB (QM) 4-piece front for QM-3132-B box

OEM part number	QM-3132-TS	A	S463 Digest 152 (1970) p.78 Table 2; oem_spec
Description	QMB 4-piece front, finished gray baked enamel, without door, concealed self-adjusting trim clamps; for QM-3132-B box	A	S463 oem_spec
Status	Obsolete	B	S463 inference
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00865	QM-3144-TS	Square D	trim	OBSOLETE

Legacy 1970 QMB (QM) 4-piece front for QM-3144-B box

OEM part number	QM-3144-TS	A	S463 Digest 152 (1970) p.78 Table 2; oem_spec
Description	QMB 4-piece front, finished gray baked enamel, without door, concealed self-adjusting trim clamps; for QM-3144-B box	A	S463 oem_spec
Status	Obsolete	B	S463 inference
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00867	QM-3156-TS	Square D	trim	OBSOLETE

Legacy 1970 QMB (QM) 4-piece front for QM-3156-B box

OEM part number	QM-3156-TS	A	S463 Digest 152 (1970) p.78 Table 2; oem_spec
Description	QMB 4-piece front, finished gray baked enamel, without door, concealed self-adjusting trim clamps; for QM-3156-B box	A	S463 oem_spec
Status	Obsolete	B	S463 inference
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00869	QM-3168-TS	Square D	trim	OBSOLETE

Legacy 1970 QMB (QM) 4-piece front for QM-3168-B box

OEM part number	QM-3168-TS	A	S463 Digest 152 (1970) p.78 Table 2; oem_spec
Description	QMB 4-piece front, finished gray baked enamel, without door, concealed self-adjusting trim clamps; for QM-3168-B box	A	S463 oem_spec
Status	Obsolete	B	S463 inference
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00871	QM-3180-TS	Square D	trim	OBSOLETE

Legacy 1970 QMB (QM) 4-piece front for QM-3180-B box

OEM part number	QM-3180-TS	A	S463 Digest 152 (1970) p.78 Table 2; oem_spec
Description	QMB 4-piece front, finished gray baked enamel, without door, concealed self-adjusting trim clamps; for QM-3180-B box	A	S463 oem_spec
Status	Obsolete	B	S463 inference
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00873	QM-3192-TS	Square D	trim	OBSOLETE

Legacy 1970 QMB (QM) 4-piece front for QM-3192-B box

OEM part number	QM-3192-TS	A	S463 Digest 152 (1970) p.78 Table 2; oem_spec
Description	QMB 4-piece front, finished gray baked enamel, without door, concealed self-adjusting trim clamps; for QM-3192-B box	A	S463 oem_spec
Status	Obsolete	B	S463 inference
Cross-links	Families: QMB-LEGACY		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00862	**QM-3132-B**	Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 32 in H	—	Obsolete; 31 in wide QM boxes belong to pre-Oct-1984 QM inte
EDH-SQD-00864	**QM-3144-B**	Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 44 in H	—	Obsolete; 31 in wide QM boxes belong to pre-Oct-1984 QM inte
EDH-SQD-00866	**QM-3156-B**	Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 56 in H	—	Obsolete; 31 in wide QM boxes belong to pre-Oct-1984 QM inte
EDH-SQD-00868	**QM-3168-B**	Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 68 in H	—	Obsolete; 31 in wide QM boxes belong to pre-Oct-1984 QM inte

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00870	**QM-3180-B**	Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 80 in H	—	Obsolete; 31 in wide QM boxes belong to pre-Oct-1984 QM inte
EDH-SQD-00872	**QM-3192-B**	Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 92 in H	—	Obsolete; 31 in wide QM boxes belong to pre-Oct-1984 QM inte

EDH-SQD-00862 **QM-3132-B** Square D box/enclosure **OBSOLETE; 31 IN WIDE Q**

Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 32 in H

OEM part number	QM-3132-B	**A**	S463 Digest 152 (1970) p.78 (leaf 79) Table 2; oem_spec
Description	QMB unassembled-type box, without knockouts, gray baked enamel, 31 in wide x 10-5/8 in deep, 32 in high (box height includes unit mounting space, main lug and solid neutral compartment, top and bottom gutters); interiors QMB-1832-2	**A**	S463 oem_spec
Finish / plating	Gray baked enamel	**A**	same as above
Dimensions	31 in W x 10-5/8 in D x 32 in H	**A**	same as above
Status	Obsolete; 31 in wide QM boxes belong to pre-Oct-1984 QM interiors (2009 Digest p.13-4)	**A**	S609, S463 oem_spec
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00864 **QM-3144-B** Square D box/enclosure **OBSOLETE; 31 IN WIDE Q**

Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 44 in H

OEM part number	QM-3144-B	**A**	S463 Digest 152 (1970) p.78 (leaf 79) Table 2; oem_spec
Description	QMB unassembled-type box, without knockouts, gray baked enamel, 31 in wide x 10-5/8 in deep, 44 in high (box height includes unit mounting space, main lug and solid neutral compartment, top and bottom gutters); interiors QMB-2744-2, QMB-2444-4	**A**	S463 oem_spec
Finish / plating	Gray baked enamel	**A**	same as above
Dimensions	31 in W x 10-5/8 in D x 44 in H	**A**	same as above
Status	Obsolete; 31 in wide QM boxes belong to pre-Oct-1984 QM interiors (2009 Digest p.13-4)	**A**	S609, S463 oem_spec
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00866 **QM-3156-B** Square D box/enclosure **OBSOLETE; 31 IN WIDE Q**

Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 56 in H

OEM part number	QM-3156-B	**A**	S463 Digest 152 (1970) p.78 (leaf 79) Table 2; oem_spec
Description	QMB unassembled-type box, without knockouts, gray baked enamel, 31 in wide x 10-5/8 in deep, 56 in high (box height includes unit mounting space, main lug and solid neutral compartment, top and bottom gutters); interiors QMB-3956-2, QMB-3656-4	**A**	S463 oem_spec
Finish / plating	Gray baked enamel	**A**	same as above
Dimensions	31 in W x 10-5/8 in D x 56 in H	**A**	same as above
Status	Obsolete; 31 in wide QM boxes belong to pre-Oct-1984 QM interiors (2009 Digest p.13-4)	**A**	S609, S463 oem_spec
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00868	QM-3168-B	Square D	box/enclosure	OBSOLETE; 31 IN WIDE Q

Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 68 in H

OEM part number	QM-3168-B	A	S463 Digest 152 (1970) p.78 (leaf 79) Table 2; oem_spec
Description	QMB unassembled-type box, without knockouts, gray baked enamel, 31 in wide x 10-5/8 in deep, 68 in high (box height includes unit mounting space, main lug and solid neutral compartment, top and bottom gutters); interiors QMB-4868-4, QMB-4868-6	A	S463 oem_spec
Finish / plating	Gray baked enamel	A	same as above
Dimensions	31 in W x 10-5/8 in D x 68 in H	A	same as above
Status	Obsolete; 31 in wide QM boxes belong to pre-Oct-1984 QM interiors (2009 Digest p.13-4)	A	S609, S463 oem_spec
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00870	QM-3180-B	Square D	box/enclosure	OBSOLETE; 31 IN WIDE Q

Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 80 in H

OEM part number	QM-3180-B	A	S463 Digest 152 (1970) p.78 (leaf 79) Table 2; oem_spec
Description	QMB unassembled-type box, without knockouts, gray baked enamel, 31 in wide x 10-5/8 in deep, 80 in high (box height includes unit mounting space, main lug and solid neutral compartment, top and bottom gutters); interiors QMB-6080-6	A	S463 oem_spec
Finish / plating	Gray baked enamel	A	same as above
Dimensions	31 in W x 10-5/8 in D x 80 in H	A	same as above
Status	Obsolete; 31 in wide QM boxes belong to pre-Oct-1984 QM interiors (2009 Digest p.13-4)	A	S609, S463 oem_spec
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00872	QM-3192-B	Square D	box/enclosure	OBSOLETE; 31 IN WIDE Q

Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 92 in H

OEM part number	QM-3192-B	A	S463 Digest 152 (1970) p.78 (leaf 79) Table 2; oem_spec
Description	QMB unassembled-type box, without knockouts, gray baked enamel, 31 in wide x 10-5/8 in deep, 92 in high (box height includes unit mounting space, main lug and solid neutral compartment, top and bottom gutters); interiors QMB-7592-2, QMB-7292-6	A	S463 oem_spec
Finish / plating	Gray baked enamel	A	same as above
Dimensions	31 in W x 10-5/8 in D x 92 in H	A	same as above
Status	Obsolete; 31 in wide QM boxes belong to pre-Oct-1984 QM interiors (2009 Digest p.13-4)	A	S609, S463 oem_spec
Cross-links	Families: QMB-LEGACY		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00573	**QMB-103-AL**	Square D QMB adaptor kit, convert one 100 A switch to 30 A (250 V units only)	—	1970 catalog item; current status unknown
EDH-SQD-00574	**QMB-106-AL**	Square D QMB adaptor kit, convert one 100 A switch to 60 A (250 V units only)	—	1970 catalog item; current status unknown
EDH-SQD-00327	**QMB306LEX**	QMB plug-on extension assembly QMB306LEX (legacy QW retrofit)	—	unknown
EDH-SQD-00329	**QMB310LEX**	QMB plug-on extension assembly QMB310LEX (legacy QW retrofit)	—	unknown
EDH-SQD-00572	**QMB-63-AL**	Square D QMB adaptor kit, convert one 60 A switch to 30 A (250 V units only)	—	1970 catalog item; current status unknown

EDH-SQD-00573	QMB-103-AL	Square D	conversion-kit	1970 CATALOG ITEM; CUR

Square D QMB adaptor kit, convert one 100 A switch to 30 A (250 V units only)

OEM part number	QMB-103-AL	A	S463 oem_spec
Description	Adaptor kit - 250 V units only - to convert one switch from 100 A to 30 A, $7.30	A	S463 Digest 152 (1970) p.80; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00574	QMB-106-AL	Square D	conversion-kit	1970 CATALOG ITEM; CUR

Square D QMB adaptor kit, convert one 100 A switch to 60 A (250 V units only)

OEM part number	QMB-106-AL	A	S463 oem_spec
Description	Adaptor kit - 250 V units only - to convert one switch from 100 A to 60 A, $7.30	A	S463 Digest 152 (1970) p.80; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00327	QMB306LEX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB306LEX (legacy QW retrofit)

OEM part number	QMB306LEX (Seen via search summary of Schneider FAQ only)	C	S129 oem_spec
Description	Plug-on extension kit for QW interiors (flat bus) used with QMB321T / QMB322TD replacing QMB303T / QMB306T	C	same as above
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S129 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00329	QMB310LEX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB310LEX (legacy QW retrofit)

OEM part number	QMB310LEX	A	S132 oem_spec
Description	Plug-on extension assembly for QW interiors with flat bus bars; used with QMB323TD replacing QMB310T / QMB210T	A	S132, S140 oem_spec
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S132, S140 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00572	QMB-63-AL	Square D	conversion-kit	1970 CATALOG ITEM; CUR

Square D QMB adaptor kit, convert one 60 A switch to 30 A (250 V units only)

OEM part number	QMB-63-AL	A	S463 oem_spec
Description	Adaptor kit - 250 V units only - to convert one switch from 60 A to 30 A, $7.30	A	S463 Digest 152 (1970) p.80; oem_spec
Status	1970 catalog item; current status unknown	D	S463 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00899	**QMB3203T**	Obsolete QMB Series 1-4 branch switch QMB3203T (30-30 A 240 Vac, 4.5 in)	—	discontinued
EDH-SQD-00903	**QMB3210M**	Obsolete QMB Series 4 main switch unit QMB3210M (100 A 240 Vac)	—	discontinued
EDH-SQD-00900	**QMB3220**	Obsolete QMB Series 1-4 branch switch QMB3220 (200 A 240 Vac, 9 in)	—	discontinued
EDH-SQD-00904	**QMB3220M**	Obsolete QMB Series 4 main switch unit QMB3220M (200 A 240 Vac)	—	discontinued
EDH-SQD-00909	**QMB324M**	QMB obsolescent main switch unit QMB324M (200 A 240 Vac, replaces Series 4)	—	unknown
EDH-SQD-00901	**QMB3603T**	Obsolete QMB Series 1-4 branch switch QMB3603T (30-30 A 600 Vac, 4.5 in)	—	discontinued
EDH-SQD-00905	**QMB3610M**	Obsolete QMB Series 4 main switch unit QMB3610M (100 A 600 Vac)	—	discontinued
EDH-SQD-00906	**QMB3610MJ**	Obsolete QMB Series 4 main switch unit QMB3610MJ (100 A 600 Vac, Class J)	—	discontinued
EDH-SQD-00902	**QMB3610T**	Obsolete QMB Series 1-4 branch switch QMB3610T (100-100 A 600 Vac, 7.5 in)	—	discontinued
EDH-SQD-00907	**QMB3620M**	Obsolete QMB Series 4 main switch unit QMB3620M (200 A 600 Vac)	—	discontinued
EDH-SQD-00908	**QMB3620MJ**	Obsolete QMB Series 4 main switch unit QMB3620MJ (200 A 600 Vac, Class J)	—	discontinued
EDH-SQD-00910	**QMB364M**	QMB obsolescent main switch unit QMB364M (200 A 600 Vac, replaces Series 4)	—	unknown

EDH-SQD-00899	QMB3203T	Square D	switch-unit	DISCONTINUED

Obsolete QMB Series 1-4 branch switch QMB3203T (30-30 A 240 Vac, 4.5 in)

OEM part number	QMB3203T	A	S609 2009 Digest 13-5 Table 13.1; oem_spec
Alternate / superseded numbers	QMB321T	A	S609 superseded_by; oem_spec
Description	Obsolescent Series 1-4 three-pole branch switch unit, 30-30 A 240 Vac, 4.5 in; no longer available, number given only for cross-reference	A	same as above
Status	discontinued	A	same as above
Replacement / successor	Series D2 QMB321T (rail extension assemblies packed with every D2 switch); when used to replace a Series 1-4 3 in switch a blank filler plate is also required - purchase from local sheet-metal fabricator (drawing from Peru TAG)	A	same as above
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00903	QMB3210M	Square D	switch-unit	DISCONTINUED

Obsolete QMB Series 4 main switch unit QMB3210M (100 A 240 Vac)

OEM part number	QMB3210M	A	S609 2009 Digest 13-5 Table 13.4; oem_spec
Alternate / superseded numbers	QMB323M (QMB323M, QMB363M, QMB363MJ, QMB364MJ order only from the Lexington plant (2009))	A	S609 superseded_by; oem_spec
Description	Series 4 main switch unit, 3-pole, 100 A 240 Vac, 9 in unit height	A	same as above
Application	main	A	same as above
Status	discontinued	A	same as above
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00900	QMB3220	Square D	switch-unit	DISCONTINUED

Obsolete QMB Series 1-4 branch switch QMB3220 (200 A 240 Vac, 9 in)

OEM part number	QMB3220	A	S609 2009 Digest 13-5 Table 13.1; oem_spec
Alternate / superseded numbers	QMB324	A	S609 superseded_by; oem_spec
Description	Obsolescent Series 1-4 three-pole branch switch unit, 200 A 240 Vac, 9 in; no longer available, number given only for cross-reference	A	same as above
Status	discontinued	A	same as above
Replacement / successor	Series D2 QMB324 (rail extension assemblies packed with every D2 switch)	A	same as above
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00904	QMB3220M	Square D	switch-unit	DISCONTINUED

Obsolete QMB Series 4 main switch unit QMB3220M (200 A 240 Vac)

OEM part number	QMB3220M	A	S609 2009 Digest 13-5 Table 13.4; oem_spec
Alternate / superseded numbers	QMB324M (QMB323M, QMB363M, QMB363MJ, QMB364MJ order only from the Lexington plant (2009))	A	S609 superseded_by; oem_spec
Description	Series 4 main switch unit, 3-pole, 200 A 240 Vac, 9 in unit height	A	same as above
Application	main	A	same as above
Status	discontinued	A	same as above
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00909	QMB324M	Square D	switch-unit	STATUS UNKNOWN

QMB obsolescent main switch unit QMB324M (200 A 240 Vac, replaces Series 4)

OEM part number	QMB324M	A	S609 2009 Digest 13-5 Table 13.4; oem_spec
Description	Main switch unit 3-pole 200 A 240 Vac, 9 in, replaces Series 4 unit QMB3220M	A	S609 oem_spec
Application	main	A	same as above
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00901	QMB3603T	Square D	switch-unit	DISCONTINUED

Obsolete QMB Series 1-4 branch switch QMB3603T (30-30 A 600 Vac, 4.5 in)

OEM part number	QMB3603T	A	S609 2009 Digest 13-5 Table 13.1; oem_spec
Alternate / superseded numbers	QMB361T	A	S609 superseded_by; oem_spec
Description	Obsolescent Series 1-4 three-pole branch switch unit, 30-30 A 600 Vac, 4.5 in; no longer available, number given only for cross-reference	A	same as above
Status	discontinued	A	same as above
Replacement / successor	Series D2 QMB361T (rail extension assemblies packed with every D2 switch); when used to replace a Series 1-4 3 in switch a blank filler plate is also required - purchase from local sheet-metal fabricator (drawing from Peru TAG)	A	same as above
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00905	QMB3610M	Square D	switch-unit	DISCONTINUED

Obsolete QMB Series 4 main switch unit QMB3610M (100 A 600 Vac)

OEM part number	QMB3610M	A	S609 2009 Digest 13-5 Table 13.4; oem_spec
Alternate / superseded numbers	QMB363M (QMB323M, QMB363M, QMB363MJ, QMB364MJ order only from the Lexington plant (2009))	A	S609 superseded_by; oem_spec
Description	Series 4 main switch unit, 3-pole, 100 A 600 Vac, 9 in unit height	A	same as above
Application	main	A	same as above
Status	discontinued	A	same as above
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00906	QMB3610MJ	Square D	switch-unit	DISCONTINUED

Obsolete QMB Series 4 main switch unit QMB3610MJ (100 A 600 Vac, Class J)

OEM part number	QMB3610MJ	A	S609 2009 Digest 13-5 Table 13.4; oem_spec
Alternate / superseded numbers	QMB363MJ (QMB323M, QMB363M, QMB363MJ, QMB364MJ order only from the Lexington plant (2009))	A	S609 superseded_by; oem_spec
Description	Series 4 main switch unit, 3-pole, 100 A 600 Vac, Class J, 9 in unit height	A	same as above
Application	main	A	same as above
Status	discontinued	A	same as above
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00902	QMB3610T	Square D	switch-unit	DISCONTINUED

Obsolete QMB Series 1-4 branch switch QMB3610T (100-100 A 600 Vac, 7.5 in)

OEM part number	QMB3610T	A	S609 2009 Digest 13-5 Table 13.1; oem_spec
Alternate / superseded numbers	QMB363T	A	S609 superseded_by; oem_spec
Description	Obsolescent Series 1-4 three-pole branch switch unit, 100-100 A 600 Vac, 7.5 in; no longer available, number given only for cross-reference	A	same as above
Status	discontinued	A	same as above
Replacement / successor	Series D2 QMB363T (rail extension assemblies packed with every D2 switch)	A	same as above
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00907	QMB3620M	Square D	switch-unit	DISCONTINUED

Obsolete QMB Series 4 main switch unit QMB3620M (200 A 600 Vac)

OEM part number	QMB3620M	A	S609 2009 Digest 13-5 Table 13.4; oem_spec
Alternate / superseded numbers	QMB364M (QMB323M, QMB363M, QMB363MJ, QMB364MJ order only from the Lexington plant (2009))	A	S609 superseded_by; oem_spec
Description	Series 4 main switch unit, 3-pole, 200 A 600 Vac, 9 in unit height	A	same as above
Application	main	A	same as above
Status	discontinued	A	same as above
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00908	QMB3620MJ	Square D	switch-unit	DISCONTINUED

Obsolete QMB Series 4 main switch unit QMB3620MJ (200 A 600 Vac, Class J)

OEM part number	QMB3620MJ	A	S609 2009 Digest 13-5 Table 13.4; oem_spec
Alternate / superseded numbers	QMB364MJ (QMB323M, QMB363M, QMB363MJ, QMB364MJ order only from the Lexington plant (2009))	A	S609 superseded_by; oem_spec
Description	Series 4 main switch unit, 3-pole, 200 A 600 Vac, Class J, 9 in unit height	A	same as above
Application	main	A	same as above
Status	discontinued	A	same as above
Cross-links	Families: QMB-LEGACY		

EDH-SQD-00910	QMB364M	Square D	switch-unit	STATUS UNKNOWN

QMB obsolescent main switch unit QMB364M (200 A 600 Vac, replaces Series 4)

OEM part number	QMB364M	A	S609 2009 Digest 13-5 Table 13.4; oem_spec
Description	Main switch unit 3-pole 200 A 600 Vac, 9 in, replaces Series 4 unit QMB3620M	A	S609 oem_spec
Application	main	A	same as above
Cross-links	Families: QMB-LEGACY		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00321	**QMB210T**	Legacy QMB switch QMB210T (obsolete)	—	obsolete
EDH-SQD-00324	**QMB2240**	Legacy QMB switch QMB2240 (obsolete)	—	obsolete
EDH-SQD-00355	**QMB303T**	Legacy QMB switch QMB303T (obsolete)	—	obsolete
EDH-SQD-00356	**QMB306T**	Legacy QMB switch QMB306T (obsolete)	—	obsolete
EDH-SQD-00320	**QMB310T**	Legacy QMB switch QMB310T (obsolete)	—	obsolete
EDH-SQD-00337	**QMB323TD**	QMB replacement switch QMB323TD for legacy interiors	—	unknown
EDH-SQD-00323	**QMB3240**	Legacy QMB switch QMB3240 (obsolete)	—	obsolete
EDH-SQD-00325	**QMB3260**	Legacy QMB switch QMB3260 (obsolete)	—	obsolete
EDH-SQD-00319	**QMB3606T**	Legacy QMB switch QMB3606T (obsolete)	—	obsolete
EDH-SQD-00322	**QMB3620**	Legacy QMB switch QMB3620 (obsolete)	—	obsolete
EDH-SQD-00335	**QMB362T**	QMB replacement switch QMB362T for legacy interiors	—	unknown
EDH-SQD-00336	**QMB364**	QMB replacement switch QMB364 for legacy interiors	—	unknown
EDH-SQD-00354	**QMB3640**	Legacy QMB switch QMB3640 (obsolete)	—	obsolete

EDH-SQD-00321	QMB210T	Square D	other	OBSOLETE

Legacy QMB switch QMB210T (obsolete)

OEM part number	QMB210T	A	S140 oem_spec
Description	Legacy QMB fusible switch, Series 1-4	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	QM (31 in., 1961-Oct 1984) or QW (pre-1984): QMB323TD in outside poles; QW with flat bus may need QMB310LEX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00324	QMB2240	Square D	other	OBSOLETE

Legacy QMB switch QMB2240 (obsolete)

OEM part number	QMB2240	A	S137 oem_spec
Description	Legacy QMB fusible switch 2P 400 A, Series 1-4	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No direct switch; QMB3400LA 3P 400 A breaker unit (QMB interiors 1961-Oct 1984); QMB310EX for QW; QW1BL/QW3BL fillers obsolete	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00355	QMB303T	Square D	other	OBSOLETE

Legacy QMB switch QMB303T (obsolete)

OEM part number	QMB303T (Seen via search-engine summary of Schneider FAQ; direct page not retrieved)	C	S129 oem_spec
Description	Legacy QMB fusible switch	D	S129 inference
Status	obsolete	C	S129 oem_spec
Replacement / successor	QMB321T (+ QMB306LEX in QW interior 1961-Oct 1984); QMB321T cannot go in QM pre-1961 or current Series E1 interiors	C	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, ratings		

EDH-SQD-00356	QMB306T	Square D	other	OBSOLETE

Legacy QMB switch QMB306T (obsolete)

OEM part number	QMB306T (Seen via search-engine summary of Schneider FAQ; direct page not retrieved)	C	S129 oem_spec
Description	Legacy QMB fusible switch, Series 1	D	S129 inference
Status	obsolete	C	S129 oem_spec
Replacement / successor	QMB322TD in QMB interiors 1961-Oct 1984; QMB306LEX for QW with flat bus	C	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, ratings		

EDH-SQD-00320	QMB310T	Square D	other	OBSOLETE

Legacy QMB switch QMB310T (obsolete)

OEM part number	QMB310T	A	S132 oem_spec
Description	Legacy QMB fusible switch, Series 1-4	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No replacement if round bus bars; QM (31 in., 1961-Oct 1984) or QW (38 in., pre-1984): QMB323TD (use outside poles); QW flat bus may also need QMB310LEX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00337	QMB323TD	Square D	other	STATUS UNKNOWN

QMB replacement switch QMB323TD for legacy interiors

OEM part number	QMB323TD	A	S132 oem_spec
Description	Replacement switch for QMB310T/QMB210T on QM (31 in.) 1961-Oct 1984 or QW pre-1984 interiors; use outside poles	A	S132, S140, S123 oem_spec
Application	branch retrofit into legacy QMB interiors	A	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, ratings		
Open question	*Is QMB323TD a distinct current catalog number or shorthand for the W-suffix current unit (e.g. QMB362TW / QMB364W / QMB323TW)?*		

EDH-SQD-00323	QMB3240	Square D	other	OBSOLETE

Legacy QMB switch QMB3240 (obsolete)

OEM part number	QMB3240	A	S136 oem_spec
Description	Legacy QMB branch switch, occupied 12 in.	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No renewal parts; replace with QMB3400LA (7.5 in.) + QMB310EX + QW1BL and QW3BL fillers (obsolete; fabricate)	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00325	QMB3260	Square D	other	OBSOLETE

Legacy QMB switch QMB3260 (obsolete)

OEM part number	QMB3260	A	S135 oem_spec
Description	Legacy QMB fusible switch 600 A (pre-1984), occupied 15 in.	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	600 A fusible no longer available; if load allows 400 A breaker use QMB3400LA (7.5 in.) + QMB310EX; old-design fillers obsolete - fabricate locally	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00319	QMB3606T	Square D	other	OBSOLETE

Legacy QMB switch QMB3606T (obsolete)

OEM part number	QMB3606T	A	S134 oem_spec
Description	Legacy QMB fusible twin switch unit, 3P 600 V 60 A (Series 1-4 'Saflex')	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No replacement on QM interior (31 in.) built before 1961; QM 1961-1984: QMB362T; QW (38 in.) pre-1984: QMB362T + QMB306EX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		
Open question	*Surplus listings disagree on QMB3606T series (Series 2 vs Series 4)*		

EDH-SQD-00322	QMB3620	Square D	other	OBSOLETE

Legacy QMB switch QMB3620 (obsolete)

OEM part number	QMB3620	A	S133, S609 oem_spec
Alternate / superseded numbers	QMB364	A	S609 superseded_by; oem_spec
Description	Legacy QMB fusible switch (pre-1984 panelboards)	A	S133 oem_spec
	Obsolescent Series 1-4 three-pole branch switch unit, 200 A 600 Vac, 9 in; no longer available, number given only for cross-reference	A	S609 oem_spec
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	S133 oem_spec
Status	obsolete	A	same as above
	discontinued	A	S609 oem_spec
Replacement / successor	Pre-1961 interior: none; 1961-1984: QMB364; QW panelboard/switchboard also needs QMB-320-EX	A	S133 oem_spec
	Series D2 QMB364 (rail extension assemblies packed with every D2 switch)	A	S609 oem_spec
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00335	QMB362T	Square D	other	STATUS UNKNOWN

QMB replacement switch QMB362T for legacy interiors

OEM part number	QMB362T	A	S134 oem_spec
Description	Replacement QMB fusible switch named for QMB3606T (QM 1961-1984, or QW with QMB306EX)	A	same as above
Application	branch retrofit into legacy QMB interiors	A	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, ratings		
Open question	*Is QMB362T a distinct current catalog number or shorthand for the W-suffix current unit (e.g. QMB362TW / QMB364W / QMB323TW)?*		

EDH-SQD-00336	QMB364	Square D	other	STATUS UNKNOWN

QMB replacement switch QMB364 for legacy interiors

OEM part number	QMB364	A	S133 oem_spec
Description	Replacement switch named for QMB3620 (1961-1984; QW needs QMB-320-EX)	A	same as above
Application	branch retrofit into legacy QMB interiors	A	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, ratings		
Open question	*Is QMB364 a distinct current catalog number or shorthand for the W-suffix current unit (e.g. QMB362TW / QMB364W / QMB323TW)?*		

EDH-SQD-00354	QMB3640	Square D	other	OBSOLETE

Legacy QMB switch QMB3640 (obsolete)

OEM part number	QMB3640 (Seen via search-engine summary of Schneider FAQ; direct page not retrieved)	C	S129 oem_spec
Description	Legacy QMB fusible switch (3P 400 A implied by numbering - unverified)	D	S129 inference
Status	obsolete	C	S129 oem_spec
Replacement / successor	QM 1961-1984: QMB3400LA; QW: QMB3400LA + QMB310EX; QM pre-1961: none	C	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, ratings		

4.14 QED-2 — Power-Style QED-2 Switchboard

FAM-SQD-008 · switchboard · aka Power-Style QED-2, QED 2, QED-2 Series 2, QED-2/S, QED2 · markings: Schneider Electric, Square D

Free-standing UL 891 low-voltage switchboard, 91.5 in. high with base channels, front or front-and-rear accessible, NEMA 1 or 3R. Distribution is by group-mounted I-Line plug-on breaker sections (interiors up to 3000 A single-row / 2000 A double-row) or QMB/QMJ fusible switch sections, plus individually mounted PowerPact M/P/R, Masterpact NW or Bolt-Loc BP mains/feeders. Adding sections later requires the through-bus construction with splice-plate extensions; through bus sits at top, middle or bottom at 19.5, 27.5 or 36.0 in. from the front.

Attribute	Value	Cl.	Sources
Status	current (2700CT1101 v02 dated 2025-12 listed on se.com; OEM interiors catalog 2700CT1601 v1.3 2023-01) (Status inferred from current document listings; documents themselves not retrieved)	B	S119, S125 oem_spec
Era of manufacture	Catalog 2700CT1101 copyright 1995-2012; 'connect to existing' list names generations QED-2/S, QED-2 Series 2, QED-3, QED-4	A	S94 p. 1, p. 9; oem_spec
Voltage rating	600 Vac or 250 Vdc max	A	S94 p. 3; oem_spec
Main ampacity	Sections to 5000 A horizontal bus, 3000 A vertical bus; single mains to 5000 A; six subdivision mains to 4000 A; individually mounted feeders to 4000 A	A	same as above
Branch breakers accepted	Group-mounted I-Line: FA, FH, HD, HG, HJ, HL, QB, QD, QG, QJ, JD, JG, JJ, JL, LA, LH, LC, LI, FI, KI, MG, MJ, PG, PK, PJ, PL (and -C 100% variants), RG-C, RK-C, RJ-C, RL-C; group-mounted QMB/QMJ fusible switches 30-1200 A	A	S94 pp. 22, 29; oem_spec
Dimensions	Height 91.5 in. (2324 mm) with base channels; section widths 12, 24, 30, 36, 42, 48, 54 in.; frame depths 24, 36, 48, 54, 60 in.; NEMA 3R adds 11.50 in. front and 0.50 in. rear	A	S94 pp. 3, 24; oem_spec
I line interiors	Full-height I-Line distribution: 2000 A interiors (36/42/48 in. W; mounting space 54 or 72 in.) and 3000 A interior (54 in. W, L=72 in., R=40.5 in., min depth 36 in.)	A	S94 p. 23; oem_spec
I line section limits	Max I-Line interior 3000 A, single row only; double-row interiors 2000 A max; no 4000 A I-Line section (Schneider FAQ seen via search summary)	B	S119 oem_spec
Qmb sections	Group-mounted QMB switch sections: 36 in. W max switch 400 A; 42 in. W 1200 A; 48 in. W (2) 1200 A; interior 2000 A (36/42 in.) or 3000 A (48 in.); 42 in. main switch connector access space	A	S94 pp. 25, 29; oem_spec
Qmb mount height	QED-2 Series 2 eliminated the 72 in. QMB switch mounting height option; 63 in. is standard (Schneider FAQ via search summary)	B	S119 oem_spec
Through bus	Connect-to-existing data needed: factory order number, equipment type (QED-2/S, QED-2 Series 2, QED-3, QED-4, special), through-bus location top/middle/bottom, bus bar size 1.5 or 2.0 in. if <=2000 A, through-bus depth 19.5/27.5/36.0 in.	A	S94 p. 9; oem_spec
Splice	Stand-alone QED switchboards have no through-bus feature; only boards built with through-bus construction and splice-plate extensions can have sections added	A	S116 oem_spec
Bottom	All QED-2 switchboards (NEMA 1 or 3R) ship with bottom open; bottom closure plates are an order adder	A	S117 oem_spec

Attribute	Value	Cl.	Sources
OEM instruction document	80043-055-13 Section 4: indoor shipping sections joined with six 3/8-16 x 1 in bolts (provided) through existing holes in front and rear vertical corner channels; formed base channels with 0.75 in (19 mm) clearance holes in each corner (anchor hardware not furnished); through-bus splice connectors and hardware shipped with each shipping split, torqued per Section 9; on bus mounted front and rear of an insulating tube the U-shaped copper splice connector is centred on the tube with its slot pointing DOWN (Fig.14); ground bus splice with 1/4-20 thread-forming hardware (supplied) torqued to 100 lb-in (11 N-m) (read through ManualsLib text rendering)	B	S429 printed pp.17, 24-25 (viewer 19, 26-27); oem_spec
Torque values	Section 9 (printed p.51) Table 6 Incoming, branch and neutral lugs by socket size across flats: 1/4 in 180 lb-in (20 N-m); 5/16 in 250 lb-in (28 N-m); 3/8 in 340 lb-in (38 N-m); 1/2 in 450 lb-in (51 N-m); lugs so marked require 620 lb-in (70 N-m). Printed p.52 bus/hardware tables: 1/4 in 50-75 lb-in (6-8 N-m); 5/16 in 80-125 (9-14); 3/8 in 175-225 (20-25); 1/2 in 250-350 (28-40); one 1/2 in hardware row 720-840 lb-in (81-95 N-m); square-head (tee) bolt and (2) conical-washer tables by across-flats size (e.g. 0.87 in 250-280 lb-in; 1.00 in 130-150 lb-in; 1.25 in 450-550 lb-in; 0.90 in 145-160 lb-in) (Row-to-hardware pairing (carriage bolt / hex bolt / Keps nut / conical washer) not legible in text rendering; FAQ FA272134 points to pp.53-54 of 80043-055-12 for the same tables)	B	S429 printed pp.51-52 (viewer 53-54); oem_spec
Maintenance	Bus bar joints need no maintenance and must not be retightened after pre-energizing checkout; do not sand or remove plating on bus, splice bars or lugs (replace damaged parts); clean with Lectra-Clean (CRC); switch blade/jaw grease BG20 (Dow Corning) cat. SWLUB for Bolt-Loc, QMB, QMJ and QMQB (Canada only) switches; I-Line plug-on connections electric joint compound PJC7201; Masterpact drawout connections compound S48899 only	B	S429 printed p.41 (viewer 43); oem_spec

Breaker families associated: FA / FH (I-Line), H-frame HD/HG/HJ/HL/HR (I-Line), I-Limiter FI / KI / LI (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line), LA / LH (I-Line), LC (I-Line, 600 A), M-frame MG/MJ (I-Line), P-frame PG/PJ/PK/PL (I-Line), PowerPact L-frame LD/LG/LJ/LL/LR (I-Line), Q-frame QB/QD/QG/QJ (I-Line), QMB circuit breaker units (H-, J-, L-frame), R-frame RG/RJ/RK/RL (I-Line)

Key documents: S94 2700CT1101 Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switc; S116 FA121592 FAQ FA121592: Are Square D QED switchboards able to have additional (splice-to) sections i; S117 FA308905 FAQ FA308905: Do QED 2 switchboards NEMA 1 or 3R come with a solid bottom?; S119 FAQ000279508 / FAQ000257217 Square D QMB / QED-2 FAQ group (QED-2 Series 2 QMB mounting height 63 in.; QED-2 I-Line se; S125 2700CT1601 OEM QED-2 Switchboard I-Line Interiors, Single-Row and Double-Row OEM Interior Products Ca; S126 80043-055-16 Power-Style QED-2 Switchboards Instruction Bulletin; S429 80043-055-13 Power-Style QED-2 Switchboards Instruction Bulletin (English section, (c)1988-2018)

Also fits this family (entry printed elsewhere): HNM1BL, HNM4BL, HLW1BL, HLW4BL, HLN1BL, HLN4BL, HLW4EBL, HLN4EBL, HQO306, SL250, SL400, SL800M5, S33930, SL1200P5, SL1200P6, SL1200P7, QMB221TW, QMB221HW, QMB222TW, QMB222HW, QMB223TW, QMB223HW, QMB224W, QMB225W, QMB225WT3, QMB321TW, QMB321HW, QMB322TW, QMB322HW, QMB323TW, QMB323HW, QMB324W, QMB325W, QMB325WT3, QMB326W, QMB326WT3, QMB327WT3, QMB261TW, QMB261HW, QMB262TW, QMB262HW, QMB263TW, QMB263HW, QMB264W, QMB361TW, QMB361HW, QMB362TW, QMB362HW, QMB362T21W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMB364W, QMB365W, QMB365WT6, QMB366W, QMB367W, QMJ361T, QMJ362T, QMJ363T, QMJ363H, QMJ364T, QMJ364H, QMJ365, QMJ366, HRK30, QMB36R, QMB60R, QMB100R, HRK1020, QMB4060R, QMB600T6, QMB800T6, QMB300EK, QMB610EK, QMB200EK, 40251-016-51, 40256-034-50, 40251-018-50, 40256-014-50, 40251-162-50, 40560-270-50, 40251-287-50, 40256-039-50, VCEL030516H1, VCEL05012H1, VCEL07512H1, VCEL02114S1, VCELC02114S1, VCELC03038H1, VCELC05012H1, VCELC07512H1, VCEL06012H1, AL150HD, AL175JD, AL250JD, AL400LA, CU150HD, CU250JD, CU400LA, QMB1BLW, QMB3BLW, QMB6BLW, QMB15BLW, QMB1IMA_, QMB2IMA_, QMB3IMA_, QMB4IMA_, QMB8IMA_, 4052021450, 4052017302, 2330241601, 4052021650, 4020506501, 4028343750, 4025101851, 2342702001, 4052031850, 4052085601, 4052036750, 2142720241, 4052098601, 4028343550, 2342702400, 4028343250, 21593-20100, 21590-20241, 2152620361

Interior

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00519	**CF16KF63C**	OEM QED-2 I-Line interior CF16KF63C	—	unknown
EDH-SQD-00378	**CF16RJ63C36**	OEM QED-2 I-Line switchboard interior CF16RJ63C36	—	unknown
EDH-SQD-00374	**CF20R63C**	OEM QED-2 I-Line switchboard interior CF20R63C	—	unknown
EDH-SQD-00376	**CF20RJ63C**	OEM QED-2 I-Line switchboard interior CF20RJ63C	—	unknown
EDH-SQD-00375	**CF25R63C**	OEM QED-2 I-Line switchboard interior CF25R63C	—	unknown
EDH-SQD-00377	**CF30RJ63C**	OEM QED-2 I-Line switchboard interior CF30RJ63C	—	unknown

EDH-SQD-00519 **CF16KF63C** Square D / Schneider Electric interior **STATUS UNKNOWN**

OEM QED-2 I-Line interior CF16KF63C

OEM part number	CF16KF63C	A	S434 document page; oem_spec
Description	Schneider title: "1600A 63H DR I-LINE CENTER FEED COPPER BUS OEM QED2 INTERIOR" (63 in height, double row, centre feed, copper bus)	A	same as above
OEM instruction document	3D STEP model CF16KF63C117UMS-03 (cf16kf63c.stp, 10 Mar 2017); IB 80235-597-09 (OEM interiors) not retrieved	A	same as above
Cross-links	Families: QED-2		
Not yet documented	breaker spaces, Dimensions		

EDH-SQD-00378	CF16RJ63C36	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF16RJ63C36

OEM part number	CF16RJ63C36	C	S122 distributor
Description	1600 A double-row center-fed copper interior, 63 in. high, 48 in. W	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S122, S125 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S122 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00374	CF20R63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF20R63C

OEM part number	CF20R63C	C	S122 distributor
Description	2000 A single-row center-feed copper I-Line switchboard interior, 63 in.; listing as CF20R63C36: 36 in. W, 36 in. D, 1200 A left-side max frame	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S122, S125 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S122 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00376	CF20RJ63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF20RJ63C

OEM part number	CF20RJ63C	C	S122 distributor
Description	2000 A double-row copper I-Line interior, 63 in. high, 24 in. D, 48 in. W; right side to 250 A, left side to 1200 A frames	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S122, S125 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S122 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00375	CF25R63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF25R63C

OEM part number	CF25R63C	C	S122 distributor
Description	2500 A single-row copper I-Line switchboard interior, 63 in., 24 in. depth (Rexel: 'SWITCHBOARD INT CU I-LINE SR 2500A')	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S122, S125 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S122 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00377	CF30RJ63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF30RJ63C

OEM part number	CF30RJ63C	C	S122 distributor
Description	Listed by Rexel as 'Panelboard interior QED-2 I-Line 63 height 3000A copper bus center feed', 54 in. W, 24 in. D (double-row per listing - conflicts with OEM FAQ that 3000 A is single-row only)	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S122, S125 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S122 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00367	**8000602003**	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602003: Hinge frame leaf	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as
EDH-SQD-00368	**8023317701**	NEMA 3R QED-2/CMM/Speed-D door hinge part 8023317701: Hinge door leaf	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as

EDH-SQD-00367	8000602003	Square D	hardware-kit	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602003: Hinge frame leaf

OEM part number	8000602003	A	S114 oem_spec
Description	Hinge frame leaf; NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00368	8023317701	Square D	hardware-kit	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 8023317701: Hinge door leaf

OEM part number	8023317701	A	S114 oem_spec
Description	Hinge door leaf; NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00365	**21427-20401**	QED cover screw 21427-20401	—	unknown
EDH-SQD-00371	**2150720200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2150720200: Door leaf bolt (2 per set)	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as
EDH-SQD-00370	**2271020200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2271020200: Frame leaf bolt (2 per set)	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as
EDH-SQD-00372	**2300100200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2300100200: Nut	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as
EDH-SQD-00373	**2370100200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2370100200: Washer	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00369	**8000602001**	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602001: Hinge pin	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as

EDH-SQD-00365	**21427-20401**	Square D	fastener	STATUS UNKNOWN

QED cover screw 21427-20401

OEM part number	21427-20401 (OEM FAQ text seen only via search snippets)	**B**	S112 oem_spec
Description	1/4-20 x 1-1/4 in. self-tapping screw fastening cover plates to front of QED switchboard	**B**	same as above
Cross-links	Families: QED-2		
Not yet documented	Finish / plating, head style		

EDH-SQD-00371	**2150720200**	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2150720200: Door leaf bolt (2 per set)

OEM part number	2150720200	**A**	S114 oem_spec
Description	Door leaf bolt (2 per set); NEMA 3R door hinge set - 4 sets per N3R door	**A**	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	**A**	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	**A**	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00370	**2271020200**	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2271020200: Frame leaf bolt (2 per set)

OEM part number	2271020200	**A**	S114 oem_spec
Description	Frame leaf bolt (2 per set); NEMA 3R door hinge set - 4 sets per N3R door	**A**	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	**A**	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	**A**	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00372	**2300100200**	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2300100200: Nut

OEM part number	2300100200	**A**	S114 oem_spec
Description	Nut; NEMA 3R door hinge set - 4 sets per N3R door	**A**	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	**A**	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	**A**	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00373	**2370100200**	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2370100200: Washer

OEM part number	2370100200	**A**	S114 oem_spec
Description	Washer; NEMA 3R door hinge set - 4 sets per N3R door	**A**	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	**A**	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	**A**	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00369	8000602001	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602001: Hinge pin

OEM part number	8000602001	A	S114 oem_spec
Description	Hinge pin; NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00263	**QMB368W**	QMB fusible switch unit QMB368W (3P 600 Vac, 1200 A, 24 in.)	1200 A branch switch or group-mounted six-disconnect main with Class L A	unknown

EDH-SQD-00263	QMB368W	Square D	switch-unit	STATUS UNKNOWN

QMB fusible switch unit QMB368W (3P 600 Vac, 1200 A, 24 in.)

OEM part number	QMB368W	A	S138 oem_spec
Description	1200 A QMB fusible switch; 3-pole, 600 Vac max, 24 in. unit (distributor) (Ratings/height from distributor; existence/restriction from OEM FAQ)	B	S138, S123 oem_spec
Application	Restricted to QED-2 switchboards with 42 in. (qty 1) and 48 in. (qty 2) wide QMB distribution sections; cannot be installed in QMB panelboards	A	S138 oem_spec
Breaker compatibility	1200 A branch switch or group-mounted six-disconnect main with Class L fuses, 100 kA at 600 Vac; a single 1200 A main switch must be Bolt-Loc	A	S94 p. 29 note c; oem_spec
Kit contents	(4) #3/0-600 kcmil per phase	A	S94 p. 29; oem_spec
Dimensions	Mounting height 24 in. (610 mm) for 1200 A single switch in QED-2	A	same as above
Cross-links	Families: QED-2		
Not yet documented	horsepower ratings, renewal parts		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00366	**50552-108-01**	NEMA 3R QED-2 switchboard replacement door handle 50552-108-01	—	unknown
EDH-SQD-00364	**80031-024-02**	QED plug-button for unused holes 80031-024-02	—	unknown
EDH-SQD-00518	**S48899**	Square D maintenance compound S48899	—	unknown
EDH-SQD-00517	**SWLUB**	Square D maintenance compound SWLUB	—	unknown

EDH-SQD-00366	50552-108-01	Square D	other	STATUS UNKNOWN

NEMA 3R QED-2 switchboard replacement door handle 50552-108-01

OEM part number	50552-108-01	A	S113 oem_spec
Description	Replacement handle for outdoor (NEMA 3R) QED-2 switchboard	A	same as above
Cross-links	Families: QED-2		
Not yet documented	Dimensions, lockable		

EDH-SQD-00364	80031-024-02	Square D	other	STATUS UNKNOWN

QED plug-button for unused holes 80031-024-02

OEM part number	80031-024-02	A	S111 oem_spec
Description	Plug-button that seals/plugs unused holes in NEMA 1 and 3R QED-1 and QED-2 switchboards, including Speed-D	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	hole diameter, Material		

EDH-SQD-00518	S48899	Square D / Schneider Electric	other	STATUS UNKNOWN

Square D maintenance compound S48899

OEM part number	S48899	B	S429 printed p.41; oem_spec
Description	Electric joint compound for Masterpact drawout connections (only compound permitted there)	B	same as above
Cross-links	Families: QED-2		

EDH-SQD-00517	SWLUB	Square D / Schneider Electric	other	STATUS UNKNOWN

Square D maintenance compound SWLUB

OEM part number	SWLUB	B	S429 printed p.41; oem_spec
Description	BG20 High Performance Synthetic Grease (Dow Corning) for switch blade/jaw components rated 600 V and below (Bolt-Loc, QMB, QMJ, QMQB)	B	same as above
Cross-links	Families: QED-2		

4.15 SPEED-D — Speed-D Merchandised Service Section Switchboard

FAM-SQD-009 · switchboard · aka Speed D, SpeedD · markings: Square D

Merchandised (quick-ship) service-section switchboard family covered in the same catalog as QED-2 (Class 2741/2742). Speed-D boards with provisions for current-series QMB branch devices ship with (2) 15 in. QMB15BLW closing plates.

Attribute	Value	Cl.	Sources
Era of manufacture	In 2700CT1101 (2012)	A	S94 p. 47; oem_spec
Qmb fillers	Furnished with (2) 15 in. closing plates QMB15BLW; other closing plates QMB1BLW, QMB3BLW, QMB6BLW	A	S99 oem_spec

Key documents: S94 2700CT1101 Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switc; S99 FA225625 FAQ FA225625: Do the merchandised Speed-D switchboards with QMB branch devices come with b

Also fits this family (entry printed elsewhere): QMB221TW, QMB221HW, QMB222TW, QMB222HW, QMB223TW, QMB223HW, QMB224W, QMB225W, QMB225WT3, QMB321TW, QMB321HW, QMB322TW, QMB322HW, QMB323TW, QMB323HW, QMB324W, QMB325W, QMB325WT3, QMB326W, QMB326WT3, QMB327WT3, QMB261TW, QMB261HW, QMB262TW, QMB262HW, QMB263TW, QMB263HW, QMB264W, QMB361TW, QMB361HW, QMB362TW, QMB362HW, QMB362T21W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMB364W, QMB365W, QMB365WT6, QMB366W, QMB367W, QMB1BLW, QMB3BLW, QMB6BLW, QMB15BLW, 80031-024-02, 8000602003, 8023317701, 8000602001, 2271020200, 2150720200, 2300100200, 2370100200

4.16 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family QO (plug-on)

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00936	**PK2MB**	Square D QO back-fed main breaker retaining kit PK2MB	QO (plug-on) breakers used as back-fed mains in QO load centers A	unknown
EDH-SQD-00937	**PK3MB**	Square D QO back-fed main breaker retaining kit PK3MB	QO (plug-on) breakers used as back-fed mains in QO load centers A	unknown
EDH-SQD-00940	**PK4MB2HA**	Square D QO back-fed main breaker retaining kit PK4MB2HA	QO (plug-on) breakers used as back-fed mains in QO load centers A	unknown
EDH-SQD-00939	**PK4MB2LA**	Square D QO back-fed main breaker retaining kit PK4MB2LA	QO (plug-on) breakers used as back-fed mains in QO load centers A	unknown
EDH-SQD-00938	**PK5RK**	Square D QO back-fed main breaker retaining kit PK5RK	QO (plug-on) breakers used as back-fed mains in QO load centers A	unknown

EDH-SQD-00936	PK2MB	Square D	hardware-kit	STATUS UNKNOWN

Square D QO back-fed main breaker retaining kit PK2MB

OEM part number	PK2MB	A	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Description	Retaining kit: secures circuit breaker to interior when used as a back-fed main. For QO612L100F/S, RB, QO612L100DF/S, QO816L100F/S, RB, QO816L100DF/S and QO148L125GF/S, GRB load centers.	A	same as above
Application	main	A	same as above
Installation location	QO load center interior, at the back-fed main breaker position	C	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; inference
Breaker compatibility	QO (plug-on) breakers used as back-fed mains in QO load centers	A	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Cross-links	Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		
Open question	*Load-center accessory: confirm whether any of these are listed for NQ/NQOD panelboards (NQ catalog states back-fed QOB mains in NQ are factory installed).*		

EDH-SQD-00937	PK3MB	Square D	hardware-kit	STATUS UNKNOWN

Square D QO back-fed main breaker retaining kit PK3MB

OEM part number	PK3MB	A	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Description	Retaining kit: secures 3P circuit breaker without accessories to left side of interior when used as a back-fed main. For 3-phase load centers.	A	same as above
Application	main	A	same as above
Installation location	QO load center interior, at the back-fed main breaker position	C	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; inference
Breaker compatibility	QO (plug-on) breakers used as back-fed mains in QO load centers	A	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Cross-links	Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		
Open question	*Load-center accessory: confirm whether any of these are listed for NQ/NQOD panelboards (NQ catalog states back-fed QOB mains in NQ are factory installed).*		

EDH-SQD-00940	PK4MB2HA	Square D	hardware-kit	STATUS UNKNOWN

Square D QO back-fed main breaker retaining kit PK4MB2HA

OEM part number	PK4MB2HA	**A**	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Description	Retaining kit: secures ONE circuit breaker with or without electrical accessories to right side of interior when used as a back-fed main; 1-phase 150-225 A convertible main load centers, Series S01 and S02.	**A**	same as above
Application	main	**A**	same as above
Installation location	QO load center interior, at the back-fed main breaker position	**C**	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; inference
Breaker compatibility	QO (plug-on) breakers used as back-fed mains in QO load centers	**A**	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Cross-links	Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		
Open question	*Load-center accessory: confirm whether any of these are listed for NQ/NQOD panelboards (NQ catalog states back-fed QOB mains in NQ are factory installed).*		

EDH-SQD-00939	PK4MB2LA	Square D	hardware-kit	STATUS UNKNOWN

Square D QO back-fed main breaker retaining kit PK4MB2LA

OEM part number	PK4MB2LA	**A**	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Description	Retaining kit: secures ONE circuit breaker with or without electrical accessories to right side of interior when used as a back-fed main; 1-phase 100-125 A convertible main load centers, Series S01 and S02.	**A**	same as above
Application	main	**A**	same as above
Installation location	QO load center interior, at the back-fed main breaker position	**C**	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; inference
Breaker compatibility	QO (plug-on) breakers used as back-fed mains in QO load centers	**A**	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Cross-links	Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		
Open question	*Load-center accessory: confirm whether any of these are listed for NQ/NQOD panelboards (NQ catalog states back-fed QOB mains in NQ are factory installed).*		

EDH-SQD-00938	PK5RK	Square D	hardware-kit	STATUS UNKNOWN

Square D QO back-fed main breaker retaining kit PK5RK

OEM part number	PK5RK	A	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Description	Retaining kit: secures circuit breaker to interior when used as a back-fed main for 2P QO 150-200 A circuit breakers.	A	same as above
Application	main	A	same as above
Installation location	QO load center interior, at the back-fed main breaker position	C	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; inference
Breaker compatibility	QO (plug-on) breakers used as back-fed mains in QO load centers	A	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Cross-links	Breakers: QO (plug-on), QOB (bolt-on), Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Material, Status		
Open question	*Load-center accessory: confirm whether any of these are listed for NQ/NQOD panelboards (NQ catalog states back-fed QOB mains in NQ are factory installed).*		

Breaker family Square D FA/FH/FC/FI (F-frame 100/150 A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00452	**AL100FA**	Square D FA mechanical lug kit (Al lugs) - FA	FA, FH, FI 35-100 A standard; 15-30 A optional A	Still listed in 2016 Digest Table 3.70
EDH-SQD-00451	**AL100FA4**	Square D FA mechanical lug kit (Al lugs) - FC	FC 35-100 A standard; FC 15-30 A optional A	Still listed in 2016 Digest Table 3.70
EDH-SQD-00453	**AL100TF**	Square D FA mechanical lug kit (Al lugs) - FA	FA, FH, FC 15-100 A optional; OFF end only when OFF end is load end A	Still listed in 2016 Digest Table 3.70
EDH-SQD-00454	**AL150FA**	Square D FA mechanical lug kit (Al lugs) - FA	FA (only) 150 A optional A	Still listed in 2016 Digest Table 3.70
EDH-SQD-00450	**AL50FA**	Square D FA mechanical lug kit (Al lugs) - FA	FA, FH, FI 15-30 A standard; 35-100 A optional A	Still listed in 2016 Digest Table 3.70
EDH-SQD-00462	**CU100FA**	Square D FA mechanical lug kit (Cu lugs) - FA	FA, FH, FC, FI 15-100 A optional A	Still listed in 2016 Digest Table 3.70
EDH-SQD-00463	**CU100TF**	Square D FA mechanical lug kit (Cu lugs) - FA	FA, FH, FC 15-100 A optional; OFF end only when OFF end is load end A	Still listed in 2016 Digest Table 3.70
EDH-SQD-00461	**CU30FA4**	Square D FA mechanical lug kit (Cu lugs) - FC	FC 15-30 A standard A	Still listed in 2016 Digest Table 3.70
EDH-SQD-00482	**CVC100FA**	Square D FA Cu compression lug kit	FA, FH, FC, FI A	unknown
EDH-SQD-00488	**PDC3FA2**	Square D FA power distribution connector (multi-wire load lug)	FAL, FHL, FCL 15-100 A (OFF end only when OFF is load end) A	unknown
EDH-SQD-00487	**PDC6FA6**	Square D FA power distribution connector (multi-wire load lug)	FAL, FHL, FCL 15-100 A (OFF end only when OFF is load end) A	unknown
EDH-SQD-00472	**VC100FA**	Square D FA Al compression lug kit	FA, FH, FC, FI A	unknown

EDH-SQD-00452	AL100FA	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FA

OEM part number	AL100FA	A	S182 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FI 35-100 A standard; 15-30 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 14-1/0 AWG Cu or (1) 12-1/0 AWG Al	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S183 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Digest Plus web table (search snippet) gives 12-1/0 AWG Al; another edition shows 12-1 AWG - confirm per edition.*		

EDH-SQD-00451	AL100FA4	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FC

OEM part number	AL100FA4	A	S182 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FC 35-100 A standard; FC 15-30 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 14-3 AWG Cu or (1) 12-1 AWG Al	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S183 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00453	AL100TF	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FA

OEM part number	AL100TF	A	S182 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC 15-100 A optional; OFF end only when OFF end is load end	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 12-3 AWG Cu	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S183 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00454	AL150FA	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FA

OEM part number	AL150FA	A	S182 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA (only) 150 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 2-3/0 AWG	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S183 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00450	AL50FA	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FA

OEM part number	AL50FA	A	S182 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FI 15-30 A standard; 35-100 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 14-4 AWG Cu or (1) 12-4 AWG Al	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S183 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00462	CU100FA	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Cu lugs) - FA

OEM part number	CU100FA	A	S182 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC, FI 15-100 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 14-1 AWG Cu	A	same as above
Material	copper lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S183 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00463	CU100TF	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Cu lugs) - FA

OEM part number	CU100TF	A	S182 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC 15-100 A optional; OFF end only when OFF end is load end	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 12-3 AWG Cu	A	same as above
Material	copper lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S183 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00461	CU30FA4	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Cu lugs) - FC

OEM part number	CU30FA4	A	S182 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FC 15-30 A standard	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 14-10 AWG Cu	A	same as above
Material	copper lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S183 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00482	CVC100FA	Square D	lug-kit	STATUS UNKNOWN

Square D FA Cu compression lug kit

OEM part number	CVC100FA	A	S182 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC, FI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	6-1/0 AWG Cu	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.4 in	A	same as above
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00488	PDC3FA2	Square D	lug-kit	STATUS UNKNOWN

Square D FA power distribution connector (multi-wire load lug)

OEM part number	PDC3FA2	A	S182 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	FAL, FHL, FCL 15-100 A (OFF end only when OFF is load end)	A	same as above
Kit contents	3 per kit	A	same as above
Wire range	(3) 14-2 AWG Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 1.2 in	A	same as above
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00487	PDC6FA6	Square D	lug-kit	STATUS UNKNOWN

Square D FA power distribution connector (multi-wire load lug)

OEM part number	PDC6FA6	A	S182 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	FAL, FHL, FCL 15-100 A (OFF end only when OFF is load end)	A	same as above
Kit contents	3 per kit	A	same as above
Wire range	(6) 14-6 AWG Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 1.0 in	A	same as above
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00472	VC100FA	Square D	lug-kit	STATUS UNKNOWN

Square D FA Al compression lug kit

OEM part number	VC100FA	A	S182 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC, FI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	8-1/0 AWG	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.3 in	A	same as above
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00494	**FAT**	Square D control wire terminal / tapped lug (FA)	FA, FH, FI **A**	unknown

EDH-SQD-00494	FAT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (FA)

OEM part number	FAT	A	S182 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041; use fully insulated 0.250 in slip-on connectors	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FI	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D KA/KH/KC/KI (K-frame 250 A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00455	**AL250KA**	Square D KA mechanical lug kit (Al lugs) - KI	KI 110-175 A standard (2012 table); distributors also list KA, KH, KC A	unknown
EDH-SQD-00456	**AL250KI**	Square D KA mechanical lug kit (Al lugs) - KI	KI 200-250 A standard; KI 110-175 A optional A	unknown
EDH-SQD-00464	**CU250KA**	Square D KA mechanical lug kit (Cu lugs) - KI	KI 110-250 A optional A	unknown
EDH-SQD-00483	**CVC250KA3**	Square D KA Cu compression lug kit	KI A	unknown
EDH-SQD-00473	**VC250KA3**	Square D KA Al compression lug kit	KI A	unknown
EDH-SQD-00474	**VC250KA35**	Square D KA Al compression lug kit	KI A	unknown

EDH-SQD-00455	AL250KA	Square D	lug-kit	STATUS UNKNOWN

Square D KA mechanical lug kit (Al lugs) - KI

OEM part number	AL250KA	A	S182 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	KI 110-175 A standard (2012 table); distributors also list KA, KH, KC	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 4 AWG-350 kcmil	A	same as above
Material	aluminum lug body	A	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*AL250KA: OEM 2012 Digest lists only KI application; confirm KA/KH/KC applicability from KA-era Digest or instruction bulletin.*		

EDH-SQD-00456	AL250KI	Square D	lug-kit	STATUS UNKNOWN

Square D KA mechanical lug kit (Al lugs) - KI

OEM part number	AL250KI	A	S182 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	KI 200-250 A standard; KI 110-175 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 1/0 AWG-350 kcmil	A	same as above
Material	aluminum lug body	A	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00464	CU250KA	Square D	lug-kit	STATUS UNKNOWN

Square D KA mechanical lug kit (Cu lugs) - KI

OEM part number	CU250KA	A	S182 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	KI 110-250 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 4 AWG-250 kcmil Cu	A	same as above
Material	copper lug body	A	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00483	CVC250KA3	Square D	lug-kit	STATUS UNKNOWN

Square D KA Cu compression lug kit

OEM part number	CVC250KA3	A	S182 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	KI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	2/0 AWG-300 kcmil Cu	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.5 in	A	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00473	VC250KA3	Square D	lug-kit	STATUS UNKNOWN

Square D KA Al compression lug kit

OEM part number	VC250KA3	A	S182 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	KI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	4 AWG-300 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.5 in	A	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00474	VC250KA35	Square D	lug-kit	STATUS UNKNOWN

Square D KA Al compression lug kit

OEM part number	VC250KA35	**A**	S182 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	KI	**A**	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	**A**	same as above
Wire range	250-350 kcmil	**A**	same as above
Material	aluminum compression lug	**A**	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.5 in	**A**	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00495	**AL250KIT**	Square D control wire terminal / tapped lug (KI)	KI **A**	unknown

EDH-SQD-00495	AL250KIT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (KI)

OEM part number	AL250KIT	**A**	S182 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	KI	**A**	same as above
Kit contents	1 per standard package	**A**	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Digest 2016 shows 'AL250KAT' in the control-wire illustration while 2012 table lists AL250KIT for KI - verify which number is current for KA/KI.*		

Breaker family Square D LA/LH (L-frame 400 A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00457	**AL400LH7**	Square D LA mechanical lug kit (Al lugs) - Q4	Q4, LA, LH 125-400 A optional **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00484	**CVC400LA3**	Square D LA Cu compression lug kit	LA, LH, Q4 **A**	unknown
EDH-SQD-00485	**CVC400LA5**	Square D LA Cu compression lug kit	LA, LH, Q4 **A**	unknown
EDH-SQD-00490	**PDC12LA4**	Square D LA power distribution connector (multi-wire load lug)	LAL, LHL, Q4L 125-400 A **A**	unknown
EDH-SQD-00491	**PDC4LA250**	Square D LA power distribution connector (multi-wire load lug)	LAL, LHL, Q4L 125-400 A **A**	unknown
EDH-SQD-00489	**PDC6LA20**	Square D LA power distribution connector (multi-wire load lug)	LAL, LHL, Q4L 125-400 A **A**	unknown
EDH-SQD-00476	**VC400LA3**	Square D LA Al compression lug kit	LA, LH, Q4 **A**	unknown
EDH-SQD-00475	**VC400LA35**	Square D LA Al compression lug kit	LA, LH, Q4 **A**	unknown
EDH-SQD-00477	**VC400LA5**	Square D LA Al compression lug kit	LA, LH, Q4 **A**	unknown
EDH-SQD-00478	**VC400LA7**	Square D LA Al compression lug kit	LA, LH, Q4 **A**	unknown

EDH-SQD-00457	AL400LH7	Square D	lug-kit	STILL LISTED IN 2016 D

Square D LA mechanical lug kit (Al lugs) - Q4

OEM part number	AL400LH7	A	S182 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Q4, LA, LH 125-400 A optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(1) 350-750 kcmil	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S183 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00484	CVC400LA3	Square D	lug-kit	STATUS UNKNOWN

Square D LA Cu compression lug kit

OEM part number	CVC400LA3	A	S182 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Wire range	2/0 AWG-300 kcmil Cu	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.3 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00485	CVC400LA5	Square D	lug-kit	STATUS UNKNOWN

Square D LA Cu compression lug kit

OEM part number	CVC400LA5	A	S182 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	1 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	250-500 kcmil Cu	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 2.3 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00490	PDC12LA4	Square D	lug-kit	STATUS UNKNOWN

Square D LA power distribution connector (multi-wire load lug)

OEM part number	PDC12LA4	A	S182 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	LAL, LHL, Q4L 125-400 A	A	same as above
Kit contents	1 per kit	A	same as above
Wire range	(12) 14-4 AWG Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 1.25 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00491	PDC4LA250	Square D	lug-kit	STATUS UNKNOWN

Square D LA power distribution connector (multi-wire load lug)

OEM part number	PDC4LA250	A	S182 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	LAL, LHL, Q4L 125-400 A	A	same as above
Kit contents	1 per kit	A	same as above
Wire range	(3) 14-2 AWG + (1) 2 AWG-250 kcmil Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 2.0 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00489	PDC6LA20	Square D	lug-kit	STATUS UNKNOWN

Square D LA power distribution connector (multi-wire load lug)

OEM part number	PDC6LA20	A	S182 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	LAL, LHL, Q4L 125-400 A	A	same as above
Kit contents	1 per kit	A	same as above
Wire range	(6) 12-2/0 AWG Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 2.25 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00476	VC400LA3	Square D	lug-kit	STATUS UNKNOWN

Square D LA Al compression lug kit

OEM part number	VC400LA3	A	S182 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Wire range	4 AWG-300 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.0 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00475	VC400LA35	Square D	lug-kit	STATUS UNKNOWN

Square D LA Al compression lug kit

OEM part number	VC400LA35	A	S182 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Wire range	250-350 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.25 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00477	VC400LA5	Square D	lug-kit	STATUS UNKNOWN

Square D LA Al compression lug kit

OEM part number	VC400LA5	A	S182 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	1 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	2/0 AWG-500 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 2.2 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00478	VC400LA7	Square D	lug-kit	STATUS UNKNOWN

Square D LA Al compression lug kit

OEM part number	VC400LA7	A	S182 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	1 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	500-750 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 2.5 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00496	**AL400LAT**	Square D control wire terminal / tapped lug (Q4)	Q4, LA, LH A	unknown

EDH-SQD-00496	AL400LAT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (Q4)

OEM part number	AL400LAT	A	S182 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Q4, LA, LH	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D LC/LI/LE/LX/LXI (L-frame 600 A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00458	**AL600LI35**	Square D LI mechanical lug kit (Al lugs) - LE	LE, LX, LXI 100-250 A standard; LC, LI, LE, LX, LXI 300-600 A optional A	unknown
EDH-SQD-00459	**AL600LI5**	Square D LI mechanical lug kit (Al lugs) - LI	LI, LE, LX, LXI 300-600 A standard; LE, LX, LXI 100-250 A optional A	unknown
EDH-SQD-00460	**AL600LI7**	Square D LI mechanical lug kit (Al lugs) - LC	LC, LI, LE, LX, LXI optional A	unknown
EDH-SQD-00465	**CU600LI35**	Square D LI mechanical lug kit (Cu lugs) - LI	LI, LE, LX, LXI optional A	unknown
EDH-SQD-00466	**CU600LI5**	Square D LI mechanical lug kit (Cu lugs) - LI	LI, LE, LX, LXI optional A	unknown
EDH-SQD-00467	**CU600LI7**	Square D LI mechanical lug kit (Cu lugs) - LI	LI, LE, LX, LXI optional A	unknown
EDH-SQD-00486	**CVC600LI5**	Square D LI Cu compression lug kit	LI, LE, LX, LXI (not I-Line) A	unknown
EDH-SQD-00479	**VC600LI3**	Square D LI Al compression lug kit	LI, LE, LX, LXI (not I-Line) A	unknown
EDH-SQD-00480	**VC600LI5**	Square D LI Al compression lug kit	LI, LE, LX, LXI (not I-Line) A	unknown
EDH-SQD-00481	**VC600LI7**	Square D LI Al compression lug kit	LI, LE, LX, LXI (not I-Line) A	unknown

EDH-SQD-00458	AL600LI35	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Al lugs) - LE

OEM part number	AL600LI35	A	S182 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LE, LX, LXI 100-250 A standard; LC, LI, LE, LX, LXI 300-600 A optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(2) 1 AWG-350 kcmil	A	same as above
Material	aluminum lug body	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00459	AL600LI5	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Al lugs) - LI

OEM part number	AL600LI5	A	S182 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI 300-600 A standard; LE, LX, LXI 100-250 A optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(2) 4/0 AWG-500 kcmil	A	same as above
Material	aluminum lug body	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00460	AL600LI7	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Al lugs) - LC

OEM part number	AL600LI7	A	S182 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LC, LI, LE, LX, LXI optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(1) 500-750 kcmil	A	same as above
Material	aluminum lug body	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00465	CU600LI35	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Cu lugs) - LI

OEM part number	CU600LI35	A	S182 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(2) 1 AWG-350 kcmil Cu	A	same as above
Material	copper lug body	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00466	CU600LI5	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Cu lugs) - LI

OEM part number	CU600LI5	A	S182 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(2) 4/0 AWG-500 kcmil Cu	A	same as above
Material	copper lug body	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00467	CU600LI7	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Cu lugs) - LI

OEM part number	CU600LI7	A	S182 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(1) 500-750 kcmil Cu	A	same as above
Material	copper lug body	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00486	CVC600LI5	Square D	lug-kit	STATUS UNKNOWN

Square D LI Cu compression lug kit

OEM part number	CVC600LI5	A	S182 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools); cannot be used on I-Line breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI (not I-Line)	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Wire range	250-500 kcmil Cu	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 3.20 in	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00479	VC600LI3	Square D	lug-kit	STATUS UNKNOWN

Square D LI Al compression lug kit

OEM part number	VC600LI3	A	S182 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools); cannot be used on I-Line breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI (not I-Line)	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Wire range	4 AWG-300 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.05 in	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00480	VC600LI5	Square D	lug-kit	STATUS UNKNOWN

Square D LI Al compression lug kit

OEM part number	VC600LI5	A	S182 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools); cannot be used on I-Line breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI (not I-Line)	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Wire range	2/0 AWG-500 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 3.20 in	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00481	VC600LI7	Square D	lug-kit	STATUS UNKNOWN

Square D LI Al compression lug kit

OEM part number	VC600LI7	A	S182 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools); cannot be used on I-Line breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI (not I-Line)	A	same as above
Kit contents	1 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	500-750 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 3.45 in	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00510	**AL600IN**	Square D LC/LI/LE/LX/LXI threaded terminal clip kit	LC, LI, LE, LX, LXI A	unknown
EDH-SQD-00497	**AL600LI35T**	Square D control wire terminal / tapped lug (LC)	LC, LI, LXI, LX, LE A	unknown
EDH-SQD-00498	**AL600LI5T**	Square D control wire terminal / tapped lug (LC)	LC, LI, LXI, LX, LE A	unknown

EDH-SQD-00510	AL600IN	Square D	breaker-accessory	STATUS UNKNOWN

Square D LC/LI/LE/LX/LXI threaded terminal clip kit

OEM part number	AL600IN	A	S182 p.3-20, Table 3.71; oem_spec
Description	Threaded terminal clip kit; snaps onto bottom of terminal to allow bolted connection when the standard lug is removed (P-MT configuration)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LC, LI, LE, LX, LXI	A	same as above
Kit contents	3 clips per kit	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00497	AL600LI35T	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (LC)

OEM part number	AL600LI35T	A	S182 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LC, LI, LXI, LX, LE	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00498	AL600LI5T	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (LC)

OEM part number	AL600LI5T	A	S182 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LC, LI, LXI, LX, LE	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D MA/MH/MX/ME (M-frame 1000 A)

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00500	**AL1000MAT**	Square D control wire terminal / tapped lug (MA)	MA, MH, MX, ME A	unknown
EDH-SQD-00499	**AL900MAT**	Square D control wire terminal / tapped lug (MA)	MA, MH, MX, ME A	unknown

EDH-SQD-00500	AL1000MAT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (MA)

OEM part number	AL1000MAT	A	S182 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MA, MH, MX, ME	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D MA/MH/MX/ME (M-frame 1000 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00499	AL900MAT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (MA)

OEM part number	AL900MAT	A	S182 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MA, MH, MX, ME	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D MA/MH/MX/ME (M-frame 1000 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D NA/NC/NX/NE (N-frame 1200 A)

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00501	**AL1200NE6T**	Square D control wire terminal / tapped lug (NA)	NA, NC, NX, NE A	unknown

EDH-SQD-00501	AL1200NE6T	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (NA)

OEM part number	AL1200NE6T	A	S182 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NA, NC, NX, NE	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D NA/NC/NX/NE (N-frame 1200 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact D-Frame (DG/DJ/DL)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00468	**32508**	PowerPact D-frame 400 A field-installable lug kit (with terminal cover)	D-frame 3P 400 A A	unknown
EDH-SQD-00469	**32510**	PowerPact D-frame 600 A field-installable lug kit (with terminal cover)	D-frame 3P 600 A A	unknown
EDH-SQD-00493	**PDC12DG4**	PowerPact D-frame power distribution connector	DG, DJ, DL 150-600 A A	unknown
EDH-SQD-00492	**PDC5DG20**	PowerPact D-frame power distribution connector	DG, DJ, DL 150-600 A A	unknown

EDH-SQD-00468	32508	Square D	lug-kit	STATUS UNKNOWN

PowerPact D-frame 400 A field-installable lug kit (with terminal cover)

OEM part number	32508	A	S182 p.3-28, Table 3.89; oem_spec
Alternate / superseded numbers	S32508 (Printed without S prefix)	D	S182 alias; p.3-28; inference
Description	Field-installable lug kit, terminal cover included, 400 A	A	S182 p.3-28, Table 3.89; oem_spec
Application	accessory	A	same as above
Breaker compatibility	D-frame 3P 400 A	A	same as above
Poles	3	A	same as above
Kit contents	kit for 3 poles incl. terminal cover	A	same as above
Wire range	(1) 2 AWG-600 kcmil stranded Cu or (1) 2 AWG-500 kcmil stranded Al	A	same as above
Material	not stated	A	same as above
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Requires	29348 (EDH-SQD-00383)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00469	32510	Square D	lug-kit	STATUS UNKNOWN

PowerPact D-frame 600 A field-installable lug kit (with terminal cover)

OEM part number	32510	A	S182 p.3-28, Table 3.89; oem_spec
Alternate / superseded numbers	S32510 (Printed without S prefix)	D	S182 alias; p.3-28; inference
Description	Field-installable lug kit, terminal cover included, 600 A	A	S182 p.3-28, Table 3.89; oem_spec
Application	accessory	A	same as above
Breaker compatibility	D-frame 3P 600 A	A	same as above
Poles	3	A	same as above
Kit contents	kit for 3 poles incl. terminal cover	A	same as above
Wire range	(2) 2/0 AWG-350 kcmil stranded Cu or (2) 2/0 AWG-500 kcmil stranded Al	A	same as above
Material	not stated	A	same as above
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00493	PDC12DG4	Square D	lug-kit	STATUS UNKNOWN

PowerPact D-frame power distribution connector

OEM part number	PDC12DG4	A	S182 p.3-29, Table 3.93; oem_spec
Description	Power distribution connector for D-frame; kit includes long terminal shield (adds 1.65 in vs standard lug with short shield)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	DG, DJ, DL 150-600 A	A	same as above
Kit contents	3 per kit	A	same as above
Wire range	(12) 14-4 AWG	A	same as above
Material	not stated	A	same as above
Dimensions	Dimension A 1.28-1.31 in	A	same as above
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00492	PDC5DG20	Square D	lug-kit	STATUS UNKNOWN

PowerPact D-frame power distribution connector

OEM part number	PDC5DG20	A	S182 p.3-29, Table 3.93; oem_spec
Description	Power distribution connector for D-frame; kit includes long terminal shield (adds 1.65 in vs standard lug with short shield)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	DG, DJ, DL 150-600 A	A	same as above
Kit contents	3 per kit	A	same as above
Wire range	(3) 14-2 AWG and (2) 14-2/0 AWG	A	same as above
Material	not stated	A	same as above
Dimensions	Dimension A 1.28-1.31 in	A	same as above
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00470	**36965**	PowerPact D-frame terminal shield 3P	D-frame (3P) A	unknown

EDH-SQD-00470	36965	Square D	barrier	STATUS UNKNOWN

PowerPact D-frame terminal shield 3P

OEM part number	36965	A	S182 p.3-28, Table 3.90; oem_spec
Description	Terminal shield for D-frame 3P	A	same as above
Application	accessory	A	same as above
Breaker compatibility	D-frame (3P)	A	same as above
Kit contents	1 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00408	**CYA060HD**	PowerPact H-frame Cu compression lug kit	PowerPact H-frame A	unknown
EDH-SQD-00409	**CYA150HD**	PowerPact H-frame Cu compression lug kit	PowerPact H-frame A	unknown
EDH-SQD-00390	**PDC3HD2**	PowerPact H-Frame power distribution connector (multi-wire load lug)	PowerPact H-Frame A	unknown
EDH-SQD-00389	**PDC6HD6**	PowerPact H-Frame power distribution connector (multi-wire load lug)	PowerPact H-Frame A	unknown
EDH-SQD-00395	**YA060HD**	PowerPact H-frame Al/Cu compression lug kit	PowerPact H-frame A	unknown
EDH-SQD-00396	**YA150HD**	PowerPact H-frame Al/Cu compression lug kit	PowerPact H-frame A	unknown

EDH-SQD-00408	CYA060HD	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-frame Cu compression lug kit

OEM part number	CYA060HD	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Current rating	<=60 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	6-1/0 AWG Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37449 (EDH-SQD-00448)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00409	CYA150HD	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-frame Cu compression lug kit

OEM part number	CYA150HD	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Current rating	<=150 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	4-2/0 AWG Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37449 (EDH-SQD-00448)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00390	PDC3HD2	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC3HD2	A	S180 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact H-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Wire range	(3) 2 AWG or 14-3 AWG Cu	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00389	PDC6HD6	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC6HD6	A	S180 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact H-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Wire range	(6) 8-6 AWG or 14-10 AWG Cu per terminal; 1 terminal per kit... (6 wires)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00395	YA060HD	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-frame Al/Cu compression lug kit

OEM part number	YA060HD	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Current rating	<=60 A Al/Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	6-2 AWG Cu or Al; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37449 (EDH-SQD-00448)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00396	YA150HD	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-frame Al/Cu compression lug kit

OEM part number	YA150HD	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Current rating	<=150 A (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	1/0-4/0 AWG Cu or Al; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37449 (EDH-SQD-00448)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00431	**S37432**	PowerPact H-frame mixed rear connection kit	PowerPact H-frame **A**	unknown
EDH-SQD-00434	**S37436**	PowerPact H-frame short terminal cover 3p	PowerPact H-frame **A**	unknown
EDH-SQD-00445	**S37446**	PowerPact H-frame 60 A short lug shield	PowerPact H-frame **A**	unknown
EDH-SQD-00446	**S37447**	PowerPact H-frame 150 A short lug shield	PowerPact H-frame **A**	unknown
EDH-SQD-00448	**S37449**	PowerPact H-frame long lug shield	PowerPact H-frame **A**	unknown

EDH-SQD-00431	S37432	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame mixed rear connection kit

OEM part number	S37432	A	S180 p.123, Table 118; oem_spec
Description	Mixed rear connection kit, H-frame 3P (4 short + 2 long rear connections, hardware, 2 terminal covers)	A	same as above
Application	accessory	A	same as above
Installation location	over breaker terminals	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Kit contents	Mixed rear connection kit, H-frame 3P (4 short + 2 long rear connections, hardware, 2 terminal covers)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00434	S37436	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame short terminal cover 3p

OEM part number	S37436	A	S180 p.123, Table 118; oem_spec
Description	Short terminal cover 3P, H-frame	A	same as above
Application	accessory	A	same as above
Installation location	over breaker terminals	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Kit contents	Short terminal cover 3P, H-frame	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00445	S37446	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame 60 A short lug shield

OEM part number	S37446	A	S180 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: H-frame 60 A short lug shield (mechanical lugs); extension 'B' past end of breaker 0.50 in; max wire size 3 AWG	A	same as above
Application	accessory	A	same as above
Installation location	over line/load terminals	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Kit contents	1 per kit	A	same as above
Dimensions	dimension B (extension past breaker end) = 0.50 in	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00446	S37447	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame 150 A short lug shield

OEM part number	S37447	A	S180 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: H-frame 150 A short lug shield (mechanical lugs); extension 'B' past end of breaker 0.50 in; max wire size 3/0 AWG	A	same as above
Application	accessory	A	same as above
Installation location	over line/load terminals	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Kit contents	1 per kit	A	same as above
Dimensions	dimension B (extension past breaker end) = 0.50 in	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00448	S37449	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame long lug shield

OEM part number	S37449	A	S180 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: H-frame long lug shield (PDC and compression lugs: PDC6HD6, PDC3HD2, YA060HD, YA150HD, CYA060HD, CYA150HD); extension 'B' past end of breaker 2.24 in	A	same as above
Application	accessory	A	same as above
Installation location	over line/load terminals	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Kit contents	1 per kit	A	same as above
Dimensions	dimension B (extension past breaker end) = 2.24 in	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00379	**S37423**	PowerPact H-frame control wire terminal for mechanical lugs	H-frame lugs (HD/HG/HJ/HL or JD/JG/JJ/JL as applicable) A	unknown
EDH-SQD-00384	**S37425**	PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection	HD/HG/HJ/HL A	unknown
EDH-SQD-00385	**S37426**	PowerPact H-frame terminal nut insert (M6) for bus bar connection	HD/HG/HJ/HL A	unknown
EDH-SQD-00381	**S37429**	PowerPact H-frame control wire terminal for terminal nut (busbar connection)	H-frame with terminal nut inserts A	unknown
EDH-SQD-00432	**S37433**	PowerPact H-frame short rear connections (set of 2)	PowerPact H-frame A	unknown
EDH-SQD-00433	**S37434**	PowerPact H-frame long rear connections (set of 2)	PowerPact H-frame A	unknown

EDH-SQD-00379	S37423	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame control wire terminal for mechanical lugs

OEM part number	S37423	A	S180 p.124, Tables 120 & 122; oem_spec
Description	Voltage takeoff (control wire terminal) secured under the mechanical lug, tab for 0.250 in slip-on connector; field or factory installed	A	same as above
Application	accessory	A	same as above
Installation location	under mechanical lug at breaker terminal	A	same as above
Breaker compatibility	H-frame lugs (HD/HG/HJ/HL or JD/JG/JJ/JL as applicable)	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00384	S37425	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection

OEM part number	S37425	A	S180 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	HD/HG/HJ/HL	A	same as above
Kit contents	2 per kit	A	same as above
Fasteners	tap 1/4-20; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status		

EDH-SQD-00385	S37426	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame terminal nut insert (M6) for bus bar connection

OEM part number	S37426	A	S180 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	HD/HG/HJ/HL	A	same as above
Kit contents	2 per kit	A	same as above
Fasteners	tap M6; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status		

EDH-SQD-00381	S37429	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame control wire terminal for terminal nut (busbar connection)

OEM part number	S37429	A	S180 p.124, Table 122; oem_spec
Description	Control wire terminal for busbar connection using terminal nut insert	A	same as above
Application	accessory	A	same as above
Breaker compatibility	H-frame with terminal nut inserts	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00432	S37433	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame short rear connections (set of 2)

OEM part number	S37433	A	S180 p.123, Table 118; oem_spec
Description	Short rear connections (set of 2), H-frame; order two kits	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	2/3	A	same as above
Kit contents	Short rear connections (set of 2), H-frame; order two kits	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00433	S37434	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame long rear connections (set of 2)

OEM part number	S37434	A	S180 p.123, Table 118; oem_spec
Description	Long rear connections (set of 2), H-frame	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	2/3	A	same as above
Kit contents	Long rear connections (set of 2), H-frame	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00410	**CYA150JD**	PowerPact J-frame Cu compression lug kit	PowerPact J-frame A	unknown
EDH-SQD-00411	**CYA250J3**	PowerPact J-frame Cu compression lug kit	PowerPact J-frame A	unknown
EDH-SQD-00392	**PDC3JD20**	PowerPact J-Frame power distribution connector (multi-wire load lug)	PowerPact J-Frame A	unknown
EDH-SQD-00391	**PDC6JD4**	PowerPact J-Frame power distribution connector (multi-wire load lug)	PowerPact J-Frame A	unknown
EDH-SQD-00397	**YA150JD**	PowerPact J-frame Al/Cu compression lug kit	PowerPact J-frame A	unknown
EDH-SQD-00398	**YA250J35**	PowerPact J-frame Al/Cu compression lug kit	PowerPact J-frame A	unknown

EDH-SQD-00410	CYA150JD	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-frame Cu compression lug kit

OEM part number	CYA150JD	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Current rating	<=150 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	4-2/0 AWG Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37450 (EDH-SQD-00449)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00411	CYA250J3	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-frame Cu compression lug kit

OEM part number	CYA250J3	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Current rating	<=250 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	2/0 AWG-300 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37450 (EDH-SQD-00449)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00392	PDC3JD20	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC3JD20	A	S180 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact J-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Wire range	3 total: (2) 14-6 AWG or 4-1 AWG Cu and (1) 3-2/0 AWG Cu	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		
Open question	*Table 130 lists 'PDC3JD2' for long lug shield compatibility while Table 127 lists PDC3JD20 - same part?*		

EDH-SQD-00391	PDC6JD4	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC6JD4	A	S180 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact J-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Wire range	(6) 8-4 AWG or 14-10 AWG Cu	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00397	YA150JD	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-frame Al/Cu compression lug kit

OEM part number	YA150JD	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Current rating	<=200 A (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	1-3/0 AWG Cu or Al; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37450 (EDH-SQD-00449)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00398	YA250J35	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-frame Al/Cu compression lug kit

OEM part number	YA250J35	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Current rating	<=250 A (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	3/0 AWG-350 kcmil Cu or Al; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37450 (EDH-SQD-00449)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00438	**S37440**	PowerPact J-frame short terminal cover 3p	PowerPact J-frame A	unknown
EDH-SQD-00447	**S37448**	PowerPact J-frame short lug shield	PowerPact J-frame A	unknown
EDH-SQD-00449	**S37450**	PowerPact J-frame long lug shield	PowerPact J-frame A	unknown

EDH-SQD-00438	S37440	Square D	barrier	STATUS UNKNOWN

PowerPact J-frame short terminal cover 3p

OEM part number	S37440	A	S180 p.123, Table 118; oem_spec
Description	Short terminal cover 3P, J-frame	A	same as above
Application	accessory	A	same as above
Installation location	over breaker terminals	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Kit contents	Short terminal cover 3P, J-frame	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00447	S37448	Square D	barrier	STATUS UNKNOWN

PowerPact J-frame short lug shield

OEM part number	S37448	A	S180 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: J-frame short lug shield (mechanical lugs); extension 'B' past end of breaker 0.24 in; max wire size 350 kcmil	A	same as above
Application	accessory	A	same as above
Installation location	over line/load terminals	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Kit contents	1 per kit	A	same as above
Dimensions	dimension B (extension past breaker end) = 0.24 in	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00449	S37450	Square D	barrier	STATUS UNKNOWN

PowerPact J-frame long lug shield

OEM part number	S37450	A	S180 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: J-frame long lug shield (PDC and compression lugs: PDC6JD4, PDC3JD2(0), YA150JD, CYA150JD, CYA250J3); extension 'B' past end of breaker 1.68 in	A	same as above
Application	accessory	A	same as above
Installation location	over line/load terminals	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Kit contents	1 per kit	A	same as above
Dimensions	dimension B (extension past breaker end) = 1.68 in	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00380	**S37424**	PowerPact J-frame control wire terminal for mechanical lugs	J-frame lugs (HD/HG/HJ/HL or JD/JG/JJ/JL as applicable) **A**	unknown
EDH-SQD-00386	**S37427**	PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection	JD/JG/JJ/JL **A**	unknown
EDH-SQD-00387	**S37428**	PowerPact J-frame terminal nut insert (M8) for bus bar connection	JD/JG/JJ/JL **A**	unknown
EDH-SQD-00382	**S37430**	PowerPact J-frame control wire terminal for terminal nut (busbar connection)	J-frame with terminal nut inserts **A**	unknown
EDH-SQD-00435	**S37437**	PowerPact J-frame mixed rear connection kit	PowerPact J-frame **A**	unknown
EDH-SQD-00436	**S37438**	PowerPact J-frame short rear connections (set of 2)	PowerPact J-frame **A**	unknown
EDH-SQD-00437	**S37439**	PowerPact J-frame long rear connections (set of 2)	PowerPact J-frame **A**	unknown

EDH-SQD-00380	S37424	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame control wire terminal for mechanical lugs

OEM part number	S37424	A	S180 p.124, Tables 120 & 122; oem_spec
Description	Voltage takeoff (control wire terminal) secured under the mechanical lug, tab for 0.250 in slip-on connector; field or factory installed	A	same as above
Application	accessory	A	same as above
Installation location	under mechanical lug at breaker terminal	A	same as above
Breaker compatibility	J-frame lugs (HD/HG/HJ/HL or JD/JG/JJ/JL as applicable)	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00386	S37427	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection

OEM part number	S37427	A	S180 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	JD/JG/JJ/JL	A	same as above
Kit contents	2 per kit	A	same as above
Fasteners	tap 1/4-20; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status		

EDH-SQD-00387	S37428	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame terminal nut insert (M8) for bus bar connection

OEM part number	S37428	A	S180 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	JD/JG/JJ/JL	A	same as above
Kit contents	2 per kit	A	same as above
Fasteners	tap M8; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status		

EDH-SQD-00382	S37430	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame control wire terminal for terminal nut (busbar connection)

OEM part number	S37430	A	S180 p.124, Table 122; oem_spec
Description	Control wire terminal for busbar connection using terminal nut insert	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J-frame with terminal nut inserts	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00435	S37437	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame mixed rear connection kit

OEM part number	S37437	A	S180 p.123, Table 118; oem_spec
Description	Mixed rear connection kit, J-frame 3P	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Kit contents	Mixed rear connection kit, J-frame 3P	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00436	S37438	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame short rear connections (set of 2)

OEM part number	S37438	A	S180 p.123, Table 118; oem_spec
Description	Short rear connections (set of 2), J-frame; order two kits	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	2/3	A	same as above
Kit contents	Short rear connections (set of 2), J-frame; order two kits	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00437	S37439	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame long rear connections (set of 2)

OEM part number	S37439	A	S180 p.123, Table 118; oem_spec
Description	Long rear connections (set of 2), J-frame (3P breakers only)	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Kit contents	Long rear connections (set of 2), J-frame (3P breakers only)	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00421	**AL400L61K3**	PowerPact L-frame 250 A mechanical lug kit, Al, 3P	PowerPact L 250 A, 3P, unit-mount and I-Line; FAQ: also optional on 40 A	unknown
EDH-SQD-00422	**AL400L61K4**	PowerPact L-frame 250 A mechanical lug kit, Al, 4P	PowerPact L 250 A, 4P unit mount A	unknown
EDH-SQD-00425	**AL600LF52K3**	PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (short shield, I-Line)	PowerPact L 400/600 A, 3P unit mount and I-Line A	unknown
EDH-SQD-00423	**AL600LS52K3**	PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (medium shield)	PowerPact L 400/600 A, 3P unit mount A	unknown
EDH-SQD-00424	**AL600LS52K4**	PowerPact L-frame 400/600 A mechanical lug kit, Al, 4P (medium shield)	PowerPact L 400/600 A, 4P unit mount A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00426	**CU400L61K3**	PowerPact L-frame 250/400 A mechanical lug kit, Cu, 3P	PowerPact L 250/400 A, 3P, unit mount and I-Line **A**	unknown
EDH-SQD-00427	**CU400L61K4**	PowerPact L-frame 250/400 A mechanical lug kit, Cu, 4P	PowerPact L 250/400 A, 4P, unit mount **A**	unknown
EDH-SQD-00430	**CU600LF52K3**	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P	PowerPact L 400/600 A, 3P, unit mount and I-Line **A**	unknown
EDH-SQD-00428	**CU600LS52K3**	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P	PowerPact L 400/600 A, 3P, unit mount **A**	unknown
EDH-SQD-00429	**CU600LS52K4**	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 4P	PowerPact L 400/600 A, 4P, unit mount **A**	unknown
EDH-SQD-00412	**CYA400L31K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00417	**CYA400L31K4**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00414	**CYA400L51K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00419	**CYA400L51K4**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00416	**CYA400L71K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00413	**CYA600L32K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00418	**CYA600L32K4**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00415	**CYA600L52K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00420	**CYA600L52K4**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00394	**PDC12DG4L3**	PowerPact L-Frame power distribution connector (multi-wire load lug)	PowerPact L-Frame **A**	unknown
EDH-SQD-00393	**PDC5DG20L3**	PowerPact L-Frame power distribution connector (multi-wire load lug)	PowerPact L-Frame **A**	unknown
EDH-SQD-00399	**YA400L31K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00401	**YA400L51K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00405	**YA400L51K4**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00403	**YA400L71K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00407	**YA400L71K4**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00400	**YA600L32K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00404	**YA600L32K4**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00402	**YA600L52K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00406	**YA600L52K4**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown

EDH-SQD-00421	**AL400L61K3**	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 250 A mechanical lug kit, Al, 3P

OEM part number	AL400L61K3	**A**	S180 p.124, Table 121; oem_spec
Alternate / superseded numbers	AL400L6IK3 [alias] (Typographical variant printed under lug illustration in Table 121)	**A**	same as above
Description	Al lugs for Al or Cu wire, 250 A; unit mount and I-Line; short terminal shield	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PowerPact L 250 A, 3P, unit-mount and I-Line; FAQ: also optional on 400/600 A L-frame within wire-size/rating limits	**A**	same as above
Poles	3	**A**	same as above
Current rating	250 A	**A**	same as above
Kit contents	3 lugs per kit; short terminal shield	**A**	same as above
Wire range	(1) 2 AWG-500 kcmil Al or (1) 2 AWG-600 kcmil Cu	**A**	same as above
Material	tin-plated aluminum	**A**	same as above
Identification features	L-frame lugs are pre-tapped for control wire: 8-32 x 1/4 in screw (not provided) into tapped hole in lower left corner of lug	**A**	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00422	AL400L61K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 250 A mechanical lug kit, Al, 4P

OEM part number	AL400L61K4	A	S180 p.124, Table 121; oem_spec
Description	Al lugs for Al or Cu wire, 250 A, 4-pole, unit mount only; short terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 250 A, 4P unit mount	A	same as above
Poles	4	A	same as above
Current rating	250 A	A	same as above
Kit contents	4 lugs per kit; short terminal shield	A	same as above
Wire range	(1) 2 AWG-500 kcmil Al or (1) 2 AWG-600 kcmil Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00425	AL600LF52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (short shield, I-Line)

OEM part number	AL600LF52K3	A	S180 p.124, Table 121; oem_spec
Description	Al lugs for Al or Cu wire, 400/600 A, unit mount and I-Line; short terminal shield; standard on I-Line LGA/LLA/LRA 400 A	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 3P unit mount and I-Line	A	same as above
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	3 lugs per kit; short terminal shield	A	same as above
Wire range	(2) 3/0 AWG-500 kcmil Al or Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00423	AL600LS52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (medium shield)

OEM part number	AL600LS52K3	A	S180 p.124, Table 121; oem_spec
Description	Al lugs for Al or Cu wire, 400/600 A, unit mount; medium terminal shield; standard lug on 400/600 A unit-mount L-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 3P unit mount	A	same as above
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	3 lugs per kit; medium terminal shield	A	same as above
Wire range	(2) 2/0 AWG-500 kcmil Al or Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Digest 2012/2016 lists 'AL600S52K3' - typo for AL600LS52K3 or distinct part?*		

EDH-SQD-00424	AL600LS52K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Al, 4P (medium shield)

OEM part number	AL600LS52K4	A	S180 p.124, Table 121; oem_spec
Description	Al lugs for Al or Cu wire, 400/600 A, 4P unit mount; medium terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 4P unit mount	A	same as above
Poles	4	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	4 lugs per kit; medium terminal shield	A	same as above
Wire range	(2) 2/0 AWG-500 kcmil Al or Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00426	CU400L61K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 250/400 A mechanical lug kit, Cu, 3P

OEM part number	CU400L61K3	A	S180 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; short terminal shield; unit mount and I-Line	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 250/400 A, 3P, unit mount and I-Line	A	same as above
Poles	3	A	same as above
Current rating	250/400 A	A	same as above
Kit contents	3 lugs per kit; short terminal shield	A	same as above
Wire range	as printed: (1) 2 AWG-500 kcmil Al / (1) 2 AWG-600 kcmil Cu (row layout garbled) (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00427	CU400L61K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 250/400 A mechanical lug kit, Cu, 4P

OEM part number	CU400L61K4	A	S180 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; short terminal shield; unit mount	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 250/400 A, 4P, unit mount	A	same as above
Poles	4	A	same as above
Current rating	250/400 A	A	same as above
Kit contents	4 lugs per kit; short terminal shield	A	same as above
Wire range	as printed: (1) 2 AWG-600 kcmil Cu (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00430	CU600LF52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P

OEM part number	CU600LF52K3	A	S180 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; short terminal shield; unit mount and I-Line	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 3P, unit mount and I-Line	A	same as above
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	3 lugs per kit; short terminal shield	A	same as above
Wire range	as printed: (1) 3/0 AWG-500 kcmil (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00428	CU600LS52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P

OEM part number	CU600LS52K3	A	S180 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; medium terminal shield; unit mount	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 3P, unit mount	A	same as above
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	3 lugs per kit; medium terminal shield	A	same as above
Wire range	as printed: (1) 2/0 AWG-500 kcmil (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00429	CU600LS52K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Cu, 4P

OEM part number	CU600LS52K4	A	S180 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; medium terminal shield; unit mount	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 4P, unit mount	A	same as above
Poles	4	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	4 lugs per kit; medium terminal shield	A	same as above
Wire range	as printed: (1) 2/0 AWG-500 kcmil (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00412	CYA400L31K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L31K3	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	285 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	2/0-300 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00417	CYA400L31K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L31K4	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	285 A Cu (rating at 75 C)	A	same as above
Kit contents	4 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	2/0-300 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00414	CYA400L51K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L51K3	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	380 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	250-500 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00419	CYA400L51K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L51K4	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	380 A Cu (rating at 75 C)	A	same as above
Kit contents	4 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	250-500 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00416	CYA400L71K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L71K3	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	475 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	500-750 kcmil Al / 500 kcmil Cu (as printed); 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00413	CYA600L32K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA600L32K3	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	570 A Cu (rating at 75 C)	A	same as above
Kit contents	6 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	2/0-300 kcmil Cu; 2 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00418	CYA600L32K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA600L32K4	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	570 A Cu (rating at 75 C)	A	same as above
Kit contents	8 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	2/0-300 kcmil Cu; 2 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00415	CYA600L52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA600L52K3	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	760 A Cu (rating at 75 C)	A	same as above
Kit contents	6 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	250-500 kcmil Cu; 2 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00420	CYA600L52K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA600L52K4	A	S180 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	760 A Cu (rating at 75 C)	A	same as above
Kit contents	8 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	250-500 kcmil Cu; 2 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00394	PDC12DG4L3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC12DG4L3	A	S180 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact L-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Wire range	(12) 8-4 AWG or 14-10 AWG	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00393	PDC5DG20L3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC5DG20L3	A	S180 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact L-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Wire range	5 total: (3) 4-1 AWG or 14-6 AWG and (2) 3-2/0 AWG	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00399	YA400L31K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L31K3	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	230 A Al / 285 A Cu @75C (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	4-300 kcmil Al/Cu; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00401	YA400L51K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L51K3	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	310 A Al / 380 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	2/0-500 kcmil Al/Cu; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00405	YA400L51K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L51K4	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	310 A Al / 380 A Cu (rating at 75 C)	A	same as above
Kit contents	4 lugs per kit; 2 (as printed) lugs per terminal	A	same as above
Wire range	2/0-500 kcmil Al/Cu; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Wires-per-lug / lugs-per-terminal columns for 4P kits appear transposed vs 3P kits in extracted text - verify against PDF page 127.*		

EDH-SQD-00403	YA400L71K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L71K3	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	385 A Al / 475 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	500-750 kcmil Al or 500 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00407	YA400L71K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L71K4	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	385 A Al / 475 A Cu (rating at 75 C)	A	same as above
Kit contents	4 lugs per kit; 2 (as printed) lugs per terminal	A	same as above
Wire range	500-750 kcmil Al or 500 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Wires-per-lug / lugs-per-terminal columns for 4P kits appear transposed vs 3P kits in extracted text - verify against PDF page 127.*		

EDH-SQD-00400	YA600L32K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA600L32K3	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	460 A Al / 570 A Cu (rating at 75 C)	A	same as above
Kit contents	6 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	4-300 kcmil Al/Cu; 2 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00404	YA600L32K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA600L32K4	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	460 A Al / 570 A Cu (rating at 75 C)	A	same as above
Kit contents	8 lugs per kit; 1 (as printed) lugs per terminal	A	same as above
Wire range	4-300 kcmil Al/Cu; 2 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Wires-per-lug / lugs-per-terminal columns for 4P kits appear transposed vs 3P kits in extracted text - verify against PDF page 127.*		

EDH-SQD-00402	YA600L52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA600L52K3	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	620 A Al / 760 A Cu (rating at 75 C)	A	same as above
Kit contents	6 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	2/0-500 kcmil Al/Cu; 2 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00406	YA600L52K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA600L52K4	A	S180 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	620 A Al / 760 A Cu (rating at 75 C)	A	same as above
Kit contents	8 lugs per kit; 1 (as printed) lugs per terminal	A	same as above
Wire range	2/0-500 kcmil Al/Cu; 2 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Wires-per-lug / lugs-per-terminal columns for 4P kits appear transposed vs 3P kits in extracted text - verify against PDF page 127.*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00443	**S32562**	PowerPact L-frame short terminal cover 3p	PowerPact L-frame **A**	unknown
EDH-SQD-00444	**S32563**	PowerPact L-frame short terminal cover 4p	PowerPact L-frame **A**	unknown

EDH-SQD-00443	S32562	Square D	barrier	STATUS UNKNOWN

PowerPact L-frame short terminal cover 3p

OEM part number	S32562	A	S180 p.123, Table 118; oem_spec
Description	Short terminal cover 3P, L-frame (kit has one cover; order two)	A	same as above
Application	accessory	A	same as above
Installation location	over breaker terminals	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Kit contents	Short terminal cover 3P, L-frame (kit has one cover; order two)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00444	S32563	Square D	barrier	STATUS UNKNOWN

PowerPact L-frame short terminal cover 4p

OEM part number	S32563	A	S180 p.123, Table 118; oem_spec
Description	Short terminal cover 4P, L-frame (order two)	A	same as above
Application	accessory	A	same as above
Installation location	over breaker terminals	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Kit contents	Short terminal cover 4P, L-frame (order two)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00388	**S36967**	PowerPact L/D-frame terminal screw set, M10 x 25 (4 pcs, one side)	PowerPact L-frame; D-frame (4P) A	unknown

EDH-SQD-00388	S36967	Square D	fastener	STATUS UNKNOWN

PowerPact L/D-frame terminal screw set, M10 x 25 (4 pcs, one side)

OEM part number	S36967	A	S180 p.123 Table 119; p.125 Table 126; oem_spec
Alternate / superseded numbers	36967	A	S182 alias; p.3-29 Table 3.94; oem_spec
Description	Set of 4 M10 x 25 terminal screws and washers for one side; L-frame rear connection and bus bar hardware; D-frame 4P bus bar hardware (Digest 36967)	A	S180 p.123 Table 119; p.125 Table 126; oem_spec
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame; D-frame (4P)	A	same as above
Kit contents	4 screws + washers	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR), Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00383	**29348**	PowerPact L-frame / D-frame control tap takeoff (voltage takeoff)	L-frame (s1); D-frame 400/600 A lugs (s3) A	unknown
EDH-SQD-00439	**S32477**	PowerPact L-frame mixed rear connection kit	PowerPact L-frame A	unknown
EDH-SQD-00440	**S32478**	PowerPact L-frame mixed rear connection kit	PowerPact L-frame A	unknown
EDH-SQD-00441	**S432475**	PowerPact L-frame short rear connections (set of 2)	PowerPact L-frame A	unknown
EDH-SQD-00442	**S432476**	PowerPact L-frame long rear connections (set of 2)	PowerPact L-frame A	unknown

EDH-SQD-00383	29348	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame / D-frame control tap takeoff (voltage takeoff)

OEM part number	29348	A	S180 p.124, Table 122; oem_spec
Alternate / superseded numbers	S29348 (Printed '29348' without S prefix; other PowerPact kits use S prefix - unverified)	D	S180 alias; p.124; inference
Description	Control tap takeoff, L-frame; also listed as 'Voltage Takeoffs (set of two)' for D-frame lugs in Digest	A	S180 p.124, Table 122; oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame (s1); D-frame 400/600 A lugs (s3)	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR), Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00439	S32477	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame mixed rear connection kit

OEM part number	S32477	A	S180 p.123, Table 118; oem_spec
Description	Mixed rear connection kit, L-frame 3P	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Kit contents	Mixed rear connection kit, L-frame 3P	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00440	S32478	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame mixed rear connection kit

OEM part number	S32478	A	S180 p.123, Table 118; oem_spec
Description	Mixed rear connection kit, L-frame 4P	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Kit contents	Mixed rear connection kit, L-frame 4P	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00441	S432475	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame short rear connections (set of 2)

OEM part number	S432475	A	S180 p.123, Table 118; oem_spec
Description	Short rear connections (set of 2), L-frame; parts only, no hardware (see S36967); order two kits	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Kit contents	Short rear connections (set of 2), L-frame; parts only, no hardware (see S36967); order two kits	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Requires	S36967 (EDH-SQD-00388)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00442	S432476	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame long rear connections (set of 2)

OEM part number	S432476	A	S180 p.123, Table 118; oem_spec
Description	Long rear connections (set of 2), L-frame; parts only, no hardware	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Kit contents	Long rear connections (set of 2), L-frame; parts only, no hardware	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Requires	S36967 (EDH-SQD-00388)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact M-Frame (MG/MJ)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00511	**AL800M23K**	PowerPact M/P-frame 800 A mechanical lug kit, Al	PowerPact M and P frame 800 A (distributor) C	unknown
EDH-SQD-00502	**AL800M23TK**	PowerPact M/P tapped (control-wire) lug kit 800 A	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M A	unknown
EDH-SQD-00504	**AL800M23TK4**	PowerPact M/P tapped (control-wire) lug kit 800 A	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M A	unknown
EDH-SQD-00503	**AL800P6TK**	PowerPact M/P tapped (control-wire) lug kit 800 A	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M A	unknown
EDH-SQD-00505	**AL800P6TK4**	PowerPact M/P tapped (control-wire) lug kit 800 A	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M A	unknown
EDH-SQD-00512	**AL800P7K**	PowerPact M/P-frame 800 A mechanical lug kit, Al (750 kcmil)	PowerPact M and P frame 800 A unit mount (distributor) C	unknown

EDH-SQD-00511	AL800M23K	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P-frame 800 A mechanical lug kit, Al

OEM part number	AL800M23K	C	S196 distributor
Description	Mechanical lug kit, 800 A, aluminum, for PowerPact M- and P-frame (distributor description)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	PowerPact M and P frame 800 A (distributor)	C	same as above
Kit contents	3-piece set (distributor)	C	same as above
Wire range	3/0 AWG-500 kcmil Al/Cu (distributor)	C	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	OEM table reference, conductors per lug, Dimensions, OEM instruction document, Status, Torque values		
Open question	*Obtain 0612CT0101 (PowerPact M/P/R catalog) lug table to confirm (likely (2) or (3) conductors per lug).*		

EDH-SQD-00502	AL800M23TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P tapped (control-wire) lug kit 800 A

OEM part number	AL800M23TK	A	S182 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M23/P6 fits M vs P)	A	same as above
Current rating	800 A	A	same as above
Kit contents	3 per standard package	A	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		
Open question	*Does AL800M23TK fit MG/MJ only and AL800P6TK PG/PJ/PL only?*		

EDH-SQD-00504	AL800M23TK4	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P tapped (control-wire) lug kit 800 A

OEM part number	AL800M23TK4	A	S182 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M23/P6 fits M vs P)	A	same as above
Current rating	800 A	A	same as above
Kit contents	4 per standard package	A	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		
Open question	*Does AL800M23TK fit MG/MJ only and AL800P6TK PG/PJ/PL only?*		

EDH-SQD-00503	AL800P6TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P tapped (control-wire) lug kit 800 A

OEM part number	AL800P6TK	A	S182 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M23/P6 fits M vs P)	A	same as above
Current rating	800 A	A	same as above
Kit contents	3 per standard package	A	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		
Open question	*Does AL800M23TK fit MG/MJ only and AL800P6TK PG/PJ/PL only?*		

EDH-SQD-00505	AL800P6TK4	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P tapped (control-wire) lug kit 800 A

OEM part number	AL800P6TK4	A	S182 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M23/P6 fits M vs P)	A	same as above
Current rating	800 A	A	same as above
Kit contents	4 per standard package	A	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		
Open question	*Does AL800M23TK fit MG/MJ only and AL800P6TK PG/PJ/PL only?*		

EDH-SQD-00512	AL800P7K	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P-frame 800 A mechanical lug kit, Al (750 kcmil)

OEM part number	AL800P7K	C	S196 distributor
Description	Mechanical lug kit for 800 A M/P frame unit-mount breakers (distributor description)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	PowerPact M and P frame 800 A unit mount (distributor)	C	same as above
Wire range	3/0 AWG-750 kcmil Al/Cu; 750 kcmil compact Al only (distributor)	C	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	conductors per lug, Dimensions, OEM instruction document, kit quantity, Status, Torque values		

Breaker family Square D PowerPact P-Frame (PG/PJ/PL)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00506	**AL1200P24TK**	PowerPact P tapped (control-wire) lug kit 1200 A	PG, PJ, PL 1200 A **A**	unknown
EDH-SQD-00507	**AL1200P25TK**	PowerPact P tapped (control-wire) lug kit 1200 A	PG, PJ, PL 1200 A **A**	unknown
EDH-SQD-00508	**AL1200P25TK4**	PowerPact P tapped (control-wire) lug kit 1200 A	PG, PJ, PL 1200 A **A**	unknown

EDH-SQD-00506	AL1200P24TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact P tapped (control-wire) lug kit 1200 A

OEM part number	AL1200P24TK	**A**	S182 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PG, PJ, PL 1200 A	**A**	same as above
Current rating	1200 A	**A**	same as above
Kit contents	1 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		

EDH-SQD-00507	AL1200P25TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact P tapped (control-wire) lug kit 1200 A

OEM part number	AL1200P25TK	**A**	S182 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PG, PJ, PL 1200 A	**A**	same as above
Current rating	1200 A	**A**	same as above
Kit contents	3 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		

EDH-SQD-00508	AL1200P25TK4	Square D	lug-kit	STATUS UNKNOWN

PowerPact P tapped (control-wire) lug kit 1200 A

OEM part number	AL1200P25TK4	**A**	S182 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PG, PJ, PL 1200 A	**A**	same as above
Current rating	1200 A	**A**	same as above
Kit contents	4 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		

Breaker family Square D PowerPact R-Frame (RG/RJ/RL)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00509	**AL1200R53TK**	PowerPact R tapped (control-wire) lug kit 1200 A	RG, RJ, RL 1200 A (I-Line only) **A**	unknown

EDH-SQD-00509	AL1200R53TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact R tapped (control-wire) lug kit 1200 A

OEM part number	AL1200R53TK	**A**	S182 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact (I-Line only)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	RG, RJ, RL 1200 A (I-Line only)	**A**	same as above
Current rating	1200 A	**A**	same as above
Kit contents	1 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact R-Frame (RG/RJ/RL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		

4.17 General / family not yet assigned

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00471	**GYT**	Square D G-frame terminal shield 3P	Square D G-frame 3P **A**	unknown

EDH-SQD-00471	GYT	Square D	barrier	STATUS UNKNOWN

Square D G-frame terminal shield 3P

OEM part number	GYT	**A**	S183 p.3-25, Table 3.69; oem_spec
Description	Terminal shield, G-frame (3P)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Square D G-frame 3P	**A**	same as above
Kit contents	1 per kit	**A**	same as above
Not yet documented	breaker family record not created for Square D G-frame, Dimensions, OEM instruction document, Status, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00967	**QO1SE**	Square D QO load center cover sealing strap	—	unknown

EDH-SQD-00967	QO1SE	Square D	hardware-kit	STATUS UNKNOWN

Square D QO load center cover sealing strap

OEM part number	QO1SE	**A**	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Description	Cover sealing strap: provides means of sealing trim mounting screws on QO load center covers.	**A**	same as above
Not yet documented	Dimensions, Material, Status		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00968	**LSDL**	Square D replacement cover directory label	—	unknown
EDH-SQD-00969	**PSDS**	Square D circuit identification stickers for use on cover directory labels	—	unknown

EDH-SQD-00968	LSDL	Square D	other	STATUS UNKNOWN

Square D replacement cover directory label

OEM part number	LSDL	A	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Description	Replacement cover directory label, 1 through 42 numbered universal, for load center covers.	A	same as above
Not yet documented	Dimensions, Material, Status		

EDH-SQD-00969	PSDS	Square D	other	STATUS UNKNOWN

Square D circuit identification stickers for use on cover directory labels

OEM part number	PSDS	A	S639 2012 Digest Section 1, Table 1.32 QO Load Center Accessories, p. 1-11; oem_spec
Description	Circuit identification stickers for use on cover directory labels.	A	same as above
Not yet documented	Dimensions, Material, Status		

5 GE / ABB lineage

Lineage / brand markings: General Electric Industrial Solutions; ABB from 2018; ReliaGear

Family	Type	Status	Era	Entries	Pg
A-SERIES A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	panelboard	current as of BuyLog 07/2014	—	129	1054
A-SERIES-COL A-Series Column Panelboards (ALC, AQC, AEC)	panelboard	unknown	—	8	1095
A-SERIES-PWR A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	panelboard	current as of BuyLog 07/2014	—	68	1096
CCB-QMR Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	panelboard	Renewal parts still listed 2014; QMR fusible switches 'Limited availability. Obsolete when inventory depleted.'	Types NCB and CCB listed as GE power distribution panelboards in March 1955; 1951 Trumbull 'Convertible Circuit Breaker Panelboards' (likely origin of the CCB letters)	132	1110
CONVERTI-FUSE Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	panelboard	Obsolete	Safe-Converti-Fuse introduced by Trumbull c.1930; Converti-Fuse and Swing-Wa catalogued 1951 and listed by GE in 1955 (registered GE trade-marks)	0	1149
NHB NAB / NHB bolt-on panelboards (legacy)	panelboard	discontinued (legacy); hardware sold as new-surplus	NAB catalogued 1951 (Trumbull, Type AT breakers); 'Types NAB, NHB' listed in GE March 1955 advertisement; GE 1949 hospital handbook lists 'Type NAB, NA, Multi-Breaker' panels	1	1150
NLAB GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	panelboard	Obsolete (superseded by GE A-Series lighting panelboards - inference from GE line chronology; no GE supersession statement found)	NLAB (formerly NTQ) and NLTQ catalogued 1951; NLTQ introduced c.1951 as 'Trumbull's new NLTQ panelboard' with first plug-in quick-make quick-break breaker; NAB, NHB, NLAB, NLTQ, NLTQX listed in 1955 GE ad; renewal parts GEG-13610B 'Types DB, NLTQ and NLAB, Style 5' with GEJ-3006A (1969)	24	1151
RG-LIGHTING ReliaGear lighting panelboards (Types RQ, RE, RL, RS, RD; AD interiors)	panelboard	unknown	—	11	1158
RG-NEXT ReliaGear neXT Power Panelboards	panelboard	unknown	—	6	1161
SCP-PLUS Spectra Series Type SCP Plus panelboards	panelboard	unknown	—	82	1163
SPECTRA-PP Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	panelboard	ABB guide: "Please note that Spectra, TED, FE, and FG breakers are obsolete"; Spectra bolt-on additions are served by Tmax XT retrofit kits (SRFB...)	—	406	1184
TRUMBULL Trumbull Electric (Plainville CT) panelboards and switches	panelboard	Obsolete; forum states GE and Trumbull breakers share part numbers (e.g., TQL/THQL)	Trumbull Electric Mfg. Co., Plainville CT, labelled 'A General Electric Organization'; split-bus panels into early 1960s	0	1371
AV-LINE AV-Line switchboards (legacy)	switchboard	unknown	—	14	1372
RG-SB ReliaGear SB low voltage switchboards	switchboard	Current (ABB)	Introduced c.2020 (Electrical Wholesaler Top 10 New Product Picks Sept 2020); replaced Spectra Series switchboards 2021	2	1373

Family	Type	Status	Era	Entries	Pg
SPECTRA-SB Spectra Series Switchboards (group-mounted Class 1; plug-in Spectra distribution panels)	switchboard	Obsolete (ABB LCM). Replacement: ReliaGear SB switchboards; Tmax XT retrofit kits for Spectra bolt-on panelboards/switchboards (single mount 250/600/1200 A, dual mount 150/250/400 A) offered for field replacement	GET-8032C catalog dated 02/2013 (marked "GE legacy document"); phased out by ABB 2021: no new quotes after May 20 2021, no orders after Aug 12 2021, no shipments after Dec 9 2021	123	1374

5.1 A-SERIES — A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)

FAM-GEA-001 · panelboard · aka A Series, A-Series II, AD, AD Plus, AE, AEF, AL, AQ, AQF, AS, Pro-Stock · markings: ABB, GE, GE Industrial Solutions, General Electric

GE's lighting/appliance panelboard platform. Symmetrical 20 in wide x 5.81 in deep galvanized boxes with removable endwalls, branch-bus direct connection and captive branch hardware. Type letter indicates breaker family: AL = plug-in Q-line, AQ = bolt-on Q-line (THQB), AE = bolt-on E-frame (TEY) 480Y/277 V, AD = 600 V TED/SE/FB. Pro-Stock unassembled interiors (AQU/AEU) are completed with MB main breaker kits, ML main lug kits and NK neutral kits. Pages in the 2014 BuyLog are headed 'A-Series II' on the column-panel kit page.

Attribute	Value	Cl.	Sources
Status	current as of BuyLog 07/2014	A	S143 p.11-1; oem_spec
Voltage rating	AL/AQ 240 Vac max; AE/AS 480Y/277 Vac, 125/250 Vdc; AD 600 Vac	A	S143 p.11-4 to 11-6; oem_spec
Main ampacity	Main lug 125-800 A (AD 150-800 A); main breaker up to 800 A (SK)	A	S143 p.11-4, 11-5, 11-6; oem_spec
Branch breakers accepted	AL plug-in THQL/THHQL/TXQL; AQ bolt-on THQB/THHQB/TXQB; AE bolt-on TEY/TEYF/TEYD/TEYH/TEYL; AD bolt-on TED/THED/SE/FB; subfeeds TQD/THQD (AQ) or TED/TFJ/SE/SF (AE/AD)	A	S143 p.11-4 to 11-6; oem_spec
Dimensions	Box width 20 in, depth 5.81 in; lengths 25.5-88.5 in	A	S143 p.11-4; oem_spec
Seismic	IBC Zone 3/4 and CBC Zone 4 certified	A	S143 p.11-3; oem_spec

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, TFJ / TFK / THFK / TFL, THQB / THHQB / TXQB, THQL / THHQL / TXQL, TJD / TJJ / TJK / THJK, TQD / THQD
Key documents: S143 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S144 BuyLog p.11-10 Rev. 11/13 GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Pa
Also fits this family (entry printed elsewhere): ASPSERENT

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00059	**MB133**	A-Series Pro-Stock main/sub-feed breaker kit MB133	TED (18k) / THED (22k); SEHA/SELA/SEPA A	unknown
EDH-GEA-00060	**MB133WB**	A-Series Pro-Stock main/sub-feed breaker kit MB133WB	SEHA + kit (breaker included) A	unknown
EDH-GEA-00051	**MB233**	A-Series Pro-Stock main/sub-feed breaker kit MB233	SFHA, SFLA, SFPA A	unknown
EDH-GEA-00053	**MB2332**	A-Series Pro-Stock main/sub-feed breaker kit MB2332	2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only) A	unknown
EDH-GEA-00054	**MB2332WB**	A-Series Pro-Stock main/sub-feed breaker kit MB2332WB	2nd SFHA + kit (breaker included) A	unknown
EDH-GEA-00052	**MB233WB**	A-Series Pro-Stock main/sub-feed breaker kit MB233WB	SFHA + kit (breaker included) A	unknown
EDH-GEA-00045	**MB332**	A-Series Pro-Stock main/sub-feed breaker kit MB332	SGHA (65k), SGLA (100k), SGPA (200k) A	unknown
EDH-GEA-00046	**MB332WB**	A-Series Pro-Stock main/sub-feed breaker kit MB332WB	SGHA + kit (breaker included) A	unknown
EDH-GEA-00055	**MB333**	A-Series Pro-Stock main/sub-feed breaker kit MB333	SGHA, SGLA, SGPA A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00056	**MB333WB**	A-Series Pro-Stock main/sub-feed breaker kit MB333WB	SGHA + kit (breaker included) **A**	unknown
EDH-GEA-00057	**MB423**	A-Series Pro-Stock main/sub-feed breaker kit MB423	TEY (14k) **A**	unknown
EDH-GEA-00058	**MB426**	A-Series Pro-Stock main/sub-feed breaker kit MB426	(2) TEY **A**	unknown
EDH-GEA-00044	**MB512**	A-Series Pro-Stock main/sub-feed breaker kit MB512	TQD (10k) / THQD (22k) **A**	unknown
EDH-GEA-00049	**MB513**	A-Series Pro-Stock main/sub-feed breaker kit MB513	TQD / THQD **A**	unknown
EDH-GEA-00050	**MB516**	A-Series Pro-Stock main/sub-feed breaker kit MB516	(2) TQD / (2) THQD **A**	unknown
EDH-GEA-00042	**MB612**	A-Series Pro-Stock main/sub-feed breaker kit MB612	THQB (10k) / THHQB (22k) **A**	unknown
EDH-GEA-00047	**MB613**	A-Series Pro-Stock main/sub-feed breaker kit MB613	THQB / THHQB **A**	unknown
EDH-GEA-00043	**MB614**	A-Series Pro-Stock main/sub-feed breaker kit MB614	(2) THQB / (2) THHQB **A**	unknown
EDH-GEA-00048	**MB616**	A-Series Pro-Stock main/sub-feed breaker kit MB616	(2) THQB / (2) THHQB **A**	unknown

EDH-GEA-00059 — MB133

GE · main-breaker-kit · **STATUS UNKNOWN**

A-Series Pro-Stock main/sub-feed breaker kit MB133

OEM part number	MB133	**A**	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 150 A, 3 poles; breakers: TED (18k) / THED (22k); SEHA/SELA/SEPA	**A**	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	**A**	S143 p.11-15 note; oem_spec
Breaker compatibility	TED (18k) / THED (22k); SEHA/SELA/SEPA	**A**	S143 p.11-15; oem_spec
Poles	3	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	Breaker not included	**A**	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00060 — MB133WB

GE · main-breaker-kit · **STATUS UNKNOWN**

A-Series Pro-Stock main/sub-feed breaker kit MB133WB

OEM part number	MB133WB	**A**	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 150 A, 3 poles; breakers: SEHA + kit (breaker included)	**A**	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	**A**	S143 p.11-15 note; oem_spec
Breaker compatibility	SEHA + kit (breaker included)	**A**	S143 p.11-15; oem_spec
Poles	3	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	**A**	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00051	MB233	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB233

OEM part number	MB233	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V and AEU3 480/277V 3ph interior, 225 A, 3 poles; breakers: SFHA, SFLA, SFPA	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S143 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00053	MB2332	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB2332

OEM part number	MB2332 (Printed 'MB23325'/'MB2332WB5' where trailing 5 is footnote 5 (6-pole subfeed))	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400 A, 6 poles; breakers: 2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only)	A	S143 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		
Open question	*Requires MB233 or MB233WB to achieve 6 poles of subfeed*		

EDH-GEA-00054	MB2332WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB2332WB

OEM part number	MB2332WB (Printed 'MB23325'/'MB2332WB5' where trailing 5 is footnote 5 (6-pole subfeed))	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400 A, 6 poles; breakers: 2nd SFHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	2nd SFHA + kit (breaker included)	A	S143 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		
Open question	*Requires MB233 or MB233WB to achieve 6 poles of subfeed*		

EDH-GEA-00052	MB233WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB233WB

OEM part number	MB233WB	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 225 A, 3 poles; breakers: SFHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	SFHA + kit (breaker included)	A	S143 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00045	MB332	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB332

OEM part number	MB332	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 400/600 A, 2 poles; breakers: SGHA (65k), SGLA (100k), SGPA (200k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	SGHA (65k), SGLA (100k), SGPA (200k)	A	S143 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00046	MB332WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB332WB

OEM part number	MB332WB	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 600 A, 2 poles; breakers: SGHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	SGHA + kit (breaker included)	A	S143 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	600 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00055	MB333	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB333

OEM part number	MB333	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400/600 A, 3 poles; breakers: SGHA, SGLA, SGPA	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	SGHA, SGLA, SGPA	A	S143 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00056	MB333WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB333WB

OEM part number	MB333WB	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 600 A, 3 poles; breakers: SGHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	SGHA + kit (breaker included)	A	S143 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	600 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00057	MB423	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB423

OEM part number	MB423	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 100 A, 3 poles; breakers: TEY (14k)	A	same as above
	empower: "PRO-STK M BRK KIT 480Y/277V 3PH" (UPC 783175408399)	A	S426 empower page MB423; oem_spec
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	TEY (14k)	A	S143 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00058	MB426	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB426

OEM part number	MB426	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 100 A, 6 poles; breakers: (2) TEY	A	same as above
	empower: "BREAKER KITS: TEY: 6P" (UPC 783175121120)	A	S426 empower page MB426; oem_spec
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	(2) TEY	A	S143 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00044	MB512	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB512

OEM part number	MB512	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 225 A, 2 poles; breakers: TQD (10k) / THQD (22k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	TQD (10k) / THQD (22k)	A	S143 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00049	MB513	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB513

OEM part number	MB513	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 225 A, 3 poles; breakers: TQD / THQD	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	TQD / THQD	A	S143 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00050	MB516	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB516

OEM part number	MB516	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 400 A, 6 poles; breakers: (2) TQD / (2) THQD	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	(2) TQD / (2) THQD	A	S143 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00042	MB612	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB612

OEM part number	MB612	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 100 A, 2 poles; breakers: THQB (10k) / THHQB (22k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	THQB (10k) / THHQB (22k)	A	S143 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00047	MB613	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB613

OEM part number	MB613	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 100 A, 3 poles; breakers: THQB / THHQB	A	same as above
	empower: "PRO-STK M BRK KIT 240V 3PH" (UPC 783175408467)	A	S426 empower page MB613; oem_spec
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	THQB / THHQB	A	S143 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00043	MB614	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB614

OEM part number	MB614	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 100 A, 4 poles; breakers: (2) THQB / (2) THHQB	A	same as above
	empower: "BREAKER KITS: THQB: 4P" (UPC 783175120376)	A	S426 empower page MB614; oem_spec
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	(2) THQB / (2) THHQB	A	S143 p.11-15; oem_spec
Poles	4	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00048	MB616	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB616

OEM part number	MB616	A	S143 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 100 A, 6 poles; breakers: (2) THQB / (2) THHQB	A	same as above
	empower: "BREAKER KITS: THQB: 6P" (UPC 783175120383)	A	S426 empower page MB616; oem_spec
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S143 p.11-15 note; oem_spec
Breaker compatibility	(2) THQB / (2) THHQB	A	S143 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S143 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00061	**MLA1**	A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)	—	unknown
EDH-GEA-00062	**MLA2**	A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)	—	unknown
EDH-GEA-00063	**MLA41**	A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)	—	unknown
EDH-GEA-00064	**MLA61**	A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)	—	unknown
EDH-GEA-00065	**MLA62**	A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)	—	unknown
EDH-GEA-00066	**MLR1**	A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)	—	unknown
EDH-GEA-00067	**MLR2**	A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)	—	unknown
EDH-GEA-00068	**MLR41**	A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)	—	unknown
EDH-GEA-00069	**MLR61**	A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00070	**MLT1**	A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)	—	unknown
EDH-GEA-00071	**MLT2**	A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)	—	unknown
EDH-GEA-00073	**MLT41**	A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)	—	unknown
EDH-GEA-00072	**MLT42**	A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)	—	unknown

EDH-GEA-00061	**MLA1**	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)

OEM part number	MLA1	**A**	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure (mechanical), 225 A, standard	**A**	same as above
	empower: "RGLP MERCH LUG KIT STANDARD PRESSURE" (UPC 783175408313)	**A**	S426 empower page MLA1; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	**A**	S143 p.11-17; oem_spec
Current rating	225 A	**A**	same as above
Kit contents	Wire range 6-350 MCM	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00062	**MLA2**	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)

OEM part number	MLA2	**A**	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 225 A, oversized 225 A; also 225 A dual main	**A**	same as above
	empower: "PRO-STK LUG KIT OVERSIZED PRESSURE" (UPC 783175408320)	**A**	S426 empower page MLA2; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	**A**	S143 p.11-17; oem_spec
Current rating	225 A	**A**	same as above
Kit contents	Wire range 1-600 MCM or (2) 1/0-250 MCM	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00063	**MLA41**	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)

OEM part number	MLA41	**A**	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 400 A, standard	**A**	same as above
	empower: "MAIN LUG KITS: 400A" (UPC 783175121205)	**A**	S426 empower page MLA41; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	**A**	S143 p.11-17; oem_spec
Current rating	400 A	**A**	same as above
Kit contents	Wire range 2-600 MCM or (2) 1/0-250 MCM	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00064	MLA61	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)

OEM part number	MLA61	A	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 600 A, standard 600 A; also 400 A dual main	A	same as above
	empower: "MAIN LUG KITS: 600A" (UPC 783175121229)	A	S426 empower page MLA61; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S143 p.11-17; oem_spec
Current rating	600 A	A	same as above
Kit contents	Wire range (2) 2/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00065	MLA62	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)

OEM part number	MLA62	A	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 400/600 A, oversized	A	same as above
	empower: "MAIN LUG KITS: 600A OVERSIZE" (UPC 783175121236)	A	S426 empower page MLA62; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S143 p.11-17; oem_spec
Current rating	400/600 A	A	same as above
Kit contents	Wire range 3/0-800 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00066	MLR1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)

OEM part number	MLR1	A	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 225 A, standard	A	same as above
	empower: "PRO-STK LUG KIT STANDARD COPPER" (UPC 783175408351)	A	S426 empower page MLR1; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S143 p.11-17; oem_spec
Current rating	225 A	A	same as above
Kit contents	Wire range 4-350 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00067	MLR2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)

OEM part number	MLR2	A	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 225 A, oversized	A	same as above
	empower: "PRO-STK LUG KIT OVERSIZE COPPER" (UPC 783175408368)	A	S426 empower page MLR2; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S143 p.11-17; oem_spec
Current rating	225 A	A	same as above
Kit contents	Wire range 1-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00068	MLR41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)

OEM part number	MLR41	A	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 400 A, standard	A	same as above
	empower: "MAIN LUG KITS: 400A CU" (UPC 783175121250)	A	S426 empower page MLR41; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S143 p.11-17; oem_spec
Current rating	400 A	A	same as above
Kit contents	Wire range 1-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00069	MLR61	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)

OEM part number	MLR61	A	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 400/600 A, standard 600 A; oversized 400 A	A	same as above
	empower: "MAIN LUG KITS: 600A CU" (UPC 783175121274)	A	S426 empower page MLR61; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S143 p.11-17; oem_spec
Current rating	400/600 A	A	same as above
Kit contents	Wire range (2) 2/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00070	MLT1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)

OEM part number	MLT1	A	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 225 A, standard	A	same as above
	empower: "PRO-STK LUG KIT STANDARD COMPRES" (UPC 783175408337)	A	S426 empower page MLT1; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S143 p.11-17; oem_spec
Current rating	225 A	A	same as above
Kit contents	Wire range 2/0-300 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00071	MLT2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)

OEM part number	MLT2	A	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 225 A, oversized	A	same as above
	empower: "PRO-STK LUG KIT OVERSIZE COMPRES" (UPC 783175408344)	A	S426 empower page MLT2; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S143 p.11-17; oem_spec
Current rating	225 A	A	same as above
Kit contents	Wire range 4/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00073	MLT41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)

OEM part number	MLT41	A	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 400 A, oversized	A	same as above
	empower: "MAIN LUG KITS: 400A COMPRESSION" (UPC 783175121243)	A	S426 empower page MLT41; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S143 p.11-17; oem_spec
Current rating	400 A	A	same as above
Kit contents	Wire range 500-750 MCM (500 MCM Cu, 750 MCM Al)	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00072	MLT42	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)

OEM part number	MLT42	A	S143 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 400 A, standard	A	same as above
	empower: "MAIN LUG KITS: 400A COMPRESSION" (UPC 783164608052)	A	S426 empower page MLT42; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S143 p.11-17; oem_spec
Current rating	400 A	A	same as above
Kit contents	Wire range 250-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00038	**ASPFB12P**	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	—	listed 07/2014
EDH-GEA-00039	**ASPFB3P**	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	—	listed 07/2014
EDH-GEA-00036	**ASPTED3P**	A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE	—	listed 07/2014
EDH-GEA-00037	**ASPTQD3P**	A-Series Breaker mounting hardware kit, breaker type TQD/THQD	—	listed 07/2014

EDH-GEA-00038	ASPFB12P	GE	breaker-mounting-kit	LISTED 07/2014

A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles

OEM part number	ASPFB12P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	A	S143 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	A	same as above
Application	branch (to mount breaker in existing space - footnote 1)	A	same as above
Kit contents	Mounting screws and washers only (footnote 2)	A	same as above
Status	listed 07/2014	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00039	ASPFB3P	GE	breaker-mounting-kit	LISTED 07/2014

A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles

OEM part number	ASPFB3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	A	S143 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	A	same as above
Application	branch (to mount breaker in existing space - footnote 1)	A	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	A	same as above
Status	listed 07/2014	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00036	ASPTED3P	GE	breaker-mounting-kit	LISTED 07/2014

A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE

OEM part number	ASPTED3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	A	S143 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type TED/THED4/SE	A	same as above
	empower: "TED HARDWARE KIT" (UPC 783175131259)	A	S426 empower page ASPTED3P; oem_spec
Application	branch (to mount breaker in existing space - footnote 1)	A	S143 p.11-19; oem_spec
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	A	same as above
Status	listed 07/2014	A	same as above
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BASPTED ('Kit OEM # ASPTED3P; A Series I only, not A Series II; mounts one TED 3-pole'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S627 distributor
Cross-links	Families: A-SERIES · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00037	ASPTQD3P	GE	breaker-mounting-kit	LISTED 07/2014

A-Series Breaker mounting hardware kit, breaker type TQD/THQD

OEM part number	ASPTQD3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	A	S143 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type TQD/THQD	A	same as above
Application	branch (to mount breaker in existing space - footnote 1)	A	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	A	same as above
Status	listed 07/2014	A	same as above
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BASPTQD ('Kit OEM # ASPTQD3P; A Series I only; one TQD 3-pole'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S627 distributor
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00074	**NKA**	A-Series 200% neutral kit NKA (225 A)	—	unknown
EDH-GEA-00075	**NKA42**	A-Series 200% neutral kit NKA42 (400 A)	—	unknown
EDH-GEA-00080	**NKA4FT**	A-Series 200% neutral kit NKA4FT (400 A)	—	unknown
EDH-GEA-00076	**NKR**	A-Series 200% neutral kit NKR (225 A)	—	unknown
EDH-GEA-00077	**NKR4**	A-Series 200% neutral kit NKR4 (400 A)	—	unknown
EDH-GEA-00078	**NKT**	A-Series 200% neutral kit NKT (225 A)	—	unknown
EDH-GEA-00079	**NKT4**	A-Series 200% neutral kit NKT4 (400 A)	—	unknown

EDH-GEA-00074	NKA	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKA (225 A)

OEM part number	NKA	A	S143 p.11-17; oem_spec
Description	200% neutral kit, Pressure lugs, 225 A	A	same as above
	empower: "RLP MERCH 200% NEUT KIT STD PRES L" (UPC 783175408474)	A	S426 empower page NKA; oem_spec
Current rating	225 A	A	S143 p.11-17; oem_spec
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00075	NKA42	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKA42 (400 A)

OEM part number	NKA42	A	S143 p.11-17; oem_spec
Description	200% neutral kit, Pressure lugs, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00080	NKA4FT	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKA4FT (400 A)

OEM part number	NKA4FT	A	S143 p.11-17 footnote 2; oem_spec
Description	200% neutral kit, Pressure, 200% neutral feed-thru lugs, 400 A; wire range (2) 2/0-600 MCM or (4) 4-250 MCM; ref. GO-101P	A	S143 p.11-17; oem_spec
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00076	NKR	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKR (225 A)

OEM part number	NKR	A	S143 p.11-17; oem_spec
Description	200% neutral kit, Copper lugs, 225 A	A	same as above
Current rating	225 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00077	NKR4	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKR4 (400 A)

OEM part number	NKR4	A	S143 p.11-17; oem_spec
Description	200% neutral kit, Copper lugs, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00078	NKT	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKT (225 A)

OEM part number	NKT	A	S143 p.11-17; oem_spec
Description	200% neutral kit, Compression lugs, 225 A	A	same as above
Current rating	225 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00079	NKT4	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKT4 (400 A)

OEM part number	NKT4	A	S143 p.11-17; oem_spec
Description	200% neutral kit, Compression lugs, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00097	**EGS12**	A-Series Equipment ground, standard isolated/insulated, per 12 branch positions	—	unknown
EDH-GEA-00096	**TGL2**	A-Series Equipment ground, standard bonded to box, per 12 branch positions	—	unknown
EDH-GEA-00095	**TGL20**	A-Series Main lug for equipment ground terminal kits	—	unknown

EDH-GEA-00097	EGS12	GE	ground-bar	STATUS UNKNOWN

A-Series Equipment ground, standard isolated/insulated, per 12 branch positions

OEM part number	EGS12	A	S143, S144, S670 p.11-19; p.11-10; oem_spec
Description	Equipment ground, standard isolated/insulated, per 12 branch positions	A	S143, S144 p.11-19; p.11-10; oem_spec
	empower: "EQUIPMENT GROUND KIT" (UPC 783175811700)	A	S426 empower page EGS12; oem_spec
Application	Insulated equipment ground kit for ReliaGear lighting panelboard types RQ, RL, RE (instruction covers EGS12/EGC12)	A	S670 p.1; oem_spec
OEM instruction document	1TQC173000E0023 / GEH5037	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL, RG-LIGHTING		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00096	TGL2	GE	ground-bar	STATUS UNKNOWN

A-Series Equipment ground, standard bonded to box, per 12 branch positions

OEM part number	TGL2	A	S143, S144 p.11-19; p.11-10; oem_spec
Description	Equipment ground, standard bonded to box, per 12 branch positions ((11) 14-8 Cu/12-8 Al, (3) 14-4 Cu/6-4 Al)	A	same as above
	empower: "EQUIPMENT GROUND KIT" (UPC 783164008746)	A	S426 empower page TGL2; oem_spec
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00095	TGL20	GE	ground-bar	STATUS UNKNOWN

A-Series Main lug for equipment ground terminal kits

OEM part number	TGL20	A	S143, S144 p.11-19; p.11-10; oem_spec
Description	Main lug for equipment ground terminal kits (6-2/0 Cu/Al)	A	same as above
	empower: "EQUIPMENT GROUND KIT" (UPC 783164087581)	A	S426 empower page TGL20; oem_spec
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00089	**ASPAQLEBKT**	A-Series AQ/AL/AE rail bracket	—	unknown

EDH-GEA-00089	ASPAQLEBKT	GE	mounting-bracket	STATUS UNKNOWN

A-Series AQ/AL/AE rail bracket

OEM part number	ASPAQLEBKT	A	S143, S667 p.11-20; oem_spec
Description	AQ/AL/AE rail bracket	A	S143 p.11-20; oem_spec
	AQ/AL/AE rail bracket (A-Series field-installed kit / replacement part, order from factory).	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
	Center support brackets field-installed to an RQ/RE/RL interior in 64 in and 76 in high ReliaGear enclosures where the interior has bowed outward from the back of the enclosure due to excessive breaker or cable weight	A	S667 p.1; oem_spec
Kit contents	Bracket(s) and two #10-32 screws ("#10 x 32" as printed)	B	S667 p.1 step 6; oem_spec
Fasteners	Two 0.173 in diameter holes drilled in enclosure center (position A) if not present; bracket fastened with two #10-32 screws	A	S667 p.1, Fig. 3; oem_spec
OEM instruction document	1TQC173000Z0022 / DEH41056 (MAR2020)	A	S667 p.4; oem_spec
Cross-links	Families: A-SERIES, A-SERIES-PWR, RG-LIGHTING		
Not yet documented	Dimensions, Material, Status		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00087	**ASP25AD65KA**	A-Series AD 25 to 65 kAIC barrier kit	—	unknown

EDH-GEA-00087	ASP25AD65KA	GE	barrier	STATUS UNKNOWN

A-Series AD 25 to 65 kAIC barrier kit

OEM part number	ASP25AD65KA	A	S143 p.11-20; oem_spec
Description	AD 25 to 65 kAIC barrier kit	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00040	**TEDFP1**	A-Series filler plate for TQD/THQD/TED4/SE/FB	—	unknown
EDH-GEA-00041	**TQLFP1**	A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY	—	unknown

EDH-GEA-00040	TEDFP1	GE	filler-plate	STATUS UNKNOWN

A-Series filler plate for TQD/THQD/TED4/SE/FB

OEM part number	TEDFP1	A	S143 p.11-19; oem_spec
Description	TQD/THQD/TED4/SE/FB Filler Plates	A	same as above
	empower: "TED FILLER PLATE" (UPC 783175166701)	A	S426 empower page TEDFP1; oem_spec
Installation location	A-Series deadfront	B	S143 inference
Cross-links	Families: A-SERIES · Breakers: TQD / THQD, TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA), Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Material, Status		

EDH-GEA-00041	TQLFP1	GE	filler-plate	STATUS UNKNOWN

A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY

OEM part number	TQLFP1	A	S143, S144 p.11-19; p.11-10; oem_spec
Description	THQB/THHQB/THQL/THHQL/TEY Filler Plates; 'Filler Plate for Q Line and TEY Breakers'	A	same as above
	empower: "1" FRONT FILLER PLATE - QTY 1" (UPC 783164140156)	A	S426 empower page TQLFP1; oem_spec
Cross-links	Families: A-SERIES, A-SERIES-COL · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Material, Status		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00693	**139C5700G11**	GE front extension mounting kit	—	unknown
EDH-GEA-00692	**139C5700G6**	GE front hinge-to-box mounting kit	—	unknown
EDH-GEA-00090	**139C5720G3**	A-Series AE front mounting kit	—	unknown
EDH-GEA-00091	**139C5720G6**	A-Series AQ/AL front mounting kit	—	unknown
EDH-GEA-00092	**139C5720G9**	A-Series AD front mounting kit	—	unknown
EDH-GEA-00694	**ASPFLUSHADJ**	GE front flush adjust kit	—	unknown
EDH-GEA-00081	**BNDKT**	A-Series Service entrance kit 225 A	—	unknown
EDH-GEA-00082	**BNDKT6**	A-Series Service entrance kit 400/600 A	—	unknown
EDH-GEA-00689	**NEMATRX**	GE NEMA 3R/12 tamper-proof Torx screw kit	—	unknown

EDH-GEA-00693	139C5700G11	GE	hardware-kit	STATUS UNKNOWN

GE front extension mounting kit

OEM part number	139C5700G11	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Front extension mounting kit (A-Series field-installed kit / replacement part, order from factory).	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00692	139C5700G6	GE	hardware-kit	STATUS UNKNOWN

GE front hinge-to-box mounting kit

OEM part number	139C5700G6	**A**	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Front hinge to box mounting kit (A-Series field-installed kit / replacement part, order from factory).	**A**	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00090	139C5720G3	GE	hardware-kit	STATUS UNKNOWN

A-Series AE front mounting kit

OEM part number	139C5720G3	**A**	S143 p.11-20; oem_spec
Description	AE front mounting kit	**A**	same as above
	AE front mounting kit (A-Series field-installed kit / replacement part, order from factory).	**A**	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00091	139C5720G6	GE	hardware-kit	STATUS UNKNOWN

A-Series AQ/AL front mounting kit

OEM part number	139C5720G6	**A**	S143 p.11-20; oem_spec
Description	AQ/AL front mounting kit	**A**	same as above
	AQ/AL front mounting kit (A-Series field-installed kit / replacement part, order from factory).	**A**	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00092	139C5720G9	GE	hardware-kit	STATUS UNKNOWN

A-Series AD front mounting kit

OEM part number	139C5720G9	**A**	S143 p.11-20; oem_spec
Description	AD front mounting kit	**A**	same as above
	AD front mounting kit (A-Series field-installed kit / replacement part, order from factory).	**A**	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00694	ASPFLUSHADJ	GE	hardware-kit	STATUS UNKNOWN

GE front flush adjust kit

OEM part number	ASPFLUSHADJ	**A**	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Front flush adjust kit (A-Series field-installed kit / replacement part, order from factory).	**A**	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00081	BNDKT	GE	hardware-kit	STATUS UNKNOWN

A-Series Service entrance kit 225 A

OEM part number	BNDKT	**A**	S143 p.11-17; oem_spec
Description	Service entrance kit 225 A (bonding strap with hardware and service entrance label)	**A**	same as above
	empower: "PRO-STK BONDING STRAP KIT SERV ENTR" (UPC 783175408771)	**A**	S426 empower page BNDKT; oem_spec
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00082	BNDKT6	GE	hardware-kit	STATUS UNKNOWN

A-Series Service entrance kit 400/600 A

OEM part number	BNDKT6	**A**	S143 p.11-17; oem_spec
Description	Service entrance kit 400/600 A (bonding strap with hardware and SE label)	**A**	same as above
	empower: "BONDING KIT" (UPC 783175121311)	**A**	S426 empower page BNDKT6; oem_spec
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00689	NEMATRX	GE	hardware-kit	STATUS UNKNOWN

GE NEMA 3R/12 tamper-proof Torx screw kit

OEM part number	NEMATRX	**A**	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	NEMA 3R/12 tamper proof Tork screw kit (A-Series field-installed kit / replacement part, order from factory).	**A**	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00656	**FEMSK1**	GE mounting screw kit (#10) for tapped holes, Record Plus FE 250	FE 250 **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00623	**TQBS1**	GE breaker mounting screw for THQB bolt-on Q-Line breakers	THQB **A**	unknown

EDH-GEA-00656	FEMSK1	GE	fastener	NOT LISTED IN ABB ECAT

GE mounting screw kit (#10) for tapped holes, Record Plus FE 250

OEM part number	FEMSK1	A	S198, S200 p. 6-82; oem_spec
Description	Mounting screw kit (#10) for tapped holes.	A	same as above
Application	accessory	A	S198 p. 6-82; oem_spec
Breaker compatibility	FE 250	A	same as above
	Record Plus FE250	A	S198, S200 Rev 1/19 p.6-82; Rev 9/12 p.3-103; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Families: A-SERIES · Breakers: Record Plus FE 250		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00623	TQBS1	GE	fastener	STATUS UNKNOWN

GE breaker mounting screw for THQB bolt-on Q-Line breakers

OEM part number	TQBS1	A	S198 p. 6-30, Breaker Mounting Screw Kit; oem_spec
Description	Breaker mounting screw kit for THQB. Price is per screw; packaged in quantities of 24; must be ordered in multiples of 24.	A	same as above
Application	branch	A	same as above
Installation location	Secures bolt-on THQB breaker to the A-Series (AQ) interior	C	S198 p. 6-30; inference
Breaker compatibility	THQB	A	S198 p. 6-30, Breaker Mounting Screw Kit; oem_spec
Kit contents	Sold per screw, packaged in 24s	A	S198 p. 6-30, footnote 3; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, Material, Status		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00084	**APHBL**	A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	—	unknown
EDH-GEA-00083	**APHBQ**	A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	—	unknown
EDH-GEA-00086	**ASP2PTFJ3P**	A-Series 2P to 3P SF conversion kit for horizontal subfeed	—	unknown
EDH-GEA-00085	**ASP2PTQD3P**	A-Series 2P to 3P TQD conversion kit	—	unknown

EDH-GEA-00084	APHBL	GE	conversion-kit	STATUS UNKNOWN

A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels

OEM part number	APHBL	A	S143 p.11-20; oem_spec
Description	Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00083	APHBQ	GE	conversion-kit	STATUS UNKNOWN

A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels

OEM part number	APHBQ	A	S143 p.11-20; oem_spec
Description	Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00086	ASP2PTFJ3P	GE	conversion-kit	STATUS UNKNOWN

A-Series 2P to 3P SF conversion kit for horizontal subfeed

OEM part number	ASP2PTFJ3P	**A**	S143 p.11-20; oem_spec
Description	2P to 3P SF conversion kit for horizontal subfeed	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00085	ASP2PTQD3P	GE	conversion-kit	STATUS UNKNOWN

A-Series 2P to 3P TQD conversion kit

OEM part number	ASP2PTQD3P	**A**	S143 p.11-20; oem_spec
Description	2P to 3P TQD conversion kit	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00679	**FABAM01W**	GE Record Plus FB/FC bell alarm 1 nc	Record Plus FB 100 (3-pole), FC 100 (2/3-pole) **A**	unknown
EDH-GEA-00678	**FABAM10W**	GE Record Plus FB/FC bell alarm 1 no	Record Plus FB 100 (3-pole), FC 100 (2/3-pole) **A**	unknown
EDH-GEA-00676	**FAS01LW**	GE Record Plus FB/FC auxiliary switch 1 nc, left mount	Record Plus FB 100 (3-pole), FC 100 (2/3-pole) **A**	unknown
EDH-GEA-00677	**FAS01RW**	GE Record Plus FB/FC auxiliary switch 1 nc, right mount	Record Plus FB 100 (3-pole), FC 100 (2/3-pole) **A**	unknown
EDH-GEA-00674	**FAS10LW**	GE Record Plus FB/FC auxiliary switch 1 no, left mount	Record Plus FB 100 (3-pole), FC 100 (2/3-pole) **A**	unknown
EDH-GEA-00675	**FAS10RW**	GE Record Plus FB/FC auxiliary switch 1 no, right mount	Record Plus FB 100 (3-pole), FC 100 (2/3-pole) **A**	unknown
EDH-GEA-00670	**FASHT7W**	GE Record Plus FB/FC shunt trip, 277 VAC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00660	**FASHTBW**	GE Record Plus FB/FC shunt trip, 12 VDC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00661	**FASHTDW**	GE Record Plus FB/FC shunt trip, 24 VAC/DC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00663	**FASHTFW**	GE Record Plus FB/FC shunt trip, 48 VAC/DC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00665	**FASHTJW**	GE Record Plus FB/FC shunt trip, 110-130 VAC/110-125 VDC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00667	**FASHTKW**	GE Record Plus FB/FC shunt trip, 120 VAC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00668	**FASHTNW**	GE Record Plus FB/FC shunt trip, 220/240 VAC, 250 VDC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00672	**FASHTUW**	GE Record Plus FB/FC shunt trip, 400/480 VAC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00671	**FAUVR7W**	GE Record Plus FB/FC undervoltage release, 277 VAC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00662	**FAUVRDW**	GE Record Plus FB/FC undervoltage release, 24 VAC/DC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00664	**FAUVRFW**	GE Record Plus FB/FC undervoltage release, 48 VAC/DC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00666	**FAUVRJW**	GE Record Plus FB/FC undervoltage release, 110-130 VAC/110-125 VDC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00669	**FAUVRNW**	GE Record Plus FB/FC undervoltage release, 220/240 VAC, 250 VDC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00673	**FAUVRUW**	GE Record Plus FB/FC undervoltage release, 400/480 VAC	Record Plus FB 100, FC 100 **A**	unknown
EDH-GEA-00088	**TQDFM1**	A-Series 2-3 pole TQD mechanical interlock	—	unknown

EDH-GEA-00679	FABAM01W	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC bell alarm 1 nc

OEM part number	FABAM01W	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Bell alarm 1 NC; rated 5 A @ 277 VAC, 0.3 A @ 125 VDC (FB table; FC table states 5 A @ 240 VAC, 0.5 A @ 125 VDC); #16 AWG leads, 36 in, UL listed for field installation. FB 100: 3-pole only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 (3-pole), FC 100 (2/3-pole)	A	same as above
OEM instruction document	DEH-40324	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00678	FABAM10W	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC bell alarm 1 no

OEM part number	FABAM10W	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Bell alarm 1 NO; rated 5 A @ 277 VAC, 0.3 A @ 125 VDC (FB table; FC table states 5 A @ 240 VAC, 0.5 A @ 125 VDC); #16 AWG leads, 36 in, UL listed for field installation. FB 100: 3-pole only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 (3-pole), FC 100 (2/3-pole)	A	same as above
OEM instruction document	DEH-40324	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00676	FAS01LW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC auxiliary switch 1 nc, left mount

OEM part number	FAS01LW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Auxiliary switch 1 NC, left mount; rated 5 A @ 277 VAC, 0.3 A @ 125 VDC (FB table; FC table states 5 A @ 240 VAC, 0.5 A @ 125 VDC); #16 AWG leads, 36 in, UL listed for field installation. FB 100: 3-pole only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 (3-pole), FC 100 (2/3-pole)	A	same as above
OEM instruction document	DEH-40324	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00677	FAS01RW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC auxiliary switch 1 nc, right mount

OEM part number	FAS01RW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Auxiliary switch 1 NC, right mount; rated 5 A @ 277 VAC, 0.3 A @ 125 VDC (FB table; FC table states 5 A @ 240 VAC, 0.5 A @ 125 VDC); #16 AWG leads, 36 in, UL listed for field installation. FB 100: 3-pole only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 (3-pole), FC 100 (2/3-pole)	A	same as above
OEM instruction document	DEH-40324	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00674	FAS10LW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC auxiliary switch 1 no, left mount

OEM part number	FAS10LW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Auxiliary switch 1 NO, left mount; rated 5 A @ 277 VAC, 0.3 A @ 125 VDC (FB table; FC table states 5 A @ 240 VAC, 0.5 A @ 125 VDC); #16 AWG leads, 36 in, UL listed for field installation. FB 100: 3-pole only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 (3-pole), FC 100 (2/3-pole)	A	same as above
OEM instruction document	DEH-40324	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00675	FAS10RW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC auxiliary switch 1 no, right mount

OEM part number	FAS10RW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Auxiliary switch 1 NO, right mount; rated 5 A @ 277 VAC, 0.3 A @ 125 VDC (FB table; FC table states 5 A @ 240 VAC, 0.5 A @ 125 VDC); #16 AWG leads, 36 in, UL listed for field installation. FB 100: 3-pole only.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 (3-pole), FC 100 (2/3-pole)	A	same as above
OEM instruction document	DEH-40324	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00670	FASHT7W	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC shunt trip, 277 VAC

OEM part number	FASHT7W	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Shunt trip release, 277 VAC; UL listed for field installation; prewired with 36 in #18 AWG leads (black). One per 2- or 3-pole breaker (none in 1-pole FB).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	277 VAC	A	same as above
OEM instruction document	DEH-40324 (wire lead colors)	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00660	FASHTBW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC shunt trip, 12 VDC

OEM part number	FASHTBW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Shunt trip release, 12 VDC; UL listed for field installation; prewired with 36 in #18 AWG leads (black). One per 2- or 3-pole breaker (none in 1-pole FB).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	12 VDC	A	same as above
OEM instruction document	DEH-40324 (wire lead colors)	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00661	FASHTDW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC shunt trip, 24 VAC/DC

OEM part number	FASHTDW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Shunt trip release, 24 VAC/DC; UL listed for field installation; prewired with 36 in #18 AWG leads (black). One per 2- or 3-pole breaker (none in 1-pole FB).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	24 VAC/DC	A	same as above
OEM instruction document	DEH-40324 (wire lead colors)	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00663	FASHTFW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC shunt trip, 48 VAC/DC

OEM part number	FASHTFW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Shunt trip release, 48 VAC/DC; UL listed for field installation; prewired with 36 in #18 AWG leads (black). One per 2- or 3-pole breaker (none in 1-pole FB).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	48 VAC/DC	A	same as above
OEM instruction document	DEH-40324 (wire lead colors)	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00665	FASHTJW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC shunt trip, 110-130 VAC/110-125 VDC

OEM part number	FASHTJW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Shunt trip release, 110-130 VAC/110-125 VDC; UL listed for field installation; prewired with 36 in #18 AWG leads (black). One per 2- or 3-pole breaker (none in 1-pole FB).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	110-130 VAC/110-125 VDC	A	same as above
OEM instruction document	DEH-40324 (wire lead colors)	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00667	FASHTKW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC shunt trip, 120 VAC

OEM part number	FASHTKW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Shunt trip release, 120 VAC; UL listed for field installation; prewired with 36 in #18 AWG leads (black). One per 2- or 3-pole breaker (none in 1-pole FB).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	120 VAC	A	same as above
OEM instruction document	DEH-40324 (wire lead colors)	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00668	FASHTNW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC shunt trip, 220/240 VAC, 250 VDC

OEM part number	FASHTNW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Shunt trip release, 220/240 VAC, 250 VDC; UL listed for field installation; prewired with 36 in #18 AWG leads (black). One per 2- or 3-pole breaker (none in 1-pole FB).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	220/240 VAC, 250 VDC	A	same as above
OEM instruction document	DEH-40324 (wire lead colors)	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00672	FASHTUW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC shunt trip, 400/480 VAC

OEM part number	FASHTUW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Shunt trip release, 400/480 VAC; UL listed for field installation; prewired with 36 in #18 AWG leads (black). One per 2- or 3-pole breaker (none in 1-pole FB).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	400/480 VAC	A	same as above
OEM instruction document	DEH-40324 (wire lead colors)	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00671	FAUVR7W	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC undervoltage release, 277 VAC

OEM part number	FAUVR7W	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Undervoltage release, 277 VAC; UL listed for field installation; prewired 36 in leads (blue). Shares mounting pocket with shunt trip.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	277 VAC	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00662	FAUVRDW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC undervoltage release, 24 VAC/DC

OEM part number	FAUVRDW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Undervoltage release, 24 VAC/DC; UL listed for field installation; prewired 36 in leads (blue). Shares mounting pocket with shunt trip.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	24 VAC/DC	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00664	FAUVRFW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC undervoltage release, 48 VAC/DC

OEM part number	FAUVRFW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Undervoltage release, 48 VAC/DC; UL listed for field installation; prewired 36 in leads (blue). Shares mounting pocket with shunt trip.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	48 VAC/DC	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00666	FAUVRJW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC undervoltage release, 110-130 VAC/110-125 VDC

OEM part number	FAUVRJW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Undervoltage release, 110-130 VAC/110-125 VDC; UL listed for field installation; prewired 36 in leads (blue). Shares mounting pocket with shunt trip.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	110-130 VAC/110-125 VDC	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00669	FAUVRNW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC undervoltage release, 220/240 VAC, 250 VDC

OEM part number	FAUVRNW	A	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Undervoltage release, 220/240 VAC, 250 VDC; UL listed for field installation; prewired 36 in leads (blue). Shares mounting pocket with shunt trip.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100, FC 100	A	same as above
Voltage rating	220/240 VAC, 250 VDC	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00673	FAUVRUW	GE	breaker-accessory	STATUS UNKNOWN

GE Record Plus FB/FC undervoltage release, 400/480 VAC

OEM part number	FAUVRUW	**A**	S198 pp. 6-72..6-73 (FB 100) and 6-77 (FC 100), Internal Accessories (UL Listed for field installation); oem_spec
Description	Undervoltage release, 400/480 VAC; UL listed for field installation; prewired 36 in leads (blue). Shares mounting pocket with shunt trip.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FB 100, FC 100	**A**	same as above
Voltage rating	400/480 VAC	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00088	TQDFM1	GE	breaker-accessory	STATUS UNKNOWN

A-Series 2-3 pole TQD mechanical interlock

OEM part number	TQDFM1	**A**	S143 p.11-20; oem_spec
Description	2-3 pole TQD mechanical interlock	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00646	**TEYLD1**	GE handle locking device (non-padlocking) for TEY	TEY **A**	unknown
EDH-GEA-00624	**TEYXHT2**	GE TEYD/H/L 2-pole handle tie	TEYD, TEYH, TEYL **A**	unknown
EDH-GEA-00625	**TEYXHT2K**	GE TEYD/H/L 2-pole handle tie, 10-pack	TEYD, TEYH, TEYL **A**	unknown
EDH-GEA-00626	**TEYXHT3**	GE TEYD/H/L 3-pole handle tie	TEYD, TEYH, TEYL **A**	unknown
EDH-GEA-00627	**TEYXHT3K**	GE TEYD/H/L 3-pole handle tie, 10-pack	TEYD, TEYH, TEYL **A**	unknown
EDH-GEA-00648	**TFKLD1**	GE handle locking device (non-padlocking) for F225 line	F225 line, THLC2, THLC4 (TFJ, TFL, TLB4 per panelboard section) **A**	unknown
EDH-GEA-00573	**THL103**	GE breaker handle locking device (non-padlocking) for TQB, TQC and TQL breakers, Model 5	TQB, TQC, TQL **A**	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00620	**THT104**	GE snap-on handle tie, solid, Q-Line	TQB, TQC, TQL **A**	unknown
EDH-GEA-00647	**TLD3**	GE handle locking device (non-padlocking) for E150 line	E150 line (TEB, TED, THED) **A**	unknown
EDH-GEA-00621	**TQ3HTK**	GE multiwire branch handle tie kit, three single-pole Q-Line breakers	TQB, TQC, TQL **A**	unknown
EDH-GEA-00622	**TQ4HTK**	GE multiwire branch handle tie kit, four single-pole Q-Line breakers	TQB, TQC, TQL **A**	unknown
EDH-GEA-00619	**TQHT1**	GE snap-on handle tie, trip indicating, Q-Line	TQB, TQC, TQL **A**	unknown
EDH-GEA-00614	**TQPL**	GE non-padlocking handle lock for THQP and Q-Line GF breakers	THQP; TQB...GF; TQC...GF; TQL...GF **A**	unknown

EDH-GEA-00646	TEYLD1	GE	handle-lock	STATUS UNKNOWN

GE handle locking device (non-padlocking) for TEY

OEM part number	TEYLD1	**A**	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Handle locking device (non-padlocking).	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TEY	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00624	TEYXHT2	GE	handle-lock	STATUS UNKNOWN

GE TEYD/H/L 2-pole handle tie

OEM part number	TEYXHT2	**A**	S198 p. 6-33, TEYD/TEYH/TEYL accessories; oem_spec
Description	TEYD/H/L 2-pole handle tie	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TEYD, TEYH, TEYL	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Material, Status		
Open question	*Table is headed "Internal Accessories - Factory Installed Only"; confirm the handle ties are field installable.*		

EDH-GEA-00625	TEYXHT2K	GE	handle-lock	STATUS UNKNOWN

GE TEYD/H/L 2-pole handle tie, 10-pack

OEM part number	TEYXHT2K	**A**	S198 p. 6-33, TEYD/TEYH/TEYL accessories; oem_spec
Description	TEYD/H/L 2-pole handle tie, 10-pack	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TEYD, TEYH, TEYL	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Material, Status		
Open question	*Table is headed "Internal Accessories - Factory Installed Only"; confirm the handle ties are field installable.*		

EDH-GEA-00626	TEYXHT3	GE	handle-lock	STATUS UNKNOWN

GE TEYD/H/L 3-pole handle tie

OEM part number	TEYXHT3	**A**	S198 p. 6-33, TEYD/TEYH/TEYL accessories; oem_spec
Description	TEYD/H/L 3-pole handle tie	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TEYD, TEYH, TEYL	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Material, Status		
Open question	*Table is headed "Internal Accessories - Factory Installed Only"; confirm the handle ties are field installable.*		

EDH-GEA-00627	TEYXHT3K	GE	handle-lock	STATUS UNKNOWN

GE TEYD/H/L 3-pole handle tie, 10-pack

OEM part number	TEYXHT3K	A	S198 p. 6-33, TEYD/TEYH/TEYL accessories; oem_spec
Description	TEYD/H/L 3-pole handle tie, 10-pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TEYD, TEYH, TEYL	A	same as above
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Material, Status		
Open question	*Table is headed "Internal Accessories - Factory Installed Only"; confirm the handle ties are field installable.*		

EDH-GEA-00648	TFKLD1	GE	handle-lock	STATUS UNKNOWN

GE handle locking device (non-padlocking) for F225 line

OEM part number	TFKLD1	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Handle locking device (non-padlocking).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F225 line, THLC2, THLC4 (TFJ, TFL, TLB4 per panelboard section)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR · Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00573	THL103	General Electric	handle-lock	OBSOLETE (1969 RENEWAL

GE breaker handle locking device (non-padlocking) for TQB, TQC and TQL breakers, Model 5

OEM part number	THL103	A	S453, S198 oem_spec
Description	Breaker handle locking device, non padlocking type for TQB, TQC and TQL breaker - THL103 Model 5	A	S453 GEG-13610B renewal parts list; oem_spec
	Handle lock - non padlocking. Kit includes (1) lock for 1-pole breaker and (1) lock for 2-pole breaker.	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	TQB, TQC, TQL	A	S453 oem_spec
	TQB, TQC, TQL (Q-Line); listed in A-Series panelboard section for THQL, THHQL, THQB, THHQB	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Kit contents	(1) lock for 1-pole breaker and (1) lock for 2-pole breaker	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties, footnote 5; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: A-SERIES, NLAB · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00620	THT104	GE	handle-lock	STATUS UNKNOWN

GE snap-on handle tie, solid, Q-Line

OEM part number	THT104	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Description	Snap-on handle tie - solid; for two single-pole breakers.	A	same as above
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	TQB, TQC, TQL	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Kit contents	Ties two single-pole breakers	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties, footnote 6; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00647	TLD3	GE	handle-lock	STATUS UNKNOWN

GE handle locking device (non-padlocking) for E150 line

OEM part number	TLD3	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Handle locking device (non-padlocking).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150 line (TEB, TED, THED)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR · Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00621	TQ3HTK	GE	handle-lock	STATUS UNKNOWN

GE multiwire branch handle tie kit, three single-pole Q-Line breakers

OEM part number	TQ3HTK	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Description	Multiwire branch breaker handle tie kit for three single-pole breakers.	A	same as above
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	TQB, TQC, TQL	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Kit contents	For three single-pole breakers - kit includes (10) pcs.	A	S200 p. 3-29 (Rev. 9/12), footnote 8; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00622	TQ4HTK	GE	handle-lock	STATUS UNKNOWN

GE multiwire branch handle tie kit, four single-pole Q-Line breakers

OEM part number	TQ4HTK	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Description	Multiwire branch breaker handle tie kit for four single-pole breakers.	A	same as above
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	TQB, TQC, TQL	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Kit contents	For four single-pole breakers - kit includes (10) pcs.	A	S200 p. 3-29 (Rev. 9/12), footnote 9; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00619	TQHT1	GE	handle-lock	STATUS UNKNOWN

GE snap-on handle tie, trip indicating, Q-Line

OEM part number	TQHT1	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Description	Snap-on handle tie - trip indicating; for two single-pole breakers. Handle ties provide manual on-off capability only between one-pole devices (multi-pole breakers have internal common trip).	A	same as above
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	TQB, TQC, TQL	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Kit contents	Ties two single-pole breakers	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties, footnote 6; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00614	TQPL	GE	handle-lock	STATUS UNKNOWN

GE non-padlocking handle lock for THQP and Q-Line GF breakers

OEM part number	TQPL	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Description	Handle lock - non padlocking.	A	same as above
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	THQP; TQB...GF; TQC...GF; TQL...GF	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Material, Status		
Open question	*Row layout on p.6-30 places TQPL and THL103 on adjacent lines; Rev. 9/12 p.3-29 confirms TQPL ($5.50) is the GF / THQP non-padlocking lock - verify against an IL.*		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00652	**FB1PE**	GE padlock, EUSERC toggle, Record Plus FB 100	FB 100 A	unknown
EDH-GEA-00651	**FB1PF**	GE padlock, fixed toggle, Record Plus FB 100	FB 100 A	unknown
EDH-GEA-00654	**FC1PE**	GE padlock, EUSERC toggle, Record Plus FC 100	FC 100 A	unknown
EDH-GEA-00653	**FC1PF**	GE padlock, fixed toggle, Record Plus FC 100	FC 100 A	unknown
EDH-GEA-00655	**FE1PE**	GE EUSERC compliant padlock, Record Plus FE 250	FE 250 A	unknown
EDH-GEA-00630	**TEFPLD1**	GE standard padlocking device for E150 line, TB1	E150 line, TB1 (panelboard section: TED, TEL; TEB, TED, THED) A	unknown
EDH-GEA-00629	**TEYPLD1**	GE standard padlocking device for TEY	TEY A	unknown
EDH-GEA-00628	**TEYXPLD1**	GE padlock device for TEYD/TEYH/TEYL	TEYD, TEYH, TEYL A	unknown
EDH-GEA-00631	**TFKPLD1**	GE standard padlocking device for F225 line	F225 line (TFJ, TFL per panelboard section) A	unknown
EDH-GEA-00575	**THP100**	GE breaker handle padlocking device for TQB and TQL breakers, Model 3	TQB, TQL A	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00613	**THQGFPLD1**	GE padlocking handle lock for single-pole Q-Line GF breakers	TQB...GF, TQC...GF, TQL...GF; suitable for single-pole GF breakers onl A	unknown
EDH-GEA-00617	**TQDLPDL1**	GE padlocking device for TQDL breakers	TQDL A	Listed in 2012 BuyLog; absent from 2019 BuyLog table (status
EDH-GEA-00615	**TQDPLD1**	GE padlocking device for TQD/THQD Q-Line 225 A breakers	TQD (Q-Line 225 A); for breakers used in group-mounted panelboard cons A	unknown
EDH-GEA-00616	**TQPDLD2**	GE padlocking device for TQD, EUSERC approved (factory installed only)	TQD A	EUSERC approved - factory installed only (not a field kit)
EDH-GEA-00574	**TQPLD1**	GE breaker handle padlocking device for TQC breakers	TQC A	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00618	**TQPPL**	GE padlocking device for THQP breakers	THQP (Q-Line half-size) A	unknown

EDH-GEA-00652	FB1PE	GE	padlock-attachment	STATUS UNKNOWN

GE padlock, EUSERC toggle, Record Plus FB 100

OEM part number	FB1PE	A	S198 p. 6-73; oem_spec
Description	Padlock EUSERC toggle.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FB 100	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00651	FB1PF	GE	padlock-attachment	STATUS UNKNOWN

GE padlock, fixed toggle, Record Plus FB 100

OEM part number	FB1PF	A	S198 p. 6-73; oem_spec
Description	Padlock fixed toggle.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FB 100	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00654	FC1PE	GE	padlock-attachment	STATUS UNKNOWN

GE padlock, EUSERC toggle, Record Plus FC 100

OEM part number	FC1PE	A	S198 p. 6-77; oem_spec
Description	Padlock EUSERC toggle.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FC 100	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00653	FC1PF	GE	padlock-attachment	STATUS UNKNOWN

GE padlock, fixed toggle, Record Plus FC 100

OEM part number	FC1PF	A	S198 p. 6-77; oem_spec
Description	Padlock fixed toggle.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FC 100	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00655	FE1PE	GE	padlock-attachment	STATUS UNKNOWN

GE EUSERC compliant padlock, Record Plus FE 250

OEM part number	FE1PE	A	S198 p. 6-82; oem_spec
Description	EUSERC compliant padlock.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FE 250	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FE 250		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00630	TEFPLD1	GE	padlock-attachment	STATUS UNKNOWN

GE standard padlocking device for E150 line, TB1

OEM part number	TEFPLD1	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Standard padlocking device. Suitable for breakers used in group-mounted panelboard construction only, except J600, K1200, SE150/SF250, SG600 and SK1200 which screw down to the face of the breaker.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150 line, TB1 (panelboard section: TED, TEL; TEB, TED, THED)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR · Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00629	TEYPLD1	GE	padlock-attachment	STATUS UNKNOWN

GE standard padlocking device for TEY

OEM part number	TEYPLD1	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Standard padlocking device. Suitable for breakers used in group-mounted panelboard construction only, except J600, K1200, SE150/SF250, SG600 and SK1200 which screw down to the face of the breaker.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TEY	A	same as above
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00628	TEYXPLD1	GE	padlock-attachment	STATUS UNKNOWN

GE padlock device for TEYD/TEYH/TEYL

OEM part number	TEYXPLD1	A	S198 p. 6-33, TEYD/TEYH/TEYL accessories; oem_spec
Description	TEYD/TEYH/TEYL padlock device.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TEYD, TEYH, TEYL	A	same as above
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Material, Status		
Open question	*Relationship to TEYPLD1 (listed as TEY standard padlocking device p.6-100) unclear - successor or variant for D/H/L types?*		

EDH-GEA-00631	TFKPLD1	GE	padlock-attachment	STATUS UNKNOWN

GE standard padlocking device for F225 line

OEM part number	TFKPLD1	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Standard padlocking device. Suitable for breakers used in group-mounted panelboard construction only, except J600, K1200, SE150/SF250, SG600 and SK1200 which screw down to the face of the breaker.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F225 line (TFJ, TFL per panelboard section)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR · Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00575	THP100	General Electric	padlock-attachment	OBSOLETE (1969 RENEWAL

GE breaker handle padlocking device for TQB and TQL breakers, Model 3

OEM part number	THP100	A	S453, S198 oem_spec
Description	Breaker handle padlocking device for TQB and TQL breakers - THP100 Model 3	A	S453 GEG-13610B renewal parts list; oem_spec
	Handle lock - padlocking (single padlock).	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	TQB, TQL	A	S453 oem_spec
	TQB, TQL; panelboard section lists THQL, THHQL, TXQL, THQB, THHQB, TXQB	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: A-SERIES, NLAB · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00613	THQGFPLD1	GE	padlock-attachment	STATUS UNKNOWN

GE padlocking handle lock for single-pole Q-Line GF breakers

OEM part number	THQGFPLD1	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Description	Handle lock - padlocking, for TQB..GF, TQC..GF, TQL..GF ground-fault breakers.	A	same as above
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	TQB...GF, TQC...GF, TQL...GF; suitable for single-pole GF breakers only; for breakers used in group-mounted panelboard construction only	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00617	TQDLPDL1	GE	padlock-attachment	LISTED IN 2012 BUYLOG;

GE padlocking device for TQDL breakers

OEM part number	TQDLPDL1	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Description	Handle lock - padlocking, TQDL (listed Rev. 9/12, list price $17.75); not listed in Rev. 1/19 table.	A	same as above
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	TQDL	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Status	Listed in 2012 BuyLog; absent from 2019 BuyLog table (status unknown)	C	S200 p. 3-29 (Rev. 9/12); inference
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, Material		

EDH-GEA-00615	TQDPLD1	GE	padlock-attachment	STATUS UNKNOWN

GE padlocking device for TQD/THQD Q-Line 225 A breakers

OEM part number	TQDPLD1	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Description	Handle lock - padlocking, TQD.	A	same as above
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	TQD (Q-Line 225 A); for breakers used in group-mounted panelboard construction only	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Cross-links	Families: A-SERIES, SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00616	TQPDLD2	GE	padlock-attachment	EUSERC APPROVED - FACT

GE padlocking device for TQD, EUSERC approved (factory installed only)

OEM part number	TQPDLD2	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Description	Handle lock - padlocking, TQD; EUSERC approved - factory installed only.	A	same as above
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	TQD	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Status	EUSERC approved - factory installed only (not a field kit)	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties, footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, Material		
Open question	*Panelboard section p.11-30 lists TQDPLD2 (not TQPDLD2) as the EUSERC factory-installed TQD lock; which spelling is correct?*		

EDH-GEA-00574	TQPLD1	General Electric	padlock-attachment	OBSOLETE (1969 RENEWAL

GE breaker handle padlocking device for TQC breakers

OEM part number	TQPLD1	A	S453, S198 oem_spec
Description	Breaker handle padlocking device for TQC breakers - TQPLD1	A	S453 GEG-13610B renewal parts list; oem_spec
	Handle lock - padlocking, TQC.	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	TQC	A	S453 oem_spec
	TQC; for group-mounted panelboard construction only	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: A-SERIES, NLAB · Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00618	TQPPL	GE	padlock-attachment	STATUS UNKNOWN

GE padlocking device for THQP breakers

OEM part number	TQPPL	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Description	Handle lock - padlocking, THQP.	A	same as above
Application	accessory	A	same as above
Installation location	Clamps on the breaker handle at the panelboard deadfront	C	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; inference
Breaker compatibility	THQP (Q-Line half-size)	A	S198 p. 6-30 (Rev. 1/19), Q-Line Accessories: Handle Locking Devices & Handle Ties; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL		
Not yet documented	Dimensions, Material, Status		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00687	**139C5491G1**	GE metal directory card holder	—	unknown
EDH-GEA-00688	**139C5491P4**	GE directory card holder	—	unknown
EDH-GEA-00680	**139C5612P3**	GE A-Series directory card	—	unknown
EDH-GEA-00681	**569B737P1**	GE A-Series replacement lock with standard key	—	unknown
EDH-GEA-00682	**569B737P2**	GE A-Series replacement lock with GE75 key	—	unknown
EDH-GEA-00683	**569B737P5**	GE additional keys for 569B737 lock	—	unknown
EDH-GEA-00684	**569B806G1**	GE circuit numbering strip 1-48	—	unknown
EDH-GEA-00685	**569B806G2**	GE circuit numbering strip 49-84 (43-84)	—	unknown
EDH-GEA-00686	**569B806G3**	GE circuit numbering strip 85-126	—	unknown
EDH-GEA-00093	**APN48**	A-Series Permanent circuit number kit, Nos 1-48	—	unknown
EDH-GEA-00094	**APN84**	A-Series Permanent circuit number kit, Nos 43-84	—	unknown
EDH-GEA-00691	**ASPCORBNTEU1**	GE A-Series Corbin lock kit	—	unknown
EDH-GEA-00690	**ASPYALE47**	GE A-Series Yale lock kit	—	unknown

EDH-GEA-00687	139C5491G1	GE	other	STATUS UNKNOWN

GE metal directory card holder

OEM part number	139C5491G1	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Metal directory card holder (A-Series field-installed kit / replacement part, order from factory).	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00688	139C5491P4	GE	other	STATUS UNKNOWN

GE directory card holder

OEM part number	139C5491P4	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Directory card holder (A-Series field-installed kit / replacement part, order from factory).	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00680	139C5612P3	GE	other	STATUS UNKNOWN

GE A-Series directory card

OEM part number	139C5612P3	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Directory card (A-Series field-installed kit / replacement part, order from factory).	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00681	569B737P1	GE	other	STATUS UNKNOWN

GE A-Series replacement lock with standard key

OEM part number	569B737P1	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Replacement lock with standard key (black, with GE monogram) (A-Series field-installed kit / replacement part, order from factory).	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00682	569B737P2	GE	other	STATUS UNKNOWN

GE A-Series replacement lock with GE75 key

OEM part number	569B737P2	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Replacement lock with GE75 key (red, no GE monogram) (A-Series field-installed kit / replacement part, order from factory).	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00683	569B737P5	GE	other	STATUS UNKNOWN

GE additional keys for 569B737 lock

OEM part number	569B737P5	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Additional keys for above lock (A-Series field-installed kit / replacement part, order from factory).	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00684	569B806G1	GE	other	STATUS UNKNOWN

GE circuit numbering strip 1-48

OEM part number	569B806G1	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Circuit numbering strips 1-48 (A-Series field-installed kit / replacement part, order from factory).	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00685	569B806G2	GE	other	STATUS UNKNOWN

GE circuit numbering strip 49-84 (43-84)

OEM part number	569B806G2	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Circuit numbering strips 49-84 (p.11-10 column page lists 43-84) (A-Series field-installed kit / replacement part, order from factory).	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00686	569B806G3	GE	other	STATUS UNKNOWN

GE circuit numbering strip 85-126

OEM part number	569B806G3	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Circuit numbering strips 85-126 (A-Series field-installed kit / replacement part, order from factory).	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00093	APN48	GE	other	STATUS UNKNOWN

A-Series Permanent circuit number kit, Nos 1-48

OEM part number	APN48	A	S143, S144 p.11-20; p.11-10; oem_spec
Description	Permanent circuit number kit, Nos 1-48 (AQ, AL, AE; AD version APN48AD)	A	same as above
	Permanent circuit number kit, Nos. 1-48.	A	S143 p. 11-10, A-Series Column - Field Installed Kits/Replacement Parts; oem_spec
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00094	APN84	GE	other	STATUS UNKNOWN

A-Series Permanent circuit number kit, Nos 43-84

OEM part number	APN84	A	S143, S144 p.11-20; p.11-10; oem_spec
Description	Permanent circuit number kit, Nos 43-84 (AQ, AL, AE; AD version APN84AD)	A	same as above
	Permanent circuit number kit, Nos. 43-84.	A	S143 p. 11-10, A-Series Column - Field Installed Kits/Replacement Parts; oem_spec
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00691	ASPCORBNTEU1	GE	other	STATUS UNKNOWN

GE A-Series Corbin lock kit

OEM part number	ASPCORBNTEU1	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Corbin lock kit (A-Series field-installed kit / replacement part, order from factory).	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00690	ASPYALE47	GE	other	STATUS UNKNOWN

GE A-Series Yale lock kit

OEM part number	ASPYALE47	A	S143 p. 11-20, A-Series Accessories - Field Installed Kits/Replacement Parts (Panelboards Parts); oem_spec
Description	Yale lock kit (A-Series field-installed kit / replacement part, order from factory).	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-PWR		
Not yet documented	Dimensions, Material, Status		

5.2 A-SERIES-COL — A-Series Column Panelboards (ALC, AQC, AEC)

FAM-GEA-003 · panelboard · aka AEC, ALC, AQC · markings: GE

Narrow column-type A-Series panels (8.62 in wide x 5.81 in deep). ALC plug-in Q-line, AQC bolt-on THQB, AEC bolt-on TEY 15-80 A.

Attribute	Value	Cl.	Sources
Main ampacity	Main lug 125-225 A; mains THQB/THHQB/TEY/SE 100 A, TQD/THQD/SF 225 A	A	S143 p.11-9; oem_spec
Dimensions	Width 8.62 in, depth 5.81 in; lengths 37.5-76.5 in	A	same as above

Key documents: S143 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;
Also fits this family (entry printed elsewhere): TQLFP1, APN48, APN84, TGL20, TGL2, EGS12

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00696	**ACHK**	GE safety catch for trough covers	—	unknown

EDH-GEA-00696	ACHK	GE	hardware-kit	STATUS UNKNOWN

GE safety catch for trough covers

OEM part number	ACHK	A	S143 p. 11-10, A-Series Column - Field Installed Kits/Replacement Parts; oem_spec
Description	Safety catch for trough covers (standard on pull box).	A	same as above
Cross-links	Families: A-SERIES-COL		
Not yet documented	Dimensions, Material, Status		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00695	**139C5612P2**	GE A-Series column panelboard directory card	—	unknown

EDH-GEA-00695	139C5612P2	GE	other	STATUS UNKNOWN

GE A-Series column panelboard directory card

OEM part number	139C5612P2	A	S143 p. 11-10, A-Series Column - Field Installed Kits/Replacement Parts; oem_spec
Description	Directory card (column panelboard parts list).	A	same as above
Cross-links	Families: A-SERIES-COL		
Not yet documented	Dimensions, Material, Status		

5.3 A-SERIES-PWR — A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')

FAM-GEA-002 · panelboard · aka A-Series II Powerpanel, AD/AE/AQ Type P & N Power Panel, ADP, AEP, AQP · markings: ABB, GE, GE Industrial Solutions

Power-panel version of the A-Series: 30 in wide x 8 in deep box, single-piece deadfront (no filler plates needed per catalog), up to 600 A branch device, staggered center-mounted SF/SG breakers. Field breaker kits ASPP6xxxx (DEH40150-DEH40158) are installed into 'Un-Specified Space' on the interior, bolting branch bases/straps to the main bus next to the crossbar and replacing a blank shield insert on the deadfront with a breaker-specific filler plate.

Attribute	Value	Cl.	Sources
Status	current as of BuyLog 07/2014	A	S143 p.11-21; oem_spec
Main ampacity	Mains 125-800 A SG/SK breakers; main lug 600-800 A	A	S143 p.11-22; oem_spec
Branch breakers accepted	AQP: QB 15-100 A, double branch TQD/SE, center-mounted SF/SG. AEP: TEY/TEYF, double branch TED/SE, center SF/SG. ADP: FB, THED, double branch TED/SE, center SF/SG	A	same as above
Dimensions	Width 30 in, depth 8 in; lengths 25.5-88.5 in	A	same as above

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, THQB / THHQB / TXQB, TQD / THQD

Key documents: S143 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S145 DEH40150 Rev.No.03 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Break; S146 DEH40151 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Break; S147 DEH40152 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Brea; S148 DEH40153 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit B; S149 DEH40154 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker K; S150 DEH40155 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Brea; S151 DEH40156 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Break; S152 DEH40157 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Brea; S153 DEH40158 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker K

Also fits this family (entry printed elsewhere): ASPAQLEBKT, 139C5720G3, 139C5720G6, 139C5720G9, TEFPLD1, TFKPLD1, SEPLD, TEDPLD2, SEFPLD2, SGPLD2, TJKPLD2, SKPLD2, TLC1PLD2, TLC4PLD2, TLD3, TFKLD1, 139C5612P3, 569B737P1, 569B737P2, 569B737P5, 569B806G1, 569B806G2, 569B806G3, 139C5491G1, 139C5491P4, NEMATRX, ASPYALE47, ASPCORBNTEU1, 139C5700G6, 139C5700G11, ASPFLUSHADJ

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00009	**ASPP6EY12D**	A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole	TEY frame per kit title A	unknown
EDH-GEA-00008	**ASPP6EY6D**	A-Series II power panel TEY three-phase circuit breaker kit, six-pole	TEY frame per kit title A	unknown
EDH-GEA-00005	**ASPP6FB6D**	A-Series II power panel FB three-phase circuit breaker kit, six-pole	FB frame per kit title A	unknown
EDH-GEA-00007	**ASPP6QB12D**	A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole	QB frame per kit title A	unknown
EDH-GEA-00006	**ASPP6QB6D**	A-Series II power panel THQB three-phase circuit breaker kit, six-pole	QB frame per kit title A	unknown
EDH-GEA-00001	**ASPP6QD6D**	A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD)	TQD frame per kit title A	unknown
EDH-GEA-00002	**ASPP6SE6D**	A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole	SE frame per kit title A	unknown
EDH-GEA-00003	**ASPP6SF3S**	A-Series II power panel SF three-phase circuit breaker kit, three-pole single	SF frame per kit title A	unknown
EDH-GEA-00004	**ASPP6SG3S**	A-Series II power panel SG three-phase circuit breaker kit, three-pole	SG frame per kit title A	unknown

EDH-GEA-00009	ASPP6EY12D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole

OEM part number	ASPP6EY12D	A	S150 p.1; oem_spec
Description	TEY three-phase circuit breaker kit, twelve-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S150 steps 4-13; oem_spec
Breaker compatibility	TEY frame per kit title	A	S150 p.1, title; oem_spec
Kit contents	(4) A & C phase 200A strap 315A7049P10; (2) center strap 315A7048P20; (2) 3X branch base 911E347P3; (6) thread rolling screw & washer 315A7034P6; (1) filler plate TEY 139C5503P129; (4) N722P16006B6	A	S150 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	A	S150 steps 4-11; oem_spec
OEM instruction document	DEH40155 Rev.No.02	A	S150 header; oem_spec
Identification features	Requires minimum 'X2, 12 inches' of unspecified space. Text step 9 also says 'ASPP6TEY12D' (typo in OEM doc).	A	S150 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5503P129 (EDH-GEA-00034)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00008	ASPP6EY6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel TEY three-phase circuit breaker kit, six-pole

OEM part number	ASPP6EY6D	A	S152 p.1; oem_spec
Description	TEY three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S152 steps 4-13; oem_spec
Breaker compatibility	TEY frame per kit title	A	S152 p.1, title; oem_spec
Kit contents	(2) A & C phase 200A strap 315A7049P10; (1) center strap 315A7048P20; (1) 3X branch base 911E347P3; (3) thread rolling screw & washer 315A7034P6; (1) filler plate TEY 139C5503P129; (4) N722P16006B6	A	S152 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	A	S152 steps 4-11; oem_spec
OEM instruction document	DEH40157 Rev.No.01	A	S152 header; oem_spec
Identification features	Crossbar gap 0.06 in	A	S152 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5503P129 (EDH-GEA-00034)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00005	ASPP6FB6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel FB three-phase circuit breaker kit, six-pole

OEM part number	ASPP6FB6D	A	S151 p.1; oem_spec
Description	FB three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S151 steps 4-13; oem_spec
Breaker compatibility	FB frame per kit title	A	S151 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSEG1 (same as SE kit); (6) spool 10093207P2; (6) spool screw 10093208P2; (6) washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5700P86; (8) screw N667P16008B6; (4) screw N80P15046B6; (1) filler plate SE/TED/FB 139C5503P77; (4) N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S151 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max; bracket 27-36 in-lb; spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler & deadfront 27-36 in-lb	A	S151 steps 4-11; oem_spec
OEM instruction document	DEH40156 Rev.No.01	A	S151 header; oem_spec
Identification features	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, SE/TED/TQD 0 in	A	S151 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Requires	139C5702ASEG1 (EDH-GEA-00011), 139C5702BSEG1 (EDH-GEA-00014), 139C5702CSEG1 (EDH-GEA-00017), 139C5700P86 (EDH-GEA-00026), 139C5503P77 (EDH-GEA-00031)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00007	ASPP6QB12D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole

OEM part number	ASPP6QB12D	A	S149 p.1; oem_spec
Description	THQB three-phase circuit breaker kit, twelve-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S149 steps 4-13; oem_spec
Breaker compatibility	QB frame per kit title	A	S149 p.1, title; oem_spec
Kit contents	(4) A & C phase 200A strap 315A7049P10; (2) center strap 315A7048P20; (2) 3X branch base 911E347P3; (6) thread rolling screw & washer 315A7034P6; (1) filler plate QB 139C5362P2; (4) N722P16006B6	A	S149 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	A	S149 steps 4-11; oem_spec
OEM instruction document	DEH40154 Rev.No.02	A	S149 header; oem_spec
Identification features	Requires minimum 'X2, 12 inches' of unspecified space. Crossbar gap 0.06 in.	A	S149 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5362P2 (EDH-GEA-00035)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00006	ASPP6QB6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel THQB three-phase circuit breaker kit, six-pole

OEM part number	ASPP6QB6D	A	S153 p.1; oem_spec
Description	THQB three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S153 steps 4-13; oem_spec
Breaker compatibility	QB frame per kit title	A	S153 p.1, title; oem_spec
Kit contents	(2) A & C phase 200A strap 315A7049P10; (1) center strap 315A7048P20; (1) 3X branch base 911E347P3; (3) thread rolling screw & washer 315A7034P6; (1) filler plate QB 139C5362P2; (4) N722P16006B6	A	S153 p.1 Table 1; oem_spec
Torque values	Straps to main bus 60 in-lb max; breaker terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	A	S153 steps 4-11; oem_spec
OEM instruction document	DEH40158 Rev.No.01	A	S153 header; oem_spec
Identification features	Crossbar gap 0.06 in; after SG 0.582, SF/TFJ, SE/TED(6P), FB/TQD(6P) 1.875 in	A	S153 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5362P2 (EDH-GEA-00035)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00001	ASPP6QD6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD)

OEM part number	ASPP6QD6D	A	S147 p.1; oem_spec
Description	TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD); for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S147 steps 4-13; oem_spec
Breaker compatibility	TQD frame per kit title	A	S147 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CQDG1; (6) spool 315A7036P19; (6) spool screw 315A7037P4; (6) spool washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5500P81; (8) bracket-to-rail screw N667P16008B6; (4) C/B-to-bracket screw N80P150046B6; (1) filler plate TQD 139C5503P64; (4) #10-32x3/8 screw N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S147 p.1 Table 1; oem_spec
Torque values	Branch bases to main bus 60 in-lb max; bracket to rail 27-36 in-lb; 1/4-28 x 1-3/8 spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler plate & deadfront 27-36 in-lb	A	S147 steps 4-11; oem_spec
OEM instruction document	DEH40152 Rev.No.02	A	S147 header; oem_spec
Identification features	Crossbar gap 0.0525 in; after SG 0.582 in, after SF/TFJ 1.875 in	A	S147 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Requires	139C5702AQDG1 (EDH-GEA-00010), 139C5702BQDG1 (EDH-GEA-00013), 139C5702CQDG1 (EDH-GEA-00016), 139C5500P81 (EDH-GEA-00022), 139C5503P64 (EDH-GEA-00030)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00002	ASPP6SE6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole

OEM part number	ASPP6SE6D	A	S148 p.1; oem_spec
Description	SE/TED three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S148 steps 4-13; oem_spec
Breaker compatibility	SE frame per kit title	A	S148 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSEG1; (6) spool 315A7036P18; (6) spool screw 315A7037P3; (6) washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5500P82; (8) screw N667P16008B6; (4) screw N80P150046B6; (1) filler plate SE/TED/FB 139C5503P77; (4) N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S148 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max; bracket 27-36 in-lb; spool screws 50-70 in-lb; breaker to bracket 18-22 in-lb; filler/deadfront 27-36 in-lb	A	S148 steps 4-11; oem_spec
OEM instruction document	DEH40153 Rev.No.02	A	S148 header; oem_spec
Identification features	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, TQD 0 in	A	S148 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	139C5702ASEG1 (EDH-GEA-00011), 139C5702BSEG1 (EDH-GEA-00014), 139C5702CSEG1 (EDH-GEA-00017), 139C5500P82 (EDH-GEA-00023), 139C5503P77 (EDH-GEA-00031)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00003	ASPP6SF3S	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SF three-phase circuit breaker kit, three-pole single

OEM part number	ASPP6SF3S	A	S146 p.1; oem_spec
Description	SF three-phase circuit breaker kit, three-pole single; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S146 steps 4-13; oem_spec
Breaker compatibility	SF frame per kit title	A	S146 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSFG1; (3) spool 315A7036P20; (3) spool screw 315A7037P1; (3) washer 75A105503P111; (3) bus screw 315A7034P6; (1) 3P bracket 139C5500P84; (2) screw N37P16060B6; (2) cup washer N405P40B6; (1) filler plate SF/TFJ 139C5503P90; (4) N722P16006B6	A	S146 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max (left) / 50-70 in-lb (right side text); bracket 27-36 in-lb; spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler 27-36 in-lb	A	S146 steps 4-11; oem_spec
OEM instruction document	DEH40151 Rev.No.02	A	S146 header; oem_spec
Identification features	Crossbar gap 0.061 in; after SG 0.582 in. Filler plate is flipped for right-side mounting.	A	S146 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	139C5702ASFG1 (EDH-GEA-00012), 139C5702BSFG1 (EDH-GEA-00015), 139C5702CSFG1 (EDH-GEA-00018), 139C5500P84 (EDH-GEA-00025), 139C5503P90 (EDH-GEA-00032)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00004	ASPP6SG3S	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SG three-phase circuit breaker kit, three-pole

OEM part number	ASPP6SG3S	A	S145 p.1; oem_spec
Description	SG three-phase circuit breaker kit, three-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S145 steps 4-13; oem_spec
Breaker compatibility	SG frame per kit title	A	S145 p.1, title; oem_spec
Kit contents	(3) straps A/B/C 315A7046P7/P8/P9; (3) spool 315A7036P22; (3) spool screw 315A7037P5; (3) washer 75A105503P111; (3) bus screw 315A7034P7; (1) 3P bracket 139C5500P83; (2) screw N667P16008B6; (3) xmas tree 315A7077P1; (1) filler plate SG/TFG 139C5503P103; (4) N722P16006B6; (1) bracket insulation 10086929P11; insulators B/A/C 10086929P5/P7/P6; (2) breaker mounting screws N37P16060B6; (2) spring lock washer #12 N405P40B6	A	S145 p.1 Table 1; oem_spec
Torque values	Straps to main bus 60 in-lb max; bracket 27-36 in-lb; spool screws 50-70 lb-in; breaker to bracket 18-22 lb-in; filler/deadfront 27-36 lb-in	A	S145 steps 4-11; oem_spec
OEM instruction document	DEH40150 Rev.No.03	A	S145 header; oem_spec
Identification features	Crossbar gap 0.002 in	A	S145 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	315A7046P7 (EDH-GEA-00019), 315A7046P8 (EDH-GEA-00020), 315A7046P9 (EDH-GEA-00021), 139C5500P83 (EDH-GEA-00024), 139C5503P103 (EDH-GEA-00033)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00010	**139C5702AQDG1**	Branch base, A phase, TQD (A-Series II)	—	unknown
EDH-GEA-00011	**139C5702ASEG1**	Branch base, A phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00012	**139C5702ASFG1**	Branch base, A phase, SF (A-Series II)	—	unknown
EDH-GEA-00013	**139C5702BQDG1**	Branch base, B phase, TQD (A-Series II)	—	unknown
EDH-GEA-00014	**139C5702BSEG1**	Branch base, B phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00015	**139C5702BSFG1**	Branch base, B phase, SF (A-Series II)	—	unknown
EDH-GEA-00016	**139C5702CQDG1**	Branch base, C phase, TQD (A-Series II)	—	unknown
EDH-GEA-00017	**139C5702CSEG1**	Branch base, C phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00018	**139C5702CSFG1**	Branch base, C phase, SF (A-Series II)	—	unknown
EDH-GEA-00019	**315A7046P7**	SG breaker strap, A phase (A-Series II)	—	unknown
EDH-GEA-00020	**315A7046P8**	SG breaker strap, B phase (A-Series II)	—	unknown
EDH-GEA-00021	**315A7046P9**	SG breaker strap, C phase (A-Series II)	—	unknown
EDH-GEA-00028	**315A7048P20**	Center (B phase) strap (THQB/TEY, A-Series II)	—	unknown
EDH-GEA-00027	**315A7049P10**	A & C phase 200A strap (THQB/TEY, A-Series II)	—	unknown

EDH-GEA-00010	139C5702AQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, TQD (A-Series II)

OEM part number	139C5702AQDG1	A	S147 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S147 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S147 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00011	139C5702ASEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, SE/TED/FB (A-Series II)

OEM part number	139C5702ASEG1	A	S148, S151 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar, 60 in-lb max	A	S148, S151 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S148, S151 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00012	139C5702ASFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, SF (A-Series II)

OEM part number	139C5702ASFG1	A	S146 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar with bus screw 315A7034P6	A	S146 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S146 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00013	139C5702BQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, TQD (A-Series II)

OEM part number	139C5702BQDG1	A	S147 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S147 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S147 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00014	139C5702BSEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, SE/TED/FB (A-Series II)

OEM part number	139C5702BSEG1	A	S148, S151 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar, 60 in-lb max	A	S148, S151 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S148, S151 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00015	139C5702BSFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, SF (A-Series II)

OEM part number	139C5702BSFG1	A	S146 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar with bus screw 315A7034P6	A	S146 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S146 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00016	139C5702CQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, TQD (A-Series II)

OEM part number	139C5702CQDG1	A	S147 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S147 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S147 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00017	139C5702CSEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, SE/TED/FB (A-Series II)

OEM part number	139C5702CSEG1	A	S148, S151 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar, 60 in-lb max	A	S148, S151 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S148, S151 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00018	139C5702CSFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, SF (A-Series II)

OEM part number	139C5702CSFG1	A	S146 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar with bus screw 315A7034P6	A	S146 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S146 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00019	315A7046P7	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, A phase (A-Series II)

OEM part number	315A7046P7	A	S145 Table 1; oem_spec
Description	STRAP FOR A PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S145 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S145 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00020	315A7046P8	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, B phase (A-Series II)

OEM part number	315A7046P8	A	S145 Table 1; oem_spec
Description	STRAP FOR B PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S145 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S145 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00021	315A7046P9	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, C phase (A-Series II)

OEM part number	315A7046P9	A	S145 Table 1; oem_spec
Description	STRAP FOR C PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S145 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S145 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00028	315A7048P20	GE	connector-strap	STATUS UNKNOWN

Center (B phase) strap (THQB/TEY, A-Series II)

OEM part number	315A7048P20	A	S149, S150, S152, S153 Table 1; oem_spec
Description	STRAP, CENTER	A	same as above
Application	branch	A	same as above
Installation location	B phase main bus; located using 3X branch base placed against crossbar	A	S149, S150, S152, S153 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S149, S150, S152, S153 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00027	315A7049P10	GE	connector-strap	STATUS UNKNOWN

A & C phase 200A strap (THQB/TEY, A-Series II)

OEM part number	315A7049P10	A	S149, S150, S152, S153 Table 1; oem_spec
Description	A & C PHASE 200A STRAP	A	same as above
Application	branch	A	same as above
Installation location	Screwed to main bus with thread rolling screw & washer 315A7034P6, 60 in-lb max	A	S149, S150, S152, S153 installation steps; oem_spec
Current rating	200 A (per description)	A	S149 Table 1; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S149, S150, S152, S153 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00022	**139C5500P81**	3P breaker support bracket (ASPP6QD6D)	—	unknown
EDH-GEA-00023	**139C5500P82**	3P breaker support bracket (ASPP6SE6D)	—	unknown
EDH-GEA-00024	**139C5500P83**	3P breaker support bracket (ASPP6SG3S)	—	unknown
EDH-GEA-00025	**139C5500P84**	3P breaker support bracket (ASPP6SF3S)	—	unknown
EDH-GEA-00026	**139C5700P86**	3P breaker support bracket (ASPP6FB6D)	—	unknown

EDH-GEA-00022	139C5500P81	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6QD6D)

OEM part number	139C5500P81	A	S147 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S147 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S147 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00023	139C5500P82	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SE6D)

OEM part number	139C5500P82	A	S148 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S148 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D	A	S148 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00024	139C5500P83	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SG3S)

OEM part number	139C5500P83	A	S145 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S145 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S145 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00025	139C5500P84	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SF3S)

OEM part number	139C5500P84	A	S146 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S146 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S146 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00026	139C5700P86	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6FB6D)

OEM part number	139C5700P86	A	S151 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S151 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6FB6D	A	S151 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00029	**911E347P3**	3X branch base (THQB/TEY, A-Series II)	—	unknown

EDH-GEA-00029 **911E347P3** GE insulator **STATUS UNKNOWN**

3X branch base (THQB/TEY, A-Series II)

OEM part number	911E347P3	A	S149, S150, S152, S153 Table 1; oem_spec
Description	3X BRANCH BASE; load end of breaker snaps into base lancing slot	A	same as above
Application	branch	A	same as above
Installation location	Interior, adjacent to crossbar; supports load end of THQB/TEY	A	S149, S150, S152, S153 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S149, S150, S152, S153 Table 1; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in per GE convention)	B	S149, S143 Table 1; BuyLog p.11-40; inference
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00035	**139C5362P2**	Deadfront filler plate (shield insert) - QB (A-Series II power panel)	—	unknown
EDH-GEA-00033	**139C5503P103**	Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)	—	unknown
EDH-GEA-00034	**139C5503P129**	Deadfront filler plate (shield insert) - TEY (A-Series II power panel)	—	unknown
EDH-GEA-00030	**139C5503P64**	Deadfront filler plate (shield insert) - TQD (A-Series II power panel)	—	unknown
EDH-GEA-00031	**139C5503P77**	Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)	—	unknown
EDH-GEA-00032	**139C5503P90**	Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)	—	unknown

EDH-GEA-00035 **139C5362P2** GE filler-plate **STATUS UNKNOWN**

Deadfront filler plate (shield insert) - QB (A-Series II power panel)

OEM part number	139C5362P2	A	S149, S153 Table 1; oem_spec
Description	FILLER PLATE, QB	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S149, S153 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D	A	S149, S153 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S149 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00033	139C5503P103	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)

OEM part number	139C5503P103	A	S145 Table 1; oem_spec
Description	FILLER PLATE, SG/TFG	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S145 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S145 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00034	139C5503P129	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - TEY (A-Series II power panel)

OEM part number	139C5503P129	A	S150, S152 Table 1; oem_spec
Description	FILLER PLATE, TEY	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S150, S152 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6EY6D, ASPP6EY12D	A	S150, S152 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S150 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00030	139C5503P64	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - TQD (A-Series II power panel)

OEM part number	139C5503P64	A	S147 Table 1; oem_spec
Description	FILLER PLATE, TQD	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S147 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S147 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00031	139C5503P77	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)

OEM part number	139C5503P77	A	S148, S151 Table 1; oem_spec
Description	FILLER PLATE, SE/TED/FB	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S148, S151 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S148, S151 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S148 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00032	139C5503P90	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)

OEM part number	139C5503P90	A	S146 Table 1; oem_spec
Description	FILLER PLATE, SF/TFJ	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S146 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S146 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00637	**TLC1PLD1**	GE standard padlocking device for THLC1	THLC1 A	Listed Rev. 9/12; not listed in Rev. 1/19 table
EDH-GEA-00638	**TLC4PLD1**	GE standard padlocking device for THLC2, THLC4, TLB4	THLC2, THLC4, TLB4 A	Listed Rev. 9/12; not listed in Rev. 1/19 table

EDH-GEA-00637	TLC1PLD1	GE	padlock-attachment	LISTED REV. 9/12; NOT

GE standard padlocking device for THLC1

OEM part number	TLC1PLD1	A	S200 Section 3 Rev. 9/12, External Accessories - Standard Padlocking Devices; oem_spec
Description	Standard padlocking device for current-limiting THLC breakers.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	THLC1	A	same as above
Status	Listed Rev. 9/12; not listed in Rev. 1/19 table	C	S200 Section 3 Rev. 9/12; inference
Cross-links	Families: A-SERIES-PWR · Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Material		

EDH-GEA-00638	TLC4PLD1	GE	padlock-attachment	LISTED REV. 9/12; NOT

GE standard padlocking device for THLC2, THLC4, TLB4

OEM part number	TLC4PLD1	A	S200 Section 3 Rev. 9/12, External Accessories - Standard Padlocking Devices; oem_spec
Description	Standard padlocking device for current-limiting THLC breakers.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	THLC2, THLC4, TLB4	A	same as above
Status	Listed Rev. 9/12; not listed in Rev. 1/19 table	C	S200 Section 3 Rev. 9/12; inference
Cross-links	Families: A-SERIES-PWR · Breakers: F225 line (TFJ, TFK, THFK, TFC), J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Material		

5.4 CCB-QMR — Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)

FAM-GEA-006 · panelboard · aka CCB, CDP?, Convertible Circuit Breaker panelboard, NCB, QMR · markings: GE, General Electric, Trumbull

Older GE power panelboards. Breakers mount with copper strap kits suffixed DPK (dual/twin mount) or SPK (single mount) usable on Cu or Al main bus; device product number + suffix ordered as a unit. Replacement CCB fronts CBAxxxxS/F and boxes DASW/DACB; filler plates CCBFPx/QMRFPx. QMR used THFP fusible switches. CDP is named in the batch scope but no CDP-specific data was found.

Evidence record for the existing GE CCB/QMR family: earliest dated GE mention of CCB (1955) and the 1951 Trumbull convertible circuit breaker panelboard description (sectionalized, breakers on steel back plates, removable trip units above 100 A frame). Dealer data shows CCB DPK/SPK strap kits also listed for AV1/AV2 switchboards and QMR.

Attribute	Value	Cl.	Sources
Status	Renewal parts still listed 2014; QMR fusible switches 'Limited availability. Obsolete when inventory depleted.'	A	S143 p.11-49 to 11-51; oem_spec
Era of manufacture	Types NCB and CCB listed as GE power distribution panelboards in March 1955; 1951 Trumbull 'Convertible Circuit Breaker Panelboards' (likely origin of the CCB letters) (CCB = 'Convertible Circuit Breaker' is an inference from the 1951 catalog heading)	B	S436, S452 oem_spec
Voltage rating	1951 Convertible CB panelboards: max 250 V DC, 600 V AC; mains 1200 A lugs or 600 A breaker; branches 15-600 A 1/2/3-pole	A	S452 GE Supply 1951 p.446; oem_spec
Kit family	Dealer 'Panel Type' for TB1DPK, TB4SBK, TB8SPK, TJ6SPK, THJV6DPK, TP8SPK, TED1DPK2: 'AV1, AV2, CCB, QMR'	C	S444 surplus_listing

Breaker families associated: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV), Spectra SF (SFHA/SFLA/SFPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TFJ / TFK / THFK / TFL, TJD / TJJ / TJK / THJK, TKM / THKM, TQD / THQD

Key documents: S143 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S436 sim_ecm_1955-03_54_3 Electrical Construction and Maintenance, Vol 54 No 3, March 1955 - General Electric 'Syste; S444 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it; S452 wiringmaterialsp00unse Wiring Materials, Power Apparatus - General Electric Supply Corporation catalog (copyright

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00043	**BSGDGE**	Aftermarket bus connection kit BSGDGE (seller cross-ref to GEA SG6DPK)	mounts two SG-frame Spectra breakers, 600 A max C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00037	**BTEDGE**	Aftermarket bus connection kit BTEDGE (seller cross-ref to GEA TED1DPK)	mounts two 150 A max E150 frame breakers C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00038	**BTELGE**	Aftermarket bus connection kit BTELGE (seller cross-ref to GEA TEL1DPK)	mounts two 150 A max TEL frame breakers C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00040	**BTFKGE**	Aftermarket bus connection kit BTFKGE (seller cross-ref to GEA TF2DPK)	mounts two 250 A max F225 frame breakers C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00041	**BTJK4GE**	Aftermarket bus connection kit BTJK4GE (seller cross-ref to GEA TJ4DPK)	mounts two 400 A max J400 frame breakers C	current aftermarket item; listing label 'GE/ABB Aftermarket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00042	**BTJK6GE**	Aftermarket bus connection kit BTJK6GE (seller cross-ref to GEA TJ6DPK)	mounts two 600 A max J600 frame breakers C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00045	**BTK12GE**	Aftermarket bus connection kit BTK12GE (seller cross-ref to GEA TK12SPK)	mounts one TKM-frame breaker, 1200 A max C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00044	**BTK8GE**	Aftermarket bus connection kit BTK8GE (seller cross-ref to GEA TK8SPK)	mounts one TKM-frame breaker, 800 A max C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00039	**BTQDGE**	Aftermarket bus connection kit BTQDGE (seller cross-ref to GEA TQ2DPK)	mounts two 225 A max TQD frame breakers C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-GEA-00262	**SF2DPK**	CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)	SFH/SFL A	unknown
EDH-GEA-00604	**SG6DPK**	GE SG-frame twin mounting kit, 600 A (dealer label 'AV')	SGDA, SGHA, SGLA, SGPA C	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00266	**SK12SPK**	CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)	SKH12 A	unknown
EDH-GEA-00265	**SK8SPK**	CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)	SKH8 A	unknown
EDH-GEA-00591	**TB1DPK**	GE CCB panelboard twin mounting hardware, TB1, 15-150 A	TB1 C	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00954	**TB1SPK**	GE CCB panelboard copper strap mounting kit TB1SPK (TB1, 100 A, single)	TB1 A	unknown
EDH-GEA-00593	**TB4SBK**	GE hardware kit for TB4 frame (single)	TB4 C	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00592	**TB4SPK**	GE CCB panelboard single mounting kit, TB4, 125-400 A	TB4 C	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00955	**TB6SPK**	GE CCB panelboard copper strap mounting kit TB6SPK (TB6, 600 A, single)	TB6 A	unknown
EDH-GEA-00594	**TB8SPK**	GE CCB panelboard single mounting kit, TB6/TB8, 600-800 A	TB6, TB8 C	Listed in ABB eCatalog (2026-10-21)
EDH-GEA-00256	**TED1DPK**	CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)	TEB/TED A	unknown
EDH-GEA-00598	**TED1DPK2**	GE CCB panelboard twin mounting hardware, E-frame 150 A (variant 2)	TEB, TED, TEC, THED, SEDA, SEHA, SELA, SEPA C	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00261	**TEL1DPK**	CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)	TEL A	unknown
EDH-GEA-00257	**TF2DPK**	CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)	TFJ/TFK/TFL A	unknown
EDH-GEA-00964	**THFP22SPK**	GE QMR panelboard copper mounting kit THFP22SPK (THFP fusible switch, 30/60 A, single)	THFP fusible switch 30/60 A 240 V A	unknown
EDH-GEA-00961	**THFP62DPK**	GE QMR panelboard copper mounting kit THFP62DPK (THFP fusible switch, 30-60 A, dual)	THFP fusible switch 30-60 A 240 & 600 V A	unknown
EDH-GEA-00965	**THFP62SPK**	GE QMR panelboard copper mounting kit THFP62SPK (THFP fusible switch, 30/60/100 A, single)	THFP fusible switch 30/60/100 A 240 & 600 V A	unknown
EDH-GEA-00600	**THFP63DPK**	GE QMR panelboard twin mounting hardware for THFP fusible switch, 100 A	THFP fusible switch C	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00963	**THFP63DPKC**	GE QMR panelboard copper mounting kit THFP63DPKC (THFP fusible switch, 100-30/60 A, dual)	THFP fusible switch 100-30/60 A 600 V A	unknown
EDH-GEA-00962	**THFP63DPKJ**	GE QMR panelboard copper mounting kit THFP63DPKJ (THFP fusible switch, 100 A, dual)	THFP fusible switch 100 A 600 V A	unknown
EDH-GEA-00601	**THFP63SPK**	GE QMR panelboard single mounting hardware for THFP fusible switch, 100 A	THFP fusible switch C	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00602	**THFP64SPK**	GE QMR panelboard single mounting hardware for THFP fusible switch, 200 A	THFP fusible switch C	Discontinued OEM item traded new-surplus / recertified by de

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00603	**THFP65SPK**	GE QMR panelboard single mounting hardware for THFP fusible switch, 400 A	THFP fusible switch **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00966	**THFP66SPK**	GE QMR panelboard copper mounting kit THFP66SPK (THFP fusible switch, 600 A, single)	THFP fusible switch 600 A 240 & 600 V **A**	unknown
EDH-GEA-00967	**THFP67SPK**	GE QMR panelboard copper mounting kit THFP67SPK (THFP fusible switch, 1200 A, single)	THFP fusible switch 1200 A 240 & 600 V **A**	unknown
EDH-GEA-00597	**THJV6DPK**	GE CCB panelboard mounting hardware for THJV (listed 'twin mounted')	THJV **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00953	**THLC1DPK**	GE CCB panelboard copper strap mounting kit THLC1DPK (TLB1/THLC1, 150 A, dual)	TLB1/THLC1 **A**	unknown
EDH-GEA-00958	**THLC1SPK**	GE CCB panelboard copper strap mounting kit THLC1SPK (TLB1, 150 A, single)	TLB1 **A**	unknown
EDH-GEA-00959	**THLC4SPK**	GE CCB panelboard copper strap mounting kit THLC4SPK (TLB4, 400 A, single)	TLB4 **A**	unknown
EDH-GEA-00259	**TJ4DPK**	CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)	TJD/TJJ/TJK **A**	unknown
EDH-GEA-00260	**TJ6DPK**	CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)	TJK **A**	unknown
EDH-GEA-00596	**TJ6SPK**	GE CCB panelboard single-mounted strap kit, 600 A J-frame	TJD, TJJ, TJK, THJK, TJ4V, TJL4V **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00957	**TJ9SPK**	GE CCB panelboard copper strap mounting kit TJ9SPK (TJL1-6, S / TJH1-6S, 600 A, single)	TJL1-6, S / TJH1-6S **A**	unknown
EDH-GEA-00264	**TK12SPK**	CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)	TKM12/THKM12 **A**	unknown
EDH-GEA-00263	**TK8SPK**	CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)	TKM8/THKM8 **A**	unknown
EDH-GEA-00599	**TK9SPK**	GE QMR panel mount for TKL/TKH breakers, 1200 A 600 V	TKL, TKH **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00956	**TKL12SPK**	GE CCB panelboard copper strap mounting kit TKL12SPK (TK4V/THK4V/TKL4V, 1200 A, single)	TK4V/THK4V/TKL4V **A**	unknown
EDH-GEA-00595	**TP8SPK**	GE mounting hardware for Tri-Pac 800 A breaker (CCB/AV)	TB6, TB8 (spec block) / Tri-Pac 800 A (title) **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00258	**TQ2DPK**	CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)	TQD **A**	unknown

EDH-OTH-00043	**BSGDGE**	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	**CURRENT AFTERMARKET IT**

Aftermarket bus connection kit BSGDGE (seller cross-ref to GEA SG6DPK)

OEM part number	BSGDGE (Breaker King catalog/model number)	**C**	S627 distributor
Alternate / superseded numbers	SG6DPK [equivalent] (seller cross-reference: 'Kit SGD6K; Replaces OEM SG6DPK')	**C**	same as above
	SGD6K [alias] (seller/PCS kit number quoted in listing)	**C**	same as above
Description	Bus connection hardware for GE CCB/AV1 panelboards; mounts two SG-frame Spectra breakers, 600 A max (seller listing text (may be truncated))	**C**	same as above
Breaker compatibility	mounts two SG-frame Spectra breakers, 600 A max (seller claim; compatibility from distributor only)	**C**	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	**C**	same as above
Replacement / successor	Seller states it replaces OEM SG6DPK ('Kit SGD6K; Replaces OEM SG6DPK') (seller claim; not OEM-verified; no listing/UL statement on page)	**C**	same as above
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00037	BTEDGE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BTEDGE (seller cross-ref to GEA TED1DPK)

OEM part number	BTEDGE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	TED1DPK [equivalent] (seller cross-reference: 'Kit # TED1K replaces OEM TED1DPK')	C	same as above
	TED1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for GE CCB/AV1 panelboards; mounts two 150 A max E150 frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two 150 A max E150 frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM TED1DPK ('Kit # TED1K replaces OEM TED1DPK') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00038	BTELGE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BTELGE (seller cross-ref to GEA TEL1DPK)

OEM part number	BTELGE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	TEL1DPK [equivalent] (seller cross-reference: 'Kit # TEL1K replaces OEM TEL1DPK')	C	same as above
	TEL1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for GE CCB/AV1 panelboards; mounts two 150 A max TEL frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two 150 A max TEL frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM TEL1DPK ('Kit # TEL1K replaces OEM TEL1DPK') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00040	BTFKGE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BTFKGE (seller cross-ref to GEA TF2DPK)

OEM part number	BTFKGE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	TF2DPK [equivalent] (seller cross-reference: 'Kit # TFK1K replaces OEM TF2DPK')	C	same as above
	TFK1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for GE CCB/AV1 panelboards; mounts two 250 A max F225 frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two 250 A max F225 frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM TF2DPK ('Kit # TFK1K replaces OEM TF2DPK') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00041	BTJK4GE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BTJK4GE (seller cross-ref to GEA TJ4DPK)

OEM part number	BTJK4GE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	TJ4DPK [equivalent] (seller cross-reference: 'Kit # TJK4K replaces OEM TJ4DPK')	C	same as above
	TJK4K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for GE CCB/AV1 panelboards; mounts two 400 A max J400 frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two 400 A max J400 frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM TJ4DPK ('Kit # TJK4K replaces OEM TJ4DPK') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00042	BTJK6GE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BTJK6GE (seller cross-ref to GEA TJ6DPK)

OEM part number	BTJK6GE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	TJ6DPK [equivalent] (seller cross-reference: 'Kit # TJK6K replaces OEM TJ6DPK')	C	same as above
	TJK6K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for GE CCB/AV1 panelboards; mounts two 600 A max J600 frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two 600 A max J600 frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM TJ6DPK ('Kit # TJK6K replaces OEM TJ6DPK') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00045	BTK12GE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BTK12GE (seller cross-ref to GEA TK12SPK)

OEM part number	BTK12GE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	TK12SPK [equivalent] (seller cross-reference: 'Kit TKM12K; Replaces OEM TK12SPK')	C	same as above
	TKM12K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for GE CCB/AV1 panelboards; mounts one TKM-frame breaker, 1200 A max (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one TKM-frame breaker, 1200 A max (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM TK12SPK ('Kit TKM12K; Replaces OEM TK12SPK') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00044	BTK8GE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BTK8GE (seller cross-ref to GEA TK8SPK)

OEM part number	BTK8GE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	TK8SPK [equivalent] (seller cross-reference: 'Kit TKM8K; Replaces OEM TK8SPK')	C	same as above
	TKM8K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for GE CCB/AV1 panelboards; mounts one TKM-frame breaker, 800 A max (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one TKM-frame breaker, 800 A max (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM TK8SPK ('Kit TKM8K; Replaces OEM TK8SPK') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00039	BTQDGE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BTQDGE (seller cross-ref to GEA TQ2DPK)

OEM part number	BTQDGE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	TQ2DPK [equivalent] (seller cross-reference: 'Kit # TQD1K replaces OEM TQ2DPK')	C	same as above
	TQD1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus hardware for GE CCB/AV1 panelboards; mounts two 225 A max TQD frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two 225 A max TQD frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM TQ2DPK ('Kit # TQD1K replaces OEM TQ2DPK') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-GEA-00262	SF2DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)

OEM part number	SF2DPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S143, S650 p.11-49; oem_spec
Alternate / superseded numbers	SF2DPK1,2 (as printed with footnotes 1 and 2 fused)	A	S650 alias; 9-116; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, SFH/SFL, 225 A kit. Footnotes: if mounting hardware exists must order SFCARE for additional insulators; 225 A max	A	S143 p.11-49; oem_spec
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	SFH/SFL	A	same as above
	SFH/SFL, 225 A maximum (footnote 2); if mounting hardware exists order SFCARE additional insulators (footnote 1)	A	S650 9-116; oem_spec
Current rating	225 A	A	S143 p.11-49; oem_spec
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00604	SG6DPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE SG-frame twin mounting kit, 600 A (dealer label 'AV')

OEM part number	SG6DPK	C	S444 surplus_listing
Description	AV	C	same as above
Application	branch (twin)	C	same as above
Installation location	Dealer spec block 'APNB-APN' (Spectra) vs title 'AV' - conflicting	C	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Aftermarket / reproduction	Breaker King offers BSGDGE (kit # SGD6K) as a replacement ('Kit SGD6K; Replaces OEM SG6DPK'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00266	SK12SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)

OEM part number	SK12SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S143, S650 p.11-49; oem_spec
Alternate / superseded numbers	SK12SPK3 (as printed with footnote(s) fused)	A	S650 alias; 9-116; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, SKH12, 1200 A kit. Deep mounted interior required	A	S143 p.11-49; oem_spec
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
	Footnote 3: deep mounted interior is required	A	S650 9-116; oem_spec
Breaker compatibility	SKH12	A	S143 p.11-49; oem_spec
Current rating	1200 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00265	SK8SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)

OEM part number	SK8SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S143, S650 p.11-49; oem_spec
Alternate / superseded numbers	SK8SPK3 (as printed with footnote(s) fused)	A	S650 alias; 9-116; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, SKH8, 800 A kit. Deep mounted interior required	A	S143 p.11-49; oem_spec
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
	Footnote 3: deep mounted interior is required	A	S650 9-116; oem_spec
Breaker compatibility	SKH8	A	S143 p.11-49; oem_spec
Current rating	800 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00591	TB1DPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE CCB panelboard twin mounting hardware, TB1, 15-150 A

OEM part number	TB1DPK	C	S444 surplus_listing
Description	Mounting hardware/CCB panelboard - twin mounted 15-150 A	C	same as above
Application	branch (twin)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	TB1	C	same as above
Current rating	100 A max (spec) / 15-150 A (title)	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00954	TB1SPK	GE	branch-connector-kit	STATUS UNKNOWN

GE CCB panelboard copper strap mounting kit TB1SPK (TB1, 100 A, single)

OEM part number	TB1SPK	A	S650 9-116; oem_spec
Alternate / superseded numbers	TB1SPK3 [alias] (as printed with footnote fused (3 = deep mounted interior required; 4 = 7X/8X space note))	A	same as above
Description	CCB panelboard mounting hardware - copper straps, single mounted; deep mounted interior required, for use on Cu or Al main bus; TB1 breaker, 100 A kit rating	A	same as above
Application	CCB/QMR panelboards; per 2008 suffix table the DPK/SPK hardware suffixes also apply to "Switchboards"	A	S650 9-116; 9-117 "Device and Hardware Suffix Selection"; oem_spec
Breaker compatibility	TB1	A	S650 9-116; oem_spec
Current rating	100 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Kit contents, Torque values		

EDH-GEA-00593	TB4SBK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE hardware kit for TB4 frame (single)

OEM part number	TB4SBK	C	S444 surplus_listing
Description	GEN; Hardware Kit for TB4 Frame	C	same as above
Application	branch (single)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	TB4	C	same as above
Current rating	400 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00592	TB4SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE CCB panelboard single mounting kit, TB4, 125-400 A

OEM part number	TB4SPK	C	S444 surplus_listing
Description	Mounting hardware/CCB panelboard - single 125-400A TB4 mounting kit	C	same as above
Application	branch (single)	C	same as above
Installation location	AV Line (spec block)	C	same as above
Breaker compatibility	TB4	C	same as above
Current rating	400 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00955	TB6SPK	GE	branch-connector-kit	STATUS UNKNOWN

GE CCB panelboard copper strap mounting kit TB6SPK (TB6, 600 A, single)

OEM part number	TB6SPK	A	S650 9-116; oem_spec
Alternate / superseded numbers	TB6SPK3 [alias] (as printed with footnote fused (3 = deep mounted interior required; 4 = 7X/8X space note))	A	same as above
Description	CCB panelboard mounting hardware - copper straps, single mounted; deep mounted interior required, for use on Cu or Al main bus; TB6 breaker, 600 A kit rating	A	same as above
Application	CCB/QMR panelboards; per 2008 suffix table the DPK/SPK hardware suffixes also apply to "Switchboards"	A	S650 9-116; 9-117 "Device and Hardware Suffix Selection"; oem_spec
Breaker compatibility	TB6	A	S650 9-116; oem_spec
Current rating	600 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Kit contents, Torque values		

EDH-GEA-00594	TB8SPK	General Electric	branch-connector-kit	LISTED IN ABB ECATALOG

GE CCB panelboard single mounting kit, TB6/TB8, 600-800 A

OEM part number	TB8SPK	A	S444, S650 9-116; oem_spec
Alternate / superseded numbers	TB8SPK3 (as printed with footnote(s) fused)	A	S650 alias; 9-116; oem_spec
Description	ABB eCatalog: "MOUNTG HARDWRE/CCB PANELBRD-SINGLE" (UPC 783164209235); Spectra Power - Merchand. Old Style Pwr Pk Units	A	S426 oem_spec
	Mounting hardware/CCB panelboard - single 600-800A	C	S444 surplus_listing
Application	Footnote 3: deep mounted interior is required	A	S650 9-116; oem_spec
	branch (single)	C	S444 surplus_listing
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	TB6, TB8	C	same as above
Current rating	800 A	C	same as above
Status	Listed in ABB eCatalog (2026-10-21)	A	S426 oem_spec
	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444 surplus_listing
Cross-links	Families: CCB-QMR, AV-LINE · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00256	TED1DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)

OEM part number	TED1DPK	A	S143 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TEB/TED, 150 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TEB/TED	A	same as above
Current rating	150 A	A	same as above
Material	Copper straps	A	same as above
Aftermarket / reproduction	Breaker King offers BTEDGE (kit # TED1K) as a replacement ('Kit # TED1K replaces OEM TED1DPK'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: CCB-QMR · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00598	TED1DPK2	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE CCB panelboard twin mounting hardware, E-frame 150 A (variant 2)

OEM part number	TED1DPK2	C	S444 surplus_listing
Description	MTG HRDWRE/CCB panelboard, twin mounted	C	same as above
Application	branch (twin)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	TEB, TED, TEC, THED, SEDA, SEHA, SELA, SEPA	C	same as above
Current rating	150 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*How does TED1DPK2 differ from TED1DPK (already catalogued)?*		

EDH-GEA-00261	TEL1DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)

OEM part number	TEL1DPK	A	S143 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TEL, 150 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TEL	A	same as above
Current rating	150 A	A	same as above
Material	Copper straps	A	same as above
Aftermarket / reproduction	Breaker King offers BTELGE (kit # TEL1K) as a replacement ('Kit # TEL1K replaces OEM TEL1DPK'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: CCB-QMR · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00257	TF2DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)

OEM part number	TF2DPK	A	S143 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TFJ/TFK/TFL, 225 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TFJ/TFK/TFL	A	same as above
Current rating	225 A	A	same as above
Material	Copper straps	A	same as above
Aftermarket / reproduction	Breaker King offers BTFKGE (kit # TFK1K) as a replacement ('Kit # TFK1K replaces OEM TF2DPK'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: CCB-QMR · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00964	THFP22SPK	GE	branch-connector-kit	STATUS UNKNOWN

GE QMR panelboard copper mounting kit THFP22SPK (THFP fusible switch, 30/60 A, single)

OEM part number	THFP22SPK	A	S650 9-117; oem_spec
Description	QMR mounting hardware kit, copper, for use with Cu or Al main bus, single mounted; THFP fusible switch 30/60 A, 240 V	A	same as above
Breaker compatibility	THFP fusible switch 30/60 A 240 V	A	same as above
Material	Copper	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00961	THFP62DPK	GE	branch-connector-kit	STATUS UNKNOWN

GE QMR panelboard copper mounting kit THFP62DPK (THFP fusible switch, 30-60 A, dual)

OEM part number	THFP62DPK	A	S650 9-117; oem_spec
Description	QMR mounting hardware kit, copper, for use with Cu or Al main bus, dual mounted; THFP fusible switch 30-60 A, 240 & 600 V	A	same as above
Breaker compatibility	THFP fusible switch 30-60 A 240 & 600 V	A	same as above
Material	Copper	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00965	THFP62SPK	GE	branch-connector-kit	STATUS UNKNOWN

GE QMR panelboard copper mounting kit THFP62SPK (THFP fusible switch, 30/60/100 A, single)

OEM part number	THFP62SPK	A	S650 9-117; oem_spec
Description	QMR mounting hardware kit, copper, for use with Cu or Al main bus, single mounted; THFP fusible switch 30/60/100 A, 240 & 600 V	A	same as above
Breaker compatibility	THFP fusible switch 30/60/100 A 240 & 600 V	A	same as above
Material	Copper	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00600	THFP63DPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE QMR panelboard twin mounting hardware for THFP fusible switch, 100 A

OEM part number	THFP63DPK	C	S444 surplus_listing
Description	MTG HRDWRE/QMR panelboard - twin mount 100 A	C	same as above
Application	branch (twin)	C	same as above
Installation location	QMR fusible power panelboard	C	same as above
Breaker compatibility	THFP fusible switch	C	same as above
Current rating	100 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00963	THFP63DPKC	GE	branch-connector-kit	STATUS UNKNOWN

GE QMR panelboard copper mounting kit THFP63DPKC (THFP fusible switch, 100-30/60 A, dual)

OEM part number	THFP63DPKC	A	S650 9-117; oem_spec
Description	QMR mounting hardware kit, copper, for use with Cu or Al main bus, dual mounted; THFP fusible switch 100-30/60 A, 600 V	A	same as above
Breaker compatibility	THFP fusible switch 100-30/60 A 600 V	A	same as above
Material	Copper	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00962	THFP63DPKJ	GE	branch-connector-kit	STATUS UNKNOWN

GE QMR panelboard copper mounting kit THFP63DPKJ (THFP fusible switch, 100 A, dual)

OEM part number	THFP63DPKJ	A	S650 9-117; oem_spec
Description	QMR mounting hardware kit, copper, for use with Cu or Al main bus, dual mounted; THFP fusible switch 100 A, 600 V	A	same as above
Breaker compatibility	THFP fusible switch 100 A 600 V	A	same as above
Material	Copper	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Kit contents		
Open question	*QMR 600 V 100 A double-branch units need min 40 in width; 600 V 30/60 A double and 240 V 30/60/100 A single/double fit 35 in enclosure (2008 note).*		

EDH-GEA-00601	THFP63SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE QMR panelboard single mounting hardware for THFP fusible switch, 100 A

OEM part number	THFP63SPK	C	S444 surplus_listing
Description	MTG HRDWRE/QMR panelboard - single mount 100 A	C	same as above
Application	branch (single)	C	same as above
Installation location	QMR fusible power panelboard	C	same as above
Breaker compatibility	THFP fusible switch	C	same as above
Current rating	100 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00602	THFP64SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE QMR panelboard single mounting hardware for THFP fusible switch, 200 A

OEM part number	THFP64SPK	C	S444 surplus_listing
Description	MTG HRDWRE/QMR panelboard - single mount 200 A	C	same as above
Application	branch (single)	C	same as above
Installation location	QMR fusible power panelboard	C	same as above
Breaker compatibility	THFP fusible switch	C	same as above
Current rating	200 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00603	THFP65SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE QMR panelboard single mounting hardware for THFP fusible switch, 400 A

OEM part number	THFP65SPK	C	S444 surplus_listing
Description	MTG HRDWRE/QMR panelboard - single mount 400 A	C	same as above
Application	branch (single)	C	same as above
Installation location	QMR fusible power panelboard	C	same as above
Breaker compatibility	THFP fusible switch	C	same as above
Current rating	400 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00966	THFP66SPK	GE	branch-connector-kit	STATUS UNKNOWN

GE QMR panelboard copper mounting kit THFP66SPK (THFP fusible switch, 600 A, single)

OEM part number	THFP66SPK	A	S650 9-117; oem_spec
Description	QMR mounting hardware kit, copper, for use with Cu or Al main bus, single mounted; THFP fusible switch 600 A, 240 & 600 V	A	same as above
Breaker compatibility	THFP fusible switch 600 A 240 & 600 V	A	same as above
Material	Copper	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00967	THFP67SPK	GE	branch-connector-kit	STATUS UNKNOWN

GE QMR panelboard copper mounting kit THFP67SPK (THFP fusible switch, 1200 A, single)

OEM part number	THFP67SPK	A	S650 9-117; oem_spec
Description	QMR mounting hardware kit, copper, for use with Cu or Al main bus, single mounted; THFP fusible switch 1200 A, 240 & 600 V	A	same as above
Breaker compatibility	THFP fusible switch 1200 A 240 & 600 V	A	same as above
Material	Copper	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00597	THJV6DPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE CCB panelboard mounting hardware for THJV (listed 'twin mounted')

OEM part number	THJV6DPK	C	S444 surplus_listing
Description	MTG HRDWRE/CCB panelboard - twin mounted	C	same as above
Application	branch (title twin; spec block single - conflict)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	THJV	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00953	THLC1DPK	GE	branch-connector-kit	STATUS UNKNOWN

GE CCB panelboard copper strap mounting kit THLC1DPK (TLB1/THLC1, 150 A, dual)

OEM part number	THLC1DPK	A	S650 9-116; oem_spec
Description	CCB panelboard mounting hardware - copper straps, dual mounted, for use on Cu or Al main bus; TLB1/THLC1 breaker, 150 A kit rating	A	same as above
Application	CCB/QMR panelboards; per 2008 suffix table the DPK/SPK hardware suffixes also apply to "Switchboards"	A	S650 9-116; 9-117 "Device and Hardware Suffix Selection"; oem_spec
Breaker compatibility	TLB1/THLC1	A	S650 9-116; oem_spec
Current rating	150 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Kit contents, Torque values		
Open question	*THLC 1/2/4 breakers were noted as no longer available in 2008; are THLC/TLB kits still supplied?*		

EDH-GEA-00958	THLC1SPK	GE	branch-connector-kit	STATUS UNKNOWN

GE CCB panelboard copper strap mounting kit THLC1SPK (TLB1, 150 A, single)

OEM part number	THLC1SPK	A	S650 9-116; oem_spec
Description	CCB panelboard mounting hardware - copper straps, single mounted, for use on Cu or Al main bus; TLB1 breaker, 150 A kit rating	A	same as above
Application	CCB/QMR panelboards; per 2008 suffix table the DPK/SPK hardware suffixes also apply to "Switchboards"	A	S650 9-116; 9-117 "Device and Hardware Suffix Selection"; oem_spec
Breaker compatibility	TLB1	A	S650 9-116; oem_spec
Current rating	150 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Kit contents, Torque values		
Open question	*THLC 1/2/4 breakers were noted as no longer available in 2008; are THLC/TLB kits still supplied?*		

EDH-GEA-00959	THLC4SPK	GE	branch-connector-kit	STATUS UNKNOWN

GE CCB panelboard copper strap mounting kit THLC4SPK (TLB4, 400 A, single)

OEM part number	THLC4SPK	A	S650 9-116; oem_spec
Description	CCB panelboard mounting hardware - copper straps, single mounted, for use on Cu or Al main bus; TLB4 breaker, 400 A kit rating	A	same as above
Application	CCB/QMR panelboards; per 2008 suffix table the DPK/SPK hardware suffixes also apply to "Switchboards"	A	S650 9-116; 9-117 "Device and Hardware Suffix Selection"; oem_spec
Breaker compatibility	TLB4	A	S650 9-116; oem_spec
Current rating	400 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Kit contents, Torque values		
Open question	*THLC 1/2/4 breakers were noted as no longer available in 2008; are THLC/TLB kits still supplied?*		

EDH-GEA-00259	TJ4DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)

OEM part number	TJ4DPK	A	S143 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TJD/TJJ/TJK, 400 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TJD/TJJ/TJK	A	same as above
Current rating	400 A	A	same as above
Material	Copper straps	A	same as above
Aftermarket / reproduction	Breaker King offers BTJK4GE (kit # TJK4K) as a replacement ('Kit # TJK4K replaces OEM TJ4DPK'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: CCB-QMR · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00260	TJ6DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)

OEM part number	TJ6DPK	A	S143 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TJK, 600 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TJK	A	same as above
Current rating	600 A	A	same as above
Material	Copper straps	A	same as above
Aftermarket / reproduction	Breaker King offers BTJK6GE (kit # TJK6K) as a replacement ('Kit # TJK6K replaces OEM TJ6DPK'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: CCB-QMR · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00596	TJ6SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE CCB panelboard single-mounted strap kit, 600 A J-frame

OEM part number	TJ6SPK	C	S444 surplus_listing
Description	MTG HRDWRE/CCB panelboard - single mounted 600A strap kit	C	same as above
Application	branch (single)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	TJD, TJJ, TJK, THJK, TJ4V, TJL4V	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00957	TJ9SPK	GE	branch-connector-kit	STATUS UNKNOWN

GE CCB panelboard copper strap mounting kit TJ9SPK (TJL1-6, S / TJH1-6S, 600 A, single)

OEM part number	TJ9SPK	A	S650 9-116; oem_spec
Description	CCB panelboard mounting hardware - copper straps, single mounted, for use on Cu or Al main bus; TJL1-6, S / TJH1-6S breaker, 600 A kit rating	A	same as above
Application	CCB/QMR panelboards; per 2008 suffix table the DPK/SPK hardware suffixes also apply to "Switchboards"	A	S650 9-116; 9-117 "Device and Hardware Suffix Selection"; oem_spec
Breaker compatibility	TJL1-6, S / TJH1-6S	A	S650 9-116; oem_spec
Current rating	600 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Kit contents, Torque values		

EDH-GEA-00264	TK12SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)

OEM part number	TK12SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S143, S650 p.11-49; oem_spec
Alternate / superseded numbers	TK12SPK3,4 (as printed with footnote(s) fused)	A	S650 alias; 9-116; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, TKM12/THKM12, 1200 A kit. Deep mounted interior required; requires 7X at extreme end or 8X if mounted in center of interior	A	S143 p.11-49; oem_spec
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
	Footnote 3: deep mounted interior is required; footnote 4: requires 7X of space at extreme end of interior or 8X if mounted in center	A	S650 9-116; oem_spec
Breaker compatibility	TKM12/THKM12	A	S143 p.11-49; oem_spec
Current rating	1200 A	A	same as above
Material	Copper straps	A	same as above
Aftermarket / reproduction	Breaker King offers BTK12GE (kit # TKM12K) as a replacement ('Kit TKM12K; Replaces OEM TK12SPK'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: CCB-QMR · Breakers: TKM / THKM		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00263	TK8SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)

OEM part number	TK8SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S143, S650 p.11-49; oem_spec
Alternate / superseded numbers	TK8SPK3 (as printed with footnote(s) fused)	A	S650 alias; 9-116; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, TKM8/THKM8, 800 A kit. Deep mounted interior required	A	S143 p.11-49; oem_spec
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
	Footnote 3: deep mounted interior is required	A	S650 9-116; oem_spec
Breaker compatibility	TKM8/THKM8	A	S143 p.11-49; oem_spec
Current rating	800 A	A	same as above
Material	Copper straps	A	same as above
Aftermarket / reproduction	Breaker King offers BTK8GE (kit # TKM8K) as a replacement ('Kit TKM8K; Replaces OEM TK8SPK'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: CCB-QMR · Breakers: TKM / THKM		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00599	TK9SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE QMR panel mount for TKL/TKH breakers, 1200 A 600 V

OEM part number	TK9SPK	C	S444 surplus_listing
Description	1200A 600V QMR panel mount for TKL/TKH breakers	C	same as above
Installation location	QMR	C	same as above
Breaker compatibility	TKL, TKH	C	same as above
Current rating	1200 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00956	TKL12SPK	GE	branch-connector-kit	STATUS UNKNOWN

GE CCB panelboard copper strap mounting kit TKL12SPK (TK4V/THK4V/TKL4V, 1200 A, single)

OEM part number	TKL12SPK	A	S650 9-116; oem_spec
Alternate / superseded numbers	TKL12SPK4 [alias] (as printed with footnote fused (3 = deep mounted interior required; 4 = 7X/8X space note))	A	same as above
Description	CCB panelboard mounting hardware - copper straps, single mounted; requires 7X of space at extreme end (top/bottom) of interior or 8X in center, for use on Cu or Al main bus; TK4V/THK4V/TKL4V breaker, 1200 A kit rating	A	same as above
Application	CCB/QMR panelboards; per 2008 suffix table the DPK/SPK hardware suffixes also apply to "Switchboards"	A	S650 9-116; 9-117 "Device and Hardware Suffix Selection"; oem_spec
Breaker compatibility	TK4V/THK4V/TKL4V	A	S650 9-116; oem_spec
Current rating	1200 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, Kit contents, Torque values		

EDH-GEA-00595	TP8SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE mounting hardware for Tri-Pac 800 A breaker (CCB/AV)

OEM part number	TP8SPK	C	S444 surplus_listing
Description	Mounting hardware for Tri Pac 800A breaker	C	same as above
Application	branch (single)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	TB6, TB8 (spec block) / Tri-Pac 800 A (title)	C	same as above
Current rating	800 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00258	TQ2DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)

OEM part number	TQ2DPK	A	S143 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TQD, 225 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TQD	A	same as above
Current rating	225 A	A	same as above
Material	Copper straps	A	same as above
Aftermarket / reproduction	Distributor listings (e.g. Stanion 'tq2dpkge') describe TQ2DPK as 'For Use With: TQD Frame 125 to 225 A Circuit Breaker and Spectra Series CCB, QMR Panelboard' (Stanion page seen only via search summary; returned 404 on fetch)	C	S163 distributor
	Breaker King offers BTQDGE (kit # TQD1K) as a replacement ('Kit # TQD1K replaces OEM TQ2DPK'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: CCB-QMR · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00960	**SFCARE**	GE SFCARE additional insulators for SF2DPK on existing CCB hardware	—	Listed in ABB eCatalog (2026-10-21)

EDH-GEA-00960	SFCARE	GE	insulator	LISTED IN ABB ECATALOG

GE SFCARE additional insulators for SF2DPK on existing CCB hardware

OEM part number	SFCARE	A	S650 9-116 fn.1; oem_spec
Description	ABB eCatalog: "SF FRAME REPLCMT PART KITGROUP MTD" (UPC 783164172348); category Spectra Power - Merchand. Old Style Pwr Pk Units	A	S426 oem_spec
	Additional insulators; must be ordered (GO-148F) if mounting hardware exists when installing SF2DPK (SFH/SFL 225 A max) in CCB panel	A	S650 9-116 footnote 1; oem_spec
Status	Listed in ABB eCatalog (2026-10-21)	A	S426 oem_spec
Cross-links	Families: CCB-QMR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Material, quantity		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00275	**75C145005G703**	QMR panelboard filler plate 3X	—	unknown
EDH-GEA-00270	**75C145005G711**	CCB panelboard filler plate 2X	—	unknown
EDH-GEA-00271	**75C145005G715**	CCB panelboard filler plate 6X	—	unknown
EDH-GEA-00609	**CCBBLANK**	GE CCB 3-pole blanks	—	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00267	**CCBFP1**	CCB panelboard filler plate 1X	—	unknown
EDH-GEA-00268	**CCBFP3**	CCB panelboard filler plate 3X	—	unknown
EDH-GEA-00269	**CCBFP5**	CCB panelboard filler plate 5X	—	unknown
EDH-GEA-00608	**GAVFP2**	GE blank filler plate 4.125 in x 17 in (AV1/AV2/CCB)	—	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00612	**GAVFP3**	GE CCB/AV filler plate GAVFP3 (3X) - per seller listing	—	unknown
EDH-GEA-00272	**QMRFP1**	QMR panelboard filler plate 1X	—	unknown
EDH-GEA-00273	**QMRFP2**	QMR panelboard filler plate 2X	—	unknown
EDH-GEA-00610	**QMRFP3**	GE QMR full-width filler, 3X, 4.125 in x 24 in	—	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00274	**QMRFP5**	QMR panelboard filler plate 5X	—	unknown

EDH-GEA-00275	75C145005G703	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 3X

OEM part number	75C145005G703	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 3X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00270	75C145005G711	GE	filler-plate	STATUS UNKNOWN

CCB panelboard filler plate 2X

OEM part number	75C145005G711	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 2X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00271	75C145005G715	GE	filler-plate	STATUS UNKNOWN

CCB panelboard filler plate 6X

OEM part number	75C145005G715	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 6X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00609	CCBBLANK	General Electric	filler-plate	DISCONTINUED OEM ITEM

GE CCB 3-pole blanks

OEM part number	CCBBLANK	C	S444 surplus_listing
Description	CCB 3P blanks	C	same as above
Installation location	CCB power panelboard	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*Dealer code - OEM catalog number unknown*		

EDH-GEA-00267	CCBFP1	GE	filler-plate	STATUS UNKNOWN

CCB panelboard filler plate 1X

OEM part number	CCBFP1	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 1X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00268	CCBFP3	GE	filler-plate	STATUS UNKNOWN

CCB panelboard filler plate 3X

OEM part number	CCBFP3	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 3X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00269	CCBFP5	GE	filler-plate	STATUS UNKNOWN

CCB panelboard filler plate 5X

OEM part number	CCBFP5	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 5X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00608	GAVFP2	General Electric	filler-plate	DISCONTINUED OEM ITEM

GE blank filler plate 4.125 in x 17 in (AV1/AV2/CCB)

OEM part number	GAVFP2	C	S444 surplus_listing
Description	4.125in x 17in blank filler plate	C	same as above
Installation location	AV1, AV2, CCB	C	same as above
Dimensions	4.125 in H x 17 in W	C	same as above
	Breaker King BFP2CCBGE (lists part GAVFP2): 2X, 2.75 in H x 17 in W, gray painted sheet steel, for CCB/AV1/AV2 (conflicts with existing 4.125 x 17 in claim; verify)	C	S627 distributor
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444 surplus_listing
Aftermarket / reproduction	Sourcing: Breaker King SKU BFP2CCBGE (manufacturer field GE/ABB; condition not stated)	D	S627 distributor
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00612	GAVFP3	GE / ABB lineage	filler-plate	STATUS UNKNOWN

GE CCB/AV filler plate GAVFP3 (3X) - per seller listing

OEM part number	GAVFP3	C	S627 distributor
Alternate / superseded numbers	CCBFP3 [alias] (seller lists 'GAVFP3, CCBFP3' together)	C	same as above
Dimensions	3X, 4-1/8 in H x 17 in W	C	same as above
Aftermarket / reproduction	Sourcing: Breaker King SKU BFP3CCBGE (GE/ABB; condition not stated)	D	same as above
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	Material, Status		

EDH-GEA-00272	QMRFP1	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 1X

OEM part number	QMRFP1	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 1X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00273	QMRFP2	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 2X

OEM part number	QMRFP2	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 2X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00610	QMRFP3	General Electric	filler-plate	DISCONTINUED OEM ITEM

GE QMR full-width filler, 3X, 4.125 in x 24 in

OEM part number	QMRFP3	C	S444 surplus_listing
Description	Full width QMR filler-3X panelboard full width filler; 4.125 in H x 24 in W	C	same as above
Installation location	QMR	C	same as above
Dimensions	4.125 in H x 24 in W (3X at 1.375 in)	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00274	QMRFP5	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 5X

OEM part number	QMRFP5	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 5X height (order from local sales office or equipment plant)	A	same as above
	empower: "FULL WIDTH QMR FILLER-5X" (UPC 783164228939)	A	S426 empower page QMRFP5; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-01022	**CBA3121F**	GE CCB replacement front CBA3121F (flush, 31 x 9 1/2 in box, 15X)	—	unknown
EDH-GEA-01021	**CBA3121S**	GE CCB replacement front CBA3121S (surface, 31 x 9 1/2 in box, 15X)	—	unknown
EDH-GEA-01024	**CBA3124F**	GE CCB replacement front CBA3124F (flush, 31 x 9 1/2 in box, 18X)	—	unknown
EDH-GEA-01023	**CBA3124S**	GE CCB replacement front CBA3124S (surface, 31 x 9 1/2 in box, 18X)	—	unknown
EDH-GEA-01026	**CBA3127F**	GE CCB replacement front CBA3127F (flush, 31 x 9 1/2 in box, 21X)	—	unknown
EDH-GEA-01025	**CBA3127S**	GE CCB replacement front CBA3127S (surface, 31 x 9 1/2 in box, 21X)	—	unknown
EDH-GEA-01028	**CBA3130F**	GE CCB replacement front CBA3130F (flush, 31 x 9 1/2 in box, 24X)	—	unknown
EDH-GEA-01027	**CBA3130S**	GE CCB replacement front CBA3130S (surface, 31 x 9 1/2 in box, 24X)	—	unknown
EDH-GEA-01030	**CBA3136F**	GE CCB replacement front CBA3136F (flush, 31 x 9 1/2 in box, 30X)	—	unknown
EDH-GEA-01029	**CBA3136S**	GE CCB replacement front CBA3136S (surface, 31 x 9 1/2 in box, 30X)	—	unknown
EDH-GEA-01032	**CBA3148F**	GE CCB replacement front CBA3148F (flush, 31 x 9 1/2 in box, 42X)	—	unknown
EDH-GEA-01031	**CBA3148S**	GE CCB replacement front CBA3148S (surface, 31 x 9 1/2 in box, 42X)	—	unknown
EDH-GEA-01034	**CBA3542F**	GE CCB replacement front CBA3542F (flush, 35 x 11 1/2 in box, 36X)	—	unknown
EDH-GEA-01033	**CBA3542S**	GE CCB replacement front CBA3542S (surface, 35 x 11 1/2 in box, 36X)	—	unknown
EDH-GEA-01036	**CBA4027F**	GE CCB replacement front CBA4027F (flush, 40 x 11 1/2 in box, 21X)	—	unknown
EDH-GEA-01035	**CBA4027S**	GE CCB replacement front CBA4027S (surface, 40 x 11 1/2 in box, 21X)	—	unknown
EDH-GEA-01038	**CBA4030F**	GE CCB replacement front CBA4030F (flush, 40 x 11 1/2 in box, 24X)	—	unknown
EDH-GEA-01037	**CBA4030S**	GE CCB replacement front CBA4030S (surface, 40 x 11 1/2 in box, 24X)	—	unknown
EDH-GEA-01040	**CBA4036F**	GE CCB replacement front CBA4036F (flush, 40 x 11 1/2 in box, 30X)	—	unknown
EDH-GEA-01039	**CBA4036S**	GE CCB replacement front CBA4036S (surface, 40 x 11 1/2 in box, 30X)	—	unknown
EDH-GEA-01042	**CBA4039F**	GE CCB replacement front CBA4039F (flush, 40 x 11 1/2 in box, 33X)	—	unknown
EDH-GEA-01041	**CBA4039S**	GE CCB replacement front CBA4039S (surface, 40 x 11 1/2 in box, 33X)	—	unknown
EDH-GEA-01044	**CBA4042F**	GE CCB replacement front CBA4042F (flush, 40 x 11 1/2 in box, 36X)	—	unknown
EDH-GEA-01043	**CBA4042S**	GE CCB replacement front CBA4042S (surface, 40 x 11 1/2 in box, 36X)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-01046	**CBA4045F**	GE CCB replacement front CBA4045F (flush, 40 x 11 1/2 in box, 39X)	—	unknown
EDH-GEA-01045	**CBA4045S**	GE CCB replacement front CBA4045S (surface, 40 x 11 1/2 in box, 39X)	—	unknown

EDH-GEA-01022 **CBA3121F** GE trim **STATUS UNKNOWN**

GE CCB replacement front CBA3121F (flush, 31 x 9 1/2 in box, 15X)

OEM part number	CBA3121F (printed as "CBA3121S,F" - F variant inferred from footnote)	**B**	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 31 x 9 1/2 in deep box, 15X, box height 49 in	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01021 **CBA3121S** GE trim **STATUS UNKNOWN**

GE CCB replacement front CBA3121S (surface, 31 x 9 1/2 in box, 15X)

OEM part number	CBA3121S	**A**	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 31 x 9 1/2 in deep box, 15X, box height 49 in	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01024 **CBA3124F** GE trim **STATUS UNKNOWN**

GE CCB replacement front CBA3124F (flush, 31 x 9 1/2 in box, 18X)

OEM part number	CBA3124F (printed as "CBA3124S,F" - F variant inferred from footnote)	**B**	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 31 x 9 1/2 in deep box, 18X, box height 53 1/2 in	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01023 **CBA3124S** GE trim **STATUS UNKNOWN**

GE CCB replacement front CBA3124S (surface, 31 x 9 1/2 in box, 18X)

OEM part number	CBA3124S	**A**	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 31 x 9 1/2 in deep box, 18X, box height 53 1/2 in	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01026 **CBA3127F** GE trim **STATUS UNKNOWN**

GE CCB replacement front CBA3127F (flush, 31 x 9 1/2 in box, 21X)

OEM part number	CBA3127F (printed as "CBA3127S,F" - F variant inferred from footnote)	**B**	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 31 x 9 1/2 in deep box, 21X, box height 57 5/8 in	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01025 **CBA3127S** GE trim **STATUS UNKNOWN**

GE CCB replacement front CBA3127S (surface, 31 x 9 1/2 in box, 21X)

OEM part number	CBA3127S	**A**	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 31 x 9 1/2 in deep box, 21X, box height 57 5/8 in	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01028	CBA3130F	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA3130F (flush, 31 x 9 1/2 in box, 24X)

OEM part number	CBA3130F (printed as "CBA3130S,F" - F variant inferred from footnote)	B	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 31 x 9 1/2 in deep box, 24X, box height 61 3/4 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01027	CBA3130S	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA3130S (surface, 31 x 9 1/2 in box, 24X)

OEM part number	CBA3130S	A	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 31 x 9 1/2 in deep box, 24X, box height 61 3/4 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01030	CBA3136F	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA3136F (flush, 31 x 9 1/2 in box, 30X)

OEM part number	CBA3136F (printed as "CBA3136S,F" - F variant inferred from footnote)	B	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 31 x 9 1/2 in deep box, 30X, box height 70 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01029	CBA3136S	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA3136S (surface, 31 x 9 1/2 in box, 30X)

OEM part number	CBA3136S	A	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 31 x 9 1/2 in deep box, 30X, box height 70 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01032	CBA3148F	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA3148F (flush, 31 x 9 1/2 in box, 42X)

OEM part number	CBA3148F (printed as "CBA3148S,F" - F variant inferred from footnote)	B	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 31 x 9 1/2 in deep box, 42X, box height 86 1/2 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01031	CBA3148S	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA3148S (surface, 31 x 9 1/2 in box, 42X)

OEM part number	CBA3148S	A	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 31 x 9 1/2 in deep box, 42X, box height 86 1/2 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01034	CBA3542F	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA3542F (flush, 35 x 11 1/2 in box, 36X)

OEM part number	CBA3542F (printed as "CBA3542S,F" - F variant inferred from footnote)	B	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 35 x 11 1/2 in deep box, 36X, box height 78 1/4 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01033	CBA3542S	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA3542S (surface, 35 x 11 1/2 in box, 36X)

OEM part number	CBA3542S	A	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 35 x 11 1/2 in deep box, 36X, box height 78 1/4 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01036	CBA4027F	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA4027F (flush, 40 x 11 1/2 in box, 21X)

OEM part number	CBA4027F (printed as "CBA4027S,F" - F variant inferred from footnote)	B	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 40 x 11 1/2 in deep box, 21X, box height 57 5/8 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01035	CBA4027S	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA4027S (surface, 40 x 11 1/2 in box, 21X)

OEM part number	CBA4027S	A	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 40 x 11 1/2 in deep box, 21X, box height 57 5/8 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01038	CBA4030F	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA4030F (flush, 40 x 11 1/2 in box, 24X)

OEM part number	CBA4030F (printed as "CBA4030S,F" - F variant inferred from footnote)	B	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 40 x 11 1/2 in deep box, 24X, box height 61 3/4 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01037	CBA4030S	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA4030S (surface, 40 x 11 1/2 in box, 24X)

OEM part number	CBA4030S	A	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 40 x 11 1/2 in deep box, 24X, box height 61 3/4 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01040	CBA4036F	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA4036F (flush, 40 x 11 1/2 in box, 30X)

OEM part number	CBA4036F (printed as "CBA4036S,F" - F variant inferred from footnote)	B	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 40 x 11 1/2 in deep box, 30X, box height 70 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01039	CBA4036S	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA4036S (surface, 40 x 11 1/2 in box, 30X)

OEM part number	CBA4036S	A	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 40 x 11 1/2 in deep box, 30X, box height 70 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01042	CBA4039F	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA4039F (flush, 40 x 11 1/2 in box, 33X)

OEM part number	CBA4039F (printed as "CBA4039S,F" - F variant inferred from footnote)	B	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 40 x 11 1/2 in deep box, 33X, box height 74 1/8 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01041	CBA4039S	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA4039S (surface, 40 x 11 1/2 in box, 33X)

OEM part number	CBA4039S	A	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 40 x 11 1/2 in deep box, 33X, box height 74 1/8 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01044	CBA4042F	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA4042F (flush, 40 x 11 1/2 in box, 36X)

OEM part number	CBA4042F (printed as "CBA4042S,F" - F variant inferred from footnote)	B	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 40 x 11 1/2 in deep box, 36X, box height 78 1/4 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01043	CBA4042S	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA4042S (surface, 40 x 11 1/2 in box, 36X)

OEM part number	CBA4042S	A	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 40 x 11 1/2 in deep box, 36X, box height 78 1/4 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01046	CBA4045F	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA4045F (flush, 40 x 11 1/2 in box, 39X)

OEM part number	CBA4045F (printed as "CBA4045S,F" - F variant inferred from footnote)	B	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, flush (2 in larger than box), for 40 x 11 1/2 in deep box, 39X, box height 82 3/8 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

EDH-GEA-01045	CBA4045S	GE	trim	STATUS UNKNOWN

GE CCB replacement front CBA4045S (surface, 40 x 11 1/2 in box, 39X)

OEM part number	CBA4045S	A	S650 9-117; oem_spec
Description	Replacement panelboard CCB front, surface (1/4 in larger than box), for 40 x 11 1/2 in deep box, 39X, box height 82 3/8 in	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	door/lock details, Finish / plating, Material		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-01011	**DACB3539**	GE CCB replacement panelboard box DACB3539 (35 x 11 1/2 in, 33X)	—	unknown
EDH-GEA-01012	**DACB3545**	GE CCB replacement panelboard box DACB3545 (35 x 11 1/2 in, 39X)	—	unknown
EDH-GEA-01013	**DACB4027**	GE CCB replacement panelboard box DACB4027 (40 x 11 1/2 in, 21X)	—	unknown
EDH-GEA-01014	**DACB4030**	GE CCB replacement panelboard box DACB4030 (40 x 11 1/2 in, 24X)	—	unknown
EDH-GEA-01015	**DACB4033**	GE CCB replacement panelboard box DACB4033 (40 x 11 1/2 in, 27X)	—	unknown
EDH-GEA-01016	**DACB4036**	GE CCB replacement panelboard box DACB4036 (40 x 11 1/2 in, 30X)	—	unknown
EDH-GEA-01017	**DACB4039**	GE CCB replacement panelboard box DACB4039 (40 x 11 1/2 in, 33X)	—	unknown
EDH-GEA-01018	**DACB4042**	GE CCB replacement panelboard box DACB4042 (40 x 11 1/2 in, 36X)	—	unknown
EDH-GEA-01019	**DACB4045**	GE CCB replacement panelboard box DACB4045 (40 x 11 1/2 in, 39X)	—	unknown
EDH-GEA-01020	**DACB4048**	GE CCB replacement panelboard box DACB4048 (40 x 11 1/2 in, 42X)	—	unknown
EDH-GEA-01005	**DASW3121**	GE CCB replacement panelboard box DASW3121 (31 x 9 1/2 in, 15X)	—	unknown
EDH-GEA-01006	**DASW3127**	GE CCB replacement panelboard box DASW3127 (31 x 9 1/2 in, 21X)	—	unknown
EDH-GEA-01007	**DASW3130**	GE CCB replacement panelboard box DASW3130 (31 x 9 1/2 in, 24X)	—	unknown
EDH-GEA-01008	**DASW3133**	GE CCB replacement panelboard box DASW3133 (31 x 9 1/2 in, 27X)	—	unknown
EDH-GEA-01009	**DASW3136**	GE CCB replacement panelboard box DASW3136 (31 x 9 1/2 in, 30X)	—	unknown
EDH-GEA-01010	**DASW3142**	GE CCB replacement panelboard box DASW3142 (31 x 9 1/2 in, 36X)	—	unknown

EDH-GEA-01011	DACB3539	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DACB3539 (35 x 11 1/2 in, 33X)

OEM part number	DACB3539	A	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	A	same as above
Dimensions	Inside 35 x 11 1/2 in W x D, box height 74 1/8 in, 33X (add 1/4 in for outside)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01012	DACB3545	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DACB3545 (35 x 11 1/2 in, 39X)

OEM part number	DACB3545	A	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	A	same as above
Dimensions	Inside 35 x 11 1/2 in W x D, box height 82 3/8 in, 39X (add 1/4 in for outside)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01013	DACB4027	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DACB4027 (40 x 11 1/2 in, 21X)

OEM part number	DACB4027	A	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	A	same as above
Dimensions	Inside 40 x 11 1/2 in W x D, box height 57 5/8 in, 21X (add 1/4 in for outside)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01014	DACB4030	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DACB4030 (40 x 11 1/2 in, 24X)

OEM part number	DACB4030	A	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	A	same as above
Dimensions	Inside 40 x 11 1/2 in W x D, box height 61 3/4 in, 24X (add 1/4 in for outside)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01015	DACB4033	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DACB4033 (40 x 11 1/2 in, 27X)

OEM part number	DACB4033	A	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	A	same as above
Dimensions	Inside 40 x 11 1/2 in W x D, box height 65 7/8 in, 27X (add 1/4 in for outside)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01016	DACB4036	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DACB4036 (40 x 11 1/2 in, 30X)

OEM part number	DACB4036	A	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	A	same as above
Dimensions	Inside 40 x 11 1/2 in W x D, box height 70 in, 30X (add 1/4 in for outside)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01017	DACB4039	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DACB4039 (40 x 11 1/2 in, 33X)

OEM part number	DACB4039	A	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	A	same as above
Dimensions	Inside 40 x 11 1/2 in W x D, box height 74 1/8 in, 33X (add 1/4 in for outside)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01018	DACB4042	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DACB4042 (40 x 11 1/2 in, 36X)

OEM part number	DACB4042	A	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	A	same as above
Dimensions	Inside 40 x 11 1/2 in W x D, box height 78 1/4 in, 36X (add 1/4 in for outside)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01019	DACB4045	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DACB4045 (40 x 11 1/2 in, 39X)

OEM part number	DACB4045	A	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	A	same as above
Dimensions	Inside 40 x 11 1/2 in W x D, box height 82 3/8 in, 39X (add 1/4 in for outside)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01020	DACB4048	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DACB4048 (40 x 11 1/2 in, 42X)

OEM part number	DACB4048	A	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	A	same as above
Dimensions	Inside 40 x 11 1/2 in W x D, box height 86 1/2 in, 42X (add 1/4 in for outside)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01005	DASW3121	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DASW3121 (31 x 9 1/2 in, 15X)

OEM part number	DASW3121	A	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	A	same as above
Dimensions	Inside 31 x 9 1/2 in W x D, box height 49 in, 15X (add 1/4 in for outside)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01006	DASW3127	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DASW3127 (31 x 9 1/2 in, 21X)

OEM part number	DASW3127	A	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	A	same as above
Dimensions	Inside 31 x 9 1/2 in W x D, box height 57 5/8 in, 21X (add 1/4 in for outside)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01007	DASW3130	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DASW3130 (31 x 9 1/2 in, 24X)

OEM part number	DASW3130	**A**	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	**A**	same as above
Dimensions	Inside 31 x 9 1/2 in W x D, box height 61 3/4 in, 24X (add 1/4 in for outside)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01008	DASW3133	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DASW3133 (31 x 9 1/2 in, 27X)

OEM part number	DASW3133	**A**	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	**A**	same as above
Dimensions	Inside 31 x 9 1/2 in W x D, box height 65 7/8 in, 27X (add 1/4 in for outside)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01009	DASW3136	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DASW3136 (31 x 9 1/2 in, 30X)

OEM part number	DASW3136	**A**	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	**A**	same as above
Dimensions	Inside 31 x 9 1/2 in W x D, box height 70 in, 30X (add 1/4 in for outside)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

EDH-GEA-01010	DASW3142	GE	box/enclosure	STATUS UNKNOWN

GE CCB replacement panelboard box DASW3142 (31 x 9 1/2 in, 36X)

OEM part number	DASW3142	**A**	S650 9-116; oem_spec
Description	Replacement panelboard CCB box, deep box, no knockouts	**A**	same as above
Dimensions	Inside 31 x 9 1/2 in W x D, box height 78 1/4 in, 36X (add 1/4 in for outside)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Finish / plating, Material		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00968	**THFP221X**	GE QMR fusible switch unit THFP221X (30 A, 2-pole, 240 V, 3X unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00969	**THFP221XL**	GE QMR fusible switch unit THFP221XL (30 A, 2-pole, 240 V, 3X left hand unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00974	**THFP222X**	GE QMR fusible switch unit THFP222X (60 A, 2-pole, 240 V, 3X unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00975	**THFP222XL**	GE QMR fusible switch unit THFP222XL (60 A, 2-pole, 240 V, 3X left hand unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00977	**THFP223**	GE QMR fusible switch unit THFP223 (100 A, 2-pole, 240 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00978	**THFP223L**	GE QMR fusible switch unit THFP223L (100 A, 2-pole, 240 V, left hand unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00979	**THFP223X**	GE QMR fusible switch unit THFP223X (100 A, 2-pole, 240 V, 3X unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00980	**THFP223XL**	GE QMR fusible switch unit THFP223XL (100 A, 2-pole, 240 V, 3X left hand unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00982	**THFP224**	GE QMR fusible switch unit THFP224 (200 A, 2-pole, 240 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00984	**THFP225**	GE QMR fusible switch unit THFP225 (400 A, 2-pole, 240 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00986	**THFP226**	GE QMR fusible switch unit THFP226 (600 A, 2-pole, 240 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00988	**THFP261**	GE QMR fusible switch unit THFP261 (30 A, 2-pole, 600 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00989	**THFP261L**	GE QMR fusible switch unit THFP261L (30 A, 2-pole, 600 V, left hand unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00992	**THFP262**	GE QMR fusible switch unit THFP262 (60 A, 2-pole, 600 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00993	**THFP262L**	GE QMR fusible switch unit THFP262L (60 A, 2-pole, 600 V, left hand unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00996	**THFP263**	GE QMR fusible switch unit THFP263 (100 A, 2-pole, 600 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00997	**THFP263L**	GE QMR fusible switch unit THFP263L (100 A, 2-pole, 600 V, old style (printed; L = left hand))	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00970	**THFP321**	GE QMR fusible switch unit THFP321 (30 A, 3-pole, 240 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00971	**THFP321L**	GE QMR fusible switch unit THFP321L (30 A, 3-pole, 240 V, left hand unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00972	**THFP321X**	GE QMR fusible switch unit THFP321X (30 A, 3-pole, 240 V, 3X unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00973	**THFP321XL**	GE QMR fusible switch unit THFP321XL (30 A, 3-pole, 240 V, 3X left hand unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00976	**THFP322**	GE QMR fusible switch unit THFP322 (60 A, 3-pole, 240 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00981	**THFP323**	GE QMR fusible switch unit THFP323 (100 A, 3-pole, 240 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00983	**THFP324**	GE QMR fusible switch unit THFP324 (200 A, 3-pole, 240 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00985	**THFP325**	GE QMR fusible switch unit THFP325 (400 A, 3-pole, 240 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00987	**THFP326**	GE QMR fusible switch unit THFP326 (600 A, 3-pole, 240 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00990	**THFP361**	GE QMR fusible switch unit THFP361 (30 A, 3-pole, 600 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00991	**THFP361L**	GE QMR fusible switch unit THFP361L (30 A, 3-pole, 600 V, left hand unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00994	**THFP362**	GE QMR fusible switch unit THFP362 (60 A, 3-pole, 600 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00995	**THFP362L**	GE QMR fusible switch unit THFP362L (60 A, 3-pole, 600 V, left hand unit - old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00998	**THFP363**	GE QMR fusible switch unit THFP363 (100 A, 3-pole, 600 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-00999	**THFP363L**	GE QMR fusible switch unit THFP363L (100 A, 3-pole, 600 V, old style (printed; L = left hand))	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-01000	**THFP364**	GE QMR fusible switch unit THFP364 (200 A, 3-pole, 600 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-01001	**THFP365**	GE QMR fusible switch unit THFP365 (400 A, 3-pole, 600 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-01002	**THFP366**	GE QMR fusible switch unit THFP366 (600 A, 3-pole, 600 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-01003	**THFP367**	GE QMR fusible switch unit THFP367 (800 A, 3-pole, 600 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy
EDH-GEA-01004	**THFP368**	GE QMR fusible switch unit THFP368 (1200 A, 3-pole, 600 V, old style)	—	Listed as replacement ("Old Style") renewal item in 2008 Buy

EDH-GEA-00968 — THFP221X — GE — switch-unit — LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP221X (30 A, 2-pole, 240 V, 3X unit - old style)

OEM part number	THFP221X	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 30 A, 2-pole, 240 V, 3X unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	30 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00969 — THFP221XL — GE — switch-unit — LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP221XL (30 A, 2-pole, 240 V, 3X left hand unit - old style)

OEM part number	THFP221XL	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 30 A, 2-pole, 240 V, 3X left hand unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	30 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00974 — THFP222X — GE — switch-unit — LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP222X (60 A, 2-pole, 240 V, 3X unit - old style)

OEM part number	THFP222X	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 60 A, 2-pole, 240 V, 3X unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	60 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00975	THFP222XL	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP222XL (60 A, 2-pole, 240 V, 3X left hand unit - old style)

OEM part number	THFP222XL	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 60 A, 2-pole, 240 V, 3X left hand unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	60 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00977	THFP223	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP223 (100 A, 2-pole, 240 V, old style)

OEM part number	THFP223	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 100 A, 2-pole, 240 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	100 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00978	THFP223L	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP223L (100 A, 2-pole, 240 V, left hand unit - old style)

OEM part number	THFP223L	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 100 A, 2-pole, 240 V, left hand unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	100 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00979	THFP223X	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP223X (100 A, 2-pole, 240 V, 3X unit - old style)

OEM part number	THFP223X	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 100 A, 2-pole, 240 V, 3X unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	100 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00980	THFP223XL	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP223XL (100 A, 2-pole, 240 V, 3X left hand unit - old style)

OEM part number	THFP223XL	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 100 A, 2-pole, 240 V, 3X left hand unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	100 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00982	THFP224	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP224 (200 A, 2-pole, 240 V, old style)

OEM part number	THFP224	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 200 A, 2-pole, 240 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	200 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00984	THFP225	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP225 (400 A, 2-pole, 240 V, old style)

OEM part number	THFP225	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 400 A, 2-pole, 240 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	400 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00986	THFP226	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP226 (600 A, 2-pole, 240 V, old style)

OEM part number	THFP226	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 600 A, 2-pole, 240 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	600 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00988	THFP261	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP261 (30 A, 2-pole, 600 V, old style)

OEM part number	THFP261	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 30 A, 2-pole, 600 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	30 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00989	THFP261L	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP261L (30 A, 2-pole, 600 V, left hand unit - old style)

OEM part number	THFP261L	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 30 A, 2-pole, 600 V, left hand unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	30 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00992	THFP262	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP262 (60 A, 2-pole, 600 V, old style)

OEM part number	THFP262	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 60 A, 2-pole, 600 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	60 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00993	THFP262L	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP262L (60 A, 2-pole, 600 V, left hand unit - old style)

OEM part number	THFP262L	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 60 A, 2-pole, 600 V, left hand unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	60 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00996	THFP263	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP263 (100 A, 2-pole, 600 V, old style)

OEM part number	THFP263	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 100 A, 2-pole, 600 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	100 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00997	THFP263L	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP263L (100 A, 2-pole, 600 V, old style (printed; L = left hand))

OEM part number	THFP263L	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 100 A, 2-pole, 600 V, old style (printed; L = left hand); mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	2	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	100 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00970	THFP321	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP321 (30 A, 3-pole, 240 V, old style)

OEM part number	THFP321	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 30 A, 3-pole, 240 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	30 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00971	THFP321L	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP321L (30 A, 3-pole, 240 V, left hand unit - old style)

OEM part number	THFP321L	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 30 A, 3-pole, 240 V, left hand unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	30 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00972	THFP321X	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP321X (30 A, 3-pole, 240 V, 3X unit - old style)

OEM part number	THFP321X	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 30 A, 3-pole, 240 V, 3X unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	30 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00973	THFP321XL	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP321XL (30 A, 3-pole, 240 V, 3X left hand unit - old style)

OEM part number	THFP321XL	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 30 A, 3-pole, 240 V, 3X left hand unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	30 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00976	THFP322	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP322 (60 A, 3-pole, 240 V, old style)

OEM part number	THFP322	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 60 A, 3-pole, 240 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	60 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00981	THFP323	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP323 (100 A, 3-pole, 240 V, old style)

OEM part number	THFP323	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 100 A, 3-pole, 240 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	100 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00983	THFP324	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP324 (200 A, 3-pole, 240 V, old style)

OEM part number	THFP324	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 200 A, 3-pole, 240 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	200 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00985	THFP325	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP325 (400 A, 3-pole, 240 V, old style)

OEM part number	THFP325	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 400 A, 3-pole, 240 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	400 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00987	THFP326	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP326 (600 A, 3-pole, 240 V, old style)

OEM part number	THFP326	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 600 A, 3-pole, 240 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 240 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	240 V	A	same as above
Current rating	600 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00990	THFP361	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP361 (30 A, 3-pole, 600 V, old style)

OEM part number	THFP361	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 30 A, 3-pole, 600 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	30 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00991	THFP361L	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP361L (30 A, 3-pole, 600 V, left hand unit - old style)

OEM part number	THFP361L	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 30 A, 3-pole, 600 V, left hand unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	30 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00994	THFP362	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP362 (60 A, 3-pole, 600 V, old style)

OEM part number	THFP362	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 60 A, 3-pole, 600 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	60 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00995	THFP362L	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP362L (60 A, 3-pole, 600 V, left hand unit - old style)

OEM part number	THFP362L	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 60 A, 3-pole, 600 V, left hand unit - old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	60 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00998	THFP363	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP363 (100 A, 3-pole, 600 V, old style)

OEM part number	THFP363	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 100 A, 3-pole, 600 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	100 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-00999	THFP363L	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP363L (100 A, 3-pole, 600 V, old style (printed; L = left hand))

OEM part number	THFP363L	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 100 A, 3-pole, 600 V, old style (printed; L = left hand); mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	100 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-01000	THFP364	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP364 (200 A, 3-pole, 600 V, old style)

OEM part number	THFP364	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 200 A, 3-pole, 600 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	200 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-01001	THFP365	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP365 (400 A, 3-pole, 600 V, old style)

OEM part number	THFP365	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 400 A, 3-pole, 600 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	400 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-01002	THFP366	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP366 (600 A, 3-pole, 600 V, old style)

OEM part number	THFP366	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 600 A, 3-pole, 600 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	600 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-01003	THFP367	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP367 (800 A, 3-pole, 600 V, old style)

OEM part number	THFP367	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 800 A, 3-pole, 600 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	800 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

EDH-GEA-01004	THFP368	GE	switch-unit	LISTED AS REPLACEMENT

GE QMR fusible switch unit THFP368 (1200 A, 3-pole, 600 V, old style)

OEM part number	THFP368	A	S650 9-117/9-118; oem_spec
Description	QMR panelboard fusible switch, 1200 A, 3-pole, 600 V, old style; mounting hardware ordered separately (p.9-116/117) or as complete hole filler kit	A	S650 9-117/9-118 "QMR Fusible Switch 600 V"; oem_spec
Poles	3	A	S650 9-117/9-118; oem_spec
Voltage rating	600 V	A	same as above
Current rating	1200 A	A	same as above
Status	Listed as replacement ("Old Style") renewal item in 2008 BuyLog	B	S650 9-117; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, fuse class, lug data		

5.5 CONVERTI-FUSE — Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards

FAM-GEA-012 · panelboard · aka Converti-Fuse, Safe-Converti-Fuse, Swing-Wa, Swing-WA · markings: Trumbull, General Electric

Trumbull Electric (GE subsidiary) fusible power distribution panelboards. Converti-Fuse: dead-front assembly of phenolic unit sections on a steel back plate whose removable caps hold the fuses and act as pull-out disconnects. Swing-Wa: individually enclosed steel switch units with switching built into the cover. GE bulletin numbers GEC-1253 (Converti-Fuse) and GEC-1255 appear in 1955 trade literature.

Attribute	Value	Cl.	Sources
Status	Obsolete	C	inference
Era of manufacture	Safe-Converti-Fuse introduced by Trumbull c.1930; Converti-Fuse and Swing-Wa catalogued 1951 and listed by GE in 1955 (registered GE trade-marks)	A	S452, S436 oem_spec
Voltage rating	Converti-Fuse: max 250 V DC, 575 V AC, mains 1200 A lugs or 400 A switch, branches 30-400 A; Swing-Wa: max 250 V DC, 575 V AC, mains 1200 A lugs or 600 A switch, branches 30-600 A 2/3-pole	A	S452 GE Supply 1951 p.446; oem_spec
Bulletins	GEC-1253 Converti-Fuse type distribution; GEC-1255 (Swing-Wa / breaker distribution) (From a garbled 1955 Paper Trade Journal snippet; mapping uncertain)	C	S436 inference

Key documents: S436 sim_ecm_1955-03_54_3 Electrical Construction and Maintenance, Vol 54 No 3, March 1955 - General Electric 'Syste; S452 wiringmaterialsp00unse Wiring Materials, Power Apparatus - General Electric Supply Corporation catalog (copyright

5.6 NHB — NAB / NHB bolt-on panelboards (legacy)

FAM-GEA-007 · panelboard · aka ABH, NA, NAB, NHB, NLAB? · markings: General Electric, Trumbull

Legacy GE bolt-on panelboard line. Only distributor evidence found (NHB150PK twin-mount hardware). No OEM document for NHB or NLAB located in this batch.

Evidence record for the existing GE NAB/NHB family. 1951 GE Supply catalog: NAB breakers assembled on a heavy black enamel steel back plate accepting 1, 2 or 3-pole AT breakers; boxes 4-3/4 in deep except 100/225 A main frame which need 5-3/4 in; Type ABH power/lighting panel with AT breakers. NHB appears in the 1955 GE type list; no GE technical description of NHB found yet. ITE/Siemens also used NAB/NHB designations (Canada).

Attribute	Value	Cl.	Sources
Status	discontinued (legacy); hardware sold as new-surplus	C	S159 surplus_listing
Era of manufacture	NAB catalogued 1951 (Trumbull, Type AT breakers); 'Types NAB, NHB' listed in GE March 1955 advertisement; GE 1949 hospital handbook lists 'Type NAB, NA, Multi-Breaker' panels	A	S452, S436 GE Supply 1951 p.441; ECM Mar 1955; oem_spec
Voltage rating	NAB: 125 V DC, 125-250 V or 250 V AC; ABH: max 250 V AC, 125/250 V DC	A	S452 GE Supply 1951 pp.441, 446; oem_spec
Main ampacity	ABH: max 400 A lugs or 225 A circuit breaker mains	A	S452 GE Supply 1951 p.446; oem_spec
Branch breakers accepted	NAB: Type AT, 1/2/3-pole 15, 20, 25, 35, 50 A, one sub-feed up to 225 A; ABH: AT 15-50 A 1/2/3-pole on back plate drilled for universal mounting of 50 A frame breakers; later NAB/NHB twin kits NHB150PK (dealer)	A	S452, S445 oem_spec
	E-frame bolt-on TEB/TED/TEC/THED and SEDA (per distributor)	C	S159 surplus_listing
Dimensions	NAB boxes 4-3/4 in deep (OCR '4%'), 5-3/4 in for 100 or 225 A frame main breakers (Fraction OCR uncertain)	B	S452 p.441; oem_spec

Breaker families associated: GE / Trumbull Type AT and ATB breakers, TEB / TED / THED / TED4 / TED6

Key documents: S159 NHB150PK General Electric / GE Mounting Hardware (product page); S160 General Electric NHB150PK Twin Mount Mounting Hardware (product page); S436 sim_ecm_1955-03_54_3 Electrical Construction and Maintenance, Vol 54 No 3, March 1955 - General Electric 'Syste; S445 Superbreakers - Mounting Kits, Panels & Accessories collection (Shopify products.json,; S452 wiringmaterialsp00unse Wiring Materials, Power Apparatus - General Electric Supply Corporation catalog (copyright

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00036	**BNHB150GE**	Aftermarket bus connection kit BNHB150GE (seller cross-ref to GEA NHB150PK)	mounts two 150 A max E150 frame breakers C	current aftermarket item; listing label 'GE/ABB'
EDH-GEA-00280	**NHB150PK**	NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole	TEB, TED, TEC, THED, SEDA (description); spec list adds SEHA, SELA, SE C	discontinued; new-surplus stock

EDH-OTH-00036	BNHB150GE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BNHB150GE (seller cross-ref to GEA NHB150PK)

OEM part number	BNHB150GE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	NHB150PK [equivalent] (seller cross-reference: 'OEM Item NHB150PK Is Provided as PCS Brand ... (truncated)')	C	same as above
Description	Bus hardware for obsolete GE NHB panelboards; mounts two 150 A max E150 frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two 150 A max E150 frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB' (seller claim)	D	same as above
Replacement / successor	Seller states it replaces OEM NHB150PK ('OEM Item NHB150PK Is Provided as PCS Brand ... (truncated)') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Aftermarket / reproduction	Seller identifies maker/brand as 'PCS' aftermarket kit (seller claim; PCS not further identified)	C	same as above
Cross-links	Families: NHB		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Is this an OEM, surplus or aftermarket-manufactured kit?*		

EDH-GEA-00280	NHB150PK	GE	branch-connector-kit	DISCONTINUED; NEW-SURP

NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole

OEM part number	NHB150PK	B	S159, S160 distributor
Description	Direct replacement mounting hardware for GE NHB bolt-on style panelboards; dual/twin branch mounting; copper; 150 A, 600 V max	C	S159 surplus_listing
Breaker compatibility	TEB, TED, TEC, THED, SEDA (description); spec list adds SEHA, SELA, SEPA (Distributor lists disagree)	C	same as above
Kit contents	Screws, a panel cover and brackets (SuperBreakers)	C	S160 distributor
Material	Copper	C	S159 surplus_listing
Status	discontinued; new-surplus stock	C	same as above
Aftermarket / reproduction	Breaker King offers BNHB150GE as a replacement ('OEM Item NHB150PK Is Provided as PCS Brand ... (truncated)'), labelled 'GE/ABB' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
	Superbreakers sells 'NHB150PK - General Electric Circuit Breaker Equivalent Mounting Hardware ... twin mount equivalent hardware kit for ... General Electric NAB or NHB model panel boards ... includes screws, a panel cover and brackets'. Breaker King lists BNHB150GE: 'OEM Item NHB150PK Is Provided as PCS Brand ...' (seller claims from two resellers; aftermarket maker possibly PCS (Breaker King wording))	C	S445, S627 distributor
Cross-links	Families: NHB · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM confirmation, Dimensions, OEM instruction document		
Open question	*Does NHB150PK also fit NLAB panels? No evidence found.*		

5.7 NLAB — GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)

FAM-GEA-011 · panelboard · aka DB, GE NLAB, NLAB, NLTQ, NLTQX, NTQ, TQLA, TQLP · markings: G-E, General Electric, Trumbull

GE/Trumbull lighting panelboards of the 1950s-1960s. 1951 GE Supply catalog: NLAB 'formerly called NTQ' uses TQ quick-make quick-break thermal-magnetic breakers, 4-42 circuits, standard and column type for mounting in the web of H beams; NLTQ is 'a Trumbull development' with busbars encased in a PLASTISOL interior (said to run 10% cooler) and plug-in TQL breakers; NLTQX is the column type. Fronts are dual-purpose (flush or surface). Finish medium light grey. GE renewal parts list GEG-13610B (Style 5) covers DB, NLTQ and NLAB with bus supports, insulators, lugs, trim clamps, locks and handle-lock devices. Do not confuse with the Westinghouse NLAB (Quicklag breakers).

Attribute	Value	Cl.	Sources
Status	Obsolete (superseded by GE A-Series lighting panelboards - inference from GE line chronology; no GE supersession statement found)	D	inference
Era of manufacture	NLAB (formerly NTQ) and NLTQ catalogued 1951; NLTQ introduced c.1951 as 'Trumbull's new NLTQ panelboard' with first plug-in quick-make quick-break breaker; NAB, NHB, NLAB, NLTQ, NLTQX listed in 1955 GE ad; renewal parts GEG-13610B 'Types DB, NLTQ and NLAB, Style 5' with GEJ-3006A (1969)	A	S452, S461, S436, S453 GE Supply 1951 pp.441-443; ECM Mar 1955; GEJ-3006A; oem_spec
Successor	Probably GE A-Series (AQ) lighting panelboards with THQB/TQD breakers (1984 schedules show NLAB panels with THQB branch breakers)	D	S450 inference
Voltage rating	3-wire 120/240 V AC or 4-wire 3-phase 120/208 V AC; branches 2-wire 120 V; mains lugs only or AT/ATB breakers (50 A AT, 100 A ATB, 200 A AT)	A	S452 GE Supply 1951 pp.441-443; oem_spec
Main ampacity	Lugs and neutral 100, 225, 400, 600 A (lug table in GEG-13610B); 1951 NLTQ boxes 4-12, 14-20, 22-30, 32-42 circuits	A	S453, S452 oem_spec
Branch breakers accepted	NLAB: GE Type TQ (1951), later TQC (handle lock/padlock list); NLTQ: plug-in Type TQL; TQB and TBQ also listed in renewal parts; standard ratings 15-100 A	A	S452, S453 oem_spec
Finish / plating	Trumbull lighting panelboards finish 'Medium Light Grey'	A	S452 GE Supply 1951 p.441; oem_spec
Construction	NLTQ busbars completely encased in PLASTISOL interior; interiors readily removable	A	S452, S461 oem_spec
Identification features	Breaker family on interior: TQ/TQC/TQB/TQL (GE) vs QC/Quicklag (Westinghouse NLAB); renewal parts card behind directory card in door card holder (GEJ-3006A)	B	S452, S453, S440 oem_spec
Listing / approvals	UL listed as panelboards under file E2366 (Trumbull NLTQ)	A	S452 GE Supply 1951 p.442; oem_spec

Attribute	Value	Cl.	Sources
Related types	1957: GE plug-in combination lighting and power panel for TQL 15-50 A 1-pole and common-trip 2/3-pole breakers, up to 54 poles, 240 V AC, mains to 600 A: panel-base assembly Type TQLP or assembled panel Type TQLA	A	S454 ECM June 1957 new products; oem_spec

Breaker families associated: GE / Trumbull Type AT and ATB breakers, GE TQ / TQL / TQC / TQB / TBQ lighting breakers
Key documents: S436 sim_ecm_1955-03_54_3 Electrical Construction and Maintenance, Vol 54 No 3, March 1955 - General Electric 'Syste; S440 CA08100014E Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp; S450 standardapplicat0000muel Standard Application of Electrical Details (1984) - panel schedules showing 'NLAB 100 THQB; S452 wiringmaterialsp00unse Wiring Materials, Power Apparatus - General Electric Supply Corporation catalog (copyright; S453 GEJ-3006A / GEG-13610B GE Installation and Maintenance Instructions GEJ-3006A 'Circuit Breaker Panelboards' with ; S454 sim_ecm_1957-06_56_6 Electrical Construction and Maintenance, Vol 56 No 6, June 1957 - Westinghouse distributio; S461 sim_electrical-wholesaling_1953-10_34_10; sim_plant-engineering_1951-07_5_7 Electrical Wholesaling Oct 1953 / Plant Engineering Jul 1951 - Trumbull advertisements for
Also fits this family (entry printed elsewhere): THL103, TQPLD1, THP100

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00577	**75C140045G705**	GE main lug assembly for phase bars and neutral (100/225 A row), NLAB/NLTQ/DB	—	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00577 **75C140045G705** General Electric lug-kit **OBSOLETE (1969 RENEWAL**

GE main lug assembly for phase bars and neutral (100/225 A row), NLAB/NLTQ/DB

OEM part number	75C140045G705	C	S453 oem_spec
Description	Main lugs for phase bars and neutral: 100 A #14-2/0 Cu or Al; 225 A #6-350 MCM Cu or Al - 75C140045G705 (row assignment ambiguous) (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	C	S453 GEG-13610B renewal parts list; oem_spec
Installation location	Main lugs (phase bars and neutral)	C	S453 oem_spec
Current rating	100 A or 225 A row (ambiguous)	C	same as above
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00580	**121B7147P1**	GE main lug 250-600 MCM, 400 A (1 per phase) / 600 A (2 per phase), NLAB/NLTQ/DB	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00578	**763B795P8**	GE main lug (with 763B795P9), 225 A row, NLAB/NLTQ/DB	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00579	**763B795P9**	GE main lug (with 763B795P8), NLAB/NLTQ/DB	—	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00580 **121B7147P1** General Electric lug **OBSOLETE (1969 RENEWAL**

GE main lug 250-600 MCM, 400 A (1 per phase) / 600 A (2 per phase), NLAB/NLTQ/DB

OEM part number	121B7147P1	B	S453 oem_spec
Description	400 amp: 1 (250-600 MCM) or 2 (250 MCM) Cu or Al - (1) 121B7147P1; 600 amp: 1 (250-600 MCM) or 2 (250 MCM) Cu or Al per lug, 2 lugs required - (2) 121B7147P1 (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	B	S453 GEG-13610B renewal parts list; oem_spec
Current rating	Used singly for 400 A mains and in pairs for 600 A mains	B	S453 oem_spec
Material	Suitable for Al or Cu conductors	A	same as above
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions		

EDH-GEA-00578	763B795P8	General Electric	lug	OBSOLETE (1969 RENEWAL

GE main lug (with 763B795P9), 225 A row, NLAB/NLTQ/DB

OEM part number	763B795P8	C	S453 oem_spec
Description	Lug listed '(1) 763B795P8 (1) 763B795P9' in main-lug table between 225 A and 400 A rows (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	C	S453 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00579	763B795P9	General Electric	lug	OBSOLETE (1969 RENEWAL

GE main lug (with 763B795P8), NLAB/NLTQ/DB

OEM part number	763B795P9	C	S453 oem_spec
Description	Lug listed '(1) 763B795P8 (1) 763B795P9' in main-lug table (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	C	S453 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00611	**NLAB100PK**	GE NLAB panelboard twin kit NLAB100PK (two 3-pole THQB) - per seller listing	—	unknown

EDH-GEA-00611	NLAB100PK	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

GE NLAB panelboard twin kit NLAB100PK (two 3-pole THQB) - per seller listing

OEM part number	NLAB100PK	C	S627 distributor
Description	Kit OEM # NLAB100PK; obsolete NLAB panelboards, mounts two 3-pole THQB breakers (seller listing)	C	same as above
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BNLAB100GE ('Kit OEM # NLAB100PK; obsolete NLAB panelboards, mounts two 3-pole THQB breakers'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	same as above
Cross-links	Families: NLAB		
Not yet documented	Dimensions, Material, Status		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00590	**NLAB-TQC3**	GE NLAB 3-pole TQC hardware kit	TQC 3-pole C	Discontinued OEM item traded new-surplus / recertified by de

EDH-GEA-00590	NLAB-TQC3	General Electric	breaker-mounting-kit	DISCONTINUED OEM ITEM

GE NLAB 3-pole TQC hardware kit

OEM part number	NLAB-TQC3	C	S444 surplus_listing
Description	GEN; NLAB; 3P; TQC; Hardware Kit; Accessory	C	same as above
Installation location	GE NLAB panelboard	C	same as above
Breaker compatibility	TQC 3-pole	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: NLAB · Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*Dealer-made code (not a GE catalog format) - what is the GE part?*		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00570	**75C140025P104**	GE NLAB/NLTQ/DB neutral and bus support, 100-225 A	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00568	**75C140025P105**	GE NLAB/NLTQ/DB main bus support, 100-600 A copper bus and 100-225 A aluminum bus	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00569	**75C140025P106**	GE NLAB/NLTQ/DB main bus support, 400-600 A aluminum bus	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00571	**75C140032P134**	GE NLAB/NLTQ/DB neutral support, 400-600 A (2 required)	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00572	**75D165029P101T**	GE branch circuit insulator for TBQ and TQL breakers	—	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00570 **75C140025P104** General Electric insulator **OBSOLETE (1969 RENEWAL**

GE NLAB/NLTQ/DB neutral and bus support, 100-225 A

OEM part number	75C140025P104	B	S453 oem_spec
Description	Neutral and bus support, 100-225 amp (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	B	S453 GEG-13610B renewal parts list; oem_spec
Installation location	Panel interior, neutral/bus support	B	S453 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00568 **75C140025P105** General Electric insulator **OBSOLETE (1969 RENEWAL**

GE NLAB/NLTQ/DB main bus support, 100-600 A copper bus and 100-225 A aluminum bus

OEM part number	75C140025P105	B	S453 oem_spec
Description	Main bus support, 100-600A copper bus and 100-225A alum. bus (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	B	S453 GEG-13610B renewal parts list; oem_spec
Installation location	Panel interior, supporting main bus	B	S453 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00569 **75C140025P106** General Electric insulator **OBSOLETE (1969 RENEWAL**

GE NLAB/NLTQ/DB main bus support, 400-600 A aluminum bus

OEM part number	75C140025P106	B	S453 oem_spec
Description	Main bus support, 400-600A alum. bus (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	B	S453 GEG-13610B renewal parts list; oem_spec
Installation location	Panel interior, supporting main bus	B	S453 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00571	75C140032P134	General Electric	insulator	OBSOLETE (1969 RENEWAL

GE NLAB/NLTQ/DB neutral support, 400-600 A (2 required)

OEM part number	75C140032P134	B	S453 oem_spec
Description	Neutral support 400-600 amp (requires 2 supports) (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	B	S453 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00572	75D165029P101T	General Electric	insulator	OBSOLETE (1969 RENEWAL

GE branch circuit insulator for TBQ and TQL breakers

OEM part number	75D165029P101T	B	S453 oem_spec
Description	Branch circuit insulator for TBQ and TQL breakers (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	B	S453 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB · Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	current_availability, Dimensions, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00585	**359L481G1**	GE panelboard trim clamps, package of 4	—	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00585	359L481G1	General Electric	hardware-kit	OBSOLETE (1969 RENEWAL

GE panelboard trim clamps, package of 4

OEM part number	359L481G1	A	S453 oem_spec
Description	Trim clamps, package of 4	A	S453 GEG-13610B renewal parts list; oem_spec
Installation location	Front (trim) to box attachment; standard fronts use trim clamps, concealed-trim-clamp fronts use 3/16 hex socket screws	A	S453 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00576	**75C140485P103**	GE screw assembly for bolt-in branch breakers (one per hole), NLAB/NLTQ/DB	—	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00576	75C140485P103	General Electric	fastener	OBSOLETE (1969 RENEWAL

GE screw assembly for bolt-in branch breakers (one per hole), NLAB/NLTQ/DB

OEM part number	75C140485P103	A	S453 oem_spec
Description	Screw assembly; 'when ordering these breakers, also order one Cat. No. 75C140485P103 screw assembly per hole' (follows breaker rating list 15-100 A)	A	S453 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		
Open question	*Which breaker type in the list requires the screw assembly (likely bolt-on TQB)?*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00589	**HT-100**	GE/Trumbull handle extension for 2-pole operation (lighting panel breakers)	Single-pole breakers in NLTQ / NLAB panels tied for 2-pole operation **B**	Obsolete

EDH-GEA-00589 **HT-100** Trumbull breaker-accessory **OBSOLETE**

GE/Trumbull handle extension for 2-pole operation (lighting panel breakers)

OEM part number	HT-100	**A**	S452 oem_spec
Description	HT-100 Handle Extensions for 2 Pole operation - when ordered individually list price $0.40	**A**	S452 GE Supply 1951 pp.442-443; oem_spec
Breaker compatibility	Single-pole breakers in NLTQ / NLAB panels tied for 2-pole operation	**B**	S452 oem_spec
Status	Obsolete	**D**	inference
Cross-links	Families: NLAB · Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Material		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00581	**113A5356P1**	GE circuit numbering tabs, circuits 1-24	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00582	**113A5357P1**	GE circuit numbering tabs, circuits 1-42	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00584	**75A105457**	GE panelboard directory card holder	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00583	**75B125198P101**	GE panelboard directory card	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00586	**75V100083P101**	GE panelboard door lock, single-point lever handle type with key	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00587	**DPJ2185**	GE panelboard door lock, 3-point vault handle type with key	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00588	**TEU-1**	GE extra key for panelboard door locks	—	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00581 **113A5356P1** General Electric other **OBSOLETE (1969 RENEWAL**

GE circuit numbering tabs, circuits 1-24

OEM part number	113A5356P1	**A**	S453 oem_spec
Description	Circuit numbering tabs, circuit numbers 1 thru 24	**A**	S453 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	**D**	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00582 **113A5357P1** General Electric other **OBSOLETE (1969 RENEWAL**

GE circuit numbering tabs, circuits 1-42

OEM part number	113A5357P1	**A**	S453 oem_spec
Description	Circuit numbering tabs, circuit numbers 1 thru 42	**A**	S453 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	**D**	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00584	75A105457	General Electric	other	OBSOLETE (1969 RENEWAL

GE panelboard directory card holder

OEM part number	75A105457	A	S453 oem_spec
Description	Directory card holder	A	S453 GEG-13610B renewal parts list; oem_spec
Installation location	Inside of door	A	S453 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00583	75B125198P101	General Electric	other	OBSOLETE (1969 RENEWAL

GE panelboard directory card

OEM part number	75B125198P101	A	S453 oem_spec
Description	Directory card	A	S453 GEG-13610B renewal parts list; oem_spec
Installation location	Inside of door	A	S453 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00586	75V100083P101	General Electric	other	OBSOLETE (1969 RENEWAL

GE panelboard door lock, single-point lever handle type with key

OEM part number	75V100083P101	A	S453 oem_spec
Description	Door locks: single point lever handle type with key	A	S453 GEG-13610B renewal parts list; oem_spec
Installation location	Panelboard front door	A	S453 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00587	DPJ2185	General Electric	other	OBSOLETE (1969 RENEWAL

GE panelboard door lock, 3-point vault handle type with key

OEM part number	DPJ2185	A	S453 oem_spec
Description	Door locks: 3-point vault handle type with key	A	S453 GEG-13610B renewal parts list; oem_spec
Installation location	Panelboard front door	A	S453 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00588	TEU-1	General Electric	other	OBSOLETE (1969 RENEWAL

GE extra key for panelboard door locks

OEM part number	TEU-1	A	S453 oem_spec
Description	Extra key for above locks	A	S453 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S453 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

5.8 RG-LIGHTING — ReliaGear lighting panelboards (Types RQ, RE, RL, RS, RD; AD interiors)

FAM-GEA-015 · panelboard · aka ReliaGear lighting panelboard, ReliaGear LP, ReliaGear RQ, ReliaGear RE, ReliaGear RL, ReliaGear RD · markings: ABB, ReliaGear, GE

ABB successor to GE A-Series lighting panelboards (AQ/RQ, AE/RE, AS/RS per ASPSERENT instructions). Accepts Q-line/FB and ABB Tmax XT1/XT2/XT4 and A2 breakers via ASP...3P mounting hardware kits (spools/Z-straps, insulated bracket, phase barriers). Kit catalog prefix ASP carried over from A-Series.

Key documents: S665 1TQC173000E0048 ReliaGear lighting panelboards - Mounting hardware kit for FB and XT2 circuit breakers; S666 1TQC173000Z0024 ReliaGear lighting panelboards - Mounting hardware kit for A2, XT1 and XT4 circuit breaker; S667 1TQC173000Z0022 / DEH41056 ReliaGear Lighting Panelboards - Interior Mounting Kits; S669 1TQC173000E0032 / GEH6518 ASPSERENT - ReliaGear Lighting Panelboard Service Entrance Field Conversion Kit
Also fits this family (entry printed elsewhere): ASPAQLEBKT, EGS12

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-01051	**ASPA23P**	ReliaGear lighting panel mounting kit ASPA23P (A2 3-pole, 225 A)	ABB A2 3-pole (225 A Z-strap) A	unknown
EDH-GEA-01050	**ASPFBRD3P**	ReliaGear lighting panel mounting kit ASPFBRD3P (FB 3-pole)	Record Plus FB 3-pole A	unknown
EDH-GEA-01052	**ASPXT13P**	ReliaGear lighting panel mounting kit ASPXT13P (XT1 3-pole)	ABB Tmax XT1 3-pole A	unknown
EDH-GEA-01049	**ASPXT23P**	ReliaGear lighting panel mounting kit ASPXT23P (XT2 3-pole)	ABB Tmax XT2 3-pole A	unknown
EDH-GEA-01053	**ASPXT43P**	ReliaGear lighting panel mounting kit ASPXT43P (XT4 3-pole, 250 A)	ABB Tmax XT4 3-pole (250 A spool) A	unknown

EDH-GEA-01051	ASPA23P	ABB / GE	breaker-mounting-kit	STATUS UNKNOWN

ReliaGear lighting panel mounting kit ASPA23P (A2 3-pole, 225 A)

OEM part number	ASPA23P	A	S666 Table 1; oem_spec
Description	Mounting hardware kit for three-pole A2 breaker in ReliaGear lighting panelboard (Z-straps)	A	same as above
Breaker compatibility	ABB A2 3-pole (225 A Z-strap)	A	same as above
Kit contents	A2 Z-strap 225 A 30014873564P10 (3); mounting bracket A2 30014876551P19 (1); bracket insulation A2 30014877432P20 (1); M4x55 hex socket head cap screw L15P12055B70 (2); M8 narrow flat washer L400P10B33 (3); M8 helical spring lock washer L401P27B70 (3); M8x25 hex socket button head screw L16P17025B70 (3); thread rolling screw and washer 1/4-20 x 7/8 in 315A7034P3 (3); screw #10-32 x 1/4 in N722P16004B6 (2); phase barrier 80 mm 2 pcs 1SDA066192R1 (1); A2 low terminal cover 1SDA066183R1 (1)	A	same as above
Torque values	M4 breaker-to-bracket screws 9-11 lb-in; Z-strap M8 screws to breaker terminal 64-78 lb-in; #10-32 bracket screws 27-36 lb-in; thread-rolling screws 42 lb-in	A	same as above
OEM instruction document	ABB 1TQC173000Z0024	A	S666 p.1; oem_spec
Cross-links	Families: RG-LIGHTING · Breakers: ABB A2 (Formula A2) molded case breaker		
Not yet documented	Dimensions, Material		

EDH-GEA-01050	ASPFBRD3P	ABB / GE	breaker-mounting-kit	STATUS UNKNOWN

ReliaGear lighting panel mounting kit ASPFBRD3P (FB 3-pole)

OEM part number	ASPFBRD3P	**A**	S665 Table 2; oem_spec
Description	Mounting hardware kit for three phases of FB breaker in ReliaGear lighting panelboard	**A**	same as above
Breaker compatibility	Record Plus FB 3-pole	**A**	same as above
Kit contents	FB spool 10093207P2 (3); #10-32 x 1.88 in pan head screw 10093208P1 (3); FB cover 30019791975P1 (3); FB 3X mounting bracket 30022471264P1 (1); #10-32 x 3/8 thread rolling screw N722P16006B6 (2); cup washer 254V644P1 (4); #8-32 x 2-7/8 screw N80P15046B6 (4)	**A**	same as above
Torque values	Bracket #10-32 screws 40-44 in-lb; #8-32 breaker screw 20 in-lb; #10-32 x 1.88 screws to strap 40-50 in-lb	**A**	same as above
OEM instruction document	ABB 1TQC173000E0048	**A**	S665 p.1; oem_spec
Cross-links	Families: RG-LIGHTING · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Material		

EDH-GEA-01052	ASPXT13P	ABB / GE	breaker-mounting-kit	STATUS UNKNOWN

ReliaGear lighting panel mounting kit ASPXT13P (XT1 3-pole)

OEM part number	ASPXT13P	**A**	S666 Table 2; oem_spec
Description	Mounting hardware kit for three-pole XT1 breaker in ReliaGear lighting panelboard	**A**	same as above
Breaker compatibility	ABB Tmax XT1 3-pole	**A**	same as above
Kit contents	Mounting bracket XT1 30014876551P1 (1); bracket insulation XT1 30014877432P1 (1); M4 socket head cap screw L15EP12065B70 (1); narrow flat washer #10 N402P9B6 (3); lock washer #10 N405P39B6 (3); hex head screw 10-24 x 3/8 N170P17006B70 (3); screw #10-32 x 1/4 N722P16004B6 (2); phase barrier 25 mm 4 pcs 1SDA066192R1 (1) [item 1 not legible in text extraction]	**A**	same as above
Torque values	M4 screw 9-11 lb-in; #10-32 bracket screws 27-33 lb-in; #10-24 x 3/8 screws to spools 42 lb-in	**A**	same as above
OEM instruction document	ABB 1TQC173000Z0024	**A**	S666 p.1; oem_spec
Cross-links	Families: RG-LIGHTING · Breakers: ABB SACE Tmax XT (XT1/XT2/XT4/XT5/XT6/XT7)		
Not yet documented	Dimensions, Material		
Open question	*Table 2 item 1 (probably XT1 spool) missing from text extraction; also phase barrier number 1SDA066192R1 is printed for both 80 mm (A2) and 25 mm (XT1) barriers - verify.*		

EDH-GEA-01049	ASPXT23P	ABB / GE	breaker-mounting-kit	STATUS UNKNOWN

ReliaGear lighting panel mounting kit ASPXT23P (XT2 3-pole)

OEM part number	ASPXT23P	**A**	S665 Table 1; oem_spec
Description	Mounting hardware kit for three-pole XT2 breaker in ReliaGear lighting panelboard (spools on ON-side terminals into plastic base; insulated mounting bracket on OFF side)	**A**	same as above
Breaker compatibility	ABB Tmax XT2 3-pole	**A**	same as above
Kit contents	XT2 left/center/right spools 30014873564P10, 30014876551P19, 30014877432P20 (1 each); #10-32 x 1/2 recessed flat head screw N84P16008B6 (3); XT2 left/center/right covers 30019791975P2/P3/P4; #10-24 x 3/8 hex socket head screw 30021425143P1 (3); XT2 mounting bracket 30020170827P1; bracket insulation 30020170828P1; #6-32 x 3 3/4 pan head screw 30023310084P1 (2); load phase barrier 1SDA075914R1 (2); line phase barrier 30021918602P1 (2); #10-32 x 3/8 thread rolling screw N722P16006B6 (2)	**A**	same as above
Torque values	Breaker to bracket #6-32 screws 9-11 in-lb; spools to breaker terminals 27-33 in-lb; #10-32 bracket screws 40-44 in-lb; #10-24 self-rolling screws 40-50 in-lb	**A**	same as above
OEM instruction document	ABB 1TQC173000E0048	**A**	S665 p.1; oem_spec
Cross-links	Families: RG-LIGHTING · Breakers: ABB SACE Tmax XT (XT1/XT2/XT4/XT5/XT6/XT7)		
Not yet documented	Dimensions, Material		
Open question	*Spool part numbers in 1TQC173000E0048 Table 1 (30014873564P10/30014876551P19/30014877432P20) are identical to the A2 Z-strap/bracket/insulation numbers in 1TQC173000Z0024 Table 1 - one table is likely a copy error.*		

EDH-GEA-01053	ASPXT43P	ABB / GE	breaker-mounting-kit	STATUS UNKNOWN

ReliaGear lighting panel mounting kit ASPXT43P (XT4 3-pole, 250 A)

OEM part number	ASPXT43P	A	S666 Table 3; oem_spec
Description	Mounting hardware kit for three-pole XT4 breaker in ReliaGear lighting panelboard	A	same as above
Breaker compatibility	ABB Tmax XT4 3-pole (250 A spool)	A	same as above
Kit contents	XT4 rectangular spool 250 A 30014876527P2 (3); mounting bracket XT4 30014876551P2 (1); bracket insulation XT4 30014877432P2 (1); hex socket head screw 6-32 x 3 in N170P13048B70 (2); flat washer 1/4 N402P41B6 (3); lock washer 1/4 N405P41B6 (3); hex socket head screw 1/4-20 x 5/8 N170P21010B70 (3); thread-rolling screw and washer 1/4-20 x 7/8 315A7034P6 (3); screw #10-32 x 1/4 N722P16004B6 (2); phase barrier 25 mm 4 pcs 1SDA075914R1 (1)	A	same as above
Torque values	See 1TQC173000Z0024 XT4 steps (figures 5-6); not fully legible in text extraction	A	same as above
OEM instruction document	ABB 1TQC173000Z0024	A	S666 p.1; oem_spec
Cross-links	Families: RG-LIGHTING · Breakers: ABB SACE Tmax XT (XT1/XT2/XT4/XT5/XT6/XT7)		
Not yet documented	Dimensions, Material		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-01057	**EGC12**	Insulated equipment ground kit EGC12 (ReliaGear RQ/RL/RE)	—	unknown

EDH-GEA-01057	EGC12	ABB / GE	ground-bar	STATUS UNKNOWN

Insulated equipment ground kit EGC12 (ReliaGear RQ/RL/RE)

OEM part number	EGC12	A	S670 p.1; oem_spec
Description	Insulated equipment ground kit (Cat. No. EGS12/EGC12) for ReliaGear lighting panelboard types RQ, RL, RE; barrier placed first, kit mounted in backwall holes with two #10 thread-forming screws; identification label adjacent to ground bar barrier	A	same as above
OEM instruction document	1TQC173000E0023 / GEH5037 (APR 2024)	A	same as above
Cross-links	Families: RG-LIGHTING		
Not yet documented	circuits, Dimensions, wire range		
Open question	*Difference between EGS12 and EGC12 not stated.*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-01055	**ASPQTRK**	ReliaGear lighting panelboard flush cylinder quarter-turn lock kit ASPQTRK	—	unknown
EDH-GEA-01054	**ASPQTRT**	ReliaGear lighting panelboard t-handle quarter-turn lock kit ASPQTRT	—	unknown
EDH-GEA-01056	**ASPSERENT**	ReliaGear / A-Series service entrance field conversion kit ASPSERENT	—	unknown

EDH-GEA-01055	ASPQTRK	ABB / GE	hardware-kit	STATUS UNKNOWN

ReliaGear lighting panelboard flush cylinder quarter-turn lock kit ASPQTRK

OEM part number	ASPQTRK	A	S668 p.1; oem_spec
Description	Flush cylinder quarter-turn lock kit for ReliaGear lighting panelboard fronts	A	same as above
Kit contents	Cylinder quarter-turn 4600311522P1 (2); shim 30019169881P1 (2); cam latch E5-6006 (2); keys 569B737P5 (2)	A	S668 Table 1/2; oem_spec
Torque values	Mounting nut 88 lb-in; M6 cam screw 55 lb-in	A	S668 p.1; oem_spec
Cross-links	Families: RG-LIGHTING		
Not yet documented	Dimensions		

EDH-GEA-01054	ASPQTRT	ABB / GE	hardware-kit	STATUS UNKNOWN

ReliaGear lighting panelboard t-handle quarter-turn lock kit ASPQTRT

OEM part number	ASPQTRT	A	S668 p.1; oem_spec
Description	T-handle quarter-turn lock kit for ReliaGear lighting panelboard fronts	A	same as above
Kit contents	T-handle quarter-turn 4600311519P1 (2); shim 30019169881P1 (2); cam latch E5-6006 (2); keys 569B737P5 (2)	A	S668 Table 1/2; oem_spec
Torque values	Mounting nut 88 lb-in; M6 cam screw 55 lb-in	A	S668 p.1; oem_spec
Cross-links	Families: RG-LIGHTING		
Not yet documented	Dimensions		

EDH-GEA-01056	ASPSERENT	ABB / GE	hardware-kit	STATUS UNKNOWN

ReliaGear / A-Series service entrance field conversion kit ASPSERENT

OEM part number	ASPSERENT	A	S669 p.1; oem_spec
Description	Service entrance field conversion kit for AQ/RQ, AE/RE and AS/RS panelboards with bolt-in breakers: one-way screws in branch line straps (all phases) and labels to convert main-lug-only panels (six-disconnect rule) where allowed by code	A	same as above
Kit contents	One-way screws #10-32 192A6976P99 (18); "Do Not Remove" labels 192A7029P700 (18); service entrance label 315A7219P1 (1); service disconnect label 569B806P5 (1)	A	same as above
OEM instruction document	1TQC173000E0032 / GEH6518 (Jan 2025)	A	same as above
Cross-links	Families: RG-LIGHTING, A-SERIES		
Not yet documented	Dimensions		

5.9 RG-NEXT — ReliaGear neXT Power Panelboards

FAM-GEA-008 · panelboard · aka ReliaGear OEM neXT, ReliaGear neXT · markings: ABB, GE

ABB's post-2018 power panelboard (doc 1SXU900191B0201, 2022). ABB states there is a single catalog number for all circuit breaker installation kits; that number was not found in accessible sources.

Attribute	Value	Cl.	Sources
Voltage rating	up to 600 Vac 3ph3w / 600Y/347 V	A	S158 oem_spec
Main ampacity	Bus 250-1200 A Cu or Al; MLO, MCB (vertical or horizontal) or feed-through lug pads	A	same as above
Branch breakers accepted	Tmax XT1/XT4/XT5/XT6/XT7, Record Plus FB (FBV/FBN/FBH/FBL), TEY (TEYD/TEYH/TEYL); 15-1200 A	A	same as above
Dimensions	One X-space for ReliaGear neXT = 1.385 in; standard interior heights 16X, 24X, 32X, 40X; interiors double sided; enclosure widths 30 in (center), 40 in (offset), 45 in (offset or center)	A	S427 guide p.20; oem_spec
Material	Interiors: tin- and silver-plated aluminum (heat rated) or tin- and silver-plated copper (heat rated or 1000 A/sq in density rated)	A	same as above
X space	Single XT1 3X; two XT1 5X; five XT1 11X; XT4 3X; XT5 4X; XT6 6X; XT7 6X; FB/TEY 1P 1X, 2P 2X; SPD 10X; RELT 3X; AMP1 main meter 4X	A	S427 guide p.21; oem_spec
Torque values	Breaker mounting screws 35-40 lb-in (3.9-4.5 N-m); dual main mechanical lugs to pads 200 lb-in (23 N-m); main lug barrier screws 30-35 lb-in; IP20 barrier HMR rail kit 50-60 lb-in, barrier/brackets 35-40 lb-in	A	S672, S674, S675 various; oem_spec
Breaker mounting	XT1/XT2/XT4 and XT5/XT6/XT7 breakers carry mounting brackets with clearance holes and screwdriver slots for insertion into/removal from the bus stack; legacy IF-series frames also accommodated; 2 mounting screws per breaker	A	S672 p.1; oem_spec

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), TEY / TEYF / TEYD / TEYH / TEYL

Key documents: S158 1SXU900191B0201 ReliaGear neXT Power Panelboards (brochure); S161 BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (o; S427 ABB Quick Selector Guide - Small Projects (distributor edition, Viking Electric) - incl. T; S428 ReliaGear neXT power panelboards - typical layouts / X-space brochure; S671 1SQC900015M0201 ReliaGear neXT Panelboard - Replacement Part Instructions; S672 1SQC900028M0201 ReliaGear neXT - Breaker Installation & Removal Instruction Sheet; S674 1SQC900009M0201 ReliaGear neXT - Dual Main Lugs; S675 1SQC900024M0201 ReliaGear neXT - IP20 Main Lug Barrier Installation Instructions

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-01058	**RGRPIFRK**	ReliaGear neXT retrofit bracket kit RGRPIFRK (XT5/XT6/XT7)	ABB Tmax XT5, XT6, XT7 A	unknown

EDH-GEA-01058	RGRPIFRK	ABB	breaker-mounting-kit	STATUS UNKNOWN

ReliaGear neXT retrofit bracket kit RGRPIFRK (XT5/XT6/XT7)

OEM part number	RGRPIFRK	A	S673 p.1; oem_spec
Description	Retrofit bracket kit for XT5, XT6 and XT7 breaker frames in ReliaGear neXT panelboards; bracket positioned on frame centred with breaker per layout drawing, fits rear slot of breaker mounting bracket and is used with a screwdriver to push/pull breaker into/out of bus stack; bracket remains in panel	A	S673 pp.1-5; oem_spec
Breaker compatibility	ABB Tmax XT5, XT6, XT7	A	S673 p.1; oem_spec
Kit contents	Retrofit bracket (5); mounting screws (5)	A	same as above
Torque values	Breaker mounting screws 35-40 lb-in (3.9-4.5 N-m)	A	S673 p.4; oem_spec
Cross-links	Families: RG-NEXT · Breakers: ABB SACE Tmax XT (XT1/XT2/XT4/XT5/XT6/XT7)		
Not yet documented	Dimensions, Material		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00564	**SR1XBF**	ReliaGear neXT XT1 mounting bracket SR1XBF	ABB Tmax XT1 (125 A, 3P) A	unknown
EDH-GEA-00565	**SR2XBF**	ReliaGear neXT XT1 mounting bracket SR2XBF	ABB Tmax XT1 (125 A, 3P) A	unknown
EDH-GEA-00566	**SR5XBF**	ReliaGear neXT XT1 mounting bracket SR5XBF	ABB Tmax XT1 (125 A, 3P) A	unknown

EDH-GEA-00564	SR1XBF	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

ReliaGear neXT XT1 mounting bracket SR1XBF

OEM part number	SR1XBF	A	S427, S428 guide p.21; oem_spec
Description	ReliaGear neXT XT1 group mounting bracket (Single XT1), 3X space; included in factory panel orders, sold separately when adding XT1 breakers to an existing installation	A	S427, S428 guide p.21; typicals p.3-4; oem_spec
Breaker compatibility	ABB Tmax XT1 (125 A, 3P)	A	S427 guide p.21; oem_spec
Dimensions	3X (1X = 1.385 in)	A	S427 guide pp.20-21; oem_spec
Cross-links	Families: RG-NEXT		
Not yet documented	Kit contents, Material, Torque values		

EDH-GEA-00565	SR2XBF	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

ReliaGear neXT XT1 mounting bracket SR2XBF

OEM part number	SR2XBF	A	S427, S428 guide p.21; oem_spec
Description	ReliaGear neXT XT1 group mounting bracket (Two XT1), 5X space; included in factory panel orders, sold separately when adding XT1 breakers to an existing installation	A	S427, S428 guide p.21; typicals p.3-4; oem_spec
Breaker compatibility	ABB Tmax XT1 (125 A, 3P)	A	S427 guide p.21; oem_spec
Dimensions	5X (1X = 1.385 in)	A	S427 guide pp.20-21; oem_spec
Cross-links	Families: RG-NEXT		
Not yet documented	Kit contents, Material, Torque values		

EDH-GEA-00566	SR5XBF	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

ReliaGear neXT XT1 mounting bracket SR5XBF

OEM part number	SR5XBF	A	S427, S428 guide p.21; oem_spec
Description	ReliaGear neXT XT1 group mounting bracket (Five XT1), 11X space; included in factory panel orders, sold separately when adding XT1 breakers to an existing installation	A	S427, S428 guide p.21; typicals p.3-4; oem_spec
Breaker compatibility	ABB Tmax XT1 (125 A, 3P)	A	S427 guide p.21; oem_spec
Dimensions	11X (1X = 1.385 in)	A	S427 guide pp.20-21; oem_spec
Cross-links	Families: RG-NEXT		
Not yet documented	Kit contents, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-01059	**RGRPDPIN**	ReliaGear neXT replacement kit RGRPDPIN	—	unknown
EDH-GEA-01060	**RGRPTSCR**	ReliaGear neXT replacement kit RGRPTSCR	—	unknown

EDH-GEA-01059	RGRPDPIN	ABB	fastener	STATUS UNKNOWN

ReliaGear neXT replacement kit RGRPDPIN

OEM part number	RGRPDPIN	A	S671 p.1; oem_spec
Description	Replacement door pins for gutter door hinges (kit; 6X)	A	S671 p.1-2; oem_spec
Kit contents	6X	A	S671 p.1; oem_spec
Cross-links	Families: RG-NEXT		
Not yet documented	Dimensions		

EDH-GEA-01060	RGRPTSCR	ABB	fastener	STATUS UNKNOWN

ReliaGear neXT replacement kit RGRPTSCR

OEM part number	RGRPTSCR	A	S671 p.1; oem_spec
Description	Replacement thread-forming screws (kit; 10X): 1.25 in long for fronts, breakers and panel-mounted accessories; 3/8 in long for all other connections	A	S671 p.1-2; oem_spec
Kit contents	10X	A	S671 p.1; oem_spec
Torque values	50-60 lb-in for connections to enclosure or gutter doors; 35-40 lb-in for all other connections	A	S671 p.2; oem_spec
Cross-links	Families: RG-NEXT		
Not yet documented	Dimensions		

5.10 SCP-PLUS — Spectra Series Type SCP Plus panelboards

FAM-GEA-005 · panelboard · aka SCP, SCP+ · markings: GE

Spectra-family power panel variant with its own ACB boxes (31 and 40 in wide x 11.5 in deep), ACF fronts, ACTMK/ACSMK mounting hardware kits (hardware + straps), ACTFPK/ACSFPK filler kits and ACTHK/ACSHK single-breaker hardware. Filler plates for SCP+ are to be ordered from the Houston equipment plant.

Attribute	Value	Cl.	Sources
Box	ACB31xxxx 31 in W x 11.5 in D; ACB40xxxx 40 in W x 11.5 in D; X heights 15-42	A	S143 p.11-48; oem_spec

Breaker families associated: Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TJD / TJJ / TJK / THJK

Key documents: S143 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00254	**ACSMKSG**	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, single)	SGD, SGH, SGL, SGP A	unknown
EDH-GEA-00255	**ACSMKSK**	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	SKH, SKL A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00910	**ACSMKTB4**	Spectra SCP Plus mounting hardware kit and straps ACSMKTB4 (TB4, single mounted)	TB4 **A**	unknown
EDH-GEA-00911	**ACSMKTB6**	Spectra SCP Plus mounting hardware kit and straps ACSMKTB6 (TB6, single mounted)	TB6 **A**	unknown
EDH-GEA-00912	**ACSMKTB8**	Spectra SCP Plus mounting hardware kit and straps ACSMKTB8 (TB8, single mounted)	TB8 **A**	unknown
EDH-GEA-00246	**ACTMKEB1P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dual)	TEB, TED, THED **A**	unknown
EDH-GEA-00247	**ACTMKEB2P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dual)	TEB, TED, THED **A**	unknown
EDH-GEA-00248	**ACTMKEB3P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dual)	TEB, TED, THED **A**	unknown
EDH-GEA-00252	**ACTMKJD**	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	TJD, TJJ, TJK **A**	unknown
EDH-GEA-00250	**ACTMKQD2P**	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00251	**ACTMKQD3P**	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00245	**ACTMKSE**	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED, SEP, dual)	SHE (SEH), SEL, SED, SEP **A**	unknown
EDH-GEA-00249	**ACTMKSF**	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, dual)	TFK, SFH, SFL, SFP **A**	unknown
EDH-GEA-00253	**ACTMKSG**	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, dual)	SGD, SGH, SGL, SGP **A**	unknown

EDH-GEA-00254 — ACSMKSG

GE — branch-connector-kit — **STATUS UNKNOWN**

Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, single)

OEM part number	ACSMKSG	**A**	S143 p.11-48; oem_spec
Alternate / superseded numbers	ACSFPKSG [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACSHKSG [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, single mounted, SGD, SGH, SGL, SGP, 400/800 A	**A**	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	**A**	same as above
Current rating	400/800 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACSFPKSG listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00255 — ACSMKSK

GE — branch-connector-kit — **STATUS UNKNOWN**

Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)

OEM part number	ACSMKSK	**A**	S143 p.11-48; oem_spec
Alternate / superseded numbers	ACSFPKSK [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACSHKSK [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, single mounted, SKH, SKL, 800/1200 A	**A**	same as above
Breaker compatibility	SKH, SKL	**A**	same as above
Current rating	800/1200 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACSFPKSK listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00910	ACSMKTB4	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACSMKTB4 (TB4, single mounted)

OEM part number	ACSMKTB4	**A**	S650 9-115; oem_spec
Description	Mounting hardware kit and straps, SCP Plus panelboard, single mounted TB4 breaker, 400 A	**A**	S650 9-115 "Mounting Hardware-Hardware Kit and Straps"; oem_spec
Breaker compatibility	TB4	**A**	S650 9-115; oem_spec
Cross-links	Families: SCP-PLUS · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00911	ACSMKTB6	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACSMKTB6 (TB6, single mounted)

OEM part number	ACSMKTB6	**A**	S650 9-115; oem_spec
Description	Mounting hardware kit and straps, SCP Plus panelboard, single mounted TB6 breaker, 600 A	**A**	S650 9-115 "Mounting Hardware-Hardware Kit and Straps"; oem_spec
Breaker compatibility	TB6	**A**	S650 9-115; oem_spec
Cross-links	Families: SCP-PLUS · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00912	ACSMKTB8	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACSMKTB8 (TB8, single mounted)

OEM part number	ACSMKTB8	**A**	S650 9-115; oem_spec
Description	Mounting hardware kit and straps, SCP Plus panelboard, single mounted TB8 breaker, 800 A	**A**	S650 9-115 "Mounting Hardware-Hardware Kit and Straps"; oem_spec
Breaker compatibility	TB8	**A**	S650 9-115; oem_spec
Cross-links	Families: SCP-PLUS · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00246	ACTMKEB1P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dual)

OEM part number	ACTMKEB1P	**A**	S143 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB1P [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKEB1P [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 1-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB1P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00247	ACTMKEB2P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dual)

OEM part number	ACTMKEB2P	**A**	S143 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB2P [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKEB2P [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 2-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB2P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00248	ACTMKEB3P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dual)

OEM part number	ACTMKEB3P	**A**	S143 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB3P [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKEB3P [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 3-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB3P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00252	ACTMKJD	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)

OEM part number	ACTMKJD	**A**	S143 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKJD [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKJD [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TJD, TJJ, TJK, 400 A	**A**	same as above
Breaker compatibility	TJD, TJJ, TJK	**A**	same as above
Current rating	400 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKJD listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00250	ACTMKQD2P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)

OEM part number	ACTMKQD2P	A	S143 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKQD2P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKQD2P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TQD, THQD, 225 A, 2-pole	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Current rating	225 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKQD2P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00251	ACTMKQD3P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)

OEM part number	ACTMKQD3P	A	S143 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKQD3P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKQD3P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TQD, THQD, 225 A, 3-pole	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Current rating	225 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKQD3P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00245	ACTMKSE	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED, SEP, dual)

OEM part number	ACTMKSE	A	S143 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSE [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSE [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, SHE (SEH), SEL, SED, SEP, 150 A	A	same as above
Breaker compatibility	SHE (SEH), SEL, SED, SEP	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSE listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00249	ACTMKSF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, dual)

OEM part number	ACTMKSF	**A**	S143 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSF [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKSF [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TFK, SFH, SFL, SFP, 250 A	**A**	same as above
Breaker compatibility	TFK, SFH, SFL, SFP	**A**	same as above
Current rating	250 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSF listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00253	ACTMKSG	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, dual)

OEM part number	ACTMKSG	**A**	S143 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSG [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKSG [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, SGD, SGH, SGL, SGP, 400/600 A	**A**	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	**A**	same as above
Current rating	400/600 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSG listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00905	**ACSFPKSG**	Spectra SCP Plus filler plate and filler hardware ACSFPKSG (SGD, single mounted)	SGD, SGH, SGL, SGP **A**	unknown
EDH-GEA-00907	**ACSFPKSK**	Spectra SCP Plus filler plate and filler hardware ACSFPKSK (SKH, single mounted)	SKH, SKL **A**	unknown
EDH-GEA-00909	**ACSFPKTB4**	Spectra SCP Plus filler plate and filler hardware ACSFPKTB4 (TB4, single mounted)	TB4 **A**	unknown
EDH-GEA-00889	**ACTFPKEB1P**	Spectra SCP Plus filler plate and filler hardware ACTFPKEB1P (TEB, dual mounted)	TEB, TED, THED (1-pole) **A**	unknown
EDH-GEA-00891	**ACTFPKEB2P**	Spectra SCP Plus filler plate and filler hardware ACTFPKEB2P (TEB, dual mounted)	TEB, TED, THED (2-pole) **A**	unknown
EDH-GEA-00893	**ACTFPKEB3P**	Spectra SCP Plus filler plate and filler hardware ACTFPKEB3P (TEB, dual mounted)	TEB, TED, THED (3-pole) **A**	unknown
EDH-GEA-00901	**ACTFPKJD**	Spectra SCP Plus filler plate and filler hardware ACTFPKJD (TJD, dual mounted)	TJD, TJJ, TJK **A**	unknown
EDH-GEA-00897	**ACTFPKQD2P**	Spectra SCP Plus filler plate and filler hardware ACTFPKQD2P (TQD, dual mounted)	TQD, THQD (2-pole) **A**	unknown
EDH-GEA-00899	**ACTFPKQD3P**	Spectra SCP Plus filler plate and filler hardware ACTFPKQD3P (TQD, dual mounted)	TQD, THQD (3-pole) **A**	unknown
EDH-GEA-00887	**ACTFPKSE**	Spectra SCP Plus filler plate and filler hardware ACTFPKSE (SHE (SEH), dual mounted)	SHE (SEH), SEL, SED, SEP **A**	unknown
EDH-GEA-00895	**ACTFPKSF**	Spectra SCP Plus filler plate and filler hardware ACTFPKSF (TFK, dual mounted)	TFK, SFH, SFL, SFP **A**	unknown
EDH-GEA-00903	**ACTFPKSG**	Spectra SCP Plus filler plate and filler hardware ACTFPKSG (SGD, dual mounted)	SGD, SGH, SGL, SGP **A**	unknown
EDH-GEA-00276	**SCPFP1**	SCP+ panelboard filler plate 1X	—	unknown
EDH-GEA-00277	**SCPFP2**	SCP+ panelboard filler plate 2X	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00278	**SCPFP3**	SCP+ panelboard filler plate 3X	—	unknown
EDH-GEA-00279	**SCPFP5**	SCP+ panelboard filler plate 5X	—	unknown

EDH-GEA-00905 ACSFPKSG GE filler-plate STATUS UNKNOWN

Spectra SCP Plus filler plate and filler hardware ACSFPKSG (SGD, single mounted)

OEM part number	ACSFPKSG	**A**	S650 9-115; oem_spec
Description	Filler plate and filler hardware, SCP Plus panelboard, single mounted, SGD, SGH, SGL, SGP, max 400, 800 A	**A**	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	**A**	same as above
Current rating	400, 800 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*2008 note: "If filler plates for SCP+ panels are required, please contact Houston equipment plant." - check whether ACT/ACS FPK kits remained orderable.*		

EDH-GEA-00907 ACSFPKSK GE filler-plate STATUS UNKNOWN

Spectra SCP Plus filler plate and filler hardware ACSFPKSK (SKH, single mounted)

OEM part number	ACSFPKSK	**A**	S650 9-115; oem_spec
Description	Filler plate and filler hardware, SCP Plus panelboard, single mounted, SKH, SKL, max 800, 1200 A	**A**	same as above
Breaker compatibility	SKH, SKL	**A**	same as above
Current rating	800, 1200 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*2008 note: "If filler plates for SCP+ panels are required, please contact Houston equipment plant." - check whether ACT/ACS FPK kits remained orderable.*		

EDH-GEA-00909 ACSFPKTB4 GE filler-plate STATUS UNKNOWN

Spectra SCP Plus filler plate and filler hardware ACSFPKTB4 (TB4, single mounted)

OEM part number	ACSFPKTB4	**A**	S650 9-115; oem_spec
Description	Filler plate and filler hardware, SCP Plus panelboard, single mounted, TB4, max 400 A	**A**	same as above
Breaker compatibility	TB4	**A**	same as above
Current rating	400 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*2008 note: "If filler plates for SCP+ panels are required, please contact Houston equipment plant." - check whether ACT/ACS FPK kits remained orderable.*		

EDH-GEA-00889 ACTFPKEB1P GE filler-plate STATUS UNKNOWN

Spectra SCP Plus filler plate and filler hardware ACTFPKEB1P (TEB, dual mounted)

OEM part number	ACTFPKEB1P	**A**	S650 9-115; oem_spec
Description	Filler plate and filler hardware, SCP Plus panelboard, dual mounted, TEB, TED, THED, max 150 A, 1-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED (1-pole)	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*2008 note: "If filler plates for SCP+ panels are required, please contact Houston equipment plant." - check whether ACT/ACS FPK kits remained orderable.*		

EDH-GEA-00891	ACTFPKEB2P	GE	filler-plate	STATUS UNKNOWN

Spectra SCP Plus filler plate and filler hardware ACTFPKEB2P (TEB, dual mounted)

OEM part number	ACTFPKEB2P	**A**	S650 9-115; oem_spec
Description	Filler plate and filler hardware, SCP Plus panelboard, dual mounted, TEB, TED, THED, max 150 A, 2-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED (2-pole)	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*2008 note: "If filler plates for SCP+ panels are required, please contact Houston equipment plant." - check whether ACT/ACS FPK kits remained orderable.*		

EDH-GEA-00893	ACTFPKEB3P	GE	filler-plate	STATUS UNKNOWN

Spectra SCP Plus filler plate and filler hardware ACTFPKEB3P (TEB, dual mounted)

OEM part number	ACTFPKEB3P	**A**	S650 9-115; oem_spec
Description	Filler plate and filler hardware, SCP Plus panelboard, dual mounted, TEB, TED, THED, max 150 A, 3-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED (3-pole)	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*2008 note: "If filler plates for SCP+ panels are required, please contact Houston equipment plant." - check whether ACT/ACS FPK kits remained orderable.*		

EDH-GEA-00901	ACTFPKJD	GE	filler-plate	STATUS UNKNOWN

Spectra SCP Plus filler plate and filler hardware ACTFPKJD (TJD, dual mounted)

OEM part number	ACTFPKJD	**A**	S650 9-115; oem_spec
Description	Filler plate and filler hardware, SCP Plus panelboard, dual mounted, TJD, TJJ, TJK, max 400 A	**A**	same as above
Breaker compatibility	TJD, TJJ, TJK	**A**	same as above
Current rating	400 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*2008 note: "If filler plates for SCP+ panels are required, please contact Houston equipment plant." - check whether ACT/ACS FPK kits remained orderable.*		

EDH-GEA-00897	ACTFPKQD2P	GE	filler-plate	STATUS UNKNOWN

Spectra SCP Plus filler plate and filler hardware ACTFPKQD2P (TQD, dual mounted)

OEM part number	ACTFPKQD2P	**A**	S650 9-115; oem_spec
Description	Filler plate and filler hardware, SCP Plus panelboard, dual mounted, TQD, THQD, max 225 A, 2-pole	**A**	same as above
Breaker compatibility	TQD, THQD (2-pole)	**A**	same as above
Current rating	225 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*2008 note: "If filler plates for SCP+ panels are required, please contact Houston equipment plant." - check whether ACT/ACS FPK kits remained orderable.*		

EDH-GEA-00899	ACTFPKQD3P	GE	filler-plate	STATUS UNKNOWN

Spectra SCP Plus filler plate and filler hardware ACTFPKQD3P (TQD, dual mounted)

OEM part number	ACTFPKQD3P	**A**	S650 9-115; oem_spec
Description	Filler plate and filler hardware, SCP Plus panelboard, dual mounted, TQD, THQD, max 225 A, 3-pole	**A**	same as above
Breaker compatibility	TQD, THQD (3-pole)	**A**	same as above
Current rating	225 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*2008 note: "If filler plates for SCP+ panels are required, please contact Houston equipment plant." - check whether ACT/ACS FPK kits remained orderable.*		

EDH-GEA-00887	ACTFPKSE	GE	filler-plate	STATUS UNKNOWN

Spectra SCP Plus filler plate and filler hardware ACTFPKSE (SHE (SEH), dual mounted)

OEM part number	ACTFPKSE	**A**	S650 9-115; oem_spec
Description	Filler plate and filler hardware, SCP Plus panelboard, dual mounted, SHE (SEH), SEL, SED, SEP, max 150 A	**A**	same as above
Breaker compatibility	SHE (SEH), SEL, SED, SEP	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*2008 note: "If filler plates for SCP+ panels are required, please contact Houston equipment plant." - check whether ACT/ACS FPK kits remained orderable.*		

EDH-GEA-00895	ACTFPKSF	GE	filler-plate	STATUS UNKNOWN

Spectra SCP Plus filler plate and filler hardware ACTFPKSF (TFK, dual mounted)

OEM part number	ACTFPKSF	**A**	S650 9-115; oem_spec
Description	Filler plate and filler hardware, SCP Plus panelboard, dual mounted, TFK, SFH, SFL, SFP, max 250 A	**A**	same as above
Breaker compatibility	TFK, SFH, SFL, SFP	**A**	same as above
Current rating	250 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TFJ / TFK / THFK / TFL, Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*2008 note: "If filler plates for SCP+ panels are required, please contact Houston equipment plant." - check whether ACT/ACS FPK kits remained orderable.*		

EDH-GEA-00903	ACTFPKSG	GE	filler-plate	STATUS UNKNOWN

Spectra SCP Plus filler plate and filler hardware ACTFPKSG (SGD, dual mounted)

OEM part number	ACTFPKSG	**A**	S650 9-115; oem_spec
Description	Filler plate and filler hardware, SCP Plus panelboard, dual mounted, SGD, SGH, SGL, SGP, max 400, 600 A	**A**	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	**A**	same as above
Current rating	400, 600 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*2008 note: "If filler plates for SCP+ panels are required, please contact Houston equipment plant." - check whether ACT/ACS FPK kits remained orderable.*		

EDH-GEA-00276	SCPFP1	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 1X

OEM part number	SCPFP1	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 1X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00277	SCPFP2	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 2X

OEM part number	SCPFP2	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 2X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00278	SCPFP3	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 3X

OEM part number	SCPFP3	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 3X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00279	SCPFP5	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 5X

OEM part number	SCPFP5	A	S143 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 5X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00933	**ACF3149S**	Spectra SCP Plus surface front ACF3149S (31 in box, 15X)	—	unknown
EDH-GEA-00934	**ACF3153S**	Spectra SCP Plus surface front ACF3153S (31 in box, 18X)	—	unknown
EDH-GEA-00935	**ACF3157S**	Spectra SCP Plus surface front ACF3157S (31 in box, 21X)	—	unknown
EDH-GEA-00936	**ACF3161S**	Spectra SCP Plus surface front ACF3161S (31 in box, 24X)	—	unknown
EDH-GEA-00937	**ACF3165S**	Spectra SCP Plus surface front ACF3165S (31 in box, 27X)	—	unknown
EDH-GEA-00938	**ACF3170S**	Spectra SCP Plus surface front ACF3170S (31 in box, 30X)	—	unknown
EDH-GEA-00939	**ACF3174S**	Spectra SCP Plus surface front ACF3174S (31 in box, 33X)	—	unknown
EDH-GEA-00940	**ACF3178S**	Spectra SCP Plus surface front ACF3178S (31 in box, 36X)	—	unknown
EDH-GEA-00941	**ACF3182S**	Spectra SCP Plus surface front ACF3182S (31 in box, 39X)	—	unknown
EDH-GEA-00942	**ACF3186S**	Spectra SCP Plus surface front ACF3186S (31 in box, 42X)	—	unknown
EDH-GEA-00943	**ACF4049S**	Spectra SCP Plus surface front ACF4049S (40 in box, 15X)	—	unknown
EDH-GEA-00944	**ACF4053S**	Spectra SCP Plus surface front ACF4053S (40 in box, 18X)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00945	**ACF4057S**	Spectra SCP Plus surface front ACF4057S (40 in box, 21X)	—	unknown
EDH-GEA-00946	**ACF4061S**	Spectra SCP Plus surface front ACF4061S (40 in box, 24X)	—	unknown
EDH-GEA-00947	**ACF4065S**	Spectra SCP Plus surface front ACF4065S (40 in box, 27X)	—	unknown
EDH-GEA-00948	**ACF4070S**	Spectra SCP Plus surface front ACF4070S (40 in box, 30X)	—	unknown
EDH-GEA-00949	**ACF4074S**	Spectra SCP Plus surface front ACF4074S (40 in box, 33X)	—	unknown
EDH-GEA-00950	**ACF4078S**	Spectra SCP Plus surface front ACF4078S (40 in box, 36X)	—	unknown
EDH-GEA-00951	**ACF4082S**	Spectra SCP Plus surface front ACF4082S (40 in box, 39X)	—	unknown
EDH-GEA-00952	**ACF4086S**	Spectra SCP Plus surface front ACF4086S (40 in box, 42X)	—	unknown

EDH-GEA-00933 — ACF3149S — GE — trim — STATUS UNKNOWN

Spectra SCP Plus surface front ACF3149S (31 in box, 15X)

OEM part number	ACF3149S	**A**	S650 9-115; oem_spec
Description	SCP Plus front for 31 in W x 11.5 in D box, 15X, box height 49.375 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF3149F orderable?*		

EDH-GEA-00934 — ACF3153S — GE — trim — STATUS UNKNOWN

Spectra SCP Plus surface front ACF3153S (31 in box, 18X)

OEM part number	ACF3153S	**A**	S650 9-115; oem_spec
Description	SCP Plus front for 31 in W x 11.5 in D box, 18X, box height 53.5 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF3153F orderable?*		

EDH-GEA-00935 — ACF3157S — GE — trim — STATUS UNKNOWN

Spectra SCP Plus surface front ACF3157S (31 in box, 21X)

OEM part number	ACF3157S	**A**	S650 9-115; oem_spec
Description	SCP Plus front for 31 in W x 11.5 in D box, 21X, box height 57.625 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF3157F orderable?*		

EDH-GEA-00936 — ACF3161S — GE — trim — STATUS UNKNOWN

Spectra SCP Plus surface front ACF3161S (31 in box, 24X)

OEM part number	ACF3161S	**A**	S650 9-115; oem_spec
Description	SCP Plus front for 31 in W x 11.5 in D box, 24X, box height 61.75 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF3161F orderable?*		

EDH-GEA-00937	ACF3165S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF3165S (31 in box, 27X)

OEM part number	ACF3165S	A	S650 9-115; oem_spec
Description	SCP Plus front for 31 in W x 11.5 in D box, 27X, box height 65.875 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF3165F orderable?*		

EDH-GEA-00938	ACF3170S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF3170S (31 in box, 30X)

OEM part number	ACF3170S	A	S650 9-115; oem_spec
Description	SCP Plus front for 31 in W x 11.5 in D box, 30X, box height 70 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF3170F orderable?*		

EDH-GEA-00939	ACF3174S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF3174S (31 in box, 33X)

OEM part number	ACF3174S	A	S650 9-115; oem_spec
Description	SCP Plus front for 31 in W x 11.5 in D box, 33X, box height 74.125 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF3174F orderable?*		

EDH-GEA-00940	ACF3178S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF3178S (31 in box, 36X)

OEM part number	ACF3178S	A	S650 9-115; oem_spec
Description	SCP Plus front for 31 in W x 11.5 in D box, 36X, box height 78.25 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF3178F orderable?*		

EDH-GEA-00941	ACF3182S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF3182S (31 in box, 39X)

OEM part number	ACF3182S	A	S650 9-115; oem_spec
Description	SCP Plus front for 31 in W x 11.5 in D box, 39X, box height 82.275 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF3182F orderable?*		

EDH-GEA-00942	ACF3186S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF3186S (31 in box, 42X)

OEM part number	ACF3186S	**A**	S650 9-115; oem_spec
Description	SCP Plus front for 31 in W x 11.5 in D box, 42X, box height 86.5 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF3186F orderable?*		

EDH-GEA-00943	ACF4049S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF4049S (40 in box, 15X)

OEM part number	ACF4049S	**A**	S650 9-115; oem_spec
Description	SCP Plus front for 40 in W x 11.5 in D box, 15X, box height 49.375 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF4049F orderable?*		

EDH-GEA-00944	ACF4053S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF4053S (40 in box, 18X)

OEM part number	ACF4053S	**A**	S650 9-115; oem_spec
Description	SCP Plus front for 40 in W x 11.5 in D box, 18X, box height 53.5 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF4053F orderable?*		

EDH-GEA-00945	ACF4057S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF4057S (40 in box, 21X)

OEM part number	ACF4057S	**A**	S650 9-115; oem_spec
Description	SCP Plus front for 40 in W x 11.5 in D box, 21X, box height 57.625 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF4057F orderable?*		

EDH-GEA-00946	ACF4061S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF4061S (40 in box, 24X)

OEM part number	ACF4061S	**A**	S650 9-115; oem_spec
Description	SCP Plus front for 40 in W x 11.5 in D box, 24X, box height 61.75 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF4061F orderable?*		

EDH-GEA-00947	ACF4065S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF4065S (40 in box, 27X)

OEM part number	ACF4065S	A	S650 9-115; oem_spec
Description	SCP Plus front for 40 in W x 11.5 in D box, 27X, box height 65.875 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF4065F orderable?*		

EDH-GEA-00948	ACF4070S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF4070S (40 in box, 30X)

OEM part number	ACF4070S	A	S650 9-115; oem_spec
Description	SCP Plus front for 40 in W x 11.5 in D box, 30X, box height 70 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF4070F orderable?*		

EDH-GEA-00949	ACF4074S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF4074S (40 in box, 33X)

OEM part number	ACF4074S	A	S650 9-115; oem_spec
Description	SCP Plus front for 40 in W x 11.5 in D box, 33X, box height 74.125 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF4074F orderable?*		

EDH-GEA-00950	ACF4078S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF4078S (40 in box, 36X)

OEM part number	ACF4078S	A	S650 9-115; oem_spec
Description	SCP Plus front for 40 in W x 11.5 in D box, 36X, box height 78.25 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF4078F orderable?*		

EDH-GEA-00951	ACF4082S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF4082S (40 in box, 39X)

OEM part number	ACF4082S	A	S650 9-115; oem_spec
Description	SCP Plus front for 40 in W x 11.5 in D box, 39X, box height 82.275 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF4082F orderable?*		

EDH-GEA-00952	ACF4086S	GE	trim	STATUS UNKNOWN

Spectra SCP Plus surface front ACF4086S (40 in box, 42X)

OEM part number	ACF4086S	A	S650 9-115; oem_spec
Description	SCP Plus front for 40 in W x 11.5 in D box, 42X, box height 86.5 in; S = surface front (1/4 in larger than box); flush fronts (F) are 2 in larger than box	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	door/lock details, Finish / plating, Material		
Open question	*Only S (surface) numbers printed; is an F (flush) variant e.g. ACF4086F orderable?*		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00913	**ACB311149**	Spectra SCP Plus replacement box ACB311149 (31 in W x 11.5 in D, 15X)	—	unknown
EDH-GEA-00914	**ACB311153**	Spectra SCP Plus replacement box ACB311153 (31 in W x 11.5 in D, 18X)	—	unknown
EDH-GEA-00915	**ACB311157**	Spectra SCP Plus replacement box ACB311157 (31 in W x 11.5 in D, 21X)	—	unknown
EDH-GEA-00916	**ACB311161**	Spectra SCP Plus replacement box ACB311161 (31 in W x 11.5 in D, 24X)	—	unknown
EDH-GEA-00917	**ACB311165**	Spectra SCP Plus replacement box ACB311165 (31 in W x 11.5 in D, 27X)	—	unknown
EDH-GEA-00918	**ACB311170**	Spectra SCP Plus replacement box ACB311170 (31 in W x 11.5 in D, 30X)	—	unknown
EDH-GEA-00919	**ACB311174**	Spectra SCP Plus replacement box ACB311174 (31 in W x 11.5 in D, 33X)	—	unknown
EDH-GEA-00920	**ACB311178**	Spectra SCP Plus replacement box ACB311178 (31 in W x 11.5 in D, 36X)	—	unknown
EDH-GEA-00921	**ACB311182**	Spectra SCP Plus replacement box ACB311182 (31 in W x 11.5 in D, 39X)	—	unknown
EDH-GEA-00922	**ACB311186**	Spectra SCP Plus replacement box ACB311186 (31 in W x 11.5 in D, 42X)	—	unknown
EDH-GEA-00923	**ACB401149**	Spectra SCP Plus replacement box ACB401149 (40 in W x 11.5 in D, 15X)	—	unknown
EDH-GEA-00924	**ACB401153**	Spectra SCP Plus replacement box ACB401153 (40 in W x 11.5 in D, 18X)	—	unknown
EDH-GEA-00925	**ACB401157**	Spectra SCP Plus replacement box ACB401157 (40 in W x 11.5 in D, 21X)	—	unknown
EDH-GEA-00926	**ACB401161**	Spectra SCP Plus replacement box ACB401161 (40 in W x 11.5 in D, 24X)	—	unknown
EDH-GEA-00927	**ACB401165**	Spectra SCP Plus replacement box ACB401165 (40 in W x 11.5 in D, 27X)	—	unknown
EDH-GEA-00928	**ACB401170**	Spectra SCP Plus replacement box ACB401170 (40 in W x 11.5 in D, 30X)	—	unknown
EDH-GEA-00929	**ACB401174**	Spectra SCP Plus replacement box ACB401174 (40 in W x 11.5 in D, 33X)	—	unknown
EDH-GEA-00930	**ACB401178**	Spectra SCP Plus replacement box ACB401178 (40 in W x 11.5 in D, 36X)	—	unknown
EDH-GEA-00931	**ACB401182**	Spectra SCP Plus replacement box ACB401182 (40 in W x 11.5 in D, 39X)	—	unknown
EDH-GEA-00932	**ACB401186**	Spectra SCP Plus replacement box ACB401186 (40 in W x 11.5 in D, 42X)	—	unknown

EDH-GEA-00913	ACB311149	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB311149 (31 in W x 11.5 in D, 15X)

OEM part number	ACB311149	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 31 in W x 11.5 in D x 49.375 in H (add 1/4 in for outside); interior 15X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00914	ACB311153	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB311153 (31 in W x 11.5 in D, 18X)

OEM part number	ACB311153	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 31 in W x 11.5 in D x 53.5 in H (add 1/4 in for outside); interior 18X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00915	ACB311157	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB311157 (31 in W x 11.5 in D, 21X)

OEM part number	ACB311157	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 31 in W x 11.5 in D x 57.625 in H (add 1/4 in for outside); interior 21X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00916	ACB311161	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB311161 (31 in W x 11.5 in D, 24X)

OEM part number	ACB311161	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 31 in W x 11.5 in D x 61.75 in H (add 1/4 in for outside); interior 24X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00917	ACB311165	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB311165 (31 in W x 11.5 in D, 27X)

OEM part number	ACB311165	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 31 in W x 11.5 in D x 65.875 in H (add 1/4 in for outside); interior 27X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00918	ACB311170	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB311170 (31 in W x 11.5 in D, 30X)

OEM part number	ACB311170	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 31 in W x 11.5 in D x 70 in H (add 1/4 in for outside); interior 30X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00919	ACB311174	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB311174 (31 in W x 11.5 in D, 33X)

OEM part number	ACB311174	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 31 in W x 11.5 in D x 74.125 in H (add 1/4 in for outside); interior 33X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00920	ACB311178	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB311178 (31 in W x 11.5 in D, 36X)

OEM part number	ACB311178	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 31 in W x 11.5 in D x 78.25 in H (add 1/4 in for outside); interior 36X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00921	ACB311182	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB311182 (31 in W x 11.5 in D, 39X)

OEM part number	ACB311182	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 31 in W x 11.5 in D x 82.275 in H (add 1/4 in for outside); interior 39X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00922	ACB311186	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB311186 (31 in W x 11.5 in D, 42X)

OEM part number	ACB311186	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 31 in W x 11.5 in D x 86.5 in H (add 1/4 in for outside); interior 42X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00923	ACB401149	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB401149 (40 in W x 11.5 in D, 15X)

OEM part number	ACB401149	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 40 in W x 11.5 in D x 49.375 in H (add 1/4 in for outside); interior 15X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00924	ACB401153	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB401153 (40 in W x 11.5 in D, 18X)

OEM part number	ACB401153	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 40 in W x 11.5 in D x 53.5 in H (add 1/4 in for outside); interior 18X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00925	ACB401157	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB401157 (40 in W x 11.5 in D, 21X)

OEM part number	ACB401157	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 40 in W x 11.5 in D x 57.625 in H (add 1/4 in for outside); interior 21X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00926	ACB401161	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB401161 (40 in W x 11.5 in D, 24X)

OEM part number	ACB401161	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 40 in W x 11.5 in D x 61.75 in H (add 1/4 in for outside); interior 24X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00927	ACB401165	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB401165 (40 in W x 11.5 in D, 27X)

OEM part number	ACB401165	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 40 in W x 11.5 in D x 65.875 in H (add 1/4 in for outside); interior 27X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00928	ACB401170	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB401170 (40 in W x 11.5 in D, 30X)

OEM part number	ACB401170	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 40 in W x 11.5 in D x 70 in H (add 1/4 in for outside); interior 30X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00929	ACB401174	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB401174 (40 in W x 11.5 in D, 33X)

OEM part number	ACB401174	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 40 in W x 11.5 in D x 74.125 in H (add 1/4 in for outside); interior 33X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00930	ACB401178	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB401178 (40 in W x 11.5 in D, 36X)

OEM part number	ACB401178	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 40 in W x 11.5 in D x 78.25 in H (add 1/4 in for outside); interior 36X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00931	ACB401182	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB401182 (40 in W x 11.5 in D, 39X)

OEM part number	ACB401182	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 40 in W x 11.5 in D x 82.275 in H (add 1/4 in for outside); interior 39X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

EDH-GEA-00932	ACB401186	GE	box/enclosure	STATUS UNKNOWN

Spectra SCP Plus replacement box ACB401186 (40 in W x 11.5 in D, 42X)

OEM part number	ACB401186	A	S650 9-115; oem_spec
Description	SCP Plus replacement box, furnished with no knockouts	A	same as above
Dimensions	Inside 40 in W x 11.5 in D x 86.5 in H (add 1/4 in for outside); interior 42X	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Finish / plating, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00904	**ACSHKSG**	Spectra SCP Plus hardware to mount one breaker ACSHKSG (SGD, single mounted)	SGD, SGH, SGL, SGP A	unknown
EDH-GEA-00906	**ACSHKSK**	Spectra SCP Plus hardware to mount one breaker ACSHKSK (SKH, single mounted)	SKH, SKL A	unknown
EDH-GEA-00908	**ACSHKTB4**	Spectra SCP Plus hardware to mount one breaker ACSHKTB4 (TB4, single mounted)	TB4 A	unknown
EDH-GEA-00888	**ACTHKEB1P**	Spectra SCP Plus hardware to mount one breaker ACTHKEB1P (TEB, dual mounted)	TEB, TED, THED (1-pole) A	unknown
EDH-GEA-00890	**ACTHKEB2P**	Spectra SCP Plus hardware to mount one breaker ACTHKEB2P (TEB, dual mounted)	TEB, TED, THED (2-pole) A	unknown
EDH-GEA-00892	**ACTHKEB3P**	Spectra SCP Plus hardware to mount one breaker ACTHKEB3P (TEB, dual mounted)	TEB, TED, THED (3-pole) A	unknown
EDH-GEA-00900	**ACTHKJD**	Spectra SCP Plus hardware to mount one breaker ACTHKJD (TJD, dual mounted)	TJD, TJJ, TJK A	unknown
EDH-GEA-00896	**ACTHKQD2P**	Spectra SCP Plus hardware to mount one breaker ACTHKQD2P (TQD, dual mounted)	TQD, THQD (2-pole) A	unknown
EDH-GEA-00898	**ACTHKQD3P**	Spectra SCP Plus hardware to mount one breaker ACTHKQD3P (TQD, dual mounted)	TQD, THQD (3-pole) A	unknown
EDH-GEA-00886	**ACTHKSE**	Spectra SCP Plus hardware to mount one breaker ACTHKSE (SHE (SEH), dual mounted)	SHE (SEH), SEL, SED, SEP A	unknown
EDH-GEA-00894	**ACTHKSF**	Spectra SCP Plus hardware to mount one breaker ACTHKSF (TFK, dual mounted)	TFK, SFH, SFL, SFP A	unknown
EDH-GEA-00902	**ACTHKSG**	Spectra SCP Plus hardware to mount one breaker ACTHKSG (SGD, dual mounted)	SGD, SGH, SGL, SGP A	unknown

EDH-GEA-00904	ACSHKSG	GE	hardware-kit	STATUS UNKNOWN

Spectra SCP Plus hardware to mount one breaker ACSHKSG (SGD, single mounted)

OEM part number	ACSHKSG	A	S650 9-115; oem_spec
Description	Mounting hardware to mount one breaker, SCP Plus panelboard, single mounted, SGD, SGH, SGL, SGP, max 400, 800 A	A	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	A	same as above
Current rating	400, 800 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00906	ACSHKSK	GE	hardware-kit	STATUS UNKNOWN

Spectra SCP Plus hardware to mount one breaker ACSHKSK (SKH, single mounted)

OEM part number	ACSHKSK	A	S650 9-115; oem_spec
Description	Mounting hardware to mount one breaker, SCP Plus panelboard, single mounted, SKH, SKL, max 800, 1200 A	A	same as above
Breaker compatibility	SKH, SKL	A	same as above
Current rating	800, 1200 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00908	ACSHKTB4	GE	hardware-kit	STATUS UNKNOWN

Spectra SCP Plus hardware to mount one breaker ACSHKTB4 (TB4, single mounted)

OEM part number	ACSHKTB4	A	S650 9-115; oem_spec
Description	Mounting hardware to mount one breaker, SCP Plus panelboard, single mounted, TB4, max 400 A	A	same as above
Breaker compatibility	TB4	A	same as above
Current rating	400 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00888	ACTHKEB1P	GE	hardware-kit	STATUS UNKNOWN

Spectra SCP Plus hardware to mount one breaker ACTHKEB1P (TEB, dual mounted)

OEM part number	ACTHKEB1P	A	S650 9-115; oem_spec
Description	Mounting hardware to mount one breaker, SCP Plus panelboard, dual mounted, TEB, TED, THED, max 150 A, 1-pole	A	same as above
Breaker compatibility	TEB, TED, THED (1-pole)	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00890	ACTHKEB2P	GE	hardware-kit	STATUS UNKNOWN

Spectra SCP Plus hardware to mount one breaker ACTHKEB2P (TEB, dual mounted)

OEM part number	ACTHKEB2P	A	S650 9-115; oem_spec
Description	Mounting hardware to mount one breaker, SCP Plus panelboard, dual mounted, TEB, TED, THED, max 150 A, 2-pole	A	same as above
Breaker compatibility	TEB, TED, THED (2-pole)	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00892	ACTHKEB3P	GE	hardware-kit	STATUS UNKNOWN

Spectra SCP Plus hardware to mount one breaker ACTHKEB3P (TEB, dual mounted)

OEM part number	ACTHKEB3P	A	S650 9-115; oem_spec
Description	Mounting hardware to mount one breaker, SCP Plus panelboard, dual mounted, TEB, TED, THED, max 150 A, 3-pole	A	same as above
Breaker compatibility	TEB, TED, THED (3-pole)	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00900	ACTHKJD	GE	hardware-kit	STATUS UNKNOWN

Spectra SCP Plus hardware to mount one breaker ACTHKJD (TJD, dual mounted)

OEM part number	ACTHKJD	A	S650 9-115; oem_spec
Description	Mounting hardware to mount one breaker, SCP Plus panelboard, dual mounted, TJD, TJJ, TJK, max 400 A	A	same as above
Breaker compatibility	TJD, TJJ, TJK	A	same as above
Current rating	400 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00896	ACTHKQD2P	GE	hardware-kit	STATUS UNKNOWN

Spectra SCP Plus hardware to mount one breaker ACTHKQD2P (TQD, dual mounted)

OEM part number	ACTHKQD2P	A	S650 9-115; oem_spec
Description	Mounting hardware to mount one breaker, SCP Plus panelboard, dual mounted, TQD, THQD, max 225 A, 2-pole	A	same as above
Breaker compatibility	TQD, THQD (2-pole)	A	same as above
Current rating	225 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00898	ACTHKQD3P	GE	hardware-kit	STATUS UNKNOWN

Spectra SCP Plus hardware to mount one breaker ACTHKQD3P (TQD, dual mounted)

OEM part number	ACTHKQD3P	A	S650 9-115; oem_spec
Description	Mounting hardware to mount one breaker, SCP Plus panelboard, dual mounted, TQD, THQD, max 225 A, 3-pole	A	same as above
Breaker compatibility	TQD, THQD (3-pole)	A	same as above
Current rating	225 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00886	ACTHKSE	GE	hardware-kit	STATUS UNKNOWN

Spectra SCP Plus hardware to mount one breaker ACTHKSE (SHE (SEH), dual mounted)

OEM part number	ACTHKSE	A	S650 9-115; oem_spec
Description	Mounting hardware to mount one breaker, SCP Plus panelboard, dual mounted, SHE (SEH), SEL, SED, SEP, max 150 A	A	same as above
Breaker compatibility	SHE (SEH), SEL, SED, SEP	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00894	ACTHKSF	GE	hardware-kit	STATUS UNKNOWN

Spectra SCP Plus hardware to mount one breaker ACTHKSF (TFK, dual mounted)

OEM part number	ACTHKSF	A	S650 9-115; oem_spec
Description	Mounting hardware to mount one breaker, SCP Plus panelboard, dual mounted, TFK, SFH, SFL, SFP, max 250 A	A	same as above
Breaker compatibility	TFK, SFH, SFL, SFP	A	same as above
Current rating	250 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TFJ / TFK / THFK / TFL, Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00902	ACTHKSG	GE	hardware-kit	STATUS UNKNOWN

Spectra SCP Plus hardware to mount one breaker ACTHKSG (SGD, dual mounted)

OEM part number	ACTHKSG	A	S650 9-115; oem_spec
Description	Mounting hardware to mount one breaker, SCP Plus panelboard, dual mounted, SGD, SGH, SGL, SGP, max 400, 600 A	A	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	A	same as above
Current rating	400, 600 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Kit contents, Material		

5.11 SPECTRA-PP — Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)

FAM-GEA-004 · panelboard · aka APN, APNB, Spectra, Spectra Bolt-On (SBO), Spectra Plug-In, Spectra Series, SpectraRMS · markings: ABB, GE, GE Industrial Solutions, General Electric

GE's power distribution panelboard. Two interior styles: APN plug-in (breakers bolt to AMC circuit breaker mounting modules that latch onto the interior rail and clip onto the bus; ADS fusible switch modules) and APNB bolt-on (breakers bolt to copper straps AMCB kits fastened with carriage bolts/antiturn clips to the vertical bus). Vertical space measured in X units (1X = 1-3/8 in). Box widths 27/31/36/40/44 in, APB boxes and APF fronts, AML main-lug modules, ANK/ANKN neutral kits, AEG ground kits. NOTE on 'APN': in GE nomenclature APN is the Spectra plug-in interior type code (APNB = bolt-on), while APN48/APN84/APN126 (A-Series) and APN49/APN99 (Spectra) are permanent circuit-number tab kits; no 'A-Series power panel' code APN was found.

Attribute	Value	Cl.	Sources
Status	ABB guide: "Please note that Spectra, TED, FE, and FG breakers are obsolete"; Spectra bolt-on additions are served by Tmax XT retrofit kits (SRFB...)	A	S427 guide pp.27-32; oem_spec
	Listed as current in 2014 BuyLog; a 2021/2022 ABB BuyLog TOC reportedly labels Spectra bolt-on mounting hardware 'obsoleted' (Obsolescence wording seen only in a search-engine summary of the blocked ABB BuyLog.)	C	S143, S161 inference
Successor	ReliaGear neXT power panelboards (ABB) - inferred from ABB BuyLog placing 'Retrofit kit for Spectra panelboards' alongside ReliaGear neXT	D	S161, S158 inference
Voltage rating	600 Vac / 250 Vdc max	A	S143 p.11-24; oem_spec
Main ampacity	Main bus 250-1200 A Cu or Al; mains up to 1200 A lugs, breaker (SF/SG/SK/FG) or fusible switch	A	same as above
Branch breakers accepted	Double-branch SE, SF, SG, FG, FB, TEY, TEB, TQD (and THQB); center-mounted SK; plug-in version also ADS fusible switches 30-1200 A	A	same as above
X unit	1X = 1 3/8 in vertical panel space	A	S143 p.11-40 note; oem_spec
Box widths	27, 31, 36, 40, 44 in	A	S143 p.11-34, 11-35; oem_spec
Apn meaning	APN = Panelboard Interior Type (plug-in); APNB = Panelboard Interior Type bolt-on; structure APN<X-height><amps>U[B4]	A	S143 p.11-37; oem_spec
Plug in vs bolt on	Main lug kits bolt directly to interior bus bars (either APN Plug-In Style or APNB Bolt-On Style)	A	S143 p.11-28; oem_spec
OEM instruction document	GEH5589 R07: APN/APNB interiors mount on four 3/8 in interior mounting studs on the APB enclosure back wall, secured with wing nuts and washers; line end of interior toward LINE end of box; deadfront ends fastened to mounting posts with 1/4-20 hex-head screws 50-60 in-lb (27-44 in wide panels use 1/4-turn fasteners between end fillers and side plates)	A	S410 pp.1-2; oem_spec
Reference dimension	Bolt-on (APNB) straps and AMB lug kits mount on the side of the interior where the distance from the nearest vertical bus face to the inner face of the bus-support rail is 2.75 in; 1X = 1.38 in (1-3/8 in) vertical space	A	S397, S418 DEH047 p.1; DEH070 p.1; oem_spec

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Record Plus FC (FCS/FCV/FCN/FCH/FCL), Record Plus FG (FGV/FGN/FGH/FGL/FGP), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, TFJ / TFK / THFK / TFL, THQB / THHQB / TXQB, TJD / TJJ / TJK / THJK, TKM / THKM, TQD / THQD

Key documents: S143 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S154 DEH065 R02 Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD); S155 GEH5674 R03 Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM); S156 DEH40392 R01 Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL; S157 DEH212 R02 Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S; S158 1SXU900191B0201 ReliaGear neXT Power Panelboards (brochure); S161 BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (o; S397 DEH047 R02 Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits, Catalog Numbers AMCB6EB, ; S410 GEH5589 R07 Spectra Series Power Panelboards - Type APN and APNB Panelboard Interiors into Type APB Pa; S418 DEH070 R02 Spectra Series Power Panelboards - Type AMB Main Lug Kit; S427 ABB Quick Selector Guide - Small Projects (distributor edition, Viking Electric) - incl. T

Also fits this family (entry printed elsewhere): TQDPLD1

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00530	**AMB2120CA**	Spectra main lug kit AMB2120CA	—	unknown
EDH-GEA-00538	**AMB2120DCA**	Spectra main lug kit AMB2120DCA	—	unknown
EDH-GEA-00518	**AMB2120DMA**	Spectra main lug kit AMB2120DMA	—	unknown
EDH-GEA-00516	**AMB2120DMC**	Spectra main lug kit AMB2120DMC	—	unknown
EDH-GEA-00522	**AMB2120DN**	Spectra main lug kit AMB2120DN	—	unknown
EDH-GEA-00513	**AMB2120MA**	Spectra main lug kit AMB2120MA	—	unknown
EDH-GEA-00520	**AMB2120N**	Spectra main lug kit AMB2120N	—	unknown
EDH-GEA-00524	**AMB2250CA**	Spectra main lug kit AMB2250CA	—	unknown
EDH-GEA-00532	**AMB2250DCA**	Spectra main lug kit AMB2250DCA	—	unknown
EDH-GEA-00526	**AMB2600CA**	Spectra main lug kit AMB2600CA	—	unknown
EDH-GEA-00534	**AMB2600DCA**	Spectra main lug kit AMB2600DCA	—	unknown
EDH-GEA-00509	**AMB2600MA**	Spectra main lug kit AMB2600MA	—	unknown
EDH-GEA-00511	**AMB2600MC**	Spectra main lug kit AMB2600MC	—	unknown
EDH-GEA-00528	**AMB2800CA**	Spectra main lug kit AMB2800CA	—	unknown
EDH-GEA-00536	**AMB2800DCA**	Spectra main lug kit AMB2800DCA	—	unknown
EDH-GEA-00531	**AMB3120CA**	Spectra main lug kit AMB3120CA	—	unknown
EDH-GEA-00539	**AMB3120DCA**	Spectra main lug kit AMB3120DCA	—	unknown
EDH-GEA-00519	**AMB3120DMA**	Spectra main lug kit AMB3120DMA	—	unknown
EDH-GEA-00517	**AMB3120DMC**	Spectra main lug kit AMB3120DMC	—	unknown
EDH-GEA-00523	**AMB3120DN**	Spectra main lug kit AMB3120DN	—	unknown
EDH-GEA-00514	**AMB3120MA**	Spectra main lug kit AMB3120MA	—	unknown
EDH-GEA-00515	**AMB3120MC**	Spectra main lug kit AMB3120MC	—	unknown
EDH-GEA-00521	**AMB3120N**	Spectra main lug kit AMB3120N	—	unknown
EDH-GEA-00525	**AMB3250CA**	Spectra main lug kit AMB3250CA	—	unknown
EDH-GEA-00533	**AMB3250DCA**	Spectra main lug kit AMB3250DCA	—	unknown
EDH-GEA-00527	**AMB3600CA**	Spectra main lug kit AMB3600CA	—	unknown
EDH-GEA-00535	**AMB3600DCA**	Spectra main lug kit AMB3600DCA	—	unknown
EDH-GEA-00510	**AMB3600MA**	Spectra main lug kit AMB3600MA	—	unknown
EDH-GEA-00512	**AMB3600MC**	Spectra main lug kit AMB3600MC	—	unknown
EDH-GEA-00529	**AMB3800CA**	Spectra main lug kit AMB3800CA	—	unknown
EDH-GEA-00537	**AMB3800DCA**	Spectra main lug kit AMB3800DCA	—	unknown
EDH-GEA-00231	**AML3120CFP**	Spectra main lug module AML3120CFP (1200 A compression)	—	unknown
EDH-GEA-00226	**AML3120FP**	Spectra main lug module AML3120FP (1200 A mechanical)	—	unknown
EDH-GEA-00227	**AML3250CFP**	Spectra main lug module AML3250CFP (250 A compression)	—	unknown
EDH-GEA-00220	**AML3250FP**	Spectra main lug module AML3250FP (250 A mechanical)	—	unknown
EDH-GEA-00219	**AML3250SFP**	Spectra main lug module AML3250SFP (250 A mechanical)	—	unknown
EDH-GEA-00228	**AML3400CFP**	Spectra main lug module AML3400CFP (400 A compression)	—	unknown
EDH-GEA-00222	**AML3400FP**	Spectra main lug module AML3400FP (400 A mechanical)	—	unknown
EDH-GEA-00221	**AML3400SFP**	Spectra main lug module AML3400SFP (400 A mechanical)	—	unknown
EDH-GEA-00229	**AML3600CFP**	Spectra main lug module AML3600CFP (600 A compression)	—	unknown
EDH-GEA-00224	**AML3600FP**	Spectra main lug module AML3600FP (600 A mechanical)	—	unknown
EDH-GEA-00223	**AML3600SFP**	Spectra main lug module AML3600SFP (600 A mechanical)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00230	**AML3800CFP**	Spectra main lug module AML3800CFP (800 A compression)	—	unknown
EDH-GEA-00225	**AML3800FP**	Spectra main lug module AML3800FP (800 A mechanical)	—	unknown

EDH-GEA-00530 AMB2120CA — GE / ABB lineage — main-lug-kit — STATUS UNKNOWN

Spectra main lug kit AMB2120CA

OEM part number	AMB2120CA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2120CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	2	B	S419 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00538 AMB2120DCA — GE / ABB lineage — main-lug-kit — STATUS UNKNOWN

Spectra main lug kit AMB2120DCA

OEM part number	AMB2120DCA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2120DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	2	B	S419 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00518	AMB2120DMA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2120DMA

OEM part number	AMB2120DMA	A	S418 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB2120DMAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 2-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S418 DEH070 pp.1-2; oem_spec
Poles	2	B	S418 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S418 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S418 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S418 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S418 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00516	AMB2120DMC	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2120DMC

OEM part number	AMB2120DMC	A	S418 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB2120DMCF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 2-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S418 DEH070 pp.1-2; oem_spec
Poles	2	B	S418 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S418 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S418 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S418 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S418 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00522	AMB2120DN	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2120DN

OEM part number	AMB2120DN	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2120DNF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	2	B	S419 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00513	AMB2120MA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2120MA

OEM part number	AMB2120MA	A	S418 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB2120MAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 2-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S418 DEH070 pp.1-2; oem_spec
Poles	2	B	S418 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S418 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S418 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S418 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S418 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00520	AMB2120N	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2120N

OEM part number	AMB2120N	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2120NF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	2	B	S419 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00524	AMB2250CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2250CA

OEM part number	AMB2250CA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2250CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 250 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	2	B	S419 DEH071 p.1; inference
Current rating	250 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00532	AMB2250DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2250DCA

OEM part number	AMB2250DCA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2250DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 250 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	2	B	S419 DEH071 p.1; inference
Current rating	250 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00526	AMB2600CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2600CA

OEM part number	AMB2600CA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2600CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 600 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	2	B	S419 DEH071 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00534	AMB2600DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2600DCA

OEM part number	AMB2600DCA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2600DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 600 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	2	B	S419 DEH071 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00509	AMB2600MA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2600MA

OEM part number	AMB2600MA	A	S418 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB2600MAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 2-pole, 600 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S418 DEH070 pp.1-2; oem_spec
Poles	2	B	S418 DEH070 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S418 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S418 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S418 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00511	AMB2600MC	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2600MC

OEM part number	AMB2600MC	A	S418 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB2600MCF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 2-pole, 600 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S418 DEH070 pp.1-2; oem_spec
Poles	2	B	S418 DEH070 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S418 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S418 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S418 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00528	AMB2800CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2800CA

OEM part number	AMB2800CA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2800CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 800 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	2	B	S419 DEH071 p.1; inference
Current rating	800 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00536	AMB2800DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2800DCA

OEM part number	AMB2800DCA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2800DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 800 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	2	B	S419 DEH071 p.1; inference
Current rating	800 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00531	AMB3120CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120CA

OEM part number	AMB3120CA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3120CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	3	B	S419 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00539	AMB3120DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120DCA

OEM part number	AMB3120DCA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3120DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	3	B	S419 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00519	AMB3120DMA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120DMA

OEM part number	AMB3120DMA	A	S418 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB3120DMAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 3-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S418 DEH070 pp.1-2; oem_spec
Poles	3	B	S418 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S418 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S418 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S418 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S418 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00517	AMB3120DMC	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120DMC

OEM part number	AMB3120DMC	A	S418 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB3120DMCF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 3-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S418 DEH070 pp.1-2; oem_spec
Poles	3	B	S418 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S418 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S418 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S418 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S418 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00523	AMB3120DN	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120DN

OEM part number	AMB3120DN	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3120DNF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	3	B	S419 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00514	AMB3120MA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120MA

OEM part number	AMB3120MA	A	S418 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB3120MAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 3-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S418 DEH070 pp.1-2; oem_spec
Poles	3	B	S418 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S418 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S418 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S418 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S418 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00515	AMB3120MC	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120MC

OEM part number	AMB3120MC	A	S418 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB3120MCF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 3-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S418 DEH070 pp.1-2; oem_spec
Poles	3	B	S418 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S418 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S418 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S418 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S418 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00521	AMB3120N	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120N

OEM part number	AMB3120N	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3120NF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	3	B	S419 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00525	AMB3250CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3250CA

OEM part number	AMB3250CA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3250CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 250 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	3	B	S419 DEH071 p.1; inference
Current rating	250 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00533	AMB3250DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3250DCA

OEM part number	AMB3250DCA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3250DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 250 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	3	B	S419 DEH071 p.1; inference
Current rating	250 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00527	AMB3600CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3600CA

OEM part number	AMB3600CA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3600CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 600 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	3	B	S419 DEH071 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00535	AMB3600DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3600DCA

OEM part number	AMB3600DCA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3600DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 600 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	3	B	S419 DEH071 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00510	AMB3600MA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3600MA

OEM part number	AMB3600MA	A	S418 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB3600MAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 3-pole, 600 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S418 DEH070 pp.1-2; oem_spec
Poles	3	B	S418 DEH070 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S418 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S418 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S418 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00512	AMB3600MC	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3600MC

OEM part number	AMB3600MC	A	S418 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB3600MCF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 3-pole, 600 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S418 DEH070 pp.1-2; oem_spec
Poles	3	B	S418 DEH070 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S418 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S418 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S418 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00529	AMB3800CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3800CA

OEM part number	AMB3800CA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3800CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 800 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	3	B	S419 DEH071 p.1; inference
Current rating	800 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00537	AMB3800DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3800DCA

OEM part number	AMB3800DCA	A	S419 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3800DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 800 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S419 DEH071 pp.1-2; oem_spec
Poles	3	B	S419 DEH071 p.1; inference
Current rating	800 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S419 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S419 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S419 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00540)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00231	AML3120CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3120CFP (1200 A compression)

OEM part number	AML3120CFP	A	S143 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 1200 A, Compression lugs, 4 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	1200 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00226	AML3120FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3120FP (1200 A mechanical)

OEM part number	AML3120FP	A	S143 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 1200 A, Mechanical lugs, 2 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	1200 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00227	AML3250CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250CFP (250 A compression)

OEM part number	AML3250CFP	**A**	S143 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 350kcmil, includes cover plate AFPML6X	**A**	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	same as above
Current rating	250 A	**A**	same as above
Dimensions	6X module height; box width 36 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00220	AML3250FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250FP (250 A mechanical)

OEM part number	AML3250FP	**A**	S143 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Mechanical lugs, 1 lug(s) per phase, 1 wire(s) per lug, #6-350kcmil, includes cover plate AFPML6X	**A**	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	same as above
Current rating	250 A	**A**	same as above
Dimensions	6X module height; box width 36 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00219	AML3250SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250SFP (250 A mechanical)

OEM part number	AML3250SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	**A**	S143, S650 p.11-45; oem_spec
Alternate / superseded numbers	AML3250SFP1 (as printed with footnote 1 fused ("4X modules cannot be converted to compression lug version"))	**A**	S650 alias; 9-112; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Mechanical lugs, 1 lug(s) per phase, 1 wire(s) per lug, #6-350kcmil, includes cover plate AFPML4X	**A**	S143 p.11-45; oem_spec
	4X main lug module with mechanical lugs, cover plate AFPML4X; 4X modules cannot be converted to compression lug version	**A**	S650 9-112; oem_spec
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	S143 p.11-45; oem_spec
Current rating	250 A	**A**	same as above
Dimensions	4X module height; box width 27, 36 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00228	AML3400CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400CFP (400 A compression)

OEM part number	AML3400CFP	**A**	S143 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6X	**A**	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	same as above
Current rating	400 A	**A**	same as above
Dimensions	6X module height; box width 36, 44 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00222	AML3400FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400FP (400 A mechanical)

OEM part number	AML3400FP	**A**	S143 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6X	**A**	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	same as above
Current rating	400 A	**A**	same as above
Dimensions	6X module height; box width 36, 44 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00221	AML3400SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400SFP (400 A mechanical)

OEM part number	AML3400SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	**A**	S143, S650 p.11-45; oem_spec
Alternate / superseded numbers	AML3400SFP1 (as printed with footnote 1 fused ("4X modules cannot be converted to compression lug version"))	**A**	S650 alias; 9-112; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML4X	**A**	S143 p.11-45; oem_spec
	4X main lug module with mechanical lugs, cover plate AFPML4X; 4X modules cannot be converted to compression lug version	**A**	S650 9-112; oem_spec
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	S143 p.11-45; oem_spec
Current rating	400 A	**A**	same as above
Dimensions	4X module height; box width 27, 36, 44 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00229	AML3600CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600CFP (600 A compression)

OEM part number	AML3600CFP	**A**	S143 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6X	**A**	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	same as above
Current rating	600 A	**A**	same as above
Dimensions	6X module height; box width 36, 44 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00224	AML3600FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600FP (600 A mechanical)

OEM part number	AML3600FP	**A**	S143 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6X	**A**	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	same as above
Current rating	600 A	**A**	same as above
Dimensions	6X module height; box width 36, 44 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00223	AML3600SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600SFP (600 A mechanical)

OEM part number	AML3600SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	**A**	S143, S650 p.11-45; oem_spec
Alternate / superseded numbers	AML3600SFP1 (as printed with footnote 1 fused ("4X modules cannot be converted to compression lug version"))	**A**	S650 alias; 9-112; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML4X	**A**	S143 p.11-45; oem_spec
	4X main lug module with mechanical lugs, cover plate AFPML4X; 4X modules cannot be converted to compression lug version	**A**	S650 9-112; oem_spec
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	S143 p.11-45; oem_spec
Current rating	600 A	**A**	same as above
Dimensions	4X module height; box width 27, 36, 44 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00230	AML3800CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3800CFP (800 A compression)

OEM part number	AML3800CFP	A	S143 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 800 A, Compression lugs, 4 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	800 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00225	AML3800FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3800FP (800 A mechanical)

OEM part number	AML3800FP	A	S143 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 800 A, Mechanical lugs, 2 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	800 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

Through Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00243	**AFL120**	Spectra feed-thru lug cover plate kit AFL120	—	unknown
EDH-GEA-00242	**AFL600**	Spectra feed-thru lug cover plate kit AFL600	—	unknown

EDH-GEA-00243	AFL120	GE	through-feed-lug-kit	STATUS UNKNOWN

Spectra feed-thru lug cover plate kit AFL120

OEM part number	AFL120	A	S143 p.11-46; oem_spec
Description	Feed thru lug cover plate kit: converts AML main lug module to feed-thru lug module; includes barrier and oversized cover plates (discard original cover plates)	A	same as above
Current rating	800/1200 A	A	same as above
Dimensions	12X; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5630 (Type AML Feed Thru Main Lug Kits)	A	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material, Status		

EDH-GEA-00242	AFL600	GE	through-feed-lug-kit	STATUS UNKNOWN

Spectra feed-thru lug cover plate kit AFL600

OEM part number	AFL600	A	S143 p.11-46; oem_spec
Description	Feed thru lug cover plate kit: converts AML main lug module to feed-thru lug module; includes barrier and oversized cover plates (discard original cover plates)	A	same as above
Current rating	250/400/600 A	A	same as above
Dimensions	9X; box width 27, 36, 44 in	A	same as above
OEM instruction document	GEH-5630 (Type AML Feed Thru Main Lug Kits)	A	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material, Status		

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00852	**AMK350**	Spectra mechanical lug kit AMK350 (#6-350 kcmil)	—	unknown
EDH-GEA-00853	**AMK500**	Spectra mechanical lug kit AMK500 (#2-500 kcmil)	—	unknown
EDH-GEA-00854	**AMK600**	Spectra mechanical lug kit AMK600 (#2-600 kcmil)	—	unknown
EDH-GEA-00855	**AMK750**	Spectra mechanical lug kit AMK750 (3/0-750 kcmil)	—	unknown
EDH-GEA-00856	**AMKP101**	Spectra compression (crimp) lug kit AMKP101 (1/0, 3-pack)	—	unknown
EDH-GEA-00858	**AMKP202**	Spectra compression (crimp) lug kit AMKP202 (2/0, 3-pack)	—	unknown
EDH-GEA-00857	**AMKP2101**	Spectra compression (crimp) lug kit AMKP2101 (1/0, 6-pack)	—	unknown
EDH-GEA-00859	**AMKP2202**	Spectra compression (crimp) lug kit AMKP2202 (2/0, 6-pack)	—	unknown
EDH-GEA-00865	**AMKP2250**	Spectra compression (crimp) lug kit AMKP2250 (250 kcmil, 6-pack)	—	unknown
EDH-GEA-00867	**AMKP2300**	Spectra compression (crimp) lug kit AMKP2300 (300 kcmil, 6-pack)	—	unknown
EDH-GEA-00861	**AMKP2303**	Spectra compression (crimp) lug kit AMKP2303 (3/0, 6-pack)	—	unknown
EDH-GEA-00869	**AMKP2350**	Spectra compression (crimp) lug kit AMKP2350 (350 kcmil, 6-pack)	—	unknown
EDH-GEA-00871	**AMKP2400**	Spectra compression (crimp) lug kit AMKP2400 (400 kcmil, 6-pack)	—	unknown
EDH-GEA-00863	**AMKP2404**	Spectra compression (crimp) lug kit AMKP2404 (4/0, 6-pack)	—	unknown
EDH-GEA-00864	**AMKP250**	Spectra compression (crimp) lug kit AMKP250 (250 kcmil, 3-pack)	—	unknown
EDH-GEA-00873	**AMKP2500**	Spectra compression (crimp) lug kit AMKP2500 (500 kcmil, 6-pack)	—	unknown
EDH-GEA-00875	**AMKP2600**	Spectra compression (crimp) lug kit AMKP2600 (600 kcmil, 6-pack)	—	unknown
EDH-GEA-00877	**AMKP2750**	Spectra compression (crimp) lug kit AMKP2750 (700/750 kcmil, 6-pack)	—	unknown
EDH-GEA-00866	**AMKP300**	Spectra compression (crimp) lug kit AMKP300 (300 kcmil, 3-pack)	—	unknown
EDH-GEA-00860	**AMKP303**	Spectra compression (crimp) lug kit AMKP303 (3/0, 3-pack)	—	unknown
EDH-GEA-00868	**AMKP350**	Spectra compression (crimp) lug kit AMKP350 (350 kcmil, 3-pack)	—	unknown
EDH-GEA-00870	**AMKP400**	Spectra compression (crimp) lug kit AMKP400 (400 kcmil, 3-pack)	—	unknown
EDH-GEA-00862	**AMKP404**	Spectra compression (crimp) lug kit AMKP404 (4/0, 3-pack)	—	unknown
EDH-GEA-00872	**AMKP500**	Spectra compression (crimp) lug kit AMKP500 (500 kcmil, 3-pack)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00874	**AMKP600**	Spectra compression (crimp) lug kit AMKP600 (600 kcmil, 3-pack)	—	unknown
EDH-GEA-00876	**AMKP750**	Spectra compression (crimp) lug kit AMKP750 (700/750 kcmil, 3-pack)	—	unknown
EDH-GEA-00878	**KLP101**	Spectra ADS switch load-side lug kit KLP101 (#8-1/0 Cu/Al)	—	unknown
EDH-GEA-00879	**KLP300**	Spectra ADS switch load-side lug kit KLP300 (#4-300 kcmil Cu/Al)	—	unknown
EDH-GEA-00880	**KLP500**	Spectra ADS switch load-side lug kit KLP500 (2/0-500 kcmil Cu/Al)	—	unknown
EDH-GEA-00881	**KLP600**	Spectra ADS switch load-side lug kit KLP600 (400-600 kcmil Cu/Al or 400-500 kcmil Cu)	—	unknown
EDH-GEA-00882	**KLP750**	Spectra ADS switch load-side lug kit KLP750 (500-750 kcmil Al or 750 kcmil Cu)	—	unknown

EDH-GEA-00852	**AMK350**	GE	lug-kit	STATUS UNKNOWN

Spectra mechanical lug kit AMK350 (#6-350 kcmil)

OEM part number	AMK350	**A**	S650 9-113; oem_spec
Description	Mechanical lug kit to convert AML main mechanical lug modules or ANK neutral modules to dual main lug version, or to replace standard lugs with oversized lugs; wire range #6-350 kcmil Cu/Al	**A**	same as above
Kit contents	3 lugs, 1 wire per lug	**A**	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug part number, Torque values		

EDH-GEA-00853	**AMK500**	GE	lug-kit	STATUS UNKNOWN

Spectra mechanical lug kit AMK500 (#2-500 kcmil)

OEM part number	AMK500	**A**	S650 9-113; oem_spec
Description	Mechanical lug kit to convert AML main mechanical lug modules or ANK neutral modules to dual main lug version, or to replace standard lugs with oversized lugs; wire range #2-500 kcmil Cu/Al	**A**	same as above
Kit contents	3 lugs, 2 wires per lug	**A**	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug part number, Torque values		

EDH-GEA-00854	**AMK600**	GE	lug-kit	STATUS UNKNOWN

Spectra mechanical lug kit AMK600 (#2-600 kcmil)

OEM part number	AMK600	**A**	S650 9-113; oem_spec
Description	Mechanical lug kit to convert AML main mechanical lug modules or ANK neutral modules to dual main lug version, or to replace standard lugs with oversized lugs; wire range #2-600 kcmil Cu/Al	**A**	same as above
Kit contents	3 lugs, 2 wires per lug	**A**	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug part number, Torque values		

EDH-GEA-00855	**AMK750**	GE	lug-kit	STATUS UNKNOWN

Spectra mechanical lug kit AMK750 (3/0-750 kcmil)

OEM part number	AMK750	**A**	S650 9-113; oem_spec
Description	Mechanical lug kit to convert AML main mechanical lug modules or ANK neutral modules to dual main lug version, or to replace standard lugs with oversized lugs; wire range 3/0-750 kcmil Cu/Al	**A**	same as above
Kit contents	3 lugs, 2 wires per lug	**A**	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug part number, Torque values		

EDH-GEA-00856	AMKP101	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP101 (1/0, 3-pack)

OEM part number	AMKP101	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 1/0; 3-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	3 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA52, Burndy 296, T&B 50	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00858	AMKP202	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP202 (2/0, 3-pack)

OEM part number	AMKP202	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 2/0; 3-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	3 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA52, Burndy 297, T&B 54H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00857	AMKP2101	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP2101 (1/0, 6-pack)

OEM part number	AMKP2101	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 1/0; 6-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	6 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA52, Burndy 296, T&B 50	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00859	AMKP2202	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP2202 (2/0, 6-pack)

OEM part number	AMKP2202	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 2/0; 6-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	6 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA52, Burndy 297, T&B 54H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00865	AMKP2250	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP2250 (250 kcmil, 6-pack)

OEM part number	AMKP2250	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 250 kcmil; 6-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	6 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA76, Burndy 324, T&B 71H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00867	AMKP2300	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP2300 (300 kcmil, 6-pack)

OEM part number	AMKP2300	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 300 kcmil; 6-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	6 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA87H / 15C87, Burndy 470, T&B 76	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00861	AMKP2303	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP2303 (3/0, 6-pack)

OEM part number	AMKP2303	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 3/0; 6-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	6 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA66, Burndy 467, T&B 60	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00869	AMKP2350	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP2350 (350 kcmil, 6-pack)

OEM part number	AMKP2350	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 350 kcmil; 6-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	6 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA96H / 15C96H, Burndy 299, T&B 87H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00871	AMKP2400	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP2400 (400 kcmil, 6-pack)

OEM part number	AMKP2400	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 400 kcmil; 6-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	6 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA96H / 15C96H, Burndy 472, T&B 94H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00863	AMKP2404	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP2404 (4/0, 6-pack)

OEM part number	AMKP2404	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 4/0; 6-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	6 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA71H, Burndy 298, T&B 66	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00864	AMKP250	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP250 (250 kcmil, 3-pack)

OEM part number	AMKP250	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 250 kcmil; 3-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	3 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA76, Burndy 324, T&B 71H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00873	AMKP2500	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP2500 (500 kcmil, 6-pack)

OEM part number	AMKP2500	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 500 kcmil; 6-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	6 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA106A / 15C106R, Burndy 300, T&B 99H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00875	AMKP2600	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP2600 (600 kcmil, 6-pack)

OEM part number	AMKP2600	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 600 kcmil; 6-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	6 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA115H / 15C115H, Burndy 473, T&B 106H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00877	AMKP2750	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP2750 (700/750 kcmil, 6-pack)

OEM part number	AMKP2750	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 700/750 kcmil; 6-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	6 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15C125H, Burndy 936, T&B 115H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00866	AMKP300	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP300 (300 kcmil, 3-pack)

OEM part number	AMKP300	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 300 kcmil; 3-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	3 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA87H / 15C87, Burndy 470, T&B 76	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00860	AMKP303	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP303 (3/0, 3-pack)

OEM part number	AMKP303	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 3/0; 3-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	3 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA66, Burndy 467, T&B 60	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00868	AMKP350	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP350 (350 kcmil, 3-pack)

OEM part number	AMKP350	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 350 kcmil; 3-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	3 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA96H / 15C96H, Burndy 299, T&B 87H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00870	AMKP400	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP400 (400 kcmil, 3-pack)

OEM part number	AMKP400	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 400 kcmil; 3-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	3 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA96H / 15C96H, Burndy 472, T&B 94H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00862	AMKP404	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP404 (4/0, 3-pack)

OEM part number	AMKP404	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 4/0; 3-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	3 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA71H, Burndy 298, T&B 66	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00872	AMKP500	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP500 (500 kcmil, 3-pack)

OEM part number	AMKP500	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 500 kcmil; 3-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	3 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA106A / 15C106R, Burndy 300, T&B 99H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00874	AMKP600	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP600 (600 kcmil, 3-pack)

OEM part number	AMKP600	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 600 kcmil; 3-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	3 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15CA115H / 15C115H, Burndy 473, T&B 106H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00876	AMKP750	GE	lug-kit	STATUS UNKNOWN

Spectra compression (crimp) lug kit AMKP750 (700/750 kcmil, 3-pack)

OEM part number	AMKP750	A	S650 9-113; oem_spec
Description	Compression lug kit to convert AML main mechanical lug modules (and ANK neutral main lug) to compression lugs; wire size 700/750 kcmil; 3-pack (6-pack for dual main)	A	S650 9-113 "Compression Lug Kits and Modules"; oem_spec
Kit contents	3 crimp lugs ("3 PACK"/"6 PACK" package type)	B	S650 9-113; inference
Fasteners	Crimp tool dies: Homac 15C125H, Burndy 936, T&B 115H	A	S650 9-113; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, lug manufacturer part number		

EDH-GEA-00878	KLP101	GE	lug-kit	STATUS UNKNOWN

Spectra ADS switch load-side lug kit KLP101 (#8-1/0 Cu/Al)

OEM part number	KLP101	A	S650 9-113; oem_spec
Description	Lug kit to replace standard load-side mechanical lugs on ADS branch switches; each kit includes 3 lugs; wire range #8-1/0 Cu/Al; lugs per phase 1	A	same as above
Application	ADS fusible switches 30, 60 or 100 A	A	same as above
Kit contents	3 lugs	A	same as above
OEM instruction document	GEH-5944 (Lug Kits into GE Type ADS Switches) (publication list)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, Torque values		

EDH-GEA-00879	KLP300	GE	lug-kit	STATUS UNKNOWN

Spectra ADS switch load-side lug kit KLP300 (#4-300 kcmil Cu/Al)

OEM part number	KLP300	A	S650 9-113; oem_spec
Description	Lug kit to replace standard load-side mechanical lugs on ADS branch switches; each kit includes 3 lugs; wire range #4-300 kcmil Cu/Al; lugs per phase 1	A	same as above
Application	ADS fusible switches 200 A	A	same as above
Kit contents	3 lugs	A	same as above
OEM instruction document	GEH-5944 (Lug Kits into GE Type ADS Switches) (publication list)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, Torque values		

EDH-GEA-00880	KLP500	GE	lug-kit	STATUS UNKNOWN

Spectra ADS switch load-side lug kit KLP500 (2/0-500 kcmil Cu/Al)

OEM part number	KLP500	A	S650 9-113; oem_spec
Description	Lug kit to replace standard load-side mechanical lugs on ADS branch switches; each kit includes 3 lugs; wire range 2/0-500 kcmil Cu/Al; lugs per phase 2, 4	A	same as above
Application	ADS fusible switches 800 or 1200 A	A	same as above
Kit contents	3 lugs	A	same as above
OEM instruction document	GEH-5944 (Lug Kits into GE Type ADS Switches) (publication list)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, Torque values		

EDH-GEA-00881	KLP600	GE	lug-kit	STATUS UNKNOWN

Spectra ADS switch load-side lug kit KLP600 (400-600 kcmil Cu/Al or 400-500 kcmil Cu)

OEM part number	KLP600	A	S650 9-113; oem_spec
Description	Lug kit to replace standard load-side mechanical lugs on ADS branch switches; each kit includes 3 lugs; wire range 400-600 kcmil Cu/Al or 400-500 kcmil Cu; lugs per phase 2, 4	A	same as above
Application	ADS fusible switches 800 or 1200 A	A	same as above
Kit contents	3 lugs	A	same as above
OEM instruction document	GEH-5944 (Lug Kits into GE Type ADS Switches) (publication list)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, Torque values		

EDH-GEA-00882	KLP750	GE	lug-kit	STATUS UNKNOWN

Spectra ADS switch load-side lug kit KLP750 (500-750 kcmil Al or 750 kcmil Cu)

OEM part number	KLP750	A	S650 9-113; oem_spec
Description	Lug kit to replace standard load-side mechanical lugs on ADS branch switches; each kit includes 3 lugs; wire range 500-750 kcmil Al or 750 kcmil Cu; lugs per phase 2, 4	A	same as above
Application	ADS fusible switches 800 or 1200 A	A	same as above
Kit contents	3 lugs	A	same as above
OEM instruction document	GEH-5944 (Lug Kits into GE Type ADS Switches) (publication list)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00540	**252B3638**	Spectra main lug assembly drawing 252B3638 (G1-G10)	—	unknown
EDH-GEA-00541	**GEA2-750**	Spectra main lug GEA2-750	—	unknown

EDH-GEA-00540	252B3638	GE / ABB lineage	lug	STATUS UNKNOWN

Spectra main lug assembly drawing 252B3638 (G1-G10)

OEM part number	252B3638	**A**	S419 DEH071 p.2 Table 1; oem_spec
Alternate / superseded numbers	252B3638G1-G2 (450 in-lb; (4) 2/0-600 kcmil)	**A**	S419 style_number; Table 1; oem_spec
	252B3638G3-G8 [style_number] (450 in-lb; (8) 2/0-600 kcmil)	**A**	same as above
	252B3638G9-G10 [style_number] (375 in-lb; (1) 8-500 kcmil / (1) #2/0-600 kcmil)	**A**	same as above
Description	Main lug (mechanical) assemblies used in Spectra AMB main lug kits	**A**	S418, S419 DEH070 p.2 / DEH071 p.2 Table 1; oem_spec
Torque values	Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	**A**	S418, S419 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	G-number by kit, Material		

EDH-GEA-00541	GEA2-750	GE / ABB lineage	lug	STATUS UNKNOWN

Spectra main lug GEA2-750

OEM part number	GEA2-750	**A**	S419 DEH071 Table 1; oem_spec
Description	Lug, (2) 3/0-750 kcmil, 475 in-lb, used in Spectra AMB main lug kits	**A**	S418, S419 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	kits using it, Material		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00119	**AMCB2FGMFP**	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P single)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00401	**AMCB2FJ**	Spectra bolt-on breaker strap kit AMCB2FJ (SF/TF, DEH059)	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3 **A**	unknown
EDH-GEA-00117	**AMCB2FJFP**	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P single)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00118	**AMCB2FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P single)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00403	**AMCB2GM**	Spectra bolt-on G-frame main/single-branch strap kit AMCB2GM (DEH060)	SGH, SGL, SGP; breaker cover kit AFP4SGS **A**	unknown
EDH-GEA-00120	**AMCB2GMFP**	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P single)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00407	**AMCB2KM**	Spectra bolt-on K-frame main strap kit AMCB2KM (DEH061)	SKH, SKL, SKP, TKM, THKM; breaker cover kit AFP6SKS **A**	unknown
EDH-GEA-00126	**AMCB2KMFP**	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THKM, 2P single)	SKH, SKL, SKP, TKM, THKM **A**	unknown
EDH-GEA-00123	**AMCB3FGMFP**	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P single)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00400	**AMCB3FJ**	Spectra bolt-on breaker strap kit AMCB3FJ (SF/TF, DEH059)	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3 **A**	unknown
EDH-GEA-00121	**AMCB3FJFP**	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P single)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00122	**AMCB3FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P single)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00404	**AMCB3GM**	Spectra bolt-on G-frame main/single-branch strap kit AMCB3GM (DEH060)	SGH, SGL, SGP; breaker cover kit AFP4SGS **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00124	**AMCB3GMFP**	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P single)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00408	**AMCB3KM**	Spectra bolt-on K-frame main strap kit AMCB3KM (DEH061)	SKH, SKL, SKP, TKM, THKM; breaker cover kit AFP6SKS **A**	unknown
EDH-GEA-00127	**AMCB3KMFP**	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THKM, 3P single)	SKH, SKL, SKP, TKM, THKM **A**	unknown
EDH-GEA-00125	**AMCB3LBFP**	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	SKP (as printed; LB code = THLC2/THLC4 per nomenclature) **A**	unknown
EDH-GEA-00398	**AMCB4EB**	Spectra bolt-on breaker strap kit AMCB4EB (TEB/TED/THED/SE, DEH047)	TEB, TED, THED, SED, SEH, SEL, SEP; for use with breaker cover (filler **A**	unknown
EDH-GEA-00098	**AMCB4EBFP**	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	TEB, TED **A**	unknown
EDH-GEA-00409	**AMCB4EY**	Spectra bolt-on TEY strap kit AMCB4EY (DEH062)	TEY; breaker cover kit AFP3EYD **A**	unknown
EDH-GEA-00099	**AMCB4EYFP**	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	TEY **A**	unknown
EDH-GEA-00100	**AMCB4FBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00101	**AMCB4FDBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FCL, 2P dual)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00113	**AMCB4FGBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00402	**AMCB4FJ**	Spectra bolt-on breaker strap kit AMCB4FJ (SF/TF, DEH059)	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3 **A**	unknown
EDH-GEA-00109	**AMCB4FJFP**	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00111	**AMCB4FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00405	**AMCB4GB**	Spectra bolt-on G-frame double-branch strap kit AMCB4GB (DEH40129)	SGH, SGL, SGP; breaker cover kit AFP4SGD **A**	unknown
EDH-GEA-00114	**AMCB4GBFP**	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00102	**AMCB4QDFP**	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	TQD, THQD **A**	unknown
EDH-GEA-00397	**AMCB4SE**	Spectra bolt-on breaker strap kit AMCB4SE (TEB/TED/THED/SE, DEH047)	TEB, TED, THED, SED, SEH, SEL, SEP; for use with breaker cover (filler **A**	unknown
EDH-GEA-00103	**AMCB4SEFP**	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SEP, 2P dual)	THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00396	**AMCB6EB**	Spectra bolt-on breaker strap kit AMCB6EB (TEB/TED/THED/SE, DEH047)	TEB, TED, THED, SED, SEH, SEL, SEP; for use with breaker cover (filler **A**	unknown
EDH-GEA-00104	**AMCB6EBFP**	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SEH, SEL, SEP, 3P dual)	TEB, TED, THED, SED, SEH, SEL, SEP **A**	superseded - ABB empower description reads "REPLCE BY AMCB6E
EDH-GEA-00410	**AMCB6EY**	Spectra bolt-on TEY strap kit AMCB6EY (DEH062)	TEY; breaker cover kit AFP3EYD **A**	unknown
EDH-GEA-00105	**AMCB6EYFP**	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	TEY **A**	unknown
EDH-GEA-00106	**AMCB6FBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P dual)	FBV, FBN, FBH, FBL **A**	superseded - ABB empower description reads "REPLACED BY AMCB
EDH-GEA-00107	**AMCB6FDBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FCL, 3P dual)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00115	**AMCB6FGBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P dual)	FGV, FGN, FGH, FGP **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00399	**AMCB6FJ**	Spectra bolt-on breaker strap kit AMCB6FJ (SF/TF, DEH059)	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3 A	unknown
EDH-GEA-00110	**AMCB6FJFP**	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	SFH, SFL, SFP A	superseded - ABB empower description reads "REPLACED BY AMCB
EDH-GEA-00112	**AMCB6FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P dual)	TFJ, TFK, THFK A	unknown
EDH-GEA-00406	**AMCB6GB**	Spectra bolt-on G-frame double-branch strap kit AMCB6GB (DEH40129)	SGH, SGL, SGP; breaker cover kit AFP4SGD A	unknown
EDH-GEA-00116	**AMCB6GBFP**	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	SGH, SGL, SGP A	superseded - ABB empower description reads "REPLCE BY AMCB6G
EDH-GEA-00108	**AMCB6QDFP**	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	TQD, THQD A	unknown
EDH-OTH-00048	**BAMCB35KMGE**	Aftermarket bus connection kit BAMCB35KMGE (seller cross-ref to GEA AMCB3KMFP)	mounts one SK frame breaker C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00046	**BAMCB3FJGE**	Aftermarket bus connection kit BAMCB3FJGE (seller cross-ref to GEA AMCB3FJFP)	mounts one SF frame breaker C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00047	**BAMCB3GMGE**	Aftermarket bus connection kit BAMCB3GMGE (seller cross-ref to GEA AMCB3GMFP)	mounts one SG frame breaker C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00049	**BAMCB6EBGE**	Aftermarket bus connection kit BAMCB6EBGE (seller cross-ref to GEA AMCB6EBFP)	mounts two TED or SE frame breakers C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00050	**BAMCB6EYGE**	Aftermarket bus connection kit BAMCB6EYGE (seller cross-ref to GEA AMCB6EYFP)	mounts two TEY frame breakers C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00052	**BAMCB6FJGE**	Aftermarket bus connection kit BAMCB6FJGE (seller cross-ref to GEA AMCB6FJFP)	mounts two SF frame breakers C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00053	**BAMCB6GBGE**	Aftermarket bus connection kit BAMCB6GBGE (seller cross-ref to GEA AMCB6GBFP)	mounts two SG frame breakers C	current aftermarket item; listing label 'GE/ABB Aftermarket
EDH-OTH-00051	**BAMCB6QDGE**	Aftermarket bus connection kit BAMCB6QDGE (seller cross-ref to GEA AMCB6QDFP)	mounts two TQD frame breakers C	current aftermarket item; listing label 'GE/ABB Aftermarket

EDH-GEA-00119	**AMCB2FGMFP**	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P single)

OEM part number	AMCB2FGMFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FGM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00401	AMCB2FJ	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB2FJ (SF/TF, DEH059)

OEM part number	AMCB2FJ	A	S398 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for main or single-branch mounting in APNB interiors	A	same as above
Application	main (load/OFF-side terminals on straps) or single branch (line/ON-side terminals on straps)	A	S398 p.2 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S398 DEH059 pp.1-2; oem_spec
Breaker compatibility	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3SFD, AFP3TFS, AFP3TFD ("TF, and TH" as printed (TFJ/TFK/THFK family))	A	S398 p.1; oem_spec
Poles	2 (configurations per Table 3)	A	S398 p.1; p.2 Table 3; oem_spec
Kit contents	Main/single-branch (Table 1): 1 A pole strap (1); 2 carriage bolt 1/4-20 x 1.50 [or 1/4-20 x 1.00 when single-breaker straps connect to a vertical bus rated 600 A or less] (6); 3 1/4 in Belleville washer (6); 4 1/4-20 nut (6); 5 B pole strap (1); 6 C pole strap (1); 7 breaker mounting bracket (1); 8 breaker mounting bracket (1); 9 thread-forming screw (4); 10 1/4-20 x 3/4 in machine screw (3); 11 1/4 in Belleville washer (3); 12 #10-32 x 3-3/4 in machine screw (2); 13 #10 flat washer (2); 14 #10-32 x 1/2 in machine screw (2); 15 #10 lock washer (2); 16 antiturn clip (6); 17 strap spacer (3)	A	S398 p.1 Table 1; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips (clip pin into small hole in strap; bolt in front square hole of vertical bus), 1/4 in Belleville washers and nuts; UL-recognized 105 C thermoplastic tape (OANZ2, Permacel P-30-105 or 3M 66R) on unused strap contact surfaces; overlap > 1/2 each turn; minimum 0.028 in = two complete layers of overlapping turns	A	S398 pp.1-2; oem_spec
Torque values	Single/main: cover support to bracket #10-32 x 1/2 in screws with lock washers 18 in-lb; opposite bracket thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in screws with flat washers 30 in-lb; terminal to strap 1/4-20 x 3/4 in screws with Belleville washers 50 in-lb; strap-to-vertical-bus 65 in-lb	A	S398 p.2 steps 2-4; oem_spec
OEM instruction document	DEH059 R02 (09/2001) Installation Instructions; replacement hardware kit AHKBF1	A	S398 p.1, p.6; oem_spec
Identification features	Main/single-branch kit includes 3 strap spacers used for left-hand cable connection (strap and spacer square holes aligned; carriage bolt passes through both)	A	S398 p.1 step 1a/1b; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AHKBF1 (EDH-GEA-00195)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00117	AMCB2FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P single)

OEM part number	AMCB2FJFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S143 p.11-43; oem_spec
	empower: "BOLT ON STRAP KIT SF W/FILLER" (UPC 783175336050)	A	S426 empower page AMCB2FJFP; oem_spec
Application	main or branch (single-mounted)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S398 DEH059; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Torque values	Single/main: cover support to bracket #10-32 x 1/2 in screws with lock washers 18 in-lb; opposite bracket thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in screws with flat washers 30 in-lb; terminal to strap 1/4-20 x 3/4 in screws with Belleville washers 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S398 DEH059 p.2; inference
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S143 p.11-52; inference
	Strap portion installs per DEH059 R02 (kit AMCB2FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S398, S426 DEH059 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00118	AMCB2FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P single)

OEM part number	AMCB2FJFPTF	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S398 DEH059; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Torque values	Single/main: cover support to bracket #10-32 x 1/2 in screws with lock washers 18 in-lb; opposite bracket thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in screws with flat washers 30 in-lb; terminal to strap 1/4-20 x 3/4 in screws with Belleville washers 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S398 DEH059 p.2; inference
OEM instruction document	Strap portion installs per DEH059 R02 (kit AMCB2FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S398, S426 DEH059 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00403	AMCB2GM	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on G-frame main/single-branch strap kit AMCB2GM (DEH060)

OEM part number	AMCB2GM	A	S399 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for main and single-branch G-frame breakers in APNB interiors	A	same as above
Application	main (load/OFF-side terminals on straps) or single branch	A	S399 p.6 step 7; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S399 DEH060; oem_spec
Breaker compatibility	SGH, SGL, SGP; breaker cover kit AFP4SGS	A	S399 p.1; oem_spec
Poles	2 (A&C or A&B locations)	A	S399 p.1; p.7 Fig.35; oem_spec
Kit contents	Table 1 (Qty AMCB2GM / AMCB3GM): 1 10083041P1 terminal cover 1/1; 2 192A6976P189 thread-forming screw #10-32 x 7/16 in 2/2; 3 252B3576P1 circuit breaker mounting bracket 1/1; 4 252B3613P1 antiturn clip 4/6; 5 252B3618G13 G frame single strap 1/1; 6 252B3618G14 G frame single strap 1/1; 7 252B3618G15 G frame single strap 1/1; 8 252B3657P1 spacer 1/1; 9 252B3657P2 spacer 2/2; 10 75A105503P101 conical spring washer 1/4 in 4/6; 11 75A105503P105 conical spring washer 5/16 in 2/3; 12 DEH060 instructions 1/1; 13 N22P23016B6 hex-head bolt 3/8-16 x 1 in 2/3; 14 N245P21B6 nut 1/4-20 4/6; 15 N37P21060B6 screw 1/4-20 x 3-3/4 in 2/2; 16 N402P11B6 flat washer 1/4 in 2/2; 17 N657P21024B6 carriage bolt 1/4-20 x 1-1/2 in 4/6; 18 N730BP1308B6 thread-forming screw #6 x 1/2 in 2/2	A	S399 p.1 Table 1; oem_spec
Dimensions	Vertical space required 5.50 in (4X)	A	S399 p.1; oem_spec
Fasteners	Cable connection on same side as 2.75 in reference: only 3 (AMCB3GM) / 2 (AMCB2GM) carriage bolts+antiturn clips used, no spacers; opposite side: 6/4 used with spacers 252B3657P1/P2. Terminal cover fixed with #6 thread-forming screws (Table lists 3/8-16 hex bolts with 5/16 in conical washers as printed)	A	S399 p.2 step 3; p.7 step 9; oem_spec
Torque values	Breaker mounting bracket thread-forming screws 30 in-lb; breaker to bracket (1/4-20 x 3-3/4 in machine screws + flat washers) 50 in-lb; breaker terminals to threaded strap holes (hex bolts + conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	A	S399 pp.6-7 steps 6-8; oem_spec
OEM instruction document	DEH060 R04 (09/2001); replacement hardware kit AHKBG1	A	S399 p.1, p.8; oem_spec
Identification features	Terminal cover requires a 3/8 x 3/8 in relief hole when mounted as a main with an accessory cable leaving the load end	A	S399 p.7 step 9; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	252B3618G13 (EDH-GEA-00416), 252B3618G14 (EDH-GEA-00417), 252B3618G15 (EDH-GEA-00418), 252B3576P1 (EDH-GEA-00413), 10083041P1 (EDH-GEA-00411), AHKBG1 (EDH-GEA-00196)		
Not yet documented	Finish / plating, Material		

EDH-GEA-00120	AMCB2GMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P single)

OEM part number	AMCB2GMFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2GM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S399 DEH060; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
	Vertical space 5.50 in (4X)	B	S399 DEH060 p.1; inference
Torque values	Breaker mounting bracket thread-forming screws 30 in-lb; breaker to bracket (1/4-20 x 3-3/4 in machine screws + flat washers) 50 in-lb; breaker terminals to threaded strap holes (hex bolts + conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	B	S399 DEH060 pp.6-7; inference
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S143 p.11-52; oem_spec
	Strap portion per DEH060 R04 (kit AMCB2GM); FP adds filler kit AFP4SGS	B	S399, S426 DEH060 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00407	AMCB2KM	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on K-frame main strap kit AMCB2KM (DEH061)

OEM part number	AMCB2KM	A	S400 p.1; oem_spec
Description	Spectra bolt-on kit to install K-frame main circuit breakers into APNB bolt-on interiors	A	same as above
Application	main (strap-assembly bolts pass through the load/OFF-side terminals)	A	S400 p.1 step 5; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S400 DEH061; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM; breaker cover kit AFP6SKS	A	S400 p.1; oem_spec
Poles	2	A	S400 p.1 Table 2; oem_spec
Kit contents	Table 1 (Qty AMCB2KM / AMCB3KM): 1 A pole strap assembly 1/1; 2 carriage bolt 1/4-20 x 1-1/2 in 4/6; 3 conical spring washer 1/4 in 4/6; 4 nut 1/4-20 4/6; 5 B pole strap assembly 1/1; 6 C pole strap assembly 1/1; 7 breaker mounting bracket 2/2; 8 thread-forming screw 4/4; 9 conical spring washer 3/8 in 2/3; 10 nut 3/8-16 2/3; 11 screw 1/4-20 x 1-1/4 in 4/4; 12 flat washer 1/4 in 4/4	A	S400 p.1 Table 1; oem_spec
Fasteners	Each strap assembly fastened to vertical bus with two 1/4-20 carriage bolts, conical washers and nuts	A	S400 p.1 step 3; oem_spec
Torque values	Breaker mounting brackets (two thread-forming screws each) 35 in-lb; breaker base to brackets (1/4-20 x 1-1/4 in screws + flat washers) 50 in-lb; load-side breaker terminals to strap-assembly bolts (3/8-16 nuts + 3/8 in conical washers) 275 in-lb; strap-to-vertical-bus 65 in-lb	A	S400 p.1 steps 4-6; oem_spec
OEM instruction document	DEH061 R02 (09/2001)	A	S400 p.1-2; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00126	AMCB2KMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THKM, 2P single)

OEM part number	AMCB2KMFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2KM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S400 DEH061; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in	A	same as above
Torque values	Breaker mounting brackets (two thread-forming screws each) 35 in-lb; breaker base to brackets (1/4-20 x 1-1/4 in screws + flat washers) 50 in-lb; load-side breaker terminals to strap-assembly bolts (3/8-16 nuts + 3/8 in conical washers) 275 in-lb; strap-to-vertical-bus 65 in-lb	B	S400 DEH061 p.1; inference
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S143 p.11-52; oem_spec
	Strap portion per DEH061 R02 (kit AMCB2KM); FP adds filler kit AFP6SKS (GEH5629)	B	S400, S404 DEH061 p.1; GEH5629 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00123	AMCB3FGMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P single)

OEM part number	AMCB3FGMFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FGM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S143 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00400	AMCB3FJ	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB3FJ (SF/TF, DEH059)

OEM part number	AMCB3FJ	A	S398 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for main or single-branch mounting in APNB interiors	A	same as above
	empower: "BOLT-ON STRAP KIT SF SB" (UPC 783175333820)	A	S426 empower page AMCB3FJ; oem_spec
Application	main (load/OFF-side terminals on straps) or single branch (line/ON-side terminals on straps)	A	S398 p.2 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S398 DEH059 pp.1-2; oem_spec
Breaker compatibility	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3SFD, AFP3TFS, AFP3TFD ("TF, and TH" as printed (TFJ/TFK/THFK family))	A	S398 p.1; oem_spec
Poles	3	A	S398 p.1; p.2 Table 3; oem_spec
Kit contents	Main/single-branch (Table 1): 1 A pole strap (1); 2 carriage bolt 1/4-20 x 1.50 [or 1/4-20 x 1.00 when single-breaker straps connect to a vertical bus rated 600 A or less] (6); 3 1/4 in Belleville washer (6); 4 1/4-20 nut (6); 5 B pole strap (1); 6 C pole strap (1); 7 breaker mounting bracket (1); 8 breaker mounting bracket (1); 9 thread-forming screw (4); 10 1/4-20 x 3/4 in machine screw (3); 11 1/4 in Belleville washer (3); 12 #10-32 x 3-3/4 in machine screw (2); 13 #10 flat washer (2); 14 #10-32 x 1/2 in machine screw (2); 15 #10 lock washer (2); 16 antiturn clip (6); 17 strap spacer (3)	A	S398 p.1 Table 1; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips (clip pin into small hole in strap; bolt in front square hole of vertical bus), 1/4 in Belleville washers and nuts; UL-recognized 105 C thermoplastic tape (OANZ2, Permacel P-30-105 or 3M 66R) on unused strap contact surfaces; overlap > 1/2 each turn; minimum 0.028 in = two complete layers of overlapping turns	A	S398 pp.1-2; oem_spec
Torque values	Single/main: cover support to bracket #10-32 x 1/2 in screws with lock washers 18 in-lb; opposite bracket thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in screws with flat washers 30 in-lb; terminal to strap 1/4-20 x 3/4 in screws with Belleville washers 50 in-lb; strap-to-vertical-bus 65 in-lb	A	S398 p.2 steps 2-4; oem_spec
OEM instruction document	DEH059 R02 (09/2001) Installation Instructions; replacement hardware kit AHKBF1	A	S398 p.1, p.6; oem_spec
Identification features	Main/single-branch kit includes 3 strap spacers used for left-hand cable connection (strap and spacer square holes aligned; carriage bolt passes through both)	A	S398 p.1 step 1a/1b; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AHKBF1 (EDH-GEA-00195)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00121	AMCB3FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P single)

OEM part number	AMCB3FJFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S143 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT SF SB W/FILLER" (UPC 783175335916)	A	S426 empower page AMCB3FJFP; oem_spec
Application	main or branch (single-mounted)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S398 DEH059; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above

Torque values	Single/main: cover support to bracket #10-32 x 1/2 in screws with lock washers 18 in-lb; opposite bracket thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in screws with flat washers 30 in-lb; terminal to strap 1/4-20 x 3/4 in screws with Belleville washers 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S398 DEH059 p.2; inference
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S143 p.11-52; inference
	Strap portion installs per DEH059 R02 (kit AMCB3FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S398, S426 DEH059 p.1; inference
Replacement / successor	ABB Tmax XT retrofit kit SRFB3XT4FPX (or SRFB3XT4FPK with Kirk lock provision) for Tmax XT4, 250 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served (retrofit replaces breaker and mounting hardware together; not a like-for-like strap kit)	A	S427 guide p.28 retrofit table; oem_spec
Aftermarket / reproduction	Breaker King offers BAMCB3FJGE (kit # SFS1K) as a replacement ('Kit SFS1K; Replaces OEM AMCB3FJFP'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00122 AMCB3FJFPTF GE branch-connector-kit STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P single)

OEM part number	AMCB3FJFPTF	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S143 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S398 DEH059; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Torque values	Single/main: cover support to bracket #10-32 x 1/2 in screws with lock washers 18 in-lb; opposite bracket thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in screws with flat washers 30 in-lb; terminal to strap 1/4-20 x 3/4 in screws with Belleville washers 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S398 DEH059 p.2; inference
OEM instruction document	Strap portion installs per DEH059 R02 (kit AMCB3FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S398, S426 DEH059 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00404 AMCB3GM GE / ABB lineage branch-connector-kit STATUS UNKNOWN

Spectra bolt-on G-frame main/single-branch strap kit AMCB3GM (DEH060)

OEM part number	AMCB3GM	A	S399 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for main and single-branch G-frame breakers in APNB interiors	A	same as above
	empower: "BOLT-ON STRAP KIT SG MAIN" (UPC 783175333844)	A	S426 empower page AMCB3GM; oem_spec
Application	main (load/OFF-side terminals on straps) or single branch	A	S399 p.6 step 7; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S399 DEH060; oem_spec
Breaker compatibility	SGH, SGL, SGP; breaker cover kit AFP4SGS	A	S399 p.1; oem_spec
Poles	3	A	S399 p.1; p.7 Fig.35; oem_spec

Kit contents	Table 1 (Qty AMCB2GM / AMCB3GM): 1 10083041P1 terminal cover 1/1; 2 192A6976P189 thread-forming screw #10-32 x 7/16 in 2/2; 3 252B3576P1 circuit breaker mounting bracket 1/1; 4 252B3613P1 antiturn clip 4/6; 5 252B3618G13 G frame single strap 1/1; 6 252B3618G14 G frame single strap 1/1; 7 252B3618G15 G frame single strap 1/1; 8 252B3657P1 spacer 1/1; 9 252B3657P2 spacer 2/2; 10 75A105503P101 conical spring washer 1/4 in 4/6; 11 75A105503P105 conical spring washer 5/16 in 2/3; 12 DEH060 instructions 1/1; 13 N22P23016B6 hex-head bolt 3/8-16 x 1 in 2/3; 14 N245P21B6 nut 1/4-20 4/6; 15 N37P21060B6 screw 1/4-20 x 3-3/4 in 2/2; 16 N402P11B6 flat washer 1/4 in 2/2; 17 N657P21024B6 carriage bolt 1/4-20 x 1-1/2 in 4/6; 18 N730BP1308B6 thread-forming screw #6 x 1/2 in 2/2	A	S399 p.1 Table 1; oem_spec
Dimensions	Vertical space required 5.50 in (4X)	A	S399 p.1; oem_spec
Fasteners	Cable connection on same side as 2.75 in reference: only 3 (AMCB3GM) / 2 (AMCB2GM) carriage bolts+antiturn clips used, no spacers; opposite side: 6/4 used with spacers 252B3657P1/P2. Terminal cover fixed with #6 thread-forming screws (Table lists 3/8-16 hex bolts with 5/16 in conical washers as printed)	A	S399 p.2 step 3; p.7 step 9; oem_spec
Torque values	Breaker mounting bracket thread-forming screws 30 in-lb; breaker to bracket (1/4-20 x 3-3/4 in machine screws + flat washers) 50 in-lb; breaker terminals to threaded strap holes (hex bolts + conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	A	S399 pp.6-7 steps 6-8; oem_spec
OEM instruction document	DEH060 R04 (09/2001); replacement hardware kit AHKBG1	A	S399 p.1, p.8; oem_spec
Identification features	Terminal cover requires a 3/8 x 3/8 in relief hole when mounted as a main with an accessory cable leaving the load end	A	S399 p.7 step 9; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	252B3618G13 (EDH-GEA-00416), 252B3618G14 (EDH-GEA-00417), 252B3618G15 (EDH-GEA-00418), 252B3576P1 (EDH-GEA-00413), 10083041P1 (EDH-GEA-00411), AHKBG1 (EDH-GEA-00196)		
Not yet documented	Finish / plating, Material		

EDH-GEA-00124 AMCB3GMFP GE branch-connector-kit STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P single)

OEM part number	AMCB3GMFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3GM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S143 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT SG MAIN W/FILLER" (UPC 783175335947)	A	S426 empower page AMCB3GMFP; oem_spec
Application	main or branch (single-mounted)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S399 DEH060; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
	empower specification "Box/Front Height 4.375 in"	A	S426 empower page AMCB3GMFP; oem_spec
	Vertical space 5.50 in (4X)	B	S399 DEH060 p.1; inference
Torque values	Breaker mounting bracket thread-forming screws 30 in-lb; breaker to bracket (1/4-20 x 3-3/4 in machine screws + flat washers) 50 in-lb; breaker terminals to threaded strap holes (hex bolts + conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	B	S399 DEH060 pp.6-7; inference
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S143 p.11-52; oem_spec
	Strap portion per DEH060 R04 (kit AMCB3GM); FP adds filler kit AFP4SGS	B	S399, S426 DEH060 p.1; inference
Replacement / successor	ABB Tmax XT retrofit kit SRFB3XT5MFPX (or SRFB3XT5MFPK with Kirk lock provision) for Tmax XT5, 600 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served (retrofit replaces breaker and mounting hardware together; not a like-for-like strap kit)	A	S427 guide p.28 retrofit table; oem_spec

Aftermarket / reproduction	Breaker King offers BAMCB3GMGE (kit # SGS1K) as a replacement ('Kit SGS1K; Replaces OEM AMCB3GMFP'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00408 AMCB3KM — GE / ABB lineage — branch-connector-kit — STATUS UNKNOWN

Spectra bolt-on K-frame main strap kit AMCB3KM (DEH061)

OEM part number	AMCB3KM	A	S400 p.1; oem_spec
Description	Spectra bolt-on kit to install K-frame main circuit breakers into APNB bolt-on interiors	A	same as above
	empower: "BOLT-ON STRAP KIT SK MAIN" (UPC 783175333851)	A	S426 empower page AMCB3KM; oem_spec
Application	main (strap-assembly bolts pass through the load/OFF-side terminals)	A	S400 p.1 step 5; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S400 DEH061; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM; breaker cover kit AFP6SKS	A	S400 p.1; oem_spec
Poles	3	A	S400 p.1 Table 2; oem_spec
Kit contents	Table 1 (Qty AMCB2KM / AMCB3KM): 1 A pole strap assembly 1/1; 2 carriage bolt 1/4-20 x 1-1/2 in 4/6; 3 conical spring washer 1/4 in 4/6; 4 nut 1/4-20 4/6; 5 B pole strap assembly 1/1; 6 C pole strap assembly 1/1; 7 breaker mounting bracket 2/2; 8 thread-forming screw 4/4; 9 conical spring washer 3/8 in 2/3; 10 nut 3/8-16 2/3; 11 screw 1/4-20 x 1-1/4 in 4/4; 12 flat washer 1/4 in 4/4	A	S400 p.1 Table 1; oem_spec
Fasteners	Each strap assembly fastened to vertical bus with two 1/4-20 carriage bolts, conical washers and nuts	A	S400 p.1 step 3; oem_spec
Torque values	Breaker mounting brackets (two thread-forming screws each) 35 in-lb; breaker base to brackets (1/4-20 x 1-1/4 in screws + flat washers) 50 in-lb; load-side breaker terminals to strap-assembly bolts (3/8-16 nuts + 3/8 in conical washers) 275 in-lb; strap-to-vertical-bus 65 in-lb	A	S400 p.1 steps 4-6; oem_spec
OEM instruction document	DEH061 R02 (09/2001)	A	S400 p.1-2; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00127 AMCB3KMFP — GE — branch-connector-kit — STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THKM, 3P single)

OEM part number	AMCB3KMFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3KM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S143 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S400 DEH061; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in	A	same as above
Torque values	Breaker mounting brackets (two thread-forming screws each) 35 in-lb; breaker base to brackets (1/4-20 x 1-1/4 in screws + flat washers) 50 in-lb; load-side breaker terminals to strap-assembly bolts (3/8-16 nuts + 3/8 in conical washers) 275 in-lb; strap-to-vertical-bus 65 in-lb	B	S400 DEH061 p.1; inference
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S143 p.11-52; oem_spec

	Strap portion per DEH061 R02 (kit AMCB3KM); FP adds filler kit AFP6SKS (GEH5629)	B	S400, S404 DEH061 p.1; GEH5629 p.1; inference
Replacement / successor	ABB Tmax XT retrofit kit SRFB3XT7MFPX (or SRFB3XT7MFPK with Kirk lock provision) for Tmax XT7, 1200 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served (retrofit replaces breaker and mounting hardware together; not a like-for-like strap kit)	A	S427 guide p.28 retrofit table; oem_spec
Aftermarket / reproduction	Breaker King offers BAMCB35KMGE (kit # SKS1K) as a replacement ('Kit SKS1K; Replaces OEM AMCB35KMFP (sic; OEM catalog number is AMCB3KMFP)'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00125 **AMCB3LBFP** GE branch-connector-kit **STATUS UNKNOWN**

Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)

OEM part number	AMCB3LBFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3LB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SKP (as printed; LB code = THLC2/THLC4 per nomenclature)	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S143 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		
Open question	*AMCB3LBFP is listed for 'SKP 2-pole' but LB code = THLC2/THLC4 and the 3 = 3 poles: verify against OEM*		

EDH-GEA-00398	AMCB4EB	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB4EB (TEB/TED/THED/SE, DEH047)

OEM part number	AMCB4EB	**A**	S397 p.1; oem_spec
Description	Spectra Series bolt-on circuit breaker (strap) kit for APNB bolt-on interiors, without filler plate	**A**	same as above
Application	Branch (line or ON-side terminals rest on straps; opposite end supported by mounting brackets)	**A**	S397 p.1 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	**A**	S397 DEH047 p.1; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP; for use with breaker cover (filler) kits AFP3SED, AFP4SED, AFP2TED, AFP3TED	**A**	S397 p.1; oem_spec
Poles	1- or 2-pole configurations per Table 2; alternate 2X bracket for 4-pole 2X double-branch TEB/TED	**A**	S397 p.1, p.3 Table 2; oem_spec
Kit contents	Table 1 (single quantity column): 1 A&C pole outer straps (2); 2 A&C pole inner straps (2); 3 1/4-20 x 1.50 in carriage bolts (3); 4 1/4 in Belleville washers (3); 5 1/4-20 hex nuts (3); 6 B-pole straps (2); 7 breaker mounting brackets (2)*; 8 thread-forming screws (4); 9 screws with lockwashers (6); 10 8-32 x 2-3/4 in screws (4); 11 #8 cup washers (4); 12 antiturn clips (3). *Kit AMCB4EB uses an alternate 2X mounting bracket. Replacement hardware kit catalog number AHKBE1 (Table 1 has a single Qty column; quantities shown are for the three-strap-set assembly)	**A**	S397 p.1 Table 1; oem_spec
Dimensions	Alternate mounting bracket for four-pole 2X (2 x 1.38 in) double-branch assembly of TEB/TED breakers; both breakers in each branch fastened to center hole of each bracket	**A**	S397 p.3; oem_spec
Mounting-hole pattern	Outer (A, C) pole straps mounted back-to-back; leave 1.38 in (1X) between outer straps for the center (B) pole strap	**A**	S397 p.1 step 1; oem_spec
Fasteners	Strap assemblies: 1/4-20 x 1.50 in carriage bolt with antiturn clip (pin through circular hole in strap; bolt through square hole immediately below), 1/4 in Belleville washer, 1/4-20 hex nut; breakers: 8-32 x 2-3/4 in screws with #8 cup washers; line terminals: screws with lockwashers into threaded strap holes; Unused strap contact surfaces: multiple wrappings of UL Recognized 105 C thermoplastic tape (OANZ2), each turn overlapping > 1/2 of preceding turn, minimum tape thickness 0.013 in	**A**	S397 pp.1,3; oem_spec
Torque values	Breaker mounting brackets to side rails (thread-forming screws) 25 in-lb; breaker to bracket (8-32 sheet-metal screws with #8 cup washers) 20 in-lb; breaker line terminals to threaded strap holes 32 in-lb; strap-to-vertical-bus bolted connections 65 in-lb	**A**	S397 p.1 steps 2-4; oem_spec
OEM instruction document	DEH047 R02 (04/2001) Installation Instructions	**A**	S397 p.4; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AHKBE1 (EDH-GEA-00194)		
Not yet documented	Finish / plating, Material		

EDH-GEA-00098	AMCB4EBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)

OEM part number	AMCB4EBFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4EB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S397 DEH047 p.1; oem_spec
Breaker compatibility	TEB, TED	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Torque values	Breaker mounting brackets to side rails (thread-forming screws) 25 in-lb; breaker to bracket (8-32 sheet-metal screws with #8 cup washers) 20 in-lb; breaker line terminals to threaded strap holes 32 in-lb; strap-to-vertical-bus bolted connections 65 in-lb (applies to the strap kit contained in the FP kit)	B	S397 DEH047 p.1; inference
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	A	S143 p.11-52; oem_spec
	Strap portion installs per DEH047 R02 (kit AMCB4EB); FP suffix adds the breaker cover (filler) kit (AFP2TED) (DEH047 names base kits only; FP composition taken from BuyLog nomenclature and empower replacement text)	B	S397, S426 DEH047 p.1; empower AMCB4EBFP; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00409	AMCB4EY	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on TEY strap kit AMCB4EY (DEH062)

OEM part number	AMCB4EY	A	S401 p.1; oem_spec
Description	Spectra bolt-on kit to install TEY breakers into APNB bolt-on interiors	A	same as above
Application	double branch (line/ON-side terminals on straps)	A	S401 p.3 step 6; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S401 DEH062; oem_spec
Breaker compatibility	TEY; breaker cover kit AFP3EYD	A	S401 p.1; oem_spec
Poles	1- or 2-pole configurations (Table 2)	A	same as above
Kit contents	Table 1 (Qty AMCB4EY / AMCB6EY): 1 A pole strap assembly 1/1; 2 carriage bolt 1/4-20 x 1-1/2 in [1/4-20 x 1 in for vertical bus rated 600 A or less] 2/3; 3 conical spring washer 1/4 in 2/3; 4 nut 1/4-20 2/3; 5 B pole strap assembly 1/1; 6 C pole strap assembly 1/1; 7 lower mounting bracket 2/2; 8 thread-forming screw 4/4; 9 upper mounting bracket 2/2; 10 screw with lockwasher #8-32 x 1/4 in 4/4; 11 B-phase isolator 1/1; 12 antiturn clips 2/3	A	S401 p.1 Table 1; oem_spec
Torque values	Lower mounting brackets thread-forming screws 35 in-lb; breaker captive terminal screws into threaded strap holes 35 in-lb; upper bracket #8-32 screws 18 in-lb (after sliding bracket to engage the toothed section with the steel flange under the breaker); strap-to-vertical-bus 65 in-lb	A	S401 p.1 step 4; p.3 steps 6-7; oem_spec
OEM instruction document	DEH062 R02 (09/2001)	A	S401 p.1, p.4; oem_spec
Identification features	Kit includes a B-phase isolator whose flaps fold up into the grooves of the TEY housing between phases; straps installed starting with the pole farthest from the 2.75 in dimension, carriage bolt head opposite the 2.75 in side	A	S401 pp.1,3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00099	AMCB4EYFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)

OEM part number	AMCB4EYFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4EY (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S143 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT TEY W/FILLER" (UPC 783175336104)	A	S426 empower page AMCB4EYFP; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S401 DEH062; oem_spec
Breaker compatibility	TEY	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Torque values	Lower mounting brackets thread-forming screws 35 in-lb; breaker captive terminal screws into threaded strap holes 35 in-lb; upper bracket #8-32 screws 18 in-lb (after sliding bracket to engage the toothed section with the steel flange under the breaker); strap-to-vertical-bus 65 in-lb	B	S401 DEH062 pp.1-3; inference
OEM instruction document	DEH-062 (TEY)	A	S143 p.11-52; oem_spec
	Strap portion per DEH062 R02 (kit AMCB4EY); FP adds cover kit AFP3EYD	B	S401, S426 DEH062 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00100	AMCB4FBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P dual)

OEM part number	AMCB4FBFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00101	AMCB4FDBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FCL, 2P dual)

OEM part number	AMCB4FDBFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FDB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00113	AMCB4FGBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P dual)

OEM part number	AMCB4FGBFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FGB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00402	AMCB4FJ	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB4FJ (SF/TF, DEH059)

OEM part number	AMCB4FJ	A	S398 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for double-branch mounting in APNB interiors	A	same as above
Application	double branch	A	S398 p.2 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S398 DEH059 pp.1-2; oem_spec
Breaker compatibility	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3SFD, AFP3TFS, AFP3TFD ("TF, and TH" as printed (TFJ/TFK/THFK family))	A	S398 p.1; oem_spec
Poles	2 (configurations per Table 3)	A	S398 p.1; p.2 Table 3; oem_spec
Kit contents	Double-branch (Table 2): 18 A&C pole outer strap (2); 19 A&C pole inner strap (2); 20 carriage bolt 1/4-20 x 1.50 [x 1.00 for vertical bus <=600 A] (3); 21 1/4 in Belleville washer (3); 22 1/4-20 nut (3); 23 B pole strap (2); 24 breaker mounting bracket (2); 25 thread-forming screw (4); 26 1/4-20 x 3/4 in machine screw (6); 27 1/4 in Belleville washer (6); 28 #10-32 x 3-3/4 in machine screw (4); 29 #10 flat washer (4); 30 antiturn clip (3)	A	S398 p.1 Table 2; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips (clip pin into small hole in strap; bolt in front square hole of vertical bus), 1/4 in Belleville washers and nuts; UL-recognized 105 C thermoplastic tape (OANZ2, Permacel P-30-105 or 3M 66R) on unused strap contact surfaces; overlap > 1/2 each turn; minimum 0.028 in = two complete layers of overlapping turns	A	S398 pp.1-2; oem_spec
Torque values	Double-branch: brackets thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in 30 in-lb; line terminals 1/4-20 x 3/4 in 50 in-lb; strap-to-vertical-bus 65 in-lb	A	S398 p.2 steps 2-4; oem_spec
OEM instruction document	DEH059 R02 (09/2001) Installation Instructions; replacement hardware kit AHKBF1	A	S398 p.1, p.6; oem_spec
Identification features	Double-branch kit uses back-to-back outer and inner A&C straps and two B straps	A	S398 p.1 step 1a/1b; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AHKBF1 (EDH-GEA-00195)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00109	AMCB4FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)

OEM part number	AMCB4FJFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S143 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT SF DB W/FILLER" (UPC 783175336036)	A	S426 empower page AMCB4FJFP; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S398 DEH059; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in	A	same as above
Torque values	Double-branch: brackets thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in 30 in-lb; line terminals 1/4-20 x 3/4 in 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S398 DEH059 p.2; inference
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S143 p.11-52; inference
	Strap portion installs per DEH059 R02 (kit AMCB4FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S398, S426 DEH059 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00111	AMCB4FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P dual)

OEM part number	AMCB4FJFPTF	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S398 DEH059; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 36-44 in	A	same as above
Torque values	Double-branch: brackets thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in 30 in-lb; line terminals 1/4-20 x 3/4 in 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S398 DEH059 p.2; inference
OEM instruction document	Strap portion installs per DEH059 R02 (kit AMCB4FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S398, S426 DEH059 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00405	AMCB4GB	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on G-frame double-branch strap kit AMCB4GB (DEH40129)

OEM part number	AMCB4GB	**A**	S402 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for double-branch G-frame breakers in APNB interiors	**A**	same as above
Application	double branch	**A**	same as above
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	**A**	S402 DEH40129; oem_spec
Breaker compatibility	SGH, SGL, SGP; breaker cover kit AFP4SGD	**A**	S402 p.1; oem_spec
Poles	2 (A-B, A-C or B-C)	**A**	S402 pp.2-4; oem_spec
Kit contents	Table 1 (Qty AMCB4GB / AMCB6GB): 1 192A6976P189 thread-forming screw #10-32 x 7/16 in 4/4; 2 252B3575P1 circuit breaker mounting bracket 2/2; 3 208C2291P1 filler center 2/2; 4 252B3613P1 antiturn clip 2/3; 5 252B3618G10 G frame double strap 2/2; 6 252B3618G11 G frame double strap 1/1; 7 75A105503P101 conical spring washer 1/4 in 4/4; 8 75A105503P105 conical spring washer 5/16 in 4/6; 9 DEH40129 instructions 1/1; 10 N22P23012B6 hex-head bolt 5/16-18 x 3/4 in 4/6; 11 N245P21B6 nut 1/4-20 2/3; 12 N37P21969B6 machine screw 1/4-20 x 3-3/4 in 4/4; 13 N402P11B6 flat washer 1/4 in 4/4; 14 N657P21024B6 carriage bolt 1/4-20 x 1-1/2 in 2/3; 15 N730BP1308B6 thread-forming screw #6 x 1/2 in 4/4	**A**	S402 p.1 Table 1; oem_spec
Dimensions	Vertical space required 5.50 in (4X)	**A**	S402 p.1; oem_spec
Fasteners	Unused branch: strap contact blocks covered with two layers of UL-recognized 105 C thermoplastic tape (OANZ2, e.g. Permacel P-30-105 or 3M 66R), min 0.013 in	**A**	S402 p.5 step 10; oem_spec
Torque values	Breaker mounting brackets thread-forming screws 30 in-lb; breakers to brackets (1/4-20 x 3-3/4 in screws + flat washers) 18 in-lb; line terminals to strap contact blocks (5/16-18 x 3/4 in hex bolts + 5/16 conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	**A**	S402 pp.4-5 steps 6-9; oem_spec
OEM instruction document	DEH40129 R03 (09/2001)	**A**	S402 p.1, p.6; oem_spec
Identification features	G-frame double straps carry threaded strap contact blocks on which the breaker line terminals rest; terminal cover installed over centre of assembly	**A**	S402 pp.4-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	252B3618G10 (EDH-GEA-00419), 252B3618G11 (EDH-GEA-00420), 252B3575P1 (EDH-GEA-00414), 208C2291P1 (EDH-GEA-00423)		
Not yet documented	Finish / plating, Material		

EDH-GEA-00114	AMCB4GBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)

OEM part number	AMCB4GBFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4GB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S402 DEH40129; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in	A	same as above
Torque values	Breaker mounting brackets thread-forming screws 30 in-lb; breakers to brackets (1/4-20 x 3-3/4 in screws + flat washers) 18 in-lb; line terminals to strap contact blocks (5/16-18 x 3/4 in hex bolts + 5/16 conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	B	S402 DEH40129 pp.4-5; inference
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S143 p.11-52; oem_spec
	Strap portion per DEH40129 R03 (kit AMCB4GB); FP adds filler kit AFP4SGD	B	S402, S426 DEH40129 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00102	AMCB4QDFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)

OEM part number	AMCB4QDFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4QD (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TQD, THQD	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Kit contents	A&C pole outer strap; A&C pole inner strap; carriage bolt 1/4-20; conical spring washer; nut 1/4-20; B pole strap; inner mounting bracket; thread-forming screw; outer mounting bracket; screw 1/4-20; conical spring washer; screw #10-32 x 2-x/x in; lock washer #10; antiturn clip (quantities not legible in mirror)	A	S154 DEH065 Table 1; oem_spec
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	S143 p.11-43; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips, conical spring washers and nuts; unused strap surfaces insulated with UL 105 C tape (min 0.013 in)	A	S154 DEH065 steps 3, 6; oem_spec
Torque values	Bracket thread-forming screws 35 in-lb; breaker-to-bracket #10-32 screws 35 in-lb; line terminal to strap 1/4-20 screws 50 in-lb	A	S154 DEH065 steps 4-5; oem_spec
OEM instruction document	DEH065 (Spectra Series Power Panelboards Bolt-On Circuit Breaker Kits AMCB6QD/AMCB4QD)	A	S154, S143 DEH065 p.1; BuyLog p.11-52; oem_spec
Identification features	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole	A	S154 DEH065 step 2-3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		

Requires	AFP2QDD (EDH-GEA-00128)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00397	**AMCB4SE**	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB4SE (TEB/TED/THED/SE, DEH047)

OEM part number	AMCB4SE	**A**	S397 p.1; oem_spec
Description	Spectra Series bolt-on circuit breaker (strap) kit for APNB bolt-on interiors, without filler plate	**A**	same as above
Application	Branch (line or ON-side terminals rest on straps; opposite end supported by mounting brackets)	**A**	S397 p.1 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	**A**	S397 DEH047 p.1; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP; for use with breaker cover (filler) kits AFP3SED, AFP4SED, AFP2TED, AFP3TED	**A**	S397 p.1; oem_spec
Poles	1/2-pole configurations per DEH047 Table 2	**A**	S397 p.1, p.3 Table 2; oem_spec
Kit contents	Table 1 (single quantity column): 1 A&C pole outer straps (2); 2 A&C pole inner straps (2); 3 1/4-20 x 1.50 in carriage bolts (3); 4 1/4 in Belleville washers (3); 5 1/4-20 hex nuts (3); 6 B-pole straps (2); 7 breaker mounting brackets (2)*; 8 thread-forming screws (4); 9 screws with lockwashers (6); 10 8-32 x 2-3/4 in screws (4); 11 #8 cup washers (4); 12 antiturn clips (3). *Kit AMCB4EB uses an alternate 2X mounting bracket. Replacement hardware kit catalog number AHKBE1 (Table 1 has a single Qty column; quantities shown are for the three-strap-set assembly)	**A**	S397 p.1 Table 1; oem_spec
Mounting-hole pattern	Outer (A, C) pole straps mounted back-to-back; leave 1.38 in (1X) between outer straps for the center (B) pole strap	**A**	S397 p.1 step 1; oem_spec
Fasteners	Strap assemblies: 1/4-20 x 1.50 in carriage bolt with antiturn clip (pin through circular hole in strap; bolt through square hole immediately below), 1/4 in Belleville washer, 1/4-20 hex nut; breakers: 8-32 x 2-3/4 in screws with #8 cup washers; line terminals: screws with lockwashers into threaded strap holes; Unused strap contact surfaces: multiple wrappings of UL Recognized 105 C thermoplastic tape (OANZ2), each turn overlapping > 1/2 of preceding turn, minimum tape thickness 0.013 in	**A**	S397 pp.1,3; oem_spec
Torque values	Breaker mounting brackets to side rails (thread-forming screws) 25 in-lb; breaker to bracket (8-32 sheet-metal screws with #8 cup washers) 20 in-lb; breaker line terminals to threaded strap holes 32 in-lb; strap-to-vertical-bus bolted connections 65 in-lb	**A**	S397 p.1 steps 2-4; oem_spec
OEM instruction document	DEH047 R02 (04/2001) Installation Instructions	**A**	S397 p.4; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AHKBE1 (EDH-GEA-00194)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00103	AMCB4SEFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SEP, 2P dual)

OEM part number	AMCB4SEFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4SE (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S143 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT SE W/FILLER" (UPC 783175336012)	A	S426 empower page AMCB4SEFP; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S397 DEH047 p.1; oem_spec
Breaker compatibility	THED, SED, SEH, SEL, SEP	A	S143 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Torque values	Breaker mounting brackets to side rails (thread-forming screws) 25 in-lb; breaker to bracket (8-32 sheet-metal screws with #8 cup washers) 20 in-lb; breaker line terminals to threaded strap holes 32 in-lb; strap-to-vertical-bus bolted connections 65 in-lb (applies to the strap kit contained in the FP kit)	B	S397 DEH047 p.1; inference
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	A	S143 p.11-52; oem_spec
	Strap portion installs per DEH047 R02 (kit AMCB4SE); FP suffix adds the breaker cover (filler) kit (AFP3SED or AFP4SED (not stated)) (DEH047 names base kits only; FP composition taken from BuyLog nomenclature and empower replacement text)	B	S397, S426 DEH047 p.1; empower AMCB4SEFP; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00396	AMCB6EB	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB6EB (TEB/TED/THED/SE, DEH047)

OEM part number	AMCB6EB	A	S397 p.1; oem_spec
Description	Spectra Series bolt-on circuit breaker (strap) kit for APNB bolt-on interiors, without filler plate	A	same as above
	empower: "BOLT-ON STRAP KIT SE" (UPC 783175333806)	A	S426 empower page AMCB6EB; oem_spec
Application	Branch (line or ON-side terminals rest on straps; opposite end supported by mounting brackets)	A	S397 p.1 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S397 DEH047 p.1; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP; for use with breaker cover (filler) kits AFP3SED, AFP4SED, AFP2TED, AFP3TED	A	S397 p.1; oem_spec
Poles	3 (three-phase, double-branch)	A	S397 p.1, p.3 Table 2; oem_spec
Kit contents	Table 1 (single quantity column): 1 A&C pole outer straps (2); 2 A&C pole inner straps (2); 3 1/4-20 x 1.50 in carriage bolts (3); 4 1/4 in Belleville washers (3); 5 1/4-20 hex nuts (3); 6 B-pole straps (2); 7 breaker mounting brackets (2)*; 8 thread-forming screws (4); 9 screws with lockwashers (6); 10 8-32 x 2-3/4 in screws (4); 11 #8 cup washers (4); 12 antiturn clips (3). *Kit AMCB4EB uses an alternate 2X mounting bracket. Replacement hardware kit catalog number AHKBE1 (Table 1 has a single Qty column; quantities shown are for the three-strap-set assembly)	A	S397 p.1 Table 1; oem_spec
Mounting-hole pattern	Outer (A, C) pole straps mounted back-to-back; leave 1.38 in (1X) between outer straps for the center (B) pole strap	A	S397 p.1 step 1; oem_spec
Fasteners	Strap assemblies: 1/4-20 x 1.50 in carriage bolt with antiturn clip (pin through circular hole in strap; bolt through square hole immediately below), 1/4 in Belleville washer, 1/4-20 hex nut; breakers: 8-32 x 2-3/4 in screws with #8 cup washers; line terminals: screws with lockwashers into threaded strap holes; Unused strap contact surfaces: multiple wrappings of UL Recognized 105 C thermoplastic tape (OANZ2), each turn overlapping > 1/2 of preceding turn, minimum tape thickness 0.013 in	A	S397 pp.1,3; oem_spec
Torque values	Breaker mounting brackets to side rails (thread-forming screws) 25 in-lb; breaker to bracket (8-32 sheet-metal screws with #8 cup washers) 20 in-lb; breaker line terminals to threaded strap holes 32 in-lb; strap-to-vertical-bus bolted connections 65 in-lb	A	S397 p.1 steps 2-4; oem_spec
OEM instruction document	DEH047 R02 (04/2001) Installation Instructions	A	S397 p.4; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AHKBE1 (EDH-GEA-00194)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00104	AMCB6EBFP	GE	branch-connector-kit	SUPERSEDED - ABB EMPOW

Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SEH, SEL, SEP, 3P dual)

OEM part number	AMCB6EBFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6EB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S143 p.11-43; oem_spec
	empower: "BOLT-ON REPLCE BY AMCB6EB + AFP3SED" (UPC 783175335886)	A	S426 empower page AMCB6EBFP; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S397 DEH047 p.1; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above

	empower specification "Box/Front Height 3.375 in"	A	S426 empower page AMCB6EBFP; oem_spec
Torque values	Breaker mounting brackets to side rails (thread-forming screws) 25 in-lb; breaker to bracket (8-32 sheet-metal screws with #8 cup washers) 20 in-lb; breaker line terminals to threaded strap holes 32 in-lb; strap-to-vertical-bus bolted connections 65 in-lb (applies to the strap kit contained in the FP kit)	B	S397 DEH047 p.1; inference
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	A	S143 p.11-52; oem_spec
	Strap portion installs per DEH047 R02 (kit AMCB6EB); FP suffix adds the breaker cover (filler) kit (AFP3SED) (DEH047 names base kits only; FP composition taken from BuyLog nomenclature and empower replacement text)	B	S397, S426 DEH047 p.1; empower AMCB6EBFP; inference
Status	superseded - ABB empower description reads "REPLCE BY AMCB6EB + AFP3SED"	A	S426 empower page AMCB6EBFP; oem_spec
Replacement / successor	empower (ABB) lists AMCB6EBFP as "REPLCE BY AMCB6EB + AFP3SED"	A	same as above
	ABB Tmax XT retrofit kit SRFB6XT1FPX (or SRFB6XT1FPK with Kirk lock provision) for Tmax XT1, 125 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served (retrofit replaces breaker and mounting hardware together; not a like-for-like strap kit)	A	S427 guide p.28 retrofit table; oem_spec
Aftermarket / reproduction	Breaker King offers BAMCB6EBGE (kit # SED1K) as a replacement ('Kit SED1K; Replaces OEM AMCB6EBFP'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	hole pattern, Material, strap dimensions		

EDH-GEA-00410 AMCB6EY — GE / ABB lineage — branch-connector-kit — STATUS UNKNOWN

Spectra bolt-on TEY strap kit AMCB6EY (DEH062)

OEM part number	AMCB6EY	A	S401 p.1; oem_spec
Description	Spectra bolt-on kit to install TEY breakers into APNB bolt-on interiors	A	same as above
	empower: "BOLT-ON STRAP KIT TEY" (UPC 783175333868)	A	S426 empower page AMCB6EY; oem_spec
Application	double branch (line/ON-side terminals on straps)	A	S401 p.3 step 6; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S401 DEH062; oem_spec
Breaker compatibility	TEY; breaker cover kit AFP3EYD	A	S401 p.1; oem_spec
Poles	3	A	same as above
Kit contents	Table 1 (Qty AMCB4EY / AMCB6EY): 1 A pole strap assembly 1/1; 2 carriage bolt 1/4-20 x 1-1/2 in [1/4-20 x 1 in for vertical bus rated 600 A or less] 2/3; 3 conical spring washer 1/4 in 2/3; 4 nut 1/4-20 2/3; 5 B pole strap assembly 1/1; 6 C pole strap assembly 1/1; 7 lower mounting bracket 2/2; 8 thread-forming screw 4/4; 9 upper mounting bracket 2/2; 10 screw with lockwasher #8-32 x 1/4 in 4/4; 11 B-phase isolator 1/1; 12 antiturn clips 2/3	A	S401 p.1 Table 1; oem_spec
Torque values	Lower mounting brackets thread-forming screws 35 in-lb; breaker captive terminal screws into threaded strap holes 35 in-lb; upper bracket #8-32 screws 18 in-lb (after sliding bracket to engage the toothed section with the steel flange under the breaker); strap-to-vertical-bus 65 in-lb	A	S401 p.1 step 4; p.3 steps 6-7; oem_spec
OEM instruction document	DEH062 R02 (09/2001)	A	S401 p.1, p.4; oem_spec
Identification features	Kit includes a B-phase isolator whose flaps fold up into the grooves of the TEY housing between phases; straps installed starting with the pole farthest from the 2.75 in dimension, carriage bolt head opposite the 2.75 in side	A	S401 pp.1,3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00105 AMCB6EYFP — GE — branch-connector-kit — STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)

OEM part number	AMCB6EYFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6EY (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference

Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S143 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT TEY W/FILLER" (UPC 783175335961)	A	S426 empower page AMCB6EYFP; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S401 DEH062; oem_spec
Breaker compatibility	TEY	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
	empower specification "Box/Front Height 3.375 in"	A	S426 empower page AMCB6EYFP; oem_spec
Torque values	Lower mounting brackets thread-forming screws 35 in-lb; breaker captive terminal screws into threaded strap holes 35 in-lb; upper bracket #8-32 screws 18 in-lb (after sliding bracket to engage the toothed section with the steel flange under the breaker); strap-to-vertical-bus 65 in-lb	B	S401 DEH062 pp.1-3; inference
OEM instruction document	DEH-062 (TEY)	A	S143 p.11-52; oem_spec
	Strap portion per DEH062 R02 (kit AMCB6EY); FP adds cover kit AFP3EYD	B	S401, S426 DEH062 p.1; inference
Aftermarket / reproduction	Breaker King offers BAMCB6EYGE (kit # SEY1K) as a replacement ('Kit SEY1K; Replaces OEM AMCB6EYFP'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00106	AMCB6FBFP	GE	branch-connector-kit	SUPERSEDED - ABB EMPOW

Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P dual)

OEM part number	AMCB6FBFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S143 p.11-43; oem_spec
	empower: "REPLACED BY AMCB6FB + AFP3FBD" (UPC 783164334135)	A	S426 empower page AMCB6FBFP; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Status	superseded - ABB empower description reads "REPLACED BY AMCB6FB + AFP3FBD"	A	S426 empower page AMCB6FBFP; oem_spec
Replacement / successor	empower (ABB) lists AMCB6FBFP as "REPLACED BY AMCB6FB + AFP3FBD"	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	hole pattern, OEM instruction document, Material, strap dimensions		

EDH-GEA-00107	AMCB6FDBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FCL, 3P dual)

OEM part number	AMCB6FDBFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FDB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S143 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00115	AMCB6FGBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P dual)

OEM part number	AMCB6FGBFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FGB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S143 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00399	AMCB6FJ	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB6FJ (SF/TF, DEH059)

OEM part number	AMCB6FJ	A	S398 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for double-branch mounting in APNB interiors	A	same as above
	empower: "BOLT-ON STRAP KIT SF DB" (UPC 783175333813)	A	S426 empower page AMCB6FJ; oem_spec
Application	double branch	A	S398 p.2 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S398 DEH059 pp.1-2; oem_spec
Breaker compatibility	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3SFD, AFP3TFS, AFP3TFD ("TF, and TH" as printed (TFJ/TFK/THFK family))	A	S398 p.1; oem_spec
Poles	3	A	S398 p.1; p.2 Table 3; oem_spec
Kit contents	Double-branch (Table 2): 18 A&C pole outer strap (2); 19 A&C pole inner strap (2); 20 carriage bolt 1/4-20 x 1.50 [x 1.00 for vertical bus <=600 A] (3); 21 1/4 in Belleville washer (3); 22 1/4-20 nut (3); 23 B pole strap (2); 24 breaker mounting bracket (2); 25 thread-forming screw (4); 26 1/4-20 x 3/4 in machine screw (6); 27 1/4 in Belleville washer (6); 28 #10-32 x 3-3/4 in machine screw (4); 29 #10 flat washer (4); 30 antiturn clip (3)	A	S398 p.1 Table 2; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips (clip pin into small hole in strap; bolt in front square hole of vertical bus), 1/4 in Belleville washers and nuts; UL-recognized 105 C thermoplastic tape (OANZ2, Permacel P-30-105 or 3M 66R) on unused strap contact surfaces; overlap > 1/2 each turn; minimum 0.028 in = two complete layers of overlapping turns	A	S398 pp.1-2; oem_spec
Torque values	Double-branch: brackets thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in 30 in-lb; line terminals 1/4-20 x 3/4 in 50 in-lb; strap-to-vertical-bus 65 in-lb	A	S398 p.2 steps 2-4; oem_spec
OEM instruction document	DEH059 R02 (09/2001) Installation Instructions; replacement hardware kit AHKBF1	A	S398 p.1, p.6; oem_spec
Identification features	Double-branch kit uses back-to-back outer and inner A&C straps and two B straps	A	S398 p.1 step 1a/1b; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AHKBF1 (EDH-GEA-00195)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00110	AMCB6FJFP	GE	branch-connector-kit	SUPERSEDED - ABB EMPOW

Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)

OEM part number	AMCB6FJFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S143 p.11-43; oem_spec
	empower: "REPLACED BY AMCB6FJ + AFP3SFD" (UPC 783175335893)	A	S426 empower page AMCB6FJFP; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S398 DEH059; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in	A	same as above
	empower specification "Box/Front Height 3.375 in"	A	S426 empower page AMCB6FJFP; oem_spec
Torque values	Double-branch: brackets thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in 30 in-lb; line terminals 1/4-20 x 3/4 in 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S398 DEH059 p.2; inference

OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S143 p.11-52; inference
	Strap portion installs per DEH059 R02 (kit AMCB6FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S398, S426 DEH059 p.1; inference
Status	superseded - ABB empower description reads "REPLACED BY AMCB6FJ + AFP3SFD"	A	S426 empower page AMCB6FJFP; oem_spec
Replacement / successor	empower (ABB) lists AMCB6FJFP as "REPLACED BY AMCB6FJ + AFP3SFD"	A	same as above
	ABB Tmax XT retrofit kit SRFB6XT4FPX (or SRFB6XT4FPK with Kirk lock provision) for Tmax XT4, 250 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served (retrofit replaces breaker and mounting hardware together; not a like-for-like strap kit)	A	S427 guide p.28 retrofit table; oem_spec
Aftermarket / reproduction	Breaker King offers BAMCB6FJGE (kit # SFD1K) as a replacement ('Kit SFD1K; Replaces OEM AMCB6FJFP'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, strap dimensions		

EDH-GEA-00112 AMCB6FJFPTF GE branch-connector-kit STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P dual)

OEM part number	AMCB6FJFPTF	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S143 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT TF DB W/FILLER" (UPC 783175335909)	A	S426 empower page AMCB6FJFPTF; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S398 DEH059; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 36-44 in	A	same as above
Torque values	Double-branch: brackets thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in 30 in-lb; line terminals 1/4-20 x 3/4 in 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S398 DEH059 p.2; inference
OEM instruction document	Strap portion installs per DEH059 R02 (kit AMCB6FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S398, S426 DEH059 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00406 AMCB6GB GE / ABB lineage branch-connector-kit STATUS UNKNOWN

Spectra bolt-on G-frame double-branch strap kit AMCB6GB (DEH40129)

OEM part number	AMCB6GB	A	S402 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for double-branch G-frame breakers in APNB interiors	A	same as above
	empower: "BOLT-ON STRAP KIT SG DB" (UPC 783175333837)	A	S426 empower page AMCB6GB; oem_spec
Application	double branch	A	S402 p.1; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S402 DEH40129; oem_spec
Breaker compatibility	SGH, SGL, SGP; breaker cover kit AFP4SGD	A	S402 p.1; oem_spec
Poles	3	A	S402 pp.2-4; oem_spec

Kit contents	Table 1 (Qty AMCB4GB / AMCB6GB): 1 192A6976P189 thread-forming screw #10-32 x 7/16 in 4/4; 2 252B3575P1 circuit breaker mounting bracket 2/2; 3 208C2291P1 filler center 2/2; 4 252B3613P1 antiturn clip 2/3; 5 252B3618G10 G frame double strap 2/2; 6 252B3618G11 G frame double strap 1/1; 7 75A105503P101 conical spring washer 1/4 in 4/4; 8 75A105503P105 conical spring washer 5/16 in 4/6; 9 DEH40129 instructions 1/1; 10 N22P23012B6 hex-head bolt 5/16-18 x 3/4 in 4/6; 11 N245P21B6 nut 1/4-20 2/3; 12 N37P21969B6 machine screw 1/4-20 x 3-3/4 in 4/4; 13 N402P11B6 flat washer 1/4 in 4/4; 14 N657P21024B6 carriage bolt 1/4-20 x 1-1/2 in 2/3; 15 N730BP1308B6 thread-forming screw #6 x 1/2 in 4/4	A	S402 p.1 Table 1; oem_spec
Dimensions	Vertical space required 5.50 in (4X)	A	S402 p.1; oem_spec
Fasteners	Unused branch: strap contact blocks covered with two layers of UL-recognized 105 C thermoplastic tape (OANZ2, e.g. Permacel P-30-105 or 3M 66R), min 0.013 in	A	S402 p.5 step 10; oem_spec
Torque values	Breaker mounting brackets thread-forming screws 30 in-lb; breakers to brackets (1/4-20 x 3-3/4 in screws + flat washers) 18 in-lb; line terminals to strap contact blocks (5/16-18 x 3/4 in hex bolts + 5/16 conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	A	S402 pp.4-5 steps 6-9; oem_spec
OEM instruction document	DEH40129 R03 (09/2001)	A	S402 p.1, p.6; oem_spec
Identification features	G-frame double straps carry threaded strap contact blocks on which the breaker line terminals rest; terminal cover installed over centre of assembly	A	S402 pp.4-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	252B3618G10 (EDH-GEA-00419), 252B3618G11 (EDH-GEA-00420), 252B3575P1 (EDH-GEA-00414), 208C2291P1 (EDH-GEA-00423)		
Not yet documented	Finish / plating, Material		

EDH-GEA-00116 AMCB6GBFP GE branch-connector-kit SUPERSEDED - ABB EMPOW

Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)

OEM part number	AMCB6GBFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6GB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S143 p.11-43; oem_spec
	empower: "BOLT-ON REPLCE BY AMCB6GB + AFP4SGD" (UPC 783175335930)	A	S426 empower page AMCB6GBFP; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S402 DEH40129; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in	A	same as above
	empower specification "Box/Front Height 4.375 in"	A	S426 empower page AMCB6GBFP; oem_spec
Torque values	Breaker mounting brackets thread-forming screws 30 in-lb; breakers to brackets (1/4-20 x 3-3/4 in screws + flat washers) 18 in-lb; line terminals to strap contact blocks (5/16-18 x 3/4 in hex bolts + 5/16 conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	B	S402 DEH40129 pp.4-5; inference
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S143 p.11-52; oem_spec
	Strap portion per DEH40129 R03 (kit AMCB6GB); FP adds filler kit AFP4SGD	B	S402, S426 DEH40129 p.1; inference
Status	superseded - ABB empower description reads "REPLCE BY AMCB6GB + AFP4SGD"	A	S426 empower page AMCB6GBFP; oem_spec
Replacement / successor	empower (ABB) lists AMCB6GBFP as "REPLCE BY AMCB6GB + AFP4SGD"	A	same as above
	ABB Tmax XT retrofit kit SRFB6XT5BFPX (or SRFB6XT5BFPK with Kirk lock provision) for Tmax XT5, 600 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served (retrofit replaces breaker and mounting hardware together; not a like-for-like strap kit)	A	S427 guide p.28 retrofit table; oem_spec

Aftermarket / reproduction	Breaker King offers BAMCB6GBGE (kit # SGD1K) as a replacement ('Kit SGD1K; Replaces OEM AMCB6GBFP'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, strap dimensions		

EDH-GEA-00108 AMCB6QDFP GE branch-connector-kit STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)

OEM part number	AMCB6QDFP	A	S143 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6QD (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S143 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S143 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S143 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S143, S154 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TQD, THQD	A	S143 p.11-43; oem_spec
Poles	3	A	same as above
Kit contents	A&C pole outer strap; A&C pole inner strap; carriage bolt 1/4-20; conical spring washer; nut 1/4-20; B pole strap; inner mounting bracket; thread-forming screw; outer mounting bracket; screw 1/4-20; conical spring washer; screw #10-32 x 2-x/x in; lock washer #10; antiturn clip (quantities not legible in mirror)	A	S154 DEH065 Table 1; oem_spec
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	S143 p.11-43; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips, conical spring washers and nuts; unused strap surfaces insulated with UL 105 C tape (min 0.013 in)	A	S154 DEH065 steps 3, 6; oem_spec
Torque values	Bracket thread-forming screws 35 in-lb; breaker-to-bracket #10-32 screws 35 in-lb; line terminal to strap 1/4-20 screws 50 in-lb	A	S154 DEH065 steps 4-5; oem_spec
OEM instruction document	DEH065 (Spectra Series Power Panelboards Bolt-On Circuit Breaker Kits AMCB6QD/AMCB4QD)	A	S154, S143 DEH065 p.1; BuyLog p.11-52; oem_spec
Aftermarket / reproduction	Breaker King offers BAMCB6QDGE (kit # SQD1K) as a replacement ('Kit SQD1K; Replaces OEM AMCB6QDFP'), labelled 'GE/ABB Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S627 distributor
Identification features	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole	A	S154 DEH065 step 2-3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP3QDD (EDH-GEA-00133)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-OTH-00048	BAMCB35KMGE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BAMCB35KMGE (seller cross-ref to GEA AMCB3KMFP)

OEM part number	BAMCB35KMGE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	AMCB3KMFP [equivalent] (seller cross-reference: 'Kit SKS1K; Replaces OEM AMCB35KMFP (sic; OEM catalog number is AMCB3KMFP)')	C	same as above
	SKS1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bolt-on hardware for GE APNB panelboards; mounts one SK frame breaker (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one SK frame breaker (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM AMCB3KMFP ('Kit SKS1K; Replaces OEM AMCB35KMFP (sic; OEM catalog number is AMCB3KMFP)') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00046	BAMCB3FJGE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BAMCB3FJGE (seller cross-ref to GEA AMCB3FJFP)

OEM part number	BAMCB3FJGE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	AMCB3FJFP [equivalent] (seller cross-reference: 'Kit SFS1K; Replaces OEM AMCB3FJFP')	C	same as above
	SFS1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bolt-on hardware for GE APNB panelboards; mounts one SF frame breaker (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one SF frame breaker (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM AMCB3FJFP ('Kit SFS1K; Replaces OEM AMCB3FJFP') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00047	BAMCB3GMGE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BAMCB3GMGE (seller cross-ref to GEA AMCB3GMFP)

OEM part number	BAMCB3GMGE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	AMCB3GMFP [equivalent] (seller cross-reference: 'Kit SGS1K; Replaces OEM AMCB3GMFP')	C	same as above
	SGS1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bolt-on hardware for GE APNB panelboards; mounts one SG frame breaker (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one SG frame breaker (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM AMCB3GMFP ('Kit SGS1K; Replaces OEM AMCB3GMFP') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00049	BAMCB6EBGE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BAMCB6EBGE (seller cross-ref to GEA AMCB6EBFP)

OEM part number	BAMCB6EBGE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	AMCB6EBFP [equivalent] (seller cross-reference: 'Kit SED1K; Replaces OEM AMCB6EBFP')	C	same as above
	SED1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bolt-on hardware for GE APNB panelboards; mounts two TED or SE frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two TED or SE frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM AMCB6EBFP ('Kit SED1K; Replaces OEM AMCB6EBFP') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00050	BAMCB6EYGE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BAMCB6EYGE (seller cross-ref to GEA AMCB6EYFP)

OEM part number	BAMCB6EYGE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	AMCB6EYFP [equivalent] (seller cross-reference: 'Kit SEY1K; Replaces OEM AMCB6EYFP')	C	same as above
	SEY1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bolt-on hardware for GE APNB panelboards; mounts two TEY frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two TEY frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM AMCB6EYFP ('Kit SEY1K; Replaces OEM AMCB6EYFP') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00052	BAMCB6FJGE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BAMCB6FJGE (seller cross-ref to GEA AMCB6FJFP)

OEM part number	BAMCB6FJGE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	AMCB6FJFP [equivalent] (seller cross-reference: 'Kit SFD1K; Replaces OEM AMCB6FJFP')	C	same as above
	SFD1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bolt-on hardware for GE APNB panelboards; mounts two SF frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two SF frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM AMCB6FJFP ('Kit SFD1K; Replaces OEM AMCB6FJFP') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00053	BAMCB6GBGE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BAMCB6GBGE (seller cross-ref to GEA AMCB6GBFP)

OEM part number	BAMCB6GBGE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	AMCB6GBFP [equivalent] (seller cross-reference: 'Kit SGD1K; Replaces OEM AMCB6GBFP')	C	same as above
	SGD1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bolt-on hardware for GE APNB panelboards; mounts two SG frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two SG frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM AMCB6GBFP ('Kit SGD1K; Replaces OEM AMCB6GBFP') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00051	BAMCB6QDGE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BAMCB6QDGE (seller cross-ref to GEA AMCB6QDFP)

OEM part number	BAMCB6QDGE (Breaker King catalog/model number)	C	S627 distributor
Alternate / superseded numbers	AMCB6QDFP [equivalent] (seller cross-reference: 'Kit SQD1K; Replaces OEM AMCB6QDFP')	C	same as above
	SQD1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bolt-on hardware for GE APNB panelboards; mounts two TQD frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two TQD frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'GE/ABB Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM AMCB6QDFP ('Kit SQD1K; Replaces OEM AMCB6QDFP') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00181	**AMC2FGMFP**	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single branch or main)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00179	**AMC2FJFP**	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branch or main)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00178	**AMC2FJFPTF**	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branch or main)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00184	**AMC2FLSFP**	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00182	**AMC2GMFP**	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00180	**AMC2JKFP**	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single branch or main)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00183	**AMC2KMFP**	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single branch or main)	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in) **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00162	**AMC3FGMFP**	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single branch or main)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00160	**AMC3FJFP**	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branch or main)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00159	**AMC3FJFPTF**	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branch or main)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00165	**AMC3FLSFP**	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00163	**AMC3GMFP**	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)	SGDA, SGHA, SGLA, SGPA **A**	superseded - ABB empower description reads "REPLACED BY AMC3
EDH-GEA-00161	**AMC3JKFP**	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single branch or main)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00164	**AMC3KMFP**	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single branch or main)	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in) **A**	unknown
EDH-GEA-00167	**AMC4EBFP**	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	TEB, TED **A**	unknown
EDH-GEA-00176	**AMC4EBSFP**	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00166	**AMC4FDBFP**	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00175	**AMC4FDSFP**	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00173	**AMC4FGBFP**	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double branch)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00171	**AMC4FJFP**	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00170	**AMC4FJFPTF**	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branch)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00177	**AMC4FLSFP**	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00174	**AMC4GBFP**	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double branch)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00172	**AMC4JKFP**	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double branch)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00169	**AMC4QDFP**	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	TQD, THQD **A**	unknown
EDH-GEA-00168	**AMC4SEFP**	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED; double branch)	SEDA, SEHA, SELA, SEPA, THED **A**	unknown
EDH-GEA-00149	**AMC6EBFP**	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SELA, SEPA; double branch)	TEB, TED, THED, SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00157	**AMC6EBSFP**	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00487	**AMC6EL**	Spectra plug-in breaker module AMC6EL (TEL)	TEL (only with a breaker of like type) **A**	unknown
EDH-GEA-00146	**AMC6EYFP**	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	TEY **A**	superseded - ABB empower description reads "REPLACED BY AMC6
EDH-GEA-00147	**AMC6FBFP**	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double branch)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00148	**AMC6FDBFP**	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)	FCS, FCV, FCN, FCH, FCL **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00156	**AMC6FDSPF**	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00154	**AMC6FGBFP**	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double branch)	FGL, FGN, FGH, FGP **A**	unknown
EDH-GEA-00152	**AMC6FJFP**	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00151	**AMC6FJFPTF**	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branch)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00158	**AMC6FLSFP**	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00155	**AMC6GBFP**	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double branch)	SGDA, SGHA, SGLA, SGPA (SGDA 400 A max) **A**	unknown
EDH-GEA-00153	**AMC6JKFP**	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double branch)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00145	**AMC6QBFP**	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	THQB, THHQB **A**	unknown
EDH-GEA-00150	**AMC6QDFP**	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	TQD, THQD **A**	unknown

EDH-GEA-00181	**AMC2FGMFP**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single branch or main)

OEM part number	AMC2FGMFP	**A**	S143, S649 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FGM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	**B**	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4FGS	**A**	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	**A**	same as above
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - single branch, 2-pole table	**A**	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 2-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	**A**	S155 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	**A**	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	FGV, FGN, FGH or FGP, max 600 A; 4X height; box width range 27"-44" in	**A**	S649 p.4; oem_spec
Current rating	600 A max breaker	**A**	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGS); breaker not included	**A**	S143 p.11-40 product features; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP4FGS	**A**	S649 p.4; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	**A**	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGS (EDH-GEA-00141)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00179	AMC2FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branch or main)

OEM part number	AMC2FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S143, S649 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FJFP1 (as printed with footnote 1 fused (footnote 1 text: not reproduced in brochure text))	A	S649 alias; p.4; oem_spec
	AMC2FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 250 A, includes filler plate kit AFP3SFS	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	empower: "MCCB MOUNTING MODULE 2PL W/FILLER" (UPC 783164239751)	A	S426 empower page AMC2FJFP; oem_spec
Application	Single branch or main	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - single branch, 2-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 2-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S411 GEH5626 p.1; oem_spec
	SFHA, SFLA or SFPA, max 250 A; 3X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	250 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S411 GEH5626 pp.1-3; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP3SFS	A	S649 p.4; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S411 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S411 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3SFS (EDH-GEA-00139)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00178	AMC2FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branch or main)

OEM part number	AMC2FJFPTF	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 225 A, includes filler plate kit AFP3TFS	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S411 GEH5626 p.1; oem_spec
Current rating	225 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S411 GEH5626 pp.1-3; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S411 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S411 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3TFS (EDH-GEA-00140)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00184 AMC2FLSFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)

OEM part number	AMC2FLSFP	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main adjacent to switch, max 250 A, includes filler plate kit AFP4SFS	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S411 GEH5626 p.1; oem_spec

Current rating	250 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S411 GEH5626 pp.1-3; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S411 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S411 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00182	AMC2GMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)

OEM part number	AMC2GMFP	A	S143, S649 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2GM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4SGS	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239683)	A	S426 empower page AMC2GMFP; oem_spec
Application	Single branch or main	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - single branch, 2-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 2-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S143, S155 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	SGDA, SGHA, SGLA or SGPA, max 600 A; 4X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	600 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kit AFP4SGS	A	S155 GEH5674 pp.1-2; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP4SGS	A	S649 p.4; oem_spec

Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Bus clip screws 27-32 in-lb; hex-head screws with Belleville washers 90-110 in-lb (stud-post side); round-head screws with flat washers 40-50 in-lb; latch screws 25 in-lb	A	S155 GEH5674 steps 1-3; oem_spec
	Breaker to stud posts (hex-head screws + Belleville washers) 90-110 in-lb; round-head screws + flat washers 40-50 in-lb; bus clip screws 27-32 in-lb; latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S155 GEH5674 pp.1-2; oem_spec
OEM instruction document	GEH5674 (2-pole) / GEH-5673 (3-pole) SGDA/SGHA/SGLA/SGPA modules	A	S155, S143 GEH5674 p.1; BuyLog p.11-52; oem_spec
	GEH5674 R03 (Circuit Breakers and Modules)	A	S155 p.1; oem_spec
Identification features	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices)	A	S155 GEH5674 figs 1-5; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGS (EDH-GEA-00142)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00180 AMC2JKFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single branch or main)

OEM part number	AMC2JKFP	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 400/600 A, includes filler plate kit AFP6TJS	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TJK, TJD, TJJ, THJK (combinable); TJ4V, THJ4V, TJL4V (combinable)	A	S414 GEH5624 p.1; oem_spec
Current rating	400/600 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits AFP6TJS (AMC2JK, AMC3JK) and AFP6TJD (AMC4JK, AMC6JK); double-mounted breakers joined by straps across opposing line terminals; single breaker on double module uses spacers on unused stud posts	A	S414 GEH5624 pp.1-3; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker load end round-head screws + lock washers 35-50 in-lb; stud-post nut-washer assemblies 80-110 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S414 GEH5624 pp.1-3; oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5624 R03 (Circuit Breakers and Modules)	A	S414 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00183	AMC2KMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single branch or main)

OEM part number	AMC2KMFP	A	S143, S649 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2KM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 1200 A, includes filler plate kit AFP6SKS	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - single branch, 2-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 2-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in)	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TKM, THKM, TK4V, TKL4V, SKHA, SKLA, SKPA	A	S412 GEH5623 p.1; oem_spec
	SKHA or SKLA (40-44 in); SKPA (44 in), max 1200 A; 6X height; box width range 40"-44" in	A	S649 p.4; oem_spec
Current rating	1200 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6SKS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kit AFP6SKS; type SKPA adjacent to an ADS switch requires 1X (1-3/8 in) space closed with APP1W filler; SKPA branch requires large top cover per GEH-5592	A	S412 GEH5623 pp.1-3; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP6SKS	A	S649 p.4; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Main TKM/THKM, TK4V/TKL4V and SKHA/SKLA/SKPA: screws 35-50 in-lb, contact-block nuts and strap bolts 200-250 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S412 GEH5623 pp.1-3; oem_spec
OEM instruction document	GEH-5623 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5623 R04 (Circuit Breakers and Modules)	A	S412 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Requires	AFP6SKS (EDH-GEA-00144)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00162	AMC3FGMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single branch or main)

OEM part number	AMC3FGMFP	A	S143, S649 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FGM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4FGS	A	S143 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - single branch, 3-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S143 p.11-40 (3-pole table); oem_spec
	FGV, FGN, FGH or FGP, max 600 A; 4X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	600 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP4FGS	A	S649 p.4; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGS (EDH-GEA-00141)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00160	AMC3FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branch or main)

OEM part number	AMC3FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S143, S649 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FJFP1 (as printed with footnote 1 fused (footnote 1 text: not reproduced in brochure text))	A	S649 alias; p.4; oem_spec
	AMC3FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 250 A, includes filler plate kit AFP3SFS	A	S143 p.11-40 (3-pole table); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239768)	A	S426 empower page AMC3FJFP; oem_spec
Application	Single branch or main	A	S143 p.11-40 (3-pole table); oem_spec
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - single branch, 3-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S143 p.11-40 (3-pole table); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S411 GEH5626 p.1; oem_spec

	SFHA, SFLA or SFPA, max 250 A; 3X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	250 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S411 GEH5626 pp.1-3; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP3SFS	A	S649 p.4; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S411 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S411 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3SFS (EDH-GEA-00139)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00159	**AMC3FJFPTF**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branch or main)

OEM part number	AMC3FJFPTF	A	S143 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 225 A, includes filler plate kit AFP3TFS	A	S143 p.11-40 (3-pole table); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783175334575)	A	S426 empower page AMC3FJFPTF; oem_spec
Application	Single branch or main	A	S143 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S143 p.11-40 (3-pole table); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S411 GEH5626 p.1; oem_spec
Current rating	225 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S411 GEH5626 pp.1-3; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (3-pole table); oem_spec

Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S411 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S411 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3TFS (EDH-GEA-00140)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00165 AMC3FLSFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)

OEM part number	AMC3FLSFP	A	S143 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main adjacent to switch, max 250 A, includes filler plate kit AFP4SFS	A	S143 p.11-40 (3-pole table); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239553)	A	S426 empower page AMC3FLSFP; oem_spec
Application	Single branch or main adjacent to switch	A	S143 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S143 p.11-40 (3-pole table); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S411 GEH5626 p.1; oem_spec
Current rating	250 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S411 GEH5626 pp.1-3; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S411 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S411 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00163 AMC3GMFP GE breaker-mounting-kit SUPERSEDED - ABB EMPOW

Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)

OEM part number	AMC3GMFP	A	S143, S649 p.11-40 (3-pole table); oem_spec

Alternate / superseded numbers	AMC3GM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4SGS	A	S143 p.11-40 (3-pole table); oem_spec
	empower: "REPLACED BY AMC3GM + AFP4SGS" (UPC 783164239676)	A	S426 empower page AMC3GMFP; oem_spec
Application	Single branch or main	A	S143 p.11-40 (3-pole table); oem_spec
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - single branch, 3-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S143, S155 p.11-40 (3-pole table); oem_spec
	SGDA, SGHA, SGLA or SGPA, max 600 A; 4X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	600 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kit AFP4SGS	A	S155 GEH5674 pp.1-2; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP4SGS	A	S649 p.4; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Bus clip screws 27-32 in-lb; hex-head screws with Belleville washers 90-110 in-lb (stud-post side); round-head screws with flat washers 40-50 in-lb; latch screws 25 in-lb	A	S155 GEH5674 steps 1-3; oem_spec
	Breaker to stud posts (hex-head screws + Belleville washers) 90-110 in-lb; round-head screws + flat washers 40-50 in-lb; bus clip screws 27-32 in-lb; latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S155 GEH5674 pp.1-2; oem_spec
OEM instruction document	GEH5674 (2-pole) / GEH-5673 (3-pole) SGDA/SGHA/SGLA/SGPA modules	A	S155, S143 GEH5674 p.1; BuyLog p.11-52; oem_spec
	GEH5674 R03 (Circuit Breakers and Modules)	A	S155 p.1; oem_spec
Status	superseded - ABB empower description reads "REPLACED BY AMC3GM + AFP4SGS"	A	S426 empower page AMC3GMFP; oem_spec
Replacement / successor	empower (ABB) lists AMC3GMFP as "REPLACED BY AMC3GM + AFP4SGS"	A	same as above
Identification features	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices)	A	S155 GEH5674 figs 1-5; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGS (EDH-GEA-00142)		
Not yet documented	bus clip/connector part numbers, Material		

EDH-GEA-00161 AMC3JKFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single branch or main)

OEM part number	AMC3JKFP	A	S143 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 400/600 A, includes filler plate kit AFP6TJS	A	S143 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above

Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S143 p.11-40 (3-pole table); oem_spec
	TJK, TJD, TJJ, THJK (combinable); TJ4V, THJ4V, TJL4V (combinable)	A	S414 GEH5624 p.1; oem_spec
Current rating	400/600 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits AFP6TJS (AMC2JK, AMC3JK) and AFP6TJD (AMC4JK, AMC6JK); double-mounted breakers joined by straps across opposing line terminals; single breaker on double module uses spacers on unused stud posts	A	S414 GEH5624 pp.1-3; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Breaker load end round-head screws + lock washers 35-50 in-lb; stud-post nut-washer assemblies 80-110 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S414 GEH5624 pp.1-3; oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5624 R03 (Circuit Breakers and Modules)	A	S414 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00164	AMC3KMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single branch or main)

OEM part number	AMC3KMFP	A	S143, S649 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3KM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 1200 A, includes filler plate kit AFP6SKS	A	S143 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - single branch, 3-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in)	A	S143 p.11-40 (3-pole table); oem_spec
	TKM, THKM, TK4V, TKL4V, SKHA, SKLA, SKPA	A	S412 GEH5623 p.1; oem_spec
	SKHA or SKLA (40-44 in); SKPA (44 in), max 1200 A; 6X height; box width range 40"-44" in	A	S649 p.4; oem_spec
Current rating	1200 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6SKS); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kit AFP6SKS; type SKPA adjacent to an ADS switch requires 1X (1-3/8 in) space closed with APP1W filler; SKPA branch requires large top cover per GEH-5592	A	S412 GEH5623 pp.1-3; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP6SKS	A	S649 p.4; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S143 p.11-40 (3-pole table); oem_spec

Torque values	Main TKM/THKM, TK4V/TKL4V and SKHA/SKLA/SKPA: screws 35-50 in-lb, contact-block nuts and strap bolts 200-250 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S412 GEH5623 pp.1-3; oem_spec
OEM instruction document	GEH-5623 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5623 R04 (Circuit Breakers and Modules)	A	S412 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Requires	AFP6SKS (EDH-GEA-00144)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00167	**AMC4EBFP**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)

OEM part number	AMC4EBFP	A	S143, S649 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4EB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 150 A, includes filler plate kit AFP2TED	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239614)	A	S426 empower page AMC4EBFP; oem_spec
Application	Double branch	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 2-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 2-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TEB, TED	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TEB, TED, THED, SEDA, SEHA, SELA, SEPA combinable; TEL only with like type	A	S417 GEH5625 p.1; oem_spec
	TEB or TED, max 150 A; 3X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	150 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP2TED); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SED (AMC6EB, AMC4SE); AFP2TED (AMC4EB); AFP4SED (AMC6EBS, AMC4EBS); AFP3ELD (AMC6EL)	A	S417 GEH5625 pp.1-2; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP2TED	A	S649 p.4; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to module: #10-32 screw-washer assemblies 27-32 in-lb, #8-32 screws with cup washers 15-20 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb; no space between units (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S417 GEH5625 pp.1-2; oem_spec

OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5625 R04 (Circuit Breakers and Modules)	A	S417 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AFP2TED (EDH-GEA-00129)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00176	**AMC4EBSFP**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)

OEM part number	AMC4EBSFP	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4EBS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 150 A, includes filler plate kit AFP4SED	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TEB, TED, THED, SEDA, SEHA, SELA, SEPA combinable; TEL only with like type	A	S417 GEH5625 p.1; oem_spec
Current rating	150 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SED); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SED (AMC6EB, AMC4SE); AFP2TED (AMC4EB); AFP4SED (AMC6EBS, AMC4EBS); AFP3ELD (AMC6EL)	A	S417 GEH5625 pp.1-2; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to module: #10-32 screw-washer assemblies 27-32 in-lb, #8-32 screws with cup washers 15-20 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb; no space between units (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S417 GEH5625 pp.1-2; oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5625 R04 (Circuit Breakers and Modules)	A	S417 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00166	AMC4FDBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)

OEM part number	AMC4FDBFP	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FDB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 100 A, includes filler plate kit AFP3FDD	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FDD); breaker not included	A	S143 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00175	AMC4FDSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)

OEM part number	AMC4FDSFP	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FDS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 100 A, includes filler plate kit AFP4FDD	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FDD); breaker not included	A	S143 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00173	AMC4FGBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double branch)

OEM part number	AMC4FGBFP	A	S143, S649 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FGB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 600 A, includes filler plate kit AFP4FGD	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 2-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 2-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	FGV, FGN, FGH or FGP, max 600 A; 4X height; box width range 40"-44" in	A	S649 p.4; oem_spec
Current rating	600 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP4FGD	A	S649 p.4; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGD (EDH-GEA-00137)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00171	AMC4FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branch)

OEM part number	AMC4FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S143, S649 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FJFP1 (as printed with footnote 1 fused (footnote 1 text: not reproduced in brochure text))	A	S649 alias; p.4; oem_spec
	AMC4FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 250 A, includes filler plate kit AFP3SFD	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239737)	A	S426 empower page AMC4FJFP; oem_spec
Application	Double branch	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 2-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 2-pole"; oem_spec

Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S411 GEH5626 p.1; oem_spec
	SFHA, SFLA or SFPA, max 250 A; 3X height; box width range 31"-44" in	A	S649 p.4; oem_spec
Current rating	250 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S411 GEH5626 pp.1-3; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP3SFD	A	S649 p.4; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S411 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S411 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3SFD (EDH-GEA-00135)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00170	**AMC4FJFPTF**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branch)

OEM part number	AMC4FJFPTF	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 225 A, includes filler plate kit AFP3TFD	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S411 GEH5626 p.1; oem_spec
Current rating	225 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFD); breaker not included	A	S143 p.11-40 product features; oem_spec

	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S411 GEH5626 pp.1-3; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S411 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S411 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3TFD (EDH-GEA-00136)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00177	**AMC4FLSFP**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)

OEM part number	AMC4FLSFP	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 250 A, includes filler plate kit AFP4SFD	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164254365)	A	S426 empower page AMC4FLSFP; oem_spec
Application	Double branch adjacent to switch	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S411 GEH5626 p.1; oem_spec
Current rating	250 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S411 GEH5626 pp.1-3; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S411 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec

	GEH5626 R04 (Circuit Breakers and Modules)	A	S411 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00174	AMC4GBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double branch)

OEM part number	AMC4GBFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S143, S649 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4GBFP2 (as printed with footnote 2 fused (footnote 2 text: "SGDA circuit breaker rated 400 amps maximum"))	A	S649 alias; p.4; oem_spec
	AMC4GB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 600 A, includes filler plate kit AFP4SGD	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239669)	A	S426 empower page AMC4GBFP; oem_spec
Application	Double branch	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 2-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 2-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S143, S413 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	SGDA, SGHA, SGLA or SGPA (SGDA 400 A max), max 600 A; 4X height; box width range 40"-44" in	A	S649 p.4; oem_spec
Current rating	600 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kit AFP4SGC (as printed in GEH5673; BuyLog lists AFP4SGD for dual SG - possible misprint)	A	S413 GEH5673 pp.1-3; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP4SGD	A	S649 p.4; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Line-end #10-32 inserts and screws into breaker ON-side holes 20-25 in-lb; breaker line straps to stud posts (hex-head screws + Belleville washers) 90-110 in-lb; OFF side to mounting brackets (round-head SEMS + flat washers) 40-50 in-lb; center barrier thread-cutting screws 10 in-lb; bus clip slotted hex SEMS screws 27-32 in-lb; latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S413 GEH5673 pp.1-3; oem_spec
OEM instruction document	GEH5673 R03 (Circuit Breakers and Modules)	A	S413 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGD (EDH-GEA-00138)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00172	AMC4JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double branch)

OEM part number	AMC4JKFP	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 400/600 A, includes filler plate kit AFP6TJD	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TJK, TJD, TJJ, THJK (combinable); TJ4V, THJ4V, TJL4V (combinable)	A	S414 GEH5624 p.1; oem_spec
Current rating	400/600 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits AFP6TJS (AMC2JK, AMC3JK) and AFP6TJD (AMC4JK, AMC6JK); double-mounted breakers joined by straps across opposing line terminals; single breaker on double module uses spacers on unused stud posts	A	S414 GEH5624 pp.1-3; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker load end round-head screws + lock washers 35-50 in-lb; stud-post nut-washer assemblies 80-110 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S414 GEH5624 pp.1-3; oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5624 R03 (Circuit Breakers and Modules)	A	S414 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00169	**AMC4QDFP**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)

OEM part number	AMC4QDFP	A	S143, S649 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4QD (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 225 A, includes filler plate kit AFP2QDD	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 2-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 2-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TQD, THQD	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec

	TQD, THQD (any combination)	A	S416 GEH5643 p.1; oem_spec
	TQD or THQD, max 225 A; 2X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	225 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP2QDD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits AFP3QDD (AMC6QD), AFP2QDD (AMC4QD)	A	S416 GEH5643 pp.1-2; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP2QDD	A	S649 p.4; oem_spec
Dimensions	2X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to module: 1/4-20 screws 40-50 in-lb, #10-32 screws 25-30 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S416 GEH5643 pp.1-2; oem_spec
OEM instruction document	GEH-5643 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5643 R03 (Circuit Breakers and Modules)	A	S416 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: TQD / THQD		
Requires	AFP2QDD (EDH-GEA-00128)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00168 AMC4SEFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED; double branch)

OEM part number	AMC4SEFP	A	S143, S649 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4SE (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 150 A, includes filler plate kit AFP3SED	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 2-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 2-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA, THED	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TEB, TED, THED, SEDA, SEHA, SELA, SEPA combinable; TEL only with like type	A	S417 GEH5625 p.1; oem_spec
	SEDA, SEHA, SELA, SEPA or THED, max 150 A; 3X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	150 A max breaker	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SED); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SED (AMC6EB, AMC4SE); AFP2TED (AMC4EB); AFP4SED (AMC6EBS, AMC4EBS); AFP3ELD (AMC6EL)	A	S417 GEH5625 pp.1-2; oem_spec

	Complete kit (module with filler plate kit); filler-plate-only kit is AFP3SED	A	S649 p.4; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to module: #10-32 screw-washer assemblies 27-32 in-lb, #8-32 screws with cup washers 15-20 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb; no space between units (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S417 GEH5625 pp.1-2; oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5625 R04 (Circuit Breakers and Modules)	A	S417 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AFP3SED (EDH-GEA-00134)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00149 AMC6EBFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SELA, SEPA; double branch)

OEM part number	AMC6EBFP	A	S143, S649 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 150 A, includes filler plate kit AFP3SED	A	S143 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 3-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TEB, TED, THED, SEDA, SEHA, SELA, SEPA	A	S143 p.11-40 (3-pole table); oem_spec
	TEB, TED, THED, SEDA, SEHA, SELA, SEPA combinable; TEL only with like type	A	S417 GEH5625 p.1; oem_spec
	TEB, TED, THED, SEDA, SEHA, SELA or SEPA, max 150 A; 3X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	150 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SED); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SED (AMC6EB, AMC4SE); AFP2TED (AMC4EB); AFP4SED (AMC6EBS, AMC4EBS); AFP3ELD (AMC6EL)	A	S417 GEH5625 pp.1-2; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP3SED	A	S649 p.4; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to module: #10-32 screw-washer assemblies 27-32 in-lb, #8-32 screws with cup washers 15-20 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb; no space between units (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S417 GEH5625 pp.1-2; oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5625 R04 (Circuit Breakers and Modules)	A	S417 p.1; oem_spec

Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AFP3SED (EDH-GEA-00134)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00157	**AMC6EBSFP**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)

OEM part number	AMC6EBSFP	A	S143 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EBS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 150 A, includes filler plate kit AFP4SED	A	S143 p.11-40 (3-pole table); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239638)	A	S426 empower page AMC6EBSFP; oem_spec
Application	Double branch adjacent to switch	A	S143 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	S143 p.11-40 (3-pole table); oem_spec
	TEB, TED, THED, SEDA, SEHA, SELA, SEPA combinable; TEL only with like type	A	S417 GEH5625 p.1; oem_spec
Current rating	150 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SED); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SED (AMC6EB, AMC4SE); AFP2TED (AMC4EB); AFP4SED (AMC6EBS, AMC4EBS); AFP3ELD (AMC6EL)	A	S417 GEH5625 pp.1-2; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to module: #10-32 screw-washer assemblies 27-32 in-lb, #8-32 screws with cup washers 15-20 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb; no space between units (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S417 GEH5625 pp.1-2; oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5625 R04 (Circuit Breakers and Modules)	A	S417 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00487	AMC6EL	GE / ABB lineage	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker module AMC6EL (TEL)

OEM part number	AMC6EL	A	S417 GEH5625 p.1; oem_spec
Description	Spectra plug-in circuit breaker module for TEL breakers (double branch, 3-pole) (listed as a catalog number covered by GEH5625; TEL may be used only with a breaker of like type)	B	S417 GEH5625 p.1; inference
Breaker compatibility	TEL (only with a breaker of like type)	A	S417 p.2; oem_spec
Kit contents	Filler plate kit AFP3ELD	A	S417 p.2 Table 1; oem_spec
Torque values	#10-32 screw-washer assemblies 27-32 in-lb; #8-32 screws with cup washers 15-20 in-lb; rail latch screws 25 in-lb	A	S417 pp.1-2; oem_spec
OEM instruction document	GEH5625 R04	A	S417 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	FP variant number, Status		

EDH-GEA-00146	AMC6EYFP	GE	breaker-mounting-kit	SUPERSEDED - ABB EMPOW

Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)

OEM part number	AMC6EYFP	A	S143, S649 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EY (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3EYD	A	S143 p.11-40 (3-pole table); oem_spec
	empower: "REPLACED BY AMC6EY + AFP3EYD" (UPC 783164239713)	A	S426 empower page AMC6EYFP; oem_spec
Application	Double branch	A	S143 p.11-40 (3-pole table); oem_spec
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 3-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TEY	A	S143 p.11-40 (3-pole table); oem_spec
	TEY (AMC6EY); THQB, THHQB (AMC6QB)	A	S415 GEH5677 p.1; oem_spec
	TEY, max 100 A; 3X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	100 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3EYD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3EYD for AMC6EY; AFP3QBD for AMC6QB	A	S415 GEH5677 p.1; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP3EYD	A	S649 p.4; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; breaker line-end captive screws 25 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S415 GEH5677 p.1; oem_spec
OEM instruction document	GEH-5677 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5677 R03 (Circuit Breakers and Modules)	A	S415 p.1; oem_spec

Status	superseded - ABB empower description reads "REPLACED BY AMC6EY + AFP3EYD"	A	S426 empower page AMC6EYFP; oem_spec
Replacement / successor	empower (ABB) lists AMC6EYFP as "REPLACED BY AMC6EY + AFP3EYD"	A	same as above
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BAMC6EYGE ('Kit # AMC6EYFP; APN plug-on, 1 or 2 TEY frame'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S627 distributor
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Requires	AFP3EYD (EDH-GEA-00130)		
Not yet documented	bus clip/connector part numbers, Material		

EDH-GEA-00147	**AMC6FBFP**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double branch)

OEM part number	AMC6FBFP	A	S143, S649 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3FBD	A	S143 p.11-40 (3-pole table); oem_spec
	empower: "FB MODULE 3 POLE W/ COVERS" (UPC 783164334074)	A	S426 empower page AMC6FBFP; oem_spec
Application	Double branch	A	S143 p.11-40 (3-pole table); oem_spec
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 3-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S143 p.11-40 (3-pole table); oem_spec
	FBV, FBN, FBH or FBL, max 100 A; 3X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	100 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FBD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP3FBD	A	S649 p.4; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Requires	AFP3FBD (EDH-GEA-00132)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00148	AMC6FDBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)

OEM part number	AMC6FDBFP	A	S143 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FDB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3FDD	A	S143 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S143 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FDD); breaker not included	A	S143 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00156	AMC6FDSPF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)

OEM part number	AMC6FDSPF	A	S143 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FDSPF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 100 A, includes filler plate kit AFP4FDD	A	S143 p.11-40 (3-pole table); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S143 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FDD); breaker not included	A	S143 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S143 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00154	AMC6FGBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double branch)

OEM part number	AMC6FGBFP	A	S143, S649 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FGB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 600 A, includes filler plate kit AFP4FGD	A	S143 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 3-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	FGL, FGN, FGH, FGP	A	S143 p.11-40 (3-pole table); oem_spec
	FGL, FGN, FGH or FGP, max 600 A; 4X height; box width range 40"-44" in	A	S649 p.4; oem_spec
Current rating	600 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP4FGD	A	S649 p.4; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S143 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGD (EDH-GEA-00137)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00152	AMC6FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branch)

OEM part number	AMC6FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S143, S649 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FJFP1 (as printed with footnote 1 fused (footnote 1 text: not reproduced in brochure text))	A	S649 alias; p.4; oem_spec
	AMC6FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 250 A, includes filler plate kit AFP3SFD	A	S143 p.11-40 (3-pole table); oem_spec
	empower: "CONSISTS OF AMC6FJ + AFP3SFD" (UPC 783164239744)	A	S426 empower page AMC6FJFP; oem_spec
Application	Double branch	A	S143 p.11-40 (3-pole table); oem_spec
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 3-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S143 p.11-40 (3-pole table); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S411 GEH5626 p.1; oem_spec

	SFHA, SFLA or SFPA, max 250 A; 3X height; box width range 31"-44" in	A	S649 p.4; oem_spec
Current rating	250 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S411 GEH5626 pp.1-3; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP3SFD	A	S649 p.4; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S143 p.11-40 (3-pole table); oem_spec
	empower specification "Box/Front Height 3.375 in"	A	S426 empower page AMC6FJFP; oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S411 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S411 p.1; oem_spec
Replacement / successor	empower (ABB) lists AMC6FJFP as "CONSISTS OF AMC6FJ + AFP3SFD"	A	S426 empower page AMC6FJFP; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3SFD (EDH-GEA-00135)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00151 AMC6FJFPTF GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branch)

OEM part number	AMC6FJFPTF	A	S143 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 225 A, includes filler plate kit AFP3TFD	A	S143 p.11-40 (3-pole table); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783175334568)	A	S426 empower page AMC6FJFPTF; oem_spec
Application	Double branch	A	S143 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S143 p.11-40 (3-pole table); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S411 GEH5626 p.1; oem_spec
Current rating	225 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S411 GEH5626 pp.1-3; oem_spec

Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S411 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S411 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3TFD (EDH-GEA-00136)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00158 AMC6FLSFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)

OEM part number	AMC6FLSFP	A	S143 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 250 A, includes filler plate kit AFP4SFD	A	S143 p.11-40 (3-pole table); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239522)	A	S426 empower page AMC6FLSFP; oem_spec
Application	Double branch adjacent to switch	A	S143 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S143 p.11-40 (3-pole table); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S411 GEH5626 p.1; oem_spec
Current rating	250 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S411 GEH5626 pp.1-3; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S411 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S411 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00155 AMC6GBFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double branch)

OEM part number	AMC6GBFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S143, S649 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6GBFP2 (as printed with footnote 2 fused (footnote 2 text: "SGDA circuit breaker rated 400 amps maximum"))	A	S649 alias; p.4; oem_spec
	AMC6GB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 600 A, includes filler plate kit AFP4SGD	A	S143 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 3-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA (SGDA 400 A max)	A	S143 p.11-40 (3-pole table); oem_spec
	SGDA, SGHA, SGLA, SGPA	A	S413 GEH5673 p.1; oem_spec
	SGDA, SGHA, SGLA or SGPA (SGDA 400 A max), max 600 A; 4X height; box width range 40"-44" in	A	S649 p.4; oem_spec
Current rating	600 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kit AFP4SGC (as printed in GEH5673; BuyLog lists AFP4SGD for dual SG - possible misprint)	A	S413 GEH5673 pp.1-3; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP4SGD	A	S649 p.4; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Line-end #10-32 inserts and screws into breaker ON-side holes 20-25 in-lb; breaker line straps to stud posts (hex-head screws + Belleville washers) 90-110 in-lb; OFF side to mounting brackets (round-head SEMS + flat washers) 40-50 in-lb; center barrier thread-cutting screws 10 in-lb; bus clip slotted hex SEMS screws 27-32 in-lb; latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S413 GEH5673 pp.1-3; oem_spec
OEM instruction document	GEH5673 R03 (Circuit Breakers and Modules)	A	S413 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGD (EDH-GEA-00138)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00153	**AMC6JKFP**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double branch)

OEM part number	AMC6JKFP	A	S143 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 400/600 A, includes filler plate kit AFP6TJD	A	S143 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S143 p.11-40 (3-pole table); oem_spec
	TJK, TJD, TJJ, THJK (combinable); TJ4V, THJ4V, TJL4V (combinable)	A	S414 GEH5624 p.1; oem_spec

Current rating	400/600 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits AFP6TJS (AMC2JK, AMC3JK) and AFP6TJD (AMC4JK, AMC6JK); double-mounted breakers joined by straps across opposing line terminals; single breaker on double module uses spacers on unused stud posts	A	S414 GEH5624 pp.1-3; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Breaker load end round-head screws + lock washers 35-50 in-lb; stud-post nut-washer assemblies 80-110 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S414 GEH5624 pp.1-3; oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5624 R03 (Circuit Breakers and Modules)	A	S414 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00145 AMC6QBFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)

OEM part number	AMC6QBFP	A	S143, S649 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6QB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3QBD	A	S143 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 3-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	THQB, THHQB	A	S143 p.11-40 (3-pole table); oem_spec
	TEY (AMC6EY); THQB, THHQB (AMC6QB)	A	S415 GEH5677 p.1; oem_spec
	THQB or THHQB, max 100 A; 3X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	100 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3QBD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits: AFP3EYD for AMC6EY; AFP3QBD for AMC6QB	A	S415 GEH5677 p.1; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP3QBD	A	S649 p.4; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; breaker line-end captive screws 25 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S415 GEH5677 p.1; oem_spec
OEM instruction document	GEH-5677 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5677 R03 (Circuit Breakers and Modules)	A	S415 p.1; oem_spec

Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BAMC6QBGE ('OEM # AMC6QBFP; obsolete APN plug-on module, up to 6 poles THQB/THHQB'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S627 distributor
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00150	AMC6QDFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)

OEM part number	AMC6QDFP	A	S143, S649 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6QD (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S143 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 225 A, includes filler plate kit AFP3QDD	A	S143 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
	Branch device mounting in Spectra Series plug-in switchboard distribution sections (Pro-Stock program) - double branch, 3-pole table	A	S649 p.4 "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole"; oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S155 GEH5674 step 3; oem_spec
Breaker compatibility	TQD, THQD	A	S143 p.11-40 (3-pole table); oem_spec
	TQD, THQD (any combination)	A	S416 GEH5643 p.1; oem_spec
	TQD or THQD, max 225 A; 3X height; box width range 27"-44" in	A	S649 p.4; oem_spec
Current rating	225 A max breaker	A	S143 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3QDD); breaker not included	A	S143 p.11-40 product features; oem_spec
	Filler kits AFP3QDD (AMC6QD), AFP2QDD (AMC4QD)	A	S416 GEH5643 pp.1-2; oem_spec
	Complete kit (module with filler plate kit); filler-plate-only kit is AFP3QDD	A	S649 p.4; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S143 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to module: 1/4-20 screws 40-50 in-lb, #10-32 screws 25-30 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S416 GEH5643 pp.1-2; oem_spec
OEM instruction document	GEH-5643 (Circuit Breaker Mounting Instructions (Modules))	A	S143 p.11-52; oem_spec
	GEH5643 R03 (Circuit Breakers and Modules)	A	S416 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: TQD / THQD		
Requires	AFP3QDD (EDH-GEA-00133)		
Not yet documented	bus clip/connector part numbers, Material, Status		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00419	**252B3618G10**	GE G frame double strap (bolt-on, double-branch) - 252B3618G10	—	unknown
EDH-GEA-00420	**252B3618G11**	GE G frame double strap (bolt-on, double-branch) - 252B3618G11	—	unknown
EDH-GEA-00416	**252B3618G13**	GE G frame single strap (bolt-on) - 252B3618G13	—	unknown
EDH-GEA-00417	**252B3618G14**	GE G frame single strap (bolt-on) - 252B3618G14	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00418	**252B3618G15**	GE G frame single strap (bolt-on) - 252B3618G15	—	unknown

EDH-GEA-00419	252B3618G10	GE / ABB lineage	connector-strap	STATUS UNKNOWN

GE G frame double strap (bolt-on, double-branch) - 252B3618G10

OEM part number	252B3618G10	A	S402 DEH40129 p.1 Table 1; oem_spec
Description	G frame double strap (bolt-on, double-branch)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB4GB and AMCB6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00420	252B3618G11	GE / ABB lineage	connector-strap	STATUS UNKNOWN

GE G frame double strap (bolt-on, double-branch) - 252B3618G11

OEM part number	252B3618G11	A	S402 DEH40129 p.1 Table 1; oem_spec
Description	G frame double strap (bolt-on, double-branch)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB4GB and AMCB6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00416	252B3618G13	GE / ABB lineage	connector-strap	STATUS UNKNOWN

GE G frame single strap (bolt-on) - 252B3618G13

OEM part number	252B3618G13	A	S399 DEH060 p.1 Table 1; oem_spec
Description	G frame single strap (bolt-on)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB2GM and AMCB3GM	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00417	252B3618G14	GE / ABB lineage	connector-strap	STATUS UNKNOWN

GE G frame single strap (bolt-on) - 252B3618G14

OEM part number	252B3618G14	A	S399 DEH060 p.1 Table 1; oem_spec
Description	G frame single strap (bolt-on)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB2GM and AMCB3GM	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00418	252B3618G15	GE / ABB lineage	connector-strap	STATUS UNKNOWN

GE G frame single strap (bolt-on) - 252B3618G15

OEM part number	252B3618G15	A	S399 DEH060 p.1 Table 1; oem_spec
Description	G frame single strap (bolt-on)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB2GM and AMCB3GM	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00235	**ANK120D**	Spectra neutral kit ANK120D	—	unknown
EDH-GEA-00234	**ANK800D**	Spectra neutral kit ANK800D	—	unknown
EDH-GEA-00233	**ANKN120**	Spectra neutral kit ANKN120	—	unknown
EDH-GEA-00232	**ANKN400**	Spectra neutral kit ANKN400	—	unknown

EDH-GEA-00235 ANK120D — GE — neutral-assembly — STATUS UNKNOWN

Spectra neutral kit ANK120D

OEM part number	ANK120D	A	S143 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit plug-in, 1200 A dual main: 8 main #2-500kcmil, 8 x #14-2/0, 10 x #6-300kcmil, 4 x #2-500kcmil; includes mechanical lugs and bonding strap	A	S143 p.11-45; oem_spec
Current rating	1200 A	A	same as above
Torque values	Neutral on 1/4-20 enclosure studs (flat washer, lock washer, nut) 27-32 in-lb; opposite end two 10-32 x 11/16 thread-forming screws 27-32 in-lb; bond strap under wire connector nuts 200-250 in-lb and 10-32 x 3/8 SEMS screw to enclosure 27-32 in-lb; ground-fault sensor/connector strap 3/8-16 nuts 14 ft-lb (GEH5585 covers "Type ANK neutrals (Model 2)"; applicability to each ANK catalog number inferred from the ANK prefix)	B	S420 GEH5585 p.1; oem_spec
OEM instruction document	GEH5585 R05 (04/2001) Type ANK Neutrals (Model 2)	B	S420 p.1; inference
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00234 ANK800D — GE — neutral-assembly — STATUS UNKNOWN

Spectra neutral kit ANK800D

OEM part number	ANK800D	A	S143 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit plug-in, 800 A dual main: 8 main #2-500kcmil, 8 x #14-2/0, 10 x #6-300kcmil, 4 x #2-500kcmil; includes mechanical lugs and bonding strap	A	S143 p.11-45; oem_spec
Current rating	800 A	A	same as above
Torque values	Neutral on 1/4-20 enclosure studs (flat washer, lock washer, nut) 27-32 in-lb; opposite end two 10-32 x 11/16 thread-forming screws 27-32 in-lb; bond strap under wire connector nuts 200-250 in-lb and 10-32 x 3/8 SEMS screw to enclosure 27-32 in-lb; ground-fault sensor/connector strap 3/8-16 nuts 14 ft-lb (GEH5585 covers "Type ANK neutrals (Model 2)"; applicability to each ANK catalog number inferred from the ANK prefix)	B	S420 GEH5585 p.1; oem_spec
OEM instruction document	GEH5585 R05 (04/2001) Type ANK Neutrals (Model 2)	B	S420 p.1; inference
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00233 ANKN120 — GE — neutral-assembly — STATUS UNKNOWN

Spectra neutral kit ANKN120

OEM part number	ANKN120	A	S143 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit bolt-on, 600/800/1200 A, single/dual: 8 main #2-600kcmil, 9 x #14-2/0, 10 x #6-300kcmil, 10 x #14-#4; includes mechanical lugs and bonding strap	A	S143 p.11-45; oem_spec
	empower: "NEUT 4D/6/6D/8/1200A" (UPC 783175328376)	A	S426 empower page ANKN120; oem_spec
Current rating	600-1200 A	A	S143 p.11-45; oem_spec
Torque values	Neutral on 1/4-20 enclosure studs (flat washer, lock washer, nut) 27-32 in-lb; opposite end two 10-32 x 11/16 thread-forming screws 27-32 in-lb; bond strap under wire connector nuts 200-250 in-lb and 10-32 x 3/8 SEMS screw to enclosure 27-32 in-lb; ground-fault sensor/connector strap 3/8-16 nuts 14 ft-lb (GEH5585 covers "Type ANK neutrals (Model 2)"; applicability to each ANK catalog number inferred from the ANK prefix)	B	S420 GEH5585 p.1; oem_spec
OEM instruction document	GEH5585 R05 (04/2001) Type ANK Neutrals (Model 2)	B	S420 p.1; inference
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00232	ANKN400	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANKN400

OEM part number	ANKN400	A	S143 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit bolt-on, 250/400 A, single/dual main: 2 main lugs #2-600kcmil, 16 x #14-2/0, 5 x #6-300kcmil, 24 x #14-#4; includes mechanical lugs and bonding strap	A	S143 p.11-45; oem_spec
	empower: "NEUTRAL KIT" (UPC 783175230136)	A	S426 empower page ANKN400; oem_spec
Current rating	250/400 A	A	S143 p.11-45; oem_spec
Torque values	Neutral on 1/4-20 enclosure studs (flat washer, lock washer, nut) 27-32 in-lb; opposite end two 10-32 x 11/16 thread-forming screws 27-32 in-lb; bond strap under wire connector nuts 200-250 in-lb and 10-32 x 3/8 SEMS screw to enclosure 27-32 in-lb; ground-fault sensor/connector strap 3/8-16 nuts 14 ft-lb (GEH5585 covers "Type ANK neutrals (Model 2)"; applicability to each ANK catalog number inferred from the ANK prefix)	B	S420 GEH5585 p.1; oem_spec
OEM instruction document	GEH5585 R05 (04/2001) Type ANK Neutrals (Model 2)	B	S420 p.1; inference
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00236	**AEG10**	Spectra equipment ground kit AEG10	—	unknown
EDH-GEA-00237	**AEG21**	Spectra equipment ground kit AEG21	—	unknown
EDH-GEA-00238	**AEG21S**	Spectra equipment ground kit AEG21S	—	unknown
EDH-GEA-00239	**AEG31S**	Spectra equipment ground kit AEG31S	—	unknown
EDH-GEA-00240	**AEG47**	Spectra equipment ground kit AEG47	—	unknown
EDH-GEA-00241	**AEG47S**	Spectra equipment ground kit AEG47S	—	unknown

EDH-GEA-00236	AEG10	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG10

OEM part number	AEG10	A	S143 p.11-45; oem_spec
Description	Equipment ground kit, bonded, 10 circuits, 10 wires #6-2/0 Cu/Al (cartons of 10)	A	same as above
	AEG10/AEG21 uninsulated; AEG21S/AEG31S insulated equipment grounds	A	S421 p.1; oem_spec
	empower: "GROUND KIT 10 WIRE BONDED" (UPC 783175227945)	A	S426 empower page AEG10; oem_spec
Torque values	Equipment ground mounted at end of box opposite LINE stamp with two 10-32 thread-forming screws, 25-30 in-lb (scratch paint at strap contact)	A	S421 GEH5586 p.1; oem_spec
OEM instruction document	GEH5586 R02 (04/2001)	A	S421 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00237	AEG21	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG21

OEM part number	AEG21	A	S143 p.11-45; oem_spec
Description	Equipment ground kit, bonded, 21 circuits, 9 wires	A	same as above
	AEG10/AEG21 uninsulated; AEG21S/AEG31S insulated equipment grounds	A	S421 p.1; oem_spec
	empower: "GROUND KIT 21 WIRE BONDED" (UPC 783175227952)	A	S426 empower page AEG21; oem_spec
Torque values	Equipment ground mounted at end of box opposite LINE stamp with two 10-32 thread-forming screws, 25-30 in-lb (scratch paint at strap contact)	A	S421 GEH5586 p.1; oem_spec
OEM instruction document	GEH5586 R02 (04/2001)	A	S421 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00238	AEG21S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG21S

OEM part number	AEG21S	A	S143 p.11-45; oem_spec
Description	Equipment ground kit, insulated/isolated, 21 circuits	A	same as above
	AEG10/AEG21 uninsulated; AEG21S/AEG31S insulated equipment grounds	A	S421 p.1; oem_spec
Torque values	Equipment ground mounted at end of box opposite LINE stamp with two 10-32 thread-forming screws, 25-30 in-lb (scratch paint at strap contact)	A	S421 GEH5586 p.1; oem_spec
OEM instruction document	GEH5586 R02 (04/2001)	A	S421 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00239	AEG31S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG31S

OEM part number	AEG31S	A	S143 p.11-45; oem_spec
Description	Equipment ground kit, insulated/isolated, 31 circuits, 10 wires #6-2/0	A	same as above
	AEG10/AEG21 uninsulated; AEG21S/AEG31S insulated equipment grounds	A	S421 p.1; oem_spec
Torque values	Equipment ground mounted at end of box opposite LINE stamp with two 10-32 thread-forming screws, 25-30 in-lb (scratch paint at strap contact)	A	S421 GEH5586 p.1; oem_spec
OEM instruction document	GEH5586 R02 (04/2001)	A	S421 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00240	AEG47	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG47

OEM part number	AEG47	A	S157 DEH212; oem_spec
Description	Equipment ground, bonded for Spectra Series panelboards	A	same as above
Installation location	Box back, positioned as required	A	S157 DEH212 step 1; oem_spec
Fasteners	Four #10-32 self-tapping screws in field-drilled 0.173 in holes in box back (no mounting holes provided)	A	same as above
Torque values	#10-32 mounting screws 32 in-lb	A	S157 DEH212 step 2; oem_spec
OEM instruction document	DEH212 R02	A	S157 oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, number of terminals, Status		

EDH-GEA-00241	AEG47S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG47S

OEM part number	AEG47S	A	S157 DEH212; oem_spec
Description	Equipment ground, isolated for Spectra Series panelboards	A	same as above
Installation location	Box back, positioned as required	A	S157 DEH212 step 1; oem_spec
Fasteners	Four #10-32 self-tapping screws in field-drilled 0.173 in holes in box back (no mounting holes provided)	A	same as above
Torque values	#10-32 mounting screws 32 in-lb	A	S157 DEH212 step 2; oem_spec
OEM instruction document	DEH212 R02	A	S157 oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, number of terminals, Status		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00440	**208C1850P3**	Spectra breaker cover support 208C1850P3	—	unknown
EDH-GEA-00441	**208C1850P4**	Spectra breaker cover support 208C1850P4	—	unknown
EDH-GEA-00442	**208C1850P5**	Spectra breaker cover support 208C1850P5	—	unknown
EDH-GEA-00443	**208C1850P6**	Spectra breaker cover support 208C1850P6	—	unknown
EDH-GEA-00414	**252B3575P1**	GE Circuit breaker mounting bracket, G-frame bolt-on double-branch - 252B3575P1	—	unknown
EDH-GEA-00413	**252B3576P1**	GE Circuit breaker mounting bracket, G-frame bolt-on main/single-branch - 252B3576P1	—	unknown

EDH-GEA-00440	208C1850P3	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

Spectra breaker cover support 208C1850P3

OEM part number	208C1850P3	A	S406, S405, S156 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Description	Spectra circuit breaker cover support (snaps onto breaker mounting bracket / module via slots; four flexible prongs carry the push-on breaker cover)	A	S406, S405, S397 DEH042 p.1-2; DEH044 p.1; DEH047 p.1; oem_spec
Application	4-1/8 in (3X) and 5-1/2 in (4X) cover height: 36 & 40 in panelboard / 40 in switchboard and 44 in panelboard / 45 in switchboard; also used for SFHA/SFLA/SFPA/TFL/TFJ/TFK/THFK single-branch mountings in all widths (DEH042 footnote); 3X cover support in AMCB6TEDL (qty 2); DEH044: 4-1/8 in (3X) for 36-45 in widths	A	S406, S405, S156 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Installation location	On bolt-on breaker mounting brackets (uppermost or lowest slot per kit instructions) or on plug-in AMC module	A	S406 DEH042 p.1 step 2; oem_spec
Identification features	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off	A	S397, S398 DEH047 p.1; DEH059 p.2; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material		

EDH-GEA-00441	208C1850P4	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

Spectra breaker cover support 208C1850P4

OEM part number	208C1850P4	A	S406, S405 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Description	Spectra circuit breaker cover support (snaps onto breaker mounting bracket / module via slots; four flexible prongs carry the push-on breaker cover)	A	S406, S405, S397 DEH042 p.1-2; DEH044 p.1; DEH047 p.1; oem_spec
Application	4-1/8 in (3X) and 5-1/2 in (4X) cover height: 27 & 31 in panelboard / 35 in switchboard (DEH042, DEH044)	A	S406, S405 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Installation location	On bolt-on breaker mounting brackets (uppermost or lowest slot per kit instructions) or on plug-in AMC module	A	S406 DEH042 p.1 step 2; oem_spec
Identification features	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off	A	S397, S398 DEH047 p.1; DEH059 p.2; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material		

EDH-GEA-00442	208C1850P5	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

Spectra breaker cover support 208C1850P5

OEM part number	208C1850P5	A	S406, S405 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Description	Spectra circuit breaker cover support (snaps onto breaker mounting bracket / module via slots; four flexible prongs carry the push-on breaker cover)	A	S406, S405, S397 DEH042 p.1-2; DEH044 p.1; DEH047 p.1; oem_spec
Application	2-3/4 in (2X) cover height: 36 & 40 in panelboard / 40 in switchboard and 44 in panelboard / 45 in switchboard	A	S406, S405 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Installation location	On bolt-on breaker mounting brackets (uppermost or lowest slot per kit instructions) or on plug-in AMC module	A	S406 DEH042 p.1 step 2; oem_spec
Identification features	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off	A	S397, S398 DEH047 p.1; DEH059 p.2; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material		

EDH-GEA-00443	208C1850P6	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

Spectra breaker cover support 208C1850P6

OEM part number	208C1850P6	A	S406, S405 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Description	Spectra circuit breaker cover support (snaps onto breaker mounting bracket / module via slots; four flexible prongs carry the push-on breaker cover)	A	S406, S405, S397 DEH042 p.1-2; DEH044 p.1; DEH047 p.1; oem_spec
Application	2-3/4 in (2X) cover height: 27 & 31 in panelboard / 35 in switchboard	A	S406, S405 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Installation location	On bolt-on breaker mounting brackets (uppermost or lowest slot per kit instructions) or on plug-in AMC module	A	S406 DEH042 p.1 step 2; oem_spec
Identification features	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off	A	S397, S398 DEH047 p.1; DEH059 p.2; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material		

EDH-GEA-00414	252B3575P1	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

GE Circuit breaker mounting bracket, G-frame bolt-on double-branch - 252B3575P1

OEM part number	252B3575P1	A	S402 DEH40129 p.1 Table 1; oem_spec
Description	Circuit breaker mounting bracket, G-frame bolt-on double-branch	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB4GB/AMCB6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00413	252B3576P1	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

GE Circuit breaker mounting bracket, G-frame bolt-on main/single-branch - 252B3576P1

OEM part number	252B3576P1	A	S399 DEH060 p.1 Table 1; oem_spec
Description	Circuit breaker mounting bracket, G-frame bolt-on main/single-branch	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB2GM/AMCB3GM	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

Standoff

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00544	**208C2022P1**	Spectra ADF dead-front mounting post 208C2022P1	—	unknown

EDH-GEA-00544	208C2022P1	GE / ABB lineage	standoff	STATUS UNKNOWN

Spectra ADF dead-front mounting post 208C2022P1

OEM part number	208C2022P1	A	S423 GEH5930 p.1 Table 1; oem_spec
Description	Dead-front mounting post (4 per ADF kit); fastened to interior end plates at outermost holes with 1/4-20 x 1/2 in hex-head screws, 50-60 in-lb; with main lugs only load-end posts used	A	S423 pp.1-2; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00411	**10083041P1**	GE Terminal cover, G-frame bolt-on (main/single-branch) - 10083041P1	—	unknown
EDH-GEA-00436	**252B1667P1**	GE Barrier center - 252B1667P1	—	unknown

EDH-GEA-00411	10083041P1	GE / ABB lineage	barrier	STATUS UNKNOWN

GE Terminal cover, G-frame bolt-on (main/single-branch) - 10083041P1

OEM part number	10083041P1	A	S399 DEH060 p.1 Table 1; oem_spec
Description	Terminal cover, G-frame bolt-on (main/single-branch)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB2GM/AMCB3GM	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00436	252B1667P1	GE / ABB lineage	barrier	STATUS UNKNOWN

GE Barrier center - 252B1667P1

OEM part number	252B1667P1	A	S156 p.1 Table 1; oem_spec
Description	Barrier center (riveted to TEDL filler)	A	same as above
Installation location	Spectra APNB bolt-on interior, TED6 breaker with TEDL current limiter, 3X (4.125 in) vertical space	A	S156 p.1; oem_spec
Kit contents	Qty 1 in circuit breaker cover kit AMCB6TEDL	A	S156 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Material		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00813	**10083889P19**	Spectra circuit breaker cover 10083889P19 for Record Plus FE frame (4 1/8 in high, 27 & 31 in panelboard)	Record Plus FE frame **A**	unknown
EDH-GEA-00814	**10083889P20**	Spectra circuit breaker cover 10083889P20 for Record Plus FE frame (4 1/8 in high, 36 & 40 in panelboard)	Record Plus FE frame **A**	unknown
EDH-GEA-00815	**10083889P21**	Spectra circuit breaker cover 10083889P21 for Record Plus FE frame (4 1/8 in high, 44 in panelboard)	Record Plus FE frame **A**	unknown
EDH-GEA-00816	**10083889P28**	Spectra circuit breaker cover 10083889P28 for Record Plus FE frame (5 1/2 in high, 27 & 31 in panelboard)	Record Plus FE frame **A**	unknown
EDH-GEA-00817	**10083889P29**	Spectra circuit breaker cover 10083889P29 for Record Plus FE frame (5 1/2 in high, 36 & 40 in panelboard)	Record Plus FE frame **A**	unknown
EDH-GEA-00818	**10083889P30**	Spectra circuit breaker cover 10083889P30 for Record Plus FE frame (5 1/2 in high, 44 in panelboard)	Record Plus FE frame **A**	unknown

EDH-GEA-00813	10083889P19	GE	deadfront	STATUS UNKNOWN

Spectra circuit breaker cover 10083889P19 for Record Plus FE frame (4 1/8 in high, 27 & 31 in panelboard)

OEM part number	10083889P19	A	S651 p.1 Table 1; oem_spec
Description	Circuit breaker cover (dead-front cover plate) for Record Plus type FE breaker frames in Spectra Series panelboards and switchboards; cover height 4 1/8 in (3X)	A	S651 p.1; oem_spec
Application	Panelboard/switchboard width: 27 & 31 in panelboard / 35 in switchboard	A	S651 p.1 Table 1; oem_spec
Installation location	Installed on the flexible cover supports on the breaker module	A	S651 p.1 step 4; oem_spec
Breaker compatibility	Record Plus FE frame	A	S651 p.1; oem_spec
Kit contents	Cover with center barrier attached by two push-in rivets (supplied) (instruction says rivets provided; whether barrier ships with each cover number is not stated)	B	S651 p.1 step 2; oem_spec
OEM instruction document	DEH41271 R01	A	S651 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FE 250		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00814	10083889P20	GE	deadfront	STATUS UNKNOWN

Spectra circuit breaker cover 10083889P20 for Record Plus FE frame (4 1/8 in high, 36 & 40 in panelboard)

OEM part number	10083889P20	A	S651 p.1 Table 1; oem_spec
Description	Circuit breaker cover (dead-front cover plate) for Record Plus type FE breaker frames in Spectra Series panelboards and switchboards; cover height 4 1/8 in (3X)	A	S651 p.1; oem_spec
Application	Panelboard/switchboard width: 36 & 40 in panelboard / 40 in switchboard	A	S651 p.1 Table 1; oem_spec
Installation location	Installed on the flexible cover supports on the breaker module	A	S651 p.1 step 4; oem_spec
Breaker compatibility	Record Plus FE frame	A	S651 p.1; oem_spec
Kit contents	Cover with center barrier attached by two push-in rivets (supplied) (instruction says rivets provided; whether barrier ships with each cover number is not stated)	B	S651 p.1 step 2; oem_spec
OEM instruction document	DEH41271 R01	A	S651 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FE 250		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00815	10083889P21	GE	deadfront	STATUS UNKNOWN

Spectra circuit breaker cover 10083889P21 for Record Plus FE frame (4 1/8 in high, 44 in panelboard)

OEM part number	10083889P21	A	S651 p.1 Table 1; oem_spec
Description	Circuit breaker cover (dead-front cover plate) for Record Plus type FE breaker frames in Spectra Series panelboards and switchboards; cover height 4 1/8 in (3X)	A	S651 p.1; oem_spec
Application	Panelboard/switchboard width: 44 in panelboard / 45 in switchboard	A	S651 p.1 Table 1; oem_spec
Installation location	Installed on the flexible cover supports on the breaker module	A	S651 p.1 step 4; oem_spec
Breaker compatibility	Record Plus FE frame	A	S651 p.1; oem_spec
Kit contents	Cover with center barrier attached by two push-in rivets (supplied) (instruction says rivets provided; whether barrier ships with each cover number is not stated)	B	S651 p.1 step 2; oem_spec
OEM instruction document	DEH41271 R01	A	S651 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FE 250		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00816	10083889P28	GE	deadfront	STATUS UNKNOWN

Spectra circuit breaker cover 10083889P28 for Record Plus FE frame (5 1/2 in high, 27 & 31 in panelboard)

OEM part number	10083889P28	A	S651 p.1 Table 1; oem_spec
Description	Circuit breaker cover (dead-front cover plate) for Record Plus type FE breaker frames in Spectra Series panelboards and switchboards; cover height 5 1/2 in (4X)	A	S651 p.1; oem_spec
Application	Panelboard/switchboard width: 27 & 31 in panelboard / 35 in switchboard	A	S651 p.1 Table 1; oem_spec
Installation location	Installed on the flexible cover supports on the breaker module	A	S651 p.1 step 4; oem_spec
Breaker compatibility	Record Plus FE frame	A	S651 p.1; oem_spec
Kit contents	Cover with center barrier attached by two push-in rivets (supplied) (instruction says rivets provided; whether barrier ships with each cover number is not stated)	B	S651 p.1 step 2; oem_spec
OEM instruction document	DEH41271 R01	A	S651 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FE 250		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00817	10083889P29	GE	deadfront	STATUS UNKNOWN

Spectra circuit breaker cover 10083889P29 for Record Plus FE frame (5 1/2 in high, 36 & 40 in panelboard)

OEM part number	10083889P29	A	S651 p.1 Table 1; oem_spec
Description	Circuit breaker cover (dead-front cover plate) for Record Plus type FE breaker frames in Spectra Series panelboards and switchboards; cover height 5 1/2 in (4X)	A	S651 p.1; oem_spec
Application	Panelboard/switchboard width: 36 & 40 in panelboard / 40 in switchboard	A	S651 p.1 Table 1; oem_spec
Installation location	Installed on the flexible cover supports on the breaker module	A	S651 p.1 step 4; oem_spec
Breaker compatibility	Record Plus FE frame	A	S651 p.1; oem_spec
Kit contents	Cover with center barrier attached by two push-in rivets (supplied) (instruction says rivets provided; whether barrier ships with each cover number is not stated)	B	S651 p.1 step 2; oem_spec
OEM instruction document	DEH41271 R01	A	S651 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FE 250		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00818	10083889P30	GE	deadfront	STATUS UNKNOWN

Spectra circuit breaker cover 10083889P30 for Record Plus FE frame (5 1/2 in high, 44 in panelboard)

OEM part number	10083889P30	A	S651 p.1 Table 1; oem_spec
Description	Circuit breaker cover (dead-front cover plate) for Record Plus type FE breaker frames in Spectra Series panelboards and switchboards; cover height 5 1/2 in (4X)	A	S651 p.1; oem_spec
Application	Panelboard/switchboard width: 44 in panelboard / 45 in switchboard	A	S651 p.1 Table 1; oem_spec
Installation location	Installed on the flexible cover supports on the breaker module	A	S651 p.1 step 4; oem_spec
Breaker compatibility	Record Plus FE frame	A	S651 p.1; oem_spec
Kit contents	Cover with center barrier attached by two push-in rivets (supplied) (instruction says rivets provided; whether barrier ships with each cover number is not stated)	B	S651 p.1 step 2; oem_spec
OEM instruction document	DEH41271 R01	A	S651 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FE 250		
Not yet documented	Dimensions, Finish / plating, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00819	**10096990P1**	Spectra space filler 10096990P1 for FE breaker cover	Record Plus FE frame covers 10083889P19-P30 A	unknown
EDH-GEA-00434	**168D1930P3**	GE Filler, TEDL double-branch 3X, for 36/40 in wide - 168D1930P3	—	unknown
EDH-GEA-00435	**168D1930P4**	GE Filler, TEDL double-branch 3X, for 44/45 in wide - 168D1930P4	—	unknown
EDH-GEA-00423	**208C2291P1**	GE Filler center, G-frame double-branch bolt-on - 208C2291P1	—	unknown
EDH-GEA-00465	**208C4262G1**	Spectra breaker cover 208C4262G1 (TFJ..., single-branch, (3X))	TFJ, TFK, THFK, TFL A	unknown
EDH-GEA-00476	**208C4262G10**	Spectra breaker cover 208C4262G10 (THQB..., double-branch, (4X))	THQB, THHQB A	unknown
EDH-GEA-00477	**208C4262G11**	Spectra breaker cover 208C4262G11 (THQB..., double-branch, (4X))	THQB, THHQB A	unknown
EDH-GEA-00478	**208C4262G12**	Spectra breaker cover 208C4262G12 (THQB..., double-branch, (4X))	THQB, THHQB A	unknown
EDH-GEA-00479	**208C4262G13**	Spectra breaker cover 208C4262G13 (TEY, double-branch, (4X))	TEY A	unknown
EDH-GEA-00480	**208C4262G14**	Spectra breaker cover 208C4262G14 (TEY, double-branch, (4X))	TEY A	unknown
EDH-GEA-00481	**208C4262G15**	Spectra breaker cover 208C4262G15 (TEY, double-branch, (4X))	TEY A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00482	**208C4262G16**	Spectra breaker cover 208C4262G16 (SGDA..., single-branch, (4X))	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00483	**208C4262G17**	Spectra breaker cover 208C4262G17 (SGDA..., single-branch, (4X))	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00484	**208C4262G18**	Spectra breaker cover 208C4262G18 (SGDA..., single-branch, (4X))	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00486	**208C4262G19**	Spectra breaker cover 208C4262G19 (SGDA..., double-branch, (4X))	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00466	**208C4262G2**	Spectra breaker cover 208C4262G2 (TFJ..., single-branch, (3X))	TFJ, TFK, THFK, TFL **A**	unknown
EDH-GEA-00470	**208C4262G20**	Spectra breaker cover 208C4262G20 (TQD..., double-branch, (2X))	TQD, THQD **A**	unknown
EDH-GEA-00471	**208C4262G21**	Spectra breaker cover 208C4262G21 (TQD..., double-branch, (2X))	TQD, THQD **A**	unknown
EDH-GEA-00472	**208C4262G22**	Spectra breaker cover 208C4262G22 (TQD..., double-branch, (2X))	TQD, THQD **A**	unknown
EDH-GEA-00473	**208C4262G23**	Spectra breaker cover 208C4262G23 (TQD..., double-branch, (3X))	TQD, THQD **A**	unknown
EDH-GEA-00474	**208C4262G24**	Spectra breaker cover 208C4262G24 (TQD..., double-branch, (3X))	TQD, THQD **A**	unknown
EDH-GEA-00475	**208C4262G25**	Spectra breaker cover 208C4262G25 (TQD..., double-branch, (3X))	TQD, THQD **A**	unknown
EDH-GEA-00459	**208C4262G26**	Spectra breaker cover 208C4262G26 (TEB..., double-branch, (2X))	TEB, TED, THED, TEL **A**	unknown
EDH-GEA-00460	**208C4262G27**	Spectra breaker cover 208C4262G27 (TEB..., double-branch, (2X))	TEB, TED, THED, TEL **A**	unknown
EDH-GEA-00461	**208C4262G28**	Spectra breaker cover 208C4262G28 (TEB..., double-branch, (2X))	TEB, TED, THED, TEL **A**	unknown
EDH-GEA-00462	**208C4262G29**	Spectra breaker cover 208C4262G29 (TEB..., double-branch, (3X))	TEB, TED, THED, TEL **A**	unknown
EDH-GEA-00467	**208C4262G3**	Spectra breaker cover 208C4262G3 (TFJ..., single-branch, (3X))	TFJ, TFK, THFK, TFL **A**	unknown
EDH-GEA-00463	**208C4262G30**	Spectra breaker cover 208C4262G30 (TEB..., double-branch, (3X))	TEB, TED, THED, TEL **A**	unknown
EDH-GEA-00464	**208C4262G31**	Spectra breaker cover 208C4262G31 (TEB..., double-branch, (3X))	TEB, TED, THED, TEL **A**	unknown
EDH-GEA-00444	**208C4262G32**	Spectra breaker cover 208C4262G32 (SEDA..., double-branch, (3X))	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00445	**208C4262G33**	Spectra breaker cover 208C4262G33 (SEDA..., double-branch, (3X))	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00446	**208C4262G34**	Spectra breaker cover 208C4262G34 (SEDA..., double-branch, (3X))	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00447	**208C4262G35**	Spectra breaker cover 208C4262G35 (SEDA..., double-branch, (4X))	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00448	**208C4262G36**	Spectra breaker cover 208C4262G36 (SEDA..., double-branch, (4X))	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00485	**208C4262G49**	Spectra breaker cover 208C4262G49 (SGDA..., double-branch, (4X))	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00449	**208C4262G53**	Spectra breaker cover 208C4262G53 (SFHA..., single-branch, (3X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00450	**208C4262G54**	Spectra breaker cover 208C4262G54 (SFHA..., single-branch, (3X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00451	**208C4262G55**	Spectra breaker cover 208C4262G55 (SFHA..., single-branch, (3X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00452	**208C4262G56**	Spectra breaker cover 208C4262G56 (SFHA..., single-branch, (4X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00453	**208C4262G57**	Spectra breaker cover 208C4262G57 (SFHA..., single-branch, (4X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00454	**208C4262G58**	Spectra breaker cover 208C4262G58 (SFHA..., double-branch, (3X))	SFHA, SFLA, SFPA **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00455	**208C4262G59**	Spectra breaker cover 208C4262G59 (SFHA..., double-branch, (3X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00468	**208C4262G6**	Spectra breaker cover 208C4262G6 (TFJ..., double-branch, (3X))	TFJ, TFK, THFK, TFL **A**	unknown
EDH-GEA-00456	**208C4262G60**	Spectra breaker cover 208C4262G60 (SFHA..., double-branch, (3X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00457	**208C4262G61**	Spectra breaker cover 208C4262G61 (SFHA..., double-branch, (4X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00458	**208C4262G62**	Spectra breaker cover 208C4262G62 (SFHA..., double-branch, (4X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00469	**208C4262G7**	Spectra breaker cover 208C4262G7 (TFJ..., double-branch, (3X))	TFJ, TFK, THFK, TFL **A**	unknown
EDH-GEA-00499	**252B1768G1**	GE End filler plate, K-frame, 44 in panelboard / 45 in switchboard - 252B1768G1	—	unknown
EDH-GEA-00500	**252B1768G2**	GE End filler plate, K-frame, 40 in panelboard or switchboard - 252B1768G2	—	unknown
EDH-GEA-00437	**252B2056P8**	GE Spacer plate TED6 with TEDL - 252B2056P8	—	unknown
EDH-GEA-00501	**AFP10T**	Spectra ADS switch filler plate AFP10T	—	unknown
EDH-GEA-00820	**AFP10T44**	Spectra filler kit AFP10T44 for 400-600 A J/T fused switch in 44 in enclosure	—	unknown
EDH-GEA-00502	**AFP10X**	Spectra ADS switch filler plate AFP10X	—	unknown
EDH-GEA-00503	**AFP19X**	Spectra ADS switch filler plate AFP19X	—	unknown
EDH-GEA-00131	**AFP2FBD**	Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00128	**AFP2QDD**	Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00129	**AFP2TED**	Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)	TEB, TED **A**	unknown
EDH-GEA-00490	**AFP3ELD**	Spectra breaker filler plate kit AFP3ELD	TEL **A**	unknown
EDH-GEA-00130	**AFP3EYD**	Spectra breaker filler plate kit AFP3EYD (TEY, dual)	TEY **A**	unknown
EDH-GEA-00132	**AFP3FBD**	Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00495	**AFP3QBD**	Spectra breaker filler plate kit AFP3QBD	THQB, THHQB **A**	unknown
EDH-GEA-00133	**AFP3QDD**	Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00134	**AFP3SED**	Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, dual)	TEB, TED, THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00135	**AFP3SFD**	Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00139	**AFP3SFS**	Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00489	**AFP3TED**	Spectra breaker filler plate kit AFP3TED	TEB, TED, THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00136	**AFP3TFD**	Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00140	**AFP3TFS**	Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00137	**AFP4FGD**	Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00141	**AFP4FGS**	Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00488	**AFP4SED**	Spectra breaker filler plate kit AFP4SED	SEDA, SEHA, SELA, SEPA / TEB, TED, THED **A**	unknown
EDH-GEA-00491	**AFP4SFD**	Spectra breaker filler plate kit AFP4SFD	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00492	**AFP4SFS**	Spectra breaker filler plate kit AFP4SFS	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00496	**AFP4SGC**	Spectra breaker filler plate kit AFP4SGC	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00138	**AFP4SGD**	Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)	SGH, SGL, SGP **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00142	**AFP4SGS**	Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00504	**AFP4X**	Spectra ADS switch filler plate AFP4X	—	unknown
EDH-GEA-00143	**AFP5LCS**	Spectra breaker filler plate kit AFP5LCS (SKP, single)	SKP **A**	unknown
EDH-GEA-00505	**AFP5X**	Spectra ADS switch filler plate AFP5X	—	unknown
EDH-GEA-00144	**AFP6SKS**	Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)	SKP, SKH, SKL, TKM, THKM **A**	unknown
EDH-GEA-00494	**AFP6TJD**	Spectra breaker filler plate kit AFP6TJD	TJK, TJD, TJJ, THJK, TJ4V, THJ4V, TJL4V **A**	unknown
EDH-GEA-00493	**AFP6TJS**	Spectra breaker filler plate kit AFP6TJS	TJK, TJD, TJJ, THJK, TJ4V, THJ4V, TJL4V **A**	unknown
EDH-GEA-00506	**AFP7T**	Spectra ADS switch filler plate AFP7T	—	unknown
EDH-GEA-00508	**AFP7X**	Spectra ADS switch filler plate AFP7X	—	unknown
EDH-GEA-00507	**AFP7X2**	Spectra ADS switch filler plate AFP7X2	—	unknown
EDH-GEA-00883	**AFPML4X**	Spectra main lug module cover plate AFPML4X	—	unknown
EDH-GEA-00884	**AFPML6X**	Spectra main lug module cover plate AFPML6X	—	unknown
EDH-GEA-00885	**AFPML6XW**	Spectra main lug module cover plate AFPML6XW	—	unknown
EDH-GEA-00244	**AMCB6TEDL**	Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter	—	unknown
EDH-GEA-00202	**APP1**	Spectra blank filler plate 1X (36, 40 in box)	—	unknown
EDH-GEA-00201	**APP1S**	Spectra blank filler plate 1X (27, 31 in box)	—	unknown
EDH-GEA-00203	**APP1W**	Spectra blank filler plate 1X (44 in box)	—	unknown
EDH-GEA-00205	**APP2**	Spectra blank filler plate 2X (36, 40 in box)	—	unknown
EDH-GEA-00204	**APP2S**	Spectra blank filler plate 2X (27, 31 in box)	—	unknown
EDH-GEA-00206	**APP2W**	Spectra blank filler plate 2X (44 in box)	—	unknown
EDH-GEA-00208	**APP3**	Spectra blank filler plate 3X (36, 40 in box)	—	unknown
EDH-GEA-00207	**APP3S**	Spectra blank filler plate 3X (27, 31 in box)	—	unknown
EDH-GEA-00209	**APP3W**	Spectra blank filler plate 3X (44 in box)	—	unknown
EDH-GEA-00211	**APP4**	Spectra blank filler plate 4X (36, 40 in box)	—	unknown
EDH-GEA-00210	**APP4S**	Spectra blank filler plate 4X (27, 31 in box)	—	unknown
EDH-GEA-00212	**APP4W**	Spectra blank filler plate 4X (44 in box)	—	unknown
EDH-GEA-00214	**APP5**	Spectra blank filler plate 5X (36, 40 in box)	—	unknown
EDH-GEA-00213	**APP5S**	Spectra blank filler plate 5X (27, 31 in box)	—	unknown
EDH-GEA-00215	**APP5W**	Spectra blank filler plate 5X (44 in box)	—	unknown
EDH-GEA-00217	**APP6**	Spectra blank filler plate 6X (36, 40 in box)	—	unknown
EDH-GEA-00216	**APP6S**	Spectra blank filler plate 6X (27, 31 in box)	—	unknown
EDH-GEA-00218	**APP6W**	Spectra blank filler plate 6X (44 in box)	—	unknown

EDH-GEA-00819 — 10096990P1 — GE — filler-plate — STATUS UNKNOWN

Spectra space filler 10096990P1 for FE breaker cover

OEM part number	10096990P1	**A**	S651 p.1 step 3; oem_spec
Description	Space filler attached to the FE breaker cover where no breaker is installed behind one of the holes; secured with two #10 x 3/8 in screws	**A**	S651 p.1; oem_spec
Breaker compatibility	Record Plus FE frame covers 10083889P19-P30	**A**	same as above
Torque values	27-32 in-lb (English text); French text says 15-20 lb-in (inconsistent between language versions)	**A**	S651 p.1 / p.3; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FE 250		
Not yet documented	Dimensions, Material		
Open question	*Torque differs between English (27-32 in-lb) and French (15-20 lb-in) text of DEH41271.*		

EDH-GEA-00434	168D1930P3	GE / ABB lineage	filler-plate	STATUS UNKNOWN

GE Filler, TEDL double-branch 3X, for 36/40 in wide - 168D1930P3

OEM part number	168D1930P3	A	S156 p.1 Table 1; oem_spec
Description	Filler, TEDL double-branch 3X, for 36/40 in wide (#CM 36, 40W TEDL DB 3X Filler)	A	same as above
Installation location	Spectra APNB bolt-on interior, TED6 breaker with TEDL current limiter, 3X (4.125 in) vertical space	A	S156 p.1; oem_spec
Kit contents	Qty 1 in circuit breaker cover kit AMCB6TEDL	A	S156 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Material		

EDH-GEA-00435	168D1930P4	GE / ABB lineage	filler-plate	STATUS UNKNOWN

GE Filler, TEDL double-branch 3X, for 44/45 in wide - 168D1930P4

OEM part number	168D1930P4	A	S156 p.1 Table 1; oem_spec
Description	Filler, TEDL double-branch 3X, for 44/45 in wide (#CM 44, 45W TEDL DB 3X Filler)	A	same as above
Installation location	Spectra APNB bolt-on interior, TED6 breaker with TEDL current limiter, 3X (4.125 in) vertical space	A	S156 p.1; oem_spec
Kit contents	Qty 1 in circuit breaker cover kit AMCB6TEDL	A	S156 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Material		

EDH-GEA-00423	208C2291P1	GE / ABB lineage	filler-plate	STATUS UNKNOWN

GE Filler center, G-frame double-branch bolt-on - 208C2291P1

OEM part number	208C2291P1	A	S402 DEH40129 p.1 Table 1; oem_spec
Description	Filler center, G-frame double-branch bolt-on	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB4GB/AMCB6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00465	208C4262G1	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G1 (TFJ..., single-branch, (3X))

OEM part number	208C4262G1	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TFJ, TFK, THFK, TFL breakers, single-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TFJ, TFK, THFK, TFL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00476	208C4262G10	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G10 (THQB..., double-branch, (4X))

OEM part number	208C4262G10	A	S405 DEH044 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for THQB, THHQB breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S405 DEH044 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	THQB, THHQB	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S405 DEH044 p.1 Table; oem_spec
Fasteners	Plastic space fillers snap into unused openings from the top side; cover pushed fully over four flexible prongs on the filler supports	A	S405 DEH044 p.1; oem_spec
OEM instruction document	DEH044 R02	A	S405 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: THQB / THHQB / TXQB		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00477	208C4262G11	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G11 (THQB..., double-branch, (4X))

OEM part number	208C4262G11	A	S405 DEH044 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for THQB, THHQB breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S405 DEH044 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	THQB, THHQB	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S405 DEH044 p.1 Table; oem_spec
Fasteners	Plastic space fillers snap into unused openings from the top side; cover pushed fully over four flexible prongs on the filler supports	A	S405 DEH044 p.1; oem_spec
OEM instruction document	DEH044 R02	A	S405 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: THQB / THHQB / TXQB		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00478	208C4262G12	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G12 (THQB..., double-branch, (4X))

OEM part number	208C4262G12	A	S405 DEH044 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for THQB, THHQB breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S405 DEH044 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	THQB, THHQB	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S405 DEH044 p.1 Table; oem_spec
Fasteners	Plastic space fillers snap into unused openings from the top side; cover pushed fully over four flexible prongs on the filler supports	A	S405 DEH044 p.1; oem_spec
OEM instruction document	DEH044 R02	A	S405 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: THQB / THHQB / TXQB		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00479	208C4262G13	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G13 (TEY, double-branch, (4X))

OEM part number	208C4262G13	A	S405 DEH044 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEY breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S405 DEH044 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEY	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S405 DEH044 p.1 Table; oem_spec
Fasteners	Plastic space fillers snap into unused openings from the top side; cover pushed fully over four flexible prongs on the filler supports	A	S405 DEH044 p.1; oem_spec
OEM instruction document	DEH044 R02	A	S405 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00480	208C4262G14	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G14 (TEY, double-branch, (4X))

OEM part number	208C4262G14	A	S405 DEH044 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEY breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S405 DEH044 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEY	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S405 DEH044 p.1 Table; oem_spec
Fasteners	Plastic space fillers snap into unused openings from the top side; cover pushed fully over four flexible prongs on the filler supports	A	S405 DEH044 p.1; oem_spec
OEM instruction document	DEH044 R02	A	S405 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00481	208C4262G15	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G15 (TEY, double-branch, (4X))

OEM part number	208C4262G15	A	S405 DEH044 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEY breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S405 DEH044 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEY	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S405 DEH044 p.1 Table; oem_spec
Fasteners	Plastic space fillers snap into unused openings from the top side; cover pushed fully over four flexible prongs on the filler supports	A	S405 DEH044 p.1; oem_spec
OEM instruction document	DEH044 R02	A	S405 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00482	208C4262G16	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G16 (SGDA..., single-branch, (4X))

OEM part number	208C4262G16	A	S407 DEH045 p.1 Table 1; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SGDA, SGHA, SGLA, SGPA breakers, single-branch mount, cover height 5-1/2 in (4X)	A	S407 DEH045 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S407 DEH045 p.1 Table; oem_spec
Fasteners	Single-branch: plastic spacer bars with four #6-20 x 1 in washer-head screws and #6 nut clips, 10 in-lb; double-branch: two #10-16 x 1/2 in washer-head screws and #10 nut clips into center barrier, 10 in-lb; steel space filler for single breaker in double-branch: two #10-32 x 3/8 in screws 25 in-lb	A	S407 DEH045 p.1; oem_spec
OEM instruction document	DEH045 R05	A	S407 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00483	208C4262G17	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G17 (SGDA..., single-branch, (4X))

OEM part number	208C4262G17	A	S407 DEH045 p.1 Table 1; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SGDA, SGHA, SGLA, SGPA breakers, single-branch mount, cover height 5-1/2 in (4X)	A	S407 DEH045 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S407 DEH045 p.1 Table; oem_spec
Fasteners	Single-branch: plastic spacer bars with four #6-20 x 1 in washer-head screws and #6 nut clips, 10 in-lb; double-branch: two #10-16 x 1/2 in washer-head screws and #10 nut clips into center barrier, 10 in-lb; steel space filler for single breaker in double-branch: two #10-32 x 3/8 in screws 25 in-lb	A	S407 DEH045 p.1; oem_spec
OEM instruction document	DEH045 R05	A	S407 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00484	208C4262G18	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G18 (SGDA..., single-branch, (4X))

OEM part number	208C4262G18	A	S407 DEH045 p.1 Table 1; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SGDA, SGHA, SGLA, SGPA breakers, single-branch mount, cover height 5-1/2 in (4X)	A	S407 DEH045 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S407 DEH045 p.1 Table; oem_spec
Fasteners	Single-branch: plastic spacer bars with four #6-20 x 1 in washer-head screws and #6 nut clips, 10 in-lb; double-branch: two #10-16 x 1/2 in washer-head screws and #10 nut clips into center barrier, 10 in-lb; steel space filler for single breaker in double-branch: two #10-32 x 3/8 in screws 25 in-lb	A	S407 DEH045 p.1; oem_spec
OEM instruction document	DEH045 R05	A	S407 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00486	208C4262G19	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G19 (SGDA..., double-branch, (4X))

OEM part number	208C4262G19	A	S407 DEH045 p.1 Table 1; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SGDA, SGHA, SGLA, SGPA breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S407 DEH045 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S407 DEH045 p.1 Table; oem_spec
Fasteners	Single-branch: plastic spacer bars with four #6-20 x 1 in washer-head screws and #6 nut clips, 10 in-lb; double-branch: two #10-16 x 1/2 in washer-head screws and #10 nut clips into center barrier, 10 in-lb; steel space filler for single breaker in double-branch: two #10-32 x 3/8 in screws 25 in-lb	A	S407 DEH045 p.1; oem_spec
OEM instruction document	DEH045 R05	A	S407 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00466	208C4262G2	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G2 (TFJ..., single-branch, (3X))

OEM part number	208C4262G2	**A**	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TFJ, TFK, THFK, TFL breakers, single-branch mount, cover height 4-1/8 in (3X)	**A**	S406 DEH042 p.1; oem_spec
Application	single-branch	**A**	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	**A**	same as above
Breaker compatibility	TFJ, TFK, THFK, TFL	**A**	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	**A**	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	**A**	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	**A**	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00470	208C4262G20	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G20 (TQD..., double-branch, (2X))

OEM part number	208C4262G20	**A**	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TQD, THQD breakers, double-branch mount, cover height 2-3/4 in (2X)	**A**	S406 DEH042 p.1; oem_spec
Application	double-branch	**A**	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	**A**	same as above
Breaker compatibility	TQD, THQD	**A**	same as above
Dimensions	Cover height 2-3/4 in (2X); for box width: 27 & 31 in panelboard / 35 in switchboard	**A**	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	**A**	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	**A**	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00471	208C4262G21	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G21 (TQD..., double-branch, (2X))

OEM part number	208C4262G21	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TQD, THQD breakers, double-branch mount, cover height 2-3/4 in (2X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Dimensions	Cover height 2-3/4 in (2X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00472	208C4262G22	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G22 (TQD..., double-branch, (2X))

OEM part number	208C4262G22	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TQD, THQD breakers, double-branch mount, cover height 2-3/4 in (2X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Dimensions	Cover height 2-3/4 in (2X); for box width: 44 in panelboard / 45 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00473	208C4262G23	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G23 (TQD..., double-branch, (3X))

OEM part number	208C4262G23	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TQD, THQD breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00474	208C4262G24	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G24 (TQD..., double-branch, (3X))

OEM part number	208C4262G24	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TQD, THQD breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00475	208C4262G25	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G25 (TQD..., double-branch, (3X))

OEM part number	208C4262G25	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TQD, THQD breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00459	208C4262G26	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G26 (TEB..., double-branch, (2X))

OEM part number	208C4262G26	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEB, TED, THED, TEL breakers, double-branch mount, cover height 2-3/4 in (2X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEB, TED, THED, TEL	A	same as above
Dimensions	Cover height 2-3/4 in (2X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00460	208C4262G27	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G27 (TEB..., double-branch, (2X))

OEM part number	208C4262G27	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEB, TED, THED, TEL breakers, double-branch mount, cover height 2-3/4 in (2X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEB, TED, THED, TEL	A	same as above
Dimensions	Cover height 2-3/4 in (2X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00461	208C4262G28	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G28 (TEB..., double-branch, (2X))

OEM part number	208C4262G28	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEB, TED, THED, TEL breakers, double-branch mount, cover height 2-3/4 in (2X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEB, TED, THED, TEL	A	same as above
Dimensions	Cover height 2-3/4 in (2X); for box width: 44 in panelboard / 45 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00462	208C4262G29	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G29 (TEB..., double-branch, (3X))

OEM part number	208C4262G29	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEB, TED, THED, TEL breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEB, TED, THED, TEL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00467	208C4262G3	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G3 (TFJ..., single-branch, (3X))

OEM part number	208C4262G3	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TFJ, TFK, THFK, TFL breakers, single-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TFJ, TFK, THFK, TFL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00463	208C4262G30	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G30 (TEB..., double-branch, (3X))

OEM part number	208C4262G30	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEB, TED, THED, TEL breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEB, TED, THED, TEL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00464	208C4262G31	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G31 (TEB..., double-branch, (3X))

OEM part number	208C4262G31	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEB, TED, THED, TEL breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEB, TED, THED, TEL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00444	208C4262G32	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G32 (SEDA..., double-branch, (3X))

OEM part number	208C4262G32	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SEDA, SEHA, SELA, SEPA breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00445	208C4262G33	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G33 (SEDA..., double-branch, (3X))

OEM part number	208C4262G33	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SEDA, SEHA, SELA, SEPA breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00446	208C4262G34	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G34 (SEDA..., double-branch, (3X))

OEM part number	208C4262G34	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SEDA, SEHA, SELA, SEPA breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00447	208C4262G35	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G35 (SEDA..., double-branch, (4X))

OEM part number	208C4262G35	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SEDA, SEHA, SELA, SEPA breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00448	208C4262G36	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G36 (SEDA..., double-branch, (4X))

OEM part number	208C4262G36	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SEDA, SEHA, SELA, SEPA breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00485	208C4262G49	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G49 (SGDA..., double-branch, (4X))

OEM part number	208C4262G49	A	S407 DEH045 p.1 Table 1; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SGDA, SGHA, SGLA, SGPA breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S407 DEH045 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 40 in wide panelboards or switchboards only (36/40 column, footnote *)	A	S407 DEH045 p.1 Table; oem_spec
Fasteners	Single-branch: plastic spacer bars with four #6-20 x 1 in washer-head screws and #6 nut clips, 10 in-lb; double-branch: two #10-16 x 1/2 in washer-head screws and #10 nut clips into center barrier, 10 in-lb; steel space filler for single breaker in double-branch: two #10-32 x 3/8 in screws 25 in-lb	A	S407 DEH045 p.1; oem_spec
OEM instruction document	DEH045 R05	A	S407 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00449	208C4262G53	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G53 (SFHA..., single-branch, (3X))

OEM part number	208C4262G53	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, single-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00450	208C4262G54	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G54 (SFHA..., single-branch, (3X))

OEM part number	208C4262G54	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, single-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00451	208C4262G55	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G55 (SFHA..., single-branch, (3X))

OEM part number	208C4262G55	**A**	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, single-branch mount, cover height 4-1/8 in (3X)	**A**	S406 DEH042 p.1; oem_spec
Application	single-branch	**A**	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	**A**	same as above
Breaker compatibility	SFHA, SFLA, SFPA	**A**	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	**A**	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	**A**	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	**A**	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00452	208C4262G56	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G56 (SFHA..., single-branch, (4X))

OEM part number	208C4262G56	**A**	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, single-branch mount, cover height 5-1/2 in (4X)	**A**	S406 DEH042 p.1; oem_spec
Application	single-branch	**A**	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	**A**	same as above
Breaker compatibility	SFHA, SFLA, SFPA	**A**	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard	**A**	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	**A**	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	**A**	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00453	208C4262G57	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G57 (SFHA..., single-branch, (4X))

OEM part number	208C4262G57	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, single-branch mount, cover height 5-1/2 in (4X)	A	S406 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00454	208C4262G58	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G58 (SFHA..., double-branch, (3X))

OEM part number	208C4262G58	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00455	208C4262G59	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G59 (SFHA..., double-branch, (3X))

OEM part number	208C4262G59	**A**	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, double-branch mount, cover height 4-1/8 in (3X)	**A**	S406 DEH042 p.1; oem_spec
Application	double-branch	**A**	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	**A**	same as above
Breaker compatibility	SFHA, SFLA, SFPA	**A**	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	**A**	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	**A**	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	**A**	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00468	208C4262G6	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G6 (TFJ..., double-branch, (3X))

OEM part number	208C4262G6	**A**	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TFJ, TFK, THFK, TFL breakers, double-branch mount, cover height 4-1/8 in (3X)	**A**	S406 DEH042 p.1; oem_spec
Application	double-branch	**A**	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	**A**	same as above
Breaker compatibility	TFJ, TFK, THFK, TFL	**A**	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	**A**	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	**A**	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	**A**	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00456	208C4262G60	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G60 (SFHA..., double-branch, (3X))

OEM part number	208C4262G60	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00457	208C4262G61	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G61 (SFHA..., double-branch, (4X))

OEM part number	208C4262G61	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00458	208C4262G62	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G62 (SFHA..., double-branch, (4X))

OEM part number	208C4262G62	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00469	208C4262G7	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G7 (TFJ..., double-branch, (3X))

OEM part number	208C4262G7	A	S406 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TFJ, TFK, THFK, TFL breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S406 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TFJ, TFK, THFK, TFL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S406 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S406 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S406 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00499	252B1768G1	GE / ABB lineage	filler-plate	STATUS UNKNOWN

GE End filler plate, K-frame, 44 in panelboard / 45 in switchboard - 252B1768G1

OEM part number	252B1768G1	A	S404 GEH5629 p.1; oem_spec
Description	End filler plate, K-frame, 44 in panelboard / 45 in switchboard	A	same as above
Application	44 in wide panelboard; 45 in wide switchboard	A	S404 GEH5629 p.1 Tables 1-2; oem_spec
Fasteners	#10-32 x 9/16 in screws, 15 in-lb	A	S404 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	Dimensions, Material		

EDH-GEA-00500	252B1768G2	GE / ABB lineage	filler-plate	STATUS UNKNOWN

GE End filler plate, K-frame, 40 in panelboard or switchboard - 252B1768G2

OEM part number	252B1768G2	A	S404 GEH5629 p.1; oem_spec
Description	End filler plate, K-frame, 40 in panelboard or switchboard	A	same as above
Application	40 in wide panelboard or switchboard	A	S404 GEH5629 p.1 Tables 1-2; oem_spec
Fasteners	#10-32 x 9/16 in screws, 15 in-lb	A	S404 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	Dimensions, Material		

EDH-GEA-00437	252B2056P8	GE / ABB lineage	filler-plate	STATUS UNKNOWN

GE Spacer plate TED6 with TEDL - 252B2056P8

OEM part number	252B2056P8	A	S156 p.1 Table 1; oem_spec
Description	Spacer plate TED6 with TEDL	A	same as above
Installation location	Spectra APNB bolt-on interior, TED6 breaker with TEDL current limiter, 3X (4.125 in) vertical space	A	S156 p.1; oem_spec
Kit contents	Qty 1 in circuit breaker cover kit AMCB6TEDL	A	S156 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Material		

EDH-GEA-00501	AFP10T	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP10T

OEM part number	AFP10T	A	S408 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 400 A & 600 A J or T fuse, 10X main or branch	A	S408 p.1 Table 1; oem_spec
Dimensions	For box width 36, 44 in; X height per description (1X = 1-3/8 in)	A	same as above
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S408 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00820	AFP10T44	GE	filler-plate	STATUS UNKNOWN

Spectra filler kit AFP10T44 for 400-600 A J/T fused switch in 44 in enclosure

OEM part number	AFP10T44	A	S653 p.1 step 4; oem_spec
Description	Filler plate kit to cover the width of a 44-inch-wide enclosure when a 400-600 A J or T fused switch (supplied with fillers for 36-inch width) is mounted	A	S653 p.1; oem_spec
Application	Spectra power panelboard 400-600 A fusible switch (ADS), 44 in wide enclosure	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Kit contents, Material		

EDH-GEA-00502	AFP10X	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP10X

OEM part number	AFP10X	A	S408 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 400 A & 600 A R fuse, 10X main or branch	A	S408 p.1 Table 1; oem_spec
	empower: "FP 10X SWITCH FILLER PLATE" (UPC 783164015270)	A	S426 empower page AFP10X; oem_spec
Dimensions	For box width 44 in; X height per description (1X = 1-3/8 in)	A	S408 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S408 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00503	AFP19X	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP19X

OEM part number	AFP19X	A	S408 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 800 A & 1200 A, 19X main or branch	A	S408 p.1 Table 1; oem_spec
	empower: "FP 19X SWITCH FILLER PLATE" (UPC 783164015294)	A	S426 empower page AFP19X; oem_spec
Dimensions	For box width 44 in; X height per description (1X = 1-3/8 in)	A	S408 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S408 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00131	AFP2FBD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)

OEM part number	AFP2FBD	A	S143 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	A	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S143 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00128	AFP2QDD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)

OEM part number	AFP2QDD	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	A	S143 p.11-43; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	Filler (cover) kit used with: AMC4QD; bolt-on AMCB6QD/4QD	A	S416 GEH5643 p.2; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC4QDFP (2-pole double branch TQD or THQD, 225 A, 2X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TQD, THQD	A	S143 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	A	same as above
OEM instruction document	Used with AMCB4QD/AMCB6QD per DEH065	A	S154 DEH065 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: TQD / THQD		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00129	AFP2TED	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)

OEM part number	AFP2TED	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	A	S143 p.11-43; oem_spec
	empower: "FP AMC 4EB" (UPC 783164015331)	A	S426 empower page AFP2TED; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	Filler (cover) kit used with: AMC4EB; bolt-on AMCB6EB/4SE/4EB	A	S417 GEH5625 p.2; DEH047 p.1; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC4EBFP (2-pole double branch TEB or TED, 150 A, 3X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEB, TED	A	S143 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00490	AFP3ELD	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3ELD

OEM part number	AFP3ELD	A	S417 GEH5625 p.2 Table 1; oem_spec
Description	Filler plate kit for module AMC6EL	A	same as above
Breaker compatibility	TEL	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00130	AFP3EYD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3EYD (TEY, dual)

OEM part number	AFP3EYD	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	S143 p.11-43; oem_spec
	empower: "FP AMC 6EY" (UPC 783164015355)	A	S426 empower page AFP3EYD; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	Filler (cover) kit used with: AMC6EY; bolt-on AMCB6EY/AMCB4EY	A	S415 GEH5677 p.1; DEH062 p.1; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC6EYFP (3-pole double branch TEY, 100 A, 3X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEY	A	S143 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00132	AFP3FBD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)

OEM part number	AFP3FBD	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	S143 p.11-43; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC6FBFP (3-pole double branch FBV, FBN, FBH or FBL, 100 A, 3X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S143 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00495	AFP3QBD	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3QBD

OEM part number	AFP3QBD	A	S415, S649 GEH5677 p.1 Table 1; oem_spec
Description	Filler plate kit for module AMC6QB	A	S415, S426 GEH5677 p.1 Table 1; oem_spec
	empower: "FP AMC 6QB" (UPC 783164015379)	A	S426 empower page AFP3QBD; oem_spec
Application	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC6QBFP (3-pole double branch THQB or THHQB, 100 A, 3X)	A	S649 p.4; oem_spec
Breaker compatibility	THQB, THHQB	A	S415, S426 GEH5677 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00133	AFP3QDD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)

OEM part number	AFP3QDD	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	S143 p.11-43; oem_spec
	empower: "FP AMC 6QD" (UPC 783164015386)	A	S426 empower page AFP3QDD; oem_spec
Application	Filler (cover) kit used with: AMC6QD; bolt-on AMCB6QD/4QD	A	S416 GEH5643 p.2; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC6QDFP (3-pole double branch TQD or THQD, 225 A, 3X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TQD, THQD	A	S143 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
OEM instruction document	Used with AMCB4QD/AMCB6QD per DEH065	A	S154 DEH065 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: TQD / THQD		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00134	AFP3SED	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, dual)

OEM part number	AFP3SED	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	S143 p.11-43; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	Filler (cover) kit used with: AMC6EB, AMC4SE (plug-in); bolt-on AMCB6EB/4SE/4EB	A	S417 GEH5625 p.2; DEH047 p.1; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC6EBFP (3-pole double branch TEB, TED, THED, SEDA, SEHA, SELA or SEPA, 150 A, 3X); AMC4SEFP (2-pole double branch SEDA, SEHA, SELA, SEPA or THED, 150 A, 3X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP	A	S143 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00135	AFP3SFD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)

OEM part number	AFP3SFD	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	S143 p.11-43; oem_spec
	empower: "FP AMC 6FS 4FI" (UPC 783164015409)	A	S426 empower page AFP3SFD; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	Filler (cover) kit used with: AMC6FJ, AMC4FJ; bolt-on AMCB6FJ/4FJ	A	S411 GEH5626 p.3; DEH059 p.1; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC6FJFP (3-pole double branch SFHA, SFLA or SFPA, 250 A, 3X); AMC4FJFP (2-pole double branch SFHA, SFLA or SFPA, 250 A, 3X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S143 p.11-43; oem_spec
Dimensions	3X vertical; box width 31-44 in	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00139	AFP3SFS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)

OEM part number	AFP3SFS	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	S143 p.11-43; oem_spec
	empower: "FP AMC 3FJ 2FJ" (UPC 783164015416)	A	S426 empower page AFP3SFS; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	Filler (cover) kit used with: AMC3FJ, AMC2FJ; bolt-on AMCB3FJ/2FJ	A	S411 GEH5626 p.3; DEH059 p.1; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC3FJFP (3-pole single branch SFHA, SFLA or SFPA, 250 A, 3X); AMC2FJFP (2-pole single branch SFHA, SFLA or SFPA, 250 A, 3X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S143 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00489	AFP3TED	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3TED

OEM part number	AFP3TED	A	S397 DEH047 p.1; oem_spec
Description	Circuit breaker cover kit listed for bolt-on kits AMCB6EB/AMCB4SE/AMCB4EB	A	same as above
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00136	AFP3TFD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)

OEM part number	AFP3TFD	A	S143 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	Filler (cover) kit used with: bolt-on AMCB6FJ/4FJ (TF breakers)	A	S398 DEH059 p.1; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S143 p.11-43; oem_spec
Dimensions	2X, 3X vertical; box width 36-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00140	AFP3TFS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)

OEM part number	AFP3TFS	A	S143 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	Filler (cover) kit used with: bolt-on AMCB3FJ/2FJ (TF breakers)	A	S398 DEH059 p.1; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S143 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00137	AFP4FGD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)

OEM part number	AFP4FGD	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	S143 p.11-43; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC6FGBFP (3-pole double branch FGL, FGN, FGH or FGP, 600 A, 4X); AMC4FGBFP (2-pole double branch FGV, FGN, FGH or FGP, 600 A, 4X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S143 p.11-43; oem_spec
Dimensions	4X vertical; box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00141	AFP4FGS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)

OEM part number	AFP4FGS	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	S143 p.11-43; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC3FGMFP (3-pole single branch FGV, FGN, FGH or FGP, 600 A, 4X); AMC2FGMFP (2-pole single branch FGV, FGN, FGH or FGP, 600 A, 4X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S143 p.11-43; oem_spec
Dimensions	4X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00488	AFP4SED	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SED

OEM part number	AFP4SED	A	S417 GEH5625 p.2 Table 1; DEH047 p.1; oem_spec
Description	Filler plate kit for modules AMC6EBS and AMC4EBS; also listed as cover kit for bolt-on kits AMCB6EB/AMCB4SE/AMCB4EB	A	S417, S397 GEH5625 p.2 Table 1; DEH047 p.1; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA / TEB, TED, THED	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00491	AFP4SFD	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SFD

OEM part number	AFP4SFD	A	S411 GEH5626 p.3 Table 1; oem_spec
Description	Filler plate kit for modules AMC6FLS and AMC4FLS (double branch, 4X)	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00492	AFP4SFS	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SFS

OEM part number	AFP4SFS	A	S411 GEH5626 p.3 Table 1; oem_spec
Description	Filler plate kit for modules AMC3FLS and AMC2FLS (single)	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00496	AFP4SGC	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SGC

OEM part number	AFP4SGC	A	S413 GEH5673 p.3; oem_spec
Description	Filler plate kit named in GEH5673 for modules AMC4GB/AMC6GB (possible misprint of AFP4SGD)	A	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Kit contents		
Open question	*Is AFP4SGC a real catalog number or a misprint of AFP4SGD/AFP4SGS?*		

EDH-GEA-00138	AFP4SGD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)

OEM part number	AFP4SGD	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	S143 p.11-43; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	Filler (cover) kit used with: bolt-on AMCB4GB/AMCB6GB	A	S402 DEH40129 p.1; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC6GBFP (3-pole double branch SGDA, SGHA, SGLA or SGPA (SGDA 400 A max), 600 A, 4X); AMC4GBFP (2-pole double branch SGDA, SGHA, SGLA or SGPA (SGDA 400 A max), 600 A, 4X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S143 p.11-43; oem_spec
Dimensions	4X vertical; box width 40-44 in	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00142	AFP4SGS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)

OEM part number	AFP4SGS	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	S143 p.11-43; oem_spec
	empower: "FP AMC 3GM 2GM" (UPC 783164015478)	A	S426 empower page AFP4SGS; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	Filler (cover) kit used with: AMC2GM, AMC3GM; bolt-on AMCB2GM/3GM	A	S155 GEH5674 p.2; DEH060 p.1; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC3GMFP (3-pole single branch SGDA, SGHA, SGLA or SGPA, 600 A, 4X); AMC2GMFP (2-pole single branch SGDA, SGHA, SGLA or SGPA, 600 A, 4X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S143 p.11-43; oem_spec
Dimensions	4X vertical; box width 27-44 in	A	same as above
OEM instruction document	GEH5674: install filler plate kit AFP4SGS on AMC2GM/AMC3GM module	A	S155 GEH5674 step 5; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00504	AFP4X	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP4X

OEM part number	AFP4X	A	S408, S652 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 30 A & 60 A, 4X	A	S408 p.1 Table 1; oem_spec
	empower: "FP 4X SWITCH" (UPC 783164015485)	A	S426 empower page AFP4X; oem_spec
Application	Replacement filler plate kit for 30-200 A Spectra fusible switch units: 30 A 240/600 V (H,J,K,R fuses) and 30 A 240 V (H,K,R) switch, 26 in enclosure width (Table 1 "Replacement filler plate kits") (table columns partly scrambled in text rendering; amp/fuse grouping approximate)	A	S652 p.2 Table 1; oem_spec
Dimensions	For box width 44 in; X height per description (1X = 1-3/8 in)	A	S408 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S408 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00143	AFP5LCS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP5LCS (SKP, single)

OEM part number	AFP5LCS	A	S143 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2-pole	A	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SKP	A	S143 p.11-43; oem_spec
Dimensions	6X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00505	AFP5X	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP5X

OEM part number	AFP5X	A	S408, S652 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 60 A & 100 A, 5X	A	S408 p.1 Table 1; oem_spec
	empower: "FP 5X SWITCH" (UPC 783164016192)	A	S426 empower page AFP5X; oem_spec
Application	Replacement filler plate kit for 30-200 A Spectra fusible switch units: 60 A 600 V (H,J,K,R) switch, 26 in (Table 1 "Replacement filler plate kits") (table columns partly scrambled in text rendering; amp/fuse grouping approximate)	A	S652 p.2 Table 1; oem_spec
Dimensions	For box width 44 in; X height per description (1X = 1-3/8 in)	A	S408 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S408 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00144	AFP6SKS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)

OEM part number	AFP6SKS	A	S143, S649 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 3-pole	A	S143 p.11-43; oem_spec
	empower: "FP AMC 3KM 2KM" (UPC 783164016222)	A	S426 empower page AFP6SKS; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S143 p.11-40; oem_spec
	"Filler Plate Only Kit" for Spectra plug-in switchboard distribution sections, paired with complete kits: AMC3KMFP (3-pole single branch SKHA or SKLA (40-44 in); SKPA (44 in), 1200 A, 6X); AMC2KMFP (2-pole single branch SKHA or SKLA (40-44 in); SKPA (44 in), 1200 A, 6X)	A	S649 p.4; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S143 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SKP, SKH, SKL, TKM, THKM	A	S143 p.11-43; oem_spec
	TKM, THKM, TK4V, TKL4V, SKHA, SKLA, SKPA (SKPA only in 44 in panelboard / 45 in switchboard)	A	S404 GEH5629 p.1; oem_spec
Kit contents	Lug covers 455C592P1 (furnished, for TKM/THKM) and 455C592P2 (furnished, for TK4V/TKL4V); SKHA/SKLA/SKPA use covers furnished with breaker; end filler plates 252B1768G2 (40 in panelboard or switchboard) or 252B1768G1 (44 in panelboard, 45 in switchboard); #10-32 x 9/16 in screws	A	S404 GEH5629 p.1 Tables 1-2; oem_spec
Dimensions	6X vertical; box width 44 in	A	S143 p.11-43; oem_spec
Torque values	End filler plates to breaker sides, #10-32 x 9/16 in screws, 15 in-lb	A	S404 GEH5629 p.1; oem_spec
OEM instruction document	GEH5629 R05 (08/2001); breaker per GEH-5623 (plug-in) or DEH-061 (bolt-on)	A	S404 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Requires	455C592P1 (EDH-GEA-00497), 455C592P2 (EDH-GEA-00498), 252B1768G1 (EDH-GEA-00499), 252B1768G2 (EDH-GEA-00500)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00494	AFP6TJD	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP6TJD

OEM part number	AFP6TJD	A	S414 GEH5624 p.3; oem_spec
Description	Filler plate kit for modules AMC4JK and AMC6JK (double)	A	same as above
Breaker compatibility	TJK, TJD, TJJ, THJK, TJ4V, THJ4V, TJL4V	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00493	AFP6TJS	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP6TJS

OEM part number	AFP6TJS	A	S414 GEH5624 p.3; oem_spec
Description	Filler plate kit for modules AMC2JK and AMC3JK (single)	A	same as above
Breaker compatibility	TJK, TJD, TJJ, THJK, TJ4V, THJ4V, TJL4V	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00506	AFP7T	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP7T

OEM part number	AFP7T	A	S408, S652 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 100 A & 200 A T fuse, 7X	A	S408 p.1 Table 1; oem_spec
Application	Replacement filler plate kit for 30-200 A Spectra fusible switch units: 100 A 240/600 V T-fuse and T/J switch, 26 in (Table 1 "Replacement filler plate kits") (table columns partly scrambled in text rendering; amp/fuse grouping approximate)	A	S652 p.2 Table 1; oem_spec
Dimensions	For box width 44 in; X height per description (1X = 1-3/8 in)	A	S408 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S408 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00508	AFP7X	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP7X

OEM part number	AFP7X	A	S408, S652 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 200 A R fuse, 7X main or single branch	A	S408 p.1 Table 1; oem_spec
	empower: "FP 7X SWITCH" (UPC 783164016345)	A	S426 empower page AFP7X; oem_spec
Application	Replacement filler plate kit for 30-200 A Spectra fusible switch units: 100 A H,J,K,R switch, 26 in (Table 1 "Replacement filler plate kits") (table columns partly scrambled in text rendering; amp/fuse grouping approximate)	A	S652 p.2 Table 1; oem_spec
Dimensions	For box width 36, 44 in; X height per description (1X = 1-3/8 in)	A	S408 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S408 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00507	AFP7X2	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP7X2

OEM part number	AFP7X2	A	S408, S652 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 200 A R fuse, 7X double branch	A	S408 p.1 Table 1; oem_spec
	empower: "FILLER PLATE" (UPC 783164016376)	A	S426 empower page AFP7X2; oem_spec
Application	Replacement filler plate kit for 30-200 A Spectra fusible switch units: 200 A 240/600 V H,K,R switch, 32 in (Table 1 "Replacement filler plate kits") (table columns partly scrambled in text rendering; amp/fuse grouping approximate)	A	S652 p.2 Table 1; oem_spec
Dimensions	For box width 44 in; X height per description (1X = 1-3/8 in)	A	S408 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S408 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00883	AFPML4X	GE	filler-plate	STATUS UNKNOWN

Spectra main lug module cover plate AFPML4X

OEM part number	AFPML4X	A	S650 9-112; oem_spec
Description	Cover plate included with AML main lug modules (FP suffix) - 4X height; box widths 27, 36, 44 in (with AML3250SFP/AML3400SFP/AML3600SFP)	A	S650 9-112 "Lug Kits and Modules Plug-In Spectra"; oem_spec
Installation location	Covers the main lug module area of the Spectra interior	B	S650 9-112; inference
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions		
Open question	*Is AFPML orderable separately? BuyLog lists it only as included cover plate; DEH070 also references AFPML for AMB...F kits (27/31, 36/40, 44 in widths).*		

EDH-GEA-00884	AFPML6X	GE	filler-plate	STATUS UNKNOWN

Spectra main lug module cover plate AFPML6X

OEM part number	AFPML6X	A	S650 9-112; oem_spec
Description	Cover plate included with AML main lug modules (FP suffix) - 6X height; box widths 36-44 in (with AML3250FP/3400FP/3600FP and C versions)	A	S650 9-112 "Lug Kits and Modules Plug-In Spectra"; oem_spec
Installation location	Covers the main lug module area of the Spectra interior	B	S650 9-112; inference
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions		
Open question	*Is AFPML orderable separately? BuyLog lists it only as included cover plate; DEH070 also references AFPML for AMB...F kits (27/31, 36/40, 44 in widths).*		

EDH-GEA-00885	AFPML6XW	GE	filler-plate	STATUS UNKNOWN

Spectra main lug module cover plate AFPML6XW

OEM part number	AFPML6XW	A	S650 9-112; oem_spec
Description	Cover plate included with AML main lug modules (FP suffix) - 6X wide height; box widths 36-44 in (with AML3800FP/3120FP and C versions)	A	S650 9-112 "Lug Kits and Modules Plug-In Spectra"; oem_spec
Installation location	Covers the main lug module area of the Spectra interior	B	S650 9-112; inference
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions		
Open question	*Is AFPML orderable separately? BuyLog lists it only as included cover plate; DEH070 also references AFPML for AMB...F kits (27/31, 36/40, 44 in widths).*		

EDH-GEA-00244	AMCB6TEDL	GE	filler-plate	STATUS UNKNOWN

Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter

OEM part number	AMCB6TEDL	A	S156 p.1; oem_spec
Description	Circuit breaker cover kit for TED136 breaker with TEDL36 current limiter on Spectra APNB bolt-on interiors; 3X (4.125 in) vertical space	A	same as above
	empower: "Description: STRAP KIT TED6 WITH TEDL PROTECTOR UPC:"	A	S426 empower page AMCB6TEDL; oem_spec
Kit contents	(1) filler 36/40W TEDL DB 3X 168D1930P3; (1) filler 44/45W 168D1930P4; (2) cover support 3X 208C1850P3; (1) barrier center 252B1667P1; (1) spacer plate TED6 w/TEDL 252B2056P8; (2) steel drive rivet #10 x 1/2 331A3329P2; (2) thread-forming screw 10-32 x 3/8 N722EP16006B6; instruction DEH40392	A	S156 Table 1; oem_spec
Dimensions	3X = 4.125 in vertical; fits 36W/40W/44W panelboards and 40W/45W switchboards	A	S156 p.1; oem_spec
OEM instruction document	DEH40392 R01	A	S156 oem_spec
Identification features	Push-on filler snaps over flexible prongs on filler supports; barrier center riveted to filler	A	S156 steps 2-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, Status		

EDH-GEA-00202	APP1	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (36, 40 in box)

OEM part number	APP1	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 1X 36 BOX" (UPC 783175253081)	A	S426 empower page APP1; oem_spec
Application	Covers unused spaces; 1X (1X = 1 3/8 in); box width range 36", 40"; switchboard section width 40 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	1X = 1 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	S143 p.11-44; oem_spec
	empower specification "Box/Front Height 1.375 in"	A	S426 empower page APP1; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00201	APP1S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (27, 31 in box)

OEM part number	APP1S	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 1X 27 BOX" (UPC 783175253098)	A	S426 empower page APP1S; oem_spec
Application	Covers unused spaces; 1X (1X = 1 3/8 in); box width range 27", 31"; switchboard section width 35 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	1X = 1 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00203	APP1W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (44 in box)

OEM part number	APP1W	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 1X 44 BOX" (UPC 783175253104)	A	S426 empower page APP1W; oem_spec
Application	Covers unused spaces; 1X (1X = 1 3/8 in); box width range 44"; switchboard section width 45 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	1X = 1 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00205	APP2	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (36, 40 in box)

OEM part number	APP2	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 2X 36 BOX" (UPC 783175253111)	A	S426 empower page APP2; oem_spec
Application	Covers unused spaces; 2X (1X = 1 3/8 in); box width range 36", 40"; switchboard section width 40 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	2X = 2 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	S143 p.11-44; oem_spec
	empower specification "Box/Front Height 2.375 in"	A	S426 empower page APP2; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00204	APP2S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (27, 31 in box)

OEM part number	APP2S	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 2X 27 BOX" (UPC 783175253128)	A	S426 empower page APP2S; oem_spec
Application	Covers unused spaces; 2X (1X = 1 3/8 in); box width range 27", 31"; switchboard section width 35 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	2X = 2 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00206	APP2W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (44 in box)

OEM part number	APP2W	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 2X 44 BOX" (UPC 783175253197)	A	S426 empower page APP2W; oem_spec
Application	Covers unused spaces; 2X (1X = 1 3/8 in); box width range 44"; switchboard section width 45 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	2X = 2 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00208	APP3	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (36, 40 in box)

OEM part number	APP3	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 3X 36 BOX" (UPC 783175253142)	A	S426 empower page APP3; oem_spec
Application	Covers unused spaces; 3X (1X = 1 3/8 in); box width range 36", 40"; switchboard section width 40 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	3X = 3 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00207	APP3S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (27, 31 in box)

OEM part number	APP3S	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 3X 27 BOX" (UPC 783175253159)	A	S426 empower page APP3S; oem_spec
Application	Covers unused spaces; 3X (1X = 1 3/8 in); box width range 27", 31"; switchboard section width 35 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	3X = 3 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00209	APP3W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (44 in box)

OEM part number	APP3W	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 3X 44 BOX" (UPC 783175253166)	A	S426 empower page APP3W; oem_spec
Application	Covers unused spaces; 3X (1X = 1 3/8 in); box width range 44"; switchboard section width 45 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	3X = 3 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00211	APP4	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (36, 40 in box)

OEM part number	APP4	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 4X 36 BOX" (UPC 783175253173)	A	S426 empower page APP4; oem_spec
Application	Covers unused spaces; 4X (1X = 1 3/8 in); box width range 36", 40"; switchboard section width 40 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	4X = 4 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00210	APP4S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (27, 31 in box)

OEM part number	APP4S	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	S143 p.11-44; oem_spec
Application	Covers unused spaces; 4X (1X = 1 3/8 in); box width range 27", 31"; switchboard section width 35 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	4X = 4 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00212	APP4W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (44 in box)

OEM part number	APP4W	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 4X 44 BOX" (UPC 783175253272)	A	S426 empower page APP4W; oem_spec
Application	Covers unused spaces; 4X (1X = 1 3/8 in); box width range 44"; switchboard section width 45 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	4X = 4 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00214	APP5	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (36, 40 in box)

OEM part number	APP5	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	S143 p.11-44; oem_spec
Application	Covers unused spaces; 5X (1X = 1 3/8 in); box width range 36", 40"; switchboard section width 40 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	5X = 5 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00213	APP5S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (27, 31 in box)

OEM part number	APP5S	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 5X 27 BOX" (UPC 783175253210)	A	S426 empower page APP5S; oem_spec
Application	Covers unused spaces; 5X (1X = 1 3/8 in); box width range 27", 31"; switchboard section width 35 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	5X = 5 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	S143 p.11-44; oem_spec
	empower specification "Box/Front Height 5.375 in"	A	S426 empower page APP5S; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00215	APP5W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (44 in box)

OEM part number	APP5W	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	S143 p.11-44; oem_spec
Application	Covers unused spaces; 5X (1X = 1 3/8 in); box width range 44"; switchboard section width 45 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	5X = 5 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00217	APP6	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (36, 40 in box)

OEM part number	APP6	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	S143 p.11-44; oem_spec
	empower: "FULL WIDTH FILLER 6X 36 BOX" (UPC 783175253234)	A	S426 empower page APP6; oem_spec
Application	Covers unused spaces; 6X (1X = 1 3/8 in); box width range 36", 40"; switchboard section width 40 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	6X = 6 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00216	APP6S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (27, 31 in box)

OEM part number	APP6S	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	S143 p.11-44; oem_spec
Application	Covers unused spaces; 6X (1X = 1 3/8 in); box width range 27", 31"; switchboard section width 35 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	6X = 6 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00218	APP6W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (44 in box)

OEM part number	APP6W	A	S143, S650 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	S143 p.11-44; oem_spec
Application	Covers unused spaces; 6X (1X = 1 3/8 in); box width range 44"; switchboard section width 45 in; includes filler plate support brackets and hardware	A	S650 9-111 "Filler Plates Plug-In or Bolt-On Spectra"; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S409 GEH5583 p.1; oem_spec
Dimensions	6X = 6 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	S143 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S409 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S409 p.1; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Finish / plating, Material, Status		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00545	**10085396G1**	Spectra ADF dead-front hardware kit 10085396G1	—	unknown
EDH-GEA-00194	**AHKBE1**	Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)	SE **A**	unknown
EDH-GEA-00195	**AHKBF1**	Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)	SF **A**	unknown
EDH-GEA-00200	**AHKBFB1**	Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)	FB **A**	unknown
EDH-GEA-00198	**AHKBFD1**	Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00199	**AHKBFG1**	Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00196	**AHKBG1**	Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)	SG **A**	unknown
EDH-GEA-00197	**AHKBQ1**	Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)	THQD **A**	unknown
EDH-GEA-00185	**AHKE1**	Spectra plug-in single-breaker mounting hardware AHKE1	For AMC modules: AMC6EB, AMC4SE, AMC4EB, AMC6EBS **A**	unknown
EDH-GEA-00186	**AHKEL1**	Spectra plug-in single-breaker mounting hardware AHKEL1	For AMC modules: AMC6EL **A**	unknown
EDH-GEA-00187	**AHKF1**	Spectra plug-in single-breaker mounting hardware AHKF1	For AMC modules: AMC2FLS, AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC **A**	unknown
EDH-GEA-00192	**AHKFD1**	Spectra plug-in single-breaker mounting hardware AHKFD1	For AMC modules: FCS/FCV/FCN/FCH/FCL modules **A**	unknown
EDH-GEA-00193	**AHKFG1**	Spectra plug-in single-breaker mounting hardware AHKFG1	For AMC modules: FGV/FGN/FGH/FGP modules **A**	unknown
EDH-GEA-00188	**AHKG1**	Spectra plug-in single-breaker mounting hardware AHKG1	For AMC modules: AMC2GM, AMC6GB, AMC4GB, AMC3GM **A**	unknown
EDH-GEA-00189	**AHKJ1**	Spectra plug-in single-breaker mounting hardware AHKJ1	For AMC modules: AMC2JK, AMC6JK, AMC4JK, AMC3JK **A**	unknown
EDH-GEA-00190	**AHKLB1**	Spectra plug-in single-breaker mounting hardware AHKLB1	For AMC modules: AMC3LB, AMC6LB **A**	unknown
EDH-GEA-00191	**AHKQ1**	Spectra plug-in single-breaker mounting hardware AHKQ1	For AMC modules: AMC4QD, AMC6QD **A**	unknown

EDH-GEA-00545 **10085396G1** GE / ABB lineage hardware-kit **STATUS UNKNOWN**

Spectra ADF dead-front hardware kit 10085396G1

OEM part number	10085396G1	**A**	S423 GEH5930 p.1 Table 1; oem_spec
Description	Hardware kit for type ADF dead front	**A**	S423 p.1; oem_spec
Kit contents	192A6976P189 #10-32 x 7/16 screw (2); 252B2269P2 label (1); 331A2631P2 plug (4); 44A718891P2 poly bag (1); GEH5930 instructions (1); N722P21008B6 1/4-20 x 1/2 screw (8)	**A**	S423 p.1 Table 2; oem_spec
Torque values	Posts and dead-front ends 1/4-20 screws 50-60 in-lb; line end to main lug brackets #10-32 x 7/16 screws 25-30 in-lb; door #10-32 x 11/16 self-tapping screws 25-30 in-lb	**A**	S423 pp.1-3; oem_spec
Cross-links	Families: SPECTRA-PP		

EDH-GEA-00194	AHKBE1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)

OEM part number	AHKBE1	A	S143 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
	Replacement hardware kit for TEB/TED/THED/SE bolt-on kits AMCB6EB/AMCB4SE/AMCB4EB	A	S397 DEH047 p.1; oem_spec
Breaker compatibility	SE	A	S143 p.11-44; oem_spec
Kit contents	Hardware items of DEH047 Table 1 (fasteners) - exact subset not itemised	C	S397 DEH047 p.1; inference
OEM instruction document	DEH047	A	S397 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	kit_contents (itemised), Material, Status		

EDH-GEA-00195	AHKBF1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)

OEM part number	AHKBF1	A	S143 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
	Replacement hardware kit for SF/TF bolt-on kits AMCB6FJ/3FJ/2FJ/4FJ	A	S398 DEH059 p.1; oem_spec
Breaker compatibility	SF	A	S143 p.11-44; oem_spec
Kit contents	Hardware items of DEH059 Table 1 (fasteners) - exact subset not itemised	C	S398 DEH059 p.1; inference
OEM instruction document	DEH059	A	S398 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	kit_contents (itemised), Material, Status		

EDH-GEA-00200	AHKBFB1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)

OEM part number	AHKBFB1	A	S143 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00198	AHKBFD1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)

OEM part number	AHKBFD1	A	S143 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00199	AHKBFG1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)

OEM part number	AHKBFG1	A	S143 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FGV, FGN, FGH, FGP	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00196	AHKBG1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)

OEM part number	AHKBG1	A	S143 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
	Replacement hardware kit for SG main/single-branch bolt-on kits AMCB2GM/AMCB3GM	A	S399 DEH060 p.1; oem_spec
Breaker compatibility	SG	A	S143 p.11-44; oem_spec
Kit contents	Hardware items of DEH060 Table 1 (fasteners) - exact subset not itemised	C	S399 DEH060 p.1; inference
OEM instruction document	DEH060	A	S399 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	kit_contents (itemised), Material, Status		

EDH-GEA-00197	AHKBQ1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)

OEM part number	AHKBQ1	A	S143 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	THQD	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00185	AHKE1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKE1

OEM part number	AHKE1	A	S143 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S403 p.1; oem_spec
	empower: "MOUNTING HARDWARE KIT THLC1 E-FRMS" (UPC 783175056774)	A	S426 empower page AHKE1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	S403 p.1; oem_spec
Breaker compatibility	For AMC modules: AMC6EB, AMC4SE, AMC4EB, AMC6EBS (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S143 p.11-44; oem_spec
	E-frame (TEB/TED/THED; SE) (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S403 p.1; inference
Fasteners	Line-end mounting screw #8-32 x 2-3/4 in round head (torque cell not legible/merged); load-end mounting screw (not shown) (torque cell not legible/merged) (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S403 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw #8-32 x 2-3/4 in round head (torque cell not legible/merged); load-end mounting screw (not shown) (torque cell not legible/merged) (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S403 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S143 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

EDH-GEA-00186	AHKEL1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKEL1

OEM part number	AHKEL1	A	S143 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S403 p.1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	same as above
Breaker compatibility	For AMC modules: AMC6EL (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S143 p.11-44; oem_spec
	TEL / E-frame with limiter (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S403 p.1; inference
Fasteners	Line-end mounting screw #10-32 x 1/2 in pan head 27-32 in-lb; load-end mounting screw #8-32 x 2-1/2 in round head 16-20 in-lb (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S403 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw #10-32 x 1/2 in pan head 27-32 in-lb; load-end mounting screw #8-32 x 2-1/2 in round head 16-20 in-lb (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S403 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S143 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

EDH-GEA-00187	AHKF1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKF1

OEM part number	AHKF1	A	S143 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S403 p.1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	same as above
Breaker compatibility	For AMC modules: AMC2FLS, AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC3FLS, AMC4FLS (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S143 p.11-44; oem_spec
	F-frame (TFJ/TFK/THFK/TFL, SF) (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S403 p.1; inference
Fasteners	Line-end mounting screw 1/4-20 x 3/4 in hex head 40-50 in-lb; load-end mounting screw #10-32 x 3-3/4 in pan head (torque cell not legible/merged) (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S403 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw 1/4-20 x 3/4 in hex head 40-50 in-lb; load-end mounting screw #10-32 x 3-3/4 in pan head (torque cell not legible/merged) (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S403 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S143 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

EDH-GEA-00192	AHKFD1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKFD1

OEM part number	AHKFD1	A	S143 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: FCS/FCV/FCN/FCH/FCL modules (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S143 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00193	AHKFG1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKFG1

OEM part number	AHKFG1	A	S143 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: FGV/FGN/FGH/FGP modules (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S143 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00188	AHKG1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKG1

OEM part number	AHKG1	A	S143 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S403 p.1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	same as above
Breaker compatibility	For AMC modules: AMC2GM, AMC6GB, AMC4GB, AMC3GM (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S143 p.11-44; oem_spec
	G-frame (SG) (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S403 p.1; inference
Fasteners	Line-end mounting screw 5/16-18 x 1 in hex head (torque cell not legible/merged); load-end mounting screw #10-32 x 3 in round head 27-32 in-lb (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S403 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw 5/16-18 x 1 in hex head (torque cell not legible/merged); load-end mounting screw #10-32 x 3 in round head 27-32 in-lb (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S403 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S143 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

EDH-GEA-00189	AHKJ1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKJ1

OEM part number	AHKJ1	A	S143 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S403 p.1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	same as above
Breaker compatibility	For AMC modules: AMC2JK, AMC6JK, AMC4JK, AMC3JK (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S143 p.11-44; oem_spec
	J-frame (TJD/TJJ/TJK/THJK) (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S403 p.1; inference
Fasteners	Line-end mounting screw 5/16-18 hex nut (nut-washer assembly) 70-110 in-lb; load-end mounting screw 1/4-20 x 1-1/2 in round head 40-50 in-lb (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S403 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw 5/16-18 hex nut (nut-washer assembly) 70-110 in-lb; load-end mounting screw 1/4-20 x 1-1/2 in round head 40-50 in-lb (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S403 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S143 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

EDH-GEA-00190	AHKLB1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKLB1

OEM part number	AHKLB1	A	S143 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S403 p.1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	same as above
Breaker compatibility	For AMC modules: AMC3LB, AMC6LB (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S143 p.11-44; oem_spec
	LB (SKP-type) frame (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S403 p.1; inference
Fasteners	Line-end mounting screw 1/4-20 x 1 in socket head (torque cell not legible/merged); load-end mounting screw #10-32 x 2-3/4 in pan head (torque cell not legible/merged) (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S403 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw 1/4-20 x 1 in socket head (torque cell not legible/merged); load-end mounting screw #10-32 x 2-3/4 in pan head (torque cell not legible/merged) (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S403 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S143 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

EDH-GEA-00191	AHKQ1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKQ1

OEM part number	AHKQ1	A	S143 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S403 p.1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	same as above
Breaker compatibility	For AMC modules: AMC4QD, AMC6QD (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S143 p.11-44; oem_spec
	Q-frame (TQD/THQD) (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S403 p.1; inference
Fasteners	Line-end mounting screw 1/4-20 x 3/4 in round head 40-50 in-lb; load-end mounting screw #10-32 x 2-3/4 in round head 27-32 in-lb (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S403 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw 1/4-20 x 3/4 in round head 40-50 in-lb; load-end mounting screw #10-32 x 2-3/4 in round head 27-32 in-lb (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S403 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S143 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00412	**192A6976P189**	GE Thread-forming screw #10-32 x 7/16 in - 192A6976P189	—	unknown
EDH-GEA-00415	**252B3613P1**	GE Antiturn clip (for 1/4-20 carriage bolt in square bus hole) - 252B3613P1	—	unknown
EDH-GEA-00438	**331A3329P2**	GE Steel drive rivet #10 x 1/2 in - 331A3329P2	—	unknown
EDH-GEA-00424	**75A105503P101**	GE Conical spring washer 1/4 in - 75A105503P101	—	unknown
EDH-GEA-00425	**75A105503P105**	GE Conical spring washer 5/16 in - 75A105503P105	—	unknown
EDH-GEA-00427	**N22P23012B6**	GE Hex-head bolt 5/16-18 x 3/4 in (breaker terminal to strap contact block) - N22P23012B6	—	unknown
EDH-GEA-00426	**N22P23016B6**	GE Hex-head bolt 3/8-16 x 1 in (breaker terminal to strap, G main kit) - N22P23016B6	—	unknown
EDH-GEA-00428	**N245P21B6**	GE Nut 1/4-20 - N245P21B6	—	unknown
EDH-GEA-00429	**N37P21060B6**	GE Screw 1/4-20 x 3-3/4 in (breaker to bracket) - N37P21060B6	—	unknown
EDH-GEA-00430	**N37P21969B6**	GE Machine screw 1/4-20 x 3-3/4 in (breaker to bracket) - N37P21969B6	—	unknown
EDH-GEA-00431	**N402P11B6**	GE Flat washer 1/4 in - N402P11B6	—	unknown
EDH-GEA-00432	**N657P21024B6**	GE Carriage bolt 1/4-20 x 1-1/2 in (strap to vertical bus) - N657P21024B6	—	unknown
EDH-GEA-00439	**N722EP16006B6**	GE Thread-forming screw 10-32 x 3/8 in - N722EP16006B6	—	unknown
EDH-GEA-00433	**N730BP1308B6**	GE Thread-forming screw #6 x 1/2 in (terminal cover) - N730BP1308B6	—	unknown

EDH-GEA-00412	192A6976P189	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Thread-forming screw #10-32 x 7/16 in - 192A6976P189

OEM part number	192A6976P189	A	S399, S402 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Thread-forming screw #10-32 x 7/16 in	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB2GM/3GM; 4 per AMCB4GB/6GB; 2 in ADF deadfront hardware kit 10085396G1	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00415	252B3613P1	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Antiturn clip (for 1/4-20 carriage bolt in square bus hole) - 252B3613P1

OEM part number	252B3613P1	A	S399, S402 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Antiturn clip (for 1/4-20 carriage bolt in square bus hole)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB2GM 4, AMCB3GM 6, AMCB4GB 2, AMCB6GB 3	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00438	331A3329P2	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Steel drive rivet #10 x 1/2 in - 331A3329P2

OEM part number	331A3329P2	A	S156 p.1 Table 1; oem_spec
Description	Steel drive rivet #10 x 1/2 in	A	same as above
Installation location	Spectra APNB bolt-on interior, TED6 breaker with TEDL current limiter, 3X (4.125 in) vertical space	A	S156 p.1; oem_spec
Kit contents	Qty 2 in circuit breaker cover kit AMCB6TEDL	A	S156 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Material		

EDH-GEA-00424	75A105503P101	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Conical spring washer 1/4 in - 75A105503P101

OEM part number	75A105503P101	A	S399, S402 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Conical spring washer 1/4 in	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB2GM 4, AMCB3GM 6, AMCB4GB 4, AMCB6GB 4	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00425	75A105503P105	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Conical spring washer 5/16 in - 75A105503P105

OEM part number	75A105503P105	A	S399, S402 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Conical spring washer 5/16 in	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB2GM 2, AMCB3GM 3, AMCB4GB 4, AMCB6GB 6	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00427	N22P23012B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Hex-head bolt 5/16-18 x 3/4 in (breaker terminal to strap contact block) - N22P23012B6

OEM part number	N22P23012B6	A	S402 DEH40129 p.1 Table 1; oem_spec
Description	Hex-head bolt 5/16-18 x 3/4 in (breaker terminal to strap contact block)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB4GB 4, AMCB6GB 6	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00426	N22P23016B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Hex-head bolt 3/8-16 x 1 in (breaker terminal to strap, G main kit) - N22P23016B6

OEM part number	N22P23016B6	A	S399 DEH060 p.1 Table 1; oem_spec
Description	Hex-head bolt 3/8-16 x 1 in (breaker terminal to strap, G main kit)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB2GM 2, AMCB3GM 3	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00428	N245P21B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Nut 1/4-20 - N245P21B6

OEM part number	N245P21B6	A	S399, S402 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Nut 1/4-20	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB2GM 4, AMCB3GM 6, AMCB4GB 2, AMCB6GB 3	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00429	N37P21060B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Screw 1/4-20 x 3-3/4 in (breaker to bracket) - N37P21060B6

OEM part number	N37P21060B6	A	S399 DEH060 p.1 Table 1; oem_spec
Description	Screw 1/4-20 x 3-3/4 in (breaker to bracket)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB2GM/AMCB3GM	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00430	N37P21969B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Machine screw 1/4-20 x 3-3/4 in (breaker to bracket) - N37P21969B6

OEM part number	N37P21969B6	A	S402 DEH40129 p.1 Table 1; oem_spec
Description	Machine screw 1/4-20 x 3-3/4 in (breaker to bracket)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 4 per AMCB4GB/AMCB6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00431	N402P11B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Flat washer 1/4 in - N402P11B6

OEM part number	N402P11B6	A	S399, S402 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Flat washer 1/4 in	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB2GM/3GM; 4 per AMCB4GB/6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00432	N657P21024B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Carriage bolt 1/4-20 x 1-1/2 in (strap to vertical bus) - N657P21024B6

OEM part number	N657P21024B6	A	S399, S402 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Carriage bolt 1/4-20 x 1-1/2 in (strap to vertical bus)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB2GM 4, AMCB3GM 6, AMCB4GB 2, AMCB6GB 3	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00439	N722EP16006B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Thread-forming screw 10-32 x 3/8 in - N722EP16006B6

OEM part number	N722EP16006B6	A	S156 p.1 Table 1; oem_spec
Description	Thread-forming screw 10-32 x 3/8 in	A	same as above
Installation location	Spectra APNB bolt-on interior, TED6 breaker with TEDL current limiter, 3X (4.125 in) vertical space	A	S156 p.1; oem_spec
Kit contents	Qty 2 in circuit breaker cover kit AMCB6TEDL	A	S156 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Material		

EDH-GEA-00433	N730BP1308B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Thread-forming screw #6 x 1/2 in (terminal cover) - N730BP1308B6

OEM part number	N730BP1308B6	A	S399, S402 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Thread-forming screw #6 x 1/2 in (terminal cover)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB2GM/3GM; 4 per AMCB4GB/6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00552	**SRFB3XT4FPK**	Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPK	Tmax XT4 (replaces legacy Spectra F frame breaker position) **A**	current (ABB retrofit offering)
EDH-GEA-00551	**SRFB3XT4FPX**	Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPX	Tmax XT4 (replaces legacy Spectra F frame breaker position) **A**	current (ABB retrofit offering)
EDH-GEA-00556	**SRFB3XT5MFPK**	Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPK	Tmax XT5 (replaces legacy Spectra G frame breaker position) **A**	current (ABB retrofit offering)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00555	**SRFB3XT5MFPX**	Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPX	Tmax XT5 (replaces legacy Spectra G frame breaker position) **A**	current (ABB retrofit offering)
EDH-GEA-00558	**SRFB3XT7MFPK**	Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPK	Tmax XT7 (replaces legacy Spectra K frame breaker position) **A**	current (ABB retrofit offering)
EDH-GEA-00557	**SRFB3XT7MFPX**	Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPX	Tmax XT7 (replaces legacy Spectra K frame breaker position) **A**	current (ABB retrofit offering)
EDH-GEA-00548	**SRFB6XT1FPK**	Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPK	Tmax XT1 (replaces legacy Spectra E frame breaker position) **A**	current (ABB retrofit offering)
EDH-GEA-00547	**SRFB6XT1FPX**	Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPX	Tmax XT1 (replaces legacy Spectra E frame breaker position) **A**	current (ABB retrofit offering)
EDH-GEA-00550	**SRFB6XT4FPK**	Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPK	Tmax XT4 (replaces legacy Spectra F frame breaker position) **A**	current (ABB retrofit offering)
EDH-GEA-00549	**SRFB6XT4FPX**	Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPX	Tmax XT4 (replaces legacy Spectra F frame breaker position) **A**	current (ABB retrofit offering)
EDH-GEA-00554	**SRFB6XT5BFPK**	Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPK	Tmax XT5 (replaces legacy Spectra G frame breaker position) **A**	current (ABB retrofit offering)
EDH-GEA-00553	**SRFB6XT5BFPX**	Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPX	Tmax XT5 (replaces legacy Spectra G frame breaker position) **A**	current (ABB retrofit offering)

EDH-GEA-00552 — SRFB3XT4FPK

GE / ABB lineage · conversion-kit · **CURRENT (ABB RETROFIT**

Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPK

OEM part number	SRFB3XT4FPK	**A**	S427 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB3FJFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	**A**	S427 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT4, 250 A with Kirk lock provision; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	**A**	S427 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	**A**	S427 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT4 (replaces legacy Spectra F frame breaker position)	**A**	S427 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	**B**	S427 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	**A**	S427 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00551	SRFB3XT4FPX	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPX

OEM part number	SRFB3XT4FPX	A	S427 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB3FJFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S427 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT4, 250 A; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S427 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S427 guide pp.28-30; oem_spec
	ABB: Tmax XT retrofit kits allow legacy GE Spectra breakers installed in Spectra panelboards and switchboards to be upgraded; customers 'can maintain the UL listing of their equipment without additional charges' (OEM page via search extract)	B	S634 oem_spec
Breaker compatibility	Tmax XT4 (replaces legacy Spectra F frame breaker position)	A	S427 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S427 guide p.27; oem_spec
Replacement / successor	ABB eCatalog cross reference pairs SRFB3XT4FPX with e.g. XT4SQ3100EFF000XXX (Ekip LS/I, 35 kA) replacing Spectra SEL 100 A frame (rating plug SRPE100A80), and XT4LU3225GFF000XXX replacing Spectra SGH 225 A (OEM eCatalog read via search-engine extract (site 503); upgrade to A on direct read)	B	S634 oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S427 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00556	SRFB3XT5MFPK	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPK

OEM part number	SRFB3XT5MFPK	A	S427 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB3GMFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S427 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT5, 600 A with Kirk lock provision; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S427 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S427 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT5 (replaces legacy Spectra G frame breaker position)	A	S427 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S427 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S427 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00555	SRFB3XT5MFPX	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPX

OEM part number	SRFB3XT5MFPX	A	S427 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB3GMFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S427 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT5, 600 A; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S427 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S427 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT5 (replaces legacy Spectra G frame breaker position)	A	S427 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S427 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S427 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00558	SRFB3XT7MFPK	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPK

OEM part number	SRFB3XT7MFPK	A	S427 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB3KMFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S427 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT7, 1200 A with Kirk lock provision; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S427 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side; XT7 kit includes breaker handle extension/folding handle	A	S427 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT7 (replaces legacy Spectra K frame breaker position)	A	S427 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S427 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S427 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00557	SRFB3XT7MFPX	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPX

OEM part number	SRFB3XT7MFPX	A	S427 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB3KMFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S427 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT7, 1200 A; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S427 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side; XT7 kit includes breaker handle extension/folding handle	A	S427 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT7 (replaces legacy Spectra K frame breaker position)	A	S427 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S427 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S427 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00548	SRFB6XT1FPK	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPK

OEM part number	SRFB6XT1FPK	A	S427 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB6EBFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S427 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT1, 125 A with Kirk lock provision; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S427 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S427 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT1 (replaces legacy Spectra E frame breaker position)	A	S427 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S427 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S427 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00547	SRFB6XT1FPX	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPX

OEM part number	SRFB6XT1FPX	A	S427 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB6EBFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S427 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT1, 125 A; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S427 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S427 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT1 (replaces legacy Spectra E frame breaker position)	A	S427 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S427 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S427 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00550	SRFB6XT4FPK	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPK

OEM part number	SRFB6XT4FPK	A	S427 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB6FJFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S427 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT4, 250 A with Kirk lock provision; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S427 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S427 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT4 (replaces legacy Spectra F frame breaker position)	A	S427 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S427 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S427 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00549	SRFB6XT4FPX	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPX

OEM part number	SRFB6XT4FPX	A	S427 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB6FJFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S427 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT4, 250 A; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S427 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S427 guide pp.28-30; oem_spec
	ABB: Tmax XT retrofit kits allow legacy GE Spectra breakers installed in Spectra panelboards and switchboards to be upgraded; customers 'can maintain the UL listing of their equipment without additional charges' (OEM page via search extract)	B	S634 oem_spec
Breaker compatibility	Tmax XT4 (replaces legacy Spectra F frame breaker position)	A	S427 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S427 guide p.27; oem_spec
Replacement / successor	ABB eCatalog 'Spectra to Tmax XT Smart Cross Reference' pairs SRFB6XT4FPX with Tmax XT4 TMF breakers, e.g. XT4VU3100BFF000XXX (250 A frame, 65 kA), XT4VU3025AFF000XXX, XT4VU3050AFF000XXX (OEM eCatalog read via search-engine extract (site 503); upgrade to A on direct read)	B	S634 oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S427 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00554	SRFB6XT5BFPK	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPK

OEM part number	SRFB6XT5BFPK	A	S427 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB6GBFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S427 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT5, 600 A with Kirk lock provision; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S427 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S427 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT5 (replaces legacy Spectra G frame breaker position)	A	S427 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S427 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S427 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00553	SRFB6XT5BFPX	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPX

OEM part number	SRFB6XT5BFPX	A	S427 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB6GBFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S427 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT5, 600 A; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S427 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S427 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT5 (replaces legacy Spectra G frame breaker position)	A	S427 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S427 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S427 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

Spd Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00546	**ATHMEGNDN**	Spectra TVSS neutral & ground wire kit ATHMEGNDN	—	unknown

EDH-GEA-00546	ATHMEGNDN	GE / ABB lineage	spd-kit	STATUS UNKNOWN

Spectra TVSS neutral & ground wire kit ATHMEGNDN

OEM part number	ATHMEGNDN	A	S422 DEH40471 p.1; oem_spec
Description	Neutral and ground wire kit for Spectra TVSS units with catalog prefix ATME or ATHE	A	S422 p.1; oem_spec
Kit contents	#2-gauge black wire 273A7900P12BK19, 12.5 ft; tie wraps PEL#PLT1.5I-M (10); ground AEG10 (1)	A	S422 p.1 Table 1; oem_spec
Torque values	#2 Cu cable into TVSS Ground/Neutral lug hex screw 150 lb-in	A	S422 p.1 step 3; oem_spec
OEM instruction document	DEH40471 R02 (10/2001)	A	S422 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00497	**455C592P1**	GE Lug cover, TKM/THKM - 455C592P1	—	unknown
EDH-GEA-00498	**455C592P2**	GE Lug cover, TK4V/TKL4V - 455C592P2	—	unknown
EDH-GEA-00650	**SKHDLEXT**	GE replacement handle extension for SK1200	SK1200 A	unknown
EDH-GEA-00562	**SRFN100GF**	Spectra retrofit neutral CT kit SRFN100GF	—	unknown
EDH-GEA-00563	**SRFN120GF**	Spectra retrofit neutral CT kit SRFN120GF	—	unknown
EDH-GEA-00559	**SRFN400GF**	Spectra retrofit neutral CT kit SRFN400GF	—	unknown
EDH-GEA-00560	**SRFN600GF**	Spectra retrofit neutral CT kit SRFN600GF	—	unknown
EDH-GEA-00561	**SRFN800GF**	Spectra retrofit neutral CT kit SRFN800GF	—	unknown

EDH-GEA-00497	455C592P1	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

GE Lug cover, TKM/THKM - 455C592P1

OEM part number	455C592P1	A	S404 GEH5629 p.1; oem_spec
Description	Lug cover, TKM/THKM (furnished with AFP6SKS)	A	same as above
Application	TKM, THKM in Spectra K-frame module/bolt-on position	A	S404 GEH5629 p.1 Tables 1-2; oem_spec
Fasteners	placed on line and load ends of breaker	A	S404 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	Dimensions, Material		

EDH-GEA-00498	455C592P2	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

GE Lug cover, TK4V/TKL4V - 455C592P2

OEM part number	455C592P2	A	S404 GEH5629 p.1; oem_spec
Description	Lug cover, TK4V/TKL4V (furnished with AFP6SKS)	A	same as above
Application	TK4V, TKL4V	A	S404 GEH5629 p.1 Tables 1-2; oem_spec
Fasteners	placed on line and load ends of breaker	A	S404 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	Dimensions, Material		

EDH-GEA-00650	SKHDLEXT	GE	breaker-accessory	STATUS UNKNOWN

GE replacement handle extension for SK1200

OEM part number	SKHDLEXT	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Handle extension - replacement, SK1200.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SK1200	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra RMS SK1200		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00562	SRFN100GF	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

Spectra retrofit neutral CT kit SRFN100GF

OEM part number	SRFN100GF	A	S427 guide p.28; oem_spec
Description	Tmax XT Spectra panel neutral CT kit: XT7 UL 1000 A neutral current transformer kit	A	same as above
Application	Ground-fault neutral sensing for Tmax XT retrofit in Spectra panelboards	A	S427 guide pp.28-30; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document		

EDH-GEA-00563	SRFN120GF	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

Spectra retrofit neutral CT kit SRFN120GF

OEM part number	SRFN120GF	A	S427 guide p.28; oem_spec
Description	Tmax XT Spectra panel neutral CT kit: XT7 UL 1200 A neutral current transformer kit	A	same as above
Application	Ground-fault neutral sensing for Tmax XT retrofit in Spectra panelboards	A	S427 guide pp.28-30; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document		

EDH-GEA-00559	SRFN400GF	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

Spectra retrofit neutral CT kit SRFN400GF

OEM part number	SRFN400GF	A	S427 guide p.28; oem_spec
Description	Tmax XT Spectra panel neutral CT kit: XT5 UL 400 A neutral current transformer kit	A	same as above
Application	Ground-fault neutral sensing for Tmax XT retrofit in Spectra panelboards	A	S427 guide pp.28-30; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document		

EDH-GEA-00560	SRFN600GF	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

Spectra retrofit neutral CT kit SRFN600GF

OEM part number	SRFN600GF	A	S427 guide p.28; oem_spec
Description	Tmax XT Spectra panel neutral CT kit: XT5 UL 600 A neutral current transformer kit	A	same as above
Application	Ground-fault neutral sensing for Tmax XT retrofit in Spectra panelboards	A	S427 guide pp.28-30; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document		

EDH-GEA-00561	SRFN800GF	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

Spectra retrofit neutral CT kit SRFN800GF

OEM part number	SRFN800GF	A	S427 guide p.28; oem_spec
Description	Tmax XT Spectra panel neutral CT kit: XT7 UL 800 A neutral current transformer kit	A	same as above
Application	Ground-fault neutral sensing for Tmax XT retrofit in Spectra panelboards	A	S427 guide pp.28-30; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00649	**SBD1**	GE handle locking device (non-padlocking) for SE150	SE150, SF250 A	unknown

EDH-GEA-00649	SBD1	GE	handle-lock	STATUS UNKNOWN

GE handle locking device (non-padlocking) for SE150

OEM part number	SBD1	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Handle locking device (non-padlocking).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SE150, SF250	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra RMS SE150, Spectra RMS SF250		
Not yet documented	Dimensions, Material, Status		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00658	**FCPLD**	GE padlocking device (single padlock), FC frame	FCS, FCV, FCN, FCH, FCL, FCPF A	unknown
EDH-GEA-00657	**FG1PE**	GE padlocking EUSERC toggle, Record Plus FG 600	FG 600 A	unknown
EDH-GEA-00659	**FGPLD**	GE padlocking device (single padlock), FG frame	FGV, FGN, FGH, FGL, FGP, FGPF A	unknown
EDH-GEA-00640	**SEFPLD2**	GE EUSERC-approved padlocking device for SE150, SF250	SE150, SF250 (field installable per footnote) A	unknown
EDH-GEA-00634	**SEPLD**	GE standard padlocking device for SE150, SF250	SE150, SF250 (padlockable ON or OFF) A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00635	**SGPLD**	GE standard padlocking device for SG600	SG600 (padlockable ON or OFF) **A**	unknown
EDH-GEA-00641	**SGPLD2**	GE EUSERC-approved padlocking device for SG600	SG600 **A**	unknown
EDH-GEA-00636	**SKPLD**	GE standard padlocking device for SK1200	SK1200 (padlockable ON or OFF) **A**	unknown
EDH-GEA-00643	**SKPLD2**	GE EUSERC-approved padlocking device for SK1200	SK1200 **A**	unknown
EDH-GEA-00639	**TEDPLD2**	GE EUSERC-approved padlocking device for E150	E150 **A**	unknown
EDH-GEA-00632	**TJKPLD1**	GE standard padlocking device for J600 line	J600 line **A**	unknown
EDH-GEA-00642	**TJKPLD2**	GE EUSERC-approved padlocking device for J600	J600 **A**	unknown
EDH-GEA-00633	**TKMPLD1**	GE standard padlocking device for K1200 line	K1200 line **A**	unknown
EDH-GEA-00644	**TLC1PLD2**	GE EUSERC-approved padlocking device for THLC1	THLC1 **A**	unknown
EDH-GEA-00645	**TLC4PLD2**	GE EUSERC-approved padlocking device for THLC2/4	THLC2/4 **A**	unknown

EDH-GEA-00658	**FCPLD**	GE	padlock-attachment	**STATUS UNKNOWN**

GE padlocking device (single padlock), FC frame

OEM part number	FCPLD	**A**	S143 p. 11-30, Spectra Locking Devices; oem_spec
Description	Padlocking device (single padlock) for FCS, FCV, FCN, FCH, FCL, FCPF.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	FCS, FCV, FCN, FCH, FCL, FCPF	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC 100		
Not yet documented	Dimensions, Material, Status		
Open question	*Relation to FC1PF / FC1PE in Section 6?*		

EDH-GEA-00657	**FG1PE**	GE	padlock-attachment	**STATUS UNKNOWN**

GE padlocking EUSERC toggle, Record Plus FG 600

OEM part number	FG1PE	**A**	S198 p. 6-88; oem_spec
Description	Padlocking EUSERC toggle.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	FG 600	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG 600		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00659	**FGPLD**	GE	padlock-attachment	**STATUS UNKNOWN**

GE padlocking device (single padlock), FG frame

OEM part number	FGPLD	**A**	S143 p. 11-30, Spectra Locking Devices; oem_spec
Description	Padlocking device (single padlock) for FGV, FGN, FGH, FGL, FGP, FGPF.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	FGV, FGN, FGH, FGL, FGP, FGPF	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG 600		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00640	SEFPLD2	GE	padlock-attachment	STATUS UNKNOWN

GE EUSERC-approved padlocking device for SE150, SF250

OEM part number	SEFPLD2	**A**	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	EUSERC-approved padlocking device ("EUSERC Approved - Factory Installed Only"; SE150/SF250 SEFPLD2 footnoted as field installable).	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	SE150, SF250 (field installable per footnote)	**A**	same as above
Cross-links	Families: SPECTRA-PP, A-SERIES-PWR · Breakers: Spectra RMS SE150, Spectra RMS SF250		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00634	SEPLD	GE	padlock-attachment	STATUS UNKNOWN

GE standard padlocking device for SE150, SF250

OEM part number	SEPLD	**A**	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Standard padlocking device. Suitable for breakers used in group-mounted panelboard construction only, except J600, K1200, SE150/SF250, SG600 and SK1200 which screw down to the face of the breaker.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	SE150, SF250 (padlockable ON or OFF)	**A**	same as above
Cross-links	Families: SPECTRA-PP, A-SERIES-PWR · Breakers: Spectra RMS SE150, Spectra RMS SF250		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00635	SGPLD	GE	padlock-attachment	STATUS UNKNOWN

GE standard padlocking device for SG600

OEM part number	SGPLD	**A**	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Standard padlocking device. Suitable for breakers used in group-mounted panelboard construction only, except J600, K1200, SE150/SF250, SG600 and SK1200 which screw down to the face of the breaker.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	SG600 (padlockable ON or OFF)	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra RMS SG600		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00641	SGPLD2	GE	padlock-attachment	STATUS UNKNOWN

GE EUSERC-approved padlocking device for SG600

OEM part number	SGPLD2	**A**	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	EUSERC-approved padlocking device ("EUSERC Approved - Factory Installed Only"; SE150/SF250 SEFPLD2 footnoted as field installable).	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	SG600	**A**	same as above
Cross-links	Families: SPECTRA-PP, A-SERIES-PWR · Breakers: Spectra RMS SG600		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00636	SKPLD	GE	padlock-attachment	STATUS UNKNOWN

GE standard padlocking device for SK1200

OEM part number	SKPLD	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Standard padlocking device. Suitable for breakers used in group-mounted panelboard construction only, except J600, K1200, SE150/SF250, SG600 and SK1200 which screw down to the face of the breaker.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SK1200 (padlockable ON or OFF)	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra RMS SK1200		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00643	SKPLD2	GE	padlock-attachment	STATUS UNKNOWN

GE EUSERC-approved padlocking device for SK1200

OEM part number	SKPLD2	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	EUSERC-approved padlocking device ("EUSERC Approved - Factory Installed Only"; SE150/SF250 SEFPLD2 footnoted as field installable).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SK1200	A	same as above
Cross-links	Families: SPECTRA-PP, A-SERIES-PWR · Breakers: Spectra RMS SK1200		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00639	TEDPLD2	GE	padlock-attachment	STATUS UNKNOWN

GE EUSERC-approved padlocking device for E150

OEM part number	TEDPLD2	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	EUSERC-approved padlocking device ("EUSERC Approved - Factory Installed Only"; SE150/SF250 SEFPLD2 footnoted as field installable).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150	A	same as above
Cross-links	Families: SPECTRA-PP, A-SERIES-PWR · Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00632	TJKPLD1	GE	padlock-attachment	STATUS UNKNOWN

GE standard padlocking device for J600 line

OEM part number	TJKPLD1	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Standard padlocking device. Suitable for breakers used in group-mounted panelboard construction only, except J600, K1200, SE150/SF250, SG600 and SK1200 which screw down to the face of the breaker.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600 line	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00642	TJKPLD2	GE	padlock-attachment	STATUS UNKNOWN

GE EUSERC-approved padlocking device for J600

OEM part number	TJKPLD2	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	EUSERC-approved padlocking device ("EUSERC Approved - Factory Installed Only"; SE150/SF250 SEFPLD2 footnoted as field installable).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600	A	same as above
Cross-links	Families: SPECTRA-PP, A-SERIES-PWR · Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00633	TKMPLD1	GE	padlock-attachment	STATUS UNKNOWN

GE standard padlocking device for K1200 line

OEM part number	TKMPLD1	A	S198 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	Standard padlocking device. Suitable for breakers used in group-mounted panelboard construction only, except J600, K1200, SE150/SF250, SG600 and SK1200 which screw down to the face of the breaker.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200 line	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00644	TLC1PLD2	GE	padlock-attachment	STATUS UNKNOWN

GE EUSERC-approved padlocking device for THLC1

OEM part number	TLC1PLD2	A	S200 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	EUSERC-approved padlocking device ("EUSERC Approved - Factory Installed Only"; SE150/SF250 SEFPLD2 footnoted as field installable).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	THLC1	A	same as above
Cross-links	Families: SPECTRA-PP, A-SERIES-PWR · Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00645	TLC4PLD2	GE	padlock-attachment	STATUS UNKNOWN

GE EUSERC-approved padlocking device for THLC2/4

OEM part number	TLC4PLD2	A	S200 p. 6-100, External Accessories: Standard Padlocking Devices / Handle-Locking Devices; oem_spec
Description	EUSERC-approved padlocking device ("EUSERC Approved - Factory Installed Only"; SE150/SF250 SEFPLD2 footnoted as field installable).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	THLC2/4	A	same as above
Cross-links	Families: SPECTRA-PP, A-SERIES-PWR · Breakers: F225 line (TFJ, TFK, THFK, TFC), J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Material, Status		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00421	**252B3657P1**	GE Strap spacer, G-frame bolt-on - 252B3657P1	—	unknown
EDH-GEA-00422	**252B3657P2**	GE Strap spacer, G-frame bolt-on - 252B3657P2	—	unknown
EDH-GEA-00821	**331A1519G1**	GE Spectra ADS switch replacement load base kit 331A1519G1	—	unknown
EDH-GEA-00834	**331A1519G10**	GE Spectra ADS switch replacement load base kit 331A1519G10	—	unknown
EDH-GEA-00837	**331A1519G11**	GE Spectra ADS switch replacement load base kit 331A1519G11	—	unknown
EDH-GEA-00829	**331A1519G12**	GE Spectra ADS switch replacement load base kit 331A1519G12	—	unknown
EDH-GEA-00838	**331A1519G13**	GE Spectra ADS switch replacement load base kit 331A1519G13	—	unknown
EDH-GEA-00835	**331A1519G14**	GE Spectra ADS switch replacement load base kit 331A1519G14	—	unknown
EDH-GEA-00839	**331A1519G15**	GE Spectra ADS switch replacement load base kit 331A1519G15	—	unknown
EDH-GEA-00830	**331A1519G16**	GE Spectra ADS switch replacement load base kit 331A1519G16	—	unknown
EDH-GEA-00840	**331A1519G17**	GE Spectra ADS switch replacement load base kit 331A1519G17	—	unknown
EDH-GEA-00836	**331A1519G18**	GE Spectra ADS switch replacement load base kit 331A1519G18	—	unknown
EDH-GEA-00841	**331A1519G19**	GE Spectra ADS switch replacement load base kit 331A1519G19	—	unknown
EDH-GEA-00822	**331A1519G2**	GE Spectra ADS switch replacement load base kit 331A1519G2	—	unknown
EDH-GEA-00831	**331A1519G20**	GE Spectra ADS switch replacement load base kit 331A1519G20	—	unknown
EDH-GEA-00842	**331A1519G21**	GE Spectra ADS switch replacement load base kit 331A1519G21	—	unknown
EDH-GEA-00832	**331A1519G22**	GE Spectra ADS switch replacement load base kit 331A1519G22	—	unknown
EDH-GEA-00823	**331A1519G3**	GE Spectra ADS switch replacement load base kit 331A1519G3	—	unknown
EDH-GEA-00824	**331A1519G4**	GE Spectra ADS switch replacement load base kit 331A1519G4	—	unknown
EDH-GEA-00825	**331A1519G5**	GE Spectra ADS switch replacement load base kit 331A1519G5	—	unknown
EDH-GEA-00826	**331A1519G6**	GE Spectra ADS switch replacement load base kit 331A1519G6	—	unknown
EDH-GEA-00827	**331A1519G7**	GE Spectra ADS switch replacement load base kit 331A1519G7	—	unknown
EDH-GEA-00828	**331A1519G8**	GE Spectra ADS switch replacement load base kit 331A1519G8	—	unknown
EDH-GEA-00833	**331A1519G9**	GE Spectra ADS switch replacement load base kit 331A1519G9	—	unknown
EDH-GEA-00851	**331A1543G1**	GE Spectra ADS switch handle kit 331A1543G1 (400-1200 A)	—	Listed in ABB eCatalog (2026-10-21)
EDH-GEA-00843	**331A1545G1**	GE Spectra ADS switch replacement load base kit 331A1545G1	—	unknown
EDH-GEA-00847	**331A1545G2**	GE Spectra ADS switch replacement load base kit 331A1545G2	—	unknown
EDH-GEA-00844	**331A1545G3**	GE Spectra ADS switch replacement load base kit 331A1545G3	—	unknown
EDH-GEA-00848	**331A1545G4**	GE Spectra ADS switch replacement load base kit 331A1545G4	—	unknown
EDH-GEA-00845	**331A1545G5**	GE Spectra ADS switch replacement load base kit 331A1545G5	—	unknown
EDH-GEA-00849	**331A1545G6**	GE Spectra ADS switch replacement load base kit 331A1545G6	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00846	**331A1545G7**	GE Spectra ADS switch replacement load base kit 331A1545G7	—	unknown
EDH-GEA-00850	**331A1545G8**	GE Spectra ADS switch replacement load base kit 331A1545G8	—	unknown
EDH-GEA-00542	**APN49**	Spectra permanent circuit marker kit APN49	—	unknown
EDH-GEA-00543	**APN99**	Spectra permanent circuit marker kit APN99	—	unknown

EDH-GEA-00421 **252B3657P1** GE / ABB lineage other **STATUS UNKNOWN**

GE Strap spacer, G-frame bolt-on - 252B3657P1

OEM part number	252B3657P1	**A**	S399 DEH060 p.1 Table 1; oem_spec
Description	Strap spacer, G-frame bolt-on	**A**	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	**A**	same as above
Kit contents	Supplied in kits: 1 per AMCB2GM/AMCB3GM (used when cable connection is opposite the 2.75 in reference side)	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00422 **252B3657P2** GE / ABB lineage other **STATUS UNKNOWN**

GE Strap spacer, G-frame bolt-on - 252B3657P2

OEM part number	252B3657P2	**A**	S399 DEH060 p.1 Table 1; oem_spec
Description	Strap spacer, G-frame bolt-on	**A**	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	**A**	same as above
Kit contents	Supplied in kits: 2 per AMCB2GM/AMCB3GM (cable connection opposite the 2.75 in side)	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00821 **331A1519G1** GE other **STATUS UNKNOWN**

GE Spectra ADS switch replacement load base kit 331A1519G1

OEM part number	331A1519G1	**A**	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - replaces load base of switch ADS22030HD	**A**	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Kit contents	Load base, clips and lugs	**A**	S650 9-111; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		

EDH-GEA-00834	331A1519G10	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G10

OEM part number	331A1519G10	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 100 A, 3-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	3	A	S650 9-111; oem_spec
Current rating	100 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00837	331A1519G11	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G11

OEM part number	331A1519G11	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 200 A, 3-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	3	A	S650 9-111; oem_spec
Current rating	200 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00829	331A1519G12	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G12

OEM part number	331A1519G12	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - replaces load base of switch ADS36200JD	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Kit contents	Load base, clips and lugs	A	S650 9-111; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		

EDH-GEA-00838	331A1519G13	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G13

OEM part number	331A1519G13	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 200 A, 2-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	2	A	S650 9-111; oem_spec
Current rating	200 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00835	331A1519G14	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G14

OEM part number	331A1519G14	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 100 A, 3-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	3	A	S650 9-111; oem_spec
Current rating	100 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00839	331A1519G15	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G15

OEM part number	331A1519G15	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 200 A, 2-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	2	A	S650 9-111; oem_spec
Current rating	200 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00830	331A1519G16	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G16

OEM part number	331A1519G16	**A**	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - replaces load base of switch ADS26200JD	**A**	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Kit contents	Load base, clips and lugs	**A**	S650 9-111; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		

EDH-GEA-00840	331A1519G17	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G17

OEM part number	331A1519G17	**A**	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 200 A, 2-pole, 240 V & 600 V	**A**	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	2	**A**	S650 9-111; oem_spec
Current rating	200 A	**A**	same as above
Kit contents	Load base, clips and lugs	**A**	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00836	331A1519G18	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G18

OEM part number	331A1519G18	**A**	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 100 A, 2-pole, 240 V & 600 V	**A**	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	2	**A**	S650 9-111; oem_spec
Current rating	100 A	**A**	same as above
Kit contents	Load base, clips and lugs	**A**	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00841	331A1519G19	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G19

OEM part number	331A1519G19	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 200 A, 3-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	3	A	S650 9-111; oem_spec
Current rating	200 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00822	331A1519G2	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G2

OEM part number	331A1519G2	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - replaces load base of switch ADS32030HD	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Kit contents	Load base, clips and lugs	A	S650 9-111; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		

EDH-GEA-00831	331A1519G20	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G20

OEM part number	331A1519G20	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - replaces load base of switch ADS36200JM	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Kit contents	Load base, clips and lugs	A	S650 9-111; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		

EDH-GEA-00842	331A1519G21	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G21

OEM part number	331A1519G21	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 200 A, 2-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	2	A	S650 9-111; oem_spec
Current rating	200 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00832	331A1519G22	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G22

OEM part number	331A1519G22	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - replaces load base of switch ADS26200JM	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Kit contents	Load base, clips and lugs	A	S650 9-111; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		

EDH-GEA-00823	331A1519G3	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G3

OEM part number	331A1519G3	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - replaces load base of switch ADS32060HD (printed "ADS322060HD")	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Kit contents	Load base, clips and lugs	A	S650 9-111; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Table prints "ADS322060HD" for G3 and "ADS32060HD" for G4 - one is a misprint (possibly ADS22060HD).*		

EDH-GEA-00824	331A1519G4	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G4

OEM part number	331A1519G4	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - replaces load base of switch ADS32060HD	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Kit contents	Load base, clips and lugs	A	S650 9-111; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		

EDH-GEA-00825	331A1519G5	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G5

OEM part number	331A1519G5	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - replaces load base of switch ADS26030HD	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Kit contents	Load base, clips and lugs	A	S650 9-111; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		

EDH-GEA-00826	331A1519G6	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G6

OEM part number	331A1519G6	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - replaces load base of switch ADS36030HD	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Kit contents	Load base, clips and lugs	A	S650 9-111; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		

EDH-GEA-00827	331A1519G7	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G7

OEM part number	331A1519G7	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - replaces load base of switch ADS26060HD	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Kit contents	Load base, clips and lugs	A	S650 9-111; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		

EDH-GEA-00828	331A1519G8	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G8

OEM part number	331A1519G8	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - replaces load base of switch ADS36060HD	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Kit contents	Load base, clips and lugs	A	S650 9-111; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		

EDH-GEA-00833	331A1519G9	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1519G9

OEM part number	331A1519G9	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 100 A, 2-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	2	A	S650 9-111; oem_spec
Current rating	100 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00851	331A1543G1	GE	other	LISTED IN ABB ECATALOG

GE Spectra ADS switch handle kit 331A1543G1 (400-1200 A)

OEM part number	331A1543G1	A	S650 9-111; oem_spec
Description	ABB eCatalog: "HANDLE KIT 400-1200 AMP" (UPC 783164011630)	A	S426 oem_spec
	Listed (400-1200 A, no pole/voltage given) at the foot of the 2008 "ADS Switch Replacement Load Base Kits" table (row placement suggests load base, but ABB description and GEH-5553 (Handle Replacement: 400-1200 Ampere Switches) indicate a handle kit)	A	S650 9-111; oem_spec
Current rating	400-1200 A	A	same as above
OEM instruction document	GEH-5553 Handle Replacement: 400-1200 Ampere Switches	B	S650 9-118; inference
Status	Listed in ABB eCatalog (2026-10-21)	A	S426 oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*BuyLog 2008 places 331A1543G1 in the load-base table; ABB eCatalog calls it a handle kit - confirm.*		

EDH-GEA-00843	331A1545G1	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1545G1

OEM part number	331A1545G1	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 400 A, 2-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	2	A	S650 9-111; oem_spec
Current rating	400 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
OEM instruction document	GEH-5576 (Load Base Replacement for Type ADS 400-600 Ampere Switches) (publication list; not tied to individual numbers)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00847	331A1545G2	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1545G2

OEM part number	331A1545G2	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 600 A, 2-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	2	A	S650 9-111; oem_spec
Current rating	600 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
OEM instruction document	GEH-5576 (Load Base Replacement for Type ADS 400-600 Ampere Switches) (publication list; not tied to individual numbers)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00844	331A1545G3	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1545G3

OEM part number	331A1545G3	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 400 A, 3-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	3	A	S650 9-111; oem_spec
Current rating	400 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
OEM instruction document	GEH-5576 (Load Base Replacement for Type ADS 400-600 Ampere Switches) (publication list; not tied to individual numbers)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00848	331A1545G4	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1545G4

OEM part number	331A1545G4	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 600 A, 3-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	3	A	S650 9-111; oem_spec
Current rating	600 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
OEM instruction document	GEH-5576 (Load Base Replacement for Type ADS 400-600 Ampere Switches) (publication list; not tied to individual numbers)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00845	331A1545G5	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1545G5

OEM part number	331A1545G5	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 400 A, 2-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	2	A	S650 9-111; oem_spec
Current rating	400 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
OEM instruction document	GEH-5576 (Load Base Replacement for Type ADS 400-600 Ampere Switches) (publication list; not tied to individual numbers)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00849	331A1545G6	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1545G6

OEM part number	331A1545G6	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 600 A, 2-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	2	A	S650 9-111; oem_spec
Current rating	600 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
OEM instruction document	GEH-5576 (Load Base Replacement for Type ADS 400-600 Ampere Switches) (publication list; not tied to individual numbers)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00846	331A1545G7	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1545G7

OEM part number	331A1545G7	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 400 A, 3-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	3	A	S650 9-111; oem_spec
Current rating	400 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
OEM instruction document	GEH-5576 (Load Base Replacement for Type ADS 400-600 Ampere Switches) (publication list; not tied to individual numbers)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00850	331A1545G8	GE	other	STATUS UNKNOWN

GE Spectra ADS switch replacement load base kit 331A1545G8

OEM part number	331A1545G8	A	S650 9-111; oem_spec
Description	Replacement load base kit for Spectra ADS fusible switch (includes load base, clips and lugs) - 600 A, 3-pole, 240 V & 600 V	A	S650 9-111 "Mounting Hardware Plug-In or Bolt-On Spectra ADS Switch Replacement Load Base Kits"; oem_spec
Poles	3	A	S650 9-111; oem_spec
Current rating	600 A	A	same as above
Kit contents	Load base, clips and lugs	A	same as above
OEM instruction document	GEH-5576 (Load Base Replacement for Type ADS 400-600 Ampere Switches) (publication list; not tied to individual numbers)	B	S650 9-118; oem_spec
Cross-links	Families: SPECTRA-PP, SPECTRA-SB		
Not yet documented	Dimensions, fuse class, Material		
Open question	*Several 331A1519/331A1545 groups share the same rating (e.g. G9/G18, G11/G19, G1/G5 prices); the distinguishing switch type (fuse class H/J/T, old/new style) is not stated in the 2008 table.*		

EDH-GEA-00542	APN49	GE / ABB lineage	other	STATUS UNKNOWN

Spectra permanent circuit marker kit APN49

OEM part number	APN49	A	S424 GEH5598 p.1; oem_spec
Description	Spectra permanent circuit marker kit, numbers 1-49	A	S424 p.1; oem_spec
Application	Strip selection by interior height (X = 1-3/8 in): 13X P3; 18X P1+P3; 23X P2+P3; 28X P1+P2+P3; 33X P2+P3; 38X P1+P2+P3; 43X P2+P3; 48X P1+P2+P3; 53X P2+P3 (two each)	A	S424 p.1 Table 2; oem_spec
Kit contents	Marker strips 252B1679P1 (5X, 10 circuits) x2, 252B1679P2 (10X, 20 circuits) x2, 252B1679P3 (13X, 26 circuits) x2; thread-forming screws N605P13005B #6-32 x 5/16 (24); permanent marker tabs 264V287P1-49	A	S424 p.1 Table 1; oem_spec
Mounting-hole pattern	Drill 0.120 in (#31 drill) hole at each end of the marker strip using the strip as template; strips fixed to front shield with #6-32 pan-head thread-forming screws	A	S424 p.1; oem_spec
OEM instruction document	GEH5598 R02 (05/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		

EDH-GEA-00543	APN99	GE / ABB lineage	other	STATUS UNKNOWN

Spectra permanent circuit marker kit APN99

OEM part number	APN99	A	S424 GEH5598 p.1; oem_spec
Description	Spectra permanent circuit marker kit, numbers 1-99	A	S424 p.1; oem_spec
Application	Strip selection by interior height (X = 1-3/8 in): 13X P3; 18X P1+P3; 23X P2+P3; 28X P1+P2+P3; 33X P2+P3; 38X P1+P2+P3; 43X P2+P3; 48X P1+P2+P3; 53X P2+P3 (two each)	A	S424 p.1 Table 2; oem_spec
Kit contents	Marker strips 252B1679P1 (5X, 10 circuits) x2, 252B1679P2 (10X, 20 circuits) x2, 252B1679P3 (13X, 26 circuits) x2; thread-forming screws N605P13005B #6-32 x 5/16 (24); permanent marker tabs 264V287P1-99	A	S424 p.1 Table 1; oem_spec
Mounting-hole pattern	Drill 0.120 in (#31 drill) hole at each end of the marker strip using the strip as template; strips fixed to front shield with #6-32 pan-head thread-forming screws	A	S424 p.1; oem_spec
OEM instruction document	GEH5598 R02 (05/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		

5.12 TRUMBULL — Trumbull Electric (Plainville CT) panelboards and switches

FAM-GEA-010 · panelboard · aka Trumbell (misspelling), GE-Trumbull · markings: Trumbull, Trumbull Electric Mfg. Co., A General Electric Organization

Trumbull Electric was GE's panelboard/switch maker before GE-branded distribution products; later Trumbull panels accept GE breakers per labels. Coded GEA per lineage. No Trumbull hardware part numbers were found.

Attribute	Value	Cl.	Sources
Status	Obsolete; forum states GE and Trumbull breakers share part numbers (e.g., TQL/THQL)	D	S226 forum
Era of manufacture	Trumbull Electric Mfg. Co., Plainville CT, labelled 'A General Electric Organization'; split-bus panels into early 1960s	C	same as above
Successor	General Electric (GE Industrial -> ABB 2018)	C	same as above
Branch breakers accepted	GE-type plug-in (TQL/THQL family) in later panels; ATB-type breakers reported in older Trumbull switchboards (not in SKM library)	D	same as above

Key documents: S226 Trumbull Electric panel / GE-Trumbull discussions

5.13 AV-LINE — AV-Line switchboards (legacy)

FAM-GEA-009 · switchboard · aka AV Line, AV-1, AV-2, AV-Line, AV1, AV2 · markings: General Electric
Legacy GE distribution switchboard; only surplus listings (800-1600 A, 208Y/120 to 480Y/277 V, Power Break mains) were found. No OEM document located.

Evidence record for existing GE AV-Line family: GE publication 'AV-Line Switchboards GEA-7931' cited in a 1983 design text; dealers distinguish AV1 and AV2 and list CCB-type DPK/SPK strap kits, GAVFP filler plates and THLCDPK 'hardware kit for AV panel' for them.

Attribute	Value	Cl.	Sources
Ratings	Surplus units listed at 800, 1200, 1600 A; 120/208 and 480 V 3ph4w	C	S164 surplus_listing
Oem publication	AV-Line Switchboards GEA-7931 (Publication number seen in textbook snippet only)	B	S462 oem_spec
Generations	Dealer panel-type designations 'AV1' and 'AV2' (also 'AV LINE')	C	S444 surplus_listing

Breaker families associated: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)
Key documents: S164 Surplus Record listings: General Electric AV-Line switchboards (800/1200/1600 A); S444 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it; S462 electricalwiring0000star Electrical Wiring and Design: A Practical Approach (1983) - 'For designer's use (AV-Line s
Also fits this family (entry printed elsewhere): TB1DPK, TB4SPK, TB4SBK, TB8SPK, TP8SPK, TJ6SPK, THJV6DPK, TED1DPK2, SG6DPK, GAVFP2, GAVFP3, BSGDGE

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00605	**SG6SPK**	GE SG-frame single mounting kit, 600 A (dealer label 'AV')	SGDA, SGHA, SGLA, SGPA C	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00606	**SGS6K**	SG-frame single mounting kit, 600 A (dealer label 'AV'; possibly aftermarket)	SGDA, SGHA, SGLA, SGPA C	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00607	**THLCDPK**	GE hardware kit for AV panel (THLC breaker, twin)	THLC (inferred from catalog number) C	Discontinued OEM item traded new-surplus / recertified by de

EDH-GEA-00605 **SG6SPK** General Electric branch-connector-kit **DISCONTINUED OEM ITEM**

GE SG-frame single mounting kit, 600 A (dealer label 'AV')

OEM part number	SG6SPK	C	S444 surplus_listing
Description	AV	C	same as above
Application	branch (single)	C	same as above
Installation location	Dealer spec block 'APNB-APN' vs title 'AV' - conflicting	C	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00606 **SGS6K** General Electric branch-connector-kit **DISCONTINUED OEM ITEM**

SG-frame single mounting kit, 600 A (dealer label 'AV'; possibly aftermarket)

OEM part number	SGS6K	C	S444 surplus_listing
Description	AV	C	same as above
Application	branch (single)	C	same as above
Installation location	Dealer spec 'APNB-APN'	C	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*'xxxK' numbering resembles aftermarket kits (SGD1K, SFS1K) - is SGS6K an OEM GE number?*		

EDH-GEA-00607	THLCDPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE hardware kit for AV panel (THLC breaker, twin)

OEM part number	THLCDPK	C	S444 surplus_listing
Description	GEN; Hardware Kit for AV Panel	C	same as above
Installation location	GE AV-Line switchboard	C	same as above
Breaker compatibility	THLC (inferred from catalog number)	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

5.14 RG-SB — ReliaGear SB low voltage switchboards

FAM-GEA-014 · switchboard · aka ReliaGear SB, RGSB · markings: ABB, ReliaGear

ABB successor to GE Spectra switchboards. Plug-in Tmax XT branch breakers mount anywhere in the bus stack; supplied hardware is medium-carbon steel (1/4-20 4 lb-ft, 5/16-18 9, 3/8-16 16, 1/2-13 39 (35 with 2 1/4 in Belleville), 5/8-16 80 lb-ft per IOMM Table 1). No field-kit catalog numbers found in the design guide.

Attribute	Value	Cl.	Sources
Status	Current (ABB)	B	S662 oem_spec
Era of manufacture	Introduced c.2020 (Electrical Wholesaler Top 10 New Product Picks Sept 2020); replaced Spectra Series switchboards 2021	A	S662 p.2; oem_spec
Branch breakers accepted	Tmax XT plug-in spring-loaded circuit breakers in IP20 finger-safe bus stack; SACE Emax 2 drawout mains	A	S662, S663 LCM p.2; IOMM; oem_spec
Torque values	Supplied hardware torques (Table 1): 1/4-20 4 lb-ft; 5/16-18 9 lb-ft; 3/8-16 16 lb-ft; 1/2-13 39 lb-ft (35 lb-ft with 2 1/4 in Belleville washer); 5/8-16 80 lb-ft. Use flat and lock washers; no washers under carriage bolt heads	A	S663 Table 1; oem_spec

Key documents: S662 1SXU900299G0201 Product Life Cycle Announcement - Spectra Switchboards; S663 1VAL088301-MB Rev B ReliaGear SB Low Voltage Switchboards - Installation, Operations and Maintenance Manual; S664 1SQC088005C0201 Rev C ReliaGear SB Switchboard EXcelerate Catalog / Design Guide

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-01048	**3100323960A001**	ReliaGear SB breaker compartment dead front cover 3100323960A001	—	unknown
EDH-GEA-01047	**31018103569A001**	ReliaGear SB breaker compartment dead front cover 31018103569A001	—	unknown

EDH-GEA-01048	3100323960A001	ABB	deadfront	STATUS UNKNOWN

ReliaGear SB breaker compartment dead front cover 3100323960A001

OEM part number	3100323960A001	A	S663 breaker removal section (p.~26); oem_spec
Description	Optional dead front cover for SACE Emax 1.2 compartment - prevents access when the breaker is removed	A	S663 p.~26; oem_spec
Cross-links	Families: RG-SB		
Not yet documented	Dimensions, Material		

EDH-GEA-01047	31018103569A001	ABB	deadfront	STATUS UNKNOWN

ReliaGear SB breaker compartment dead front cover 31018103569A001

OEM part number	31018103569A001	A	S663 breaker removal section (p.~26); oem_spec
Description	Optional dead front cover for SACE Emax 2.2, 4.2 and 6.2 compartments - prevents access when the breaker is removed	A	S663 p.~26; oem_spec
Cross-links	Families: RG-SB		
Not yet documented	Dimensions, Material		

5.15 SPECTRA-SB — Spectra Series Switchboards (group-mounted Class 1; plug-in Spectra distribution panels)

FAM-GEA-013 · switchboard · aka Spectra Series Switchboard, Spectra switchboard, Spectra Series Plug-in Switchboards, SWPS Pro-Stock · markings: GE, ABB

GE Spectra Series group-mounted switchboards (Plainville CT) use Spectra plug-in distribution panel interiors in which branch breakers mount on AMC plug-in modules; fusible branch units can be field-substituted with circuit breaker units. Pro-Stock program numbers SWPS<amps><M|L|D><C|A><T|B>N1[EPM] (DEA-623). Spectra panelboard renewal parts tables list switchboard section widths 35/40/45 in alongside panel box widths 27-31/36-40/44 in (APP fillers, FE covers), indicating shared hardware.

Attribute	Value	Cl.	Sources
Status	Obsolete (ABB LCM). Replacement: ReliaGear SB switchboards; Tmax XT retrofit kits for Spectra bolt-on panelboards/switchboards (single mount 250/600/1200 A, dual mount 150/250/400 A) offered for field replacement	A	S662 pp.1-2; oem_spec
Era of manufacture	GET-8032C catalog dated 02/2013 (marked "GE legacy document"); phased out by ABB 2021: no new quotes after May 20 2021, no orders after Aug 12 2021, no shipments after Dec 9 2021	A	S661, S662 LCM pp.1-3; oem_spec
Successor	ReliaGear SB Switchboards (also replaces Spectra Series Integrated Switchboard and Pro-Stock Spectra Plug-in Switchboards)	A	S662 p.1; oem_spec
Main ampacity	Pro-Stock program: 1200, 1600, 2000 A main bus, copper or aluminum; 65 kA bracing; 3P4W 480Y/277 or 208Y/120 V	A	S649 pp.2-3; oem_spec
Branch breakers accepted	{'value': 'Distribution sections use Spectra plug-in panel (C/B feeders only) with the same AMC...FP plug-in circuit breaker mounting modules as Spectra power panelboards (THQB/THHQB, TEY, FB, TEB/TED/THED/SE, TQD, SF, FG, SG, SK) in 27-44 in box-width ranges', 'conf': 'A', 'src': ['sdea623'], 'page': 'p.4 tables', 'basis': 'oem_spec'}; {'value': 'Class 1 group-mounted mains/feeders to 1200 A; branch devices in Spectra Plug-In or Bolt-On construction; ADS fusible switches in plug-in only. Bolt-on branch sizing: double 100 A THQB/THHQB/TEY/TEB/FC/FB 3X; 150 A TED/THED/SE 3X; 225 A TQD/THQD 3X; 250 A SF/FE 3X; 400-600 A SG/FG 4X (40 in min width); single SF/FE 3X, SG/FG 4X, SKHA/SKLA 6X (40 in), SKPA 6X (45 in); +1X for breakers with side-exit accessory wiring', 'conf': 'A', 'src': ['sget8032'], 'page': 'pp.14, 20 (Section 4)', 'basis': 'oem_spec'}	D	
Construction	Group-mounted sections use a panel-mount arrangement similar or identical to distribution panels; Spectra plug-in modules have spring-reinforced jaws gripping interior bus; expansion kit (handle, base plate, cover plate, load base, switch) converts empty side of a double-branch ADS unit; fillers mount at side of modules or between side trims (1X = 1.375 in)	A	S661 pp.9-10, 14; oem_spec
Related docs	Reference publications: AV3 Access Switchboard DET-138; Powerpanel GET-7006; Integrated Switchboards DEA-373A; Commercial Metering DEA-340; Jiffy II DEA-344; PCU DET-104; PowerBreak II GET-8052	A	S661 p.80; oem_spec

Key documents: S649 DEA-623 Spectra Series Plug-in Switchboards - Pro-Stock Program; S650 BuyLog Section 9, Rev. 1/08 BuyLog Catalog Section 9: Panelboards (A-Series, Spectra Series, SCP Plus, CCB/QMR renewal; S651 DEH41271 R01 Spectra Series Power Panelboards - Circuit Breaker Cover (Record Plus FE frames); S661 GET-8032C (ABB ID 9AKK108467A9254) Spectra Series Switchboards (catalog/application guide) [GE legacy document]; S662 1SXU900299G0201 Product Life Cycle Announcement - Spectra Switchboards

Also fits this family (entry printed elsewhere): AFP2QDD, AFP2TED, AFP3EYD, AFP3FBD, AFP3QDD, AFP3SED, AFP3SFD, AFP4FGD, AFP4SGD, AFP3SFS, AFP4FGS, AFP4SGS, AFP6SKS, AMC6QBFP, AMC6EYFP, AMC6FBFP, AMC6EBFP, AMC6QDFP, AMC6FJFP, AMC6FGBFP, AMC6GBFP, AMC3FJFP, AMC3FGMFP, AMC3GMFP, AMC3KMFP, AMC4EBFP, AMC4SEFP, AMC4QDFP, AMC4FJFP, AMC4FGBFP, AMC4GBFP, AMC2FJFP, AMC2FGMFP, AMC2GMFP, AMC2KMFP, APP1S, APP1, APP1W, APP2S, APP2, APP2W, APP3S, APP3, APP3W, APP4S, APP4, APP4W, APP5S, APP5, APP5W, APP6S, APP6, APP6W, AFP3QBD, 10083889P19, 10083889P20, 10083889P21, 10083889P28, 10083889P29, 10083889P30, 10096990P1, 331A1519G1, 331A1519G2, 331A1519G3, 331A1519G4, 331A1519G5, 331A1519G6, 331A1519G7, 331A1519G8, 331A1519G12, 331A1519G16, 331A1519G20, 331A1519G22, 331A1519G9, 331A1519G10, 331A1519G14, 331A1519G18, 331A1519G11, 331A1519G13, 331A1519G15, 331A1519G17, 331A1519G19, 331A1519G21, 331A1545G1, 331A1545G3, 331A1545G5, 331A1545G7, 331A1545G2, 331A1545G4, 331A1545G6, 331A1545G8, 331A1543G1, AMK350, AMK500, AMK600, AMK750, AMKP101, AMKP2101, AMKP202, AMKP2202, AMKP303, AMKP2303, AMKP404, AMKP2404, AMKP250, AMKP2250, AMKP300, AMKP2300, AMKP350, AMKP2350, AMKP400, AMKP2400, AMKP500, AMKP2500, AMKP600, AMKP2600, AMKP750, AMKP2750, KLP101, KLP300, KLP500, KLP600, KLP750

5.16 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family E150 line (TEB, TED, THED, TEC)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00287	**TC012**	GE TC012 copper-only lug, E150/TB1 thru 150A	E150, TB1 (thru 150 A) A	current
EDH-GEA-00284	**TCAL12**	GE TCAL12 lug, E150/THLC1/TB1 15-60A	E150, THLC1, TB1; 15-60 A A	current
EDH-GEA-00285	**TCAL12A**	GE TCAL12A lug, E150/THLC1/TB1 70-90A	E150, THLC1, TB1; 70-90 A A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00283	**TCAL14**	GE TCAL14 lug, E150/THLC1/TB1 15-30A, (1) #14-8	E150 (TEB/TED/THED), THLC1, TB1; 15-30 A **A**	current
EDH-GEA-00286	**TCAL15**	GE TCAL15 lug, E150/THLC1/TB1 100-150A	E150, THLC1, TB1; 100-150 A **A**	current

EDH-GEA-00287 TC012 GE lug CURRENT

GE TC012 copper-only lug, E150/TB1 thru 150A

OEM part number	TC012	**A**	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150, TB1 (thru 150 A)	**A**	same as above
Kit contents	1 lug; wire range #14-2/0 Cu	**A**	same as above
Material	{'value': 'Copper (copper-only lug, with follower and extra plating)', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00284 TCAL12 GE lug CURRENT

GE TCAL12 lug, E150/THLC1/TB1 15-60A

OEM part number	TCAL12	**A**	S198, S200, S202 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150, THLC1, TB1; 15-60 A	**A**	same as above
Current rating	15-60 A	**A**	same as above
Kit contents	1 lug; wire range (1) #14-3 Cu, #12-1 Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00285 TCAL12A GE lug CURRENT

GE TCAL12A lug, E150/THLC1/TB1 70-90A

OEM part number	TCAL12A	**A**	S198, S200, S202 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150, THLC1, TB1; 70-90 A	**A**	same as above
Current rating	70-90 A	**A**	same as above
Kit contents	1 lug; wire range (1) #6-2/0 Cu, #4-2/0 Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00283	TCAL14	GE	lug	CURRENT

GE TCAL14 lug, E150/THLC1/TB1 15-30A, (1) #14-8

OEM part number	TCAL14	A	S198, S200, S202 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150 (TEB/TED/THED), THLC1, TB1; 15-30 A	A	same as above
Current rating	15-30 A	A	same as above
Kit contents	1 lug; wire range (1) #14-8	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00286	TCAL15	GE	lug	CURRENT

GE TCAL15 lug, E150/THLC1/TB1 100-150A

OEM part number	TCAL15	A	S198, S200, S202 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150, THLC1, TB1; 100-150 A	A	same as above
Current rating	100-150 A	A	same as above
Kit contents	1 lug; wire range (1) #3-3/0 Cu, #1-3/0 Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00726	**TE12PD1**	GE plug-in mounting base TE12PD1 (E150 2-pole, OLS studs)	E150 2-pole A	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00727	**TE12PD2**	GE plug-in mounting base TE12PD2 (E150 2-pole, SLO studs)	E150 2-pole A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00726	TE12PD1	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TE12PD1 (E150 2-pole, OLS studs)

OEM part number	TE12PD1	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration OLS (PD1 unit) for E150 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP1; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	E150 2-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	150 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00727	TE12PD2	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TE12PD2 (E150 2-pole, SLO studs)

OEM part number	TE12PD2	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SLO (PD2 unit) for E150 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP1; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	E150 2-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	150 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00771	**TMP1**	GE optional plug-in mounting plate TMP1 (E150 2-pole/3-pole and SE150 plug-in bases)	E150 2-pole/3-pole and SE150 plug-in bases (TE12PD/TE13PD) A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00771	TMP1	GE	mounting-bracket	NOT LISTED IN ABB ECAT

GE optional plug-in mounting plate TMP1 (E150 2-pole/3-pole and SE150 plug-in bases)

OEM part number	TMP1	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Optional mounting plate for plug-in mounting base assemblies: accurately locates and supports the pair of line and load plug-in bases, attaches the unit to a metal structure and serves as a dead-front barrier; drawings available for customers who fabricate their own plates. Used with E150 2-pole/3-pole and SE150 plug-in bases (TE12PD/TE13PD)	A	same as above
Installation location	Behind the dead front; carries the line and load plug-in bases of one breaker	A	S198 6-105; oem_spec
Breaker compatibility	E150 2-pole/3-pole and SE150 plug-in bases (TE12PD/TE13PD)	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00325	**TEDLS**	GE TEDLS line shield, TEB/TEC/TED/THED	TEB, TEC, TED, THED A	current

EDH-GEA-00325	TEDLS	GE	barrier	CURRENT

GE TEDLS line shield, TEB/TEC/TED/THED

OEM part number	TEDLS	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line shield	A	same as above
Application	accessory	A	same as above
Installation location	Line end of breaker	C	S198, S200 s1 p. 6-102; s3 p. 3-120; inference
Breaker compatibility	TEB, TEC, TED, THED	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Fasteners, OEM instruction document, Kit contents, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00720	**343L564G7**	GE mounting screw kit 343L564G7 for motor-operated mechanism / plug-in base (TED, TB1)	TED, TB1 A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00720	343L564G7	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE mounting screw kit 343L564G7 for motor-operated mechanism / plug-in base (TED, TB1)

OEM part number	343L564G7	A	S198, S200 Rev 1/19 p.6-99; Rev 9/12 p.3-117; oem_spec
Description	Mounting screw kit for motor-operated mechanism; required with plug-in mounting base assembly when used with motor-operating mechanisms or TDR integral-handle kits; furnished no charge when ordered with mounting base	A	same as above
Breaker compatibility	TED, TB1	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00718	**254V644P1**	GE cup washer 254V644P1 for mounting 1-pole E150 breakers	1-pole E150 (TEB/TED/THED) **A**	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00707	**343L162G1**	GE breaker mounting screws 343L162G1 (1-pole E150, clearance-hole plates)	1-pole E150 **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00708	**343L162G7**	GE breaker mounting screws 343L162G7 (1-pole TE, E150, tapped-hole plates)	1-pole TE, E150 **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00718 **254V644P1** GE fastener **LISTED IN ABB ECATALOG**

GE cup washer 254V644P1 for mounting 1-pole E150 breakers

OEM part number	254V644P1	**A**	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Cup washer for mounting 1-pole E150 breakers; 2 required per breaker	**A**	same as above
	ABB eCatalog description: "CUP WASHER FOR 1P E150" (UPC 783164026993)	**A**	S426 oem_spec
Breaker compatibility	1-pole E150 (TEB/TED/THED)	**A**	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	**A**	S426 oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00707 **343L162G1** GE fastener **NOT LISTED IN ABB ECAT**

GE breaker mounting screws 343L162G1 (1-pole E150, clearance-hole plates)

OEM part number	343L162G1	**A**	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screws for mounting plates with clearance holes, 1-pole E150 breakers (BuyLog "Breaker Mounting Screw Kits and Accessories")	**A**	same as above
Breaker compatibility	1-pole E150	**A**	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Finish / plating, Material, quantity, screw size		
Open question	*Screw thread/length not given in table - obtain from GE drawing 343L162 / 343L184*		

EDH-GEA-00708 **343L162G7** GE fastener **NOT LISTED IN ABB ECAT**

GE breaker mounting screws 343L162G7 (1-pole TE, E150, tapped-hole plates)

OEM part number	343L162G7	**A**	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screws for mounting plates with tapped holes, 1-pole TE, E150 breakers (BuyLog "Breaker Mounting Screw Kits and Accessories")	**A**	same as above
Breaker compatibility	1-pole TE, E150	**A**	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Finish / plating, Material, quantity, screw size		
Open question	*Screw thread/length not given in table - obtain from GE drawing 343L162 / 343L184*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00386	**TEF1**	GE TEF1 back-connected line/load stud, E150 2-pole, TB1, THLC1, 2 25/32 in (short)	E150 2-pole, TB1, THLC1 / SE150 (50 A) **A**	current
EDH-GEA-00387	**TEF2**	GE TEF2 back-connected line/load stud, E150 2-pole, TB1, THLC1, 4 13/32 in (long)	E150 2-pole, TB1, THLC1 / SE150 (50 A) **A**	current
EDH-GEA-00388	**TEF3**	GE TEF3 back-connected line/load stud, E150 2-pole, TB1, THLC1, 3 13/32 in (short)	E150 2-pole, TB1, THLC1 / SE150 (150 A) **A**	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00389	**TEF4**	GE TEF4 back-connected line/load stud, E150 2-pole, TB1, THLC1, 5 25/32 in (long)	E150 2-pole, TB1, THLC1 / SE150 (150 A) **A**	current

EDH-GEA-00386	**TEF1**	GE	breaker-accessory	CURRENT

GE TEF1 back-connected line/load stud, E150 2-pole, TB1, THLC1, 2 25/32 in (short)

OEM part number	TEF1	**A**	S198 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (50 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 2 25/32 in (short)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00387	**TEF2**	GE	breaker-accessory	CURRENT

GE TEF2 back-connected line/load stud, E150 2-pole, TB1, THLC1, 4 13/32 in (long)

OEM part number	TEF2	**A**	S198 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (50 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 4 13/32 in (long)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00388	**TEF3**	GE	breaker-accessory	CURRENT

GE TEF3 back-connected line/load stud, E150 2-pole, TB1, THLC1, 3 13/32 in (short)

OEM part number	TEF3	**A**	S198 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (150 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 3 13/32 in (short)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00389	TEF4	GE	breaker-accessory	CURRENT

GE TEF4 back-connected line/load stud, E150 2-pole, TB1, THLC1, 5 25/32 in (long)

OEM part number	TEF4	A	S198 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (150 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 5 25/32 in (long)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

Breaker family F225 line (TFJ, TFK, THFK, TFC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00289	**TCALK324**	GE TCALK324 3-lug kit, F225	F225 A	current

EDH-GEA-00289	TCALK324	GE	lug-kit	CURRENT

GE TCALK324 3-lug kit, F225

OEM part number	TCALK324	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F225	A	same as above
Kit contents	3 lugs; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00290	**TC024**	GE TC024 copper-only lug, TFJ 250A	TFJ (250 A) A	current
EDH-GEA-00288	**TCAL24**	GE TCAL24 lug, F225, (1) #4-300 kcmil Cu-Al	F225 (TFJ/TFK/THFK) A	current
EDH-GEA-00291	**TCAL27**	GE TCAL27 lug, THLC2, (1) #4-300 kcmil Cu-Al	THLC2 A	discontinued

EDH-GEA-00290	TC024	GE	lug	CURRENT

GE TC024 copper-only lug, TFJ 250A

OEM part number	TC024	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ (250 A)	A	same as above
Kit contents	1 lug; wire range #4-300 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00288	TCAL24	GE	lug	CURRENT

GE TCAL24 lug, F225, (1) #4-300 kcmil Cu-Al

OEM part number	TCAL24	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F225 (TFJ/TFK/THFK)	A	same as above
Kit contents	1 lug; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00291	TCAL27	GE	lug	DISCONTINUED

GE TCAL27 lug, THLC2, (1) #4-300 kcmil Cu-Al

OEM part number	TCAL27	A	S200 s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	THLC2	A	same as above
Kit contents	1 lug; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	discontinued (In the 9/12 table but absent from the 11/13 and 1/19 lug tables)	C	S198, S200 s3 p. 3-120; absent from s1 p. 6-102; inference
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Which F225-type frame is THLC2, and what replaced TCAL27 when it left the table?*		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00730	**TF22PD1**	GE plug-in mounting base TF22PD1 (F225 / SF250 2-pole, SOS studs)	F225 / SF250 2-pole A	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00731	**TF22PD2**	GE plug-in mounting base TF22PD2 (F225 / SF250 2-pole, LOL studs)	F225 / SF250 2-pole A	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00732	**TF23PD1**	GE plug-in mounting base TF23PD1 (F225 / SF250 3-pole, SLS studs)	F225 / SF250 3-pole A	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00733	**TF23PD2**	GE plug-in mounting base TF23PD2 (F225 / SF250 3-pole, LSL studs)	F225 / SF250 3-pole A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00730	TF22PD1	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TF22PD1 (F225 / SF250 2-pole, SOS studs)

OEM part number	TF22PD1	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SOS (PD1 unit) for F225 / SF250 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP2; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	F225 / SF250 2-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	225-250 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00731	TF22PD2	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TF22PD2 (F225 / SF250 2-pole, LOL studs)

OEM part number	TF22PD2	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LOL (PD2 unit) for F225 / SF250 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP2; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	F225 / SF250 2-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	225-250 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00732	TF23PD1	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TF23PD1 (F225 / SF250 3-pole, SLS studs)

OEM part number	TF23PD1	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SLS (PD1 unit) for F225 / SF250 3-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP2; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	F225 / SF250 3-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	225-250 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00733	TF23PD2	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TF23PD2 (F225 / SF250 3-pole, LSL studs)

OEM part number	TF23PD2	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LSL (PD2 unit) for F225 / SF250 3-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP2; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	F225 / SF250 3-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	225-250 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00772	**TMP2**	GE optional plug-in mounting plate TMP2 (F225/SF250 plug-in bases)	F225/SF250 plug-in bases (TF22PD/TF23PD) A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00772	TMP2	GE	mounting-bracket	NOT LISTED IN ABB ECAT

GE optional plug-in mounting plate TMP2 (F225/SF250 plug-in bases)

OEM part number	TMP2	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Optional mounting plate for plug-in mounting base assemblies: accurately locates and supports the pair of line and load plug-in bases, attaches the unit to a metal structure and serves as a dead-front barrier; drawings available for customers who fabricate their own plates. Used with F225/SF250 plug-in bases (TF22PD/TF23PD)	A	same as above
Installation location	Behind the dead front; carries the line and load plug-in bases of one breaker	A	S198 6-105; oem_spec
Breaker compatibility	F225/SF250 plug-in bases (TF22PD/TF23PD)	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00326	**TFKLS**	GE TFKLS line shield, TFJ/TFK/TFC	TFJ, TFK, TFC A	current

EDH-GEA-00326	TFKLS	GE	barrier	CURRENT

GE TFKLS line shield, TFJ/TFK/TFC

OEM part number	TFKLS	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ, TFK, TFC	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Fasteners, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00721	**343L564G1**	GE mounting screw kit 343L564G1 for motor-operated mechanism / plug-in base (TFJ, TFK)	TFJ, TFK A	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00725	**343L564G4**	GE mounting screw kit 343L564G4 for TDR integral handle (TFC/TFJ/TFK)	TFC, TFJ, TFK A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00721	343L564G1	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE mounting screw kit 343L564G1 for motor-operated mechanism / plug-in base (TFJ, TFK)

OEM part number	343L564G1	A	S198, S200 Rev 1/19 p.6-99; Rev 9/12 p.3-117; oem_spec
Description	Mounting screw kit for motor-operated mechanism; required with plug-in mounting base assembly when used with motor-operating mechanisms or TDR integral-handle kits; furnished no charge when ordered with mounting base	A	same as above
Breaker compatibility	TFJ, TFK	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00725	343L564G4	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE mounting screw kit 343L564G4 for TDR integral handle (TFC/TFJ/TFK)

OEM part number	343L564G4	A	S200 Rev 9/12 p.3-117; oem_spec
Description	Mounting screw kit for TDR integral handle on TFC, TFJ, TFK breakers (TEC/TED/TB1-B/TJC/TJJ/TJK/TB4/TBC/TKC/TKM/TB6/TB8 need no special screw)	A	same as above
Breaker compatibility	TFC, TFJ, TFK	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00390	**TFK1**	GE TFK1 back-connected line/load stud, TFJ, TFK, THFK, 2 23/32 in (short)	TFJ, TFK, THFK / SF250 (225-250 A) **A**	current
EDH-GEA-00391	**TFK2**	GE TFK2 back-connected line/load stud, TFJ, TFK, THFK, 5 31/32 in (long)	TFJ, TFK, THFK / SF250 (225-250 A) **A**	current

EDH-GEA-00390	TFK1	GE	breaker-accessory	CURRENT

GE TFK1 back-connected line/load stud, TFJ, TFK, THFK, 2 23/32 in (short)

OEM part number	TFK1	A	S198 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ, TFK, THFK / SF250 (225-250 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 2 23/32 in (short)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-101; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00391	TFK2	GE	breaker-accessory	CURRENT

GE TFK2 back-connected line/load stud, TFJ, TFK, THFK, 5 31/32 in (long)

OEM part number	TFK2	A	S198 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ, TFK, THFK / SF250 (225-250 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 5 31/32 in (long)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-101; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

Breaker family GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00776	**TMP5**	GE optional plug-in mounting plate TMP5 (TB1 with TE13PD bases)	TB1 with TE13PD bases (2012 table only) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00777	**TMP6**	GE optional plug-in mounting plate TMP6 (TB4 with TJ42PD/TJ43PD bases)	TB4 with TJ42PD/TJ43PD bases (2012 table only) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00778	**TMP7**	GE optional plug-in mounting plate TMP7 (TB6/TB8 with TK6x/TK8x bases)	TB6/TB8 with TK6x/TK8x bases (2012 table only) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00776 — TMP5 — GE — mounting-bracket — NOT LISTED IN ABB ECAT

GE optional plug-in mounting plate TMP5 (TB1 with TE13PD bases)

OEM part number	TMP5	**A**	S200 Rev 9/12 p.3-123; oem_spec
Description	Optional mounting plate for plug-in mounting base assemblies: accurately locates and supports the pair of line and load plug-in bases, attaches the unit to a metal structure and serves as a dead-front barrier; drawings available for customers who fabricate their own plates. Used with TB1 with TE13PD bases (2012 table only)	**A**	same as above
Installation location	Behind the dead front; carries the line and load plug-in bases of one breaker	**A**	S198 6-105; oem_spec
Breaker compatibility	TB1 with TE13PD bases (2012 table only)	**A**	S200 Rev 9/12 p.3-123; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00777 — TMP6 — GE — mounting-bracket — NOT LISTED IN ABB ECAT

GE optional plug-in mounting plate TMP6 (TB4 with TJ42PD/TJ43PD bases)

OEM part number	TMP6	**A**	S200 Rev 9/12 p.3-123; oem_spec
Description	Optional mounting plate for plug-in mounting base assemblies: accurately locates and supports the pair of line and load plug-in bases, attaches the unit to a metal structure and serves as a dead-front barrier; drawings available for customers who fabricate their own plates. Used with TB4 with TJ42PD/TJ43PD bases (2012 table only)	**A**	same as above
Installation location	Behind the dead front; carries the line and load plug-in bases of one breaker	**A**	S198 6-105; oem_spec
Breaker compatibility	TB4 with TJ42PD/TJ43PD bases (2012 table only)	**A**	S200 Rev 9/12 p.3-123; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00778	TMP7	GE	mounting-bracket	NOT LISTED IN ABB ECAT

GE optional plug-in mounting plate TMP7 (TB6/TB8 with TK6x/TK8x bases)

OEM part number	TMP7	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Optional mounting plate for plug-in mounting base assemblies: accurately locates and supports the pair of line and load plug-in bases, attaches the unit to a metal structure and serves as a dead-front barrier; drawings available for customers who fabricate their own plates. Used with TB6/TB8 with TK6x/TK8x bases (2012 table only)	A	same as above
Installation location	Behind the dead front; carries the line and load plug-in bases of one breaker	A	S198 6-105; oem_spec
Breaker compatibility	TB6/TB8 with TK6x/TK8x bases (2012 table only)	A	S200 Rev 9/12 p.3-123; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Breaker family GE TQ / TQL / TQC / TQB / TBQ lighting breakers

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00781	**565B837G1**	GE TQL plug-in mounting base 565B837G1 (100 A, 3-pole)	TQL A	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00782	**565B837G2**	GE TQL plug-in mounting base 565B837G2 (100 A, 2-pole)	TQL A	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00779	**571B595DDG1**	GE TQL plug-in mounting base 571B595DDG1 (70 A, 2-pole)	TQL A	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00780	**571B595DDG2**	GE TQL plug-in mounting base 571B595DDG2 (70 A, 3-pole)	TQL A	Listed in ABB eCatalog (2026-10-21), stock status A

EDH-GEA-00781	565B837G1	GE	breaker-mounting-kit	LISTED IN ABB ECATALOG

GE TQL plug-in mounting base 565B837G1 (100 A, 3-pole)

OEM part number	565B837G1	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Description	Plug-in mounting base for TQL breakers, 100 A, 3-pole	A	same as above
	ABB eCatalog description: "CROSS BAR & MECHANISM" (UPC 783164132557)	A	S426 oem_spec
Breaker compatibility	TQL	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Poles	3	A	S198 6-29; oem_spec
Current rating	100 A	A	same as above
Status	Listed in ABB eCatalog (2026-10-21), stock status A	A	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		
Open question	*ABB eCatalog describes 565B837G1 as "CROSS BAR & MECHANISM" while BuyLog lists it as a 100 A 3-pole TQL plug-in mounting base - verify*		

EDH-GEA-00782	565B837G2	GE	breaker-mounting-kit	LISTED IN ABB ECATALOG

GE TQL plug-in mounting base 565B837G2 (100 A, 2-pole)

OEM part number	565B837G2	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Description	Plug-in mounting base for TQL breakers, 100 A, 2-pole	A	same as above
	ABB eCatalog description: "PLUGIN BASE 2P 100A TQL MCB" (UPC 783164132564)	A	S426 oem_spec
Breaker compatibility	TQL	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Poles	2	A	S198 6-29; oem_spec
Current rating	100 A	A	same as above
Status	Listed in ABB eCatalog (2026-10-21), stock status A	A	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00779	571B595DDG1	GE	breaker-mounting-kit	LISTED IN ABB ECATALOG

GE TQL plug-in mounting base 571B595DDG1 (70 A, 2-pole)

OEM part number	571B595DDG1	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Description	Plug-in mounting base for TQL breakers, 70 A, 2-pole	A	same as above
	ABB eCatalog description: "ASM SPEC 2P MTG PLATE" (UPC 783164028812)	A	S426 oem_spec
Breaker compatibility	TQL	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Poles	2	A	S198 6-29; oem_spec
Current rating	70 A	A	same as above
Status	Listed in ABB eCatalog (2026-10-21), stock status A	A	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		
Open question	*ABB eCatalog descriptions call 571B595DDG1/G2 "mounting plate" assemblies; BuyLog calls them plug-in mounting bases*		

EDH-GEA-00780	571B595DDG2	GE	breaker-mounting-kit	LISTED IN ABB ECATALOG

GE TQL plug-in mounting base 571B595DDG2 (70 A, 3-pole)

OEM part number	571B595DDG2	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Description	Plug-in mounting base for TQL breakers, 70 A, 3-pole	A	same as above
	ABB eCatalog description: "SPECIAL 3-POLE MOUNTING PLATE" (UPC 783164129069)	A	S426 oem_spec
Breaker compatibility	TQL	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Poles	3	A	S198 6-29; oem_spec
Current rating	70 A	A	same as above
Status	Listed in ABB eCatalog (2026-10-21), stock status A	A	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		
Open question	*ABB eCatalog descriptions call 571B595DDG1/G2 "mounting plate" assemblies; BuyLog calls them plug-in mounting bases*		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00783	**TQCBMPA1**	GE THQC back mounting plate (screw type) TQCBMPA1, 1-pole	THQC **A**	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00786	**TQCBMPA10**	GE THQC back mounting plate (screw type) TQCBMPA10, 10-pole	THQC **A**	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00784	**TQCBMPA2**	GE THQC back mounting plate (screw type) TQCBMPA2, 2-pole	THQC **A**	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00785	**TQCBMPA3**	GE THQC back mounting plate (screw type) TQCBMPA3, 3-pole	THQC **A**	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00791	**TQCFMP1**	GE THQC front-mounting plate TQCFMP1, 1-pole	THQC **A**	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00792	**TQCFMP2**	GE THQC front-mounting plate TQCFMP2, 2-pole	THQC **A**	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00793	**TQCFMP3**	GE THQC front-mounting plate TQCFMP3, 3-pole	THQC **A**	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00794	**TQCFMP4**	GE THQC front-mounting plate TQCFMP4, 4-pole	THQC **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00787	**TQCGFBMPA1**	GE THQC/THQC-GF snap-in back mounting plate TQCGFBMPA1, 1-pole	THQC, THQC-GF **A**	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00790	**TQCGFBMPA10**	GE THQC/THQC-GF snap-in back mounting plate TQCGFBMPA10, 10-pole	THQC, THQC-GF **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00788	**TQCGFBMPA2**	GE THQC/THQC-GF snap-in back mounting plate TQCGFBMPA2, 2-pole	THQC, THQC-GF **A**	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00789	**TQCGFBMPA3**	GE THQC/THQC-GF snap-in back mounting plate TQCGFBMPA3, 3-pole	THQC, THQC-GF **A**	Listed in ABB eCatalog (2026-10-21), stock status A

EDH-GEA-00783 TQCBMPA1 GE mounting-bracket LISTED IN ABB ECATALOG

GE THQC back mounting plate (screw type) TQCBMPA1, 1-pole

OEM part number	TQCBMPA1	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Description	Back mounting plate, screw type, 1 pole(s), for THQC breakers	**A**	same as above
	ABB eCatalog description: "BACK MOUNTING PLATE- SCREW TYPE" (UPC 783164061086)	**A**	S426 oem_spec
Breaker compatibility	THQC	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Poles	1	**A**	S198 6-29; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	**A**	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00786 TQCBMPA10 GE mounting-bracket LISTED IN ABB ECATALOG

GE THQC back mounting plate (screw type) TQCBMPA10, 10-pole

OEM part number	TQCBMPA10	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Description	Back mounting plate, screw type, 10 pole(s), for THQC breakers	**A**	same as above
	ABB eCatalog description: "BACK MOUNTG PLATE-SCREW TYP-10 POLE" (UPC 783164174137)	**A**	S426 oem_spec
Breaker compatibility	THQC	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Poles	10	**A**	S198 6-29; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	**A**	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00784	TQCBMPA2	GE	mounting-bracket	LISTED IN ABB ECATALOG

GE THQC back mounting plate (screw type) TQCBMPA2, 2-pole

OEM part number	TQCBMPA2	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Description	Back mounting plate, screw type, 2 pole(s), for THQC breakers	**A**	same as above
	ABB eCatalog description: "BACK MOUNTG PLATE-SCREW TYP-2 POLE" (UPC 783164061093)	**A**	S426 oem_spec
Breaker compatibility	THQC	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Poles	2	**A**	S198 6-29; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	**A**	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00785	TQCBMPA3	GE	mounting-bracket	LISTED IN ABB ECATALOG

GE THQC back mounting plate (screw type) TQCBMPA3, 3-pole

OEM part number	TQCBMPA3	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Description	Back mounting plate, screw type, 3 pole(s), for THQC breakers	**A**	same as above
	ABB eCatalog description: "BACK MOUNTG PLATE-SCREW TYP-3 POLE" (UPC 783164061109)	**A**	S426 oem_spec
Breaker compatibility	THQC	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Poles	3	**A**	S198 6-29; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	**A**	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00791	TQCFMP1	GE	mounting-bracket	LISTED IN ABB ECATALOG

GE THQC front-mounting plate TQCFMP1, 1-pole

OEM part number	TQCFMP1	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Alternate / superseded numbers	TQCFMP11 (as printed with footnote 1 ("Not UL listed") fused to number; base number confirmed by ABB eCatalog for TQCFMP1/TQCFMP2)	**A**	S198, S200 alias; 6-29; 3-28; oem_spec
Description	Front-mounting plate, 1 pole(s), for THQC breakers; not UL listed (footnote 1)	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
	ABB eCatalog description: "FRONT MOUNTING PLATE - 1-POLE THQCC" (UPC 783164021011)	**A**	S426 oem_spec
Breaker compatibility	THQC	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Poles	1	**A**	S198 6-29; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	**A**	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00792	TQCFMP2	GE	mounting-bracket	LISTED IN ABB ECATALOG

GE THQC front-mounting plate TQCFMP2, 2-pole

OEM part number	TQCFMP2	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Alternate / superseded numbers	TQCFMP21 (as printed with footnote 1 ("Not UL listed") fused to number; base number confirmed by ABB eCatalog for TQCFMP1/TQCFMP2)	A	S198, S200 alias; 6-29; 3-28; oem_spec
Description	Front-mounting plate, 2 pole(s), for THQC breakers; not UL listed (footnote 1)	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
	ABB eCatalog description: "FRONT MOUNTING PLATE 2-POLE THQC" (UPC 783164021028)	A	S426 oem_spec
Breaker compatibility	THQC	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Poles	2	A	S198 6-29; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	A	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00793	TQCFMP3	GE	mounting-bracket	LISTED IN ABB ECATALOG

GE THQC front-mounting plate TQCFMP3, 3-pole

OEM part number	TQCFMP3	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Alternate / superseded numbers	TQCFMP31 (as printed with footnote 1 ("Not UL listed") fused to number; base number confirmed by ABB eCatalog for TQCFMP1/TQCFMP2)	A	S198, S200 alias; 6-29; 3-28; oem_spec
Description	Front-mounting plate, 3 pole(s), for THQC breakers; not UL listed (footnote 1)	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
	ABB eCatalog description: "FRONT MOUNTING PLATE 3-POLE THQC" (UPC 783164021035)	A	S426 oem_spec
Breaker compatibility	THQC	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Poles	3	A	S198 6-29; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	A	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00794	TQCFMP4	GE	mounting-bracket	NOT LISTED IN ABB ECAT

GE THQC front-mounting plate TQCFMP4, 4-pole

OEM part number	TQCFMP4	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Alternate / superseded numbers	TQCFMP41 (as printed with footnote 1 ("Not UL listed") fused to number; base number confirmed by ABB eCatalog for TQCFMP1/TQCFMP2)	A	S198, S200 alias; 6-29; 3-28; oem_spec
Description	Front-mounting plate, 4 pole(s), for THQC breakers; not UL listed (footnote 1)	A	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Breaker compatibility	THQC	A	same as above
Poles	4	A	S198 6-29; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00787	TQCGFBMPA1	GE	mounting-bracket	LISTED IN ABB ECATALOG

GE THQC/THQC-GF snap-in back mounting plate TQCGFBMPA1, 1-pole

OEM part number	TQCGFBMPA1	A	S198 Rev 1/19 p.6-29; oem_spec
Description	Snap-in back mounting plate, 1 pole(s), for THQC and THQC-GF breakers	A	same as above
	ABB eCatalog description: "BACK MOUNTING PLATE-SNAP-IN 1-POLE" (UPC 783164143942)	A	S426 oem_spec
Breaker compatibility	THQC, THQC-GF	A	S198 Rev 1/19 p.6-29; oem_spec
Poles	1	A	S198 6-29; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	A	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00790	TQCGFBMPA10	GE	mounting-bracket	NOT LISTED IN ABB ECAT

GE THQC/THQC-GF snap-in back mounting plate TQCGFBMPA10, 10-pole

OEM part number	TQCGFBMPA10	A	S198 Rev 1/19 p.6-29; oem_spec
Description	Snap-in back mounting plate, 10 pole(s), for THQC and THQC-GF breakers	A	same as above
Breaker compatibility	THQC, THQC-GF	A	same as above
Poles	10	A	S198 6-29; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00788	TQCGFBMPA2	GE	mounting-bracket	LISTED IN ABB ECATALOG

GE THQC/THQC-GF snap-in back mounting plate TQCGFBMPA2, 2-pole

OEM part number	TQCGFBMPA2	A	S198 Rev 1/19 p.6-29; oem_spec
Description	Snap-in back mounting plate, 2 pole(s), for THQC and THQC-GF breakers	A	same as above
	ABB eCatalog description: "BACK MOUNTING PLATE SNAP-IN 2-POLE" (UPC 783164143959)	A	S426 oem_spec
Breaker compatibility	THQC, THQC-GF	A	S198 Rev 1/19 p.6-29; oem_spec
Poles	2	A	S198 6-29; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	A	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00789	TQCGFBMPA3	GE	mounting-bracket	LISTED IN ABB ECATALOG

GE THQC/THQC-GF snap-in back mounting plate TQCGFBMPA3, 3-pole

OEM part number	TQCGFBMPA3	A	S198 Rev 1/19 p.6-29; oem_spec
Description	Snap-in back mounting plate, 3 pole(s), for THQC and THQC-GF breakers	A	same as above
	ABB eCatalog description: "BACK MOUNTING PLATE SNAP-IN 3-POLE" (UPC 783164143966)	A	S426 oem_spec
Breaker compatibility	THQC, THQC-GF	A	S198 Rev 1/19 p.6-29; oem_spec
Poles	3	A	S198 6-29; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	A	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00795	**THQCFMK**	GE THQCFMK front/rear mounting clips for THQC (pack of 48)	THQC 1 & 2-pole 15-60 A **A**	Listed in ABB eCatalog (2026-10-21)

EDH-GEA-00795 **THQCFMK** GE fastener **LISTED IN ABB ECATALOG**

GE THQCFMK front/rear mounting clips for THQC (pack of 48)

OEM part number	THQCFMK	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Description	Pack of 48 front/rear mounting clips for THQC 1- and 2-pole 15-60 A breakers (optional front/rear panel mounting kit)	**A**	same as above
	ABB eCatalog description: "KIT OF 48 FRONT/REAR MTG CLIPS" (UPC 783164083972)	**A**	S426 oem_spec
Breaker compatibility	THQC 1 & 2-pole 15-60 A	**A**	S198, S200 Rev 1/19 p.6-29; Rev 9/12 p.3-28; oem_spec
Kit contents	48 clips	**A**	S198 6-29; oem_spec
Status	Listed in ABB eCatalog (2026-10-21)	**A**	S426 oem_spec
Cross-links	Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Breaker family J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00300	**TCALK343**	GE TCALK343 3-lug kit, TLB4/THLC4	TLB4, THLC4 **A**	discontinued
EDH-GEA-00294	**TCALK347**	GE TCALK347 3-lug kit, J400/TJD 750 kcmil	J400, TJD **A**	discontinued
EDH-GEA-00296	**TCALK363**	GE TCALK363 3-lug kit, J600 450-600A	J600 (450-600 A) **A**	current

EDH-GEA-00300 **TCALK343** GE lug-kit **DISCONTINUED**

GE TCALK343 3-lug kit, TLB4/THLC4

OEM part number	TCALK343	**A**	S200 s3 p. 3-120; oem_spec
Description	3-lug kit	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TLB4, THLC4	**A**	same as above
Kit contents	3 lugs; wire range (1) 3/0-500 kcmil or (2) 3/0-250 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	discontinued (Not in the 11/13 or 1/19 tables)	**C**	S198, S200 inference
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00294 **TCALK347** GE lug-kit **DISCONTINUED**

GE TCALK347 3-lug kit, J400/TJD 750 kcmil

OEM part number	TCALK347	**A**	S200 s3 p. 3-120; oem_spec
Description	3-lug kit (TCAL47 range)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	J400, TJD	**A**	same as above
Kit contents	3 lugs; wire range (1) 750 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	discontinued (In 9/12 but not in the 11/13 or 1/19 tables)	**C**	S198, S200 absent from s1 p. 6-102; inference
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00296	TCALK363	GE	lug-kit	CURRENT

GE TCALK363 3-lug kit, J600 450-600A

OEM part number	TCALK363	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600 (450-600 A)	A	same as above
Kit contents	3 lugs; wire range (2) 4/0-350 kcmil Cu or (2) 300-500 kcmil Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00297	**TC043**	GE TC043 copper-only lug, J400/TB4	J400, TB4 A	current
EDH-GEA-00298	**TC063**	GE TC063 copper-only lug, J600	J600 A	current
EDH-GEA-00292	**TCAL43**	GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD	J400, TB4, J600 (thru 400 A), TJD; TJJ/TJK/THJK 400A frame (all rating A	current
EDH-GEA-00293	**TCAL47**	GE TCAL47 lug, J400/TJD, (1) 750 kcmil Cu-Al	J400, TJD; alternate on TJJ/TJK 400A A	current
EDH-GEA-00295	**TCAL63**	GE TCAL63 lug, J600 450-600A	J600 (450-600 A); TJK/THJK 600A frame 450-600 A A	current
EDH-GEA-00299	**TCLK43**	GE TCLK43 lug, TLB4/THLC4	TLB4, THLC4 A	current

EDH-GEA-00297	TC043	GE	lug	CURRENT

GE TC043 copper-only lug, J400/TB4

OEM part number	TC043	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J400, TB4	A	same as above
Kit contents	1 lug; wire range (1) 6-600 kcmil or (2) 1/0-250 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00298	TC063	GE	lug	CURRENT

GE TC063 copper-only lug, J600

OEM part number	TC063	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600	A	same as above
Kit contents	1 lug; wire range (2) 250-350 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00292	TCAL43	GE	lug	CURRENT

GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD

OEM part number	TCAL43	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-36, 6-37; oem_spec
Alternate / superseded numbers	TCAL433 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL433 / TCAL432'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Footnote 2/3 on p. 6-36/37 reads 'Alternate lug for 750 kcmil Cu/Al cable, Product Number TCAL47'.)	B	S198, S200 alias; s1 p. 6-36; s3 TJJ/TJK tables; oem_spec
Description	Copper-aluminum single lug, standard lug on TJJ/TJK 400A frames and on J600 frames rated 250-400 A	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-36, 6-37; oem_spec
Application	accessory	A	same as above
Breaker compatibility	J400, TB4, J600 (thru 400 A), TJD; TJJ/TJK/THJK 400A frame (all ratings); TJK/THJK 600A frame 250-400 A	A	same as above
Kit contents	1 lug; order 2 per pole; wire range (1) 6-600 kcmil or (2) 2/0-250 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00293	TCAL47	GE	lug	CURRENT

GE TCAL47 lug, J400/TJD, (1) 750 kcmil Cu-Al

OEM part number	TCAL47	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-36 fn; oem_spec
Description	Copper-aluminum single lug, alternate lug for 750 kcmil Cu/Al cable on TJJ/TJK	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J400, TJD; alternate on TJJ/TJK 400A	A	same as above
Kit contents	1 lug; wire range (1) 750 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00295	TCAL63	GE	lug	CURRENT

GE TCAL63 lug, J600 450-600A

OEM part number	TCAL63	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-37; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600 (450-600 A); TJK/THJK 600A frame 450-600 A	A	same as above
Kit contents	1 lug; order 2 per pole; wire range (2) 4/0-350 kcmil Cu or (2) 300-500 kcmil Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00299	TCLK43	GE	lug	CURRENT

GE TCLK43 lug, TLB4/THLC4

OEM part number	TCLK43	**A**	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TLB4, THLC4	**A**	same as above
Kit contents	1 lug; wire range (1) 3/0-500 kcmil or (2) 3/0-250 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00734	**TJ42PD1A**	GE plug-in mounting base TJ42PD1A (J400 2-pole (also TB4 in 2012), SOS studs)	J400 2-pole (also TB4 in 2012) **A**	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00735	**TJ42PD2A**	GE plug-in mounting base TJ42PD2A (J400 2-pole (also TB4 in 2012), LOL studs)	J400 2-pole (also TB4 in 2012) **A**	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00760	**TJ43PC1A**	GE plug-in mounting base TJ43PC1A (J400 3-pole, vertical studs (SLS))	J400 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00736	**TJ43PD1A**	GE plug-in mounting base TJ43PD1A (J400 3-pole (also TB4 in 2012), SLS studs)	J400 3-pole (also TB4 in 2012) **A**	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00737	**TJ43PD2A**	GE plug-in mounting base TJ43PD2A (J400 3-pole (also TB4 in 2012), LSL studs)	J400 3-pole (also TB4 in 2012) **A**	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00738	**TJ62PD1A**	GE plug-in mounting base TJ62PD1A (J600 2-pole, SOS studs)	J600 2-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00739	**TJ62PD2A**	GE plug-in mounting base TJ62PD2A (J600 2-pole, LOL studs)	J600 2-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00761	**TJ63PC1A**	GE plug-in mounting base TJ63PC1A (J600 3-pole, vertical studs (SLS))	J600 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00740	**TJ63PD1A**	GE plug-in mounting base TJ63PD1A (J600 3-pole, SLS studs)	J600 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00741	**TJ63PD2A**	GE plug-in mounting base TJ63PD2A (J600 3-pole, LSL studs)	J600 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00734	TJ42PD1A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TJ42PD1A (J400 2-pole (also TB4 in 2012), SOS studs)

OEM part number	TJ42PD1A	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SOS (PD1 unit) for J400 2-pole (also TB4 in 2012) breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP3 (TMP6 for TB4); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	J400 2-pole (also TB4 in 2012)	A	S200 Rev 9/12 p.3-123; oem_spec
Current rating	400 A	A	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	B	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00735	TJ42PD2A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TJ42PD2A (J400 2-pole (also TB4 in 2012), LOL studs)

OEM part number	TJ42PD2A	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LOL (PD2 unit) for J400 2-pole (also TB4 in 2012) breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP3 (TMP6 for TB4); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	J400 2-pole (also TB4 in 2012)	A	S200 Rev 9/12 p.3-123; oem_spec
Current rating	400 A	A	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	B	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00760	TJ43PC1A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TJ43PC1A (J400 3-pole, vertical studs (SLS))

OEM part number	TJ43PC1A	A	S198 Rev 1/19 p.6-105; oem_spec
Description	Plug-in mounting base assembly with vertical studs ("C" in place of "D"), J400 3-pole, vertical studs (SLS). Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Breaker compatibility	J400 3-pole	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00736	TJ43PD1A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TJ43PD1A (J400 3-pole (also TB4 in 2012), SLS studs)

OEM part number	TJ43PD1A	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SLS (PD1 unit) for J400 3-pole (also TB4 in 2012) breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP3 (TMP6 for TB4); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	J400 3-pole (also TB4 in 2012)	A	S200 Rev 9/12 p.3-123; oem_spec
Current rating	400 A	A	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	B	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00737	TJ43PD2A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TJ43PD2A (J400 3-pole (also TB4 in 2012), LSL studs)

OEM part number	TJ43PD2A	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LSL (PD2 unit) for J400 3-pole (also TB4 in 2012) breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP3 (TMP6 for TB4); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	J400 3-pole (also TB4 in 2012)	A	S200 Rev 9/12 p.3-123; oem_spec
Current rating	400 A	A	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	B	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00738	TJ62PD1A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TJ62PD1A (J600 2-pole, SOS studs)

OEM part number	TJ62PD1A	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SOS (PD1 unit) for J600 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP3; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	J600 2-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	600 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00739	TJ62PD2A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TJ62PD2A (J600 2-pole, LOL studs)

OEM part number	TJ62PD2A	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LOL (PD2 unit) for J600 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP3; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	J600 2-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	600 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00761	TJ63PC1A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TJ63PC1A (J600 3-pole, vertical studs (SLS))

OEM part number	TJ63PC1A	A	S198 Rev 1/19 p.6-105; oem_spec
Description	Plug-in mounting base assembly with vertical studs ("C" in place of "D"), J600 3-pole, vertical studs (SLS). Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Breaker compatibility	J600 3-pole	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00740	TJ63PD1A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TJ63PD1A (J600 3-pole, SLS studs)

OEM part number	TJ63PD1A	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SLS (PD1 unit) for J600 3-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP3; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	J600 3-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	600 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00741	TJ63PD2A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TJ63PD2A (J600 3-pole, LSL studs)

OEM part number	TJ63PD2A	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LSL (PD2 unit) for J600 3-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP3; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	J600 3-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	600 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00773	**TMP3**	GE optional plug-in mounting plate TMP3 (J400/J600 plug-in bases)	J400/J600 plug-in bases (TJ4xPD/TJ6xPD) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00773	TMP3	GE	mounting-bracket	NOT LISTED IN ABB ECAT

GE optional plug-in mounting plate TMP3 (J400/J600 plug-in bases)

OEM part number	TMP3	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Optional mounting plate for plug-in mounting base assemblies: accurately locates and supports the pair of line and load plug-in bases, attaches the unit to a metal structure and serves as a dead-front barrier; drawings available for customers who fabricate their own plates. Used with J400/J600 plug-in bases (TJ4xPD/TJ6xPD)	A	same as above
Installation location	Behind the dead front; carries the line and load plug-in bases of one breaker	A	S198 6-105; oem_spec
Breaker compatibility	J400/J600 plug-in bases (TJ4xPD/TJ6xPD)	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00327	**TJKLS**	GE TJKLS line shield, TJJ/TJK/TJC	TJJ, TJK, TJC A	current

EDH-GEA-00327	TJKLS	GE	barrier	CURRENT

GE TJKLS line shield, TJJ/TJK/TJC

OEM part number	TJKLS	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TJJ, TJK, TJC	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Fasteners, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00722	**343L564G2**	GE mounting screw kit 343L564G2 for motor-operated mechanism / plug-in base (TJJ, TJK, TB4)	TJJ, TJK, TB4 A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00722	343L564G2	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE mounting screw kit 343L564G2 for motor-operated mechanism / plug-in base (TJJ, TJK, TB4)

OEM part number	343L564G2	A	S198, S200 Rev 1/19 p.6-99; Rev 9/12 p.3-117; oem_spec
Description	Mounting screw kit for motor-operated mechanism; required with plug-in mounting base assembly when used with motor-operating mechanisms or TDR integral-handle kits; furnished no charge when ordered with mounting base	A	same as above
Breaker compatibility	TJJ, TJK, TB4	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00710	**343L162G11**	GE breaker mounting screws 343L162G11 (J600, tapped-hole plates)	J600 A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00711	**343L162G20**	GE breaker mounting screws 343L162G20 (J600, clearance-hole plates)	J600 **A**	Present in Rev 9/12 table; row absent from Rev 1/19 table

EDH-GEA-00710 **343L162G11** GE fastener **NOT LISTED IN ABB ECAT**

GE breaker mounting screws 343L162G11 (J600, tapped-hole plates)

OEM part number	343L162G11	**A**	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screws for mounting plates with tapped holes, J600 breakers (BuyLog "Breaker Mounting Screw Kits and Accessories")	**A**	same as above
Breaker compatibility	J600	**A**	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC), TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, Finish / plating, Material, quantity, screw size		
Open question	*Screw thread/length not given in table - obtain from GE drawing 343L162 / 343L184*		

EDH-GEA-00711 **343L162G20** GE fastener **PRESENT IN REV 9/12 TA**

GE breaker mounting screws 343L162G20 (J600, clearance-hole plates)

OEM part number	343L162G20	**A**	S200 Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screws for mounting plates with clearance holes, J600 breakers (BuyLog "Breaker Mounting Screw Kits and Accessories")	**A**	same as above
Breaker compatibility	J600	**A**	same as above
Status	Present in Rev 9/12 table; row absent from Rev 1/19 table (dropped from catalog; actual availability unknown)	**B**	S200, S198 3-119 vs 6-101; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC), TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, Finish / plating, Material, quantity, screw size		
Open question	*Screw thread/length not given in table - obtain from GE drawing 343L162 / 343L184*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00334	**TJLVK**	GE TJLVK line voltage control wire kit, J600	J600 **A**	discontinued

EDH-GEA-00334 **TJLVK** GE breaker-accessory **DISCONTINUED**

GE TJLVK line voltage control wire kit, J600

OEM part number	TJLVK	**A**	S200 s3 p. 3-120; oem_spec
Alternate / superseded numbers	TJLVK8 (as printed) [alias] (Footnote 8 = '3-pole kit')	**B**	same as above
Description	Line voltage control wire kit for terminating control wire at breaker lugs (3-pole kit per footnote)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	J600	**A**	same as above
Status	discontinued (Not in the 1/19 table)	**C**	S198, S200 inference
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00313	**TCALK2121**	GE TCALK2121 2-lug kit with wrench (TCAL121)	K1200 (1000-1200 A) **B**	current
EDH-GEA-00317	**TCALK2122**	GE TCALK2122 2-lug kit (TCAL122)	K1200 (1200 A) **B**	current
EDH-GEA-00305	**TCALK261**	GE TCALK261 2-lug kit with wrench, K1200/TB6	K1200, TB6 (300-600 A) **A**	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00309	**TCALK281**	GE TCALK281 2-lug kit with wrench (TCAL81)	K1200/TB8 600-800 A; Spectra SK1200 300-800 A **A**	current
EDH-GEA-00320	**TCALK291**	GE TCALK291 2-lug kit, TK4V load end	TK4V - load end **B**	current
EDH-GEA-00314	**TCALK3121**	GE TCALK3121 3-lug kit with wrench (TCAL121)	K1200 (1000-1200 A) **B**	current
EDH-GEA-00318	**TCALK3122**	GE TCALK3122 3-lug kit (TCAL122)	K1200 (1200 A) **B**	current
EDH-GEA-00302	**TCALK341**	GE TCALK341 3-lug kit, K1200/TB6 300-400A	K1200, TB6 (300-400 A) **A**	discontinued
EDH-GEA-00306	**TCALK361**	GE TCALK361 3-lug kit with wrench, K1200/TB6	K1200, TB6 (300-600 A) **A**	current
EDH-GEA-00310	**TCALK381**	GE TCALK381 3-lug kit with wrench (TCAL81)	K1200/TB8 600-800 A; Spectra SK1200 300-800 A **A**	current
EDH-GEA-00321	**TCALK391**	GE TCALK391 3-lug kit, TK4V load end	TK4V - load end **B**	current

EDH-GEA-00313 — TCALK2121 — GE — lug-kit — CURRENT

GE TCALK2121 2-lug kit with wrench (TCAL121)

OEM part number	TCALK2121	**B**	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK21214 / TCALK21212 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK21214/TCALK21212'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	**B**	same as above
Description	2-lug kit with wrench	**B**	same as above
Application	accessory	**B**	same as above
Breaker compatibility	K1200 (1000-1200 A)	**B**	same as above
Kit contents	2 lugs + wrench; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al	**B**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**B**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00317 — TCALK2122 — GE — lug-kit — CURRENT

GE TCALK2122 2-lug kit (TCAL122)

OEM part number	TCALK2122	**B**	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK21225 / TCALK21223 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK21225/TCALK21223'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	**B**	same as above
Description	2-lug kit with wrench	**B**	same as above
Application	accessory	**B**	same as above
Breaker compatibility	K1200 (1200 A)	**B**	same as above
Kit contents	2 lugs + wrench; wire range (3) 750 kcmil Cu-Al	**B**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**B**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00305	TCALK261	GE	lug-kit	CURRENT

GE TCALK261 2-lug kit with wrench, K1200/TB6

OEM part number	TCALK261	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	2-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	2 lugs + wrench; wire range (2) 2/0-500 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00309	TCALK281	GE	lug-kit	CURRENT

GE TCALK281 2-lug kit with wrench (TCAL81)

OEM part number	TCALK281	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCALK2812 / TCALK2811 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK2812/TCALK2811'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	S198, S200 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	2-lug kit with wrench	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200/TB8 600-800 A; Spectra SK1200 300-800 A	A	same as above
Kit contents	2 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00320	TCALK291	GE	lug-kit	CURRENT

GE TCALK291 2-lug kit, TK4V load end

OEM part number	TCALK291	B	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK2912 / TCALK2911 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK2912/TCALK2911'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	2-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	2 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00314	TCALK3121	GE	lug-kit	CURRENT

GE TCALK3121 3-lug kit with wrench (TCAL121)

OEM part number	TCALK3121	B	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK31214 / TCALK31212 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK31214/TCALK31212'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1000-1200 A)	B	same as above
Kit contents	3 lugs + wrench; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00318	TCALK3122	GE	lug-kit	CURRENT

GE TCALK3122 3-lug kit (TCAL122)

OEM part number	TCALK3122	B	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK31225 / TCALK31223 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK31225/TCALK31223'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1200 A)	B	same as above
Kit contents	3 lugs + wrench; wire range (3) 750 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00302	TCALK341	GE	lug-kit	DISCONTINUED

GE TCALK341 3-lug kit, K1200/TB6 300-400A

OEM part number	TCALK341	A	S200 s3 p. 3-120; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-400 A)	A	same as above
Kit contents	3 lugs; wire range (2) 1/0-250 kcmil or (1) #4-600 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	discontinued (Not in the 11/13 or 1/19 tables)	C	S198, S200 inference
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00306	TCALK361	GE	lug-kit	CURRENT

GE TCALK361 3-lug kit with wrench, K1200/TB6

OEM part number	TCALK361	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	3 lugs + wrench; wire range (2) 2/0-500 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00310	TCALK381	GE	lug-kit	CURRENT

GE TCALK381 3-lug kit with wrench (TCAL81)

OEM part number	TCALK381	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCALK3812 / TCALK3811 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK3812/TCALK3811'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	S198, S200 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit with wrench	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200/TB8 600-800 A; Spectra SK1200 300-800 A	A	same as above
Kit contents	3 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00321	TCALK391	GE	lug-kit	CURRENT

GE TCALK391 3-lug kit, TK4V load end

OEM part number	TCALK391	B	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK3912 / TCALK3911 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK3912/TCALK3911'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	3 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00315	**TC0121**	GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A	K1200 (1000-1200 A); Spectra SK1200 600-1200 A **A**	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00324	**TC0131**	GE TC0131 copper lug, TK4V load end	TK4V - load end **A**	current
EDH-GEA-00303	**TC041**	GE TC041 copper-only lug, K1200/TB6 300-400A	K1200, TB6 (300-400 A) **A**	current
EDH-GEA-00307	**TC061**	GE TC061 copper-only lug, K1200/TB6 300-600A	K1200, TB6 (300-600 A) **A**	current
EDH-GEA-00311	**TC081A**	GE TC081A copper lug, K1200/TB8/SK1200 600-800A	K1200, TB8 (600-800 A); Spectra SK1200 300-800 A **A**	current
EDH-GEA-00323	**TC091**	GE TC091 copper lug, TK4V load end	TK4V - load end **A**	current
EDH-GEA-00312	**TCAL121**	GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al	K1200 (1000-1200 A); TKMA/THKMA 1000-1200 A **A**	current
EDH-GEA-00316	**TCAL122**	GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al	K1200 (1200 A) **B**	current
EDH-GEA-00322	**TCAL131**	GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al	TK4V - load end **B**	current
EDH-GEA-00301	**TCAL41**	GE TCAL41 lug, K1200/TB6 300-400A	K1200, TB6 (300-400 A) **A**	current
EDH-GEA-00304	**TCAL61**	GE TCAL61 lug, K1200/TB6 300-600A, (2) 2/0-500	K1200, TB6 (300-600 A) **A**	current
EDH-GEA-00308	**TCAL81**	GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500	K1200 / TB8 (600-800 A); TKMA/THKMA 600-800 A; Spectra SK1200 300-800 **A**	current
EDH-GEA-00319	**TCAL91**	GE TCAL91 lug, TK4V load end, (3) 3/0-500	TK4V - load end **B**	current

EDH-GEA-00315 TC0121 GE lug CURRENT

GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A

OEM part number	TC0121	**A**	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCO121 (Printed TCO121 (letter O) in the 2012 Spectra table)	**B**	S200 alias; s3 p. 3-121; oem_spec
Description	Plated copper lug	**A**	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	K1200 (1000-1200 A); Spectra SK1200 600-1200 A	**A**	same as above
Kit contents	1 lug; wire range (4) 250-400 kcmil Cu	**A**	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-102/6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Requires	789A448G2 (EDH-GEA-00329)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00324 TC0131 GE lug CURRENT

GE TC0131 copper lug, TK4V load end

OEM part number	TC0131	**A**	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TK4V - load end	**A**	same as above
Kit contents	1 lug; wire range (4) 250-400 kcmil Cu	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Is this printed as TC0131 (zero) or TCO131 (letter O)? Is there a trailing footnote digit?*		

EDH-GEA-00303	TC041	GE	lug	CURRENT

GE TC041 copper-only lug, K1200/TB6 300-400A

OEM part number	TC041	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TC0416 / TC0414 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TC0416 (2012, fn6 'Not UL listed') / TC0414 (2019, fn4 'Not UL listed')'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. The base number TC041 is printed in the 2012 lug-cover row.)	B	same as above
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-400 A)	A	same as above
Kit contents	1 lug; wire range (1) 1/0-600 kcmil or (2) 1/0-250 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Identification features	Not UL listed (per table footnote) (Taken from the footnote digit appended to the printed part number)	B	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Torque values		

EDH-GEA-00307	TC061	GE	lug	CURRENT

GE TC061 copper-only lug, K1200/TB6 300-600A

OEM part number	TC061	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	1 lug; wire range (2) 2/0-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00311	TC081A	GE	lug	CURRENT

GE TC081A copper lug, K1200/TB8/SK1200 600-800A

OEM part number	TC081A	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCO81A (The 2012 Spectra table prints letter 'O' (TCO81A); the general table prints zero (TC081A).)	B	S200 alias; s3 p. 3-121; oem_spec
Description	Plated copper lug with follower and extra plating	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200, TB8 (600-800 A); Spectra SK1200 300-800 A	A	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu (6-102); (3) 250-500 kcmil (6-103)	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*The two tables give different wire ranges (3/0-500 vs 250-500 kcmil). Which is correct?*		

EDH-GEA-00323	TC091	GE	lug	CURRENT

GE TC091 copper lug, TK4V load end

OEM part number	TC091	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TK4V - load end	A	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00312	TCAL121	GE	lug	CURRENT

GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al

OEM part number	TCAL121	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s3 TKMA 1200A table; oem_spec
Alternate / superseded numbers	TCAL1214 / TCAL1212 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL1214 (2012 fn4) / TCAL1212 (2019 fn2)'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Both footnotes read 'Suitable for 500 kcmil copper for voltage drop considerations'.)	B	S198, S200 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s3 TKMA 1200A table; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200 (1000-1200 A); TKMA/THKMA 1000-1200 A	A	same as above
Kit contents	1 lug; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al (TKMA table: (4) 300-500 Al)	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Requires	789A448G2 (EDH-GEA-00329)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00316	TCAL122	GE	lug	CURRENT

GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al

OEM part number	TCAL122	B	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCAL1225 / TCAL1223 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL1225 (2012 fn5) / TCAL1223 (2019 fn3)'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Both footnotes read 'Not UL listed, requires user supplied lug cover'. The bare base number TCAL122 is not printed anywhere, so it is inferred.)	B	same as above
Description	Copper-aluminum single lug; not UL listed, requires user-supplied lug cover (footnote)	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1200 A)	B	same as above
Kit contents	1 lug; wire range (3) 750 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, lug cover part number (footnote says a user-supplied lug cover is required), Torque values		
Open question	*Confirm that the orderable base number is TCAL122 (for example on a distributor or ABB product page).*		

EDH-GEA-00322	TCAL131	GE	lug	CURRENT

GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al

OEM part number	TCAL131	B	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCAL1314 / TCAL1312 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL1314/TCAL1312'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	Copper-aluminum single lug	B	same as above
Application	accessory	B	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	1 lug; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00301	TCAL41	GE	lug	CURRENT

GE TCAL41 lug, K1200/TB6 300-400A

OEM part number	TCAL41	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-400 A)	A	same as above
Kit contents	1 lug; wire range (2) 1/0-250 kcmil or (1) #4-600 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00304	TCAL61	GE	lug	CURRENT

GE TCAL61 lug, K1200/TB6 300-600A, (2) 2/0-500

OEM part number	TCAL61	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	1 lug; wire range (2) 2/0-500 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00308	TCAL81	GE	lug	CURRENT

GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500

OEM part number	TCAL81	A	S198, S200, S201 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; s1 p. 6-11 cross-ref; oem_spec
Alternate / superseded numbers	TCAL812 / TCAL811 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL812 (2012) / TCAL811 (2019)'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Both footnotes read 'Not suitable for 100 A aluminum conductor'. TCAL81 is printed bare in the Spectra SK1200 table, TKMA tables and lug-cover row.)	B	S198, S200 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Plated extruded aluminum lug for Cu or Al cables (per the Spectra table)	A	S198, S200, S201 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; s1 p. 6-11 cross-ref; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200 / TB8 (600-800 A); TKMA/THKMA 600-800 A; Spectra SK1200 300-800 A; SK800	A	same as above
Current rating	300-800 A (SK1200 table)	A	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu-Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102/6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00319	TCAL91	GE	lug	CURRENT

GE TCAL91 lug, TK4V load end, (3) 3/0-500

OEM part number	TCAL91	B	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCAL912 / TCAL911 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL912/TCAL911'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	Copper-aluminum single lug	B	same as above
Application	accessory	B	same as above
Installation location	Load end of TK4V breaker	A	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00750	**TK102PD1A**	GE plug-in mounting base TK102PD1A (K1200 1000 A 2-pole, SOS studs)	K1200 1000 A 2-pole A	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00751	**TK102PD2A**	GE plug-in mounting base TK102PD2A (K1200 1000 A 2-pole, LOL studs)	K1200 1000 A 2-pole A	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00754	**TK122PD1A**	GE plug-in mounting base TK122PD1A (K1200 1200 A 2-pole, SOS studs)	K1200 1200 A 2-pole A	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00755	**TK122PD2A**	GE plug-in mounting base TK122PD2A (K1200 1200 A 2-pole, LOL studs)	K1200 1200 A 2-pole A	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00742	**TK62PD1A**	GE plug-in mounting base TK62PD1A (K1200 600 A / TB6 2-pole, SOS studs)	K1200 600 A / TB6 2-pole A	Row present in Rev 9/12 plug-in table but absent from Rev 1/

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00743	**TK62PD2A**	GE plug-in mounting base TK62PD2A (K1200 600 A / TB6 2-pole, LOL studs)	K1200 600 A / TB6 2-pole **A**	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00744	**TK63PD1A**	GE plug-in mounting base TK63PD1A (K1200 600 A / TB6 3-pole, SLS studs)	K1200 600 A / TB6 3-pole **A**	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00745	**TK63PD2A**	GE plug-in mounting base TK63PD2A (K1200 600 A / TB6 3-pole, LSL studs)	K1200 600 A / TB6 3-pole **A**	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00746	**TK82PD1A**	GE plug-in mounting base TK82PD1A (K1200 800 A / TB8 2-pole, SOS studs)	K1200 800 A / TB8 2-pole **A**	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00747	**TK82PD2A**	GE plug-in mounting base TK82PD2A (K1200 800 A / TB8 2-pole, LOL studs)	K1200 800 A / TB8 2-pole **A**	Row present in Rev 9/12 plug-in table but absent from Rev 1/

EDH-GEA-00750	**TK102PD1A**	GE	breaker-mounting-kit	**ROW PRESENT IN REV 9/1**

GE plug-in mounting base TK102PD1A (K1200 1000 A 2-pole, SOS studs)

OEM part number	TK102PD1A	**A**	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SOS (PD1 unit) for K1200 1000 A 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	**A**	same as above
Application	Optional mounting plate TMP4; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	**A**	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	K1200 1000 A 2-pole	**A**	S200 Rev 9/12 p.3-123; oem_spec
Current rating	1000 A	**A**	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	**B**	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	**B**	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00751	TK102PD2A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TK102PD2A (K1200 1000 A 2-pole, LOL studs)

OEM part number	TK102PD2A	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LOL (PD2 unit) for K1200 1000 A 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP4; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	K1200 1000 A 2-pole	A	S200 Rev 9/12 p.3-123; oem_spec
Current rating	1000 A	A	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	B	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00754	TK122PD1A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TK122PD1A (K1200 1200 A 2-pole, SOS studs)

OEM part number	TK122PD1A	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SOS (PD1 unit) for K1200 1200 A 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP4; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	K1200 1200 A 2-pole	A	S200 Rev 9/12 p.3-123; oem_spec
Current rating	1200 A	A	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	B	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00755	TK122PD2A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TK122PD2A (K1200 1200 A 2-pole, LOL studs)

OEM part number	TK122PD2A	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LOL (PD2 unit) for K1200 1200 A 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP4; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	K1200 1200 A 2-pole	A	S200 Rev 9/12 p.3-123; oem_spec
Current rating	1200 A	A	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	B	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00742	TK62PD1A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TK62PD1A (K1200 600 A / TB6 2-pole, SOS studs)

OEM part number	TK62PD1A	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SOS (PD1 unit) for K1200 600 A / TB6 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP4 (TMP7 for TB6); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	K1200 600 A / TB6 2-pole	A	S200 Rev 9/12 p.3-123; oem_spec
Current rating	600 A	A	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	B	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00743	TK62PD2A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TK62PD2A (K1200 600 A / TB6 2-pole, LOL studs)

OEM part number	TK62PD2A	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LOL (PD2 unit) for K1200 600 A / TB6 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP4 (TMP7 for TB6); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	K1200 600 A / TB6 2-pole	A	S200 Rev 9/12 p.3-123; oem_spec
Current rating	600 A	A	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	B	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00744	TK63PD1A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TK63PD1A (K1200 600 A / TB6 3-pole, SLS studs)

OEM part number	TK63PD1A	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SLS (PD1 unit) for K1200 600 A / TB6 3-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP4 (TMP7 for TB6); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	K1200 600 A / TB6 3-pole	A	S200 Rev 9/12 p.3-123; oem_spec
Current rating	600 A	A	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	B	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00745	TK63PD2A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TK63PD2A (K1200 600 A / TB6 3-pole, LSL studs)

OEM part number	TK63PD2A	**A**	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LSL (PD2 unit) for K1200 600 A / TB6 3-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	**A**	same as above
Application	Optional mounting plate TMP4 (TMP7 for TB6); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	**A**	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	K1200 600 A / TB6 3-pole	**A**	S200 Rev 9/12 p.3-123; oem_spec
Current rating	600 A	**A**	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	**B**	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	**B**	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00746	TK82PD1A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TK82PD1A (K1200 800 A / TB8 2-pole, SOS studs)

OEM part number	TK82PD1A	**A**	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SOS (PD1 unit) for K1200 800 A / TB8 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	**A**	same as above
Application	Optional mounting plate TMP4 (TMP7 for TB8); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	**A**	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	K1200 800 A / TB8 2-pole	**A**	S200 Rev 9/12 p.3-123; oem_spec
Current rating	800 A	**A**	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	**B**	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	**B**	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00747	TK82PD2A	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TK82PD2A (K1200 800 A / TB8 2-pole, LOL studs)

OEM part number	TK82PD2A	**A**	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LOL (PD2 unit) for K1200 800 A / TB8 2-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	**A**	same as above
Application	Optional mounting plate TMP4 (TMP7 for TB8); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	**A**	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	K1200 800 A / TB8 2-pole	**A**	S200 Rev 9/12 p.3-123; oem_spec
Current rating	800 A	**A**	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	**B**	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	**B**	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00332	**TKMC1**	GE TKMC1 connector (back strap), TKM	TKM **A**	current

EDH-GEA-00332	TKMC1	GE	connector-strap	CURRENT

GE TKMC1 connector (back strap), TKM

OEM part number	TKMC1	**A**	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Connector (back strap)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TKM	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*What is the TKMC1 back strap geometry, and which end of the breaker does it fit?*		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00774	**TMP4**	GE optional plug-in mounting plate TMP4 (K1200/SK800/SK1200 plug-in bases)	K1200/SK800/SK1200 plug-in bases (TK8x/TK10x/TK12x) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00774	TMP4	GE	mounting-bracket	NOT LISTED IN ABB ECAT

GE optional plug-in mounting plate TMP4 (K1200/SK800/SK1200 plug-in bases)

OEM part number	TMP4	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Optional mounting plate for plug-in mounting base assemblies: accurately locates and supports the pair of line and load plug-in bases, attaches the unit to a metal structure and serves as a dead-front barrier; drawings available for customers who fabricate their own plates. Used with K1200/SK800/SK1200 plug-in bases (TK8x/TK10x/TK12x)	A	same as above
Installation location	Behind the dead front; carries the line and load plug-in bases of one breaker	A	S198 6-105; oem_spec
Breaker compatibility	K1200/SK800/SK1200 plug-in bases (TK8x/TK10x/TK12x)	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00724	**343L564G3**	GE mounting screw kit 343L564G3 for motor-operated mechanism / plug-in base (TKM, TB6, TB8, SK)	TKM, TB6, TB8, SK A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00724	343L564G3	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE mounting screw kit 343L564G3 for motor-operated mechanism / plug-in base (TKM, TB6, TB8, SK)

OEM part number	343L564G3	A	S198, S200 Rev 1/19 p.6-99; Rev 9/12 p.3-117; oem_spec
Description	Mounting screw kit for motor-operated mechanism; required with plug-in mounting base assembly when used with motor-operating mechanisms or TDR integral-handle kits; furnished no charge when ordered with mounting base	A	same as above
Breaker compatibility	TKM, TB6, TB8, SK	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra SK (SKHA/SKLA/SKPA), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00331	**286A8066G1**	GE 286A8066G1 lug cover, TH4V/THK9V	TH4V, THK9V A	discontinued
EDH-GEA-00328	**789A448G1**	GE 789A448G1 lug cover, TKM (for TC061/TCAL61/TCAL81/TC081A)	TKM with TC061, TCAL61, TCAL81 or TC081A lugs A	current
EDH-GEA-00329	**789A448G2**	GE 789A448G2 lug cover, TKM (for TC0121/TCAL121)	TKM with TC0121 or TCAL121 lugs A	current
EDH-GEA-00330	**789A448G3**	GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain	TKM with TC041 or TCAL41 lugs C	discontinued
EDH-GEA-00333	**SKLVK**	GE SKLVK line voltage control wire kit, K1200/SK1200	K1200; Spectra SK1200 A	current
EDH-GEA-00394	**TKM11**	GE TKM11 back-connected line/load stud, K1200, TB6, TB8, 5 1/2 in	K1200, TB6, TB8 / SK1200 (1200 A) A	current
EDH-GEA-00395	**TKM12**	GE TKM12 back-connected line/load stud, K1200, TB6, TB8, 8 in	K1200, TB6, TB8 / SK1200 (1200 A) A	current

EDH-GEA-00331	286A8066G1	GE	breaker-accessory	DISCONTINUED

GE 286A8066G1 lug cover, TH4V/THK9V

OEM part number	286A8066G1	A	S200 s3 p. 3-120; oem_spec
Description	Lug cover	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TH4V, THK9V	A	same as above
Status	discontinued (Row absent from the 1/19 table)	C	S198, S200 inference
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00328	789A448G1	GE	breaker-accessory	CURRENT

GE 789A448G1 lug cover, TKM (for TC061/TCAL61/TCAL81/TC081A)

OEM part number	789A448G1	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Lug cover, TKM breaker (two per breaker)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TKM with TC061, TCAL61, TCAL81 or TC081A lugs	A	same as above
Kit contents	two required per breaker	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00329	789A448G2	GE	breaker-accessory	CURRENT

GE 789A448G2 lug cover, TKM (for TC0121/TCAL121)

OEM part number	789A448G2	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Lug cover, TKM breaker (two per breaker)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TKM with TC0121 or TCAL121 lugs	A	same as above
Kit contents	two required per breaker	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00330	789A448G3	GE	breaker-accessory	DISCONTINUED

GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain

OEM part number	789A448G3	C	S200 s3 p. 3-120; oem_spec
Alternate / superseded numbers	789A448G377 (as printed) [alias] (The printed string '789A448G377' probably carries footnote digit(s) 7 ('End cover supplied with 800A frame is used as lug cover'). The base number may be 789A448G3 or 789A448G37.)	C	same as above
Description	Lug cover, TKM breaker (two per breaker)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	TKM with TC041 or TCAL41 lugs	C	same as above
Status	discontinued (Row absent from the 1/19 table)	C	S198, S200 inference
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Is the true number 789A448G3 or 789A448G37?*		

EDH-GEA-00333	SKLVK	GE	breaker-accessory	CURRENT

GE SKLVK line voltage control wire kit, K1200/SK1200

OEM part number	SKLVK	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	SKLVK6 / SKLVK8 (as printed) (The printed number in the cited table has a footnote superscript run into it (e.g. 'SKLVK8/SKLVK6'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. The footnote is '3-pole kit'.)	B	S198, S200 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line voltage control wire kit for terminating control wire at breaker lugs; single .25 quick connect	A	S198, S200 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200; Spectra SK1200	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102/6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00394	TKM11	GE	breaker-accessory	CURRENT

GE TKM11 back-connected line/load stud, K1200, TB6, TB8, 5 1/2 in

OEM part number	TKM11	A	S198 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6, TB8 / SK1200 (1200 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 5 1/2 in	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-101; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00395	TKM12	GE	breaker-accessory	CURRENT

GE TKM12 back-connected line/load stud, K1200, TB6, TB8, 8 in

OEM part number	TKM12	A	S198 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6, TB8 / SK1200 (1200 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 8 in	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-101; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

Breaker family Record Plus FB 100

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00370	**FCALK12**	GE FCALK12 lug kit (set of 3), Record Plus FB/FC 100, 15-20 A	Record Plus FB 100 and FC 100; 15-20 A A	current
EDH-GEA-00372	**FCALK13**	GE FCALK13 lug kit (set of 3), Record Plus FB/FC 100, 25-60 A	Record Plus FB 100 and FC 100; 25-60 A A	current
EDH-GEA-00374	**FCALK14**	GE FCALK14 lug kit (set of 3), Record Plus FB/FC 100, 70-100 A	Record Plus FB 100 and FC 100; 70-100 A A	current

EDH-GEA-00370 FCALK12 GE lug-kit CURRENT

GE FCALK12 lug kit (set of 3), Record Plus FB/FC 100, 15-20 A

OEM part number	FCALK12	A	S198 s1 p. 6-73, 6-78; oem_spec
Description	Lug kit, set of 3; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 15-20 A	A	same as above
Current rating	15-20 A	A	same as above
Kit contents	3 lugs; wire range 14-10 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00372 FCALK13 GE lug-kit CURRENT

GE FCALK13 lug kit (set of 3), Record Plus FB/FC 100, 25-60 A

OEM part number	FCALK13	A	S198 s1 p. 6-73, 6-78; oem_spec
Description	Lug kit, set of 3; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 25-60 A	A	same as above
Current rating	25-60 A	A	same as above
Kit contents	3 lugs; wire range 10-4 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00374 FCALK14 GE lug-kit CURRENT

GE FCALK14 lug kit (set of 3), Record Plus FB/FC 100, 70-100 A

OEM part number	FCALK14	A	S198 s1 p. 6-73, 6-78; oem_spec
Description	Lug kit, set of 3; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 70-100 A	A	same as above
Current rating	70-100 A	A	same as above
Kit contents	3 lugs; wire range 4-1/0 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00369	**FCAL12**	GE FCAL12 single lug, Record Plus FB/FC 100, 15-20 A	Record Plus FB 100 and FC 100; 15-20 A A	current
EDH-GEA-00371	**FCAL13**	GE FCAL13 single lug, Record Plus FB/FC 100, 25-60 A	Record Plus FB 100 and FC 100; 25-60 A A	current
EDH-GEA-00373	**FCAL14**	GE FCAL14 single lug, Record Plus FB/FC 100, 70-100 A	Record Plus FB 100 and FC 100; 70-100 A A	current

EDH-GEA-00369 **FCAL12** GE lug **CURRENT**

GE FCAL12 single lug, Record Plus FB/FC 100, 15-20 A

OEM part number	FCAL12	A	S198 s1 p. 6-73, 6-78; oem_spec
Description	Single lug; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 15-20 A	A	same as above
Current rating	15-20 A	A	same as above
Kit contents	1 lug; wire range 14-10 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00371 **FCAL13** GE lug **CURRENT**

GE FCAL13 single lug, Record Plus FB/FC 100, 25-60 A

OEM part number	FCAL13	A	S198 s1 p. 6-73, 6-78; oem_spec
Description	Single lug; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 25-60 A	A	same as above
Current rating	25-60 A	A	same as above
Kit contents	1 lug; wire range 10-4 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00373 **FCAL14** GE lug **CURRENT**

GE FCAL14 single lug, Record Plus FB/FC 100, 70-100 A

OEM part number	FCAL14	A	S198 s1 p. 6-73, 6-78; oem_spec
Description	Single lug; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 70-100 A	A	same as above
Current rating	70-100 A	A	same as above
Kit contents	1 lug; wire range 4-1/0 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Breaker family Record Plus FC (FCS/FCV/FCN/FCH/FCL)

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00796	**FCDDF1**	GE Record Plus FC100 plug-in base kit FCDDF1 (3-pole, LSL, horizontal strap)	Record Plus FC100 (FCS/FCV/FCN/FCH/FCL) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00797	**FCDDF2**	GE Record Plus FC100 plug-in base kit FCDDF2 (3-pole, SLS, horizontal strap)	Record Plus FC100 (FCS/FCV/FCN/FCH/FCL) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00798	**FCDDF3**	GE Record Plus FC100 plug-in base kit FCDDF3 (3-pole, LSL, vertical strap)	Record Plus FC100 (FCS/FCV/FCN/FCH/FCL) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00799	**FCDDF4**	GE Record Plus FC100 plug-in base kit FCDDF4 (3-pole, SLS, vertical strap)	Record Plus FC100 (FCS/FCV/FCN/FCH/FCL) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00796 **FCDDF1** GE breaker-mounting-kit **NOT LISTED IN ABB ECAT**

GE Record Plus FC100 plug-in base kit FCDDF1 (3-pole, LSL, horizontal strap)

OEM part number	FCDDF1	**A**	S198, S200 Rev 1/19 p.6-77; Rev 9/12 p.3-99; oem_spec
Description	Complete plug-in base kit, 3-pole, LSL stud assembly, horizontal strap, for Record Plus FC100 breakers; two plug-in bases (one per terminal end) required per breaker	**A**	same as above
Breaker compatibility	Record Plus FC100 (FCS/FCV/FCN/FCH/FCL)	**A**	same as above
Current rating	100 A	**A**	S648 p.4 Table 2; oem_spec
Kit contents	Per DEH40915 Table 1: plug-in base assembly (1), screws #10-32 x 0.625 in (3), lock washers (5), washers (5), male plugs (3), screws #10-24 x 1.75 in (2), nuts #10-24 (2); mounting plate (FCDMP) and secondary disconnect kit (FCDSD = FCDSDP + FCDSDB) ordered separately	**A**	S648 p.2 Table 1; oem_spec
Dimensions	Outline/drilling dimensions given in DEH40915 Table 2 / Figures 8-9 (e.g. 2.36 in, 2.2 in, 3.54 in, 5.54 in, 8.27 in values; letter mapping not recoverable from text rendering) (text extraction scrambles the dimension table; consult PDF figure)	**C**	S648 p.4-5; oem_drawing
Fasteners	Breaker mounted with #8-32 x 2.875 in screws; mounting screws must be class 2 threads free of burrs	**A**	S648 p.3 note; oem_spec
Torque values	Male plugs to breaker terminals (#10-32 screws) 27-32 in-lb; plug-in base to support (#10-24 screws) 23-28 in-lb; secondary disconnect breaker adaptor (#4-40) 5-6 in-lb; secondary disconnect base (#8-32 thread-cutting) 16-20 in-lb	**A**	S648 p.3; oem_spec
OEM instruction document	DEH40915 (Record Plus Plug-In Base FC100); breaker install DEH40463	**A**	S648 p.1, p.5; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Finish / plating, Material		

EDH-GEA-00797	FCDDF2	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE Record Plus FC100 plug-in base kit FCDDF2 (3-pole, SLS, horizontal strap)

OEM part number	FCDDF2	A	S198, S200 Rev 1/19 p.6-77; Rev 9/12 p.3-99; oem_spec
Description	Complete plug-in base kit, 3-pole, SLS stud assembly, horizontal strap, for Record Plus FC100 breakers; two plug-in bases (one per terminal end) required per breaker	A	same as above
Breaker compatibility	Record Plus FC100 (FCS/FCV/FCN/FCH/FCL)	A	same as above
Current rating	100 A	A	S648 p.4 Table 2; oem_spec
Kit contents	Per DEH40915 Table 1: plug-in base assembly (1), screws #10-32 x 0.625 in (3), lock washers (5), washers (5), male plugs (3), screws #10-24 x 1.75 in (2), nuts #10-24 (2); mounting plate (FCDMP) and secondary disconnect kit (FCDSD = FCDSDP + FCDSDB) ordered separately	A	S648 p.2 Table 1; oem_spec
Dimensions	Outline/drilling dimensions given in DEH40915 Table 2 / Figures 8-9 (e.g. 2.36 in, 2.2 in, 3.54 in, 5.54 in, 8.27 in values; letter mapping not recoverable from text rendering) (text extraction scrambles the dimension table; consult PDF figure)	C	S648 p.4-5; oem_drawing
Fasteners	Breaker mounted with #8-32 x 2.875 in screws; mounting screws must be class 2 threads free of burrs	A	S648 p.3 note; oem_spec
Torque values	Male plugs to breaker terminals (#10-32 screws) 27-32 in-lb; plug-in base to support (#10-24 screws) 23-28 in-lb; secondary disconnect breaker adaptor (#4-40) 5-6 in-lb; secondary disconnect base (#8-32 thread-cutting) 16-20 in-lb	A	S648 p.3; oem_spec
OEM instruction document	DEH40915 (Record Plus Plug-In Base FC100); breaker install DEH40463	A	S648 p.1, p.5; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Finish / plating, Material		
Open question	*DEH40915 figure labels "Horizontal Studs FCDDF1 (LSL) FCDDF4 (SLS)" - apparent typo for FCDDF2; confirm.*		

EDH-GEA-00798	FCDDF3	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE Record Plus FC100 plug-in base kit FCDDF3 (3-pole, LSL, vertical strap)

OEM part number	FCDDF3	A	S198, S200 Rev 1/19 p.6-77; Rev 9/12 p.3-99; oem_spec
Description	Complete plug-in base kit, 3-pole, LSL stud assembly, vertical strap, for Record Plus FC100 breakers; two plug-in bases (one per terminal end) required per breaker	A	same as above
Breaker compatibility	Record Plus FC100 (FCS/FCV/FCN/FCH/FCL)	A	same as above
Current rating	100 A	A	S648 p.4 Table 2; oem_spec
Kit contents	Per DEH40915 Table 1: plug-in base assembly (1), screws #10-32 x 0.625 in (3), lock washers (5), washers (5), male plugs (3), screws #10-24 x 1.75 in (2), nuts #10-24 (2); mounting plate (FCDMP) and secondary disconnect kit (FCDSD = FCDSDP + FCDSDB) ordered separately	A	S648 p.2 Table 1; oem_spec
Dimensions	Outline/drilling dimensions given in DEH40915 Table 2 / Figures 8-9 (e.g. 2.36 in, 2.2 in, 3.54 in, 5.54 in, 8.27 in values; letter mapping not recoverable from text rendering) (text extraction scrambles the dimension table; consult PDF figure)	C	S648 p.4-5; oem_drawing
Fasteners	Breaker mounted with #8-32 x 2.875 in screws; mounting screws must be class 2 threads free of burrs	A	S648 p.3 note; oem_spec
Torque values	Male plugs to breaker terminals (#10-32 screws) 27-32 in-lb; plug-in base to support (#10-24 screws) 23-28 in-lb; secondary disconnect breaker adaptor (#4-40) 5-6 in-lb; secondary disconnect base (#8-32 thread-cutting) 16-20 in-lb	A	S648 p.3; oem_spec
OEM instruction document	DEH40915 (Record Plus Plug-In Base FC100); breaker install DEH40463	A	S648 p.1, p.5; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Finish / plating, Material		

EDH-GEA-00799	FCDDF4	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE Record Plus FC100 plug-in base kit FCDDF4 (3-pole, SLS, vertical strap)

OEM part number	FCDDF4	A	S198, S200 Rev 1/19 p.6-77; Rev 9/12 p.3-99; oem_spec
Description	Complete plug-in base kit, 3-pole, SLS stud assembly, vertical strap, for Record Plus FC100 breakers; two plug-in bases (one per terminal end) required per breaker	A	same as above
Breaker compatibility	Record Plus FC100 (FCS/FCV/FCN/FCH/FCL)	A	same as above
Current rating	100 A	A	S648 p.4 Table 2; oem_spec
Kit contents	Per DEH40915 Table 1: plug-in base assembly (1), screws #10-32 x 0.625 in (3), lock washers (5), washers (5), male plugs (3), screws #10-24 x 1.75 in (2), nuts #10-24 (2); mounting plate (FCDMP) and secondary disconnect kit (FCDSD = FCDSDP + FCDSDB) ordered separately	A	S648 p.2 Table 1; oem_spec
Dimensions	Outline/drilling dimensions given in DEH40915 Table 2 / Figures 8-9 (e.g. 2.36 in, 2.2 in, 3.54 in, 5.54 in, 8.27 in values; letter mapping not recoverable from text rendering) (text extraction scrambles the dimension table; consult PDF figure)	C	S648 p.4-5; oem_drawing
Fasteners	Breaker mounted with #8-32 x 2.875 in screws; mounting screws must be class 2 threads free of burrs	A	S648 p.3 note; oem_spec
Torque values	Male plugs to breaker terminals (#10-32 screws) 27-32 in-lb; plug-in base to support (#10-24 screws) 23-28 in-lb; secondary disconnect breaker adaptor (#4-40) 5-6 in-lb; secondary disconnect base (#8-32 thread-cutting) 16-20 in-lb	A	S648 p.3; oem_spec
OEM instruction document	DEH40915 (Record Plus Plug-In Base FC100); breaker install DEH40463	A	S648 p.1, p.5; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Finish / plating, Material		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00803	**FCDMP**	GE Record Plus FC100 plug-in accessory FCDMP	Record Plus FC100 A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00803	FCDMP	GE	mounting-bracket	NOT LISTED IN ABB ECAT

GE Record Plus FC100 plug-in accessory FCDMP

OEM part number	FCDMP	A	S198, S200 Rev 1/19 p.6-77; Rev 9/12 p.3-99; oem_spec
Description	Mounting plate for FC100 plug-in base; optional, used for dead-front panel construction and as template for mounting plug-in bases	A	same as above
Breaker compatibility	Record Plus FC100	A	same as above
OEM instruction document	DEH40915	A	S648 p.2-3; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00804	**FCMSK3**	GE Record Plus FC hardware FCMSK3	Record Plus FC100 (FC frame) A	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00805	**FCMSK4**	GE Record Plus FC hardware FCMSK4	Record Plus FC100 (FC frame) A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00804	FCMSK3	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE Record Plus FC hardware FCMSK3

OEM part number	FCMSK3	A	S198, S200 Rev 1/19 p.6-77; Rev 9/12 p.3-99; oem_spec
Description	Mounting screws for mounting plates with tapped holes, quantity 4 (#8-32 x 2 7/8 in screws with lockwashers)	A	same as above
Breaker compatibility	Record Plus FC100 (FC frame)	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00805	FCMSK4	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE Record Plus FC hardware FCMSK4

OEM part number	FCMSK4	A	S198, S200 Rev 1/19 p.6-77; Rev 9/12 p.3-99; oem_spec
Description	Mounting screws for mounting plates with clearance holes, quantity 4 (#8-32 x 3 in screws with nuts, lockwashers)	A	same as above
Breaker compatibility	Record Plus FC100 (FC frame)	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00806	**FCNP3**	GE Record Plus FC hardware FCNP3	Record Plus FC100 (FC frame) A	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00807	**FCNPB**	GE Record Plus FC hardware FCNPB	Record Plus FC100 (FC frame) A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00806	FCNP3	GE	fastener	NOT LISTED IN ABB ECAT

GE Record Plus FC hardware FCNP3

OEM part number	FCNP3	A	S198, S200 Rev 1/19 p.6-77; Rev 9/12 p.3-99; oem_spec
Description	Nut plates (quantity 3)	A	same as above
Breaker compatibility	Record Plus FC100 (FC frame)	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00807	FCNPB	GE	fastener	NOT LISTED IN ABB ECAT

GE Record Plus FC hardware FCNPB

OEM part number	FCNPB	A	S198, S200 Rev 1/19 p.6-77; Rev 9/12 p.3-99; oem_spec
Description	Nut plates (quantity 36)	A	same as above
Breaker compatibility	Record Plus FC100 (FC frame)	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00800	**FCDSD**	GE Record Plus FC100 plug-in accessory FCDSD	Record Plus FC100 **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00802	**FCDSDB**	GE Record Plus FC100 plug-in accessory FCDSDB	Record Plus FC100 **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00801	**FCDSDP**	GE Record Plus FC100 plug-in accessory FCDSDP	Record Plus FC100 **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00800	**FCDSD**	GE	breaker-accessory	NOT LISTED IN ABB ECAT

GE Record Plus FC100 plug-in accessory FCDSD

OEM part number	FCDSD	**A**	S198, S200 Rev 1/19 p.6-77; Rev 9/12 p.3-99; oem_spec
Description	Secondary disconnect kit for FC100 plug-in base (base part FCDSDP + breaker part FCDSDB)	**A**	same as above
Breaker compatibility	Record Plus FC100	**A**	same as above
OEM instruction document	DEH40915	**A**	S648 p.2-3; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00802	**FCDSDB**	GE	breaker-accessory	NOT LISTED IN ABB ECAT

GE Record Plus FC100 plug-in accessory FCDSDB

OEM part number	FCDSDB	**A**	S198, S200 Rev 1/19 p.6-77; Rev 9/12 p.3-99; oem_spec
Description	Secondary disconnect - breaker part (breaker adaptor assembly), fastened to breaker base with #4-40 x 0.312 in screw	**A**	same as above
Breaker compatibility	Record Plus FC100	**A**	same as above
OEM instruction document	DEH40915	**A**	S648 p.2-3; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00801	**FCDSDP**	GE	breaker-accessory	NOT LISTED IN ABB ECAT

GE Record Plus FC100 plug-in accessory FCDSDP

OEM part number	FCDSDP	**A**	S198, S200 Rev 1/19 p.6-77; Rev 9/12 p.3-99; oem_spec
Description	Secondary disconnect - base part (bottom half), fastened to support or mounting plate with #8-32 x 0.375 in thread-cutting screw	**A**	same as above
Breaker compatibility	Record Plus FC100	**A**	same as above
OEM instruction document	DEH40915	**A**	S648 p.2-3; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Breaker family Record Plus FE 250

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00376	**FCALK15**	GE FCALK15 lug kit (3 lugs + lug cover), Record Plus FE (150 A)	Record Plus FE 250; 150 A **A**	current
EDH-GEA-00377	**FCALK15LV**	GE FCALK15LV lug kit with control wire terminal, Record Plus FE (150 A)	Record Plus FE 250; 150 A **A**	current
EDH-GEA-00379	**FCALK16**	GE FCALK16 lug kit (3 lugs + lug cover), Record Plus FE (250 A)	Record Plus FE 250; 250 A **A**	current
EDH-GEA-00380	**FCALK16LV**	GE FCALK16LV lug kit with control wire terminal, Record Plus FE (250 A)	Record Plus FE 250; 250 A **A**	current

EDH-GEA-00376 **FCALK15** GE lug-kit **CURRENT**

GE FCALK15 lug kit (3 lugs + lug cover), Record Plus FE (150 A)

OEM part number	FCALK15	**A**	S198 s1 p. 6-81; oem_spec
Description	Lug kit: 3 lugs + lug cover	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FE 250; 150 A	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	3 lugs + lug cover; wire range #14-3/0 Cu/Al	**A**	same as above
Torque values	Lug torque 150 in-lb max	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00377 **FCALK15LV** GE lug-kit **CURRENT**

GE FCALK15LV lug kit with control wire terminal, Record Plus FE (150 A)

OEM part number	FCALK15LV	**A**	S198 s1 p. 6-81; oem_spec
Description	Lug kit with control wire terminal	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FE 250; 150 A	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	lug kit with control wire terminal; wire range #14-3/0 Cu/Al	**A**	same as above
Torque values	Lug torque 150 in-lb max	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00379 **FCALK16** GE lug-kit **CURRENT**

GE FCALK16 lug kit (3 lugs + lug cover), Record Plus FE (250 A)

OEM part number	FCALK16	**A**	S198 s1 p. 6-81; oem_spec
Description	Lug kit: 3 lugs + lug cover	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FE 250; 250 A	**A**	same as above
Current rating	250 A	**A**	same as above
Kit contents	3 lugs + lug cover; wire range #8-250 MCM Cu / #8-350 MCM Al	**A**	same as above
Torque values	Lug torque 275 in-lb max	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00380	FCALK16LV	GE	lug-kit	CURRENT

GE FCALK16LV lug kit with control wire terminal, Record Plus FE (250 A)

OEM part number	FCALK16LV	A	S198 s1 p. 6-81; oem_spec
Description	Lug kit with control wire terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FE 250; 250 A	A	same as above
Current rating	250 A	A	same as above
Kit contents	lug kit with control wire terminal; wire range #8-250 MCM Cu / #8-350 MCM Al	A	same as above
Torque values	Lug torque 275 in-lb max	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00375	**FCAL15**	GE FCAL15 single lug, Record Plus FE 250 (150 A)	Record Plus FE 250; 150 A A	current
EDH-GEA-00378	**FCAL16**	GE FCAL16 single lug, Record Plus FE 250 (250 A)	Record Plus FE 250; 250 A A	current

EDH-GEA-00375	FCAL15	GE	lug	CURRENT

GE FCAL15 single lug, Record Plus FE 250 (150 A)

OEM part number	FCAL15	A	S198 s1 p. 6-81; oem_spec
Description	Single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FE 250; 150 A	A	same as above
Current rating	150 A	A	same as above
Kit contents	1 lug; wire range #14-3/0 Cu/Al	A	same as above
Torque values	Lug torque 150 in-lb max	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00378	FCAL16	GE	lug	CURRENT

GE FCAL16 single lug, Record Plus FE 250 (250 A)

OEM part number	FCAL16	A	S198 s1 p. 6-81; oem_spec
Description	Single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FE 250; 250 A	A	same as above
Current rating	250 A	A	same as above
Kit contents	1 lug; wire range #8-250 MCM Cu / #8-350 MCM Al	A	same as above
Torque values	Lug torque 275 in-lb max	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00808	**FEMSK2**	GE Record Plus FE250 mounting screw kit FEMSK2	Record Plus FE250 A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00809	**FEMSK3**	GE Record Plus FE250 mounting screw kit FEMSK3	Record Plus FE250 **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00810	**FEMSK4**	GE Record Plus FE250 mounting screw kit FEMSK4	Record Plus FE250 **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00808 **FEMSK2** GE hardware-kit **NOT LISTED IN ABB ECAT**

GE Record Plus FE250 mounting screw kit FEMSK2

OEM part number	FEMSK2	**A**	S200 Rev 9/12 p.3-103; oem_spec
Description	Mounting screw kit (#10) for clearance holes	**A**	same as above
Breaker compatibility	Record Plus FE250	**A**	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00809 **FEMSK3** GE hardware-kit **NOT LISTED IN ABB ECAT**

GE Record Plus FE250 mounting screw kit FEMSK3

OEM part number	FEMSK3	**A**	S200 Rev 9/12 p.3-103; oem_spec
Description	Mounting screw kit (#8) for tapped holes	**A**	same as above
Breaker compatibility	Record Plus FE250	**A**	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00810 **FEMSK4** GE hardware-kit **NOT LISTED IN ABB ECAT**

GE Record Plus FE250 mounting screw kit FEMSK4

OEM part number	FEMSK4	**A**	S200 Rev 9/12 p.3-103; oem_spec
Description	Mounting screw kit (#8) - printed "for Tapped Holes" (same as FEMSK3; probably clearance holes)	**A**	same as above
Breaker compatibility	Record Plus FE250	**A**	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		
Open question	*Rev 9/12 prints FEMSK3 and FEMSK4 both as "#8 for Tapped Holes"; FEMSK4 is probably #8 clearance-hole kit - verify.*		

Breaker family Record Plus FG (FGV/FGN/FGH/FGL/FGP)

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00811	**FGMSK1**	GE Record Plus FG600 mounting hardware kit FGMSK1	Record Plus FG (FG400/FG600) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00812	**FGMSK2**	GE Record Plus FG600 mounting hardware kit FGMSK2	Record Plus FG (FG400/FG600) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00811	FGMSK1	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE Record Plus FG600 mounting hardware kit FGMSK1

OEM part number	FGMSK1	A	S198, S200 Rev 1/19 p.6-88; Rev 9/12 p.3-110; oem_spec
Description	Hardware kit (tapped holes) - breaker mounting screw kit for FG frame	A	same as above
Breaker compatibility	Record Plus FG (FG400/FG600)	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		
Open question	*Confirm screw size/qty; Rev 1/19 lists under FG "Other Accessories".*		

EDH-GEA-00812	FGMSK2	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE Record Plus FG600 mounting hardware kit FGMSK2

OEM part number	FGMSK2	A	S198, S200 Rev 1/19 p.6-88; Rev 9/12 p.3-110; oem_spec
Description	Hardware kit (through holes) - breaker mounting screw kit for FG frame	A	same as above
Breaker compatibility	Record Plus FG (FG400/FG600)	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		
Open question	*Confirm screw size/qty; Rev 1/19 lists under FG "Other Accessories".*		

Breaker family Record Plus FG 600

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00381	**FCALK218H**	GE FCALK218H 2-pole lug kit, Record Plus FG 600	Record Plus FG 600, 2-pole A	current
EDH-GEA-00382	**FCALK318H**	GE FCALK318H 3-pole lug kit, Record Plus FG 600	Record Plus FG 600, 3-pole A	current

EDH-GEA-00381	FCALK218H	GE	lug-kit	CURRENT

GE FCALK218H 2-pole lug kit, Record Plus FG 600

OEM part number	FCALK218H	A	S198 s1 p. 6-88; oem_spec
Description	2-pole lug kit for FG600, top and bottom lug types	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FG 600, 2-pole	A	same as above
Poles	2	A	same as above
Kit contents	wire range Top: wire #8-400 kcmil Cu / #6-500 kcmil Al, lug-strap #8-#4 AWG Cu/Al; Bottom: wire #2/0-600 kcmil Cu/Al, lug-strap #3 AWG-600 kcmil Cu/Al	A	same as above
Torque values	Top: wire-lug 275 lb-in (31 N-m), lug-strap 200 lb-in (23 N-m); bottom: wire-lug 375 lb-in (42 N-m), lug-strap 200 lb-in (23 N-m); strip length 7/8 in top, 1 5/8 in bottom	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		
Open question	*How many lugs are in the kit, and are the top and bottom lugs different parts?*		

EDH-GEA-00382	FCALK318H	GE	lug-kit	CURRENT

GE FCALK318H 3-pole lug kit, Record Plus FG 600

OEM part number	FCALK318H	A	S198 s1 p. 6-88; oem_spec
Description	3-pole lug kit for FG600 (table lists FCALK218H/FCALK318H against the 3-pole row)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FG 600, 3-pole	A	same as above
Poles	3	A	same as above
Kit contents	wire range Top: wire #8-400 kcmil Cu / #6-500 kcmil Al, lug-strap #8-#4 AWG Cu/Al; Bottom: wire #2/0-600 kcmil Cu/Al, lug-strap #3 AWG-600 kcmil Cu/Al	A	same as above
Torque values	Top: wire-lug 275 lb-in (31 N-m), lug-strap 200 lb-in (23 N-m); bottom: wire-lug 375 lb-in (42 N-m), lug-strap 200 lb-in (23 N-m); strip length 7/8 in top, 1 5/8 in bottom	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00384	**FGJS3**	GE FGJS3 terminal shield fin cover, Record Plus FG	Record Plus FG 600 A	current

EDH-GEA-00384	FGJS3	GE	barrier	CURRENT

GE FGJS3 terminal shield fin cover, Record Plus FG

OEM part number	FGJS3	A	S198 s1 p. 6-88; oem_spec
Description	Terminal shield fin cover	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FG 600	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00383	**FGH1LCK**	GE FGH1LCK lug cover kit, Record Plus FG	Record Plus FG 600 A	current
EDH-GEA-00385	**FGJN3**	GE FGJN3 nut plate / terminal shoe, Record Plus FG	Record Plus FG 600 A	current

EDH-GEA-00383	FGH1LCK	GE	breaker-accessory	CURRENT

GE FGH1LCK lug cover kit, Record Plus FG

OEM part number	FGH1LCK	A	S198 s1 p. 6-88; oem_spec
Description	Lug cover kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FG 600	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00385	FGJN3	GE	breaker-accessory	CURRENT

GE FGJN3 nut plate / terminal shoe, Record Plus FG

OEM part number	FGJN3	A	S198 s1 p. 6-88; oem_spec
Description	Nut plate / terminal shoe	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FG 600	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SE150

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00364	**TCAL19PD3**	GE TCAL19PD3 3-lug power distribution kit, SE1/TED	SE1, TED; max 125 A A	current
EDH-GEA-00336	**TCALK318**	GE TCALK318 3-lug kit, Spectra SE150	Spectra RMS SE150 A	current

EDH-GEA-00364	TCAL19PD3	GE	lug-kit	CURRENT

GE TCAL19PD3 3-lug power distribution kit, SE1/TED

OEM part number	TCAL19PD3	A	S198, S200 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S198 s1 p. 6-104; oem_spec
Breaker compatibility	SE1, TED; max 125 A	A	S198, S200 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	125 A max	A	same as above
Kit contents	3-lug power distribution kit; wire range (2) 4-14 or (1) 2/0-4 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SE150, E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00336	TCALK318	GE	lug-kit	CURRENT

GE TCALK318 3-lug kit, Spectra SE150

OEM part number	TCALK318	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Current rating	15-150 A	A	same as above
Kit contents	3 lugs; wire range (1) #12-3/0 Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00354	**TC018**	GE TC018 (TCO18) plated copper lug, SE150	Spectra RMS SE150 **A**	current
EDH-GEA-00335	**TCAL18**	GE TCAL18 lug, Spectra SE150, (1) #12-3/0	Spectra RMS SE150 **A**	current
EDH-GEA-00360	**TCAL18LV**	GE TCAL18LV lug with control-voltage quick connect, SE150	Spectra RMS SE150 **A**	current
EDH-GEA-00363	**TCAL19PD1**	GE TCAL19PD1 power distribution lug, SE1/TED 125A	SE1, TED; max 125 A **A**	current

EDH-GEA-00354 TC018 GE lug CURRENT

GE TC018 (TCO18) plated copper lug, SE150

OEM part number	TC018	**A**	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCO18 (2012 prints TCO18 (letter O); 2019 prints TC018)	**B**	S200 alias; s3 p. 3-121; oem_spec
Description	Plated copper lug	**A**	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	Spectra RMS SE150	**A**	same as above
Current rating	15-150 A	**A**	same as above
Kit contents	1 lug; wire range (1) #12-3/0 Cu	**A**	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00335 TCAL18 GE lug CURRENT

GE TCAL18 lug, Spectra SE150, (1) #12-3/0

OEM part number	TCAL18	**A**	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug for terminating copper or aluminum cables	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Spectra RMS SE150	**A**	same as above
Current rating	15-150 A	**A**	same as above
Kit contents	1 lug; wire range (1) #12-3/0 Cu or Al	**A**	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00360 TCAL18LV GE lug CURRENT

GE TCAL18LV lug with control-voltage quick connect, SE150

OEM part number	TCAL18LV	**A**	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Line voltage control wire kit: single lug with .25 quick connect for control voltage	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Spectra RMS SE150	**A**	same as above
Current rating	15-150 A	**A**	same as above
Kit contents	1 lug with .25 in quick-connect tab; wire range (1) #12-3/0 Cu or Al	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00363	TCAL19PD1	GE	lug	CURRENT

GE TCAL19PD1 power distribution lug, SE1/TED 125A

OEM part number	TCAL19PD1	A	S198, S200 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S198 s1 p. 6-104; oem_spec
Breaker compatibility	SE1, TED; max 125 A	A	S198, S200 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	125 A max	A	same as above
Kit contents	1 power distribution lug; wire range (2) 4-14 or (1) 2/0-4 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SE150, E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00347	**SE3LCK**	GE SE3LCK lug cover kit, SE150 line end	Spectra RMS SE150 A	current
EDH-GEA-00348	**SE3LCKL**	GE SE3LCKL lug cover kit, SE150 (modified for SEFR1 handle)	Spectra RMS SE150 with SEFR1 handle A	current

EDH-GEA-00347	SE3LCK	GE	breaker-accessory	CURRENT

GE SE3LCK lug cover kit, SE150 line end

OEM part number	SE3LCK	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Three lug covers for upper (line) end	A	same as above
Application	accessory	A	same as above
Installation location	Upper (line) end	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Kit contents	3 lug covers	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00348	SE3LCKL	GE	breaker-accessory	CURRENT

GE SE3LCKL lug cover kit, SE150 (modified for SEFR1 handle)

OEM part number	SE3LCKL	A	S198 s1 p. 6-103; oem_spec
Description	SE150 lug cover kit (modified for SEFR1 handle)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150 with SEFR1 handle	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SF250

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00366	**TCAL28PD3**	GE TCAL28PD3 3-lug power distribution kit, SF	SF; max 250 A **A**	current
EDH-GEA-00338	**TCALK329**	GE TCALK329 3-lug kit, Spectra SF250	Spectra RMS SF250 **A**	current

EDH-GEA-00366 **TCAL28PD3** GE lug-kit **CURRENT**

GE TCAL28PD3 3-lug power distribution kit, SF

OEM part number	TCAL28PD3	**A**	S198, S200 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	**A**	same as above
Application	accessory	**A**	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	**A**	S198 s1 p. 6-104; oem_spec
Breaker compatibility	SF; max 250 A	**A**	S198, S200 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	250 A max	**A**	same as above
Kit contents	3-lug power distribution kit; wire range (6) 4-14 Cu only	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00338 **TCALK329** GE lug-kit **CURRENT**

GE TCALK329 3-lug kit, Spectra SF250

OEM part number	TCALK329	**A**	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Spectra RMS SF250	**A**	same as above
Current rating	70-250 A	**A**	same as above
Kit contents	3 lugs; wire range (1) #8-350 kcmil Cu or Al	**A**	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00365	**TCAL28PD1**	GE TCAL28PD1 power distribution lug, SF 250A	SF; max 250 A **A**	current
EDH-GEA-00337	**TCAL29**	GE TCAL29 lug, Spectra SF250, (1) #8-350 kcmil	Spectra RMS SF250 **A**	current
EDH-GEA-00361	**TCAL29LV**	GE TCAL29LV lug with control-voltage quick connect, SF250	Spectra RMS SF250 **A**	current
EDH-GEA-00355	**TCO29**	GE TCO29 plated copper lug, SF250	Spectra RMS SF250 **A**	current

EDH-GEA-00365	TCAL28PD1	GE	lug	CURRENT

GE TCAL28PD1 power distribution lug, SF 250A

OEM part number	TCAL28PD1	A	S198, S200 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S198 s1 p. 6-104; oem_spec
Breaker compatibility	SF; max 250 A	A	S198, S200 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	250 A max	A	same as above
Kit contents	1 power distribution lug; wire range (6) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00337	TCAL29	GE	lug	CURRENT

GE TCAL29 lug, Spectra SF250, (1) #8-350 kcmil

OEM part number	TCAL29	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	1 lug; wire range (1) #8-350 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00361	TCAL29LV	GE	lug	CURRENT

GE TCAL29LV lug with control-voltage quick connect, SF250

OEM part number	TCAL29LV	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Line voltage control wire kit: single lug with .25 quick connect for control voltage	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	1 lug with .25 in quick-connect tab; wire range (1) #8-350 kcmil Cu or Al	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00355	TCO29	GE	lug	CURRENT

GE TCO29 plated copper lug, SF250

OEM part number	TCO29	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	1 lug; wire range (1) #8-350 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00349	**SF3LCK**	GE SF3LCK lug cover kit, SF250 line end	Spectra RMS SF250 A	current

EDH-GEA-00349	SF3LCK	GE	breaker-accessory	CURRENT

GE SF3LCK lug cover kit, SF250 line end

OEM part number	SF3LCK	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Three lug covers for upper (line) end	A	same as above
Application	accessory	A	same as above
Installation location	Upper (line) end	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Kit contents	3 lug covers	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SG600

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00368	**TCAL40PD3**	GE TCAL40PD3 3-lug power distribution kit, SG	SG; max 400 A A	current
EDH-GEA-00339	**TCLK265**	GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)	Spectra RMS SG600/SG400, 2-pole (SGD/SGH/SGL/SGP) A	current
EDH-GEA-00340	**TCLK365**	GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)	Spectra RMS SG600/SG400, 3-pole A	current
EDH-GEA-00356	**TCOK265**	GE TCOK265 2-pole copper lug kit, SG600	Spectra RMS SG600 A	current
EDH-GEA-00357	**TCOK365**	GE TCOK365 3-pole copper lug kit, SG600	Spectra RMS SG600 A	current

EDH-GEA-00368	TCAL40PD3	GE	lug-kit	CURRENT

GE TCAL40PD3 3-lug power distribution kit, SG

OEM part number	TCAL40PD3	A	S198, S200 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S198 s1 p. 6-104; oem_spec
Breaker compatibility	SG; max 400 A	A	S198, S200 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	400 A max	A	same as above
Kit contents	3-lug power distribution kit; wire range (12) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00339	TCLK265	GE	lug-kit	CURRENT

GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)

OEM part number	TCLK265	A	S198, S200 s1 p. 6-103; s3 p. 3-121; s1 p. 6-48; oem_spec
Alternate / superseded numbers	TCLK2652 / TCLK2651 (as printed) (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCLK2652'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	S198, S200 alias; s1 p. 6-103; s3 p. 3-121; oem_spec
Description	2-pole lug kit with lug cover for line or load end. Footnote: 'Order one kit for either line or load end; two kits required for both' (s1 p. 6-48). The 6-103 entry also says 'With lug cover for line or load end'.	A	S198, S200 s1 p. 6-103; s3 p. 3-121; s1 p. 6-48; oem_spec
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600/SG400, 2-pole (SGD/SGH/SGL/SGP)	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	lugs for one end of a 2-pole breaker, plus lug cover; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00340	TCLK365	GE	lug-kit	CURRENT

GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)

OEM part number	TCLK365	A	S198, S200 s1 p. 6-103; s3 p. 3-121; s1 p. 6-48; oem_spec
Alternate / superseded numbers	TCLK3652 / TCLK3653 / TCLK3654 (as printed) [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCLK3652/TCLK3653/TCLK3654'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-pole lug kit with lug cover for line or load end. Footnote: 'Order one kit for either line or load end; two kits required for both' (s1 p. 6-48). The 6-103 entry also says 'With lug cover for line or load end'.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600/SG400, 3-pole	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	lugs for one end of a 3-pole breaker, plus lug cover; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00356	TCOK265	GE	lug-kit	CURRENT

GE TCOK265 2-pole copper lug kit, SG600

OEM part number	TCOK265	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper 2-pole lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	2-pole kit; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00357	TCOK365	GE	lug-kit	CURRENT

GE TCOK365 3-pole copper lug kit, SG600

OEM part number	TCOK365	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper 3-pole lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	3-pole kit; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00367	**TCAL40PD1**	GE TCAL40PD1 power distribution lug, SG 400A	SG; max 400 A A	current

EDH-GEA-00367	TCAL40PD1	GE	lug	CURRENT

GE TCAL40PD1 power distribution lug, SG 400A

OEM part number	TCAL40PD1	A	S198, S200 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S198 s1 p. 6-104; oem_spec
Breaker compatibility	SG; max 400 A	A	S198, S200 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	400 A max	A	same as above
Kit contents	1 power distribution lug; wire range (12) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00351	**SG1BCK**	GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)	Spectra RMS SG600 A	current
EDH-GEA-00350	**SG1LCK**	GE SG1LCK 3-pole lug cover, SG600	Spectra RMS SG600 A	current
EDH-GEA-00392	**SGBCS1**	GE SGBCS1 back-connected line/load stud, SG600, 2 13/16 in (short)	SG600 (600 A) A	current
EDH-GEA-00393	**SGBCS2**	GE SGBCS2 back-connected line/load stud, SG600, 6 1/16 in (long)	SG600 (600 A) A	current
EDH-GEA-00362	**SGLVK**	GE SGLVK line voltage control wire kit, SG600	Spectra RMS SG600 A	current

EDH-GEA-00351	SG1BCK	GE	breaker-accessory	CURRENT

GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)

OEM part number	SG1BCK	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	SG1BCK4 (as printed 2019) [alias] (Footnote 4 'Required for line end bus connection' is appended in the 2019 extract. The 2012 edition prints SG1BCK.)	B	same as above
Description	3-pole lug cover for upper (line) or lower (load) end; required for line end bus connection	A	same as above
Application	accessory	A	same as above
Installation location	Line or load end; required at line end for bus connection	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00350	SG1LCK	GE	breaker-accessory	CURRENT

GE SG1LCK 3-pole lug cover, SG600

OEM part number	SG1LCK	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Replacement 3-pole lug cover for upper (line) or lower (load) end	A	same as above
Application	accessory	A	same as above
Installation location	Line or load end	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00392	SGBCS1	GE	breaker-accessory	CURRENT

GE SGBCS1 back-connected line/load stud, SG600, 2 13/16 in (short)

OEM part number	SGBCS1	A	S198 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SG600 (600 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 2 13/16 in (short)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-101; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00393	SGBCS2	GE	breaker-accessory	CURRENT

GE SGBCS2 back-connected line/load stud, SG600, 6 1/16 in (long)

OEM part number	SGBCS2	A	S198 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SG600 (600 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 6 1/16 in (long)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-101; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00362	SGLVK	GE	breaker-accessory	CURRENT

GE SGLVK line voltage control wire kit, SG600

OEM part number	SGLVK	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Line voltage control wire kit for terminating control wire at breaker lugs; single .25 quick connect	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SK1200

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00342	**TCALK2124**	GE TCALK2124 2-lug kit with wrench (TCAL124)	Spectra RMS SK1200 A	current
EDH-GEA-00345	**TCALK2125**	GE TCALK2125 2-lug kit with wrench (TCAL125)	Spectra RMS SK1200 A	current
EDH-GEA-00343	**TCALK3124**	GE TCALK3124 3-lug kit with wrench (TCAL124)	Spectra RMS SK1200 A	current
EDH-GEA-00346	**TCALK3125**	GE TCALK3125 3-lug kit with wrench (TCAL125)	Spectra RMS SK1200 A	current

EDH-GEA-00342	TCALK2124	GE	lug-kit	CURRENT

GE TCALK2124 2-lug kit with wrench (TCAL124)

OEM part number	TCALK2124	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	2-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	Cu 275-1200 A / Al 225-1100 A	A	same as above
Kit contents	2 lugs + wrench; wire range (3) 350-750 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00345	TCALK2125	GE	lug-kit	CURRENT

GE TCALK2125 2-lug kit with wrench (TCAL125)

OEM part number	TCALK2125	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	2-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	2 lugs + wrench; wire range (4) 250-500 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00343	TCALK3124	GE	lug-kit	CURRENT

GE TCALK3124 3-lug kit with wrench (TCAL124)

OEM part number	TCALK3124	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	Cu 275-1200 A / Al 225-1100 A	A	same as above
Kit contents	3 lugs + wrench; wire range (3) 350-750 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00346	TCALK3125	GE	lug-kit	CURRENT

GE TCALK3125 3-lug kit with wrench (TCAL125)

OEM part number	TCALK3125	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	3 lugs + wrench; wire range (4) 250-500 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00341	**TCAL124**	GE TCAL124 lug, Spectra SK1200, (3) 350-750 kcmil	Spectra RMS SK1200 A	current
EDH-GEA-00344	**TCAL125**	GE TCAL125 lug, Spectra SK1200, (4) 250-500 kcmil	Spectra RMS SK1200 A	current
EDH-GEA-00358	**TCO124**	GE TCO124 plated copper lug, SK1200 (3) 350-750	Spectra RMS SK1200 A	current
EDH-GEA-00359	**TCO125**	GE TCO125 plated copper lug, SK1200 (4) 250-500	Spectra RMS SK1200 A	current

EDH-GEA-00341	TCAL124	GE	lug	CURRENT

GE TCAL124 lug, Spectra SK1200, (3) 350-750 kcmil

OEM part number	TCAL124	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	Cu 275-1200 A / Al 225-1100 A	A	same as above
Kit contents	1 lug; wire range (3) 350-750 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00344	TCAL125	GE	lug	CURRENT

GE TCAL125 lug, Spectra SK1200, (4) 250-500 kcmil

OEM part number	TCAL125	A	S198, S200, S201 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	1 lug; wire range (4) 250-500 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00358	TCO124	GE	lug	CURRENT

GE TCO124 plated copper lug, SK1200 (3) 350-750

OEM part number	TCO124	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	1 lug; wire range (3) 350-750 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00359	TCO125	GE	lug	CURRENT

GE TCO125 plated copper lug, SK1200 (4) 250-500

OEM part number	TCO125	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	1 lug; wire range (4) 250-500 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00353	**SKPSHLD**	GE SKPSHLD lug cover/arc shield, SKPA upper end	Spectra SKPA (100 kA @ 480 Vac); may be used on other SK1200 devices A	current

EDH-GEA-00353	SKPSHLD	GE	barrier	CURRENT

GE SKPSHLD lug cover/arc shield, SKPA upper end

OEM part number	SKPSHLD	A	S198 s1 p. 6-103 fn 3; oem_spec
Description	Longer lug cover/arc shield for the upper end of the 100 kA 480 Vac SKPA; replacement part number; may be used on other SK1200 devices	A	same as above
Application	accessory	A	same as above
Installation location	Upper (line) end	A	same as above
Breaker compatibility	Spectra SKPA (100 kA @ 480 Vac); may be used on other SK1200 devices	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00352	**SK1LCK**	GE SK1LCK lug cover, SK1200	Spectra RMS SK1200 A	current

EDH-GEA-00352	SK1LCK	GE	breaker-accessory	CURRENT

GE SK1LCK lug cover, SK1200

OEM part number	SK1LCK	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	SK1LCK3 (as printed 2019) (Footnote 3 is appended)	B	S198 alias; s1 p. 6-103; oem_spec
Description	Lug cover for upper (line) or lower (load) end. SKPA (100 kA, 480 Vac) uses a longer lug cover/arc shield on the upper end (SKPSHLD).	A	S198, S200 s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra SE (SEDA/SEHA/SELA/SEPA)

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00758	**TE13PC1**	GE plug-in mounting base TE13PC1 (SE150 / E150 3-pole (vertical studs; example in text))	SE150 / E150 3-pole (vertical studs; example in text) A	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00728	**TE13PD1**	GE plug-in mounting base TE13PD1 (SE150 / E150 3-pole (also TB1 in 2012), SLS studs)	SE150 / E150 3-pole (also TB1 in 2012) A	Row present in Rev 9/12 plug-in table but absent from Rev 1/
EDH-GEA-00729	**TE13PD2**	GE plug-in mounting base TE13PD2 (SE150 / E150 3-pole (also TB1 in 2012), LSL studs)	SE150 / E150 3-pole (also TB1 in 2012) A	Row present in Rev 9/12 plug-in table but absent from Rev 1/

EDH-GEA-00758	TE13PC1	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TE13PC1 (SE150 / E150 3-pole (vertical studs; example in text))

OEM part number	TE13PC1	A	S198 Rev 1/19 p.6-105; oem_spec
Description	Plug-in mounting base assembly with vertical studs ("C" in place of "D"), SE150 / E150 3-pole (vertical studs; example in text). Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Breaker compatibility	SE150 / E150 3-pole (vertical studs; example in text)	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		
Open question	*TE13PC1 is cited only as an example in the explanatory text; confirm it is an orderable number.*		

EDH-GEA-00728	TE13PD1	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TE13PD1 (SE150 / E150 3-pole (also TB1 in 2012), SLS studs)

OEM part number	TE13PD1	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SLS (PD1 unit) for SE150 / E150 3-pole (also TB1 in 2012) breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP1 (TMP5 for TB1, 2012); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	SE150 / E150 3-pole (also TB1 in 2012)	A	S200 Rev 9/12 p.3-123; oem_spec
Current rating	150 A	A	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	B	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), E150 line (TEB, TED, THED, TEC), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00729	TE13PD2	GE	breaker-mounting-kit	ROW PRESENT IN REV 9/1

GE plug-in mounting base TE13PD2 (SE150 / E150 3-pole (also TB1 in 2012), LSL studs)

OEM part number	TE13PD2	A	S200 Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LSL (PD2 unit) for SE150 / E150 3-pole (also TB1 in 2012) breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP1 (TMP5 for TB1, 2012); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	SE150 / E150 3-pole (also TB1 in 2012)	A	S200 Rev 9/12 p.3-123; oem_spec
Current rating	150 A	A	S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Row present in Rev 9/12 plug-in table but absent from Rev 1/19 table (availability unknown)	B	S200, S198 3-123 vs 6-105; oem_spec
Cross-links	Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), E150 line (TEB, TED, THED, TEC), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00697	**SEMSK1**	GE breaker mounting screw kit SEMSK1 (SE150, tapped holes)	SE150 A	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00702	**SEMSK2**	GE breaker mounting screw kit SEMSK2 (SE150, clearance holes)	SE150 A	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00698	**SEMSK3**	GE breaker mounting screw kit SEMSK3 (SE150, tapped holes)	SE150 A	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00703	**SEMSK4**	GE breaker mounting screw kit SEMSK4 (SE150, clearance holes)	SE150 (also 2- and 3-pole E150 per Accessories table) A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00697	SEMSK1	GE	hardware-kit	LISTED IN ABB ECATALOG

GE breaker mounting screw kit SEMSK1 (SE150, tapped holes)

OEM part number	SEMSK1	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screw kit for mounting plates with tapped holes; screw size 10-32 x 2 7/8 in (standard)	A	same as above
	ABB eCatalog description: "SE150 MTG SCREW KIT 10-32 TAPPED" (UPC 783164212594)	A	S426 oem_spec
Installation location	Fastens the circuit breaker to its mounting plate / pan (rear mounting) (inferred from table heading)	B	S198 p.6-101; inference
Breaker compatibility	SE150	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Kit contents	4 screws and lockwashers	A	same as above
Fasteners	10-32 x 2 7/8 in (standard); for mounting plates with tapped holes	A	S198 p.6-101; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	A	S426 oem_spec
Cross-links	Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00702	SEMSK2	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE breaker mounting screw kit SEMSK2 (SE150, clearance holes)

OEM part number	SEMSK2	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screw kit for mounting plates with clearance holes; screw size 10-32 x 3 in (standard)	A	same as above
Installation location	Fastens the circuit breaker to its mounting plate / pan (rear mounting) (inferred from table heading)	B	S198 p.6-101; inference
Breaker compatibility	SE150	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Kit contents	4 screws, lockwashers and nuts	A	same as above
Fasteners	10-32 x 3 in (standard); for mounting plates with clearance holes	A	S198 p.6-101; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00698	SEMSK3	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE breaker mounting screw kit SEMSK3 (SE150, tapped holes)

OEM part number	SEMSK3	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screw kit for mounting plates with tapped holes; screw size 8-32 x 2 7/8 in (optional)	A	same as above
Installation location	Fastens the circuit breaker to its mounting plate / pan (rear mounting) (inferred from table heading)	B	S198 p.6-101; inference
Breaker compatibility	SE150	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Kit contents	4 screws and lockwashers	A	same as above
Fasteners	8-32 x 2 7/8 in (optional); for mounting plates with tapped holes	A	S198 p.6-101; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00703	SEMSK4	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE breaker mounting screw kit SEMSK4 (SE150, clearance holes)

OEM part number	SEMSK4	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screw kit for mounting plates with clearance holes; screw size 8-32 x 3 in (optional)	A	same as above
Installation location	Fastens the circuit breaker to its mounting plate / pan (rear mounting) (inferred from table heading)	B	S198 p.6-101; inference
Breaker compatibility	SE150 (also 2- and 3-pole E150 per Accessories table)	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Kit contents	4 screws, lockwashers and nuts	A	same as above
Fasteners	8-32 x 3 in (optional); for mounting plates with clearance holes	A	S198 p.6-101; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Breaker family Spectra SF (SFHA/SFLA/SFPA)

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00759	**TF23PC1**	GE plug-in mounting base TF23PC1 (SF250 3-pole, vertical studs (SLS))	SF250 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00759 **TF23PC1** GE breaker-mounting-kit **NOT LISTED IN ABB ECAT**

GE plug-in mounting base TF23PC1 (SF250 3-pole, vertical studs (SLS))

OEM part number	TF23PC1	**A**	S198 Rev 1/19 p.6-105; oem_spec
Description	Plug-in mounting base assembly with vertical studs ("C" in place of "D"), SF250 3-pole, vertical studs (SLS). Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	**A**	same as above
Breaker compatibility	SF250 3-pole	**A**	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Spectra SF (SFHA/SFLA/SFPA), F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00699	**SFGMSK1**	GE breaker mounting screw kit SFGMSK1 (SF250 and SG600, tapped holes)	SF250 and SG600 (also F225 per Accessories table) **A**	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00704	**SFGMSK2**	GE breaker mounting screw kit SFGMSK2 (SF250 and SG600, clearance holes)	SF250 and SG600 (also F225) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00700	**SFMSK1**	GE breaker mounting screw kit SFMSK1 (SF250, tapped holes)	SF250 **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00705	**SFMSK2**	GE breaker mounting screw kit SFMSK2 (SF250, clearance holes)	SF250 **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00699 **SFGMSK1** GE hardware-kit **LISTED IN ABB ECATALOG**

GE breaker mounting screw kit SFGMSK1 (SF250 and SG600, tapped holes)

OEM part number	SFGMSK1	**A**	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screw kit for mounting plates with tapped holes; screw size 12-24 x 3 3/4 in (standard for SF250)	**A**	same as above
	ABB eCatalog description: "SF250 MTG SCREW KIT 12-24 TAPPED" (UPC 783164027075)	**A**	S426 oem_spec
Installation location	Fastens the circuit breaker to its mounting plate / pan (rear mounting) (inferred from table heading)	**B**	S198 p.6-101; inference
Breaker compatibility	SF250 and SG600 (also F225 per Accessories table)	**A**	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Kit contents	4 screws and lockwashers	**A**	same as above
Fasteners	12-24 x 3 3/4 in (standard for SF250); for mounting plates with tapped holes	**A**	S198 p.6-101; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	**A**	S426 oem_spec
Cross-links	Breakers: Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00704	SFGMSK2	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE breaker mounting screw kit SFGMSK2 (SF250 and SG600, clearance holes)

OEM part number	SFGMSK2	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screw kit for mounting plates with clearance holes; screw size 12-24 x 4 in (standard for SF250)	A	same as above
Installation location	Fastens the circuit breaker to its mounting plate / pan (rear mounting) (inferred from table heading)	B	S198 p.6-101; inference
Breaker compatibility	SF250 and SG600 (also F225)	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Kit contents	4 screws, lockwashers and nuts	A	same as above
Fasteners	12-24 x 4 in (standard for SF250); for mounting plates with clearance holes	A	S198 p.6-101; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00700	SFMSK1	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE breaker mounting screw kit SFMSK1 (SF250, tapped holes)

OEM part number	SFMSK1	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screw kit for mounting plates with tapped holes; screw size 10-32 x 3 3/4 in (optional)	A	same as above
Installation location	Fastens the circuit breaker to its mounting plate / pan (rear mounting) (inferred from table heading)	B	S198 p.6-101; inference
Breaker compatibility	SF250	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Kit contents	4 screws and lockwashers	A	same as above
Fasteners	10-32 x 3 3/4 in (optional); for mounting plates with tapped holes	A	S198 p.6-101; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00705	SFMSK2	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE breaker mounting screw kit SFMSK2 (SF250, clearance holes)

OEM part number	SFMSK2	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screw kit for mounting plates with clearance holes; screw size 10-32 x 4 in (optional)	A	same as above
Installation location	Fastens the circuit breaker to its mounting plate / pan (rear mounting) (inferred from table heading)	B	S198 p.6-101; inference
Breaker compatibility	SF250	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Kit contents	4 screws, lockwashers and nuts	A	same as above
Fasteners	10-32 x 4 in (optional); for mounting plates with clearance holes	A	S198 p.6-101; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Breaker family Spectra SG (SGDA/SGHA/SGLA/SGPA)

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00768	**SGPC1**	GE plug-in mounting base SGPC1 (SG400 3-pole, vertical studs only (SLS))	SG400 3-pole, vertical studs only (SLS) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00769	**SGPC2**	GE plug-in mounting base SGPC2 (SG400 3-pole, vertical studs only (LSL))	SG400 3-pole, vertical studs only (LSL) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00770	**SGPC7**	GE plug-in mounting base SGPC7 (SG600 3-pole, vertical studs only (SLS/LSL))	SG600 3-pole, vertical studs only (SLS/LSL) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00768 **SGPC1** GE breaker-mounting-kit **NOT LISTED IN ABB ECAT**

GE plug-in mounting base SGPC1 (SG400 3-pole, vertical studs only (SLS))

OEM part number	SGPC1	**A**	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base for Spectra SG frame, SG400 3-pole, vertical studs only (SLS); vertical studs only for SG600 frame. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	**A**	same as above
Breaker compatibility	SG400 3-pole, vertical studs only (SLS)	**A**	same as above
OEM instruction document	GEH-5655 (Plug-in Mounting Base, SG600)	**A**	S198 SG600 publication list; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00769 **SGPC2** GE breaker-mounting-kit **NOT LISTED IN ABB ECAT**

GE plug-in mounting base SGPC2 (SG400 3-pole, vertical studs only (LSL))

OEM part number	SGPC2	**A**	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base for Spectra SG frame, SG400 3-pole, vertical studs only (LSL); vertical studs only for SG600 frame. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	**A**	same as above
Breaker compatibility	SG400 3-pole, vertical studs only (LSL)	**A**	same as above
OEM instruction document	GEH-5655 (Plug-in Mounting Base, SG600)	**A**	S198 SG600 publication list; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00770	SGPC7	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base SGPC7 (SG600 3-pole, vertical studs only (SLS/LSL))

OEM part number	SGPC7	**A**	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base for Spectra SG frame, SG600 3-pole, vertical studs only (SLS/LSL); vertical studs only for SG600 frame. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	**A**	same as above
Breaker compatibility	SG600 3-pole, vertical studs only (SLS/LSL)	**A**	same as above
OEM instruction document	GEH-5655 (Plug-in Mounting Base, SG600)	**A**	S198 SG600 publication list; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		
Open question	*SGPC7 listed as a single entry for SG600 3-pole (SLS2/LSL2) - is one number covering both ends?*		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00775	**SMP3**	GE optional plug-in mounting plate SMP3 (SG400/SG600 plug-in bases)	SG400/SG600 plug-in bases (SGPC1/2/7) **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00775	SMP3	GE	mounting-bracket	NOT LISTED IN ABB ECAT

GE optional plug-in mounting plate SMP3 (SG400/SG600 plug-in bases)

OEM part number	SMP3	**A**	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Optional mounting plate for plug-in mounting base assemblies: accurately locates and supports the pair of line and load plug-in bases, attaches the unit to a metal structure and serves as a dead-front barrier; drawings available for customers who fabricate their own plates. Used with SG400/SG600 plug-in bases (SGPC1/2/7)	**A**	same as above
Installation location	Behind the dead front; carries the line and load plug-in bases of one breaker	**A**	S198 6-105; oem_spec
Breaker compatibility	SG400/SG600 plug-in bases (SGPC1/2/7)	**A**	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00723	**SGMSKMOM**	GE mounting screw kit SGMSKMOM for motor-operated mechanism / plug-in base (SG600)	SG600 **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00723	SGMSKMOM	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE mounting screw kit SGMSKMOM for motor-operated mechanism / plug-in base (SG600)

OEM part number	SGMSKMOM	**A**	S198, S200 Rev 1/19 p.6-99; Rev 9/12 p.3-117; oem_spec
Description	Mounting screw kit for motor-operated mechanism; required with plug-in mounting base assembly when used with motor-operating mechanisms or TDR integral-handle kits; furnished no charge when ordered with mounting base	**A**	same as above
Breaker compatibility	SG600	**A**	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Breaker family Spectra SK (SKHA/SKLA/SKPA)

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00764	**TK103PC1A**	GE plug-in mounting base TK103PC1A (SK1200 1000 A, vertical studs (SLS))	SK1200 1000 A **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00765	**TK103PC2A**	GE plug-in mounting base TK103PC2A (SK1200 1000 A, vertical studs (LSL))	SK1200 1000 A **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00752	**TK103PD1A**	GE plug-in mounting base TK103PD1A (SK1200 / K1200 1000 A 3-pole, SLS studs)	SK1200 / K1200 1000 A 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00753	**TK103PD2A**	GE plug-in mounting base TK103PD2A (SK1200 / K1200 1000 A 3-pole, LSL studs)	SK1200 / K1200 1000 A 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00766	**TK123PC1A**	GE plug-in mounting base TK123PC1A (SK1200 1200 A, vertical studs (SLS))	SK1200 1200 A **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00767	**TK123PC2A**	GE plug-in mounting base TK123PC2A (SK1200 1200 A, vertical studs (LSL))	SK1200 1200 A **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00756	**TK123PD1A**	GE plug-in mounting base TK123PD1A (SK1200 / K1200 1200 A 3-pole, SLS studs)	SK1200 / K1200 1200 A 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00757	**TK123PD2A**	GE plug-in mounting base TK123PD2A (SK1200 / K1200 1200 A 3-pole, LSL studs)	SK1200 / K1200 1200 A 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00762	**TK83PC1A**	GE plug-in mounting base TK83PC1A (SK800 3-pole, vertical studs (SLS))	SK800 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00763	**TK83PC2A**	GE plug-in mounting base TK83PC2A (SK800 3-pole, vertical studs (LSL))	SK800 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00748	**TK83PD1A**	GE plug-in mounting base TK83PD1A (SK800 / K1200 800 A / TB8 3-pole, SLS studs)	SK800 / K1200 800 A / TB8 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00749	**TK83PD2A**	GE plug-in mounting base TK83PD2A (SK800 / K1200 800 A / TB8 3-pole, LSL studs)	SK800 / K1200 800 A / TB8 3-pole **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00764	TK103PC1A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TK103PC1A (SK1200 1000 A, vertical studs (SLS))

OEM part number	TK103PC1A	A	S198 Rev 1/19 p.6-105; oem_spec
Description	Plug-in mounting base assembly with vertical studs ("C" in place of "D"), SK1200 1000 A, vertical studs (SLS). Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Breaker compatibility	SK1200 1000 A	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00765	TK103PC2A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TK103PC2A (SK1200 1000 A, vertical studs (LSL))

OEM part number	TK103PC2A	A	S198 Rev 1/19 p.6-105; oem_spec
Description	Plug-in mounting base assembly with vertical studs ("C" in place of "D"), SK1200 1000 A, vertical studs (LSL). Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Breaker compatibility	SK1200 1000 A	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00752	TK103PD1A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TK103PD1A (SK1200 / K1200 1000 A 3-pole, SLS studs)

OEM part number	TK103PD1A	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SLS (PD1 unit) for SK1200 / K1200 1000 A 3-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP4; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	SK1200 / K1200 1000 A 3-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	1000 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA), K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00753	TK103PD2A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TK103PD2A (SK1200 / K1200 1000 A 3-pole, LSL studs)

OEM part number	TK103PD2A	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LSL (PD2 unit) for SK1200 / K1200 1000 A 3-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP4; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	SK1200 / K1200 1000 A 3-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	1000 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA), K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00766	TK123PC1A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TK123PC1A (SK1200 1200 A, vertical studs (SLS))

OEM part number	TK123PC1A	A	S198 Rev 1/19 p.6-105; oem_spec
Description	Plug-in mounting base assembly with vertical studs ("C" in place of "D"), SK1200 1200 A, vertical studs (SLS). Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Breaker compatibility	SK1200 1200 A	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00767	TK123PC2A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TK123PC2A (SK1200 1200 A, vertical studs (LSL))

OEM part number	TK123PC2A	A	S198 Rev 1/19 p.6-105; oem_spec
Description	Plug-in mounting base assembly with vertical studs ("C" in place of "D"), SK1200 1200 A, vertical studs (LSL). Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Breaker compatibility	SK1200 1200 A	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00756	TK123PD1A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TK123PD1A (SK1200 / K1200 1200 A 3-pole, SLS studs)

OEM part number	TK123PD1A	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SLS (PD1 unit) for SK1200 / K1200 1200 A 3-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP4; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	SK1200 / K1200 1200 A 3-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	1200 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA), K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00757	TK123PD2A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TK123PD2A (SK1200 / K1200 1200 A 3-pole, LSL studs)

OEM part number	TK123PD2A	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LSL (PD2 unit) for SK1200 / K1200 1200 A 3-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP4; mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	SK1200 / K1200 1200 A 3-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	1200 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA), K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00762	TK83PC1A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TK83PC1A (SK800 3-pole, vertical studs (SLS))

OEM part number	TK83PC1A	A	S198 Rev 1/19 p.6-105; oem_spec
Description	Plug-in mounting base assembly with vertical studs ("C" in place of "D"), SK800 3-pole, vertical studs (SLS). Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Breaker compatibility	SK800 3-pole	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00763	TK83PC2A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TK83PC2A (SK800 3-pole, vertical studs (LSL))

OEM part number	TK83PC2A	A	S198 Rev 1/19 p.6-105; oem_spec
Description	Plug-in mounting base assembly with vertical studs ("C" in place of "D"), SK800 3-pole, vertical studs (LSL). Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Breaker compatibility	SK800 3-pole	A	same as above
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00748	TK83PD1A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TK83PD1A (SK800 / K1200 800 A / TB8 3-pole, SLS studs)

OEM part number	TK83PD1A	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration SLS (PD1 unit) for SK800 / K1200 800 A / TB8 3-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP4 (TMP7 for TB8); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	SK800 / K1200 800 A / TB8 3-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	800 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA), K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

EDH-GEA-00749	TK83PD2A	GE	breaker-mounting-kit	NOT LISTED IN ABB ECAT

GE plug-in mounting base TK83PD2A (SK800 / K1200 800 A / TB8 3-pole, LSL studs)

OEM part number	TK83PD2A	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Description	Plug-in mounting base assembly, horizontal studs, stud configuration LSL (PD2 unit) for SK800 / K1200 800 A / TB8 3-pole breakers. Each plug-in mounting base assembly includes all mounting hardware, studs and male or female connectors for attachment to one end of breaker; 2 required per breaker. PD1 and PD2 units have different stud lengths to give electrical spacing between adjacent breakers (SLS unit adjacent to LSL unit). 'D' = horizontal studs; substitute 'C' for vertical studs.	A	same as above
Application	Optional mounting plate TMP4 (TMP7 for TB8); mounting screw kit for MOM/TDR handle (343L564 series) needed when used with motor operator or TDR handle	A	S198, S200 6-105; 6-99; oem_spec
Breaker compatibility	SK800 / K1200 800 A / TB8 3-pole	A	S198, S200 Rev 1/19 p.6-105; Rev 9/12 p.3-123; oem_spec
Current rating	800 A	A	S198, S200 6-105/3-123; oem_spec
OEM instruction document	GEH-4610 (Plug-in Mounting Base, E150/F225/J-line per Section 6 reference lists); GEH-4342 for K-line/SK; GEH-5655 for SG (mapping of frame to GEH number from frame reference lists)	B	S198 Section 6 publication lists (E150/F225/SE/SF: GEH-4610; K1200/SK: GEH-4342; SG: GEH-5655); oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA), K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, Material, stud dimensions, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00701	**SKMSK1**	GE breaker mounting screw kit SKMSK1 (SK1200, tapped holes)	SK1200 (also K1200 per Accessories table) A	Not listed in ABB eCatalog (empower) when checked 2026-10-21
EDH-GEA-00706	**SKMSK2**	GE breaker mounting screw kit SKMSK2 (SK1200, clearance holes)	SK1200 (also K1200) A	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00701	SKMSK1	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE breaker mounting screw kit SKMSK1 (SK1200, tapped holes)

OEM part number	SKMSK1	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screw kit for mounting plates with tapped holes; screw size 5/16-18 x 1 1/4 in	A	same as above
Installation location	Fastens the circuit breaker to its mounting plate / pan (rear mounting) (inferred from table heading)	B	S198 p.6-101; inference
Breaker compatibility	SK1200 (also K1200 per Accessories table)	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Kit contents	4 screws and lockwashers	A	same as above
Fasteners	5/16-18 x 1 1/4 in; for mounting plates with tapped holes	A	S198 p.6-101; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA), K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00706	SKMSK2	GE	hardware-kit	NOT LISTED IN ABB ECAT

GE breaker mounting screw kit SKMSK2 (SK1200, clearance holes)

OEM part number	SKMSK2	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screw kit for mounting plates with clearance holes; screw size 5/16-18 x 1 3/4 in	A	same as above
Installation location	Fastens the circuit breaker to its mounting plate / pan (rear mounting) (inferred from table heading)	B	S198 p.6-101; inference
Breaker compatibility	SK1200 (also K1200)	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Kit contents	4 screws, lockwashers and nuts	A	same as above
Fasteners	5/16-18 x 1 3/4 in; for mounting plates with clearance holes	A	S198 p.6-101; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	D	S426 oem_spec
Cross-links	Breakers: Spectra SK (SKHA/SKLA/SKPA), K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Breaker family TEY / TEYF / TEYD / TEYH / TEYL

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00716	**TEY3B**	GE TEY3B bolt-on mounting base (TEY / THQB, up to 3 poles)	TEY; THQB/TEY (THQB/THQC accessory table) A	Listed in ABB eCatalog (2026-10-21), stock status A
EDH-GEA-00717	**TEY3B125**	GE TEY3B125 mounting base for TEYD/TEYH/TEYL 3-pole 110/125 A	TEYD, TEYH, TEYL 3-pole 110-125 A A	Listed in ABB eCatalog (2026-10-21)

EDH-GEA-00716	TEY3B	GE	breaker-mounting-kit	LISTED IN ABB ECATALOG

GE TEY3B bolt-on mounting base (TEY / THQB, up to 3 poles)

OEM part number	TEY3B	A	S198, S200 Rev 1/19 p.6-101; 6-29; Rev 9/12 p.3-119; 3-28; oem_spec
Alternate / superseded numbers	TEY3B1 (as printed with footnote 1 ("Accepts up to 3 poles") fused to the number in PDF text extraction; base number TEY3B per p.6-29/3-28 and ABB eCatalog)	A	S198, S200 alias; 6-101; 3-119; oem_spec
Description	Bolt-on mounting base for TEY (and THQB) breakers; accepts up to 3 poles in any combination	A	S198, S200 Rev 1/19 p.6-101; 6-29; Rev 9/12 p.3-119; 3-28; oem_spec
	ABB eCatalog description: "MOUNTING BASE ASM" (UPC 783164198751)	A	S426 oem_spec
Breaker compatibility	TEY; THQB/TEY (THQB/THQC accessory table)	A	S198, S200 Rev 1/19 p.6-101; 6-29; Rev 9/12 p.3-119; 3-28; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	A	S426 oem_spec
Cross-links	Breakers: TEY / TEYF / TEYD / TEYH / TEYL, THQB / THHQB / TXQB		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

EDH-GEA-00717	TEY3B125	GE	breaker-mounting-kit	LISTED IN ABB ECATALOG

GE TEY3B125 mounting base for TEYD/TEYH/TEYL 3-pole 110/125 A

OEM part number	TEY3B125	**A**	S200 Rev 9/12 p.3-32; oem_spec
Description	TEYD/H/L 3-pole 110/125 A mounting base (lug-lug / unit mounting); outline drawing 10110291SH1	**A**	same as above
	ABB eCatalog description: "TEYD/H/L 3-P 110/125A MOUNTING BASE" (UPC 783164430622)	**A**	S426 oem_spec
Breaker compatibility	TEYD, TEYH, TEYL 3-pole 110-125 A	**A**	S200 Rev 9/12 p.3-32; oem_spec
OEM instruction document	Outline drawing 10110291SH1 (TEY3B125 Mounting Base Outline Drawing)	**A**	S200 p.3-32; oem_spec
Status	Listed in ABB eCatalog (2026-10-21)	**A**	S426 oem_spec
Cross-links	Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Breaker family THQB / THHQB / TXQB

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00719	**TQBSI**	GE TQBSI mounting screws for THQB (24 screws)	THQB **A**	Not listed in ABB eCatalog (empower) when checked 2026-10-21

EDH-GEA-00719	TQBSI	GE	fastener	NOT LISTED IN ABB ECAT

GE TQBSI mounting screws for THQB (24 screws)

OEM part number	TQBSI	**A**	S200 Rev 9/12 p.3-119; oem_spec
Alternate / superseded numbers	TQBSI7 (as printed with footnote 7 ("Contains 24 mounting screws") fused)	**A**	S200 alias; 3-119; oem_spec
Description	Mounting screws for THQB breakers; contains 24 mounting screws	**A**	S200 Rev 9/12 p.3-119; oem_spec
Breaker compatibility	THQB	**A**	same as above
Kit contents	24 mounting screws	**A**	S200 3-119 fn.7; oem_spec
Status	Not listed in ABB eCatalog (empower) when checked 2026-10-21 (absence from eCatalog is only a weak indicator of discontinuation)	**D**	S426 oem_spec
Cross-links	Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, Finish / plating, Identification features, Material, Torque values		

Breaker family TQD / THQD

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00709	**343L184G18**	GE breaker mounting screws 343L184G18 (2- and 3-pole TQD/THQD, tapped-hole plates)	2- and 3-pole TQD/THQD **A**	Listed in ABB eCatalog (2026-10-21), stock status A

EDH-GEA-00709	343L184G18	GE	fastener	LISTED IN ABB ECATALOG

GE breaker mounting screws 343L184G18 (2- and 3-pole TQD/THQD, tapped-hole plates)

OEM part number	343L184G18	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screws for mounting plates with tapped holes, 2- and 3-pole TQD/THQD breakers (BuyLog "Breaker Mounting Screw Kits and Accessories")	A	same as above
	ABB eCatalog description: "TQD MOUNTING SCREW KIT" (UPC 783164160918)	A	S426 oem_spec
Breaker compatibility	2- and 3-pole TQD/THQD	A	S198, S200 Rev 1/19 p.6-101; Rev 9/12 p.3-119; oem_spec
Status	Listed in ABB eCatalog (2026-10-21), stock status A	A	S426 oem_spec
Cross-links	Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, quantity, screw size		
Open question	*Screw thread/length not given in table - obtain from GE drawing 343L162 / 343L184*		

Breaker family TQD / THQD (Q-Line 225A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00282	**TCALK325**	GE TCALK325 3-lug kit, TQD, (1) #4-300 kcmil Cu-Al	TQD A	current

EDH-GEA-00282	TCALK325	GE	lug-kit	CURRENT

GE TCALK325 3-lug kit, TQD, (1) #4-300 kcmil Cu-Al

OEM part number	TCALK325	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit of Cu-Al lugs (TCAL25 range)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TQD	A	same as above
Kit contents	3 lugs; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: TQD / THQD (Q-Line 225A)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Does TCALK325 contain three TCAL25 lugs? The kit/single relationship is inferred from shared table rows, not stated.*		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00281	**TCAL25**	GE TCAL25 lug, TQD, (1) #4-300 kcmil Cu-Al	TQD A	current

EDH-GEA-00281	TCAL25	GE	lug	CURRENT

GE TCAL25 lug, TQD, (1) #4-300 kcmil Cu-Al

OEM part number	TCAL25	A	S198, S200 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TQD	A	same as above
Kit contents	1 lug; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S198 p. 6-102; oem_spec
Cross-links	Breakers: TQD / THQD (Q-Line 225A)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

5.17 General / family not yet assigned

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00712	**343L162G22**	GE breaker mounting screws 343L162G22 (THLC1, clearance-hole plates)	THLC1 **A**	Present in Rev 9/12 table; row absent from Rev 1/19 table
EDH-GEA-00713	**343L162G23**	GE breaker mounting screws 343L162G23 (THLC1, tapped-hole plates)	THLC1 **A**	Present in Rev 9/12 table; row absent from Rev 1/19 table
EDH-GEA-00714	**343L162G24**	GE breaker mounting screws 343L162G24 (THLC2, THLC4, TLB4, clearance-hole plates)	THLC2, THLC4, TLB4 **A**	Present in Rev 9/12 table; row absent from Rev 1/19 table
EDH-GEA-00715	**343L162G25**	GE breaker mounting screws 343L162G25 (THLC2, THLC4, TLB4, tapped-hole plates)	THLC2, THLC4, TLB4 **A**	Present in Rev 9/12 table; row absent from Rev 1/19 table

EDH-GEA-00712 **343L162G22** GE fastener **PRESENT IN REV 9/12 TA**

GE breaker mounting screws 343L162G22 (THLC1, clearance-hole plates)

OEM part number	343L162G22	**A**	S200 Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screws for mounting plates with clearance holes, THLC1 breakers (BuyLog "Breaker Mounting Screw Kits and Accessories")	**A**	same as above
Breaker compatibility	THLC1	**A**	same as above
Status	Present in Rev 9/12 table; row absent from Rev 1/19 table (dropped from catalog; actual availability unknown)	**B**	S200, S198 3-119 vs 6-101; oem_spec
Not yet documented	Dimensions, Finish / plating, Material, quantity, screw size		
Open question	*Screw thread/length not given in table - obtain from GE drawing 343L162 / 343L184*		
Open question	*THLC breakers are listed in 2008 as no longer available; is this hardware still sold?*		

EDH-GEA-00713 **343L162G23** GE fastener **PRESENT IN REV 9/12 TA**

GE breaker mounting screws 343L162G23 (THLC1, tapped-hole plates)

OEM part number	343L162G23	**A**	S200 Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screws for mounting plates with tapped holes, THLC1 breakers (BuyLog "Breaker Mounting Screw Kits and Accessories")	**A**	same as above
Breaker compatibility	THLC1	**A**	same as above
Status	Present in Rev 9/12 table; row absent from Rev 1/19 table (dropped from catalog; actual availability unknown)	**B**	S200, S198 3-119 vs 6-101; oem_spec
Not yet documented	Dimensions, Finish / plating, Material, quantity, screw size		
Open question	*Screw thread/length not given in table - obtain from GE drawing 343L162 / 343L184*		
Open question	*THLC breakers are listed in 2008 as no longer available; is this hardware still sold?*		

EDH-GEA-00714 **343L162G24** GE fastener **PRESENT IN REV 9/12 TA**

GE breaker mounting screws 343L162G24 (THLC2, THLC4, TLB4, clearance-hole plates)

OEM part number	343L162G24	**A**	S200 Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screws for mounting plates with clearance holes, THLC2, THLC4, TLB4 breakers (BuyLog "Breaker Mounting Screw Kits and Accessories")	**A**	same as above
Breaker compatibility	THLC2, THLC4, TLB4	**A**	same as above
Status	Present in Rev 9/12 table; row absent from Rev 1/19 table (dropped from catalog; actual availability unknown)	**B**	S200, S198 3-119 vs 6-101; oem_spec
Not yet documented	Dimensions, Finish / plating, Material, quantity, screw size		
Open question	*Screw thread/length not given in table - obtain from GE drawing 343L162 / 343L184*		
Open question	*THLC breakers are listed in 2008 as no longer available; is this hardware still sold?*		

EDH-GEA-00715	343L162G25	GE	fastener	PRESENT IN REV 9/12 TA

GE breaker mounting screws 343L162G25 (THLC2, THLC4, TLB4, tapped-hole plates)

OEM part number	343L162G25	A	S200 Rev 9/12 p.3-119; oem_spec
Description	Breaker mounting screws for mounting plates with tapped holes, THLC2, THLC4, TLB4 breakers (BuyLog "Breaker Mounting Screw Kits and Accessories")	A	same as above
Breaker compatibility	THLC2, THLC4, TLB4	A	same as above
Status	Present in Rev 9/12 table; row absent from Rev 1/19 table (dropped from catalog; actual availability unknown)	B	S200, S198 3-119 vs 6-101; oem_spec
Not yet documented	Dimensions, Finish / plating, Material, quantity, screw size		
Open question	*Screw thread/length not given in table - obtain from GE drawing 343L162 / 343L184*		
Open question	*THLC breakers are listed in 2008 as no longer available; is this hardware still sold?*		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00567	**AMCB6QD**	GE/ABB AMCB6QD	—	unknown

EDH-GEA-00567	AMCB6QD	GE / ABB lineage	other	STATUS UNKNOWN

GE/ABB AMCB6QD

Description	empower: "BOLT-ON STRAP KIT THQD" (UPC 783175333905)	A	S426 empower page AMCB6QD; oem_spec

6 Siemens lineage

Lineage / brand markings: Siemens, ITE, ITE Imperial, Gould, Murray

Family	Type	Status	Era	Entries	Pg
MURRAY Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	loadcenter	Murray-branded breakers (MP/MP-T/MP-HT types) treated as interchangeable with Siemens Q-line per forum; panel label governs	Murray line owned by Crouse-Hinds (Cooper) by late 1970s; Siemens bought line c.1992 and restored Murray name; Murray brand reportedly phased out c.2019	0	1469
CDP-ITE ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	panelboard	Obsolete; hardware traded by surplus dealers	—	8	1469
NLAB ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	panelboard	unknown	Listed in 1985 Canadian distributor price book under 'ITE - Siemens Distribution Equipment'	1	1471
P1 Type P1 (original)	panelboard	discontinued (kits still offered)	Pre-2014/2015 (replaced by Revised P1); listed in SPEEDFAX 2007-2008	108	1472
P2 Type P2 panelboard	panelboard	current	—	136	1482
P3 Type P3 panelboard	panelboard	current	—	141	1507
P4 Type P4 / S4 / Sentron SPP (10in deep) power panelboard	panelboard	current	—	86	1516
P5 Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	panelboard	current	—	117	1561
PUSHMATIC Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	panelboard	Obsolete; replacement breakers from Connecticut Electric (UBIP series, 1-2 pole 120/240 V, 10 kAIC ETL) and new-old-stock ITE/Siemens Pushmatic; 3-pole 208Y/120 replacements reported back-ordered/unavailable	Bulldog Electric Products Co. (Detroit; patents from 1934-36, panelboard patent US 2,428,320 of 1947); installed mainly 1950-1970; ITE (Gould) purchase stated 1976 (forum says 1950s - conflicting); Siemens c.1982-84	0	1603
RP1 Type P1 (Revised P1)	panelboard	current	Introduced 2015 per SpeedFax p.11-7 note ('Revised P1 was introduced in 2015'); p.11-11 table header says 'Revised P1 introduced 2014'	209	1610
S1/S2 Type S1 / S2 lighting panelboards	panelboard	discontinued; some kits available	—	94	1705
SE Type SE panelboard	panelboard	discontinued	—	11	1708
CDP6 Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	switchboard	discontinued equipment; strap kits still catalogued (Canada)	Strap kits fit switchboards manufactured since 1974	77	1708
SB Type SB1 / SB2 / SB3 distribution switchboards	switchboard	current	—	105	1720
SBP Super Blue Pennant / Blue Pennant stock service entrance switchboards	switchboard	unknown	—	40	1738

6.1 MURRAY — Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)

FAM-SIE-012 · loadcenter · aka Murray MP, MP-HT, Crouse-Hinds MP · markings: Murray, Crouse-Hinds, Siemens Murray

Murray (and Crouse-Hinds-branded) panels are primarily residential/light-commercial loadcenters; lineage passed to Siemens (code SIE). Commercial three-phase Murray panelboards were not found in this batch; surplus listings show only loadcenter mains (MEQ9985, MEQ9683R, MD200-H) and a motor-control ground bar LX074M.

Attribute	Value	Cl.	Sources
Status	Murray-branded breakers (MP/MP-T/MP-HT types) treated as interchangeable with Siemens Q-line per forum; panel label governs	D	S239 forum
Era of manufacture	Murray line owned by Crouse-Hinds (Cooper) by late 1970s; Siemens bought line c.1992 and restored Murray name; Murray brand reportedly phased out c.2019	D	same as above
Branch breakers accepted	Murray MP / MP-T / MP-HT plug-in; MD-series 2P mains (MD200-H, MD2150V); MEQ9985 / MEQ9683R 150 A 4P 120/240 MP-HT with mounting hardware	C	S229, S239 distributor

Key documents: S229 Superbreakers Murray + Wadsworth collections (products.json); S239 Murray / Crouse-Hinds / Siemens lineage (forum threads)

6.2 CDP-ITE — ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)

FAM-SIE-014 · panelboard · aka ITE CDP, CDP pre-Series 5, CDP 5.25, CDP7, CDP-7 · markings: ITE, Gould-ITE, Siemens

ITE-heritage CDP distribution panelboards that pre-date or sit beside the Series 5/6 CDP covered by family CDP6. Known only from dealer kit descriptions: 'ITE CDP Pre Series 5 hardware kit 2-3/4 in rise' (CD55JJ2), CDP 5.25 in deep FJ3/JL3 kits, 'CDP7 panel board 3 phase QJ MB/subfeed kit' and CDP7 BQ hardware. Construction and dates unconfirmed.

Attribute	Value	Cl.	Sources
Status	Obsolete; hardware traded by surplus dealers	C	S444 surplus_listing
Variants	Pre-Series 5 (2-3/4 in rise hardware), 5.25 in deep CDP, CDP7	C	same as above

Breaker families associated: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers

Key documents: S444 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00441	**CDP7MBKQJ3**	CDP-7 panelboard 3-phase QJ main/sub-feed breaker kit, 225 A	QJ C	Discontinued OEM item traded new-surplus / recertified by de

EDH-SIE-00441 **CDP7MBKQJ3** ITE / Siemens main-breaker-kit **DISCONTINUED OEM ITEM**

CDP-7 panelboard 3-phase QJ main/sub-feed breaker kit, 225 A

OEM part number	CDP7MBKQJ3	C	S444 surplus_listing
Description	CDP7 panel board 3 phase QJ MB/subfeed kit	C	same as above
Application	main or sub-feed	C	same as above
Installation location	CDP-7	C	same as above
Breaker compatibility	QJ	C	same as above
Current rating	225 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00434	**CD55JJ2**	ITE CDP pre-Series 5 J-frame hardware kit, 2-3/4 in rise	JJ (inferred from catalog number) C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00435	**CD62JJ2**	ITE CDP mounting hardware for JJ3/JL3/HJL3	JJ3, JL3, HJL3 C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00436	**CDP525-FD63BT**	ITE CDP 5.25 in deep panelboard twin hardware kit, FD63B	FD63B C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00437	**CDP525-FJ3B**	ITE CDP 5.25 in deep panelboard hardware kit, FJ3B200	FJ3B200 C	Discontinued OEM item traded new-surplus / recertified by de

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00438	**CDP525-FJ3BT**	ITE CDP 5.25 in deep panelboard twin hardware kit, FJ3B200	FJ3B200 C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00439	**CDP71PHED4**	ITE CDP mounting hardware for HED breakers	HED C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00440	**CDP7BQ3**	Siemens/ITE CDP-7 3-pole BQ hardware	BQ 3-pole (inferred) C	Discontinued OEM item traded new-surplus / recertified by de

EDH-SIE-00434	CD55JJ2	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE CDP pre-Series 5 J-frame hardware kit, 2-3/4 in rise

OEM part number	CD55JJ2	C	S444 surplus_listing
Description	ITE CDP Pre Series 5 Hardware Kit 2 3/4in Rise	C	same as above
Installation location	ITE CDP pre-Series 5	C	same as above
Breaker compatibility	JJ (inferred from catalog number)	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00435	CD62JJ2	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE CDP mounting hardware for JJ3/JL3/HJL3

OEM part number	CD62JJ2	C	S444 surplus_listing
Description	ITE, Mounting Hardware, CDP, JJ3/JL3/HJL3	C	same as above
Installation location	ITE CDP (Series 6 by catalog number - inference)	C	same as above
Breaker compatibility	JJ3, JL3, HJL3	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE, CDP6 · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00436	CDP525-FD63BT	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE CDP 5.25 in deep panelboard twin hardware kit, FD63B

OEM part number	CDP525-FD63BT	C	S444 surplus_listing
Description	FD63B panelboard twin hardware kit	C	same as above
Application	branch (twin)	C	same as above
Installation location	CDP 5.25 in deep (dealer panel type 'FJ3B')	C	same as above
Breaker compatibility	FD63B	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00437	CDP525-FJ3B	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE CDP 5.25 in deep panelboard hardware kit, FJ3B200

OEM part number	CDP525-FJ3B	C	S444 surplus_listing
Description	FJ3B200 panelboard hardware kit	C	same as above
Application	branch (single)	C	same as above
Installation location	CDP 5.25 in deep	C	same as above
Breaker compatibility	FJ3B200	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00438	CDP525-FJ3BT	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE CDP 5.25 in deep panelboard twin hardware kit, FJ3B200

OEM part number	CDP525-FJ3BT	C	S444 surplus_listing
Description	FJ3B200 panelboard twin hardware kit	C	same as above
Application	branch (twin)	C	same as above
Installation location	CDP 5.25 in deep	C	same as above
Breaker compatibility	FJ3B200	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00439	CDP71PHED4	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE CDP mounting hardware for HED breakers

OEM part number	CDP71PHED4	C	S444 surplus_listing
Description	ITE; CDP; Mounting Hardware for HED Breakers	C	same as above
Installation location	ITE CDP (CDP-7 by catalog number - inference)	C	same as above
Breaker compatibility	HED	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00440	CDP7BQ3	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Siemens/ITE CDP-7 3-pole BQ hardware

OEM part number	CDP7BQ3	C	S444 surplus_listing
Description	Siemens; Hardware; 3P; Hardware for CDP Panel	C	same as above
Installation location	CDP-7 panelboard	C	same as above
Breaker compatibility	BQ 3-pole (inferred)	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE · Breakers: ITE BQ / BQH / HBQ bolt-on (Canada)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

6.3 NLAB — ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards

FAM-SIE-013 · panelboard · aka NLAB, NLABLX, NLAB-LXX, NHB, HR-7 · markings: ITE, Siemens, ITE-Siemens

Canadian ITE-Siemens lighting panelboards seen only in a 1985 Copel/Electrozad price book: NLAB and NHB (BQ bolt-on breakers, aluminum bus standard, copper +30%), NLABLX/LXX column type and HR-7 for plug-in breakers. Shows NLAB/NHB were generic NEMA-style designations reused by several makers. US applicability unknown.

Attribute	Value	Cl.	Sources
Era of manufacture	Listed in 1985 Canadian distributor price book under 'ITE - Siemens Distribution Equipment'	C	S439 distributor
Voltage rating	NLAB, NHB: 240 V class ('NLAB, NHB-240V basic panel selector'); 100-600 A mains, 100 A max branch	C	same as above
Branch breakers accepted	BQ bolt-on (and BQH / HBQ) breakers; HR-7 panels for plug-in breakers; some HB breakers single-branch mounted only in NLAB	C	same as above
Bus	Aluminum bus bars standard; copper bus +30% to price	C	same as above

Breaker families associated: ITE BQ / BQH / HBQ bolt-on (Canada)
Key documents: S439 bwb_P9-BJG-737 Electrozad (Electrozad Supply Co. catalogue / price book, Copel Inc. 1985) - ITE-Siemens,
Also fits this family (entry printed elsewhere): 5JJ2

6.4 P1 — Type P1 (original)

FAM-SIE-002 · panelboard · aka Original P1, P1 (pre-2014/2015) · markings: Siemens

Original Siemens P1 lighting panelboard (pre-revision), 20in wide x 5.75in deep, main lug or main/subfeed strap kits through 400A. Subfeed space standard. Catalog numbers like Revised P1 but without the T suffix, up to 42 circuits. Kits for original P1 (MBKBL1, MBKED3, MBKQR3, MLKA3 etc.) are strap-only (breakers not included) and also fit 250A-max S1/S2 panels.

Attribute	Value	Cl.	Sources
Status	discontinued (kits still offered)	A	S165 p.11-15; oem_spec
Era of manufacture	Pre-2014/2015 (replaced by Revised P1); listed in SPEEDFAX 2007-2008	A	S165, S168 s1 p.11-7, s4 p.10-17; oem_spec
Successor	Revised P1 (RP1)	A	S165 p.11-7; oem_spec
Branch breakers accepted	BL, BLH, HBL, BQD, NGB/HGB/LGB	A	S168 p.10-18; oem_spec

Breaker families associated: BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H

Key documents: S165 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S168 SPEEDFAX 2007-2008 pp.10-17..10-22 SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22

Also fits this family (entry printed elsewhere): DFFP1A, DFFP01B, DFFPED01, DFFPFD01, DFFPJD01, DFFPQJ01, DFFPQJ02, MBKQRFK, P1SCRWS, IMK1, EGK, ECGK, IGK, ICGK, SEBKP1P2P3V1, EWK1, EWK3, EWK1B, NBK01A, NBK02A, NBK03A, LPJSPDNUT01, ECPLD1, ECPLD1R, ECPLD2, ECPLD2R, ECPLD3, ECPLD3R, ECQLD3, ECQTH4, ECQTH3, ECBX231M, ECQML12, MB120, FP9508, FP9555, FP9556, SMB6R, TCH65K, BR2, BR3, BR4, ECQL1, BQDHT2, BQDHT3, HPLQR, BQDPLD, HPLG, ED2HPL, FD6PL1, JD6HPL, MN6PLD, HBLQR, BQDHBD, E2HBL, FD6HB1, JD6HBL, MN6BL, EX11, SBMIQR, CQDST120, CQDST240, CQDST277, CQDST480, CQDST600, CQDST12, CQDST24, CQDST48, CQDST125, CQDA1, CQDA2, CQDBA, CQDST120AAS, CQDA1BA, S01QR2, S07QR2, A01QR2, A02QR2, MCHK, LPTS01, LPKEY01A, LPKEY01B, LPLOCK03A, LP3RHP01

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00045	**MBKBC3**	Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A	3-pole BQD 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00043	**MBKBL1**	Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A	2-pole BL/BLH/HBL 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00044	**MBKBL3**	Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A	3-pole BL/BLH/HBL 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00048	**MBKED1**	Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A	2-pole ED4/HED4 50A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00049	**MBKED3**	Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A	3-pole ED4/HED4 50A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00052	**MBKFD1**	Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A	2-pole F(X)D6/HF(X)D6 70A-250A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00053	**MBKFD3**	Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A	3-pole F(X)D6/HF(X)D6 70A-250A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00054	**MBKJD1**	Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00055	**MBKJD3**	Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00046	**MBKNB1**	Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A	2-pole NGB/LGB/HGB 15A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00047	**MBKNB3**	Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A	3-pole NGB/LGB/HGB 15A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00752	**MBKQJ3**	Original P1 main/subfeed strap kit MBKQJ3 (3-pole QJ/HQJ) - per seller listing	—	unknown
EDH-SIE-00050	**MBKQR1**	Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A	2-pole QR(H)2/HQR2(H) 125A-225A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00051	**MBKQR3**	Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A	3-pole QR(H)2/HQR2(H) 125A-225A A	listed for Original P1 (2021); strap only, breaker kits not

EDH-SIE-00045	MBKBC3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A

OEM part number	MBKBC3	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole BQD 15A-100A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole BQD 15A-100A	A	same as above
Current rating	100A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BMBKBQ3 ('OEM P/N MBKBC3 (titled 'P1 BQD Hardware')'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Cross-links	Families: P1, S1/S2 · Breakers: BQD		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00043	MBKBL1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A

OEM part number	MBKBL1	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole BL/BLH/HBL 15A-100A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole BL/BLH/HBL 15A-100A	A	same as above
Current rating	100A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00044	MBKBL3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A

OEM part number	MBKBL3	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole BL/BLH/HBL 15A-100A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole BL/BLH/HBL 15A-100A	A	same as above
Current rating	100A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BMBKBL3 ('OEM P/N MBKBL3; P1 one 3-pole BL/HBL main or branch'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Cross-links	Families: P1, S1/S2 · Breakers: BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00048	MBKED1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A

OEM part number	MBKED1	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole ED4/HED4 50A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole ED4/HED4 50A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00049	MBKED3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A

OEM part number	MBKED3	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole ED4/HED4 50A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole ED4/HED4 50A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BMBKED3 ('OEM P/N MBKED3; P1 one 3-pole ED main or branch'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Cross-links	Families: P1, S1/S2 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00052	MBKFD1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A

OEM part number	MBKFD1	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole F(X)D6/HF(X)D6 70A-250A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole F(X)D6/HF(X)D6 70A-250A	A	same as above
Current rating	250A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00053	MBKFD3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A

OEM part number	MBKFD3	**A**	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole F(X)D6/HF(X)D6 70A-250A; breaker not included	**A**	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	**A**	same as above
Breaker compatibility	3-pole F(X)D6/HF(X)D6 70A-250A	**A**	same as above
Current rating	250A max	**A**	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	**A**	same as above
Cross-links	Families: P1, S1/S2 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00054	MBKJD1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A

OEM part number	MBKJD1	**A**	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A; breaker not included	**A**	same as above
Application	main only (not available for subfeed)	**A**	same as above
Breaker compatibility	2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	**A**	same as above
Current rating	400A max	**A**	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	**A**	same as above
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BMBKJD1 ('OEM P/N MBKJD1; P1 one 2-pole JD main only'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	**D**	S628 distributor
Cross-links	Families: P1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00055	MBKJD3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A

OEM part number	MBKJD3	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A; breaker not included	A	same as above
Application	main only (not available for subfeed)	A	same as above
Breaker compatibility	3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	A	same as above
Current rating	400A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00046	MBKNB1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A

OEM part number	MBKNB1	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole NGB/LGB/HGB 15A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole NGB/LGB/HGB 15A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00047	MBKNB3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A

OEM part number	MBKNB3	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole NGB/LGB/HGB 15A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole NGB/LGB/HGB 15A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00752	MBKQJ3	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Original P1 main/subfeed strap kit MBKQJ3 (3-pole QJ/HQJ) - per seller listing

OEM part number	MBKQJ3	C	S628 distributor
Description	OEM P/N MBKQJ3; P1 one 3-pole QJ/HQJ main or branch (seller listing)	C	same as above
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BMBKQJ3 ('OEM P/N MBKQJ3; P1 one 3-pole QJ/HQJ main or branch'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	same as above
Cross-links	Families: P1		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00050	MBKQR1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A

OEM part number	MBKQR1	A	S165, S313 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole QR(H)2/HQR2(H) 125A-225A; breaker not included	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
	Main or subfeed <=250 A; subfeed only above 250 A	A	S313 pp. 2-3; oem_spec
Breaker compatibility	2-pole QR(H)2/HQR2(H) 125A-225A	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H; S1 and P1 (240 V maximum) panelboards; NOT compatible with Revised P1 (catalog ending N or T)	A	S313 pp. 2-3; oem_spec
Current rating	225A max	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Kit contents	Breaker support; breaker connector assembly (MBKQR3 has 3 connectors); QR breaker filler; MAIN label; neutral lug assembly; 2 #10-32 slotted hex washer thread-forming (30 lb-in); 1/4-20 x 1/2 hex head SEMS (72 lb-in); 2 #10-24 x 7/16 thread-forming (50 lb-in); 1/4-28 x 2-3/8 slotted round head machine screws (30 lb-in)	A	S313 pp. 2-3; oem_spec
Fasteners	Connector assembly half-holes engage anti-turn tabs under main bus, 1/4-20 SEMS; breaker support to base rail two #10-32; breaker to support 1/4-28 RH machine screw(s)	A	same as above
Torque values	#10-32 30; 1/4-20 72; #10-24 50; 1/4-28 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1138-01 Rev. 00: S1 & P1 Panelboard Kit MBKQR1 & MBKQR3 for 225A MAX QR Main/Subfeed Breaker (NOT for Revised P1)	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Cross-links	Families: P1, S1/S2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00051	MBKQR3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A

OEM part number	MBKQR3	A	S165, S313 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole QR(H)2/HQR2(H) 125A-225A; breaker not included	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
	Main or subfeed <=250 A; subfeed only above 250 A	A	S313 pp. 2-3; oem_spec
Breaker compatibility	3-pole QR(H)2/HQR2(H) 125A-225A	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H; S1 and P1 (240 V maximum) panelboards; NOT compatible with Revised P1 (catalog ending N or T)	A	S313 pp. 2-3; oem_spec
Current rating	225A max	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Kit contents	Breaker support; breaker connector assembly (MBKQR3 has 3 connectors); QR breaker filler; MAIN label; neutral lug assembly; 2 #10-32 slotted hex washer thread-forming (30 lb-in); 1/4-20 x 1/2 hex head SEMS (72 lb-in); 2 #10-24 x 7/16 thread-forming (50 lb-in); 1/4-28 x 2-3/8 slotted round head machine screws (30 lb-in)	A	S313 pp. 2-3; oem_spec
Fasteners	Connector assembly half-holes engage anti-turn tabs under main bus, 1/4-20 SEMS; breaker support to base rail two #10-32; breaker to support 1/4-28 RH machine screw(s)	A	same as above
Torque values	#10-32 30; 1/4-20 72; #10-24 50; 1/4-28 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1138-01 Rev. 00: S1 & P1 Panelboard Kit MBKQR1 & MBKQR3 for 225A MAX QR Main/Subfeed Breaker (NOT for Revised P1)	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	S165 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Cross-links	Families: P1, S1/S2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00029	**4MLKA1**	Original P1 400A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00030	**4MLKA3**	Original P1 400A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00031	**4MLKC1**	Original P1 400A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00032	**4MLKC3**	Original P1 400A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00025	**MLKA1**	Original P1 250A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00026	**MLKA3**	Original P1 250A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00027	**MLKC1**	Original P1 250A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00028	**MLKC3**	Original P1 250A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)

EDH-SIE-00029	4MLKA1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 1-ph

OEM part number	4MLKA1	A	S165 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00030	4MLKA3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 3-ph

OEM part number	4MLKA3	A	S165 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00031	4MLKC1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 1-ph

OEM part number	4MLKC1	A	S165 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00032	4MLKC3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 3-ph

OEM part number	4MLKC3	A	S165 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00025	MLKA1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 1-ph

OEM part number	MLKA1	A	S165 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (MLO kits available for SE panels - AL 250A only (MLKA1/MLKA3); original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00026	MLKA3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 3-ph

OEM part number	MLKA3	A	S165 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (MLO kits available for SE panels - AL 250A only (MLKA1/MLKA3); original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00027	MLKC1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 1-ph

OEM part number	MLKC1	A	S165 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00028	MLKC3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 3-ph

OEM part number	MLKC3	A	S165 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00063	**QF3**	QF3 1-pole plastic filler plate (load center / legacy switchboard)	BL, BQD, ED (p.13-20); QP, BL, BQD, NGB, ED (p.13-17) A	still approved in panelboards/switchboards; only QF3 approve

EDH-SIE-00063	QF3	Siemens	filler-plate	STILL APPROVED IN PANE

QF3 1-pole plastic filler plate (load center / legacy switchboard)

OEM part number	QF3	A	S167, S589 oem_spec
Alternate / superseded numbers	DFFP1A	A	S165 superseded_by; p.11-20; oem_spec
	12-1800-01 ('sub no. 12-1800-01')	C	S177 alias; distributor
Description	Filler plate, per pole, for BQ, BQH, HBQ, E2, E4, E6, HE4, HE6, E2-A..HE6-A and ED2, ED4, ED6, HED4, HED6 frames in Series 5/6 CDP panelboards and FC-20, Class II, FCI, FCII, SB1, SB2, SB3 switchboards	A	S167 p.8-13 'Filler Plates'; oem_spec
Application	blank 1-pole branch positions	A	S167 p.8-13; oem_spec
	Per pole; close unused openings in front filler plate	A	S589 pp.13-17, 13-20; oem_spec
Breaker compatibility	BL, BQD, ED (p.13-20); QP, BL, BQD, NGB, ED (p.13-17)	A	same as above
Status	still approved in panelboards/switchboards; only QF3 approved for residential load centers, meter combos	A	S165 p.11-23 footnote b-c; oem_spec
Cross-links	Families: P1, P2, P3, SB, CDP6, SBP · Breakers: BL, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', ED (ED2/ED4/ED6/HED4/HHED6) and CED6, BQ / BQH / HBQ (bolt-on, legacy), BQD / CQD (incl. BQD6, CQD6), Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Spd Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00422	**TPS3 09**	TPS3 09 SPD module kit for Type P1 lighting panelboard (250 A max P1)	—	unknown

EDH-SIE-00422	TPS3 09	Siemens lineage	spd-kit	STATUS UNKNOWN

TPS3 09 SPD module kit for Type P1 lighting panelboard (250 A max P1)

OEM part number	TPS3 09	A	S395 single page; oem_spec
Application	Do not perform dielectric tests with TPS unit installed	A	same as above
Kit contents	1 TPS3 09 SPD; 8 #10-32 x 1/2 slotted hex thread-forming screws; 1 bracket TPS3 09 P1 (right); 1 bracket TPS3 09 P1 (left); 1 20 A 3-pole breaker; 1 SPD (TVSS) label; 1 plastic cover plate	A	same as above
Fasteners	Brackets to TPS3 09 with 4 #10-32 screws; TPS with brackets to P1 rails with 4 #10-32 screws; leads to 20 A 3-pole breaker and neutral; ground lead ring terminal to chassis ground	A	same as above
OEM instruction document	Siemens instruction sheet #8177 (12.09.09): Installation Instructions for TPS3 09 in Lighting Panelboards Type P1	A	same as above
Cross-links	Families: P1, RP1		

6.5 P2 — Type P2 panelboard

FAM-SIE-005 · panelboard · aka P2 · markings: Siemens

Siemens bolt-on lighting/distribution panelboard with unit-space construction; branch devices installed via field strap kits (BBK*) in 3in or 6in increments; deadfront uses center strips (DFK*) and blank plates (DFFP3/DFFP6).

Attribute	Value	Cl.	Sources
Status	current	A	S165 p.11-42; oem_spec
Branch breakers accepted	BL/BQD, xGB/3VA41, ED, GB2, QR, 3VA52/61/62 via strap kits	A	S165 p.11-53; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H

Key documents: S165 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S170 Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)

Also fits this family (entry printed elsewhere): DFFP1A, QF3, DFFPVA5363A, DFFPFD01, DFFPJD01, IMK1, EGK, ECGK, IGK, ICGK, SEBKP1P2P3V1, EWK1, EWK2, EWK3, EWK1B, EWK2B, LPDC01, LPLOCK01A, LPLOCK02A, B74FLR, LPJSPDNUT01, ECPLD1, ECPLD1R, ECPLD2, ECPLD2R, ECPLD3, ECPLD3R, ECQLD3, ECQTH4, ECQTH3, ECBX231M, ECQML12, MB120, FP9508, FP9555, FP9556, SMB6R, TCH65K, BR2, BR3, BR4, ECQL1, BQDHT2, BQDHT3, HPLQR, BQDPLD, HPLG, ED2HPL, FD6PL1, JD6HPL, MN6PLD, HBLQR, BQDHBD, E2HBL, FD6HB1, JD6HBL, MN6BL, EX11, SBMIQR, CQDST120, CQDST240, CQDST277, CQDST480, CQDST600, CQDST12, CQDST24, CQDST48, CQDST125, CQDA1, CQDA2, CQDBA, CQDST120AAS, CQDA1BA, S01QR2, S07QR2, A01QR2, A02QR2, MCHK, LPTS01, LPKEY01A, LPKEY01B, LPLOCK03A, LP3RHP01

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00117	**BNK350N**	Neutral lug kit	—	listed (2019-2021)

EDH-SIE-00117	BNK350N	Siemens	lug-kit	LISTED (2019-2021)

Neutral lug kit

OEM part number	BNK350N	A	S165, S349 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, narrow 350 kcmil lug with two mounting screws; used in P2/P3 neutrals	A	S165 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Installation location	Neutral lug pad, neutral cross bus or vertical neutral bus	A	S349 single sheet; oem_spec
Kit contents	1 350 MCM narrow lug 11-A-1869-01; 2 mounting screws	A	same as above
Wire range	Max 350 kcmil Cu or Al	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1177-01 Rev. 00: BNK350N 350 MCM narrow neutral lug replacement kit for P2 and P3	A	same as above
Status	listed (2019-2021)	A	S165 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Identification features	Drawing ref 11-A-1869-61	A	same as above
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00102	**BBKB32**	P2/P3 BL/BQD 100A max twin-mount branch strap kit	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole **A**	current
EDH-SIE-00104	**BBKED32**	P2/P3 ED twin-mount branch strap kit	P2/P3 ED twin-mount branch strap kit **A**	field replacement only; use 3VA41 with BBKVA4P2P3 where poss
EDH-SIE-00106	**BBKGB32**	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit **A**	field replacement only; use BBKVA4P2P3 where possible
EDH-SIE-00105	**BBKNB32**	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit **A**	field replacement only; use BBKVA4P2P3 where possible
EDH-SIE-00110	**BBKQ1**	P2 QJ single-mount branch strap kit	P2 QJ single-mount branch strap kit **A**	discontinued - QJ not available, use new kit BBKQR1
EDH-SIE-00108	**BBKQR1**	P2 QR 225A max single-mount branch strap kit	P2 QR 225A max single-mount branch strap kit **A**	current
EDH-SIE-00103	**BBKVA4P2P3**	P2/P3 3VA41/xGB 125A max twin-mount strap kit	P2/P3 3VA41/xGB 125A max twin-mount strap kit **A**	current
EDH-SIE-00112	**BBKVA5262P2S**	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit **A**	current

EDH-SIE-00102	BBKB32	Siemens	branch-connector-kit	CURRENT

P2/P3 BL/BQD 100A max twin-mount branch strap kit

OEM part number	BBKB32	A	S165, S365, S254 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec

Description	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole, uses 3in of unit space for 6 circuits	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	(P2/P3) BL/BQD 6-pole 3 in branch breaker kit: top barrier, (3) A/C connectors, (1) B connector, hardware	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space) (BL/BQD kits also accept GFCI/AFCI breakers, BT twin and BSPD surge devices (s6))	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S365 pp. 2-4 (image); oem_spec
Breaker compatibility	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Siemens BL and BQD breakers; 1-ph or 3-ph	A	S365 pp. 2-4 (image); oem_spec
Current rating	100A max	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S165 p.11-67; oem_spec
	1 BL/BQD breaker mounting barrier; 3 outer connector bus; 1 center connector bus; 6 1 in unit-space deadfront fillers; 2 P3 panel deadfront adaptor plates; 6 8-32 self-threading screws; 3 1/4-20 x 5/8 self-threading screws (P2 5-3/4 in deep); 3 1/4-20 x 1 self-threading screws (P3 7-3/4 in deep); 6 10-24 x 5/8 self-threading screws (breaker line stabs)	A	S365 pp. 2-4 (image); oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 3 in of branch unit space	A	S365 pp. 2-4 (image); oem_spec
Fasteners	Barrier to base rails two 8-32; connectors to panel bus three 1/4-20 x 5/8 (P2) or 1/4-20 x 1 (P3); P3 deadfront adaptor plates four 8-32	A	same as above
Torque values	Per back-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1078-01 Rev. 0: P2 & P3 Panelboard Kit BBKB32 For Branch Mounting of BL & BQD Breakers (scanned; read visually)	A	same as above
Status	current	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BP2BLBQDITE ('Kit # BBKB32; P2/P3 two BL or BQD'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Identification features	Drawing ref 11-D-2267-01	A	S165 p.11-53; oem_spec
Requires (stated)	DFFP3 (3 in gap), DFFP6 (6 in gap), DFK1 (P2 center strip), BKN2/BNK2 (P2 neutral sites)	A	S365 pp. 2-4 (image); oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00104	**BBKED32**	Siemens	branch-connector-kit	**FIELD REPLACEMENT ONLY**

P2/P3 ED twin-mount branch strap kit

OEM part number	BBKED32	A	S165, S366, S254 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 ED twin-mount branch strap kit, 6-pole, 3in of unit space for 6 circuits	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	(P2/P3) ED 6-pole 3 in branch breaker kit: breaker support, inter-phase barriers, (3) A/C connectors, (1) B connector, hardware	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S366 pp. 2-4 (image); oem_spec
Breaker compatibility	P2/P3 ED twin-mount branch strap kit	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Siemens ED breakers; 1-ph or 3-ph	A	S366 pp. 2-4 (image); oem_spec
Kit contents	breaker support, inter-phase barriers, (3) A/C connectors, (1) B connector, hardware	A	S165 p.11-67; oem_spec
	2 ED breaker supports; 3 outer connector bus; 1 center connector bus; 2 ED branch 1-phase system barriers; 2 ED branch 3-phase system barriers; 6 1 in unit-space deadfront fillers; 2 P3 panel deadfront adaptor plates; 8 8-32 x 9/32 self-threading screws; 3 1/4-20 x 5/8 self-threading (P2); 3 1/4-20 x 1 self-threading (P3); 2 8-32 x 5/8 self-threading; 6 10-24 x 5/8 self-threading (line stabs)	A	S366 pp. 2-4 (image); oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 3 in of branch unit space	A	S366 pp. 2-4 (image); oem_spec
Fasteners	Two breaker supports to base rails with four 8-32 screws; 3-ph: two ED branch 3-ph barriers inserted by pins into middle panel bus; connectors to panel bus 1/4-20 x 5/8 (P2) / x 1 (P3)	A	same as above
Torque values	Per back-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1079-01 Rev. 0: P2 & P3 Panelboard Kit BBKED32 For Branch Mounting of ED Breakers (scanned; read visually)	A	same as above
Status	field replacement only; use 3VA41 with BBKVA4P2P3 where possible	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BP2EDITE ('Kit # BBKED32; P2/P3 two ED2/ED4/ED6'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Cross-links	Families: P2, P3 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00106	BBKGB32	Siemens	branch-connector-kit	FIELD REPLACEMENT ONLY

P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit

OEM part number	BBKGB32	A	S165, S298, S254 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec

Description	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit, 6-pole, 3in for 6 circuits	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	(P2/P3) NGB2, HGB2, LGB2 6-pole 3 in branch breaker kit: top barrier, (3) A/C connectors, (1) B connector, hardware	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S298 pp. 1-4; oem_spec
Breaker compatibility	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	NGB2, HGB2, LGB2 ONLY (not NGB/LGB/HGB); 1-ph or 3-ph	A	S298 pp. 1-4; oem_spec
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S165 p.11-67; oem_spec
	1 GB2 breaker mounting barrier; 3 outer connector bus; 1 center connector bus; 6 1 in unit-space deadfront fillers; 2 P3 panel deadfront adaptor plates; 6 #8-32 self-threading screws; 3 1/4-20 x 5/8 self-threading screws; 3 1/4-20 x 1 self-threading screws; 6 #10-24 x 1/2 socket head cap screws; 1 1/4-20 x 2-1/4 self-threading screw; 1 1/4-20 x 1-7/8 self-threading screw	A	S298 pp. 1-4; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 3 in of branch unit space	A	S298 pp. 1-4; oem_spec
Fasteners	Barrier to base rails two #8-32; connectors to panel bus 1/4-20 x 5/8 (P2) or 1/4-20 x 1 (P3); breaker line stabs #10-24 x 1/2 SHCS; P3 deadfront adaptor plates #8-32	A	same as above
Torque values	Per back-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1030-01 Rev. 01: P2 & P3 Panelboard Kit BBKGB32 Installation Instructions for Branch Mounting Type GB2 Breakers	A	same as above
Status	field replacement only; use BBKVA4P2P3 where possible	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BP2GBITE ('OEM P/N BBKGB32; P2/P3 six poles NGB/HGB/LGB twin'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Requires (stated)	DFFP3 / DFFP6 deadfront filler kits for gaps; DFK1 for P2 center strip; BNK2 if P2 branch neutral lacks sites	A	S298 pp. 1-4; oem_spec
Cross-links	Families: P2, P3 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00105	**BBKNB32**	Siemens	branch-connector-kit	**FIELD REPLACEMENT ONLY**

P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit

OEM part number	BBKNB32	A	S165, S299, S254 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec

Description	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit, 6-pole, 3in for 6 circuits	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	(P2/P3) NGB, HGB, LGB 6-pole 3 in branch breaker kit: top barrier, (3) A/C connectors, (1) B connector, hardware	**A**	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	**A**	S299 pp. 1-4; oem_spec
Breaker compatibility	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Type GB (NGB, HGB, LGB); 1-ph or 3-ph	**A**	S299 pp. 1-4; oem_spec
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	**A**	S165 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 3 in of branch unit space	**A**	S299 pp. 1-4; oem_spec
Fasteners	Barrier two #8-32 to base rails; P2: outer connectors 1/4-20 x 5/8, center connector 1/4-20 x 1-7/8; P3: outer 1/4-20 x 1, center 1/4-20 x 2-1/4; 1-ph: three outer connectors alternating left-right-left; breaker stabs #10-24 x 5/8	**A**	same as above
Torque values	Per back-of-deadfront label	**A**	same as above
OEM instruction document	Siemens instruction sheet 12-A-1092-01 Rev. 02: P2 & P3 Panelboard Kit BBKNB32 Installation Instructions for Branch Mounting Type GB Breakers	**A**	same as above
Status	field replacement only; use BBKVA4P2P3 where possible	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BP2NGBITE ('Kit # BBKNB32; P2/P3 two 2P/3P NGB'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	**D**	S628 distributor
Cross-links	Families: P2, P3 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00110	BBKQ1	Siemens	branch-connector-kit	DISCONTINUED - QJ NOT

P2 QJ single-mount branch strap kit

OEM part number	BBKQ1	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2 QJ single-mount branch strap kit, 6in for one 2-p or 3-p breaker	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2 QJ single-mount branch strap kit	A	same as above
Dimensions	Unit space: 6in / 1 breaker	A	same as above
Status	discontinued - QJ not available, use new kit BBKQR1	A	same as above
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BP2QJITE ('Kit # BBKQ1; P2 one 2P/3P QJ'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Cross-links	Families: P2 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00108	BBKQR1	Siemens	branch-connector-kit	CURRENT

P2 QR 225A max single-mount branch strap kit

OEM part number	BBKQR1	A	S165, S301 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2 QR 225A max single-mount branch strap kit, 6in of unit space for one 2-pole or 3-pole breaker	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space)	A	same as above
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S301 pp. 1-4; oem_spec
Breaker compatibility	P2 QR 225A max single-mount branch strap kit	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H; 2-pole on 1-ph or 3-pole on 3-ph	A	S301 pp. 1-4; oem_spec
Current rating	225A max	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	1 QR breaker support; 1 long outer connector bus; 1 short outer connector bus type A; 1 short outer connector bus type B; 1 center connector bus; 1 branch neutral lug; 1 QR branch deadfront plate; 1 QR breaker deadfront escutcheon; 6 #8-32 x 9/32 thread-forming screws (30 lb-in); 9 1/4-20 x 5/8 thread-forming (72 lb-in); 1 1/4-20 x 3/4 thread-forming (72 lb-in); 2 1/4-20 x 2-1/2 machine screws (30 lb-in)	A	S301 pp. 1-4; oem_spec
Dimensions	Unit space: 6in / 1 breaker	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 6 in of branch unit space; breaker connection holes spaced 1.50 in; 2.50 in dims shown	A	S301 pp. 1-4; oem_spec
Torque values	#8-32 30 lb-in; 1/4-20 thread-forming 72 lb-in; breaker mounting 1/4-20 x 2-1/2 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1131-01 Rev. 00: P2 Panelboard Kit BBKQR1 Installation Instructions for Branch Mounting of 225A MAX QR Breakers	A	same as above

Status	current	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BP2QRITE ('OEM P/N BBKQR1; P2 one QR/HQR single branch'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	**D**	S628 distributor
Identification features	Drawing ref 11-D-2636-01	**A**	S165 p.11-53; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00103 **BBKVA4P2P3** Siemens branch-connector-kit **CURRENT**

P2/P3 3VA41/xGB 125A max twin-mount strap kit

OEM part number	BBKVA4P2P3	**A**	S165, S300 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 3VA41/xGB 125A max twin-mount strap kit, 3in of unit space for 6 circuits	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space) (3VA41/xGB kits also accept BSPD surge devices (s6))	**A**	same as above
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	**A**	S300 pp. 1-4; oem_spec
Breaker compatibility	P2/P3 3VA41/xGB 125A max twin-mount strap kit	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	3VA41 (SEAB, MEAB, HEAB) or xGB (NGB, HGB, LGB)	**A**	S300 pp. 1-4; oem_spec
Current rating	125A max	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	1 top barrier; 3 outer connector bus; 1 center connector bus; 6 1 in deadfront fillers; 2 P3 deadfront adaptor plates; 6 #8-32 self-threading screws; 1/4-20 screws 5/8 in and 1 in (outer) and 1-7/8 / 2-1/4 in (center) by bus lamination; #10-24 x 5/8 breaker stab screws	**A**	S300 pp. 1-4; oem_spec
Dimensions	Unit space: 3in / 6 circuits	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 3 in of branch unit space	**A**	S300 pp. 1-4; oem_spec
Fasteners	Single-lamination bus (P2 125-600 A; P3 250-400 A): 5/8 in outer, 1-7/8 in center; double-lamination bus (P3 600-800 A): 1 in outer, 2-1/4 in center	**A**	same as above
Torque values	Per back-of-deadfront label	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1055-01 Rev. 02: BBKVA4P2P3 Type 3VA41 or xGB Branch Breaker Mounting Kit Installation Instructions for P2 or P3 Panelboards	**A**	same as above
Status	current	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Identification features	Drawing ref 13-D-2011-13	**A**	S165 p.11-53; oem_spec
	Panels installed before 2021: remove old plastic 1 in fillers and replace the 4 deadfront supports; only 1 in fillers marked DFFP1A on back to be used	**A**	S300 pp. 1-4; oem_spec

Requires (stated)	DFK1 or DFK07 thru DFK21 center strips; DFFP3/DFFP6; BNK2	A	S300 pp. 1-4; oem_spec
Cross-links	Families: P2, P3 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00112	**BBKVA5262P2S**	Siemens	branch-connector-kit	CURRENT

P2/P3 250A max 3VA52/61/62 single-mount branch strap kit

OEM part number	BBKVA5262P2S	A	S165, S304 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Alternate / superseded numbers	BBKVA5262S (Spelling in P3 data sheet; likely same kit)	A	S170 alias; oem_spec
Description	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit, 1ph or 3ph, 6in for one 2-pole or 3-pole breaker	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space)	A	same as above
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S304 pp. 1-4; oem_spec
Breaker compatibility	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	3VA52, 3VA61, 3VA62; 1-ph 2/3-w or 3-ph 3/4-w	A	S304 pp. 1-4; oem_spec
Current rating	250A max	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	includes 1 BBKVA5262P2HW hardware kit	A	S165 p.11-67; oem_spec
	1 3VA52/61/62 top barrier; A-, B-, C-phase connector bus (1 each); 1 P2 deadfront plate; 1 P3 deadfront plate; 1 escutcheon plate; 1 350 kcmil neutral lug; 1 3VA52/62 hardware kit; 4 #8-32 x 9/32 HWH (30 lb-in); 1 1/4-20 x 1/2 SHWHSW (72); 3 1/4-20 x 5/8 SHWHSW (72); 2 1/4-20 x 3/4 SHWHSW (72); 4 1/4-20 x 1 machine screws (72); 3 5/16-18 x 3/4 machine screws (144 lb-in)	A	S304 pp. 1-4; oem_spec
Dimensions	Unit space: 6in / 1 breaker	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 6 in of branch unit space; connector breaker holes spaced 1.38 in	A	S304 pp. 1-4; oem_spec
Fasteners	Connector bus to phase bus 1/4-20 x 5/8 (single-lamination) or 1 in (double-lamination); breaker bus extensions to connectors 5/16-18 x 3/4; breaker to barrier #8-32 x 3	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1051-01 Rev. 01: P2 / P3 Panelboard Kit BBKVA5262P2S Installation Instructions for Branch Mounting 3VA52 / 3VA61 / 3VA62 Circuit Breakers	A	same as above
Status	current	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Identification features	Drawing ref 11-D-2894-01	A	S165 p.11-53; oem_spec
Requires (stated)	Provision kit DFFPVA5262P2B if breaker not mounted	A	S304 pp. 1-4; oem_spec
Location neutral	Neutral lug on any of eight sites of upper/lower neutral cross bus (1/4-20 x 3/4), or auxiliary 3-hole sites on vertical neutral riser in 30 in wide enclosures (not with 24 in wide)	A	same as above

Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Requires	BBKVA5262P2HW (EDH-SIE-00113)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00116	**BNK2**	Neutral lug kit	—	listed (2019-2021)
EDH-SIE-00119	**BNKP2EX1**	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)	—	listed (2019-2021)
EDH-SIE-00118	**LPP2NB01**	Neutral lug kit	—	listed (2019-2021)

EDH-SIE-00116	**BNK2**	Siemens	neutral-assembly	LISTED (2019-2021)

Neutral lug kit

OEM part number	BNK2	A	S165 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, 3-step, for P2 neutrals and others: (14x) #14-1/0 max and (14x) #14-#6 max connections, with hardware & instructions	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-A-1862	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00119	**BNKP2EX1**	Siemens	neutral-assembly	LISTED (2019-2021)

P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)

OEM part number	BNKP2EX1	A	S165 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-1850-01 / 11-C-2011-01	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00118	LPP2NB01	Siemens	neutral-assembly	LISTED (2019-2021)

Neutral lug kit

OEM part number	LPP2NB01	**A**	S165, S348 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, 2-step, for P2 neutrals: (3x) #6-1/0 max and (18x) #14-#6 max, with hardware & instructions	**A**	S165 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Installation location	P2 neutral bus (250A/400A/600A arrangements shown)	**A**	S348 single sheet; oem_spec
Kit contents	1 2-step aluminum lug 15-A-1800-01; 2 mounting screws	**A**	same as above
Wire range	Larger holes max 1/0 Cu/Al (3 holes); smaller holes max #6 Cu/Al (18 holes); one wire per hole	**A**	same as above
Material	Aluminum	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1179-01 Rev. 00: LPP2NB01 neutral lug replacement / addition kit for P2 panelboard	**A**	same as above
Status	listed (2019-2021)	**A**	S165 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Identification features	Drawing ref 15-A-1800-61	**A**	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00232	**SEBKP2V1**	SEB kit, P2 BL/BQD horizontal main	BL or BQD main (outer bracket hole) **A**	unknown
EDH-SIE-00233	**SEBKP2V2**	SEB kit, P2 xGB horizontal main	xGB main (inner bracket hole) **A**	unknown
EDH-SIE-00234	**SEBKP2V3**	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main	Horizontally-mounted FD, CFD, QJ or QR main (tear perforated strip for **A**	unknown
EDH-SIE-00235	**SEBKP2V4**	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main	Vertically-mounted FD, CFD, QJ or QR main in P2 (two kits for extended **A**	unknown
EDH-SIE-00236	**SEBKP2V5**	SEB kit (P2, P2 w/SEM3) ED horizontal main	ED or CED main in P2 (with or without SEM3) **A**	unknown
EDH-SIE-00237	**SEBKP2V6**	SEB kit (P2, P2 w/SEM3) ED vertical main	Vertically-mounted ED main (two kits for extended-circuit P2 where ED **A**	unknown
EDH-SIE-00238	**SEBKP2V7**	SEB kit, P2/P3 3VA52/61/62 horizontal main	—	unknown
EDH-SIE-00408	**SEBKP3V3**	FD, QJ, QR horizontal main service entrance barrier (P2, P2 with SEM3, P3)	—	unknown

EDH-SIE-00232	SEBKP2V1	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2 BL/BQD horizontal main

OEM part number	SEBKP2V1	A	S165, S328 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2 BL/BQD horizontal main; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S328 single sheet; oem_spec
Breaker compatibility	BL or BQD main (outer bracket hole)	A	same as above
Kit contents	1 barrier support bracket; 1 barrier assembly; 1 large plastic ribbed shank rivet; 1 #8-32 x 9/32 IHWHSW screw	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Torque values	20 lb-in	A	S328 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1151-01 Rev. 00: SEBKP2V1 / SEBKP2V2 Service Entrance Barrier Kit for P2 Panelboards	A	same as above
Identification features	Drawing ref 11-D-2733-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00233	SEBKP2V2	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2 xGB horizontal main

OEM part number	SEBKP2V2	A	S165, S328 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2 xGB horizontal main; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S328 single sheet; oem_spec
Breaker compatibility	xGB main (inner bracket hole)	A	same as above
Kit contents	1 barrier support bracket; 1 barrier assembly; 1 rivet; 1 #8-32 x 9/32 IHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Torque values	20 lb-in	A	S328 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1151-01 Rev. 00: SEBKP2V1 / SEBKP2V2 Service Entrance Barrier Kit for P2 Panelboards	A	same as above
Identification features	Drawing ref 11-D-2734-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00234	SEBKP2V3	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main

OEM part number	SEBKP2V3	A	S165, S329 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S329 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted FD, CFD, QJ or QR main (tear perforated strip for QJ/QR in P2)	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S165 p.11-67; oem_spec
	1 barrier support assembly; 3 #8-32 x 9/32 IHWHSW; 1 P3 adapter (FD in P3)	A	S329 single sheet; oem_spec
Torque values	20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1153-01 Rev. 00: SEBKP2V3 Service Entrance Barrier Kit for P2 or P3 Panelboards (with or without SEM3)	A	same as above
Identification features	Drawing ref 11-D-2735-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00235	SEBKP2V4	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main

OEM part number	SEBKP2V4	A	S165, S330 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S330 single sheet; oem_spec
Breaker compatibility	Vertically-mounted FD, CFD, QJ or QR main in P2 (two kits for extended-circuit P2 where FD wire bending space >15 in)	A	same as above
Kit contents	1 barrier support assembly; 2 #8-32 x 9/32 IHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Dimensions	Mounted X above (top-fed) or below breaker support: X = 2.00 in FD/CFD in P2, 1.50 in QJ/QR in P2	A	S330 single sheet; oem_spec
Torque values	20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1154-01 Rev. 00: SEBKP2V4 / SEBKP3V1 Service Entrance Barrier Kits (vertical mains) for P2 / P3	A	same as above
Identification features	Drawing ref 11-D-2736-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00236	SEBKP2V5	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3) ED horizontal main

OEM part number	SEBKP2V5	A	S165, S331 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3) ED horizontal main; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S331 single sheet; oem_spec
Breaker compatibility	ED or CED main in P2 (with or without SEM3)	A	same as above
Kit contents	1 barrier support assembly; 1 #8-32 x 9/32 IHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Torque values	20 lb-in	A	S331 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1155-01 Rev. 00: SEBKP2V5 Service Entrance Barrier Kit for P2 (ED/CED main)	A	same as above
Identification features	Drawing ref 11-D-2738-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00237	SEBKP2V6	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3) ED vertical main

OEM part number	SEBKP2V6	A	S165, S332 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3) ED vertical main; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S332 single sheet; oem_spec
Breaker compatibility	Vertically-mounted ED main (two kits for extended-circuit P2 where ED wire bending space >8 in; second kit offset 2 in further)	A	same as above
Kit contents	1 barrier support assembly; 2 #8-32 x 9/32 IHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Dimensions	Mount 1 in above/below breaker support	A	S332 single sheet; oem_spec
Torque values	20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1156-01 Rev. 00: SEBKP2V6 Service Entrance Barrier Kit for P2 (vertical ED main)	A	same as above
Identification features	Drawing ref 11-D-2739-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00238	SEBKP2V7	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2/P3 3VA52/61/62 horizontal main

OEM part number	SEBKP2V7	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2/P3 3VA52/61/62 horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2898-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00408	SEBKP3V3	Siemens lineage	barrier	STATUS UNKNOWN

FD, QJ, QR horizontal main service entrance barrier (P2, P2 with SEM3, P3)

OEM part number	SEBKP3V3	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Description	FD, QJ, QR horizontal main service entrance barrier (P2, P2 with SEM3, P3): barrier, mounting brackets, hardware	A	same as above
Cross-links	Families: P2, P3		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00086	**DFK07**	P2/P3 deadfront center strip	—	listed (2021)
EDH-SIE-00087	**DFK08**	P2/P3 deadfront center strip	—	listed (2021)
EDH-SIE-00379	**DFK09**	P2/P3 deadfront center strip kit, 27 in flange length	—	unknown
EDH-SIE-00085	**DFK1**	P2/P3 deadfront center strip kit	—	listed (2021)
EDH-SIE-00380	**DFK10**	P2/P3 deadfront center strip kit, 30 in flange length	—	unknown
EDH-SIE-00381	**DFK11**	P2/P3 deadfront center strip kit, 33 in flange length	—	unknown
EDH-SIE-00382	**DFK12**	P2/P3 deadfront center strip kit, 36 in flange length	—	unknown
EDH-SIE-00383	**DFK13**	P2/P3 deadfront center strip kit, 39 in flange length	—	unknown
EDH-SIE-00384	**DFK14**	P2/P3 deadfront center strip kit, 42 in flange length	—	unknown
EDH-SIE-00385	**DFK15**	P2/P3 deadfront center strip kit, 45 in flange length	—	unknown
EDH-SIE-00386	**DFK16**	P2/P3 deadfront center strip kit, 48 in flange length	—	unknown
EDH-SIE-00387	**DFK17**	P2/P3 deadfront center strip kit, 51 in flange length	—	unknown
EDH-SIE-00388	**DFK18**	P2/P3 deadfront center strip kit, 54 in flange length	—	unknown
EDH-SIE-00389	**DFK19**	P2/P3 deadfront center strip kit, 57 in flange length	—	unknown
EDH-SIE-00390	**DFK20**	P2/P3 deadfront center strip kit, 60 in flange length	—	unknown
EDH-SIE-00391	**DFK21**	P2/P3 deadfront center strip kit, 63 in flange length	—	unknown

EDH-SIE-00086	DFK07	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip

OEM part number	DFK07	A	S165, S346 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip, 21in of unit space, with hardware	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	S346 single sheet, flange length table; oem_spec
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 21 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Status	listed (2021)	A	S165 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3018-67	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00087	DFK08	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip

OEM part number	DFK08	A	S165, S346 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip, 24in of unit space, with hardware (DFK09-DFK21 = 27in-63in in 3in steps)	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	S346 single sheet, flange length table; oem_spec
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 24 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Status	listed (2021)	A	S165 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3018-68	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00379	DFK09	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 27 in flange length

OEM part number	DFK09	A	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 27 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00085	DFK1	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip kit

OEM part number	DFK1	A	S165, S386, S254 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip kit: 7 lengths (3, 6, 9, 12, 15, 18, 21in of branch height) with mounting hardware, for 1in-pole breakers	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
	BL, BQD, ED deadfront kit for 1 in pole breakers: center strips 3, 6, 9, 15, 21 in plus mounting hardware (instruction sheet 12-A-1082-01 lists 3/6/9/12/15/18/21 in)	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions on P2 deadfront, any 3 in increment 3-21 in (select strip by side-flange length = opening length)	A	S386 single sheet (image); oem_spec
Kit contents	Fill center strips 3, 6, 9, 12, 15, 18 and 21 in (one each); 4 8-32 x 9/16 self-threading screws	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1082-01 Rev. 0: P2 Panelboard Kit DFK1 For Dead Front Coverage of 1in Pole Breaker Modules	A	same as above
Status	listed (2021)	A	S165 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2273-01 (strips 11-D-3018-01 thru -07)	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41, ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00380	DFK10	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 30 in flange length

OEM part number	DFK10	A	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 30 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00381	DFK11	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 33 in flange length

OEM part number	DFK11	A	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 33 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00382	DFK12	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 36 in flange length

OEM part number	DFK12	A	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 36 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00383	DFK13	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 39 in flange length

OEM part number	DFK13	**A**	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	**A**	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	**A**	same as above
Dimensions	Center plate flange length 39 in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	**A**	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00384	DFK14	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 42 in flange length

OEM part number	DFK14	**A**	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	**A**	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	**A**	same as above
Dimensions	Center plate flange length 42 in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	**A**	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00385	DFK15	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 45 in flange length

OEM part number	DFK15	**A**	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	**A**	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	**A**	same as above
Dimensions	Center plate flange length 45 in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	**A**	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00386	DFK16	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 48 in flange length

OEM part number	DFK16	**A**	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	**A**	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	**A**	same as above
Dimensions	Center plate flange length 48 in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	**A**	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00387	DFK17	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 51 in flange length

OEM part number	DFK17	A	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 51 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00388	DFK18	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 54 in flange length

OEM part number	DFK18	A	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 54 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00389	DFK19	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 57 in flange length

OEM part number	DFK19	A	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 57 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00390	DFK20	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 60 in flange length

OEM part number	DFK20	A	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 60 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00391	DFK21	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 63 in flange length

OEM part number	DFK21	A	S346 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 63 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00076	**DFFP3**	Deadfront filler kit	—	listed (2021)
EDH-SIE-00077	**DFFP6**	Deadfront filler kit	—	listed (2021)
EDH-SIE-00078	**DFFPVA5262P2A**	3VA52/61/62 filler for single mount P2/P3 applications	—	listed (2021)
EDH-SIE-00079	**DFFPVA5262P2B**	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)	—	listed (2021)
EDH-SIE-00084	**DFP3AP01**	P3 adapter plate	—	listed (2021)
EDH-SIE-00082	**P2QRFP01**	P2 QR deadfront filler	—	listed (2021)

EDH-SIE-00076	DFFP3	Siemens	filler-plate	LISTED (2021)

Deadfront filler kit

OEM part number	DFFP3	A	S165, S387, S254 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	Deadfront filler kit, 3in high blank steel plates for both P2 (11-D-3014-02) and P3 (11-D-3035-02, 2.97in); hardware & instructions included	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
	Deadfront filler 3 in: 3 in empty space filler and hardware	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	Covers a 3 in portion of branch unit space with no installed branches/provisions; distance to next full-width plate must be a multiple of 3 in	A	S387 single sheet (image); oem_spec
Kit contents	1 P2 3 in blank deadfront plate; 1 P3 3 in blank deadfront plate; 4 8-32 x 9/32 self-threading screws	A	same as above
Material	steel	A	S165 p.11-23; oem_spec
Dimensions	3in high (P3 plate 2.97in)	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1083-01 Rev. 0: P2 & P3 Panelboard Kit DFFP3 For Dead Front Coverage of a 3 in Unallocated Branch Space	A	S387 single sheet (image); oem_spec
Status	listed (2021)	A	S165 p.11-53; oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BP2FP3 ('3 in deadfront filler blank for P1/P2 (description lists DFFP3)'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Identification features	Eng./drawing ref 11-D-2269-01	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00077	DFFP6	Siemens	filler-plate	LISTED (2021)

Deadfront filler kit

OEM part number	DFFP6	A	S165, S388, S254 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	Deadfront filler kit, 6in high blank steel plates for both P2 (11-D-3014-01) and P3 (11-D-3035-01, 5.97in); hardware & instructions included	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
	Deadfront filler 6 in: 6 in empty space filler and hardware	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	Covers a 6 in portion of branch unit space with no installed branches/provisions; distance to next full-width plate must be a multiple of 3 in	A	S388 single sheet (image); oem_spec
Kit contents	1 P2 6 in blank deadfront plate; 1 P3 6 in blank deadfront plate; 4 8-32 x 9/32 self-threading screws	A	same as above
Material	steel	A	S165 p.11-23; oem_spec
Dimensions	6in high (P3 plate 5.97in)	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1084-01 Rev. 0: P2 & P3 Panelboard Kit DFFP6 For Dead Front Coverage of a 6 in Unallocated Branch Space	A	S388 single sheet (image); oem_spec
Status	listed (2021)	A	S165 p.11-53; oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BP2FP6 ('6 in deadfront filler blank for P1/P2 (description lists DFFP6)'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Identification features	Eng./drawing ref 11-D-2270-01	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00078	DFFPVA5262P2A	Siemens	filler-plate	LISTED (2021)

3VA52/61/62 filler for single mount P2/P3 applications

OEM part number	DFFPVA5262P2A	A	S165, S344 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	3VA52/61/62 filler for single mount P2/P3 applications, 1 piece	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Kit contents	1 3VA52/61/62 single mount filler plate, Siemens piece no. 11-D-4610-01	A	S344 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1052-01 Rev. 00: DFFPVA5262P2A filler plate (3VA52/61/62 single mount) installation	A	same as above
Status	listed (2021)	A	S165 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4610-01	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
	Pair of grooves one side, pair of snaps other side; 'ON' marking aligns with breaker ON side	A	S344 single sheet; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00079	DFFPVA5262P2B	Siemens	filler-plate	LISTED (2021)

3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)

OEM part number	DFFPVA5262P2B	**A**	S165, S345 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)	**A**	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Kit contents	1 provision plate 11-D-3340-01; 1 provision barrier 11-D-4614-01 (fastened to B-phase strap); 1 provision label 11-B-1049-01; 4 #8-32 screws 11-1512-03	**A**	S345 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1053-01 Rev. 00: DFFPVA5262P2B Provision Plate kit installation	**A**	same as above
Status	listed (2021)	**A**	S165 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3340-01 / 11-D-4614-01	**A**	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00084	DFP3AP01	Siemens	filler-plate	LISTED (2021)

P3 adapter plate

OEM part number	DFP3AP01	**A**	S165, S347 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P3 adapter plate: fills 3in of unit space on one side of the deadfront so BL/BQD/ED/xGB/3VA41 breakers and DFFP1A fillers fit	**A**	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Kit contents	1 adaptor plate 11-D-3033-01; 2 mounting screws	**A**	S347 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1178-01 Rev. 00: DFP3AP01 replacement Adaptor Plate for BL/BQD/ED/GB/GB2 breaker in P3	**A**	same as above
Status	listed (2021)	**A**	S165 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3033-61 (11-D-3033-01)	**A**	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
	Slight offset bend near mounting holes (mounting portion higher than part over breaker); unused positions closed with DFFP1 fillers	**A**	S347 single sheet; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41, ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00082	P2QRFP01	Siemens	filler-plate	LISTED (2021)

P2 QR deadfront filler

OEM part number	P2QRFP01	**A**	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2 QR deadfront filler, plastic snap-in, vertical main position, 1 per package	**A**	same as above
Status	listed (2021)	**A**	S165 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4564-01	**A**	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00113	**BBKVA5262P2HW**	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	Hardware kit for branch/main horizontal single mount or vertical mount **A**	current
EDH-SIE-00120	**P2BK1**	P2 250A max horizontal main breaker bonding strap kit	—	listed (2019-2021)
EDH-SIE-00121	**P2BK2**	P2 125A max main lug bonding strap assembly	—	listed (2019-2021)
EDH-SIE-00122	**P2BK3**	P2 250-600A MLO and all vertical MB bonding kit	—	listed (2019-2021)

EDH-SIE-00113	BBKVA5262P2HW	Siemens	hardware-kit	CURRENT

Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3

OEM part number	BBKVA5262P2HW	A	S165, S303 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space)	A	same as above
Breaker compatibility	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	A	same as above
Kit contents	3 3VA52 nut keepers; 3 3VA61/62 nut keepers; 3 bus extensions; 3 socket-head screws; 2 pan-head (breaker mounting) screws	A	S303 single sheet; oem_spec
Torque values	#8-32 x 3 SHRMS 13.3 +/- 1.8 lb-in; 5/16-18 x 3/4 machine screw (bus extension to strap) 177 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1050-01 Rev. 01: BBKVA5262P2HW hardware kit instructions (3VA52/61/62 breaker to P2/P3 strap kit)	A	same as above
Status	current	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Identification features	Drawing ref 11-D-2895-61	A	S165 p.11-53; oem_spec
	Nut keepers differ for 3VA52 vs 3VA61/62 and only fully seat in their own breaker cavity; bus extension anti-turn protrusions engage top of stabs, smaller hole toward breaker	A	S303 single sheet; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00120	P2BK1	Siemens	hardware-kit	LISTED (2019-2021)

P2 250A max horizontal main breaker bonding strap kit

OEM part number	P2BK1	A	S165 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 250A max horizontal main breaker bonding strap kit	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-D-2068-01	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00121	P2BK2	Siemens	hardware-kit	LISTED (2019-2021)

P2 125A max main lug bonding strap assembly

OEM part number	P2BK2	A	S165 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 125A max main lug bonding strap assembly	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-D-2068-02	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00122	P2BK3	Siemens	hardware-kit	LISTED (2019-2021)

P2 250-600A MLO and all vertical MB bonding kit

OEM part number	P2BK3	A	S165 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 250-600A MLO and all vertical MB bonding kit	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-D-2068-03	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00080	**BBKQRP1FK**	P2 filler kit for QR	—	listed (2021)

EDH-SIE-00080	BBKQRP1FK	Siemens	conversion-kit	LISTED (2021)

P2 filler kit for QR

OEM part number	BBKQRP1FK	A	S165, S315 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2 filler kit for QR, horizontal or vertical mount; all cover plates to change from QJ to QR, 2- and 3-pole	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Application	P2 panelboards, 1-ph or 3-ph, main, subfeed or branch; single-phase 2-pole top-fed vertically mounted not supported; also QJ-to-QR change (2-pole horizontal requires moving long strap; replace QJ deadfront plate)	A	S315 single sheet; oem_spec
Kit contents	QR plastic filler for vertical P2; QR plastic filler for horizontal P2; QR deadfront plate for horizontal P2; MAIN label; SERVICE DISCONNECT label; 4 #8-32 x 3/8 HWH screws	A	same as above
Dimensions	6.00 in kit unit space; 2.50 in and 1.50 in connector spacing (horizontal 2-pole)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1135-01 Rev. 00: BBKQRP1FK filler kit for horizontally or vertically mounted 225A MAX QR breaker (P2)	A	same as above
Status	listed (2021)	A	S165 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2644-01 (contains 11-D-3282-01, 11-D-4563-01, 11-D-4564-01)	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00411	**NBK3**	P2/P3 snap-in number strips 1-42	—	unknown
EDH-SIE-00412	**NBK4**	P2/P3 snap-in number strips 43-84	—	unknown
EDH-SIE-00413	**NBK5**	P2/P3 snap-in number strips 85-126	—	unknown
EDH-SIE-00414	**NBK6**	P2/P3 snap-in number strips 127-168	—	unknown
EDH-SIE-00415	**NBK7**	P2/P3 snap-in number strips 169-210	—	unknown
EDH-SIE-00416	**NBK8**	P2/P3 snap-in number strips 211-252	—	unknown

EDH-SIE-00411	NBK3	Siemens lineage	other	STATUS UNKNOWN

P2/P3 snap-in number strips 1-42

OEM part number	NBK3	A	S254, S165 p. 11-48 (revised 05/15/18); oem_spec
Description	Number strips 1-42, snap-in type; use with P2 & P3 series panels	A	S254 p. 11-48 (revised 05/15/18); oem_spec
	Circuit numbering, push-in type, numbers 1-42, for P2/P3 panelboards.	A	S165 p. 11-35, Circuit Numbering (P2 / P3 Push-in); oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00412	NBK4	Siemens lineage	other	STATUS UNKNOWN

P2/P3 snap-in number strips 43-84

OEM part number	NBK4	A	S254, S165 p. 11-48 (revised 05/15/18); oem_spec
Description	Number strips 43-84, snap-in type; use with P2 & P3 series panels	A	S254 p. 11-48 (revised 05/15/18); oem_spec
	Circuit numbering, push-in type, numbers 43-84, for P2/P3 panelboards.	A	S165 p. 11-35, Circuit Numbering (P2 / P3 Push-in); oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00413	NBK5	Siemens lineage	other	STATUS UNKNOWN

P2/P3 snap-in number strips 85-126

OEM part number	NBK5	A	S254, S165 p. 11-48 (revised 05/15/18); oem_spec
Description	Number strips 85-126, snap-in type; use with P2 & P3 series panels	A	S254 p. 11-48 (revised 05/15/18); oem_spec
	Circuit numbering, push-in type, numbers 85-126, for P2/P3 panelboards.	A	S165 p. 11-35, Circuit Numbering (P2 / P3 Push-in); oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00414	NBK6	Siemens lineage	other	STATUS UNKNOWN

P2/P3 snap-in number strips 127-168

OEM part number	NBK6	A	S254, S165 p. 11-48 (revised 05/15/18); oem_spec
Description	Number strips 127-168, snap-in type; use with P2 & P3 series panels	A	S254 p. 11-48 (revised 05/15/18); oem_spec
	Circuit numbering, push-in type, numbers 127-168, for P2/P3 panelboards.	A	S165 p. 11-35, Circuit Numbering (P2 / P3 Push-in); oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00415	NBK7	Siemens lineage	other	STATUS UNKNOWN

P2/P3 snap-in number strips 169-210

OEM part number	NBK7	A	S254, S165 p. 11-48 (revised 05/15/18); oem_spec
Description	Number strips 169-210, snap-in type; use with P2 & P3 series panels	A	S254 p. 11-48 (revised 05/15/18); oem_spec
	Circuit numbering, push-in type, numbers 169-210, for P2/P3 panelboards.	A	S165 p. 11-35, Circuit Numbering (P2 / P3 Push-in); oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00416	NBK8	Siemens lineage	other	STATUS UNKNOWN

P2/P3 snap-in number strips 211-252

OEM part number	NBK8	A	S254, S165 p. 11-48 (revised 05/15/18); oem_spec
Description	Number strips 211-252, snap-in type; use with P2 & P3 series panels	A	S254 p. 11-48 (revised 05/15/18); oem_spec
	Circuit numbering, push-in type, numbers 211-252, for P2/P3 panelboards.	A	S165 p. 11-35, Circuit Numbering (P2 / P3 Push-in); oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Material, Status		

6.6 P3 — Type P3 panelboard

FAM-SIE-006 · panelboard · aka P3 · markings: Siemens

Siemens 24in wide x 7.75in deep lighting/distribution panelboard sized like a lighting panel; unit-space construction with twin-mount strap kits (BBKB32 etc.), QJ/QR twin kits and 3VA52 twin kits (max 6 large-frame breakers in unit space).

Attribute	Value	Cl.	Sources
Status	current	A	S165 p.11-58; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NEB / HEB, QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H

Key documents: S165 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S170 Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)

Also fits this family (entry printed elsewhere): LNLK4X11B, LNLK6X17B, LNLK7X20B, DFFP1A, QF3, DFFPVA5363A, DFFPFD01, DFFPJD01, DFFP3, DFFP6, DFFPVA5262P2A, DFFPVA5262P2B, DFP3AP01, DFK1, DFK07, DFK08, IMK1, EGK, ECGK, IGK, ICGK, BBKB32, BBKVA4P2P3, BBKED32, BBKNB32, BBKGB32, BBKVA5262P2S, BBKVA5262P2HW, BNK350N, SEBKP1P2P3V1, SEBKP2V3, SEBKP2V4, SEBKP2V7, EWK1, EWK2, EWK1B, EWK2B, DFK09, DFK10, DFK11, DFK12, DFK13, DFK14, DFK15, DFK16, DFK17, DFK18, DFK19, DFK20, DFK21, LPDC01, LPLOCK01A, LPLOCK02A, SEBKP3V3, NBK3, NBK4, NBK5, NBK6, NBK7, NBK8, LPJSPDNUT01, ECPLD1, ECPLD1R, ECPLD2, ECPLD2R, ECPLD3, ECPLD3R, ECQLD3, ECQTH4, ECQTH3, ECBX231M, ECQML12, MB120, FP9508, FP9555, FP9556, SMB6R, TCH65K, BR2, BR3, BR4, ECQL1, BQDHT2, BQDHT3, HPLQR, BQDPLD, HPLG, ED2HPL, FD6PL1, JD6HPL, MN6PLD, HBLQR, BQDHBD, E2HBL, FD6HB1, JD6HBL, MN6BL, EX11, SBMIQR, CQDST120, CQDST240, CQDST277, CQDST480, CQDST600, CQDST12, CQDST24, CQDST48, CQDST125, CQDA1, CQDA2, CQDBA, CQDST120AAS, CQDA1BA, S01QR2, S07QR2, A01QR2, A02QR2, MCHK, LPTS01, LPKEY01A, LPKEY01B, LPLOCK03A, LP3RHP01

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00107	**BBKEB32**	P3 NEB/HEB 6-pole 3in branch breaker kit	P3 NEB/HEB 6-pole 3in branch breaker kit A	listed 2019 (p.11-67)
EDH-SIE-00111	**BBKQ2**	P3 branch breaker kit for 2- and 3-pole QJ twin mount	P3 branch breaker kit for 2- and 3-pole QJ twin mount A	listed 2019 (p.11-67); QJ superseded by QR
EDH-SIE-00109	**BBKQR2**	P3 twin breaker mounting kit for QR	P3 twin breaker mounting kit for QR A	current
EDH-SIE-00114	**BBKVA52P3T**	P3 strap kit	P3 strap kit A	current

EDH-SIE-00107	BBKEB32	Siemens	branch-connector-kit	LISTED 2019 (P.11-67)

P3 NEB/HEB 6-pole 3in branch breaker kit

OEM part number	BBKEB32	**A**	S165, S368, S254 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 NEB/HEB 6-pole 3in branch breaker kit	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	(P3) NEB/HEB 6-pole 3 in branch breaker kit: top barrier, (3) A/C connectors, (1) B connector, hardware	**A**	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	**A**	S368 pp. 2-4 (image); oem_spec
Breaker compatibility	P3 NEB/HEB 6-pole 3in branch breaker kit	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Siemens EB (NEB or HEB) breakers; 1-ph or 3-ph	**A**	S368 pp. 2-4 (image); oem_spec
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	**A**	S165 p.11-67; oem_spec
	1 EB breaker mounting barrier (threaded inserts); 3 outer connector bus; 1 center connector bus; 6 1 in deadfront fillers; 2 P3 deadfront adaptor plates; 12 8-32 self-threading; 3 1/4-20 x 1 self-threading; 6 10-24 x 5/8 self-threading	**A**	S368 pp. 2-4 (image); oem_spec
Dimensions	Unit space: 3in / 6 circuits	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 3 in of branch unit space	**A**	S368 pp. 2-4 (image); oem_spec
Fasteners	Connectors three 1/4-20 x 1 to panel bus; line stabs 10-24 x 5/8; breaker to barrier with 6-32 x 2-3/4 machine screws supplied with breaker (overtightening can strip threaded inserts); #6 screw clip with 1-pole EB	**A**	same as above
Torque values	Per back-of-deadfront label	**A**	same as above
OEM instruction document	Siemens instruction sheet 12-A-1093-01 Rev. 1: P3 Panelboard Kit BBKEB32 For Branch Mounting of EB Breakers (scanned; read visually)	**A**	same as above
Status	listed 2019 (p.11-67)	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: NEB / HEB		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00111	**BBKQ2**	Siemens	branch-connector-kit	**LISTED 2019 (P.11-67);**

P3 branch breaker kit for 2- and 3-pole QJ twin mount

OEM part number	BBKQ2	**A**	S165, S367, S254 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec

Description	P3 branch breaker kit for 2- and 3-pole QJ twin mount	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	(P3) branch breaker kit for 2 and 3-pole QJ twin mount: all connectors and cover plates	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S367 pp. 2-4 (image); oem_spec
Breaker compatibility	P3 branch breaker kit for 2- and 3-pole QJ twin mount	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	One or two Siemens QJ breakers: 2-pole on 1-ph, 2- or 3-pole on 3-ph	A	S367 pp. 2-4 (image); oem_spec
Kit contents	all connectors and cover plates to mount both 2- and 3-pole breakers	A	S165 p.11-67; oem_spec
	2 QJ breaker supports; 1 QJ outer connector type A; 2 QJ outer connector type B; 1 QJ center connector; 1 QJ branch barrier; 2 branch neutral lugs; 1 QJ branch deadfront plate type A (1-ph); 1 type B (3-ph); 2 QJ breaker deadfront adaptors; 1 QJ provision filler plate; 8 8-32 x 9/32 self-threading; 6 1/4-20 x 5/8 self-threading; 4 1/4-20 x 3/4 self-threading; 6 1/4-20 x 1 self-threading; 4 1/4-20 x 2-1/2 machine screws; 2 #10 carriage bolts; 2 flat washers; 2 nuts	A	S367 pp. 2-4 (image); oem_spec
Dimensions	Requires 6 in of branch unit space (figure: 5.5 in, 2.5 in, 6.0 in)	A	same as above
Fasteners	Breaker supports to base rails four 8-32; center connector two 1/4-20 x 1 to middle bus; outer connectors 1/4-20 x 1; breaker to support 1/4-20 x 2-1/2 machine screw; line pads 1/4-20 x 5/8; neutral lugs four 1/4-20 x 3/4 on any of eight neutral cross-bus sites	A	same as above
Torque values	Per back-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1081-01 Rev. 1: P3 Panelboard Kit BBKQ2 For Branch Mounting of QJ Breakers (scanned; read visually)	A	same as above
Status	listed 2019 (p.11-67); QJ superseded by QR	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00109 **BBKQR2** Siemens branch-connector-kit **CURRENT**

P3 twin breaker mounting kit for QR

OEM part number	BBKQR2	A	S165, S302, S254 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 twin breaker mounting kit for QR, 1-phase/3-phase (limit 6 QR per panel)	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	P3 twin breaker mounting kit for QR 1-phase/3-phase (limit 6 QR per panel; QR limited to 225 A in panelboard)	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec

Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S302 pp. 1-4; oem_spec
Breaker compatibility	P3 twin breaker mounting kit for QR	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H	A	S302 pp. 1-4; oem_spec
Current rating	225A max	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	all connectors and cover plates to mount both 2- and 3-pole breakers	A	S165 p.11-67; oem_spec
	2 QR breaker supports; 1 QR outer connector bus type A; 2 type B; 1 QR center connector; 1 QR branch barrier; 2 branch neutral lugs; QR branch deadfront plate type A (1-ph) and type B (3-ph); 2 QR breaker deadfront escutcheons; 1 QR provision filler plate; 8 #8-32 x 9/32 thread-forming (30 lb-in); 6 1/4-20 x 5/8 (72); 4 1/4-20 x 3/4 (72); 6 1/4-20 x 1 (72); 4 1/4-20 x 2-1/2 machine screws (30); 2 #10 carriage bolts; 2 nuts (20 lb-in)	A	S302 pp. 1-4; oem_spec
Dimensions	Unit space: 6in / 2 breakers	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 6 in of branch unit space (two breakers, 5.50 / 6.00 in figure dims)	A	S302 pp. 1-4; oem_spec
Torque values	#8-32 30 lb-in; 1/4-20 thread-forming 72 lb-in; 1/4-20 x 2-1/2 machine 30 lb-in; provision filler nuts 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1132-01 Rev. 00: P3 Panelboard Kit BBKQR2 Installation Instructions for Branch Mounting of 225A MAX QR Breakers	A	same as above
Status	current	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00114 **BBKVA52P3T** Siemens branch-connector-kit **CURRENT**

P3 strap kit

OEM part number	BBKVA52P3T	A	S165, S306, S254 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 strap kit, twin mount 3VA52 (TMTU) branch, 1ph or 3ph, 250A max	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	P3 strap kit, twin mount 3VA52 branch; uses 6 in unit space; includes 2x BBKVA52P3HW, barrier, straps & mounting hardware (max 6 large-frame breakers QR + 3VA52)	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Supersedes breaker-supplied instructions for applications above 500 V	A	S306 pp. 1-4; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	same as above

Breaker compatibility	P3 strap kit	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	250A MAX 3VA52 MFAS, HFAS, CFAS; 2-pole FAS on 1-ph (A and C only) or 2/3-pole FAS on 3-ph	**A**	S306 pp. 1-4; oem_spec
Current rating	250A max	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	2x BBKVA52P3HW, barrier, straps, mounting hardware	**A**	S165 p.11-67; oem_spec
	1 FAS P3 top barrier; 2 FAS A/C-phase straps; 1 FAS B-phase strap (dual-mount); 2 350 kcmil lugs; 1 P3 cover plate; 2 provision filler assemblies; 6 screw retainers; 6 5/16-18 x 3/4 socket head screws (144 lb-in); 4 #8-32 x 3-1/4 SRHMS (20 lb-in); 4 1/4-20 x 3/4 thread-forming (50/72 lb-in); 6 #8-32 x 3/8 HWH (30 lb-in); 4 #10-24 x 5/8 RHSNB (20 lb-in); 4 #10 lock nuts (20 lb-in); 6 1/4-20 x 1 thread-forming (50/72 lb-in)	**A**	S306 pp. 1-4; oem_spec
Dimensions	Unit space: 6in / 2 breakers	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 6 in of branch unit space	**A**	S306 pp. 1-4; oem_spec
Torque values	1/4-20 thread-forming: 50 lb-in aluminum bus / 72 lb-in copper bus; strap screws 144 lb-in; breaker mounting 20 lb-in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1167-01 Rev. 00: P3 Panelboard Kit BBKVA52P3T Installation Instructions for Branch Mounting of Twin FAS (3VA52) Breakers	**A**	same as above
Status	current	**A**	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Requires	BBKVA52P3HW (EDH-SIE-00115)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00239	**SEBKP3V1**	Service entrance barrier kit CFD, FD (P3 only)	Vertically-mounted FD or CFD main in P3 **A**	unknown

EDH-SIE-00239	SEBKP3V1	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier kit CFD, FD (P3 only)

OEM part number	SEBKP3V1	A	S165, S330, S254 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	Service entrance barrier kit CFD, FD (P3 only); field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
	Service entrance barrier kit CFD, FD (P3 only): barrier, mounting brackets, hardware; required by UL 67	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S330 single sheet; oem_spec
Breaker compatibility	Vertically-mounted FD or CFD main in P3	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S165 p.11-67; oem_spec
	1 barrier support assembly; 4 #8-32 x 9/32 IHWHSW; 2 P3 adapters	A	S330 single sheet; oem_spec
Dimensions	X = 1.63 in from breaker support (1.00 in breaker support to P3 adapter mount hole)	A	same as above
Torque values	20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1154-01 Rev. 00: SEBKP2V4 / SEBKP3V1 Service Entrance Barrier Kits (vertical mains) for P2 / P3	A	same as above
Identification features	Drawing ref (p.11-67)	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00407	**DFFP1**	1 in filler plate for BL/BQD/xGB/xGB2/ED blank positions; suitable for replacing QF3 in P1 thru P5 panelboards and switchboards	—	unknown
EDH-SIE-00083	**EBF1**	NEB/HEB filler plate (EB deadfront filler)	EB A	listed (2021)

EDH-SIE-00407	DFFP1	Siemens lineage	filler-plate	STATUS UNKNOWN

1 in filler plate for BL/BQD/xGB/xGB2/ED blank positions; suitable for replacing QF3 in P1 thru P5 panelboards and switchboards

OEM part number	DFFP1	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Description	1 in filler plate for BL/BQD/xGB/xGB2/ED blank positions; suitable for replacing QF3 in P1 thru P5 panelboards and switchboards	A	same as above
Cross-links	Families: P3		

EDH-SIE-00083	EBF1	Siemens	filler-plate	LISTED (2021)

NEB/HEB filler plate (EB deadfront filler)

OEM part number	EBF1	A	S165, S382, S254, S589 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	NEB/HEB filler plate (EB deadfront filler)	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
	EB deadfront filler plate placed over empty EB breaker location; align filler plate mounting hole with existing hole in deadfront (orient as shown) and attach with supplied hardware	A	S382 card 11-D-1017-01; oem_spec
	HEB/NEB filler plate	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	Per pole	A	S589 pp.13-17, 13-20; oem_spec
Breaker compatibility	EB	A	same as above
Kit contents	EB filler plate and mounting hardware	A	S382 card 11-D-1017-01; oem_spec
OEM instruction document	Siemens instruction sheet 11-D-1017-01 Rev. 0: EB Deadfront Filler EBF1 installation instruction card (drawing 11-D-1017)	A	same as above
Status	listed (2021)	A	S165 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4529-01	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P3, P4, P5, SB, CDP6, SBP · Breakers: NEB / HEB		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00417	**24WD56**	P3 box 24 in wide x 56 in high	—	unknown
EDH-SIE-00418	**24WD62**	P3 box 24 in wide x 62 in high	—	unknown
EDH-SIE-00419	**24WD68**	P3 box 24 in wide x 68 in high	—	unknown
EDH-SIE-00420	**24WD74**	P3 box 24 in wide x 74 in high	—	unknown
EDH-SIE-00421	**24WD80**	P3 box 24 in wide x 80 in high	—	unknown

EDH-SIE-00417	24WD56	Siemens lineage	box/enclosure	STATUS UNKNOWN

P3 box 24 in wide x 56 in high

OEM part number	24WD56	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Description	P3 standard Type 1 box 56 in high; trims P3S56 (surface) / P3F56 (flush); Type 3R 24NRD56; Type 3R/12 24WPD56; trim suffixes H hinged, D door-in-door, M metal card holder	A	same as above
Cross-links	Families: P3		

EDH-SIE-00418	24WD62	Siemens lineage	box/enclosure	STATUS UNKNOWN

P3 box 24 in wide x 62 in high

OEM part number	24WD62	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Description	P3 standard Type 1 box 62 in high; trims P3S62 (surface) / P3F62 (flush); Type 3R 24NRD62; Type 3R/12 24WPD62; trim suffixes H hinged, D door-in-door, M metal card holder	A	same as above
Cross-links	Families: P3		

EDH-SIE-00419	24WD68	Siemens lineage	box/enclosure	STATUS UNKNOWN

P3 box 24 in wide x 68 in high

OEM part number	24WD68	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Description	P3 standard Type 1 box 68 in high; trims P3S68 (surface) / P3F68 (flush); Type 3R 24NRD68; Type 3R/12 24WPD68; trim suffixes H hinged, D door-in-door, M metal card holder	A	same as above
Cross-links	Families: P3		

EDH-SIE-00420	24WD74	Siemens lineage	box/enclosure	STATUS UNKNOWN

P3 box 24 in wide x 74 in high

OEM part number	24WD74	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Description	P3 standard Type 1 box 74 in high; trims P3S74 (surface) / P3F74 (flush); Type 3R 24NRD74; Type 3R/12 24WPD74; trim suffixes H hinged, D door-in-door, M metal card holder	A	same as above
Cross-links	Families: P3		

EDH-SIE-00421	24WD80	Siemens lineage	box/enclosure	STATUS UNKNOWN

P3 box 24 in wide x 80 in high

OEM part number	24WD80	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Description	P3 standard Type 1 box 80 in high; trims P3S80 (surface) / P3F80 (flush); Type 3R 24NRD80; Type 3R/12 24WPD80; trim suffixes H hinged, D door-in-door, M metal card holder	A	same as above
Cross-links	Families: P3		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00115	**BBKVA52P3HW**	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & A	current
EDH-SIE-00409	**BBKVR52P3HW**	P3 branch breaker hardware kit (catalog spelling; instruction sheet uses BBKVA52P3HW)	—	unknown
EDH-SIE-00406	**BK1**	Bonding kit for 250A max. and all P1 panels	—	unknown
EDH-SIE-00123	**P3BK1**	P3 bonding kit 800A max MLO+MB	—	listed (2019-2021)

EDH-SIE-00115	BBKVA52P3HW	Siemens	hardware-kit	CURRENT

P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws

OEM part number	BBKVA52P3HW	A	S165, S305 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space)	A	same as above
	Supersedes instructions supplied with the breaker for applications above 500 V	A	S305 single sheet; oem_spec
Breaker compatibility	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	screw retainers & mounting screws	A	S165 p.11-67; oem_spec
	3 screw retainers; 3 strap screws; 2 breaker mounting screws	A	S305 single sheet; oem_spec
Torque values	Strap 5/16-18 x 3/4 SHWHS 144 lb-in; breaker mounting #8-32 x 3-1/4 SRHMS 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1166-01 Rev. 00: BBKVA52P3HW hardware kit instructions (3VA52 FAS breaker in P3 twin strap kit; supersedes breaker instructions above 500 V)	A	same as above
Status	current	A	S165 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00409	BBKVR52P3HW	Siemens lineage	hardware-kit	STATUS UNKNOWN

P3 branch breaker hardware kit (catalog spelling; instruction sheet uses BBKVA52P3HW)

OEM part number	BBKVR52P3HW	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Alternate / superseded numbers	BBKVA52P3HW [alias]	A	same as above
Description	P3 branch breaker hardware kit: screw retainers & mounting screws	A	same as above
Cross-links	Families: P3		

EDH-SIE-00406	BK1	Siemens lineage	hardware-kit	STATUS UNKNOWN

Bonding kit for 250A max. and all P1 panels

OEM part number	BK1	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Description	Bonding kit for 250A max. and all P1 panels	A	same as above
Cross-links	Families: P3		

EDH-SIE-00123	P3BK1	Siemens	hardware-kit	LISTED (2019-2021)

P3 bonding kit 800A max MLO+MB

OEM part number	P3BK1	A	S165, S383, S254 p.11-67; oem_spec
Description	P3 bonding kit 800A max MLO+MB: bonding strap and hardware	A	S165 p.11-67; oem_spec
	P3 bonding kit: bonding strap and hardware	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Kit contents	Bonding strap; long bonding screw; short bonding screw	A	S383 card 11-D-1007-01; oem_spec
OEM instruction document	Align bonding strap below neutral barrier with first hole on neutral (above for bottom feed); long bonding screw through strap into neutral; short bonding screw into base rail through strap	A	same as above
Status	listed (2019-2021)	A	S165 p.11-67; oem_spec
Identification features	Drawing ref (p.11-67)	A	same as above
Cross-links	Families: P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00081	**BBKQRP2FK**	P3 filler kit for QR	—	listed (2021)

EDH-SIE-00081	BBKQRP2FK	Siemens	conversion-kit	LISTED (2021)

P3 filler kit for QR

OEM part number	BBKQRP2FK	A	S165, S316, S254 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P3 filler kit for QR, dual mount horizontal; cover plates to change from QJ to QR (1-phase panel: both breakers must change)	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
	P3 filler for QR, dual mount horizontal: cover plates to change QJ to QR (2/3-pole); in 1-phase panel both breakers must change	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	Converting both branch locations to QR breakers in all Siemens P3 panelboards, or single QJ-to-QR location in 3-phase panels only	A	S316 single sheet; oem_spec
Kit contents	2 QR plastic fillers for P3; QR deadfront plate for 2-pole P3; QR deadfront plate for 3-pole P3; hybrid deadfront plate for P3 (QR + QJ); provision steel filler plate; 2 #10-24 x 5/8 RH square neck bolts; 2 #10-24 lock nuts; 4 #8-32 HWH screws	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1136-01 Rev. 00: BBKQRP2FK filler kit for dual-mounted horizontal 225A MAX QR breakers (P3)	A	same as above
Status	listed (2021)	A	S165 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4565-01, 11-D-3283-01, 11-D-3284-01, 11-D-3288-01, 12-6812-34	A	S165 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P3 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00410	**LPDC02**	Directory card holder (pack of 10)	—	unknown

EDH-SIE-00410	LPDC02	Siemens lineage	other	STATUS UNKNOWN

Directory card holder (pack of 10)

OEM part number	LPDC02	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Description	Directory card holder, pack of 10 (ref. 11-1824-01)	A	same as above
Cross-links	Families: P3		

6.7 P4 — Type P4 / S4 / Sentron SPP (10in deep) power panelboard

FAM-SIE-007 · panelboard · aka F1, FPP (10in), S4, SPP, Sentron SPP shallow · markings: Siemens

Siemens 10in-deep distribution (power) panelboard. Branch circuit breakers mount in unit space on 'Connecting Strap Kits' (S* series, e.g. SBL, SE6, SQR, SF6, SJ1, SL6) supplied without breaker; fusible branches use F6xx kits. Same strap kit family serves Type S4 and Sentron SPP shallow panels.

Attribute	Value	Cl.	Sources
Status	current	A	S165 p.11-89; oem_spec
Main ampacity	Branch devices to 800A (MG1) per strap kit table	A	S165 p.11-96; oem_spec
Seismic mounting	Seismic-rated box installation: (4) 1/2-13 Grade 5 bolts with narrow flat washers tightened to 60 lb-ft; or minimum (4) 3/8-16 Grade 5 bolts with wide flat washers tightened to 30 lb-ft (center hole in each mounting bracket end)	A	S296 single sheet; oem_spec
Trim installation	Trims attached with 1/4-20 washer-head thread-forming screws: 1-piece trims 1-1/4 in only; 4-piece trims 1-1/4 in on exterior edges; 32 in wide P4 trims with deep inner flanges (1.56 in) 2 in screws on interior edges; 32/38 in wide P5 trims with shallow inner flanges (0.60 in) 1 in screws; hinges 1/4-20 x 1/2 countersunk screws + 1/4-20 Belleville nuts; trim cover screws 50 in-lb	A	S362 single sheet; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), NEB / HEB, QR2 / QRH2 / HQR2 / HQR2H, Sentron VL (DG, FG, JG, LG, MG, NG)

Key documents: S165 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S296 12-B-1015-01 Rev. 03 P4 / P5 Series Panelboard Box Installation For Seismic-Rated Panelboards; S362 11-A-1078-01 Rev. 02 Trim & Hinge Installation Instructions (P4 / P5)

Also fits this family (entry printed elsewhere): DFFP1A, EBF1, SDG, SLM1, SNB, SEBPPVA1, BQDHT2, BQDHT3, HPLQR, BQDPLD, HPLG, ED2HPL, FD6PL1, JD6HPL, MN6PLD, HBLQR, BQDHBD, E2HBL, FD6HB1, JD6HBL, MN6BL, EX11

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00356	**SMBKL6**	P4/P5 main breaker kit for Sentron JD / LD frame (shallow P4)	Sentron JD, SJD, LD, SLD frame main breakers, 3-ph 4-w **A**	unknown
EDH-SIE-00357	**SMBKL6D**	P4/P5 main breaker kit for Sentron JD / LD frame (deep P5)	Sentron JD, SJD, LD, SLD frame main breakers, 3-ph 4-w **A**	unknown
EDH-SIE-00358	**SMBKLG**	P4/P5 main breaker kit for Sentron VL JG / LG frame (shallow P4)	VL JG and LG frame electronic-trip breakers as main, 3-ph 4-w **A**	unknown
EDH-SIE-00359	**SMBKLG1D**	P4/P5 main breaker kit for Sentron VL JG / LG frame (deep P5)	VL JG and LG frame electronic-trip breakers as main, 3-ph 4-w **A**	unknown
EDH-SIE-00360	**SMBKMG**	P4/P5 main breaker kit for Sentron VL MG frame (shallow P4)	VL MG frame breakers as main, 3-ph 4-w; separate cover plates for ther **A**	unknown
EDH-SIE-00361	**SMBKMG1D**	P4/P5 main breaker kit for Sentron VL MG frame (deep P5)	VL MG frame breakers as main, 3-ph 4-w; separate cover plates for ther **A**	unknown

EDH-SIE-00356 — SMBKL6

Siemens lineage · main-breaker-kit · **STATUS UNKNOWN**

P4/P5 main breaker kit for Sentron JD / LD frame (shallow P4)

OEM part number	SMBKL6	**A**	S291 pp. 1-3; oem_spec
Installation location	Main position: unit space top marked 15 in down from top (or bottom for bottom feed) of Z-rail; left feed shown, rotate 180 deg for right feed	**A**	same as above
Breaker compatibility	Sentron JD, SJD, LD, SLD frame main breakers, 3-ph 4-w	**A**	same as above
Mounting-hole pattern	P5: support barrier assembly via 0.228 in Z-rail holes 1.875 in down from top of unit space; phase connectors (short/medium/long) four 1/4-20 x 1-1/4 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker mounts via 0.312 holes into 0.228 holes; P4: breaker mounting bracket 1/4-20 x 1/2 through 0.438 in holes into threaded inserts on strap support barrier (item 8 brackets omitted in P4)	**A**	same as above
Torque values	Phase connector screws per rear-of-deadfront label	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-D-1019-01 Rev. 0: Power Panel Kit (P4, P5) SMBKL6 / SMBKL6D for Main Mounting Sentron JD & LD Frame Breakers	**A**	same as above
Cross-links	Families: P4, P5		

EDH-SIE-00357 — SMBKL6D

Siemens lineage · main-breaker-kit · **STATUS UNKNOWN**

P4/P5 main breaker kit for Sentron JD / LD frame (deep P5)

OEM part number	SMBKL6D	**A**	S291 pp. 1-3; oem_spec
Installation location	Main position: unit space top marked 15 in down from top (or bottom for bottom feed) of Z-rail; left feed shown, rotate 180 deg for right feed	**A**	same as above
Breaker compatibility	Sentron JD, SJD, LD, SLD frame main breakers, 3-ph 4-w	**A**	same as above
Mounting-hole pattern	P5: support barrier assembly via 0.228 in Z-rail holes 1.875 in down from top of unit space; phase connectors (short/medium/long) four 1/4-20 x 1-1/4 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker mounts via 0.312 holes into 0.228 holes; P4: breaker mounting bracket 1/4-20 x 1/2 through 0.438 in holes into threaded inserts on strap support barrier (item 8 brackets omitted in P4)	**A**	same as above
Torque values	Phase connector screws per rear-of-deadfront label	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-D-1019-01 Rev. 0: Power Panel Kit (P4, P5) SMBKL6 / SMBKL6D for Main Mounting Sentron JD & LD Frame Breakers	**A**	same as above
Cross-links	Families: P4, P5		

EDH-SIE-00358	SMBKLG	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

P4/P5 main breaker kit for Sentron VL JG / LG frame (shallow P4)

OEM part number	SMBKLG	A	S292 pp. 1-3; oem_spec
Breaker compatibility	VL JG and LG frame electronic-trip breakers as main, 3-ph 4-w	A	same as above
Dimensions	Uses 6-1/4 in unit space; main position 15 in from top (or bottom) of Z-rail	A	same as above
Mounting-hole pattern	Long connector two 0.228 in section-bus holes 1-1/4 in down; center connector four 1/4-20 x 1-1/4 screws at 2.5 in mark; short connector 0.228 holes 5.0 in down; breaker mount 0.228 in Z-rail hole 1-7/8 in down; breaker load contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; line end 1/4-20 x 3-3/4 into 0.228 in bracket holes	A	same as above
Torque values	5/16-18 hardware per deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-D-1022-01 Rev. 1: Power Panel Kit (P4, P5) SMBKLG, SMBKLG1D for Main Mounting Type VL JG, LG Frame Breakers	A	same as above
Cross-links	Families: P4, P5		

EDH-SIE-00359	SMBKLG1D	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

P4/P5 main breaker kit for Sentron VL JG / LG frame (deep P5)

OEM part number	SMBKLG1D	A	S292 pp. 1-3; oem_spec
Breaker compatibility	VL JG and LG frame electronic-trip breakers as main, 3-ph 4-w	A	same as above
Dimensions	Uses 6-1/4 in unit space; main position 15 in from top (or bottom) of Z-rail	A	same as above
Mounting-hole pattern	Long connector two 0.228 in section-bus holes 1-1/4 in down; center connector four 1/4-20 x 1-1/4 screws at 2.5 in mark; short connector 0.228 holes 5.0 in down; breaker mount 0.228 in Z-rail hole 1-7/8 in down; breaker load contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; line end 1/4-20 x 3-3/4 into 0.228 in bracket holes	A	same as above
Torque values	5/16-18 hardware per deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-D-1022-01 Rev. 1: Power Panel Kit (P4, P5) SMBKLG, SMBKLG1D for Main Mounting Type VL JG, LG Frame Breakers	A	same as above
Cross-links	Families: P4, P5		

EDH-SIE-00360	SMBKMG	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

P4/P5 main breaker kit for Sentron VL MG frame (shallow P4)

OEM part number	SMBKMG	A	S293 pp. 1-3; oem_spec
Breaker compatibility	VL MG frame breakers as main, 3-ph 4-w; separate cover plates for thermal-magnetic vs electronic breakers	A	same as above
Mounting-hole pattern	P5: support barrier 0.228 in Z-rail hole 1.875 in down; P4: 3.125 in down; phase straps four 1/4-20 x 1-1/4 thread-forming screws through 0.312 holes into 0.228 section-bus holes; breaker load contacts 3/8-16 x 1.25 machine screw + Belleville washer into 0.344 in holes at strap ends; line side 1/4-20 x 4-1/4 into 0.228 in holes in support barrier	A	same as above
Torque values	3/8-16 per deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-D-1020-01 Rev. 0: Power Panel Kit (P4, P5) SMBKMG, SMBKMG1D for Main Mounting Type VL MG Frame Breakers	A	same as above
Cross-links	Families: P4, P5		

EDH-SIE-00361	SMBKMG1D	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

P4/P5 main breaker kit for Sentron VL MG frame (deep P5)

OEM part number	SMBKMG1D	A	S293 pp. 1-3; oem_spec
Breaker compatibility	VL MG frame breakers as main, 3-ph 4-w; separate cover plates for thermal-magnetic vs electronic breakers	A	same as above
Mounting-hole pattern	P5: support barrier 0.228 in Z-rail hole 1.875 in down; P4: 3.125 in down; phase straps four 1/4-20 x 1-1/4 thread-forming screws through 0.312 holes into 0.228 section-bus holes; breaker load contacts 3/8-16 x 1.25 machine screw + Belleville washer into 0.344 in holes at strap ends; line side 1/4-20 x 4-1/4 into 0.228 in holes in support barrier	A	same as above
Torque values	3/8-16 per deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-D-1020-01 Rev. 0: Power Panel Kit (P4, P5) SMBKMG, SMBKMG1D for Main Mounting Type VL MG Frame Breakers	A	same as above
Cross-links	Families: P4, P5		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00362	**SMLK12**	P4/P5 400-1200 A main lug kit	—	unknown

EDH-SIE-00362	SMLK12	Siemens lineage	main-lug-kit	STATUS UNKNOWN

P4/P5 400-1200 A main lug kit

OEM part number	SMLK12	**A**	S294 p. 2; oem_spec
Current rating	400-1200 A	**A**	same as above
Wire range	Up to four 500 MCM cables max per phase	**A**	same as above
Mounting-hole pattern	Lug elevation 13.75 in from top (or bottom) of Z-rail aligning with 0.228 in section-bus holes; four 1/4-20 x 1-3/4 screws per lug through lug 4-hole pattern; 1.69 in minimum clearance between lug and section bus; lugs on end of section bus closest to neutral	**A**	same as above
Torque values	Per back of deadfront cover	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-D-1018-01 Rev. 0: Power Panel Kit (P4, P5) SMLK12 for Main Lug Mounting (400-1200A)	**A**	same as above
Cross-links	Families: P4, P5		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00157	**6QR2**	6QR2 connecting strap kit - QR (5.00in, twin)	QR [s1]; QR2, QR2H, HQR2, HQR2H [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-OTH-00061	**BEDSITE**	Aftermarket bus connection kit BEDSITE (seller cross-ref to SIE SE6)	mounts two ED4 frame breakers **C**	current aftermarket item; listing label 'SIEMENS Aftermarket
EDH-OTH-00063	**BFDSITE**	Aftermarket bus connection kit BFDSITE (seller cross-ref to SIE SF6)	mounts two FD6 frame breakers **C**	current aftermarket item; listing label 'SIEMENS Aftermarket
EDH-OTH-00064	**BJDSITE**	Aftermarket bus connection kit BJDSITE (seller cross-ref to SIE SJ1)	mounts one JD6 frame breaker **C**	current aftermarket item; listing label 'SIEMENS Aftermarket
EDH-OTH-00062	**BQJSITE**	Aftermarket bus connection kit BQJSITE (seller cross-ref to SIE SQJ)	mounts two QJ2 frame breakers **C**	current aftermarket item; listing label 'SIEMENS Aftermarket
EDH-OTH-00065	**BSEBP4**	Aftermarket bus connection kit BSEBP4 (seller cross-ref to SIE SEB)	mounts two NEB/HEB frame breakers **C**	current aftermarket item; listing label 'SIEMENS Aftermarket
EDH-SIE-00400	**F602**	P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 2.5 in & 5 in high twin units	Siemens Vacu-Break fusible switch units: 2.5 in units V7A2211, V7A3211 **A**	unknown
EDH-SIE-00401	**F657**	P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 7.5 in high twin units	Siemens Vacu-Break fusible switch units: 7.5 in units V7E2223, V7E2233 **A**	unknown
EDH-SIE-00402	**F671**	P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 7.5 in & 10 in high single units (10 in unit)	Siemens Vacu-Break fusible switch units: 10 in units V7E3204, V7E2604, **A**	unknown
EDH-SIE-00149	**MG1**	MG1 connecting strap kit - VL MG (8.75in, single)	VL MG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00175	**MG1D**	MG1D connecting strap kit - VL MG (8.75in, single)	VL MG [s1]; NM, HM, LM, SNM, SHM, SLM [s3] **A**	listed in SpeedFax 2021, 2005 price list
EDH-SIE-00125	**S3VA41T**	S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)	3VA41, xGB [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00151	**S3VA41TD**	S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)	3VA41, xGB [s1]; 3VA41 [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00129	**S3VA52T**	S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	3VA61; 3VA52, 3VA62 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00156	**S3VA52TD**	S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	3VA61; 3VA52, 3VA62 [s1]; 3VA61; 3VA52, 3VA62 [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00135	**S3VA53T**	S3VA53T connecting strap kit - 3VA53 (6.25in, single)	3VA53 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00161	**S3VA53TD**	S3VA53TD connecting strap kit - 3VA53 (6.25in, single)	3VA53 [s1]; 3VA53, 3VA63 [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00142	**S3VA54T**	S3VA54T connecting strap kit - 3VA54 (6.25in, single)	3VA54 [s1] **A**	listed in SpeedFax 2021

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00168	**S3VA54TD**	S3VA54TD connecting strap kit - 3VA54 (6.25in, single)	3VA54 [s1]; 3VA54, 3VA64 [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00136	**S3VA63T**	S3VA63T connecting strap kit - 3VA63 (6.25in, single)	3VA63 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00143	**S3VA64T**	S3VA64T connecting strap kit - 3VA64 (6.25in, single)	3VA64 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00124	**SBL**	SBL connecting strap kit - BL, BQD (3.75in, twin)	BL, BQD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00150	**SBLBD**	SBLBD connecting strap kit - BL, BQD (3.75in, twin)	BL, BQD [s1]; BQD [s2]; BL, BLH, HBL, BQD [s3] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00128	**SCE**	SCE connecting strap kit - CED (3.75in, twin)	CED [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00134	**SCF**	SCF connecting strap kit - Sentron CFD (5.00in, single)	Sentron CFD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00139	**SCJ**	SCJ connecting strap kit - Sentron CJD (8.75in, single)	Sentron CJD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00146	**SCL**	SCL connecting strap kit - Sentron CLD (8.75in, single)	Sentron CLD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00130	**SDGD**	SDGD connecting strap kit - VL DG (5.00in, twin)	VL DG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00127	**SE6**	SE6 connecting strap kit - ED (3.75in, twin)	ED [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00348	**SEB**	Switchboard/power panel branch kit for EB breakers, shallow (P4)	Siemens EB circuit breakers **A**	unknown
EDH-SIE-00349	**SEBD**	Switchboard/power panel branch kit for EB breakers, deep (P5 / switchboard)	Siemens EB circuit breakers **A**	unknown
EDH-SIE-00133	**SF6**	SF6 connecting strap kit - Sentron FD (5.00in, twin)	Sentron FD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00132	**SFG**	SFG connecting strap kit - VL FG (5.00in, twin)	VL FG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00158	**SFGD**	SFGD connecting strap kit - VL FG (5.00in, twin)	VL FG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00126	**SGB2**	SGB2 connecting strap kit - xGB2 (3.75in, twin)	xGB2 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00153	**SGB2D**	SGB2D connecting strap kit - xGB2 (3.75in, twin)	xGB2 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00138	**SJ1**	SJ1 connecting strap kit - Sentron JD (8.75in, single)	Sentron JD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00137	**SJG**	SJG connecting strap kit - VL JG (6.25in, single)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00164	**SJG1D**	SJG1D connecting strap kit - VL JG (6.25in, single)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00145	**SL6**	SL6 connecting strap kit - Sentron LD (8.75in, single)	Sentron LD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00144	**SLG**	SLG connecting strap kit - VL LG (6.25in, single)	VL LG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00170	**SLGD**	SLGD connecting strap kit - VL LG (6.25in, single)	VL LG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00176	**SLM1D**	SLM1D connecting strap kit - Sentron LMD (8.75in, single)	Sentron LMD [s1]; LMD [s2]; LMD6, HLMD6 [s3] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00353	**SNBD**	Switchboard/P4/P5 branch kit for GB breakers (deep)	Type GB (NGB, HGB, LGB); 3-ph 3/4-w **A**	unknown
EDH-SIE-00470	**SQJ**	QJ breaker branch mounting kit (shallow panelboards (shallow kit reference shown))	QJ (QJ2 family) **A**	unknown
EDH-SIE-00131	**SQR**	SQR connecting strap kit - QR (5.00in, twin)	QR [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00181	**SQRD**	SQRD connecting strap kit - QR (5.00in, twin)	QR [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00141	**SSCJ**	SSCJ connecting strap kit - Sentron SCJD (8.75in, single)	Sentron SCJD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00148	**SSCL**	SSCL connecting strap kit - Sentron SCLD (8.75in, single)	Sentron SCLD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00140	**SSJ1**	SSJ1 connecting strap kit - Sentron SJD (8.75in, single)	Sentron SJD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00147	**SSL6**	SSL6 connecting strap kit - Sentron SLD (8.75in, single)	Sentron SLD [s1] **A**	listed in SpeedFax 2021

EDH-SIE-00157	6QR2	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

6QR2 connecting strap kit - QR (5.00in, twin)

OEM part number	6QR2	**A**	S165, S273 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec

Alternate / superseded numbers	6QR2CAN	**A**	S166 alias; p.11-15; oem_spec
	6QR2CCAN [alias]	**A**	same as above
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	**A**	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	**A**	S165, S166 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
Installation location	Distribution switchboard sections (SB1, SB2, SB3) and Type P4 (shallow) / P5 (deep) power panelboards	**A**	S273 pp. 1-3; oem_spec
Breaker compatibility	QR [s1]; QR2, QR2H, HQR2, HQR2H [s2]	**A**	S165, S166 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H (breaker not included); 3-phase 3/4-wire only	**A**	S273 pp. 1-3; oem_spec
Current rating	225A max (table max-amp rating)	**A**	S165, S166 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S165, S166 p.11-110 | p.11-15; oem_spec
	Instructions; 2 A/C straps; 1 B strap; 1 strap-section bus hardware kit (screw length per card 11-B-1005-01 by number of bus laminations); 2 A/C link bars; 1 B link bar; 2 QR mounting brackets; 1 5 in QR cover plate; 2 card holders; 1 circuit ID card; 2 neutral lug assemblies (panelboard and switchboard types); 6 1/4-20 x 3/8 thread-forming screws; 12 1/4-20 x 5/8 thread-forming screws; 4 1/4-20 x 2-3/4 thread-forming screws	**A**	S273 pp. 1-3; oem_spec
Material	QR filler plates only: 6QR2FKCAN; copper QR kit 6QR2CCAN (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	S166 p.11-15; oem_spec
Dimensions	Unit height 5 / 5.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S165, S166 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
	Requires 5 in of unit space; link bars 1.50 in vertically between centers; C-phase strap holes 2.50 in below A/B strap screws	**A**	S273 pp. 1-3; oem_spec
Mounting-hole pattern	Straps on two 0.228 in holes in section bus 1-1/4 in down from top of 5.0 in unit space (B then A), C-phase two 0.228 in holes 2.50 in below; link bars via 0.281 in holes; breaker ON-side contacts 1/4-20 x 5/8 into 0.228 in holes at link bar ends; QR mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; breaker OFF-side 1/4-20 x 2-3/4 into 0.228 in bracket holes	**A**	same as above
Torque values	All 1/4-20 thread-forming screws 72 lb-in (or per deadfront label)	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1133-01 Rev. 00: Switchboard/Powerpanel Kit SQRD / 6QR2 / SQR Installation Instructions for Branch Mounting of 225A MAX QR Breakers	**A**	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S165, S166 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating		

EDH-OTH-00061	BEDSITE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BEDSITE (seller cross-ref to SIE SE6)

OEM part number	BEDSITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	SE6 [equivalent] (seller cross-reference: 'Replaces OEM SE6')	C	same as above
	ED64K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for S4, P4, SPP (10 in deep enclosures); mounts two ED4 frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two ED4 frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'SIEMENS Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM SE6 ('Replaces OEM SE6') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: P4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00063	BFDSITE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BFDSITE (seller cross-ref to SIE SF6)

OEM part number	BFDSITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	SF6 [equivalent] (seller cross-reference: 'Replaces OEM SF6')	C	same as above
	FD64K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for S4, P4, SPP (10 in deep); mounts two FD6 frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two FD6 frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'SIEMENS Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM SF6 ('Replaces OEM SF6') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: P4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00064	BJDSITE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BJDSITE (seller cross-ref to SIE SJ1)

OEM part number	BJDSITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	SJ1 [equivalent] (seller cross-reference: 'Replaces OEM SJ1')	C	same as above
	JD64K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for S4, P4, SPP (10 in deep); mounts one JD6 frame breaker (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one JD6 frame breaker (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'SIEMENS Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM SJ1 ('Replaces OEM SJ1') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: P4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00062	BQJSITE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BQJSITE (seller cross-ref to SIE SQJ)

OEM part number	BQJSITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	SQJ [equivalent] (seller cross-reference: 'Replaces OEM SQJ')	C	same as above
	QJ64K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for S4, P4, SPP (10 in deep); mounts two QJ2 frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two QJ2 frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'SIEMENS Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM SQJ ('Replaces OEM SQJ') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: P4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00065	BSEBP4	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BSEBP4 (seller cross-ref to SIE SEB)

OEM part number	BSEBP4 (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	SEB [equivalent] (seller cross-reference: 'Replaces OEM SEB')	C	same as above
	NEB64K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for S4, P4, SPP (10 in deep); mounts two NEB/HEB frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two NEB/HEB frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'SIEMENS Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM SEB ('Replaces OEM SEB') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: P4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-SIE-00400	F602	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 2.5 in & 5 in high twin units

OEM part number	F602	A	S389 single sheet drawing + BOM (image); oem_spec
Installation location	SPP/FPP/S4/F1/P4 panelboards (shallow box)	A	same as above
Breaker compatibility	Siemens Vacu-Break fusible switch units: 2.5 in units V7A2211, V7A3211; 5 in units V7B2211, V7B2212, V7B2222, V7B3211, V7B3212, V7B3222	A	same as above
Kit contents	Fusible switch (see catalog no.) x1; 1/4-20 x 3/8 SHWHSW 11-1553-02 x4; strap-bus hardware kit 11-B-2022-05; neutral lug assembly 12-B-2105-01; instruction sheet	A	same as above
Dimensions	0.312 in dia (4) holes, 0.375 in dia (3) holes; 1.250 / 2.500 / 3.750 / 5.000 in; 0.625 in; 17.000 in overall	A	same as above
Torque values	50 in-lb Al / 72 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1001-01 Rev. 3: CAT. NO. F602 Vacu-Break mounting F1 branch kit, 2.5 in & 5 in high twin units (drawing 11-B-2000-00 Rev 3 / BOM 11-B-2000-02 Rev 6) for SPP/FPP/S4/F1/P4 (shallow box)	A	same as above
Cross-links	Families: P4		
Open question	*Kit BOM item 1 is the fusible switch itself - confirm whether F-kits are sold with or without the switch*		

EDH-SIE-00401	F657	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 7.5 in high twin units

OEM part number	F657	A	S390 single sheet drawing + BOM (image); oem_spec
Installation location	SPP/FPP/S4/F1/P4 panelboards (shallow box)	A	same as above
Breaker compatibility	Siemens Vacu-Break fusible switch units: 7.5 in units V7E2223, V7E2233, V7E3223, V7E3233, V7E2611, V7E2612, V7E2622, V7E2633, V7E3611, V7E3612, V7E3622, V7E3623, V7E3633 (as legible)	A	same as above
Kit contents	Fusible switch (see catalog no.) x1; 1/4-20 x 3/8 SHWHSW 11-1553-02 x4; strap-bus hardware kit 11-B-2022-05; neutral lug assembly 12-B-2105-01 x2; instruction sheet	A	same as above
Dimensions	17.000 in overall	A	same as above
Torque values	50 in-lb Al / 72 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1002-01 Rev. 1: CAT. NO. F657 Vacu-Break mounting F1 branch kit, 7.5 in high twin units (drawing 11-B-2001-00 Rev 3 / BOM 11-B-2001-02 Rev 6) for SPP/FPP/S4/F1/P4 (shallow box)	A	same as above
Cross-links	Families: P4		
Open question	*Kit BOM item 1 is the fusible switch itself - confirm whether F-kits are sold with or without the switch*		

EDH-SIE-00402	F671	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 7.5 in & 10 in high single units (10 in unit)

OEM part number	F671	A	S391 single sheet drawing + BOM (image); oem_spec
Installation location	SPP/FPP/S4/F1/P4 panelboards (shallow box)	A	same as above
Breaker compatibility	Siemens Vacu-Break fusible switch units: 10 in units V7E3204, V7E2604, V7E3604	A	same as above
Kit contents	Fusible switch (see catalog no.) x1; 1/4-20 x 3/8 SHWHSW 11-1553-02 x4; strap-bus hardware kit 11-B-2022-05; neutral lug assembly 12-B-2105-05; instruction sheet	A	same as above
Dimensions	17.000 in overall	A	same as above
Torque values	50 in-lb Al / 72 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1004-01 Rev. 1: CAT. NO. F671 Vacu-Break mounting F1 branch kit, 7.5 in & 10 in high single units (10 in unit) (drawing 11-B-2002-00 Rev 2 / BOM 11-B-2002-04 Rev 7) for SPP/FPP/S4/F1/P4 (shallow box)	A	same as above
Cross-links	Families: P4		
Open question	*Kit BOM item 1 is the fusible switch itself - confirm whether F-kits are sold with or without the switch*		

EDH-SIE-00149	MG1	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

MG1 connecting strap kit - VL MG (8.75in, single)

OEM part number	MG1	A	S165, S277 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL MG branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
Breaker compatibility	VL MG [s1]	A	S165 p.11-96 (s1); oem_spec
	Sentron LMD and VL MG frame breakers	A	S277 p. 4; oem_spec
Current rating	800A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	Two types of branch neutral lug assemblies; breaker cover plates: rectangular cutout for thermal-magnetic (TMTU) breakers, 'T' cutout for electronic-trip (ETU) breakers	A	S277 p. 4; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1016-01 Rev. 3: Switchboard/Power Panel Kit MG1/MG1D/SLM1/SLM1D for Branch Mounting Sentron LMD and VL MG Frame Breakers	A	S277 p. 4; oem_spec
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00175	MG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

MG1D connecting strap kit - VL MG (8.75in, single)

OEM part number	MG1D	A	S165, S277, S589 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL MG branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S165, S167 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
	branch, single mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	same as above
Breaker compatibility	VL MG [s1]; NM, HM, LM, SNM, SHM, SLM [s3]	A	S165, S167 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
	Sentron LMD and VL MG frame breakers	A	S277 p. 4; oem_spec
	VL MG (max 600 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec

Current rating	800A max (table max-amp rating)	A	S165, S167 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
	600 A max	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S165, S167 p.11-110 | p.8-13; oem_spec
	Two types of branch neutral lug assemblies; breaker cover plates: rectangular cutout for thermal-magnetic (TMTU) breakers, 'T' cutout for electronic-trip (ETU) breakers	A	S277 p. 4; oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper straps	A	S167 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165, S167, S589 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1016-01 Rev. 3: Switchboard/Power Panel Kit MG1/MG1D/SLM1/SLM1D for Branch Mounting Sentron LMD and VL MG Frame Breakers	A	S277 p. 4; oem_spec
Status	listed in SpeedFax 2021, 2005 price list	A	S165, S167 oem_spec
Identification features	2005 list price $2938.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, Torque values		
Open question	*2005 list maps NM/HM/LM (VL 800A) to MG1D while SpeedFax maps VL MG to MG1D - confirm whether 'NM/HM/LM' are VL MG-frame trip variants*		

EDH-SIE-00125 S3VA41T Siemens branch-connector-kit LISTED IN SPEEDFAX 202

S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)

OEM part number	S3VA41T	A	S165, S279 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin mount, 3.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
Breaker compatibility	3VA41, xGB [s1] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	A	S165 p.11-96 (s1); oem_spec
	3VA41 (SEAB, MEAB, HEAB) or xGB (NGB, HGB, LGB); 1-ph 2/3-w or 3-ph 3/4-w	A	S279 pp. 1-4; oem_spec
Current rating	125A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	2 A/C-phase runbacks; 3 A/C-phase straps; 1 B-phase runback; 1 B-phase strap; 2 barrier support brackets; 1 top barrier; 1 3.75 in cover plate; 6 circuit ID cards; 6 card holders; 6 blank fillers; 1 'Standard Bus Hardware Kit' (18 fasteners in 3 lengths + instruction card; select 5); 2 #10-24 x 3/8 HHWS; 6 #10-24 x 5/8 SHCS; 4 1/4-20 x 3/8 HHWS; 5 1/4-20 x 5/8 HHWS; 2 #8-32 x 5/8 HHWS; 1 branch neutral connector (S3VA41TD only); 1 branch neutral terminal strip	A	S279 pp. 1-4; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	Requires 3.75 in of unit space	A	S279 pp. 1-4; oem_spec
Mounting-hole pattern	A/C runbacks on two 0.228 in holes in A/C bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets into 0.228 in Z-rail hole 1.88 in below top	A	same as above
Torque values	#8-32 screws 35 lb-in; 1/4-20 per label on rear of deadfront	A	same as above

OEM instruction document	Siemens instruction sheet 11-B-1057-01 Rev. 00: P4 and P5 Power Panel / Distribution Switchboard Kit S3VA41T / S3VA41TD for Branch Mounting of Type 3VA41 or xGB Breakers	**A**	same as above
Status	listed in SpeedFax 2021	**A**	S165 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Finish / plating, Material		

EDH-SIE-00151 S3VA41TD Siemens branch-connector-kit LISTED IN SPEEDFAX 202

S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)

OEM part number	S3VA41TD	**A**	S165, S279 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin mount, 3.75in unit height	**A**	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	**A**	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S166 p.11-5; oem_spec
Breaker compatibility	3VA41, xGB [s1]; 3VA41 [s2] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	**A**	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	3VA41 (SEAB, MEAB, HEAB) or xGB (NGB, HGB, LGB); 1-ph 2/3-w or 3-ph 3/4-w	**A**	S279 pp. 1-4; oem_spec
Current rating	125A max (table max-amp rating)	**A**	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S165 p.11-110; oem_spec
	2 A/C-phase runbacks; 3 A/C-phase straps; 1 B-phase runback; 1 B-phase strap; 2 barrier support brackets; 1 top barrier; 1 3.75 in cover plate; 6 circuit ID cards; 6 card holders; 6 blank fillers; 1 'Standard Bus Hardware Kit' (18 fasteners in 3 lengths + instruction card; select 5); 2 #10-24 x 3/8 HHWS; 6 #10-24 x 5/8 SHCS; 4 1/4-20 x 3/8 HHWS; 5 1/4-20 x 5/8 HHWS; 2 #8-32 x 5/8 HHWS; 1 branch neutral connector (S3VA41TD only); 1 branch neutral terminal strip	**A**	S279 pp. 1-4; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 3.75 in of unit space	**A**	S279 pp. 1-4; oem_spec
Mounting-hole pattern	A/C runbacks on two 0.228 in holes in A/C bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets into 0.228 in Z-rail hole 1.88 in below top	**A**	same as above
Torque values	#8-32 screws 35 lb-in; 1/4-20 per label on rear of deadfront	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1057-01 Rev. 00: P4 and P5 Power Panel / Distribution Switchboard Kit S3VA41T / S3VA41TD for Branch Mounting of Type 3VA41 or xGB Breakers	**A**	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S165, S166 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Finish / plating, Material		

EDH-SIE-00129 S3VA52T Siemens branch-connector-kit LISTED IN SPEEDFAX 202

S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)

OEM part number	S3VA52T	**A**	S165, S281 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec

Alternate / superseded numbers	KS3VA52T / KS3VA52TD = panel-builder versions without nut keepers and provision filler plates	A	S281 equivalent; pp. 1-4; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA61; 3VA52, 3VA62 branch breaker(s), twin mount, 5.00in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
Breaker compatibility	3VA61; 3VA52, 3VA62 [s1]	A	S165 p.11-96 (s1); oem_spec
	250A MAX 3VA52 (MFAS, HFAS, CFAS), 150A MAX 3VA61 (MDAE, HDAE, CDAE, LDAE), 250A MAX 3VA62 (MFAE, HFAE, CFAE, LFAE); 1-ph only with 3VA52; twin mount	A	S281 pp. 1-4; oem_spec
Current rating	150/250A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	see note (SB table footnote c: includes qty 1 kit S3VA52PR; SpeedFax: 'Parts are included with kit S3VA52T(D)')	A	S166 oem_spec
	1 B-phase strap; 2 A/C-phase strap 1; 2 A/C-phase strap 2; 1 top barrier; 2 breaker mounting brackets; 1 5 in cover plate; 8 1/4-20 x 7/16 SHWHSW (72 lb-in); 1/4-20 x 1/2 SHWHSW (deep kits); 1 strap-section bus hardware kit (instruction sheet 11-B-1009-01); 2 card holders; 2 circuit ID cards; 1-ph top barrier mounting bracket kit (deep); 2 panelboard branch neutral lug assys; 2 switchboard branch neutral lug assys (deep); 2 breaker provision kits (bus extensions, nut keepers, 5/16-18 x 3/4 SHCS, #8-32 mounting screws); 2 provision filler assemblies; 2 provision B-phase barriers	A	S281 pp. 1-4; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	Requires 5 in of unit space; top barrier supports offset 1.25 in from unit-space centerline	A	S281 pp. 1-4; oem_spec
Torque values	Strap-section bus hardware 50 lb-in Al bus / 72 lb-in Cu bus; 1/4-20 SHWHSW 72 lb-in; bus extension to strap 5/16-18 (RP1 label value 177 lb-in for 3VA52/61/62 extensions)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1168-01 Rev. 02: Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA52T / S3VA52TD Installation Instructions for Type 3VA52/61/62 Breaker	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Replacement / successor	Panels with factory-installed provisions made before April 2021 lack bus extensions: add kit S3VA52PR (one per breaker). Nut keepers: 3VA9233-0QA00 (3VA52, kit of 3) or 3VA9243-0QA00 (3VA61/62, kit of 3)	A	S281 pp. 1-4; oem_spec
Cross-links	Families: P4, P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00156	**S3VA52TD**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)

OEM part number	S3VA52TD	A	S165, S281 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Alternate / superseded numbers	KS3VA52T / KS3VA52TD = panel-builder versions without nut keepers and provision filler plates	A	S281 equivalent; pp. 1-4; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA61; 3VA52, 3VA62 branch breaker(s), twin mount, 5.00in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec

Breaker compatibility	3VA61; 3VA52, 3VA62 [s1]; 3VA61; 3VA52, 3VA62 [s2]	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	250A MAX 3VA52 (MFAS, HFAS, CFAS), 150A MAX 3VA61 (MDAE, HDAE, CDAE, LDAE), 250A MAX 3VA62 (MFAE, HFAE, CFAE, LFAE); 1-ph only with 3VA52; twin mount	A	S281 pp. 1-4; oem_spec
Current rating	150/250A max (table max-amp rating)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote c: includes qty 1 kit S3VA52PR; SpeedFax: 'Parts are included with kit S3VA52T(D)')	A	S165 p.11-110; oem_spec
	1 B-phase strap; 2 A/C-phase strap 1; 2 A/C-phase strap 2; 1 top barrier; 2 breaker mounting brackets; 1 5 in cover plate; 8 1/4-20 x 7/16 SHWHSW (72 lb-in); 1/4-20 x 1/2 SHWHSW (deep kits); 1 strap-section bus hardware kit (instruction sheet 11-B-1009-01); 2 card holders; 2 circuit ID cards; 1-ph top barrier mounting bracket kit (deep); 2 panelboard branch neutral lug assys; 2 switchboard branch neutral lug assys (deep); 2 breaker provision kits (bus extensions, nut keepers, 5/16-18 x 3/4 SHCS, #8-32 mounting screws); 2 provision filler assemblies; 2 provision B-phase barriers	A	S281 pp. 1-4; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 5 in of unit space; top barrier supports offset 1.25 in from unit-space centerline	A	S281 pp. 1-4; oem_spec
Torque values	Strap-section bus hardware 50 lb-in Al bus / 72 lb-in Cu bus; 1/4-20 SHWHSW 72 lb-in; bus extension to strap 5/16-18 (RP1 label value 177 lb-in for 3VA52/61/62 extensions)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1168-01 Rev. 02: Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA52T / S3VA52TD Installation Instructions for Type 3VA52/61/62 Breaker	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Replacement / successor	Panels with factory-installed provisions made before April 2021 lack bus extensions: add kit S3VA52PR (one per breaker). Nut keepers: 3VA9233-0QA00 (3VA52, kit of 3) or 3VA9243-0QA00 (3VA61/62, kit of 3)	A	S281 pp. 1-4; oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00135	**S3VA53T**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA53T connecting strap kit - 3VA53 (6.25in, single)

OEM part number	S3VA53T	A	S165, S282 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Alternate / superseded numbers	KS3VA53T / KS3VA53TD panel-builder versions (no nut keepers / provision filler)	A	S282 equivalent; pp. 1-4; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53 branch breaker(s), single mount, 6.25in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
Breaker compatibility	3VA53 [s1]	A	S165 p.11-96 (s1); oem_spec
	400A MAX 3VA53 (MJAS, HJAS, CJAS) or 3VA63 (MJAE, HJAE, CJAE, LJAE); 3-ph 3/4-w	A	S282 pp. 1-4; oem_spec
Current rating	400A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	B-phase strap; A/C-phase strap short; A/C-phase strap long; long strap barrier; breaker mounting bracket; cover plate; 4 1/4-20 x 7/16 SHWHSW; 2 1/4-20 x 1/2 SHWHSW; strap-section bus hardware kit; card holder; circuit ID card; 3 plastic tree rivets; 2 panelboard branch neutral lug assys; 2 switchboard branch neutral lug assys (deep); breaker provision kit; provision filler plate assembly; provision phase barrier assembly	A	S282 pp. 1-4; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	Requires 6.25 in of unit space (figure: 1.25 in, 2.50 in, 3.13 in strap offsets)	A	S282 pp. 1-4; oem_spec

Torque values	1/4-20 SHWHSW 72 lb-in; strap-section bus hardware 50 lb-in Al / 72 lb-in Cu; bus extension 3/8-16 SHCS (RP1 label: 3VA53/63 nutkeeper 354 lb-in)	A	same as above
OEM instruction document	Siemens instruction sheet 15-A-1078-01 Rev. 00: Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA53T / S3VA53TD for Single-Mount 3VA53 / 3VA63 Breaker	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Replacement / successor	Missing bus extensions on factory provisions: kit S3VA53PR; nut keepers 3VA9473-0QA00 (kit of 3) or factory-installed by '2' as 12th character of breaker order no.	A	S282 pp. 1-4; oem_spec
Identification features	In P4 applications the B-phase set of straps MUST be taped together	A	same as above
Cross-links	Families: P4, P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00161	S3VA53TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA53TD connecting strap kit - 3VA53 (6.25in, single)

OEM part number	S3VA53TD	A	S165, S282 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Alternate / superseded numbers	KS3VA53T / KS3VA53TD panel-builder versions (no nut keepers / provision filler)	A	S282 equivalent; pp. 1-4; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53 branch breaker(s), single mount, 6.25in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
Breaker compatibility	3VA53 [s1]; 3VA53, 3VA63 [s2]	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	400A MAX 3VA53 (MJAS, HJAS, CJAS) or 3VA63 (MJAE, HJAE, CJAE, LJAE); 3-ph 3/4-w	A	S282 pp. 1-4; oem_spec
Current rating	400A max (table max-amp rating)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote d: includes qty 1 kit S3VA53PR)	A	S165 p.11-110; oem_spec
	B-phase strap; A/C-phase strap short; A/C-phase strap long; long strap barrier; breaker mounting bracket; cover plate; 4 1/4-20 x 7/16 SHWHSW; 2 1/4-20 x 1/2 SHWHSW; strap-section bus hardware kit; card holder; circuit ID card; 3 plastic tree rivets; 2 panelboard branch neutral lug assys; 2 switchboard branch neutral lug assys (deep); breaker provision kit; provision filler plate assembly; provision phase barrier assembly	A	S282 pp. 1-4; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 6.25 in of unit space (figure: 1.25 in, 2.50 in, 3.13 in strap offsets)	A	S282 pp. 1-4; oem_spec
Torque values	1/4-20 SHWHSW 72 lb-in; strap-section bus hardware 50 lb-in Al / 72 lb-in Cu; bus extension 3/8-16 SHCS (RP1 label: 3VA53/63 nutkeeper 354 lb-in)	A	same as above
OEM instruction document	Siemens instruction sheet 15-A-1078-01 Rev. 00: Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA53T / S3VA53TD for Single-Mount 3VA53 / 3VA63 Breaker	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Replacement / successor	Missing bus extensions on factory provisions: kit S3VA53PR; nut keepers 3VA9473-0QA00 (kit of 3) or factory-installed by '2' as 12th character of breaker order no.	A	S282 pp. 1-4; oem_spec
Identification features	In P4 applications the B-phase set of straps MUST be taped together	A	same as above
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00142	S3VA54T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA54T connecting strap kit - 3VA54 (6.25in, single)

OEM part number	S3VA54T	A	S165, S283 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Alternate / superseded numbers	KS3VA54T / KS3VA54TD panel-builder versions	A	S283 equivalent; pp. 1-4; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54 branch breaker(s), single mount, 6.25in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
Breaker compatibility	3VA54 [s1]	A	S165 p.11-96 (s1); oem_spec
	600A MAX 3VA54 (MLAS, HLAS, CLAS) or 3VA64 (MLAE, HLAE, CLAE, LLAE); 3-ph 3/4-w	A	S283 pp. 1-4; oem_spec
Current rating	600A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	A/C-phase straps short top/bottom; B-phase straps top/bottom; A/C-phase straps long top/bottom; long strap barrier; breaker mounting bracket; cover plate; 4 1/4-20 x 7/16 SHWHSW; 2 1/4-20 x 1/2 SHWHSW; strap-section bus hardware kit; card holder; circuit ID card; 3 plastic tree rivets; 2 panelboard + 2 switchboard (deep) branch neutral lug assys; breaker provision kit; provision filler plate assembly; phase barrier assembly	A	S283 pp. 1-4; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	Requires 6.25 in of unit space; double-lamination strap sets	A	S283 pp. 1-4; oem_spec
Torque values	1/4-20 SHWHSW 72 lb-in; bus hardware 50 lb-in Al / 72 lb-in Cu	A	same as above
OEM instruction document	Siemens instruction sheet 15-A-1079-01 Rev. 00: Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA54T / S3VA54TD for Single-Mount 3VA54 / 3VA64 Breaker	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Replacement / successor	S3VA53PR provision kit if bus extensions missing; nut keepers 3VA9473-0QA00	A	S283 pp. 1-4; oem_spec
Cross-links	Families: P4, P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00168	S3VA54TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA54TD connecting strap kit - 3VA54 (6.25in, single)

OEM part number	S3VA54TD	A	S165, S283 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Alternate / superseded numbers	KS3VA54T / KS3VA54TD panel-builder versions	A	S283 equivalent; pp. 1-4; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54 branch breaker(s), single mount, 6.25in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec

Breaker compatibility	3VA54 [s1]; 3VA54, 3VA64 [s2]	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	600A MAX 3VA54 (MLAS, HLAS, CLAS) or 3VA64 (MLAE, HLAE, CLAE, LLAE); 3-ph 3/4-w	A	S283 pp. 1-4; oem_spec
Current rating	600A max (table max-amp rating)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote d: includes qty 1 kit S3VA53PR)	A	S165 p.11-110; oem_spec
	A/C-phase straps short top/bottom; B-phase straps top/bottom; A/C-phase straps long top/bottom; long strap barrier; breaker mounting bracket; cover plate; 4 1/4-20 x 7/16 SHWHSW; 2 1/4-20 x 1/2 SHWHSW; strap-section bus hardware kit; card holder; circuit ID card; 3 plastic tree rivets; 2 panelboard + 2 switchboard (deep) branch neutral lug assys; breaker provision kit; provision filler plate assembly; phase barrier assembly	A	S283 pp. 1-4; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 6.25 in of unit space; double-lamination strap sets	A	S283 pp. 1-4; oem_spec
Torque values	1/4-20 SHWHSW 72 lb-in; bus hardware 50 lb-in Al / 72 lb-in Cu	A	same as above
OEM instruction document	Siemens instruction sheet 15-A-1079-01 Rev. 00: Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA54T / S3VA54TD for Single-Mount 3VA54 / 3VA64 Breaker	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Replacement / successor	S3VA53PR provision kit if bus extensions missing; nut keepers 3VA9473-0QA00	A	S283 pp. 1-4; oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00136	**S3VA63T**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA63T connecting strap kit - 3VA63 (6.25in, single)

OEM part number	S3VA63T	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA63 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
Breaker compatibility	3VA63 [s1]	A	S165 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00143	S3VA64T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA64T connecting strap kit - 3VA64 (6.25in, single)

OEM part number	S3VA64T	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA64 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
Breaker compatibility	3VA64 [s1]	A	S165 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00124	SBL	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SBL connecting strap kit - BL, BQD (3.75in, twin)

OEM part number	SBL	A	S165, S363 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for BL, BQD branch breaker(s), twin mount, 3.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
Breaker compatibility	BL, BQD [s1]	A	S165 p.11-96 (s1); oem_spec
	Siemens BL / BQD (BQDH) breakers; 3-ph 3-w or 4-w	A	S363 pp. 2-4 (image); oem_spec
Current rating	100A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	1 BL/BQDH breaker installation instruction; 2 BL-BQD A/C straps; 1 BL-BQD B-phase strap; 1 top barrier; 2 barrier supports; 2 A/C branch connectors; 1 breaker cover panel; 6 card holders; 1 circuit ID card; 1 strap-section bus hardware kit; 6 10-32 hex washer head screws; 2 10-24 x 3/8 SHWHSW; 6 1/4-20 x 3/8 SHWHSW; 1 neutral lug assembly; 5 EQ filler plates; box; carton label	A	S363 pp. 2-4 (image); oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	Requires 3-3/4 in of unit space (strap spacing 1.25 in, B-phase offset 3-5/8 in)	A	S363 pp. 2-4 (image); oem_spec
Mounting-hole pattern	A/C straps: two 1/4-20 thread-forming screws through two 0.281 in strap holes into two 0.228 in holes in A bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; top barrier 1/4-20 x 3/8 through 0.25 in holes into 0.228 holes; branch connectors 10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker 10-24 x 3/32 (sic) screw into 0.20 in hole in breaker metal contact	A	same as above
Torque values	All hardware per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1013-01 Rev. 0: Switchboard/Powerpanel Kit SBLBD/SBL for Branch Mounting Type BL/BQDH Breakers (scanned; read visually)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BBLITE ('Kit # SBL; six-pole BL frame, S4/P4/SPP'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor

Cross-links	Families: P4, P5, SB · Breakers: BL, BQD		
Not yet documented	Finish / plating, Material		
Open question	*Distributor listings for SBL disagree (one calls it a padlock kit / QR frame); SpeedFax p.11-96 shows BL/BQD 100A twin 3.75in - physical verification advised*		

EDH-SIE-00150	**SBLBD**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SBLBD connecting strap kit - BL, BQD (3.75in, twin)

OEM part number	SBLBD	A	S165, S363, S589 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for BL, BQD branch breaker(s), twin mount, 3.75in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	branch, twin mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	BL, BQD [s1]; BQD [s2]; BL, BLH, HBL, BQD [s3]	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	Siemens BL / BQD (BQDH) breakers; 3-ph 3-w or 4-w	A	S363 pp. 2-4 (image); oem_spec
	General BL, BQD (max 100 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	100A max (table max-amp rating)	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	100 A max	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S165, S167 p.11-110 | p.8-13; oem_spec
	1 BL/BQDH breaker installation instruction; 2 BL-BQD A/C straps; 1 BL-BQD B-phase strap; 1 top barrier; 2 barrier supports; 2 A/C branch connectors; 1 breaker cover panel; 6 card holders; 1 circuit ID card; 1 strap-section bus hardware kit; 6 10-32 hex washer head screws; 2 10-24 x 3/8 SHWHSW; 6 1/4-20 x 3/8 SHWHSW; 1 neutral lug assembly; 5 EQ filler plates; box; carton label	A	S363 pp. 2-4 (image); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper straps	A	S167 p.8-13; oem_spec

Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166, S167, S589 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	Requires 3-3/4 in of unit space (strap spacing 1.25 in, B-phase offset 3-5/8 in)	A	S363 pp. 2-4 (image); oem_spec
Mounting-hole pattern	A/C straps: two 1/4-20 thread-forming screws through two 0.281 in strap holes into two 0.228 in holes in A bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; top barrier 1/4-20 x 3/8 through 0.25 in holes into 0.228 holes; branch connectors 10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker 10-24 x 3/32 (sic) screw into 0.20 in hole in breaker metal contact	A	same as above
Torque values	All hardware per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1013-01 Rev. 0: Switchboard/Powerpanel Kit SBLBD/SBL for Branch Mounting Type BL/BQDH Breakers (scanned; read visually)	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S165, S166, S167 oem_spec
Identification features	2005 list price $768.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: BL, BQD, BQD / CQD (incl. BQD6, CQD6)		
Not yet documented	Finish / plating		

EDH-SIE-00128	SCE	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCE connecting strap kit - CED (3.75in, twin)

OEM part number	SCE	A	S165, S369 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	For use with CED6 frame breakers mounted in SPP/FPP/S4/F1/P4 panelboards (shallow box / shallow depth)	A	S369 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	CED [s1]	A	S165 p.11-96 (s1); oem_spec
	CED6 frame (I-T-E type breakers CLE, CED6)	A	S369 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	125A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	BOM 15-B-2012-05: E2-4-6 Ph A&C branch bus 15-B-4005-02 x2; E2-4-6 Ph B branch bus 15-B-4006-02 x1; E2-4-6 line connector 11-7138-01 x3; interphase barrier 15-7505-01 x2; E2-4-6 mounting bracket 15-B-3016-01 x2; 3.75 in E2-4-6 cover plate 12-6024-01 x1; circuit ID card 11-7505-01; card holder 11-7506-01; 1/4-20 x 3/8 SHWHSW 11-1553-02 x8; strap-bus hardware kit 11-B-2022-05 x1; 10-24 x 5/8 ISHDWHSW 11-1576-07 x12; 8-32 x 4-3/16 SRHSW 11-1510-15 x4; neutral lug assembly 12-B-2105-01 x1; blank filler 12-5531-09 x2; instruction sheet 31-1200-01	A	S369 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	Location dims B/M -01/-03: A 3.750, B 0.625, C 1.250 in; -02/-04: A 6.250, B 1.875, C 2.500 in	A	S369 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware: 50 in-lb Al / 72 in-lb Cu; 10-24 screws: 30 in-lb Al / 50 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1200-01 Rev. 1: CAT. NO. SCE - CED6 breaker mounting, S4 copper branch bus (drawing 15-B-2012-00 / BOM 15-B-2012-05 Rev 4)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		

Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00134	SCF	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCF connecting strap kit - Sentron CFD (5.00in, single)

OEM part number	SCF	A	S165, S371 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CFD branch breaker(s), single mount, 5.00in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	For use with CFD6 frame breakers mounted in SPP/FPP/S4/F1/P4 panelboards (shallow box / shallow depth); branch unit shown, reverse breaker for main feed	A	S371 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron CFD [s1]	A	S165 p.11-96 (s1); oem_spec
	I-T-E type breakers CLF, CFD6, 70-225 A	A	S371 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	250A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	BOM 15-B-2016-03: phase A branch bus 12-B-4011-01; phase B 12-B-4012-01; phase C 12-B-4013-01; mounting bracket 15-B-3020-01; 5 in main cover plate 12-6029-01; circuit ID card 11-7505-01; card holder 11-7506-01; 1/4-20 x 3/8 SHWHSW 11-1553-02 x4; 1/4-20 x 1 SHWHSW 11-1553-09 x3; 1/4-20 x 4 SRHMS 11-1542-19 x2; blank filler 12-5531-10; neutral lug assembly 12-B-2105-05; strap-bus hardware kit 11-B-2022-05	A	S371 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	5.000 in unit; 6.594 in to panel centerline; bus spacings 1.00 / 1.500 / 1.250 in	A	S371 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware 50 in-lb Al / 72 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1204-01 Rev. 1: CAT. NO. SCF - 225 A CLF breaker, S4 copper branch bus (drawing 15-B-2016-00 Rev 2 'CLF main/branch kit SPP (shallow)' / BOM 15-B-2016-03 Rev 5)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00139	SCJ	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCJ connecting strap kit - Sentron CJD (8.75in, single)

OEM part number	SCJ	A	S165, S372 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CJD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
	Use (1) 500 or (2) 250 kcmil terminal lugs on load side due to wire bending space	A	S372 single sheet drawing + BOM (scanned image, read visually); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec

	For use with CJD6 frame breakers mounted in SPP/FPP/S4/F1/P4 panelboards (shallow box / shallow depth)	A	S372 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron CJD [s1]	A	S165 p.11-96 (s1); oem_spec
	I.T.E. type breakers CJD6 (CLJ, CJD6)	A	S372 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	400A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	Phase branch bus A 12-B-4008-03, B 12-B-4008-04, C 12-B-4008-05; mounting bracket 15-B-3022-01; barrier clip 15-B-3007-02 x2; barrier clip 11-B-3007-01; load barriers 11-B-4501-01 and 11-B-4501-03; cover plate 12-6194-02; circuit ID card 11-7505-01; card holder 11-7506-01; 5/16-18 x 1-1/4 HHMS 11-1566-07 x3; 5/16 lock washer 11-1618-04 x3; strap-bus hardware kit 11-B-2023-05; 1/4-20 x 3/8 SHWHSW 11-1553-02 x14; 1/4-20 x 2-1/2 SRHMS 11-1542-13 x2; neutral lug assembly 12-B-2105-06	A	S372 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	8.75 in unit space; 7.50 in, 2.50 in, 5.00 in, 1.88 in, 0.63 in; bus spacing 3.63 in	A	S372 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Breaker to bus 5/16-18 HHMS (item 13) 12 ft-lb; strap-bus hardware (item 16) 72 in-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1208-01 Rev. 2: CAT. NO. SCJ - CJD6 (CLJ, CJD6) breaker mounting, S4 copper branch bus (drawing 12-B-2002-00 Rev 6 / BOM 12-B-2002-03 Rev 4)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00146	**SCL**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCL connecting strap kit - Sentron CLD (8.75in, single)

OEM part number	SCL	A	S165, S373 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CLD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	For use with CLD6 frame breakers mounted in SPP/FPP/S4/F1/P4 panelboards (shallow box / shallow depth)	A	S373 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron CLD [s1]	A	S165 p.11-96 (s1); oem_spec
	I.T.E. type breakers CLD6 (CLL, CLD)	A	S373 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	600A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	Phase branch bus A 12-B-4008-06, B 12-B-4008-07, C 12-B-4008-08; mounting bracket 15-B-3032-01; barrier clips 11-B-3007-03 x2 and 11-B-3007-04; load barriers 11-B-4501-01 and 11-B-4501-04; cover plate 12-6194-04; circuit ID card 11-7505-01; card holder 11-7506-01; 5/16-18 x 1-1/4 HHMS 11-1566-07 x3; 5/16 lock washer 11-1618-04 x3; strap-bus hardware kit 11-B-2023-05; 1/4-20 x 3/8 SHWHSW 11-1553-02 x14; 1/4-20 x 2-1/2 SRHMS 11-1542-13 x2; neutral lug assembly 12-B-2105-06	A	S373 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec

	8.75 in unit space; 7.50 in, 2.50 in, 5.00 in, 1.88 in, 0.63 in; bus spacing 3.63 in	A	S373 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Breaker to bus 5/16-18 HHMS (item 13) 12 ft-lb; strap-bus hardware (item 16) 72 in-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1212-01 Rev. 1: CAT. NO. SCL - CLD6 (CLL, CLD) breaker mounting, S4 copper branch bus (drawing 12-B-2006-00 Rev 7 / BOM 12-B-2006-03 Rev 7)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00130	**SDGD**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SDGD connecting strap kit - VL DG (5.00in, twin)

OEM part number	SDGD	A	S165, S274, S589 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL DG branch breaker(s), twin mount, 5.00in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-96 (s1) | p.11-110 (s1); oem_spec
	branch, twin mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5); 3-ph 3-w or 4-w	A	S274 pp. 1-4; oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	VL DG [s1]	A	S165 p.11-96 (s1) | p.11-110 (s1); oem_spec
	Siemens VL DG frame electronic-trip breakers	A	S274 pp. 1-4; oem_spec
	VL DG (max 150 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	150A max (table max-amp rating)	A	S165 p.11-96 (s1) | p.11-110 (s1); oem_spec
	150 A max	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1) | p.11-110 (s1); oem_spec
	Requires 5 in of unit space; A/C link bars 1.375 in vertically between centers	A	S274 pp. 1-4; oem_spec
	Unit height 5 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec

Mounting-hole pattern	B-phase strap into two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A and C straps into 0.228 in holes 1-1/4 in (A) / 3.75 in (C) down; B links (offset 0.281 holes) with 1/4-20 x 1-1/4 screws; breaker line contacts 10-24 socket head cap screws into 0.173 in holes of phase links; mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; load side two 8-32 screws into tapped bracket holes; barrier christmas-tree rivet 0.25 in hole into 0.156 in hole of B strap; provision barrier 10-24 SHCS through 0.228 hole into 0.173 hole of B link	A	S274 pp. 1-4; oem_spec
Torque values	Per label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1023-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel (P4, P5) Kit SDG, SDGD for Branch Mounting Type VL DG Frame Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		
Open question	*Same catalog number SDGD listed in both P4 (10in) and P5 (12.75in) tables - verify one kit serves both depths*		

EDH-SIE-00127	SE6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SE6 connecting strap kit - ED (3.75in, twin)

OEM part number	SE6	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for ED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
Breaker compatibility	ED [s1]	A	S165 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Aftermarket / reproduction	Breaker King offers BEDSITE (kit # ED64K) as a replacement ('Replaces OEM SE6'), labelled 'SIEMENS Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Cross-links	Families: P4 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00348	SEB	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

Switchboard/power panel branch kit for EB breakers, shallow (P4)

OEM part number	SEB	A	S272 pp. 1-3; oem_spec
Installation location	Switchboard or shallow/deep panelboard (P4/P5) branch, 3-ph 3-w or 3-ph 4-w	A	same as above
Breaker compatibility	Siemens EB circuit breakers	A	same as above
Dimensions	Requires 3-3/4 in of unit space	A	same as above
Mounting-hole pattern	A/C straps: two 0.281 in holes, fastened with 1/4-20 thread-forming screws into two 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C-phase strap 1-1/4 in down from A holes; B strap into 0.228 holes in B bus 1-1/4 in down; mounting brackets with 1/4-20 x 5/8 screws through 0.312 in hole into 0.228 in Z-rail hole 5/8 in below top of unit space; line connectors to breaker 10-24 x 5/8 into 0.203 in hole; barrier 1/4-20 x 3/8 through 0.25 in holes into 0.218 in holes of line connector	A	same as above
Torque values	All hardware per torque label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1020-01 Rev. 1: SEB / SEBD Installation Instructions - Siemens EB circuit breakers in switchboard or shallow/deep panelboards	A	same as above
Aftermarket / reproduction	Breaker King offers BSEBP4 (kit # NEB64K) as a replacement ('Replaces OEM SEB'), labelled 'SIEMENS Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Cross-links	Families: P4, P5, SB		

EDH-SIE-00349	SEBD	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

Switchboard/power panel branch kit for EB breakers, deep (P5 / switchboard)

OEM part number	SEBD	A	S272, S589 pp. 1-3; oem_spec
Application	branch, twin mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Switchboard or shallow/deep panelboard (P4/P5) branch, 3-ph 3-w or 3-ph 4-w	A	S272 pp. 1-3; oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	Siemens EB circuit breakers	A	S272 pp. 1-3; oem_spec
	General EB (max 100 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	100 A max	A	same as above
Kit contents	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	same as above
Dimensions	Requires 3-3/4 in of unit space	A	S272 pp. 1-3; oem_spec
	Unit height 3.75 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Mounting-hole pattern	A/C straps: two 0.281 in holes, fastened with 1/4-20 thread-forming screws into two 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C-phase strap 1-1/4 in down from A holes; B strap into 0.228 holes in B bus 1-1/4 in down; mounting brackets with 1/4-20 x 5/8 screws through 0.312 in hole into 0.228 in Z-rail hole 5/8 in below top of unit space; line connectors to breaker 10-24 x 5/8 into 0.203 in hole; barrier 1/4-20 x 3/8 through 0.25 in holes into 0.218 in holes of line connector	A	S272 pp. 1-3; oem_spec
Torque values	All hardware per torque label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1020-01 Rev. 1: SEB / SEBD Installation Instructions - Siemens EB circuit breakers in switchboard or shallow/deep panelboards	A	same as above
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Material, Status		

EDH-SIE-00133	SF6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SF6 connecting strap kit - Sentron FD (5.00in, twin)

OEM part number	SF6	A	S165, S370 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron FD branch breaker(s), twin mount, 5.00in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-96 (s1); oem_spec
	Provisions: fill blank space with items 15 & 25	A	S370 single sheet drawing + BOM (scanned image, read visually); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	For use with FXD6, FD6 and HFD6 frame breakers mounted in SPP/FPP/S4/F1/P4 panelboards (shallow box / shallow depth)	A	S370 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron FD [s1]	A	S165 p.11-96 (s1); oem_spec

	I-T-E type breakers FJ6, F6, HF6, FXD6, FD6, HFD6, 70-250 A, double mounting	A	S370 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	250A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	BOM 15-B-2014-03: F6 Ph A&C front branch bus 12-B-4002-02 x2; F6 Ph A&C rear branch bus 12-B-4003-02 x2; F6 Ph B branch bus 12-B-4004-02 x1; F6 mounting bracket 15-B-3018-01 x2; 5 in F6 cover plate 12-6028-01 x1; circuit ID card 11-7505-01 x2; card holder 11-7506-01 x2; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; strap-bus hardware kit 11-B-2023-05 x1; 1/4-20 x 1 SHWHSW 11-1553-09 x6; 1/4-20 x 4 SRHMS 11-1542-19 x4; blank filler 12-5531-10 x2; 10-24 x 5/8 RHSNB 11-1630-02 x4; 10-24 lock nut 11-1821-02 x4; neutral lug assembly 12-B-2105-05 x2; Ph B barrier (for provisions) 11-7548-02 x4	A	S370 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	5.00 in unit; location dims 3.75, 1.25, 0.63 in	A	S370 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware: 50 in-lb Al / 72 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1202-01 Rev. 3: CAT. NO. SF6 - F6 frame mounting S4 copper branch bus (drawing 15-B-2014-00 Rev 4 / BOM 15-B-2014-03 Rev 7)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Aftermarket / reproduction	Breaker King offers BFDSITE (kit # FD64K) as a replacement ('Replaces OEM SF6'), labelled 'SIEMENS Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Cross-links	Families: P4 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00132	**SFG**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SFG connecting strap kit - VL FG (5.00in, twin)

OEM part number	SFG	A	S165, S381 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL FG branch breaker(s), twin mount, 5.00in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5)	A	S381 pp. 1-4 (image); oem_spec
Breaker compatibility	VL FG [s1]	A	S165 p.11-96 (s1); oem_spec
	Siemens VL FG frame electronic-trip breakers; 3-ph 3-w or 4-w	A	S381 pp. 1-4 (image); oem_spec
Current rating	250A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	Instruction manual; 2 A/C bottom straps; 2 A/C top straps; 1 B phase strap; 2 A/C bottom links; 2 A/C top links; 1 B bottom link; 1 B top link; 1 barrier; 1 christmas tree rivet; 2 breaker mounting brackets; 1 strap-section bus hardware kit; 6 1/4-20 x 1-1/4 screws; 4 1/4-20 x 1/2 screws; 6 1/4-20 socket head cap screws; 6 1/4 washers; 1 card holder; 2 circuit ID cards; 3 8-32 x 1/4 screws; 1 5 in cover plate; 4 1/4-20 x 3/8 screws; 4 provision barriers; 2 neutral lug assemblies	A	S381 pp. 1-4 (image); oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	Requires 5 in of unit space; A/C link bars 1.375 in vertically between centers	A	S381 pp. 1-4 (image); oem_spec
Mounting-hole pattern	B strap two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A straps 1-1/4 in down, C straps 3.75 in down; B links via 0.281 in holes (offset, not symmetrical); mounting brackets 1/4-20 x 3/8 through 0.312 in hole into 0.228 Z-rail hole 5/8 in below A-strap screws; breaker line contacts 1/4-20 SHCS + washer into 0.228 in link holes; load side 8-32 screws into tapped bracket holes; barrier rivet 0.25 in into 0.156 in hole of B strap	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above

OEM instruction document	Siemens instruction sheet 11-B-1024-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SFG, SFGD for Branch Mounting Type VL FG Frame Breakers (scanned; read visually)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00158	**SFGD**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SFGD connecting strap kit - VL FG (5.00in, twin)

OEM part number	SFGD	A	S165, S381, S589 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL FG branch breaker(s), twin mount, 5.00in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-110 (s1); oem_spec
	branch, twin mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5)	A	S381 pp. 1-4 (image); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	VL FG [s1]	A	S165 p.11-110 (s1); oem_spec
	Siemens VL FG frame electronic-trip breakers; 3-ph 3-w or 4-w	A	S381 pp. 1-4 (image); oem_spec
	VL FG (max 225 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	250A max (table max-amp rating)	A	S165 p.11-110 (s1); oem_spec
	225 A max	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
	Instruction manual; 2 A/C bottom straps; 2 A/C top straps; 1 B phase strap; 2 A/C bottom links; 2 A/C top links; 1 B bottom link; 1 B top link; 1 barrier; 1 christmas tree rivet; 2 breaker mounting brackets; 1 strap-section bus hardware kit; 6 1/4-20 x 1-1/4 screws; 4 1/4-20 x 1/2 screws; 6 1/4-20 socket head cap screws; 6 1/4 washers; 1 card holder; 2 circuit ID cards; 3 8-32 x 1/4 screws; 1 5 in cover plate; 4 1/4-20 x 3/8 screws; 4 provision barriers; 2 neutral lug assemblies	A	S381 pp. 1-4 (image); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-110 (s1); oem_spec
	Requires 5 in of unit space; A/C link bars 1.375 in vertically between centers	A	S381 pp. 1-4 (image); oem_spec

	Unit height 5 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Mounting-hole pattern	B strap two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A straps 1-1/4 in down, C straps 3.75 in down; B links via 0.281 in holes (offset, not symmetrical); mounting brackets 1/4-20 x 3/8 through 0.312 in hole into 0.228 Z-rail hole 5/8 in below A-strap screws; breaker line contacts 1/4-20 SHCS + washer into 0.228 in link holes; load side 8-32 screws into tapped bracket holes; barrier rivet 0.25 in into 0.156 in hole of B strap	A	S381 pp. 1-4 (image); oem_spec
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1024-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SFG, SFGD for Branch Mounting Type VL FG Frame Breakers (scanned; read visually)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00126	**SGB2**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SGB2 connecting strap kit - xGB2 (3.75in, twin)

OEM part number	SGB2	A	S165, S278 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for xGB2 branch breaker(s), twin mount, 3.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
Breaker compatibility	xGB2 [s1]	A	S165 p.11-96 (s1); oem_spec
	NGB2, HGB2, LGB2 ONLY - do NOT use with NGB, LGB or HGB; 3-ph 3-w or 4-w only	A	S278 pp. 1-4; oem_spec
Current rating	125A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	2 A/C-phase runbacks; 2 A/C-phase straps; 1 B-phase runback; 1 B-phase strap; 2 GB2 barrier support brackets; 1 GB2 top barrier; 1 3-3/4 in cover plate; 6 circuit ID cards; 6 card holders; blank fillers; 1 bus hardware kit 1/8 in strap to section; 2 #10-24 x 3/8 HHWS; 6 #10-24 x 1/2 socket head cap screws; 4 1/4-20 x 3/8 HHWS; 1/4-20 x 5/8 HHWS; 2 #8-32 x 5/8 HHWS; branch neutral connector (SGB2D only); 1 branch neutral terminal strip. Runbacks/brackets shorter for SGB2, taller for SGB2D.	A	S278 pp. 1-4; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	Requires 3-3/4 in of unit space; 3.75 in cover plate	A	S278 pp. 1-4; oem_spec
Mounting-hole pattern	A/C runbacks on two 0.228 in holes in A (and C) bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets 1/4-20 x 3/8 into 0.228 in Z-rail holes 1.88 in below top of unit space	A	same as above
Torque values	#8-32 neutral strip screws 35 lb-in; 1/4-20 per label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1031-01 Rev. 00: Power Panel / Switchboard Kit SGB2 / SGB2D Instructions for Branch Mounting Type GB2 Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Material		

EDH-SIE-00153	**SGB2D**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SGB2D connecting strap kit - xGB2 (3.75in, twin)

OEM part number	SGB2D	A	S165, S278 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for xGB2 branch breaker(s), twin mount, 3.75in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-110 (s1); oem_spec
Breaker compatibility	xGB2 [s1]	A	same as above
	NGB2, HGB2, LGB2 ONLY - do NOT use with NGB, LGB or HGB; 3-ph 3-w or 4-w only	A	S278 pp. 1-4; oem_spec
Current rating	125A max (table max-amp rating)	A	S165 p.11-110 (s1); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
	2 A/C-phase runbacks; 2 A/C-phase straps; 1 B-phase runback; 1 B-phase strap; 2 GB2 barrier support brackets; 1 GB2 top barrier; 1 3-3/4 in cover plate; 6 circuit ID cards; 6 card holders; blank fillers; 1 bus hardware kit 1/8 in strap to section; 2 #10-24 x 3/8 HHWS; 6 #10-24 x 1/2 socket head cap screws; 4 1/4-20 x 3/8 HHWS; 1/4-20 x 5/8 HHWS; 2 #8-32 x 5/8 HHWS; branch neutral connector (SGB2D only); 1 branch neutral terminal strip. Runbacks/brackets shorter for SGB2, taller for SGB2D.	A	S278 pp. 1-4; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-110 (s1); oem_spec
	Requires 3-3/4 in of unit space; 3.75 in cover plate	A	S278 pp. 1-4; oem_spec
Mounting-hole pattern	A/C runbacks on two 0.228 in holes in A (and C) bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets 1/4-20 x 3/8 into 0.228 in Z-rail holes 1.88 in below top of unit space	A	same as above
Torque values	#8-32 neutral strip screws 35 lb-in; 1/4-20 per label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1031-01 Rev. 00: Power Panel / Switchboard Kit SGB2 / SGB2D Instructions for Branch Mounting Type GB2 Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Material		

EDH-SIE-00138	SJ1	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ1 connecting strap kit - Sentron JD (8.75in, single)

OEM part number	SJ1	A	S165, S495 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
	Branch mounting kit for Siemens JD frame breakers in shallow panelboards; 8-3/4in unit space; 3-ph 3W/4W (document covers SJ1/SSJ1/SL6/SSL6)	A	S495 pp.1-4; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
	branch	A	S495 pp.1-4; oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	Assembly may be flipped for right-feed applications	A	S495 pp.1-4; oem_spec
Breaker compatibility	Sentron JD [s1]	A	S165 p.11-96 (s1); oem_spec
	JD frame	A	S495 pp.1-4; oem_spec

Current rating	400A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	1 breaker install instr.; 1 strap support barrier; 1 long, 1 medium, 1 short phase connector; 1 strap-section bus hardware kit; 1 breaker mounting bracket; 1 breaker cover panel; 1 card holder; 1 circuit ID card; 2 1/4-20x3/8 SHWHSW; 4 1/4-20x1/2 SHWHSW; 2 1/4-20x9/16 SHWHSW; 2 1/4-20x2-3/4 SRHMS thread-forming; 3 5/16-18x1-1/8 HWHSW SEMS; 2 neutral lug assembly; box; carton label	A	S495 pp.1-4; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	8-3/4in unit space; 3-1/8in	A	S495 pp.1-4; oem_spec
Mounting-hole pattern	Support barrier at 0.228 Z-rail holes 3-1/8in from top and bottom of 8-3/4in unit space (1/4-20x1/2); phase connectors four 1/4-20 thread-forming via 0.312 into 0.228 bus holes; bracket 1/4-20x9/16 through 0.438 holes into threaded inserts on support barrier; breaker line one 5/16-18x1-1/8 per contact; load two 1/4-20x2-3/4 thread-forming into 0.228 holes	A	same as above
Torque values	Per rear of deadfront label	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Aftermarket / reproduction	Breaker King offers BJDSITE (kit # JD64K) as a replacement ('Replaces OEM SJ1'), labelled 'SIEMENS Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Finish / plating, OEM instruction document, Material		

EDH-SIE-00137 SJG — Siemens — branch-connector-kit — LISTED IN SPEEDFAX 202

SJG connecting strap kit - VL JG (6.25in, single)

OEM part number	SJG	A	S165, S276 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), single mount, 6.25in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5); 3-ph 3-w/4-w	A	S276 pp. 1-4; oem_spec
Breaker compatibility	VL JG [s1]	A	S165 p.11-96 (s1); oem_spec
	Siemens VL JG and LG frame electronic-trip breakers	A	S276 pp. 1-4; oem_spec
Current rating	400A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
	Requires 6-1/4 in of unit space	A	S276 pp. 1-4; oem_spec
Mounting-hole pattern	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes	A	same as above
Torque values	5/16-18 hardware per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1025-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SJG, SJG1D, SLG, SLGD for Branch Mounting Type VL JG, LG Frame Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00164 SJG1D — Siemens — branch-connector-kit — LISTED IN SPEEDFAX 202

SJG1D connecting strap kit - VL JG (6.25in, single)

OEM part number	SJG1D	**A**	S165, S276, S589 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), single mount, 6.25in unit height	**A**	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	**A**	S165 p.11-110 (s1); oem_spec
	branch, single mounting	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5); 3-ph 3-w/4-w	**A**	S276 pp. 1-4; oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	VL JG [s1]	**A**	S165 p.11-110 (s1); oem_spec
	Siemens VL JG and LG frame electronic-trip breakers	**A**	S276 pp. 1-4; oem_spec
	VL JG (max 250 A)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	400A max (table max-amp rating)	**A**	S165 p.11-110 (s1); oem_spec
	250 A max	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S165 p.11-110; oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	**A**	S165, S589 p.11-110 (s1); oem_spec
	Requires 6-1/4 in of unit space	**A**	S276 pp. 1-4; oem_spec
Mounting-hole pattern	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes	**A**	same as above
Torque values	5/16-18 hardware per rear-of-deadfront label	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1025-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SJG, SJG1D, SLG, SLGD for Branch Mounting Type VL JG, LG Frame Breakers	**A**	same as above
Status	listed in SpeedFax 2021	**A**	S165 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00145	SL6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SL6 connecting strap kit - Sentron LD (8.75in, single)

OEM part number	SL6	A	S165, S495 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
	Branch mounting kit for Siemens LD frame breakers in shallow panelboards; 8-3/4in unit space; 3-ph 3W/4W (document covers SJ1/SSJ1/SL6/SSL6)	A	S495 pp.1-4; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
	branch	A	S495 pp.1-4; oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	Assembly may be flipped for right-feed applications	A	S495 pp.1-4; oem_spec
Breaker compatibility	Sentron LD [s1]	A	S165 p.11-96 (s1); oem_spec
	LD frame	A	S495 pp.1-4; oem_spec
Current rating	600A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	1 breaker install instr.; 1 strap support barrier; 1 long, 1 medium, 1 short phase connector; 1 strap-section bus hardware kit; 1 breaker mounting bracket; 1 breaker cover panel; 1 card holder; 1 circuit ID card; 2 1/4-20x3/8 SHWHSW; 4 1/4-20x1/2 SHWHSW; 2 1/4-20x9/16 SHWHSW; 2 1/4-20x2-3/4 SRHMS thread-forming; 3 5/16-18x1-1/8 HWHSW SEMS; 2 neutral lug assembly; box; carton label	A	S495 pp.1-4; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	8-3/4in unit space; 3-1/8in	A	S495 pp.1-4; oem_spec
Mounting-hole pattern	Support barrier at 0.228 Z-rail holes 3-1/8in from top and bottom of 8-3/4in unit space (1/4-20x1/2); phase connectors four 1/4-20 thread-forming via 0.312 into 0.228 bus holes; bracket 1/4-20x9/16 through 0.438 holes into threaded inserts on support barrier; breaker line one 5/16-18x1-1/8 per contact; load two 1/4-20x2-3/4 thread-forming into 0.228 holes	A	same as above
Torque values	Per rear of deadfront label	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BLDSITE ('Kit # SL6; one LD6 frame, S4/P4/SPP'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Finish / plating, OEM instruction document, Material		

EDH-SIE-00144 **SLG** Siemens branch-connector-kit **LISTED IN SPEEDFAX 202**

SLG connecting strap kit - VL LG (6.25in, single)

OEM part number	SLG	A	S165, S276 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL LG branch breaker(s), single mount, 6.25in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5); 3-ph 3-w/4-w	A	S276 pp. 1-4; oem_spec
Breaker compatibility	VL LG [s1]	A	S165 p.11-96 (s1); oem_spec
	Siemens VL JG and LG frame electronic-trip breakers	A	S276 pp. 1-4; oem_spec

Current rating	600A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
	Requires 6-1/4 in of unit space	A	S276 pp. 1-4; oem_spec
Mounting-hole pattern	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes	A	same as above
Torque values	5/16-18 hardware per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1025-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SJG, SJG1D, SLG, SLGD for Branch Mounting Type VL JG, LG Frame Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00170	**SLGD**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SLGD connecting strap kit - VL LG (6.25in, single)

OEM part number	SLGD	A	S165, S276, S589 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL LG branch breaker(s), single mount, 6.25in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-110 (s1); oem_spec
	branch, single mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5); 3-ph 3-w/4-w	A	S276 pp. 1-4; oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	VL LG [s1]	A	S165 p.11-110 (s1); oem_spec
	Siemens VL JG and LG frame electronic-trip breakers	A	S276 pp. 1-4; oem_spec
	VL LG (max 400 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	600A max (table max-amp rating)	A	S165 p.11-110 (s1); oem_spec
	400 A max	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S165, S589 p.11-110 (s1); oem_spec

	Requires 6-1/4 in of unit space	A	S276 pp. 1-4; oem_spec
Mounting-hole pattern	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes	A	same as above
Torque values	5/16-18 hardware per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1025-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SJG, SJG1D, SLG, SLGD for Branch Mounting Type VL JG, LG Frame Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00176	**SLM1D**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SLM1D connecting strap kit - Sentron LMD (8.75in, single)

OEM part number	SLM1D	A	S165, S277, S589 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LMD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	branch, single mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	Sentron LMD [s1]; LMD [s2]; LMD6, HLMD6 [s3]	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	Sentron LMD and VL MG frame breakers	A	S277 p. 4; oem_spec
	Sentron LMD (max 800 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	800A max (table max-amp rating)	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	800 A max	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S165, S167 p.11-110 | p.8-13; oem_spec
	Two types of branch neutral lug assemblies; breaker cover plates: rectangular cutout for thermal-magnetic (TMTU) breakers, 'T' cutout for electronic-trip (ETU) breakers	A	S277 p. 4; oem_spec

	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper straps	A	S167 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166, S167, S589 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1016-01 Rev. 3: Switchboard/Power Panel Kit MG1/MG1D/SLM1/SLM1D for Branch Mounting Sentron LMD and VL MG Frame Breakers	A	S277 p. 4; oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S165, S166, S167 oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BLMDITE ('Kit # SLM1D; one LMD6 frame, 12-3/4 in deep enclosures (labelled aftermarket, no 'replaces' text)'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Identification features	2005 list price $2938.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00353	SNBD	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

Switchboard/P4/P5 branch kit for GB breakers (deep)

OEM part number	SNBD	A	S284, S589 pp. 1-3; oem_spec
Application	branch, twin mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	same as above
Breaker compatibility	Type GB (NGB, HGB, LGB); 3-ph 3/4-w	A	S284 pp. 1-3; oem_spec
	General NGB (max 100 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	100 A max	A	same as above
Kit contents	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	same as above
Dimensions	Requires 3-3/4 in of unit space	A	S284 pp. 1-3; oem_spec
	Unit height 3.75 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Mounting-hole pattern	A/C straps: two 1/4-20 thread-forming screws through 0.281 in strap holes into 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 0.228 in holes 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; branch connectors #10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker line tabs #10-32 washer head screws	A	S284 pp. 1-3; oem_spec
Torque values	All hardware per label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1019-01 Rev. 01: Switchboard/Power Panel Kit SNBD/SNB for Branch Mounting Type GB Breakers	A	same as above
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Material, Status		

EDH-SIE-00470	SQJ	Siemens	branch-connector-kit	STATUS UNKNOWN

QJ breaker branch mounting kit (shallow panelboards (shallow kit reference shown))

OEM part number	SQJ	A	S492, S628 pp.1-4; oem_spec
Description	Branch mounting kit for Siemens QJ breakers in shallow panelboards (shallow kit reference shown); 5in unit space; 3-ph 3W or 4W (document covers SQJD/6QJ2/SQJ)	A	S492 pp.1-4; oem_spec
	Bus connection hardware for S4, P4, SPP (10 in deep); mounts two QJ2 frame breakers (inferred from aftermarket seller's description of its replacement)	C	S628 distributor
Application	branch	A	S492 pp.1-4; oem_spec
Installation location	Branch neutral lugs at bottom (or top) of Z-rails; two neutral lug assembly types supplied (panelboard vs switchboard)	A	same as above
Breaker compatibility	QJ (QJ2 family)	A	same as above
Kit contents	1 installation instructions; 2 A/C strap; 1 B strap; 1 strap-section bus hardware kit; 2 A/C link bar; 1 B link bar; 2 QJ mounting bracket; 1 5in QJ cover plate; 2 card holder; 1 circuit ID card; 2 neutral lug ass'y; 6 1/4-20x3/8 screw; 12 1/4-20x5/8 screw; 4 1/4-20x2-3/4 screw; box; carton label	A	same as above
Dimensions	5.00in unit space; 1.25, 2.50, 1.50in	A	same as above
Mounting-hole pattern	B strap 1-1/4in below top of 5.0in unit space, two 1/4-20 thread-forming into 0.228 holes; C strap 2.50in below A/B screws; QJ bracket at 0.228 Z-rail hole 5/8in below A-strap screws via 0.312 bracket holes; link bars 0.281 holes, 1.50in between centres; breaker line: 1/4-20x5/8 into each contact; load: two 1/4-20x2-3/4 thread-forming into bracket 0.228 holes	A	same as above
Torque values	Per label on rear of deadfront (not printed on sheet)	A	same as above
Aftermarket / reproduction	Breaker King offers BQJSITE (kit # QJ64K) as a replacement ('Replaces OEM SQJ'), labelled 'SIEMENS Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Cross-links	Families: P4 · Breakers: QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Material, Status		
Open question	*Sheet is common to SQJD/6QJ2/SQJ; the item list may differ per variant (shallow kit shown only as reference).*		

EDH-SIE-00131	SQR	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SQR connecting strap kit - QR (5.00in, twin)

OEM part number	SQR	A	S165, S273 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	Distribution switchboard sections (SB1, SB2, SB3) and Type P4 (shallow) / P5 (deep) power panelboards	A	S273 pp. 1-3; oem_spec
Breaker compatibility	QR [s1]	A	S165 p.11-96 (s1); oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H (breaker not included); 3-phase 3/4-wire only	A	S273 pp. 1-3; oem_spec
Current rating	225A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	Instructions; 2 A/C straps; 1 B strap; 1 strap-section bus hardware kit (screw length per card 11-B-1005-01 by number of bus laminations); 2 A/C link bars; 1 B link bar; 2 QR mounting brackets; 1 5 in QR cover plate; 2 card holders; 1 circuit ID card; 2 neutral lug assemblies (panelboard and switchboard types); 6 1/4-20 x 3/8 thread-forming screws; 12 1/4-20 x 5/8 thread-forming screws; 4 1/4-20 x 2-3/4 thread-forming screws	A	S273 pp. 1-3; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	Requires 5 in of unit space; link bars 1.50 in vertically between centers; C-phase strap holes 2.50 in below A/B strap screws	A	S273 pp. 1-3; oem_spec

Mounting-hole pattern	Straps on two 0.228 in holes in section bus 1-1/4 in down from top of 5.0 in unit space (B then A), C-phase two 0.228 in holes 2.50 in below; link bars via 0.281 in holes; breaker ON-side contacts 1/4-20 x 5/8 into 0.228 in holes at link bar ends; QR mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; breaker OFF-side 1/4-20 x 2-3/4 into 0.228 in bracket holes	**A**	same as above
Torque values	All 1/4-20 thread-forming screws 72 lb-in (or per deadfront label)	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1133-01 Rev. 00: Switchboard/Powerpanel Kit SQRD / 6QR2 / SQR Installation Instructions for Branch Mounting of 225A MAX QR Breakers	**A**	same as above
Status	listed in SpeedFax 2021	**A**	S165 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Material		

EDH-SIE-00181 **SQRD** Siemens branch-connector-kit **LISTED IN SIEMENS CANA**

SQRD connecting strap kit - QR (5.00in, twin)

OEM part number	SQRD	**A**	S166, S273 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	**A**	S166 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Twin	**A**	S166 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S166 p.11-5; oem_spec
	Distribution switchboard sections (SB1, SB2, SB3) and Type P4 (shallow) / P5 (deep) power panelboards	**A**	S273 pp. 1-3; oem_spec
Breaker compatibility	QR [s2]	**A**	S166 p.11-5 (s2); oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H (breaker not included); 3-phase 3/4-wire only	**A**	S273 pp. 1-3; oem_spec
Current rating	225A max (table max-amp rating)	**A**	S166 p.11-5 (s2); oem_spec
Kit contents	Instructions; 2 A/C straps; 1 B strap; 1 strap-section bus hardware kit (screw length per card 11-B-1005-01 by number of bus laminations); 2 A/C link bars; 1 B link bar; 2 QR mounting brackets; 1 5 in QR cover plate; 2 card holders; 1 circuit ID card; 2 neutral lug assemblies (panelboard and switchboard types); 6 1/4-20 x 3/8 thread-forming screws; 12 1/4-20 x 5/8 thread-forming screws; 4 1/4-20 x 2-3/4 thread-forming screws	**A**	S273 pp. 1-3; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S166 p.11-5 (s2); oem_spec
	Requires 5 in of unit space; link bars 1.50 in vertically between centers; C-phase strap holes 2.50 in below A/B strap screws	**A**	S273 pp. 1-3; oem_spec
Mounting-hole pattern	Straps on two 0.228 in holes in section bus 1-1/4 in down from top of 5.0 in unit space (B then A), C-phase two 0.228 in holes 2.50 in below; link bars via 0.281 in holes; breaker ON-side contacts 1/4-20 x 5/8 into 0.228 in holes at link bar ends; QR mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; breaker OFF-side 1/4-20 x 2-3/4 into 0.228 in bracket holes	**A**	same as above
Torque values	All 1/4-20 thread-forming screws 72 lb-in (or per deadfront label)	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1133-01 Rev. 00: Switchboard/Powerpanel Kit SQRD / 6QR2 / SQR Installation Instructions for Branch Mounting of 225A MAX QR Breakers	**A**	same as above
Status	listed in Siemens Canada catalogue 2025	**A**	S166 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Material		

EDH-SIE-00141 **SSCJ** Siemens branch-connector-kit **LISTED IN SPEEDFAX 202**

SSCJ connecting strap kit - Sentron SCJD (8.75in, single)

OEM part number	SSCJ	A	S165, S481 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCJD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
	Branch breaker mounting kit for ITE SCJD6 in SPP/FPP/S4/F1/P4 panelboards (shallow box), copper bus (merchandise kit SSCJ) (Drawing note: use (1) 500 or (2) 250 kcmil terminal lugs on load side of breaker due to wire bending space requirements)	A	S481 p.1 (drawing 12-B-2012-00, BOM 12-B-2012-03); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
	branch	A	S481 p.1 (drawing 12-B-2012-00, BOM 12-B-2012-03); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
Breaker compatibility	Sentron SCJD [s1]	A	S165 p.11-96 (s1); oem_spec
	SCJD6	A	S481 p.1 (drawing 12-B-2012-00, BOM 12-B-2012-03); oem_spec
Current rating	400A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	BOM 12-B-2012-03: A/B/C phase branch bus 12-B-4008-03/-04/-05; mounting bracket 15-B-3022-01; 2 barrier clip 11-B-3007-02; 2 barrier clip 11-B-3007-01; load barrier 11-B-4501-01; load barrier 11-B-4501-03; cover plate 12-6487-01; circuit ID card 11-7505-01; card holder 11-7506-01; 3 5/16-18x1-1/4 HHMS 11-1566-07; 3 5/16 lock washer 11-1618-04; 1 strap-bus hardware kit 11-B-2023-05; 14 1/4-20x3/8 SHWHSW 11-1553-02; 2 1/4-20x2-1/2 SRHMS 11-1542-13; neutral lug assembly 12-B-2105-06; instruction 31-1209-01; carton label 15-A-1027-01; carton 48001057	A	S481 p.1 (drawing 12-B-2012-00, BOM 12-B-2012-03); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	8.75in unit (1.88 / 5.00 / 1.88); 7.50, 2.50, 0.63, 7.06, 3.63, 4.31, 0.89in	A	S481 p.1 (drawing 12-B-2012-00, BOM 12-B-2012-03); oem_spec
Torque values	72 in-lb (strap-bus hardware); 12 ft-lb (5/16-18 HHMS)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SIE-00148 **SSCL** Siemens branch-connector-kit **LISTED IN SPEEDFAX 202**

SSCL connecting strap kit - Sentron SCLD (8.75in, single)

OEM part number	SSCL	A	S165, S374 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCLD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	For use with SCLD6 frame breakers mounted in SPP/FPP/S4/F1/P4 panelboards (shallow box / shallow depth)	A	S374 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron SCLD [s1]	A	S165 p.11-96 (s1); oem_spec

	I.T.E. type breakers SCLD6	A	S374 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	600A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	Phase branch bus A 12-B-4008-06, B 12-B-4008-07, C 12-B-4008-08; mounting bracket 15-B-3032-01; barrier clips 11-B-3007-03 x2 and 11-B-3007-04; load barriers 11-B-4501-01 and 11-B-4501-04; cover plate 12-6487-03; circuit ID card 11-7505-01; card holder 11-7506-01; 5/16-18 x 1-1/4 HHMS 11-1566-07 x3; 5/16 lock washer 11-1618-04 x3; strap-bus hardware kit 11-B-2023-05; 1/4-20 x 3/8 SHWHSW 11-1553-02 x14; 1/4-20 x 2-1/2 SRHMS 11-1542-13 x2; neutral lug assembly 12-B-2105-06	A	S374 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	8.75 in unit space; 7.50 in, 2.50 in, 5.00 in, 1.88 in, 0.63 in; bus spacing 3.63 in	A	S374 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Breaker to bus 5/16-18 HHMS (item 13) 12 ft-lb; strap-bus hardware (item 16) 72 in-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1213-01 Rev. 2: CAT. NO. SSCL - SCLD6 breaker mounting, S4 copper branch bus (drawing 12-B-2013-00 Rev 4 / BOM 12-B-2013-03 Rev 7)	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00140	**SSJ1**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSJ1 connecting strap kit - Sentron SJD (8.75in, single)

OEM part number	SSJ1	A	S165, S495 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SJD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
	Branch mounting kit for Siemens SJD frame breakers in shallow panelboards; 8-3/4in unit space; 3-ph 3W/4W (document covers SJ1/SSJ1/SL6/SSL6)	A	S495 pp.1-4; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
	branch	A	S495 pp.1-4; oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	Assembly may be flipped for right-feed applications	A	S495 pp.1-4; oem_spec
Breaker compatibility	Sentron SJD [s1]	A	S165 p.11-96 (s1); oem_spec
	SJD frame	A	S495 pp.1-4; oem_spec
Current rating	400A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	1 breaker install instr.; 1 strap support barrier; 1 long, 1 medium, 1 short phase connector; 1 strap-section bus hardware kit; 1 breaker mounting bracket; 1 breaker cover panel; 1 card holder; 1 circuit ID card; 2 1/4-20x3/8 SHWHSW; 4 1/4-20x1/2 SHWHSW; 2 1/4-20x9/16 SHWHSW; 2 1/4-20x2-3/4 SRHMS thread-forming; 3 5/16-18x1-1/8 HWHSW SEMS; 2 neutral lug assembly; box; carton label	A	S495 pp.1-4; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	8-3/4in unit space; 3-1/8in	A	S495 pp.1-4; oem_spec
Mounting-hole pattern	Support barrier at 0.228 Z-rail holes 3-1/8in from top and bottom of 8-3/4in unit space (1/4-20x1/2); phase connectors four 1/4-20 thread-forming via 0.312 into 0.228 bus holes; bracket 1/4-20x9/16 through 0.438 holes into threaded inserts on support barrier; breaker line one 5/16-18x1-1/8 per contact; load two 1/4-20x2-3/4 thread-forming into 0.228 holes	A	same as above
Torque values	Per rear of deadfront label	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec

Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Finish / plating, OEM instruction document, Material		

EDH-SIE-00147	SSL6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSL6 connecting strap kit - Sentron SLD (8.75in, single)

OEM part number	SSL6	A	S165, S495 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SLD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
	Branch mounting kit for Siemens SLD frame breakers in shallow panelboards; 8-3/4in unit space; 3-ph 3W/4W (document covers SJ1/SSJ1/SL6/SSL6)	A	S495 pp.1-4; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-96 (s1); oem_spec
	branch	A	S495 pp.1-4; oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S165 p.11-96; oem_spec
	Assembly may be flipped for right-feed applications	A	S495 pp.1-4; oem_spec
Breaker compatibility	Sentron SLD [s1]	A	S165 p.11-96 (s1); oem_spec
	SLD frame	A	S495 pp.1-4; oem_spec
Current rating	600A max (table max-amp rating)	A	S165 p.11-96 (s1); oem_spec
Kit contents	1 breaker install instr.; 1 strap support barrier; 1 long, 1 medium, 1 short phase connector; 1 strap-section bus hardware kit; 1 breaker mounting bracket; 1 breaker cover panel; 1 card holder; 1 circuit ID card; 2 1/4-20x3/8 SHWHSW; 4 1/4-20x1/2 SHWHSW; 2 1/4-20x9/16 SHWHSW; 2 1/4-20x2-3/4 SRHMS thread-forming; 3 5/16-18x1-1/8 HWHSW SEMS; 2 neutral lug assembly; box; carton label	A	S495 pp.1-4; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-96 (s1); oem_spec
	8-3/4in unit space; 3-1/8in	A	S495 pp.1-4; oem_spec
Mounting-hole pattern	Support barrier at 0.228 Z-rail holes 3-1/8in from top and bottom of 8-3/4in unit space (1/4-20x1/2); phase connectors four 1/4-20 thread-forming via 0.312 into 0.228 bus holes; bracket 1/4-20x9/16 through 0.438 holes into threaded inserts on support barrier; breaker line one 5/16-18x1-1/8 per contact; load two 1/4-20x2-3/4 thread-forming into 0.228 holes	A	same as above
Torque values	Per rear of deadfront label	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Finish / plating, OEM instruction document, Material		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00217	**SEBP4V1**	Service entrance barrier for (S)JD, (S)LD, MG mains	Horizontally-mounted JD, LD or MG main in P4 or P5 A	unknown
EDH-SIE-00218	**SEBP4V2**	Service entrance barrier for CJD, CLD	Horizontally-mounted CJD or CLD main in P4 or P5 A	unknown
EDH-SIE-00219	**SEBP4V3**	Service entrance barrier for JG, LG	Horizontally-mounted JG or LG main in P4 or P5 A	unknown

EDH-SIE-00217	SEBP4V1	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for (S)JD, (S)LD, MG mains

OEM part number	SEBP4V1	A	S165, S334 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)JD, (S)LD, MG mains	A	S165 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S334 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted JD, LD or MG main in P4 or P5	A	same as above
Kit contents	1 barrier support bracket; 2 1/4-20 x 1/2 SHWHSW; 1 barrier assembly; 2 #10-32 x 3/8 HWHSW	A	same as above
Torque values	1/4-20 to strap support barrier 20 lb-in; #10-32 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1158-01 Rev. 00: SEBP4V1 Service Entrance Barrier Kit for P4 or P5	A	same as above
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00218	SEBP4V2	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for CJD, CLD

OEM part number	SEBP4V2	A	S165, S335 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for CJD, CLD	A	S165 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S335 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted CJD or CLD main in P4 or P5	A	same as above
Kit contents	1 barrier support bracket; 2 #10-32 x 5/8 SHWHSW; 1 barrier assembly; 2 removable screw-type rivets; 1 P4 CLD support adaptor	A	same as above
Torque values	20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1159-01 Rev. 00: SEBP4V2 Service Entrance Barrier Kit for P4 or P5	A	same as above
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00219	SEBP4V3	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for JG, LG

OEM part number	SEBP4V3	A	S165, S336 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for JG, LG	A	S165 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S336 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted JG or LG main in P4 or P5	A	same as above
Kit contents	1 barrier support bracket; 2 #8-32 x 5/8 IHWHSW; 1 barrier assembly; 2 removable screw-type rivets	A	same as above
Torque values	20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1162-01 Rev. 00: SEBP4V3 Service Entrance Barrier Kit for P4 or P5	A	same as above
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00211	**6FPB01**	6FPB01 blank plate, 1.25in unit space	—	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00212	**6FPB02**	6FPB02 blank plate, 2.5in unit space	—	current
EDH-SIE-00213	**6FPB03**	6FPB03 blank plate, 3.75in unit space	—	current
EDH-SIE-00214	**6FPB05**	6FPB05 blank plate, 5in unit space	—	current
EDH-SIE-00215	**6FPB10**	6FPB10 blank plate, 10in unit space	—	current

EDH-SIE-00211	6FPB01	Siemens	filler-plate	CURRENT

6FPB01 blank plate, 1.25in unit space

OEM part number	6FPB01	A	S165, S589 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 1.25in unit height	A	S165, S166, S167 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
	Blank plate - circuit breaker & fusible switch	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S165, S166, S167 oem_spec
Installation location	SB1, SB2, SB3, FC20, FCI, FCII switchboards or Series 5 or 6 VB and CDP panelboards	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	1.25in unit height	A	S165, S166, S167 oem_spec
	Unit height 1.25 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Status	current	A	S165, S166 oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BFP1SE ('1X filler blank 1-1/4 in H x 19 in W for CDP6/S4/S5/P4/P5 (description lists 6FPB01 SFP01)'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Identification features	Series 6 blank plate; 2005 list price $154.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00212	6FPB02	Siemens	filler-plate	CURRENT

6FPB02 blank plate, 2.5in unit space

OEM part number	6FPB02	A	S165, S589 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 2.5in unit height	A	S165, S166, S167 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
	Blank plate - circuit breaker & fusible switch	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S165, S166, S167 oem_spec
Installation location	SB1, SB2, SB3, FC20, FCI, FCII switchboards or Series 5 or 6 VB and CDP panelboards	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	2.5in unit height	A	S165, S166, S167 oem_spec
	Unit height 2.5 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Status	current	A	S165, S166 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00213	6FPB03	Siemens	filler-plate	CURRENT

6FPB03 blank plate, 3.75in unit space

OEM part number	6FPB03	A	S165, S589 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 3.75in unit height	A	S165, S166, S167 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
	Blank plate - circuit breaker & fusible switch	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S165, S166, S167 oem_spec
Installation location	SB1, SB2, SB3, FC20, FCI, FCII switchboards or Series 5 or 6 VB and CDP panelboards	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	3.75in unit height	A	S165, S166, S167 oem_spec
	Unit height 3.75 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Status	current	A	S165, S166 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00214	6FPB05	Siemens	filler-plate	CURRENT

6FPB05 blank plate, 5in unit space

OEM part number	6FPB05	A	S165, S589 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 5in unit height	A	S165, S166, S167 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
	Blank plate - circuit breaker & fusible switch	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S165, S166, S167 oem_spec
Installation location	SB1, SB2, SB3, FC20, FCI, FCII switchboards or Series 5 or 6 VB and CDP panelboards	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	5in unit height	A	S165, S166, S167 oem_spec
	Unit height 5 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Status	current	A	S165, S166 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00215	6FPB10	Siemens	filler-plate	CURRENT

6FPB10 blank plate, 10in unit space

OEM part number	6FPB10	A	S165, S589 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 10in unit height	A	S165, S166, S167 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
	Blank plate - circuit breaker & fusible switch	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S165, S166, S167 oem_spec
Installation location	SB1, SB2, SB3, FC20, FCI, FCII switchboards or Series 5 or 6 VB and CDP panelboards	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	10in unit height	A	S165, S166, S167 oem_spec
	Unit height 10 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Status	current	A	S165, S166 oem_spec
Identification features	Series 6 blank plate; 2005 list price $239.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00205	**S3VA52PR**	3VA52/61/62 breaker provision hardware kit (twin mount)	—	current

EDH-SIE-00205 **S3VA52PR** Siemens hardware-kit **CURRENT**

3VA52/61/62 breaker provision hardware kit (twin mount)

OEM part number	S3VA52PR	A	S165, S359 s1 pp.11-96, 11-110; s2 p.11-14; oem_spec
Description	Only required when installing a 3VA52, 3VA61 or 3VA62 breaker to an existing provision in the field; parts included with kit S3VA52T/S3VA52TD	A	S165 pp.11-96, 11-110; oem_spec
Application	Required (one per breaker) when adding a 3VA52/61/62 breaker to factory-installed provisions made before April 2021 lacking bus extensions	A	S359 single sheet; oem_spec
Kit contents	(3) bus extensions, (3) 3VA5 nut keepers, (3) 3VA6 nut keepers and hardware	A	S166 p.11-14; oem_spec
	3 3VA52 nut keepers; 3 3VA61/62 nut keepers; 3 bus extensions; 3 hex-head screws; 3 socket-head screws; 2 breaker mounting screws	A	S359 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1171-01 Rev. 01: S3VA52PR provision kit (3VA52/61/62 nut keepers and bus extensions)	A	same as above
Status	current	A	S165, S166 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00464	**F672**	Twin 200A Vacu-Break mounting kit, type F1 / 10in deep FPP	—	unknown

EDH-SIE-00464 **F672** Siemens switch-unit **STATUS UNKNOWN**

Twin 200A Vacu-Break mounting kit, type F1 / 10in deep FPP

OEM part number	F672	A	S486 pp.1-3; oem_spec
Description	Mounting kit for a Siemens twin 200 A Vacu-Break in type F1 and 10in FPP power panelboard; 3-ph 3W or 4W (discard neutral lug for 3W)	A	same as above
Application	branch; 10in unit space	A	same as above
Installation location	Neutral 350 kcmil lug on 'Z'-shaped connector on branch neutral (top or bottom of Z-rail)	A	same as above
Kit contents	1 200A twin Vacu-Break; 2 1/4-20x1/2 slotted truss screw*; 2 1/4in spacer*; 2 1/4-20x1.00 slotted HWH screw*; 1 mounting hardware kit; 2 350 kcmil lug; 4 1/4-20x1/2 hex head mach screw; 4 1/4 lock washer; 4 1/4 flat washer (*come with switch)	A	same as above
Dimensions	Fig 4: 1-1/4, 3-3/4, 3-3/4, 5/8in within 10in unit	A	same as above
Mounting-hole pattern	Truss screw + spacer form mounting stud in first 7/32in dia Z-rail hole 5/8in below top of 10in unit space; support brackets 1/4in hole + 3/8in open-end slot; 1/4-20x1 thread-forming into 7/32 Z-rail holes at bottom corners; A/C phase via 5/16-18x1-1/2 HWH screws, B phase through centre after removing cover	A	same as above
Cross-links	Families: P4		
Not yet documented	Material, Status, Torque values		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00210	**SQRC**	QR cover plate for P4/P5/SPP power panels	—	unknown

EDH-SIE-00210	SQRC	Siemens	other	STATUS UNKNOWN

QR cover plate for P4/P5/SPP power panels

OEM part number	SQRC	A	S165, S360 pp.11-96, 11-110 'Cover Plates'; oem_spec
Description	Cover plate for QR breaker; 'To replace a QJ with a QR only a new cover is needed'	A	S165 pp.11-96, 11-110; oem_spec
Application	branch (QJ to QR conversion cover)	A	S165 p.11-96; oem_spec
	Adding 225A max QR breaker to power panel or distribution switchboard that already has a QJ breaker; branch, 3-phase only	A	S360 single sheet; oem_spec
Kit contents	1 hybrid (QJ+QR) deadfront plate P4/P5/SB; 1 dual QR deadfront plate P4/P5/SB; 2 circuit ID cards; 2 card holders; 4 1/4-20 slotted washer head screws	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1139-01 Rev. 00: SQRC QR Breaker Retrofit Field Kit Installation Instructions for P4/P5/SB	A	same as above
Cross-links	Families: P4, P5, SB · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

6.8 P5 — Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard

FAM-SIE-008 · panelboard · aka F2, FPP deep, S5, SPP deep, Sentron Deep · markings: Siemens

Siemens 12.75in-deep distribution panelboard. Branch connecting strap kits carry a 'D' suffix (SBLBD, SE6D, SF6D, SJ1D, SMND...). SpeedFax footnote: these kits also fit Types FCI, FCII, SB1 and SB2 switchboards.

Attribute	Value	Cl.	Sources
Status	current	A	S165 p.11-103; oem_spec
Main ampacity	Branch devices to 1200A (NG1D/SMND)	A	S165 p.11-110; oem_spec
Installation notes	Unassembled P5 power panels (32 in / 38 in wide) ship with Type 1 enclosure, top feed; deadfront of removable filler plates; require separate main lug kit, main breaker kit or main switch kit (see label on back of deadfront); service equipment with single main or max six breakers/switches; interior held by four 1/4-20 screws and four 1/4 in Belleville washer nuts; deadfront by four 1/4-20 screws; large angled filler ~5.63 in from rail end	A	S295 pp. 2-4; oem_spec
Seismic mounting	Seismic-rated box installation: (4) 1/2-13 Grade 5 bolts with narrow flat washers tightened to 60 lb-ft; or minimum (4) 3/8-16 Grade 5 bolts with wide flat washers tightened to 30 lb-ft (center hole in each mounting bracket end)	A	S296 single sheet; oem_spec
Trim installation	Trims attached with 1/4-20 washer-head thread-forming screws: 1-piece trims 1-1/4 in only; 4-piece trims 1-1/4 in on exterior edges; 32 in wide P4 trims with deep inner flanges (1.56 in) 2 in screws on interior edges; 32/38 in wide P5 trims with shallow inner flanges (0.60 in) 1 in screws; hinges 1/4-20 x 1/2 countersunk screws + 1/4-20 Belleville nuts; trim cover screws 50 in-lb	A	S362 single sheet; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, NEB / HEB, QR2 / QRH2 / HQR2 / HQR2H, Sentron VL (DG, FG, JG, LG, MG, NG)

Key documents: S165 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S295 11-D-1013-01 Rev. 00 Installation Instructions - general use of Siemens P5 32in or 38in wide Power Panel (P5X60; S296 12-B-1015-01 Rev. 03 P4 / P5 Series Panelboard Box Installation For Seismic-Rated Panelboards; S362 11-A-1078-01 Rev. 02 Trim & Hinge Installation Instructions (P4 / P5)

Also fits this family (entry printed elsewhere): BEDITE, BQJITE, BFDITE, BJDSGLITE, BJDITE, BLDITE, BMDITE, DFFP1A, EBF1, SBL, S3VA41T, SGB2, S3VA52T, SDGD, SQR, SFG, S3VA53T, SJG, S3VA54T, SLG, MG1, SBLBD, S3VA41TD, SGB2D, S3VA52TD, 6QR2, SFGD, S3VA53TD, SJG1D, S3VA54TD, SLGD, MG1D, SLM1D, SQRD, S3VA52PR, SQRC, 6FPB01, 6FPB02, 6FPB03, 6FPB05, 6FPB10, SEBP4V1, SEBP4V2, SEBP4V3, SEB, SEBD, SDG, SLM1, SNB, SNBD, SMBKL6, SMBKL6D, SMBKLG, SMBKLG1D, SMBKMG, SMBKMG1D, SMLK12, SEBPPVA1, BQDHT2, BQDHT3, HPLQR, BQDPLD, HPLG, ED2HPL, FD6PL1, JD6HPL, MN6PLD, HBLQR, BQDHBD, E2HBL, FD6HB1, JD6HBL, MN6BL, EX11

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00468	**SMSKHCP**	P5 power panel main mounting kit for Sentron HCP switch	—	unknown

EDH-SIE-00468	SMSKHCP	Siemens	main-breaker-kit	STATUS UNKNOWN

P5 power panel main mounting kit for Sentron HCP switch

OEM part number	SMSKHCP	A	S491 pp.1-4; oem_spec
Alternate / superseded numbers	SMSKHCPP (Bucket file named SIE_IS_SMSKHCPP.pdf; document title reads SMSKHCP)	D	S491 alias; file name; inference
Description	Main mounting kit for Siemens Sentron HCP switch in deep (P5) panelboard, 3-ph 4-wire; HCP ships as branch device - move lugs from load to line side for main use	A	S491 pp.1-4; oem_spec
Application	main	A	same as above
Installation location	Main end of P5 panel; left feed shown, rotate 180 deg for right feed	A	same as above
Kit contents	3 1-3/8 stand-off insulator; 2 1/4-20x1 SHWHSW; 12 1/4-20x1-1/4 SHWHSW; 2 10-32x1/4 SHWHSW; 4 1/4-20x7/16 SHWHSW; 3 3/8-16x3/4 carriage bolt; 3 3/8-16x3/4 hex head bolt; 3 3/8N washer; 6 5/16-18x1-1/2 hex head bolt; 6 5/16N washer; 1 ground strap assembly; 1 HCP bracket support; 1 HCP installation instructions; 1 HCP switch main bracket; 3 helical spring lockwasher 3/8; 6 helical spring lockwasher 5/16; 1 support barrier; long/medium/short phase connector inner & outer (1 each); 6 threaded insert	A	same as above
Mounting-hole pattern	Strap assembly top 15in from top (or bottom) of Z-rail; long connectors at 0.228 section-bus hole 1.25in below unit-space top, medium 8.75in, short 13.75in (1/4-20x1-1/4 through 0.312 holes); HCP bracket support at 0.228 Z-rail hole 5.625in down; inserts into 0.406 holes; carriage bolt through 0.437 square opening; ground ring terminals on 0.171 holes	A	same as above
Torque values	Per rear of deadfront label	A	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Material, Status		
Open question	*Is the catalog number SMSKHCP or SMSKHCPP (file name)? Check SPEEDFAX P5 main kits table.*		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00155	**6CLE2**	6CLE2 connecting strap kit - CED (3.75in, twin)	CED [s1]; CED6 [s3]; CED6 [s2] A	listed in SpeedFax 2021, 2005 price list, Siemens Canada cat
EDH-SIE-00188	**6E62**	6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)	ED2, ED4, ED6, HED4, HED6 [s3]; ED2, ED4, ED6, HED4 [s2] A	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00190	**6F62**	6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)	FXD6, FD6, HFD6 [s3]; FXD6, FD6, HFD6, HHFD6 [s2] A	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00192	**6JJ61**	6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single)	JXD2, JXD6, JD6, HJD6 single branch [s3] A	listed in 2005 price list
EDH-SIE-00193	**6JJ62**	6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)	JXD2, JXD6, JD6, HJD6 double branch [s3]; JXD6, JD6, HJD6, HHJD6 [s2] A	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00197	**6LL61**	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	LXD6, LD6, HLD6 [s3]; LXD6, LD6, HLD6, HHLD6, SLD6, SHLD6 [s2] A	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00189	**6QJ2**	6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)	QJ2, QJH2, QJ2-H [s3] A	listed in 2005 price list
EDH-SIE-00195	**6SJL1**	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	SJL, SJD6, SHJD6 [s3]; SJD6, SHJD6 [s2] A	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00199	**6SLL1**	6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)	SLL, SLD6, SHLD6 [s3] A	listed in 2005 price list
EDH-SIE-00403	**F602D**	P5/F2 (deep) Vacu-Break fusible switch mounting kit, 2.5 in high twin units (30A)	Siemens Vacu-Break fusible switch 2.5 in high twin units (30A) A	unknown
EDH-SIE-00404	**F657D**	P5/F2 (deep) Vacu-Break fusible switch mounting kit, 5 in and 7.5 in high twin units (30, 60, 100A)	Siemens Vacu-Break fusible switch 5 in and 7.5 in high twin units (30, A	unknown
EDH-SIE-00405	**F671D**	P5/F2 (deep) Vacu-Break fusible switch mounting kit, 7.5 in and 10 in high single units (200A)	Siemens Vacu-Break fusible switch 7.5 in and 10 in high single units (A	unknown
EDH-SIE-00179	**NG1D**	NG1D connecting strap kit - VL NG (10.00in, single)	VL NG [s1]; NN, HN, LN, SNN, SHN, SLN [s3] A	listed in SpeedFax 2021, 2005 price list

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00152	**S3VA41TDHD**	S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)	3VA41, xGB [s1]; 3VA41 [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00182	**S3VA53T2D**	S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)	3VA53, 3VA63 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00185	**S3VA54T2D**	S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)	3VA54, 3VA64 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00186	**S3VA55TD**	S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)	3VA55, 3VA65; 3VA66 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00187	**S3VA57TD**	S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)	3VA57, 3VA67 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00162	**S3VA63TD**	S3VA63TD connecting strap kit - 3VA63 (6.25in, single)	3VA63 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00169	**S3VA64TD**	S3VA64TD connecting strap kit - 3VA64 (6.25in, single)	3VA64 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00180	**SCED**	SCED connecting strap kit - CED (3.75in, twin)	CED [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00160	**SCFD**	SCFD connecting strap kit - Sentron CFD (5.00in, single)	Sentron CFD [s1]; CFD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00167	**SCJD**	SCJD connecting strap kit - Sentron CJD (8.75in, single)	Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; S **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00172	**SCLD**	SCLD connecting strap kit - Sentron CLD (8.75in, single)	Sentron CLD [s1]; CLD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00154	**SE6D**	SE6D connecting strap kit - ED (3.75in, twin)	ED [s1]; ED [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00159	**SF6D**	SF6D connecting strap kit - Sentron FD (5.00in, twin)	Sentron FD [s1]; FD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00165	**SJ1D**	SJ1D connecting strap kit - Sentron JD (8.75in, single)	Sentron JD [s1]; JD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00166	**SJ2D**	SJ2D connecting strap kit - Sentron JD (8.75in, twin)	Sentron JD [s1]; JD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00163	**SJG2D**	SJG2D connecting strap kit - VL JG (6.25in, twin)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00171	**SL6D**	SL6D connecting strap kit - Sentron LD (8.75in, single)	Sentron LD [s1]; LD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00177	**SMND**	SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)	Sentron MD, CMD; ND [s1]; MD, CMD; ND [s2]; MD6, HMD6, CMD6 [s3]; ND6, **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00469	**SQJD**	QJ breaker branch mounting kit (switchboards or deep panelboards)	QJ (QJ2 family) **A**	unknown
EDH-SIE-00184	**SSCJD**	SSCJD connecting strap kit - SCJD (8.75in, single)	SCJD [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00174	**SSCLD**	SSCLD connecting strap kit - Sentron SCLD (8.75in, single)	Sentron SCLD [s1]; SCLD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00183	**SSJ1D**	SSJ1D connecting strap kit - SJD (8.75in, single)	SJD [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00173	**SSL6D**	SSL6D connecting strap kit - Sentron SLD (8.75in, single)	Sentron SLD [s1]; SLD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00178	**SSMND**	SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)	Sentron SMD; SND [s1]; SMD; SND [s2]; SMD6, SHMD6, SCMD6 [s3]; SND6, S **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005

EDH-SIE-00155	**6CLE2**	Siemens	branch-connector-kit	**LISTED IN SPEEDFAX 202**

6CLE2 connecting strap kit - CED (3.75in, twin)

OEM part number	6CLE2	**A**	S165, S329, S473, S589 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Alternate / superseded numbers	CED6 ('Merchandise kit no. CED6' on BOM)	**A**	S473 alias; BOM 11-5068-05 line 44; oem_spec
	11-5068-05 (Siemens BOM/drawing number of the kit)	**A**	S473 alias; BOM; oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	**A**	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
	Strap kit for twin (double) mounting ITE type CLE, CLE-A and CED6 breakers 15-125 A on Series 5/6 copper branch bus (merchandise kit no. CED6)	**A**	S473 p.1 (drawing 11-5068-00, BOM 11-5068-05); oem_spec
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	**A**	S165, S167, S166 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	branch	**A**	S473 p.1 (drawing 11-5068-00, BOM 11-5068-05); oem_spec
	branch, twin mounting	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Series 5 or 6 distribution sections: CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3. Existing CDP-5/VB-5/FC20 vertical bus pre-punched 0.406 in dia holes -> use Series 5 adaptor kit furnished; CDP-6/VB-6/FCI/FCII vertical bus pre-punched 0.228 in dia holes -> Series 6 branch bus parts list	**A**	S329 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Series 5 or 6 distribution sections, CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3	**A**	S473 p.1 (drawing 11-5068-00, BOM 11-5068-05); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	CED [s1]; CED6 [s3]; CED6 [s2]	**A**	S165, S167, S166 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	CED6 frame branch breaker 15-125 A, double mounting; I-T-E type CLE, CLE-A, CED6	**A**	S329 single sheet drawing + BOM (scanned image, read visually); oem_spec
	ITE CLE, CLE-A, CED6 (15-125 A)	**A**	S473 p.1 (drawing 11-5068-00, BOM 11-5068-05); oem_spec
	General CED (max 125 A)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	125A max (table max-amp rating)	**A**	S165, S167, S166 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	125 A max	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S165, S167, S166 p.11-110 | p.8-13 | p.11-15; oem_spec

	BOM 11-5068-05: E2-4-6 AC-phase branch bus 11-7140-01 x2; B-phase 11-7141-01 x1; line connector 11-7138-01 x3; interphase barrier 15-7505-01 x2; mounting bracket 15-B-3016-02 x2; 3.750 cover plate 12-6024-01; circuit ID card x2; card holder x2; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; strap bus hardware kit 11-B-2022-05; 10-24 x 5/8 ISHDWHSW 11-1576-07 x12; 8-32 x 4-3/16 SRHSW 11-1510-15 x6; 1/4-20 x 5/8 SHWHSW 11-1553-06 x4; neutral lug assembly 12-B-2105-02; blank filler 12-5531-09 x2; Series 5 conversion kit 11-5570-01; instruction sheet 31-1153-01	A	S329 single sheet drawing + BOM (scanned image, read visually); oem_spec
	BOM 11-5068-05: 2 E2-4-6 AC-phase branch bus 11-7140-01; 1 E2-4-6 B-phase branch bus 11-7141-01; 3 E2-4-6 line connector 11-7138-01; 2 interphase barrier 15-7505-01; 2 E2-4-6 mounting bracket 15-B-3016-02; 1 3.750 E2-4-6 cover plate 12-6024-01; 2 circuit ID card 11-7505-01; 2 card holder 11-7506-01; 6 1/4-20x3/8 SHWHSW 11-1553-02; 1 strap bus hardware kit 11-B-2022-05; 12 10-24x5/8 ISHOWHSW 11-1576-07; 6 8-32x4-3/16 SRHSW 11-1510-15; 4 1/4-20x5/8 SHWHSW 11-1553-06; 1 neutral lug assembly 12-B-2105-02; 2 blank filler 12-5531-09; 1 Series 5 conversion kit 11-5570-01; instruction sheet 31-1153-01; carton label 15-A-1027-01; carton 48001056	A	S473 p.1 (drawing 11-5068-00, BOM 11-5068-05); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S166 p.11-15; oem_spec
	Copper branch bus	A	S329 single sheet drawing + BOM (scanned image, read visually); oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S165, S167, S166, S589 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Location dims A 3.750 / B 0.625 / C 1.250 (-01/-03) or 6.250 / 1.875 / 2.500 (-02/-04) in; 2.500 in	A	S329 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Location dims per B/M: 11-5068-01/-03 A=3.750 B=0.625 C=1.250; 11-5068-02/-04 A=6.250 B=1.875 C=2.500; 2.500 vertical pitch	A	S473 p.1 (drawing 11-5068-00, BOM 11-5068-05); oem_spec
Mounting-hole pattern	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes	A	same as above
Torque values	Item 10: 50 in-lb Al / 72 in-lb Cu; item 11: 30 in-lb Al / 50 in-lb Cu; Series 5 adaptor 5/16-18 HHMS 13 ft-lb	A	S329 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Item 10 (strap bus hardware): 50 in-lb AL / 72 in-lb CU; item 11 (10-24 screws): 30 in-lb AL / 50 in-lb CU; Series 5 adaptor 5/16-18 bolts 13 ft-lb	A	S473 p.1 (drawing 11-5068-00, BOM 11-5068-05); oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1153-01 Rev. 00: SEBKP2V3 Service Entrance Barrier Kit for P2 or P3 Panelboards (with or without SEM3)	A	S329 single sheet drawing + BOM (scanned image, read visually); oem_spec
Status	listed in SpeedFax 2021, 2005 price list, Siemens Canada catalogue 2025	A	S165, S167, S166 oem_spec
Identification features	2005 list price $845.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6, Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Finish / plating		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00188	6E62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)

OEM part number	6E62	A	S167, S285, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec

Description	Connecting strap kit (breaker not included) for ED2, ED4, ED6, HED4, HED6 branch breaker(s), twin (d) mount, 3.75in unit height	**A**	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	**A**	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	branch, twin mounting	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Series 5 or 6 distribution sections: CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3. Existing CDP-5/VB-5/FC20 vertical bus pre-punched 0.406 in dia holes -> use Series 5 adaptor kit furnished; CDP-6/VB-6/FCI/FCII vertical bus pre-punched 0.228 in dia holes -> Series 6 branch bus parts list	**A**	S285 drawing 11-5079-00 / BOM 11-5079-05 (image, read visually); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	ED2, ED4, ED6, HED4, HED6 [s3]; ED2, ED4, ED6, HED4 [s2]	**A**	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	E-2-4-6 frame branch breaker 15-125 A, double mounting: ITE E2, E4, E6, HE4, HE6; E2-A, E4-A, E6-A, HE4-A, HE6-A; ED2, ED4, ED6, HED4, HED6	**A**	S285 drawing 11-5079-00 / BOM 11-5079-05 (image, read visually); oem_spec
	General ED (max 125 A)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	125 A max	**A**	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S167, S166 p.8-13 | p.11-15; oem_spec
	BOM 11-5079-05: (1) E2-4-6 phase AC branch bus 11-7140-01 x2; (2) phase B branch bus 11-7141-01 x1; (3) E2-4-6 line connector 11-7138-01 x3; (4) interphase barrier 15-7505-01 x2; (5) E2-4-6 mounting bracket 15-B-3014-02 x2; (6) 3.750 E2-4-6 cover plate 12-6024-01 x1; (7) circuit ID card 11-7505-01 x2; (8) card holder 11-7506-01 x2; (9) 1/4-20 x 3/8 SHWHSW 11-1553-02 x2; (10) strap-bus hardware kit 11-B-2022-05 x1; (11) 10-24 x 5/8 ISHDWHSW 11-1576-07 x12; (13) 1/4-20 x 5/8 SHWHSW 11-1553-06 x8; (14) neutral lug assembly 12-B-2105-02 x1; (16) blank filler 12-5531-09 x2; (27) Series 5 conversion kit 11-5570-01 x1; instruction sheet 31-1143-01; carton 48001056	**A**	S285 drawing 11-5079-00 / BOM 11-5079-05 (image, read visually); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	S166 p.11-15; oem_spec
	Copper branch bus	**A**	S285 drawing 11-5079-00 / BOM 11-5079-05 (image, read visually); oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S167, S166, S589 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Location dimensions: BOM -01/-03 A 3.75 / B 0.63 / C 1.25 in; BOM -02/-04 A 6.25 / B 1.88 / C 2.50 in; 2.50 in shown	**A**	S285 drawing 11-5079-00 / BOM 11-5079-05 (image, read visually); oem_spec
Torque values	Item 10 strap-bus hardware: 50 in-lb Al / 72 in-lb Cu; item 11 10-24 screws: 30 in-lb Al / 50 in-lb Cu	**A**	same as above
OEM instruction document	Siemens instruction sheet 31-1143-01 Rev. 4: CAT. NO. 6E62 instruction sheet with drawing 11-5079-00 Rev 10 'ED2, ED4 & ED6 Mounting Series 6 Branch Bus' and BOM 11-5079-05 Rev 8	**A**	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	**A**	S167, S166 oem_spec

Aftermarket / reproduction	Breaker King offers BEDITE (kit # ED65K) as a replacement ('Kit # ED65K replaces OEM 6E62 and SE6D'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Identification features	2005 list price $845.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6, Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Finish / plating, Mounting-hole pattern		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00190	6F62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)

OEM part number	6F62	A	S167, S286, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for FXD6, FD6, HFD6 branch breaker(s), twin (d) mount, 5in unit height	A	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	branch, twin mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Series 5 or 6 distribution sections: CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3. Existing CDP-5/VB-5/FC20 vertical bus pre-punched 0.406 in dia holes -> use Series 5 adaptor kit furnished; CDP-6/VB-6/FCI/FCII vertical bus pre-punched 0.228 in dia holes -> Series 6 branch bus parts list	A	S286 drawing 11-5098-00 / BOM 11-5098-04 (image, read visually); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	FXD6, FD6, HFD6 [s3]; FXD6, FD6, HFD6, HHFD6 [s2]	A	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	FD6 frame branch breaker, twin mounted, 70-250 A: FJ6, F6, HF6, FXD6, FD6, HFD6 (sheet front panel header reads 'for use with CLE-6 frame' - apparent sheet error)	A	S286 drawing 11-5098-00 / BOM 11-5098-04 (image, read visually); oem_spec
	Sentron FD (max 250 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	250 A max	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S167, S166 p.8-13 | p.11-15; oem_spec
	BOM 11-5098-04: F6 phase AC front branch bus 12-7031-01 x2; F6 phase AC rear branch bus 12-7032-01 x2; F6 phase B branch bus 12-7033-01 x1; F6 phase B heat sink 11-6846-01 x2; F6 mounting bracket 15-B-3018-02 x2; 5 in F6 cover plate 12-6028-01 x1; circuit ID card 11-7505-01 x2; card holder 11-7506-01 x2; 1/4-20 x 3/8 SHWHSW 11-1553-02 x4; strap-bus hardware kit (A & C phases) 11-B-2023-05 x1; 8-32 x 5/8 IHWHSW 11-1512-07 x4; 1/4-20 x 1 SHWHSW 11-1553-09 x6; 1/4-20 x 4 SRHMS 11-1542-19 x4; 1/4-20 x 5/8 SHWHSW 11-1553-06 x2; blank filler 12-5531-10 x2; neutral lug assembly 12-B-2105-03 x2; phase B barrier (for provisions) 11-7548-02 x4; Series 5 conversion kit 11-5570-01 x1; strap-bus hardware kit (B phase) 11-B-2022-05 x1	A	S286 drawing 11-5098-00 / BOM 11-5098-04 (image, read visually); oem_spec

	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S166 p.11-15; oem_spec
	Copper branch bus	A	S286 drawing 11-5098-00 / BOM 11-5098-04 (image, read visually); oem_spec
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S167, S166, S589 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	5.00 in unit; location dims 3.75, 1.25, 0.63 in	A	S286 drawing 11-5098-00 / BOM 11-5098-04 (image, read visually); oem_spec
Torque values	Strap-bus hardware: 50 in-lb Al / 72 in-lb Cu. Series 5 adaptor kit: 5/16-18 x 1-1/4 HHMS 13 ft-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1145-01 Rev. 4: CAT. NO. 6F62 instruction sheet with drawing 11-5098-00 Rev 6 'FD Frame Mounting Series 6 Branch Bus', BOM 11-5098-04 Rev 8, Series 5 adaptor kit 11-5570-01 Rev 3	A	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S167, S166 oem_spec
Aftermarket / reproduction	Breaker King offers BFDITE (kit # FD65K) as a replacement ('Kit # FD65K replaces OEM 6F62 and SF6D'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Identification features	2005 list price $1529.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00192	6JJ61	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single)

OEM part number	6JJ61	A	S167, S364, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for JXD2, JXD6, JD6, HJD6 single branch branch breaker(s), single (s) mount, 8.75in unit height	A	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single (S)	A	S167 p.8-13 (2005) (s3); oem_spec
	branch, single mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S364 pp. 2-4 (image); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	JXD2, JXD6, JD6, HJD6 single branch [s3]	A	S167 p.8-13 (2005) (s3); oem_spec

	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S364 pp. 2-4 (image); oem_spec
	Sentron JD (max 250 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	250 A max	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S167 p.8-13; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S364 pp. 2-4 (image); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper straps	A	S167 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S167, S589 p.8-13 (2005) (s3); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S364 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in 2005 price list	A	S167 oem_spec
Aftermarket / reproduction	Breaker King offers BJDSGLITE (kit # JDS65K) as a replacement ('Kit # JDS65K replaces OEM 6JJ61 and SJ1D'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Identification features	2005 list price $2122.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Finish / plating		

EDH-SIE-00193	6JJ62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)

OEM part number	6JJ62	A	S167, S287, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for JXD2, JXD6, JD6, HJD6 double branch branch breaker(s), twin (d) mount, 8.75in unit height	A	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec

	branch, twin mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Series 5 or 6 distribution sections: CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3. Existing CDP-5/VB-5/FC20 vertical bus pre-punched 0.406 in dia holes -> use Series 5 adaptor kit furnished; CDP-6/VB-6/FCI/FCII vertical bus pre-punched 0.228 in dia holes -> Series 6 branch bus parts list	A	S287 drawing 12-5721 Rev 11 (image, read visually); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	JXD2, JXD6, JD6, HJD6 double branch [s3]; JXD6, JD6, HJD6, HHJD6 [s2]	A	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	ITE breaker types JD2, JJ6, JL6, HJ6, HJD6, JXD2, JXD6, JD6, HHJD6 (400 A)	A	S287 drawing 12-5721 Rev 11 (image, read visually); oem_spec
	Sentron JD (max 400 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	400 A max	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S167, S166 p.8-13 | p.11-15; oem_spec
	Mounting bracket 11-6398-01 x2; phase AC branch bus 16-6974-01 x2; phase B branch bus 16-6949-02 x1; 5/16-18 x 1-1/4 HHMS 11-1566-07 x6; 5/16 lock washer 11-1618-04 x6; 5/16 flat washer 11-1615-06 x6; 5/16-18 insert 11-1620-04 x6; front plate 12-6139-01; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; strap-bus hardware kit 11-B-2022-05 x2; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; filler plate assembly 12-5531-11; circuit ID card 11-7505-01 x2; card holder 11-7506-01 x2; (-02/SJ2D column only) 1/4-20 x 5/8 HHMS 11-1546-03 x4 with 1/4 lock and flat washers, instruction sheet 31-1223-01; 3/8-16 x 1 RHSNB 11-1580-02 and 3/8-16 Belleville washer nut 11-1622-01 listed (quantities not legible); (-01/6JJ62 column only) Series 5 conversion kit 11-5570-02 and instruction sheet 31-1169-01; neutral lug assembly 12-B-2105-04 (6JJ62) / 12-B-2105-06 (SJ2D). Column assignment read from a scanned drawing - verify	A	S287 drawing 12-5721 Rev 11 (image, read visually); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S166 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S167, S166, S589 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Branch bus layout 3.75 / 8.75 / 3.13 in	A	S287 drawing 12-5721 Rev 11 (image, read visually); oem_spec
Torque values	Item 4 (5/16-18 x 1-1/4 HHMS) 12 ft-lb; item 10 strap-bus hardware 72 in-lb; Series 5 adaptor 5/16-18 bolts 13 ft-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1169-01 Rev. 3: CAT. NO. 6JJ62 instruction sheet with drawing 12-5721 Rev 11 'JD Frame Twin Mounting Series 6 Branch' (-01 = 6JJ62, -02 = SJ2D) and Series 5 adaptor kit 11-5570-02	A	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S167, S166 oem_spec
Aftermarket / reproduction	Breaker King offers BJDITE (kit # JD65K) as a replacement ('Kit # JD65K replaces OEM 6JJ62 and SJ2D'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Identification features	2005 list price $2349.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00197	6LL61	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)

OEM part number	6LL61	A	S167, S364, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6LL61C	A	S166 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for LXD6, LD6, HLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	branch, single mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S364 pp. 2-4 (image); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	LXD6, LD6, HLD6 [s3]; LXD6, LD6, HLD6, HHLD6, SLD6, SHLD6 [s2]	A	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S364 pp. 2-4 (image); oem_spec
	Sentron LD (max 600 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	600 A max	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S167, S166 p.8-13 | p.11-15; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S364 pp. 2-4 (image); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper only; Canadian catalogue lists as 6LL61C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S166 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S167, S166, S589 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S364 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above

OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S167, S166 oem_spec
Aftermarket / reproduction	Breaker King offers BLDITE (kit # LD65K) as a replacement ('Kit # LD65K replaces OEM 6LL61 and SL6D'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Identification features	2005 list price $2525.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Finish / plating		

EDH-SIE-00189	6QJ2	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)

OEM part number	6QJ2	A	S167, S492, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for QJ2, QJH2, QJ2-H branch breaker(s), twin (d) mount, 5in unit height	A	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
	Branch mounting kit for Siemens QJ breakers in switchboards / distribution sections; 5in unit space; 3-ph 3W or 4W (document covers SQJD/6QJ2/SQJ)	A	S492 pp.1-4; oem_spec
Application	branch (unit-space mounted); mounting: Twin (D)	A	S167 p.8-13 (2005) (s3); oem_spec
	branch	A	S492 pp.1-4; oem_spec
	branch, twin mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Branch neutral lugs at bottom (or top) of Z-rails; two neutral lug assembly types supplied (panelboard vs switchboard)	A	S492 pp.1-4; oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	QJ2, QJH2, QJ2-H [s3]	A	S167 p.8-13 (2005) (s3); oem_spec
	QJ (QJ2 family)	A	S492 pp.1-4; oem_spec
	General QJ (max 225 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	225 A max	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S167 p.8-13; oem_spec
	1 installation instructions; 2 A/C strap; 1 B strap; 1 strap-section bus hardware kit; 2 A/C link bar; 1 B link bar; 2 QJ mounting bracket; 1 5in QJ cover plate; 2 card holder; 1 circuit ID card; 2 neutral lug ass'y; 6 1/4-20x3/8 screw; 12 1/4-20x5/8 screw; 4 1/4-20x2-3/4 screw; box; carton label	A	S492 pp.1-4; oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec

Material	copper straps	A	S167 p.8-13; oem_spec
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S167, S589 p.8-13 (2005) (s3); oem_spec
	5.00in unit space; 1.25, 2.50, 1.50in	A	S492 pp.1-4; oem_spec
Mounting-hole pattern	B strap 1-1/4in below top of 5.0in unit space, two 1/4-20 thread-forming into 0.228 holes; C strap 2.50in below A/B screws; QJ bracket at 0.228 Z-rail hole 5/8in below A-strap screws via 0.312 bracket holes; link bars 0.281 holes, 1.50in between centres; breaker line: 1/4-20x5/8 into each contact; load: two 1/4-20x2-3/4 thread-forming into bracket 0.228 holes	A	same as above
Torque values	Per label on rear of deadfront (not printed on sheet)	A	same as above
Status	listed in 2005 price list	A	S167 oem_spec
Aftermarket / reproduction	Breaker King offers BQJITE (kit # QJ65K) as a replacement ('Kit # QJ65K replaces OEM 6QJ2 and SQJD'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Identification features	2005 list price $1529.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H, QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Finish / plating, OEM instruction document		
Open question	*Sheet is common to SQJD/6QJ2/SQJ; the item list may differ per variant (shallow kit shown only as reference).*		

EDH-SIE-00195	6SJL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)

OEM part number	6SJL1	A	S167, S364, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6SJL1C	A	S166 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for SJL, SJD6, SHJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	branch, single mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S364 pp. 2-4 (image); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	SJL, SJD6, SHJD6 [s3]; SJD6, SHJD6 [s2]	A	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S364 pp. 2-4 (image); oem_spec
	Sentron SJD (max 400 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	400 A max	A	same as above

Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S167, S166 p.8-13 | p.11-15; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S364 pp. 2-4 (image); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper only; Canadian catalogue lists as 6SJL1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S166 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S167, S166, S589 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S364 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S167, S166 oem_spec
Identification features	2005 list price $2122.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Finish / plating		

EDH-SIE-00199	6SLL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)

OEM part number	6SLL1	A	S167, S364, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SLL, SLD6, SHLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single (S)	A	S167 p.8-13 (2005) (s3); oem_spec
	branch, single mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S364 pp. 2-4 (image); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec

Breaker compatibility	SLL, SLD6, SHLD6 [s3]	A	S167 p.8-13 (2005) (s3); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S364 pp. 2-4 (image); oem_spec
	Sentron SLD (max 600 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	600 A max	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S167 p.8-13; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S364 pp. 2-4 (image); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper straps	A	S167 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S167, S589 p.8-13 (2005) (s3); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S364 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in 2005 price list	A	S167 oem_spec
Identification features	2005 list price $2525.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Finish / plating		

EDH-SIE-00403 F602D Siemens lineage branch-connector-kit STATUS UNKNOWN

P5/F2 (deep) Vacu-Break fusible switch mounting kit, 2.5 in high twin units (30A)

OEM part number	F602D	A	S392 sheet header text; oem_spec
Installation location	SPP/FPP/S5/F2/P5 panelboards (deep box)	A	same as above
Breaker compatibility	Siemens Vacu-Break fusible switch 2.5 in high twin units (30A)	A	same as above
OEM instruction document	Siemens instruction sheet 31-1239-01 Rev. 2: CAT. NO. F602D Vacu-Break mounting kit for 2.5 in high twin units (30A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	A	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Kit contents, Torque values		

EDH-SIE-00404	F657D	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

P5/F2 (deep) Vacu-Break fusible switch mounting kit, 5 in and 7.5 in high twin units (30, 60, 100A)

OEM part number	F657D	A	S393 sheet header text; oem_spec
Installation location	SPP/FPP/S5/F2/P5 panelboards (deep box)	A	same as above
Breaker compatibility	Siemens Vacu-Break fusible switch 5 in and 7.5 in high twin units (30, 60, 100A)	A	same as above
OEM instruction document	Siemens instruction sheet 31-1240-01 Rev. 2: CAT. NO. F657D Vacu-Break mounting kit for 5 in and 7.5 in high twin units (30, 60, 100A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	A	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Kit contents, Torque values		

EDH-SIE-00405	F671D	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

P5/F2 (deep) Vacu-Break fusible switch mounting kit, 7.5 in and 10 in high single units (200A)

OEM part number	F671D	A	S394 sheet header text; oem_spec
Installation location	SPP/FPP/S5/F2/P5 panelboards (deep box)	A	same as above
Breaker compatibility	Siemens Vacu-Break fusible switch 7.5 in and 10 in high single units (200A)	A	same as above
OEM instruction document	Siemens instruction sheet 31-1242-01 Rev. 2: CAT. NO. F671D Vacu-Break mounting kit for 7.5 in and 10 in high single units (200A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	A	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Kit contents, Torque values		

EDH-SIE-00179	NG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

NG1D connecting strap kit - VL NG (10.00in, single)

OEM part number	NG1D	A	S165, S494, S589 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL NG branch breaker(s), single mount, 10.00in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
	Branch mounting kit for Siemens VL N frame breakers in switchboard or deep panelboards; 10in unit space; 3-ph 3W/4W	A	S494 pp.2-4; oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S165, S167 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
	branch	A	S494 pp.2-4; oem_spec
	branch, single mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	same as above
Breaker compatibility	VL NG [s1]; NN, HN, LN, SNN, SHN, SLN [s3]	A	S165, S167 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
	VL N frame (NG); TMTU and ETU types	A	S494 pp.2-4; oem_spec
	VL NG (max 800 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec

Current rating	1200A max (table max-amp rating)	A	S165, S167 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
	800 A max	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S165, S167 p.11-110 | p.8-13; oem_spec
	1 VL N breaker installation instr.; 4 branch neutral lug assy; 1 long, 1 medium, 1 short phase connector; 1 strap-section bus hardware kit; 1 phase bracket; 1 phase brace; 1 breaker mount; 2 branch brkr cover panel (single cut-out for TMTU, 'T' cut-out for ETU); 1 card holder; 1 circuit ID card; 2 1/4-20x3/8 SHWHSW; 7 1/4-20x1/2 SHWHSW; 6 1/4-20x5/8 SHWHSW; 6 5/16N washer; 6 5/16-18x1-3/8 HWHSW SEMS; 2 1/4-20x3-3/4 SHWHSW; 1 packaging assembly; 1 handle holder kit - M/N breakers; 1 gutter barrier	A	S494 pp.2-4; oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper straps	A	S167 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S165, S167 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
	10.00in unit space	A	S494 pp.2-4; oem_spec
	Unit height 10 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Mounting-hole pattern	Phase bracket at 0.228 Z-rail holes 3-1/8in down from top and up from bottom of 10in unit space (1/4-20x1/2 via 0.312 holes); phase connectors four 1/4-20 thread-forming each via 0.312 into 0.228 bus holes; breaker line: two 5/16-18x1-3/8 thread-forming per contact into 0.284 holes; load: two 1/4-20 thread-forming via 0.69 holes (step 7 text says 1/4-20x1-1/2; parts table lists 1/4-20x3-3/4) into 0.228 holes in breaker mount	A	S494 pp.2-4; oem_spec
Torque values	Per rear of deadfront label	A	same as above
Status	listed in SpeedFax 2021, 2005 price list	A	S165, S167 oem_spec
Identification features	2005 list price $3489.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, OEM instruction document		
Open question	*Item 18 length conflict: parts table 1/4-20x3-3/4 SHWHSW vs step 7 text 1/4-20x1-1/2.*		

EDH-SIE-00152	**S3VA41TDHD**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)

OEM part number	S3VA41TDHD	A	S165, S280 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin, high density (six 2-pole breakers) mount, 7.50in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin, high density, Twin, high density (six 2-pole breakers)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
Breaker compatibility	3VA41, xGB [s1]; 3VA41 [s2] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec

	2-pole 3VA41 (SEAB, MEAB, HEAB) or xGB (NGB, HGB, LGB)	A	S280 pp. 1-4; oem_spec
Current rating	125A max (table max-amp rating)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
	2 A/C-phase runbacks; 4 A/C-phase straps; 2 B-phase runbacks; 2 B-phase straps; 2 barrier support brackets; 2 top barriers; 1 7.5 in cover plate; 12 circuit ID cards; 12 card holders; blank fillers; bus hardware kit; 4 #10-24 x 3/8 HHWS; 12 #10-24 x 5/8 SHCS; 6 1/4-20 x 3/8 HHWS; 1/4-20 x 5/8 HHWS; 4 #8-32 x 5/8 HHWS; branch neutral connector; 2 branch neutral terminal strips	A	S280 pp. 1-4; oem_spec
Dimensions	Unit height 7.50 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 7.5 in of unit space; 7.5 in cover plate	A	S280 pp. 1-4; oem_spec
Mounting-hole pattern	Locate 0.228 in hole in A-phase bus 1.25 in down from top of the 7.5 in unit space	A	same as above
Torque values	#8-32 35 lb-in; others per deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1058-01 Rev. 00: Distribution Switchboard / Power Panel Kit S3VA41TDHD for Branch Mounting of 2-pole 3VA41 or xGB Breakers (high density)	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Finish / plating, Material		

EDH-SIE-00182	**S3VA53T2D**	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)

OEM part number	S3VA53T2D	A	S166, S288 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53, 3VA63 branch breaker(s), twin mount, 6.25in unit height	A	S166 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S166 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S166 p.11-5; oem_spec
	Distribution switchboard or 38 in wide P5 power panel; 1-ph 2/3-w or 3-ph 3/4-w	A	S288 pp. 1-4; oem_spec
Breaker compatibility	3VA53, 3VA63 [s2]	A	S166 p.11-5 (s2); oem_spec
	3VA53 (MJAS, HJAS, CJAS) or 3VA63 (MJAE, HJAE, CJAE, LJAE) in 400A application; breakers and lugs not included	A	S288 pp. 1-4; oem_spec
Current rating	400A max (table max-amp rating)	A	S166 p.11-5 (s2); oem_spec
Kit contents	2 A/C-phase straps; 1 B-phase strap; 2 breaker mounting brackets; 1 6.25 in cover plate; 2 filler plates; 1 interphase barrier; 8 provision barriers; 2 circuit ID cards; 2 card holders; panelboard and switchboard neutral branch lug assys; 4 #10-32 breaker mounting screws (20 lb-in); 4 #10-24 x 1/2 carriage bolts; 4 #10 lock nuts (20 lb-in); 6 1/4-20 x 3/8 HHWS (72 lb-in); 4 1/4-20 x 1/2 HHWS (72 lb-in); 6 3/8-16 x 1-1/8 SEMS (240 lb-in); 1 'Standard Bus Hardware Kit' strap-to-section (72 lb-in; 18 fasteners, select per card). Strap components differ for 400A vs 600A.	A	S288 pp. 1-4; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S166 p.11-5 (s2); oem_spec
	Requires 6.25 in of unit space (figure dims 2.50 in, 1.87 in, 3.13 in)	A	S288 pp. 1-4; oem_spec
Mounting-hole pattern	B-phase strap: four 1/4-20 screws through strap into B bus; A/C straps four 1/4-20 screws each	A	same as above
Torque values	Breaker stab to strap 3/8-16 x 1-1/8 SEMS 240 lb-in; bus hardware 72 lb-in; single-barrel lug mounting screws 142 lb-in to nutkeeper; double-barrel lug mounting screws 355 lb-in to nutkeeper	A	same as above

OEM instruction document	11-B-1086-01; handle extension per 11-B-1088-01; breaker caution label 11-B-1067-01	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S166 oem_spec
Cross-links	Families: P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00185	**S3VA54T2D**	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)

OEM part number	S3VA54T2D	A	S166, S288 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54, 3VA64 branch breaker(s), twin mount, 6.25in unit height	A	S166 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S166 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 46in	A	S166 p.11-5; oem_spec
	Distribution switchboard or 38 in wide P5 power panel; 1-ph 2/3-w or 3-ph 3/4-w	A	S288 pp. 1-4; oem_spec
Breaker compatibility	3VA54, 3VA64 [s2]	A	S166 p.11-5 (s2); oem_spec
	3VA53/3VA63 or 3VA54 (MLAS, HLAS, CLAS) / 3VA64 (MLAE, HLAE, CLAE) in 600A application; a 400A breaker can be installed in a 600A twin kit; breakers and lugs not included	A	S288 pp. 1-4; oem_spec
Current rating	600A max (table max-amp rating)	A	S166 p.11-5 (s2); oem_spec
Kit contents	2 A/C-phase straps; 1 B-phase strap; 2 breaker mounting brackets; 1 6.25 in cover plate; 2 filler plates; 1 interphase barrier; 8 provision barriers; 2 circuit ID cards; 2 card holders; panelboard and switchboard neutral branch lug assys; 4 #10-32 breaker mounting screws (20 lb-in); 4 #10-24 x 1/2 carriage bolts; 4 #10 lock nuts (20 lb-in); 6 1/4-20 x 3/8 HHWS (72 lb-in); 4 1/4-20 x 1/2 HHWS (72 lb-in); 6 3/8-16 x 1-1/8 SEMS (240 lb-in); 1 'Standard Bus Hardware Kit' strap-to-section (72 lb-in; 18 fasteners, select per card). Strap components differ for 400A vs 600A.	A	S288 pp. 1-4; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S166 p.11-5 (s2); oem_spec
	Requires 6.25 in of unit space (figure dims 2.50 in, 1.87 in, 3.13 in)	A	S288 pp. 1-4; oem_spec
Mounting-hole pattern	B-phase strap: four 1/4-20 screws through strap into B bus; A/C straps four 1/4-20 screws each	A	same as above
Torque values	Breaker stab to strap 3/8-16 x 1-1/8 SEMS 240 lb-in; bus hardware 72 lb-in; single-barrel lug mounting screws 142 lb-in to nutkeeper; double-barrel lug mounting screws 355 lb-in to nutkeeper	A	same as above
OEM instruction document	11-B-1086-01; handle extension per 11-B-1088-01; breaker caution label 11-B-1067-01	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S166 oem_spec
Cross-links	Families: P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00186	S3VA55TD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)

OEM part number	S3VA55TD	A	S166, S289 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA55, 3VA65; 3VA66 branch breaker(s), single mount, 8.75in unit height	A	S166 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S166 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for 3VA66)in	A	S166 p.11-5; oem_spec
Breaker compatibility	3VA55, 3VA65; 3VA66 [s2]	A	S166 p.11-5 (s2); oem_spec
	3VA55 (MMAS, HMAS, CMAS) or 3VA65 (MMAE, HMAE, CMAE) 800A; 3VA66 (MMNAE, HMNAE, CMNAE) 1000A; main or branch; breaker and lugs not included	A	S289 pp. 1-4; oem_spec
Current rating	800/1000A max (table max-amp rating)	A	S166 p.11-5 (s2); oem_spec
Kit contents	2 mounting brackets; 1 barrier; short (A), medium (B) and long (C) straps; cover plate; circuit ID card; card holder; handle extension holder assembly; 4 panelboard + 4 switchboard neutral branch lug assys; provision strap barrier; provision filler; #10-32 thread-forming screw (20 lb-in); 2 #10-24 x 5/8 round head screws; 2 #10 locknuts (30 lb-in); Standard Bus Hardware Kit strap-to-section (72 lb-in); 4 1/4-20 x 3/8 HHWS (40 lb-in); 4 1/4-20 x 1/2 HHWS (72 lb-in); 4 1/4-20 x 1/2 tall hex washer screws (72 lb-in); 6 M10 SEMS screws (275 lb-in; discard the six M10 screws shipped with breaker)	A	S289 pp. 1-4; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S166 p.11-5 (s2); oem_spec
	Requires 8.75 in of unit space; kit can be rotated 180 deg	A	S289 pp. 1-4; oem_spec
Torque values	M10 breaker-to-strap 275 lb-in; M6 x 80 mm breaker OFF-side mounting screws 18 lb-in; shield cover screws 13 lb-in; straps to bus 72 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1097-01 Rev. 00: Distribution Switchboard or P5 Power Panel Strap Mounting Kit S3VA55TD for 800A 3VA55/65 or 1000A 3VA66 Breaker	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S166 oem_spec
Cross-links	Families: P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00187	S3VA57TD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)

OEM part number	S3VA57TD	A	S166, S290 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA57, 3VA67 branch breaker(s), single mount, 10.00in unit height	A	S166 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S166 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S166 p.11-5; oem_spec
Breaker compatibility	3VA57, 3VA67 [s2]	A	S166 p.11-5 (s2); oem_spec
	3VA57 (MNAS, HNAS, CNAS) or 3VA67 (MNAE, HNAE, CNAE) as branch device, 1200 A, 3-ph 3/4-w; breakers and lugs not included	A	S290 pp. 1-4; oem_spec

Current rating	1200A max (table max-amp rating)	A	S166 p.11-5 (s2); oem_spec
Kit contents	Long, medium and short straps; breaker mounting bracket; phase bracket; plastic phase brace; gutter barrier; 4 panelboard + 4 switchboard neutral lug assemblies; filler plate assembly; cover plate; circuit ID card; card holder; handle holder kit; Standard Bus Hardware Kit (select 12 screws per bus laminations; 72 lb-in); 6 5/16-18 x 1-3/8 SEMS (144 lb-in); 6 5/16 narrow washers (critical for creepage); 2 1/4-20 x 3/8 (72); 7 1/4-20 x 1/2 (72); 6 1/4-20 x 5/8 (72); 2 1/4-20 x 3-3/4 (72; replace the four long screws shipped with breaker)	A	S290 pp. 1-4; oem_spec
Dimensions	Unit height 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S166 p.11-5 (s2); oem_spec
	Requires 10 in of unit space; minimum 38 in wide enclosure for lugs up to 600 kcmil, 46 in wide for 750 kcmil lugs or SEM3 applications	A	S290 pp. 1-4; oem_spec
Mounting-hole pattern	Straps land on bus mounting holes, four screws per phase, strap assembly vertically centered in 10 in unit space	A	same as above
Torque values	Breaker to strap 5/16-18 SEMS 144 lb-in; straps to bus 72 lb-in; shield cover screws 11 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1101-01 Rev. 00: Switchboard / P5 Powerpanel Strap Mounting Kit S3VA57TD for a 1,200A 3VA57 or 3VA67 Breaker	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S166 oem_spec
Cross-links	Families: P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00162	**S3VA63TD**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA63TD connecting strap kit - 3VA63 (6.25in, single)

OEM part number	S3VA63TD	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA63 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-110 (s1); oem_spec
Breaker compatibility	3VA63 [s1]	A	same as above
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00169	S3VA64TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA64TD connecting strap kit - 3VA64 (6.25in, single)

OEM part number	S3VA64TD	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA64 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S165 p.11-110 (s1); oem_spec
Breaker compatibility	3VA64 [s1]	A	same as above
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S165 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00180	SCED	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SCED connecting strap kit - CED (3.75in, twin)

OEM part number	SCED	A	S166, S380 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	A	S166 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S166 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
	For use with CED6 frame breakers mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	A	S380 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	CED [s2]	A	S166 p.11-5 (s2); oem_spec
	CED6 frame branch breaker 15-125 A, double mounting; I-T-E type CLE, CLE-A, CED6	A	S380 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	125A max (table max-amp rating)	A	S166 p.11-5 (s2); oem_spec
Kit contents	BOM 11-5068-06: E2-4-6 AC-phase branch bus 11-7140-01 x2; B-phase branch bus 11-7141-01 x1; line connector 11-7138-01 x3; interphase barrier 15-7505-01 x2; mounting bracket 15-B-3016-02 x2; 3.750 cover plate 12-6024-01 x1; circuit ID card 11-7505-01 x2; card holder 11-7506-01 x2; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; strap-bus hardware kit 11-B-2022-05 x1; 10-24 x 5/8 ISHDWHSW 11-1576-07 x12; 8-32 x 4-3/16 SRHSW 11-1510-15 x6; 1/4-20 x 5/8 SHWHSW 11-1553-06 x4; neutral lug assembly 12-B-2105-01 x1; blank filler 12-5531-09 x2	A	S380 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S166 p.11-5 (s2); oem_spec
	Location dims 11-5068-01/-03: A 3.750, B 0.625, C 1.250 in; -02/-04: A 6.250, B 1.875, C 2.500 in	A	S380 single sheet drawing + BOM (scanned image, read visually); oem_spec

Torque values	Item 10: 50 in-lb Al / 72 in-lb Cu; item 11: 30 in-lb Al / 50 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1216-01 Rev. 1: CAT. NO. SCED - CED6 branch breaker mounting S5 copper branch bus (drawing 11-5068-00 Rev 2 / BOM 11-5068-06 Rev 3)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S166 oem_spec
Cross-links	Families: P5, SB · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00160	SCFD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCFD connecting strap kit - Sentron CFD (5.00in, single)

OEM part number	SCFD	A	S165, S376 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CFD branch breaker(s), single mount, 5.00in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
	For use with CFD6 frame breakers mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	A	S376 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron CFD [s1]; CFD [s2]	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	I-T-E type CLF, CFD6 frame branch breaker, 70-250 A, single mounting	A	S376 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	250A max (table max-amp rating)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
	BOM 11-5383-02: breaker support bracket 15-B-3020-02; phase A connector bus 12-7144-01; phase B connector bus 12-7145-01; phase C connector bus 12-7146-01; phase A branch bus 12-7143-01; phase B branch bus 12-7143-02; phase C branch bus 12-7143-03; bus support bracket 12-6257-01; stand-off insulator 11-1800-01 x3; branch bus barrier 11-7715-01; 5 in front plate 12-6029-02; circuit ID card; card holder; 1/4-20 x 3/8 SHWHSW 11-1553-02 x9; strap-bus hardware kit 11-B-2022-05 x2 (+1 item 26); 1/4-20 x 1-7/16 SHWHSW 11-1553-13 x3; 1/4-20 x 4 SRHMS 11-1542-19 x2; neutral lug assembly 12-B-2105-05; blank filler 12-5531-10; 10-24 x 5/8 RHSNB 11-1630-02 x2; 10-24 lock nut 11-1821-02 x2	A	S376 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	5.000 in unit; 1.750 / 1.500 / 1.250 / 1.000 in bus spacings; 0.625 in	A	S376 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Items 16/17: 50 in-lb Al / 72 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1220-01 Rev. 1: CAT. NO. SCFD - CFD6 branch breaker mounting S4/S5 copper bus (drawing 11-5383-00 Rev 5 / BOM 11-5383-02 Rev 8)	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00167	SCJD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCJD connecting strap kit - Sentron CJD (8.75in, single)

OEM part number	SCJD	A	S165, S377 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; SB table gives SSJ1D for SJD) branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
	Deep box SPP/FPP/S5/F2/P5 panelboards (deep box); PC -02 assembly used on strap kit SCJD	A	S377 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; SB table gives SSJ1D for SJD) [s1]; CJD [s2]	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	ITE breaker types CLJ, CJD6, 400 A breaker	A	S377 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	400A max (table max-amp rating)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
	Drawing BOM: mounting bracket 16-6114-01; support bracket 16-6120-02; phase AC jitney 17-6768-02 x2; phase B jitney 17-6769-02; AC long connector 12-6776-05; B connector 12-6776-06; AC short connector 12-6776-04; pad connector 17-6770-02 x3; 1-1/4 in insulator 11-1800-02 x4; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6194-02; circuit ID card 11-7505-01; card holder 11-7506-01; strap-bus hardware kit 11-B-2022-05 x2; 5/12-18 (sic) insert 11-1620-04, 5/16 flat washers 11-1615-06, 5/16 lock washers 11-1618-04 (x12 for -01 Series 5 conversion); 5/16-18 x 1 HHMS 11-1566-05 x6; 5/16-16 x 1-1/4 HHMS 11-1566-07 x6; 1/4 flat/lock washers; 1/4-20 x 1/2 and 7/8 HHMS; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; neutral lug assemblies 12-B-2105-04 / 12-B-2105-06; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; filler plate assembly 12-5531-11; auxiliary mounting bracket 16-6115-01; Series 5 conversion kit 11-5570-02 (-01 only). Column quantities per -01/-02 read from scan - verify	A	S377 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Branch layout 8.75 / 6.88 / 4.38 / 1.88 / 0.00 in; 5.63 / 3.75 / 3.13 / 1.25 in	A	S377 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware (item 16) 72 in-lb; item 29 20 ft-lb; items 20/21 (5/16 HHMS) 12 ft-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1225-01 Rev. 1: CAT. NO. SCJD - drawing 12-5719 Rev 10 'CJD frame mount Series 6 - branch'	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		
Open question	*P5 table pairs both CJD and SJD with SCJD; SB table pairs SJD with SSJ1D - which is correct for SJD in P5?*		

EDH-SIE-00172	SCLD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCLD connecting strap kit - Sentron CLD (8.75in, single)

OEM part number	SCLD	**A**	S165, S379 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CLD branch breaker(s), single mount, 8.75in unit height	**A**	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	**A**	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S166 p.11-5; oem_spec
	Deep box SPP/FPP/S5/F2/P5 panelboards (deep box); PC -02 assembly of drawing 12-5720 used on strap kit SCLD	**A**	S379 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron CLD [s1]; CLD [s2]	**A**	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	ITE breaker types CLL, CLD6, 600 A breaker	**A**	S379 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	600A max (table max-amp rating)	**A**	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S165 p.11-110; oem_spec
	Drawing BOM (same structure as 12-5719/12-5772): mounting bracket 16-6114-01; support bracket 16-6120-02; AC jitney 17-6768-02 x2; B jitney 17-6769-02; AC long connector 12-6776-06; B connector 12-6776-05; AC short connector 12-6776-04; pad connector 17-6770-02 x3; 1-1/4 in insulators 11-1800-02 x4; barriers 11-7721-01, 11-6415-02; cover plate 12-6194-02; strap-bus hardware kit 11-B-2022-05 x2; 5/16-18 inserts, flat and lock washers; 5/16-18 x 1 and x 1-1/4 HHMS; 1/4-20 x 1/2 and 7/8 HHMS; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; neutral lug assemblies 12-B-2105-04 / -06; 3/8-16 x 1 RHSNB 11-1580-02; 3/8-16 Belleville washer nut 11-1622-01; 1/4-20 x 3/8 SHWHSW 11-1553-02; filler plate assembly 12-5531-11; auxiliary mounting bracket 16-6115-01; Series 5 conversion kit 11-5570-02 (-01). Column quantities read from scan - verify	**A**	S379 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	**A**	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Branch layout 8.75 / 6.88 / 4.38 / 1.88 in; 5.63 / 3.75 / 3.13 / 1.25 in	**A**	S379 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Item 16 (strap-bus hardware) 72 in-lb; item 29 20 ft-lb; items 20/21 12 ft-lb	**A**	same as above
OEM instruction document	Siemens instruction sheet 31-1229-01 Rev. 2: CAT. NO. SCLD - drawing 12-5720 Rev 11 'CLD frame mount Series 6 - branch' (-01 = 6CLL1, -02 = SCLD)	**A**	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S165, S166 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00154	SE6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SE6D connecting strap kit - ED (3.75in, twin)

OEM part number	SE6D	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for ED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
Breaker compatibility	ED [s1]; ED [s2]	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Aftermarket / reproduction	Breaker King offers BEDITE (kit # ED65K) as a replacement ('Kit # ED65K replaces OEM 6E62 and SE6D'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Cross-links	Families: P5, SB, CDP6 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00159	SF6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SF6D connecting strap kit - Sentron FD (5.00in, twin)

OEM part number	SF6D	A	S165, S375 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron FD branch breaker(s), twin mount, 5.00in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
	For use with FXD6, FD6 and HFD6 frame breakers mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	A	S375 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron FD [s1]; FD [s2]	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	FD6 frame twin mounted 70-250 A: FXD6, FD6, HFD6	A	S375 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	250A max (table max-amp rating)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec

	BOM 11-5098-03: F6 phase AC front branch bus 12-7031-01 x2; AC rear 12-7032-01 x2; phase B branch bus 12-7033-01 x1; phase B heat sink 11-6846-01 x2; F6 mounting bracket 15-B-3018-02 x2; 5 in F6 cover plate 12-6028-01; circuit ID card 11-7505-01 x2; card holder 11-7506-01 x2; 1/4-20 x 3/8 SHWHSW 11-1553-02 x4; strap-bus hardware kit 11-B-2023-05 (use 11-B-2022-05 for B-phase); 8-32 x 5/8 IHWHSW 11-1512-07 x4; 1/4-20 x 1 SHWHSW 11-1553-09 x6; 1/4-20 x 4 SRHMS 11-1542-19 x4; 1/4-20 x 5/8 SHWHSW 11-1553-06 x2; blank filler 12-5531-10 x2; neutral lug assembly 12-B-2105-07 x2; phase B barrier (provisions) 11-7548-02 x4	A	S375 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	5.00 in unit; 3.75, 1.25, 0.63 in	A	S375 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware 50 in-lb Al / 72 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1218-01 Rev. 2: CAT. NO. SF6D - FD6 frame mounting S4/S5 copper branch bus (drawing 11-5098-00 Rev 6 / BOM 11-5098-03 Rev 9)	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Aftermarket / reproduction	Breaker King offers BFDITE (kit # FD65K) as a replacement ('Kit # FD65K replaces OEM 6F62 and SF6D'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Identification features	Same branch-bus drawing family as Series 6 kit 6F62 (11-5098); items 3, 4 & 11 sub-assembled before packing	A	S375 single sheet drawing + BOM (scanned image, read visually); oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00165	SJ1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ1D connecting strap kit - Sentron JD (8.75in, single)

OEM part number	SJ1D	A	S165, S364 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S364 pp. 2-4 (image); oem_spec
Breaker compatibility	Sentron JD [s1]; JD [s2]	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S364 pp. 2-4 (image); oem_spec
Current rating	400A max (table max-amp rating)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S364 pp. 2-4 (image); oem_spec

Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S364 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Aftermarket / reproduction	Breaker King offers BJDSGLITE (kit # JDS65K) as a replacement ('Kit # JDS65K replaces OEM 6JJ61 and SJ1D'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00166	**SJ2D**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ2D connecting strap kit - Sentron JD (8.75in, twin)

OEM part number	SJ2D	A	S165, S287, S480 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), twin mount, 8.75in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
	Twin-mount JD frame branch kit for JXD2, JXD6, JD6 and HJD6 breakers in SPP/FPP/S5/F2/P5 (deep box); drawing also used (pc -01) for strap kit 6JJ62	A	S480 p.1 (drawing 12-5721 pc. -02); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	branch	A	S480 p.1 (drawing 12-5721 pc. -02); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S166 p.11-5; oem_spec
	Strap kit SJ2D (deep box P5 / SPP/FPP/S5/F2) uses PC -02 assembly of drawing 12-5721	A	S287 drawing 12-5721 Rev 11 (image, read visually); oem_spec
Breaker compatibility	Sentron JD [s1]; JD [s2]	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	ITE breaker types JD2, JJ6, JL6, HJ6, HJD6, JXD2, JXD6, JD6, HHJD6 (400 A)	A	S287 drawing 12-5721 Rev 11 (image, read visually); oem_spec
	JXD2, JXD6, JD6, HJD6 (drawing lists ITE JD2, JJ6, JL6, HJ6, JXD2, JXD6, JD6, HJD6, HHJD6); 400 A breaker	A	S480 p.1 (drawing 12-5721 pc. -02); oem_spec
Current rating	400A max (table max-amp rating)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec

	Mounting bracket 11-6398-01 x2; phase AC branch bus 16-6974-01 x2; phase B branch bus 16-6949-02 x1; 5/16-18 x 1-1/4 HHMS 11-1566-07 x6; 5/16 lock washer 11-1618-04 x6; 5/16 flat washer 11-1615-06 x6; 5/16-18 insert 11-1620-04 x6; front plate 12-6139-01; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; strap-bus hardware kit 11-B-2022-05 x2; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; filler plate assembly 12-5531-11; circuit ID card 11-7505-01 x2; card holder 11-7506-01 x2; (-02/SJ2D column only) 1/4-20 x 5/8 HHMS 11-1546-03 x4 with 1/4 lock and flat washers, instruction sheet 31-1223-01; 3/8-16 x 1 RHSNB 11-1580-02 and 3/8-16 Belleville washer nut 11-1622-01 listed (quantities not legible); (-01/6JJ62 column only) Series 5 conversion kit 11-5570-02 and instruction sheet 31-1169-01; neutral lug assembly 12-B-2105-04 (6JJ62) / 12-B-2105-06 (SJ2D). Column assignment read from a scanned drawing - verify	A	S287 drawing 12-5721 Rev 11 (image, read visually); oem_spec
	-02 column: 2 mounting bracket 11-6398-01; 2 phAC branch bus 16-6974-01; 1 phB branch bus 16-6949-02; 6 5/16-18x1-1/4 HHMS 11-1566-07; 6 5/16 lock washer 11-1618-04; 6 5/16 flat washer 11-1615-06; 6 5/16-18 insert 11-1620-04; 1 front plate 12-6139-01; 6 1/4-20x3/8 SHWHSW 11-1553-02; 2 strap-bus hardware kit 11-B-2022-05; 4 1/4-20x2-3/4 SRHMS 11-1542-14; 1 filler plate assembly 12-5531-11; instruction 31-1223-01; carton label 15-A-1027-01; 2 circuit ID card 11-7505-01; 2 card holder 11-7506-01; 4 1/4-20x5/8 HHMS 11-1546-03; 4 1/4 lock washer 11-1618-03; 4 1/4 flat washer 11-1615-04; carton 48001057; 1 neutral lug assembly 12-B-2105-06	A	S480 p.1 (drawing 12-5721 pc. -02); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Branch bus layout 3.75 / 8.75 / 3.13 in	A	S287 drawing 12-5721 Rev 11 (image, read visually); oem_spec
	8.75in unit; bracket holes 3.75in from top and bottom, 3.13in	A	S480 p.1 (drawing 12-5721 pc. -02); oem_spec
Torque values	Item 4 (5/16-18 x 1-1/4 HHMS) 12 ft-lb; item 10 strap-bus hardware 72 in-lb; Series 5 adaptor 5/16-18 bolts 13 ft-lb	A	S287 drawing 12-5721 Rev 11 (image, read visually); oem_spec
	Item 4 (5/16-18x1-1/4 HHMS) 12 ft-lb; item 10 (strap-bus hardware) 72 in-lb	A	S480 p.1 (drawing 12-5721 pc. -02); oem_spec
OEM instruction document	Siemens instruction sheet 31-1169-01 Rev. 3: CAT. NO. 6JJ62 instruction sheet with drawing 12-5721 Rev 11 'JD Frame Twin Mounting Series 6 Branch' (-01 = 6JJ62, -02 = SJ2D) and Series 5 adaptor kit 11-5570-02	A	S287 drawing 12-5721 Rev 11 (image, read visually); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Aftermarket / reproduction	Breaker King offers BJDITE (kit # JD65K) as a replacement ('Kit # JD65K replaces OEM 6JJ62 and SJ2D'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00163	SJG2D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG2D connecting strap kit - VL JG (6.25in, twin)

OEM part number	SJG2D	A	S165, S275, S589 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), twin mount, 6.25in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S165 p.11-110 (s1); oem_spec
	branch, twin mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec

Installation location	Switchboard (SB1, SB2, SB3) or deep panelboard (P5)	A	S275 pp. 1-4; oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	VL JG [s1]	A	S165 p.11-110 (s1); oem_spec
	Siemens VL JG frame electronic-trip breakers	A	S275 pp. 1-4; oem_spec
	VL JG (max 250 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	400A max (table max-amp rating)	A	S165 p.11-110 (s1); oem_spec
	250 A max	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S165, S589 p.11-110 (s1); oem_spec
	Requires 6.25 in of unit space; straps 1.75 in vertically between centers	A	S275 pp. 1-4; oem_spec
Mounting-hole pattern	B strap two 0.228 in holes in B-phase bus 5.00 in down from top of 6.25 in unit space; A straps 1-1/4 in down; C straps 5.00 in down; B link half-punch into 0.218 in hole of B strap, 5/16-18 screw through 0.375 in link hole into 0.281 in strap hole; breaker line contacts 5/16-18 into 0.281 in strap holes; mounting brackets on 0.228 in Z-rail holes 1.875 in down; breaker load end 1/4-20 x 3-3/4 into 0.228 in bracket holes	A	same as above
Torque values	5/16-18 connections per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1026-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P5) SJG2D for Branch Mounting Type VL JG Frame Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S165 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00171	SL6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SL6D connecting strap kit - Sentron LD (8.75in, single)

OEM part number	SL6D	A	S165, S364 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S364 pp. 2-4 (image); oem_spec
Breaker compatibility	Sentron LD [s1]; LD [s2]	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec

	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S364 pp. 2-4 (image); oem_spec
Current rating	600A max (table max-amp rating)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S364 pp. 2-4 (image); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S364 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Aftermarket / reproduction	Breaker King offers BLDITE (kit # LD65K) as a replacement ('Kit # LD65K replaces OEM 6LL61 and SL6D'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00177	SMND	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)

OEM part number	SMND	A	S165, S493, S589 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron MD, CMD; ND branch breaker(s), single mount, 10.00in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
	Branch mounting kit for Siemens MD/ND breakers in switchboards or deep panelboards; 10in unit space; 3-ph 3W/4W	A	S493 pp.1-4; oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	branch	A	S493 pp.1-4; oem_spec
	branch, single mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for ND)in	A	S166 p.11-5; oem_spec

	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	Sentron MD, CMD; ND [s1]; MD, CMD; ND [s2]; MD6, HMD6, CMD6 [s3]; ND6, HND6, CND6 [s3]	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	MD, ND frame	A	S493 pp.1-4; oem_spec
	Sentron MD (max 800 A); Sentron ND (max 1200 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	800/1200A max (table max-amp rating)	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	800 A max; 1200 A max	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S165, S167 p.11-110 | p.8-13; oem_spec
	1 MD/ND breaker installation instr.; 4 branch neutral lug assy; 1 long, 1 medium, 1 short phase connector; 1 strap-section bus hardware kit; 1 phase bracket; 1 phase brace; 1 breaker mount; 1 branch brkr cover panel; 1 card holder; 1 circuit ID card; 2 1/4-20x3/8 SHWHSW; 7 1/4-20x1/2 SHWHSW; 6 1/4-20x5/8 SHWHSW; 6 5/16 washer; 6 5/16-18x1-3/8 HHWSW SEMS; 2 1/4-20x1-1/2 SHWHSW; 1 packaging assembly; 1 handle holder kit - M/N breakers; 1 gutter barrier	A	S493 pp.1-4; oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper straps	A	S167 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	10.00in unit space; connector positions 1.25, 5.00, 7.50in / 3.13, 6.88in	A	S493 pp.1-4; oem_spec
	Unit height 10 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Mounting-hole pattern	Phase bracket at 0.228 Z-rail holes 3-1/8in down from top and up from bottom of 10in unit space (1/4-20x1/2 via 0.312 holes); phase connectors four 1/4-20 thread-forming each via 0.312 into 0.228 bus holes; breaker line: two 5/16-18x1-3/8 thread-forming per contact into 0.284 holes; load: two 1/4-20 thread-forming via 0.69 holes into 0.228 holes in breaker mount	A	S493 pp.1-4; oem_spec
Torque values	Per rear of deadfront label	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S165, S166, S167 oem_spec
Aftermarket / reproduction	Breaker King offers BMDITE (kit # ND65K) as a replacement ('Replaces OEM SMND'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Identification features	2005 list price $3489.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Finish / plating, OEM instruction document		

EDH-SIE-00469	SQJD	Siemens	branch-connector-kit	STATUS UNKNOWN

QJ breaker branch mounting kit (switchboards or deep panelboards)

OEM part number	SQJD	A	S492, S628 pp.1-4; oem_spec
Description	Branch mounting kit for Siemens QJ breakers in switchboards or deep panelboards; 5in unit space; 3-ph 3W or 4W (document covers SQJD/6QJ2/SQJ)	A	S492 pp.1-4; oem_spec
Application	branch	A	same as above
Installation location	Branch neutral lugs at bottom (or top) of Z-rails; two neutral lug assembly types supplied (panelboard vs switchboard)	A	same as above
Breaker compatibility	QJ (QJ2 family)	A	same as above
Kit contents	1 installation instructions; 2 A/C strap; 1 B strap; 1 strap-section bus hardware kit; 2 A/C link bar; 1 B link bar; 2 QJ mounting bracket; 1 5in QJ cover plate; 2 card holder; 1 circuit ID card; 2 neutral lug ass'y; 6 1/4-20x3/8 screw; 12 1/4-20x5/8 screw; 4 1/4-20x2-3/4 screw; box; carton label	A	same as above
Dimensions	5.00in unit space; 1.25, 2.50, 1.50in	A	same as above
Mounting-hole pattern	B strap 1-1/4in below top of 5.0in unit space, two 1/4-20 thread-forming into 0.228 holes; C strap 2.50in below A/B screws; QJ bracket at 0.228 Z-rail hole 5/8in below A-strap screws via 0.312 bracket holes; link bars 0.281 holes, 1.50in between centres; breaker line: 1/4-20x5/8 into each contact; load: two 1/4-20x2-3/4 thread-forming into bracket 0.228 holes	A	same as above
Torque values	Per label on rear of deadfront (not printed on sheet)	A	same as above
Aftermarket / reproduction	Breaker King offers BQJITE (kit # QJ65K) as a replacement ('Kit # QJ65K replaces OEM 6QJ2 and SQJD'), labelled 'SIEMENS/I-T-E Aftermarket Repl' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Cross-links	Families: P5, SB · Breakers: QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Material, Status		
Open question	*Sheet is common to SQJD/6QJ2/SQJ; the item list may differ per variant (shallow kit shown only as reference).*		

EDH-SIE-00184	SSCJD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SSCJD connecting strap kit - SCJD (8.75in, single)

OEM part number	SSCJD	A	S166, S479 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD branch breaker(s), single mount, 8.75in unit height	A	S166 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
	Branch mounting kit for ITE SCJD6 (400 A) breakers in SPP/FPP/S5/F2/P5 panelboards (deep box)	A	S479 p.1 (drawing 12-5771 pc. -02); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S166 p.11-5 (s2); oem_spec
	branch	A	S479 p.1 (drawing 12-5771 pc. -02); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
Breaker compatibility	SCJD [s2]	A	S166 p.11-5 (s2); oem_spec
	SCJD6	A	S479 p.1 (drawing 12-5771 pc. -02); oem_spec
Current rating	400A max (table max-amp rating)	A	S166 p.11-5 (s2); oem_spec

Kit contents	Drawing 12-5771 -02 assembly: 1 mounting bracket 16-6114-01; 1 support bracket 16-6120-02; 2 phAC jitney 17-6768-02; 1 phB jitney 17-6769-02; 1 phAC long connector 12-6776-06; 1 phB connector 12-6776-05; 1 phAC short connector 12-6776-04; 3 pad connector 17-6770-02; 4 1-1/4in insulator 11-1800-02; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6487-01; circuit ID card 11-7505-01; card holder 11-7506-01; 2 strap-bus hardware kit 11-B-2022-05; 12 5/16-18 insert 11-1620-04; 12 5/16 flat washer 11-1615-06; 12 5/16 lock washer 11-1618-04; 6 5/16-18x1 HHMS 11-1566-05; 6 5/16-18x1-1/4 HHMS 11-1566-07; 6 1/4 flat washer 11-1615-04; 8 1/4 lock washer 11-1618-03; 4 1/4-20x1/2 HHMS 11-1546-02; 4 1/4-20x7/8 HHMS 11-1546-05; 4 1/4-20x2-3/4 SRHMS 11-1542-14; 6 1/4-20x3/8 SHWHSW 11-1553-02; 1 filler plate assembly 12-5531-11; 1 auxiliary mounting bracket 16-6115-01; neutral lug assembly 12-B-2105-06; instruction sheet 31-1226-01; carton label 15-A-1027-01; carton 48001057	A	S479 p.1 (drawing 12-5771 pc. -02); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S166 p.11-5 (s2); oem_spec
	Connector heights 0.00, 1.88, 4.38, 6.88, 8.75in (8.75in unit); bracket holes 1.25, 3.13, 3.75, 5.63in	A	S479 p.1 (drawing 12-5771 pc. -02); oem_spec
Torque values	Strap-bus hardware (item 16) 72 in-lb; item 29 (3/8-16 RHSNB) 20 ft-lb; items 20/21 (5/16-18 HHMS) 12 ft-lb; Series 5 adaptor 13 ft-lb	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S166 oem_spec
Cross-links	Families: P5, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SIE-00174 SSCLD Siemens branch-connector-kit LISTED IN SPEEDFAX 202

SSCLD connecting strap kit - Sentron SCLD (8.75in, single)

OEM part number	SSCLD	A	S165, S378 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCLD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
	Deep box SPP/FPP/S5/F2/P5 panelboards (deep box); PC -02 assembly used on strap kit SSCLD	A	S378 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron SCLD [s1]; SCLD [s2]	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	ITE breaker types SCLD6, 600 A breaker	A	S378 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	600A max (table max-amp rating)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec

	Drawing BOM: mounting bracket 16-6114-01; support bracket 16-6120-02; phase AC jitney 17-6768-02 x2; phase B jitney 17-6769-02; AC long connector 12-6776-05; B connector 12-6776-06; AC short connector 12-6776-04; pad connector 17-6770-02 x3; 1-1/4 in insulator 11-1800-02 x4; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6487-01; circuit ID card 11-7505-01; card holder 11-7506-01; strap-bus hardware kit 11-B-2022-05 x2; 5/12-18 (sic) insert 11-1620-04, 5/16 flat washers 11-1615-06, 5/16 lock washers 11-1618-04 (x12 for -01 Series 5 conversion); 5/16-18 x 1 HHMS 11-1566-05 x6; 5/16-16 x 1-1/4 HHMS 11-1566-07 x6; 1/4 flat/lock washers; 1/4-20 x 1/2 and 7/8 HHMS; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; neutral lug assemblies 12-B-2105-04 / 12-B-2105-06; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; filler plate assembly 12-5531-11; auxiliary mounting bracket 16-6115-01; Series 5 conversion kit 11-5570-02 (-01 only); 3/8-16 x 1 RHSNB 11-1580-02 and 3/8-16 Belleville washer nut 11-1622-01. Column quantities per -01/-02 read from scan - verify	A	S378 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Branch layout 8.75 / 6.88 / 4.38 / 1.88 / 0.00 in; 5.63 / 3.75 / 3.13 / 1.25 in	A	S378 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware (item 16) 72 in-lb; item 29 20 ft-lb; items 20/21 (5/16 HHMS) 12 ft-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1230-01 Rev. 1: CAT. NO. SSCLD - drawing 12-5772 Rev 8 'SCLD frame mount Series 6 - branch'	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00183	**SSJ1D**	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SSJ1D connecting strap kit - SJD (8.75in, single)

OEM part number	SSJ1D	A	S166, S364 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for SJD branch breaker(s), single mount, 8.75in unit height	A	S166 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S166 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S364 pp. 2-4 (image); oem_spec
Breaker compatibility	SJD [s2]	A	S166 p.11-5 (s2); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S364 pp. 2-4 (image); oem_spec
Current rating	400A max (table max-amp rating)	A	S166 p.11-5 (s2); oem_spec
Kit contents	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S364 pp. 2-4 (image); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S166 p.11-5 (s2); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S364 pp. 2-4 (image); oem_spec

Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S166 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00173	**SSL6D**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSL6D connecting strap kit - Sentron SLD (8.75in, single)

OEM part number	SSL6D	A	S165, S364 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SLD branch breaker(s), single mount, 8.75in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S166 p.11-5; oem_spec
	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S364 pp. 2-4 (image); oem_spec
Breaker compatibility	Sentron SLD [s1]; SLD [s2]	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S364 pp. 2-4 (image); oem_spec
Current rating	600A max (table max-amp rating)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S165 p.11-110; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S364 pp. 2-4 (image); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S364 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above

Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S165, S166 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00178	**SSMND**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)

OEM part number	SSMND	A	S165, S589 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SMD; SND branch breaker(s), single mount, 10.00in unit height	A	S165 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	branch, single mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for SND)in	A	S166 p.11-5; oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	Sentron SMD; SND [s1]; SMD; SND [s2]; SMD6, SHMD6, SCMD6 [s3]; SND6, SHND6, SCND6 [s3]	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	Sentron SMD (max 800 A); Sentron SND (max 1200 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	800/1200A max (table max-amp rating)	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	800 A max; 1200 A max	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S165, S167 p.11-110 | p.8-13; oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper straps	A	S167 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S165, S166, S167 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	Unit height 10 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec

Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S165, S166, S167 oem_spec
Identification features	2005 list price $3489.00	A	S167 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00495	**CS3637R**	MD/ND frame panelboard connector strap (OEM panel builder)	MD6, ND6, HMD6, HND6, CMD6, CND6, SMD6, SND6, SHMD6, SHND6, SCMD6, SCN A	unknown
EDH-SIE-00496	**CS3638R**	MD/ND frame panelboard connector strap (OEM panel builder)	MD6, ND6, HMD6, HND6, CMD6, CND6, SMD6, SND6, SHMD6, SHND6, SCMD6, SCN A	unknown
EDH-SIE-00497	**CS3639R**	MD/ND frame panelboard connector strap (OEM panel builder)	MD6, ND6, HMD6, HND6, CMD6, CND6, SMD6, SND6, SHMD6, SHND6, SCMD6, SCN A	unknown

EDH-SIE-00495 **CS3637R** Siemens connector-strap **STATUS UNKNOWN**

MD/ND frame panelboard connector strap (OEM panel builder)

OEM part number	CS3637R	A	S526 pp.1-3, Fig. 1-3; oem_spec
Description	Connector strap for panelboard builders: electrical interface between line or load terminals of 2/3-pole MD/ND breakers and panelboard power bus; used in selected combinations; fasteners NOT supplied; straps alone do not support breaker	A	same as above
Application	main or branch (Fig. shows 'Power panelboard MD/ND main')	A	same as above
Breaker compatibility	MD6, ND6, HMD6, HND6, CMD6, CND6, SMD6, SND6, SHMD6, SHND6, SCMD6, SCND6; MCIs MD6ETI, ND6ETI, CMD6ETI; switches MXD6, NXD6	A	same as above
Dimensions	DIM X = 3.03in, DIM Y = 5.25in (Fig. 2); 1.500in typ pole pitch, 3.000in; 16.00in, 9.00in, 3.50in, 6.750in min, 2.25, .75, 1.810, 1.281, 1.437, 2.41in; breaker outline 14.25in	A	same as above
Mounting-hole pattern	5/16-18 UNC tapped hole x .81 deep at breaker end; positioning template per line A Fig. 3 (3.000in spacing); two 5/16-18 bolts per strap to template	A	same as above
Fasteners	Not supplied - installer provides per panelboard specifications	A	same as above
Cross-links	Families: P5 · Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Kit contents, Material, Status, Torque values		

EDH-SIE-00496 **CS3638R** Siemens connector-strap **STATUS UNKNOWN**

MD/ND frame panelboard connector strap (OEM panel builder)

OEM part number	CS3638R	A	S526 pp.1-3, Fig. 1-3; oem_spec
Description	Connector strap for panelboard builders: electrical interface between line or load terminals of 2/3-pole MD/ND breakers and panelboard power bus; used in selected combinations; fasteners NOT supplied; straps alone do not support breaker	A	same as above
Application	main or branch (Fig. shows 'Power panelboard MD/ND main')	A	same as above
Breaker compatibility	MD6, ND6, HMD6, HND6, CMD6, CND6, SMD6, SND6, SHMD6, SHND6, SCMD6, SCND6; MCIs MD6ETI, ND6ETI, CMD6ETI; switches MXD6, NXD6	A	same as above
Dimensions	DIM X = 6.53in, DIM Y = 8.75in (Fig. 2); 1.500in typ pole pitch, 3.000in; 16.00in, 9.00in, 3.50in, 6.750in min, 2.25, .75, 1.810, 1.281, 1.437, 2.41in; breaker outline 14.25in	A	same as above
Mounting-hole pattern	5/16-18 UNC tapped hole x .81 deep at breaker end; positioning template per line A Fig. 3 (3.000in spacing); two 5/16-18 bolts per strap to template	A	same as above
Fasteners	Not supplied - installer provides per panelboard specifications	A	same as above
Cross-links	Families: P5 · Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Kit contents, Material, Status, Torque values		

EDH-SIE-00497	CS3639R	Siemens	connector-strap	STATUS UNKNOWN

MD/ND frame panelboard connector strap (OEM panel builder)

OEM part number	CS3639R	A	S526 pp.1-3, Fig. 1-3; oem_spec
Description	Connector strap for panelboard builders: electrical interface between line or load terminals of 2/3-pole MD/ND breakers and panelboard power bus; used in selected combinations; fasteners NOT supplied; straps alone do not support breaker	A	same as above
Application	main or branch (Fig. shows 'Power panelboard MD/ND main')	A	same as above
Breaker compatibility	MD6, ND6, HMD6, HND6, CMD6, CND6, SMD6, SND6, SHMD6, SHND6, SCMD6, SCND6; MCIs MD6ETI, ND6ETI, CMD6ETI; switches MXD6, NXD6	A	same as above
Dimensions	DIM X = 10.03in, DIM Y = 12.25in (Fig. 2); 1.500in typ pole pitch, 3.000in; 16.00in, 9.00in, 3.50in, 6.750in min, 2.25, .75, 1.810, 1.281, 1.437, 2.41in; breaker outline 14.25in	A	same as above
Mounting-hole pattern	5/16-18 UNC tapped hole x .81 deep at breaker end; positioning template per line A Fig. 3 (3.000in spacing); two 5/16-18 bolts per strap to template	A	same as above
Fasteners	Not supplied - installer provides per panelboard specifications	A	same as above
Cross-links	Families: P5 · Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Kit contents, Material, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00220	**SEBP5V1**	Service entrance barrier for (S)MD, (S)ND without shield	Horizontally-mounted MD, ND or NG main in P5, without lug shield A	unknown
EDH-SIE-00221	**SEBP5V2**	Service entrance barrier for (S)MD, (S)ND with shield	Horizontally-mounted MD, ND or NG main in P5, with lug shield A	unknown
EDH-SIE-00222	**SEBP5V3**	Service entrance barrier for Vacu-Break switches	200A or 400A Siemens Vacu-Break main switch in P5 A	unknown
EDH-SIE-00223	**SEBP5V4**	Service entrance barrier for HCP switches	HCP main switch in P5 A	unknown
EDH-SIE-00376	**SEBPPVA2**	P5 service entrance barrier kit - horizontal 3VA55/3VA65/3VA66	Horizontally-mounted 3VA55, 3VA65 or 3VA66 in P5 A	unknown

EDH-SIE-00220	SEBP5V1	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for (S)MD, (S)ND without shield

OEM part number	SEBP5V1	A	S165, S337 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)MD, (S)ND without shield	A	S165 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S337 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted MD, ND or NG main in P5, without lug shield	A	same as above
Kit contents	2 barrier support brackets; 2 1/4-20 x 5/8 SHWHSW; 1 barrier assembly; 2 removable screw-type rivets	A	same as above
Torque values	30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1160-01 Rev. 00: SEBP5V1 / SEBP5V2 Service Entrance Barrier Kit for P5	A	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00221	SEBP5V2	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for (S)MD, (S)ND with shield

OEM part number	SEBP5V2	A	S165, S337 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)MD, (S)ND with shield	A	S165 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S337 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted MD, ND or NG main in P5, with lug shield	A	same as above
Kit contents	2 barrier support brackets; 2 1/4-20 x 5/8 SHWHSW; 1 barrier assembly; 2 removable rivets	A	same as above
Torque values	30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1160-01 Rev. 00: SEBP5V1 / SEBP5V2 Service Entrance Barrier Kit for P5	A	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00222	SEBP5V3	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for Vacu-Break switches

OEM part number	SEBP5V3	A	S165, S338 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for Vacu-Break switches	A	S165 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S338 single sheet; oem_spec
Breaker compatibility	200A or 400A Siemens Vacu-Break main switch in P5	A	same as above
Kit contents	1 barrier support bracket; 2 1/4-20 x 3/8 SHWHSW; 1 barrier assembly; 2 #10-32 x 3/8 HWHSW; auxiliary barrier(s) 1 (200A) / 2 (400A); side barrier hardware 4 (200A) / 2 (400A)	A	same as above
Dimensions	Bracket on base rail X from nearest end: X = 5.63 in (200A), 4.38 in (400A)	A	same as above
Torque values	Bracket 1/4-20 30 lb-in; #10-32 20 lb-in; 400A auxiliary barrier 1/4-20 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1163-01 Rev. 00: SEBP5V3 Service Entrance Barrier Kit for P5 (Vacu-Break main switch)	A	same as above
Cross-links	Families: P5		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00223	SEBP5V4	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for HCP switches

OEM part number	SEBP5V4	A	S165, S339 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for HCP switches	A	S165 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S339 single sheet; oem_spec
Breaker compatibility	HCP main switch in P5	A	same as above
Kit contents	2 barrier support brackets; 2 1/4-20 x 5/8 SHWHSW; 1 barrier assembly; 2 removable screw-type rivets	A	same as above
Torque values	30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1164-01 Rev. 00: SEBP5V4 Service Entrance Barrier Kit for P5 (HCP main)	A	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00376	SEBPPVA2	Siemens lineage	barrier	STATUS UNKNOWN

P5 service entrance barrier kit - horizontal 3VA55/3VA65/3VA66

OEM part number	SEBPPVA2	**A**	S341 single sheet; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	**A**	same as above
Breaker compatibility	Horizontally-mounted 3VA55, 3VA65 or 3VA66 in P5	**A**	same as above
Kit contents	1 service barrier assembly; 1 barrier mounting bracket; 2 #10-32 x 3/8 thread-forming screws; 2 #10-32 x 5/16 SEMS screws	**A**	same as above
Torque values	All #10-32 30 lb-in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1095-01 Rev. 00: SEBPPVA2 Service Entrance Barrier Kit for 3VA55, 3VA65 or 3VA66 Breaker in a P5 Panelboard	**A**	same as above
Cross-links	Families: P5		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00363	**P53RCONVKIT**	P5 power panel Type 1 to Type 3R/12 enclosure interior conversion kit	—	unknown

EDH-SIE-00363	P53RCONVKIT	Siemens lineage	conversion-kit	STATUS UNKNOWN

P5 power panel Type 1 to Type 3R/12 enclosure interior conversion kit

OEM part number	P53RCONVKIT	**A**	S295 pp. 2-4; oem_spec
Description	Required to modify P5 interior for mounting in a Type 3R/12 enclosure (four L-shaped brackets attached to sides of interior with supplied hardware)	**A**	same as above
Application	P5 32 in / 38 in wide power panels (e.g. P5X60MC120EH32, P5X75MC120EH32, P5X90MC120EH32, P5X90MC120EH); interior designed for 3-ph 4-w density-rated bus, 208Y/120 or 480Y/277 dual rated	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-D-1013-01 Rev. 00: Installation Instructions - general use of Siemens P5 32in or 38in wide Power Panel (P5X60MC120EH32, P5X75MC120EH32, P5X90MC120EH32, P5X90MC120EH)	**A**	same as above
Cross-links	Families: P5		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00466	**F6150D**	Vacu-Break 15in single unit (400/600A) mounting kit, SPP/FPP/S5/F2/P5 deep box	Fusible switch cat. nos. V7H2205, V7H2206, V7H3205, C7H3206, V7H3206, **A**	unknown
EDH-SIE-00467	**F6162D**	800/1200A Sentron HCP switch branch mounting (connection strap) kit	—	unknown
EDH-SIE-00465	**F672D**	Twin 200A Vacu-Break mounting kit, type F2 / 12.75in deep FPP	—	unknown

EDH-SIE-00466	F6150D	Siemens	switch-unit	STATUS UNKNOWN

Vacu-Break 15in single unit (400/600A) mounting kit, SPP/FPP/S5/F2/P5 deep box

OEM part number	F6150D	A	S488 p.1 (drawing 11-B-2007-00, BOM 11-B-2007-02); oem_spec
Description	F2 branch bus kit for 15in high single Vacu-Break units (400 A, 600 A) in SPP/FPP/S5/F2/P5 panelboards (deep box)	A	same as above
Application	branch	A	same as above
Breaker compatibility	Fusible switch cat. nos. V7H2205, V7H2206, V7H3205, C7H3206, V7H3206, V7H2605, V7H2606, C7H3605, V7H3606	A	same as above
Kit contents	1 fusible switch (cat. no. per list); 6 1/4-20x1-1/4 SHWHSW 11-1553-11; 2 neutral lug assembly 12-B-2105-06; instruction label 31-1243-01; carton label 15-A-1027-01; carton 48000989	A	same as above
Dimensions	17.000in high (16.000 mounting rail), 15.000in wide, 10.500in deep; .625 edges; .375 dia holes; insert locations 6 places (1.25 / 3.75 / 2.5in pitch)	A	same as above
Torque values	Alum 50 in-lb; Copper 72 in-lb; fasten switch to Z-rail with captive 1/4-20 screws	A	same as above
Cross-links	Families: P5		
Not yet documented	Mounting-hole pattern, Material, Status		

EDH-SIE-00467	F6162D	Siemens	switch-unit	STATUS UNKNOWN

800/1200A Sentron HCP switch branch mounting (connection strap) kit

OEM part number	F6162D	A	S489, S490, S589 12-B-2108-01 pp.2-3; F6162_old drawing; oem_spec
Description	Panel kit for Sentron HCP fusible switch rated 800 and 1200 A as a branch in Type S5, CDP6, SPP panelboard or FCI, FCII, SB1, SB2, SB3 switchboard distribution sections; switch not included	A	S489, S490 12-B-2108-01 pp.2-3; F6162_old drawing; oem_spec
Application	branch; requires 16.25in clear continuous space	A	same as above
Installation location	Ground strap (item 19) from connector support to switch enclosure with #10-32 screws; horizontal mount, right exit shown (rotate 180 for left exit)	A	same as above
	SB1, SB2, SB3, FC20, FCI, FCII, VB-5 & VB-6 switchboards (manufactured since 1974)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	800-1200	A	same as above
Kit contents	1 mtg bracket; 1 mtg bracket; 1 insulation; 2 long connector; 2 middle connector; 2 short connector; 3 1-3/8in insulator; 3 3/8-16x3/4 HHMS; 3 3/8 lockwasher; 3 3/8 flat washer; 3 3/8-16x3/4 round head sq. neck bolt; 2 strap bus hardware kit; 4 1/4-28(sic)x3/8 SHWHSW; 6 5/16-18 threaded insert; 6 5/16-18x1 slotted RHMS; 6 5/16 lockwasher; 6 5/16 flat washer; 2 1/4-20x1 slotted RHMS; 1 ground strap assembly; 2 10-32x1/4 HWH machine screw	A	S489, S490 12-B-2108-01 pp.2-3; F6162_old drawing; oem_spec
	Straps, cover plates and necessary hardware	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	Connector/bracket positions from 0.00 datum: 1.25, 4.38, 5.63, 7.50, 10.63, 11.88, 13.75, 16.25in. Horizontal-mount drawing: 15.00in line/load, 17.00/17.22in width, 2x 3/8-16 tapped holes, 2x .34 thru, 5x .228 through, 2.70in max available terminal surface, 13.00in filler plate	A	S489, S490 12-B-2108-01 pp.2-3; F6162_old drawing; oem_spec
	Unit height 16.25 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Mounting-hole pattern	Threaded inserts tapped into underside of connectors; supports to Z-rail with two 1/4-20x3/8 HWH thread-forming; connector screws vary with number of bus laminations	A	S489, S490 12-B-2108-01 pp.2-3; F6162_old drawing; oem_spec
Torque values	Per values marked on product / deadfront label (no values printed)	A	same as above
Cross-links	Families: P5, SB, CDP6		
Not yet documented	Material, Status		

EDH-SIE-00465	F672D	Siemens	switch-unit	STATUS UNKNOWN

Twin 200A Vacu-Break mounting kit, type F2 / 12.75in deep FPP

OEM part number	F672D	A	S487 pp.1-3; oem_spec
Description	Mounting kit for twin 200 A Vacu-Break in type F2 and 12.75in deep FPP power panelboard; 3-ph 3W/4W	A	same as above
Application	branch; 10in unit space	A	same as above
Kit contents	1 200A twin Vacu-Break; 2 1/4-20x1/2 slotted truss screw*; 2 1/4in spacer*; 1 mounting hardware kit; 8 1/4-20x3/8 slotted HWH screw; 2 350 kcmil lug; 4 1/4-20x1/2 hex head mach screw; 4 1/4 lock washer; 4 1/4 flat washer; 3 switch connector; 4 support bracket; 3 5/16-18x1.5 slotted HWH screw*; 2 1/4-20x1.00 slotted HWH screw* (*come with switch)	A	same as above
Dimensions	Fig 4: 4-3/8, 3-5/8, 3-5/8, 16in, 8-3/4, 3-3/8, 3-3/8, 5/8in	A	same as above
Mounting-hole pattern	Support bracket hole 5/8in from top and bottom of 10in unit space, 1/4-20x3/8 thread-forming into Z-rail; switch connectors to interior bus with 1/4-20 thread-forming screws	A	same as above
Cross-links	Families: P5		
Not yet documented	Material, Status, Torque values		

6.9 PUSHMATIC — Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)

FAM-SIE-011 · panelboard · aka Bulldog Pushmatic, Electra-Center, Electri-Center, Pushmatic · markings: Bull Dog, Bulldog, Electri-Center, Gould ITE, ITE Pushmatic, Pushmatic, Siemens

Bulldog Pushmatic panels use push-button (not toggle) bolt-on breakers, grease-lubricated mechanisms reported to stiffen if not exercised, thermal plus (in at least some versions) magnetic trip. Brand passed to ITE/Gould and then Siemens. Replacement 1-2 pole breakers exist (Connecticut Electric UBIP); 3-phase Pushmatic panelboards exist but replacement 3-pole breakers are scarce. Condensed-space P1515 dual breakers do not fit older ITE Pushmatic panels.

Attribute	Value	Cl.	Sources
Status	Obsolete; replacement breakers from Connecticut Electric (UBIP series, 1-2 pole 120/240 V, 10 kAIC ETL) and new-old-stock ITE/Siemens Pushmatic; 3-pole 208Y/120 replacements reported back-ordered/unavailable	C	S223, S227, S244 distributor
Era of manufacture	Bulldog Electric Products Co. (Detroit; patents from 1934-36, panelboard patent US 2,428,320 of 1947); installed mainly 1950-1970; ITE (Gould) purchase stated 1976 (forum says 1950s - conflicting); Siemens c.1982-84	C	S238, S244, S227 other
Successor	Siemens owns Pushmatic trademark (per InspectAPedia/forum); no current panelboard	D	S244, S227 other
Voltage rating	120/240 V 1-ph; some 120/208Y 3-ph panels	C	S227, S244 forum
Branch breakers accepted	Pushmatic push-button breakers (P-series e.g. P1515 dual 15 A condensed); bolt-on to bus	C	S244, S223 other

Breaker families associated: Connecticut Electric UBIP (UBI replacement for Pushmatic), Pushmatic (Bulldog / ITE)
Key documents: S223 Connecticut Electric UBIZ / UBIF / UBIP replacement breaker listings; S227 Bulldog Pushmatic forum threads (3-phase Pushmatic, ITE/Siemens lineage); S238 Pushmatic / Bulldog design history; S244 Pushmatic - Bulldog panels & breakers

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00094	**UBIP115**	Connecticut Electric UBI replacement breaker UBIP115 (Pushmatic One Pole Series, 15 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00095	**UBIP120**	Connecticut Electric UBI replacement breaker UBIP120 (Pushmatic One Pole Series, 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00096	**UBIP130**	Connecticut Electric UBI replacement breaker UBIP130 (Pushmatic One Pole Series, 30 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00105	**UBIP1515**	Connecticut Electric UBI replacement breaker UBIP1515 (Pushmatic Twin Pole Series, 15 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00106	**UBIP1520**	Connecticut Electric UBI replacement breaker UBIP1520 (Pushmatic Twin Pole Series, 15 & 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00107	**UBIP2020**	Connecticut Electric UBI replacement breaker UBIP2020 (Pushmatic Twin Pole Series, 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00104	**UBIP2100**	Connecticut Electric UBI replacement breaker UBIP2100 (Pushmatic Two Pole Series, 100 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00097	**UBIP215**	Connecticut Electric UBI replacement breaker UBIP215 (Pushmatic Two Pole Series, 15 A)	—	current (sheet dated 2004 / Rev. 4/05)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00098	**UBIP220**	Connecticut Electric UBI replacement breaker UBIP220 (Pushmatic Two Pole Series, 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00099	**UBIP230**	Connecticut Electric UBI replacement breaker UBIP230 (Pushmatic Two Pole Series, 30 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00100	**UBIP240**	Connecticut Electric UBI replacement breaker UBIP240 (Pushmatic Two Pole Series, 40 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00101	**UBIP250**	Connecticut Electric UBI replacement breaker UBIP250 (Pushmatic Two Pole Series, 50 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00102	**UBIP260**	Connecticut Electric UBI replacement breaker UBIP260 (Pushmatic Two Pole Series, 60 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00103	**UBIP270**	Connecticut Electric UBI replacement breaker UBIP270 (Pushmatic Two Pole Series, 70 A)	—	current (sheet dated 2004 / Rev. 4/05)

EDH-OTH-00094 — UBIP115

Connecticut Electric / UBI (Unique Breakers, Inc.) | other | **CURRENT (SHEET DATED 2**

Connecticut Electric UBI replacement breaker UBIP115 (Pushmatic One Pole Series, 15 A)

OEM part number	UBIP115 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic One Pole Series, 1-pole, 120 V, 15 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03100-0	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	15	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic One Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00095 — UBIP120

Connecticut Electric / UBI (Unique Breakers, Inc.) | other | **CURRENT (SHEET DATED 2**

Connecticut Electric UBI replacement breaker UBIP120 (Pushmatic One Pole Series, 20 A)

OEM part number	UBIP120 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic One Pole Series, 1-pole, 120 V, 20 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03101-7	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic One Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615, S617 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00096	UBIP130	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIP130 (Pushmatic One Pole Series, 30 A)

OEM part number	UBIP130 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic One Pole Series, 1-pole, 120 V, 30 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03102-4	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	30	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic One Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00105	UBIP1515	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIP1515 (Pushmatic Twin Pole Series, 15 A)

OEM part number	UBIP1515 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic Twin Pole Series, two 1-pole-pole, 120 V, 15 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03110-9	C	same as above
Poles	two 1-pole	C	same as above
Voltage rating	120	C	same as above
Current rating	15	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic Twin Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00106	UBIP1520	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIP1520 (Pushmatic Twin Pole Series, 15 & 20 A)

OEM part number	UBIP1520 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic Twin Pole Series, two 1-pole-pole, 120 V, 15 & 20 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03112-3	C	same as above
Poles	two 1-pole	C	same as above
Voltage rating	120	C	same as above
Current rating	15 & 20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic Twin Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00107	UBIP2020	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIP2020 (Pushmatic Twin Pole Series, 20 A)

OEM part number	UBIP2020 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic Twin Pole Series, two 1-pole-pole, 120 V, 20 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03111-6	C	same as above
Poles	two 1-pole	C	same as above
Voltage rating	120	C	same as above
Current rating	20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic Twin Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00104	UBIP2100	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIP2100 (Pushmatic Two Pole Series, 100 A)

OEM part number	UBIP2100 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic Two Pole Series, 2-pole, 120/240 V, 100 A, HACR & SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03113-0	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	100	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic Two Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00097	UBIP215	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIP215 (Pushmatic Two Pole Series, 15 A)

OEM part number	UBIP215 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic Two Pole Series, 2-pole, 120/240 V, 15 A, HACR & SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03103-1	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	15	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic Two Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00098	UBIP220	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIP220 (Pushmatic Two Pole Series, 20 A)

OEM part number	UBIP220 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic Two Pole Series, 2-pole, 120/240 V, 20 A, HACR & SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03104-8	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic Two Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00099	UBIP230	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIP230 (Pushmatic Two Pole Series, 30 A)

OEM part number	UBIP230 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic Two Pole Series, 2-pole, 120/240 V, 30 A, HACR & SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03105-5	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	30	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic Two Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00100	UBIP240	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIP240 (Pushmatic Two Pole Series, 40 A)

OEM part number	UBIP240 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic Two Pole Series, 2-pole, 120/240 V, 40 A, HACR & SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03106-2	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	40	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic Two Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00101	UBIP250	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIP250 (Pushmatic Two Pole Series, 50 A)

OEM part number	UBIP250 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic Two Pole Series, 2-pole, 120/240 V, 50 A, HACR & SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03107-9	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	50	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic Two Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00102	UBIP260	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIP260 (Pushmatic Two Pole Series, 60 A)

OEM part number	UBIP260 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic Two Pole Series, 2-pole, 120/240 V, 60 A, HACR & SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03108-6	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	60	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic Two Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00103	UBIP270	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIP270 (Pushmatic Two Pole Series, 70 A)

OEM part number	UBIP270 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, Pushmatic Two Pole Series, 2-pole, 120/240 V, 70 A, HACR & SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03109-3	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	70	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Pushmatic Two Pole Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: PUSHMATIC · Breakers: Connecticut Electric UBIP (UBI replacement for Pushmatic)		
Not yet documented	Dimensions, OEM instruction document, Material		

6.10 RP1 — Type P1 (Revised P1)

FAM-SIE-001 · panelboard · aka New Revised P1, NextGen P1, P1...N, P1...T, Revised P1 · markings: Siemens

Siemens 20in wide x 5.75in deep bolt-on lighting/appliance panelboard, 250A or 400A bus, split (cross-bussed) neutral at both ends of an open-ended bus. Field-convertible mains: main lug kits (MLK*) or horizontal main/subfeed strap kits (MBK*) through 250A, vertical 400A main. Catalog numbers end in T (feed-thru/subfeed space) or N (non-feed-thru, 6in shorter box). Revised P1 kits are not interchangeable with original P1, S1/S2 or SE panels.

Attribute	Value	Cl.	Sources
Status	current	A	S165 p.11-11; oem_spec
Era of manufacture	Introduced 2015 per SpeedFax p.11-7 note ('Revised P1 was introduced in 2015'); p.11-11 table header says 'Revised P1 introduced 2014' (OEM document is internally inconsistent (2014 vs 2015))	A	S165 pp.11-7, 11-11; oem_spec
Voltage rating	240V AC max for P1A/P1X; 480Y/277V for P1E/P18; 600Y/347V limited (factory only)	A	S165 pp.11-7, 11-24; oem_spec
Main ampacity	250A or 400A bus; 400A max mains	A	same as above

Attribute	Value	Cl.	Sources
Branch breakers accepted	BL/BLH/HBL, BQD, BT twin (P1A/P1X/P1E); xGB (NGB/HGB/LGB) and 3VA41 (P18 interiors only)	A	S165 pp.11-7, 11-16; oem_spec
Branch connection limit	All configurations allow 125A per connection max (250A per pair); 18-circuit 250A Revised P1 limited to 100A per connection (200A per pair) with BL/BQD/xGB across from each other	A	S165 p.11-12 footnote; oem_spec
Torque table	P1-250/P1-400 torque label: #10-32 branch breaker to phase bus and BL/BT/BQD/ED/xGB/3VA41 (and FD/QJ/QR) breaker to straps 20 lb-in; 1/4-20 straps to phase bus (BL/BT/BQD/ED/FD/xGB/QJ/QR/3VA41/3VA52/3VA61/3VA62) 72 lb-in; P1-250 main copper lugs to phase bus 1/4-20 72 lb-in; P1-400 main lugs to phase bus 5/16-18 144 lb-in; 3VA52/61/62 breaker to bus extensions 5/16-18 177 lb-in; JD breaker to straps 3/8-16 240 lb-in; 3VA53/63 to bus extensions 3/8-16 354 lb-in; breaker mounting screws QR 1/4-20 x 3-1/4 35 lb-in, FD/3VA52 1/4-20 x 4 40 lb-in, 3VA61/62 #8-32 x 3 13 lb-in; 3VA nutkeepers 177 (52/61/62) / 354 (53/63) lb-in; branch neutral terminal-strip wire screws 20 lb-in (#14-#10) rising to 45 lb-in (#4, large hole) and 50 lb-in (#3-2/0, large hole) - small/large hole values per label table (column layout not fully legible in text extraction); lug set screws 5/16 Allen 275, 3/8 375, 1/2 500 lb-in; bus connections per bus material (1/8 in Cu / 3/16 in Al): #10-24 25/30 (A&C straps, B connectors), #10-24 neutral strips to risers 30/30, 1/4-20 50/30, 5/16-18 72/108 lb-in. Bus material: catalog ending A/AT = aluminum, C/CT = copper.	A	S297 both sides (P1-250 and P1-400 versions); oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), QR2 / QRH2 / HQR2 / HQR2H
Key documents: S165 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S169 SIE_CS_P1 / Siemens SIOS 109799956 Type P1 Panelboard data sheet (SIE_CS_P1); S172 SI-LP-1633 NextGen P1 panelboard brochure (Siemens Canada); S297 11-D-1030-01 Rev. 03 Revised P1 (P1-250 / P1-400) Hardware Tightening Torque instructions label
Also fits this family (entry printed elsewhere): TPS3 09

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00366	**MBKBC1NBA**	Revised P1 BQD/GB main/subfeed breaker kit, 1-phase	Type BQD and GB breakers (separate BQD and GB support brackets supplie A	unknown
EDH-SIE-00367	**MBKBC3NBA**	Revised P1 BQD/GB main/subfeed breaker kit, 3-phase	Type BQD and GB breakers (separate BQD and GB support brackets supplie A	unknown
EDH-SIE-00364	**MBKBL1A**	Revised P1 BL main/subfeed breaker kit, 1-phase	Type BL breakers (purchased separately) A	unknown
EDH-SIE-00365	**MBKBL3A**	Revised P1 BL main/subfeed breaker kit, 3-phase	Type BL breakers (purchased separately) A	unknown
EDH-SIE-00003	**MBKED1A**	Revised P1 main/subfeed strap kit, ED, 1-ph, 125A	ED (125A max) A	current (2021)
EDH-SIE-00004	**MBKED3A**	Revised P1 main/subfeed strap kit, ED, 3-ph, 125A	ED (125A max) A	current (2021)
EDH-SIE-00007	**MBKFD1A**	Revised P1 main/subfeed strap kit, FD, 1-ph, 250A	FD (250A max) A	current (2021)
EDH-SIE-00008	**MBKFD3A**	Revised P1 main/subfeed strap kit, FD, 3-ph, 250A	FD (250A max) A	current (2021)
EDH-SIE-00326	**MBKJD1A**	Revised P1-400 JD main breaker kit, 1-phase	Top-feed mains: JD, HJD, JXD, HJXD; bottom-feed (reverse fed) mains re A	unknown
EDH-SIE-00327	**MBKJD3A**	Revised P1-400 JD main breaker kit, 3-phase	Top-feed mains: JD, HJD, JXD, HJXD; bottom-feed (reverse fed) mains re A	unknown
EDH-SIE-00012	**MBKJD3B**	RP1 400A JD strap kit 1ph/3ph, 2 fillers	JD, HJD, JXD, HJXD top feed; JXD/HJXD bottom (reverse) feed A	current (2021)
EDH-SIE-00443	**MBKQJ1A**	Revised P1 QJ main/subfeed breaker kit, 1-phase 2/3-wire	QJ2, QJH2, QJ2-H A	unknown
EDH-SIE-00444	**MBKQJ3A**	Revised P1 QJ main/subfeed breaker kit, 3-phase 3/4-wire	QJ2, QJH2, QJ2-H A	unknown
EDH-SIE-00005	**MBKQR1A**	Revised P1 main/subfeed strap kit, QR, 1-ph, 225A	QR (225A max) A	current (2021)
EDH-SIE-00006	**MBKQR3A**	Revised P1 main/subfeed strap kit, QR, 3-ph, 225A	QR (225A max) A	current (2021)
EDH-SIE-00001	**MBKVA41A**	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter) A	current (2021)
EDH-SIE-00002	**MBKVA41B**	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter) A	current (2021)
EDH-SIE-00009	**MBKVA5262A**	Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A	3VA52/61/62 (250A max) A	current (2021)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00010	**MBKVA5262B**	Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A	3VA52/61/62 (250A max) **A**	current (2021)
EDH-SIE-00011	**MBKVA5363A**	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph	3VA53/3VA63 **A**	current (2021)
EDH-SIE-00372	**MBKVAH3200A**	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH3200A)	—	unknown
EDH-SIE-00373	**MBKVAH3250A**	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH3250A)	—	unknown
EDH-SIE-00368	**MBKVAM3150A**	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3150A)	—	unknown
EDH-SIE-00369	**MBKVAM3200A**	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3200A)	—	unknown
EDH-SIE-00370	**MBKVAM3225A**	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3225A)	—	unknown
EDH-SIE-00371	**MBKVAM3250A**	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3250A)	—	unknown

EDH-SIE-00366 MBKBC1NBA — Siemens lineage — main-breaker-kit — STATUS UNKNOWN

Revised P1 BQD/GB main/subfeed breaker kit, 1-phase

OEM part number	MBKBC1NBA	**A**	S308 pp. 2-3; oem_spec
Application	Main or subfeed <=250 A panels; subfeed only above 250 A	**A**	same as above
Breaker compatibility	Type BQD and GB breakers (separate BQD and GB support brackets supplied)	**A**	same as above
Kit contents	Breaker barrier assembly; breaker escutcheon; MAIN label; neutral lug assembly; 1/4-20 x 1/2 hex head SEMS; 4 #10-24 x 7/16 thread-forming (30 lb-in); #10-32 x 3/8 SEMS (20 lb-in); 1/4-20 Belleville nut (72 lb-in); phase-to-phase strap barriers; plastic tree rivets; BQD breaker support bracket; GB breaker support bracket; blank filler	**A**	same as above
Torque values	#10-24 30 lb-in; #10-32 20 lb-in; Belleville nut 72 lb-in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1141-01 Rev. 01: P1-250 Panelboard Kit MBKBC1NBA & MBKBC3NBA BQD / GB Main/Subfeed Breaker Instructions (also P1-400 subfeed)	**A**	same as above
Cross-links	Families: RP1		

EDH-SIE-00367 MBKBC3NBA — Siemens lineage — main-breaker-kit — STATUS UNKNOWN

Revised P1 BQD/GB main/subfeed breaker kit, 3-phase

OEM part number	MBKBC3NBA	**A**	S308 pp. 2-3; oem_spec
Application	Main or subfeed <=250 A panels; subfeed only above 250 A	**A**	same as above
Breaker compatibility	Type BQD and GB breakers (separate BQD and GB support brackets supplied)	**A**	same as above
Kit contents	Breaker barrier assembly; breaker escutcheon; MAIN label; neutral lug assembly; 1/4-20 x 1/2 hex head SEMS; 4 #10-24 x 7/16 thread-forming (30 lb-in); #10-32 x 3/8 SEMS (20 lb-in); 1/4-20 Belleville nut (72 lb-in); phase-to-phase strap barriers; plastic tree rivets; BQD breaker support bracket; GB breaker support bracket; blank filler	**A**	same as above
Torque values	#10-24 30 lb-in; #10-32 20 lb-in; Belleville nut 72 lb-in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1141-01 Rev. 01: P1-250 Panelboard Kit MBKBC1NBA & MBKBC3NBA BQD / GB Main/Subfeed Breaker Instructions (also P1-400 subfeed)	**A**	same as above
Cross-links	Families: RP1		

EDH-SIE-00364	MBKBL1A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1 BL main/subfeed breaker kit, 1-phase

OEM part number	MBKBL1A	A	S307 pp. 2-3; oem_spec
Application	Main or subfeed in panels <=250 A; subfeed only above 250 A	A	same as above
Breaker compatibility	Type BL breakers (purchased separately)	A	same as above
Kit contents	Breaker barrier assembly (strap barriers pre-installed); breaker escutcheon; MAIN label; neutral lug assembly; 1/4-20 x 1/2 hex head SEMS (72 lb-in); 4 #10-24 x 7/16 slotted hex washer thread-forming (30 lb-in); #10-32 x 3/8 hex head SEMS (20 lb-in); 1/4-20 Belleville washer nut (72 lb-in); phase-to-phase strap barriers; plastic tree rivets; breaker support bracket; blank filler (2-pole)	A	same as above
Torque values	Straps to bus 72 lb-in; barrier to rails 30 lb-in; breaker to connectors #10-32 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1140-01 Rev. 00: P1-250 Panelboard Kit MBKBL1A & MBKBL3A BL Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00365	MBKBL3A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1 BL main/subfeed breaker kit, 3-phase

OEM part number	MBKBL3A	A	S307 pp. 2-3; oem_spec
Application	Main or subfeed in panels <=250 A; subfeed only above 250 A	A	same as above
Breaker compatibility	Type BL breakers (purchased separately)	A	same as above
Kit contents	Breaker barrier assembly (strap barriers pre-installed); breaker escutcheon; MAIN label; neutral lug assembly; 1/4-20 x 1/2 hex head SEMS (72 lb-in); 4 #10-24 x 7/16 slotted hex washer thread-forming (30 lb-in); #10-32 x 3/8 hex head SEMS (20 lb-in); 1/4-20 Belleville washer nut (72 lb-in); phase-to-phase strap barriers; plastic tree rivets; breaker support bracket; blank filler (2-pole)	A	same as above
Torque values	Straps to bus 72 lb-in; barrier to rails 30 lb-in; breaker to connectors #10-32 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1140-01 Rev. 00: P1-250 Panelboard Kit MBKBL1A & MBKBL3A BL Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00003	MBKED1A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, ED, 1-ph, 125A

OEM part number	MBKED1A	A	S165, S266 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKED1***A / MBKED3***A = kit with ED breaker factory-installed	A	S266 equivalent; pp. 2-4; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for ED (125A max); breaker not included	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S165 pp.11-13, 11-14; oem_spec
	Main or subfeed in panels rated 250 A or less; subfeed only above 250 A	A	S266 pp. 2-4; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S165 pp.11-8, 11-9; oem_spec
Breaker compatibility	ED (125A max)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	ED2, ED4, ED6, HED4, HED6 (breaker not included)	A	S266 pp. 2-4; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec

Kit contents	Includes DF filler DFFPVA41A (replacing DFFPED01)	A	same as above
	1 breaker barrier assembly; 1 breaker escutcheon; 1 MAIN label; 1 neutral lug assembly; 1/4-20 x 1/2 hex head SEMS screws (72 lb-in); 4 #10-24 x 1/2 slotted hex washer thread-forming screws (30 lb-in); #10-32 x 1/2 hex head SEMS screws (20 lb-in, breaker to straps); 1 1/4-20 Belleville washer nut (72 lb-in); 1 in filler plate (used with 2-pole breaker)	A	S266 pp. 2-4; oem_spec
Torque values	Straps to phase bus 1/4-20 72 lb-in; barrier to base rails #10-24 30 lb-in; ED breaker to straps #10-32 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1113-01 Rev. 00: P1-250 Panelboard Kit MBKED1A & MBKED3A ED Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00004	**MBKED3A**	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, ED, 3-ph, 125A

OEM part number	MBKED3A	A	S165, S266 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKED1***A / MBKED3***A = kit with ED breaker factory-installed	A	S266 equivalent; pp. 2-4; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for ED (125A max); breaker not included	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S165 pp.11-13, 11-14; oem_spec
	Main or subfeed in panels rated 250 A or less; subfeed only above 250 A	A	S266 pp. 2-4; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S165 pp.11-8, 11-9; oem_spec
Breaker compatibility	ED (125A max)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	ED2, ED4, ED6, HED4, HED6 (breaker not included)	A	S266 pp. 2-4; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA41A (replacing DFFPED01)	A	same as above
	1 breaker barrier assembly; 1 breaker escutcheon; 1 MAIN label; 1 neutral lug assembly; 1/4-20 x 1/2 hex head SEMS screws (72 lb-in); 4 #10-24 x 1/2 slotted hex washer thread-forming screws (30 lb-in); #10-32 x 1/2 hex head SEMS screws (20 lb-in, breaker to straps); 1 1/4-20 Belleville washer nut (72 lb-in); 1 in filler plate (used with 2-pole breaker)	A	S266 pp. 2-4; oem_spec
Torque values	Straps to phase bus 1/4-20 72 lb-in; barrier to base rails #10-24 30 lb-in; ED breaker to straps #10-32 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1113-01 Rev. 00: P1-250 Panelboard Kit MBKED1A & MBKED3A ED Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Replacement / successor	Factory kits with breaker: MBKED3100A, MBKED3125A (3-pole ED4) (Same mounting family, sold with breaker installed; listed for reference)	A	S165 p.11-14; oem_spec

Cross-links	Families: RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00007	**MBKFD1A**	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, FD, 1-ph, 250A

OEM part number	MBKFD1A	A	S165, S265 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKFD1***A / MBKFD3***A = same kit with FD breaker (amperage ***) factory-installed on barrier	A	S265 equivalent; pp. 2-4; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for FD (250A max); breaker not included	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S165 pp.11-13, 11-14; oem_spec
	Main or subfeed in panels rated 250 A or less; subfeed only in panels above 250 A (P1-400)	A	S265 pp. 2-4; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S165 pp.11-8, 11-9; oem_spec
Breaker compatibility	FD (250A max)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	FD6, FXD6, HFD6, HFXD6 (breaker not included). Do not backfeed breakers marked LINE and LOAD with interchangeable trips (FD6, HFD6).	A	S265 pp. 2-4; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPFD01	A	same as above
	Item 1 breaker barrier assembly; 2 breaker escutcheon; 3 MAIN label; 4 neutral lug assembly; 5 1/4-20 x 1/2 hex head SEMS screws (72 lb-in); 6 #10-24 x 1/2 slotted hex washer thread-forming screws qty 2 (30 lb-in); 7 1/4-20 x 7/8 hex head SEMS screws (72 lb-in); 8 1/4-20 Belleville washer nut (72 lb-in); 9 two 1/4-20 x 4 in slotted round head screws (20 lb-in)	A	S265 pp. 2-4; oem_spec
Torque values	Straps to phase bus 1/4-20 SEMS 72 lb-in; barrier to base rails #10-24 30 lb-in; breaker to straps 1/4-20 x 7/8 SEMS 72 lb-in; neutral nut 72 lb-in; breaker mounting 1/4-20 x 4 in slotted screws 20 lb-in max (P1-400)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1111-01 Rev. 00: P1-250 Panelboard Kit MBKFD1A & MBKFD3A FD Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00008	**MBKFD3A**	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, FD, 3-ph, 250A

OEM part number	MBKFD3A	A	S165, S265 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKFD1***A / MBKFD3***A = same kit with FD breaker (amperage ***) factory-installed on barrier	A	S265 equivalent; pp. 2-4; oem_spec

Description	Revised P1 3-phase main/subfeed strap kit for FD (250A max); breaker not included	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S165 pp.11-13, 11-14; oem_spec
	Main or subfeed in panels rated 250 A or less; subfeed only in panels above 250 A (P1-400)	A	S265 pp. 2-4; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S165 pp.11-8, 11-9; oem_spec
Breaker compatibility	FD (250A max)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	FD6, FXD6, HFD6, HFXD6 (breaker not included). Do not backfeed breakers marked LINE and LOAD with interchangeable trips (FD6, HFD6).	A	S265 pp. 2-4; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPFD01	A	same as above
	Item 1 breaker barrier assembly; 2 breaker escutcheon; 3 MAIN label; 4 neutral lug assembly; 5 1/4-20 x 1/2 hex head SEMS screws (72 lb-in); 6 #10-24 x 1/2 slotted hex washer thread-forming screws qty 2 (30 lb-in); 7 1/4-20 x 7/8 hex head SEMS screws (72 lb-in); 8 1/4-20 Belleville washer nut (72 lb-in); 9 two 1/4-20 x 4 in slotted round head screws (20 lb-in)	A	S265 pp. 2-4; oem_spec
Torque values	Straps to phase bus 1/4-20 SEMS 72 lb-in; barrier to base rails #10-24 30 lb-in; breaker to straps 1/4-20 x 7/8 SEMS 72 lb-in; neutral nut 72 lb-in; breaker mounting 1/4-20 x 4 in slotted screws 20 lb-in max (P1-400)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1111-01 Rev. 00: P1-250 Panelboard Kit MBKFD1A & MBKFD3A FD Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Replacement / successor	Kits with breaker: MBKFD3150A, MBKFD3175A, MBKFD3200A, MBKFD3225A, MBKFD3250A (3P FXD6) (Same mounting family, sold with breaker installed; listed for reference)	A	S165 p.11-14; oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BMBKFD3A ('OEM P/N MBKFD3A; P1-T one 3-pole FD main or branch'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Cross-links	Families: RP1 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00326	MBKJD1A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-400 JD main breaker kit, 1-phase

OEM part number	MBKJD1A	A	S268 pp. 2-4; oem_spec
Alternate / superseded numbers	MBKJD1***A, MBKJD12***A = JD kits with breaker (amperage ***), incl. bottom-feed variants [equivalent]	A	same as above
Application	Main breaker, 400 A Revised P1	A	same as above
Breaker compatibility	Top-feed mains: JD, HJD, JXD, HJXD; bottom-feed (reverse fed) mains require JXD, HJXD. Breaker purchased separately. Line lugs: (2) 250 MCM per phase use TA2J6500 (Al) or TC2J6500 (Cu); (1) 600 MCM per phase use TA1L6750 or copper TC1J6600.	A	same as above
Kit contents	1 breaker support barrier; phase connectors; 1 breaker escutcheon; 1 MAIN label; 3/8 narrow washers; helical spring lockwashers; 3/8-16 x 1 hex head bolts (240 lb-in); 5/16-18 x 3/4 hex head SEMS screws (two per joint); 2 1/4-20 x 2-3/4 Phillips round head thread-forming screws (72 lb-in); 600 kcmil neutral lug; 350 kcmil neutral lug assembly; 1 anti-turn plate; 1 1/4-20 x 1 carriage bolt; 2 1/4-20 Belleville washer nuts (72 lb-in)	A	same as above
Torque values	JD breaker to connectors 3/8-16 = 240 lb-in; connectors to bus 5/16-18 SEMS (P1-400 label 144 lb-in); 1/4-20 = 72 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1115-01 Rev. 02: P1-400 Panelboard Kit MBKJD1A & MBKJD3A JD Main Breaker Kit Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00327	MBKJD3A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-400 JD main breaker kit, 3-phase

OEM part number	MBKJD3A	A	S268 pp. 2-4; oem_spec
Alternate / superseded numbers	MBKJD3***A, MBKJD32***A = JD kits with breaker (amperage ***), incl. bottom-feed variants [equivalent]	A	same as above
Application	Main breaker, 400 A Revised P1	A	same as above
Breaker compatibility	Top-feed mains: JD, HJD, JXD, HJXD; bottom-feed (reverse fed) mains require JXD, HJXD. Breaker purchased separately. Line lugs: (2) 250 MCM per phase use TA2J6500 (Al) or TC2J6500 (Cu); (1) 600 MCM per phase use TA1L6750 or copper TC1J6600.	A	same as above
Kit contents	1 breaker support barrier; phase connectors; 1 breaker escutcheon; 1 MAIN label; 3/8 narrow washers; helical spring lockwashers; 3/8-16 x 1 hex head bolts (240 lb-in); 5/16-18 x 3/4 hex head SEMS screws (two per joint); 2 1/4-20 x 2-3/4 Phillips round head thread-forming screws (72 lb-in); 600 kcmil neutral lug; 350 kcmil neutral lug assembly; 1 anti-turn plate; 1 1/4-20 x 1 carriage bolt; 2 1/4-20 Belleville washer nuts (72 lb-in)	A	same as above
Torque values	JD breaker to connectors 3/8-16 = 240 lb-in; connectors to bus 5/16-18 SEMS (P1-400 label 144 lb-in); 1/4-20 = 72 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1115-01 Rev. 02: P1-400 Panelboard Kit MBKJD1A & MBKJD3A JD Main Breaker Kit Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00012	MBKJD3B	Siemens	main-breaker-kit	CURRENT (2021)

RP1 400A JD strap kit 1ph/3ph, 2 fillers

OEM part number	MBKJD3B	A	S165, S312 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKJD1A	A	S165 supersedes; p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	MBKJD3A [supersedes]	A	same as above
Description	RP1 400A JD strap kit 1ph/3ph, 2 fillers; breaker not included	A	same as above
Application	main only (400A kit is main only, not allowed for subfeed)	A	S165, S172 s1 p.11-13; s8 kit table footnote 1; oem_spec
Installation location	Vertical 400A main position	A	S165 p.11-24 footnote b (400A main breaker is vertical mounted); oem_spec
Breaker compatibility	JD, HJD, JXD, HJXD top feed; JXD/HJXD bottom (reverse) feed	A	S312 pp. 2-4; oem_spec

	JD frame (JXD2/JXD6/JD6/HJ(X)D6) 400A (Table says 'JD'; frame variants from original P1 MBKJD1/3 row)	B	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	400A max	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	includes DFFPJD02 (large) and DFFPJD01 (small) filler	A	same as above
	Breaker support barrier; phase connectors; breaker escutcheon; MAIN label; 3/8 narrow washers; helical spring lockwashers; 3/8-16 x 1 hex head bolts (240 lb-in); 5/16-18 x 3/4 SEMS (72 lb-in 1/8 in Cu / 108 lb-in 3/16 in Al); 2 1/4-20 x 2-3/4 Phillips round head thread-forming (30 lb-in in Rev 05; 72 lb-in in Rev 02); anti-turn plate; 1/4-20 x 1 carriage bolt; 2 1/4-20 Belleville nuts (72 lb-in)	A	S312 pp. 2-4; oem_spec
Torque values	3/8-16 breaker bolts 240 lb-in; connector to bus 5/16-18: 72 lb-in (1/8 in Cu) / 108 lb-in (3/16 in Al)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1115-01 Rev. 05: P1-400 Panelboard Kit MBKJD1A & MBKJD3A (MBKJD3B) JD Main Breaker Kit Instructions, Rev. 05	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00443	**MBKQJ1A**	Siemens	main-breaker-kit	STATUS UNKNOWN

Revised P1 QJ main/subfeed breaker kit, 1-phase 2/3-wire

OEM part number	MBKQJ1A	A	S466 pp.1-4; oem_spec
Alternate / superseded numbers	MBKQJ1***A (Kits with breaker pre-installed: MBKQJ1***A / MBKQJ3***A / MBKQJ1***HA / MBKQJ3***HA, *** = breaker amperage (150, 200, etc.))	A	S466 equivalent; p.4; oem_spec
Description	Main/subfeed breaker kit for QJ2, QJH2 and QJ2-H breakers in Revised P1 panelboards, 1-phase 2/3-wire; breaker purchased separately	A	S466 pp.1-4; oem_spec
Application	Main or subfeed in panels rated 250 A or less; subfeed ONLY in panels above 250 A (P1-400)	A	same as above
Installation location	Main end of panel (main) or feed-thru/subfeed end (subfeed); neutral lug assembly mounted below neutral cross bus	A	same as above
Breaker compatibility	QJ2, QJH2, QJ2-H	A	same as above
Kit contents	1 breaker barrier assembly; 1 breaker escutcheon; 1 MAIN label; 1 neutral lug assembly; 1/4-20x1/2 hex head SEMS assembly screws (2 for 1-ph, 3 for 3-ph) to phase bus; 4x #10-24x1/2 slotted hex washer thread-forming screws (barrier to base rails); 1/4-20x1/2 hex head SEMS (2/3) breaker to straps; 1x 1/4-20 belleville washer nut; 2x 1/4-20x3-1/4 slotted round head screws (breaker to barrier). Breaker NOT included.	A	same as above
Fasteners	1/4-20x1/2 hex SEMS; #10-24x1/2 slotted hex washer thread-forming; 1/4-20 belleville washer nut; 1/4-20x3-1/4 slotted round head	A	same as above
Torque values	1/4-20 SEMS to phase bus 72 lb-in; #10-24 thread-forming to base rails 30 lb-in; 1/4-20 SEMS breaker-to-strap 72 lb-in; 1/4-20 belleville nut (neutral) 72 lb-in; 1/4-20x3-1/4 round head breaker-to-barrier 20 lb-in max. Tighten order: base rails, phase bus, breaker straps.	A	same as above
Identification features	Revised P1 interior part number ends in 'N' or 'T' (e.g. P1E42MC250AT); kit will not fit Original P1	A	same as above
Cross-links	Families: RP1 · Breakers: QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Dimensions, Mounting-hole pattern, Material, Status		

EDH-SIE-00444	MBKQJ3A	Siemens	main-breaker-kit	STATUS UNKNOWN

Revised P1 QJ main/subfeed breaker kit, 3-phase 3/4-wire

OEM part number	MBKQJ3A	A	S466, S628 pp.1-4; oem_spec
Alternate / superseded numbers	MBKQJ3***A (Kits with breaker pre-installed: MBKQJ1***A / MBKQJ3***A / MBKQJ1***HA / MBKQJ3***HA, *** = breaker amperage (150, 200, etc.))	A	S466 equivalent; p.4; oem_spec
Description	Main/subfeed breaker kit for QJ2, QJH2 and QJ2-H breakers in Revised P1 panelboards, 3-phase 3/4-wire; breaker purchased separately	A	S466 pp.1-4; oem_spec
	OEM P/N MBKQJ3A; P1-T one 3-pole QJ/HQJ main or subfeed (seller listing)	C	S628 distributor
Application	Main or subfeed in panels rated 250 A or less; subfeed ONLY in panels above 250 A (P1-400)	A	S466 pp.1-4; oem_spec
Installation location	Main end of panel (main) or feed-thru/subfeed end (subfeed); neutral lug assembly mounted below neutral cross bus	A	same as above
Breaker compatibility	QJ2, QJH2, QJ2-H	A	same as above
Kit contents	1 breaker barrier assembly; 1 breaker escutcheon; 1 MAIN label; 1 neutral lug assembly; 1/4-20x1/2 hex head SEMS assembly screws (2 for 1-ph, 3 for 3-ph) to phase bus; 4x #10-24x1/2 slotted hex washer thread-forming screws (barrier to base rails); 1/4-20x1/2 hex head SEMS (2/3) breaker to straps; 1x 1/4-20 belleville washer nut; 2x 1/4-20x3-1/4 slotted round head screws (breaker to barrier). Breaker NOT included.	A	same as above
Fasteners	1/4-20x1/2 hex SEMS; #10-24x1/2 slotted hex washer thread-forming; 1/4-20 belleville washer nut; 1/4-20x3-1/4 slotted round head	A	same as above
Torque values	1/4-20 SEMS to phase bus 72 lb-in; #10-24 thread-forming to base rails 30 lb-in; 1/4-20 SEMS breaker-to-strap 72 lb-in; 1/4-20 belleville nut (neutral) 72 lb-in; 1/4-20x3-1/4 round head breaker-to-barrier 20 lb-in max. Tighten order: base rails, phase bus, breaker straps.	A	same as above
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BMBKQJ3A ('OEM P/N MBKQJ3A; P1-T one 3-pole QJ/HQJ main or subfeed'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Identification features	Revised P1 interior part number ends in 'N' or 'T' (e.g. P1E42MC250AT); kit will not fit Original P1	A	S466 pp.1-4; oem_spec
Cross-links	Families: RP1 · Breakers: QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Dimensions, Mounting-hole pattern, Material, Status		

EDH-SIE-00005	MBKQR1A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, QR, 1-ph, 225A

OEM part number	MBKQR1A	A	S165, S467 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKQR***1A (Breaker-included versions MBKQR1***A, MBKQR3***A, MBKQR1***HA, MBKQR3***HA; *** = 100,125,150,175,200 or 225)	A	S467 equivalent; p.4; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for QR (225A max); breaker not included	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	Main/subfeed breaker kit for 225 A max QR2, QRH2, HQR2 and HQR2H breakers in Revised P1, 1-phase 2/3-wire; breaker separate	A	S467 pp.1-4; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S165 pp.11-13, 11-14; oem_spec
	Main (250 A panels only) or subfeed; subfeed only in panels above 250 A	A	S467 pp.1-4; oem_spec
Installation location	Main end or feed-thru/subfeed end; service-entrance panels use service disconnect label from bonding kit instead of MAIN label	A	same as above
	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S165 pp.11-8, 11-9; oem_spec
Breaker compatibility	QR (225A max)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	QR2, QRH2, HQR2, HQR2H (225 A max)	A	S467 pp.1-4; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference

Current rating	225A max	A	S165, S467 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler MBKQRFK	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	1 breaker barrier assembly; 1 breaker escutcheon; 1 MAIN label; 1 neutral lug assembly; 1/4-20x1/2 hex SEMS (2 for 1-ph/3 for 3-ph) to phase bus; 4x #10-24x7/16 slotted hex washer thread-forming; 1/4-20x1/2 hex SEMS (2/3) breaker to connectors; 1x 1/4-20 belleville washer nut; 1/4-20x3-1/4 slotted round head screws (1 for 1-ph, 2 for 3-ph). Breaker NOT included.	A	S467 pp.1-4; oem_spec
Torque values	1/4-20 SEMS to phase bus 72 lb-in; #10-24x7/16 thread-forming to base rails 30 lb-in; 1/4-20 SEMS breaker-to-strap 72 lb-in; 1/4-20 belleville nut (neutral) 72 lb-in; 1/4-20x3-1/4 round head breaker-to-barrier 20 lb-in max. Tighten order: base rails, phase bus, breaker straps.	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Replacement / successor	Kits with breaker: MBKQR1125A..MBKQR1225A (2P QR2 125-225A, 10kA); MBKQR1125HA..MBKQR1225HA (2P HQR2, 65kA) (Same mounting family, sold with breaker installed; listed for reference)	A	S165 p.11-14; oem_spec
Identification features	Revised P1 interior part number ends in 'N' or 'T'	A	S467 pp.1-4; oem_spec
Cross-links	Families: RP1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H, QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00006 **MBKQR3A** Siemens main-breaker-kit **CURRENT (2021)**

Revised P1 main/subfeed strap kit, QR, 3-ph, 225A

OEM part number	MBKQR3A	A	S165, S467 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKQR***3A (Breaker-included versions MBKQR1***A, MBKQR3***A, MBKQR1***HA, MBKQR3***HA; *** = 100,125,150,175,200 or 225)	A	S467 equivalent; p.4; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for QR (225A max); breaker not included	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	Main/subfeed breaker kit for 225 A max QR2, QRH2, HQR2 and HQR2H breakers in Revised P1, 3-phase 3/4-wire; breaker separate	A	S467 pp.1-4; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S165 pp.11-13, 11-14; oem_spec
	Main (250 A panels only) or subfeed; subfeed only in panels above 250 A	A	S467 pp.1-4; oem_spec
Installation location	Main end or feed-thru/subfeed end; service-entrance panels use service disconnect label from bonding kit instead of MAIN label	A	same as above
	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S165 pp.11-8, 11-9; oem_spec
Breaker compatibility	QR (225A max)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	QR2, QRH2, HQR2, HQR2H (225 A max)	A	S467 pp.1-4; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	225A max	A	S165, S467 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec

Kit contents	Includes DF filler MBKQRFK	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	1 breaker barrier assembly; 1 breaker escutcheon; 1 MAIN label; 1 neutral lug assembly; 1/4-20x1/2 hex SEMS (2 for 1-ph/3 for 3-ph) to phase bus; 4x #10-24x7/16 slotted hex washer thread-forming; 1/4-20x1/2 hex SEMS (2/3) breaker to connectors; 1x 1/4-20 belleville washer nut; 1/4-20x3-1/4 slotted round head screws (1 for 1-ph, 2 for 3-ph). Breaker NOT included.	A	S467 pp.1-4; oem_spec
Torque values	1/4-20 SEMS to phase bus 72 lb-in; #10-24x7/16 thread-forming to base rails 30 lb-in; 1/4-20 SEMS breaker-to-strap 72 lb-in; 1/4-20 belleville nut (neutral) 72 lb-in; 1/4-20x3-1/4 round head breaker-to-barrier 20 lb-in max. Tighten order: base rails, phase bus, breaker straps.	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Replacement / successor	Kits with breaker: MBKQR3125A..MBKQR3225A (3P QR2); MBKQR3125HA..MBKQR3225HA (3P HQR2) (Same mounting family, sold with breaker installed; listed for reference)	A	S165 p.11-14; oem_spec
Aftermarket / reproduction	Sourcing: Breaker King stocks under SKU BMBKQR3A ('OEM P/N MBKQR3A; P1-T one 3-pole QR/HQR main or subfeed'); condition (new/surplus/aftermarket) not stated (seller SKU for OEM-numbered item; not a claim of an aftermarket equivalent)	D	S628 distributor
Identification features	Revised P1 interior part number ends in 'N' or 'T'	A	S467 pp.1-4; oem_spec
Cross-links	Families: RP1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H, QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00001 MBKVA41A Siemens main-breaker-kit CURRENT (2021)

Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A

OEM part number	MBKVA41A	A	S165, S309 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKBL1A (Old kit: 'Parts will no longer be available after inventory is depleted')	A	S165 supersedes; p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	MBKBC1NBA [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	A	same as above
Description	Revised P1 1-phase main/subfeed strap kit for BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S165 pp.11-13, 11-14; oem_spec
	Main or subfeed <=250 A; subfeed only in Revised P1 400 A	A	S309 pp. 2-3; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S165 pp.11-8, 11-9; oem_spec
Breaker compatibility	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	BL, BQD, xGB or 3VA4 breakers (purchased separately)	A	S309 pp. 2-3; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes deadfront filler DFFPVA41A	A	same as above
	Strap and barrier assembly; breaker escutcheon (rib on rear toward unit space); MAIN label; neutral lug assembly; 1/4-20 x 1/2 hex head SEMS (3 for 1-ph / 4 for 3-ph); 2 #10-24 x 7/16 thread-forming (30 lb-in); #10-32 x 3/8 SEMS (2 for 1-ph / 3 for 3-ph; 20 lb-in); BL/BQD breaker support bracket; 1 in blank filler	A	S309 pp. 2-3; oem_spec

Torque values	1/4-20 SEMS 72 lb-in for strap-to-bus but ONLY 40 lb-in where into plastic (BL/BQD support bracket); #10-24 30 lb-in; #10-32 20 lb-in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1193-01 Rev. 00: MBKVA41A or MBKVA41B BL / BQD / xGB / 3VA4 Main / Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Status	current (2021)	**A**	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00002	**MBKVA41B**	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A

OEM part number	MBKVA41B	**A**	S165, S309 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKBL3A (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	S165 supersedes; p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	MBKBC3NBA [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
Description	Revised P1 3-phase main/subfeed strap kit for BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S165 pp.11-13, 11-14; oem_spec
	Main or subfeed <=250 A; subfeed only in Revised P1 400 A	**A**	S309 pp. 2-3; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S165 pp.11-8, 11-9; oem_spec
Breaker compatibility	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter)	**A**	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	BL, BQD, xGB or 3VA4 breakers (purchased separately)	**A**	S309 pp. 2-3; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	**B**	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	**A**	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes deadfront filler DFFPVA41A	**A**	same as above
	Strap and barrier assembly; breaker escutcheon (rib on rear toward unit space); MAIN label; neutral lug assembly; 1/4-20 x 1/2 hex head SEMS (3 for 1-ph / 4 for 3-ph); 2 #10-24 x 7/16 thread-forming (30 lb-in); #10-32 x 3/8 SEMS (2 for 1-ph / 3 for 3-ph; 20 lb-in); BL/BQD breaker support bracket; 1 in blank filler	**A**	S309 pp. 2-3; oem_spec
Torque values	1/4-20 SEMS 72 lb-in for strap-to-bus but ONLY 40 lb-in where into plastic (BL/BQD support bracket); #10-24 30 lb-in; #10-32 20 lb-in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1193-01 Rev. 00: MBKVA41A or MBKVA41B BL / BQD / xGB / 3VA4 Main / Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Status	current (2021)	**A**	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00009	MBKVA5262A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A

OEM part number	MBKVA5262A	A	S165, S310 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	Breaker-included versions: MBKVAM3150A, MBKVAM3200A, MBKVAM3225A, MBKVAM3250A, MBKVAH3200A, MBKVAH3250A	A	S310 equivalent; pp. 1-4; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for 3VA52/61/62 (250A max); breaker not included	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S165 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S165 pp.11-8, 11-9; oem_spec
Breaker compatibility	3VA52/61/62 (250A max)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	3VA52 (MFAS, HFAS, CFAS), 3VA61 (MDAE, HDAE, CDAE), 3VA62 (MFAE, HFAE, CFAE)	A	S310 pp. 1-4; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA5262A	A	same as above
	Strap and barrier assembly; 5/16-18 x 3/4 socket head cap machine screws (177 lb-in); 2 #10-24 x 7/16 thread-forming (30 lb-in); 3VA52/3VA62 hardware kit BBKVA5262P2HW (nut keepers, bus extensions); neutral lug assembly; breaker escutcheon; 2 MAIN labels	A	S310 pp. 1-4; oem_spec
Torque values	Breaker to strap 5/16-18 SHCS 177 lb-in; strap to bus 72 lb-in; #8-32 breaker mounting 13 lb-in (per RP1 label)	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Requires (stated)	Older 250A/400A RP1 panels not listing this kit: replace all four deadfront supports with P1DFS250AFT (feed-through/main) or P1DFS250ANFT (non-feed-through) for 250A, P1DFS400A for 400A (8 gage steel, ~0.17 in); replace remaining main/subfeed blank fillers with DFFP01B (250A, Siemens 11-D-4612-01) or DFFP01C (400A main, 11-D-4600-01); replace all 1 in branch fillers with DFFP1A (not QF3 or DFFP1)	A	S310 pp. 1-4; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00010	MBKVA5262B	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A

OEM part number	MBKVA5262B	A	S165, S310 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	Breaker-included versions: MBKVAM3150A, MBKVAM3200A, MBKVAM3225A, MBKVAM3250A, MBKVAH3200A, MBKVAH3250A	A	S310 equivalent; pp. 1-4; oem_spec

Description	Revised P1 3-phase main/subfeed strap kit for 3VA52/61/62 (250A max); breaker not included	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S165 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S165 pp.11-8, 11-9; oem_spec
Breaker compatibility	3VA52/61/62 (250A max)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	3VA52 (MFAS, HFAS, CFAS), 3VA61 (MDAE, HDAE, CDAE), 3VA62 (MFAE, HFAE, CFAE)	A	S310 pp. 1-4; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA5262A	A	same as above
	Strap and barrier assembly; 5/16-18 x 3/4 socket head cap machine screws (177 lb-in); 2 #10-24 x 7/16 thread-forming (30 lb-in); 3VA52/3VA62 hardware kit BBKVA5262P2HW (nut keepers, bus extensions); neutral lug assembly; breaker escutcheon; 2 MAIN labels	A	S310 pp. 1-4; oem_spec
Torque values	Breaker to strap 5/16-18 SHCS 177 lb-in; strap to bus 72 lb-in; #8-32 breaker mounting 13 lb-in (per RP1 label)	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Replacement / successor	Kits with breaker: MBKVAM3150A/3200A/3225A/3250A (3VA52 MFAS 35kA), MBKVAH3200A/3250A (3VA52 HFAS 65kA) (Same mounting family, sold with breaker installed; listed for reference)	A	S165 p.11-14; oem_spec
Requires (stated)	Older 250A/400A RP1 panels not listing this kit: replace all four deadfront supports with P1DFS250AFT (feed-through/main) or P1DFS250ANFT (non-feed-through) for 250A, P1DFS400A for 400A (8 gage steel, ~0.17 in); replace remaining main/subfeed blank fillers with DFFP01B (250A, Siemens 11-D-4612-01) or DFFP01C (400A main, 11-D-4600-01); replace all 1 in branch fillers with DFFP1A (not QF3 or DFFP1)	A	S310 pp. 1-4; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00011	**MBKVA5363A**	Siemens	main-breaker-kit	CURRENT (2021)

RP1 400A 3VA53/63 main strap kit, 1ph or 3ph

OEM part number	MBKVA5363A	A	S165, S311 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	Breaker-included versions: MBKVAM1300A, MBKVAM1400A, MBKVAH3300A, MBKVAH3400A, MBKVAM3300A, MBKVAM3400A	A	S311 equivalent; pp. 1-4; oem_spec
Description	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph; breaker not included	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main only (400A kit is main only, not allowed for subfeed)	A	S165, S172 s1 p.11-13; s8 kit table footnote 1; oem_spec
	Main breaker, 400 A Revised P1; top feed (lugs at ON end) or bottom feed	A	S311 pp. 1-4; oem_spec

Installation location	Vertical 400A main position	**A**	S165 p.11-24 footnote b (400A main breaker is vertical mounted); oem_spec
Breaker compatibility	3VA53/3VA63	**A**	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	3VA53 / 3VA63 main breakers (purchased separately); line-side lug 3VA9473-0JJ23 (2) 2/0-600 kcmil ports (default; 2-port lugs in P1 restricted to 500 kcmil max); breaker kits include 3VA9373-0JJ23 connectors	**A**	S311 pp. 1-4; oem_spec
Current rating	400A max	**A**	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	includes MBKVA5363JD (large) filler; 'These new 400A kits include both small and large filler plates'	**A**	same as above
Dimensions	Breaker support location 11.23 in (top/bottom feed configurations, Fig. 2)	**A**	S311 pp. 1-4; oem_spec
Fasteners	Breaker connectors to section/main bus two 5/16-18 SEMS per joint; neutral 600 kcmil lug on 1/4-20 x 1 carriage bolt + anti-turn plate + Belleville nut; 350 kcmil neutral lug assembly under riser	**A**	same as above
Torque values	5/16-18 SEMS: 72 lb-in for 1/8 in Cu bus, 108 lb-in for 3/16 in Al bus; 3VA53/63 nutkeepers 354 lb-in (RP1 label)	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1169-01 Rev. 02: MBKVA5363A 3VA Main Strap Kit Installation Instructions for P1-400 Panelboards	**A**	same as above
Status	current (2021)	**A**	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00372	**MBKVAH3200A**	Siemens lineage	main-breaker-kit	**STATUS UNKNOWN**

Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH3200A)

OEM part number	MBKVAH3200A	**A**	S310 p. 1 (part number list); oem_spec
Alternate / superseded numbers	MBKVA5262B (strap kit without breaker) [equivalent]	**A**	same as above
Description	Kit that includes breaker factory-attached to MBKVA5262-type strap and barrier assembly (listed under 'Also for 3VA breaker kits with breaker INCLUDED')	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Current rating, Breaker compatibility		
Open question	*Confirm breaker frame/interrupting/ampere in MBKVAH3200A (M/H letter and 150-250 suffix inferred as interrupting class and ampere, not stated)*		

EDH-SIE-00373	MBKVAH3250A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH3250A)

OEM part number	MBKVAH3250A	**A**	S310 p. 1 (part number list); oem_spec
Alternate / superseded numbers	MBKVA5262B (strap kit without breaker) [equivalent]	**A**	same as above
Description	Kit that includes breaker factory-attached to MBKVA5262-type strap and barrier assembly (listed under 'Also for 3VA breaker kits with breaker INCLUDED')	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Current rating, Breaker compatibility		
Open question	*Confirm breaker frame/interrupting/ampere in MBKVAH3250A (M/H letter and 150-250 suffix inferred as interrupting class and ampere, not stated)*		

EDH-SIE-00368	MBKVAM3150A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3150A)

OEM part number	MBKVAM3150A	**A**	S310 p. 1 (part number list); oem_spec
Alternate / superseded numbers	MBKVA5262B (strap kit without breaker) [equivalent]	**A**	same as above
Description	Kit that includes breaker factory-attached to MBKVA5262-type strap and barrier assembly (listed under 'Also for 3VA breaker kits with breaker INCLUDED')	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Current rating, Breaker compatibility		
Open question	*Confirm breaker frame/interrupting/ampere in MBKVAM3150A (M/H letter and 150-250 suffix inferred as interrupting class and ampere, not stated)*		

EDH-SIE-00369	MBKVAM3200A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3200A)

OEM part number	MBKVAM3200A	**A**	S310 p. 1 (part number list); oem_spec
Alternate / superseded numbers	MBKVA5262B (strap kit without breaker) [equivalent]	**A**	same as above
Description	Kit that includes breaker factory-attached to MBKVA5262-type strap and barrier assembly (listed under 'Also for 3VA breaker kits with breaker INCLUDED')	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Current rating, Breaker compatibility		
Open question	*Confirm breaker frame/interrupting/ampere in MBKVAM3200A (M/H letter and 150-250 suffix inferred as interrupting class and ampere, not stated)*		

EDH-SIE-00370	MBKVAM3225A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3225A)

OEM part number	MBKVAM3225A	**A**	S310 p. 1 (part number list); oem_spec
Alternate / superseded numbers	MBKVA5262B (strap kit without breaker) [equivalent]	**A**	same as above
Description	Kit that includes breaker factory-attached to MBKVA5262-type strap and barrier assembly (listed under 'Also for 3VA breaker kits with breaker INCLUDED')	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Current rating, Breaker compatibility		
Open question	*Confirm breaker frame/interrupting/ampere in MBKVAM3225A (M/H letter and 150-250 suffix inferred as interrupting class and ampere, not stated)*		

EDH-SIE-00371	MBKVAM3250A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3250A)

OEM part number	MBKVAM3250A	**A**	S310 p. 1 (part number list); oem_spec
Alternate / superseded numbers	MBKVA5262B (strap kit without breaker) [equivalent]	**A**	same as above
Description	Kit that includes breaker factory-attached to MBKVA5262-type strap and barrier assembly (listed under 'Also for 3VA breaker kits with breaker INCLUDED')	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Current rating, Breaker compatibility		
Open question	*Confirm breaker frame/interrupting/ampere in MBKVAM3250A (M/H letter and 150-250 suffix inferred as interrupting class and ampere, not stated)*		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00019	**4MLKA1A**	Revised P1 400A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00023	**4MLKA1B**	Revised P1 400A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00020	**4MLKA3A**	Revised P1 400A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00024	**4MLKA3B**	Revised P1 400A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00021	**4MLKC1A**	Revised P1 400A CU main/feed-thru lug kit, 1-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00022	**4MLKC3A**	Revised P1 400A CU main/feed-thru lug kit, 3-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00015	**MLKA1A**	Revised P1 250A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00016	**MLKA3A**	Revised P1 250A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00017	**MLKC1A**	Revised P1 250A CU main/feed-thru lug kit, 1-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00018	**MLKC3A**	Revised P1 250A CU main/feed-thru lug kit, 3-ph	n/a (lug kit) **A**	current (2021)

EDH-SIE-00019	4MLKA1A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 1-ph

OEM part number	4MLKA1A	**A**	S165, S262 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKA1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	**A**	S165 equivalent; p.11-15; oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 1-phase (includes neutral)	**A**	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	**A**	same as above
Breaker compatibility	n/a (lug kit)	**A**	same as above
Current rating	400A	**A**	same as above

Kit contents	1 MAIN label; 5/16-18 x 1 SEMS thread-forming screws (4 for 1-ph, 6 for 3-ph); double lugs (2 for 1-ph, 3 for 3-ph); 1 blank filler; 1 350 kcmil lug assembly; 2 1/4-20 Belleville washer nuts; 1 anti-turn plate; 1 600 kcmil lug; 1 1/4-20 x 1 carriage bolt; interphase barrier (0 for 1-ph, 1 for 3-ph)	A	S262 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Fasteners	Each main (double) lug fastened to panel section/main bus with two 5/16-18 x 1 SEMS thread-forming screws; B-phase interphase barrier snapped into bus support slots before lug installation (3-ph)	A	S262 pp. 2-3; oem_spec
Torque values	Per deadfront label (RP1 P1-400 label: main lugs to phase bus 5/16-18 = 144 lb-in)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1108-01 Rev. 01: P1-400 Panelboard Kit 4MLKA1A, 4MLKA3A Main / Feed-thru Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00023 **4MLKA1B** Siemens main-lug-kit **CURRENT (2021)**

Revised P1 400A AL main/feed-thru lug kit, 1-ph

OEM part number	4MLKA1B	A	S165, S264 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 1-phase (includes neutral) (750 kcmil main lug kits introduced with Revised P1 (s8: '750 kcmil Main Lug kits are now available'))	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	1 main lug label; 1/4-20 x 3/4 thread-forming screws (4 for 1-ph, 6 for 3-ph); 750 kcmil main lugs (2/3); 1 blank filler; 1 350 kcmil lug assembly; 2 1/4-20 Belleville washer nuts; 1 anti-turn plate; 1 750 kcmil neutral lug; 1 1/4-20 x 1 carriage bolt	A	S264 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Wire range	Max cable 750 kcmil aluminum; limited to 600 kcmil copper	A	S264 pp. 2-3; oem_spec
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Fasteners	Each main lug fastened with two 1/4-20 x 3/4 thread-forming screws	A	S264 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1110-01 Rev. 01: P1-400 Panelboard Kit 4MLKA1B, 4MLKA3B 750 kcmil Main / Feed-thru Lugs Instructions	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU]	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00020 **4MLKA3A** Siemens main-lug-kit **CURRENT (2021)**

Revised P1 400A AL main/feed-thru lug kit, 3-ph

OEM part number	4MLKA3A	A	S165, S262 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec

Alternate / superseded numbers	4MLKA3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S165 equivalent; p.11-15; oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 3-phase (includes neutral)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	1 MAIN label; 5/16-18 x 1 SEMS thread-forming screws (4 for 1-ph, 6 for 3-ph); double lugs (2 for 1-ph, 3 for 3-ph); 1 blank filler; 1 350 kcmil lug assembly; 2 1/4-20 Belleville washer nuts; 1 anti-turn plate; 1 600 kcmil lug; 1 1/4-20 x 1 carriage bolt; interphase barrier (0 for 1-ph, 1 for 3-ph)	A	S262 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Fasteners	Each main (double) lug fastened to panel section/main bus with two 5/16-18 x 1 SEMS thread-forming screws; B-phase interphase barrier snapped into bus support slots before lug installation (3-ph)	A	S262 pp. 2-3; oem_spec
Torque values	Per deadfront label (RP1 P1-400 label: main lugs to phase bus 5/16-18 = 144 lb-in)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1108-01 Rev. 01: P1-400 Panelboard Kit 4MLKA1A, 4MLKA3A Main / Feed-thru Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00024	4MLKA3B	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 3-ph

OEM part number	4MLKA3B	A	S165, S264 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 3-phase (includes neutral) (750 kcmil main lug kits introduced with Revised P1 (s8: '750 kcmil Main Lug kits are now available'))	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	1 main lug label; 1/4-20 x 3/4 thread-forming screws (4 for 1-ph, 6 for 3-ph); 750 kcmil main lugs (2/3); 1 blank filler; 1 350 kcmil lug assembly; 2 1/4-20 Belleville washer nuts; 1 anti-turn plate; 1 750 kcmil neutral lug; 1 1/4-20 x 1 carriage bolt	A	S264 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Wire range	Max cable 750 kcmil aluminum; limited to 600 kcmil copper	A	S264 pp. 2-3; oem_spec
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Fasteners	Each main lug fastened with two 1/4-20 x 3/4 thread-forming screws	A	S264 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1110-01 Rev. 01: P1-400 Panelboard Kit 4MLKA1B, 4MLKA3B 750 kcmil Main / Feed-thru Lugs Instructions	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU]	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00021	4MLKC1A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A CU main/feed-thru lug kit, 1-ph

OEM part number	4MLKC1A	A	S165, S263 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKC1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S165 equivalent; p.11-15; oem_spec
Description	Revised P1 400A CU main or feed-thru lug kit, 1-phase (includes neutral)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	1 400A MAIN LUG label; 5/16-18 x 3/4 SEMS thread-forming screws (4 for 1-ph, 6 for 3-ph); main lug pad assemblies (2/3); 1 blank filler; 1 service ground electrode lug assembly; 1/4-20 Belleville washer nuts (5/6); 1 1/4-20 x 1 carriage bolt; 1 neutral lug pad assembly; 600 kcmil lugs (3 for 1-ph, 4 for 3-ph)	A	S263 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Wire range	Single 600 kcmil max copper conductor only	A	S263 pp. 2-3; oem_spec
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
	Copper lugs	A	S263 pp. 2-3; oem_spec

Fasteners	Each main lug pad assembly fastened with two 5/16-18 x 3/4 SEMS screws; 600 kcmil lug on pad stud with 1/4-20 Belleville nut; neutral lug pad on riser via carriage bolt (half-shear acts as anti-turn)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1109-01 Rev. 00: P1-400 Panelboard Kit 4MLKC1A, 4MLKC3A Copper Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) 1/0-600 kcmil, CU cable only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00022 **4MLKC3A** Siemens main-lug-kit **CURRENT (2021)**

Revised P1 400A CU main/feed-thru lug kit, 3-ph

OEM part number	4MLKC3A	A	S165, S263 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKC3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S165 equivalent; p.11-15; oem_spec
Description	Revised P1 400A CU main or feed-thru lug kit, 3-phase (includes neutral)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	1 400A MAIN LUG label; 5/16-18 x 3/4 SEMS thread-forming screws (4 for 1-ph, 6 for 3-ph); main lug pad assemblies (2/3); 1 blank filler; 1 service ground electrode lug assembly; 1/4-20 Belleville washer nuts (5/6); 1 1/4-20 x 1 carriage bolt; 1 neutral lug pad assembly; 600 kcmil lugs (3 for 1-ph, 4 for 3-ph)	A	S263 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Wire range	Single 600 kcmil max copper conductor only	A	S263 pp. 2-3; oem_spec
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
	Copper lugs	A	S263 pp. 2-3; oem_spec
Fasteners	Each main lug pad assembly fastened with two 5/16-18 x 3/4 SEMS screws; 600 kcmil lug on pad stud with 1/4-20 Belleville nut; neutral lug pad on riser via carriage bolt (half-shear acts as anti-turn)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1109-01 Rev. 00: P1-400 Panelboard Kit 4MLKC1A, 4MLKC3A Copper Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) 1/0-600 kcmil, CU cable only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00015 **MLKA1A** Siemens main-lug-kit **CURRENT (2021)**

Revised P1 250A AL main/feed-thru lug kit, 1-ph

OEM part number	MLKA1A	A	S165, S259 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	MLKA1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S165 equivalent; p.11-15; oem_spec
Description	Revised P1 250A AL main or feed-thru lug kit, 1-phase (includes neutral)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above

	Main lugs (remove pressed-in main stud if installed) or feed-thru lugs (panels with feed-thru/subfeed space only)	A	S259 pp. 2-3; oem_spec
Breaker compatibility	n/a (lug kit)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Current rating	250A	A	same as above
	Labels supplied to mark main lug ampacity 125 A or 250 A	A	S259 pp. 2-3; oem_spec
Kit contents	1 main lug assembly set (qty per phase: 2 for 1-ph, 3 for 3-ph Belleville nuts), blank filler, 125A and 250A main lug labels, 1 neutral lug assembly, 1/4-20 Belleville washer nuts (qty 2 1-ph / 3-ph 3) plus 1 for neutral	A	same as above
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Fasteners	Main lug assemblies have pressed-in studs that pass through the main bus from underneath; fastened with 1/4-20 Belleville washer nuts. Neutral lug assembly under neutral cross bar, stud through bus, 1/4-20 Belleville nut.	A	S259 pp. 2-3; oem_spec
Torque values	Per deadfront Hardware Tightening Torque label (RP1 label: main copper lugs to phase bus 1/4-20 = 72 lb-in)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1105-01 Rev. 00: P1-250 Panelboard Kit MLKA1A & MLKA3A Main / Feed Thru Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00016	**MLKA3A**	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 250A AL main/feed-thru lug kit, 3-ph

OEM part number	MLKA3A	A	S165, S259 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	MLKA3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S165 equivalent; p.11-15; oem_spec
Description	Revised P1 250A AL main or feed-thru lug kit, 3-phase (includes neutral)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
	Main lugs (remove pressed-in main stud if installed) or feed-thru lugs (panels with feed-thru/subfeed space only)	A	S259 pp. 2-3; oem_spec
Breaker compatibility	n/a (lug kit)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Current rating	250A	A	same as above
	Labels supplied to mark main lug ampacity 125 A or 250 A	A	S259 pp. 2-3; oem_spec
Kit contents	1 main lug assembly set (qty per phase: 2 for 1-ph, 3 for 3-ph Belleville nuts), blank filler, 125A and 250A main lug labels, 1 neutral lug assembly, 1/4-20 Belleville washer nuts (qty 2 1-ph / 3-ph 3) plus 1 for neutral	A	same as above
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Fasteners	Main lug assemblies have pressed-in studs that pass through the main bus from underneath; fastened with 1/4-20 Belleville washer nuts. Neutral lug assembly under neutral cross bar, stud through bus, 1/4-20 Belleville nut.	A	S259 pp. 2-3; oem_spec

Torque values	Per deadfront Hardware Tightening Torque label (RP1 label: main copper lugs to phase bus 1/4-20 = 72 lb-in)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1105-01 Rev. 00: P1-250 Panelboard Kit MLKA1A & MLKA3A Main / Feed Thru Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00017 **MLKC1A** Siemens main-lug-kit **CURRENT (2021)**

Revised P1 250A CU main/feed-thru lug kit, 1-ph

OEM part number	MLKC1A	A	S165, S260 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	MLKC1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S165 equivalent; p.11-15; oem_spec
Description	Revised P1 250A CU main or feed-thru lug kit, 1-phase (includes neutral)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Kit contents	Main lug assemblies (2 for 1-ph, 3 for 3-ph); 1 blank filler; 125A and 250A main lug labels; 1 neutral lug assembly; 1/4-20 x 1/2 hex head SEMS assembly screws (2 for 1-ph, 3 for 3-ph); 1 5/16-18 x 3/4 slotted hex washer thread-forming screw	A	S260 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
	Copper lugs	A	S260 pp. 2-3; oem_spec
Fasteners	Main lug assemblies placed under exposed main bus, fastened with 1/4-20 x 1/2 hex head SEMS screws; neutral lug on top of neutral cross bus with 5/16-18 thread-forming screw	A	same as above
Torque values	Per Hardware Tightening Torque label (RP1: main Cu lugs to phase bus 1/4-20 = 72 lb-in; Cu/compression neutral lugs to cross bus 5/16-18 = 72 lb-in Cu / 108 lb-in Al)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1106-01 Rev. 00: P1-250 Panelboard Kit MLKC1A & MLKC3A Main / Feed-thru (copper) Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
	Insulating barrier on B-phase only; caution: barrier must not be clamped in bolted joint	A	S260 pp. 2-3; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00018 **MLKC3A** Siemens main-lug-kit **CURRENT (2021)**

Revised P1 250A CU main/feed-thru lug kit, 3-ph

OEM part number	MLKC3A	A	S165, S260 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	MLKC3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S165 equivalent; p.11-15; oem_spec
Description	Revised P1 250A CU main or feed-thru lug kit, 3-phase (includes neutral)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above

Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Kit contents	Main lug assemblies (2 for 1-ph, 3 for 3-ph); 1 blank filler; 125A and 250A main lug labels; 1 neutral lug assembly; 1/4-20 x 1/2 hex head SEMS assembly screws (2 for 1-ph, 3 for 3-ph); 1 5/16-18 x 3/4 slotted hex washer thread-forming screw	A	S260 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
	Copper lugs	A	S260 pp. 2-3; oem_spec
Fasteners	Main lug assemblies placed under exposed main bus, fastened with 1/4-20 x 1/2 hex head SEMS screws; neutral lug on top of neutral cross bus with 5/16-18 thread-forming screw	A	same as above
Torque values	Per Hardware Tightening Torque label (RP1: main Cu lugs to phase bus 1/4-20 = 72 lb-in; Cu/compression neutral lugs to cross bus 5/16-18 = 72 lb-in Cu / 108 lb-in Al)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1106-01 Rev. 00: P1-250 Panelboard Kit MLKC1A & MLKC3A Main / Feed-thru (copper) Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S165 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
	Insulating barrier on B-phase only; caution: barrier must not be clamped in bolted joint	A	S260 pp. 2-3; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00097	**P1CONACPHAL**	RP1 A/C-phase replacement aluminum branch connectors, kit of 6	BL / BQD / GB type breakers, 1-ph or 3-ph A	unknown - may be discontinued (only CU A/C kit listed 2021,
EDH-SIE-00088	**P1CONACPHCU**	RP1 A/C-phase replacement copper branch connectors	BL / BQD / GB type breakers, 1-ph or 3-ph A	listed (2021)
EDH-SIE-00089	**P1CONBPHAL**	RP1 B-phase replacement aluminum branch connectors	BL / BQD / GB type breakers, 3-phase A	listed (2021)
EDH-SIE-00090	**P1CONBPHCU**	RP1 B-phase replacement copper branch connectors	BL / BQD / GB type breakers, 3-phase A	listed (2021)

EDH-SIE-00097	P1CONACPHAL	Siemens	connector-strap	UNKNOWN - MAY BE DISCO

RP1 A/C-phase replacement aluminum branch connectors, kit of 6

OEM part number	P1CONACPHAL	A	S165, S270 oem_spec
Description	A- or C-phase aluminum connector kit, 6 pieces (search-summary of a Siemens spec sheet) (Not present in SpeedFax 2021 p.11-21 table; reported in a web search summary of stoneway.com Siemens spec sheet (page returned HTML, not retrievable))	C	S165 distributor
Breaker compatibility	BL / BQD / GB type breakers, 1-ph or 3-ph	A	S270 pp. 2-3; oem_spec
Kit contents	6 A/C-phase connectors; 6 #10-24 x 9/16 hex washer head screws; 12 #10-32 x 5/16 hex head SEMS screws	A	same as above
Material	aluminum connector (suffix AL)	A	same as above
Torque values	#10-24 connector to bus: 25 lb-in (1/8 in Cu bus), 30 (3/16 in Al), 50 (3/16 in Cu), 30 (1/4 in Al); #10-32 breaker SEMS 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1119-01 Rev. 00: P1 Panelboard Replacement Parts Kit P1CONACPHAL & P1CONACPHCU A/C-Phase Connector Kits Instructions	A	same as above
Status	unknown - may be discontinued (only CU A/C kit listed 2021, 'Also can be used to replace AL A/C-Phase Connectors')	C	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		
Open question	*Confirm P1CONACPHAL exists as an OEM catalog number*		

EDH-SIE-00088	P1CONACPHCU	Siemens	connector-strap	LISTED (2021)

RP1 A/C-phase replacement copper branch connectors

OEM part number	P1CONACPHCU	A	S165, S270 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 A/C-phase replacement copper branch connectors, kit of 6 pcs plus mounting hardware; can also replace AL A/C-phase connectors	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	B	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL / BQD / GB type breakers, 1-ph or 3-ph	A	S270 pp. 2-3; oem_spec
	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	B	S165 p.11-16; inference
Kit contents	qty/kit 6	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	6 A/C-phase connectors; 6 #10-24 x 9/16 hex washer head screws; 12 #10-32 x 5/16 hex head SEMS screws	A	S270 pp. 2-3; oem_spec
Material	copper	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	copper connector (suffix CU)	A	S270 pp. 2-3; oem_spec
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	B	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Torque values	#10-24 connector to bus: 25 lb-in (1/8 in Cu bus), 30 (3/16 in Al), 50 (3/16 in Cu), 30 (1/4 in Al); #10-32 breaker SEMS 20 lb-in	A	S270 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1119-01 Rev. 00: P1 Panelboard Replacement Parts Kit P1CONACPHAL & P1CONACPHCU A/C-Phase Connector Kits Instructions	A	same as above
Status	listed (2021)	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2572-02	A	same as above

Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		
Open question	*Connector geometry differs between A/C and B phase; is AL A/C-phase kit (P1CONACPHAL) still offered? Earlier web listings name P1CONACPHAL but 2021 SpeedFax omits it.*		

EDH-SIE-00089 **P1CONBPHAL** Siemens connector-strap **LISTED (2021)**

RP1 B-phase replacement aluminum branch connectors

OEM part number	P1CONBPHAL	A	S165, S271 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 B-phase replacement aluminum branch connectors, kit of 6 pcs plus mounting hardware	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	B	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL / BQD / GB type breakers, 3-phase	A	S271 pp. 2-3; oem_spec
	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	B	S165 p.11-16; inference
Kit contents	qty/kit 6	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	6 B-phase connectors; 6 #10-24 x 9/16 hex washer head screws; 12 #10-32 x 5/16 hex head SEMS screws	A	S271 pp. 2-3; oem_spec
Material	aluminum	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	B	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Torque values	#10-24 to bus 25 (1/8 Cu) / 30 (3/16 Al) / 50 (3/16 Cu) / 30 (1/4 Al) lb-in; #10-32 SEMS 20 lb-in	A	S271 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1122-01 Rev. 00: P1 Panelboard Replacement Parts Kit P1CONBPHAL & P1CONBPHCU B-Phase Connector Kits Instructions	A	same as above
Status	listed (2021)	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2573-01	A	same as above
	Anti-turn feature on bottom of each B-phase connector; aluminum and copper versions mount differently (Fig. 1 Al, Fig. 2 Cu)	A	S271 pp. 2-3; oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00090 **P1CONBPHCU** Siemens connector-strap **LISTED (2021)**

RP1 B-phase replacement copper branch connectors

OEM part number	P1CONBPHCU	A	S165, S271 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 B-phase replacement copper branch connectors, kit of 6 pcs plus mounting hardware	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	B	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL / BQD / GB type breakers, 3-phase	A	S271 pp. 2-3; oem_spec
	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	B	S165 p.11-16; inference

Kit contents	qty/kit 6	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	6 B-phase connectors; 6 #10-24 x 9/16 hex washer head screws; 12 #10-32 x 5/16 hex head SEMS screws	A	S271 pp. 2-3; oem_spec
Material	copper	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	B	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Torque values	#10-24 to bus 25 (1/8 Cu) / 30 (3/16 Al) / 50 (3/16 Cu) / 30 (1/4 Al) lb-in; #10-32 SEMS 20 lb-in	A	S271 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1122-01 Rev. 00: P1 Panelboard Replacement Parts Kit P1CONBPHAL & P1CONBPHCU B-Phase Connector Kits Instructions	A	same as above
Status	listed (2021)	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2573-02	A	same as above
	Anti-turn feature on bottom of each B-phase connector; aluminum and copper versions mount differently (Fig. 1 Al, Fig. 2 Cu)	A	S271 pp. 2-3; oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00320	**2NLK30A**	Revised P1-250 200% neutral lug kit, 30-circuit	—	unknown
EDH-SIE-00321	**2NLK42A**	Revised P1-250 200% neutral lug kit, 42-circuit	—	unknown
EDH-SIE-00040	**2NLK42B**	RP1 250A 200% neutral lug kit	—	current (2021); Revised P1 only
EDH-SIE-00322	**2NLK54A**	Revised P1-250 200% neutral lug kit, 54-circuit	—	unknown
EDH-SIE-00041	**2NLK54B**	RP1 250A 200% neutral lug kit	—	current (2021); Revised P1 only
EDH-SIE-00323	**42NLK30A**	Revised P1-400 200% neutral kit, 30-circuit	—	unknown
EDH-SIE-00324	**42NLK42A**	Revised P1-400 200% neutral kit, 42-circuit	—	unknown
EDH-SIE-00325	**42NLK54A**	Revised P1-400 200% neutral kit, 54-circuit	—	unknown
EDH-SIE-00042	**42NLK54B**	RP1 400A 200% neutral lug kit	—	current (2021); Revised P1 only
EDH-SIE-00314	**CNLK30A**	Revised P1-250 copper neutral lug kit, 30-circuit (250 A, Cu cable only)	—	unknown
EDH-SIE-00315	**CNLK42A**	Revised P1-250 copper neutral lug kit, 42-circuit (250 A, Cu cable only)	—	unknown
EDH-SIE-00038	**CNLK42B**	RP1 CU neutral lug kit 42B	—	current (2021); Revised P1 only
EDH-SIE-00316	**CNLK54A**	Revised P1-250 copper neutral lug kit, 54-circuit (250 A, Cu cable only)	—	unknown
EDH-SIE-00039	**CNLK54B**	RP1 CU neutral lug kit 54B	—	current (2021); Revised P1 only
EDH-SIE-00317	**LNLK30A**	Revised P1 2/0 neutral lug (strip) kit, 30-circuit	—	unknown
EDH-SIE-00318	**LNLK42A**	Revised P1 2/0 neutral lug (strip) kit, 42-circuit	—	unknown
EDH-SIE-00035	**LNLK4X11B**	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long	—	current (2021); Revised P1 only
EDH-SIE-00319	**LNLK54A**	Revised P1 2/0 neutral lug (strip) kit, 54-circuit	—	unknown
EDH-SIE-00033	**LNLK5X12A**	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]	—	current (2021); Revised P1 only
EDH-SIE-00036	**LNLK6X17B**	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	—	current (2021); Revised P1 only
EDH-SIE-00034	**LNLK7X18A**	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]	—	current (2021); Revised P1 only

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00037	**LNLK7X20B**	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	—	current (2021); Revised P1 only

EDH-SIE-00320	**2NLK30A**	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-250 200% neutral lug kit, 30-circuit

OEM part number	2NLK30A	A	S258 pp. 2-3; oem_spec
Description	200% rated neutral kit for Revised P1-250 (harmonic loads); requires doubled line cables/connectors.	A	same as above
Kit contents	Neutral connector strips (Cu cable only) qty 2 or 4; #10-24 x 1-1/8 socket head cap thread-forming screws qty 4 or 8; 2 neutral lug assemblies; 2 1/4-20 Belleville washer nuts; 1 200% neutral label	A	same as above
Fasteners	Lug sub-assembly under neutral cross bus, exposed stud from beneath, 1/4-20 Belleville washer nut	A	same as above
Torque values	Per Hardware Tightening Torque label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1104-01 Rev. 00: P1-250 Panelboard Kit 2NLK30A, 2NLK42A & 2NLK54A 200% Neutral Lug Kits Installation Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00321	**2NLK42A**	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-250 200% neutral lug kit, 42-circuit

OEM part number	2NLK42A	A	S258 pp. 2-3; oem_spec
Description	200% rated neutral kit for Revised P1-250 (harmonic loads); requires doubled line cables/connectors.	A	same as above
Kit contents	Neutral connector strips (Cu cable only) qty 2 or 4; #10-24 x 1-1/8 socket head cap thread-forming screws qty 4 or 8; 2 neutral lug assemblies; 2 1/4-20 Belleville washer nuts; 1 200% neutral label	A	same as above
Fasteners	Lug sub-assembly under neutral cross bus, exposed stud from beneath, 1/4-20 Belleville washer nut	A	same as above
Torque values	Per Hardware Tightening Torque label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1104-01 Rev. 00: P1-250 Panelboard Kit 2NLK30A, 2NLK42A & 2NLK54A 200% Neutral Lug Kits Installation Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00040	**2NLK42B**	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 250A 200% neutral lug kit

OEM part number	2NLK42B	A	S165, S321 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	2NLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S165, S171 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	2NLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 250A 200% neutral lug kit: CU strips (2 short, 2 long; 17 & 25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware; 200% kits require CU neutrals	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
	2NLK42B for 18/30/42 ckt; 2NLK54B for 54/66 ckt; 200% neutral requires doubled line cables	A	S321 pp. 2-3; oem_spec
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S165 pp.11-8, 11-9; inference
Current rating	250A (18, 30, 42 ckt)	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 250A 200% neutral lug kit: CU strips (2 short, 2 long; 17 & 25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware; 200% kits require CU neutrals	A	same as above

	4 RP1-250 copper neutral riser extensions; 8 #10-24 x 9/16 HWH thread-forming; 8 #10-24 x 1-1/8 socket cap thread-forming; 2 250A neutral lug assemblies; 200% neutral label; copper neutral strip lugs short (2 / 0) and long (2 / 4) for 2NLK42B / 2NLK54B	A	S321 pp. 2-3; oem_spec
Material	copper neutral strips	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	Copper riser extensions and strip lugs	A	S321 pp. 2-3; oem_spec
Torque values	#10-24: 30 lb-in (3/16 in Al), 25 lb-in (1/8 in Cu); 250A neutral lug Belleville nut 72 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1034-01 Rev. 00: 2NLK42B or 2NLK54B 200% Neutral Lug Kit for P1-250 Panels (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00322	2NLK54A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-250 200% neutral lug kit, 54-circuit

OEM part number	2NLK54A	A	S258 pp. 2-3; oem_spec
Description	200% rated neutral kit for Revised P1-250 (harmonic loads); requires doubled line cables/connectors.	A	same as above
Kit contents	Neutral connector strips (Cu cable only) qty 2 or 4; #10-24 x 1-1/8 socket head cap thread-forming screws qty 4 or 8; 2 neutral lug assemblies; 2 1/4-20 Belleville washer nuts; 1 200% neutral label	A	same as above
Fasteners	Lug sub-assembly under neutral cross bus, exposed stud from beneath, 1/4-20 Belleville washer nut	A	same as above
Torque values	Per Hardware Tightening Torque label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1104-01 Rev. 00: P1-250 Panelboard Kit 2NLK30A, 2NLK42A & 2NLK54A 200% Neutral Lug Kits Installation Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00041	2NLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 250A 200% neutral lug kit

OEM part number	2NLK54B	A	S165, S321 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	2NLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S165, S171 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 250A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
	2NLK42B for 18/30/42 ckt; 2NLK54B for 54/66 ckt; 200% neutral requires doubled line cables	A	S321 pp. 2-3; oem_spec
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S165 pp.11-8, 11-9; inference
Current rating	250A (54, 66 ckt)	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 250A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware	A	same as above
	4 RP1-250 copper neutral riser extensions; 8 #10-24 x 9/16 HWH thread-forming; 8 #10-24 x 1-1/8 socket cap thread-forming; 2 250A neutral lug assemblies; 200% neutral label; copper neutral strip lugs short (2 / 0) and long (2 / 4) for 2NLK42B / 2NLK54B	A	S321 pp. 2-3; oem_spec

Material	copper neutral strips	**A**	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	Copper riser extensions and strip lugs	**A**	S321 pp. 2-3; oem_spec
Torque values	#10-24: 30 lb-in (3/16 in Al), 25 lb-in (1/8 in Cu); 250A neutral lug Belleville nut 72 lb-in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1034-01 Rev. 00: 2NLK42B or 2NLK54B 200% Neutral Lug Kit for P1-250 Panels (Revised P1 only)	**A**	same as above
Status	current (2021); Revised P1 only	**A**	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00323 — 42NLK30A — Siemens lineage — neutral-assembly — STATUS UNKNOWN

Revised P1-400 200% neutral kit, 30-circuit

OEM part number	42NLK30A	**A**	S261 pp. 2-3; oem_spec
Description	200% rated neutral kit for Revised P1 400 A; provides a second 600 kcmil neutral line lug for doubled cabling (42NLK54A also for 66 ckt).	**A**	same as above
Kit contents	Branch neutral connector strips (Cu only) qty 2 (30/42) or 4 (54); 1 600 kcmil neutral lug; 1 service ground electrode lug; 2 #10-24 x 9/16 thread-forming screws; 1 1/4-20 x 1 carriage bolt; 1 1/4-20 Belleville washer nut; 1 anti-turn plate; #10-24 x 1-1/8 socket head thread-forming screws qty 4 or 8; 1 200% label	**A**	same as above
Fasteners	600 kcmil lug on 1/4-20 x 1 carriage bolt through square hole of neutral riser with anti-turn plate and 1/4-20 Belleville nut; strips to risers with #10-24 x 1-1/8	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1107-01 Rev. 01: P1-400 Panelboard Kit 42NLK30A, 42NLK42A, 42NLK54A Installation Instructions with 200% Neutral	**A**	same as above
Cross-links	Families: RP1		

EDH-SIE-00324 — 42NLK42A — Siemens lineage — neutral-assembly — STATUS UNKNOWN

Revised P1-400 200% neutral kit, 42-circuit

OEM part number	42NLK42A	**A**	S261 pp. 2-3; oem_spec
Description	200% rated neutral kit for Revised P1 400 A; provides a second 600 kcmil neutral line lug for doubled cabling (42NLK54A also for 66 ckt).	**A**	same as above
Kit contents	Branch neutral connector strips (Cu only) qty 2 (30/42) or 4 (54); 1 600 kcmil neutral lug; 1 service ground electrode lug; 2 #10-24 x 9/16 thread-forming screws; 1 1/4-20 x 1 carriage bolt; 1 1/4-20 Belleville washer nut; 1 anti-turn plate; #10-24 x 1-1/8 socket head thread-forming screws qty 4 or 8; 1 200% label	**A**	same as above
Fasteners	600 kcmil lug on 1/4-20 x 1 carriage bolt through square hole of neutral riser with anti-turn plate and 1/4-20 Belleville nut; strips to risers with #10-24 x 1-1/8	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1107-01 Rev. 01: P1-400 Panelboard Kit 42NLK30A, 42NLK42A, 42NLK54A Installation Instructions with 200% Neutral	**A**	same as above
Cross-links	Families: RP1		

EDH-SIE-00325	42NLK54A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-400 200% neutral kit, 54-circuit

OEM part number	42NLK54A	A	S261 pp. 2-3; oem_spec
Description	200% rated neutral kit for Revised P1 400 A; provides a second 600 kcmil neutral line lug for doubled cabling (42NLK54A also for 66 ckt).	A	same as above
Kit contents	Branch neutral connector strips (Cu only) qty 2 (30/42) or 4 (54); 1 600 kcmil neutral lug; 1 service ground electrode lug; 2 #10-24 x 9/16 thread-forming screws; 1 1/4-20 x 1 carriage bolt; 1 1/4-20 Belleville washer nut; 1 anti-turn plate; #10-24 x 1-1/8 socket head thread-forming screws qty 4 or 8; 1 200% label	A	same as above
Fasteners	600 kcmil lug on 1/4-20 x 1 carriage bolt through square hole of neutral riser with anti-turn plate and 1/4-20 Belleville nut; strips to risers with #10-24 x 1-1/8	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1107-01 Rev. 01: P1-400 Panelboard Kit 42NLK30A, 42NLK42A, 42NLK54A Installation Instructions with 200% Neutral	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00042	42NLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 400A 200% neutral lug kit

OEM part number	42NLK54B	A	S165, S322 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	42NLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S165, S171 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	42NLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
	42NLK54A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 400A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lugs (600 kcmil and 300 kcmil) and hardware	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
	30, 42, 54 or 66 circuit P1-400 panels (only 2 of the 4 strip lugs used on 30-circuit); provides second 600 kcmil neutral line lug	A	S322 pp. 2-3; oem_spec
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S165 pp.11-8, 11-9; inference
Current rating	all 400A (30, 54, 66 ckt)	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 400A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lugs (600 kcmil and 300 kcmil) and hardware	A	same as above
	4 copper neutral strip lugs, long; 8 #10-24 x 1-1/8 socket cap thread-forming; 1 1/4-20 x 1 carriage bolt; 1 anti-turn plate; 1 1/4-20 Belleville washer nut; 1 600 kcmil lug with anti-turn; 1 service ground electrode assembly; 2 #10-24 x 9/16 HWH thread-forming; 1 200% neutral label	A	S322 pp. 2-3; oem_spec
Material	copper neutral strips	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Torque values	#10-24: 30 lb-in (1/4 in Al) / 50 lb-in (3/16 in Cu); Belleville nut 72 lb-in	A	S322 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1035-01 Rev. 00: 42NLK54B 200% Neutral Lug Kit for 30, 42, 54 or 66 Circuit P1-400 Panels (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00314	CNLK30A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-250 copper neutral lug kit, 30-circuit (250 A, Cu cable only)

OEM part number	CNLK30A	A	S256 pp. 2-3; oem_spec
Description	Optional copper (mechanical connector) neutral kit for Revised P1 (catalog ends N or T) 1-ph 3-w / 3-ph 4-w; CNLK**A kits cover 18/30/42/54/66 circuits (CNLK30A also for 18-ckt, CNLK54A also for 66-ckt). Also usable at P1-400 subfeed end.	A	same as above
Kit contents	1 line lug assembly (Cu cable only); neutral connector strips (Cu only) qty 2 (18/30/42 ckt) or 4 (54/66 ckt); 1 5/16-18 hex washer head thread-forming screw; #10-24 socket cap head thread-forming screws qty 4 or 8; 1 anti-turn plate; 1 1/4-20 x 1/2 hex washer head thread-forming screw; 1 1/4-20 x 1 carriage bolt; 1 1/4-20 Belleville washer nut	A	same as above
Material	Copper (for copper cable only)	A	same as above
Fasteners	P1-250: lug sub-assembly on top of neutral cross bus with 5/16-18 thread-forming screw; P1-400 subfeed: lug under riser on 1/4-20 x 1 carriage bolt + anti-turn plate + 1/4-20 Belleville nut, 1/4-20 x 1/2 screw through anti-turn plate into riser; strips with #10-24 thread-forming screws	A	same as above
Torque values	Per Hardware Tightening Torque label on rear of deadfront (see RP1 torque label 11-D-1030-01)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1102-01 Rev. 00: P1-250 Panelboard Kit CNLK30A, CNLK42A & CNLK54A 250A Copper Neutral Lug Kits Installation Instructions (also for P1-400 subfeed)	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00315	CNLK42A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-250 copper neutral lug kit, 42-circuit (250 A, Cu cable only)

OEM part number	CNLK42A	A	S256 pp. 2-3; oem_spec
Description	Optional copper (mechanical connector) neutral kit for Revised P1 (catalog ends N or T) 1-ph 3-w / 3-ph 4-w; CNLK**A kits cover 18/30/42/54/66 circuits (CNLK30A also for 18-ckt, CNLK54A also for 66-ckt). Also usable at P1-400 subfeed end.	A	same as above
Kit contents	1 line lug assembly (Cu cable only); neutral connector strips (Cu only) qty 2 (18/30/42 ckt) or 4 (54/66 ckt); 1 5/16-18 hex washer head thread-forming screw; #10-24 socket cap head thread-forming screws qty 4 or 8; 1 anti-turn plate; 1 1/4-20 x 1/2 hex washer head thread-forming screw; 1 1/4-20 x 1 carriage bolt; 1 1/4-20 Belleville washer nut	A	same as above
Material	Copper (for copper cable only)	A	same as above
Fasteners	P1-250: lug sub-assembly on top of neutral cross bus with 5/16-18 thread-forming screw; P1-400 subfeed: lug under riser on 1/4-20 x 1 carriage bolt + anti-turn plate + 1/4-20 Belleville nut, 1/4-20 x 1/2 screw through anti-turn plate into riser; strips with #10-24 thread-forming screws	A	same as above
Torque values	Per Hardware Tightening Torque label on rear of deadfront (see RP1 torque label 11-D-1030-01)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1102-01 Rev. 00: P1-250 Panelboard Kit CNLK30A, CNLK42A & CNLK54A 250A Copper Neutral Lug Kits Installation Instructions (also for P1-400 subfeed)	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00038	CNLK42B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 CU neutral lug kit 42B

OEM part number	CNLK42B	A	S165, S320 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	CNLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S165, S171 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	CNLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 CU neutral lug kit 42B: 2 short & 2 long CU strips (17 & 25 pos), CU riser extension and all hardware; CU strips 1/0 max, CU cable only	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above

	RP1-250: CNLK42B for 18/30/42 ckt, CNLK54B for 54/66 ckt; RP1-400: CNLK54B for all circuit sizes	A	S320 pp. 2-3; oem_spec
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S165 pp.11-8, 11-9; inference
Current rating	250A (18, 30, 42 ckt)	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 CU neutral lug kit 42B: 2 short & 2 long CU strips (17 & 25 pos), CU riser extension and all hardware; CU strips 1/0 max, CU cable only	A	same as above
	4 RP1-250 copper neutral riser extensions; #10-24 x 9/16 HWH thread-forming (8 / 10); 8 #10-24 x 1-1/8 socket cap thread-forming; 1/4-20 x 1/2 HWH thread-forming; 1/4-20 x 1 carriage bolt; anti-turn plate; 1/4-20 Belleville washer nut; 600 kcmil copper lug assembly (RP1-400); RP1 service ground electrode assembly; 250A copper lug assembly (RP1-250); copper neutral strip lugs long and short	A	S320 pp. 2-3; oem_spec
Material	copper neutral strips	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	Copper	A	S320 pp. 2-3; oem_spec
Torque values	#10-24: 30 (Al 3/16, 1/4), 25 (Cu 1/8), 50 (Cu 3/16) lb-in; 1/4-20 x 1/2: 30/50/50/72; Belleville nut 72; 5/16-18 thread-forming 108 (Al) / 72 (Cu) lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1033-01 Rev. 00: CNLK42B or CNLK54B Copper Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Identification features	For 3VA41/xGB RP1-250 panels, aluminum neutral riser extensions are replaced by the copper ones in the kit; BL/BQD/older xGB RP1-250 and all RP1-400 mount strips directly on riser	A	S320 pp. 2-3; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00316 CNLK54A — Siemens lineage — neutral-assembly — STATUS UNKNOWN

Revised P1-250 copper neutral lug kit, 54-circuit (250 A, Cu cable only)

OEM part number	CNLK54A	A	S256 pp. 2-3; oem_spec
Description	Optional copper (mechanical connector) neutral kit for Revised P1 (catalog ends N or T) 1-ph 3-w / 3-ph 4-w; CNLK**A kits cover 18/30/42/54/66 circuits (CNLK30A also for 18-ckt, CNLK54A also for 66-ckt). Also usable at P1-400 subfeed end.	A	same as above
Kit contents	1 line lug assembly (Cu cable only); neutral connector strips (Cu only) qty 2 (18/30/42 ckt) or 4 (54/66 ckt); 1 5/16-18 hex washer head thread-forming screw; #10-24 socket cap head thread-forming screws qty 4 or 8; 1 anti-turn plate; 1 1/4-20 x 1/2 hex washer head thread-forming screw; 1 1/4-20 x 1 carriage bolt; 1 1/4-20 Belleville washer nut	A	same as above
Material	Copper (for copper cable only)	A	same as above
Fasteners	P1-250: lug sub-assembly on top of neutral cross bus with 5/16-18 thread-forming screw; P1-400 subfeed: lug under riser on 1/4-20 x 1 carriage bolt + anti-turn plate + 1/4-20 Belleville nut, 1/4-20 x 1/2 screw through anti-turn plate into riser; strips with #10-24 thread-forming screws	A	same as above
Torque values	Per Hardware Tightening Torque label on rear of deadfront (see RP1 torque label 11-D-1030-01)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1102-01 Rev. 00: P1-250 Panelboard Kit CNLK30A, CNLK42A & CNLK54A 250A Copper Neutral Lug Kits Installation Instructions (also for P1-400 subfeed)	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00039 CNLK54B — Siemens — neutral-assembly — CURRENT (2021); REVISE

RP1 CU neutral lug kit 54B

OEM part number	CNLK54B	A	S165, S320 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec

Alternate / superseded numbers	CNLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S165, S171 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 CU neutral lug kit 54B: 4 long CU strips (25 pos), CU riser extension and hardware; 1/0 max, CU cable only	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
	RP1-250: CNLK42B for 18/30/42 ckt, CNLK54B for 54/66 ckt; RP1-400: CNLK54B for all circuit sizes	A	S320 pp. 2-3; oem_spec
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S165 pp.11-8, 11-9; inference
Current rating	all 400A (30, 54, 66) and 250A 54/66 ckt	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 CU neutral lug kit 54B: 4 long CU strips (25 pos), CU riser extension and hardware; 1/0 max, CU cable only	A	same as above
	4 RP1-250 copper neutral riser extensions; #10-24 x 9/16 HWH thread-forming (8 / 10); 8 #10-24 x 1-1/8 socket cap thread-forming; 1/4-20 x 1/2 HWH thread-forming; 1/4-20 x 1 carriage bolt; anti-turn plate; 1/4-20 Belleville washer nut; 600 kcmil copper lug assembly (RP1-400); RP1 service ground electrode assembly; 250A copper lug assembly (RP1-250); copper neutral strip lugs long and short	A	S320 pp. 2-3; oem_spec
Material	copper neutral strips	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	Copper	A	S320 pp. 2-3; oem_spec
Torque values	#10-24: 30 (Al 3/16, 1/4), 25 (Cu 1/8), 50 (Cu 3/16) lb-in; 1/4-20 x 1/2: 30/50/50/72; Belleville nut 72; 5/16-18 thread-forming 108 (Al) / 72 (Cu) lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1033-01 Rev. 00: CNLK42B or CNLK54B Copper Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Identification features	For 3VA41/xGB RP1-250 panels, aluminum neutral riser extensions are replaced by the copper ones in the kit; BL/BQD/older xGB RP1-250 and all RP1-400 mount strips directly on riser	A	S320 pp. 2-3; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00317	**LNLK30A**	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1 2/0 neutral lug (strip) kit, 30-circuit

OEM part number	LNLK30A	A	S257 pp. 2-3; oem_spec
Description	Optional neutral kit replacing neutral connector strips with 2/0 mechanical connector strips in Revised P1 (P1-250 and P1-400); 18/30/42/54/66 circuits (LNLK30A for 18, LNLK54A for 66).	A	same as above
Kit contents	2/0 neutral connector strips qty 2 (18/30/42 ckt) or 4 (54/66); #10-24 x 1-1/8 socket head cap thread-forming screws; 1/4-20 x 1-1/8 hex washer head screws (P1-400 upper hole); 1/4-20 x 1 hex washer head screws (P1-250 upper hole)	A	same as above
Fasteners	Lower hole #10-24 x 1-1/8 (both P1-250 and P1-400); upper hole 1/4-20 x 1 (P1-250) or 1/4-20 x 1-1/8 (P1-400)	A	same as above
Torque values	Per Hardware Tightening Torque label (RP1 label: 2/0 neutral strips to risers 1/4-20 = 50 lb-in Cu bus / 30 lb-in Al bus)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1103-01 Rev. 00: P1 Panelboard Kit LNLK30A, LNLK42A & LNLK54A 2/0 Neutral Lug Kits Installation Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00318	LNLK42A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1 2/0 neutral lug (strip) kit, 42-circuit

OEM part number	LNLK42A	A	S257 pp. 2-3; oem_spec
Description	Optional neutral kit replacing neutral connector strips with 2/0 mechanical connector strips in Revised P1 (P1-250 and P1-400); 18/30/42/54/66 circuits (LNLK30A for 18, LNLK54A for 66).	A	same as above
Kit contents	2/0 neutral connector strips qty 2 (18/30/42 ckt) or 4 (54/66); #10-24 x 1-1/8 socket head cap thread-forming screws; 1/4-20 x 1-1/8 hex washer head screws (P1-400 upper hole); 1/4-20 x 1 hex washer head screws (P1-250 upper hole)	A	same as above
Fasteners	Lower hole #10-24 x 1-1/8 (both P1-250 and P1-400); upper hole 1/4-20 x 1 (P1-250) or 1/4-20 x 1-1/8 (P1-400)	A	same as above
Torque values	Per Hardware Tightening Torque label (RP1 label: 2/0 neutral strips to risers 1/4-20 = 50 lb-in Cu bus / 30 lb-in Al bus)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1103-01 Rev. 00: P1 Panelboard Kit LNLK30A, LNLK42A & LNLK54A 2/0 Neutral Lug Kits Installation Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00035	LNLK4X11B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long

OEM part number	LNLK4X11B	A	S165, S318 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S165, S171 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long; 2 strips per pack	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	2/0 mechanical neutral strip lugs replacing existing strips in Revised P1 or P3 (kit restricted by longest size that fits the neutral riser extensions); 1-ph 3-w / 3-ph 4-w	A	S318 pp. 2-3; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Installation location	RP1-250 with neutral riser extensions: strips mount on extensions; RP1-250 without extensions and RP1-400: directly on neutral riser; P3 per Fig. 3	A	S318 pp. 2-3; oem_spec
	Split neutral strips on both sides of the interior, cross-bussed	B	S165 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long; 2 strips per pack	A	same as above
	2 2/0 neutral strip lugs; RP1 bag: 2 #10-24 x 1-1/8 socket cap thread-forming (both RP1-250/400), 2 1/4-20 x 1 hex washer head (RP1-250), 2 1/4-20 x 1-1/8 (RP1-400); P3 bag: 2 #10-24 x 1-3/8 socket cap thread-forming, 2 1/4-20 x 1-3/8 hex washer head thread-forming	A	S318 pp. 2-3; oem_spec
Dimensions	strip length 6.17 in	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Torque values	#10-24 x 1-1/8: 30 (3/16 Al), 30 (1/4 Al), 25 (1/8 Cu), 50 (3/16 Cu) lb-in; 1/4-20 x 1 (RP1-250): 30 Al 3/16, 50 Cu 1/8; 1/4-20 x 1-1/8 (RP1-400): 50 Al 1/4, 72 Cu 3/16; P3 #10-24 x 1-3/8: 30 Al 1/4 / 50 Cu 1/4; P3 1/4-20 x 1-3/8: 50 Al 1/4 / 72 Cu 1/4 (lb-in by bus material and thickness)	A	S318 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1032-01 Rev. 00: LNLK4X11B, LNLK6X17B or LNLK7X20B 2/0 Neutral Lug Kit Instructions for P1 or P3 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec

Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00319	LNLK54A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1 2/0 neutral lug (strip) kit, 54-circuit

OEM part number	LNLK54A	A	S257 pp. 2-3; oem_spec
Description	Optional neutral kit replacing neutral connector strips with 2/0 mechanical connector strips in Revised P1 (P1-250 and P1-400); 18/30/42/54/66 circuits (LNLK30A for 18, LNLK54A for 66).	A	same as above
Kit contents	2/0 neutral connector strips qty 2 (18/30/42 ckt) or 4 (54/66); #10-24 x 1-1/8 socket head cap thread-forming screws; 1/4-20 x 1-1/8 hex washer head screws (P1-400 upper hole); 1/4-20 x 1 hex washer head screws (P1-250 upper hole)	A	same as above
Fasteners	Lower hole #10-24 x 1-1/8 (both P1-250 and P1-400); upper hole 1/4-20 x 1 (P1-250) or 1/4-20 x 1-1/8 (P1-400)	A	same as above
Torque values	Per Hardware Tightening Torque label (RP1 label: 2/0 neutral strips to risers 1/4-20 = 50 lb-in Cu bus / 30 lb-in Al bus)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1103-01 Rev. 00: P1 Panelboard Kit LNLK30A, LNLK42A & LNLK54A 2/0 Neutral Lug Kits Installation Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00033	LNLK5X12A	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]

OEM part number	LNLK5X12A	A	S165, S319 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]; short 1/0 replacement neutral strip (17 pos), 5.80in long; 2 strips per pack	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S165 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]; short 1/0 replacement neutral strip (17 pos), 5.80in long; 2 strips per pack	A	same as above
	2 1/0 neutral strip lugs; 4 #10-24 x 1-1/8 socket cap thread-forming screws	A	S319 pp. 2-3; oem_spec
Dimensions	strip length 5.80 in	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Torque values	#10-24 x 1-1/8: 30 lb-in (3/16 or 1/4 in Al bus), 25 (1/8 in Cu), 50 (3/16 in Cu)	A	S319 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1036-01 Rev. 00: LNLK5X12A or LNLK7X18A 1/0 Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00036	LNLK6X17B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long

OEM part number	LNLK6X17B	A	S165, S318 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec

Alternate / superseded numbers	LNLK42A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S165, S171 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long; 2 strips per pack	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	2/0 mechanical neutral strip lugs replacing existing strips in Revised P1 or P3 (kit restricted by longest size that fits the neutral riser extensions); 1-ph 3-w / 3-ph 4-w	A	S318 pp. 2-3; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Installation location	RP1-250 with neutral riser extensions: strips mount on extensions; RP1-250 without extensions and RP1-400: directly on neutral riser; P3 per Fig. 3	A	S318 pp. 2-3; oem_spec
	Split neutral strips on both sides of the interior, cross-bussed	B	S165 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long; 2 strips per pack	A	same as above
	2 2/0 neutral strip lugs; RP1 bag: 2 #10-24 x 1-1/8 socket cap thread-forming (both RP1-250/400), 2 1/4-20 x 1 hex washer head (RP1-250), 2 1/4-20 x 1-1/8 (RP1-400); P3 bag: 2 #10-24 x 1-3/8 socket cap thread-forming, 2 1/4-20 x 1-3/8 hex washer head thread-forming	A	S318 pp. 2-3; oem_spec
Dimensions	strip length 8.67 in	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Torque values	#10-24 x 1-1/8: 30 (3/16 Al), 30 (1/4 Al), 25 (1/8 Cu), 50 (3/16 Cu) lb-in; 1/4-20 x 1 (RP1-250): 30 Al 3/16, 50 Cu 1/8; 1/4-20 x 1-1/8 (RP1-400): 50 Al 1/4, 72 Cu 3/16; P3 #10-24 x 1-3/8: 30 Al 1/4 / 50 Cu 1/4; P3 1/4-20 x 1-3/8: 50 Al 1/4 / 72 Cu 1/4 (lb-in by bus material and thickness)	A	S318 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1032-01 Rev. 00: LNLK4X11B, LNLK6X17B or LNLK7X20B 2/0 Neutral Lug Kit Instructions for P1 or P3 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00034	LNLK7X18A	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]

OEM part number	LNLK7X18A	A	S165, S319 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]; long 1/0 replacement neutral strip (25 pos), 8.14in long; 2 strips per pack	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S165 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]; long 1/0 replacement neutral strip (25 pos), 8.14in long; 2 strips per pack	A	same as above
	2 1/0 neutral strip lugs; 4 #10-24 x 1-1/8 socket cap thread-forming screws	A	S319 pp. 2-3; oem_spec
Dimensions	strip length 8.14 in	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Torque values	#10-24 x 1-1/8: 30 lb-in (3/16 or 1/4 in Al bus), 25 (1/8 in Cu), 50 (3/16 in Cu)	A	S319 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1036-01 Rev. 00: LNLK5X12A or LNLK7X18A 1/0 Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00037	LNLK7X20B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long

OEM part number	LNLK7X20B	A	S165, S318 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S165, S171 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long; 2 strips per pack	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	2/0 mechanical neutral strip lugs replacing existing strips in Revised P1 or P3 (kit restricted by longest size that fits the neutral riser extensions); 1-ph 3-w / 3-ph 4-w	A	S318 pp. 2-3; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Installation location	RP1-250 with neutral riser extensions: strips mount on extensions; RP1-250 without extensions and RP1-400: directly on neutral riser; P3 per Fig. 3	A	S318 pp. 2-3; oem_spec
	Split neutral strips on both sides of the interior, cross-bussed	B	S165 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec

Kit contents	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long; 2 strips per pack	**A**	same as above
	2 2/0 neutral strip lugs; RP1 bag: 2 #10-24 x 1-1/8 socket cap thread-forming (both RP1-250/400), 2 1/4-20 x 1 hex washer head (RP1-250), 2 1/4-20 x 1-1/8 (RP1-400); P3 bag: 2 #10-24 x 1-3/8 socket cap thread-forming, 2 1/4-20 x 1-3/8 hex washer head thread-forming	**A**	S318 pp. 2-3; oem_spec
Dimensions	strip length 9.92 in	**A**	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Torque values	#10-24 x 1-1/8: 30 (3/16 Al), 30 (1/4 Al), 25 (1/8 Cu), 50 (3/16 Cu) lb-in; 1/4-20 x 1 (RP1-250): 30 Al 3/16, 50 Cu 1/8; 1/4-20 x 1-1/8 (RP1-400): 50 Al 1/4, 72 Cu 3/16; P3 #10-24 x 1-3/8: 30 Al 1/4 / 50 Cu 1/4; P3 1/4-20 x 1-3/8: 50 Al 1/4 / 72 Cu 1/4 (lb-in by bus material and thickness)	**A**	S318 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1032-01 Rev. 00: LNLK4X11B, LNLK6X17B or LNLK7X20B 2/0 Neutral Lug Kit Instructions for P1 or P3 Panelboards (Revised P1 only)	**A**	same as above
Status	current (2021); Revised P1 only	**A**	S165 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00099	**ECGK**	Copper equipment ground bus kit	—	current (2021)
EDH-SIE-00098	**EGK**	Al/Cu equipment ground bus kit	—	current (2021)
EDH-SIE-00101	**ICGK**	Insulated copper ground bus kit	—	current (2021)
EDH-SIE-00100	**IGK**	Insulated Al/Cu ground bus kit	—	current (2021)

EDH-SIE-00099 **ECGK** Siemens ground-bar **CURRENT (2021)**

Copper equipment ground bus kit

OEM part number	ECGK	**A**	S165, S361, S254 pp.11-20, 11-22; oem_spec
Description	Copper equipment ground bus kit: (6) #14-1/0 and (15) #14-6 connections (21 holes); CU cable only	**A**	S165 pp.11-20, 11-22; oem_spec
	Cu ground bus, 44 connections	**A**	S254 p. 11-48 (revised 05/15/18); oem_spec
Installation location	Left or right gutter; mounting provisions in opposing corners of box	**A**	S165 pp.11-8, 11-22; oem_spec
	Left or right gutter	**A**	S361 single sheet; oem_spec
Wire range	21 holes: (6) #14-1/0 large and (15) #14-6 small; small hole 1-2 x #14-12, 1 x #10, 1 x #8-#6; large hole 1-3 x #14-#10, 1 x #8, 1 x #6-#4, 1 x #3-1/0 (multiple wires only as equipment ground)	**A**	same as above
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	**A**	S165 p.11-22; oem_spec
	45 lb-in for three No. 10 AWG solid copper in large holes; other combinations per panelboard torque label	**A**	S361 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet : Lighting Panel Ground Bus Information: P1-P2-P3 (EGK / ECGK / IGK / ICGK)	**A**	same as above
Status	current (2021)	**A**	S165 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Confirm 'C' in ECGK/ICGK denotes copper (not stated in sheet)*		

EDH-SIE-00098	EGK	Siemens	ground-bar	CURRENT (2021)

Al/Cu equipment ground bus kit

OEM part number	EGK	A	S165, S361, S254 pp.11-20, 11-22; oem_spec
Description	Al/Cu equipment ground bus kit: (6) #14-1/0 and (15) #14-6 connections (21 holes)	A	S165 pp.11-20, 11-22; oem_spec
	Al ground bus, 44 connections	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S165 pp.11-8, 11-22; oem_spec
	Left or right gutter	A	S361 single sheet; oem_spec
Wire range	21 holes: (6) #14-1/0 large and (15) #14-6 small; small hole 1-2 x #14-12, 1 x #10, 1 x #8-#6; large hole 1-3 x #14-#10, 1 x #8, 1 x #6-#4, 1 x #3-1/0 (multiple wires only as equipment ground)	A	same as above
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S165 p.11-22; oem_spec
	45 lb-in for three No. 10 AWG solid copper in large holes; other combinations per panelboard torque label	A	S361 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet : Lighting Panel Ground Bus Information: P1-P2-P3 (EGK / ECGK / IGK / ICGK)	A	same as above
Status	current (2021)	A	S165 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Confirm 'C' in ECGK/ICGK denotes copper (not stated in sheet)*		

EDH-SIE-00101	ICGK	Siemens	ground-bar	CURRENT (2021)

Insulated copper ground bus kit

OEM part number	ICGK	A	S165, S361, S254 pp.11-20, 11-22; oem_spec
Description	Insulated copper ground bus kit (bar on Glastic insulator), 21 holes	A	S165 pp.11-20, 11-22; oem_spec
	Insulated Cu ground bus	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S165 pp.11-8, 11-22; oem_spec
	Left or right gutter; IGK/ICGK bar attached to Glastic insulator with 2 screws before mounting	A	S361 single sheet; oem_spec
Wire range	21 holes: (6) #14-1/0 large and (15) #14-6 small; small hole 1-2 x #14-12, 1 x #10, 1 x #8-#6; large hole 1-3 x #14-#10, 1 x #8, 1 x #6-#4, 1 x #3-1/0 (multiple wires only as equipment ground)	A	same as above
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S165 p.11-22; oem_spec
	45 lb-in for three No. 10 AWG solid copper in large holes; other combinations per panelboard torque label	A	S361 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet : Lighting Panel Ground Bus Information: P1-P2-P3 (EGK / ECGK / IGK / ICGK)	A	same as above
Status	current (2021)	A	S165 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Confirm 'C' in ECGK/ICGK denotes copper (not stated in sheet)*		

EDH-SIE-00100	IGK	Siemens	ground-bar	CURRENT (2021)

Insulated Al/Cu ground bus kit

OEM part number	IGK	A	S165, S361, S254 pp.11-20, 11-22; oem_spec
Description	Insulated Al/Cu ground bus kit (bar on Glastic insulator), 21 holes	A	S165 pp.11-20, 11-22; oem_spec
	Insulated Al ground bus	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S165 pp.11-8, 11-22; oem_spec
	Left or right gutter; IGK/ICGK bar attached to Glastic insulator with 2 screws before mounting	A	S361 single sheet; oem_spec
Wire range	21 holes: (6) #14-1/0 large and (15) #14-6 small; small hole 1-2 x #14-12, 1 x #10, 1 x #8-#6; large hole 1-3 x #14-#10, 1 x #8, 1 x #6-#4, 1 x #3-1/0 (multiple wires only as equipment ground)	A	same as above
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S165 p.11-22; oem_spec
	45 lb-in for three No. 10 AWG solid copper in large holes; other combinations per panelboard torque label	A	S361 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet : Lighting Panel Ground Bus Information: P1-P2-P3 (EGK / ECGK / IGK / ICGK)	A	same as above
Status	current (2021)	A	S165 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Confirm 'C' in ECGK/ICGK denotes copper (not stated in sheet)*		

Interior

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00338	**K-11-D-2550-01**	Revised P1 250A OEM chassis, 18 circuit, Cu 1-ph bus	—	unknown
EDH-SIE-00339	**K-11-D-2550-02**	Revised P1 250A OEM chassis, 30 circuit, Cu 1-ph bus	—	unknown
EDH-SIE-00340	**K-11-D-2550-03**	Revised P1 250A OEM chassis, 42 circuit, Cu 1-ph bus	—	unknown
EDH-SIE-00341	**K-11-D-2550-04**	Revised P1 250A OEM chassis, 54 circuit, Cu 1-ph bus	—	unknown
EDH-SIE-00342	**K-11-D-2550-05**	Revised P1 250A OEM chassis, 66 circuit, Cu 1-ph bus	—	unknown
EDH-SIE-00328	**K-11-D-2551-01**	Revised P1 250A OEM chassis, 18 circuit, Al 1-ph bus	—	unknown
EDH-SIE-00329	**K-11-D-2551-02**	Revised P1 250A OEM chassis, 30 circuit, Al 1-ph bus	—	unknown
EDH-SIE-00330	**K-11-D-2551-03**	Revised P1 250A OEM chassis, 42 circuit, Al 1-ph bus	—	unknown
EDH-SIE-00331	**K-11-D-2551-04**	Revised P1 250A OEM chassis, 54 circuit, Al 1-ph bus	—	unknown
EDH-SIE-00332	**K-11-D-2551-05**	Revised P1 250A OEM chassis, 66 circuit, Al 1-ph bus	—	unknown
EDH-SIE-00343	**K-11-D-2552-01**	Revised P1 250A OEM chassis, 18 circuit, Cu 3-ph bus	—	unknown
EDH-SIE-00344	**K-11-D-2552-02**	Revised P1 250A OEM chassis, 30 circuit, Cu 3-ph bus	—	unknown
EDH-SIE-00345	**K-11-D-2552-03**	Revised P1 250A OEM chassis, 42 circuit, Cu 3-ph bus	—	unknown
EDH-SIE-00346	**K-11-D-2552-04**	Revised P1 250A OEM chassis, 54 circuit, Cu 3-ph bus	—	unknown
EDH-SIE-00347	**K-11-D-2552-05**	Revised P1 250A OEM chassis, 66 circuit, Cu 3-ph bus	—	unknown
EDH-SIE-00333	**K-11-D-2553-01**	Revised P1 250A OEM chassis, 18 circuit, Al 3-ph bus	—	unknown
EDH-SIE-00334	**K-11-D-2553-02**	Revised P1 250A OEM chassis, 30 circuit, Al 3-ph bus	—	unknown
EDH-SIE-00335	**K-11-D-2553-03**	Revised P1 250A OEM chassis, 42 circuit, Al 3-ph bus	—	unknown
EDH-SIE-00336	**K-11-D-2553-04**	Revised P1 250A OEM chassis, 54 circuit, Al 3-ph bus	—	unknown
EDH-SIE-00337	**K-11-D-2553-05**	Revised P1 250A OEM chassis, 66 circuit, Al 3-ph bus	—	unknown
EDH-SIE-00453	**K-11-D-2554-01**	Revised P1 400A OEM chassis, 30 circuit, 1-ph, CU bus	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00455	**K-11-D-2554-02**	Revised P1 400A OEM chassis, 42 circuit, 1-ph, CU bus	—	unknown
EDH-SIE-00457	**K-11-D-2554-03**	Revised P1 400A OEM chassis, 54 circuit, 1-ph, CU bus	—	unknown
EDH-SIE-00459	**K-11-D-2554-04**	Revised P1 400A OEM chassis, 66 circuit, 1-ph, CU bus	—	unknown
EDH-SIE-00445	**K-11-D-2555-01**	Revised P1 400A OEM chassis, 30 circuit, 1-ph, AL bus	—	unknown
EDH-SIE-00447	**K-11-D-2555-02**	Revised P1 400A OEM chassis, 42 circuit, 1-ph, AL bus	—	unknown
EDH-SIE-00449	**K-11-D-2555-03**	Revised P1 400A OEM chassis, 54 circuit, 1-ph, AL bus	—	unknown
EDH-SIE-00451	**K-11-D-2555-04**	Revised P1 400A OEM chassis, 66 circuit, 1-ph, AL bus	—	unknown
EDH-SIE-00454	**K-11-D-2556-01**	Revised P1 400A OEM chassis, 30 circuit, 3-ph, CU bus	—	unknown
EDH-SIE-00456	**K-11-D-2556-02**	Revised P1 400A OEM chassis, 42 circuit, 3-ph, CU bus	—	unknown
EDH-SIE-00458	**K-11-D-2556-03**	Revised P1 400A OEM chassis, 54 circuit, 3-ph, CU bus	—	unknown
EDH-SIE-00460	**K-11-D-2556-04**	Revised P1 400A OEM chassis, 66 circuit, 3-ph, CU bus	—	unknown
EDH-SIE-00446	**K-11-D-2557-01**	Revised P1 400A OEM chassis, 30 circuit, 3-ph, AL bus	—	unknown
EDH-SIE-00448	**K-11-D-2557-02**	Revised P1 400A OEM chassis, 42 circuit, 3-ph, AL bus	—	unknown
EDH-SIE-00450	**K-11-D-2557-03**	Revised P1 400A OEM chassis, 54 circuit, 3-ph, AL bus	—	unknown
EDH-SIE-00452	**K-11-D-2557-04**	Revised P1 400A OEM chassis, 66 circuit, 3-ph, AL bus	—	unknown

EDH-SIE-00338 **K-11-D-2550-01** Siemens lineage interior **STATUS UNKNOWN**

Revised P1 250A OEM chassis, 18 circuit, Cu 1-ph bus

OEM part number	K-11-D-2550-01	**A**	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 18 circuit Cu 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	**A**	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	**A**	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	**A**	same as above
Dimensions	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	**A**	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	**A**	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00339	K-11-D-2550-02	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 30 circuit, Cu 1-ph bus

OEM part number	K-11-D-2550-02	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 30 circuit Cu 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00340	K-11-D-2550-03	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 42 circuit, Cu 1-ph bus

OEM part number	K-11-D-2550-03	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 42 circuit Cu 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00341	K-11-D-2550-04	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 54 circuit, Cu 1-ph bus

OEM part number	K-11-D-2550-04	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 54 circuit Cu 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00342	K-11-D-2550-05	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 66 circuit, Cu 1-ph bus

OEM part number	K-11-D-2550-05	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 66 circuit Cu 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00328	K-11-D-2551-01	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 18 circuit, Al 1-ph bus

OEM part number	K-11-D-2551-01	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 18 circuit Al 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00329	K-11-D-2551-02	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 30 circuit, Al 1-ph bus

OEM part number	K-11-D-2551-02	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 30 circuit Al 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00330	K-11-D-2551-03	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 42 circuit, Al 1-ph bus

OEM part number	K-11-D-2551-03	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 42 circuit Al 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00331	K-11-D-2551-04	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 54 circuit, Al 1-ph bus

OEM part number	K-11-D-2551-04	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 54 circuit Al 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00332	K-11-D-2551-05	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 66 circuit, Al 1-ph bus

OEM part number	K-11-D-2551-05	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 66 circuit Al 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00343	K-11-D-2552-01	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 18 circuit, Cu 3-ph bus

OEM part number	K-11-D-2552-01	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 18 circuit Cu 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00344	K-11-D-2552-02	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 30 circuit, Cu 3-ph bus

OEM part number	K-11-D-2552-02	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 30 circuit Cu 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00345	K-11-D-2552-03	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 42 circuit, Cu 3-ph bus

OEM part number	K-11-D-2552-03	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 42 circuit Cu 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00346	K-11-D-2552-04	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 54 circuit, Cu 3-ph bus

OEM part number	K-11-D-2552-04	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 54 circuit Cu 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00347	K-11-D-2552-05	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 66 circuit, Cu 3-ph bus

OEM part number	K-11-D-2552-05	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 66 circuit Cu 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00333	K-11-D-2553-01	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 18 circuit, Al 3-ph bus

OEM part number	K-11-D-2553-01	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 18 circuit Al 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00334	K-11-D-2553-02	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 30 circuit, Al 3-ph bus

OEM part number	K-11-D-2553-02	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 30 circuit Al 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00335	K-11-D-2553-03	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 42 circuit, Al 3-ph bus

OEM part number	K-11-D-2553-03	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 42 circuit Al 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00336	K-11-D-2553-04	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 54 circuit, Al 3-ph bus

OEM part number	K-11-D-2553-04	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 54 circuit Al 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00337	K-11-D-2553-05	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 66 circuit, Al 3-ph bus

OEM part number	K-11-D-2553-05	A	S269 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 66 circuit Al 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S269 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00453	K-11-D-2554-01	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 30 circuit, 1-ph, CU bus

OEM part number	K-11-D-2554-01	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 30 circuit, 1-ph, copper bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 15"; dimension A = 8"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00455	K-11-D-2554-02	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 42 circuit, 1-ph, CU bus

OEM part number	K-11-D-2554-02	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 42 circuit, 1-ph, copper bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 21"; dimension A = 11"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00457	K-11-D-2554-03	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 54 circuit, 1-ph, CU bus

OEM part number	K-11-D-2554-03	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 54 circuit, 1-ph, copper bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 27"; dimension A = 14"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00459	K-11-D-2554-04	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 66 circuit, 1-ph, CU bus

OEM part number	K-11-D-2554-04	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 66 circuit, 1-ph, copper bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 33"; dimension A = 17"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00445	K-11-D-2555-01	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 30 circuit, 1-ph, AL bus

OEM part number	K-11-D-2555-01	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 30 circuit, 1-ph, aluminum bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 15"; dimension A = 8"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00447	K-11-D-2555-02	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 42 circuit, 1-ph, AL bus

OEM part number	K-11-D-2555-02	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 42 circuit, 1-ph, aluminum bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 21"; dimension A = 11"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00449	K-11-D-2555-03	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 54 circuit, 1-ph, AL bus

OEM part number	K-11-D-2555-03	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 54 circuit, 1-ph, aluminum bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 27"; dimension A = 14"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00451	K-11-D-2555-04	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 66 circuit, 1-ph, AL bus

OEM part number	K-11-D-2555-04	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 66 circuit, 1-ph, aluminum bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 33"; dimension A = 17"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00454	K-11-D-2556-01	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 30 circuit, 3-ph, CU bus

OEM part number	K-11-D-2556-01	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 30 circuit, 3-ph, copper bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 15"; dimension A = 8"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00456	K-11-D-2556-02	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 42 circuit, 3-ph, CU bus

OEM part number	K-11-D-2556-02	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 42 circuit, 3-ph, copper bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 21"; dimension A = 11"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00458	K-11-D-2556-03	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 54 circuit, 3-ph, CU bus

OEM part number	K-11-D-2556-03	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 54 circuit, 3-ph, copper bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 27"; dimension A = 14"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00460	K-11-D-2556-04	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 66 circuit, 3-ph, CU bus

OEM part number	K-11-D-2556-04	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 66 circuit, 3-ph, copper bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 33"; dimension A = 17"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00446	K-11-D-2557-01	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 30 circuit, 3-ph, AL bus

OEM part number	K-11-D-2557-01	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 30 circuit, 3-ph, aluminum bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 15"; dimension A = 8"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00448	K-11-D-2557-02	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 42 circuit, 3-ph, AL bus

OEM part number	K-11-D-2557-02	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 42 circuit, 3-ph, aluminum bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 21"; dimension A = 11"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00450	K-11-D-2557-03	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 54 circuit, 3-ph, AL bus

OEM part number	K-11-D-2557-03	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 54 circuit, 3-ph, aluminum bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 27"; dimension A = 14"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00452	K-11-D-2557-04	Siemens	interior	STATUS UNKNOWN

Revised P1 400A OEM chassis, 66 circuit, 3-ph, AL bus

OEM part number	K-11-D-2557-04	A	S468 pp.2-3; oem_spec
Description	Revised P1 400 A OEM chassis (interior without deadfront/neutral), 66 circuit, 3-ph, aluminum bus; neutrals NOT provided	A	same as above
Application	OEM chassis for building Revised P1 panelboards; short-circuit rating 200 kA max or lowest device (22 kA if subfeed/feed-thru lugs without protective device)	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	A	same as above
Current rating	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	A	same as above
Kit contents	Intermediate support(s) shipped separately: one at 1.50in from centerline for 54/66-circuit 1-ph and 42-circuit 3-ph; two at 4.50in for 54/66-circuit 3-ph	A	same as above
Dimensions	Bus length L = 33"; dimension A = 17"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in	A	same as above
Replacement / successor	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Material, Status, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00092	**P1DFS250AFT**	P1 250A deadfront support	—	listed (2021)
EDH-SIE-00093	**P1DFS250ANFT**	P1 250A deadfront support	—	listed (2021)
EDH-SIE-00094	**P1DFS400A**	P1 400A deadfront support (new for 3VA)	—	listed (2021)

EDH-SIE-00092	P1DFS250AFT	Siemens	mounting-bracket	LISTED (2021)

P1 250A deadfront support

OEM part number	P1DFS250AFT	A	S165, S357 p.11-20; oem_spec
Description	P1 250A deadfront support, feed-thru interiors only (4 per interior); part 11-D-3323-01 replaces 11-D-3212-01	A	S165 p.11-20; oem_spec
Kit contents	qty/kit 1	A	same as above
	4 RP1-250 deadfront supports and 8 mounting screws (#10-24 hex washer head)	A	S357 single sheet; oem_spec
Material	8 gage steel (approx 0.17 in) per 11-B-1059-01	A	same as above
Torque values	Deadfront-to-support screws 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1196-01 Rev. 00: P1DFS250AFT or P1DFS250ANFT RP1-250 Panelboard Deadfront Supports	A	same as above
Status	listed (2021)	A	S165 p.11-20; oem_spec
Identification features	Drawing ref 11-D-3323	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00093	P1DFS250ANFT	Siemens	mounting-bracket	LISTED (2021)

P1 250A deadfront support

OEM part number	P1DFS250ANFT	A	S165, S357 p.11-20; oem_spec
Description	P1 250A deadfront support, non-feed-thru interiors only (4 per interior); part 11-D-3323-02 replaces 11-D-3212-02	A	S165 p.11-20; oem_spec
Kit contents	qty/kit 1	A	same as above
	4 RP1-250 deadfront supports and 8 mounting screws (#10-24 hex washer head)	A	S357 single sheet; oem_spec
Material	8 gage steel (approx 0.17 in) per 11-B-1059-01	A	same as above
Torque values	Deadfront-to-support screws 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1196-01 Rev. 00: P1DFS250AFT or P1DFS250ANFT RP1-250 Panelboard Deadfront Supports	A	same as above
Status	listed (2021)	A	S165 p.11-20; oem_spec
Identification features	Drawing ref 11-D-3323	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00094	P1DFS400A	Siemens	mounting-bracket	LISTED (2021)

P1 400A deadfront support (new for 3VA)

OEM part number	P1DFS400A	A	S165, S358 p.11-20; oem_spec
Description	P1 400A deadfront support (new for 3VA), FT and NFT interiors; 11-D-3315-01 replaces 11-D-3004-01 (4 per interior)	A	S165 p.11-20; oem_spec
Kit contents	qty/kit 1	A	same as above
	4 RP1-400 deadfront support brackets and 8 mounting screws (#10-24 hex washer head)	A	S358 single sheet; oem_spec
Material	8 gage steel (approx 0.17 in) per 11-B-1059-01	A	same as above
Torque values	30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1190-01 Rev. 00: P1DFS400A RP1-400 Panel Deadfront Supports	A	same as above
Status	listed (2021)	A	S165 p.11-20; oem_spec
Identification features	Drawing ref 11-D-3315	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00231	**SEBKP1P2P3V1**	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main	Vertically mounted JD in Revised P1; JD, LD, CJD or CLD in P2 (with/wi A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00224	**SEBKRP1V1**	SEB kit for RP1 with FD, QJ or QR horizontal main	FD, QJ or QR main breaker **A**	unknown
EDH-SIE-00225	**SEBKRP1V2**	SEB kit for RP1 with ED horizontal main	ED main breaker **A**	unknown
EDH-SIE-00226	**SEBKRP1V3**	SEB kit for RP1 with back-fed BL/BQD main in unit space	Back-fed BL or BQD main (any of four corners) **A**	unknown
EDH-SIE-00227	**SEBKRP1V4**	SEB kit for RP1 with back-fed xGB main in unit space	Back-fed xGB main (top left top-fed / bottom right bottom-fed only) **A**	unknown
EDH-SIE-00228	**SEBKRP1V5**	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets	BL, BQD or GB main outside unit space (flap between shunt trip and bre **A**	unknown
EDH-SIE-00229	**SEBKRP1V6**	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit	BL, BQD, xGB or 3VA41 main outside unit space (remove perforated tab o **A**	unknown
EDH-SIE-00230	**SEBKRP1V7**	SEB kit for RP1 with 3VA52/61/62 horizontal main	Horizontally-mounted 3VA52/61/62 main (tear tab off if communications **A**	unknown

EDH-SIE-00231 — SEBKP1P2P3V1 — Siemens — barrier — STATUS UNKNOWN

SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main

OEM part number	SEBKP1P2P3V1	**A**	S165, S333, S254 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main; field installable per UL 67 service entrance requirement	**A**	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
	JD, LD service entrance barrier kit (RP1, P1, P2, P3)	**A**	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	**A**	S333 single sheet; oem_spec
Breaker compatibility	Vertically mounted JD in Revised P1; JD, LD, CJD or CLD in P2 (with/without SEM3) or P3	**A**	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	**A**	S165 p.11-67; oem_spec
	1 barrier assembly; 6 #8-32 x 3/8 IHWHSW (6 P3 / 4 P2); 4 #10-24 x 7/16 SHWHSW (RP1 only); 2 P3 adaptors	**A**	S333 single sheet; oem_spec
Mounting-hole pattern	Mounting hole legend: RP1 holes A&D #10-24; P2 std A&D #8-32; P2 SEM3 A&B #8-32; P3 C&E #8-32 (symmetrical both sides); offsets 1 in (JD), 1.5 in (CJD/CLD), 2 in (LD); 2.50 in (JD/CJD) or 3.00 in (LD/CLD); SEM3 P2: remove perforated ~1-7/8 x 6-1/8 in piece	**A**	same as above
Torque values	#8-32 20 lb-in; RP1 #10-24 30 lb-in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1157-01 Rev. 00: SEBKP1P2P3V1 Service Entrance Barrier Kit for Revised P1, P2 or P3	**A**	same as above
Identification features	Drawing ref 11-A-1157-01 / 11-D-2740-01	**A**	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-SIE-00224	SEBKRP1V1	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with FD, QJ or QR horizontal main

OEM part number	SEBKRP1V1	A	S165, S323 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with FD, QJ or QR horizontal main; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S323 single sheet; oem_spec
Installation location	On deadfront support nearest service terminals (upper left top-fed / lower right bottom-fed); half-shear into hole nearest 90 deg bend, screw in hole nearest 45 deg bend	A	same as above
Breaker compatibility	FD, QJ or QR main breaker	A	same as above
Kit contents	1 barrier support assembly (pre-assembled); 1 #10-24 x 7/16 SHWHSW screw	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Torque values	Barrier support to deadfront support 30 lb-in; deadfront support mounting screw 30 lb-in	A	S323 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1148-01 Rev. 00: SEBKRP1V1 / SEBKRP1V2 Service Entrance Barrier Kits for Revised P1 Panelboards	A	same as above
Identification features	Drawing ref 11-A-1148-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00225	SEBKRP1V2	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with ED horizontal main

OEM part number	SEBKRP1V2	A	S165, S323 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with ED horizontal main; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S323 single sheet; oem_spec
Breaker compatibility	ED main breaker	A	same as above
Kit contents	1 barrier support assembly; 1 #10-24 x 7/16 SHWHSW screw	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Torque values	30 lb-in	A	S323 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1148-01 Rev. 00: SEBKRP1V1 / SEBKRP1V2 Service Entrance Barrier Kits for Revised P1 Panelboards	A	same as above
Identification features	Drawing ref 11-A-1148-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00226	SEBKRP1V3	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with back-fed BL/BQD main in unit space

OEM part number	SEBKRP1V3	A	S165, S324 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with back-fed BL/BQD main in unit space; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S324 single sheet; oem_spec
Breaker compatibility	Back-fed BL or BQD main (any of four corners)	A	same as above
Kit contents	1 barrier support bracket; 1 barrier assembly; 1 large plastic ribbed shank rivet; 2 #10-24 x 7/16 SHWHSW screws	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Mounting-hole pattern	Bracket mounts to pair of base-rail holes 2 in apart at interior corner; OUTER bracket holes for BL/BQD, INNER for xGB	A	S324 single sheet; oem_spec
Torque values	Both screws 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1149-01 Rev. 00: SEBKRP1V3 / SEBKRP1V4 Service Entrance Barrier Kits for Revised P1 Panelboards	A	same as above
Identification features	Drawing ref 11-A-1149-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-SIE-00227	SEBKRP1V4	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with back-fed xGB main in unit space

OEM part number	SEBKRP1V4	A	S165, S324 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with back-fed xGB main in unit space; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S324 single sheet; oem_spec
Breaker compatibility	Back-fed xGB main (top left top-fed / bottom right bottom-fed only)	A	same as above
Kit contents	1 barrier support bracket; 1 barrier assembly; 1 large plastic rivet; 2 #10-24 x 7/16 SHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Mounting-hole pattern	Inner pair of bracket holes aligned to base-rail holes 2 in apart	A	S324 single sheet; oem_spec
Torque values	30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1149-01 Rev. 00: SEBKRP1V3 / SEBKRP1V4 Service Entrance Barrier Kits for Revised P1 Panelboards	A	same as above
Identification features	Drawing ref 11-A-1149-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-SIE-00228	SEBKRP1V5	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets

OEM part number	SEBKRP1V5	A	S165, S325 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S325 single sheet; oem_spec
Breaker compatibility	BL, BQD or GB main outside unit space (flap between shunt trip and breaker if fitted)	A	same as above
Kit contents	1 barrier support assembly; 1 #10-24 x 7/16 SHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Torque values	30 lb-in	A	S325 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1165-01 Rev. 00: SEBKRP1V5 Service Entrance Barrier Kit for Revised P1 Panelboards	A	same as above
Identification features	Drawing ref 11-A-1165-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00229	SEBKRP1V6	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit

OEM part number	SEBKRP1V6	A	S165, S326 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S326 single sheet; oem_spec
Breaker compatibility	BL, BQD, xGB or 3VA41 main outside unit space (remove perforated tab on accessory side for xGB/BQD with accessory)	A	same as above
Kit contents	1 barrier support assembly; 1 #10-24 x 7/16 SHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Torque values	30 lb-in	A	S326 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1194-01 Rev. 00: SEBKRP1V6 Service Entrance Barrier Kit for Revised P1 Panelboard	A	same as above
Identification features	Drawing ref 11-A-1194-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00230	SEBKRP1V7	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with 3VA52/61/62 horizontal main

OEM part number	SEBKRP1V7	A	S165, S327 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with 3VA52/61/62 horizontal main; field installable per UL 67 service entrance requirement	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S327 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted 3VA52/61/62 main (tear tab off if communications T-connector at cable end)	A	same as above
Kit contents	1 service barrier assembly; 1 #10-24 IHWHSW screw	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S165 p.11-67; oem_spec
Torque values	30 lb-in	A	S327 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1060-01 Rev. 00: SEBKRP1V7 Service Entrance Barrier Kit for RP1 Panelboard	A	same as above
Identification features	Drawing ref 11-B-1060-01	A	S165 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00377	**DFFP01A**	Revised P1 deadfront main blank or subfeed filler plate	—	unknown
EDH-SIE-00064	**DFFP01B**	P1 main or subfeed 250A blank filler plate	—	listed (2021)
EDH-SIE-00065	**DFFP01C**	Revised P1 400A main blank filler plate	—	listed (2021)
EDH-SIE-00062	**DFFP1A**	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	BL/BQD/xGB/xGB2/ED/3VA41 blank positions; suitable for replacing QF3 a A	current (2021)
EDH-SIE-00069	**DFFPED01**	P1 main filler for 100-125A frames ED	—	replaced by DFFPVA41A
EDH-SIE-00070	**DFFPFD01**	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels	—	listed (2021)
EDH-SIE-00071	**DFFPJD01**	JD main filler plate (plastic)	—	listed (2021)
EDH-SIE-00072	**DFFPJD02**	JD main filler plate for Revised P1 400A with large MB opening only	—	listed (2021)
EDH-SIE-00073	**DFFPQJ01**	QJ main filler plate	—	listed (2021)
EDH-SIE-00074	**DFFPQJ02**	QJ main filler plate	—	listed (2021)
EDH-SIE-00378	**DFFPV5363A**	Revised P1 deadfront 3VA53/63 main breaker filler plate	—	unknown
EDH-SIE-00066	**DFFPVA41A**	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	—	listed (2021)
EDH-SIE-00067	**DFFPVA5262A**	RP1 main or subfeed filler	—	listed (2021)
EDH-SIE-00068	**DFFPVA5363A**	RP1 400A main filler for 3VA53/63	—	listed (2021)
EDH-SIE-00075	**MBKQRFK**	P1 / Revised P1 deadfront filler for 1PH/3PH QR main	—	listed (2021)

EDH-SIE-00377	DFFP01A	Siemens lineage	filler-plate	STATUS UNKNOWN

Revised P1 deadfront main blank or subfeed filler plate

OEM part number	DFFP01A	**A**	S342 single sheet; oem_spec
Kit contents	1 filler plate, Siemens piece no. 11-D-4560-01 / 11-D-4607-01 / 11-D-4612-01 (one of)	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	**A**	same as above
Identification features	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	**A**	same as above
Cross-links	Families: RP1		

EDH-SIE-00064	DFFP01B	Siemens	filler-plate	LISTED (2021)

P1 main or subfeed 250A blank filler plate

OEM part number	DFFP01B	**A**	S165, S342 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFP01A	**A**	S165 supersedes; p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	11-D-4560-01 [supersedes]	**A**	same as above
	12-A-1801-01 [supersedes]	**A**	same as above
Description	P1 main or subfeed 250A blank filler plate, 1 piece (Original or Revised P1; also S1/S2/SE); installs vertical for 400A main w/ small DF opening	**A**	same as above
Application	main / subfeed deadfront opening	**A**	same as above
Kit contents	1 filler plate, Siemens piece no. 11-D-4612-01 (per 11-B-1059-01; sheet lists 11-D-4560-01/4607-01/4612-01 for DFFP01A or B)	**A**	S342 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	**A**	same as above
Status	listed (2021)	**A**	S165 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4612-01	**A**	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	**A**	S342 single sheet; oem_spec
Cross-links	Families: RP1, P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00065	DFFP01C	Siemens	filler-plate	LISTED (2021)

Revised P1 400A main blank filler plate

OEM part number	DFFP01C	A	S165, S342 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	Revised P1 400A main blank filler plate, 1 piece, for large MB opening only	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
Kit contents	1 filler plate, Siemens piece no. 11-D-4600-01	A	S342 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	A	same as above
Status	listed (2021)	A	S165 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4600-01	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	A	S342 single sheet; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00062	DFFP1A	Siemens	filler-plate	CURRENT (2021)

1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)

OEM part number	DFFP1A	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFP1 (Earlier number; DFFP1 fits tighter in the opening than QF3 (stronger spring tabs))	A	S165 supersedes; pp.11-23, 11-67, 11-96; oem_spec
	12-1800-01 (old reference/drawing number)	A	S165 alias; p.11-20; oem_spec
	11-D-4554-01 [alias] (old eng. ref; current eng ref 11-D-4613-01)	A	same as above
	QF3 (QF3 is approved in all panelboards/switchboards and is the only one approved in residential products; slides out when P1-P3 deadfront removed)	A	S165 equivalent; p.11-23 footnotes a,b; oem_spec
Description	Blank filler, 1 inch snap-in; replaced old QF3 and DFFP1 in Systems products	A	S165 p.11-20; oem_spec
Application	blank 1in branch positions; also fills void where a 2-pole breaker is installed in a 3-pole position	A	S165 p.11-23 footnote a; oem_spec
Installation location	Deadfront branch openings (horizontal or vertical)	A	S165 p.11-23 row A1; oem_spec
Breaker compatibility	BL/BQD/xGB/xGB2/ED/3VA41 blank positions; suitable for replacing QF3 and DFFP1 in P1-P5 panelboards and switchboards	A	S165 p.11-23; oem_spec
Status	current (2021)	A	S165 p.11-20; oem_spec
Identification features	Eng. ref 11-D-4613-01; snap-in with small spring side tabs	A	S165 pp.11-20, 11-23; oem_spec
Cross-links	Families: RP1, P1, S1/S2, P2, P3, P4, P5, SB · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', ED (ED2/ED4/ED6/HED4/HHED6) and CED6, 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Exact outline dimensions of DFFP1A vs QF3 (distributor s13 gives QF3 12.9in x 5.2in which is likely packaging)*		

EDH-SIE-00069	DFFPED01	Siemens	filler-plate	REPLACED BY DFFPVA41A

P1 main filler for 100-125A frames ED

OEM part number	DFFPED01	**A**	S165, S469 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFPVA41A	**A**	S165 superseded_by; p.11-20; oem_spec
	12-A-1802-01 (Siemens piece number of the filler plate)	**A**	S469 alias; p.1; oem_spec
Description	P1 main filler for 100-125A frames ED, BL/BQD or xGB (replaced by DFFPVA41A)	**A**	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Replacement ED main filler plate for Siemens lighting panel deadfront	**A**	S469 p.1; oem_spec
Application	main / subfeed deadfront opening	**A**	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	accessory; if opening remains (e.g. DFFPED01 over a 2-pole breaker) add DFFP1 filler (sold separately)	**A**	S469 p.1; oem_spec
Kit contents	Qty 1 ED main filler plate, piece no. 12-A-1802-01	**A**	same as above
OEM instruction document	11-A-1181-01	**A**	same as above
Status	replaced by DFFPVA41A	**A**	S165 pp.11-13, 11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1802-61	**A**	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snaps into rectangular deadfront opening with two pairs of hooks; cut-out allows breaker penetration	**A**	S469 p.1; oem_spec
Cross-links	Families: RP1, P1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', ED (ED2/ED4/ED6/HED4/HHED6) and CED6, Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00070	DFFPFD01	Siemens	filler-plate	LISTED (2021)

FD main filler plate (plastic) for 1-ph and 3-ph P1 panels

OEM part number	DFFPFD01	**A**	S165, S469 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	12-A-1803-01 (Siemens piece number of the filler plate)	**A**	S469 alias; p.1; oem_spec
Description	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels; also P2/P3 and S1/S2/SE	**A**	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Replacement FD main filler plate for Siemens lighting panel deadfront	**A**	S469 p.1; oem_spec
Application	main / subfeed deadfront opening	**A**	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	accessory; if opening remains (e.g. DFFPED01 over a 2-pole breaker) add DFFP1 filler (sold separately)	**A**	S469 p.1; oem_spec
Kit contents	Qty 1 FD main filler plate, piece no. 12-A-1803-01	**A**	same as above
Material	plastic	**A**	S165 p.11-53; oem_spec
OEM instruction document	11-A-1181-01	**A**	S469 p.1; oem_spec
Status	listed (2021)	**A**	S165 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1803-61	**A**	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snaps into rectangular deadfront opening with two pairs of hooks; cut-out allows breaker penetration	**A**	S469 p.1; oem_spec
Cross-links	Families: RP1, P1, S1/S2, SE, P2, P3 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00071	DFFPJD01	Siemens	filler-plate	LISTED (2021)

JD main filler plate (plastic)

OEM part number	DFFPJD01	A	S165, S342 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	JD main filler plate (plastic), 1-ph and 3-ph P1, small MB opening; also P2/P3 and S1/S2	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
Kit contents	1 filler plate, Siemens piece no. 11-D-4522-01 or 11-D-4598-01	A	S342 single sheet; oem_spec
Material	plastic	A	S165 p.11-53; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	A	S342 single sheet; oem_spec
Status	listed (2021)	A	S165 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4522-61	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	A	S342 single sheet; oem_spec
Cross-links	Families: RP1, P1, S1/S2, P2, P3 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00072	DFFPJD02	Siemens	filler-plate	LISTED (2021)

JD main filler plate for Revised P1 400A with large MB opening only

OEM part number	DFFPJD02	A	S165, S342 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	JD main filler plate for Revised P1 400A with large MB opening only	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
Kit contents	1 filler plate, Siemens piece no. 11-D-4522-01 or 11-D-4598-01	A	S342 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	A	same as above
Status	listed (2021)	A	S165 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4598-01	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	A	S342 single sheet; oem_spec
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00073	DFFPQJ01	Siemens	filler-plate	LISTED (2021)

QJ main filler plate

OEM part number	DFFPQJ01	**A**	S165, S469 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	12-A-1804-01 (Siemens piece number of the filler plate)	**A**	S469 alias; p.1; oem_spec
Description	QJ main filler plate, 3-phase (3-pole) P1 panels	**A**	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Replacement 3-pole QJ main filler plate for Siemens lighting panel deadfront	**A**	S469 p.1; oem_spec
Application	main / subfeed deadfront opening	**A**	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	accessory; if opening remains (e.g. DFFPED01 over a 2-pole breaker) add DFFP1 filler (sold separately)	**A**	S469 p.1; oem_spec
Kit contents	Qty 1 3-pole QJ main filler plate, piece no. 12-A-1804-01	**A**	same as above
OEM instruction document	11-A-1181-01	**A**	same as above
Status	listed (2021)	**A**	S165 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1804-61	**A**	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snaps into rectangular deadfront opening with two pairs of hooks; cut-out allows breaker penetration	**A**	S469 p.1; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H, QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00074	DFFPQJ02	Siemens	filler-plate	LISTED (2021)

QJ main filler plate

OEM part number	DFFPQJ02	A	S165, S469 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	12-A-1804-02 (Siemens piece number of the filler plate)	A	S469 alias; p.1; oem_spec
Description	QJ main filler plate, 1-phase (2-pole) P1 panels	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Replacement 2-pole QJ main filler plate for Siemens lighting panel deadfront	A	S469 p.1; oem_spec
Application	main / subfeed deadfront opening	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	accessory; if opening remains (e.g. DFFPED01 over a 2-pole breaker) add DFFP1 filler (sold separately)	A	S469 p.1; oem_spec
Kit contents	Qty 1 2-pole QJ main filler plate, piece no. 12-A-1804-02	A	same as above
OEM instruction document	11-A-1181-01	A	same as above
Status	listed (2021)	A	S165 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1804-62	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snaps into rectangular deadfront opening with two pairs of hooks; cut-out allows breaker penetration	A	S469 p.1; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H, QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00378	DFFPV5363A	Siemens lineage	filler-plate	STATUS UNKNOWN

Revised P1 deadfront 3VA53/63 main breaker filler plate

OEM part number	DFFPV5363A	A	S342 single sheet; oem_spec
Kit contents	1 filler plate, Siemens piece no. 11-D-4599-01	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	A	same as above
Identification features	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00066	DFFPVA41A	Siemens	filler-plate	LISTED (2021)

RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max

OEM part number	DFFPVA41A	A	S165, S342 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFPED01	A	S165 supersedes; p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	12-A-1802-01 [supersedes]	A	same as above
Description	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Kit contents	1 filler plate, Siemens piece no. 11-D-4604-01	A	S342 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	A	same as above
Status	listed (2021)	A	S165 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4604-01	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	A	S342 single sheet; oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41, ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00067	DFFPVA5262A	Siemens	filler-plate	LISTED (2021)

RP1 main or subfeed filler

OEM part number	DFFPVA5262A	A	S165, S343 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	RP1 main or subfeed filler, single mount 3VA52/61/62 (150-250A)	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
Kit contents	1 3VA52/61/62 breaker filler plate, Siemens piece no. 11-D-4617-01	A	S343 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1061-01 Rev. 00: DFFPVA5262A Filler Plate Kit replacement filler plate (3VA52/61/62)	A	same as above
Status	listed (2021)	A	S165 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4617-01	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Hook end and snap end; 'ON', 'GUTTER' and 'BRANCH' markings; break-off wall section 'REMOVE FOR 3VA61 OR 3VA62 BREAKERS' (leave intact for 3VA5x)	A	S343 single sheet; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00068	DFFPVA5363A	Siemens	filler-plate	LISTED (2021)

RP1 400A main filler for 3VA53/63

OEM part number	DFFPVA5363A	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	RP1 400A main filler for 3VA53/63, large MB opening only (also used in P2/P3)	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S165 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4599-01 (p.11-23) / 11-D-4617-01 (p.11-20)	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00075	MBKQRFK	Siemens	filler-plate	LISTED (2021)

P1 / Revised P1 deadfront filler for 1PH/3PH QR main

OEM part number	MBKQRFK	A	S165, S317 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	P1 / Revised P1 deadfront filler for 1PH/3PH QR main, horizontal mount only	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
	Original P1 and/or Revised P1, 1-ph or 3-ph, main or subfeed, horizontal mount only; do NOT use if breaker mounting screw heads are covered by factory epoxy (order MBKQR1A/MBKQR3A strap kit + breaker or breaker-included kit instead)	A	S317 single sheet; oem_spec
Kit contents	QR plastic filler; MAIN label; SERVICE DISCONNECT label	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1134-01 Rev. 00: MBKQRFK P1 / RP1 Filler Kit for QR Breaker Installation Instructions	A	same as above
Status	listed (2021)	A	S165 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-2643-01 (p.11-20) / 11-D-4563-01 (p.11-23)	A	S165 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00396	**B74FLR**	74 in panelboard box (floor) accepting 26-74 in interiors	—	unknown
EDH-SIE-00240	**EWK1**	End wall kit with knockouts (20in W x 5.75in D) 20in	—	unknown
EDH-SIE-00243	**EWK1B**	End wall kit without knockouts (20in W x 5.75in D) 20in	—	unknown
EDH-SIE-00241	**EWK2**	End wall kit with knockouts (24in W x 7.75in D) 24in	—	unknown
EDH-SIE-00244	**EWK2B**	End wall kit without knockouts (24in W x 7.75in D) 24in	—	unknown
EDH-SIE-00242	**EWK3**	End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in	—	unknown

EDH-SIE-00396	B74FLR	Siemens lineage	box/enclosure	STATUS UNKNOWN

74 in panelboard box (floor) accepting 26-74 in interiors

OEM part number	B74FLR	A	S355 single sheet; oem_spec
Description	Box with upper and bottom 1/4-20 x 1 mounting studs for 74 in interior; bag of bottom mounting bolts (shorter pair for RP1, longer for P2) to mount 68/62/56/50/44/38/32/26 in interiors 6-48 in higher; open endwall can be moved to lowest position (8 screws)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1129-01 Rev. 00: B74FLR preparation for installation instructions (74 in box)	A	same as above
Cross-links	Families: RP1, P2		

EDH-SIE-00240	EWK1	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit with knockouts (20in W x 5.75in D) 20in

OEM part number	EWK1	A	S165, S352 p.11-34; oem_spec
Description	End wall kit with knockouts (20in W x 5.75in D), Type 1 only	A	S165 p.11-34; oem_spec
Kit contents	2 box end walls and mounting hardware (16 screws, half used at each end)	A	S352 single sheet; oem_spec
Dimensions	20in W x 5.75in D	A	S165 p.11-34; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1004-01 Rev. 01: EWK1 / EWK2 / EWK1B / EWK2B box end wall kits	A	S352 single sheet; oem_spec
Identification features	Notched end of end wall faces front	A	same as above
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00243	EWK1B	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit without knockouts (20in W x 5.75in D) 20in

OEM part number	EWK1B	A	S165, S352 p.11-34; oem_spec
Description	End wall kit without knockouts (20in W x 5.75in D), Type 1 only	A	S165 p.11-34; oem_spec
Kit contents	2 box end walls and mounting hardware (16 screws, half used at each end)	A	S352 single sheet; oem_spec
Dimensions	20in W x 5.75in D	A	S165 p.11-34; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1004-01 Rev. 01: EWK1 / EWK2 / EWK1B / EWK2B box end wall kits	A	S352 single sheet; oem_spec
Identification features	Notched end of end wall faces front	A	same as above
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00241	EWK2	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit with knockouts (24in W x 7.75in D) 24in

OEM part number	EWK2	A	S165, S352, S254 p.11-34; oem_spec
Description	End wall kit with knockouts (24in W x 7.75in D), Type 1 only	A	S165 p.11-34; oem_spec
	End wall kit with knockouts (24 in W x 7.75 in deep)	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Kit contents	2 box end walls and mounting hardware (20 screws, half used at each end)	A	S352 single sheet; oem_spec
Dimensions	24in W x 7.75in D	A	S165 p.11-34; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1004-01 Rev. 01: EWK1 / EWK2 / EWK1B / EWK2B box end wall kits	A	S352 single sheet; oem_spec
Identification features	Notched end of end wall faces front	A	same as above
Cross-links	Families: RP1, P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00244	EWK2B	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit without knockouts (24in W x 7.75in D) 24in

OEM part number	EWK2B	A	S165, S352 p.11-34; oem_spec
Description	End wall kit without knockouts (24in W x 7.75in D), Type 1 only	A	S165 p.11-34; oem_spec
Kit contents	2 box end walls and mounting hardware (20 screws, half used at each end)	A	S352 single sheet; oem_spec
Dimensions	24in W x 7.75in D	A	S165 p.11-34; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1004-01 Rev. 01: EWK1 / EWK2 / EWK1B / EWK2B box end wall kits	A	S352 single sheet; oem_spec
Identification features	Notched end of end wall faces front	A	same as above
Cross-links	Families: RP1, P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00242	EWK3	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in

OEM part number	EWK3	A	S165, S353 p.11-34; oem_spec
Description	End wall kit - open center space - ref B74FLR (20in W x 5.75in D), Type 1 only	A	S165 p.11-34; oem_spec
Kit contents	Open endwall and 8 screws; replaces blank endwall, mounted in lowest position	A	S353 single sheet; oem_spec
Dimensions	20in W x 5.75in D	A	S165 p.11-34; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1143-01 Rev. 00: EWK3 instructions for special open endwall	A	S353 single sheet; oem_spec
Cross-links	Families: RP1, P1, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00096	**BK1A**	Revised P1 bonding kit including service disconnect label	—	listed (2021)
EDH-SIE-00773	**BR2**	Siemens BQ/BQH/BQXD back mounting plate, 2P	Type BQ, BQH, BQXD; 2P A	unknown
EDH-SIE-00774	**BR3**	Siemens BQ/BQH/BQXD back mounting plate, 3P	Type BQ, BQH, BQXD; 3P A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00775	**BR4**	Siemens BQ/BQH/BQXD back mounting plate, 4P	Type BQ, BQH, BQXD; 4P **A**	unknown
EDH-SIE-00768	**FP9508**	Siemens BQ/BQH face mount plate, 1P	Type BQ, BQH; 1P **A**	unknown
EDH-SIE-00769	**FP9555**	Siemens BQ/BQH face mount plate, 2P	Type BQ, BQH; 2P **A**	unknown
EDH-SIE-00770	**FP9556**	Siemens BQ/BQH face mount plate, 3P	Type BQ, BQH; 3P **A**	unknown
EDH-SIE-00095	**IMK1**	Interior mounting kit with adjustment provisions for P1/P2/P3	—	listed (2021)
EDH-SIE-00014	**MBKBFA**	P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)	BL, BQD, GB (back-fed, installed in the unit space; breaker purchased **A**	unknown
EDH-SIE-00771	**SMB6R**	Siemens BQ mounting bracket 1P/2P/3P	Type BQ; 1P, 2P, 3P **A**	unknown
EDH-SIE-00772	**TCH65K**	Siemens BQ mounting adapter	Type BQ **A**	unknown

EDH-SIE-00096	**BK1A**	Siemens	hardware-kit	LISTED (2021)

Revised P1 bonding kit including service disconnect label

OEM part number	BK1A	**A**	S165, S385 p.11-20; oem_spec
Alternate / superseded numbers	UPC 887621572570	**A**	S385 alias; card 11-A-1096-01; oem_spec
Description	Revised P1 bonding kit including service disconnect label	**A**	S165 p.11-20; oem_spec
Kit contents	qty/kit 1	**A**	same as above
	Bonding screw (green head)	**A**	S385 card 11-A-1096-01; oem_spec
Torque values	72 lb-in	**A**	same as above
OEM instruction document	Ensure thru-holes through neutral bus and barrier are aligned; drive bonding screw into base rail; tighten to 72 lb-in	**A**	same as above
Status	listed (2021)	**A**	S165 p.11-20; oem_spec
Identification features	Drawing ref 11-A-2024-01	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00773	**BR2**	Siemens	hardware-kit	STATUS UNKNOWN

Siemens BQ/BQH/BQXD back mounting plate, 2P

OEM part number	BR2	**A**	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	BQ/BQH/BQXD back mounting plate, 2P.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Type BQ, BQH, BQXD; 2P	**A**	same as above
Kit contents	Standard package: 10 pieces	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface/enclosure mounting accessory for BQ - not panelboard interior hardware.*		

EDH-SIE-00774	**BR3**	Siemens	hardware-kit	STATUS UNKNOWN

Siemens BQ/BQH/BQXD back mounting plate, 3P

OEM part number	BR3	**A**	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	BQ/BQH/BQXD back mounting plate, 3P.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Type BQ, BQH, BQXD; 3P	**A**	same as above
Kit contents	Standard package: 10 pieces	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface/enclosure mounting accessory for BQ - not panelboard interior hardware.*		

EDH-SIE-00775	BR4	Siemens	hardware-kit	STATUS UNKNOWN

Siemens BQ/BQH/BQXD back mounting plate, 4P

OEM part number	BR4	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	BQ/BQH/BQXD back mounting plate, 4P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type BQ, BQH, BQXD; 4P	A	same as above
Kit contents	Standard package: 10 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface/enclosure mounting accessory for BQ - not panelboard interior hardware.*		

EDH-SIE-00768	FP9508	Siemens	hardware-kit	STATUS UNKNOWN

Siemens BQ/BQH face mount plate, 1P

OEM part number	FP9508	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	BQ/BQH face mount plate, 1P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type BQ, BQH; 1P	A	same as above
Kit contents	Standard package: 10 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface/enclosure mounting accessory for BQ - not panelboard interior hardware.*		

EDH-SIE-00769	FP9555	Siemens	hardware-kit	STATUS UNKNOWN

Siemens BQ/BQH face mount plate, 2P

OEM part number	FP9555	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	BQ/BQH face mount plate, 2P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type BQ, BQH; 2P	A	same as above
Kit contents	Standard package: 10 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface/enclosure mounting accessory for BQ - not panelboard interior hardware.*		

EDH-SIE-00770	FP9556	Siemens	hardware-kit	STATUS UNKNOWN

Siemens BQ/BQH face mount plate, 3P

OEM part number	FP9556	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	BQ/BQH face mount plate, 3P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type BQ, BQH; 3P	A	same as above
Kit contents	Standard package: 10 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface/enclosure mounting accessory for BQ - not panelboard interior hardware.*		

EDH-SIE-00095	IMK1	Siemens	hardware-kit	LISTED (2021)

Interior mounting kit with adjustment provisions for P1/P2/P3

OEM part number	IMK1	A	S165, S384, S254 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	Interior mounting kit with adjustment provisions for P1/P2/P3	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	Interior adjusting kit	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Application	Install on every panel; leveling provision at each corner of P1, P2, P3 & S3 base rails and S1, S2, SE brackets (alternate location)	A	S384 card 11-A-1002-01; oem_spec
Kit contents	qty/kit 1	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	4 leveling screws; 4 wing nuts	A	S384 card 11-A-1002-01; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1002-01 Rev. 4: Mounting and Leveling Kit IMK1 instruction card	A	same as above
Status	listed (2021)	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-A-2024-01	A	same as above
Cross-links	Families: RP1, P1, S1/S2, SE, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00014	MBKBFA	Siemens	hardware-kit	STATUS UNKNOWN

P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)

OEM part number	MBKBFA	A	S173, S267 oem_spec
Description	KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER; field installable kit	A	S173 oem_spec
Application	main (back-fed breaker in unit space; uses 2 or 3 positions of unit space)	A	S165 p.11-7 note 1; oem_spec
	Main in panels rated 250 A or less	A	S267 pp. 2-3; oem_spec
Breaker compatibility	BL, BQD, GB (back-fed, installed in the unit space; breaker purchased separately). GB mains only in panels with GB branches and 3-phase only; BL/BQD mains only in panels intended for BL/BQD branches.	A	same as above
Kit contents	1 blank filler; 1 MAIN label; 1 neutral lug assembly; 1 1/4-20 Belleville washer nut	A	same as above
	'MAIN' label and instructions for back-fed BL/BQD or GB main (s8 table: 'Label Kit # MBKBFA ... MAIN label and'; s7 lists 'MBKDFA - Back Fed Main Breaker Label and Instructions for BL/BQD or GB breaker' (likely typo of MBKBFA))	B	S172, S171 oem_spec
Fasteners	Breaker hooks onto barrier fingers by rear notch; stabs secured to phase bus with #10-32 SEMS screws as for branch breakers	A	S267 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1114-01 Rev. 00: P1-250 Panelboard Kit MBKBFA for BL/BQD/GB Main Breaker Installation Instructions	A	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Is 'MBKDFA' in the flyer (s7) a typo of MBKBFA?*		
Open question	*Does the kit include a hold-down/retaining clip as required for back-fed breakers? Not stated.*		

EDH-SIE-00771	SMB6R	Siemens	hardware-kit	STATUS UNKNOWN

Siemens BQ mounting bracket 1P/2P/3P

OEM part number	SMB6R	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	BQ mounting bracket 1P/2P/3P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type BQ; 1P, 2P, 3P	A	same as above
Kit contents	Standard package: 6 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface/enclosure mounting accessory for BQ - not panelboard interior hardware.*		

EDH-SIE-00772	TCH65K	Siemens	hardware-kit	STATUS UNKNOWN

Siemens BQ mounting adapter

OEM part number	TCH65K	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	BQ mounting adapter.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type BQ	A	same as above
Kit contents	Standard package: 500 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface/enclosure mounting accessory for BQ - not panelboard interior hardware.*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00819	**LP3RHP01**	Siemens 3R/12 hinge pin 0.188 in dia. steel zinc plated	—	unknown
EDH-SIE-00423	**LPJSPDNUT01**	Panelboard trim J-type speed nut kit (25)	—	unknown
EDH-SIE-00815	**LPTS01**	Siemens Trim screw	—	unknown
EDH-SIE-00767	**MB120**	Siemens BQ/BQH mounting clips, 1P	Type BQ, BQH; 1P A	unknown
EDH-SIE-00091	**P1SCRWS**	P1 branch breaker mounting screws	—	listed (2021)

EDH-SIE-00819	LP3RHP01	Siemens	fastener	STATUS UNKNOWN

Siemens 3R/12 hinge pin 0.188 in dia. steel zinc plated

OEM part number	LP3RHP01	A	S165 pp. 11-19..11-20, Spare Parts Kits for Revised P1 Panels; oem_spec
Description	3R/12 hinge pin 0.188 in dia. steel zinc plated, pack of 12 (kit pending).	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00423	LPJSPDNUT01	Siemens lineage	fastener	STATUS UNKNOWN

Panelboard trim J-type speed nut kit (25)

OEM part number	LPJSPDNUT01	A	S396, S165 single sheet; oem_spec
Description	Replacement J-nuts (J-type speed nut) for lighting panel fronts and deadfronts, pack of 25.	A	S165 pp. 11-19..11-20, Spare Parts Kits for Revised P1 Panels; oem_spec
Installation location	Edge of deadfront or enclosure flange, depending on front/trim style	A	S396 single sheet; oem_spec
Kit contents	25 J-type speed nuts, Siemens piece no. 11-A-1820-01	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1176-01 Rev. 00: LPJSPDNUT01 J-type speed nut replacement kit	A	same as above
Cross-links	Families: RP1, P1, S1/S2, P2, P3		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00815	LPTS01	Siemens	fastener	STATUS UNKNOWN

Siemens Trim screw

OEM part number	LPTS01	A	S165 pp. 11-19..11-20, Spare Parts Kits for Revised P1 Panels; oem_spec
Description	Trim screw, lighting panel front, 0.547 in length, 1/4-20 machine screw thread, pack of 25 (kit pending at time of printing).	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00767	MB120	Siemens	fastener	STATUS UNKNOWN

Siemens BQ/BQH mounting clips, 1P

OEM part number	MB120	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	BQ/BQH mounting clips, 1P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type BQ, BQH; 1P	A	same as above
Kit contents	Standard package: 20 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		
Open question	*Surface/enclosure mounting accessory for BQ - not panelboard interior hardware.*		

EDH-SIE-00091	P1SCRWS	Siemens	fastener	LISTED (2021)

P1 branch breaker mounting screws

OEM part number	P1SCRWS	A	S165, S255 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	P1 branch breaker mounting screws, pack of 42 (part 11-A-1505-03), 10-32 x 0.312in hex washer head - do not substitute	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	Replacement special 10-32 x 9/32 in pre-assembled screw / cup washer fasteners used to install branch breakers in P1 panelboards; screws not used should be installed in all open breaker positions	A	S255 single page; oem_spec
Kit contents	qty/kit 42	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Fasteners	10-32 x 0.312in hex washer head screw, part 11-A-1505-03	A	same as above
	10-32 x 9/32 in pre-assembled screw with cup washer	A	S255 single page; oem_spec
Torque values	20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1072-01 Rev. 1: P1SCRWS Branch Connector Screw Kit Instructions	A	same as above
Status	listed (2021)	A	S165 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-A-2010-01	A	same as above
Cross-links	Families: RP1, P1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00013	**MBKVA5363JD**	RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)	—	'to be available 2021' / 'tbd - being developed'

EDH-SIE-00013	MBKVA5363JD	Siemens	conversion-kit	'TO BE AVAILABLE 2021'

RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)

OEM part number	MBKVA5363JD	A	S165 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Allows 3VA53/63 in old 400A RP1 with small deadfront opening; no access to breaker adjustments without removing deadfront	A	same as above
Application	main (400A)	A	same as above
Status	'to be available 2021' / 'tbd - being developed'	A	S165 pp.11-13, 11-20; oem_spec
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Was MBKVA5363JD ever released? SpeedFax 2021 lists it as tbd/being developed*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00812	**A01QR2**	Siemens QR auxiliary switch 1A-1B	QR A	unknown
EDH-SIE-00813	**A02QR2**	Siemens QR auxiliary switch 2A-2B	QR A	unknown
EDH-SIE-00805	**CQDA1**	Siemens CQD-series accessory module: Auxiliary switch 1A-1B, 240 Vac / 125 Vdc	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00809	**CQDA1BA**	Siemens CQD-series accessory module: Alarm and auxiliary switch combination (built to order)	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00806	**CQDA2**	Siemens CQD-series accessory module: Auxiliary switch 2A-2B, 240 Vac / 125 Vdc	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00807	**CQDBA**	Siemens CQD-series accessory module: Alarm switch, 240 Vac / 125 Vdc	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00801	**CQDST12**	Siemens CQD-series accessory module: Shunt trip 12 Vdc	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00796	**CQDST120**	Siemens CQD-series accessory module: Shunt trip 120 Vac	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00808	**CQDST120AAS**	Siemens CQD-series accessory module: Shunt trip 120 Vac + auxiliary switch combination (built to order)	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00804	**CQDST125**	Siemens CQD-series accessory module: Shunt trip 125 Vdc	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00802	**CQDST24**	Siemens CQD-series accessory module: Shunt trip 24 Vdc	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00797	**CQDST240**	Siemens CQD-series accessory module: Shunt trip 240 Vac (built to order)	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00798	**CQDST277**	Siemens CQD-series accessory module: Shunt trip 277 Vac (built to order)	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00803	**CQDST48**	Siemens CQD-series accessory module: Shunt trip 48 Vdc	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00799	**CQDST480**	Siemens CQD-series accessory module: Shunt trip 480 Vac (built to order)	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00800	**CQDST600**	Siemens CQD-series accessory module: Shunt trip 600 Vac	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2 **A**	unknown
EDH-SIE-00766	**ECQML12**	Siemens Mechanical interlock bracket for 1 in breakers	Type QP, BL, BQ; designed for 1 in breaker **A**	unknown
EDH-SIE-00794	**EX11**	Siemens Replacement handle extension (one shipped with breaker) for All MD, ND, PD, RD	All MD, ND, PD, RD **A**	unknown
EDH-SIE-00810	**S01QR2**	Siemens QR shunt trip 120-240 Vac / 48 Vdc	QR **A**	unknown
EDH-SIE-00811	**S07QR2**	Siemens QR shunt trip 24 Vdc	QR **A**	unknown
EDH-SIE-00795	**SBMIQR**	Siemens QR handle sliding-bar interlock	QR **A**	unknown

EDH-SIE-00812	A01QR2	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens QR auxiliary switch 1A-1B

OEM part number	A01QR2	**A**	S203 p. 7-41, QR Accessories; oem_spec
Description	Auxiliary switch single 1A-1B, 250 Vac/125 Vdc, 5 A ac/0.5 A dc.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	QR	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00813	A02QR2	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens QR auxiliary switch 2A-2B

OEM part number	A02QR2	**A**	S203 p. 7-41, QR Accessories; oem_spec
Description	Auxiliary switch double 2A-2B, 250 Vac/125 Vdc.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	QR	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00805	CQDA1	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Auxiliary switch 1A-1B, 240 Vac / 125 Vdc

OEM part number	CQDA1	**A**	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Auxiliary switch 1A-1B, 240 Vac / 125 Vdc; side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00809	CQDA1BA	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Alarm and auxiliary switch combination (built to order)

OEM part number	CQDA1BA	**A**	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Alarm and auxiliary switch combination (built to order); side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00806	CQDA2	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Auxiliary switch 2A-2B, 240 Vac / 125 Vdc

OEM part number	CQDA2	A	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Auxiliary switch 2A-2B, 240 Vac / 125 Vdc; side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00807	CQDBA	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Alarm switch, 240 Vac / 125 Vdc

OEM part number	CQDBA	A	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Alarm switch, 240 Vac / 125 Vdc; side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00801	CQDST12	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Shunt trip 12 Vdc

OEM part number	CQDST12	A	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Shunt trip 12 Vdc; side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00796	CQDST120	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Shunt trip 120 Vac

OEM part number	CQDST120	A	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Shunt trip 120 Vac; side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00808	CQDST120AAS	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Shunt trip 120 Vac + auxiliary switch combination (built to order)

OEM part number	CQDST120AAS	A	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Shunt trip 120 Vac + auxiliary switch combination (built to order); side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00804	CQDST125	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Shunt trip 125 Vdc

OEM part number	CQDST125	A	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Shunt trip 125 Vdc; side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00802	CQDST24	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Shunt trip 24 Vdc

OEM part number	CQDST24	A	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Shunt trip 24 Vdc; side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00797	CQDST240	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Shunt trip 240 Vac (built to order)

OEM part number	CQDST240	A	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Shunt trip 240 Vac (built to order); side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00798	CQDST277	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Shunt trip 277 Vac (built to order)

OEM part number	CQDST277	A	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Shunt trip 277 Vac (built to order); side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00803	CQDST48	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Shunt trip 48 Vdc

OEM part number	CQDST48	A	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Shunt trip 48 Vdc; side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00799	CQDST480	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Shunt trip 480 Vac (built to order)

OEM part number	CQDST480	A	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Shunt trip 480 Vac (built to order); side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00800	CQDST600	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens CQD-series accessory module: Shunt trip 600 Vac

OEM part number	CQDST600	A	S203 p. 7-35, BQD/CQD/xGB/GG Accessories (each accessory adds a 1-pole space); oem_spec
Description	Shunt trip 600 Vac; side-mounted accessory module for BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2; adds 1-pole space for accessory.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, BQD6, CQD, CQD6, NGG, HGG, LGG, NGB, HGB, LGB, NGB2, HGB2, LGB2	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog does not explicitly state field installability; confirm with installation instructions.*		

EDH-SIE-00766	ECQML12	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens Mechanical interlock bracket for 1 in breakers

OEM part number	ECQML12	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Mechanical interlock bracket for 1 in breakers.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type QP, BL, BQ; designed for 1 in breaker	A	same as above
Kit contents	Standard package: 10 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BL, BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00794	EX11	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens Replacement handle extension (one shipped with breaker) for All MD, ND, PD, RD

OEM part number	EX11	A	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Replacement handle extension (one shipped with breaker).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All MD, ND, PD, RD	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6), Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6), Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00810	S01QR2	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens QR shunt trip 120-240 Vac / 48 Vdc

OEM part number	S01QR2	A	S203 p. 7-41, QR Accessories; oem_spec
Description	Shunt trip, 120-240 Vac / 48 Vdc, inrush 2.0 A ac / 1.8 A dc (S01QR2A = with auxiliary switch).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QR	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00811	S07QR2	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens QR shunt trip 24 Vdc

OEM part number	S07QR2	A	S203 p. 7-41, QR Accessories; oem_spec
Description	Shunt trip 24 Vdc, inrush 1.1 A (S07QR2A = with auxiliary switch).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QR	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00795	SBMIQR	Siemens	breaker-accessory	STATUS UNKNOWN

Siemens QR handle sliding-bar interlock

OEM part number	SBMIQR	**A**	S203 p. 7-41, QR External Accessories; oem_spec
Description	Handle sliding-bar interlock for QR.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	QR	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Dimensions, Material, Status		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00789	**BQDHBD**	Siemens Handle blocking device for All BQD, CQD, GG, GB	All BQD, CQD, GG, GB **A**	unknown
EDH-SIE-00779	**BQDHT2**	Siemens Handle tie with padlock device for BQD, NGB, HGB, LGB	BQD, NGB, HGB, LGB **A**	unknown
EDH-SIE-00780	**BQDHT3**	Siemens Handle tie with padlock device for BQD, NGB, HGB, LGB	BQD, NGB, HGB, LGB **A**	unknown
EDH-SIE-00790	**E2HBL**	Siemens Handle blocking device for All ED	All ED **A**	unknown
EDH-SIE-00765	**ECBX231M**	Siemens Handle block	BL, BLF2, BAF2, BLE, QAF2, QPF2, QE (per pp. 7-19, 7-40) **A**	unknown
EDH-SIE-00776	**ECQL1**	Siemens handle blocking device (per photo caption)	Type QP, BL, BQ, BQXD 1P (inferred from table row) **C**	unknown
EDH-SIE-00764	**ECQTH3**	Siemens Handle tie, 2P, Type QP/BL	Type QP, BL; 2P **A**	unknown
EDH-SIE-00791	**FD6HB1**	Siemens Handle blocking device for All FD	All FD **A**	unknown
EDH-SIE-00788	**HBLQR**	Siemens Handle blocking device for All QR	All QR **A**	unknown
EDH-SIE-00792	**JD6HBL**	Siemens Handle blocking device for All JD, LD, LMD	All JD, LD, LMD **A**	unknown
EDH-SIE-00793	**MN6BL**	Siemens Handle blocking device for All MD, ND, PD, RD	All MD, ND, PD, RD **A**	unknown

EDH-SIE-00789	BQDHBD	Siemens	handle-lock	STATUS UNKNOWN

Siemens Handle blocking device for All BQD, CQD, GG, GB

OEM part number	BQDHBD	**A**	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Handle blocking device. Handle blocking devices hold breaker ON or OFF; not a lockout/tagout device.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	All BQD, CQD, GG, GB	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00779	BQDHT2	Siemens	handle-lock	STATUS UNKNOWN

Siemens Handle tie with padlock device for BQD, NGB, HGB, LGB

OEM part number	BQDHT2	**A**	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Handle tie with padlock device, 2 adjacent handles. Handle ties provide simultaneous switching of 2 or 3 adjacent handles; do not provide common trip.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	BQD, NGB, HGB, LGB	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00780	BQDHT3	Siemens	handle-lock	STATUS UNKNOWN

Siemens Handle tie with padlock device for BQD, NGB, HGB, LGB

OEM part number	BQDHT3	A	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Handle tie with padlock device, 3 adjacent handles. Handle ties provide simultaneous switching of 2 or 3 adjacent handles; do not provide common trip.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BQD, NGB, HGB, LGB	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00790	E2HBL	Siemens	handle-lock	STATUS UNKNOWN

Siemens Handle blocking device for All ED

OEM part number	E2HBL	A	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Handle blocking device, all ED. Handle blocking devices hold breaker ON or OFF; not a lockout/tagout device.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All ED	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00765	ECBX231M	Siemens	handle-lock	STATUS UNKNOWN

Siemens Handle block

OEM part number	ECBX231M	A	S203 p. 7-158, Circuit Breaker Accessories (General) and p. 7-19/7-40; oem_spec
Description	Handle block.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	BL, BLF2, BAF2, BLE, QAF2, QPF2, QE (per pp. 7-19, 7-40)	A	same as above
Kit contents	Standard package: not stated	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BL, BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00776	ECQL1	Siemens	handle-lock	STATUS UNKNOWN

Siemens handle blocking device (per photo caption)

OEM part number	ECQL1	B	S203 p. 7-159 (photo caption under Handle Blocking Device); oem_drawing
Description	Handle blocking device for holding breaker ON or OFF (not a lockout/tagout device); number taken from photo caption since table text prints ECQTH2/ECQTH3.	B	same as above
Application	accessory	B	same as above
Breaker compatibility	Type QP, BL, BQ, BQXD 1P (inferred from table row)	C	S203 p. 7-158; inference
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BL, BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		
Open question	*Verify ECQL1 against a Siemens price book.*		

EDH-SIE-00764	ECQTH3	Siemens	handle-lock	STATUS UNKNOWN

Siemens Handle tie, 2P, Type QP/BL

OEM part number	ECQTH3	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Handle tie, 2P, Type QP/BL.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type QP, BL; 2P	A	same as above
Kit contents	Standard package: 50 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BL		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog table also prints ECQTH2/ECQTH3 under "Handle Blocking Device" (QP/BL/BQ 1P; QT-Duplex) - apparent typesetting error; photos caption ECQL1 and ECBX231M as handle blocking devices.*		

EDH-SIE-00791	FD6HB1	Siemens	handle-lock	STATUS UNKNOWN

Siemens Handle blocking device for All FD

OEM part number	FD6HB1	A	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Handle blocking device, all FD. Handle blocking devices hold breaker ON or OFF; not a lockout/tagout device.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All FD	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00788	HBLQR	Siemens	handle-lock	STATUS UNKNOWN

Siemens Handle blocking device for All QR

OEM part number	HBLQR	A	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; p. 7-41 QR External Accessories; oem_spec
Description	Handle blocking device, all QR. Handle blocking devices hold breaker ON or OFF; not a lockout/tagout device.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All QR	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00792	JD6HBL	Siemens	handle-lock	STATUS UNKNOWN

Siemens Handle blocking device for All JD, LD, LMD

OEM part number	JD6HBL	A	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Handle blocking device. Handle blocking devices hold breaker ON or OFF; not a lockout/tagout device.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All JD, LD, LMD	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6), Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00793	MN6BL	Siemens	handle-lock	STATUS UNKNOWN

Siemens Handle blocking device for All MD, ND, PD, RD

OEM part number	MN6BL	**A**	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Handle blocking device. Handle blocking devices hold breaker ON or OFF; not a lockout/tagout device.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	All MD, ND, PD, RD	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6), Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6), Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Dimensions, Material, Status		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00782	**BQDPLD**	Siemens Padlocking device (OFF) for All BQD, CQD, NGB, HGB, LGB	All BQD, CQD, NGB, HGB, LGB **A**	unknown
EDH-SIE-00753	**ECPLD1**	Siemens Padlocking device for locking breaker in OFF position, 1P	Type QP, BL, QAF2, QPF2, QE, QT-Duplex, BQ, BQXD; 1P **A**	unknown
EDH-SIE-00754	**ECPLD1R**	Siemens Padlocking device, red, 1P	Type QP, BL, QAF2, QPF, QE, QT-Duplex, BQ, BQXD; 1P **A**	unknown
EDH-SIE-00755	**ECPLD2**	Siemens Padlocking device, 2P	Type QP, BL, QAF2, QPF, QE, QT-Triplex & Quadplex, BQ, BQXD; 2P **A**	unknown
EDH-SIE-00756	**ECPLD2R**	Siemens Padlocking device, red, 2P	Type QP, BL, QAF2, QPF, QE, QT-Triplex & Quadplex, BQ, BQXD; 2P **A**	unknown
EDH-SIE-00757	**ECPLD3**	Siemens Padlocking device, 3P	Type QP, BL, QAF2, QPF, QE, BQ; 3P **A**	unknown
EDH-SIE-00758	**ECPLD3R**	Siemens Padlocking device, red, 3P (printed "US2:ECPLD3R")	Type QP, BL, QAF2, QPF, QE, BQ; 3P **A**	unknown
EDH-SIE-00759	**ECQLD3**	Siemens Padlocking device listed under padlocking devices, 1P	Type QP, BL, BQ, BQXD; 1P **A**	unknown
EDH-SIE-00762	**ECQTH4**	Siemens Device listed under Padlocking Device for (3) 1P breakers	Type QP, BL, BQH; designed for (3) 1P breakers **A**	unknown
EDH-SIE-00784	**ED2HPL**	Siemens Padlocking device (OFF) for All ED	All ED **A**	unknown
EDH-SIE-00785	**FD6PL1**	Siemens Padlocking device (OFF) for All FD	All FD **A**	unknown
EDH-SIE-00783	**HPLG**	Siemens Padlocking device (OFF) for NGG, HGG, LGG	NGG, HGG, LGG **A**	unknown
EDH-SIE-00781	**HPLQR**	Siemens Padlocking device (OFF) for All QR	All QR **A**	unknown
EDH-SIE-00786	**JD6HPL**	Siemens Padlocking device (OFF) for All JD, LD, LMD	All JD, LD, LMD **A**	unknown
EDH-SIE-00787	**MN6PLD**	Siemens Padlocking device (OFF) for All MD, ND, PD, RD	All MD, ND, PD, RD **A**	unknown

EDH-SIE-00782	BQDPLD	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device (OFF) for All BQD, CQD, NGB, HGB, LGB

OEM part number	BQDPLD	A	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Padlocking device (OFF). Padlocking devices are for locking breaker in OFF position.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All BQD, CQD, NGB, HGB, LGB	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: BQD / CQD (incl. BQD6, CQD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00753	ECPLD1	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device for locking breaker in OFF position, 1P

OEM part number	ECPLD1	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Padlocking device for locking breaker in OFF position, 1P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type QP, BL, QAF2, QPF2, QE, QT-Duplex, BQ, BQXD; 1P	A	same as above
Kit contents	Standard package: 3 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BL, BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00754	ECPLD1R	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device, red, 1P

OEM part number	ECPLD1R	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Padlocking device, red, 1P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type QP, BL, QAF2, QPF, QE, QT-Duplex, BQ, BQXD; 1P	A	same as above
Kit contents	Standard package: 3 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BL, BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00755	ECPLD2	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device, 2P

OEM part number	ECPLD2	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Padlocking device, 2P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type QP, BL, QAF2, QPF, QE, QT-Triplex & Quadplex, BQ, BQXD; 2P	A	same as above
Kit contents	Standard package: 3 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BL, BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00756	ECPLD2R	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device, red, 2P

OEM part number	ECPLD2R	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Padlocking device, red, 2P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type QP, BL, QAF2, QPF, QE, QT-Triplex & Quadplex, BQ, BQXD; 2P	A	same as above
Kit contents	Standard package: 3 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BL, BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00757	ECPLD3	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device, 3P

OEM part number	ECPLD3	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Padlocking device, 3P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type QP, BL, QAF2, QPF, QE, BQ; 3P	A	same as above
Kit contents	Standard package: 1 piece	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BL, BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00758	ECPLD3R	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device, red, 3P (printed "US2:ECPLD3R")

OEM part number	ECPLD3R	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Padlocking device, red, 3P (printed "US2:ECPLD3R").	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type QP, BL, QAF2, QPF, QE, BQ; 3P	A	same as above
Kit contents	Standard package: 1 piece	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BL, BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00759	ECQLD3	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device listed under padlocking devices, 1P

OEM part number	ECQLD3	A	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Padlocking device listed under padlocking devices, 1P.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Type QP, BL, BQ, BQXD; 1P	A	same as above
Kit contents	Standard package: 10 pieces	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BL, BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00762	ECQTH4	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Device listed under Padlocking Device for (3) 1P breakers

OEM part number	ECQTH4	**A**	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Device listed under Padlocking Device for (3) 1P breakers.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Type QP, BL, BQH; designed for (3) 1P breakers	**A**	same as above
Kit contents	Standard package: 1 piece	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2 · Breakers: BL		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog lists ECQTH4 under Padlocking Device but "designed for (3) 1P breakers" and photo-grouped with padlocks - is it a 3-pole handle tie with padlock provision?*		

EDH-SIE-00784	ED2HPL	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device (OFF) for All ED

OEM part number	ED2HPL	**A**	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Padlocking device (OFF), all ED. Padlocking devices are for locking breaker in OFF position.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	All ED	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00785	FD6PL1	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device (OFF) for All FD

OEM part number	FD6PL1	**A**	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Padlocking device (OFF), all FD. Padlocking devices are for locking breaker in OFF position.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	All FD	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Material, Status		
Open question	*Photo caption reads "FD6PLI"; table reads FD6PL1.*		

EDH-SIE-00783	HPLG	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device (OFF) for NGG, HGG, LGG

OEM part number	HPLG	**A**	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Padlocking device (OFF). Padlocking devices are for locking breaker in OFF position.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	NGG, HGG, LGG	**A**	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00781	HPLQR	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device (OFF) for All QR

OEM part number	HPLQR	A	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; p. 7-41 QR External Accessories; oem_spec
Description	Padlocking device (OFF), all QR. Padlocking devices are for locking breaker in OFF position.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All QR	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00786	JD6HPL	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device (OFF) for All JD, LD, LMD

OEM part number	JD6HPL	A	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Padlocking device (OFF). Padlocking devices are for locking breaker in OFF position.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All JD, LD, LMD	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6), Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00787	MN6PLD	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device (OFF) for All MD, ND, PD, RD

OEM part number	MN6PLD	A	S203 p. 7-205, Molded Case Circuit Breakers - External Accessories; oem_spec
Description	Padlocking device (OFF). Padlocking devices are for locking breaker in OFF position.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All MD, ND, PD, RD	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2, P4, P5, P3 · Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6), Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6), Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Dimensions, Material, Status		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00392	**LPDC01**	Panelboard directory cards (10)	—	unknown
EDH-SIE-00816	**LPKEY01A**	Siemens Key B363A for standard panelboard lock series 11-1895-0x / FAS-Latch	—	unknown
EDH-SIE-00817	**LPKEY01B**	Siemens Key B363A for standard panelboard lock / FAS-Latch	—	unknown
EDH-SIE-00393	**LPLOCK01A**	Replacement panelboard trim door lock (14 gage doors)	—	unknown
EDH-SIE-00394	**LPLOCK02A**	Replacement panelboard trim door lock (12 gage doors)	—	unknown
EDH-SIE-00818	**LPLOCK03A**	Siemens FAS-Latch replacement lock kit with two B363A keys	—	unknown
EDH-SIE-00814	**MCHK**	Siemens Metal card holder kit	—	unknown
EDH-SIE-00397	**NBK01A**	Revised P1 circuit numbering strip kit 1-60	—	unknown
EDH-SIE-00398	**NBK02A**	Revised P1 circuit numbering strip kit 61-120	—	unknown
EDH-SIE-00399	**NBK03A**	Revised P1 circuit numbering strip kit 121-240	—	unknown

EDH-SIE-00392	LPDC01	Siemens lineage	other	STATUS UNKNOWN

Panelboard directory cards (10)

OEM part number	LPDC01	A	S350 single sheet; oem_spec
	LPDC01	A	S254 p. 11-48 (revised 05/15/18); oem_spec
Description	Directory card, pack of 10 (ref. 12-1110-01)	A	same as above
Kit contents	10 white card-stock directory cards 12-1110-01 (5 in W x 11 in H, NEMA numbering one side, vertical/custom other)	A	S350 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1184-01 Rev. 00: LPDC01 panelboard directory card kit	A	same as above
Requires (stated)	LPDC02 vinyl pouch if storage missing	A	S350 single sheet; oem_spec
Cross-links	Families: RP1, P2, P3		

EDH-SIE-00816	LPKEY01A	Siemens	other	STATUS UNKNOWN

Siemens Key B363A for standard panelboard lock series 11-1895-0x / FAS-Latch

OEM part number	LPKEY01A	A	S165 pp. 11-19..11-20, Spare Parts Kits for Revised P1 Panels; oem_spec
Description	Key B363A for standard panelboard lock series 11-1895-0x / FAS-Latch, pack of 4.	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00817	LPKEY01B	Siemens	other	STATUS UNKNOWN

Siemens Key B363A for standard panelboard lock / FAS-Latch

OEM part number	LPKEY01B	A	S165 pp. 11-19..11-20, Spare Parts Kits for Revised P1 Panels; oem_spec
Description	Key B363A for standard panelboard lock / FAS-Latch, pack of 25.	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00393	LPLOCK01A	Siemens lineage	other	STATUS UNKNOWN

Replacement panelboard trim door lock (14 gage doors)

OEM part number	LPLOCK01A	A	S351 single sheet; oem_spec
Kit contents	1 replacement lock (11-1895-01, -02 or -03) and 2 keys B363A	A	same as above
Dimensions	For door holes 3.120 in (+0.005/-0.000) H x 1.135 in (+0.005/-0.000) W	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1175-01 Rev. 00: LPLOCK01A / LPLOCK02A replacement panelboard door locks	A	same as above
Cross-links	Families: RP1, P2, P3		

EDH-SIE-00394	LPLOCK02A	Siemens lineage	other	STATUS UNKNOWN

Replacement panelboard trim door lock (12 gage doors)

OEM part number	LPLOCK02A	A	S351 single sheet; oem_spec
Kit contents	1 replacement lock (11-1895-01, -02 or -03) and 2 keys B363A	A	same as above
Dimensions	For door holes 3.120 in (+0.005/-0.000) H x 1.135 in (+0.005/-0.000) W	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1175-01 Rev. 00: LPLOCK01A / LPLOCK02A replacement panelboard door locks	A	same as above
Cross-links	Families: RP1, P2, P3		

EDH-SIE-00818	LPLOCK03A	Siemens	other	STATUS UNKNOWN

Siemens FAS-Latch replacement lock kit with two B363A keys

OEM part number	LPLOCK03A	A	S165 pp. 11-19..11-20, Spare Parts Kits for Revised P1 Panels; oem_spec
Description	FAS-Latch replacement lock kit with two B363A keys, for 10 gauge steel lighting panel Type 1 fronts (drawing 11-1895-63).	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00814	MCHK	Siemens	other	STATUS UNKNOWN

Siemens Metal card holder kit

OEM part number	MCHK	A	S165 pp. 11-19..11-20, Spare Parts Kits for Revised P1 Panels; oem_spec
Description	Metal card holder kit, field installable (stick-on with double sided tape).	A	same as above
Cross-links	Families: RP1, P1, P2, P3, S1/S2		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00397	NBK01A	Siemens lineage	other	STATUS UNKNOWN

Revised P1 circuit numbering strip kit 1-60

OEM part number	NBK01A	A	S356, S165 single sheet; oem_spec
Description	Adhesive circuit number label strips 1-60; NEMA or Standard patterns; 1/2 in tall numbers for BT breakers, 1 in for 1 in unit space; apply above 40 F	A	S356 single sheet; oem_spec
	Number strips 1-60, stick-on, P1 series (incl. 1/2 in spacing numbers for BT twins); replaces NBK03.	A	S165 pp. 11-19..11-20, Spare Parts Kits for Revised P1 Panels; p. 11-35 Circuit Numbering; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1197-00 Rev. 00: NBK01A / NBK02A / NBK03A circuit numbering strips for Revised P1	A	S356 single sheet; oem_spec
Cross-links	Families: RP1, P1		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00398	NBK02A	Siemens lineage	other	STATUS UNKNOWN

Revised P1 circuit numbering strip kit 61-120

OEM part number	NBK02A	A	S356, S165 single sheet; oem_spec
Description	Adhesive circuit number label strips 61-120; NEMA or Standard patterns; 1/2 in tall numbers for BT breakers, 1 in for 1 in unit space; apply above 40 F	A	S356 single sheet; oem_spec
	Number strips 61-120, stick-on, P1 series; replaces NBK04-05.	A	S165 pp. 11-19..11-20, Spare Parts Kits for Revised P1 Panels; p. 11-35 Circuit Numbering; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1197-00 Rev. 00: NBK01A / NBK02A / NBK03A circuit numbering strips for Revised P1	A	S356 single sheet; oem_spec
Cross-links	Families: RP1, P1		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00399	NBK03A	Siemens lineage	other	STATUS UNKNOWN

Revised P1 circuit numbering strip kit 121-240

OEM part number	NBK03A	A	S356, S165 single sheet; oem_spec
Description	Adhesive circuit number label strips 121-240; NEMA or Standard patterns; 1/2 in tall numbers for BT breakers, 1 in for 1 in unit space; apply above 40 F	A	S356 single sheet; oem_spec
	Number strips 121-240, stick-on, P1 series; replaces NBK06-08.	A	S165 pp. 11-19..11-20, Spare Parts Kits for Revised P1 Panels; p. 11-35 Circuit Numbering; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1197-00 Rev. 00: NBK01A / NBK02A / NBK03A circuit numbering strips for Revised P1	A	S356 single sheet; oem_spec
Cross-links	Families: RP1, P1		
Not yet documented	Dimensions, Material, Status		

6.11 S1/S2 — Type S1 / S2 lighting panelboards

FAM-SIE-003 · panelboard · aka S1, S2, Sentron S1, Sentron S2 · markings: Siemens

Earlier Siemens (Sentron-era) bolt-on lighting panelboards preceding P1/P2. SpeedFax states that all original P1 kits for 250A-and-below panels work in 250A-max S1/S2 panels; 400/600A S1/S2 use the SMBK* strap kits. Revised P1 kits will not work in S1/S2.

Attribute	Value	Cl.	Sources
Status	discontinued; some kits available	A	S165 pp.11-15, 11-20; oem_spec
Successor	P1 / P2 (Implied by SpeedFax grouping; not stated explicitly)	C	S165 inference

Breaker families associated: BL, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)

Key documents: S165 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards

Also fits this family (entry printed elsewhere): MLKA1, MLKA3, MLKC1, MLKC3, 4MLKA1, 4MLKA3, 4MLKC1, 4MLKC3, MBKBL1, MBKBL3, MBKBC3, MBKNB1, MBKNB3, MBKED1, MBKED3, MBKQR1, MBKQR3, MBKFD1, MBKFD3, DFFP1A, DFFP01B, DFFPFD01, DFFPJD01, IMK1, LPJSPDNUT01, ECPLD1, ECPLD1R, ECPLD2, ECPLD2R, ECPLD3, ECPLD3R, ECQLD3, ECQTH4, ECQTH3, ECBX231M, ECQML12, MB120, FP9508, FP9555, FP9556, SMB6R, TCH65K, BR2, BR3, BR4, ECQL1, BQDHT2, BQDHT3, HPLQR, BQDPLD, HPLG, ED2HPL, FD6PL1, JD6HPL, MN6PLD, HBLQR, BQDHBD, E2HBL, FD6HB1, JD6HBL, MN6BL, EX11, SBMIQR, CQDST120, CQDST240, CQDST277, CQDST480, CQDST600, CQDST12, CQDST24, CQDST48, CQDST125, CQDA1, CQDA2, CQDBA, CQDST120AAS, CQDA1BA, S01QR2, S07QR2, A01QR2, A02QR2, MCHK, LPTS01, LPKEY01A, LPKEY01B, LPLOCK03A, LP3RHP01

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00056	**SMBKED1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph	2-pole ED2, ED4, ED6, HED4, HHED6 A	listed (2021)
EDH-SIE-00057	**SMBKED3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph	3-pole ED2, ED4, ED6, HED4, HHED6 A	listed (2021)
EDH-SIE-00058	**SMBKFD1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph	2-pole FXD6, FD6, HFXD6, HFD6 A	listed (2021)
EDH-SIE-00059	**SMBKFD3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph	3-pole FXD6, FD6, HFXD6, HFD6 A	listed (2021)
EDH-SIE-00060	**SMBKJD1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph	2-pole JD6, JXD6, HJD6, HJXD6 A	listed (2021)
EDH-SIE-00061	**SMBKJD3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph	3-pole JD6, JXD6, HJD6, HJXD6 A	listed (2021)

EDH-SIE-00056	SMBKED1	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph

OEM part number	SMBKED1	A	S165 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole ED2, ED4, ED6, HED4, HHED6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	2-pole ED2, ED4, ED6, HED4, HHED6	A	same as above
Current rating	125A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00057	SMBKED3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph

OEM part number	SMBKED3	A	S165 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole ED2, ED4, ED6, HED4, HHED6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	3-pole ED2, ED4, ED6, HED4, HHED6	A	same as above
Current rating	125A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00058	SMBKFD1	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph

OEM part number	SMBKFD1	A	S165 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole FXD6, FD6, HFXD6, HFD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	2-pole FXD6, FD6, HFXD6, HFD6	A	same as above
Current rating	250A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00059	SMBKFD3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph

OEM part number	SMBKFD3	A	S165 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole FXD6, FD6, HFXD6, HFD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	3-pole FXD6, FD6, HFXD6, HFD6	A	same as above
Current rating	250A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00060	SMBKJD1	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph

OEM part number	SMBKJD1	A	S165 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole JD6, JXD6, HJD6, HJXD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	2-pole JD6, JXD6, HJD6, HJXD6	A	same as above
Current rating	400A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00061	SMBKJD3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph

OEM part number	SMBKJD3	A	S165 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole JD6, JXD6, HJD6, HJXD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	3-pole JD6, JXD6, HJD6, HJXD6	A	same as above
Current rating	400A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00374	**MBKQRC1FK**	Column (C1) panelboard filler kit for vertically mounted 225A QR main/subfeed	—	unknown

EDH-SIE-00374	MBKQRC1FK	Siemens lineage	filler-plate	STATUS UNKNOWN

Column (C1) panelboard filler kit for vertically mounted 225A QR main/subfeed

OEM part number	MBKQRC1FK	A	S314 single sheet; oem_spec
Application	Vertically-mounted 225A MAX QR2 breaker (limited to 10 kA interrupting) in column panelboards, 1-ph or 3-ph, main or subfeed	A	same as above
Kit contents	QR deadfront plate for vertical C1; 4 #10-24 hex washer head screws; 4 #10 narrow washers; MAIN label; SERVICE DISCONNECT label; blank filler (used in place of plate when breaker not installed)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1137-01 Rev. 00: MBKQRC1FK C1 Filler Kit for QR Breaker Installation Instructions	A	same as above
Cross-links	Families: S1/S2		

6.12 SE — Type SE panelboard

FAM-SIE-004 · panelboard · aka SE panels · markings: Siemens

Legacy Siemens panelboard type grouped with S1/S2 in SpeedFax replacement tables. SMBK* strap kits fit all SE panels; only AL 250A MLO kits (MLKA1/MLKA3) available for SE. Construction details unknown.

Attribute	Value	Cl.	Sources
Status	discontinued	A	S165 p.11-15; oem_spec

Key documents: S165 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards
Also fits this family (entry printed elsewhere): MLKA1, MLKA3, SMBKED1, SMBKED3, SMBKFD1, SMBKFD3, SMBKJD1, SMBKJD3, DFFP01B, DFFPFD01, IMK1

6.13 CDP6 — Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)

FAM-SIE-010 · switchboard · aka CDP-5, CDP-6, CDP6, Class II, FC-1, FC-20, FC-I, FC-II, FC20, FCI, FCII, FCRS, SPP6, VB, VB-5, VB-6 · markings: Gould ITE, ITE, Siemens, Siemens-Allis

Legacy distribution panelboard and switchboard lines served by the Series 6 connecting strap kits (6E62, 6F62, 6JJ62, 6LL61...) and 6FPB blank plates. 2005 Siemens price list states these kits fit 'switchboards manufactured since 1974'. Equipment lineage (ITE/Gould-ITE/Siemens-Allis) for each type not confirmed in OEM documents in this batch.

Evidence record for existing CDP6 family: dealer kits 5EH2 (EE/EH/EF/HE twin), 5FJ2 (FJ3 twin) and 5JJ2 (JD3/JJ3/JL3/HJ3 twin) list panel type 'FC20 VB'; CDPFJ3, 6CLJ6 and NEB65K list 'FC1, FCII, SB1-3, CDP-5, CDP-6, S5, P5'. The 1990 NEC committee roster shows 'I-T-E Elec. Prod. Div. of Siemens-Allis Inc.'

Attribute	Value	Cl.	Sources
Status	discontinued equipment; strap kits still catalogued (Canada) (Equipment status inferred from absence in current US SpeedFax)	B	S166 p.11-15; oem_spec
Era of manufacture	Strap kits fit switchboards manufactured since 1974	A	S167 p.8-13; oem_spec
Ite breakers	ITE breaker types EE, EH, EF, HE (150 A), FJ3 (225 A), JD3/JJ3/JL3/HJ3 (400 A) used on FC20/VB	C	S444 surplus_listing

Breaker families associated: BQ / BQH / HBQ (bolt-on, legacy), ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), ITE EE / EH / EF / HE breakers, ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers, JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, QJ2 / QJH2 / QJ2-H / HQJ2H
Key documents: S165 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S166 Power Product Catalogue Section 11 Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/; S167 Discount Schedule A, page 8-13 2005 Electrical Distribution Products price list - Switchboard Replacement and Modificatio; S444 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it
Also fits this family (entry printed elsewhere): QF3, EBF1, SDGD, SBLBD, S3VA41TD, S3VA41TDHD, SGB2D, SE6D, 6CLE2, S3VA52TD, 6QR2, SFGD, SF6D, SCFD, S3VA53TD, S3VA63TD, SJG2D, SJG1D, SJ1D, SJ2D, SCJD, S3VA54TD, S3VA64TD, SLGD, SL6D, SCLD, SSL6D, SSCLD, MG1D, SLM1D, SMND, SSMND, NG1D, SSJ1D, 6E62, 6QJ2, 6F62, 6CLF1, 6JJ61, 6JJ62, 6CLJ1, 6SJL1, 6SCJ1, 6LL61, 6CLL1, 6SLL1, 6SCL1, 6FPB01, 6FPB02, 6FPB03, 6FPB05, 6FPB10, 6FPB15, SEBD, SNBD, CD62JJ2, VB610, VB6150, VB657, VB671, F6162D

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00424	**5EH2**	ITE twin mounting kit for FC20 / VB panels, EE/EH/EF/HE breakers, 150 A	EE, EH, EF, HE C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00425	**5FJ2**	ITE twin mounting kit for FC20 / VB panels, FJ3/FJ breakers, 225 A	FJ3, FJ C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00426	**5JJ2**	ITE twin mounting kit, J-frame (JD3/JJ3/JL3/HJ3), 400 A	JD3, JJ3, JL3, HJ3, JD, JJ, JL C	Discontinued OEM item traded new-surplus / recertified by de

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00201	**6BL2C**	6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)	BQ, BQH, HB, BL, BLH, HBL [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00431	**6CLJ6**	Mounting hardware to mount CJD (CLD) into FC-1 panel, single, 600 A	CLD / CJD **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00203	**6M61C**	6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)	MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00204	**6N61C**	6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)	NXD6, ND6, HND6, CND6, SHND6, SCND6 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00202	**6SCL61C**	6SCL61C connecting strap kit - SCJD6 (8.75in, single)	SCJD6 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-OTH-00054	**BEDITE**	Aftermarket bus connection kit BEDITE (seller cross-ref to SIE 6E62)	mounts two ED4 frame breakers **C**	current aftermarket item; listing label 'SIEMENS/I-T-E After
EDH-OTH-00056	**BFDITE**	Aftermarket bus connection kit BFDITE (seller cross-ref to SIE 6F62)	mounts two FD6 frame breakers **C**	current aftermarket item; listing label 'SIEMENS/I-T-E After
EDH-OTH-00067	**BFJITE**	Aftermarket bus connection kit BFJITE (seller cross-ref to SIE 5FJ2)	mounts two FJ3B frame breakers **C**	offered; condition/aftermarket status not stated on listing
EDH-OTH-00058	**BJDITE**	Aftermarket bus connection kit BJDITE (seller cross-ref to SIE 6JJ62)	mounts two JD6 frame breakers **C**	current aftermarket item; listing label 'SIEMENS/I-T-E After
EDH-OTH-00057	**BJDSGLITE**	Aftermarket bus connection kit BJDSGLITE (seller cross-ref to SIE 6JJ61)	mounts one JD6 frame breaker **C**	current aftermarket item; listing label 'SIEMENS/I-T-E After
EDH-OTH-00066	**BJLITE**	Aftermarket bus connection kit BJLITE (seller cross-ref to SIE 5JJ2)	mounts two JJ/JL3B frame breakers **C**	offered; condition/aftermarket status not stated on listing
EDH-OTH-00059	**BLDITE**	Aftermarket bus connection kit BLDITE (seller cross-ref to SIE 6LL61)	listing says mounts two LD6 frame breakers (OEM 6LL61/SL6D are single- **C**	current aftermarket item; listing label 'SIEMENS/I-T-E After
EDH-OTH-00060	**BMDITE**	Aftermarket bus connection kit BMDITE (seller cross-ref to SIE SMND)	mounts one MD6/ND6 frame breaker **C**	current aftermarket item; listing label 'SIEMENS/I-T-E After
EDH-OTH-00055	**BQJITE**	Aftermarket bus connection kit BQJITE (seller cross-ref to SIE 6QJ2)	mounts two QJ2 frame breakers **C**	current aftermarket item; listing label 'SIEMENS/I-T-E After
EDH-SIE-00430	**CDPFJ3**	Mounting hardware for FJ3 breaker in CDP panelboard (twin, 225 A)	FJ3 **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00427	**EH3K**	Twin mounting hardware kit for FC20/VB, EE/EH/EF/HE, 150 A (possibly aftermarket equivalent of 5EH2)	EE, EH, EF, HE **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00428	**FJ3K**	Twin mounting hardware kit for FC20/VB, FJ3, 225 A (possibly aftermarket equivalent of 5FJ2)	FJ3 **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00429	**JJ3K**	Twin mounting hardware kit for FC20/VB, JD3/JJ3/JL3/HJ3, 400 A (possibly aftermarket equivalent of 5JJ2)	JD3, JJ3, JL3, HJ3 **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00433	**NEB64K**	Twin mounting hardware kit for NEB/HEB breakers, 125 A (S4/P4/SPP/F1)	NEB, HEB **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00432	**NEB65K**	Twin mounting hardware kit for NEB/HEB breakers, 125 A (Series 5/6 deep panels)	NEB, HEB **C**	Discontinued OEM item traded new-surplus / recertified by de

EDH-SIE-00424	5EH2	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE twin mounting kit for FC20 / VB panels, EE/EH/EF/HE breakers, 150 A

OEM part number	5EH2	C	S444 surplus_listing
Description	Twin Mounting Kit for FC20, VB panels, mounts EE, EH, EF, HE breakers	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC20, VB	C	same as above
Breaker compatibility	EE, EH, EF, HE	C	same as above
Current rating	150 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6 · Breakers: ITE EE / EH / EF / HE breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00425	5FJ2	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE twin mounting kit for FC20 / VB panels, FJ3/FJ breakers, 225 A

OEM part number	5FJ2	C	S444 surplus_listing
Description	Twin Mounting Kit for FC20, VB panels, mounts FJ3, FJ breakers	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC20, VB	C	same as above
Breaker compatibility	FJ3, FJ	C	same as above
Current rating	225 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Aftermarket / reproduction	Breaker King offers BFJITE (kit # FJ3K) as a replacement ('Kit # FJ3K. Replaces OEM 5FJ2'), condition not stated (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Cross-links	Families: CDP6 · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00426	5JJ2	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE twin mounting kit, J-frame (JD3/JJ3/JL3/HJ3), 400 A

OEM part number	5JJ2	C	S444 surplus_listing
Description	Twin Mounting Kit for NAB, NHB panels (title) - spec block panel type 'FC20 VB'; mounts JD3, JJ3, JL3, HJ3, JD, JJ, JL	C	same as above
Application	branch (twin)	C	same as above
Installation location	Title: NAB, NHB panels; spec: FC20, VB (conflict)	C	same as above
Breaker compatibility	JD3, JJ3, JL3, HJ3, JD, JJ, JL	C	same as above
Current rating	400 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Aftermarket / reproduction	Breaker King offers BJLITE (kit # JJ3K) as a replacement ('Kit # JJ3K. Replaces OEM 5JJ2'), condition not stated (seller claim; seller cross-reference; equivalence/listing not verified)	C	S628 distributor
Cross-links	Families: CDP6, NLAB · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*Title says NAB/NHB panels but spec says FC20/VB - which ITE equipment?*		

EDH-SIE-00201	6BL2C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)

OEM part number	6BL2C	A	S166 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for BQ, BQH, HB, BL, BLH, HBL branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S166 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	BQ, BQH, HB, BL, BLH, HBL [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S166 p.11-15; oem_spec
Material	copper only (footnote e) (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S166 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S166 oem_spec
Cross-links	Families: CDP6, SB · Breakers: BQ / BQH / HBQ (bolt-on, legacy), BL		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*Distributor listings disagree on breaker list (BL/BLH/HBL/BQD/BQD6 vs BQ/BQH/HB) - Canadian OEM table lists 'BQ, BQH, HB, BL, BLH, HBL'*		

EDH-SIE-00431	6CLJ6	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Mounting hardware to mount CJD (CLD) into FC-1 panel, single, 600 A

OEM part number	6CLJ6	C	S444 surplus_listing
Description	Mounting hardware to mount CJD into FC-1 Panel	C	same as above
Application	branch (single)	C	same as above
Installation location	FC1, FCII, SB1-3, CDP-5, CDP-6, S5, P5	C	same as above
Breaker compatibility	CLD / CJD	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00203	6M61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)

OEM part number	6M61C	A	S166 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 branch breaker(s), single mount, 10in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S166 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S166 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 10 in (Unit-space height consumed on the interior, not part outline)	A	S166 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S166 oem_spec
Cross-links	Families: CDP6, SB · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00204	6N61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)

OEM part number	6N61C	A	S166 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for NXD6, ND6, HND6, CND6, SHND6, SCND6 branch breaker(s), single mount, 10in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S166 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	NXD6, ND6, HND6, CND6, SHND6, SCND6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S166 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 10 in (Unit-space height consumed on the interior, not part outline)	A	S166 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S166 oem_spec
Cross-links	Families: CDP6, SB · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00202	6SCL61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6SCL61C connecting strap kit - SCJD6 (8.75in, single)

OEM part number	6SCL61C	A	S166 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD6 branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S166 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	SCJD6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S166 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S166 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S166 oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-OTH-00054	BEDITE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BEDITE (seller cross-ref to SIE 6E62)

OEM part number	BEDITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	6E62 [equivalent] (seller cross-reference: 'Kit # ED65K replaces OEM 6E62 and SE6D')	C	same as above
	ED65K [alias] (seller/PCS kit number quoted in listing)	C	same as above
	SE6D [equivalent] (seller cross-reference: 'Kit # ED65K replaces OEM 6E62 and SE6D')	C	same as above
Description	Bus connection hardware for FCI, FCII, CDP6, S5, P5, SPP, SB1-SB3 (12-3/4 in deep enclosures); mounts two ED4 frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two ED4 frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'SIEMENS/I-T-E Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM 6E62 ('Kit # ED65K replaces OEM 6E62 and SE6D') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP6, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00056	BFDITE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BFDITE (seller cross-ref to SIE 6F62)

OEM part number	BFDITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	6F62 [equivalent] (seller cross-reference: 'Kit # FD65K replaces OEM 6F62 and SF6D')	C	same as above
	FD65K [alias] (seller/PCS kit number quoted in listing)	C	same as above
	SF6D [equivalent] (seller cross-reference: 'Kit # FD65K replaces OEM 6F62 and SF6D')	C	same as above
Description	Bus connection hardware for FCI, FCII, CDP6, S5, P5, SPP, SB1-SB3 (12-3/4 in deep); mounts two FD6 frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two FD6 frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'SIEMENS/I-T-E Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM 6F62 ('Kit # FD65K replaces OEM 6F62 and SF6D') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP6, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00067	BFJITE	Breaker King	branch-connector-kit	OFFERED; CONDITION/AFT

Aftermarket bus connection kit BFJITE (seller cross-ref to SIE 5FJ2)

OEM part number	BFJITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	5FJ2 [equivalent] (seller cross-reference: 'Kit # FJ3K. Replaces OEM 5FJ2')	C	same as above
	FJ3K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for ITE FC20 switchboards; mounts two FJ3B frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two FJ3B frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	offered; condition/aftermarket status not stated on listing (kit-numbering style matches the seller's aftermarket series) (seller claim)	D	same as above
Replacement / successor	Seller states it replaces OEM 5FJ2 ('Kit # FJ3K. Replaces OEM 5FJ2') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Is this an OEM, surplus or aftermarket-manufactured kit?*		

EDH-OTH-00058	BJDITE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BJDITE (seller cross-ref to SIE 6JJ62)

OEM part number	BJDITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	6JJ62 [equivalent] (seller cross-reference: 'Kit # JD65K replaces OEM 6JJ62 and SJ2D')	C	same as above
	JD65K [alias] (seller/PCS kit number quoted in listing)	C	same as above
	SJ2D [equivalent] (seller cross-reference: 'Kit # JD65K replaces OEM 6JJ62 and SJ2D')	C	same as above
Description	Bus connection hardware for FCI, FCII, CDP6, S5, P5, SPP, SB1-SB3 (12-3/4 in deep); mounts two JD6 frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two JD6 frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'SIEMENS/I-T-E Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM 6JJ62 ('Kit # JD65K replaces OEM 6JJ62 and SJ2D') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP6, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00057	BJDSGLITE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BJDSGLITE (seller cross-ref to SIE 6JJ61)

OEM part number	BJDSGLITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	6JJ61 [equivalent] (seller cross-reference: 'Kit # JDS65K replaces OEM 6JJ61 and SJ1D')	C	same as above
	JDS65K [alias] (seller/PCS kit number quoted in listing)	C	same as above
	SJ1D [equivalent] (seller cross-reference: 'Kit # JDS65K replaces OEM 6JJ61 and SJ1D')	C	same as above
Description	Bus connection hardware for FCI, FCII, CDP6, S5, P5, SPP, SB1-SB3 (12-3/4 in deep); mounts one JD6 frame breaker (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one JD6 frame breaker (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'SIEMENS/I-T-E Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM 6JJ61 ('Kit # JDS65K replaces OEM 6JJ61 and SJ1D') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP6, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00066	BJLITE	Breaker King	branch-connector-kit	OFFERED; CONDITION/AFT

Aftermarket bus connection kit BJLITE (seller cross-ref to SIE 5JJ2)

OEM part number	BJLITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	5JJ2 [equivalent] (seller cross-reference: 'Kit # JJ3K. Replaces OEM 5JJ2')	C	same as above
	JJ3K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for ITE FC20 switchboards; mounts two JJ/JL3B frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two JJ/JL3B frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	offered; condition/aftermarket status not stated on listing (kit-numbering style matches the seller's aftermarket series) (seller claim)	D	same as above
Replacement / successor	Seller states it replaces OEM 5JJ2 ('Kit # JJ3K. Replaces OEM 5JJ2') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Is this an OEM, surplus or aftermarket-manufactured kit?*		

EDH-OTH-00059	BLDITE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BLDITE (seller cross-ref to SIE 6LL61)

OEM part number	BLDITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	6LL61 [equivalent] (seller cross-reference: 'Kit # LD65K replaces OEM 6LL61 and SL6D')	C	same as above
	LD65K [alias] (seller/PCS kit number quoted in listing)	C	same as above
	SL6D [equivalent] (seller cross-reference: 'Kit # LD65K replaces OEM 6LL61 and SL6D')	C	same as above
Description	Bus connection hardware for FCI, FCII, CDP6, S5, P5, SPP, SB1-SB3 (12-3/4 in deep); listing says mounts two LD6 frame breakers (OEM 6LL61/SL6D are single-branch kits) (seller listing text (may be truncated))	C	same as above
Breaker compatibility	listing says mounts two LD6 frame breakers (OEM 6LL61/SL6D are single-branch kits) (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'SIEMENS/I-T-E Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM 6LL61 ('Kit # LD65K replaces OEM 6LL61 and SL6D') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP6, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00060	BMDITE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BMDITE (seller cross-ref to SIE SMND)

OEM part number	BMDITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	SMND [equivalent] (seller cross-reference: 'Replaces OEM SMND')	C	same as above
	ND65K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for FCI, FCII, CDP6, S5, P5, SPP, SB1-SB3 (12-3/4 in deep); mounts one MD6/ND6 frame breaker (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts one MD6/ND6 frame breaker (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'SIEMENS/I-T-E Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM SMND ('Replaces OEM SMND') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP6, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00055	BQJITE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BQJITE (seller cross-ref to SIE 6QJ2)

OEM part number	BQJITE (Breaker King catalog/model number)	C	S628 distributor
Alternate / superseded numbers	6QJ2 [equivalent] (seller cross-reference: 'Kit # QJ65K replaces OEM 6QJ2 and SQJD')	C	same as above
	QJ65K [alias] (seller/PCS kit number quoted in listing)	C	same as above
	SQJD [equivalent] (seller cross-reference: 'Kit # QJ65K replaces OEM 6QJ2 and SQJD')	C	same as above
Description	Bus connection hardware for FCI, FCII, CDP6, S5, P5, SPP, SB1-SB3 (12-3/4 in deep); mounts two QJ2 frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two QJ2 frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'SIEMENS/I-T-E Aftermarket Repl' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM 6QJ2 ('Kit # QJ65K replaces OEM 6QJ2 and SQJD') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP6, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-SIE-00430	CDPFJ3	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Mounting hardware for FJ3 breaker in CDP panelboard (twin, 225 A)

OEM part number	CDPFJ3	C	S444 surplus_listing
Description	Mounting hardware for FJ3 breaker in CDP pnlbd	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC1, FCII, SB1, SB2, SB3, CDP-5, CDP-6, S5, P5	C	same as above
Breaker compatibility	FJ3	C	same as above
Current rating	225 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6 · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00427	EH3K	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Twin mounting hardware kit for FC20/VB, EE/EH/EF/HE, 150 A (possibly aftermarket equivalent of 5EH2)

OEM part number	EH3K	C	S444 surplus_listing
Description	Siemens; Twin Mounting Hardware Kit; 150A Max	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC20, VB	C	same as above
Breaker compatibility	EE, EH, EF, HE	C	same as above
Current rating	150 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6 · Breakers: ITE EE / EH / EF / HE breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*OEM or aftermarket (IEM-style 'K' suffix)?*		

EDH-SIE-00428	FJ3K	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Twin mounting hardware kit for FC20/VB, FJ3, 225 A (possibly aftermarket equivalent of 5FJ2)

OEM part number	FJ3K	C	S444 surplus_listing
Description	Siemens; Twin Mounting Hardware Kit; 225A Max	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC20, VB	C	same as above
Breaker compatibility	FJ3	C	same as above
Current rating	225 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6 · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*OEM or aftermarket?*		

EDH-SIE-00429	JJ3K	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Twin mounting hardware kit for FC20/VB, JD3/JJ3/JL3/HJ3, 400 A (possibly aftermarket equivalent of 5JJ2)

OEM part number	JJ3K	C	S444 surplus_listing
Description	Siemens; Twin Mounting Hardware Kit; 400A Max	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC20, VB	C	same as above
Breaker compatibility	JD3, JJ3, JL3, HJ3	C	same as above
Current rating	400 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6 · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*OEM or aftermarket?*		

EDH-SIE-00433	NEB64K	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Twin mounting hardware kit for NEB/HEB breakers, 125 A (S4/P4/SPP/F1)

OEM part number	NEB64K	C	S444 surplus_listing
Description	Siemens; Twin Mounting Hardware Kit; 125A Max	C	same as above
Application	branch (twin)	C	same as above
Installation location	S4, P4, SPP, F1	C	same as above
Breaker compatibility	NEB, HEB	C	same as above
Current rating	125 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00432	NEB65K	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Twin mounting hardware kit for NEB/HEB breakers, 125 A (Series 5/6 deep panels)

OEM part number	NEB65K	C	S444 surplus_listing
Description	Siemens; Twin Mounting Hardware Kit; 125A Max	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC1, FCII, CDP-5, CDP-6, SB1-3, S5, P5, SPP/FPP	C	same as above
Breaker compatibility	NEB, HEB	C	same as above
Current rating	125 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00354	**11-5570-01**	Series 5 adaptor kit (adapts Series 6 mounting kits to Series 5 / CDP-5 / VB-5 / FC20 bus with 0.406 in holes)	—	unknown
EDH-SIE-00355	**11-5570-02**	Series 5 adaptor kit (12 sets) for JD twin mounting kits	—	unknown

EDH-SIE-00354 **11-5570-01** Siemens lineage conversion-kit **STATUS UNKNOWN**

Series 5 adaptor kit (adapts Series 6 mounting kits to Series 5 / CDP-5 / VB-5 / FC20 bus with 0.406 in holes)

OEM part number	11-5570-01	**A**	S286, S473 BOM 11-5570-01 Rev 3 (image); oem_spec
Description	Series 5 adaptor kit: adapts Series 6 mounting kits for use in Series 5 type panel construction (.406 dia bus holes)	**A**	S473 p.2 (drawing 11-5570-01 Rev 3); oem_spec
Application	For use in adapting Series 6 mounting kits to Series 5 type panel construction (Series 5 construction has 0.406 in dia holes in interior horizontal bus)	**A**	S286 BOM 11-5570-01 Rev 3 (image); oem_spec
	accessory - furnished in 6CLE2, VB6150, VB657, VB671 kits	**A**	S473 p.2 (drawing 11-5570-01 Rev 3); oem_spec
Kit contents	5/16 insert 11-1620-04 x6; 5/16 flat washer 11-1615-06 x6; 5/16 lock washer 11-1618-04 x6; 5/16-18 x 1-1/4 HHMS 11-1566-07 x6; fast latch screw bag 11-A-1821-01 x1; ID card 31-1160-01	**A**	S286 BOM 11-5570-01 Rev 3 (image); oem_spec
	Series 5 adaptor kit 11-5570-01 Rev 3: 6x 5/16 insert 11-1620-04, 6x 5/16 flat washer 11-1615-06, 6x 5/16 lock washer 11-1618-06 (-04 on some sheets), 6x 5/16-18x1-1/4 HHMS 11-1566-07, 1 fast latch screw bag 11-A-1821-01, 1 ID card 31-1160-01	**A**	S473 p.2 (drawing 11-5570-01 Rev 3); oem_spec
Mounting-hole pattern	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes	**A**	same as above
Torque values	5/16-18 HHMS 13 ft-lb	**A**	S286 BOM 11-5570-01 Rev 3 (image); oem_spec
	5/16-18x1-1/4 HHMS: 13 ft-lb	**A**	S473 p.2 (drawing 11-5570-01 Rev 3); oem_spec
OEM instruction document	(1) Use 5/16-18 insert in bus, flange pulled up flush with back of bus bar; (2) drill out appropriate holes in branch bus minimum 0.344 in dia to accommodate 5/16-18 bolts	**A**	S286 BOM 11-5570-01 Rev 3 (image); oem_spec
Cross-links	Families: CDP6		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00355	11-5570-02	Siemens lineage	conversion-kit	STATUS UNKNOWN

Series 5 adaptor kit (12 sets) for JD twin mounting kits

OEM part number	11-5570-02	**A**	S287, S474 BOM 11-5570-02 Rev 3 (image); oem_spec
Description	Series 5 adaptor kit (12 inserts/bolts) adapting Series 6 mounting kits to Series 5 panels (.406 dia bus holes)	**A**	S474 p.2 (drawing 11-5570-02 Rev 3); oem_spec
Application	Adapting Series 6 mounting kits to Series 5 construction (0.406 in dia holes in interior horizontal bus); drill branch bus to min 0.344 in for 5/16-18 bolts	**A**	S287 BOM 11-5570-02 Rev 3 (image); oem_spec
	accessory - furnished in 6CLF1, 6CLJ1, 6CLL1, 6SCJ1, 6SCL1, 6JJ62 kits	**A**	S474 p.2 (drawing 11-5570-02 Rev 3); oem_spec
Kit contents	5/16 insert 11-1620-04 x12; 5/16 flat washer 11-1615-06 x12; 5/16 lock washer 11-1618-04 x12; 5/16-18 x 1-1/4 HHMS 11-1566-07 x12; fast latch screw bag 11-A-1821-01; ID card 31-1160-02	**A**	S287 BOM 11-5570-02 Rev 3 (image); oem_spec
	Series 5 adaptor kit 11-5570-02 Rev 3: 12x 5/16 insert 11-1620-04, 12x 5/16 flat washer 11-1615-06, 12x 5/16 lock washer 11-1618-04, 12x 5/16-18x1-1/4 HHMS 11-1566-07, 1 fast latch screw bag 11-A-1821-01, 1 ID card 31-1160-02	**A**	S474 p.2 (drawing 11-5570-02 Rev 3); oem_spec
Mounting-hole pattern	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes	**A**	same as above
Torque values	5/16-18 HHMS 13 ft-lb	**A**	S287 BOM 11-5570-02 Rev 3 (image); oem_spec
	5/16-18x1-1/4 HHMS: 13 ft-lb	**A**	S474 p.2 (drawing 11-5570-02 Rev 3); oem_spec
OEM instruction document	Siemens instruction sheet 31-1169-01 Rev. 3: CAT. NO. 6JJ62 instruction sheet with drawing 12-5721 Rev 11 'JD Frame Twin Mounting Series 6 Branch' (-01 = 6JJ62, -02 = SJ2D) and Series 5 adaptor kit 11-5570-02	**A**	S287 BOM 11-5570-02 Rev 3 (image); oem_spec
Cross-links	Families: CDP6		
Not yet documented	Dimensions, Material, Status		

6.14 SB — Type SB1 / SB2 / SB3 distribution switchboards

FAM-SIE-009 · switchboard · aka SB1, SB2, SB3, SB4 (blank plates only) · markings: Siemens

Siemens front-accessible distribution switchboards. Branch MCCBs mount in distribution sections via 'Connection Strap Kits' (same D-suffix kits as P5: SBLBD, SE6D, SF6D, SJ1D, SMND etc. plus S3VA*TD kits), unit space covered with 6FPB blank plates.

Attribute	Value	Cl.	Sources
Status	current	**A**	S166 p.11-2; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQ / BQH / HBQ (bolt-on, legacy), BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, QR2 / QRH2 / HQR2 / HQR2H

Key documents: S165 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S166 Power Product Catalogue Section 11 Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/; S167 Discount Schedule A, page 8-13 2005 Electrical Distribution Products price list - Switchboard Replacement and Modificatio

Also fits this family (entry printed elsewhere): DFFP1A, QF3, EBF1, SBL, S3VA41T, SGB2, S3VA52T, SDGD, SQR, SFG, S3VA53T, SJG, S3VA54T, SLG, MG1, SBLBD, S3VA41TD, S3VA41TDHD, SGB2D, SE6D, 6CLE2, S3VA52TD, 6QR2, SFGD, SF6D, SCFD, S3VA53TD, S3VA63TD, SJG2D, SJG1D, SJ1D, SJ2D, SCJD, S3VA54TD, S3VA64TD, SLGD, SL6D, SCLD, SSL6D, SSCLD, MG1D, SLM1D, SMND, SSMND, NG1D, SCED, SQRD, S3VA53T2D, SSJ1D, SSCJD, S3VA54T2D, S3VA55TD, S3VA57TD, 6E62, 6QJ2, 6F62, 6JJ61, 6JJ62, 6SJL1, 6LL61, 6SLL1, 6BL2C, 6SCL61C, 6M61C, 6N61C, S3VA52PR, SQRC, 6FPB01, 6FPB02, 6FPB03, 6FPB05, 6FPB10, SEB, SEBD, SNBD, F6162D, SQJD

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00191	**6CLF1**	6CLF1 connecting strap kit - CFD6 (5in, single)	CFD6 [s3]; CFD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00194	**6CLJ1**	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	CJD6 [s3]; CJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00198	**6CLL1**	6CLL1 connecting strap kit - CLD6 (8.75in, single)	CLD6 [s3]; CLD6, SCLD [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00196	**6SCJ1**	6SCJ1 connecting strap kit - SCJD6 (8.75in, single)	SCJD6 [s3] **A**	listed in 2005 price list
EDH-SIE-00200	**6SCL1**	6SCL1 connecting strap kit - SCLD6 (8.75in, single)	SCLD6 [s3] **A**	listed in 2005 price list

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00350	**SDG**	SB1/SB2/SB3 & P4/P5 branch mounting kit for Sentron VL DG frame breakers (shallow)	Siemens VL DG frame electronic-trip breakers **A**	unknown
EDH-SIE-00351	**SLM1**	Switchboard/power panel branch kit SLM1 for Sentron LMD / VL MG frame breakers	Sentron LMD and VL MG frame breakers **A**	unknown
EDH-SIE-00352	**SNB**	Switchboard/P4/P5 branch kit for GB breakers (shallow)	Type GB (NGB, HGB, LGB); 3-ph 3/4-w **A**	unknown
EDH-SIE-00442	**VB610**	ITE Vacu-Break mounting hardware straps	Vacu-Break fusible switch **C**	Discontinued OEM item traded new-surplus / recertified by de

EDH-SIE-00191	**6CLF1**	Siemens	branch-connector-kit	**LISTED IN 2005 PRICE L**

6CLF1 connecting strap kit - CFD6 (5in, single)

OEM part number	6CLF1	**A**	S167, S330, S474, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLF1C	**A**	S166 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CFD6 branch breaker(s), single (s) mount, 5in unit height	**A**	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
	Single-mount strap kit for ITE type CLF and CFD6 frame branch breakers 70-250 A on Series 5/6 copper bus (merchandise kit no. 6CLF1)	**A**	S474 p.1 (drawing 11-5383-00, BOM 11-5383-03); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	**A**	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	branch	**A**	S474 p.1 (drawing 11-5383-00, BOM 11-5383-03); oem_spec
	branch, single mounting	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Series 5 or 6 distribution sections: CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3. Existing CDP-5/VB-5/FC20 vertical bus pre-punched 0.406 in dia holes -> use Series 5 adaptor kit furnished; CDP-6/VB-6/FCI/FCII vertical bus pre-punched 0.228 in dia holes -> Series 6 branch bus parts list	**A**	S330 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Series 5 or 6 distribution sections, CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3	**A**	S474 p.1 (drawing 11-5383-00, BOM 11-5383-03); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	CFD6 [s3]; CFD6 [s2]	**A**	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	CFD6 frame branch breaker single mounted 70-250 A; I-T-E type CLF, CFD6	**A**	S330 single sheet drawing + BOM (scanned image, read visually); oem_spec
	ITE CLF, CFD6 (70-250 A)	**A**	S474 p.1 (drawing 11-5383-00, BOM 11-5383-03); oem_spec

	Sentron CFD (max 250 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	250 A max	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S167, S166 p.8-13 | p.11-15; oem_spec
	BOM 11-5383-03: breaker support bracket 15-B-3020-02; phase A/B/C connector bus 12-7144-01 / 12-7145-01 / 12-7146-01; phase A/B/C branch bus 12-7143-01 / -02 / -03; bus support bracket 12-6257-01; stand-off insulator 11-1800-01 x3; branch bus barrier 11-7715-01; 5 in front plate 12-6029-02; circuit ID card; card holder; 1/4-20 x 3/8 SHWHSW x9; strap-bus hardware kit 11-B-2022-05 x2 (+2 item 26); 1/4-20 x 1-7/16 SHWHSW 11-1553-13 x3; 1/4-20 x 4 SRHMS 11-1542-19 x2; neutral lug assembly 12-B-2105-03; blank filler 12-5531-10; 10-24 x 5/8 RHSNB 11-1630-02 x2; 10-24 lock nut 11-1821-02 x2; Series 5 conversion kit 11-5570-02; instruction sheet 31-1154-01	A	S330 single sheet drawing + BOM (scanned image, read visually); oem_spec
	BOM 11-5383-03: 1 breaker support bracket 15-B-3020-02; phase A/B/C connector bus 12-7144-01/12-7145-01/12-7146-01; phase A/B/C branch bus 12-7143-01/-02/-03; 1 bus support bracket 12-6257-01; 3 stand-off insulator 11-1800-01; 1 branch bus barrier 11-7715-01; 1 5in front plate 12-6029-02; circuit ID card 11-7505-01; card holder 11-7506-01; 9 1/4-20x3/8 SHWHSW 11-1553-02; 2+2 strap-bus hardware kit 11-B-2022-05; 3 1/4-20x1-7/16 SHWHSW 11-1553-13; 2 1/4-20x4 SRHMS 11-1542-19; 1 neutral lug assembly 12-B-2105-03; 1 blank filler 12-5531-10; 2 10-24x5/8 RHSNB 11-1630-02; 2 10-24 lock nut 11-1821-02; 1 Series 5 conversion kit 11-5570-02; instruction 31-1154-01; carton label 15-A-1027-01; carton 48001056	A	S474 p.1 (drawing 11-5383-00, BOM 11-5383-03); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper only; Canadian catalogue lists as 6CLF1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S166 p.11-15; oem_spec
	Copper branch bus	A	S330 single sheet drawing + BOM (scanned image, read visually); oem_spec
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S167, S166, S589 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	5.000 in unit; 1.000/1.500/1.250/1.750 in; 0.625 in	A	S330 single sheet drawing + BOM (scanned image, read visually); oem_spec
	5.000in unit; connector pitch 1.000/1.500/1.500/1.000; offsets .625; 1.250/1.750/1.500/1.750	A	S474 p.1 (drawing 11-5383-00, BOM 11-5383-03); oem_spec
Mounting-hole pattern	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes	A	same as above
Torque values	Items 16/17: 50 in-lb Al / 72 in-lb Cu; Series 5 adaptor 13 ft-lb	A	S330 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Item 16: 50 in-lb AL; items 16 & 17: 72 in-lb CU; Series 5 adaptor bolts 13 ft-lb	A	S474 p.1 (drawing 11-5383-00, BOM 11-5383-03); oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1154-01 Rev. 00: SEBKP2V4 / SEBKP3V1 Service Entrance Barrier Kits (vertical mains) for P2 / P3	A	S330 single sheet drawing + BOM (scanned image, read visually); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S167, S166 oem_spec
Identification features	2005 list price $1553.00	A	S167 p.8-13; oem_spec
Cross-links	Families: SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Finish / plating		

EDH-SIE-00194 **6CLJ1** Siemens branch-connector-kit **LISTED IN 2005 PRICE L**

6CLJ1 connecting strap kit - CJD6 (8.75in, single)

OEM part number	6CLJ1	**A**	S167, S377, S475, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLJ1C	**A**	S166 alias; p.11-15; oem_spec
	12-5719-01 (Assembly -02 of the same drawing = strap kit SCJD (instruction 31-1225-01))	**A**	S475 alias; drawing; oem_spec
Description	Connecting strap kit (breaker not included) for CJD6 branch breaker(s), single (s) mount, 8.75in unit height	**A**	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
	Series 6 branch mounting kit (drawing 12-5719 pc. -01) for ITE CLJ, CJD6 breakers (400 A breaker shown), with Series 5 conversion kit	**A**	S475 p.1 (drawing 12-5719, -01 assembly); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	**A**	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	branch	**A**	S475 p.1 (drawing 12-5719, -01 assembly); oem_spec
	branch, single mounting	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Series 5/6 distribution sections (CDP-5/6, VB-5/6, FCI, FCII, SB1-3) - PC -01 assembly of drawing used on strap kit 6CLJ1	**A**	S377 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Series 5 or 6 distribution sections, CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3	**A**	S475 p.1 (drawing 12-5719, -01 assembly); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	CJD6 [s3]; CJD6 [s2]	**A**	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	ITE breaker types CLJ, CJD6, 400 A breaker	**A**	S377 single sheet drawing + BOM (scanned image, read visually); oem_spec
	ITE CLJ, CJD6	**A**	S475 p.1 (drawing 12-5719, -01 assembly); oem_spec
	Sentron CJD (max 400 A)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	400 A max	**A**	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S167, S166 p.8-13 | p.11-15; oem_spec
	Drawing BOM: mounting bracket 16-6114-01; support bracket 16-6120-02; phase AC jitney 17-6768-02 x2; phase B jitney 17-6769-02; AC long connector 12-6776-05; B connector 12-6776-06; AC short connector 12-6776-04; pad connector 17-6770-02 x3; 1-1/4 in insulator 11-1800-02 x4; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6194-02; circuit ID card 11-7505-01; card holder 11-7506-01; strap-bus hardware kit 11-B-2022-05 x2; 5/12-18 (sic) insert 11-1620-04, 5/16 flat washers 11-1615-06, 5/16 lock washers 11-1618-04 (x12 for -01 Series 5 conversion); 5/16-18 x 1 HHMS 11-1566-05 x6; 5/16-16 x 1-1/4 HHMS 11-1566-07 x6; 1/4 flat/lock washers; 1/4-20 x 1/2 and 7/8 HHMS; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; neutral lug assemblies 12-B-2105-04 / 12-B-2105-06; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; filler plate assembly 12-5531-11; auxiliary mounting bracket 16-6115-01; Series 5 conversion kit 11-5570-02 (-01 only). Column quantities per -01/-02 read from scan - verify	**A**	S377 single sheet drawing + BOM (scanned image, read visually); oem_spec

	Drawing -01 assembly: 1 mounting bracket 16-6114-01; 1 support bracket 16-6120-02; 2 phAC jitney 17-6768-02; 1 phB jitney 17-6769-02; 1 phAC long connector 12-6776-06; 1 phB connector 12-6776-05; 1 phAC short connector 12-6776-04; 3 pad connector 17-6770-02; 4 1-1/4in insulator 11-1800-02; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6194-02; circuit ID card 11-7505-01; card holder 11-7506-01; 2 strap-bus hardware kit 11-B-2022-05; 12 5/16-18 insert 11-1620-04; 12 5/16 flat washer 11-1615-06; 12 5/16 lock washer 11-1618-04; 6 5/16-18x1 HHMS 11-1566-05; 6 5/16-18x1-1/4 HHMS 11-1566-07; 6 1/4 flat washer 11-1615-04; 8 1/4 lock washer 11-1618-03; 4 1/4-20x1/2 HHMS 11-1546-02; 4 1/4-20x7/8 HHMS 11-1546-05; 4 1/4-20x2-3/4 SRHMS 11-1542-14; 6 1/4-20x3/8 SHWHSW 11-1553-02; 1 filler plate assembly 12-5531-11; 1 auxiliary mounting bracket 16-6115-01; neutral lug assembly 12-B-2105-04; Series 5 conversion kit 11-5570-02; instruction sheet 31-1187-01; carton label 15-A-1027-01; carton 48001057	A	S475 p.1 (drawing 12-5719, -01 assembly); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper only; Canadian catalogue lists as 6CLJ1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S166 p.11-15; oem_spec
	Copper branch bus	A	S377 single sheet drawing + BOM (scanned image, read visually); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S167, S166, S589 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Branch layout 8.75 / 6.88 / 4.38 / 1.88 / 0.00 in; 5.63 / 3.75 / 3.13 / 1.25 in	A	S377 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Connector heights 0.00, 1.88, 4.38, 6.88, 8.75in (8.75in unit); bracket holes 1.25, 3.13, 3.75, 5.63in	A	S475 p.1 (drawing 12-5719, -01 assembly); oem_spec
Mounting-hole pattern	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes	A	same as above
Torque values	Strap-bus hardware (item 16) 72 in-lb; item 29 20 ft-lb; items 20/21 (5/16 HHMS) 12 ft-lb	A	S377 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Strap-bus hardware (item 16) 72 in-lb; item 29 (3/8-16 RHSNB) 20 ft-lb; items 20/21 (5/16-18 HHMS) 12 ft-lb; Series 5 adaptor 13 ft-lb	A	S475 p.1 (drawing 12-5719, -01 assembly); oem_spec
OEM instruction document	Siemens instruction sheet 31-1225-01 Rev. 1: CAT. NO. SCJD - drawing 12-5719 Rev 10 'CJD frame mount Series 6 - branch'	A	S377 single sheet drawing + BOM (scanned image, read visually); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S167, S166 oem_spec
Identification features	2005 list price $2122.00	A	S167 p.8-13; oem_spec
Cross-links	Families: SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Finish / plating		

EDH-SIE-00198	6CLL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLL1 connecting strap kit - CLD6 (8.75in, single)

OEM part number	6CLL1	A	S167, S379, S476, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLL1C	A	S166 alias; p.11-15; oem_spec
	12-5720-01 (Assembly -02 of the same drawing = strap kit SCLD (instruction 31-1229-01))	A	S476 alias; drawing; oem_spec

Description	Connecting strap kit (breaker not included) for CLD6 branch breaker(s), single (s) mount, 8.75in unit height	**A**	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
	Series 6 branch mounting kit (drawing 12-5720 pc. -01) for ITE CLL, CLD6 breakers (600 A breaker shown), with Series 5 conversion kit	**A**	S476 p.1 (drawing 12-5720, -01 assembly); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	**A**	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	branch	**A**	S476 p.1 (drawing 12-5720, -01 assembly); oem_spec
	branch, single mounting	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Series 5/6 distribution sections (CDP-5/6, VB-5/6, FCI, FCII, SB1-3); PC -01 assembly of drawing 12-5720 used on strap kit 6CLL1	**A**	S379 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Series 5 or 6 distribution sections, CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3	**A**	S476 p.1 (drawing 12-5720, -01 assembly); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	CLD6 [s3]; CLD6, SCLD [s2]	**A**	S167, S166 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	ITE breaker types CLL, CLD6, 600 A breaker	**A**	S379 single sheet drawing + BOM (scanned image, read visually); oem_spec
	ITE CLL, CLD6	**A**	S476 p.1 (drawing 12-5720, -01 assembly); oem_spec
	Sentron CLD (max 600 A)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	600 A max	**A**	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S167, S166 p.8-13 | p.11-15; oem_spec
	Drawing BOM (same structure as 12-5719/12-5772): mounting bracket 16-6114-01; support bracket 16-6120-02; AC jitney 17-6768-02 x2; B jitney 17-6769-02; AC long connector 12-6776-06; B connector 12-6776-05; AC short connector 12-6776-04; pad connector 17-6770-02 x3; 1-1/4 in insulators 11-1800-02 x4; barriers 11-7721-01, 11-6415-02; cover plate 12-6194-02; strap-bus hardware kit 11-B-2022-05 x2; 5/16-18 inserts, flat and lock washers; 5/16-18 x 1 and x 1-1/4 HHMS; 1/4-20 x 1/2 and 7/8 HHMS; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; neutral lug assemblies 12-B-2105-04 / -06; 3/8-16 x 1 RHSNB 11-1580-02; 3/8-16 Belleville washer nut 11-1622-01; 1/4-20 x 3/8 SHWHSW 11-1553-02; filler plate assembly 12-5531-11; auxiliary mounting bracket 16-6115-01; Series 5 conversion kit 11-5570-02 (-01). Column quantities read from scan - verify	**A**	S379 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Drawing -01 assembly: 1 mounting bracket 16-6114-01; 1 support bracket 16-6120-02; 2 phAC jitney 17-6768-02; 1 phB jitney 17-6769-02; 1 phAC long connector 12-6776-06; 1 phB connector 12-6776-05; 1 phAC short connector 12-6776-04; 3 pad connector 17-6770-02; 4 1-1/4in insulator 11-1800-02; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6194-02; circuit ID card 11-7505-01; card holder 11-7506-01; 2 strap-bus hardware kit 11-B-2022-05; 12 5/16-18 insert 11-1620-04; 12 5/16 flat washer 11-1615-06; 12 5/16 lock washer 11-1618-04; 6 5/16-18x1 HHMS 11-1566-05; 6 5/16-18x1-1/4 HHMS 11-1566-07; 6 1/4 flat washer 11-1615-04; 8 1/4 lock washer 11-1618-03; 4 1/4-20x1/2 HHMS 11-1546-02; 4 1/4-20x7/8 HHMS 11-1546-05; 4 1/4-20x2-3/4 SRHMS 11-1542-14; 6 1/4-20x3/8 SHWHSW 11-1553-02; 1 filler plate assembly 12-5531-11; 1 auxiliary mounting bracket 16-6115-01; neutral lug assembly 12-B-2105-04; Series 5 conversion kit 11-5570-02; instruction sheet 31-1189-01; carton label 15-A-1027-01; carton 48001057 ; 3/8-16x1 RHSNB 11-1580-02 and 3/8-16 belleville washer nut 11-1622-01 listed (qty '-')	**A**	S476 p.1 (drawing 12-5720, -01 assembly); oem_spec

	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper only; Canadian catalogue lists as 6CLL1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S166 p.11-15; oem_spec
	Copper branch bus	A	S379 single sheet drawing + BOM (scanned image, read visually); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S167, S166, S589 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Branch layout 8.75 / 6.88 / 4.38 / 1.88 in; 5.63 / 3.75 / 3.13 / 1.25 in	A	S379 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Connector heights 0.00, 1.88, 4.38, 6.88, 8.75in (8.75in unit); bracket holes 1.25, 3.13, 3.75, 5.63in	A	S476 p.1 (drawing 12-5720, -01 assembly); oem_spec
Mounting-hole pattern	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes	A	same as above
Torque values	Item 16 (strap-bus hardware) 72 in-lb; item 29 20 ft-lb; items 20/21 12 ft-lb	A	S379 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Strap-bus hardware (item 16) 72 in-lb; item 29 (3/8-16 RHSNB) 20 ft-lb; items 20/21 (5/16-18 HHMS) 12 ft-lb; Series 5 adaptor 13 ft-lb	A	S476 p.1 (drawing 12-5720, -01 assembly); oem_spec
OEM instruction document	Siemens instruction sheet 31-1229-01 Rev. 2: CAT. NO. SCLD - drawing 12-5720 Rev 11 'CLD frame mount Series 6 - branch' (-01 = 6CLL1, -02 = SCLD)	A	S379 single sheet drawing + BOM (scanned image, read visually); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S167, S166 oem_spec
Identification features	2005 list price $2525.00	A	S167 p.8-13; oem_spec
Cross-links	Families: SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Finish / plating		

EDH-SIE-00196 **6SCJ1** Siemens branch-connector-kit **LISTED IN 2005 PRICE L**

6SCJ1 connecting strap kit - SCJD6 (8.75in, single)

OEM part number	6SCJ1	A	S167, S477, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	12-5771-01 (Assembly -02 of the same drawing = strap kit SSCJD (instruction 31-1226-01))	A	S477 alias; drawing; oem_spec
Description	Connecting strap kit (breaker not included) for SCJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
	Series 6 branch mounting kit (drawing 12-5771 pc. -01) for ITE SCJD6 breakers (400 A breaker shown), with Series 5 conversion kit	A	S477 p.1 (drawing 12-5771, -01 assembly); oem_spec
Application	branch (unit-space mounted); mounting: Single (S)	A	S167 p.8-13 (2005) (s3); oem_spec
	branch	A	S477 p.1 (drawing 12-5771, -01 assembly); oem_spec

	branch, single mounting	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Series 5 or 6 distribution sections, CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3	A	S477 p.1 (drawing 12-5771, -01 assembly); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	SCJD6 [s3]	A	S167 p.8-13 (2005) (s3); oem_spec
	ITE SCJD6	A	S477 p.1 (drawing 12-5771, -01 assembly); oem_spec
	Sentron SCJD (max 400 A)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	400 A max	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S167 p.8-13; oem_spec
	Drawing -01 assembly: 1 mounting bracket 16-6114-01; 1 support bracket 16-6120-02; 2 phAC jitney 17-6768-02; 1 phB jitney 17-6769-02; 1 phAC long connector 12-6776-06; 1 phB connector 12-6776-05; 1 phAC short connector 12-6776-04; 3 pad connector 17-6770-02; 4 1-1/4in insulator 11-1800-02; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6487-01; circuit ID card 11-7505-01; card holder 11-7506-01; 2 strap-bus hardware kit 11-B-2022-05; 12 5/16-18 insert 11-1620-04; 12 5/16 flat washer 11-1615-06; 12 5/16 lock washer 11-1618-04; 6 5/16-18x1 HHMS 11-1566-05; 6 5/16-18x1-1/4 HHMS 11-1566-07; 6 1/4 flat washer 11-1615-04; 8 1/4 lock washer 11-1618-03; 4 1/4-20x1/2 HHMS 11-1546-02; 4 1/4-20x7/8 HHMS 11-1546-05; 4 1/4-20x2-3/4 SRHMS 11-1542-14; 6 1/4-20x3/8 SHWHSW 11-1553-02; 1 filler plate assembly 12-5531-11; 1 auxiliary mounting bracket 16-6115-01; neutral lug assembly 12-B-2105-04; Series 5 conversion kit 11-5570-02; instruction sheet 31-1194-01; carton label 15-A-1027-01; carton 48001057 ; 3/8-16x1 RHSNB 11-1580-02 and 3/8-16 belleville washer nut 11-1622-01 listed (qty '-')	A	S477 p.1 (drawing 12-5771, -01 assembly); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper straps	A	S167 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S167, S589 p.8-13 (2005) (s3); oem_spec
	Connector heights 0.00, 1.88, 4.38, 6.88, 8.75in (8.75in unit); bracket holes 1.25, 3.13, 3.75, 5.63in	A	S477 p.1 (drawing 12-5771, -01 assembly); oem_spec
Mounting-hole pattern	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes	A	same as above
Torque values	Strap-bus hardware (item 16) 72 in-lb; item 29 (3/8-16 RHSNB) 20 ft-lb; items 20/21 (5/16-18 HHMS) 12 ft-lb; Series 5 adaptor 13 ft-lb	A	same as above
Status	listed in 2005 price list	A	S167 oem_spec
Identification features	2005 list price $2122.00	A	S167 p.8-13; oem_spec
Cross-links	Families: SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Finish / plating, OEM instruction document		

EDH-SIE-00200	**6SCL1**	Siemens	branch-connector-kit	**LISTED IN 2005 PRICE L**

6SCL1 connecting strap kit - SCLD6 (8.75in, single)

OEM part number	6SCL1	**A**	S167, S378, S478, S589 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	12-5772-01 (Assembly -02 of the same drawing = strap kit SSCLD (instruction 31-1230-01))	**A**	S478 alias; drawing; oem_spec
Description	Connecting strap kit (breaker not included) for SCLD6 branch breaker(s), single (s) mount, 8.75in unit height	**A**	S167 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
	Series 6 branch mounting kit (drawing 12-5772 pc. -01) for ITE SCLD6 breakers (600 A breaker shown), with Series 5 conversion kit	**A**	S478 p.1 (drawing 12-5772, -01 assembly); oem_spec
Application	branch (unit-space mounted); mounting: Single (S)	**A**	S167 p.8-13 (2005) (s3); oem_spec
	branch	**A**	S478 p.1 (drawing 12-5772, -01 assembly); oem_spec
	branch, single mounting	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Installation location	Series 5/6 distribution sections (CDP-5/6, VB-5/6, FCI, FCII, SB1-3) - PC -01 assembly of drawing used on strap kit 6SCL1	**A**	S378 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Series 5 or 6 distribution sections, CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3	**A**	S478 p.1 (drawing 12-5772, -01 assembly); oem_spec
	SB1, SB2, SB3, FC20, FCI, FCII, CDP-6 & VB-6 switchboards or Series 5 or 6 CDP circuit breaker panelboards (switchboards manufactured since 1974; RCIII switchboards: contact sales office)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	SCLD6 [s3]	**A**	S167 p.8-13 (2005) (s3); oem_spec
	ITE breaker types SCLD6, 600 A breaker	**A**	S378 single sheet drawing + BOM (scanned image, read visually); oem_spec
	ITE SCLD6	**A**	S478 p.1 (drawing 12-5772, -01 assembly); oem_spec
	Sentron SCLD (max 600 A)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Current rating	600 A max	**A**	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	**A**	S167 p.8-13; oem_spec
	Drawing BOM: mounting bracket 16-6114-01; support bracket 16-6120-02; phase AC jitney 17-6768-02 x2; phase B jitney 17-6769-02; AC long connector 12-6776-05; B connector 12-6776-06; AC short connector 12-6776-04; pad connector 17-6770-02 x3; 1-1/4 in insulator 11-1800-02 x4; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6487-01; circuit ID card 11-7505-01; card holder 11-7506-01; strap-bus hardware kit 11-B-2022-05 x2; 5/12-18 (sic) insert 11-1620-04, 5/16 flat washers 11-1615-06, 5/16 lock washers 11-1618-04 (x12 for -01 Series 5 conversion); 5/16-18 x 1 HHMS 11-1566-05 x6; 5/16-16 x 1-1/4 HHMS 11-1566-07 x6; 1/4 flat/lock washers; 1/4-20 x 1/2 and 7/8 HHMS; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; neutral lug assemblies 12-B-2105-04 / 12-B-2105-06; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; filler plate assembly 12-5531-11; auxiliary mounting bracket 16-6115-01; Series 5 conversion kit 11-5570-02 (-01 only); 3/8-16 x 1 RHSNB 11-1580-02 and 3/8-16 Belleville washer nut 11-1622-01. Column quantities per -01/-02 read from scan - verify	**A**	S378 single sheet drawing + BOM (scanned image, read visually); oem_spec

	Drawing -01 assembly: 1 mounting bracket 16-6114-01; 1 support bracket 16-6120-02; 2 phAC jitney 17-6768-02; 1 phB jitney 17-6769-02; 1 phAC long connector 12-6776-06; 1 phB connector 12-6776-05; 1 phAC short connector 12-6776-04; 3 pad connector 17-6770-02; 4 1-1/4in insulator 11-1800-02; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6487-01; circuit ID card 11-7505-01; card holder 11-7506-01; 2 strap-bus hardware kit 11-B-2022-05; 12 5/16-18 insert 11-1620-04; 12 5/16 flat washer 11-1615-06; 12 5/16 lock washer 11-1618-04; 6 5/16-18x1 HHMS 11-1566-05; 6 5/16-18x1-1/4 HHMS 11-1566-07; 6 1/4 flat washer 11-1615-04; 8 1/4 lock washer 11-1618-03; 4 1/4-20x1/2 HHMS 11-1546-02; 4 1/4-20x7/8 HHMS 11-1546-05; 4 1/4-20x2-3/4 SRHMS 11-1542-14; 6 1/4-20x3/8 SHWHSW 11-1553-02; 1 filler plate assembly 12-5531-11; 1 auxiliary mounting bracket 16-6115-01; neutral lug assembly 12-B-2105-04; Series 5 conversion kit 11-5570-02; instruction sheet 31-1195-01; carton label 15-A-1027-01; carton 48001057 ; 3/8-16x1 RHSNB 11-1580-02 and 3/8-16 belleville washer nut 11-1622-01 listed (qty '-')	A	S478 p.1 (drawing 12-5772, -01 assembly); oem_spec
	Includes straps, cover plates and necessary hardware; connecting strap kit includes front filler plate after 1/91	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Material	copper straps	A	S167 p.8-13; oem_spec
	Copper branch bus	A	S378 single sheet drawing + BOM (scanned image, read visually); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S167, S589 p.8-13 (2005) (s3); oem_spec
	Branch layout 8.75 / 6.88 / 4.38 / 1.88 / 0.00 in; 5.63 / 3.75 / 3.13 / 1.25 in	A	S378 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Connector heights 0.00, 1.88, 4.38, 6.88, 8.75in (8.75in unit); bracket holes 1.25, 3.13, 3.75, 5.63in	A	S478 p.1 (drawing 12-5772, -01 assembly); oem_spec
Mounting-hole pattern	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes	A	same as above
Torque values	Strap-bus hardware (item 16) 72 in-lb; item 29 20 ft-lb; items 20/21 (5/16 HHMS) 12 ft-lb	A	S378 single sheet drawing + BOM (scanned image, read visually); oem_spec
	Strap-bus hardware (item 16) 72 in-lb; item 29 (3/8-16 RHSNB) 20 ft-lb; items 20/21 (5/16-18 HHMS) 12 ft-lb; Series 5 adaptor 13 ft-lb	A	S478 p.1 (drawing 12-5772, -01 assembly); oem_spec
OEM instruction document	Siemens instruction sheet 31-1230-01 Rev. 1: CAT. NO. SSCLD - drawing 12-5772 Rev 8 'SCLD frame mount Series 6 - branch'	A	S378 single sheet drawing + BOM (scanned image, read visually); oem_spec
Status	listed in 2005 price list	A	S167 oem_spec
Identification features	2005 list price $2525.00	A	S167 p.8-13; oem_spec
Cross-links	Families: SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Finish / plating		

EDH-SIE-00350	SDG	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

SB1/SB2/SB3 & P4/P5 branch mounting kit for Sentron VL DG frame breakers (shallow)

OEM part number	SDG	A	S274 pp. 1-4; oem_spec
Installation location	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5); 3-ph 3-w or 4-w	A	same as above
Breaker compatibility	Siemens VL DG frame electronic-trip breakers	A	same as above
Dimensions	Requires 5 in of unit space; A/C link bars 1.375 in vertically between centers	A	same as above
Mounting-hole pattern	B-phase strap into two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A and C straps into 0.228 in holes 1-1/4 in (A) / 3.75 in (C) down; B links (offset 0.281 holes) with 1/4-20 x 1-1/4 screws; breaker line contacts 10-24 socket head cap screws into 0.173 in holes of phase links; mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; load side two 8-32 screws into tapped bracket holes; barrier christmas-tree rivet 0.25 in hole into 0.156 in hole of B strap; provision barrier 10-24 SHCS through 0.228 hole into 0.173 hole of B link	A	same as above
Torque values	Per label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1023-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel (P4, P5) Kit SDG, SDGD for Branch Mounting Type VL DG Frame Breakers	A	same as above
Cross-links	Families: SB, P4, P5		

EDH-SIE-00351	SLM1	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

Switchboard/power panel branch kit SLM1 for Sentron LMD / VL MG frame breakers

OEM part number	SLM1	A	S277 p. 4; oem_spec
Breaker compatibility	Sentron LMD and VL MG frame breakers	A	same as above
Kit contents	Two types of branch neutral lug assemblies; breaker cover plates: rectangular cutout for thermal-magnetic (TMTU) breakers, 'T' cutout for electronic-trip (ETU) breakers	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1016-01 Rev. 3: Switchboard/Power Panel Kit MG1/MG1D/SLM1/SLM1D for Branch Mounting Sentron LMD and VL MG Frame Breakers	A	same as above
Cross-links	Families: SB, P4, P5		
Not yet documented	Dimensions, Mounting-hole pattern		

EDH-SIE-00352	SNB	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

Switchboard/P4/P5 branch kit for GB breakers (shallow)

OEM part number	SNB	A	S284 pp. 1-3; oem_spec
Breaker compatibility	Type GB (NGB, HGB, LGB); 3-ph 3/4-w	A	same as above
Dimensions	Requires 3-3/4 in of unit space	A	same as above
Mounting-hole pattern	A/C straps: two 1/4-20 thread-forming screws through 0.281 in strap holes into 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 0.228 in holes 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; branch connectors #10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker line tabs #10-32 washer head screws	A	same as above
Torque values	All hardware per label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1019-01 Rev. 01: Switchboard/Power Panel Kit SNBD/SNB for Branch Mounting Type GB Breakers	A	same as above
Cross-links	Families: SB, P4, P5		

EDH-SIE-00442	VB610	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE Vacu-Break mounting hardware straps

OEM part number	VB610	A	S444, S485, S589 pp.1-3; oem_spec
Description	Mounting kit for a twin 200 A Vacu-Break in Series 5 (panel & distribution sections), Series 6, FCI and FCII distribution; 3-ph 3W or 4W	A	S485 pp.1-3; oem_spec
	Vacu-Break mounting hardware straps	C	S444 surplus_listing
Application	branch; requires 10in unit space	A	S485 pp.1-3; oem_spec
Installation location	Neutral: 350 kcmil lugs on branch neutral at top or bottom of Z-rail with 3/8-16x1 carriage bolt + 3/8 belleville nut	A	same as above

	SB1, SB2, SB3, FC20, FCI, FCII, VB-5 & VB-6 switchboards (manufactured since 1974)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
	VB / FC switchboards (inference)	C	S444 surplus_listing
Breaker compatibility	Vacu-Break fusible switch	C	same as above
Current rating	200-200	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	Hardware list: 1 200A twin Vacu-Break*; 2 1/4-20x1/2 slotted truss screw*; 2 1/4in spacer*; 1 mounting hardware kit; 8 1/4-20x3/8 slotted HWH screw; 2 350 kcmil lug; 2 3/8-16x1 carriage bolt; 2 3/8 belleville washer nut; 3 switch connector; 4 support bracket; 3 5/16-18x1.5 slotted HWH screw*; 2 1/4-20x1.00 slotted HWH screw*; 1 Series 5 adaptor kit (3x 5/16 insert, 3x 5/16 flat washer, 3x 5/16 lock washer, 3x 5/16-18x1-1/4 HHMS). *items come with the switch	A	S485 pp.1-3; oem_spec
	Straps, cover plates and necessary hardware	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	Fig 4: 4-3/8, 3-5/8, 3-5/8, 16in, 8-3/4, 3-3/8, 5/8in	A	S485 pp.1-3; oem_spec
	Unit height 10 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Mounting-hole pattern	Support bracket hole 5/8in down from top / up from bottom of 10in unit space into 0.228 dia Z-rail holes (1/4-20x3/8 thread-forming); unit line falls between two 0.228 holes; switch brackets have 1/4in hole + 3/8in open-end slot; 7/32in dia holes for 1/4-20x1 thread-forming; Series 5 .406 holes take 5/16 insert, branch bus drilled min .344	A	S485 pp.1-3; oem_spec
Torque values	Series 5 adaptor 5/16-18 bolts 13 ft-lb; others per deadfront label	A	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S444 surplus_listing
Cross-links	Families: SB, CDP6		
Not yet documented	OEM instruction document, Material, oem_status_confirmation		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00375	**SEBPPVA1**	Switchboard / P4 / P5 service entrance barrier kit - horizontal 3VA53/63/54/64	Three-phase single horizontally-mounted 3VA53, 3VA63, 3VA54, 3VA64 (to A	unknown

EDH-SIE-00375 **SEBPPVA1** Siemens lineage barrier **STATUS UNKNOWN**

Switchboard / P4 / P5 service entrance barrier kit - horizontal 3VA53/63/54/64

OEM part number	SEBPPVA1	A	S340 single sheet; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	same as above
Breaker compatibility	Three-phase single horizontally-mounted 3VA53, 3VA63, 3VA54, 3VA64 (top or bottom fed)	A	same as above
Kit contents	1 barrier; 1 P4 barrier bracket; 1 P5/switchboard barrier bracket; 1 service entrance barrier label; 2 plastic tree rivets; 3 1/4-20 x 7/16 screws (30 lb-in)	A	same as above
Torque values	1/4-20 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 15-A-1081-01 Rev. 00: SEBPPVA1 Service Entrance Barrier Kit for Switchboard or P4/P5 (3VA53/63/54/64)	A	same as above
Cross-links	Families: SB, P4, P5		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00216	**6FPB15**	6FPB15 blank plate, 15in unit space	—	unknown

EDH-SIE-00216	6FPB15	Siemens	filler-plate	STATUS UNKNOWN

6FPB15 blank plate, 15in unit space

OEM part number	6FPB15	A	S166 p.11-15; oem_spec
Description	Blank filler plate 15.00in (381mm) for distribution switch or circuit breaker (CSA SMP / FCI / FCII)	A	S166 p.11-15 Table 17; oem_spec
Dimensions	15.00in (381mm)	A	S166 p.11-15; oem_spec
Cross-links	Families: SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00206	**S3VA53PR**	3VA53/63/54/64 single-mount breaker provision hardware kit	—	unknown

EDH-SIE-00206	S3VA53PR	Siemens	hardware-kit	STATUS UNKNOWN

3VA53/63/54/64 single-mount breaker provision hardware kit

OEM part number	S3VA53PR	A	S166 p.11-14; oem_spec
Description	Provision kit for single mount 3VA53, 3VA63, 3VA54 or 3VA64 breakers on factory-provisioned configurations	A	same as above
Kit contents	(3) bus extensions, (3) 3VA5 nut keepers, (3) 3VA6 nut keepers and hardware	A	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00207	**3VA9233-0QA00**	3VA52 250A nut keeper kit (3)	—	unknown
EDH-SIE-00208	**3VA9243-0QA00**	3VA61/62 150A/250A nut keeper kit (3)	—	unknown
EDH-SIE-00209	**3VA9473-0QA00**	3VA5, 3VA6 400A/600A nut keeper kit (3)	—	unknown

EDH-SIE-00207	3VA9233-0QA00	Siemens	fastener	STATUS UNKNOWN

3VA52 250A nut keeper kit (3)

OEM part number	3VA9233-0QA00	A	S166 p.11-14; oem_spec
Description	3VA52 250A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	A	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00208	3VA9243-0QA00	Siemens	fastener	STATUS UNKNOWN

3VA61/62 150A/250A nut keeper kit (3)

OEM part number	3VA9243-0QA00	A	S166 p.11-14; oem_spec
Description	3VA61/62 150A/250A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	A	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00209	3VA9473-0QA00	Siemens	fastener	STATUS UNKNOWN

3VA5, 3VA6 400A/600A nut keeper kit (3)

OEM part number	3VA9473-0QA00	**A**	S166 p.11-14; oem_spec
Description	3VA5, 3VA6 400A/600A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Meter Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00707	**MSK2001**	SMM/SMD metering switchboard replacement meter socket kit, 1-phase	—	unknown
EDH-SIE-00708	**MSK2003**	SMM/SMD metering switchboard replacement meter socket kit, 3-phase	—	unknown
EDH-SIE-00711	**SMMBQMK**	SMM/SMD metering switchboard connecting kit for BQ disconnect	BQ **A**	unknown
EDH-SIE-00715	**SMMCEMK**	SMM/SMD metering switchboard connecting kit for CED disconnect	CED **A**	unknown
EDH-SIE-00713	**SMMEDMK**	SMM/SMD metering switchboard connecting kit for ED disconnect	ED **A**	unknown
EDH-SIE-00714	**SMMFDMK**	SMM/SMD metering switchboard connecting kit for FD disconnect	FD **A**	unknown
EDH-SIE-00710	**SMMHEMK**	SMM/SMD metering switchboard connecting kit for EG disconnect	EG **A**	unknown
EDH-SIE-00709	**SMMNGMK**	SMM/SMD metering switchboard connecting kit for NGG disconnect	NGG **A**	unknown
EDH-SIE-00712	**SMMQJMK**	SMM/SMD metering switchboard connecting kit for QJ disconnect	QJ **A**	unknown
EDH-SIE-00716	**SMMTFMK**	SMM/SMD metering switchboard connecting kit for T-Fuse Pullout disconnect	T-Fuse Pullout **A**	unknown

EDH-SIE-00707	MSK2001	Siemens	meter-kit	STATUS UNKNOWN

SMM/SMD metering switchboard replacement meter socket kit, 1-phase

OEM part number	MSK2001	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Description	Replacement meter socket kit, 1-phase, for SMM and SMD metering switchboards (Siemens type WMS263 meter sockets rated 200 A used in SMM)	**A**	same as above
Cross-links	Families: SB		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00708	MSK2003	Siemens	meter-kit	STATUS UNKNOWN

SMM/SMD metering switchboard replacement meter socket kit, 3-phase

OEM part number	MSK2003	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Description	Replacement meter socket kit, 3-phase, for SMM and SMD metering switchboards (Siemens type WMS263 meter sockets rated 200 A used in SMM)	**A**	same as above
Cross-links	Families: SB		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00711	SMMBQMK	Siemens	meter-kit	STATUS UNKNOWN

SMM/SMD metering switchboard connecting kit for BQ disconnect

OEM part number	SMMBQMK	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Description	Connecting kit for SMM and SMD metering switchboards, disconnect device BQ	A	same as above
Breaker compatibility	BQ	A	same as above
Cross-links	Families: SB		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00715	SMMCEMK	Siemens	meter-kit	STATUS UNKNOWN

SMM/SMD metering switchboard connecting kit for CED disconnect

OEM part number	SMMCEMK	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Description	Connecting kit for SMM and SMD metering switchboards, disconnect device CED	A	same as above
Breaker compatibility	CED	A	same as above
Cross-links	Families: SB · Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00713	SMMEDMK	Siemens	meter-kit	STATUS UNKNOWN

SMM/SMD metering switchboard connecting kit for ED disconnect

OEM part number	SMMEDMK	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Description	Connecting kit for SMM and SMD metering switchboards, disconnect device ED	A	same as above
Breaker compatibility	ED	A	same as above
Cross-links	Families: SB · Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00714	SMMFDMK	Siemens	meter-kit	STATUS UNKNOWN

SMM/SMD metering switchboard connecting kit for FD disconnect

OEM part number	SMMFDMK	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Description	Connecting kit for SMM and SMD metering switchboards, disconnect device FD	A	same as above
Breaker compatibility	FD	A	same as above
Cross-links	Families: SB · Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00710	SMMHEMK	Siemens	meter-kit	STATUS UNKNOWN

SMM/SMD metering switchboard connecting kit for EG disconnect

OEM part number	SMMHEMK	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Description	Connecting kit for SMM and SMD metering switchboards, disconnect device EG	A	same as above
Breaker compatibility	EG	A	same as above
Cross-links	Families: SB		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00709	SMMNGMK	Siemens	meter-kit	STATUS UNKNOWN

SMM/SMD metering switchboard connecting kit for NGG disconnect

OEM part number	SMMNGMK	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Description	Connecting kit for SMM and SMD metering switchboards, disconnect device NGG	A	same as above
Breaker compatibility	NGG	A	same as above
Cross-links	Families: SB · Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00712	SMMQJMK	Siemens	meter-kit	STATUS UNKNOWN

SMM/SMD metering switchboard connecting kit for QJ disconnect

OEM part number	SMMQJMK	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Description	Connecting kit for SMM and SMD metering switchboards, disconnect device QJ	A	same as above
Breaker compatibility	QJ	A	same as above
Cross-links	Families: SB · Breakers: QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00716	SMMTFMK	Siemens	meter-kit	STATUS UNKNOWN

SMM/SMD metering switchboard connecting kit for T-Fuse Pullout disconnect

OEM part number	SMMTFMK	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Description	Connecting kit for SMM and SMD metering switchboards, disconnect device T-Fuse Pullout	A	same as above
Breaker compatibility	T-Fuse Pullout	A	same as above
Cross-links	Families: SB		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00461	**VB6150**	Vacu-Break 15in single unit (400/600A) mounting kit, Series 5/6 branch bus	Fusible switch cat. nos. V7H2205, V7H2206, V7H3205, V7H3206, V7H2605, A	unknown
EDH-SIE-00462	**VB657**	Vacu-Break 5in / 7.5in twin unit mounting kit, Series 5/6 copper branch bus	5in units: V7B2211, V7B2212, V7B2222, V7B3211, V7B3212, V7B3222; 7-1/2 A	unknown
EDH-SIE-00463	**VB671**	Vacu-Break 7.5in / 10in single unit (200A) mounting kit, Series 5/6	7-1/2in units: V7E2204, V7E2603, V7E3603; 10in units: V7F3204, V7F2604 A	unknown

EDH-SIE-00461	VB6150	Siemens	switch-unit	STATUS UNKNOWN

Vacu-Break 15in single unit (400/600A) mounting kit, Series 5/6 branch bus

OEM part number	VB6150	A	S482, S589 p.1 (drawing 11-5075-00, BOM 11-5075-02); oem_spec
Description	Mounting kit (merchandise kit VB6150) for 15.0in high single Vacu-Break fusible switch units on Series 5/6 distribution sections	A	S482 p.1 (drawing 11-5075-00, BOM 11-5075-02); oem_spec
Application	branch	A	same as above
Installation location	Series 5 or 6 distribution sections, CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3	A	same as above
	SB1, SB2, SB3, FC20, FCI, FCII, VB-5 & VB-6 switchboards (manufactured since 1974)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	Fusible switch cat. nos. V7H2205, V7H2206, V7H3205, V7H3206, V7H2605, V7H2606, V7H3605, V7H3606	A	S482 p.1 (drawing 11-5075-00, BOM 11-5075-02); oem_spec
Current rating	400-600	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	1 fusible switch (per cat no.); 1 strap-bus hardware kit 11-B-2022-05; 1 neutral lug assembly 12-B-2105-08; 1 Series 5 conversion kit 11-5570-01; instruction 31-1159-01; carton label 15-A-1027-01; carton 48000989	A	S482 p.1 (drawing 11-5075-00, BOM 11-5075-02); oem_spec
	Straps, cover plates and necessary hardware	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	Unit 17.000in high (16.000in mounting rail), 15.000in wide, 10.500in deep; .625 flange; insert locations 6 places at 1.250/3.750/1.250/2.500/1.250/3.750/1.250; .375 dia holes	A	S482 p.1 (drawing 11-5075-00, BOM 11-5075-02); oem_spec
	Unit height 15 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Mounting-hole pattern	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes	A	S482 p.1 (drawing 11-5075-00, BOM 11-5075-02); oem_spec
Torque values	Al 50 in-lb, Cu 72 in-lb; fasten switch to Z-rail with captive 1/4-20 screws (1/4-20x1/4 SHWHSW); Series 5 adaptor 13 ft-lb	A	same as above
Cross-links	Families: SB, CDP6		
Not yet documented	Material, Status		

EDH-SIE-00462	VB657	Siemens	switch-unit	STATUS UNKNOWN

Vacu-Break 5in / 7.5in twin unit mounting kit, Series 5/6 copper branch bus

OEM part number	VB657	A	S483, S589 p.1 (drawing 11-5073-00, BOM 11-5073-03); oem_spec
Alternate / superseded numbers	VB657C (Merchandise kit number printed on BOM)	A	S483 alias; BOM 11-5073-03 line 44; oem_spec
Description	Mounting kit for V/B 5.0in and 7.5in twin Vacu-Break units on Series 5/6 distribution sections (BOM line 44 shows merchandise kit no. VB657C)	A	S483 p.1 (drawing 11-5073-00, BOM 11-5073-03); oem_spec
Application	branch	A	same as above
Installation location	Series 5 or 6 distribution sections, CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3	A	same as above
	SB1, SB2, SB3, FC20, FCI, FCII, VB-5 & VB-6 switchboards (manufactured since 1974)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec

Breaker compatibility	5in units: V7B2211, V7B2212, V7B2222, V7B3211, V7B3212, V7B3222; 7-1/2in units: V7E2223, V7E2233, V7E3223, V7E3233, V7E2611, V7E2612, V7E3611, V7E3612, V7E3622, V7E3623, V7E3633	**A**	S483 p.1 (drawing 11-5073-00, BOM 11-5073-03); oem_spec
Current rating	30-30, 30-60, 60-60 (5, 7.5 in); 60-100, 100-100 (7.5 in)	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	1 fusible switch; 3 Vacu-Break branch bus 11-7025-01; 4 Vacu-Break mounting bracket 11-6043-01; 8 1/4-20x3/8 SHWHSW 11-1553-02; 1 strap-bus hardware kit 11-B-2022-05; 1 neutral lug assembly 12-B-2105-02; 1 Series 5 conversion kit 11-5570-01; instruction 31-1157-01; carton label 15-A-1027-01; carton 48000989	**A**	S483 p.1 (drawing 11-5073-00, BOM 11-5073-03); oem_spec
	Straps, cover plates and necessary hardware	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	Location dims: 5in unit A=5.000 B=1.250; 7.5in unit A=7.500 B=2.500; .625 offsets, 1.250; switch 17.000in wide, 6.750/10.500in deep	**A**	S483 p.1 (drawing 11-5073-00, BOM 11-5073-03); oem_spec
	Unit height 5 / 7.5 in	**A**	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Mounting-hole pattern	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes; When connecting switch bus to branch bus a 5/16 insert is required in aluminum (only) branch bus; with multiple units each mounting bracket supports one corner of two units	**A**	S483 p.1 (drawing 11-5073-00, BOM 11-5073-03); oem_spec
Torque values	Strap-bus hardware (item 5): 50 in-lb Al, 72 in-lb Cu; Series 5 adaptor 13 ft-lb	**A**	same as above
Cross-links	Families: SB, CDP6		
Not yet documented	Material, Status		

EDH-SIE-00463	VB671	Siemens	switch-unit	STATUS UNKNOWN

Vacu-Break 7.5in / 10in single unit (200A) mounting kit, Series 5/6

OEM part number	VB671	A	S484, S589 p.1 (drawing 11-5074-00, BOM 11-5074-04); oem_spec
Description	Mounting kit for V/B 7.5in and 10.0in single 200 A Vacu-Break units on Series 5/6 distribution sections (merchandise kit VB671)	A	S484 p.1 (drawing 11-5074-00, BOM 11-5074-04); oem_spec
Application	branch	A	same as above
Installation location	Series 5 or 6 distribution sections, CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3	A	same as above
	SB1, SB2, SB3, FC20, FCI, FCII, VB-5 & VB-6 switchboards (manufactured since 1974)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Breaker compatibility	7-1/2in units: V7E2204, V7E2603, V7E3603; 10in units: V7F3204, V7F2604, V7F3604	A	S484 p.1 (drawing 11-5074-00, BOM 11-5074-04); oem_spec
Current rating	100 (7.5 in); 200 (7.5, 10 in)	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Kit contents	1 fusible switch; 3 Vacu-Break branch bus 11-7025-01; 4 Vacu-Break mounting bracket 11-6043-01; 8 1/4-20x3/8 SHWHSW 11-1553-02; 1 strap-bus hardware kit 11-B-2022-05; 1 neutral lug assembly 12-B-2105-03; 1 Series 5 conversion kit 11-5570-01; instruction 31-1158-01; carton label 15-A-1027-01; carton 48000989	A	S484 p.1 (drawing 11-5074-00, BOM 11-5074-04); oem_spec
	Straps, cover plates and necessary hardware	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Dimensions	7.5in unit A=7.500 B=2.500; 10in unit A=10.000 B=3.750; .625, 1.250; switch 17.000in wide, 6.750/10.500in deep	A	S484 p.1 (drawing 11-5074-00, BOM 11-5074-04); oem_spec
	Unit height 7.5 / 10 in	A	S589 p.13-20 'Switchboard Replacement Parts and Modification Kits'; oem_spec
Mounting-hole pattern	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes; When connecting switch bus to branch bus a 5/16 insert is required in aluminum (only) branch bus; with multiple units each mounting bracket supports one corner of two units	A	S484 p.1 (drawing 11-5074-00, BOM 11-5074-04); oem_spec
Torque values	Strap-bus hardware: 50 in-lb Al, 72 in-lb Cu; Series 5 adaptor 13 ft-lb	A	same as above
Cross-links	Families: SB, CDP6		
Not yet documented	Material, Status		

6.15 SBP — Super Blue Pennant / Blue Pennant stock service entrance switchboards

FAM-SIE-015 · switchboard · markings: Siemens

Siemens stock service-entrance switchboards (Blue Pennant / Super Blue Pennant): EUSERC utility metering compartment plus main Vacu-Break fusible switch (400-1200 A) or molded-case breaker main, optional distribution panel kits (PQ/PE/PF), subfeed kits (PSFFJ6/PSFJL6) and PUG/WPUG underground pull sections with PLL lug landing kits.

Attribute	Value	Cl.	Sources
Main ampacity	400-1200 A (connector table 400/600/800/1000/1200 A)	A	S589 pp.13-11..13-17; oem_spec

Key documents: S577 12-C-1010-01 Rev. 6 Blue Pennant Switchboard Installation Instructions - Lug Landing Kit Catalog No. PLL44, PL; S589 SPEEDFAX 2011 pp.13-11..13-20 SPEEDFAX 2011 Product Catalog, Section 13 Switchboards - Stock Service Entrance Switchboar
Also fits this family (entry printed elsewhere): QF3, EBF1

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00661	**PLL44**	Blue Pennant switchboard PUG/WPUG pull-section lug landing kit	—	unknown
EDH-SIE-00662	**PLL46**	Blue Pennant switchboard PUG/WPUG pull-section lug landing kit	—	unknown
EDH-SIE-00663	**PLL48**	Blue Pennant switchboard PUG/WPUG pull-section lug landing kit	—	unknown

EDH-SIE-00661	PLL44	Siemens	main-lug-kit	STATUS UNKNOWN

Blue Pennant switchboard PUG/WPUG pull-section lug landing kit

OEM part number	PLL44	**A**	S577, S589 pp.1-3; oem_spec
Description	Lug landing kit for Siemens type PUG and WPUG underground pull section (Blue Pennant switchboard); connects utility conductors for 1-ph 3W, 3-ph 3W or 3-ph 4W; cables run to switchboard CT compartment lugs	**A**	S577 pp.1-3; oem_spec
	Lug landing kit, 1-phase 3-wire or 3-phase 4-wire; requires PUG26 or WPUG26 underground pull section	**A**	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Application	service entrance pull section (utility cable landing)	**A**	S577 pp.1-3; oem_spec
Current rating	400 A	**A**	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Kit contents	1 lug landing support bracket; 1 lug landing assembly; 4 1/4-20x5/8 slotted hex washer head thread-forming screw; 1 torque label; 2 delta label (B or C phase high leg); 1 high leg label; 4 1/4-20x3/4 round head square neck bolt; 4 1/4-20 belleville washer nut; 1 lug landing kit label	**A**	S577 pp.1-3; oem_spec
Dimensions	Location dimension A (bracket height): PUG 48.56in, WPUG 50.88in; 1.25in offset	**A**	same as above
Mounting-hole pattern	Support bracket ('Z' shape) secured to rear of pull section with 1/4-20x3/4 carriage bolts and nuts through two 5/16in holes; lug assembly to bracket with 1/4-20x5/8 thread-forming screws (lugs facing up)	**A**	same as above
Torque values	Per torque label supplied in kit (values not printed on sheet)	**A**	same as above
Identification features	Catalog number and amperage rating/wiring configuration shown on lug landing kit label on side sheet of pull section	**A**	same as above
Cross-links	Families: SBP		
Not yet documented	Material, Status		
Open question	*Ampere rating / lug quantity differences between PLL44, PLL46 and PLL48 not stated on sheet.*		

EDH-SIE-00662	PLL46	Siemens	main-lug-kit	STATUS UNKNOWN

Blue Pennant switchboard PUG/WPUG pull-section lug landing kit

OEM part number	PLL46	A	S577, S589 pp.1-3; oem_spec
Description	Lug landing kit for Siemens type PUG and WPUG underground pull section (Blue Pennant switchboard); connects utility conductors for 1-ph 3W, 3-ph 3W or 3-ph 4W; cables run to switchboard CT compartment lugs	A	S577 pp.1-3; oem_spec
	Lug landing kit, 1-phase 3-wire or 3-phase 4-wire; requires PUG26 or WPUG26 underground pull section	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Application	service entrance pull section (utility cable landing)	A	S577 pp.1-3; oem_spec
Current rating	600 A	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Kit contents	1 lug landing support bracket; 1 lug landing assembly; 4 1/4-20x5/8 slotted hex washer head thread-forming screw; 1 torque label; 2 delta label (B or C phase high leg); 1 high leg label; 4 1/4-20x3/4 round head square neck bolt; 4 1/4-20 belleville washer nut; 1 lug landing kit label	A	S577 pp.1-3; oem_spec
Dimensions	Location dimension A (bracket height): PUG 48.56in, WPUG 50.88in; 1.25in offset	A	same as above
Mounting-hole pattern	Support bracket ('Z' shape) secured to rear of pull section with 1/4-20x3/4 carriage bolts and nuts through two 5/16in holes; lug assembly to bracket with 1/4-20x5/8 thread-forming screws (lugs facing up)	A	same as above
Torque values	Per torque label supplied in kit (values not printed on sheet)	A	same as above
Identification features	Catalog number and amperage rating/wiring configuration shown on lug landing kit label on side sheet of pull section	A	same as above
Cross-links	Families: SBP		
Not yet documented	Material, Status		
Open question	*Ampere rating / lug quantity differences between PLL44, PLL46 and PLL48 not stated on sheet.*		

EDH-SIE-00663	PLL48	Siemens	main-lug-kit	STATUS UNKNOWN

Blue Pennant switchboard PUG/WPUG pull-section lug landing kit

OEM part number	PLL48	A	S577, S589 pp.1-3; oem_spec
Description	Lug landing kit for Siemens type PUG and WPUG underground pull section (Blue Pennant switchboard); connects utility conductors for 1-ph 3W, 3-ph 3W or 3-ph 4W; cables run to switchboard CT compartment lugs	A	S577 pp.1-3; oem_spec
	Lug landing kit, 1-phase 3-wire or 3-phase 4-wire; requires PUG26 or WPUG26 underground pull section	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Application	service entrance pull section (utility cable landing)	A	S577 pp.1-3; oem_spec
Current rating	800 A	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Kit contents	1 lug landing support bracket; 1 lug landing assembly; 4 1/4-20x5/8 slotted hex washer head thread-forming screw; 1 torque label; 2 delta label (B or C phase high leg); 1 high leg label; 4 1/4-20x3/4 round head square neck bolt; 4 1/4-20 belleville washer nut; 1 lug landing kit label	A	S577 pp.1-3; oem_spec
Dimensions	Location dimension A (bracket height): PUG 48.56in, WPUG 50.88in; 1.25in offset	A	same as above
Mounting-hole pattern	Support bracket ('Z' shape) secured to rear of pull section with 1/4-20x3/4 carriage bolts and nuts through two 5/16in holes; lug assembly to bracket with 1/4-20x5/8 thread-forming screws (lugs facing up)	A	same as above
Torque values	Per torque label supplied in kit (values not printed on sheet)	A	same as above
Identification features	Catalog number and amperage rating/wiring configuration shown on lug landing kit label on side sheet of pull section	A	same as above
Cross-links	Families: SBP		
Not yet documented	Material, Status		
Open question	*Ampere rating / lug quantity differences between PLL44, PLL46 and PLL48 not stated on sheet.*		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00734	**PSFFJ6**	Super Blue Pennant circuit breaker subfeed kit, FXD6 225A	—	unknown
EDH-SIE-00735	**PSFJL6**	Super Blue Pennant circuit breaker subfeed kit, JXD6/JD6/HJD6 400A	—	unknown

EDH-SIE-00734 **PSFFJ6** Siemens sub-feed-lug-kit **STATUS UNKNOWN**

Super Blue Pennant circuit breaker subfeed kit, FXD6 225A

OEM part number	PSFFJ6	**A**	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Subfeed kit for FXD6-225A 2 or 3-pole (breaker not included); includes phase and neutral load lugs and neutral link assembly; 2-pole FXD6 requires 3-pole space	**A**	same as above
Cross-links	Families: SBP · Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Material, Status, Torque values		

EDH-SIE-00735 **PSFJL6** Siemens sub-feed-lug-kit **STATUS UNKNOWN**

Super Blue Pennant circuit breaker subfeed kit, JXD6/JD6/HJD6 400A

OEM part number	PSFJL6	**A**	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Subfeed kit for JXD6, JD6, HJD6 400 A 2 or 3-pole (breaker not included)	**A**	same as above
Cross-links	Families: SBP · Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Dimensions, Material, Status, Torque values		

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00719	**LKB4**	Super Blue Pennant main device load-side lug kit, 400 A (circuit breaker)	—	unknown
EDH-SIE-00720	**LKB6**	Super Blue Pennant main device load-side lug kit, 600 A (circuit breaker)	—	unknown
EDH-SIE-00721	**LKB8**	Super Blue Pennant main device load-side lug kit, 800 A (circuit breaker)	—	unknown
EDH-SIE-00717	**LKF4**	Super Blue Pennant main device load-side lug kit, 400 A (fusible switch)	—	unknown
EDH-SIE-00718	**LKF6**	Super Blue Pennant main device load-side lug kit, 600 A (fusible switch)	—	unknown

EDH-SIE-00719 **LKB4** Siemens lug-kit **STATUS UNKNOWN**

Super Blue Pennant main device load-side lug kit, 400 A (circuit breaker)

OEM part number	LKB4	**A**	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Load side lugs for circuit breaker main device; wire range (1) 600-750 kcmil Cu/Al	**A**	same as above
Current rating	400 A	**A**	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00720 **LKB6** Siemens lug-kit **STATUS UNKNOWN**

Super Blue Pennant main device load-side lug kit, 600 A (circuit breaker)

OEM part number	LKB6	**A**	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Load side lugs for circuit breaker main device; wire range (2) 3/0-350 kcmil Cu/Al	**A**	same as above
Current rating	600 A	**A**	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00721	LKB8	Siemens	lug-kit	STATUS UNKNOWN

Super Blue Pennant main device load-side lug kit, 800 A (circuit breaker)

OEM part number	LKB8	A	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Load side lugs for circuit breaker main device; wire range (2) 600-750 kcmil Cu/Al	A	same as above
Current rating	800 A	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00717	LKF4	Siemens	lug-kit	STATUS UNKNOWN

Super Blue Pennant main device load-side lug kit, 400 A (fusible switch)

OEM part number	LKF4	A	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Load side lugs for fusible switch main device; wire range (1) 3/0-750 kcmil Cu/Al	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00718	LKF6	Siemens	lug-kit	STATUS UNKNOWN

Super Blue Pennant main device load-side lug kit, 600 A (fusible switch)

OEM part number	LKF6	A	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Load side lugs for fusible switch main device; wire range (2) 3/0-500 kcmil Cu/Al	A	same as above
Current rating	600 A	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00751	**PEGB42**	Super Blue Pennant equipment ground bus	—	unknown

EDH-SIE-00751	PEGB42	Siemens	ground-bar	STATUS UNKNOWN

Super Blue Pennant equipment ground bus

OEM part number	PEGB42	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	Equipment ground bus accessory	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

Interior

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00726	**PE4630**	Super Blue Pennant distribution panel kit 400/600 A (30 ED4)	—	unknown
EDH-SIE-00732	**PE4840**	Super Blue Pennant distribution panel kit 800 A (40 ED4)	—	unknown
EDH-SIE-00727	**PF4606**	Super Blue Pennant distribution panel kit 400/600 A (12 ED4 + 6 FXD6)	—	unknown
EDH-SIE-00733	**PF4809**	Super Blue Pennant distribution panel kit 800 A (12 ED4 + 9 FXD6)	—	unknown
EDH-SIE-00723	**PQ2612**	Super Blue Pennant distribution panel kit 400/600 A (12 QP/HQ + 12 QJ2/QJH2 poles)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00722	**PQ2630**	Super Blue Pennant distribution panel kit 400/600 A (30 QP/HQ poles)	—	unknown
EDH-SIE-00729	**PQ2816**	Super Blue Pennant distribution panel kit 800 A (12 QP/HQ + 16 QJ2/QJH2)	—	unknown
EDH-SIE-00728	**PQ2840**	Super Blue Pennant distribution panel kit 800 A (40 QP/HQ)	—	unknown
EDH-SIE-00725	**PQ4612**	Super Blue Pennant distribution panel kit 400/600 A (12 QP/HQ + 12 QJ2/QJH2)	—	unknown
EDH-SIE-00724	**PQ4630**	Super Blue Pennant distribution panel kit 400/600 A (30 QP/HQ)	—	unknown
EDH-SIE-00731	**PQ4818**	Super Blue Pennant distribution panel kit 800 A (12 QP/HQ + 18 QJ2/QJH2)	—	unknown
EDH-SIE-00730	**PQ4840**	Super Blue Pennant distribution panel kit 800 A (40 QP/HQ)	—	unknown

EDH-SIE-00726 PE4630 Siemens interior STATUS UNKNOWN

Super Blue Pennant distribution panel kit 400/600 A (30 ED4)

OEM part number	PE4630	**A**	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Distribution panel kit for Super Blue Pennant switchboard; breaker poles: 30 ED4; weight 42 lb; includes branch neutral and disconnect link assembly	**A**	same as above
Application	branch distribution section	**A**	same as above
Voltage rating	480Y/277V 3-ph 4-W	**A**	same as above
Current rating	400/600 A	**A**	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Material, Status, Torque values		
Open question	*Voltage/row alignment in extracted table may be shifted by one row; verify against PDF.*		

EDH-SIE-00732 PE4840 Siemens interior STATUS UNKNOWN

Super Blue Pennant distribution panel kit 800 A (40 ED4)

OEM part number	PE4840	**A**	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Distribution panel kit for Super Blue Pennant switchboard; breaker poles: 40 ED4; weight 65 lb; includes branch neutral and disconnect link assembly	**A**	same as above
Application	branch distribution section	**A**	same as above
Voltage rating	480V class	**A**	same as above
Current rating	800 A	**A**	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Material, Status, Torque values		
Open question	*Voltage/row alignment in extracted table may be shifted by one row; verify against PDF.*		

EDH-SIE-00727 PF4606 Siemens interior STATUS UNKNOWN

Super Blue Pennant distribution panel kit 400/600 A (12 ED4 + 6 FXD6)

OEM part number	PF4606	**A**	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Distribution panel kit for Super Blue Pennant switchboard; breaker poles: 12 ED4 + 6 FXD6; weight 65 lb; includes branch neutral and disconnect link assembly	**A**	same as above
Application	branch distribution section	**A**	same as above
Voltage rating	480V 3-ph 3-W	**A**	same as above
Current rating	400/600 A	**A**	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Material, Status, Torque values		
Open question	*Voltage/row alignment in extracted table may be shifted by one row; verify against PDF.*		

EDH-SIE-00733	PF4809	Siemens	interior	STATUS UNKNOWN

Super Blue Pennant distribution panel kit 800 A (12 ED4 + 9 FXD6)

OEM part number	PF4809	A	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Distribution panel kit for Super Blue Pennant switchboard; breaker poles: 12 ED4 + 9 FXD6; weight 70 lb; includes branch neutral and disconnect link assembly	A	same as above
Application	branch distribution section	A	same as above
Voltage rating	480V 3-ph 3-W	A	same as above
Current rating	800 A	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Material, Status, Torque values		
Open question	*Voltage/row alignment in extracted table may be shifted by one row; verify against PDF.*		

EDH-SIE-00723	PQ2612	Siemens	interior	STATUS UNKNOWN

Super Blue Pennant distribution panel kit 400/600 A (12 QP/HQ + 12 QJ2/QJH2 poles)

OEM part number	PQ2612	A	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Distribution panel kit for Super Blue Pennant switchboard; breaker poles: 12 QP/HQ + 12 QJ2/QJH2 poles; weight 39 lb; includes branch neutral and disconnect link assembly	A	same as above
Application	branch distribution section	A	same as above
Voltage rating	120/240V 1-ph 3-W	A	same as above
Current rating	400/600 A	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Material, Status, Torque values		
Open question	*Voltage/row alignment in extracted table may be shifted by one row; verify against PDF.*		

EDH-SIE-00722	PQ2630	Siemens	interior	STATUS UNKNOWN

Super Blue Pennant distribution panel kit 400/600 A (30 QP/HQ poles)

OEM part number	PQ2630	A	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Distribution panel kit for Super Blue Pennant switchboard; breaker poles: 30 QP/HQ poles; weight 39 lb; includes branch neutral and disconnect link assembly	A	same as above
Application	branch distribution section	A	same as above
Voltage rating	120/240V 1-ph 3-W	A	same as above
Current rating	400/600 A	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Material, Status, Torque values		
Open question	*Voltage/row alignment in extracted table may be shifted by one row; verify against PDF.*		

EDH-SIE-00729	PQ2816	Siemens	interior	STATUS UNKNOWN

Super Blue Pennant distribution panel kit 800 A (12 QP/HQ + 16 QJ2/QJH2)

OEM part number	PQ2816	A	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Distribution panel kit for Super Blue Pennant switchboard; breaker poles: 12 QP/HQ + 16 QJ2/QJH2; weight 65 lb; includes branch neutral and disconnect link assembly	A	same as above
Application	branch distribution section	A	same as above
Voltage rating	120/240V 1-ph 3-W	A	same as above
Current rating	800 A	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Material, Status, Torque values		
Open question	*Voltage/row alignment in extracted table may be shifted by one row; verify against PDF.*		

EDH-SIE-00728	PQ2840	Siemens	interior	STATUS UNKNOWN

Super Blue Pennant distribution panel kit 800 A (40 QP/HQ)

OEM part number	PQ2840	A	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Distribution panel kit for Super Blue Pennant switchboard; breaker poles: 40 QP/HQ; weight 65 lb; includes branch neutral and disconnect link assembly	A	same as above
Application	branch distribution section	A	same as above
Voltage rating	120/240V 1-ph 3-W	A	same as above
Current rating	800 A	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Material, Status, Torque values		
Open question	*Voltage/row alignment in extracted table may be shifted by one row; verify against PDF.*		

EDH-SIE-00725	PQ4612	Siemens	interior	STATUS UNKNOWN

Super Blue Pennant distribution panel kit 400/600 A (12 QP/HQ + 12 QJ2/QJH2)

OEM part number	PQ4612	A	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Distribution panel kit for Super Blue Pennant switchboard; breaker poles: 12 QP/HQ + 12 QJ2/QJH2; weight 42 lb; includes branch neutral and disconnect link assembly	A	same as above
Application	branch distribution section	A	same as above
Voltage rating	same 3-ph 240V class	A	same as above
Current rating	400/600 A	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Material, Status, Torque values		
Open question	*Voltage/row alignment in extracted table may be shifted by one row; verify against PDF.*		

EDH-SIE-00724	PQ4630	Siemens	interior	STATUS UNKNOWN

Super Blue Pennant distribution panel kit 400/600 A (30 QP/HQ)

OEM part number	PQ4630	A	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Distribution panel kit for Super Blue Pennant switchboard; breaker poles: 30 QP/HQ; weight 42 lb; includes branch neutral and disconnect link assembly	A	same as above
Application	branch distribution section	A	same as above
Voltage rating	240/120V 3-ph 4-W delta; 240V 3-ph 3-W; 208Y/120V 3-ph 4-W	A	same as above
Current rating	400/600 A	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Material, Status, Torque values		
Open question	*Voltage/row alignment in extracted table may be shifted by one row; verify against PDF.*		

EDH-SIE-00731	PQ4818	Siemens	interior	STATUS UNKNOWN

Super Blue Pennant distribution panel kit 800 A (12 QP/HQ + 18 QJ2/QJH2)

OEM part number	PQ4818	A	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Distribution panel kit for Super Blue Pennant switchboard; breaker poles: 12 QP/HQ + 18 QJ2/QJH2; weight 70 lb; includes branch neutral and disconnect link assembly	A	same as above
Application	branch distribution section	A	same as above
Voltage rating	208Y/120V class	A	same as above
Current rating	800 A	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Material, Status, Torque values		
Open question	*Voltage/row alignment in extracted table may be shifted by one row; verify against PDF.*		

EDH-SIE-00730	PQ4840	Siemens	interior	STATUS UNKNOWN

Super Blue Pennant distribution panel kit 800 A (40 QP/HQ)

OEM part number	PQ4840	A	S589 p.13-16 'Super Blue Pennant Switchboards - Selection'; oem_spec
Description	Distribution panel kit for Super Blue Pennant switchboard; breaker poles: 40 QP/HQ; weight 70 lb; includes branch neutral and disconnect link assembly	A	same as above
Application	branch distribution section	A	same as above
Voltage rating	240/120V delta; 240V 3-ph 3-W; 208Y/120V	A	same as above
Current rating	800 A	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Material, Status, Torque values		
Open question	*Voltage/row alignment in extracted table may be shifted by one row; verify against PDF.*		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00740	**PLW10**	Super Blue Pennant pull section	—	unknown
EDH-SIE-00736	**PUG14**	Super Blue Pennant pull section	—	unknown
EDH-SIE-00738	**PUG26**	Super Blue Pennant pull section	—	unknown
EDH-SIE-00737	**WPUG14**	Super Blue Pennant pull section	—	unknown
EDH-SIE-00739	**WPUG26**	Super Blue Pennant pull section	—	unknown

EDH-SIE-00740	PLW10	Siemens	box/enclosure	STATUS UNKNOWN

Super Blue Pennant pull section

OEM part number	PLW10	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	10in wide load wiring section	A	same as above
Cross-links	Families: SBP		
Not yet documented	Kit contents, Material, Status, Torque values		

EDH-SIE-00736	PUG14	Siemens	box/enclosure	STATUS UNKNOWN

Super Blue Pennant pull section

OEM part number	PUG14	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	Underground pull / load-wiring section 14.5in deep x 90in high, 14in wide (12in opening), indoor	A	same as above
Cross-links	Families: SBP		
Not yet documented	Kit contents, Material, Status, Torque values		

EDH-SIE-00738	PUG26	Siemens	box/enclosure	STATUS UNKNOWN

Super Blue Pennant pull section

OEM part number	PUG26	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	26in wide (24in opening), indoor	A	same as above
Cross-links	Families: SBP		
Not yet documented	Kit contents, Material, Status, Torque values		

EDH-SIE-00737	WPUG14	Siemens	box/enclosure	STATUS UNKNOWN

Super Blue Pennant pull section

OEM part number	WPUG14	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	same, 15in wide outdoor	A	same as above
Cross-links	Families: SBP		
Not yet documented	Kit contents, Material, Status, Torque values		

EDH-SIE-00739	WPUG26	Siemens	box/enclosure	STATUS UNKNOWN

Super Blue Pennant pull section

OEM part number	WPUG26	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	27in wide (24in opening), outdoor	A	same as above
Cross-links	Families: SBP		
Not yet documented	Kit contents, Material, Status, Torque values		

Fuse Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00741	**SSRK35**	Vacu-Break switch fuse clip adapter kit	—	unknown
EDH-SIE-00742	**SSRK36**	Vacu-Break switch fuse clip adapter kit	—	unknown
EDH-SIE-00747	**TFAK52**	Vacu-Break switch fuse clip adapter kit	—	unknown
EDH-SIE-00748	**TFAK55**	Vacu-Break switch fuse clip adapter kit	—	unknown
EDH-SIE-00749	**TFAK62**	Vacu-Break switch fuse clip adapter kit	—	unknown
EDH-SIE-00750	**TFAK65**	Vacu-Break switch fuse clip adapter kit	—	unknown
EDH-SIE-00745	**W49813**	Vacu-Break switch fuse clip adapter kit	—	unknown
EDH-SIE-00743	**W49814**	Vacu-Break switch fuse clip adapter kit	—	unknown
EDH-SIE-00746	**W49815**	Vacu-Break switch fuse clip adapter kit	—	unknown
EDH-SIE-00744	**W49816**	Vacu-Break switch fuse clip adapter kit	—	unknown

EDH-SIE-00741	SSRK35	Siemens	fuse-kit	STATUS UNKNOWN

Vacu-Break switch fuse clip adapter kit

OEM part number	SSRK35	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	'R' fuse clip adapter kit (set of 3) 400A 250/600V (discount schedule VBSS)	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00742	SSRK36	Siemens	fuse-kit	STATUS UNKNOWN

Vacu-Break switch fuse clip adapter kit

OEM part number	SSRK36	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	'R' fuse clip adapter kit (set of 3) 600A 250/600V (discount schedule VBSS)	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00747	TFAK52	Siemens	fuse-kit	STATUS UNKNOWN

Vacu-Break switch fuse clip adapter kit

OEM part number	TFAK52	**A**	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	'T' fuse clip adapter kit (one pole) 400A 240V (discount schedule VBSS)	**A**	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00748	TFAK55	Siemens	fuse-kit	STATUS UNKNOWN

Vacu-Break switch fuse clip adapter kit

OEM part number	TFAK55	**A**	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	'T' fuse adapter 400A 600V (discount schedule VBSS)	**A**	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00749	TFAK62	Siemens	fuse-kit	STATUS UNKNOWN

Vacu-Break switch fuse clip adapter kit

OEM part number	TFAK62	**A**	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	'T' fuse adapter 600A 240V (discount schedule VBSS)	**A**	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00750	TFAK65	Siemens	fuse-kit	STATUS UNKNOWN

Vacu-Break switch fuse clip adapter kit

OEM part number	TFAK65	**A**	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	'T' fuse adapter 600A 600V (discount schedule VBSS)	**A**	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00745	W49813	Siemens	fuse-kit	STATUS UNKNOWN

Vacu-Break switch fuse clip adapter kit

OEM part number	W49813	**A**	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	'J' fuse clip adapter kit 600A 240V (discount schedule VBSS)	**A**	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00743	W49814	Siemens	fuse-kit	STATUS UNKNOWN

Vacu-Break switch fuse clip adapter kit

OEM part number	W49814	**A**	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	'J' fuse clip adapter kit (set of 3) 400A 250V (discount schedule VBSS)	**A**	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00746	W49815	Siemens	fuse-kit	STATUS UNKNOWN

Vacu-Break switch fuse clip adapter kit

OEM part number	W49815	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	'J' fuse clip adapter kit 600A 600V (discount schedule VBSS)	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00744	W49816	Siemens	fuse-kit	STATUS UNKNOWN

Vacu-Break switch fuse clip adapter kit

OEM part number	W49816	A	S589 p.13-17 'Super Blue Pennant Switchboards - Accessories'; oem_spec
Description	'J' fuse clip adapter kit 400A 600V (discount schedule VBSS)	A	same as above
Cross-links	Families: SBP		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

6.16 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family BQ / BQH / HBQ / BQXD bolt-on

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00247	**TA1Q1**	Siemens TA1Q1 line-side lug, BQ 45-125A	BQ family line side 45-125 A; BQXD 45-60 A line (and load on QLD versi A	current
EDH-SIE-00245	**TC1Q1**	Siemens TC1Q1 line-side lug, BQ 15-40A (steel)	BQ, BQH, BQHF, BQE, BQF, BL, BLH, HBL, HBQ line side 15-40 A; BQXD lin A	current

EDH-SIE-00247	TA1Q1	Siemens	lug	CURRENT

Siemens TA1Q1 line-side lug, BQ 45-125A

OEM part number	TA1Q1	A	S203, S204 s6 p. 7-153; 7-39; oem_spec
Description	Mechanical line-side lug; sold in package of six	A	same as above
Application	accessory	A	same as above
Installation location	Line side	A	S203 s6 p. 7-153; oem_spec
Breaker compatibility	BQ family line side 45-125 A; BQXD 45-60 A line (and load on QLD versions)	A	S203, S204 s6 p. 7-153; 7-39; oem_spec
Kit contents	1 lug; sold in pkg of 6; wire range (1) #8-#1 AWG Cu / #6-#1/0 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00245	TC1Q1	Siemens	lug	CURRENT

Siemens TC1Q1 line-side lug, BQ 15-40A (steel)

OEM part number	TC1Q1	A	S203, S204 s6 p. 7-153; 7-39; oem_spec
Description	Mechanical line-side lug, steel body; sold in package of six	A	same as above
Application	accessory	A	same as above
Installation location	Line side (BQ family; load-side lugs are integral)	A	S203 s6 p. 7-153; oem_spec
Breaker compatibility	BQ, BQH, BQHF, BQE, BQF, BL, BLH, HBL, HBQ line side 15-40 A; BQXD line side; NGG/HGG/LGG 15-30 A	A	S203, S204 s6 p. 7-153; 7-39; oem_spec
Kit contents	1 lug; sold in pkg of 6; wire range (1) #14-#6 AWG Cu / #12-#6 AWG Al (BQXD table: #16-#6 Cu)	A	same as above
Material	{'value': 'Steel', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-153'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: BQ / BQH / HBQ / BQXD bolt-on, NGG / HGG / LGG (G-frame bolt-on/lug)		
Requires	TNKG3 (EDH-SIE-00249)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00252	**BQFS2**	Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)	Type BQ/BQXD A	current

EDH-SIE-00252	BQFS2	Siemens	barrier	CURRENT

Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)

OEM part number	BQFS2	A	S203, S204 s6 p. 7-39 and accessories page; oem_spec
Alternate / superseded numbers	BQFS1K (Bulk pack of 1000 pieces)	A	S203 equivalent; s6 p. 7-39; oem_spec
Description	Finger safe terminal shield: protects against accidental contact with lugs, 1 per lug; fits line and load end	A	S203, S204 s6 p. 7-39 and accessories page; oem_spec
Application	accessory	A	same as above
Installation location	Over each lug, line or load end	A	S203 p. 7-39; oem_spec
Breaker compatibility	Type BQ/BQXD	A	S203, S204 s6 p. 7-39 and accessories page; oem_spec
Kit contents	2 pieces	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family BQD / CQD (incl. BQD6, CQD6)

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00529	**CQDFMB1**	CQD face mounting bracket, 1-pole	CQD circuit breakers only A	unknown
EDH-SIE-00530	**CQDFMB2**	CQD face mounting bracket, 2-pole	CQD circuit breakers only A	unknown
EDH-SIE-00531	**CQDFMB3**	CQD face mounting bracket, 3-pole	CQD circuit breakers only A	unknown

EDH-SIE-00529	CQDFMB1	Siemens	mounting-bracket	STATUS UNKNOWN

CQD face mounting bracket, 1-pole

OEM part number	CQDFMB1	A	S545 p.1; oem_spec
Breaker compatibility	CQD circuit breakers only	A	same as above
Poles	1-pole	A	same as above
Kit contents	One face mounting bracket kit (bracket, locking clip, escutcheon); mount with (4) #6-32 tapped holes	A	same as above
Mounting-hole pattern	Template: (4) .145 dia holes for #6-32 screws; breaker escutcheon cut-out 2.28in x 1.00in; 5.25in overall, 1.41in	A	same as above
Cross-links	Breakers: BQD / CQD (incl. BQD6, CQD6)		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00530	CQDFMB2	Siemens	mounting-bracket	STATUS UNKNOWN

CQD face mounting bracket, 2-pole

OEM part number	CQDFMB2	A	S545 p.1; oem_spec
Breaker compatibility	CQD circuit breakers only	A	same as above
Poles	2-pole	A	same as above
Kit contents	One face mounting bracket kit (bracket, locking clip, escutcheon); mount with (4) #6-32 tapped holes	A	same as above
Mounting-hole pattern	Template: (4) .145 dia holes for #6-32 screws; breaker escutcheon cut-out 2.28in x 2.00in; 5.25in overall, 1.41in	A	same as above
Cross-links	Breakers: BQD / CQD (incl. BQD6, CQD6)		
Not yet documented	Material, Status, Torque values		

EDH-SIE-00531	CQDFMB3	Siemens	mounting-bracket	STATUS UNKNOWN

CQD face mounting bracket, 3-pole

OEM part number	CQDFMB3	A	S545 p.1; oem_spec
Breaker compatibility	CQD circuit breakers only	A	same as above
Poles	3-pole	A	same as above
Kit contents	One face mounting bracket kit (bracket, locking clip, escutcheon); mount with (4) #6-32 tapped holes	A	same as above
Mounting-hole pattern	Template: (4) .145 dia holes for #6-32 screws; breaker escutcheon cut-out 2.28in x 3.00in; 5.25in overall, 1.41in	A	same as above
Cross-links	Breakers: BQD / CQD (incl. BQD6, CQD6)		
Not yet documented	Material, Status, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00528	**CQDSMK**	CQD breaker screw mounting kit	CQD (2- and 3-pole; not 1-pole CQD) A	unknown

EDH-SIE-00528	CQDSMK	Siemens	fastener	STATUS UNKNOWN

CQD breaker screw mounting kit

OEM part number	CQDSMK	A	S544 p.1; oem_spec
Breaker compatibility	CQD (2- and 3-pole; not 1-pole CQD)	A	same as above
Kit contents	(4) #6-32 UNC screws and (2) standoffs	A	same as above
Dimensions	Mounting hole template on sheet; 1.00in standoff	A	same as above
Torque values	8 in-lb	A	same as above
Cross-links	Breakers: BQD / CQD (incl. BQD6, CQD6)		
Not yet documented	Material, Status		

Breaker family GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00251	**TSSG3A**	Siemens TSSG3A terminal shield, HGG/LGG/NGG 3-pole	HGG, LGG, NGG 3-pole **A**	current

EDH-SIE-00251	TSSG3A	Siemens	barrier	CURRENT

Siemens TSSG3A terminal shield, HGG/LGG/NGG 3-pole

OEM part number	TSSG3A	**A**	S203, S204, S550 s6 p. 7-160; oem_spec
Description	Terminal shield	**A**	S203, S204 s6 p. 7-160; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	HGG, LGG, NGG 3-pole	**A**	same as above
	CQD, NGG, NGB	**A**	S550 pp.1-2; oem_spec
Poles	3-pole	**A**	same as above
Kit contents	std pkg 1	**A**	S203, S204 s6 p. 7-160; oem_spec
Torque values	3.12 lb-in	**A**	S550 pp.1-2; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	S203, S204 s6 p. 7-160; oem_spec
Cross-links	Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', BQD / CQD (incl. BQD6, CQD6), NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Breaker family NGG / HGG / LGG (G-frame bolt-on/lug)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00248	**3TC1GG20**	Siemens 3TC1GG20 lug pack of 3, NGG/HGG/LGG 35-125A	NGG, HGG, LGG 35-125 A **A**	current
EDH-SIE-00246	**3TC1Q1**	Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A	NGG, HGG, LGG 15-30 A **A**	current

EDH-SIE-00248	3TC1GG20	Siemens	lug-kit	CURRENT

Siemens 3TC1GG20 lug pack of 3, NGG/HGG/LGG 35-125A

OEM part number	3TC1GG20	**A**	S203, S204 s6 p. 7-153; oem_spec
Description	Pack of 3 lugs	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	NGG, HGG, LGG 35-125 A	**A**	same as above
Kit contents	pkg of 3; wire range #8-#1/0 AWG Cu / #8-#2/0 AWG Al	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Requires	TNKG3 (EDH-SIE-00249)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00246	3TC1Q1	Siemens	lug-kit	CURRENT

Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A

OEM part number	3TC1Q1	A	S203, S204, S549 s6 p. 7-153; oem_spec
Alternate / superseded numbers	783643502277	A	S549 alias; p.1; oem_spec
Description	Pack of 3 TC1Q1-type lugs for NGG/HGG/LGG 15-30 A	A	S203, S204 s6 p. 7-153; oem_spec
Application	accessory	A	same as above
Breaker compatibility	NGG, HGG, LGG 15-30 A	A	same as above
	NGG frame	A	S549 p.1; oem_spec
Kit contents	pkg of 3; wire range #14-#6 AWG Cu / #12-#6 AWG Al	A	S203, S204 s6 p. 7-153; oem_spec
Torque values	14-10 AWG 35 lb-in [4.0 N-m]; 8 AWG 40 lb-in [4.5 N-m]	A	S549 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-153; oem_spec
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Requires	TNKG3 (EDH-SIE-00249)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00250	**TA6GG04**	Siemens TA6GG04 distribution lug, NGG/HGG/LGG	NGG, HGG, LGG 15-125 A, 1/2/3-pole A	current

EDH-SIE-00250	TA6GG04	Siemens	lug	CURRENT

Siemens TA6GG04 distribution lug, NGG/HGG/LGG

OEM part number	TA6GG04	A	S203, S204, S548 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug; special purpose wire connector, not for general use	A	S203, S204 s6 p. 7-155; oem_spec
Application	accessory	A	same as above
Breaker compatibility	NGG, HGG, LGG 15-125 A, 1/2/3-pole	A	same as above
	Frame NGG; not for general use	A	S548 pp.1-2; oem_spec
Kit contents	1 lug per kit; wire range #6-#4 Al / #14-#4 Cu, 6 wires per lug	A	S203, S204 s6 p. 7-155; oem_spec
Torque values	Mounting 45 lb-in [5 Nm]; wire binding 35 lb-in [4 Nm] (14-4 AWG, #6 AWG 7/19 strand); strip .38-.50 / .75-.88 / 1.25-1.38in	A	S548 pp.1-2; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00532	**FMPG1**	NGG/CQD face mounting plate, 1-pole	NGG and CQD A	unknown
EDH-SIE-00533	**FMPG2**	NGG/CQD face mounting plate, 2-pole	NGG and CQD A	unknown
EDH-SIE-00534	**FMPG3**	NGG/CQD face mounting plate, 3-pole	NGG and CQD A	unknown

EDH-SIE-00532	FMPG1	Siemens	mounting-bracket	STATUS UNKNOWN

NGG/CQD face mounting plate, 1-pole

OEM part number	FMPG1	A	S546 pp.1-4; oem_spec
Breaker compatibility	NGG and CQD	A	same as above
Poles	1-pole	A	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug), BQD / CQD (incl. BQD6, CQD6)		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00533	FMPG2	Siemens	mounting-bracket	STATUS UNKNOWN

NGG/CQD face mounting plate, 2-pole

OEM part number	FMPG2	A	S546 pp.1-4; oem_spec
Breaker compatibility	NGG and CQD	A	same as above
Poles	2-pole	A	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug), BQD / CQD (incl. BQD6, CQD6)		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00534	FMPG3	Siemens	mounting-bracket	STATUS UNKNOWN

NGG/CQD face mounting plate, 3-pole

OEM part number	FMPG3	A	S546 pp.1-4; oem_spec
Breaker compatibility	NGG and CQD	A	same as above
Poles	3-pole	A	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug), BQD / CQD (incl. BQD6, CQD6)		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00249	**TNKG3**	Siemens TNKG3 nut keeper plate (pkg of 3), NGG	NGG, HGG, LGG 15-125 A A	current

EDH-SIE-00249	TNKG3	Siemens	hardware-kit	CURRENT

Siemens TNKG3 nut keeper plate (pkg of 3), NGG

OEM part number	TNKG3	A	S203, S204 s6 p. 7-153; oem_spec
Description	Nut keeper plate; one nut keeper plate is required with each lug on the NGG breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NGG, HGG, LGG 15-125 A	A	same as above
Kit contents	pkg of 3	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00535	**MSKG4**	NGG breaker mounting screw kit	Type NGG (not 1-pole NGG) C	unknown

EDH-SIE-00535	MSKG4	Siemens	fastener	STATUS UNKNOWN

NGG breaker mounting screw kit

OEM part number	MSKG4	C	S547 p.1; oem_spec
Breaker compatibility	Type NGG (not 1-pole NGG)	C	same as above
Kit contents	(4) #6-32 UNC screws	C	same as above
Torque values	8 lb-in [0.9 N-m]	C	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog number read as 'MSKG4' from low-resolution render - verify.*		

Breaker family QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00666	**CCQ225**	QJ frame compression lug kit	I-T-E QJ2, QJH2, QJ2-H **A**	unknown
EDH-SIE-00256	**TA1Q300**	Siemens TA1Q300 3-lug kit, QJ2 (distributor data)	Type QJ, QJ2, QJH2 **A**	unknown
EDH-SIE-00665	**TCIQ250**	QJ frame 1-cavity copper connector (6 AWG-250 kcmil)	I-T-E types QJ, QJ2, QJH2, QJ2-H or HQJ2H; copper cable only **A**	unknown

EDH-SIE-00666	CCQ225	Siemens	lug-kit	STATUS UNKNOWN

QJ frame compression lug kit

OEM part number	CCQ225	**A**	S582 pp.1-2; oem_spec
Description	Compression lug; strip 1-1/8in	**A**	same as above
Breaker compatibility	I-T-E QJ2, QJH2, QJ2-H	**A**	same as above
Cross-links	Breakers: QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Dimensions, Kit contents, Material, Status, Torque values		

EDH-SIE-00256	TA1Q300	Siemens	lug-kit	UNKNOWN

Siemens TA1Q300 3-lug kit, QJ2 (distributor data)

OEM part number	TA1Q300	**A**	S205, S540 p.1; oem_spec
Description	3-lug kit for QJ breakers; accepts Al or Cu, single wire up to 300 kcmil	**C**	S205 distributor
Application	accessory	**C**	same as above
Breaker compatibility	Type QJ, QJ2, QJH2	**A**	S540 p.1; oem_spec
	QJ breakers (QJ2, QJH2, QJ2H, HQJ2H per a search snippet)	**C**	S205 distributor
Kit contents	3 lugs; wire range single wire up to 300 kcmil Al/Cu	**C**	same as above
Torque values	Lug mounting screw 150 in-lb [16.9 N-m] (7/32 internal hex); binding: Cu 6-2 AWG 60 in-lb, 1-1/0 200 in-lb, 2/0-300 MCM 250 in-lb; Al 4-1 AWG 60 in-lb, 1/0 200 in-lb, 2/0-300 MCM 250 in-lb	**A**	S540 p.1; oem_spec
Status	unknown (Not in SPEEDFAX 2017. The QJ2 frame is not in the current catalog.)	**D**	S205 distributor
Cross-links	Breakers: QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		
Open question	*Find an OEM ITE/Siemens table for QJ2 lugs (an older SPEEDFAX of about 1995-2008 or the QJ2 instruction)*		
Open question	*Did TA1Q300 supersede, or is it superseded by, 3TA1QR300?*		

EDH-SIE-00665	TCIQ250	Siemens	lug-kit	STATUS UNKNOWN

QJ frame 1-cavity copper connector (6 AWG-250 kcmil)

OEM part number	TCIQ250	**A**	S581 p.1; oem_spec
Breaker compatibility	I-T-E types QJ, QJ2, QJH2, QJ2-H or HQJ2H; copper cable only	**A**	same as above
Torque values	Mounting screw 150 in-lb (7/32 internal hex); cable set screw (5/16 internal hex): 6 AWG 120 in-lb, 4 AWG 200 in-lb, 3 AWG-250 kcmil 250 in-lb; strip 13/16in	**A**	same as above
Identification features	Supplied torque label to be placed over TA1Q300 torque information	**A**	same as above
Cross-links	Breakers: QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Breaker family QR2 / QRH2 / HQR2 (250A frame)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00253	**3TA1QR300**	Siemens 3TA1QR300 lug kit (3), QR2 100-250A	QR2, QR2H, HQR2, HQR2H 100-250 A **A**	current
EDH-SIE-00254	**3TC1QR250**	Siemens 3TC1QR250 copper lug kit (3), QR2	QR2, QR2H, HQR2, HQR2H 100-250 A **A**	current
EDH-SIE-00525	**TA1QR300**	QR frame wire connector (single, Cu/Al)	Frame QR (QR2/QRH2/HQR2) **A**	unknown
EDH-SIE-00526	**TC1QR250**	QR frame wire connector (single, Cu only)	Frame QR (QR2/QRH2/HQR2) **A**	unknown

EDH-SIE-00253	3TA1QR300	Siemens	lug-kit	CURRENT

Siemens 3TA1QR300 lug kit (3), QR2 100-250A

OEM part number	3TA1QR300	**A**	S203, S204, S542 s6 p. 7-40; s6 p. 7-154; oem_spec
Description	Aluminum-body lugs, 3 per kit; load-side lugs mounted and included with QR2 (line+load with suffix 'L')	**A**	S203, S204 s6 p. 7-40; s6 p. 7-154; oem_spec
	Wire connector 3-pole set, Cu/Al, 3 AWG-300 kcmil (UL 486A-486B stranding: 7/19 strands for 3-2 AWG ... 37/61 for 250-300 kcmil)	**A**	S542 pp.1-3; oem_spec
Application	accessory	**A**	S203, S204 s6 p. 7-40; s6 p. 7-154; oem_spec
Breaker compatibility	QR2, QR2H, HQR2, HQR2H 100-250 A	**A**	same as above
	Frame QR (QR2/QRH2/HQR2)	**A**	S542 pp.1-3; oem_spec
Kit contents	3 lugs; wire range #3-300 kcmil Al/Cu	**A**	S203, S204 s6 p. 7-40; s6 p. 7-154; oem_spec
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Torque values	3 AWG-1/0 AWG 100 lb-in [11.3 N-m]; 2/0 AWG-300 kcmil 225 lb-in [25.4 N-m]; strip 23 mm	**A**	S542 pp.1-3; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	S203, S204 s6 p. 7-40; s6 p. 7-154; oem_spec
Cross-links	Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

EDH-SIE-00254	3TC1QR250	Siemens	lug-kit	CURRENT

Siemens 3TC1QR250 copper lug kit (3), QR2

OEM part number	3TC1QR250	A	S203, S204, S542 s6 p. 7-40; s6 p. 7-155; oem_spec
Alternate / superseded numbers	3TC1QR2520 (Printed '3TC1QR2520' on p. 7-155 but '3TC1QR250' on p. 7-40. It may be a footnote run-in or a typo.)	B	S203 alias; s6 p. 7-155; oem_spec
Description	Optional copper lugs, 3 per kit	A	S203, S204 s6 p. 7-40; s6 p. 7-155; oem_spec
	Wire connector 3-pole set, Cu only, 3 AWG-300 kcmil (UL 486A-486B stranding: 7/19 strands for 3-2 AWG ... 37/61 for 250-300 kcmil)	A	S542 pp.1-3; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-40; s6 p. 7-155; oem_spec
Breaker compatibility	QR2, QR2H, HQR2, HQR2H 100-250 A	A	same as above
	Frame QR (QR2/QRH2/HQR2)	A	S542 pp.1-3; oem_spec
Kit contents	3 lugs; wire range #3-300 kcmil Cu only	A	S203, S204 s6 p. 7-40; s6 p. 7-155; oem_spec
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Torque values	3 AWG-1/0 AWG 100 lb-in [11.3 N-m]; 2/0 AWG-300 kcmil 225 lb-in [25.4 N-m]; strip 23 mm	A	S542 pp.1-3; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-40; s6 p. 7-155; oem_spec
Cross-links	Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		
Open question	*Which is the correct orderable number, 3TC1QR250 or 3TC1QR2520?*		
Open question	*Sheet table header reads 2/0 AWG-300 kcmil for TC1QR250 although part number implies 250 kcmil; verify.*		

EDH-SIE-00525	TA1QR300	Siemens	lug-kit	STATUS UNKNOWN

QR frame wire connector (single, Cu/Al)

OEM part number	TA1QR300	A	S542 pp.1-3; oem_spec
Description	Wire connector single, Cu/Al (UL 486A-486B stranding: 7/19 strands for 3-2 AWG ... 37/61 for 250-300 kcmil)	A	same as above
Breaker compatibility	Frame QR (QR2/QRH2/HQR2)	A	same as above
Torque values	3 AWG-1/0 AWG 100 lb-in [11.3 N-m]; 2/0 AWG-300 kcmil 225 lb-in [25.4 N-m]; strip 23 mm	A	same as above
Cross-links	Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00526	TC1QR250	Siemens	lug-kit	STATUS UNKNOWN

QR frame wire connector (single, Cu only)

OEM part number	TC1QR250	A	S542 pp.1-3; oem_spec
Description	Wire connector single, Cu only (UL 486A-486B stranding: 7/19 strands for 3-2 AWG ... 37/61 for 250-300 kcmil)	A	same as above
Breaker compatibility	Frame QR (QR2/QRH2/HQR2)	A	same as above
Torque values	3 AWG-1/0 AWG 100 lb-in [11.3 N-m]; 2/0 AWG-300 kcmil 225 lb-in [25.4 N-m]; strip 23 mm	A	same as above
Cross-links	Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Dimensions, Kit contents, Material, Status		
Open question	*Sheet table header reads 2/0 AWG-300 kcmil for TC1QR250 although part number implies 250 kcmil; verify.*		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00255	**CCQ250**	Siemens CCQ250 compression lug, QR2	QR2, QR2H, HQR2, HQR2H 100-250 A, 2-3 pole A	current

EDH-SIE-00255	CCQ250	Siemens	lug	CURRENT

Siemens CCQ250 compression lug, QR2

OEM part number	CCQ250	A	S203, S204, S541 s6 p. 7-155; oem_spec
Description	Compression lug (lug and necessary hardware per kit)	A	S203, S204 s6 p. 7-155; oem_spec
	Compression lug; dies incl. 350 kcmil Burndy Y-35, T&B TBM15 76 (2 crimps), Hubbell/Anderson VC-6 1 crimp (6-2 AWG ... 250-350 kcmil)	A	S541 pp.1-3; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-155; oem_spec
Breaker compatibility	QR2, QR2H, HQR2, HQR2H 100-250 A, 2-3 pole	A	same as above
	Frame QR	A	S541 pp.1-3; oem_spec
Kit contents	1 lug per kit; wire range #6-350 kcmil Al/Cu	A	S203, S204 s6 p. 7-155; oem_spec
Material	{'value': 'Compression (CMP)', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 'p. 7-40'}	A	same as above
Torque values	Lug mounting 175 lb-in [19.8 N-m]	A	S541 pp.1-3; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00527	**MSQR3**	QR frame breaker mounting screw kit	QR frame A	unknown

EDH-SIE-00527	MSQR3	Siemens	fastener	STATUS UNKNOWN

QR frame breaker mounting screw kit

OEM part number	MSQR3	A	S543 p.1; oem_spec
Application	2-pole uses 2 screws, 3-pole uses 4 screws	A	same as above
Breaker compatibility	QR frame	A	same as above
Torque values	24 lb-in [2.7 N-m]	A	same as above
Cross-links	Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Breaker family Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00263	**CCE125**	Siemens CCE125 compression lug, ED 15-125A	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A, 1/2/3-pole A	current
EDH-SIE-00260	**LD1E060**	Siemens LD1E060 load-side lug, ED 1-pole 30-60A	ED, HED 1-pole 30-60 A; CED6 A	current
EDH-SIE-00261	**LD1E100**	Siemens LD1E100 load-side lug, ED 1-pole 70-100A	ED, HED 1-pole 70-100 A A	current
EDH-SIE-00258	**LN1E100**	Siemens LN1E100 lug, ED 30-100A	ED2, ED4, ED6, ED6 ETI, HED4, HHED6 30-100 A A	current
EDH-SIE-00257	**SA1E025**	Siemens SA1E025 lug, ED 2/3-pole 15-25A	ED2, ED4, ED6, HED4, HHED6 (all 2-, 3-pole) 15-25 A A	current
EDH-SIE-00259	**TA1E6125**	Siemens TA1E6125 lug, ED 110-125A	ED/HED/HHED 110-125 A, 2- and 3-pole A	current
EDH-SIE-00264	**TA6ED06**	Siemens TA6ED06 distribution lug, ED	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A A	current
EDH-SIE-00262	**TC1ED6150**	Siemens TC1ED6150 copper-body lug, ED 30-125A	ED, HED 1-, 2-, 3-pole 30-125 A A	current

EDH-SIE-00263	CCE125	Siemens	lug	CURRENT

Siemens CCE125 compression lug, ED 15-125A

OEM part number	CCE125	A	S203, S204, S501 s6 p. 7-155; oem_spec
Description	Compression lug	A	S203, S204 s6 p. 7-155; oem_spec
	Crimp compression connector with insulating cover; strip 13/16in; crimp dies: 2/0 Homac UT-5 TWTY (2 crimps) / UT-15 die 58 (1), Burndy Y-35 U245 (1), T&B TBM-15 die 60 (1); #14-2/0 Square D VC-6 (1)	A	S501 pp.1-2; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-155; oem_spec
Breaker compatibility	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A, 1/2/3-pole	A	same as above
	ED6, (H)ED4, (H)ED6, ED6(-A)(ETI), CED6, CED6(-A)(ETI), HHED6, (H)ED4(ETI), (H)ED6(ETI), ED2Y, EM6	A	S501 pp.1-2; oem_spec
Kit contents	1 lug per kit; wire range #2/0 AWG Cu/Al	A	S203, S204 s6 p. 7-155; oem_spec
Torque values	Tang to breaker terminal: 1/4-28x1/2 socket head cap screw + conical spring washer (convex toward screw head) 50 in-lb	A	S501 pp.1-2; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-SIE-00260	LD1E060	Siemens	lug	CURRENT

Siemens LD1E060 load-side lug, ED 1-pole 30-60A

OEM part number	LD1E060	A	S203, S204, S498 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Alternate / superseded numbers	LD1-E060	A	S498 alias; p.1; oem_spec
Description	Load-side lug	A	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Application	accessory	A	same as above
Installation location	Load side	A	S203 s6 p. 7-154; oem_spec
Breaker compatibility	ED, HED 1-pole 30-60 A; CED6	A	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
	E2, (H)E4, (H)E6, ED2(Y), (H)ED4, (H)ED6, HHED6, CED6(ETI), FFC, FFF (load side)	A	S498 p.1; oem_spec
Kit contents	1 lug; wire range #10-#4 Cu/Al	A	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Torque values	#10 CU/AL 30 in-lb; #8 36 in-lb; #6-4 45 in-lb	A	S498 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-SIE-00261	LD1E100	Siemens	lug	CURRENT

Siemens LD1E100 load-side lug, ED 1-pole 70-100A

OEM part number	LD1E100	A	S203, S204, S500 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Alternate / superseded numbers	LD1-E100	A	S500 alias; p.1; oem_spec
Description	Load-side lug	A	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Application	accessory	A	same as above
Installation location	Load side	A	S203 s6 p. 7-154; oem_spec
Breaker compatibility	ED, HED 1-pole 70-100 A	A	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
	E2, (H)E4, (H)E6, ED2(Y), (H)ED4, (H)ED6, HHED6, CED6(ETI), FFC, FFF (load side)	A	S500 p.1; oem_spec
Kit contents	1 lug; wire range #4-#1/0 Cu/Al (ED page: #6-#1/0)	A	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Torque values	#4 45 in-lb; #3 50 in-lb; 1/0-2 60 in-lb (CU or AL)	A	S500 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-SIE-00258	LN1E100	Siemens	lug	CURRENT

Siemens LN1E100 lug, ED 30-100A

OEM part number	LN1E100	A	S203, S204, S499 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Alternate / superseded numbers	LN1-E100	A	S499 alias; p.1; oem_spec
Description	Aluminum-body lug, line side (all poles) and load side (2/3-pole)	A	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, ED6 ETI, HED4, HHED6 30-100 A	A	same as above
	Line side: E2, (H)E4, (H)E6, CLE(-A)(ETI), CED6(ETI) 1/2/3-pole; ED2(Y), (H)ED4, (H)ED6 1-pole. Line & load: E2-A, (H)E4-A, (H)E6-A(ETI), ED2(Y), (H)ED4, (H)ED6(ETI) 2/3-pole; EFC, EFF 3-pole	A	S499 p.1; oem_spec
Kit contents	1 lug; wire range #10-1/0 Cu/Al	A	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Torque values	#10 30 in-lb [2.26 N-m]; #8 36 in-lb; #6-4 45 in-lb; #3 50 in-lb; 1/0-2 60 in-lb [6.78 N-m] (CU or AL)	A	S499 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

EDH-SIE-00257	SA1E025	Siemens	lug	CURRENT

Siemens SA1E025 lug, ED 2/3-pole 15-25A

OEM part number	SA1E025	A	S203, S204, S497 s6 p. 7-154; oem_spec
Alternate / superseded numbers	SA1-E025	A	S497 alias; p.1; oem_spec
Description	Lug	A	S203, S204 s6 p. 7-154; oem_spec
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, HED4, HHED6 (all 2-, 3-pole) 15-25 A	A	same as above
	E2(-A), (H)E4(-A), (H)E6(-A)(ETI), CLE(-A)(ETI), ED2(Y), (H)ED4, (H)ED6(ETI), CED6(ETI), EFC, EFF, EM6, EMK	A	S497 p.1; oem_spec
Kit contents	1 lug; wire range #14-#10 AWG Cu / #12-#10 AWG Al	A	S203, S204 s6 p. 7-154; oem_spec
	Saddle and screw fastened to breaker terminal	A	S497 p.1; oem_spec
Torque values	Saddle screw 32 in-lb [3.6 N-m]	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-154; oem_spec
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-SIE-00259	TA1E6125	Siemens	lug	CURRENT

Siemens TA1E6125 lug, ED 110-125A

OEM part number	TA1E6125	A	S203, S204, S496 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Aluminum-body line/load lug	A	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Application	accessory	A	same as above
Breaker compatibility	ED/HED/HHED 110-125 A, 2- and 3-pole	A	same as above
	(H)E4-A, (H)E6-A(ETI), (H)ED4, HHED6, (H)ED6(ETI), CED6(ETI), EFC, EFF, EM6, EMK - line side & load side	A	S496 p.1; oem_spec
Kit contents	1 lug; wire range #3-3/0 Cu / #1-2/0 Al	A	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Torque values	Binding screw: 3/0-3 CU or AL 80 in-lb [9.04 N-m]; 2/0-2 CU or AL 80 in-lb	A	S496 p.1; oem_spec
OEM instruction document	Pc. No. 64900A02	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Identification features	Terminal assembly with binding screw, 'O'-ring wire-lug retainer; open binding screw 1/2in min before mounting	A	S496 p.1; oem_spec
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern		

EDH-SIE-00264	TA6ED06	Siemens	lug	CURRENT

Siemens TA6ED06 distribution lug, ED

OEM part number	TA6ED06	A	S203, S204, S578 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug; special purpose wire connector	A	S203, S204 s6 p. 7-155; oem_spec
Application	accessory	A	same as above
	Special purpose wire connector, not for general use	A	S578 p.1; oem_spec
Breaker compatibility	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A	A	S203, S204 s6 p. 7-155; oem_spec
	ED2, ED4, ED6, HED4, HHED6, CED6, EM6, EMK (HHED6 top side only)	A	S578 p.1; oem_spec
Kit contents	1 lug per kit; wire range #14-#4 AWG Cu / #6-#4 AWG Al, 6 wires	A	S203, S204 s6 p. 7-155; oem_spec
Torque values	Connector mounting screw 50 lb-in [5.65 N-m]; binding screws 35 lb-in [3.95 N-m] (14-10 AWG Cu, 8-4 AWG Cu, 6-4 AWG Al)	A	S578 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-SIE-00262	TC1ED6150	Siemens	lug	CURRENT

Siemens TC1ED6150 copper-body lug, ED 30-125A

OEM part number	TC1ED6150	A	S203, S204 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-155; oem_spec
Description	Optional copper-body mechanical lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED, HED 1-, 2-, 3-pole 30-125 A	A	same as above
Kit contents	1 lug; wire range #10-#1/0 Cu only	A	same as above
Material	{'value': 'Copper body', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00472	**PC2637**	E/ED/CLE frame plug-in mounting assembly, 2-pole, line end	Siemens E, ED, EM and EF frame (incl. CLE) breakers A	unknown
EDH-SIE-00473	**PC2638**	E/ED/CLE frame plug-in mounting assembly, 2-pole, load end	Siemens E, ED, EM and EF frame (incl. CLE) breakers A	unknown
EDH-SIE-00474	**PC2657**	E/ED/CLE frame plug-in mounting assembly, 3-pole, line end	Siemens E, ED, EM and EF frame (incl. CLE) breakers A	unknown
EDH-SIE-00475	**PC2658**	E/ED/CLE frame plug-in mounting assembly, 3-pole, load end	Siemens E, ED, EM and EF frame (incl. CLE) breakers A	unknown
EDH-SIE-00476	**PM2657**	E/ED/CLE frame plug-in mounting assembly, 3-pole, line end	Siemens E, ED, EM and EF frame (incl. CLE) breakers A	unknown
EDH-SIE-00477	**PM2658**	E/ED/CLE frame plug-in mounting assembly, 3-pole, load end	Siemens E, ED, EM and EF frame (incl. CLE) breakers A	unknown
EDH-SIE-00478	**TCE2**	E/CLE frame replacement plug-in (tulip) adapter, 2-pole	Siemens E, ED, EM and EF frame breakers used with plug-in mounting ass A	unknown
EDH-SIE-00479	**TCE3**	E/CLE frame replacement plug-in (tulip) adapter, 3-pole	Siemens E, ED, EM and EF frame breakers used with plug-in mounting ass A	unknown

EDH-SIE-00472	PC2637	Siemens	breaker-mounting-kit	STATUS UNKNOWN

E/ED/CLE frame plug-in mounting assembly, 2-pole, line end

OEM part number	PC2637	A	S504 p.1 table; oem_spec
Description	Plug-in mounting assembly (line end); switchboard catalog nos. PL2616 (line) / PL2617 (load) listed in same table	A	same as above
Breaker compatibility	Siemens E, ED, EM and EF frame (incl. CLE) breakers	A	same as above
Poles	2-pole	A	same as above
Torque values	Stud nut (item 15) 35 +/-2 in-lb [3.95 N-m] (hold nut under bus with wrench); breaker terminal screws 2-1/2 to 3 ft-lb [3.39-4.07 N-m]	A	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00473	PC2638	Siemens	breaker-mounting-kit	STATUS UNKNOWN

E/ED/CLE frame plug-in mounting assembly, 2-pole, load end

OEM part number	PC2638	A	S504 p.1 table; oem_spec
Description	Plug-in mounting assembly (load end); switchboard catalog nos. PL2616 (line) / PL2617 (load) listed in same table	A	same as above
Breaker compatibility	Siemens E, ED, EM and EF frame (incl. CLE) breakers	A	same as above
Poles	2-pole	A	same as above
Torque values	Stud nut (item 15) 35 +/-2 in-lb [3.95 N-m] (hold nut under bus with wrench); breaker terminal screws 2-1/2 to 3 ft-lb [3.39-4.07 N-m]	A	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00474	PC2657	Siemens	breaker-mounting-kit	STATUS UNKNOWN

E/ED/CLE frame plug-in mounting assembly, 3-pole, line end

OEM part number	PC2657	A	S504 p.1 table; oem_spec
Description	Plug-in mounting assembly (line end); switchboard catalog nos. PL2616 (line) / PL2617 (load) listed in same table	A	same as above
Breaker compatibility	Siemens E, ED, EM and EF frame (incl. CLE) breakers	A	same as above
Poles	3-pole	A	same as above
Torque values	Stud nut (item 15) 35 +/-2 in-lb [3.95 N-m] (hold nut under bus with wrench); breaker terminal screws 2-1/2 to 3 ft-lb [3.39-4.07 N-m]	A	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00475	PC2658	Siemens	breaker-mounting-kit	STATUS UNKNOWN

E/ED/CLE frame plug-in mounting assembly, 3-pole, load end

OEM part number	PC2658	A	S504 p.1 table; oem_spec
Description	Plug-in mounting assembly (load end); switchboard catalog nos. PL2616 (line) / PL2617 (load) listed in same table	A	same as above
Breaker compatibility	Siemens E, ED, EM and EF frame (incl. CLE) breakers	A	same as above
Poles	3-pole	A	same as above
Torque values	Stud nut (item 15) 35 +/-2 in-lb [3.95 N-m] (hold nut under bus with wrench); breaker terminal screws 2-1/2 to 3 ft-lb [3.39-4.07 N-m]	A	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00476	PM2657	Siemens	breaker-mounting-kit	STATUS UNKNOWN

E/ED/CLE frame plug-in mounting assembly, 3-pole, line end

OEM part number	PM2657	A	S504 p.1 table; oem_spec
Description	Plug-in mounting assembly (line end); switchboard catalog nos. PL2616 (line) / PL2617 (load) listed in same table	A	same as above
Breaker compatibility	Siemens E, ED, EM and EF frame (incl. CLE) breakers	A	same as above
Poles	3-pole	A	same as above
Torque values	Stud nut (item 15) 35 +/-2 in-lb [3.95 N-m] (hold nut under bus with wrench); breaker terminal screws 2-1/2 to 3 ft-lb [3.39-4.07 N-m]	A	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00477	PM2658	Siemens	breaker-mounting-kit	STATUS UNKNOWN

E/ED/CLE frame plug-in mounting assembly, 3-pole, load end

OEM part number	PM2658	A	S504 p.1 table; oem_spec
Description	Plug-in mounting assembly (load end); switchboard catalog nos. PL2616 (line) / PL2617 (load) listed in same table	A	same as above
Breaker compatibility	Siemens E, ED, EM and EF frame (incl. CLE) breakers	A	same as above
Poles	3-pole	A	same as above
Torque values	Stud nut (item 15) 35 +/-2 in-lb [3.95 N-m] (hold nut under bus with wrench); breaker terminal screws 2-1/2 to 3 ft-lb [3.39-4.07 N-m]	A	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00478	TCE2	Siemens	breaker-mounting-kit	STATUS UNKNOWN

E/CLE frame replacement plug-in (tulip) adapter, 2-pole

OEM part number	TCE2	A	S505 p.1; oem_spec
Breaker compatibility	Siemens E, ED, EM and EF frame breakers used with plug-in mounting assemblies PC2637/PC2638, PC2657/PC2658 or PM2657/PM2658	A	same as above
Poles	2-pole	A	same as above
Torque values	2-1/2 to 3 ft-lb [3.39-4.07 N-m]	A	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00479	TCE3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

E/CLE frame replacement plug-in (tulip) adapter, 3-pole

OEM part number	TCE3	A	S505 p.1; oem_spec
Breaker compatibility	Siemens E, ED, EM and EF frame breakers used with plug-in mounting assemblies PC2637/PC2638, PC2657/PC2658 or PM2657/PM2658	A	same as above
Poles	3-pole	A	same as above
Torque values	2-1/2 to 3 ft-lb [3.39-4.07 N-m]	A	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00471	**MSE6-100**	E/ED frame breaker mounting screw kit	E2(-A), (H)E4(-A), (H)E6(-A)(ETI), CLE(-A)(ETI), ED2(Y), (H)ED4, (H)ED **A**	unknown

EDH-SIE-00471	MSE6-100	Siemens	fastener	STATUS UNKNOWN

E/ED frame breaker mounting screw kit

OEM part number	MSE6-100	A	S502 p.1; oem_spec
Alternate / superseded numbers	MSE6100 [alias]	A	same as above
Application	Breakers without add-on interrupter need 2 screws in I-T-E E-frame enclosure, 4 screws for other mounting; CLE and CED6 (with interrupter) need 6 screws	A	same as above
Breaker compatibility	E2(-A), (H)E4(-A), (H)E6(-A)(ETI), CLE(-A)(ETI), ED2(Y), (H)ED4, (H)ED6(ETI), CED6(ETI)	A	same as above
Kit contents	8-32 x 4.06in screws with 3/8 OD x 13/64 ID x .044/.052 thick flat washers	A	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Dimensions, Material, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00301	**RS2641**	Siemens RS2641 rear-connecting stud, All ED, line side (long) 4.88 in	All ED (100 A) A	current
EDH-SIE-00302	**RS2642**	Siemens RS2642 rear-connecting stud, All ED, load side (long) 4.88 in	All ED (100 A) A	current
EDH-SIE-00299	**RS2643**	Siemens RS2643 rear-connecting stud, All ED, line side (short) 2.38 in	All ED (100 A) A	current
EDH-SIE-00300	**RS2644**	Siemens RS2644 rear-connecting stud, All ED, load side (short) 2.38 in	All ED (100 A) A	current

EDH-SIE-00301	RS2641	Siemens	breaker-accessory	CURRENT

Siemens RS2641 rear-connecting stud, All ED, line side (long) 4.88 in

OEM part number	RS2641	A	S203, S204, S503 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Line side (long). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
	E2(-A), E4(-A), E6(-A), HE4(-A), HE6(-A), CLE(-A), ED2, ED4, ED6, HED4, HED6, CED6, EFF, EFC	A	S503 p.1; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
Dimensions	Extension behind breaker 4.88 in	A	S203 p. 7-165; oem_spec
	Stud 6.00in [152.4] long; 3.50in [88.9] / 1.00in; mounting dims A/B: E-frame 6.33/5.03in, CLE 9.58/8.28in	A	S503 p.1; oem_spec
Fasteners	#12-24 screws, #12 lockwashers, #12 flatwashers; (2) 3/8-16 silver-finished brass nuts on threaded end of each stud	A	same as above
Torque values	Stud to breaker terminal (#12-24 screw, #12 lock & flat washer) 108-120 lb-in; line shield screws 24 lb-in	A	same as above
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Mounting-hole pattern, Identification features, Material		
Open question	*Sheet does not tabulate which of RS2641-RS2644 is line vs load / pole count; see Fig. 1-3 or SPEEDFAX.*		

EDH-SIE-00302	RS2642	Siemens	breaker-accessory	CURRENT

Siemens RS2642 rear-connecting stud, All ED, load side (long) 4.88 in

OEM part number	RS2642	A	S203, S204, S503 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Load side (long). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
	E2(-A), E4(-A), E6(-A), HE4(-A), HE6(-A), CLE(-A), ED2, ED4, ED6, HED4, HED6, CED6, EFF, EFC	A	S503 p.1; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
Dimensions	Extension behind breaker 4.88 in	A	S203 p. 7-165; oem_spec
	Stud 6.00in [152.4] long; 3.50in [88.9] / 1.00in; mounting dims A/B: E-frame 6.33/5.03in, CLE 9.58/8.28in	A	S503 p.1; oem_spec
Fasteners	#12-24 screws, #12 lockwashers, #12 flatwashers; (2) 3/8-16 silver-finished brass nuts on threaded end of each stud	A	same as above
Torque values	Stud to breaker terminal (#12-24 screw, #12 lock & flat washer) 108-120 lb-in; line shield screws 24 lb-in	A	same as above
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Mounting-hole pattern, Identification features, Material		
Open question	*Sheet does not tabulate which of RS2641-RS2644 is line vs load / pole count; see Fig. 1-3 or SPEEDFAX.*		

EDH-SIE-00299	RS2643	Siemens	breaker-accessory	CURRENT

Siemens RS2643 rear-connecting stud, All ED, line side (short) 2.38 in

OEM part number	RS2643	A	S203, S204, S503 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Line side (short). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
	E2(-A), E4(-A), E6(-A), HE4(-A), HE6(-A), CLE(-A), ED2, ED4, ED6, HED4, HED6, CED6, EFF, EFC	A	S503 p.1; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
Dimensions	Extension behind breaker 2.38 in	A	S203 p. 7-165; oem_spec
	Stud 6.00in [152.4] long; 3.50in [88.9] / 1.00in; mounting dims A/B: E-frame 6.33/5.03in, CLE 9.58/8.28in	A	S503 p.1; oem_spec
Fasteners	#12-24 screws, #12 lockwashers, #12 flatwashers; (2) 3/8-16 silver-finished brass nuts on threaded end of each stud	A	same as above
Torque values	Stud to breaker terminal (#12-24 screw, #12 lock & flat washer) 108-120 lb-in; line shield screws 24 lb-in	A	same as above
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Mounting-hole pattern, Identification features, Material		
Open question	*Sheet does not tabulate which of RS2641-RS2644 is line vs load / pole count; see Fig. 1-3 or SPEEDFAX.*		

EDH-SIE-00300	RS2644	Siemens	breaker-accessory	CURRENT

Siemens RS2644 rear-connecting stud, All ED, load side (short) 2.38 in

OEM part number	RS2644	A	S203, S204, S503 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Load side (short). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
	E2(-A), E4(-A), E6(-A), HE4(-A), HE6(-A), CLE(-A), ED2, ED4, ED6, HED4, HED6, CED6, EFF, EFC	A	S503 p.1; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
Dimensions	Extension behind breaker 2.38 in	A	S203 p. 7-165; oem_spec
	Stud 6.00in [152.4] long; 3.50in [88.9] / 1.00in; mounting dims A/B: E-frame 6.33/5.03in, CLE 9.58/8.28in	A	S503 p.1; oem_spec
Fasteners	#12-24 screws, #12 lockwashers, #12 flatwashers; (2) 3/8-16 silver-finished brass nuts on threaded end of each stud	A	same as above
Torque values	Stud to breaker terminal (#12-24 screw, #12 lock & flat washer) 108-120 lb-in; line shield screws 24 lb-in	A	same as above
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Mounting-hole pattern, Identification features, Material		
Open question	*Sheet does not tabulate which of RS2641-RS2644 is line vs load / pole count; see Fig. 1-3 or SPEEDFAX.*		

Breaker family Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00267	**CCF250**	Siemens CCF250 compression lug, FD	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 125-250 A, 2/3-pole A	current
EDH-SIE-00265	**TA1FD350A**	Siemens TA1FD350A lug, FD 70-250A	FXD6-A, FD6-A, HFD6, HHFD6, CFD6 70-250 A A	current
EDH-SIE-00268	**TA6FD04**	Siemens TA6FD04 distribution lug, FD	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 70-250 A, 2/3-pole A	current
EDH-SIE-00266	**TC1FD350**	Siemens TC1FD350 copper lug, FD 70-250A	HFD6, HHFD6, CFD6, F(X)D6-A 70-250 A A	current

EDH-SIE-00267	CCF250	Siemens	lug	CURRENT

Siemens CCF250 compression lug, FD

OEM part number	CCF250	A	S203, S204, S511 s6 p. 7-155; oem_spec
Description	Compression lug	A	S203, S204 s6 p. 7-155; oem_spec
	Crimp compression connector; dies for 350 kcmil: Homac UT-5 TX (6 crimps), Burndy Y-35 658/U29ART (2), Kearny WH-2 840 (4), T&B TBM-15 76 (2); #6-350 kcmil Square D VC-6 (1)	A	S511 pp.1-2; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-155; oem_spec
Breaker compatibility	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 125-250 A, 2/3-pole	A	same as above
	FD6, FD6-A, FXD6(ETI), FXD6-A, HFD6, HHFD6, HHFXD6, CFD6(ETI), FM6, FMK	A	S511 pp.1-2; oem_spec
Kit contents	1 lug per kit; wire range 350 kcmil Cu/Al	A	S203, S204 s6 p. 7-155; oem_spec
Torque values	Tang socket head cap screw with conical spring washer 175 in-lb	A	S511 pp.1-2; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-SIE-00265	TA1FD350A	Siemens	lug	CURRENT

Siemens TA1FD350A lug, FD 70-250A

OEM part number	TA1FD350A	A	S203, S204, S507 s6 FD page; s6 p. 7-154; oem_spec
Description	Standard aluminum-body line/load lug; supplied with FD6/HFD6/HHFD6 complete breakers. Suffix 'L' = lugs installed.	A	S203, S204 s6 FD page; s6 p. 7-154; oem_spec
Application	accessory	A	same as above
Breaker compatibility	FXD6-A, FD6-A, HFD6, HHFD6, CFD6 70-250 A	A	same as above
	FD6, FD6-A, HFD6, HHFD6, FXD6, FXD6-A, CFD6, FFC, FFF, FM6, FMK (one line or load connection per kit)	A	S507 p.1; oem_spec
Kit contents	1 lug; wire range #6 AWG-350 kcmil Cu / #4 AWG-350 kcmil Al	A	S203, S204 s6 FD page; s6 p. 7-154; oem_spec
	1 solderless connector + hardware	A	S507 p.1; oem_spec
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	S203, S204 s6 FD page; s6 p. 7-154; oem_spec
Torque values	Mounting screw 150 lb-in [16.95 N-m]; binding screw 6-2 AWG 120 lb-in, 1 AWG 120 lb-in, 1/0-350 kcmil 275 lb-in [31.07 N-m]; strip 0.9in [23 mm]	A	S507 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 FD page; s6 p. 7-154; oem_spec
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

EDH-SIE-00268	TA6FD04	Siemens	lug	CURRENT

Siemens TA6FD04 distribution lug, FD

OEM part number	TA6FD04	A	S203, S204, S506 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug	A	S203, S204 s6 p. 7-155; oem_spec
Application	accessory	A	same as above
	Special purpose - not for general use; for OEM use only. Trip unit must be installed before connector	A	S506 p.1; oem_spec
Breaker compatibility	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 70-250 A, 2/3-pole	A	S203, S204 s6 p. 7-155; oem_spec
	FD6(-A), FXD6-A, (H)HFD6, (H)(H)FXD6, CFD6	A	S506 p.1; oem_spec
Kit contents	1 lug per kit; wire range #14-#4 AWG Cu / #6-#4 AWG Al, 6 wires	A	S203, S204 s6 p. 7-155; oem_spec
	Solderless connector, insulator shield and associated hardware	A	S506 p.1; oem_spec
Torque values	Connector mounting screw 275 lb-in [31 N-m]; binding screws 35 lb-in [3.95 N-m] (14-10 AWG Cu, 8-4 AWG Cu, 6-4 AWG Al)	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-SIE-00266	TC1FD350	Siemens	lug	CURRENT

Siemens TC1FD350 copper lug, FD 70-250A

OEM part number	TC1FD350	A	S203, S204, S508 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug	A	S203, S204 s6 p. 7-155; oem_spec
Application	accessory	A	same as above
Breaker compatibility	HFD6, HHFD6, CFD6, F(X)D6-A 70-250 A	A	same as above
	F(J)6, HF6, CLF, FD6(-A), (H)HFD6, (H)(H)FXD6, FXD6-A, CFD6, FFC, FFF, FM6, FMK	A	S508 p.1; oem_spec
Kit contents	1 lug; wire range #6 AWG-350 kcmil Cu	A	S203, S204 s6 p. 7-155; oem_spec
	1 solderless connector + hardware (CU only, #6-350 kcmil)	A	S508 p.1; oem_spec
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	S203, S204 s6 p. 7-155; oem_spec
Torque values	Mounting screw 275 in-lb [31.07 N-m]; binding screw #6-#1 120 in-lb, 1/0-350 kcmil 275 in-lb	A	S508 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00481	**PC4753**	F/FD frame plug-in mounting assembly, 2-pole	Siemens F, FD, FM and FF frame A	unknown
EDH-SIE-00482	**PC4754**	F/FD frame plug-in mounting assembly, 3-pole	Siemens F, FD, FM and FF frame A	unknown
EDH-SIE-00483	**PM4754**	F/FD frame plug-in mounting assembly, 3-pole	Siemens F, FD, FM and FF frame A	unknown
EDH-SIE-00484	**TCF2**	FD frame replacement plug-in tulip adapter, 2-pole	FD frame breakers used with plug-in mounting assemblies PC4753, PC4754 A	unknown
EDH-SIE-00485	**TCF3**	FD frame replacement plug-in tulip adapter, 3-pole	FD frame breakers used with plug-in mounting assemblies PC4753, PC4754 A	unknown

EDH-SIE-00481	PC4753	Siemens	breaker-mounting-kit	STATUS UNKNOWN

F/FD frame plug-in mounting assembly, 2-pole

OEM part number	PC4753	A	S512 p.1 table; oem_spec
Description	Plug-in mounting assembly (same cat. no. line and load end); switchboard cat. nos. PL4762 / PL4763 listed	A	same as above
Breaker compatibility	Siemens F, FD, FM and FF frame	A	same as above
Poles	2-pole	A	same as above
Torque values	Breaker to tulip clip assemblies: 5/16-18x1-1/2 round head screws 5-6 ft-lb [6.78-8.13 N-m] (2in screws on load side of CLF/CFD); 1/2-13 studs 35 ft-lb (Fig. 5)	A	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00482	PC4754	Siemens	breaker-mounting-kit	STATUS UNKNOWN

F/FD frame plug-in mounting assembly, 3-pole

OEM part number	PC4754	A	S512 p.1 table; oem_spec
Description	Plug-in mounting assembly (same cat. no. line and load end); switchboard cat. nos. PL4762 / PL4763 listed	A	same as above
Breaker compatibility	Siemens F, FD, FM and FF frame	A	same as above
Poles	3-pole	A	same as above
Torque values	Breaker to tulip clip assemblies: 5/16-18x1-1/2 round head screws 5-6 ft-lb [6.78-8.13 N-m] (2in screws on load side of CLF/CFD); 1/2-13 studs 35 ft-lb (Fig. 5)	A	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00483	PM4754	Siemens	breaker-mounting-kit	STATUS UNKNOWN

F/FD frame plug-in mounting assembly, 3-pole

OEM part number	PM4754	A	S512 p.1 table; oem_spec
Description	Plug-in mounting assembly (same cat. no. line and load end); switchboard cat. nos. PL4762 / PL4763 listed	A	same as above
Breaker compatibility	Siemens F, FD, FM and FF frame	A	same as above
Poles	3-pole	A	same as above
Torque values	Breaker to tulip clip assemblies: 5/16-18x1-1/2 round head screws 5-6 ft-lb [6.78-8.13 N-m] (2in screws on load side of CLF/CFD); 1/2-13 studs 35 ft-lb (Fig. 5)	A	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00484	TCF2	Siemens	breaker-mounting-kit	STATUS UNKNOWN

FD frame replacement plug-in tulip adapter, 2-pole

OEM part number	TCF2	A	S513 p.1; oem_spec
Breaker compatibility	FD frame breakers used with plug-in mounting assemblies PC4753, PC4754, PM4754	A	same as above
Poles	2-pole	A	same as above
Torque values	5-6 ft-lb [6.78-8.13 N-m]	A	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00485	TCF3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

FD frame replacement plug-in tulip adapter, 3-pole

OEM part number	TCF3	A	S513 p.1; oem_spec
Breaker compatibility	FD frame breakers used with plug-in mounting assemblies PC4753, PC4754, PM4754	A	same as above
Poles	3-pole	A	same as above
Torque values	5-6 ft-lb [6.78-8.13 N-m]	A	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00480	**MSF6-50**	FD/FM frame breaker mounting screw kit	FD and FM frame; CFD breakers require 6 screws (2 kits) A	unknown

EDH-SIE-00480 **MSF6-50** Siemens fastener **STATUS UNKNOWN**

FD/FM frame breaker mounting screw kit

OEM part number	MSF6-50	A	S509 p.1; oem_spec
Alternate / superseded numbers	MSF650 [alias]	A	same as above
Breaker compatibility	FD and FM frame; CFD breakers require 6 screws (2 kits)	A	same as above
Kit contents	Screws A with washers B/C	A	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Material, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00304	**RS4755**	Siemens RS4755 rear-connecting stud, All FD, long (line or load) 7.06 in	All FD (250 A) A	current
EDH-SIE-00303	**RS4756**	Siemens RS4756 rear-connecting stud, All FD, short (line or load) 3.12 in	All FD (250 A) A	current

EDH-SIE-00304 **RS4755** Siemens breaker-accessory **CURRENT**

Siemens RS4755 rear-connecting stud, All FD, long (line or load) 7.06 in

OEM part number	RS4755	A	S203, S204, S510 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long (line or load). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
Application	accessory	A	same as above
	3-pole breaker requires 4 of RS4755 plus 2 of RS4756	A	S510 pp.1-2; oem_spec
Breaker compatibility	All FD (250 A)	A	S203, S204 s6 p. 7-165; oem_spec
	FJ6(ETI), F6, HF6, CLF(ETI), HFJ6, SFD6, SHFD6, (H)(H)FXD6(ETI), (H)(H)FD6, CFD6(ETI), SCFD6, FFC, FFF	A	S510 pp.1-2; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
Dimensions	Extension behind breaker 7.06 in	A	S203 p. 7-165; oem_spec
	Drilling plan: 1.50in pole pitch, .74in, 7.90in (F) between line/load studs, .80in; dims A/B: F 9.50/7.90in, CLF 14.20/12.52in; panel must be insulating material (1.00in max)	A	S510 pp.1-2; oem_spec
Mounting-hole pattern	Drill to clear .50in dia stud; 3-pole 1.50/1.50in; 2-pole 3.00in	A	same as above
Fasteners	1-1/2in screws line & load (2in on load side of CLF and CFD); 5/16 flat washer + lockwasher; 1/2-13 stud with 1/2 washer, holding nut, double-face nuts, insulating tubing/bushing; upper/lower end shields	A	same as above
Torque values	5-6 ft-lb	A	same as above
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Identification features, Material		

EDH-SIE-00303	RS4756	Siemens	breaker-accessory	CURRENT

Siemens RS4756 rear-connecting stud, All FD, short (line or load) 3.12 in

OEM part number	RS4756	A	S203, S204, S510 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short (line or load). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
Application	accessory	A	same as above
	3-pole breaker requires 4 of RS4755 plus 2 of RS4756	A	S510 pp.1-2; oem_spec
Breaker compatibility	All FD (250 A)	A	S203, S204 s6 p. 7-165; oem_spec
	FJ6(ETI), F6, HF6, CLF(ETI), HFJ6, SFD6, SHFD6, (H)(H)FXD6(ETI), (H)(H)FD6, CFD6(ETI), SCFD6, FFC, FFF	A	S510 pp.1-2; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
Dimensions	Extension behind breaker 3.12 in	A	S203 p. 7-165; oem_spec
	Drilling plan: 1.50in pole pitch, .74in, 7.90in (F) between line/load studs, .80in; dims A/B: F 9.50/7.90in, CLF 14.20/12.52in; panel must be insulating material (1.00in max)	A	S510 pp.1-2; oem_spec
Mounting-hole pattern	Drill to clear .50in dia stud; 3-pole 1.50/1.50in; 2-pole 3.00in	A	same as above
Fasteners	1-1/2in screws line & load (2in on load side of CLF and CFD); 5/16 flat washer + lockwasher; 1/2-13 stud with 1/2 washer, holding nut, double-face nuts, insulating tubing/bushing; upper/lower end shields	A	same as above
Torque values	5-6 ft-lb	A	same as above
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Identification features, Material		

Breaker family Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00669	**LK11750**	Power Mod lug kit for JD/LD frame breaker, 3-lug (3-pole)	JD and LD frame molded case circuit breakers (Power Mod modular meteri A	unknown
EDH-SIE-00667	**LK12500**	Power Mod lug kit for JD/LD frame breaker, 3-lug (3-pole)	JD and LD frame molded case circuit breakers (Power Mod modular meteri A	unknown
EDH-SIE-00670	**LK31750**	Power Mod lug kit for JD/LD frame breaker, 4-lug	JD and LD frame molded case circuit breakers (Power Mod modular meteri A	unknown
EDH-SIE-00668	**LK32500**	Power Mod lug kit for JD/LD frame breaker, 4-lug	JD and LD frame molded case circuit breakers (Power Mod modular meteri A	unknown
EDH-SIE-00486	**TA2J6500T10**	JD/LD frame 2-cavity 500 kcmil connector with #10-32 sensing tap	JD: JXD2(-A), JXD6(-A), HJXD6(-A), HHJXD6, CJD6(-A); LD: LXD6(-A), HLX A	unknown

EDH-SIE-00669	LK11750	Siemens	lug-kit	STATUS UNKNOWN

Power Mod lug kit for JD/LD frame breaker, 3-lug (3-pole)

OEM part number	LK11750	A	S584 p.1; oem_spec
Description	Breaker terminal lug kit, wire range 500-600 kcmil CU, 500-750 kcmil AL	A	same as above
Breaker compatibility	JD and LD frame molded case circuit breakers (Power Mod modular metering)	A	same as above
Kit contents	(3)/(4) lugs with wire binding screws; (3)/(4) mounting screws	A	same as above
Torque values	Mounting screw 228 lb-in; wire binding screws 500 lb-in	A	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00667	LK12500	Siemens	lug-kit	STATUS UNKNOWN

Power Mod lug kit for JD/LD frame breaker, 3-lug (3-pole)

OEM part number	LK12500	A	S583 p.1; oem_spec
Description	Breaker terminal lug kit, wire range 3/0-500 kcmil CU, 4/0-500 kcmil AL	A	same as above
Breaker compatibility	JD and LD frame molded case circuit breakers (Power Mod modular metering)	A	same as above
Kit contents	(3)/(4) lugs with wire binding screws; (6)/(8) mounting screws	A	same as above
Torque values	Mounting screw 132 lb-in; wire binding screws 300 lb-in	A	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00670	LK31750	Siemens	lug-kit	STATUS UNKNOWN

Power Mod lug kit for JD/LD frame breaker, 4-lug

OEM part number	LK31750	A	S584 p.1; oem_spec
Description	Breaker terminal lug kit, wire range 500-600 kcmil CU, 500-750 kcmil AL	A	same as above
Breaker compatibility	JD and LD frame molded case circuit breakers (Power Mod modular metering)	A	same as above
Kit contents	(3)/(4) lugs with wire binding screws; (3)/(4) mounting screws	A	same as above
Torque values	Mounting screw 228 lb-in; wire binding screws 500 lb-in	A	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00668	LK32500	Siemens	lug-kit	STATUS UNKNOWN

Power Mod lug kit for JD/LD frame breaker, 4-lug

OEM part number	LK32500	A	S583 p.1; oem_spec
Description	Breaker terminal lug kit, wire range 3/0-500 kcmil CU, 4/0-500 kcmil AL	A	same as above
Breaker compatibility	JD and LD frame molded case circuit breakers (Power Mod modular metering)	A	same as above
Kit contents	(3)/(4) lugs with wire binding screws; (6)/(8) mounting screws	A	same as above
Torque values	Mounting screw 132 lb-in; wire binding screws 300 lb-in	A	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00486	TA2J6500T10	Siemens	lug-kit	STATUS UNKNOWN

JD/LD frame 2-cavity 500 kcmil connector with #10-32 sensing tap

OEM part number	TA2J6500T10	A	S515 p.1; oem_spec
Alternate / superseded numbers	TA2-J6500T10 [alias]	A	same as above
Description	Solderless 2-cavity connector, one line or load connection; cable range (1 or 2) 3/0-500 kcmil Cu, (1 or 2) 4/0-500 kcmil Al; #10-32 tapped hole for voltage sensing (#10-32 round head SEMS)	A	same as above
Breaker compatibility	JD: JXD2(-A), JXD6(-A), HJXD6(-A), HHJXD6, CJD6(-A); LD: LXD6(-A), HLXD6(-A), HHLXD6, CLD6(-A); ETI MCIs; Sentron Series III SJD6(-A), SHJD6(-A), SCJD6(-A), JDFP(-A), SLD6(-A), SHLD6(-A), LDFP(-A); JF (JFF, JFC), LF (LFF, LFC); JM6, JMK, LM6, LMK	A	same as above
Torque values	Mounting screw 132 in-lb [14.9 N-m]; cable set screws 300 in-lb [33.9 N-m]; strip 1-1/16in	A	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Dimensions, Material, Status		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00274	**CCL600**	Siemens CCL600 compression lug, JD/LD	JXD2-A, J(X)D6-A, HJ(X)D6-A, HHJ(X)D6-A, CJD6, SJD6-B, SHJD6-B, SCJD6- **A**	current
EDH-SIE-00273	**TA1L6750**	Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil	LD/JD family 250-600 A (Q155 row) **A**	current
EDH-SIE-00270	**TA2J630**	Siemens TA2J630 lug, SJD6-B 65-200A	SJD6-B, SHJD6-B, SCJD6-B 65-200 A **A**	current
EDH-SIE-00269	**TA2J6500**	Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil	JXD2(A), JXD6(A), JD6(A), SJD6-B, HJD6(A), HJXD6(A), HHJXD6, HHJD6, SH **A**	current
EDH-SIE-00275	**TA6JD20**	Siemens TA6JD20 distribution lug, JD/LD	JD/LD families 200-600 A, 2/3-pole **A**	current
EDH-SIE-00271	**TC1J6600**	Siemens TC1J6600 copper lug, JD/LD (100% rated)	J(X)D2(A), J(X)D6(A), HJD6(A), HHJD6, SHJD6-B, L(X)D6(A), HHLD6, HLD6(**A**	current
EDH-SIE-00272	**TC2J6500**	Siemens TC2J6500 copper lug, JD/LD (100% rated)	JD/LD frames 200-600 A **A**	current

EDH-SIE-00274 — CCL600 — Siemens — lug — CURRENT

Siemens CCL600 compression lug, JD/LD

OEM part number	CCL600	**A**	S203, S204, S521 s6 p. 7-155; JD page; oem_spec
Description	Compression lug	**A**	S203, S204 s6 p. 7-155; JD page; oem_spec
	Crimp compression connector; 500 kcmil dies: Homac UT-15 94/96 (2 crimps), Burndy Y-35 655/321 (3), Kearny WH-2 1-1/8-2 (2); 1/0-500 kcmil Square D VC-6 (2)	**A**	S521 pp.1-2; oem_spec
Application	accessory	**A**	S203, S204 s6 p. 7-155; JD page; oem_spec
Breaker compatibility	JXD2-A, J(X)D6-A, HJ(X)D6-A, HHJ(X)D6-A, CJD6, SJD6-B, SHJD6-B, SCJD6-B, L(X)D6-A, HL(X)D6-A, CLD6, SLD6-B, SHLD6-B, SCLD6-B 200-600 A, 2/3-pole	**A**	same as above
	JD: JXD2(-A), JXD6(-A), HJXD6(-A), HHJXD6, CJD6(-A); LD: LXD6(-A), HLXD6(-A), HHLXD6, CLD6(-A); ETI MCIs; Sentron Series III SJD6(-A), SHJD6(-A), SCJD6(-A), JDFP(-A), SLD6(-A), SHLD6(-A), LDFP(-A); JF (JFF, JFC), LF (LFF, LFC); JM6, JMK, LM6, LMK	**A**	S521 pp.1-2; oem_spec
Kit contents	1 lug per kit; wire range 500 kcmil (JD page: 1 pc #1/0-500 kcmil Cu/Al)	**A**	S203, S204 s6 p. 7-155; JD page; oem_spec
Torque values	Tang secured with 3/8-16 screw + conical spring washer, 228 in-lb	**A**	S521 pp.1-2; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	S203, S204 s6 p. 7-155; JD page; oem_spec
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-SIE-00273	TA1L6750	Siemens	lug	CURRENT

Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil

OEM part number	TA1L6750	A	S203, S204, S517 s6 p. 7-155; JD/LD pages; oem_spec
Alternate / superseded numbers	TA1-L6750	A	S517 alias; p.1; oem_spec
Description	Optional aluminum mechanical lug	A	S203, S204 s6 p. 7-155; JD/LD pages; oem_spec
	Cable range (1) 500-750 kcmil Al, (1) 600-800 kcmil Cu	A	S517 p.1; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-155; JD/LD pages; oem_spec
Breaker compatibility	LD/JD family 250-600 A (Q155 row)	A	same as above
	JD: JXD2(-A), JXD6(-A), HJXD6(-A), HHJXD6, CJD6(-A); LD: LXD6(-A), HLXD6(-A), HHLXD6, CLD6(-A); ETI MCIs; Sentron Series III SJD6(-A), SHJD6(-A), SCJD6(-A), JDFP(-A), SLD6(-A), SHLD6(-A), LDFP(-A); JF (JFF, JFC), LF (LFF, LFC); JM6, JMK, LM6, LMK	A	S517 p.1; oem_spec
Kit contents	1 lug; wire range 1 x 500-750 kcmil Al or 1 x 500-600 kcmil Cu	A	S203, S204 s6 p. 7-155; JD/LD pages; oem_spec
Material	{'value': 'Aluminum', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Torque values	Mounting screw 228 in-lb [25.76 N-m]; cable set screws 500 in-lb [56.49 N-m]; strip 1-1/16in	A	S517 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; JD/LD pages; oem_spec
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

EDH-SIE-00270	TA2J630	Siemens	lug	CURRENT

Siemens TA2J630 lug, SJD6-B 65-200A

OEM part number	TA2J630	A	S203, S204 s6 p. 7-154; JD page; oem_spec
Description	Aluminum-body lug, 1-2 cables	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SJD6-B, SHJD6-B, SCJD6-B 65-200 A	A	same as above
Kit contents	1 lug; wire range 1-2 cables #4 AWG-3/0 Cu or Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00269	TA2J6500	Siemens	lug	CURRENT

Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil

OEM part number	TA2J6500	A	S203, S204, S519 s6 JD/LD pages; s6 p. 7-154; oem_spec
Alternate / superseded numbers	TA2-J6500	A	S519 alias; p.1; oem_spec
Description	Standard aluminum-body line/load lug for JD and LD frames; six lugs per 3-pole breaker; suffix 'L' = lugs installed	A	S203, S204 s6 JD/LD pages; s6 p. 7-154; oem_spec
Application	accessory	A	same as above
Breaker compatibility	JXD2(A), JXD6(A), JD6(A), SJD6-B, HJD6(A), HJXD6(A), HHJXD6, HHJD6, SHJD6-B, CJD6, SCJD6-B (200-400 A); LXD6(A), LD6(A), SLD6-B, HLD6(A), HLXD6(A), HHLXD6, HHLD6, SHLD6-B, CLD6, SCLD6-B (250-600 A)	A	same as above
	JXD2(A), JXD6(A), JD6(A), JFC, JFF, SJD6(A), HJD6(A), HHJXD6, HHJD6, SHJD6(A), CJD6, SCJD6, LXD6(A), LD6(A), LFC, LFF, SLD6(A), HLD6(A), HHLXD6, HHLD6, SHLD6(A), CLD6, SCLD6, JM6, JMK, LM6, LMK	A	S519 p.1; oem_spec
Kit contents	1 lug (6 per 3-pole breaker); wire range 1-2 cables, 3/0-500 kcmil Cu / 4/0-500 kcmil Al	A	S203, S204 s6 JD/LD pages; s6 p. 7-154; oem_spec
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Torque values	Mounting screw 132 lb-in [14.9 N-m]; set screws 300 lb-in [33.9 N-m] (3/0 CU/AL, 4/0 AL, 250-500 kcmil CU/AL); line shield screws 8 lb-in [0.9 N-m]	A	S519 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 JD/LD pages; s6 p. 7-154; oem_spec
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

EDH-SIE-00275	TA6JD20	Siemens	lug	CURRENT

Siemens TA6JD20 distribution lug, JD/LD

OEM part number	TA6JD20	A	S203, S204, S514 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug	A	S203, S204 s6 p. 7-155; oem_spec
Application	accessory	A	same as above
	Special purpose wire connector, not for general use	A	S514 p.1; oem_spec
Breaker compatibility	JD/LD families 200-600 A, 2/3-pole	A	S203, S204 s6 p. 7-155; oem_spec
	JXD2-A, JXD6-A, JD6-A, HJD6-A, HHJXD6, HHJD6, HJXD6-A, CJD6, LXD6-A, LD6-A, HLD6-A, HHLXD6, HHLD6, HLXD6-A, CLD6, JM6, JMK, LM6, LMK	A	S514 p.1; oem_spec
Kit contents	1 lug per kit; wire range #14-2/0 AWG Cu / #6-2/0 AWG Al, 6 wires	A	S203, S204 s6 p. 7-155; oem_spec
	Connector assembly, lockwashers, mounting screws	A	S514 p.1; oem_spec
Torque values	Connector mounting screw 132 lb-in [14.9 N-m]; binding screws 2/0-6 AWG Cu/Al 120 lb-in, 8 AWG Cu 40 lb-in, 10-14 AWG Cu 35 lb-in	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-SIE-00271	TC1J6600	Siemens	lug	CURRENT

Siemens TC1J6600 copper lug, JD/LD (100% rated)

OEM part number	TC1J6600	A	S203, S204, S518 s6 p. 7-155; oem_spec
Alternate / superseded numbers	TC1-J6600	A	S518 alias; p.1; oem_spec
Description	Optional copper mechanical lug; used for 100% rated JD/LD frame breakers	A	S203, S204 s6 p. 7-155; oem_spec
	Cable range (1) 3/0-600 kcmil Cu	A	S518 p.1; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-155; oem_spec
Breaker compatibility	J(X)D2(A), J(X)D6(A), HJD6(A), HHJD6, SHJD6-B, L(X)D6(A), HHLD6, HLD6(A), SHLD6-B, CJD6, CLD6 200-600 A	A	same as above
	JD: JXD2(-A), JXD6(-A), HJXD6(-A), HHJXD6, CJD6(-A); LD: LXD6(-A), HLXD6(-A), HHLXD6, CLD6(-A); ETI MCIs; Sentron Series III SJD6(-A), SHJD6(-A), SCJD6(-A), JDFP(-A), SLD6(-A), SHLD6(-A), LDFP(-A); JF (JFF, JFC), LF (LFF, LFC); JM6, JMK, LM6, LMK	A	S518 p.1; oem_spec
Kit contents	1 lug; wire range 1 x 3/0-600 kcmil Cu	A	S203, S204 s6 p. 7-155; oem_spec
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Torque values	Mounting screw 226 in-lb [25.53 N-m]; cable set screws 500 in-lb [56.49 N-m]	A	S518 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

EDH-SIE-00272	TC2J6500	Siemens	lug	CURRENT

Siemens TC2J6500 copper lug, JD/LD (100% rated)

OEM part number	TC2J6500	A	S203, S204, S520 s6 p. 7-155; oem_spec
Alternate / superseded numbers	TC2-J6500	A	S520 alias; p.1; oem_spec
Description	Optional copper mechanical lug; used for 100% rated JD/LD	A	S203, S204 s6 p. 7-155; oem_spec
	Cable range (1 or 2) 3/0-500 kcmil Cu	A	S520 p.1; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-155; oem_spec
Breaker compatibility	JD/LD frames 200-600 A	A	same as above
	JD: JXD2(-A), JXD6(-A), HJXD6(-A), HHJXD6, CJD6(-A); LD: LXD6(-A), HLXD6(-A), HHLXD6, CLD6(-A); ETI MCIs; Sentron Series III SJD6(-A), SHJD6(-A), SCJD6(-A), JDFP(-A), SLD6(-A), SHLD6(-A), LDFP(-A); JF (JFF, JFC), LF (LFF, LFC); JM6, JMK, LM6, LMK	A	S520 p.1; oem_spec
Kit contents	1 lug; wire range 1-2 x 3/0-500 kcmil Cu	A	S203, S204 s6 p. 7-155; oem_spec
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Torque values	Mounting screw [14.91 N-m] (approx. 132 in-lb); cable set screws 300 in-lb [33.89 N-m]	A	S520 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00489	**PC5777**	JD frame plug-in mounting assembly, 2-pole	JXD2(-A), JXD6(-A)(ETI), HJXD6(-A), CJD6(-A)(ETI), SCJD6(-A), JDFP(-A) A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00490	**PC5778**	JD frame plug-in mounting assembly, 3-pole	JXD2(-A), JXD6(-A)(ETI), HJXD6(-A), CJD6(-A)(ETI), SCJD6(-A), JDFP(-A) **A**	unknown
EDH-SIE-00493	**TCJ2**	JD/LD frame replacement plug-in tulip adapter, 2-pole	JD/LD/JF/LF frame used with plug-in assemblies PC5777, PC5778, PC5660, **A**	unknown
EDH-SIE-00494	**TCJ3**	JD/LD frame replacement plug-in tulip adapter, 3-pole	JD/LD/JF/LF frame used with plug-in assemblies PC5777, PC5778, PC5660, **A**	unknown

EDH-SIE-00489 PC5777 — Siemens — breaker-mounting-kit — STATUS UNKNOWN

JD frame plug-in mounting assembly, 2-pole

OEM part number	PC5777	**A**	S523 pp.1-3; oem_spec
Description	Plug-in mounting block assembly; switchboard mounting plate PL5796 (all other types: A 6.25 B 5.25 C 3.00 D 8.75in) or PL5797 (current limiting CJD6/CLD6: 13.11/12.11/9.86/15.61in); current-limiting breakers require end shield CLTCJL2/CLTCJL3	**A**	same as above
Breaker compatibility	JXD2(-A), JXD6(-A)(ETI), HJXD6(-A), CJD6(-A)(ETI), SCJD6(-A), JDFP(-A)	**A**	same as above
Poles	2-pole	**A**	same as above
Mounting-hole pattern	.375 [9.53] dia mounting holes (4); .344 x .75 slots (4); 1.25, 1.75, 2.50, 1.125in spacing	**A**	same as above
Torque values	Tulip clip 1/4-20x1 hex bolts with 1/4 belleville washers 60-72 in-lb [6.78-8.13 N-m]	**A**	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Kit contents, Material, Status		

EDH-SIE-00490 PC5778 — Siemens — breaker-mounting-kit — STATUS UNKNOWN

JD frame plug-in mounting assembly, 3-pole

OEM part number	PC5778	**A**	S523 pp.1-3; oem_spec
Description	Plug-in mounting block assembly; switchboard mounting plate PL5796 (all other types: A 6.25 B 5.25 C 3.00 D 8.75in) or PL5797 (current limiting CJD6/CLD6: 13.11/12.11/9.86/15.61in); current-limiting breakers require end shield CLTCJL2/CLTCJL3	**A**	same as above
Breaker compatibility	JXD2(-A), JXD6(-A)(ETI), HJXD6(-A), CJD6(-A)(ETI), SCJD6(-A), JDFP(-A)	**A**	same as above
Poles	3-pole	**A**	same as above
Mounting-hole pattern	.375 [9.53] dia mounting holes (4); .344 x .75 slots (4); 1.25, 1.75, 2.50, 1.125in spacing	**A**	same as above
Torque values	Tulip clip 1/4-20x1 hex bolts with 1/4 belleville washers 60-72 in-lb [6.78-8.13 N-m]	**A**	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Kit contents, Material, Status		

EDH-SIE-00493 TCJ2 — Siemens — breaker-mounting-kit — STATUS UNKNOWN

JD/LD frame replacement plug-in tulip adapter, 2-pole

OEM part number	TCJ2	**A**	S524 pp.1-3; oem_spec
Breaker compatibility	JD/LD/JF/LF frame used with plug-in assemblies PC5777, PC5778, PC5660, PC5661, PM5661, PM5778	**A**	same as above
Poles	2-pole	**A**	same as above
Kit contents	Tulip clip assemblies (6x for 3-pole per drawing), 1/4 belleville washers, 1/4-20x1 bolts, one-piece end shields, accessory label	**A**	same as above
Torque values	1/4-20x1 hex head bolts with 1/4 belleville washers 60-72 in-lb [6.78-8.13 N-m]; end shield bracket screws 5 in-lb max	**A**	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00494	TCJ3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

JD/LD frame replacement plug-in tulip adapter, 3-pole

OEM part number	TCJ3	A	S524 pp.1-3; oem_spec
Breaker compatibility	JD/LD/JF/LF frame used with plug-in assemblies PC5777, PC5778, PC5660, PC5661, PM5661, PM5778	A	same as above
Poles	3-pole	A	same as above
Kit contents	Tulip clip assemblies (6x for 3-pole per drawing), 1/4 belleville washers, 1/4-20x1 bolts, one-piece end shields, accessory label	A	same as above
Torque values	1/4-20x1 hex head bolts with 1/4 belleville washers 60-72 in-lb [6.78-8.13 N-m]; end shield bracket screws 5 in-lb max	A	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Dimensions, Material, Status		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00313	**CLRSJL3**	Siemens CLRSJL3 rear-stud shield kit, CJD/SCJD/CLD/SCLD	CJD, SCJD, CLD, SCLD **A**	current
EDH-SIE-00276	**JDTERMSHIELD**	Siemens JDTERMSHIELD terminal shield, JD/LD 3-pole	JD, LD 3-pole **A**	current

EDH-SIE-00313	CLRSJL3	Siemens	barrier	CURRENT

Siemens CLRSJL3 rear-stud shield kit, CJD/SCJD/CLD/SCLD

OEM part number	CLRSJL3	A	S203, S204, S522 s6 p. 7-165; oem_spec
Description	Required shield kit to add with rear-connecting studs on CJD, SCJD, CLD, SCLD	A	S203, S204 s6 p. 7-165; oem_spec
	End shield assembly required with rear connecting studs on current-limiting breakers, 3-pole, load end	A	S522 p.1 table; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-165; oem_spec
Breaker compatibility	CJD, SCJD, CLD, SCLD	A	same as above
Poles	3-pole	A	S522 p.1 table; oem_spec
Torque values	End shield screws 5 in-lb max	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-165; oem_spec
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Kit contents, Material		
Open question	*What does the CLRSJL3 kit contain?*		

EDH-SIE-00276	JDTERMSHIELD	Siemens	barrier	CURRENT

Siemens JDTERMSHIELD terminal shield, JD/LD 3-pole

OEM part number	JDTERMSHIELD	A	S203, S204 s6 p. 7-160; oem_spec
Description	Terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JD, LD 3-pole	A	same as above
Kit contents	std pkg 1	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00487	**MSJ6**	JD/LD frame breaker mounting bolt kit	JD: JXD2(-A), JXD6(-A), HJXD6(-A), HHJXD6, CJD6(-A); LD: LXD6(-A), HLX **A**	unknown

EDH-SIE-00487 **MSJ6** Siemens fastener **STATUS UNKNOWN**

JD/LD frame breaker mounting bolt kit

OEM part number	MSJ6	**A**	S516 p.1; oem_spec
Breaker compatibility	JD: JXD2(-A), JXD6(-A), HJXD6(-A), HHJXD6, CJD6(-A); LD: LXD6(-A), HLXD6(-A), HHLXD6, CLD6(-A); ETI MCIs; Sentron Series III SJD6(-A), SHJD6(-A), SCJD6(-A), JDFP(-A), SLD6(-A), SHLD6(-A), LDFP(-A); JF (JFF, JFC), LF (LFF, LFC); JM6, JMK, LM6, LMK	**A**	same as above
Kit contents	Bolts A, washers and keps nuts B; SCJD6, SCLD6, CJD6(ETI), CLD6(ETI) require 6 bolts (2 kits)	**A**	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Dimensions, Material, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00306	**RS5773**	Siemens RS5773 rear-connecting stud, All JD, long 11.20 in	All JD (400 A) **A**	current
EDH-SIE-00305	**RS5774**	Siemens RS5774 rear-connecting stud, All JD, short 5.85 in	All JD (400 A) **A**	current

EDH-SIE-00306 **RS5773** Siemens breaker-accessory **CURRENT**

Siemens RS5773 rear-connecting stud, All JD, long 11.20 in

OEM part number	RS5773	**A**	S203, S204, S522 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	**A**	S203, S204 s6 p. 7-165; oem_spec
Application	accessory	**A**	same as above
	2 per 3-pole breaker (with 4 RS5774)	**A**	S522 pp.1-2; oem_spec
Breaker compatibility	All JD (400 A)	**A**	S203, S204 s6 p. 7-165; oem_spec
	JD2, JXD2, JJ6, JL6(ETI), HJ6, JXD6(ETI), SJD6, HJD6, HHJD6 (current-limiting types with end shield CLRSJL2/CLRSJL3)	**A**	S522 pp.1-2; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	**A**	S203, S204 s6 p. 7-165; oem_spec
	Stud assembly, stand-off insulators, insulator bushings, locknuts, 'T' connector, one-piece end shields; label Pc. No. 60229	**A**	S522 pp.1-2; oem_spec
Dimensions	Extension behind breaker 11.20 in	**A**	S203 p. 7-165; oem_spec
	Drilling: DIM X 9.44in all types except CLD6(ETI)/HCLD6/CLJ(ETI)/SCLD6(ETI) = 16.30in; 1.25in pole spacing, .78in, 2.50/5.00in, 5/8in wide cut-out; .344 dia holes; 11.00/9.75/7.50/4.00/17.88in panel dims	**A**	S522 pp.1-2; oem_spec
Torque values	5/16-18x1 hex head bolt with 5/16 serrated cone lockwasher 132 in-lb; second locknut 132 in-lb; current-limiting end shield pan head screws 5 in-lb max	**A**	same as above
Status	current (Listed; built to order)	**B**	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

EDH-SIE-00305	RS5774	Siemens	breaker-accessory	CURRENT

Siemens RS5774 rear-connecting stud, All JD, short 5.85 in

OEM part number	RS5774	A	S203, S204, S522 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
Application	accessory	A	same as above
	4 per 2- or 3-pole breaker	A	S522 pp.1-2; oem_spec
Breaker compatibility	All JD (400 A)	A	S203, S204 s6 p. 7-165; oem_spec
	JD2, JXD2, JJ6, JL6(ETI), HJ6, JXD6(ETI), SJD6, HJD6, HHJD6 (current-limiting types with end shield CLRSJL2/CLRSJL3)	A	S522 pp.1-2; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
	Stud assembly, stand-off insulators, insulator bushings, locknuts, 'T' connector, one-piece end shields; label Pc. No. 60229	A	S522 pp.1-2; oem_spec
Dimensions	Extension behind breaker 5.85 in	A	S203 p. 7-165; oem_spec
	Drilling: DIM X 9.44in all types except CLD6(ETI)/HCLD6/CLJ(ETI)/SCLD6(ETI) = 16.30in; 1.25in pole spacing, .78in, 2.50/5.00in, 5/8in wide cut-out; .344 dia holes; 11.00/9.75/7.50/4.00/17.88in panel dims	A	S522 pp.1-2; oem_spec
Torque values	5/16-18x1 hex head bolt with 5/16 serrated cone lockwasher 132 in-lb; second locknut 132 in-lb; current-limiting end shield pan head screws 5 in-lb max	A	same as above
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

Terminal Shield

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00488	**CLRSJL2**	Current-limiting JD/LD rear-stud end shield assembly, 2-pole	—	unknown

EDH-SIE-00488	CLRSJL2	Siemens	terminal-shield	STATUS UNKNOWN

Current-limiting JD/LD rear-stud end shield assembly, 2-pole

OEM part number	CLRSJL2	A	S522 p.1 table; oem_spec
Description	End shield assembly required with rear connecting studs on current-limiting (CJD/CLD/SCLD/CLJ) breakers, 2-pole, load end	A	same as above
Poles	2-pole	A	same as above
Torque values	End shield screws 5 in-lb max	A	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Breaker family Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00491	**PC5660**	LD frame plug-in mounting assembly, 2-pole	LXD6(-A)(ETI), HLXD6(-A), HHLXD6(-A), SLD6(-A), SHLD6(-A), LFC, LFF, C A	unknown
EDH-SIE-00492	**PC5661**	LD frame plug-in mounting assembly, 3-pole	LXD6(-A)(ETI), HLXD6(-A), HHLXD6(-A), SLD6(-A), SHLD6(-A), LFC, LFF, C A	unknown

EDH-SIE-00491	PC5660	Siemens	breaker-mounting-kit	STATUS UNKNOWN

LD frame plug-in mounting assembly, 2-pole

OEM part number	PC5660	**A**	S523 pp.1-3; oem_spec
Description	Plug-in mounting block assembly; switchboard mounting plate PL5796 (all other types: A 6.25 B 5.25 C 3.00 D 8.75in) or PL5797 (current limiting CJD6/CLD6: 13.11/12.11/9.86/15.61in); current-limiting breakers require end shield CLTCJL2/CLTCJL3	**A**	same as above
Breaker compatibility	LXD6(-A)(ETI), HLXD6(-A), HHLXD6(-A), SLD6(-A), SHLD6(-A), LFC, LFF, CLD6(-A)(ETI)	**A**	same as above
Poles	2-pole	**A**	same as above
Mounting-hole pattern	.375 [9.53] dia mounting holes (4); .344 x .75 slots (4); 1.25, 1.75, 2.50, 1.125in spacing	**A**	same as above
Torque values	Tulip clip 1/4-20x1 hex bolts with 1/4 belleville washers 60-72 in-lb [6.78-8.13 N-m]	**A**	same as above
Cross-links	Breakers: Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Kit contents, Material, Status		

EDH-SIE-00492	PC5661	Siemens	breaker-mounting-kit	STATUS UNKNOWN

LD frame plug-in mounting assembly, 3-pole

OEM part number	PC5661	**A**	S523 pp.1-3; oem_spec
Description	Plug-in mounting block assembly; switchboard mounting plate PL5796 (all other types: A 6.25 B 5.25 C 3.00 D 8.75in) or PL5797 (current limiting CJD6/CLD6: 13.11/12.11/9.86/15.61in); current-limiting breakers require end shield CLTCJL2/CLTCJL3	**A**	same as above
Breaker compatibility	LXD6(-A)(ETI), HLXD6(-A), HHLXD6(-A), SLD6(-A), SHLD6(-A), LFC, LFF, CLD6(-A)(ETI)	**A**	same as above
Poles	3-pole	**A**	same as above
Mounting-hole pattern	.375 [9.53] dia mounting holes (4); .344 x .75 slots (4); 1.25, 1.75, 2.50, 1.125in spacing	**A**	same as above
Torque values	Tulip clip 1/4-20x1 hex bolts with 1/4 belleville washers 60-72 in-lb [6.78-8.13 N-m]	**A**	same as above
Cross-links	Breakers: Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Kit contents, Material, Status		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00308	**RS5783**	Siemens RS5783 rear-connecting stud, All LD, long 11.20 in	All LD (600 A) **A**	current
EDH-SIE-00307	**RS5784**	Siemens RS5784 rear-connecting stud, All LD, short 5.85 in	All LD (600 A) **A**	current

EDH-SIE-00308	RS5783	Siemens	breaker-accessory	CURRENT

Siemens RS5783 rear-connecting stud, All LD, long 11.20 in

OEM part number	RS5783	A	S203, S204, S522 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
Application	accessory	A	same as above
	2 per 3-pole breaker (with 4 RS5784)	A	S522 pp.1-2; oem_spec
Breaker compatibility	All LD (600 A)	A	S203, S204 s6 p. 7-165; oem_spec
	LJ6, LL6(ETI), HL6, SLL, SHL, SLD6, HLD6, HHLD6, HLXD6, LXD6(ETI) (current-limiting types with end shield CLRSJL2/CLRSJL3)	A	S522 pp.1-2; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
	Stud assembly, stand-off insulators, insulator bushings, locknuts, 'T' connector, one-piece end shields; label Pc. No. 60229	A	S522 pp.1-2; oem_spec
Dimensions	Extension behind breaker 11.20 in	A	S203 p. 7-165; oem_spec
	Drilling: DIM X 9.44in all types except CLD6(ETI)/HCLD6/CLJ(ETI)/SCLD6(ETI) = 16.30in; 1.25in pole spacing, .78in, 2.50/5.00in, 5/8in wide cut-out; .344 dia holes; 11.00/9.75/7.50/4.00/17.88in panel dims	A	S522 pp.1-2; oem_spec
Torque values	5/16-18x1 hex head bolt with 5/16 serrated cone lockwasher 132 in-lb; second locknut 132 in-lb; current-limiting end shield pan head screws 5 in-lb max	A	same as above
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

EDH-SIE-00307	RS5784	Siemens	breaker-accessory	CURRENT

Siemens RS5784 rear-connecting stud, All LD, short 5.85 in

OEM part number	RS5784	A	S203, S204, S522 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
Application	accessory	A	same as above
	4 per 2- or 3-pole breaker	A	S522 pp.1-2; oem_spec
Breaker compatibility	All LD (600 A)	A	S203, S204 s6 p. 7-165; oem_spec
	LJ6, LL6(ETI), HL6, SLL, SHL, SLD6, HLD6, HHLD6, HLXD6, LXD6(ETI) (current-limiting types with end shield CLRSJL2/CLRSJL3)	A	S522 pp.1-2; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
	Stud assembly, stand-off insulators, insulator bushings, locknuts, 'T' connector, one-piece end shields; label Pc. No. 60229	A	S522 pp.1-2; oem_spec
Dimensions	Extension behind breaker 5.85 in	A	S203 p. 7-165; oem_spec
	Drilling: DIM X 9.44in all types except CLD6(ETI)/HCLD6/CLJ(ETI)/SCLD6(ETI) = 16.30in; 1.25in pole spacing, .78in, 2.50/5.00in, 5/8in wide cut-out; .344 dia holes; 11.00/9.75/7.50/4.00/17.88in panel dims	A	S522 pp.1-2; oem_spec
Torque values	5/16-18x1 hex head bolt with 5/16 serrated cone lockwasher 132 in-lb; second locknut 132 in-lb; current-limiting end shield pan head screws 5 in-lb max	A	same as above
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

Breaker family Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00277	**TA2K500**	Siemens TA2K500 lug, LMD/MD 500-600A, 1-2 x #1-500	LMD6, LMXD6, HLMD6, HLMXD6 (TA2K500 or TA3K500 only); MD6, MXD6, SMD6- **A**	current
EDH-SIE-00278	**TA3K500**	Siemens TA3K500 lug, LMD/MD 500-800A, 1-3 x 1/0-500	LMD/MD families; MD 700-800 A **A**	current
EDH-SIE-00279	**TC2K500**	Siemens TC2K500 copper lug, MD 500-600A	SMD6-B, M(X)D6, HM(X)D6, CMD6, SCMD6-B 500-600 A **A**	current

EDH-SIE-00277	TA2K500	Siemens	lug	CURRENT

Siemens TA2K500 lug, LMD/MD 500-600A, 1-2 x #1-500

OEM part number	TA2K500	**A**	S203, S204, S527 s6 p. 7-154; MD page; oem_spec
Description	Aluminum-body lug	**A**	S203, S204 s6 p. 7-154; MD page; oem_spec
	Pressure wire connector, wire range (1-2) #1-500 kcmil Cu-Al	**A**	S527 pp.1-2 Table 1; oem_spec
Application	accessory	**A**	S203, S204 s6 p. 7-154; MD page; oem_spec
Breaker compatibility	LMD6, LMXD6, HLMD6, HLMXD6 (TA2K500 or TA3K500 only); MD6, MXD6, SMD6-B, HMD6, HMXD6, SHMD6-B, CMD6, SCMD6-B 500-600 A	**A**	same as above
	MM6, MMK, MD6, SMD6 ... (MD/ND family; sheet also lists mounting on SKM, SKMIII, KM, HN, CN for TA2K500/TA3K350)	**A**	S527 pp.1-2 Table 1; oem_spec
Kit contents	1 lug; wire range 1-2 x #1-500 kcmil Cu/Al	**A**	S203, S204 s6 p. 7-154; MD page; oem_spec
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Torque values	Set screw 375 in-lb [42.37 N-m]; connector mounting screws 7-9 ft-lb [9.5-12.2 N-m]	**A**	S527 pp.1-2 Table 1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	S203, S204 s6 p. 7-154; MD page; oem_spec
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6), Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		
Open question	*Exact type list per catalog number partly lost in text extraction; verify from PDF figure.*		

EDH-SIE-00278	TA3K500	Siemens	lug	CURRENT

Siemens TA3K500 lug, LMD/MD 500-800A, 1-3 x 1/0-500

OEM part number	TA3K500	A	S203, S204, S527 s6 p. 7-154; MD page; oem_spec
Description	Aluminum-body lug; standard line/load lug on MD/LMD (suffix 'L' = lugs installed)	A	S203, S204 s6 p. 7-154; MD page; oem_spec
	Pressure wire connector, wire range (1-3) 1/0-500 kcmil Cu-Al	A	S527 pp.1-2 Table 1; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-154; MD page; oem_spec
Breaker compatibility	LMD/MD families; MD 700-800 A	A	same as above
	MM6, MMK, MD6, SMD6 ... (MD/ND family; sheet also lists mounting on SKM, SKMIII, KM, HN, CN for TA2K500/TA3K350)	A	S527 pp.1-2 Table 1; oem_spec
Kit contents	1 lug; wire range 1-3 x 1/0-500 kcmil Cu/Al	A	S203, S204 s6 p. 7-154; MD page; oem_spec
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Torque values	Set screw 375 in-lb [42.37 N-m]; connector mounting screws 7-9 ft-lb [9.5-12.2 N-m]	A	S527 pp.1-2 Table 1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-154; MD page; oem_spec
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6), Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		
Open question	*Exact type list per catalog number partly lost in text extraction; verify from PDF figure.*		

EDH-SIE-00279	TC2K500	Siemens	lug	CURRENT

Siemens TC2K500 copper lug, MD 500-600A

OEM part number	TC2K500	A	S203, S204, S527 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug	A	S203, S204 s6 p. 7-155; oem_spec
	Pressure wire connector, wire range (1-2) #1-500 kcmil Cu only	A	S527 pp.1-2 Table 1; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-155; oem_spec
Breaker compatibility	SMD6-B, M(X)D6, HM(X)D6, CMD6, SCMD6-B 500-600 A	A	same as above
	MM6, MMK, MD6, SMD6 ... (MD/ND family; sheet also lists mounting on SKM, SKMIII, KM, HN, CN for TA2K500/TA3K350)	A	S527 pp.1-2 Table 1; oem_spec
Kit contents	1 lug; wire range 1-2 x #1 AWG-500 kcmil Cu	A	S203, S204 s6 p. 7-155; oem_spec
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Torque values	Set screw 375 in-lb [42.37 N-m]; connector mounting screws 7-9 ft-lb [9.5-12.2 N-m]	A	S527 pp.1-2 Table 1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6), Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		
Open question	*Exact type list per catalog number partly lost in text extraction; verify from PDF figure.*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00310	**RS5787**	Siemens RS5787 rear-connecting stud, LM(X)D6, HLM(X)D6, long 11.20 in	LM(X)D6, HLM(X)D6 (800 A) A	current
EDH-SIE-00309	**RS5788**	Siemens RS5788 rear-connecting stud, LM(X)D6, HLM(X)D6, short 5.85 in	LM(X)D6, HLM(X)D6 (800 A) A	current

EDH-SIE-00310	RS5787	Siemens	breaker-accessory	CURRENT

Siemens RS5787 rear-connecting stud, LM(X)D6, HLM(X)D6, long 11.20 in

OEM part number	RS5787	A	S203, S204, S525 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
Application	accessory	A	same as above
	4 per 2-pole LMD6/HLMD6/LMXD6; 4 per 3-pole LMFC/LMFF (with 2 RS5788)	A	S525 pp.1-2; oem_spec
Breaker compatibility	LM(X)D6, HLM(X)D6 (800 A)	A	S203, S204 s6 p. 7-165; oem_spec
	LMD6, HLMD6, LMXD6, LMFC, LMFF	A	S525 pp.1-2; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
	1in-12 threaded stud, stand-off insulator, insulator bushings, locknuts, 'T' connector (5/16 bolt bus connection), terminal shields	A	S525 pp.1-2; oem_spec
Dimensions	Extension behind breaker 11.20 in	A	S203 p. 7-165; oem_spec
Torque values	Stud bolt 150 in-lb [16.9 N-m]; locknut 132 in-lb [14.9 N-m]	A	S525 pp.1-2; oem_spec
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-SIE-00309	RS5788	Siemens	breaker-accessory	CURRENT

Siemens RS5788 rear-connecting stud, LM(X)D6, HLM(X)D6, short 5.85 in

OEM part number	RS5788	A	S203, S204, S525 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
Application	accessory	A	same as above
	2 per 3-pole breaker (with 4 RS5787)	A	S525 pp.1-2; oem_spec
Breaker compatibility	LM(X)D6, HLM(X)D6 (800 A)	A	S203, S204 s6 p. 7-165; oem_spec
	LMD6, HLMD6, LMXD6, LMFC, LMFF	A	S525 pp.1-2; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
	1in-12 threaded stud, stand-off insulator, insulator bushings, locknuts, 'T' connector (5/16 bolt bus connection), terminal shields	A	S525 pp.1-2; oem_spec
Dimensions	Extension behind breaker 5.85 in	A	S203 p. 7-165; oem_spec
Torque values	Stud bolt 150 in-lb [16.9 N-m]; locknut 132 in-lb [14.9 N-m]	A	S525 pp.1-2; oem_spec
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material		

Breaker family Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00281	**2TA2N8750**	Siemens 2TA2N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00283	**2TA3N8750**	Siemens 2TA3N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00285	**2TA4N8500**	Siemens 2TA4N8500 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' **A**	current
EDH-SIE-00287	**2TA4P8500**	Siemens 2TA4P8500 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' **A**	current
EDH-SIE-00282	**3TA2N8750**	Siemens 3TA2N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' **A**	current
EDH-SIE-00284	**3TA3N8750**	Siemens 3TA3N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' **A**	current
EDH-SIE-00286	**3TA4N8500**	Siemens 3TA4N8500 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' **A**	current
EDH-SIE-00288	**3TA4P8500**	Siemens 3TA4P8500 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' **A**	current
EDH-SIE-00507	**CCM800**	MD frame compression lug kit (1/0-500 kcmil)	MXD6 ETI, (H)MD6, CMD6(ETI), SMD6 ... (MD frame) **A**	unknown
EDH-SIE-00290	**CCM800K2**	Siemens CCM800K2 compression lug kit, MD 2-pole	M(X)D6, HM(X)D6, CMD6, SMD6-B, SHMD6-B, SCMD6-B 500-800 A, 2-pole **A**	current
EDH-SIE-00291	**CCM800K3**	Siemens CCM800K3 compression lug kit, MD 3-pole	MD family 500-800 A, 3-pole **A**	current
EDH-SIE-00671	**LK13500**	Power Mod lug kit for MD/ND frame breaker, 3-lug (3-pole)	MD and ND frame molded case circuit breakers (Power Mod modular meteri **A**	unknown
EDH-SIE-00673	**LK13750**	Power Mod lug kit for MD/ND frame breaker, 3-lug (3-pole)	MD and ND frame molded case circuit breakers (Power Mod modular meteri **A**	unknown
EDH-SIE-00675	**LK14500**	Power Mod lug kit for MD/ND frame breaker, 3-lug (3-pole)	MD and ND frame molded case circuit breakers (Power Mod modular meteri **A**	unknown
EDH-SIE-00672	**LK33500**	Power Mod lug kit for MD/ND frame breaker, 4-lug	MD and ND frame molded case circuit breakers (Power Mod modular meteri **A**	unknown
EDH-SIE-00674	**LK33750**	Power Mod lug kit for MD/ND frame breaker, 4-lug	MD and ND frame molded case circuit breakers (Power Mod modular meteri **A**	unknown
EDH-SIE-00676	**LK34500**	Power Mod lug kit for MD/ND frame breaker, 4-lug	MD and ND frame molded case circuit breakers (Power Mod modular meteri **A**	unknown
EDH-SIE-00502	**TA2K8750**	MD/ND frame multi-cable pressure connector (2) 500-750 kcmil Cu/Al	MD, ND, MF, NF, MM, NM frame **A**	unknown
EDH-SIE-00503	**TA2N8750**	MD/ND frame multi-cable pressure connector (2) 500-750 kcmil Cu/Al	MD, ND, MF, NF, MM, NM frame **A**	unknown
EDH-SIE-00498	**TA3K350**	MD/ND (and KM) frame pressure wire connector (1-3) 300-350 kcmil Cu-Al	MM6, MMK, MD6, SMD6 ... (MD/ND family; sheet also lists mounting on SK **A**	unknown
EDH-SIE-00505	**TA3N8750**	MD/ND frame multi-cable pressure connector (3) 500-750 kcmil Cu/Al	MD, ND, MF, NF, MM, NM frame **A**	unknown
EDH-SIE-00504	**TA3P8750**	MD/ND frame multi-cable pressure connector (3) 500-750 kcmil Cu/Al	MD, ND, MF, NF, MM, NM frame **A**	unknown
EDH-SIE-00506	**TA4H500**	MD/ND frame multi-cable pressure connector (4) #2-500 kcmil Cu/Al	MD, ND, MF, NF, MM, NM frame **A**	unknown
EDH-SIE-00501	**TA4N8500**	MD/ND frame multi-cable pressure connector (4) #2-500 kcmil Cu/Al	MD, ND, MF, NF, MM, NM frame **A**	unknown
EDH-SIE-00500	**TA4P8500**	MD/ND frame multi-cable pressure connector (4) #2-500 kcmil Cu/Al	MD, ND, MF, NF, MM, NM frame **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00499	**TC3K350**	MD/ND (and KM) frame pressure wire connector (1-3) #1-350 kcmil Cu only	MM6, MMK, MD6, SMD6 ... (MD/ND family; sheet also lists mounting on SK **A**	unknown

EDH-SIE-00281	2TA2N8750	Siemens	lug-kit	CURRENT

Siemens 2TA2N8750 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA2N8750	**A**	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	**A**	S203 s6 p. 7-154; MD page; oem_spec
Application	accessory	**A**	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	**A**	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-2 cables per lug, 500-750 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00283	2TA3N8750	Siemens	lug-kit	CURRENT

Siemens 2TA3N8750 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA3N8750	**A**	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	**A**	S203 s6 p. 7-154; MD page; oem_spec
Application	accessory	**A**	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	**A**	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-3 cables per lug, 500-750 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00285	2TA4N8500	Siemens	lug-kit	CURRENT

Siemens 2TA4N8500 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA4N8500	A	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S203 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00287	2TA4P8500	Siemens	lug-kit	CURRENT

Siemens 2TA4P8500 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA4P8500	A	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S203 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00282	3TA2N8750	Siemens	lug-kit	CURRENT

Siemens 3TA2N8750 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA2N8750	A	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S203 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-2 cables per lug, 500-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00284	3TA3N8750	Siemens	lug-kit	CURRENT

Siemens 3TA3N8750 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA3N8750	A	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S203 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-3 cables per lug, 500-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00286	3TA4N8500	Siemens	lug-kit	CURRENT

Siemens 3TA4N8500 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA4N8500	A	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S203 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00288	3TA4P8500	Siemens	lug-kit	CURRENT

Siemens 3TA4P8500 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA4P8500	A	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S203 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00507	CCM800	Siemens	lug-kit	STATUS UNKNOWN
MD frame compression lug kit (1/0-500 kcmil)				
OEM part number	CCM800	A	S531 pp.1-2; oem_spec	
Description	Crimp compression lugs; 500 kcmil dies Homac UT-15 94/96 (2), Burndy Y-35 655/321 (3), Kearny WH-2 1-1/8-2 (2); 1/0-500 kcmil Square D VC-6 (2); slide wire connector shield onto breaker end after install	A	same as above	
Breaker compatibility	MXD6 ETI, (H)MD6, CMD6(ETI), SMD6 ... (MD frame)	A	same as above	
Kit contents	(1) LH crimp lug, (2) spacers, (2) conical washers - single pole	A	same as above	
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)			
Not yet documented	Dimensions, Material, Status, Torque values			

EDH-SIE-00290	CCM800K2	Siemens	lug-kit	CURRENT
Siemens CCM800K2 compression lug kit, MD 2-pole				
OEM part number	CCM800K2	A	S203, S204, S531 s6 p. 7-155; oem_spec	
Description	Compression lug kit for complete line or load end of a 2-pole breaker	A	S203, S204 s6 p. 7-155; oem_spec	
	Crimp compression lugs; 500 kcmil dies Homac UT-15 94/96 (2), Burndy Y-35 655/321 (3), Kearny WH-2 1-1/8-2 (2); 1/0-500 kcmil Square D VC-6 (2); slide wire connector shield onto breaker end after install	A	S531 pp.1-2; oem_spec	
Application	accessory	A	S203, S204 s6 p. 7-155; oem_spec	
Breaker compatibility	M(X)D6, HM(X)D6, CMD6, SMD6-B, SHMD6-B, SCMD6-B 500-800 A, 2-pole	A	same as above	
	MXD6 ETI, (H)MD6, CMD6(ETI), SMD6 ... (MD frame)	A	S531 pp.1-2; oem_spec	
Kit contents	6 lugs; wire range 500 kcmil	A	S203, S204 s6 p. 7-155; oem_spec	
	(2) LH crimp lugs, (4) spacers, (4) conical washers - 2-pole breaker	A	S531 pp.1-2; oem_spec	
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec	
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)			
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values			

EDH-SIE-00291	CCM800K3	Siemens	lug-kit	CURRENT
Siemens CCM800K3 compression lug kit, MD 3-pole				
OEM part number	CCM800K3	A	S203, S204, S531 s6 p. 7-155; oem_spec	
Description	Compression lug kit for complete line or load end of a 3-pole breaker	A	S203, S204 s6 p. 7-155; oem_spec	
	Crimp compression lugs; 500 kcmil dies Homac UT-15 94/96 (2), Burndy Y-35 655/321 (3), Kearny WH-2 1-1/8-2 (2); 1/0-500 kcmil Square D VC-6 (2); slide wire connector shield onto breaker end after install	A	S531 pp.1-2; oem_spec	
Application	accessory	A	S203, S204 s6 p. 7-155; oem_spec	
Breaker compatibility	MD family 500-800 A, 3-pole	A	same as above	
	MXD6 ETI, (H)MD6, CMD6(ETI), SMD6 ... (MD frame)	A	S531 pp.1-2; oem_spec	
Kit contents	9 lugs; wire range 500 kcmil	A	S203, S204 s6 p. 7-155; oem_spec	
	(3) LH crimp lugs, (6) spacers, (6) conical washers - 3-pole breaker	A	S531 pp.1-2; oem_spec	
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec	
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)			
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values			

EDH-SIE-00671	LK13500	Siemens	lug-kit	STATUS UNKNOWN

Power Mod lug kit for MD/ND frame breaker, 3-lug (3-pole)

OEM part number	LK13500	A	S585 p.1; oem_spec
Description	Breaker terminal lug kit, wire range 1/0-500 kcmil AL/CU	A	same as above
Breaker compatibility	MD and ND frame molded case circuit breakers (Power Mod modular metering)	A	same as above
Kit contents	(3)/(4) lugs with wire binding screws; (6)/(8) mounting screws/lockwashers	A	same as above
Torque values	Mounting screw 228 lb-in; wire binding screws 375 lb-in	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00673	LK13750	Siemens	lug-kit	STATUS UNKNOWN

Power Mod lug kit for MD/ND frame breaker, 3-lug (3-pole)

OEM part number	LK13750	A	S586 p.1; oem_spec
Description	Breaker terminal lug kit, wire range 500-750 kcmil AL/CU	A	same as above
Breaker compatibility	MD and ND frame molded case circuit breakers (Power Mod modular metering)	A	same as above
Kit contents	(3)/(4) lugs with wire binding screws; (6)/(8) mounting screws; (6) lockwashers	A	same as above
Torque values	Mounting screw 228 lb-in; wire binding screws 375 lb-in	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00675	LK14500	Siemens	lug-kit	STATUS UNKNOWN

Power Mod lug kit for MD/ND frame breaker, 3-lug (3-pole)

OEM part number	LK14500	A	S587 p.1; oem_spec
Description	Breaker terminal lug kit, wire range 250-500 kcmil AL/CU	A	same as above
Breaker compatibility	MD and ND frame molded case circuit breakers (Power Mod modular metering)	A	same as above
Kit contents	(3)/(4) lugs with wire binding screws; (6)/(8) mounting screws/washers	A	same as above
Torque values	Mounting screw 228 lb-in; wire binding screws 375 lb-in	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00672	LK33500	Siemens	lug-kit	STATUS UNKNOWN

Power Mod lug kit for MD/ND frame breaker, 4-lug

OEM part number	LK33500	A	S585 p.1; oem_spec
Description	Breaker terminal lug kit, wire range 1/0-500 kcmil AL/CU	A	same as above
Breaker compatibility	MD and ND frame molded case circuit breakers (Power Mod modular metering)	A	same as above
Kit contents	(3)/(4) lugs with wire binding screws; (6)/(8) mounting screws/lockwashers	A	same as above
Torque values	Mounting screw 228 lb-in; wire binding screws 375 lb-in	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00674	LK33750	Siemens	lug-kit	STATUS UNKNOWN

Power Mod lug kit for MD/ND frame breaker, 4-lug

OEM part number	LK33750	A	S586 p.1; oem_spec
Description	Breaker terminal lug kit, wire range 500-750 kcmil AL/CU	A	same as above
Breaker compatibility	MD and ND frame molded case circuit breakers (Power Mod modular metering)	A	same as above
Kit contents	(3)/(4) lugs with wire binding screws; (6)/(8) mounting screws; (6) lockwashers	A	same as above
Torque values	Mounting screw 228 lb-in; wire binding screws 375 lb-in	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00676	LK34500	Siemens	lug-kit	STATUS UNKNOWN

Power Mod lug kit for MD/ND frame breaker, 4-lug

OEM part number	LK34500	A	S587 p.1; oem_spec
Description	Breaker terminal lug kit, wire range 250-500 kcmil AL/CU	A	same as above
Breaker compatibility	MD and ND frame molded case circuit breakers (Power Mod modular metering)	A	same as above
Kit contents	(3)/(4) lugs with wire binding screws; (6)/(8) mounting screws/washers	A	same as above
Torque values	Mounting screw 228 lb-in; wire binding screws 375 lb-in	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00502	TA2K8750	Siemens	lug-kit	STATUS UNKNOWN

MD/ND frame multi-cable pressure connector (2) 500-750 kcmil Cu/Al

OEM part number	TA2K8750	A	S528 p.1 Table 1; oem_spec
Description	Pressure wire connector (2) 500-750 kcmil Cu/Al; wire connector shield NDTS must be installed	A	same as above
Breaker compatibility	MD, ND, MF, NF, MM, NM frame	A	same as above
Torque values	Connector mounting 228 in-lb (19 ft-lb) [25.76 N-m]; binding screw per Table 1: '32 ft. lbs.' rows and '375 in. lbs. [42.37 N-m]' rows (table pairs P/K/H types with 32 ft-lb and N types with 375 in-lb as extracted; printed N-m value '4.34' inconsistent)	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		
Open question	*Verify Table 1 torque pairing per catalog number (32 ft-lb vs 375 in-lb) from PDF layout.*		

EDH-SIE-00503	TA2N8750	Siemens	lug-kit	STATUS UNKNOWN

MD/ND frame multi-cable pressure connector (2) 500-750 kcmil Cu/Al

OEM part number	TA2N8750	A	S528 p.1 Table 1; oem_spec
Description	Pressure wire connector (2) 500-750 kcmil Cu/Al; wire connector shield NDTS must be installed	A	same as above
Breaker compatibility	MD, ND, MF, NF, MM, NM frame	A	same as above
Torque values	Connector mounting 228 in-lb (19 ft-lb) [25.76 N-m]; binding screw per Table 1: '32 ft. lbs.' rows and '375 in. lbs. [42.37 N-m]' rows (table pairs P/K/H types with 32 ft-lb and N types with 375 in-lb as extracted; printed N-m value '4.34' inconsistent)	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		
Open question	*Verify Table 1 torque pairing per catalog number (32 ft-lb vs 375 in-lb) from PDF layout.*		

EDH-SIE-00498	TA3K350	Siemens	lug-kit	STATUS UNKNOWN

MD/ND (and KM) frame pressure wire connector (1-3) 300-350 kcmil Cu-Al

OEM part number	TA3K350	A	S527 pp.1-2 Table 1; oem_spec
Description	Pressure wire connector, wire range (1-3) 300-350 kcmil Cu-Al	A	same as above
Breaker compatibility	MM6, MMK, MD6, SMD6 ... (MD/ND family; sheet also lists mounting on SKM, SKMIII, KM, HN, CN for TA2K500/TA3K350)	A	same as above
Torque values	Set screw 375 in-lb [42.37 N-m]; connector mounting screws 7-9 ft-lb [9.5-12.2 N-m]	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		
Open question	*Exact type list per catalog number partly lost in text extraction; verify from PDF figure.*		

EDH-SIE-00505	TA3N8750	Siemens	lug-kit	STATUS UNKNOWN

MD/ND frame multi-cable pressure connector (3) 500-750 kcmil Cu/Al

OEM part number	TA3N8750	A	S528 p.1 Table 1; oem_spec
Description	Pressure wire connector (3) 500-750 kcmil Cu/Al; wire connector shield NDTS must be installed	A	same as above
Breaker compatibility	MD, ND, MF, NF, MM, NM frame	A	same as above
Torque values	Connector mounting 228 in-lb (19 ft-lb) [25.76 N-m]; binding screw per Table 1: '32 ft. lbs.' rows and '375 in. lbs. [42.37 N-m]' rows (table pairs P/K/H types with 32 ft-lb and N types with 375 in-lb as extracted; printed N-m value '4.34' inconsistent)	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		
Open question	*Verify Table 1 torque pairing per catalog number (32 ft-lb vs 375 in-lb) from PDF layout.*		

EDH-SIE-00504	TA3P8750	Siemens	lug-kit	STATUS UNKNOWN

MD/ND frame multi-cable pressure connector (3) 500-750 kcmil Cu/Al

OEM part number	TA3P8750	A	S528 p.1 Table 1; oem_spec
Description	Pressure wire connector (3) 500-750 kcmil Cu/Al; wire connector shield NDTS must be installed	A	same as above
Breaker compatibility	MD, ND, MF, NF, MM, NM frame	A	same as above
Torque values	Connector mounting 228 in-lb (19 ft-lb) [25.76 N-m]; binding screw per Table 1: '32 ft. lbs.' rows and '375 in. lbs. [42.37 N-m]' rows (table pairs P/K/H types with 32 ft-lb and N types with 375 in-lb as extracted; printed N-m value '4.34' inconsistent)	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		
Open question	*Verify Table 1 torque pairing per catalog number (32 ft-lb vs 375 in-lb) from PDF layout.*		

EDH-SIE-00506	TA4H500	Siemens	lug-kit	STATUS UNKNOWN

MD/ND frame multi-cable pressure connector (4) #2-500 kcmil Cu/Al

OEM part number	TA4H500	A	S528 p.1 Table 1; oem_spec
Description	Pressure wire connector (4) #2-500 kcmil Cu/Al; wire connector shield NDTS must be installed	A	same as above
Breaker compatibility	MD, ND, MF, NF, MM, NM frame	A	same as above
Torque values	Connector mounting 228 in-lb (19 ft-lb) [25.76 N-m]; binding screw per Table 1: '32 ft. lbs.' rows and '375 in. lbs. [42.37 N-m]' rows (table pairs P/K/H types with 32 ft-lb and N types with 375 in-lb as extracted; printed N-m value '4.34' inconsistent)	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		
Open question	*Verify Table 1 torque pairing per catalog number (32 ft-lb vs 375 in-lb) from PDF layout.*		

EDH-SIE-00501	TA4N8500	Siemens	lug-kit	STATUS UNKNOWN

MD/ND frame multi-cable pressure connector (4) #2-500 kcmil Cu/Al

OEM part number	TA4N8500	**A**	S528 p.1 Table 1; oem_spec
Description	Pressure wire connector (4) #2-500 kcmil Cu/Al; wire connector shield NDTS must be installed	**A**	same as above
Breaker compatibility	MD, ND, MF, NF, MM, NM frame	**A**	same as above
Torque values	Connector mounting 228 in-lb (19 ft-lb) [25.76 N-m]; binding screw per Table 1: '32 ft. lbs.' rows and '375 in. lbs. [42.37 N-m]' rows (table pairs P/K/H types with 32 ft-lb and N types with 375 in-lb as extracted; printed N-m value '4.34' inconsistent)	**A**	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		
Open question	*Verify Table 1 torque pairing per catalog number (32 ft-lb vs 375 in-lb) from PDF layout.*		

EDH-SIE-00500	TA4P8500	Siemens	lug-kit	STATUS UNKNOWN

MD/ND frame multi-cable pressure connector (4) #2-500 kcmil Cu/Al

OEM part number	TA4P8500	**A**	S528 p.1 Table 1; oem_spec
Description	Pressure wire connector (4) #2-500 kcmil Cu/Al; wire connector shield NDTS must be installed	**A**	same as above
Breaker compatibility	MD, ND, MF, NF, MM, NM frame	**A**	same as above
Torque values	Connector mounting 228 in-lb (19 ft-lb) [25.76 N-m]; binding screw per Table 1: '32 ft. lbs.' rows and '375 in. lbs. [42.37 N-m]' rows (table pairs P/K/H types with 32 ft-lb and N types with 375 in-lb as extracted; printed N-m value '4.34' inconsistent)	**A**	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		
Open question	*Verify Table 1 torque pairing per catalog number (32 ft-lb vs 375 in-lb) from PDF layout.*		

EDH-SIE-00499	TC3K350	Siemens	lug-kit	STATUS UNKNOWN

MD/ND (and KM) frame pressure wire connector (1-3) #1-350 kcmil Cu only

OEM part number	TC3K350	**A**	S527 pp.1-2 Table 1; oem_spec
Description	Pressure wire connector, wire range (1-3) #1-350 kcmil Cu only	**A**	same as above
Breaker compatibility	MM6, MMK, MD6, SMD6 ... (MD/ND family; sheet also lists mounting on SKM, SKMIII, KM, HN, CN for TA2K500/TA3K350)	**A**	same as above
Torque values	Set screw 375 in-lb [42.37 N-m]; connector mounting screws 7-9 ft-lb [9.5-12.2 N-m]	**A**	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		
Open question	*Exact type list per catalog number partly lost in text extraction; verify from PDF figure.*		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00280	**TA2N750**	Siemens TA2N750 lug, MD 500-800A (100% rated), 500-750 kcmil	MD family 500-800 A (100% rated) **A**	current

EDH-SIE-00280	TA2N750	Siemens	lug	CURRENT

Siemens TA2N750 lug, MD 500-800A (100% rated), 500-750 kcmil

OEM part number	TA2N750	A	S203, S204, S527 s6 p. 7-154; oem_spec
Description	Aluminum-body lug, 1-2 cables; used for 100% rated MD/ND frame breakers	A	S203, S204 s6 p. 7-154; oem_spec
	Pressure wire connector, wire range (2) 500-750 kcmil Cu-Al	A	S527 pp.1-2 Table 1; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-154; oem_spec
Breaker compatibility	MD family 500-800 A (100% rated)	A	same as above
	MM6, MMK, MD6, SMD6 ... (MD/ND family; sheet also lists mounting on SKM, SKMIII, KM, HN, CN for TA2K500/TA3K350)	A	S527 pp.1-2 Table 1; oem_spec
Kit contents	1 lug; wire range 1-2 x 500-750 kcmil Cu/Al	A	S203, S204 s6 p. 7-154; oem_spec
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Torque values	Set screw 375 in-lb [42.37 N-m]; connector mounting screws 7-9 ft-lb [9.5-12.2 N-m]	A	S527 pp.1-2 Table 1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-154; oem_spec
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		
Open question	*What is the relationship between TA2N750 (single, p. 7-154) and the 2TA2N8750/3TA2N8750 kits (MD page, p. 7-155)?*		
Open question	*Exact type list per catalog number partly lost in text extraction; verify from PDF figure.*		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00513	**PC5662**	MD frame plug-in adaptor, 2-pole	MD6, MM6, MMK, MFC, MFF, HMD6 ... (MD frame) A	unknown
EDH-SIE-00514	**PC5663**	MD frame plug-in adaptor, 3-pole	MD6, MM6, MMK, MFC, MFF, HMD6 ... (MD frame) A	unknown
EDH-SIE-00508	**PC5664**	MD/ND frame plug-in adaptor, 2-pole, line (bus)	MXD6, NXD6, HMXD6, MD6, MFC, MFF, MM6, MMK, SHMD6, SHND6, SCMD6, SCND6 A	unknown
EDH-SIE-00509	**PC5665**	MD/ND frame plug-in adaptor, 2-pole, load	MXD6, NXD6, HMXD6, MD6, MFC, MFF, MM6, MMK, SHMD6, SHND6, SCMD6, SCND6 A	unknown
EDH-SIE-00510	**PC5666**	MD/ND frame plug-in adaptor, 3-pole, line (bus)	MXD6, NXD6, HMXD6, MD6, MFC, MFF, MM6, MMK, SHMD6, SHND6, SCMD6, SCND6 A	unknown
EDH-SIE-00511	**PC5667**	MD/ND frame plug-in adaptor, 3-pole, load	MXD6, NXD6, HMXD6, MD6, MFC, MFF, MM6, MMK, SHMD6, SHND6, SCMD6, SCND6 A	unknown
EDH-SIE-00515	**PM5663**	MD frame plug-in adaptor, 3-pole	MD6, MM6, MMK, MFC, MFF, HMD6 ... (MD frame) A	unknown
EDH-SIE-00512	**PM5666**	MD/ND frame plug-in adaptor, 3-pole, line	MXD6, NXD6, HMXD6, MD6, MFC, MFF, MM6, MMK, SHMD6, SHND6, SCMD6, SCND6 A	unknown
EDH-SIE-00516	**TCM2**	MD frame replacement plug-in adapter, 2-pole	MD6, MM6, MMK, MFC, MFF, HMD6, CMD6, SMD6, SHMD6, SCMD6, MD6ETI, CMD6E A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00517	**TCM3**	MD frame replacement plug-in adapter, 3-pole	MD6, MM6, MMK, MFC, MFF, HMD6, CMD6, SMD6, SHMD6, SCMD6, MD6ETI, CMD6E A	unknown

EDH-SIE-00513	PC5662	Siemens	breaker-mounting-kit	STATUS UNKNOWN

MD frame plug-in adaptor, 2-pole

OEM part number	PC5662	A	S533 pp.1-4; oem_spec
Description	Plug-in adaptor (same cat. no. line and load); switchboard mounting pan PL9698 (16.41in, .438 dia holes, 1.50in)	A	same as above
Breaker compatibility	MD6, MM6, MMK, MFC, MFF, HMD6 ... (MD frame)	A	same as above
Poles	2-pole	A	same as above
Torque values	Mounting pan hardware 216 in-lb (18 ft-lb); breaker bolts 72 in-lb (6 ft-lb) [8.13 N-m]; stud hex nuts 2400 in-lb (200 ft-lb) [271.1 N-m]; terminal shield screws 12 in-lb	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00514	PC5663	Siemens	breaker-mounting-kit	STATUS UNKNOWN

MD frame plug-in adaptor, 3-pole

OEM part number	PC5663	A	S533 pp.1-4; oem_spec
Description	Plug-in adaptor (same cat. no. line and load); switchboard mounting pan PL9698 (16.41in, .438 dia holes, 1.50in)	A	same as above
Breaker compatibility	MD6, MM6, MMK, MFC, MFF, HMD6 ... (MD frame)	A	same as above
Poles	3-pole	A	same as above
Torque values	Mounting pan hardware 216 in-lb (18 ft-lb); breaker bolts 72 in-lb (6 ft-lb) [8.13 N-m]; stud hex nuts 2400 in-lb (200 ft-lb) [271.1 N-m]; terminal shield screws 12 in-lb	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00508	PC5664	Siemens	breaker-mounting-kit	STATUS UNKNOWN

MD/ND frame plug-in adaptor, 2-pole, line (bus)

OEM part number	PC5664	A	S532 pp.1-4; oem_spec
Description	Plug-in adaptor (mounting block with finger clusters); switchboard plate PL9699	A	same as above
Breaker compatibility	MXD6, NXD6, HMXD6, MD6, MFC, MFF, MM6, MMK, SHMD6, SHND6, SCMD6, SCND6, HNXD6; MXD6ETI, CMD6ETI, MD6ETI, ND6ETI	A	same as above
Poles	2-pole	A	same as above
Torque values	Mounting block / finger-cluster nuts 216 in-lb (18 ft-lb) [24.40 N-m]; breaker bolts 96 in-lb (8 ft-lb); terminal shield screws 12 in-lb	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00509	PC5665	Siemens	breaker-mounting-kit	STATUS UNKNOWN

MD/ND frame plug-in adaptor, 2-pole, load

OEM part number	PC5665	A	S532 pp.1-4; oem_spec
Description	Plug-in adaptor (mounting block with finger clusters); switchboard plate PL9699	A	same as above
Breaker compatibility	MXD6, NXD6, HMXD6, MD6, MFC, MFF, MM6, MMK, SHMD6, SHND6, SCMD6, SCND6, HNXD6; MXD6ETI, CMD6ETI, MD6ETI, ND6ETI	A	same as above
Poles	2-pole	A	same as above
Torque values	Mounting block / finger-cluster nuts 216 in-lb (18 ft-lb) [24.40 N-m]; breaker bolts 96 in-lb (8 ft-lb); terminal shield screws 12 in-lb	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00510	PC5666	Siemens	breaker-mounting-kit	STATUS UNKNOWN

MD/ND frame plug-in adaptor, 3-pole, line (bus)

OEM part number	PC5666	A	S532 pp.1-4; oem_spec
Description	Plug-in adaptor (mounting block with finger clusters); switchboard plate PL9699	A	same as above
Breaker compatibility	MXD6, NXD6, HMXD6, MD6, MFC, MFF, MM6, MMK, SHMD6, SHND6, SCMD6, SCND6, HNXD6; MXD6ETI, CMD6ETI, MD6ETI, ND6ETI	A	same as above
Poles	3-pole	A	same as above
Torque values	Mounting block / finger-cluster nuts 216 in-lb (18 ft-lb) [24.40 N-m]; breaker bolts 96 in-lb (8 ft-lb); terminal shield screws 12 in-lb	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00511	PC5667	Siemens	breaker-mounting-kit	STATUS UNKNOWN

MD/ND frame plug-in adaptor, 3-pole, load

OEM part number	PC5667	A	S532 pp.1-4; oem_spec
Description	Plug-in adaptor (mounting block with finger clusters); switchboard plate PL9699	A	same as above
Breaker compatibility	MXD6, NXD6, HMXD6, MD6, MFC, MFF, MM6, MMK, SHMD6, SHND6, SCMD6, SCND6, HNXD6; MXD6ETI, CMD6ETI, MD6ETI, ND6ETI	A	same as above
Poles	3-pole	A	same as above
Torque values	Mounting block / finger-cluster nuts 216 in-lb (18 ft-lb) [24.40 N-m]; breaker bolts 96 in-lb (8 ft-lb); terminal shield screws 12 in-lb	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00515	PM5663	Siemens	breaker-mounting-kit	STATUS UNKNOWN

MD frame plug-in adaptor, 3-pole

OEM part number	PM5663	A	S533 pp.1-4; oem_spec
Description	Plug-in adaptor (same cat. no. line and load); switchboard mounting pan PL9698 (16.41in, .438 dia holes, 1.50in)	A	same as above
Breaker compatibility	MD6, MM6, MMK, MFC, MFF, HMD6 ... (MD frame)	A	same as above
Poles	3-pole	A	same as above
Torque values	Mounting pan hardware 216 in-lb (18 ft-lb); breaker bolts 72 in-lb (6 ft-lb) [8.13 N-m]; stud hex nuts 2400 in-lb (200 ft-lb) [271.1 N-m]; terminal shield screws 12 in-lb	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00512	PM5666	Siemens	breaker-mounting-kit	STATUS UNKNOWN

MD/ND frame plug-in adaptor, 3-pole, line

OEM part number	PM5666	A	S532 pp.1-4; oem_spec
Description	Plug-in adaptor (mounting block with finger clusters); switchboard plate PL9699	A	same as above
Breaker compatibility	MXD6, NXD6, HMXD6, MD6, MFC, MFF, MM6, MMK, SHMD6, SHND6, SCMD6, SCND6, HNXD6; MXD6ETI, CMD6ETI, MD6ETI, ND6ETI	A	same as above
Poles	3-pole	A	same as above
Torque values	Mounting block / finger-cluster nuts 216 in-lb (18 ft-lb) [24.40 N-m]; breaker bolts 96 in-lb (8 ft-lb); terminal shield screws 12 in-lb	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00516	TCM2	Siemens	breaker-mounting-kit	STATUS UNKNOWN

MD frame replacement plug-in adapter, 2-pole

OEM part number	TCM2	A	S534 p.1; oem_spec
Breaker compatibility	MD6, MM6, MMK, MFC, MFF, HMD6, CMD6, SMD6, SHMD6, SCMD6, MD6ETI, CMD6ETI, MXD6 with plug-in assemblies PC5662, PC5663, PM5663	A	same as above
Poles	2-pole	A	same as above
Torque values	5/16-18 bolts 72 in-lb (6 ft-lb)	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00517	TCM3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

MD frame replacement plug-in adapter, 3-pole

OEM part number	TCM3	A	S534 p.1; oem_spec
Breaker compatibility	MD6, MM6, MMK, MFC, MFF, HMD6, CMD6, SMD6, SHMD6, SCMD6, MD6ETI, CMD6ETI, MXD6 with plug-in assemblies PC5662, PC5663, PM5663	A	same as above
Poles	3-pole	A	same as above
Torque values	5/16-18 bolts 72 in-lb (6 ft-lb)	A	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00298	**MDTERMSHIELD**	Siemens MDTERMSHIELD terminal shield, MD/ND/PD/RD 3-pole	MD, ND, PD, RD 3-pole A	current
EDH-SIE-00289	**NDTS**	Siemens NDTS wire lug shield / end barrier, MD/ND	MD6, MXD6, HMD6, HMXD6, CMD6, ND6, NXD6, CND6 families A	current

EDH-SIE-00298	MDTERMSHIELD	Siemens	barrier	CURRENT

Siemens MDTERMSHIELD terminal shield, MD/ND/PD/RD 3-pole

OEM part number	MDTERMSHIELD	A	S203, S204 s6 p. 7-160; oem_spec
Description	Terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MD, ND, PD, RD 3-pole	A	same as above
Kit contents	std pkg 1	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6), Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6), Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00289	NDTS	Siemens	barrier	CURRENT

Siemens NDTS wire lug shield / end barrier, MD/ND

OEM part number	NDTS	A	S203, S204, S529 s6 MD/ND pages; s6 p. 7-154; oem_spec
Description	Wire lug shield (NDTS); required when oversized lugs are used; included in the 2TA*/3TA* connector kits as the 'NDTS end barrier'. Breaker length increases to 24 in with lug shields (MD/ND dimension table).	A	S203, S204 s6 MD/ND pages; s6 p. 7-154; oem_spec
	Wire connector shield slid onto end of breaker; must be installed when TA2K8750, TA3P8750, TA4P8500, TA2N8750, TA3N8750 or TA4N8500 connectors are used; wire must extend 4in from lug before bending	A	S529 p.1; oem_spec
Application	accessory	A	S203, S204 s6 MD/ND pages; s6 p. 7-154; oem_spec
Breaker compatibility	MD6, MXD6, HMD6, HMXD6, CMD6, ND6, NXD6, CND6 families	A	same as above
	MD, ND, MM & NM frame breakers, MCIs and switches	A	S529 p.1; oem_spec
Dimensions	Breaker overall length 24 in with lug shields vs 16 in without (W 9, D 6, D1 8.25)	A	S203 MD page dimension table; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 MD/ND pages; s6 p. 7-154; oem_spec
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Kit contents, Material, Torque values		
Open question	*Is NDTS orderable on its own, or only as part of the kits?*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00312	**RS5785**	Siemens RS5785 rear-connecting stud, All MD, ND, long 8.00 in	All MD, ND (1200 A) A	current
EDH-SIE-00311	**RS5786**	Siemens RS5786 rear-connecting stud, All MD, ND, short 5.50 in	All MD, ND (1200 A) A	current

EDH-SIE-00312	RS5785	Siemens	breaker-accessory	CURRENT

Siemens RS5785 rear-connecting stud, All MD, ND, long 8.00 in

OEM part number	RS5785	A	S203, S204, S530 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
	Rear connecting strap (long); long RS5785 and short RS5786 may be used on adjacent poles or alternated as required, line and load	A	S530 pp.1-4; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-165; oem_spec
Breaker compatibility	All MD, ND (1200 A)	A	same as above
	MD6, ND6, HMD6, HND6, MFF, MFC, SHND6, SCMD6, SCND6; MD6ETI, CMD6ETI; MXD6, NXD6	A	S530 pp.1-4; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
Dimensions	Extension behind breaker 8.00 in	A	S203 p. 7-165; oem_spec
	5.66in, 1.75in; mounting panel template from 1/2in thick material [228.6 mm dim]	A	S530 pp.1-4; oem_spec
Torque values	Strap-to-breaker screws 72 in-lb [4.43 N-m (sic)]; socket head cap screws 96 in-lb [5.90 N-m (sic)]; trim/shield screws 12 in-lb	A	same as above
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-SIE-00311	RS5786	Siemens	breaker-accessory	CURRENT

Siemens RS5786 rear-connecting stud, All MD, ND, short 5.50 in

OEM part number	RS5786	A	S203, S204, S530 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	S203, S204 s6 p. 7-165; oem_spec
	Rear connecting strap (short); long RS5785 and short RS5786 may be used on adjacent poles or alternated as required, line and load	A	S530 pp.1-4; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-165; oem_spec
Breaker compatibility	All MD, ND (1200 A)	A	same as above
	MD6, ND6, HMD6, HND6, MFF, MFC, SHND6, SCMD6, SCND6; MD6ETI, CMD6ETI; MXD6, NXD6	A	S530 pp.1-4; oem_spec
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	S203, S204 s6 p. 7-165; oem_spec
Dimensions	Extension behind breaker 5.50 in	A	S203 p. 7-165; oem_spec
	5.66in, 1.75in; mounting panel template from 1/2in thick material [228.6 mm dim]	A	S530 pp.1-4; oem_spec
Torque values	Strap-to-breaker screws 72 in-lb [4.43 N-m (sic)]; socket head cap screws 96 in-lb [5.90 N-m (sic)]; trim/shield screws 12 in-lb	A	same as above
Status	current (Listed; built to order)	B	S203 p. 7-165; oem_spec
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material		

Breaker family Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00664	**CCN1200**	ND frame 1200A compression lug kit	ND6, HND6, CND6, SND6, SHND6, SCND6 A	unknown
EDH-SIE-00292	**CCN1200K2**	Siemens CCN1200K2 compression lug kit, ND 2-pole	N(X)D6, HN(X)D6, CND6, SND6-B, SHND6-B, SCND6-B 900-1200 A, 2-pole A	current
EDH-SIE-00293	**CCN1200K3**	Siemens CCN1200K3 compression lug kit, ND 3-pole	ND family 900-1200 A, 3-pole A	current

EDH-SIE-00664	CCN1200	Siemens	lug-kit	STATUS UNKNOWN

ND frame 1200A compression lug kit

OEM part number	CCN1200	A	S579 pp.1-3; oem_spec
Description	Compression lugs; strip insulation 1-13/16in	A	same as above
Breaker compatibility	ND6, HND6, CND6, SND6, SHND6, SCND6	A	same as above
Kit contents	(2) LH crimp lugs, (2) RH crimp lugs, (2) spacers, (2) screws, (2) conical washers - 1200 A neutral or single pole	A	same as above
Cross-links	Breakers: Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Material, Status, Torque values		

EDH-SIE-00292	CCN1200K2	Siemens	lug-kit	CURRENT

Siemens CCN1200K2 compression lug kit, ND 2-pole

OEM part number	CCN1200K2	A	S203, S204, S579 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 2-pole breaker	A	S203, S204 s6 p. 7-155; oem_spec
	Compression lugs; strip insulation 1-13/16in	A	S579 pp.1-3; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-155; oem_spec
Breaker compatibility	N(X)D6, HN(X)D6, CND6, SND6-B, SHND6-B, SCND6-B 900-1200 A, 2-pole	A	same as above
	ND6, HND6, CND6, SND6, SHND6, SCND6	A	S579 pp.1-3; oem_spec
Kit contents	8 lugs; wire range 500 kcmil	A	S203, S204 s6 p. 7-155; oem_spec
	(4) LH, (4) RH crimp lugs, (4) spacers, (4) screws, (4) conical washers, (1) wire connector shield - 2-pole	A	S579 pp.1-3; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00293	CCN1200K3	Siemens	lug-kit	CURRENT

Siemens CCN1200K3 compression lug kit, ND 3-pole

OEM part number	CCN1200K3	A	S203, S204, S579 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 3-pole breaker	A	S203, S204 s6 p. 7-155; oem_spec
	Compression lugs; strip insulation 1-13/16in	A	S579 pp.1-3; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-155; oem_spec
Breaker compatibility	ND family 900-1200 A, 3-pole	A	same as above
	ND6, HND6, CND6, SND6, SHND6, SCND6	A	S579 pp.1-3; oem_spec
Kit contents	12 lugs; wire range 500 kcmil	A	S203, S204 s6 p. 7-155; oem_spec
	(6) LH, (6) RH crimp lugs, (6) spacers, (6) screws, (6) conical washers, (1) wire connector shield - 3-pole	A	S579 pp.1-3; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00518	**TCN2**	MD/ND frame replacement plug-in adapter, 2-pole	MD, ND, MM, NM, MF & NF frame (incl. ND6ETI) with plug-in mounting ass A	unknown
EDH-SIE-00519	**TCN3**	MD/ND frame replacement plug-in adapter, 3-pole	MD, ND, MM, NM, MF & NF frame (incl. ND6ETI) with plug-in mounting ass A	unknown

EDH-SIE-00518	TCN2	Siemens	breaker-mounting-kit	STATUS UNKNOWN

MD/ND frame replacement plug-in adapter, 2-pole

OEM part number	TCN2	**A**	S535 p.1; oem_spec
Breaker compatibility	MD, ND, MM, NM, MF & NF frame (incl. ND6ETI) with plug-in mounting assemblies PC5664, PC5666, PM5666	**A**	same as above
Poles	2-pole	**A**	same as above
Torque values	96 in-lb	**A**	same as above
Cross-links	Breakers: Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00519	TCN3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

MD/ND frame replacement plug-in adapter, 3-pole

OEM part number	TCN3	**A**	S535 p.1; oem_spec
Breaker compatibility	MD, ND, MM, NM, MF & NF frame (incl. ND6ETI) with plug-in mounting assemblies PC5664, PC5666, PM5666	**A**	same as above
Poles	3-pole	**A**	same as above
Torque values	96 in-lb	**A**	same as above
Cross-links	Breakers: Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Breaker family Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00294	**TA5P600**	Siemens TA5P600 lug, PD 1200-1600A, 1-5 x 300-600 kcmil	PD6, HPD6, CPD6, PXD6, HPXD6, SPD6-B, SHPD6-B 1200-1600 A **A**	current
EDH-SIE-00295	**TA6R600**	Siemens TA6R600 lug, PD/RD 1200-2000A, 1-6 x 300-600 kcmil	PD6, PXD6, HPD6, HPXD6, SPD6-B, SHPD6-B, RD6, RXD6, HRD6, HRXD6 1200-2 **A**	current
EDH-SIE-00296	**TC5R600**	Siemens TC5R600 copper lug, RD 1600-2000A (also 100% PD)	R(X)D6, HR(X)D6 1600-2000 A; 100% rated PXD6/HPXD6 **A**	current

EDH-SIE-00294	TA5P600	Siemens	lug	CURRENT

Siemens TA5P600 lug, PD 1200-1600A, 1-5 x 300-600 kcmil

OEM part number	TA5P600	A	S203, S204, S580 s6 p. 7-154; PD page; oem_spec
Description	Aluminum-body lug; standard PD frame lug, 6 required per breaker	A	S203, S204 s6 p. 7-154; PD page; oem_spec
	(1-5) 300-400 kcmil Cu-Al (set screw 600 in-lb) or (1-5) 500-600 kcmil Cu-Al (780 in-lb); front or rear mounted on mounting block	A	S580 p.1; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-154; PD page; oem_spec
Breaker compatibility	PD6, HPD6, CPD6, PXD6, HPXD6, SPD6-B, SHPD6-B 1200-1600 A	A	same as above
	PD and PM frame breakers and switches	A	S580 p.1; oem_spec
Kit contents	1 lug (6 required); wire range 1-5 x 300-600 kcmil Cu/Al	A	S203, S204 s6 p. 7-154; PD page; oem_spec
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Torque values	Set screw 600 in-lb (300-400 kcmil) / 780 in-lb (500-600 kcmil); mounting bolts 300 in-lb	A	S580 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-154; PD page; oem_spec
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

EDH-SIE-00295	TA6R600	Siemens	lug	CURRENT

Siemens TA6R600 lug, PD/RD 1200-2000A, 1-6 x 300-600 kcmil

OEM part number	TA6R600	A	S203, S204, S537 s6 p. 7-154; oem_spec
Description	Aluminum-body lug, 1-6 cables	A	S203, S204 s6 p. 7-154; oem_spec
	(1-6) 300-600 kcmil Cu-Al	A	S537 p.1 Table 1; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-154; oem_spec
Breaker compatibility	PD6, PXD6, HPD6, HPXD6, SPD6-B, SHPD6-B, RD6, RXD6, HRD6, HRXD6 1200-2000 A	A	same as above
	PD, PM and RD frame (PD6, HPD6 ...)	A	S537 p.1 Table 1; oem_spec
Kit contents	1 lug; wire range 1-6 x 300-600 kcmil Cu/Al	A	S203, S204 s6 p. 7-154; oem_spec
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Torque values	Set screws 600 in-lb; mounting 375 in-lb; RD frame (RD6 ...) extra bolt with flat/lock washer 225 in-lb	A	S537 p.1 Table 1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-154; oem_spec
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6), Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

EDH-SIE-00296	TC5R600	Siemens	lug	CURRENT

Siemens TC5R600 copper lug, RD 1600-2000A (also 100% PD)

OEM part number	TC5R600	A	S203, S204, S536 s6 p. 7-155; PD page; oem_spec
Description	Copper mechanical lug; standard RD frame lug; required for 100% rated PD breakers	A	S203, S204 s6 p. 7-155; PD page; oem_spec
	(1-5) 300-600 kcmil Cu only	A	S536 p.1 Table 1; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-155; PD page; oem_spec
Breaker compatibility	R(X)D6, HR(X)D6 1600-2000 A; 100% rated PXD6/HPXD6	A	same as above
	I-T-E PD, PM and RD frame (PD6 ...)	A	S536 p.1 Table 1; oem_spec
Kit contents	1 lug (6 per breaker); wire range 1-5 x 300-600 kcmil Cu	A	S203, S204 s6 p. 7-155; PD page; oem_spec
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Torque values	Set screws 600 in-lb; mounting 375 in-lb	A	S536 p.1 Table 1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; PD page; oem_spec
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6), Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00520	**MB9301**	Connect-All mounting block assembly, PD frame	PD6, HPD6, PXD6, HPXD6, CPD6 (PD); RD6, HRD6, RXD6 (RD); PM6, PMK (PM) A	unknown
EDH-SIE-00522	**MM9301**	Connect-All mounting block assembly, PM frame	PD6, HPD6, PXD6, HPXD6, CPD6 (PD); RD6, HRD6, RXD6 (RD); PM6, PMK (PM) A	unknown

EDH-SIE-00520	MB9301	Siemens	breaker-mounting-kit	STATUS UNKNOWN

Connect-All mounting block assembly, PD frame

OEM part number	MB9301	A	S538 pp.1-2; oem_spec
Description	Connect-All mounting block assembly; customer provides mounting supports; re-uses four 3/8x1-1/2 hex head bolts, nuts and washers from breaker	A	same as above
Breaker compatibility	PD6, HPD6, PXD6, HPXD6, CPD6 (PD); RD6, HRD6, RXD6 (RD); PM6, PMK (PM)	A	same as above
Dimensions	3.06in (mounting figures 2 and 3)	A	same as above
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Kit contents, Material, Status, Torque values		

EDH-SIE-00522	MM9301	Siemens	breaker-mounting-kit	STATUS UNKNOWN

Connect-All mounting block assembly, PM frame

OEM part number	MM9301	A	S538 pp.1-2; oem_spec
Description	Connect-All mounting block assembly; customer provides mounting supports; re-uses four 3/8x1-1/2 hex head bolts, nuts and washers from breaker	A	same as above
Breaker compatibility	PD6, HPD6, PXD6, HPXD6, CPD6 (PD); RD6, HRD6, RXD6 (RD); PM6, PMK (PM)	A	same as above
Dimensions	3.06in (mounting figures 2 and 3)	A	same as above
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Kit contents, Material, Status, Torque values		

Terminal Shield

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00524	**PRDBS1**	PD frame rear terminal barrier / connector strap & shield kit	PD frame breakers, MCIs and molded case switches **A**	unknown

EDH-SIE-00524	PRDBS1	Siemens	terminal-shield	STATUS UNKNOWN

PD frame rear terminal barrier / connector strap & shield kit

OEM part number	PRDBS1	**A**	S539 p.1; oem_spec
Application	Connects breaker to customer busway (rear terminal barrier)	**A**	same as above
Breaker compatibility	PD frame breakers, MCIs and molded case switches	**A**	same as above
Kit contents	Connector straps (item 4), M8x50mm screws (item 1), spring washers (item 2), nut plate (item 3), terminal shield (item 6), rear terminal barrier (item 8)	**A**	same as above
Torque values	M8x50 screws 24 N-m (212 in-lb); 20-22 in-lb (cover)	**A**	same as above
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Dimensions, Material, Status		

Breaker family Sentron RD (RD6, RXD6, HRD6, HRXD6)

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00521	**MBR9302**	Connect-All mounting block assembly, RD frame	PD6, HPD6, PXD6, HPXD6, CPD6 (PD); RD6, HRD6, RXD6 (RD); PM6, PMK (PM) **A**	unknown
EDH-SIE-00523	**MM9302**	Connect-All mounting block assembly, PM frame	PD6, HPD6, PXD6, HPXD6, CPD6 (PD); RD6, HRD6, RXD6 (RD); PM6, PMK (PM) **A**	unknown

EDH-SIE-00521	MBR9302	Siemens	breaker-mounting-kit	STATUS UNKNOWN

Connect-All mounting block assembly, RD frame

OEM part number	MBR9302	**A**	S538 pp.1-2; oem_spec
Description	Connect-All mounting block assembly; customer provides mounting supports; re-uses four 3/8x1-1/2 hex head bolts, nuts and washers from breaker	**A**	same as above
Breaker compatibility	PD6, HPD6, PXD6, HPXD6, CPD6 (PD); RD6, HRD6, RXD6 (RD); PM6, PMK (PM)	**A**	same as above
Dimensions	3.06in (mounting figures 2 and 3)	**A**	same as above
Cross-links	Breakers: Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Kit contents, Material, Status, Torque values		

EDH-SIE-00523	MM9302	Siemens	breaker-mounting-kit	STATUS UNKNOWN

Connect-All mounting block assembly, PM frame

OEM part number	MM9302	**A**	S538 pp.1-2; oem_spec
Description	Connect-All mounting block assembly; customer provides mounting supports; re-uses four 3/8x1-1/2 hex head bolts, nuts and washers from breaker	**A**	same as above
Breaker compatibility	PD6, HPD6, PXD6, HPXD6, CPD6 (PD); RD6, HRD6, RXD6 (RD); PM6, PMK (PM)	**A**	same as above
Dimensions	3.06in (mounting figures 2 and 3)	**A**	same as above
Cross-links	Breakers: Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Kit contents, Material, Status, Torque values		

Breaker family Sentron VL (DG, FG, JG, LG, MG, NG)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00632	**12CLN500**	VL NG compression lug kit 500 kcmil (12 lugs)	Sentron VL frame NG **A**	unknown
EDH-SIE-00624	**2TA3NG750**	VL NG 3-cable 750 lug, 2-pack	Sentron VL frame NG **A**	unknown
EDH-SIE-00627	**2TA4NG500**	VL NG 4-cable 500 lug, 2-pack	Sentron VL frame NG **A**	unknown
EDH-SIE-00602	**3TA12JG04**	VL JG power distribution connector 12-wire, 3-pack	Sentron VL frame JG **A**	unknown
EDH-SIE-00623	**3TA1CG30**	VL CG Al/Cu lug, 3-pack	Sentron VL frame CG **A**	unknown
EDH-SIE-00607	**3TA1DG30**	VL DG Al/Cu lug, 3-pack	Sentron VL frame DG **A**	unknown
EDH-SIE-00592	**3TA3DG02**	VL DG power 3-wire distribution connector, 3-pack	Sentron VL frame DG **A**	unknown
EDH-SIE-00596	**3TA3FG20**	VL FG power 3-wire distribution connector, 3-pack	Sentron VL frame FG **A**	unknown
EDH-SIE-00625	**3TA3NG750**	VL NG 3-cable 750 lug, 3-pack	Sentron VL frame NG **A**	unknown
EDH-SIE-00628	**3TA4NG500**	VL NG 4-cable 500 lug, 3-pack	Sentron VL frame NG **A**	unknown
EDH-SIE-00630	**3TA4NG500H**	VL NG 4-cable 500 lug H, 3-pack	Sentron VL frame NG **A**	unknown
EDH-SIE-00594	**3TA6DG04**	VL DG power 6-wire distribution connector, 3-pack	Sentron VL frame DG **A**	unknown
EDH-SIE-00598	**3TA6FG04**	VL FG power 6-wire distribution connector, 3-pack	Sentron VL frame FG **A**	unknown
EDH-SIE-00600	**3TA6JG20**	VL JG power distribution connector 6-wire, 3-pack	Sentron VL frame JG **A**	unknown
EDH-SIE-00637	**3TA6PG750**	VL PG 6-cable 750 kcmil Al lug, 3-pack	Sentron VL frame PG **A**	unknown
EDH-SIE-00615	**3TAW1FG350**	VL FG Al/Cu lug, 3-pack	Sentron VL frame FG **A**	unknown
EDH-SIE-00610	**3TC1DG30**	VL DG Cu lug, 3-pack	Sentron VL frame DG **A**	unknown
EDH-SIE-00631	**3TC4NG500**	VL NG 4-cable 500 Cu lug, 3-pack	Sentron VL frame NG **A**	unknown
EDH-SIE-00618	**3TCW1FG350**	VL FG Cu lug, 3-pack	Sentron VL frame FG **A**	unknown
EDH-SIE-00622	**3TW1CG20**	VL CG wrap-around terminal, 3-pack	Sentron VL frame CG **A**	unknown
EDH-SIE-00604	**3TW1DG20**	VL DG wrap-around terminal, 3-pack	Sentron VL frame DG **A**	unknown
EDH-SIE-00612	**3TW1FG350**	VL FG wrap-around terminal, 3-pack	Sentron VL frame FG **A**	unknown
EDH-SIE-00620	**3TW1JG600**	VL JG wrap-around terminal 600, 3-pack	Sentron VL frame JG **A**	unknown
EDH-SIE-00608	**4TA1DG30**	VL DG Al/Cu lug, 4-pack	Sentron VL frame DG **A**	unknown
EDH-SIE-00626	**4TA3NG750**	VL NG 3-cable 750 lug, 4-pack	Sentron VL frame NG **A**	unknown
EDH-SIE-00629	**4TA4NG500**	VL NG 4-cable 500 lug, 4-pack	Sentron VL frame NG **A**	unknown
EDH-SIE-00616	**4TAW1FG350**	VL FG Al/Cu lug, 4-pack	Sentron VL frame FG **A**	unknown
EDH-SIE-00605	**4TW1DG20**	VL DG wrap-around terminal, 4-pack	Sentron VL frame DG **A**	unknown
EDH-SIE-00613	**4TW1FG350**	VL FG wrap-around terminal, 4-pack	Sentron VL frame FG **A**	unknown
EDH-SIE-00621	**4TW1JG600**	VL JG wrap-around terminal 600, 4-pack	Sentron VL frame JG **A**	unknown
EDH-SIE-00601	**TA12JG04**	VL JG power distribution connector 12-wire, single	Sentron VL frame JG **A**	unknown
EDH-SIE-00606	**TA1DG30**	VL DG Al/Cu lug (single)	Sentron VL frame DG **A**	unknown
EDH-SIE-00591	**TA3DG02**	VL DG power 3-wire distribution connector, single	Sentron VL frame DG **A**	unknown
EDH-SIE-00595	**TA3FG20**	VL FG power 3-wire distribution connector, single	Sentron VL frame FG **A**	unknown
EDH-SIE-00593	**TA6DG04**	VL DG power 6-wire distribution connector, single	Sentron VL frame DG **A**	unknown
EDH-SIE-00597	**TA6FG04**	VL FG power 6-wire distribution connector, single	Sentron VL frame FG **A**	unknown
EDH-SIE-00599	**TA6JG20**	VL JG power distribution connector 6-wire, single	Sentron VL frame JG **A**	unknown
EDH-SIE-00636	**TA6PG750**	VL PG 6-cable 750 kcmil Al lug (single)	Sentron VL frame PG **A**	unknown
EDH-SIE-00614	**TAW1FG350**	VL FG Al/Cu lug 350 (single)	Sentron VL frame FG **A**	unknown
EDH-SIE-00609	**TC1DG30**	VL DG Cu lug (single)	Sentron VL frame DG **A**	unknown
EDH-SIE-00617	**TCW1FG350**	VL FG Cu lug (single)	Sentron VL frame FG **A**	unknown
EDH-SIE-00603	**TW1DG20**	VL DG box/wrap-around terminal 20 (single)	Sentron VL frame DG **A**	unknown
EDH-SIE-00611	**TW1FG350**	VL FG wrap-around terminal 350 (single)	Sentron VL frame FG **A**	unknown
EDH-SIE-00619	**TW1JG600**	VL JG wrap-around terminal 600, single	Sentron VL frame JG **A**	unknown

EDH-SIE-00632	12CLN500	Siemens	lug-kit	STATUS UNKNOWN

VL NG compression lug kit 500 kcmil (12 lugs)

OEM part number	12CLN500	A	S568 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9750-4TM31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	228 lb-in [25.8 Nm]; covers 11 lb-in	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00624	2TA3NG750	Siemens	lug-kit	STATUS UNKNOWN

VL NG 3-cable 750 lug, 2-pack

OEM part number	2TA3NG750	A	S567 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9775-4TG21 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	Binding 375 lb-in; mounting 212 lb-in; covers 11 lb-in (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00627	2TA4NG500	Siemens	lug-kit	STATUS UNKNOWN

VL NG 4-cable 500 lug, 2-pack

OEM part number	2TA4NG500	A	S567 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9750-4TH21 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	Binding 375 lb-in; mounting 212 lb-in; covers 11 lb-in (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00602	3TA12JG04	Siemens	lug-kit	STATUS UNKNOWN

VL JG power distribution connector 12-wire, 3-pack

OEM part number	3TA12JG04	A	S562 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9404-4TP31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	Printed values: 35, 40, 50, 120, 133 lb-in [4-15 Nm]; covers 11 lb-in	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00623	3TA1CG30	Siemens	lug-kit	STATUS UNKNOWN

VL CG Al/Cu lug, 3-pack

OEM part number	3TA1CG30	A	S566 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9130-4TD31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame CG	A	same as above
Torque values	Printed 4, 5.5, 8, 13.5 Nm	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00607	3TA1DG30	Siemens	lug-kit	STATUS UNKNOWN

VL DG Al/Cu lug, 3-pack

OEM part number	3TA1DG30	A	S563 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9230-4TD31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values 35, 50, 70, 120 lb-in [4-13.5 Nm] (per wire size)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00592	3TA3DG02	Siemens	lug-kit	STATUS UNKNOWN

VL DG power 3-wire distribution connector, 3-pack

OEM part number	3TA3DG02	A	S561 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9202-4TP31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values: 35 lb-in [4 Nm], 45 lb-in [5 Nm], 50 lb-in [5.6 Nm], 60 lb-in, Al 140 lb-in [15.5 Nm] (per-size mapping in table)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00596	3TA3FG20	Siemens	lug-kit	STATUS UNKNOWN

VL FG power 3-wire distribution connector, 3-pack

OEM part number	3TA3FG20	A	S561 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9302-4TP31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Printed values: 35 lb-in [4 Nm], 45 lb-in [5 Nm], 50 lb-in [5.6 Nm], 60 lb-in, Al 140 lb-in [15.5 Nm] (per-size mapping in table)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00625	3TA3NG750	Siemens	lug-kit	STATUS UNKNOWN

VL NG 3-cable 750 lug, 3-pack

OEM part number	3TA3NG750	A	S567 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9775-4TG31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	Binding 375 lb-in; mounting 212 lb-in; covers 11 lb-in (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00628	3TA4NG500	Siemens	lug-kit	STATUS UNKNOWN

VL NG 4-cable 500 lug, 3-pack

OEM part number	3TA4NG500	A	S567 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9750-4TH31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	Binding 375 lb-in; mounting 212 lb-in; covers 11 lb-in (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00630	3TA4NG500H	Siemens	lug-kit	STATUS UNKNOWN

VL NG 4-cable 500 lug H, 3-pack

OEM part number	3TA4NG500H	A	S567 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9750-4TK31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	Binding 375 lb-in; mounting 212 lb-in; covers 11 lb-in (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00594	3TA6DG04	Siemens	lug-kit	STATUS UNKNOWN

VL DG power 6-wire distribution connector, 3-pack

OEM part number	3TA6DG04	A	S561 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9204-4TP31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values: 35 lb-in [4 Nm], 45 lb-in [5 Nm], 50 lb-in [5.6 Nm], 60 lb-in, Al 140 lb-in [15.5 Nm] (per-size mapping in table)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00598	3TA6FG04	Siemens	lug-kit	STATUS UNKNOWN

VL FG power 6-wire distribution connector, 3-pack

OEM part number	3TA6FG04	A	S561 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9304-4TP31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Printed values: 35 lb-in [4 Nm], 45 lb-in [5 Nm], 50 lb-in [5.6 Nm], 60 lb-in, Al 140 lb-in [15.5 Nm] (per-size mapping in table)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00600	3TA6JG20	Siemens	lug-kit	STATUS UNKNOWN

VL JG power distribution connector 6-wire, 3-pack

OEM part number	3TA6JG20	A	S562 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9402-4TP31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	Printed values: 35, 40, 50, 120, 133 lb-in [4-15 Nm]; covers 11 lb-in	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00637	3TA6PG750	Siemens	lug-kit	STATUS UNKNOWN

VL PG 6-cable 750 kcmil Al lug, 3-pack

OEM part number	3TA6PG750	A	S571 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9875-4TJ31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame PG	A	same as above
Torque values	Binding 375 lb-in; 300 lb-in (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00615	3TAW1FG350	Siemens	lug-kit	STATUS UNKNOWN

VL FG Al/Cu lug, 3-pack

OEM part number	3TAW1FG350	A	S564 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9335-4TD31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Printed values 150, 200, 220, 275 lb-in [17-31 Nm] (per wire size)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00610	3TC1DG30	Siemens	lug-kit	STATUS UNKNOWN

VL DG Cu lug, 3-pack

OEM part number	3TC1DG30	A	S563 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9230-4TD61 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values 35, 50, 70, 120 lb-in [4-13.5 Nm] (per wire size)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00631	3TC4NG500	Siemens	lug-kit	STATUS UNKNOWN

VL NG 4-cable 500 Cu lug, 3-pack

OEM part number	3TC4NG500	A	S567 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9750-4TH61 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	Binding 375 lb-in; mounting 212 lb-in; covers 11 lb-in (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00618	3TCW1FG350	Siemens	lug-kit	STATUS UNKNOWN

VL FG Cu lug, 3-pack

OEM part number	3TCW1FG350	A	S564 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9335-4TD61 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Printed values 150, 200, 220, 275 lb-in [17-31 Nm] (per wire size)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00622	3TW1CG20	Siemens	lug-kit	STATUS UNKNOWN

VL CG wrap-around terminal, 3-pack

OEM part number	3TW1CG20	A	S566 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9120-4TC31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame CG	A	same as above
Torque values	Printed 4, 5.5, 8, 13.5 Nm	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00604	3TW1DG20	Siemens	lug-kit	STATUS UNKNOWN

VL DG wrap-around terminal, 3-pack

OEM part number	3TW1DG20	A	S563 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9220-4TC31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values 35, 50, 70, 120 lb-in [4-13.5 Nm] (per wire size)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00612	3TW1FG350	Siemens	lug-kit	STATUS UNKNOWN

VL FG wrap-around terminal, 3-pack

OEM part number	3TW1FG350	A	S564 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9335-4TC31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Printed values 150, 200, 220, 275 lb-in [17-31 Nm] (per wire size)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00620	3TW1JG600	Siemens	lug-kit	STATUS UNKNOWN

VL JG wrap-around terminal 600, 3-pack

OEM part number	3TW1JG600	A	S565 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9460-4TC31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	310 lb-in [35 Nm]; covers 11 lb-in [1.2 Nm]	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00608	4TA1DG30	Siemens	lug-kit	STATUS UNKNOWN

VL DG Al/Cu lug, 4-pack

OEM part number	4TA1DG30	A	S563 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9230-4TD41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values 35, 50, 70, 120 lb-in [4-13.5 Nm] (per wire size)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00626	4TA3NG750	Siemens	lug-kit	STATUS UNKNOWN

VL NG 3-cable 750 lug, 4-pack

OEM part number	4TA3NG750	A	S567 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9775-4TG41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	Binding 375 lb-in; mounting 212 lb-in; covers 11 lb-in (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00629	4TA4NG500	Siemens	lug-kit	STATUS UNKNOWN

VL NG 4-cable 500 lug, 4-pack

OEM part number	4TA4NG500	A	S567 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9750-4TH41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	Binding 375 lb-in; mounting 212 lb-in; covers 11 lb-in (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00616	4TAW1FG350	Siemens	lug-kit	STATUS UNKNOWN

VL FG Al/Cu lug, 4-pack

OEM part number	4TAW1FG350	A	S564 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9335-4TD41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Printed values 150, 200, 220, 275 lb-in [17-31 Nm] (per wire size)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00605	4TW1DG20	Siemens	lug-kit	STATUS UNKNOWN

VL DG wrap-around terminal, 4-pack

OEM part number	4TW1DG20	A	S563 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9220-4TC41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values 35, 50, 70, 120 lb-in [4-13.5 Nm] (per wire size)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00613	4TW1FG350	Siemens	lug-kit	STATUS UNKNOWN

VL FG wrap-around terminal, 4-pack

OEM part number	4TW1FG350	A	S564 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9335-4TC41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Printed values 150, 200, 220, 275 lb-in [17-31 Nm] (per wire size)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00621	4TW1JG600	Siemens	lug-kit	STATUS UNKNOWN

VL JG wrap-around terminal 600, 4-pack

OEM part number	4TW1JG600	A	S565 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9460-4TC41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	310 lb-in [35 Nm]; covers 11 lb-in [1.2 Nm]	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00601	TA12JG04	Siemens	lug-kit	STATUS UNKNOWN

VL JG power distribution connector 12-wire, single

OEM part number	TA12JG04	A	S562 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9404-4TP01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	Printed values: 35, 40, 50, 120, 133 lb-in [4-15 Nm]; covers 11 lb-in	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00606	TA1DG30	Siemens	lug-kit	STATUS UNKNOWN

VL DG Al/Cu lug (single)

OEM part number	TA1DG30	A	S563 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9230-4TD01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values 35, 50, 70, 120 lb-in [4-13.5 Nm] (per wire size)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00591	TA3DG02	Siemens	lug-kit	STATUS UNKNOWN

VL DG power 3-wire distribution connector, single

OEM part number	TA3DG02	A	S561 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9202-4TP01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values: 35 lb-in [4 Nm], 45 lb-in [5 Nm], 50 lb-in [5.6 Nm], 60 lb-in, Al 140 lb-in [15.5 Nm] (per-size mapping in table)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00595	TA3FG20	Siemens	lug-kit	STATUS UNKNOWN

VL FG power 3-wire distribution connector, single

OEM part number	TA3FG20	A	S561 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9302-4TP01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Printed values: 35 lb-in [4 Nm], 45 lb-in [5 Nm], 50 lb-in [5.6 Nm], 60 lb-in, Al 140 lb-in [15.5 Nm] (per-size mapping in table)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00593	TA6DG04	Siemens	lug-kit	STATUS UNKNOWN

VL DG power 6-wire distribution connector, single

OEM part number	TA6DG04	A	S561 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9204-4TP01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values: 35 lb-in [4 Nm], 45 lb-in [5 Nm], 50 lb-in [5.6 Nm], 60 lb-in, Al 140 lb-in [15.5 Nm] (per-size mapping in table)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00597	TA6FG04	Siemens	lug-kit	STATUS UNKNOWN

VL FG power 6-wire distribution connector, single

OEM part number	TA6FG04	**A**	S561 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9304-4TP01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame FG	**A**	same as above
Torque values	Printed values: 35 lb-in [4 Nm], 45 lb-in [5 Nm], 50 lb-in [5.6 Nm], 60 lb-in, Al 140 lb-in [15.5 Nm] (per-size mapping in table)	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00599	TA6JG20	Siemens	lug-kit	STATUS UNKNOWN

VL JG power distribution connector 6-wire, single

OEM part number	TA6JG20	**A**	S562 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9402-4TP01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame JG	**A**	same as above
Torque values	Printed values: 35, 40, 50, 120, 133 lb-in [4-15 Nm]; covers 11 lb-in	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00636	TA6PG750	Siemens	lug-kit	STATUS UNKNOWN

VL PG 6-cable 750 kcmil Al lug (single)

OEM part number	TA6PG750	**A**	S571 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9875-4TJ01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame PG	**A**	same as above
Torque values	Binding 375 lb-in; 300 lb-in (as printed)	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00614	TAW1FG350	Siemens	lug-kit	STATUS UNKNOWN

VL FG Al/Cu lug 350 (single)

OEM part number	TAW1FG350	**A**	S564 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9335-4TD01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame FG	**A**	same as above
Torque values	Printed values 150, 200, 220, 275 lb-in [17-31 Nm] (per wire size)	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00609	TC1DG30	Siemens	lug-kit	STATUS UNKNOWN

VL DG Cu lug (single)

OEM part number	TC1DG30	**A**	S563 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9230-4TD11 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame DG	**A**	same as above
Torque values	Printed values 35, 50, 70, 120 lb-in [4-13.5 Nm] (per wire size)	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00617	TCW1FG350	Siemens	lug-kit	STATUS UNKNOWN

VL FG Cu lug (single)

OEM part number	TCW1FG350	**A**	S564 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9335-4TD11 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame FG	**A**	same as above
Torque values	Printed values 150, 200, 220, 275 lb-in [17-31 Nm] (per wire size)	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00603	TW1DG20	Siemens	lug-kit	STATUS UNKNOWN

VL DG box/wrap-around terminal 20 (single)

OEM part number	TW1DG20	**A**	S563 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9220-4TC01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame DG	**A**	same as above
Torque values	Printed values 35, 50, 70, 120 lb-in [4-13.5 Nm] (per wire size)	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00611	TW1FG350	Siemens	lug-kit	STATUS UNKNOWN

VL FG wrap-around terminal 350 (single)

OEM part number	TW1FG350	**A**	S564 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9335-4TC01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame FG	**A**	same as above
Torque values	Printed values 150, 200, 220, 275 lb-in [17-31 Nm] (per wire size)	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00619	TW1JG600	Siemens	lug-kit	STATUS UNKNOWN

VL JG wrap-around terminal 600, single

OEM part number	TW1JG600	**A**	S565 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9460-4TC01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame JG	**A**	same as above
Torque values	310 lb-in [35 Nm]; covers 11 lb-in [1.2 Nm]	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00297	**TA4P750**	Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)	P(X)D6, HP(X)D6, CPD6, SPD6-B, SHPD6-B 1200-1600 A **A**	current

EDH-SIE-00297	TA4P750	Siemens	lug	CURRENT

Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)

OEM part number	TA4P750	A	S203, S204, S569, S580 s6 p. 7-155; oem_spec
Alternate / superseded numbers	3VL9875-4TH31	A	S569 equivalent; pp.1-5; oem_spec
Description	Optional aluminum lug, built to order (6-8 weeks)	A	S203, S204 s6 p. 7-155; oem_spec
	(1-4) 600-750 kcmil Cu-Al	A	S580 p.1; oem_spec
Application	accessory	A	S203, S204 s6 p. 7-155; oem_spec
Breaker compatibility	P(X)D6, HP(X)D6, CPD6, SPD6-B, SHPD6-B 1200-1600 A	A	same as above
	Sentron VL frame PG	A	S569 pp.1-5; oem_spec
	PD and PM frame breakers and switches	A	S580 p.1; oem_spec
Kit contents	1 lug; wire range 1-4 x 600-750 kcmil Cu/Al	A	S203, S204 s6 p. 7-155; oem_spec
Material	{'value': 'Aluminum', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Torque values	Printed values 53, 120, 210, 300, 375, 480, 600, 780 lb-in; covers 11 lb-in (per-fastener mapping in figures)	A	S569 pp.1-5; oem_spec
	Set screw 480 in-lb; mounting bolts 300 in-lb	A	S580 p.1; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S203, S204 s6 p. 7-155; oem_spec
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG), Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00633	**MBPG1600**	VL PG breaker mounting base 1600	Sentron VL frame PG **A**	unknown
EDH-SIE-00634	**MBPG1601**	VL PG breaker mounting base 1601	Sentron VL frame PG **A**	unknown
EDH-SIE-00641	**PCBDFC3**	VL DG plug-in base, front connection, 3-pole	Sentron VL frame DG **A**	unknown
EDH-SIE-00642	**PCBDFC4**	VL DG plug-in base, front connection, 4-pole	Sentron VL frame DG **A**	unknown
EDH-SIE-00639	**PCBDRC3**	VL DG plug-in base, rear connection, 3-pole	Sentron VL frame DG **A**	unknown
EDH-SIE-00640	**PCBDRC4**	VL DG plug-in base, rear connection, 4-pole	Sentron VL frame DG **A**	unknown
EDH-SIE-00645	**PCBFFC3**	VL FG plug-in base, front connection, 3-pole	Sentron VL frame FG **A**	unknown
EDH-SIE-00646	**PCBFFC4**	VL FG plug-in base, front connection, 4-pole	Sentron VL frame FG **A**	unknown
EDH-SIE-00643	**PCBFRC3**	VL FG plug-in base, rear connection, 3-pole	Sentron VL frame FG **A**	unknown
EDH-SIE-00644	**PCBFRC4**	VL FG plug-in base, rear connection, 4-pole	Sentron VL frame FG **A**	unknown
EDH-SIE-00650	**PCBJRC3**	VL JG plug-in base, rear connection, 3-pole	Sentron VL frame JG **A**	unknown
EDH-SIE-00651	**PCBJRC4**	VL JG plug-in base, rear connection, 4-pole	Sentron VL frame JG **A**	unknown
EDH-SIE-00652	**PCBLFC4**	VL LG plug-in base, front connection, 4-pole	Sentron VL frame LG **A**	unknown
EDH-SIE-00654	**PCBMRC3**	VL MG plug-in base, rear connection, 3-pole	Sentron VL frame MG **A**	unknown
EDH-SIE-00658	**PCBNRC3**	VL NG plug-in base, rear connection, 3-pole	Sentron VL frame NG **A**	unknown
EDH-SIE-00647	**PCXD3**	VL DG plug-in contact (breaker side) kit, 3-pole	Sentron VL frame DG **A**	unknown
EDH-SIE-00648	**PCXD4**	VL DG plug-in contact kit, 4-pole	Sentron VL frame DG **A**	unknown
EDH-SIE-00649	**PCXFT**	VL FG plug-in accessory (PCXFT)	Sentron VL frame FG **A**	unknown
EDH-SIE-00653	**PCXLT**	VL JG/LG plug-in accessory (PCXLT)	Sentron VL frame JG **A**	unknown
EDH-SIE-00655	**PCXM3**	VL MG plug-in contact kit, 3-pole	Sentron VL frame MG **A**	unknown
EDH-SIE-00656	**PCXMH**	VL MG plug-in accessory (PCXMH)	Sentron VL frame MG **A**	unknown
EDH-SIE-00657	**PCXMT**	VL MG plug-in accessory (PCXMT)	Sentron VL frame MG **A**	unknown
EDH-SIE-00659	**PCXN3**	VL NG plug-in contact kit, 3-pole	Sentron VL frame NG **A**	unknown
EDH-SIE-00660	**PCXPT**	VL NG/PG plug-in accessory (PCXPT)	Sentron VL frame NG **A**	unknown

EDH-SIE-00633	MBPG1600	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL PG breaker mounting base 1600

OEM part number	MBPG1600	A	S569 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9800-4TU31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame PG	A	same as above
Torque values	Printed values 53, 120, 210, 300, 375, 480, 600, 780 lb-in; covers 11 lb-in (per-fastener mapping in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00634	MBPG1601	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL PG breaker mounting base 1601

OEM part number	MBPG1601	A	S569 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9800-4TV31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame PG	A	same as above
Torque values	Printed values 53, 120, 210, 300, 375, 480, 600, 780 lb-in; covers 11 lb-in (per-fastener mapping in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00641	PCBDFC3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL DG plug-in base, front connection, 3-pole

OEM part number	PCBDFC3	A	S573 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9200-4PC31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values 133 lb-in [15 Nm], 62 lb-in [7 Nm], 18 lb-in [2 Nm], 4 lb-in [0.5 Nm]	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00642	PCBDFC4	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL DG plug-in base, front connection, 4-pole

OEM part number	PCBDFC4	A	S573 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9200-4PC41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values 133 lb-in [15 Nm], 62 lb-in [7 Nm], 18 lb-in [2 Nm], 4 lb-in [0.5 Nm]	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00639	PCBDRC3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL DG plug-in base, rear connection, 3-pole

OEM part number	PCBDRC3	A	S573 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9200-4PA31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values 133 lb-in [15 Nm], 62 lb-in [7 Nm], 18 lb-in [2 Nm], 4 lb-in [0.5 Nm]	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00640	PCBDRC4	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL DG plug-in base, rear connection, 4-pole

OEM part number	PCBDRC4	**A**	S573 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9200-4PA41 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame DG	**A**	same as above
Torque values	Printed values 133 lb-in [15 Nm], 62 lb-in [7 Nm], 18 lb-in [2 Nm], 4 lb-in [0.5 Nm]	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00645	PCBFFC3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL FG plug-in base, front connection, 3-pole

OEM part number	PCBFFC3	**A**	S573 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9300-4PC31 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame FG	**A**	same as above
Torque values	Printed values 133 lb-in [15 Nm], 62 lb-in [7 Nm], 18 lb-in [2 Nm], 4 lb-in [0.5 Nm]	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00646	PCBFFC4	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL FG plug-in base, front connection, 4-pole

OEM part number	PCBFFC4	**A**	S573 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9300-4PC41 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame FG	**A**	same as above
Torque values	Printed values 133 lb-in [15 Nm], 62 lb-in [7 Nm], 18 lb-in [2 Nm], 4 lb-in [0.5 Nm]	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00643	PCBFRC3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL FG plug-in base, rear connection, 3-pole

OEM part number	PCBFRC3	**A**	S573 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9300-4PA31 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame FG	**A**	same as above
Torque values	Printed values 133 lb-in [15 Nm], 62 lb-in [7 Nm], 18 lb-in [2 Nm], 4 lb-in [0.5 Nm]	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00644	PCBFRC4	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL FG plug-in base, rear connection, 4-pole

OEM part number	PCBFRC4	**A**	S573 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9300-4PA41 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame FG	**A**	same as above
Torque values	Printed values 133 lb-in [15 Nm], 62 lb-in [7 Nm], 18 lb-in [2 Nm], 4 lb-in [0.5 Nm]	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00650	PCBJRC3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL JG plug-in base, rear connection, 3-pole

OEM part number	PCBJRC3	A	S574 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9400-4PA31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	Printed values 133 lb-in [15 Nm], 212 lb-in [20 Nm]; 2 Nm	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00651	PCBJRC4	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL JG plug-in base, rear connection, 4-pole

OEM part number	PCBJRC4	A	S574 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9400-4PA41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	Printed values 133 lb-in [15 Nm], 212 lb-in [20 Nm]; 2 Nm	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00652	PCBLFC4	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL LG plug-in base, front connection, 4-pole

OEM part number	PCBLFC4	A	S574 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9460-4PC41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame LG	A	same as above
Torque values	Printed values 133 lb-in [15 Nm], 212 lb-in [20 Nm]; 2 Nm	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00654	PCBMRC3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL MG plug-in base, rear connection, 3-pole

OEM part number	PCBMRC3	A	S575 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9600-4PA31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame MG	A	same as above
Torque values	Printed values 144 lb-in [16 Nm], 72 lb-in [8 Nm], 27 Nm, 11 lb-in; 8x M4x10 mm screws	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00658	PCBNRC3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL NG plug-in base, rear connection, 3-pole

OEM part number	PCBNRC3	A	S576 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9700-4PA31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	Printed values 144 lb-in [16 Nm], 240 lb-in [27 Nm], 72 lb-in [8 Nm], 11 lb-in	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00647	PCXD3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL DG plug-in contact (breaker side) kit, 3-pole

OEM part number	PCXD3	A	S573 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9200-4PS31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values 133 lb-in [15 Nm], 62 lb-in [7 Nm], 18 lb-in [2 Nm], 4 lb-in [0.5 Nm]	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00648	PCXD4	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL DG plug-in contact kit, 4-pole

OEM part number	PCXD4	A	S573 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9200-4PS41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Printed values 133 lb-in [15 Nm], 62 lb-in [7 Nm], 18 lb-in [2 Nm], 4 lb-in [0.5 Nm]	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00649	PCXFT	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL FG plug-in accessory (PCXFT)

OEM part number	PCXFT	A	S573 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9300-4PF01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Printed values 133 lb-in [15 Nm], 62 lb-in [7 Nm], 18 lb-in [2 Nm], 4 lb-in [0.5 Nm]	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00653	PCXLT	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL JG/LG plug-in accessory (PCXLT)

OEM part number	PCXLT	A	S574 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9400-4PF01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	Printed values 133 lb-in [15 Nm], 212 lb-in [20 Nm]; 2 Nm	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00655	PCXM3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL MG plug-in contact kit, 3-pole

OEM part number	PCXM3	A	S575 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9600-4PS31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame MG	A	same as above
Torque values	Printed values 144 lb-in [16 Nm], 72 lb-in [8 Nm], 27 Nm, 11 lb-in; 8x M4x10 mm screws	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00656	PCXMH	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL MG plug-in accessory (PCXMH)

OEM part number	PCXMH	**A**	S575 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9600-4WH01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame MG	**A**	same as above
Torque values	Printed values 144 lb-in [16 Nm], 72 lb-in [8 Nm], 27 Nm, 11 lb-in; 8x M4x10 mm screws	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00657	PCXMT	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL MG plug-in accessory (PCXMT)

OEM part number	PCXMT	**A**	S575 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9600-4PF01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame MG	**A**	same as above
Torque values	Printed values 144 lb-in [16 Nm], 72 lb-in [8 Nm], 27 Nm, 11 lb-in; 8x M4x10 mm screws	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00659	PCXN3	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL NG plug-in contact kit, 3-pole

OEM part number	PCXN3	**A**	S576 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9700-4PS31 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame NG	**A**	same as above
Torque values	Printed values 144 lb-in [16 Nm], 240 lb-in [27 Nm], 72 lb-in [8 Nm], 11 lb-in	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00660	PCXPT	Siemens	breaker-mounting-kit	STATUS UNKNOWN

VL NG/PG plug-in accessory (PCXPT)

OEM part number	PCXPT	**A**	S576 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9800-4PF01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame NG	**A**	same as above
Torque values	Printed values 144 lb-in [16 Nm], 240 lb-in [27 Nm], 72 lb-in [8 Nm], 11 lb-in	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00584	**FBCD3**	VL DG front busbar connection set, 3-pole	Sentron VL frame DG **A**	unknown
EDH-SIE-00585	**FBCD4**	VL DG front busbar connection set, 4-pole	Sentron VL frame DG **A**	unknown
EDH-SIE-00586	**FBCF3**	VL FG front busbar connection set, 3-pole	Sentron VL frame FG **A**	unknown
EDH-SIE-00587	**FBCF4**	VL FG front busbar connection set, 4-pole	Sentron VL frame FG **A**	unknown
EDH-SIE-00588	**FBCJ3**	VL JG front busbar connection set, 3-pole	Sentron VL frame JG **A**	unknown
EDH-SIE-00589	**FBCJ4**	VL JG front busbar connection set, 4-pole	Sentron VL frame JG **A**	unknown
EDH-SIE-00590	**FBCL3**	VL LG front busbar connection set, 3-pole	Sentron VL frame LG **A**	unknown
EDH-SIE-00635	**LMAP1600**	VL PG lug mounting assembly 1600	Sentron VL frame PG **A**	unknown

EDH-SIE-00584	FBCD3	Siemens	connector-strap	STATUS UNKNOWN

VL DG front busbar connection set, 3-pole

OEM part number	FBCD3	A	S560 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9200-4EC31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Poles	3-pole	A	same as above
Torque values	Printed values 40 lb-in [4.5 Nm], 89 lb-in [10 Nm], 133 lb-in [15 Nm], 222 lb-in [25 Nm]; covers 11 lb-in (per-fastener mapping in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00585	FBCD4	Siemens	connector-strap	STATUS UNKNOWN

VL DG front busbar connection set, 4-pole

OEM part number	FBCD4	A	S560 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9200-4EC41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Poles	4-pole	A	same as above
Torque values	Printed values 40 lb-in [4.5 Nm], 89 lb-in [10 Nm], 133 lb-in [15 Nm], 222 lb-in [25 Nm]; covers 11 lb-in (per-fastener mapping in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00586	FBCF3	Siemens	connector-strap	STATUS UNKNOWN

VL FG front busbar connection set, 3-pole

OEM part number	FBCF3	A	S560 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9300-4EC31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Poles	3-pole	A	same as above
Torque values	Printed values 40 lb-in [4.5 Nm], 89 lb-in [10 Nm], 133 lb-in [15 Nm], 222 lb-in [25 Nm]; covers 11 lb-in (per-fastener mapping in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00587	FBCF4	Siemens	connector-strap	STATUS UNKNOWN

VL FG front busbar connection set, 4-pole

OEM part number	FBCF4	A	S560 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9300-4EC41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Poles	4-pole	A	same as above
Torque values	Printed values 40 lb-in [4.5 Nm], 89 lb-in [10 Nm], 133 lb-in [15 Nm], 222 lb-in [25 Nm]; covers 11 lb-in (per-fastener mapping in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00588	FBCJ3	Siemens	connector-strap	STATUS UNKNOWN

VL JG front busbar connection set, 3-pole

OEM part number	FBCJ3	A	S560 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9400-4EC31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Poles	3-pole	A	same as above
Torque values	Printed values 40 lb-in [4.5 Nm], 89 lb-in [10 Nm], 133 lb-in [15 Nm], 222 lb-in [25 Nm]; covers 11 lb-in (per-fastener mapping in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00589	FBCJ4	Siemens	connector-strap	STATUS UNKNOWN

VL JG front busbar connection set, 4-pole

OEM part number	FBCJ4	A	S560 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9400-4EC41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Poles	4-pole	A	same as above
Torque values	Printed values 40 lb-in [4.5 Nm], 89 lb-in [10 Nm], 133 lb-in [15 Nm], 222 lb-in [25 Nm]; covers 11 lb-in (per-fastener mapping in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00590	FBCL3	Siemens	connector-strap	STATUS UNKNOWN

VL LG front busbar connection set, 3-pole

OEM part number	FBCL3	A	S560 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9460-4EC31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame LG	A	same as above
Poles	3-pole	A	same as above
Torque values	Printed values 40 lb-in [4.5 Nm], 89 lb-in [10 Nm], 133 lb-in [15 Nm], 222 lb-in [25 Nm]; covers 11 lb-in (per-fastener mapping in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00635	LMAP1600	Siemens	connector-strap	STATUS UNKNOWN

VL PG lug mounting assembly 1600

OEM part number	LMAP1600	A	S570 pp.1-7; oem_spec
Alternate / superseded numbers	3VL9800-4EB01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame PG	A	same as above
Torque values	212 lb-in, 247 lb-in; covers 11 lb-in	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00537	**3VL9300-8CE01**	VL CG/DG/FG interphase barrier (3-pole set)	Sentron VL frame CG, DG, FG A	unknown
EDH-SIE-00539	**3VL9600-8CE01**	VL JG/LG/MG interphase barrier	Sentron VL frame JG, LG, MG A	unknown
EDH-SIE-00541	**3VL9800-8CE01**	VL NG/PG interphase barrier	Sentron VL frame NG, PG A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00536	**IPBF4**	VL CG/DG/FG interphase barrier, 4-pole	Sentron VL frame CG, DG, FG **A**	unknown
EDH-SIE-00538	**IPBM4**	VL JG/LG/MG interphase barrier, 4-pole	Sentron VL frame JG, LG, MG **A**	unknown
EDH-SIE-00540	**IPBP4**	VL NG/PG interphase barrier, 4-pole	Sentron VL frame NG, PG **A**	unknown

EDH-SIE-00537 — 3VL9300-8CE01 — Siemens — barrier — STATUS UNKNOWN

VL CG/DG/FG interphase barrier (3-pole set)

OEM part number	3VL9300-8CE01	**A**	S551 p.1; oem_spec
Description	US catalog number not legible in text layer	**A**	same as above
Breaker compatibility	Sentron VL frame CG, DG, FG	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00539 — 3VL9600-8CE01 — Siemens — barrier — STATUS UNKNOWN

VL JG/LG/MG interphase barrier

OEM part number	3VL9600-8CE01	**A**	S552 p.1; oem_spec
Breaker compatibility	Sentron VL frame JG, LG, MG	**A**	same as above
Torque values	18 lb-in [2 Nm]	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00541 — 3VL9800-8CE01 — Siemens — barrier — STATUS UNKNOWN

VL NG/PG interphase barrier

OEM part number	3VL9800-8CE01	**A**	S553 p.1; oem_spec
Breaker compatibility	Sentron VL frame NG, PG	**A**	same as above
Torque values	11 lb-in [1.2 Nm]	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00536 — IPBF4 — Siemens — barrier — STATUS UNKNOWN

VL CG/DG/FG interphase barrier, 4-pole

OEM part number	IPBF4	**A**	S551 p.1; oem_spec
Alternate / superseded numbers	3VL9300-8CE41 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame CG, DG, FG	**A**	same as above
Poles	4-pole	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00538 — IPBM4 — Siemens — barrier — STATUS UNKNOWN

VL JG/LG/MG interphase barrier, 4-pole

OEM part number	IPBM4	**A**	S552 p.1; oem_spec
Alternate / superseded numbers	3VL9600-8CE41 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame JG, LG, MG	**A**	same as above
Poles	4-pole	**A**	same as above
Torque values	18 lb-in [2 Nm]	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00540	IPBP4	Siemens	barrier	STATUS UNKNOWN

VL NG/PG interphase barrier, 4-pole

OEM part number	IPBP4	**A**	S553 p.1; oem_spec
Alternate / superseded numbers	3VL9800-8CE41 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame NG, PG	**A**	same as above
Poles	4-pole	**A**	same as above
Torque values	11 lb-in [1.2 Nm]	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00638	**MSKM4**	VL MG/NG/PG breaker mounting screw kit, 4-pole	Sentron VL frame MG, NG, PG **A**	unknown

EDH-SIE-00638	MSKM4	Siemens	fastener	STATUS UNKNOWN

VL MG/NG/PG breaker mounting screw kit, 4-pole

OEM part number	MSKM4	**A**	S572 pp.1-2; oem_spec
Alternate / superseded numbers	3VL9600-8SB41 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame MG, NG, PG	**A**	same as above
Torque values	35 lb-in [4 Nm]; 53 lb-in [6 Nm]; 11 lb-in	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Terminal Shield

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00542	**TSLF3**	VL CG/DG/FG extended terminal cover (TSL), 3-pole	Sentron VL frame CG, DG, FG **A**	unknown
EDH-SIE-00543	**TSLF4**	VL CG/DG/FG extended terminal cover (TSL), 4-pole	Sentron VL frame CG, DG, FG **A**	unknown
EDH-SIE-00544	**TSLL3**	VL JG/LG terminal shield long (TSL), 3-pole	Sentron VL frame JG, LG **A**	unknown
EDH-SIE-00545	**TSLL4**	VL JG/LG terminal shield long (TSL), 4-pole	Sentron VL frame JG, LG **A**	unknown
EDH-SIE-00548	**TSLM3**	VL MG terminal shield long (TSL), 3-pole	Sentron VL frame MG **A**	unknown
EDH-SIE-00552	**TSLM3M**	VL MG terminal shield long, M variant, 3-pole	Sentron VL frame MG **A**	unknown
EDH-SIE-00549	**TSLM4**	VL MG terminal shield long (TSL), 4-pole	Sentron VL frame MG **A**	unknown
EDH-SIE-00553	**TSLM4M**	VL MG terminal shield long, M variant, 4-pole	Sentron VL frame MG **A**	unknown
EDH-SIE-00546	**TSSL3**	VL JG/LG terminal shield short (TSS), 3-pole	Sentron VL frame JG, LG **A**	unknown
EDH-SIE-00547	**TSSL4**	VL JG/LG terminal shield short (TSS), 4-pole	Sentron VL frame JG, LG **A**	unknown
EDH-SIE-00550	**TSSM3**	VL MG terminal shield short (TSS), 3-pole	Sentron VL frame MG **A**	unknown
EDH-SIE-00551	**TSSM4**	VL MG terminal shield short (TSS), 4-pole	Sentron VL frame MG **A**	unknown

EDH-SIE-00542	TSLF3	Siemens	terminal-shield	STATUS UNKNOWN

VL CG/DG/FG extended terminal cover (TSL), 3-pole

OEM part number	TSLF3	**A**	S554 p.1; oem_spec
Alternate / superseded numbers	3VL9300-8CA31 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame CG, DG, FG	**A**	same as above
Poles	3-pole	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00543	TSLF4	Siemens	terminal-shield	STATUS UNKNOWN

VL CG/DG/FG extended terminal cover (TSL), 4-pole

OEM part number	TSLF4	A	S554 p.1; oem_spec
Alternate / superseded numbers	3VL9300-8CA41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame CG, DG, FG	A	same as above
Poles	4-pole	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00544	TSLL3	Siemens	terminal-shield	STATUS UNKNOWN

VL JG/LG terminal shield long (TSL), 3-pole

OEM part number	TSLL3	A	S555 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9400-8CA31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG, LG	A	same as above
Poles	3-pole	A	same as above
Torque values	Cover screws 11 lb-in [1.2 Nm]; 18 lb-in [2 Nm] (as printed in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00545	TSLL4	Siemens	terminal-shield	STATUS UNKNOWN

VL JG/LG terminal shield long (TSL), 4-pole

OEM part number	TSLL4	A	S555 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9400-8CA41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG, LG	A	same as above
Poles	4-pole	A	same as above
Torque values	Cover screws 11 lb-in [1.2 Nm]; 18 lb-in [2 Nm] (as printed in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00548	TSLM3	Siemens	terminal-shield	STATUS UNKNOWN

VL MG terminal shield long (TSL), 3-pole

OEM part number	TSLM3	A	S555 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9600-8CA31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame MG	A	same as above
Poles	3-pole	A	same as above
Torque values	Cover screws 11 lb-in [1.2 Nm]; 18 lb-in [2 Nm] (as printed in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00552	TSLM3M	Siemens	terminal-shield	STATUS UNKNOWN

VL MG terminal shield long, M variant, 3-pole

OEM part number	TSLM3M	A	S555 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9600-8CG31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame MG	A	same as above
Poles	3-pole	A	same as above
Torque values	Cover screws 11 lb-in [1.2 Nm]; 18 lb-in [2 Nm] (as printed in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00549	TSLM4	Siemens	terminal-shield	STATUS UNKNOWN

VL MG terminal shield long (TSL), 4-pole

OEM part number	TSLM4	A	S555 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9600-8CA41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame MG	A	same as above
Poles	4-pole	A	same as above
Torque values	Cover screws 11 lb-in [1.2 Nm]; 18 lb-in [2 Nm] (as printed in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00553	TSLM4M	Siemens	terminal-shield	STATUS UNKNOWN

VL MG terminal shield long, M variant, 4-pole

OEM part number	TSLM4M	A	S555 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9600-8CG41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame MG	A	same as above
Poles	4-pole	A	same as above
Torque values	Cover screws 11 lb-in [1.2 Nm]; 18 lb-in [2 Nm] (as printed in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00546	TSSL3	Siemens	terminal-shield	STATUS UNKNOWN

VL JG/LG terminal shield short (TSS), 3-pole

OEM part number	TSSL3	A	S555 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9400-8CB31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG, LG	A	same as above
Poles	3-pole	A	same as above
Torque values	Cover screws 11 lb-in [1.2 Nm]; 18 lb-in [2 Nm] (as printed in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00547	TSSL4	Siemens	terminal-shield	STATUS UNKNOWN

VL JG/LG terminal shield short (TSS), 4-pole

OEM part number	TSSL4	A	S555 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9400-8CB41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG, LG	A	same as above
Poles	4-pole	A	same as above
Torque values	Cover screws 11 lb-in [1.2 Nm]; 18 lb-in [2 Nm] (as printed in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00550	TSSM3	Siemens	terminal-shield	STATUS UNKNOWN

VL MG terminal shield short (TSS), 3-pole

OEM part number	TSSM3	A	S555 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9600-8CB31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame MG	A	same as above
Poles	3-pole	A	same as above
Torque values	Cover screws 11 lb-in [1.2 Nm]; 18 lb-in [2 Nm] (as printed in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00551	TSSM4	Siemens	terminal-shield	STATUS UNKNOWN

VL MG terminal shield short (TSS), 4-pole

OEM part number	TSSM4	A	S555 pp.1-6; oem_spec
Alternate / superseded numbers	3VL9600-8CB41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame MG	A	same as above
Poles	4-pole	A	same as above
Torque values	Cover screws 11 lb-in [1.2 Nm]; 18 lb-in [2 Nm] (as printed in figures)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

Rear Stud

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00556	**RTLDLF**	VL DG rear terminal long, flat	Sentron VL frame DG **A**	unknown
EDH-SIE-00557	**RTLDLR**	VL DG rear terminal long, round	Sentron VL frame DG **A**	unknown
EDH-SIE-00554	**RTLDSF**	VL DG rear terminal short, flat	Sentron VL frame DG **A**	unknown
EDH-SIE-00555	**RTLDSR**	VL DG rear terminal short, round	Sentron VL frame DG **A**	unknown
EDH-SIE-00564	**RTLFLF**	VL FG rear terminal long, flat	Sentron VL frame FG **A**	unknown
EDH-SIE-00565	**RTLFLR**	VL FG rear terminal long, round	Sentron VL frame FG **A**	unknown
EDH-SIE-00562	**RTLFSF**	VL FG rear terminal short, flat	Sentron VL frame FG **A**	unknown
EDH-SIE-00563	**RTLFSR**	VL FG rear terminal short, round	Sentron VL frame FG **A**	unknown
EDH-SIE-00571	**RTLJLF**	VL JG rear terminal long, flat	Sentron VL frame JG **A**	unknown
EDH-SIE-00572	**RTLJSF**	VL JG rear terminal short, flat	Sentron VL frame JG **A**	unknown
EDH-SIE-00570	**RTLJSR**	VL JG rear terminal short, round	Sentron VL frame JG **A**	unknown
EDH-SIE-00576	**RTLLSF**	VL LG rear terminal short, flat	Sentron VL frame LG **A**	unknown
EDH-SIE-00581	**RTLNSF**	VL NG rear terminal short, flat	Sentron VL frame NG **A**	unknown
EDH-SIE-00560	**SRTDF3**	VL DG rear stud flat, 3-pole set	Sentron VL frame DG **A**	unknown
EDH-SIE-00561	**SRTDF4**	VL DG rear stud flat, 4-pole set	Sentron VL frame DG **A**	unknown
EDH-SIE-00558	**SRTDR3**	VL DG rear stud round, 3-pole set	Sentron VL frame DG **A**	unknown
EDH-SIE-00559	**SRTDR4**	VL DG rear stud round, 4-pole set	Sentron VL frame DG **A**	unknown
EDH-SIE-00568	**SRTFF3**	VL FG rear stud flat, 3-pole set	Sentron VL frame FG **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00569	**SRTFF4**	VL FG rear stud flat, 4-pole set	Sentron VL frame FG **A**	unknown
EDH-SIE-00566	**SRTFR3**	VL FG rear stud round, 3-pole set	Sentron VL frame FG **A**	unknown
EDH-SIE-00567	**SRTFR4**	VL FG rear stud round, 4-pole set	Sentron VL frame FG **A**	unknown
EDH-SIE-00573	**SRTJF4**	VL JG rear stud flat, 4-pole set	Sentron VL frame JG **A**	unknown
EDH-SIE-00574	**SRTJR3**	VL JG rear stud round, 3-pole set	Sentron VL frame JG **A**	unknown
EDH-SIE-00575	**SRTJR4**	VL JG rear stud round, 4-pole set	Sentron VL frame JG **A**	unknown
EDH-SIE-00577	**SRTLF3**	VL LG rear stud flat, 3-pole set	Sentron VL frame LG **A**	unknown
EDH-SIE-00578	**SRTLF4**	VL LG rear stud flat, 4-pole set	Sentron VL frame LG **A**	unknown
EDH-SIE-00579	**SRTMF3**	VL MG rear stud flat, 3-pole set	Sentron VL frame MG **A**	unknown
EDH-SIE-00580	**SRTMF4**	VL MG rear stud flat, 4-pole set	Sentron VL frame MG **A**	unknown
EDH-SIE-00582	**SRTNF3**	VL NG rear stud flat, 3-pole set	Sentron VL frame NG **A**	unknown
EDH-SIE-00583	**SRTNF4**	VL NG rear stud flat, 4-pole set	Sentron VL frame NG **A**	unknown

EDH-SIE-00556	**RTLDLF**	Siemens	rear-stud	STATUS UNKNOWN

VL DG rear terminal long, flat

OEM part number	RTLDLF	**A**	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9200-4RL01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame DG	**A**	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00557	**RTLDLR**	Siemens	rear-stud	STATUS UNKNOWN

VL DG rear terminal long, round

OEM part number	RTLDLR	**A**	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9200-4RB01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame DG	**A**	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00554	**RTLDSF**	Siemens	rear-stud	STATUS UNKNOWN

VL DG rear terminal short, flat

OEM part number	RTLDSF	**A**	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9200-4RK01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame DG	**A**	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00555	**RTLDSR**	Siemens	rear-stud	STATUS UNKNOWN

VL DG rear terminal short, round

OEM part number	RTLDSR	**A**	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9200-4RA01 [equivalent]	**A**	same as above
Breaker compatibility	Sentron VL frame DG	**A**	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	**A**	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00564	RTLFLF	Siemens	rear-stud	STATUS UNKNOWN

VL FG rear terminal long, flat

OEM part number	RTLFLF	A	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9300-4RL01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00565	RTLFLR	Siemens	rear-stud	STATUS UNKNOWN

VL FG rear terminal long, round

OEM part number	RTLFLR	A	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9300-4RB01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00562	RTLFSF	Siemens	rear-stud	STATUS UNKNOWN

VL FG rear terminal short, flat

OEM part number	RTLFSF	A	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9300-4RK01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00563	RTLFSR	Siemens	rear-stud	STATUS UNKNOWN

VL FG rear terminal short, round

OEM part number	RTLFSR	A	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9300-4RA01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00571	RTLJLF	Siemens	rear-stud	STATUS UNKNOWN

VL JG rear terminal long, flat

OEM part number	RTLJLF	A	S557 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9400-4RL01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	133 lb-in [15 Nm]; 266 lb-in [30 Nm]; cover screws 11 lb-in [1.2 Nm] (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00572	RTLJSF	Siemens	rear-stud	STATUS UNKNOWN

VL JG rear terminal short, flat

OEM part number	RTLJSF	A	S557 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9400-4RK01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	133 lb-in [15 Nm]; 266 lb-in [30 Nm]; cover screws 11 lb-in [1.2 Nm] (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00570	RTLJSR	Siemens	rear-stud	STATUS UNKNOWN

VL JG rear terminal short, round

OEM part number	RTLJSR	A	S557 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9400-4RA01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	133 lb-in [15 Nm]; 266 lb-in [30 Nm]; cover screws 11 lb-in [1.2 Nm] (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00576	RTLLSF	Siemens	rear-stud	STATUS UNKNOWN

VL LG rear terminal short, flat

OEM part number	RTLLSF	A	S557 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9460-4RG01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame LG	A	same as above
Torque values	133 lb-in [15 Nm]; 266 lb-in [30 Nm]; cover screws 11 lb-in [1.2 Nm] (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00581	RTLNSF	Siemens	rear-stud	STATUS UNKNOWN

VL NG rear terminal short, flat

OEM part number	RTLNSF	A	S559 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9700-4RG01 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	266 lb-in [30 Nm]; 11 lb-in [1.2 Nm]	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00560	SRTDF3	Siemens	rear-stud	STATUS UNKNOWN

VL DG rear stud flat, 3-pole set

OEM part number	SRTDF3	A	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9200-4RM31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00561	SRTDF4	Siemens	rear-stud	STATUS UNKNOWN

VL DG rear stud flat, 4-pole set

OEM part number	SRTDF4	A	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9200-4RN41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00558	SRTDR3	Siemens	rear-stud	STATUS UNKNOWN

VL DG rear stud round, 3-pole set

OEM part number	SRTDR3	A	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9200-4RC31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00559	SRTDR4	Siemens	rear-stud	STATUS UNKNOWN

VL DG rear stud round, 4-pole set

OEM part number	SRTDR4	A	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9200-4RF41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame DG	A	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00568	SRTFF3	Siemens	rear-stud	STATUS UNKNOWN

VL FG rear stud flat, 3-pole set

OEM part number	SRTFF3	A	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9300-4RM31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00569	SRTFF4	Siemens	rear-stud	STATUS UNKNOWN

VL FG rear stud flat, 4-pole set

OEM part number	SRTFF4	A	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9300-4RN41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00566	SRTFR3	Siemens	rear-stud	STATUS UNKNOWN

VL FG rear stud round, 3-pole set

OEM part number	SRTFR3	A	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9300-4RC31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00567	SRTFR4	Siemens	rear-stud	STATUS UNKNOWN

VL FG rear stud round, 4-pole set

OEM part number	SRTFR4	A	S556 pp.1-3; oem_spec
Alternate / superseded numbers	3VL9300-4RF41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame FG	A	same as above
Torque values	Stud/terminal mounting 266 lb-in [30 Nm]; 40 lb-in [4.5 Nm] (as printed on sheet)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00573	SRTJF4	Siemens	rear-stud	STATUS UNKNOWN

VL JG rear stud flat, 4-pole set

OEM part number	SRTJF4	A	S557 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9400-4RN41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	133 lb-in [15 Nm]; 266 lb-in [30 Nm]; cover screws 11 lb-in [1.2 Nm] (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00574	SRTJR3	Siemens	rear-stud	STATUS UNKNOWN

VL JG rear stud round, 3-pole set

OEM part number	SRTJR3	A	S557 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9400-4RC31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	133 lb-in [15 Nm]; 266 lb-in [30 Nm]; cover screws 11 lb-in [1.2 Nm] (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00575	SRTJR4	Siemens	rear-stud	STATUS UNKNOWN

VL JG rear stud round, 4-pole set

OEM part number	SRTJR4	A	S557 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9400-4RF41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame JG	A	same as above
Torque values	133 lb-in [15 Nm]; 266 lb-in [30 Nm]; cover screws 11 lb-in [1.2 Nm] (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00577	SRTLF3	Siemens	rear-stud	STATUS UNKNOWN

VL LG rear stud flat, 3-pole set

OEM part number	SRTLF3	A	S557 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9460-4RH31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame LG	A	same as above
Torque values	133 lb-in [15 Nm]; 266 lb-in [30 Nm]; cover screws 11 lb-in [1.2 Nm] (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00578	SRTLF4	Siemens	rear-stud	STATUS UNKNOWN

VL LG rear stud flat, 4-pole set

OEM part number	SRTLF4	A	S557 pp.1-5; oem_spec
Alternate / superseded numbers	3VL9460-4RH41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame LG	A	same as above
Torque values	133 lb-in [15 Nm]; 266 lb-in [30 Nm]; cover screws 11 lb-in [1.2 Nm] (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00579	SRTMF3	Siemens	rear-stud	STATUS UNKNOWN

VL MG rear stud flat, 3-pole set

OEM part number	SRTMF3	A	S558 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9600-4RH31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame MG	A	same as above
Torque values	133 lb-in [15 Nm]; 18 lb-in [2 Nm]; 11 lb-in [1.2 Nm] (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00580	SRTMF4	Siemens	rear-stud	STATUS UNKNOWN

VL MG rear stud flat, 4-pole set

OEM part number	SRTMF4	A	S558 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9600-4RH41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame MG	A	same as above
Torque values	133 lb-in [15 Nm]; 18 lb-in [2 Nm]; 11 lb-in (as printed)	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		
Open question	*MG-NG sheet pairs SRTMF4 with both 3VL9600-4RH41 and 3VL9600-4RJ41 in different tables; verify.*		

EDH-SIE-00582	SRTNF3	Siemens	rear-stud	STATUS UNKNOWN

VL NG rear stud flat, 3-pole set

OEM part number	SRTNF3	A	S559 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9700-4RH31 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	266 lb-in [30 Nm]; 11 lb-in [1.2 Nm]	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

EDH-SIE-00583	SRTNF4	Siemens	rear-stud	STATUS UNKNOWN

VL NG rear stud flat, 4-pole set

OEM part number	SRTNF4	A	S559 pp.1-4; oem_spec
Alternate / superseded numbers	3VL9700-4RJ41 [equivalent]	A	same as above
Breaker compatibility	Sentron VL frame NG	A	same as above
Torque values	266 lb-in [30 Nm]; 11 lb-in [1.2 Nm]	A	same as above
Cross-links	Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Dimensions, Kit contents, Material, Status		

6.17 General / family not yet assigned

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00691	**LK11600N2**	Power Mod modular metering main lug kit, #2-600 kcmil	—	unknown
EDH-SIE-00695	**LK11750N2**	Power Mod modular metering main lug kit, 300-750 kcmil	—	unknown
EDH-SIE-00677	**LK12350N2**	Power Mod modular metering main lug kit, #6-350 kcmil	—	unknown
EDH-SIE-00679	**LK12500N2**	Power Mod modular metering main lug kit, 1/0-500 kcmil	—	unknown
EDH-SIE-00681	**LK12500N2E**	Power Mod modular metering main lug kit, #2-500 kcmil	—	unknown
EDH-SIE-00693	**LK12600N2**	Power Mod modular metering main lug kit, #2-600 kcmil	—	unknown
EDH-SIE-00697	**LK12750N2**	Power Mod modular metering main lug kit, 300-750 kcmil	—	unknown
EDH-SIE-00683	**LK13500N2**	Power Mod modular metering main lug kit, 1/0-500 kcmil	—	unknown
EDH-SIE-00699	**LK13750N2**	Power Mod modular metering main lug kit, 300-750 kcmil	—	unknown
EDH-SIE-00701	**LK13750N2E**	Power Mod modular metering main lug kit, 300-750 kcmil	—	unknown
EDH-SIE-00685	**LK14500N2**	Power Mod modular metering main lug kit, 1/0-500 kcmil	—	unknown
EDH-SIE-00687	**LK14500N2E**	Power Mod modular metering main lug kit, 1/0-500 kcmil	—	unknown
EDH-SIE-00689	**LK15600N2**	Power Mod modular metering main lug kit, 1/0-600 kcmil	—	unknown
EDH-SIE-00703	**LK15750N2**	Power Mod modular metering main lug kit, 300-750 kcmil	—	unknown
EDH-SIE-00705	**LK16750N2**	Power Mod modular metering main lug kit, 1/0-750 kcmil	—	unknown
EDH-SIE-00692	**LK31600N2**	Power Mod modular metering main lug kit, #2-600 kcmil	—	unknown
EDH-SIE-00696	**LK31750N2**	Power Mod modular metering main lug kit, 300-750 kcmil	—	unknown
EDH-SIE-00678	**LK32350N2**	Power Mod modular metering main lug kit, #6-350 kcmil	—	unknown
EDH-SIE-00680	**LK32500N2**	Power Mod modular metering main lug kit, 1/0-500 kcmil	—	unknown
EDH-SIE-00682	**LK32500N2E**	Power Mod modular metering main lug kit, #2-500 kcmil	—	unknown
EDH-SIE-00694	**LK32600N2**	Power Mod modular metering main lug kit, #2-600 kcmil	—	unknown
EDH-SIE-00698	**LK32750N2**	Power Mod modular metering main lug kit, 300-750 kcmil	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00684	**LK33500N2**	Power Mod modular metering main lug kit, 1/0-500 kcmil	—	unknown
EDH-SIE-00700	**LK33750N2**	Power Mod modular metering main lug kit, 300-750 kcmil	—	unknown
EDH-SIE-00702	**LK33750N2E**	Power Mod modular metering main lug kit, 300-750 kcmil	—	unknown
EDH-SIE-00686	**LK34500N2**	Power Mod modular metering main lug kit, 1/0-500 kcmil	—	unknown
EDH-SIE-00688	**LK34500N2E**	Power Mod modular metering main lug kit, 1/0-500 kcmil	—	unknown
EDH-SIE-00690	**LK35600N2**	Power Mod modular metering main lug kit, 1/0-600 kcmil	—	unknown
EDH-SIE-00704	**LK35750N2**	Power Mod modular metering main lug kit, 300-750 kcmil	—	unknown
EDH-SIE-00706	**LK36750N2**	Power Mod modular metering main lug kit, 1/0-750 kcmil	—	unknown

EDH-SIE-00691 **LK11600N2** Siemens main-lug-kit **STATUS UNKNOWN**

Power Mod modular metering main lug kit, #2-600 kcmil

OEM part number	LK11600N2	**A**	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range #2-600 kcmil, lug quantity 3 (table columns by lug type)	**A**	same as above
Application	Power Mod modular metering (meter stack) line/main connection	**A**	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	**A**	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00695 **LK11750N2** Siemens main-lug-kit **STATUS UNKNOWN**

Power Mod modular metering main lug kit, 300-750 kcmil

OEM part number	LK11750N2	**A**	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 300-750 kcmil, lug quantity 3 (table columns by lug type)	**A**	same as above
Application	Power Mod modular metering (meter stack) line/main connection	**A**	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	**A**	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00677 **LK12350N2** Siemens main-lug-kit **STATUS UNKNOWN**

Power Mod modular metering main lug kit, #6-350 kcmil

OEM part number	LK12350N2	**A**	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range #6-350 kcmil, lug quantity 3 (table columns by lug type)	**A**	same as above
Application	Power Mod modular metering (meter stack) line/main connection	**A**	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	**A**	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00679	LK12500N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 1/0-500 kcmil

OEM part number	LK12500N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 1/0-500 kcmil, lug quantity 3 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00681	LK12500N2E	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, #2-500 kcmil

OEM part number	LK12500N2E	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range #2-500 kcmil, lug quantity 6 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00693	LK12600N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, #2-600 kcmil

OEM part number	LK12600N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range #2-600 kcmil, lug quantity 6 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00697	LK12750N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 300-750 kcmil

OEM part number	LK12750N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 300-750 kcmil, lug quantity 6 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00683	LK13500N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 1/0-500 kcmil

OEM part number	LK13500N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 1/0-500 kcmil, lug quantity 3+3 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00699	LK13750N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 300-750 kcmil

OEM part number	LK13750N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 300-750 kcmil, lug quantity 3+3 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00701	LK13750N2E	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 300-750 kcmil

OEM part number	LK13750N2E	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 300-750 kcmil, lug quantity 9 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00685	LK14500N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 1/0-500 kcmil

OEM part number	LK14500N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 1/0-500 kcmil, lug quantity 6 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00687	LK14500N2E	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 1/0-500 kcmil

OEM part number	LK14500N2E	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 1/0-500 kcmil, lug quantity 3+6 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00689	LK15600N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 1/0-600 kcmil

OEM part number	LK15600N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 1/0-600 kcmil, lug quantity 6+3 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00703	LK15750N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 300-750 kcmil

OEM part number	LK15750N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 300-750 kcmil, lug quantity 6+3 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00705	LK16750N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 1/0-750 kcmil

OEM part number	LK16750N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 1/0-750 kcmil, lug quantity 9 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00692	LK31600N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, #2-600 kcmil

OEM part number	LK31600N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range #2-600 kcmil, lug quantity 4 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00696	LK31750N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 300-750 kcmil

OEM part number	LK31750N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 300-750 kcmil, lug quantity 4 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00678	LK32350N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, #6-350 kcmil

OEM part number	LK32350N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range #6-350 kcmil, lug quantity 4 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00680	LK32500N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 1/0-500 kcmil

OEM part number	LK32500N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 1/0-500 kcmil, lug quantity 4 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00682	LK32500N2E	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, #2-500 kcmil

OEM part number	LK32500N2E	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range #2-500 kcmil, lug quantity 8 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00694	LK32600N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, #2-600 kcmil

OEM part number	LK32600N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range #2-600 kcmil, lug quantity 8 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00698	LK32750N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 300-750 kcmil

OEM part number	LK32750N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 300-750 kcmil, lug quantity 8 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00684	LK33500N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 1/0-500 kcmil

OEM part number	LK33500N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 1/0-500 kcmil, lug quantity 4+4 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00700	LK33750N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 300-750 kcmil

OEM part number	LK33750N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 300-750 kcmil, lug quantity 4+4 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00702	LK33750N2E	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 300-750 kcmil

OEM part number	LK33750N2E	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 300-750 kcmil, lug quantity 12 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00686	LK34500N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 1/0-500 kcmil

OEM part number	LK34500N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 1/0-500 kcmil, lug quantity 8 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00688	LK34500N2E	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 1/0-500 kcmil

OEM part number	LK34500N2E	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 1/0-500 kcmil, lug quantity 4+8 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00690	LK35600N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 1/0-600 kcmil

OEM part number	LK35600N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 1/0-600 kcmil, lug quantity 8+4 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00704	LK35750N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 300-750 kcmil

OEM part number	LK35750N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 300-750 kcmil, lug quantity 8+4 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

EDH-SIE-00706	LK36750N2	Siemens	main-lug-kit	STATUS UNKNOWN

Power Mod modular metering main lug kit, 1/0-750 kcmil

OEM part number	LK36750N2	A	S588 p.1 table; oem_spec
Description	Stud-mounted lug kit for Power Mod modular metering (main/tap lugs on threaded studs), wire range 1/0-750 kcmil, lug quantity 12 (table columns by lug type)	A	same as above
Application	Power Mod modular metering (meter stack) line/main connection	A	same as above
Torque values	Lugs to studs with 1/2in Keps nuts and washers 450-500 lb-in; wire binding screw 500 lb-in (1/0-750 and 300-800 kcmil lugs), 275 lb-in (#6-350), 375 lb-in (#2-600)	A	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Which lug type (column) applies to multi-type kits ('3+3' etc.) to be confirmed from PDF table layout.*		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00395	**BxxCVR**	Panelboard box extension cover (catalog pattern B<06-48><S|F>CVR)	—	unknown

EDH-SIE-00395	BxxCVR	Siemens lineage	trim	STATUS UNKNOWN

Panelboard box extension cover (catalog pattern B<06-48><S|F>CVR)

OEM part number	BxxCVR	A	S354 single sheet; oem_spec
Kit contents	Extension cover; J-clips and mounting screws (4 each for 6-24 in covers, 6 each for 30-48 in covers)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1144-01 Rev. 00: BXXCVR extension cover mounting instructions	A	same as above
Oem part number pattern	BXXCVR: XX = cover size 06, 12, 18, 24, 30, 36, 42, 48 in; type S = surface, F = flush	A	S354 single sheet; oem_spec

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00777	**ECMBR1**	Siemens Main breaker retainer for EQ load centers	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00778	**ECMBR2**	Siemens Main breaker retainer for Ultimate load centers (Ultimate load center main breakers)	—	unknown

EDH-SIE-00777	ECMBR1	Siemens	hardware-kit	STATUS UNKNOWN

Siemens Main breaker retainer for EQ load centers

OEM part number	ECMBR1	**A**	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Main breaker retainer for EQ load centers; 1 piece.	**A**	same as above
Application	main	**A**	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Load-center item; listed for completeness of hold-down/retainer scope.*		

EDH-SIE-00778	ECMBR2	Siemens	hardware-kit	STATUS UNKNOWN

Siemens Main breaker retainer for Ultimate load centers (Ultimate load center main breakers)

OEM part number	ECMBR2	**A**	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Main breaker retainer for Ultimate load centers (Ultimate load center main breakers); 1 piece.	**A**	same as above
Application	main	**A**	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Load-center item; listed for completeness of hold-down/retainer scope.*		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00763	**ECQTH2**	Siemens Handle tie for (2) QT Duplex breakers	Type QT Duplex **A**	unknown

EDH-SIE-00763	ECQTH2	Siemens	handle-lock	STATUS UNKNOWN

Siemens Handle tie for (2) QT Duplex breakers

OEM part number	ECQTH2	**A**	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Handle tie for (2) QT Duplex breakers.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Type QT Duplex	**A**	same as above
Kit contents	Standard package: 25 pieces	**A**	same as above
Not yet documented	Dimensions, Material, Status		
Open question	*Catalog table also prints ECQTH2/ECQTH3 under "Handle Blocking Device" (QP/BL/BQ 1P; QT-Duplex) - apparent typesetting error; photos caption ECQL1 and ECBX231M as handle blocking devices.*		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00760	**ECQLD4**	Siemens Padlocking device for QT-Duplex breakers	Type QT-Duplex **A**	unknown
EDH-SIE-00761	**ECQLN3**	Siemens Padlocking device for 150-225 A MBKA main breakers, QN, QNR	150-225 MBKA, QN, QNR **A**	unknown

EDH-SIE-00760	ECQLD4	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device for QT-Duplex breakers

OEM part number	ECQLD4	**A**	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Padlocking device for QT-Duplex breakers.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Type QT-Duplex	**A**	same as above
Kit contents	Standard package: 10 pieces	**A**	same as above
Not yet documented	Dimensions, Material, Status		

EDH-SIE-00761	ECQLN3	Siemens	padlock-attachment	STATUS UNKNOWN

Siemens Padlocking device for 150-225 A MBKA main breakers, QN, QNR

OEM part number	ECQLN3	**A**	S203 p. 7-158, Circuit Breaker Accessories (General); oem_spec
Description	Padlocking device for 150-225 A MBKA main breakers, QN, QNR.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	150-225 MBKA, QN, QNR	**A**	same as above
Kit contents	Standard package: 1 piece	**A**	same as above
Not yet documented	Dimensions, Material, Status		

7 Federal Pacific Electric

Lineage / brand markings: Federal Pacific Electric (Stab-Lok, NA/NE/NF/NH panelboards)

Family	Type	Status	Era	Entries	Pg
BDP FPE BDP distribution panelboard (double-hole bus)	panelboard	Obsolete; OEM-numbered kits KBDP1C-KBDP5C and aftermarket NEF3K/NEJ3K/NJL3K still traded	—	6	1847
CDP FPE CDP distribution panelboard (single-hole bus)	panelboard	Obsolete; aftermarket/replacement kits and recertified breakers still sold by FPE-successor (Circuit Breaker Sales / fpeparts.com) and surplus dealers	Advertised May 1962: distribution panelboards types NHDP and CDP with rotary-handle breakers 15-800 A	10	1852
FDP FPE FDP fusible distribution panelboard / QMQB switchboard	panelboard	Obsolete; QMQB switches and KFDP/KQB strap/link kits still traded as recertified/new-surplus	—	19	1858
NA1B FPE NA1B / NH1B lighting and appliance panelboards	panelboard	Obsolete	—	5	1865
NBLP FPE NBLP / NQLP bolt-on lighting panelboards	panelboard	Obsolete; Schneider Electric states it no longer offers replacement breakers for Federal Pacific switchboards/panelboards	—	1	1867
NDP FPE NDP panelboard	panelboard	Obsolete	—	2	1867
FPE-SWBD FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	switchboard	Obsolete; recertified NJL/NJJ/NM/NP breakers and NN switches sold for legacy FPE switchboards	—	6	1868

7.1 BDP — FPE BDP distribution panelboard (double-hole bus)

FAM-FPE-002 · panelboard · aka BDP Spectra bolt-on (as listed by Superbreakers - likely erroneous), BDP panel board · markings: FPE, Federal Pacific

FPE BDP is a distribution panelboard with a 'double hole bus' (Superbreakers) using twin bus-connection kits KBDP1C-KBDP5C per breaker frame. Breaker King sells PCS aftermarket assemblies NEF3K/NEJ3K/NJL3K replacing KBDP1C/KBDP2C/KBDP4C. Superbreakers labels KBDP1C as 240 V 100 A for 'BDP Spectra Bolt-on' panelboards - the 'Spectra' wording appears to be a listing error (Spectra is a GE name).

Attribute	Value	Cl.	Sources
Status	Obsolete; OEM-numbered kits KBDP1C-KBDP5C and aftermarket NEF3K/NEJ3K/NJL3K still traded	C	S206, S208, S209 distributor
Branch breakers accepted	NE/NEF/HEG (KBDP1C), NEJ/NEJH/HEJ (KBDP2C), [KBDP3C frame not stated], NJL/HJL (KBDP4C), NM/HNM (KBDP5C)	C	S206, S209 distributor
History	Federal Pacific Electric (Newark NJ); Stab-Lok trademark registered c.1950-51; Reliance Electric bought FPE from UV Industries in 1979; in 1986 Reliance exited breakers: breaker business to American Circuit Breaker Corp (ACBC), non-breaker parts to Electro-Mechanical Corp, Federal name -> Challenger Electric; aftermarket plant (Newark->Linden NJ) passed Challenger -> Westinghouse -> Cutler-Hammer; closed 1995 and inventory bought by John Cifrodella forming Federal Pacific Equipment Inc.; Circuit Breaker Sales (Matthews NC) acquired Federal Pacific Equipment (2007 per Wikipedia, uncited) including equipment and technical documents.	C	S214, S213 other

Breaker families associated: NE / NEF / NEG / HEF / HEG (N-frame 100 A class), NEJ / NEJH / HEJ (N-frame 225 A class), NJL / HJL / NJ / NJJ (N-frame 400 A class), NM / HM / NN / NP / NK (large N-frames)
Key documents: S206 Breaker Mounting Kits :: Federal Pacific Electric (category listing); S208 Federal Pacific Breaker Parts & Accessories Catalog; S209 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S213 About Federal Pacific Electric Equipment (history); S214 Federal Pacific Electric Corporation
Also fits this family (entry printed elsewhere): KFDP-5C

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00006	**BBDPNEF10FPE**	Aftermarket bus connection kit BBDPNEF10FPE (seller cross-ref to FPE KBDP1C)	mounts two NE/NEF frame breakers **C**	current aftermarket item; listing label '(PCS) Aftermarket A
EDH-OTH-00007	**BBDPNEJFPE**	Aftermarket bus connection kit BBDPNEJFPE (seller cross-ref to FPE KBDP2C)	mounts two NEJ frame breakers **C**	current aftermarket item; listing label '(PCS) Aftermarket A
EDH-OTH-00008	**BBDPNJLFPE**	Aftermarket bus connection kit BBDPNJLFPE (seller cross-ref to FPE KBDP4C)	mounts two NJL frame breakers **C**	current aftermarket item; listing label '(PCS) Aftermarket A
EDH-FPE-00007	**KBDP1C**	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	Two NE/NEF/HEG frame breakers; 'three pole and twin mount' **C**	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00008	**KBDP2C**	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	NEJ, NEJH, HEJ frames **C**	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00009	**KBDP3C**	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	Twin mount into BDP (double hole bus); frame not stated by source **C**	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00010	**KBDP4C**	FPE BDP twin bus-connection kit, NJL/HJL frame	Two NJL/HJL frame breakers **C**	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00011	**KBDP5C**	FPE BDP mounting kit, NM/HNM frame	NM and HNM breaker types **C**	discontinued (OEM); traded as new-surplus/aftermarket

EDH-OTH-00006	**BBDPNEF10FPE**	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BBDPNEF10FPE (seller cross-ref to FPE KBDP1C)

OEM part number	BBDPNEF10FPE (Breaker King catalog/model number)	**C**	S206 distributor
Alternate / superseded numbers	KBDP1C [equivalent] (seller cross-reference: 'Kit # NEF3K replaces OEM KBDP1C')	**C**	same as above
	NEF3K [alias] (seller/PCS kit number quoted in listing)	**C**	same as above
Description	Bus connection hardware for FPE BDP panelboards; mounts two NE/NEF frame breakers (seller listing text (may be truncated))	**C**	same as above
Breaker compatibility	mounts two NE/NEF frame breakers (seller claim; compatibility from distributor only)	**C**	same as above
Status	current aftermarket item; listing label '(PCS) Aftermarket Assembly' (seller claim)	**C**	same as above
Replacement / successor	Seller states it replaces OEM KBDP1C ('Kit # NEF3K replaces OEM KBDP1C') (seller claim; not OEM-verified; no listing/UL statement on page)	**C**	same as above
Aftermarket / reproduction	Seller identifies maker/brand as 'PCS' aftermarket kit (seller claim; PCS not further identified)	**C**	same as above
Cross-links	Families: BDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00007	BBDPNEJFPE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BBDPNEJFPE (seller cross-ref to FPE KBDP2C)

OEM part number	BBDPNEJFPE (Breaker King catalog/model number)	C	S206 distributor
Alternate / superseded numbers	KBDP2C [equivalent] (seller cross-reference: 'Kit # NEJ3K replaces OEM KBDP2C')	C	same as above
	NEJ3K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for FPE BDP panelboards; mounts two NEJ frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two NEJ frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label '(PCS) Aftermarket Assembly' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KBDP2C ('Kit # NEJ3K replaces OEM KBDP2C') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Aftermarket / reproduction	Seller identifies maker/brand as 'PCS' aftermarket kit (seller claim; PCS not further identified)	C	same as above
Cross-links	Families: BDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00008	BBDPNJLFPE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BBDPNJLFPE (seller cross-ref to FPE KBDP4C)

OEM part number	BBDPNJLFPE (Breaker King catalog/model number)	C	S206 distributor
Alternate / superseded numbers	KBDP4C [equivalent] (seller cross-reference: 'Kit # NJL3K replaces OEM KBDP4C')	C	same as above
	NJL3K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for FPE BDP panelboards; mounts two NJL frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two NJL frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label '(PCS) Aftermarket Assembly' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KBDP4C ('Kit # NJL3K replaces OEM KBDP4C') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Aftermarket / reproduction	Seller identifies maker/brand as 'PCS' aftermarket kit (seller claim; PCS not further identified)	C	same as above
Cross-links	Families: BDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-FPE-00007	KBDP1C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP twin bus-connection kit, NE/NEF/HEG frame

OEM part number	KBDP1C	C	S206, S208, S209, S215 distributor
Alternate / superseded numbers	KBDP-1C	C	S208 alias; distributor
	NEF3K (PCS aftermarket assembly; Breaker King SKU BBDPNEF10FPE)	C	S206, S208 equivalent; distributor
Description	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	C	S206, S208, S209, S215 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S206, S208, S209, S215 inference
Breaker compatibility	Two NE/NEF/HEG frame breakers; 'three pole and twin mount'	C	S206, S208, S209, S215 distributor
Voltage rating	240 V (Superbreakers) (Conflicts with 600 V class of family; NEF breakers are 480 V)	D	S209 distributor
Current rating	100 A	C	S209, S208 distributor
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S207, S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S206, S208, S209, S215 distributor
Aftermarket / reproduction	Breaker King offers BBDPNEF10FPE (kit # NEF3K) as a replacement ('Kit # NEF3K replaces OEM KBDP1C'), labelled '(PCS) Aftermarket Assembly' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S206 distributor
Cross-links	Families: BDP · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00008	KBDP2C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame

OEM part number	KBDP2C	C	S206, S208, S209 distributor
Alternate / superseded numbers	KBDP-2C	C	S208 alias; distributor
	NEJ3K (PCS aftermarket; Breaker King SKU BBDPNEJFPE)	C	S206, S208 equivalent; distributor
Description	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	C	S206, S208, S209 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S206, S208, S209 inference
Breaker compatibility	NEJ, NEJH, HEJ frames	C	S206, S208, S209 distributor
Voltage rating	600 V	C	S209 distributor
Current rating	225 A	C	S209, S208 distributor
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S207, S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S206, S208, S209 distributor
Aftermarket / reproduction	Breaker King offers BBDPNEJFPE (kit # NEJ3K) as a replacement ('Kit # NEJ3K replaces OEM KBDP2C'), labelled '(PCS) Aftermarket Assembly' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S206 distributor
Cross-links	Families: BDP · Breakers: NEJ / NEJH / HEJ (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00009	KBDP3C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)

OEM part number	KBDP3C	C	S208, S209 distributor
Alternate / superseded numbers	KBDP-3C	C	S208 alias; distributor
	NFJ3K (PCS aftermarket, 225 A max) - probable equivalent by numbering pattern [equivalent]	D	same as above
Description	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	C	S208, S209 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S208, S209 inference
Breaker compatibility	Twin mount into BDP (double hole bus); frame not stated by source	C	S208, S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: BDP · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Confirm KBDP3C is the NFJ/HFJ kit (pattern 1=NE,2=NEJ,3=NFJ,4=NJL,5=NM).*		

EDH-FPE-00010	KBDP4C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP twin bus-connection kit, NJL/HJL frame

OEM part number	KBDP4C	C	S206, S208, S209 distributor
Alternate / superseded numbers	KBDP-4C	C	S208 alias; distributor
	NJL3K (PCS aftermarket; Breaker King SKU BBDPNJLFPE)	C	S206, S208 equivalent; distributor
Description	FPE BDP twin bus-connection kit, NJL/HJL frame	C	S206, S208, S209 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S206, S208, S209 inference
Breaker compatibility	Two NJL/HJL frame breakers	C	S206, S208, S209 distributor
Current rating	400 A max (per NJL3K)	C	S208 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S207, S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S206, S208, S209 distributor
Aftermarket / reproduction	Breaker King offers BBDPNJLFPE (kit # NJL3K) as a replacement ('Kit # NJL3K replaces OEM KBDP4C'), labelled '(PCS) Aftermarket Assembly' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S206 distributor
Cross-links	Families: BDP · Breakers: NJL / HJL / NJ / NJJ (N-frame 400 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00011	KBDP5C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP mounting kit, NM/HNM frame

OEM part number	KBDP5C	C	S209 distributor
Description	FPE BDP mounting kit, NM/HNM frame	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S209 inference
Breaker compatibility	NM and HNM breaker types	C	S209 distributor
Voltage rating	600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: BDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

7.2 CDP — FPE CDP distribution panelboard (single-hole bus)

FAM-FPE-001 · panelboard · aka CDP panel board, CDP panelboard, NHDP · markings: American (ACBC), FPE, Federal Pacific

FPE CDP is a commercial/industrial distribution panelboard using a 'single hole bus' (per Superbreakers description) onto which pairs of N-frame bolt-on molded-case breakers are mounted with OEM bus connection ('link') kits KCDP1C through KCDP5C, one kit per breaker frame family. Each kit (per Breaker King) includes screws, brackets and a deadfront cover plate and mounts two breakers (twin). Aftermarket equivalents NEF1K, NEJ1K, NFJ1K, NJL1K are cross-referenced to the OEM kits. NN-frame switches (e.g., NN633120NA) are also described as fitting CDP panelboards.

Evidence record: 1962 FPE advertisement - NHDP and CDP distribution panelboards with individually lockable rotary-handle breakers 15-800 A, all-steel front panel, individually grounded cover plates.

Attribute	Value	Cl.	Sources
Status	Obsolete; aftermarket/replacement kits and recertified breakers still sold by FPE-successor (Circuit Breaker Sales / fpeparts.com) and surplus dealers	C	S212, S206, S209 distributor
Era of manufacture	Advertised May 1962: distribution panelboards types NHDP and CDP with rotary-handle breakers 15-800 A	A	S455 ECM May 1962 FPE ad; oem_spec
	FPE commercial distribution panelboard line; obsolete. Exact production years not documented in sources found.	D	S212, S206 inference
Successor	No direct OEM successor. Parts support: Federal Pacific Equipment -> Circuit Breaker Sales (fpeparts.com); aftermarket kits NEF1K/NEJ1K/NFJ1K/NJL1K (PCS) replace OEM KCDP1C-KCDP4C.	C	S206, S212, S213 distributor
Voltage rating	600 V class (kits KCDP1C, KCDP5C listed 600 V)	C	S209 distributor
Branch breakers accepted	FPE rotary-handle molded case breakers 15-800 A (1962)	A	S455 oem_spec
	NE/NEF (KCDP1C), NEJ/HEJ (KCDP2C), NFJ/HFJ (KCDP3C), NJL/HJL (KCDP4C), NM/NN (KCDP5C) twin-mounted via bus connection kits	C	S206, S208, S209 distributor
Bus type	single hole bus (CDP) vs double hole bus (BDP)	C	S209 Superbreakers KCDP3C/KCDP4C/KBDP3C/KBDP4C descriptions; distributor
History	Federal Pacific Electric (Newark NJ); Stab-Lok trademark registered c.1950-51; Reliance Electric bought FPE from UV Industries in 1979; in 1986 Reliance exited breakers: breaker business to American Circuit Breaker Corp (ACBC), non-breaker parts to Electro-Mechanical Corp, Federal name -> Challenger Electric; aftermarket plant (Newark->Linden NJ) passed Challenger -> Westinghouse -> Cutler-Hammer; closed 1995 and inventory bought by John Cifrodella forming Federal Pacific Equipment Inc.; Circuit Breaker Sales (Matthews NC) acquired Federal Pacific Equipment (2007 per Wikipedia, uncited) including equipment and technical documents.	C	S214, S213 other

Breaker families associated: NE / NEF / NEG / HEF / HEG (N-frame 100 A class), NEJ / NEJH / HEJ (N-frame 225 A class), NF / NFJ / HFJ / NFS (N-frame 225 A class), NJL / HJL / NJ / NJJ (N-frame 400 A class), NM / HM / NN / NP / NK (large N-frames)

Key documents: S206 Breaker Mounting Kits :: Federal Pacific Electric (category listing); S207 Federal Pacific CDP [BCDPNJLFPE] product page; S208 Federal Pacific Breaker Parts & Accessories Catalog; S209 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S212 Federal Pacific Electric panelboard connector kits; S213 About Federal Pacific Electric Equipment (history); S214 Federal Pacific Electric Corporation; S455 sim_ecm_1962-05_61_5 Electrical Construction and Maintenance, Vol 61 No 5, May 1962 - Federal Pacific Electric

Also fits this family (entry printed elsewhere): NM34, NM36, NM38, N32

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00002	**BCDPNEF10FPE**	Aftermarket bus connection kit BCDPNEF10FPE (seller cross-ref to FPE KCDP1C)	mounts two NE/NEF frame breakers C	current aftermarket item; listing label 'FPE Aftermarket Rep
EDH-OTH-00003	**BCDPNEJFPE**	Aftermarket bus connection kit BCDPNEJFPE (seller cross-ref to FPE KCDP2C)	mounts two NEJ frame breakers C	current aftermarket item; listing label 'FPE Aftermarket Rep
EDH-OTH-00004	**BCDPNFJFPE**	Aftermarket bus connection kit BCDPNFJFPE (seller cross-ref to FPE KCDP3C)	mounts two NFJ frame breakers C	current aftermarket item; listing label 'FPE Aftermarket Rep
EDH-OTH-00005	**BCDPNJLFPE**	Aftermarket bus connection kit BCDPNJLFPE (seller cross-ref to FPE KCDP4C)	mounts two (2) NJL, HJL frame circuit breakers; kits include detailed C	current aftermarket item; listing label 'FPE Aftermarket Rep
EDH-FPE-00001	**KCDP1C**	FPE CDP twin bus-connection kit, NE/NEF frame	Two NE/NEF frame breakers (Breaker King); 'twin mount ... single hole C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00002	**KCDP2C**	FPE CDP twin bus-connection kit, NEJ/HEJ frame	Two NEJ/HEJ frame breakers C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00003	**KCDP3C**	FPE CDP twin bus-connection kit, NFJ/HFJ frame	Two NFJ/HFJ frame breakers C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00004	**KCDP4C**	FPE CDP twin bus-connection kit, NJL/HJL frame	Two NJL/HJL frame breakers C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00005	**KCDP5C**	FPE CDP link kit, NM/NN frame	NM and NN breaker/switch frames in CDP panel ('CDP LINK KIT NM NN BREA C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-OTH-00002	BCDPNEF10FPE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BCDPNEF10FPE (seller cross-ref to FPE KCDP1C)

OEM part number	BCDPNEF10FPE (Breaker King catalog/model number)	C	S206 distributor
Alternate / superseded numbers	KCDP1C [equivalent] (seller cross-reference: 'Kit # NEF1K replaces OEM KCDP1C')	C	same as above
	NEF1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for FPE CDP panelboards; mounts two NE/NEF frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two NE/NEF frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'FPE Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KCDP1C ('Kit # NEF1K replaces OEM KCDP1C') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00003	BCDPNEJFPE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BCDPNEJFPE (seller cross-ref to FPE KCDP2C)

OEM part number	BCDPNEJFPE (Breaker King catalog/model number)	C	S206 distributor
Alternate / superseded numbers	KCDP2C [equivalent] (seller cross-reference: 'Kit # NEJ1K replaces OEM KCDP2C')	C	same as above
	NEJ1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for FPE CDP panelboards; mounts two NEJ frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two NEJ frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'FPE Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KCDP2C ('Kit # NEJ1K replaces OEM KCDP2C') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00004	BCDPNFJFPE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BCDPNFJFPE (seller cross-ref to FPE KCDP3C)

OEM part number	BCDPNFJFPE (Breaker King catalog/model number)	C	S206 distributor
Alternate / superseded numbers	KCDP3C [equivalent] (seller cross-reference: 'Kit # NFJ1K replaces OEM KCDP3C')	C	same as above
	NFJ1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for FPE CDP panelboards; mounts two NFJ frame breakers (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two NFJ frame breakers (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'FPE Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KCDP3C ('Kit # NFJ1K replaces OEM KCDP3C') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-OTH-00005	BCDPNJLFPE	Breaker King (aftermarket/PCS-brand kit per seller)	branch-connector-kit	CURRENT AFTERMARKET IT

Aftermarket bus connection kit BCDPNJLFPE (seller cross-ref to FPE KCDP4C)

OEM part number	BCDPNJLFPE (Breaker King catalog/model number)	C	S206 distributor
Alternate / superseded numbers	KCDP4C [equivalent] (seller cross-reference: 'Kit # NJL1K replaces OEM KCDP4C')	C	same as above
	NJL1K [alias] (seller/PCS kit number quoted in listing)	C	same as above
Description	Bus connection hardware for CDP panelboards; mounts two (2) NJL, HJL frame circuit breakers; kits include detailed safety and installation instructions, all necessary screws, brackets and a deadfront cover plate (seller listing text (may be truncated))	C	same as above
Breaker compatibility	mounts two (2) NJL, HJL frame circuit breakers; kits include detailed safety and installation instructions, all necessary screws, brackets and a deadfront cover plate (seller claim; compatibility from distributor only)	C	same as above
Status	current aftermarket item; listing label 'FPE Aftermarket Replacement' (seller claim)	C	same as above
Replacement / successor	Seller states it replaces OEM KCDP4C ('Kit # NJL1K replaces OEM KCDP4C') (seller claim; not OEM-verified; no listing/UL statement on page)	C	same as above
Cross-links	Families: CDP		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Listing / approvals, Material, Torque values		
Open question	*Who is 'PCS' (maker of Breaker King aftermarket kits)? Is the kit tested/listed with the panelboard?*		

EDH-FPE-00001	KCDP1C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP twin bus-connection kit, NE/NEF frame

OEM part number	KCDP1C	C	S206, S208, S209, S215 distributor
Alternate / superseded numbers	KCDP-1C	C	S208 alias; distributor
	NEF1K (PCS aftermarket; Breaker King SKU BCDPNEF10FPE) (aftermarket assembly; not OEM)	C	S206, S208 equivalent; distributor
Description	FPE CDP twin bus-connection kit, NE/NEF frame	C	S206, S208, S209, S215 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S206, S208, S209, S215 inference
Breaker compatibility	Two NE/NEF frame breakers (Breaker King); 'twin mount ... single hole bus Federal Pacific CDP panel board' (Superbreakers); 600 V tag	C	S206, S208, S209, S215 distributor
Voltage rating	600 V	C	S209 distributor
Current rating	100 A max (per NEF1K listing)	C	S208 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S207, S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S206, S208, S209, S215 distributor
Aftermarket / reproduction	Breaker King offers BCDPNEF10FPE (kit # NEF1K) as a replacement ('Kit # NEF1K replaces OEM KCDP1C'), labelled 'FPE Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S206 distributor
Cross-links	Families: CDP · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00002	KCDP2C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP twin bus-connection kit, NEJ/HEJ frame

OEM part number	KCDP2C	C	S206, S208, S209 distributor
Alternate / superseded numbers	KCDP-2C	C	S208 alias; distributor
	NEJ1K (PCS aftermarket; Breaker King SKU BCDPNEJFPE)	C	S206, S208 equivalent; distributor
Description	FPE CDP twin bus-connection kit, NEJ/HEJ frame	C	S206, S208, S209 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S206, S208, S209 inference
Breaker compatibility	Two NEJ/HEJ frame breakers	C	S206, S208, S209 distributor
Voltage rating	600 V	C	S209 distributor
Current rating	225 A max (per NEJ1K listing)	C	S208 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S207, S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S206, S208, S209 distributor
Aftermarket / reproduction	Breaker King offers BCDPNEJFPE (kit # NEJ1K) as a replacement ('Kit # NEJ1K replaces OEM KCDP2C'), labelled 'FPE Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S206 distributor
Cross-links	Families: CDP · Breakers: NEJ / NEJH / HEJ (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00003	KCDP3C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP twin bus-connection kit, NFJ/HFJ frame

OEM part number	KCDP3C	C	S206, S208, S209 distributor
Alternate / superseded numbers	KCDP-3C	C	S208 alias; distributor
	NFJ1K (PCS aftermarket; Breaker King SKU BCDPNFJFPE)	C	S206, S208 equivalent; distributor
Description	FPE CDP twin bus-connection kit, NFJ/HFJ frame	C	S206, S208, S209 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S206, S208, S209 inference
Breaker compatibility	Two NFJ/HFJ frame breakers	C	S206, S208, S209 distributor
Current rating	225 A max (per NFJ1K listing)	C	S208 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S207, S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S206, S208, S209 distributor
Aftermarket / reproduction	Breaker King offers BCDPNFJFPE (kit # NFJ1K) as a replacement ('Kit # NFJ1K replaces OEM KCDP3C'), labelled 'FPE Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S206 distributor
Cross-links	Families: CDP · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00004	KCDP4C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP twin bus-connection kit, NJL/HJL frame

OEM part number	KCDP4C	C	S206, S207, S208, S209 distributor
Alternate / superseded numbers	KCDP-4C	C	S208 alias; distributor
	NJL1K (PCS aftermarket; Breaker King SKU BCDPNJLFPE)	C	S206, S207, S208 equivalent; distributor
Description	FPE CDP twin bus-connection kit, NJL/HJL frame	C	S206, S207, S208, S209 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S206, S207, S208, S209 inference
Breaker compatibility	Two NJL/HJL frame breakers	C	S206, S207, S208, S209 distributor
Current rating	400 A max (per NJL1K listing)	C	S208 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S207, S209 distributor
Dimensions	Shipping weight 7 lb (aftermarket NJL1K equivalent)	C	S207 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S206, S207, S208, S209 distributor
Aftermarket / reproduction	Breaker King offers BCDPNJLFPE (kit # NJL1K) as a replacement ('Kit # NJL1K replaces OEM KCDP4C'), labelled 'FPE Aftermarket Replacement' (seller claim; seller cross-reference; equivalence/listing not verified)	C	S206 distributor
Cross-links	Families: CDP · Breakers: NJL / HJL / NJ / NJJ (N-frame 400 A class)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00005	KCDP5C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP link kit, NM/NN frame

OEM part number	KCDP5C	C	S208, S209 distributor
Alternate / superseded numbers	KCDP-5C	C	S208 alias; distributor
Description	FPE CDP link kit, NM/NN frame	C	S208, S209 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S208, S209 inference
Breaker compatibility	NM and NN breaker/switch frames in CDP panel ('CDP LINK KIT NM NN BREAKERS')	C	S208, S209 distributor
Voltage rating	600 V	C	S209 distributor
Current rating	225 A (Superbreakers tag - doubtful for NM/NN frames) (Rating looks inconsistent with 400-1200 A NM/NN frames)	D	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S208, S209 distributor
Cross-links	Families: CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is KCDP5C single- or twin-mount? NM frames are typically single-mount.*		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00043	**NFHARDWARE**	NF frame custom panel hardware (dealer item)	—	unknown

EDH-FPE-00043	NFHARDWARE	Federal Pacific Electric	breaker-mounting-kit	STATUS UNKNOWN

NF frame custom panel hardware (dealer item)

Description	'NF FRAME CUSTOM PANEL HARDWARE' - dealer-assigned item, not an OEM number	C	S208 surplus
Cross-links	Families: CDP · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Kit contents, Material, Torque values		

7.3 FDP — FPE FDP fusible distribution panelboard / QMQB switchboard

FAM-FPE-003 · panelboard · aka QMQB panelboard, QMQB switchboard, Federal Pacific QMQB · markings: Federal Pacific, American

FDP is FPE's fusible distribution panelboard family built around QMQB bolt-on fusible switch units ('used for QMQB and FDP style panel boards and switchgear distribution systems'). Switch units connect to the vertical bus through KFDP-series link/strap kits (KFDP2C, 3C, 4C (200 A), 46C (400 A), 66C (600 A), 7C (1200 A), plus D/S/V variants KFDPD16C, KFDPS16C, KFDPD26C, KFDPS26C, KFDPV7C) and KQB-series kits (KQB3C 15-100 A, KQB4C, KQB46C, KQB66C, KQB86C 700-800 A).

Attribute	Value	Cl.	Sources
Status	Obsolete; QMQB switches and KFDP/KQB strap/link kits still traded as recertified/new-surplus	C	S209, S208 distributor
Branch breakers accepted	QMQB fusible panelboard switches 30-1200 A, 240 V (QMQB..32..) and 600 V (QMQB..36..), 200 kA with class R/J/K/H/L fuses; single and dual/twin configurations	C	S209 distributor

Breaker families associated: QMQB fusible panelboard switch
Key documents: S208 Federal Pacific Breaker Parts & Accessories Catalog; S209 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S212 Federal Pacific Electric panelboard connector kits

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00015	**KFDP2C**	FPE FDP link/strap kit KFDP2C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00016	**KFDP3C**	FPE FDP link/strap kit KFDP3C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00018	**KFDP46C**	FPE FDP link/strap kit KFDP46C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (400 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00017	**KFDP4C**	FPE FDP link/strap kit KFDP4C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (200 A, 600 V; sin C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00026	**KFDP-5C**	FPE FDP link kit (QMQB4036R into BDP switchgear)	'QMQB4036R INTO BDP SWITCHGEAR' (relectric) - i.e., QMQB 400 A 600 V s C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00019	**KFDP66C**	FPE FDP link/strap kit KFDP66C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (600 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00020	**KFDP7C**	FPE FDP link/strap kit KFDP7C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (1200 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00021	**KFDPD16C**	FPE FDP link/strap kit KFDPD16C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (100 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00023	**KFDPD26C**	FPE FDP link/strap kit KFDPD26C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00022	**KFDPS16C**	FPE FDP link/strap kit KFDPS16C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (100 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00024	**KFDPS26C**	FPE FDP link/strap kit KFDPS26C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00025	**KFDPV7C**	FPE FDP link/strap kit KFDPV7C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (1200 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00027	**KQB3C**	FPE QMQB switch strap/link kit KQB3C	15-100 A, 600 V, dual/twin branch mounting, panelboard switch strap ki C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00029	**KQB46C**	FPE QMQB switch strap/link kit KQB46C	QMQB link kit C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00028	**KQB4C**	FPE QMQB switch strap/link kit KQB4C	QMQB link kit; 200 A (relectric KQB-4C) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00030	**KQB66C**	FPE QMQB switch strap/link kit KQB66C	QMQB strap kit C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00031	**KQB86C**	FPE QMQB switch strap/link kit KQB86C	700-800 A, 600 V QMQB panel board switch strap kit C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00032	**KQB-D26C**	FPE QMQB switch strap/link kit KQB-D26C	QMQB strap kit C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00033	**PK103T**	FPE QMQB switch strap/link kit PK103T	QMQB strap kit C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00015 **KFDP2C** Federal Pacific Electric connector-strap **DISCONTINUED (OEM); TR**

FPE FDP link/strap kit KFDP2C for QMQB switch units

OEM part number	KFDP2C	C	S208, S209 distributor
Alternate / superseded numbers	KFDP-2C	C	S208 alias; distributor
Description	FPE FDP link/strap kit KFDP2C for QMQB switch units	C	S208, S209 distributor
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S208, S209 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards	C	S208, S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00016 **KFDP3C** Federal Pacific Electric connector-strap **DISCONTINUED (OEM); TR**

FPE FDP link/strap kit KFDP3C for QMQB switch units

OEM part number	KFDP3C	C	S208, S209 distributor
Alternate / superseded numbers	KFDP-3C	C	S208 alias; distributor
Description	FPE FDP link/strap kit KFDP3C for QMQB switch units	C	S208, S209 distributor
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S208, S209 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards	C	S208, S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00018	KFDP46C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP46C for QMQB switch units

OEM part number	KFDP46C	C	S208, S209 distributor
Alternate / superseded numbers	KFDP-46C	C	S208 alias; distributor
Description	FPE FDP link/strap kit KFDP46C for QMQB switch units	C	S208, S209 distributor
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S208, S209 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (400 A, 600 V)	C	S208, S209 distributor
Current rating	400 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00017	KFDP4C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP4C for QMQB switch units

OEM part number	KFDP4C	C	S208, S209, S215 distributor
Alternate / superseded numbers	KFDP-4C	C	S208 alias; distributor
Description	FPE FDP link/strap kit KFDP4C for QMQB switch units	C	S208, S209, S215 distributor
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S208, S209, S215 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (200 A, 600 V; single branch mounting; for QMQB R-style panelboard switches)	C	S208, S209, S215 distributor
Current rating	200 A, 600 V; single branch mounting; for QMQB R-style panelboard switches	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00026	KFDP-5C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link kit (QMQB4036R into BDP switchgear)

OEM part number	KFDP-5C	C	S208 distributor
Description	FPE FDP link kit (QMQB4036R into BDP switchgear)	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S208 inference
Breaker compatibility	'QMQB4036R INTO BDP SWITCHGEAR' (relectric) - i.e., QMQB 400 A 600 V switch mounted in BDP	C	S208 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP, BDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00019	KFDP66C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP66C for QMQB switch units

OEM part number	KFDP66C	C	S209 distributor
Description	FPE FDP link/strap kit KFDP66C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S209 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (600 A, 600 V)	C	S209 distributor
Current rating	600 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00020	KFDP7C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP7C for QMQB switch units

OEM part number	KFDP7C	C	S209 distributor
Description	FPE FDP link/strap kit KFDP7C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S209 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (1200 A, 600 V)	C	S209 distributor
Current rating	1200 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00021	KFDPD16C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPD16C for QMQB switch units

OEM part number	KFDPD16C	C	S209 distributor
Description	FPE FDP link/strap kit KFDPD16C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S209 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (100 A, 600 V)	C	S209 distributor
Current rating	100 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00023	KFDPD26C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPD26C for QMQB switch units

OEM part number	KFDPD26C	C	S209 distributor
Description	FPE FDP link/strap kit KFDPD26C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S209 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards	C	S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00022	KFDPS16C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPS16C for QMQB switch units

OEM part number	KFDPS16C	C	S209, S208 distributor
Description	FPE FDP link/strap kit KFDPS16C for QMQB switch units	C	S209 distributor
	FPE FDP link kit for QMQB (relectric listing)	C	S208 distributor
Application	branch	C	S209, S208 distributor
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S209 inference
	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S208 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (100 A, 600 V)	C	S209 distributor
	QMQB	C	S208 distributor
Current rating	100 A, 600 V	C	S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S209, S208 distributor
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		
Open question	*Same as KFDPS16C?*		

EDH-FPE-00024	KFDPS26C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPS26C for QMQB switch units

OEM part number	KFDPS26C	C	S209 distributor
Description	FPE FDP link/strap kit KFDPS26C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S209 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards	C	S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00025	KFDPV7C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPV7C for QMQB switch units

OEM part number	KFDPV7C	C	S209 distributor
Description	FPE FDP link/strap kit KFDPV7C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S209 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (1200 A, 600 V)	C	S209 distributor
Current rating	1200 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00027	KQB3C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB3C

OEM part number	KQB3C	C	S208, S209 distributor
Description	FPE QMQB switch strap/link kit KQB3C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S208, S209 inference
Breaker compatibility	15-100 A, 600 V, dual/twin branch mounting, panelboard switch strap kit; relectric 'QMQB LINK KIT; 60A' (KQB3C) vs 'QMQB LINK KIT; 200A' (KQB-3C) - conflicting	C	S208, S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00029	KQB46C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB46C

OEM part number	KQB46C	C	S208, S209 distributor
Description	FPE QMQB switch strap/link kit KQB46C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S208, S209 inference
Breaker compatibility	QMQB link kit	C	S208, S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00028	KQB4C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB4C

OEM part number	KQB4C	C	S208, S209 distributor
Description	FPE QMQB switch strap/link kit KQB4C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S208, S209 inference
Breaker compatibility	QMQB link kit; 200 A (relectric KQB-4C)	C	S208, S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00030	KQB66C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB66C

OEM part number	KQB66C	C	S209 distributor
Description	FPE QMQB switch strap/link kit KQB66C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S209 inference
Breaker compatibility	QMQB strap kit	C	S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00031	KQB86C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB86C

OEM part number	KQB86C	C	S209 distributor
Description	FPE QMQB switch strap/link kit KQB86C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S209 inference
Breaker compatibility	700-800 A, 600 V QMQB panel board switch strap kit	C	S209 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00032	KQB-D26C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB-D26C

OEM part number	KQB-D26C	C	S208 distributor
Description	FPE QMQB switch strap/link kit KQB-D26C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S208 inference
Breaker compatibility	QMQB strap kit	C	S208 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00033	PK103T	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit PK103T

OEM part number	PK103T	C	S208 distributor
Description	FPE QMQB switch strap/link kit PK103T	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S208 inference
Breaker compatibility	QMQB strap kit	C	S208 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

7.4 NA1B — FPE NA1B / NH1B lighting and appliance panelboards

FAM-FPE-005 · panelboard · aka NA-type panel, NAB, NAIB, NH-type panel, NH1B, NHB, NHIB · markings: Federal Noark, Federal Pacific, Stab-Lok

NA1B ('NAIB') and NH1B ('NHIB') are FPE lighting/appliance panelboard types. A used kit KCDP-1A is labelled 'For NE/NEF frame circuit breakers, for NH1B/NA1B type panels, for (2) 3 pole breakers'. relectric lists NAIB-NEF 'NE/NEF twin kit for NA1B panel' and Superbreakers lists KNA1B1C lug kit. fpeparts.com lists 'NAIB panel board kit' and 'NHIB panel board kit'. By analogy with FPE breaker naming (NA=Stab-Lok 120/240 plug-in; NE/NEF=bolt-on 240/480 V) NA1B is likely the 120/240 or 208Y/120 panel and NH1B the 480Y/277 panel, but this is unverified.

Attribute	Value	Cl.	Sources
Status	Obsolete	C	S210, S208, S212 surplus
Branch breakers accepted	Stab-Lok NA/NB branch breakers (assumed for NA1B); NE/NEF twin-mounted feeders/mains via KCDP-1A / NAIB-NEF kit	D	S210, S208 Branch breaker type for NH1B (probably NE/NEF bolt-on, 480Y/277V) not confirmed; inference

Breaker families associated: NA / NC (Stab-Lok plug-in), NE / NEF / NEG / HEF / HEG (N-frame 100 A class)
Key documents: S208 Federal Pacific Breaker Parts & Accessories Catalog; S209 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S210 Federal Pacific KCDP-1A Kit (for NH/NA-Type Panel, NE/NEF Frame); S212 Federal Pacific Electric panelboard connector kits

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00034	**KNA1B1C**	FPE NA1B panelboard lug kit	—	discontinued

EDH-FPE-00034	KNA1B1C	Federal Pacific Electric	main-lug-kit	DISCONTINUED

FPE NA1B panelboard lug kit

OEM part number	KNA1B1C	C	S209 distributor
Description	Lug kit (Superbreakers: 'used for molded case circuit breaker'); tagged Lugs; numbering suggests NA1B panel kit	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: NA1B		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values, wire range		
Open question	*Is KNA1B1C a main lug kit for NA1B panels or a breaker lug kit?*		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00006	**KCDP-1A**	FPE twin mounting kit for NE/NEF frames in NA1B/NH1B panels	(2) 3-pole NE/NEF frame breakers in NH1B / NA1B type panels (label) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00014	**NAIB-NEF**	FPE NE/NEF twin kit for NA1B panel	NE/NEF twin kit for NA1B panel C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00006	KCDP-1A	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE twin mounting kit for NE/NEF frames in NA1B/NH1B panels

OEM part number	KCDP-1A	C	S210 distributor
Description	FPE twin mounting kit for NE/NEF frames in NA1B/NH1B panels	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S210 inference
Breaker compatibility	(2) 3-pole NE/NEF frame breakers in NH1B / NA1B type panels (label)	C	S210 distributor
Dimensions	Shipping package 4 x 3 x 3 in, 1 lb (listing; not part dimensions)	C	S210 surplus
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S210 distributor
Identification features	Label text includes 'J25 (HM1)' and 'LA25037' (meaning unknown)	C	S210 surplus
Cross-links	Families: NA1B · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is KCDP-1A an earlier revision of KCDP1C or a distinct NA1B/NH1B kit? Same as relectric NAIB-NEF?*		

EDH-FPE-00014	NAIB-NEF	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE NE/NEF twin kit for NA1B panel

OEM part number	NAIB-NEF	C	S208 distributor
Description	FPE NE/NEF twin kit for NA1B panel	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S208 inference
Breaker compatibility	NE/NEF twin kit for NA1B panel	C	S208 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: NA1B · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Same item as KCDP-1A?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00042	**NCFS**	FPE filler plate for thin NC breaker space	—	unknown

EDH-FPE-00042	NCFS	Federal Pacific Electric	filler-plate	STATUS UNKNOWN

FPE filler plate for thin NC breaker space

OEM part number	NCFS	C	S209 distributor
Description	Load center filler plate used for thin type NC circuit breaker	C	same as above
Cross-links	Families: NA1B · Breakers: NA / NC (Stab-Lok plug-in)		
Not yet documented	Dimensions, Material		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00041	**1LOK**	FPE handle lock for 1-pole NA/NB breakers	—	available as new (listing)

EDH-FPE-00041	1LOK	Federal Pacific Electric	handle-lock	AVAILABLE AS NEW (LIST

FPE handle lock for 1-pole NA/NB breakers

OEM part number	1LOK	C	S209 distributor
Description	Handle lock 15-50 A for 1-pole NA and NB circuit breakers	C	same as above
Status	available as new (listing)	C	same as above
Cross-links	Families: NA1B, NBLP · Breakers: NA / NC (Stab-Lok plug-in), NB (Stab-Lok bolt-on)		
Not yet documented	Dimensions, Material		

7.5 NBLP — FPE NBLP / NQLP bolt-on lighting panelboards

FAM-FPE-006 · panelboard · aka NQLP, NB panelboard · markings: Federal Pacific, Federal Pioneer (Canada)

NBLP panelboards take NB-type bolt-on Stab-Lok-style breakers (Schneider FAQ snippet; Superbreakers NB100 'installs into Federal Pacific NB and NBLP panelboards'). NQ breakers are described as fitting NBLP and NQLP panelboards. Federal Pioneer (Canadian FPE subsidiary, sold to Schneider Canada in 1988) used the same Stab-Lok NB/NBLP nomenclature; that lineage is coded SQD in this catalogue.

Attribute	Value	Cl.	Sources
Status	Obsolete; Schneider Electric states it no longer offers replacement breakers for Federal Pacific switchboards/panelboards	C	S217, S209 Schneider statement from search snippet only (page blocked); oem_web
Branch breakers accepted	NB bolt-on miniature breakers (NBLP); NQ breakers (NQLP, e.g., NQ111050)	C	S209, S217 distributor

Breaker families associated: NB (Stab-Lok bolt-on)
Key documents: S209 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S214 Federal Pacific Electric Corporation; S217 Schneider Electric FAQ: replacement breakers for Federal Pacific switchboards/panelboards;
Also fits this family (entry printed elsewhere): 1LOK

7.6 NDP — FPE NDP panelboard

FAM-FPE-004 · panelboard · aka NHDP (related?) · markings: Federal Pacific

NDP is an FPE panelboard type supported by twin mounting strap kits NDPNE and NDPNEJ (relectric). fpeparts.com also lists 'NHDP panel board kit' and 'LDP panel board kit' families; relationship of NDP/NHDP/LDP to CDP/BDP not documented.

Attribute	Value	Cl.	Sources
Status	Obsolete	C	S208, S211 surplus
Branch breakers accepted	NE/NEF and NEJ/NEJH/HEJ twin-mounted with strap kits NDPNE, NDPNEJ	C	same as above

Breaker families associated: NE / NEF / NEG / HEF / HEG (N-frame 100 A class), NEJ / NEJH / HEJ (N-frame 225 A class)
Key documents: S208 Federal Pacific Breaker Parts & Accessories Catalog; S211 NDPNEJ mounting hardware strap kit detail; S212 Federal Pacific Electric panelboard connector kits

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00013	**NDPNE**	FPE NDP twin mounting strap kit, NE/NEF	NE frame breakers, dual/twin branch mounting (relectric description du C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00012	**NDPNEJ**	FPE NDP twin mounting strap kit, NEJ/NEJH/HEJ	NEJ, NEJH, HEJ frames, dual/twin branch mounting C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00013	NDPNE	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE NDP twin mounting strap kit, NE/NEF

OEM part number	NDPNE	C	S208 distributor
Description	FPE NDP twin mounting strap kit, NE/NEF	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S208 inference
Breaker compatibility	NE frame breakers, dual/twin branch mounting (relectric description duplicates NEJ text)	C	S208 distributor
Current rating	100 A / 240 V per search snippet of relectric NDPNE page	D	S208 surplus
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S208 distributor
Cross-links	Families: NDP · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00012	NDPNEJ	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE NDP twin mounting strap kit, NEJ/NEJH/HEJ

OEM part number	NDPNEJ	C	S208, S211 distributor
Description	FPE NDP twin mounting strap kit, NEJ/NEJH/HEJ	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S208, S211 inference
Breaker compatibility	NEJ, NEJH, HEJ frames, dual/twin branch mounting	C	S208, S211 distributor
Voltage rating	600 V max	C	S211 surplus
Current rating	225 A max	C	same as above
Material	copper	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S208, S211 distributor
Cross-links	Families: NDP · Breakers: NEJ / NEJH / HEJ (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*relectric spec table lists Panel Type 'CDP' for NDPNEJ while description says NDP - clarify.*		

7.7 FPE-SWBD — FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)

FAM-FPE-007 · switchboard · aka Federal Pacific switchgear, Fusematic, HCB, VCB · markings: American, FPE, Federal Pacific

FPE switchboards used N-frame bolt-on breakers (NJL 'designed for direct installation into legacy Federal Pacific switchboards and panelboards that accept N-frame bolt-on breakers'), larger NM (400-800 A with trip units NM031400/500/600/800, lugs NM34/NM36/NM38) and NP frames (to 1600 A), and the Fusematic line (XF breakers, XJL current limiters). Group-mounting hardware for switchboards not identified beyond the panelboard KCDP/KBDP kits.

Evidence record: 1962 FPE advertisement - 600 V AC switchboards types HCB (main distributor sections through 2000 A, small buildings) and VCB (through 6000 A, medium-to-large buildings); branch rotary-handle breakers through 800 A.

Attribute	Value	Cl.	Sources
Status	Obsolete; recertified NJL/NJJ/NM/NP breakers and NN switches sold for legacy FPE switchboards	C	S209, S208 distributor
Main ampacity	HCB through 2000 A; VCB through 6000 A	A	S455 oem_spec
Branch breakers accepted	NJL/HJL, NJJ, NM/HM (trip units NM03xxxx), NN switches, NP (to 1600 A); Fusematic X-frame XF/XJL current-limiting units	C	S209, S208 distributor

Breaker families associated: Fusematic XF / XM / XKL / XJL, NJL / HJL / NJ / NJJ (N-frame 400 A class), NM / HM / NN / NP / NK (large N-frames)
Key documents: S208 Federal Pacific Breaker Parts & Accessories Catalog; S209 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S455 sim_ecm_1962-05_61_5 Electrical Construction and Maintenance, Vol 61 No 5, May 1962 - Federal Pacific Electric

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00038	**N32**	Lug kit for NN breaker	—	discontinued
EDH-FPE-00035	**NM34**	Lug for FPE type NM breaker, (1) #1/0-600 kcmil, 125-300 A	—	discontinued
EDH-FPE-00036	**NM36**	Lug for FPE type NM breaker, (2) 3/0-600 kcmil, 350-600 A	—	discontinued
EDH-FPE-00037	**NM38**	Lug for FPE type NM breaker, (3) 250-500 kcmil, 700-800 A	—	discontinued

EDH-FPE-00038 **N32** Federal Pacific Electric lug-kit **DISCONTINUED**

Lug kit for NN breaker

OEM part number	N32	C	S208 surplus
Description	Lug kit for NN breaker	C	same as above
Application	breaker terminal lugs	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: FPE-SWBD, CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material, Torque values		

EDH-FPE-00035 **NM34** Federal Pacific Electric lug-kit **DISCONTINUED**

Lug for FPE type NM breaker, (1) #1/0-600 kcmil, 125-300 A

OEM part number	NM34	C	S208 surplus
Description	Lug for FPE type NM breaker, (1) #1/0-600 kcmil, 125-300 A	C	same as above
Application	breaker terminal lugs	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: FPE-SWBD, CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material, Torque values		

EDH-FPE-00036 **NM36** Federal Pacific Electric lug-kit **DISCONTINUED**

Lug for FPE type NM breaker, (2) 3/0-600 kcmil, 350-600 A

OEM part number	NM36	C	S208 surplus
Description	Lug for FPE type NM breaker, (2) 3/0-600 kcmil, 350-600 A	C	same as above
Application	breaker terminal lugs	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: FPE-SWBD, CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material, Torque values		

EDH-FPE-00037 **NM38** Federal Pacific Electric lug-kit **DISCONTINUED**

Lug for FPE type NM breaker, (3) 250-500 kcmil, 700-800 A

OEM part number	NM38	C	S208 surplus
Description	Lug for FPE type NM breaker, (3) 250-500 kcmil, 700-800 A	C	same as above
Application	breaker terminal lugs	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: FPE-SWBD, CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00039	**RP211002**	FPE handle extension for NM 800/1000 A breakers	—	unknown
EDH-FPE-00040	**RP212001**	FPE handle kit for NP frame	—	unknown

EDH-FPE-00039	RP211002	Federal Pacific Electric	breaker-accessory	STATUS UNKNOWN

FPE handle extension for NM 800/1000 A breakers

OEM part number	RP211002	C	S209 distributor
Description	Circuit breaker handle extension used for NM 800 A and 1000 A breakers	C	same as above
Cross-links	Families: FPE-SWBD · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material		

EDH-FPE-00040	RP212001	Federal Pacific Electric	breaker-accessory	STATUS UNKNOWN

FPE handle kit for NP frame

OEM part number	RP212001	C	S209 distributor
Description	Handle kit used for NP frame molded case circuit breaker	C	same as above
Cross-links	Families: FPE-SWBD · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material		

8 Zinsco / Sylvania

Lineage / brand markings: Zinsco, GTE-Sylvania

Family	Type	Status	Era	Entries	Pg
ZIN-DIST Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	panelboard	Obsolete; recertified QSF switches and DSL*/QSF* mounting kits traded	—	21	1871
ZIN-Q Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	panelboard	Obsolete; Connecticut Electric (UBI) makes UBIZ replacement breakers and UBIZRBK12 tin/copper replacement bus kit	Zinsco Electric (Los Angeles) from 1943; Magnatrip breakers patented 1950; copper bus until early 1960s then aluminum; GTE-Sylvania from 1973; renamed Challenger 1978; new Zinsco-frame panels ended c.1981 with Challenger 200 A panels using Zinsco-frame mains 1982-1994; T&B made breakers from Zinsco molds until 2005	4	1876

8.1 ZIN-DIST — Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)

FAM-ZIN-002 · panelboard · aka QSF panelboard, Sylvania S-line panelboard, double slot, single slot split buss · markings: Zinsco, Sylvania, GTE Sylvania

Zinsco/Sylvania commercial distribution panelboards used two bus/kit styles: 'Double Slot' (Zinsco kits QSF100DS-QSF600DS and DSL* breaker kits) and 'Single Slot ... Split Buss' (Sylvania QSF100SB/200SB/400SB). DSL kits exist for FPE frames (DSLNET, DSLNEJT, DSLNFT, DSLNJT, DSLNM) supporting a forum report that FPE breakers were used in Zinsco/Sylvania equipment above 240 V; Sylvania also lists FPENEFT 'twin mounting hardware for NEF breaker'. Sylvania-branded SEH/SF/SJK bolt-on breakers are sold as fitting Sylvania, Challenger and Zinsco panelboards.

Attribute	Value	Cl.	Sources
Status	Obsolete; recertified QSF switches and DSL*/QSF* mounting kits traded	C	S232, S233, S221 surplus
Voltage rating	240 V (QSF..33) and 600 V (QSF..53) switch units	C	S221, S242 distributor
Branch breakers accepted	QSF fusible switches 30-600 A (T-prefix = twin); bolt-on breakers QB, QFB; FPE N-frame breakers NE/NEF, NEJ, NF, NJ, NM in 'DSL' double-slot kits; Sylvania SE/SEH/SC?/SJD/SKM breakers	C	S232, S233, S221 surplus

Breaker families associated: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM), Zinsco / Sylvania QSF fusible panelboard switch, Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)

Key documents: S221 Superbreakers Zinsco + Sylvania collections (Shopify products.json); S232 Zinsco Breaker Parts & Accessories Catalog; S233 Sylvania Breaker Parts & Accessories Catalog; S242 Midwest Switchgear: Zinsco/Sylvania QSF fusible panelboard switch listings (QSFT1033B, QSF

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00008	**DSLNEJT**	Zinsco double slot twin mounting hardware, NEJ type	—	discontinued; recertified/new-surplus
EDH-ZIN-00007	**DSLNET**	Zinsco double slot twin mounting hardware for FPE NE breakers (inferred from name)	—	discontinued; recertified/new-surplus
EDH-ZIN-00009	**DSLNFT**	Zinsco double slot twin mounting hardware for FPE NF/NFJ (inferred from name)	—	discontinued; recertified/new-surplus
EDH-ZIN-00010	**DSLNJT**	Zinsco double slot twin mounting hardware for FPE NJ/NJL (inferred from name)	—	discontinued; recertified/new-surplus
EDH-ZIN-00011	**DSLNM**	Zinsco double slot mounting hardware for FPE NM (inferred from name)	—	discontinued; recertified/new-surplus
EDH-ZIN-00012	**DSLNMS**	Zinsco DSLNM mounting hardware (single?)	—	discontinued; recertified/new-surplus
EDH-ZIN-00005	**DSLQB**	Zinsco double slot breaker mounting hardware for QB	—	discontinued; recertified/new-surplus
EDH-ZIN-00006	**DSLQFB**	Zinsco double slot breaker mounting hardware for QFB	—	discontinued; recertified/new-surplus
EDH-ZIN-00021	**FPENEFT**	Sylvania twin mounting hardware for FPE NEF breaker	—	discontinued; recertified/new-surplus

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00001	**QSF100DS**	Zinsco QSF switch kit 100 A, double slot, mounting hardware	—	discontinued; recertified/new-surplus
EDH-ZIN-00014	**QSF100SB**	Sylvania QSF single slot switch kit, split buss, 100 A	—	discontinued; recertified/new-surplus
EDH-ZIN-00013	**QSF100SS**	Sylvania QSF 100 A twin kit	—	discontinued; recertified/new-surplus
EDH-ZIN-00002	**QSF200DS**	Zinsco QSF 200 A double slot mounting hardware	—	discontinued; recertified/new-surplus
EDH-ZIN-00015	**QSF200SB**	Sylvania QSF single slot switch kit, split buss, 200 A	—	discontinued; recertified/new-surplus
EDH-ZIN-00003	**QSF400DS**	Zinsco/Sylvania QSF 400 A switch kit, double slot	—	discontinued; recertified/new-surplus
EDH-ZIN-00016	**QSF400SB**	Sylvania QSF single slot switch kit, split buss (listed 200 A; number implies 400 A)	—	discontinued; recertified/new-surplus
EDH-ZIN-00004	**QSF600DS**	Zinsco QSF 600 A double slot mounting hardware	—	discontinued; recertified/new-surplus
EDH-ZIN-00018	**SECT**	Sylvania 225 A twin kit (for SC? frame, inferred)	—	discontinued; recertified/new-surplus
EDH-ZIN-00017	**SEHT**	Sylvania 100 A twin kit (for SE/SEH breakers, inferred)	—	discontinued; recertified/new-surplus
EDH-ZIN-00019	**SJD4T**	Sylvania 400 A twin kit (SJD frame)	—	discontinued; recertified/new-surplus
EDH-ZIN-00020	**SKM8S**	Sylvania 800 A single kit (SKM frame)	—	discontinued; recertified/new-surplus

EDH-ZIN-00008 **DSLNEJT** Zinsco / Sylvania branch-connector-kit **DISCONTINUED; RECERTIF**

Zinsco double slot twin mounting hardware, NEJ type

OEM part number	DSLNEJT	C	S232 surplus
Description	Zinsco double slot twin mounting hardware, NEJ type	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NEJ / NEJH / HEJ (N-frame 225 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00007 **DSLNET** Zinsco / Sylvania branch-connector-kit **DISCONTINUED; RECERTIF**

Zinsco double slot twin mounting hardware for FPE NE breakers (inferred from name)

OEM part number	DSLNET	C	S232 surplus
Description	Zinsco double slot twin mounting hardware for FPE NE breakers (inferred from name)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Confirm frame (NE/NEF) - description only repeats part number*		

EDH-ZIN-00009 **DSLNFT** Zinsco / Sylvania branch-connector-kit **DISCONTINUED; RECERTIF**

Zinsco double slot twin mounting hardware for FPE NF/NFJ (inferred from name)

OEM part number	DSLNFT	C	S232 surplus
Description	Zinsco double slot twin mounting hardware for FPE NF/NFJ (inferred from name)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00010	DSLNJT	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco double slot twin mounting hardware for FPE NJ/NJL (inferred from name)

OEM part number	DSLNJT	C	S232 surplus
Description	Zinsco double slot twin mounting hardware for FPE NJ/NJL (inferred from name)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NJL / HJL / NJ / NJJ (N-frame 400 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00011	DSLNM	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco double slot mounting hardware for FPE NM (inferred from name)

OEM part number	DSLNM	C	S232 surplus
Description	Zinsco double slot mounting hardware for FPE NM (inferred from name)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00012	DSLNMS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco DSLNM mounting hardware (single?)

OEM part number	DSLNMS	C	S232 surplus
Description	Zinsco DSLNM mounting hardware (single?)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Difference between DSLNM and DSLNMS (S=single?)*		

EDH-ZIN-00005	DSLQB	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco double slot breaker mounting hardware for QB

OEM part number	DSLQB	C	S232 surplus
Description	Zinsco double slot breaker mounting hardware for QB	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00006	DSLQFB	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco double slot breaker mounting hardware for QFB

OEM part number	DSLQFB	C	S232 surplus
Description	Zinsco double slot breaker mounting hardware for QFB	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00021	FPENEFT	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania twin mounting hardware for FPE NEF breaker

OEM part number	FPENEFT	C	S233 surplus
Description	Sylvania twin mounting hardware for FPE NEF breaker	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00001	QSF100DS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco QSF switch kit 100 A, double slot, mounting hardware

OEM part number	QSF100DS	C	S232 surplus
Description	Zinsco QSF switch kit 100 A, double slot, mounting hardware	C	same as above
Application	branch (QSF fusible switch)	C	same as above
Current rating	100 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00014	QSF100SB	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania QSF single slot switch kit, split buss, 100 A

OEM part number	QSF100SB	C	S233 surplus
Description	Sylvania QSF single slot switch kit, split buss, 100 A	C	same as above
Current rating	100 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00013	QSF100SS	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania QSF 100 A twin kit

OEM part number	QSF100SS	C	S233 surplus
Description	Sylvania QSF 100 A twin kit	C	same as above
Current rating	100 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00002	QSF200DS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco QSF 200 A double slot mounting hardware

OEM part number	QSF200DS	C	S232 surplus
Description	Zinsco QSF 200 A double slot mounting hardware	C	same as above
Current rating	200 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00015	QSF200SB	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania QSF single slot switch kit, split buss, 200 A

OEM part number	QSF200SB	C	S233 surplus
Description	Sylvania QSF single slot switch kit, split buss, 200 A	C	same as above
Current rating	200 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00003	QSF400DS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco/Sylvania QSF 400 A switch kit, double slot

OEM part number	QSF400DS	C	S232, S233 surplus
Description	Zinsco/Sylvania QSF 400 A switch kit, double slot	C	same as above
Current rating	400 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00016	QSF400SB	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania QSF single slot switch kit, split buss (listed 200 A; number implies 400 A)

OEM part number	QSF400SB	C	S233 surplus
Description	Sylvania QSF single slot switch kit, split buss (listed 200 A; number implies 400 A)	C	same as above
Current rating	listed '200A' - probably 400 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Ampacity conflict 200 vs 400 A*		

EDH-ZIN-00004	QSF600DS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco QSF 600 A double slot mounting hardware

OEM part number	QSF600DS	C	S232 surplus
Description	Zinsco QSF 600 A double slot mounting hardware	C	same as above
Current rating	600 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00018	SECT	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania 225 A twin kit (for SC? frame, inferred)

OEM part number	SECT	C	S233 surplus
Description	Sylvania 225 A twin kit (for SC? frame, inferred)	C	same as above
Current rating	225 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00017	SEHT	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania 100 A twin kit (for SE/SEH breakers, inferred)

OEM part number	SEHT	C	S233 surplus
Description	Sylvania 100 A twin kit (for SE/SEH breakers, inferred)	C	same as above
Current rating	100 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00019	SJD4T	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania 400 A twin kit (SJD frame)

OEM part number	SJD4T	C	S233 surplus
Description	Sylvania 400 A twin kit (SJD frame)	C	same as above
Current rating	400 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00020	SKM8S	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania 800 A single kit (SKM frame)

OEM part number	SKM8S	C	S233, S243 surplus
Description	Sylvania 800 A single kit (SKM frame)	C	same as above
Current rating	800 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

8.2 ZIN-Q — Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)

FAM-ZIN-001 · panelboard · aka ML12, MLB20, MOB20, MT12MBB, MTMB20, Magnatrip, Q-frame · markings: Challenger (Zinsco-frame), GTE Sylvania Zinsco, GTE-Sylvania, Kearney (look-alike), Magnatrip, Sylvania, Zinsco

Zinsco (and Sylvania-labelled) panels use breakers with deep slots that clip onto flat on-edge bus bars; plug-in Q/QC/R38 branch breakers and QFP/QFL/QFB main breakers. Commercial versions with 3-phase 240 V and bolt-on QB/QCB breakers exist (QB243040 'for obsolete Zinsco commercial and industrial panelboards'). Known failure mode: loosened breaker-bus contact on aluminium bus causing arcing/fusing. Aftermarket: Connecticut Electric UBIZ breakers (10 kAIC) and UBIZRBK12 125 A replacement bus kit.

Attribute	Value	Cl.	Sources
Status	Obsolete; Connecticut Electric (UBI) makes UBIZ replacement breakers and UBIZRBK12 tin/copper replacement bus kit	C	S219, S222, S223 distributor
Era of manufacture	Zinsco Electric (Los Angeles) from 1943; Magnatrip breakers patented 1950; copper bus until early 1960s then aluminum; GTE-Sylvania from 1973; renamed Challenger 1978; new Zinsco-frame panels ended c.1981 with Challenger 200 A panels using Zinsco-frame mains 1982-1994; T&B made breakers from Zinsco molds until 2005	C	S219 Wikipedia; largely uncited, cites InterNACHI 2007 history; other
Successor	No OEM successor (tooling: GTE-Sylvania -> Challenger -> Westinghouse/Eaton; Zinsco breaker molds to Thomas & Betts, closed 2005). Aftermarket: Connecticut Electric/UBI.	C	S219, S224 other
Voltage rating	120/240 V 1-ph and 240 V 3-ph (Q24/QFP24 3-pole mains)	C	S220, S221 distributor
Main ampacity	to 225 A (e.g., MLB20(..)C 225 A max; main lug blocks LK-15 150 A and LK-22 225 A)	C	S220 other

Attribute	Value	Cl.	Sources
Branch breakers accepted	Q, QC, QCN, Q24, R38/RC38 twin, HRGF; bolt-on QB/QCB; mains QFP/QFL/QFB/QFBL	C	S220, S221 distributor

Breaker families associated: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC), Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)
Key documents: S219 Zinsco; S220 GTE Sylvania Zinsco breaker & panel identification; S221 Superbreakers Zinsco + Sylvania collections (Shopify products.json); S222 Zinsco 125-Amp Type RBK UBI Replacement Buss Bar Kit for Zinsco Load Centers UBIZRBK12; S223 Connecticut Electric UBIZ / UBIF / UBIP replacement breaker listings; S224 Challenger / GTE / Zinsco ownership discussion

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00022	**QFP2T**	Zinsco QFP 2-pole main breaker mounting hardware / feet (base)	2-pole QFP mains with offset/staggered lug or standard lug; listed for C	discontinued; recertified/new-surplus

EDH-ZIN-00022 **QFP2T** Zinsco / Sylvania main-breaker-kit **DISCONTINUED; RECERTIF**

Zinsco QFP 2-pole main breaker mounting hardware / feet (base)

OEM part number	QFP2T	C	S235 surplus
Description	Zinsco QFP 2-pole main breaker mounting hardware / feet (base)	C	same as above
Installation location	Under main breaker, mounting it to panel	C	same as above
Breaker compatibility	2-pole QFP mains with offset/staggered lug or standard lug; listed for Zinsco, Sylvania, Westinghouse, Challenger panels	C	same as above
Dimensions	Listing package dims 4.25 x 4.5 x 1.125 in, 0.1 lb (may be item size)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-Q · Breakers: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)		
Not yet documented	Current rating, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00023	**LK-15**	Zinsco main lug block 150 A	—	unknown
EDH-ZIN-00024	**LK-22**	Zinsco main lug block 225 A	—	unknown

EDH-ZIN-00023 **LK-15** Zinsco / Sylvania main-lug-kit **STATUS UNKNOWN**

Zinsco main lug block 150 A

OEM part number	LK-15	C	S220 reader-submitted panel label; photo
Description	Main lug block rated 150 A listed on Zinsco panel label alongside QFP24 main	C	S220 photo
Current rating	150 A	C	same as above
Cross-links	Families: ZIN-Q		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values, wire range		

EDH-ZIN-00024 **LK-22** Zinsco / Sylvania main-lug-kit **STATUS UNKNOWN**

Zinsco main lug block 225 A

OEM part number	LK-22	C	S220 reader-submitted panel label; photo
Description	Main lug block rated 225 A listed on Zinsco panel label alongside QFP24 main	C	S220 photo
Current rating	225 A	C	same as above
Cross-links	Families: ZIN-Q		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values, wire range		

Bus Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00025	**UBIZRBK12**	Connecticut Electric / UBI 125 A Type RBK replacement buss bar kit for Zinsco load centers	For Zinsco Type Q or Type R load centers (UBIZ breakers sold separatel C	current (aftermarket)

EDH-ZIN-00025	UBIZRBK12	Connecticut Electric / UBI	bus-assembly	CURRENT (AFTERMARKET)

Connecticut Electric / UBI 125 A Type RBK replacement buss bar kit for Zinsco load centers

OEM part number	UBIZRBK12 (aftermarket, Connecticut Electric)	C	S222 distributor
Description	Replacement buss bar kit: 2 copper-plated buss bars, lugs, screws, insulators; Wikipedia describes as tin-coated copper	C	S222, S219 distributor
Breaker compatibility	For Zinsco Type Q or Type R load centers (UBIZ breakers sold separately) (seller claim)	C	S222 distributor
Current rating	125 A	C	same as above
Kit contents	2 copper-plated buss bars, lugs, screws, insulators (retailer listing)	C	same as above
Status	current (aftermarket)	C	same as above
Aftermarket / reproduction	Aftermarket replacement - not Zinsco OEM; buyer review reports bars may need trimming to fit	C	same as above
	Aftermarket replacement bus kit by Connecticut Electric (UBI); retailer spec field reads 'Certification: UL Listed' and warranty 5 years; made in China. Customer reviews report bars a few inches too long (cut to fit) and UBIZ breakers sitting slightly longer than original Zinsco. (seller claim (listing field) + customer reviews; listing not verified with maker)	D	same as above
Cross-links	Families: ZIN-Q · Breakers: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)		
Not yet documented	Dimensions, listing basis, Torque values		
Open question	*Exact UL/ETL listing scope of UBIZRBK12 when installed in original Zinsco enclosures*		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00125	**UBIZ0220**	Connecticut Electric UBI replacement breaker UBIZ0220 (Zinsco RC Series - RC3820, 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00126	**UBIZ0230**	Connecticut Electric UBI replacement breaker UBIZ0230 (Zinsco RC Series - RC3830, 30 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00127	**UBIZ0240**	Connecticut Electric UBI replacement breaker UBIZ0240 (Zinsco RC Series - RC3840, 40 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00128	**UBIZ0250**	Connecticut Electric UBI replacement breaker UBIZ0250 (Zinsco RC Series - RC3850, 50 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00129	**UBIZ0260**	Connecticut Electric UBI replacement breaker UBIZ0260 (Zinsco RC Series - RC3860, 60 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00108	**UBIZ15**	Connecticut Electric UBI replacement breaker UBIZ15 (Zinsco Q Series - Q15, 15 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00121	**UBIZ1515**	Connecticut Electric UBI replacement breaker UBIZ1515 (Zinsco R Series - R3815, 15 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00122	**UBIZ1520**	Connecticut Electric UBI replacement breaker UBIZ1520 (Zinsco R Series - R381520, 15 & 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00109	**UBIZ20**	Connecticut Electric UBI replacement breaker UBIZ20 (Zinsco Q Series - Q20, 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00123	**UBIZ2020**	Connecticut Electric UBI replacement breaker UBIZ2020 (Zinsco R Series - R3820, 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00119	**UBIZ2100**	Connecticut Electric UBI replacement breaker UBIZ2100 (Zinsco QC Series - QCAL100, 100 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00120	**UBIZ2125**	Connecticut Electric UBI replacement breaker UBIZ2125 (Zinsco QC Series - QCAL125, 125 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00111	**UBIZ220**	Connecticut Electric UBI replacement breaker UBIZ220 (Zinsco QC Series - QC20, 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00112	**UBIZ230**	Connecticut Electric UBI replacement breaker UBIZ230 (Zinsco QC Series - QC30, 30 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00113	**UBIZ240**	Connecticut Electric UBI replacement breaker UBIZ240 (Zinsco QC Series - QC40, 40 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00114	**UBIZ250**	Connecticut Electric UBI replacement breaker UBIZ250 (Zinsco QC Series - QC50, 50 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00115	**UBIZ260**	Connecticut Electric UBI replacement breaker UBIZ260 (Zinsco QC Series - QCAL60, 60 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00116	**UBIZ270**	Connecticut Electric UBI replacement breaker UBIZ270 (Zinsco QC Series - QCAL70, 70 A)	—	current (sheet dated 2004 / Rev. 4/05)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00117	**UBIZ280**	Connecticut Electric UBI replacement breaker UBIZ280 (Zinsco QC Series - QCAL80, 80 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00118	**UBIZ290**	Connecticut Electric UBI replacement breaker UBIZ290 (Zinsco QC Series - QCAL90, 90 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00110	**UBIZ30**	Connecticut Electric UBI replacement breaker UBIZ30 (Zinsco Q Series - Q30, 30 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00124	**UBIZ3030**	Connecticut Electric UBI replacement breaker UBIZ3030 (Zinsco R Series - R3830, 30 A)	—	current (sheet dated 2004 / Rev. 4/05)

EDH-OTH-00125 — UBIZ0220

Connecticut Electric / UBI (Unique Breakers, Inc.) — other — **CURRENT (SHEET DATED 2**

Connecticut Electric UBI replacement breaker UBIZ0220 (Zinsco RC Series - RC3820, 20 A)

OEM part number	UBIZ0220 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	RC3820 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco RC Series - RC3820, 2-pole, 120/240 V, 20 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03033-1	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco RC Series - RC3820 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00126 — UBIZ0230

Connecticut Electric / UBI (Unique Breakers, Inc.) — other — **CURRENT (SHEET DATED 2**

Connecticut Electric UBI replacement breaker UBIZ0230 (Zinsco RC Series - RC3830, 30 A)

OEM part number	UBIZ0230 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	RC3830 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco RC Series - RC3830, 2-pole, 120/240 V, 30 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03034-8	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	30	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco RC Series - RC3830 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00127	UBIZ0240	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ0240 (Zinsco RC Series - RC3840, 40 A)

OEM part number	UBIZ0240 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	RC3840 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco RC Series - RC3840, 2-pole, 120/240 V, 40 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03035-5	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	40	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco RC Series - RC3840 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00128	UBIZ0250	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ0250 (Zinsco RC Series - RC3850, 50 A)

OEM part number	UBIZ0250 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	RC3850 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco RC Series - RC3850, 2-pole, 120/240 V, 50 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03036-2	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	50	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco RC Series - RC3850 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00129	UBIZ0260	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ0260 (Zinsco RC Series - RC3860, 60 A)

OEM part number	UBIZ0260 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	RC3860 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco RC Series - RC3860, 2-pole, 120/240 V, 60 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03037-9	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	60	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco RC Series - RC3860 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00108	UBIZ15	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ15 (Zinsco Q Series - Q15, 15 A)

OEM part number	UBIZ15 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	Q15 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco Q Series - Q15, 1-pole, 120 V, 15 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03038-6	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	15	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco Q Series - Q15 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00121	UBIZ1515	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ1515 (Zinsco R Series - R3815, 15 A)

OEM part number	UBIZ1515 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	R3815 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco R Series - R3815, two 1-pole-pole, 120 V, 15 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03030-0	C	same as above
Poles	two 1-pole	C	same as above
Voltage rating	120	C	same as above
Current rating	15	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco R Series - R3815 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00122	UBIZ1520	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ1520 (Zinsco R Series - R381520, 15 & 20 A)

OEM part number	UBIZ1520 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	R381520 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco R Series - R381520, two 1-pole-pole, 120 V, 15 & 20 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03028-7	C	same as above
Poles	two 1-pole	C	same as above
Voltage rating	120	C	same as above
Current rating	15 & 20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco R Series - R381520 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00109	UBIZ20	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ20 (Zinsco Q Series - Q20, 20 A)

OEM part number	UBIZ20 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	Q20 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco Q Series - Q20, 1-pole, 120 V, 20 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03039-3	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco Q Series - Q20 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00123	UBIZ2020	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ2020 (Zinsco R Series - R3820, 20 A)

OEM part number	UBIZ2020 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	R3820 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco R Series - R3820, two 1-pole-pole, 120 V, 20 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03031-7	C	same as above
Poles	two 1-pole	C	same as above
Voltage rating	120	C	same as above
Current rating	20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco R Series - R3820 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00119	UBIZ2100	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ2100 (Zinsco QC Series - QCAL100, 100 A)

OEM part number	UBIZ2100 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	QCAL100 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco QC Series - QCAL100, 2-pole, 120/240 V, 100 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03046-1	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	100	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco QC Series - QCAL100 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00120	UBIZ2125	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ2125 (Zinsco QC Series - QCAL125, 125 A)

OEM part number	UBIZ2125 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	QCAL125 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco QC Series - QCAL125, 2-pole, 120/240 V, 125 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03155-0	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	125	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco QC Series - QCAL125 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00111	UBIZ220	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ220 (Zinsco QC Series - QC20, 20 A)

OEM part number	UBIZ220 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	QC20 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco QC Series - QC20, 2-pole, 120/240 V, 20 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03041-6	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco QC Series - QC20 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00112	UBIZ230	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ230 (Zinsco QC Series - QC30, 30 A)

OEM part number	UBIZ230 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	QC30 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco QC Series - QC30, 2-pole, 120/240 V, 30 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03042-3	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	30	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco QC Series - QC30 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00113	UBIZ240	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ240 (Zinsco QC Series - QC40, 40 A)

OEM part number	UBIZ240 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	QC40 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco QC Series - QC40, 2-pole, 120/240 V, 40 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03043-0	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	40	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco QC Series - QC40 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00114	UBIZ250	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ250 (Zinsco QC Series - QC50, 50 A)

OEM part number	UBIZ250 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	QC50 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco QC Series - QC50, 2-pole, 120/240 V, 50 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03044-7	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	50	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco QC Series - QC50 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00115	UBIZ260	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ260 (Zinsco QC Series - QCAL60, 60 A)

OEM part number	UBIZ260 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	QCAL60 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco QC Series - QCAL60, 2-pole, 120/240 V, 60 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03045-4	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	60	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco QC Series - QCAL60 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00116	UBIZ270	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ270 (Zinsco QC Series - QCAL70, 70 A)

OEM part number	UBIZ270 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	QCAL70 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco QC Series - QCAL70, 2-pole, 120/240 V, 70 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03152-9	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	70	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco QC Series - QCAL70 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00117	UBIZ280	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ280 (Zinsco QC Series - QCAL80, 80 A)

OEM part number	UBIZ280 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	QCAL80 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco QC Series - QCAL80, 2-pole, 120/240 V, 80 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03153-6	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	80	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco QC Series - QCAL80 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00118	UBIZ290	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ290 (Zinsco QC Series - QCAL90, 90 A)

OEM part number	UBIZ290 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	QCAL90 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco QC Series - QCAL90, 2-pole, 120/240 V, 90 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-03154-3	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	90	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco QC Series - QCAL90 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00110	UBIZ30	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ30 (Zinsco Q Series - Q30, 30 A)

OEM part number	UBIZ30 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	Q30 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco Q Series - Q30, 1-pole, 120 V, 30 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03040-9	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	30	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco Q Series - Q30 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00124	UBIZ3030	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIZ3030 (Zinsco R Series - R3830, 30 A)

OEM part number	UBIZ3030 (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Alternate / superseded numbers	R3830 [equivalent] (seller cross-reference ('Corresponds to' column); Zinsco OEM catalog number)	C	same as above
Description	Connecticut Electric UBI replacement circuit breaker, Zinsco R Series - R3830, two 1-pole-pole, 120 V, 30 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-03032-4	C	same as above
Poles	two 1-pole	C	same as above
Voltage rating	120	C	same as above
Current rating	30	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: Zinsco R Series - R3830 (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Families: ZIN-Q · Breakers: Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC)		
Not yet documented	Dimensions, OEM instruction document, Material		

9 Other manufacturers

Lineage / brand markings: Other / unassigned

Family	Type	Status	Era	Entries	Pg
COMMANDER Commander / CEB panels (Zinsco-type)	loadcenter	Obsolete; an electrician quoted by InspectAPedia says older Commander and CEB panels are 'really the same panel' as Sylvania/GTE-Sylvania (Zinsco design); newer Commander 200 A mains mounted differently	—	0	1890
FA Frank Adam Electric panelboards	panelboard	Obsolete, rare	Company founded 1891 St. Louis; panels/breakers made through the 1950s (installed c.1900-1950, possibly to 1970); patents 1906-1965	1	1890
IEM-CDP Industrial Electric Mfg (IEM) CDP-type distribution panelboards / switchboard distribution sections	panelboard	unknown	—	8	1891
KINNEY Kinney panelboards	panelboard	Company reportedly still in Elgin IL; legacy breaker support possibly via Eaton vintage products (forum)	—	0	1893
WADSWORTH Wadsworth panelboards and breakers	panelboard	Obsolete; reconditioned/NOS Wadsworth A- and B-series breakers sold by surplus dealers; Connecticut Electric replacements mentioned	Common 1950s-1960s; forum claims no Wadsworth breakers made since c.1970 (unsourced)	0	1893

9.1 COMMANDER — Commander / CEB panels (Zinsco-type)

FAM-OTH-003 · loadcenter · aka CEB · markings: Commander, CEB

Commander panels are reported (opinion only) to be Zinsco/Sylvania-design panels sold under another label; manufacturer identity unconfirmed.

Attribute	Value	Cl.	Sources
Status	Obsolete; an electrician quoted by InspectAPedia says older Commander and CEB panels are 'really the same panel' as Sylvania/GTE-Sylvania (Zinsco design); newer Commander 200 A mains mounted differently	D	S220 other

Key documents: S220 GTE Sylvania Zinsco breaker & panel identification

9.2 FA — Frank Adam Electric panelboards

FAM-OTH-001 · panelboard · aka Frank Adams, FAM, PULFUZSW, KLAMPSWFUZ · markings: Frank Adam, Frank Adam Electric Co., FA

Frank Adam Electric Co. (St. Louis) made panelboards, fused switches and breakers from c.1900; its west-coast branch became Zinsco. Labels include PULFUZSW and KLAMPSWFUZ fused main panels and Fuselok switches. InspectAPedia reports some Frank Adam panelboards used Zinsco-type QSF units. A surplus 'FAM CU-NFJ hardware kit' suggests late Frank Adam panelboards accepted FPE NFJ breakers (unverified).

Attribute	Value	Cl.	Sources
Status	Obsolete, rare	C	S219, S225 other
Era of manufacture	Company founded 1891 St. Louis; panels/breakers made through the 1950s (installed c.1900-1950, possibly to 1970); patents 1906-1965	C	same as above
Successor	No known successor; West-coast business became Zinsmeyer Co. (1929/30s) -> Zinsco (1943)	C	same as above
Branch breakers accepted	Fused switches (Fuselok, PULFUZSW, KLAMPSWFUZ); Zinsco-type QSF units in some Frank Adam panelboards; FPE NFJ breakers via kit CU-NFJ (surplus listing)	C	S225, S236 other

Breaker families associated: Zinsco / Sylvania QSF fusible panelboard switch

Key documents: S219 Zinsco; S225 Frank Adam Electrical Panels; S236 Frank Adams Breaker Parts & Accessories Catalog

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00001	**CU-NFJ**	Frank Adam hardware kit CU-NFJ (copper, for NFJ breakers? - inferred)	—	discontinued; recertified/new-surplus

EDH-OTH-00001 **CU-NFJ** Frank Adam breaker-mounting-kit **DISCONTINUED; RECERTIF**

Frank Adam hardware kit CU-NFJ (copper, for NFJ breakers? - inferred)

OEM part number	CU-NFJ	C	S236 surplus
Description	Frank Adam hardware kit CU-NFJ (copper, for NFJ breakers? - inferred)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: FA · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

9.3 IEM-CDP — Industrial Electric Mfg (IEM) CDP-type distribution panelboards / switchboard distribution sections

FAM-OTH-005 · panelboard · aka IEM CDP, Industrial Electric Mfg CDP · markings: IEM, Industrial Electric Mfg Inc

Independent switchboard/panelboard builder (Industrial Electric Mfg Inc, IEM) whose 'CDP Type' distribution sections accept other manufacturers' molded-case breakers (GE TED/THED/SG/TJJ, Eaton ED/FD/KD) via IEM-made mounting hardware kits; kits resold (often reconditioned) by Relectric. Included here as a third-party (non-breaker-OEM) source of mounting hardware.

Attribute	Value	Cl.	Sources
Breaker compatibility	IEM CDP kit codes seen: CDPEDT (ED twin), CDPTEDT (TED twin), CDPTHEDT (THED twin), CDPSGS (SG 400 A single), CDPSGT (SG twin), CDPKDT (KD twin), CDPTJJS (TJJ single), CDPFDZBRACKET (Z bracket FD/HFD) (seller listing)	C	S631 distributor

Key documents: S631 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing page 20; Industria

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00135	**CDPEDT**	IEM CDP Type; ED Breaker; Twin; Mounting Hardware Kit	ED (twin) - breaker make not stated C	offered by Relectric; Relectric describes its reconditioned
EDH-OTH-00136	**CDPKDT**	IEM CDP Type; KD Breaker; Twin; Mounting Hardware Kit	KD (twin) - breaker make not stated C	offered by Relectric; Relectric describes its reconditioned
EDH-OTH-00137	**CDPSGS**	IEM CDP Type; SG Breaker; 400A; Single	GE Spectra SG 400 A (single) C	offered by Relectric; Relectric describes its reconditioned
EDH-OTH-00138	**CDPSGT**	IEM CDP Type; SG Breaker; Twin	GE Spectra SG (twin) C	offered by Relectric; Relectric describes its reconditioned
EDH-OTH-00133	**CDPTEDT**	IEM CDP Type; TED Breaker; Twin; Mounting Hardware Kit	GE TED (twin) C	offered by Relectric; Relectric describes its reconditioned
EDH-OTH-00134	**CDPTHEDT**	IEM CDP Type; THED Breaker; Twin; Mounting Hardware Kit	GE THED (twin) C	offered by Relectric; Relectric describes its reconditioned
EDH-OTH-00139	**CDPTJJS**	IEM CDP Type; TJJ Breaker; Single	GE TJJ (single) C	offered by Relectric; Relectric describes its reconditioned

EDH-OTH-00135 **CDPEDT** Industrial Electric Mfg Inc (IEM) breaker-mounting-kit **OFFERED BY RELECTRIC;**

IEM CDP Type; ED Breaker; Twin; Mounting Hardware Kit

OEM part number	CDPEDT (Relectric listing; some codes via search extracts of other listing pages)	C	S631 distributor
Description	CDP Type; ED Breaker; Twin; Mounting Hardware Kit	C	same as above
Breaker compatibility	ED (twin) - breaker make not stated (from listing title)	C	same as above
Status	offered by Relectric; Relectric describes its reconditioned items as tested and certified with 1-year warranty (item condition not stated individually)	D	same as above
Cross-links	Families: IEM-CDP		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material		

EDH-OTH-00136	CDPKDT	Industrial Electric Mfg Inc (IEM)	breaker-mounting-kit	OFFERED BY RELECTRIC;

IEM CDP Type; KD Breaker; Twin; Mounting Hardware Kit

OEM part number	CDPKDT (Relectric listing; some codes via search extracts of other listing pages)	C	S631 distributor
Description	CDP Type; KD Breaker; Twin; Mounting Hardware Kit	C	same as above
Breaker compatibility	KD (twin) - breaker make not stated (from listing title)	C	same as above
Status	offered by Relectric; Relectric describes its reconditioned items as tested and certified with 1-year warranty (item condition not stated individually)	D	same as above
Cross-links	Families: IEM-CDP		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material		

EDH-OTH-00137	CDPSGS	Industrial Electric Mfg Inc (IEM)	breaker-mounting-kit	OFFERED BY RELECTRIC;

IEM CDP Type; SG Breaker; 400A; Single

OEM part number	CDPSGS (Relectric listing; some codes via search extracts of other listing pages)	C	S631 distributor
Description	CDP Type; SG Breaker; 400A; Single	C	same as above
Breaker compatibility	GE Spectra SG 400 A (single) (from listing title)	C	same as above
Status	offered by Relectric; Relectric describes its reconditioned items as tested and certified with 1-year warranty (item condition not stated individually)	D	same as above
Cross-links	Families: IEM-CDP		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material		

EDH-OTH-00138	CDPSGT	Industrial Electric Mfg Inc (IEM)	breaker-mounting-kit	OFFERED BY RELECTRIC;

IEM CDP Type; SG Breaker; Twin

OEM part number	CDPSGT (Relectric listing; some codes via search extracts of other listing pages)	C	S631 distributor
Description	CDP Type; SG Breaker; Twin	C	same as above
Breaker compatibility	GE Spectra SG (twin) (from listing title)	C	same as above
Status	offered by Relectric; Relectric describes its reconditioned items as tested and certified with 1-year warranty (item condition not stated individually)	D	same as above
Cross-links	Families: IEM-CDP		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material		

EDH-OTH-00133	CDPTEDT	Industrial Electric Mfg Inc (IEM)	breaker-mounting-kit	OFFERED BY RELECTRIC;

IEM CDP Type; TED Breaker; Twin; Mounting Hardware Kit

OEM part number	CDPTEDT (Relectric listing; some codes via search extracts of other listing pages)	C	S631 distributor
Description	CDP Type; TED Breaker; Twin; Mounting Hardware Kit	C	same as above
Breaker compatibility	GE TED (twin) (from listing title)	C	same as above
Status	offered by Relectric; Relectric describes its reconditioned items as tested and certified with 1-year warranty (item condition not stated individually)	D	same as above
Cross-links	Families: IEM-CDP		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material		

EDH-OTH-00134	CDPTHEDT	Industrial Electric Mfg Inc (IEM)	breaker-mounting-kit	OFFERED BY RELECTRIC;

IEM CDP Type; THED Breaker; Twin; Mounting Hardware Kit

OEM part number	CDPTHEDT (Relectric listing; some codes via search extracts of other listing pages)	C	S631 distributor
Description	CDP Type; THED Breaker; Twin; Mounting Hardware Kit	C	same as above
Breaker compatibility	GE THED (twin) (from listing title)	C	same as above
Status	offered by Relectric; Relectric describes its reconditioned items as tested and certified with 1-year warranty (item condition not stated individually)	D	same as above
Cross-links	Families: IEM-CDP		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material		

EDH-OTH-00139	CDPTJJS	Industrial Electric Mfg Inc (IEM)	breaker-mounting-kit	OFFERED BY RELECTRIC;

IEM CDP Type; TJJ Breaker; Single

OEM part number	CDPTJJS (Relectric listing; some codes via search extracts of other listing pages)	C	S631 distributor
Description	CDP Type; TJJ Breaker; Single	C	same as above
Breaker compatibility	GE TJJ (single) (from listing title)	C	same as above
Status	offered by Relectric; Relectric describes its reconditioned items as tested and certified with 1-year warranty (item condition not stated individually)	D	same as above
Cross-links	Families: IEM-CDP		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00140	**CDPFDZBRACKET**	IEM IEM 'Z' Bracket for FD/HFD Breaker	FD/HFD C	offered by Relectric; Relectric describes its reconditioned

EDH-OTH-00140	CDPFDZBRACKET	Industrial Electric Mfg Inc (IEM)	mounting-bracket	OFFERED BY RELECTRIC;

IEM IEM 'Z' Bracket for FD/HFD Breaker

OEM part number	CDPFDZBRACKET (Relectric listing; some codes via search extracts of other listing pages)	C	S631 distributor
Description	IEM 'Z' Bracket for FD/HFD Breaker	C	same as above
Breaker compatibility	FD/HFD (from listing title)	C	same as above
Status	offered by Relectric; Relectric describes its reconditioned items as tested and certified with 1-year warranty (item condition not stated individually)	D	same as above
Cross-links	Families: IEM-CDP		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material		

9.4 KINNEY — Kinney panelboards

FAM-OTH-004 · panelboard · markings: Kinney

Kinney (Elgin, IL) panelboards appear in older commercial buildings; breaker type and lineage unverified. Lead only.

Attribute	Value	Cl.	Sources
Status	Company reportedly still in Elgin IL; legacy breaker support possibly via Eaton vintage products (forum)	D	S241 forum

Key documents: S241 Kinney Panel (forum thread)

9.5 WADSWORTH — Wadsworth panelboards and breakers

FAM-OTH-002 · panelboard · aka Waddsworth · markings: Wadsworth, Wadsworth Electric Mfg. Co.

Wadsworth Electric (Covington KY) made residential and light commercial panels and plug-in breakers; 3-pole A-series up to at least 90 A suggests 3-phase panelboards. No mounting hardware part numbers found.

Attribute	Value	Cl.	Sources
Status	Obsolete; reconditioned/NOS Wadsworth A- and B-series breakers sold by surplus dealers; Connecticut Electric replacements mentioned	C	S240, S229 distributor
Era of manufacture	Common 1950s-1960s; forum claims no Wadsworth breakers made since c.1970 (unsourced)	D	S240 forum
Branch breakers accepted	Wadsworth A-series (A15NI, A20NI, A230NI, A240NI, A250NI, A260NI, A320, A360, A390) and B-series (B1515, B1530NI, B3020NI)	C	S240, S229 distributor

Breaker families associated: Wadsworth A / B series

Key documents: S229 Superbreakers Murray + Wadsworth collections (products.json); S240 Wadsworth breaker listings and forum discussion

9.6 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00072	**UBIF015N**	Connecticut Electric UBI replacement breaker UBIF015N (FPE NC One Pole Thin Series, 15 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00073	**UBIF020N**	Connecticut Electric UBI replacement breaker UBIF020N (FPE NC One Pole Thin Series, 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00077	**UBIF0215N**	Connecticut Electric UBI replacement breaker UBIF0215N (FPE NC Two Pole Thin Series, 15 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00078	**UBIF0220N**	Connecticut Electric UBI replacement breaker UBIF0220N (FPE NC Two Pole Thin Series, 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00079	**UBIF0230N**	Connecticut Electric UBI replacement breaker UBIF0230N (FPE NC Two Pole Thin Series, 30 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00080	**UBIF0240N**	Connecticut Electric UBI replacement breaker UBIF0240N (FPE NC Two Pole Thin Series, 40 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00081	**UBIF0250N**	Connecticut Electric UBI replacement breaker UBIF0250N (FPE NC Two Pole Thin Series, 50 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00074	**UBIF030N**	Connecticut Electric UBI replacement breaker UBIF030N (FPE NC One Pole Thin Series, 30 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00075	**UBIF040N**	Connecticut Electric UBI replacement breaker UBIF040N (FPE NC One Pole Thin Series, 40 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00076	**UBIF050N**	Connecticut Electric UBI replacement breaker UBIF050N (FPE NC One Pole Thin Series, 50 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00082	**UBIF15N**	Connecticut Electric UBI replacement breaker UBIF15N (FPE NA One Pole Thick Series, 15 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00083	**UBIF20N**	Connecticut Electric UBI replacement breaker UBIF20N (FPE NA One Pole Thick Series, 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00087	**UBIF215N**	Connecticut Electric UBI replacement breaker UBIF215N (FPE NA Two Pole Thick Series, 15 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00088	**UBIF220N**	Connecticut Electric UBI replacement breaker UBIF220N (FPE NA Two Pole Thick Series, 20 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00089	**UBIF230N**	Connecticut Electric UBI replacement breaker UBIF230N (FPE NA Two Pole Thick Series, 30 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00090	**UBIF240N**	Connecticut Electric UBI replacement breaker UBIF240N (FPE NA Two Pole Thick Series, 40 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00091	**UBIF250N**	Connecticut Electric UBI replacement breaker UBIF250N (FPE NA Two Pole Thick Series, 50 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00092	**UBIF260N**	Connecticut Electric UBI replacement breaker UBIF260N (FPE NA Two Pole Thick Series, 60 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00093	**UBIF270N**	Connecticut Electric UBI replacement breaker UBIF270N (FPE NA Two Pole Thick Series, 70 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00084	**UBIF30N**	Connecticut Electric UBI replacement breaker UBIF30N (FPE NA One Pole Thick Series, 30 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00130	**UBIF340N**	Connecticut Electric UBI replacement breaker UBIF340N (number known only from reseller cross-reference)	—	unknown
EDH-OTH-00131	**UBIF380NB**	Connecticut Electric UBI replacement breaker UBIF380NB (number known only from reseller cross-reference)	—	unknown
EDH-OTH-00085	**UBIF40N**	Connecticut Electric UBI replacement breaker UBIF40N (FPE NA One Pole Thick Series, 40 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00086	**UBIF50N**	Connecticut Electric UBI replacement breaker UBIF50N (FPE NA One Pole Thick Series, 50 A)	—	current (sheet dated 2004 / Rev. 4/05)
EDH-OTH-00132	**UBIFPE1003**	Connecticut Electric UBI replacement breaker UBIFPE1003 (number known only from reseller cross-reference)	—	unknown

EDH-OTH-00072	UBIF015N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF015N (FPE NC One Pole Thin Series, 15 A)

OEM part number	UBIF015N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NC One Pole Thin Series, 1-pole, 120 V, 15 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-01930-5	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	15	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NC One Pole Thin Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00073	UBIF020N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF020N (FPE NC One Pole Thin Series, 20 A)

OEM part number	UBIF020N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NC One Pole Thin Series, 1-pole, 120 V, 20 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-01931-2	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NC One Pole Thin Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00077	UBIF0215N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF0215N (FPE NC Two Pole Thin Series, 15 A)

OEM part number	UBIF0215N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NC Two Pole Thin Series, 2-pole, 120/240 V, 15 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-00616-9	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	15	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NC Two Pole Thin Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00078	UBIF0220N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF0220N (FPE NC Two Pole Thin Series, 20 A)

OEM part number	UBIF0220N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NC Two Pole Thin Series, 2-pole, 120/240 V, 20 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-01933-6	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NC Two Pole Thin Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00079	UBIF0230N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF0230N (FPE NC Two Pole Thin Series, 30 A)

OEM part number	UBIF0230N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NC Two Pole Thin Series, 2-pole, 120/240 V, 30 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-01934-3	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	30	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NC Two Pole Thin Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00080	UBIF0240N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF0240N (FPE NC Two Pole Thin Series, 40 A)

OEM part number	UBIF0240N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NC Two Pole Thin Series, 2-pole, 120/240 V, 40 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-01935-0	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	40	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NC Two Pole Thin Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00081	UBIF0250N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF0250N (FPE NC Two Pole Thin Series, 50 A)

OEM part number	UBIF0250N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NC Two Pole Thin Series, 2-pole, 120/240 V, 50 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-01936-7	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	50	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NC Two Pole Thin Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00074	UBIF030N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF030N (FPE NC One Pole Thin Series, 30 A)

OEM part number	UBIF030N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NC One Pole Thin Series, 1-pole, 120 V, 30 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-01932-9	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	30	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NC One Pole Thin Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00075	UBIF040N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF040N (FPE NC One Pole Thin Series, 40 A)

OEM part number	UBIF040N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NC One Pole Thin Series, 1-pole, 120 V, 40 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-00621-3	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	40	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NC One Pole Thin Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00076	UBIF050N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF050N (FPE NC One Pole Thin Series, 50 A)

OEM part number	UBIF050N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NC One Pole Thin Series, 1-pole, 120 V, 50 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-00622-0	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	50	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NC One Pole Thin Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00082	UBIF15N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF15N (FPE NA One Pole Thick Series, 15 A)

OEM part number	UBIF15N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NA One Pole Thick Series, 1-pole, 120 V, 15 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-01937-4	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	15	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NA One Pole Thick Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615, S616 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00083	UBIF20N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF20N (FPE NA One Pole Thick Series, 20 A)

OEM part number	UBIF20N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NA One Pole Thick Series, 1-pole, 120 V, 20 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-01938-1	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NA One Pole Thick Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00087	UBIF215N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF215N (FPE NA Two Pole Thick Series, 15 A)

OEM part number	UBIF215N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NA Two Pole Thick Series, 2-pole, 120/240 V, 15 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-00617-6	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	15	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NA Two Pole Thick Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00088	UBIF220N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF220N (FPE NA Two Pole Thick Series, 20 A)

OEM part number	UBIF220N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NA Two Pole Thick Series, 2-pole, 120/240 V, 20 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-01940-4	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	20	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NA Two Pole Thick Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00089	UBIF230N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF230N (FPE NA Two Pole Thick Series, 30 A)

OEM part number	UBIF230N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NA Two Pole Thick Series, 2-pole, 120/240 V, 30 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-01941-1	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	30	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NA Two Pole Thick Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00090	UBIF240N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF240N (FPE NA Two Pole Thick Series, 40 A)

OEM part number	UBIF240N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NA Two Pole Thick Series, 2-pole, 120/240 V, 40 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-01942-8	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	40	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NA Two Pole Thick Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00091	UBIF250N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF250N (FPE NA Two Pole Thick Series, 50 A)

OEM part number	UBIF250N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NA Two Pole Thick Series, 2-pole, 120/240 V, 50 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-01943-5	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	50	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NA Two Pole Thick Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00092	UBIF260N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF260N (FPE NA Two Pole Thick Series, 60 A)

OEM part number	UBIF260N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NA Two Pole Thick Series, 2-pole, 120/240 V, 60 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-01944-2	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	60	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NA Two Pole Thick Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00093	UBIF270N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF270N (FPE NA Two Pole Thick Series, 70 A)

OEM part number	UBIF270N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NA Two Pole Thick Series, 2-pole, 120/240 V, 70 A, HACR rated; 10,000 A IR; UPC/I2of5 100-94925-41809-2	C	same as above
Poles	2	C	same as above
Voltage rating	120/240	C	same as above
Current rating	70	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NA Two Pole Thick Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00084	UBIF30N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF30N (FPE NA One Pole Thick Series, 30 A)

OEM part number	UBIF30N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NA One Pole Thick Series, 1-pole, 120 V, 30 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-01939-8	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	30	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NA One Pole Thick Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00130	UBIF340N	Connecticut Electric / UBI (per reseller text)	other	STATUS UNKNOWN

Connecticut Electric UBI replacement breaker UBIF340N (number known only from reseller cross-reference)

OEM part number	UBIF340N (number appears only in third-party reseller copy; not on 2005 UBI sheet)	D	S209 distributor
Replacement / successor	Superbreakers: FPE NA3P40 (40 A 3-pole Stab-Lok) 'crosses over with the UBIF340N' (seller cross-reference by a reseller of OEM/reconditioned breakers; unverified)	D	same as above
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Aftermarket / reproduction, Current rating, Description, Voltage rating		

EDH-OTH-00131	UBIF380NB	Connecticut Electric / UBI (per reseller text)	other	STATUS UNKNOWN

Connecticut Electric UBI replacement breaker UBIF380NB (number known only from reseller cross-reference)

OEM part number	UBIF380NB (number appears only in third-party reseller copy; not on 2005 UBI sheet)	D	S209 distributor
Replacement / successor	Superbreakers: FPE NB231080 (80 A 3-pole bolt-on, NBLP/NBC/NBDP/CDP) 'is replaced by the UBIF380NB' (seller cross-reference by a reseller of OEM/reconditioned breakers; unverified)	D	same as above
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Aftermarket / reproduction, Current rating, Description, Voltage rating		

EDH-OTH-00085	UBIF40N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF40N (FPE NA One Pole Thick Series, 40 A)

OEM part number	UBIF40N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NA One Pole Thick Series, 1-pole, 120 V, 40 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-01837-7	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	40	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NA One Pole Thick Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00086	UBIF50N	Connecticut Electric / UBI (Unique Breakers, Inc.)	other	CURRENT (SHEET DATED 2

Connecticut Electric UBI replacement breaker UBIF50N (FPE NA One Pole Thick Series, 50 A)

OEM part number	UBIF50N (aftermarket maker's catalog number (UBI prefix; marked 'Unique Breakers, Inc.'))	C	S615 p. 2, Specifications table; distributor
Description	Connecticut Electric UBI replacement circuit breaker, FPE NA One Pole Thick Series, 1-pole, 120 V, 50 A, SWD rated; 10,000 A IR; UPC/I2of5 100-94925-01838-4	C	same as above
Poles	1	C	same as above
Voltage rating	120	C	same as above
Current rating	50	C	same as above
Status	current (sheet dated 2004 / Rev. 4/05)	C	S615 distributor
Replacement / successor	Corresponds to: FPE NA One Pole Thick Series (seller table) (seller cross-reference; interchangeability not OEM-verified)	C	S615 p. 2, Specifications table; distributor
Aftermarket / reproduction	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; classification/listing wording quoted, not independently verified)	C	S615 distributor
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-OTH-00132	UBIFPE1003	Connecticut Electric / UBI (per reseller text)	other	STATUS UNKNOWN

Connecticut Electric UBI replacement breaker UBIFPE1003 (number known only from reseller cross-reference)

OEM part number	UBIFPE1003 (number appears only in third-party reseller copy; not on 2005 UBI sheet)	D	S209 distributor
Replacement / successor	Superbreakers: FPE NE234100 (100 A 3-pole NE) 'serves as a seamless substitute for the UBIFPE1003' (seller cross-reference by a reseller of OEM/reconditioned breakers; unverified)	D	same as above
Cross-links	Breakers: Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB)		
Not yet documented	Aftermarket / reproduction, Current rating, Description, Voltage rating		

10 Breaker Family Register

Breaker families referenced by the hardware entries. Mounting style and frame determine which connector and mounting kits apply.

BAB BRK-EAT-049 · Eaton lineage · aka QBHW, HQP, QPHW, BA, QBH, QBGF, QBHGF

Mounting	Bolt-on 1 in per pole; mounted on PRL1/PRL3 subchassis; KPRL1BAB connectors mount up to 12 poles	A	S14 p. 3; oem_spec
Replacement / successor	B10B/W10B/NQB BA -> BAB; NPLAB/NQP/Q10P/W10P QP -> HQP; W22B/Q22B QBH -> QBHW; W22P/Q22P QPH -> QPHW	A	S13 p. V12-T4-7; oem_spec
Used in	PRL1/PRL2, PRL3, NLAB		

BR BRK-EAT-051 · Eaton lineage · aka BW, BWH, BD, BQ, BQC

Mounting	1 in plug-on Type BR loadcenter breakers	A	S21 p. V12-T5-14; oem_spec
Used in	BR		

CA BRK-EAT-041 · Eaton lineage · aka CAH, HCA

Ampere range	100-225 A, 240 V; not recommended for motor loads	A	S14 p. 11 Table 15; oem_spec
Dimensions 3p	W 4.13 x H 6.50 x D 2.69 in; frame obsolete	A	S13 p. V12-T3-10; oem_spec
Used in	CDP, PRL3, PRL4		

CA/CAH/HCA 225 A frame BRK-EAT-012 · Eaton lineage · aka CA, CAH, HCA

Mounting	Bolt-on	A	S5 oem_spec
Breaker frame	225 A frame	A	same as above
Poles	2, 3	A	same as above
Ampere range	100-225 A	A	same as above
Voltage rating	240 Vac	A	same as above
Interrupting ratings	CA 10, CAH 22, HCA 42 kA	A	S5 p.11; oem_spec
Status	Legacy; not recommended for motor loads	A	S5 oem_spec
Used in	PRL3A, PRL4, PRL3, CDP		

Current-limiting FCL / LCL (and FDB+LFB) BRK-EAT-014 · Eaton lineage · aka FCL, LCL, LFB

Mounting	Bolt-on	A	S5 oem_spec
Breaker frame	FCL 100 A, LCL 400 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	FCL 15-100, LCL 125-400 A	A	same as above
Voltage rating	LCL 480 Vac	A	same as above
Interrupting ratings	LCL 200 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL3A, PRL4, CDP		

Cutler-Hammer CC / CCH / CHH BRK-EAT-067 · Eaton lineage · aka CC, CCH, CHH

Status	CC and CHH still listed as new breakers for PRL3a/PRL4B/PRL5P; CCH has no direct new breaker in the charts	A	S440 V12-T4-4/5/6; oem_spec
Used in	MP40, PH, EE, EP, NFB		

Cutler-Hammer CH / CHB BRK-EAT-066 · Eaton lineage · aka CH, CHB

Mounting	CH plug-on, CHB bolt-on	A	S440 V12-T4-4; oem_spec
Status	Current product (still used in PRL1a / PRL3a)	A	S440 oem_spec
Used in	PB, PH, CHP/CHB		

DA BRK-EAT-028 · Eaton lineage · aka Westinghouse DA

Ampere range	250-400 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	Series C DK (KCDPDK)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

E BRK-EAT-036 · Eaton lineage · aka EA, EH, Westinghouse E-frame

Status	out of production; last manufactured 1974	A	S13 p. V12-T3-10; oem_spec
Dimensions 3p	E/EA: W 4.13 x H 6.00 x D 3.38 in; EH: W 4.13 x H 6.50 x D 3.38 in	A	same as above
Replacement / successor	Panelboard-only replacement breakers RE/REA (obsolete) -> REH (3-pole only)	A	S13 p. V12-T3-81; oem_spec
Used in	CDP, NAB		

EB BRK-EAT-020 · Eaton lineage · aka Westinghouse EB

Ampere range	15-100 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	Still manufactured as a 'replacement circuit breaker' for exact replacement (frame listed obsolete; see cross-reference)	A	S13 p. V12-T3-10 note 1; oem_spec
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in (3-pole)	A	S13 p. V12-T3-10; oem_spec
Replacement / successor	Series C EHD; CDP retrofit kit KCDPEHD; same X space	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

ED BRK-EAT-040 · Eaton lineage · aka EDH, EDC, EDB, EDS

Ampere range	100-225 A (EDC 15-225 A); 240 V max	A	S14 p. 11 Table 15; oem_spec
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

EHB BRK-EAT-021 · Eaton lineage · aka Westinghouse EHB

Ampere range	15-100 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured; frame obsolete	A	S13 p. V12-T3-10; oem_spec
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in	A	same as above
Replacement / successor	Series C EHD (KCDPEHD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

EHD BRK-EAT-038 · Eaton lineage

Breaker frame	100 A frame (E-frame Series C)	A	S14 p. 11 Table 15; oem_spec
Ampere range	15-100 A	A	same as above
Interrupting ratings	1P 277 V 14 kA; 2/3P 240 V 18 kA, 480 V 14 kA	A	same as above
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

Eaton Type CL classified replacement breakers BRK-EAT-068 · Eaton lineage · aka CL, CLCAF, CLGF, CLDF, Type CL 1-Inch classified replacement breaker

Mounting	1 in plug-on classified replacement breaker	A	S618 oem_spec
Interrupting ratings	10 kAIC (CL245)	A	same as above
Classified for	Eaton catalog notes (CL245): 'Replacement for Square D Homeline, GE Type THQ, Crouse-Hinds Type MP, Thomas and Betts Type TB, Murray Type MP, ITE/Siemens Type QP. Requires Two 1-inch (25.4 mm) spaces.' (exact load-center catalog numbers are in the breaker instruction leaflet / Eaton classified compatibility chart (BR003034EN), not retrieved)	A	S618 p. 1; oem_spec
Listing / approvals	UL classified (UL 489 certification on spec sheet); classification is for specific listed load centres named by Eaton - not the same as listing	C	S618, S619 distributor

F BRK-EAT-037 · Eaton lineage · aka FA, HF, HFA, Westinghouse F-frame

Status	out of production; last manufactured 1974	A	S13 p. V12-T3-10; oem_spec
Dimensions 3p	F/HF: W 4.13 x H 9.38 x D 4.06 in; FA/HFA: W 4.13 x H 6.50 x D 3.38 in	A	same as above
Replacement / successor	RHF (F/HF), RHFA (FA/HFA), three-pole only	A	S13 p. V12-T3-81; V12-T4-4; oem_spec
Used in	CDP, NAB		

FB BRK-EAT-022 · Eaton lineage · aka Westinghouse FB

Ampere range	15-150 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured; frame obsolete	A	S13 p. V12-T3-10, p. V12-T3-11; oem_spec
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-11; oem_spec
Replacement / successor	Series C FDB (KCDPFDB); PRL4B replacement FDB	A	S14, S13 RP01400002E p. 13 Table 18; V12-T4-4; oem_spec
Used in	CDP, WEB, WF/WRP		

FD BRK-EAT-039 · Eaton lineage · aka FDB, HFD, FDC, FD-frame

Breaker frame	225 A F-frame Series C (FDB 15-225, FD/HFD/FDC 15-225)	A	S14 p. 11 Table 15; oem_spec
Interrupting ratings	FDB 480 V 14 kA; FD 25 kA; HFD 65 kA; FDC 100 kA at 480 V	A	same as above
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

GB BRK-EAT-050 · Eaton lineage · aka GHB, GHBS

Mounting	Bolt-on; PRL2 subchassis via KPRL2GHB; GB/GHB cannot be mixed on same subchassis as BAB/QBH	A	S14 p. 3; V12-T4-16 note 3; oem_spec
Used in	PRL1/PRL2, PRL3		

GHB family (480Y/277 bolt-on) BRK-EAT-003 · Eaton lineage · aka GB, GHB, GHBGFEP, GHBS, GHQ, GHQRSP, HGHB

Mounting	Bolt-on	A	S7 oem_spec
Poles	1, 2, 3	A	same as above
Ampere range	15-100 A	A	S7 Table 22.2-2; oem_spec
Voltage rating	277 V 1-pole, 480Y/277 Vac multi-pole; 125/250 Vdc	A	S7 oem_spec
Interrupting ratings	GHB 65 kA @240, 14 kA @480Y/277; HGHB 25 kA @277	A	same as above
Status	Current	B	S6, S7 oem_spec
Used in	PRL2A, PRL3A, PRL2X, PRL3X, PRL1/PRL2		

HFB BRK-EAT-023 · Eaton lineage · aka Westinghouse HFB

Ampere range	15-150 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured	A	S13 p. V12-T3-10; oem_spec
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-11; oem_spec
Replacement / successor	Series C FD (KCDPFD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

JA BRK-EAT-026 · Eaton lineage · aka Westinghouse JA

Ampere range	70-225 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	Series C KDB (KCDPKDB); when upgrading JA to Series C K-frame in panelboard, order TAD3 spacer kit	A	S14, S13 RP01400002E p. 13 Table 18; Vol12 Tab 3 JA note; oem_spec
Used in	CDP		

JB BRK-EAT-027 · Eaton lineage · aka Westinghouse JB

Ampere range	70-250 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 4.13 x H 10.00 x D 4.06 in	A	same as above
Replacement / successor	Series C JDB (KCDPJDB)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

JD BRK-EAT-042 · Eaton lineage · aka JDB, HJD, JDC

Ampere range	70-250 A	A	S14 p. 11; oem_spec
Dimensions 3p	W 4.13 x H 10.00 x D 4.06 in	A	S13 p. V12-T3-11; oem_spec
Used in	CDP, PRLC, PRL4		

KA BRK-EAT-024 · Eaton lineage · aka HKA, Westinghouse KA

Ampere range	70-225 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11 note 2; oem_spec
Dimensions 3p	W 5.50 x H 10.13 x D 4.06 in	A	S13 p. V12-T3-11; oem_spec
Replacement / successor	KA -> KD (KCDPKD); HKA -> HKD (KCDPHKD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

KB BRK-EAT-025 · Eaton lineage · aka HKB, Westinghouse KB

Ampere range	70-250 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 4.13 x H 10.00 x D 4.06 in	A	same as above
Replacement / successor	Series C JD (KCDPJD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

KD BRK-EAT-043 · Eaton lineage · aka DK, KDB, HKD, KDC, CKD, CHKD

Ampere range	KD/KDB/HKD/KDC 100-400 A; DK 250-400 A 240 V	A	S14 p. 11; oem_spec
Dimensions 3p	W 5.50 x H 10.13 x D 4.06 in	A	S13 p. V12-T3-11; oem_spec
Adapter	Requires TAD3 adapter/spacer kit when mounted onto existing LB-frame connectors or when upgrading HLB/LBB/JA in a panelboard	A	S14, S13 RP01400002E p. 13; V12-T3-11 note 1; oem_spec
Used in	CDP, PRLC, PRL4		

LA BRK-EAT-029 · Eaton lineage · aka HLA, LAB, Westinghouse LA

Ampere range	250-600 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame (HLA still in panelboard-only list)	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 8.25 x H 10.75 x D 4.06 in	A	same as above
Replacement / successor	Series C LD (KCDPLD); LAB -> LDB	A	S14, S13 RP01400002E p. 13 Table 18; V12-T4-4; oem_spec
Used in	CDP		

LB BRK-EAT-030 · Eaton lineage · aka LBB, HLB, Westinghouse LB

Ampere range	LB 70-400 A; LBB/HLB 125-400 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	LB/HLB -> KD (KCDPKD); LBB -> KDB (KCDPKDB); Series C K-family requires TAD3 adapter kit when mounting on existing LB connectors	A	S14 RP01400002E p. 13 Table 18 and note; oem_spec
Used in	CDP		

LC BRK-EAT-031 · Eaton lineage · aka HLC, Westinghouse LC

Ampere range	300-600 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	replacement breaker still manufactured (LC obsolete per note 2)	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 8.25 x H 10.75 x D 4.06 in	A	same as above
Replacement / successor	Series C LD (KCDPLD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

LD BRK-EAT-044 · Eaton lineage · aka HLD, LDC, LDB, CLD

Ampere range	300-600 A	A	S14 p. 11; oem_spec
Dimensions 3p	W 8.25 x H 10.75 x D 4.06 in	A	S13 p. V12-T3-11; oem_spec
Used in	CDP, PRLC, PRL4		

MA BRK-EAT-032 · Eaton lineage · aka HMA, Westinghouse MA

Ampere range	125-800 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	MA obsolete; HMA replacement breaker	A	S13 p. V12-T3-12; oem_spec
Dimensions 3p	W 8.25 x H 16.00 x D 4.06 in	A	same as above
Replacement / successor	Series C MDL (KCDPMDL)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

MC BRK-EAT-033 · Eaton lineage · aka HMC, MCC, Westinghouse MC

Ampere range	400-800 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-12; oem_spec
Replacement / successor	Series C MDL (KCDPMDL)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

MDL BRK-EAT-045 · Eaton lineage · aka HMDL, CMDL

Ampere range	300-800 A	A	S14 p. 11; oem_spec
Dimensions 3p	W 8.25 x H 16.00 x D 4.06 in	A	S13 p. V12-T3-12; oem_spec
Used in	CDP, PRLC, PRL4		

NB BRK-EAT-034 · Eaton lineage · aka HNB, Westinghouse NB

Ampere range	700-1200 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-12; oem_spec
Dimensions 3p	W 8.25 x H 16.00 x D 5.50 in	A	same as above
Replacement / successor	Series C ND (KCDPND)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

NC BRK-EAT-035 · Eaton lineage · aka HNC, Westinghouse NC

Ampere range	600-1200 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-12; oem_spec
Replacement / successor	Series C ND (KCDPND)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Box depth	In MP40 panels only NC/HNC require 11.38 in deep box (standard 10.50 in)	A	S13 p. V12-T4-12 note 3; oem_spec
Used in	CDP		

ND BRK-EAT-046 · Eaton lineage · aka HND, NDC, CND

Ampere range	600-1200 A	A	S14 p. 11; oem_spec
Dimensions 3p	W 8.25 x H 16.00 x D 5.50 in	A	S13 p. V12-T3-12; oem_spec
Used in	CDP, PRLC, PRL4		

Power Defense frame 2 (PDG2 / PDD2) BRK-EAT-015 · Eaton lineage · aka PDG2, PD2, PG2, PDG2xF, PDG2xG, PDG2xM, PDG2xP, PDD2xG

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	225 A frame	A	same as above
Poles	1, 2, 3	A	same as above
Ampere range	15-225 A	A	S6 oem_spec
Voltage rating	600 Vac class	C	S6 inference
Status	Current	A	S6 oem_spec
Used in	PRL1X, PRL2X, PRL3X, PRL4X		

Power Defense frame 3 (PDG3 / PDF3 / PDD3) BRK-EAT-016 · Eaton lineage · aka PDG3, PD3, PG3, PF3, PDG3A, PDG3B, PDF3

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	400 A and 600 A frames	A	S1 p.32 Table 46; oem_spec
Poles	3	A	S1 oem_spec
Ampere range	up to 600 A	A	same as above
Status	Current	A	S6 oem_spec
Used in	PRL1X, PRL2X, PRL3X, PRL4X		

Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5) BRK-EAT-017 · Eaton lineage · aka PDG4, PDG5, PG4, PF4, PG5, PF5

Mounting	Bolt-on single mount	A	S1 oem_spec
Breaker frame	800 A (4) / 1200 A (5)	A	S1 p.34 Table 49; oem_spec
Poles	3	A	S1 oem_spec
Ampere range	300-1200 A	A	same as above
Status	Current	A	S6 oem_spec
Used in	PRL4X		

QUICKLAG bolt-on (BAB/QBHW family) BRK-EAT-001 · Eaton lineage · aka BA, BAB, BAB-C, BAB-D, BABRP, BABRSP, QBCAF, QBGF, QBGFEP, QBH, QBHCAF, QBHGF, QBHGFEP, QBHW

Mounting	Bolt-on (horizontal on PRL1a/1X branch connector assemblies; 100 A BAB/QBH mains also horizontal)	A	S7 p.22.1-1; oem_spec
Breaker frame	QUICKLAG 1 in per pole	C	S7 inference
Poles	1, 2, 3	A	S7 oem_spec
Ampere range	15-100 A	A	S7 Table 22.1-2; oem_spec
Voltage rating	120/240 Vac	A	S7 oem_spec
Interrupting ratings	BAB 10 kA; QBHW 22 kA at 240 Vac	A	S7 Table 22.1-2; oem_spec
Status	Current	B	S6, S7 oem_spec
Used in	PRL1A, PRL3A, PRL1X, PRL3X, PRL1/PRL2		

QUICKLAG plug-on (HQP/QPHW family) BRK-EAT-002 · Eaton lineage · aka HQP, QHPX, QPGF, QPGFEP, QPHGF, QPHGFEP, QPHW

Mounting	Plug-on (2C11642 connector assemblies)	A	S1 p.9; oem_spec
Poles	1, 2, 3	A	S7 oem_spec
Ampere range	15-100 A	A	same as above
Voltage rating	120/240 Vac	A	same as above
Interrupting ratings	HQP 10 kA; QPHW 22 kA	A	S7 Table 22.1-2; oem_spec
Status	Current	B	S6, S7 oem_spec
Used in	PRL1A, PRL1X		

RD BRK-EAT-047 · Eaton lineage · aka RG

Ampere range	1600/2000/2500 A	A	S13 p. V12-T3-12; oem_spec
Dimensions 3p	W 15.50 x H 16.00 x D 9.75 in	A	same as above
Replacement / successor	RD replaces PC, PCC and PB breakers for 2000 and 2500 A only	A	S13 p. V12-T3-12 note 1; oem_spec
Used in	PRLC, WF/WRP		

Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) BRK-EAT-005 · Eaton lineage · aka ED, EDB, EDC, EDH, EDS

Mounting	Bolt-on; single mount 175-225 A in PRL3a	A	S1 oem_spec
Breaker frame	225 A frame	A	S7 oem_spec
Poles	2, 3	A	S5 oem_spec
Ampere range	100-225 A	A	same as above
Voltage rating	240 Vac	A	same as above
Interrupting ratings	ED 65, EDH 100, EDC 200, EDB 22, EDS 42 kA @240 V	A	S5, S7 oem_spec
Status	Legacy	C	 inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, PRL3, CDP		

Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) BRK-EAT-052 · Eaton lineage · aka FD, HFD, FDC, EHD, FDB, FDE, HFDE, FDCE, ED, EDH, EDC

Breaker frame	F-Frame	A	S184 pp.12-85..12-91; oem_spec
Ampere range	10-225 A	A	same as above

Series C F-frame (EHD/FDB/FD/HFD/FDC) BRK-EAT-004 · Eaton lineage · aka EHD, FD, FD/LFD, FDB, FDC, FDCE, FDE, HFD, HFDE, LFD

Mounting	Bolt-on to panel connectors	A	S1 oem_spec
Breaker frame	F-frame 100/150/225 A	A	S7 oem_spec
Poles	1, 2, 3	A	same as above
Ampere range	15-225 A	A	same as above
Voltage rating	FD/HFD/FDC 600 Vac; EHD 480 Vac; FDB 600 Vac	A	S5 p.11 Table 15; oem_spec
Interrupting ratings	EHD 18/14 kA; FD 65/25(35)/18; HFD 100/65/25; FDC 200/100/35 kA (240/480/600)	A	S5, S7 oem_spec
Status	Series C legacy; replaced in Xpert panels by Power Defense PDG2	B	S1, S6 inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, PRL3, CDP, PRL5P		

Series C G-Frame (GD/GHC/GHB) BRK-EAT-059 · Eaton lineage · aka GD, GDB, GHB, GHC

Breaker frame	G-Frame	A	S184 p.12-243..12-248; oem_spec
Ampere range	15-100 A	A	same as above

Series C J-Frame (JD/HJD/JDC/JDB) BRK-EAT-053 · Eaton lineage · aka JD, HJD, JDC, JDB, JDB250

Breaker frame	J-Frame	A	S185 pp.12-87..12-91; oem_spec
Ampere range	70-250 A	A	same as above

Series C J-frame (JD/JDB/HJD/JDC) BRK-EAT-006 · Eaton lineage · aka HJD, HJDDC, JD, JDB, JDC

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	250 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	70-250 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	JD 65/35/18; HJD 100/65/25; JDC 200/100/35 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, CDP		

Series C K-Frame (KD/HKD/KDC/KDB) BRK-EAT-054 · Eaton lineage · aka KD, HKD, KDC, KDB, CKD, CHKD

Breaker frame	K-Frame	A	S184 p.12-113; oem_spec
Ampere range	70-400 A	A	same as above

Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) BRK-EAT-007 · Eaton lineage · aka CHKD, CKD, CKDC, DK, HKD, KD, KDB, KDC

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	400 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	100-400 A (DK 250-400)	A	same as above
Voltage rating	600 Vac (DK 240 Vac)	A	same as above
Interrupting ratings	KD 65/35/25; HKD 100/65/35; KDC 200/100/50 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, CDP		

Series C L-Frame (LD/HLD/LDC/LDB) BRK-EAT-055 · Eaton lineage · aka LD, HLD, LDC, LDB, HLDDC

Breaker frame	L-Frame	A	S186 V4-T2-188/190; oem_spec
Ampere range	300-600 A	A	same as above

Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) BRK-EAT-008 · Eaton lineage · aka CHLD, CLD, CLDC, HLC, HLCC, HLD, LC, LCC, LCY, LD, LDB, LDC

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	600 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	300-600 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	LD 65/35/25; HLD 100/65/35; LDC 200/100/50 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL3A, PRL4, CDP		

Series C M-Frame (MDL/HMDL/MDLB) BRK-EAT-056 · Eaton lineage · aka MDL, HMDL, MDLB, HMDLB

Breaker frame	M-Frame	A	S184 p.12-140; oem_spec
Ampere range	up to 800 A	A	same as above

Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) BRK-EAT-010 · Eaton lineage · aka CHMDL, CMDL, HMA, HMC, HMCC, HMDL, MA, MC, MCC, MCY, MDL, MDS, MDSC

Mounting	Bolt-on single mount	A	S1 oem_spec
Breaker frame	800 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	300-800 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	MDL 65/50/25; HMDL 100/65/35 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL4, CDP, PRL5P		

Series C N-Frame (ND/HND/NDC/NB) BRK-EAT-057 · Eaton lineage · aka ND, HND, NDC, NB, NBDC

Breaker frame	N-Frame	A	S184 p.12-162; oem_spec
Ampere range	up to 1200 A	A	same as above

Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) BRK-EAT-011 · Eaton lineage · aka CHND, CND, CNDC, HNB, HNC, HND, NB, NC, NCY, ND, NDC, NGC, NGH, NGS, NHH

Mounting	Bolt-on single mount	A	S1 oem_spec
Breaker frame	1200 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	600-1200 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	ND 65/35/25; HND 100/65/35; NDC 200/100/50 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL4, CDP, PRL5P		

Series C R-Frame (RD/RDC) BRK-EAT-058 · Eaton lineage · aka RD, RDC

Breaker frame	R-Frame	A	S184 p.12-181; oem_spec
Ampere range	800-2500 A	A	same as above

Series G E-frame (EGB/EGS/EGH) BRK-EAT-018 · Eaton lineage · aka EGB, EGS, EGH, EGE

Mounting	Bolt-on	A	S7 oem_spec
Breaker frame	125 A frame	A	same as above
Poles	1, 2, 3	A	same as above
Ampere range	15-125 A	A	same as above
Voltage rating	480 Vac	A	same as above
Interrupting ratings	EGB 25/18; EGS 85/35; EGH 100/65 kA (240/480)	A	S7 Table 22.3-9; oem_spec
Status	Current	C	inference
Used in	PRL3E		

Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) BRK-EAT-060 · Eaton lineage · aka EG, EGB, EGC, EGE, EGH, EGS

Breaker frame	EG-Frame	A	S187 V4-T2-16..27; oem_spec
Ampere range	15-125 A (160 A IEC)	A	same as above

Series G JG-Frame (JGE/JGS/JGH/JGC) BRK-EAT-061 · Eaton lineage · aka JG, JGC, JGE, JGH, JGS

Breaker frame	JG-Frame	A	S184 p.12-28; oem_spec
Ampere range	63-250 A	A	same as above

Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH BRK-EAT-009 · Eaton lineage · aka LGE, LGS, LGH, LGC, LGU, LHH

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	600 A frame (LHH 400 A)	A	S7 oem_spec
Poles	3	A	S1 oem_spec
Ampere range	up to 600 A	A	S7 oem_spec
Voltage rating	600 Vac	A	same as above
Interrupting ratings	LGE 65/35/18; LGH 100/65/35; LGC/LGU 200 kA @240	A	same as above
Status	Current/legacy	C	inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, PRL4X		

Series G LG-Frame (LGE/LGS/LGH/LGC) BRK-EAT-062 · Eaton lineage · aka LG, LGC, LGE, LGH, LGS

Breaker frame	LG-Frame	A	S184 p.12-37; oem_spec
Ampere range	250-630 A (600 A UL/CSA)	A	same as above

Series G NG-Frame BRK-EAT-063 · Eaton lineage · aka NG, NGC, NGH, NGS

Breaker frame	NG-Frame	A	S184 p.12-48; oem_spec
Ampere range	up to 1250/1600 A	A	same as above

TRI-PAC integrally fused (FB-P, LA-P, NB-P) BRK-EAT-013 · Eaton lineage · aka FB-P, LA-P, NB-P

Mounting	Bolt-on	A	S5 oem_spec
Breaker frame	FB-P 100 A, LA-P 400 A, NB-P 800 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	15-800 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	200 kA	A	S5 p.11; oem_spec
Status	Legacy	C	inference
Used in	PRL3A, PRL4, CDP		

Tri-Pac BRK-EAT-048 · Eaton lineage · aka FB-P, LA-P, NB-P, TRI-PAC

Ampere range	FB-P 15-100 A; LA-P 70-400 A; NB-P 300-800 A; 200 kA at 600 V	A	S14 p. 11 Table 15; oem_spec
Used in	CDP, PRL4		

Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) BRK-EAT-065 · Eaton lineage · aka AB De-ion, E frame, EB, EHB

Ampere range	15-800 A (CDP 1957)	A	S454 oem_spec
Voltage rating	Up to 600 V AC / 250 V DC	A	same as above
Used in	CDP, NAB, MP40, NFB		

Westinghouse Quicklag (QC / QL / QP) lighting breakers BRK-EAT-064 · Eaton lineage · aka Quicklag, QC, QL, QP

Mounting	Plug-in (Quicklag in NLAB); QC listed for Westinghouse NLAB, QL for Cutler-Hammer NLAB, QP for NPLAB/NQP	A	S435, S440 V12-T4-4, V12-T4-7; oem_spec
Status	Out of production; NLAB connectors not available	A	S440 oem_spec
Used in	NLAB		

Westinghouse pre-Series C industrial MCCBs BRK-EAT-019 · Eaton lineage · aka EB, EHB, FB, HFB, KA, HKA, KB, HKB, JA, JB, DA, LA, HLA, LB, LBB, HLB, LC, HLC, MA, HMA, MC, NB, HNB, NC, HNC

Mounting	Bolt-on to CDP chassis connectors	A	S5 oem_spec
Breaker frame	Various	A	same as above
Ampere range	15-1200 A	A	S5 p.13 Table 18; oem_spec
Status	Obsolete; Eaton cross-references each to a Series C retrofit kit using same X space	A	S5 p.13; oem_spec
Used in	CDP		

Fusematic XF / XM / XKL / XJL BRK-FPE-009 · Federal Pacific Electric · aka Fusematic, XF, XM, XKL, XJL

Mounting	bolt-on	C	S209 distributor
Ampere range	to 225 A (XJL225 limiter)	C	same as above
Voltage rating	600 VAC	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Used in	FPE-SWBD		

NA / NC (Stab-Lok plug-in) BRK-FPE-002 · Federal Pacific Electric · aka NA (thick, 1 in/pole), NC (thin), Stab-Lok

Mounting	plug-in Stab-Lok	C	S209, S223 distributor
Ampere range	15-100 A	C	same as above
Voltage rating	120/240 VAC	C	same as above
Interrupting ratings	10 kA	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Aftermarket / reproduction	Connecticut Electric UBIF series (e.g., UBIF15N = NA115, UBIF20N = NA120, UBIF0230N = NC230), 10 kAIC ETL	C	S223, S209 distributor
Used in	NA1B		

NB (Stab-Lok bolt-on) BRK-FPE-001 · Federal Pacific Electric · aka NB Stab-Lok, UBIF...NB (Connecticut Electric replacement)

Mounting	bolt-on (NBLP panelboards)	C	S209, S217 distributor
Ampere range	15-100 A (e.g., NB100 2P 100 A)	C	same as above
Voltage rating	120/240 VAC	C	same as above
Interrupting ratings	10 kA (listing)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Used in	NBLP		

NE / NEF / NEG / HEF / HEG (N-frame 100 A class) BRK-FPE-003 · Federal Pacific Electric · aka NE, NEF, NEG, HEF, HEG, NES (stab), NEF4.., NEF6..

Mounting	bolt-on; NES variants stab-type	C	S209, S206, S228 distributor
Breaker frame	NE frame (same physical size for NE/NEF per JRL Electric explainer)	C	same as above
Ampere range	15-100 A	C	same as above
Voltage rating	NE: 240 VAC/250 VDC; NEF: 480 VAC (2-3P) / 277 V (1P); HEF/HEG: 600 VAC	C	same as above
Interrupting ratings	NE 18 kA@240 (listing); NEF 14 kA@480; HEF 25 kA@480; HEF213020 1P 22 kA@277	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Kits	Twin kits: KCDP1C (CDP), KBDP1C (BDP), NDPNE (NDP), NAIB-NEF / KCDP-1A (NA1B/NH1B)	C	S206, S208, S210 distributor
Used in	CDP, BDP, NDP, NA1B		

NEJ / NEJH / HEJ (N-frame 225 A class) BRK-FPE-004 · Federal Pacific Electric · aka NEJ, NEJH, HEJ

Mounting	bolt-on	C	S209, S206, S211 distributor
Ampere range	to 225 A (NEJ233200, NEJH223225, HEJ222200)	C	same as above
Voltage rating	240 V (NEJ) / higher-IC and 600 V variants (H-prefix)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Kits	KCDP2C (CDP), KBDP2C (BDP), NDPNEJ (NDP)	C	S206, S209, S211 distributor
Used in	CDP, BDP, NDP		

NF / NFJ / HFJ / NFS (N-frame 225 A class) BRK-FPE-005 · Federal Pacific Electric · aka NF, NFJ, HFJ, NFS (stab-in)

Mounting	bolt-on; NFS stab-in	C	S209, S206 distributor
Ampere range	15-225 A	C	same as above
Voltage rating	600 VAC	C	same as above
Interrupting ratings	NFJ 18 kA@480 (listing)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Kits	KCDP3C / NFJ1K (CDP); NFJ3K (BDP-style, OEM equivalent not stated)	C	S206, S208 distributor
Used in	CDP		

NJL / HJL / NJ / NJJ (N-frame 400 A class) BRK-FPE-006 · Federal Pacific Electric · aka NJL, HJL, NJ, NJJ, XJL (current limiter)

Mounting	bolt-on	C	S209, S206 distributor
Ampere range	to 400 A	C	same as above
Voltage rating	600 VAC	C	same as above
Interrupting ratings	NJ 30 kA@480; HJL 22 kA@600; NJJ 22 kA (listings)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Kits	KCDP4C / NJL1K (CDP); KBDP4C / NJL3K (BDP)	C	S206, S209 distributor
Used in	CDP, BDP, FPE-SWBD		

NM / HM / NN / NP / NK (large N-frames) BRK-FPE-007 · Federal Pacific Electric · aka NM, HNM, HM, NN (switch), NP, NK

Mounting	bolt-on	C	S209, S208 distributor
Ampere range	NM 400-800 A (trip units NM031400-NM031800); NN 1200 A switch; NP to 1600 A	C	same as above
Voltage rating	600 VAC	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Kits	KCDP5C (CDP, NM/NN) and KBDP5C (BDP, NM/HNM)	C	same as above
Lugs	NM34 (1) #1/0-600 kcmil 125-300 A; NM36 (2) 3/0-600 kcmil 350-600 A; NM38 (3) 250-500 kcmil 700-800 A; N32 lug kit for NN	C	S208 surplus
Used in	CDP, BDP, FPE-SWBD		

QMQB fusible panelboard switch BRK-FPE-008 · Federal Pacific Electric · aka QMQB

Mounting	bolt-on fusible switch unit (FDP)	C	S209 distributor
Ampere range	30-1200 A	C	same as above
Voltage rating	240 V (..32..) / 600 V (..36..)	C	same as above
Interrupting ratings	200 kA with class R/J/K/L fuses	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Used in	FDP		

ABB A2 (Formula A2) molded case breaker BRK-GEA-033 · GE / ABB lineage · aka A2

ABB SACE Tmax XT (XT1/XT2/XT4/XT5/XT6/XT7) BRK-GEA-032 · GE / ABB lineage · aka Tmax XT, XT1, XT2, XT4, XT5, XT6, XT7

Note	ABB molded case breakers used in ReliaGear lighting/neXT panelboards and ReliaGear SB switchboards	A	S666, S672 oem_spec

E150 line (TEB, TED, THED, TEC) BRK-GEA-017 · GE / ABB lineage · aka E-150, E150, TB1, TEB, TEC, TED, THED, THLC1

Breaker frame	E150 (150 A)	A	S198 p. 6-34 and 6-102; oem_spec
Ampere range	10-150 A	A	same as above

F225 line (TFJ, TFK, THFK, TFC) BRK-GEA-018 · GE / ABB lineage · aka F225, TFC, TFJ, TFK, THFK, THLC2

Breaker frame	F225 (225/250 A)	A	S198 p. 6-101 to 6-102; oem_spec

GE / Trumbull Type AT and ATB breakers BRK-GEA-030 · GE / ABB lineage · aka AT, ATB

Ampere range	AT 15-50 A branch in NAB/ABH; mains 50 A AT, 100 A ATB, 200 A AT in NLAB	A	S452 oem_spec
Used in	NHB, NLAB		

GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) BRK-GEA-031 · GE / ABB lineage · aka TB1, TB4, TB6, TB8

Mounting	Bolted with DPK (twin) / SPK (single) strap kits in CCB, QMR and AV1/AV2	C	S444 surplus_listing
Used in	CCB-QMR, AV-LINE		

GE TQ / TQL / TQC / TQB / TBQ lighting breakers BRK-GEA-029 · GE / ABB lineage · aka TBQ, TQ, TQB, TQC, TQL

Mounting	TQL: plug-in, quick-make quick-break, thermal-magnetic (first plug-in QMQB breaker per Trumbull 1951-52); TQ in NLAB (formerly NTQ)	A	S452, S461 oem_spec
Ampere range	Standard ratings 15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 80, 90, 100 A (GEG-13610B); TQL 15-50 A 1-pole and common-trip 2/3-pole (1957)	A	S453, S454 oem_spec
Used in	NLAB		

J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) BRK-GEA-019 · GE / ABB lineage · aka J400, J600, TB4, THJK, THLC4, TJC, TJD, TJJ, TJK, TLB4

Breaker frame	J400 / J600	A	S198 p. 6-36 to 6-37 and 6-102; oem_spec
Ampere range	200-600 A	A	same as above

K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) BRK-GEA-020 · GE / ABB lineage · aka K1200, TB6, TB8, THKMA, TK4V, TKM, TKMA

Breaker frame	K1200	A	S198, S200 p. 6-102; oem_spec
Ampere range	300-1200 A	A	same as above

Record Plus FB (FBV/FBN/FBH/FBL) BRK-GEA-010 · GE / ABB lineage · aka FB

Mounting	bolt-on	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, RG-NEXT		

Record Plus FB 100 BRK-GEA-025 · GE / ABB lineage · aka FB100, FBH, FBN, FBV

Breaker frame	FB 100	A	S198 p. 6-68 to 6-73; oem_spec
Ampere range	15-100 A	A	same as above

Record Plus FC (FCS/FCV/FCN/FCH/FCL) BRK-GEA-011 · GE / ABB lineage · aka FC, FD

Mounting	bolt-on / module	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	up to 100 A	A	same as above
Used in	SPECTRA-PP		

Record Plus FC 100 BRK-GEA-026 · GE / ABB lineage · aka FC100

Breaker frame	FC 100	A	S198 p. 6-74 to 6-78; oem_spec
Ampere range	15-100 A	A	same as above

Record Plus FE 250 BRK-GEA-027 · GE / ABB lineage · aka FE250

Breaker frame	FE 250	A	S198 p. 6-79 to 6-81; oem_spec
Ampere range	25-250 A	A	same as above

Record Plus FG (FGV/FGN/FGH/FGL/FGP) BRK-GEA-012 · GE / ABB lineage · aka FG

Mounting	bolt-on / module	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	up to 600 A	A	same as above
Used in	SPECTRA-PP		

Record Plus FG 600 BRK-GEA-028 · GE / ABB lineage · aka FG600

Breaker frame	FG 600	A	S198 p. 6-83 to 6-88; oem_spec
Ampere range	100-600 A	A	same as above

Spectra RMS SE150 BRK-GEA-021 · GE / ABB lineage · aka SE1, SE150, SED, SEH, SEL, SEP

Breaker frame	SE150	A	S198 p. 6-44, 6-103; oem_spec
Ampere range	15-150 A	A	same as above

Spectra RMS SF250 BRK-GEA-022 · GE / ABB lineage · aka SF250, SFH, SFL, SFP

Breaker frame	SF250	A	S198 p. 6-46, 6-103; oem_spec
Ampere range	70-250 A	A	same as above

Spectra RMS SG600 BRK-GEA-023 · GE / ABB lineage · aka SG400, SG600, SGD, SGH, SGL, SGP

Breaker frame	SG600 (400/600 A)	A	S198 p. 6-48, 6-103; oem_spec
Ampere range	125-600 A	A	same as above

Spectra RMS SK1200 BRK-GEA-024 · GE / ABB lineage · aka SK1200, SK800, SKD, SKH, SKL, SKP

Breaker frame	SK1200	A	S198 p. 6-51, 6-103; oem_spec
Ampere range	300-1200 A	A	same as above

Spectra SE (SEDA/SEHA/SELA/SEPA) BRK-GEA-006 · GE / ABB lineage · aka SE-frame, Spectra RMS E

Mounting	bolt-on / module	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	up to 150 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP		

Spectra SF (SFHA/SFLA/SFPA) BRK-GEA-007 · GE / ABB lineage · aka SF-frame

Mounting	bolt-on / module	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	70-250 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR		

Spectra SG (SGDA/SGHA/SGLA/SGPA) BRK-GEA-008 · GE / ABB lineage · aka SG-frame

Mounting	bolt-on / module	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	125-600 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, SCP-PLUS		

Spectra SK (SKHA/SKLA/SKPA) BRK-GEA-009 · GE / ABB lineage · aka K, SK-frame

Mounting	single-mounted / center-mounted	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	800-1200 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, SCP-PLUS, CCB-QMR		

TEB / TED / THED / TED4 / TED6 BRK-GEA-005 · GE / ABB lineage · aka E-frame, EB

Mounting	bolt-on	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	15-150 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR, NHB		

TEY / TEYF / TEYD / TEYH / TEYL BRK-GEA-003 · GE / ABB lineage · aka E-frame TEY, EY

Mounting	bolt-on (AE/AEP; Spectra double-branch; ReliaGear neXT)	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A (110/125 A TEYD/H/L in AS)	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, RG-NEXT		

TFJ / TFK / THFK / TFL BRK-GEA-013 · GE / ABB lineage · aka F-frame, FJ

Mounting	bolt-on / module	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	up to 225 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, CCB-QMR		

THQB / THHQB / TXQB BRK-GEA-001 · GE / ABB lineage · aka Q-line bolt-on, QB

Mounting	bolt-on (A-Series AQ; Spectra double-branch)	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A, 1-3P	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP		

THQL / THHQL / TXQL BRK-GEA-002 · GE / ABB lineage · aka Q-line plug-in

Mounting	plug-in (A-Series AL)	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A	A	same as above
Used in	A-SERIES		

TJD / TJJ / TJK / THJK BRK-GEA-014 · GE / ABB lineage · aka J-frame, JK

Mounting	bolt-on / module	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	250-600 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, SCP-PLUS, CCB-QMR		

TKM / THKM BRK-GEA-015 · GE / ABB lineage · aka K-frame, KM

Mounting	single-mounted	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	800-1200 A	A	same as above
Used in	SPECTRA-PP, CCB-QMR		

TQD / THQD BRK-GEA-004 · GE / ABB lineage · aka Q-frame QD

Mounting	bolt-on via strap kits / branch bases	A	S143 p.11-4 to 11-7; oem_spec
Ampere range	100-225 A, 2-3P	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR		

TQD / THQD (Q-Line 225A) BRK-GEA-016 · GE / ABB lineage · aka TQD, THQD, TQC 70-100A

Breaker frame	Q-Line 225 A	A	S198 p. 6-102; oem_spec

Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) BRK-OTH-002 · Other manufacturers · aka UBIF, UBI-F, Unique Breakers Inc UBIF

Mounting	Plug-in for use in Federal Pacific load centers (NA thick, NC thin series); bolt-on NB variants (UBIF...NB) referenced by resellers	C	S615, S616, S209 distributor
Ampere range	1-pole 15-50 A; 2-pole 15-70 A (per 2005 sheet)	C	S615 p. 2; distributor
Voltage rating	120 V (1P), 120/240 V (2P)	C	same as above
Interrupting ratings	10,000 A RMS sym max	C	same as above
Status	current (aftermarket, newly manufactured)	C	S616 distributor
Listing / approvals	Seller states: 'Meet or exceed ANSI/UL 489 Standard'; 'tested and certified in accordance with the National Electric Code and conform to the ANSI/UL Standard 489, 9th Edition'; marked 'Unique Breakers, Inc.' Distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.' (seller claim; the UBI sheet itself does not use the word 'classified')	C	S615, S616 p. 1-2; distributor
Cross reference	UBIF0xxN = FPE NC one/two-pole thin series; UBIFxxN / UBIF2xxN = FPE NA one/two-pole thick series (table 'Corresponds to') (seller cross-reference)	C	S615 p. 2; distributor

Connecticut Electric UBIP (UBI replacement for Pushmatic) BRK-OTH-003 · Other manufacturers · aka UBIP, Unique Breakers Inc UBIP

Mounting	Bolt-on for use in Pushmatic and Bulldog load centers	C	S617 distributor
Ampere range	1-pole 15-30 A; 2-pole 15-100 A; twin 15/15, 15/20, 20/20	C	S615 p. 2; distributor
Interrupting ratings	10,000 A RMS sym max	C	same as above
Listing / approvals	Distributor: 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'; maker sheet: conform to ANSI/UL 489 (seller claim)	C	S617, S615 distributor
Used in	PUSHMATIC		

Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) BRK-OTH-004 · Other manufacturers · aka UBIZ, Unique Breakers Inc UBIZ

Mounting	Plug-in for use in Zinsco load centers	C	S615 distributor
Ampere range	Q 1-pole 15-30 A; QC 2-pole 20-125 A; R twin 15/15-30/30; RC 2-pole 20-60 A	C	S615 p. 2; distributor
Interrupting ratings	10,000 A RMS sym max	C	same as above
Cross reference	UBIZ15/20/30 = Zinsco Q15/Q20/Q30; UBIZ220-2100 = QC20-QC50, QCAL60-QCAL100; UBIZ2125 = QCAL125; UBIZ1515/1520/2020/3030 = R3815/R381520/R3820/R3830; UBIZ0220-0260 = RC3820-RC3860 (seller cross-reference)	C	same as above
Used in	ZIN-Q		

Wadsworth A / B series BRK-OTH-001 · Other manufacturers · aka A15NI, A360, B1515

Mounting	plug-in (assumed)	C	S240, S229 distributor
Ampere range	15-90 A	C	same as above
Voltage rating	120/240 V (3-pole versions exist)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Used in	WADSWORTH		

3VA41 BRK-SIE-004 · Siemens lineage · aka 3VA41

Breaker frame	1in per pole (1-pole 1in wide; 2P 2in; 3P 3in)	A	S165 pp.11-18, 11-19; oem_spec
Ampere range	15-125A	A	S165 p.11-18; oem_spec
Interrupting ratings	SEAB/MEAB/HEAB: 25/35/65kA @277V-480Y/277V	A	S165 pp.11-18, 11-19; oem_spec
Used in	RP1, P2, P3, P4, P5, SB		

3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)

BRK-SIE-012 · Siemens lineage · aka 3VA52, 3VA53, 3VA54, 3VA61, 3VA62, 3VA63, 3VA64

Used in	RP1, P2, P3, P4, P5, SB		

BL BRK-SIE-001 · Siemens lineage · aka BAF, BL, BLE, BLF, BLH, BT twin (B1515/B2020), HBL

Mounting	bolt-on	A	S165 p.11-16; oem_spec
Breaker frame	1in per pole bolt-on	A	same as above
Ampere range	15-100A	A	same as above
Voltage rating	120/240V	A	same as above
Interrupting ratings	BL 10kA, BLH 22kA, HBL 65kA	A	same as above
Used in	RP1, P1, S1/S2, P2, P3, P4, P5, SB		

BQ / BQH / HBQ (bolt-on, legacy) BRK-SIE-015 · Siemens lineage · aka BQ, BQH, HBQ, HB

Status	unknown	D	S165 inference
Used in	CDP6, SB		

BQ / BQH / HBQ / BQXD bolt-on BRK-SIE-016 · Siemens lineage · aka BL, BLH, BQ, BQE, BQF, BQH, BQHF, BQXD, HBL, HBQ

Ampere range	15-125 A	A	S203 p. 7-39, 7-153; oem_spec

BQD BRK-SIE-002 · Siemens lineage · aka BQD, BQD6

Mounting	bolt-on, 1in per pole	A	S165 p.11-16; oem_spec
Ampere range	15-100A	A	same as above
Voltage rating	480Y/277V	A	same as above
Interrupting ratings	14kA @480Y/277V, 65kA @240V	A	same as above
Used in	RP1, P1, P2, P3, P4, P5, SB		

BQD / CQD (incl. BQD6, CQD6) BRK-SIE-017 · Siemens lineage · aka BQD, BQD6, CQD, CQD6

Ampere range	15-100 A	A	S203 p. 7-153; oem_spec
Note	SPEEDFAX p. 7-153 says the lugs are integral (line and load for BQD; line side for CQD/CQD6, load side for both). No separate lug kit is listed.	A	same as above

ED (ED2/ED4/ED6/HED4/HHED6) and CED6 BRK-SIE-005 · Siemens lineage · aka ED2, ED4, ED6, HED4, HED6, HHED6, CED6, E2, E4, E6, HE4, HE6

Ampere range	15-125A	A	S165 p.11-94; oem_spec
Used in	RP1, P1, S1/S2, P2, P4, P5, SB, CDP6		

FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) BRK-SIE-008 · Siemens lineage · aka FXD6, FD6, HFD6, HFXD6, HHFD6, HHFXD6, CFD6

Ampere range	70-250A	A	S165 p.11-94; oem_spec
Used in	RP1, P1, S1/S2, P4, P5, SB, CDP6		

GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' BRK-SIE-003 · Siemens lineage · aka HGB, HGB2, LGB, LGB2, NGB, NGB2, xGB, xGB2

Ampere range	15-125A	A	S165 p.11-16; oem_spec
Voltage rating	480Y/277V; 600Y/347V 14kA	A	same as above
Interrupting ratings	NGB 25kA, HGB 35kA, LGB 65kA @480Y/277V; 100kA @240V	A	same as above
Used in	RP1, P2, P3, P4, P5		

ITE BQ / BQH / HBQ bolt-on (Canada) BRK-SIE-031 · Siemens lineage · aka BQ, BQH, HBQ

Mounting	Bolt-on	C	S439 distributor
Used in	NLAB		

ITE EE / EH / EF / HE breakers BRK-SIE-032 · Siemens lineage · aka EE, EH, EF, HE

Ampere range	150 A frame (kit max)	C	S444 surplus_listing
Used in	CDP6		

ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers BRK-SIE-033 · Siemens lineage · aka FJ3, JJ3, JD3, JL3, HJ3

Ampere range	FJ3 225 A; J-frame 400 A (kit max)	C	S444 surplus_listing
Used in	CDP6, CDP-ITE		

JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) BRK-SIE-009 · Siemens lineage · aka JXD2, JXD6, JD6, HJD6, HJXD6, HHJXD6, CJD6, SJD6, SHJD6, SCJD6

Ampere range	200-400A	A	S165 p.11-95; oem_spec
Used in	RP1, P1, S1/S2, P4, P5, SB, CDP6		

LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) BRK-SIE-010 · Siemens lineage · aka LXD6, LD6, HLD6, HLXD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6

Ampere range	250-600A	A	S165 p.11-95; oem_spec
Used in	P4, P5, SB, CDP6		

MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 BRK-SIE-011 · Siemens lineage · aka MXD6, MD6, HMD6, CMD6, SMD6, SHMD6, SCMD6, NXD6, ND6, HND6, CND6, SND6, SHND6, SCND6, LMD6, HLMD6

Ampere range	MD to 800A, ND to 1200A (Frame ratings from strap kit table max-amp column)	B	S165 inference
Used in	P5, SB, CDP6		

NEB / HEB BRK-SIE-014 · Siemens lineage · aka NEB, HEB

Status	legacy (replacement parts only)	B	S165 p.11-53; inference
Used in	P3, P4, P5		

NGG / HGG / LGG (G-frame bolt-on/lug) BRK-SIE-018 · Siemens lineage · aka HGG, LGG, NGG

Ampere range	15-125 A	A	S203 p. 7-153; oem_spec

Pushmatic (Bulldog / ITE) BRK-SIE-030 · Siemens lineage · aka P-series, P1515 (condensed dual 15 A), UBIP (Connecticut Electric replacement)

Mounting	bolt-on push-button	C	S244, S223 distributor
Ampere range	15-? A (UBIP replacements 15-40+ A)	C	same as above
Voltage rating	120 / 120/240 V	C	same as above
Interrupting ratings	10 kA (UBIP)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Aftermarket / reproduction	Connecticut Electric UBIP115, UBIP130, UBIP240 etc. classified for Pushmatic and Bulldog loadcenters	C	S223 distributor
Used in	PUSHMATIC		

QJ2 / QJH2 / QJ2-H / HQJ2H BRK-SIE-006 · Siemens lineage · aka QJ2, QJH2, QJ2-H, HQJ2H

Ampere range	60-225A	A	S168 p.10-18; oem_spec
Status	discontinued; replaced by QR (QJ kits not available, use QR)	A	S165 p.11-53; oem_spec
Used in	P1, P2, P3, CDP6		

QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) BRK-SIE-020 · Siemens lineage · aka HQJ2H, QJ2, QJ2H, QJH2

Ampere range	60-225 A (from a superbreakers.com search snippet; not OEM-verified)	C	S205 distributor

QR2 / QRH2 / HQR2 (250A frame) BRK-SIE-019 · Siemens lineage · aka HQR2, HQR2H, QR2, QR2H, QRH2

Ampere range	100-250 A	A	S203 p. 7-40; oem_spec
Voltage rating	240 Vac	A	same as above

QR2 / QRH2 / HQR2 / HQR2H BRK-SIE-007 · Siemens lineage · aka QR, QR2, QRH2, HQR2, HQR2H

Ampere range	100-225A (QR rated 250A frame but limited to 225A in panelboard)	A	S165 pp.11-94, 11-96; oem_spec
Voltage rating	240V max	A	S170 oem_spec
Used in	RP1, P1, P2, P3, P4, P5, SB		

Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) BRK-SIE-021 · Siemens lineage · aka CED6, ED, ED2, ED4, ED6, HED4, HHED6

Ampere range	15-125 A	A	S203 ED pages; p. 7-154; oem_spec

Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) BRK-SIE-022 · Siemens lineage · aka CFD6, FD6, FXD6, HFD6, HFXD6, HHFD6, HHFXD6

Ampere range	70-250 A	A	S203 FD pages; p. 7-154; oem_spec

Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) BRK-SIE-023 · Siemens lineage · aka CJD6, HHJD6, HHJXD6, HJD6, HJXD6, JD6, JXD2, JXD6, SCJD6-B, SHJD6-B, SJD6-B

Ampere range	200-400 A	A	S203 p. 7-154; oem_spec

Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) BRK-SIE-024 · Siemens lineage · aka CLD6, HHLD6, HHLXD6, HLD6, HLXD6, LD6, LXD6, SCLD6-B, SHLD6-B, SLD6-B

Ampere range	250-600 A	A	S203 p. 7-154; oem_spec

Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) BRK-SIE-025 · Siemens lineage · aka HLMD6, HLMXD6, LMD6, LMXD6

Ampere range	500-800 A	A	S203 p. 7-154, 7-165; oem_spec

Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) BRK-SIE-026 · Siemens lineage · aka CMD6, HMD6, HMXD6, MD6, MXD6, SCMD6-B, SHMD6-B, SMD6-B

Ampere range	500-800 A	A	S203 p. 7-154; oem_spec

Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) BRK-SIE-027 · Siemens lineage · aka CND6, HND6, HNXD6, ND6, NXD6, SCND6-B, SHND6-B, SND6-B

Ampere range	800-1200 A	A	S203 p. 7-154; oem_spec

Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) BRK-SIE-028 · Siemens lineage · aka CPD6, HPD6, HPXD6, PD6, PXD6, SHPD6-B, SPD6-B

Ampere range	1200-1600 A	A	S203 p. 7-154; oem_spec

Sentron RD (RD6, RXD6, HRD6, HRXD6) BRK-SIE-029 · Siemens lineage · aka HRD6, HRXD6, RD6, RXD6

Ampere range	1600-2000 A	A	S203 p. 7-154 to 7-155; oem_spec

Sentron VL (DG, FG, JG, LG, MG, NG) BRK-SIE-013 · Siemens lineage · aka DG, FG, JG, LG, MG, NF/HF/LF, NG, NJ/HJ/LJ, NL/HL/LL, NM/HM/LM

Used in	P4, P5		

EDB / EGB / EJB (E-frame bolt-on) BRK-SQD-003 · Square D / Schneider Electric · aka ED, EDB EPD, EG, EJ

Mounting	bolt-on to NF branch connectors; EDB 3P 125 A can be back-fed as main with NFEDBS	A	S27 p. 9-31, 9-32; oem_spec
Poles	1, 2, 3	A	S27 p. 9-32; oem_spec
Ampere range	15-70 A (1P), 15-125 A (2P/3P)	A	same as above
Voltage rating	480Y/277 Vac (US); 600Y/347 Vac versions via se.com/ca	A	same as above
Interrupting ratings	EDB 18 kA, EGB 35 kA, EJB 65 kA @ 480Y/277 V	A	same as above
Status	current	A	S27 oem_spec
Used in	NF		

EH / EHB BRK-SQD-004 · Square D / Schneider Electric · aka EH plug-on, EHB bolt-on

Mounting	EH plug-on; EHB bolt-on	A	S87 oem_spec
Status	obsolete / no longer available	C	S91 oem_spec
Used in	NEHB		

FA / FH (I-Line) BRK-SQD-013 · Square D / Schneider Electric · aka FA, FA 240V, FA 480V, FH, FY

Mounting	I-Line plug-on (bolt-on version factory-only: 3rd character 'B')	A	S95, S94, S105 s2 p. 8; s1 p. 22; oem_spec
Breaker frame	100 A	A	same as above
Poles	1 (277 V), 2, 3	A	same as above
Ampere range	15-100 A	A	same as above
Voltage rating	240/480/600 V	A	same as above
Interrupting ratings	FA 240V 10k@240; FA 480V 25k@240/18k@480; FH 65k@240/25k@480/18k@600	A	same as above
Group mount height	1.5 in. (1-pole); 3 in. (multi-pole) in QED-2 I-Line (Column alignment from text extraction; verify visually)	B	S94 p. 22; oem_spec
Bolt on	Bolt-on construction available only for FA/FH, LA/LH, FY, QB, QD, QG, Q4 (factory order; bus clamps torque 20 lb-in / 3 N-m)	A	S105 oem_spec
Used in	I-LINE, QED-2		

FI frame (legacy) BRK-SQD-011 · Square D / Schneider Electric · aka FI

Breaker frame	F (100 A)	A	S62 oem_spec
Used in	NF		

H-frame HD/HG/HJ/HL/HR (I-Line) BRK-SQD-014 · Square D / Schneider Electric · aka HD, HG, HJ, HL, HR, PowerPact H

Mounting	I-Line plug-on	A	S95 p. 8; oem_spec
Breaker frame	150 A	A	same as above
Poles	2, 3 (HR 3)	A	same as above
Ampere range	15-150 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	HD 25k@240/18k@480; HG 65/35; HJ 100/65; HL 125/100; HR 200/200	A	same as above
Group mount height	4.5 in. (2- and 3-pole)	A	S94 p. 22; oem_spec
Class	Class 611	A	S95 p. 10; oem_spec
Used in	QED-2, I-LINE		

I-Limiter FI / KI / LI (I-Line) BRK-SQD-019 · Square D / Schneider Electric · aka FI, KI, LI, I-Limiter

Mounting	I-Line plug-on	A	S94 p. 22; oem_spec
Breaker frame	FI 100 A; KI 250 A; LI 600 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	FI 20-100 A; KI 110-250 A; LI 300-600 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	200k@240/200k@480/100k@600	A	same as above
Group mount height	FI 4.5 in.; KI 4.5 in.; LI 7.5 in.	A	same as above
Swap fillers	Replacing an LI with a KI requires (1) HLW4BL plus HNM1BL and HLW1BL fillers	A	S102 oem_spec
Used in	QED-2, I-LINE		

J-frame JD/JG/JJ/JL/JR (I-Line) BRK-SQD-016 · Square D / Schneider Electric · aka JD, JG, JJ, JL, JR, PowerPact J

Mounting	I-Line plug-on	A	S95 p. 8; oem_spec
Breaker frame	250 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	150-250 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	JD 25k@240/18k@480; JG 65/35; JJ 100/65; JL 125/100; JR 200/200	A	same as above
Group mount height	4.5 in.	A	S94 p. 22; oem_spec
Class	Class 611	A	S95 p. 10; oem_spec
Used in	QED-2, I-LINE		

KI / KC frame (legacy) BRK-SQD-010 · Square D / Schneider Electric · aka KI, KC, N250MKC

Breaker frame	K (225/250 A)	A	S38 oem_spec
Status	legacy (kits dated 2008-2009)	C	S38 inference
Used in	NQ, NF, NQOD		

LA / LH (I-Line) BRK-SQD-017 · Square D / Schneider Electric · aka LA, LAL, LH, LHL

Mounting	I-Line plug-on (bolt-on factory option)	A	S95 p. 8; oem_spec
Breaker frame	400 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	125-400 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	LA 42k@240/30k@480/22k@600; LH 65/35/25	A	same as above
Group mount height	6 in. (2- and 3-pole)	A	S94 p. 22; oem_spec
Class	Class 660	A	S95 p. 10; oem_spec
Used in	I-LINE, QED-2		

LA / LH (L-frame, legacy thermal-magnetic) BRK-SQD-008 · Square D / Schneider Electric · aka LAL, LAL36400MB, LHL

Mounting	NQMB4LA / N400M; order short-handle breaker (e.g. LAL36400MB)	A	S27 p. 9-9 fn; oem_spec
Breaker frame	LA/LH 125-400 A	A	S27 p. 9-9; oem_spec
Used in	NQ, NF, I-LINE		

LC (I-Line, 600 A) BRK-SQD-018 · Square D / Schneider Electric · aka LC

Mounting	I-Line plug-on	A	S94 p. 22; oem_spec
Breaker frame	600 A	A	same as above
Poles	3	A	same as above
Ampere range	300-600 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	100k@240/65k@480/35k@600	A	same as above
Group mount height	7.5 in.	A	same as above
Used in	QED-2		

M-frame MG/MJ (I-Line) BRK-SQD-021 · Square D / Schneider Electric · aka MG, MJ, PowerPact M

Mounting	I-Line plug-on	A	S95 p. 8; oem_spec
Breaker frame	800 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	300-800 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	MG 65k@240/35k@480/18k@600; MJ 100/65/25	A	same as above
Group mount height	9 in. (per QED-2 table, shared with P-frame row) (Column alignment in text extraction ambiguous)	C	S94 p. 22; oem_spec
Class	Class 612	A	S95 p. 10; oem_spec
Used in	I-LINE, QED-2		

P-frame PG/PJ/PK/PL (I-Line) BRK-SQD-022 · Square D / Schneider Electric · aka PG, PG-C, PJ, PJ-C, PK, PK-C, PL, PL-C, PowerPact P

Mounting	I-Line plug-on	A	S95, S94 s2 p. 8; s1 p. 22; oem_spec
Breaker frame	1200 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	100-1200 A (catalog 600-1200 A in 2110CT9701)	A	same as above
Voltage rating	600 V (PL 480 V)	A	same as above
Interrupting ratings	PG 65k@240/35k@480; PJ 100/65; PK 65/50/50 (Canada); PL 125/100	A	same as above
Group mount height	9 in. (2-/3-pole)	A	S94 p. 22; oem_spec
Note 100pct	Cannot group mount 100% rated 1000 A and 1200 A P-frame; use R-frame	A	same as above
Used in	I-LINE, QED-2		

PowerPacT H-frame (HD/HG/HJ/HL/HR) BRK-SQD-006 · Square D / Schneider Electric · aka HDL, HGL, HJL, HLL, HRL

Mounting	NQ/NF vertical main or sub-feed via adapter kit; terminal kit S37444 with hard-bus connectors	A	S37, S61 oem_spec
Breaker frame	H (150 A max)	A	S37 oem_spec
Used in	NQ, NF, I-LINE		

PowerPacT J-frame (JD/JG/JJ/JL/JR) BRK-SQD-007 · Square D / Schneider Electric · aka JDL, JGL, JJL, JLL, JRL

Mounting	NQ/NF vertical main or sub-feed via adapter kit; terminal kit S37445	A	S37, S61 oem_spec
Breaker frame	J (250 A max)	A	S37 oem_spec
Used in	NQ, NF, I-LINE		

PowerPacT L-frame (LG/LJ/LL/LR) BRK-SQD-009 · Square D / Schneider Electric · aka PPL

Mounting	NQMB6PPL / N600MPPL kits; requires 8.75 in. deep D9 boxes; M10x25 connector screws 442 lb-in	A	S27, S80 oem_spec
Breaker frame	L 125-600 A	A	S27 oem_spec
Used in	NQ, NF, I-LINE		

PowerPacT M / P / R frame (I-Line) BRK-SQD-012 · Square D / Schneider Electric · aka MG, MJ, PG, PJ, PK, PL, RG, RJ, RK, RL

Breaker frame	M 800 A, P up to 1200 A, R 1200 A (Ampacity limits inferred from I-Line sub-feed table)	B	S27 oem_spec
Used in	I-LINE, NF		

PowerPacT Q-frame (QB/QD/QG/QJ) BRK-SQD-005 · Square D / Schneider Electric · aka QBL, QDL, QGL, QJL

Mounting	in NQ: vertical main/sub-feed on adapter pan (NQMB2Q/NQSFB2Q) with lug wires; I-Line plug-on in HCJ	A	S27, S35 p. 9-9; oem_spec
Breaker frame	Q	A	S27 oem_spec
Used in	NQ, I-LINE		

PowerPact B-frame BD/BG/BJ/BK (I-Line) BRK-SQD-024 · Square D / Schneider Electric · aka BD, BG, BJ, BK, PowerPact B

Mounting	I-Line plug-on	A	S95 p. 8; oem_spec
Breaker frame	125 A	A	same as above
Poles	1, 2, 3 (BK 1, 2)	A	same as above
Ampere range	15-125 A (BK 15-30 A)	A	same as above
Voltage rating	600Y/347 V	A	same as above
Interrupting ratings	BD 25k@240/18k@480; BG 65/35; BJ 100/65; BK 100/65/65	A	same as above
Used in	I-LINE		

PowerPact L-frame LD/LG/LJ/LL/LR (I-Line) BRK-SQD-020 · Square D / Schneider Electric · aka LD, LG, LJ, LL, LR, PowerPact L

Mounting	I-Line plug-on	A	S95 p. 8; oem_spec
Breaker frame	600 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	250-600 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	LD 25k@240/18k@480; LG 65/35; LJ 100/65; LL 125/100; LR 200/200	A	same as above
Mount screw	No orderable mounting screw for L-frame in I-Line; a 10-32 x 5/8 screw can be used	A	S108 oem_spec
Used in	I-LINE, QED-2		

Q-frame QB/QD/QG/QJ (I-Line) BRK-SQD-015 · Square D / Schneider Electric · aka QB, QD, QG, QJ, Q2, Q4

Mounting	I-Line plug-on	A	S95 p. 8; oem_spec
Breaker frame	225 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	70-225 A	A	same as above
Voltage rating	240 V	A	same as above
Interrupting ratings	QB 10k, QD 25k, QG 65k, QJ 100k @240 V	A	same as above
Group mount height	3 in. (single value printed in the mounting-height columns for QB/QD/QG/QJ) (Text extraction column alignment ambiguous; which pole columns the 3 in. applies to needs PDF visual check)	C	S94 p. 22; oem_spec
Class	Class 734	A	S95 p. 10; oem_spec
Used in	QED-2, I-LINE		

QMB circuit breaker units (H-, J-, L-frame) BRK-SQD-025 · Square D / Schneider Electric · aka QMB breaker unit, QMB3400LA

Mounting	QMB plug-on unit with permanently attached mounting brackets	A	S96 pp. 17-18; oem_spec
Breaker frame	Twin H-frame HD/HG 15-150 A; single JD/JG 150-250 A; single LA/LH 225-400 A	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Interrupting ratings	HD 25k@240/18k@480/14k@600; HG 65/35/18; JD 25/18/14; JG 65/35/18; LA 42/30/22; LH 65/35/25	A	same as above
Used in	QMB, QED-2		

QO (plug-on) BRK-SQD-001 · Square D / Schneider Electric · aka QO-H, QO-VH, QOH

Mounting	plug-on	A	S27 p. 9-9; oem_spec
Voltage rating	120/240 Vac; 48 Vdc where DC rated	A	same as above
Status	current	A	S27 oem_spec
Used in	NQ, NQOD		

QOB (bolt-on) BRK-SQD-002 · Square D / Schneider Electric · aka QOB-H, QOB-HID, QOB-VH

Mounting	bolt-on to NQ branch connectors; may also be used back-fed as 100-150 A main	A	S27 p. 9-9; oem_spec
Status	current	A	S27 oem_spec
Used in	NQ, NQOD		

R-frame RG/RJ/RK/RL (I-Line) BRK-SQD-023 · Square D / Schneider Electric · aka PowerPact R, RG, RG-C, RJ, RJ-C, RK, RK-C, RL, RL-C

Mounting	I-Line plug-on	A	S95, S94 s2 p. 9; s1 p. 22; oem_spec
Breaker frame	1200 A (2500 A frame per QED-2 table)	A	same as above
Poles	2, 3	A	same as above
Ampere range	1000-1200 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	RG 65k@240/35k@480; RJ 100/65; RK 65/65/65 (Canada); RL 125/100/50	A	same as above
Group mount height	15 in.	A	S94 p. 22; oem_spec
Used in	I-LINE, QED-2		

Square D EH / EHB (NEHB) BRK-SQD-041 · Square D / Schneider Electric · aka EH, EHB

Status	Discontinued, no replacement (search summary)	C	S459 oem_web
Used in	NEHB		

Square D FA/FH/FC/FI (F-frame 100/150 A) BRK-SQD-026 · Square D / Schneider Electric · aka FA, FAL, FC, FCL, FH, FHL, FI, FY

Breaker frame	F-Frame (FA family)	A	S182 p.3-28; oem_spec
Ampere range	15-150 A	A	same as above
Note	FY not listed in the lug tables found; alias recorded for search only.	A	same as above

Square D KA/KH/KC/KI (K-frame 250 A) BRK-SQD-027 · Square D / Schneider Electric · aka KA, KAL, KC, KH, KHL, KI, KIL

Breaker frame	K-Frame (KA family)	A	S182 p.3-28; oem_spec
Ampere range	110-250 A	A	same as above

Square D LA/LH (L-frame 400 A) BRK-SQD-028 · Square D / Schneider Electric · aka LA, LAL, LH, LHL

Breaker frame	L-Frame (LA family)	A	S182 p.3-28; oem_spec
Ampere range	125-400 A	A	same as above

Square D LC/LI/LE/LX/LXI (L-frame 600 A) BRK-SQD-030 · Square D / Schneider Electric · aka LC, LE, LI, LX, LXI

Breaker frame	L-Frame (LI family)	A	S182 p.3-28; oem_spec
Ampere range	100-600 A	A	same as above

Square D MA/MH/MX/ME (M-frame 1000 A) BRK-SQD-031 · Square D / Schneider Electric · aka MA, MH, MX, ME

Breaker frame	M-Frame (MA family)	A	S182 p.3-17; oem_spec
Ampere range	up to 1000 A	A	same as above
Note	Only control-wire tapped lugs AL900MAT/AL1000MAT found; standard MA lug kits not located (lead).	A	same as above

Square D ML breakers (MLN panels) BRK-SQD-042 · Square D / Schneider Electric · aka ML, ML-1

Status	Obsolete	A	S456 oem_web
Used in	MLN, NEHB		

Square D NA/NC/NX/NE (N-frame 1200 A) BRK-SQD-032 · Square D / Schneider Electric · aka NA, NC, NX, NE

Breaker frame	N-Frame (NA family)	A	S182 p.3-17; oem_spec
Ampere range	up to 1200 A	A	same as above

Square D PowerPact D-Frame (DG/DJ/DL) BRK-SQD-039 · Square D / Schneider Electric · aka DG, DJ, DL

Breaker frame	PowerPact D	A	S182 p.3-28; oem_spec
Ampere range	150-600 A	A	same as above

Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) BRK-SQD-033 · Square D / Schneider Electric · aka HD, HDA, HDL, HG, HGL, HJ, HJL, HL, HLL, HR, HRL

Breaker frame	PowerPact H	A	S180 p.124; oem_spec
Ampere range	15-150 A	A	same as above

Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) BRK-SQD-034 · Square D / Schneider Electric · aka JD, JDA, JDL, JG, JGL, JJ, JJL, JL, JLL, JR, JRL

Breaker frame	PowerPact J	A	S180 p.124; oem_spec
Ampere range	150-250 A	A	same as above

Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) BRK-SQD-035 · Square D / Schneider Electric · aka LD, LDL, LG, LGA, LGL, LJ, LJL, LL, LLL, LR, LRL

Breaker frame	PowerPact L	A	S180 p.124; oem_spec
Ampere range	250-600 A	A	same as above

Square D PowerPact M-Frame (MG/MJ) BRK-SQD-036 · Square D / Schneider Electric · aka MG, MJ

Breaker frame	PowerPact M	A	S182 p.3-17; oem_spec
Ampere range	up to 800 A	A	same as above

Square D PowerPact P-Frame (PG/PJ/PL) BRK-SQD-037 · Square D / Schneider Electric · aka PG, PJ, PL

Breaker frame	PowerPact P	A	S182 p.3-17; oem_spec
Ampere range	up to 1200 A	A	same as above

Square D PowerPact R-Frame (RG/RJ/RL) BRK-SQD-038 · Square D / Schneider Electric · aka RG, RJ, RL

Breaker frame	PowerPact R	A	S182 p.3-17; oem_spec
Ampere range	up to 3000 A (1200 A tapped lug listed)	A	same as above

Square D Q4 (400 A, LA-type lugs) BRK-SQD-029 · Square D / Schneider Electric · aka Q4, Q4L

Breaker frame	Q4	A	S182 p.3-28; oem_spec
Ampere range	125-400 A	A	same as above

Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB BRK-SQD-040 · Square D / Schneider Electric · aka Q1, Q1B, QO, QOB

Mounting	QO plug-on (NQO), QOB bolt-on (NQOB)	A	S437, S438 oem_spec
Ampere range	1P 15-50 A, 2P 15-70 A and 70-100 A, 3P 15-50 A and 70-100 A (1960)	A	S437 oem_spec
Voltage rating	AC only in NQO/NQOB (1960)	A	S438 oem_spec
Used in	NQOB		

Square D Y1B 1-pole (NY1B) BRK-SQD-043 · Square D / Schneider Electric · aka Y1B

Ampere range	1-pole 15-50 A	A	S457 oem_web
Status	Obsolete and no longer available	A	same as above
Used in	NEHB		

Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) BRK-ZIN-003 · Zinsco / Sylvania · aka SE, SEH, SF, SJD, SJK, SKM, Challenger SF

Mounting	bolt-on	C	S221, S233 distributor
Ampere range	15-800 A (SEH to 100 A; SF to 175 A; SJK 250-600 A; SKM 800 A)	C	same as above
Voltage rating	240/480/600 V	C	same as above
Interrupting ratings	SEH 18 kA@240/14 kA@480; SF 25 kA@480; SJK 30 kA@480 (listings)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Cross ref	Superbreakers lists SEH as fitting Eaton F-frame, Sylvania, Challenger and Westinghouse panelboards and crosses to Eaton EHD - sales claim only	D	S221 distributor
Used in	ZIN-DIST, CHA-PM4		

Zinsco / Sylvania QSF fusible panelboard switch BRK-ZIN-002 · Zinsco / Sylvania · aka QSF, QSF-T (twin), QSF-xx33 (240 V), QSF-xx53 (600 V)

Mounting	bolt-on panel mounted switch unit	C	S221, S242, S225 distributor
Ampere range	30-600 A	C	same as above
Voltage rating	240 V / 600 V	C	same as above
Interrupting ratings	200 kA (with RK1/RK5 fuses)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Numbering	Pattern appears to be QSF-<amp code: T3/T6 twin 30/60 A, 10=100, 20=200, 40=400, 60=600><3 poles><3=240 V, 5=600 V>	D	S221, S242 inference
Used in	ZIN-DIST, FA		

Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) BRK-ZIN-001 · Zinsco / Sylvania · aka Q, QC, QCN, Q24, QB, QCB, QCAL, QFP, QFL, QFB, QFBL, R38, RC38, Magnatrip, UBIZ (Connecticut Electric replacement)

Mounting	plug-in (Q/QC/R38, QFP mains) and bolt-on (QB/QCB/QFB) onto on-edge flat bus	C	S221, S220, S219 distributor
Ampere range	15-225 A	C	same as above
Voltage rating	120/240 V; 240 V 3-ph (Q24, QFP24, QB243xxx)	C	same as above
Interrupting ratings	10 kA (QFP24125, QCB30, QFL23225 listings)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Aftermarket / reproduction	Connecticut Electric UBIZ series (e.g., UBIZ2100 = QCAL100; UBIZ3150 = QFP24150; UBITBFP2002 = QFP2200T/QFBL2200; UBIZ243040 = QB243040)	C	S221, S223 distributor
Used in	ZIN-Q, ZIN-DIST		

11 Cross-Reference Tables

11.1 Supersession and alternate numbers

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
0080429	alias	K80429	EDH-EAT-00408	B	273
11-5068-05	alias	6CLE2	EDH-SIE-00155	A	1563
11-D-4554-01	alias	DFFP1A	EDH-SIE-00062	A	1672
11-D-4560-01	supersedes	DFFP01B	EDH-SIE-00064	A	1671
12-1800-01	alias	DFFP1A	EDH-SIE-00062	A	1672
12-1800-01	alias	QF3	EDH-SIE-00063	C	1482
12-5719-01	alias	6CLJ1	EDH-SIE-00194	A	1722
12-5720-01	alias	6CLL1	EDH-SIE-00198	A	1724
12-5771-01	alias	6SCJ1	EDH-SIE-00196	A	1726
12-5772-01	alias	6SCL1	EDH-SIE-00200	A	1727
12-A-1801-01	supersedes	DFFP01B	EDH-SIE-00064	A	1671
12-A-1802-01	supersedes	DFFPVA41A	EDH-SIE-00066	A	1678
12-A-1802-01	alias	DFFPED01	EDH-SIE-00069	A	1673
12-A-1803-01	alias	DFFPFD01	EDH-SIE-00070	A	1674
12-A-1804-01	alias	DFFPQJ01	EDH-SIE-00073	A	1676
12-A-1804-02	alias	DFFPQJ02	EDH-SIE-00074	A	1677
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	1C96619	EDH-EAT-00250	A	246
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	1C96620	EDH-EAT-00251	A	246
1C96608G01..G63 (odd item numbers)	style_number	1C96608	EDH-EAT-00163	A	235
1C96609G01..G63 (same G scheme as 1C96608)	style_number	1C96609	EDH-EAT-00165	A	319
1C96647	supersedes	42C4050	EDH-EAT-00222	B	240
1C96650	supersedes	42C4051	EDH-EAT-00226	B	241
1C96653	supersedes	42C4052	EDH-EAT-00230	B	241
1X H01; 2X H02; 3X H03; 4X H13; 5X H14; 6X H04; 7X H05; 9X H06; 10X H07; 11X H08; 12X H09; 13X H10; 15X H11; 20X H12	style_number	6554C01	EDH-EAT-00294	A	472
225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	style_number	1C96652	EDH-EAT-00229	A	239
252B3638G1-G2	style_number	252B3638	EDH-GEA-00540	A	1215
252B3638G3-G8	style_number	252B3638	EDH-GEA-00540	A	1215
252B3638G9-G10	style_number	252B3638	EDH-GEA-00540	A	1215
2C11642G03, G07, G11, G15 ... G59, G63 (silver-plated copper only)	style_number	2C11642	EDH-EAT-00164	A	236
2NLK30A	supersedes	2NLK42B	EDH-SIE-00040	A	1638
2NLK42A	supersedes	2NLK42B	EDH-SIE-00040	A	1638
2NLK54A	supersedes	2NLK54B	EDH-SIE-00041	A	1639
36967	alias	S36967	EDH-SQD-00388	A	1045
3TC1QR2520	alias	3TC1QR250	EDH-SIE-00254	B	1757
3VL9120-4TC31	equivalent	3TW1CG20	EDH-SIE-00622	A	1811

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
3VL9130-4TD31	equivalent	3TA1CG30	EDH-SIE-00623	A	1808
3VL9200-4EC31	equivalent	FBCD3	EDH-SIE-00584	A	1823
3VL9200-4EC41	equivalent	FBCD4	EDH-SIE-00585	A	1823
3VL9200-4PA31	equivalent	PCBDRC3	EDH-SIE-00639	A	1818
3VL9200-4PA41	equivalent	PCBDRC4	EDH-SIE-00640	A	1819
3VL9200-4PC31	equivalent	PCBDFC3	EDH-SIE-00641	A	1818
3VL9200-4PC41	equivalent	PCBDFC4	EDH-SIE-00642	A	1818
3VL9200-4PS31	equivalent	PCXD3	EDH-SIE-00647	A	1821
3VL9200-4PS41	equivalent	PCXD4	EDH-SIE-00648	A	1821
3VL9200-4RA01	equivalent	RTLDSR	EDH-SIE-00555	A	1830
3VL9200-4RB01	equivalent	RTLDLR	EDH-SIE-00557	A	1830
3VL9200-4RC31	equivalent	SRTDR3	EDH-SIE-00558	A	1833
3VL9200-4RF41	equivalent	SRTDR4	EDH-SIE-00559	A	1833
3VL9200-4RK01	equivalent	RTLDSF	EDH-SIE-00554	A	1830
3VL9200-4RL01	equivalent	RTLDLF	EDH-SIE-00556	A	1830
3VL9200-4RM31	equivalent	SRTDF3	EDH-SIE-00560	A	1832
3VL9200-4RN41	equivalent	SRTDF4	EDH-SIE-00561	A	1833
3VL9202-4TP01	equivalent	TA3DG02	EDH-SIE-00591	A	1814
3VL9202-4TP31	equivalent	3TA3DG02	EDH-SIE-00592	A	1809
3VL9204-4TP01	equivalent	TA6DG04	EDH-SIE-00593	A	1814
3VL9204-4TP31	equivalent	3TA6DG04	EDH-SIE-00594	A	1810
3VL9220-4TC01	equivalent	TW1DG20	EDH-SIE-00603	A	1816
3VL9220-4TC31	equivalent	3TW1DG20	EDH-SIE-00604	A	1812
3VL9220-4TC41	equivalent	4TW1DG20	EDH-SIE-00605	A	1813
3VL9230-4TD01	equivalent	TA1DG30	EDH-SIE-00606	A	1814
3VL9230-4TD11	equivalent	TC1DG30	EDH-SIE-00609	A	1815
3VL9230-4TD31	equivalent	3TA1DG30	EDH-SIE-00607	A	1809
3VL9230-4TD41	equivalent	4TA1DG30	EDH-SIE-00608	A	1812
3VL9230-4TD61	equivalent	3TC1DG30	EDH-SIE-00610	A	1811
3VL9300-4EC31	equivalent	FBCF3	EDH-SIE-00586	A	1823
3VL9300-4EC41	equivalent	FBCF4	EDH-SIE-00587	A	1823
3VL9300-4PA31	equivalent	PCBFRC3	EDH-SIE-00643	A	1819
3VL9300-4PA41	equivalent	PCBFRC4	EDH-SIE-00644	A	1819
3VL9300-4PC31	equivalent	PCBFFC3	EDH-SIE-00645	A	1819
3VL9300-4PC41	equivalent	PCBFFC4	EDH-SIE-00646	A	1819
3VL9300-4PF01	equivalent	PCXFT	EDH-SIE-00649	A	1821
3VL9300-4RA01	equivalent	RTLFSR	EDH-SIE-00563	A	1831
3VL9300-4RB01	equivalent	RTLFLR	EDH-SIE-00565	A	1831
3VL9300-4RC31	equivalent	SRTFR3	EDH-SIE-00566	A	1834
3VL9300-4RF41	equivalent	SRTFR4	EDH-SIE-00567	A	1834
3VL9300-4RK01	equivalent	RTLFSF	EDH-SIE-00562	A	1831
3VL9300-4RL01	equivalent	RTLFLF	EDH-SIE-00564	A	1831
3VL9300-4RM31	equivalent	SRTFF3	EDH-SIE-00568	A	1833
3VL9300-4RN41	equivalent	SRTFF4	EDH-SIE-00569	A	1833
3VL9300-8CA31	equivalent	TSLF3	EDH-SIE-00542	A	1826
3VL9300-8CA41	equivalent	TSLF4	EDH-SIE-00543	A	1827
3VL9300-8CE41	equivalent	IPBF4	EDH-SIE-00536	A	1825
3VL9302-4TP01	equivalent	TA3FG20	EDH-SIE-00595	A	1814
3VL9302-4TP31	equivalent	3TA3FG20	EDH-SIE-00596	A	1809
3VL9304-4TP01	equivalent	TA6FG04	EDH-SIE-00597	A	1815
3VL9304-4TP31	equivalent	3TA6FG04	EDH-SIE-00598	A	1810
3VL9335-4TC01	equivalent	TW1FG350	EDH-SIE-00611	A	1816

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
3VL9335-4TC31	equivalent	3TW1FG350	EDH-SIE-00612	A	1812
3VL9335-4TC41	equivalent	4TW1FG350	EDH-SIE-00613	A	1813
3VL9335-4TD01	equivalent	TAW1FG350	EDH-SIE-00614	A	1815
3VL9335-4TD11	equivalent	TCW1FG350	EDH-SIE-00617	A	1816
3VL9335-4TD31	equivalent	3TAW1FG350	EDH-SIE-00615	A	1811
3VL9335-4TD41	equivalent	4TAW1FG350	EDH-SIE-00616	A	1813
3VL9335-4TD61	equivalent	3TCW1FG350	EDH-SIE-00618	A	1811
3VL9400-4EC31	equivalent	FBCJ3	EDH-SIE-00588	A	1824
3VL9400-4EC41	equivalent	FBCJ4	EDH-SIE-00589	A	1824
3VL9400-4PA31	equivalent	PCBJRC3	EDH-SIE-00650	A	1820
3VL9400-4PA41	equivalent	PCBJRC4	EDH-SIE-00651	A	1820
3VL9400-4PF01	equivalent	PCXLT	EDH-SIE-00653	A	1821
3VL9400-4RA01	equivalent	RTLJSR	EDH-SIE-00570	A	1832
3VL9400-4RC31	equivalent	SRTJR3	EDH-SIE-00574	A	1834
3VL9400-4RF41	equivalent	SRTJR4	EDH-SIE-00575	A	1834
3VL9400-4RK01	equivalent	RTLJSF	EDH-SIE-00572	A	1832
3VL9400-4RL01	equivalent	RTLJLF	EDH-SIE-00571	A	1831
3VL9400-4RN41	equivalent	SRTJF4	EDH-SIE-00573	A	1834
3VL9400-8CA31	equivalent	TSLL3	EDH-SIE-00544	A	1827
3VL9400-8CA41	equivalent	TSLL4	EDH-SIE-00545	A	1827
3VL9400-8CB31	equivalent	TSSL3	EDH-SIE-00546	A	1828
3VL9400-8CB41	equivalent	TSSL4	EDH-SIE-00547	A	1829
3VL9402-4TP01	equivalent	TA6JG20	EDH-SIE-00599	A	1815
3VL9402-4TP31	equivalent	3TA6JG20	EDH-SIE-00600	A	1810
3VL9404-4TP01	equivalent	TA12JG04	EDH-SIE-00601	A	1814
3VL9404-4TP31	equivalent	3TA12JG04	EDH-SIE-00602	A	1808
3VL9460-4EC31	equivalent	FBCL3	EDH-SIE-00590	A	1824
3VL9460-4PC41	equivalent	PCBLFC4	EDH-SIE-00652	A	1820
3VL9460-4RG01	equivalent	RTLLSF	EDH-SIE-00576	A	1832
3VL9460-4RH31	equivalent	SRTLF3	EDH-SIE-00577	A	1835
3VL9460-4RH41	equivalent	SRTLF4	EDH-SIE-00578	A	1835
3VL9460-4TC01	equivalent	TW1JG600	EDH-SIE-00619	A	1816
3VL9460-4TC31	equivalent	3TW1JG600	EDH-SIE-00620	A	1812
3VL9460-4TC41	equivalent	4TW1JG600	EDH-SIE-00621	A	1813
3VL9600-4PA31	equivalent	PCBMRC3	EDH-SIE-00654	A	1820
3VL9600-4PF01	equivalent	PCXMT	EDH-SIE-00657	A	1822
3VL9600-4PS31	equivalent	PCXM3	EDH-SIE-00655	A	1821
3VL9600-4RH31	equivalent	SRTMF3	EDH-SIE-00579	A	1835
3VL9600-4RH41	equivalent	SRTMF4	EDH-SIE-00580	A	1835
3VL9600-4WH01	equivalent	PCXMH	EDH-SIE-00656	A	1822
3VL9600-8CA31	equivalent	TSLM3	EDH-SIE-00548	A	1827
3VL9600-8CA41	equivalent	TSLM4	EDH-SIE-00549	A	1828
3VL9600-8CB31	equivalent	TSSM3	EDH-SIE-00550	A	1829
3VL9600-8CB41	equivalent	TSSM4	EDH-SIE-00551	A	1829
3VL9600-8CE41	equivalent	IPBM4	EDH-SIE-00538	A	1825
3VL9600-8CG31	equivalent	TSLM3M	EDH-SIE-00552	A	1828
3VL9600-8CG41	equivalent	TSLM4M	EDH-SIE-00553	A	1828
3VL9600-8SB41	equivalent	MSKM4	EDH-SIE-00638	A	1826
3VL9700-4PA31	equivalent	PCBNRC3	EDH-SIE-00658	A	1820
3VL9700-4PS31	equivalent	PCXN3	EDH-SIE-00659	A	1822
3VL9700-4RG01	equivalent	RTLNSF	EDH-SIE-00581	A	1832
3VL9700-4RH31	equivalent	SRTNF3	EDH-SIE-00582	A	1835

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
3VL9700-4RJ41	equivalent	SRTNF4	EDH-SIE-00583	A	1836
3VL9750-4TH21	equivalent	2TA4NG500	EDH-SIE-00627	A	1808
3VL9750-4TH31	equivalent	3TA4NG500	EDH-SIE-00628	A	1809
3VL9750-4TH41	equivalent	4TA4NG500	EDH-SIE-00629	A	1813
3VL9750-4TH61	equivalent	3TC4NG500	EDH-SIE-00631	A	1811
3VL9750-4TK31	equivalent	3TA4NG500H	EDH-SIE-00630	A	1810
3VL9750-4TM31	equivalent	12CLN500	EDH-SIE-00632	A	1808
3VL9775-4TG21	equivalent	2TA3NG750	EDH-SIE-00624	A	1808
3VL9775-4TG31	equivalent	3TA3NG750	EDH-SIE-00625	A	1809
3VL9775-4TG41	equivalent	4TA3NG750	EDH-SIE-00626	A	1812
3VL9800-4EB01	equivalent	LMAP1600	EDH-SIE-00635	A	1824
3VL9800-4PF01	equivalent	PCXPT	EDH-SIE-00660	A	1822
3VL9800-4TU31	equivalent	MBPG1600	EDH-SIE-00633	A	1818
3VL9800-4TV31	equivalent	MBPG1601	EDH-SIE-00634	A	1818
3VL9800-8CE41	equivalent	IPBP4	EDH-SIE-00540	A	1826
3VL9875-4TH31	equivalent	TA4P750	EDH-SIE-00297	A	1817
3VL9875-4TJ01	equivalent	TA6PG750	EDH-SIE-00636	A	1815
3VL9875-4TJ31	equivalent	3TA6PG750	EDH-SIE-00637	A	1810
40517-407-01	style_number	HNM4BL	EDH-SQD-00143	A	748
40517-408-01	style_number	HNM1BL	EDH-SQD-00142	A	747
4176B68	supersedes	42C8076	EDH-EAT-00255	C	367
4178B06H01	supersedes	42C8083H01	EDH-EAT-00285	B	370
4178B08	supersedes	42C8078	EDH-EAT-00270	C	367
4179B39	supersedes	42C8079	EDH-EAT-00271	C	368
4179B40	supersedes	42C8080	EDH-EAT-00272	C	368
4179B41	supersedes	42C8082	EDH-EAT-00274	C	369
4179B42	supersedes	42C8081	EDH-EAT-00273	C	368
4180B03	supersedes	42C8072	EDH-EAT-00242	C	248
4180B05	supersedes	42C7982	EDH-EAT-00244	C	248
4180B61	supersedes	42C8073	EDH-EAT-00243	C	248
4180B93	supersedes	42C8077	EDH-EAT-00256	C	367
42C1999G01	style_number	EZB2024R	EDH-EAT-00998	A	278
42C1999G02	style_number	EZB2030R	EDH-EAT-01004	A	278
42C1999G03	style_number	EZB2036R	EDH-EAT-01010	A	279
42C1999G04	style_number	EZB2042R	EDH-EAT-01016	A	279
42C1999G05	style_number	EZB2048R	EDH-EAT-01022	A	279
42C1999G06	style_number	EZB2054R	EDH-EAT-01028	A	280
42C1999G07	style_number	EZB2060R	EDH-EAT-01034	A	280
42C1999G09	style_number	EZB2072R	EDH-EAT-01040	A	280
42C1999G12	style_number	EZB2090R	EDH-EAT-01046	A	281
42C1999G13	style_number	EZBP2024R	EDH-EAT-00999	A	281
42C1999G14	style_number	EZBP2030R	EDH-EAT-01005	A	281
42C1999G15	style_number	EZBP2036R	EDH-EAT-01011	A	282
42C1999G16	style_number	EZBP2042R	EDH-EAT-01017	A	282
42C1999G17	style_number	EZBP2048R	EDH-EAT-01023	A	282
42C1999G18	style_number	EZBP2054R	EDH-EAT-01029	A	283
42C1999G19	style_number	EZBP2060R	EDH-EAT-01035	A	283
42C1999G21	style_number	EZBP2072R	EDH-EAT-01041	A	283
42C1999G24	style_number	EZBP2090R	EDH-EAT-01047	A	284
42C4255G01	style_number	EZT2024S	EDH-EAT-01000	A	256
42C4255G02	style_number	EZT2030S	EDH-EAT-01006	A	257
42C4255G03	style_number	EZT2036S	EDH-EAT-01012	A	258

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
42C4255G04	style_number	EZT2042S	EDH-EAT-01018	A	259
42C4255G05	style_number	EZT2048S	EDH-EAT-01024	A	260
42C4255G06	style_number	EZT2054S	EDH-EAT-01030	A	261
42C4255G07	style_number	EZT2060S	EDH-EAT-01036	A	262
42C4255G09	style_number	EZT2072S	EDH-EAT-01042	A	263
42C4255G12	style_number	EZT2090S	EDH-EAT-01048	A	264
42C4258G01	style_number	EZT2024F	EDH-EAT-01001	A	256
42C4258G02	style_number	EZT2030F	EDH-EAT-01007	A	256
42C4258G03	style_number	EZT2036F	EDH-EAT-01013	A	257
42C4258G04	style_number	EZT2042F	EDH-EAT-01019	A	258
42C4258G05	style_number	EZT2048F	EDH-EAT-01025	A	259
42C4258G06	style_number	EZT2054F	EDH-EAT-01031	A	260
42C4258G07	style_number	EZT2060F	EDH-EAT-01037	A	261
42C4258G09	style_number	EZT2072F	EDH-EAT-01043	A	262
42C4258G12	style_number	EZT2090F	EDH-EAT-01049	A	263
42C4261G01	style_number	EZTV2024S	EDH-EAT-01002	A	265
42C4261G02	style_number	EZTV2030S	EDH-EAT-01008	A	265
42C4261G03	style_number	EZTV2036S	EDH-EAT-01014	A	266
42C4261G04	style_number	EZTV2042S	EDH-EAT-01020	A	267
42C4261G05	style_number	EZTV2048S	EDH-EAT-01026	A	268
42C4261G06	style_number	EZTV2054S	EDH-EAT-01032	A	269
42C4261G07	style_number	EZTV2060S	EDH-EAT-01038	A	270
42C4261G09	style_number	EZTV2072S	EDH-EAT-01044	A	271
42C4261G12	style_number	EZTV2090S	EDH-EAT-01050	A	272
42C4264G01	style_number	EZTV2024F	EDH-EAT-01003	A	264
42C4264G02	style_number	EZTV2030F	EDH-EAT-01009	A	265
42C4264G03	style_number	EZTV2036F	EDH-EAT-01015	A	266
42C4264G04	style_number	EZTV2042F	EDH-EAT-01021	A	267
42C4264G05	style_number	EZTV2048F	EDH-EAT-01027	A	268
42C4264G06	style_number	EZTV2054F	EDH-EAT-01033	A	269
42C4264G07	style_number	EZTV2060F	EDH-EAT-01039	A	270
42C4264G09	style_number	EZTV2072F	EDH-EAT-01045	A	271
42C4264G12	style_number	EZTV2090F	EDH-EAT-01051	A	272
42C7982	superseded_by	4180B05	EDH-EAT-00247	C	247
42C8072	superseded_by	4180B03	EDH-EAT-00245	C	246
42C8073	superseded_by	4180B61	EDH-EAT-00246	C	247
42C8076	superseded_by	4176B68	EDH-EAT-00267	C	363
42C8077	superseded_by	4180B93	EDH-EAT-00268	C	366
42C8078	superseded_by	4178B08	EDH-EAT-00280	C	365
42C8079	superseded_by	4179B39	EDH-EAT-00281	C	365
42C8080	superseded_by	4179B40	EDH-EAT-00282	C	365
42C8081	superseded_by	4179B42	EDH-EAT-00284	C	366
42C8082	superseded_by	4179B41	EDH-EAT-00283	C	365
42C8083H01	superseded_by	4178B06H01	EDH-EAT-00286	B	370
42NLK30A	supersedes	42NLK54B	EDH-SIE-00042	A	1641
42NLK42A	supersedes	42NLK54B	EDH-SIE-00042	A	1641
42NLK54A	supersedes	42NLK54B	EDH-SIE-00042	A	1641
4 ckt 2X H01; 8/4X H02; ... 32/16X H08	style_number	42C8079	EDH-EAT-00271	A	368
4MLKA1	equivalent	4MLKA1A	EDH-SIE-00019	A	1627
4MLKA3	equivalent	4MLKA3A	EDH-SIE-00020	A	1628
4MLKC1	equivalent	4MLKC1A	EDH-SIE-00021	A	1630

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
4MLKC3	equivalent	4MLKC3A	EDH-SIE-00022	A	1631
5158C05G06 (boxes 30 in and above)	style_number	5158C05G05	EDH-EAT-00237	A	174
5FJ2	equivalent	BFJITE	EDH-OTH-00067	C	1714
5JJ2	equivalent	BJLITE	EDH-OTH-00066	C	1715
6 ckt 3X H01; 12/5X H02; 18/8X H03; 24/10X H04	style_number	4176B69	EDH-EAT-00278	A	364
6 ckt 3X H01; 12/6X H02; 18/9X H03; 24/12X H04; 30/15X H05; 36/18X H06; 42/21X H07; 48/24X H08	style_number	42C8078	EDH-EAT-00270	A	367
6 ckt 3X H01; 12 ckt 5X H02; 18 ckt 8X H03; 24 ckt 10X H04	style_number	4176B67	EDH-EAT-00277	A	363
6CLF1C	alias	6CLF1	EDH-SIE-00191	A	1721
6CLJ1C	alias	6CLJ1	EDH-SIE-00194	A	1722
6CLL1C	alias	6CLL1	EDH-SIE-00198	A	1724
6E62	equivalent	BEDITE	EDH-OTH-00054	C	1713
6F62	equivalent	BFDITE	EDH-OTH-00056	C	1714
6JJ61	equivalent	BJDSGLITE	EDH-OTH-00057	C	1715
6JJ62	equivalent	BJDITE	EDH-OTH-00058	C	1714
6LL61	equivalent	BLDITE	EDH-OTH-00059	C	1716
6LL61C	alias	6LL61	EDH-SIE-00197	A	1570
6QJ2	equivalent	BQJITE	EDH-OTH-00055	C	1717
6QR2CAN	alias	6QR2	EDH-SIE-00157	A	1520
6QR2CCAN	alias	6QR2	EDH-SIE-00157	A	1520
6SJL1C	alias	6SJL1	EDH-SIE-00195	A	1573
783643502277	alias	3TC1Q1	EDH-SIE-00246	A	1753
789A448G377 (as printed)	alias	789A448G3	EDH-GEA-00330	C	1422
80025-067-01	supersedes	PKDFSCREW	EDH-SQD-00363	A	775
80034-187-02	style_number	HLW1BL	EDH-SQD-00144	A	745
80034-188-03	style_number	HLW4BL	EDH-SQD-00145	A	746
80121-651-01	style_number	HLN1BL	EDH-SQD-00146	A	743
80121-652-01	style_number	HLN4BL	EDH-SQD-00147	A	744
80121-653-01	style_number	HLW4EBL	EDH-SQD-00148	A	746
80121-752-01	style_number	HLN4EBL	EDH-SQD-00149	A	744
8450C62H39	equivalent	K80133	EDH-EAT-00406	C	273
ACSFPKSG	equivalent	ACSMKSG	EDH-GEA-00254	A	1164
ACSFPKSK	equivalent	ACSMKSK	EDH-GEA-00255	A	1164
ACSHKSG	equivalent	ACSMKSG	EDH-GEA-00254	A	1164
ACSHKSK	equivalent	ACSMKSK	EDH-GEA-00255	A	1164
ACTFPKEB1P	equivalent	ACTMKEB1P	EDH-GEA-00246	A	1165
ACTFPKEB2P	equivalent	ACTMKEB2P	EDH-GEA-00247	A	1166
ACTFPKEB3P	equivalent	ACTMKEB3P	EDH-GEA-00248	A	1166
ACTFPKJD	equivalent	ACTMKJD	EDH-GEA-00252	A	1166
ACTFPKQD2P	equivalent	ACTMKQD2P	EDH-GEA-00250	A	1167
ACTFPKQD3P	equivalent	ACTMKQD3P	EDH-GEA-00251	A	1167
ACTFPKSE	equivalent	ACTMKSE	EDH-GEA-00245	A	1167
ACTFPKSF	equivalent	ACTMKSF	EDH-GEA-00249	A	1168
ACTFPKSG	equivalent	ACTMKSG	EDH-GEA-00253	A	1168
ACTHKEB1P	equivalent	ACTMKEB1P	EDH-GEA-00246	A	1165
ACTHKEB2P	equivalent	ACTMKEB2P	EDH-GEA-00247	A	1166
ACTHKEB3P	equivalent	ACTMKEB3P	EDH-GEA-00248	A	1166
ACTHKJD	equivalent	ACTMKJD	EDH-GEA-00252	A	1166
ACTHKQD2P	equivalent	ACTMKQD2P	EDH-GEA-00250	A	1167

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
ACTHKQD3P	equivalent	ACTMKQD3P	EDH-GEA-00251	A	1167
ACTHKSE	equivalent	ACTMKSE	EDH-GEA-00245	A	1167
ACTHKSF	equivalent	ACTMKSF	EDH-GEA-00249	A	1168
ACTHKSG	equivalent	ACTMKSG	EDH-GEA-00253	A	1168
AL400L6IK3	alias	AL400L61K3	EDH-SQD-00421	A	1034
AMB2120CAF	equivalent	AMB2120CA	EDH-GEA-00530	A	1186
AMB2120DCAF	equivalent	AMB2120DCA	EDH-GEA-00538	A	1186
AMB2120DMAF	equivalent	AMB2120DMA	EDH-GEA-00518	A	1187
AMB2120DMCF	equivalent	AMB2120DMC	EDH-GEA-00516	A	1187
AMB2120DNF	equivalent	AMB2120DN	EDH-GEA-00522	A	1188
AMB2120MAF	equivalent	AMB2120MA	EDH-GEA-00513	A	1188
AMB2120NF	equivalent	AMB2120N	EDH-GEA-00520	A	1189
AMB2250CAF	equivalent	AMB2250CA	EDH-GEA-00524	A	1189
AMB2250DCAF	equivalent	AMB2250DCA	EDH-GEA-00532	A	1190
AMB2600CAF	equivalent	AMB2600CA	EDH-GEA-00526	A	1190
AMB2600DCAF	equivalent	AMB2600DCA	EDH-GEA-00534	A	1191
AMB2600MAF	equivalent	AMB2600MA	EDH-GEA-00509	A	1191
AMB2600MCF	equivalent	AMB2600MC	EDH-GEA-00511	A	1192
AMB2800CAF	equivalent	AMB2800CA	EDH-GEA-00528	A	1192
AMB2800DCAF	equivalent	AMB2800DCA	EDH-GEA-00536	A	1193
AMB3120CAF	equivalent	AMB3120CA	EDH-GEA-00531	A	1193
AMB3120DCAF	equivalent	AMB3120DCA	EDH-GEA-00539	A	1194
AMB3120DMAF	equivalent	AMB3120DMA	EDH-GEA-00519	A	1194
AMB3120DMCF	equivalent	AMB3120DMC	EDH-GEA-00517	A	1195
AMB3120DNF	equivalent	AMB3120DN	EDH-GEA-00523	A	1195
AMB3120MAF	equivalent	AMB3120MA	EDH-GEA-00514	A	1196
AMB3120MCF	equivalent	AMB3120MC	EDH-GEA-00515	A	1196
AMB3120NF	equivalent	AMB3120N	EDH-GEA-00521	A	1197
AMB3250CAF	equivalent	AMB3250CA	EDH-GEA-00525	A	1197
AMB3250DCAF	equivalent	AMB3250DCA	EDH-GEA-00533	A	1198
AMB3600CAF	equivalent	AMB3600CA	EDH-GEA-00527	A	1198
AMB3600DCAF	equivalent	AMB3600DCA	EDH-GEA-00535	A	1199
AMB3600MAF	equivalent	AMB3600MA	EDH-GEA-00510	A	1199
AMB3600MCF	equivalent	AMB3600MC	EDH-GEA-00512	A	1200
AMB3800CAF	equivalent	AMB3800CA	EDH-GEA-00529	A	1200
AMB3800DCAF	equivalent	AMB3800DCA	EDH-GEA-00537	A	1201
AMC2FGM	alias	AMC2FGMFP	EDH-GEA-00181	B	1250
AMC2FJ	alias	AMC2FJFP	EDH-GEA-00179	B	1250
AMC2FJFP1	alias	AMC2FJFP	EDH-GEA-00179	A	1250
AMC2FJFPTF	alias	AMC2FJFPTF	EDH-GEA-00178	B	1251
AMC2FLS	alias	AMC2FLSFP	EDH-GEA-00184	B	1252
AMC2GM	alias	AMC2GMFP	EDH-GEA-00182	B	1253
AMC2JK	alias	AMC2JKFP	EDH-GEA-00180	B	1254
AMC2KM	alias	AMC2KMFP	EDH-GEA-00183	B	1254
AMC3FGM	alias	AMC3FGMFP	EDH-GEA-00162	B	1256
AMC3FJ	alias	AMC3FJFP	EDH-GEA-00160	B	1256
AMC3FJFP1	alias	AMC3FJFP	EDH-GEA-00160	A	1256
AMC3FJFPTF	alias	AMC3FJFPTF	EDH-GEA-00159	B	1257
AMC3FLS	alias	AMC3FLSFP	EDH-GEA-00165	B	1258
AMC3GM	alias	AMC3GMFP	EDH-GEA-00163	B	1258
AMC3JK	alias	AMC3JKFP	EDH-GEA-00161	B	1259
AMC3KM	alias	AMC3KMFP	EDH-GEA-00164	B	1260

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
AMC4EB	alias	AMC4EBFP	EDH-GEA-00167	B	1261
AMC4EBS	alias	AMC4EBSFP	EDH-GEA-00176	B	1262
AMC4FDB	alias	AMC4FDBFP	EDH-GEA-00166	B	1263
AMC4FDS	alias	AMC4FDSFP	EDH-GEA-00175	B	1263
AMC4FGB	alias	AMC4FGBFP	EDH-GEA-00173	B	1264
AMC4FJ	alias	AMC4FJFP	EDH-GEA-00171	B	1264
AMC4FJFP1	alias	AMC4FJFP	EDH-GEA-00171	A	1264
AMC4FJFPTF	alias	AMC4FJFPTF	EDH-GEA-00170	B	1265
AMC4FLS	alias	AMC4FLSFP	EDH-GEA-00177	B	1266
AMC4GB	alias	AMC4GBFP	EDH-GEA-00174	B	1267
AMC4GBFP2	alias	AMC4GBFP	EDH-GEA-00174	A	1267
AMC4JK	alias	AMC4JKFP	EDH-GEA-00172	B	1267
AMC4QD	alias	AMC4QDFP	EDH-GEA-00169	B	1268
AMC4SE	alias	AMC4SEFP	EDH-GEA-00168	B	1269
AMC6EB	alias	AMC6EBFP	EDH-GEA-00149	B	1270
AMC6EBS	alias	AMC6EBSFP	EDH-GEA-00157	B	1271
AMC6EY	alias	AMC6EYFP	EDH-GEA-00146	B	1272
AMC6FB	alias	AMC6FBFP	EDH-GEA-00147	B	1273
AMC6FDB	alias	AMC6FDBFP	EDH-GEA-00148	B	1274
AMC6FDSPF	alias	AMC6FDSPF	EDH-GEA-00156	B	1274
AMC6FGB	alias	AMC6FGBFP	EDH-GEA-00154	B	1275
AMC6FJ	alias	AMC6FJFP	EDH-GEA-00152	B	1275
AMC6FJFP1	alias	AMC6FJFP	EDH-GEA-00152	A	1275
AMC6FJFPTF	alias	AMC6FJFPTF	EDH-GEA-00151	B	1276
AMC6FLS	alias	AMC6FLSFP	EDH-GEA-00158	B	1277
AMC6GB	alias	AMC6GBFP	EDH-GEA-00155	B	1277
AMC6GBFP2	alias	AMC6GBFP	EDH-GEA-00155	A	1277
AMC6JK	alias	AMC6JKFP	EDH-GEA-00153	B	1278
AMC6QB	alias	AMC6QBFP	EDH-GEA-00145	B	1279
AMC6QD	alias	AMC6QDFP	EDH-GEA-00150	B	1280
AMCB2FGM	alias	AMCB2FGMFP	EDH-GEA-00119	B	1217
AMCB2FJ	alias	AMCB2FJFP	EDH-GEA-00117	B	1219
AMCB2FJTF	alias	AMCB2FJFPTF	EDH-GEA-00118	B	1219
AMCB2GM	alias	AMCB2GMFP	EDH-GEA-00120	B	1221
AMCB2KM	alias	AMCB2KMFP	EDH-GEA-00126	B	1222
AMCB3FGM	alias	AMCB3FGMFP	EDH-GEA-00123	B	1222
AMCB3FJ	alias	AMCB3FJFP	EDH-GEA-00121	B	1223
AMCB3FJFP	supersedes	SRFB3XT4FPX	EDH-GEA-00551	A	1348
AMCB3FJFP	supersedes	SRFB3XT4FPK	EDH-GEA-00552	A	1347
AMCB3FJFP	equivalent	BAMCB3FJGE	EDH-OTH-00046	C	1246
AMCB3FJTF	alias	AMCB3FJFPTF	EDH-GEA-00122	B	1224
AMCB3GM	alias	AMCB3GMFP	EDH-GEA-00124	B	1225
AMCB3GMFP	supersedes	SRFB3XT5MFPX	EDH-GEA-00555	A	1349
AMCB3GMFP	supersedes	SRFB3XT5MFPK	EDH-GEA-00556	A	1348
AMCB3GMFP	equivalent	BAMCB3GMGE	EDH-OTH-00047	C	1246
AMCB3KM	alias	AMCB3KMFP	EDH-GEA-00127	B	1226
AMCB3KMFP	supersedes	SRFB3XT7MFPX	EDH-GEA-00557	A	1350
AMCB3KMFP	supersedes	SRFB3XT7MFPK	EDH-GEA-00558	A	1349
AMCB3KMFP	equivalent	BAMCB35KMGE	EDH-OTH-00048	C	1246
AMCB3LB	alias	AMCB3LBFP	EDH-GEA-00125	B	1227
AMCB4EB	alias	AMCB4EBFP	EDH-GEA-00098	B	1229
AMCB4EY	alias	AMCB4EYFP	EDH-GEA-00099	B	1230

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
AMCB4FB	alias	AMCB4FBFP	EDH-GEA-00100	B	1230
AMCB4FDB	alias	AMCB4FDBFP	EDH-GEA-00101	B	1231
AMCB4FGB	alias	AMCB4FGBFP	EDH-GEA-00113	B	1231
AMCB4FJ	alias	AMCB4FJFP	EDH-GEA-00109	B	1233
AMCB4FJTF	alias	AMCB4FJFPTF	EDH-GEA-00111	B	1233
AMCB4GB	alias	AMCB4GBFP	EDH-GEA-00114	B	1235
AMCB4QD	alias	AMCB4QDFP	EDH-GEA-00102	B	1235
AMCB4SE	alias	AMCB4SEFP	EDH-GEA-00103	B	1237
AMCB6EB	alias	AMCB6EBFP	EDH-GEA-00104	B	1238
AMCB6EBFP	supersedes	SRFB6XT1FPX	EDH-GEA-00547	A	1351
AMCB6EBFP	supersedes	SRFB6XT1FPK	EDH-GEA-00548	A	1350
AMCB6EBFP	equivalent	BAMCB6EBGE	EDH-OTH-00049	C	1247
AMCB6EY	alias	AMCB6EYFP	EDH-GEA-00105	B	1239
AMCB6EYFP	equivalent	BAMCB6EYGE	EDH-OTH-00050	C	1247
AMCB6FB	alias	AMCB6FBFP	EDH-GEA-00106	B	1240
AMCB6FDB	alias	AMCB6FDBFP	EDH-GEA-00107	B	1241
AMCB6FGB	alias	AMCB6FGBFP	EDH-GEA-00115	B	1241
AMCB6FJ	alias	AMCB6FJFP	EDH-GEA-00110	B	1242
AMCB6FJFP	supersedes	SRFB6XT4FPX	EDH-GEA-00549	A	1352
AMCB6FJFP	supersedes	SRFB6XT4FPK	EDH-GEA-00550	A	1351
AMCB6FJFP	equivalent	BAMCB6FJGE	EDH-OTH-00052	C	1247
AMCB6FJTF	alias	AMCB6FJFPTF	EDH-GEA-00112	B	1243
AMCB6GB	alias	AMCB6GBFP	EDH-GEA-00116	B	1244
AMCB6GBFP	supersedes	SRFB6XT5BFPX	EDH-GEA-00553	A	1353
AMCB6GBFP	supersedes	SRFB6XT5BFPK	EDH-GEA-00554	A	1352
AMCB6GBFP	equivalent	BAMCB6GBGE	EDH-OTH-00053	C	1248
AMCB6QD	alias	AMCB6QDFP	EDH-GEA-00108	B	1245
AMCB6QDFP	equivalent	BAMCB6QDGE	EDH-OTH-00051	C	1248
AML3250SFP1	alias	AML3250SFP	EDH-GEA-00219	A	1202
AML3400SFP1	alias	AML3400SFP	EDH-GEA-00221	A	1203
AML3600SFP1	alias	AML3600SFP	EDH-GEA-00223	A	1204
BBKVA5262S	alias	BBKVA5262P2S	EDH-SIE-00112	A	1490
BBKVA52P3HW	alias	BBKVR52P3HW	EDH-SIE-00409	A	1515
Bottom H01 (no L/O), H02 (2 L/O), H03 (1 L/O RT), H04 (1 L/O LT); top H05, H07 (1 L/O RT), H08 (1 L/O LT)	style_number	4176B79	EDH-EAT-00265	A	364
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	4176B61	EDH-EAT-00260	A	363
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	4176B51	EDH-EAT-00261	A	362
BQFS1K	equivalent	BQFS2	EDH-SIE-00252	A	1750
Breaker-included versions: MBKVAM1300A, MBKVAM1400A, MBKVAH3300A, MBKVAH3400A, MBKVAM3300A, MBKVAM3400A	equivalent	MBKVA5363A	EDH-SIE-00011	A	1624
Breaker-included versions: MBKVAM3150A, MBKVAM3200A, MBKVAM3225A, MBKVAM3250A, MBKVAH3200A, MBKVAH3250A	equivalent	MBKVA5262A	EDH-SIE-00009	A	1623
Breaker-included versions: MBKVAM3150A, MBKVAM3200A, MBKVAM3225A, MBKVAM3250A, MBKVAH3200A, MBKVAH3250A	equivalent	MBKVA5262B	EDH-SIE-00010	A	1623

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
BX2457 G02; BX2473 G03; BX2490 G04; BX3673/BX4473 G05; BX3690/BX4490 G06	style_number	6574C74	EDH-EAT-00298	A	470
CA1K	alias	BCDPCACH	EDH-OTH-00029	C	82
CA4K	alias	BPRLCACH	EDH-OTH-00013	C	431
CCBFP3	alias	GAVFP3	EDH-GEA-00612	C	1129
CED6	alias	6CLE2	EDH-SIE-00155	A	1563
Chassis height 14X G01; 23X G02; 31X G03; 40X G04; 53X G05	style_number	6559C59	EDH-EAT-00254	A	369
CNLK30A	supersedes	CNLK42B	EDH-SIE-00038	A	1642
CNLK42A	supersedes	CNLK42B	EDH-SIE-00038	A	1642
CNLK54A	supersedes	CNLK54B	EDH-SIE-00039	A	1643
Controller 5X H01; Expansion 7X H02, 16X H03	style_number	4180B91	EDH-EAT-00279	A	366
DFFP01A	supersedes	DFFP01B	EDH-SIE-00064	A	1671
DFFP1	supersedes	DFFP1A	EDH-SIE-00062	A	1672
DFFP1A	superseded_by	QF3	EDH-SIE-00063	A	1482
DFFPED01	supersedes	DFFPVA41A	EDH-SIE-00066	A	1678
DFFPVA41A	superseded_by	DFFPED01	EDH-SIE-00069	A	1673
ED3K	alias	BPRL3AEDCH	EDH-OTH-00010	C	325
ED4BK	alias	BPRL4BEDCH	EDH-OTH-00022	C	429
ED4K	alias	BPRLEDCH	EDH-OTH-00012	C	431
ED64K	alias	BEDSITE	EDH-OTH-00061	C	1522
ED65K	alias	BEDITE	EDH-OTH-00054	C	1713
EDPA	equivalent	HPAFD	EDH-SQD-00959	C	817
EEFPB10T2	alias	EEFBP10T2	EDH-EAT-00965	D	115
EEFPB6T2	alias	EEFBP6T2	EDH-EAT-00960	D	116
Enclosure height 24 in G01; 36 in G02; 42 in G07; 48 in G03; 60 in G04; 72 in G05; 90 in G06	style_number	1C96638	EDH-EAT-00241	A	246
FB1K	alias	BCDPFBCH	EDH-OTH-00028	C	82
FD3K	alias	BPRL3AFDCH	EDH-OTH-00009	C	325
FD4BK	alias	BPRL4BFDCH	EDH-OTH-00021	C	429
FD64K	alias	BFDSITE	EDH-OTH-00063	C	1522
FD65K	alias	BFDITE	EDH-OTH-00056	C	1714
FJ3K	alias	BFJITE	EDH-OTH-00067	C	1714
G01 24 in Al/Cu; G02 24 in Cu; G03 36-90 in Al/Cu; G04 36-90 in Cu	style_number	2C11296	EDH-EAT-00236	A	242
G01 24 in encl Al/Cu; G03 24 in Cu; G02 36-90 in encl Al/Cu; G04 36-90 in Cu (vintage PRL: G02 boxes >=30 in, G01 boxes <30 in)	style_number	5158C05	EDH-EAT-00235	A	242
GCWTK	alias	5652B38G01	EDH-EAT-00576	A	668
GTIN 785901798019	alias	QMB15BLW	EDH-SQD-00312	A	933
H01	style_number	4176B57	EDH-EAT-00263	A	362
H01	style_number	42C8080	EDH-EAT-00272	A	368
H01	style_number	42C8081	EDH-EAT-00273	A	368
H01	style_number	42C8082	EDH-EAT-00274	A	369
H01	style_number	4176B66	EDH-EAT-00275	A	363
H01	style_number	4176B80	EDH-EAT-00276	A	364
H01 = 1.00 in (25.4 mm) ... H16 = 16.00 in (406.4 mm), 1 in increments	style_number	4180B08	EDH-EAT-00249	A	249

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
H01 12 ckt 10 in; H02 18/13 in; H03 24/16 in; H04 30/19 in; H05 36/22 in; H06 42/25 in; H07 48/28 in; H08 54/31 in; H09 60/34 in	style_number	5156C10	EDH-EAT-00289	A	175
H01 = 1X ... H12 = 12X	style_number	4176B72	EDH-EAT-00269	A	370
H01 bottom/H02 with lock-offs; H03 top/H04 with lock-offs	style_number	4176B60	EDH-EAT-00259	A	362
H01 FCL; H02 FB-P	style_number	4176B70	EDH-EAT-00262	A	364
H01/H02 top; H03/H04 bottom (without/with lock-offs)	style_number	4176B56	EDH-EAT-00264	A	362
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	4176B68	EDH-EAT-00267	A	363
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	4180B93	EDH-EAT-00268	A	366
H01-H09 (12-60 circuits, 10-34 in high; same heights as 5156C10)	style_number	5156C09	EDH-EAT-00290	A	175
H01 (top and bottom)	style_number	4180B03	EDH-EAT-00245	A	246
H01 (top and bottom)	style_number	4180B61	EDH-EAT-00246	A	247
H01 top, H02 bottom	style_number	42C8072	EDH-EAT-00242	A	248
H01 top, H02 bottom	style_number	42C7982	EDH-EAT-00244	A	248
H01 top, H02 bottom	style_number	4180B05	EDH-EAT-00247	A	247
H01 top, H02 bottom	style_number	4180B04	EDH-EAT-00248	A	247
H01 top, H02 bottom	style_number	42C8077	EDH-EAT-00256	A	367
H01 top, H02 bottom	style_number	42C8055	EDH-EAT-00258	A	419
H01 top, H02 bottom (same with/without lock-offs)	style_number	42C8076	EDH-EAT-00255	A	367
H01 top, H04 bottom	style_number	42C8073	EDH-EAT-00243	A	248
H01 top (thermal-magnetic), H02 bottom (PXR)	style_number	42C7980	EDH-EAT-00257	A	419
HC2609DEXS	alias	HC2609DEXF	EDH-SQD-00788	A	760
HC-2609-EXS	equivalent	HC-2609-EXF	EDH-SQD-00556	A	760
HC-2636-CS	alias	HC-2636-CF	EDH-SQD-00825	A	750
HC-2645-CS	alias	HC-2645-CF	EDH-SQD-00827	A	750
HC-2654-CS	alias	HC-2654-CF	EDH-SQD-00829	A	750
HC-2663-CS	alias	HC-2663-CF	EDH-SQD-00831	A	750
HC-2672-CS	alias	HC-2672-CF	EDH-SQD-00833	A	751
HC2686T( )D	alias	HC2686T	EDH-SQD-00784	A	751
HC2686TF	alias	HC2686T	EDH-SQD-00784	A	751
HC2686TS	alias	HC2686T	EDH-SQD-00784	A	751
HC-2690-CS	alias	HC-2690-CF	EDH-SQD-00835	A	751
HC-2SN	alias	HC2SN	EDH-SQD-00162	A	719
HC-3209-EXF	alias	HC-3209-EXF	EDH-SQD-00557	B	763
HC-3209-EXS	equivalent	HC-3209-EXF	EDH-SQD-00557	A	763
HC3209EXS	alias	HC-3209-EXF	EDH-SQD-00557	A	763
HC-3238-TS	alias	HC-3238-TF	EDH-SQD-00837	A	751
HC-3247-TS	alias	HC-3247-TF	EDH-SQD-00839	A	752
HC-3256-TS	alias	HC-3256-TF	EDH-SQD-00841	A	752
HC-3274-TS	alias	HC-3274-TF	EDH-SQD-00843	A	752
HC-3292-TS	alias	HC-3292-TF	EDH-SQD-00845	A	752
HC-4112-DEXS	equivalent	HC-4112-DEXF	EDH-SQD-00559	A	765
HC-4112-EXS	equivalent	HC-4112-EXF	EDH-SQD-00558	A	766
HC4212DEXS	alias	HC4212DEXF	EDH-SQD-00789	A	769
HC4406DEXS	alias	HC4406DEXF	EDH-SQD-00790	A	770
HC4412DEXS	alias	HC4412DEXF	EDH-SQD-00791	A	771
HC-4SN	alias	HC4SN	EDH-SQD-00163	A	720

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
HC-6SN	alias	HC6SN	EDH-SQD-00164	A	720
HC-8SN	alias	HC8SN	EDH-SQD-00165	A	721
HCM48T( )D	alias	HCM48T	EDH-SQD-00781	A	754
HCM48TF	alias	HCM48T	EDH-SQD-00781	A	754
HCM48TS	alias	HCM48T	EDH-SQD-00781	A	754
HCM73T( )D	alias	HCM73T	EDH-SQD-00782	A	754
HCM73TF	alias	HCM73T	EDH-SQD-00782	A	754
HCM73TS	alias	HCM73T	EDH-SQD-00782	A	754
HCM91T( )D	alias	HCM91T	EDH-SQD-00783	A	754
HCM91TF	alias	HCM91T	EDH-SQD-00783	A	754
HCM91TS	alias	HCM91T	EDH-SQD-00783	A	754
HCP54868SU	alias	HCP5486-8SU	EDH-SQD-00787	A	736
HCR86T( )D	alias	HCR86T	EDH-SQD-00780	A	755
HCR86TF	alias	HCR86T	EDH-SQD-00780	A	755
HCR86TS	alias	HCR86T	EDH-SQD-00780	A	755
HCS-4144-TS	alias	HCS-4144-TF	EDH-SQD-00847	A	755
HCS-4153-TS	alias	HCS-4153-TF	EDH-SQD-00849	A	755
HCS-4162-TS	alias	HCS-4162-TF	EDH-SQD-00851	A	755
HCS-4180-TS	alias	HCS-4180-TF	EDH-SQD-00853	A	756
HCW-12SN	alias	HCW12SN	EDH-SQD-00170	A	727
HCW-4SN	alias	HCW4SN	EDH-SQD-00167	A	728
HCW50T( )D	alias	HCW50T	EDH-SQD-00776	A	756
HCW50TF	alias	HCW50T	EDH-SQD-00776	A	756
HCW50TS	alias	HCW50T	EDH-SQD-00776	A	756
HCW59T( )D	alias	HCW59T	EDH-SQD-00777	A	757
HCW59TF	alias	HCW59T	EDH-SQD-00777	A	757
HCW59TS	alias	HCW59T	EDH-SQD-00777	A	757
HCW68T( )D	alias	HCW68T	EDH-SQD-00778	A	757
HCW68TF	alias	HCW68T	EDH-SQD-00778	A	757
HCW68TS	alias	HCW68T	EDH-SQD-00778	A	757
HCW-6SN	alias	HCW6SN	EDH-SQD-00168	A	729
HCW86T( )D	alias	HCW86T	EDH-SQD-00779	A	758
HCW86TF	alias	HCW86T	EDH-SQD-00779	A	758
HCW86TS	alias	HCW86T	EDH-SQD-00779	A	758
HCW-8SN	alias	HCW8SN	EDH-SQD-00169	A	730
HJQLLC	alias	NQHJQLLC	EDH-SQD-00046	A	849
HLW-1BL	alias	HLW1BL	EDH-SQD-00144	A	745
HLW-3BL	alias	HLW-3BL	EDH-SQD-00562	A	746
HLW-4BL	alias	HLW4BL	EDH-SQD-00145	A	746
HNM-1BL	alias	HNM1BL	EDH-SQD-00142	A	747
HNM-3BL	alias	HNM-3BL	EDH-SQD-00561	A	748
HNM-4BL	alias	HNM4BL	EDH-SQD-00143	A	748
ILMLC2W1	alias	ILMLC2W	EDH-SQD-00589	C	780
ILMLC3W1	alias	ILMLC3W	EDH-SQD-00588	C	780
ILMLC4W1	alias	ILMLC4W	EDH-SQD-00587	C	781
JD4K	alias	BPRLJDTCH	EDH-OTH-00014	C	432
JD64K	alias	BJDSITE	EDH-OTH-00064	C	1522
JD65K	alias	BJDITE	EDH-OTH-00058	C	1714
JDS4BK	alias	BPRL4BJDSCH	EDH-OTH-00023	C	430
JDS4K	alias	BPRLJDSCH	EDH-OTH-00015	C	432
JDS65K	alias	BJDSGLITE	EDH-OTH-00057	C	1715
JJ3K	alias	BJLITE	EDH-OTH-00066	C	1715

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
KB1K	alias	BCDPKBCH	EDH-OTH-00030	C	82
KBDP-1C	alias	KBDP1C	EDH-FPE-00007	C	1850
KBDP1C	equivalent	BBDPNEF10FPE	EDH-OTH-00006	C	1848
KBDP-2C	alias	KBDP2C	EDH-FPE-00008	C	1850
KBDP2C	equivalent	BBDPNEJFPE	EDH-OTH-00007	C	1849
KBDP-3C	alias	KBDP3C	EDH-FPE-00009	C	1851
KBDP-4C	alias	KBDP4C	EDH-FPE-00010	C	1851
KBDP4C	equivalent	BBDPNJLFPE	EDH-OTH-00008	C	1849
KCDP-1C	alias	KCDP1C	EDH-FPE-00001	C	1855
KCDP1C	equivalent	BCDPNEF10FPE	EDH-OTH-00002	C	1853
KCDP-2C	alias	KCDP2C	EDH-FPE-00002	C	1856
KCDP2C	equivalent	BCDPNEJFPE	EDH-OTH-00003	C	1854
KCDP-3C	alias	KCDP3C	EDH-FPE-00003	C	1856
KCDP3C	equivalent	BCDPNFJFPE	EDH-OTH-00004	C	1854
KCDP-4C	alias	KCDP4C	EDH-FPE-00004	C	1857
KCDP4C	equivalent	BCDPNJLFPE	EDH-OTH-00005	C	1855
KCDP-5C	alias	KCDP5C	EDH-FPE-00005	C	1857
KCDPCA	equivalent	BCDPCACH	EDH-OTH-00029	C	82
KCDPFB150	equivalent	BCDPFBCH	EDH-OTH-00028	C	82
KCDPFD100H	alias	KCDPFB100-H	EDH-EAT-00423	C	95
KCDPKB	equivalent	BCDPKBCH	EDH-OTH-00030	C	82
KCDPLA400	equivalent	BCDPLACH	EDH-OTH-00032	C	83
KCDPLA600	equivalent	BCDPLCCH	EDH-OTH-00033	C	83
KCDPLB	equivalent	BCDPLBCH	EDH-OTH-00031	C	83
KCDPMA	equivalent	BCDPMACH	EDH-OTH-00034	C	84
KCDPNB	equivalent	BCDPNBCH	EDH-OTH-00035	C	84
KDS4BK	alias	BPRL4BKDSCH	EDH-OTH-00024	C	430
KDS4K	alias	BPRLKDSCH	EDH-OTH-00017	C	432
KFDP-2C	alias	KFDP2C	EDH-FPE-00015	C	1859
KFDP-3C	alias	KFDP3C	EDH-FPE-00016	C	1859
KFDP-46C	alias	KFDP46C	EDH-FPE-00018	C	1860
KFDP-4C	alias	KFDP4C	EDH-FPE-00017	C	1860
KPRL3AED3	equivalent	BPRL3AEDCH	EDH-OTH-00010	C	325
KPRL3AFD3	equivalent	BPRL3AFDCH	EDH-OTH-00009	C	325
KPRL45X	supersedes	KPRL45X1	EDH-EAT-00332	C	423
KPRL45X1	superseded_by	KPRL45X	EDH-EAT-00333	C	422
KPRL4CA	equivalent	BPRLCACH	EDH-OTH-00013	C	431
KPRL4ED	supersedes	KPRL4X32	EDH-EAT-00301	C	461
KPRL4ED	equivalent	BPRLEDCH	EDH-OTH-00012	C	431
KPRL4ED	equivalent	BPRL4BEDCH	EDH-OTH-00022	C	429
KPRL4ED2	supersedes	KPRL4X22	EDH-EAT-00300	C	460
KPRL4FD	supersedes	KPRL4X32	EDH-EAT-00301	C	461
KPRL4FD	equivalent	BPRLFDCH	EDH-OTH-00011	C	431
KPRL4FD	equivalent	BPRL4BFDCH	EDH-OTH-00021	C	429
KPRL4FD1	supersedes	KPRL4X12	EDH-EAT-00299	C	459
KPRL4FD2	supersedes	KPRL4X22	EDH-EAT-00300	C	460
KPRL4FDPBS324R	equivalent	FDPBS324R	EDH-EAT-01207	B	492
KPRL4FDPBS364R	equivalent	FDPBS364R	EDH-EAT-01208	B	493
KPRL4FDPBT3244R	equivalent	FDPBT3244R	EDH-EAT-01209	B	494
KPRL4FDPBT3644R	equivalent	FDPBT3644R	EDH-EAT-01210	B	494
KPRL4FDPW325R	equivalent	FDPW325R	EDH-EAT-01211	B	494
KPRL4FDPW326R	equivalent	FDPW326R	EDH-EAT-01213	B	495

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
KPRL4FDPW327	equivalent	FDPW327	EDH-EAT-01215	B	496
KPRL4FDPW328	equivalent	FDPW328	EDH-EAT-01217	B	496
KPRL4FDPW365R	equivalent	FDPW365R	EDH-EAT-01212	B	496
KPRL4FDPW366R	equivalent	FDPW366R	EDH-EAT-01214	B	497
KPRL4FDPW367	equivalent	FDPW367	EDH-EAT-01216	B	498
KPRL4FDPW368	equivalent	FDPW368	EDH-EAT-01218	B	499
KPRL4FDPWT3211R	equivalent	FDPWT3211R	EDH-EAT-01201	B	500
KPRL4FDPWT3222R	equivalent	FDPWT3222R	EDH-EAT-01203	B	501
KPRL4FDPWT3233R	equivalent	FDPWT3233R	EDH-EAT-01205	B	502
KPRL4FDPWT3611R	equivalent	FDPWT3611R	EDH-EAT-01202	B	503
KPRL4FDPWT3622R	equivalent	FDPWT3622R	EDH-EAT-01204	B	504
KPRL4FDPWT3633R	equivalent	FDPWT3633R	EDH-EAT-01206	B	505
KPRL4JDS	equivalent	BPRLJDSCH	EDH-OTH-00015	C	432
KPRL4JDS	equivalent	BPRL4BJDSCH	EDH-OTH-00023	C	430
KPRL4JDT	equivalent	BPRLJDTCH	EDH-OTH-00014	C	432
KPRL4KDS	equivalent	BPRLKDSCH	EDH-OTH-00017	C	432
KPRL4KDS	equivalent	BPRL4BKDSCH	EDH-OTH-00024	C	430
KPRL4KDT	equivalent	BPRLKDTCH	EDH-OTH-00016	C	433
KPRL4LC	superseded_by	KPRL4LD	EDH-EAT-00330	C	452
KPRL4LD	supersedes	KPRL4LC	EDH-EAT-00314	C	450
KPRL4LD	equivalent	BPRLLDCH	EDH-OTH-00018	C	433
KPRL4LDS	equivalent	BPRL4BLDSCH	EDH-OTH-00025	C	430
KPRL4MC	supersedes	KPRL4X34	EDH-EAT-00305	C	464
KPRL4MD	equivalent	BPRLMDCH	EDH-OTH-00019	C	434
KPRL4ND	supersedes	KPRL4X35	EDH-EAT-00306	C	465
KPRL4ND	equivalent	BPRLNDCH	EDH-OTH-00020	C	434
KPRL4X12	superseded_by	KPRL4FD1	EDH-EAT-00325	C	442
KPRL4X22	superseded_by	KPRL4FD2	EDH-EAT-00326	C	443
KPRL4X22	superseded_by	KPRL4ED2	EDH-EAT-00327	C	438
KPRL4X32	superseded_by	KPRL4FD	EDH-EAT-00328	C	441
KPRL4X32	superseded_by	KPRL4ED	EDH-EAT-00329	C	437
KPRL4X34	superseded_by	KPRL4MC	EDH-EAT-00316	C	455
KPRL4X35	superseded_by	KPRL4ND	EDH-EAT-00321	C	458
KS3VA52T / KS3VA52TD = panel-builder versions without nut keepers and provision filler plates	equivalent	S3VA52T	EDH-SIE-00129	A	1527
KS3VA52T / KS3VA52TD = panel-builder versions without nut keepers and provision filler plates	equivalent	S3VA52TD	EDH-SIE-00156	A	1528
KS3VA53T / KS3VA53TD panel-builder versions (no nut keepers / provision filler)	equivalent	S3VA53T	EDH-SIE-00135	A	1529
KS3VA53T / KS3VA53TD panel-builder versions (no nut keepers / provision filler)	equivalent	S3VA53TD	EDH-SIE-00161	A	1530
KS3VA54T / KS3VA54TD panel-builder versions	equivalent	S3VA54T	EDH-SIE-00142	A	1531
KS3VA54T / KS3VA54TD panel-builder versions	equivalent	S3VA54TD	EDH-SIE-00168	A	1531
LA4K	alias	BPRLLDCH	EDH-OTH-00018	C	433
LA4K	alias	BCDPLACH	EDH-OTH-00032	C	83
LA6K	alias	BCDPLCCH	EDH-OTH-00033	C	83
LB1K	alias	BCDPLBCH	EDH-OTH-00031	C	83
LD1-E060	alias	LD1E060	EDH-SIE-00260	A	1759

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
LD1-E100	alias	LD1E100	EDH-SIE-00261	A	1760
LD65K	alias	BLDITE	EDH-OTH-00059	C	1716
LDS4BK	alias	BPRL4BLDSCH	EDH-OTH-00025	C	430
LN1-E100	alias	LN1E100	EDH-SIE-00258	A	1760
LNLK30A	supersedes	LNLK4X11B	EDH-SIE-00035	A	1645
LNLK42A	supersedes	LNLK6X17B	EDH-SIE-00036	A	1646
LNLK54A	supersedes	LNLK7X20B	EDH-SIE-00037	A	1648
LT2036F	equivalent	LT2036S	EDH-EAT-01053	A	274
LT2042F	equivalent	LT2042S	EDH-EAT-01055	A	274
LT2048F	equivalent	LT2048S	EDH-EAT-01057	A	274
LT2060F	equivalent	LT2060S	EDH-EAT-01059	A	275
LT2072F	equivalent	LT2072S	EDH-EAT-01061	A	275
LT2090F	equivalent	LT2090S	EDH-EAT-01063	A	275
LTDD2036S	equivalent	LT2036S	EDH-EAT-01053	B	274
LTDD2042S	equivalent	LT2042S	EDH-EAT-01055	B	274
LTDD2048S	equivalent	LT2048S	EDH-EAT-01057	B	274
LTDD2060S	equivalent	LT2060S	EDH-EAT-01059	B	275
LTDD2072S	equivalent	LT2072S	EDH-EAT-01061	B	275
LTDD2090S	equivalent	LT2090S	EDH-EAT-01063	B	275
LTF2036S	equivalent	LT2036S	EDH-EAT-01053	B	274
LTF2042S	equivalent	LT2042S	EDH-EAT-01055	B	274
LTF2048S	equivalent	LT2048S	EDH-EAT-01057	B	274
LTF2060S	equivalent	LT2060S	EDH-EAT-01059	B	275
LTF2072S	equivalent	LT2072S	EDH-EAT-01061	B	275
LTF2090S	equivalent	LT2090S	EDH-EAT-01063	B	275
LTV2036S	equivalent	LT2036S	EDH-EAT-01053	B	274
LTV2042S	equivalent	LT2042S	EDH-EAT-01055	B	274
LTV2048S	equivalent	LT2048S	EDH-EAT-01057	B	274
LTV2060S	equivalent	LT2060S	EDH-EAT-01059	B	275
LTV2072S	equivalent	LT2072S	EDH-EAT-01061	B	275
LTV2090S	equivalent	LT2090S	EDH-EAT-01063	B	275
LX-26TS	alias	LX-26TF	EDH-SQD-00819	A	891
LX-32TS	alias	LX-32TF	EDH-SQD-00820	A	891
LX-40TF / LX-40TS	alias	LX40TS	EDH-SQD-00703	C	854
LX-40TS	alias	LX-40TF	EDH-SQD-00821	A	892
LX-45TF / LX-45TS	alias	LX45TS	EDH-SQD-00704	C	854
LX-45TS	alias	LX-45TF	EDH-SQD-00822	A	892
LX-49TS	alias	LX-49TF	EDH-SQD-00823	A	892
MA8K	alias	BCDPMACH	EDH-OTH-00034	C	84
MBKBC1NBA	supersedes	MBKVA41A	EDH-SIE-00001	A	1621
MBKBC3NBA	supersedes	MBKVA41B	EDH-SIE-00002	A	1622
MBKBL1A	supersedes	MBKVA41A	EDH-SIE-00001	A	1621
MBKBL3A	supersedes	MBKVA41B	EDH-SIE-00002	A	1622
MBKED1*A / MBKED3***A = kit with ED breaker factory-installed**	equivalent	MBKED1A	EDH-SIE-00003	A	1613
MBKED1*A / MBKED3***A = kit with ED breaker factory-installed**	equivalent	MBKED3A	EDH-SIE-00004	A	1614
MBKFD1*A / MBKFD3***A = same kit with FD breaker (amperage ***) factory-installed on barrier**	equivalent	MBKFD1A	EDH-SIE-00007	A	1615

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
MBKFD1*A / MBKFD3***A = same kit with FD breaker (amperage ***) factory-installed on barrier**	equivalent	MBKFD3A	EDH-SIE-00008	A	1615
MBKJD1A	supersedes	MBKJD3B	EDH-SIE-00012	A	1617
MBKJD1*A, MBKJD12***A = JD kits with breaker (amperage ***), incl. bottom-feed variants**	equivalent	MBKJD1A	EDH-SIE-00326	A	1617
MBKJD3A	supersedes	MBKJD3B	EDH-SIE-00012	A	1617
MBKJD3*A, MBKJD32***A = JD kits with breaker (amperage ***), incl. bottom-feed variants**	equivalent	MBKJD3A	EDH-SIE-00327	A	1617
MBKQJ1*A**	equivalent	MBKQJ1A	EDH-SIE-00443	A	1618
MBKQJ3*A**	equivalent	MBKQJ3A	EDH-SIE-00444	A	1619
MBKQR*1A**	equivalent	MBKQR1A	EDH-SIE-00005	A	1619
MBKQR*3A**	equivalent	MBKQR3A	EDH-SIE-00006	A	1620
MBKVA5262B (strap kit without breaker)	equivalent	MBKVAM3150A	EDH-SIE-00368	A	1626
MBKVA5262B (strap kit without breaker)	equivalent	MBKVAM3200A	EDH-SIE-00369	A	1626
MBKVA5262B (strap kit without breaker)	equivalent	MBKVAM3225A	EDH-SIE-00370	A	1627
MBKVA5262B (strap kit without breaker)	equivalent	MBKVAM3250A	EDH-SIE-00371	A	1627
MBKVA5262B (strap kit without breaker)	equivalent	MBKVAH3200A	EDH-SIE-00372	A	1625
MBKVA5262B (strap kit without breaker)	equivalent	MBKVAH3250A	EDH-SIE-00373	A	1626
MD4K	alias	BPRLMDCH	EDH-OTH-00019	C	434
MDC-38TS	alias	MDC-38TF	EDH-SQD-00809	A	893
MDC-41TS	alias	MDC-41TF	EDH-SQD-00810	A	893
MDC-50TS	alias	MDC-50TF	EDH-SQD-00811	A	893
MDC-53TS	alias	MDC-53TF	EDH-SQD-00812	A	894
Mechanical: 100 A G01-G04, 250-600 A G13-G16; Crimp: 100 A G05-G08, 250-600 A G17-G20; Copper lugs: 100 A G09-G12, 250-600 A G21-G24 (order tin Al / bare Cu / silver Cu / tin Cu)	style_number	5078A98	EDH-EAT-00220	A	371
Mechanical main lugs/main breakers: 100-225 A G01 (tin Al) G02 (bare Cu) G03 (silver Cu) G04 (tin Cu); 400-600 A G05-G08. Crimp main lugs: 100-225 A G09-G12; 400-600 A G13-G16. Copper main lugs: 100-225 A G18-G20; 400-600 A G22-G24	style_number	4180B62	EDH-EAT-00219	A	287
MH26BE	alias	MH26	EDH-SQD-00633	A	861
MH32BE	alias	MH32	EDH-SQD-00635	A	861
MH38BE	alias	MH38	EDH-SQD-00637	A	862
MH44BE	alias	MH44	EDH-SQD-00639	A	863
MH50BE	alias	MH50	EDH-SQD-00640	A	863
MH56BE	alias	MH56	EDH-SQD-00642	A	864
MH62BE	alias	MH62	EDH-SQD-00644	A	865
MH68BE	alias	MH68	EDH-SQD-00646	A	866
MH74BE	alias	MH74	EDH-SQD-00647	A	867
MH80BE	alias	MH80	EDH-SQD-00649	A	868
MH86BE	alias	MH86	EDH-SQD-00650	A	869
MLKA1	equivalent	MLKA1A	EDH-SIE-00015	A	1631

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
MLKA3	equivalent	MLKA3A	EDH-SIE-00016	A	1632
MLKC1	equivalent	MLKC1A	EDH-SIE-00017	A	1633
MLKC3	equivalent	MLKC3A	EDH-SIE-00018	A	1633
MP40ED2253	alias	MP40ED225-3	EDH-EAT-00889	C	140
MP40KC225-2H	alias	MP40KC225-2	EDH-EAT-00972	A	140
MP40KC2253	alias	MP40KC225-3	EDH-EAT-00888	C	75
MP40KC225-3H	alias	MP40KC225-3	EDH-EAT-00888	A	75
MP40KCHH225-2H	alias	MP40KCHH225-2	EDH-EAT-00973	A	141
MP40KCHH225-3H	alias	MP40KCHH225-3	EDH-EAT-00974	A	141
MP40KF100-2H	alias	MP40KF100-2	EDH-EAT-00969	A	142
MP40KF1003	alias	MP40KF100-3	EDH-EAT-00887	C	76
MP40KF225-2H	alias	MP40KF225-2	EDH-EAT-00970	A	142
MP40KF225-3H	alias	MP40KF225-3	EDH-EAT-00971	A	143
MP40KJ2253	alias	MP40KJ225-3	EDH-EAT-00890	C	77
MP40KJ225-3H	alias	MP40KJ225-3	EDH-EAT-00890	A	77
MP40KK4003	alias	MP40KK400-3	EDH-EAT-00891	C	77
MP40KK400-3H	alias	MP40KK400-3	EDH-EAT-00891	A	77
MP40KL4003	alias	MP40KL400-3	EDH-EAT-00892	C	143
MP40KL600-3H	alias	MP40KL600-3	EDH-EAT-00893	A	78
MP40KLL400-3H	alias	MP40KLL400-3	EDH-EAT-00975	A	144
MP40KM8003	alias	MP40KM800-3	EDH-EAT-00894	C	79
MP40KM800-3H	alias	MP40KM800-3	EDH-EAT-00894	A	79
MP40KN12003	alias	MP40KN1200-3	EDH-EAT-00895	C	80
MP40KN1200-3H	alias	MP40KN1200-3	EDH-EAT-00895	A	80
MSC-23TS	alias	MSC-23TF	EDH-SQD-00813	A	894
MSC-26TS	alias	MSC-26TF	EDH-SQD-00814	A	894
MSC-29TS	alias	MSC-29TF	EDH-SQD-00815	A	895
MSC-35TS	alias	MSC-35TF	EDH-SQD-00816	A	895
MSC-38TS	alias	MSC-38TF	EDH-SQD-00817	A	895
MSC-44TS	alias	MSC-44TF	EDH-SQD-00818	A	896
MSE6100	alias	MSE6-100	EDH-SIE-00471	A	1765
MSF650	alias	MSF6-50	EDH-SIE-00480	A	1771
NB12K	alias	BCDPNBCH	EDH-OTH-00035	C	84
NC26F	alias	NC26	EDH-SQD-00681	A	854
NC26FHR / NC26SHR	alias	NC26	EDH-SQD-00681	A	854
NC26S	alias	NC26	EDH-SQD-00681	A	854
NC32F	alias	NC32	EDH-SQD-00682	A	855
NC32FHR / NC32SHR	alias	NC32	EDH-SQD-00682	A	855
NC32S	alias	NC32	EDH-SQD-00682	A	855
NC38F	alias	NC38	EDH-SQD-00683	A	855
NC38FHR / NC38SHR	alias	NC38	EDH-SQD-00683	A	855
NC38S	alias	NC38	EDH-SQD-00683	A	855
NC44F	alias	NC44	EDH-SQD-00684	A	855
NC44FHR / NC44SHR	alias	NC44	EDH-SQD-00684	A	855
NC44S	alias	NC44	EDH-SQD-00684	A	855
NC50F	alias	NC50	EDH-SQD-00685	A	855
NC50FHR / NC50SHR	alias	NC50	EDH-SQD-00685	A	855
NC50S	alias	NC50	EDH-SQD-00685	A	855
NC50V( )3P / NC50V( )3PHR	alias	NC50V	EDH-SQD-00686	A	856
NC50VF / NC50VS	alias	NC50V	EDH-SQD-00686	A	856
NC50V( )HR	alias	NC50V	EDH-SQD-00686	A	856
NC56V( )3P / NC56V( )3PHR	alias	NC56V	EDH-SQD-00687	A	856

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
NC56VF / NC56VS	alias	NC56V	EDH-SQD-00687	A	856
NC56V( )HR	alias	NC56V	EDH-SQD-00687	A	856
NC62V( )3P / NC62V( )3PHR	alias	NC62V	EDH-SQD-00688	A	856
NC62VF3PNF	alias	NC62VS3PNF	EDH-SQD-00693	A	812
NC62VF3PNFHR	alias	NC62VS3PNF	EDH-SQD-00693	A	812
NC62VF / NC62VS	alias	NC62V	EDH-SQD-00688	A	856
NC62V( )HR	alias	NC62V	EDH-SQD-00688	A	856
NC62VS3PNFHR	alias	NC62VS3PNF	EDH-SQD-00693	A	812
NC68V( )3P / NC68V( )3PHR	alias	NC68V	EDH-SQD-00689	A	857
NC68VF3PNF	alias	NC68VS3PNF	EDH-SQD-00694	A	812
NC68VF3PNFHR	alias	NC68VS3PNF	EDH-SQD-00694	A	812
NC68VF / NC68VS	alias	NC68V	EDH-SQD-00689	A	857
NC68V( )HR	alias	NC68V	EDH-SQD-00689	A	857
NC68VS3PNFHR	alias	NC68VS3PNF	EDH-SQD-00694	A	812
NC74V( )3P / NC74V( )3PHR	alias	NC74V	EDH-SQD-00690	A	857
NC74VF3PNF	alias	NC74VS3PNF	EDH-SQD-00695	A	812
NC74VF3PNFHR	alias	NC74VS3PNF	EDH-SQD-00695	A	812
NC74VF / NC74VS	alias	NC74V	EDH-SQD-00690	A	857
NC74V( )HR	alias	NC74V	EDH-SQD-00690	A	857
NC74VS3PNFHR	alias	NC74VS3PNF	EDH-SQD-00695	A	812
NC80V( )3P / NC80V( )3PHR	alias	NC80V	EDH-SQD-00691	A	857
NC80VF3PNF	alias	NC80VS3PNF	EDH-SQD-00696	A	813
NC80VF3PNFHR	alias	NC80VS3PNF	EDH-SQD-00696	A	813
NC80VF / NC80VS	alias	NC80V	EDH-SQD-00691	A	857
NC80V( )HR	alias	NC80V	EDH-SQD-00691	A	857
NC80VS3PNFHR	alias	NC80VS3PNF	EDH-SQD-00696	A	813
NC86V( )3P / NC86V( )3PHR	alias	NC86V	EDH-SQD-00692	A	858
NC86VF3PNF	alias	NC86VS3PNF	EDH-SQD-00697	A	813
NC86VF3PNFHR	alias	NC86VS3PNF	EDH-SQD-00697	A	813
NC86VF / NC86VS	alias	NC86V	EDH-SQD-00692	A	858
NC86V( )HR	alias	NC86V	EDH-SQD-00692	A	858
NC86VS3PNFHR	alias	NC86VS3PNF	EDH-SQD-00697	A	813
NC92VF3PNF	alias	NC92VS3PNF	EDH-SQD-00698	A	813
NC92VF3PNFHR	alias	NC92VS3PNF	EDH-SQD-00698	A	813
NC92VS3PNFHR	alias	NC92VS3PNF	EDH-SQD-00698	A	813
ND4K	alias	BPRLNDCH	EDH-OTH-00020	C	434
ND65K	alias	BMDITE	EDH-OTH-00060	C	1716
NEB64K	alias	BSEBP4	EDH-OTH-00065	C	1523
NEF1K	alias	BCDPNEF10FPE	EDH-OTH-00002	C	1853
NEF1K (PCS aftermarket; Breaker King SKU BCDPNEF10FPE)	equivalent	KCDP1C	EDH-FPE-00001	C	1855
NEF3K	alias	BBDPNEF10FPE	EDH-OTH-00006	C	1848
NEF3K (PCS aftermarket assembly; Breaker King SKU BBDPNEF10FPE)	equivalent	KBDP1C	EDH-FPE-00007	C	1850
NEJ1K	alias	BCDPNEJFPE	EDH-OTH-00003	C	1854
NEJ1K (PCS aftermarket; Breaker King SKU BCDPNEJFPE)	equivalent	KCDP2C	EDH-FPE-00002	C	1856
NEJ3K	alias	BBDPNEJFPE	EDH-OTH-00007	C	1849
NEJ3K (PCS aftermarket; Breaker King SKU BBDPNEJFPE)	equivalent	KBDP2C	EDH-FPE-00008	C	1850

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
NFJ1K	alias	BCDPNFJFPE	EDH-OTH-00004	C	1854
NFJ1K (PCS aftermarket; Breaker King SKU BCDPNFJFPE)	equivalent	KCDP3C	EDH-FPE-00003	C	1856
NFJ3K (PCS aftermarket, 225 A max) - probable equivalent by numbering pattern	equivalent	KBDP3C	EDH-FPE-00009	D	1851
NFNL6CR	equivalent	NFN6CR	EDH-SQD-00116	A	806
NFRPLMB63RPPL	equivalent	NFRPLMB6PPL	EDH-SQD-00112	A	810
NHB150PK	equivalent	BNHB150GE	EDH-OTH-00036	C	1150
NJL1K	alias	BCDPNJLFPE	EDH-OTH-00005	C	1855
NJL1K (PCS aftermarket; Breaker King SKU BCDPNJLFPE)	equivalent	KCDP4C	EDH-FPE-00004	C	1857
NJL3K	alias	BBDPNJLFPE	EDH-OTH-00008	C	1849
NJL3K (PCS aftermarket; Breaker King SKU BBDPNJLFPE)	equivalent	KBDP4C	EDH-FPE-00010	C	1851
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C04G01	EDH-EAT-00240	A	174
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G02	EDH-EAT-00438	A	173
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G01	EDH-EAT-00439	A	173
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G04	EDH-EAT-00440	A	173
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G03	EDH-EAT-00441	A	173
NQC20F / NQC20S	alias	NQC20	EDH-SQD-00746	A	913
NQC-20TS	alias	NQC-20TF	EDH-SQD-00802	A	896
NQC23F / NQC23S	alias	NQC23	EDH-SQD-00747	A	913
NQC-24TS	alias	NQC-24TF	EDH-SQD-00803	A	896
NQC26F / NQC26S	alias	NQC26	EDH-SQD-00748	A	913
NQC-28TS	alias	NQC-28TF	EDH-SQD-00804	A	897
NQC29F / NQC29S	alias	NQC29	EDH-SQD-00749	A	913
NQC32F / NQC32S	alias	NQC32	EDH-SQD-00750	A	858
NQC-32TS	alias	NQC-32TF	EDH-SQD-00805	A	897
NQC35F / NQC35S	alias	NQC35	EDH-SQD-00751	A	913
NQC-37TS	alias	NQC-37TF	EDH-SQD-00806	A	897
NQC38F / NQC38S	alias	NQC38	EDH-SQD-00752	A	858
NQC41F / NQC41S	alias	NQC41	EDH-SQD-00753	A	914
NQC-42TS	alias	NQC-42TF	EDH-SQD-00807	A	898
NQC44F / NQC44S	alias	NQC44	EDH-SQD-00754	A	858
NQC-48TS	alias	NQC-48TF	EDH-SQD-00808	A	898
NQC50F / NQC50S	alias	NQC50	EDH-SQD-00755	A	859
NQC56F / NQC56S	alias	NQC56	EDH-SQD-00756	A	914
NQCUMN6	equivalent	NQALMN6	EDH-SQD-00028	A	836
NQMB2HJ14	equivalent	NQMB2HJ	EDH-SQD-00003	A	820
NQMB2Q14	equivalent	NQMB2Q	EDH-SQD-00001	A	821
NQN6CR / NQNL6CR	alias	NQN6CRUS	EDH-SQD-00027	A	839
NQNL6CRUS	equivalent	NQN6CRUS	EDH-SQD-00027	A	839
NQODQ2	supersedes	NQODQB	EDH-SQD-00911	A	905

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
NQRPLMB63RPPL	equivalent	NQRPLMB6PPL	EDH-SQD-00062	A	852
NQSFL4L	equivalent	NQSFL4	EDH-SQD-00010	A	833
PH6C3	equivalent	BPHCCH	EDH-OTH-00027	C	159
PH6CK	alias	BPHCCH	EDH-OTH-00027	C	159
PH6E3	equivalent	BPHECH	EDH-OTH-00026	C	159
PH6EK	alias	BPHECH	EDH-OTH-00026	C	159
PJC7201	alias	PJC-7201	EDH-SQD-00150	A	774
PK-23GTA	alias	PK23GTA	EDH-SQD-00129	A	843
PK-27GTA	alias	PK27GTA	EDH-SQD-00123	A	844
PK-32DGTA	alias	PK32DGTA	EDH-SQD-00130	A	735
PK4FL	supersedes	PK22FL	EDH-SQD-00609	A	923
PT363 top H01 / bottom H02 (7X); PT364 top H03 / bottom H04 (9X)	style_number	4180B79	EDH-EAT-00266	A	366
Q15	equivalent	UBIZ15	EDH-OTH-00108	C	1881
Q20	equivalent	UBIZ20	EDH-OTH-00109	C	1883
Q30	equivalent	UBIZ30	EDH-OTH-00110	C	1889
QC20	equivalent	UBIZ220	EDH-OTH-00111	C	1885
QC30	equivalent	UBIZ230	EDH-OTH-00112	C	1885
QC40	equivalent	UBIZ240	EDH-OTH-00113	C	1886
QC50	equivalent	UBIZ250	EDH-OTH-00114	C	1886
QCAL100	equivalent	UBIZ2100	EDH-OTH-00119	C	1884
QCAL125	equivalent	UBIZ2125	EDH-OTH-00120	C	1884
QCAL60	equivalent	UBIZ260	EDH-OTH-00115	C	1887
QCAL70	equivalent	UBIZ270	EDH-OTH-00116	C	1887
QCAL80	equivalent	UBIZ280	EDH-OTH-00117	C	1888
QCAL90	equivalent	UBIZ290	EDH-OTH-00118	C	1888
QF3	equivalent	DFFP1A	EDH-SIE-00062	A	1672
QJ64K	alias	BQJSITE	EDH-OTH-00062	C	1523
QJ65K	alias	BQJITE	EDH-OTH-00055	C	1717
QM-2SN	equivalent	QMB2SN	EDH-SQD-00881	C	931
QM-4SN	equivalent	QMB4SN	EDH-SQD-00882	C	931
QM-6SN	equivalent	QMB6SN	EDH-SQD-00883	C	932
QMB200EK-1	alias	QMB200EK	EDH-SQD-00282	A	974
QMB200EK-2	alias	QMB200EK	EDH-SQD-00282	A	974
QMB300EK-1	alias	QMB300EK	EDH-SQD-00280	A	975
QMB300EK-2	alias	QMB300EK	EDH-SQD-00280	A	975
QMB-306-EX	alias	QMB306EX	EDH-SQD-00326	A	938
QMB-310-EX	alias	QMB310EX	EDH-SQD-00328	A	938
QMB-320-EX	alias	QMB320EX	EDH-SQD-00330	A	939
QMB321T	superseded_by	QMB3203T	EDH-SQD-00899	A	988
QMB322TD	alias	QMB322TW	EDH-SQD-00232	C	953
QMB323M	superseded_by	QMB3210M	EDH-SQD-00903	A	989
QMB323TD	alias	QMB323TW	EDH-SQD-00234	C	955
QMB324	superseded_by	QMB3220	EDH-SQD-00900	A	989
QMB324M	superseded_by	QMB3220M	EDH-SQD-00904	A	989
QMB361T	superseded_by	QMB3603T	EDH-SQD-00901	A	989
QMB362T	alias	QMB362TW	EDH-SQD-00251	C	962
QMB363M	superseded_by	QMB3610M	EDH-SQD-00905	A	990
QMB363MJ	superseded_by	QMB3610MJ	EDH-SQD-00906	A	990
QMB363T	superseded_by	QMB3610T	EDH-SQD-00902	A	990
QMB364	superseded_by	QMB3620	EDH-SQD-00322	A	993
QMB364M	superseded_by	QMB3620M	EDH-SQD-00907	A	990

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
QMB364MJ	superseded_by	QMB3620MJ	EDH-SQD-00908	A	990
QMB610EK-1	alias	QMB610EK	EDH-SQD-00281	A	976
QMB610EK-2	alias	QMB610EK	EDH-SQD-00281	A	976
QOFSBF	alias	QOFSBF12	EDH-SQD-00578	A	853
QOFSHALB	alias	QOFSHALB12	EDH-SQD-00580	A	882
QOFSLALB	alias	QOFSLALB12	EDH-SQD-00579	A	882
R3815	equivalent	UBIZ1515	EDH-OTH-00121	C	1882
R381520	equivalent	UBIZ1520	EDH-OTH-00122	C	1882
R3820	equivalent	UBIZ2020	EDH-OTH-00123	C	1883
R3830	equivalent	UBIZ3030	EDH-OTH-00124	C	1889
RC3820	equivalent	UBIZ0220	EDH-OTH-00125	C	1879
RC3830	equivalent	UBIZ0230	EDH-OTH-00126	C	1879
RC3840	equivalent	UBIZ0240	EDH-OTH-00127	C	1880
RC3850	equivalent	UBIZ0250	EDH-OTH-00128	C	1880
RC3860	equivalent	UBIZ0260	EDH-OTH-00129	C	1881
RPC2457	alias	RPCB2457	EDH-EAT-01118	A	487
RPC2473	alias	RPCB2473	EDH-EAT-01120	A	487
RPC2490	alias	RPCB2490	EDH-EAT-01122	A	487
RPC3673	alias	RPCB3673	EDH-EAT-01124	A	487
RPC3690	alias	RPCB3690	EDH-EAT-01126	A	488
S29348	alias	29348	EDH-SQD-00383	D	1046
S32508	alias	32508	EDH-SQD-00468	D	1020
S32510	alias	32510	EDH-SQD-00469	D	1021
SA1-E025	alias	SA1E025	EDH-SIE-00257	A	1761
Same H scheme as 6554C01 (4X = H13, 5X = H14)	style_number	6554C02	EDH-EAT-00295	A	476
SE6	equivalent	BEDSITE	EDH-OTH-00061	C	1522
SE6D	equivalent	BEDITE	EDH-OTH-00054	C	1713
SEB	equivalent	BSEBP4	EDH-OTH-00065	C	1523
SED1K	alias	BAMCB6EBGE	EDH-OTH-00049	C	1247
SEY1K	alias	BAMCB6EYGE	EDH-OTH-00050	C	1247
SF2DPK1,2	alias	SF2DPK	EDH-GEA-00262	A	1115
SF6	equivalent	BFDSITE	EDH-OTH-00063	C	1522
SF6D	equivalent	BFDITE	EDH-OTH-00056	C	1714
SFD1K	alias	BAMCB6FJGE	EDH-OTH-00052	C	1247
SFS1K	alias	BAMCB3FJGE	EDH-OTH-00046	C	1246
SG1BCK4 (as printed 2019)	alias	SG1BCK	EDH-GEA-00351	B	1444
SG6DPK	equivalent	BSGDGE	EDH-OTH-00043	C	1112
SGD1K	alias	BAMCB6GBGE	EDH-OTH-00053	C	1248
SGD6K	alias	BSGDGE	EDH-OTH-00043	C	1112
SGS1K	alias	BAMCB3GMGE	EDH-OTH-00047	C	1246
SJ1	equivalent	BJDSITE	EDH-OTH-00064	C	1522
SJ1D	equivalent	BJDSGLITE	EDH-OTH-00057	C	1715
SJ2D	equivalent	BJDITE	EDH-OTH-00058	C	1714
SK12SPK3	alias	SK12SPK	EDH-GEA-00266	A	1116
SK1LCK3 (as printed 2019)	alias	SK1LCK	EDH-GEA-00352	B	1449
SK4515	equivalent	BSK4515	EDH-OTH-00068	C	784
SK4516	equivalent	BSK4516	EDH-OTH-00069	C	785
SK4517	equivalent	BSK4517	EDH-OTH-00070	C	785
SK4578	equivalent	BSK4578	EDH-OTH-00071	C	785
SK8SPK3	alias	SK8SPK	EDH-GEA-00265	A	1116
SKLVK6 / SKLVK8 (as printed)	alias	SKLVK	EDH-GEA-00333	B	1423

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
SKS1K	alias	BAMCB35KMGE	EDH-OTH-00048	C	1246
SL-100	alias	SL100	EDH-SQD-00218	A	708
SL-225	alias	SL-225	EDH-SQD-00563	A	710
SL-400	alias	SL400	EDH-SQD-00211	A	711
SL6D	equivalent	BLDITE	EDH-OTH-00059	C	1716
SL-800	alias	SL800	EDH-SQD-00358	A	712
SMND	equivalent	BMDITE	EDH-OTH-00060	C	1716
SMSKHCPP	alias	SMSKHCP	EDH-SIE-00468	D	1562
SQD1K	alias	BAMCB6QDGE	EDH-OTH-00051	C	1248
SQJ	equivalent	BQJSITE	EDH-OTH-00062	C	1523
SQJD	equivalent	BQJITE	EDH-OTH-00055	C	1717
STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	style_number	42C4050	EDH-EAT-00222	A	240
STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	style_number	1C96645	EDH-EAT-00233	A	237
STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	style_number	42C4051	EDH-EAT-00226	A	241
STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2	style_number	1C96653	EDH-EAT-00231	A	239
STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	style_number	42C4052	EDH-EAT-00230	A	241
STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil	style_number	1C96650	EDH-EAT-00227	A	238
STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	style_number	1C97022	EDH-EAT-00234	A	240
STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil	style_number	1C96647	EDH-EAT-00223	A	237
STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	style_number	1C96646	EDH-EAT-00221	A	237
STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	style_number	1C96649	EDH-EAT-00225	A	238
STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	style_number	1C96654	EDH-EAT-00232	A	240
STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	style_number	1C96648	EDH-EAT-00224	A	238
STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	style_number	1C96651	EDH-EAT-00228	A	239
TA1-L6750	alias	TA1L6750	EDH-SIE-00273	A	1775
TA2-J6500	alias	TA2J6500	EDH-SIE-00269	A	1776
TA2-J6500T10	alias	TA2J6500T10	EDH-SIE-00486	A	1773
TA401LD	alias	2TA401LDK	EDH-EAT-00500	D	609
TA401LD	alias	3TA401LDK	EDH-EAT-00501	D	611
TA401LD	alias	4TA401LDK	EDH-EAT-00502	D	614
TA603LD	alias	2TA603LDK	EDH-EAT-00505	D	610
TA603LD	alias	3TA603LDK	EDH-EAT-00506	D	612
TA603LD	alias	4TA603LDK	EDH-EAT-00507	D	614
TB1SPK3	alias	TB1SPK	EDH-GEA-00954	A	1117
TB6SPK3	alias	TB6SPK	EDH-GEA-00955	A	1118
TB8SPK3	alias	TB8SPK	EDH-GEA-00594	A	1118
TC0416 / TC0414	alias	TC041	EDH-GEA-00303	B	1410

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
TC1-J6600	alias	TC1J6600	EDH-SIE-00271	A	1777
TC2-J6500	alias	TC2J6500	EDH-SIE-00272	A	1777
TCAL1214 / TCAL1212	alias	TCAL121	EDH-GEA-00312	B	1412
TCAL1225 / TCAL1223	alias	TCAL122	EDH-GEA-00316	B	1412
TCAL1314 / TCAL1312	alias	TCAL131	EDH-GEA-00322	B	1413
TCAL433	alias	TCAL43	EDH-GEA-00292	B	1396
TCAL812 / TCAL811	alias	TCAL81	EDH-GEA-00308	B	1414
TCAL912 / TCAL911	alias	TCAL91	EDH-GEA-00319	B	1414
TCALK21214 / TCALK21212	alias	TCALK2121	EDH-GEA-00313	B	1405
TCALK21225 / TCALK21223	alias	TCALK2122	EDH-GEA-00317	B	1405
TCALK2812 / TCALK2811	alias	TCALK281	EDH-GEA-00309	B	1406
TCALK2912 / TCALK2911	alias	TCALK291	EDH-GEA-00320	B	1406
TCALK31214 / TCALK31212	alias	TCALK3121	EDH-GEA-00314	B	1407
TCALK31225 / TCALK31223	alias	TCALK3122	EDH-GEA-00318	B	1407
TCALK3812 / TCALK3811	alias	TCALK381	EDH-GEA-00310	B	1408
TCALK3912 / TCALK3911	alias	TCALK391	EDH-GEA-00321	B	1408
TCLK2652 / TCLK2651 (as printed)	alias	TCLK265	EDH-GEA-00339	B	1442
TCLK3652 / TCLK3653 / TCLK3654 (as printed)	alias	TCLK365	EDH-GEA-00340	B	1443
TCO121	alias	TC0121	EDH-GEA-00315	B	1409
TCO18	alias	TC018	EDH-GEA-00354	B	1437
TCO81A	alias	TC081A	EDH-GEA-00311	B	1411
TED1DPK	equivalent	BTEDGE	EDH-OTH-00037	C	1113
TED1K	alias	BTEDGE	EDH-OTH-00037	C	1113
TEL1DPK	equivalent	BTELGE	EDH-OTH-00038	C	1113
TEL1K	alias	BTELGE	EDH-OTH-00038	C	1113
TEY3B1	alias	TEY3B	EDH-GEA-00716	A	1463
TF2DPK	equivalent	BTFKGE	EDH-OTH-00040	C	1113
TFK1K	alias	BTFKGE	EDH-OTH-00040	C	1113
TJ4DPK	equivalent	BTJK4GE	EDH-OTH-00041	C	1114
TJ6DPK	equivalent	BTJK6GE	EDH-OTH-00042	C	1114
TJK4K	alias	BTJK4GE	EDH-OTH-00041	C	1114
TJK6K	alias	BTJK6GE	EDH-OTH-00042	C	1114
TJLVK8 (as printed)	alias	TJLVK	EDH-GEA-00334	B	1404
TK12SPK	equivalent	BTK12GE	EDH-OTH-00045	C	1114
TK12SPK3,4	alias	TK12SPK	EDH-GEA-00264	A	1125
TK8SPK	equivalent	BTK8GE	EDH-OTH-00044	C	1115
TK8SPK3	alias	TK8SPK	EDH-GEA-00263	A	1125
TKL12SPK4	alias	TKL12SPK	EDH-GEA-00956	A	1126
TKM12K	alias	BTK12GE	EDH-OTH-00045	C	1114
TKM8K	alias	BTK8GE	EDH-OTH-00044	C	1115
TQ2DPK	equivalent	BTQDGE	EDH-OTH-00039	C	1115
TQBSI7	alias	TQBSI	EDH-GEA-00719	A	1464
TQCFMP11	alias	TQCFMP1	EDH-GEA-00791	A	1391
TQCFMP21	alias	TQCFMP2	EDH-GEA-00792	A	1392
TQCFMP31	alias	TQCFMP3	EDH-GEA-00793	A	1392
TQCFMP41	alias	TQCFMP4	EDH-GEA-00794	A	1392
TQD1K	alias	BTQDGE	EDH-OTH-00039	C	1115
UPC 621037246102	alias	P41X25	EDH-EAT-00296	A	480
UPC 782113099170	alias	NL300	EDH-EAT-00457	A	27
UPC 782113099439	alias	BINA	EDH-EAT-00456	A	28
UPC 782113526898	alias	3T402K	EDH-EAT-00489	A	581

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
UPC 782113526904	alias	2T402K	EDH-EAT-00488	A	576
UPC 782113526911	alias	4T402K	EDH-EAT-00490	A	588
UPC 782113527369	alias	FJ3RTDK	EDH-EAT-00589	A	680
UPC 782113527383	alias	FJ3RTWK	EDH-EAT-00587	A	681
UPC 782113527390	alias	FJ4RTWK	EDH-EAT-00588	A	682
UPC 782113527406	alias	FJIPBK	EDH-EAT-00568	A	676
UPC 782113527413	alias	FJIPBK4	EDH-EAT-00569	A	677
UPC 782113683874	alias	EF4RTWK	EDH-EAT-00583	A	672
UPC 782113683881	alias	EF4RTDK	EDH-EAT-00586	A	671
UPC 782113683911	alias	3TA150EF	EDH-EAT-00538	A	662
UPC 782113924762	alias	TA250FJ	EDH-EAT-00542	A	674
UPC 782113928739	alias	FJTS3K	EDH-EAT-00566	A	678
UPC 782113928746	alias	FJTS4K	EDH-EAT-00567	A	679
UPC 782114291818	alias	KPEK12	EDH-EAT-00591	A	551
UPC 782114291825	alias	KPEKM12	EDH-EAT-00592	A	553
UPC 782114291832	alias	KPEK1	EDH-EAT-00593	A	551
UPC 782114291849	alias	KPEKM1	EDH-EAT-00594	A	552
UPC 782114291863	alias	KPEKM14	EDH-EAT-00596	A	554
UPC 782114291870	alias	KPEK2	EDH-EAT-00597	A	571
UPC 782114291887	alias	KPEKM2	EDH-EAT-00598	A	572
UPC 782114291900	alias	KPEKM24	EDH-EAT-00600	A	573
UPC 782114373231	alias	FCWTK225	EDH-EAT-00618	A	550
UPC 782114380093	alias	TA800MA2CWT	EDH-EAT-00520	A	632
UPC 782114380109	alias	TA801MACWT	EDH-EAT-00521	A	633
UPC 782114795194	alias	KPRL4W11X	EDH-EAT-00338	A	424
UPC 782114795941	alias	KPRL4FD	EDH-EAT-00328	A	441
UPC 782114795996	alias	KPRL4KDS	EDH-EAT-00312	A	447
UPC 782114796030	alias	KPRL4JDS	EDH-EAT-00309	A	445
UPC 782114796078	alias	KPRL4ND	EDH-EAT-00321	A	458
UPC 782114796115	alias	KPRL4JDT	EDH-EAT-00310	A	446
UPC 782114796184	alias	KPRL44X	EDH-EAT-00331	A	421
UPC 782114796191	alias	KPRL4LC	EDH-EAT-00314	A	450
UPC 782114796207	alias	KPRL45XS	EDH-EAT-00334	A	423
UPC 782114796214	alias	KPRL45X	EDH-EAT-00333	A	422
UPC 782114796412	alias	KPRL4KDT	EDH-EAT-00313	A	448
UPC 782114798195	alias	KPRL4ED	EDH-EAT-00329	A	437
UPC 782114858813	alias	KPRL4LD	EDH-EAT-00330	A	452
UPC 782114858820	alias	KPRL4ED2	EDH-EAT-00327	A	438
UPC 782114887257	alias	KPRL3ABA06	EDH-EAT-00184	A	325
UPC 782114887271	alias	KPRL3ABA06-1	EDH-EAT-00185	A	326
UPC 782114887295	alias	KPRL3ABA12	EDH-EAT-00186	A	327
UPC 782114887301	alias	KPRL3ABA12-1	EDH-EAT-00187	A	328
UPC 782114887318	alias	KPRL3ABA18	EDH-EAT-00188	A	329
UPC 782114887332	alias	KPRL3ABA18-1	EDH-EAT-00189	A	329
UPC 782114887349	alias	KPRL3ABA24	EDH-EAT-00190	A	330
UPC 782114887363	alias	KPRL3AFD2	EDH-EAT-00206	A	333
UPC 782114887370	alias	KPRL3AFD3	EDH-EAT-00205	A	333
UPC 782114887387	alias	KPRL3AGB06	EDH-EAT-00192	A	334
UPC 782114887400	alias	KPRL3AGB12	EDH-EAT-00194	A	336
UPC 782114887417	alias	KPRL3AGB12-1	EDH-EAT-00195	A	337
UPC 782114887424	alias	KPRL3AGB18	EDH-EAT-00196	A	337
UPC 782114887431	alias	KPRL3AGB18-1	EDH-EAT-00197	A	338

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
UPC 782114887448	alias	KPRL3AGB24	EDH-EAT-00198	A	339
UPC 782114887462	alias	KPRL4CA	EDH-EAT-00308	A	434
UPC 782114887479	alias	KPRL4CKD	EDH-EAT-00322	A	435
UPC 782114887493	alias	KPRL4CND	EDH-EAT-00324	A	436
UPC 782114887509	alias	KPRL4FBP	EDH-EAT-00311	A	439
UPC 782114887516	alias	KPRL4FD1	EDH-EAT-00325	A	442
UPC 782114887523	alias	KPRL4FD2	EDH-EAT-00326	A	443
UPC 782114887530	alias	KPRL4LAP	EDH-EAT-00317	A	449
UPC 782114887547	alias	KPRL4LCL	EDH-EAT-00318	A	451
UPC 782114887554	alias	KPRL4MC	EDH-EAT-00316	A	455
UPC 782114887561	alias	KPRL4NBP	EDH-EAT-00319	A	456
UPC 782114895153	alias	FDPBS324R	EDH-EAT-01207	A	492
UPC 782114895160	alias	FDPBS364R	EDH-EAT-01208	A	493
UPC 782114983669	alias	3TA125EF	EDH-EAT-00537	A	661
UPC 782114984185	alias	EFTS3K	EDH-EAT-00570	A	666
UPC 782116008780	alias	FDPBT3244R	EDH-EAT-01209	A	494
UPC 782116029594	alias	FJCWTK	EDH-EAT-00575	A	683
UPC 782116102495	alias	3TA160EFK	EDH-EAT-00539	A	663
UPC 782116122899	alias	LGTEW3	EDH-EAT-00562	A	699
UPC 782116122905	alias	LGTEW4	EDH-EAT-00563	A	700
UPC 782116122912	alias	LGTES3	EDH-EAT-00564	A	697
UPC 782116122929	alias	LGTES4	EDH-EAT-00565	A	698
UPC 782116125456	alias	3TA125E3K	EDH-EAT-00577	A	660
UPC 782116130887	alias	3TA250FJ3	EDH-EAT-00579	A	672
UPC 782116130894	alias	3TA250FJ6	EDH-EAT-00580	A	673
UPC 782116157419	alias	L3RTWK	EDH-EAT-00560	A	695
UPC 782116157426	alias	L4RTWK	EDH-EAT-00561	A	696
UPC 782116165599	alias	3TA631LK	EDH-EAT-00543	A	686
UPC 782116165612	alias	3T631LK	EDH-EAT-00545	A	684
UPC 782116165636	alias	3TA632LK	EDH-EAT-00547	A	687
UPC 782116165643	alias	4TA632LK	EDH-EAT-00548	A	690
UPC 782116165650	alias	3T632LK	EDH-EAT-00549	A	685
UPC 782116165674	alias	TA350LK	EDH-EAT-00551	A	692
UPC 782116165681	alias	T350LK	EDH-EAT-00552	A	691
UPC 782116197941	alias	LTS3K	EDH-EAT-00558	A	693
UPC 782116197958	alias	LTS4K	EDH-EAT-00559	A	694
UPC 782116318490	alias	5155C62H01	EDH-EAT-00253	A	250
UPC 782116484348	alias	KPEK14	EDH-EAT-00595	A	552
UPC 782116654130	alias	KPRL4LG	EDH-EAT-00315	A	454
UPC 782116929740	alias	3TA632LKW	EDH-EAT-00554	A	688
UPC 782116929764	alias	3T632LKW	EDH-EAT-00556	A	686
UPC 782116934195	alias	EZT2036F	EDH-EAT-01013	A	257
UPC 782116934201	alias	EZT2036S	EDH-EAT-01012	A	258
UPC 782116934218	alias	EZT2048F	EDH-EAT-01025	A	259
UPC 782116934225	alias	EZT2048S	EDH-EAT-01024	A	260
UPC 782116934232	alias	EZT2060F	EDH-EAT-01037	A	261
UPC 782116934249	alias	EZT2060S	EDH-EAT-01036	A	262
UPC 782116934256	alias	EZT2072F	EDH-EAT-01043	A	262
UPC 782116934263	alias	EZT2072S	EDH-EAT-01042	A	263
UPC 786676000499	alias	BRLW	EDH-EAT-00459	A	31
UPC 786676001762	alias	BRSF125	EDH-EAT-00448	A	25
UPC 786676001779	alias	BRSF150	EDH-EAT-00449	A	26

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
UPC 786676001786	alias	3BRSF150	EDH-EAT-00451	A	24
UPC 786676375207	alias	BHT	EDH-EAT-00458	A	30
UPC 786676376228	alias	BRLW1	EDH-EAT-00460	A	31
UPC 786676460101	alias	BRL200	EDH-EAT-00453	A	23
UPC 786676461405	alias	BRS225	EDH-EAT-00450	A	25
UPC 786676461504	alias	3BRS225	EDH-EAT-00452	A	24
UPC 786676461603	alias	BRFP	EDH-EAT-00454	A	29
UPC 786679004203	alias	KPRL4W9X	EDH-EAT-00337	A	426
UPC 786679013014	alias	KPEKM4	EDH-EAT-00606	A	627
UPC 786679013021	alias	KPEK4	EDH-EAT-00605	A	626
UPC 786679022153	alias	4TA401K	EDH-EAT-00484	A	589
UPC 786679022542	alias	GTSK3	EDH-EAT-00628	A	558
UPC 786679027011	alias	3T100FB	EDH-EAT-00462	A	524
UPC 786679045299	alias	KPEKM3	EDH-EAT-00602	A	607
UPC 786679045312	alias	KPEK3	EDH-EAT-00601	A	605
UPC 786679064115	alias	3TA401KCW	EDH-EAT-00498	A	585
UPC 786679072943	alias	FCWTK	EDH-EAT-00617	A	548
UPC 786679094723	alias	3TA400K3K	EDH-EAT-00626	A	582
UPC 786679094730	alias	3TA400K6K	EDH-EAT-00627	A	583
UPC 786679096673	alias	3TA100G3K	EDH-EAT-00620	A	556
UPC 786679096680	alias	3TA100G6K	EDH-EAT-00621	A	557
UPC 786679106792	alias	3TA402K	EDH-EAT-00486	A	586
UPC 786679106808	alias	2TA402K	EDH-EAT-00485	A	579
UPC 786679106815	alias	4TA402K	EDH-EAT-00487	A	590
UPC 786679107713	alias	KPEKM34	EDH-EAT-00604	A	608
UPC 786679107720	alias	KPEK34	EDH-EAT-00603	A	606
UPC 786679108017	alias	EF3RTDK	EDH-EAT-00585	A	669
UPC 786679108031	alias	EF3RTWK	EDH-EAT-00582	A	670
UPC 786679108147	alias	EIPBK	EDH-EAT-00572	A	667
UPC 786679110201	alias	KPR1A	EDH-EAT-00609	A	544
UPC 786679114278	alias	IPB3	EDH-EAT-00648	A	566
UPC 786679117477	alias	EEC3K	EDH-EAT-00573	A	665
UPC 786679117484	alias	EEC4K	EDH-EAT-00574	A	665
UPC 786679118924	alias	3T225FD	EDH-EAT-00468	A	526
UPC 786679149416	alias	3TA400K	EDH-EAT-00475	A	582
UPC 786679149430	alias	3T400K	EDH-EAT-00480	A	580
UPC 786679161173	alias	B2016RD	EDH-EAT-00533	A	658
UPC 786679161456	alias	4212B77G01	EDH-EAT-00692	A	595
UPC 786679161487	alias	TAD3	EDH-EAT-00365	A	488
UPC 786679161517	alias	6642C14G04	EDH-EAT-00659	A	603
UPC 786679161524	alias	6642C14G05	EDH-EAT-00662	A	603
UPC 786679162446	alias	TA602LDCW	EDH-EAT-00509	A	619
UPC 786679162453	alias	T602LDCW	EDH-EAT-00513	A	616
UPC 786679162477	alias	3TA603LDKCW	EDH-EAT-00511	A	613
UPC 786679166987	alias	T1200NB3	EDH-EAT-00528	A	644
UPC 786679166994	alias	T1200NB3M	EDH-EAT-00529	A	700
UPC 786679200605	alias	KCWTK	EDH-EAT-00619	A	570
UPC 786679222409	alias	3TA225FD	EDH-EAT-00463	A	530
UPC 786679225424	alias	2TA401K	EDH-EAT-00482	A	578
UPC 786679225509	alias	IPB5	EDH-EAT-00650	A	651
UPC 786679225622	alias	B2016RDL	EDH-EAT-00534	A	658
UPC 786679251553	alias	4TA400K	EDH-EAT-00476	A	588

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
UPC 786679255100	alias	IPB4	EDH-EAT-00649	A	623
UPC 786679265703	alias	KPR3A	EDH-EAT-00611	A	599
UPC 786679265710	alias	KPR3AM	EDH-EAT-00613	A	599
UPC 786679265727	alias	KPR3B	EDH-EAT-00612	A	600
UPC 786679265734	alias	KPR3BM	EDH-EAT-00614	A	601
UPC 786679266113	alias	KPR1AM	EDH-EAT-00610	A	545
UPC 786679304822	alias	IPB1	EDH-EAT-00647	A	542
UPC 786679305072	alias	2600D26G01	EDH-EAT-00689	A	563
UPC 786679305287	alias	374D883G01	EDH-EAT-00654	A	546
UPC 786679410400	alias	2T400K	EDH-EAT-00479	A	575
UPC 786679410417	alias	2TA400K	EDH-EAT-00474	A	577
UPC 786679420430	alias	T600MA1	EDH-EAT-00517	A	629
UPC 786679420546	alias	T1600RD	EDH-EAT-00531	A	655
UPC 786679420553	alias	TA1600RD	EDH-EAT-00530	A	656
UPC 786679420683	alias	3TA100FD	EDH-EAT-00465	A	527
UPC 786679420812	alias	T700NB1	EDH-EAT-00526	A	645
UPC 786679421109	alias	T800MA1	EDH-EAT-00518	A	629
UPC 786679422458	alias	TA300K	EDH-EAT-00472	A	592
UPC 786679422465	alias	TA350K	EDH-EAT-00473	A	593
UPC 786679423530	alias	TA450LD	EDH-EAT-00503	A	617
UPC 786679424865	alias	TA700MA1	EDH-EAT-00514	A	630
UPC 786679424896	alias	TA700NB1	EDH-EAT-00522	A	648
UPC 786679487013	alias	623B222G01	EDH-EAT-00674	A	654
UPC 786679487136	alias	373B375G03	EDH-EAT-00678	A	653
UPC 786679487143	alias	373B375G04	EDH-EAT-00677	A	653
UPC 786679504321	alias	TS33LN	EDH-EAT-00639	A	598
UPC 786679508909	alias	314C960G07	EDH-EAT-00664	A	624
UPC 786679508916	alias	314C960G08	EDH-EAT-00665	A	624
UPC 786679508923	alias	314C960G09	EDH-EAT-00666	A	625
UPC 786679508947	alias	314C960G11	EDH-EAT-00672	A	641
UPC 786679509524	alias	314C960G10	EDH-EAT-00671	A	641
UPC 786679511909	alias	T350K	EDH-EAT-00478	A	592
UPC 786679511923	alias	T250KB	EDH-EAT-00471	A	560
UPC 786679511930; EAN; 4015081502813	alias	T300K	EDH-EAT-00477	A	591
UPC 786679511961	alias	TA250KB	EDH-EAT-00470	A	561
UPC 786679518922	alias	1253C73G05	EDH-EAT-00688	A	534
UPC 786679558966	alias	2TA401LDK	EDH-EAT-00500	A	609
UPC 786679558980	alias	3TA401LDK	EDH-EAT-00501	A	611
UPC 786679559123	alias	4TA603LDK	EDH-EAT-00507	A	614
UPC 786679559765	alias	PLN2M	EDH-EAT-00616	A	568
UPC 786679565001	alias	TA2000RD	EDH-EAT-00532	A	657
UPC 786679565056	alias	B2500RD	EDH-EAT-00535	A	659
UPC 786679572054	alias	TS33LD	EDH-EAT-00641	A	597
UPC 786679612224	alias	T1000NB1	EDH-EAT-00527	A	643
UPC 786679612286	alias	TA1000NB1	EDH-EAT-00523	A	645
UPC 786679612316	alias	TA1200NB1	EDH-EAT-00524	A	646
UPC 786679612347	alias	TA1201NB1	EDH-EAT-00525	A	647
UPC 786679651520	alias	FDPWT3611R	EDH-EAT-01202	A	503
UPC 786679651544	alias	FDPWT3622R	EDH-EAT-01204	A	504
UPC 786679651568	alias	FDPWT3233R	EDH-EAT-01205	A	502
UPC 786679651612	alias	FDPWT3222R	EDH-EAT-01203	A	501

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
UPC 786679651667	alias	FDPWT3633R	EDH-EAT-01206	A	505
UPC 786679679272	alias	TA800MA2	EDH-EAT-00515	A	631
UPC 786679679289	alias	TA801MA	EDH-EAT-00516	A	632
UPC 786679730706	alias	6642C14G02	EDH-EAT-00658	A	602
UPC 786679761304	alias	PLN2	EDH-EAT-00615	A	567
UPC 786679770917	alias	451D874G01	EDH-EAT-00652	A	547
UPC 786679770924	alias	451D874G02	EDH-EAT-00653	A	548
UPC 786679783115	alias	FDPW367	EDH-EAT-01216	A	498
UPC 786679783917	alias	FDPW326R	EDH-EAT-01213	A	495
UPC 786679783924	alias	FDPW366R	EDH-EAT-01214	A	497
UPC 786679801871	alias	2TA603LDK	EDH-EAT-00505	A	610
UPC 786679801888	alias	3TA603LDK	EDH-EAT-00506	A	612
UPC 786679803462	alias	TEC2	EDH-EAT-00646	A	543
UPC 786679825389	alias	1253C73G01	EDH-EAT-00687	A	533
UPC 786679825440	alias	1253C73G06	EDH-EAT-00686	A	535
UPC 786679831120	alias	208B264H01	EDH-EAT-00703	A	596
UPC 786679831144	alias	208B297H01	EDH-EAT-00704	A	622
UPC 786679831205	alias	2600D26G02	EDH-EAT-00690	A	563
UPC 786679836064	alias	4212B78G02	EDH-EAT-00691	A	596
UPC 786679836088	alias	314C996G01	EDH-EAT-00695	A	635
UPC 786679836101	alias	314C996G02	EDH-EAT-00696	A	636
UPC 786679836125	alias	314C996G03	EDH-EAT-00697	A	637
UPC 786679836149	alias	315C270H01	EDH-EAT-00705	A	638
UPC 786679836323	alias	374D883G02	EDH-EAT-00655	A	546
UPC 786679838662	alias	505C606G04	EDH-EAT-00698	A	649
UPC 786679838686	alias	505C606G05	EDH-EAT-00699	A	650
UPC 786679838709	alias	505C606G06	EDH-EAT-00700	A	651
UPC 786679838761	alias	506C052G01	EDH-EAT-00694	A	620
UPC 786679840504	alias	3T150FB	EDH-EAT-00466	A	525
UPC 786679840528	alias	624B600H01	EDH-EAT-00702	A	538
UPC 786679840542	alias	624B600H02	EDH-EAT-00701	A	539
UPC 786679841365	alias	673B142G02	EDH-EAT-00679	A	535
UPC 786679841488	alias	673B142G10	EDH-EAT-00680	A	536
UPC 786679843802	alias	3TA150F3K	EDH-EAT-00622	A	528
UPC 786679843826	alias	3TA150F6K	EDH-EAT-00623	A	528
UPC 786679843840	alias	3TA250J3K	EDH-EAT-00624	A	559
UPC 786679843864	alias	3TA250J6K	EDH-EAT-00625	A	560
UPC 786679844250	alias	3TA225FDK	EDH-EAT-00467	A	531
UPC 786679852057	alias	T602LD	EDH-EAT-00508	A	615
UPC 786679852064	alias	TA602LD	EDH-EAT-00504	A	618
UPC 786679884010	alias	3TA401K	EDH-EAT-00483	A	584
UPC 786679913253	alias	FDPW325R	EDH-EAT-01211	A	494
UPC 786679913659	alias	FDPW365R	EDH-EAT-01212	A	496
UPC 786679913949	alias	FDPW368	EDH-EAT-01218	A	499
UPC 786679914205	alias	FDPWT3211R	EDH-EAT-01201	A	500
UPC 786679970560	alias	3T20FB	EDH-EAT-00461	A	526
UPC 786679970584	alias	3TA150FB	EDH-EAT-00469	A	530
UPC 786679970591	alias	3TA50FB	EDH-EAT-00464	A	532
UPC 786679971116	alias	314C420G05	EDH-EAT-00642	A	622
UPC 786679971123	alias	208B966G01	EDH-EAT-00643	A	639
UPC 786679973189	alias	624B609G01	EDH-EAT-00693	A	621
UPC 786685100852	alias	NTS3K	EDH-EAT-00644	A	652

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
UPC 786685211022	alias	RAABR12L125	EDH-EAT-00762	A	39
UPC 786685211046	alias	RAABR12L125A	EDH-EAT-00763	A	40
UPC 786685211060	alias	RACH24L125I	EDH-EAT-01232	A	32
UPC 786685211114	alias	RDCH42B200I	EDH-EAT-01233	A	33
UPC 786685211169	alias	RDCHFRAME	EDH-EAT-01234	A	36
UPC 786685220000	alias	EF2RTWK	EDH-EAT-00581	A	669
UPC 786685220024	alias	EF2RTDK	EDH-EAT-00584	A	668
UPC 786685242545	alias	RABR20L125	EDH-EAT-00744	A	43
UPC 786685291918	alias	RTBR12L125R	EDH-EAT-01235	A	35
UPC 786685291925	alias	RTBR10B100Q	EDH-EAT-01236	A	34
UPC 786685316765	alias	SPD050208Y2A	EDH-EAT-01225	A	292
UPC 786685317366	alias	SPD100208Y2A	EDH-EAT-01226	A	293
UPC 786685317397	alias	SPD100480Y2A	EDH-EAT-01224	A	293
UPC 786685318097	alias	SPD160480Y3A	EDH-EAT-01222	A	295
UPC 786685318394	alias	SPD200480Y3A	EDH-EAT-01223	A	295
UPC 786685322193	alias	SPD120480Y2C	EDH-EAT-01227	A	294
UPC 786685355412	alias	EZT2090S	EDH-EAT-01048	A	264
UPC 786685355429	alias	EZT2090F	EDH-EAT-01049	A	263
UPC 786685357867	alias	5155C81G01	EDH-EAT-00403	A	253
UPC 786685399256	alias	EZT2042S	EDH-EAT-01018	A	259
UPC 786685400044	alias	EZT2042F	EDH-EAT-01019	A	258
UPC 786685406596	alias	SPD050230L2A	EDH-EAT-01220	A	292
UPC 786685406695	alias	SPD120230L3A	EDH-EAT-01221	A	294
UPC 786685466910	alias	T250FJ	EDH-EAT-00541	A	674
UPC 786689014650	alias	PRLSEBLGKD	EDH-EAT-00213	A	245
UPC 786689014674	alias	PRLSEBFD	EDH-EAT-00215	A	243
UPC 786689014681	alias	PRLSEBGHB	EDH-EAT-00216	A	243
UPC 786689040796	alias	KPRL3AED3	EDH-EAT-00208	A	332
UPC 786689056261	alias	PDSPD2403SA2A-K3	EDH-EAT-01230	A	372
UPC 786689056292	alias	PDSPD4803SA2A-K3	EDH-EAT-01228	A	372
UPC 786689056346	alias	PDSPD4803SA2A-K4	EDH-EAT-01229	A	490
UPC 786689056391	alias	PDSPD2403SA2A-K4	EDH-EAT-01231	A	490
UPC 786689242091	alias	PRLSEBPD2	EDH-EAT-00218	A	315
UPC 786689242107	alias	PRLSEBPD3	EDH-EAT-00217	A	316
UPC 786689242114	alias	PRLSEBPD4	EDH-EAT-00790	A	317
UPC 786689242121	alias	PRLSEBPD5	EDH-EAT-00789	A	318
UPC 786689242572	alias	KPRL4X22	EDH-EAT-00300	A	460
UPC 786689242589	alias	KPRL4X32	EDH-EAT-00301	A	461
UPC 786689242596	alias	KPRL4X334S	EDH-EAT-00302	A	462
UPC 786689242602	alias	KPRL4X334T	EDH-EAT-00303	A	462
UPC 786689242619	alias	KPRL4X336	EDH-EAT-00304	A	463
UPC 786689242626	alias	KPRL4X34	EDH-EAT-00305	A	464
UPC 786689242633	alias	KPRL4X35	EDH-EAT-00306	A	465
UPC 786689242640	alias	KPRL3X23	EDH-EAT-00200	A	343
UPC 786689242657	alias	KPRL3X23T	EDH-EAT-00202	A	344
UPC 786689242664	alias	KPRL3X22	EDH-EAT-00201	A	341
UPC 786689242671	alias	KPRL3X22T	EDH-EAT-00203	A	342
UPC 786689346935	alias	KPRL3XBA06	EDH-EAT-00168	A	345
UPC 786689346942	alias	KPRL3XBA12	EDH-EAT-00170	A	347
UPC 786689346959	alias	KPRL3XBA06-1	EDH-EAT-00169	A	346
UPC 786689346966	alias	KPRL3XBA12-1	EDH-EAT-00171	A	348
UPC 786689346973	alias	KPRL3XBA18	EDH-EAT-00172	A	349

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
UPC 786689346980	alias	KPRL3XBA18-1	EDH-EAT-00173	A	350
UPC 786689346997	alias	KPRL3XBA24	EDH-EAT-00174	A	351
UPC 786689347000	alias	KPRL3XGB06-1	EDH-EAT-00177	A	354
UPC 786689347017	alias	KPRL3XGB12	EDH-EAT-00178	A	355
UPC 786689347024	alias	KPRL3XGB12-1	EDH-EAT-00179	A	356
UPC 786689347031	alias	KPRL3XBA24-1	EDH-EAT-00175	A	352
UPC 786689347048	alias	KPRL3XGB06	EDH-EAT-00176	A	353
UPC 786689347062	alias	KPRL3XGB18	EDH-EAT-00180	A	357
UPC 786689347079	alias	KPRL3XGB18-1	EDH-EAT-00181	A	358
UPC 786689347086	alias	KPRL3XGB24	EDH-EAT-00182	A	359
UPC 786689347093	alias	KPRL3XGB24-1	EDH-EAT-00183	A	360
UPC 786689497651	alias	5155C81G03	EDH-EAT-00409	A	253
UPC 786689527952	alias	5155C81G05	EDH-EAT-01177	A	254
UPC 786689527969	alias	5155C81G06	EDH-EAT-01178	A	255
UPC 786689527976	alias	5155C81G04	EDH-EAT-01176	A	254
UPC 786689814915	alias	PRXP4PD2FILL1	EDH-EAT-00297	A	506
UPC 786689832193	alias	EZTV2036S	EDH-EAT-01014	A	266
UPC 786689832209	alias	EZTV2036F	EDH-EAT-01015	A	266
UPC 786689832216	alias	EZTV2042S	EDH-EAT-01020	A	267
UPC 786689832223	alias	EZTV2042F	EDH-EAT-01021	A	267
UPC 786689832230	alias	EZTV2048S	EDH-EAT-01026	A	268
UPC 786689832247	alias	EZTV2048F	EDH-EAT-01027	A	268
UPC 786689832254	alias	EZTV2060S	EDH-EAT-01038	A	270
UPC 786689832261	alias	EZTV2060F	EDH-EAT-01039	A	270
UPC 786689832278	alias	EZTV2072S	EDH-EAT-01044	A	271
UPC 786689832285	alias	EZTV2072F	EDH-EAT-01045	A	271
UPC 786689832292	alias	EZTV2090S	EDH-EAT-01050	A	272
UPC 786689832308	alias	EZTV2090F	EDH-EAT-01051	A	272
UPC 887621572570	alias	BK1A	EDH-SIE-00096	A	1682
VB657C	alias	VB657	EDH-SIE-00462	A	1736
VCEL021-14S1	alias	VCEL02114S1	EDH-SQD-00294	A	928
VCEL030-516H1	alias	VCEL030516H1	EDH-SQD-00291	A	928
VCEL050-12H1	alias	VCEL05012H1	EDH-SQD-00292	A	928
VCEL060-12H1	alias	VCEL06012H1	EDH-SQD-00299	A	929
VCEL075-12H1	alias	VCEL07512H1	EDH-SQD-00293	A	929
VCELC021-14S1	alias	VCELC02114S1	EDH-SQD-00295	A	929
VCELC030-38H1	alias	VCELC03038H1	EDH-SQD-00296	A	929
VCELC050-12H1	alias	VCELC05012H1	EDH-SQD-00297	A	930
VCELC075-12H1	alias	VCELC07512H1	EDH-SQD-00298	A	930
Westinghouse DA breaker	supersedes	KCDPDK	EDH-EAT-00361	A	96
Westinghouse EB, EHB breaker	supersedes	KCDPEHD	EDH-EAT-00353	A	97
Westinghouse FB breaker	supersedes	KCDPFDB	EDH-EAT-00354	A	99
Westinghouse HFB breaker	supersedes	KCDPFD	EDH-EAT-00355	A	98
Westinghouse HKA breaker	supersedes	KCDPHKD	EDH-EAT-00357	A	100
Westinghouse JA breaker	supersedes	KCDPKDB	EDH-EAT-00359	A	103
Westinghouse JB breaker	supersedes	KCDPJDB	EDH-EAT-00360	A	102
Westinghouse KA breaker	supersedes	KCDPKD	EDH-EAT-00356	A	102
Westinghouse KB, HKB breaker	supersedes	KCDPJD	EDH-EAT-00358	A	101
Westinghouse LA, HLA breaker	supersedes	KCDPLD	EDH-EAT-00362	A	104
Westinghouse MA, HMA breaker	supersedes	KCDPMDL	EDH-EAT-00363	A	105
Westinghouse NB, HNB breaker	supersedes	KCDPND	EDH-EAT-00364	A	106
WFP1	alias	BFP1WE	EDH-OTH-00141	D	93

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
WFP2	alias	BFP2WE	EDH-OTH-00142	D	93
WFP3	alias	BFP3WE	EDH-OTH-00143	D	93

11.2 Replacement and successor statements

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-EAT-00901	EELD36600SB2	Eaton chart: EE LS / LS(A) / LS(E) / LS(B) -> PRL5P LD	A
EDH-EAT-00343	KCDPCA	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00341	KCDPED225	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00340	KCDPFB100	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00342	KCDPFBP	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00344	KCDPKB	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00346	KCDPLA400	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00347	KCDPLA600	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00345	KCDPLB	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00348	KCDPLCL	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00349	KCDPMC	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00351	KCDPNBP	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00350	KCDPNC	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00329	KPRL4ED	KPRL4X32 covers the same frames in the April 2021 table	D
EDH-EAT-00327	KPRL4ED2	KPRL4X22 covers the same frames in the April 2021 table	D
EDH-EAT-00328	KPRL4FD	KPRL4X32 covers the same frames in the April 2021 table	D
EDH-EAT-00325	KPRL4FD1	KPRL4X12 covers the same frames in the April 2021 table	D
EDH-EAT-00326	KPRL4FD2	KPRL4X22 covers the same frames in the April 2021 table	D
EDH-EAT-00330	KPRL4LD	KPRL4LC covers the same frames in the April 2021 table	D
EDH-EAT-00897	MP403XBLANK	OEM catalog format for a 3X MP40 filler cover is MP40FC-3X (MP40FC-_X, any 1X = 1.38 in increment, includes cover, brackets and hardware). "MP403XBLANK" does not appear in RP01400003E and is likely a dealer description.	A
EDH-EAT-00896	MP40CHH	OEM CHH connector kits in RP01400003E Table 22 are MP40KCHH225-2 (2-pole, 2X) and MP40KCHH225-3 (3-pole, 3X), twin, 225 A max.	A
EDH-EAT-00889	MP40ED225-3	Not listed in RP01400003E Table 22. The OEM 225 A 3-pole twin connector kit for FDB, FD, HFD, FDC, ED, EHD, EDC is MP40KF225-3 (2-pole: MP40KF225-2).	A
EDH-EAT-00892	MP40KL400-3	Not listed in RP01400003E Table 22. OEM L-frame kits are MP40KL600-3 (LD/HLD/LDC, twin, 600 A, 6X) and MP40KLL400-3 (LCL 400 A, single, 6X).	A
EDH-GEA-00163	AMC3GMFP	empower (ABB) lists AMC3GMFP as "REPLACED BY AMC3GM + AFP4SGS"	A
EDH-GEA-00146	AMC6EYFP	empower (ABB) lists AMC6EYFP as "REPLACED BY AMC6EY + AFP3EYD"	A
EDH-GEA-00152	AMC6FJFP	empower (ABB) lists AMC6FJFP as "CONSISTS OF AMC6FJ + AFP3SFD"	A
EDH-GEA-00121	AMCB3FJFP	ABB Tmax XT retrofit kit SRFB3XT4FPX (or SRFB3XT4FPK with Kirk lock provision) for Tmax XT4, 250 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served	A
EDH-GEA-00124	AMCB3GMFP	ABB Tmax XT retrofit kit SRFB3XT5MFPX (or SRFB3XT5MFPK with Kirk lock provision) for Tmax XT5, 600 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served	A
EDH-GEA-00127	AMCB3KMFP	ABB Tmax XT retrofit kit SRFB3XT7MFPX (or SRFB3XT7MFPK with Kirk lock provision) for Tmax XT7, 1200 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served	A
EDH-GEA-00104	AMCB6EBFP	empower (ABB) lists AMCB6EBFP as "REPLCE BY AMCB6EB + AFP3SED"	A

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-GEA-00104	AMCB6EBFP	ABB Tmax XT retrofit kit SRFB6XT1FPX (or SRFB6XT1FPK with Kirk lock provision) for Tmax XT1, 125 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served	A
EDH-GEA-00106	AMCB6FBFP	empower (ABB) lists AMCB6FBFP as "REPLACED BY AMCB6FB + AFP3FBD"	A
EDH-GEA-00110	AMCB6FJFP	empower (ABB) lists AMCB6FJFP as "REPLACED BY AMCB6FJ + AFP3SFD"	A
EDH-GEA-00110	AMCB6FJFP	ABB Tmax XT retrofit kit SRFB6XT4FPX (or SRFB6XT4FPK with Kirk lock provision) for Tmax XT4, 250 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served	A
EDH-GEA-00116	AMCB6GBFP	empower (ABB) lists AMCB6GBFP as "REPLCE BY AMCB6GB + AFP4SGD"	A
EDH-GEA-00116	AMCB6GBFP	ABB Tmax XT retrofit kit SRFB6XT5BFPX (or SRFB6XT5BFPK with Kirk lock provision) for Tmax XT5, 600 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served	A
EDH-GEA-00551	SRFB3XT4FPX	ABB eCatalog cross reference pairs SRFB3XT4FPX with e.g. XT4SQ3100EFF000XXX (Ekip LS/I, 35 kA) replacing Spectra SEL 100 A frame (rating plug SRPE100A80), and XT4LU3225GFF000XXX replacing Spectra SGH 225 A	B
EDH-GEA-00549	SRFB6XT4FPX	ABB eCatalog 'Spectra to Tmax XT Smart Cross Reference' pairs SRFB6XT4FPX with Tmax XT4 TMF breakers, e.g. XT4VU3100BFF000XXX (250 A frame, 65 kA), XT4VU3025AFF000XXX, XT4VU3050AFF000XXX	B
EDH-OTH-00048	BAMCB35KMGE	Seller states it replaces OEM AMCB3KMFP ('Kit SKS1K; Replaces OEM AMCB35KMFP (sic; OEM catalog number is AMCB3KMFP)')	C
EDH-OTH-00046	BAMCB3FJGE	Seller states it replaces OEM AMCB3FJFP ('Kit SFS1K; Replaces OEM AMCB3FJFP')	C
EDH-OTH-00047	BAMCB3GMGE	Seller states it replaces OEM AMCB3GMFP ('Kit SGS1K; Replaces OEM AMCB3GMFP')	C
EDH-OTH-00049	BAMCB6EBGE	Seller states it replaces OEM AMCB6EBFP ('Kit SED1K; Replaces OEM AMCB6EBFP')	C
EDH-OTH-00050	BAMCB6EYGE	Seller states it replaces OEM AMCB6EYFP ('Kit SEY1K; Replaces OEM AMCB6EYFP')	C
EDH-OTH-00052	BAMCB6FJGE	Seller states it replaces OEM AMCB6FJFP ('Kit SFD1K; Replaces OEM AMCB6FJFP')	C
EDH-OTH-00053	BAMCB6GBGE	Seller states it replaces OEM AMCB6GBFP ('Kit SGD1K; Replaces OEM AMCB6GBFP')	C
EDH-OTH-00051	BAMCB6QDGE	Seller states it replaces OEM AMCB6QDFP ('Kit SQD1K; Replaces OEM AMCB6QDFP')	C
EDH-OTH-00006	BBDPNEF10FPE	Seller states it replaces OEM KBDP1C ('Kit # NEF3K replaces OEM KBDP1C')	C
EDH-OTH-00007	BBDPNEJFPE	Seller states it replaces OEM KBDP2C ('Kit # NEJ3K replaces OEM KBDP2C')	C
EDH-OTH-00008	BBDPNJLFPE	Seller states it replaces OEM KBDP4C ('Kit # NJL3K replaces OEM KBDP4C')	C
EDH-OTH-00029	BCDPCACH	Seller states it replaces OEM KCDPCA ('Kit CA1K replaces OEM KCDPCA')	C
EDH-OTH-00028	BCDPFBCH	Seller states it replaces OEM KCDPFB150 ('Kit FB1K replaces OEM KCDPFB150')	C
EDH-OTH-00030	BCDPKBCH	Seller states it replaces OEM KCDPKB ('Kit KB1K replaces OEM KCDPKB')	C
EDH-OTH-00032	BCDPLACH	Seller states it replaces OEM KCDPLA400 ('Kit LA4K replaces OEM KCDPLA400')	C
EDH-OTH-00031	BCDPLBCH	Seller states it replaces OEM KCDPLB ('Kit LB1K replaces OEM KCDPLB')	C
EDH-OTH-00033	BCDPLCCH	Seller states it replaces OEM KCDPLA600 ('Kit LA6K replaces OEM KCDPLA600')	C
EDH-OTH-00034	BCDPMACH	Seller states it replaces OEM KCDPMA ('Kit MA8K replaces OEM KCDPMA')	C
EDH-OTH-00035	BCDPNBCH	Seller states it replaces OEM KCDPNB ('Kit NB12K replaces OEM KCDPNB')	C
EDH-OTH-00002	BCDPNEF10FPE	Seller states it replaces OEM KCDP1C ('Kit # NEF1K replaces OEM KCDP1C')	C
EDH-OTH-00003	BCDPNEJFPE	Seller states it replaces OEM KCDP2C ('Kit # NEJ1K replaces OEM KCDP2C')	C
EDH-OTH-00004	BCDPNFJFPE	Seller states it replaces OEM KCDP3C ('Kit # NFJ1K replaces OEM KCDP3C')	C
EDH-OTH-00005	BCDPNJLFPE	Seller states it replaces OEM KCDP4C ('Kit # NJL1K replaces OEM KCDP4C')	C
EDH-OTH-00054	BEDITE	Seller states it replaces OEM 6E62 ('Kit # ED65K replaces OEM 6E62 and SE6D')	C
EDH-OTH-00061	BEDSITE	Seller states it replaces OEM SE6 ('Replaces OEM SE6')	C
EDH-OTH-00056	BFDITE	Seller states it replaces OEM 6F62 ('Kit # FD65K replaces OEM 6F62 and SF6D')	C
EDH-OTH-00063	BFDSITE	Seller states it replaces OEM SF6 ('Replaces OEM SF6')	C
EDH-OTH-00067	BFJITE	Seller states it replaces OEM 5FJ2 ('Kit # FJ3K. Replaces OEM 5FJ2')	C
EDH-OTH-00058	BJDITE	Seller states it replaces OEM 6JJ62 ('Kit # JD65K replaces OEM 6JJ62 and SJ2D')	C
EDH-OTH-00057	BJDSGLITE	Seller states it replaces OEM 6JJ61 ('Kit # JDS65K replaces OEM 6JJ61 and SJ1D')	C
EDH-OTH-00064	BJDSITE	Seller states it replaces OEM SJ1 ('Replaces OEM SJ1')	C

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-OTH-00066	BJLITE	Seller states it replaces OEM 5JJ2 ('Kit # JJ3K. Replaces OEM 5JJ2')	C
EDH-OTH-00059	BLDITE	Seller states it replaces OEM 6LL61 ('Kit # LD65K replaces OEM 6LL61 and SL6D')	C
EDH-OTH-00060	BMDITE	Seller states it replaces OEM SMND ('Replaces OEM SMND')	C
EDH-OTH-00144	BNEHBSD	No OEM cross-reference given. Note: Schneider FAQ FA129258 states bus bars in an obsolete NEHB panelboard are not field replaceable items (applies to bus bars, not necessarily breaker links).	C
EDH-OTH-00036	BNHB150GE	Seller states it replaces OEM NHB150PK ('OEM Item NHB150PK Is Provided as PCS Brand ... (truncated)')	C
EDH-OTH-00027	BPHCCH	Seller states it replaces OEM PH6C3 ('Kit # PH6CK Replaces OEM PH6C3')	C
EDH-OTH-00026	BPHECH	Seller states it replaces OEM PH6E3 ('Kit # PH6EK replaces OEM PH6E3')	C
EDH-OTH-00010	BPRL3AEDCH	Seller states it replaces OEM KPRL3AED3 ('Kit # ED3K replaces OEM KPRL3AED3')	C
EDH-OTH-00009	BPRL3AFDCH	Seller states it replaces OEM KPRL3AFD3 ('Kit # FD3K replaces OEM KPRL3AFD3')	C
EDH-OTH-00022	BPRL4BEDCH	Seller states it replaces OEM KPRL4ED ('Kit #ED4BK replaces OEM KPRL4ED')	C
EDH-OTH-00021	BPRL4BFDCH	Seller states it replaces OEM KPRL4FD ('Kit # FD4BK replaces OEM KPRL4FD')	C
EDH-OTH-00023	BPRL4BJDSCH	Seller states it replaces OEM KPRL4JDS ('Kit # JDS4BK replaces OEM KRPL4JDS (sic; read as KPRL4JDS)')	C
EDH-OTH-00024	BPRL4BKDSCH	Seller states it replaces OEM KPRL4KDS ('Kit # KDS4BK replaces OEM KPRL4KDS')	C
EDH-OTH-00025	BPRL4BLDSCH	Seller states it replaces OEM KPRL4LDS ('Kit # LDS4BK replaces OEM KPRL4LDS')	C
EDH-OTH-00013	BPRLCACH	Seller states it replaces OEM KPRL4CA ('Kit # CA4K replaces OEM KPRL4CA')	C
EDH-OTH-00012	BPRLEDCH	Seller states it replaces OEM KPRL4ED ('Kit # ED4K replaces OEM KPRL4ED')	C
EDH-OTH-00011	BPRLFDCH	Seller states it replaces OEM KPRL4FD ('OEM Item KPRL4FD Is ... (truncated on listing)')	C
EDH-OTH-00015	BPRLJDSCH	Seller states it replaces OEM KPRL4JDS ('Kit # JDS4K replaces OEM KPRL4JDS')	C
EDH-OTH-00014	BPRLJDTCH	Seller states it replaces OEM KPRL4JDT ('Kit # JD4K replaces OEM KPRL4JDT')	C
EDH-OTH-00017	BPRLKDSCH	Seller states it replaces OEM KPRL4KDS ('Kit # KDS4K replaces OEM KPRL4KDS')	C
EDH-OTH-00016	BPRLKDTCH	Seller states it replaces OEM KPRL4KDT ('OEM Item KPRL4KDT Is Provided as PCS Brand Aftermarket Kit')	C
EDH-OTH-00018	BPRLLDCH	Seller states it replaces OEM KPRL4LD ('Kit # LA4K replaces OEM KPRL4LD')	C
EDH-OTH-00019	BPRLMDCH	Seller states it replaces OEM KPRL4MD ('Kit # MD4K replaces OEM KPRL4MD')	C
EDH-OTH-00020	BPRLNDCH	Seller states it replaces OEM KPRL4ND ('Kit # ND4K replaces OEM KPRL4ND')	C
EDH-OTH-00055	BQJITE	Seller states it replaces OEM 6QJ2 ('Kit # QJ65K replaces OEM 6QJ2 and SQJD')	C
EDH-OTH-00062	BQJSITE	Seller states it replaces OEM SQJ ('Replaces OEM SQJ')	C
EDH-OTH-00065	BSEBP4	Seller states it replaces OEM SEB ('Replaces OEM SEB')	C
EDH-OTH-00043	BSGDGE	Seller states it replaces OEM SG6DPK ('Kit SGD6K; Replaces OEM SG6DPK')	C
EDH-OTH-00068	BSK4515	Seller states it replaces OEM SK4515 ('Equal To - OEM # SK4515')	C
EDH-OTH-00069	BSK4516	Seller states it replaces OEM SK4516 ('Equal To - OEM # SK4516')	C
EDH-OTH-00070	BSK4517	Seller states it replaces OEM SK4517 ('Equal To - OEM # SK4517')	C
EDH-OTH-00071	BSK4578	Seller states it replaces OEM SK4578 ('Equal To - OEM # SK4578')	C
EDH-OTH-00037	BTEDGE	Seller states it replaces OEM TED1DPK ('Kit # TED1K replaces OEM TED1DPK')	C
EDH-OTH-00038	BTELGE	Seller states it replaces OEM TEL1DPK ('Kit # TEL1K replaces OEM TEL1DPK')	C
EDH-OTH-00040	BTFKGE	Seller states it replaces OEM TF2DPK ('Kit # TFK1K replaces OEM TF2DPK')	C
EDH-OTH-00041	BTJK4GE	Seller states it replaces OEM TJ4DPK ('Kit # TJK4K replaces OEM TJ4DPK')	C
EDH-OTH-00042	BTJK6GE	Seller states it replaces OEM TJ6DPK ('Kit # TJK6K replaces OEM TJ6DPK')	C
EDH-OTH-00045	BTK12GE	Seller states it replaces OEM TK12SPK ('Kit TKM12K; Replaces OEM TK12SPK')	C
EDH-OTH-00044	BTK8GE	Seller states it replaces OEM TK8SPK ('Kit TKM8K; Replaces OEM TK8SPK')	C
EDH-OTH-00039	BTQDGE	Seller states it replaces OEM TQ2DPK ('Kit # TQD1K replaces OEM TQ2DPK')	C
EDH-OTH-00072	UBIF015N	Corresponds to: FPE NC One Pole Thin Series (seller table)	C
EDH-OTH-00073	UBIF020N	Corresponds to: FPE NC One Pole Thin Series (seller table)	C
EDH-OTH-00077	UBIF0215N	Corresponds to: FPE NC Two Pole Thin Series (seller table)	C
EDH-OTH-00078	UBIF0220N	Corresponds to: FPE NC Two Pole Thin Series (seller table)	C
EDH-OTH-00079	UBIF0230N	Corresponds to: FPE NC Two Pole Thin Series (seller table)	C
EDH-OTH-00080	UBIF0240N	Corresponds to: FPE NC Two Pole Thin Series (seller table)	C
EDH-OTH-00081	UBIF0250N	Corresponds to: FPE NC Two Pole Thin Series (seller table)	C
EDH-OTH-00074	UBIF030N	Corresponds to: FPE NC One Pole Thin Series (seller table)	C

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-OTH-00075	UBIF040N	Corresponds to: FPE NC One Pole Thin Series (seller table)	C
EDH-OTH-00076	UBIF050N	Corresponds to: FPE NC One Pole Thin Series (seller table)	C
EDH-OTH-00082	UBIF15N	Corresponds to: FPE NA One Pole Thick Series (seller table)	C
EDH-OTH-00083	UBIF20N	Corresponds to: FPE NA One Pole Thick Series (seller table)	C
EDH-OTH-00087	UBIF215N	Corresponds to: FPE NA Two Pole Thick Series (seller table)	C
EDH-OTH-00088	UBIF220N	Corresponds to: FPE NA Two Pole Thick Series (seller table)	C
EDH-OTH-00089	UBIF230N	Corresponds to: FPE NA Two Pole Thick Series (seller table)	C
EDH-OTH-00090	UBIF240N	Corresponds to: FPE NA Two Pole Thick Series (seller table)	C
EDH-OTH-00091	UBIF250N	Corresponds to: FPE NA Two Pole Thick Series (seller table)	C
EDH-OTH-00092	UBIF260N	Corresponds to: FPE NA Two Pole Thick Series (seller table)	C
EDH-OTH-00093	UBIF270N	Corresponds to: FPE NA Two Pole Thick Series (seller table)	C
EDH-OTH-00084	UBIF30N	Corresponds to: FPE NA One Pole Thick Series (seller table)	C
EDH-OTH-00130	UBIF340N	Superbreakers: FPE NA3P40 (40 A 3-pole Stab-Lok) 'crosses over with the UBIF340N'	D
EDH-OTH-00131	UBIF380NB	Superbreakers: FPE NB231080 (80 A 3-pole bolt-on, NBLP/NBC/NBDP/CDP) 'is replaced by the UBIF380NB'	D
EDH-OTH-00085	UBIF40N	Corresponds to: FPE NA One Pole Thick Series (seller table)	C
EDH-OTH-00086	UBIF50N	Corresponds to: FPE NA One Pole Thick Series (seller table)	C
EDH-OTH-00132	UBIFPE1003	Superbreakers: FPE NE234100 (100 A 3-pole NE) 'serves as a seamless substitute for the UBIFPE1003'	D
EDH-OTH-00094	UBIP115	Corresponds to: Pushmatic One Pole Series (seller table)	C
EDH-OTH-00095	UBIP120	Corresponds to: Pushmatic One Pole Series (seller table)	C
EDH-OTH-00096	UBIP130	Corresponds to: Pushmatic One Pole Series (seller table)	C
EDH-OTH-00105	UBIP1515	Corresponds to: Pushmatic Twin Pole Series (seller table)	C
EDH-OTH-00106	UBIP1520	Corresponds to: Pushmatic Twin Pole Series (seller table)	C
EDH-OTH-00107	UBIP2020	Corresponds to: Pushmatic Twin Pole Series (seller table)	C
EDH-OTH-00104	UBIP2100	Corresponds to: Pushmatic Two Pole Series (seller table)	C
EDH-OTH-00097	UBIP215	Corresponds to: Pushmatic Two Pole Series (seller table)	C
EDH-OTH-00098	UBIP220	Corresponds to: Pushmatic Two Pole Series (seller table)	C
EDH-OTH-00099	UBIP230	Corresponds to: Pushmatic Two Pole Series (seller table)	C
EDH-OTH-00100	UBIP240	Corresponds to: Pushmatic Two Pole Series (seller table)	C
EDH-OTH-00101	UBIP250	Corresponds to: Pushmatic Two Pole Series (seller table)	C
EDH-OTH-00102	UBIP260	Corresponds to: Pushmatic Two Pole Series (seller table)	C
EDH-OTH-00103	UBIP270	Corresponds to: Pushmatic Two Pole Series (seller table)	C
EDH-OTH-00125	UBIZ0220	Corresponds to: Zinsco RC Series - RC3820 (seller table)	C
EDH-OTH-00126	UBIZ0230	Corresponds to: Zinsco RC Series - RC3830 (seller table)	C
EDH-OTH-00127	UBIZ0240	Corresponds to: Zinsco RC Series - RC3840 (seller table)	C
EDH-OTH-00128	UBIZ0250	Corresponds to: Zinsco RC Series - RC3850 (seller table)	C
EDH-OTH-00129	UBIZ0260	Corresponds to: Zinsco RC Series - RC3860 (seller table)	C
EDH-OTH-00108	UBIZ15	Corresponds to: Zinsco Q Series - Q15 (seller table)	C
EDH-OTH-00121	UBIZ1515	Corresponds to: Zinsco R Series - R3815 (seller table)	C
EDH-OTH-00122	UBIZ1520	Corresponds to: Zinsco R Series - R381520 (seller table)	C
EDH-OTH-00109	UBIZ20	Corresponds to: Zinsco Q Series - Q20 (seller table)	C
EDH-OTH-00123	UBIZ2020	Corresponds to: Zinsco R Series - R3820 (seller table)	C
EDH-OTH-00119	UBIZ2100	Corresponds to: Zinsco QC Series - QCAL100 (seller table)	C
EDH-OTH-00120	UBIZ2125	Corresponds to: Zinsco QC Series - QCAL125 (seller table)	C
EDH-OTH-00111	UBIZ220	Corresponds to: Zinsco QC Series - QC20 (seller table)	C
EDH-OTH-00112	UBIZ230	Corresponds to: Zinsco QC Series - QC30 (seller table)	C
EDH-OTH-00113	UBIZ240	Corresponds to: Zinsco QC Series - QC40 (seller table)	C
EDH-OTH-00114	UBIZ250	Corresponds to: Zinsco QC Series - QC50 (seller table)	C
EDH-OTH-00115	UBIZ260	Corresponds to: Zinsco QC Series - QCAL60 (seller table)	C
EDH-OTH-00116	UBIZ270	Corresponds to: Zinsco QC Series - QCAL70 (seller table)	C
EDH-OTH-00117	UBIZ280	Corresponds to: Zinsco QC Series - QCAL80 (seller table)	C

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-OTH-00118	UBIZ290	Corresponds to: Zinsco QC Series - QCAL90 (seller table)	C
EDH-OTH-00110	UBIZ30	Corresponds to: Zinsco Q Series - Q30 (seller table)	C
EDH-OTH-00124	UBIZ3030	Corresponds to: Zinsco R Series - R3830 (seller table)	C
EDH-SIE-00453	K-11-D-2554-01	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00455	K-11-D-2554-02	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00457	K-11-D-2554-03	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00459	K-11-D-2554-04	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00445	K-11-D-2555-01	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00447	K-11-D-2555-02	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00449	K-11-D-2555-03	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00451	K-11-D-2555-04	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00454	K-11-D-2556-01	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00456	K-11-D-2556-02	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00458	K-11-D-2556-03	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00460	K-11-D-2556-04	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00446	K-11-D-2557-01	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00448	K-11-D-2557-02	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00450	K-11-D-2557-03	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00452	K-11-D-2557-04	Will NOT directly replace Original P1 chassis (different mounting and bus connection points)	A
EDH-SIE-00004	MBKED3A	Factory kits with breaker: MBKED3100A, MBKED3125A (3-pole ED4)	A
EDH-SIE-00008	MBKFD3A	Kits with breaker: MBKFD3150A, MBKFD3175A, MBKFD3200A, MBKFD3225A, MBKFD3250A (3P FXD6)	A
EDH-SIE-00005	MBKQR1A	Kits with breaker: MBKQR1125A..MBKQR1225A (2P QR2 125-225A, 10kA); MBKQR1125HA..MBKQR1225HA (2P HQR2, 65kA)	A
EDH-SIE-00006	MBKQR3A	Kits with breaker: MBKQR3125A..MBKQR3225A (3P QR2); MBKQR3125HA..MBKQR3225HA (3P HQR2)	A
EDH-SIE-00010	MBKVA5262B	Kits with breaker: MBKVAM3150A/3200A/3225A/3250A (3VA52 MFAS 35kA), MBKVAH3200A/3250A (3VA52 HFAS 65kA)	A
EDH-SIE-00129	S3VA52T	Panels with factory-installed provisions made before April 2021 lack bus extensions: add kit S3VA52PR (one per breaker). Nut keepers: 3VA9233-0QA00 (3VA52, kit of 3) or 3VA9243-0QA00 (3VA61/62, kit of 3)	A
EDH-SIE-00156	S3VA52TD	Panels with factory-installed provisions made before April 2021 lack bus extensions: add kit S3VA52PR (one per breaker). Nut keepers: 3VA9233-0QA00 (3VA52, kit of 3) or 3VA9243-0QA00 (3VA61/62, kit of 3)	A
EDH-SIE-00135	S3VA53T	Missing bus extensions on factory provisions: kit S3VA53PR; nut keepers 3VA9473-0QA00 (kit of 3) or factory-installed by '2' as 12th character of breaker order no.	A
EDH-SIE-00161	S3VA53TD	Missing bus extensions on factory provisions: kit S3VA53PR; nut keepers 3VA9473-0QA00 (kit of 3) or factory-installed by '2' as 12th character of breaker order no.	A
EDH-SIE-00142	S3VA54T	S3VA53PR provision kit if bus extensions missing; nut keepers 3VA9473-0QA00	A
EDH-SIE-00168	S3VA54TD	S3VA53PR provision kit if bus extensions missing; nut keepers 3VA9473-0QA00	A
EDH-SQD-00612	8011010401	Current equivalents MHBE20 (blank) / MHKE20 (knockouts) 'one per package' for 20 in MH enclosures	C

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-SQD-00611	8011010501	Current equivalents MHBE20 (blank) / MHKE20 (knockouts) 'one per package' for 20 in MH enclosures	C
EDH-SQD-00824	HC-2636-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00826	HC-2645-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00828	HC-2654-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00830	HC-2663-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00832	HC-2672-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00834	HC-2690-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00836	HC-3238-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00838	HC-3247-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00840	HC-3256-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00842	HC-3274-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00844	HC-3292-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00846	HC-4144-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00854	HC-4144-DB	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00848	HC-4153-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00856	HC-4153-DB	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00850	HC-4162-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00858	HC-4162-DB	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00852	HC-4180-B	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00860	HC-4180-DB	Nearest current I-Line merchandised boxes are HC32xxDB9 (32 in W), HC42xxDB (42 in W x 9.5 in D) and HC4486DB (44 in W); widths changed (41 -> 42/44 in), so no direct OEM replacement is stated	C
EDH-SQD-00716	MHC23	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00717	MHC26	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-SQD-00718	MHC29	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00719	MHC32	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00720	MHC35	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00721	MHC38	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00722	MHC41	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00723	MHC44	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00724	MHC50	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00726	MHC50V	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00727	MHC53V	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00725	MHC56	Current NQ/NF MH boxes use NCxx trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00728	MHC56V	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00729	MHC59V	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00730	MHC62V	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00731	MHC65V	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00732	MHC68V	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00733	MHC74V	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00734	MHC77V	Current NQ/NF MH boxes use NCxxV trims (heights 26-86 in 6 in steps); a direct NC equivalent exists only where the height matches	C
EDH-SQD-00005	NQMB2KI	NQMB2Q or NQMB2HJ with PowerPacT Q/H/J breaker	D
EDH-SQD-00912	NQODQ2	NQODQB (itself obsolete); upgrade to NQ panelboard	A
EDH-SQD-00911	NQODQB	None; replace panelboard with current NQ	A
EDH-SQD-00609	PK22FL	Key NSR-251 is LP9618 (for all locks)	A
EDH-SQD-00321	QMB210T	QM (31 in., 1961-Oct 1984) or QW (pre-1984): QMB323TD in outside poles; QW with flat bus may need QMB310LEX	A
EDH-SQD-00324	QMB2240	No direct switch; QMB3400LA 3P 400 A breaker unit (QMB interiors 1961-Oct 1984); QMB310EX for QW; QW1BL/QW3BL fillers obsolete	A
EDH-SQD-00355	QMB303T	QMB321T (+ QMB306LEX in QW interior 1961-Oct 1984); QMB321T cannot go in QM pre-1961 or current Series E1 interiors	C
EDH-SQD-00356	QMB306T	QMB322TD in QMB interiors 1961-Oct 1984; QMB306LEX for QW with flat bus	C
EDH-SQD-00320	QMB310T	No replacement if round bus bars; QM (31 in., 1961-Oct 1984) or QW (38 in., pre-1984): QMB323TD (use outside poles); QW flat bus may also need QMB310LEX	A
EDH-SQD-00899	QMB3203T	Series D2 QMB321T (rail extension assemblies packed with every D2 switch); when used to replace a Series 1-4 3 in switch a blank filler plate is also required - purchase from local sheet-metal fabricator (drawing from Peru TAG)	A
EDH-SQD-00900	QMB3220	Series D2 QMB324 (rail extension assemblies packed with every D2 switch)	A
EDH-SQD-00323	QMB3240	No renewal parts; replace with QMB3400LA (7.5 in.) + QMB310EX + QW1BL and QW3BL fillers (obsolete; fabricate)	A
EDH-SQD-00325	QMB3260	600 A fusible no longer available; if load allows 400 A breaker use QMB3400LA (7.5 in.) + QMB310EX; old-design fillers obsolete - fabricate locally	A
EDH-SQD-00901	QMB3603T	Series D2 QMB361T (rail extension assemblies packed with every D2 switch); when used to replace a Series 1-4 3 in switch a blank filler plate is also required - purchase from local sheet-metal fabricator (drawing from Peru TAG)	A
EDH-SQD-00319	QMB3606T	No replacement on QM interior (31 in.) built before 1961; QM 1961-1984: QMB362T; QW (38 in.) pre-1984: QMB362T + QMB306EX	A

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-SQD-00902	QMB3610T	Series D2 QMB363T (rail extension assemblies packed with every D2 switch)	A
EDH-SQD-00322	QMB3620	Pre-1961 interior: none; 1961-1984: QMB364; QW panelboard/switchboard also needs QMB-320-EX	A
EDH-SQD-00322	QMB3620	Series D2 QMB364 (rail extension assemblies packed with every D2 switch)	A
EDH-SQD-00254	QMB363TW	Field-replaceable Series E1 parts listed in FAQ FA92305; see separate part records	A
EDH-SQD-00354	QMB3640	QM 1961-1984: QMB3400LA; QW: QMB3400LA + QMB310EX; QM pre-1961: none	C
EDH-SQD-00262	QMB367W	Field-replaceable Series E1 parts listed in FAQ FA92286; see separate part records	A
EDH-SQD-00961	S29371	HJPA	C
EDH-SQD-00529	SK4515	Replace complete panelboard with new I-Line	A
EDH-SQD-00530	SK4516	Replace complete panelboard with new I-Line	A
EDH-SQD-00531	SK4517	Replace complete panelboard with new I-Line	A
EDH-SQD-00532	SK4578	Replace complete panelboard with new I-Line	A
EDH-SQD-00043	SKNQOD225	No OEM replacement kit identified; NQOD interiors to be replaced by NQ (interior+box+trim)	B

11.3 Aftermarket and reproduction availability

Statements that a non-OEM or reconditioned item is offered for an OEM part. These are seller claims unless the class is A; they do not establish listing or electrical equivalence.

OEM part	Mfr	Aftermarket statement	Cl.	Src
6554C01H01	EAT	Sourcing: Breaker King SKU BFP1CH4B, manufacturer field 'EATON/Cutler-Hammer' (genuine vs aftermarket not stated)	D	S626
6554C01H02	EAT	Sourcing: Breaker King SKU BFP2CH4B, manufacturer field 'EATON/Cutler-Hammer' (genuine vs aftermarket not stated)	D	S626
6554C01H03	EAT	Sourcing: Breaker King SKU BFP3CH4B, manufacturer field 'EATON/Cutler-Hammer' (genuine vs aftermarket not stated)	D	S626
6554C02H01	EAT	Sourcing: Breaker King SKU BFP1CH, manufacturer field 'EATON/Cutler-Hammer' (genuine vs aftermarket not stated)	D	S626
6554C02H02	EAT	Sourcing: Breaker King SKU BFP2CH, manufacturer field 'EATON/Cutler-Hammer' (genuine vs aftermarket not stated)	D	S626
6554C02H03	EAT	Sourcing: Breaker King SKU BFP3CH, manufacturer field 'EATON/Cutler-Hammer' (genuine vs aftermarket not stated)	D	S626
KCDPCA	EAT	Breaker King offers BCDPCACH (kit # CA1K) as a replacement ('Kit CA1K replaces OEM KCDPCA'), condition not stated	C	S630
KCDPFB150	EAT	Breaker King offers BCDPFBCH (kit # FB1K) as a replacement ('Kit FB1K replaces OEM KCDPFB150'), condition not stated	C	S630
KCDPKB	EAT	Breaker King offers BCDPKBCH (kit # KB1K) as a replacement ('Kit KB1K replaces OEM KCDPKB'), condition not stated	C	S630
KCDPLA400	EAT	Breaker King offers BCDPLACH (kit # LA4K) as a replacement ('Kit LA4K replaces OEM KCDPLA400'), condition not stated	C	S630
KCDPLA600	EAT	Breaker King offers BCDPLCCH (kit # LA6K) as a replacement ('Kit LA6K replaces OEM KCDPLA600'), condition not stated	C	S630
KCDPLB	EAT	Breaker King offers BCDPLBCH (kit # LB1K) as a replacement ('Kit LB1K replaces OEM KCDPLB'), condition not stated	C	S630
KCDPMA	EAT	Breaker King offers BCDPMACH (kit # MA8K) as a replacement ('Kit MA8K replaces OEM KCDPMA'), condition not stated	C	S630
KCDPNB	EAT	Breaker King offers BCDPNBCH (kit # NB12K) as a replacement ('Kit NB12K replaces OEM KCDPNB'), condition not stated	C	S630
KPRL3AED3	EAT	Breaker King offers BPRL3AEDCH (kit # ED3K) as a replacement ('Kit # ED3K replaces OEM KPRL3AED3'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL3AFD3	EAT	Breaker King offers BPRL3AFDCH (kit # FD3K) as a replacement ('Kit # FD3K replaces OEM KPRL3AFD3'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4CA	EAT	Breaker King offers BPRLCACH (kit # CA4K) as a replacement ('Kit # CA4K replaces OEM KPRL4CA'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4ED	EAT	Breaker King offers BPRLEDCH (kit # ED4K) as a replacement ('Kit # ED4K replaces OEM KPRL4ED'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4ED	EAT	Breaker King offers BPRL4BEDCH (kit # ED4BK) as a replacement ('Kit #ED4BK replaces OEM KPRL4ED'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4FD	EAT	Still stocked by Elliott Electric (UPC 782114795941, UL 67, 'PRL4 Conn Kit Twin MTD 3P E/F-FRM BKR')	C	S10

OEM part	Mfr	Aftermarket statement	Cl.	Src
KPRL4FD	EAT	Distributors list as 3P twin mount 225 A for EHD/FD/FDB/HFD/FDC; Elliott Electric marks item inactive	C	S25
KPRL4FD	EAT	Breaker King offers BPRLFDCH as a replacement ('OEM Item KPRL4FD Is ... (truncated on listing)'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4FD	EAT	Breaker King offers BPRL4BFDCH (kit # FD4BK) as a replacement ('Kit # FD4BK replaces OEM KPRL4FD'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4FD	EAT	Superbreakers sells 'Eaton/Cutler-Hammer KPRL4FD Equivalent Twin Mount Mounting Hardware': 'Cutler-Hammer Equivalent Circuit Breaker Mounting Hardware ... for direct replacement ... PRL4A and PRL4B bolt-on panel boards ... comes with all associated hardware including panel cover and screws ... in stock new'	C	S445
KPRL4JDS	EAT	Breaker King offers BPRLJDSCH (kit # JDS4K) as a replacement ('Kit # JDS4K replaces OEM KPRL4JDS'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4JDS	EAT	Breaker King offers BPRL4BJDSCH (kit # JDS4BK) as a replacement ('Kit # JDS4BK replaces OEM KRPL4JDS (sic; read as KPRL4JDS)'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4JDT	EAT	Breaker King offers BPRLJDTCH (kit # JD4K) as a replacement ('Kit # JD4K replaces OEM KPRL4JDT'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4KDS	EAT	Sold as surplus/reconditioned on eBay titled 'POW-R-LINE C' single-mount kit 400A 3P	C	S24
KPRL4KDS	EAT	Breaker King offers BPRLKDSCH (kit # KDS4K) as a replacement ('Kit # KDS4K replaces OEM KPRL4KDS'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4KDS	EAT	Breaker King offers BPRL4BKDSCH (kit # KDS4BK) as a replacement ('Kit # KDS4BK replaces OEM KPRL4KDS'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4KDT	EAT	Breaker King offers BPRLKDTCH as a replacement ('OEM Item KPRL4KDT Is Provided as PCS Brand Aftermarket Kit'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4LD	EAT	Breaker King offers BPRLLDCH (kit # LA4K) as a replacement ('Kit # LA4K replaces OEM KPRL4LD'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4LDS	EAT	Breaker King offers BPRL4BLDSCH (kit # LDS4BK) as a replacement ('Kit # LDS4BK replaces OEM KPRL4LDS'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4MD	EAT	Breaker King offers BPRLMDCH (kit # MD4K) as a replacement ('Kit # MD4K replaces OEM KPRL4MD'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KPRL4ND	EAT	Breaker King offers BPRLNDCH (kit # ND4K) as a replacement ('Kit # ND4K replaces OEM KPRL4ND'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
PH6C3	EAT	Breaker King offers BPHCCH (kit # PH6CK) as a replacement ('Kit # PH6CK Replaces OEM PH6C3'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
PH6E-3	EAT	Breaker King offers BPHECH (kit # PH6EK) as a replacement ('Kit # PH6EK replaces OEM PH6E3'), labelled 'EATON/Cutler Aftermarket Repl'	C	S626
KBDP1C	FPE	Breaker King offers BBDPNEF10FPE (kit # NEF3K) as a replacement ('Kit # NEF3K replaces OEM KBDP1C'), labelled '(PCS) Aftermarket Assembly'	C	S206
KBDP2C	FPE	Breaker King offers BBDPNEJFPE (kit # NEJ3K) as a replacement ('Kit # NEJ3K replaces OEM KBDP2C'), labelled '(PCS) Aftermarket Assembly'	C	S206
KBDP4C	FPE	Breaker King offers BBDPNJLFPE (kit # NJL3K) as a replacement ('Kit # NJL3K replaces OEM KBDP4C'), labelled '(PCS) Aftermarket Assembly'	C	S206
KCDP1C	FPE	Breaker King offers BCDPNEF10FPE (kit # NEF1K) as a replacement ('Kit # NEF1K replaces OEM KCDP1C'), labelled 'FPE Aftermarket Replacement'	C	S206
KCDP2C	FPE	Breaker King offers BCDPNEJFPE (kit # NEJ1K) as a replacement ('Kit # NEJ1K replaces OEM KCDP2C'), labelled 'FPE Aftermarket Replacement'	C	S206
KCDP3C	FPE	Breaker King offers BCDPNFJFPE (kit # NFJ1K) as a replacement ('Kit # NFJ1K replaces OEM KCDP3C'), labelled 'FPE Aftermarket Replacement'	C	S206
KCDP4C	FPE	Breaker King offers BCDPNJLFPE (kit # NJL1K) as a replacement ('Kit # NJL1K replaces OEM KCDP4C'), labelled 'FPE Aftermarket Replacement'	C	S206
AMC6EYFP	GEA	Sourcing: Breaker King stocks under SKU BAMC6EYGE ('Kit # AMC6EYFP; APN plug-on, 1 or 2 TEY frame'); condition (new/surplus/aftermarket) not stated	D	S627
AMC6QBFP	GEA	Sourcing: Breaker King stocks under SKU BAMC6QBGE ('OEM # AMC6QBFP; obsolete APN plug-on module, up to 6 poles THQB/THHQB'); condition (new/surplus/aftermarket) not stated	D	S627
AMCB3FJFP	GEA	Breaker King offers BAMCB3FJGE (kit # SFS1K) as a replacement ('Kit SFS1K; Replaces OEM AMCB3FJFP'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
AMCB3GMFP	GEA	Breaker King offers BAMCB3GMGE (kit # SGS1K) as a replacement ('Kit SGS1K; Replaces OEM AMCB3GMFP'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
AMCB3KMFP	GEA	Breaker King offers BAMCB35KMGE (kit # SKS1K) as a replacement ('Kit SKS1K; Replaces OEM AMCB35KMFP (sic; OEM catalog number is AMCB3KMFP)'), labelled 'GE/ABB Aftermarket Replacement'	C	S627

OEM part	Mfr	Aftermarket statement	Cl.	Src
AMCB6EBFP	GEA	Breaker King offers BAMCB6EBGE (kit # SED1K) as a replacement ('Kit SED1K; Replaces OEM AMCB6EBFP'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
AMCB6EYFP	GEA	Breaker King offers BAMCB6EYGE (kit # SEY1K) as a replacement ('Kit SEY1K; Replaces OEM AMCB6EYFP'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
AMCB6FJFP	GEA	Breaker King offers BAMCB6FJGE (kit # SFD1K) as a replacement ('Kit SFD1K; Replaces OEM AMCB6FJFP'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
AMCB6GBFP	GEA	Breaker King offers BAMCB6GBGE (kit # SGD1K) as a replacement ('Kit SGD1K; Replaces OEM AMCB6GBFP'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
AMCB6QDFP	GEA	Breaker King offers BAMCB6QDGE (kit # SQD1K) as a replacement ('Kit SQD1K; Replaces OEM AMCB6QDFP'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
ASPTED3P	GEA	Sourcing: Breaker King stocks under SKU BASPTED ('Kit OEM # ASPTED3P; A Series I only, not A Series II; mounts one TED 3-pole'); condition (new/surplus/aftermarket) not stated	D	S627
ASPTQD3P	GEA	Sourcing: Breaker King stocks under SKU BASPTQD ('Kit OEM # ASPTQD3P; A Series I only; one TQD 3-pole'); condition (new/surplus/aftermarket) not stated	D	S627
GAVFP2	GEA	Sourcing: Breaker King SKU BFP2CCBGE (manufacturer field GE/ABB; condition not stated)	D	S627
GAVFP3	GEA	Sourcing: Breaker King SKU BFP3CCBGE (GE/ABB; condition not stated)	D	S627
NHB150PK	GEA	Breaker King offers BNHB150GE as a replacement ('OEM Item NHB150PK Is Provided as PCS Brand ... (truncated)'), labelled 'GE/ABB'	C	S627
NHB150PK	GEA	Superbreakers sells 'NHB150PK - General Electric Circuit Breaker Equivalent Mounting Hardware ... twin mount equivalent hardware kit for ... General Electric NAB or NHB model panel boards ... includes screws, a panel cover and brackets'. Breaker King lists BNHB150GE: 'OEM Item NHB150PK Is Provided as PCS Brand ...'	C	S445, S627
NLAB100PK	GEA	Sourcing: Breaker King stocks under SKU BNLAB100GE ('Kit OEM # NLAB100PK; obsolete NLAB panelboards, mounts two 3-pole THQB breakers'); condition (new/surplus/aftermarket) not stated	D	S627
SG6DPK	GEA	Breaker King offers BSGDGE (kit # SGD6K) as a replacement ('Kit SGD6K; Replaces OEM SG6DPK'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
TED1DPK	GEA	Breaker King offers BTEDGE (kit # TED1K) as a replacement ('Kit # TED1K replaces OEM TED1DPK'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
TEL1DPK	GEA	Breaker King offers BTELGE (kit # TEL1K) as a replacement ('Kit # TEL1K replaces OEM TEL1DPK'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
TF2DPK	GEA	Breaker King offers BTFKGE (kit # TFK1K) as a replacement ('Kit # TFK1K replaces OEM TF2DPK'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
TJ4DPK	GEA	Breaker King offers BTJK4GE (kit # TJK4K) as a replacement ('Kit # TJK4K replaces OEM TJ4DPK'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
TJ6DPK	GEA	Breaker King offers BTJK6GE (kit # TJK6K) as a replacement ('Kit # TJK6K replaces OEM TJ6DPK'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
TK12SPK	GEA	Breaker King offers BTK12GE (kit # TKM12K) as a replacement ('Kit TKM12K; Replaces OEM TK12SPK'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
TK8SPK	GEA	Breaker King offers BTK8GE (kit # TKM8K) as a replacement ('Kit TKM8K; Replaces OEM TK8SPK'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
TQ2DPK	GEA	Distributor listings (e.g. Stanion 'tq2dpkge') describe TQ2DPK as 'For Use With: TQD Frame 125 to 225 A Circuit Breaker and Spectra Series CCB, QMR Panelboard'	C	S163
TQ2DPK	GEA	Breaker King offers BTQDGE (kit # TQD1K) as a replacement ('Kit # TQD1K replaces OEM TQ2DPK'), labelled 'GE/ABB Aftermarket Replacement'	C	S627
BBDPNEF10FPE	OTH	Seller identifies maker/brand as 'PCS' aftermarket kit	C	S206
BBDPNEJFPE	OTH	Seller identifies maker/brand as 'PCS' aftermarket kit	C	S206
BBDPNJLFPE	OTH	Seller identifies maker/brand as 'PCS' aftermarket kit	C	S206
BNHB150GE	OTH	Seller identifies maker/brand as 'PCS' aftermarket kit	C	S627
BPRLKDTCH	OTH	Seller identifies maker/brand as 'PCS' aftermarket kit	C	S626
UBIF015N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF020N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF0215N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615

OEM part	Mfr	Aftermarket statement	Cl.	Src
UBIF0220N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF0230N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF0240N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF0250N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF030N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF040N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF050N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF15N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615, S616
UBIF20N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF215N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF220N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF230N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF240N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF250N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF260N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF270N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF30N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF40N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIF50N	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified and approved for use in Federal Pacific load centers. ETL Listed.'	C	S615
UBIP115	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIP120	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615, S617

OEM part	Mfr	Aftermarket statement	Cl.	Src
UBIP130	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIP1515	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIP1520	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIP2020	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIP2100	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIP215	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIP220	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIP230	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIP240	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIP250	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIP260	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIP270	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'; distributor states 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'	C	S615
UBIZ0220	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ0230	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ0240	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ0250	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ0260	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ15	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ1515	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ1520	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ20	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ2020	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ2100	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ2125	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ220	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615

OEM part	Mfr	Aftermarket statement	Cl.	Src
UBIZ230	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ240	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ250	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ260	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ270	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ280	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ290	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ30	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
UBIZ3030	OTH	Aftermarket newly-manufactured replacement breaker. Seller states 'Meet or exceed ANSI/UL 489 Standard' and 'conform to the ANSI/UL Standard 489, 9th Edition'	C	S615
5FJ2	SIE	Breaker King offers BFJITE (kit # FJ3K) as a replacement ('Kit # FJ3K. Replaces OEM 5FJ2'), condition not stated	C	S628
5JJ2	SIE	Breaker King offers BJLITE (kit # JJ3K) as a replacement ('Kit # JJ3K. Replaces OEM 5JJ2'), condition not stated	C	S628
6E62	SIE	Breaker King offers BEDITE (kit # ED65K) as a replacement ('Kit # ED65K replaces OEM 6E62 and SE6D'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
6F62	SIE	Breaker King offers BFDITE (kit # FD65K) as a replacement ('Kit # FD65K replaces OEM 6F62 and SF6D'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
6FPB01	SIE	Sourcing: Breaker King stocks under SKU BFP1SE ('1X filler blank 1-1/4 in H x 19 in W for CDP6/S4/S5/P4/P5 (description lists 6FPB01 SFP01)'); condition (new/surplus/aftermarket) not stated	D	S628
6JJ61	SIE	Breaker King offers BJDSGLITE (kit # JDS65K) as a replacement ('Kit # JDS65K replaces OEM 6JJ61 and SJ1D'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
6JJ62	SIE	Breaker King offers BJDITE (kit # JD65K) as a replacement ('Kit # JD65K replaces OEM 6JJ62 and SJ2D'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
6LL61	SIE	Breaker King offers BLDITE (kit # LD65K) as a replacement ('Kit # LD65K replaces OEM 6LL61 and SL6D'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
6QJ2	SIE	Breaker King offers BQJITE (kit # QJ65K) as a replacement ('Kit # QJ65K replaces OEM 6QJ2 and SQJD'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
BBKB32	SIE	Sourcing: Breaker King stocks under SKU BP2BLBQDITE ('Kit # BBKB32; P2/P3 two BL or BQD'); condition (new/surplus/aftermarket) not stated	D	S628
BBKED32	SIE	Sourcing: Breaker King stocks under SKU BP2EDITE ('Kit # BBKED32; P2/P3 two ED2/ED4/ED6'); condition (new/surplus/aftermarket) not stated	D	S628
BBKGB32	SIE	Sourcing: Breaker King stocks under SKU BP2GBITE ('OEM P/N BBKGB32; P2/P3 six poles NGB/HGB/LGB twin'); condition (new/surplus/aftermarket) not stated	D	S628
BBKNB32	SIE	Sourcing: Breaker King stocks under SKU BP2NGBITE ('Kit # BBKNB32; P2/P3 two 2P/3P NGB'); condition (new/surplus/aftermarket) not stated	D	S628
BBKQ1	SIE	Sourcing: Breaker King stocks under SKU BP2QJITE ('Kit # BBKQ1; P2 one 2P/3P QJ'); condition (new/surplus/aftermarket) not stated	D	S628
BBKQR1	SIE	Sourcing: Breaker King stocks under SKU BP2QRITE ('OEM P/N BBKQR1; P2 one QR/HQR single branch'); condition (new/surplus/aftermarket) not stated	D	S628
DFFP3	SIE	Sourcing: Breaker King stocks under SKU BP2FP3 ('3 in deadfront filler blank for P1/P2 (description lists DFFP3)'); condition (new/surplus/aftermarket) not stated	D	S628
DFFP6	SIE	Sourcing: Breaker King stocks under SKU BP2FP6 ('6 in deadfront filler blank for P1/P2 (description lists DFFP6)'); condition (new/surplus/aftermarket) not stated	D	S628
MBKBC3	SIE	Sourcing: Breaker King stocks under SKU BMBKBQ3 ('OEM P/N MBKBC3 (titled 'P1 BQD Hardware')'); condition (new/surplus/aftermarket) not stated	D	S628
MBKBL3	SIE	Sourcing: Breaker King stocks under SKU BMBKBL3 ('OEM P/N MBKBL3; P1 one 3-pole BL/HBL main or branch'); condition (new/surplus/aftermarket) not stated	D	S628
MBKED3	SIE	Sourcing: Breaker King stocks under SKU BMBKED3 ('OEM P/N MBKED3; P1 one 3-pole ED main or branch'); condition (new/surplus/aftermarket) not stated	D	S628
MBKFD3A	SIE	Sourcing: Breaker King stocks under SKU BMBKFD3A ('OEM P/N MBKFD3A; P1-T one 3-pole FD main or branch'); condition (new/surplus/aftermarket) not stated	D	S628

OEM part	Mfr	Aftermarket statement	Cl.	Src
MBKJD1	SIE	Sourcing: Breaker King stocks under SKU BMBKJD1 ('OEM P/N MBKJD1; P1 one 2-pole JD main only'); condition (new/surplus/aftermarket) not stated	D	S628
MBKQJ3	SIE	Sourcing: Breaker King stocks under SKU BMBKQJ3 ('OEM P/N MBKQJ3; P1 one 3-pole QJ/HQJ main or branch'); condition (new/surplus/aftermarket) not stated	D	S628
MBKQJ3A	SIE	Sourcing: Breaker King stocks under SKU BMBKQJ3A ('OEM P/N MBKQJ3A; P1-T one 3-pole QJ/HQJ main or subfeed'); condition (new/surplus/aftermarket) not stated	D	S628
MBKQR3A	SIE	Sourcing: Breaker King stocks under SKU BMBKQR3A ('OEM P/N MBKQR3A; P1-T one 3-pole QR/HQR main or subfeed'); condition (new/surplus/aftermarket) not stated	D	S628
SBL	SIE	Sourcing: Breaker King stocks under SKU BBLITE ('Kit # SBL; six-pole BL frame, S4/P4/SPP'); condition (new/surplus/aftermarket) not stated	D	S628
SE6	SIE	Breaker King offers BEDSITE (kit # ED64K) as a replacement ('Replaces OEM SE6'), labelled 'SIEMENS Aftermarket Repl'	C	S628
SE6D	SIE	Breaker King offers BEDITE (kit # ED65K) as a replacement ('Kit # ED65K replaces OEM 6E62 and SE6D'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
SEB	SIE	Breaker King offers BSEBP4 (kit # NEB64K) as a replacement ('Replaces OEM SEB'), labelled 'SIEMENS Aftermarket Repl'	C	S628
SF6	SIE	Breaker King offers BFDSITE (kit # FD64K) as a replacement ('Replaces OEM SF6'), labelled 'SIEMENS Aftermarket Repl'	C	S628
SF6D	SIE	Breaker King offers BFDITE (kit # FD65K) as a replacement ('Kit # FD65K replaces OEM 6F62 and SF6D'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
SJ1	SIE	Breaker King offers BJDSITE (kit # JD64K) as a replacement ('Replaces OEM SJ1'), labelled 'SIEMENS Aftermarket Repl'	C	S628
SJ1D	SIE	Breaker King offers BJDSGLITE (kit # JDS65K) as a replacement ('Kit # JDS65K replaces OEM 6JJ61 and SJ1D'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
SJ2D	SIE	Breaker King offers BJDITE (kit # JD65K) as a replacement ('Kit # JD65K replaces OEM 6JJ62 and SJ2D'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
SL6	SIE	Sourcing: Breaker King stocks under SKU BLDSITE ('Kit # SL6; one LD6 frame, S4/P4/SPP'); condition (new/surplus/aftermarket) not stated	D	S628
SL6D	SIE	Breaker King offers BLDITE (kit # LD65K) as a replacement ('Kit # LD65K replaces OEM 6LL61 and SL6D'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
SLM1D	SIE	Sourcing: Breaker King stocks under SKU BLMDITE ('Kit # SLM1D; one LMD6 frame, 12-3/4 in deep enclosures (labelled aftermarket, no 'replaces' text)'); condition (new/surplus/aftermarket) not stated	D	S628
SMND	SIE	Breaker King offers BMDITE (kit # ND65K) as a replacement ('Replaces OEM SMND'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
SQJ	SIE	Breaker King offers BQJSITE (kit # QJ64K) as a replacement ('Replaces OEM SQJ'), labelled 'SIEMENS Aftermarket Repl'	C	S628
SQJD	SIE	Breaker King offers BQJITE (kit # QJ65K) as a replacement ('Kit # QJ65K replaces OEM 6QJ2 and SQJD'), labelled 'SIEMENS/I-T-E Aftermarket Repl'	C	S628
QW1BL	SQD	Fabricated filler plates (local sheet metal shop) per OEM suggestion	A	S135
QW3BL	SQD	Fabricated filler plates (local sheet metal shop) per OEM suggestion	A	S135
SK4515	SQD	Breaker King offers BSK4515 as a replacement ('Equal To - OEM # SK4515'), labelled 'Aftermarket'	C	S629
SK4516	SQD	Breaker King offers BSK4516 as a replacement ('Equal To - OEM # SK4516'), labelled 'Aftermarket'	C	S629
SK4517	SQD	Breaker King offers BSK4517 as a replacement ('Equal To - OEM # SK4517'), labelled 'Aftermarket'	C	S629
SK4578	SQD	Breaker King offers BSK4578 as a replacement ('Equal To - OEM # SK4578'), labelled 'Aftermarket'	C	S629
SK-5666	SQD	Sourcing: Breaker King SKU BSK5666; condition not stated	D	S629
SKNQOD225	SQD	Reproduction of 80110-005-01/-006-01 fingers is a candidate; no listed equivalent	D	
UBIZRBK12	ZIN	Aftermarket replacement - not Zinsco OEM; buyer review reports bars may need trimming to fit	C	S222
UBIZRBK12	ZIN	Aftermarket replacement bus kit by Connecticut Electric (UBI); retailer spec field reads 'Certification: UL Listed' and warranty 5 years; made in China. Customer reviews report bars a few inches too long (cut to fit) and UBIZ breakers sitting slightly longer than original Zinsco.	D	S222

11.4 Companion parts required for installation

Part	Requires
3TA631LK (EDH-EAT-00543)	LTS3K

Part	Requires
4TA631LK (EDH-EAT-00544)	LTS4K
3T631LK (EDH-EAT-00545)	LTS3K
4T631LK (EDH-EAT-00546)	LTS4K
3TA632LK (EDH-EAT-00547)	LTS3K
4TA632LK (EDH-EAT-00548)	LTS4K
3T632LK (EDH-EAT-00549)	LTS3K
4T632LK (EDH-EAT-00550)	LTS4K
FCWTK (EDH-EAT-00617)	3T100FB
PDSPD4803SA2A-K3 (EDH-EAT-01228)	KPRL3AFD3
PDSPD4803SA2A-K4 (EDH-EAT-01229)	KPRL4FD
PDSPD2403SA2A-K3 (EDH-EAT-01230)	KPRL3AFD3
PDSPD2403SA2A-K4 (EDH-EAT-01231)	KPRL4FD
ASPP6QD6D (EDH-GEA-00001)	139C5702AQDG1, 139C5702BQDG1, 139C5702CQDG1, 139C5500P81, 139C5503P64
ASPP6SE6D (EDH-GEA-00002)	139C5702ASEG1, 139C5702BSEG1, 139C5702CSEG1, 139C5500P82, 139C5503P77
ASPP6SF3S (EDH-GEA-00003)	139C5702ASFG1, 139C5702BSFG1, 139C5702CSFG1, 139C5500P84, 139C5503P90
ASPP6SG3S (EDH-GEA-00004)	315A7046P7, 315A7046P8, 315A7046P9, 139C5500P83, 139C5503P103
ASPP6FB6D (EDH-GEA-00005)	139C5702ASEG1, 139C5702BSEG1, 139C5702CSEG1, 139C5700P86, 139C5503P77
ASPP6QB6D (EDH-GEA-00006)	315A7049P10, 315A7048P20, 911E347P3, 139C5362P2
ASPP6QB12D (EDH-GEA-00007)	315A7049P10, 315A7048P20, 911E347P3, 139C5362P2
ASPP6EY6D (EDH-GEA-00008)	315A7049P10, 315A7048P20, 911E347P3, 139C5503P129
ASPP6EY12D (EDH-GEA-00009)	315A7049P10, 315A7048P20, 911E347P3, 139C5503P129
AMCB4QDFP (EDH-GEA-00102)	AFP2QDD
AMCB6QDFP (EDH-GEA-00108)	AFP3QDD
AFP6SKS (EDH-GEA-00144)	455C592P1, 455C592P2, 252B1768G1, 252B1768G2
AMC6EYFP (EDH-GEA-00146)	AFP3EYD
AMC6FBFP (EDH-GEA-00147)	AFP3FBD
AMC6EBFP (EDH-GEA-00149)	AFP3SED
AMC6QDFP (EDH-GEA-00150)	AFP3QDD
AMC6FJFPTF (EDH-GEA-00151)	AFP3TFD
AMC6FJFP (EDH-GEA-00152)	AFP3SFD
AMC6FGBFP (EDH-GEA-00154)	AFP4FGD
AMC6GBFP (EDH-GEA-00155)	AFP4SGD
AMC3FJFPTF (EDH-GEA-00159)	AFP3TFS
AMC3FJFP (EDH-GEA-00160)	AFP3SFS
AMC3FGMFP (EDH-GEA-00162)	AFP4FGS
AMC3GMFP (EDH-GEA-00163)	AFP4SGS
AMC3KMFP (EDH-GEA-00164)	AFP6SKS
AMC4EBFP (EDH-GEA-00167)	AFP2TED
AMC4SEFP (EDH-GEA-00168)	AFP3SED
AMC4QDFP (EDH-GEA-00169)	AFP2QDD
AMC4FJFPTF (EDH-GEA-00170)	AFP3TFD
AMC4FJFP (EDH-GEA-00171)	AFP3SFD
AMC4FGBFP (EDH-GEA-00173)	AFP4FGD
AMC4GBFP (EDH-GEA-00174)	AFP4SGD
AMC2FJFPTF (EDH-GEA-00178)	AFP3TFS
AMC2FJFP (EDH-GEA-00179)	AFP3SFS
AMC2FGMFP (EDH-GEA-00181)	AFP4FGS
AMC2GMFP (EDH-GEA-00182)	AFP4SGS
AMC2KMFP (EDH-GEA-00183)	AFP6SKS

Part	Requires
TCAL61 (EDH-GEA-00304)	789A448G1
TC061 (EDH-GEA-00307)	789A448G1
TCAL81 (EDH-GEA-00308)	789A448G1
TC081A (EDH-GEA-00311)	789A448G1
TCAL121 (EDH-GEA-00312)	789A448G2
TC0121 (EDH-GEA-00315)	789A448G2
AMCB6EB (EDH-GEA-00396)	AHKBE1
AMCB4SE (EDH-GEA-00397)	AHKBE1
AMCB4EB (EDH-GEA-00398)	AHKBE1
AMCB6FJ (EDH-GEA-00399)	AHKBF1
AMCB3FJ (EDH-GEA-00400)	AHKBF1
AMCB2FJ (EDH-GEA-00401)	AHKBF1
AMCB4FJ (EDH-GEA-00402)	AHKBF1
AMCB2GM (EDH-GEA-00403)	252B3618G13, 252B3618G14, 252B3618G15, 252B3576P1, 10083041P1, AHKBG1
AMCB3GM (EDH-GEA-00404)	252B3618G13, 252B3618G14, 252B3618G15, 252B3576P1, 10083041P1, AHKBG1
AMCB4GB (EDH-GEA-00405)	252B3618G10, 252B3618G11, 252B3575P1, 208C2291P1
AMCB6GB (EDH-GEA-00406)	252B3618G10, 252B3618G11, 252B3575P1, 208C2291P1
AMB2600MA (EDH-GEA-00509)	252B3638
AMB3600MA (EDH-GEA-00510)	252B3638
AMB2600MC (EDH-GEA-00511)	252B3638
AMB3600MC (EDH-GEA-00512)	252B3638
AMB2120MA (EDH-GEA-00513)	252B3638
AMB3120MA (EDH-GEA-00514)	252B3638
AMB3120MC (EDH-GEA-00515)	252B3638
AMB2120DMC (EDH-GEA-00516)	252B3638
AMB3120DMC (EDH-GEA-00517)	252B3638
AMB2120DMA (EDH-GEA-00518)	252B3638
AMB3120DMA (EDH-GEA-00519)	252B3638
AMB2120N (EDH-GEA-00520)	252B3638
AMB3120N (EDH-GEA-00521)	252B3638
AMB2120DN (EDH-GEA-00522)	252B3638
AMB3120DN (EDH-GEA-00523)	252B3638
AMB2250CA (EDH-GEA-00524)	252B3638
AMB3250CA (EDH-GEA-00525)	252B3638
AMB2600CA (EDH-GEA-00526)	252B3638
AMB3600CA (EDH-GEA-00527)	252B3638
AMB2800CA (EDH-GEA-00528)	252B3638
AMB3800CA (EDH-GEA-00529)	252B3638
AMB2120CA (EDH-GEA-00530)	252B3638
AMB3120CA (EDH-GEA-00531)	252B3638
AMB2250DCA (EDH-GEA-00532)	252B3638
AMB3250DCA (EDH-GEA-00533)	252B3638
AMB2600DCA (EDH-GEA-00534)	252B3638
AMB3600DCA (EDH-GEA-00535)	252B3638
AMB2800DCA (EDH-GEA-00536)	252B3638
AMB3800DCA (EDH-GEA-00537)	252B3638
AMB2120DCA (EDH-GEA-00538)	252B3638
AMB3120DCA (EDH-GEA-00539)	252B3638
P1CONACPHCU (EDH-SIE-00088)	P1SCRWS
P1CONBPHAL (EDH-SIE-00089)	P1SCRWS
P1CONBPHCU (EDH-SIE-00090)	P1SCRWS
P1CONACPHAL (EDH-SIE-00097)	P1SCRWS

Part	Requires
BBKVA5262P2S (EDH-SIE-00112)	BBKVA5262P2HW
BBKVA52P3T (EDH-SIE-00114)	BBKVA52P3HW
TC1Q1 (EDH-SIE-00245)	TNKG3
3TC1Q1 (EDH-SIE-00246)	TNKG3
3TC1GG20 (EDH-SIE-00248)	TNKG3
NQMB2Q (EDH-SQD-00001)	NQHJQLLC
NQMB2HJ (EDH-SQD-00003)	NQHJQLLC, S37444, S37445
NQMB4LA (EDH-SQD-00006)	NQLALLC
NQMB6PPL (EDH-SQD-00007)	NQPPLLLC
NQN6CRUS (EDH-SQD-00027)	NFNQCRBOND46
N150MH (EDH-SQD-00063)	NFHJLLC, S37444
N250MJ (EDH-SQD-00064)	NFHJLLC, S37445
N400M (EDH-SQD-00065)	NFLALLC
N600MPPL (EDH-SQD-00066)	NFPPLLLC
S33930 (EDH-SQD-00213)	AL1200R53K
AL150HD (EDH-SQD-00302)	S37446, S37447
AL175JD (EDH-SQD-00303)	S37448
AL250JD (EDH-SQD-00304)	S37448
4051749901 (EDH-SQD-00361)	8011417101
YA060HD (EDH-SQD-00395)	S37449
YA150HD (EDH-SQD-00396)	S37449
YA150JD (EDH-SQD-00397)	S37450
YA250J35 (EDH-SQD-00398)	S37450
CYA060HD (EDH-SQD-00408)	S37449
CYA150HD (EDH-SQD-00409)	S37449
CYA150JD (EDH-SQD-00410)	S37450
CYA250J3 (EDH-SQD-00411)	S37450
S432475 (EDH-SQD-00441)	S36967
S432476 (EDH-SQD-00442)	S36967
32508 (EDH-SQD-00468)	29348

12 Indexes

12.1 Manufacturer index

Code	Lineage	Brand markings	Families	Parts	Pg
EAT	Eaton lineage	Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant	41	1335	20
SQD	Square D / Schneider Electric	Square D, Schneider Electric, Federal Pioneer (Canada)	15	969	702
GEA	GE / ABB lineage	General Electric Industrial Solutions; ABB from 2018; ReliaGear	15	1060	1053
SIE	Siemens lineage	Siemens, ITE, ITE Imperial, Gould, Murray	15	819	1468
FPE	Federal Pacific Electric	Federal Pacific Electric (Stab-Lok, NA/NE/NF/NH panelboards)	7	43	1847
ZIN	Zinsco / Sylvania	Zinsco, GTE-Sylvania	2	25	1871
OTH	Other manufacturers	Other / unassigned	5	144	1890

12.2 Equipment family index (including aliases)

Name / alias	Family	Mfr	Type	ID	Pg
3FQS	Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	EAT	panelboard	FAM-EAT-031	390
5P	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-015	506
A Series	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
A-SERIES	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
A-Series Column Panelboards (ALC, AQC, AEC)	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	1095
A-Series II	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
A-Series II Powerpanel	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	1096
A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	1096
A-SERIES-COL	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	1095
A-SERIES-PWR	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	1096
A1B	Square D NA1B panelboard (E-frame bolted, AC/DC)	SQD	panelboard	FAM-SQD-012	787
A2B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
ABH	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
ABH	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	1150
AD	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
AD Plus	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
AD/AE/AQ Type P & N Power Panel	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	1096
ADP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	1096

Name / alias	Family	Mfr	Type	ID	Pg
AE	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
AEC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	1095
AEF	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
AEP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	1096
AL	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
ALC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	1095
APN	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	1184
APNB	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	1184
AQ	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
AQC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	1095
AQF	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
AQP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	1096
AS	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
AV Line	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	1372
AV-1	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	1372
AV-2	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	1372
AV-LINE	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	1372
AV-Line	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	1372
AV-Line switchboards (legacy)	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	1372
AV1	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	1372
AV2	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	1372
BDP	FPE BDP distribution panelboard (double-hole bus)	FPE	panelboard	FAM-FPE-002	1847
BDP panel board	FPE BDP distribution panelboard (double-hole bus)	FPE	panelboard	FAM-FPE-002	1847
BDP Spectra bolt-on (as listed by Superbreakers - likely erroneous)	FPE BDP distribution panelboard (double-hole bus)	FPE	panelboard	FAM-FPE-002	1847
BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	22
Bryant BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	22
Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	1603
Bulldog Pushmatic	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	1603
CCB	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	1110
CCB-QMR	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	1110
CDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	70
CDP	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	1852

Name / alias	Family	Mfr	Type	ID	Pg
CDP 5.25	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	1469
CDP panel board	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	1852
CDP panelboard	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	1852
CDP pre-Series 5	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	1469
CDP-5	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
CDP-6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
CDP-7	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	1469
CDP-ITE	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	1469
CDP/HCDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	70
CDP6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
CDP7	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	1469
CDP?	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	1110
CEB	Commander / CEB panels (Zinsco-type)	OTH	loadcenter	FAM-OTH-003	1890
CH lighting panel	Cutler-Hammer CHP / CHB lighting panelboards	EAT	panelboard	FAM-EAT-039	113
CH-BR-RETRO	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	32
CHA-PM4	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	106
Challenger BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	22
Challenger distribution panelboards (PM4a / PM4b)	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	106
Challenger panelboard	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	106
CHB panelboard	Cutler-Hammer CHP / CHB lighting panelboards	EAT	panelboard	FAM-EAT-039	113
CHP	Cutler-Hammer CHP / CHB lighting panelboards	EAT	panelboard	FAM-EAT-039	113
CHP/CHB	Cutler-Hammer CHP / CHB lighting panelboards	EAT	panelboard	FAM-EAT-039	113
Class 2110	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
Class 4620	QMB fusible panelboard (Class 4620)	SQD	panelboard	FAM-SQD-007	923
Class II	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
column panelboard	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	165
COMMANDER	Commander / CEB panels (Zinsco-type)	OTH	loadcenter	FAM-OTH-003	1890
Commander / CEB panels (Zinsco-type)	Commander / CEB panels (Zinsco-type)	OTH	loadcenter	FAM-OTH-003	1890
Converti-Fuse	Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	GEA	panelboard	FAM-GEA-012	1149
CONVERTI-FUSE	Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	GEA	panelboard	FAM-GEA-012	1149
Convertible Circuit Breaker panelboard	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	1110
CPD	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	70
Crouse-Hinds MP	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	1469

Name / alias	Family	Mfr	Type	ID	Pg
Cutler-Hammer CDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	70
Cutler-Hammer CHP / CHB lighting panelboards	Cutler-Hammer CHP / CHB lighting panelboards	EAT	panelboard	FAM-EAT-039	113
Cutler-Hammer MP100 fusible distribution panelboard	Cutler-Hammer MP100 fusible distribution panelboard	EAT	panelboard	FAM-EAT-033	131
Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	EAT	switchboard	FAM-EAT-034	521
Cutler-Hammer MP40 distribution panelboard	Cutler-Hammer MP40 distribution panelboard	EAT	panelboard	FAM-EAT-032	138
Cutler-Hammer NFB panelboard	Cutler-Hammer NFB panelboard	EAT	panelboard	FAM-EAT-040	147
Cutler-Hammer Type EE plug-in power panelboard / switchboard	Cutler-Hammer Type EE plug-in power panelboard / switchboard	EAT	panelboard	FAM-EAT-037	113
Cutler-Hammer Type EP plug-in power panelboard	Cutler-Hammer Type EP plug-in power panelboard	EAT	panelboard	FAM-EAT-038	121
Cutler-Hammer Type ES switchboard	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-019	520
Cutler-Hammer Type PB lighting panelboard	Cutler-Hammer Type PB lighting panelboard	EAT	panelboard	FAM-EAT-035	148
Cutler-Hammer Type PH / PH-L panelboard	Cutler-Hammer Type PH / PH-L panelboard	EAT	panelboard	FAM-EAT-036	156
DB	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	1151
double slot	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	1871
Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	32
EE	Cutler-Hammer Type EE plug-in power panelboard / switchboard	EAT	panelboard	FAM-EAT-037	113
Electra-Center	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	1603
Electri-Center	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	1603
EP	Cutler-Hammer Type EP plug-in power panelboard	EAT	panelboard	FAM-EAT-038	121
ES	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-019	520
ES switchboard	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-019	520
F1	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	1516
F2	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	1561
FA	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	1890
FAM	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	1890
FC-1	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
FC-20	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
FC-I	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
FC-II	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708

Name / alias	Family	Mfr	Type	ID	Pg
FC20	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
FCI	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
FCII	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
FCRS	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
FDP	Westinghouse FDP fusible distribution panelboard	EAT	panelboard	FAM-EAT-014	122
FDP	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	1858
Federal Pacific QMQB	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	1858
Federal Pacific switchgear	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	1868
FPE BDP distribution panelboard (double-hole bus)	FPE BDP distribution panelboard (double-hole bus)	FPE	panelboard	FAM-FPE-002	1847
FPE CDP distribution panelboard (single-hole bus)	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	1852
FPE FDP fusible distribution panelboard / QMQB switchboard	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	1858
FPE NA1B / NH1B lighting and appliance panelboards	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1865
FPE NBLP / NQLP bolt-on lighting panelboards	FPE NBLP / NQLP bolt-on lighting panelboards	FPE	panelboard	FAM-FPE-006	1867
FPE NDP panelboard	FPE NDP panelboard	FPE	panelboard	FAM-FPE-004	1867
FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	1868
FPE-SWBD	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	1868
FPP (10in)	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	1516
FPP deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	1561
Frank Adam Electric panelboards	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	1890
Frank Adams	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	1890
Fusematic	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	1868
GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	1151
GE NLAB	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	1151
GE-Trumbull	Trumbull Electric (Plainville CT) panelboards and switches	GEA	panelboard	FAM-GEA-010	1371
HCB	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	1868
HCDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	70
HCJ	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
HCM	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
HCN	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703

Name / alias	Family	Mfr	Type	ID	Pg
HCP	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
HCP-SU	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
HCR-U	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
HCW	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
HCWM	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
HNDP	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
HR-7	ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	SIE	panelboard	FAM-SIE-013	1471
HWFB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	520
I Line	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
I-LINE	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
I-Line circuit breaker panelboard (Class 2110)	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
I-Line Combo (CP...)	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
IEM CDP	Industrial Electric Mfg (IEM) CDP-type distribution panelboards / switchboard distribution sections	OTH	panelboard	FAM-OTH-005	1891
IEM-CDP	Industrial Electric Mfg (IEM) CDP-type distribution panelboards / switchboard distribution sections	OTH	panelboard	FAM-OTH-005	1891
IFS	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-022	520
IFS switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-022	520
ILine	I-Line circuit breaker panelboard (Class 2110)	SQD	panelboard	FAM-SQD-006	703
Industrial Electric Mfg (IEM) CDP-type distribution panelboards / switchboard distribution sections	Industrial Electric Mfg (IEM) CDP-type distribution panelboards / switchboard distribution sections	OTH	panelboard	FAM-OTH-005	1891
Industrial Electric Mfg CDP	Industrial Electric Mfg (IEM) CDP-type distribution panelboards / switchboard distribution sections	OTH	panelboard	FAM-OTH-005	1891
Integrated Facility Switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-022	520
Integrated Facility System switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-022	520
ITE CDP	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	1469
ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	1469
ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	SIE	panelboard	FAM-SIE-013	1471
KINNEY	Kinney panelboards	OTH	panelboard	FAM-OTH-004	1893
Kinney panelboards	Kinney panelboards	OTH	panelboard	FAM-OTH-004	1893
KLAMPSWFUZ	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	1890
Legacy QMB distribution (pre-October-1984 QM and QW interiors)	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-010	978
Lincoln Flex Center retrofit	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	32
Magnatrip	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1876
MH Multibreaker	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-041	148
MH1B (OCR)	Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	SQD	panelboard	FAM-SQD-014	819
ML	Square D MLN panelboards and switchboards (ML breakers)	SQD	panelboard	FAM-SQD-013	781
ML-1	Square D MLN panelboards and switchboards (ML breakers)	SQD	panelboard	FAM-SQD-013	781

Name / alias	Family	Mfr	Type	ID	Pg
ML1	Square D MLN panelboards and switchboards (ML breakers)	SQD	panelboard	FAM-SQD-013	781
ML12	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1876
MLB20	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1876
MLN	Square D MLN panelboards and switchboards (ML breakers)	SQD	panelboard	FAM-SQD-013	781
MLW	Square D MLN panelboards and switchboards (ML breakers)	SQD	panelboard	FAM-SQD-013	781
MOB20	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1876
MP 40	Cutler-Hammer MP40 distribution panelboard	EAT	panelboard	FAM-EAT-032	138
MP-100	Cutler-Hammer MP100 fusible distribution panelboard	EAT	panelboard	FAM-EAT-033	131
MP-2	Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	EAT	switchboard	FAM-EAT-034	521
MP-200	Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	EAT	switchboard	FAM-EAT-034	521
MP-40	Cutler-Hammer MP40 distribution panelboard	EAT	panelboard	FAM-EAT-032	138
MP-HT	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	1469
MP100	Cutler-Hammer MP100 fusible distribution panelboard	EAT	panelboard	FAM-EAT-033	131
MP2	Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	EAT	switchboard	FAM-EAT-034	521
MP200	Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	EAT	switchboard	FAM-EAT-034	521
MP40	Cutler-Hammer MP40 distribution panelboard	EAT	panelboard	FAM-EAT-032	138
MP50 (dealer usage)	Cutler-Hammer MP40 distribution panelboard	EAT	panelboard	FAM-EAT-032	138
MT12MBB	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1876
MTMB20	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1876
MURRAY	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	1469
Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	1469
Murray MP	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	1469
NA	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	1150
NA-1B	Square D NA1B panelboard (E-frame bolted, AC/DC)	SQD	panelboard	FAM-SQD-012	787
NA-type panel	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1865
NA1B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
NA1B	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1865
NA1B	Square D NA1B panelboard (E-frame bolted, AC/DC)	SQD	panelboard	FAM-SQD-012	787
NA1B-LX	Square D NA1B panelboard (E-frame bolted, AC/DC)	SQD	panelboard	FAM-SQD-012	787
NAB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
NAB	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1865
NAB	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	1150

Name / alias	Family	Mfr	Type	ID	Pg
NAB / NHB bolt-on panelboards (legacy)	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	1150
NAIB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
NAIB	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1865
NAIB	Square D NA1B panelboard (E-frame bolted, AC/DC)	SQD	panelboard	FAM-SQD-012	787
NB panelboard	FPE NBLP / NQLP bolt-on lighting panelboards	FPE	panelboard	FAM-FPE-006	1867
NBLP	FPE NBLP / NQLP bolt-on lighting panelboards	FPE	panelboard	FAM-FPE-006	1867
NCB	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	1110
NDP	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
NDP	FPE NDP panelboard	FPE	panelboard	FAM-FPE-004	1867
NEB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
NEHB	NEHB panelboard	SQD	panelboard	FAM-SQD-005	787
NEHB lighting panelboard	NEHB panelboard	SQD	panelboard	FAM-SQD-005	787
NEHB panelboard	NEHB panelboard	SQD	panelboard	FAM-SQD-005	787
New Revised P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1610
NextGen P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1610
NF	NF panelboard (Class 1670)	SQD	panelboard	FAM-SQD-004	789
NF panelboard (Class 1670)	NF panelboard (Class 1670)	SQD	panelboard	FAM-SQD-004	789
NF Series 0	NF panelboard (Class 1670)	SQD	panelboard	FAM-SQD-004	789
NF Series E1	NF panelboard (Class 1670)	SQD	panelboard	FAM-SQD-004	789
NFB	Cutler-Hammer NFB panelboard	EAT	panelboard	FAM-EAT-040	147
NFOM	NF panelboard (Class 1670)	SQD	panelboard	FAM-SQD-004	789
NH-type panel	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1865
NH1B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
NH1B	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1865
NH1B	Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	SQD	panelboard	FAM-SQD-014	819
NH1B-LX	Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	SQD	panelboard	FAM-SQD-014	819
NHB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
NHB	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1865
NHB	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	1150
NHB	ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	SIE	panelboard	FAM-SIE-013	1471
NHDP	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
NHDP	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	1852
NHDP (related?)	FPE NDP panelboard	FPE	panelboard	FAM-FPE-004	1867
NHEB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
NHIB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
NHIB	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1865
NHIB	Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	SQD	panelboard	FAM-SQD-014	819
NLAB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	147

Name / alias	Family	Mfr	Type	ID	Pg
NLAB	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	1151
NLAB	ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	SIE	panelboard	FAM-SIE-013	1471
NLAB single row	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	147
NLAB-AB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	147
NLAB-ABH	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	147
NLAB-LX	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	147
NLAB-LXX	ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	SIE	panelboard	FAM-SIE-013	1471
NLAB?	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	1150
NLABLX	ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	SIE	panelboard	FAM-SIE-013	1471
NLTQ	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	1151
NLTQX	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	1151
NM/NMM	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-041	148
NM1B	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-041	148
NMIB	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-041	148
NMM	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-041	148
NOFUZE panelboard	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-041	148
NPLAB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	147
NQ	NQ panelboard (Class 1640)	SQD	panelboard	FAM-SQD-001	819
NQ lighting panelboard	NQ panelboard (Class 1640)	SQD	panelboard	FAM-SQD-001	819
NQ panelboard (Class 1640)	NQ panelboard (Class 1640)	SQD	panelboard	FAM-SQD-001	819
NQ RTI	NQ panelboard (Class 1640)	SQD	panelboard	FAM-SQD-001	819
NQ/NF retrofit form	Square D NQ / NF retrofit (custom trim + current interior into existing enclosure)	SQD	other	FAM-SQD-015	703
NQ0	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	898
NQ14 (14-inch-wide)	NQ panelboard (Class 1640)	SQD	panelboard	FAM-SQD-001	819
NQB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	147
NQC	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	147
NQH	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	898
NQHB	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	898
NQLP	FPE NBLP / NQLP bolt-on lighting panelboards	FPE	panelboard	FAM-FPE-006	1867
NQO	NQO / NQOB panelboard	SQD	panelboard	FAM-SQD-003	890
NQO	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	898
NQO / NQOB panelboard	NQO / NQOB panelboard	SQD	panelboard	FAM-SQD-003	890
NQO-LX	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	898
NQOB	NQO / NQOB panelboard	SQD	panelboard	FAM-SQD-003	890
NQOB	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	898
NQOB column	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	898

Name / alias	Family	Mfr	Type	ID	Pg
NQOB-LX	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	898
NQOD	NQOD panelboard (Class 1630)	SQD	panelboard	FAM-SQD-002	904
NQOD lighting panelboard	NQOD panelboard (Class 1630)	SQD	panelboard	FAM-SQD-002	904
NQOD panelboard (Class 1630)	NQOD panelboard (Class 1630)	SQD	panelboard	FAM-SQD-002	904
NQP	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	147
NTFB (basic NQOB bus)	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	898
NTQ	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	1151
NY1B	NEHB panelboard	SQD	panelboard	FAM-SQD-005	787
NYIB	NEHB panelboard	SQD	panelboard	FAM-SQD-005	787
old style QMB	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-010	978
Original P1	Type P1 (original)	SIE	panelboard	FAM-SIE-002	1472
P1	Type P1 (original)	SIE	panelboard	FAM-SIE-002	1472
P1 (pre-2014/2015)	Type P1 (original)	SIE	panelboard	FAM-SIE-002	1472
P1...N	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1610
P1...T	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1610
P1R	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
P1RB	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
P1RL	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
P2	Type P2 panelboard	SIE	panelboard	FAM-SIE-005	1482
P2R	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
P2RB	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
P2RL	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
P3	Type P3 panelboard	SIE	panelboard	FAM-SIE-006	1507
P4	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	1516
P5	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	1561
PB	Cutler-Hammer Type PB lighting panelboard	EAT	panelboard	FAM-EAT-035	148
PH	Cutler-Hammer Type PH / PH-L panelboard	EAT	panelboard	FAM-EAT-036	156
PH-L	Cutler-Hammer Type PH / PH-L panelboard	EAT	panelboard	FAM-EAT-036	156
PM4a	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	106
PM4b	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	106
Pow-R-Command	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-016	165
Pow-R-Command lighting control panelboard	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-016	165
POW-R-LINE	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	171
Pow-R-Line 1	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	171
POW-R-LINE 1A	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	178
Pow-R-Line 1a	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	178
Pow-R-Line 1R	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
Pow-R-Line 1X	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	301

Name / alias	Family	Mfr	Type	ID	Pg
Pow-R-Line 2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	171
Pow-R-Line 2a	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-002	318
Pow-R-Line 2R	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
Pow-R-Line 2X	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-007	319
Pow-R-Line 3	Westinghouse Pow-R-Line 3 (vintage)	EAT	panelboard	FAM-EAT-012	320
Pow-R-Line 3a	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-003	322
Pow-R-Line 3E	Pow-R-Line 3E	EAT	panelboard	FAM-EAT-004	390
Pow-R-Line 3FQS	Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	EAT	panelboard	FAM-EAT-031	390
Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	EAT	panelboard	FAM-EAT-031	390
Pow-R-Line 3X	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-008	418
Pow-R-Line 4	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	420
Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	420
Pow-R-Line 4B	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	420
Pow-R-Line 4D	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	420
Pow-R-Line 4F	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	420
Pow-R-Line 4X	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	505
Pow-R-Line 5P	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-015	506
Pow-R-Line 5P plug-on distribution panelboard	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-015	506
Pow-R-Line C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	521
POW-R-LINE C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	521
Pow-R-Line C switchboard	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	521
Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	165
Pow-R-Line CS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-021	522
Pow-R-Line CS switchboard	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-021	522
Pow-R-Line I	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	523
Pow-R-Line i	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	523
Pow-R-Line i switchboard	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	523
Pow-R-Line Retrofit	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
Pow-R-Line XD	Pow-R-Line XD switchboard	EAT	switchboard	FAM-EAT-029	523
Pow-R-Line XD switchboard	Pow-R-Line XD switchboard	EAT	switchboard	FAM-EAT-029	523
Pow-R-Line Xpert	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	301
Pow-R-Line Xpert 1X	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	301
Pow-R-Line Xpert 2X	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-007	319
Pow-R-Line Xpert 3X	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-008	418
Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	505
Pow-R-Xpress PRL4X	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	505
Power-Style QED-2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-008	994

Name / alias	Family	Mfr	Type	ID	Pg
Power-Style QED-2 Switchboard	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-008	994
PRC	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-016	165
PRCE	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-016	165
PRL CS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-021	522
PRL i	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	523
PRL XD	Pow-R-Line XD switchboard	EAT	switchboard	FAM-EAT-029	523
PRL-1A	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	178
PRL-2A	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-002	318
PRL-3A	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-003	322
PRL-4	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	420
PRL-C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	521
PRL-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	165
PRL-RETRO	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
PRL1	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	171
PRL1-LX	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	171
PRL1/PRL2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	171
PRL1A	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	178
PRL1a	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	178
PRL1a-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	165
PRL1R	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
PRL1x	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	301
PRL1X	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	301
PRL1X-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	165
PRL2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	171
PRL2a	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-002	318
PRL2A	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-002	318
PRL2a-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	165
PRL2R	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-030	170
PRL2X	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-007	319
PRL2x	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-007	319
PRL2X-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	165
PRL3	Westinghouse Pow-R-Line 3 (vintage)	EAT	panelboard	FAM-EAT-012	320
PRL3-LX	Westinghouse Pow-R-Line 3 (vintage)	EAT	panelboard	FAM-EAT-012	320
PRL3A	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-003	322
PRL3a	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-003	322
PRL3E	Pow-R-Line 3E	EAT	panelboard	FAM-EAT-004	390
PRL3e	Pow-R-Line 3E	EAT	panelboard	FAM-EAT-004	390
PRL3FQS	Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	EAT	panelboard	FAM-EAT-031	390
PRL3x	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-008	418
PRL3X	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-008	418

Name / alias	Family	Mfr	Type	ID	Pg
PRL4	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	420
PRL4B	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	420
PRL4D	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	420
PRL4DX	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	505
PRL4F	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	420
PRL4X	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	420
PRL4X	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	505
PRL4x	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	505
PRL5P	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-015	506
PRLC	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	521
PRLCS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-021	522
PRLi	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	523
PRLXD	Pow-R-Line XD switchboard	EAT	switchboard	FAM-EAT-029	523
Pro-Stock	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	1054
PULFUZSW	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	1890
Pushmatic	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	1603
PUSHMATIC	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	1603
Q-frame	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1876
QED 2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-008	994
QED-2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-008	994
QED-2 Series 2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-008	994
QED-2/S	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-008	994
QED2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-008	994
QM	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-010	978
QM interior	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-010	978
QMB	QMB fusible panelboard (Class 4620)	SQD	panelboard	FAM-SQD-007	923
QMB fusible	QMB fusible panelboard (Class 4620)	SQD	panelboard	FAM-SQD-007	923
QMB fusible panelboard (Class 4620)	QMB fusible panelboard (Class 4620)	SQD	panelboard	FAM-SQD-007	923
QMB Saflex	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-010	978
QMB Series 1-4	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-010	978
QMB switchboard	QMB fusible panelboard (Class 4620)	SQD	panelboard	FAM-SQD-007	923
QMB-LEGACY	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-010	978
QMB-QMJ	QMB fusible panelboard (Class 4620)	SQD	panelboard	FAM-SQD-007	923
QMQB panelboard	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	1858
QMQB switchboard	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	1858
QMR	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	1110
QSCP	Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	EAT	panelboard	FAM-EAT-031	390

Name / alias	Family	Mfr	Type	ID	Pg
QSF panelboard	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	1871
Quik-Spec Coordination Panelboard	Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	EAT	panelboard	FAM-EAT-031	390
QW	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-010	978
QW interior	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-010	978
RA/RB/RC/RD/RE/RAA retrofit kits	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	32
ReliaGear lighting panelboard	ReliaGear lighting panelboards (Types RQ, RE, RL, RS, RD; AD interiors)	GEA	panelboard	FAM-GEA-015	1158
ReliaGear lighting panelboards (Types RQ, RE, RL, RS, RD; AD interiors)	ReliaGear lighting panelboards (Types RQ, RE, RL, RS, RD; AD interiors)	GEA	panelboard	FAM-GEA-015	1158
ReliaGear LP	ReliaGear lighting panelboards (Types RQ, RE, RL, RS, RD; AD interiors)	GEA	panelboard	FAM-GEA-015	1158
ReliaGear neXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	1161
ReliaGear neXT Power Panelboards	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	1161
ReliaGear OEM neXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	1161
ReliaGear RD	ReliaGear lighting panelboards (Types RQ, RE, RL, RS, RD; AD interiors)	GEA	panelboard	FAM-GEA-015	1158
ReliaGear RE	ReliaGear lighting panelboards (Types RQ, RE, RL, RS, RD; AD interiors)	GEA	panelboard	FAM-GEA-015	1158
ReliaGear RL	ReliaGear lighting panelboards (Types RQ, RE, RL, RS, RD; AD interiors)	GEA	panelboard	FAM-GEA-015	1158
ReliaGear RQ	ReliaGear lighting panelboards (Types RQ, RE, RL, RS, RD; AD interiors)	GEA	panelboard	FAM-GEA-015	1158
ReliaGear SB	ReliaGear SB low voltage switchboards	GEA	switchboard	FAM-GEA-014	1373
ReliaGear SB low voltage switchboards	ReliaGear SB low voltage switchboards	GEA	switchboard	FAM-GEA-014	1373
Retro Size A-E	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	32
Revised P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1610
RG-LIGHTING	ReliaGear lighting panelboards (Types RQ, RE, RL, RS, RD; AD interiors)	GEA	panelboard	FAM-GEA-015	1158
RG-NEXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	1161
RG-SB	ReliaGear SB low voltage switchboards	GEA	switchboard	FAM-GEA-014	1373
RGSB	ReliaGear SB low voltage switchboards	GEA	switchboard	FAM-GEA-014	1373
RP1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1610
RTI 14in NQ interior	Square D NQ / NF retrofit (custom trim + current interior into existing enclosure)	SQD	other	FAM-SQD-015	703
S1	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	1705
S1/S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	1705
S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	1705
S4	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	1516
S5	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	1561
Safe-Converti-Fuse	Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	GEA	panelboard	FAM-GEA-012	1149
Saflex	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-010	978
Saflex panelboard	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-010	978
SB	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	1720

Name / alias	Family	Mfr	Type	ID	Pg
SB1	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	1720
SB2	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	1720
SB3	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	1720
SB4 (blank plates only)	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	1720
SBP	Super Blue Pennant / Blue Pennant stock service entrance switchboards	SIE	switchboard	FAM-SIE-015	1738
SCP	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	1163
SCP+	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	1163
SCP-PLUS	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	1163
SE	Type SE panelboard	SIE	panelboard	FAM-SIE-004	1708
SE panels	Type SE panelboard	SIE	panelboard	FAM-SIE-004	1708
Sentron Deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	1561
Sentron S1	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	1705
Sentron S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	1705
Sentron SPP shallow	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	1516
Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
single slot split buss	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	1871
Spectra	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	1184
Spectra Bolt-On (SBO)	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	1184
Spectra Plug-In	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	1184
Spectra Series	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	1184
Spectra Series Plug-in Switchboards	Spectra Series Switchboards (group-mounted Class 1; plug-in Spectra distribution panels)	GEA	switchboard	FAM-GEA-013	1374
Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	1184
Spectra Series Switchboard	Spectra Series Switchboards (group-mounted Class 1; plug-in Spectra distribution panels)	GEA	switchboard	FAM-GEA-013	1374
Spectra Series Switchboards (group-mounted Class 1; plug-in Spectra distribution panels)	Spectra Series Switchboards (group-mounted Class 1; plug-in Spectra distribution panels)	GEA	switchboard	FAM-GEA-013	1374
Spectra Series Type SCP Plus panelboards	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	1163
Spectra switchboard	Spectra Series Switchboards (group-mounted Class 1; plug-in Spectra distribution panels)	GEA	switchboard	FAM-GEA-013	1374
SPECTRA-PP	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	1184
SPECTRA-SB	Spectra Series Switchboards (group-mounted Class 1; plug-in Spectra distribution panels)	GEA	switchboard	FAM-GEA-013	1374
SpectraRMS	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	1184
Speed D	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-009	1000
SPEED-D	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-009	1000
Speed-D Merchandised Service Section Switchboard	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-009	1000

Name / alias	Family	Mfr	Type	ID	Pg
SpeedD	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-009	1000
SPP	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	1516
SPP deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	1561
SPP6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
SQD-NQNF-RETRO	Square D NQ / NF retrofit (custom trim + current interior into existing enclosure)	SQD	other	FAM-SQD-015	703
Square D MLN panelboards and switchboards (ML breakers)	Square D MLN panelboards and switchboards (ML breakers)	SQD	panelboard	FAM-SQD-013	781
Square D NA1B panelboard (E-frame bolted, AC/DC)	Square D NA1B panelboard (E-frame bolted, AC/DC)	SQD	panelboard	FAM-SQD-012	787
Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	SQD	panelboard	FAM-SQD-014	819
Square D NQ / NF retrofit (custom trim + current interior into existing enclosure)	Square D NQ / NF retrofit (custom trim + current interior into existing enclosure)	SQD	other	FAM-SQD-015	703
Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	898
Square D Retrofit offering	Square D NQ / NF retrofit (custom trim + current interior into existing enclosure)	SQD	other	FAM-SQD-015	703
Super Blue Pennant / Blue Pennant stock service entrance switchboards	Super Blue Pennant / Blue Pennant stock service entrance switchboards	SIE	switchboard	FAM-SIE-015	1738
Swing-WA	Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	GEA	panelboard	FAM-GEA-012	1149
Swing-Wa	Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	GEA	panelboard	FAM-GEA-012	1149
SWPS Pro-Stock	Spectra Series Switchboards (group-mounted Class 1; plug-in Spectra distribution panels)	GEA	switchboard	FAM-GEA-013	1374
Sylvania S-line panelboard	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	1871
TQLA	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	1151
TQLP	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	1151
Trumbell (misspelling)	Trumbull Electric (Plainville CT) panelboards and switches	GEA	panelboard	FAM-GEA-010	1371
TRUMBULL	Trumbull Electric (Plainville CT) panelboards and switches	GEA	panelboard	FAM-GEA-010	1371
Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	GEA	panelboard	FAM-GEA-012	1149
Trumbull Electric (Plainville CT) panelboards and switches	Trumbull Electric (Plainville CT) panelboards and switches	GEA	panelboard	FAM-GEA-010	1371
Type 1 Pow-R-Line C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	521
Type BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	22
Type BR loadcenter	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	22
Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	1110

Name / alias	Family	Mfr	Type	ID	Pg
Type EE	Cutler-Hammer Type EE plug-in power panelboard / switchboard	EAT	panelboard	FAM-EAT-037	113
Type EP	Cutler-Hammer Type EP plug-in power panelboard	EAT	panelboard	FAM-EAT-038	121
Type ES	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-019	520
Type NFB	Cutler-Hammer NFB panelboard	EAT	panelboard	FAM-EAT-040	147
Type P1 (original)	Type P1 (original)	SIE	panelboard	FAM-SIE-002	1472
Type P1 (Revised P1)	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1610
Type P2 panelboard	Type P2 panelboard	SIE	panelboard	FAM-SIE-005	1482
Type P3 panelboard	Type P3 panelboard	SIE	panelboard	FAM-SIE-006	1507
Type P4 / S4 / Sentron SPP (10in deep) power panelboard	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	1516
Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	1561
Type PB	Cutler-Hammer Type PB lighting panelboard	EAT	panelboard	FAM-EAT-035	148
Type PH	Cutler-Hammer Type PH / PH-L panelboard	EAT	panelboard	FAM-EAT-036	156
Type S1 / S2 lighting panelboards	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	1705
Type SB1 / SB2 / SB3 distribution switchboards	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	1720
Type SE panelboard	Type SE panelboard	SIE	panelboard	FAM-SIE-004	1708
Type WF	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	523
Type WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	523
VB	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
VB-5	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
VB-6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1708
VCB	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	1868
Waddsworth	Wadsworth panelboards and breakers	OTH	panelboard	FAM-OTH-002	1893
WADSWORTH	Wadsworth panelboards and breakers	OTH	panelboard	FAM-OTH-002	1893
Wadsworth panelboards and breakers	Wadsworth panelboards and breakers	OTH	panelboard	FAM-OTH-002	1893
WCA	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	520
WEB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	520
WEHB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	520
Westinghouse CDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	70
Westinghouse CDP / HCDP distribution panelboard	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	70
Westinghouse FDP	Westinghouse FDP fusible distribution panelboard	EAT	panelboard	FAM-EAT-014	122
Westinghouse FDP fusible distribution panelboard	Westinghouse FDP fusible distribution panelboard	EAT	panelboard	FAM-EAT-014	122
Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	147
Westinghouse NLAB lighting panelboard	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	147
Westinghouse NM / NMM / NMIB Multibreaker panelboards	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-041	148

Name / alias	Family	Mfr	Type	ID	Pg
Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	171
Westinghouse Pow-R-Line 3 (vintage)	Westinghouse Pow-R-Line 3 (vintage)	EAT	panelboard	FAM-EAT-012	320
Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	520
Westinghouse WF/WRP switchboard	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	523
WF	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	523
WF/WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	523
WF/WRP switchboard	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	523
WFB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	520
WGB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	520
WGHB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	520
WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	523
ZIN-DIST	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	1871
ZIN-Q	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1876
Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	1871
Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1876

12.3 Part-number index (primary and alternate numbers)

Sorted by normalised number (punctuation and spaces removed). Search a partial number by its leading characters.

Number	Type	Mfr	Description	Catalogue ID	Pg
0080429	alias	EAT	T-handle lock	EDH-EAT-00408	273
0080429	primary	EAT	Panelboard trim lock — T-handle lock	EDH-EAT-00445	94
10083041P1	primary	GEA	GE Terminal cover, G-frame bolt-on (main/single-branch) - 10083041P1	EDH-GEA-00411	1287
10083889P19	primary	GEA	Spectra circuit breaker cover 10083889P19 for Record Plus FE frame (4 1/8 in hig	EDH-GEA-00813	1288
10083889P20	primary	GEA	Spectra circuit breaker cover 10083889P20 for Record Plus FE frame (4 1/8 in hig	EDH-GEA-00814	1289
10083889P21	primary	GEA	Spectra circuit breaker cover 10083889P21 for Record Plus FE frame (4 1/8 in hig	EDH-GEA-00815	1289
10083889P28	primary	GEA	Spectra circuit breaker cover 10083889P28 for Record Plus FE frame (5 1/2 in hig	EDH-GEA-00816	1289
10083889P29	primary	GEA	Spectra circuit breaker cover 10083889P29 for Record Plus FE frame (5 1/2 in hig	EDH-GEA-00817	1290
10083889P30	primary	GEA	Spectra circuit breaker cover 10083889P30 for Record Plus FE frame (5 1/2 in hig	EDH-GEA-00818	1290
10085396G1	primary	GEA	Spectra ADF dead-front hardware kit 10085396G1	EDH-GEA-00545	1337
10096990P1	primary	GEA	Spectra space filler 10096990P1 for FE breaker cover	EDH-GEA-00819	1293
113A5356P1	primary	GEA	GE circuit numbering tabs, circuits 1-24	EDH-GEA-00581	1156
113A5357P1	primary	GEA	GE circuit numbering tabs, circuits 1-42	EDH-GEA-00582	1156
114B361H01	primary	EAT	Eaton Directory card	EDH-EAT-01260	300
114C247G01	primary	EAT	Vintage lighting/small power panel trim lock	EDH-EAT-00411	176
11-5068-05	alias	SIE	6CLE2 connecting strap kit - CED (3.75in, twin)	EDH-SIE-00155	1563

Number	Type	Mfr	Description	Catalogue ID	Pg
11-5570-01	primary	SIE	Series 5 adaptor kit (adapts Series 6 mounting kits to Series 5 / CDP-5 / VB-5 /	EDH-SIE-00354	1719
11-5570-02	primary	SIE	Series 5 adaptor kit (12 sets) for JD twin mounting kits	EDH-SIE-00355	1720
11-D-4554-01	alias	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	1672
11-D-4560-01	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	1671
12-1800-01	alias	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	1672
12-1800-01	alias	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	1482
121B7147P1	primary	GEA	GE main lug 250-600 MCM, 400 A (1 per phase) / 600 A (2 per phase), NLAB/NLTQ/DB	EDH-GEA-00580	1152
1223C77G03	primary	EAT	Eaton padlockable handle device, G-frame GD/GHC/GHB (pkg 10)	EDH-EAT-01269	298
1223C77G05	primary	EAT	Eaton padlockable handle device, G-frame GD/GHC/GHB (pkg 10)	EDH-EAT-01270	298
1223C77G06	primary	EAT	Eaton padlockable handle device, G-frame GD/GHC/GHB (pkg 100)	EDH-EAT-01271	299
1253C72G01	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 50 A	EDH-EAT-00683	533
1253C72G03	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 50 A	EDH-EAT-00684	533
1253C73G01	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 150 A	EDH-EAT-00687	533
1253C73G03	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 100 A	EDH-EAT-00685	534
1253C73G05	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 150 A	EDH-EAT-00688	534
1253C73G06	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 100 A	EDH-EAT-00686	535
1256C42G01	primary	EAT	BAB 2- and 3-pole lock-off	EDH-EAT-00422	296
1256C42G02	primary	EAT	BAB 1-pole lock-off	EDH-EAT-00421	296
12-5719-01	alias	SIE	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	EDH-SIE-00194	1722
12-5720-01	alias	SIE	6CLL1 connecting strap kit - CLD6 (8.75in, single)	EDH-SIE-00198	1724
12-5771-01	alias	SIE	6SCJ1 connecting strap kit - SCJD6 (8.75in, single)	EDH-SIE-00196	1726
12-5772-01	alias	SIE	6SCL1 connecting strap kit - SCLD6 (8.75in, single)	EDH-SIE-00200	1727
1266C07G01	primary	EAT	Series C J-frame terminal shield 2/3-pole, line end	EDH-EAT-00635	564
1294C01H01	primary	EAT	Eaton lock dog (non-padlockable), G-frame GD/GHC/GHB/GMCP	EDH-EAT-01268	297
12-A-1801-01	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	1671
12-A-1802-01	supersedes	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	1678
12-A-1802-01	alias	SIE	P1 main filler for 100-125A frames ED	EDH-SIE-00069	1673
12-A-1803-01	alias	SIE	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels	EDH-SIE-00070	1674
12-A-1804-01	alias	SIE	QJ main filler plate	EDH-SIE-00073	1676
12-A-1804-02	alias	SIE	QJ main filler plate	EDH-SIE-00074	1677
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)	EDH-EAT-00250	246
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)	EDH-EAT-00251	246
12CLN500	primary	SIE	VL NG compression lug kit 500 kcmil (12 lugs)	EDH-SIE-00632	1808
139C5362P2	primary	GEA	Deadfront filler plate (shield insert) - QB (A-Series II power panel)	EDH-GEA-00035	1107
139C5491G1	primary	GEA	GE metal directory card holder	EDH-GEA-00687	1092
139C5491P4	primary	GEA	GE directory card holder	EDH-GEA-00688	1092
139C5500P81	primary	GEA	3P breaker support bracket (ASPP6QD6D)	EDH-GEA-00022	1105

Number	Type	Mfr	Description	Catalogue ID	Pg
139C5500P82	primary	GEA	3P breaker support bracket (ASPP6SE6D)	EDH-GEA-00023	1106
139C5500P83	primary	GEA	3P breaker support bracket (ASPP6SG3S)	EDH-GEA-00024	1106
139C5500P84	primary	GEA	3P breaker support bracket (ASPP6SF3S)	EDH-GEA-00025	1106
139C5503P103	primary	GEA	Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)	EDH-GEA-00033	1108
139C5503P129	primary	GEA	Deadfront filler plate (shield insert) - TEY (A-Series II power panel)	EDH-GEA-00034	1108
139C5503P64	primary	GEA	Deadfront filler plate (shield insert) - TQD (A-Series II power panel)	EDH-GEA-00030	1108
139C5503P77	primary	GEA	Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)	EDH-GEA-00031	1109
139C5503P90	primary	GEA	Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)	EDH-GEA-00032	1109
139C5612P2	primary	GEA	GE A-Series column panelboard directory card	EDH-GEA-00695	1095
139C5612P3	primary	GEA	GE A-Series directory card	EDH-GEA-00680	1093
139C5700G11	primary	GEA	GE front extension mounting kit	EDH-GEA-00693	1070
139C5700G6	primary	GEA	GE front hinge-to-box mounting kit	EDH-GEA-00692	1071
139C5700P86	primary	GEA	3P breaker support bracket (ASPP6FB6D)	EDH-GEA-00026	1106
139C5702AQDG1	primary	GEA	Branch base, A phase, TQD (A-Series II)	EDH-GEA-00010	1101
139C5702ASEG1	primary	GEA	Branch base, A phase, SE/TED/FB (A-Series II)	EDH-GEA-00011	1102
139C5702ASFG1	primary	GEA	Branch base, A phase, SF (A-Series II)	EDH-GEA-00012	1102
139C5702BQDG1	primary	GEA	Branch base, B phase, TQD (A-Series II)	EDH-GEA-00013	1102
139C5702BSEG1	primary	GEA	Branch base, B phase, SE/TED/FB (A-Series II)	EDH-GEA-00014	1102
139C5702BSFG1	primary	GEA	Branch base, B phase, SF (A-Series II)	EDH-GEA-00015	1103
139C5702CQDG1	primary	GEA	Branch base, C phase, TQD (A-Series II)	EDH-GEA-00016	1103
139C5702CSEG1	primary	GEA	Branch base, C phase, SE/TED/FB (A-Series II)	EDH-GEA-00017	1103
139C5702CSFG1	primary	GEA	Branch base, C phase, SF (A-Series II)	EDH-GEA-00018	1103
139C5720G3	primary	GEA	A-Series AE front mounting kit	EDH-GEA-00090	1071
139C5720G6	primary	GEA	A-Series AQ/AL front mounting kit	EDH-GEA-00091	1071
139C5720G9	primary	GEA	A-Series AD front mounting kit	EDH-GEA-00092	1071
168D1930P3	primary	GEA	GE Filler, TEDL double-branch 3X, for 36/40 in wide - 168D1930P3	EDH-GEA-00434	1294
168D1930P4	primary	GEA	GE Filler, TEDL double-branch 3X, for 44/45 in wide - 168D1930P4	EDH-GEA-00435	1294
192A6976P189	primary	GEA	GE Thread-forming screw #10-32 x 7/16 in - 192A6976P189	EDH-GEA-00412	1344
1A32258H03	primary	EAT	Standard trim lock for PRL4X and PRL4 lighting and power panels	EDH-EAT-00404	481
1A84774H01	primary	EAT	Eaton PRLC switchboard cover screws (1/4-20 x 1.50)	EDH-EAT-01264	522
1A85194G01	primary	EAT	EZ Trim lock keyed WEM-2	EDH-EAT-00410	252
1A85195H01	primary	EAT	Eaton EZ Trim anti-lift slide bracket	EDH-EAT-01266	287
1C96608	primary	EAT	PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00163	235
1C96608G01..G63 (odd item numbers)	style_number	EAT	PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00163	235
1C96609	primary	EAT	PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)	EDH-EAT-00165	319
1C96609G01..G63 (same G scheme as 1C96608)	style_number	EAT	PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)	EDH-EAT-00165	319
1C96619	primary	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)	EDH-EAT-00250	246
1C96620	primary	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)	EDH-EAT-00251	246
1C96638	primary	EAT	PRL1a/2a/1X/2X deadfront cover assembly	EDH-EAT-00241	246
1C96645	primary	EAT	PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 i	EDH-EAT-00233	237
1C96646	primary	EAT	PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (3	EDH-EAT-00221	237

Number	Type	Mfr	Description	Catalogue ID	Pg
1C96647	supersedes	EAT	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	EDH-EAT-00222	240
1C96647	primary	EAT	PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 d	EDH-EAT-00223	237
1C96648	primary	EAT	PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical	EDH-EAT-00224	238
1C96649	primary	EAT	PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% ne	EDH-EAT-00225	238
1C96650	supersedes	EAT	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00226	241
1C96650	primary	EAT	PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00227	238
1C96651	primary	EAT	PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mech	EDH-EAT-00228	239
1C96652	primary	EAT	PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral	EDH-EAT-00229	239
1C96653	supersedes	EAT	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A	EDH-EAT-00230	241
1C96653	primary	EAT	PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing	EDH-EAT-00231	239
1C96654	primary	EAT	PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mech	EDH-EAT-00232	240
1C97022	primary	EAT	PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 i	EDH-EAT-00234	240
1LOK	primary	FPE	FPE handle lock for 1-pole NA/NB breakers	EDH-FPE-00041	1867
1X H01; 2X H02; 3X H03; 4X H13; 5X H14; 6X H04; 7X H05; 9X H06; 10X H07; 11X H08; 12X H09; 13X H10; 15X H11; 20X H12	style_number	EAT	PRL4/PRL4X blank cover for 24 in wide box (1X-20X)	EDH-EAT-00294	472
208B264H01	primary	EAT	Series C K-frame panelboard strap mounting bracket	EDH-EAT-00703	596
208B297H01	primary	EAT	Series C L-frame panelboard strap mounting bracket	EDH-EAT-00704	622
208B966G01	primary	EAT	Series C M-frame terminal shield	EDH-EAT-00643	639
208C1850P3	primary	GEA	Spectra breaker cover support 208C1850P3	EDH-GEA-00440	1285
208C1850P4	primary	GEA	Spectra breaker cover support 208C1850P4	EDH-GEA-00441	1286
208C1850P5	primary	GEA	Spectra breaker cover support 208C1850P5	EDH-GEA-00442	1286
208C1850P6	primary	GEA	Spectra breaker cover support 208C1850P6	EDH-GEA-00443	1286
208C2022P1	primary	GEA	Spectra ADF dead-front mounting post 208C2022P1	EDH-GEA-00544	1287
208C2291P1	primary	GEA	GE Filler center, G-frame double-branch bolt-on - 208C2291P1	EDH-GEA-00423	1294
208C4262G1	primary	GEA	Spectra breaker cover 208C4262G1 (TFJ..., single-branch, (3X))	EDH-GEA-00465	1294
208C4262G10	primary	GEA	Spectra breaker cover 208C4262G10 (THQB..., double-branch, (4X))	EDH-GEA-00476	1295
208C4262G11	primary	GEA	Spectra breaker cover 208C4262G11 (THQB..., double-branch, (4X))	EDH-GEA-00477	1295
208C4262G12	primary	GEA	Spectra breaker cover 208C4262G12 (THQB..., double-branch, (4X))	EDH-GEA-00478	1295
208C4262G13	primary	GEA	Spectra breaker cover 208C4262G13 (TEY, double-branch, (4X))	EDH-GEA-00479	1296
208C4262G14	primary	GEA	Spectra breaker cover 208C4262G14 (TEY, double-branch, (4X))	EDH-GEA-00480	1296
208C4262G15	primary	GEA	Spectra breaker cover 208C4262G15 (TEY, double-branch, (4X))	EDH-GEA-00481	1296
208C4262G16	primary	GEA	Spectra breaker cover 208C4262G16 (SGDA..., single-branch, (4X))	EDH-GEA-00482	1297
208C4262G17	primary	GEA	Spectra breaker cover 208C4262G17 (SGDA..., single-branch, (4X))	EDH-GEA-00483	1297
208C4262G18	primary	GEA	Spectra breaker cover 208C4262G18 (SGDA..., single-branch, (4X))	EDH-GEA-00484	1298

Number	Type	Mfr	Description	Catalogue ID	Pg
208C4262G19	primary	GEA	Spectra breaker cover 208C4262G19 (SGDA..., double-branch, (4X))	EDH-GEA-00486	1298
208C4262G2	primary	GEA	Spectra breaker cover 208C4262G2 (TFJ..., single-branch, (3X))	EDH-GEA-00466	1299
208C4262G20	primary	GEA	Spectra breaker cover 208C4262G20 (TQD..., double-branch, (2X))	EDH-GEA-00470	1299
208C4262G21	primary	GEA	Spectra breaker cover 208C4262G21 (TQD..., double-branch, (2X))	EDH-GEA-00471	1300
208C4262G22	primary	GEA	Spectra breaker cover 208C4262G22 (TQD..., double-branch, (2X))	EDH-GEA-00472	1300
208C4262G23	primary	GEA	Spectra breaker cover 208C4262G23 (TQD..., double-branch, (3X))	EDH-GEA-00473	1301
208C4262G24	primary	GEA	Spectra breaker cover 208C4262G24 (TQD..., double-branch, (3X))	EDH-GEA-00474	1301
208C4262G25	primary	GEA	Spectra breaker cover 208C4262G25 (TQD..., double-branch, (3X))	EDH-GEA-00475	1302
208C4262G26	primary	GEA	Spectra breaker cover 208C4262G26 (TEB..., double-branch, (2X))	EDH-GEA-00459	1302
208C4262G27	primary	GEA	Spectra breaker cover 208C4262G27 (TEB..., double-branch, (2X))	EDH-GEA-00460	1303
208C4262G28	primary	GEA	Spectra breaker cover 208C4262G28 (TEB..., double-branch, (2X))	EDH-GEA-00461	1303
208C4262G29	primary	GEA	Spectra breaker cover 208C4262G29 (TEB..., double-branch, (3X))	EDH-GEA-00462	1304
208C4262G3	primary	GEA	Spectra breaker cover 208C4262G3 (TFJ..., single-branch, (3X))	EDH-GEA-00467	1304
208C4262G30	primary	GEA	Spectra breaker cover 208C4262G30 (TEB..., double-branch, (3X))	EDH-GEA-00463	1305
208C4262G31	primary	GEA	Spectra breaker cover 208C4262G31 (TEB..., double-branch, (3X))	EDH-GEA-00464	1305
208C4262G32	primary	GEA	Spectra breaker cover 208C4262G32 (SEDA..., double-branch, (3X))	EDH-GEA-00444	1306
208C4262G33	primary	GEA	Spectra breaker cover 208C4262G33 (SEDA..., double-branch, (3X))	EDH-GEA-00445	1306
208C4262G34	primary	GEA	Spectra breaker cover 208C4262G34 (SEDA..., double-branch, (3X))	EDH-GEA-00446	1307
208C4262G35	primary	GEA	Spectra breaker cover 208C4262G35 (SEDA..., double-branch, (4X))	EDH-GEA-00447	1307
208C4262G36	primary	GEA	Spectra breaker cover 208C4262G36 (SEDA..., double-branch, (4X))	EDH-GEA-00448	1308
208C4262G49	primary	GEA	Spectra breaker cover 208C4262G49 (SGDA..., double-branch, (4X))	EDH-GEA-00485	1308
208C4262G53	primary	GEA	Spectra breaker cover 208C4262G53 (SFHA..., single-branch, (3X))	EDH-GEA-00449	1309
208C4262G54	primary	GEA	Spectra breaker cover 208C4262G54 (SFHA..., single-branch, (3X))	EDH-GEA-00450	1309
208C4262G55	primary	GEA	Spectra breaker cover 208C4262G55 (SFHA..., single-branch, (3X))	EDH-GEA-00451	1310
208C4262G56	primary	GEA	Spectra breaker cover 208C4262G56 (SFHA..., single-branch, (4X))	EDH-GEA-00452	1310
208C4262G57	primary	GEA	Spectra breaker cover 208C4262G57 (SFHA..., single-branch, (4X))	EDH-GEA-00453	1311
208C4262G58	primary	GEA	Spectra breaker cover 208C4262G58 (SFHA..., double-branch, (3X))	EDH-GEA-00454	1311
208C4262G59	primary	GEA	Spectra breaker cover 208C4262G59 (SFHA..., double-branch, (3X))	EDH-GEA-00455	1312
208C4262G6	primary	GEA	Spectra breaker cover 208C4262G6 (TFJ..., double-branch, (3X))	EDH-GEA-00468	1312
208C4262G60	primary	GEA	Spectra breaker cover 208C4262G60 (SFHA..., double-branch, (3X))	EDH-GEA-00456	1313

Number	Type	Mfr	Description	Catalogue ID	Pg
208C4262G61	primary	GEA	Spectra breaker cover 208C4262G61 (SFHA..., double-branch, (4X))	EDH-GEA-00457	1313
208C4262G62	primary	GEA	Spectra breaker cover 208C4262G62 (SFHA..., double-branch, (4X))	EDH-GEA-00458	1314
208C4262G7	primary	GEA	Spectra breaker cover 208C4262G7 (TFJ..., double-branch, (3X))	EDH-GEA-00469	1314
2142720241	primary	SQD	QMB367W Series E1 renewal part: Load base mounting screw	EDH-SQD-00349	936
21427-20401	primary	SQD	QED cover screw 21427-20401	EDH-SQD-00365	998
2150720200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2150720200: Door leaf bolt (2 per set)	EDH-SQD-00371	998
2152620361	primary	SQD	FA/FH I-Line breaker mounting bracket screw 2152620361	EDH-SQD-00360	774
21590-20241	primary	SQD	PowerPact H/J I-Line mounting bracket screw 21590-20241	EDH-SQD-00359	775
21593-20100	primary	SQD	I-Line blank filler mounting screw 21593-20100	EDH-SQD-00357	775
225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	style_number	EAT	PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral	EDH-EAT-00229	239
2271020200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2271020200: Frame leaf bolt (2 per set	EDH-SQD-00370	998
2300100200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2300100200: Nut	EDH-SQD-00372	998
2322000003	primary	SQD	Elevating nut for MH boxes (4 required)	EDH-SQD-00613	922
2330241601	primary	SQD	QMB363TW Series E1 renewal part: Push nut for arc suppression assembly	EDH-SQD-00340	936
2342702001	primary	SQD	QMB363TW Series E1 renewal part: Lug mounting nut	EDH-SQD-00345	937
2342702400	primary	SQD	QMB367W Series E1 renewal part: Lug mounting nut	EDH-SQD-00352	937
2370100200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2370100200: Washer	EDH-SQD-00373	998
24WD56	primary	SIE	P3 box 24 in wide x 56 in high	EDH-SIE-00417	1513
24WD62	primary	SIE	P3 box 24 in wide x 62 in high	EDH-SIE-00418	1513
24WD68	primary	SIE	P3 box 24 in wide x 68 in high	EDH-SIE-00419	1513
24WD74	primary	SIE	P3 box 24 in wide x 74 in high	EDH-SIE-00420	1514
24WD80	primary	SIE	P3 box 24 in wide x 80 in high	EDH-SIE-00421	1514
252B1667P1	primary	GEA	GE Barrier center - 252B1667P1	EDH-GEA-00436	1288
252B1768G1	primary	GEA	GE End filler plate, K-frame, 44 in panelboard / 45 in switchboard - 252B1768G1	EDH-GEA-00499	1314
252B1768G2	primary	GEA	GE End filler plate, K-frame, 40 in panelboard or switchboard - 252B1768G2	EDH-GEA-00500	1315
252B2056P8	primary	GEA	GE Spacer plate TED6 with TEDL - 252B2056P8	EDH-GEA-00437	1315
252B3575P1	primary	GEA	GE Circuit breaker mounting bracket, G-frame bolt-on double-branch - 252B3575P1	EDH-GEA-00414	1287
252B3576P1	primary	GEA	GE Circuit breaker mounting bracket, G-frame bolt-on main/single-branch - 252B35	EDH-GEA-00413	1287
252B3613P1	primary	GEA	GE Antiturn clip (for 1/4-20 carriage bolt in square bus hole) - 252B3613P1	EDH-GEA-00415	1344
252B3618G10	primary	GEA	GE G frame double strap (bolt-on, double-branch) - 252B3618G10	EDH-GEA-00419	1281
252B3618G11	primary	GEA	GE G frame double strap (bolt-on, double-branch) - 252B3618G11	EDH-GEA-00420	1281
252B3618G13	primary	GEA	GE G frame single strap (bolt-on) - 252B3618G13	EDH-GEA-00416	1281
252B3618G14	primary	GEA	GE G frame single strap (bolt-on) - 252B3618G14	EDH-GEA-00417	1281
252B3618G15	primary	GEA	GE G frame single strap (bolt-on) - 252B3618G15	EDH-GEA-00418	1281
252B3638	primary	GEA	Spectra main lug assembly drawing 252B3638 (G1-G10)	EDH-GEA-00540	1215

Number	Type	Mfr	Description	Catalogue ID	Pg
252B3638G1-G2	style_number	GEA	Spectra main lug assembly drawing 252B3638 (G1-G10)	EDH-GEA-00540	1215
252B3638G3-G8	style_number	GEA	Spectra main lug assembly drawing 252B3638 (G1-G10)	EDH-GEA-00540	1215
252B3638G9-G10	style_number	GEA	Spectra main lug assembly drawing 252B3638 (G1-G10)	EDH-GEA-00540	1215
252B3657P1	primary	GEA	GE Strap spacer, G-frame bolt-on - 252B3657P1	EDH-GEA-00421	1361
252B3657P2	primary	GEA	GE Strap spacer, G-frame bolt-on - 252B3657P2	EDH-GEA-00422	1361
254V644P1	primary	GEA	GE cup washer 254V644P1 for mounting 1-pole E150 breakers	EDH-GEA-00718	1379
2600D26G01	primary	EAT	Series C J-frame panelboard connecting strap, center pole, 3.50 in, 250 A	EDH-EAT-00689	563
2600D26G02	primary	EAT	Series C J-frame panelboard connecting strap, outside pole, 3.50 in, 250 A	EDH-EAT-00690	563
267P963H01	primary	EAT	Eaton Number tabs (1-42)	EDH-EAT-01261	300
267P963H02	primary	EAT	Eaton Number tabs (43-84)	EDH-EAT-01262	301
286A8066G1	primary	GEA	GE 286A8066G1 lug cover, TH4V/THK9V	EDH-GEA-00331	1422
29348	primary	SQD	PowerPact L-frame / D-frame control tap takeoff (voltage takeoff)	EDH-SQD-00383	1046
2A1690-1XX	primary	EAT	3FQS NEMA 1 box, 50 in tall (XX = endwall choice B blank / K knockout)	EDH-EAT-00829	413
2A1690-2XX	primary	EAT	3FQS NEMA 1 box, 59 in tall (XX = B/K endwalls)	EDH-EAT-00830	413
2A1690-3XX	primary	EAT	3FQS NEMA 1 box, 69 in tall (XX = B/K endwalls)	EDH-EAT-00831	413
2A1690-4XX	primary	EAT	3FQS NEMA 1 box, 33 in tall (XX = B/K endwalls)	EDH-EAT-00832	413
2A1906-1	primary	EAT	3FQS Branch deadfront kit, single KO, 18 positions	EDH-EAT-00839	406
2A1906-2	primary	EAT	3FQS Branch deadfront kit, single KO, 30 positions	EDH-EAT-00840	407
2A1906-3	primary	EAT	3FQS Branch deadfront kit, single KO, 42 positions	EDH-EAT-00841	407
2A1907-1	primary	EAT	3FQS Ground bar kit, non-isolated	EDH-EAT-00821	406
2A1907-2	primary	EAT	3FQS Ground bar kit, isolated	EDH-EAT-00822	406
2A1908-1	primary	EAT	3FQS Neutral bar kit, 200A unbonded	EDH-EAT-00823	405
2A1908-2	primary	EAT	3FQS Neutral bar kit, 400A unbonded	EDH-EAT-00824	405
2A1908-3	primary	EAT	3FQS Neutral bar kit, 200A bonded	EDH-EAT-00825	405
2A1908-4	primary	EAT	3FQS Neutral bar kit, 400A bonded	EDH-EAT-00826	405
2A1908-5	primary	EAT	3FQS Neutral bar kit, 800A unbonded	EDH-EAT-00827	405
2A1908-6	primary	EAT	3FQS Neutral bar kit, 800A bonded	EDH-EAT-00828	406
2A1909-1	primary	EAT	3FQS kit, compression lug 3-phase, 70-200A	EDH-EAT-00792	393
2A1909-10	primary	EAT	3FQS kit, compression lug 3-phase, 30-60A	EDH-EAT-00801	393
2A1909-11	primary	EAT	3FQS kit, mechanical lug 3-phase, 30-60A	EDH-EAT-00802	394
2A1909-12	primary	EAT	3FQS kit, compression lug 1-phase, 3 wire, 30-60A	EDH-EAT-00803	394
2A1909-13	primary	EAT	3FQS kit, mechanical lug 1-phase, 3 wire, 30-60A	EDH-EAT-00804	395
2A1909-14	primary	EAT	3FQS kit, compression lug 1-phase, 2 wire, 70-200A	EDH-EAT-00805	395
2A1909-15	primary	EAT	3FQS kit, mechanical lug 1-phase, 2 wire, 70-200A	EDH-EAT-00806	396
2A1909-16	primary	EAT	3FQS kit, double/sub-feed lug 1-phase, 2 wire, 30-200A	EDH-EAT-00807	402
2A1909-17	primary	EAT	3FQS kit, compression lug 1-phase, 2 wire, 30-60A	EDH-EAT-00808	396
2A1909-18	primary	EAT	3FQS kit, mechanical lug 1-phase, 2 wire, 30-60A	EDH-EAT-00809	397
2A1909-19	primary	EAT	3FQS kit, main disconnect 30-60A 1-phase, 2 wire	EDH-EAT-00810	391
2A1909-2	primary	EAT	3FQS kit, mechanical lug 3-phase, 70-200A	EDH-EAT-00793	397
2A1909-20	primary	EAT	3FQS kit, compression lug 3-phase, 225-400A	EDH-EAT-00811	398
2A1909-21	primary	EAT	3FQS kit, mechanical lug 3-phase, 225-400A	EDH-EAT-00812	398
2A1909-22	primary	EAT	3FQS kit, double/sub-feed lug 3-phase, 225-400A	EDH-EAT-00813	402
2A1909-23	primary	EAT	3FQS kit, compression lug 1-phase, 3 wire, 225-400A	EDH-EAT-00814	399
2A1909-24	primary	EAT	3FQS kit, mechanical lug 1-phase, 3 wire, 225-400A	EDH-EAT-00815	399
2A1909-25	primary	EAT	3FQS kit, double/sub-feed lug 1-phase, 3 wire, 225-400A	EDH-EAT-00816	403
2A1909-26	primary	EAT	3FQS kit, compression lug 1-phase, 2 wire, 225-400A	EDH-EAT-00817	400
2A1909-27	primary	EAT	3FQS kit, mechanical lug 1-phase, 2 wire, 225-400A	EDH-EAT-00818	400
2A1909-28	primary	EAT	3FQS kit, double/sub-feed lug 1-phase, 2 wire, 225-400A	EDH-EAT-00819	403
2A1909-29	primary	EAT	3FQS kit, main disconnect 225-400A	EDH-EAT-00820	391

Number	Type	Mfr	Description	Catalogue ID	Pg
2A1909-3	primary	EAT	3FQS kit, double/sub-feed lug 3-phase, 30-200A	EDH-EAT-00794	404
2A1909-4	primary	EAT	3FQS kit, main disconnect 70-200A	EDH-EAT-00795	391
2A1909-5	primary	EAT	3FQS kit, compression lug 1-phase, 3 wire, 70-200A	EDH-EAT-00796	401
2A1909-6	primary	EAT	3FQS kit, mechanical lug 1-phase, 3 wire, 70-200A	EDH-EAT-00797	401
2A1909-7	primary	EAT	3FQS kit, double/sub-feed lug 1-phase, 3 wire, 30-200A	EDH-EAT-00798	404
2A1909-8	primary	EAT	3FQS kit, main disconnect 30-60A 1-phase, 3 wire	EDH-EAT-00799	392
2A1909-9	primary	EAT	3FQS kit, main disconnect 30-60A 3-phase	EDH-EAT-00800	392
2A1910-1	primary	EAT	3FQS Kit, NEMA 3R replacement keys (2)	EDH-EAT-00845	416
2A1910-2	primary	EAT	3FQS Kit, NEMA 1 door lock and 2 keys	EDH-EAT-00846	416
2A1910-3	primary	EAT	3FQS Kit, NEMA 3R door lock and 2 keys	EDH-EAT-00847	417
2A1910-4	primary	EAT	3FQS Kit, NEMA 1 replacement keys (2)	EDH-EAT-00848	417
2A1912-1	primary	EAT	3FQS Lockout kit, 70-400A main	EDH-EAT-00849	415
2A1912-2	primary	EAT	3FQS Lockout kit, 30-60A main	EDH-EAT-00850	415
2A1912-3	primary	EAT	3FQS Branch lockout kit (3M Panelsafe), 18 position	EDH-EAT-00851	415
2A1912-4	primary	EAT	3FQS Branch lockout kit (3M Panelsafe), 30 position	EDH-EAT-00852	416
2A1912-5	primary	EAT	3FQS Branch lockout kit (3M Panelsafe), 42 position	EDH-EAT-00853	416
2A1915	primary	EAT	3FQS Kit, circuit number and fuse rating labels	EDH-EAT-00855	417
2A1916-1	primary	EAT	3FQS Kit, blank enclosure endwall (set of 2)	EDH-EAT-00837	413
2A1916-2	primary	EAT	3FQS Kit, knockout enclosure endwall (set of 2)	EDH-EAT-00838	414
2A1917-2	primary	EAT	3FQS Kit, CCPB hardware (10 screws)	EDH-EAT-00857	415
2A1918-1	primary	EAT	3FQS Kit, branch knockout covers, <=60A	EDH-EAT-00858	408
2A1918-2	primary	EAT	3FQS Kit, branch knockout covers, 70A-100A	EDH-EAT-00859	408
2A1919	primary	EAT	3FQS Kit, touch-up paint	EDH-EAT-00860	417
2A1960-1	primary	EAT	3FQS Branch deadfront kit, double KO, 18 positions	EDH-EAT-00842	407
2A1960-2	primary	EAT	3FQS Branch deadfront kit, double KO, 30 positions	EDH-EAT-00843	407
2A1960-3	primary	EAT	3FQS Branch deadfront kit, double KO, 42 positions	EDH-EAT-00844	407
2A1961-1	primary	EAT	3FQS Kit, spare fuse compartment TCF 1-100A	EDH-EAT-00861	417
2C11296	primary	EAT	Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)	EDH-EAT-00236	242
2C11641G02	primary	EAT	Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X	EDH-EAT-00413	287
2C11642	primary	EAT	PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00164	236
2C11642G03, G07, G11, G15 ... G59, G63 (silver-plated copper only)	style_number	EAT	PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00164	236
2NLK30A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	1638
2NLK30A	primary	SIE	Revised P1-250 200% neutral lug kit, 30-circuit	EDH-SIE-00320	1638
2NLK42A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	1638
2NLK42A	primary	SIE	Revised P1-250 200% neutral lug kit, 42-circuit	EDH-SIE-00321	1638
2NLK42B	primary	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	1638
2NLK54A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00041	1639
2NLK54A	primary	SIE	Revised P1-250 200% neutral lug kit, 54-circuit	EDH-SIE-00322	1639
2NLK54B	primary	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00041	1639
2T400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00479	575
2T400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (2T400K)	EDH-EAT-00494	576
2T402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00488	576
2TA2N8750	primary	SIE	Siemens 2TA2N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00281	1788
2TA3N8750	primary	SIE	Siemens 2TA3N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00283	1788
2TA3NG750	primary	SIE	VL NG 3-cable 750 lug, 2-pack	EDH-SIE-00624	1808
2TA400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00474	577

Number	Type	Mfr	Description	Catalogue ID	Pg
2TA400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (2TA400K)	EDH-EAT-00491	578
2TA401K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00482	578
2TA401KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (2TA401K)	EDH-EAT-00497	579
2TA401LDK	primary	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00500	609
2TA402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00485	579
2TA4N8500	primary	SIE	Siemens 2TA4N8500 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00285	1789
2TA4NG500	primary	SIE	VL NG 4-cable 500 lug, 2-pack	EDH-SIE-00627	1808
2TA4P8500	primary	SIE	Siemens 2TA4P8500 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00287	1789
2TA603LDK	primary	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00505	610
2TA603LDKCW	primary	EAT	Series C L-frame terminal with control wire termination (2TA603LDK)	EDH-EAT-00510	611
3100323960A001	primary	GEA	ReliaGear SB breaker compartment dead front cover 3100323960A001	EDH-GEA-01048	1373
31018103569A001	primary	GEA	ReliaGear SB breaker compartment dead front cover 31018103569A001	EDH-GEA-01047	1373
314C420G05	primary	EAT	Series C L-frame terminal shield	EDH-EAT-00642	622
314C960G01	primary	EAT	Series C M-frame rear connecting stud (225 A)	EDH-EAT-00667	640
314C960G04	primary	EAT	Series C M-frame rear connecting stud (400 A)	EDH-EAT-00668	640
314C960G05	primary	EAT	Series C M-frame rear connecting stud (400 A)	EDH-EAT-00669	640
314C960G06	primary	EAT	Series C M-frame rear connecting stud (400 A)	EDH-EAT-00670	641
314C960G07	primary	EAT	Series C L/M-frame rear connecting stud (L: stud length 5.47 in)	EDH-EAT-00664	624
314C960G08	primary	EAT	Series C L/M-frame rear connecting stud (L: 7.97 in)	EDH-EAT-00665	624
314C960G09	primary	EAT	Series C L/M-frame rear connecting stud (L: 10.47 in)	EDH-EAT-00666	625
314C960G10	primary	EAT	Series C M-frame rear connecting stud (800 A)	EDH-EAT-00671	641
314C960G11	primary	EAT	Series C M-frame rear connecting stud (800 A)	EDH-EAT-00672	641
314C960G12	primary	EAT	Series C M-frame rear connecting stud (800 A)	EDH-EAT-00673	642
314C996G01	primary	EAT	Series C M-frame panelboard connecting strap, short, 3.50 in, 800 A	EDH-EAT-00695	635
314C996G02	primary	EAT	Series C M-frame panelboard connecting strap, medium, 3.50 in, 800 A	EDH-EAT-00696	636
314C996G03	primary	EAT	Series C M-frame panelboard connecting strap, long, 3.50 in, 800 A	EDH-EAT-00697	637
315A7046P7	primary	GEA	SG breaker strap, A phase (A-Series II)	EDH-GEA-00019	1104
315A7046P8	primary	GEA	SG breaker strap, B phase (A-Series II)	EDH-GEA-00020	1104
315A7046P9	primary	GEA	SG breaker strap, C phase (A-Series II)	EDH-GEA-00021	1104
315A7048P20	primary	GEA	Center (B phase) strap (THQB/TEY, A-Series II)	EDH-GEA-00028	1105
315A7049P10	primary	GEA	A & C phase 200A strap (THQB/TEY, A-Series II)	EDH-GEA-00027	1105
315C270H01	primary	EAT	Series C M/N-frame panelboard strap mounting bracket	EDH-EAT-00705	638
32508	primary	SQD	PowerPact D-frame 400 A field-installable lug kit (with terminal cover)	EDH-SQD-00468	1020
32510	primary	SQD	PowerPact D-frame 600 A field-installable lug kit (with terminal cover)	EDH-SQD-00469	1021
331A1519G1	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G1	EDH-GEA-00821	1361
331A1519G10	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G10	EDH-GEA-00834	1362
331A1519G11	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G11	EDH-GEA-00837	1362
331A1519G12	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G12	EDH-GEA-00829	1362
331A1519G13	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G13	EDH-GEA-00838	1363

Number	Type	Mfr	Description	Catalogue ID	Pg
331A1519G14	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G14	EDH-GEA-00835	1363
331A1519G15	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G15	EDH-GEA-00839	1363
331A1519G16	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G16	EDH-GEA-00830	1364
331A1519G17	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G17	EDH-GEA-00840	1364
331A1519G18	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G18	EDH-GEA-00836	1364
331A1519G19	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G19	EDH-GEA-00841	1365
331A1519G2	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G2	EDH-GEA-00822	1365
331A1519G20	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G20	EDH-GEA-00831	1365
331A1519G21	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G21	EDH-GEA-00842	1365
331A1519G22	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G22	EDH-GEA-00832	1366
331A1519G3	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G3	EDH-GEA-00823	1366
331A1519G4	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G4	EDH-GEA-00824	1366
331A1519G5	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G5	EDH-GEA-00825	1366
331A1519G6	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G6	EDH-GEA-00826	1367
331A1519G7	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G7	EDH-GEA-00827	1367
331A1519G8	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G8	EDH-GEA-00828	1367
331A1519G9	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1519G9	EDH-GEA-00833	1367
331A1543G1	primary	GEA	GE Spectra ADS switch handle kit 331A1543G1 (400-1200 A)	EDH-GEA-00851	1368
331A1545G1	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1545G1	EDH-GEA-00843	1368
331A1545G2	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1545G2	EDH-GEA-00847	1368
331A1545G3	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1545G3	EDH-GEA-00844	1369
331A1545G4	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1545G4	EDH-GEA-00848	1369
331A1545G5	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1545G5	EDH-GEA-00845	1369
331A1545G6	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1545G6	EDH-GEA-00849	1370
331A1545G7	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1545G7	EDH-GEA-00846	1370
331A1545G8	primary	GEA	GE Spectra ADS switch replacement load base kit 331A1545G8	EDH-GEA-00850	1370
331A3329P2	primary	GEA	GE Steel drive rivet #10 x 1/2 in - 331A3329P2	EDH-GEA-00438	1344
343L162G1	primary	GEA	GE breaker mounting screws 343L162G1 (1-pole E150, clearance-hole plates)	EDH-GEA-00707	1379
343L162G11	primary	GEA	GE breaker mounting screws 343L162G11 (J600, tapped-hole plates)	EDH-GEA-00710	1404
343L162G20	primary	GEA	GE breaker mounting screws 343L162G20 (J600, clearance-hole plates)	EDH-GEA-00711	1404
343L162G22	primary	GEA	GE breaker mounting screws 343L162G22 (THLC1, clearance-hole plates)	EDH-GEA-00712	1466

Number	Type	Mfr	Description	Catalogue ID	Pg
343L162G23	primary	GEA	GE breaker mounting screws 343L162G23 (THLC1, tapped-hole plates)	EDH-GEA-00713	1466
343L162G24	primary	GEA	GE breaker mounting screws 343L162G24 (THLC2, THLC4, TLB4, clearance-hole plates	EDH-GEA-00714	1466
343L162G25	primary	GEA	GE breaker mounting screws 343L162G25 (THLC2, THLC4, TLB4, tapped-hole plates)	EDH-GEA-00715	1467
343L162G7	primary	GEA	GE breaker mounting screws 343L162G7 (1-pole TE, E150, tapped-hole plates)	EDH-GEA-00708	1379
343L184G18	primary	GEA	GE breaker mounting screws 343L184G18 (2- and 3-pole TQD/THQD, tapped-hole plate	EDH-GEA-00709	1465
343L564G1	primary	GEA	GE mounting screw kit 343L564G1 for motor-operated mechanism / plug-in base (TFJ	EDH-GEA-00721	1385
343L564G2	primary	GEA	GE mounting screw kit 343L564G2 for motor-operated mechanism / plug-in base (TJJ	EDH-GEA-00722	1403
343L564G3	primary	GEA	GE mounting screw kit 343L564G3 for motor-operated mechanism / plug-in base (TKM	EDH-GEA-00724	1421
343L564G4	primary	GEA	GE mounting screw kit 343L564G4 for TDR integral handle (TFC/TFJ/TFK)	EDH-GEA-00725	1386
343L564G7	primary	GEA	GE mounting screw kit 343L564G7 for motor-operated mechanism / plug-in base (TED	EDH-GEA-00720	1378
3456B35H01	primary	EAT	Vintage PRL1/PRL2 blank cover 6.00 in	EDH-EAT-00292	175
3456B99H01	primary	EAT	Vintage PRL1/PRL2 blank cover 3.00 in	EDH-EAT-00291	176
3456B99H05	primary	EAT	Vintage PRL1/PRL2 blank cover 15.00 in	EDH-EAT-00293	176
3457B16G01	primary	EAT	Vintage lighting and small panel standard trim lock	EDH-EAT-00412	177
359L481G1	primary	GEA	GE panelboard trim clamps, package of 4	EDH-GEA-00585	1155
36965	primary	SQD	PowerPact D-frame terminal shield 3P	EDH-SQD-00470	1022
36967	alias	SQD	PowerPact L/D-frame terminal screw set, M10 x 25 (4 pcs, one side)	EDH-SQD-00388	1045
373B375G03	primary	EAT	Series C N-frame rear connecting stud (1200 A)	EDH-EAT-00678	653
373B375G04	primary	EAT	Series C N-frame rear connecting stud (1200 A)	EDH-EAT-00677	653
374D883G01	primary	EAT	Series C F-frame rear connecting stud, 225 A short stud (110-225 A breakers)	EDH-EAT-00654	546
374D883G02	primary	EAT	Series C F-frame rear connecting stud, 225 A long stud	EDH-EAT-00655	546
39-3613-16	primary	EAT	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 1-phase	EDH-EAT-00907	150
39-3613-27	primary	EAT	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 3-pha	EDH-EAT-00911	150
3BRS225	primary	EAT	Type BR loadcenter main and subfeed lug block (3BRS225)	EDH-EAT-00452	24
3BRSF150	primary	EAT	Type BR loadcenter main and subfeed lug block (3BRSF150)	EDH-EAT-00451	24
3T100FB	primary	EAT	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	EDH-EAT-00462	524
3T125EF	primary	EAT	Series G EG-frame line/load terminals, 125 A, Cu	EDH-EAT-00536	660
3T150FB	primary	EAT	Series C F-frame line/load terminals, 200 A, Cu only (pkg of 3)	EDH-EAT-00466	525
3T20FB	primary	EAT	Series C F-frame line/load terminals, 20 (EHD) A, Cu/Al (pkg of 3)	EDH-EAT-00461	526
3T225FD	primary	EAT	Series C F-frame line/load terminals, 225 A, Cu only (pkg of 3)	EDH-EAT-00468	526
3T400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00480	580
3T400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (3T400K)	EDH-EAT-00495	581
3T402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00489	581
3T631LK	primary	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00545	684
3T632LK	primary	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu	EDH-EAT-00549	685
3T632LKW	primary	EAT	Series G LG-frame control wire terminal kit, 3P, copper	EDH-EAT-00556	686
3TA100FD	primary	EAT	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	EDH-EAT-00465	527
3TA100G3K	primary	EAT	Series C G-frame multiwire connector, 3 wires/terminal	EDH-EAT-00620	556
3TA100G6K	primary	EAT	Series C G-frame multiwire connector, 6 wires/terminal	EDH-EAT-00621	557
3TA125E3K	primary	EAT	Series G EG-frame multiwire connector	EDH-EAT-00577	660
3TA125E6K	primary	EAT	Series G EG-frame multiwire connector	EDH-EAT-00578	661

Number	Type	Mfr	Description	Catalogue ID	Pg
3TA125EF	primary	EAT	Series G EG-frame line/load terminals, 125 A, Cu/Al	EDH-EAT-00537	661
3TA12JG04	primary	SIE	VL JG power distribution connector 12-wire, 3-pack	EDH-SIE-00602	1808
3TA150EF	primary	EAT	Series G EG-frame line/load terminals, 125/160 A, Cu/Al	EDH-EAT-00538	662
3TA150F3K	primary	EAT	Series C F-frame multiwire connector, 3 wires/terminal	EDH-EAT-00622	528
3TA150F6K	primary	EAT	Series C F-frame multiwire connector, 6 wires/terminal	EDH-EAT-00623	528
3TA150FB	primary	EAT	Series C F-frame line/load terminals, 150 A, Cu/Al, Q18	EDH-EAT-00469	530
3TA160EFK	primary	EAT	Series G EG-frame line/load terminals, 160 A, Cu/Al	EDH-EAT-00539	663
3TA1CG30	primary	SIE	VL CG Al/Cu lug, 3-pack	EDH-SIE-00623	1808
3TA1DG30	primary	SIE	VL DG Al/Cu lug, 3-pack	EDH-SIE-00607	1809
3TA1QR300	primary	SIE	Siemens 3TA1QR300 lug kit (3), QR2 100-250A	EDH-SIE-00253	1756
3TA225FD	primary	EAT	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	EDH-EAT-00463	530
3TA225FDK	primary	EAT	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	EDH-EAT-00467	531
3TA250FJ3	primary	EAT	Series G JG-frame multiwire connector	EDH-EAT-00579	672
3TA250FJ6	primary	EAT	Series G JG-frame multiwire connector	EDH-EAT-00580	673
3TA250J3K	primary	EAT	Series C J-frame multiwire connector, 3 wires/terminal	EDH-EAT-00624	559
3TA250J6K	primary	EAT	Series C J-frame multiwire connector, 6 wires/terminal	EDH-EAT-00625	560
3TA2N8750	primary	SIE	Siemens 3TA2N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00282	1789
3TA3DG02	primary	SIE	VL DG power 3-wire distribution connector, 3-pack	EDH-SIE-00592	1809
3TA3FG20	primary	SIE	VL FG power 3-wire distribution connector, 3-pack	EDH-SIE-00596	1809
3TA3N8750	primary	SIE	Siemens 3TA3N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00284	1790
3TA3NG750	primary	SIE	VL NG 3-cable 750 lug, 3-pack	EDH-SIE-00625	1809
3TA400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00475	582
3TA400K3K	primary	EAT	Series C K-frame multiwire connector, 3 wires/terminal	EDH-EAT-00626	582
3TA400K6K	primary	EAT	Series C K-frame multiwire connector, 6 wires/terminal	EDH-EAT-00627	583
3TA400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (3TA400K)	EDH-EAT-00492	584
3TA401K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00483	584
3TA401KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (3TA401K)	EDH-EAT-00498	585
3TA401LDK	primary	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00501	611
3TA402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00486	586
3TA4N8500	primary	SIE	Siemens 3TA4N8500 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00286	1790
3TA4NG500	primary	SIE	VL NG 4-cable 500 lug, 3-pack	EDH-SIE-00628	1809
3TA4NG500H	primary	SIE	VL NG 4-cable 500 lug H, 3-pack	EDH-SIE-00630	1810
3TA4P8500	primary	SIE	Siemens 3TA4P8500 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00288	1790
3TA50FB	primary	EAT	Series C F-frame line/load terminals, 50 A, Cu/Al (pkg of 3)	EDH-EAT-00464	532
3TA603LDK	primary	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00506	612
3TA603LDKCW	primary	EAT	Series C L-frame terminal with control wire termination (3TA603LDK)	EDH-EAT-00511	613
3TA631LK	primary	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00543	686
3TA632LK	primary	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	EDH-EAT-00547	687
3TA632LKW	primary	EAT	Series G LG-frame control wire terminal kit, 3P, aluminum	EDH-EAT-00554	688
3TA6DG04	primary	SIE	VL DG power 6-wire distribution connector, 3-pack	EDH-SIE-00594	1810
3TA6FG04	primary	SIE	VL FG power 6-wire distribution connector, 3-pack	EDH-SIE-00598	1810
3TA6JG20	primary	SIE	VL JG power distribution connector 6-wire, 3-pack	EDH-SIE-00600	1810
3TA6PG750	primary	SIE	VL PG 6-cable 750 kcmil Al lug, 3-pack	EDH-SIE-00637	1810
3TAW1FG350	primary	SIE	VL FG Al/Cu lug, 3-pack	EDH-SIE-00615	1811
3TC1DG30	primary	SIE	VL DG Cu lug, 3-pack	EDH-SIE-00610	1811
3TC1GG20	primary	SIE	Siemens 3TC1GG20 lug pack of 3, NGG/HGG/LGG 35-125A	EDH-SIE-00248	1752
3TC1Q1	primary	SIE	Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A	EDH-SIE-00246	1753

Number	Type	Mfr	Description	Catalogue ID	Pg
3TC1QR250	primary	SIE	Siemens 3TC1QR250 copper lug kit (3), QR2	EDH-SIE-00254	1757
3TC1QR2520	alias	SIE	Siemens 3TC1QR250 copper lug kit (3), QR2	EDH-SIE-00254	1757
3TC4NG500	primary	SIE	VL NG 4-cable 500 Cu lug, 3-pack	EDH-SIE-00631	1811
3TCW1FG350	primary	SIE	VL FG Cu lug, 3-pack	EDH-SIE-00618	1811
3TW1CG20	primary	SIE	VL CG wrap-around terminal, 3-pack	EDH-SIE-00622	1811
3TW1DG20	primary	SIE	VL DG wrap-around terminal, 3-pack	EDH-SIE-00604	1812
3TW1FG350	primary	SIE	VL FG wrap-around terminal, 3-pack	EDH-SIE-00612	1812
3TW1JG600	primary	SIE	VL JG wrap-around terminal 600, 3-pack	EDH-SIE-00620	1812
3VA9233-0QA00	primary	SIE	3VA52 250A nut keeper kit (3)	EDH-SIE-00207	1732
3VA9243-0QA00	primary	SIE	3VA61/62 150A/250A nut keeper kit (3)	EDH-SIE-00208	1732
3VA9473-0QA00	primary	SIE	3VA5, 3VA6 400A/600A nut keeper kit (3)	EDH-SIE-00209	1733
3VL9120-4TC31	equivalent	SIE	VL CG wrap-around terminal, 3-pack	EDH-SIE-00622	1811
3VL9130-4TD31	equivalent	SIE	VL CG Al/Cu lug, 3-pack	EDH-SIE-00623	1808
3VL9200-4EC31	equivalent	SIE	VL DG front busbar connection set, 3-pole	EDH-SIE-00584	1823
3VL9200-4EC41	equivalent	SIE	VL DG front busbar connection set, 4-pole	EDH-SIE-00585	1823
3VL9200-4PA31	equivalent	SIE	VL DG plug-in base, rear connection, 3-pole	EDH-SIE-00639	1818
3VL9200-4PA41	equivalent	SIE	VL DG plug-in base, rear connection, 4-pole	EDH-SIE-00640	1819
3VL9200-4PC31	equivalent	SIE	VL DG plug-in base, front connection, 3-pole	EDH-SIE-00641	1818
3VL9200-4PC41	equivalent	SIE	VL DG plug-in base, front connection, 4-pole	EDH-SIE-00642	1818
3VL9200-4PS31	equivalent	SIE	VL DG plug-in contact (breaker side) kit, 3-pole	EDH-SIE-00647	1821
3VL9200-4PS41	equivalent	SIE	VL DG plug-in contact kit, 4-pole	EDH-SIE-00648	1821
3VL9200-4RA01	equivalent	SIE	VL DG rear terminal short, round	EDH-SIE-00555	1830
3VL9200-4RB01	equivalent	SIE	VL DG rear terminal long, round	EDH-SIE-00557	1830
3VL9200-4RC31	equivalent	SIE	VL DG rear stud round, 3-pole set	EDH-SIE-00558	1833
3VL9200-4RF41	equivalent	SIE	VL DG rear stud round, 4-pole set	EDH-SIE-00559	1833
3VL9200-4RK01	equivalent	SIE	VL DG rear terminal short, flat	EDH-SIE-00554	1830
3VL9200-4RL01	equivalent	SIE	VL DG rear terminal long, flat	EDH-SIE-00556	1830
3VL9200-4RM31	equivalent	SIE	VL DG rear stud flat, 3-pole set	EDH-SIE-00560	1832
3VL9200-4RN41	equivalent	SIE	VL DG rear stud flat, 4-pole set	EDH-SIE-00561	1833
3VL9202-4TP01	equivalent	SIE	VL DG power 3-wire distribution connector, single	EDH-SIE-00591	1814
3VL9202-4TP31	equivalent	SIE	VL DG power 3-wire distribution connector, 3-pack	EDH-SIE-00592	1809
3VL9204-4TP01	equivalent	SIE	VL DG power 6-wire distribution connector, single	EDH-SIE-00593	1814
3VL9204-4TP31	equivalent	SIE	VL DG power 6-wire distribution connector, 3-pack	EDH-SIE-00594	1810
3VL9220-4TC01	equivalent	SIE	VL DG box/wrap-around terminal 20 (single)	EDH-SIE-00603	1816
3VL9220-4TC31	equivalent	SIE	VL DG wrap-around terminal, 3-pack	EDH-SIE-00604	1812
3VL9220-4TC41	equivalent	SIE	VL DG wrap-around terminal, 4-pack	EDH-SIE-00605	1813
3VL9230-4TD01	equivalent	SIE	VL DG Al/Cu lug (single)	EDH-SIE-00606	1814
3VL9230-4TD11	equivalent	SIE	VL DG Cu lug (single)	EDH-SIE-00609	1815
3VL9230-4TD31	equivalent	SIE	VL DG Al/Cu lug, 3-pack	EDH-SIE-00607	1809
3VL9230-4TD41	equivalent	SIE	VL DG Al/Cu lug, 4-pack	EDH-SIE-00608	1812
3VL9230-4TD61	equivalent	SIE	VL DG Cu lug, 3-pack	EDH-SIE-00610	1811
3VL9300-4EC31	equivalent	SIE	VL FG front busbar connection set, 3-pole	EDH-SIE-00586	1823
3VL9300-4EC41	equivalent	SIE	VL FG front busbar connection set, 4-pole	EDH-SIE-00587	1823
3VL9300-4PA31	equivalent	SIE	VL FG plug-in base, rear connection, 3-pole	EDH-SIE-00643	1819
3VL9300-4PA41	equivalent	SIE	VL FG plug-in base, rear connection, 4-pole	EDH-SIE-00644	1819
3VL9300-4PC31	equivalent	SIE	VL FG plug-in base, front connection, 3-pole	EDH-SIE-00645	1819
3VL9300-4PC41	equivalent	SIE	VL FG plug-in base, front connection, 4-pole	EDH-SIE-00646	1819
3VL9300-4PF01	equivalent	SIE	VL FG plug-in accessory (PCXFT)	EDH-SIE-00649	1821
3VL9300-4RA01	equivalent	SIE	VL FG rear terminal short, round	EDH-SIE-00563	1831
3VL9300-4RB01	equivalent	SIE	VL FG rear terminal long, round	EDH-SIE-00565	1831
3VL9300-4RC31	equivalent	SIE	VL FG rear stud round, 3-pole set	EDH-SIE-00566	1834
3VL9300-4RF41	equivalent	SIE	VL FG rear stud round, 4-pole set	EDH-SIE-00567	1834

Number	Type	Mfr	Description	Catalogue ID	Pg
3VL9300-4RK01	equivalent	SIE	VL FG rear terminal short, flat	EDH-SIE-00562	1831
3VL9300-4RL01	equivalent	SIE	VL FG rear terminal long, flat	EDH-SIE-00564	1831
3VL9300-4RM31	equivalent	SIE	VL FG rear stud flat, 3-pole set	EDH-SIE-00568	1833
3VL9300-4RN41	equivalent	SIE	VL FG rear stud flat, 4-pole set	EDH-SIE-00569	1833
3VL9300-8CA31	equivalent	SIE	VL CG/DG/FG extended terminal cover (TSL), 3-pole	EDH-SIE-00542	1826
3VL9300-8CA41	equivalent	SIE	VL CG/DG/FG extended terminal cover (TSL), 4-pole	EDH-SIE-00543	1827
3VL9300-8CE01	primary	SIE	VL CG/DG/FG interphase barrier (3-pole set)	EDH-SIE-00537	1825
3VL9300-8CE41	equivalent	SIE	VL CG/DG/FG interphase barrier, 4-pole	EDH-SIE-00536	1825
3VL9302-4TP01	equivalent	SIE	VL FG power 3-wire distribution connector, single	EDH-SIE-00595	1814
3VL9302-4TP31	equivalent	SIE	VL FG power 3-wire distribution connector, 3-pack	EDH-SIE-00596	1809
3VL9304-4TP01	equivalent	SIE	VL FG power 6-wire distribution connector, single	EDH-SIE-00597	1815
3VL9304-4TP31	equivalent	SIE	VL FG power 6-wire distribution connector, 3-pack	EDH-SIE-00598	1810
3VL9335-4TC01	equivalent	SIE	VL FG wrap-around terminal 350 (single)	EDH-SIE-00611	1816
3VL9335-4TC31	equivalent	SIE	VL FG wrap-around terminal, 3-pack	EDH-SIE-00612	1812
3VL9335-4TC41	equivalent	SIE	VL FG wrap-around terminal, 4-pack	EDH-SIE-00613	1813
3VL9335-4TD01	equivalent	SIE	VL FG Al/Cu lug 350 (single)	EDH-SIE-00614	1815
3VL9335-4TD11	equivalent	SIE	VL FG Cu lug (single)	EDH-SIE-00617	1816
3VL9335-4TD31	equivalent	SIE	VL FG Al/Cu lug, 3-pack	EDH-SIE-00615	1811
3VL9335-4TD41	equivalent	SIE	VL FG Al/Cu lug, 4-pack	EDH-SIE-00616	1813
3VL9335-4TD61	equivalent	SIE	VL FG Cu lug, 3-pack	EDH-SIE-00618	1811
3VL9400-4EC31	equivalent	SIE	VL JG front busbar connection set, 3-pole	EDH-SIE-00588	1824
3VL9400-4EC41	equivalent	SIE	VL JG front busbar connection set, 4-pole	EDH-SIE-00589	1824
3VL9400-4PA31	equivalent	SIE	VL JG plug-in base, rear connection, 3-pole	EDH-SIE-00650	1820
3VL9400-4PA41	equivalent	SIE	VL JG plug-in base, rear connection, 4-pole	EDH-SIE-00651	1820
3VL9400-4PF01	equivalent	SIE	VL JG/LG plug-in accessory (PCXLT)	EDH-SIE-00653	1821
3VL9400-4RA01	equivalent	SIE	VL JG rear terminal short, round	EDH-SIE-00570	1832
3VL9400-4RC31	equivalent	SIE	VL JG rear stud round, 3-pole set	EDH-SIE-00574	1834
3VL9400-4RF41	equivalent	SIE	VL JG rear stud round, 4-pole set	EDH-SIE-00575	1834
3VL9400-4RK01	equivalent	SIE	VL JG rear terminal short, flat	EDH-SIE-00572	1832
3VL9400-4RL01	equivalent	SIE	VL JG rear terminal long, flat	EDH-SIE-00571	1831
3VL9400-4RN41	equivalent	SIE	VL JG rear stud flat, 4-pole set	EDH-SIE-00573	1834
3VL9400-8CA31	equivalent	SIE	VL JG/LG terminal shield long (TSL), 3-pole	EDH-SIE-00544	1827
3VL9400-8CA41	equivalent	SIE	VL JG/LG terminal shield long (TSL), 4-pole	EDH-SIE-00545	1827
3VL9400-8CB31	equivalent	SIE	VL JG/LG terminal shield short (TSS), 3-pole	EDH-SIE-00546	1828
3VL9400-8CB41	equivalent	SIE	VL JG/LG terminal shield short (TSS), 4-pole	EDH-SIE-00547	1829
3VL9402-4TP01	equivalent	SIE	VL JG power distribution connector 6-wire, single	EDH-SIE-00599	1815
3VL9402-4TP31	equivalent	SIE	VL JG power distribution connector 6-wire, 3-pack	EDH-SIE-00600	1810
3VL9404-4TP01	equivalent	SIE	VL JG power distribution connector 12-wire, single	EDH-SIE-00601	1814
3VL9404-4TP31	equivalent	SIE	VL JG power distribution connector 12-wire, 3-pack	EDH-SIE-00602	1808
3VL9460-4EC31	equivalent	SIE	VL LG front busbar connection set, 3-pole	EDH-SIE-00590	1824
3VL9460-4PC41	equivalent	SIE	VL LG plug-in base, front connection, 4-pole	EDH-SIE-00652	1820
3VL9460-4RG01	equivalent	SIE	VL LG rear terminal short, flat	EDH-SIE-00576	1832
3VL9460-4RH31	equivalent	SIE	VL LG rear stud flat, 3-pole set	EDH-SIE-00577	1835
3VL9460-4RH41	equivalent	SIE	VL LG rear stud flat, 4-pole set	EDH-SIE-00578	1835
3VL9460-4TC01	equivalent	SIE	VL JG wrap-around terminal 600, single	EDH-SIE-00619	1816
3VL9460-4TC31	equivalent	SIE	VL JG wrap-around terminal 600, 3-pack	EDH-SIE-00620	1812
3VL9460-4TC41	equivalent	SIE	VL JG wrap-around terminal 600, 4-pack	EDH-SIE-00621	1813
3VL9600-4PA31	equivalent	SIE	VL MG plug-in base, rear connection, 3-pole	EDH-SIE-00654	1820
3VL9600-4PF01	equivalent	SIE	VL MG plug-in accessory (PCXMT)	EDH-SIE-00657	1822
3VL9600-4PS31	equivalent	SIE	VL MG plug-in contact kit, 3-pole	EDH-SIE-00655	1821
3VL9600-4RH31	equivalent	SIE	VL MG rear stud flat, 3-pole set	EDH-SIE-00579	1835
3VL9600-4RH41	equivalent	SIE	VL MG rear stud flat, 4-pole set	EDH-SIE-00580	1835

Number	Type	Mfr	Description	Catalogue ID	Pg
3VL9600-4WH01	equivalent	SIE	VL MG plug-in accessory (PCXMH)	EDH-SIE-00656	1822
3VL9600-8CA31	equivalent	SIE	VL MG terminal shield long (TSL), 3-pole	EDH-SIE-00548	1827
3VL9600-8CA41	equivalent	SIE	VL MG terminal shield long (TSL), 4-pole	EDH-SIE-00549	1828
3VL9600-8CB31	equivalent	SIE	VL MG terminal shield short (TSS), 3-pole	EDH-SIE-00550	1829
3VL9600-8CB41	equivalent	SIE	VL MG terminal shield short (TSS), 4-pole	EDH-SIE-00551	1829
3VL9600-8CE01	primary	SIE	VL JG/LG/MG interphase barrier	EDH-SIE-00539	1825
3VL9600-8CE41	equivalent	SIE	VL JG/LG/MG interphase barrier, 4-pole	EDH-SIE-00538	1825
3VL9600-8CG31	equivalent	SIE	VL MG terminal shield long, M variant, 3-pole	EDH-SIE-00552	1828
3VL9600-8CG41	equivalent	SIE	VL MG terminal shield long, M variant, 4-pole	EDH-SIE-00553	1828
3VL9600-8SB41	equivalent	SIE	VL MG/NG/PG breaker mounting screw kit, 4-pole	EDH-SIE-00638	1826
3VL9700-4PA31	equivalent	SIE	VL NG plug-in base, rear connection, 3-pole	EDH-SIE-00658	1820
3VL9700-4PS31	equivalent	SIE	VL NG plug-in contact kit, 3-pole	EDH-SIE-00659	1822
3VL9700-4RG01	equivalent	SIE	VL NG rear terminal short, flat	EDH-SIE-00581	1832
3VL9700-4RH31	equivalent	SIE	VL NG rear stud flat, 3-pole set	EDH-SIE-00582	1835
3VL9700-4RJ41	equivalent	SIE	VL NG rear stud flat, 4-pole set	EDH-SIE-00583	1836
3VL9750-4TH21	equivalent	SIE	VL NG 4-cable 500 lug, 2-pack	EDH-SIE-00627	1808
3VL9750-4TH31	equivalent	SIE	VL NG 4-cable 500 lug, 3-pack	EDH-SIE-00628	1809
3VL9750-4TH41	equivalent	SIE	VL NG 4-cable 500 lug, 4-pack	EDH-SIE-00629	1813
3VL9750-4TH61	equivalent	SIE	VL NG 4-cable 500 Cu lug, 3-pack	EDH-SIE-00631	1811
3VL9750-4TK31	equivalent	SIE	VL NG 4-cable 500 lug H, 3-pack	EDH-SIE-00630	1810
3VL9750-4TM31	equivalent	SIE	VL NG compression lug kit 500 kcmil (12 lugs)	EDH-SIE-00632	1808
3VL9775-4TG21	equivalent	SIE	VL NG 3-cable 750 lug, 2-pack	EDH-SIE-00624	1808
3VL9775-4TG31	equivalent	SIE	VL NG 3-cable 750 lug, 3-pack	EDH-SIE-00625	1809
3VL9775-4TG41	equivalent	SIE	VL NG 3-cable 750 lug, 4-pack	EDH-SIE-00626	1812
3VL9800-4EB01	equivalent	SIE	VL PG lug mounting assembly 1600	EDH-SIE-00635	1824
3VL9800-4PF01	equivalent	SIE	VL NG/PG plug-in accessory (PCXPT)	EDH-SIE-00660	1822
3VL9800-4TU31	equivalent	SIE	VL PG breaker mounting base 1600	EDH-SIE-00633	1818
3VL9800-4TV31	equivalent	SIE	VL PG breaker mounting base 1601	EDH-SIE-00634	1818
3VL9800-8CE01	primary	SIE	VL NG/PG interphase barrier	EDH-SIE-00541	1825
3VL9800-8CE41	equivalent	SIE	VL NG/PG interphase barrier, 4-pole	EDH-SIE-00540	1826
3VL9875-4TH31	equivalent	SIE	Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)	EDH-SIE-00297	1817
3VL9875-4TJ01	equivalent	SIE	VL PG 6-cable 750 kcmil Al lug (single)	EDH-SIE-00636	1815
3VL9875-4TJ31	equivalent	SIE	VL PG 6-cable 750 kcmil Al lug, 3-pack	EDH-SIE-00637	1810
4020506501	primary	SQD	QMB363TW Series E1 renewal part: Load base mounting screw	EDH-SQD-00342	937
40251-016-51	primary	SQD	QMB/QMJ switch terminal lug 40251-016-51	EDH-SQD-00283	925
40251-018-50	primary	SQD	QMB/QMJ switch terminal lug 40251-018-50	EDH-SQD-00285	925
4025101851	primary	SQD	QMB363TW Series E1 renewal part: Lug assembly	EDH-SQD-00344	926
40251-162-50	primary	SQD	QMB/QMJ switch terminal lug 40251-162-50	EDH-SQD-00287	926
40251-287-50	primary	SQD	QMB/QMJ switch terminal lug 40251-287-50	EDH-SQD-00289	926
40256-014-50	primary	SQD	QMB/QMJ switch terminal lug 40256-014-50	EDH-SQD-00286	927
40256-034-50	primary	SQD	QMB/QMJ switch terminal lug 40256-034-50	EDH-SQD-00284	927
40256-039-50	primary	SQD	QMB/QMJ switch terminal lug 40256-039-50	EDH-SQD-00290	927
4028343250	primary	SQD	QMB367W Series E1 renewal part: Switch mounting hardware kit:	EDH-SQD-00353	935
4028343550	primary	SQD	QMB367W Series E1 renewal part: Handle knob kit	EDH-SQD-00351	936
4028343750	primary	SQD	QMB363TW Series E1 renewal part: Handle knob kit	EDH-SQD-00343	936
40517-407-01	style_number	SQD	I-Line blank filler kit, 4.5 in. (5 per kit)	EDH-SQD-00143	748
40517-408-01	style_number	SQD	I-Line blank filler kit, 1.5 in. (3 per kit)	EDH-SQD-00142	747
4051749901	primary	SQD	I-Line deadfront (trim) support bracket 4051749901	EDH-SQD-00361	736
4052017302	primary	SQD	QMB363TW Series E1 renewal part: Arc shield	EDH-SQD-00339	977
4052021450	primary	SQD	QMB363TW Series E1 renewal part: Arc suppressor assembly	EDH-SQD-00338	977

Number	Type	Mfr	Description	Catalogue ID	Pg
4052021650	primary	SQD	QMB363TW Series E1 renewal part: Load base assembly	EDH-SQD-00341	977
4052031850	primary	SQD	QMB367W Series E1 renewal part: Arc suppressor assembly	EDH-SQD-00346	977
4052036750	primary	SQD	QMB367W Series E1 renewal part: Load base assembly	EDH-SQD-00348	977
4052085601	primary	SQD	QMB367W Series E1 renewal part: Arc shield	EDH-SQD-00347	978
4052098601	primary	SQD	QMB367W Series E1 renewal part: Load base side insulator	EDH-SQD-00350	932
40560-270-50	primary	SQD	QMB/QMJ switch terminal lug 40560-270-50	EDH-SQD-00288	928
414A380G01	primary	EAT	Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)	EDH-EAT-00446	177
414A380G02	primary	EAT	Trim clamp for CDP, FDP and NQB	EDH-EAT-00420	95
4176B51	primary	EAT	PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)	EDH-EAT-00261	362
4176B56	primary	EAT	PRL3a/3X deadfront device cover: LCL vertical cover 21X	EDH-EAT-00264	362
4176B57	primary	EAT	PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only	EDH-EAT-00263	362
4176B60	primary	EAT	PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)	EDH-EAT-00259	362
4176B61	primary	EAT	PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)	EDH-EAT-00260	363
4176B66	primary	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3	EDH-EAT-00275	363
4176B67	primary	EAT	PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP	EDH-EAT-00277	363
4176B68	supersedes	EAT	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH,	EDH-EAT-00255	367
4176B68	primary	EAT	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (P	EDH-EAT-00267	363
4176B69	primary	EAT	PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cov	EDH-EAT-00278	364
4176B70	primary	EAT	PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cove	EDH-EAT-00262	364
4176B72	primary	EAT	PRL3a/3X neutral / blank cover 1X-12X	EDH-EAT-00269	370
4176B79	primary	EAT	PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X	EDH-EAT-00265	364
4176B80	primary	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3	EDH-EAT-00276	364
4178B06H01	supersedes	EAT	PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019	EDH-EAT-00285	370
4178B06H01	primary	EAT	PRL3a F-frame 1-pole provision filler (panels built before April 2019)	EDH-EAT-00286	370
4178B08	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3	EDH-EAT-00270	367
4178B08	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horiz	EDH-EAT-00280	365
4179B39	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizo	EDH-EAT-00271	368
4179B39	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horiz	EDH-EAT-00281	365
4179B40	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizont	EDH-EAT-00272	368
4179B40	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizon	EDH-EAT-00282	365
4179B41	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00274	369
4179B41	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00283	365
4179B42	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00273	368
4179B42	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00284	366

Number	Type	Mfr	Description	Catalogue ID	Pg
4180B03	supersedes	EAT	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device co	EDH-EAT-00242	248
4180B03	primary	EAT	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-202	EDH-EAT-00245	246
4180B04	primary	EAT	PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover	EDH-EAT-00248	247
4180B05	supersedes	EAT	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	EDH-EAT-00244	248
4180B05	primary	EAT	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	EDH-EAT-00247	247
4180B08	primary	EAT	PRL1a/2a/1X/2X deadfront blank covers 1-16 in	EDH-EAT-00249	249
4180B52H01	primary	EAT	PRL1a/2a filler cover for F, J, K frame vertical device spaces	EDH-EAT-00252	249
4180B61	supersedes	EAT	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device co	EDH-EAT-00243	248
4180B61	primary	EAT	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-202	EDH-EAT-00246	247
4180B62	primary	EAT	PRL1a/2a/1X/2X service entrance bonding jumper kit	EDH-EAT-00219	287
4180B79	primary	EAT	PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt swit	EDH-EAT-00266	366
4180B91	primary	EAT	PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover	EDH-EAT-00279	366
4180B93	supersedes	EAT	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL	EDH-EAT-00256	367
4180B93	primary	EAT	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2	EDH-EAT-00268	366
4210B95G01	primary	EAT	Series C F-frame special terminal shield 3-pole for use with electrical operator	EDH-EAT-00633	540
4210B95G02	primary	EAT	Series C F-frame special terminal shield 4-pole for use with electrical operator	EDH-EAT-00634	540
4212B77G01	primary	EAT	Series C K-frame panelboard connecting strap, outside pole, 3.50 in, 400 A	EDH-EAT-00692	595
4212B78G02	primary	EAT	Series C K-frame panelboard connecting strap, center pole, 3.50 in, 400 A	EDH-EAT-00691	596
4218B80G01	primary	EAT	Eaton base mounting hardware, F-frame 2-pole	EDH-EAT-01330	555
42C1129H02	primary	EAT	Chassis mounting hardware, PRL1a/2a/3a	EDH-EAT-00416	288
42C1999G01	style_number	EAT	EZ Box, unpainted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-00998	278
42C1999G02	style_number	EAT	EZ Box, unpainted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01004	278
42C1999G03	style_number	EAT	EZ Box, unpainted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01010	279
42C1999G04	style_number	EAT	EZ Box, unpainted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01016	279
42C1999G05	style_number	EAT	EZ Box, unpainted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01022	279
42C1999G06	style_number	EAT	EZ Box, unpainted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01028	280
42C1999G07	style_number	EAT	EZ Box, unpainted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01034	280
42C1999G09	style_number	EAT	EZ Box, unpainted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01040	280
42C1999G12	style_number	EAT	EZ Box, unpainted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01046	281
42C1999G13	style_number	EAT	EZ Box, painted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-00999	281
42C1999G14	style_number	EAT	EZ Box, painted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01005	281
42C1999G15	style_number	EAT	EZ Box, painted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01011	282
42C1999G16	style_number	EAT	EZ Box, painted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01017	282
42C1999G17	style_number	EAT	EZ Box, painted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01023	282
42C1999G18	style_number	EAT	EZ Box, painted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01029	283
42C1999G19	style_number	EAT	EZ Box, painted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01035	283
42C1999G21	style_number	EAT	EZ Box, painted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01041	283
42C1999G24	style_number	EAT	EZ Box, painted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01047	284
42C4050	primary	EAT	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	EDH-EAT-00222	240
42C4051	primary	EAT	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00226	241

Number	Type	Mfr	Description	Catalogue ID	Pg
42C4052	primary	EAT	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A	EDH-EAT-00230	241
42C4255G01	style_number	EAT	EZ Trim, unvented surface-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01000	256
42C4255G02	style_number	EAT	EZ Trim, unvented surface-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01006	257
42C4255G03	style_number	EAT	EZ Trim, unvented surface-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01012	258
42C4255G04	style_number	EAT	EZ Trim, unvented surface-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01018	259
42C4255G05	style_number	EAT	EZ Trim, unvented surface-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01024	260
42C4255G06	style_number	EAT	EZ Trim, unvented surface-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01030	261
42C4255G07	style_number	EAT	EZ Trim, unvented surface-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01036	262
42C4255G09	style_number	EAT	EZ Trim, unvented surface-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01042	263
42C4255G12	style_number	EAT	EZ Trim, unvented surface-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01048	264
42C4258G01	style_number	EAT	EZ Trim, unvented flush-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01001	256
42C4258G02	style_number	EAT	EZ Trim, unvented flush-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01007	256
42C4258G03	style_number	EAT	EZ Trim, unvented flush-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01013	257
42C4258G04	style_number	EAT	EZ Trim, unvented flush-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01019	258
42C4258G05	style_number	EAT	EZ Trim, unvented flush-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01025	259
42C4258G06	style_number	EAT	EZ Trim, unvented flush-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01031	260
42C4258G07	style_number	EAT	EZ Trim, unvented flush-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01037	261
42C4258G09	style_number	EAT	EZ Trim, unvented flush-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01043	262
42C4258G12	style_number	EAT	EZ Trim, unvented flush-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01049	263
42C4261G01	style_number	EAT	EZ Trim, vented surface-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01002	265
42C4261G02	style_number	EAT	EZ Trim, vented surface-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01008	265
42C4261G03	style_number	EAT	EZ Trim, vented surface-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01014	266
42C4261G04	style_number	EAT	EZ Trim, vented surface-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01020	267
42C4261G05	style_number	EAT	EZ Trim, vented surface-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01026	268
42C4261G06	style_number	EAT	EZ Trim, vented surface-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01032	269
42C4261G07	style_number	EAT	EZ Trim, vented surface-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01038	270
42C4261G09	style_number	EAT	EZ Trim, vented surface-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01044	271
42C4261G12	style_number	EAT	EZ Trim, vented surface-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01050	272
42C4264G01	style_number	EAT	EZ Trim, vented flush-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01003	264
42C4264G02	style_number	EAT	EZ Trim, vented flush-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01009	265

Number	Type	Mfr	Description	Catalogue ID	Pg
42C4264G03	style_number	EAT	EZ Trim, vented flush-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01015	266
42C4264G04	style_number	EAT	EZ Trim, vented flush-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01021	267
42C4264G05	style_number	EAT	EZ Trim, vented flush-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01027	268
42C4264G06	style_number	EAT	EZ Trim, vented flush-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01033	269
42C4264G07	style_number	EAT	EZ Trim, vented flush-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01039	270
42C4264G09	style_number	EAT	EZ Trim, vented flush-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01045	271
42C4264G12	style_number	EAT	EZ Trim, vented flush-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01051	272
42C7980	primary	EAT	PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)	EDH-EAT-00257	419
42C7982	primary	EAT	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	EDH-EAT-00244	248
42C7982	superseded_by	EAT	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	EDH-EAT-00247	247
42C8055	primary	EAT	PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock	EDH-EAT-00258	419
42C8072	primary	EAT	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device co	EDH-EAT-00242	248
42C8072	superseded_by	EAT	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-202	EDH-EAT-00245	246
42C8073	primary	EAT	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device co	EDH-EAT-00243	248
42C8073	superseded_by	EAT	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-202	EDH-EAT-00246	247
42C8076	primary	EAT	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH,	EDH-EAT-00255	367
42C8076	superseded_by	EAT	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (P	EDH-EAT-00267	363
42C8077	primary	EAT	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL	EDH-EAT-00256	367
42C8077	superseded_by	EAT	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2	EDH-EAT-00268	366
42C8078	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3	EDH-EAT-00270	367
42C8078	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horiz	EDH-EAT-00280	365
42C8079	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizo	EDH-EAT-00271	368
42C8079	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horiz	EDH-EAT-00281	365
42C8080	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizont	EDH-EAT-00272	368
42C8080	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizon	EDH-EAT-00282	365
42C8081	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00273	368
42C8081	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00284	366
42C8082	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00274	369
42C8082	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00283	365
42C8083H01	primary	EAT	PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019	EDH-EAT-00285	370

Number	Type	Mfr	Description	Catalogue ID	Pg
42C8083H01	superseded_by	EAT	PRL3a F-frame 1-pole provision filler (panels built before April 2019)	EDH-EAT-00286	370
42NLK30A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	1641
42NLK30A	primary	SIE	Revised P1-400 200% neutral kit, 30-circuit	EDH-SIE-00323	1640
42NLK42A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	1641
42NLK42A	primary	SIE	Revised P1-400 200% neutral kit, 42-circuit	EDH-SIE-00324	1640
42NLK54A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	1641
42NLK54A	primary	SIE	Revised P1-400 200% neutral kit, 54-circuit	EDH-SIE-00325	1641
42NLK54B	primary	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	1641
451D874G01	primary	EAT	Series C F-frame rear connecting stud, 100 A short stud (15-100 A breakers)	EDH-EAT-00652	547
451D874G02	primary	EAT	Series C F-frame rear connecting stud, 100 A long stud	EDH-EAT-00653	548
455C592P1	primary	GEA	GE Lug cover, TKM/THKM - 455C592P1	EDH-GEA-00497	1354
455C592P2	primary	GEA	GE Lug cover, TK4V/TKL4V - 455C592P2	EDH-GEA-00498	1354
47-15718-2	primary	EAT	PH-L and NFB 21.00 in wide blank filler plate	EDH-EAT-00944	163
47-28007	primary	EAT	Type PH panelboard PH breaker cover plate, single-phase	EDH-EAT-00937	163
47-28008	primary	EAT	Type PH panelboard PH breaker cover plate, three-phase	EDH-EAT-00938	164
47-28266	primary	EAT	Type PH panelboard PH breaker cover plate, F- and C-Frame breakers	EDH-EAT-00936	164
4 ckt 2X H01; 8/4X H02; ... 32/16X H08	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizo	EDH-EAT-00271	368
4MLKA1	equivalent	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00019	1627
4MLKA1	primary	SIE	Original P1 400A main lug kit, 1-ph	EDH-SIE-00029	1479
4MLKA1A	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00019	1627
4MLKA1B	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00023	1628
4MLKA3	equivalent	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00020	1628
4MLKA3	primary	SIE	Original P1 400A main lug kit, 3-ph	EDH-SIE-00030	1479
4MLKA3A	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00020	1628
4MLKA3B	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00024	1630
4MLKC1	equivalent	SIE	Revised P1 400A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00021	1630
4MLKC1	primary	SIE	Original P1 400A main lug kit, 1-ph	EDH-SIE-00031	1479
4MLKC1A	primary	SIE	Revised P1 400A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00021	1630
4MLKC3	equivalent	SIE	Revised P1 400A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00022	1631
4MLKC3	primary	SIE	Original P1 400A main lug kit, 3-ph	EDH-SIE-00032	1480
4MLKC3A	primary	SIE	Revised P1 400A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00022	1631
4T400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00481	587
4T400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (4T400K)	EDH-EAT-00496	587
4T402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00490	588
4T631LK	primary	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00546	689
4T632LK	primary	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu	EDH-EAT-00550	689
4T632LKW	primary	EAT	Series G LG-frame control wire terminal kit, 4P, copper	EDH-EAT-00557	689
4TA160EFK	primary	EAT	Series G EG-frame line/load terminals, 160 A, Cu/Al	EDH-EAT-00540	664
4TA1DG30	primary	SIE	VL DG Al/Cu lug, 4-pack	EDH-SIE-00608	1812
4TA3NG750	primary	SIE	VL NG 3-cable 750 lug, 4-pack	EDH-SIE-00626	1812
4TA400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00476	588
4TA400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (4TA400K)	EDH-EAT-00493	589
4TA401K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00484	589
4TA401KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (4TA401K)	EDH-EAT-00499	590
4TA401LDK	primary	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00502	614
4TA402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00487	590
4TA4NG500	primary	SIE	VL NG 4-cable 500 lug, 4-pack	EDH-SIE-00629	1813

Number	Type	Mfr	Description	Catalogue ID	Pg
4TA603LDK	primary	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00507	614
4TA603LDKCW	primary	EAT	Series C L-frame terminal with control wire termination (4TA603LDK)	EDH-EAT-00512	615
4TA631LK	primary	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00544	690
4TA632LK	primary	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	EDH-EAT-00548	690
4TA632LKW	primary	EAT	Series G LG-frame control wire terminal kit, 4P, aluminum	EDH-EAT-00555	691
4TAW1FG350	primary	SIE	VL FG Al/Cu lug, 4-pack	EDH-SIE-00616	1813
4TW1DG20	primary	SIE	VL DG wrap-around terminal, 4-pack	EDH-SIE-00605	1813
4TW1FG350	primary	SIE	VL FG wrap-around terminal, 4-pack	EDH-SIE-00613	1813
4TW1JG600	primary	SIE	VL JG wrap-around terminal 600, 4-pack	EDH-SIE-00621	1813
5010D23G01	primary	EAT	Series C J-frame rear connecting stud, 250 A short stud	EDH-EAT-00656	569
5010D23G02	primary	EAT	Series C J-frame rear connecting stud, 250 A long stud	EDH-EAT-00657	569
50552-108-01	primary	SQD	NEMA 3R QED-2 switchboard replacement door handle 50552-108-01	EDH-SQD-00366	999
505C606G04	primary	EAT	Series C N-frame panelboard connecting strap, short, 3.50 in, 1200 A	EDH-EAT-00698	649
505C606G05	primary	EAT	Series C N-frame panelboard connecting strap, medium, 3.50 in, 1200 A	EDH-EAT-00699	650
505C606G06	primary	EAT	Series C N-frame panelboard connecting strap, long, 3.50 in, 1200 A	EDH-EAT-00700	651
506C052G01	primary	EAT	Series C L-frame panelboard connecting strap, outside pole, 600 A	EDH-EAT-00694	620
5078A98	primary	EAT	PRL3a/PRL3X service entrance bonding jumper kit	EDH-EAT-00220	371
5081A08G02	primary	EAT	PRL4 chassis mounting hardware	EDH-EAT-00417	488
5081A09G02	primary	EAT	PRL4 gutter cover mounting hardware	EDH-EAT-00418	488
5155C62H01	primary	EAT	QUICKLAG / GB / GHB 1-pole filler (branch space filler)	EDH-EAT-00253	250
5155C81G01	primary	EAT	Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels	EDH-EAT-00403	253
5155C81G03	primary	EAT	EZ Trim lock, 24-48 in	EDH-EAT-00409	253
5155C81G04	primary	EAT	EZ Trim lock/latch 5155C81G04	EDH-EAT-01176	254
5155C81G05	primary	EAT	EZ Trim lock/latch 5155C81G05	EDH-EAT-01177	254
5155C81G06	primary	EAT	EZ Trim lock/latch 5155C81G06	EDH-EAT-01178	255
5156C09	primary	EAT	Vintage PRL2 branch section deadfront cover	EDH-EAT-00290	175
5156C10	primary	EAT	Vintage PRL1 branch section deadfront cover	EDH-EAT-00289	175
5157C83G06	primary	EAT	Trim screws	EDH-EAT-00414	288
5158C03	primary	EAT	Vintage PRL1/PRL2 neutral bar, 100 A and 225 A	EDH-EAT-00239	173
5158C03G01	primary	EAT	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00439	173
5158C03G02	primary	EAT	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00438	173
5158C03G03	primary	EAT	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00441	173
5158C03G04	primary	EAT	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00440	173
5158C04G01	primary	EAT	Vintage PRL1/PRL2 400/600 A neutral bar	EDH-EAT-00240	174
5158C05	primary	EAT	Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)	EDH-EAT-00235	242
5158C05G01	primary	EAT	PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)	EDH-EAT-00443	174
5158C05G02	primary	EAT	PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)	EDH-EAT-00442	174
5158C05G05	primary	EAT	Vintage PRL1/PRL2 isolated ground bar, boxes under 30 in	EDH-EAT-00237	174
5158C05G06	primary	EAT	PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)	EDH-EAT-00444	175
5158C05G06 (boxes 30 in and above)	style_number	EAT	Vintage PRL1/PRL2 isolated ground bar, boxes under 30 in	EDH-EAT-00237	174
52-2751	primary	EAT	Panelboard trim lock (WEM 2 key)	EDH-EAT-00997	156

Number	Type	Mfr	Description	Catalogue ID	Pg
5652B38G01	primary	EAT	Series G Series G / G-frame control wire terminal kit (package of 12); for steel	EDH-EAT-00576	668
565B837G1	primary	GEA	GE TQL plug-in mounting base 565B837G1 (100 A, 3-pole)	EDH-GEA-00781	1388
565B837G2	primary	GEA	GE TQL plug-in mounting base 565B837G2 (100 A, 2-pole)	EDH-GEA-00782	1389
569B737P1	primary	GEA	GE A-Series replacement lock with standard key	EDH-GEA-00681	1093
569B737P2	primary	GEA	GE A-Series replacement lock with GE75 key	EDH-GEA-00682	1093
569B737P5	primary	GEA	GE additional keys for 569B737 lock	EDH-GEA-00683	1093
569B806G1	primary	GEA	GE circuit numbering strip 1-48	EDH-GEA-00684	1093
569B806G2	primary	GEA	GE circuit numbering strip 49-84 (43-84)	EDH-GEA-00685	1094
569B806G3	primary	GEA	GE circuit numbering strip 85-126	EDH-GEA-00686	1094
571B595DDG1	primary	GEA	GE TQL plug-in mounting base 571B595DDG1 (70 A, 2-pole)	EDH-GEA-00779	1389
571B595DDG2	primary	GEA	GE TQL plug-in mounting base 571B595DDG2 (70 A, 3-pole)	EDH-GEA-00780	1389
5EH2	primary	SIE	ITE twin mounting kit for FC20 / VB panels, EE/EH/EF/HE breakers, 150 A	EDH-SIE-00424	1710
5FJ2	equivalent	OTH	Aftermarket bus connection kit BFJITE (seller cross-ref to SIE 5FJ2)	EDH-OTH-00067	1714
5FJ2	primary	SIE	ITE twin mounting kit for FC20 / VB panels, FJ3/FJ breakers, 225 A	EDH-SIE-00425	1710
5JJ2	equivalent	OTH	Aftermarket bus connection kit BJLITE (seller cross-ref to SIE 5JJ2)	EDH-OTH-00066	1715
5JJ2	primary	SIE	ITE twin mounting kit, J-frame (JD3/JJ3/JL3/HJ3), 400 A	EDH-SIE-00426	1710
5PB2430G	primary	EAT	PRL5P back box, 24X chassis, 30.00 in (762.0 mm) wide	EDH-EAT-01179	517
5PB2448G	primary	EAT	PRL5P back box, 24X chassis, 48.00 in (1219.2 mm) wide	EDH-EAT-01182	517
5PB3230G	primary	EAT	PRL5P back box, 32X chassis, 30.00 in (762.0 mm) wide	EDH-EAT-01185	517
5PB3248G	primary	EAT	PRL5P back box, 32X chassis, 48.00 in (1219.2 mm) wide	EDH-EAT-01188	517
5PB4030G	primary	EAT	PRL5P back box, 40X chassis, 30.00 in (762.0 mm) wide	EDH-EAT-01191	518
5PB4048G	primary	EAT	PRL5P back box, 40X chassis, 48.00 in (1219.2 mm) wide	EDH-EAT-01194	518
5PCGBLD600S	primary	EAT	PRL5P grounded B-phase adapter kit, 600 A LD main breaker, single bus	EDH-EAT-00398	518
5PCGBLUG1200T	primary	EAT	PRL5P grounded B-phase adapter kit, 1200 A main lugs, double bus	EDH-EAT-00401	519
5PCGBLUG400S	primary	EAT	PRL5P grounded B-phase adapter kit, 400 A main lugs, single bus	EDH-EAT-00396	519
5PCGBLUG600S	primary	EAT	PRL5P grounded B-phase adapter kit, 600 A main lugs, single bus	EDH-EAT-00397	519
5PCGBLUG800S	primary	EAT	PRL5P grounded B-phase adapter kit, 800 A main lugs, single bus	EDH-EAT-00399	519
5PCGBMD800T	primary	EAT	PRL5P grounded B-phase adapter kit, 800 A MD main breaker, double bus	EDH-EAT-00400	519
5PCGBND1200T	primary	EAT	PRL5P grounded B-phase adapter kit, 1200 A ND main breaker, double bus	EDH-EAT-00402	520
5PD24S	primary	EAT	PRL5P trim door kit, 24X chassis, 30.00 in (762.0 mm) wide	EDH-EAT-01181	514
5PD24T	primary	EAT	PRL5P trim door kit, 24X chassis, 48.00 in (1219.2 mm) wide	EDH-EAT-01184	514
5PD32S	primary	EAT	PRL5P trim door kit, 32X chassis, 30.00 in (762.0 mm) wide	EDH-EAT-01187	514
5PD32T	primary	EAT	PRL5P trim door kit, 32X chassis, 48.00 in (1219.2 mm) wide	EDH-EAT-01190	515
5PD40S	primary	EAT	PRL5P trim door kit, 40X chassis, 30.00 in (762.0 mm) wide	EDH-EAT-01193	515
5PD40T	primary	EAT	PRL5P trim door kit, 40X chassis, 48.00 in (1219.2 mm) wide	EDH-EAT-01196	515
5PFP1S	primary	EAT	PRL5P 1X deadfront filler plate, single-bus chassis	EDH-EAT-00384	511
5PFP1T	primary	EAT	PRL5P 1X deadfront filler plate, double-bus chassis	EDH-EAT-00385	511
5PFP2S	primary	EAT	PRL5P 2X deadfront filler plate, single-bus chassis	EDH-EAT-00386	511
5PFP2T	primary	EAT	PRL5P 2X deadfront filler plate, double-bus chassis	EDH-EAT-00387	511
5PFP3S	primary	EAT	PRL5P 3X deadfront filler plate, single-bus chassis	EDH-EAT-00388	512
5PFP3T	primary	EAT	PRL5P 3X deadfront filler plate, double-bus chassis	EDH-EAT-00389	512
5PFP4S	primary	EAT	PRL5P 4X deadfront filler plate, single-bus chassis	EDH-EAT-00390	512
5PFP4T	primary	EAT	PRL5P 4X deadfront filler plate, double-bus chassis	EDH-EAT-00391	512
5PFP5S	primary	EAT	PRL5P 5X deadfront filler plate, single-bus chassis	EDH-EAT-00392	513

Number	Type	Mfr	Description	Catalogue ID	Pg
5PFP5T	primary	EAT	PRL5P 5X deadfront filler plate, double-bus chassis	EDH-EAT-00393	513
5PFP6S	primary	EAT	PRL5P 6X deadfront filler plate, single-bus chassis	EDH-EAT-00394	513
5PFP6T	primary	EAT	PRL5P 6X deadfront filler plate, double-bus chassis	EDH-EAT-00395	513
5PG1200A	primary	EAT	PRL5P 1200 A ground bar, Al/Cu	EDH-EAT-00382	510
5PG1200C	primary	EAT	PRL5P 1200 A ground bar, copper	EDH-EAT-00383	510
5PLUG31200TC	primary	EAT	PRL5P 600-1200 A lug unit, double-bus chassis	EDH-EAT-00377	507
5PLUG3400SC	primary	EAT	PRL5P 400 A main/through-feed lug unit, single-bus chassis	EDH-EAT-00374	507
5PLUG3600SC	primary	EAT	PRL5P 600 A lug unit, single-bus chassis	EDH-EAT-00375	507
5PLUG3800SC	primary	EAT	PRL5P 800 A lug unit, single-bus chassis	EDH-EAT-00376	508
5PN1200A	primary	EAT	PRL5P 1200 A neutral assembly, Al/Cu	EDH-EAT-00380	509
5PN1200C	primary	EAT	PRL5P 1200 A neutral assembly, copper	EDH-EAT-00381	509
5PN800A	primary	EAT	PRL5P 800 A neutral assembly, Al/Cu, (4) 250-500 kcmil	EDH-EAT-00378	509
5PN800C	primary	EAT	PRL5P 800 A neutral assembly, copper, (4) 250-500 kcmil	EDH-EAT-00379	510
5PNL1200	primary	EAT	PRL5P additional neutral lug (4) 3/0-750 kcmil Al/Cu	EDH-EAT-01200	508
5PNL400	primary	EAT	PRL5P additional neutral lug (1) 1/0-750 kcmil or (2) 1/0-300 kcmil Al/Cu	EDH-EAT-01197	508
5PNL600	primary	EAT	PRL5P additional neutral lug (2) 250-500 kcmil Al/Cu	EDH-EAT-01198	508
5PNL800	primary	EAT	PRL5P additional neutral lug (3) 3/0-750 kcmil Al/Cu	EDH-EAT-01199	509
5PT2430S	primary	EAT	PRL5P trim, 24X chassis, 30.00 in (762.0 mm) wide	EDH-EAT-01180	515
5PT2448S	primary	EAT	PRL5P trim, 24X chassis, 48.00 in (1219.2 mm) wide	EDH-EAT-01183	515
5PT3230S	primary	EAT	PRL5P trim, 32X chassis, 30.00 in (762.0 mm) wide	EDH-EAT-01186	516
5PT3248S	primary	EAT	PRL5P trim, 32X chassis, 48.00 in (1219.2 mm) wide	EDH-EAT-01189	516
5PT4030S	primary	EAT	PRL5P trim, 40X chassis, 30.00 in (762.0 mm) wide	EDH-EAT-01192	516
5PT4048S	primary	EAT	PRL5P trim, 40X chassis, 48.00 in (1219.2 mm) wide	EDH-EAT-01195	516
623B222G01	primary	EAT	Series C N-frame rear connecting stud (800 A)	EDH-EAT-00674	654
623B222G02	primary	EAT	Series C N-frame rear connecting stud (800 A)	EDH-EAT-00675	655
623B222G03	primary	EAT	Series C N-frame rear connecting stud (800 A)	EDH-EAT-00676	655
624B375G01	primary	EAT	Eaton base mounting hardware, F-frame 1-pole	EDH-EAT-01328	555
624B375G02	primary	EAT	Eaton base mounting hardware, F-frame 1-pole	EDH-EAT-01329	555
624B375G23	primary	EAT	Eaton base mounting hardware, G-frame	EDH-EAT-01326	558
624B600H01	primary	EAT	Series C F-frame panelboard strap mounting bracket	EDH-EAT-00702	538
624B600H02	primary	EAT	Series C F-frame panelboard strap mounting bracket	EDH-EAT-00701	539
624B609G01	primary	EAT	Series C L-frame panelboard connecting strap, center pole, 600 A	EDH-EAT-00693	621
625B229G06	primary	EAT	Series C F-frame terminal shield 1-pole, line	EDH-EAT-00629	540
625B229G07	primary	EAT	Series C F-frame terminal shield 2-pole, line	EDH-EAT-00630	541
625B229G08	primary	EAT	Series C F-frame terminal shield 3-pole, line	EDH-EAT-00631	541
625B229G09	primary	EAT	Series C F-frame terminal shield 4-pole, line	EDH-EAT-00632	541
6554C01	primary	EAT	PRL4/PRL4X blank cover for 24 in wide box (1X-20X)	EDH-EAT-00294	472
6554C01H01	primary	EAT	PRL4/PRL4X blank cover 1X, 24.00 in wide box	EDH-EAT-01128	472
6554C01H02	primary	EAT	PRL4/PRL4X blank cover 2X, 24.00 in wide box	EDH-EAT-01130	473
6554C01H03	primary	EAT	PRL4/PRL4X blank cover 3X, 24.00 in wide box	EDH-EAT-01132	473
6554C01H04	primary	EAT	PRL4/PRL4X blank cover 6X, 24.00 in wide box	EDH-EAT-01138	473
6554C01H05	primary	EAT	PRL4/PRL4X blank cover 7X, 24.00 in wide box	EDH-EAT-01140	473
6554C01H06	primary	EAT	PRL4/PRL4X blank cover 9X, 24.00 in wide box	EDH-EAT-01142	474
6554C01H07	primary	EAT	PRL4/PRL4X blank cover 10X, 24.00 in wide box	EDH-EAT-01144	474
6554C01H08	primary	EAT	PRL4/PRL4X blank cover 11X, 24.00 in wide box	EDH-EAT-01146	474
6554C01H09	primary	EAT	PRL4/PRL4X blank cover 12X, 24.00 in wide box	EDH-EAT-01148	474
6554C01H10	primary	EAT	PRL4/PRL4X blank cover 13X, 24.00 in wide box	EDH-EAT-01150	474
6554C01H11	primary	EAT	PRL4/PRL4X blank cover 15X, 24.00 in wide box	EDH-EAT-01152	475
6554C01H12	primary	EAT	PRL4/PRL4X blank cover 20X, 24.00 in wide box	EDH-EAT-01154	475
6554C01H13	primary	EAT	PRL4/PRL4X blank cover 4X, 24.00 in wide box	EDH-EAT-01134	475
6554C01H14	primary	EAT	PRL4/PRL4X blank cover 5X, 24.00 in wide box	EDH-EAT-01136	475

Number	Type	Mfr	Description	Catalogue ID	Pg
6554C02	primary	EAT	PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)	EDH-EAT-00295	476
6554C02H01	primary	EAT	PRL4/PRL4X blank cover 1X, 36.00 / 44.00 in wide box	EDH-EAT-01129	476
6554C02H02	primary	EAT	PRL4/PRL4X blank cover 2X, 36.00 / 44.00 in wide box	EDH-EAT-01131	476
6554C02H03	primary	EAT	PRL4/PRL4X blank cover 3X, 36.00 / 44.00 in wide box	EDH-EAT-01133	477
6554C02H04	primary	EAT	PRL4/PRL4X blank cover 6X, 36.00 / 44.00 in wide box	EDH-EAT-01139	477
6554C02H05	primary	EAT	PRL4/PRL4X blank cover 7X, 36.00 / 44.00 in wide box	EDH-EAT-01141	477
6554C02H06	primary	EAT	PRL4/PRL4X blank cover 9X, 36.00 / 44.00 in wide box	EDH-EAT-01143	477
6554C02H07	primary	EAT	PRL4/PRL4X blank cover 10X, 36.00 / 44.00 in wide box	EDH-EAT-01145	478
6554C02H08	primary	EAT	PRL4/PRL4X blank cover 11X, 36.00 / 44.00 in wide box	EDH-EAT-01147	478
6554C02H09	primary	EAT	PRL4/PRL4X blank cover 12X, 36.00 / 44.00 in wide box	EDH-EAT-01149	478
6554C02H10	primary	EAT	PRL4/PRL4X blank cover 13X, 36.00 / 44.00 in wide box	EDH-EAT-01151	478
6554C02H11	primary	EAT	PRL4/PRL4X blank cover 15X, 36.00 / 44.00 in wide box	EDH-EAT-01153	478
6554C02H12	primary	EAT	PRL4/PRL4X blank cover 20X, 36.00 / 44.00 in wide box	EDH-EAT-01155	479
6554C02H13	primary	EAT	PRL4/PRL4X blank cover 4X, 36.00 / 44.00 in wide box	EDH-EAT-01135	479
6554C02H14	primary	EAT	PRL4/PRL4X blank cover 5X, 36.00 / 44.00 in wide box	EDH-EAT-01137	479
6555C20H01	primary	EAT	PRL4 side gutter cover 5.00 x 57.00 in	EDH-EAT-01109	468
6555C21H01	primary	EAT	PRL4 side gutter cover 5.00 x 73.00 in	EDH-EAT-01110	468
6555C22H01	primary	EAT	PRL4 side gutter cover 6.00 x 73.00 in	EDH-EAT-01112	469
6555C23H01	primary	EAT	PRL4 side gutter cover 8.00 x 73.00 in	EDH-EAT-01113	469
6555C24H01	primary	EAT	PRL4 side gutter cover 14.00 x 73.00 in	EDH-EAT-01116	469
6555C25H01	primary	EAT	PRL4 side gutter cover 5.00 x 90.00 in	EDH-EAT-01111	469
6555C26H01	primary	EAT	PRL4 side gutter cover 6.00 x 90.00 in	EDH-EAT-01114	469
6555C27H01	primary	EAT	PRL4 side gutter cover 8.00 x 90.00 in	EDH-EAT-01115	470
6555C28H01	primary	EAT	PRL4 side gutter cover 14.00 x 90.00 in	EDH-EAT-01117	470
6555C40H01	primary	EAT	PRL3a C-frame (CA/CAH/HCA) 2-pole deadfront blank filler	EDH-EAT-00287	370
6555C41H01	primary	EAT	PRL3a C-frame (CA/CAH/HCA) 3-pole deadfront blank filler	EDH-EAT-00288	371
6559C59	primary	EAT	PRL3a/3X deadfront assembly frame (rails and end covers)	EDH-EAT-00254	369
6572C746G01	primary	EAT	PRL4 standard ground bus	EDH-EAT-00238	466
6574C74	primary	EAT	PRL4 vented cover assembly (side rails + top/bottom vented covers)	EDH-EAT-00298	470
6574C74G02	primary	EAT	PRL4 vented cover assembly, 24 in wide box	EDH-EAT-01077	470
6574C74G03	primary	EAT	PRL4 vented cover assembly, 24 in wide box	EDH-EAT-01082	470
6574C74G04	primary	EAT	PRL4 vented cover assembly, 24 in wide box	EDH-EAT-01087	471
6574C74G05	primary	EAT	PRL4 vented cover assembly, 36 in wide box	EDH-EAT-01092	471
6574C74G06	primary	EAT	PRL4 vented cover assembly, 36 in wide box	EDH-EAT-01097	471
6631C01G01	primary	EAT	Series C J-frame terminal shield 4-pole, line end	EDH-EAT-00636	564
6641C16G01	primary	EAT	Series C J-frame terminal shield 2/3-pole, load end	EDH-EAT-00637	565
6641C16G02	primary	EAT	Series C J-frame terminal shield 4-pole, load end	EDH-EAT-00638	565
6642C14G02	primary	EAT	Series C K-frame rear connecting stud, 400 A short stud, panel .75-1 in	EDH-EAT-00658	602
6642C14G03	primary	EAT	Series C K-frame rear connecting stud, 400 A long stud, panel .75-1 in	EDH-EAT-00661	603
6642C14G04	primary	EAT	Series C K-frame rear connecting stud, 400 A short stud, panel .50-.75 in	EDH-EAT-00659	603
6642C14G05	primary	EAT	Series C K-frame rear connecting stud, 400 A long stud, panel .50-.75 in	EDH-EAT-00662	603
6642C14G06	primary	EAT	Series C K-frame rear connecting stud, 400 A short stud, panel .25-.5 in	EDH-EAT-00660	604
6642C14G07	primary	EAT	Series C K-frame rear connecting stud, 400 A long stud, panel .25-.5 in	EDH-EAT-00663	605
6725D41H30	primary	EAT	Eaton Directory card envelope	EDH-EAT-01259	301
673B142G02	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 2.75 in bus spacing,	EDH-EAT-00679	535
673B142G03	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 150 A	EDH-EAT-00682	536

Number	Type	Mfr	Description	Catalogue ID	Pg
673B142G04	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 2.75 in, 150 A	EDH-EAT-00681	536
673B142G10	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 100 A	EDH-EAT-00680	536
6BL2C	primary	SIE	6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)	EDH-SIE-00201	1711
6 ckt 3X H01; 12/5X H02; 18/8X H03; 24/10X H04	style_number	EAT	PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cov	EDH-EAT-00278	364
6 ckt 3X H01; 12/6X H02; 18/9X H03; 24/12X H04; 30/15X H05; 36/18X H06; 42/21X H07; 48/24X H08	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3	EDH-EAT-00270	367
6 ckt 3X H01; 12 ckt 5X H02; 18 ckt 8X H03; 24 ckt 10X H04	style_number	EAT	PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP	EDH-EAT-00277	363
6CLE2	primary	SIE	6CLE2 connecting strap kit - CED (3.75in, twin)	EDH-SIE-00155	1563
6CLF1	primary	SIE	6CLF1 connecting strap kit - CFD6 (5in, single)	EDH-SIE-00191	1721
6CLF1C	alias	SIE	6CLF1 connecting strap kit - CFD6 (5in, single)	EDH-SIE-00191	1721
6CLJ1	primary	SIE	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	EDH-SIE-00194	1722
6CLJ1C	alias	SIE	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	EDH-SIE-00194	1722
6CLJ6	primary	SIE	Mounting hardware to mount CJD (CLD) into FC-1 panel, single, 600 A	EDH-SIE-00431	1711
6CLL1	primary	SIE	6CLL1 connecting strap kit - CLD6 (8.75in, single)	EDH-SIE-00198	1724
6CLL1C	alias	SIE	6CLL1 connecting strap kit - CLD6 (8.75in, single)	EDH-SIE-00198	1724
6E62	equivalent	OTH	Aftermarket bus connection kit BEDITE (seller cross-ref to SIE 6E62)	EDH-OTH-00054	1713
6E62	primary	SIE	6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)	EDH-SIE-00188	1565
6F62	equivalent	OTH	Aftermarket bus connection kit BFDITE (seller cross-ref to SIE 6F62)	EDH-OTH-00056	1714
6F62	primary	SIE	6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)	EDH-SIE-00190	1567
6FPB01	primary	SIE	6FPB01 blank plate, 1.25in unit space	EDH-SIE-00211	1557
6FPB02	primary	SIE	6FPB02 blank plate, 2.5in unit space	EDH-SIE-00212	1558
6FPB03	primary	SIE	6FPB03 blank plate, 3.75in unit space	EDH-SIE-00213	1558
6FPB05	primary	SIE	6FPB05 blank plate, 5in unit space	EDH-SIE-00214	1559
6FPB10	primary	SIE	6FPB10 blank plate, 10in unit space	EDH-SIE-00215	1559
6FPB15	primary	SIE	6FPB15 blank plate, 15in unit space	EDH-SIE-00216	1732
6JJ61	equivalent	OTH	Aftermarket bus connection kit BJDSGLITE (seller cross-ref to SIE 6JJ61)	EDH-OTH-00057	1715
6JJ61	primary	SIE	6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single	EDH-SIE-00192	1568
6JJ62	equivalent	OTH	Aftermarket bus connection kit BJDITE (seller cross-ref to SIE 6JJ62)	EDH-OTH-00058	1714
6JJ62	primary	SIE	6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)	EDH-SIE-00193	1569
6LL61	equivalent	OTH	Aftermarket bus connection kit BLDITE (seller cross-ref to SIE 6LL61)	EDH-OTH-00059	1716
6LL61	primary	SIE	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	EDH-SIE-00197	1570
6LL61C	alias	SIE	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	EDH-SIE-00197	1570
6M61C	primary	SIE	6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)	EDH-SIE-00203	1712
6N61C	primary	SIE	6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)	EDH-SIE-00204	1712
6QJ2	equivalent	OTH	Aftermarket bus connection kit BQJITE (seller cross-ref to SIE 6QJ2)	EDH-OTH-00055	1717
6QJ2	primary	SIE	6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)	EDH-SIE-00189	1572
6QR2	primary	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	1520
6QR2CAN	alias	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	1520

Number	Type	Mfr	Description	Catalogue ID	Pg
6QR2CCAN	alias	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	1520
6SCJ1	primary	SIE	6SCJ1 connecting strap kit - SCJD6 (8.75in, single)	EDH-SIE-00196	1726
6SCL1	primary	SIE	6SCL1 connecting strap kit - SCLD6 (8.75in, single)	EDH-SIE-00200	1727
6SCL61C	primary	SIE	6SCL61C connecting strap kit - SCJD6 (8.75in, single)	EDH-SIE-00202	1713
6SJL1	primary	SIE	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	EDH-SIE-00195	1573
6SJL1C	alias	SIE	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	EDH-SIE-00195	1573
6SLL1	primary	SIE	6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)	EDH-SIE-00199	1574
70010DCBCH	primary	EAT	Eaton PRL4/PRLC dead front cover screws (1/4-20 x .50)	EDH-EAT-01263	488
70010RBB8G	primary	EAT	Eaton PRL1a/2a/3a breaker mounting screws (10-32 x .56 hex head)	EDH-EAT-01256	288
70010RBBB8P	primary	EAT	Eaton EZ Trim anti-lift slide bracket 10-32 screw	EDH-EAT-01267	289
70030KBDBR	primary	EAT	Eaton PRL1a/2a/3a DF (deadfront) assembly screws (1/4-20 x .75 square rec.)	EDH-EAT-01257	289
70032SBB8D	primary	EAT	Eaton PRL1a/2a/3a DF mounting screws (10-32 x .38 hex head)	EDH-EAT-01258	289
70210AL616	primary	EAT	Eaton EZ box 1/4-20 hex flange mounting nut	EDH-EAT-01265	289
739137	primary	SQD	Square D leveling nut (NQOB panelboard)	EDH-SQD-00560	902
7494A11G02	primary	EAT	Vintage Fastrim trim clamps for B10B and PRL1/2/3	EDH-EAT-00419	177
7499A48G04	primary	EAT	Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X	EDH-EAT-00415	289
75A105457	primary	GEA	GE panelboard directory card holder	EDH-GEA-00584	1157
75A105503P101	primary	GEA	GE Conical spring washer 1/4 in - 75A105503P101	EDH-GEA-00424	1344
75A105503P105	primary	GEA	GE Conical spring washer 5/16 in - 75A105503P105	EDH-GEA-00425	1344
75B125198P101	primary	GEA	GE panelboard directory card	EDH-GEA-00583	1157
75C140025P104	primary	GEA	GE NLAB/NLTQ/DB neutral and bus support, 100-225 A	EDH-GEA-00570	1154
75C140025P105	primary	GEA	GE NLAB/NLTQ/DB main bus support, 100-600 A copper bus and 100-225 A aluminum bu	EDH-GEA-00568	1154
75C140025P106	primary	GEA	GE NLAB/NLTQ/DB main bus support, 400-600 A aluminum bus	EDH-GEA-00569	1154
75C140032P134	primary	GEA	GE NLAB/NLTQ/DB neutral support, 400-600 A (2 required)	EDH-GEA-00571	1155
75C140045G705	primary	GEA	GE main lug assembly for phase bars and neutral (100/225 A row), NLAB/NLTQ/DB	EDH-GEA-00577	1152
75C140485P103	primary	GEA	GE screw assembly for bolt-in branch breakers (one per hole), NLAB/NLTQ/DB	EDH-GEA-00576	1155
75C145005G703	primary	GEA	QMR panelboard filler plate 3X	EDH-GEA-00275	1127
75C145005G711	primary	GEA	CCB panelboard filler plate 2X	EDH-GEA-00270	1127
75C145005G715	primary	GEA	CCB panelboard filler plate 6X	EDH-GEA-00271	1128
75D165029P101T	primary	GEA	GE branch circuit insulator for TBQ and TQL breakers	EDH-GEA-00572	1155
75V100083P101	primary	GEA	GE panelboard door lock, single-point lever handle type with key	EDH-GEA-00586	1157
763B795P8	primary	GEA	GE main lug (with 763B795P9), 225 A row, NLAB/NLTQ/DB	EDH-GEA-00578	1153
763B795P9	primary	GEA	GE main lug (with 763B795P8), NLAB/NLTQ/DB	EDH-GEA-00579	1153
783643502277	alias	SIE	Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A	EDH-SIE-00246	1753
789A448G1	primary	GEA	GE 789A448G1 lug cover, TKM (for TC061/TCAL61/TCAL81/TC081A)	EDH-GEA-00328	1422
789A448G2	primary	GEA	GE 789A448G2 lug cover, TKM (for TC0121/TCAL121)	EDH-GEA-00329	1422
789A448G3	primary	GEA	GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain	EDH-GEA-00330	1422
789A448G377 (as printed)	alias	GEA	GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain	EDH-GEA-00330	1422
8000602001	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602001: Hinge pin	EDH-SQD-00369	999
8000602003	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602003: Hinge frame leaf	EDH-SQD-00367	997
80025-067-01	supersedes	SQD	Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)	EDH-SQD-00363	775

Number	Type	Mfr	Description	Catalogue ID	Pg
80031-024-02	primary	SQD	QED plug-button for unused holes 80031-024-02	EDH-SQD-00364	999
8003115801	primary	SQD	Panelboard directory cards	EDH-SQD-00614	923
8003115901	primary	SQD	Plastic stick-on directory pouch	EDH-SQD-00615	923
80034-187-02	style_number	SQD	I-Line blank extension, 1.5 in., wide side	EDH-SQD-00144	745
80034-188-03	style_number	SQD	I-Line blank extension, 4.5 in., wide side	EDH-SQD-00145	746
8004332501	primary	SQD	Circuit I.D. numbers 1 through 54, NEHB and NEHB column width	EDH-SQD-00607	789
8011010401	primary	SQD	Endwall for MH boxes - with knockouts (NQOD era)	EDH-SQD-00612	915
8011010501	primary	SQD	Endwall for MH boxes - blank (NQOD era)	EDH-SQD-00611	915
8011417101	primary	SQD	Slotted Roberts-head screw 8011417101 for I-Line deadfront bracket	EDH-SQD-00362	775
80121-651-01	style_number	SQD	I-Line blank extension, 1.5 in., narrow side	EDH-SQD-00146	743
80121-652-01	style_number	SQD	I-Line blank extension, 4.5 in., narrow side	EDH-SQD-00147	744
80121-653-01	style_number	SQD	I-Line blank extension, 4.5 in., wide side (electronic trip access)	EDH-SQD-00148	746
80121-752-01	style_number	SQD	I-Line blank extension, 4.5 in., narrow side (electronic trip access)	EDH-SQD-00149	744
8023317701	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 8023317701: Hinge door leaf	EDH-SQD-00368	997
8450C62H39	equivalent	EAT	Trim lock for right-handed door	EDH-EAT-00406	273
8450C62H39	primary	EAT	Trim lock for right-handed door	EDH-EAT-00407	255
8703C80G05	primary	EAT	Eaton base mounting hardware, G-frame	EDH-EAT-01327	559
8708C82G02	primary	EAT	PRL4 door-in-door trim mounting channel for BX2457	EDH-EAT-01078	467
8708C82G03	primary	EAT	PRL4 door-in-door trim mounting channel for BX2473	EDH-EAT-01083	467
8708C82G04	primary	EAT	PRL4 door-in-door trim mounting channel for BX2490	EDH-EAT-01088	467
8708C82G05	primary	EAT	PRL4 door-in-door trim mounting channel for BX3673	EDH-EAT-01093	467
8708C82G06	primary	EAT	PRL4 door-in-door trim mounting channel for BX3690	EDH-EAT-01098	467
8708C82G07	primary	EAT	PRL4 door-in-door trim mounting channel for BX4473	EDH-EAT-01102	467
8708C82G08	primary	EAT	PRL4 door-in-door trim mounting channel for BX4490	EDH-EAT-01106	468
8712C73H01	primary	EAT	Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3	EDH-EAT-00447	177
911E347P3	primary	GEA	3X branch base (THQB/TEY, A-Series II)	EDH-GEA-00029	1107
99-1016	primary	EAT	Cutler-Hammer panelboard trim clamp (PB)	EDH-EAT-00996	145
99-3613	primary	EAT	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 42 poles 400 A, box 63.0	EDH-EAT-00933	160
99-3613-10	primary	EAT	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 42 poles 600 A, box 63.0	EDH-EAT-00935	160
99-3613-11	primary	EAT	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 3-pha	EDH-EAT-00909	150
99-3613-13	primary	EAT	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 3-phase	EDH-EAT-00913	151
99-3613-14	primary	EAT	Type PH panelboard deadfront cover kit, MLO 1-ph 3-wire 40 poles 225 A, box 50.0	EDH-EAT-00925	161
99-3613-15	primary	EAT	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 30 poles 400 A, box 54.0	EDH-EAT-00932	161
99-3613-17	primary	EAT	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 3-pha	EDH-EAT-00910	151
99-3613-18	primary	EAT	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 30 poles 600 A, box 54.0	EDH-EAT-00934	161
99-3613-2	primary	EAT	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 18 poles 225 A, box 34.0	EDH-EAT-00929	161
99-3613-20	primary	EAT	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 1-pha	EDH-EAT-00903	151
99-3613-21	primary	EAT	Type PH panelboard deadfront cover kit, MLO 1-ph 3-wire 28 poles 600 A, box 54.0	EDH-EAT-00928	162
99-3613-22	primary	EAT	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 1-phase	EDH-EAT-00905	151
99-3613-24	primary	EAT	Type PH panelboard deadfront cover kit, MLO 1-ph 3-wire 40 poles 400 A, box 63.0	EDH-EAT-00927	162

Number	Type	Mfr	Description	Catalogue ID	Pg
99-3613-28	primary	EAT	Type PB panelboard deadfront cover kit, 21.00 in wide box, Main breaker, 3-phase	EDH-EAT-00916	152
99-3613-29	primary	EAT	Type PB panelboard deadfront cover kit, 21.00 in wide box, Main breaker, 1-phase	EDH-EAT-00908	152
99-3613-3	primary	EAT	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 3-phase	EDH-EAT-00915	152
99-3613-30	primary	EAT	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker, 3-phase	EDH-EAT-00914	152
99-3613-31	primary	EAT	Type PH panelboard deadfront cover kit, MLO 1-ph 3-wire 28 poles 400 A, box 54.0	EDH-EAT-00926	162
99-3613-4	primary	EAT	Type PB panelboard deadfront cover kit, 21.00 in wide box, Main lugs only, 3-pha	EDH-EAT-00912	153
99-3613-5	primary	EAT	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main lugs only, 1-pha	EDH-EAT-00902	153
99-3613-6	primary	EAT	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 42 poles 225 A, box 50.0	EDH-EAT-00931	162
99-3613-7	primary	EAT	Type PH panelboard deadfront cover kit, MLO 3-ph 4-wire 30 poles 225 A, box 42.0	EDH-EAT-00930	163
99-3613-8	primary	EAT	Type PB panelboard deadfront cover kit, 15.00 in wide box, Main breaker 1-phase	EDH-EAT-00906	153
99-3613-9	primary	EAT	Type PB panelboard deadfront cover kit, 21.00 in wide box, Main lugs only, 1-pha	EDH-EAT-00904	153
99-970	primary	EAT	Cutler-Hammer panelboard trim clamp (MP40, PWW)	EDH-EAT-00995	146
A01QR2	primary	SIE	Siemens QR auxiliary switch 1A-1B	EDH-SIE-00812	1689
A02QR2	primary	SIE	Siemens QR auxiliary switch 2A-2B	EDH-SIE-00813	1689
A1X1LTK	primary	EAT	Eaton F-frame 1A/1B auxiliary switch field kit	EDH-EAT-01309	373
A1X1PK	primary	EAT	Eaton F-frame 1A/1B auxiliary switch field kit	EDH-EAT-01305	374
A1X1RPKFDE	primary	EAT	Eaton F-frame 1A/1B auxiliary switch field kit for 3-pole F-frame with electroni	EDH-EAT-01311	374
A1X1RTK	primary	EAT	Eaton F-frame 1A/1B auxiliary switch field kit	EDH-EAT-01310	374
A2X1LPK	primary	EAT	Eaton F-frame 2A/2B auxiliary switch field kit	EDH-EAT-01307	374
A2X1RPK	primary	EAT	Eaton F-frame 2A/2B auxiliary switch field kit	EDH-EAT-01308	375
ACB311149	primary	GEA	Spectra SCP Plus replacement box ACB311149 (31 in W x 11.5 in D, 15X)	EDH-GEA-00913	1178
ACB311153	primary	GEA	Spectra SCP Plus replacement box ACB311153 (31 in W x 11.5 in D, 18X)	EDH-GEA-00914	1178
ACB311157	primary	GEA	Spectra SCP Plus replacement box ACB311157 (31 in W x 11.5 in D, 21X)	EDH-GEA-00915	1178
ACB311161	primary	GEA	Spectra SCP Plus replacement box ACB311161 (31 in W x 11.5 in D, 24X)	EDH-GEA-00916	1178
ACB311165	primary	GEA	Spectra SCP Plus replacement box ACB311165 (31 in W x 11.5 in D, 27X)	EDH-GEA-00917	1178
ACB311170	primary	GEA	Spectra SCP Plus replacement box ACB311170 (31 in W x 11.5 in D, 30X)	EDH-GEA-00918	1178
ACB311174	primary	GEA	Spectra SCP Plus replacement box ACB311174 (31 in W x 11.5 in D, 33X)	EDH-GEA-00919	1179
ACB311178	primary	GEA	Spectra SCP Plus replacement box ACB311178 (31 in W x 11.5 in D, 36X)	EDH-GEA-00920	1179
ACB311182	primary	GEA	Spectra SCP Plus replacement box ACB311182 (31 in W x 11.5 in D, 39X)	EDH-GEA-00921	1179
ACB311186	primary	GEA	Spectra SCP Plus replacement box ACB311186 (31 in W x 11.5 in D, 42X)	EDH-GEA-00922	1179
ACB401149	primary	GEA	Spectra SCP Plus replacement box ACB401149 (40 in W x 11.5 in D, 15X)	EDH-GEA-00923	1179
ACB401153	primary	GEA	Spectra SCP Plus replacement box ACB401153 (40 in W x 11.5 in D, 18X)	EDH-GEA-00924	1179
ACB401157	primary	GEA	Spectra SCP Plus replacement box ACB401157 (40 in W x 11.5 in D, 21X)	EDH-GEA-00925	1180
ACB401161	primary	GEA	Spectra SCP Plus replacement box ACB401161 (40 in W x 11.5 in D, 24X)	EDH-GEA-00926	1180

Number	Type	Mfr	Description	Catalogue ID	Pg
ACB401165	primary	GEA	Spectra SCP Plus replacement box ACB401165 (40 in W x 11.5 in D, 27X)	EDH-GEA-00927	1180
ACB401170	primary	GEA	Spectra SCP Plus replacement box ACB401170 (40 in W x 11.5 in D, 30X)	EDH-GEA-00928	1180
ACB401174	primary	GEA	Spectra SCP Plus replacement box ACB401174 (40 in W x 11.5 in D, 33X)	EDH-GEA-00929	1180
ACB401178	primary	GEA	Spectra SCP Plus replacement box ACB401178 (40 in W x 11.5 in D, 36X)	EDH-GEA-00930	1180
ACB401182	primary	GEA	Spectra SCP Plus replacement box ACB401182 (40 in W x 11.5 in D, 39X)	EDH-GEA-00931	1181
ACB401186	primary	GEA	Spectra SCP Plus replacement box ACB401186 (40 in W x 11.5 in D, 42X)	EDH-GEA-00932	1181
ACF3149S	primary	GEA	Spectra SCP Plus surface front ACF3149S (31 in box, 15X)	EDH-GEA-00933	1173
ACF3153S	primary	GEA	Spectra SCP Plus surface front ACF3153S (31 in box, 18X)	EDH-GEA-00934	1173
ACF3157S	primary	GEA	Spectra SCP Plus surface front ACF3157S (31 in box, 21X)	EDH-GEA-00935	1173
ACF3161S	primary	GEA	Spectra SCP Plus surface front ACF3161S (31 in box, 24X)	EDH-GEA-00936	1173
ACF3165S	primary	GEA	Spectra SCP Plus surface front ACF3165S (31 in box, 27X)	EDH-GEA-00937	1174
ACF3170S	primary	GEA	Spectra SCP Plus surface front ACF3170S (31 in box, 30X)	EDH-GEA-00938	1174
ACF3174S	primary	GEA	Spectra SCP Plus surface front ACF3174S (31 in box, 33X)	EDH-GEA-00939	1174
ACF3178S	primary	GEA	Spectra SCP Plus surface front ACF3178S (31 in box, 36X)	EDH-GEA-00940	1174
ACF3182S	primary	GEA	Spectra SCP Plus surface front ACF3182S (31 in box, 39X)	EDH-GEA-00941	1174
ACF3186S	primary	GEA	Spectra SCP Plus surface front ACF3186S (31 in box, 42X)	EDH-GEA-00942	1175
ACF4049S	primary	GEA	Spectra SCP Plus surface front ACF4049S (40 in box, 15X)	EDH-GEA-00943	1175
ACF4053S	primary	GEA	Spectra SCP Plus surface front ACF4053S (40 in box, 18X)	EDH-GEA-00944	1175
ACF4057S	primary	GEA	Spectra SCP Plus surface front ACF4057S (40 in box, 21X)	EDH-GEA-00945	1175
ACF4061S	primary	GEA	Spectra SCP Plus surface front ACF4061S (40 in box, 24X)	EDH-GEA-00946	1175
ACF4065S	primary	GEA	Spectra SCP Plus surface front ACF4065S (40 in box, 27X)	EDH-GEA-00947	1176
ACF4070S	primary	GEA	Spectra SCP Plus surface front ACF4070S (40 in box, 30X)	EDH-GEA-00948	1176
ACF4074S	primary	GEA	Spectra SCP Plus surface front ACF4074S (40 in box, 33X)	EDH-GEA-00949	1176
ACF4078S	primary	GEA	Spectra SCP Plus surface front ACF4078S (40 in box, 36X)	EDH-GEA-00950	1176
ACF4082S	primary	GEA	Spectra SCP Plus surface front ACF4082S (40 in box, 39X)	EDH-GEA-00951	1176
ACF4086S	primary	GEA	Spectra SCP Plus surface front ACF4086S (40 in box, 42X)	EDH-GEA-00952	1177
ACHK	primary	GEA	GE safety catch for trough covers	EDH-GEA-00696	1095
ACSFPKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	1164
ACSFPKSG	primary	GEA	Spectra SCP Plus filler plate and filler hardware ACSFPKSG (SGD, single mounted)	EDH-GEA-00905	1169
ACSFPKSK	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	1164
ACSFPKSK	primary	GEA	Spectra SCP Plus filler plate and filler hardware ACSFPKSK (SKH, single mounted)	EDH-GEA-00907	1169
ACSFPKTB4	primary	GEA	Spectra SCP Plus filler plate and filler hardware ACSFPKTB4 (TB4, single mounted	EDH-GEA-00909	1169
ACSHKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	1164
ACSHKSG	primary	GEA	Spectra SCP Plus hardware to mount one breaker ACSHKSG (SGD, single mounted)	EDH-GEA-00904	1181
ACSHKSK	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	1164
ACSHKSK	primary	GEA	Spectra SCP Plus hardware to mount one breaker ACSHKSK (SKH, single mounted)	EDH-GEA-00906	1182
ACSHKTB4	primary	GEA	Spectra SCP Plus hardware to mount one breaker ACSHKTB4 (TB4, single mounted)	EDH-GEA-00908	1182
ACSMKSG	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	1164
ACSMKSK	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	1164

Number	Type	Mfr	Description	Catalogue ID	Pg
ACSMKTB4	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKTB4 (TB4, single mounted)	EDH-GEA-00910	1165
ACSMKTB6	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKTB6 (TB6, single mounted)	EDH-GEA-00911	1165
ACSMKTB8	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKTB8 (TB8, single mounted)	EDH-GEA-00912	1165
ACTFPKEB1P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	1165
ACTFPKEB1P	primary	GEA	Spectra SCP Plus filler plate and filler hardware ACTFPKEB1P (TEB, dual mounted)	EDH-GEA-00889	1169
ACTFPKEB2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	1166
ACTFPKEB2P	primary	GEA	Spectra SCP Plus filler plate and filler hardware ACTFPKEB2P (TEB, dual mounted)	EDH-GEA-00891	1170
ACTFPKEB3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	1166
ACTFPKEB3P	primary	GEA	Spectra SCP Plus filler plate and filler hardware ACTFPKEB3P (TEB, dual mounted)	EDH-GEA-00893	1170
ACTFPKJD	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	1166
ACTFPKJD	primary	GEA	Spectra SCP Plus filler plate and filler hardware ACTFPKJD (TJD, dual mounted)	EDH-GEA-00901	1170
ACTFPKQD2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	1167
ACTFPKQD2P	primary	GEA	Spectra SCP Plus filler plate and filler hardware ACTFPKQD2P (TQD, dual mounted)	EDH-GEA-00897	1170
ACTFPKQD3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	1167
ACTFPKQD3P	primary	GEA	Spectra SCP Plus filler plate and filler hardware ACTFPKQD3P (TQD, dual mounted)	EDH-GEA-00899	1171
ACTFPKSE	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	1167
ACTFPKSE	primary	GEA	Spectra SCP Plus filler plate and filler hardware ACTFPKSE (SHE (SEH), dual moun	EDH-GEA-00887	1171
ACTFPKSF	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	1168
ACTFPKSF	primary	GEA	Spectra SCP Plus filler plate and filler hardware ACTFPKSF (TFK, dual mounted)	EDH-GEA-00895	1171
ACTFPKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	1168
ACTFPKSG	primary	GEA	Spectra SCP Plus filler plate and filler hardware ACTFPKSG (SGD, dual mounted)	EDH-GEA-00903	1171
ACTHKEB1P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	1165
ACTHKEB1P	primary	GEA	Spectra SCP Plus hardware to mount one breaker ACTHKEB1P (TEB, dual mounted)	EDH-GEA-00888	1182
ACTHKEB2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	1166
ACTHKEB2P	primary	GEA	Spectra SCP Plus hardware to mount one breaker ACTHKEB2P (TEB, dual mounted)	EDH-GEA-00890	1182
ACTHKEB3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	1166
ACTHKEB3P	primary	GEA	Spectra SCP Plus hardware to mount one breaker ACTHKEB3P (TEB, dual mounted)	EDH-GEA-00892	1182
ACTHKJD	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	1166
ACTHKJD	primary	GEA	Spectra SCP Plus hardware to mount one breaker ACTHKJD (TJD, dual mounted)	EDH-GEA-00900	1183
ACTHKQD2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	1167

Number	Type	Mfr	Description	Catalogue ID	Pg
ACTHKQD2P	primary	GEA	Spectra SCP Plus hardware to mount one breaker ACTHKQD2P (TQD, dual mounted)	EDH-GEA-00896	1183
ACTHKQD3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	1167
ACTHKQD3P	primary	GEA	Spectra SCP Plus hardware to mount one breaker ACTHKQD3P (TQD, dual mounted)	EDH-GEA-00898	1183
ACTHKSE	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	1167
ACTHKSE	primary	GEA	Spectra SCP Plus hardware to mount one breaker ACTHKSE (SHE (SEH), dual mounted)	EDH-GEA-00886	1183
ACTHKSF	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	1168
ACTHKSF	primary	GEA	Spectra SCP Plus hardware to mount one breaker ACTHKSF (TFK, dual mounted)	EDH-GEA-00894	1183
ACTHKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	1168
ACTHKSG	primary	GEA	Spectra SCP Plus hardware to mount one breaker ACTHKSG (SGD, dual mounted)	EDH-GEA-00902	1184
ACTMKEB1P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	1165
ACTMKEB2P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	1166
ACTMKEB3P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	1166
ACTMKJD	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	1166
ACTMKQD2P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	1167
ACTMKQD3P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	1167
ACTMKSE	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	1167
ACTMKSF	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	1168
ACTMKSG	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	1168
AEG10	primary	GEA	Spectra equipment ground kit AEG10	EDH-GEA-00236	1283
AEG21	primary	GEA	Spectra equipment ground kit AEG21	EDH-GEA-00237	1284
AEG21S	primary	GEA	Spectra equipment ground kit AEG21S	EDH-GEA-00238	1284
AEG31S	primary	GEA	Spectra equipment ground kit AEG31S	EDH-GEA-00239	1284
AEG47	primary	GEA	Spectra equipment ground kit AEG47	EDH-GEA-00240	1284
AEG47S	primary	GEA	Spectra equipment ground kit AEG47S	EDH-GEA-00241	1285
AFL120	primary	GEA	Spectra feed-thru lug cover plate kit AFL120	EDH-GEA-00243	1205
AFL600	primary	GEA	Spectra feed-thru lug cover plate kit AFL600	EDH-GEA-00242	1206
AFP10T	primary	GEA	Spectra ADS switch filler plate AFP10T	EDH-GEA-00501	1315
AFP10T44	primary	GEA	Spectra filler kit AFP10T44 for 400-600 A J/T fused switch in 44 in enclosure	EDH-GEA-00820	1315
AFP10X	primary	GEA	Spectra ADS switch filler plate AFP10X	EDH-GEA-00502	1316
AFP19X	primary	GEA	Spectra ADS switch filler plate AFP19X	EDH-GEA-00503	1316
AFP2FBD	primary	GEA	Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)	EDH-GEA-00131	1316
AFP2QDD	primary	GEA	Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)	EDH-GEA-00128	1317
AFP2TED	primary	GEA	Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)	EDH-GEA-00129	1317
AFP3ELD	primary	GEA	Spectra breaker filler plate kit AFP3ELD	EDH-GEA-00490	1317
AFP3EYD	primary	GEA	Spectra breaker filler plate kit AFP3EYD (TEY, dual)	EDH-GEA-00130	1318
AFP3FBD	primary	GEA	Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)	EDH-GEA-00132	1318
AFP3QBD	primary	GEA	Spectra breaker filler plate kit AFP3QBD	EDH-GEA-00495	1318

Number	Type	Mfr	Description	Catalogue ID	Pg
AFP3QDD	primary	GEA	Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)	EDH-GEA-00133	1319
AFP3SED	primary	GEA	Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, du	EDH-GEA-00134	1319
AFP3SFD	primary	GEA	Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)	EDH-GEA-00135	1320
AFP3SFS	primary	GEA	Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)	EDH-GEA-00139	1320
AFP3TED	primary	GEA	Spectra breaker filler plate kit AFP3TED	EDH-GEA-00489	1320
AFP3TFD	primary	GEA	Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)	EDH-GEA-00136	1321
AFP3TFS	primary	GEA	Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)	EDH-GEA-00140	1321
AFP4FGD	primary	GEA	Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)	EDH-GEA-00137	1321
AFP4FGS	primary	GEA	Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)	EDH-GEA-00141	1322
AFP4SED	primary	GEA	Spectra breaker filler plate kit AFP4SED	EDH-GEA-00488	1322
AFP4SFD	primary	GEA	Spectra breaker filler plate kit AFP4SFD	EDH-GEA-00491	1322
AFP4SFS	primary	GEA	Spectra breaker filler plate kit AFP4SFS	EDH-GEA-00492	1322
AFP4SGC	primary	GEA	Spectra breaker filler plate kit AFP4SGC	EDH-GEA-00496	1323
AFP4SGD	primary	GEA	Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)	EDH-GEA-00138	1323
AFP4SGS	primary	GEA	Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)	EDH-GEA-00142	1323
AFP4X	primary	GEA	Spectra ADS switch filler plate AFP4X	EDH-GEA-00504	1324
AFP5LCS	primary	GEA	Spectra breaker filler plate kit AFP5LCS (SKP, single)	EDH-GEA-00143	1324
AFP5X	primary	GEA	Spectra ADS switch filler plate AFP5X	EDH-GEA-00505	1324
AFP6SKS	primary	GEA	Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)	EDH-GEA-00144	1325
AFP6TJD	primary	GEA	Spectra breaker filler plate kit AFP6TJD	EDH-GEA-00494	1325
AFP6TJS	primary	GEA	Spectra breaker filler plate kit AFP6TJS	EDH-GEA-00493	1325
AFP7T	primary	GEA	Spectra ADS switch filler plate AFP7T	EDH-GEA-00506	1326
AFP7X	primary	GEA	Spectra ADS switch filler plate AFP7X	EDH-GEA-00508	1326
AFP7X2	primary	GEA	Spectra ADS switch filler plate AFP7X2	EDH-GEA-00507	1327
AFPML4X	primary	GEA	Spectra main lug module cover plate AFPML4X	EDH-GEA-00883	1327
AFPML6X	primary	GEA	Spectra main lug module cover plate AFPML6X	EDH-GEA-00884	1327
AFPML6XW	primary	GEA	Spectra main lug module cover plate AFPML6XW	EDH-GEA-00885	1328
AHEXLI	primary	SQD	Square D Handle extension, Q4 2/3-pole	EDH-SQD-00945	815
AHKBE1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)	EDH-GEA-00194	1338
AHKBF1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)	EDH-GEA-00195	1338
AHKBFB1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)	EDH-GEA-00200	1338
AHKBFD1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)	EDH-GEA-00198	1338
AHKBFG1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)	EDH-GEA-00199	1338
AHKBG1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)	EDH-GEA-00196	1339
AHKBQ1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)	EDH-GEA-00197	1339
AHKE1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKE1	EDH-GEA-00185	1339
AHKEL1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKEL1	EDH-GEA-00186	1340
AHKF1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKF1	EDH-GEA-00187	1340
AHKFD1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKFD1	EDH-GEA-00192	1341
AHKFG1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKFG1	EDH-GEA-00193	1341
AHKG1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKG1	EDH-GEA-00188	1341
AHKJ1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKJ1	EDH-GEA-00189	1342

Number	Type	Mfr	Description	Catalogue ID	Pg
AHKLB1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKLB1	EDH-GEA-00190	1342
AHKQ1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKQ1	EDH-GEA-00191	1343
AL1000MAT	primary	SQD	Square D control wire terminal / tapped lug (MA)	EDH-SQD-00500	1019
AL100FA	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FA	EDH-SQD-00452	1004
AL100FA4	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FC	EDH-SQD-00451	1004
AL100FD	primary	SQD	E-frame mechanical lug kit (3 lugs), 35-125 A (optional for 15-30 A)	EDH-SQD-00118	803
AL100TF	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FA	EDH-SQD-00453	1004
AL1200NE6T	primary	SQD	Square D control wire terminal / tapped lug (NA)	EDH-SQD-00501	1020
AL1200P24TK	primary	SQD	PowerPact P tapped (control-wire) lug kit 1200 A	EDH-SQD-00506	1050
AL1200P25TK	primary	SQD	PowerPact P tapped (control-wire) lug kit 1200 A	EDH-SQD-00507	1050
AL1200P25TK4	primary	SQD	PowerPact P tapped (control-wire) lug kit 1200 A	EDH-SQD-00508	1050
AL1200R53K	primary	SQD	Square D lug kit AL1200R53K (S33930 / R-frame)	EDH-SQD-00515	713
AL1200R53TK	primary	SQD	PowerPact R tapped (control-wire) lug kit 1200 A	EDH-SQD-00509	1051
AL150FA	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FA	EDH-SQD-00454	1005
AL150HD	primary	SQD	Standard aluminum mechanical lug kit AL150HD (HD/HG 15-150 A)	EDH-SQD-00302	713
AL175JD	primary	SQD	Standard aluminum mechanical lug kit AL175JD (JD/JG 150-175 A)	EDH-SQD-00303	714
AL250JD	primary	SQD	Standard aluminum mechanical lug kit AL250JD (JD/JG 200-250 A)	EDH-SQD-00304	715
AL250KA	primary	SQD	Square D KA mechanical lug kit (Al lugs) - KI	EDH-SQD-00455	1008
AL250KI	primary	SQD	Square D KA mechanical lug kit (Al lugs) - KI	EDH-SQD-00456	1008
AL250KIT	primary	SQD	Square D control wire terminal / tapped lug (KI)	EDH-SQD-00495	1010
AL30FD	primary	SQD	E-frame mechanical lug kit (3 lugs), 15-30 A	EDH-SQD-00117	803
AL400L61K3	primary	SQD	PowerPact L-frame 250 A mechanical lug kit, Al, 3P	EDH-SQD-00421	1034
AL400L61K4	primary	SQD	PowerPact L-frame 250 A mechanical lug kit, Al, 4P	EDH-SQD-00422	1035
AL400L6IK3	alias	SQD	PowerPact L-frame 250 A mechanical lug kit, Al, 3P	EDH-SQD-00421	1034
AL400LA	primary	SQD	Standard aluminum mechanical lug kit AL400LA (LA 125-400 A)	EDH-SQD-00305	715
AL400LAT	primary	SQD	Square D control wire terminal / tapped lug (Q4)	EDH-SQD-00496	1014
AL400LH7	primary	SQD	Square D LA mechanical lug kit (Al lugs) - Q4	EDH-SQD-00457	1011
AL50FA	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FA	EDH-SQD-00450	1005
AL600IN	primary	SQD	Square D LC/LI/LE/LX/LXI threaded terminal clip kit	EDH-SQD-00510	1018
AL600LF52K3	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (short shield, I-Line)	EDH-SQD-00425	1035
AL600LI35	primary	SQD	Square D LI mechanical lug kit (Al lugs) - LE	EDH-SQD-00458	1015
AL600LI35T	primary	SQD	Square D control wire terminal / tapped lug (LC)	EDH-SQD-00497	1018
AL600LI5	primary	SQD	Square D LI mechanical lug kit (Al lugs) - LI	EDH-SQD-00459	1015
AL600LI5T	primary	SQD	Square D control wire terminal / tapped lug (LC)	EDH-SQD-00498	1019
AL600LI7	primary	SQD	Square D LI mechanical lug kit (Al lugs) - LC	EDH-SQD-00460	1015
AL600LS52K3	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (medium shield)	EDH-SQD-00423	1035
AL600LS52K4	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Al, 4P (medium shield)	EDH-SQD-00424	1036
AL800M23K	primary	SQD	PowerPact M/P-frame 800 A mechanical lug kit, Al	EDH-SQD-00511	1048
AL800M23TK	primary	SQD	PowerPact M/P tapped (control-wire) lug kit 800 A	EDH-SQD-00502	1048
AL800M23TK4	primary	SQD	PowerPact M/P tapped (control-wire) lug kit 800 A	EDH-SQD-00504	1048
AL800P6TK	primary	SQD	PowerPact M/P tapped (control-wire) lug kit 800 A	EDH-SQD-00503	1049
AL800P6TK4	primary	SQD	PowerPact M/P tapped (control-wire) lug kit 800 A	EDH-SQD-00505	1049
AL800P7K	primary	SQD	PowerPact M/P-frame 800 A mechanical lug kit, Al (750 kcmil)	EDH-SQD-00512	1049
AL900MAT	primary	SQD	Square D control wire terminal / tapped lug (MA)	EDH-SQD-00499	1019
AMB2120CA	primary	GEA	Spectra main lug kit AMB2120CA	EDH-GEA-00530	1186
AMB2120CAF	equivalent	GEA	Spectra main lug kit AMB2120CA	EDH-GEA-00530	1186

Number	Type	Mfr	Description	Catalogue ID	Pg
AMB2120DCA	primary	GEA	Spectra main lug kit AMB2120DCA	EDH-GEA-00538	1186
AMB2120DCAF	equivalent	GEA	Spectra main lug kit AMB2120DCA	EDH-GEA-00538	1186
AMB2120DMA	primary	GEA	Spectra main lug kit AMB2120DMA	EDH-GEA-00518	1187
AMB2120DMAF	equivalent	GEA	Spectra main lug kit AMB2120DMA	EDH-GEA-00518	1187
AMB2120DMC	primary	GEA	Spectra main lug kit AMB2120DMC	EDH-GEA-00516	1187
AMB2120DMCF	equivalent	GEA	Spectra main lug kit AMB2120DMC	EDH-GEA-00516	1187
AMB2120DN	primary	GEA	Spectra main lug kit AMB2120DN	EDH-GEA-00522	1188
AMB2120DNF	equivalent	GEA	Spectra main lug kit AMB2120DN	EDH-GEA-00522	1188
AMB2120MA	primary	GEA	Spectra main lug kit AMB2120MA	EDH-GEA-00513	1188
AMB2120MAF	equivalent	GEA	Spectra main lug kit AMB2120MA	EDH-GEA-00513	1188
AMB2120N	primary	GEA	Spectra main lug kit AMB2120N	EDH-GEA-00520	1189
AMB2120NF	equivalent	GEA	Spectra main lug kit AMB2120N	EDH-GEA-00520	1189
AMB2250CA	primary	GEA	Spectra main lug kit AMB2250CA	EDH-GEA-00524	1189
AMB2250CAF	equivalent	GEA	Spectra main lug kit AMB2250CA	EDH-GEA-00524	1189
AMB2250DCA	primary	GEA	Spectra main lug kit AMB2250DCA	EDH-GEA-00532	1190
AMB2250DCAF	equivalent	GEA	Spectra main lug kit AMB2250DCA	EDH-GEA-00532	1190
AMB2600CA	primary	GEA	Spectra main lug kit AMB2600CA	EDH-GEA-00526	1190
AMB2600CAF	equivalent	GEA	Spectra main lug kit AMB2600CA	EDH-GEA-00526	1190
AMB2600DCA	primary	GEA	Spectra main lug kit AMB2600DCA	EDH-GEA-00534	1191
AMB2600DCAF	equivalent	GEA	Spectra main lug kit AMB2600DCA	EDH-GEA-00534	1191
AMB2600MA	primary	GEA	Spectra main lug kit AMB2600MA	EDH-GEA-00509	1191
AMB2600MAF	equivalent	GEA	Spectra main lug kit AMB2600MA	EDH-GEA-00509	1191
AMB2600MC	primary	GEA	Spectra main lug kit AMB2600MC	EDH-GEA-00511	1192
AMB2600MCF	equivalent	GEA	Spectra main lug kit AMB2600MC	EDH-GEA-00511	1192
AMB2800CA	primary	GEA	Spectra main lug kit AMB2800CA	EDH-GEA-00528	1192
AMB2800CAF	equivalent	GEA	Spectra main lug kit AMB2800CA	EDH-GEA-00528	1192
AMB2800DCA	primary	GEA	Spectra main lug kit AMB2800DCA	EDH-GEA-00536	1193
AMB2800DCAF	equivalent	GEA	Spectra main lug kit AMB2800DCA	EDH-GEA-00536	1193
AMB3120CA	primary	GEA	Spectra main lug kit AMB3120CA	EDH-GEA-00531	1193
AMB3120CAF	equivalent	GEA	Spectra main lug kit AMB3120CA	EDH-GEA-00531	1193
AMB3120DCA	primary	GEA	Spectra main lug kit AMB3120DCA	EDH-GEA-00539	1194
AMB3120DCAF	equivalent	GEA	Spectra main lug kit AMB3120DCA	EDH-GEA-00539	1194
AMB3120DMA	primary	GEA	Spectra main lug kit AMB3120DMA	EDH-GEA-00519	1194
AMB3120DMAF	equivalent	GEA	Spectra main lug kit AMB3120DMA	EDH-GEA-00519	1194
AMB3120DMC	primary	GEA	Spectra main lug kit AMB3120DMC	EDH-GEA-00517	1195
AMB3120DMCF	equivalent	GEA	Spectra main lug kit AMB3120DMC	EDH-GEA-00517	1195
AMB3120DN	primary	GEA	Spectra main lug kit AMB3120DN	EDH-GEA-00523	1195
AMB3120DNF	equivalent	GEA	Spectra main lug kit AMB3120DN	EDH-GEA-00523	1195
AMB3120MA	primary	GEA	Spectra main lug kit AMB3120MA	EDH-GEA-00514	1196
AMB3120MAF	equivalent	GEA	Spectra main lug kit AMB3120MA	EDH-GEA-00514	1196
AMB3120MC	primary	GEA	Spectra main lug kit AMB3120MC	EDH-GEA-00515	1196
AMB3120MCF	equivalent	GEA	Spectra main lug kit AMB3120MC	EDH-GEA-00515	1196
AMB3120N	primary	GEA	Spectra main lug kit AMB3120N	EDH-GEA-00521	1197
AMB3120NF	equivalent	GEA	Spectra main lug kit AMB3120N	EDH-GEA-00521	1197
AMB3250CA	primary	GEA	Spectra main lug kit AMB3250CA	EDH-GEA-00525	1197
AMB3250CAF	equivalent	GEA	Spectra main lug kit AMB3250CA	EDH-GEA-00525	1197
AMB3250DCA	primary	GEA	Spectra main lug kit AMB3250DCA	EDH-GEA-00533	1198
AMB3250DCAF	equivalent	GEA	Spectra main lug kit AMB3250DCA	EDH-GEA-00533	1198
AMB3600CA	primary	GEA	Spectra main lug kit AMB3600CA	EDH-GEA-00527	1198
AMB3600CAF	equivalent	GEA	Spectra main lug kit AMB3600CA	EDH-GEA-00527	1198
AMB3600DCA	primary	GEA	Spectra main lug kit AMB3600DCA	EDH-GEA-00535	1199
AMB3600DCAF	equivalent	GEA	Spectra main lug kit AMB3600DCA	EDH-GEA-00535	1199

Number	Type	Mfr	Description	Catalogue ID	Pg
AMB3600MA	primary	GEA	Spectra main lug kit AMB3600MA	EDH-GEA-00510	1199
AMB3600MAF	equivalent	GEA	Spectra main lug kit AMB3600MA	EDH-GEA-00510	1199
AMB3600MC	primary	GEA	Spectra main lug kit AMB3600MC	EDH-GEA-00512	1200
AMB3600MCF	equivalent	GEA	Spectra main lug kit AMB3600MC	EDH-GEA-00512	1200
AMB3800CA	primary	GEA	Spectra main lug kit AMB3800CA	EDH-GEA-00529	1200
AMB3800CAF	equivalent	GEA	Spectra main lug kit AMB3800CA	EDH-GEA-00529	1200
AMB3800DCA	primary	GEA	Spectra main lug kit AMB3800DCA	EDH-GEA-00537	1201
AMB3800DCAF	equivalent	GEA	Spectra main lug kit AMB3800DCA	EDH-GEA-00537	1201
AMC2FGM	alias	GEA	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00181	1250
AMC2FGMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00181	1250
AMC2FJ	alias	GEA	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00179	1250
AMC2FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00179	1250
AMC2FJFP1	alias	GEA	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00179	1250
AMC2FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00178	1251
AMC2FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00178	1251
AMC2FLS	alias	GEA	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00184	1252
AMC2FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00184	1252
AMC2GM	alias	GEA	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00182	1253
AMC2GMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00182	1253
AMC2JK	alias	GEA	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00180	1254
AMC2JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00180	1254
AMC2KM	alias	GEA	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00183	1254
AMC2KMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00183	1254
AMC3FGM	alias	GEA	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00162	1256
AMC3FGMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00162	1256
AMC3FJ	alias	GEA	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00160	1256
AMC3FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00160	1256
AMC3FJFP1	alias	GEA	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00160	1256
AMC3FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00159	1257
AMC3FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00159	1257
AMC3FLS	alias	GEA	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00165	1258
AMC3FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00165	1258
AMC3GM	alias	GEA	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00163	1258
AMC3GMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00163	1258

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC3JK	alias	GEA	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00161	1259
AMC3JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00161	1259
AMC3KM	alias	GEA	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00164	1260
AMC3KMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00164	1260
AMC4EB	alias	GEA	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	EDH-GEA-00167	1261
AMC4EBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	EDH-GEA-00167	1261
AMC4EBS	alias	GEA	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00176	1262
AMC4EBSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00176	1262
AMC4FDB	alias	GEA	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00166	1263
AMC4FDBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00166	1263
AMC4FDS	alias	GEA	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00175	1263
AMC4FDSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00175	1263
AMC4FGB	alias	GEA	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double br	EDH-GEA-00173	1264
AMC4FGBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double br	EDH-GEA-00173	1264
AMC4FJ	alias	GEA	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00171	1264
AMC4FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00171	1264
AMC4FJFP1	alias	GEA	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00171	1264
AMC4FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00170	1265
AMC4FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00170	1265
AMC4FLS	alias	GEA	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00177	1266
AMC4FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00177	1266
AMC4GB	alias	GEA	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00174	1267
AMC4GBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00174	1267
AMC4GBFP2	alias	GEA	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00174	1267
AMC4JK	alias	GEA	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00172	1267
AMC4JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00172	1267
AMC4QD	alias	GEA	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	EDH-GEA-00169	1268
AMC4QDFP	primary	GEA	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	EDH-GEA-00169	1268
AMC4SE	alias	GEA	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED;	EDH-GEA-00168	1269
AMC4SEFP	primary	GEA	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED;	EDH-GEA-00168	1269

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC6EB	alias	GEA	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SE	EDH-GEA-00149	1270
AMC6EBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SE	EDH-GEA-00149	1270
AMC6EBS	alias	GEA	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00157	1271
AMC6EBSFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00157	1271
AMC6EL	primary	GEA	Spectra plug-in breaker module AMC6EL (TEL)	EDH-GEA-00487	1272
AMC6EY	alias	GEA	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	EDH-GEA-00146	1272
AMC6EYFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	EDH-GEA-00146	1272
AMC6FB	alias	GEA	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double bra	EDH-GEA-00147	1273
AMC6FBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double bra	EDH-GEA-00147	1273
AMC6FDB	alias	GEA	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00148	1274
AMC6FDBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00148	1274
AMC6FDSPF	primary	GEA	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00156	1274
AMC6FDSPF	alias	GEA	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00156	1274
AMC6FGB	alias	GEA	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double br	EDH-GEA-00154	1275
AMC6FGBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double br	EDH-GEA-00154	1275
AMC6FJ	alias	GEA	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00152	1275
AMC6FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00152	1275
AMC6FJFP1	alias	GEA	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00152	1275
AMC6FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00151	1276
AMC6FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00151	1276
AMC6FLS	alias	GEA	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00158	1277
AMC6FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00158	1277
AMC6GB	alias	GEA	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00155	1277
AMC6GBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00155	1277
AMC6GBFP2	alias	GEA	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00155	1277
AMC6JK	alias	GEA	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00153	1278
AMC6JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00153	1278
AMC6QB	alias	GEA	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	EDH-GEA-00145	1279
AMC6QBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	EDH-GEA-00145	1279
AMC6QD	alias	GEA	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	EDH-GEA-00150	1280
AMC6QDFP	primary	GEA	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	EDH-GEA-00150	1280

Number	Type	Mfr	Description	Catalogue ID	Pg
AMCB2FGM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00119	1217
AMCB2FGMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00119	1217
AMCB2FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P singl	EDH-GEA-00117	1219
AMCB2FJ	primary	GEA	Spectra bolt-on breaker strap kit AMCB2FJ (SF/TF, DEH059)	EDH-GEA-00401	1218
AMCB2FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P singl	EDH-GEA-00117	1219
AMCB2FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P si	EDH-GEA-00118	1219
AMCB2FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P si	EDH-GEA-00118	1219
AMCB2GM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P singl	EDH-GEA-00120	1221
AMCB2GM	primary	GEA	Spectra bolt-on G-frame main/single-branch strap kit AMCB2GM (DEH060)	EDH-GEA-00403	1220
AMCB2GMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P singl	EDH-GEA-00120	1221
AMCB2KM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00126	1222
AMCB2KM	primary	GEA	Spectra bolt-on K-frame main strap kit AMCB2KM (DEH061)	EDH-GEA-00407	1221
AMCB2KMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00126	1222
AMCB3FGM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00123	1222
AMCB3FGMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00123	1222
AMCB3FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P singl	EDH-GEA-00121	1223
AMCB3FJ	primary	GEA	Spectra bolt-on breaker strap kit AMCB3FJ (SF/TF, DEH059)	EDH-GEA-00400	1223
AMCB3FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P singl	EDH-GEA-00121	1223
AMCB3FJFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPX	EDH-GEA-00551	1348
AMCB3FJFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPK	EDH-GEA-00552	1347
AMCB3FJFP	equivalent	OTH	Aftermarket bus connection kit BAMCB3FJGE (seller cross-ref to GEA AMCB3FJFP)	EDH-OTH-00046	1246
AMCB3FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P si	EDH-GEA-00122	1224
AMCB3FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P si	EDH-GEA-00122	1224
AMCB3GM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P singl	EDH-GEA-00124	1225
AMCB3GM	primary	GEA	Spectra bolt-on G-frame main/single-branch strap kit AMCB3GM (DEH060)	EDH-GEA-00404	1224
AMCB3GMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P singl	EDH-GEA-00124	1225
AMCB3GMFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPX	EDH-GEA-00555	1349
AMCB3GMFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPK	EDH-GEA-00556	1348
AMCB3GMFP	equivalent	OTH	Aftermarket bus connection kit BAMCB3GMGE (seller cross-ref to GEA AMCB3GMFP)	EDH-OTH-00047	1246
AMCB3KM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00127	1226
AMCB3KM	primary	GEA	Spectra bolt-on K-frame main strap kit AMCB3KM (DEH061)	EDH-GEA-00408	1226
AMCB3KMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00127	1226
AMCB3KMFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPX	EDH-GEA-00557	1350
AMCB3KMFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPK	EDH-GEA-00558	1349

Number	Type	Mfr	Description	Catalogue ID	Pg
AMCB3KMFP	equivalent	OTH	Aftermarket bus connection kit BAMCB35KMGE (seller cross-ref to GEA AMCB3KMFP)	EDH-OTH-00048	1246
AMCB3LB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	EDH-GEA-00125	1227
AMCB3LBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	EDH-GEA-00125	1227
AMCB4EB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	EDH-GEA-00098	1229
AMCB4EB	primary	GEA	Spectra bolt-on breaker strap kit AMCB4EB (TEB/TED/THED/SE, DEH047)	EDH-GEA-00398	1228
AMCB4EBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	EDH-GEA-00098	1229
AMCB4EY	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	EDH-GEA-00099	1230
AMCB4EY	primary	GEA	Spectra bolt-on TEY strap kit AMCB4EY (DEH062)	EDH-GEA-00409	1229
AMCB4EYFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	EDH-GEA-00099	1230
AMCB4FB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P	EDH-GEA-00100	1230
AMCB4FBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P	EDH-GEA-00100	1230
AMCB4FDB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00101	1231
AMCB4FDBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00101	1231
AMCB4FGB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00113	1231
AMCB4FGBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00113	1231
AMCB4FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	EDH-GEA-00109	1233
AMCB4FJ	primary	GEA	Spectra bolt-on breaker strap kit AMCB4FJ (SF/TF, DEH059)	EDH-GEA-00402	1232
AMCB4FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	EDH-GEA-00109	1233
AMCB4FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P du	EDH-GEA-00111	1233
AMCB4FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P du	EDH-GEA-00111	1233
AMCB4GB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	EDH-GEA-00114	1235
AMCB4GB	primary	GEA	Spectra bolt-on G-frame double-branch strap kit AMCB4GB (DEH40129)	EDH-GEA-00405	1234
AMCB4GBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	EDH-GEA-00114	1235
AMCB4QD	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	EDH-GEA-00102	1235
AMCB4QDFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	EDH-GEA-00102	1235
AMCB4SE	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SE	EDH-GEA-00103	1237
AMCB4SE	primary	GEA	Spectra bolt-on breaker strap kit AMCB4SE (TEB/TED/THED/SE, DEH047)	EDH-GEA-00397	1236
AMCB4SEFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SE	EDH-GEA-00103	1237
AMCB6EB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SE	EDH-GEA-00104	1238
AMCB6EB	primary	GEA	Spectra bolt-on breaker strap kit AMCB6EB (TEB/TED/THED/SE, DEH047)	EDH-GEA-00396	1238
AMCB6EBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SE	EDH-GEA-00104	1238

Number	Type	Mfr	Description	Catalogue ID	Pg
AMCB6EBFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPX	EDH-GEA-00547	1351
AMCB6EBFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPK	EDH-GEA-00548	1350
AMCB6EBFP	equivalent	OTH	Aftermarket bus connection kit BAMCB6EBGE (seller cross-ref to GEA AMCB6EBFP)	EDH-OTH-00049	1247
AMCB6EY	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	EDH-GEA-00105	1239
AMCB6EY	primary	GEA	Spectra bolt-on TEY strap kit AMCB6EY (DEH062)	EDH-GEA-00410	1239
AMCB6EYFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	EDH-GEA-00105	1239
AMCB6EYFP	equivalent	OTH	Aftermarket bus connection kit BAMCB6EYGE (seller cross-ref to GEA AMCB6EYFP)	EDH-OTH-00050	1247
AMCB6FB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P	EDH-GEA-00106	1240
AMCB6FBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P	EDH-GEA-00106	1240
AMCB6FDB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00107	1241
AMCB6FDBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00107	1241
AMCB6FGB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00115	1241
AMCB6FGBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00115	1241
AMCB6FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	EDH-GEA-00110	1242
AMCB6FJ	primary	GEA	Spectra bolt-on breaker strap kit AMCB6FJ (SF/TF, DEH059)	EDH-GEA-00399	1242
AMCB6FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	EDH-GEA-00110	1242
AMCB6FJFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPX	EDH-GEA-00549	1352
AMCB6FJFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPK	EDH-GEA-00550	1351
AMCB6FJFP	equivalent	OTH	Aftermarket bus connection kit BAMCB6FJGE (seller cross-ref to GEA AMCB6FJFP)	EDH-OTH-00052	1247
AMCB6FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P du	EDH-GEA-00112	1243
AMCB6FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P du	EDH-GEA-00112	1243
AMCB6GB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	EDH-GEA-00116	1244
AMCB6GB	primary	GEA	Spectra bolt-on G-frame double-branch strap kit AMCB6GB (DEH40129)	EDH-GEA-00406	1243
AMCB6GBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	EDH-GEA-00116	1244
AMCB6GBFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPX	EDH-GEA-00553	1353
AMCB6GBFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPK	EDH-GEA-00554	1352
AMCB6GBFP	equivalent	OTH	Aftermarket bus connection kit BAMCB6GBGE (seller cross-ref to GEA AMCB6GBFP)	EDH-OTH-00053	1248
AMCB6QD	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	EDH-GEA-00108	1245
AMCB6QD	primary	GEA	GE/ABB AMCB6QD	EDH-GEA-00567	1467
AMCB6QDFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	EDH-GEA-00108	1245
AMCB6QDFP	equivalent	OTH	Aftermarket bus connection kit BAMCB6QDGE (seller cross-ref to GEA AMCB6QDFP)	EDH-OTH-00051	1248
AMCB6TEDL	primary	GEA	Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter	EDH-GEA-00244	1328
AMK350	primary	GEA	Spectra mechanical lug kit AMK350 (#6-350 kcmil)	EDH-GEA-00852	1207
AMK500	primary	GEA	Spectra mechanical lug kit AMK500 (#2-500 kcmil)	EDH-GEA-00853	1207
AMK600	primary	GEA	Spectra mechanical lug kit AMK600 (#2-600 kcmil)	EDH-GEA-00854	1207
AMK750	primary	GEA	Spectra mechanical lug kit AMK750 (3/0-750 kcmil)	EDH-GEA-00855	1207

Number	Type	Mfr	Description	Catalogue ID	Pg
AMKP101	primary	GEA	Spectra compression (crimp) lug kit AMKP101 (1/0, 3-pack)	EDH-GEA-00856	1208
AMKP202	primary	GEA	Spectra compression (crimp) lug kit AMKP202 (2/0, 3-pack)	EDH-GEA-00858	1208
AMKP2101	primary	GEA	Spectra compression (crimp) lug kit AMKP2101 (1/0, 6-pack)	EDH-GEA-00857	1208
AMKP2202	primary	GEA	Spectra compression (crimp) lug kit AMKP2202 (2/0, 6-pack)	EDH-GEA-00859	1208
AMKP2250	primary	GEA	Spectra compression (crimp) lug kit AMKP2250 (250 kcmil, 6-pack)	EDH-GEA-00865	1209
AMKP2300	primary	GEA	Spectra compression (crimp) lug kit AMKP2300 (300 kcmil, 6-pack)	EDH-GEA-00867	1209
AMKP2303	primary	GEA	Spectra compression (crimp) lug kit AMKP2303 (3/0, 6-pack)	EDH-GEA-00861	1209
AMKP2350	primary	GEA	Spectra compression (crimp) lug kit AMKP2350 (350 kcmil, 6-pack)	EDH-GEA-00869	1209
AMKP2400	primary	GEA	Spectra compression (crimp) lug kit AMKP2400 (400 kcmil, 6-pack)	EDH-GEA-00871	1210
AMKP2404	primary	GEA	Spectra compression (crimp) lug kit AMKP2404 (4/0, 6-pack)	EDH-GEA-00863	1210
AMKP250	primary	GEA	Spectra compression (crimp) lug kit AMKP250 (250 kcmil, 3-pack)	EDH-GEA-00864	1210
AMKP2500	primary	GEA	Spectra compression (crimp) lug kit AMKP2500 (500 kcmil, 6-pack)	EDH-GEA-00873	1210
AMKP2600	primary	GEA	Spectra compression (crimp) lug kit AMKP2600 (600 kcmil, 6-pack)	EDH-GEA-00875	1211
AMKP2750	primary	GEA	Spectra compression (crimp) lug kit AMKP2750 (700/750 kcmil, 6-pack)	EDH-GEA-00877	1211
AMKP300	primary	GEA	Spectra compression (crimp) lug kit AMKP300 (300 kcmil, 3-pack)	EDH-GEA-00866	1211
AMKP303	primary	GEA	Spectra compression (crimp) lug kit AMKP303 (3/0, 3-pack)	EDH-GEA-00860	1211
AMKP350	primary	GEA	Spectra compression (crimp) lug kit AMKP350 (350 kcmil, 3-pack)	EDH-GEA-00868	1212
AMKP400	primary	GEA	Spectra compression (crimp) lug kit AMKP400 (400 kcmil, 3-pack)	EDH-GEA-00870	1212
AMKP404	primary	GEA	Spectra compression (crimp) lug kit AMKP404 (4/0, 3-pack)	EDH-GEA-00862	1212
AMKP500	primary	GEA	Spectra compression (crimp) lug kit AMKP500 (500 kcmil, 3-pack)	EDH-GEA-00872	1212
AMKP600	primary	GEA	Spectra compression (crimp) lug kit AMKP600 (600 kcmil, 3-pack)	EDH-GEA-00874	1213
AMKP750	primary	GEA	Spectra compression (crimp) lug kit AMKP750 (700/750 kcmil, 3-pack)	EDH-GEA-00876	1213
AML3120CFP	primary	GEA	Spectra main lug module AML3120CFP (1200 A compression)	EDH-GEA-00231	1201
AML3120FP	primary	GEA	Spectra main lug module AML3120FP (1200 A mechanical)	EDH-GEA-00226	1201
AML3250CFP	primary	GEA	Spectra main lug module AML3250CFP (250 A compression)	EDH-GEA-00227	1202
AML3250FP	primary	GEA	Spectra main lug module AML3250FP (250 A mechanical)	EDH-GEA-00220	1202
AML3250SFP	primary	GEA	Spectra main lug module AML3250SFP (250 A mechanical)	EDH-GEA-00219	1202
AML3250SFP1	alias	GEA	Spectra main lug module AML3250SFP (250 A mechanical)	EDH-GEA-00219	1202
AML3400CFP	primary	GEA	Spectra main lug module AML3400CFP (400 A compression)	EDH-GEA-00228	1203
AML3400FP	primary	GEA	Spectra main lug module AML3400FP (400 A mechanical)	EDH-GEA-00222	1203
AML3400SFP	primary	GEA	Spectra main lug module AML3400SFP (400 A mechanical)	EDH-GEA-00221	1203
AML3400SFP1	alias	GEA	Spectra main lug module AML3400SFP (400 A mechanical)	EDH-GEA-00221	1203
AML3600CFP	primary	GEA	Spectra main lug module AML3600CFP (600 A compression)	EDH-GEA-00229	1204
AML3600FP	primary	GEA	Spectra main lug module AML3600FP (600 A mechanical)	EDH-GEA-00224	1204
AML3600SFP	primary	GEA	Spectra main lug module AML3600SFP (600 A mechanical)	EDH-GEA-00223	1204
AML3600SFP1	alias	GEA	Spectra main lug module AML3600SFP (600 A mechanical)	EDH-GEA-00223	1204
AML3800CFP	primary	GEA	Spectra main lug module AML3800CFP (800 A compression)	EDH-GEA-00230	1205
AML3800FP	primary	GEA	Spectra main lug module AML3800FP (800 A mechanical)	EDH-GEA-00225	1205
ANK120D	primary	GEA	Spectra neutral kit ANK120D	EDH-GEA-00235	1282
ANK800D	primary	GEA	Spectra neutral kit ANK800D	EDH-GEA-00234	1282
ANKN120	primary	GEA	Spectra neutral kit ANKN120	EDH-GEA-00233	1282
ANKN400	primary	GEA	Spectra neutral kit ANKN400	EDH-GEA-00232	1283

Number	Type	Mfr	Description	Catalogue ID	Pg
APHBL	primary	GEA	A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	EDH-GEA-00084	1073
APHBQ	primary	GEA	A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	EDH-GEA-00083	1073
APN48	primary	GEA	A-Series Permanent circuit number kit, Nos 1-48	EDH-GEA-00093	1094
APN49	primary	GEA	Spectra permanent circuit marker kit APN49	EDH-GEA-00542	1371
APN84	primary	GEA	A-Series Permanent circuit number kit, Nos 43-84	EDH-GEA-00094	1094
APN99	primary	GEA	Spectra permanent circuit marker kit APN99	EDH-GEA-00543	1371
APP1	primary	GEA	Spectra blank filler plate 1X (36, 40 in box)	EDH-GEA-00202	1328
APP1S	primary	GEA	Spectra blank filler plate 1X (27, 31 in box)	EDH-GEA-00201	1329
APP1W	primary	GEA	Spectra blank filler plate 1X (44 in box)	EDH-GEA-00203	1329
APP2	primary	GEA	Spectra blank filler plate 2X (36, 40 in box)	EDH-GEA-00205	1330
APP2S	primary	GEA	Spectra blank filler plate 2X (27, 31 in box)	EDH-GEA-00204	1330
APP2W	primary	GEA	Spectra blank filler plate 2X (44 in box)	EDH-GEA-00206	1331
APP3	primary	GEA	Spectra blank filler plate 3X (36, 40 in box)	EDH-GEA-00208	1331
APP3S	primary	GEA	Spectra blank filler plate 3X (27, 31 in box)	EDH-GEA-00207	1332
APP3W	primary	GEA	Spectra blank filler plate 3X (44 in box)	EDH-GEA-00209	1332
APP4	primary	GEA	Spectra blank filler plate 4X (36, 40 in box)	EDH-GEA-00211	1333
APP4S	primary	GEA	Spectra blank filler plate 4X (27, 31 in box)	EDH-GEA-00210	1333
APP4W	primary	GEA	Spectra blank filler plate 4X (44 in box)	EDH-GEA-00212	1334
APP5	primary	GEA	Spectra blank filler plate 5X (36, 40 in box)	EDH-GEA-00214	1334
APP5S	primary	GEA	Spectra blank filler plate 5X (27, 31 in box)	EDH-GEA-00213	1335
APP5W	primary	GEA	Spectra blank filler plate 5X (44 in box)	EDH-GEA-00215	1335
APP6	primary	GEA	Spectra blank filler plate 6X (36, 40 in box)	EDH-GEA-00217	1336
APP6S	primary	GEA	Spectra blank filler plate 6X (27, 31 in box)	EDH-GEA-00216	1336
APP6W	primary	GEA	Spectra blank filler plate 6X (44 in box)	EDH-GEA-00218	1336
ASP25AD65KA	primary	GEA	A-Series AD 25 to 65 kAIC barrier kit	EDH-GEA-00087	1069
ASP2PTFJ3P	primary	GEA	A-Series 2P to 3P SF conversion kit for horizontal subfeed	EDH-GEA-00086	1074
ASP2PTQD3P	primary	GEA	A-Series 2P to 3P TQD conversion kit	EDH-GEA-00085	1074
ASPA23P	primary	GEA	ReliaGear lighting panel mounting kit ASPA23P (A2 3-pole, 225 A)	EDH-GEA-01051	1158
ASPAQLEBKT	primary	GEA	A-Series AQ/AL/AE rail bracket	EDH-GEA-00089	1069
ASPCORBNTEU1	primary	GEA	GE A-Series Corbin lock kit	EDH-GEA-00691	1094
ASPFB12P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	EDH-GEA-00038	1065
ASPFB3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	EDH-GEA-00039	1066
ASPFBRD3P	primary	GEA	ReliaGear lighting panel mounting kit ASPFBRD3P (FB 3-pole)	EDH-GEA-01050	1159
ASPFLUSHADJ	primary	GEA	GE front flush adjust kit	EDH-GEA-00694	1072
ASPP6EY12D	primary	GEA	A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole	EDH-GEA-00009	1097
ASPP6EY6D	primary	GEA	A-Series II power panel TEY three-phase circuit breaker kit, six-pole	EDH-GEA-00008	1097
ASPP6FB6D	primary	GEA	A-Series II power panel FB three-phase circuit breaker kit, six-pole	EDH-GEA-00005	1098
ASPP6QB12D	primary	GEA	A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole	EDH-GEA-00007	1098
ASPP6QB6D	primary	GEA	A-Series II power panel THQB three-phase circuit breaker kit, six-pole	EDH-GEA-00006	1099
ASPP6QD6D	primary	GEA	A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-br	EDH-GEA-00001	1099
ASPP6SE6D	primary	GEA	A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole	EDH-GEA-00002	1100
ASPP6SF3S	primary	GEA	A-Series II power panel SF three-phase circuit breaker kit, three-pole single	EDH-GEA-00003	1100

Number	Type	Mfr	Description	Catalogue ID	Pg
ASPP6SG3S	primary	GEA	A-Series II power panel SG three-phase circuit breaker kit, three-pole	EDH-GEA-00004	1101
ASPQTRK	primary	GEA	ReliaGear lighting panelboard flush cylinder quarter-turn lock kit ASPQTRK	EDH-GEA-01055	1160
ASPQTRT	primary	GEA	ReliaGear lighting panelboard t-handle quarter-turn lock kit ASPQTRT	EDH-GEA-01054	1161
ASPSERENT	primary	GEA	ReliaGear / A-Series service entrance field conversion kit ASPSERENT	EDH-GEA-01056	1161
ASPTED3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE	EDH-GEA-00036	1066
ASPTQD3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type TQD/THQD	EDH-GEA-00037	1066
ASPXT13P	primary	GEA	ReliaGear lighting panel mounting kit ASPXT13P (XT1 3-pole)	EDH-GEA-01052	1159
ASPXT23P	primary	GEA	ReliaGear lighting panel mounting kit ASPXT23P (XT2 3-pole)	EDH-GEA-01049	1159
ASPXT43P	primary	GEA	ReliaGear lighting panel mounting kit ASPXT43P (XT4 3-pole, 250 A)	EDH-GEA-01053	1160
ASPYALE47	primary	GEA	GE A-Series Yale lock kit	EDH-GEA-00690	1095
ATHMEGNDN	primary	GEA	Spectra TVSS neutral & ground wire kit ATHMEGNDN	EDH-GEA-00546	1353
B2016RD	primary	EAT	Series C R-frame copper rear connector	EDH-EAT-00533	658
B2016RDL	primary	EAT	Series C R-frame copper rear connector	EDH-EAT-00534	658
B2500RD	primary	EAT	Series C R-frame copper rear connector	EDH-EAT-00535	659
B74FLR	primary	SIE	74 in panelboard box (floor) accepting 26-74 in interiors	EDH-SIE-00396	1680
BAMCB35KMGE	primary	OTH	Aftermarket bus connection kit BAMCB35KMGE (seller cross-ref to GEA AMCB3KMFP)	EDH-OTH-00048	1246
BAMCB3FJGE	primary	OTH	Aftermarket bus connection kit BAMCB3FJGE (seller cross-ref to GEA AMCB3FJFP)	EDH-OTH-00046	1246
BAMCB3GMGE	primary	OTH	Aftermarket bus connection kit BAMCB3GMGE (seller cross-ref to GEA AMCB3GMFP)	EDH-OTH-00047	1246
BAMCB6EBGE	primary	OTH	Aftermarket bus connection kit BAMCB6EBGE (seller cross-ref to GEA AMCB6EBFP)	EDH-OTH-00049	1247
BAMCB6EYGE	primary	OTH	Aftermarket bus connection kit BAMCB6EYGE (seller cross-ref to GEA AMCB6EYFP)	EDH-OTH-00050	1247
BAMCB6FJGE	primary	OTH	Aftermarket bus connection kit BAMCB6FJGE (seller cross-ref to GEA AMCB6FJFP)	EDH-OTH-00052	1247
BAMCB6GBGE	primary	OTH	Aftermarket bus connection kit BAMCB6GBGE (seller cross-ref to GEA AMCB6GBFP)	EDH-OTH-00053	1248
BAMCB6QDGE	primary	OTH	Aftermarket bus connection kit BAMCB6QDGE (seller cross-ref to GEA AMCB6QDFP)	EDH-OTH-00051	1248
BBDPNEF10FPE	primary	OTH	Aftermarket bus connection kit BBDPNEF10FPE (seller cross-ref to FPE KBDP1C)	EDH-OTH-00006	1848
BBDPNEJFPE	primary	OTH	Aftermarket bus connection kit BBDPNEJFPE (seller cross-ref to FPE KBDP2C)	EDH-OTH-00007	1849
BBDPNJLFPE	primary	OTH	Aftermarket bus connection kit BBDPNJLFPE (seller cross-ref to FPE KBDP4C)	EDH-OTH-00008	1849
BBKB32	primary	SIE	P2/P3 BL/BQD 100A max twin-mount branch strap kit	EDH-SIE-00102	1483
BBKEB32	primary	SIE	P3 NEB/HEB 6-pole 3in branch breaker kit	EDH-SIE-00107	1507
BBKED32	primary	SIE	P2/P3 ED twin-mount branch strap kit	EDH-SIE-00104	1484
BBKGB32	primary	SIE	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	EDH-SIE-00106	1485
BBKNB32	primary	SIE	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	EDH-SIE-00105	1486
BBKQ1	primary	SIE	P2 QJ single-mount branch strap kit	EDH-SIE-00110	1488
BBKQ2	primary	SIE	P3 branch breaker kit for 2- and 3-pole QJ twin mount	EDH-SIE-00111	1508
BBKQR1	primary	SIE	P2 QR 225A max single-mount branch strap kit	EDH-SIE-00108	1488
BBKQR2	primary	SIE	P3 twin breaker mounting kit for QR	EDH-SIE-00109	1509
BBKQRP1FK	primary	SIE	P2 filler kit for QR	EDH-SIE-00080	1505
BBKQRP2FK	primary	SIE	P3 filler kit for QR	EDH-SIE-00081	1516
BBKVA4P2P3	primary	SIE	P2/P3 3VA41/xGB 125A max twin-mount strap kit	EDH-SIE-00103	1489
BBKVA5262P2HW	primary	SIE	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/	EDH-SIE-00113	1504

Number	Type	Mfr	Description	Catalogue ID	Pg
BBKVA5262P2S	primary	SIE	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	EDH-SIE-00112	1490
BBKVA5262S	alias	SIE	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	EDH-SIE-00112	1490
BBKVA52P3HW	primary	SIE	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting	EDH-SIE-00115	1514
BBKVA52P3HW	alias	SIE	P3 branch breaker hardware kit (catalog spelling; instruction sheet uses BBKVA52	EDH-SIE-00409	1515
BBKVA52P3T	primary	SIE	P3 strap kit	EDH-SIE-00114	1510
BBKVR52P3HW	primary	SIE	P3 branch breaker hardware kit (catalog spelling; instruction sheet uses BBKVA52	EDH-SIE-00409	1515
BCDPCACH	primary	OTH	Aftermarket bus connection kit BCDPCACH (seller cross-ref to EAT KCDPCA)	EDH-OTH-00029	82
BCDPFBCH	primary	OTH	Aftermarket bus connection kit BCDPFBCH (seller cross-ref to EAT KCDPFB150)	EDH-OTH-00028	82
BCDPKBCH	primary	OTH	Aftermarket bus connection kit BCDPKBCH (seller cross-ref to EAT KCDPKB)	EDH-OTH-00030	82
BCDPLACH	primary	OTH	Aftermarket bus connection kit BCDPLACH (seller cross-ref to EAT KCDPLA400)	EDH-OTH-00032	83
BCDPLBCH	primary	OTH	Aftermarket bus connection kit BCDPLBCH (seller cross-ref to EAT KCDPLB)	EDH-OTH-00031	83
BCDPLCCH	primary	OTH	Aftermarket bus connection kit BCDPLCCH (seller cross-ref to EAT KCDPLA600)	EDH-OTH-00033	83
BCDPMACH	primary	OTH	Aftermarket bus connection kit BCDPMACH (seller cross-ref to EAT KCDPMA)	EDH-OTH-00034	84
BCDPNBCH	primary	OTH	Aftermarket bus connection kit BCDPNBCH (seller cross-ref to EAT KCDPNB)	EDH-OTH-00035	84
BCDPNEF10FPE	primary	OTH	Aftermarket bus connection kit BCDPNEF10FPE (seller cross-ref to FPE KCDP1C)	EDH-OTH-00002	1853
BCDPNEJFPE	primary	OTH	Aftermarket bus connection kit BCDPNEJFPE (seller cross-ref to FPE KCDP2C)	EDH-OTH-00003	1854
BCDPNFJFPE	primary	OTH	Aftermarket bus connection kit BCDPNFJFPE (seller cross-ref to FPE KCDP3C)	EDH-OTH-00004	1854
BCDPNJLFPE	primary	OTH	Aftermarket bus connection kit BCDPNJLFPE (seller cross-ref to FPE KCDP4C)	EDH-OTH-00005	1855
BEDITE	primary	OTH	Aftermarket bus connection kit BEDITE (seller cross-ref to SIE 6E62)	EDH-OTH-00054	1713
BEDSITE	primary	OTH	Aftermarket bus connection kit BEDSITE (seller cross-ref to SIE SE6)	EDH-OTH-00061	1522
BFDITE	primary	OTH	Aftermarket bus connection kit BFDITE (seller cross-ref to SIE 6F62)	EDH-OTH-00056	1714
BFDSITE	primary	OTH	Aftermarket bus connection kit BFDSITE (seller cross-ref to SIE SF6)	EDH-OTH-00063	1522
BFJITE	primary	OTH	Aftermarket bus connection kit BFJITE (seller cross-ref to SIE 5FJ2)	EDH-OTH-00067	1714
BFP1WE	primary	OTH	Deadfront filler blank BFP1WE for Westinghouse CDP (1X)	EDH-OTH-00141	93
BFP2WE	primary	OTH	Deadfront filler blank BFP2WE for Westinghouse CDP (2X)	EDH-OTH-00142	93
BFP3WE	primary	OTH	Deadfront filler blank BFP3WE for Westinghouse CDP (3X)	EDH-OTH-00143	93
BHT	primary	EAT	Type BR loadcenter handle tie bar joining two adjacent single-pole type br break	EDH-EAT-00458	30
BINA	primary	EAT	Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)	EDH-EAT-00456	28
BJDITE	primary	OTH	Aftermarket bus connection kit BJDITE (seller cross-ref to SIE 6JJ62)	EDH-OTH-00058	1714
BJDSGLITE	primary	OTH	Aftermarket bus connection kit BJDSGLITE (seller cross-ref to SIE 6JJ61)	EDH-OTH-00057	1715
BJDSITE	primary	OTH	Aftermarket bus connection kit BJDSITE (seller cross-ref to SIE SJ1)	EDH-OTH-00064	1522
BJLITE	primary	OTH	Aftermarket bus connection kit BJLITE (seller cross-ref to SIE 5JJ2)	EDH-OTH-00066	1715
BK1	primary	SIE	Bonding kit for 250A max. and all P1 panels	EDH-SIE-00406	1515
BK1A	primary	SIE	Revised P1 bonding kit including service disconnect label	EDH-SIE-00096	1682

Number	Type	Mfr	Description	Catalogue ID	Pg
BLDITE	primary	OTH	Aftermarket bus connection kit BLDITE (seller cross-ref to SIE 6LL61)	EDH-OTH-00059	1716
BMDITE	primary	OTH	Aftermarket bus connection kit BMDITE (seller cross-ref to SIE SMND)	EDH-OTH-00060	1716
BMH1	primary	EAT	Eaton base mounting hardware, F-frame 3/4-pole	EDH-EAT-01331	556
BMH2	primary	EAT	Eaton base mounting hardware, J-frame	EDH-EAT-01332	573
BMH3	primary	EAT	Eaton base mounting hardware, K-frame	EDH-EAT-01333	608
BMH4	primary	EAT	Eaton base mounting hardware, L-frame	EDH-EAT-01334	628
BMH5	primary	EAT	Eaton base mounting hardware, M/N-frame	EDH-EAT-01335	643
BNDKT	primary	GEA	A-Series Service entrance kit 225 A	EDH-GEA-00081	1072
BNDKT6	primary	GEA	A-Series Service entrance kit 400/600 A	EDH-GEA-00082	1072
BNEHBSD	primary	OTH	Bus link replacements for Square D NEHB (3-pole, EH/EHB breakers)	EDH-OTH-00144	788
BNHB150GE	primary	OTH	Aftermarket bus connection kit BNHB150GE (seller cross-ref to GEA NHB150PK)	EDH-OTH-00036	1150
BNK2	primary	SIE	Neutral lug kit	EDH-SIE-00116	1491
BNK350N	primary	SIE	Neutral lug kit	EDH-SIE-00117	1483
BNKP2EX1	primary	SIE	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/G	EDH-SIE-00119	1491
Bottom H01 (no L/O), H02 (2 L/O), H03 (1 L/O RT), H04 (1 L/O LT); top H05, H07 (1 L/O RT), H08 (1 L/O LT)	style_number	EAT	PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X	EDH-EAT-00265	364
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	EAT	PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)	EDH-EAT-00260	363
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	EAT	PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)	EDH-EAT-00261	362
BPHCCH	primary	OTH	Aftermarket bus connection kit BPHCCH (seller cross-ref to EAT PH6C3)	EDH-OTH-00027	159
BPHECH	primary	OTH	Aftermarket bus connection kit BPHECH (seller cross-ref to EAT PH6E3)	EDH-OTH-00026	159
BPRL3AEDCH	primary	OTH	Aftermarket bus connection kit BPRL3AEDCH (seller cross-ref to EAT KPRL3AED3)	EDH-OTH-00010	325
BPRL3AFDCH	primary	OTH	Aftermarket bus connection kit BPRL3AFDCH (seller cross-ref to EAT KPRL3AFD3)	EDH-OTH-00009	325
BPRL4BEDCH	primary	OTH	Aftermarket bus connection kit BPRL4BEDCH (seller cross-ref to EAT KPRL4ED)	EDH-OTH-00022	429
BPRL4BFDCH	primary	OTH	Aftermarket bus connection kit BPRL4BFDCH (seller cross-ref to EAT KPRL4FD)	EDH-OTH-00021	429
BPRL4BJDSCH	primary	OTH	Aftermarket bus connection kit BPRL4BJDSCH (seller cross-ref to EAT KPRL4JDS)	EDH-OTH-00023	430
BPRL4BKDSCH	primary	OTH	Aftermarket bus connection kit BPRL4BKDSCH (seller cross-ref to EAT KPRL4KDS)	EDH-OTH-00024	430
BPRL4BLDSCH	primary	OTH	Aftermarket bus connection kit BPRL4BLDSCH (seller cross-ref to EAT KPRL4LDS)	EDH-OTH-00025	430
BPRLCACH	primary	OTH	Aftermarket bus connection kit BPRLCACH (seller cross-ref to EAT KPRL4CA)	EDH-OTH-00013	431
BPRLEDCH	primary	OTH	Aftermarket bus connection kit BPRLEDCH (seller cross-ref to EAT KPRL4ED)	EDH-OTH-00012	431
BPRLFDCH	primary	OTH	Aftermarket bus connection kit BPRLFDCH (seller cross-ref to EAT KPRL4FD)	EDH-OTH-00011	431
BPRLJDSCH	primary	OTH	Aftermarket bus connection kit BPRLJDSCH (seller cross-ref to EAT KPRL4JDS)	EDH-OTH-00015	432

Number	Type	Mfr	Description	Catalogue ID	Pg
BPRLJDTCH	primary	OTH	Aftermarket bus connection kit BPRLJDTCH (seller cross-ref to EAT KPRL4JDT)	EDH-OTH-00014	432
BPRLKDSCH	primary	OTH	Aftermarket bus connection kit BPRLKDSCH (seller cross-ref to EAT KPRL4KDS)	EDH-OTH-00017	432
BPRLKDTCH	primary	OTH	Aftermarket bus connection kit BPRLKDTCH (seller cross-ref to EAT KPRL4KDT)	EDH-OTH-00016	433
BPRLLDCH	primary	OTH	Aftermarket bus connection kit BPRLLDCH (seller cross-ref to EAT KPRL4LD)	EDH-OTH-00018	433
BPRLMDCH	primary	OTH	Aftermarket bus connection kit BPRLMDCH (seller cross-ref to EAT KPRL4MD)	EDH-OTH-00019	434
BPRLNDCH	primary	OTH	Aftermarket bus connection kit BPRLNDCH (seller cross-ref to EAT KPRL4ND)	EDH-OTH-00020	434
BQDHBD	primary	SIE	Siemens Handle blocking device for All BQD, CQD, GG, GB	EDH-SIE-00789	1695
BQDHT2	primary	SIE	Siemens Handle tie with padlock device for BQD, NGB, HGB, LGB	EDH-SIE-00779	1695
BQDHT3	primary	SIE	Siemens Handle tie with padlock device for BQD, NGB, HGB, LGB	EDH-SIE-00780	1696
BQDPLD	primary	SIE	Siemens Padlocking device (OFF) for All BQD, CQD, NGB, HGB, LGB	EDH-SIE-00782	1699
BQFS1K	equivalent	SIE	Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)	EDH-SIE-00252	1750
BQFS2	primary	SIE	Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)	EDH-SIE-00252	1750
BQJITE	primary	OTH	Aftermarket bus connection kit BQJITE (seller cross-ref to SIE 6QJ2)	EDH-OTH-00055	1717
BQJSITE	primary	OTH	Aftermarket bus connection kit BQJSITE (seller cross-ref to SIE SQJ)	EDH-OTH-00062	1523
BR2	primary	SIE	Siemens BQ/BQH/BQXD back mounting plate, 2P	EDH-SIE-00773	1682
BR3	primary	SIE	Siemens BQ/BQH/BQXD back mounting plate, 3P	EDH-SIE-00774	1682
BR4	primary	SIE	Siemens BQ/BQH/BQXD back mounting plate, 4P	EDH-SIE-00775	1683
Breaker-included versions: MBKVAM1300A, MBKVAM1400A, MBKVAH3300A, MBKVAH3400A, MBKVAM3300A, MBKVAM3400A	equivalent	SIE	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph	EDH-SIE-00011	1624
Breaker-included versions: MBKVAM3150A, MBKVAM3200A, MBKVAM3225A, MBKVAM3250A, MBKVAH3200A, MBKVAH3250A	equivalent	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A	EDH-SIE-00009	1623
Breaker-included versions: MBKVAM3150A, MBKVAM3200A, MBKVAM3225A, MBKVAM3250A, MBKVAH3200A, MBKVAH3250A	equivalent	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A	EDH-SIE-00010	1623
BRFP	primary	EAT	Type BR loadcenter filler plate (BRFP)	EDH-EAT-00454	29
BRL200	primary	EAT	Type BR loadcenter main lugs (BRL200)	EDH-EAT-00453	23
BRLW	primary	EAT	Type BR loadcenter padlockable handle lockoff for 1- (BRLW)	EDH-EAT-00459	31
BRLW1	primary	EAT	Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mo	EDH-EAT-00460	31
BRS225	primary	EAT	Type BR loadcenter main and subfeed lug block (BRS225)	EDH-EAT-00450	25
BRSF125	primary	EAT	Type BR loadcenter main and subfeed lug block (BRSF125)	EDH-EAT-00448	25
BRSF150	primary	EAT	Type BR loadcenter main and subfeed lug block (BRSF150)	EDH-EAT-00449	26
BSEBP4	primary	OTH	Aftermarket bus connection kit BSEBP4 (seller cross-ref to SIE SEB)	EDH-OTH-00065	1523

Number	Type	Mfr	Description	Catalogue ID	Pg
BSGDGE	primary	OTH	Aftermarket bus connection kit BSGDGE (seller cross-ref to GEA SG6DPK)	EDH-OTH-00043	1112
BSK4515	primary	OTH	Aftermarket bus connection kit BSK4515 (seller cross-ref to SQD SK4515)	EDH-OTH-00068	784
BSK4516	primary	OTH	Aftermarket bus connection kit BSK4516 (seller cross-ref to SQD SK4516)	EDH-OTH-00069	785
BSK4517	primary	OTH	Aftermarket bus connection kit BSK4517 (seller cross-ref to SQD SK4517)	EDH-OTH-00070	785
BSK4578	primary	OTH	Aftermarket bus connection kit BSK4578 (seller cross-ref to SQD SK4578)	EDH-OTH-00071	785
BTEDGE	primary	OTH	Aftermarket bus connection kit BTEDGE (seller cross-ref to GEA TED1DPK)	EDH-OTH-00037	1113
BTELGE	primary	OTH	Aftermarket bus connection kit BTELGE (seller cross-ref to GEA TEL1DPK)	EDH-OTH-00038	1113
BTFKGE	primary	OTH	Aftermarket bus connection kit BTFKGE (seller cross-ref to GEA TF2DPK)	EDH-OTH-00040	1113
BTJK4GE	primary	OTH	Aftermarket bus connection kit BTJK4GE (seller cross-ref to GEA TJ4DPK)	EDH-OTH-00041	1114
BTJK6GE	primary	OTH	Aftermarket bus connection kit BTJK6GE (seller cross-ref to GEA TJ6DPK)	EDH-OTH-00042	1114
BTK12GE	primary	OTH	Aftermarket bus connection kit BTK12GE (seller cross-ref to GEA TK12SPK)	EDH-OTH-00045	1114
BTK8GE	primary	OTH	Aftermarket bus connection kit BTK8GE (seller cross-ref to GEA TK8SPK)	EDH-OTH-00044	1115
BTQDGE	primary	OTH	Aftermarket bus connection kit BTQDGE (seller cross-ref to GEA TQ2DPK)	EDH-OTH-00039	1115
BWFP	primary	EAT	Type BR loadcenter filler plate for bw main circuit breaker space (with hardware	EDH-EAT-00455	29
BX2457	primary	EAT	PRL4 / PRL4X NEMA 1 box, 57 in high x 24 in wide x 10.40 in deep	EDH-EAT-01076	484
BX2457 G02; BX2473 G03; BX2490 G04; BX3673/BX4473 G05; BX3690/BX4490 G06	style_number	EAT	PRL4 vented cover assembly (side rails + top/bottom vented covers)	EDH-EAT-00298	470
BX2473	primary	EAT	PRL4 / PRL4X NEMA 1 box, 73 in high x 24 in wide x 10.40 in deep	EDH-EAT-01081	484
BX2490	primary	EAT	PRL4 / PRL4X NEMA 1 box, 90 in high x 24 in wide x 10.40 in deep	EDH-EAT-01086	484
BX3673	primary	EAT	PRL4 / PRL4X NEMA 1 box, 73 in high x 36 in wide x 10.40 in deep	EDH-EAT-01091	485
BX3690	primary	EAT	PRL4 / PRL4X NEMA 1 box, 90 in high x 36 in wide x 10.40 in deep	EDH-EAT-01096	485
BX4473	primary	EAT	PRL4 / PRL4X NEMA 1 box, 73 in high x 44 in wide x 10.40 in deep	EDH-EAT-01101	485
BX4490	primary	EAT	PRL4 / PRL4X NEMA 1 box, 90 in high x 44 in wide x 10.40 in deep	EDH-EAT-01105	485
BxxCVR	primary	SIE	Panelboard box extension cover (catalog pattern B<06-48><S|F>CVR)	EDH-SIE-00395	1844
CA1K	alias	OTH	Aftermarket bus connection kit BCDPCACH (seller cross-ref to EAT KCDPCA)	EDH-OTH-00029	82
CA4K	alias	OTH	Aftermarket bus connection kit BPRLCACH (seller cross-ref to EAT KPRL4CA)	EDH-OTH-00013	431
CBA3121F	primary	GEA	GE CCB replacement front CBA3121F (flush, 31 x 9 1/2 in box, 15X)	EDH-GEA-01022	1131
CBA3121S	primary	GEA	GE CCB replacement front CBA3121S (surface, 31 x 9 1/2 in box, 15X)	EDH-GEA-01021	1131
CBA3124F	primary	GEA	GE CCB replacement front CBA3124F (flush, 31 x 9 1/2 in box, 18X)	EDH-GEA-01024	1131
CBA3124S	primary	GEA	GE CCB replacement front CBA3124S (surface, 31 x 9 1/2 in box, 18X)	EDH-GEA-01023	1131

Number	Type	Mfr	Description	Catalogue ID	Pg
CBA3127F	primary	GEA	GE CCB replacement front CBA3127F (flush, 31 x 9 1/2 in box, 21X)	EDH-GEA-01026	1131
CBA3127S	primary	GEA	GE CCB replacement front CBA3127S (surface, 31 x 9 1/2 in box, 21X)	EDH-GEA-01025	1131
CBA3130F	primary	GEA	GE CCB replacement front CBA3130F (flush, 31 x 9 1/2 in box, 24X)	EDH-GEA-01028	1132
CBA3130S	primary	GEA	GE CCB replacement front CBA3130S (surface, 31 x 9 1/2 in box, 24X)	EDH-GEA-01027	1132
CBA3136F	primary	GEA	GE CCB replacement front CBA3136F (flush, 31 x 9 1/2 in box, 30X)	EDH-GEA-01030	1132
CBA3136S	primary	GEA	GE CCB replacement front CBA3136S (surface, 31 x 9 1/2 in box, 30X)	EDH-GEA-01029	1132
CBA3148F	primary	GEA	GE CCB replacement front CBA3148F (flush, 31 x 9 1/2 in box, 42X)	EDH-GEA-01032	1132
CBA3148S	primary	GEA	GE CCB replacement front CBA3148S (surface, 31 x 9 1/2 in box, 42X)	EDH-GEA-01031	1132
CBA3542F	primary	GEA	GE CCB replacement front CBA3542F (flush, 35 x 11 1/2 in box, 36X)	EDH-GEA-01034	1133
CBA3542S	primary	GEA	GE CCB replacement front CBA3542S (surface, 35 x 11 1/2 in box, 36X)	EDH-GEA-01033	1133
CBA4027F	primary	GEA	GE CCB replacement front CBA4027F (flush, 40 x 11 1/2 in box, 21X)	EDH-GEA-01036	1133
CBA4027S	primary	GEA	GE CCB replacement front CBA4027S (surface, 40 x 11 1/2 in box, 21X)	EDH-GEA-01035	1133
CBA4030F	primary	GEA	GE CCB replacement front CBA4030F (flush, 40 x 11 1/2 in box, 24X)	EDH-GEA-01038	1133
CBA4030S	primary	GEA	GE CCB replacement front CBA4030S (surface, 40 x 11 1/2 in box, 24X)	EDH-GEA-01037	1133
CBA4036F	primary	GEA	GE CCB replacement front CBA4036F (flush, 40 x 11 1/2 in box, 30X)	EDH-GEA-01040	1134
CBA4036S	primary	GEA	GE CCB replacement front CBA4036S (surface, 40 x 11 1/2 in box, 30X)	EDH-GEA-01039	1134
CBA4039F	primary	GEA	GE CCB replacement front CBA4039F (flush, 40 x 11 1/2 in box, 33X)	EDH-GEA-01042	1134
CBA4039S	primary	GEA	GE CCB replacement front CBA4039S (surface, 40 x 11 1/2 in box, 33X)	EDH-GEA-01041	1134
CBA4042F	primary	GEA	GE CCB replacement front CBA4042F (flush, 40 x 11 1/2 in box, 36X)	EDH-GEA-01044	1134
CBA4042S	primary	GEA	GE CCB replacement front CBA4042S (surface, 40 x 11 1/2 in box, 36X)	EDH-GEA-01043	1134
CBA4045F	primary	GEA	GE CCB replacement front CBA4045F (flush, 40 x 11 1/2 in box, 39X)	EDH-GEA-01046	1135
CBA4045S	primary	GEA	GE CCB replacement front CBA4045S (surface, 40 x 11 1/2 in box, 39X)	EDH-GEA-01045	1135
CCA4K	primary	EAT	Challenger twin mounting hardware kit CCA4K, 225 A max, 240 V	EDH-EAT-00766	107
CCBBLANK	primary	GEA	GE CCB 3-pole blanks	EDH-GEA-00609	1128
CCBFP1	primary	GEA	CCB panelboard filler plate 1X	EDH-GEA-00267	1128
CCBFP3	primary	GEA	CCB panelboard filler plate 3X	EDH-GEA-00268	1128
CCBFP3	alias	GEA	GE CCB/AV filler plate GAVFP3 (3X) - per seller listing	EDH-GEA-00612	1129
CCBFP5	primary	GEA	CCB panelboard filler plate 5X	EDH-GEA-00269	1128
CCE125	primary	SIE	Siemens CCE125 compression lug, ED 15-125A	EDH-SIE-00263	1759
CCF250	primary	SIE	Siemens CCF250 compression lug, FD	EDH-SIE-00267	1768
CCL600	primary	SIE	Siemens CCL600 compression lug, JD/LD	EDH-SIE-00274	1774
CCM800	primary	SIE	MD frame compression lug kit (1/0-500 kcmil)	EDH-SIE-00507	1791
CCM800K2	primary	SIE	Siemens CCM800K2 compression lug kit, MD 2-pole	EDH-SIE-00290	1791
CCM800K3	primary	SIE	Siemens CCM800K3 compression lug kit, MD 3-pole	EDH-SIE-00291	1791
CCN1200	primary	SIE	ND frame 1200A compression lug kit	EDH-SIE-00664	1801
CCN1200K2	primary	SIE	Siemens CCN1200K2 compression lug kit, ND 2-pole	EDH-SIE-00292	1802

Number	Type	Mfr	Description	Catalogue ID	Pg
CCN1200K3	primary	SIE	Siemens CCN1200K3 compression lug kit, ND 3-pole	EDH-SIE-00293	1802
CCPB-n-xxCF	primary	EAT	Bussmann CCPB ampacity-rejecting branch disconnect (catalog pattern CCPB-<poles>	EDH-EAT-00886	418
CCQ225	primary	SIE	QJ frame compression lug kit	EDH-SIE-00666	1755
CCQ250	primary	SIE	Siemens CCQ250 compression lug, QR2	EDH-SIE-00255	1758
CD55JJ2	primary	SIE	ITE CDP pre-Series 5 J-frame hardware kit, 2-3/4 in rise	EDH-SIE-00434	1470
CD62JJ2	primary	SIE	ITE CDP mounting hardware for JJ3/JL3/HJL3	EDH-SIE-00435	1470
CDP525-FD63BT	primary	SIE	ITE CDP 5.25 in deep panelboard twin hardware kit, FD63B	EDH-SIE-00436	1470
CDP525-FJ3B	primary	SIE	ITE CDP 5.25 in deep panelboard hardware kit, FJ3B200	EDH-SIE-00437	1470
CDP525-FJ3BT	primary	SIE	ITE CDP 5.25 in deep panelboard twin hardware kit, FJ3B200	EDH-SIE-00438	1471
CDP71PHED4	primary	SIE	ITE CDP mounting hardware for HED breakers	EDH-SIE-00439	1471
CDP7BQ3	primary	SIE	Siemens/ITE CDP-7 3-pole BQ hardware	EDH-SIE-00440	1471
CDP7MBKQJ3	primary	SIE	CDP-7 panelboard 3-phase QJ main/sub-feed breaker kit, 225 A	EDH-SIE-00441	1469
CDPEDT	primary	OTH	IEM CDP Type; ED Breaker; Twin; Mounting Hardware Kit	EDH-OTH-00135	1891
CDPFDZBRACKET	primary	OTH	IEM IEM 'Z' Bracket for FD/HFD Breaker	EDH-OTH-00140	1893
CDPFJ3	primary	SIE	Mounting hardware for FJ3 breaker in CDP panelboard (twin, 225 A)	EDH-SIE-00430	1717
CDPKDT	primary	OTH	IEM CDP Type; KD Breaker; Twin; Mounting Hardware Kit	EDH-OTH-00136	1892
CDPSGS	primary	OTH	IEM CDP Type; SG Breaker; 400A; Single	EDH-OTH-00137	1892
CDPSGT	primary	OTH	IEM CDP Type; SG Breaker; Twin	EDH-OTH-00138	1892
CDPTEDT	primary	OTH	IEM CDP Type; TED Breaker; Twin; Mounting Hardware Kit	EDH-OTH-00133	1892
CDPTHEDT	primary	OTH	IEM CDP Type; THED Breaker; Twin; Mounting Hardware Kit	EDH-OTH-00134	1892
CDPTJJS	primary	OTH	IEM CDP Type; TJJ Breaker; Single	EDH-OTH-00139	1893
CED3K	primary	EAT	Challenger twin mounting hardware kit CED3K, 225 A max, 600 V	EDH-EAT-00767	108
CED4BK	primary	EAT	Challenger twin (PM4b) mounting hardware kit CED4BK, 225 A max, 600 V	EDH-EAT-00769	108
CED4K	primary	EAT	Challenger twin mounting hardware kit CED4K, 225 A max, 240 V	EDH-EAT-00768	108
CED6	alias	SIE	6CLE2 connecting strap kit - CED (3.75in, twin)	EDH-SIE-00155	1563
CF16KF63C	primary	SQD	OEM QED-2 I-Line interior CF16KF63C	EDH-SQD-00519	995
CF16RJ63C36	primary	SQD	OEM QED-2 I-Line switchboard interior CF16RJ63C36	EDH-SQD-00378	996
CF20R63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF20R63C	EDH-SQD-00374	996
CF20RJ63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF20RJ63C	EDH-SQD-00376	996
CF25R63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF25R63C	EDH-SQD-00375	996
CF30RJ63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF30RJ63C	EDH-SQD-00377	997
CFD3K	primary	EAT	Challenger twin mounting hardware kit CFD3K, 150 A max, 600 V	EDH-EAT-00770	108
CFD4BK	primary	EAT	Challenger twin mounting hardware kit CFD4BK, 150 A max, 600 V	EDH-EAT-00772	109
CFD4K	primary	EAT	Challenger twin mounting hardware kit CFD4K, 150 A max, 600 V	EDH-EAT-00771	109
CH9CP	primary	EAT	Cutler-Hammer CH/CHB breaker filler (cover) plate for PB and PH panelboards	EDH-EAT-00924	156
Chassis height 14X G01; 23X G02; 31X G03; 40X G04; 53X G05	style_number	EAT	PRL3a/3X deadfront assembly frame (rails and end covers)	EDH-EAT-00254	369
CJD4K	primary	EAT	Challenger twin mounting hardware kit CJD4K, 250 A max, 600 V	EDH-EAT-00773	109
CJDS4BK	primary	EAT	Challenger single mounting hardware kit CJDS4BK, 250 A max, 600 V	EDH-EAT-00775	109
CJDS4K	primary	EAT	Challenger listed 'twin' (name suggests single) mounting hardware kit CJDS4K, 25	EDH-EAT-00774	110
CKD4K	primary	EAT	Challenger PM4a (no further description) mounting hardware kit CKD4K	EDH-EAT-00776	110

Number	Type	Mfr	Description	Catalogue ID	Pg
CKDS4BK	primary	EAT	Challenger single mounting hardware kit CKDS4BK, 400 A max, 600 V	EDH-EAT-00778	110
CKDS4K	primary	EAT	Challenger single mounting hardware kit CKDS4K, 400 A max, 600 V	EDH-EAT-00777	110
CLD4K	primary	EAT	Challenger single mounting hardware kit CLD4K, 600 A max, 600 V	EDH-EAT-00779	111
CLDS4BK	primary	EAT	Challenger single mounting hardware kit CLDS4BK, 600 A max, 600 V	EDH-EAT-00780	111
CLRSJL2	primary	SIE	Current-limiting JD/LD rear-stud end shield assembly, 2-pole	EDH-SIE-00488	1781
CLRSJL3	primary	SIE	Siemens CLRSJL3 rear-stud shield kit, CJD/SCJD/CLD/SCLD	EDH-SIE-00313	1779
CMD4K	primary	EAT	Challenger single mounting hardware kit CMD4K, 800 A max, 600 V	EDH-EAT-00781	111
CND4K	primary	EAT	Challenger single mounting hardware kit CND4K, 1200 A max, 600 V	EDH-EAT-00782	111
CNLK30A	supersedes	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	1642
CNLK30A	primary	SIE	Revised P1-250 copper neutral lug kit, 30-circuit (250 A, Cu cable only)	EDH-SIE-00314	1642
CNLK42A	supersedes	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	1642
CNLK42A	primary	SIE	Revised P1-250 copper neutral lug kit, 42-circuit (250 A, Cu cable only)	EDH-SIE-00315	1642
CNLK42B	primary	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	1642
CNLK54A	supersedes	SIE	RP1 CU neutral lug kit 54B	EDH-SIE-00039	1643
CNLK54A	primary	SIE	Revised P1-250 copper neutral lug kit, 54-circuit (250 A, Cu cable only)	EDH-SIE-00316	1643
CNLK54B	primary	SIE	RP1 CU neutral lug kit 54B	EDH-SIE-00039	1643
Controller 5X H01; Expansion 7X H02, 16X H03	style_number	EAT	PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover	EDH-EAT-00279	366
CQDA1	primary	SIE	Siemens CQD-series accessory module: Auxiliary switch 1A-1B, 240 Vac / 125 Vdc	EDH-SIE-00805	1689
CQDA1BA	primary	SIE	Siemens CQD-series accessory module: Alarm and auxiliary switch combination (bui	EDH-SIE-00809	1689
CQDA2	primary	SIE	Siemens CQD-series accessory module: Auxiliary switch 2A-2B, 240 Vac / 125 Vdc	EDH-SIE-00806	1690
CQDBA	primary	SIE	Siemens CQD-series accessory module: Alarm switch, 240 Vac / 125 Vdc	EDH-SIE-00807	1690
CQDFMB1	primary	SIE	CQD face mounting bracket, 1-pole	EDH-SIE-00529	1751
CQDFMB2	primary	SIE	CQD face mounting bracket, 2-pole	EDH-SIE-00530	1751
CQDFMB3	primary	SIE	CQD face mounting bracket, 3-pole	EDH-SIE-00531	1751
CQDSMK	primary	SIE	CQD breaker screw mounting kit	EDH-SIE-00528	1751
CQDST12	primary	SIE	Siemens CQD-series accessory module: Shunt trip 12 Vdc	EDH-SIE-00801	1690
CQDST120	primary	SIE	Siemens CQD-series accessory module: Shunt trip 120 Vac	EDH-SIE-00796	1691
CQDST120AAS	primary	SIE	Siemens CQD-series accessory module: Shunt trip 120 Vac + auxiliary switch combi	EDH-SIE-00808	1691
CQDST125	primary	SIE	Siemens CQD-series accessory module: Shunt trip 125 Vdc	EDH-SIE-00804	1691
CQDST24	primary	SIE	Siemens CQD-series accessory module: Shunt trip 24 Vdc	EDH-SIE-00802	1692
CQDST240	primary	SIE	Siemens CQD-series accessory module: Shunt trip 240 Vac (built to order)	EDH-SIE-00797	1692
CQDST277	primary	SIE	Siemens CQD-series accessory module: Shunt trip 277 Vac (built to order)	EDH-SIE-00798	1692
CQDST48	primary	SIE	Siemens CQD-series accessory module: Shunt trip 48 Vdc	EDH-SIE-00803	1693
CQDST480	primary	SIE	Siemens CQD-series accessory module: Shunt trip 480 Vac (built to order)	EDH-SIE-00799	1693
CQDST600	primary	SIE	Siemens CQD-series accessory module: Shunt trip 600 Vac	EDH-SIE-00800	1693
CS3637R	primary	SIE	MD/ND frame panelboard connector strap (OEM panel builder)	EDH-SIE-00495	1598
CS3638R	primary	SIE	MD/ND frame panelboard connector strap (OEM panel builder)	EDH-SIE-00496	1598
CS3639R	primary	SIE	MD/ND frame panelboard connector strap (OEM panel builder)	EDH-SIE-00497	1599
CU100FA	primary	SQD	Square D FA mechanical lug kit (Cu lugs) - FA	EDH-SQD-00462	1005

Number	Type	Mfr	Description	Catalogue ID	Pg
CU100FD	primary	SQD	E-frame copper mechanical lug kit (3 lugs), 15-125 A	EDH-SQD-00119	804
CU100TF	primary	SQD	Square D FA mechanical lug kit (Cu lugs) - FA	EDH-SQD-00463	1006
CU1200R53K	primary	SQD	Square D lug kit CU1200R53K (S33930 / R-frame)	EDH-SQD-00516	716
CU150HD	primary	SQD	Optional copper mechanical lug kit CU150HD (HD/HG 15-150 A)	EDH-SQD-00306	716
CU250JD	primary	SQD	Optional copper mechanical lug kit CU250JD (JD/JG 150-250 A)	EDH-SQD-00307	717
CU250KA	primary	SQD	Square D KA mechanical lug kit (Cu lugs) - KI	EDH-SQD-00464	1009
CU30FA4	primary	SQD	Square D FA mechanical lug kit (Cu lugs) - FC	EDH-SQD-00461	1006
CU400L61K3	primary	SQD	PowerPact L-frame 250/400 A mechanical lug kit, Cu, 3P	EDH-SQD-00426	1036
CU400L61K4	primary	SQD	PowerPact L-frame 250/400 A mechanical lug kit, Cu, 4P	EDH-SQD-00427	1036
CU400LA	primary	SQD	Optional copper mechanical lug kit CU400LA (LA 125-400 A)	EDH-SQD-00308	717
CU600LF52K3	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P	EDH-SQD-00430	1037
CU600LI35	primary	SQD	Square D LI mechanical lug kit (Cu lugs) - LI	EDH-SQD-00465	1016
CU600LI5	primary	SQD	Square D LI mechanical lug kit (Cu lugs) - LI	EDH-SQD-00466	1016
CU600LI7	primary	SQD	Square D LI mechanical lug kit (Cu lugs) - LI	EDH-SQD-00467	1016
CU600LS52K3	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P	EDH-SQD-00428	1037
CU600LS52K4	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 4P	EDH-SQD-00429	1037
CU-NFJ	primary	OTH	Frank Adam hardware kit CU-NFJ (copper, for NFJ breakers? - inferred)	EDH-OTH-00001	1891
CVC100FA	primary	SQD	Square D FA Cu compression lug kit	EDH-SQD-00482	1006
CVC250KA3	primary	SQD	Square D KA Cu compression lug kit	EDH-SQD-00483	1009
CVC400LA3	primary	SQD	Square D LA Cu compression lug kit	EDH-SQD-00484	1011
CVC400LA5	primary	SQD	Square D LA Cu compression lug kit	EDH-SQD-00485	1011
CVC600LI5	primary	SQD	Square D LI Cu compression lug kit	EDH-SQD-00486	1017
CYA060HD	primary	SQD	PowerPact H-frame Cu compression lug kit	EDH-SQD-00408	1022
CYA150HD	primary	SQD	PowerPact H-frame Cu compression lug kit	EDH-SQD-00409	1023
CYA150JD	primary	SQD	PowerPact J-frame Cu compression lug kit	EDH-SQD-00410	1028
CYA250J3	primary	SQD	PowerPact J-frame Cu compression lug kit	EDH-SQD-00411	1029
CYA400L31K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00412	1038
CYA400L31K4	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00417	1038
CYA400L51K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00414	1038
CYA400L51K4	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00419	1039
CYA400L71K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00416	1039
CYA600L32K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00413	1039
CYA600L32K4	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00418	1040
CYA600L52K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00415	1040
CYA600L52K4	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00420	1040
DACB3539	primary	GEA	GE CCB replacement panelboard box DACB3539 (35 x 11 1/2 in, 33X)	EDH-GEA-01011	1136
DACB3545	primary	GEA	GE CCB replacement panelboard box DACB3545 (35 x 11 1/2 in, 39X)	EDH-GEA-01012	1136
DACB4027	primary	GEA	GE CCB replacement panelboard box DACB4027 (40 x 11 1/2 in, 21X)	EDH-GEA-01013	1136
DACB4030	primary	GEA	GE CCB replacement panelboard box DACB4030 (40 x 11 1/2 in, 24X)	EDH-GEA-01014	1136
DACB4033	primary	GEA	GE CCB replacement panelboard box DACB4033 (40 x 11 1/2 in, 27X)	EDH-GEA-01015	1136
DACB4036	primary	GEA	GE CCB replacement panelboard box DACB4036 (40 x 11 1/2 in, 30X)	EDH-GEA-01016	1136
DACB4039	primary	GEA	GE CCB replacement panelboard box DACB4039 (40 x 11 1/2 in, 33X)	EDH-GEA-01017	1137
DACB4042	primary	GEA	GE CCB replacement panelboard box DACB4042 (40 x 11 1/2 in, 36X)	EDH-GEA-01018	1137
DACB4045	primary	GEA	GE CCB replacement panelboard box DACB4045 (40 x 11 1/2 in, 39X)	EDH-GEA-01019	1137

Number	Type	Mfr	Description	Catalogue ID	Pg
DACB4048	primary	GEA	GE CCB replacement panelboard box DACB4048 (40 x 11 1/2 in, 42X)	EDH-GEA-01020	1137
DASW3121	primary	GEA	GE CCB replacement panelboard box DASW3121 (31 x 9 1/2 in, 15X)	EDH-GEA-01005	1137
DASW3127	primary	GEA	GE CCB replacement panelboard box DASW3127 (31 x 9 1/2 in, 21X)	EDH-GEA-01006	1137
DASW3130	primary	GEA	GE CCB replacement panelboard box DASW3130 (31 x 9 1/2 in, 24X)	EDH-GEA-01007	1138
DASW3133	primary	GEA	GE CCB replacement panelboard box DASW3133 (31 x 9 1/2 in, 27X)	EDH-GEA-01008	1138
DASW3136	primary	GEA	GE CCB replacement panelboard box DASW3136 (31 x 9 1/2 in, 30X)	EDH-GEA-01009	1138
DASW3142	primary	GEA	GE CCB replacement panelboard box DASW3142 (31 x 9 1/2 in, 36X)	EDH-GEA-01010	1138
DFFP01A	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	1671
DFFP01A	primary	SIE	Revised P1 deadfront main blank or subfeed filler plate	EDH-SIE-00377	1671
DFFP01B	primary	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	1671
DFFP01C	primary	SIE	Revised P1 400A main blank filler plate	EDH-SIE-00065	1672
DFFP1	supersedes	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	1672
DFFP1	primary	SIE	1 in filler plate for BL/BQD/xGB/xGB2/ED blank positions; suitable for replacing	EDH-SIE-00407	1512
DFFP1A	primary	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	1672
DFFP1A	superseded_by	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	1482
DFFP3	primary	SIE	Deadfront filler kit	EDH-SIE-00076	1501
DFFP6	primary	SIE	Deadfront filler kit	EDH-SIE-00077	1502
DFFPED01	supersedes	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	1678
DFFPED01	primary	SIE	P1 main filler for 100-125A frames ED	EDH-SIE-00069	1673
DFFPFD01	primary	SIE	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels	EDH-SIE-00070	1674
DFFPJD01	primary	SIE	JD main filler plate (plastic)	EDH-SIE-00071	1675
DFFPJD02	primary	SIE	JD main filler plate for Revised P1 400A with large MB opening only	EDH-SIE-00072	1675
DFFPQJ01	primary	SIE	QJ main filler plate	EDH-SIE-00073	1676
DFFPQJ02	primary	SIE	QJ main filler plate	EDH-SIE-00074	1677
DFFPV5363A	primary	SIE	Revised P1 deadfront 3VA53/63 main breaker filler plate	EDH-SIE-00378	1677
DFFPVA41A	primary	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	1678
DFFPVA41A	superseded_by	SIE	P1 main filler for 100-125A frames ED	EDH-SIE-00069	1673
DFFPVA5262A	primary	SIE	RP1 main or subfeed filler	EDH-SIE-00067	1678
DFFPVA5262P2A	primary	SIE	3VA52/61/62 filler for single mount P2/P3 applications	EDH-SIE-00078	1502
DFFPVA5262P2B	primary	SIE	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or	EDH-SIE-00079	1503
DFFPVA5363A	primary	SIE	RP1 400A main filler for 3VA53/63	EDH-SIE-00068	1679
DFK07	primary	SIE	P2/P3 deadfront center strip	EDH-SIE-00086	1497
DFK08	primary	SIE	P2/P3 deadfront center strip	EDH-SIE-00087	1497
DFK09	primary	SIE	P2/P3 deadfront center strip kit, 27 in flange length	EDH-SIE-00379	1497
DFK1	primary	SIE	P2/P3 deadfront center strip kit	EDH-SIE-00085	1498
DFK10	primary	SIE	P2/P3 deadfront center strip kit, 30 in flange length	EDH-SIE-00380	1498
DFK11	primary	SIE	P2/P3 deadfront center strip kit, 33 in flange length	EDH-SIE-00381	1498
DFK12	primary	SIE	P2/P3 deadfront center strip kit, 36 in flange length	EDH-SIE-00382	1498
DFK13	primary	SIE	P2/P3 deadfront center strip kit, 39 in flange length	EDH-SIE-00383	1499
DFK14	primary	SIE	P2/P3 deadfront center strip kit, 42 in flange length	EDH-SIE-00384	1499
DFK15	primary	SIE	P2/P3 deadfront center strip kit, 45 in flange length	EDH-SIE-00385	1499
DFK16	primary	SIE	P2/P3 deadfront center strip kit, 48 in flange length	EDH-SIE-00386	1499
DFK17	primary	SIE	P2/P3 deadfront center strip kit, 51 in flange length	EDH-SIE-00387	1500
DFK18	primary	SIE	P2/P3 deadfront center strip kit, 54 in flange length	EDH-SIE-00388	1500

Number	Type	Mfr	Description	Catalogue ID	Pg
DFK19	primary	SIE	P2/P3 deadfront center strip kit, 57 in flange length	EDH-SIE-00389	1500
DFK20	primary	SIE	P2/P3 deadfront center strip kit, 60 in flange length	EDH-SIE-00390	1500
DFK21	primary	SIE	P2/P3 deadfront center strip kit, 63 in flange length	EDH-SIE-00391	1501
DFP3AP01	primary	SIE	P3 adapter plate	EDH-SIE-00084	1503
DPC2457	primary	EAT	PRL4 Type 12 enclosure 57 x 24 x 13.90 in	EDH-EAT-01119	486
DPC2473	primary	EAT	PRL4 Type 12 enclosure 73 x 24 x 13.90 in	EDH-EAT-01121	486
DPC2490	primary	EAT	PRL4 Type 12 enclosure 90 x 24 x 13.90 in	EDH-EAT-01123	486
DPC3673	primary	EAT	PRL4 Type 12 enclosure 73 x 36 x 13.90 in	EDH-EAT-01125	486
DPC3690	primary	EAT	PRL4 Type 12 enclosure 90 x 36 x 13.90 in	EDH-EAT-01127	486
DPJ2185	primary	GEA	GE panelboard door lock, 3-point vault handle type with key	EDH-GEA-00587	1157
DSLNEJT	primary	ZIN	Zinsco double slot twin mounting hardware, NEJ type	EDH-ZIN-00008	1872
DSLNET	primary	ZIN	Zinsco double slot twin mounting hardware for FPE NE breakers (inferred from nam	EDH-ZIN-00007	1872
DSLNFT	primary	ZIN	Zinsco double slot twin mounting hardware for FPE NF/NFJ (inferred from name)	EDH-ZIN-00009	1872
DSLNJT	primary	ZIN	Zinsco double slot twin mounting hardware for FPE NJ/NJL (inferred from name)	EDH-ZIN-00010	1873
DSLNM	primary	ZIN	Zinsco double slot mounting hardware for FPE NM (inferred from name)	EDH-ZIN-00011	1873
DSLNMS	primary	ZIN	Zinsco DSLNM mounting hardware (single?)	EDH-ZIN-00012	1873
DSLQB	primary	ZIN	Zinsco double slot breaker mounting hardware for QB	EDH-ZIN-00005	1873
DSLQFB	primary	ZIN	Zinsco double slot breaker mounting hardware for QFB	EDH-ZIN-00006	1873
E1X1PK	primary	EAT	Eaton F-frame 1A/1B auxiliary switch field kit (low-level/electronic circuit rat	EDH-EAT-01306	375
E2A1649-1	primary	EAT	3FQS NEMA 3R enclosure, 51.5 in tall	EDH-EAT-00833	414
E2A1649-2	primary	EAT	3FQS NEMA 3R enclosure, 60.5 in tall	EDH-EAT-00834	414
E2A1649-3	primary	EAT	3FQS NEMA 3R enclosure, 70.5 in tall	EDH-EAT-00835	414
E2A1649-4	primary	EAT	3FQS NEMA 3R enclosure, 34.5 in tall	EDH-EAT-00836	414
E2A1667-1	primary	EAT	3FQS enclosure Door, surface for 50 in box (200 A)	EDH-EAT-00862	409
E2A1667-10	primary	EAT	3FQS enclosure Door, flush for 69 in box (400 A)	EDH-EAT-00871	409
E2A1667-11	primary	EAT	3FQS enclosure Door-in-door, surface for 69 in box (400 A)	EDH-EAT-00872	409
E2A1667-12	primary	EAT	3FQS enclosure Door-in-door, flush for 69 in box (400 A)	EDH-EAT-00873	409
E2A1667-13	primary	EAT	3FQS enclosure Door, surface for 33 in box (200 A)	EDH-EAT-00874	409
E2A1667-14	primary	EAT	3FQS enclosure Door, flush for 33 in box (200 A)	EDH-EAT-00875	409
E2A1667-15	primary	EAT	3FQS enclosure Door-in-door, surface for 33 in box (200 A)	EDH-EAT-00876	410
E2A1667-16	primary	EAT	3FQS enclosure Door-in-door, flush for 33 in box (200 A)	EDH-EAT-00877	410
E2A1667-17	primary	EAT	3FQS enclosure Door, surface for 50 in box (400 A)	EDH-EAT-00878	410
E2A1667-18	primary	EAT	3FQS enclosure Door, flush for 50 in box (400 A)	EDH-EAT-00879	410
E2A1667-19	primary	EAT	3FQS enclosure Door-in-door, surface for 50 in box (400 A)	EDH-EAT-00880	410
E2A1667-2	primary	EAT	3FQS enclosure Door, surface for 59 in box (200 A)	EDH-EAT-00863	410
E2A1667-20	primary	EAT	3FQS enclosure Door-in-door, flush for 50 in box (400 A)	EDH-EAT-00881	411
E2A1667-21	primary	EAT	3FQS enclosure Door, surface for 59 in box (400 A)	EDH-EAT-00882	411
E2A1667-22	primary	EAT	3FQS enclosure Door, flush for 59 in box (400 A)	EDH-EAT-00883	411
E2A1667-23	primary	EAT	3FQS enclosure Door-in-door, surface for 59 in box (400 A)	EDH-EAT-00884	411
E2A1667-24	primary	EAT	3FQS enclosure Door-in-door, flush for 59 in box (400 A)	EDH-EAT-00885	411
E2A1667-3	primary	EAT	3FQS enclosure Door, flush for 50 in box (200 A)	EDH-EAT-00864	411
E2A1667-4	primary	EAT	3FQS enclosure Door, flush for 59 in box (200 A)	EDH-EAT-00865	412
E2A1667-5	primary	EAT	3FQS enclosure Door-in-door, surface for 50 in box (200 A)	EDH-EAT-00866	412
E2A1667-6	primary	EAT	3FQS enclosure Door-in-door, surface for 59 in box (200 A)	EDH-EAT-00867	412
E2A1667-7	primary	EAT	3FQS enclosure Door-in-door, flush for 50 in box (200 A)	EDH-EAT-00868	412
E2A1667-8	primary	EAT	3FQS enclosure Door-in-door, flush for 59 in box (200 A)	EDH-EAT-00869	412
E2A1667-9	primary	EAT	3FQS enclosure Door, surface for 69 in box (400 A)	EDH-EAT-00870	412
E2A1914	primary	EAT	3FQS Kit, circuit directory card and sleeve	EDH-EAT-00854	418
E2A1917-1	primary	EAT	3FQS Kit, panelboard hardware	EDH-EAT-00856	415

Number	Type	Mfr	Description	Catalogue ID	Pg
E2HBL	primary	SIE	Siemens Handle blocking device for All ED	EDH-SIE-00790	1696
EBF1	primary	SIE	NEB/HEB filler plate (EB deadfront filler)	EDH-SIE-00083	1513
ECBX231M	primary	SIE	Siemens Handle block	EDH-SIE-00765	1696
ECGK	primary	SIE	Copper equipment ground bus kit	EDH-SIE-00099	1649
ECMBR1	primary	SIE	Siemens Main breaker retainer for EQ load centers	EDH-SIE-00777	1845
ECMBR2	primary	SIE	Siemens Main breaker retainer for Ultimate load centers (Ultimate load center ma	EDH-SIE-00778	1845
ECPLD1	primary	SIE	Siemens Padlocking device for locking breaker in OFF position, 1P	EDH-SIE-00753	1699
ECPLD1R	primary	SIE	Siemens Padlocking device, red, 1P	EDH-SIE-00754	1699
ECPLD2	primary	SIE	Siemens Padlocking device, 2P	EDH-SIE-00755	1699
ECPLD2R	primary	SIE	Siemens Padlocking device, red, 2P	EDH-SIE-00756	1700
ECPLD3	primary	SIE	Siemens Padlocking device, 3P	EDH-SIE-00757	1700
ECPLD3R	primary	SIE	Siemens Padlocking device, red, 3P (printed "US2:ECPLD3R")	EDH-SIE-00758	1700
ECQL1	primary	SIE	Siemens handle blocking device (per photo caption)	EDH-SIE-00776	1696
ECQLD3	primary	SIE	Siemens Padlocking device listed under padlocking devices, 1P	EDH-SIE-00759	1700
ECQLD4	primary	SIE	Siemens Padlocking device for QT-Duplex breakers	EDH-SIE-00760	1846
ECQLN3	primary	SIE	Siemens Padlocking device for 150-225 A MBKA main breakers, QN, QNR	EDH-SIE-00761	1846
ECQML12	primary	SIE	Siemens Mechanical interlock bracket for 1 in breakers	EDH-SIE-00766	1694
ECQTH2	primary	SIE	Siemens Handle tie for (2) QT Duplex breakers	EDH-SIE-00763	1845
ECQTH3	primary	SIE	Siemens Handle tie, 2P, Type QP/BL	EDH-SIE-00764	1697
ECQTH4	primary	SIE	Siemens Device listed under Padlocking Device for (3) 1P breakers	EDH-SIE-00762	1701
ED2HPL	primary	SIE	Siemens Padlocking device (OFF) for All ED	EDH-SIE-00784	1701
ED3K	alias	OTH	Aftermarket bus connection kit BPRL3AEDCH (seller cross-ref to EAT KPRL3AED3)	EDH-OTH-00010	325
ED4BK	alias	OTH	Aftermarket bus connection kit BPRL4BEDCH (seller cross-ref to EAT KPRL4ED)	EDH-OTH-00022	429
ED4K	alias	OTH	Aftermarket bus connection kit BPRLEDCH (seller cross-ref to EAT KPRL4ED)	EDH-OTH-00012	431
ED64K	alias	OTH	Aftermarket bus connection kit BEDSITE (seller cross-ref to SIE SE6)	EDH-OTH-00061	1522
ED65K	alias	OTH	Aftermarket bus connection kit BEDITE (seller cross-ref to SIE 6E62)	EDH-OTH-00054	1713
EDPA	equivalent	SQD	Square D handle padlock attachment for EDB/EGB/EJB	EDH-SQD-00959	817
EDPAF	primary	SQD	Square D fixed OFF padlock attachment for ED/EG/EJ (distributor listing)	EDH-SQD-00960	817
EEC3K	primary	EAT	Series G EG-frame terminal end cover (gas barrier) 0.25 in conductor opening	EDH-EAT-00573	665
EEC4K	primary	EAT	Series G EG-frame terminal end cover (gas barrier) 0.41 in conductor opening	EDH-EAT-00574	665
EEEHD220015SB2	primary	EAT	Type EE2 circuit breaker plug-on unit for EP panelboard / ES switchboard (number	EDH-EAT-00945	114
EEFBP10T2	primary	EAT	Type EE2 breaker filler plate 10X (full-width)	EDH-EAT-00965	115
EEFBP6T2	primary	EAT	Type EE2 breaker filler plate 6X (full-width)	EDH-EAT-00960	116
EEFPB10T2	alias	EAT	Type EE2 breaker filler plate 10X (full-width)	EDH-EAT-00965	115
EEFPB12T2	primary	EAT	Type EE2 breaker filler plate 12X (full-width)	EDH-EAT-00966	116
EEFPB1S1	primary	EAT	Type EE2 breaker filler plate 1X (single-width)	EDH-EAT-00946	116
EEFPB2S1	primary	EAT	Type EE2 breaker filler plate 2X (single-width)	EDH-EAT-00948	116
EEFPB2S2N	primary	EAT	Type EE2 breaker filler plate 2X (single-width blank bus cover and trim filler a	EDH-EAT-00950	117
EEFPB2S2W	primary	EAT	Type EE2 breaker filler plate 2X (single-width blank wireway covering bus across	EDH-EAT-00949	117
EEFPB2T2	primary	EAT	Type EE2 breaker filler plate 2X (full-width)	EDH-EAT-00947	117

Number	Type	Mfr	Description	Catalogue ID	Pg
EEFPB3S2N	primary	EAT	Type EE2 breaker filler plate 3X (single-width blank bus cover and trim filler)	EDH-EAT-00952	117
EEFPB3S2W	primary	EAT	Type EE2 breaker filler plate 3X (single-width blank wireway)	EDH-EAT-00951	118
EEFPB4S1	primary	EAT	Type EE2 breaker filler plate 4X (single-width)	EDH-EAT-00954	118
EEFPB4S2N	primary	EAT	Type EE2 breaker filler plate 4X (single-width bus cover and trim filler)	EDH-EAT-00956	118
EEFPB4S2W	primary	EAT	Type EE2 breaker filler plate 4X (single-width blank wireway)	EDH-EAT-00955	118
EEFPB4T2	primary	EAT	Type EE2 breaker filler plate 4X (full-width)	EDH-EAT-00953	119
EEFPB5S1	primary	EAT	Type EE2 breaker filler plate 5X (single-width)	EDH-EAT-00957	119
EEFPB5S2N	primary	EAT	Type EE2 breaker filler plate 5X (single-width bus cover and trim filler)	EDH-EAT-00959	119
EEFPB5S2W	primary	EAT	Type EE2 breaker filler plate 5X (single-width blank wireway)	EDH-EAT-00958	119
EEFPB6S1	primary	EAT	Type EE2 breaker filler plate 6X (single-width)	EDH-EAT-00961	120
EEFPB6S2N	primary	EAT	Type EE2 breaker filler plate 6X (single-width bus cover and trim filler)	EDH-EAT-00963	120
EEFPB6S2W	primary	EAT	Type EE2 breaker filler plate 6X (single-width blank wireway)	EDH-EAT-00962	120
EEFPB6T2	alias	EAT	Type EE2 breaker filler plate 6X (full-width)	EDH-EAT-00960	116
EEFPB8T2	primary	EAT	Type EE2 breaker filler plate 8X (full-width)	EDH-EAT-00964	120
EEFPS1S2	primary	EAT	Type EE2 fusible switch filler plate 1X, across from single-width fusible switch	EDH-EAT-00967	121
EELD36600SB2	primary	EAT	LD3600 breaker with Cutler-Hammer EE hardware kit	EDH-EAT-00901	121
EEMODULEFS	primary	EAT	Cutler-Hammer EE panelboard mounting module for FS-frame breaker	EDH-EAT-00900	114
EF2RTDK	primary	EAT	Series G EG end cap kit, 2-pole, imperial	EDH-EAT-00584	668
EF2RTWK	primary	EAT	Series G EG end cap kit, 2-pole, metric	EDH-EAT-00581	669
EF3RTDK	primary	EAT	Series G EG end cap kit, 3-pole, imperial	EDH-EAT-00585	669
EF3RTWK	primary	EAT	Series G EG end cap kit, 3-pole, metric	EDH-EAT-00582	670
EF4RTDK	primary	EAT	Series G EG end cap kit, 4-pole, imperial	EDH-EAT-00586	671
EF4RTWK	primary	EAT	Series G EG end cap kit, 4-pole, metric	EDH-EAT-00583	672
EFHB	primary	EAT	Eaton Series G Non-padlockable handle block, EG	EDH-EAT-01293	380
EFPHB	primary	EAT	Eaton Series G Padlockable handle block, EG	EDH-EAT-01294	382
EFPHBOFF	primary	EAT	Eaton Series G Padlockable handle block OFF-only, EG	EDH-EAT-01295	383
EFPHL	primary	EAT	Eaton Series G Padlockable handle lock hasp, EG	EDH-EAT-01298	383
EFPHLOFF	primary	EAT	Eaton Series G Padlockable handle lock hasp OFF-only, EG	EDH-EAT-01301	383
EFTS3K	primary	EAT	Series G EG-frame terminal shield IP30 3-pole (line terminal area)	EDH-EAT-00570	666
EFTS4K	primary	EAT	Series G EG-frame terminal shield IP30 4-pole	EDH-EAT-00571	666
EGC12	primary	GEA	Insulated equipment ground kit EGC12 (ReliaGear RQ/RL/RE)	EDH-GEA-01057	1160
EGK	primary	SIE	Al/Cu equipment ground bus kit	EDH-SIE-00098	1650
EGS12	primary	GEA	A-Series Equipment ground, standard isolated/insulated, per 12 branch positions	EDH-GEA-00097	1068
EH3K	primary	SIE	Twin mounting hardware kit for FC20/VB, EE/EH/EF/HE, 150 A (possibly aftermarket	EDH-SIE-00427	1717
EIPBK	primary	EAT	Series G EG-frame interphase barriers (package of 12 priced individually)	EDH-EAT-00572	667
Enclosure height 24 in G01; 36 in G02; 42 in G07; 48 in G03; 60 in G04; 72 in G05; 90 in G06	style_number	EAT	PRL1a/2a/1X/2X deadfront cover assembly	EDH-EAT-00241	246
EWK1	primary	SIE	End wall kit with knockouts (20in W x 5.75in D) 20in	EDH-SIE-00240	1680
EWK1B	primary	SIE	End wall kit without knockouts (20in W x 5.75in D) 20in	EDH-SIE-00243	1680
EWK2	primary	SIE	End wall kit with knockouts (24in W x 7.75in D) 24in	EDH-SIE-00241	1681
EWK2B	primary	SIE	End wall kit without knockouts (24in W x 7.75in D) 24in	EDH-SIE-00244	1681
EWK3	primary	SIE	End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in	EDH-SIE-00242	1681

Number	Type	Mfr	Description	Catalogue ID	Pg
EX11	primary	SIE	Siemens Replacement handle extension (one shipped with breaker) for All MD, ND,	EDH-SIE-00794	1694
EZB2024R	primary	EAT	EZ Box, unpainted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-00998	278
EZB2030R	primary	EAT	EZ Box, unpainted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01004	278
EZB2036R	primary	EAT	EZ Box, unpainted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01010	279
EZB2042R	primary	EAT	EZ Box, unpainted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01016	279
EZB2048R	primary	EAT	EZ Box, unpainted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01022	279
EZB2054R	primary	EAT	EZ Box, unpainted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01028	280
EZB2060R	primary	EAT	EZ Box, unpainted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01034	280
EZB2072R	primary	EAT	EZ Box, unpainted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01040	280
EZB2090R	primary	EAT	EZ Box, unpainted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01046	281
EZBP2024R	primary	EAT	EZ Box, painted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-00999	281
EZBP2030R	primary	EAT	EZ Box, painted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01005	281
EZBP2036R	primary	EAT	EZ Box, painted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01011	282
EZBP2042R	primary	EAT	EZ Box, painted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01017	282
EZBP2048R	primary	EAT	EZ Box, painted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01023	282
EZBP2054R	primary	EAT	EZ Box, painted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01029	283
EZBP2060R	primary	EAT	EZ Box, painted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01035	283
EZBP2072R	primary	EAT	EZ Box, painted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01041	283
EZBP2090R	primary	EAT	EZ Box, painted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01047	284
EZT2024F	primary	EAT	EZ Trim, unvented flush-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01001	256
EZT2024S	primary	EAT	EZ Trim, unvented surface-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01000	256
EZT2030F	primary	EAT	EZ Trim, unvented flush-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01007	256
EZT2030S	primary	EAT	EZ Trim, unvented surface-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01006	257
EZT2036F	primary	EAT	EZ Trim, unvented flush-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01013	257
EZT2036S	primary	EAT	EZ Trim, unvented surface-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01012	258
EZT2042F	primary	EAT	EZ Trim, unvented flush-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01019	258
EZT2042S	primary	EAT	EZ Trim, unvented surface-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01018	259
EZT2048F	primary	EAT	EZ Trim, unvented flush-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01025	259
EZT2048S	primary	EAT	EZ Trim, unvented surface-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01024	260
EZT2054F	primary	EAT	EZ Trim, unvented flush-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01031	260
EZT2054S	primary	EAT	EZ Trim, unvented surface-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01030	261
EZT2060F	primary	EAT	EZ Trim, unvented flush-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01037	261
EZT2060S	primary	EAT	EZ Trim, unvented surface-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01036	262
EZT2072F	primary	EAT	EZ Trim, unvented flush-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01043	262
EZT2072S	primary	EAT	EZ Trim, unvented surface-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01042	263
EZT2090F	primary	EAT	EZ Trim, unvented flush-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01049	263
EZT2090S	primary	EAT	EZ Trim, unvented surface-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01048	264
EZTV2024F	primary	EAT	EZ Trim, vented flush-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01003	264

Number	Type	Mfr	Description	Catalogue ID	Pg
EZTV2024S	primary	EAT	EZ Trim, vented surface-mounted, 24 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01002	265
EZTV2030F	primary	EAT	EZ Trim, vented flush-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01009	265
EZTV2030S	primary	EAT	EZ Trim, vented surface-mounted, 30 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01008	265
EZTV2036F	primary	EAT	EZ Trim, vented flush-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01015	266
EZTV2036S	primary	EAT	EZ Trim, vented surface-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01014	266
EZTV2042F	primary	EAT	EZ Trim, vented flush-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01021	267
EZTV2042S	primary	EAT	EZ Trim, vented surface-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01020	267
EZTV2048F	primary	EAT	EZ Trim, vented flush-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01027	268
EZTV2048S	primary	EAT	EZ Trim, vented surface-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01026	268
EZTV2054F	primary	EAT	EZ Trim, vented flush-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01033	269
EZTV2054S	primary	EAT	EZ Trim, vented surface-mounted, 54 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01032	269
EZTV2060F	primary	EAT	EZ Trim, vented flush-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01039	270
EZTV2060S	primary	EAT	EZ Trim, vented surface-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01038	270
EZTV2072F	primary	EAT	EZ Trim, vented flush-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01045	271
EZTV2072S	primary	EAT	EZ Trim, vented surface-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01044	271
EZTV2090F	primary	EAT	EZ Trim, vented flush-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01051	272
EZTV2090S	primary	EAT	EZ Trim, vented surface-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01050	272
F602	primary	SIE	P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 2.5 in & 5 in hig	EDH-SIE-00400	1523
F602D	primary	SIE	P5/F2 (deep) Vacu-Break fusible switch mounting kit, 2.5 in high twin units (30A	EDH-SIE-00403	1575
F6150D	primary	SIE	Vacu-Break 15in single unit (400/600A) mounting kit, SPP/FPP/S5/F2/P5 deep box	EDH-SIE-00466	1602
F6162D	primary	SIE	800/1200A Sentron HCP switch branch mounting (connection strap) kit	EDH-SIE-00467	1602
F657	primary	SIE	P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 7.5 in high twin	EDH-SIE-00401	1524
F657D	primary	SIE	P5/F2 (deep) Vacu-Break fusible switch mounting kit, 5 in and 7.5 in high twin u	EDH-SIE-00404	1576
F671	primary	SIE	P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 7.5 in & 10 in hi	EDH-SIE-00402	1524
F671D	primary	SIE	P5/F2 (deep) Vacu-Break fusible switch mounting kit, 7.5 in and 10 in high singl	EDH-SIE-00405	1576
F672	primary	SIE	Twin 200A Vacu-Break mounting kit, type F1 / 10in deep FPP	EDH-SIE-00464	1560
F672D	primary	SIE	Twin 200A Vacu-Break mounting kit, type F2 / 12.75in deep FPP	EDH-SIE-00465	1603
FA3HT	primary	SQD	Square D California Title 24 combination handle tie and lock off, (3) 1P FA	EDH-SQD-00944	816
FABAM01W	primary	GEA	GE Record Plus FB/FC bell alarm 1 nc	EDH-GEA-00679	1075
FABAM10W	primary	GEA	GE Record Plus FB/FC bell alarm 1 no	EDH-GEA-00678	1075
FAS01LW	primary	GEA	GE Record Plus FB/FC auxiliary switch 1 nc, left mount	EDH-GEA-00676	1075
FAS01RW	primary	GEA	GE Record Plus FB/FC auxiliary switch 1 nc, right mount	EDH-GEA-00677	1076
FAS10LW	primary	GEA	GE Record Plus FB/FC auxiliary switch 1 no, left mount	EDH-GEA-00674	1076

Number	Type	Mfr	Description	Catalogue ID	Pg
FAS10RW	primary	GEA	GE Record Plus FB/FC auxiliary switch 1 no, right mount	EDH-GEA-00675	1076
FASHT7W	primary	GEA	GE Record Plus FB/FC shunt trip, 277 VAC	EDH-GEA-00670	1077
FASHTBW	primary	GEA	GE Record Plus FB/FC shunt trip, 12 VDC	EDH-GEA-00660	1077
FASHTDW	primary	GEA	GE Record Plus FB/FC shunt trip, 24 VAC/DC	EDH-GEA-00661	1077
FASHTFW	primary	GEA	GE Record Plus FB/FC shunt trip, 48 VAC/DC	EDH-GEA-00663	1078
FASHTJW	primary	GEA	GE Record Plus FB/FC shunt trip, 110-130 VAC/110-125 VDC	EDH-GEA-00665	1078
FASHTKW	primary	GEA	GE Record Plus FB/FC shunt trip, 120 VAC	EDH-GEA-00667	1078
FASHTNW	primary	GEA	GE Record Plus FB/FC shunt trip, 220/240 VAC, 250 VDC	EDH-GEA-00668	1079
FASHTUW	primary	GEA	GE Record Plus FB/FC shunt trip, 400/480 VAC	EDH-GEA-00672	1079
FAT	primary	SQD	Square D control wire terminal / tapped lug (FA)	EDH-SQD-00494	1008
FAUVR7W	primary	GEA	GE Record Plus FB/FC undervoltage release, 277 VAC	EDH-GEA-00671	1079
FAUVRDW	primary	GEA	GE Record Plus FB/FC undervoltage release, 24 VAC/DC	EDH-GEA-00662	1080
FAUVRFW	primary	GEA	GE Record Plus FB/FC undervoltage release, 48 VAC/DC	EDH-GEA-00664	1080
FAUVRJW	primary	GEA	GE Record Plus FB/FC undervoltage release, 110-130 VAC/110-125 VDC	EDH-GEA-00666	1080
FAUVRNW	primary	GEA	GE Record Plus FB/FC undervoltage release, 220/240 VAC, 250 VDC	EDH-GEA-00669	1080
FAUVRUW	primary	GEA	GE Record Plus FB/FC undervoltage release, 400/480 VAC	EDH-GEA-00673	1081
FB1K	alias	OTH	Aftermarket bus connection kit BCDPFBCH (seller cross-ref to EAT KCDPFB150)	EDH-OTH-00028	82
FB1PE	primary	GEA	GE padlock, EUSERC toggle, Record Plus FB 100	EDH-GEA-00652	1087
FB1PF	primary	GEA	GE padlock, fixed toggle, Record Plus FB 100	EDH-GEA-00651	1087
FBCD3	primary	SIE	VL DG front busbar connection set, 3-pole	EDH-SIE-00584	1823
FBCD4	primary	SIE	VL DG front busbar connection set, 4-pole	EDH-SIE-00585	1823
FBCF3	primary	SIE	VL FG front busbar connection set, 3-pole	EDH-SIE-00586	1823
FBCF4	primary	SIE	VL FG front busbar connection set, 4-pole	EDH-SIE-00587	1823
FBCJ3	primary	SIE	VL JG front busbar connection set, 3-pole	EDH-SIE-00588	1824
FBCJ4	primary	SIE	VL JG front busbar connection set, 4-pole	EDH-SIE-00589	1824
FBCL3	primary	SIE	VL LG front busbar connection set, 3-pole	EDH-SIE-00590	1824
FC1PE	primary	GEA	GE padlock, EUSERC toggle, Record Plus FC 100	EDH-GEA-00654	1087
FC1PF	primary	GEA	GE padlock, fixed toggle, Record Plus FC 100	EDH-GEA-00653	1087
FCAL12	primary	GEA	GE FCAL12 single lug, Record Plus FB/FC 100, 15-20 A	EDH-GEA-00369	1425
FCAL13	primary	GEA	GE FCAL13 single lug, Record Plus FB/FC 100, 25-60 A	EDH-GEA-00371	1425
FCAL14	primary	GEA	GE FCAL14 single lug, Record Plus FB/FC 100, 70-100 A	EDH-GEA-00373	1425
FCAL15	primary	GEA	GE FCAL15 single lug, Record Plus FE 250 (150 A)	EDH-GEA-00375	1432
FCAL16	primary	GEA	GE FCAL16 single lug, Record Plus FE 250 (250 A)	EDH-GEA-00378	1432
FCALK12	primary	GEA	GE FCALK12 lug kit (set of 3), Record Plus FB/FC 100, 15-20 A	EDH-GEA-00370	1424
FCALK13	primary	GEA	GE FCALK13 lug kit (set of 3), Record Plus FB/FC 100, 25-60 A	EDH-GEA-00372	1424
FCALK14	primary	GEA	GE FCALK14 lug kit (set of 3), Record Plus FB/FC 100, 70-100 A	EDH-GEA-00374	1424
FCALK15	primary	GEA	GE FCALK15 lug kit (3 lugs + lug cover), Record Plus FE (150 A)	EDH-GEA-00376	1431
FCALK15LV	primary	GEA	GE FCALK15LV lug kit with control wire terminal, Record Plus FE (150 A)	EDH-GEA-00377	1431
FCALK16	primary	GEA	GE FCALK16 lug kit (3 lugs + lug cover), Record Plus FE (250 A)	EDH-GEA-00379	1431
FCALK16LV	primary	GEA	GE FCALK16LV lug kit with control wire terminal, Record Plus FE (250 A)	EDH-GEA-00380	1432
FCALK218H	primary	GEA	GE FCALK218H 2-pole lug kit, Record Plus FG 600	EDH-GEA-00381	1434
FCALK318H	primary	GEA	GE FCALK318H 3-pole lug kit, Record Plus FG 600	EDH-GEA-00382	1435
FCDDF1	primary	GEA	GE Record Plus FC100 plug-in base kit FCDDF1 (3-pole, LSL, horizontal strap)	EDH-GEA-00796	1426
FCDDF2	primary	GEA	GE Record Plus FC100 plug-in base kit FCDDF2 (3-pole, SLS, horizontal strap)	EDH-GEA-00797	1427

Number	Type	Mfr	Description	Catalogue ID	Pg
FCDDF3	primary	GEA	GE Record Plus FC100 plug-in base kit FCDDF3 (3-pole, LSL, vertical strap)	EDH-GEA-00798	1427
FCDDF4	primary	GEA	GE Record Plus FC100 plug-in base kit FCDDF4 (3-pole, SLS, vertical strap)	EDH-GEA-00799	1428
FCDMP	primary	GEA	GE Record Plus FC100 plug-in accessory FCDMP	EDH-GEA-00803	1428
FCDSD	primary	GEA	GE Record Plus FC100 plug-in accessory FCDSD	EDH-GEA-00800	1430
FCDSDB	primary	GEA	GE Record Plus FC100 plug-in accessory FCDSDB	EDH-GEA-00802	1430
FCDSDP	primary	GEA	GE Record Plus FC100 plug-in accessory FCDSDP	EDH-GEA-00801	1430
FCMSK3	primary	GEA	GE Record Plus FC hardware FCMSK3	EDH-GEA-00804	1429
FCMSK4	primary	GEA	GE Record Plus FC hardware FCMSK4	EDH-GEA-00805	1429
FCNP3	primary	GEA	GE Record Plus FC hardware FCNP3	EDH-GEA-00806	1429
FCNPB	primary	GEA	GE Record Plus FC hardware FCNPB	EDH-GEA-00807	1429
FCPLD	primary	GEA	GE padlocking device (single padlock), FC frame	EDH-GEA-00658	1356
FCWTK	primary	EAT	Series C F-frame control wire terminal kit	EDH-EAT-00617	548
FCWTK225	primary	EAT	Series C F-frame control wire terminal kit	EDH-EAT-00618	550
FD3K	alias	OTH	Aftermarket bus connection kit BPRL3AFDCH (seller cross-ref to EAT KPRL3AFD3)	EDH-OTH-00009	325
FD4BK	alias	OTH	Aftermarket bus connection kit BPRL4BFDCH (seller cross-ref to EAT KPRL4FD)	EDH-OTH-00021	429
FD64K	alias	OTH	Aftermarket bus connection kit BFDSITE (seller cross-ref to SIE SF6)	EDH-OTH-00063	1522
FD65K	alias	OTH	Aftermarket bus connection kit BFDITE (seller cross-ref to SIE 6F62)	EDH-OTH-00056	1714
FD6HB1	primary	SIE	Siemens Handle blocking device for All FD	EDH-SIE-00791	1697
FD6PL1	primary	SIE	Siemens Padlocking device (OFF) for All FD	EDH-SIE-00785	1701
FDPBS324R	primary	EAT	PRL4 three-pole fusible switch 200 A, 240 V, single (6X)	EDH-EAT-01207	492
FDPBS364R	primary	EAT	PRL4 three-pole fusible switch 200 A, 600 V, single (6X)	EDH-EAT-01208	493
FDPBT3244R	primary	EAT	PRL4 three-pole fusible switch 200-200 A, 240 V, twin (6X)	EDH-EAT-01209	494
FDPBT3644R	primary	EAT	PRL4 three-pole fusible switch 200-200 A, 600 V, twin (6X)	EDH-EAT-01210	494
FDPW325R	primary	EAT	PRL4 three-pole fusible switch 400 A, 240 V, single (9X)	EDH-EAT-01211	494
FDPW326R	primary	EAT	PRL4 three-pole fusible switch 600 A, 240 V, single (11X)	EDH-EAT-01213	495
FDPW327	primary	EAT	PRL4 three-pole fusible switch 800 A, 240 V, single (11X)	EDH-EAT-01215	496
FDPW328	primary	EAT	PRL4 three-pole fusible switch 1200 A, 240 V, single (15X)	EDH-EAT-01217	496
FDPW365R	primary	EAT	PRL4 three-pole fusible switch 400 A, 600 V, single (9X)	EDH-EAT-01212	496
FDPW366R	primary	EAT	PRL4 three-pole fusible switch 600 A, 600 V, single (11X)	EDH-EAT-01214	497
FDPW367	primary	EAT	PRL4 three-pole fusible switch 800 A, 600 V, single (11X)	EDH-EAT-01216	498
FDPW368	primary	EAT	PRL4 three-pole fusible switch 1200 A, 600 V, single (15X)	EDH-EAT-01218	499
FDPWT3211R	primary	EAT	PRL4 three-pole fusible switch 30-30 A, 240 V, twin (4X)	EDH-EAT-01201	500
FDPWT3222R	primary	EAT	PRL4 three-pole fusible switch 60-60 A, 240 V, twin (4X)	EDH-EAT-01203	501
FDPWT3233R	primary	EAT	PRL4 three-pole fusible switch 100-100 A, 240 V, twin (4X)	EDH-EAT-01205	502
FDPWT3611R	primary	EAT	PRL4 three-pole fusible switch 30-30 A, 600 V, twin (4X)	EDH-EAT-01202	503
FDPWT3622R	primary	EAT	PRL4 three-pole fusible switch 60-60 A, 600 V, twin (4X)	EDH-EAT-01204	504
FDPWT3633R	primary	EAT	PRL4 three-pole fusible switch 100-100 A, 600 V, twin (5X)	EDH-EAT-01206	505
FE1PE	primary	GEA	GE EUSERC compliant padlock, Record Plus FE 250	EDH-GEA-00655	1087
FEMSK1	primary	GEA	GE mounting screw kit (#10) for tapped holes, Record Plus FE 250	EDH-GEA-00656	1073
FEMSK2	primary	GEA	GE Record Plus FE250 mounting screw kit FEMSK2	EDH-GEA-00808	1433
FEMSK3	primary	GEA	GE Record Plus FE250 mounting screw kit FEMSK3	EDH-GEA-00809	1433
FEMSK4	primary	GEA	GE Record Plus FE250 mounting screw kit FEMSK4	EDH-GEA-00810	1433
FG1PE	primary	GEA	GE padlocking EUSERC toggle, Record Plus FG 600	EDH-GEA-00657	1356
FGH1LCK	primary	GEA	GE FGH1LCK lug cover kit, Record Plus FG	EDH-GEA-00383	1435
FGJN3	primary	GEA	GE FGJN3 nut plate / terminal shoe, Record Plus FG	EDH-GEA-00385	1436
FGJS3	primary	GEA	GE FGJS3 terminal shield fin cover, Record Plus FG	EDH-GEA-00384	1435
FGMSK1	primary	GEA	GE Record Plus FG600 mounting hardware kit FGMSK1	EDH-GEA-00811	1434

Number	Type	Mfr	Description	Catalogue ID	Pg
FGMSK2	primary	GEA	GE Record Plus FG600 mounting hardware kit FGMSK2	EDH-GEA-00812	1434
FGPLD	primary	GEA	GE padlocking device (single padlock), FG frame	EDH-GEA-00659	1356
FJ3K	alias	OTH	Aftermarket bus connection kit BFJITE (seller cross-ref to SIE 5FJ2)	EDH-OTH-00067	1714
FJ3K	primary	SIE	Twin mounting hardware kit for FC20/VB, FJ3, 225 A (possibly aftermarket equival	EDH-SIE-00428	1718
FJ3RTDK	primary	EAT	Series G JG end cap kit, 3-pole, imperial	EDH-EAT-00589	680
FJ3RTWK	primary	EAT	Series G JG end cap kit, 3-pole, metric	EDH-EAT-00587	681
FJ4RTDK	primary	EAT	Series G JG end cap kit, 4-pole, imperial	EDH-EAT-00590	681
FJ4RTWK	primary	EAT	Series G JG end cap kit, 4-pole, metric	EDH-EAT-00588	682
FJCWTK	primary	EAT	Series G JG-frame control wire terminal kit (package of 14	EDH-EAT-00575	683
FJIPBK	primary	EAT	Series G JG-frame interphase barriers 3-pole (package of 2)	EDH-EAT-00568	676
FJIPBK4	primary	EAT	Series G JG-frame interphase barriers 4-pole (package of 2)	EDH-EAT-00569	677
FJPHBOFF	primary	EAT	Eaton Series G Padlockable handle block OFF-only, JG	EDH-EAT-01296	383
FJPHL	primary	EAT	Eaton Series G Padlockable handle lock hasp, JG	EDH-EAT-01299	384
FJPHLOFF	primary	EAT	Eaton Series G Padlockable handle lock hasp OFF-only, JG	EDH-EAT-01302	384
FJTS3K	primary	EAT	Series G JG-frame terminal shield IP30 2/3-pole	EDH-EAT-00566	678
FJTS4K	primary	EAT	Series G JG-frame terminal shield IP30 4-pole	EDH-EAT-00567	679
FKHT	primary	SQD	Square D Handle tie for (2) FA breakers, 3-pole	EDH-SQD-00941	816
FMPG1	primary	SIE	NGG/CQD face mounting plate, 1-pole	EDH-SIE-00532	1753
FMPG2	primary	SIE	NGG/CQD face mounting plate, 2-pole	EDH-SIE-00533	1754
FMPG3	primary	SIE	NGG/CQD face mounting plate, 3-pole	EDH-SIE-00534	1754
FP1	primary	SQD	Square D EHB filler plate, 1 in (NEHB)	EDH-SQD-00527	788
FP9508	primary	SIE	Siemens BQ/BQH face mount plate, 1P	EDH-SIE-00768	1683
FP9555	primary	SIE	Siemens BQ/BQH face mount plate, 2P	EDH-SIE-00769	1683
FP9556	primary	SIE	Siemens BQ/BQH face mount plate, 3P	EDH-SIE-00770	1683
FPENEFT	primary	ZIN	Sylvania twin mounting hardware for FPE NEF breaker	EDH-ZIN-00021	1874
FY3HT	primary	SQD	Square D California Title 24 combination handle tie and lock off, (3) 1P FY	EDH-SQD-00943	816
G01 24 in Al/Cu; G02 24 in Cu; G03 36-90 in Al/Cu; G04 36-90 in Cu	style_number	EAT	Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)	EDH-EAT-00236	242
G01 24 in encl Al/Cu; G03 24 in Cu; G02 36-90 in encl Al/Cu; G04 36-90 in Cu (vintage PRL: G02 boxes >=30 in, G01 boxes <30 in)	style_number	EAT	Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)	EDH-EAT-00235	242
GAVFP2	primary	GEA	GE blank filler plate 4.125 in x 17 in (AV1/AV2/CCB)	EDH-GEA-00608	1129
GAVFP3	primary	GEA	GE CCB/AV filler plate GAVFP3 (3X) - per seller listing	EDH-GEA-00612	1129
GCWTK	alias	EAT	Series G Series G / G-frame control wire terminal kit (package of 12); for steel	EDH-EAT-00576	668
GEA2-750	primary	GEA	Spectra main lug GEA2-750	EDH-GEA-00541	1215
GFI2PA	primary	SQD	Square D 2P QO-GFI handle padlock attachment, fixed	EDH-SQD-00928	885
GPHBOFF	primary	EAT	Eaton padlockable handle lock (handle block), G-frame	EDH-EAT-01275	384
GTIN 785901798019	alias	SQD	QMB blank filler plate QMB15BLW (15 in.)	EDH-SQD-00312	933
GTSK3	primary	EAT	Series C G-frame terminal shield	EDH-EAT-00628	558
GYT	primary	SQD	Square D G-frame terminal shield 3P	EDH-SQD-00471	1051
H01	style_number	EAT	PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only	EDH-EAT-00263	362
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizont	EDH-EAT-00272	368
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00273	368
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00274	369

Number	Type	Mfr	Description	Catalogue ID	Pg
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3	EDH-EAT-00275	363
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3	EDH-EAT-00276	364
H01 = 1.00 in (25.4 mm) ... H16 = 16.00 in (406.4 mm), 1 in increments	style_number	EAT	PRL1a/2a/1X/2X deadfront blank covers 1-16 in	EDH-EAT-00249	249
H01 12 ckt 10 in; H02 18/13 in; H03 24/16 in; H04 30/19 in; H05 36/22 in; H06 42/25 in; H07 48/28 in; H08 54/31 in; H09 60/34 in	style_number	EAT	Vintage PRL1 branch section deadfront cover	EDH-EAT-00289	175
H01 = 1X ... H12 = 12X	style_number	EAT	PRL3a/3X neutral / blank cover 1X-12X	EDH-EAT-00269	370
H01 bottom/H02 with lock-offs; H03 top/H04 with lock-offs	style_number	EAT	PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)	EDH-EAT-00259	362
H01 FCL; H02 FB-P	style_number	EAT	PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cove	EDH-EAT-00262	364
H01/H02 top; H03/H04 bottom (without/with lock-offs)	style_number	EAT	PRL3a/3X deadfront device cover: LCL vertical cover 21X	EDH-EAT-00264	362
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	EAT	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (P	EDH-EAT-00267	363
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	EAT	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2	EDH-EAT-00268	366
H01-H09 (12-60 circuits, 10-34 in high; same heights as 5156C10)	style_number	EAT	Vintage PRL2 branch section deadfront cover	EDH-EAT-00290	175
H01 (top and bottom)	style_number	EAT	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-202	EDH-EAT-00245	246
H01 (top and bottom)	style_number	EAT	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-202	EDH-EAT-00246	247
H01 top, H02 bottom	style_number	EAT	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device co	EDH-EAT-00242	248
H01 top, H02 bottom	style_number	EAT	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	EDH-EAT-00244	248
H01 top, H02 bottom	style_number	EAT	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	EDH-EAT-00247	247
H01 top, H02 bottom	style_number	EAT	PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover	EDH-EAT-00248	247
H01 top, H02 bottom	style_number	EAT	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL	EDH-EAT-00256	367
H01 top, H02 bottom	style_number	EAT	PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock	EDH-EAT-00258	419
H01 top, H02 bottom (same with/without lock-offs)	style_number	EAT	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH,	EDH-EAT-00255	367
H01 top, H04 bottom	style_number	EAT	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device co	EDH-EAT-00243	248
H01 top (thermal-magnetic), H02 bottom (PXR)	style_number	EAT	PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)	EDH-EAT-00257	419
HBLQR	primary	SIE	Siemens Handle blocking device for All QR	EDH-SIE-00788	1697
HC2609DEXF	primary	SQD	I-Line box extension 9 in for HCP-SU (flush; S = surface)	EDH-SQD-00788	760
HC2609DEXS	alias	SQD	I-Line box extension 9 in for HCP-SU (flush; S = surface)	EDH-SQD-00788	760
HC-2609-EXF	primary	SQD	Square D I-Line panelboard box extension kit, HCN or NH1B 9 in high extension (f	EDH-SQD-00556	760
HC-2609-EXS	equivalent	SQD	Square D I-Line panelboard box extension kit, HCN or NH1B 9 in high extension (f	EDH-SQD-00556	760

Number	Type	Mfr	Description	Catalogue ID	Pg
HC-2636-B	primary	SQD	Legacy 1970 I-Line box HC-2636-B, 26 x 6-1/4 in W x D, 36 in H	EDH-SQD-00824	760
HC-2636-CF	primary	SQD	Legacy 1970 I-Line front HC-2636-C for HC-2636-B box	EDH-SQD-00825	750
HC-2636-CS	alias	SQD	Legacy 1970 I-Line front HC-2636-C for HC-2636-B box	EDH-SQD-00825	750
HC-2645-B	primary	SQD	Legacy 1970 I-Line box HC-2645-B, 26 x 6-1/4 in W x D, 45 in H	EDH-SQD-00826	761
HC-2645-CF	primary	SQD	Legacy 1970 I-Line front HC-2645-C for HC-2645-B box	EDH-SQD-00827	750
HC-2645-CS	alias	SQD	Legacy 1970 I-Line front HC-2645-C for HC-2645-B box	EDH-SQD-00827	750
HC-2654-B	primary	SQD	Legacy 1970 I-Line box HC-2654-B, 26 x 6-1/4 in W x D, 54 in H	EDH-SQD-00828	761
HC-2654-CF	primary	SQD	Legacy 1970 I-Line front HC-2654-C for HC-2654-B box	EDH-SQD-00829	750
HC-2654-CS	alias	SQD	Legacy 1970 I-Line front HC-2654-C for HC-2654-B box	EDH-SQD-00829	750
HC-2663-B	primary	SQD	Legacy 1970 I-Line box HC-2663-B, 26 x 6-1/4 in W x D, 63 in H	EDH-SQD-00830	761
HC-2663-CF	primary	SQD	Legacy 1970 I-Line front HC-2663-C for HC-2663-B box	EDH-SQD-00831	750
HC-2663-CS	alias	SQD	Legacy 1970 I-Line front HC-2663-C for HC-2663-B box	EDH-SQD-00831	750
HC-2672-B	primary	SQD	Legacy 1970 I-Line box HC-2672-B, 26 x 6-1/4 in W x D, 72 in H	EDH-SQD-00832	762
HC-2672-CF	primary	SQD	Legacy 1970 I-Line front HC-2672-C for HC-2672-B box	EDH-SQD-00833	751
HC-2672-CS	alias	SQD	Legacy 1970 I-Line front HC-2672-C for HC-2672-B box	EDH-SQD-00833	751
HC2686DB	primary	SQD	I-Line NEMA 1 panelboard box HC2686DB (HCP-SU)	EDH-SQD-00757	762
HC2686T	primary	SQD	I-Line 4-piece trim (front) for HC2686DB box, F/S	EDH-SQD-00784	751
HC2686T( )D	alias	SQD	I-Line 4-piece trim (front) for HC2686DB box, F/S	EDH-SQD-00784	751
HC2686TF	alias	SQD	I-Line 4-piece trim (front) for HC2686DB box, F/S	EDH-SQD-00784	751
HC2686TS	alias	SQD	I-Line 4-piece trim (front) for HC2686DB box, F/S	EDH-SQD-00784	751
HC2686WP	primary	SQD	I-Line Type 3R/5/12 enclosure HC2686WP (I-Line Combo CP 18 in)	EDH-SQD-00775	762
HC-2690-B	primary	SQD	Legacy 1970 I-Line box HC-2690-B, 26 x 6-1/4 in W x D, 90 in H	EDH-SQD-00834	762
HC-2690-CF	primary	SQD	Legacy 1970 I-Line front HC-2690-C for HC-2690-B box	EDH-SQD-00835	751
HC-2690-CS	alias	SQD	Legacy 1970 I-Line front HC-2690-C for HC-2690-B box	EDH-SQD-00835	751
HC2886WP	primary	SQD	I-Line Type 3R/5/12 enclosure HC2886WP (HCP-SU)	EDH-SQD-00774	763
HC2SN	primary	SQD	I-Line solid neutral assembly, HCJ, 225 A, Al/Al	EDH-SQD-00162	719
HC-2SN	alias	SQD	I-Line solid neutral assembly, HCJ, 225 A, Al/Al	EDH-SQD-00162	719
HC-3209-EXF	primary	SQD	Square D I-Line panelboard box extension kit, HCM 9 in high extension (flush)	EDH-SQD-00557	763
HC-3209-EXF	alias	SQD	Square D I-Line panelboard box extension kit, HCM 9 in high extension (flush)	EDH-SQD-00557	763
HC-3209-EXS	equivalent	SQD	Square D I-Line panelboard box extension kit, HCM 9 in high extension (flush)	EDH-SQD-00557	763
HC3209EXS	alias	SQD	Square D I-Line panelboard box extension kit, HCM 9 in high extension (flush)	EDH-SQD-00557	763
HC-3238-B	primary	SQD	Legacy 1970 I-Line box HC-3238-B, 32 x 8 in W x D, 38 in H	EDH-SQD-00836	763
HC-3238-TF	primary	SQD	Legacy 1970 I-Line front HC-3238-T for HC-3238-B box	EDH-SQD-00837	751
HC-3238-TS	alias	SQD	Legacy 1970 I-Line front HC-3238-T for HC-3238-B box	EDH-SQD-00837	751
HC-3247-B	primary	SQD	Legacy 1970 I-Line box HC-3247-B, 32 x 8 in W x D, 47 in H	EDH-SQD-00838	764
HC-3247-TF	primary	SQD	Legacy 1970 I-Line front HC-3247-T for HC-3247-B box	EDH-SQD-00839	752
HC-3247-TS	alias	SQD	Legacy 1970 I-Line front HC-3247-T for HC-3247-B box	EDH-SQD-00839	752
HC3248DB9	primary	SQD	I-Line NEMA 1 panelboard box HC3248DB9 (HCJ (27 in mtg))	EDH-SQD-00758	764
HC-3256-B	primary	SQD	Legacy 1970 I-Line box HC-3256-B, 32 x 8 in W x D, 56 in H	EDH-SQD-00840	764
HC-3256-TF	primary	SQD	Legacy 1970 I-Line front HC-3256-T for HC-3256-B box	EDH-SQD-00841	752
HC-3256-TS	alias	SQD	Legacy 1970 I-Line front HC-3256-T for HC-3256-B box	EDH-SQD-00841	752
HC3273DB9	primary	SQD	I-Line NEMA 1 panelboard box HC3273DB9 (HCJ / I-Line Combo CP 22.5 in)	EDH-SQD-00759	764
HC-3274-B	primary	SQD	Legacy 1970 I-Line box HC-3274-B, 32 x 8 in W x D, 74 in H	EDH-SQD-00842	765
HC-3274-TF	primary	SQD	Legacy 1970 I-Line front HC-3274-T for HC-3274-B box	EDH-SQD-00843	752

Number	Type	Mfr	Description	Catalogue ID	Pg
HC-3274-TS	alias	SQD	Legacy 1970 I-Line front HC-3274-T for HC-3274-B box	EDH-SQD-00843	752
HC3291DB9	primary	SQD	I-Line NEMA 1 panelboard box HC3291DB9 (HCJ / I-Line Combo CP 22.5 in)	EDH-SQD-00760	765
HC-3292-B	primary	SQD	Legacy 1970 I-Line box HC-3292-B, 32 x 8 in W x D, 92 in H	EDH-SQD-00844	765
HC-3292-TF	primary	SQD	Legacy 1970 I-Line front HC-3292-T for HC-3292-B box	EDH-SQD-00845	752
HC-3292-TS	alias	SQD	Legacy 1970 I-Line front HC-3292-T for HC-3292-B box	EDH-SQD-00845	752
HC-4112-DEXF	primary	SQD	Square D I-Line panelboard box extension kit, HCWM 12 in high extension (flush)	EDH-SQD-00559	765
HC-4112-DEXS	equivalent	SQD	Square D I-Line panelboard box extension kit, HCWM 12 in high extension (flush)	EDH-SQD-00559	765
HC-4112-EXF	primary	SQD	Square D I-Line panelboard box extension kit, HCW 12 in high extension (flush)	EDH-SQD-00558	766
HC-4112-EXS	equivalent	SQD	Square D I-Line panelboard box extension kit, HCW 12 in high extension (flush)	EDH-SQD-00558	766
HC-4144-B	primary	SQD	Legacy 1970 I-Line box HC-4144-B, 41 x 8 in W x D, 44 in H	EDH-SQD-00846	766
HC-4144-DB	primary	SQD	Legacy 1970 I-Line box HC-4144-DB, 41 x 9-1/4 in W x D, 44 in H	EDH-SQD-00854	766
HC-4144-TS	primary	SQD	Legacy 1970 I-Line front HC-4144-TS for HC-4144-DB box	EDH-SQD-00855	753
HC-4153-B	primary	SQD	Legacy 1970 I-Line box HC-4153-B, 41 x 8 in W x D, 53 in H	EDH-SQD-00848	767
HC-4153-DB	primary	SQD	Legacy 1970 I-Line box HC-4153-DB, 41 x 9-1/4 in W x D, 53 in H	EDH-SQD-00856	767
HC-4153-TS	primary	SQD	Legacy 1970 I-Line front HC-4153-TS for HC-4153-DB box	EDH-SQD-00857	753
HC-4162-B	primary	SQD	Legacy 1970 I-Line box HC-4162-B, 41 x 8 in W x D, 62 in H	EDH-SQD-00850	767
HC-4162-DB	primary	SQD	Legacy 1970 I-Line box HC-4162-DB, 41 x 9-1/4 in W x D, 62 in H	EDH-SQD-00858	768
HC-4162-TS	primary	SQD	Legacy 1970 I-Line front HC-4162-TS for HC-4162-DB box	EDH-SQD-00859	753
HC-4180-B	primary	SQD	Legacy 1970 I-Line box HC-4180-B, 41 x 8 in W x D, 80 in H	EDH-SQD-00852	768
HC-4180-DB	primary	SQD	Legacy 1970 I-Line box HC-4180-DB, 41 x 9-1/4 in W x D, 80 in H	EDH-SQD-00860	768
HC-4180-TS	primary	SQD	Legacy 1970 I-Line front HC-4180-TS for HC-4180-DB box	EDH-SQD-00861	753
HC4212DEXF	primary	SQD	I-Line box extension 12 in for HCP (flush; S = surface)	EDH-SQD-00789	769
HC4212DEXS	alias	SQD	I-Line box extension 12 in for HCP (flush; S = surface)	EDH-SQD-00789	769
HC4250DB	primary	SQD	I-Line NEMA 1 panelboard box HC4250DB (HCP 27 in mtg)	EDH-SQD-00761	769
HC4250WP	primary	SQD	I-Line Type 3R/5/12 enclosure HC4250WP (HCP)	EDH-SQD-00766	769
HC4259DB	primary	SQD	I-Line NEMA 1 panelboard box HC4259DB (HCP 45 in mtg)	EDH-SQD-00762	769
HC4259WP	primary	SQD	I-Line Type 3R/5/12 enclosure HC4259WP (HCP)	EDH-SQD-00767	769
HC4268DB	primary	SQD	I-Line NEMA 1 panelboard box HC4268DB (HCP 63 in / 36 in MCB)	EDH-SQD-00763	770
HC4268WP	primary	SQD	I-Line Type 3R/5/12 enclosure HC4268WP (HCP)	EDH-SQD-00768	770
HC4286DB	primary	SQD	I-Line NEMA 1 panelboard box HC4286DB (HCP 99 in / 72 in MCB)	EDH-SQD-00764	770
HC4286WP	primary	SQD	I-Line Type 3R/5/12 enclosure HC4286WP (HCP)	EDH-SQD-00769	770
HC4406DEXF	primary	SQD	I-Line box extension 6 in for HCR-U (flush; S = surface)	EDH-SQD-00790	770
HC4406DEXS	alias	SQD	I-Line box extension 6 in for HCR-U (flush; S = surface)	EDH-SQD-00790	770
HC4412DEXF	primary	SQD	I-Line box extension 12 in for HCR-U (flush; S = surface)	EDH-SQD-00791	771
HC4412DEXS	alias	SQD	I-Line box extension 12 in for HCR-U (flush; S = surface)	EDH-SQD-00791	771
HC4486DB	primary	SQD	I-Line NEMA 1 panelboard box HC4486DB (HCR-U / I-Line Combo CP 31.5 in)	EDH-SQD-00765	771
HC4486WP	primary	SQD	I-Line Type 3R/5/12 enclosure HC4486WP (HCR-U)	EDH-SQD-00770	771
HC4SN	primary	SQD	I-Line solid neutral assembly, HCJ, 400 A, Al/Al	EDH-SQD-00163	720
HC-4SN	alias	SQD	I-Line solid neutral assembly, HCJ, 400 A, Al/Al	EDH-SQD-00163	720
HC6SN	primary	SQD	I-Line solid neutral assembly, HCJ, 600 A, Al/Al	EDH-SQD-00164	720
HC-6SN	alias	SQD	I-Line solid neutral assembly, HCJ, 600 A, Al/Al	EDH-SQD-00164	720
HC6SNALCU	primary	SQD	I-Line solid neutral assembly, HCJ, 600 A, Al lugs/Cu plate	EDH-SQD-00172	721
HC6SNCU	primary	SQD	I-Line solid neutral assembly, HCJ, 600 A, Cu/Cu	EDH-SQD-00180	721
HC8SN	primary	SQD	I-Line solid neutral assembly, HCJ, 800 A, Al/Al	EDH-SQD-00165	721

Number	Type	Mfr	Description	Catalogue ID	Pg
HC-8SN	alias	SQD	I-Line solid neutral assembly, HCJ, 800 A, Al/Al	EDH-SQD-00165	721
HC8SNALCU	primary	SQD	I-Line solid neutral assembly, HCJ, 800 A, Al lugs/Cu plate	EDH-SQD-00173	722
HC8SNCU	primary	SQD	I-Line solid neutral assembly, HCJ, 800 A, Cu/Cu	EDH-SQD-00181	722
HCJ3248WP	primary	SQD	I-Line Type 3R/5/12 enclosure HCJ3248WP (HCJ)	EDH-SQD-00771	771
HCJ3273WP	primary	SQD	I-Line Type 3R/5/12 enclosure HCJ3273WP (HCJ)	EDH-SQD-00772	771
HCJ3291WP	primary	SQD	I-Line Type 3R/5/12 enclosure HCJ3291WP (HCJ)	EDH-SQD-00773	772
HCM400VCA	primary	SQD	I-Line crimp lug adapter kit, HCJ, 400 A	EDH-SQD-00203	704
HCM48T	primary	SQD	I-Line 4-piece trim (front) for HC3248DB9 box, F/S	EDH-SQD-00781	754
HCM48T( )D	alias	SQD	I-Line 4-piece trim (front) for HC3248DB9 box, F/S	EDH-SQD-00781	754
HCM48TF	alias	SQD	I-Line 4-piece trim (front) for HC3248DB9 box, F/S	EDH-SQD-00781	754
HCM48TS	alias	SQD	I-Line 4-piece trim (front) for HC3248DB9 box, F/S	EDH-SQD-00781	754
HCM600VCA	primary	SQD	I-Line crimp lug adapter kit, HCJ, 600 A	EDH-SQD-00204	705
HCM73T	primary	SQD	I-Line 4-piece trim (front) for HC3273DB9 box, F/S	EDH-SQD-00782	754
HCM73T( )D	alias	SQD	I-Line 4-piece trim (front) for HC3273DB9 box, F/S	EDH-SQD-00782	754
HCM73TF	alias	SQD	I-Line 4-piece trim (front) for HC3273DB9 box, F/S	EDH-SQD-00782	754
HCM73TS	alias	SQD	I-Line 4-piece trim (front) for HC3273DB9 box, F/S	EDH-SQD-00782	754
HCM800VCA	primary	SQD	I-Line crimp lug adapter kit, HCJ, 800 A	EDH-SQD-00205	705
HCM91T	primary	SQD	I-Line 4-piece trim (front) for HC3291DB9 box, F/S	EDH-SQD-00783	754
HCM91T( )D	alias	SQD	I-Line 4-piece trim (front) for HC3291DB9 box, F/S	EDH-SQD-00783	754
HCM91TF	alias	SQD	I-Line 4-piece trim (front) for HC3291DB9 box, F/S	EDH-SQD-00783	754
HCM91TS	alias	SQD	I-Line 4-piece trim (front) for HC3291DB9 box, F/S	EDH-SQD-00783	754
HCP12SNALCU	primary	SQD	I-Line solid neutral assembly, HCP, 1200 A, Al lugs/Cu plate	EDH-SQD-00178	722
HCP12SNCU	primary	SQD	I-Line solid neutral assembly, HCP, 1200 A, Cu/Cu	EDH-SQD-00186	723
HCP4SNALCU	primary	SQD	I-Line solid neutral assembly, HCP, 400 A, Al lugs/Cu plate	EDH-SQD-00175	723
HCP5486-8SU	primary	SQD	I-Line HCP-SU panelboard (interior) HCP5486-8SU - trim kit reference	EDH-SQD-00787	736
HCP54868SU	alias	SQD	I-Line HCP-SU panelboard (interior) HCP5486-8SU - trim kit reference	EDH-SQD-00787	736
HCP6SNALCU	primary	SQD	I-Line solid neutral assembly, HCP, 600 A, Al lugs/Cu plate	EDH-SQD-00176	723
HCP8SNALCU	primary	SQD	I-Line solid neutral assembly, HCP, 800 A, Al lugs/Cu plate	EDH-SQD-00177	724
HCPSU8SN	primary	SQD	I-Line solid neutral assembly, HCP-SU, 800 A, Al/Al	EDH-SQD-00166	724
HCPSU8SNALCU	primary	SQD	I-Line solid neutral assembly, HCP-SU, 800 A, Al lugs/Cu plate	EDH-SQD-00174	724
HCPSU8SNCU	primary	SQD	I-Line solid neutral assembly, HCP-SU, 800 A, Cu/Cu	EDH-SQD-00182	725
HCPSU8SNCW	primary	SQD	I-Line HCP-SU 800 A neutral with CT, bonding strap and ground lug kit	EDH-SQD-00601	725
HCR12SNALCU	primary	SQD	I-Line solid neutral assembly, HCR-U, 1200 A, Al lugs/Cu plate	EDH-SQD-00179	725
HCR12SNCT	primary	SQD	I-Line HCR-U 1200 A solid neutral with neutral current transformer	EDH-SQD-00189	726
HCR12SNCTW	primary	SQD	I-Line HCR-U 1200 A solid neutral with CT, bonding strap and ground lug kit	EDH-SQD-00600	726
HCR12SNCU	primary	SQD	I-Line solid neutral assembly, HCR-U, 1200 A, Cu/Cu	EDH-SQD-00188	726
HCR86T	primary	SQD	I-Line 4-piece trim (front) for HC4486DB box, F/S	EDH-SQD-00780	755
HCR86T( )D	alias	SQD	I-Line 4-piece trim (front) for HC4486DB box, F/S	EDH-SQD-00780	755
HCR86TF	alias	SQD	I-Line 4-piece trim (front) for HC4486DB box, F/S	EDH-SQD-00780	755
HCR86TS	alias	SQD	I-Line 4-piece trim (front) for HC4486DB box, F/S	EDH-SQD-00780	755
HCS-4144-TF	primary	SQD	Legacy 1970 I-Line front HCS-4144-T for HC-4144-B box	EDH-SQD-00847	755
HCS-4144-TS	alias	SQD	Legacy 1970 I-Line front HCS-4144-T for HC-4144-B box	EDH-SQD-00847	755
HCS-4153-TF	primary	SQD	Legacy 1970 I-Line front HCS-4153-T for HC-4153-B box	EDH-SQD-00849	755
HCS-4153-TS	alias	SQD	Legacy 1970 I-Line front HCS-4153-T for HC-4153-B box	EDH-SQD-00849	755
HCS-4162-TF	primary	SQD	Legacy 1970 I-Line front HCS-4162-T for HC-4162-B box	EDH-SQD-00851	755
HCS-4162-TS	alias	SQD	Legacy 1970 I-Line front HCS-4162-T for HC-4162-B box	EDH-SQD-00851	755
HCS-4180-TF	primary	SQD	Legacy 1970 I-Line front HCS-4180-T for HC-4180-B box	EDH-SQD-00853	756
HCS-4180-TS	alias	SQD	Legacy 1970 I-Line front HCS-4180-T for HC-4180-B box	EDH-SQD-00853	756

Number	Type	Mfr	Description	Catalogue ID	Pg
HCT2DH26D9	primary	SQD	I-Line drip hood kit HCT2DH26D9 (HCP-SU, 26 in W x 9.5 in D)	EDH-SQD-00794	772
HCT2DH32D9	primary	SQD	I-Line drip hood kit HCT2DH32D9 (HCJ, 32 in W x 9.5 in D)	EDH-SQD-00792	772
HCT2DH42	primary	SQD	I-Line drip hood kit HCT2DH42 (HCP, 42 in W x 9.5 in D)	EDH-SQD-00793	772
HCT2DH42D12	primary	SQD	I-Line drip hood kit HCT2DH42D12 (HCP (DB: deep box), 42 in W x 12.5 in D)	EDH-SQD-00797	772
HCT2DH44	primary	SQD	I-Line drip hood kit HCT2DH44 (HCR-U, 44 in W x 9.5 in D)	EDH-SQD-00798	773
HCT2DH44D12	primary	SQD	I-Line drip hood kit HCT2DH44D12 (HCR-U (DB), 44 in W x 12.5 in D)	EDH-SQD-00801	773
HCT2DH47	primary	SQD	I-Line drip hood kit HCT2DH47 (HCP (L5: +5 in side extension), 47 in W x 9.5 in	EDH-SQD-00795	773
HCT2DH49	primary	SQD	I-Line drip hood kit HCT2DH49 (HCR-U (L5), 49 in W x 9.5 in D)	EDH-SQD-00799	773
HCT2DH56	primary	SQD	I-Line drip hood kit HCT2DH56 (HCP (PL: +14 in PowerLogic extension), 56 in W x	EDH-SQD-00796	773
HCT2DH58	primary	SQD	I-Line drip hood kit HCT2DH58 (HCR-U (PL), 58 in W x 9.5 in D)	EDH-SQD-00800	774
HCW1200VCA	primary	SQD	I-Line crimp lug adapter kit, HCP/HCR-U, 1200 A	EDH-SQD-00209	705
HCW12SN	primary	SQD	I-Line solid neutral assembly, HCP, 1200 A, Al/Al	EDH-SQD-00170	727
HCW-12SN	alias	SQD	I-Line solid neutral assembly, HCP, 1200 A, Al/Al	EDH-SQD-00170	727
HCW12SNCU	primary	SQD	I-Line solid neutral assembly, HCP, 1200 A, Cu/Cu	EDH-SQD-00187	727
HCW400VCA	primary	SQD	I-Line crimp lug adapter kit, HCP/HCR-U, 400 A	EDH-SQD-00206	705
HCW4SN	primary	SQD	I-Line solid neutral assembly, HCP, 400 A, Al/Al	EDH-SQD-00167	728
HCW-4SN	alias	SQD	I-Line solid neutral assembly, HCP, 400 A, Al/Al	EDH-SQD-00167	728
HCW4SNCU	primary	SQD	I-Line solid neutral assembly, HCP, 400 A, Cu/Cu	EDH-SQD-00183	728
HCW50D	primary	SQD	I-Line add-on door kit (for HCW50TS trim)	EDH-SQD-00785	756
HCW50T	primary	SQD	I-Line 4-piece trim (front) for HC4250DB box, F/S	EDH-SQD-00776	756
HCW50T( )D	alias	SQD	I-Line 4-piece trim (front) for HC4250DB box, F/S	EDH-SQD-00776	756
HCW50TF	alias	SQD	I-Line 4-piece trim (front) for HC4250DB box, F/S	EDH-SQD-00776	756
HCW50TS	alias	SQD	I-Line 4-piece trim (front) for HC4250DB box, F/S	EDH-SQD-00776	756
HCW59T	primary	SQD	I-Line 4-piece trim (front) for HC4259DB box, F/S	EDH-SQD-00777	757
HCW59T( )D	alias	SQD	I-Line 4-piece trim (front) for HC4259DB box, F/S	EDH-SQD-00777	757
HCW59TF	alias	SQD	I-Line 4-piece trim (front) for HC4259DB box, F/S	EDH-SQD-00777	757
HCW59TS	alias	SQD	I-Line 4-piece trim (front) for HC4259DB box, F/S	EDH-SQD-00777	757
HCW600VCA	primary	SQD	I-Line crimp lug adapter kit, HCP/HCR-U, 600 A	EDH-SQD-00207	706
HCW68T	primary	SQD	I-Line 4-piece trim (front) for HC4268DB box, F/S	EDH-SQD-00778	757
HCW68T( )D	alias	SQD	I-Line 4-piece trim (front) for HC4268DB box, F/S	EDH-SQD-00778	757
HCW68TF	alias	SQD	I-Line 4-piece trim (front) for HC4268DB box, F/S	EDH-SQD-00778	757
HCW68TS	alias	SQD	I-Line 4-piece trim (front) for HC4268DB box, F/S	EDH-SQD-00778	757
HCW6SN	primary	SQD	I-Line solid neutral assembly, HCP, 600 A, Al/Al	EDH-SQD-00168	729
HCW-6SN	alias	SQD	I-Line solid neutral assembly, HCP, 600 A, Al/Al	EDH-SQD-00168	729
HCW6SNCU	primary	SQD	I-Line solid neutral assembly, HCP, 600 A, Cu/Cu	EDH-SQD-00184	729
HCW800VCA	primary	SQD	I-Line crimp lug adapter kit, HCP/HCR-U, 800 A	EDH-SQD-00208	706
HCW86D	primary	SQD	I-Line add-on door kit (for HCR86TS trim)	EDH-SQD-00786	757
HCW86T	primary	SQD	I-Line 4-piece trim (front) for HC4286DB box, F/S	EDH-SQD-00779	758
HCW86T( )D	alias	SQD	I-Line 4-piece trim (front) for HC4286DB box, F/S	EDH-SQD-00779	758
HCW86TF	alias	SQD	I-Line 4-piece trim (front) for HC4286DB box, F/S	EDH-SQD-00779	758
HCW86TS	alias	SQD	I-Line 4-piece trim (front) for HC4286DB box, F/S	EDH-SQD-00779	758
HCW8SN	primary	SQD	I-Line solid neutral assembly, HCP, 800 A, Al/Al	EDH-SQD-00169	730
HCW-8SN	alias	SQD	I-Line solid neutral assembly, HCP, 800 A, Al/Al	EDH-SQD-00169	730
HCW8SNCU	primary	SQD	I-Line solid neutral assembly, HCP, 800 A, Cu/Cu	EDH-SQD-00185	730
HCWM12SN	primary	SQD	I-Line solid neutral assembly, HCR-U, 1200 A, Al/Al	EDH-SQD-00171	730
HJPA	primary	SQD	Square D PowerPact H/J padlock attachment (replacement for S29371)	EDH-SQD-00964	885

Number	Type	Mfr	Description	Catalogue ID	Pg
HJQLLC	alias	SQD	NQ U.S. service entrance barrier kit (H/J/Q main)	EDH-SQD-00046	849
HLK4	primary	EAT	Eaton padlockable handle lock hasp, L-frame side mounted / M-frame, lock ON or O	EDH-EAT-01284	384
HLK4LOFF	primary	EAT	Eaton padlockable handle lock hasp, L-/M-frame, lock OFF only	EDH-EAT-01285	385
HLK4S	primary	EAT	Eaton padlockable handle lock hasp, L-frame top mounted / M-frame vertical mount	EDH-EAT-01286	385
HLK4SOFF	primary	EAT	Eaton padlockable handle lock hasp, L-frame top mounted / M-frame vertical, lock	EDH-EAT-01287	385
HLK6	primary	EAT	Eaton padlockable handle lock hasp, R-frame lock ON/OFF	EDH-EAT-01291	385
HLK6OFF	primary	EAT	Eaton padlockable handle lock hasp, R-frame lock OFF only	EDH-EAT-01292	386
HLN1BL	primary	SQD	I-Line blank extension, 1.5 in., narrow side	EDH-SQD-00146	743
HLN4BL	primary	SQD	I-Line blank extension, 4.5 in., narrow side	EDH-SQD-00147	744
HLN4EBL	primary	SQD	I-Line blank extension, 4.5 in., narrow side (electronic trip access)	EDH-SQD-00149	744
HLO-1	primary	SQD	Square D handle lockoff for QO, Q1, A1 and Y1B breakers	EDH-SQD-00542	883
HLW1BL	primary	SQD	I-Line blank extension, 1.5 in., wide side	EDH-SQD-00144	745
HLW-1BL	alias	SQD	I-Line blank extension, 1.5 in., wide side	EDH-SQD-00144	745
HLW-3BL	primary	SQD	Square D I-Line blank extension HLW-3BL	EDH-SQD-00562	746
HLW-3BL	alias	SQD	Square D I-Line blank extension HLW-3BL	EDH-SQD-00562	746
HLW4BL	primary	SQD	I-Line blank extension, 4.5 in., wide side	EDH-SQD-00145	746
HLW-4BL	alias	SQD	I-Line blank extension, 4.5 in., wide side	EDH-SQD-00145	746
HLW4EBL	primary	SQD	I-Line blank extension, 4.5 in., wide side (electronic trip access)	EDH-SQD-00148	746
HNM1BL	primary	SQD	I-Line blank filler kit, 1.5 in. (3 per kit)	EDH-SQD-00142	747
HNM-1BL	alias	SQD	I-Line blank filler kit, 1.5 in. (3 per kit)	EDH-SQD-00142	747
HNM-3BL	primary	SQD	Square D I-Line blank, 3 in high	EDH-SQD-00561	748
HNM-3BL	alias	SQD	Square D I-Line blank, 3 in high	EDH-SQD-00561	748
HNM4BL	primary	SQD	I-Line blank filler kit, 4.5 in. (5 per kit)	EDH-SQD-00143	748
HNM-4BL	alias	SQD	I-Line blank filler kit, 4.5 in. (5 per kit)	EDH-SQD-00143	748
HPA-2QFS	primary	SQD	Square D padlock attachment for QFSB switch, 2/3-pole	EDH-SQD-00545	903
HPAFD	primary	SQD	Square D handle padlock attachment for EDB/EGB/EJB	EDH-SQD-00959	817
HPA-FK	primary	SQD	Square D padlock attachment for FA and KA breakers	EDH-SQD-00546	817
HPA-FYQ	primary	SQD	Square D padlock attachment for Q2 and FY breakers	EDH-SQD-00547	818
HPA-LM	primary	SQD	Square D padlock attachment for LA and MA (permanent trip) breakers	EDH-SQD-00548	818
HPAXLM	primary	SQD	Square D handle padlock attachment (locks ON or OFF) HPAXLM	EDH-SQD-00946	818
HPLG	primary	SIE	Siemens Padlocking device (OFF) for NGG, HGG, LGG	EDH-SIE-00783	1701
HPLQR	primary	SIE	Siemens Padlocking device (OFF) for All QR	EDH-SIE-00781	1702
HQO306	primary	SQD	Plug-on QO distribution panel for I-Line (6-pole)	EDH-SQD-00151	718
HRK1020	primary	SQD	QMB Class R fuse kit HRK1020	EDH-SQD-00276	973
HRK30	primary	SQD	QMB Class R fuse kit HRK30	EDH-SQD-00272	974
HT-100	primary	GEA	GE/Trumbull handle extension for 2-pole operation (lighting panel breakers)	EDH-GEA-00589	1156
ICGK	primary	SIE	Insulated copper ground bus kit	EDH-SIE-00101	1650
IGK	primary	SIE	Insulated Al/Cu ground bus kit	EDH-SIE-00100	1651
ILBFMHCJHULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCJ (HCM) / H, J	EDH-SQD-00152	737
ILBFMHCPHJULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / H, J	EDH-SQD-00153	737
ILBFMHCPLULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / LA,	EDH-SQD-00154	738
ILBFMHCPMPULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / M, P	EDH-SQD-00155	738
ILBFMHCRLULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCR / LA, LH, Powe	EDH-SQD-00156	738

Number	Type	Mfr	Description	Catalogue ID	Pg
ILBFMHCRMULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCR / M	EDH-SQD-00157	739
ILBFMHCRPULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCR / P	EDH-SQD-00158	739
ILBFMHCRRULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCR / R	EDH-SQD-00159	739
ILCOMBLUL26W	primary	SQD	I-Line Combo panelboard main line lug cover replacement side cover, 26 in enclos	EDH-SQD-00590	740
ILCOMBLUL32W	primary	SQD	I-Line Combo panelboard main line lug cover replacement side cover, 32 in enclos	EDH-SQD-00592	740
ILCOMBLUL44W	primary	SQD	I-Line Combo panelboard main line lug cover replacement side cover, 44 in enclos	EDH-SQD-00594	740
ILCOMBMPUL26W	primary	SQD	I-Line Combo panelboard main line lug cover replacement side cover, 26 in enclos	EDH-SQD-00591	740
ILCOMBMPUL32W	primary	SQD	I-Line Combo panelboard main line lug cover replacement side cover, 32 in enclos	EDH-SQD-00593	741
ILCOMBMPUL44W	primary	SQD	I-Line Combo panelboard main line lug cover replacement side cover, 44 in enclos	EDH-SQD-00595	741
ILHCJ1ESN	primary	SQD	I-Line expanded neutral kit, HCJ with 45 in. or larger unit mounting space, alum	EDH-SQD-00191	731
ILHCJ1ESNC	primary	SQD	I-Line expanded neutral kit, HCJ, copper	EDH-SQD-00197	731
ILHCJ27ESN	primary	SQD	I-Line expanded neutral kit, HCM/HCJ with 27 in. unit mounting space, aluminum	EDH-SQD-00190	731
ILHCJ2ESN	primary	SQD	I-Line expanded neutral kit, HCJ with 45 in. or larger unit mounting space, alum	EDH-SQD-00192	732
ILHCJ2ESNC	primary	SQD	I-Line expanded neutral kit, HCJ, copper	EDH-SQD-00198	732
ILHCPRU1ESN	primary	SQD	I-Line expanded neutral kit, HCP & HCR-U, aluminum	EDH-SQD-00195	732
ILHCPRU1ESNC	primary	SQD	I-Line expanded neutral kit, HCP & HCR-U, copper	EDH-SQD-00201	733
ILHCPRU2ESN	primary	SQD	I-Line expanded neutral kit, HCP & HCR-U, aluminum	EDH-SQD-00196	733
ILHCPRU2ESNC	primary	SQD	I-Line expanded neutral kit, HCP & HCR-U, copper	EDH-SQD-00202	733
ILHCPSU1ESN	primary	SQD	I-Line expanded neutral kit, HCP-SU, aluminum	EDH-SQD-00193	734
ILHCPSU1ESNC	primary	SQD	I-Line expanded neutral kit, HCP-SU, copper	EDH-SQD-00199	734
ILHCPSU2ESN	primary	SQD	I-Line expanded neutral kit, HCP-SU, aluminum	EDH-SQD-00194	734
ILHCPSU2ESNC	primary	SQD	I-Line expanded neutral kit, HCP-SU, copper	EDH-SQD-00200	735
ILMLC2W	primary	SQD	I-Line M-frame two-barrel main line lug cover (US service entrance)	EDH-SQD-00589	780
ILMLC2W1	alias	SQD	I-Line M-frame two-barrel main line lug cover (US service entrance)	EDH-SQD-00589	780
ILMLC3W	primary	SQD	I-Line M-frame three-barrel main line lug cover (US service entrance)	EDH-SQD-00588	780
ILMLC3W1	alias	SQD	I-Line M-frame three-barrel main line lug cover (US service entrance)	EDH-SQD-00588	780
ILMLC4W	primary	SQD	I-Line M-frame four-barrel main line lug cover (US service entrance)	EDH-SQD-00587	781
ILMLC4W1	alias	SQD	I-Line M-frame four-barrel main line lug cover (US service entrance)	EDH-SQD-00587	781
IMK1	primary	SIE	Interior mounting kit with adjustment provisions for P1/P2/P3	EDH-SIE-00095	1684
IPB1	primary	EAT	Series C interphase barrier (F)	EDH-EAT-00647	542
IPB2	primary	EAT	Series C interphase barrier (J, K per newer table)	EDH-EAT-00651	565
IPB3	primary	EAT	Series C interphase barrier (J, K)	EDH-EAT-00648	566
IPB4	primary	EAT	Series C interphase barrier (L, M)	EDH-EAT-00649	623
IPB5	primary	EAT	Series C interphase barrier (N; NG)	EDH-EAT-00650	651
IPBF4	primary	SIE	VL CG/DG/FG interphase barrier, 4-pole	EDH-SIE-00536	1825
IPBM4	primary	SIE	VL JG/LG/MG interphase barrier, 4-pole	EDH-SIE-00538	1825
IPBP4	primary	SIE	VL NG/PG interphase barrier, 4-pole	EDH-SIE-00540	1826
JD4K	alias	OTH	Aftermarket bus connection kit BPRLJDTCH (seller cross-ref to EAT KPRL4JDT)	EDH-OTH-00014	432

Number	Type	Mfr	Description	Catalogue ID	Pg
JD64K	alias	OTH	Aftermarket bus connection kit BJDSITE (seller cross-ref to SIE SJ1)	EDH-OTH-00064	1522
JD65K	alias	OTH	Aftermarket bus connection kit BJDITE (seller cross-ref to SIE 6JJ62)	EDH-OTH-00058	1714
JD6HBL	primary	SIE	Siemens Handle blocking device for All JD, LD, LMD	EDH-SIE-00792	1697
JD6HPL	primary	SIE	Siemens Padlocking device (OFF) for All JD, LD, LMD	EDH-SIE-00786	1702
JDS4BK	alias	OTH	Aftermarket bus connection kit BPRL4BJDSCH (seller cross-ref to EAT KPRL4JDS)	EDH-OTH-00023	430
JDS4K	alias	OTH	Aftermarket bus connection kit BPRLJDSCH (seller cross-ref to EAT KPRL4JDS)	EDH-OTH-00015	432
JDS65K	alias	OTH	Aftermarket bus connection kit BJDSGLITE (seller cross-ref to SIE 6JJ61)	EDH-OTH-00057	1715
JDTERMSHIELD	primary	SIE	Siemens JDTERMSHIELD terminal shield, JD/LD 3-pole	EDH-SIE-00276	1779
JJ3K	alias	OTH	Aftermarket bus connection kit BJLITE (seller cross-ref to SIE 5JJ2)	EDH-OTH-00066	1715
JJ3K	primary	SIE	Twin mounting hardware kit for FC20/VB, JD3/JJ3/JL3/HJ3, 400 A (possibly afterma	EDH-SIE-00429	1718
K-11-D-2550-01	primary	SIE	Revised P1 250A OEM chassis, 18 circuit, Cu 1-ph bus	EDH-SIE-00338	1652
K-11-D-2550-02	primary	SIE	Revised P1 250A OEM chassis, 30 circuit, Cu 1-ph bus	EDH-SIE-00339	1653
K-11-D-2550-03	primary	SIE	Revised P1 250A OEM chassis, 42 circuit, Cu 1-ph bus	EDH-SIE-00340	1653
K-11-D-2550-04	primary	SIE	Revised P1 250A OEM chassis, 54 circuit, Cu 1-ph bus	EDH-SIE-00341	1653
K-11-D-2550-05	primary	SIE	Revised P1 250A OEM chassis, 66 circuit, Cu 1-ph bus	EDH-SIE-00342	1654
K-11-D-2551-01	primary	SIE	Revised P1 250A OEM chassis, 18 circuit, Al 1-ph bus	EDH-SIE-00328	1654
K-11-D-2551-02	primary	SIE	Revised P1 250A OEM chassis, 30 circuit, Al 1-ph bus	EDH-SIE-00329	1654
K-11-D-2551-03	primary	SIE	Revised P1 250A OEM chassis, 42 circuit, Al 1-ph bus	EDH-SIE-00330	1655
K-11-D-2551-04	primary	SIE	Revised P1 250A OEM chassis, 54 circuit, Al 1-ph bus	EDH-SIE-00331	1655
K-11-D-2551-05	primary	SIE	Revised P1 250A OEM chassis, 66 circuit, Al 1-ph bus	EDH-SIE-00332	1655
K-11-D-2552-01	primary	SIE	Revised P1 250A OEM chassis, 18 circuit, Cu 3-ph bus	EDH-SIE-00343	1656
K-11-D-2552-02	primary	SIE	Revised P1 250A OEM chassis, 30 circuit, Cu 3-ph bus	EDH-SIE-00344	1656
K-11-D-2552-03	primary	SIE	Revised P1 250A OEM chassis, 42 circuit, Cu 3-ph bus	EDH-SIE-00345	1656
K-11-D-2552-04	primary	SIE	Revised P1 250A OEM chassis, 54 circuit, Cu 3-ph bus	EDH-SIE-00346	1657
K-11-D-2552-05	primary	SIE	Revised P1 250A OEM chassis, 66 circuit, Cu 3-ph bus	EDH-SIE-00347	1657
K-11-D-2553-01	primary	SIE	Revised P1 250A OEM chassis, 18 circuit, Al 3-ph bus	EDH-SIE-00333	1657
K-11-D-2553-02	primary	SIE	Revised P1 250A OEM chassis, 30 circuit, Al 3-ph bus	EDH-SIE-00334	1658
K-11-D-2553-03	primary	SIE	Revised P1 250A OEM chassis, 42 circuit, Al 3-ph bus	EDH-SIE-00335	1658
K-11-D-2553-04	primary	SIE	Revised P1 250A OEM chassis, 54 circuit, Al 3-ph bus	EDH-SIE-00336	1658
K-11-D-2553-05	primary	SIE	Revised P1 250A OEM chassis, 66 circuit, Al 3-ph bus	EDH-SIE-00337	1659
K-11-D-2554-01	primary	SIE	Revised P1 400A OEM chassis, 30 circuit, 1-ph, CU bus	EDH-SIE-00453	1659
K-11-D-2554-02	primary	SIE	Revised P1 400A OEM chassis, 42 circuit, 1-ph, CU bus	EDH-SIE-00455	1659
K-11-D-2554-03	primary	SIE	Revised P1 400A OEM chassis, 54 circuit, 1-ph, CU bus	EDH-SIE-00457	1660
K-11-D-2554-04	primary	SIE	Revised P1 400A OEM chassis, 66 circuit, 1-ph, CU bus	EDH-SIE-00459	1660
K-11-D-2555-01	primary	SIE	Revised P1 400A OEM chassis, 30 circuit, 1-ph, AL bus	EDH-SIE-00445	1660
K-11-D-2555-02	primary	SIE	Revised P1 400A OEM chassis, 42 circuit, 1-ph, AL bus	EDH-SIE-00447	1661
K-11-D-2555-03	primary	SIE	Revised P1 400A OEM chassis, 54 circuit, 1-ph, AL bus	EDH-SIE-00449	1661
K-11-D-2555-04	primary	SIE	Revised P1 400A OEM chassis, 66 circuit, 1-ph, AL bus	EDH-SIE-00451	1661
K-11-D-2556-01	primary	SIE	Revised P1 400A OEM chassis, 30 circuit, 3-ph, CU bus	EDH-SIE-00454	1662
K-11-D-2556-02	primary	SIE	Revised P1 400A OEM chassis, 42 circuit, 3-ph, CU bus	EDH-SIE-00456	1662
K-11-D-2556-03	primary	SIE	Revised P1 400A OEM chassis, 54 circuit, 3-ph, CU bus	EDH-SIE-00458	1662
K-11-D-2556-04	primary	SIE	Revised P1 400A OEM chassis, 66 circuit, 3-ph, CU bus	EDH-SIE-00460	1663
K-11-D-2557-01	primary	SIE	Revised P1 400A OEM chassis, 30 circuit, 3-ph, AL bus	EDH-SIE-00446	1663
K-11-D-2557-02	primary	SIE	Revised P1 400A OEM chassis, 42 circuit, 3-ph, AL bus	EDH-SIE-00448	1663
K-11-D-2557-03	primary	SIE	Revised P1 400A OEM chassis, 54 circuit, 3-ph, AL bus	EDH-SIE-00450	1664
K-11-D-2557-04	primary	SIE	Revised P1 400A OEM chassis, 66 circuit, 3-ph, AL bus	EDH-SIE-00452	1664
K80133	primary	EAT	Trim lock for right-handed door	EDH-EAT-00406	273

Number	Type	Mfr	Description	Catalogue ID	Pg
K80429	primary	EAT	T-handle lock	EDH-EAT-00408	273
K80522	primary	EAT	Trim lock for left-handed door	EDH-EAT-00405	273
KB11A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00038	303
KB11A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00037	303
KB11AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00006	180
KB11AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00005	181
KB11S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00040	304
KB11S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00039	304
KB11SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00008	181
KB11SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00007	182
KB13A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, b	EDH-EAT-00034	304
KB13A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, t	EDH-EAT-00033	305
KB13AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00002	182
KB13AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00001	183
KB13S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, b	EDH-EAT-00036	305
KB13S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, t	EDH-EAT-00035	305
KB13SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00004	183
KB13SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00003	184
KB1K	alias	OTH	Aftermarket bus connection kit BCDPKBCH (seller cross-ref to EAT KCDPKB)	EDH-OTH-00030	82
KB21A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00046	306
KB21A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00045	306
KB21AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00014	184
KB21AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00013	185
KB21S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00048	306
KB21S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00047	307
KB21SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00016	185
KB21SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00015	186
KB23A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, b	EDH-EAT-00042	307
KB23A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, t	EDH-EAT-00041	307
KB23AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00010	186
KB23AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00009	187

Number	Type	Mfr	Description	Catalogue ID	Pg
KB23S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, b	EDH-EAT-00044	308
KB23S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, t	EDH-EAT-00043	308
KB23SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00012	187
KB23SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00011	188
KB41A14B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00054	308
KB41A14T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00053	309
KB41AJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, t	EDH-EAT-00022	188
KB41AJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, tin-	EDH-EAT-00021	189
KB41AKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, t	EDH-EAT-00030	189
KB41AKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, tin-	EDH-EAT-00029	190
KB41S14B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00056	309
KB41S14T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00055	310
KB41SJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, s	EDH-EAT-00024	190
KB41SJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, silv	EDH-EAT-00023	191
KB41SKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, s	EDH-EAT-00032	191
KB41SKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, silv	EDH-EAT-00031	192
KB43A34B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00050	310
KB43A34T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00049	311
KB43AJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, ti	EDH-EAT-00018	192
KB43AJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, tin-p	EDH-EAT-00017	193
KB43AKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, ti	EDH-EAT-00026	193
KB43AKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, tin-p	EDH-EAT-00025	194
KB43S34B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00052	311
KB43S34T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00051	312
KB43SJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, si	EDH-EAT-00020	194
KB43SJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, silve	EDH-EAT-00019	195
KB43SKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, si	EDH-EAT-00028	195
KB43SKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, silve	EDH-EAT-00027	196
KB61S16B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00060	312
KB61S16T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00059	313

Number	Type	Mfr	Description	Catalogue ID	Pg
KB63S36B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00058	313
KB63S36T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00057	314
KBDP1C	primary	FPE	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	EDH-FPE-00007	1850
KBDP-1C	alias	FPE	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	EDH-FPE-00007	1850
KBDP1C	equivalent	OTH	Aftermarket bus connection kit BBDPNEF10FPE (seller cross-ref to FPE KBDP1C)	EDH-OTH-00006	1848
KBDP2C	primary	FPE	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	EDH-FPE-00008	1850
KBDP-2C	alias	FPE	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	EDH-FPE-00008	1850
KBDP2C	equivalent	OTH	Aftermarket bus connection kit BBDPNEJFPE (seller cross-ref to FPE KBDP2C)	EDH-OTH-00007	1849
KBDP3C	primary	FPE	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	EDH-FPE-00009	1851
KBDP-3C	alias	FPE	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	EDH-FPE-00009	1851
KBDP4C	primary	FPE	FPE BDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00010	1851
KBDP-4C	alias	FPE	FPE BDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00010	1851
KBDP4C	equivalent	OTH	Aftermarket bus connection kit BBDPNJLFPE (seller cross-ref to FPE KBDP4C)	EDH-OTH-00008	1849
KBDP5C	primary	FPE	FPE BDP mounting kit, NM/HNM frame	EDH-FPE-00011	1852
KCDP-1A	primary	FPE	FPE twin mounting kit for NE/NEF frames in NA1B/NH1B panels	EDH-FPE-00006	1866
KCDP1C	primary	FPE	FPE CDP twin bus-connection kit, NE/NEF frame	EDH-FPE-00001	1855
KCDP-1C	alias	FPE	FPE CDP twin bus-connection kit, NE/NEF frame	EDH-FPE-00001	1855
KCDP1C	equivalent	OTH	Aftermarket bus connection kit BCDPNEF10FPE (seller cross-ref to FPE KCDP1C)	EDH-OTH-00002	1853
KCDP2C	primary	FPE	FPE CDP twin bus-connection kit, NEJ/HEJ frame	EDH-FPE-00002	1856
KCDP-2C	alias	FPE	FPE CDP twin bus-connection kit, NEJ/HEJ frame	EDH-FPE-00002	1856
KCDP2C	equivalent	OTH	Aftermarket bus connection kit BCDPNEJFPE (seller cross-ref to FPE KCDP2C)	EDH-OTH-00003	1854
KCDP3C	primary	FPE	FPE CDP twin bus-connection kit, NFJ/HFJ frame	EDH-FPE-00003	1856
KCDP-3C	alias	FPE	FPE CDP twin bus-connection kit, NFJ/HFJ frame	EDH-FPE-00003	1856
KCDP3C	equivalent	OTH	Aftermarket bus connection kit BCDPNFJFPE (seller cross-ref to FPE KCDP3C)	EDH-OTH-00004	1854
KCDP4C	primary	FPE	FPE CDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00004	1857
KCDP-4C	alias	FPE	FPE CDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00004	1857
KCDP4C	equivalent	OTH	Aftermarket bus connection kit BCDPNJLFPE (seller cross-ref to FPE KCDP4C)	EDH-OTH-00005	1855
KCDP5C	primary	FPE	FPE CDP link kit, NM/NN frame	EDH-FPE-00005	1857
KCDP-5C	alias	FPE	FPE CDP link kit, NM/NN frame	EDH-FPE-00005	1857
KCDPCA	primary	EAT	Westinghouse CDP breaker connector kit KCDPCA (CA...)	EDH-EAT-00343	84
KCDPCA	equivalent	OTH	Aftermarket bus connection kit BCDPCACH (seller cross-ref to EAT KCDPCA)	EDH-OTH-00029	82
KCDPDK	primary	EAT	CDP Series C DK breaker retrofit kit (replaces Westinghouse DA)	EDH-EAT-00361	96
KCDPED225	primary	EAT	Westinghouse CDP breaker connector kit KCDPED225 (FD...)	EDH-EAT-00341	85
KCDPEHD	primary	EAT	CDP Series C EHD breaker retrofit kit (replaces Westinghouse EB, EHB)	EDH-EAT-00353	97
KCDPFB100	primary	EAT	Westinghouse CDP breaker connector kit KCDPFB100 (EHD...)	EDH-EAT-00340	85
KCDPFB100-H	primary	EAT	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of	EDH-EAT-00423	95
KCDPFB150	primary	EAT	Westinghouse CDP breaker connector kit KCDPFB150 (FB/FD twin, 150 A) - per after	EDH-EAT-01239	86
KCDPFB150	equivalent	OTH	Aftermarket bus connection kit BCDPFBCH (seller cross-ref to EAT KCDPFB150)	EDH-OTH-00028	82
KCDPFBP	primary	EAT	Westinghouse CDP breaker connector kit KCDPFBP (FB-P...)	EDH-EAT-00342	86

Number	Type	Mfr	Description	Catalogue ID	Pg
KCDPFD	primary	EAT	CDP Series C FD breaker retrofit kit (replaces Westinghouse HFB)	EDH-EAT-00355	98
KCDPFD100H	alias	EAT	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of	EDH-EAT-00423	95
KCDPFDB	primary	EAT	CDP Series C FDB breaker retrofit kit (replaces Westinghouse FB)	EDH-EAT-00354	99
KCDPHKD	primary	EAT	CDP Series C HKD breaker retrofit kit (replaces Westinghouse HKA)	EDH-EAT-00357	100
KCDPJD	primary	EAT	CDP Series C JD breaker retrofit kit (replaces Westinghouse KB, HKB)	EDH-EAT-00358	101
KCDPJDB	primary	EAT	CDP Series C JDB breaker retrofit kit (replaces Westinghouse JB)	EDH-EAT-00360	102
KCDPKB	primary	EAT	Westinghouse CDP breaker connector kit KCDPKB (JD...)	EDH-EAT-00344	87
KCDPKB	equivalent	OTH	Aftermarket bus connection kit BCDPKBCH (seller cross-ref to EAT KCDPKB)	EDH-OTH-00030	82
KCDPKD	primary	EAT	CDP Series C KD breaker retrofit kit (replaces Westinghouse KA)	EDH-EAT-00356	102
KCDPKDB	primary	EAT	CDP Series C KDB breaker retrofit kit (replaces Westinghouse JA)	EDH-EAT-00359	103
KCDPLA400	primary	EAT	Westinghouse CDP breaker connector kit KCDPLA400 (LA-P 3-pole...)	EDH-EAT-00346	88
KCDPLA400	equivalent	OTH	Aftermarket bus connection kit BCDPLACH (seller cross-ref to EAT KCDPLA400)	EDH-OTH-00032	83
KCDPLA600	primary	EAT	Westinghouse CDP breaker connector kit KCDPLA600 (LD...)	EDH-EAT-00347	88
KCDPLA600	equivalent	OTH	Aftermarket bus connection kit BCDPLCCH (seller cross-ref to EAT KCDPLA600)	EDH-OTH-00033	83
KCDPLB	primary	EAT	Westinghouse CDP breaker connector kit KCDPLB (DK...)	EDH-EAT-00345	89
KCDPLB	equivalent	OTH	Aftermarket bus connection kit BCDPLBCH (seller cross-ref to EAT KCDPLB)	EDH-OTH-00031	83
KCDPLCL	primary	EAT	Westinghouse CDP breaker connector kit KCDPLCL (LCL 3-pole...)	EDH-EAT-00348	90
KCDPLD	primary	EAT	CDP Series C LD breaker retrofit kit (replaces Westinghouse LA, HLA)	EDH-EAT-00362	104
KCDPMA	primary	EAT	Westinghouse CDP breaker connector kit KCDPMA (MA/MC/MDL single) - per aftermark	EDH-EAT-01240	90
KCDPMA	equivalent	OTH	Aftermarket bus connection kit BCDPMACH (seller cross-ref to EAT KCDPMA)	EDH-OTH-00034	84
KCDPMC	primary	EAT	Westinghouse CDP breaker connector kit KCDPMC (MDL...)	EDH-EAT-00349	90
KCDPMDL	primary	EAT	CDP Series C MDL breaker retrofit kit (replaces Westinghouse MA, HMA)	EDH-EAT-00363	105
KCDPNB	primary	EAT	Westinghouse CDP breaker connector kit KCDPNB (NB/NC/ND single) - per aftermarke	EDH-EAT-01241	91
KCDPNB	equivalent	OTH	Aftermarket bus connection kit BCDPNBCH (seller cross-ref to EAT KCDPNB)	EDH-OTH-00035	84
KCDPNBP	primary	EAT	Westinghouse CDP breaker connector kit KCDPNBP (NB-P 3-pole...)	EDH-EAT-00351	91
KCDPNC	primary	EAT	Westinghouse CDP breaker connector kit KCDPNC (ND...)	EDH-EAT-00350	92
KCDPND	primary	EAT	CDP Series C ND breaker retrofit kit (replaces Westinghouse NB, HNB)	EDH-EAT-00364	106
KCDP_X	primary	EAT	CDP filler cover (any X increment)	EDH-EAT-00352	94
KCWTK	primary	EAT	Series C J/K-frame control wire terminal kit	EDH-EAT-00619	570
KDS4BK	alias	OTH	Aftermarket bus connection kit BPRL4BKDSCH (seller cross-ref to EAT KPRL4KDS)	EDH-OTH-00024	430
KDS4K	alias	OTH	Aftermarket bus connection kit BPRLKDSCH (seller cross-ref to EAT KPRL4KDS)	EDH-OTH-00017	432
KFDP2C	primary	FPE	FPE FDP link/strap kit KFDP2C for QMQB switch units	EDH-FPE-00015	1859
KFDP-2C	alias	FPE	FPE FDP link/strap kit KFDP2C for QMQB switch units	EDH-FPE-00015	1859
KFDP3C	primary	FPE	FPE FDP link/strap kit KFDP3C for QMQB switch units	EDH-FPE-00016	1859
KFDP-3C	alias	FPE	FPE FDP link/strap kit KFDP3C for QMQB switch units	EDH-FPE-00016	1859

Number	Type	Mfr	Description	Catalogue ID	Pg
KFDP46C	primary	FPE	FPE FDP link/strap kit KFDP46C for QMQB switch units	EDH-FPE-00018	1860
KFDP-46C	alias	FPE	FPE FDP link/strap kit KFDP46C for QMQB switch units	EDH-FPE-00018	1860
KFDP4C	primary	FPE	FPE FDP link/strap kit KFDP4C for QMQB switch units	EDH-FPE-00017	1860
KFDP-4C	alias	FPE	FPE FDP link/strap kit KFDP4C for QMQB switch units	EDH-FPE-00017	1860
KFDP4XT	primary	EAT	Westinghouse FDP switch connector kit KFDP4XT	EDH-EAT-00366	72
KFDP-5C	primary	FPE	FPE FDP link kit (QMQB4036R into BDP switchgear)	EDH-FPE-00026	1860
KFDP5XT	primary	EAT	Westinghouse FDP switch connector kit KFDP5XT	EDH-EAT-00367	72
KFDP66C	primary	FPE	FPE FDP link/strap kit KFDP66C for QMQB switch units	EDH-FPE-00019	1861
KFDP7C	primary	FPE	FPE FDP link/strap kit KFDP7C for QMQB switch units	EDH-FPE-00020	1861
KFDPB6X-2	primary	EAT	Westinghouse FDP switch connector kit KFDPB6X-2	EDH-EAT-00368	73
KFDPBS324R	primary	EAT	FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)	EDH-EAT-00430	124
KFDPBS364R	primary	EAT	FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)	EDH-EAT-00431	124
KFDPD16C	primary	FPE	FPE FDP link/strap kit KFDPD16C for QMQB switch units	EDH-FPE-00021	1861
KFDPD26C	primary	FPE	FPE FDP link/strap kit KFDPD26C for QMQB switch units	EDH-FPE-00023	1862
KFDPS16C	primary	FPE	FPE FDP link/strap kit KFDPS16C for QMQB switch units	EDH-FPE-00022	1862
KFDPS26C	primary	FPE	FPE FDP link/strap kit KFDPS26C for QMQB switch units	EDH-FPE-00024	1862
KFDPV7C	primary	FPE	FPE FDP link/strap kit KFDPV7C for QMQB switch units	EDH-FPE-00025	1863
KFDPW11X-6	primary	EAT	Westinghouse FDP switch connector kit KFDPW11X-6	EDH-EAT-00370	73
KFDPW11X-8	primary	EAT	Westinghouse FDP switch connector kit KFDPW11X-8	EDH-EAT-00371	74
KFDPW15X-12	primary	EAT	Westinghouse FDP switch connector kit KFDPW15X-12	EDH-EAT-00372	74
KFDPW325R	primary	EAT	FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)	EDH-EAT-00432	125
KFDPW326R	primary	EAT	FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)	EDH-EAT-00434	125
KFDPW365R	primary	EAT	FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)	EDH-EAT-00433	126
KFDPW366R	primary	EAT	FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)	EDH-EAT-00435	126
KFDPW367	primary	EAT	FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)	EDH-EAT-00436	127
KFDPW368	primary	EAT	FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)	EDH-EAT-00437	127
KFDPW9X-4	primary	EAT	Westinghouse FDP switch connector kit KFDPW9X-4	EDH-EAT-00369	75
KFDPWT3211R	primary	EAT	FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)	EDH-EAT-00424	128
KFDPWT3222R	primary	EAT	FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)	EDH-EAT-00426	128
KFDPWT3233R	primary	EAT	FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)	EDH-EAT-00428	129
KFDPWT3611R	primary	EAT	FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)	EDH-EAT-00425	129
KFDPWT3622R	primary	EAT	FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)	EDH-EAT-00427	130
KFDPWT3633R	primary	EAT	FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)	EDH-EAT-00429	130
KFDP_X	primary	EAT	FDP filler cover (any X increment)	EDH-EAT-00373	123
KL11AMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00067	228
KL11AMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00071	200
KL11AMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00063	200
KL11AVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00079	229
KL11AVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00083	201

Number	Type	Mfr	Description	Catalogue ID	Pg
KL11AVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00075	201
KL11SCF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00088	229
KL11SCO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00090	201
KL11SCS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00086	202
KL11SMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00068	229
KL11SMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00072	202
KL11SMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00064	202
KL11SVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00080	230
KL11SVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00084	203
KL11SVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00076	203
KL13AMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00065	230
KL13AMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00069	203
KL13AMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00061	204
KL13AVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00077	230
KL13AVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00081	204
KL13AVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00073	204
KL13SCF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00087	231
KL13SCO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00089	205
KL13SCS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00085	205
KL13SMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00066	231
KL13SMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00070	205
KL13SMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00062	206
KL13SVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00078	231
KL13SVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00082	206
KL13SVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00074	206
KL21AMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00097	232
KL21AMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00101	207
KL21AMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00093	207
KL21AVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00109	232
KL21AVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00113	207

Number	Type	Mfr	Description	Catalogue ID	Pg
KL21AVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00105	208
KL21SCF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00118	232
KL21SCO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00120	208
KL21SCS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00116	208
KL21SMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00098	233
KL21SMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00102	209
KL21SMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00094	209
KL21SVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00110	233
KL21SVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00114	209
KL21SVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00106	210
KL23AMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00095	233
KL23AMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00099	210
KL23AMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00091	210
KL23AVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00107	234
KL23AVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00111	211
KL23AVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00103	211
KL23SCF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00117	234
KL23SCO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00119	211
KL23SCS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00115	212
KL23SMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00096	234
KL23SMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00100	212
KL23SMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00092	212
KL23SVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00108	235
KL23SVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00112	213
KL23SVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00104	213
KL41AMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00127	213
KL41AMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00123	214
KL41AVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00135	214
KL41AVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00131	214
KL41SCO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00138	215

Number	Type	Mfr	Description	Catalogue ID	Pg
KL41SMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00128	215
KL41SMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00124	215
KL41SVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00136	216
KL41SVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00132	216
KL43AMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00125	216
KL43AMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00121	217
KL43AVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00133	217
KL43AVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00129	217
KL43SCO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00137	218
KL43SMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00126	218
KL43SMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00122	218
KL43SVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00134	219
KL43SVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00130	219
KL61CMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, bare	EDH-EAT-00148	219
KL61CMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, bare	EDH-EAT-00142	220
KL61CVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, bare copper	EDH-EAT-00160	220
KL61CVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, bare copper	EDH-EAT-00154	220
KL61SMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00149	221
KL61SMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00143	221
KL61SVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00161	221
KL61SVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00155	222
KL61TMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00150	222
KL61TMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00144	222
KL61TVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00162	223
KL61TVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00156	223
KL63CMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, bare	EDH-EAT-00145	223
KL63CMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, bare	EDH-EAT-00139	224
KL63CVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, bare copper	EDH-EAT-00157	224
KL63CVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, bare copper	EDH-EAT-00151	224
KL63SMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00146	225

Number	Type	Mfr	Description	Catalogue ID	Pg
KL63SMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00140	225
KL63SVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00158	225
KL63SVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00152	226
KL63TMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00147	226
KL63TMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00141	226
KL63TVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, tin-plated c	EDH-EAT-00159	227
KL63TVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, tin-plated c	EDH-EAT-00153	227
KLP101	primary	GEA	Spectra ADS switch load-side lug kit KLP101 (#8-1/0 Cu/Al)	EDH-GEA-00878	1213
KLP300	primary	GEA	Spectra ADS switch load-side lug kit KLP300 (#4-300 kcmil Cu/Al)	EDH-GEA-00879	1213
KLP500	primary	GEA	Spectra ADS switch load-side lug kit KLP500 (2/0-500 kcmil Cu/Al)	EDH-GEA-00880	1214
KLP600	primary	GEA	Spectra ADS switch load-side lug kit KLP600 (400-600 kcmil Cu/Al or 400-500 kcmi	EDH-GEA-00881	1214
KLP750	primary	GEA	Spectra ADS switch load-side lug kit KLP750 (500-750 kcmil Al or 750 kcmil Cu)	EDH-GEA-00882	1214
KMP40KD3400	primary	EAT	MP40 / CDP / NFB breaker retrofit kit, KD 3-pole 400 A (example of KMP40 + break	EDH-EAT-00968	146
KNA1B1C	primary	FPE	FPE NA1B panelboard lug kit	EDH-FPE-00034	1865
KPEK1	primary	EAT	Series C F-frame end cap kit, 3-pole, 10-32	EDH-EAT-00593	551
KPEK12	primary	EAT	Series C F-frame end cap kit, 2-pole, 10-32	EDH-EAT-00591	551
KPEK14	primary	EAT	Series C F-frame end cap kit, 4-pole, 10-32	EDH-EAT-00595	552
KPEK2	primary	EAT	Series C J-frame end cap kit, 3-pole, .312-18	EDH-EAT-00597	571
KPEK24	primary	EAT	Series C J-frame end cap kit, 4-pole, .312-18	EDH-EAT-00599	571
KPEK3	primary	EAT	Series C K-frame end cap kit, 3-pole, .312-18	EDH-EAT-00601	605
KPEK34	primary	EAT	Series C K-frame end cap kit, 4-pole, .312-18	EDH-EAT-00603	606
KPEK4	primary	EAT	Series C L-frame end cap kit, 3-pole, .312-18	EDH-EAT-00605	626
KPEK44	primary	EAT	Series C L-frame end cap kit, 4-pole, .312-18	EDH-EAT-00607	627
KPEKM1	primary	EAT	Series C F-frame end cap kit, 3-pole, M5	EDH-EAT-00594	552
KPEKM12	primary	EAT	Series C F-frame end cap kit, 2-pole, M5	EDH-EAT-00592	553
KPEKM14	primary	EAT	Series C F-frame end cap kit, 4-pole, M5	EDH-EAT-00596	554
KPEKM2	primary	EAT	Series C J-frame end cap kit, 3-pole, M8	EDH-EAT-00598	572
KPEKM24	primary	EAT	Series C J-frame end cap kit, 4-pole, M8	EDH-EAT-00600	573
KPEKM3	primary	EAT	Series C K-frame end cap kit, 3-pole, M8	EDH-EAT-00602	607
KPEKM34	primary	EAT	Series C K-frame end cap kit, 4-pole, M8	EDH-EAT-00604	608
KPEKM4	primary	EAT	Series C L-frame end cap kit, 3-pole, M8	EDH-EAT-00606	627
KPEKM44	primary	EAT	Series C L-frame end cap kit, 4-pole, M8	EDH-EAT-00608	628
KPHCC3175S	primary	EAT	Cutler-Hammer PH panelboard retrofit kit, single-mount CC breaker 3P 175 A, with	EDH-EAT-00899	157
KPHFDB3100T	primary	EAT	Type PH breaker retrofit kit, FDB 3-pole 100 A, twin mount (example of KPH + bre	EDH-EAT-00939	164
KPH-LFDB3100T	primary	EAT	Type PH-L breaker retrofit kit, FDB 3-pole 100 A, twin (example of KPH-L numberi	EDH-EAT-00943	165
KPR1A	primary	EAT	Series C F-frame keeper nut (10-32, line or load end)	EDH-EAT-00609	544
KPR1AM	primary	EAT	Series C F-frame keeper nut (M5, line or load end)	EDH-EAT-00610	545
KPR3A	primary	EAT	Series C K-frame keeper nut (.375-16, line end)	EDH-EAT-00611	599
KPR3AM	primary	EAT	Series C K-frame keeper nut (M8, line end)	EDH-EAT-00613	599
KPR3B	primary	EAT	Series C K-frame keeper nut (.375-16, load end)	EDH-EAT-00612	600
KPR3BM	primary	EAT	Series C K-frame keeper nut (M8, load end)	EDH-EAT-00614	601

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL1BAB	primary	EAT	Vintage Westinghouse PRL1 replacement branch connector kit (12 poles)	EDH-EAT-00166	172
KPRL2GHB	primary	EAT	Vintage Westinghouse PRL2 replacement branch connector kit (12 poles)	EDH-EAT-00167	172
KPRL3ABA06	primary	EAT	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00184	325
KPRL3ABA06-1	primary	EAT	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00185	326
KPRL3ABA12	primary	EAT	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00186	327
KPRL3ABA12-1	primary	EAT	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00187	328
KPRL3ABA18	primary	EAT	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00188	329
KPRL3ABA18-1	primary	EAT	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00189	329
KPRL3ABA24	primary	EAT	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00190	330
KPRL3ABA24-1	primary	EAT	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00191	331
KPRL3AED2	primary	EAT	PRL3a horizontal F-frame breaker connector kit (FD...)	EDH-EAT-00209	332
KPRL3AED3	primary	EAT	PRL3a horizontal F-frame breaker connector kit (FD...)	EDH-EAT-00208	332
KPRL3AED3	equivalent	OTH	Aftermarket bus connection kit BPRL3AEDCH (seller cross-ref to EAT KPRL3AED3)	EDH-OTH-00010	325
KPRL3AFD1	primary	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00207	333
KPRL3AFD2	primary	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00206	333
KPRL3AFD3	primary	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00205	333
KPRL3AFD3	equivalent	OTH	Aftermarket bus connection kit BPRL3AFDCH (seller cross-ref to EAT KPRL3AFD3)	EDH-OTH-00009	325
KPRL3AGB06	primary	EAT	PRL3a horizontal 6-circuit GHB connector kit, 3-phase	EDH-EAT-00192	334
KPRL3AGB06-1	primary	EAT	PRL3a horizontal 6-circuit GHB connector kit, 1-phase	EDH-EAT-00193	336
KPRL3AGB12	primary	EAT	PRL3a horizontal 12-circuit GHB connector kit, 3-phase	EDH-EAT-00194	336
KPRL3AGB12-1	primary	EAT	PRL3a horizontal 12-circuit GHB connector kit, 1-phase	EDH-EAT-00195	337
KPRL3AGB18	primary	EAT	PRL3a horizontal 18-circuit GHB connector kit, 3-phase	EDH-EAT-00196	337
KPRL3AGB18-1	primary	EAT	PRL3a horizontal 18-circuit GHB connector kit, 1-phase	EDH-EAT-00197	338
KPRL3AGB24	primary	EAT	PRL3a horizontal 24-circuit GHB connector kit, 3-phase	EDH-EAT-00198	339
KPRL3AGB24-1	primary	EAT	PRL3a horizontal 24-circuit GHB connector kit, 1-phase	EDH-EAT-00199	340
KPRL3CA	primary	EAT	Vintage Westinghouse PRL3 replacement breaker connector kit (CA, CAH, HCA)	EDH-EAT-00212	321
KPRL3CF3	primary	EAT	Challenger twin mounting hardware kit KPRL3CF3, 150 A max	EDH-EAT-00788	112
KPRL3ED	primary	EAT	Vintage Westinghouse PRL3 replacement breaker connector kit (ED, EDH, EDC)	EDH-EAT-00211	321
KPRL3FD	primary	EAT	Vintage Westinghouse PRL3 replacement breaker connector kit (EHD, FDB, FD, HFD,	EDH-EAT-00210	322
KPRL3X21T	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 1-pole twin mount...)	EDH-EAT-00204	419
KPRL3X22	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)	EDH-EAT-00201	341
KPRL3X22T	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)	EDH-EAT-00203	342
KPRL3X23	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)	EDH-EAT-00200	343
KPRL3X23T	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)	EDH-EAT-00202	344
KPRL3XBA06	primary	EAT	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00168	345
KPRL3XBA06-1	primary	EAT	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00169	346
KPRL3XBA12	primary	EAT	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00170	347

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL3XBA12-1	primary	EAT	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00171	348
KPRL3XBA18	primary	EAT	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00172	349
KPRL3XBA18-1	primary	EAT	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00173	350
KPRL3XBA24	primary	EAT	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00174	351
KPRL3XBA24-1	primary	EAT	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00175	352
KPRL3XGB06	primary	EAT	PRL3X horizontal 6-circuit GHB connector kit, 3-phase	EDH-EAT-00176	353
KPRL3XGB06-1	primary	EAT	PRL3X horizontal 6-circuit GHB connector kit, 1-phase	EDH-EAT-00177	354
KPRL3XGB12	primary	EAT	PRL3X horizontal 12-circuit GHB connector kit, 3-phase	EDH-EAT-00178	355
KPRL3XGB12-1	primary	EAT	PRL3X horizontal 12-circuit GHB connector kit, 1-phase	EDH-EAT-00179	356
KPRL3XGB18	primary	EAT	PRL3X horizontal 18-circuit GHB connector kit, 3-phase	EDH-EAT-00180	357
KPRL3XGB18-1	primary	EAT	PRL3X horizontal 18-circuit GHB connector kit, 1-phase	EDH-EAT-00181	358
KPRL3XGB24	primary	EAT	PRL3X horizontal 24-circuit GHB connector kit, 3-phase	EDH-EAT-00182	359
KPRL3XGB24-1	primary	EAT	PRL3X horizontal 24-circuit GHB connector kit, 1-phase	EDH-EAT-00183	360
KPRL44X	primary	EAT	PRL4F fusible switch connector kit KPRL44X	EDH-EAT-00331	421
KPRL45X	supersedes	EAT	PRL4F fusible switch connector kit KPRL45X1	EDH-EAT-00332	423
KPRL45X	primary	EAT	PRL4F fusible switch connector kit KPRL45X	EDH-EAT-00333	422
KPRL45X1	primary	EAT	PRL4F fusible switch connector kit KPRL45X1	EDH-EAT-00332	423
KPRL45X1	superseded_by	EAT	PRL4F fusible switch connector kit KPRL45X	EDH-EAT-00333	422
KPRL45XS	primary	EAT	PRL4F fusible switch connector kit KPRL45XS	EDH-EAT-00334	423
KPRL4B6XS	primary	EAT	PRL4F fusible switch connector kit KPRL4B6XS	EDH-EAT-00335	424
KPRL4B6XT	primary	EAT	PRL4F fusible switch connector kit KPRL4B6XT	EDH-EAT-00336	424
KPRL4CA	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4CA (CA/CAH/HCA 2-pole (2X) or 3-pole (3X))	EDH-EAT-00308	434
KPRL4CA	equivalent	OTH	Aftermarket bus connection kit BPRLCACH (seller cross-ref to EAT KPRL4CA)	EDH-OTH-00013	431
KPRL4CD	primary	EAT	Challenger twin mounting hardware kit KPRL4CD, 225 A max	EDH-EAT-00784	112
KPRL4CED	primary	EAT	Challenger twin mounting hardware kit KPRL4CED, 225 A max	EDH-EAT-00783	112
KPRL4CKD	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4CKD (100% rated CKD/CHKD/CKDC 3-pole)	EDH-EAT-00322	435
KPRL4CND	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4CND (100% rated CND/CHND/CNDC/NGS-C/NGH-C/	EDH-EAT-00324	436
KPRL4CSL	primary	EAT	Challenger single mounting hardware kit KPRL4CSL, 600 A max	EDH-EAT-00785	112
KPRL4CSM	primary	EAT	Challenger single mounting hardware kit KPRL4CSM, 800 A max	EDH-EAT-00786	113
KPRL4CSN	primary	EAT	Challenger single mounting hardware kit KPRL4CSN, 1200 A max	EDH-EAT-00787	113
KPRL4ED	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	EDH-EAT-00301	461
KPRL4ED	primary	EAT	PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)	EDH-EAT-00329	437
KPRL4ED	equivalent	OTH	Aftermarket bus connection kit BPRLEDCH (seller cross-ref to EAT KPRL4ED)	EDH-OTH-00012	431
KPRL4ED	equivalent	OTH	Aftermarket bus connection kit BPRL4BEDCH (seller cross-ref to EAT KPRL4ED)	EDH-OTH-00022	429
KPRL4ED2	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	EDH-EAT-00300	460
KPRL4ED2	primary	EAT	PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)	EDH-EAT-00327	438
KPRL4FBP	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4FBP (FCL, FB-P, FD/LFD 3-pole)	EDH-EAT-00311	439
KPRL4FD	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	EDH-EAT-00301	461
KPRL4FD	primary	EAT	PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)	EDH-EAT-00328	441
KPRL4FD	equivalent	OTH	Aftermarket bus connection kit BPRLFDCH (seller cross-ref to EAT KPRL4FD)	EDH-OTH-00011	431

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL4FD	equivalent	OTH	Aftermarket bus connection kit BPRL4BFDCH (seller cross-ref to EAT KPRL4FD)	EDH-OTH-00021	429
KPRL4FD1	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X12 (PDG2 1-pole (two sets of twin-mounted	EDH-EAT-00299	459
KPRL4FD1	primary	EAT	PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)	EDH-EAT-00325	442
KPRL4FD2	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	EDH-EAT-00300	460
KPRL4FD2	primary	EAT	PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)	EDH-EAT-00326	443
KPRL4FDCL	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4FDCL (FD current limiter, 3-pole)	EDH-EAT-00307	444
KPRL4FDPBS324R	equivalent	EAT	PRL4 three-pole fusible switch 200 A, 240 V, single (6X)	EDH-EAT-01207	492
KPRL4FDPBS364R	equivalent	EAT	PRL4 three-pole fusible switch 200 A, 600 V, single (6X)	EDH-EAT-01208	493
KPRL4FDPBT3244R	equivalent	EAT	PRL4 three-pole fusible switch 200-200 A, 240 V, twin (6X)	EDH-EAT-01209	494
KPRL4FDPBT3644R	equivalent	EAT	PRL4 three-pole fusible switch 200-200 A, 600 V, twin (6X)	EDH-EAT-01210	494
KPRL4FDPW325R	equivalent	EAT	PRL4 three-pole fusible switch 400 A, 240 V, single (9X)	EDH-EAT-01211	494
KPRL4FDPW326R	equivalent	EAT	PRL4 three-pole fusible switch 600 A, 240 V, single (11X)	EDH-EAT-01213	495
KPRL4FDPW327	equivalent	EAT	PRL4 three-pole fusible switch 800 A, 240 V, single (11X)	EDH-EAT-01215	496
KPRL4FDPW328	equivalent	EAT	PRL4 three-pole fusible switch 1200 A, 240 V, single (15X)	EDH-EAT-01217	496
KPRL4FDPW365R	equivalent	EAT	PRL4 three-pole fusible switch 400 A, 600 V, single (9X)	EDH-EAT-01212	496
KPRL4FDPW366R	equivalent	EAT	PRL4 three-pole fusible switch 600 A, 600 V, single (11X)	EDH-EAT-01214	497
KPRL4FDPW367	equivalent	EAT	PRL4 three-pole fusible switch 800 A, 600 V, single (11X)	EDH-EAT-01216	498
KPRL4FDPW368	equivalent	EAT	PRL4 three-pole fusible switch 1200 A, 600 V, single (15X)	EDH-EAT-01218	499
KPRL4FDPWT3211R	equivalent	EAT	PRL4 three-pole fusible switch 30-30 A, 240 V, twin (4X)	EDH-EAT-01201	500
KPRL4FDPWT3222R	equivalent	EAT	PRL4 three-pole fusible switch 60-60 A, 240 V, twin (4X)	EDH-EAT-01203	501
KPRL4FDPWT3233R	equivalent	EAT	PRL4 three-pole fusible switch 100-100 A, 240 V, twin (4X)	EDH-EAT-01205	502
KPRL4FDPWT3611R	equivalent	EAT	PRL4 three-pole fusible switch 30-30 A, 600 V, twin (4X)	EDH-EAT-01202	503
KPRL4FDPWT3622R	equivalent	EAT	PRL4 three-pole fusible switch 60-60 A, 600 V, twin (4X)	EDH-EAT-01204	504
KPRL4FDPWT3633R	equivalent	EAT	PRL4 three-pole fusible switch 100-100 A, 600 V, twin (5X)	EDH-EAT-01206	505
KPRL4JDS	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4JDS (JD, JDB, HJD, JDC 2-/3-pole)	EDH-EAT-00309	445
KPRL4JDS	equivalent	OTH	Aftermarket bus connection kit BPRLJDSCH (seller cross-ref to EAT KPRL4JDS)	EDH-OTH-00015	432
KPRL4JDS	equivalent	OTH	Aftermarket bus connection kit BPRL4BJDSCH (seller cross-ref to EAT KPRL4JDS)	EDH-OTH-00023	430
KPRL4JDT	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4JDT (JD, JDB, HJD, JDC 2-/3-pole)	EDH-EAT-00310	446
KPRL4JDT	equivalent	OTH	Aftermarket bus connection kit BPRLJDTCH (seller cross-ref to EAT KPRL4JDT)	EDH-OTH-00014	432
KPRL4KDS	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4KDS (DK, KD, KDB, HKD, KDC 2-/3-pole)	EDH-EAT-00312	447
KPRL4KDS	equivalent	OTH	Aftermarket bus connection kit BPRLKDSCH (seller cross-ref to EAT KPRL4KDS)	EDH-OTH-00017	432
KPRL4KDS	equivalent	OTH	Aftermarket bus connection kit BPRL4BKDSCH (seller cross-ref to EAT KPRL4KDS)	EDH-OTH-00024	430
KPRL4KDT	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4KDT (DK, KD, KDB, HKD, KDC 2-/3-pole)	EDH-EAT-00313	448
KPRL4KDT	equivalent	OTH	Aftermarket bus connection kit BPRLKDTCH (seller cross-ref to EAT KPRL4KDT)	EDH-OTH-00016	433
KPRL4LAP	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4LAP (LA-P 3-pole)	EDH-EAT-00317	449
KPRL4LC	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])	EDH-EAT-00314	450
KPRL4LC	superseded_by	EAT	PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)	EDH-EAT-00330	452
KPRL4LCL	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4LCL (LCL 3-pole)	EDH-EAT-00318	451
KPRL4LD	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])	EDH-EAT-00314	450
KPRL4LD	primary	EAT	PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)	EDH-EAT-00330	452
KPRL4LD	equivalent	OTH	Aftermarket bus connection kit BPRLLDCH (seller cross-ref to EAT KPRL4LD)	EDH-OTH-00018	433

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL4LDS	primary	EAT	PRL4B column breaker connector kit KPRL4LDS (L-frame single) - per aftermarket s	EDH-EAT-01237	454
KPRL4LDS	equivalent	OTH	Aftermarket bus connection kit BPRL4BLDSCH (seller cross-ref to EAT KPRL4LDS)	EDH-OTH-00025	430
KPRL4LG	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4LG (LHH 3-pole)	EDH-EAT-00315	454
KPRL4MC	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)	EDH-EAT-00305	464
KPRL4MC	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])	EDH-EAT-00316	455
KPRL4MD	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4MD (100% rated CMDL/CHMDL 3-pole (2021))	EDH-EAT-00323	456
KPRL4MD	equivalent	OTH	Aftermarket bus connection kit BPRLMDCH (seller cross-ref to EAT KPRL4MD)	EDH-OTH-00019	434
KPRL4NBP	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4NBP (NB-P 3-pole)	EDH-EAT-00319	456
KPRL4NC	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4NC (NC/NCY/HNC [NB/HNB] 3-pole)	EDH-EAT-00320	457
KPRL4ND	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)	EDH-EAT-00306	465
KPRL4ND	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))	EDH-EAT-00321	458
KPRL4ND	equivalent	OTH	Aftermarket bus connection kit BPRLNDCH (seller cross-ref to EAT KPRL4ND)	EDH-OTH-00020	434
KPRL4W11X	primary	EAT	PRL4F fusible switch connector kit KPRL4W11X	EDH-EAT-00338	424
KPRL4W15X	primary	EAT	PRL4F fusible switch connector kit KPRL4W15X	EDH-EAT-00339	426
KPRL4W9X	primary	EAT	PRL4F fusible switch connector kit KPRL4W9X	EDH-EAT-00337	426
KPRL4X12	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X12 (PDG2 1-pole (two sets of twin-mounted	EDH-EAT-00299	459
KPRL4X12	superseded_by	EAT	PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)	EDH-EAT-00325	442
KPRL4X22	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	EDH-EAT-00300	460
KPRL4X22	superseded_by	EAT	PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)	EDH-EAT-00326	443
KPRL4X22	superseded_by	EAT	PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)	EDH-EAT-00327	438
KPRL4X32	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	EDH-EAT-00301	461
KPRL4X32	superseded_by	EAT	PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)	EDH-EAT-00328	441
KPRL4X32	superseded_by	EAT	PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)	EDH-EAT-00329	437
KPRL4X334S	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X334S (PDG3 400 A frame, 3-pole, single mo	EDH-EAT-00302	462
KPRL4X334T	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X334T (PDG3 400 A frame, 3-pole, twin moun	EDH-EAT-00303	462
KPRL4X336	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X336 (PDG3 600 A frame)	EDH-EAT-00304	463
KPRL4X34	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)	EDH-EAT-00305	464
KPRL4X34	superseded_by	EAT	PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])	EDH-EAT-00316	455
KPRL4X35	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)	EDH-EAT-00306	465
KPRL4X35	superseded_by	EAT	PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))	EDH-EAT-00321	458
KQB3C	primary	FPE	FPE QMQB switch strap/link kit KQB3C	EDH-FPE-00027	1863
KQB46C	primary	FPE	FPE QMQB switch strap/link kit KQB46C	EDH-FPE-00029	1863
KQB4C	primary	FPE	FPE QMQB switch strap/link kit KQB4C	EDH-FPE-00028	1864
KQB66C	primary	FPE	FPE QMQB switch strap/link kit KQB66C	EDH-FPE-00030	1864
KQB86C	primary	FPE	FPE QMQB switch strap/link kit KQB86C	EDH-FPE-00031	1864
KQB-D26C	primary	FPE	FPE QMQB switch strap/link kit KQB-D26C	EDH-FPE-00032	1864
KS3VA52T / KS3VA52TD = panel-builder versions without nut keepers and provision filler plates	equivalent	SIE	S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00129	1527
KS3VA52T / KS3VA52TD = panel-builder versions without nut keepers and provision filler plates	equivalent	SIE	S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00156	1528

Number	Type	Mfr	Description	Catalogue ID	Pg
KS3VA53T / KS3VA53TD panel-builder versions (no nut keepers / provision filler)	equivalent	SIE	S3VA53T connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00135	1529
KS3VA53T / KS3VA53TD panel-builder versions (no nut keepers / provision filler)	equivalent	SIE	S3VA53TD connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00161	1530
KS3VA54T / KS3VA54TD panel-builder versions	equivalent	SIE	S3VA54T connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00142	1531
KS3VA54T / KS3VA54TD panel-builder versions	equivalent	SIE	S3VA54TD connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00168	1531
L3RTWK	primary	EAT	Series G LG-frame end cap kit (metric nuts), 3-pole	EDH-EAT-00560	695
L4RTWK	primary	EAT	Series G LG-frame end cap kit (metric nuts), 4-pole	EDH-EAT-00561	696
LA11021	primary	SQD	Square D field-installable shunt trip 120/208/240 Vac, LA/LH/Q4	EDH-SQD-00950	776
LA11027	primary	SQD	Square D field-installable shunt trip 24 Vdc, LA/LH/Q4	EDH-SQD-00953	776
LA11028	primary	SQD	Square D field-installable shunt trip 48 Vdc, LA/LH/Q4	EDH-SQD-00954	777
LA11029	primary	SQD	Square D field-installable shunt trip 125 Vdc, LA/LH/Q4	EDH-SQD-00955	777
LA11037	primary	SQD	Square D field-installable shunt trip 277/480 Vac, LA/LH/Q4	EDH-SQD-00952	777
LA11042	primary	SQD	Square D field-installable shunt trip 24 Vac, LA/LH/Q4	EDH-SQD-00951	778
LA11121	primary	SQD	Square D field-installable undervoltage trip 120 Vac, LA/LH/Q4	EDH-SQD-00956	778
LA11124	primary	SQD	Square D field-installable undervoltage trip 240 Vac, LA/LH/Q4	EDH-SQD-00957	778
LA11212	primary	SQD	Square D field-installable auxiliary switch 1A/1B, LA/LH/Q4	EDH-SQD-00948	779
LA11352	primary	SQD	Square D field-installable auxiliary switch 2A/2B, LA/LH/Q4	EDH-SQD-00949	779
LA1CL	primary	SQD	Square D cylinder lock, field-installable, LA/LH/Q4	EDH-SQD-00947	781
LA1G	primary	SQD	Square D field-installable ground-fault shunt trip (obsolete GP Ground-Censor /	EDH-SQD-00958	779
LA4K	alias	OTH	Aftermarket bus connection kit BPRLLDCH (seller cross-ref to EAT KPRL4LD)	EDH-OTH-00018	433
LA4K	alias	OTH	Aftermarket bus connection kit BCDPLACH (seller cross-ref to EAT KCDPLA400)	EDH-OTH-00032	83
LA6K	alias	OTH	Aftermarket bus connection kit BCDPLCCH (seller cross-ref to EAT KCDPLA600)	EDH-OTH-00033	83
LAHT	primary	SQD	Square D Handle tie for 2 LA or 2 Q4 breakers	EDH-SQD-00942	816
LALLC	primary	SQD	I-Line LA/LH vertical main line lug cover (US SE)	EDH-SQD-00160	741
LB1K	alias	OTH	Aftermarket bus connection kit BCDPLBCH (seller cross-ref to EAT KCDPLB)	EDH-OTH-00031	83
LBHPOFF	primary	EAT	Eaton Series G Padlockable handle block OFF-only, LG	EDH-EAT-01297	386
LD1E060	primary	SIE	Siemens LD1E060 load-side lug, ED 1-pole 30-60A	EDH-SIE-00260	1759
LD1-E060	alias	SIE	Siemens LD1E060 load-side lug, ED 1-pole 30-60A	EDH-SIE-00260	1759
LD1E100	primary	SIE	Siemens LD1E100 load-side lug, ED 1-pole 70-100A	EDH-SIE-00261	1760
LD1-E100	alias	SIE	Siemens LD1E100 load-side lug, ED 1-pole 70-100A	EDH-SIE-00261	1760
LD65K	alias	OTH	Aftermarket bus connection kit BLDITE (seller cross-ref to SIE 6LL61)	EDH-OTH-00059	1716
LDD2457FTW	primary	EAT	PRL4 door-in-door trim, flush, for BX2457 (24 x 57 in)	EDH-EAT-01080	481
LDD2457STW	primary	EAT	PRL4 door-in-door trim, surface, for BX2457 (24 x 57 in)	EDH-EAT-01079	481
LDD2473FTW	primary	EAT	PRL4 door-in-door trim, flush, for BX2473 (24 x 73 in)	EDH-EAT-01085	481
LDD2473STW	primary	EAT	PRL4 door-in-door trim, surface, for BX2473 (24 x 73 in)	EDH-EAT-01084	481
LDD2490FTW	primary	EAT	PRL4 door-in-door trim, flush, for BX2490 (24 x 90 in)	EDH-EAT-01090	482
LDD2490STW	primary	EAT	PRL4 door-in-door trim, surface, for BX2490 (24 x 90 in)	EDH-EAT-01089	482
LDD3673FTW	primary	EAT	PRL4 door-in-door trim, flush, for BX3673 (36 x 73 in)	EDH-EAT-01095	482
LDD3673STW	primary	EAT	PRL4 door-in-door trim, surface, for BX3673 (36 x 73 in)	EDH-EAT-01094	482
LDD3690FTW	primary	EAT	PRL4 door-in-door trim, flush, for BX3690 (36 x 90 in)	EDH-EAT-01100	482
LDD3690STW	primary	EAT	PRL4 door-in-door trim, surface, for BX3690 (36 x 90 in)	EDH-EAT-01099	482
LDD4473FTW	primary	EAT	PRL4 door-in-door trim, flush, for BX4473 (44 x 73 in)	EDH-EAT-01104	483

Number	Type	Mfr	Description	Catalogue ID	Pg
LDD4473STW	primary	EAT	PRL4 door-in-door trim, surface, for BX4473 (44 x 73 in)	EDH-EAT-01103	483
LDD4490FTW	primary	EAT	PRL4 door-in-door trim, flush, for BX4490 (44 x 90 in)	EDH-EAT-01108	483
LDD4490STW	primary	EAT	PRL4 door-in-door trim, surface, for BX4490 (44 x 90 in)	EDH-EAT-01107	483
LDS4BK	alias	OTH	Aftermarket bus connection kit BPRL4BLDSCH (seller cross-ref to EAT KPRL4LDS)	EDH-OTH-00025	430
LGTES3	primary	EAT	Series G LG-frame terminal spreader, 3-pole	EDH-EAT-00564	697
LGTES4	primary	EAT	Series G LG-frame terminal spreader, 4-pole	EDH-EAT-00565	698
LGTEW3	primary	EAT	Series G LG-frame terminal extension, 3-pole	EDH-EAT-00562	699
LGTEW4	primary	EAT	Series G LG-frame terminal extension, 4-pole	EDH-EAT-00563	700
LK11600N2	primary	SIE	Power Mod modular metering main lug kit, #2-600 kcmil	EDH-SIE-00691	1837
LK11750	primary	SIE	Power Mod lug kit for JD/LD frame breaker, 3-lug (3-pole)	EDH-SIE-00669	1772
LK11750N2	primary	SIE	Power Mod modular metering main lug kit, 300-750 kcmil	EDH-SIE-00695	1837
LK12350N2	primary	SIE	Power Mod modular metering main lug kit, #6-350 kcmil	EDH-SIE-00677	1837
LK12500	primary	SIE	Power Mod lug kit for JD/LD frame breaker, 3-lug (3-pole)	EDH-SIE-00667	1773
LK12500N2	primary	SIE	Power Mod modular metering main lug kit, 1/0-500 kcmil	EDH-SIE-00679	1838
LK12500N2E	primary	SIE	Power Mod modular metering main lug kit, #2-500 kcmil	EDH-SIE-00681	1838
LK12600N2	primary	SIE	Power Mod modular metering main lug kit, #2-600 kcmil	EDH-SIE-00693	1838
LK12750N2	primary	SIE	Power Mod modular metering main lug kit, 300-750 kcmil	EDH-SIE-00697	1838
LK13500	primary	SIE	Power Mod lug kit for MD/ND frame breaker, 3-lug (3-pole)	EDH-SIE-00671	1792
LK13500N2	primary	SIE	Power Mod modular metering main lug kit, 1/0-500 kcmil	EDH-SIE-00683	1839
LK13750	primary	SIE	Power Mod lug kit for MD/ND frame breaker, 3-lug (3-pole)	EDH-SIE-00673	1792
LK13750N2	primary	SIE	Power Mod modular metering main lug kit, 300-750 kcmil	EDH-SIE-00699	1839
LK13750N2E	primary	SIE	Power Mod modular metering main lug kit, 300-750 kcmil	EDH-SIE-00701	1839
LK14500	primary	SIE	Power Mod lug kit for MD/ND frame breaker, 3-lug (3-pole)	EDH-SIE-00675	1792
LK14500N2	primary	SIE	Power Mod modular metering main lug kit, 1/0-500 kcmil	EDH-SIE-00685	1839
LK14500N2E	primary	SIE	Power Mod modular metering main lug kit, 1/0-500 kcmil	EDH-SIE-00687	1840
LK-15	primary	ZIN	Zinsco main lug block 150 A	EDH-ZIN-00023	1877
LK15600N2	primary	SIE	Power Mod modular metering main lug kit, 1/0-600 kcmil	EDH-SIE-00689	1840
LK15750N2	primary	SIE	Power Mod modular metering main lug kit, 300-750 kcmil	EDH-SIE-00703	1840
LK16750N2	primary	SIE	Power Mod modular metering main lug kit, 1/0-750 kcmil	EDH-SIE-00705	1840
LK-22	primary	ZIN	Zinsco main lug block 225 A	EDH-ZIN-00024	1877
LK31600N2	primary	SIE	Power Mod modular metering main lug kit, #2-600 kcmil	EDH-SIE-00692	1841
LK31750	primary	SIE	Power Mod lug kit for JD/LD frame breaker, 4-lug	EDH-SIE-00670	1773
LK31750N2	primary	SIE	Power Mod modular metering main lug kit, 300-750 kcmil	EDH-SIE-00696	1841
LK32350N2	primary	SIE	Power Mod modular metering main lug kit, #6-350 kcmil	EDH-SIE-00678	1841
LK32500	primary	SIE	Power Mod lug kit for JD/LD frame breaker, 4-lug	EDH-SIE-00668	1773
LK32500N2	primary	SIE	Power Mod modular metering main lug kit, 1/0-500 kcmil	EDH-SIE-00680	1841
LK32500N2E	primary	SIE	Power Mod modular metering main lug kit, #2-500 kcmil	EDH-SIE-00682	1842
LK32600N2	primary	SIE	Power Mod modular metering main lug kit, #2-600 kcmil	EDH-SIE-00694	1842
LK32750N2	primary	SIE	Power Mod modular metering main lug kit, 300-750 kcmil	EDH-SIE-00698	1842
LK33500	primary	SIE	Power Mod lug kit for MD/ND frame breaker, 4-lug	EDH-SIE-00672	1792
LK33500N2	primary	SIE	Power Mod modular metering main lug kit, 1/0-500 kcmil	EDH-SIE-00684	1842
LK33750	primary	SIE	Power Mod lug kit for MD/ND frame breaker, 4-lug	EDH-SIE-00674	1793
LK33750N2	primary	SIE	Power Mod modular metering main lug kit, 300-750 kcmil	EDH-SIE-00700	1843
LK33750N2E	primary	SIE	Power Mod modular metering main lug kit, 300-750 kcmil	EDH-SIE-00702	1843
LK34500	primary	SIE	Power Mod lug kit for MD/ND frame breaker, 4-lug	EDH-SIE-00676	1793
LK34500N2	primary	SIE	Power Mod modular metering main lug kit, 1/0-500 kcmil	EDH-SIE-00686	1843
LK34500N2E	primary	SIE	Power Mod modular metering main lug kit, 1/0-500 kcmil	EDH-SIE-00688	1843
LK35600N2	primary	SIE	Power Mod modular metering main lug kit, 1/0-600 kcmil	EDH-SIE-00690	1844
LK35750N2	primary	SIE	Power Mod modular metering main lug kit, 300-750 kcmil	EDH-SIE-00704	1844
LK36750N2	primary	SIE	Power Mod modular metering main lug kit, 1/0-750 kcmil	EDH-SIE-00706	1844
LKB4	primary	SIE	Super Blue Pennant main device load-side lug kit, 400 A (circuit breaker)	EDH-SIE-00719	1741

Number	Type	Mfr	Description	Catalogue ID	Pg
LKB6	primary	SIE	Super Blue Pennant main device load-side lug kit, 600 A (circuit breaker)	EDH-SIE-00720	1741
LKB8	primary	SIE	Super Blue Pennant main device load-side lug kit, 800 A (circuit breaker)	EDH-SIE-00721	1742
LKD1	primary	EAT	Eaton non-padlockable handle block, F-frame	EDH-EAT-01272	380
LKD3	primary	EAT	Eaton non-padlockable handle block, J, K-frame	EDH-EAT-01273	381
LKD4	primary	EAT	Eaton non-padlockable handle block, L, M, N-frame	EDH-EAT-01274	381
LKF4	primary	SIE	Super Blue Pennant main device load-side lug kit, 400 A (fusible switch)	EDH-SIE-00717	1742
LKF6	primary	SIE	Super Blue Pennant main device load-side lug kit, 600 A (fusible switch)	EDH-SIE-00718	1742
LMAP1600	primary	SIE	VL PG lug mounting assembly 1600	EDH-SIE-00635	1824
LN1E100	primary	SIE	Siemens LN1E100 lug, ED 30-100A	EDH-SIE-00258	1760
LN1-E100	alias	SIE	Siemens LN1E100 lug, ED 30-100A	EDH-SIE-00258	1760
LNLK30A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strip	EDH-SIE-00035	1645
LNLK30A	primary	SIE	Revised P1 2/0 neutral lug (strip) kit, 30-circuit	EDH-SIE-00317	1644
LNLK42A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	EDH-SIE-00036	1646
LNLK42A	primary	SIE	Revised P1 2/0 neutral lug (strip) kit, 42-circuit	EDH-SIE-00318	1645
LNLK4X11B	primary	SIE	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strip	EDH-SIE-00035	1645
LNLK54A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	EDH-SIE-00037	1648
LNLK54A	primary	SIE	Revised P1 2/0 neutral lug (strip) kit, 54-circuit	EDH-SIE-00319	1646
LNLK5X12A	primary	SIE	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]	EDH-SIE-00033	1646
LNLK6X17B	primary	SIE	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	EDH-SIE-00036	1646
LNLK7X18A	primary	SIE	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]	EDH-SIE-00034	1648
LNLK7X20B	primary	SIE	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	EDH-SIE-00037	1648
LP3RHP01	primary	SIE	Siemens 3R/12 hinge pin 0.188 in dia. steel zinc plated	EDH-SIE-00819	1685
LP9502	primary	SQD	Square D trim screws for 400-600 A panelboard fronts	EDH-SQD-00966	922
LP9503	primary	SQD	Quarter-turn fastener kit for NQ/NF/I-Line hinged trim fronts	EDH-SQD-00602	876
LP9618	primary	SQD	Key NSR-251 for Square D panelboard locks	EDH-SQD-00610	889
LPDC01	primary	SIE	Panelboard directory cards (10)	EDH-SIE-00392	1703
LPDC02	primary	SIE	Directory card holder (pack of 10)	EDH-SIE-00410	1516
LPHL	primary	EAT	Eaton Series G Padlockable handle lock hasp, LG	EDH-EAT-01300	386
LPHLOFF	primary	EAT	Eaton Series G Padlockable handle lock hasp OFF-only, LG	EDH-EAT-01303	386
LPJSPDNUT01	primary	SIE	Panelboard trim J-type speed nut kit (25)	EDH-SIE-00423	1686
LPKEY01A	primary	SIE	Siemens Key B363A for standard panelboard lock series 11-1895-0x / FAS-Latch	EDH-SIE-00816	1703
LPKEY01B	primary	SIE	Siemens Key B363A for standard panelboard lock / FAS-Latch	EDH-SIE-00817	1703
LPLOCK01A	primary	SIE	Replacement panelboard trim door lock (14 gage doors)	EDH-SIE-00393	1703
LPLOCK02A	primary	SIE	Replacement panelboard trim door lock (12 gage doors)	EDH-SIE-00394	1703
LPLOCK03A	primary	SIE	Siemens FAS-Latch replacement lock kit with two B363A keys	EDH-SIE-00818	1704
LPP2NB01	primary	SIE	Neutral lug kit	EDH-SIE-00118	1492
LPTS01	primary	SIE	Siemens Trim screw	EDH-SIE-00815	1686
LSDL	primary	SQD	Square D replacement cover directory label	EDH-SQD-00968	1052
LT2036F	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 36 in high (F suffix = flush)	EDH-EAT-01053	274
LT2036S	primary	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 36 in high (F suffix = flush)	EDH-EAT-01053	274
LT2042F	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 42 in high (F suffix = flush)	EDH-EAT-01055	274

Number	Type	Mfr	Description	Catalogue ID	Pg
LT2042S	primary	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 42 in high (F suffix = flush)	EDH-EAT-01055	274
LT2048F	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 48 in high (F suffix = flush)	EDH-EAT-01057	274
LT2048S	primary	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 48 in high (F suffix = flush)	EDH-EAT-01057	274
LT2060F	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 60 in high (F suffix = flush)	EDH-EAT-01059	275
LT2060S	primary	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 60 in high (F suffix = flush)	EDH-EAT-01059	275
LT2072F	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 72 in high (F suffix = flush)	EDH-EAT-01061	275
LT2072S	primary	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 72 in high (F suffix = flush)	EDH-EAT-01061	275
LT2090F	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 90 in high (F suffix = flush)	EDH-EAT-01063	275
LT2090S	primary	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 90 in high (F suffix = flush)	EDH-EAT-01063	275
LTC969S	primary	EAT	Pow-R-Line column (LX) standard surface trim, top fed, 69 in	EDH-EAT-01157	166
LTC969SB	primary	EAT	Pow-R-Line column (LX) standard surface trim, bottom fed, 69 in	EDH-EAT-01159	166
LTC978S	primary	EAT	Pow-R-Line column (LX) standard surface trim, top fed, 78 in	EDH-EAT-01162	166
LTC978SB	primary	EAT	Pow-R-Line column (LX) standard surface trim, bottom fed, 78 in	EDH-EAT-01164	167
LTC981S	primary	EAT	Pow-R-Line column (LX) standard surface trim, top fed, 81 in	EDH-EAT-01167	167
LTC981SB	primary	EAT	Pow-R-Line column (LX) standard surface trim, bottom fed, 81 in	EDH-EAT-01169	167
LTC990S	primary	EAT	Pow-R-Line column (LX) standard surface trim, top fed, 90 in	EDH-EAT-01172	167
LTC990SB	primary	EAT	Pow-R-Line column (LX) standard surface trim, bottom fed, 90 in	EDH-EAT-01174	167
LTCD969S	primary	EAT	Pow-R-Line column (LX) door-in-door surface trim, top fed, 69 in	EDH-EAT-01158	167
LTCD969SB	primary	EAT	Pow-R-Line column (LX) door-in-door surface trim, bottom fed, 69 in	EDH-EAT-01160	168
LTCD978S	primary	EAT	Pow-R-Line column (LX) door-in-door surface trim, top fed, 78 in	EDH-EAT-01163	168
LTCD978SB	primary	EAT	Pow-R-Line column (LX) door-in-door surface trim, bottom fed, 78 in	EDH-EAT-01165	168
LTCD981S	primary	EAT	Pow-R-Line column (LX) door-in-door surface trim, top fed, 81 in	EDH-EAT-01168	168
LTCD981SB	primary	EAT	Pow-R-Line column (LX) door-in-door surface trim, bottom fed, 81 in	EDH-EAT-01170	168
LTCD990S	primary	EAT	Pow-R-Line column (LX) door-in-door surface trim, top fed, 90 in	EDH-EAT-01173	168
LTCD990SB	primary	EAT	Pow-R-Line column (LX) door-in-door surface trim, bottom fed, 90 in	EDH-EAT-01175	169
LTDD2036S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 36 in high (F suffix = flush)	EDH-EAT-01053	274
LTDD2042S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 42 in high (F suffix = flush)	EDH-EAT-01055	274
LTDD2048S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 48 in high (F suffix = flush)	EDH-EAT-01057	274
LTDD2060S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 60 in high (F suffix = flush)	EDH-EAT-01059	275
LTDD2072S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 72 in high (F suffix = flush)	EDH-EAT-01061	275
LTDD2090S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 90 in high (F suffix = flush)	EDH-EAT-01063	275
LTF2036S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 36 in high (F suffix = flush)	EDH-EAT-01053	274

Number	Type	Mfr	Description	Catalogue ID	Pg
LTF2042S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 42 in high (F suffix = flush)	EDH-EAT-01055	274
LTF2048S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 48 in high (F suffix = flush)	EDH-EAT-01057	274
LTF2060S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 60 in high (F suffix = flush)	EDH-EAT-01059	275
LTF2072S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 72 in high (F suffix = flush)	EDH-EAT-01061	275
LTF2090S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 90 in high (F suffix = flush)	EDH-EAT-01063	275
LTS3K	primary	EAT	Series G LG-frame terminal cover, 3-pole	EDH-EAT-00558	693
LTS4K	primary	EAT	Series G LG-frame terminal cover, 4-pole	EDH-EAT-00559	694
LTV2036S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 36 in high (F suffix = flush)	EDH-EAT-01053	274
LTV2042S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 42 in high (F suffix = flush)	EDH-EAT-01055	274
LTV2048S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 48 in high (F suffix = flush)	EDH-EAT-01057	274
LTV2060S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 60 in high (F suffix = flush)	EDH-EAT-01059	275
LTV2072S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 72 in high (F suffix = flush)	EDH-EAT-01061	275
LTV2090S	equivalent	EAT	Pow-R-Line 1a/2a/3a standard trim, surface, 90 in high (F suffix = flush)	EDH-EAT-01063	275
LWPT2024	primary	EAT	Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 24 in high	EDH-EAT-01065	276
LWPT2036	primary	EAT	Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 36 in high	EDH-EAT-01067	276
LWPT2048	primary	EAT	Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 48 in high	EDH-EAT-01069	276
LWPT2060	primary	EAT	Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 60 in high	EDH-EAT-01071	276
LWPT2072	primary	EAT	Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 72 in high	EDH-EAT-01073	276
LWPT2090	primary	EAT	Type 12/3R trim for PRL1a/2a/3a, PRL1X/2X/3X, 90 in high	EDH-EAT-01075	277
LX-26TF	primary	SQD	Legacy 1970 NQO column-width screw-cover front LX-26TF / LX-26TS (column width 8	EDH-SQD-00819	891
LX-26TS	alias	SQD	Legacy 1970 NQO column-width screw-cover front LX-26TF / LX-26TS (column width 8	EDH-SQD-00819	891
LX-32TF	primary	SQD	Legacy 1970 NQO column-width screw-cover front LX-32TF / LX-32TS (column width 8	EDH-SQD-00820	891
LX-32TS	alias	SQD	Legacy 1970 NQO column-width screw-cover front LX-32TF / LX-32TS (column width 8	EDH-SQD-00820	891
LX-40TF	primary	SQD	Legacy 1970 NQO column-width screw-cover front LX-40TF / LX-40TS (column width 8	EDH-SQD-00821	892
LX-40TF / LX-40TS	alias	SQD	NQ column-width (single-row) front, 40 in box, surface	EDH-SQD-00703	854
LX40TS	primary	SQD	NQ column-width (single-row) front, 40 in box, surface	EDH-SQD-00703	854
LX-40TS	alias	SQD	Legacy 1970 NQO column-width screw-cover front LX-40TF / LX-40TS (column width 8	EDH-SQD-00821	892
LX-45TF	primary	SQD	Legacy 1970 NQO column-width screw-cover front LX-45TF / LX-45TS (column width)	EDH-SQD-00822	892
LX-45TF / LX-45TS	alias	SQD	NQ column-width (single-row) front, 45 in box, surface	EDH-SQD-00704	854
LX45TS	primary	SQD	NQ column-width (single-row) front, 45 in box, surface	EDH-SQD-00704	854
LX-45TS	alias	SQD	Legacy 1970 NQO column-width screw-cover front LX-45TF / LX-45TS (column width)	EDH-SQD-00822	892
LX-49TF	primary	SQD	Legacy 1970 NQO column-width screw-cover front LX-49TF / LX-49TS (column width 8	EDH-SQD-00823	892
LX-49TS	alias	SQD	Legacy 1970 NQO column-width screw-cover front LX-49TF / LX-49TS (column width 8	EDH-SQD-00823	892
LX58TS	primary	SQD	NQ column-width (single-row) front, 58 in box, surface	EDH-SQD-00705	854
LX62TS	primary	SQD	NQ column-width (single-row) front, 62 in box, surface	EDH-SQD-00706	854
M50ASB324R	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 200 A, 250 V, single mount (6X)	EDH-EAT-00984	132

Number	Type	Mfr	Description	Catalogue ID	Pg
M50ASB364R	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 200 A, 600 V, single mount (6X)	EDH-EAT-00985	132
M50ASW325R	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 400 A, 250 V, single mount (9X)	EDH-EAT-00986	133
M50ASW326R	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 600 A, 250 V, single mount (11X)	EDH-EAT-00988	133
M50ASW365R	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 400 A, 600 V, single mount (9X)	EDH-EAT-00987	133
M50ASW366R	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 600 A, 600 V, single mount (11X)	EDH-EAT-00989	134
M50ASW367B	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 800 A, 600 V (bottom mounted), sing	EDH-EAT-00991	134
M50ASW367T	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 800 A, 600 V (top mounted), single	EDH-EAT-00990	135
M50ASW368B	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 1200 A, 600 V (bottom mounted), sin	EDH-EAT-00993	135
M50ASW368T	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 1200 A, 600 V (top mounted), single	EDH-EAT-00992	136
M50ATW3211R	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 30/30 A, 250 V, twin mount (4X)	EDH-EAT-00978	136
M50ATW3222R	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 60/60 A, 250 V, twin mount (4X)	EDH-EAT-00980	136
M50ATW3233R	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 100/100 A, 250 V, twin mount (4X)	EDH-EAT-00982	137
M50ATW3611R	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 30/30 A, 600 V, twin mount (4X)	EDH-EAT-00979	137
M50ATW3622R	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 60/60 A, 600 V, twin mount (4X)	EDH-EAT-00981	137
M50ATW3633R	primary	EAT	MP100 / MP2 M50 fusible switch retrofit kit, 100/100 A, 600 V, twin mount (5X)	EDH-EAT-00983	138
MA8K	alias	OTH	Aftermarket bus connection kit BCDPMACH (seller cross-ref to EAT KCDPMA)	EDH-OTH-00034	84
MB120	primary	SIE	Siemens BQ/BQH mounting clips, 1P	EDH-SIE-00767	1686
MB133	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB133	EDH-GEA-00059	1055
MB133WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB133WB	EDH-GEA-00060	1055
MB233	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB233	EDH-GEA-00051	1056
MB2332	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB2332	EDH-GEA-00053	1056
MB2332WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB2332WB	EDH-GEA-00054	1056
MB233WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB233WB	EDH-GEA-00052	1057
MB332	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB332	EDH-GEA-00045	1057
MB332WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB332WB	EDH-GEA-00046	1057
MB333	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB333	EDH-GEA-00055	1058
MB333WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB333WB	EDH-GEA-00056	1058
MB423	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB423	EDH-GEA-00057	1058
MB426	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB426	EDH-GEA-00058	1059
MB512	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB512	EDH-GEA-00044	1059
MB513	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB513	EDH-GEA-00049	1059
MB516	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB516	EDH-GEA-00050	1060
MB612	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB612	EDH-GEA-00042	1060
MB613	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB613	EDH-GEA-00047	1060
MB614	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB614	EDH-GEA-00043	1061
MB616	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB616	EDH-GEA-00048	1061
MB9301	primary	SIE	Connect-All mounting block assembly, PD frame	EDH-SIE-00520	1805
MBKBC1NBA	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	1621
MBKBC1NBA	primary	SIE	Revised P1 BQD/GB main/subfeed breaker kit, 1-phase	EDH-SIE-00366	1612
MBKBC3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A	EDH-SIE-00045	1473

Number	Type	Mfr	Description	Catalogue ID	Pg
MBKBC3NBA	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	1622
MBKBC3NBA	primary	SIE	Revised P1 BQD/GB main/subfeed breaker kit, 3-phase	EDH-SIE-00367	1612
MBKBFA	primary	SIE	P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)	EDH-SIE-00014	1684
MBKBL1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A	EDH-SIE-00043	1473
MBKBL1A	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	1621
MBKBL1A	primary	SIE	Revised P1 BL main/subfeed breaker kit, 1-phase	EDH-SIE-00364	1613
MBKBL3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A	EDH-SIE-00044	1473
MBKBL3A	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	1622
MBKBL3A	primary	SIE	Revised P1 BL main/subfeed breaker kit, 3-phase	EDH-SIE-00365	1613
MBKED1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A	EDH-SIE-00048	1474
MBKED1A	primary	SIE	Revised P1 main/subfeed strap kit, ED, 1-ph, 125A	EDH-SIE-00003	1613
MBKED1*A / MBKED3***A = kit with ED breaker factory-installed**	equivalent	SIE	Revised P1 main/subfeed strap kit, ED, 1-ph, 125A	EDH-SIE-00003	1613
MBKED1*A / MBKED3***A = kit with ED breaker factory-installed**	equivalent	SIE	Revised P1 main/subfeed strap kit, ED, 3-ph, 125A	EDH-SIE-00004	1614
MBKED3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A	EDH-SIE-00049	1474
MBKED3A	primary	SIE	Revised P1 main/subfeed strap kit, ED, 3-ph, 125A	EDH-SIE-00004	1614
MBKFD1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A	EDH-SIE-00052	1474
MBKFD1A	primary	SIE	Revised P1 main/subfeed strap kit, FD, 1-ph, 250A	EDH-SIE-00007	1615
MBKFD1*A / MBKFD3***A = same kit with FD breaker (amperage ***) factory-installed on barrier**	equivalent	SIE	Revised P1 main/subfeed strap kit, FD, 1-ph, 250A	EDH-SIE-00007	1615
MBKFD1*A / MBKFD3***A = same kit with FD breaker (amperage ***) factory-installed on barrier**	equivalent	SIE	Revised P1 main/subfeed strap kit, FD, 3-ph, 250A	EDH-SIE-00008	1615
MBKFD3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A	EDH-SIE-00053	1475
MBKFD3A	primary	SIE	Revised P1 main/subfeed strap kit, FD, 3-ph, 250A	EDH-SIE-00008	1615
MBKJD1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	EDH-SIE-00054	1475
MBKJD1A	supersedes	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	1617
MBKJD1A	primary	SIE	Revised P1-400 JD main breaker kit, 1-phase	EDH-SIE-00326	1617
MBKJD1*A, MBKJD12***A = JD kits with breaker (amperage ***), incl. bottom-feed variants**	equivalent	SIE	Revised P1-400 JD main breaker kit, 1-phase	EDH-SIE-00326	1617
MBKJD3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	EDH-SIE-00055	1476
MBKJD3A	supersedes	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	1617
MBKJD3A	primary	SIE	Revised P1-400 JD main breaker kit, 3-phase	EDH-SIE-00327	1617
MBKJD3*A, MBKJD32***A = JD kits with breaker (amperage ***), incl. bottom-feed variants**	equivalent	SIE	Revised P1-400 JD main breaker kit, 3-phase	EDH-SIE-00327	1617

Number	Type	Mfr	Description	Catalogue ID	Pg
MBKJD3B	primary	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	1617
MBKNB1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A	EDH-SIE-00046	1476
MBKNB3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A	EDH-SIE-00047	1476
MBKQJ1A	primary	SIE	Revised P1 QJ main/subfeed breaker kit, 1-phase 2/3-wire	EDH-SIE-00443	1618
MBKQJ1*A**	equivalent	SIE	Revised P1 QJ main/subfeed breaker kit, 1-phase 2/3-wire	EDH-SIE-00443	1618
MBKQJ3	primary	SIE	Original P1 main/subfeed strap kit MBKQJ3 (3-pole QJ/HQJ) - per seller listing	EDH-SIE-00752	1477
MBKQJ3A	primary	SIE	Revised P1 QJ main/subfeed breaker kit, 3-phase 3/4-wire	EDH-SIE-00444	1619
MBKQJ3*A**	equivalent	SIE	Revised P1 QJ main/subfeed breaker kit, 3-phase 3/4-wire	EDH-SIE-00444	1619
MBKQR1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A	EDH-SIE-00050	1477
MBKQR1A	primary	SIE	Revised P1 main/subfeed strap kit, QR, 1-ph, 225A	EDH-SIE-00005	1619
MBKQR*1A**	equivalent	SIE	Revised P1 main/subfeed strap kit, QR, 1-ph, 225A	EDH-SIE-00005	1619
MBKQR3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A	EDH-SIE-00051	1478
MBKQR3A	primary	SIE	Revised P1 main/subfeed strap kit, QR, 3-ph, 225A	EDH-SIE-00006	1620
MBKQR*3A**	equivalent	SIE	Revised P1 main/subfeed strap kit, QR, 3-ph, 225A	EDH-SIE-00006	1620
MBKQRC1FK	primary	SIE	Column (C1) panelboard filler kit for vertically mounted 225A QR main/subfeed	EDH-SIE-00374	1708
MBKQRFK	primary	SIE	P1 / Revised P1 deadfront filler for 1PH/3PH QR main	EDH-SIE-00075	1679
MBKVA41A	primary	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	1621
MBKVA41B	primary	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	1622
MBKVA5262A	primary	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A	EDH-SIE-00009	1623
MBKVA5262B	primary	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A	EDH-SIE-00010	1623
MBKVA5262B (strap kit without breaker)	equivalent	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM31	EDH-SIE-00368	1626
MBKVA5262B (strap kit without breaker)	equivalent	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM32	EDH-SIE-00369	1626
MBKVA5262B (strap kit without breaker)	equivalent	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM32	EDH-SIE-00370	1627
MBKVA5262B (strap kit without breaker)	equivalent	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM32	EDH-SIE-00371	1627
MBKVA5262B (strap kit without breaker)	equivalent	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH32	EDH-SIE-00372	1625
MBKVA5262B (strap kit without breaker)	equivalent	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH32	EDH-SIE-00373	1626
MBKVA5363A	primary	SIE	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph	EDH-SIE-00011	1624
MBKVA5363JD	primary	SIE	RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)	EDH-SIE-00013	1687
MBKVAH3200A	primary	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH32	EDH-SIE-00372	1625
MBKVAH3250A	primary	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH32	EDH-SIE-00373	1626
MBKVAM3150A	primary	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM31	EDH-SIE-00368	1626
MBKVAM3200A	primary	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM32	EDH-SIE-00369	1626
MBKVAM3225A	primary	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM32	EDH-SIE-00370	1627
MBKVAM3250A	primary	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM32	EDH-SIE-00371	1627
MBPG1600	primary	SIE	VL PG breaker mounting base 1600	EDH-SIE-00633	1818
MBPG1601	primary	SIE	VL PG breaker mounting base 1601	EDH-SIE-00634	1818
MBR9302	primary	SIE	Connect-All mounting block assembly, RD frame	EDH-SIE-00521	1806

Number	Type	Mfr	Description	Catalogue ID	Pg
MCHK	primary	SIE	Siemens Metal card holder kit	EDH-SIE-00814	1704
MD4K	alias	OTH	Aftermarket bus connection kit BPRLMDCH (seller cross-ref to EAT KPRL4MD)	EDH-OTH-00019	434
MDC-38TF	primary	SQD	Legacy 1970 NQO MONO-FLAT front MDC-38TF / MDC-38TS (20 in W x 5-3/4 in D x 38 i	EDH-SQD-00809	893
MDC-38TS	alias	SQD	Legacy 1970 NQO MONO-FLAT front MDC-38TF / MDC-38TS (20 in W x 5-3/4 in D x 38 i	EDH-SQD-00809	893
MDC-41TF	primary	SQD	Legacy 1970 NQO MONO-FLAT front MDC-41TF / MDC-41TS (20 in W x 5-3/4 in D x 41 i	EDH-SQD-00810	893
MDC-41TS	alias	SQD	Legacy 1970 NQO MONO-FLAT front MDC-41TF / MDC-41TS (20 in W x 5-3/4 in D x 41 i	EDH-SQD-00810	893
MDC-50TF	primary	SQD	Legacy 1970 NQO MONO-FLAT front MDC-50TF / MDC-50TS (20 in W x 5-3/4 in D x 50 i	EDH-SQD-00811	893
MDC-50TS	alias	SQD	Legacy 1970 NQO MONO-FLAT front MDC-50TF / MDC-50TS (20 in W x 5-3/4 in D x 50 i	EDH-SQD-00811	893
MDC-53TF	primary	SQD	Legacy 1970 NQO MONO-FLAT front MDC-53TF / MDC-53TS (20 in W x 5-3/4 in D x 53 i	EDH-SQD-00812	894
MDC-53TS	alias	SQD	Legacy 1970 NQO MONO-FLAT front MDC-53TF / MDC-53TS (20 in W x 5-3/4 in D x 53 i	EDH-SQD-00812	894
MDTERMSHIELD	primary	SIE	Siemens MDTERMSHIELD terminal shield, MD/ND/PD/RD 3-pole	EDH-SIE-00298	1799
Mechanical: 100 A G01-G04, 250-600 A G13-G16; Crimp: 100 A G05-G08, 250-600 A G17-G20; Copper lugs: 100 A G09-G12, 250-600 A G21-G24 (order tin Al / bare Cu / silver Cu / tin Cu)	style_number	EAT	PRL3a/PRL3X service entrance bonding jumper kit	EDH-EAT-00220	371
Mechanical main lugs/main breakers: 100-225 A G01 (tin Al) G02 (bare Cu) G03 (silver Cu) G04 (tin Cu); 400-600 A G05-G08. Crimp main lugs: 100-225 A G09-G12; 400-600 A G13-G16. Copper main lugs: 100-225 A G18-G20; 400-600 A G22-G24	style_number	EAT	PRL1a/2a/1X/2X service entrance bonding jumper kit	EDH-EAT-00219	287
MG1	primary	SIE	MG1 connecting strap kit - VL MG (8.75in, single)	EDH-SIE-00149	1525
MG1D	primary	SIE	MG1D connecting strap kit - VL MG (8.75in, single)	EDH-SIE-00175	1525
MH23	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 23 in H	EDH-SQD-00632	916
MH23WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 23 in H (NQ/NF)	EDH-SQD-00652	916
MH26	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 26 in H	EDH-SQD-00633	861
MH26BE	alias	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 26 in H	EDH-SQD-00633	861
MH26WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 26 in H (NQ/NF)	EDH-SQD-00653	861
MH29	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 29 in H	EDH-SQD-00634	916
MH29WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 29 in H (NQ/NF)	EDH-SQD-00654	916
MH32	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 32 in H	EDH-SQD-00635	861
MH32BE	alias	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 32 in H	EDH-SQD-00635	861
MH32WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 32 in H (NQ/NF)	EDH-SQD-00655	862
MH35	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 35 in H	EDH-SQD-00636	917
MH35WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 35 in H (NQ/NF)	EDH-SQD-00656	917
MH38	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 38 in H	EDH-SQD-00637	862
MH38BE	alias	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 38 in H	EDH-SQD-00637	862
MH38WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 38 in H (NQ/NF)	EDH-SQD-00657	862
MH41	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 41 in H	EDH-SQD-00638	917
MH41WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 41 in H (NQ/NF)	EDH-SQD-00658	917

Number	Type	Mfr	Description	Catalogue ID	Pg
MH44	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 44 in H	EDH-SQD-00639	863
MH44BE	alias	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 44 in H	EDH-SQD-00639	863
MH44WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 44 in H (NQ/NF)	EDH-SQD-00659	863
MH50	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 50 in H	EDH-SQD-00640	863
MH50BE	alias	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 50 in H	EDH-SQD-00640	863
MH50WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 50 in H (NQ/NF)	EDH-SQD-00660	864
MH53	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 53 in H	EDH-SQD-00641	918
MH53WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 53 in H (NQ/NF)	EDH-SQD-00661	918
MH56	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 56 in H	EDH-SQD-00642	864
MH56BE	alias	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 56 in H	EDH-SQD-00642	864
MH56WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 56 in H (NQ/NF)	EDH-SQD-00662	864
MH59	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 59 in H	EDH-SQD-00643	918
MH59WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 59 in H (NQ/NF)	EDH-SQD-00663	918
MH62	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 62 in H	EDH-SQD-00644	865
MH62BE	alias	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 62 in H	EDH-SQD-00644	865
MH62D9	primary	SQD	MH box, 20 in. W x 8.75 in. D x 62 in. H (D9, for PowerPacT L)	EDH-SQD-00136	865
MH62D9VWP	primary	SQD	MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 62 in H	EDH-SQD-00675	865
MH62WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 62 in H (NQ/NF)	EDH-SQD-00664	866
MH65	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 65 in H	EDH-SQD-00645	919
MH656WP	primary	SQD	MH weatherproof enclosure for 600 A NQOD interior (MH656WP)	EDH-SQD-00671	919
MH65WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 65 in H (NQ/NF)	EDH-SQD-00665	919
MH68	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 68 in H	EDH-SQD-00646	866
MH686WP	primary	SQD	MH weatherproof enclosure for 600 A NQOD interior (MH686WP)	EDH-SQD-00672	919
MH68BE	alias	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 68 in H	EDH-SQD-00646	866
MH68D9	primary	SQD	MH box, 20 in. W x 8.75 in. D x 68 in. H (D9, for PowerPacT L)	EDH-SQD-00137	866
MH68D9VWP	primary	SQD	MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 68 in H	EDH-SQD-00676	867
MH68WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 68 in H (NQ/NF)	EDH-SQD-00666	867
MH716WP	primary	SQD	MH weatherproof enclosure for 600 A NQOD interior (MH716WP)	EDH-SQD-00673	920
MH74	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 74 in H	EDH-SQD-00647	867
MH746WP	primary	SQD	MH weatherproof enclosure for 600 A NQOD interior (MH746WP)	EDH-SQD-00674	920
MH74BE	alias	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 74 in H	EDH-SQD-00647	867
MH74D9	primary	SQD	MH box, 20 in. W x 8.75 in. D x 74 in. H (D9, for PowerPacT L)	EDH-SQD-00138	868
MH74D9VWP	primary	SQD	MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 74 in H	EDH-SQD-00677	868
MH74WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 74 in H (NQ/NF)	EDH-SQD-00667	868
MH77	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 77 in H	EDH-SQD-00648	920
MH77WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 77 in H (NQ/NF)	EDH-SQD-00668	920
MH80	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 80 in H	EDH-SQD-00649	868
MH80BE	alias	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 80 in H	EDH-SQD-00649	868
MH80D9	primary	SQD	MH box, 20 in. W x 8.75 in. D x 80 in. H (D9, for PowerPacT L)	EDH-SQD-00139	869
MH80D9VWP	primary	SQD	MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 80 in H	EDH-SQD-00678	869
MH80WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 80 in H (NQ/NF)	EDH-SQD-00669	869
MH86	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 86 in H	EDH-SQD-00650	869
MH86BE	alias	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 86 in H	EDH-SQD-00650	869
MH86D9	primary	SQD	MH box, 20 in. W x 8.75 in. D x 86 in. H (D9, for PowerPacT L)	EDH-SQD-00140	870
MH86D9VWP	primary	SQD	MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 86 in H	EDH-SQD-00679	870
MH86WP	primary	SQD	MH weatherproof enclosure Type 3R/5/12, 86 in H (NQ/NF)	EDH-SQD-00670	870

Number	Type	Mfr	Description	Catalogue ID	Pg
MH92	primary	SQD	MH NEMA 1 panelboard box, 20 in W x 5.75 in D x 92 in H	EDH-SQD-00651	870
MH92D9	primary	SQD	MH box, 20 in. W x 8.75 in. D x 92 in. H (D9, for PowerPacT L)	EDH-SQD-00141	871
MH92D9VWP	primary	SQD	MH vented NEMA 3R weatherproof enclosure, 26 in W x 8.75 in D, 92 in H	EDH-SQD-00680	871
MHBE20	primary	SQD	Blank endwall for 20 in. wide MH enclosure (one per package)	EDH-SQD-00132	871
MHBE26	primary	SQD	Blank endwall, 26 in. wide MH enclosure (one per package)	EDH-SQD-00135	871
MHC23	primary	SQD	NQOD MONO-FLAT front for MH23 box (F/S)	EDH-SQD-00716	908
MHC26	primary	SQD	NQOD MONO-FLAT front for MH26 box (F/S)	EDH-SQD-00717	908
MHC29	primary	SQD	NQOD MONO-FLAT front for MH29 box (F/S)	EDH-SQD-00718	908
MHC32	primary	SQD	NQOD MONO-FLAT front for MH32 box (F/S)	EDH-SQD-00719	909
MHC35	primary	SQD	NQOD MONO-FLAT front for MH35 box (F/S)	EDH-SQD-00720	909
MHC38	primary	SQD	NQOD MONO-FLAT front for MH38 box (F/S)	EDH-SQD-00721	909
MHC41	primary	SQD	NQOD MONO-FLAT front for MH41 box (F/S)	EDH-SQD-00722	909
MHC44	primary	SQD	NQOD MONO-FLAT front for MH44 box (F/S)	EDH-SQD-00723	910
MHC50	primary	SQD	NQOD MONO-FLAT front for MH50 box (F/S)	EDH-SQD-00724	910
MHC50V	primary	SQD	NQOD MONO-FLAT front for MH50 box (F/S)	EDH-SQD-00726	910
MHC53V	primary	SQD	NQOD MONO-FLAT front for MH53 box (F/S)	EDH-SQD-00727	910
MHC56	primary	SQD	NQOD MONO-FLAT front for MH56 box (F/S)	EDH-SQD-00725	911
MHC56V	primary	SQD	NQOD MONO-FLAT front for MH56 box (F/S)	EDH-SQD-00728	911
MHC59V	primary	SQD	NQOD MONO-FLAT front for MH59 box (F/S)	EDH-SQD-00729	911
MHC62V	primary	SQD	NQOD MONO-FLAT front for MH62 box (F/S)	EDH-SQD-00730	911
MHC65V	primary	SQD	NQOD MONO-FLAT front for MH65 box (F/S)	EDH-SQD-00731	912
MHC68V	primary	SQD	NQOD MONO-FLAT front for MH68 box (F/S)	EDH-SQD-00732	912
MHC74V	primary	SQD	NQOD MONO-FLAT front for MH74 box (F/S)	EDH-SQD-00733	912
MHC77V	primary	SQD	NQOD MONO-FLAT front for MH77 box (F/S)	EDH-SQD-00734	912
MHCO20	primary	SQD	NF/NQ rectangular cutout endwall kit for 20 in. wide NEMA 1 MH enclosure	EDH-SQD-00134	871
MHCOEW20A	primary	SQD	Endwall and closing plate replacement kit, 20 in MH enclosure (NQ/NF)	EDH-SQD-00603	872
MHCOEW20F	primary	SQD	Endwall and closing plate replacement kit, 20 in MH enclosure (NQ/NF)	EDH-SQD-00604	872
MHKE20	primary	SQD	Endwall with knockouts for 20 in. wide MH enclosure (one per package)	EDH-SQD-00133	872
MHT2DH20	primary	SQD	Drip hood for 20 in wide MH enclosures (NF)	EDH-SQD-00605	814
ML1997	primary	SQD	ML-1 panel unknown mounting hardware for 997 frame breaker	EDH-SQD-00539	782
ML1FAS	primary	SQD	ML-1 panel single mounting hardware for FAP/FAL breaker	EDH-SQD-00538	782
ML1KAPT	primary	SQD	ML-1 panel twin mounting hardware for KAP breaker	EDH-SQD-00533	782
ML1LAPS	primary	SQD	ML-1 panel single mounting hardware for LAP breaker	EDH-SQD-00535	783
ML1LAPT	primary	SQD	ML-1 panel twin mounting hardware for LAP breaker	EDH-SQD-00534	783
ML1LAT	primary	SQD	ML-1 panel twin mounting hardware for LA breaker	EDH-SQD-00536	783
ML1MAPS	primary	SQD	ML-1 panel single mounting hardware for MAP breaker	EDH-SQD-00537	783
MLA1	primary	GEA	A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)	EDH-GEA-00061	1062
MLA2	primary	GEA	A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)	EDH-GEA-00062	1062
MLA41	primary	GEA	A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)	EDH-GEA-00063	1062
MLA61	primary	GEA	A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)	EDH-GEA-00064	1063
MLA62	primary	GEA	A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)	EDH-GEA-00065	1063
MLKA1	equivalent	SIE	Revised P1 250A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00015	1631
MLKA1	primary	SIE	Original P1 250A main lug kit, 1-ph	EDH-SIE-00025	1480
MLKA1A	primary	SIE	Revised P1 250A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00015	1631
MLKA3	equivalent	SIE	Revised P1 250A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00016	1632
MLKA3	primary	SIE	Original P1 250A main lug kit, 3-ph	EDH-SIE-00026	1480
MLKA3A	primary	SIE	Revised P1 250A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00016	1632

Number	Type	Mfr	Description	Catalogue ID	Pg
MLKC1	equivalent	SIE	Revised P1 250A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00017	1633
MLKC1	primary	SIE	Original P1 250A main lug kit, 1-ph	EDH-SIE-00027	1481
MLKC1A	primary	SIE	Revised P1 250A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00017	1633
MLKC3	equivalent	SIE	Revised P1 250A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00018	1633
MLKC3	primary	SIE	Original P1 250A main lug kit, 3-ph	EDH-SIE-00028	1481
MLKC3A	primary	SIE	Revised P1 250A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00018	1633
ML-LAL-S	primary	SQD	ML-1 panel single? mounting hardware for LAP (title says single, spec says twin)	EDH-SQD-00540	784
MLR1	primary	GEA	A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)	EDH-GEA-00066	1063
MLR2	primary	GEA	A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)	EDH-GEA-00067	1063
MLR41	primary	GEA	A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)	EDH-GEA-00068	1064
MLR61	primary	GEA	A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)	EDH-GEA-00069	1064
MLT1	primary	GEA	A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)	EDH-GEA-00070	1064
MLT2	primary	GEA	A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)	EDH-GEA-00071	1064
MLT41	primary	GEA	A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)	EDH-GEA-00073	1065
MLT42	primary	GEA	A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)	EDH-GEA-00072	1065
MM9301	primary	SIE	Connect-All mounting block assembly, PM frame	EDH-SIE-00522	1805
MM9302	primary	SIE	Connect-All mounting block assembly, PM frame	EDH-SIE-00523	1806
MN6BL	primary	SIE	Siemens Handle blocking device for All MD, ND, PD, RD	EDH-SIE-00793	1698
MN6PLD	primary	SIE	Siemens Padlocking device (OFF) for All MD, ND, PD, RD	EDH-SIE-00787	1702
MP100FC-_X	primary	EAT	MP100 filler cover, any 1X increment (MP100FC-_X)	EDH-EAT-00994	131
MP403XBLANK	primary	EAT	Cutler-Hammer MP40 3X high filler blank	EDH-EAT-00897	145
MP40CHH	primary	EAT	Cutler-Hammer MP40 hardware kit for CHH breakers (twin, 225 A)	EDH-EAT-00896	139
MP40ED225-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, ED, FD, HFD, 225 A	EDH-EAT-00889	140
MP40ED2253	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, ED, FD, HFD, 225 A	EDH-EAT-00889	140
MP40FC-_X	primary	EAT	MP40 filler cover, any 1X increment (MP40FC-_X, fill in size)	EDH-EAT-00976	145
MP40KC225-2	primary	EAT	MP40 / MP2 breaker connector kit, CC, CCH, 2-pole, 225 A max, twin mount (2X)	EDH-EAT-00972	140
MP40KC225-2H	alias	EAT	MP40 / MP2 breaker connector kit, CC, CCH, 2-pole, 225 A max, twin mount (2X)	EDH-EAT-00972	140
MP40KC225-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, CA, CAH, HCA, 225 A	EDH-EAT-00888	75
MP40KC2253	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, CA, CAH, HCA, 225 A	EDH-EAT-00888	75
MP40KC225-3H	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, CA, CAH, HCA, 225 A	EDH-EAT-00888	75
MP40KCHH225-2	primary	EAT	MP40 / MP2 breaker connector kit, CHH, 2-pole, 225 A max, twin mount (2X)	EDH-EAT-00973	141
MP40KCHH225-2H	alias	EAT	MP40 / MP2 breaker connector kit, CHH, 2-pole, 225 A max, twin mount (2X)	EDH-EAT-00973	141
MP40KCHH225-3	primary	EAT	MP40 / MP2 breaker connector kit, CHH, 3-pole, 225 A max, twin mount (3X)	EDH-EAT-00974	141
MP40KCHH225-3H	alias	EAT	MP40 / MP2 breaker connector kit, CHH, 3-pole, 225 A max, twin mount (3X)	EDH-EAT-00974	141
MP40KF100-2	primary	EAT	MP40 / MP2 breaker connector kit, EHD, FDB, FD, HFD, FDC, 2-pole, 100 A max, twi	EDH-EAT-00969	142
MP40KF100-2H	alias	EAT	MP40 / MP2 breaker connector kit, EHD, FDB, FD, HFD, FDC, 2-pole, 100 A max, twi	EDH-EAT-00969	142
MP40KF100-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, EHB, FS, FB, FH, EHD, FDB,	EDH-EAT-00887	76
MP40KF1003	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, EHB, FS, FB, FH, EHD, FDB,	EDH-EAT-00887	76
MP40KF100-3H	primary	EAT	MP40 hardware-only kit for MP40KF100-3 (example of "H" suffix)	EDH-EAT-00977	146

Number	Type	Mfr	Description	Catalogue ID	Pg
MP40KF225-2	primary	EAT	MP40 / MP2 breaker connector kit, FDB, FD, HFD, FDC, ED, EHD, EDC, 2-pole, 225 A	EDH-EAT-00970	142
MP40KF225-2H	alias	EAT	MP40 / MP2 breaker connector kit, FDB, FD, HFD, FDC, ED, EHD, EDC, 2-pole, 225 A	EDH-EAT-00970	142
MP40KF225-3	primary	EAT	MP40 / MP2 breaker connector kit, FDB, FD, HFD, FDC, ED, EHD, EDC, 3-pole, 225 A	EDH-EAT-00971	143
MP40KF225-3H	alias	EAT	MP40 / MP2 breaker connector kit, FDB, FD, HFD, FDC, ED, EHD, EDC, 3-pole, 225 A	EDH-EAT-00971	143
MP40KJ225-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, JB, KB, JD, HKB, 225 A	EDH-EAT-00890	77
MP40KJ2253	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, JB, KB, JD, HKB, 225 A	EDH-EAT-00890	77
MP40KJ225-3H	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, JB, KB, JD, HKB, 225 A	EDH-EAT-00890	77
MP40KK400-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, KA, KS, KH, LB, HLB (Relect	EDH-EAT-00891	77
MP40KK4003	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, KA, KS, KH, LB, HLB (Relect	EDH-EAT-00891	77
MP40KK400-3H	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, KA, KS, KH, LB, HLB (Relect	EDH-EAT-00891	77
MP40KL400-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 400 A	EDH-EAT-00892	143
MP40KL4003	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 400 A	EDH-EAT-00892	143
MP40KL600-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 600 A	EDH-EAT-00893	78
MP40KL600-3H	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 600 A	EDH-EAT-00893	78
MP40KLL400-3	primary	EAT	MP40 / MP2 breaker connector kit, LCL, 3-pole, 400 A max, single mount (6X)	EDH-EAT-00975	144
MP40KLL400-3H	alias	EAT	MP40 / MP2 breaker connector kit, LCL, 3-pole, 400 A max, single mount (6X)	EDH-EAT-00975	144
MP40KM800-3	primary	EAT	Cutler-Hammer MP40 single branch breaker mounting kit, MA, MS, MC, MD, 800 A	EDH-EAT-00894	79
MP40KM8003	alias	EAT	Cutler-Hammer MP40 single branch breaker mounting kit, MA, MS, MC, MD, 800 A	EDH-EAT-00894	79
MP40KM800-3H	alias	EAT	Cutler-Hammer MP40 single branch breaker mounting kit, MA, MS, MC, MD, 800 A	EDH-EAT-00894	79
MP40KN1200-3	primary	EAT	Cutler-Hammer MP40 single branch breaker mounting kit, NB, NS, NC, ND, 1200 A	EDH-EAT-00895	80
MP40KN12003	alias	EAT	Cutler-Hammer MP40 single branch breaker mounting kit, NB, NS, NC, ND, 1200 A	EDH-EAT-00895	80
MP40KN1200-3H	alias	EAT	Cutler-Hammer MP40 single branch breaker mounting kit, NB, NS, NC, ND, 1200 A	EDH-EAT-00895	80
MPED1K	primary	EAT	Cutler-Hammer MP-series dual-branch connector kit, 225 A, 600 V (E/F frame)	EDH-EAT-00898	144
MPX81542	primary	SQD	Pull box with solid neutral, 42 terminals, column-width NQ/NF	EDH-SQD-00715	872
MSC-23TF	primary	SQD	Legacy 1970 NQOB MONO-FLAT front MSC-23TF / MSC-23TS (20 in W x 5-3/4 in D x 23	EDH-SQD-00813	894
MSC-23TS	alias	SQD	Legacy 1970 NQOB MONO-FLAT front MSC-23TF / MSC-23TS (20 in W x 5-3/4 in D x 23	EDH-SQD-00813	894
MSC-26TF	primary	SQD	Legacy 1970 NQOB MONO-FLAT front MSC-26TF / MSC-26TS (20 in W x 5-3/4 in D x 26	EDH-SQD-00814	894
MSC-26TS	alias	SQD	Legacy 1970 NQOB MONO-FLAT front MSC-26TF / MSC-26TS (20 in W x 5-3/4 in D x 26	EDH-SQD-00814	894
MSC-29TF	primary	SQD	Legacy 1970 NQOB MONO-FLAT front MSC-29TF / MSC-29TS (20 in W x 5-3/4 in D x 29	EDH-SQD-00815	895
MSC-29TS	alias	SQD	Legacy 1970 NQOB MONO-FLAT front MSC-29TF / MSC-29TS (20 in W x 5-3/4 in D x 29	EDH-SQD-00815	895
MSC-35TF	primary	SQD	Legacy 1970 NQOB MONO-FLAT front MSC-35TF / MSC-35TS (20 in W x 5-3/4 in D x 35	EDH-SQD-00816	895

Number	Type	Mfr	Description	Catalogue ID	Pg
MSC-35TS	alias	SQD	Legacy 1970 NQOB MONO-FLAT front MSC-35TF / MSC-35TS (20 in W x 5-3/4 in D x 35	EDH-SQD-00816	895
MSC-38TF	primary	SQD	Legacy 1970 NQOB MONO-FLAT front MSC-38TF / MSC-38TS (20 in W x 5-3/4 in D x 38	EDH-SQD-00817	895
MSC-38TS	alias	SQD	Legacy 1970 NQOB MONO-FLAT front MSC-38TF / MSC-38TS (20 in W x 5-3/4 in D x 38	EDH-SQD-00817	895
MSC-44TF	primary	SQD	Legacy 1970 NQOB MONO-FLAT front MSC-44TF / MSC-44TS (20 in W x 5-3/4 in D x 44	EDH-SQD-00818	896
MSC-44TS	alias	SQD	Legacy 1970 NQOB MONO-FLAT front MSC-44TF / MSC-44TS (20 in W x 5-3/4 in D x 44	EDH-SQD-00818	896
MSE6-100	primary	SIE	E/ED frame breaker mounting screw kit	EDH-SIE-00471	1765
MSE6100	alias	SIE	E/ED frame breaker mounting screw kit	EDH-SIE-00471	1765
MSF6-50	primary	SIE	FD/FM frame breaker mounting screw kit	EDH-SIE-00480	1771
MSF650	alias	SIE	FD/FM frame breaker mounting screw kit	EDH-SIE-00480	1771
MSJ6	primary	SIE	JD/LD frame breaker mounting bolt kit	EDH-SIE-00487	1780
MSK2001	primary	SIE	SMM/SMD metering switchboard replacement meter socket kit, 1-phase	EDH-SIE-00707	1733
MSK2003	primary	SIE	SMM/SMD metering switchboard replacement meter socket kit, 3-phase	EDH-SIE-00708	1733
MSKG4	primary	SIE	NGG breaker mounting screw kit	EDH-SIE-00535	1754
MSKM4	primary	SIE	VL MG/NG/PG breaker mounting screw kit, 4-pole	EDH-SIE-00638	1826
MSQR3	primary	SIE	QR frame breaker mounting screw kit	EDH-SIE-00527	1758
MTX836	primary	SQD	Cable trough 36 in for NQ column-width panelboard	EDH-SQD-00707	872
MTX848	primary	SQD	Cable trough 48 in for NQ column-width panelboard	EDH-SQD-00708	873
MTX856	primary	SQD	Cable trough 56 in for NQ column-width panelboard	EDH-SQD-00709	873
MTX866	primary	SQD	Cable trough 66 in for NQ column-width panelboard	EDH-SQD-00710	873
N100MFI	primary	SQD	NF FI-frame main circuit breaker adapter kit (legacy)	EDH-SQD-00067	790
N150MH	primary	SQD	NF main circuit breaker adapter kit, H-frame, 150 A	EDH-SQD-00063	790
N22P23012B6	primary	GEA	GE Hex-head bolt 5/16-18 x 3/4 in (breaker terminal to strap contact block) - N2	EDH-GEA-00427	1345
N22P23016B6	primary	GEA	GE Hex-head bolt 3/8-16 x 1 in (breaker terminal to strap, G main kit) - N22P230	EDH-GEA-00426	1345
N245P21B6	primary	GEA	GE Nut 1/4-20 - N245P21B6	EDH-GEA-00428	1345
N250MJ	primary	SQD	NF main circuit breaker adapter kit, J-frame, 250 A	EDH-SQD-00064	791
N250MKC	primary	SQD	NF KI-frame main circuit breaker adapter kit (legacy)	EDH-SQD-00068	791
N32	primary	FPE	Lug kit for NN breaker	EDH-FPE-00038	1869
N37P21060B6	primary	GEA	GE Screw 1/4-20 x 3-3/4 in (breaker to bracket) - N37P21060B6	EDH-GEA-00429	1345
N37P21969B6	primary	GEA	GE Machine screw 1/4-20 x 3-3/4 in (breaker to bracket) - N37P21969B6	EDH-GEA-00430	1345
N400M	primary	SQD	NF main circuit breaker adapter kit, LA/LH, 400 A	EDH-SQD-00065	792
N402P11B6	primary	GEA	GE Flat washer 1/4 in - N402P11B6	EDH-GEA-00431	1346
N600MPPL	primary	SQD	NF main (400/600 A) or sub-feed (400 A) breaker kit, PowerPacT L	EDH-SQD-00066	792
N657P21024B6	primary	GEA	GE Carriage bolt 1/4-20 x 1-1/2 in (strap to vertical bus) - N657P21024B6	EDH-GEA-00432	1346
N722EP16006B6	primary	GEA	GE Thread-forming screw 10-32 x 3/8 in - N722EP16006B6	EDH-GEA-00439	1346
N730BP1308B6	primary	GEA	GE Thread-forming screw #6 x 1/2 in (terminal cover) - N730BP1308B6	EDH-GEA-00433	1346
NAIB-NEF	primary	FPE	FPE NE/NEF twin kit for NA1B panel	EDH-FPE-00014	1866
NB12K	alias	OTH	Aftermarket bus connection kit BCDPNBCH (seller cross-ref to EAT KCDPNB)	EDH-OTH-00035	84
NBK01A	primary	SIE	Revised P1 circuit numbering strip kit 1-60	EDH-SIE-00397	1704
NBK02A	primary	SIE	Revised P1 circuit numbering strip kit 61-120	EDH-SIE-00398	1704
NBK03A	primary	SIE	Revised P1 circuit numbering strip kit 121-240	EDH-SIE-00399	1705
NBK3	primary	SIE	P2/P3 snap-in number strips 1-42	EDH-SIE-00411	1506

Number	Type	Mfr	Description	Catalogue ID	Pg
NBK4	primary	SIE	P2/P3 snap-in number strips 43-84	EDH-SIE-00412	1506
NBK5	primary	SIE	P2/P3 snap-in number strips 85-126	EDH-SIE-00413	1506
NBK6	primary	SIE	P2/P3 snap-in number strips 127-168	EDH-SIE-00414	1506
NBK7	primary	SIE	P2/P3 snap-in number strips 169-210	EDH-SIE-00415	1507
NBK8	primary	SIE	P2/P3 snap-in number strips 211-252	EDH-SIE-00416	1507
NC26	primary	SQD	NC MONO-FLAT trim front for MH26 box (NQ/NF), F = flush, S = surface	EDH-SQD-00681	854
NC26F	alias	SQD	NC MONO-FLAT trim front for MH26 box (NQ/NF), F = flush, S = surface	EDH-SQD-00681	854
NC26FHR / NC26SHR	alias	SQD	NC MONO-FLAT trim front for MH26 box (NQ/NF), F = flush, S = surface	EDH-SQD-00681	854
NC26S	alias	SQD	NC MONO-FLAT trim front for MH26 box (NQ/NF), F = flush, S = surface	EDH-SQD-00681	854
NC32	primary	SQD	NC MONO-FLAT trim front for MH32 box (NQ/NF), F = flush, S = surface	EDH-SQD-00682	855
NC32F	alias	SQD	NC MONO-FLAT trim front for MH32 box (NQ/NF), F = flush, S = surface	EDH-SQD-00682	855
NC32FHR / NC32SHR	alias	SQD	NC MONO-FLAT trim front for MH32 box (NQ/NF), F = flush, S = surface	EDH-SQD-00682	855
NC32S	alias	SQD	NC MONO-FLAT trim front for MH32 box (NQ/NF), F = flush, S = surface	EDH-SQD-00682	855
NC38	primary	SQD	NC MONO-FLAT trim front for MH38 box (NQ/NF), F = flush, S = surface	EDH-SQD-00683	855
NC38F	alias	SQD	NC MONO-FLAT trim front for MH38 box (NQ/NF), F = flush, S = surface	EDH-SQD-00683	855
NC38FHR / NC38SHR	alias	SQD	NC MONO-FLAT trim front for MH38 box (NQ/NF), F = flush, S = surface	EDH-SQD-00683	855
NC38S	alias	SQD	NC MONO-FLAT trim front for MH38 box (NQ/NF), F = flush, S = surface	EDH-SQD-00683	855
NC44	primary	SQD	NC MONO-FLAT trim front for MH44 box (NQ/NF), F = flush, S = surface	EDH-SQD-00684	855
NC44F	alias	SQD	NC MONO-FLAT trim front for MH44 box (NQ/NF), F = flush, S = surface	EDH-SQD-00684	855
NC44FHR / NC44SHR	alias	SQD	NC MONO-FLAT trim front for MH44 box (NQ/NF), F = flush, S = surface	EDH-SQD-00684	855
NC44S	alias	SQD	NC MONO-FLAT trim front for MH44 box (NQ/NF), F = flush, S = surface	EDH-SQD-00684	855
NC50	primary	SQD	NC MONO-FLAT trim front for MH50 box (NQ/NF), F = flush, S = surface	EDH-SQD-00685	855
NC50F	alias	SQD	NC MONO-FLAT trim front for MH50 box (NQ/NF), F = flush, S = surface	EDH-SQD-00685	855
NC50FHR / NC50SHR	alias	SQD	NC MONO-FLAT trim front for MH50 box (NQ/NF), F = flush, S = surface	EDH-SQD-00685	855
NC50S	alias	SQD	NC MONO-FLAT trim front for MH50 box (NQ/NF), F = flush, S = surface	EDH-SQD-00685	855
NC50V	primary	SQD	NC vented-series trim front for MH50 box (400/600 A NQ, NF), F/S	EDH-SQD-00686	856
NC50V( )3P / NC50V( )3PHR	alias	SQD	NC vented-series trim front for MH50 box (400/600 A NQ, NF), F/S	EDH-SQD-00686	856
NC50VF / NC50VS	alias	SQD	NC vented-series trim front for MH50 box (400/600 A NQ, NF), F/S	EDH-SQD-00686	856
NC50V( )HR	alias	SQD	NC vented-series trim front for MH50 box (400/600 A NQ, NF), F/S	EDH-SQD-00686	856
NC56V	primary	SQD	NC vented-series trim front for MH56 box (400/600 A NQ, NF), F/S	EDH-SQD-00687	856
NC56V( )3P / NC56V( )3PHR	alias	SQD	NC vented-series trim front for MH56 box (400/600 A NQ, NF), F/S	EDH-SQD-00687	856
NC56VF / NC56VS	alias	SQD	NC vented-series trim front for MH56 box (400/600 A NQ, NF), F/S	EDH-SQD-00687	856

Number	Type	Mfr	Description	Catalogue ID	Pg
NC56V( )HR	alias	SQD	NC vented-series trim front for MH56 box (400/600 A NQ, NF), F/S	EDH-SQD-00687	856
NC59TS	primary	SQD	NF column-width (single-row) screw-cover front, 59 in box, surface	EDH-SQD-00699	811
NC62V	primary	SQD	NC vented-series trim front for MH62 box (400/600 A NQ, NF), F/S	EDH-SQD-00688	856
NC62V( )3P / NC62V( )3PHR	alias	SQD	NC vented-series trim front for MH62 box (400/600 A NQ, NF), F/S	EDH-SQD-00688	856
NC62VF3PNF	alias	SQD	NF three-point latch trim front, surface, 62 in (PowerPacT L/M/P)	EDH-SQD-00693	812
NC62VF3PNFHR	alias	SQD	NF three-point latch trim front, surface, 62 in (PowerPacT L/M/P)	EDH-SQD-00693	812
NC62VF / NC62VS	alias	SQD	NC vented-series trim front for MH62 box (400/600 A NQ, NF), F/S	EDH-SQD-00688	856
NC62V( )HR	alias	SQD	NC vented-series trim front for MH62 box (400/600 A NQ, NF), F/S	EDH-SQD-00688	856
NC62VS3PNF	primary	SQD	NF three-point latch trim front, surface, 62 in (PowerPacT L/M/P)	EDH-SQD-00693	812
NC62VS3PNFHR	alias	SQD	NF three-point latch trim front, surface, 62 in (PowerPacT L/M/P)	EDH-SQD-00693	812
NC65TS	primary	SQD	NF column-width (single-row) screw-cover front, 65 in box, surface	EDH-SQD-00700	812
NC68V	primary	SQD	NC vented-series trim front for MH68 box (400/600 A NQ, NF), F/S	EDH-SQD-00689	857
NC68V( )3P / NC68V( )3PHR	alias	SQD	NC vented-series trim front for MH68 box (400/600 A NQ, NF), F/S	EDH-SQD-00689	857
NC68VF3PNF	alias	SQD	NF three-point latch trim front, surface, 68 in (PowerPacT L/M/P)	EDH-SQD-00694	812
NC68VF3PNFHR	alias	SQD	NF three-point latch trim front, surface, 68 in (PowerPacT L/M/P)	EDH-SQD-00694	812
NC68VF / NC68VS	alias	SQD	NC vented-series trim front for MH68 box (400/600 A NQ, NF), F/S	EDH-SQD-00689	857
NC68V( )HR	alias	SQD	NC vented-series trim front for MH68 box (400/600 A NQ, NF), F/S	EDH-SQD-00689	857
NC68VS3PNF	primary	SQD	NF three-point latch trim front, surface, 68 in (PowerPacT L/M/P)	EDH-SQD-00694	812
NC68VS3PNFHR	alias	SQD	NF three-point latch trim front, surface, 68 in (PowerPacT L/M/P)	EDH-SQD-00694	812
NC71TS	primary	SQD	NF column-width (single-row) screw-cover front, 71 in box, surface	EDH-SQD-00701	812
NC74V	primary	SQD	NC vented-series trim front for MH74 box (400/600 A NQ, NF), F/S	EDH-SQD-00690	857
NC74V( )3P / NC74V( )3PHR	alias	SQD	NC vented-series trim front for MH74 box (400/600 A NQ, NF), F/S	EDH-SQD-00690	857
NC74VF3PNF	alias	SQD	NF three-point latch trim front, surface, 74 in (PowerPacT L/M/P)	EDH-SQD-00695	812
NC74VF3PNFHR	alias	SQD	NF three-point latch trim front, surface, 74 in (PowerPacT L/M/P)	EDH-SQD-00695	812
NC74VF / NC74VS	alias	SQD	NC vented-series trim front for MH74 box (400/600 A NQ, NF), F/S	EDH-SQD-00690	857
NC74V( )HR	alias	SQD	NC vented-series trim front for MH74 box (400/600 A NQ, NF), F/S	EDH-SQD-00690	857
NC74VS3PNF	primary	SQD	NF three-point latch trim front, surface, 74 in (PowerPacT L/M/P)	EDH-SQD-00695	812
NC74VS3PNFHR	alias	SQD	NF three-point latch trim front, surface, 74 in (PowerPacT L/M/P)	EDH-SQD-00695	812
NC80V	primary	SQD	NC vented-series trim front for MH80 box (400/600 A NQ, NF), F/S	EDH-SQD-00691	857
NC80V( )3P / NC80V( )3PHR	alias	SQD	NC vented-series trim front for MH80 box (400/600 A NQ, NF), F/S	EDH-SQD-00691	857

Number	Type	Mfr	Description	Catalogue ID	Pg
NC80VF3PNF	alias	SQD	NF three-point latch trim front, surface, 80 in (PowerPacT L/M/P)	EDH-SQD-00696	813
NC80VF3PNFHR	alias	SQD	NF three-point latch trim front, surface, 80 in (PowerPacT L/M/P)	EDH-SQD-00696	813
NC80VF / NC80VS	alias	SQD	NC vented-series trim front for MH80 box (400/600 A NQ, NF), F/S	EDH-SQD-00691	857
NC80V( )HR	alias	SQD	NC vented-series trim front for MH80 box (400/600 A NQ, NF), F/S	EDH-SQD-00691	857
NC80VS3PNF	primary	SQD	NF three-point latch trim front, surface, 80 in (PowerPacT L/M/P)	EDH-SQD-00696	813
NC80VS3PNFHR	alias	SQD	NF three-point latch trim front, surface, 80 in (PowerPacT L/M/P)	EDH-SQD-00696	813
NC85TS	primary	SQD	NF column-width (single-row) screw-cover front, 85 in box, surface	EDH-SQD-00702	813
NC86V	primary	SQD	NC vented-series trim front for MH86 box (400/600 A NQ, NF), F/S	EDH-SQD-00692	858
NC86V( )3P / NC86V( )3PHR	alias	SQD	NC vented-series trim front for MH86 box (400/600 A NQ, NF), F/S	EDH-SQD-00692	858
NC86VF3PNF	alias	SQD	NF three-point latch trim front, surface, 86 in (PowerPacT L/M/P)	EDH-SQD-00697	813
NC86VF3PNFHR	alias	SQD	NF three-point latch trim front, surface, 86 in (PowerPacT L/M/P)	EDH-SQD-00697	813
NC86VF / NC86VS	alias	SQD	NC vented-series trim front for MH86 box (400/600 A NQ, NF), F/S	EDH-SQD-00692	858
NC86V( )HR	alias	SQD	NC vented-series trim front for MH86 box (400/600 A NQ, NF), F/S	EDH-SQD-00692	858
NC86VS3PNF	primary	SQD	NF three-point latch trim front, surface, 86 in (PowerPacT L/M/P)	EDH-SQD-00697	813
NC86VS3PNFHR	alias	SQD	NF three-point latch trim front, surface, 86 in (PowerPacT L/M/P)	EDH-SQD-00697	813
NC92VF3PNF	alias	SQD	NF three-point latch trim front, surface, 92 in (PowerPacT L/M/P)	EDH-SQD-00698	813
NC92VF3PNFHR	alias	SQD	NF three-point latch trim front, surface, 92 in (PowerPacT L/M/P)	EDH-SQD-00698	813
NC92VS3PNF	primary	SQD	NF three-point latch trim front, surface, 92 in (PowerPacT L/M/P)	EDH-SQD-00698	813
NC92VS3PNFHR	alias	SQD	NF three-point latch trim front, surface, 92 in (PowerPacT L/M/P)	EDH-SQD-00698	813
NCFS	primary	FPE	FPE filler plate for thin NC breaker space	EDH-FPE-00042	1866
ND4K	alias	OTH	Aftermarket bus connection kit BPRLNDCH (seller cross-ref to EAT KPRL4ND)	EDH-OTH-00020	434
ND65K	alias	OTH	Aftermarket bus connection kit BMDITE (seller cross-ref to SIE SMND)	EDH-OTH-00060	1716
NDPNE	primary	FPE	FPE NDP twin mounting strap kit, NE/NEF	EDH-FPE-00013	1868
NDPNEJ	primary	FPE	FPE NDP twin mounting strap kit, NEJ/NEJH/HEJ	EDH-FPE-00012	1868
NDTS	primary	SIE	Siemens NDTS wire lug shield / end barrier, MD/ND	EDH-SIE-00289	1800
NEB64K	alias	OTH	Aftermarket bus connection kit BSEBP4 (seller cross-ref to SIE SEB)	EDH-OTH-00065	1523
NEB64K	primary	SIE	Twin mounting hardware kit for NEB/HEB breakers, 125 A (S4/P4/SPP/F1)	EDH-SIE-00433	1718
NEB65K	primary	SIE	Twin mounting hardware kit for NEB/HEB breakers, 125 A (Series 5/6 deep panels)	EDH-SIE-00432	1718
NEF1K	alias	OTH	Aftermarket bus connection kit BCDPNEF10FPE (seller cross-ref to FPE KCDP1C)	EDH-OTH-00002	1853
NEF1K (PCS aftermarket; Breaker King SKU BCDPNEF10FPE)	equivalent	FPE	FPE CDP twin bus-connection kit, NE/NEF frame	EDH-FPE-00001	1855
NEF3K	alias	OTH	Aftermarket bus connection kit BBDPNEF10FPE (seller cross-ref to FPE KBDP1C)	EDH-OTH-00006	1848

Number	Type	Mfr	Description	Catalogue ID	Pg
NEF3K (PCS aftermarket assembly; Breaker King SKU BBDPNEF10FPE)	equivalent	FPE	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	EDH-FPE-00007	1850
NEJ1K	alias	OTH	Aftermarket bus connection kit BCDPNEJFPE (seller cross-ref to FPE KCDP2C)	EDH-OTH-00003	1854
NEJ1K (PCS aftermarket; Breaker King SKU BCDPNEJFPE)	equivalent	FPE	FPE CDP twin bus-connection kit, NEJ/HEJ frame	EDH-FPE-00002	1856
NEJ3K	alias	OTH	Aftermarket bus connection kit BBDPNEJFPE (seller cross-ref to FPE KBDP2C)	EDH-OTH-00007	1849
NEJ3K (PCS aftermarket; Breaker King SKU BBDPNEJFPE)	equivalent	FPE	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	EDH-FPE-00008	1850
NEMATRX	primary	GEA	GE NEMA 3R/12 tamper-proof Torx screw kit	EDH-GEA-00689	1072
NF125FTL	primary	SQD	NF feed-through lug kit, 125 A	EDH-SQD-00078	802
NF125SFL	primary	SQD	NF sub-feed lug kit, 125 A	EDH-SQD-00075	801
NF12RDE	primary	SQD	NF 12 in. rail and deadfront extension kit	EDH-SQD-00107	808
NF18RDE	primary	SQD	NF 18 in. rail and deadfront extension kit	EDH-SQD-00108	808
NF250FTL	primary	SQD	NF feed-through lug kit, 250 A	EDH-SQD-00079	802
NF250SFBH	primary	SQD	NF sub-feed circuit breaker kit, H-frame, 250 A mains	EDH-SQD-00081	793
NF250SFBJ	primary	SQD	NF sub-feed circuit breaker kit, J-frame, 250 A mains	EDH-SQD-00082	793
NF250SFL	primary	SQD	NF sub-feed lug kit, 250 A	EDH-SQD-00076	801
NF400FTL	primary	SQD	NF feed-through lug kit, 400 A	EDH-SQD-00080	803
NF400SFL	primary	SQD	NF sub-feed lug kit, 400 A	EDH-SQD-00077	801
NF600SFBH	primary	SQD	NF single/dual sub-feed circuit breaker kit, H-frame, 400 A mains	EDH-SQD-00083	793
NF600SFBJ	primary	SQD	NF single/dual sub-feed circuit breaker kit, J-frame, 400 A mains	EDH-SQD-00084	794
NF600SFBPPL	primary	SQD	NF sub-feed circuit breaker kit, PowerPacT L, 600 A	EDH-SQD-00085	794
NF6RDE	primary	SQD	NF 6 in. rail and deadfront extension kit	EDH-SQD-00106	808
NFALV1	primary	SQD	NF optional main lug kit, aluminum compression (crimp), 125 A	EDH-SQD-00092	795
NFALV2	primary	SQD	NF optional main lug kit, aluminum compression (crimp), 250 A	EDH-SQD-00095	795
NFALV4	primary	SQD	NF optional main lug kit, aluminum compression (crimp), 400 A	EDH-SQD-00098	796
NFALV6	primary	SQD	NF optional main lug kit, aluminum compression (crimp), 600 A	EDH-SQD-00101	796
NFBFMB20	primary	SQD	NF back-fed main circuit breaker barrier kit	EDH-SQD-00074	809
NFCRBOND8	primary	SQD	NF 800 A U.S. condo riser neutral bonding strap kit	EDH-SQD-00115	815
NFCUM1	primary	SQD	NF optional main lug kit, copper mechanical, 125 A	EDH-SQD-00093	797
NFCUM2	primary	SQD	NF optional main lug kit, copper mechanical, 250 A	EDH-SQD-00096	797
NFCUM4	primary	SQD	NF optional main lug kit, copper mechanical, 400 A	EDH-SQD-00099	798
NFCUM6	primary	SQD	NF optional main lug kit, copper mechanical, 600 A	EDH-SQD-00102	798
NFCUV1	primary	SQD	NF optional main lug kit, copper compression (crimp), 125 A	EDH-SQD-00094	799
NFCUV2	primary	SQD	NF optional main lug kit, copper compression (crimp), 250 A	EDH-SQD-00097	799
NFCUV4	primary	SQD	NF optional main lug kit, copper compression (crimp), 400 A	EDH-SQD-00100	800
NFCUV6	primary	SQD	NF optional main lug kit, copper compression (crimp), 600 A	EDH-SQD-00103	800
NFEDBS	primary	SQD	NF U.S. service entrance barrier kit (E-frame main)	EDH-SQD-00069	809
NFES18	primary	SQD	NF equipment space kit (18 in.)	EDH-SQD-00110	807
NFFP15	primary	SQD	NF filler plates (15 per package)	EDH-SQD-00109	811
NFHARDWARE	primary	FPE	NF frame custom panel hardware (dealer item)	EDH-FPE-00043	1858
NFHJLLC	primary	SQD	NF U.S. service entrance barrier kit (H/J main)	EDH-SQD-00070	809
NFJ1K	alias	OTH	Aftermarket bus connection kit BCDPNFJFPE (seller cross-ref to FPE KCDP3C)	EDH-OTH-00004	1854
NFJ1K (PCS aftermarket; Breaker King SKU BCDPNFJFPE)	equivalent	FPE	FPE CDP twin bus-connection kit, NFJ/HFJ frame	EDH-FPE-00003	1856

Number	Type	Mfr	Description	Catalogue ID	Pg
NFJ3K (PCS aftermarket, 225 A max) - probable equivalent by numbering pattern	equivalent	FPE	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	EDH-FPE-00009	1851
NFLALLC	primary	SQD	NF U.S. service entrance barrier kit (LA/LH main)	EDH-SQD-00071	809
NFN1CU	primary	SQD	NF copper 100% neutral kit, 125 A	EDH-SQD-00089	805
NFN2CU	primary	SQD	NF copper 100% neutral kit, 250 A	EDH-SQD-00090	806
NFN6CR	primary	SQD	NF/NQ condo riser 100% neutral assembly, 400/600 A, 72 circuits	EDH-SQD-00116	806
NFN6CU	primary	SQD	NF copper 100% neutral kit, 400/600 A	EDH-SQD-00091	806
NFNL1	primary	SQD	NF 200% neutral kit, 125 A	EDH-SQD-00086	806
NFNL2	primary	SQD	NF 200% neutral kit, 250 A	EDH-SQD-00087	807
NFNL4	primary	SQD	NF 200% neutral kit, 400 A	EDH-SQD-00088	807
NFNL6CR	equivalent	SQD	NF/NQ condo riser 100% neutral assembly, 400/600 A, 72 circuits	EDH-SQD-00116	806
NFNQCRBOND46	primary	SQD	NQ/NF U.S. condo riser neutral bonding strap kit (400/600 A)	EDH-SQD-00114	815
NFPPLLLC	primary	SQD	NF U.S. service entrance barrier kit (PowerPacT L main)	EDH-SQD-00072	810
NFPPPLLC	primary	SQD	NF U.S. service entrance barrier kit (PowerPacT P main)	EDH-SQD-00073	810
NFRPLMB63RPPL	equivalent	SQD	NF PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A	EDH-SQD-00112	810
NFRPLMB6PPL	primary	SQD	NF PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A	EDH-SQD-00112	810
NFRPLMB8PPMP	primary	SQD	NF 800 A PowerPacT M/P main breaker deadfront replacement kit	EDH-SQD-00113	811
NG1D	primary	SIE	NG1D connecting strap kit - VL NG (10.00in, single)	EDH-SIE-00179	1576
NHB150PK	primary	GEA	NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole	EDH-GEA-00280	1151
NHB150PK	equivalent	OTH	Aftermarket bus connection kit BNHB150GE (seller cross-ref to GEA NHB150PK)	EDH-OTH-00036	1150
NJL1K	alias	OTH	Aftermarket bus connection kit BCDPNJLFPE (seller cross-ref to FPE KCDP4C)	EDH-OTH-00005	1855
NJL1K (PCS aftermarket; Breaker King SKU BCDPNJLFPE)	equivalent	FPE	FPE CDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00004	1857
NJL3K	alias	OTH	Aftermarket bus connection kit BBDPNJLFPE (seller cross-ref to FPE KBDP4C)	EDH-OTH-00008	1849
NJL3K (PCS aftermarket; Breaker King SKU BBDPNJLFPE)	equivalent	FPE	FPE BDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00010	1851
NKA	primary	GEA	A-Series 200% neutral kit NKA (225 A)	EDH-GEA-00074	1067
NKA42	primary	GEA	A-Series 200% neutral kit NKA42 (400 A)	EDH-GEA-00075	1067
NKA4FT	primary	GEA	A-Series 200% neutral kit NKA4FT (400 A)	EDH-GEA-00080	1067
NKR	primary	GEA	A-Series 200% neutral kit NKR (225 A)	EDH-GEA-00076	1067
NKR4	primary	GEA	A-Series 200% neutral kit NKR4 (400 A)	EDH-GEA-00077	1067
NKT	primary	GEA	A-Series 200% neutral kit NKT (225 A)	EDH-GEA-00078	1068
NKT4	primary	GEA	A-Series 200% neutral kit NKT4 (400 A)	EDH-GEA-00079	1068
NL300	primary	EAT	Type BR loadcenter add-on neutral/ground lug (NL300)	EDH-EAT-00457	27
NLAB100PK	primary	GEA	GE NLAB panelboard twin kit NLAB100PK (two 3-pole THQB) - per seller listing	EDH-GEA-00611	1153
NLAB-TQC3	primary	GEA	GE NLAB 3-pole TQC hardware kit	EDH-GEA-00590	1153
NM34	primary	FPE	Lug for FPE type NM breaker, (1) #1/0-600 kcmil, 125-300 A	EDH-FPE-00035	1869
NM36	primary	FPE	Lug for FPE type NM breaker, (2) 3/0-600 kcmil, 350-600 A	EDH-FPE-00036	1869
NM38	primary	FPE	Lug for FPE type NM breaker, (3) 250-500 kcmil, 700-800 A	EDH-FPE-00037	1869
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	Vintage PRL1/PRL2 400/600 A neutral bar	EDH-EAT-00240	174

Number	Type	Mfr	Description	Catalogue ID	Pg
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00438	173
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00439	173
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00440	173
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00441	173
NQ100AN	primary	SQD	NQ Add-on neutral/ground lug	EDH-SQD-00058	837
NQ12RDE	primary	SQD	NQ 12 in. trim/rail and deadfront extension kit	EDH-SQD-00051	846
NQ18RDE	primary	SQD	NQ 18 in. trim/rail and deadfront extension kit	EDH-SQD-00052	847
NQ200AN	primary	SQD	NQ Add-on neutral terminal kit for 175-200 A QO(VH) breakers	EDH-SQD-00060	837
NQ24RDE	primary	SQD	NQ 24 in. trim/rail and deadfront extension kit	EDH-SQD-00053	847
NQ30L1C14GS	primary	SQD	Square D NQ 14 in wide interior NQ30L1C14GS	EDH-SQD-00922	845
NQ3RDE	primary	SQD	NQ 3 in. trim/rail and deadfront extension kit	EDH-SQD-00049	847
NQ418L1C14	primary	SQD	Square D NQ 14 in wide interior NQ418L1C14	EDH-SQD-00918	845
NQ430L1C14	primary	SQD	Square D NQ 14 in wide interior NQ430L1C14	EDH-SQD-00919	845
NQ430L2C14	primary	SQD	Square D NQ 14 in wide interior NQ430L2C14	EDH-SQD-00920	845
NQ442L2C14	primary	SQD	Square D NQ 14 in wide interior NQ442L2C14	EDH-SQD-00921	846
NQ6RDE	primary	SQD	NQ 6 in. trim/rail and deadfront extension kit	EDH-SQD-00050	847
NQALMA6	primary	SQD	NQ 600 A aluminum mechanical main lug kit	EDH-SQD-00041	826
NQALMN6	primary	SQD	NQ 600 A neutral lug kit (aluminum mechanical)	EDH-SQD-00028	836
NQALV1	primary	SQD	NQ optional main lug kit, aluminum compression (crimp), 100 A	EDH-SQD-00029	826
NQALV2	primary	SQD	NQ optional main lug kit, aluminum compression (crimp), 225 A	EDH-SQD-00032	827
NQALV4	primary	SQD	NQ optional main lug kit, aluminum compression (crimp), 400 A	EDH-SQD-00035	827
NQALV6	primary	SQD	NQ optional main lug kit, aluminum compression (crimp), 600 A	EDH-SQD-00038	828
NQB520	primary	SQD	14 in wide panelboard box, 14 in W x 5.75 in D x 20 in H (NQ14 / NQOD 14 in)	EDH-SQD-00735	921
NQB523	primary	SQD	14 in wide panelboard box, 14 in W x 5.75 in D x 23 in H (NQ14 / NQOD 14 in)	EDH-SQD-00736	921
NQB526	primary	SQD	14 in wide panelboard box, 14 in W x 5.75 in D x 26 in H (NQ14 / NQOD 14 in)	EDH-SQD-00737	921
NQB529	primary	SQD	14 in wide panelboard box, 14 in W x 5.75 in D x 29 in H (NQ14 / NQOD 14 in)	EDH-SQD-00738	921
NQB532	primary	SQD	14 in wide panelboard box, 14 in W x 5.75 in D x 32 in H (NQ14 / NQOD 14 in)	EDH-SQD-00739	873
NQB535	primary	SQD	14 in wide panelboard box, 14 in W x 5.75 in D x 35 in H (NQ14 / NQOD 14 in)	EDH-SQD-00740	921
NQB538	primary	SQD	14 in wide panelboard box, 14 in W x 5.75 in D x 38 in H (NQ14 / NQOD 14 in)	EDH-SQD-00741	873
NQB541	primary	SQD	14 in wide panelboard box, 14 in W x 5.75 in D x 41 in H (NQ14 / NQOD 14 in)	EDH-SQD-00742	922
NQB544	primary	SQD	14 in wide panelboard box, 14 in W x 5.75 in D x 44 in H (NQ14 / NQOD 14 in)	EDH-SQD-00743	873
NQB550	primary	SQD	14 in wide panelboard box, 14 in W x 5.75 in D x 50 in H (NQ14 / NQOD 14 in)	EDH-SQD-00744	874
NQB556	primary	SQD	14 in wide panelboard box, 14 in W x 5.75 in D x 56 in H (NQ14 / NQOD 14 in)	EDH-SQD-00745	922

Number	Type	Mfr	Description	Catalogue ID	Pg
NQC20	primary	SQD	MONO-FLAT front for 14 in wide NQB520 box (F/S)	EDH-SQD-00746	913
NQC20F / NQC20S	alias	SQD	MONO-FLAT front for 14 in wide NQB520 box (F/S)	EDH-SQD-00746	913
NQC-20TF	primary	SQD	Legacy 1970 NQO MONO-FLAT front NQC-20TF / NQC-20TS (14 in W x 4 in D x 20-1/4 i	EDH-SQD-00802	896
NQC-20TS	alias	SQD	Legacy 1970 NQO MONO-FLAT front NQC-20TF / NQC-20TS (14 in W x 4 in D x 20-1/4 i	EDH-SQD-00802	896
NQC23	primary	SQD	MONO-FLAT front for 14 in wide NQB523 box (F/S)	EDH-SQD-00747	913
NQC23F / NQC23S	alias	SQD	MONO-FLAT front for 14 in wide NQB523 box (F/S)	EDH-SQD-00747	913
NQC-24TF	primary	SQD	Legacy 1970 NQO MONO-FLAT front NQC-24TF / NQC-24TS (14 in W x 4 in D x 24-1/4 i	EDH-SQD-00803	896
NQC-24TS	alias	SQD	Legacy 1970 NQO MONO-FLAT front NQC-24TF / NQC-24TS (14 in W x 4 in D x 24-1/4 i	EDH-SQD-00803	896
NQC26	primary	SQD	MONO-FLAT front for 14 in wide NQB526 box (F/S)	EDH-SQD-00748	913
NQC26F / NQC26S	alias	SQD	MONO-FLAT front for 14 in wide NQB526 box (F/S)	EDH-SQD-00748	913
NQC-28TF	primary	SQD	Legacy 1970 NQO MONO-FLAT front NQC-28TF / NQC-28TS (14 in W x 4 in D x 28 in H)	EDH-SQD-00804	897
NQC-28TS	alias	SQD	Legacy 1970 NQO MONO-FLAT front NQC-28TF / NQC-28TS (14 in W x 4 in D x 28 in H)	EDH-SQD-00804	897
NQC29	primary	SQD	MONO-FLAT front for 14 in wide NQB529 box (F/S)	EDH-SQD-00749	913
NQC29F / NQC29S	alias	SQD	MONO-FLAT front for 14 in wide NQB529 box (F/S)	EDH-SQD-00749	913
NQC32	primary	SQD	MONO-FLAT front for 14 in wide NQB532 box (F/S)	EDH-SQD-00750	858
NQC32F / NQC32S	alias	SQD	MONO-FLAT front for 14 in wide NQB532 box (F/S)	EDH-SQD-00750	858
NQC-32TF	primary	SQD	Legacy 1970 NQO MONO-FLAT front NQC-32TF / NQC-32TS (14 in W x 4 in D x 32-1/2 i	EDH-SQD-00805	897
NQC-32TS	alias	SQD	Legacy 1970 NQO MONO-FLAT front NQC-32TF / NQC-32TS (14 in W x 4 in D x 32-1/2 i	EDH-SQD-00805	897
NQC35	primary	SQD	MONO-FLAT front for 14 in wide NQB535 box (F/S)	EDH-SQD-00751	913
NQC35F / NQC35S	alias	SQD	MONO-FLAT front for 14 in wide NQB535 box (F/S)	EDH-SQD-00751	913
NQC-37TF	primary	SQD	Legacy 1970 NQO MONO-FLAT front NQC-37TF / NQC-37TS (14 in W x 4 in D x 37-3/4 i	EDH-SQD-00806	897
NQC-37TS	alias	SQD	Legacy 1970 NQO MONO-FLAT front NQC-37TF / NQC-37TS (14 in W x 4 in D x 37-3/4 i	EDH-SQD-00806	897
NQC38	primary	SQD	MONO-FLAT front for 14 in wide NQB538 box (F/S)	EDH-SQD-00752	858
NQC38F / NQC38S	alias	SQD	MONO-FLAT front for 14 in wide NQB538 box (F/S)	EDH-SQD-00752	858
NQC41	primary	SQD	MONO-FLAT front for 14 in wide NQB541 box (F/S)	EDH-SQD-00753	914
NQC41F / NQC41S	alias	SQD	MONO-FLAT front for 14 in wide NQB541 box (F/S)	EDH-SQD-00753	914
NQC-42TF	primary	SQD	Legacy 1970 NQO MONO-FLAT front NQC-42TF / NQC-42TS (14 in W x 5-3/4 in D x 42-1	EDH-SQD-00807	898
NQC-42TS	alias	SQD	Legacy 1970 NQO MONO-FLAT front NQC-42TF / NQC-42TS (14 in W x 5-3/4 in D x 42-1	EDH-SQD-00807	898
NQC44	primary	SQD	MONO-FLAT front for 14 in wide NQB544 box (F/S)	EDH-SQD-00754	858
NQC44F / NQC44S	alias	SQD	MONO-FLAT front for 14 in wide NQB544 box (F/S)	EDH-SQD-00754	858
NQC-48TF	primary	SQD	Legacy 1970 NQO MONO-FLAT front NQC-48TF / NQC-48TS (14 in W x 5-3/4 in D x 48-3	EDH-SQD-00808	898
NQC-48TS	alias	SQD	Legacy 1970 NQO MONO-FLAT front NQC-48TF / NQC-48TS (14 in W x 5-3/4 in D x 48-3	EDH-SQD-00808	898
NQC50	primary	SQD	MONO-FLAT front for 14 in wide NQB550 box (F/S)	EDH-SQD-00755	859
NQC50F / NQC50S	alias	SQD	MONO-FLAT front for 14 in wide NQB550 box (F/S)	EDH-SQD-00755	859
NQC56	primary	SQD	MONO-FLAT front for 14 in wide NQB556 box (F/S)	EDH-SQD-00756	914
NQC56F / NQC56S	alias	SQD	MONO-FLAT front for 14 in wide NQB556 box (F/S)	EDH-SQD-00756	914
NQCUM1	primary	SQD	NQ optional main lug kit, copper mechanical, 100 A	EDH-SQD-00030	828
NQCUM2	primary	SQD	NQ optional main lug kit, copper mechanical, 225 A	EDH-SQD-00033	829
NQCUM4	primary	SQD	NQ optional main lug kit, copper mechanical, 400 A	EDH-SQD-00036	829
NQCUM6	primary	SQD	NQ optional main lug kit, copper mechanical, 600 A	EDH-SQD-00039	830
NQCUMN6	equivalent	SQD	NQ 600 A neutral lug kit (aluminum mechanical)	EDH-SQD-00028	836
NQCUV1	primary	SQD	NQ optional main lug kit, copper compression (crimp), 100 A	EDH-SQD-00031	830

Number	Type	Mfr	Description	Catalogue ID	Pg
NQCUV2	primary	SQD	NQ optional main lug kit, copper compression (crimp), 225 A	EDH-SQD-00034	831
NQCUV4	primary	SQD	NQ optional main lug kit, copper compression (crimp), 400 A	EDH-SQD-00037	831
NQCUV6	primary	SQD	NQ optional main lug kit, copper compression (crimp), 600 A	EDH-SQD-00040	832
NQES18	primary	SQD	NQ equipment space kit (18 in.)	EDH-SQD-00055	846
NQFP15	primary	SQD	NQ filler plates (15 per package)	EDH-SQD-00054	852
NQFTL2H	primary	SQD	NQ feed-through lug kit, 225 A, high circuit count (54/72/84)	EDH-SQD-00012	834
NQFTL2L	primary	SQD	NQ feed-through lug kit, 225 A, low circuit count (30/42)	EDH-SQD-00011	835
NQFTL4H	primary	SQD	NQ feed-through lug kit, 400 A, high circuit count	EDH-SQD-00014	835
NQFTL4L	primary	SQD	NQ feed-through lug kit, 400 A, low circuit count	EDH-SQD-00013	836
NQHJLSC	primary	SQD	NQ fingersafe IP2X main breaker load-side cover (H-, J-frame main circuit breake	EDH-SQD-00581	848
NQHJQLLC	primary	SQD	NQ U.S. service entrance barrier kit (H/J/Q main)	EDH-SQD-00046	849
NQLALHLSC	primary	SQD	NQ fingersafe IP2X main breaker load-side cover (LA/LH frame main circuit breake	EDH-SQD-00583	849
NQLALLC	primary	SQD	NQ U.S. service entrance barrier kit (LA/LH main)	EDH-SQD-00045	850
NQMB2HJ	primary	SQD	NQ main circuit breaker adapter kit, H/J-frame, 225 A	EDH-SQD-00003	820
NQMB2HJ14	equivalent	SQD	NQ main circuit breaker adapter kit, H/J-frame, 225 A	EDH-SQD-00003	820
NQMB2HJ14	primary	SQD	NQ14 main circuit breaker adapter kit, H/J-frame (14-inch-wide interiors)	EDH-SQD-00004	821
NQMB2KI	primary	SQD	NQ main circuit breaker adapter kit, KI-frame, 225 A (legacy)	EDH-SQD-00005	821
NQMB2Q	primary	SQD	NQ main circuit breaker adapter kit, Q-frame, 225 A	EDH-SQD-00001	821
NQMB2Q14	equivalent	SQD	NQ main circuit breaker adapter kit, Q-frame, 225 A	EDH-SQD-00001	821
NQMB2Q14	primary	SQD	NQ14 main circuit breaker adapter kit, Q-frame, 225 A (14-inch-wide interiors)	EDH-SQD-00002	822
NQMB4LA	primary	SQD	NQ main circuit breaker adapter kit, LA/LH, 400 A	EDH-SQD-00006	822
NQMB6PPL	primary	SQD	NQ main / sub-feed circuit breaker kit, PowerPacT L-frame, 400/600 A	EDH-SQD-00007	823
NQMLLSC	primary	SQD	NQ fingersafe IP2X main lugs cover (Main lugs)	EDH-SQD-00584	850
NQN1CU	primary	SQD	NQ copper 100% neutral kit, 100 A	EDH-SQD-00024	839
NQN2CU	primary	SQD	NQ copper 100% neutral kit, 225 A	EDH-SQD-00025	839
NQN6CR / NQNL6CR	alias	SQD	NQ condo riser 100% neutral assembly, 400/600 A	EDH-SQD-00027	839
NQN6CRUS	primary	SQD	NQ condo riser 100% neutral assembly, 400/600 A	EDH-SQD-00027	839
NQN6CU	primary	SQD	NQ copper 100% neutral kit, 400 A	EDH-SQD-00026	840
NQNCC	primary	SQD	NQ fingersafe IP2X neutral cover	EDH-SQD-00585	850
NQNL1	primary	SQD	NQ 200% neutral kit, 100 A	EDH-SQD-00020	840
NQNL2	primary	SQD	NQ 200% neutral kit, 225 A	EDH-SQD-00021	841
NQNL2ACCY	primary	SQD	NQ 200% neutral kit, 225 A, for panels with SFL/FTL/SFB	EDH-SQD-00022	841
NQNL4	primary	SQD	NQ 200% neutral kit, 400 A	EDH-SQD-00023	842
NQNL6CRUS	equivalent	SQD	NQ condo riser 100% neutral assembly, 400/600 A	EDH-SQD-00027	839
NQOD100SFL	primary	SQD	NQOD sub-feed lug kit, 100 A, main lugs only, 1 or 3 phase	EDH-SQD-00915	906
NQOD225SFL	primary	SQD	NQOD sub-feed lug kit, 225 A, main lugs only, 1 or 3 phase	EDH-SQD-00916	906
NQOD4	primary	SQD	NQOD main circuit breaker adapter kit, 400 A, LA/LH (Q4)	EDH-SQD-00914	904
NQODBFMB20	primary	SQD	NQ/NQOD back-fed main circuit breaker barrier kit	EDH-SQD-00048	851
NQODJK	primary	SQD	NQOD main circuit breaker adapter kit, 225 A, J/KI-frame	EDH-SQD-00913	905
NQODQ2	supersedes	SQD	NQOD main circuit breaker adapter kit, 225 A, PowerPacT Q-frame	EDH-SQD-00911	905
NQODQ2	primary	SQD	NQOD main circuit breaker adapter kit, Q2-frame (Q2L)	EDH-SQD-00912	905
NQODQB	primary	SQD	NQOD main circuit breaker adapter kit, 225 A, PowerPacT Q-frame	EDH-SQD-00911	905
NQPPLLLC	primary	SQD	NQ U.S. service entrance barrier kit (PowerPacT L main)	EDH-SQD-00047	851
NQQLSC	primary	SQD	NQ fingersafe IP2X main breaker load-side cover (Q-frame main circuit breaker)	EDH-SQD-00582	851
NQRPLMB2HJ	primary	SQD	NQ main breaker deadfront replacement for NQMB2HJ kit (search summary)	EDH-SQD-00917	852

Number	Type	Mfr	Description	Catalogue ID	Pg
NQRPLMB63RPPL	equivalent	SQD	NQ PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A	EDH-SQD-00062	852
NQRPLMB6PPL	primary	SQD	NQ PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A	EDH-SQD-00062	852
NQSFB2HJ	primary	SQD	NQ sub-feed circuit breaker adapter kit, H/J-frame, 225 A mains	EDH-SQD-00016	823
NQSFB2Q	primary	SQD	NQ sub-feed circuit breaker adapter kit, Q-frame, 225 A mains	EDH-SQD-00015	824
NQSFB4HJ	primary	SQD	NQ sub-feed circuit breaker adapter kit, H/J-frame, 400 A mains (single or dual)	EDH-SQD-00018	824
NQSFB4Q	primary	SQD	NQ sub-feed circuit breaker adapter kit, Q-frame, 400 A mains (single or dual)	EDH-SQD-00017	825
NQSFB6PPL	primary	SQD	NQ sub-feed circuit breaker kit, PowerPacT L, 600 A mains	EDH-SQD-00019	825
NQSFL1	primary	SQD	NQ sub-feed lug kit, 100 A	EDH-SQD-00008	832
NQSFL2	primary	SQD	NQ sub-feed lug kit, 225 A	EDH-SQD-00009	833
NQSFL4	primary	SQD	NQ sub-feed lug kit, 400 A	EDH-SQD-00010	833
NQSFL4L	equivalent	SQD	NQ sub-feed lug kit, 400 A	EDH-SQD-00010	833
NTS3K	primary	EAT	Series C N-frame terminal shield	EDH-EAT-00644	652
NTX836	primary	SQD	Cable trough 36 in for NF column-width panelboard	EDH-SQD-00711	814
NTX848	primary	SQD	Cable trough 48 in for NF column-width panelboard	EDH-SQD-00712	814
NTX856	primary	SQD	Cable trough 56 in for NF column-width panelboard	EDH-SQD-00713	814
NTX866	primary	SQD	Cable trough 66 in for NF column-width panelboard	EDH-SQD-00714	814
P1CONACPHAL	primary	SIE	RP1 A/C-phase replacement aluminum branch connectors, kit of 6	EDH-SIE-00097	1635
P1CONACPHCU	primary	SIE	RP1 A/C-phase replacement copper branch connectors	EDH-SIE-00088	1635
P1CONBPHAL	primary	SIE	RP1 B-phase replacement aluminum branch connectors	EDH-SIE-00089	1636
P1CONBPHCU	primary	SIE	RP1 B-phase replacement copper branch connectors	EDH-SIE-00090	1636
P1DFS250AFT	primary	SIE	P1 250A deadfront support	EDH-SIE-00092	1665
P1DFS250ANFT	primary	SIE	P1 250A deadfront support	EDH-SIE-00093	1665
P1DFS400A	primary	SIE	P1 400A deadfront support (new for 3VA)	EDH-SIE-00094	1665
P1SCRWS	primary	SIE	P1 branch breaker mounting screws	EDH-SIE-00091	1687
P2BK1	primary	SIE	P2 250A max horizontal main breaker bonding strap kit	EDH-SIE-00120	1504
P2BK2	primary	SIE	P2 125A max main lug bonding strap assembly	EDH-SIE-00121	1504
P2BK3	primary	SIE	P2 250-600A MLO and all vertical MB bonding kit	EDH-SIE-00122	1505
P2QRFP01	primary	SIE	P2 QR deadfront filler	EDH-SIE-00082	1503
P3BK1	primary	SIE	P3 bonding kit 800A max MLO+MB	EDH-SIE-00123	1515
P41X25	primary	EAT	PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)	EDH-EAT-00296	480
P53RCONVKIT	primary	SIE	P5 power panel Type 1 to Type 3R/12 enclosure interior conversion kit	EDH-SIE-00363	1601
PC2637	primary	SIE	E/ED/CLE frame plug-in mounting assembly, 2-pole, line end	EDH-SIE-00472	1763
PC2638	primary	SIE	E/ED/CLE frame plug-in mounting assembly, 2-pole, load end	EDH-SIE-00473	1763
PC2657	primary	SIE	E/ED/CLE frame plug-in mounting assembly, 3-pole, line end	EDH-SIE-00474	1763
PC2658	primary	SIE	E/ED/CLE frame plug-in mounting assembly, 3-pole, load end	EDH-SIE-00475	1763
PC4753	primary	SIE	F/FD frame plug-in mounting assembly, 2-pole	EDH-SIE-00481	1770
PC4754	primary	SIE	F/FD frame plug-in mounting assembly, 3-pole	EDH-SIE-00482	1770
PC5660	primary	SIE	LD frame plug-in mounting assembly, 2-pole	EDH-SIE-00491	1782
PC5661	primary	SIE	LD frame plug-in mounting assembly, 3-pole	EDH-SIE-00492	1782
PC5662	primary	SIE	MD frame plug-in adaptor, 2-pole	EDH-SIE-00513	1797
PC5663	primary	SIE	MD frame plug-in adaptor, 3-pole	EDH-SIE-00514	1797
PC5664	primary	SIE	MD/ND frame plug-in adaptor, 2-pole, line (bus)	EDH-SIE-00508	1797
PC5665	primary	SIE	MD/ND frame plug-in adaptor, 2-pole, load	EDH-SIE-00509	1797
PC5666	primary	SIE	MD/ND frame plug-in adaptor, 3-pole, line (bus)	EDH-SIE-00510	1798
PC5667	primary	SIE	MD/ND frame plug-in adaptor, 3-pole, load	EDH-SIE-00511	1798
PC5777	primary	SIE	JD frame plug-in mounting assembly, 2-pole	EDH-SIE-00489	1778

Number	Type	Mfr	Description	Catalogue ID	Pg
PC5778	primary	SIE	JD frame plug-in mounting assembly, 3-pole	EDH-SIE-00490	1778
PCBDFC3	primary	SIE	VL DG plug-in base, front connection, 3-pole	EDH-SIE-00641	1818
PCBDFC4	primary	SIE	VL DG plug-in base, front connection, 4-pole	EDH-SIE-00642	1818
PCBDRC3	primary	SIE	VL DG plug-in base, rear connection, 3-pole	EDH-SIE-00639	1818
PCBDRC4	primary	SIE	VL DG plug-in base, rear connection, 4-pole	EDH-SIE-00640	1819
PCBFFC3	primary	SIE	VL FG plug-in base, front connection, 3-pole	EDH-SIE-00645	1819
PCBFFC4	primary	SIE	VL FG plug-in base, front connection, 4-pole	EDH-SIE-00646	1819
PCBFRC3	primary	SIE	VL FG plug-in base, rear connection, 3-pole	EDH-SIE-00643	1819
PCBFRC4	primary	SIE	VL FG plug-in base, rear connection, 4-pole	EDH-SIE-00644	1819
PCBJRC3	primary	SIE	VL JG plug-in base, rear connection, 3-pole	EDH-SIE-00650	1820
PCBJRC4	primary	SIE	VL JG plug-in base, rear connection, 4-pole	EDH-SIE-00651	1820
PCBLFC4	primary	SIE	VL LG plug-in base, front connection, 4-pole	EDH-SIE-00652	1820
PCBMRC3	primary	SIE	VL MG plug-in base, rear connection, 3-pole	EDH-SIE-00654	1820
PCBNRC3	primary	SIE	VL NG plug-in base, rear connection, 3-pole	EDH-SIE-00658	1820
PCXD3	primary	SIE	VL DG plug-in contact (breaker side) kit, 3-pole	EDH-SIE-00647	1821
PCXD4	primary	SIE	VL DG plug-in contact kit, 4-pole	EDH-SIE-00648	1821
PCXFT	primary	SIE	VL FG plug-in accessory (PCXFT)	EDH-SIE-00649	1821
PCXLT	primary	SIE	VL JG/LG plug-in accessory (PCXLT)	EDH-SIE-00653	1821
PCXM3	primary	SIE	VL MG plug-in contact kit, 3-pole	EDH-SIE-00655	1821
PCXMH	primary	SIE	VL MG plug-in accessory (PCXMH)	EDH-SIE-00656	1822
PCXMT	primary	SIE	VL MG plug-in accessory (PCXMT)	EDH-SIE-00657	1822
PCXN3	primary	SIE	VL NG plug-in contact kit, 3-pole	EDH-SIE-00659	1822
PCXPT	primary	SIE	VL NG/PG plug-in accessory (PCXPT)	EDH-SIE-00660	1822
PDC12DG4	primary	SQD	PowerPact D-frame power distribution connector	EDH-SQD-00493	1021
PDC12DG4L3	primary	SQD	PowerPact L-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00394	1041
PDC12LA4	primary	SQD	Square D LA power distribution connector (multi-wire load lug)	EDH-SQD-00490	1012
PDC3FA2	primary	SQD	Square D FA power distribution connector (multi-wire load lug)	EDH-SQD-00488	1007
PDC3HD2	primary	SQD	PowerPact H-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00390	1023
PDC3JD20	primary	SQD	PowerPact J-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00392	1029
PDC4LA250	primary	SQD	Square D LA power distribution connector (multi-wire load lug)	EDH-SQD-00491	1012
PDC5DG20	primary	SQD	PowerPact D-frame power distribution connector	EDH-SQD-00492	1021
PDC5DG20L3	primary	SQD	PowerPact L-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00393	1041
PDC6FA6	primary	SQD	Square D FA power distribution connector (multi-wire load lug)	EDH-SQD-00487	1007
PDC6HD6	primary	SQD	PowerPact H-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00389	1023
PDC6JD4	primary	SQD	PowerPact J-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00391	1029
PDC6LA20	primary	SQD	Square D LA power distribution connector (multi-wire load lug)	EDH-SQD-00489	1012
PDSPD2403SA2A-K3	primary	EAT	Eaton integrated panelboard SPD PDSPD2403SA2A-K3	EDH-EAT-01230	372
PDSPD2403SA2A-K4	primary	EAT	Eaton integrated panelboard SPD PDSPD2403SA2A-K4	EDH-EAT-01231	490
PDSPD4803SA2A-K3	primary	EAT	Eaton integrated panelboard SPD PDSPD4803SA2A-K3	EDH-EAT-01228	372
PDSPD4803SA2A-K4	primary	EAT	Eaton integrated panelboard SPD PDSPD4803SA2A-K4	EDH-EAT-01229	490
PE4630	primary	SIE	Super Blue Pennant distribution panel kit 400/600 A (30 ED4)	EDH-SIE-00726	1743
PE4840	primary	SIE	Super Blue Pennant distribution panel kit 800 A (40 ED4)	EDH-SIE-00732	1743
PEGB42	primary	SIE	Super Blue Pennant equipment ground bus	EDH-SIE-00751	1742
PF4606	primary	SIE	Super Blue Pennant distribution panel kit 400/600 A (12 ED4 + 6 FXD6)	EDH-SIE-00727	1743
PF4809	primary	SIE	Super Blue Pennant distribution panel kit 800 A (12 ED4 + 9 FXD6)	EDH-SIE-00733	1744
PH2CC1	primary	EAT	Type PH branch breaker connector/mounting kit (single-phase panel, CC/CCH/CHH)	EDH-EAT-00940	157

Number	Type	Mfr	Description	Catalogue ID	Pg
PH3CC3	primary	EAT	Type PH branch breaker connector/mounting kit (three-phase panel, CC/CCH/CHH)	EDH-EAT-00942	158
PH6C3	primary	EAT	Cutler-Hammer PH panelboard twin breaker kit PH6C3 (CC frame) - per aftermarket	EDH-EAT-01238	159
PH6C3	equivalent	OTH	Aftermarket bus connection kit BPHCCH (seller cross-ref to EAT PH6C3)	EDH-OTH-00027	159
PH6CK	alias	OTH	Aftermarket bus connection kit BPHCCH (seller cross-ref to EAT PH6C3)	EDH-OTH-00027	159
PH6E-3	primary	EAT	Type PH branch breaker connector/mounting kit (three-phase panel, EHD and F-Fram	EDH-EAT-00941	158
PH6E3	equivalent	OTH	Aftermarket bus connection kit BPHECH (seller cross-ref to EAT PH6E3)	EDH-OTH-00026	159
PH6EK	alias	OTH	Aftermarket bus connection kit BPHECH (seller cross-ref to EAT PH6E3)	EDH-OTH-00026	159
PHB3	primary	EAT	Eaton padlockable handle lock (handle block), J, K-frame	EDH-EAT-01276	387
PHL1	primary	EAT	Eaton padlockable handle lock hasp, F-frame 1-pole breakers	EDH-EAT-01277	387
PJC-7201	primary	SQD	I-Line plug-on connector joint compound, 2 oz	EDH-SQD-00150	774
PJC7201	alias	SQD	I-Line plug-on connector joint compound, 2 oz	EDH-SQD-00150	774
PK103T	primary	FPE	FPE QMQB switch strap/link kit PK103T	EDH-FPE-00033	1865
PK12GTA	primary	SQD	Aluminum equipment ground bar kit (12 terminations, inferred from number)	EDH-SQD-00127	842
PK15GTA	primary	SQD	Equipment ground bar kit PK15GTA (24 circuit 225 A max)	EDH-SQD-00616	907
PK15GTAL	primary	SQD	Equipment ground bar kit PK15GTAL (PK15GTA with #1 to 4/0 Al/Cu lug)	EDH-SQD-00617	907
PK18GTA	primary	SQD	Aluminum equipment ground bar kit (18 terminations, inferred from number)	EDH-SQD-00128	843
PK18GTAL	primary	SQD	Equipment ground bar kit PK18GTAL (PK18GTA with #1 to 4/0 Al/Cu lug)	EDH-SQD-00618	907
PK1TC	primary	SQD	Square D trim clamp (NQOB), obsolete	EDH-SQD-00525	902
PK22FL	primary	SQD	Lock for MONO-FLAT fronts (NQOD) / telephone cabinet fronts up to 30 in (after N	EDH-SQD-00609	923
PK23GTA	primary	SQD	Aluminum equipment ground bar kit (23 terminations, inferred from number)	EDH-SQD-00129	843
PK-23GTA	alias	SQD	Aluminum equipment ground bar kit (23 terminations, inferred from number)	EDH-SQD-00129	843
PK23GTAL	primary	SQD	PK23GTA ground bar with #1-4/0 Al/Cu lug	EDH-SQD-00125	843
PK27GTA	primary	SQD	Aluminum equipment ground bar kit, 27 terminations #14-#4 AWG (also #6-2/0 lug v	EDH-SQD-00123	844
PK-27GTA	alias	SQD	Aluminum equipment ground bar kit, 27 terminations #14-#4 AWG (also #6-2/0 lug v	EDH-SQD-00123	844
PK27GTACU	primary	SQD	Copper equipment ground bar kit, 27 terminations #14-#4 Cu	EDH-SQD-00124	844
PK2MB	primary	SQD	Square D QO back-fed main breaker retaining kit PK2MB	EDH-SQD-00936	1001
PK32DGTA	primary	SQD	I-Line equipment ground bar kit for HCJ, HCP, HCP-SU (single row), HCR-U	EDH-SQD-00130	735
PK-32DGTA	alias	SQD	I-Line equipment ground bar kit for HCJ, HCP, HCP-SU (single row), HCR-U	EDH-SQD-00130	735
PK3MB	primary	SQD	Square D QO back-fed main breaker retaining kit PK3MB	EDH-SQD-00937	1001
PK-3SP	primary	SQD	Square D touch-up paint, blue-gray (aerosol)	EDH-SQD-00552	903
PK3TC	primary	SQD	Trim clamps and screws, NEHB fronts up through 400 A	EDH-SQD-00606	788
PK-49SP	primary	SQD	Square D touch-up paint, ANSI 49 gray (aerosol)	EDH-SQD-00553	903
PK-4FL	primary	SQD	Square D flush lock for MONO-FLAT trims	EDH-SQD-00555	889
PK4FL	supersedes	SQD	Lock for MONO-FLAT fronts (NQOD) / telephone cabinet fronts up to 30 in (after N	EDH-SQD-00609	923
PK4MB2HA	primary	SQD	Square D QO back-fed main breaker retaining kit PK4MB2HA	EDH-SQD-00940	1002
PK4MB2LA	primary	SQD	Square D QO back-fed main breaker retaining kit PK4MB2LA	EDH-SQD-00939	1002
PK4NVL	primary	SQD	Square D vault handle with lock for Type 3R/5/12 panelboard enclosures	EDH-SQD-00965	923

Number	Type	Mfr	Description	Catalogue ID	Pg
PK5FL	primary	SQD	Flush lock for 400 A NEHB main breaker fronts / telephone cabinet fronts 36 in+	EDH-SQD-00608	890
PK5RK	primary	SQD	Square D QO back-fed main breaker retaining kit PK5RK	EDH-SQD-00938	1003
PK-9GTA	primary	SQD	Square D equipment ground bar kit, 1-12 circuits (NQO/NQOB/NA1B/NH1B/NTFB/NTHB)	EDH-SQD-00554	901
PKDFSCREW	primary	SQD	Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)	EDH-SQD-00363	775
PKGTAB	primary	SQD	Equipment ground bar insulator kit	EDH-SQD-00126	848
PLK1	primary	EAT	Eaton padlockable handle lock hasp, F-frame 2-, 3-, 4-pole breakers	EDH-EAT-01278	387
PLK1LOFF	primary	EAT	Eaton padlockable handle lock hasp, F-frame, left side mounting, OFF only	EDH-EAT-01279	388
PLK1ROFF	primary	EAT	Eaton padlockable handle lock hasp, F-frame, right side mounting, OFF only	EDH-EAT-01280	388
PLK3	primary	EAT	Eaton padlockable handle lock hasp, J-, K-frame 2-, 3-, 4-pole	EDH-EAT-01281	388
PLK3LOFF	primary	EAT	Eaton padlockable handle lock hasp, J-, K-frame left side mounting, OFF only	EDH-EAT-01282	388
PLK3ROFF	primary	EAT	Eaton padlockable handle lock hasp, J-, K-frame right side mounting, OFF only	EDH-EAT-01283	389
PLK5	primary	EAT	Eaton padlockable handle lock hasp, N-frame side mounted	EDH-EAT-01288	389
PLK55OFF	primary	EAT	Eaton Series G Padlockable handle lock hasp OFF-only, NG	EDH-EAT-01304	389
PLK5S	primary	EAT	Eaton padlockable handle lock hasp, N-frame top mounted	EDH-EAT-01289	389
PLK5SOFF	primary	EAT	Eaton padlockable handle lock hasp, N-frame top mounted	EDH-EAT-01290	390
PLL44	primary	SIE	Blue Pennant switchboard PUG/WPUG pull-section lug landing kit	EDH-SIE-00661	1739
PLL46	primary	SIE	Blue Pennant switchboard PUG/WPUG pull-section lug landing kit	EDH-SIE-00662	1740
PLL48	primary	SIE	Blue Pennant switchboard PUG/WPUG pull-section lug landing kit	EDH-SIE-00663	1740
PLN2	primary	EAT	Series C J-frame plug nut (.250-20)	EDH-EAT-00615	567
PLN2M	primary	EAT	Series C J-frame plug nut (M6)	EDH-EAT-00616	568
PLW10	primary	SIE	Super Blue Pennant pull section	EDH-SIE-00740	1746
PM2657	primary	SIE	E/ED/CLE frame plug-in mounting assembly, 3-pole, line end	EDH-SIE-00476	1764
PM2658	primary	SIE	E/ED/CLE frame plug-in mounting assembly, 3-pole, load end	EDH-SIE-00477	1764
PM4754	primary	SIE	F/FD frame plug-in mounting assembly, 3-pole	EDH-SIE-00483	1770
PM5663	primary	SIE	MD frame plug-in adaptor, 3-pole	EDH-SIE-00515	1798
PM5666	primary	SIE	MD/ND frame plug-in adaptor, 3-pole, line	EDH-SIE-00512	1798
PPLLC	primary	SQD	I-Line PowerPacT L vertical main line lug cover (US SE); requires LTSM3P	EDH-SQD-00161	741
PQ2612	primary	SIE	Super Blue Pennant distribution panel kit 400/600 A (12 QP/HQ + 12 QJ2/QJH2 pole	EDH-SIE-00723	1744
PQ2630	primary	SIE	Super Blue Pennant distribution panel kit 400/600 A (30 QP/HQ poles)	EDH-SIE-00722	1744
PQ2816	primary	SIE	Super Blue Pennant distribution panel kit 800 A (12 QP/HQ + 16 QJ2/QJH2)	EDH-SIE-00729	1744
PQ2840	primary	SIE	Super Blue Pennant distribution panel kit 800 A (40 QP/HQ)	EDH-SIE-00728	1745
PQ4612	primary	SIE	Super Blue Pennant distribution panel kit 400/600 A (12 QP/HQ + 12 QJ2/QJH2)	EDH-SIE-00725	1745
PQ4630	primary	SIE	Super Blue Pennant distribution panel kit 400/600 A (30 QP/HQ)	EDH-SIE-00724	1745
PQ4818	primary	SIE	Super Blue Pennant distribution panel kit 800 A (12 QP/HQ + 18 QJ2/QJH2)	EDH-SIE-00731	1745
PQ4840	primary	SIE	Super Blue Pennant distribution panel kit 800 A (40 QP/HQ)	EDH-SIE-00730	1746
PRDBS1	primary	SIE	PD frame rear terminal barrier / connector strap & shield kit	EDH-SIE-00524	1806
PRLSEBBAB	primary	EAT	Service entrance barrier for BAB main breaker (PRL1X/2X/3X, PRL4X)	EDH-EAT-00791	314
PRLSEBFD	primary	EAT	Service entrance barrier kit for FD main breaker	EDH-EAT-00215	243
PRLSEBGHB	primary	EAT	Service entrance barrier kit for GHB main breaker	EDH-EAT-00216	243

Number	Type	Mfr	Description	Catalogue ID	Pg
PRLSEBJD	primary	EAT	Service entrance barrier kit for JD main breaker	EDH-EAT-00214	244
PRLSEBLGKD	primary	EAT	Service entrance barrier kit for LG and KD main breaker	EDH-EAT-00213	245
PRLSEBPD2	primary	EAT	Service entrance barrier kit for PDG2 main breaker	EDH-EAT-00218	315
PRLSEBPD3	primary	EAT	Service entrance barrier kit for PDF3/PDG3 main breaker	EDH-EAT-00217	316
PRLSEBPD4	primary	EAT	Service entrance barrier for PD4 main breaker (PRL1X/2X/3X, PRL4X)	EDH-EAT-00790	317
PRLSEBPD5	primary	EAT	Service entrance barrier for PD5 main breaker (PRL1X/2X/3X, PRL4X)	EDH-EAT-00789	318
PRXP4PD2FILL1	primary	EAT	Pow-R-Xpress PRL4X PD2 1-pole filler	EDH-EAT-00297	506
PSDS	primary	SQD	Square D circuit identification stickers for use on cover directory labels	EDH-SQD-00969	1052
PSFFJ6	primary	SIE	Super Blue Pennant circuit breaker subfeed kit, FXD6 225A	EDH-SIE-00734	1741
PSFJL6	primary	SIE	Super Blue Pennant circuit breaker subfeed kit, JXD6/JD6/HJD6 400A	EDH-SIE-00735	1741
PT363 top H01 / bottom H02 (7X); PT364 top H03 / bottom H04 (9X)	style_number	EAT	PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt swit	EDH-EAT-00266	366
PUG14	primary	SIE	Super Blue Pennant pull section	EDH-SIE-00736	1746
PUG26	primary	SIE	Super Blue Pennant pull section	EDH-SIE-00738	1746
PW30KT1NB	primary	EAT	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main lugs only 18 pol	EDH-EAT-00917	154
PW30KT3NB	primary	EAT	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main lugs only 3-ph 4	EDH-EAT-00923	154
PW34KT1NB	primary	EAT	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main lugs only 30 pol	EDH-EAT-00918	154
PW34KT2NB	primary	EAT	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main breaker 1-ph 3-w	EDH-EAT-00920	154
PW38KT1NB	primary	EAT	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main lugs only 42 pol	EDH-EAT-00919	155
PW42KT1NB	primary	EAT	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main breaker 30 poles	EDH-EAT-00921	155
PW50KT1NB	primary	EAT	Type PB panelboard deadfront cover kit, 21.00 in wide box (Main breaker 42 poles	EDH-EAT-00922	155
Q1100AN	primary	SQD	Add-on neutral/ground lug, 80-100 A	EDH-SQD-00111	804
Q1150AN	primary	SQD	NQ Add-on neutral/ground lug	EDH-SQD-00059	837
Q15	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ15 (Zinsco Q Series - Q15, 15 A	EDH-OTH-00108	1881
Q20	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ20 (Zinsco Q Series - Q20, 20 A	EDH-OTH-00109	1883
Q30	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ30 (Zinsco Q Series - Q30, 30 A	EDH-OTH-00110	1889
QC123PL	primary	EAT	Eaton Handle lock, padlockable, QUICKLAG Type C single-, two- and three-pole	EDH-EAT-01247	299
QC123PLOFF	primary	EAT	Eaton Handle lock, padlockable, QUICKLAG Type C single-, two- and three-pole	EDH-EAT-01249	299
QC20	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ220 (Zinsco QC Series - QC20, 2	EDH-OTH-00111	1885
QC30	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ230 (Zinsco QC Series - QC30, 3	EDH-OTH-00112	1885
QC40	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ240 (Zinsco QC Series - QC40, 4	EDH-OTH-00113	1886
QC50	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ250 (Zinsco QC Series - QC50, 5	EDH-OTH-00114	1886
QCAL100	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ2100 (Zinsco QC Series - QCAL10	EDH-OTH-00119	1884
QCAL125	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ2125 (Zinsco QC Series - QCAL12	EDH-OTH-00120	1884
QCAL60	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ260 (Zinsco QC Series - QCAL60,	EDH-OTH-00115	1887

Number	Type	Mfr	Description	Catalogue ID	Pg
QCAL70	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ270 (Zinsco QC Series - QCAL70,	EDH-OTH-00116	1887
QCAL80	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ280 (Zinsco QC Series - QCAL80,	EDH-OTH-00117	1888
QCAL90	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ290 (Zinsco QC Series - QCAL90,	EDH-OTH-00118	1888
QF3	equivalent	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	1672
QF3	primary	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	1482
QFP2T	primary	ZIN	Zinsco QFP 2-pole main breaker mounting hardware / feet (base)	EDH-ZIN-00022	1877
QJ64K	alias	OTH	Aftermarket bus connection kit BQJSITE (seller cross-ref to SIE SQJ)	EDH-OTH-00062	1523
QJ65K	alias	OTH	Aftermarket bus connection kit BQJITE (seller cross-ref to SIE 6QJ2)	EDH-OTH-00055	1717
QL123PL	primary	EAT	Eaton Handle lock, padlockable, QUICKLAG Type P, B and ground fault single-, two	EDH-EAT-01246	299
QL123PLOFF	primary	EAT	Eaton Handle lock, padlockable, QUICKLAG Type P, B single-, two- and three-pole	EDH-EAT-01248	300
QL1HT	primary	EAT	Eaton QUICKLAG handle tie - single-pole	EDH-EAT-01250	297
QL1NPL	primary	EAT	Eaton Handle lock, non-padlockable, QUICKLAG Type P, B, C single-pole	EDH-EAT-01243	297
QL1PL	primary	EAT	Eaton Handle lock, padlockable, QUICKLAG Type P, B, C single-pole	EDH-EAT-01245	300
QL23NPL	primary	EAT	Eaton Handle lock, non-padlockable, QUICKLAG Type P, B, C two- and three-pole	EDH-EAT-01244	297
QLBHTSE	primary	EAT	Eaton QUICKLAG binding head terminal screw and clamp, terminal type 5	EDH-EAT-01254	290
QLLDTSA	primary	EAT	Eaton QUICKLAG terminal screw, terminal type 1	EDH-EAT-01251	290
QLLDTSB	primary	EAT	Eaton QUICKLAG terminal screw, terminal type 2	EDH-EAT-01252	290
QLLDTSC	primary	EAT	Eaton QUICKLAG terminal screw, terminal type 3	EDH-EAT-01253	290
QLLNTSFG	primary	EAT	Eaton QUICKLAG terminal screw, terminal types 6 and 7	EDH-EAT-01255	291
QM-1BL	primary	SQD	Square D QMB (QM interior) blank, 1-1/2 in	EDH-SQD-00564	982
QM-1SN	primary	SQD	Square D QMB solid neutral assembly 200 A	EDH-SQD-00568	981
QM-2SN	primary	SQD	Square D QMB solid neutral assembly 200 A	EDH-SQD-00569	981
QM-2SN	equivalent	SQD	QMB solid neutral assembly 225 A	EDH-SQD-00881	931
QM-3132-B	primary	SQD	Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 32 in H	EDH-SQD-00862	985
QM-3132-TS	primary	SQD	Legacy 1970 QMB (QM) 4-piece front for QM-3132-B box	EDH-SQD-00863	983
QM-3144-B	primary	SQD	Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 44 in H	EDH-SQD-00864	985
QM-3144-TS	primary	SQD	Legacy 1970 QMB (QM) 4-piece front for QM-3144-B box	EDH-SQD-00865	984
QM-3156-B	primary	SQD	Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 56 in H	EDH-SQD-00866	985
QM-3156-TS	primary	SQD	Legacy 1970 QMB (QM) 4-piece front for QM-3156-B box	EDH-SQD-00867	984
QM-3168-B	primary	SQD	Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 68 in H	EDH-SQD-00868	986
QM-3168-TS	primary	SQD	Legacy 1970 QMB (QM) 4-piece front for QM-3168-B box	EDH-SQD-00869	984
QM-3180-B	primary	SQD	Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 80 in H	EDH-SQD-00870	986
QM-3180-TS	primary	SQD	Legacy 1970 QMB (QM) 4-piece front for QM-3180-B box	EDH-SQD-00871	984
QM-3192-B	primary	SQD	Legacy 1970 QMB (QM) box, 31 in W x 10-5/8 in D x 92 in H	EDH-SQD-00872	986
QM-3192-TS	primary	SQD	Legacy 1970 QMB (QM) 4-piece front for QM-3192-B box	EDH-SQD-00873	984
QM38756TS	primary	SQD	QMB RTI 4-piece standard front QM38756TS	EDH-SQD-00876	934
QM3875B	primary	SQD	QMB RTI box, 38 in W x 75 in H	EDH-SQD-00874	935
QM389012TS	primary	SQD	QMB RTI 4-piece standard front QM389012TS	EDH-SQD-00880	934
QM38902TS	primary	SQD	QMB RTI 4-piece standard front QM38902TS	EDH-SQD-00877	934
QM38906TS	primary	SQD	QMB RTI 4-piece standard front QM38906TS	EDH-SQD-00878	934
QM38908TS	primary	SQD	QMB RTI 4-piece standard front QM38908TS	EDH-SQD-00879	935
QM3890B	primary	SQD	QMB RTI box, 38 in W x 90 in H	EDH-SQD-00875	935
QM-3BL	primary	SQD	Square D QMB (QM interior) blank, 3 in	EDH-SQD-00565	982

Number	Type	Mfr	Description	Catalogue ID	Pg
QM-4SN	primary	SQD	Square D QMB solid neutral assembly 400 A	EDH-SQD-00570	981
QM-4SN	equivalent	SQD	QMB solid neutral assembly 400 A	EDH-SQD-00882	931
QM-6BL	primary	SQD	Square D QMB (QM interior) blank, 6 in	EDH-SQD-00566	982
QM-6SN	primary	SQD	Square D QMB solid neutral assembly 600 A	EDH-SQD-00571	981
QM-6SN	equivalent	SQD	QMB solid neutral assembly 600 A	EDH-SQD-00883	932
QM-9BL	primary	SQD	Square D QMB (QM interior) blank, 9 in	EDH-SQD-00567	982
QMB100R	primary	SQD	QMB Class R fuse kit QMB100R	EDH-SQD-00275	974
QMB-103-AL	primary	SQD	Square D QMB adaptor kit, convert one 100 A switch to 30 A (250 V units only)	EDH-SQD-00573	987
QMB-106-AL	primary	SQD	Square D QMB adaptor kit, convert one 100 A switch to 60 A (250 V units only)	EDH-SQD-00574	987
QMB12CLA	primary	SQD	QMB main lug compression adaptor kit QMB12CLA (1200 A)	EDH-SQD-00301	924
QMB12SN	primary	SQD	QMB solid neutral assembly 1200 A	EDH-SQD-00885	931
QMB15BLW	primary	SQD	QMB blank filler plate QMB15BLW (15 in.)	EDH-SQD-00312	933
QMB1BLW	primary	SQD	QMB blank filler plate QMB1BLW (1.5 in.)	EDH-SQD-00309	933
QMB1IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB1IMA	EDH-SQD-00313	940
QMB200EK	primary	SQD	QMB electrical interlock kit QMB200EK	EDH-SQD-00282	974
QMB200EK-1	alias	SQD	QMB electrical interlock kit QMB200EK	EDH-SQD-00282	974
QMB200EK-2	alias	SQD	QMB electrical interlock kit QMB200EK	EDH-SQD-00282	974
QMB-206-EX	primary	SQD	Square D QMB 2-pole extension assembly, 6 in unit (600 V, 38 in wide QMB)	EDH-SQD-00575	979
QMB-210-EX	primary	SQD	Square D QMB 2-pole extension assembly, 7-1/2 in unit (600 V, 38 in wide QMB)	EDH-SQD-00576	979
QMB210T	primary	SQD	Legacy QMB switch QMB210T (obsolete)	EDH-SQD-00321	991
QMB-220-EX	primary	SQD	Square D QMB 2-pole extension assembly, 9 in unit (600 V, 38 in wide QMB)	EDH-SQD-00577	979
QMB221HW	primary	SQD	QMB fusible switch unit QMB221HW (2P 240 Vac, 30-blank A)	EDH-SQD-00222	944
QMB221TW	primary	SQD	QMB fusible switch unit QMB221TW (2P 240 Vac, 30-30 A)	EDH-SQD-00221	945
QMB222HW	primary	SQD	QMB fusible switch unit QMB222HW (2P 240 Vac, 60-blank A)	EDH-SQD-00224	945
QMB222TW	primary	SQD	QMB fusible switch unit QMB222TW (2P 240 Vac, 60-60 A)	EDH-SQD-00223	946
QMB223HW	primary	SQD	QMB fusible switch unit QMB223HW (2P 240 Vac, 100-blank A)	EDH-SQD-00226	946
QMB223TW	primary	SQD	QMB fusible switch unit QMB223TW (2P 240 Vac, 100-100 A)	EDH-SQD-00225	947
QMB2240	primary	SQD	Legacy QMB switch QMB2240 (obsolete)	EDH-SQD-00324	991
QMB224W	primary	SQD	QMB fusible switch unit QMB224W (2P 240 Vac, 200 A)	EDH-SQD-00227	947
QMB225W	primary	SQD	QMB fusible switch unit QMB225W (2P 240 Vac, 400 A)	EDH-SQD-00228	948
QMB225WT3	primary	SQD	QMB fusible switch unit QMB225WT3 (2P 240 Vac, 400 A)	EDH-SQD-00229	948
QMB261HW	primary	SQD	QMB fusible switch unit QMB261HW (2P 600 Vac, 30-blank A)	EDH-SQD-00243	949
QMB261TW	primary	SQD	QMB fusible switch unit QMB261TW (2P 600 Vac, 30-30 A)	EDH-SQD-00242	949
QMB262HW	primary	SQD	QMB fusible switch unit QMB262HW (2P 600 Vac, 60-blank A)	EDH-SQD-00245	950
QMB262TW	primary	SQD	QMB fusible switch unit QMB262TW (2P 600 Vac, 60-60 A)	EDH-SQD-00244	950
QMB263HW	primary	SQD	QMB fusible switch unit QMB263HW (2P 600 Vac, 100-blank A)	EDH-SQD-00247	951
QMB263TW	primary	SQD	QMB fusible switch unit QMB263TW (2P 600 Vac, 100-100 A)	EDH-SQD-00246	951
QMB264W	primary	SQD	QMB fusible switch unit QMB264W (2P 600 Vac, 200 A)	EDH-SQD-00248	952
QMB2IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB2IMA	EDH-SQD-00314	940
QMB2SN	primary	SQD	QMB solid neutral assembly 225 A	EDH-SQD-00881	931
QMB300EK	primary	SQD	QMB electrical interlock kit QMB300EK	EDH-SQD-00280	975
QMB300EK-1	alias	SQD	QMB electrical interlock kit QMB300EK	EDH-SQD-00280	975
QMB300EK-2	alias	SQD	QMB electrical interlock kit QMB300EK	EDH-SQD-00280	975
QMB303LEX	primary	SQD	QMB plug-on extension assembly for 30-30 A 3 in switch (QW interiors)	EDH-SQD-00898	980
QMB303T	primary	SQD	Legacy QMB switch QMB303T (obsolete)	EDH-SQD-00355	992
QMB306EX	primary	SQD	QMB plug-on extension assembly QMB306EX (legacy QW retrofit)	EDH-SQD-00326	938

Number	Type	Mfr	Description	Catalogue ID	Pg
QMB-306-EX	alias	SQD	QMB plug-on extension assembly QMB306EX (legacy QW retrofit)	EDH-SQD-00326	938
QMB306LEX	primary	SQD	QMB plug-on extension assembly QMB306LEX (legacy QW retrofit)	EDH-SQD-00327	987
QMB306T	primary	SQD	Legacy QMB switch QMB306T (obsolete)	EDH-SQD-00356	992
QMB310EX	primary	SQD	QMB plug-on extension assembly QMB310EX (legacy QW retrofit)	EDH-SQD-00328	938
QMB-310-EX	alias	SQD	QMB plug-on extension assembly QMB310EX (legacy QW retrofit)	EDH-SQD-00328	938
QMB310LEX	primary	SQD	QMB plug-on extension assembly QMB310LEX (legacy QW retrofit)	EDH-SQD-00329	987
QMB310T	primary	SQD	Legacy QMB switch QMB310T (obsolete)	EDH-SQD-00320	992
QMB3203T	primary	SQD	Obsolete QMB Series 1-4 branch switch QMB3203T (30-30 A 240 Vac, 4.5 in)	EDH-SQD-00899	988
QMB320EX	primary	SQD	QMB plug-on extension assembly QMB320EX (legacy QW retrofit)	EDH-SQD-00330	939
QMB-320-EX	alias	SQD	QMB plug-on extension assembly QMB320EX (legacy QW retrofit)	EDH-SQD-00330	939
QMB3210M	primary	SQD	Obsolete QMB Series 4 main switch unit QMB3210M (100 A 240 Vac)	EDH-SQD-00903	989
QMB321HW	primary	SQD	QMB fusible switch unit QMB321HW (3P 240 Vac, 30-blank A)	EDH-SQD-00231	952
QMB321T	superseded_by	SQD	Obsolete QMB Series 1-4 branch switch QMB3203T (30-30 A 240 Vac, 4.5 in)	EDH-SQD-00899	988
QMB321TW	primary	SQD	QMB fusible switch unit QMB321TW (3P 240 Vac, 30-30 A)	EDH-SQD-00230	953
QMB3220	primary	SQD	Obsolete QMB Series 1-4 branch switch QMB3220 (200 A 240 Vac, 9 in)	EDH-SQD-00900	989
QMB3220M	primary	SQD	Obsolete QMB Series 4 main switch unit QMB3220M (200 A 240 Vac)	EDH-SQD-00904	989
QMB322HW	primary	SQD	QMB fusible switch unit QMB322HW (3P 240 Vac, 60-blank A)	EDH-SQD-00233	953
QMB322TD	alias	SQD	QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)	EDH-SQD-00232	953
QMB322TW	primary	SQD	QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)	EDH-SQD-00232	953
QMB323HW	primary	SQD	QMB fusible switch unit QMB323HW (3P 240 Vac, 100-blank A)	EDH-SQD-00235	954
QMB323M	superseded_by	SQD	Obsolete QMB Series 4 main switch unit QMB3210M (100 A 240 Vac)	EDH-SQD-00903	989
QMB323MW	primary	SQD	QMB main switch replacement unit 100 A 3P 240 Vac (replaces Series E1)	EDH-SQD-00889	955
QMB323TD	alias	SQD	QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)	EDH-SQD-00234	955
QMB323TD	primary	SQD	QMB replacement switch QMB323TD for legacy interiors	EDH-SQD-00337	992
QMB323TW	primary	SQD	QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)	EDH-SQD-00234	955
QMB324	superseded_by	SQD	Obsolete QMB Series 1-4 branch switch QMB3220 (200 A 240 Vac, 9 in)	EDH-SQD-00900	989
QMB3240	primary	SQD	Legacy QMB switch QMB3240 (obsolete)	EDH-SQD-00323	992
QMB324M	superseded_by	SQD	Obsolete QMB Series 4 main switch unit QMB3220M (200 A 240 Vac)	EDH-SQD-00904	989
QMB324M	primary	SQD	QMB obsolescent main switch unit QMB324M (200 A 240 Vac, replaces Series 4)	EDH-SQD-00909	989
QMB324MW	primary	SQD	QMB main switch replacement unit 200 A 3P 240 Vac (replaces Series E1)	EDH-SQD-00890	955
QMB324W	primary	SQD	QMB fusible switch unit QMB324W (3P 240 Vac, 200 A)	EDH-SQD-00236	956
QMB325MW	primary	SQD	QMB main switch replacement unit 400 A 3P 240 Vac (replaces Series E1)	EDH-SQD-00891	956
QMB325W	primary	SQD	QMB fusible switch unit QMB325W (3P 240 Vac, 400 A)	EDH-SQD-00237	957
QMB325WT3	primary	SQD	QMB fusible switch unit QMB325WT3 (3P 240 Vac, 400 A)	EDH-SQD-00238	957
QMB3260	primary	SQD	Legacy QMB switch QMB3260 (obsolete)	EDH-SQD-00325	993
QMB326MW	primary	SQD	QMB main switch replacement unit 600 A 3P 240 Vac (replaces Series E1)	EDH-SQD-00892	958
QMB326W	primary	SQD	QMB fusible switch unit QMB326W (3P 240 Vac, 600 A)	EDH-SQD-00239	958

Number	Type	Mfr	Description	Catalogue ID	Pg
QMB326WT3	primary	SQD	QMB fusible switch unit QMB326WT3 (3P 240 Vac, 600 A)	EDH-SQD-00240	959
QMB327WT3	primary	SQD	QMB fusible switch unit QMB327WT3 (3P 240 Vac, 800 A)	EDH-SQD-00241	959
QMB3300LA	primary	SQD	QMB circuit breaker unit QMB3300LA	EDH-SQD-00332	980
QMB3400LA	primary	SQD	QMB circuit breaker unit QMB3400LA	EDH-SQD-00331	980
QMB3603T	primary	SQD	Obsolete QMB Series 1-4 branch switch QMB3603T (30-30 A 600 Vac, 4.5 in)	EDH-SQD-00901	989
QMB3606T	primary	SQD	Legacy QMB switch QMB3606T (obsolete)	EDH-SQD-00319	993
QMB3610M	primary	SQD	Obsolete QMB Series 4 main switch unit QMB3610M (100 A 600 Vac)	EDH-SQD-00905	990
QMB3610MJ	primary	SQD	Obsolete QMB Series 4 main switch unit QMB3610MJ (100 A 600 Vac, Class J)	EDH-SQD-00906	990
QMB3610T	primary	SQD	Obsolete QMB Series 1-4 branch switch QMB3610T (100-100 A 600 Vac, 7.5 in)	EDH-SQD-00902	990
QMB361HW	primary	SQD	QMB fusible switch unit QMB361HW (3P 600 Vac, 30-blank A)	EDH-SQD-00250	960
QMB361T	superseded_by	SQD	Obsolete QMB Series 1-4 branch switch QMB3603T (30-30 A 600 Vac, 4.5 in)	EDH-SQD-00901	989
QMB361TW	primary	SQD	QMB fusible switch unit QMB361TW (3P 600 Vac, 30-30 A)	EDH-SQD-00249	960
QMB3620	primary	SQD	Legacy QMB switch QMB3620 (obsolete)	EDH-SQD-00322	993
QMB3620M	primary	SQD	Obsolete QMB Series 4 main switch unit QMB3620M (200 A 600 Vac)	EDH-SQD-00907	990
QMB3620MJ	primary	SQD	Obsolete QMB Series 4 main switch unit QMB3620MJ (200 A 600 Vac, Class J)	EDH-SQD-00908	990
QMB362HW	primary	SQD	QMB fusible switch unit QMB362HW (3P 600 Vac, 60-blank A)	EDH-SQD-00252	961
QMB362T	alias	SQD	QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)	EDH-SQD-00251	962
QMB362T	primary	SQD	QMB replacement switch QMB362T for legacy interiors	EDH-SQD-00335	993
QMB362T21W	primary	SQD	QMB fusible switch unit QMB362T21W (3P 600 Vac, 60-30 A)	EDH-SQD-00253	961
QMB362TW	primary	SQD	QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)	EDH-SQD-00251	962
QMB363HW	primary	SQD	QMB fusible switch unit QMB363HW (3P 600 Vac, 100-blank A)	EDH-SQD-00255	962
QMB363M	superseded_by	SQD	Obsolete QMB Series 4 main switch unit QMB3610M (100 A 600 Vac)	EDH-SQD-00905	990
QMB363MJ	superseded_by	SQD	Obsolete QMB Series 4 main switch unit QMB3610MJ (100 A 600 Vac, Class J)	EDH-SQD-00906	990
QMB363MW	primary	SQD	QMB main switch replacement unit 100 A 3P 600 Vac (replaces Series E1)	EDH-SQD-00893	963
QMB363T	superseded_by	SQD	Obsolete QMB Series 1-4 branch switch QMB3610T (100-100 A 600 Vac, 7.5 in)	EDH-SQD-00902	990
QMB363T31W	primary	SQD	QMB fusible switch unit QMB363T31W (3P 600 Vac, 100-30 A)	EDH-SQD-00256	963
QMB363T32W	primary	SQD	QMB fusible switch unit QMB363T32W (3P 600 Vac, 100-60 A)	EDH-SQD-00257	964
QMB363TW	primary	SQD	QMB fusible switch unit QMB363TW (3P 600 Vac, 100-100 A)	EDH-SQD-00254	964
QMB364	superseded_by	SQD	Legacy QMB switch QMB3620 (obsolete)	EDH-SQD-00322	993
QMB364	primary	SQD	QMB replacement switch QMB364 for legacy interiors	EDH-SQD-00336	994
QMB3640	primary	SQD	Legacy QMB switch QMB3640 (obsolete)	EDH-SQD-00354	994
QMB364M	superseded_by	SQD	Obsolete QMB Series 4 main switch unit QMB3620M (200 A 600 Vac)	EDH-SQD-00907	990
QMB364M	primary	SQD	QMB obsolescent main switch unit QMB364M (200 A 600 Vac, replaces Series 4)	EDH-SQD-00910	991
QMB364MJ	superseded_by	SQD	Obsolete QMB Series 4 main switch unit QMB3620MJ (200 A 600 Vac, Class J)	EDH-SQD-00908	990
QMB364MW	primary	SQD	QMB main switch replacement unit 200 A 3P 600 Vac (replaces Series E1)	EDH-SQD-00894	965
QMB364W	primary	SQD	QMB fusible switch unit QMB364W (3P 600 Vac, 200 A)	EDH-SQD-00258	965
QMB365MW	primary	SQD	QMB main switch replacement unit 400 A 3P 600 Vac (replaces Series E1)	EDH-SQD-00895	965
QMB365W	primary	SQD	QMB fusible switch unit QMB365W (3P 600 Vac, 400 A)	EDH-SQD-00259	966
QMB365WT6	primary	SQD	QMB fusible switch unit QMB365WT6 (3P 600 Vac, 400 A)	EDH-SQD-00260	966

Number	Type	Mfr	Description	Catalogue ID	Pg
QMB366MW	primary	SQD	QMB main switch replacement unit 600 A 3P 600 Vac (replaces Series E1)	EDH-SQD-00896	967
QMB366W	primary	SQD	QMB fusible switch unit QMB366W (3P 600 Vac, 600 A)	EDH-SQD-00261	967
QMB367MW	primary	SQD	QMB main switch replacement unit 800 A 3P 600 Vac (replaces Series E1)	EDH-SQD-00897	967
QMB367W	primary	SQD	QMB fusible switch unit QMB367W (3P 600 Vac, 800 A)	EDH-SQD-00262	968
QMB368W	primary	SQD	QMB fusible switch unit QMB368W (3P 600 Vac, 1200 A, 24 in.)	EDH-SQD-00263	999
QMB36R	primary	SQD	QMB Class R fuse kit QMB36R	EDH-SQD-00273	975
QMB3BLW	primary	SQD	QMB blank filler plate QMB3BLW (3 in.)	EDH-SQD-00310	933
QMB3IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB3IMA	EDH-SQD-00315	940
QMB400J	primary	SQD	QMB main switch Class J fuse spacing adapter, 400 A (with QMB365MW)	EDH-SQD-00887	972
QMB400T6	primary	SQD	QMB main switch Class T fuse spacing adapter, 400 A (with QMB365MW)	EDH-SQD-00886	972
QMB4060R	primary	SQD	QMB Class R fuse kit QMB4060R	EDH-SQD-00277	975
QMB4IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB4IMA	EDH-SQD-00316	941
QMB4SN	primary	SQD	QMB solid neutral assembly 400 A	EDH-SQD-00882	931
QMB600J	primary	SQD	QMB main switch Class J fuse spacing adapter, 600 A (with QMB366MW)	EDH-SQD-00888	972
QMB600T6	primary	SQD	QMB Class T fuse adapter kit QMB600T6	EDH-SQD-00278	939
QMB60R	primary	SQD	QMB Class R fuse kit QMB60R	EDH-SQD-00274	976
QMB610EK	primary	SQD	QMB electrical interlock kit QMB610EK	EDH-SQD-00281	976
QMB610EK-1	alias	SQD	QMB electrical interlock kit QMB610EK	EDH-SQD-00281	976
QMB610EK-2	alias	SQD	QMB electrical interlock kit QMB610EK	EDH-SQD-00281	976
QMB-63-AL	primary	SQD	Square D QMB adaptor kit, convert one 60 A switch to 30 A (250 V units only)	EDH-SQD-00572	988
QMB6BLW	primary	SQD	QMB blank filler plate QMB6BLW (6 in.)	EDH-SQD-00311	934
QMB6SN	primary	SQD	QMB solid neutral assembly 600 A	EDH-SQD-00883	932
QMB800T6	primary	SQD	QMB Class T fuse adapter kit QMB800T6	EDH-SQD-00279	939
QMB8CLA	primary	SQD	QMB main lug compression adaptor kit QMB8CLA (800 A)	EDH-SQD-00300	924
QMB8IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB8IMA	EDH-SQD-00317	941
QMB8SN	primary	SQD	QMB solid neutral assembly 800 A	EDH-SQD-00884	932
QMBHW	primary	SQD	QMB circuit breaker adapter unit for H-frame breaker	EDH-SQD-00219	930
QMBJW	primary	SQD	QMB circuit breaker adapter unit for J-frame breaker	EDH-SQD-00220	931
QMJ361T	primary	SQD	QMJ fusible switch unit QMJ361T (30-30 A)	EDH-SQD-00264	968
QMJ362T	primary	SQD	QMJ fusible switch unit QMJ362T (60-60 A)	EDH-SQD-00265	969
QMJ363H	primary	SQD	QMJ fusible switch unit QMJ363H (100-blank A)	EDH-SQD-00267	969
QMJ363T	primary	SQD	QMJ fusible switch unit QMJ363T (100-100 A)	EDH-SQD-00266	970
QMJ364H	primary	SQD	QMJ fusible switch unit QMJ364H (200-blank A)	EDH-SQD-00269	970
QMJ364T	primary	SQD	QMJ fusible switch unit QMJ364T (200-200 A)	EDH-SQD-00268	971
QMJ365	primary	SQD	QMJ fusible switch unit QMJ365 (400 A)	EDH-SQD-00270	971
QMJ366	primary	SQD	QMJ fusible switch unit QMJ366 (600 A)	EDH-SQD-00271	972
QMRFP1	primary	GEA	QMR panelboard filler plate 1X	EDH-GEA-00272	1129
QMRFP2	primary	GEA	QMR panelboard filler plate 2X	EDH-GEA-00273	1129
QMRFP3	primary	GEA	GE QMR full-width filler, 3X, 4.125 in x 24 in	EDH-GEA-00610	1129
QMRFP5	primary	GEA	QMR panelboard filler plate 5X	EDH-GEA-00274	1130
QO-100ASF	primary	SQD	Square D 100 A sub-feed lug kit for main-lug NQO panelboards	EDH-SQD-00549	899
QO-1CP	primary	SQD	Square D closure plate for twistout in NQO, NQOB and NA1B interior trims	EDH-SQD-00551	902
QO1HPL	primary	SQD	Square D QO 2P/3P handle padlock attachment, loose	EDH-SQD-00929	885
QO-1HT	primary	SQD	Square D handle tie for QO / QOB (two 1-pole to 2-pole individual trip)	EDH-SQD-00541	881

Number	Type	Mfr	Description	Catalogue ID	Pg
QO1LO	primary	SQD	Square D QO 1P handle clamp (lock-off/lock-on, non-padlocking)	EDH-SQD-00925	883
QO-1PA	primary	SQD	Square D handle padlock attachment, 1-pole QO/QOB/Q1/Q1B/QFSB/HFSB	EDH-SQD-00543	886
QO1PAF	primary	SQD	Square D QO 1P padlock attachment, OFF only, fixed	EDH-SQD-00930	886
QO1PJ15	primary	SQD	Jaw accessory kit for QOB breaker on NQ (fingersafe IP2X)	EDH-SQD-00044	881
QO-1PL	primary	SQD	Square D handle padlock attachment, 2/3-pole QO/QOB/Q1/Q1B	EDH-SQD-00544	886
QO1SE	primary	SQD	Square D QO load center cover sealing strap	EDH-SQD-00967	1051
QO-225ASF	primary	SQD	Square D 225 A sub-feed lug kit for main-lug NQO panelboards	EDH-SQD-00550	900
QO2DTI	primary	SQD	Square D QO mechanical interlock attachment (two 2P or 2P+1P side by side)	EDH-SQD-00934	882
QO2DTIM	primary	SQD	Square D QO2DTI interlock with retaining kits for back-fed breakers	EDH-SQD-00935	874
QO2PAF	primary	SQD	Square D QO 2P/3P padlock attachment, OFF only, fixed	EDH-SQD-00932	887
QO3HT	primary	SQD	Square D QO 3-pole handle tie	EDH-SQD-00924	884
QO70AN	primary	SQD	NQ Add-on neutral lug for 70 A QO(B)	EDH-SQD-00061	837
QOADV1PAF	primary	SQD	Square D QO 1P padlock attachment, OFF only, for QO-GFI/CAFI/DF/EPD	EDH-SQD-00931	887
QOB2125SL	primary	SQD	2-pole QOB branch mounted sub-feed lug kit	EDH-SQD-00056	833
QOB3125SL	primary	SQD	3-pole QOB branch mounted sub-feed lug kit	EDH-SQD-00057	834
QOBRT	primary	SQD	QOB breaker removal kit (Enhanced IP2X NQ)	EDH-SQD-00586	874
QOFSBF	alias	SQD	NQ IP2X bus finger filler (fingersafe replacement part), pkg of 12	EDH-SQD-00578	853
QOFSBF12	primary	SQD	NQ IP2X bus finger filler (fingersafe replacement part), pkg of 12	EDH-SQD-00578	853
QOFSHALB	alias	SQD	NQ IP2X QO(B) lug cover, high amp (fingersafe replacement), pkg of 12	EDH-SQD-00580	882
QOFSHALB12	primary	SQD	NQ IP2X QO(B) lug cover, high amp (fingersafe replacement), pkg of 12	EDH-SQD-00580	882
QOFSLALB	alias	SQD	NQ IP2X QO(B) lug cover, low amp (fingersafe replacement), pkg of 12	EDH-SQD-00579	882
QOFSLALB12	primary	SQD	NQ IP2X QO(B) lug cover, low amp (fingersafe replacement), pkg of 12	EDH-SQD-00579	882
QOGFI2PAF	primary	SQD	Square D 2P QO-GFI/CAFI/EPD padlock attachment, OFF only	EDH-SQD-00933	887
QOHPL	primary	SQD	Square D QO 1P handle padlock attachment, loose	EDH-SQD-00926	887
QOTHPA	primary	SQD	Square D QOT 1P side-by-side handle padlock attachment (obsolete)	EDH-SQD-00927	888
QOTHT	primary	SQD	Square D QOT handle tie	EDH-SQD-00923	884
QSF100DS	primary	ZIN	Zinsco QSF switch kit 100 A, double slot, mounting hardware	EDH-ZIN-00001	1874
QSF100SB	primary	ZIN	Sylvania QSF single slot switch kit, split buss, 100 A	EDH-ZIN-00014	1874
QSF100SS	primary	ZIN	Sylvania QSF 100 A twin kit	EDH-ZIN-00013	1874
QSF200DS	primary	ZIN	Zinsco QSF 200 A double slot mounting hardware	EDH-ZIN-00002	1874
QSF200SB	primary	ZIN	Sylvania QSF single slot switch kit, split buss, 200 A	EDH-ZIN-00015	1875
QSF400DS	primary	ZIN	Zinsco/Sylvania QSF 400 A switch kit, double slot	EDH-ZIN-00003	1875
QSF400SB	primary	ZIN	Sylvania QSF single slot switch kit, split buss (listed 200 A; number implies 40	EDH-ZIN-00016	1875
QSF600DS	primary	ZIN	Zinsco QSF 600 A double slot mounting hardware	EDH-ZIN-00004	1875
QSFB	primary	SQD	Square D QSFB switch/fuse unit from NTFB (basic NQOB) panel	EDH-SQD-00526	903
QW1BL	primary	SQD	Legacy QW interior blank filler QW1BL	EDH-SQD-00333	983
QW3BL	primary	SQD	Legacy QW interior blank filler QW3BL	EDH-SQD-00334	983
R3815	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ1515 (Zinsco R Series - R3815,	EDH-OTH-00121	1882
R381520	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ1520 (Zinsco R Series - R381520	EDH-OTH-00122	1882

Number	Type	Mfr	Description	Catalogue ID	Pg
R3820	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ2020 (Zinsco R Series - R3820,	EDH-OTH-00123	1883
R3830	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ3030 (Zinsco R Series - R3830,	EDH-OTH-00124	1889
RAABR10BXXX	primary	EAT	Cutler-Hammer compact BR retrofit kit RAABR10BXXX	EDH-EAT-00764	39
RAABR10BXXXA	primary	EAT	Cutler-Hammer compact BR retrofit kit RAABR10BXXXA	EDH-EAT-00765	39
RAABR12L125	primary	EAT	Cutler-Hammer compact BR retrofit kit RAABR12L125	EDH-EAT-00762	39
RAABR12L125A	primary	EAT	Cutler-Hammer compact BR retrofit kit RAABR12L125A	EDH-EAT-00763	40
RABR12B3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RABR12B3XXX	EDH-EAT-00748	41
RABR12H3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RABR12H3XXX	EDH-EAT-00749	42
RABR12L3125	primary	EAT	Cutler-Hammer BR retrofit kit RABR12L3125	EDH-EAT-00756	42
RABR20BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RABR20BXXX	EDH-EAT-00737	43
RABR20HXXX	primary	EAT	Cutler-Hammer BR retrofit kit RABR20HXXX	EDH-EAT-00738	43
RABR20L125	primary	EAT	Cutler-Hammer BR retrofit kit RABR20L125	EDH-EAT-00744	43
RACH18B3XXX	primary	EAT	Cutler-Hammer CH retrofit kit RACH18B3XXX	EDH-EAT-00722	45
RACH22BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RACH22BXXX	EDH-EAT-00706	45
RACH24L125	primary	EAT	Cutler-Hammer CH retrofit kit RACH24L125	EDH-EAT-00712	46
RACH24L125I	primary	EAT	Eaton CH retrofit stocking kit RACH24L125I	EDH-EAT-01232	32
RACH24L3125	primary	EAT	Cutler-Hammer CH retrofit kit RACH24L3125	EDH-EAT-00725	46
RACH30L3125	primary	EAT	Cutler-Hammer CH retrofit kit RACH30L3125	EDH-EAT-00726	47
RACH30L3225	primary	EAT	Cutler-Hammer CH retrofit kit RACH30L3225	EDH-EAT-00727	47
RBBR20BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR20BXXX	EDH-EAT-00741	48
RBBR24L3150	primary	EAT	Cutler-Hammer BR retrofit kit RBBR24L3150	EDH-EAT-00758	48
RBBR30BCXXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30BCXXX	EDH-EAT-00739	49
RBBR30BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30BXXX	EDH-EAT-00750	49
RBBR30H3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30H3XXX	EDH-EAT-00751	50
RBBR30HCXXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30HCXXX	EDH-EAT-00740	50
RBBR30L200	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30L200	EDH-EAT-00745	51
RBBR30L3100	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30L3100	EDH-EAT-00757	51
RBCH24BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RBCH24BXXX	EDH-EAT-00708	52
RBCH24D225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH24D225	EDH-EAT-00718	52
RBCH24D3225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH24D3225	EDH-EAT-00733	53
RBCH30BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RBCH30BXXX	EDH-EAT-00707	53
RBCH30D3225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH30D3225	EDH-EAT-00734	54
RBCH30L3225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH30L3225	EDH-EAT-00728	54
RBCH32D225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH32D225	EDH-EAT-00719	54
RBCH32L225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH32L225	EDH-EAT-00714	55
RBCH42L125	primary	EAT	Cutler-Hammer CH retrofit kit RBCH42L125	EDH-EAT-00713	56
RBCH42L225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH42L225	EDH-EAT-00715	56
RBCH42L3125	primary	EAT	Cutler-Hammer CH retrofit kit RBCH42L3125	EDH-EAT-00729	57
RBCH42L3225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH42L3225	EDH-EAT-00730	57
RC3820	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ0220 (Zinsco RC Series - RC3820	EDH-OTH-00125	1879
RC3830	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ0230 (Zinsco RC Series - RC3830	EDH-OTH-00126	1879
RC3840	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ0240 (Zinsco RC Series - RC3840	EDH-OTH-00127	1880
RC3850	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ0250 (Zinsco RC Series - RC3850	EDH-OTH-00128	1880
RC3860	equivalent	OTH	Connecticut Electric UBI replacement breaker UBIZ0260 (Zinsco RC Series - RC3860	EDH-OTH-00129	1881
RCBR30BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RCBR30BXXX	EDH-EAT-00742	58
RCBR30L3200	primary	EAT	Cutler-Hammer BR retrofit kit RCBR30L3200	EDH-EAT-00759	58
RCBR40L200	primary	EAT	Cutler-Hammer BR retrofit kit RCBR40L200	EDH-EAT-00746	59

Number	Type	Mfr	Description	Catalogue ID	Pg
RCCH30D3225	primary	EAT	Cutler-Hammer CH retrofit kit RCCH30D3225	EDH-EAT-00735	59
RCCH32BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RCCH32BXXX	EDH-EAT-00709	60
RCCH32D225	primary	EAT	Cutler-Hammer CH retrofit kit RCCH32D225	EDH-EAT-00720	60
RCCH42L225	primary	EAT	Cutler-Hammer CH retrofit kit RCCH42L225	EDH-EAT-00716	61
RCCH42L3225	primary	EAT	Cutler-Hammer CH retrofit kit RCCH42L3225	EDH-EAT-00731	61
RDBR30B3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RDBR30B3XXX	EDH-EAT-00752	62
RDBR30H3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RDBR30H3XXX	EDH-EAT-00753	62
RDBR40BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RDBR40BXXX	EDH-EAT-00743	63
RDBR42L225	primary	EAT	Cutler-Hammer BR retrofit kit RDBR42L225	EDH-EAT-00747	63
RDBR42L3225	primary	EAT	Cutler-Hammer BR retrofit kit RDBR42L3225	EDH-EAT-00760	64
RDCH42B200I	primary	EAT	Eaton CH retrofit stocking kit RDCH42B200I	EDH-EAT-01233	33
RDCH42B3XXX	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42B3XXX	EDH-EAT-00723	64
RDCH42BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42BXXX	EDH-EAT-00710	65
RDCH42D225	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42D225	EDH-EAT-00721	65
RDCH42D3225	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42D3225	EDH-EAT-00736	66
RDCH42H3XXX	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42H3XXX	EDH-EAT-00724	66
RDCH42HXXX	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42HXXX	EDH-EAT-00711	67
RDCH42L225	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42L225	EDH-EAT-00717	67
RDCH42L3225	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42L3225	EDH-EAT-00732	68
RDCHFRAME	primary	EAT	Eaton CH retrofit stocking kit RDCHFRAME	EDH-EAT-01234	36
REBR42B3XXX	primary	EAT	Cutler-Hammer BR retrofit kit REBR42B3XXX	EDH-EAT-00754	68
REBR42H3XXX	primary	EAT	Cutler-Hammer BR retrofit kit REBR42H3XXX	EDH-EAT-00755	69
REBR42L3225	primary	EAT	Cutler-Hammer BR retrofit kit REBR42L3225	EDH-EAT-00761	69
RGRPDPIN	primary	GEA	ReliaGear neXT replacement kit RGRPDPIN	EDH-GEA-01059	1163
RGRPIFRK	primary	GEA	ReliaGear neXT retrofit bracket kit RGRPIFRK (XT5/XT6/XT7)	EDH-GEA-01058	1162
RGRPTSCR	primary	GEA	ReliaGear neXT replacement kit RGRPTSCR	EDH-GEA-01060	1163
RP211002	primary	FPE	FPE handle extension for NM 800/1000 A breakers	EDH-FPE-00039	1870
RP212001	primary	FPE	FPE handle kit for NP frame	EDH-FPE-00040	1870
RPC2457	alias	EAT	PRL4 Type 3R enclosure 57 x 24 x 13.90 in	EDH-EAT-01118	487
RPC2473	alias	EAT	PRL4 Type 3R enclosure 73 x 24 x 13.90 in	EDH-EAT-01120	487
RPC2490	alias	EAT	PRL4 Type 3R enclosure 90 x 24 x 13.90 in	EDH-EAT-01122	487
RPC3673	alias	EAT	PRL4 Type 3R enclosure 73 x 36 x 13.90 in	EDH-EAT-01124	487
RPC3690	alias	EAT	PRL4 Type 3R enclosure 90 x 36 x 13.90 in	EDH-EAT-01126	488
RPCB2457	primary	EAT	PRL4 Type 3R enclosure 57 x 24 x 13.90 in	EDH-EAT-01118	487
RPCB2473	primary	EAT	PRL4 Type 3R enclosure 73 x 24 x 13.90 in	EDH-EAT-01120	487
RPCB2490	primary	EAT	PRL4 Type 3R enclosure 90 x 24 x 13.90 in	EDH-EAT-01122	487
RPCB3673	primary	EAT	PRL4 Type 3R enclosure 73 x 36 x 13.90 in	EDH-EAT-01124	487
RPCB3690	primary	EAT	PRL4 Type 3R enclosure 90 x 36 x 13.90 in	EDH-EAT-01126	488
RPINTBK1200HCPC	primary	SQD	I-Line mains/neutral compartment barrier kit, HCP 800/1200 A (crimp lugs)	EDH-SQD-00597	742
RPINTBK1200HCPCIP2X	primary	SQD	I-Line mains/neutral compartment barrier kit, HCP 800/1200 A (crimp lugs), IP2X	EDH-SQD-00598	742
RPINTBK1200HCR	primary	SQD	I-Line mains/neutral compartment barrier kit, HCR-U 1200 A	EDH-SQD-00599	742
RPINTBK800HCP	primary	SQD	I-Line mains/neutral compartment barrier kit, HCP 800 A (mechanical lugs)	EDH-SQD-00596	743
RS2641	primary	SIE	Siemens RS2641 rear-connecting stud, All ED, line side (long) 4.88 in	EDH-SIE-00301	1765
RS2642	primary	SIE	Siemens RS2642 rear-connecting stud, All ED, load side (long) 4.88 in	EDH-SIE-00302	1766
RS2643	primary	SIE	Siemens RS2643 rear-connecting stud, All ED, line side (short) 2.38 in	EDH-SIE-00299	1766
RS2644	primary	SIE	Siemens RS2644 rear-connecting stud, All ED, load side (short) 2.38 in	EDH-SIE-00300	1767

Number	Type	Mfr	Description	Catalogue ID	Pg
RS4755	primary	SIE	Siemens RS4755 rear-connecting stud, All FD, long (line or load) 7.06 in	EDH-SIE-00304	1771
RS4756	primary	SIE	Siemens RS4756 rear-connecting stud, All FD, short (line or load) 3.12 in	EDH-SIE-00303	1772
RS5773	primary	SIE	Siemens RS5773 rear-connecting stud, All JD, long 11.20 in	EDH-SIE-00306	1780
RS5774	primary	SIE	Siemens RS5774 rear-connecting stud, All JD, short 5.85 in	EDH-SIE-00305	1781
RS5783	primary	SIE	Siemens RS5783 rear-connecting stud, All LD, long 11.20 in	EDH-SIE-00308	1783
RS5784	primary	SIE	Siemens RS5784 rear-connecting stud, All LD, short 5.85 in	EDH-SIE-00307	1783
RS5785	primary	SIE	Siemens RS5785 rear-connecting stud, All MD, ND, long 8.00 in	EDH-SIE-00312	1800
RS5786	primary	SIE	Siemens RS5786 rear-connecting stud, All MD, ND, short 5.50 in	EDH-SIE-00311	1801
RS5787	primary	SIE	Siemens RS5787 rear-connecting stud, LM(X)D6, HLM(X)D6, long 11.20 in	EDH-SIE-00310	1786
RS5788	primary	SIE	Siemens RS5788 rear-connecting stud, LM(X)D6, HLM(X)D6, short 5.85 in	EDH-SIE-00309	1786
RTBR10B100Q	primary	EAT	Eaton BR retrofit stocking kit RTBR10B100Q	EDH-EAT-01236	34
RTBR12L125Q	primary	EAT	Eaton BR retrofit stocking kit RTBR12L125Q	EDH-EAT-01242	34
RTBR12L125R	primary	EAT	Eaton BR retrofit stocking kit RTBR12L125R	EDH-EAT-01235	35
RTLDLF	primary	SIE	VL DG rear terminal long, flat	EDH-SIE-00556	1830
RTLDLR	primary	SIE	VL DG rear terminal long, round	EDH-SIE-00557	1830
RTLDSF	primary	SIE	VL DG rear terminal short, flat	EDH-SIE-00554	1830
RTLDSR	primary	SIE	VL DG rear terminal short, round	EDH-SIE-00555	1830
RTLFLF	primary	SIE	VL FG rear terminal long, flat	EDH-SIE-00564	1831
RTLFLR	primary	SIE	VL FG rear terminal long, round	EDH-SIE-00565	1831
RTLFSF	primary	SIE	VL FG rear terminal short, flat	EDH-SIE-00562	1831
RTLFSR	primary	SIE	VL FG rear terminal short, round	EDH-SIE-00563	1831
RTLJLF	primary	SIE	VL JG rear terminal long, flat	EDH-SIE-00571	1831
RTLJSF	primary	SIE	VL JG rear terminal short, flat	EDH-SIE-00572	1832
RTLJSR	primary	SIE	VL JG rear terminal short, round	EDH-SIE-00570	1832
RTLLSF	primary	SIE	VL LG rear terminal short, flat	EDH-SIE-00576	1832
RTLNSF	primary	SIE	VL NG rear terminal short, flat	EDH-SIE-00581	1832
S01QR2	primary	SIE	Siemens QR shunt trip 120-240 Vac / 48 Vdc	EDH-SIE-00810	1694
S07QR2	primary	SIE	Siemens QR shunt trip 24 Vdc	EDH-SIE-00811	1694
S29348	alias	SQD	PowerPact L-frame / D-frame control tap takeoff (voltage takeoff)	EDH-SQD-00383	1046
S29370	primary	SQD	Square D removable padlock handle device, lock OFF only, PowerPact B/H/J/L	EDH-SQD-00963	888
S29371	primary	SQD	Square D fixed padlock attachment, PowerPact H/J, lock ON or OFF	EDH-SQD-00961	888
S32477	primary	SQD	PowerPact L-frame mixed rear connection kit	EDH-SQD-00439	1046
S32478	primary	SQD	PowerPact L-frame mixed rear connection kit	EDH-SQD-00440	1046
S32508	alias	SQD	PowerPact D-frame 400 A field-installable lug kit (with terminal cover)	EDH-SQD-00468	1020
S32510	alias	SQD	PowerPact D-frame 600 A field-installable lug kit (with terminal cover)	EDH-SQD-00469	1021
S32562	primary	SQD	PowerPact L-frame short terminal cover 3p	EDH-SQD-00443	1044
S32563	primary	SQD	PowerPact L-frame short terminal cover 4p	EDH-SQD-00444	1045
S33930	primary	SQD	I-Line sub-feed lug kit, 1200 A	EDH-SQD-00213	707
S33931	primary	SQD	I-Line sub-feed lug kit, 1200 A	EDH-SQD-00217	707
S36967	primary	SQD	PowerPact L/D-frame terminal screw set, M10 x 25 (4 pcs, one side)	EDH-SQD-00388	1045
S37422	primary	SQD	Square D fixed padlock attachment, PowerPact H/J, lock OFF only	EDH-SQD-00962	889
S37423	primary	SQD	PowerPact H-frame control wire terminal for mechanical lugs	EDH-SQD-00379	1026
S37424	primary	SQD	PowerPact J-frame control wire terminal for mechanical lugs	EDH-SQD-00380	1032

Number	Type	Mfr	Description	Catalogue ID	Pg
S37425	primary	SQD	PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection	EDH-SQD-00384	1027
S37426	primary	SQD	PowerPact H-frame terminal nut insert (M6) for bus bar connection	EDH-SQD-00385	1027
S37427	primary	SQD	PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection	EDH-SQD-00386	1032
S37428	primary	SQD	PowerPact J-frame terminal nut insert (M8) for bus bar connection	EDH-SQD-00387	1032
S37429	primary	SQD	PowerPact H-frame control wire terminal for terminal nut (busbar connection)	EDH-SQD-00381	1027
S37430	primary	SQD	PowerPact J-frame control wire terminal for terminal nut (busbar connection)	EDH-SQD-00382	1032
S37432	primary	SQD	PowerPact H-frame mixed rear connection kit	EDH-SQD-00431	1025
S37433	primary	SQD	PowerPact H-frame short rear connections (set of 2)	EDH-SQD-00432	1027
S37434	primary	SQD	PowerPact H-frame long rear connections (set of 2)	EDH-SQD-00433	1028
S37436	primary	SQD	PowerPact H-frame short terminal cover 3p	EDH-SQD-00434	1025
S37437	primary	SQD	PowerPact J-frame mixed rear connection kit	EDH-SQD-00435	1033
S37438	primary	SQD	PowerPact J-frame short rear connections (set of 2)	EDH-SQD-00436	1033
S37439	primary	SQD	PowerPact J-frame long rear connections (set of 2)	EDH-SQD-00437	1033
S37440	primary	SQD	PowerPact J-frame short terminal cover 3p	EDH-SQD-00438	1030
S37444	primary	SQD	Three-terminal (nut) kit for H-frame main breaker hard-bus connection	EDH-SQD-00121	875
S37445	primary	SQD	Three-terminal (nut) kit for J-frame main breaker hard-bus connection	EDH-SQD-00122	875
S37446	primary	SQD	PowerPact H-frame 60 A short lug shield	EDH-SQD-00445	1025
S37447	primary	SQD	PowerPact H-frame 150 A short lug shield	EDH-SQD-00446	1026
S37448	primary	SQD	PowerPact J-frame short lug shield	EDH-SQD-00447	1031
S37449	primary	SQD	PowerPact H-frame long lug shield	EDH-SQD-00448	1026
S37450	primary	SQD	PowerPact J-frame long lug shield	EDH-SQD-00449	1031
S3VA41T	primary	SIE	S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)	EDH-SIE-00125	1526
S3VA41TD	primary	SIE	S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)	EDH-SIE-00151	1527
S3VA41TDHD	primary	SIE	S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)	EDH-SIE-00152	1577
S3VA52PR	primary	SIE	3VA52/61/62 breaker provision hardware kit (twin mount)	EDH-SIE-00205	1560
S3VA52T	primary	SIE	S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00129	1527
S3VA52TD	primary	SIE	S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00156	1528
S3VA53PR	primary	SIE	3VA53/63/54/64 single-mount breaker provision hardware kit	EDH-SIE-00206	1732
S3VA53T	primary	SIE	S3VA53T connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00135	1529
S3VA53T2D	primary	SIE	S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)	EDH-SIE-00182	1578
S3VA53TD	primary	SIE	S3VA53TD connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00161	1530
S3VA54T	primary	SIE	S3VA54T connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00142	1531
S3VA54T2D	primary	SIE	S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)	EDH-SIE-00185	1579
S3VA54TD	primary	SIE	S3VA54TD connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00168	1531
S3VA55TD	primary	SIE	S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)	EDH-SIE-00186	1580
S3VA57TD	primary	SIE	S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)	EDH-SIE-00187	1580
S3VA63T	primary	SIE	S3VA63T connecting strap kit - 3VA63 (6.25in, single)	EDH-SIE-00136	1532
S3VA63TD	primary	SIE	S3VA63TD connecting strap kit - 3VA63 (6.25in, single)	EDH-SIE-00162	1581
S3VA64T	primary	SIE	S3VA64T connecting strap kit - 3VA64 (6.25in, single)	EDH-SIE-00143	1533
S3VA64TD	primary	SIE	S3VA64TD connecting strap kit - 3VA64 (6.25in, single)	EDH-SIE-00169	1582
S432475	primary	SQD	PowerPact L-frame short rear connections (set of 2)	EDH-SQD-00441	1047
S432476	primary	SQD	PowerPact L-frame long rear connections (set of 2)	EDH-SQD-00442	1047
S48899	primary	SQD	Square D maintenance compound S48899	EDH-SQD-00518	1000

Number	Type	Mfr	Description	Catalogue ID	Pg
SA1E025	primary	SIE	Siemens SA1E025 lug, ED 2/3-pole 15-25A	EDH-SIE-00257	1761
SA1-E025	alias	SIE	Siemens SA1E025 lug, ED 2/3-pole 15-25A	EDH-SIE-00257	1761
Same H scheme as 6554C01 (4X = H13, 5X = H14)	style_number	EAT	PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)	EDH-EAT-00295	476
SBD1	primary	GEA	GE handle locking device (non-padlocking) for SE150	EDH-GEA-00649	1355
SBL	primary	SIE	SBL connecting strap kit - BL, BQD (3.75in, twin)	EDH-SIE-00124	1533
SBLBD	primary	SIE	SBLBD connecting strap kit - BL, BQD (3.75in, twin)	EDH-SIE-00150	1534
SBMIQR	primary	SIE	Siemens QR handle sliding-bar interlock	EDH-SIE-00795	1695
SCE	primary	SIE	SCE connecting strap kit - CED (3.75in, twin)	EDH-SIE-00128	1535
SCED	primary	SIE	SCED connecting strap kit - CED (3.75in, twin)	EDH-SIE-00180	1582
SCF	primary	SIE	SCF connecting strap kit - Sentron CFD (5.00in, single)	EDH-SIE-00134	1536
SCFD	primary	SIE	SCFD connecting strap kit - Sentron CFD (5.00in, single)	EDH-SIE-00160	1583
SCJ	primary	SIE	SCJ connecting strap kit - Sentron CJD (8.75in, single)	EDH-SIE-00139	1536
SCJD	primary	SIE	SCJD connecting strap kit - Sentron CJD (8.75in, single)	EDH-SIE-00167	1583
SCL	primary	SIE	SCL connecting strap kit - Sentron CLD (8.75in, single)	EDH-SIE-00146	1537
SCLD	primary	SIE	SCLD connecting strap kit - Sentron CLD (8.75in, single)	EDH-SIE-00172	1584
SCPFP1	primary	GEA	SCP+ panelboard filler plate 1X	EDH-GEA-00276	1172
SCPFP2	primary	GEA	SCP+ panelboard filler plate 2X	EDH-GEA-00277	1172
SCPFP3	primary	GEA	SCP+ panelboard filler plate 3X	EDH-GEA-00278	1172
SCPFP5	primary	GEA	SCP+ panelboard filler plate 5X	EDH-GEA-00279	1172
SDG	primary	SIE	SB1/SB2/SB3 & P4/P5 branch mounting kit for Sentron VL DG frame breakers (shallo	EDH-SIE-00350	1730
SDGD	primary	SIE	SDGD connecting strap kit - VL DG (5.00in, twin)	EDH-SIE-00130	1538
SE3LCK	primary	GEA	GE SE3LCK lug cover kit, SE150 line end	EDH-GEA-00347	1438
SE3LCKL	primary	GEA	GE SE3LCKL lug cover kit, SE150 (modified for SEFR1 handle)	EDH-GEA-00348	1438
SE6	equivalent	OTH	Aftermarket bus connection kit BEDSITE (seller cross-ref to SIE SE6)	EDH-OTH-00061	1522
SE6	primary	SIE	SE6 connecting strap kit - ED (3.75in, twin)	EDH-SIE-00127	1539
SE6D	equivalent	OTH	Aftermarket bus connection kit BEDITE (seller cross-ref to SIE 6E62)	EDH-OTH-00054	1713
SE6D	primary	SIE	SE6D connecting strap kit - ED (3.75in, twin)	EDH-SIE-00154	1586
SEB	equivalent	OTH	Aftermarket bus connection kit BSEBP4 (seller cross-ref to SIE SEB)	EDH-OTH-00065	1523
SEB	primary	SIE	Switchboard/power panel branch kit for EB breakers, shallow (P4)	EDH-SIE-00348	1539
SEBD	primary	SIE	Switchboard/power panel branch kit for EB breakers, deep (P5 / switchboard)	EDH-SIE-00349	1540
SEBKP1P2P3V1	primary	SIE	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main	EDH-SIE-00231	1666
SEBKP2V1	primary	SIE	SEB kit, P2 BL/BQD horizontal main	EDH-SIE-00232	1493
SEBKP2V2	primary	SIE	SEB kit, P2 xGB horizontal main	EDH-SIE-00233	1493
SEBKP2V3	primary	SIE	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main	EDH-SIE-00234	1494
SEBKP2V4	primary	SIE	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main	EDH-SIE-00235	1494
SEBKP2V5	primary	SIE	SEB kit (P2, P2 w/SEM3) ED horizontal main	EDH-SIE-00236	1495
SEBKP2V6	primary	SIE	SEB kit (P2, P2 w/SEM3) ED vertical main	EDH-SIE-00237	1495
SEBKP2V7	primary	SIE	SEB kit, P2/P3 3VA52/61/62 horizontal main	EDH-SIE-00238	1496
SEBKP3V1	primary	SIE	Service entrance barrier kit CFD, FD (P3 only)	EDH-SIE-00239	1512
SEBKP3V3	primary	SIE	FD, QJ, QR horizontal main service entrance barrier (P2, P2 with SEM3, P3)	EDH-SIE-00408	1496
SEBKRP1V1	primary	SIE	SEB kit for RP1 with FD, QJ or QR horizontal main	EDH-SIE-00224	1667
SEBKRP1V2	primary	SIE	SEB kit for RP1 with ED horizontal main	EDH-SIE-00225	1667
SEBKRP1V3	primary	SIE	SEB kit for RP1 with back-fed BL/BQD main in unit space	EDH-SIE-00226	1668
SEBKRP1V4	primary	SIE	SEB kit for RP1 with back-fed xGB main in unit space	EDH-SIE-00227	1668

Number	Type	Mfr	Description	Catalogue ID	Pg
SEBKRP1V5	primary	SIE	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets	EDH-SIE-00228	1669
SEBKRP1V6	primary	SIE	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit	EDH-SIE-00229	1669
SEBKRP1V7	primary	SIE	SEB kit for RP1 with 3VA52/61/62 horizontal main	EDH-SIE-00230	1670
SEBP4V1	primary	SIE	Service entrance barrier for (S)JD, (S)LD, MG mains	EDH-SIE-00217	1556
SEBP4V2	primary	SIE	Service entrance barrier for CJD, CLD	EDH-SIE-00218	1556
SEBP4V3	primary	SIE	Service entrance barrier for JG, LG	EDH-SIE-00219	1556
SEBP5V1	primary	SIE	Service entrance barrier for (S)MD, (S)ND without shield	EDH-SIE-00220	1599
SEBP5V2	primary	SIE	Service entrance barrier for (S)MD, (S)ND with shield	EDH-SIE-00221	1600
SEBP5V3	primary	SIE	Service entrance barrier for Vacu-Break switches	EDH-SIE-00222	1600
SEBP5V4	primary	SIE	Service entrance barrier for HCP switches	EDH-SIE-00223	1600
SEBPPVA1	primary	SIE	Switchboard / P4 / P5 service entrance barrier kit - horizontal 3VA53/63/54/64	EDH-SIE-00375	1731
SEBPPVA2	primary	SIE	P5 service entrance barrier kit - horizontal 3VA55/3VA65/3VA66	EDH-SIE-00376	1601
SECT	primary	ZIN	Sylvania 225 A twin kit (for SC? frame, inferred)	EDH-ZIN-00018	1875
SED1K	alias	OTH	Aftermarket bus connection kit BAMCB6EBGE (seller cross-ref to GEA AMCB6EBFP)	EDH-OTH-00049	1247
SEFPLD2	primary	GEA	GE EUSERC-approved padlocking device for SE150, SF250	EDH-GEA-00640	1357
SEHT	primary	ZIN	Sylvania 100 A twin kit (for SE/SEH breakers, inferred)	EDH-ZIN-00017	1876
SEMSK1	primary	GEA	GE breaker mounting screw kit SEMSK1 (SE150, tapped holes)	EDH-GEA-00697	1451
SEMSK2	primary	GEA	GE breaker mounting screw kit SEMSK2 (SE150, clearance holes)	EDH-GEA-00702	1452
SEMSK3	primary	GEA	GE breaker mounting screw kit SEMSK3 (SE150, tapped holes)	EDH-GEA-00698	1452
SEMSK4	primary	GEA	GE breaker mounting screw kit SEMSK4 (SE150, clearance holes)	EDH-GEA-00703	1452
SEPLD	primary	GEA	GE standard padlocking device for SE150, SF250	EDH-GEA-00634	1357
SEY1K	alias	OTH	Aftermarket bus connection kit BAMCB6EYGE (seller cross-ref to GEA AMCB6EYFP)	EDH-OTH-00050	1247
SF-100LP	primary	SQD	Square D 100 A sub-feed lug kit for NQO and NQOB panelboards	EDH-SQD-00520	900
SF-225LP	primary	SQD	Square D 225 A sub-feed lug kit for NQO, NQOB and NY1B panelboards	EDH-SQD-00521	900
SF2DPK	primary	GEA	CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)	EDH-GEA-00262	1115
SF2DPK1,2	alias	GEA	CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)	EDH-GEA-00262	1115
SF3LCK	primary	GEA	GE SF3LCK lug cover kit, SF250 line end	EDH-GEA-00349	1441
SF6	equivalent	OTH	Aftermarket bus connection kit BFDSITE (seller cross-ref to SIE SF6)	EDH-OTH-00063	1522
SF6	primary	SIE	SF6 connecting strap kit - Sentron FD (5.00in, twin)	EDH-SIE-00133	1540
SF6D	equivalent	OTH	Aftermarket bus connection kit BFDITE (seller cross-ref to SIE 6F62)	EDH-OTH-00056	1714
SF6D	primary	SIE	SF6D connecting strap kit - Sentron FD (5.00in, twin)	EDH-SIE-00159	1586
SFCARE	primary	GEA	GE SFCARE additional insulators for SF2DPK on existing CCB hardware	EDH-GEA-00960	1127
SFD1K	alias	OTH	Aftermarket bus connection kit BAMCB6FJGE (seller cross-ref to GEA AMCB6FJFP)	EDH-OTH-00052	1247
SFG	primary	SIE	SFG connecting strap kit - VL FG (5.00in, twin)	EDH-SIE-00132	1541
SFGD	primary	SIE	SFGD connecting strap kit - VL FG (5.00in, twin)	EDH-SIE-00158	1542
SFGMSK1	primary	GEA	GE breaker mounting screw kit SFGMSK1 (SF250 and SG600, tapped holes)	EDH-GEA-00699	1453
SFGMSK2	primary	GEA	GE breaker mounting screw kit SFGMSK2 (SF250 and SG600, clearance holes)	EDH-GEA-00704	1454

Number	Type	Mfr	Description	Catalogue ID	Pg
SFMSK1	primary	GEA	GE breaker mounting screw kit SFMSK1 (SF250, tapped holes)	EDH-GEA-00700	1454
SFMSK2	primary	GEA	GE breaker mounting screw kit SFMSK2 (SF250, clearance holes)	EDH-GEA-00705	1454
SFS1K	alias	OTH	Aftermarket bus connection kit BAMCB3FJGE (seller cross-ref to GEA AMCB3FJFP)	EDH-OTH-00046	1246
SG1BCK	primary	GEA	GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)	EDH-GEA-00351	1444
SG1BCK4 (as printed 2019)	alias	GEA	GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)	EDH-GEA-00351	1444
SG1LCK	primary	GEA	GE SG1LCK 3-pole lug cover, SG600	EDH-GEA-00350	1445
SG6DPK	primary	GEA	GE SG-frame twin mounting kit, 600 A (dealer label 'AV')	EDH-GEA-00604	1116
SG6DPK	equivalent	OTH	Aftermarket bus connection kit BSGDGE (seller cross-ref to GEA SG6DPK)	EDH-OTH-00043	1112
SG6SPK	primary	GEA	GE SG-frame single mounting kit, 600 A (dealer label 'AV')	EDH-GEA-00605	1372
SGB2	primary	SIE	SGB2 connecting strap kit - xGB2 (3.75in, twin)	EDH-SIE-00126	1543
SGB2D	primary	SIE	SGB2D connecting strap kit - xGB2 (3.75in, twin)	EDH-SIE-00153	1543
SGBCS1	primary	GEA	GE SGBCS1 back-connected line/load stud, SG600, 2 13/16 in (short)	EDH-GEA-00392	1445
SGBCS2	primary	GEA	GE SGBCS2 back-connected line/load stud, SG600, 6 1/16 in (long)	EDH-GEA-00393	1445
SGD1K	alias	OTH	Aftermarket bus connection kit BAMCB6GBGE (seller cross-ref to GEA AMCB6GBFP)	EDH-OTH-00053	1248
SGD6K	alias	OTH	Aftermarket bus connection kit BSGDGE (seller cross-ref to GEA SG6DPK)	EDH-OTH-00043	1112
SGLVK	primary	GEA	GE SGLVK line voltage control wire kit, SG600	EDH-GEA-00362	1446
SGMSKMOM	primary	GEA	GE mounting screw kit SGMSKMOM for motor-operated mechanism / plug-in base (SG60	EDH-GEA-00723	1457
SGPC1	primary	GEA	GE plug-in mounting base SGPC1 (SG400 3-pole, vertical studs only (SLS))	EDH-GEA-00768	1455
SGPC2	primary	GEA	GE plug-in mounting base SGPC2 (SG400 3-pole, vertical studs only (LSL))	EDH-GEA-00769	1455
SGPC7	primary	GEA	GE plug-in mounting base SGPC7 (SG600 3-pole, vertical studs only (SLS/LSL))	EDH-GEA-00770	1456
SGPLD	primary	GEA	GE standard padlocking device for SG600	EDH-GEA-00635	1357
SGPLD2	primary	GEA	GE EUSERC-approved padlocking device for SG600	EDH-GEA-00641	1357
SGS1K	alias	OTH	Aftermarket bus connection kit BAMCB3GMGE (seller cross-ref to GEA AMCB3GMFP)	EDH-OTH-00047	1246
SGS6K	primary	GEA	SG-frame single mounting kit, 600 A (dealer label 'AV'; possibly aftermarket)	EDH-GEA-00606	1372
SJ1	equivalent	OTH	Aftermarket bus connection kit BJDSITE (seller cross-ref to SIE SJ1)	EDH-OTH-00064	1522
SJ1	primary	SIE	SJ1 connecting strap kit - Sentron JD (8.75in, single)	EDH-SIE-00138	1544
SJ1D	equivalent	OTH	Aftermarket bus connection kit BJDSGLITE (seller cross-ref to SIE 6JJ61)	EDH-OTH-00057	1715
SJ1D	primary	SIE	SJ1D connecting strap kit - Sentron JD (8.75in, single)	EDH-SIE-00165	1587
SJ2D	equivalent	OTH	Aftermarket bus connection kit BJDITE (seller cross-ref to SIE 6JJ62)	EDH-OTH-00058	1714
SJ2D	primary	SIE	SJ2D connecting strap kit - Sentron JD (8.75in, twin)	EDH-SIE-00166	1588
SJD4T	primary	ZIN	Sylvania 400 A twin kit (SJD frame)	EDH-ZIN-00019	1876
SJG	primary	SIE	SJG connecting strap kit - VL JG (6.25in, single)	EDH-SIE-00137	1545
SJG1D	primary	SIE	SJG1D connecting strap kit - VL JG (6.25in, single)	EDH-SIE-00164	1545
SJG2D	primary	SIE	SJG2D connecting strap kit - VL JG (6.25in, twin)	EDH-SIE-00163	1589
SK12SPK	primary	GEA	CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)	EDH-GEA-00266	1116
SK12SPK3	alias	GEA	CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)	EDH-GEA-00266	1116
SK1LCK	primary	GEA	GE SK1LCK lug cover, SK1200	EDH-GEA-00352	1449

Number	Type	Mfr	Description	Catalogue ID	Pg
SK1LCK3 (as printed 2019)	alias	GEA	GE SK1LCK lug cover, SK1200	EDH-GEA-00352	1449
SK4515	equivalent	OTH	Aftermarket bus connection kit BSK4515 (seller cross-ref to SQD SK4515)	EDH-OTH-00068	784
SK4515	primary	SQD	Square D adapter kit for FAL breaker in obsolete MLN panelboard	EDH-SQD-00529	786
SK4516	equivalent	OTH	Aftermarket bus connection kit BSK4516 (seller cross-ref to SQD SK4516)	EDH-OTH-00069	785
SK4516	primary	SQD	Square D adapter kit for KAL breaker in obsolete MLN panelboard	EDH-SQD-00530	786
SK4517	equivalent	OTH	Aftermarket bus connection kit BSK4517 (seller cross-ref to SQD SK4517)	EDH-OTH-00070	785
SK4517	primary	SQD	Square D adapter kit for LAL breaker in obsolete MLN panelboard	EDH-SQD-00531	786
SK4529	primary	SQD	Square D NY1B mounting kit (discontinued)	EDH-SQD-00528	788
SK4578	equivalent	OTH	Aftermarket bus connection kit BSK4578 (seller cross-ref to SQD SK4578)	EDH-OTH-00071	785
SK4578	primary	SQD	Square D adapter kit for MAL breaker in obsolete MLN panelboard	EDH-SQD-00532	786
SK-5666	primary	SQD	Square D Q1B panelboard mounting kit for NQOB	EDH-SQD-00522	901
SK5668	primary	SQD	Square D branch connector kit for NQOB panelboards	EDH-SQD-00523	900
SK5669	primary	SQD	Square D mounting assembly for QO2125 in NQO interior (not for NQOB)	EDH-SQD-00524	901
SK8SPK	primary	GEA	CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)	EDH-GEA-00265	1116
SK8SPK3	alias	GEA	CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)	EDH-GEA-00265	1116
SKHDLEXT	primary	GEA	GE replacement handle extension for SK1200	EDH-GEA-00650	1354
SKLVK	primary	GEA	GE SKLVK line voltage control wire kit, K1200/SK1200	EDH-GEA-00333	1423
SKLVK6 / SKLVK8 (as printed)	alias	GEA	GE SKLVK line voltage control wire kit, K1200/SK1200	EDH-GEA-00333	1423
SKM8S	primary	ZIN	Sylvania 800 A single kit (SKM frame)	EDH-ZIN-00020	1876
SKMSK1	primary	GEA	GE breaker mounting screw kit SKMSK1 (SK1200, tapped holes)	EDH-GEA-00701	1462
SKMSK2	primary	GEA	GE breaker mounting screw kit SKMSK2 (SK1200, clearance holes)	EDH-GEA-00706	1463
SKNF250	primary	SQD	NF branch connector kit, 125/250 A interiors	EDH-SQD-00104	804
SKNF600	primary	SQD	NF branch connector kit, 400-800 A interiors	EDH-SQD-00105	805
SKNQBC	primary	SQD	NQ branch connector replacement kit	EDH-SQD-00042	838
SKNQOD225	primary	SQD	NQOD branch connector kit, 225 A max, 3-phase	EDH-SQD-00043	906
SKPLD	primary	GEA	GE standard padlocking device for SK1200	EDH-GEA-00636	1358
SKPLD2	primary	GEA	GE EUSERC-approved padlocking device for SK1200	EDH-GEA-00643	1358
SKPSHLD	primary	GEA	GE SKPSHLD lug cover/arc shield, SKPA upper end	EDH-GEA-00353	1449
SKS1K	alias	OTH	Aftermarket bus connection kit BAMCB35KMGE (seller cross-ref to GEA AMCB3KMFP)	EDH-OTH-00048	1246
SL100	primary	SQD	I-Line sub-feed lug kit, 100 A	EDH-SQD-00218	708
SL-100	alias	SQD	I-Line sub-feed lug kit, 100 A	EDH-SQD-00218	708
SL1200	primary	SQD	I-Line plug-on sub-feed lug SL1200	EDH-SQD-00514	708
SL1200P5	primary	SQD	I-Line sub-feed lug kit, 1200 A	EDH-SQD-00214	709
SL1200P6	primary	SQD	I-Line sub-feed lug kit, 1200 A	EDH-SQD-00215	709
SL1200P7	primary	SQD	I-Line sub-feed lug kit, 1200 A	EDH-SQD-00216	710
SL-225	primary	SQD	Square D I-Line sub-feed lugs 225 A	EDH-SQD-00563	710
SL-225	alias	SQD	Square D I-Line sub-feed lugs 225 A	EDH-SQD-00563	710
SL250	primary	SQD	I-Line sub-feed lug kit, 250 A	EDH-SQD-00210	711
SL400	primary	SQD	I-Line sub-feed lug kit, 400 A	EDH-SQD-00211	711
SL-400	alias	SQD	I-Line sub-feed lug kit, 400 A	EDH-SQD-00211	711
SL6	primary	SIE	SL6 connecting strap kit - Sentron LD (8.75in, single)	EDH-SIE-00145	1546

Number	Type	Mfr	Description	Catalogue ID	Pg
SL6D	equivalent	OTH	Aftermarket bus connection kit BLDITE (seller cross-ref to SIE 6LL61)	EDH-OTH-00059	1716
SL6D	primary	SIE	SL6D connecting strap kit - Sentron LD (8.75in, single)	EDH-SIE-00171	1590
SL800	primary	SQD	I-Line plug-on sub-feed lug kit SL800	EDH-SQD-00358	712
SL-800	alias	SQD	I-Line plug-on sub-feed lug kit SL800	EDH-SQD-00358	712
SL800FT	primary	SQD	I-Line plug-on sub-feed lug SL800FT	EDH-SQD-00513	712
SL800M5	primary	SQD	I-Line sub-feed lug kit, 800 A	EDH-SQD-00212	713
SLG	primary	SIE	SLG connecting strap kit - VL LG (6.25in, single)	EDH-SIE-00144	1547
SLGD	primary	SIE	SLGD connecting strap kit - VL LG (6.25in, single)	EDH-SIE-00170	1548
SLM1	primary	SIE	Switchboard/power panel branch kit SLM1 for Sentron LMD / VL MG frame breakers	EDH-SIE-00351	1730
SLM1D	primary	SIE	SLM1D connecting strap kit - Sentron LMD (8.75in, single)	EDH-SIE-00176	1549
SMB6R	primary	SIE	Siemens BQ mounting bracket 1P/2P/3P	EDH-SIE-00771	1685
SMBKED1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph	EDH-SIE-00056	1706
SMBKED3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph	EDH-SIE-00057	1706
SMBKFD1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph	EDH-SIE-00058	1706
SMBKFD3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph	EDH-SIE-00059	1707
SMBKJD1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph	EDH-SIE-00060	1707
SMBKJD3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph	EDH-SIE-00061	1707
SMBKL6	primary	SIE	P4/P5 main breaker kit for Sentron JD / LD frame (shallow P4)	EDH-SIE-00356	1517
SMBKL6D	primary	SIE	P4/P5 main breaker kit for Sentron JD / LD frame (deep P5)	EDH-SIE-00357	1517
SMBKLG	primary	SIE	P4/P5 main breaker kit for Sentron VL JG / LG frame (shallow P4)	EDH-SIE-00358	1518
SMBKLG1D	primary	SIE	P4/P5 main breaker kit for Sentron VL JG / LG frame (deep P5)	EDH-SIE-00359	1518
SMBKMG	primary	SIE	P4/P5 main breaker kit for Sentron VL MG frame (shallow P4)	EDH-SIE-00360	1518
SMBKMG1D	primary	SIE	P4/P5 main breaker kit for Sentron VL MG frame (deep P5)	EDH-SIE-00361	1518
SMLK12	primary	SIE	P4/P5 400-1200 A main lug kit	EDH-SIE-00362	1519
SMMBQMK	primary	SIE	SMM/SMD metering switchboard connecting kit for BQ disconnect	EDH-SIE-00711	1734
SMMCEMK	primary	SIE	SMM/SMD metering switchboard connecting kit for CED disconnect	EDH-SIE-00715	1734
SMMEDMK	primary	SIE	SMM/SMD metering switchboard connecting kit for ED disconnect	EDH-SIE-00713	1734
SMMFDMK	primary	SIE	SMM/SMD metering switchboard connecting kit for FD disconnect	EDH-SIE-00714	1734
SMMHEMK	primary	SIE	SMM/SMD metering switchboard connecting kit for EG disconnect	EDH-SIE-00710	1734
SMMNGMK	primary	SIE	SMM/SMD metering switchboard connecting kit for NGG disconnect	EDH-SIE-00709	1735
SMMQJMK	primary	SIE	SMM/SMD metering switchboard connecting kit for QJ disconnect	EDH-SIE-00712	1735
SMMTFMK	primary	SIE	SMM/SMD metering switchboard connecting kit for T-Fuse Pullout disconnect	EDH-SIE-00716	1735
SMND	equivalent	OTH	Aftermarket bus connection kit BMDITE (seller cross-ref to SIE SMND)	EDH-OTH-00060	1716
SMND	primary	SIE	SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)	EDH-SIE-00177	1591
SMP3	primary	GEA	GE optional plug-in mounting plate SMP3 (SG400/SG600 plug-in bases)	EDH-GEA-00775	1456
SMSKHCP	primary	SIE	P5 power panel main mounting kit for Sentron HCP switch	EDH-SIE-00468	1562
SMSKHCPP	alias	SIE	P5 power panel main mounting kit for Sentron HCP switch	EDH-SIE-00468	1562

Number	Type	Mfr	Description	Catalogue ID	Pg
SNB	primary	SIE	Switchboard/P4/P5 branch kit for GB breakers (shallow)	EDH-SIE-00352	1730
SNBD	primary	SIE	Switchboard/P4/P5 branch kit for GB breakers (deep)	EDH-SIE-00353	1550
SNT1LP03K	primary	EAT	Eaton F-frame shunt trip field kit, 12-24 Vac or dc, left-pole, pigtail	EDH-EAT-01312	375
SNT1LP08K	primary	EAT	Eaton F-frame shunt trip field kit, 48-127 Vac or 48-60 Vdc, left-pole, pigtail	EDH-EAT-01313	376
SNT1LP12K	primary	EAT	Eaton F-frame shunt trip field kit, 208-380 Vac or 110-127 Vdc, left-pole, pigta	EDH-EAT-01314	376
SNT1LP18K	primary	EAT	Eaton F-frame shunt trip field kit, 415-600 Vac or 220-250 Vdc, left-pole, pigta	EDH-EAT-01315	376
SNT1RP03K	primary	EAT	Eaton F-frame shunt trip field kit, 12-24 Vac or dc, right/neutral-pole, pigtail	EDH-EAT-01316	377
SNT1RP08K	primary	EAT	Eaton F-frame shunt trip field kit, 48-127 Vac or 48-60 Vdc, right/neutral-pole,	EDH-EAT-01317	377
SNT1RP12K	primary	EAT	Eaton F-frame shunt trip field kit, 208-380 Vac or 110-127 Vdc, right/neutral-po	EDH-EAT-01318	377
SNT1RP18K	primary	EAT	Eaton F-frame shunt trip field kit, 415-600 Vac or 220-250 Vdc, right/neutral-po	EDH-EAT-01319	378
SPD050208Y2A	primary	EAT	Eaton integrated panelboard SPD SPD050208Y2A	EDH-EAT-01225	292
SPD050230L2A	primary	EAT	Eaton integrated panelboard SPD SPD050230L2A	EDH-EAT-01220	292
SPD100208Y2A	primary	EAT	Eaton integrated panelboard SPD SPD100208Y2A	EDH-EAT-01226	293
SPD100480Y2A	primary	EAT	Eaton integrated panelboard SPD SPD100480Y2A	EDH-EAT-01224	293
SPD120230L3A	primary	EAT	Eaton integrated panelboard SPD SPD120230L3A	EDH-EAT-01221	294
SPD120480Y2C	primary	EAT	Eaton integrated panelboard SPD SPD120480Y2C	EDH-EAT-01227	294
SPD160480Y3A	primary	EAT	Eaton integrated panelboard SPD SPD160480Y3A	EDH-EAT-01222	295
SPD200480Y3A	primary	EAT	Eaton integrated panelboard SPD SPD200480Y3A	EDH-EAT-01223	295
SPDkkkVVVVfA	primary	EAT	Eaton SPD Series integrated panelboard SPD, direct bus mounted (application code	EDH-EAT-01219	296
SQD1K	alias	OTH	Aftermarket bus connection kit BAMCB6QDGE (seller cross-ref to GEA AMCB6QDFP)	EDH-OTH-00051	1248
SQJ	equivalent	OTH	Aftermarket bus connection kit BQJSITE (seller cross-ref to SIE SQJ)	EDH-OTH-00062	1523
SQJ	primary	SIE	QJ breaker branch mounting kit (shallow panelboards (shallow kit reference shown	EDH-SIE-00470	1551
SQJD	equivalent	OTH	Aftermarket bus connection kit BQJITE (seller cross-ref to SIE 6QJ2)	EDH-OTH-00055	1717
SQJD	primary	SIE	QJ breaker branch mounting kit (switchboards or deep panelboards)	EDH-SIE-00469	1593
SQR	primary	SIE	SQR connecting strap kit - QR (5.00in, twin)	EDH-SIE-00131	1551
SQRC	primary	SIE	QR cover plate for P4/P5/SPP power panels	EDH-SIE-00210	1561
SQRD	primary	SIE	SQRD connecting strap kit - QR (5.00in, twin)	EDH-SIE-00181	1552
SR1XBF	primary	GEA	ReliaGear neXT XT1 mounting bracket SR1XBF	EDH-GEA-00564	1162
SR2XBF	primary	GEA	ReliaGear neXT XT1 mounting bracket SR2XBF	EDH-GEA-00565	1162
SR5XBF	primary	GEA	ReliaGear neXT XT1 mounting bracket SR5XBF	EDH-GEA-00566	1163
SRFB3XT4FPK	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPK	EDH-GEA-00552	1347
SRFB3XT4FPX	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPX	EDH-GEA-00551	1348
SRFB3XT5MFPK	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPK	EDH-GEA-00556	1348
SRFB3XT5MFPX	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPX	EDH-GEA-00555	1349
SRFB3XT7MFPK	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPK	EDH-GEA-00558	1349
SRFB3XT7MFPX	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPX	EDH-GEA-00557	1350
SRFB6XT1FPK	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPK	EDH-GEA-00548	1350
SRFB6XT1FPX	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPX	EDH-GEA-00547	1351
SRFB6XT4FPK	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPK	EDH-GEA-00550	1351
SRFB6XT4FPX	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPX	EDH-GEA-00549	1352
SRFB6XT5BFPK	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPK	EDH-GEA-00554	1352
SRFB6XT5BFPX	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPX	EDH-GEA-00553	1353

Number	Type	Mfr	Description	Catalogue ID	Pg
SRFN100GF	primary	GEA	Spectra retrofit neutral CT kit SRFN100GF	EDH-GEA-00562	1354
SRFN120GF	primary	GEA	Spectra retrofit neutral CT kit SRFN120GF	EDH-GEA-00563	1354
SRFN400GF	primary	GEA	Spectra retrofit neutral CT kit SRFN400GF	EDH-GEA-00559	1355
SRFN600GF	primary	GEA	Spectra retrofit neutral CT kit SRFN600GF	EDH-GEA-00560	1355
SRFN800GF	primary	GEA	Spectra retrofit neutral CT kit SRFN800GF	EDH-GEA-00561	1355
SRTDF3	primary	SIE	VL DG rear stud flat, 3-pole set	EDH-SIE-00560	1832
SRTDF4	primary	SIE	VL DG rear stud flat, 4-pole set	EDH-SIE-00561	1833
SRTDR3	primary	SIE	VL DG rear stud round, 3-pole set	EDH-SIE-00558	1833
SRTDR4	primary	SIE	VL DG rear stud round, 4-pole set	EDH-SIE-00559	1833
SRTFF3	primary	SIE	VL FG rear stud flat, 3-pole set	EDH-SIE-00568	1833
SRTFF4	primary	SIE	VL FG rear stud flat, 4-pole set	EDH-SIE-00569	1833
SRTFR3	primary	SIE	VL FG rear stud round, 3-pole set	EDH-SIE-00566	1834
SRTFR4	primary	SIE	VL FG rear stud round, 4-pole set	EDH-SIE-00567	1834
SRTJF4	primary	SIE	VL JG rear stud flat, 4-pole set	EDH-SIE-00573	1834
SRTJR3	primary	SIE	VL JG rear stud round, 3-pole set	EDH-SIE-00574	1834
SRTJR4	primary	SIE	VL JG rear stud round, 4-pole set	EDH-SIE-00575	1834
SRTLF3	primary	SIE	VL LG rear stud flat, 3-pole set	EDH-SIE-00577	1835
SRTLF4	primary	SIE	VL LG rear stud flat, 4-pole set	EDH-SIE-00578	1835
SRTMF3	primary	SIE	VL MG rear stud flat, 3-pole set	EDH-SIE-00579	1835
SRTMF4	primary	SIE	VL MG rear stud flat, 4-pole set	EDH-SIE-00580	1835
SRTNF3	primary	SIE	VL NG rear stud flat, 3-pole set	EDH-SIE-00582	1835
SRTNF4	primary	SIE	VL NG rear stud flat, 4-pole set	EDH-SIE-00583	1836
SSCJ	primary	SIE	SSCJ connecting strap kit - Sentron SCJD (8.75in, single)	EDH-SIE-00141	1552
SSCJD	primary	SIE	SSCJD connecting strap kit - SCJD (8.75in, single)	EDH-SIE-00184	1593
SSCL	primary	SIE	SSCL connecting strap kit - Sentron SCLD (8.75in, single)	EDH-SIE-00148	1553
SSCLD	primary	SIE	SSCLD connecting strap kit - Sentron SCLD (8.75in, single)	EDH-SIE-00174	1594
SSJ1	primary	SIE	SSJ1 connecting strap kit - Sentron SJD (8.75in, single)	EDH-SIE-00140	1554
SSJ1D	primary	SIE	SSJ1D connecting strap kit - SJD (8.75in, single)	EDH-SIE-00183	1595
SSL6	primary	SIE	SSL6 connecting strap kit - Sentron SLD (8.75in, single)	EDH-SIE-00147	1555
SSL6D	primary	SIE	SSL6D connecting strap kit - Sentron SLD (8.75in, single)	EDH-SIE-00173	1596
SSMND	primary	SIE	SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)	EDH-SIE-00178	1597
SSP01SBA08D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 120/240 V, 80 kA (NQ)	EDH-SQD-00619	877
SSP01SBA10D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 120/240 V, 100 kA (NQ)	EDH-SQD-00620	877
SSP01SBA12D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 120/240 V, 120 kA (NQ)	EDH-SQD-00621	877
SSP01SBA16D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 120/240 V, 160 kA (NQ)	EDH-SQD-00622	878
SSP01SBA20D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 120/240 V, 200 kA (NQ)	EDH-SQD-00623	878
SSP01SBA24D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 120/240 V, 240 kA (NQ)	EDH-SQD-00624	878
SSP02SBA08D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 80 kA (NQ)	EDH-SQD-00625	879
SSP02SBA10D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 100 kA (NQ)	EDH-SQD-00626	879
SSP02SBA12D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 120 kA (NQ)	EDH-SQD-00627	879
SSP02SBA16D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 160 kA (NQ)	EDH-SQD-00628	880
SSP02SBA20D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 200 kA (NQ)	EDH-SQD-00629	880
SSP02SBA24D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 208Y/120 V, 240 kA (NQ)	EDH-SQD-00630	880
SSP03SBA24D	primary	SQD	Surgelogic SurgeLoc plug-on SPD, 240/120 V high-leg delta, 240 kA (NQ)	EDH-SQD-00631	881
SSRK35	primary	SIE	Vacu-Break switch fuse clip adapter kit	EDH-SIE-00741	1747
SSRK36	primary	SIE	Vacu-Break switch fuse clip adapter kit	EDH-SIE-00742	1747
STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	style_number	EAT	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	EDH-EAT-00222	240
STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	style_number	EAT	PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 i	EDH-EAT-00233	237

Number	Type	Mfr	Description	Catalogue ID	Pg
STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	style_number	EAT	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00226	241
STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2	style_number	EAT	PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing	EDH-EAT-00231	239
STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	style_number	EAT	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A	EDH-EAT-00230	241
STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00227	238
STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	style_number	EAT	PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 i	EDH-EAT-00234	240
STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 d	EDH-EAT-00223	237
STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	style_number	EAT	PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (3	EDH-EAT-00221	237
STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% ne	EDH-EAT-00225	238
STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mech	EDH-EAT-00232	240
STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	style_number	EAT	PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical	EDH-EAT-00224	238
STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mech	EDH-EAT-00228	239
SWLUB	primary	SQD	Square D maintenance compound SWLUB	EDH-SQD-00517	1000
T1000NB1	primary	EAT	Series C N-frame line/load terminal, 1000 A, Cu	EDH-EAT-00527	643
T1200NB3	primary	EAT	Series C N-frame line/load terminal, 1200 A, Cu	EDH-EAT-00528	644
T1200NB3M	primary	EAT	Series G NG-frame line/load terminal, 1250 A, Cu (metric)	EDH-EAT-00529	700
T1600RD	primary	EAT	Series C R-frame line/load terminal, 1600 A, Cu	EDH-EAT-00531	655
T250FJ	primary	EAT	Series G JG-frame line/load terminal, 250 A, Cu (standard)	EDH-EAT-00541	674
T250KB	primary	EAT	Series C J-frame line/load terminal, 250 A, Cu only (optional)	EDH-EAT-00471	560
T300K	primary	EAT	Series C K-frame line/load terminal , 225 A, Cu	EDH-EAT-00477	591
T350K	primary	EAT	Series C K-frame line/load terminal , 350 A, Cu	EDH-EAT-00478	592
T350LK	primary	EAT	Series G LG-frame line/load terminal, 400 A, Cu	EDH-EAT-00552	691
T600MA1	primary	EAT	Series C M-frame line/load terminal, 600 A, Cu	EDH-EAT-00517	629
T602LD	primary	EAT	Series C L-frame line/load terminal, 600 A, Cu	EDH-EAT-00508	615
T602LDCW	primary	EAT	Series C L-frame terminal with control wire termination (T602LD)	EDH-EAT-00513	616
T700NB1	primary	EAT	Series C N-frame line/load terminal, 700 A, Cu	EDH-EAT-00526	645
T800MA1	primary	EAT	Series C M-frame line/load terminal, 800 A, Cu	EDH-EAT-00518	629
TA1000NB1	primary	EAT	Series C N-frame line/load terminal, 1000 A, Cu/Al	EDH-EAT-00523	645
TA1200NB1	primary	EAT	Series C N-frame line/load terminal, 1200 A, Cu/Al	EDH-EAT-00524	646
TA1201NB1	primary	EAT	Series C N-frame line/load terminal, 1200 A, Cu/Al	EDH-EAT-00525	647
TA12JG04	primary	SIE	VL JG power distribution connector 12-wire, single	EDH-SIE-00601	1814
TA1600RD	primary	EAT	Series C R-frame line/load terminal, 1600 A, Cu/Al	EDH-EAT-00530	656

Number	Type	Mfr	Description	Catalogue ID	Pg
TA1DG30	primary	SIE	VL DG Al/Cu lug (single)	EDH-SIE-00606	1814
TA1E6125	primary	SIE	Siemens TA1E6125 lug, ED 110-125A	EDH-SIE-00259	1761
TA1FD350A	primary	SIE	Siemens TA1FD350A lug, FD 70-250A	EDH-SIE-00265	1768
TA1L6750	primary	SIE	Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil	EDH-SIE-00273	1775
TA1-L6750	alias	SIE	Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil	EDH-SIE-00273	1775
TA1Q1	primary	SIE	Siemens TA1Q1 line-side lug, BQ 45-125A	EDH-SIE-00247	1749
TA1Q300	primary	SIE	Siemens TA1Q300 3-lug kit, QJ2 (distributor data)	EDH-SIE-00256	1755
TA1QR300	primary	SIE	QR frame wire connector (single, Cu/Al)	EDH-SIE-00525	1757
TA2000RD	primary	EAT	Series C R-frame line/load terminal, 2000 A, Cu/Al	EDH-EAT-00532	657
TA250FJ	primary	EAT	Series G JG-frame line/load terminal, 250 A, Cu/Al	EDH-EAT-00542	674
TA250KB	primary	EAT	Series C J-frame line/load terminal, 250 A, Cu/Al (standard)	EDH-EAT-00470	561
TA2J630	primary	SIE	Siemens TA2J630 lug, SJD6-B 65-200A	EDH-SIE-00270	1775
TA2J6500	primary	SIE	Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil	EDH-SIE-00269	1776
TA2-J6500	alias	SIE	Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil	EDH-SIE-00269	1776
TA2J6500T10	primary	SIE	JD/LD frame 2-cavity 500 kcmil connector with #10-32 sensing tap	EDH-SIE-00486	1773
TA2-J6500T10	alias	SIE	JD/LD frame 2-cavity 500 kcmil connector with #10-32 sensing tap	EDH-SIE-00486	1773
TA2K500	primary	SIE	Siemens TA2K500 lug, LMD/MD 500-600A, 1-2 x #1-500	EDH-SIE-00277	1784
TA2K8750	primary	SIE	MD/ND frame multi-cable pressure connector (2) 500-750 kcmil Cu/Al	EDH-SIE-00502	1793
TA2N750	primary	SIE	Siemens TA2N750 lug, MD 500-800A (100% rated), 500-750 kcmil	EDH-SIE-00280	1796
TA2N8750	primary	SIE	MD/ND frame multi-cable pressure connector (2) 500-750 kcmil Cu/Al	EDH-SIE-00503	1793
TA300K	primary	EAT	Series C K-frame line/load terminal , 225 A, Cu/Al	EDH-EAT-00472	592
TA350K	primary	EAT	Series C K-frame line/load terminal , 350 A, Cu/Al	EDH-EAT-00473	593
TA350LK	primary	EAT	Series G LG-frame line/load terminal, 400 A, Cu/Al	EDH-EAT-00551	692
TA3DG02	primary	SIE	VL DG power 3-wire distribution connector, single	EDH-SIE-00591	1814
TA3FG20	primary	SIE	VL FG power 3-wire distribution connector, single	EDH-SIE-00595	1814
TA3K350	primary	SIE	MD/ND (and KM) frame pressure wire connector (1-3) 300-350 kcmil Cu-Al	EDH-SIE-00498	1794
TA3K500	primary	SIE	Siemens TA3K500 lug, LMD/MD 500-800A, 1-3 x 1/0-500	EDH-SIE-00278	1785
TA3N8750	primary	SIE	MD/ND frame multi-cable pressure connector (3) 500-750 kcmil Cu/Al	EDH-SIE-00505	1794
TA3P8750	primary	SIE	MD/ND frame multi-cable pressure connector (3) 500-750 kcmil Cu/Al	EDH-SIE-00504	1794
TA401LD	alias	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00500	609
TA401LD	alias	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00501	611
TA401LD	alias	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00502	614
TA450LD	primary	EAT	Series C L-frame line/load terminal, 450 A, Cu/Al	EDH-EAT-00503	617
TA4H500	primary	SIE	MD/ND frame multi-cable pressure connector (4) #2-500 kcmil Cu/Al	EDH-SIE-00506	1794
TA4N8500	primary	SIE	MD/ND frame multi-cable pressure connector (4) #2-500 kcmil Cu/Al	EDH-SIE-00501	1795
TA4P750	primary	SIE	Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)	EDH-SIE-00297	1817
TA4P8500	primary	SIE	MD/ND frame multi-cable pressure connector (4) #2-500 kcmil Cu/Al	EDH-SIE-00500	1795
TA5P600	primary	SIE	Siemens TA5P600 lug, PD 1200-1600A, 1-5 x 300-600 kcmil	EDH-SIE-00294	1804
TA602LD	primary	EAT	Series C L-frame line/load terminal, 500 A, Cu/Al	EDH-EAT-00504	618
TA602LDCW	primary	EAT	Series C L-frame terminal with control wire termination (TA602LD)	EDH-EAT-00509	619
TA603LD	alias	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00505	610
TA603LD	alias	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00506	612
TA603LD	alias	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00507	614

Number	Type	Mfr	Description	Catalogue ID	Pg
TA632L	primary	EAT	Series G LG-frame single terminal, 630 A, Cu/Al	EDH-EAT-00553	692
TA6DG04	primary	SIE	VL DG power 6-wire distribution connector, single	EDH-SIE-00593	1814
TA6ED06	primary	SIE	Siemens TA6ED06 distribution lug, ED	EDH-SIE-00264	1762
TA6FD04	primary	SIE	Siemens TA6FD04 distribution lug, FD	EDH-SIE-00268	1769
TA6FG04	primary	SIE	VL FG power 6-wire distribution connector, single	EDH-SIE-00597	1815
TA6GG04	primary	SIE	Siemens TA6GG04 distribution lug, NGG/HGG/LGG	EDH-SIE-00250	1753
TA6JD20	primary	SIE	Siemens TA6JD20 distribution lug, JD/LD	EDH-SIE-00275	1776
TA6JG20	primary	SIE	VL JG power distribution connector 6-wire, single	EDH-SIE-00599	1815
TA6PG750	primary	SIE	VL PG 6-cable 750 kcmil Al lug (single)	EDH-SIE-00636	1815
TA6R600	primary	SIE	Siemens TA6R600 lug, PD/RD 1200-2000A, 1-6 x 300-600 kcmil	EDH-SIE-00295	1804
TA700MA1	primary	EAT	Series C M-frame line/load terminal, 600 A, Cu/Al	EDH-EAT-00514	630
TA700MA1CWT	primary	EAT	Series C M-frame terminal with control wire termination (TA700MA1)	EDH-EAT-00519	631
TA700NB1	primary	EAT	Series C N-frame line/load terminal, 700 A, Cu/Al	EDH-EAT-00522	648
TA800MA2	primary	EAT	Series C M-frame line/load terminal, 800 A, Cu/Al	EDH-EAT-00515	631
TA800MA2CWT	primary	EAT	Series C M-frame terminal with control wire termination (TA800MA2)	EDH-EAT-00520	632
TA801MA	primary	EAT	Series C M-frame line/load terminal, 800 A, Cu/Al	EDH-EAT-00516	632
TA801MACWT	primary	EAT	Series C M-frame terminal with control wire termination (TA801MA)	EDH-EAT-00521	633
TAD3	primary	EAT	TAD3 adapter kit - KD breaker onto existing Westinghouse LB-frame connectors	EDH-EAT-00365	488
TAW1FG350	primary	SIE	VL FG Al/Cu lug 350 (single)	EDH-SIE-00614	1815
TB1DPK	primary	GEA	GE CCB panelboard twin mounting hardware, TB1, 15-150 A	EDH-GEA-00591	1117
TB1SPK	primary	GEA	GE CCB panelboard copper strap mounting kit TB1SPK (TB1, 100 A, single)	EDH-GEA-00954	1117
TB1SPK3	alias	GEA	GE CCB panelboard copper strap mounting kit TB1SPK (TB1, 100 A, single)	EDH-GEA-00954	1117
TB4SBK	primary	GEA	GE hardware kit for TB4 frame (single)	EDH-GEA-00593	1117
TB4SPK	primary	GEA	GE CCB panelboard single mounting kit, TB4, 125-400 A	EDH-GEA-00592	1117
TB6SPK	primary	GEA	GE CCB panelboard copper strap mounting kit TB6SPK (TB6, 600 A, single)	EDH-GEA-00955	1118
TB6SPK3	alias	GEA	GE CCB panelboard copper strap mounting kit TB6SPK (TB6, 600 A, single)	EDH-GEA-00955	1118
TB8SPK	primary	GEA	GE CCB panelboard single mounting kit, TB6/TB8, 600-800 A	EDH-GEA-00594	1118
TB8SPK3	alias	GEA	GE CCB panelboard single mounting kit, TB6/TB8, 600-800 A	EDH-GEA-00594	1118
TBPANEL	primary	SQD	NQ & NF tackle box spare parts kit	EDH-SQD-00131	876
TC012	primary	GEA	GE TC012 copper-only lug, E150/TB1 thru 150A	EDH-GEA-00287	1375
TC0121	primary	GEA	GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A	EDH-GEA-00315	1409
TC0131	primary	GEA	GE TC0131 copper lug, TK4V load end	EDH-GEA-00324	1409
TC018	primary	GEA	GE TC018 (TCO18) plated copper lug, SE150	EDH-GEA-00354	1437
TC024	primary	GEA	GE TC024 copper-only lug, TFJ 250A	EDH-GEA-00290	1382
TC041	primary	GEA	GE TC041 copper-only lug, K1200/TB6 300-400A	EDH-GEA-00303	1410
TC0416 / TC0414	alias	GEA	GE TC041 copper-only lug, K1200/TB6 300-400A	EDH-GEA-00303	1410
TC043	primary	GEA	GE TC043 copper-only lug, J400/TB4	EDH-GEA-00297	1395
TC061	primary	GEA	GE TC061 copper-only lug, K1200/TB6 300-600A	EDH-GEA-00307	1410
TC063	primary	GEA	GE TC063 copper-only lug, J600	EDH-GEA-00298	1395
TC081A	primary	GEA	GE TC081A copper lug, K1200/TB8/SK1200 600-800A	EDH-GEA-00311	1411
TC091	primary	GEA	GE TC091 copper lug, TK4V load end	EDH-GEA-00323	1411
TC1DG30	primary	SIE	VL DG Cu lug (single)	EDH-SIE-00609	1815
TC1ED6150	primary	SIE	Siemens TC1ED6150 copper-body lug, ED 30-125A	EDH-SIE-00262	1762
TC1FD350	primary	SIE	Siemens TC1FD350 copper lug, FD 70-250A	EDH-SIE-00266	1769
TC1J6600	primary	SIE	Siemens TC1J6600 copper lug, JD/LD (100% rated)	EDH-SIE-00271	1777
TC1-J6600	alias	SIE	Siemens TC1J6600 copper lug, JD/LD (100% rated)	EDH-SIE-00271	1777

Number	Type	Mfr	Description	Catalogue ID	Pg
TC1Q1	primary	SIE	Siemens TC1Q1 line-side lug, BQ 15-40A (steel)	EDH-SIE-00245	1750
TC1QR250	primary	SIE	QR frame wire connector (single, Cu only)	EDH-SIE-00526	1757
TC2J6500	primary	SIE	Siemens TC2J6500 copper lug, JD/LD (100% rated)	EDH-SIE-00272	1777
TC2-J6500	alias	SIE	Siemens TC2J6500 copper lug, JD/LD (100% rated)	EDH-SIE-00272	1777
TC2K500	primary	SIE	Siemens TC2K500 copper lug, MD 500-600A	EDH-SIE-00279	1785
TC3K350	primary	SIE	MD/ND (and KM) frame pressure wire connector (1-3) #1-350 kcmil Cu only	EDH-SIE-00499	1795
TC5R600	primary	SIE	Siemens TC5R600 copper lug, RD 1600-2000A (also 100% PD)	EDH-SIE-00296	1805
TCAL12	primary	GEA	GE TCAL12 lug, E150/THLC1/TB1 15-60A	EDH-GEA-00284	1375
TCAL121	primary	GEA	GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00312	1412
TCAL1214 / TCAL1212	alias	GEA	GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00312	1412
TCAL122	primary	GEA	GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al	EDH-GEA-00316	1412
TCAL1225 / TCAL1223	alias	GEA	GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al	EDH-GEA-00316	1412
TCAL124	primary	GEA	GE TCAL124 lug, Spectra SK1200, (3) 350-750 kcmil	EDH-GEA-00341	1447
TCAL125	primary	GEA	GE TCAL125 lug, Spectra SK1200, (4) 250-500 kcmil	EDH-GEA-00344	1448
TCAL12A	primary	GEA	GE TCAL12A lug, E150/THLC1/TB1 70-90A	EDH-GEA-00285	1375
TCAL131	primary	GEA	GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00322	1413
TCAL1314 / TCAL1312	alias	GEA	GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00322	1413
TCAL14	primary	GEA	GE TCAL14 lug, E150/THLC1/TB1 15-30A, (1) #14-8	EDH-GEA-00283	1376
TCAL15	primary	GEA	GE TCAL15 lug, E150/THLC1/TB1 100-150A	EDH-GEA-00286	1376
TCAL18	primary	GEA	GE TCAL18 lug, Spectra SE150, (1) #12-3/0	EDH-GEA-00335	1437
TCAL18LV	primary	GEA	GE TCAL18LV lug with control-voltage quick connect, SE150	EDH-GEA-00360	1437
TCAL19PD1	primary	GEA	GE TCAL19PD1 power distribution lug, SE1/TED 125A	EDH-GEA-00363	1438
TCAL19PD3	primary	GEA	GE TCAL19PD3 3-lug power distribution kit, SE1/TED	EDH-GEA-00364	1436
TCAL24	primary	GEA	GE TCAL24 lug, F225, (1) #4-300 kcmil Cu-Al	EDH-GEA-00288	1382
TCAL25	primary	GEA	GE TCAL25 lug, TQD, (1) #4-300 kcmil Cu-Al	EDH-GEA-00281	1465
TCAL27	primary	GEA	GE TCAL27 lug, THLC2, (1) #4-300 kcmil Cu-Al	EDH-GEA-00291	1382
TCAL28PD1	primary	GEA	GE TCAL28PD1 power distribution lug, SF 250A	EDH-GEA-00365	1440
TCAL28PD3	primary	GEA	GE TCAL28PD3 3-lug power distribution kit, SF	EDH-GEA-00366	1439
TCAL29	primary	GEA	GE TCAL29 lug, Spectra SF250, (1) #8-350 kcmil	EDH-GEA-00337	1440
TCAL29LV	primary	GEA	GE TCAL29LV lug with control-voltage quick connect, SF250	EDH-GEA-00361	1440
TCAL40PD1	primary	GEA	GE TCAL40PD1 power distribution lug, SG 400A	EDH-GEA-00367	1444
TCAL40PD3	primary	GEA	GE TCAL40PD3 3-lug power distribution kit, SG	EDH-GEA-00368	1442
TCAL41	primary	GEA	GE TCAL41 lug, K1200/TB6 300-400A	EDH-GEA-00301	1413
TCAL43	primary	GEA	GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD	EDH-GEA-00292	1396
TCAL433	alias	GEA	GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD	EDH-GEA-00292	1396
TCAL47	primary	GEA	GE TCAL47 lug, J400/TJD, (1) 750 kcmil Cu-Al	EDH-GEA-00293	1396
TCAL61	primary	GEA	GE TCAL61 lug, K1200/TB6 300-600A, (2) 2/0-500	EDH-GEA-00304	1413
TCAL63	primary	GEA	GE TCAL63 lug, J600 450-600A	EDH-GEA-00295	1396
TCAL81	primary	GEA	GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500	EDH-GEA-00308	1414
TCAL812 / TCAL811	alias	GEA	GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500	EDH-GEA-00308	1414
TCAL91	primary	GEA	GE TCAL91 lug, TK4V load end, (3) 3/0-500	EDH-GEA-00319	1414
TCAL912 / TCAL911	alias	GEA	GE TCAL91 lug, TK4V load end, (3) 3/0-500	EDH-GEA-00319	1414
TCALK2121	primary	GEA	GE TCALK2121 2-lug kit with wrench (TCAL121)	EDH-GEA-00313	1405
TCALK21214 / TCALK21212	alias	GEA	GE TCALK2121 2-lug kit with wrench (TCAL121)	EDH-GEA-00313	1405
TCALK2122	primary	GEA	GE TCALK2122 2-lug kit (TCAL122)	EDH-GEA-00317	1405
TCALK21225 / TCALK21223	alias	GEA	GE TCALK2122 2-lug kit (TCAL122)	EDH-GEA-00317	1405

Number	Type	Mfr	Description	Catalogue ID	Pg
TCALK2124	primary	GEA	GE TCALK2124 2-lug kit with wrench (TCAL124)	EDH-GEA-00342	1446
TCALK2125	primary	GEA	GE TCALK2125 2-lug kit with wrench (TCAL125)	EDH-GEA-00345	1446
TCALK261	primary	GEA	GE TCALK261 2-lug kit with wrench, K1200/TB6	EDH-GEA-00305	1406
TCALK281	primary	GEA	GE TCALK281 2-lug kit with wrench (TCAL81)	EDH-GEA-00309	1406
TCALK2812 / TCALK2811	alias	GEA	GE TCALK281 2-lug kit with wrench (TCAL81)	EDH-GEA-00309	1406
TCALK291	primary	GEA	GE TCALK291 2-lug kit, TK4V load end	EDH-GEA-00320	1406
TCALK2912 / TCALK2911	alias	GEA	GE TCALK291 2-lug kit, TK4V load end	EDH-GEA-00320	1406
TCALK3121	primary	GEA	GE TCALK3121 3-lug kit with wrench (TCAL121)	EDH-GEA-00314	1407
TCALK31214 / TCALK31212	alias	GEA	GE TCALK3121 3-lug kit with wrench (TCAL121)	EDH-GEA-00314	1407
TCALK3122	primary	GEA	GE TCALK3122 3-lug kit (TCAL122)	EDH-GEA-00318	1407
TCALK31225 / TCALK31223	alias	GEA	GE TCALK3122 3-lug kit (TCAL122)	EDH-GEA-00318	1407
TCALK3124	primary	GEA	GE TCALK3124 3-lug kit with wrench (TCAL124)	EDH-GEA-00343	1447
TCALK3125	primary	GEA	GE TCALK3125 3-lug kit with wrench (TCAL125)	EDH-GEA-00346	1447
TCALK318	primary	GEA	GE TCALK318 3-lug kit, Spectra SE150	EDH-GEA-00336	1436
TCALK324	primary	GEA	GE TCALK324 3-lug kit, F225	EDH-GEA-00289	1381
TCALK325	primary	GEA	GE TCALK325 3-lug kit, TQD, (1) #4-300 kcmil Cu-Al	EDH-GEA-00282	1465
TCALK329	primary	GEA	GE TCALK329 3-lug kit, Spectra SF250	EDH-GEA-00338	1439
TCALK341	primary	GEA	GE TCALK341 3-lug kit, K1200/TB6 300-400A	EDH-GEA-00302	1407
TCALK343	primary	GEA	GE TCALK343 3-lug kit, TLB4/THLC4	EDH-GEA-00300	1394
TCALK347	primary	GEA	GE TCALK347 3-lug kit, J400/TJD 750 kcmil	EDH-GEA-00294	1394
TCALK361	primary	GEA	GE TCALK361 3-lug kit with wrench, K1200/TB6	EDH-GEA-00306	1408
TCALK363	primary	GEA	GE TCALK363 3-lug kit, J600 450-600A	EDH-GEA-00296	1395
TCALK381	primary	GEA	GE TCALK381 3-lug kit with wrench (TCAL81)	EDH-GEA-00310	1408
TCALK3812 / TCALK3811	alias	GEA	GE TCALK381 3-lug kit with wrench (TCAL81)	EDH-GEA-00310	1408
TCALK391	primary	GEA	GE TCALK391 3-lug kit, TK4V load end	EDH-GEA-00321	1408
TCALK3912 / TCALK3911	alias	GEA	GE TCALK391 3-lug kit, TK4V load end	EDH-GEA-00321	1408
TCE2	primary	SIE	E/CLE frame replacement plug-in (tulip) adapter, 2-pole	EDH-SIE-00478	1764
TCE3	primary	SIE	E/CLE frame replacement plug-in (tulip) adapter, 3-pole	EDH-SIE-00479	1764
TCF2	primary	SIE	FD frame replacement plug-in tulip adapter, 2-pole	EDH-SIE-00484	1770
TCF3	primary	SIE	FD frame replacement plug-in tulip adapter, 3-pole	EDH-SIE-00485	1770
TCH65K	primary	SIE	Siemens BQ mounting adapter	EDH-SIE-00772	1685
TCIQ250	primary	SIE	QJ frame 1-cavity copper connector (6 AWG-250 kcmil)	EDH-SIE-00665	1755
TCJ2	primary	SIE	JD/LD frame replacement plug-in tulip adapter, 2-pole	EDH-SIE-00493	1778
TCJ3	primary	SIE	JD/LD frame replacement plug-in tulip adapter, 3-pole	EDH-SIE-00494	1779
TCLK265	primary	GEA	GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00339	1442
TCLK2652 / TCLK2651 (as printed)	alias	GEA	GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00339	1442
TCLK365	primary	GEA	GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00340	1443
TCLK3652 / TCLK3653 / TCLK3654 (as printed)	alias	GEA	GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00340	1443
TCLK43	primary	GEA	GE TCLK43 lug, TLB4/THLC4	EDH-GEA-00299	1397
TCM2	primary	SIE	MD frame replacement plug-in adapter, 2-pole	EDH-SIE-00516	1799
TCM3	primary	SIE	MD frame replacement plug-in adapter, 3-pole	EDH-SIE-00517	1799
TCN2	primary	SIE	MD/ND frame replacement plug-in adapter, 2-pole	EDH-SIE-00518	1803
TCN3	primary	SIE	MD/ND frame replacement plug-in adapter, 3-pole	EDH-SIE-00519	1803
TCO121	alias	GEA	GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A	EDH-GEA-00315	1409
TCO124	primary	GEA	GE TCO124 plated copper lug, SK1200 (3) 350-750	EDH-GEA-00358	1448
TCO125	primary	GEA	GE TCO125 plated copper lug, SK1200 (4) 250-500	EDH-GEA-00359	1448
TCO18	alias	GEA	GE TC018 (TCO18) plated copper lug, SE150	EDH-GEA-00354	1437
TCO29	primary	GEA	GE TCO29 plated copper lug, SF250	EDH-GEA-00355	1441
TCO81A	alias	GEA	GE TC081A copper lug, K1200/TB8/SK1200 600-800A	EDH-GEA-00311	1411

Number	Type	Mfr	Description	Catalogue ID	Pg
TCOK265	primary	GEA	GE TCOK265 2-pole copper lug kit, SG600	EDH-GEA-00356	1443
TCOK365	primary	GEA	GE TCOK365 3-pole copper lug kit, SG600	EDH-GEA-00357	1443
TCW1FG350	primary	SIE	VL FG Cu lug (single)	EDH-SIE-00617	1816
TE12PD1	primary	GEA	GE plug-in mounting base TE12PD1 (E150 2-pole, OLS studs)	EDH-GEA-00726	1377
TE12PD2	primary	GEA	GE plug-in mounting base TE12PD2 (E150 2-pole, SLO studs)	EDH-GEA-00727	1377
TE13PC1	primary	GEA	GE plug-in mounting base TE13PC1 (SE150 / E150 3-pole (vertical studs; example i	EDH-GEA-00758	1450
TE13PD1	primary	GEA	GE plug-in mounting base TE13PD1 (SE150 / E150 3-pole (also TB1 in 2012), SLS st	EDH-GEA-00728	1450
TE13PD2	primary	GEA	GE plug-in mounting base TE13PD2 (SE150 / E150 3-pole (also TB1 in 2012), LSL st	EDH-GEA-00729	1451
TEC1	primary	EAT	Series C F-frame terminal end cover, 0.25 opening	EDH-EAT-00645	542
TEC2	primary	EAT	Series C F-frame terminal end cover, 0.41 opening	EDH-EAT-00646	543
TED1DPK	primary	GEA	CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)	EDH-GEA-00256	1118
TED1DPK	equivalent	OTH	Aftermarket bus connection kit BTEDGE (seller cross-ref to GEA TED1DPK)	EDH-OTH-00037	1113
TED1DPK2	primary	GEA	GE CCB panelboard twin mounting hardware, E-frame 150 A (variant 2)	EDH-GEA-00598	1119
TED1K	alias	OTH	Aftermarket bus connection kit BTEDGE (seller cross-ref to GEA TED1DPK)	EDH-OTH-00037	1113
TEDFP1	primary	GEA	A-Series filler plate for TQD/THQD/TED4/SE/FB	EDH-GEA-00040	1070
TEDLS	primary	GEA	GE TEDLS line shield, TEB/TEC/TED/THED	EDH-GEA-00325	1378
TEDPLD2	primary	GEA	GE EUSERC-approved padlocking device for E150	EDH-GEA-00639	1358
TEF1	primary	GEA	GE TEF1 back-connected line/load stud, E150 2-pole, TB1, THLC1, 2 25/32 in (shor	EDH-GEA-00386	1380
TEF2	primary	GEA	GE TEF2 back-connected line/load stud, E150 2-pole, TB1, THLC1, 4 13/32 in (long	EDH-GEA-00387	1380
TEF3	primary	GEA	GE TEF3 back-connected line/load stud, E150 2-pole, TB1, THLC1, 3 13/32 in (shor	EDH-GEA-00388	1380
TEF4	primary	GEA	GE TEF4 back-connected line/load stud, E150 2-pole, TB1, THLC1, 5 25/32 in (long	EDH-GEA-00389	1381
TEFPLD1	primary	GEA	GE standard padlocking device for E150 line, TB1	EDH-GEA-00630	1088
TEL1DPK	primary	GEA	CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)	EDH-GEA-00261	1119
TEL1DPK	equivalent	OTH	Aftermarket bus connection kit BTELGE (seller cross-ref to GEA TEL1DPK)	EDH-OTH-00038	1113
TEL1K	alias	OTH	Aftermarket bus connection kit BTELGE (seller cross-ref to GEA TEL1DPK)	EDH-OTH-00038	1113
TEU-1	primary	GEA	GE extra key for panelboard door locks	EDH-GEA-00588	1158
TEY3B	primary	GEA	GE TEY3B bolt-on mounting base (TEY / THQB, up to 3 poles)	EDH-GEA-00716	1463
TEY3B1	alias	GEA	GE TEY3B bolt-on mounting base (TEY / THQB, up to 3 poles)	EDH-GEA-00716	1463
TEY3B125	primary	GEA	GE TEY3B125 mounting base for TEYD/TEYH/TEYL 3-pole 110/125 A	EDH-GEA-00717	1464
TEYLD1	primary	GEA	GE handle locking device (non-padlocking) for TEY	EDH-GEA-00646	1082
TEYPLD1	primary	GEA	GE standard padlocking device for TEY	EDH-GEA-00629	1088
TEYXHT2	primary	GEA	GE TEYD/H/L 2-pole handle tie	EDH-GEA-00624	1082
TEYXHT2K	primary	GEA	GE TEYD/H/L 2-pole handle tie, 10-pack	EDH-GEA-00625	1082
TEYXHT3	primary	GEA	GE TEYD/H/L 3-pole handle tie	EDH-GEA-00626	1082
TEYXHT3K	primary	GEA	GE TEYD/H/L 3-pole handle tie, 10-pack	EDH-GEA-00627	1083
TEYXPLD1	primary	GEA	GE padlock device for TEYD/TEYH/TEYL	EDH-GEA-00628	1088
TF22PD1	primary	GEA	GE plug-in mounting base TF22PD1 (F225 / SF250 2-pole, SOS studs)	EDH-GEA-00730	1383
TF22PD2	primary	GEA	GE plug-in mounting base TF22PD2 (F225 / SF250 2-pole, LOL studs)	EDH-GEA-00731	1383
TF23PC1	primary	GEA	GE plug-in mounting base TF23PC1 (SF250 3-pole, vertical studs (SLS))	EDH-GEA-00759	1453

Number	Type	Mfr	Description	Catalogue ID	Pg
TF23PD1	primary	GEA	GE plug-in mounting base TF23PD1 (F225 / SF250 3-pole, SLS studs)	EDH-GEA-00732	1384
TF23PD2	primary	GEA	GE plug-in mounting base TF23PD2 (F225 / SF250 3-pole, LSL studs)	EDH-GEA-00733	1384
TF2DPK	primary	GEA	CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)	EDH-GEA-00257	1119
TF2DPK	equivalent	OTH	Aftermarket bus connection kit BTFKGE (seller cross-ref to GEA TF2DPK)	EDH-OTH-00040	1113
TFAK52	primary	SIE	Vacu-Break switch fuse clip adapter kit	EDH-SIE-00747	1748
TFAK55	primary	SIE	Vacu-Break switch fuse clip adapter kit	EDH-SIE-00748	1748
TFAK62	primary	SIE	Vacu-Break switch fuse clip adapter kit	EDH-SIE-00749	1748
TFAK65	primary	SIE	Vacu-Break switch fuse clip adapter kit	EDH-SIE-00750	1748
TFK1	primary	GEA	GE TFK1 back-connected line/load stud, TFJ, TFK, THFK, 2 23/32 in (short)	EDH-GEA-00390	1386
TFK1K	alias	OTH	Aftermarket bus connection kit BTFKGE (seller cross-ref to GEA TF2DPK)	EDH-OTH-00040	1113
TFK2	primary	GEA	GE TFK2 back-connected line/load stud, TFJ, TFK, THFK, 5 31/32 in (long)	EDH-GEA-00391	1386
TFKLD1	primary	GEA	GE handle locking device (non-padlocking) for F225 line	EDH-GEA-00648	1083
TFKLS	primary	GEA	GE TFKLS line shield, TFJ/TFK/TFC	EDH-GEA-00326	1385
TFKPLD1	primary	GEA	GE standard padlocking device for F225 line	EDH-GEA-00631	1088
TGL2	primary	GEA	A-Series Equipment ground, standard bonded to box, per 12 branch positions	EDH-GEA-00096	1068
TGL20	primary	GEA	A-Series Main lug for equipment ground terminal kits	EDH-GEA-00095	1069
THFP221X	primary	GEA	GE QMR fusible switch unit THFP221X (30 A, 2-pole, 240 V, 3X unit - old style)	EDH-GEA-00968	1140
THFP221XL	primary	GEA	GE QMR fusible switch unit THFP221XL (30 A, 2-pole, 240 V, 3X left hand unit - o	EDH-GEA-00969	1140
THFP222X	primary	GEA	GE QMR fusible switch unit THFP222X (60 A, 2-pole, 240 V, 3X unit - old style)	EDH-GEA-00974	1140
THFP222XL	primary	GEA	GE QMR fusible switch unit THFP222XL (60 A, 2-pole, 240 V, 3X left hand unit - o	EDH-GEA-00975	1141
THFP223	primary	GEA	GE QMR fusible switch unit THFP223 (100 A, 2-pole, 240 V, old style)	EDH-GEA-00977	1141
THFP223L	primary	GEA	GE QMR fusible switch unit THFP223L (100 A, 2-pole, 240 V, left hand unit - old	EDH-GEA-00978	1141
THFP223X	primary	GEA	GE QMR fusible switch unit THFP223X (100 A, 2-pole, 240 V, 3X unit - old style)	EDH-GEA-00979	1141
THFP223XL	primary	GEA	GE QMR fusible switch unit THFP223XL (100 A, 2-pole, 240 V, 3X left hand unit -	EDH-GEA-00980	1142
THFP224	primary	GEA	GE QMR fusible switch unit THFP224 (200 A, 2-pole, 240 V, old style)	EDH-GEA-00982	1142
THFP225	primary	GEA	GE QMR fusible switch unit THFP225 (400 A, 2-pole, 240 V, old style)	EDH-GEA-00984	1142
THFP226	primary	GEA	GE QMR fusible switch unit THFP226 (600 A, 2-pole, 240 V, old style)	EDH-GEA-00986	1142
THFP22SPK	primary	GEA	GE QMR panelboard copper mounting kit THFP22SPK (THFP fusible switch, 30/60 A, s	EDH-GEA-00964	1119
THFP261	primary	GEA	GE QMR fusible switch unit THFP261 (30 A, 2-pole, 600 V, old style)	EDH-GEA-00988	1143
THFP261L	primary	GEA	GE QMR fusible switch unit THFP261L (30 A, 2-pole, 600 V, left hand unit - old s	EDH-GEA-00989	1143
THFP262	primary	GEA	GE QMR fusible switch unit THFP262 (60 A, 2-pole, 600 V, old style)	EDH-GEA-00992	1143
THFP262L	primary	GEA	GE QMR fusible switch unit THFP262L (60 A, 2-pole, 600 V, left hand unit - old s	EDH-GEA-00993	1143
THFP263	primary	GEA	GE QMR fusible switch unit THFP263 (100 A, 2-pole, 600 V, old style)	EDH-GEA-00996	1144
THFP263L	primary	GEA	GE QMR fusible switch unit THFP263L (100 A, 2-pole, 600 V, old style (printed; L	EDH-GEA-00997	1144

Number	Type	Mfr	Description	Catalogue ID	Pg
THFP321	primary	GEA	GE QMR fusible switch unit THFP321 (30 A, 3-pole, 240 V, old style)	EDH-GEA-00970	1144
THFP321L	primary	GEA	GE QMR fusible switch unit THFP321L (30 A, 3-pole, 240 V, left hand unit - old s	EDH-GEA-00971	1144
THFP321X	primary	GEA	GE QMR fusible switch unit THFP321X (30 A, 3-pole, 240 V, 3X unit - old style)	EDH-GEA-00972	1145
THFP321XL	primary	GEA	GE QMR fusible switch unit THFP321XL (30 A, 3-pole, 240 V, 3X left hand unit - o	EDH-GEA-00973	1145
THFP322	primary	GEA	GE QMR fusible switch unit THFP322 (60 A, 3-pole, 240 V, old style)	EDH-GEA-00976	1145
THFP323	primary	GEA	GE QMR fusible switch unit THFP323 (100 A, 3-pole, 240 V, old style)	EDH-GEA-00981	1145
THFP324	primary	GEA	GE QMR fusible switch unit THFP324 (200 A, 3-pole, 240 V, old style)	EDH-GEA-00983	1146
THFP325	primary	GEA	GE QMR fusible switch unit THFP325 (400 A, 3-pole, 240 V, old style)	EDH-GEA-00985	1146
THFP326	primary	GEA	GE QMR fusible switch unit THFP326 (600 A, 3-pole, 240 V, old style)	EDH-GEA-00987	1146
THFP361	primary	GEA	GE QMR fusible switch unit THFP361 (30 A, 3-pole, 600 V, old style)	EDH-GEA-00990	1146
THFP361L	primary	GEA	GE QMR fusible switch unit THFP361L (30 A, 3-pole, 600 V, left hand unit - old s	EDH-GEA-00991	1147
THFP362	primary	GEA	GE QMR fusible switch unit THFP362 (60 A, 3-pole, 600 V, old style)	EDH-GEA-00994	1147
THFP362L	primary	GEA	GE QMR fusible switch unit THFP362L (60 A, 3-pole, 600 V, left hand unit - old s	EDH-GEA-00995	1147
THFP363	primary	GEA	GE QMR fusible switch unit THFP363 (100 A, 3-pole, 600 V, old style)	EDH-GEA-00998	1147
THFP363L	primary	GEA	GE QMR fusible switch unit THFP363L (100 A, 3-pole, 600 V, old style (printed; L	EDH-GEA-00999	1148
THFP364	primary	GEA	GE QMR fusible switch unit THFP364 (200 A, 3-pole, 600 V, old style)	EDH-GEA-01000	1148
THFP365	primary	GEA	GE QMR fusible switch unit THFP365 (400 A, 3-pole, 600 V, old style)	EDH-GEA-01001	1148
THFP366	primary	GEA	GE QMR fusible switch unit THFP366 (600 A, 3-pole, 600 V, old style)	EDH-GEA-01002	1148
THFP367	primary	GEA	GE QMR fusible switch unit THFP367 (800 A, 3-pole, 600 V, old style)	EDH-GEA-01003	1149
THFP368	primary	GEA	GE QMR fusible switch unit THFP368 (1200 A, 3-pole, 600 V, old style)	EDH-GEA-01004	1149
THFP62DPK	primary	GEA	GE QMR panelboard copper mounting kit THFP62DPK (THFP fusible switch, 30-60 A, d	EDH-GEA-00961	1120
THFP62SPK	primary	GEA	GE QMR panelboard copper mounting kit THFP62SPK (THFP fusible switch, 30/60/100	EDH-GEA-00965	1120
THFP63DPK	primary	GEA	GE QMR panelboard twin mounting hardware for THFP fusible switch, 100 A	EDH-GEA-00600	1120
THFP63DPKC	primary	GEA	GE QMR panelboard copper mounting kit THFP63DPKC (THFP fusible switch, 100-30/60	EDH-GEA-00963	1120
THFP63DPKJ	primary	GEA	GE QMR panelboard copper mounting kit THFP63DPKJ (THFP fusible switch, 100 A, du	EDH-GEA-00962	1121
THFP63SPK	primary	GEA	GE QMR panelboard single mounting hardware for THFP fusible switch, 100 A	EDH-GEA-00601	1121
THFP64SPK	primary	GEA	GE QMR panelboard single mounting hardware for THFP fusible switch, 200 A	EDH-GEA-00602	1121
THFP65SPK	primary	GEA	GE QMR panelboard single mounting hardware for THFP fusible switch, 400 A	EDH-GEA-00603	1121
THFP66SPK	primary	GEA	GE QMR panelboard copper mounting kit THFP66SPK (THFP fusible switch, 600 A, sin	EDH-GEA-00966	1122
THFP67SPK	primary	GEA	GE QMR panelboard copper mounting kit THFP67SPK (THFP fusible switch, 1200 A, si	EDH-GEA-00967	1122

Number	Type	Mfr	Description	Catalogue ID	Pg
THJV6DPK	primary	GEA	GE CCB panelboard mounting hardware for THJV (listed 'twin mounted')	EDH-GEA-00597	1122
THL103	primary	GEA	GE breaker handle locking device (non-padlocking) for TQB, TQC and TQL breakers,	EDH-GEA-00573	1083
THLC1DPK	primary	GEA	GE CCB panelboard copper strap mounting kit THLC1DPK (TLB1/THLC1, 150 A, dual)	EDH-GEA-00953	1122
THLC1SPK	primary	GEA	GE CCB panelboard copper strap mounting kit THLC1SPK (TLB1, 150 A, single)	EDH-GEA-00958	1123
THLC4SPK	primary	GEA	GE CCB panelboard copper strap mounting kit THLC4SPK (TLB4, 400 A, single)	EDH-GEA-00959	1123
THLCDPK	primary	GEA	GE hardware kit for AV panel (THLC breaker, twin)	EDH-GEA-00607	1373
THP100	primary	GEA	GE breaker handle padlocking device for TQB and TQL breakers, Model 3	EDH-GEA-00575	1089
THQCFMK	primary	GEA	GE THQCFMK front/rear mounting clips for THQC (pack of 48)	EDH-GEA-00795	1394
THQGFPLD1	primary	GEA	GE padlocking handle lock for single-pole Q-Line GF breakers	EDH-GEA-00613	1089
THT104	primary	GEA	GE snap-on handle tie, solid, Q-Line	EDH-GEA-00620	1084
TIKFD	primary	SQD	E-frame terminal nut insert kit (3 per kit)	EDH-SQD-00120	815
TJ42PD1A	primary	GEA	GE plug-in mounting base TJ42PD1A (J400 2-pole (also TB4 in 2012), SOS studs)	EDH-GEA-00734	1398
TJ42PD2A	primary	GEA	GE plug-in mounting base TJ42PD2A (J400 2-pole (also TB4 in 2012), LOL studs)	EDH-GEA-00735	1398
TJ43PC1A	primary	GEA	GE plug-in mounting base TJ43PC1A (J400 3-pole, vertical studs (SLS))	EDH-GEA-00760	1399
TJ43PD1A	primary	GEA	GE plug-in mounting base TJ43PD1A (J400 3-pole (also TB4 in 2012), SLS studs)	EDH-GEA-00736	1399
TJ43PD2A	primary	GEA	GE plug-in mounting base TJ43PD2A (J400 3-pole (also TB4 in 2012), LSL studs)	EDH-GEA-00737	1400
TJ4DPK	primary	GEA	CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)	EDH-GEA-00259	1123
TJ4DPK	equivalent	OTH	Aftermarket bus connection kit BTJK4GE (seller cross-ref to GEA TJ4DPK)	EDH-OTH-00041	1114
TJ62PD1A	primary	GEA	GE plug-in mounting base TJ62PD1A (J600 2-pole, SOS studs)	EDH-GEA-00738	1400
TJ62PD2A	primary	GEA	GE plug-in mounting base TJ62PD2A (J600 2-pole, LOL studs)	EDH-GEA-00739	1401
TJ63PC1A	primary	GEA	GE plug-in mounting base TJ63PC1A (J600 3-pole, vertical studs (SLS))	EDH-GEA-00761	1401
TJ63PD1A	primary	GEA	GE plug-in mounting base TJ63PD1A (J600 3-pole, SLS studs)	EDH-GEA-00740	1402
TJ63PD2A	primary	GEA	GE plug-in mounting base TJ63PD2A (J600 3-pole, LSL studs)	EDH-GEA-00741	1402
TJ6DPK	primary	GEA	CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)	EDH-GEA-00260	1124
TJ6DPK	equivalent	OTH	Aftermarket bus connection kit BTJK6GE (seller cross-ref to GEA TJ6DPK)	EDH-OTH-00042	1114
TJ6SPK	primary	GEA	GE CCB panelboard single-mounted strap kit, 600 A J-frame	EDH-GEA-00596	1124
TJ9SPK	primary	GEA	GE CCB panelboard copper strap mounting kit TJ9SPK (TJL1-6, S / TJH1-6S, 600 A,	EDH-GEA-00957	1124
TJK4K	alias	OTH	Aftermarket bus connection kit BTJK4GE (seller cross-ref to GEA TJ4DPK)	EDH-OTH-00041	1114
TJK6K	alias	OTH	Aftermarket bus connection kit BTJK6GE (seller cross-ref to GEA TJ6DPK)	EDH-OTH-00042	1114
TJKLS	primary	GEA	GE TJKLS line shield, TJJ/TJK/TJC	EDH-GEA-00327	1403
TJKPLD1	primary	GEA	GE standard padlocking device for J600 line	EDH-GEA-00632	1358
TJKPLD2	primary	GEA	GE EUSERC-approved padlocking device for J600	EDH-GEA-00642	1359
TJLVK	primary	GEA	GE TJLVK line voltage control wire kit, J600	EDH-GEA-00334	1404
TJLVK8 (as printed)	alias	GEA	GE TJLVK line voltage control wire kit, J600	EDH-GEA-00334	1404
TK102PD1A	primary	GEA	GE plug-in mounting base TK102PD1A (K1200 1000 A 2-pole, SOS studs)	EDH-GEA-00750	1415
TK102PD2A	primary	GEA	GE plug-in mounting base TK102PD2A (K1200 1000 A 2-pole, LOL studs)	EDH-GEA-00751	1416

Number	Type	Mfr	Description	Catalogue ID	Pg
TK103PC1A	primary	GEA	GE plug-in mounting base TK103PC1A (SK1200 1000 A, vertical studs (SLS))	EDH-GEA-00764	1458
TK103PC2A	primary	GEA	GE plug-in mounting base TK103PC2A (SK1200 1000 A, vertical studs (LSL))	EDH-GEA-00765	1458
TK103PD1A	primary	GEA	GE plug-in mounting base TK103PD1A (SK1200 / K1200 1000 A 3-pole, SLS studs)	EDH-GEA-00752	1458
TK103PD2A	primary	GEA	GE plug-in mounting base TK103PD2A (SK1200 / K1200 1000 A 3-pole, LSL studs)	EDH-GEA-00753	1459
TK122PD1A	primary	GEA	GE plug-in mounting base TK122PD1A (K1200 1200 A 2-pole, SOS studs)	EDH-GEA-00754	1416
TK122PD2A	primary	GEA	GE plug-in mounting base TK122PD2A (K1200 1200 A 2-pole, LOL studs)	EDH-GEA-00755	1417
TK123PC1A	primary	GEA	GE plug-in mounting base TK123PC1A (SK1200 1200 A, vertical studs (SLS))	EDH-GEA-00766	1459
TK123PC2A	primary	GEA	GE plug-in mounting base TK123PC2A (SK1200 1200 A, vertical studs (LSL))	EDH-GEA-00767	1459
TK123PD1A	primary	GEA	GE plug-in mounting base TK123PD1A (SK1200 / K1200 1200 A 3-pole, SLS studs)	EDH-GEA-00756	1460
TK123PD2A	primary	GEA	GE plug-in mounting base TK123PD2A (SK1200 / K1200 1200 A 3-pole, LSL studs)	EDH-GEA-00757	1460
TK12SPK	primary	GEA	CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)	EDH-GEA-00264	1125
TK12SPK	equivalent	OTH	Aftermarket bus connection kit BTK12GE (seller cross-ref to GEA TK12SPK)	EDH-OTH-00045	1114
TK12SPK3,4	alias	GEA	CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)	EDH-GEA-00264	1125
TK62PD1A	primary	GEA	GE plug-in mounting base TK62PD1A (K1200 600 A / TB6 2-pole, SOS studs)	EDH-GEA-00742	1417
TK62PD2A	primary	GEA	GE plug-in mounting base TK62PD2A (K1200 600 A / TB6 2-pole, LOL studs)	EDH-GEA-00743	1418
TK63PD1A	primary	GEA	GE plug-in mounting base TK63PD1A (K1200 600 A / TB6 3-pole, SLS studs)	EDH-GEA-00744	1418
TK63PD2A	primary	GEA	GE plug-in mounting base TK63PD2A (K1200 600 A / TB6 3-pole, LSL studs)	EDH-GEA-00745	1419
TK82PD1A	primary	GEA	GE plug-in mounting base TK82PD1A (K1200 800 A / TB8 2-pole, SOS studs)	EDH-GEA-00746	1419
TK82PD2A	primary	GEA	GE plug-in mounting base TK82PD2A (K1200 800 A / TB8 2-pole, LOL studs)	EDH-GEA-00747	1420
TK83PC1A	primary	GEA	GE plug-in mounting base TK83PC1A (SK800 3-pole, vertical studs (SLS))	EDH-GEA-00762	1461
TK83PC2A	primary	GEA	GE plug-in mounting base TK83PC2A (SK800 3-pole, vertical studs (LSL))	EDH-GEA-00763	1461
TK83PD1A	primary	GEA	GE plug-in mounting base TK83PD1A (SK800 / K1200 800 A / TB8 3-pole, SLS studs)	EDH-GEA-00748	1461
TK83PD2A	primary	GEA	GE plug-in mounting base TK83PD2A (SK800 / K1200 800 A / TB8 3-pole, LSL studs)	EDH-GEA-00749	1462
TK8SPK	primary	GEA	CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)	EDH-GEA-00263	1125
TK8SPK	equivalent	OTH	Aftermarket bus connection kit BTK8GE (seller cross-ref to GEA TK8SPK)	EDH-OTH-00044	1115
TK8SPK3	alias	GEA	CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)	EDH-GEA-00263	1125
TK9SPK	primary	GEA	GE QMR panel mount for TKL/TKH breakers, 1200 A 600 V	EDH-GEA-00599	1125
TKL12SPK	primary	GEA	GE CCB panelboard copper strap mounting kit TKL12SPK (TK4V/THK4V/TKL4V, 1200 A,	EDH-GEA-00956	1126
TKL12SPK4	alias	GEA	GE CCB panelboard copper strap mounting kit TKL12SPK (TK4V/THK4V/TKL4V, 1200 A,	EDH-GEA-00956	1126
TKM11	primary	GEA	GE TKM11 back-connected line/load stud, K1200, TB6, TB8, 5 1/2 in	EDH-GEA-00394	1423
TKM12	primary	GEA	GE TKM12 back-connected line/load stud, K1200, TB6, TB8, 8 in	EDH-GEA-00395	1423

Number	Type	Mfr	Description	Catalogue ID	Pg
TKM12K	alias	OTH	Aftermarket bus connection kit BTK12GE (seller cross-ref to GEA TK12SPK)	EDH-OTH-00045	1114
TKM8K	alias	OTH	Aftermarket bus connection kit BTK8GE (seller cross-ref to GEA TK8SPK)	EDH-OTH-00044	1115
TKMC1	primary	GEA	GE TKMC1 connector (back strap), TKM	EDH-GEA-00332	1420
TKMPLD1	primary	GEA	GE standard padlocking device for K1200 line	EDH-GEA-00633	1359
TLC1PLD1	primary	GEA	GE standard padlocking device for THLC1	EDH-GEA-00637	1109
TLC1PLD2	primary	GEA	GE EUSERC-approved padlocking device for THLC1	EDH-GEA-00644	1359
TLC4PLD1	primary	GEA	GE standard padlocking device for THLC2, THLC4, TLB4	EDH-GEA-00638	1110
TLC4PLD2	primary	GEA	GE EUSERC-approved padlocking device for THLC2/4	EDH-GEA-00645	1359
TLD3	primary	GEA	GE handle locking device (non-padlocking) for E150 line	EDH-GEA-00647	1084
TMP1	primary	GEA	GE optional plug-in mounting plate TMP1 (E150 2-pole/3-pole and SE150 plug-in ba	EDH-GEA-00771	1378
TMP2	primary	GEA	GE optional plug-in mounting plate TMP2 (F225/SF250 plug-in bases)	EDH-GEA-00772	1385
TMP3	primary	GEA	GE optional plug-in mounting plate TMP3 (J400/J600 plug-in bases)	EDH-GEA-00773	1403
TMP4	primary	GEA	GE optional plug-in mounting plate TMP4 (K1200/SK800/SK1200 plug-in bases)	EDH-GEA-00774	1421
TMP5	primary	GEA	GE optional plug-in mounting plate TMP5 (TB1 with TE13PD bases)	EDH-GEA-00776	1387
TMP6	primary	GEA	GE optional plug-in mounting plate TMP6 (TB4 with TJ42PD/TJ43PD bases)	EDH-GEA-00777	1387
TMP7	primary	GEA	GE optional plug-in mounting plate TMP7 (TB6/TB8 with TK6x/TK8x bases)	EDH-GEA-00778	1388
TNKG3	primary	SIE	Siemens TNKG3 nut keeper plate (pkg of 3), NGG	EDH-SIE-00249	1754
TP8SPK	primary	GEA	GE mounting hardware for Tri-Pac 800 A breaker (CCB/AV)	EDH-GEA-00595	1126
TPS3 09	primary	SIE	TPS3 09 SPD module kit for Type P1 lighting panelboard (250 A max P1)	EDH-SIE-00422	1482
TQ2DPK	primary	GEA	CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)	EDH-GEA-00258	1126
TQ2DPK	equivalent	OTH	Aftermarket bus connection kit BTQDGE (seller cross-ref to GEA TQ2DPK)	EDH-OTH-00039	1115
TQ3HTK	primary	GEA	GE multiwire branch handle tie kit, three single-pole Q-Line breakers	EDH-GEA-00621	1084
TQ4HTK	primary	GEA	GE multiwire branch handle tie kit, four single-pole Q-Line breakers	EDH-GEA-00622	1085
TQBS1	primary	GEA	GE breaker mounting screw for THQB bolt-on Q-Line breakers	EDH-GEA-00623	1073
TQBSI	primary	GEA	GE TQBSI mounting screws for THQB (24 screws)	EDH-GEA-00719	1464
TQBSI7	alias	GEA	GE TQBSI mounting screws for THQB (24 screws)	EDH-GEA-00719	1464
TQCBMPA1	primary	GEA	GE THQC back mounting plate (screw type) TQCBMPA1, 1-pole	EDH-GEA-00783	1390
TQCBMPA10	primary	GEA	GE THQC back mounting plate (screw type) TQCBMPA10, 10-pole	EDH-GEA-00786	1390
TQCBMPA2	primary	GEA	GE THQC back mounting plate (screw type) TQCBMPA2, 2-pole	EDH-GEA-00784	1391
TQCBMPA3	primary	GEA	GE THQC back mounting plate (screw type) TQCBMPA3, 3-pole	EDH-GEA-00785	1391
TQCFMP1	primary	GEA	GE THQC front-mounting plate TQCFMP1, 1-pole	EDH-GEA-00791	1391
TQCFMP11	alias	GEA	GE THQC front-mounting plate TQCFMP1, 1-pole	EDH-GEA-00791	1391
TQCFMP2	primary	GEA	GE THQC front-mounting plate TQCFMP2, 2-pole	EDH-GEA-00792	1392
TQCFMP21	alias	GEA	GE THQC front-mounting plate TQCFMP2, 2-pole	EDH-GEA-00792	1392
TQCFMP3	primary	GEA	GE THQC front-mounting plate TQCFMP3, 3-pole	EDH-GEA-00793	1392
TQCFMP31	alias	GEA	GE THQC front-mounting plate TQCFMP3, 3-pole	EDH-GEA-00793	1392
TQCFMP4	primary	GEA	GE THQC front-mounting plate TQCFMP4, 4-pole	EDH-GEA-00794	1392
TQCFMP41	alias	GEA	GE THQC front-mounting plate TQCFMP4, 4-pole	EDH-GEA-00794	1392
TQCGFBMPA1	primary	GEA	GE THQC/THQC-GF snap-in back mounting plate TQCGFBMPA1, 1-pole	EDH-GEA-00787	1393

Number	Type	Mfr	Description	Catalogue ID	Pg
TQCGFBMPA10	primary	GEA	GE THQC/THQC-GF snap-in back mounting plate TQCGFBMPA10, 10-pole	EDH-GEA-00790	1393
TQCGFBMPA2	primary	GEA	GE THQC/THQC-GF snap-in back mounting plate TQCGFBMPA2, 2-pole	EDH-GEA-00788	1393
TQCGFBMPA3	primary	GEA	GE THQC/THQC-GF snap-in back mounting plate TQCGFBMPA3, 3-pole	EDH-GEA-00789	1393
TQD1K	alias	OTH	Aftermarket bus connection kit BTQDGE (seller cross-ref to GEA TQ2DPK)	EDH-OTH-00039	1115
TQDFM1	primary	GEA	A-Series 2-3 pole TQD mechanical interlock	EDH-GEA-00088	1081
TQDLPDL1	primary	GEA	GE padlocking device for TQDL breakers	EDH-GEA-00617	1090
TQDPLD1	primary	GEA	GE padlocking device for TQD/THQD Q-Line 225 A breakers	EDH-GEA-00615	1090
TQHT1	primary	GEA	GE snap-on handle tie, trip indicating, Q-Line	EDH-GEA-00619	1085
TQLFP1	primary	GEA	A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY	EDH-GEA-00041	1070
TQPDLD2	primary	GEA	GE padlocking device for TQD, EUSERC approved (factory installed only)	EDH-GEA-00616	1091
TQPL	primary	GEA	GE non-padlocking handle lock for THQP and Q-Line GF breakers	EDH-GEA-00614	1086
TQPLD1	primary	GEA	GE breaker handle padlocking device for TQC breakers	EDH-GEA-00574	1091
TQPPL	primary	GEA	GE padlocking device for THQP breakers	EDH-GEA-00618	1092
TS33LD	primary	EAT	Series C K-frame terminal shield 3-pole, load	EDH-EAT-00641	597
TS33LN	primary	EAT	Series C K-frame terminal shield 2/3-pole, line	EDH-EAT-00639	598
TS34LN	primary	EAT	Series C K-frame terminal shield 4-pole, line	EDH-EAT-00640	598
TSLF3	primary	SIE	VL CG/DG/FG extended terminal cover (TSL), 3-pole	EDH-SIE-00542	1826
TSLF4	primary	SIE	VL CG/DG/FG extended terminal cover (TSL), 4-pole	EDH-SIE-00543	1827
TSLL3	primary	SIE	VL JG/LG terminal shield long (TSL), 3-pole	EDH-SIE-00544	1827
TSLL4	primary	SIE	VL JG/LG terminal shield long (TSL), 4-pole	EDH-SIE-00545	1827
TSLM3	primary	SIE	VL MG terminal shield long (TSL), 3-pole	EDH-SIE-00548	1827
TSLM3M	primary	SIE	VL MG terminal shield long, M variant, 3-pole	EDH-SIE-00552	1828
TSLM4	primary	SIE	VL MG terminal shield long (TSL), 4-pole	EDH-SIE-00549	1828
TSLM4M	primary	SIE	VL MG terminal shield long, M variant, 4-pole	EDH-SIE-00553	1828
TSSG3A	primary	SIE	Siemens TSSG3A terminal shield, HGG/LGG/NGG 3-pole	EDH-SIE-00251	1752
TSSL3	primary	SIE	VL JG/LG terminal shield short (TSS), 3-pole	EDH-SIE-00546	1828
TSSL4	primary	SIE	VL JG/LG terminal shield short (TSS), 4-pole	EDH-SIE-00547	1829
TSSM3	primary	SIE	VL MG terminal shield short (TSS), 3-pole	EDH-SIE-00550	1829
TSSM4	primary	SIE	VL MG terminal shield short (TSS), 4-pole	EDH-SIE-00551	1829
TVS12RMU	primary	SQD	Surgelogic TVSS remote monitor TVS12RMU	EDH-SQD-00318	941
TW1DG20	primary	SIE	VL DG box/wrap-around terminal 20 (single)	EDH-SIE-00603	1816
TW1FG350	primary	SIE	VL FG wrap-around terminal 350 (single)	EDH-SIE-00611	1816
TW1JG600	primary	SIE	VL JG wrap-around terminal 600, single	EDH-SIE-00619	1816
UBIF015N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF015N (FPE NC One Pole Thin Seri	EDH-OTH-00072	1895
UBIF020N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF020N (FPE NC One Pole Thin Seri	EDH-OTH-00073	1895
UBIF0215N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF0215N (FPE NC Two Pole Thin Ser	EDH-OTH-00077	1896
UBIF0220N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF0220N (FPE NC Two Pole Thin Ser	EDH-OTH-00078	1896
UBIF0230N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF0230N (FPE NC Two Pole Thin Ser	EDH-OTH-00079	1897
UBIF0240N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF0240N (FPE NC Two Pole Thin Ser	EDH-OTH-00080	1897
UBIF0250N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF0250N (FPE NC Two Pole Thin Ser	EDH-OTH-00081	1898
UBIF030N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF030N (FPE NC One Pole Thin Seri	EDH-OTH-00074	1898

Number	Type	Mfr	Description	Catalogue ID	Pg
UBIF040N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF040N (FPE NC One Pole Thin Seri	EDH-OTH-00075	1899
UBIF050N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF050N (FPE NC One Pole Thin Seri	EDH-OTH-00076	1899
UBIF15N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF15N (FPE NA One Pole Thick Seri	EDH-OTH-00082	1900
UBIF20N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF20N (FPE NA One Pole Thick Seri	EDH-OTH-00083	1900
UBIF215N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF215N (FPE NA Two Pole Thick Ser	EDH-OTH-00087	1901
UBIF220N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF220N (FPE NA Two Pole Thick Ser	EDH-OTH-00088	1901
UBIF230N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF230N (FPE NA Two Pole Thick Ser	EDH-OTH-00089	1902
UBIF240N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF240N (FPE NA Two Pole Thick Ser	EDH-OTH-00090	1902
UBIF250N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF250N (FPE NA Two Pole Thick Ser	EDH-OTH-00091	1903
UBIF260N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF260N (FPE NA Two Pole Thick Ser	EDH-OTH-00092	1903
UBIF270N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF270N (FPE NA Two Pole Thick Ser	EDH-OTH-00093	1904
UBIF30N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF30N (FPE NA One Pole Thick Seri	EDH-OTH-00084	1904
UBIF340N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF340N (number known only from re	EDH-OTH-00130	1904
UBIF380NB	primary	OTH	Connecticut Electric UBI replacement breaker UBIF380NB (number known only from r	EDH-OTH-00131	1904
UBIF40N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF40N (FPE NA One Pole Thick Seri	EDH-OTH-00085	1905
UBIF50N	primary	OTH	Connecticut Electric UBI replacement breaker UBIF50N (FPE NA One Pole Thick Seri	EDH-OTH-00086	1905
UBIFPE1003	primary	OTH	Connecticut Electric UBI replacement breaker UBIFPE1003 (number known only from	EDH-OTH-00132	1905
UBIP115	primary	OTH	Connecticut Electric UBI replacement breaker UBIP115 (Pushmatic One Pole Series,	EDH-OTH-00094	1604
UBIP120	primary	OTH	Connecticut Electric UBI replacement breaker UBIP120 (Pushmatic One Pole Series,	EDH-OTH-00095	1604
UBIP130	primary	OTH	Connecticut Electric UBI replacement breaker UBIP130 (Pushmatic One Pole Series,	EDH-OTH-00096	1605
UBIP1515	primary	OTH	Connecticut Electric UBI replacement breaker UBIP1515 (Pushmatic Twin Pole Serie	EDH-OTH-00105	1605
UBIP1520	primary	OTH	Connecticut Electric UBI replacement breaker UBIP1520 (Pushmatic Twin Pole Serie	EDH-OTH-00106	1606
UBIP2020	primary	OTH	Connecticut Electric UBI replacement breaker UBIP2020 (Pushmatic Twin Pole Serie	EDH-OTH-00107	1606
UBIP2100	primary	OTH	Connecticut Electric UBI replacement breaker UBIP2100 (Pushmatic Two Pole Series	EDH-OTH-00104	1607
UBIP215	primary	OTH	Connecticut Electric UBI replacement breaker UBIP215 (Pushmatic Two Pole Series,	EDH-OTH-00097	1607
UBIP220	primary	OTH	Connecticut Electric UBI replacement breaker UBIP220 (Pushmatic Two Pole Series,	EDH-OTH-00098	1608
UBIP230	primary	OTH	Connecticut Electric UBI replacement breaker UBIP230 (Pushmatic Two Pole Series,	EDH-OTH-00099	1608
UBIP240	primary	OTH	Connecticut Electric UBI replacement breaker UBIP240 (Pushmatic Two Pole Series,	EDH-OTH-00100	1609
UBIP250	primary	OTH	Connecticut Electric UBI replacement breaker UBIP250 (Pushmatic Two Pole Series,	EDH-OTH-00101	1609
UBIP260	primary	OTH	Connecticut Electric UBI replacement breaker UBIP260 (Pushmatic Two Pole Series,	EDH-OTH-00102	1610

Number	Type	Mfr	Description	Catalogue ID	Pg
UBIP270	primary	OTH	Connecticut Electric UBI replacement breaker UBIP270 (Pushmatic Two Pole Series,	EDH-OTH-00103	1610
UBIZ0220	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ0220 (Zinsco RC Series - RC3820	EDH-OTH-00125	1879
UBIZ0230	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ0230 (Zinsco RC Series - RC3830	EDH-OTH-00126	1879
UBIZ0240	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ0240 (Zinsco RC Series - RC3840	EDH-OTH-00127	1880
UBIZ0250	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ0250 (Zinsco RC Series - RC3850	EDH-OTH-00128	1880
UBIZ0260	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ0260 (Zinsco RC Series - RC3860	EDH-OTH-00129	1881
UBIZ15	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ15 (Zinsco Q Series - Q15, 15 A	EDH-OTH-00108	1881
UBIZ1515	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ1515 (Zinsco R Series - R3815,	EDH-OTH-00121	1882
UBIZ1520	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ1520 (Zinsco R Series - R381520	EDH-OTH-00122	1882
UBIZ20	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ20 (Zinsco Q Series - Q20, 20 A	EDH-OTH-00109	1883
UBIZ2020	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ2020 (Zinsco R Series - R3820,	EDH-OTH-00123	1883
UBIZ2100	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ2100 (Zinsco QC Series - QCAL10	EDH-OTH-00119	1884
UBIZ2125	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ2125 (Zinsco QC Series - QCAL12	EDH-OTH-00120	1884
UBIZ220	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ220 (Zinsco QC Series - QC20, 2	EDH-OTH-00111	1885
UBIZ230	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ230 (Zinsco QC Series - QC30, 3	EDH-OTH-00112	1885
UBIZ240	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ240 (Zinsco QC Series - QC40, 4	EDH-OTH-00113	1886
UBIZ250	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ250 (Zinsco QC Series - QC50, 5	EDH-OTH-00114	1886
UBIZ260	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ260 (Zinsco QC Series - QCAL60,	EDH-OTH-00115	1887
UBIZ270	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ270 (Zinsco QC Series - QCAL70,	EDH-OTH-00116	1887
UBIZ280	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ280 (Zinsco QC Series - QCAL80,	EDH-OTH-00117	1888
UBIZ290	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ290 (Zinsco QC Series - QCAL90,	EDH-OTH-00118	1888
UBIZ30	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ30 (Zinsco Q Series - Q30, 30 A	EDH-OTH-00110	1889
UBIZ3030	primary	OTH	Connecticut Electric UBI replacement breaker UBIZ3030 (Zinsco R Series - R3830,	EDH-OTH-00124	1889
UBIZRBK12	primary	ZIN	Connecticut Electric / UBI 125 A Type RBK replacement buss bar kit for Zinsco lo	EDH-ZIN-00025	1878
UPC 621037246102	alias	EAT	PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)	EDH-EAT-00296	480
UPC 782113099170	alias	EAT	Type BR loadcenter add-on neutral/ground lug (NL300)	EDH-EAT-00457	27
UPC 782113099439	alias	EAT	Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)	EDH-EAT-00456	28
UPC 782113526898	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00489	581
UPC 782113526904	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00488	576
UPC 782113526911	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00490	588
UPC 782113527369	alias	EAT	Series G JG end cap kit, 3-pole, imperial	EDH-EAT-00589	680
UPC 782113527383	alias	EAT	Series G JG end cap kit, 3-pole, metric	EDH-EAT-00587	681
UPC 782113527390	alias	EAT	Series G JG end cap kit, 4-pole, metric	EDH-EAT-00588	682
UPC 782113527406	alias	EAT	Series G JG-frame interphase barriers 3-pole (package of 2)	EDH-EAT-00568	676

Number	Type	Mfr	Description	Catalogue ID	Pg
UPC 782113527413	alias	EAT	Series G JG-frame interphase barriers 4-pole (package of 2)	EDH-EAT-00569	677
UPC 782113683874	alias	EAT	Series G EG end cap kit, 4-pole, metric	EDH-EAT-00583	672
UPC 782113683881	alias	EAT	Series G EG end cap kit, 4-pole, imperial	EDH-EAT-00586	671
UPC 782113683911	alias	EAT	Series G EG-frame line/load terminals, 125/160 A, Cu/Al	EDH-EAT-00538	662
UPC 782113924762	alias	EAT	Series G JG-frame line/load terminal, 250 A, Cu/Al	EDH-EAT-00542	674
UPC 782113928739	alias	EAT	Series G JG-frame terminal shield IP30 2/3-pole	EDH-EAT-00566	678
UPC 782113928746	alias	EAT	Series G JG-frame terminal shield IP30 4-pole	EDH-EAT-00567	679
UPC 782114291818	alias	EAT	Series C F-frame end cap kit, 2-pole, 10-32	EDH-EAT-00591	551
UPC 782114291825	alias	EAT	Series C F-frame end cap kit, 2-pole, M5	EDH-EAT-00592	553
UPC 782114291832	alias	EAT	Series C F-frame end cap kit, 3-pole, 10-32	EDH-EAT-00593	551
UPC 782114291849	alias	EAT	Series C F-frame end cap kit, 3-pole, M5	EDH-EAT-00594	552
UPC 782114291863	alias	EAT	Series C F-frame end cap kit, 4-pole, M5	EDH-EAT-00596	554
UPC 782114291870	alias	EAT	Series C J-frame end cap kit, 3-pole, .312-18	EDH-EAT-00597	571
UPC 782114291887	alias	EAT	Series C J-frame end cap kit, 3-pole, M8	EDH-EAT-00598	572
UPC 782114291900	alias	EAT	Series C J-frame end cap kit, 4-pole, M8	EDH-EAT-00600	573
UPC 782114373231	alias	EAT	Series C F-frame control wire terminal kit	EDH-EAT-00618	550
UPC 782114380093	alias	EAT	Series C M-frame terminal with control wire termination (TA800MA2)	EDH-EAT-00520	632
UPC 782114380109	alias	EAT	Series C M-frame terminal with control wire termination (TA801MA)	EDH-EAT-00521	633
UPC 782114795194	alias	EAT	PRL4F fusible switch connector kit KPRL4W11X	EDH-EAT-00338	424
UPC 782114795941	alias	EAT	PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)	EDH-EAT-00328	441
UPC 782114795996	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4KDS (DK, KD, KDB, HKD, KDC 2-/3-pole)	EDH-EAT-00312	447
UPC 782114796030	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4JDS (JD, JDB, HJD, JDC 2-/3-pole)	EDH-EAT-00309	445
UPC 782114796078	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))	EDH-EAT-00321	458
UPC 782114796115	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4JDT (JD, JDB, HJD, JDC 2-/3-pole)	EDH-EAT-00310	446
UPC 782114796184	alias	EAT	PRL4F fusible switch connector kit KPRL44X	EDH-EAT-00331	421
UPC 782114796191	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])	EDH-EAT-00314	450
UPC 782114796207	alias	EAT	PRL4F fusible switch connector kit KPRL45XS	EDH-EAT-00334	423
UPC 782114796214	alias	EAT	PRL4F fusible switch connector kit KPRL45X	EDH-EAT-00333	422
UPC 782114796412	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4KDT (DK, KD, KDB, HKD, KDC 2-/3-pole)	EDH-EAT-00313	448
UPC 782114798195	alias	EAT	PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)	EDH-EAT-00329	437
UPC 782114858813	alias	EAT	PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)	EDH-EAT-00330	452
UPC 782114858820	alias	EAT	PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)	EDH-EAT-00327	438
UPC 782114887257	alias	EAT	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00184	325
UPC 782114887271	alias	EAT	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00185	326
UPC 782114887295	alias	EAT	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00186	327
UPC 782114887301	alias	EAT	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00187	328
UPC 782114887318	alias	EAT	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00188	329
UPC 782114887332	alias	EAT	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00189	329
UPC 782114887349	alias	EAT	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00190	330
UPC 782114887363	alias	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00206	333
UPC 782114887370	alias	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00205	333

Number	Type	Mfr	Description	Catalogue ID	Pg
UPC 782114887387	alias	EAT	PRL3a horizontal 6-circuit GHB connector kit, 3-phase	EDH-EAT-00192	334
UPC 782114887400	alias	EAT	PRL3a horizontal 12-circuit GHB connector kit, 3-phase	EDH-EAT-00194	336
UPC 782114887417	alias	EAT	PRL3a horizontal 12-circuit GHB connector kit, 1-phase	EDH-EAT-00195	337
UPC 782114887424	alias	EAT	PRL3a horizontal 18-circuit GHB connector kit, 3-phase	EDH-EAT-00196	337
UPC 782114887431	alias	EAT	PRL3a horizontal 18-circuit GHB connector kit, 1-phase	EDH-EAT-00197	338
UPC 782114887448	alias	EAT	PRL3a horizontal 24-circuit GHB connector kit, 3-phase	EDH-EAT-00198	339
UPC 782114887462	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4CA (CA/CAH/HCA 2-pole (2X) or 3-pole (3X))	EDH-EAT-00308	434
UPC 782114887479	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4CKD (100% rated CKD/CHKD/CKDC 3-pole)	EDH-EAT-00322	435
UPC 782114887493	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4CND (100% rated CND/CHND/CNDC/NGS-C/NGH-C/	EDH-EAT-00324	436
UPC 782114887509	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4FBP (FCL, FB-P, FD/LFD 3-pole)	EDH-EAT-00311	439
UPC 782114887516	alias	EAT	PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)	EDH-EAT-00325	442
UPC 782114887523	alias	EAT	PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)	EDH-EAT-00326	443
UPC 782114887530	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4LAP (LA-P 3-pole)	EDH-EAT-00317	449
UPC 782114887547	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4LCL (LCL 3-pole)	EDH-EAT-00318	451
UPC 782114887554	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])	EDH-EAT-00316	455
UPC 782114887561	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4NBP (NB-P 3-pole)	EDH-EAT-00319	456
UPC 782114895153	alias	EAT	PRL4 three-pole fusible switch 200 A, 240 V, single (6X)	EDH-EAT-01207	492
UPC 782114895160	alias	EAT	PRL4 three-pole fusible switch 200 A, 600 V, single (6X)	EDH-EAT-01208	493
UPC 782114983669	alias	EAT	Series G EG-frame line/load terminals, 125 A, Cu/Al	EDH-EAT-00537	661
UPC 782114984185	alias	EAT	Series G EG-frame terminal shield IP30 3-pole (line terminal area)	EDH-EAT-00570	666
UPC 782116008780	alias	EAT	PRL4 three-pole fusible switch 200-200 A, 240 V, twin (6X)	EDH-EAT-01209	494
UPC 782116029594	alias	EAT	Series G JG-frame control wire terminal kit (package of 14	EDH-EAT-00575	683
UPC 782116102495	alias	EAT	Series G EG-frame line/load terminals, 160 A, Cu/Al	EDH-EAT-00539	663
UPC 782116122899	alias	EAT	Series G LG-frame terminal extension, 3-pole	EDH-EAT-00562	699
UPC 782116122905	alias	EAT	Series G LG-frame terminal extension, 4-pole	EDH-EAT-00563	700
UPC 782116122912	alias	EAT	Series G LG-frame terminal spreader, 3-pole	EDH-EAT-00564	697
UPC 782116122929	alias	EAT	Series G LG-frame terminal spreader, 4-pole	EDH-EAT-00565	698
UPC 782116125456	alias	EAT	Series G EG-frame multiwire connector	EDH-EAT-00577	660
UPC 782116130887	alias	EAT	Series G JG-frame multiwire connector	EDH-EAT-00579	672
UPC 782116130894	alias	EAT	Series G JG-frame multiwire connector	EDH-EAT-00580	673
UPC 782116157419	alias	EAT	Series G LG-frame end cap kit (metric nuts), 3-pole	EDH-EAT-00560	695
UPC 782116157426	alias	EAT	Series G LG-frame end cap kit (metric nuts), 4-pole	EDH-EAT-00561	696
UPC 782116165599	alias	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00543	686
UPC 782116165612	alias	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00545	684
UPC 782116165636	alias	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	EDH-EAT-00547	687
UPC 782116165643	alias	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	EDH-EAT-00548	690
UPC 782116165650	alias	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu	EDH-EAT-00549	685
UPC 782116165674	alias	EAT	Series G LG-frame line/load terminal, 400 A, Cu/Al	EDH-EAT-00551	692
UPC 782116165681	alias	EAT	Series G LG-frame line/load terminal, 400 A, Cu	EDH-EAT-00552	691
UPC 782116197941	alias	EAT	Series G LG-frame terminal cover, 3-pole	EDH-EAT-00558	693
UPC 782116197958	alias	EAT	Series G LG-frame terminal cover, 4-pole	EDH-EAT-00559	694
UPC 782116318490	alias	EAT	QUICKLAG / GB / GHB 1-pole filler (branch space filler)	EDH-EAT-00253	250
UPC 782116484348	alias	EAT	Series C F-frame end cap kit, 4-pole, 10-32	EDH-EAT-00595	552
UPC 782116654130	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4LG (LHH 3-pole)	EDH-EAT-00315	454
UPC 782116929740	alias	EAT	Series G LG-frame control wire terminal kit, 3P, aluminum	EDH-EAT-00554	688
UPC 782116929764	alias	EAT	Series G LG-frame control wire terminal kit, 3P, copper	EDH-EAT-00556	686
UPC 782116934195	alias	EAT	EZ Trim, unvented flush-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01013	257

Number	Type	Mfr	Description	Catalogue ID	Pg
UPC 782116934201	alias	EAT	EZ Trim, unvented surface-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01012	258
UPC 782116934218	alias	EAT	EZ Trim, unvented flush-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01025	259
UPC 782116934225	alias	EAT	EZ Trim, unvented surface-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01024	260
UPC 782116934232	alias	EAT	EZ Trim, unvented flush-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01037	261
UPC 782116934249	alias	EAT	EZ Trim, unvented surface-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01036	262
UPC 782116934256	alias	EAT	EZ Trim, unvented flush-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01043	262
UPC 782116934263	alias	EAT	EZ Trim, unvented surface-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01042	263
UPC 786676000499	alias	EAT	Type BR loadcenter padlockable handle lockoff for 1- (BRLW)	EDH-EAT-00459	31
UPC 786676001762	alias	EAT	Type BR loadcenter main and subfeed lug block (BRSF125)	EDH-EAT-00448	25
UPC 786676001779	alias	EAT	Type BR loadcenter main and subfeed lug block (BRSF150)	EDH-EAT-00449	26
UPC 786676001786	alias	EAT	Type BR loadcenter main and subfeed lug block (3BRSF150)	EDH-EAT-00451	24
UPC 786676375207	alias	EAT	Type BR loadcenter handle tie bar joining two adjacent single-pole type br break	EDH-EAT-00458	30
UPC 786676376228	alias	EAT	Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mo	EDH-EAT-00460	31
UPC 786676460101	alias	EAT	Type BR loadcenter main lugs (BRL200)	EDH-EAT-00453	23
UPC 786676461405	alias	EAT	Type BR loadcenter main and subfeed lug block (BRS225)	EDH-EAT-00450	25
UPC 786676461504	alias	EAT	Type BR loadcenter main and subfeed lug block (3BRS225)	EDH-EAT-00452	24
UPC 786676461603	alias	EAT	Type BR loadcenter filler plate (BRFP)	EDH-EAT-00454	29
UPC 786679004203	alias	EAT	PRL4F fusible switch connector kit KPRL4W9X	EDH-EAT-00337	426
UPC 786679013014	alias	EAT	Series C L-frame end cap kit, 3-pole, M8	EDH-EAT-00606	627
UPC 786679013021	alias	EAT	Series C L-frame end cap kit, 3-pole, .312-18	EDH-EAT-00605	626
UPC 786679022153	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00484	589
UPC 786679022542	alias	EAT	Series C G-frame terminal shield	EDH-EAT-00628	558
UPC 786679027011	alias	EAT	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	EDH-EAT-00462	524
UPC 786679045299	alias	EAT	Series C K-frame end cap kit, 3-pole, M8	EDH-EAT-00602	607
UPC 786679045312	alias	EAT	Series C K-frame end cap kit, 3-pole, .312-18	EDH-EAT-00601	605
UPC 786679064115	alias	EAT	Series C K-frame terminal kit with control wire termination (3TA401K)	EDH-EAT-00498	585
UPC 786679072943	alias	EAT	Series C F-frame control wire terminal kit	EDH-EAT-00617	548
UPC 786679094723	alias	EAT	Series C K-frame multiwire connector, 3 wires/terminal	EDH-EAT-00626	582
UPC 786679094730	alias	EAT	Series C K-frame multiwire connector, 6 wires/terminal	EDH-EAT-00627	583
UPC 786679096673	alias	EAT	Series C G-frame multiwire connector, 3 wires/terminal	EDH-EAT-00620	556
UPC 786679096680	alias	EAT	Series C G-frame multiwire connector, 6 wires/terminal	EDH-EAT-00621	557
UPC 786679106792	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00486	586
UPC 786679106808	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00485	579
UPC 786679106815	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00487	590
UPC 786679107713	alias	EAT	Series C K-frame end cap kit, 4-pole, M8	EDH-EAT-00604	608
UPC 786679107720	alias	EAT	Series C K-frame end cap kit, 4-pole, .312-18	EDH-EAT-00603	606
UPC 786679108017	alias	EAT	Series G EG end cap kit, 3-pole, imperial	EDH-EAT-00585	669
UPC 786679108031	alias	EAT	Series G EG end cap kit, 3-pole, metric	EDH-EAT-00582	670
UPC 786679108147	alias	EAT	Series G EG-frame interphase barriers (package of 12 priced individually)	EDH-EAT-00572	667
UPC 786679110201	alias	EAT	Series C F-frame keeper nut (10-32, line or load end)	EDH-EAT-00609	544
UPC 786679114278	alias	EAT	Series C interphase barrier (J, K)	EDH-EAT-00648	566
UPC 786679117477	alias	EAT	Series G EG-frame terminal end cover (gas barrier) 0.25 in conductor opening	EDH-EAT-00573	665
UPC 786679117484	alias	EAT	Series G EG-frame terminal end cover (gas barrier) 0.41 in conductor opening	EDH-EAT-00574	665

Number	Type	Mfr	Description	Catalogue ID	Pg
UPC 786679118924	alias	EAT	Series C F-frame line/load terminals, 225 A, Cu only (pkg of 3)	EDH-EAT-00468	526
UPC 786679149416	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00475	582
UPC 786679149430	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00480	580
UPC 786679161173	alias	EAT	Series C R-frame copper rear connector	EDH-EAT-00533	658
UPC 786679161456	alias	EAT	Series C K-frame panelboard connecting strap, outside pole, 3.50 in, 400 A	EDH-EAT-00692	595
UPC 786679161487	alias	EAT	TAD3 adapter kit - KD breaker onto existing Westinghouse LB-frame connectors	EDH-EAT-00365	488
UPC 786679161517	alias	EAT	Series C K-frame rear connecting stud, 400 A short stud, panel .50-.75 in	EDH-EAT-00659	603
UPC 786679161524	alias	EAT	Series C K-frame rear connecting stud, 400 A long stud, panel .50-.75 in	EDH-EAT-00662	603
UPC 786679162446	alias	EAT	Series C L-frame terminal with control wire termination (TA602LD)	EDH-EAT-00509	619
UPC 786679162453	alias	EAT	Series C L-frame terminal with control wire termination (T602LD)	EDH-EAT-00513	616
UPC 786679162477	alias	EAT	Series C L-frame terminal with control wire termination (3TA603LDK)	EDH-EAT-00511	613
UPC 786679166987	alias	EAT	Series C N-frame line/load terminal, 1200 A, Cu	EDH-EAT-00528	644
UPC 786679166994	alias	EAT	Series G NG-frame line/load terminal, 1250 A, Cu (metric)	EDH-EAT-00529	700
UPC 786679200605	alias	EAT	Series C J/K-frame control wire terminal kit	EDH-EAT-00619	570
UPC 786679222409	alias	EAT	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	EDH-EAT-00463	530
UPC 786679225424	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00482	578
UPC 786679225509	alias	EAT	Series C interphase barrier (N; NG)	EDH-EAT-00650	651
UPC 786679225622	alias	EAT	Series C R-frame copper rear connector	EDH-EAT-00534	658
UPC 786679251553	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00476	588
UPC 786679255100	alias	EAT	Series C interphase barrier (L, M)	EDH-EAT-00649	623
UPC 786679265703	alias	EAT	Series C K-frame keeper nut (.375-16, line end)	EDH-EAT-00611	599
UPC 786679265710	alias	EAT	Series C K-frame keeper nut (M8, line end)	EDH-EAT-00613	599
UPC 786679265727	alias	EAT	Series C K-frame keeper nut (.375-16, load end)	EDH-EAT-00612	600
UPC 786679265734	alias	EAT	Series C K-frame keeper nut (M8, load end)	EDH-EAT-00614	601
UPC 786679266113	alias	EAT	Series C F-frame keeper nut (M5, line or load end)	EDH-EAT-00610	545
UPC 786679304822	alias	EAT	Series C interphase barrier (F)	EDH-EAT-00647	542
UPC 786679305072	alias	EAT	Series C J-frame panelboard connecting strap, center pole, 3.50 in, 250 A	EDH-EAT-00689	563
UPC 786679305287	alias	EAT	Series C F-frame rear connecting stud, 225 A short stud (110-225 A breakers)	EDH-EAT-00654	546
UPC 786679410400	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00479	575
UPC 786679410417	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00474	577
UPC 786679420430	alias	EAT	Series C M-frame line/load terminal, 600 A, Cu	EDH-EAT-00517	629
UPC 786679420546	alias	EAT	Series C R-frame line/load terminal, 1600 A, Cu	EDH-EAT-00531	655
UPC 786679420553	alias	EAT	Series C R-frame line/load terminal, 1600 A, Cu/Al	EDH-EAT-00530	656
UPC 786679420683	alias	EAT	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	EDH-EAT-00465	527
UPC 786679420812	alias	EAT	Series C N-frame line/load terminal, 700 A, Cu	EDH-EAT-00526	645
UPC 786679421109	alias	EAT	Series C M-frame line/load terminal, 800 A, Cu	EDH-EAT-00518	629
UPC 786679422458	alias	EAT	Series C K-frame line/load terminal , 225 A, Cu/Al	EDH-EAT-00472	592
UPC 786679422465	alias	EAT	Series C K-frame line/load terminal , 350 A, Cu/Al	EDH-EAT-00473	593
UPC 786679423530	alias	EAT	Series C L-frame line/load terminal, 450 A, Cu/Al	EDH-EAT-00503	617
UPC 786679424865	alias	EAT	Series C M-frame line/load terminal, 600 A, Cu/Al	EDH-EAT-00514	630
UPC 786679424896	alias	EAT	Series C N-frame line/load terminal, 700 A, Cu/Al	EDH-EAT-00522	648
UPC 786679487013	alias	EAT	Series C N-frame rear connecting stud (800 A)	EDH-EAT-00674	654
UPC 786679487136	alias	EAT	Series C N-frame rear connecting stud (1200 A)	EDH-EAT-00678	653
UPC 786679487143	alias	EAT	Series C N-frame rear connecting stud (1200 A)	EDH-EAT-00677	653
UPC 786679504321	alias	EAT	Series C K-frame terminal shield 2/3-pole, line	EDH-EAT-00639	598

Number	Type	Mfr	Description	Catalogue ID	Pg
UPC 786679508909	alias	EAT	Series C L/M-frame rear connecting stud (L: stud length 5.47 in)	EDH-EAT-00664	624
UPC 786679508916	alias	EAT	Series C L/M-frame rear connecting stud (L: 7.97 in)	EDH-EAT-00665	624
UPC 786679508923	alias	EAT	Series C L/M-frame rear connecting stud (L: 10.47 in)	EDH-EAT-00666	625
UPC 786679508947	alias	EAT	Series C M-frame rear connecting stud (800 A)	EDH-EAT-00672	641
UPC 786679509524	alias	EAT	Series C M-frame rear connecting stud (800 A)	EDH-EAT-00671	641
UPC 786679511909	alias	EAT	Series C K-frame line/load terminal , 350 A, Cu	EDH-EAT-00478	592
UPC 786679511923	alias	EAT	Series C J-frame line/load terminal, 250 A, Cu only (optional)	EDH-EAT-00471	560
UPC 786679511930; EAN; 4015081502813	alias	EAT	Series C K-frame line/load terminal , 225 A, Cu	EDH-EAT-00477	591
UPC 786679511961	alias	EAT	Series C J-frame line/load terminal, 250 A, Cu/Al (standard)	EDH-EAT-00470	561
UPC 786679518922	alias	EAT	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 150 A	EDH-EAT-00688	534
UPC 786679558966	alias	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00500	609
UPC 786679558980	alias	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00501	611
UPC 786679559123	alias	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00507	614
UPC 786679559765	alias	EAT	Series C J-frame plug nut (M6)	EDH-EAT-00616	568
UPC 786679565001	alias	EAT	Series C R-frame line/load terminal, 2000 A, Cu/Al	EDH-EAT-00532	657
UPC 786679565056	alias	EAT	Series C R-frame copper rear connector	EDH-EAT-00535	659
UPC 786679572054	alias	EAT	Series C K-frame terminal shield 3-pole, load	EDH-EAT-00641	597
UPC 786679612224	alias	EAT	Series C N-frame line/load terminal, 1000 A, Cu	EDH-EAT-00527	643
UPC 786679612286	alias	EAT	Series C N-frame line/load terminal, 1000 A, Cu/Al	EDH-EAT-00523	645
UPC 786679612316	alias	EAT	Series C N-frame line/load terminal, 1200 A, Cu/Al	EDH-EAT-00524	646
UPC 786679612347	alias	EAT	Series C N-frame line/load terminal, 1200 A, Cu/Al	EDH-EAT-00525	647
UPC 786679651520	alias	EAT	PRL4 three-pole fusible switch 30-30 A, 600 V, twin (4X)	EDH-EAT-01202	503
UPC 786679651544	alias	EAT	PRL4 three-pole fusible switch 60-60 A, 600 V, twin (4X)	EDH-EAT-01204	504
UPC 786679651568	alias	EAT	PRL4 three-pole fusible switch 100-100 A, 240 V, twin (4X)	EDH-EAT-01205	502
UPC 786679651612	alias	EAT	PRL4 three-pole fusible switch 60-60 A, 240 V, twin (4X)	EDH-EAT-01203	501
UPC 786679651667	alias	EAT	PRL4 three-pole fusible switch 100-100 A, 600 V, twin (5X)	EDH-EAT-01206	505
UPC 786679679272	alias	EAT	Series C M-frame line/load terminal, 800 A, Cu/Al	EDH-EAT-00515	631
UPC 786679679289	alias	EAT	Series C M-frame line/load terminal, 800 A, Cu/Al	EDH-EAT-00516	632
UPC 786679730706	alias	EAT	Series C K-frame rear connecting stud, 400 A short stud, panel .75-1 in	EDH-EAT-00658	602
UPC 786679761304	alias	EAT	Series C J-frame plug nut (.250-20)	EDH-EAT-00615	567
UPC 786679770917	alias	EAT	Series C F-frame rear connecting stud, 100 A short stud (15-100 A breakers)	EDH-EAT-00652	547
UPC 786679770924	alias	EAT	Series C F-frame rear connecting stud, 100 A long stud	EDH-EAT-00653	548
UPC 786679783115	alias	EAT	PRL4 three-pole fusible switch 800 A, 600 V, single (11X)	EDH-EAT-01216	498
UPC 786679783917	alias	EAT	PRL4 three-pole fusible switch 600 A, 240 V, single (11X)	EDH-EAT-01213	495
UPC 786679783924	alias	EAT	PRL4 three-pole fusible switch 600 A, 600 V, single (11X)	EDH-EAT-01214	497
UPC 786679801871	alias	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00505	610
UPC 786679801888	alias	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00506	612
UPC 786679803462	alias	EAT	Series C F-frame terminal end cover, 0.41 opening	EDH-EAT-00646	543
UPC 786679825389	alias	EAT	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 150 A	EDH-EAT-00687	533
UPC 786679825440	alias	EAT	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 100 A	EDH-EAT-00686	535
UPC 786679831120	alias	EAT	Series C K-frame panelboard strap mounting bracket	EDH-EAT-00703	596
UPC 786679831144	alias	EAT	Series C L-frame panelboard strap mounting bracket	EDH-EAT-00704	622
UPC 786679831205	alias	EAT	Series C J-frame panelboard connecting strap, outside pole, 3.50 in, 250 A	EDH-EAT-00690	563
UPC 786679836064	alias	EAT	Series C K-frame panelboard connecting strap, center pole, 3.50 in, 400 A	EDH-EAT-00691	596
UPC 786679836088	alias	EAT	Series C M-frame panelboard connecting strap, short, 3.50 in, 800 A	EDH-EAT-00695	635

Number	Type	Mfr	Description	Catalogue ID	Pg
UPC 786679836101	alias	EAT	Series C M-frame panelboard connecting strap, medium, 3.50 in, 800 A	EDH-EAT-00696	636
UPC 786679836125	alias	EAT	Series C M-frame panelboard connecting strap, long, 3.50 in, 800 A	EDH-EAT-00697	637
UPC 786679836149	alias	EAT	Series C M/N-frame panelboard strap mounting bracket	EDH-EAT-00705	638
UPC 786679836323	alias	EAT	Series C F-frame rear connecting stud, 225 A long stud	EDH-EAT-00655	546
UPC 786679838662	alias	EAT	Series C N-frame panelboard connecting strap, short, 3.50 in, 1200 A	EDH-EAT-00698	649
UPC 786679838686	alias	EAT	Series C N-frame panelboard connecting strap, medium, 3.50 in, 1200 A	EDH-EAT-00699	650
UPC 786679838709	alias	EAT	Series C N-frame panelboard connecting strap, long, 3.50 in, 1200 A	EDH-EAT-00700	651
UPC 786679838761	alias	EAT	Series C L-frame panelboard connecting strap, outside pole, 600 A	EDH-EAT-00694	620
UPC 786679840504	alias	EAT	Series C F-frame line/load terminals, 200 A, Cu only (pkg of 3)	EDH-EAT-00466	525
UPC 786679840528	alias	EAT	Series C F-frame panelboard strap mounting bracket	EDH-EAT-00702	538
UPC 786679840542	alias	EAT	Series C F-frame panelboard strap mounting bracket	EDH-EAT-00701	539
UPC 786679841365	alias	EAT	Series C F-frame panelboard connecting strap, center pole, 2.75 in bus spacing,	EDH-EAT-00679	535
UPC 786679841488	alias	EAT	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 100 A	EDH-EAT-00680	536
UPC 786679843802	alias	EAT	Series C F-frame multiwire connector, 3 wires/terminal	EDH-EAT-00622	528
UPC 786679843826	alias	EAT	Series C F-frame multiwire connector, 6 wires/terminal	EDH-EAT-00623	528
UPC 786679843840	alias	EAT	Series C J-frame multiwire connector, 3 wires/terminal	EDH-EAT-00624	559
UPC 786679843864	alias	EAT	Series C J-frame multiwire connector, 6 wires/terminal	EDH-EAT-00625	560
UPC 786679844250	alias	EAT	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	EDH-EAT-00467	531
UPC 786679852057	alias	EAT	Series C L-frame line/load terminal, 600 A, Cu	EDH-EAT-00508	615
UPC 786679852064	alias	EAT	Series C L-frame line/load terminal, 500 A, Cu/Al	EDH-EAT-00504	618
UPC 786679884010	alias	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00483	584
UPC 786679913253	alias	EAT	PRL4 three-pole fusible switch 400 A, 240 V, single (9X)	EDH-EAT-01211	494
UPC 786679913659	alias	EAT	PRL4 three-pole fusible switch 400 A, 600 V, single (9X)	EDH-EAT-01212	496
UPC 786679913949	alias	EAT	PRL4 three-pole fusible switch 1200 A, 600 V, single (15X)	EDH-EAT-01218	499
UPC 786679914205	alias	EAT	PRL4 three-pole fusible switch 30-30 A, 240 V, twin (4X)	EDH-EAT-01201	500
UPC 786679970560	alias	EAT	Series C F-frame line/load terminals, 20 (EHD) A, Cu/Al (pkg of 3)	EDH-EAT-00461	526
UPC 786679970584	alias	EAT	Series C F-frame line/load terminals, 150 A, Cu/Al, Q18	EDH-EAT-00469	530
UPC 786679970591	alias	EAT	Series C F-frame line/load terminals, 50 A, Cu/Al (pkg of 3)	EDH-EAT-00464	532
UPC 786679971116	alias	EAT	Series C L-frame terminal shield	EDH-EAT-00642	622
UPC 786679971123	alias	EAT	Series C M-frame terminal shield	EDH-EAT-00643	639
UPC 786679973189	alias	EAT	Series C L-frame panelboard connecting strap, center pole, 600 A	EDH-EAT-00693	621
UPC 786685100852	alias	EAT	Series C N-frame terminal shield	EDH-EAT-00644	652
UPC 786685211022	alias	EAT	Cutler-Hammer compact BR retrofit kit RAABR12L125	EDH-EAT-00762	39
UPC 786685211046	alias	EAT	Cutler-Hammer compact BR retrofit kit RAABR12L125A	EDH-EAT-00763	40
UPC 786685211060	alias	EAT	Eaton CH retrofit stocking kit RACH24L125I	EDH-EAT-01232	32
UPC 786685211114	alias	EAT	Eaton CH retrofit stocking kit RDCH42B200I	EDH-EAT-01233	33
UPC 786685211169	alias	EAT	Eaton CH retrofit stocking kit RDCHFRAME	EDH-EAT-01234	36
UPC 786685220000	alias	EAT	Series G EG end cap kit, 2-pole, metric	EDH-EAT-00581	669
UPC 786685220024	alias	EAT	Series G EG end cap kit, 2-pole, imperial	EDH-EAT-00584	668
UPC 786685242545	alias	EAT	Cutler-Hammer BR retrofit kit RABR20L125	EDH-EAT-00744	43
UPC 786685291918	alias	EAT	Eaton BR retrofit stocking kit RTBR12L125R	EDH-EAT-01235	35
UPC 786685291925	alias	EAT	Eaton BR retrofit stocking kit RTBR10B100Q	EDH-EAT-01236	34
UPC 786685316765	alias	EAT	Eaton integrated panelboard SPD SPD050208Y2A	EDH-EAT-01225	292
UPC 786685317366	alias	EAT	Eaton integrated panelboard SPD SPD100208Y2A	EDH-EAT-01226	293
UPC 786685317397	alias	EAT	Eaton integrated panelboard SPD SPD100480Y2A	EDH-EAT-01224	293

Number	Type	Mfr	Description	Catalogue ID	Pg
UPC 786685318097	alias	EAT	Eaton integrated panelboard SPD SPD160480Y3A	EDH-EAT-01222	295
UPC 786685318394	alias	EAT	Eaton integrated panelboard SPD SPD200480Y3A	EDH-EAT-01223	295
UPC 786685322193	alias	EAT	Eaton integrated panelboard SPD SPD120480Y2C	EDH-EAT-01227	294
UPC 786685355412	alias	EAT	EZ Trim, unvented surface-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01048	264
UPC 786685355429	alias	EAT	EZ Trim, unvented flush-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01049	263
UPC 786685357867	alias	EAT	Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels	EDH-EAT-00403	253
UPC 786685399256	alias	EAT	EZ Trim, unvented surface-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01018	259
UPC 786685400044	alias	EAT	EZ Trim, unvented flush-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01019	258
UPC 786685406596	alias	EAT	Eaton integrated panelboard SPD SPD050230L2A	EDH-EAT-01220	292
UPC 786685406695	alias	EAT	Eaton integrated panelboard SPD SPD120230L3A	EDH-EAT-01221	294
UPC 786685466910	alias	EAT	Series G JG-frame line/load terminal, 250 A, Cu (standard)	EDH-EAT-00541	674
UPC 786689014650	alias	EAT	Service entrance barrier kit for LG and KD main breaker	EDH-EAT-00213	245
UPC 786689014674	alias	EAT	Service entrance barrier kit for FD main breaker	EDH-EAT-00215	243
UPC 786689014681	alias	EAT	Service entrance barrier kit for GHB main breaker	EDH-EAT-00216	243
UPC 786689040796	alias	EAT	PRL3a horizontal F-frame breaker connector kit (FD...)	EDH-EAT-00208	332
UPC 786689056261	alias	EAT	Eaton integrated panelboard SPD PDSPD2403SA2A-K3	EDH-EAT-01230	372
UPC 786689056292	alias	EAT	Eaton integrated panelboard SPD PDSPD4803SA2A-K3	EDH-EAT-01228	372
UPC 786689056346	alias	EAT	Eaton integrated panelboard SPD PDSPD4803SA2A-K4	EDH-EAT-01229	490
UPC 786689056391	alias	EAT	Eaton integrated panelboard SPD PDSPD2403SA2A-K4	EDH-EAT-01231	490
UPC 786689242091	alias	EAT	Service entrance barrier kit for PDG2 main breaker	EDH-EAT-00218	315
UPC 786689242107	alias	EAT	Service entrance barrier kit for PDF3/PDG3 main breaker	EDH-EAT-00217	316
UPC 786689242114	alias	EAT	Service entrance barrier for PD4 main breaker (PRL1X/2X/3X, PRL4X)	EDH-EAT-00790	317
UPC 786689242121	alias	EAT	Service entrance barrier for PD5 main breaker (PRL1X/2X/3X, PRL4X)	EDH-EAT-00789	318
UPC 786689242572	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	EDH-EAT-00300	460
UPC 786689242589	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	EDH-EAT-00301	461
UPC 786689242596	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X334S (PDG3 400 A frame, 3-pole, single mo	EDH-EAT-00302	462
UPC 786689242602	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X334T (PDG3 400 A frame, 3-pole, twin moun	EDH-EAT-00303	462
UPC 786689242619	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X336 (PDG3 600 A frame)	EDH-EAT-00304	463
UPC 786689242626	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)	EDH-EAT-00305	464
UPC 786689242633	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)	EDH-EAT-00306	465
UPC 786689242640	alias	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)	EDH-EAT-00200	343
UPC 786689242657	alias	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)	EDH-EAT-00202	344
UPC 786689242664	alias	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)	EDH-EAT-00201	341
UPC 786689242671	alias	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)	EDH-EAT-00203	342
UPC 786689346935	alias	EAT	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00168	345
UPC 786689346942	alias	EAT	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00170	347
UPC 786689346959	alias	EAT	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00169	346
UPC 786689346966	alias	EAT	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00171	348
UPC 786689346973	alias	EAT	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00172	349

Number	Type	Mfr	Description	Catalogue ID	Pg
UPC 786689346980	alias	EAT	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00173	350
UPC 786689346997	alias	EAT	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00174	351
UPC 786689347000	alias	EAT	PRL3X horizontal 6-circuit GHB connector kit, 1-phase	EDH-EAT-00177	354
UPC 786689347017	alias	EAT	PRL3X horizontal 12-circuit GHB connector kit, 3-phase	EDH-EAT-00178	355
UPC 786689347024	alias	EAT	PRL3X horizontal 12-circuit GHB connector kit, 1-phase	EDH-EAT-00179	356
UPC 786689347031	alias	EAT	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00175	352
UPC 786689347048	alias	EAT	PRL3X horizontal 6-circuit GHB connector kit, 3-phase	EDH-EAT-00176	353
UPC 786689347062	alias	EAT	PRL3X horizontal 18-circuit GHB connector kit, 3-phase	EDH-EAT-00180	357
UPC 786689347079	alias	EAT	PRL3X horizontal 18-circuit GHB connector kit, 1-phase	EDH-EAT-00181	358
UPC 786689347086	alias	EAT	PRL3X horizontal 24-circuit GHB connector kit, 3-phase	EDH-EAT-00182	359
UPC 786689347093	alias	EAT	PRL3X horizontal 24-circuit GHB connector kit, 1-phase	EDH-EAT-00183	360
UPC 786689497651	alias	EAT	EZ Trim lock, 24-48 in	EDH-EAT-00409	253
UPC 786689527952	alias	EAT	EZ Trim lock/latch 5155C81G05	EDH-EAT-01177	254
UPC 786689527969	alias	EAT	EZ Trim lock/latch 5155C81G06	EDH-EAT-01178	255
UPC 786689527976	alias	EAT	EZ Trim lock/latch 5155C81G04	EDH-EAT-01176	254
UPC 786689814915	alias	EAT	Pow-R-Xpress PRL4X PD2 1-pole filler	EDH-EAT-00297	506
UPC 786689832193	alias	EAT	EZ Trim, vented surface-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01014	266
UPC 786689832209	alias	EAT	EZ Trim, vented flush-mounted, 36 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01015	266
UPC 786689832216	alias	EAT	EZ Trim, vented surface-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01020	267
UPC 786689832223	alias	EAT	EZ Trim, vented flush-mounted, 42 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01021	267
UPC 786689832230	alias	EAT	EZ Trim, vented surface-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01026	268
UPC 786689832247	alias	EAT	EZ Trim, vented flush-mounted, 48 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01027	268
UPC 786689832254	alias	EAT	EZ Trim, vented surface-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01038	270
UPC 786689832261	alias	EAT	EZ Trim, vented flush-mounted, 60 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01039	270
UPC 786689832278	alias	EAT	EZ Trim, vented surface-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01044	271
UPC 786689832285	alias	EAT	EZ Trim, vented flush-mounted, 72 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01045	271
UPC 786689832292	alias	EAT	EZ Trim, vented surface-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01050	272
UPC 786689832308	alias	EAT	EZ Trim, vented flush-mounted, 90 in high (PRL1a/2a/3a, PRL1X/2X/3X)	EDH-EAT-01051	272
UPC 887621572570	alias	SIE	Revised P1 bonding kit including service disconnect label	EDH-SIE-00096	1682
UVH1LP08K	primary	EAT	Eaton F-frame undervoltage release field kit, 110-127 Vac, left pole	EDH-EAT-01320	378
UVH1LP11K	primary	EAT	Eaton F-frame undervoltage release field kit, 208-240 Vac, left pole	EDH-EAT-01321	378
UVH1LP15K	primary	EAT	Eaton F-frame undervoltage release field kit, 380-480 Vac, left pole	EDH-EAT-01322	379
UVH1LP21K	primary	EAT	Eaton F-frame undervoltage release field kit, 24 Vdc, left pole	EDH-EAT-01325	379
UVH1RP08K	primary	EAT	Eaton F-frame undervoltage release field kit, 110-127 Vac, right pole	EDH-EAT-01323	379
UVH1RP11K	primary	EAT	Eaton F-frame undervoltage release field kit, 208-240 Vac, right pole	EDH-EAT-01324	380
VB610	primary	SIE	ITE Vacu-Break mounting hardware straps	EDH-SIE-00442	1730
VB6150	primary	SIE	Vacu-Break 15in single unit (400/600A) mounting kit, Series 5/6 branch bus	EDH-SIE-00461	1736

Number	Type	Mfr	Description	Catalogue ID	Pg
VB657	primary	SIE	Vacu-Break 5in / 7.5in twin unit mounting kit, Series 5/6 copper branch bus	EDH-SIE-00462	1736
VB657C	alias	SIE	Vacu-Break 5in / 7.5in twin unit mounting kit, Series 5/6 copper branch bus	EDH-SIE-00462	1736
VB671	primary	SIE	Vacu-Break 7.5in / 10in single unit (200A) mounting kit, Series 5/6	EDH-SIE-00463	1738
VC100FA	primary	SQD	Square D FA Al compression lug kit	EDH-SQD-00472	1007
VC250KA3	primary	SQD	Square D KA Al compression lug kit	EDH-SQD-00473	1009
VC250KA35	primary	SQD	Square D KA Al compression lug kit	EDH-SQD-00474	1010
VC400LA3	primary	SQD	Square D LA Al compression lug kit	EDH-SQD-00476	1013
VC400LA35	primary	SQD	Square D LA Al compression lug kit	EDH-SQD-00475	1013
VC400LA5	primary	SQD	Square D LA Al compression lug kit	EDH-SQD-00477	1013
VC400LA7	primary	SQD	Square D LA Al compression lug kit	EDH-SQD-00478	1014
VC600LI3	primary	SQD	Square D LI Al compression lug kit	EDH-SQD-00479	1017
VC600LI5	primary	SQD	Square D LI Al compression lug kit	EDH-SQD-00480	1017
VC600LI7	primary	SQD	Square D LI Al compression lug kit	EDH-SQD-00481	1018
VCEL02114S1	primary	SQD	VERSA-CRIMP compression lug VCEL02114S1	EDH-SQD-00294	928
VCEL021-14S1	alias	SQD	VERSA-CRIMP compression lug VCEL02114S1	EDH-SQD-00294	928
VCEL030516H1	primary	SQD	VERSA-CRIMP compression lug VCEL030516H1	EDH-SQD-00291	928
VCEL030-516H1	alias	SQD	VERSA-CRIMP compression lug VCEL030516H1	EDH-SQD-00291	928
VCEL05012H1	primary	SQD	VERSA-CRIMP compression lug VCEL05012H1	EDH-SQD-00292	928
VCEL050-12H1	alias	SQD	VERSA-CRIMP compression lug VCEL05012H1	EDH-SQD-00292	928
VCEL06012H1	primary	SQD	VERSA-CRIMP compression lug VCEL06012H1	EDH-SQD-00299	929
VCEL060-12H1	alias	SQD	VERSA-CRIMP compression lug VCEL06012H1	EDH-SQD-00299	929
VCEL07512H1	primary	SQD	VERSA-CRIMP compression lug VCEL07512H1	EDH-SQD-00293	929
VCEL075-12H1	alias	SQD	VERSA-CRIMP compression lug VCEL07512H1	EDH-SQD-00293	929
VCELC02114S1	primary	SQD	VERSA-CRIMP compression lug VCELC02114S1	EDH-SQD-00295	929
VCELC021-14S1	alias	SQD	VERSA-CRIMP compression lug VCELC02114S1	EDH-SQD-00295	929
VCELC03038H1	primary	SQD	VERSA-CRIMP compression lug VCELC03038H1	EDH-SQD-00296	929
VCELC030-38H1	alias	SQD	VERSA-CRIMP compression lug VCELC03038H1	EDH-SQD-00296	929
VCELC05012H1	primary	SQD	VERSA-CRIMP compression lug VCELC05012H1	EDH-SQD-00297	930
VCELC050-12H1	alias	SQD	VERSA-CRIMP compression lug VCELC05012H1	EDH-SQD-00297	930
VCELC07512H1	primary	SQD	VERSA-CRIMP compression lug VCELC07512H1	EDH-SQD-00298	930
VCELC075-12H1	alias	SQD	VERSA-CRIMP compression lug VCELC07512H1	EDH-SQD-00298	930
VWPB2024	primary	EAT	Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 24 x 20 x 6 in	EDH-EAT-01064	284
VWPB2036	primary	EAT	Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 36 x 20 x 6 in	EDH-EAT-01066	284
VWPB2048	primary	EAT	Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 48 x 20 x 6 in	EDH-EAT-01068	284
VWPB2060	primary	EAT	Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 60 x 20 x 6 in	EDH-EAT-01070	285
VWPB2072	primary	EAT	Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 72 x 20 x 6 in	EDH-EAT-01072	285
VWPB2090	primary	EAT	Type 12/3R box for PRL1a/2a/3a, PRL1X/2X/3X, 90 x 20 x 6 in	EDH-EAT-01074	285
W49813	primary	SIE	Vacu-Break switch fuse clip adapter kit	EDH-SIE-00745	1748
W49814	primary	SIE	Vacu-Break switch fuse clip adapter kit	EDH-SIE-00743	1748
W49815	primary	SIE	Vacu-Break switch fuse clip adapter kit	EDH-SIE-00746	1749
W49816	primary	SIE	Vacu-Break switch fuse clip adapter kit	EDH-SIE-00744	1749
Westinghouse DA breaker	supersedes	EAT	CDP Series C DK breaker retrofit kit (replaces Westinghouse DA)	EDH-EAT-00361	96
Westinghouse EB, EHB breaker	supersedes	EAT	CDP Series C EHD breaker retrofit kit (replaces Westinghouse EB, EHB)	EDH-EAT-00353	97
Westinghouse FB breaker	supersedes	EAT	CDP Series C FDB breaker retrofit kit (replaces Westinghouse FB)	EDH-EAT-00354	99
Westinghouse HFB breaker	supersedes	EAT	CDP Series C FD breaker retrofit kit (replaces Westinghouse HFB)	EDH-EAT-00355	98
Westinghouse HKA breaker	supersedes	EAT	CDP Series C HKD breaker retrofit kit (replaces Westinghouse HKA)	EDH-EAT-00357	100

Number	Type	Mfr	Description	Catalogue ID	Pg
Westinghouse JA breaker	supersedes	EAT	CDP Series C KDB breaker retrofit kit (replaces Westinghouse JA)	EDH-EAT-00359	103
Westinghouse JB breaker	supersedes	EAT	CDP Series C JDB breaker retrofit kit (replaces Westinghouse JB)	EDH-EAT-00360	102
Westinghouse KA breaker	supersedes	EAT	CDP Series C KD breaker retrofit kit (replaces Westinghouse KA)	EDH-EAT-00356	102
Westinghouse KB, HKB breaker	supersedes	EAT	CDP Series C JD breaker retrofit kit (replaces Westinghouse KB, HKB)	EDH-EAT-00358	101
Westinghouse LA, HLA breaker	supersedes	EAT	CDP Series C LD breaker retrofit kit (replaces Westinghouse LA, HLA)	EDH-EAT-00362	104
Westinghouse MA, HMA breaker	supersedes	EAT	CDP Series C MDL breaker retrofit kit (replaces Westinghouse MA, HMA)	EDH-EAT-00363	105
Westinghouse NB, HNB breaker	supersedes	EAT	CDP Series C ND breaker retrofit kit (replaces Westinghouse NB, HNB)	EDH-EAT-00364	106
WFP1	alias	OTH	Deadfront filler blank BFP1WE for Westinghouse CDP (1X)	EDH-OTH-00141	93
WFP2	alias	OTH	Deadfront filler blank BFP2WE for Westinghouse CDP (2X)	EDH-OTH-00142	93
WFP3	alias	OTH	Deadfront filler blank BFP3WE for Westinghouse CDP (3X)	EDH-OTH-00143	93
WPUG14	primary	SIE	Super Blue Pennant pull section	EDH-SIE-00737	1747
WPUG26	primary	SIE	Super Blue Pennant pull section	EDH-SIE-00739	1747
YA060HD	primary	SQD	PowerPact H-frame Al/Cu compression lug kit	EDH-SQD-00395	1024
YA150HD	primary	SQD	PowerPact H-frame Al/Cu compression lug kit	EDH-SQD-00396	1024
YA150JD	primary	SQD	PowerPact J-frame Al/Cu compression lug kit	EDH-SQD-00397	1030
YA250J35	primary	SQD	PowerPact J-frame Al/Cu compression lug kit	EDH-SQD-00398	1030
YA400L31K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00399	1041
YA400L51K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00401	1042
YA400L51K4	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00405	1042
YA400L71K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00403	1042
YA400L71K4	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00407	1043
YA600L32K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00400	1043
YA600L32K4	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00404	1043
YA600L52K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00402	1044
YA600L52K4	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00406	1044
YS2036	primary	EAT	Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 36 in high x 5.75 in de	EDH-EAT-01052	285
YS2042	primary	EAT	Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 42 in high x 5.75 in de	EDH-EAT-01054	286
YS2048	primary	EAT	Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 48 in high x 5.75 in de	EDH-EAT-01056	286
YS2060	primary	EAT	Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 60 in high x 5.75 in de	EDH-EAT-01058	286
YS2072	primary	EAT	Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 72 in high x 5.75 in de	EDH-EAT-01060	286
YS2090	primary	EAT	Pow-R-Line 1a/2a/3a standard Type 1 box, 20.00 in wide x 90 in high x 5.75 in de	EDH-EAT-01062	287
YSC969	primary	EAT	Pow-R-Line column (LX) Type 1 box, 69 in high	EDH-EAT-01156	169
YSC978	primary	EAT	Pow-R-Line column (LX) Type 1 box, 78 in high	EDH-EAT-01161	169
YSC981	primary	EAT	Pow-R-Line column (LX) Type 1 box, 81 in high	EDH-EAT-01166	169
YSC990	primary	EAT	Pow-R-Line column (LX) Type 1 box, 90 in high	EDH-EAT-01171	169

12.4 Breaker compatibility index

Parts linked to each breaker family. The confidence shown is that of the part's breaker-compatibility claim.

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA41 (SIE)	BBKVA4P2P3	branch-connector-kit	P2, P3	A	1489
3VA41 (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	1672
3VA41 (SIE)	DFFPVA41A	filler-plate	RP1	—	1678
3VA41 (SIE)	DFK1	deadfront	P2, P3	—	1498

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA41 (SIE)	DFP3AP01	filler-plate	P2, P3	—	1503
3VA41 (SIE)	MBKVA41A	main-breaker-kit	RP1	A	1621
3VA41 (SIE)	MBKVA41B	main-breaker-kit	RP1	A	1622
3VA41 (SIE)	P1CONACPHAL	connector-strap	RP1	A	1635
3VA41 (SIE)	P1CONACPHCU	connector-strap	RP1	A	1635
3VA41 (SIE)	P1CONBPHAL	connector-strap	RP1	A	1636
3VA41 (SIE)	P1CONBPHCU	connector-strap	RP1	A	1636
3VA41 (SIE)	P1SCRWS	fastener	RP1, P1	—	1687
3VA41 (SIE)	S3VA41T	branch-connector-kit	P4, P5, SB	A	1526
3VA41 (SIE)	S3VA41TD	branch-connector-kit	P4, P5, SB, CDP6	A	1527
3VA41 (SIE)	S3VA41TDHD	branch-connector-kit	P5, SB, CDP6	A	1577
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9233-0QA00	fastener	SB	—	1732
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9243-0QA00	fastener	SB	—	1732
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9473-0QA00	fastener	SB	—	1733
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA5262P2HW	hardware-kit	P2, P3	A	1504
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA5262P2S	branch-connector-kit	P2, P3	A	1490
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA52P3HW	hardware-kit	P3	A	1514
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA52P3T	branch-connector-kit	P3	A	1510
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262A	filler-plate	RP1	—	1678
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262P2A	filler-plate	P2, P3	—	1502
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262P2B	filler-plate	P2, P3	—	1503

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5363A	filler-plate	RP1, P2, P3	—	1679
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5262A	main-breaker-kit	RP1	A	1623
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5262B	main-breaker-kit	RP1	A	1623
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5363A	main-breaker-kit	RP1	A	1624
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5363JD	conversion-kit	RP1	—	1687
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52PR	hardware-kit	P4, P5, SB	—	1560
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52T	branch-connector-kit	P4, P5, SB	A	1527
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52TD	branch-connector-kit	P4, P5, SB, CDP6	A	1528
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53PR	hardware-kit	SB	—	1732
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53T	branch-connector-kit	P4, P5, SB	A	1529
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53T2D	branch-connector-kit	P5, SB	A	1578
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53TD	branch-connector-kit	P4, P5, SB, CDP6	A	1530
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54T	branch-connector-kit	P4, P5, SB	A	1531

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54T2D	branch-connector-kit	P5, SB	A	1579
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54TD	branch-connector-kit	P4, P5, SB, CDP6	A	1531
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA55TD	branch-connector-kit	P5, SB	A	1580
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA57TD	branch-connector-kit	P5, SB	A	1580
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA63T	branch-connector-kit	P4	A	1532
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA63TD	branch-connector-kit	P5, SB, CDP6	A	1581
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA64T	branch-connector-kit	P4	A	1533
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA64TD	branch-connector-kit	P5, SB, CDP6	A	1582
ABB A2 (Formula A2) molded case breaker (GEA)	ASPA23P	breaker-mounting-kit	RG-LIGHTING	A	1158
ABB SACE Tmax XT (XT1/XT2/XT4/XT5/XT6/XT7) (GEA)	ASPXT13P	breaker-mounting-kit	RG-LIGHTING	A	1159
ABB SACE Tmax XT (XT1/XT2/XT4/XT5/XT6/XT7) (GEA)	ASPXT23P	breaker-mounting-kit	RG-LIGHTING	A	1159
ABB SACE Tmax XT (XT1/XT2/XT4/XT5/XT6/XT7) (GEA)	ASPXT43P	breaker-mounting-kit	RG-LIGHTING	A	1160
ABB SACE Tmax XT (XT1/XT2/XT4/XT5/XT6/XT7) (GEA)	RGRPIFRK	breaker-mounting-kit	RG-NEXT	A	1162
BAB (EAT)	KPRL1BAB	branch-connector-kit	PRL1/PRL2	C	172
BL (SIE)	6BL2C	branch-connector-kit	CDP6, SB	A	1711
BL (SIE)	BBKB32	branch-connector-kit	P2, P3	A	1483
BL (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	1672
BL (SIE)	DFFPED01	filler-plate	RP1, P1	—	1673
BL (SIE)	DFFPVA41A	filler-plate	RP1	—	1678
BL (SIE)	DFK1	deadfront	P2, P3	—	1498
BL (SIE)	DFP3AP01	filler-plate	P2, P3	—	1503
BL (SIE)	ECBX231M	handle-lock	RP1, P1, P2, P3, S1/S2	A	1696
BL (SIE)	ECPLD1	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1699

Breaker family	Part	Component	Equipment family	Cl.	Pg
BL (SIE)	ECPLD1R	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1699
BL (SIE)	ECPLD2	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1699
BL (SIE)	ECPLD2R	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1700
BL (SIE)	ECPLD3	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1700
BL (SIE)	ECPLD3R	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1700
BL (SIE)	ECQL1	handle-lock	RP1, P1, P2, P3, S1/S2	C	1696
BL (SIE)	ECQLD3	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1700
BL (SIE)	ECQML12	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1694
BL (SIE)	ECQTH3	handle-lock	RP1, P1, P2, P3, S1/S2	A	1697
BL (SIE)	ECQTH4	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1701
BL (SIE)	MBKBFA	hardware-kit	RP1	A	1684
BL (SIE)	MBKBL1	main-breaker-kit	P1, S1/S2	A	1473
BL (SIE)	MBKBL3	main-breaker-kit	P1, S1/S2	A	1473
BL (SIE)	MBKVA41A	main-breaker-kit	RP1	A	1621
BL (SIE)	MBKVA41B	main-breaker-kit	RP1	A	1622
BL (SIE)	P1CONACPHAL	connector-strap	RP1	A	1635
BL (SIE)	P1CONACPHCU	connector-strap	RP1	A	1635
BL (SIE)	P1CONBPHAL	connector-strap	RP1	A	1636
BL (SIE)	P1CONBPHCU	connector-strap	RP1	A	1636
BL (SIE)	P1SCRWS	fastener	RP1, P1	—	1687
BL (SIE)	QF3	filler-plate	P1, P2, P3, SB, CDP6, SBP	A	1482
BL (SIE)	SBL	branch-connector-kit	P4, P5, SB	A	1533
BL (SIE)	SBLBD	branch-connector-kit	P4, P5, SB, CDP6	A	1534
BQ / BQH / HBQ (bolt-on, legacy) (SIE)	6BL2C	branch-connector-kit	CDP6, SB	A	1711
BQ / BQH / HBQ (bolt-on, legacy) (SIE)	QF3	filler-plate	P1, P2, P3, SB, CDP6, SBP	A	1482
BQ / BQH / HBQ / BQXD bolt-on (SIE)	BQFS2	barrier		A	1750
BQ / BQH / HBQ / BQXD bolt-on (SIE)	BR2	hardware-kit	RP1, P1, P2, P3, S1/S2	A	1682
BQ / BQH / HBQ / BQXD bolt-on (SIE)	BR3	hardware-kit	RP1, P1, P2, P3, S1/S2	A	1682
BQ / BQH / HBQ / BQXD bolt-on (SIE)	BR4	hardware-kit	RP1, P1, P2, P3, S1/S2	A	1683
BQ / BQH / HBQ / BQXD bolt-on (SIE)	ECBX231M	handle-lock	RP1, P1, P2, P3, S1/S2	A	1696
BQ / BQH / HBQ / BQXD bolt-on (SIE)	ECPLD1	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1699
BQ / BQH / HBQ / BQXD bolt-on (SIE)	ECPLD1R	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1699
BQ / BQH / HBQ / BQXD bolt-on (SIE)	ECPLD2	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1699
BQ / BQH / HBQ / BQXD bolt-on (SIE)	ECPLD2R	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1700
BQ / BQH / HBQ / BQXD bolt-on (SIE)	ECPLD3	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1700
BQ / BQH / HBQ / BQXD bolt-on (SIE)	ECPLD3R	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1700
BQ / BQH / HBQ / BQXD bolt-on (SIE)	ECQL1	handle-lock	RP1, P1, P2, P3, S1/S2	C	1696
BQ / BQH / HBQ / BQXD bolt-on (SIE)	ECQLD3	padlock-attachment	RP1, P1, P2, P3, S1/S2	A	1700
BQ / BQH / HBQ / BQXD bolt-on (SIE)	ECQML12	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1694
BQ / BQH / HBQ / BQXD bolt-on (SIE)	FP9508	hardware-kit	RP1, P1, P2, P3, S1/S2	A	1683

Breaker family	Part	Component	Equipment family	Cl.	Pg
BQ / BQH / HBQ / BQXD bolt-on (SIE)	FP9555	hardware-kit	RP1, P1, P2, P3, S1/S2	A	1683
BQ / BQH / HBQ / BQXD bolt-on (SIE)	FP9556	hardware-kit	RP1, P1, P2, P3, S1/S2	A	1683
BQ / BQH / HBQ / BQXD bolt-on (SIE)	MB120	fastener	RP1, P1, P2, P3, S1/S2	A	1686
BQ / BQH / HBQ / BQXD bolt-on (SIE)	SMB6R	hardware-kit	RP1, P1, P2, P3, S1/S2	A	1685
BQ / BQH / HBQ / BQXD bolt-on (SIE)	TA1Q1	lug		A	1749
BQ / BQH / HBQ / BQXD bolt-on (SIE)	TC1Q1	lug		A	1750
BQ / BQH / HBQ / BQXD bolt-on (SIE)	TCH65K	hardware-kit	RP1, P1, P2, P3, S1/S2	A	1685
BQD (SIE)	BBKB32	branch-connector-kit	P2, P3	A	1483
BQD (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	1672
BQD (SIE)	DFFPED01	filler-plate	RP1, P1	—	1673
BQD (SIE)	DFFPVA41A	filler-plate	RP1	—	1678
BQD (SIE)	DFK1	deadfront	P2, P3	—	1498
BQD (SIE)	DFP3AP01	filler-plate	P2, P3	—	1503
BQD (SIE)	MBKBC3	main-breaker-kit	P1, S1/S2	A	1473
BQD (SIE)	MBKBFA	hardware-kit	RP1	A	1684
BQD (SIE)	MBKVA41A	main-breaker-kit	RP1	A	1621
BQD (SIE)	MBKVA41B	main-breaker-kit	RP1	A	1622
BQD (SIE)	P1CONACPHAL	connector-strap	RP1	A	1635
BQD (SIE)	P1CONACPHCU	connector-strap	RP1	A	1635
BQD (SIE)	P1CONBPHAL	connector-strap	RP1	A	1636
BQD (SIE)	P1CONBPHCU	connector-strap	RP1	A	1636
BQD (SIE)	P1SCRWS	fastener	RP1, P1	—	1687
BQD (SIE)	SBL	branch-connector-kit	P4, P5, SB	A	1533
BQD (SIE)	SBLBD	branch-connector-kit	P4, P5, SB, CDP6	A	1534
BQD / CQD (incl. BQD6, CQD6) (SIE)	BQDHBD	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1695
BQD / CQD (incl. BQD6, CQD6) (SIE)	BQDHT2	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1695
BQD / CQD (incl. BQD6, CQD6) (SIE)	BQDHT3	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1696
BQD / CQD (incl. BQD6, CQD6) (SIE)	BQDPLD	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1699
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDA1	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1689
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDA1BA	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1689
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDA2	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1690
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDBA	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1690
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDFMB1	mounting-bracket		A	1751
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDFMB2	mounting-bracket		A	1751
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDFMB3	mounting-bracket		A	1751
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDSMK	fastener		A	1751
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDST12	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1690

Breaker family	Part	Component	Equipment family	Cl.	Pg
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDST120	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1691
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDST120AAS	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1691
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDST125	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1691
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDST24	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1692
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDST240	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1692
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDST277	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1692
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDST48	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1693
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDST480	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1693
BQD / CQD (incl. BQD6, CQD6) (SIE)	CQDST600	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1693
BQD / CQD (incl. BQD6, CQD6) (SIE)	FMPG1	mounting-bracket		A	1753
BQD / CQD (incl. BQD6, CQD6) (SIE)	FMPG2	mounting-bracket		A	1754
BQD / CQD (incl. BQD6, CQD6) (SIE)	FMPG3	mounting-bracket		A	1754
BQD / CQD (incl. BQD6, CQD6) (SIE)	QF3	filler-plate	P1, P2, P3, SB, CDP6, SBP	A	1482
BQD / CQD (incl. BQD6, CQD6) (SIE)	SBLBD	branch-connector-kit	P4, P5, SB, CDP6	A	1534
BQD / CQD (incl. BQD6, CQD6) (SIE)	TSSG3A	barrier		A	1752
BR (EAT)	3BRS225	sub-feed-lug-kit	BR	A	24
BR (EAT)	3BRSF150	sub-feed-lug-kit	BR	A	24
BR (EAT)	BHT	handle-lock	BR	—	30
BR (EAT)	BINA	neutral-assembly	BR	A	28
BR (EAT)	BRFP	filler-plate	BR	—	29
BR (EAT)	BRL200	main-lug-kit	BR	—	23
BR (EAT)	BRLW	padlock-attachment	BR	A	31
BR (EAT)	BRLW1	padlock-attachment	BR	—	31
BR (EAT)	BRS225	sub-feed-lug-kit	BR	—	25
BR (EAT)	BRSF125	sub-feed-lug-kit	BR	—	25
BR (EAT)	BRSF150	sub-feed-lug-kit	BR	—	26
BR (EAT)	BWFP	filler-plate	BR	—	29
BR (EAT)	NL300	lug	BR	A	27
CA (EAT)	KCDPCA	breaker-mounting-kit	CDP	A	84
CA (EAT)	KPRL3CA	branch-connector-kit	PRL3, WEB	A	321
CA (EAT)	KPRL4CA	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	434
CA/CAH/HCA 225 A frame (EAT)	4176B66	deadfront	PRL3A	—	363
CA/CAH/HCA 225 A frame (EAT)	4176B80	deadfront	PRL3A	—	364
CA/CAH/HCA 225 A frame (EAT)	6555C40H01	filler-plate	PRL3A	—	370
CA/CAH/HCA 225 A frame (EAT)	6555C41H01	filler-plate	PRL3A	—	371
CA/CAH/HCA 225 A frame (EAT)	KCDPCA	breaker-mounting-kit	CDP	A	84
CA/CAH/HCA 225 A frame (EAT)	KPRL3CA	branch-connector-kit	PRL3, WEB	A	321

Breaker family	Part	Component	Equipment family	Cl.	Pg
CA/CAH/HCA 225 A frame (EAT)	KPRL4CA	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	434
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF015N	other		—	1895
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF020N	other		—	1895
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF0215N	other		—	1896
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF0220N	other		—	1896
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF0230N	other		—	1897
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF0240N	other		—	1897
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF0250N	other		—	1898
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF030N	other		—	1898
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF040N	other		—	1899
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF050N	other		—	1899
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF15N	other		—	1900
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF20N	other		—	1900
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF215N	other		—	1901
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF220N	other		—	1901
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF230N	other		—	1902
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF240N	other		—	1902
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF250N	other		—	1903
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF260N	other		—	1903
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF270N	other		—	1904
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF30N	other		—	1904

Breaker family	Part	Component	Equipment family	Cl.	Pg
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF340N	other		—	1904
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF380NB	other		—	1904
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF40N	other		—	1905
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIF50N	other		—	1905
Connecticut Electric UBIF (UBI replacement for FPE Stab-Lok NA/NC/NB) (OTH)	UBIFPE1003	other		—	1905
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP115	other	PUSHMATIC	—	1604
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP120	other	PUSHMATIC	—	1604
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP130	other	PUSHMATIC	—	1605
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP1515	other	PUSHMATIC	—	1605
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP1520	other	PUSHMATIC	—	1606
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP2020	other	PUSHMATIC	—	1606
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP2100	other	PUSHMATIC	—	1607
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP215	other	PUSHMATIC	—	1607
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP220	other	PUSHMATIC	—	1608
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP230	other	PUSHMATIC	—	1608
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP240	other	PUSHMATIC	—	1609
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP250	other	PUSHMATIC	—	1609
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP260	other	PUSHMATIC	—	1610
Connecticut Electric UBIP (UBI replacement for Pushmatic) (OTH)	UBIP270	other	PUSHMATIC	—	1610
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ0220	other	ZIN-Q	—	1879
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ0230	other	ZIN-Q	—	1879

Breaker family	Part	Component	Equipment family	Cl.	Pg
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ0240	other	ZIN-Q	—	1880
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ0250	other	ZIN-Q	—	1880
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ0260	other	ZIN-Q	—	1881
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ15	other	ZIN-Q	—	1881
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ1515	other	ZIN-Q	—	1882
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ1520	other	ZIN-Q	—	1882
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ20	other	ZIN-Q	—	1883
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ2020	other	ZIN-Q	—	1883
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ2100	other	ZIN-Q	—	1884
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ2125	other	ZIN-Q	—	1884
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ220	other	ZIN-Q	—	1885
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ230	other	ZIN-Q	—	1885
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ240	other	ZIN-Q	—	1886
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ250	other	ZIN-Q	—	1886
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ260	other	ZIN-Q	—	1887
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ270	other	ZIN-Q	—	1887
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ280	other	ZIN-Q	—	1888
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ290	other	ZIN-Q	—	1888
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ30	other	ZIN-Q	—	1889
Connecticut Electric UBIZ (UBI replacement for Zinsco Q/QC/R/RC) (OTH)	UBIZ3030	other	ZIN-Q	—	1889
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	4176B56	deadfront	PRL3A	—	362
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	4176B70	deadfront	PRL3A	—	364

Breaker family	Part	Component	Equipment family	Cl.	Pg
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	EEEHD220015SB2	breaker-mounting-kit	EE, EP, ES	A	114
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KCDPFBP	breaker-mounting-kit	CDP	A	86
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KCDPLCL	breaker-mounting-kit	CDP	A	90
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KMP40KD3400	conversion-kit	MP40, CDP, NFB, MP2	A	146
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	439
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KPRL4FDCL	breaker-mounting-kit	PRL4, PRL4X	A	444
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KPRL4LCL	breaker-mounting-kit	PRL4, PRL4X	A	451
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	MP40KLL400-3	branch-connector-kit	MP40, MP2, CDP, NFB	A	144
Cutler-Hammer CC / CCH / CHH (EAT)	47-28007	filler-plate	PH	—	163
Cutler-Hammer CC / CCH / CHH (EAT)	47-28008	filler-plate	PH	—	164
Cutler-Hammer CC / CCH / CHH (EAT)	47-28266	filler-plate	PH	—	164
Cutler-Hammer CC / CCH / CHH (EAT)	99-3613	deadfront	PH	—	160
Cutler-Hammer CC / CCH / CHH (EAT)	99-3613-10	deadfront	PH	—	160
Cutler-Hammer CC / CCH / CHH (EAT)	99-3613-14	deadfront	PH	—	161
Cutler-Hammer CC / CCH / CHH (EAT)	99-3613-15	deadfront	PH	—	161
Cutler-Hammer CC / CCH / CHH (EAT)	99-3613-18	deadfront	PH	—	161
Cutler-Hammer CC / CCH / CHH (EAT)	99-3613-2	deadfront	PH	—	161
Cutler-Hammer CC / CCH / CHH (EAT)	99-3613-21	deadfront	PH	—	162
Cutler-Hammer CC / CCH / CHH (EAT)	99-3613-24	deadfront	PH	—	162
Cutler-Hammer CC / CCH / CHH (EAT)	99-3613-31	deadfront	PH	—	162
Cutler-Hammer CC / CCH / CHH (EAT)	99-3613-6	deadfront	PH	—	162
Cutler-Hammer CC / CCH / CHH (EAT)	99-3613-7	deadfront	PH	—	163
Cutler-Hammer CC / CCH / CHH (EAT)	KPHCC3175S	branch-connector-kit	PH	C	157
Cutler-Hammer CC / CCH / CHH (EAT)	MP40CHH	branch-connector-kit	MP40, MP2	C	139
Cutler-Hammer CC / CCH / CHH (EAT)	MP40ED225-3	branch-connector-kit	MP40, MP2	C	140
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KC225-2	branch-connector-kit	MP40, MP2, CDP, NFB	A	140
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KC225-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	75
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KCHH225-2	branch-connector-kit	MP40, MP2, CDP, NFB	A	141
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KCHH225-3	branch-connector-kit	MP40, MP2, CDP, NFB	A	141
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KF100-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	76

Breaker family	Part	Component	Equipment family	Cl.	Pg
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KJ225-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	77
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KK400-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	77
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KL400-3	branch-connector-kit	MP40, MP2	C	143
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KL600-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	78
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KM800-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	79
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KN1200-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	80
Cutler-Hammer CC / CCH / CHH (EAT)	PH2CC1	branch-connector-kit	PH	A	157
Cutler-Hammer CC / CCH / CHH (EAT)	PH3CC3	branch-connector-kit	PH	A	158
Cutler-Hammer CH / CHB (EAT)	39-3613-16	deadfront	PB	—	150
Cutler-Hammer CH / CHB (EAT)	39-3613-27	deadfront	PB	—	150
Cutler-Hammer CH / CHB (EAT)	99-3613	deadfront	PH	—	160
Cutler-Hammer CH / CHB (EAT)	99-3613-10	deadfront	PH	—	160
Cutler-Hammer CH / CHB (EAT)	99-3613-11	deadfront	PB	—	150
Cutler-Hammer CH / CHB (EAT)	99-3613-13	deadfront	PB	—	151
Cutler-Hammer CH / CHB (EAT)	99-3613-14	deadfront	PH	—	161
Cutler-Hammer CH / CHB (EAT)	99-3613-15	deadfront	PH	—	161
Cutler-Hammer CH / CHB (EAT)	99-3613-17	deadfront	PB	—	151
Cutler-Hammer CH / CHB (EAT)	99-3613-18	deadfront	PH	—	161
Cutler-Hammer CH / CHB (EAT)	99-3613-2	deadfront	PH	—	161
Cutler-Hammer CH / CHB (EAT)	99-3613-20	deadfront	PB	—	151
Cutler-Hammer CH / CHB (EAT)	99-3613-21	deadfront	PH	—	162
Cutler-Hammer CH / CHB (EAT)	99-3613-22	deadfront	PB	—	151
Cutler-Hammer CH / CHB (EAT)	99-3613-24	deadfront	PH	—	162
Cutler-Hammer CH / CHB (EAT)	99-3613-28	deadfront	PB	—	152
Cutler-Hammer CH / CHB (EAT)	99-3613-29	deadfront	PB	—	152
Cutler-Hammer CH / CHB (EAT)	99-3613-3	deadfront	PB	—	152
Cutler-Hammer CH / CHB (EAT)	99-3613-30	deadfront	PB	—	152
Cutler-Hammer CH / CHB (EAT)	99-3613-31	deadfront	PH	—	162
Cutler-Hammer CH / CHB (EAT)	99-3613-4	deadfront	PB	—	153
Cutler-Hammer CH / CHB (EAT)	99-3613-5	deadfront	PB	—	153

Breaker family	Part	Component	Equipment family	Cl.	Pg
Cutler-Hammer CH / CHB (EAT)	99-3613-6	deadfront	PH	—	162
Cutler-Hammer CH / CHB (EAT)	99-3613-7	deadfront	PH	—	163
Cutler-Hammer CH / CHB (EAT)	99-3613-8	deadfront	PB	—	153
Cutler-Hammer CH / CHB (EAT)	99-3613-9	deadfront	PB	—	153
Cutler-Hammer CH / CHB (EAT)	CH9CP	filler-plate	PB, PH	A	156
Cutler-Hammer CH / CHB (EAT)	PW30KT1NB	deadfront	PB	—	154
Cutler-Hammer CH / CHB (EAT)	PW30KT3NB	deadfront	PB	—	154
Cutler-Hammer CH / CHB (EAT)	PW34KT1NB	deadfront	PB	—	154
Cutler-Hammer CH / CHB (EAT)	PW34KT2NB	deadfront	PB	—	154
Cutler-Hammer CH / CHB (EAT)	PW38KT1NB	deadfront	PB	—	155
Cutler-Hammer CH / CHB (EAT)	PW42KT1NB	deadfront	PB	—	155
Cutler-Hammer CH / CHB (EAT)	PW50KT1NB	deadfront	PB	—	155
DA (EAT)	KCDPDK	conversion-kit	CDP	A	96
DA (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	89
E150 line (TEB, TED, THED, TEC) (GEA)	254V644P1	fastener		A	1379
E150 line (TEB, TED, THED, TEC) (GEA)	343L162G1	fastener		A	1379
E150 line (TEB, TED, THED, TEC) (GEA)	343L162G7	fastener		A	1379
E150 line (TEB, TED, THED, TEC) (GEA)	343L564G7	hardware-kit		A	1378
E150 line (TEB, TED, THED, TEC) (GEA)	SEMSK1	hardware-kit		A	1451
E150 line (TEB, TED, THED, TEC) (GEA)	SEMSK2	hardware-kit		A	1452
E150 line (TEB, TED, THED, TEC) (GEA)	SEMSK3	hardware-kit		A	1452
E150 line (TEB, TED, THED, TEC) (GEA)	SEMSK4	hardware-kit		A	1452
E150 line (TEB, TED, THED, TEC) (GEA)	TC012	lug		A	1375
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL12	lug		A	1375
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL12A	lug		A	1375
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL14	lug		A	1376
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL15	lug		A	1376
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL19PD1	lug		A	1438
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL19PD3	lug-kit		A	1436
E150 line (TEB, TED, THED, TEC) (GEA)	TE12PD1	breaker-mounting-kit		A	1377
E150 line (TEB, TED, THED, TEC) (GEA)	TE12PD2	breaker-mounting-kit		A	1377

Breaker family	Part	Component	Equipment family	Cl.	Pg
E150 line (TEB, TED, THED, TEC) (GEA)	TE13PC1	breaker-mounting-kit		A	1450
E150 line (TEB, TED, THED, TEC) (GEA)	TE13PD1	breaker-mounting-kit		A	1450
E150 line (TEB, TED, THED, TEC) (GEA)	TE13PD2	breaker-mounting-kit		A	1451
E150 line (TEB, TED, THED, TEC) (GEA)	TEDLS	barrier		A	1378
E150 line (TEB, TED, THED, TEC) (GEA)	TEDPLD2	padlock-attachment	SPECTRA-PP, A-SERIES-PWR	A	1358
E150 line (TEB, TED, THED, TEC) (GEA)	TEF1	breaker-accessory		A	1380
E150 line (TEB, TED, THED, TEC) (GEA)	TEF2	breaker-accessory		A	1380
E150 line (TEB, TED, THED, TEC) (GEA)	TEF3	breaker-accessory		A	1380
E150 line (TEB, TED, THED, TEC) (GEA)	TEF4	breaker-accessory		A	1381
E150 line (TEB, TED, THED, TEC) (GEA)	TEFPLD1	padlock-attachment	A-SERIES, A-SERIES-PWR	A	1088
E150 line (TEB, TED, THED, TEC) (GEA)	TLC1PLD1	padlock-attachment	A-SERIES-PWR	A	1109
E150 line (TEB, TED, THED, TEC) (GEA)	TLC1PLD2	padlock-attachment	SPECTRA-PP, A-SERIES-PWR	A	1359
E150 line (TEB, TED, THED, TEC) (GEA)	TLD3	handle-lock	A-SERIES, A-SERIES-PWR	A	1084
E150 line (TEB, TED, THED, TEC) (GEA)	TMP1	mounting-bracket		A	1378
EB (EAT)	KCDPEHD	conversion-kit	CDP	A	97
EB (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	85
ED (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	85
ED (EAT)	KPRL3ED	branch-connector-kit	PRL3, WEB	A	321
ED (EAT)	KPRL4ED	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	437
ED (EAT)	KPRL4ED2	breaker-mounting-kit	PRL4, PRL4X	A	438
ED (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	460
ED (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	461
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	6CLE2	branch-connector-kit	P5, SB, CDP6	A	1563
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	6E62	branch-connector-kit	P5, SB, CDP6	A	1565
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	BBKED32	branch-connector-kit	P2, P3	A	1484
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	1672
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFPED01	filler-plate	RP1, P1	—	1673
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFPVA41A	filler-plate	RP1	—	1678
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFK1	deadfront	P2, P3	—	1498
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFP3AP01	filler-plate	P2, P3	—	1503

Breaker family	Part	Component	Equipment family	Cl.	Pg
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED1	main-breaker-kit	P1, S1/S2	A	1474
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED1A	main-breaker-kit	RP1	A	1613
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED3	main-breaker-kit	P1, S1/S2	A	1474
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED3A	main-breaker-kit	RP1	A	1614
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	QF3	filler-plate	P1, P2, P3, SB, CDP6, SBP	A	1482
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SCE	branch-connector-kit	P4	A	1535
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SCED	branch-connector-kit	P5, SB	A	1582
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SE6	branch-connector-kit	P4	A	1539
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SE6D	branch-connector-kit	P5, SB, CDP6	A	1586
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SMBKED1	main-breaker-kit	S1/S2, SE	A	1706
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SMBKED3	main-breaker-kit	S1/S2, SE	A	1706
EDB / EGB / EJB (E-frame bolt-on) (SQD)	AL100FD	lug-kit	NF	—	803
EDB / EGB / EJB (E-frame bolt-on) (SQD)	AL30FD	lug-kit	NF	—	803
EDB / EGB / EJB (E-frame bolt-on) (SQD)	CU100FD	lug-kit	NF	—	804
EDB / EGB / EJB (E-frame bolt-on) (SQD)	EDPAF	padlock-attachment	NF	C	817
EDB / EGB / EJB (E-frame bolt-on) (SQD)	HPAFD	padlock-attachment	NF	A	817
EDB / EGB / EJB (E-frame bolt-on) (SQD)	NFBFMB20	barrier	NF	—	809
EDB / EGB / EJB (E-frame bolt-on) (SQD)	NFEDBS	barrier	NF	—	809
EDB / EGB / EJB (E-frame bolt-on) (SQD)	NFFP15	filler-plate	NF	—	811
EDB / EGB / EJB (E-frame bolt-on) (SQD)	Q1100AN	lug	NF	—	804
EDB / EGB / EJB (E-frame bolt-on) (SQD)	SKNF250	branch-connector-kit	NF	—	804
EDB / EGB / EJB (E-frame bolt-on) (SQD)	SKNF600	branch-connector-kit	NF	—	805
EDB / EGB / EJB (E-frame bolt-on) (SQD)	TIKFD	hardware-kit	NF	—	815
EHB (EAT)	KCDPEHD	conversion-kit	CDP	A	97
EHB (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	85
EHD (EAT)	KCDPEHD	conversion-kit	CDP	A	97
EHD (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	85
EHD (EAT)	KCDPFB100-H	hardware-kit	CDP	—	95

Breaker family	Part	Component	Equipment family	Cl.	Pg
EHD (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	A	322
EHD (EAT)	KPRL4FD	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	441
EHD (EAT)	KPRL4FD1	breaker-mounting-kit	PRL4, PRL4X	A	442
EHD (EAT)	KPRL4FD2	breaker-mounting-kit	PRL4, PRL4X	A	443
EHD (EAT)	KPRL4X12	breaker-mounting-kit	PRL4, PRL4X	A	459
EHD (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	460
F225 line (TFJ, TFK, THFK, TFC) (GEA)	343L564G1	hardware-kit		A	1385
F225 line (TFJ, TFK, THFK, TFC) (GEA)	343L564G4	hardware-kit		A	1386
F225 line (TFJ, TFK, THFK, TFC) (GEA)	SFGMSK1	hardware-kit		A	1453
F225 line (TFJ, TFK, THFK, TFC) (GEA)	SFGMSK2	hardware-kit		A	1454
F225 line (TFJ, TFK, THFK, TFC) (GEA)	SFMSK1	hardware-kit		A	1454
F225 line (TFJ, TFK, THFK, TFC) (GEA)	SFMSK2	hardware-kit		A	1454
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TC024	lug		A	1382
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TCAL24	lug		A	1382
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TCAL27	lug		A	1382
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TCALK324	lug-kit		A	1381
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TF22PD1	breaker-mounting-kit		A	1383
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TF22PD2	breaker-mounting-kit		A	1383
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TF23PC1	breaker-mounting-kit		A	1453
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TF23PD1	breaker-mounting-kit		A	1384
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TF23PD2	breaker-mounting-kit		A	1384
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFK1	breaker-accessory		A	1386
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFK2	breaker-accessory		A	1386
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFKLD1	handle-lock	A-SERIES, A-SERIES-PWR	A	1083
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFKLS	barrier		A	1385
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFKPLD1	padlock-attachment	A-SERIES, A-SERIES-PWR	A	1088
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TLC4PLD1	padlock-attachment	A-SERIES-PWR	A	1110
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TLC4PLD2	padlock-attachment	SPECTRA-PP, A-SERIES-PWR	A	1359
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TMP2	mounting-bracket		A	1385
FA / FH (I-Line) (SQD)	2152620361	fastener	I-LINE, QED-2	A	774
FA / FH (I-Line) (SQD)	HC-2636-B	box/enclosure	I-LINE	—	760
FA / FH (I-Line) (SQD)	HC-2636-CF	trim	I-LINE	—	750
FA / FH (I-Line) (SQD)	HC-2645-B	box/enclosure	I-LINE	—	761
FA / FH (I-Line) (SQD)	HC-2645-CF	trim	I-LINE	—	750
FA / FH (I-Line) (SQD)	HC-2654-B	box/enclosure	I-LINE	—	761
FA / FH (I-Line) (SQD)	HC-2654-CF	trim	I-LINE	—	750

Breaker family	Part	Component	Equipment family	Cl.	Pg
FA / FH (I-Line) (SQD)	HC-2663-B	box/enclosure	I-LINE	—	761
FA / FH (I-Line) (SQD)	HC-2663-CF	trim	I-LINE	—	750
FA / FH (I-Line) (SQD)	HC-2672-B	box/enclosure	I-LINE	—	762
FA / FH (I-Line) (SQD)	HC-2672-CF	trim	I-LINE	—	751
FA / FH (I-Line) (SQD)	HC-2690-B	box/enclosure	I-LINE	—	762
FA / FH (I-Line) (SQD)	HC-2690-CF	trim	I-LINE	—	751
FA / FH (I-Line) (SQD)	HC-3238-B	box/enclosure	I-LINE	—	763
FA / FH (I-Line) (SQD)	HC-3238-TF	trim	I-LINE	—	751
FA / FH (I-Line) (SQD)	HC-3247-B	box/enclosure	I-LINE	—	764
FA / FH (I-Line) (SQD)	HC-3247-TF	trim	I-LINE	—	752
FA / FH (I-Line) (SQD)	HC-3256-B	box/enclosure	I-LINE	—	764
FA / FH (I-Line) (SQD)	HC-3256-TF	trim	I-LINE	—	752
FA / FH (I-Line) (SQD)	HC-3274-B	box/enclosure	I-LINE	—	765
FA / FH (I-Line) (SQD)	HC-3274-TF	trim	I-LINE	—	752
FA / FH (I-Line) (SQD)	HC-3292-B	box/enclosure	I-LINE	—	765
FA / FH (I-Line) (SQD)	HC-3292-TF	trim	I-LINE	—	752
FA / FH (I-Line) (SQD)	HC-4144-B	box/enclosure	I-LINE	—	766
FA / FH (I-Line) (SQD)	HC-4144-DB	box/enclosure	I-LINE	—	766
FA / FH (I-Line) (SQD)	HC-4144-TS	trim	I-LINE	—	753
FA / FH (I-Line) (SQD)	HC-4153-B	box/enclosure	I-LINE	—	767
FA / FH (I-Line) (SQD)	HC-4153-DB	box/enclosure	I-LINE	—	767
FA / FH (I-Line) (SQD)	HC-4153-TS	trim	I-LINE	—	753
FA / FH (I-Line) (SQD)	HC-4162-B	box/enclosure	I-LINE	—	767
FA / FH (I-Line) (SQD)	HC-4162-DB	box/enclosure	I-LINE	—	768
FA / FH (I-Line) (SQD)	HC-4162-TS	trim	I-LINE	—	753
FA / FH (I-Line) (SQD)	HC-4180-B	box/enclosure	I-LINE	—	768
FA / FH (I-Line) (SQD)	HC-4180-DB	box/enclosure	I-LINE	—	768
FA / FH (I-Line) (SQD)	HC-4180-TS	trim	I-LINE	—	753
FA / FH (I-Line) (SQD)	HCS-4144-TF	trim	I-LINE	—	755
FA / FH (I-Line) (SQD)	HCS-4153-TF	trim	I-LINE	—	755
FA / FH (I-Line) (SQD)	HCS-4162-TF	trim	I-LINE	—	755
FA / FH (I-Line) (SQD)	HCS-4180-TF	trim	I-LINE	—	756
FB (EAT)	KCDPFB100	breaker-mounting-kit	CDP	**A**	85
FB (EAT)	KCDPFDB	conversion-kit	CDP	**A**	99
FD (EAT)	KCDPED225	breaker-mounting-kit	CDP	**A**	85
FD (EAT)	KCDPFB100	breaker-mounting-kit	CDP	**A**	85
FD (EAT)	KCDPFB100-H	hardware-kit	CDP	—	95
FD (EAT)	KCDPFD	conversion-kit	CDP	**A**	98
FD (EAT)	KCDPFDB	conversion-kit	CDP	**A**	99
FD (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	**A**	322
FD (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	**A**	439
FD (EAT)	KPRL4FD	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	**A**	441
FD (EAT)	KPRL4FD1	breaker-mounting-kit	PRL4, PRL4X	**A**	442
FD (EAT)	KPRL4FD2	breaker-mounting-kit	PRL4, PRL4X	**A**	443
FD (EAT)	KPRL4FDCL	breaker-mounting-kit	PRL4, PRL4X	**A**	444
FD (EAT)	KPRL4X12	breaker-mounting-kit	PRL4, PRL4X	**A**	459
FD (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	**A**	460
FD (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	**A**	461
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	6CLF1	branch-connector-kit	SB, CDP6	**A**	1721

Breaker family	Part	Component	Equipment family	Cl.	Pg
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	6F62	branch-connector-kit	P5, SB, CDP6	A	1567
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	DFFPFD01	filler-plate	RP1, P1, S1/S2, SE, P2, P3	—	1674
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD1	main-breaker-kit	P1, S1/S2	A	1474
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD1A	main-breaker-kit	RP1	A	1615
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD3	main-breaker-kit	P1, S1/S2	A	1475
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD3A	main-breaker-kit	RP1	A	1615
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SCF	branch-connector-kit	P4	A	1536
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SCFD	branch-connector-kit	P5, SB, CDP6	A	1583
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SF6	branch-connector-kit	P4	A	1540
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SF6D	branch-connector-kit	P5, SB, CDP6	A	1586
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SMBKFD1	main-breaker-kit	S1/S2, SE	A	1706
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SMBKFD3	main-breaker-kit	S1/S2, SE	A	1707
FI frame (legacy) (SQD)	N100MFI	main-breaker-kit	NF	—	790
GB (EAT)	KPRL2GHB	branch-connector-kit	PRL1/PRL2	C	172
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKGB32	branch-connector-kit	P2, P3	A	1485
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKNB32	branch-connector-kit	P2, P3	A	1486
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKVA4P2P3	branch-connector-kit	P2, P3	A	1489
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BQDHBD	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1695
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BQDHT2	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1695
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BQDHT3	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1696
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BQDPLD	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1699
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDA1	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1689

Breaker family	Part	Component	Equipment family	Cl.	Pg
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDA1BA	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1689
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDA2	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1690
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDBA	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1690
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDST12	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1690
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDST120	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1691
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDST120AAS	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1691
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDST125	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1691
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDST24	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1692
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDST240	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1692
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDST277	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1692
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDST48	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1693
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDST480	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1693
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	CQDST600	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1693
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	1672
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFPED01	filler-plate	RP1, P1	—	1673
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFPVA41A	filler-plate	RP1	—	1678
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFK1	deadfront	P2, P3	—	1498
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFP3AP01	filler-plate	P2, P3	—	1503
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKBFA	hardware-kit	RP1	A	1684
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKNB1	main-breaker-kit	P1, S1/S2	A	1476
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKNB3	main-breaker-kit	P1, S1/S2	A	1476

Breaker family	Part	Component	Equipment family	Cl.	Pg
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKVA41A	main-breaker-kit	RP1	A	1621
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKVA41B	main-breaker-kit	RP1	A	1622
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONACPHAL	connector-strap	RP1	A	1635
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONACPHCU	connector-strap	RP1	A	1635
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONBPHAL	connector-strap	RP1	A	1636
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONBPHCU	connector-strap	RP1	A	1636
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1SCRWS	fastener	RP1, P1	—	1687
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	QF3	filler-plate	P1, P2, P3, SB, CDP6, SBP	A	1482
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41T	branch-connector-kit	P4, P5, SB	A	1526
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41TD	branch-connector-kit	P4, P5, SB, CDP6	A	1527
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41TDHD	branch-connector-kit	P5, SB, CDP6	A	1577
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	SGB2	branch-connector-kit	P4, P5, SB	A	1543
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	SGB2D	branch-connector-kit	P4, P5, SB, CDP6	A	1543
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	SNBD	branch-connector-kit	P4, P5, SB, CDP6	A	1550
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	TSSG3A	barrier		A	1752
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	343L564G2	hardware-kit		A	1403
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	343L564G3	hardware-kit		A	1421
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	343L564G7	hardware-kit		A	1378
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	ACSFPKTB4	filler-plate	SCP-PLUS	A	1169
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	ACSHKTB4	hardware-kit	SCP-PLUS	A	1182
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	ACSMKTB4	branch-connector-kit	SCP-PLUS	A	1165
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	ACSMKTB6	branch-connector-kit	SCP-PLUS	A	1165
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	ACSMKTB8	branch-connector-kit	SCP-PLUS	A	1165
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TB1DPK	branch-connector-kit	CCB-QMR, AV-LINE	C	1117

Breaker family	Part	Component	Equipment family	Cl.	Pg
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TB1SPK	branch-connector-kit	CCB-QMR	A	1117
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TB4SBK	branch-connector-kit	CCB-QMR, AV-LINE	C	1117
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TB4SPK	branch-connector-kit	CCB-QMR, AV-LINE	C	1117
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TB6SPK	branch-connector-kit	CCB-QMR	A	1118
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TB8SPK	branch-connector-kit	CCB-QMR, AV-LINE	C	1118
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TE13PD1	breaker-mounting-kit		A	1450
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TE13PD2	breaker-mounting-kit		A	1451
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TJ42PD1A	breaker-mounting-kit		A	1398
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TJ42PD2A	breaker-mounting-kit		A	1398
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TJ43PD1A	breaker-mounting-kit		A	1399
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TJ43PD2A	breaker-mounting-kit		A	1400
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TK62PD1A	breaker-mounting-kit		A	1417
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TK62PD2A	breaker-mounting-kit		A	1418
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TK63PD1A	breaker-mounting-kit		A	1418
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TK63PD2A	breaker-mounting-kit		A	1419
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TK82PD1A	breaker-mounting-kit		A	1419
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TK82PD2A	breaker-mounting-kit		A	1420
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TK83PD1A	breaker-mounting-kit		A	1461
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TK83PD2A	breaker-mounting-kit		A	1462
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TMP5	mounting-bracket		A	1387
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TMP6	mounting-bracket		A	1387
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TMP7	mounting-bracket		A	1388
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	565B837G1	breaker-mounting-kit		A	1388
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	565B837G2	breaker-mounting-kit		A	1389
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	571B595DDG1	breaker-mounting-kit		A	1389
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	571B595DDG2	breaker-mounting-kit		A	1389
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	75D165029P101T	insulator	NLAB	—	1155
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	HT-100	breaker-accessory	NLAB	B	1156
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	NLAB-TQC3	breaker-mounting-kit	NLAB	C	1153
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	THL103	handle-lock	A-SERIES, NLAB	A	1083

Breaker family	Part	Component	Equipment family	Cl.	Pg
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	THP100	padlock-attachment	A-SERIES, NLAB	A	1089
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	THQCFMK	fastener		A	1394
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	THQGFPLD1	padlock-attachment	A-SERIES	A	1089
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	THT104	handle-lock	A-SERIES	A	1084
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQ3HTK	handle-lock	A-SERIES	A	1084
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQ4HTK	handle-lock	A-SERIES	A	1085
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQCBMPA1	mounting-bracket		A	1390
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQCBMPA10	mounting-bracket		A	1390
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQCBMPA2	mounting-bracket		A	1391
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQCBMPA3	mounting-bracket		A	1391
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQCFMP1	mounting-bracket		A	1391
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQCFMP2	mounting-bracket		A	1392
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQCFMP3	mounting-bracket		A	1392
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQCFMP4	mounting-bracket		A	1392
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQCGFBMPA1	mounting-bracket		A	1393
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQCGFBMPA10	mounting-bracket		A	1393
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQCGFBMPA2	mounting-bracket		A	1393
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQCGFBMPA3	mounting-bracket		A	1393
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQHT1	handle-lock	A-SERIES	A	1085
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQPL	handle-lock	A-SERIES	A	1086
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQPLD1	padlock-attachment	A-SERIES, NLAB	A	1091
GHB family (480Y/277 bolt-on) (EAT)	1223C77G03	padlock-attachment	PRL1A, PRL2A, PRL1X, PRL2X	A	298
GHB family (480Y/277 bolt-on) (EAT)	1223C77G05	padlock-attachment	PRL1A, PRL2A, PRL1X, PRL2X	A	298
GHB family (480Y/277 bolt-on) (EAT)	1223C77G06	padlock-attachment	PRL1A, PRL2A, PRL1X, PRL2X	A	299
GHB family (480Y/277 bolt-on) (EAT)	1294C01H01	handle-lock	PRL1A, PRL2A, PRL1X, PRL2X	A	297
GHB family (480Y/277 bolt-on) (EAT)	1C96609	branch-connector-kit	PRL2A, PRL2X	A	319
GHB family (480Y/277 bolt-on) (EAT)	1C96620	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	246
GHB family (480Y/277 bolt-on) (EAT)	4176B69	deadfront	PRL3A, PRL3X	—	364
GHB family (480Y/277 bolt-on) (EAT)	5155C62H01	filler-plate	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	—	250
GHB family (480Y/277 bolt-on) (EAT)	5156C09	deadfront	PRL1/PRL2	—	175

Breaker family	Part	Component	Equipment family	Cl.	Pg
GHB family (480Y/277 bolt-on) (EAT)	624B375G23	fastener		—	558
GHB family (480Y/277 bolt-on) (EAT)	8703C80G05	fastener		—	559
GHB family (480Y/277 bolt-on) (EAT)	GPHBOFF	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	384
GHB family (480Y/277 bolt-on) (EAT)	KPRL2GHB	branch-connector-kit	PRL1/PRL2	C	172
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB06	branch-connector-kit	PRL3A, PRL3X, PRC	A	334
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB06-1	branch-connector-kit	PRL3A, PRC	A	336
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB12	branch-connector-kit	PRL3A, PRL3X, PRC	A	336
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB12-1	branch-connector-kit	PRL3A, PRL3X, PRC	A	337
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB18	branch-connector-kit	PRL3A, PRL3X, PRC	A	337
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB18-1	branch-connector-kit	PRL3A, PRL3X, PRC	A	338
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB24	branch-connector-kit	PRL3A, PRL3X, PRC	A	339
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB24-1	branch-connector-kit	PRL3A, PRC	A	340
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB06	branch-connector-kit	PRL3A, PRL3X	A	353
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB06-1	branch-connector-kit	PRL3A, PRL3X	A	354
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB12	branch-connector-kit	PRL3A, PRL3X	A	355
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB12-1	branch-connector-kit	PRL3A, PRL3X	A	356
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB18	branch-connector-kit	PRL3A, PRL3X	A	357
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB18-1	branch-connector-kit	PRL3A, PRL3X	A	358
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB24	branch-connector-kit	PRL3A, PRL3X	A	359
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB24-1	branch-connector-kit	PRL3A, PRL3X	A	360
GHB family (480Y/277 bolt-on) (EAT)	PRLSEBGHB	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL4X	A	243
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	21590-20241	fastener	I-LINE, QED-2	A	775
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	AL150HD	lug-kit	I-LINE, QMB, QED-2	A	713
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	CU150HD	lug-kit	I-LINE, QMB, QED-2	A	716
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	HLN4EBL	filler-plate	I-LINE, QED-2	A	744
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	HLW4EBL	filler-plate	I-LINE, QED-2	A	746
HFB (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	85
HFB (EAT)	KCDPFD	conversion-kit	CDP	A	98
ITE BQ / BQH / HBQ bolt-on (Canada) (SIE)	CDP7BQ3	branch-connector-kit	CDP-ITE	C	1471
ITE EE / EH / EF / HE breakers (SIE)	5EH2	branch-connector-kit	CDP6	C	1710
ITE EE / EH / EF / HE breakers (SIE)	EH3K	branch-connector-kit	CDP6	C	1717

Breaker family	Part	Component	Equipment family	Cl.	Pg
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	5FJ2	branch-connector-kit	CDP6	C	1710
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	5JJ2	branch-connector-kit	CDP6, NLAB	C	1710
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	CD55JJ2	branch-connector-kit	CDP-ITE	C	1470
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	CD62JJ2	branch-connector-kit	CDP-ITE, CDP6	C	1470
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	CDPFJ3	branch-connector-kit	CDP6	C	1717
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	FJ3K	branch-connector-kit	CDP6	C	1718
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	JJ3K	branch-connector-kit	CDP6	C	1718
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	21590-20241	fastener	I-LINE, QED-2	A	775
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	AL175JD	lug-kit	I-LINE, QMB, QED-2	A	714
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	AL250JD	lug-kit	I-LINE, QMB, QED-2	A	715
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	CU250JD	lug-kit	I-LINE, QMB, QED-2	A	717
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	HLN4EBL	filler-plate	I-LINE, QED-2	A	744
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	HLW4EBL	filler-plate	I-LINE, QED-2	A	746
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	343L162G11	fastener		A	1404
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	343L162G20	fastener		A	1404
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	343L564G2	hardware-kit		A	1403
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TC043	lug		A	1395
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TC063	lug		A	1395
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCAL43	lug		A	1396
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCAL47	lug		A	1396
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCAL63	lug		A	1396
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCALK343	lug-kit		A	1394
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCALK347	lug-kit		A	1394
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCALK363	lug-kit		A	1395
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCLK43	lug		A	1397
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJ42PD1A	breaker-mounting-kit		A	1398
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJ42PD2A	breaker-mounting-kit		A	1398
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJ43PC1A	breaker-mounting-kit		A	1399
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJ43PD1A	breaker-mounting-kit		A	1399
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJ43PD2A	breaker-mounting-kit		A	1400

Breaker family	Part	Component	Equipment family	Cl.	Pg
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJ62PD1A	breaker-mounting-kit		A	1400
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJ62PD2A	breaker-mounting-kit		A	1401
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJ63PC1A	breaker-mounting-kit		A	1401
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJ63PD1A	breaker-mounting-kit		A	1402
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJ63PD2A	breaker-mounting-kit		A	1402
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJKLS	barrier		A	1403
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJKPLD1	padlock-attachment	SPECTRA-PP	A	1358
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJKPLD2	padlock-attachment	SPECTRA-PP, A-SERIES-PWR	A	1359
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJLVK	breaker-accessory		A	1404
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TLC4PLD1	padlock-attachment	A-SERIES-PWR	A	1110
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TLC4PLD2	padlock-attachment	SPECTRA-PP, A-SERIES-PWR	A	1359
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TMP3	mounting-bracket		A	1403
JA (EAT)	KCDPKDB	conversion-kit	CDP	A	103
JA (EAT)	TAD3	conversion-kit	PRL4, CDP, MP40, MP2, EP	A	488
JB (EAT)	KCDPJDB	conversion-kit	CDP	A	102
JB (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	87
JD (EAT)	KCDPJD	conversion-kit	CDP	A	101
JD (EAT)	KCDPJDB	conversion-kit	CDP	A	102
JD (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	87
JD (EAT)	KPRL4JDS	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	445
JD (EAT)	KPRL4JDT	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	446
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6CLJ1	branch-connector-kit	SB, CDP6	A	1722
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6JJ61	branch-connector-kit	P5, SB, CDP6	A	1568
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6JJ62	branch-connector-kit	P5, SB, CDP6	A	1569
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SCJ1	branch-connector-kit	SB, CDP6	A	1726
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SCL61C	branch-connector-kit	CDP6, SB	A	1713
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SJL1	branch-connector-kit	P5, SB, CDP6	A	1573
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	DFFPJD01	filler-plate	RP1, P1, S1/S2, P2, P3	—	1675
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	DFFPJD02	filler-plate	RP1	—	1675
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD1	main-breaker-kit	P1	A	1475

Breaker family	Part	Component	Equipment family	Cl.	Pg
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD3	main-breaker-kit	P1	A	1476
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD3B	main-breaker-kit	RP1	A	1617
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKVA5363JD	conversion-kit	RP1	—	1687
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SCJ	branch-connector-kit	P4	A	1536
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SCJD	branch-connector-kit	P5, SB, CDP6	A	1583
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ1	branch-connector-kit	P4	A	1544
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ1D	branch-connector-kit	P5, SB, CDP6	A	1587
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ2D	branch-connector-kit	P5, SB, CDP6	A	1588
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SMBKJD1	main-breaker-kit	S1/S2, SE	A	1707
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SMBKJD3	main-breaker-kit	S1/S2, SE	A	1707
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSCJ	branch-connector-kit	P4	A	1552
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSCJD	branch-connector-kit	P5, SB	A	1593
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSJ1	branch-connector-kit	P4	A	1554
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSJ1D	branch-connector-kit	P5, SB, CDP6	A	1595
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	286A8066G1	breaker-accessory		A	1422
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	343L564G3	hardware-kit		A	1421
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	789A448G1	breaker-accessory		A	1422
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	789A448G2	breaker-accessory		A	1422
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	789A448G3	breaker-accessory		C	1422
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	SKLVK	breaker-accessory		A	1423
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	SKMSK1	hardware-kit		A	1462

Breaker family	Part	Component	Equipment family	Cl.	Pg
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	SKMSK2	hardware-kit		A	1463
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC0121	lug		A	1409
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC0131	lug		A	1409
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC041	lug		A	1410
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC061	lug		A	1410
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC081A	lug		A	1411
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC091	lug		A	1411
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL121	lug		A	1412
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL122	lug		B	1412
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL131	lug		B	1413
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL41	lug		A	1413
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL61	lug		A	1413
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL81	lug		A	1414
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL91	lug		B	1414
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK2121	lug-kit		B	1405
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK2122	lug-kit		B	1405
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK261	lug-kit		A	1406
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK281	lug-kit		A	1406
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK291	lug-kit		B	1406
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK3121	lug-kit		B	1407
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK3122	lug-kit		B	1407

Breaker family	Part	Component	Equipment family	Cl.	Pg
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK341	lug-kit		A	1407
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK361	lug-kit		A	1408
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK381	lug-kit		A	1408
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK391	lug-kit		B	1408
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK102PD1A	breaker-mounting-kit		A	1415
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK102PD2A	breaker-mounting-kit		A	1416
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK103PD1A	breaker-mounting-kit		A	1458
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK103PD2A	breaker-mounting-kit		A	1459
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK122PD1A	breaker-mounting-kit		A	1416
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK122PD2A	breaker-mounting-kit		A	1417
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK123PD1A	breaker-mounting-kit		A	1460
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK123PD2A	breaker-mounting-kit		A	1460
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK62PD1A	breaker-mounting-kit		A	1417
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK62PD2A	breaker-mounting-kit		A	1418
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK63PD1A	breaker-mounting-kit		A	1418
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK63PD2A	breaker-mounting-kit		A	1419
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK82PD1A	breaker-mounting-kit		A	1419
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK82PD2A	breaker-mounting-kit		A	1420
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK83PD1A	breaker-mounting-kit		A	1461
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TK83PD2A	breaker-mounting-kit		A	1462
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKM11	breaker-accessory		A	1423

Breaker family	Part	Component	Equipment family	Cl.	Pg
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKM12	breaker-accessory		A	1423
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKMC1	connector-strap		A	1420
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKMPLD1	padlock-attachment	SPECTRA-PP	A	1359
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TMP4	mounting-bracket		A	1421
KA (EAT)	KCDPHKD	conversion-kit	CDP	A	100
KA (EAT)	KCDPKD	conversion-kit	CDP	A	102
KA (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	89
KB (EAT)	KCDPJD	conversion-kit	CDP	A	101
KB (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	87
KD (EAT)	KCDPDK	conversion-kit	CDP	A	96
KD (EAT)	KCDPHKD	conversion-kit	CDP	A	100
KD (EAT)	KCDPKD	conversion-kit	CDP	A	102
KD (EAT)	KCDPKDB	conversion-kit	CDP	A	103
KD (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	89
KD (EAT)	KPRL4CKD	breaker-mounting-kit	PRL4, PRL4X	A	435
KD (EAT)	KPRL4KDS	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	447
KD (EAT)	KPRL4KDT	breaker-mounting-kit	PRL4, PRL4X	A	448
KD (EAT)	TAD3	conversion-kit	PRL4, CDP, MP40, MP2, EP	A	488
KI / KC frame (legacy) (SQD)	N250MKC	main-breaker-kit	NF	—	791
KI / KC frame (legacy) (SQD)	NQMB2KI	main-breaker-kit	NQ	—	821
LA (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	88
LA (EAT)	KCDPLD	conversion-kit	CDP	A	104
LA (EAT)	KPRL4LC	breaker-mounting-kit	PRL4, PRL4X	A	450
LA / LH (I-Line) (SQD)	AL400LA	lug-kit	I-LINE, QMB, QED-2	A	715
LA / LH (I-Line) (SQD)	CU400LA	lug-kit	I-LINE, QMB, QED-2	A	717
LA / LH (I-Line) (SQD)	ILCOMBLUL26W	barrier	I-LINE	A	740
LA / LH (I-Line) (SQD)	ILCOMBLUL32W	barrier	I-LINE	A	740
LA / LH (I-Line) (SQD)	ILCOMBLUL44W	barrier	I-LINE	A	740
LA / LH (I-Line) (SQD)	QMB3300LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	980
LA / LH (I-Line) (SQD)	QMB3400LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	980
LA / LH (L-frame, legacy thermal-magnetic) (SQD)	LALLC	barrier	I-LINE	—	741
LA / LH (L-frame, legacy thermal-magnetic) (SQD)	N400M	main-breaker-kit	NF	B	792
LA / LH (L-frame, legacy thermal-magnetic) (SQD)	NFLALLC	barrier	NF	—	809
LA / LH (L-frame, legacy thermal-magnetic) (SQD)	NQLALHLSC	barrier	NQ	A	849
LA / LH (L-frame, legacy thermal-magnetic) (SQD)	NQLALLC	barrier	NQ	A	850
LA / LH (L-frame, legacy thermal-magnetic) (SQD)	NQMB4LA	main-breaker-kit	NQ	A	822
LB (EAT)	KCDPKD	conversion-kit	CDP	A	102
LB (EAT)	KCDPKDB	conversion-kit	CDP	A	103
LB (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	89
LB (EAT)	TAD3	conversion-kit	PRL4, CDP, MP40, MP2, EP	A	488
LC (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	88
LC (EAT)	KCDPLD	conversion-kit	CDP	A	104

Breaker family	Part	Component	Equipment family	Cl.	Pg
LC (EAT)	KPRL4LC	breaker-mounting-kit	PRL4, PRL4X	A	450
LD (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	88
LD (EAT)	KCDPLD	conversion-kit	CDP	A	104
LD (EAT)	KPRL4LC	breaker-mounting-kit	PRL4, PRL4X	A	450
LD (EAT)	KPRL4LD	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	452
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6CLL1	branch-connector-kit	SB, CDP6	A	1724
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6LL61	branch-connector-kit	P5, SB, CDP6	A	1570
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6SCL1	branch-connector-kit	SB, CDP6	A	1727
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6SLL1	branch-connector-kit	P5, SB, CDP6	A	1574
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SCL	branch-connector-kit	P4	A	1537
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SCLD	branch-connector-kit	P5, SB, CDP6	A	1584
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SL6	branch-connector-kit	P4	A	1546
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SL6D	branch-connector-kit	P5, SB, CDP6	A	1590
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSCL	branch-connector-kit	P4	A	1553
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSCLD	branch-connector-kit	P5, SB, CDP6	A	1594
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSL6	branch-connector-kit	P4	A	1555
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSL6D	branch-connector-kit	P5, SB, CDP6	A	1596
M-frame MG/MJ (I-Line) (SQD)	ILCOMBMPUL26W	barrier	I-LINE	A	740
M-frame MG/MJ (I-Line) (SQD)	ILCOMBMPUL32W	barrier	I-LINE	A	741
M-frame MG/MJ (I-Line) (SQD)	ILCOMBMPUL44W	barrier	I-LINE	A	741
M-frame MG/MJ (I-Line) (SQD)	ILMLC2W	terminal-shield	I-LINE	A	780
M-frame MG/MJ (I-Line) (SQD)	ILMLC3W	terminal-shield	I-LINE	A	780
M-frame MG/MJ (I-Line) (SQD)	ILMLC4W	terminal-shield	I-LINE	A	781
MA (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	90
MA (EAT)	KCDPMDL	conversion-kit	CDP	A	105
MC (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	90
MC (EAT)	KCDPMDL	conversion-kit	CDP	A	105
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	6M61C	branch-connector-kit	CDP6, SB	A	1712

Breaker family	Part	Component	Equipment family	Cl.	Pg
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	6N61C	branch-connector-kit	CDP6, SB	A	1712
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	MG1D	branch-connector-kit	P4, P5, SB, CDP6	A	1525
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	NG1D	branch-connector-kit	P5, SB, CDP6	A	1576
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SLM1D	branch-connector-kit	P4, P5, SB, CDP6	A	1549
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SMND	branch-connector-kit	P5, SB, CDP6	A	1591
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SSMND	branch-connector-kit	P5, SB, CDP6	A	1597
MDL (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	90
MDL (EAT)	KCDPMDL	conversion-kit	CDP	A	105
MDL (EAT)	KPRL4MC	breaker-mounting-kit	PRL4, PRL4X	A	455
MDL (EAT)	KPRL4MD	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	456
MDL (EAT)	KPRL4X34	breaker-mounting-kit	PRL4, PRL4X	A	464
NA / NC (Stab-Lok plug-in) (FPE)	1LOK	handle-lock	NA1B, NBLP	—	1867
NA / NC (Stab-Lok plug-in) (FPE)	NCFS	filler-plate	NA1B	—	1866
NB (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	92
NB (EAT)	KCDPND	conversion-kit	CDP	A	106
NB (EAT)	KPRL4NC	breaker-mounting-kit	PRL4, PRL4X	A	457
NB (Stab-Lok bolt-on) (FPE)	1LOK	handle-lock	NA1B, NBLP	—	1867
NC (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	92
NC (EAT)	KCDPND	conversion-kit	CDP	A	106
NC (EAT)	KPRL4NC	breaker-mounting-kit	PRL4, PRL4X	A	457
ND (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	92
ND (EAT)	KCDPND	conversion-kit	CDP	A	106
ND (EAT)	KPRL4CND	breaker-mounting-kit	PRL4, PRL4X	A	436
ND (EAT)	KPRL4ND	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	458
ND (EAT)	KPRL4X35	breaker-mounting-kit	PRL4, PRL4X	A	465
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	DSLNET	branch-connector-kit	ZIN-DIST	—	1872
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	FPENEFT	branch-connector-kit	ZIN-DIST	—	1874
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	KBDP1C	branch-connector-kit	BDP	C	1850
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	KCDP-1A	branch-connector-kit	NA1B	C	1866
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	KCDP1C	branch-connector-kit	CDP	C	1855
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	NAIB-NEF	branch-connector-kit	NA1B	C	1866
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	NDPNE	branch-connector-kit	NDP	C	1868
NEB / HEB (SIE)	BBKEB32	branch-connector-kit	P3	A	1507

Breaker family	Part	Component	Equipment family	Cl.	Pg
NEB / HEB (SIE)	EBF1	filler-plate	P3, P4, P5, SB, CDP6, SBP	A	1513
NEJ / NEJH / HEJ (N-frame 225 A class) (FPE)	DSLNEJT	branch-connector-kit	ZIN-DIST	—	1872
NEJ / NEJH / HEJ (N-frame 225 A class) (FPE)	KBDP2C	branch-connector-kit	BDP	C	1850
NEJ / NEJH / HEJ (N-frame 225 A class) (FPE)	KCDP2C	branch-connector-kit	CDP	C	1856
NEJ / NEJH / HEJ (N-frame 225 A class) (FPE)	NDPNEJ	branch-connector-kit	NDP	C	1868
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	CU-NFJ	breaker-mounting-kit	FA	—	1891
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	DSLNFT	branch-connector-kit	ZIN-DIST	—	1872
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	KBDP3C	branch-connector-kit	BDP	C	1851
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	KCDP3C	branch-connector-kit	CDP	C	1856
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	NFHARDWARE	breaker-mounting-kit	CDP	—	1858
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	3TC1GG20	lug-kit		A	1752
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	3TC1Q1	lug-kit		A	1753
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	BQDHBD	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1695
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDA1	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1689
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDA1BA	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1689
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDA2	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1690
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDBA	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1690
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDST12	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1690
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDST120	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1691
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDST120AAS	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1691
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDST125	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1691
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDST24	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1692
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDST240	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1692
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDST277	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1692
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDST48	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1693
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDST480	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1693
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	CQDST600	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1693
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	FMPG1	mounting-bracket		A	1753
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	FMPG2	mounting-bracket		A	1754
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	FMPG3	mounting-bracket		A	1754
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	HPLG	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1701

Breaker family	Part	Component	Equipment family	Cl.	Pg
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	MSKG4	fastener		C	1754
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	SMMNGMK	meter-kit	SB	A	1735
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TA6GG04	lug		A	1753
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TC1Q1	lug		A	1750
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TNKG3	hardware-kit		A	1754
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TSSG3A	barrier		A	1752
NJL / HJL / NJ / NJJ (N-frame 400 A class) (FPE)	DSLNJT	branch-connector-kit	ZIN-DIST	—	1873
NJL / HJL / NJ / NJJ (N-frame 400 A class) (FPE)	KBDP4C	branch-connector-kit	BDP	C	1851
NJL / HJL / NJ / NJJ (N-frame 400 A class) (FPE)	KCDP4C	branch-connector-kit	CDP	C	1857
NM / HM / NN / NP / NK (large N-frames) (FPE)	DSLNM	branch-connector-kit	ZIN-DIST	—	1873
NM / HM / NN / NP / NK (large N-frames) (FPE)	DSLNMS	branch-connector-kit	ZIN-DIST	—	1873
NM / HM / NN / NP / NK (large N-frames) (FPE)	KBDP5C	branch-connector-kit	BDP	C	1852
NM / HM / NN / NP / NK (large N-frames) (FPE)	KCDP5C	branch-connector-kit	CDP	C	1857
NM / HM / NN / NP / NK (large N-frames) (FPE)	N32	lug-kit	FPE-SWBD, CDP	—	1869
NM / HM / NN / NP / NK (large N-frames) (FPE)	NM34	lug-kit	FPE-SWBD, CDP	—	1869
NM / HM / NN / NP / NK (large N-frames) (FPE)	NM36	lug-kit	FPE-SWBD, CDP	—	1869
NM / HM / NN / NP / NK (large N-frames) (FPE)	NM38	lug-kit	FPE-SWBD, CDP	—	1869
NM / HM / NN / NP / NK (large N-frames) (FPE)	RP211002	breaker-accessory	FPE-SWBD	—	1870
NM / HM / NN / NP / NK (large N-frames) (FPE)	RP212001	breaker-accessory	FPE-SWBD	—	1870
P-frame PG/PJ/PK/PL (I-Line) (SQD)	ILCOMBMPUL26W	barrier	I-LINE	A	740
P-frame PG/PJ/PK/PL (I-Line) (SQD)	ILCOMBMPUL32W	barrier	I-LINE	A	741
P-frame PG/PJ/PK/PL (I-Line) (SQD)	ILCOMBMPUL44W	barrier	I-LINE	A	741
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8072	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	248
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8073	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	248
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8076	deadfront	PRL3A, PRL3X	—	367
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8077	deadfront	PRL3A, PRL3X	—	367
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8078	deadfront	PRL3A, PRL3X	—	367
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8079	deadfront	PRL3A, PRL3X	—	368
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8080	deadfront	PRL3A, PRL3X	—	368
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8081	deadfront	PRL3A, PRL3X	—	368

Breaker family	Part	Component	Equipment family	Cl.	Pg
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8082	deadfront	PRL3A, PRL3X	—	369
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8083H01	filler-plate	PRL3A, PRL3X	—	370
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11A2B	main-breaker-kit	PRL1X, PRL2X	A	303
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11A2T	main-breaker-kit	PRL1X, PRL2X	A	303
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11S2B	main-breaker-kit	PRL1X, PRL2X	A	304
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11S2T	main-breaker-kit	PRL1X, PRL2X	A	304
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13A2B	main-breaker-kit	PRL1X, PRL2X	A	304
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13A2T	main-breaker-kit	PRL1X, PRL2X	A	305
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13S2B	main-breaker-kit	PRL1X, PRL2X	A	305
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13S2T	main-breaker-kit	PRL1X, PRL2X	A	305
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21A2B	main-breaker-kit	PRL1X, PRL2X	A	306
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21A2T	main-breaker-kit	PRL1X, PRL2X	A	306
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21S2B	main-breaker-kit	PRL1X, PRL2X	A	306
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21S2T	main-breaker-kit	PRL1X, PRL2X	A	307
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23A2B	main-breaker-kit	PRL1X, PRL2X	A	307
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23A2T	main-breaker-kit	PRL1X, PRL2X	A	307
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23S2B	main-breaker-kit	PRL1X, PRL2X	A	308
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23S2T	main-breaker-kit	PRL1X, PRL2X	A	308
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X21T	branch-connector-kit	PRL3X	A	419
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X22	branch-connector-kit	PRL3A, PRL3X	A	341
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X22T	branch-connector-kit	PRL3A, PRL3X	A	342
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X23	branch-connector-kit	PRL3A, PRL3X	A	343
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X23T	branch-connector-kit	PRL3A, PRL3X	A	344
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL4X12	breaker-mounting-kit	PRL4, PRL4X	A	459
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	460
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	461
Power Defense frame 2 (PDG2 / PDD2) (EAT)	PRLSEBFD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	A	243
Power Defense frame 2 (PDG2 / PDD2) (EAT)	PRLSEBPD2	barrier	PRL1X, PRL2X, PRL3X, PRL4X	A	315
Power Defense frame 2 (PDG2 / PDD2) (EAT)	PRXP4PD2FILL1	filler-plate	PRL4X	A	506
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	42C7980	deadfront	PRL3X	—	419

Breaker family	Part	Component	Equipment family	Cl.	Pg
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	42C7982	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	248
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	42C8055	deadfront	PRL3X	—	419
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41A14B	main-breaker-kit	PRL1X, PRL2X	A	308
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41A14T	main-breaker-kit	PRL1X, PRL2X	A	309
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41S14B	main-breaker-kit	PRL1X, PRL2X	A	309
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41S14T	main-breaker-kit	PRL1X, PRL2X	A	310
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43A34B	main-breaker-kit	PRL1X, PRL2X	A	310
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43A34T	main-breaker-kit	PRL1X, PRL2X	A	311
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43S34B	main-breaker-kit	PRL1X, PRL2X	A	311
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43S34T	main-breaker-kit	PRL1X, PRL2X	A	312
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB61S16B	main-breaker-kit	PRL1X, PRL2X	A	312
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB61S16T	main-breaker-kit	PRL1X, PRL2X	A	313
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB63S36B	main-breaker-kit	PRL1X, PRL2X	A	313
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB63S36T	main-breaker-kit	PRL1X, PRL2X	A	314
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KPRL4X334S	breaker-mounting-kit	PRL4, PRL4X	A	462
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KPRL4X334T	breaker-mounting-kit	PRL4, PRL4X	A	462
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KPRL4X336	breaker-mounting-kit	PRL4, PRL4X	A	463
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	PRLSEBLGKD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	A	245
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	PRLSEBPD3	barrier	PRL1X, PRL2X, PRL3X, PRL4X	A	316
Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5) (EAT)	KPRL4X34	breaker-mounting-kit	PRL4, PRL4X	A	464
Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5) (EAT)	KPRL4X35	breaker-mounting-kit	PRL4, PRL4X	A	465
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	HLN4EBL	filler-plate	I-LINE, QED-2	A	744
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	HLW4EBL	filler-plate	I-LINE, QED-2	A	746
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	N150MH	main-breaker-kit	NF	A	790
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NF250SFBH	main-breaker-kit	NF	A	793
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NF600SFBH	main-breaker-kit	NF	A	793
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NFHJLLC	barrier	NF	—	809
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQHJLSC	barrier	NQ	A	848
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQHJQLLC	barrier	NQ	A	849

Breaker family	Part	Component	Equipment family	Cl.	Pg
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQMB2HJ	main-breaker-kit	NQ	A	820
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQMB2HJ14	main-breaker-kit	NQ	A	821
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQRPLMB2HJ	deadfront	NQ	—	852
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQSFB2HJ	main-breaker-kit	NQ	A	823
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQSFB2Q	main-breaker-kit	NQ	A	824
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQSFB4HJ	main-breaker-kit	NQ	A	824
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQSFB4Q	main-breaker-kit	NQ	A	825
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	QMBHW	breaker-mounting-kit	QMB	—	930
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	S37444	hardware-kit	NQ, NQOD, NF, QMB	A	875
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	HLN4EBL	filler-plate	I-LINE, QED-2	A	744
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	HLW4EBL	filler-plate	I-LINE, QED-2	A	746
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	N250MJ	main-breaker-kit	NF	A	791
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NF250SFBJ	main-breaker-kit	NF	A	793
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NF600SFBJ	main-breaker-kit	NF	A	794
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NFHJLLC	barrier	NF	—	809
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQHJLSC	barrier	NQ	A	848
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQHJQLLC	barrier	NQ	A	849
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQMB2HJ	main-breaker-kit	NQ	A	820
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQMB2HJ14	main-breaker-kit	NQ	A	821
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQODJK	main-breaker-kit	NQOD	A	905
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQRPLMB2HJ	deadfront	NQ	—	852
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQSFB2HJ	main-breaker-kit	NQ	A	823
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQSFB2Q	main-breaker-kit	NQ	A	824
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQSFB4HJ	main-breaker-kit	NQ	A	824
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQSFB4Q	main-breaker-kit	NQ	A	825
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	QMBJW	breaker-mounting-kit	QMB	—	931
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	S37445	hardware-kit	NQ, NQOD, NF, QMB	A	875
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH62D9	box/enclosure	NQ, NF	—	865
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH62D9VWP	box/enclosure	NQ, NF	—	865
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH68D9	box/enclosure	NQ, NF	—	866

Breaker family	Part	Component	Equipment family	Cl.	Pg
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH68D9VWP	box/enclosure	NQ, NF	—	867
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH74D9	box/enclosure	NQ, NF	—	868
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH74D9VWP	box/enclosure	NQ, NF	—	868
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH80D9	box/enclosure	NQ, NF	—	869
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH80D9VWP	box/enclosure	NQ, NF	—	869
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH86D9	box/enclosure	NQ, NF	—	870
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH86D9VWP	box/enclosure	NQ, NF	—	870
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH92D9	box/enclosure	NQ, NF	—	871
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH92D9VWP	box/enclosure	NQ, NF	—	871
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	N600MPPL	main-breaker-kit	NF	A	792
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NC62VS3PNF	trim	NF	—	812
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NC68VS3PNF	trim	NF	—	812
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NC74VS3PNF	trim	NF	—	812
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NC80VS3PNF	trim	NF	—	813
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NC86VS3PNF	trim	NF	—	813
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NC92VS3PNF	trim	NF	—	813
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NF600SFBPPL	main-breaker-kit	NF	—	794
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NFPPLLLC	barrier	NF	A	810
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NFRPLMB6PPL	deadfront	NF	—	810
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NQMB6PPL	main-breaker-kit	NQ	A	823
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NQPPLLLC	barrier	NQ	A	851
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NQRPLMB6PPL	deadfront	NQ	—	852
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NQSFB6PPL	main-breaker-kit	NQ	A	825
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	PPLLC	barrier	I-LINE	—	741
PowerPacT M / P / R frame (I-Line) (SQD)	HCR12SNCT	neutral-assembly	I-LINE	—	726
PowerPacT M / P / R frame (I-Line) (SQD)	NFPPPLLC	barrier	NF	—	810
PowerPacT M / P / R frame (I-Line) (SQD)	NFRPLMB8PPMP	deadfront	NF	—	811
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQHJQLLC	barrier	NQ	A	849
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQMB2Q	main-breaker-kit	NQ	A	821
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQMB2Q14	main-breaker-kit	NQ	A	822

Breaker family	Part	Component	Equipment family	Cl.	Pg
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQODQB	main-breaker-kit	NQOD	A	905
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQQLSC	barrier	NQ	A	851
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQSFB2HJ	main-breaker-kit	NQ	A	823
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQSFB2Q	main-breaker-kit	NQ	A	824
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQSFB4HJ	main-breaker-kit	NQ	A	824
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQSFB4Q	main-breaker-kit	NQ	A	825
PowerPact L-frame LD/LG/LJ/LL/LR (I-Line) (SQD)	ILCOMBLUL26W	barrier	I-LINE	A	740
PowerPact L-frame LD/LG/LJ/LL/LR (I-Line) (SQD)	ILCOMBLUL32W	barrier	I-LINE	A	740
PowerPact L-frame LD/LG/LJ/LL/LR (I-Line) (SQD)	ILCOMBLUL44W	barrier	I-LINE	A	740
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	6QJ2	branch-connector-kit	P5, SB, CDP6	A	1572
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQ1	branch-connector-kit	P2	A	1488
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQ2	branch-connector-kit	P3	A	1508
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQRP1FK	conversion-kit	P2	—	1505
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQRP2FK	conversion-kit	P3	—	1516
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	DFFPQJ01	filler-plate	RP1, P1	—	1676
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	DFFPQJ02	filler-plate	RP1, P1	—	1677
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	SQRC	other	P4, P5, SB	—	1561
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	6QJ2	branch-connector-kit	P5, SB, CDP6	A	1572
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	CCQ225	lug-kit		A	1755
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	DFFPQJ01	filler-plate	RP1, P1	—	1676
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	DFFPQJ02	filler-plate	RP1, P1	—	1677
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	MBKQJ1A	main-breaker-kit	RP1	A	1618
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	MBKQJ3A	main-breaker-kit	RP1	A	1619
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	SMMQJMK	meter-kit	SB	A	1735
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	SQJ	branch-connector-kit	P4	A	1551
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	SQJD	branch-connector-kit	P5, SB	A	1593
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	TA1Q300	lug-kit		A	1755
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	TCIQ250	lug-kit		A	1755
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL150HD	lug-kit	I-LINE, QMB, QED-2	A	713

Breaker family	Part	Component	Equipment family	Cl.	Pg
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL175JD	lug-kit	I-LINE, QMB, QED-2	A	714
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL250JD	lug-kit	I-LINE, QMB, QED-2	A	715
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL400LA	lug-kit	I-LINE, QMB, QED-2	A	715
QMB circuit breaker units (H-, J-, L-frame) (SQD)	CU150HD	lug-kit	I-LINE, QMB, QED-2	A	716
QMB circuit breaker units (H-, J-, L-frame) (SQD)	CU250JD	lug-kit	I-LINE, QMB, QED-2	A	717
QMB circuit breaker units (H-, J-, L-frame) (SQD)	CU400LA	lug-kit	I-LINE, QMB, QED-2	A	717
QMB circuit breaker units (H-, J-, L-frame) (SQD)	QMB3300LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	980
QMB circuit breaker units (H-, J-, L-frame) (SQD)	QMB3400LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	980
QMQB fusible panelboard switch (FPE)	KFDP2C	connector-strap	FDP	C	1859
QMQB fusible panelboard switch (FPE)	KFDP3C	connector-strap	FDP	C	1859
QMQB fusible panelboard switch (FPE)	KFDP46C	connector-strap	FDP	C	1860
QMQB fusible panelboard switch (FPE)	KFDP4C	connector-strap	FDP	C	1860
QMQB fusible panelboard switch (FPE)	KFDP-5C	connector-strap	FDP, BDP	C	1860
QMQB fusible panelboard switch (FPE)	KFDP66C	connector-strap	FDP	C	1861
QMQB fusible panelboard switch (FPE)	KFDP7C	connector-strap	FDP	C	1861
QMQB fusible panelboard switch (FPE)	KFDPD16C	connector-strap	FDP	C	1861
QMQB fusible panelboard switch (FPE)	KFDPD26C	connector-strap	FDP	C	1862
QMQB fusible panelboard switch (FPE)	KFDPS16C	connector-strap	FDP	C	1862
QMQB fusible panelboard switch (FPE)	KFDPS26C	connector-strap	FDP	C	1862
QMQB fusible panelboard switch (FPE)	KFDPV7C	connector-strap	FDP	C	1863
QMQB fusible panelboard switch (FPE)	KQB3C	connector-strap	FDP	C	1863
QMQB fusible panelboard switch (FPE)	KQB46C	connector-strap	FDP	C	1863
QMQB fusible panelboard switch (FPE)	KQB4C	connector-strap	FDP	C	1864
QMQB fusible panelboard switch (FPE)	KQB66C	connector-strap	FDP	C	1864
QMQB fusible panelboard switch (FPE)	KQB86C	connector-strap	FDP	C	1864
QMQB fusible panelboard switch (FPE)	KQB-D26C	connector-strap	FDP	C	1864
QMQB fusible panelboard switch (FPE)	PK103T	connector-strap	FDP	C	1865
QO (plug-on) (SQD)	GFI2PA	padlock-attachment	NQ, NQOD, NQOB	A	885
QO (plug-on) (SQD)	HLO-1	handle-lock	NQ, NQOD, NEHB, NQOB, NA1B, NH1B	A	883
QO (plug-on) (SQD)	HQO306	breaker-mounting-kit	I-LINE, QED-2	—	718
QO (plug-on) (SQD)	NQ100AN	lug	NQ	—	837
QO (plug-on) (SQD)	NQ200AN	lug	NQ	A	837

Breaker family	Part	Component	Equipment family	Cl.	Pg
QO (plug-on) (SQD)	NQFP15	filler-plate	NQ	—	852
QO (plug-on) (SQD)	PK2MB	hardware-kit		A	1001
QO (plug-on) (SQD)	PK3MB	hardware-kit		A	1001
QO (plug-on) (SQD)	PK4MB2HA	hardware-kit		A	1002
QO (plug-on) (SQD)	PK4MB2LA	hardware-kit		A	1002
QO (plug-on) (SQD)	PK5RK	hardware-kit		A	1003
QO (plug-on) (SQD)	Q1150AN	lug	NQ	—	837
QO (plug-on) (SQD)	QO1HPL	padlock-attachment	NQ, NQOD, NQOB	A	885
QO (plug-on) (SQD)	QO-1HT	breaker-accessory	NQ, NQOD, NQOB	A	881
QO (plug-on) (SQD)	QO1LO	handle-lock	NQ, NQOD, NQOB	A	883
QO (plug-on) (SQD)	QO-1PA	padlock-attachment	NQ, NQOD, NQOB	A	886
QO (plug-on) (SQD)	QO1PAF	padlock-attachment	NQ, NQOD, NQOB	A	886
QO (plug-on) (SQD)	QO-1PL	padlock-attachment	NQ, NQOD, NQOB	A	886
QO (plug-on) (SQD)	QO2DTI	breaker-accessory	NQ, NQOD, NQOB	A	882
QO (plug-on) (SQD)	QO2DTIM	hardware-kit	NQ, NQOD, NQOB	A	874
QO (plug-on) (SQD)	QO2PAF	padlock-attachment	NQ, NQOD, NQOB	A	887
QO (plug-on) (SQD)	QO3HT	handle-lock	NQ, NQOD, NQOB	A	884
QO (plug-on) (SQD)	QO70AN	lug	NQ, NF	—	837
QO (plug-on) (SQD)	QOADV1PAF	padlock-attachment	NQ, NQOD, NQOB	A	887
QO (plug-on) (SQD)	QOFSBF12	filler-plate	NQ	A	853
QO (plug-on) (SQD)	QOFSHALB12	terminal-shield	NQ	A	882
QO (plug-on) (SQD)	QOFSLALB12	terminal-shield	NQ	A	882
QO (plug-on) (SQD)	QOGFI2PAF	padlock-attachment	NQ, NQOD, NQOB	A	887
QO (plug-on) (SQD)	QOHPL	padlock-attachment	NQ, NQOD, NQOB	A	887
QO (plug-on) (SQD)	QOTHPA	padlock-attachment	NQ, NQOD, NQOB	A	888
QO (plug-on) (SQD)	QOTHT	handle-lock	NQ, NQOD, NQOB	A	884
QO (plug-on) (SQD)	SKNQBC	branch-connector-kit	NQ	—	838
QO (plug-on) (SQD)	SKNQOD225	branch-connector-kit	NQOD	—	906
QOB (bolt-on) (SQD)	GFI2PA	padlock-attachment	NQ, NQOD, NQOB	A	885
QOB (bolt-on) (SQD)	HLO-1	handle-lock	NQ, NQOD, NEHB, NQOB, NA1B, NH1B	A	883
QOB (bolt-on) (SQD)	NQ100AN	lug	NQ	—	837
QOB (bolt-on) (SQD)	NQ200AN	lug	NQ	A	837
QOB (bolt-on) (SQD)	NQFP15	filler-plate	NQ	—	852
QOB (bolt-on) (SQD)	NQODBFMB20	barrier	NQ, NQOD	—	851
QOB (bolt-on) (SQD)	PK2MB	hardware-kit		A	1001
QOB (bolt-on) (SQD)	PK3MB	hardware-kit		A	1001
QOB (bolt-on) (SQD)	PK4MB2HA	hardware-kit		A	1002
QOB (bolt-on) (SQD)	PK4MB2LA	hardware-kit		A	1002
QOB (bolt-on) (SQD)	PK5RK	hardware-kit		A	1003
QOB (bolt-on) (SQD)	Q1150AN	lug	NQ	—	837
QOB (bolt-on) (SQD)	QO1HPL	padlock-attachment	NQ, NQOD, NQOB	A	885
QOB (bolt-on) (SQD)	QO-1HT	breaker-accessory	NQ, NQOD, NQOB	A	881
QOB (bolt-on) (SQD)	QO1LO	handle-lock	NQ, NQOD, NQOB	A	883
QOB (bolt-on) (SQD)	QO-1PA	padlock-attachment	NQ, NQOD, NQOB	A	886
QOB (bolt-on) (SQD)	QO1PAF	padlock-attachment	NQ, NQOD, NQOB	A	886
QOB (bolt-on) (SQD)	QO1PJ15	breaker-accessory	NQ	—	881
QOB (bolt-on) (SQD)	QO-1PL	padlock-attachment	NQ, NQOD, NQOB	A	886
QOB (bolt-on) (SQD)	QO2DTI	breaker-accessory	NQ, NQOD, NQOB	A	882
QOB (bolt-on) (SQD)	QO2DTIM	hardware-kit	NQ, NQOD, NQOB	A	874
QOB (bolt-on) (SQD)	QO2PAF	padlock-attachment	NQ, NQOD, NQOB	A	887
QOB (bolt-on) (SQD)	QO3HT	handle-lock	NQ, NQOD, NQOB	A	884

Breaker family	Part	Component	Equipment family	Cl.	Pg
QOB (bolt-on) (SQD)	QO70AN	lug	NQ, NF	—	837
QOB (bolt-on) (SQD)	QOADV1PAF	padlock-attachment	NQ, NQOD, NQOB	A	887
QOB (bolt-on) (SQD)	QOB2125SL	sub-feed-lug-kit	NQ	—	833
QOB (bolt-on) (SQD)	QOB3125SL	sub-feed-lug-kit	NQ	—	834
QOB (bolt-on) (SQD)	QOBRT	hardware-kit	NQ	—	874
QOB (bolt-on) (SQD)	QOFSBF12	filler-plate	NQ	A	853
QOB (bolt-on) (SQD)	QOFSHALB12	terminal-shield	NQ	A	882
QOB (bolt-on) (SQD)	QOFSLALB12	terminal-shield	NQ	A	882
QOB (bolt-on) (SQD)	QOGFI2PAF	padlock-attachment	NQ, NQOD, NQOB	A	887
QOB (bolt-on) (SQD)	QOHPL	padlock-attachment	NQ, NQOD, NQOB	A	887
QOB (bolt-on) (SQD)	QOTHPA	padlock-attachment	NQ, NQOD, NQOB	A	888
QOB (bolt-on) (SQD)	QOTHT	handle-lock	NQ, NQOD, NQOB	A	884
QOB (bolt-on) (SQD)	SKNQBC	branch-connector-kit	NQ	—	838
QOB (bolt-on) (SQD)	SKNQOD225	branch-connector-kit	NQOD	—	906
QR2 / QRH2 / HQR2 (250A frame) (SIE)	3TA1QR300	lug-kit		A	1756
QR2 / QRH2 / HQR2 (250A frame) (SIE)	3TC1QR250	lug-kit		A	1757
QR2 / QRH2 / HQR2 (250A frame) (SIE)	A01QR2	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1689
QR2 / QRH2 / HQR2 (250A frame) (SIE)	A02QR2	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1689
QR2 / QRH2 / HQR2 (250A frame) (SIE)	CCQ250	lug		A	1758
QR2 / QRH2 / HQR2 (250A frame) (SIE)	HBLQR	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1697
QR2 / QRH2 / HQR2 (250A frame) (SIE)	HPLQR	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1702
QR2 / QRH2 / HQR2 (250A frame) (SIE)	MBKQR1A	main-breaker-kit	RP1	A	1619
QR2 / QRH2 / HQR2 (250A frame) (SIE)	MBKQR3A	main-breaker-kit	RP1	A	1620
QR2 / QRH2 / HQR2 (250A frame) (SIE)	MSQR3	fastener		A	1758
QR2 / QRH2 / HQR2 (250A frame) (SIE)	S01QR2	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1694
QR2 / QRH2 / HQR2 (250A frame) (SIE)	S07QR2	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1694
QR2 / QRH2 / HQR2 (250A frame) (SIE)	SBMIQR	breaker-accessory	RP1, P1, P2, P3, S1/S2	A	1695
QR2 / QRH2 / HQR2 (250A frame) (SIE)	TA1QR300	lug-kit		A	1757
QR2 / QRH2 / HQR2 (250A frame) (SIE)	TC1QR250	lug-kit		A	1757
QR2 / QRH2 / HQR2 / HQR2H (SIE)	6QR2	branch-connector-kit	P4, P5, SB, CDP6	A	1520
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQR1	branch-connector-kit	P2	A	1488
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQR2	branch-connector-kit	P3	A	1509
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQRP1FK	conversion-kit	P2	—	1505
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQRP2FK	conversion-kit	P3	—	1516
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR1	main-breaker-kit	P1, S1/S2	A	1477
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR1A	main-breaker-kit	RP1	A	1619

Breaker family	Part	Component	Equipment family	Cl.	Pg
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR3	main-breaker-kit	P1, S1/S2	A	1478
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR3A	main-breaker-kit	RP1	A	1620
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQRFK	filler-plate	RP1, P1	—	1679
QR2 / QRH2 / HQR2 / HQR2H (SIE)	P2QRFP01	filler-plate	P2	—	1503
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQR	branch-connector-kit	P4, P5, SB	A	1551
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQRC	other	P4, P5, SB	—	1561
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQRD	branch-connector-kit	P4, P5, SB	A	1552
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	1256C42G01	handle-lock	PRL1A, PRL2A, PRL3A	A	296
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	1256C42G02	handle-lock	PRL1A, PRL2A, PRL3A	A	296
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	1C96608	branch-connector-kit	PRL1A, PRL1X	A	235
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	1C96619	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	246
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	4176B67	deadfront	PRL3A, PRL3X	—	363
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	5155C62H01	filler-plate	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	—	250
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	5156C10	deadfront	PRL1/PRL2	—	175
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL1BAB	branch-connector-kit	PRL1/PRL2	C	172
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA06	branch-connector-kit	PRL3A, PRL3X, PRC	A	325
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA06-1	branch-connector-kit	PRL3A, PRL3X, PRC	A	326
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA12	branch-connector-kit	PRL3A, PRL3X, PRC	A	327
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA12-1	branch-connector-kit	PRL3A, PRL3X, PRC	A	328
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA18	branch-connector-kit	PRL3A, PRL3X, PRC	A	329
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA18-1	branch-connector-kit	PRL3A, PRL3X, PRC	A	329
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA24	branch-connector-kit	PRL3A, PRL3X, PRC	A	330
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA24-1	branch-connector-kit	PRL3A, PRC	A	331
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA06	branch-connector-kit	PRL3A, PRL3X	A	345
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA06-1	branch-connector-kit	PRL3A, PRL3X	A	346
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA12	branch-connector-kit	PRL3A, PRL3X	A	347
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA12-1	branch-connector-kit	PRL3A, PRL3X	A	348
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA18	branch-connector-kit	PRL3A, PRL3X	A	349
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA18-1	branch-connector-kit	PRL3A, PRL3X	A	350
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA24	branch-connector-kit	PRL3A, PRL3X	A	351

Breaker family	Part	Component	Equipment family	Cl.	Pg
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA24-1	branch-connector-kit	PRL3A, PRL3X	A	352
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	QL123PL	padlock-attachment	PRL1A, PRL2A, PRL1X, PRL2X	A	299
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	QL123PLOFF	padlock-attachment	PRL1A, PRL2A, PRL1X, PRL2X	A	300
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	QL1HT	handle-lock	PRL1A, PRL2A, PRL1X, PRL2X	A	297
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	QL1NPL	handle-lock	PRL1A, PRL2A, PRL1X, PRL2X	A	297
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	QL1PL	padlock-attachment	PRL1A, PRL2A, PRL1X, PRL2X	A	300
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	QL23NPL	handle-lock	PRL1A, PRL2A, PRL1X, PRL2X	A	297
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	QLBHTSE	fastener	PRL1A, PRL2A, PRL1X, PRL2X	—	290
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	QLLDTSA	fastener	PRL1A, PRL2A, PRL1X, PRL2X	—	290
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	QLLDTSB	fastener	PRL1A, PRL2A, PRL1X, PRL2X	—	290
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	QLLDTSC	fastener	PRL1A, PRL2A, PRL1X, PRL2X	—	290
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	QLLNTSFG	fastener	PRL1A, PRL2A, PRL1X, PRL2X	—	291
QUICKLAG plug-on (HQP/QPHW family) (EAT)	2C11642	branch-connector-kit	PRL1A, PRL1X	A	236
QUICKLAG plug-on (HQP/QPHW family) (EAT)	5155C62H01	filler-plate	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	—	250
QUICKLAG plug-on (HQP/QPHW family) (EAT)	QL123PL	padlock-attachment	PRL1A, PRL2A, PRL1X, PRL2X	A	299
QUICKLAG plug-on (HQP/QPHW family) (EAT)	QL123PLOFF	padlock-attachment	PRL1A, PRL2A, PRL1X, PRL2X	A	300
QUICKLAG plug-on (HQP/QPHW family) (EAT)	QL1HT	handle-lock	PRL1A, PRL2A, PRL1X, PRL2X	A	297
QUICKLAG plug-on (HQP/QPHW family) (EAT)	QL1NPL	handle-lock	PRL1A, PRL2A, PRL1X, PRL2X	A	297
QUICKLAG plug-on (HQP/QPHW family) (EAT)	QL1PL	padlock-attachment	PRL1A, PRL2A, PRL1X, PRL2X	A	300
QUICKLAG plug-on (HQP/QPHW family) (EAT)	QL23NPL	handle-lock	PRL1A, PRL2A, PRL1X, PRL2X	A	297
QUICKLAG plug-on (HQP/QPHW family) (EAT)	QLBHTSE	fastener	PRL1A, PRL2A, PRL1X, PRL2X	—	290
QUICKLAG plug-on (HQP/QPHW family) (EAT)	QLLDTSA	fastener	PRL1A, PRL2A, PRL1X, PRL2X	—	290
QUICKLAG plug-on (HQP/QPHW family) (EAT)	QLLDTSB	fastener	PRL1A, PRL2A, PRL1X, PRL2X	—	290
QUICKLAG plug-on (HQP/QPHW family) (EAT)	QLLDTSC	fastener	PRL1A, PRL2A, PRL1X, PRL2X	—	290
QUICKLAG plug-on (HQP/QPHW family) (EAT)	QLLNTSFG	fastener	PRL1A, PRL2A, PRL1X, PRL2X	—	291
R-frame RG/RJ/RK/RL (I-Line) (SQD)	HCR12SNCT	neutral-assembly	I-LINE	—	726
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	1109
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5700P86	mounting-bracket	A-SERIES-PWR	—	1106
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	1102
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	1102

Breaker family	Part	Component	Equipment family	Cl.	Pg
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	1103
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AFP2FBD	filler-plate	SPECTRA-PP	A	1316
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AFP3FBD	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1318
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AHKBFB1	hardware-kit	SPECTRA-PP	A	1338
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMC6FBFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1273
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMCB4FBFP	branch-connector-kit	SPECTRA-PP	A	1230
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMCB6FBFP	branch-connector-kit	SPECTRA-PP	A	1240
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPFB12P	breaker-mounting-kit	A-SERIES	—	1065
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPFB3P	breaker-mounting-kit	A-SERIES	—	1066
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPFBRD3P	breaker-mounting-kit	RG-LIGHTING	A	1159
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPP6FB6D	branch-connector-kit	A-SERIES-PWR	A	1098
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	TEDFP1	filler-plate	A-SERIES	—	1070
Record Plus FB 100 (GEA)	FABAM01W	breaker-accessory	A-SERIES	A	1075
Record Plus FB 100 (GEA)	FABAM10W	breaker-accessory	A-SERIES	A	1075
Record Plus FB 100 (GEA)	FAS01LW	breaker-accessory	A-SERIES	A	1075
Record Plus FB 100 (GEA)	FAS01RW	breaker-accessory	A-SERIES	A	1076
Record Plus FB 100 (GEA)	FAS10LW	breaker-accessory	A-SERIES	A	1076
Record Plus FB 100 (GEA)	FAS10RW	breaker-accessory	A-SERIES	A	1076
Record Plus FB 100 (GEA)	FASHT7W	breaker-accessory	A-SERIES	A	1077
Record Plus FB 100 (GEA)	FASHTBW	breaker-accessory	A-SERIES	A	1077
Record Plus FB 100 (GEA)	FASHTDW	breaker-accessory	A-SERIES	A	1077
Record Plus FB 100 (GEA)	FASHTFW	breaker-accessory	A-SERIES	A	1078
Record Plus FB 100 (GEA)	FASHTJW	breaker-accessory	A-SERIES	A	1078
Record Plus FB 100 (GEA)	FASHTKW	breaker-accessory	A-SERIES	A	1078
Record Plus FB 100 (GEA)	FASHTNW	breaker-accessory	A-SERIES	A	1079
Record Plus FB 100 (GEA)	FASHTUW	breaker-accessory	A-SERIES	A	1079
Record Plus FB 100 (GEA)	FAUVR7W	breaker-accessory	A-SERIES	A	1079
Record Plus FB 100 (GEA)	FAUVRDW	breaker-accessory	A-SERIES	A	1080
Record Plus FB 100 (GEA)	FAUVRFW	breaker-accessory	A-SERIES	A	1080
Record Plus FB 100 (GEA)	FAUVRJW	breaker-accessory	A-SERIES	A	1080
Record Plus FB 100 (GEA)	FAUVRNW	breaker-accessory	A-SERIES	A	1080
Record Plus FB 100 (GEA)	FAUVRUW	breaker-accessory	A-SERIES	A	1081
Record Plus FB 100 (GEA)	FB1PE	padlock-attachment	A-SERIES	A	1087
Record Plus FB 100 (GEA)	FB1PF	padlock-attachment	A-SERIES	A	1087
Record Plus FB 100 (GEA)	FCAL12	lug		A	1425
Record Plus FB 100 (GEA)	FCAL13	lug		A	1425
Record Plus FB 100 (GEA)	FCAL14	lug		A	1425
Record Plus FB 100 (GEA)	FCALK12	lug-kit		A	1424
Record Plus FB 100 (GEA)	FCALK13	lug-kit		A	1424
Record Plus FB 100 (GEA)	FCALK14	lug-kit		A	1424
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AHKBFD1	hardware-kit	SPECTRA-PP	A	1338

Breaker family	Part	Component	Equipment family	Cl.	Pg
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AHKFD1	hardware-kit	SPECTRA-PP	A	1341
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC4FDBFP	breaker-mounting-kit	SPECTRA-PP	A	1263
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC4FDSFP	breaker-mounting-kit	SPECTRA-PP	A	1263
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC6FDBFP	breaker-mounting-kit	SPECTRA-PP	A	1274
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC6FDSPF	breaker-mounting-kit	SPECTRA-PP	A	1274
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMCB4FDBFP	branch-connector-kit	SPECTRA-PP	A	1231
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMCB6FDBFP	branch-connector-kit	SPECTRA-PP	A	1241
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	FCDDF1	breaker-mounting-kit		A	1426
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	FCDDF2	breaker-mounting-kit		A	1427
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	FCDDF3	breaker-mounting-kit		A	1427
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	FCDDF4	breaker-mounting-kit		A	1428
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	FCDMP	mounting-bracket		A	1428
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	FCDSD	breaker-accessory		A	1430
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	FCDSDB	breaker-accessory		A	1430
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	FCDSDP	breaker-accessory		A	1430
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	FCMSK3	hardware-kit		A	1429
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	FCMSK4	hardware-kit		A	1429
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	FCNP3	fastener		A	1429
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	FCNPB	fastener		A	1429
Record Plus FC 100 (GEA)	FABAM01W	breaker-accessory	A-SERIES	A	1075
Record Plus FC 100 (GEA)	FABAM10W	breaker-accessory	A-SERIES	A	1075
Record Plus FC 100 (GEA)	FAS01LW	breaker-accessory	A-SERIES	A	1075
Record Plus FC 100 (GEA)	FAS01RW	breaker-accessory	A-SERIES	A	1076
Record Plus FC 100 (GEA)	FAS10LW	breaker-accessory	A-SERIES	A	1076
Record Plus FC 100 (GEA)	FAS10RW	breaker-accessory	A-SERIES	A	1076

Breaker family	Part	Component	Equipment family	Cl.	Pg
Record Plus FC 100 (GEA)	FASHT7W	breaker-accessory	A-SERIES	A	1077
Record Plus FC 100 (GEA)	FASHTBW	breaker-accessory	A-SERIES	A	1077
Record Plus FC 100 (GEA)	FASHTDW	breaker-accessory	A-SERIES	A	1077
Record Plus FC 100 (GEA)	FASHTFW	breaker-accessory	A-SERIES	A	1078
Record Plus FC 100 (GEA)	FASHTJW	breaker-accessory	A-SERIES	A	1078
Record Plus FC 100 (GEA)	FASHTKW	breaker-accessory	A-SERIES	A	1078
Record Plus FC 100 (GEA)	FASHTNW	breaker-accessory	A-SERIES	A	1079
Record Plus FC 100 (GEA)	FASHTUW	breaker-accessory	A-SERIES	A	1079
Record Plus FC 100 (GEA)	FAUVR7W	breaker-accessory	A-SERIES	A	1079
Record Plus FC 100 (GEA)	FAUVRDW	breaker-accessory	A-SERIES	A	1080
Record Plus FC 100 (GEA)	FAUVRFW	breaker-accessory	A-SERIES	A	1080
Record Plus FC 100 (GEA)	FAUVRJW	breaker-accessory	A-SERIES	A	1080
Record Plus FC 100 (GEA)	FAUVRNW	breaker-accessory	A-SERIES	A	1080
Record Plus FC 100 (GEA)	FAUVRUW	breaker-accessory	A-SERIES	A	1081
Record Plus FC 100 (GEA)	FC1PE	padlock-attachment	A-SERIES	A	1087
Record Plus FC 100 (GEA)	FC1PF	padlock-attachment	A-SERIES	A	1087
Record Plus FC 100 (GEA)	FCAL12	lug		A	1425
Record Plus FC 100 (GEA)	FCAL13	lug		A	1425
Record Plus FC 100 (GEA)	FCAL14	lug		A	1425
Record Plus FC 100 (GEA)	FCALK12	lug-kit		A	1424
Record Plus FC 100 (GEA)	FCALK13	lug-kit		A	1424
Record Plus FC 100 (GEA)	FCALK14	lug-kit		A	1424
Record Plus FC 100 (GEA)	FCPLD	padlock-attachment	SPECTRA-PP	A	1356
Record Plus FE 250 (GEA)	10083889P19	deadfront	SPECTRA-PP, SPECTRA-SB	A	1288
Record Plus FE 250 (GEA)	10083889P20	deadfront	SPECTRA-PP, SPECTRA-SB	A	1289
Record Plus FE 250 (GEA)	10083889P21	deadfront	SPECTRA-PP, SPECTRA-SB	A	1289
Record Plus FE 250 (GEA)	10083889P28	deadfront	SPECTRA-PP, SPECTRA-SB	A	1289
Record Plus FE 250 (GEA)	10083889P29	deadfront	SPECTRA-PP, SPECTRA-SB	A	1290
Record Plus FE 250 (GEA)	10083889P30	deadfront	SPECTRA-PP, SPECTRA-SB	A	1290
Record Plus FE 250 (GEA)	10096990P1	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1293
Record Plus FE 250 (GEA)	FCAL15	lug		A	1432
Record Plus FE 250 (GEA)	FCAL16	lug		A	1432
Record Plus FE 250 (GEA)	FCALK15	lug-kit		A	1431
Record Plus FE 250 (GEA)	FCALK15LV	lug-kit		A	1431
Record Plus FE 250 (GEA)	FCALK16	lug-kit		A	1431
Record Plus FE 250 (GEA)	FCALK16LV	lug-kit		A	1432
Record Plus FE 250 (GEA)	FE1PE	padlock-attachment	A-SERIES	A	1087
Record Plus FE 250 (GEA)	FEMSK1	fastener	A-SERIES	A	1073
Record Plus FE 250 (GEA)	FEMSK2	hardware-kit		A	1433
Record Plus FE 250 (GEA)	FEMSK3	hardware-kit		A	1433
Record Plus FE 250 (GEA)	FEMSK4	hardware-kit		A	1433
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AFP4FGD	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1321
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AFP4FGS	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1322
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AHKBFG1	hardware-kit	SPECTRA-PP	A	1338
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AHKFG1	hardware-kit	SPECTRA-PP	A	1341

Breaker family	Part	Component	Equipment family	Cl.	Pg
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC2FGMFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1250
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC3FGMFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1256
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC4FGBFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1264
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC6FGBFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1275
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB2FGMFP	branch-connector-kit	SPECTRA-PP	A	1217
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB3FGMFP	branch-connector-kit	SPECTRA-PP	A	1222
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB4FGBFP	branch-connector-kit	SPECTRA-PP	A	1231
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB6FGBFP	branch-connector-kit	SPECTRA-PP	A	1241
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	FGMSK1	hardware-kit		A	1434
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	FGMSK2	hardware-kit		A	1434
Record Plus FG 600 (GEA)	FCALK218H	lug-kit		A	1434
Record Plus FG 600 (GEA)	FCALK318H	lug-kit		A	1435
Record Plus FG 600 (GEA)	FG1PE	padlock-attachment	SPECTRA-PP	A	1356
Record Plus FG 600 (GEA)	FGH1LCK	breaker-accessory		A	1435
Record Plus FG 600 (GEA)	FGJN3	breaker-accessory		A	1436
Record Plus FG 600 (GEA)	FGJS3	barrier		A	1435
Record Plus FG 600 (GEA)	FGPLD	padlock-attachment	SPECTRA-PP	A	1356
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	6CLE2	branch-connector-kit	P5, SB, CDP6	A	1563
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	6E62	branch-connector-kit	P5, SB, CDP6	A	1565
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	CCE125	lug		A	1759
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	DFFPED01	filler-plate	RP1, P1	—	1673
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	E2HBL	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1696
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	ED2HPL	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1701
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	LD1E060	lug		A	1759
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	LD1E100	lug		A	1760
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	LN1E100	lug		A	1760
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	MSE6-100	fastener		A	1765
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	PC2637	breaker-mounting-kit		A	1763
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	PC2638	breaker-mounting-kit		A	1763

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	PC2657	breaker-mounting-kit		A	1763
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	PC2658	breaker-mounting-kit		A	1763
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	PM2657	breaker-mounting-kit		A	1764
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	PM2658	breaker-mounting-kit		A	1764
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	QF3	filler-plate	P1, P2, P3, SB, CDP6, SBP	A	1482
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	RS2641	breaker-accessory		A	1765
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	RS2642	breaker-accessory		A	1766
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	RS2643	breaker-accessory		A	1766
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	RS2644	breaker-accessory		A	1767
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	SA1E025	lug		A	1761
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	SMMCEMK	meter-kit	SB	A	1734
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	SMMEDMK	meter-kit	SB	A	1734
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	TA1E6125	lug		A	1761
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	TA6ED06	lug		A	1762
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	TC1ED6150	lug		A	1762
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	TCE2	breaker-mounting-kit		A	1764
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	TCE3	breaker-mounting-kit		A	1764
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	6CLF1	branch-connector-kit	SB, CDP6	A	1721
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	6F62	branch-connector-kit	P5, SB, CDP6	A	1567
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	CCF250	lug		A	1768
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	DFFPFD01	filler-plate	RP1, P1, S1/S2, SE, P2, P3	—	1674
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	FD6HB1	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1697
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	FD6PL1	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1701
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	MSF6-50	fastener		A	1771
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	PC4753	breaker-mounting-kit		A	1770
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	PC4754	breaker-mounting-kit		A	1770
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	PM4754	breaker-mounting-kit		A	1770
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	PSFFJ6	sub-feed-lug-kit	SBP	—	1741
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	RS4755	breaker-accessory		A	1771
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	RS4756	breaker-accessory		A	1772

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	SMMFDMK	meter-kit	SB	A	1734
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	TA1FD350A	lug		A	1768
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	TA6FD04	lug		A	1769
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	TC1FD350	lug		A	1769
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	TCF2	breaker-mounting-kit		A	1770
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	TCF3	breaker-mounting-kit		A	1770
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	6CLJ1	branch-connector-kit	SB, CDP6	A	1722
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	6JJ61	branch-connector-kit	P5, SB, CDP6	A	1568
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	6JJ62	branch-connector-kit	P5, SB, CDP6	A	1569
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	6SCJ1	branch-connector-kit	SB, CDP6	A	1726
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	6SJL1	branch-connector-kit	P5, SB, CDP6	A	1573
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	CCL600	lug		A	1774
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	CLRSJL2	terminal-shield		—	1781
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	CLRSJL3	barrier		A	1779
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	JD6HBL	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1697
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	JD6HPL	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1702
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	JDTERMSHIELD	barrier		A	1779
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	LK11750	lug-kit		A	1772
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	LK12500	lug-kit		A	1773
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	LK31750	lug-kit		A	1773
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	LK32500	lug-kit		A	1773
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	MSJ6	fastener		A	1780
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	PC5777	breaker-mounting-kit		A	1778

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	PC5778	breaker-mounting-kit		A	1778
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	PSFJL6	sub-feed-lug-kit	SBP	—	1741
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	RS5773	breaker-accessory		A	1780
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	RS5774	breaker-accessory		A	1781
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	SJ1	branch-connector-kit	P4	A	1544
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	SJ2D	branch-connector-kit	P5, SB, CDP6	A	1588
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	SSCJ	branch-connector-kit	P4	A	1552
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	SSCJD	branch-connector-kit	P5, SB	A	1593
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	SSJ1	branch-connector-kit	P4	A	1554
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA1L6750	lug		A	1775
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA2J630	lug		A	1775
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA2J6500	lug		A	1776
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA2J6500T10	lug-kit		A	1773
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA6JD20	lug		A	1776
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TC1J6600	lug		A	1777
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TC2J6500	lug		A	1777
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TCJ2	breaker-mounting-kit		A	1778
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TCJ3	breaker-mounting-kit		A	1779
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	6CLL1	branch-connector-kit	SB, CDP6	A	1724
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	6LL61	branch-connector-kit	P5, SB, CDP6	A	1570
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	6SCL1	branch-connector-kit	SB, CDP6	A	1727

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	6SLL1	branch-connector-kit	P5, SB, CDP6	A	1574
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	CCL600	lug		A	1774
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	CLRSJL2	terminal-shield		—	1781
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	CLRSJL3	barrier		A	1779
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	JD6HBL	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1697
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	JD6HPL	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1702
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	JDTERMSHIELD	barrier		A	1779
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	LK11750	lug-kit		A	1772
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	LK12500	lug-kit		A	1773
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	LK31750	lug-kit		A	1773
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	LK32500	lug-kit		A	1773
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	MSJ6	fastener		A	1780
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	PC5660	breaker-mounting-kit		A	1782
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	PC5661	breaker-mounting-kit		A	1782
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	RS5783	breaker-accessory		A	1783
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	RS5784	breaker-accessory		A	1783
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	SL6	branch-connector-kit	P4	A	1546
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	SSL6	branch-connector-kit	P4	A	1555
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TA1L6750	lug		A	1775
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TA2J6500	lug		A	1776
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TA2J6500T10	lug-kit		A	1773

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TA6JD20	lug		A	1776
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TC1J6600	lug		A	1777
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TC2J6500	lug		A	1777
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TCJ2	breaker-mounting-kit		A	1778
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TCJ3	breaker-mounting-kit		A	1779
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	JD6HBL	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1697
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	JD6HPL	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1702
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	RS5787	breaker-accessory		A	1786
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	RS5788	breaker-accessory		A	1786
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	SLM1D	branch-connector-kit	P4, P5, SB, CDP6	A	1549
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	TA2K500	lug		A	1784
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	TA3K500	lug		A	1785
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	TC2K500	lug		A	1785
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	2TA2N8750	lug-kit		A	1788
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	2TA3N8750	lug-kit		A	1788
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	2TA4N8500	lug-kit		A	1789
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	2TA4P8500	lug-kit		A	1789
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	3TA2N8750	lug-kit		A	1789
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	3TA3N8750	lug-kit		A	1790
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	3TA4N8500	lug-kit		A	1790
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	3TA4P8500	lug-kit		A	1790
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	CCM800	lug-kit		A	1791
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	CCM800K2	lug-kit		A	1791
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	CCM800K3	lug-kit		A	1791

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	CS3637R	connector-strap	P5	A	1598
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	CS3638R	connector-strap	P5	A	1598
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	CS3639R	connector-strap	P5	A	1599
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	EX11	breaker-accessory	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1694
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	LK13500	lug-kit		A	1792
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	LK13750	lug-kit		A	1792
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	LK14500	lug-kit		A	1792
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	LK33500	lug-kit		A	1792
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	LK33750	lug-kit		A	1793
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	LK34500	lug-kit		A	1793
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	MDTERMSHIELD	barrier		A	1799
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	MN6BL	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1698
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	MN6PLD	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1702
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	NDTS	barrier		A	1800
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	PC5662	breaker-mounting-kit		A	1797
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	PC5663	breaker-mounting-kit		A	1797
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	PC5664	breaker-mounting-kit		A	1797
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	PC5665	breaker-mounting-kit		A	1797
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	PC5666	breaker-mounting-kit		A	1798
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	PC5667	breaker-mounting-kit		A	1798
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	PM5663	breaker-mounting-kit		A	1798

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	PM5666	breaker-mounting-kit		A	1798
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	RS5785	breaker-accessory		A	1800
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	RS5786	breaker-accessory		A	1801
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	SMND	branch-connector-kit	P5, SB, CDP6	A	1591
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	SSMND	branch-connector-kit	P5, SB, CDP6	A	1597
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA2K500	lug		A	1784
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA2K8750	lug-kit		A	1793
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA2N750	lug		A	1796
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA2N8750	lug-kit		A	1793
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA3K350	lug-kit		A	1794
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA3K500	lug		A	1785
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA3N8750	lug-kit		A	1794
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA3P8750	lug-kit		A	1794
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA4H500	lug-kit		A	1794
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA4N8500	lug-kit		A	1795
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA4P8500	lug-kit		A	1795
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TC2K500	lug		A	1785
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TC3K350	lug-kit		A	1795
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TCM2	breaker-mounting-kit		A	1799
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TCM3	breaker-mounting-kit		A	1799
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	2TA3N8750	lug-kit		A	1788

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	2TA4N8500	lug-kit		A	1789
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	2TA4P8500	lug-kit		A	1789
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	3TA3N8750	lug-kit		A	1790
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	3TA4N8500	lug-kit		A	1790
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	3TA4P8500	lug-kit		A	1790
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	CCN1200	lug-kit		A	1801
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	CCN1200K2	lug-kit		A	1802
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	CCN1200K3	lug-kit		A	1802
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	CS3637R	connector-strap	P5	A	1598
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	CS3638R	connector-strap	P5	A	1598
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	CS3639R	connector-strap	P5	A	1599
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	EX11	breaker-accessory	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1694
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	LK13500	lug-kit		A	1792
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	LK13750	lug-kit		A	1792
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	LK14500	lug-kit		A	1792
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	LK33500	lug-kit		A	1792
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	LK33750	lug-kit		A	1793
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	LK34500	lug-kit		A	1793
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	MDTERMSHIELD	barrier		A	1799
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	MN6BL	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1698
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	MN6PLD	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1702

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	NDTS	barrier		A	1800
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	PC5664	breaker-mounting-kit		A	1797
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	PC5665	breaker-mounting-kit		A	1797
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	PC5666	breaker-mounting-kit		A	1798
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	PC5667	breaker-mounting-kit		A	1798
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	PM5666	breaker-mounting-kit		A	1798
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	RS5785	breaker-accessory		A	1800
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	RS5786	breaker-accessory		A	1801
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	SMND	branch-connector-kit	P5, SB, CDP6	A	1591
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	SSMND	branch-connector-kit	P5, SB, CDP6	A	1597
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TA2K500	lug		A	1784
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TA2K8750	lug-kit		A	1793
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TA2N750	lug		A	1796
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TA2N8750	lug-kit		A	1793
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TA3K350	lug-kit		A	1794
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TA3K500	lug		A	1785
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TA3N8750	lug-kit		A	1794
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TA3P8750	lug-kit		A	1794
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TA4H500	lug-kit		A	1794
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TA4N8500	lug-kit		A	1795
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TA4P8500	lug-kit		A	1795

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TC2K500	lug		A	1785
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TC3K350	lug-kit		A	1795
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TCN2	breaker-mounting-kit		A	1803
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	TCN3	breaker-mounting-kit		A	1803
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	EX11	breaker-accessory	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1694
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	MB9301	breaker-mounting-kit		A	1805
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	MDTERMSHIELD	barrier		A	1799
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	MM9301	breaker-mounting-kit		A	1805
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	MN6BL	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1698
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	MN6PLD	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1702
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	PRDBS1	terminal-shield		A	1806
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TA4P750	lug		A	1817
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TA5P600	lug		A	1804
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TA6R600	lug		A	1804
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TC5R600	lug		A	1805
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	EX11	breaker-accessory	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1694
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	MBR9302	breaker-mounting-kit		A	1806
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	MDTERMSHIELD	barrier		A	1799
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	MM9302	breaker-mounting-kit		A	1806
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	MN6BL	handle-lock	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1698
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	MN6PLD	padlock-attachment	RP1, P1, P2, P3, S1/S2, P4, P5, P3	A	1702
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	TA6R600	lug		A	1804
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	TC5R600	lug		A	1805
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	12CLN500	lug-kit		A	1808

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	2TA3NG750	lug-kit		A	1808
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	2TA4NG500	lug-kit		A	1808
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TA12JG04	lug-kit		A	1808
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TA1CG30	lug-kit		A	1808
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TA1DG30	lug-kit		A	1809
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TA3DG02	lug-kit		A	1809
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TA3FG20	lug-kit		A	1809
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TA3NG750	lug-kit		A	1809
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TA4NG500	lug-kit		A	1809
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TA4NG500H	lug-kit		A	1810
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TA6DG04	lug-kit		A	1810
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TA6FG04	lug-kit		A	1810
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TA6JG20	lug-kit		A	1810
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TA6PG750	lug-kit		A	1810
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TAW1FG350	lug-kit		A	1811
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TC1DG30	lug-kit		A	1811
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TC4NG500	lug-kit		A	1811
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TCW1FG350	lug-kit		A	1811
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TW1CG20	lug-kit		A	1811
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TW1DG20	lug-kit		A	1812
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TW1FG350	lug-kit		A	1812
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3TW1JG600	lug-kit		A	1812
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3VL9300-8CE01	barrier		A	1825
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3VL9600-8CE01	barrier		A	1825
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	3VL9800-8CE01	barrier		A	1825
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	4TA1DG30	lug-kit		A	1812
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	4TA3NG750	lug-kit		A	1812
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	4TA4NG500	lug-kit		A	1813
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	4TAW1FG350	lug-kit		A	1813
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	4TW1DG20	lug-kit		A	1813

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	4TW1FG350	lug-kit		A	1813
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	4TW1JG600	lug-kit		A	1813
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	FBCD3	connector-strap		A	1823
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	FBCD4	connector-strap		A	1823
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	FBCF3	connector-strap		A	1823
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	FBCF4	connector-strap		A	1823
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	FBCJ3	connector-strap		A	1824
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	FBCJ4	connector-strap		A	1824
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	FBCL3	connector-strap		A	1824
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	IPBF4	barrier		A	1825
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	IPBM4	barrier		A	1825
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	IPBP4	barrier		A	1826
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	LMAP1600	connector-strap		A	1824
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MBPG1600	breaker-mounting-kit		A	1818
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MBPG1601	breaker-mounting-kit		A	1818
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MG1	branch-connector-kit	P4, P5, SB	A	1525
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MG1D	branch-connector-kit	P4, P5, SB, CDP6	A	1525
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MSKM4	fastener		A	1826
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	NG1D	branch-connector-kit	P5, SB, CDP6	A	1576
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBDFC3	breaker-mounting-kit		A	1818
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBDFC4	breaker-mounting-kit		A	1818
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBDRC3	breaker-mounting-kit		A	1818
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBDRC4	breaker-mounting-kit		A	1819
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBFFC3	breaker-mounting-kit		A	1819
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBFFC4	breaker-mounting-kit		A	1819
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBFRC3	breaker-mounting-kit		A	1819
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBFRC4	breaker-mounting-kit		A	1819
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBJRC3	breaker-mounting-kit		A	1820
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBJRC4	breaker-mounting-kit		A	1820
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBLFC4	breaker-mounting-kit		A	1820

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBMRC3	breaker-mounting-kit		A	1820
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCBNRC3	breaker-mounting-kit		A	1820
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCXD3	breaker-mounting-kit		A	1821
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCXD4	breaker-mounting-kit		A	1821
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCXFT	breaker-mounting-kit		A	1821
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCXLT	breaker-mounting-kit		A	1821
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCXM3	breaker-mounting-kit		A	1821
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCXMH	breaker-mounting-kit		A	1822
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCXMT	breaker-mounting-kit		A	1822
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCXN3	breaker-mounting-kit		A	1822
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	PCXPT	breaker-mounting-kit		A	1822
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLDLF	rear-stud		A	1830
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLDLR	rear-stud		A	1830
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLDSF	rear-stud		A	1830
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLDSR	rear-stud		A	1830
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLFLF	rear-stud		A	1831
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLFLR	rear-stud		A	1831
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLFSF	rear-stud		A	1831
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLFSR	rear-stud		A	1831
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLJLF	rear-stud		A	1831
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLJSF	rear-stud		A	1832
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLJSR	rear-stud		A	1832
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLLSF	rear-stud		A	1832
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	RTLNSF	rear-stud		A	1832
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SDGD	branch-connector-kit	P4, P5, SB, CDP6	A	1538
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SFG	branch-connector-kit	P4, P5, SB	A	1541
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SFGD	branch-connector-kit	P4, P5, SB, CDP6	A	1542
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG	branch-connector-kit	P4, P5, SB	A	1545
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG1D	branch-connector-kit	P4, P5, SB, CDP6	A	1545
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG2D	branch-connector-kit	P5, SB, CDP6	A	1589

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SLG	branch-connector-kit	P4, P5, SB	A	1547
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SLGD	branch-connector-kit	P4, P5, SB, CDP6	A	1548
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTDF3	rear-stud		A	1832
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTDF4	rear-stud		A	1833
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTDR3	rear-stud		A	1833
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTDR4	rear-stud		A	1833
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTFF3	rear-stud		A	1833
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTFF4	rear-stud		A	1833
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTFR3	rear-stud		A	1834
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTFR4	rear-stud		A	1834
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTJF4	rear-stud		A	1834
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTJR3	rear-stud		A	1834
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTJR4	rear-stud		A	1834
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTLF3	rear-stud		A	1835
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTLF4	rear-stud		A	1835
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTMF3	rear-stud		A	1835
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTMF4	rear-stud		A	1835
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTNF3	rear-stud		A	1835
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SRTNF4	rear-stud		A	1836
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TA12JG04	lug-kit		A	1814
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TA1DG30	lug-kit		A	1814
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TA3DG02	lug-kit		A	1814
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TA3FG20	lug-kit		A	1814
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TA4P750	lug		A	1817
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TA6DG04	lug-kit		A	1814
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TA6FG04	lug-kit		A	1815
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TA6JG20	lug-kit		A	1815
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TA6PG750	lug-kit		A	1815
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TAW1FG350	lug-kit		A	1815
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TC1DG30	lug-kit		A	1815

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TCW1FG350	lug-kit		A	1816
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TSLF3	terminal-shield		A	1826
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TSLF4	terminal-shield		A	1827
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TSLL3	terminal-shield		A	1827
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TSLL4	terminal-shield		A	1827
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TSLM3	terminal-shield		A	1827
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TSLM3M	terminal-shield		A	1828
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TSLM4	terminal-shield		A	1828
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TSLM4M	terminal-shield		A	1828
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TSSL3	terminal-shield		A	1828
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TSSL4	terminal-shield		A	1829
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TSSM3	terminal-shield		A	1829
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TSSM4	terminal-shield		A	1829
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TW1DG20	lug-kit		A	1816
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TW1FG350	lug-kit		A	1816
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	TW1JG600	lug-kit		A	1816
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4176B68	deadfront	PRL3A	—	363
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4178B08	deadfront	PRL3A	—	365
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4179B39	deadfront	PRL3A	—	365
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4179B40	deadfront	PRL3A	—	365
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4179B41	deadfront	PRL3A	—	365
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4179B42	deadfront	PRL3A	—	366
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4180B61	deadfront	PRL1A, PRL2A	—	247
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4180B93	deadfront	PRL3A	—	366
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8073	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	248
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8076	deadfront	PRL3A, PRL3X	—	367

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8077	deadfront	PRL3A, PRL3X	—	367
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8081	deadfront	PRL3A, PRL3X	—	368
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8082	deadfront	PRL3A, PRL3X	—	369
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	EEEHD220015SB2	breaker-mounting-kit	EE, EP, ES	A	114
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB21AFB	main-breaker-kit	PRL1A, PRL2A	A	184
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB21AFT	main-breaker-kit	PRL1A, PRL2A	A	185
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB21SFB	main-breaker-kit	PRL1A, PRL2A	A	185
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB21SFT	main-breaker-kit	PRL1A, PRL2A	A	186
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB23AFB	main-breaker-kit	PRL1A, PRL2A	A	186
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB23AFT	main-breaker-kit	PRL1A, PRL2A	A	187
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB23SFB	main-breaker-kit	PRL1A, PRL2A	A	187
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB23SFT	main-breaker-kit	PRL1A, PRL2A	A	188
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	85
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KMP40KD3400	conversion-kit	MP40, CDP, NFB, MP2	A	146
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL3AED2	branch-connector-kit	PRL3A	A	332
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL3AED3	branch-connector-kit	PRL3A, PRL3X	A	332
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL3ED	branch-connector-kit	PRL3, WEB	A	321
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL4ED	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	437
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL4ED2	breaker-mounting-kit	PRL4, PRL4X	A	438
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	460
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	461

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	MP40ED225-3	branch-connector-kit	MP40, MP2	C	140
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C72G01	connector-strap		A	533
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C72G03	connector-strap		A	533
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C73G01	connector-strap		A	533
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C73G03	connector-strap		A	534
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C73G05	connector-strap		A	534
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C73G06	connector-strap		A	535
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	374D883G01	breaker-accessory		A	546
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	374D883G02	breaker-accessory		A	546
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3T100FB	lug-kit		A	524
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3T150FB	lug-kit		A	525
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3T20FB	lug-kit		A	526
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3T225FD	lug-kit		C	526
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA100FD	lug-kit		A	527
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA150F3K	lug-kit		A	528
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA150F6K	lug-kit		A	528
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA150FB	lug-kit		—	530
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA225FD	lug-kit		A	530
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA225FDK	lug-kit		A	531
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA50FB	lug-kit		A	532
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	4210B95G01	barrier		A	540

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	4210B95G02	barrier		A	540
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	451D874G01	breaker-accessory		A	547
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	451D874G02	breaker-accessory		A	548
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	624B600H01	mounting-bracket		A	538
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	624B600H02	mounting-bracket		A	539
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	625B229G06	barrier		A	540
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	625B229G07	barrier		A	541
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	625B229G08	barrier		A	541
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	625B229G09	barrier		A	541
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	673B142G02	connector-strap		A	535
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	673B142G03	connector-strap		A	536
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	673B142G04	connector-strap		A	536
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	673B142G10	connector-strap		A	536
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	FCWTK	breaker-accessory		A	548
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	FCWTK225	breaker-accessory		A	550
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	IPB1	barrier		A	542
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEK1	breaker-accessory		A	551
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEK12	breaker-accessory		A	551
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEK14	breaker-accessory		A	552
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEKM1	breaker-accessory		A	552
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEKM12	breaker-accessory		A	553

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEKM14	breaker-accessory		A	554
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPR1A	fastener		A	544
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPR1AM	fastener		A	545
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	TEC1	barrier		A	542
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	TEC2	barrier		A	543
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4176B68	deadfront	PRL3A	—	363
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4178B06H01	filler-plate	PRL3A	—	370
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4178B08	deadfront	PRL3A	—	365
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4179B39	deadfront	PRL3A	—	365
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4179B40	deadfront	PRL3A	—	365
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4179B41	deadfront	PRL3A	—	365
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4179B42	deadfront	PRL3A	—	366
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4180B03	deadfront	PRL1A, PRL2A	—	246
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4180B52H01	filler-plate	PRL1A, PRL2A	—	249
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4180B61	deadfront	PRL1A, PRL2A	—	247
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4180B93	deadfront	PRL3A	—	366
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4218B80G01	fastener		—	555
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8072	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	248
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8073	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	248
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8076	deadfront	PRL3A, PRL3X	—	367
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8077	deadfront	PRL3A, PRL3X	—	367

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8078	deadfront	PRL3A, PRL3X	—	367
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8079	deadfront	PRL3A, PRL3X	—	368
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8080	deadfront	PRL3A, PRL3X	—	368
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8081	deadfront	PRL3A, PRL3X	—	368
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8082	deadfront	PRL3A, PRL3X	—	369
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8083H01	filler-plate	PRL3A, PRL3X	—	370
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	47-28007	filler-plate	PH	—	163
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	47-28008	filler-plate	PH	—	164
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	47-28266	filler-plate	PH	—	164
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	624B375G01	fastener		—	555
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	624B375G02	fastener		—	555
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	99-3613	deadfront	PH	—	160
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	99-3613-10	deadfront	PH	—	160
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	99-3613-14	deadfront	PH	—	161
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	99-3613-15	deadfront	PH	—	161
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	99-3613-18	deadfront	PH	—	161
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	99-3613-2	deadfront	PH	—	161
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	99-3613-21	deadfront	PH	—	162
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	99-3613-24	deadfront	PH	—	162
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	99-3613-31	deadfront	PH	—	162
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	99-3613-6	deadfront	PH	—	162

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	99-3613-7	deadfront	PH	—	163
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	A1X1LTK	breaker-accessory	PRL3A, PRL3X, PRL4	A	373
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	A1X1PK	breaker-accessory	PRL3A, PRL3X, PRL4	A	374
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	A1X1RPKFDE	breaker-accessory	PRL3A, PRL3X, PRL4	A	374
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	A1X1RTK	breaker-accessory	PRL3A, PRL3X, PRL4	A	374
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	A2X1LPK	breaker-accessory	PRL3A, PRL3X, PRL4	A	374
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	A2X1RPK	breaker-accessory	PRL3A, PRL3X, PRL4	A	375
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	BMH1	fastener		—	556
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	E1X1PK	breaker-accessory	PRL3A, PRL3X, PRL4	A	375
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	EEEHD220015SB2	breaker-mounting-kit	EE, EP, ES	A	114
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB11AFB	main-breaker-kit	PRL1A, PRL2A	A	180
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB11AFT	main-breaker-kit	PRL1A, PRL2A	A	181
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB11SFB	main-breaker-kit	PRL1A, PRL2A	A	181
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB11SFT	main-breaker-kit	PRL1A, PRL2A	A	182
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB13AFB	main-breaker-kit	PRL1A, PRL2A	A	182
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB13AFT	main-breaker-kit	PRL1A, PRL2A	A	183
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB13SFB	main-breaker-kit	PRL1A, PRL2A	A	183
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB13SFT	main-breaker-kit	PRL1A, PRL2A	A	184
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB21AFB	main-breaker-kit	PRL1A, PRL2A	A	184
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB21AFT	main-breaker-kit	PRL1A, PRL2A	A	185
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB21SFB	main-breaker-kit	PRL1A, PRL2A	A	185

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB21SFT	main-breaker-kit	PRL1A, PRL2A	A	186
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB23AFB	main-breaker-kit	PRL1A, PRL2A	A	186
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB23AFT	main-breaker-kit	PRL1A, PRL2A	A	187
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB23SFB	main-breaker-kit	PRL1A, PRL2A	A	187
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB23SFT	main-breaker-kit	PRL1A, PRL2A	A	188
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	85
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPEHD	conversion-kit	CDP	A	97
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	85
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPFD	conversion-kit	CDP	A	98
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPFDB	conversion-kit	CDP	A	99
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KMP40KD3400	conversion-kit	MP40, CDP, NFB, MP2	A	146
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPHFDB3100T	conversion-kit	PH	A	164
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPH-LFDB3100T	conversion-kit	PH, NFB	A	165
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AED2	branch-connector-kit	PRL3A	A	332
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AED3	branch-connector-kit	PRL3A, PRL3X	A	332
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AFD1	branch-connector-kit	PRL3A	A	333
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AFD2	branch-connector-kit	PRL3A, PRL3X	A	333
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AFD3	branch-connector-kit	PRL3A, PRL3X	A	333
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	A	322
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	439
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FD	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	441

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FD1	breaker-mounting-kit	PRL4, PRL4X	A	442
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FD2	breaker-mounting-kit	PRL4, PRL4X	A	443
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FDCL	breaker-mounting-kit	PRL4, PRL4X	A	444
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4X12	breaker-mounting-kit	PRL4, PRL4X	A	459
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	460
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	461
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	LKD1	handle-lock	PRL3A, PRL3X, PRL4	A	380
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	MP40KF100-2	branch-connector-kit	MP40, MP2, CDP, NFB	A	142
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	MP40KF100-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	76
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	MP40KF100-3H	hardware-kit	MP40, MP2	—	146
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	MP40KF225-2	branch-connector-kit	MP40, MP2, CDP, NFB	A	142
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	MP40KF225-3	branch-connector-kit	MP40, MP2, CDP, NFB	A	143
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	PH6E-3	branch-connector-kit	PH	A	158
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	PHL1	padlock-attachment	PRL3A, PRL3X, PRL4	A	387
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	PLK1	padlock-attachment	PRL3A, PRL3X, PRL4	A	387
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	PLK1LOFF	padlock-attachment	PRL3A, PRL3X, PRL4	A	388
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	PLK1ROFF	padlock-attachment	PRL3A, PRL3X, PRL4	A	388
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	PRLSEBFD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	A	243
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	SNT1LP03K	breaker-accessory	PRL3A, PRL3X, PRL4	A	375
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	SNT1LP08K	breaker-accessory	PRL3A, PRL3X, PRL4	A	376
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	SNT1LP12K	breaker-accessory	PRL3A, PRL3X, PRL4	A	376

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	SNT1LP18K	breaker-accessory	PRL3A, PRL3X, PRL4	A	376
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	SNT1RP03K	breaker-accessory	PRL3A, PRL3X, PRL4	A	377
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	SNT1RP08K	breaker-accessory	PRL3A, PRL3X, PRL4	A	377
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	SNT1RP12K	breaker-accessory	PRL3A, PRL3X, PRL4	A	377
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	SNT1RP18K	breaker-accessory	PRL3A, PRL3X, PRL4	A	378
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	UVH1LP08K	breaker-accessory	PRL3A, PRL3X, PRL4	A	378
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	UVH1LP11K	breaker-accessory	PRL3A, PRL3X, PRL4	A	378
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	UVH1LP15K	breaker-accessory	PRL3A, PRL3X, PRL4	A	379
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	UVH1LP21K	breaker-accessory	PRL3A, PRL3X, PRL4	A	379
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	UVH1RP08K	breaker-accessory	PRL3A, PRL3X, PRL4	A	379
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	UVH1RP11K	breaker-accessory	PRL3A, PRL3X, PRL4	A	380
Series C G-Frame (GD/GHC/GHB) (EAT)	1223C77G03	padlock-attachment	PRL1A, PRL2A, PRL1X, PRL2X	A	298
Series C G-Frame (GD/GHC/GHB) (EAT)	1223C77G05	padlock-attachment	PRL1A, PRL2A, PRL1X, PRL2X	A	298
Series C G-Frame (GD/GHC/GHB) (EAT)	1223C77G06	padlock-attachment	PRL1A, PRL2A, PRL1X, PRL2X	A	299
Series C G-Frame (GD/GHC/GHB) (EAT)	1294C01H01	handle-lock	PRL1A, PRL2A, PRL1X, PRL2X	A	297
Series C G-Frame (GD/GHC/GHB) (EAT)	3TA100G3K	lug-kit		A	556
Series C G-Frame (GD/GHC/GHB) (EAT)	3TA100G6K	lug-kit		A	557
Series C G-Frame (GD/GHC/GHB) (EAT)	5652B38G01	breaker-accessory		A	668
Series C G-Frame (GD/GHC/GHB) (EAT)	624B375G23	fastener		—	558
Series C G-Frame (GD/GHC/GHB) (EAT)	8703C80G05	fastener		—	559
Series C G-Frame (GD/GHC/GHB) (EAT)	GPHBOFF	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	384
Series C G-Frame (GD/GHC/GHB) (EAT)	GTSK3	barrier		A	558
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	1266C07G01	barrier		A	564
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	2600D26G01	connector-strap		A	563
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	2600D26G02	connector-strap		A	563
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	3TA250J3K	lug-kit		A	559

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	3TA250J6K	lug-kit		A	560
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	5010D23G01	breaker-accessory		A	569
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	5010D23G02	breaker-accessory		A	569
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	6631C01G01	barrier		A	564
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	6641C16G01	barrier		A	565
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	6641C16G02	barrier		A	565
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	IPB2	barrier		C	565
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	IPB3	barrier		A	566
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KCWTK	breaker-accessory		A	570
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KPEK2	breaker-accessory		A	571
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KPEK24	breaker-accessory		A	571
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KPEKM2	breaker-accessory		A	572
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KPEKM24	breaker-accessory		A	573
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	PLN2	fastener		A	567
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	PLN2M	fastener		A	568
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	T250KB	lug-kit		A	560
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	TA250KB	lug-kit		A	561
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	4176B60	deadfront	PRL3A	—	362
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	4176B79	deadfront	PRL3A	—	364
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	4180B04	deadfront	PRL1A, PRL2A	—	247
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	4180B52H01	filler-plate	PRL1A, PRL2A	—	249
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	BMH2	fastener		—	573
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	EEEHD220015SB2	breaker-mounting-kit	EE, EP, ES	A	114
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB41AJB	main-breaker-kit	PRL1A, PRL2A	A	188
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB41AJT	main-breaker-kit	PRL1A, PRL2A	A	189
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB41SJB	main-breaker-kit	PRL1A, PRL2A	A	190
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB41SJT	main-breaker-kit	PRL1A, PRL2A	A	191
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB43AJB	main-breaker-kit	PRL1A, PRL2A	A	192
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB43AJT	main-breaker-kit	PRL1A, PRL2A	A	193
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB43SJB	main-breaker-kit	PRL1A, PRL2A	A	194

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB43SJT	main-breaker-kit	PRL1A, PRL2A	A	195
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KCDPJD	conversion-kit	CDP	A	101
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KCDPJDB	conversion-kit	CDP	A	102
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	87
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KMP40KD3400	conversion-kit	MP40, CDP, NFB, MP2	A	146
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KPRL4JDS	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	445
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KPRL4JDT	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	446
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	LKD3	handle-lock	PRL3A, PRL3X, PRL4	A	381
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	MP40KJ225-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	77
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	PHB3	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	387
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	PLK3	padlock-attachment	PRL3A, PRL3X, PRL4	A	388
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	PLK3LOFF	padlock-attachment	PRL3A, PRL3X, PRL4	A	388
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	PLK3ROFF	padlock-attachment	PRL3A, PRL3X, PRL4	A	389
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	PRLSEBJD	barrier	PRL1A, PRL2A, PRL3A	A	244
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	208B264H01	mounting-bracket		A	596
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2T400K	lug-kit		A	575
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2T400KCW	lug-kit		A	576
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2T402K	lug-kit		A	576
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA400K	lug-kit		A	577
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA400KCW	lug-kit		A	578
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA401K	lug-kit		A	578
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA401KCW	lug-kit		A	579
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA402K	lug-kit		A	579
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3T400K	lug-kit		A	580
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3T400KCW	lug-kit		A	581
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3T402K	lug-kit		A	581
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA400K	lug-kit		A	582
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA400K3K	lug-kit		A	582
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA400K6K	lug-kit		A	583
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA400KCW	lug-kit		A	584

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA401K	lug-kit		A	584
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA401KCW	lug-kit		A	585
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA402K	lug-kit		A	586
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4212B77G01	connector-strap		A	595
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4212B78G02	connector-strap		A	596
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4T400K	lug-kit		A	587
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4T400KCW	lug-kit		A	587
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4T402K	lug-kit		A	588
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA400K	lug-kit		A	588
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA400KCW	lug-kit		A	589
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA401K	lug-kit		A	589
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA401KCW	lug-kit		A	590
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA402K	lug-kit		A	590
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G02	breaker-accessory		A	602
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G03	breaker-accessory		A	603
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G04	breaker-accessory		A	603
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G05	breaker-accessory		A	603
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G06	breaker-accessory		A	604
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G07	breaker-accessory		A	605
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	IPB2	barrier		C	565
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	IPB3	barrier		A	566
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KCWTK	breaker-accessory		A	570
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPEK3	breaker-accessory		A	605
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPEK34	breaker-accessory		A	606
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPEKM3	breaker-accessory		A	607
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPEKM34	breaker-accessory		A	608
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPR3A	fastener		A	599
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPR3AM	fastener		A	599
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPR3B	fastener		A	600
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPR3BM	fastener		A	601

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	T300K	lug-kit		A	591
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	T350K	lug-kit		A	592
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TA250KB	lug-kit		A	561
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TA300K	lug-kit		A	592
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TA350K	lug-kit		A	593
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TAD3	conversion-kit	PRL4, CDP, MP40, MP2, EP	A	488
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TS33LD	barrier		A	597
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TS33LN	barrier		A	598
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TS34LN	barrier		A	598
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	4176B61	deadfront	PRL3A	—	363
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	4180B05	deadfront	PRL1A, PRL2A	—	247
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	4180B52H01	filler-plate	PRL1A, PRL2A	—	249
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	42C7982	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	248
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	BMH3	fastener		—	608
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	EEEHD220015SB2	breaker-mounting-kit	EE, EP, ES	A	114
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB41AKB	main-breaker-kit	PRL1A, PRL2A	A	189
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB41AKT	main-breaker-kit	PRL1A, PRL2A	A	190
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB41SKB	main-breaker-kit	PRL1A, PRL2A	A	191
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB41SKT	main-breaker-kit	PRL1A, PRL2A	A	192
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB43AKB	main-breaker-kit	PRL1A, PRL2A	A	193
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB43AKT	main-breaker-kit	PRL1A, PRL2A	A	194
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB43SKB	main-breaker-kit	PRL1A, PRL2A	A	195
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB43SKT	main-breaker-kit	PRL1A, PRL2A	A	196
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPDK	conversion-kit	CDP	A	96

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPHKD	conversion-kit	CDP	A	100
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPKD	conversion-kit	CDP	A	102
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPKDB	conversion-kit	CDP	A	103
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	89
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KMP40KD3400	conversion-kit	MP40, CDP, NFB, MP2	A	146
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KPRL4CKD	breaker-mounting-kit	PRL4, PRL4X	A	435
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KPRL4KDS	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	447
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KPRL4KDT	breaker-mounting-kit	PRL4, PRL4X	A	448
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	LKD3	handle-lock	PRL3A, PRL3X, PRL4	A	381
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	MP40KK400-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	77
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	PHB3	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	387
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	PLK3	padlock-attachment	PRL3A, PRL3X, PRL4	A	388
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	PLK3LOFF	padlock-attachment	PRL3A, PRL3X, PRL4	A	388
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	PLK3ROFF	padlock-attachment	PRL3A, PRL3X, PRL4	A	389
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	PRLSEBLGKD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	A	245
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	TAD3	conversion-kit	PRL4, CDP, MP40, MP2, EP	A	488
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	208B297H01	mounting-bracket		A	622
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	2TA401LDK	lug-kit		A	609
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	2TA603LDK	lug-kit		A	610
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	2TA603LDKCW	lug-kit		A	611
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	314C420G05	barrier		A	622
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	314C960G07	breaker-accessory		A	624
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	314C960G08	breaker-accessory		A	624
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	314C960G09	breaker-accessory		A	625

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	3TA401LDK	lug-kit		A	611
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	3TA603LDK	lug-kit		A	612
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	3TA603LDKCW	lug-kit		A	613
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	4TA401LDK	lug-kit		A	614
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	4TA603LDK	lug-kit		A	614
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	4TA603LDKCW	lug-kit		A	615
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	506C052G01	connector-strap		A	620
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	624B609G01	connector-strap		A	621
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	IPB3	barrier		A	566
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	IPB4	barrier		A	623
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	KPEK4	breaker-accessory		A	626
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	KPEK44	breaker-accessory		A	627
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	KPEKM4	breaker-accessory		A	627
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	KPEKM44	breaker-accessory		A	628
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	T602LD	lug-kit		A	615
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	T602LDCW	lug-kit		A	616
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	TA450LD	lug-kit		A	617
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	TA602LD	lug-kit		A	618
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	TA602LDCW	lug-kit		A	619
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	4176B51	deadfront	PRL3A	—	362
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	BMH4	fastener		—	628
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	EEEHD220015SB2	breaker-mounting-kit	EE, EP, ES	A	114
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	HLK4	padlock-attachment	PRL3A, PRL3X, PRL4	A	384
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	HLK4LOFF	padlock-attachment	PRL3A, PRL3X, PRL4	A	385
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	HLK4S	padlock-attachment	PRL3A, PRL3X, PRL4	A	385

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	HLK4SOFF	padlock-attachment	PRL3A, PRL3X, PRL4	A	385
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	88
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KCDPLD	conversion-kit	CDP	A	104
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KMP40KD3400	conversion-kit	MP40, CDP, NFB, MP2	A	146
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KPRL4LC	breaker-mounting-kit	PRL4, PRL4X	A	450
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KPRL4LD	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	452
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	LKD4	handle-lock	PRL3A, PRL3X, PRL4	A	381
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	MP40KL400-3	branch-connector-kit	MP40, MP2	C	143
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	MP40KL600-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	78
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	208B966G01	barrier		A	639
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G01	breaker-accessory		A	640
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G04	breaker-accessory		A	640
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G05	breaker-accessory		A	640
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G06	breaker-accessory		A	641
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G07	breaker-accessory		A	624
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G08	breaker-accessory		A	624
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G09	breaker-accessory		A	625
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G10	breaker-accessory		A	641
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G11	breaker-accessory		A	641
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G12	breaker-accessory		A	642
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C996G01	connector-strap		A	635
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C996G02	connector-strap		A	636
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C996G03	connector-strap		A	637

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	315C270H01	mounting-bracket		A	638
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	IPB4	barrier		A	623
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	T600MA1	lug-kit		A	629
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	T800MA1	lug-kit		A	629
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA700MA1	lug-kit		A	630
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA700MA1CWT	lug-kit		A	631
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA800MA2	lug-kit		A	631
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA800MA2CWT	lug-kit		A	632
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA801MA	lug-kit		A	632
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA801MACWT	lug-kit		A	633
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	BMH5	fastener		—	643
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	HLK4	padlock-attachment	PRL3A, PRL3X, PRL4	A	384
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	HLK4LOFF	padlock-attachment	PRL3A, PRL3X, PRL4	A	385
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	HLK4S	padlock-attachment	PRL3A, PRL3X, PRL4	A	385
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	HLK4SOFF	padlock-attachment	PRL3A, PRL3X, PRL4	A	385
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	90
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KCDPMDL	conversion-kit	CDP	A	105
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KMP40KD3400	conversion-kit	MP40, CDP, NFB, MP2	A	146
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KPRL4MC	breaker-mounting-kit	PRL4, PRL4X	A	455
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KPRL4MD	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	456
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KPRL4X34	breaker-mounting-kit	PRL4, PRL4X	A	464
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	LKD4	handle-lock	PRL3A, PRL3X, PRL4	A	381
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	MP40KM800-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	79
Series C N-Frame (ND/HND/NDC/NB) (EAT)	315C270H01	mounting-bracket		A	638
Series C N-Frame (ND/HND/NDC/NB) (EAT)	373B375G03	breaker-accessory		A	653

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C N-Frame (ND/HND/NDC/NB) (EAT)	373B375G04	breaker-accessory		A	653
Series C N-Frame (ND/HND/NDC/NB) (EAT)	505C606G04	connector-strap		A	649
Series C N-Frame (ND/HND/NDC/NB) (EAT)	505C606G05	connector-strap		A	650
Series C N-Frame (ND/HND/NDC/NB) (EAT)	505C606G06	connector-strap		A	651
Series C N-Frame (ND/HND/NDC/NB) (EAT)	623B222G01	breaker-accessory		A	654
Series C N-Frame (ND/HND/NDC/NB) (EAT)	623B222G02	breaker-accessory		A	655
Series C N-Frame (ND/HND/NDC/NB) (EAT)	623B222G03	breaker-accessory		A	655
Series C N-Frame (ND/HND/NDC/NB) (EAT)	IPB5	barrier		A	651
Series C N-Frame (ND/HND/NDC/NB) (EAT)	NTS3K	barrier		A	652
Series C N-Frame (ND/HND/NDC/NB) (EAT)	T1000NB1	lug-kit		A	643
Series C N-Frame (ND/HND/NDC/NB) (EAT)	T1200NB3	lug-kit		A	644
Series C N-Frame (ND/HND/NDC/NB) (EAT)	T700NB1	lug-kit		A	645
Series C N-Frame (ND/HND/NDC/NB) (EAT)	TA1000NB1	lug-kit		A	645
Series C N-Frame (ND/HND/NDC/NB) (EAT)	TA1200NB1	lug-kit		A	646
Series C N-Frame (ND/HND/NDC/NB) (EAT)	TA1201NB1	lug-kit		A	647
Series C N-Frame (ND/HND/NDC/NB) (EAT)	TA700NB1	lug-kit		A	648
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	BMH5	fastener		—	643
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	92
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KCDPND	conversion-kit	CDP	A	106
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KMP40KD3400	conversion-kit	MP40, CDP, NFB, MP2	A	146
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KPRL4CND	breaker-mounting-kit	PRL4, PRL4X	A	436
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KPRL4NC	breaker-mounting-kit	PRL4, PRL4X	A	457

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KPRL4ND	breaker-mounting-kit	PRL4, PRL4X, CHA-PM4	A	458
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KPRL4X35	breaker-mounting-kit	PRL4, PRL4X	A	465
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	LKD4	handle-lock	PRL3A, PRL3X, PRL4	A	381
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	MP40KN1200-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	80
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	PLK5	padlock-attachment	PRL3A, PRL3X, PRL4	A	389
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	PLK5S	padlock-attachment	PRL3A, PRL3X, PRL4	A	389
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	PLK5SOFF	padlock-attachment	PRL3A, PRL3X, PRL4	A	390
Series C R-Frame (RD/RDC) (EAT)	B2016RD	breaker-accessory		A	658
Series C R-Frame (RD/RDC) (EAT)	B2016RDL	breaker-accessory		A	658
Series C R-Frame (RD/RDC) (EAT)	B2500RD	breaker-accessory		A	659
Series C R-Frame (RD/RDC) (EAT)	HLK6	padlock-attachment	PRL3A, PRL3X, PRL4	A	385
Series C R-Frame (RD/RDC) (EAT)	HLK6OFF	padlock-attachment	PRL3A, PRL3X, PRL4	A	386
Series C R-Frame (RD/RDC) (EAT)	T1600RD	lug-kit		A	655
Series C R-Frame (RD/RDC) (EAT)	TA1600RD	lug-kit		A	656
Series C R-Frame (RD/RDC) (EAT)	TA2000RD	lug-kit		A	657
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3T125EF	lug-kit		A	660
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA125E3K	lug-kit		A	660
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA125E6K	lug-kit		A	661
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA125EF	lug-kit		A	661

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA150EF	lug-kit		A	662
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA160EFK	lug-kit		A	663
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	4TA160EFK	lug-kit		A	664
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	5652B38G01	breaker-accessory		A	668
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EEC3K	barrier		A	665
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EEC4K	barrier		A	665
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF2RTDK	breaker-accessory		A	668
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF2RTWK	breaker-accessory		A	669
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF3RTDK	breaker-accessory		A	669
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF3RTWK	breaker-accessory		A	670
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF4RTDK	breaker-accessory		A	671
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF4RTWK	breaker-accessory		A	672
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EFHB	handle-lock	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	380
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EFPHB	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	382
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EFPHBOFF	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	383
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EFPHL	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	383
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EFPHLOFF	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	383
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EFTS3K	barrier		A	666
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EFTS4K	barrier		A	666
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EIPBK	barrier		A	667
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	3TA225FD	lug-kit		A	530
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	3TA250FJ3	lug-kit		A	672

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	3TA250FJ6	lug-kit		A	673
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJ3RTDK	breaker-accessory		A	680
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJ3RTWK	breaker-accessory		A	681
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJ4RTDK	breaker-accessory		A	681
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJ4RTWK	breaker-accessory		A	682
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJCWTK	breaker-accessory		A	683
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJIPBK	barrier		A	676
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJIPBK4	barrier		A	677
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJPHBOFF	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	383
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJPHL	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	384
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJPHLOFF	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	384
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJTS3K	barrier		A	678
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJTS4K	barrier		A	679
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	T250FJ	lug-kit		A	674
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	TA250FJ	lug-kit		A	674
Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH (EAT)	KPRL4LG	breaker-mounting-kit	PRL4, PRL4X	A	454
Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH (EAT)	KPRL4X336	breaker-mounting-kit	PRL4, PRL4X	A	463
Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH (EAT)	PRLSEBLGKD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	A	245
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3T631LK	lug-kit		A	684
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3T632LK	lug-kit		A	685
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3T632LKW	lug-kit		A	686
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3TA631LK	lug-kit		A	686
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3TA632LK	lug-kit		A	687
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3TA632LKW	lug-kit		A	688
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4T631LK	lug-kit		A	689
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4T632LK	lug-kit		A	689
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4T632LKW	lug-kit		A	689
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4TA631LK	lug-kit		A	690
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4TA632LK	lug-kit		A	690

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4TA632LKW	lug-kit		A	691
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	IPB3	barrier		A	566
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	L3RTWK	breaker-accessory		A	695
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	L4RTWK	breaker-accessory		A	696
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LBHPOFF	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	386
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LGTES3	breaker-accessory		A	697
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LGTES4	breaker-accessory		A	698
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LGTEW3	breaker-accessory		A	699
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LGTEW4	breaker-accessory		A	700
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LPHL	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	386
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LPHLOFF	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	386
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LTS3K	barrier		A	693
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LTS4K	barrier		A	694
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	T350LK	lug-kit		A	691
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	TA350LK	lug-kit		A	692
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	TA632L	lug-kit		A	692
Series G NG-Frame (EAT)	IPB5	barrier		A	651
Series G NG-Frame (EAT)	PLK5	padlock-attachment	PRL3A, PRL3X, PRL4	A	389
Series G NG-Frame (EAT)	PLK55OFF	padlock-attachment	PRL3A, PRL3X, PRL4, PRL1A, PRL2A, PRL1X, PRL2X	A	389
Series G NG-Frame (EAT)	T1200NB3M	lug-kit		A	700
Spectra RMS SE150 (GEA)	SBD1	handle-lock	SPECTRA-PP	A	1355
Spectra RMS SE150 (GEA)	SE3LCK	breaker-accessory		A	1438
Spectra RMS SE150 (GEA)	SE3LCKL	breaker-accessory		A	1438
Spectra RMS SE150 (GEA)	SEFPLD2	padlock-attachment	SPECTRA-PP, A-SERIES-PWR	A	1357
Spectra RMS SE150 (GEA)	SEPLD	padlock-attachment	SPECTRA-PP, A-SERIES-PWR	A	1357
Spectra RMS SE150 (GEA)	TC018	lug		A	1437
Spectra RMS SE150 (GEA)	TCAL18	lug		A	1437
Spectra RMS SE150 (GEA)	TCAL18LV	lug		A	1437
Spectra RMS SE150 (GEA)	TCAL19PD1	lug		A	1438
Spectra RMS SE150 (GEA)	TCAL19PD3	lug-kit		A	1436
Spectra RMS SE150 (GEA)	TCALK318	lug-kit		A	1436
Spectra RMS SE150 (GEA)	TEF1	breaker-accessory		A	1380
Spectra RMS SE150 (GEA)	TEF2	breaker-accessory		A	1380
Spectra RMS SE150 (GEA)	TEF3	breaker-accessory		A	1380
Spectra RMS SE150 (GEA)	TEF4	breaker-accessory		A	1381
Spectra RMS SF250 (GEA)	SBD1	handle-lock	SPECTRA-PP	A	1355
Spectra RMS SF250 (GEA)	SEFPLD2	padlock-attachment	SPECTRA-PP, A-SERIES-PWR	A	1357
Spectra RMS SF250 (GEA)	SEPLD	padlock-attachment	SPECTRA-PP, A-SERIES-PWR	A	1357
Spectra RMS SF250 (GEA)	SF3LCK	breaker-accessory		A	1441
Spectra RMS SF250 (GEA)	TCAL28PD1	lug		A	1440

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra RMS SF250 (GEA)	TCAL28PD3	lug-kit		A	1439
Spectra RMS SF250 (GEA)	TCAL29	lug		A	1440
Spectra RMS SF250 (GEA)	TCAL29LV	lug		A	1440
Spectra RMS SF250 (GEA)	TCALK329	lug-kit		A	1439
Spectra RMS SF250 (GEA)	TCO29	lug		A	1441
Spectra RMS SF250 (GEA)	TFK1	breaker-accessory		A	1386
Spectra RMS SF250 (GEA)	TFK2	breaker-accessory		A	1386
Spectra RMS SG600 (GEA)	SG1BCK	breaker-accessory		A	1444
Spectra RMS SG600 (GEA)	SG1LCK	breaker-accessory		A	1445
Spectra RMS SG600 (GEA)	SGBCS1	breaker-accessory		A	1445
Spectra RMS SG600 (GEA)	SGBCS2	breaker-accessory		A	1445
Spectra RMS SG600 (GEA)	SGLVK	breaker-accessory		A	1446
Spectra RMS SG600 (GEA)	SGPLD	padlock-attachment	SPECTRA-PP	A	1357
Spectra RMS SG600 (GEA)	SGPLD2	padlock-attachment	SPECTRA-PP, A-SERIES-PWR	A	1357
Spectra RMS SG600 (GEA)	TCAL40PD1	lug		A	1444
Spectra RMS SG600 (GEA)	TCAL40PD3	lug-kit		A	1442
Spectra RMS SG600 (GEA)	TCLK265	lug-kit		A	1442
Spectra RMS SG600 (GEA)	TCLK365	lug-kit		A	1443
Spectra RMS SG600 (GEA)	TCOK265	lug-kit		A	1443
Spectra RMS SG600 (GEA)	TCOK365	lug-kit		A	1443
Spectra RMS SK1200 (GEA)	SK1LCK	breaker-accessory		A	1449
Spectra RMS SK1200 (GEA)	SKHDLEXT	breaker-accessory	SPECTRA-PP	A	1354
Spectra RMS SK1200 (GEA)	SKLVK	breaker-accessory		A	1423
Spectra RMS SK1200 (GEA)	SKPLD	padlock-attachment	SPECTRA-PP	A	1358
Spectra RMS SK1200 (GEA)	SKPLD2	padlock-attachment	SPECTRA-PP, A-SERIES-PWR	A	1358
Spectra RMS SK1200 (GEA)	SKPSHLD	barrier		A	1449
Spectra RMS SK1200 (GEA)	TC0121	lug		A	1409
Spectra RMS SK1200 (GEA)	TC081A	lug		A	1411
Spectra RMS SK1200 (GEA)	TCAL124	lug		A	1447
Spectra RMS SK1200 (GEA)	TCAL125	lug		A	1448
Spectra RMS SK1200 (GEA)	TCAL81	lug		A	1414
Spectra RMS SK1200 (GEA)	TCALK2124	lug-kit		A	1446
Spectra RMS SK1200 (GEA)	TCALK2125	lug-kit		A	1446
Spectra RMS SK1200 (GEA)	TCALK281	lug-kit		A	1406
Spectra RMS SK1200 (GEA)	TCALK3124	lug-kit		A	1447
Spectra RMS SK1200 (GEA)	TCALK3125	lug-kit		A	1447
Spectra RMS SK1200 (GEA)	TCALK381	lug-kit		A	1408
Spectra RMS SK1200 (GEA)	TCO124	lug		A	1448
Spectra RMS SK1200 (GEA)	TCO125	lug		A	1448
Spectra RMS SK1200 (GEA)	TKM11	breaker-accessory		A	1423
Spectra RMS SK1200 (GEA)	TKM12	breaker-accessory		A	1423
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5500P82	mounting-bracket	A-SERIES-PWR	—	1106
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	1109
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	1102
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	1102

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	1103
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	208C4262G32	filler-plate	SPECTRA-PP	A	1306
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	208C4262G33	filler-plate	SPECTRA-PP	A	1306
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	208C4262G34	filler-plate	SPECTRA-PP	A	1307
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	208C4262G35	filler-plate	SPECTRA-PP	A	1307
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	208C4262G36	filler-plate	SPECTRA-PP	A	1308
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	ACTFPKSE	filler-plate	SCP-PLUS	A	1171
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	ACTHKSE	hardware-kit	SCP-PLUS	A	1183
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	ACTMKSE	branch-connector-kit	SCP-PLUS	A	1167
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AFP3SED	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1319
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AFP4SED	filler-plate	SPECTRA-PP	A	1322
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AHKBE1	hardware-kit	SPECTRA-PP	A	1338
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC4EBFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1261
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC4EBSFP	breaker-mounting-kit	SPECTRA-PP	A	1262
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC4SEFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1269
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC6EBFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1270
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC6EBSFP	breaker-mounting-kit	SPECTRA-PP	A	1271
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB4EB	branch-connector-kit	SPECTRA-PP	A	1228
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB4EBFP	branch-connector-kit	SPECTRA-PP	A	1229
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB4SE	branch-connector-kit	SPECTRA-PP	A	1236
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB4SEFP	branch-connector-kit	SPECTRA-PP	A	1237

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB6EB	branch-connector-kit	SPECTRA-PP	A	1238
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB6EBFP	branch-connector-kit	SPECTRA-PP	A	1238
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	ASPP6SE6D	branch-connector-kit	A-SERIES-PWR	A	1100
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	MB133WB	main-breaker-kit	A-SERIES	A	1055
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	NHB150PK	branch-connector-kit	NHB	C	1151
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	SEMSK1	hardware-kit		A	1451
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	SEMSK2	hardware-kit		A	1452
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	SEMSK3	hardware-kit		A	1452
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	SEMSK4	hardware-kit		A	1452
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	TE13PC1	breaker-mounting-kit		A	1450
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	TE13PD1	breaker-mounting-kit		A	1450
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	TE13PD2	breaker-mounting-kit		A	1451
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	TEDFP1	filler-plate	A-SERIES	—	1070
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	TMP1	mounting-bracket		A	1378
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5500P84	mounting-bracket	A-SERIES-PWR	—	1106
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5503P90	filler-plate	A-SERIES-PWR	—	1109
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702ASFG1	connector-strap	A-SERIES-PWR	—	1102
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702BSFG1	connector-strap	A-SERIES-PWR	—	1103
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702CSFG1	connector-strap	A-SERIES-PWR	—	1103
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G53	filler-plate	SPECTRA-PP	A	1309
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G54	filler-plate	SPECTRA-PP	A	1309
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G55	filler-plate	SPECTRA-PP	A	1310
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G56	filler-plate	SPECTRA-PP	A	1310
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G57	filler-plate	SPECTRA-PP	A	1311

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G58	filler-plate	SPECTRA-PP	A	1311
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G59	filler-plate	SPECTRA-PP	A	1312
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G60	filler-plate	SPECTRA-PP	A	1313
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G61	filler-plate	SPECTRA-PP	A	1313
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G62	filler-plate	SPECTRA-PP	A	1314
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ACTFPKSF	filler-plate	SCP-PLUS	A	1171
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ACTHKSF	hardware-kit	SCP-PLUS	A	1183
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ACTMKSF	branch-connector-kit	SCP-PLUS	A	1168
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP3SFD	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1320
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP3SFS	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1320
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP4SFD	filler-plate	SPECTRA-PP	A	1322
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP4SFS	filler-plate	SPECTRA-PP	A	1322
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AHKBF1	hardware-kit	SPECTRA-PP	A	1338
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AHKF1	hardware-kit	SPECTRA-PP	A	1340
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC2FJFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1250
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC2FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	1251
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC2FLSFP	breaker-mounting-kit	SPECTRA-PP	A	1252
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC3FJFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1256
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC3FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	1257
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC3FLSFP	breaker-mounting-kit	SPECTRA-PP	A	1258
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC4FJFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1264
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC4FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	1265
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC4FLSFP	breaker-mounting-kit	SPECTRA-PP	A	1266
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC6FJFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1275
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC6FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	1276
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC6FLSFP	breaker-mounting-kit	SPECTRA-PP	A	1277
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB2FJ	branch-connector-kit	SPECTRA-PP	A	1218
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB2FJFP	branch-connector-kit	SPECTRA-PP	A	1219
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB2FJFPTF	branch-connector-kit	SPECTRA-PP	A	1219
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB3FJ	branch-connector-kit	SPECTRA-PP	A	1223

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB3FJFP	branch-connector-kit	SPECTRA-PP	A	1223
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB3FJFPTF	branch-connector-kit	SPECTRA-PP	A	1224
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB4FJ	branch-connector-kit	SPECTRA-PP	A	1232
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB4FJFP	branch-connector-kit	SPECTRA-PP	A	1233
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB4FJFPTF	branch-connector-kit	SPECTRA-PP	A	1233
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB6FJ	branch-connector-kit	SPECTRA-PP	A	1242
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB6FJFP	branch-connector-kit	SPECTRA-PP	A	1242
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB6FJFPTF	branch-connector-kit	SPECTRA-PP	A	1243
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ASP2PTFJ3P	conversion-kit	A-SERIES	—	1074
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ASPP6SF3S	branch-connector-kit	A-SERIES-PWR	A	1100
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB233	main-breaker-kit	A-SERIES	A	1056
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB2332	main-breaker-kit	A-SERIES	A	1056
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB2332WB	main-breaker-kit	A-SERIES	A	1056
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB233WB	main-breaker-kit	A-SERIES	A	1057
Spectra SF (SFHA/SFLA/SFPA) (GEA)	SF2DPK	branch-connector-kit	CCB-QMR	A	1115
Spectra SF (SFHA/SFLA/SFPA) (GEA)	SFCARE	insulator	CCB-QMR	—	1127
Spectra SF (SFHA/SFLA/SFPA) (GEA)	SFGMSK1	hardware-kit		A	1453
Spectra SF (SFHA/SFLA/SFPA) (GEA)	SFGMSK2	hardware-kit		A	1454
Spectra SF (SFHA/SFLA/SFPA) (GEA)	SFMSK1	hardware-kit		A	1454
Spectra SF (SFHA/SFLA/SFPA) (GEA)	SFMSK2	hardware-kit		A	1454
Spectra SF (SFHA/SFLA/SFPA) (GEA)	TF22PD1	breaker-mounting-kit		A	1383
Spectra SF (SFHA/SFLA/SFPA) (GEA)	TF22PD2	breaker-mounting-kit		A	1383
Spectra SF (SFHA/SFLA/SFPA) (GEA)	TF23PC1	breaker-mounting-kit		A	1453
Spectra SF (SFHA/SFLA/SFPA) (GEA)	TF23PD1	breaker-mounting-kit		A	1384
Spectra SF (SFHA/SFLA/SFPA) (GEA)	TF23PD2	breaker-mounting-kit		A	1384
Spectra SF (SFHA/SFLA/SFPA) (GEA)	TMP2	mounting-bracket		A	1385
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	10083041P1	barrier	SPECTRA-PP	—	1287
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	139C5500P83	mounting-bracket	A-SERIES-PWR	—	1106
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	139C5503P103	filler-plate	A-SERIES-PWR	—	1108

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	192A6976P189	fastener	SPECTRA-PP	—	1344
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	208C2291P1	filler-plate	SPECTRA-PP	—	1294
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	208C4262G16	filler-plate	SPECTRA-PP	**A**	1297
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	208C4262G17	filler-plate	SPECTRA-PP	**A**	1297
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	208C4262G18	filler-plate	SPECTRA-PP	**A**	1298
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	208C4262G19	filler-plate	SPECTRA-PP	**A**	1298
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	208C4262G49	filler-plate	SPECTRA-PP	**A**	1308
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3575P1	mounting-bracket	SPECTRA-PP	—	1287
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3576P1	mounting-bracket	SPECTRA-PP	—	1287
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3613P1	fastener	SPECTRA-PP	—	1344
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3618G10	connector-strap	SPECTRA-PP	—	1281
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3618G11	connector-strap	SPECTRA-PP	—	1281
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3618G13	connector-strap	SPECTRA-PP	—	1281
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3618G14	connector-strap	SPECTRA-PP	—	1281
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3618G15	connector-strap	SPECTRA-PP	—	1281
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3657P1	other	SPECTRA-PP	—	1361
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3657P2	other	SPECTRA-PP	—	1361
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P7	connector-strap	A-SERIES-PWR	—	1104
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P8	connector-strap	A-SERIES-PWR	—	1104
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P9	connector-strap	A-SERIES-PWR	—	1104
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	75A105503P101	fastener	SPECTRA-PP	—	1344

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	75A105503P105	fastener	SPECTRA-PP	—	1344
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACSFPKSG	filler-plate	SCP-PLUS	A	1169
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACSHKSG	hardware-kit	SCP-PLUS	A	1181
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACSMKSG	branch-connector-kit	SCP-PLUS	A	1164
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACTFPKSG	filler-plate	SCP-PLUS	A	1171
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACTHKSG	hardware-kit	SCP-PLUS	A	1184
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACTMKSG	branch-connector-kit	SCP-PLUS	A	1168
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AFP4SGC	filler-plate	SPECTRA-PP	A	1323
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AFP4SGD	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1323
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AFP4SGS	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1323
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AHKBG1	hardware-kit	SPECTRA-PP	A	1339
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AHKG1	hardware-kit	SPECTRA-PP	A	1341
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC2GMFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1253
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC3GMFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1258
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC4GBFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1267
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC6GBFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1277
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB2GM	branch-connector-kit	SPECTRA-PP	A	1220
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB2GMFP	branch-connector-kit	SPECTRA-PP	A	1221
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB3GM	branch-connector-kit	SPECTRA-PP	A	1224
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB3GMFP	branch-connector-kit	SPECTRA-PP	A	1225
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB4GB	branch-connector-kit	SPECTRA-PP	A	1234

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB4GBFP	branch-connector-kit	SPECTRA-PP	A	1235
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB6GB	branch-connector-kit	SPECTRA-PP	A	1243
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB6GBFP	branch-connector-kit	SPECTRA-PP	A	1244
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ASPP6SG3S	branch-connector-kit	A-SERIES-PWR	A	1101
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB332	main-breaker-kit	A-SERIES	A	1057
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB332WB	main-breaker-kit	A-SERIES	A	1057
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB333	main-breaker-kit	A-SERIES	A	1058
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB333WB	main-breaker-kit	A-SERIES	A	1058
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N22P23012B6	fastener	SPECTRA-PP	—	1345
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N22P23016B6	fastener	SPECTRA-PP	—	1345
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N245P21B6	fastener	SPECTRA-PP	—	1345
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N37P21060B6	fastener	SPECTRA-PP	—	1345
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N37P21969B6	fastener	SPECTRA-PP	—	1345
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N402P11B6	fastener	SPECTRA-PP	—	1346
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N657P21024B6	fastener	SPECTRA-PP	—	1346
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N730BP1308B6	fastener	SPECTRA-PP	—	1346
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	SFGMSK1	hardware-kit		A	1453
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	SFGMSK2	hardware-kit		A	1454
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	SFMSK1	hardware-kit		A	1454
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	SFMSK2	hardware-kit		A	1454
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	SGMSKMOM	hardware-kit		A	1457

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	SGPC1	breaker-mounting-kit		A	1455
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	SGPC2	breaker-mounting-kit		A	1455
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	SGPC7	breaker-mounting-kit		A	1456
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	SMP3	mounting-bracket		A	1456
Spectra SK (SKHA/SKLA/SKPA) (GEA)	252B1768G1	filler-plate	SPECTRA-PP	—	1314
Spectra SK (SKHA/SKLA/SKPA) (GEA)	252B1768G2	filler-plate	SPECTRA-PP	—	1315
Spectra SK (SKHA/SKLA/SKPA) (GEA)	343L564G3	hardware-kit		A	1421
Spectra SK (SKHA/SKLA/SKPA) (GEA)	455C592P1	breaker-accessory	SPECTRA-PP	—	1354
Spectra SK (SKHA/SKLA/SKPA) (GEA)	455C592P2	breaker-accessory	SPECTRA-PP	—	1354
Spectra SK (SKHA/SKLA/SKPA) (GEA)	ACSFPKSK	filler-plate	SCP-PLUS	A	1169
Spectra SK (SKHA/SKLA/SKPA) (GEA)	ACSHKSK	hardware-kit	SCP-PLUS	A	1182
Spectra SK (SKHA/SKLA/SKPA) (GEA)	ACSMKSK	branch-connector-kit	SCP-PLUS	A	1164
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AFP5LCS	filler-plate	SPECTRA-PP	A	1324
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AFP6SKS	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1325
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AHKLB1	hardware-kit	SPECTRA-PP	A	1342
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMC2KMFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1254
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMC3KMFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1260
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB2KM	branch-connector-kit	SPECTRA-PP	A	1221
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB2KMFP	branch-connector-kit	SPECTRA-PP	A	1222
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB3KM	branch-connector-kit	SPECTRA-PP	A	1226
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB3KMFP	branch-connector-kit	SPECTRA-PP	A	1226
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB3LBFP	branch-connector-kit	SPECTRA-PP	A	1227
Spectra SK (SKHA/SKLA/SKPA) (GEA)	SK12SPK	branch-connector-kit	CCB-QMR	A	1116
Spectra SK (SKHA/SKLA/SKPA) (GEA)	SK8SPK	branch-connector-kit	CCB-QMR	A	1116
Spectra SK (SKHA/SKLA/SKPA) (GEA)	SKMSK1	hardware-kit		A	1462
Spectra SK (SKHA/SKLA/SKPA) (GEA)	SKMSK2	hardware-kit		A	1463
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TK103PC1A	breaker-mounting-kit		A	1458
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TK103PC2A	breaker-mounting-kit		A	1458
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TK103PD1A	breaker-mounting-kit		A	1458

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TK103PD2A	breaker-mounting-kit		A	1459
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TK123PC1A	breaker-mounting-kit		A	1459
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TK123PC2A	breaker-mounting-kit		A	1459
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TK123PD1A	breaker-mounting-kit		A	1460
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TK123PD2A	breaker-mounting-kit		A	1460
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TK83PC1A	breaker-mounting-kit		A	1461
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TK83PC2A	breaker-mounting-kit		A	1461
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TK83PD1A	breaker-mounting-kit		A	1461
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TK83PD2A	breaker-mounting-kit		A	1462
Spectra SK (SKHA/SKLA/SKPA) (GEA)	TMP4	mounting-bracket		A	1421
Square D EH / EHB (NEHB) (SQD)	FP1	filler-plate	NEHB	C	788
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL100FA	lug-kit		A	1004
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL100FA4	lug-kit		A	1004
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL100TF	lug-kit		A	1004
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL150FA	lug-kit		A	1005
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL50FA	lug-kit		A	1005
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	CU100FA	lug-kit		A	1005
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	CU100TF	lug-kit		A	1006
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	CU30FA4	lug-kit		A	1006
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	CVC100FA	lug-kit		A	1006
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	FA3HT	handle-lock	NF, I-LINE	A	816
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	FAT	breaker-accessory		A	1008
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	FKHT	handle-lock	NF, I-LINE	A	816
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	FY3HT	handle-lock	NF, I-LINE	A	816
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	HPA-FK	padlock-attachment	NF, I-LINE, NH1B	A	817
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	HPA-FYQ	padlock-attachment	NF, I-LINE, NH1B	A	818
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	PDC3FA2	lug-kit		A	1007
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	PDC6FA6	lug-kit		A	1007
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	VC100FA	lug-kit		A	1007
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	AL250KA	lug-kit		A	1008

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	AL250KI	lug-kit		A	1008
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	AL250KIT	breaker-accessory		A	1010
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	CU250KA	lug-kit		A	1009
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	CVC250KA3	lug-kit		A	1009
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	HPA-FK	padlock-attachment	NF, I-LINE, NH1B	A	817
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	NQODJK	main-breaker-kit	NQOD	A	905
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	VC250KA3	lug-kit		A	1009
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	VC250KA35	lug-kit		A	1010
Square D LA/LH (L-frame 400 A) (SQD)	AL400LA	lug-kit	I-LINE, QMB, QED-2	A	715
Square D LA/LH (L-frame 400 A) (SQD)	AL400LAT	breaker-accessory		A	1014
Square D LA/LH (L-frame 400 A) (SQD)	AL400LH7	lug-kit		A	1011
Square D LA/LH (L-frame 400 A) (SQD)	CU400LA	lug-kit	I-LINE, QMB, QED-2	A	717
Square D LA/LH (L-frame 400 A) (SQD)	CVC400LA3	lug-kit		A	1011
Square D LA/LH (L-frame 400 A) (SQD)	CVC400LA5	lug-kit		A	1011
Square D LA/LH (L-frame 400 A) (SQD)	HPA-LM	padlock-attachment	NF, I-LINE	A	818
Square D LA/LH (L-frame 400 A) (SQD)	HPAXLM	padlock-attachment	NF, I-LINE	A	818
Square D LA/LH (L-frame 400 A) (SQD)	LA11021	breaker-accessory	I-LINE, NF	B	776
Square D LA/LH (L-frame 400 A) (SQD)	LA11027	breaker-accessory	I-LINE, NF	B	776
Square D LA/LH (L-frame 400 A) (SQD)	LA11028	breaker-accessory	I-LINE, NF	B	777
Square D LA/LH (L-frame 400 A) (SQD)	LA11029	breaker-accessory	I-LINE, NF	B	777
Square D LA/LH (L-frame 400 A) (SQD)	LA11037	breaker-accessory	I-LINE, NF	B	777
Square D LA/LH (L-frame 400 A) (SQD)	LA11042	breaker-accessory	I-LINE, NF	B	778
Square D LA/LH (L-frame 400 A) (SQD)	LA11121	breaker-accessory	I-LINE, NF	B	778
Square D LA/LH (L-frame 400 A) (SQD)	LA11124	breaker-accessory	I-LINE, NF	B	778
Square D LA/LH (L-frame 400 A) (SQD)	LA11212	breaker-accessory	I-LINE, NF	A	779
Square D LA/LH (L-frame 400 A) (SQD)	LA11352	breaker-accessory	I-LINE, NF	B	779
Square D LA/LH (L-frame 400 A) (SQD)	LA1CL	handle-lock	I-LINE	A	781
Square D LA/LH (L-frame 400 A) (SQD)	LA1G	breaker-accessory	I-LINE, NF	A	779
Square D LA/LH (L-frame 400 A) (SQD)	LAHT	handle-lock	NF, I-LINE	A	816
Square D LA/LH (L-frame 400 A) (SQD)	NQOD4	main-breaker-kit	NQOD	A	904

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D LA/LH (L-frame 400 A) (SQD)	PDC12LA4	lug-kit		A	1012
Square D LA/LH (L-frame 400 A) (SQD)	PDC4LA250	lug-kit		A	1012
Square D LA/LH (L-frame 400 A) (SQD)	PDC6LA20	lug-kit		A	1012
Square D LA/LH (L-frame 400 A) (SQD)	VC400LA3	lug-kit		A	1013
Square D LA/LH (L-frame 400 A) (SQD)	VC400LA35	lug-kit		A	1013
Square D LA/LH (L-frame 400 A) (SQD)	VC400LA5	lug-kit		A	1013
Square D LA/LH (L-frame 400 A) (SQD)	VC400LA7	lug-kit		A	1014
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600IN	breaker-accessory		A	1018
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI35	lug-kit		A	1015
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI35T	breaker-accessory		A	1018
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI5	lug-kit		A	1015
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI5T	breaker-accessory		A	1019
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI7	lug-kit		A	1015
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	CU600LI35	lug-kit		A	1016
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	CU600LI5	lug-kit		A	1016
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	CU600LI7	lug-kit		A	1016
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	CVC600LI5	lug-kit		A	1017
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	VC600LI3	lug-kit		A	1017
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	VC600LI5	lug-kit		A	1017
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	VC600LI7	lug-kit		A	1018
Square D MA/MH/MX/ME (M-frame 1000 A) (SQD)	AL1000MAT	breaker-accessory		A	1019
Square D MA/MH/MX/ME (M-frame 1000 A) (SQD)	AL900MAT	breaker-accessory		A	1019
Square D ML breakers (MLN panels) (SQD)	SK4515	conversion-kit	MLN	A	786
Square D ML breakers (MLN panels) (SQD)	SK4516	conversion-kit	MLN	A	786
Square D ML breakers (MLN panels) (SQD)	SK4517	conversion-kit	MLN	A	786
Square D ML breakers (MLN panels) (SQD)	SK4578	conversion-kit	MLN	A	786
Square D NA/NC/NX/NE (N-frame 1200 A) (SQD)	AL1200NE6T	breaker-accessory		A	1020
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	29348	breaker-accessory		A	1046
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	32508	lug-kit		A	1020
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	32510	lug-kit		A	1021

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	36965	barrier		A	1022
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	PDC12DG4	lug-kit		A	1021
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	PDC5DG20	lug-kit		A	1021
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	S36967	fastener		A	1045
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	AL150HD	lug-kit	I-LINE, QMB, QED-2	A	713
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	CU150HD	lug-kit	I-LINE, QMB, QED-2	A	716
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	CYA060HD	lug-kit		A	1022
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	CYA150HD	lug-kit		A	1023
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	HJPA	padlock-attachment	NQ, NF, I-LINE	C	885
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	PDC3HD2	lug-kit		A	1023
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	PDC6HD6	lug-kit		A	1023
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S29370	padlock-attachment	NQ, NF, I-LINE	C	888
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S29371	padlock-attachment	NQ, NF, I-LINE	A	888
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37422	padlock-attachment	NQ, NF, I-LINE	A	889
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37423	breaker-accessory		A	1026
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37425	breaker-accessory		A	1027
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37426	breaker-accessory		A	1027
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37429	breaker-accessory		A	1027
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37432	barrier		A	1025
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37433	breaker-accessory		A	1027
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37434	breaker-accessory		A	1028
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37436	barrier		A	1025

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37444	hardware-kit	NQ, NQOD, NF, QMB	A	875
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37446	barrier		A	1025
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37447	barrier		A	1026
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37449	barrier		A	1026
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	YA060HD	lug-kit		A	1024
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	YA150HD	lug-kit		A	1024
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	AL175JD	lug-kit	I-LINE, QMB, QED-2	A	714
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	AL250JD	lug-kit	I-LINE, QMB, QED-2	A	715
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	CU250JD	lug-kit	I-LINE, QMB, QED-2	A	717
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	CYA150JD	lug-kit		A	1028
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	CYA250J3	lug-kit		A	1029
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	HJPA	padlock-attachment	NQ, NF, I-LINE	C	885
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	PDC3JD20	lug-kit		A	1029
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	PDC6JD4	lug-kit		A	1029
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S29370	padlock-attachment	NQ, NF, I-LINE	C	888
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S29371	padlock-attachment	NQ, NF, I-LINE	A	888
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37422	padlock-attachment	NQ, NF, I-LINE	A	889
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37424	breaker-accessory		A	1032
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37427	breaker-accessory		A	1032
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37428	breaker-accessory		A	1032
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37430	breaker-accessory		A	1032

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37437	breaker-accessory		A	1033
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37438	breaker-accessory		A	1033
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37439	breaker-accessory		A	1033
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37440	barrier		A	1030
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37445	hardware-kit	NQ, NQOD, NF, QMB	A	875
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37448	barrier		A	1031
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37450	barrier		A	1031
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	YA150JD	lug-kit		A	1030
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	YA250J35	lug-kit		A	1030
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	29348	breaker-accessory		A	1046
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL400L61K3	lug-kit		A	1034
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL400L61K4	lug-kit		A	1035
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL600LF52K3	lug-kit		A	1035
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL600LS52K3	lug-kit		A	1035
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL600LS52K4	lug-kit		A	1036
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU400L61K3	lug-kit		A	1036
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU400L61K4	lug-kit		A	1036
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU600LF52K3	lug-kit		A	1037
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU600LS52K3	lug-kit		A	1037
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU600LS52K4	lug-kit		A	1037
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L31K3	lug-kit		A	1038

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L31K4	lug-kit		A	1038
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L51K3	lug-kit		A	1038
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L51K4	lug-kit		A	1039
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L71K3	lug-kit		A	1039
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA600L32K3	lug-kit		A	1039
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA600L32K4	lug-kit		A	1040
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA600L52K3	lug-kit		A	1040
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA600L52K4	lug-kit		A	1040
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	PDC12DG4L3	lug-kit		A	1041
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	PDC5DG20L3	lug-kit		A	1041
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S29370	padlock-attachment	NQ, NF, I-LINE	C	888
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S32477	breaker-accessory		A	1046
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S32478	breaker-accessory		A	1046
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S32562	barrier		A	1044
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S32563	barrier		A	1045
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S36967	fastener		A	1045
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S432475	breaker-accessory		A	1047
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S432476	breaker-accessory		A	1047
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L31K3	lug-kit		A	1041
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L51K3	lug-kit		A	1042
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L51K4	lug-kit		A	1042

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L71K3	lug-kit		A	1042
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L71K4	lug-kit		A	1043
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA600L32K3	lug-kit		A	1043
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA600L32K4	lug-kit		A	1043
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA600L52K3	lug-kit		A	1044
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA600L52K4	lug-kit		A	1044
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800M23K	lug-kit		C	1048
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800M23TK	lug-kit		A	1048
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800M23TK4	lug-kit		A	1048
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800P6TK	lug-kit		A	1049
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800P6TK4	lug-kit		A	1049
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800P7K	lug-kit		C	1049
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL1200P24TK	lug-kit		A	1050
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL1200P25TK	lug-kit		A	1050
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL1200P25TK4	lug-kit		A	1050
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800M23K	lug-kit		C	1048
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800M23TK	lug-kit		A	1048
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800M23TK4	lug-kit		A	1048
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800P6TK	lug-kit		A	1049
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800P6TK4	lug-kit		A	1049
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800P7K	lug-kit		C	1049
Square D PowerPact R-Frame (RG/RJ/RL) (SQD)	AL1200R53TK	lug-kit		A	1051
Square D Q4 (400 A, LA-type lugs) (SQD)	AHEXLI	breaker-accessory	NF, I-LINE	A	815
Square D Q4 (400 A, LA-type lugs) (SQD)	AL400LA	lug-kit	I-LINE, QMB, QED-2	A	715
Square D Q4 (400 A, LA-type lugs) (SQD)	AL400LAT	breaker-accessory		A	1014
Square D Q4 (400 A, LA-type lugs) (SQD)	AL400LH7	lug-kit		A	1011
Square D Q4 (400 A, LA-type lugs) (SQD)	CU400LA	lug-kit	I-LINE, QMB, QED-2	A	717
Square D Q4 (400 A, LA-type lugs) (SQD)	CVC400LA3	lug-kit		A	1011

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D Q4 (400 A, LA-type lugs) (SQD)	CVC400LA5	lug-kit		A	1011
Square D Q4 (400 A, LA-type lugs) (SQD)	HPA-LM	padlock-attachment	NF, I-LINE	A	818
Square D Q4 (400 A, LA-type lugs) (SQD)	HPAXLM	padlock-attachment	NF, I-LINE	A	818
Square D Q4 (400 A, LA-type lugs) (SQD)	LA11021	breaker-accessory	I-LINE, NF	B	776
Square D Q4 (400 A, LA-type lugs) (SQD)	LA11027	breaker-accessory	I-LINE, NF	B	776
Square D Q4 (400 A, LA-type lugs) (SQD)	LA11028	breaker-accessory	I-LINE, NF	B	777
Square D Q4 (400 A, LA-type lugs) (SQD)	LA11029	breaker-accessory	I-LINE, NF	B	777
Square D Q4 (400 A, LA-type lugs) (SQD)	LA11037	breaker-accessory	I-LINE, NF	B	777
Square D Q4 (400 A, LA-type lugs) (SQD)	LA11042	breaker-accessory	I-LINE, NF	B	778
Square D Q4 (400 A, LA-type lugs) (SQD)	LA11121	breaker-accessory	I-LINE, NF	B	778
Square D Q4 (400 A, LA-type lugs) (SQD)	LA11124	breaker-accessory	I-LINE, NF	B	778
Square D Q4 (400 A, LA-type lugs) (SQD)	LA11212	breaker-accessory	I-LINE, NF	A	779
Square D Q4 (400 A, LA-type lugs) (SQD)	LA11352	breaker-accessory	I-LINE, NF	B	779
Square D Q4 (400 A, LA-type lugs) (SQD)	LA1CL	handle-lock	I-LINE	A	781
Square D Q4 (400 A, LA-type lugs) (SQD)	LA1G	breaker-accessory	I-LINE, NF	A	779
Square D Q4 (400 A, LA-type lugs) (SQD)	LAHT	handle-lock	NF, I-LINE	A	816
Square D Q4 (400 A, LA-type lugs) (SQD)	NQOD4	main-breaker-kit	NQOD	A	904
Square D Q4 (400 A, LA-type lugs) (SQD)	PDC12LA4	lug-kit		A	1012
Square D Q4 (400 A, LA-type lugs) (SQD)	PDC4LA250	lug-kit		A	1012
Square D Q4 (400 A, LA-type lugs) (SQD)	PDC6LA20	lug-kit		A	1012
Square D Q4 (400 A, LA-type lugs) (SQD)	VC400LA3	lug-kit		A	1013
Square D Q4 (400 A, LA-type lugs) (SQD)	VC400LA35	lug-kit		A	1013
Square D Q4 (400 A, LA-type lugs) (SQD)	VC400LA5	lug-kit		A	1013
Square D Q4 (400 A, LA-type lugs) (SQD)	VC400LA7	lug-kit		A	1014
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	GFI2PA	padlock-attachment	NQ, NQOD, NQOB	A	885
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	HLO-1	handle-lock	NQ, NQOD, NEHB, NQOB, NA1B, NH1B	A	883
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	LX-26TF	trim	NQO	—	891
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	LX-32TF	trim	NQO	—	891

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	LX-40TF	trim	NQO	—	892
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	LX-45TF	trim	NQO	—	892
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	LX-49TF	trim	NQO	—	892
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	MDC-38TF	trim	NQO	—	893
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	MDC-41TF	trim	NQO	—	893
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	MDC-50TF	trim	NQO	—	893
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	MDC-53TF	trim	NQO	—	894
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	MSC-23TF	trim	NQO	—	894
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	MSC-26TF	trim	NQO	—	894
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	MSC-29TF	trim	NQO	—	895
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	MSC-35TF	trim	NQO	—	895
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	MSC-38TF	trim	NQO	—	895
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	MSC-44TF	trim	NQO	—	896
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	NQC-20TF	trim	NQO	—	896
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	NQC-24TF	trim	NQO	—	896
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	NQC-28TF	trim	NQO	—	897
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	NQC-32TF	trim	NQO	—	897
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	NQC-37TF	trim	NQO	—	897
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	NQC-42TF	trim	NQO	—	898
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	NQC-48TF	trim	NQO	—	898
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	PK2MB	hardware-kit		A	1001

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	PK3MB	hardware-kit		A	1001
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	PK4MB2HA	hardware-kit		A	1002
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	PK4MB2LA	hardware-kit		A	1002
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	PK5RK	hardware-kit		A	1003
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO1HPL	padlock-attachment	NQ, NQOD, NQOB	A	885
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO-1HT	breaker-accessory	NQ, NQOD, NQOB	A	881
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO1LO	handle-lock	NQ, NQOD, NQOB	A	883
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO-1PA	padlock-attachment	NQ, NQOD, NQOB	A	886
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO1PAF	padlock-attachment	NQ, NQOD, NQOB	A	886
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO-1PL	padlock-attachment	NQ, NQOD, NQOB	A	886
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO2DTI	breaker-accessory	NQ, NQOD, NQOB	A	882
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO2DTIM	hardware-kit	NQ, NQOD, NQOB	A	874
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO2PAF	padlock-attachment	NQ, NQOD, NQOB	A	887
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO3HT	handle-lock	NQ, NQOD, NQOB	A	884
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QOADV1PAF	padlock-attachment	NQ, NQOD, NQOB	A	887
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QOGFI2PAF	padlock-attachment	NQ, NQOD, NQOB	A	887
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QOHPL	padlock-attachment	NQ, NQOD, NQOB	A	887
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QOTHPA	padlock-attachment	NQ, NQOD, NQOB	A	888
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QOTHT	handle-lock	NQ, NQOD, NQOB	A	884
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	SK-5666	breaker-mounting-kit	NQOB, NA1B	C	901
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	SK5668	branch-connector-kit	NQOB	—	900

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	SK5669	breaker-mounting-kit	NQOB	C	901
Square D Y1B 1-pole (NY1B) (SQD)	HLO-1	handle-lock	NQ, NQOD, NEHB, NQOB, NA1B, NH1B	A	883
Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) (ZIN)	SECT	branch-connector-kit	ZIN-DIST	—	1875
Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) (ZIN)	SEHT	branch-connector-kit	ZIN-DIST	—	1876
Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) (ZIN)	SJD4T	branch-connector-kit	ZIN-DIST	—	1876
Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) (ZIN)	SKM8S	branch-connector-kit	ZIN-DIST	—	1876
TEB / TED / THED / TED4 / TED6 (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	1109
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	1102
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	1102
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	1103
TEB / TED / THED / TED4 / TED6 (GEA)	168D1930P3	filler-plate	SPECTRA-PP	—	1294
TEB / TED / THED / TED4 / TED6 (GEA)	168D1930P4	filler-plate	SPECTRA-PP	—	1294
TEB / TED / THED / TED4 / TED6 (GEA)	208C4262G26	filler-plate	SPECTRA-PP	A	1302
TEB / TED / THED / TED4 / TED6 (GEA)	208C4262G27	filler-plate	SPECTRA-PP	A	1303
TEB / TED / THED / TED4 / TED6 (GEA)	208C4262G28	filler-plate	SPECTRA-PP	A	1303
TEB / TED / THED / TED4 / TED6 (GEA)	208C4262G29	filler-plate	SPECTRA-PP	A	1304
TEB / TED / THED / TED4 / TED6 (GEA)	208C4262G30	filler-plate	SPECTRA-PP	A	1305
TEB / TED / THED / TED4 / TED6 (GEA)	208C4262G31	filler-plate	SPECTRA-PP	A	1305
TEB / TED / THED / TED4 / TED6 (GEA)	252B1667P1	barrier	SPECTRA-PP	—	1288
TEB / TED / THED / TED4 / TED6 (GEA)	252B2056P8	filler-plate	SPECTRA-PP	—	1315
TEB / TED / THED / TED4 / TED6 (GEA)	254V644P1	fastener		A	1379
TEB / TED / THED / TED4 / TED6 (GEA)	331A3329P2	fastener	SPECTRA-PP	—	1344
TEB / TED / THED / TED4 / TED6 (GEA)	343L162G1	fastener		A	1379
TEB / TED / THED / TED4 / TED6 (GEA)	343L162G7	fastener		A	1379
TEB / TED / THED / TED4 / TED6 (GEA)	ACTFPKEB1P	filler-plate	SCP-PLUS	A	1169
TEB / TED / THED / TED4 / TED6 (GEA)	ACTFPKEB2P	filler-plate	SCP-PLUS	A	1170
TEB / TED / THED / TED4 / TED6 (GEA)	ACTFPKEB3P	filler-plate	SCP-PLUS	A	1170
TEB / TED / THED / TED4 / TED6 (GEA)	ACTHKEB1P	hardware-kit	SCP-PLUS	A	1182

Breaker family	Part	Component	Equipment family	Cl.	Pg
TEB / TED / THED / TED4 / TED6 (GEA)	ACTHKEB2P	hardware-kit	SCP-PLUS	A	1182
TEB / TED / THED / TED4 / TED6 (GEA)	ACTHKEB3P	hardware-kit	SCP-PLUS	A	1182
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB1P	branch-connector-kit	SCP-PLUS	A	1165
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB2P	branch-connector-kit	SCP-PLUS	A	1166
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB3P	branch-connector-kit	SCP-PLUS	A	1166
TEB / TED / THED / TED4 / TED6 (GEA)	AFP2TED	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1317
TEB / TED / THED / TED4 / TED6 (GEA)	AFP3ELD	filler-plate	SPECTRA-PP	A	1317
TEB / TED / THED / TED4 / TED6 (GEA)	AFP3TED	filler-plate	SPECTRA-PP	A	1320
TEB / TED / THED / TED4 / TED6 (GEA)	AFP4SED	filler-plate	SPECTRA-PP	A	1322
TEB / TED / THED / TED4 / TED6 (GEA)	AHKBE1	hardware-kit	SPECTRA-PP	A	1338
TEB / TED / THED / TED4 / TED6 (GEA)	AHKE1	hardware-kit	SPECTRA-PP	A	1339
TEB / TED / THED / TED4 / TED6 (GEA)	AHKEL1	hardware-kit	SPECTRA-PP	A	1340
TEB / TED / THED / TED4 / TED6 (GEA)	AMC4EBFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1261
TEB / TED / THED / TED4 / TED6 (GEA)	AMC4EBSFP	breaker-mounting-kit	SPECTRA-PP	A	1262
TEB / TED / THED / TED4 / TED6 (GEA)	AMC4SEFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1269
TEB / TED / THED / TED4 / TED6 (GEA)	AMC6EBFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1270
TEB / TED / THED / TED4 / TED6 (GEA)	AMC6EBSFP	breaker-mounting-kit	SPECTRA-PP	A	1271
TEB / TED / THED / TED4 / TED6 (GEA)	AMC6EL	breaker-mounting-kit	SPECTRA-PP	A	1272
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB4EB	branch-connector-kit	SPECTRA-PP	A	1228
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB4EBFP	branch-connector-kit	SPECTRA-PP	A	1229
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB4SE	branch-connector-kit	SPECTRA-PP	A	1236
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB4SEFP	branch-connector-kit	SPECTRA-PP	A	1237
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB6EB	branch-connector-kit	SPECTRA-PP	A	1238
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB6EBFP	branch-connector-kit	SPECTRA-PP	A	1238
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB6TEDL	filler-plate	SPECTRA-PP	—	1328
TEB / TED / THED / TED4 / TED6 (GEA)	ASPTED3P	breaker-mounting-kit	A-SERIES	—	1066
TEB / TED / THED / TED4 / TED6 (GEA)	MB133	main-breaker-kit	A-SERIES	A	1055
TEB / TED / THED / TED4 / TED6 (GEA)	N722EP16006B6	fastener	SPECTRA-PP	—	1346
TEB / TED / THED / TED4 / TED6 (GEA)	NHB150PK	branch-connector-kit	NHB	C	1151
TEB / TED / THED / TED4 / TED6 (GEA)	TED1DPK	branch-connector-kit	CCB-QMR	A	1118

Breaker family	Part	Component	Equipment family	Cl.	Pg
TEB / TED / THED / TED4 / TED6 (GEA)	TEDFP1	filler-plate	A-SERIES	—	1070
TEB / TED / THED / TED4 / TED6 (GEA)	TEL1DPK	branch-connector-kit	CCB-QMR	A	1119
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	139C5503P129	filler-plate	A-SERIES-PWR	—	1108
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	208C4262G13	filler-plate	SPECTRA-PP	A	1296
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	208C4262G14	filler-plate	SPECTRA-PP	A	1296
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	208C4262G15	filler-plate	SPECTRA-PP	A	1296
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	315A7048P20	connector-strap	A-SERIES-PWR	—	1105
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	315A7049P10	connector-strap	A-SERIES-PWR	—	1105
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	911E347P3	insulator	A-SERIES-PWR	—	1107
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AFP3EYD	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1318
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMC6EYFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1272
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMC6QBFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1279
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB4EY	branch-connector-kit	SPECTRA-PP	A	1229
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB4EYFP	branch-connector-kit	SPECTRA-PP	A	1230
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB6EY	branch-connector-kit	SPECTRA-PP	A	1239
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB6EYFP	branch-connector-kit	SPECTRA-PP	A	1239
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	ASPP6EY12D	branch-connector-kit	A-SERIES-PWR	A	1097
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	ASPP6EY6D	branch-connector-kit	A-SERIES-PWR	A	1097
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	MB423	main-breaker-kit	A-SERIES	A	1058
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	MB426	main-breaker-kit	A-SERIES	A	1059
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TEY3B	breaker-mounting-kit		A	1463
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TEY3B125	breaker-mounting-kit		A	1464
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TEYLD1	handle-lock	A-SERIES	A	1082
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TEYPLD1	padlock-attachment	A-SERIES	A	1088
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TEYXHT2	handle-lock	A-SERIES	A	1082
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TEYXHT2K	handle-lock	A-SERIES	A	1082
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TEYXHT3	handle-lock	A-SERIES	A	1082
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TEYXHT3K	handle-lock	A-SERIES	A	1083
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TEYXPLD1	padlock-attachment	A-SERIES	A	1088
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	1070
TFJ / TFK / THFK / TFL (GEA)	139C5503P90	filler-plate	A-SERIES-PWR	—	1109

Breaker family	Part	Component	Equipment family	Cl.	Pg
TFJ / TFK / THFK / TFL (GEA)	208C4262G1	filler-plate	SPECTRA-PP	A	1294
TFJ / TFK / THFK / TFL (GEA)	208C4262G2	filler-plate	SPECTRA-PP	A	1299
TFJ / TFK / THFK / TFL (GEA)	208C4262G3	filler-plate	SPECTRA-PP	A	1304
TFJ / TFK / THFK / TFL (GEA)	208C4262G6	filler-plate	SPECTRA-PP	A	1312
TFJ / TFK / THFK / TFL (GEA)	208C4262G7	filler-plate	SPECTRA-PP	A	1314
TFJ / TFK / THFK / TFL (GEA)	ACTFPKSF	filler-plate	SCP-PLUS	A	1171
TFJ / TFK / THFK / TFL (GEA)	ACTHKSF	hardware-kit	SCP-PLUS	A	1183
TFJ / TFK / THFK / TFL (GEA)	AFP3TFD	filler-plate	SPECTRA-PP	A	1321
TFJ / TFK / THFK / TFL (GEA)	AFP3TFS	filler-plate	SPECTRA-PP	A	1321
TFJ / TFK / THFK / TFL (GEA)	AHKBF1	hardware-kit	SPECTRA-PP	A	1338
TFJ / TFK / THFK / TFL (GEA)	AMC2FJFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1250
TFJ / TFK / THFK / TFL (GEA)	AMC2FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	1251
TFJ / TFK / THFK / TFL (GEA)	AMC2FLSFP	breaker-mounting-kit	SPECTRA-PP	A	1252
TFJ / TFK / THFK / TFL (GEA)	AMC3FJFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1256
TFJ / TFK / THFK / TFL (GEA)	AMC3FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	1257
TFJ / TFK / THFK / TFL (GEA)	AMC3FLSFP	breaker-mounting-kit	SPECTRA-PP	A	1258
TFJ / TFK / THFK / TFL (GEA)	AMC4FJFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1264
TFJ / TFK / THFK / TFL (GEA)	AMC4FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	1265
TFJ / TFK / THFK / TFL (GEA)	AMC4FLSFP	breaker-mounting-kit	SPECTRA-PP	A	1266
TFJ / TFK / THFK / TFL (GEA)	AMC6FJFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1275
TFJ / TFK / THFK / TFL (GEA)	AMC6FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	1276
TFJ / TFK / THFK / TFL (GEA)	AMC6FLSFP	breaker-mounting-kit	SPECTRA-PP	A	1277
TFJ / TFK / THFK / TFL (GEA)	AMCB2FJ	branch-connector-kit	SPECTRA-PP	A	1218
TFJ / TFK / THFK / TFL (GEA)	AMCB2FJFP	branch-connector-kit	SPECTRA-PP	A	1219
TFJ / TFK / THFK / TFL (GEA)	AMCB2FJFPTF	branch-connector-kit	SPECTRA-PP	A	1219
TFJ / TFK / THFK / TFL (GEA)	AMCB3FJ	branch-connector-kit	SPECTRA-PP	A	1223
TFJ / TFK / THFK / TFL (GEA)	AMCB3FJFP	branch-connector-kit	SPECTRA-PP	A	1223
TFJ / TFK / THFK / TFL (GEA)	AMCB3FJFPTF	branch-connector-kit	SPECTRA-PP	A	1224
TFJ / TFK / THFK / TFL (GEA)	AMCB4FJ	branch-connector-kit	SPECTRA-PP	A	1232
TFJ / TFK / THFK / TFL (GEA)	AMCB4FJFP	branch-connector-kit	SPECTRA-PP	A	1233
TFJ / TFK / THFK / TFL (GEA)	AMCB4FJFPTF	branch-connector-kit	SPECTRA-PP	A	1233
TFJ / TFK / THFK / TFL (GEA)	AMCB6FJ	branch-connector-kit	SPECTRA-PP	A	1242
TFJ / TFK / THFK / TFL (GEA)	AMCB6FJFP	branch-connector-kit	SPECTRA-PP	A	1242
TFJ / TFK / THFK / TFL (GEA)	AMCB6FJFPTF	branch-connector-kit	SPECTRA-PP	A	1243
TFJ / TFK / THFK / TFL (GEA)	TF2DPK	branch-connector-kit	CCB-QMR	A	1119
THQB / THHQB / TXQB (GEA)	139C5362P2	filler-plate	A-SERIES-PWR	—	1107
THQB / THHQB / TXQB (GEA)	208C4262G10	filler-plate	SPECTRA-PP	A	1295
THQB / THHQB / TXQB (GEA)	208C4262G11	filler-plate	SPECTRA-PP	A	1295
THQB / THHQB / TXQB (GEA)	208C4262G12	filler-plate	SPECTRA-PP	A	1295
THQB / THHQB / TXQB (GEA)	315A7048P20	connector-strap	A-SERIES-PWR	—	1105
THQB / THHQB / TXQB (GEA)	315A7049P10	connector-strap	A-SERIES-PWR	—	1105
THQB / THHQB / TXQB (GEA)	911E347P3	insulator	A-SERIES-PWR	—	1107
THQB / THHQB / TXQB (GEA)	AFP3QBD	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1318
THQB / THHQB / TXQB (GEA)	AMC6EYFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1272
THQB / THHQB / TXQB (GEA)	AMC6QBFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1279

Breaker family	Part	Component	Equipment family	Cl.	Pg
THQB / THHQB / TXQB (GEA)	ASPP6QB12D	branch-connector-kit	A-SERIES-PWR	A	1098
THQB / THHQB / TXQB (GEA)	ASPP6QB6D	branch-connector-kit	A-SERIES-PWR	A	1099
THQB / THHQB / TXQB (GEA)	MB612	main-breaker-kit	A-SERIES	A	1060
THQB / THHQB / TXQB (GEA)	MB613	main-breaker-kit	A-SERIES	A	1060
THQB / THHQB / TXQB (GEA)	MB614	main-breaker-kit	A-SERIES	A	1061
THQB / THHQB / TXQB (GEA)	MB616	main-breaker-kit	A-SERIES	A	1061
THQB / THHQB / TXQB (GEA)	TEY3B	breaker-mounting-kit		A	1463
THQB / THHQB / TXQB (GEA)	THL103	handle-lock	A-SERIES, NLAB	A	1083
THQB / THHQB / TXQB (GEA)	THP100	padlock-attachment	A-SERIES, NLAB	A	1089
THQB / THHQB / TXQB (GEA)	THQGFPLD1	padlock-attachment	A-SERIES	A	1089
THQB / THHQB / TXQB (GEA)	THT104	handle-lock	A-SERIES	A	1084
THQB / THHQB / TXQB (GEA)	TQ3HTK	handle-lock	A-SERIES	A	1084
THQB / THHQB / TXQB (GEA)	TQ4HTK	handle-lock	A-SERIES	A	1085
THQB / THHQB / TXQB (GEA)	TQBS1	fastener	A-SERIES	A	1073
THQB / THHQB / TXQB (GEA)	TQBSI	fastener		A	1464
THQB / THHQB / TXQB (GEA)	TQHT1	handle-lock	A-SERIES	A	1085
THQB / THHQB / TXQB (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	1070
THQB / THHQB / TXQB (GEA)	TQPL	handle-lock	A-SERIES	A	1086
THQB / THHQB / TXQB (GEA)	TQPPL	padlock-attachment	A-SERIES	A	1092
THQL / THHQL / TXQL (GEA)	THL103	handle-lock	A-SERIES, NLAB	A	1083
THQL / THHQL / TXQL (GEA)	THP100	padlock-attachment	A-SERIES, NLAB	A	1089
THQL / THHQL / TXQL (GEA)	THQGFPLD1	padlock-attachment	A-SERIES	A	1089
THQL / THHQL / TXQL (GEA)	THT104	handle-lock	A-SERIES	A	1084
THQL / THHQL / TXQL (GEA)	TQ3HTK	handle-lock	A-SERIES	A	1084
THQL / THHQL / TXQL (GEA)	TQ4HTK	handle-lock	A-SERIES	A	1085
THQL / THHQL / TXQL (GEA)	TQHT1	handle-lock	A-SERIES	A	1085
THQL / THHQL / TXQL (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	1070
THQL / THHQL / TXQL (GEA)	TQPL	handle-lock	A-SERIES	A	1086
THQL / THHQL / TXQL (GEA)	TQPPL	padlock-attachment	A-SERIES	A	1092
TJD / TJJ / TJK / THJK (GEA)	343L162G11	fastener		A	1404
TJD / TJJ / TJK / THJK (GEA)	343L162G20	fastener		A	1404
TJD / TJJ / TJK / THJK (GEA)	ACTFPKJD	filler-plate	SCP-PLUS	A	1170
TJD / TJJ / TJK / THJK (GEA)	ACTHKJD	hardware-kit	SCP-PLUS	A	1183
TJD / TJJ / TJK / THJK (GEA)	ACTMKJD	branch-connector-kit	SCP-PLUS	A	1166
TJD / TJJ / TJK / THJK (GEA)	AFP6TJD	filler-plate	SPECTRA-PP	A	1325
TJD / TJJ / TJK / THJK (GEA)	AFP6TJS	filler-plate	SPECTRA-PP	A	1325
TJD / TJJ / TJK / THJK (GEA)	AHKJ1	hardware-kit	SPECTRA-PP	A	1342
TJD / TJJ / TJK / THJK (GEA)	AMC2JKFP	breaker-mounting-kit	SPECTRA-PP	A	1254
TJD / TJJ / TJK / THJK (GEA)	AMC3JKFP	breaker-mounting-kit	SPECTRA-PP	A	1259

Breaker family	Part	Component	Equipment family	Cl.	Pg
TJD / TJJ / TJK / THJK (GEA)	AMC4JKFP	breaker-mounting-kit	SPECTRA-PP	A	1267
TJD / TJJ / TJK / THJK (GEA)	AMC6JKFP	breaker-mounting-kit	SPECTRA-PP	A	1278
TJD / TJJ / TJK / THJK (GEA)	TJ4DPK	branch-connector-kit	CCB-QMR	A	1123
TJD / TJJ / TJK / THJK (GEA)	TJ6DPK	branch-connector-kit	CCB-QMR	A	1124
TKM / THKM (GEA)	252B1768G1	filler-plate	SPECTRA-PP	—	1314
TKM / THKM (GEA)	252B1768G2	filler-plate	SPECTRA-PP	—	1315
TKM / THKM (GEA)	455C592P1	breaker-accessory	SPECTRA-PP	—	1354
TKM / THKM (GEA)	455C592P2	breaker-accessory	SPECTRA-PP	—	1354
TKM / THKM (GEA)	AFP6SKS	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1325
TKM / THKM (GEA)	AMC2KMFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1254
TKM / THKM (GEA)	AMC3KMFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1260
TKM / THKM (GEA)	AMCB2KM	branch-connector-kit	SPECTRA-PP	A	1221
TKM / THKM (GEA)	AMCB2KMFP	branch-connector-kit	SPECTRA-PP	A	1222
TKM / THKM (GEA)	AMCB3KM	branch-connector-kit	SPECTRA-PP	A	1226
TKM / THKM (GEA)	AMCB3KMFP	branch-connector-kit	SPECTRA-PP	A	1226
TKM / THKM (GEA)	TK12SPK	branch-connector-kit	CCB-QMR	A	1125
TKM / THKM (GEA)	TK8SPK	branch-connector-kit	CCB-QMR	A	1125
TQD / THQD (GEA)	139C5500P81	mounting-bracket	A-SERIES-PWR	—	1105
TQD / THQD (GEA)	139C5503P64	filler-plate	A-SERIES-PWR	—	1108
TQD / THQD (GEA)	139C5702AQDG1	connector-strap	A-SERIES-PWR	—	1101
TQD / THQD (GEA)	139C5702BQDG1	connector-strap	A-SERIES-PWR	—	1102
TQD / THQD (GEA)	139C5702CQDG1	connector-strap	A-SERIES-PWR	—	1103
TQD / THQD (GEA)	208C4262G20	filler-plate	SPECTRA-PP	A	1299
TQD / THQD (GEA)	208C4262G21	filler-plate	SPECTRA-PP	A	1300
TQD / THQD (GEA)	208C4262G22	filler-plate	SPECTRA-PP	A	1300
TQD / THQD (GEA)	208C4262G23	filler-plate	SPECTRA-PP	A	1301
TQD / THQD (GEA)	208C4262G24	filler-plate	SPECTRA-PP	A	1301
TQD / THQD (GEA)	208C4262G25	filler-plate	SPECTRA-PP	A	1302
TQD / THQD (GEA)	343L184G18	fastener		A	1465
TQD / THQD (GEA)	ACTFPKQD2P	filler-plate	SCP-PLUS	A	1170
TQD / THQD (GEA)	ACTFPKQD3P	filler-plate	SCP-PLUS	A	1171
TQD / THQD (GEA)	ACTHKQD2P	hardware-kit	SCP-PLUS	A	1183
TQD / THQD (GEA)	ACTHKQD3P	hardware-kit	SCP-PLUS	A	1183
TQD / THQD (GEA)	ACTMKQD2P	branch-connector-kit	SCP-PLUS	A	1167
TQD / THQD (GEA)	ACTMKQD3P	branch-connector-kit	SCP-PLUS	A	1167
TQD / THQD (GEA)	AFP2QDD	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1317
TQD / THQD (GEA)	AFP3QDD	filler-plate	SPECTRA-PP, SPECTRA-SB	A	1319
TQD / THQD (GEA)	AHKBQ1	hardware-kit	SPECTRA-PP	A	1339
TQD / THQD (GEA)	AHKQ1	hardware-kit	SPECTRA-PP	A	1343
TQD / THQD (GEA)	AMC4QDFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1268
TQD / THQD (GEA)	AMC6QDFP	breaker-mounting-kit	SPECTRA-PP, SPECTRA-SB	A	1280
TQD / THQD (GEA)	AMCB4QDFP	branch-connector-kit	SPECTRA-PP	A	1235
TQD / THQD (GEA)	AMCB6QDFP	branch-connector-kit	SPECTRA-PP	A	1245
TQD / THQD (GEA)	ASP2PTQD3P	conversion-kit	A-SERIES	—	1074
TQD / THQD (GEA)	ASPP6QD6D	branch-connector-kit	A-SERIES-PWR	A	1099
TQD / THQD (GEA)	ASPTQD3P	breaker-mounting-kit	A-SERIES	—	1066
TQD / THQD (GEA)	MB512	main-breaker-kit	A-SERIES	A	1059
TQD / THQD (GEA)	MB513	main-breaker-kit	A-SERIES	A	1059
TQD / THQD (GEA)	MB516	main-breaker-kit	A-SERIES	A	1060
TQD / THQD (GEA)	TEDFP1	filler-plate	A-SERIES	—	1070
TQD / THQD (GEA)	TQ2DPK	branch-connector-kit	CCB-QMR	A	1126
TQD / THQD (GEA)	TQDFM1	breaker-accessory	A-SERIES	—	1081

Breaker family	Part	Component	Equipment family	Cl.	Pg
TQD / THQD (GEA)	TQDLPDL1	padlock-attachment	A-SERIES	A	1090
TQD / THQD (GEA)	TQDPLD1	padlock-attachment	A-SERIES, SPECTRA-PP	A	1090
TQD / THQD (GEA)	TQPDLD2	padlock-attachment	A-SERIES	A	1091
TQD / THQD (Q-Line 225A) (GEA)	TCAL25	lug		A	1465
TQD / THQD (Q-Line 225A) (GEA)	TCALK325	lug-kit		A	1465
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	4176B57	deadfront	PRL3A	—	362
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	4176B70	deadfront	PRL3A	—	364
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KCDPFBP	breaker-mounting-kit	CDP	A	86
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KCDPLA400	breaker-mounting-kit	CDP	A	88
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KCDPNBP	breaker-mounting-kit	CDP	A	91
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KMP40KD3400	conversion-kit	MP40, CDP, NFB, MP2	A	146
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	439
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KPRL4LAP	breaker-mounting-kit	PRL4, PRL4X	A	449
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KPRL4NBP	breaker-mounting-kit	PRL4, PRL4X	A	456
Tri-Pac (EAT)	KCDPFBP	breaker-mounting-kit	CDP	A	86
Tri-Pac (EAT)	KCDPLA400	breaker-mounting-kit	CDP	A	88
Tri-Pac (EAT)	KCDPNBP	breaker-mounting-kit	CDP	A	91
Tri-Pac (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	439
Tri-Pac (EAT)	KPRL4LAP	breaker-mounting-kit	PRL4, PRL4X	A	449
Tri-Pac (EAT)	KPRL4NBP	breaker-mounting-kit	PRL4, PRL4X	A	456
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40ED225-3	branch-connector-kit	MP40, MP2	C	140
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KC225-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	75
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KF100-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	76
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KJ225-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	77
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KK400-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	77
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KL400-3	branch-connector-kit	MP40, MP2	C	143
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KL600-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	78

Breaker family	Part	Component	Equipment family	Cl.	Pg
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KM800-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	79
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KN1200-3	branch-connector-kit	CDP, MP40, MP2, NFB	A	80
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MPED1K	branch-connector-kit	MP40, MP2	C	144
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPCA	breaker-mounting-kit	CDP	A	84
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPDK	conversion-kit	CDP	A	96
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	85
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPEHD	conversion-kit	CDP	A	97
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	85
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPFBP	breaker-mounting-kit	CDP	A	86
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPFD	conversion-kit	CDP	A	98
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPFDB	conversion-kit	CDP	A	99
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPHKD	conversion-kit	CDP	A	100
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPJD	conversion-kit	CDP	A	101
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPJDB	conversion-kit	CDP	A	102
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	87
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPKD	conversion-kit	CDP	A	102
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPKDB	conversion-kit	CDP	A	103
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLA400	breaker-mounting-kit	CDP	A	88
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	88
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	89
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLCL	breaker-mounting-kit	CDP	A	90
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLD	conversion-kit	CDP	A	104
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	90
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPMDL	conversion-kit	CDP	A	105
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPNBP	breaker-mounting-kit	CDP	A	91
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	92
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPND	conversion-kit	CDP	A	106
Westinghouse pre-Series C industrial MCCBs (EAT)	TAD3	conversion-kit	PRL4, CDP, MP40, MP2, EP	A	488

Breaker family	Part	Component	Equipment family	Cl.	Pg
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF100DS	branch-connector-kit	ZIN-DIST	—	1874
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF100SB	branch-connector-kit	ZIN-DIST	—	1874
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF100SS	branch-connector-kit	ZIN-DIST	—	1874
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF200DS	branch-connector-kit	ZIN-DIST	—	1874
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF200SB	branch-connector-kit	ZIN-DIST	—	1875
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF400DS	branch-connector-kit	ZIN-DIST	—	1875
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF400SB	branch-connector-kit	ZIN-DIST	—	1875
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF600DS	branch-connector-kit	ZIN-DIST	—	1875
Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) (ZIN)	DSLQB	branch-connector-kit	ZIN-DIST	—	1873
Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) (ZIN)	DSLQFB	branch-connector-kit	ZIN-DIST	—	1873
Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) (ZIN)	QFP2T	main-breaker-kit	ZIN-Q	C	1877
Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) (ZIN)	UBIZRBK12	bus-assembly	ZIN-Q	C	1878

12.5 Component-type index

Component type	Parts (OEM PN → page)
main-breaker-kit	2A1909-19 (EAT), 2A1909-29 (EAT), 2A1909-4 (EAT), 2A1909-8 (EAT), 2A1909-9 (EAT), KB11A2B (EAT), KB11A2T (EAT), KB11AFB (EAT), KB11AFT (EAT), KB11S2B (EAT), KB11S2T (EAT), KB11SFB (EAT), KB11SFT (EAT), KB13A2B (EAT), KB13A2T (EAT), KB13AFB (EAT), KB13AFT (EAT), KB13S2B (EAT), KB13S2T (EAT), KB13SFB (EAT), KB13SFT (EAT), KB21A2B (EAT), KB21A2T (EAT), KB21AFB (EAT), KB21AFT (EAT), KB21S2B (EAT), KB21S2T (EAT), KB21SFB (EAT), KB21SFT (EAT), KB23A2B (EAT), KB23A2T (EAT), KB23AFB (EAT), KB23AFT (EAT), KB23S2B (EAT), KB23S2T (EAT), KB23SFB (EAT), KB23SFT (EAT), KB41A14B (EAT), KB41A14T (EAT), KB41AJB (EAT), KB41AJT (EAT), KB41AKB (EAT), KB41AKT (EAT), KB41S14B (EAT), KB41S14T (EAT), KB41SJB (EAT), KB41SJT (EAT), KB41SKB (EAT), KB41SKT (EAT), KB43A34B (EAT), KB43A34T (EAT), KB43AJB (EAT), KB43AJT (EAT), KB43AKB (EAT), KB43AKT (EAT), KB43S34B (EAT), KB43S34T (EAT), KB43SJB (EAT), KB43SJT (EAT), KB43SKB (EAT), KB43SKT (EAT), KB61S16B (EAT), KB61S16T (EAT), KB63S36B (EAT), KB63S36T (EAT), MB133 (GEA), MB133WB (GEA), MB233 (GEA), MB2332 (GEA), MB2332WB (GEA), MB233WB (GEA), MB332 (GEA), MB332WB (GEA), MB333 (GEA), MB333WB (GEA), MB423 (GEA), MB426 (GEA), MB512 (GEA), MB513 (GEA), MB516 (GEA), MB612 (GEA), MB613 (GEA), MB614 (GEA), MB616 (GEA), CDP7MBKQJ3 (SIE), MBKBC1NBA (SIE), MBKBC3 (SIE), MBKBC3NBA (SIE), MBKBL1 (SIE), MBKBL1A (SIE), MBKBL3 (SIE), MBKBL3A (SIE), MBKED1 (SIE), MBKED1A (SIE), MBKED3 (SIE), MBKED3A (SIE), MBKFD1 (SIE), MBKFD1A (SIE), MBKFD3 (SIE), MBKFD3A (SIE), MBKJD1 (SIE), MBKJD1A (SIE), MBKJD3 (SIE), MBKJD3A (SIE), MBKJD3B (SIE), MBKNB1 (SIE), MBKNB3 (SIE), MBKQJ1A (SIE), MBKQJ3 (SIE), MBKQJ3A (SIE), MBKQR1 (SIE), MBKQR1A (SIE), MBKQR3 (SIE), MBKQR3A (SIE), MBKVA41A (SIE), MBKVA41B (SIE), MBKVA5262A (SIE), MBKVA5262B (SIE), MBKVA5363A (SIE), MBKVAH3200A (SIE), MBKVAH3250A (SIE), MBKVAM3150A (SIE), MBKVAM3200A (SIE), MBKVAM3225A (SIE), MBKVAM3250A (SIE), SMBKED1 (SIE), SMBKED3 (SIE), SMBKFD1 (SIE), SMBKFD3 (SIE), SMBKJD1 (SIE), SMBKJD3 (SIE), SMBKL6 (SIE), SMBKL6D (SIE), SMBKLG (SIE), SMBKLG1D (SIE), SMBKMG (SIE), SMBKMG1D (SIE), SMSKHCP (SIE), N100MFI (SQD), N150MH (SQD), N250MJ (SQD), N250MKC (SQD), N400M (SQD), N600MPPL (SQD), NF250SFBH (SQD), NF250SFBJ (SQD), NF600SFBH (SQD), NF600SFBJ (SQD), NF600SFBPPL (SQD), NQMB2HJ (SQD), NQMB2HJ14 (SQD), NQMB2KI (SQD), NQMB2Q (SQD), NQMB2Q14 (SQD), NQMB4LA (SQD), NQMB6PPL (SQD), NQOD4 (SQD), NQODJK (SQD), NQODQ2 (SQD), NQODQB (SQD), NQSFB2HJ (SQD), NQSFB2Q (SQD), NQSFB4HJ (SQD), NQSFB4Q (SQD), NQSFB6PPL (SQD), QFP2T (ZIN)

Component type	Parts (OEM PN → page)
main-lug-kit	2A1909-1 (EAT), 2A1909-10 (EAT), 2A1909-11 (EAT), 2A1909-12 (EAT), 2A1909-13 (EAT), 2A1909-14 (EAT), 2A1909-15 (EAT), 2A1909-17 (EAT), 2A1909-18 (EAT), 2A1909-2 (EAT), 2A1909-20 (EAT), 2A1909-21 (EAT), 2A1909-23 (EAT), 2A1909-24 (EAT), 2A1909-26 (EAT), 2A1909-27 (EAT), 2A1909-5 (EAT), 2A1909-6 (EAT), 5PLUG31200TC (EAT), 5PLUG3400SC (EAT), 5PLUG3600SC (EAT), 5PLUG3800SC (EAT), BRL200 (EAT), KL11AMO (EAT), KL11AMS (EAT), KL11AVO (EAT), KL11AVS (EAT), KL11SCO (EAT), KL11SCS (EAT), KL11SMO (EAT), KL11SMS (EAT), KL11SVO (EAT), KL11SVS (EAT), KL13AMO (EAT), KL13AMS (EAT), KL13AVO (EAT), KL13AVS (EAT), KL13SCO (EAT), KL13SCS (EAT), KL13SMO (EAT), KL13SMS (EAT), KL13SVO (EAT), KL13SVS (EAT), KL21AMO (EAT), KL21AMS (EAT), KL21AVO (EAT), KL21AVS (EAT), KL21SCO (EAT), KL21SCS (EAT), KL21SMO (EAT), KL21SMS (EAT), KL21SVO (EAT), KL21SVS (EAT), KL23AMO (EAT), KL23AMS (EAT), KL23AVO (EAT), KL23AVS (EAT), KL23SCO (EAT), KL23SCS (EAT), KL23SMO (EAT), KL23SMS (EAT), KL23SVO (EAT), KL23SVS (EAT), KL41AMO (EAT), KL41AMS (EAT), KL41AVO (EAT), KL41AVS (EAT), KL41SCO (EAT), KL41SMO (EAT), KL41SMS (EAT), KL41SVO (EAT), KL41SVS (EAT), KL43AMO (EAT), KL43AMS (EAT), KL43AVO (EAT), KL43AVS (EAT), KL43SCO (EAT), KL43SMO (EAT), KL43SMS (EAT), KL43SVO (EAT), KL43SVS (EAT), KL61CMO (EAT), KL61CMS (EAT), KL61CVO (EAT), KL61CVS (EAT), KL61SMO (EAT), KL61SMS (EAT), KL61SVO (EAT), KL61SVS (EAT), KL61TMO (EAT), KL61TMS (EAT), KL61TVO (EAT), KL61TVS (EAT), KL63CMO (EAT), KL63CMS (EAT), KL63CVO (EAT), KL63CVS (EAT), KL63SMO (EAT), KL63SMS (EAT), KL63SVO (EAT), KL63SVS (EAT), KL63TMO (EAT), KL63TMS (EAT), KL63TVO (EAT), KL63TVS (EAT), KNA1B1C (FPE), AMB2120CA (GEA), AMB2120DCA (GEA), AMB2120DMA (GEA), AMB2120DMC (GEA), AMB2120DN (GEA), AMB2120MA (GEA), AMB2120N (GEA), AMB2250CA (GEA), AMB2250DCA (GEA), AMB2600CA (GEA), AMB2600DCA (GEA), AMB2600MA (GEA), AMB2600MC (GEA), AMB2800CA (GEA), AMB2800DCA (GEA), AMB3120CA (GEA), AMB3120DCA (GEA), AMB3120DMA (GEA), AMB3120DMC (GEA), AMB3120DN (GEA), AMB3120MA (GEA), AMB3120MC (GEA), AMB3120N (GEA), AMB3250CA (GEA), AMB3250DCA (GEA), AMB3600CA (GEA), AMB3600DCA (GEA), AMB3600MA (GEA), AMB3600MC (GEA), AMB3800CA (GEA), AMB3800DCA (GEA), AML3120CFP (GEA), AML3120FP (GEA), AML3250CFP (GEA), AML3250FP (GEA), AML3250SFP (GEA), AML3400CFP (GEA), AML3400FP (GEA), AML3400SFP (GEA), AML3600CFP (GEA), AML3600FP (GEA), AML3600SFP (GEA), AML3800CFP (GEA), AML3800FP (GEA), MLA1 (GEA), MLA2 (GEA), MLA41 (GEA), MLA61 (GEA), MLA62 (GEA), MLR1 (GEA), MLR2 (GEA), MLR41 (GEA), MLR61 (GEA), MLT1 (GEA), MLT2 (GEA), MLT41 (GEA), MLT42 (GEA), 4MLKA1 (SIE), 4MLKA1A (SIE), 4MLKA1B (SIE), 4MLKA3 (SIE), 4MLKA3A (SIE), 4MLKA3B (SIE), 4MLKC1 (SIE), 4MLKC1A (SIE), 4MLKC3 (SIE), 4MLKC3A (SIE), LK11600N2 (SIE), LK11750N2 (SIE), LK12350N2 (SIE), LK12500N2 (SIE), LK12500N2E (SIE), LK12600N2 (SIE), LK12750N2 (SIE), LK13500N2 (SIE), LK13750N2 (SIE), LK13750N2E (SIE), LK14500N2 (SIE), LK14500N2E (SIE), LK15600N2 (SIE), LK15750N2 (SIE), LK16750N2 (SIE), LK31600N2 (SIE), LK31750N2 (SIE), LK32350N2 (SIE), LK32500N2 (SIE), LK32500N2E (SIE), LK32600N2 (SIE), LK32750N2 (SIE), LK33500N2 (SIE), LK33750N2 (SIE), LK33750N2E (SIE), LK34500N2 (SIE), LK34500N2E (SIE), LK35600N2 (SIE), LK35750N2 (SIE), LK36750N2 (SIE), MLKA1 (SIE), MLKA1A (SIE), MLKA3 (SIE), MLKA3A (SIE), MLKC1 (SIE), MLKC1A (SIE), MLKC3 (SIE), MLKC3A (SIE), PLL44 (SIE), PLL46 (SIE), PLL48 (SIE), SMLK12 (SIE), HCM400VCA (SQD), HCM600VCA (SQD), HCM800VCA (SQD), HCW1200VCA (SQD), HCW400VCA (SQD), HCW600VCA (SQD), HCW800VCA (SQD), NFALV1 (SQD), NFALV2 (SQD), NFALV4 (SQD), NFALV6 (SQD), NFCUM1 (SQD), NFCUM2 (SQD), NFCUM4 (SQD), NFCUM6 (SQD), NFCUV1 (SQD), NFCUV2 (SQD), NFCUV4 (SQD), NFCUV6 (SQD), NQALMA6 (SQD), NQALV1 (SQD), NQALV2 (SQD), NQALV4 (SQD), NQALV6 (SQD), NQCUM1 (SQD), NQCUM2 (SQD), NQCUM4 (SQD), NQCUM6 (SQD), NQCUV1 (SQD), NQCUV2 (SQD), NQCUV4 (SQD), NQCUV6 (SQD), QMB12CLA (SQD), QMB8CLA (SQD), LK-15 (ZIN), LK-22 (ZIN)
sub-feed-lug-kit	2A1909-16 (EAT), 2A1909-22 (EAT), 2A1909-25 (EAT), 2A1909-28 (EAT), 2A1909-3 (EAT), 2A1909-7 (EAT), 3BRS225 (EAT), 3BRSF150 (EAT), BRS225 (EAT), BRSF125 (EAT), BRSF150 (EAT), KL11AMF (EAT), KL11AVF (EAT), KL11SCF (EAT), KL11SMF (EAT), KL11SVF (EAT), KL13AMF (EAT), KL13AVF (EAT), KL13SCF (EAT), KL13SMF (EAT), KL13SVF (EAT), KL21AMF (EAT), KL21AVF (EAT), KL21SCF (EAT), KL21SMF (EAT), KL21SVF (EAT), KL23AMF (EAT), KL23AVF (EAT), KL23SCF (EAT), KL23SMF (EAT), KL23SVF (EAT), PSFFJ6 (SIE), PSFJL6 (SIE), NF125SFL (SQD), NF250SFL (SQD), NF400SFL (SQD), NQOD100SFL (SQD), NQOD225SFL (SQD), NQSFL1 (SQD), NQSFL2 (SQD), NQSFL4 (SQD), QO-100ASF (SQD), QO-225ASF (SQD), QOB2125SL (SQD), QOB3125SL (SQD), S33930 (SQD), S33931 (SQD), SF-100LP (SQD), SF-225LP (SQD), SL100 (SQD), SL1200 (SQD), SL1200P5 (SQD), SL1200P6 (SQD), SL1200P7 (SQD), SL-225 (SQD), SL250 (SQD), SL400 (SQD), SL800 (SQD), SL800FT (SQD), SL800M5 (SQD)
through-feed-lug-kit	AFL120 (GEA), AFL600 (GEA), NF125FTL (SQD), NF250FTL (SQD), NF400FTL (SQD), NQFTL2H (SQD), NQFTL2L (SQD), NQFTL4H (SQD), NQFTL4L (SQD)

Component type	Parts (OEM PN → page)
lug-kit	2T400K (EAT), 2T400KCW (EAT), 2T402K (EAT), 2TA400K (EAT), 2TA400KCW (EAT), 2TA401K (EAT), 2TA401KCW (EAT), 2TA401LDK (EAT), 2TA402K (EAT), 2TA603LDK (EAT), 2TA603LDKCW (EAT), 3T100FB (EAT), 3T125EF (EAT), 3T150FB (EAT), 3T20FB (EAT), 3T225FD (EAT), 3T400K (EAT), 3T400KCW (EAT), 3T402K (EAT), 3T631LK (EAT), 3T632LK (EAT), 3T632LKW (EAT), 3TA100FD (EAT), 3TA100G3K (EAT), 3TA100G6K (EAT), 3TA125E3K (EAT), 3TA125E6K (EAT), 3TA125EF (EAT), 3TA150EF (EAT), 3TA150F3K (EAT), 3TA150F6K (EAT), 3TA150FB (EAT), 3TA160EFK (EAT), 3TA225FD (EAT), 3TA225FDK (EAT), 3TA250FJ3 (EAT), 3TA250FJ6 (EAT), 3TA250J3K (EAT), 3TA250J6K (EAT), 3TA400K (EAT), 3TA400K3K (EAT), 3TA400K6K (EAT), 3TA400KCW (EAT), 3TA401K (EAT), 3TA401KCW (EAT), 3TA401LDK (EAT), 3TA402K (EAT), 3TA50FB (EAT), 3TA603LDK (EAT), 3TA603LDKCW (EAT), 3TA631LK (EAT), 3TA632LK (EAT), 3TA632LKW (EAT), 4T400K (EAT), 4T400KCW (EAT), 4T402K (EAT), 4T631LK (EAT), 4T632LK (EAT), 4T632LKW (EAT), 4TA160EFK (EAT), 4TA400K (EAT), 4TA400KCW (EAT), 4TA401K (EAT), 4TA401KCW (EAT), 4TA401LDK (EAT), 4TA402K (EAT), 4TA603LDK (EAT), 4TA603LDKCW (EAT), 4TA631LK (EAT), 4TA632LK (EAT), 4TA632LKW (EAT), T1000NB1 (EAT), T1200NB3 (EAT), T1200NB3M (EAT), T1600RD (EAT), T250FJ (EAT), T250KB (EAT), T300K (EAT), T350K (EAT), T350LK (EAT), T600MA1 (EAT), T602LD (EAT), T602LDCW (EAT), T700NB1 (EAT), T800MA1 (EAT), TA1000NB1 (EAT), TA1200NB1 (EAT), TA1201NB1 (EAT), TA1600RD (EAT), TA2000RD (EAT), TA250FJ (EAT), TA250KB (EAT), TA300K (EAT), TA350K (EAT), TA350LK (EAT), TA450LD (EAT), TA602LD (EAT), TA602LDCW (EAT), TA632L (EAT), TA700MA1 (EAT), TA700MA1CWT (EAT), TA700NB1 (EAT), TA800MA2 (EAT), TA800MA2CWT (EAT), TA801MA (EAT), TA801MACWT (EAT), N32 (FPE), NM34 (FPE), NM36 (FPE), NM38 (FPE), 75C140045G705 (GEA), AMK350 (GEA), AMK500 (GEA), AMK600 (GEA), AMK750 (GEA), AMKP101 (GEA), AMKP202 (GEA), AMKP2101 (GEA), AMKP2202 (GEA), AMKP2250 (GEA), AMKP2300 (GEA), AMKP2303 (GEA), AMKP2350 (GEA), AMKP2400 (GEA), AMKP2404 (GEA), AMKP250 (GEA), AMKP2500 (GEA), AMKP2600 (GEA), AMKP2750 (GEA), AMKP300 (GEA), AMKP303 (GEA), AMKP350 (GEA), AMKP400 (GEA), AMKP404 (GEA), AMKP500 (GEA), AMKP600 (GEA), AMKP750 (GEA), FCALK12 (GEA), FCALK13 (GEA), FCALK14 (GEA), FCALK15 (GEA), FCALK15LV (GEA), FCALK16 (GEA), FCALK16LV (GEA), FCALK218H (GEA), FCALK318H (GEA), KLP101 (GEA), KLP300 (GEA), KLP500 (GEA), KLP600 (GEA), KLP750 (GEA), TCAL19PD3 (GEA), TCAL28PD3 (GEA), TCAL40PD3 (GEA), TCALK2121 (GEA), TCALK2122 (GEA), TCALK2124 (GEA), TCALK2125 (GEA), TCALK261 (GEA), TCALK281 (GEA), TCALK291 (GEA), TCALK3121 (GEA), TCALK3122 (GEA), TCALK3124 (GEA), TCALK3125 (GEA), TCALK318 (GEA), TCALK324 (GEA), TCALK325 (GEA), TCALK329 (GEA), TCALK341 (GEA), TCALK343 (GEA), TCALK347 (GEA), TCALK361 (GEA), TCALK363 (GEA), TCALK381 (GEA), TCALK391 (GEA), TCLK265 (GEA), TCLK365 (GEA), TCOK265 (GEA), TCOK365 (GEA), 12CLN500 (SIE), 2TA2N8750 (SIE), 2TA3N8750 (SIE), 2TA3NG750 (SIE), 2TA4N8500 (SIE), 2TA4NG500 (SIE), 2TA4P8500 (SIE), 3TA12JG04 (SIE), 3TA1CG30 (SIE), 3TA1DG30 (SIE), 3TA1QR300 (SIE), 3TA2N8750 (SIE), 3TA3DG02 (SIE), 3TA3FG20 (SIE), 3TA3N8750 (SIE), 3TA3NG750 (SIE), 3TA4N8500 (SIE), 3TA4NG500 (SIE), 3TA4NG500H (SIE), 3TA4P8500 (SIE), 3TA6DG04 (SIE), 3TA6FG04 (SIE), 3TA6JG20 (SIE), 3TA6PG750 (SIE), 3TAW1FG350 (SIE), 3TC1DG30 (SIE), 3TC1GG20 (SIE), 3TC1Q1 (SIE), 3TC1QR250 (SIE), 3TC4NG500 (SIE), 3TCW1FG350 (SIE), 3TW1CG20 (SIE), 3TW1DG20 (SIE), 3TW1FG350 (SIE), 3TW1JG600 (SIE), 4TA1DG30 (SIE), 4TA3NG750 (SIE), 4TA4NG500 (SIE), 4TAW1FG350 (SIE), 4TW1DG20 (SIE), 4TW1FG350 (SIE), 4TW1JG600 (SIE), BNK350N (SIE), CCM800 (SIE), CCM800K2 (SIE), CCM800K3 (SIE), CCN1200 (SIE), CCN1200K2 (SIE), CCN1200K3 (SIE), CCQ225 (SIE), LK11750 (SIE), LK12500 (SIE), LK13500 (SIE), LK13750 (SIE), LK14500 (SIE), LK31750 (SIE), LK32500 (SIE), LK33500 (SIE), LK33750 (SIE), LK34500 (SIE), LKB4 (SIE), LKB6 (SIE), LKB8 (SIE), LKF4 (SIE), LKF6 (SIE), TA12JG04 (SIE), TA1DG30 (SIE), TA1Q300 (SIE), TA1QR300 (SIE), TA2J6500T10 (SIE), TA2K8750 (SIE), TA2N8750 (SIE), TA3DG02 (SIE), TA3FG20 (SIE), TA3K350 (SIE), TA3N8750 (SIE), TA3P8750 (SIE), TA4H500 (SIE), TA4N8500 (SIE), TA4P8500 (SIE), TA6DG04 (SIE), TA6FG04 (SIE), TA6JG20 (SIE), TA6PG750 (SIE), TAW1FG350 (SIE), TC1DG30 (SIE), TC1QR250 (SIE), TC3K350 (SIE), TCIQ250 (SIE), TCW1FG350 (SIE), TW1DG20 (SIE), TW1FG350 (SIE), TW1JG600 (SIE), 32508 (SQD), 32510 (SQD), AL100FA (SQD), AL100FA4 (SQD), AL100FD (SQD), AL100TF (SQD), AL1200P24TK (SQD), AL1200P25TK (SQD), AL1200P25TK4 (SQD), AL1200R53K (SQD), AL1200R53TK (SQD), AL150FA (SQD), AL150HD (SQD), AL175JD (SQD), AL250JD (SQD), AL250KA (SQD), AL250KI (SQD), AL30FD (SQD), AL400L61K3 (SQD), AL400L61K4 (SQD), AL400LA (SQD), AL400LH7 (SQD), AL50FA (SQD), AL600LF52K3 (SQD), AL600LI35 (SQD), AL600LI5 (SQD), AL600LI7 (SQD), AL600LS52K3 (SQD), AL600LS52K4 (SQD), AL800M23K (SQD), AL800M23TK (SQD), AL800M23TK4 (SQD), AL800P6TK (SQD), AL800P6TK4 (SQD), AL800P7K (SQD), CU100FA (SQD), CU100FD (SQD), CU100TF (SQD), CU1200R53K (SQD), CU150HD (SQD), CU250JD (SQD), CU250KA (SQD), CU30FA4 (SQD), CU400L61K3 (SQD), CU400L61K4 (SQD), CU400LA (SQD), CU600LF52K3 (SQD), CU600LI35 (SQD), CU600LI5 (SQD), CU600LI7 (SQD), CU600LS52K3 (SQD), CU600LS52K4 (SQD), CVC100FA (SQD), CVC250KA3 (SQD), CVC400LA3 (SQD), CVC400LA5 (SQD), CVC600LI5 (SQD), CYA060HD (SQD), CYA150HD (SQD), CYA150JD (SQD), CYA250J3 (SQD), CYA400L31K3 (SQD), CYA400L31K4 (SQD), CYA400L51K3 (SQD), CYA400L51K4 (SQD), CYA400L71K3 (SQD), CYA600L32K3 (SQD), CYA600L32K4 (SQD), CYA600L52K3 (SQD), CYA600L52K4 (SQD), NQALMN6 (SQD), PDC12DG4 (SQD), PDC12DG4L3 (SQD), PDC12LA4 (SQD), PDC3FA2 (SQD), PDC3HD2 (SQD), PDC3JD20 (SQD), PDC4LA250 (SQD), PDC5DG20 (SQD), PDC5DG20L3 (SQD), PDC6FA6 (SQD), PDC6HD6 (SQD), PDC6JD4 (SQD), PDC6LA20 (SQD), VC100FA (SQD), VC250KA3 (SQD), VC250KA35 (SQD), VC400LA3 (SQD), VC400LA35 (SQD), VC400LA5 (SQD), VC400LA7 (SQD), VC600LI3 (SQD), VC600LI5 (SQD), VC600LI7 (SQD), YA060HD (SQD), YA150HD (SQD), YA150JD (SQD), YA250J35 (SQD), YA400L31K3 (SQD), YA400L51K3 (SQD), YA400L51K4 (SQD), YA400L71K3 (SQD), YA400L71K4 (SQD), YA600L32K3 (SQD), YA600L32K4 (SQD), YA600L52K3 (SQD), YA600L52K4 (SQD)

Component type	Parts (OEM PN → page)
lug	5PNL1200 (EAT), 5PNL400 (EAT), 5PNL600 (EAT), 5PNL800 (EAT), NL300 (EAT), 121B7147P1 (GEA), 252B3638 (GEA), 763B795P8 (GEA), 763B795P9 (GEA), FCAL12 (GEA), FCAL13 (GEA), FCAL14 (GEA), FCAL15 (GEA), FCAL16 (GEA), GEA2-750 (GEA), TC012 (GEA), TC0121 (GEA), TC0131 (GEA), TC018 (GEA), TC024 (GEA), TC041 (GEA), TC043 (GEA), TC061 (GEA), TC063 (GEA), TC081A (GEA), TC091 (GEA), TCAL12 (GEA), TCAL121 (GEA), TCAL122 (GEA), TCAL124 (GEA), TCAL125 (GEA), TCAL12A (GEA), TCAL131 (GEA), TCAL14 (GEA), TCAL15 (GEA), TCAL18 (GEA), TCAL18LV (GEA), TCAL19PD1 (GEA), TCAL24 (GEA), TCAL25 (GEA), TCAL27 (GEA), TCAL28PD1 (GEA), TCAL29 (GEA), TCAL29LV (GEA), TCAL40PD1 (GEA), TCAL41 (GEA), TCAL43 (GEA), TCAL47 (GEA), TCAL61 (GEA), TCAL63 (GEA), TCAL81 (GEA), TCAL91 (GEA), TCLK43 (GEA), TCO124 (GEA), TCO125 (GEA), TCO29 (GEA), CCE125 (SIE), CCF250 (SIE), CCL600 (SIE), CCQ250 (SIE), LD1E060 (SIE), LD1E100 (SIE), LN1E100 (SIE), SA1E025 (SIE), TA1E6125 (SIE), TA1FD350A (SIE), TA1L6750 (SIE), TA1Q1 (SIE), TA2J630 (SIE), TA2J6500 (SIE), TA2K500 (SIE), TA2N750 (SIE), TA3K500 (SIE), TA4P750 (SIE), TA5P600 (SIE), TA6ED06 (SIE), TA6FD04 (SIE), TA6GG04 (SIE), TA6JD20 (SIE), TA6R600 (SIE), TC1ED6150 (SIE), TC1FD350 (SIE), TC1J6600 (SIE), TC1Q1 (SIE), TC2J6500 (SIE), TC2K500 (SIE), TC5R600 (SIE), 40251-016-51 (SQD), 40251-018-50 (SQD), 4025101851 (SQD), 40251-162-50 (SQD), 40251-287-50 (SQD), 40256-014-50 (SQD), 40256-034-50 (SQD), 40256-039-50 (SQD), 40560-270-50 (SQD), NQ100AN (SQD), NQ200AN (SQD), Q1100AN (SQD), Q1150AN (SQD), QO70AN (SQD), VCEL02114S1 (SQD), VCEL030516H1 (SQD), VCEL05012H1 (SQD), VCEL06012H1 (SQD), VCEL07512H1 (SQD), VCELC02114S1 (SQD), VCELC03038H1 (SQD), VCELC05012H1 (SQD), VCELC07512H1 (SQD)

Component type	Parts (OEM PN → page)
branch-connector-kit	1C96608 (EAT), 1C96609 (EAT), 2C11642 (EAT), CCA4K (EAT), CED3K (EAT), CED4BK (EAT), CED4K (EAT), CFD3K (EAT), CFD4BK (EAT), CFD4K (EAT), CJD4K (EAT), CJDS4BK (EAT), CJDS4K (EAT), CKD4K (EAT), CKDS4BK (EAT), CKDS4K (EAT), CLD4K (EAT), CLDS4BK (EAT), CMD4K (EAT), CND4K (EAT), KFDP4XT (EAT), KFDP5XT (EAT), KFDPB6X-2 (EAT), KFDPW11X-6 (EAT), KFDPW11X-8 (EAT), KFDPW15X-12 (EAT), KFDPW9X-4 (EAT), KPHCC3175S (EAT), KPRL1BAB (EAT), KPRL2GHB (EAT), KPRL3ABA06 (EAT), KPRL3ABA06-1 (EAT), KPRL3ABA12 (EAT), KPRL3ABA12-1 (EAT), KPRL3ABA18 (EAT), KPRL3ABA18-1 (EAT), KPRL3ABA24 (EAT), KPRL3ABA24-1 (EAT), KPRL3AED2 (EAT), KPRL3AED3 (EAT), KPRL3AFD1 (EAT), KPRL3AFD2 (EAT), KPRL3AFD3 (EAT), KPRL3AGB06 (EAT), KPRL3AGB06-1 (EAT), KPRL3AGB12 (EAT), KPRL3AGB12-1 (EAT), KPRL3AGB18 (EAT), KPRL3AGB18-1 (EAT), KPRL3AGB24 (EAT), KPRL3AGB24-1 (EAT), KPRL3CA (EAT), KPRL3CF3 (EAT), KPRL3ED (EAT), KPRL3FD (EAT), KPRL3X21T (EAT), KPRL3X22 (EAT), KPRL3X22T (EAT), KPRL3X23 (EAT), KPRL3X23T (EAT), KPRL3XBA06 (EAT), KPRL3XBA06-1 (EAT), KPRL3XBA12 (EAT), KPRL3XBA12-1 (EAT), KPRL3XBA18 (EAT), KPRL3XBA18-1 (EAT), KPRL3XBA24 (EAT), KPRL3XBA24-1 (EAT), KPRL3XGB06 (EAT), KPRL3XGB06-1 (EAT), KPRL3XGB12 (EAT), KPRL3XGB12-1 (EAT), KPRL3XGB18 (EAT), KPRL3XGB18-1 (EAT), KPRL3XGB24 (EAT), KPRL3XGB24-1 (EAT), KPRL44X (EAT), KPRL45X (EAT), KPRL45X1 (EAT), KPRL45XS (EAT), KPRL4B6XS (EAT), KPRL4B6XT (EAT), KPRL4CD (EAT), KPRL4CED (EAT), KPRL4CSL (EAT), KPRL4CSM (EAT), KPRL4CSN (EAT), KPRL4W11X (EAT), KPRL4W15X (EAT), KPRL4W9X (EAT), MP40CHH (EAT), MP40ED225-3 (EAT), MP40KC225-2 (EAT), MP40KC225-3 (EAT), MP40KCHH225-2 (EAT), MP40KCHH225-3 (EAT), MP40KF100-2 (EAT), MP40KF100-3 (EAT), MP40KF225-2 (EAT), MP40KF225-3 (EAT), MP40KJ225-3 (EAT), MP40KK400-3 (EAT), MP40KL400-3 (EAT), MP40KL600-3 (EAT), MP40KLL400-3 (EAT), MP40KM800-3 (EAT), MP40KN1200-3 (EAT), MPED1K (EAT), PH2CC1 (EAT), PH3CC3 (EAT), PH6E-3 (EAT), KBDP1C (FPE), KBDP2C (FPE), KBDP3C (FPE), KBDP4C (FPE), KBDP5C (FPE), KCDP-1A (FPE), KCDP1C (FPE), KCDP2C (FPE), KCDP3C (FPE), KCDP4C (FPE), KCDP5C (FPE), NAIB-NEF (FPE), NDPNE (FPE), NDPNEJ (FPE), ACSMKSG (GEA), ACSMKSK (GEA), ACSMKTB4 (GEA), ACSMKTB6 (GEA), ACSMKTB8 (GEA), ACTMKEB1P (GEA), ACTMKEB2P (GEA), ACTMKEB3P (GEA), ACTMKJD (GEA), ACTMKQD2P (GEA), ACTMKQD3P (GEA), ACTMKSE (GEA), ACTMKSF (GEA), ACTMKSG (GEA), AMCB2FGMFP (GEA), AMCB2FJ (GEA), AMCB2FJFP (GEA), AMCB2FJFPTF (GEA), AMCB2GM (GEA), AMCB2GMFP (GEA), AMCB2KM (GEA), AMCB2KMFP (GEA), AMCB3FGMFP (GEA), AMCB3FJ (GEA), AMCB3FJFP (GEA), AMCB3FJFPTF (GEA), AMCB3GM (GEA), AMCB3GMFP (GEA), AMCB3KM (GEA), AMCB3KMFP (GEA), AMCB3LBFP (GEA), AMCB4EB (GEA), AMCB4EBFP (GEA), AMCB4EY (GEA), AMCB4EYFP (GEA), AMCB4FBFP (GEA), AMCB4FDBFP (GEA), AMCB4FGBFP (GEA), AMCB4FJ (GEA), AMCB4FJFP (GEA), AMCB4FJFPTF (GEA), AMCB4GB (GEA), AMCB4GBFP (GEA), AMCB4QDFP (GEA), AMCB4SE (GEA), AMCB4SEFP (GEA), AMCB6EB (GEA), AMCB6EBFP (GEA), AMCB6EY (GEA), AMCB6EYFP (GEA), AMCB6FBFP (GEA), AMCB6FDBFP (GEA), AMCB6FGBFP (GEA), AMCB6FJ (GEA), AMCB6FJFP (GEA), AMCB6FJFPTF (GEA), AMCB6GB (GEA), AMCB6GBFP (GEA), AMCB6QDFP (GEA), ASPP6EY12D (GEA), ASPP6EY6D (GEA), ASPP6FB6D (GEA), ASPP6QB12D (GEA), ASPP6QB6D (GEA), ASPP6QD6D (GEA), ASPP6SE6D (GEA), ASPP6SF3S (GEA), ASPP6SG3S (GEA), NHB150PK (GEA), NLAB100PK (GEA), SF2DPK (GEA), SG6DPK (GEA), SG6SPK (GEA), SGS6K (GEA), SK12SPK (GEA), SK8SPK (GEA), TB1DPK (GEA), TB1SPK (GEA), TB4SBK (GEA), TB4SPK (GEA), TB6SPK (GEA), TB8SPK (GEA), TED1DPK (GEA), TED1DPK2 (GEA), TEL1DPK (GEA), TF2DPK (GEA), THFP22SPK (GEA), THFP62DPK (GEA), THFP62SPK (GEA), THFP63DPK (GEA), THFP63DPKC (GEA), THFP63DPKJ (GEA), THFP63SPK (GEA), THFP64SPK (GEA), THFP65SPK (GEA), THFP66SPK (GEA), THFP67SPK (GEA), THJV6DPK (GEA), THLC1DPK (GEA), THLC1SPK (GEA), THLC4SPK (GEA), THLCDPK (GEA), TJ4DPK (GEA), TJ6DPK (GEA), TJ6SPK (GEA), TJ9SPK (GEA), TK12SPK (GEA), TK8SPK (GEA), TK9SPK (GEA), TKL12SPK (GEA), TP8SPK (GEA), TQ2DPK (GEA), BAMCB35KMGE (OTH), BAMCB3FJGE (OTH), BAMCB3GMGE (OTH), BAMCB6EBGE (OTH), BAMCB6EYGE (OTH), BAMCB6FJGE (OTH), BAMCB6GBGE (OTH), BAMCB6QDGE (OTH), BBDPNEF10FPE (OTH), BBDPNEJFPE (OTH), BBDPNJLFPE (OTH), BCDPNEF10FPE (OTH), BCDPNEJFPE (OTH), BCDPNFJFPE (OTH), BCDPNJLFPE (OTH), BEDITE (OTH), BEDSITE (OTH), BFDITE (OTH), BFDSITE (OTH), BFJITE (OTH), BJDITE (OTH), BJDSGLITE (OTH), BJDSITE (OTH), BJLITE (OTH), BLDITE (OTH), BMDITE (OTH), BNHB150GE (OTH), BPRL3AEDCH (OTH), BPRL3AFDCH (OTH), BQJITE (OTH), BQJSITE (OTH), BSEBP4 (OTH), BSGDGE (OTH), BTEDGE (OTH), BTELGE (OTH), BTFKGE (OTH), BTJK4GE (OTH), BTJK6GE (OTH), BTK12GE (OTH), BTK8GE (OTH), BTQDGE (OTH), 5EH2 (SIE), 5FJ2 (SIE), 5JJ2 (SIE), 6BL2C (SIE), 6CLE2 (SIE), 6CLF1 (SIE), 6CLJ1 (SIE), 6CLJ6 (SIE), 6CLL1 (SIE), 6E62 (SIE), 6F62 (SIE), 6JJ61 (SIE), 6JJ62 (SIE), 6LL61 (SIE), 6M61C (SIE), 6N61C (SIE), 6QJ2 (SIE), 6QR2 (SIE), 6SCJ1 (SIE), 6SCL1 (SIE), 6SCL61C (SIE), 6SJL1 (SIE), 6SLL1 (SIE), BBKB32 (SIE), BBKEB32 (SIE), BBKED32 (SIE), BBKGB32 (SIE), BBKNB32 (SIE), BBKQ1 (SIE), BBKQ2 (SIE), BBKQR1 (SIE), BBKQR2 (SIE), BBKVA4P2P3 (SIE), BBKVA5262P2S (SIE), BBKVA52P3T (SIE), CD55JJ2 (SIE), CD62JJ2 (SIE), CDP525-FD63BT (SIE), CDP525-FJ3B (SIE), CDP525-FJ3BT (SIE), CDP71PHED4 (SIE), CDP7BQ3 (SIE), CDPFJ3 (SIE), EH3K (SIE), F602 (SIE), F602D (SIE), F657 (SIE), F657D (SIE), F671 (SIE), F671D (SIE), FJ3K (SIE), JJ3K (SIE), MG1 (SIE), MG1D (SIE), NEB64K (SIE), NEB65K (SIE), NG1D (SIE), S3VA41T (SIE), S3VA41TD (SIE), S3VA41TDHD (SIE), S3VA52T (SIE), S3VA52TD (SIE), S3VA53T (SIE), S3VA53T2D (SIE), S3VA53TD (SIE), S3VA54T (SIE), S3VA54T2D (SIE), S3VA54TD (SIE), S3VA55TD (SIE), S3VA57TD (SIE), S3VA63T (SIE), S3VA63TD (SIE), S3VA64T (SIE), S3VA64TD (SIE), SBL (SIE), SBLBD (SIE), SCE (SIE), SCED (SIE), SCF (SIE), SCFD (SIE), SCJ (SIE), SCJD (SIE), SCL (SIE), SCLD (SIE), SDG (SIE), SDGD (SIE), SE6 (SIE), SE6D (SIE), SEB (SIE), SEBD (SIE), SF6 (SIE), SF6D (SIE), SFG (SIE), SFGD (SIE), SGB2 (SIE), SGB2D (SIE), SJ1 (SIE), SJ1D (SIE), SJ2D (SIE), SJG (SIE), SJG1D (SIE), SJG2D (SIE), SL6 (SIE), SL6D (SIE), SLG (SIE), SLGD (SIE), SLM1 (SIE), SLM1D (SIE), SMND (SIE), SNB (SIE), SNBD (SIE), SQJ (SIE), SQJD (SIE), SQR (SIE), SQRD (SIE), SSCJ (SIE), SSCJD (SIE), SSCL (SIE), SSCLD (SIE), SSJ1 (SIE), SSJ1D (SIE), SSL6 (SIE), SSL6D (SIE), SSMND (SIE), VB610 (SIE), QMB-206-EX (SQD), QMB-210-EX (SQD), QMB-220-EX (SQD), SK5668 (SQD), SKNF250 (SQD), SKNF600 (SQD), SKNQBC (SQD), SKNQOD225 (SQD), DSLNEJT (ZIN), DSLNET (ZIN), DSLNFT (ZIN), DSLNJT (ZIN), DSLNM (ZIN), DSLNMS (ZIN), DSLQB (ZIN), DSLQFB (ZIN), FPENEFT (ZIN), QSF100DS (ZIN), QSF100SB (ZIN), QSF100SS (ZIN), QSF200DS (ZIN), QSF200SB (ZIN), QSF400DS (ZIN), QSF400SB (ZIN), QSF600DS (ZIN), SECT (ZIN), SEHT (ZIN), SJD4T (ZIN), SKM8S (ZIN)

Component type	Parts (OEM PN → page)
breaker-mounting-kit	EEEHD220015SB2 (EAT), EEMODULEFS (EAT), KCDPCA (EAT), KCDPED225 (EAT), KCDPFB100 (EAT), KCDPFB150 (EAT), KCDPFBP (EAT), KCDPKB (EAT), KCDPLA400 (EAT), KCDPLA600 (EAT), KCDPLB (EAT), KCDPLCL (EAT), KCDPMA (EAT), KCDPMC (EAT), KCDPNB (EAT), KCDPNBP (EAT), KCDPNC (EAT), KPRL4CA (EAT), KPRL4CKD (EAT), KPRL4CND (EAT), KPRL4ED (EAT), KPRL4ED2 (EAT), KPRL4FBP (EAT), KPRL4FD (EAT), KPRL4FD1 (EAT), KPRL4FD2 (EAT), KPRL4FDCL (EAT), KPRL4JDS (EAT), KPRL4JDT (EAT), KPRL4KDS (EAT), KPRL4KDT (EAT), KPRL4LAP (EAT), KPRL4LC (EAT), KPRL4LCL (EAT), KPRL4LD (EAT), KPRL4LDS (EAT), KPRL4LG (EAT), KPRL4MC (EAT), KPRL4MD (EAT), KPRL4NBP (EAT), KPRL4NC (EAT), KPRL4ND (EAT), KPRL4X12 (EAT), KPRL4X22 (EAT), KPRL4X32 (EAT), KPRL4X334S (EAT), KPRL4X334T (EAT), KPRL4X336 (EAT), KPRL4X34 (EAT), KPRL4X35 (EAT), PH6C3 (EAT), NFHARDWARE (FPE), 565B837G1 (GEA), 565B837G2 (GEA), 571B595DDG1 (GEA), 571B595DDG2 (GEA), AMC2FGMFP (GEA), AMC2FJFP (GEA), AMC2FJFPTF (GEA), AMC2FLSFP (GEA), AMC2GMFP (GEA), AMC2JKFP (GEA), AMC2KMFP (GEA), AMC3FGMFP (GEA), AMC3FJFP (GEA), AMC3FJFPTF (GEA), AMC3FLSFP (GEA), AMC3GMFP (GEA), AMC3JKFP (GEA), AMC3KMFP (GEA), AMC4EBFP (GEA), AMC4EBSFP (GEA), AMC4FDBFP (GEA), AMC4FDSFP (GEA), AMC4FGBFP (GEA), AMC4FJFP (GEA), AMC4FJFPTF (GEA), AMC4FLSFP (GEA), AMC4GBFP (GEA), AMC4JKFP (GEA), AMC4QDFP (GEA), AMC4SEFP (GEA), AMC6EBFP (GEA), AMC6EBSFP (GEA), AMC6EL (GEA), AMC6EYFP (GEA), AMC6FBFP (GEA), AMC6FDBFP (GEA), AMC6FDSPF (GEA), AMC6FGBFP (GEA), AMC6FJFP (GEA), AMC6FJFPTF (GEA), AMC6FLSFP (GEA), AMC6GBFP (GEA), AMC6JKFP (GEA), AMC6QBFP (GEA), AMC6QDFP (GEA), ASPA23P (GEA), ASPFB12P (GEA), ASPFB3P (GEA), ASPFBRD3P (GEA), ASPTED3P (GEA), ASPTQD3P (GEA), ASPXT13P (GEA), ASPXT23P (GEA), ASPXT43P (GEA), FCDDF1 (GEA), FCDDF2 (GEA), FCDDF3 (GEA), FCDDF4 (GEA), NLAB-TQC3 (GEA), RGRPIFRK (GEA), SGPC1 (GEA), SGPC2 (GEA), SGPC7 (GEA), TE12PD1 (GEA), TE12PD2 (GEA), TE13PC1 (GEA), TE13PD1 (GEA), TE13PD2 (GEA), TEY3B (GEA), TEY3B125 (GEA), TF22PD1 (GEA), TF22PD2 (GEA), TF23PC1 (GEA), TF23PD1 (GEA), TF23PD2 (GEA), TJ42PD1A (GEA), TJ42PD2A (GEA), TJ43PC1A (GEA), TJ43PD1A (GEA), TJ43PD2A (GEA), TJ62PD1A (GEA), TJ62PD2A (GEA), TJ63PC1A (GEA), TJ63PD1A (GEA), TJ63PD2A (GEA), TK102PD1A (GEA), TK102PD2A (GEA), TK103PC1A (GEA), TK103PC2A (GEA), TK103PD1A (GEA), TK103PD2A (GEA), TK122PD1A (GEA), TK122PD2A (GEA), TK123PC1A (GEA), TK123PC2A (GEA), TK123PD1A (GEA), TK123PD2A (GEA), TK62PD1A (GEA), TK62PD2A (GEA), TK63PD1A (GEA), TK63PD2A (GEA), TK82PD1A (GEA), TK82PD2A (GEA), TK83PC1A (GEA), TK83PC2A (GEA), TK83PD1A (GEA), TK83PD2A (GEA), BCDPCACH (OTH), BCDPFBCH (OTH), BCDPKBCH (OTH), BCDPLACH (OTH), BCDPLBCH (OTH), BCDPLCCH (OTH), BCDPMACH (OTH), BCDPNBCH (OTH), BPHCCH (OTH), BPHECH (OTH), BPRL4BEDCH (OTH), BPRL4BFDCH (OTH), BPRL4BJDSCH (OTH), BPRL4BKDSCH (OTH), BPRL4BLDSCH (OTH), BPRLCACH (OTH), BPRLEDCH (OTH), BPRLFDCH (OTH), BPRLJDSCH (OTH), BPRLJDTCH (OTH), BPRLKDSCH (OTH), BPRLKDTCH (OTH), BPRLLDCH (OTH), BPRLMDCH (OTH), BPRLNDCH (OTH), CDPEDT (OTH), CDPKDT (OTH), CDPSGS (OTH), CDPSGT (OTH), CDPTEDT (OTH), CDPTHEDT (OTH), CDPTJJS (OTH), CU-NFJ (OTH), MB9301 (SIE), MBPG1600 (SIE), MBPG1601 (SIE), MBR9302 (SIE), MM9301 (SIE), MM9302 (SIE), PC2637 (SIE), PC2638 (SIE), PC2657 (SIE), PC2658 (SIE), PC4753 (SIE), PC4754 (SIE), PC5660 (SIE), PC5661 (SIE), PC5662 (SIE), PC5663 (SIE), PC5664 (SIE), PC5665 (SIE), PC5666 (SIE), PC5667 (SIE), PC5777 (SIE), PC5778 (SIE), PCBDFC3 (SIE), PCBDFC4 (SIE), PCBDRC3 (SIE), PCBDRC4 (SIE), PCBFFC3 (SIE), PCBFFC4 (SIE), PCBFRC3 (SIE), PCBFRC4 (SIE), PCBJRC3 (SIE), PCBJRC4 (SIE), PCBLFC4 (SIE), PCBMRC3 (SIE), PCBNRC3 (SIE), PCXD3 (SIE), PCXD4 (SIE), PCXFT (SIE), PCXLT (SIE), PCXM3 (SIE), PCXMH (SIE), PCXMT (SIE), PCXN3 (SIE), PCXPT (SIE), PM2657 (SIE), PM2658 (SIE), PM4754 (SIE), PM5663 (SIE), PM5666 (SIE), TCE2 (SIE), TCE3 (SIE), TCF2 (SIE), TCF3 (SIE), TCJ2 (SIE), TCJ3 (SIE), TCM2 (SIE), TCM3 (SIE), TCN2 (SIE), TCN3 (SIE), HQO306 (SQD), ML1997 (SQD), ML1FAS (SQD), ML1KAPT (SQD), ML1LAPS (SQD), ML1LAPT (SQD), ML1LAT (SQD), ML1MAPS (SQD), ML-LAL-S (SQD), QMB3300LA (SQD), QMB3400LA (SQD), QMBHW (SQD), QMBJW (SQD), SK4529 (SQD), SK-5666 (SQD), SK5669 (SQD)
connector-strap	1253C72G01 (EAT), 1253C72G03 (EAT), 1253C73G01 (EAT), 1253C73G03 (EAT), 1253C73G05 (EAT), 1253C73G06 (EAT), 2600D26G01 (EAT), 2600D26G02 (EAT), 314C996G01 (EAT), 314C996G02 (EAT), 314C996G03 (EAT), 4212B77G01 (EAT), 4212B78G02 (EAT), 505C606G04 (EAT), 505C606G05 (EAT), 505C606G06 (EAT), 506C052G01 (EAT), 624B609G01 (EAT), 673B142G02 (EAT), 673B142G03 (EAT), 673B142G04 (EAT), 673B142G10 (EAT), KFDP2C (FPE), KFDP3C (FPE), KFDP46C (FPE), KFDP4C (FPE), KFDP-5C (FPE), KFDP66C (FPE), KFDP7C (FPE), KFDPD16C (FPE), KFDPD26C (FPE), KFDPS16C (FPE), KFDPS26C (FPE), KFDPV7C (FPE), KQB3C (FPE), KQB46C (FPE), KQB4C (FPE), KQB66C (FPE), KQB86C (FPE), KQB-D26C (FPE), PK103T (FPE), 139C5702AQDG1 (GEA), 139C5702ASEG1 (GEA), 139C5702ASFG1 (GEA), 139C5702BQDG1 (GEA), 139C5702BSEG1 (GEA), 139C5702BSFG1 (GEA), 139C5702CQDG1 (GEA), 139C5702CSEG1 (GEA), 139C5702CSFG1 (GEA), 252B3618G10 (GEA), 252B3618G11 (GEA), 252B3618G13 (GEA), 252B3618G14 (GEA), 252B3618G15 (GEA), 315A7046P7 (GEA), 315A7046P8 (GEA), 315A7046P9 (GEA), 315A7048P20 (GEA), 315A7049P10 (GEA), TKMC1 (GEA), BNEHBSD (OTH), CS3637R (SIE), CS3638R (SIE), CS3639R (SIE), FBCD3 (SIE), FBCD4 (SIE), FBCF3 (SIE), FBCF4 (SIE), FBCJ3 (SIE), FBCJ4 (SIE), FBCL3 (SIE), LMAP1600 (SIE), P1CONACPHAL (SIE), P1CONACPHCU (SIE), P1CONBPHAL (SIE), P1CONBPHCU (SIE)
busbar	QMB303LEX (SQD)
bus-assembly	UBIZRBK12 (ZIN)

Component type	Parts (OEM PN → page)
neutral-assembly	1C96645 (EAT), 1C96646 (EAT), 1C96647 (EAT), 1C96648 (EAT), 1C96649 (EAT), 1C96650 (EAT), 1C96651 (EAT), 1C96652 (EAT), 1C96653 (EAT), 1C96654 (EAT), 1C97022 (EAT), 2A1908-1 (EAT), 2A1908-2 (EAT), 2A1908-3 (EAT), 2A1908-4 (EAT), 2A1908-5 (EAT), 2A1908-6 (EAT), 42C4050 (EAT), 42C4051 (EAT), 42C4052 (EAT), 5158C03 (EAT), 5158C03G01 (EAT), 5158C03G02 (EAT), 5158C03G03 (EAT), 5158C03G04 (EAT), 5158C04G01 (EAT), 5PN1200A (EAT), 5PN1200C (EAT), 5PN800A (EAT), 5PN800C (EAT), BINA (EAT), ANK120D (GEA), ANK800D (GEA), ANKN120 (GEA), ANKN400 (GEA), NKA (GEA), NKA42 (GEA), NKA4FT (GEA), NKR (GEA), NKR4 (GEA), NKT (GEA), NKT4 (GEA), 2NLK30A (SIE), 2NLK42A (SIE), 2NLK42B (SIE), 2NLK54A (SIE), 2NLK54B (SIE), 42NLK30A (SIE), 42NLK42A (SIE), 42NLK54A (SIE), 42NLK54B (SIE), BNK2 (SIE), BNKP2EX1 (SIE), CNLK30A (SIE), CNLK42A (SIE), CNLK42B (SIE), CNLK54A (SIE), CNLK54B (SIE), LNLK30A (SIE), LNLK42A (SIE), LNLK4X11B (SIE), LNLK54A (SIE), LNLK5X12A (SIE), LNLK6X17B (SIE), LNLK7X18A (SIE), LNLK7X20B (SIE), LPP2NB01 (SIE), HC2SN (SQD), HC4SN (SQD), HC6SN (SQD), HC6SNALCU (SQD), HC6SNCU (SQD), HC8SN (SQD), HC8SNALCU (SQD), HC8SNCU (SQD), HCP12SNALCU (SQD), HCP12SNCU (SQD), HCP4SNALCU (SQD), HCP6SNALCU (SQD), HCP8SNALCU (SQD), HCPSU8SN (SQD), HCPSU8SNALCU (SQD), HCPSU8SNCU (SQD), HCPSU8SNCW (SQD), HCR12SNALCU (SQD), HCR12SNCT (SQD), HCR12SNCTW (SQD), HCR12SNCU (SQD), HCW12SN (SQD), HCW12SNCU (SQD), HCW4SN (SQD), HCW4SNCU (SQD), HCW6SN (SQD), HCW6SNCU (SQD), HCW8SN (SQD), HCW8SNCU (SQD), HCWM12SN (SQD), ILHCJ1ESN (SQD), ILHCJ1ESNC (SQD), ILHCJ27ESN (SQD), ILHCJ2ESN (SQD), ILHCJ2ESNC (SQD), ILHCPRU1ESN (SQD), ILHCPRU1ESNC (SQD), ILHCPRU2ESN (SQD), ILHCPRU2ESNC (SQD), ILHCPSU1ESN (SQD), ILHCPSU1ESNC (SQD), ILHCPSU2ESN (SQD), ILHCPSU2ESNC (SQD), NFN1CU (SQD), NFN2CU (SQD), NFN6CR (SQD), NFN6CU (SQD), NFNL1 (SQD), NFNL2 (SQD), NFNL4 (SQD), NQN1CU (SQD), NQN2CU (SQD), NQN6CRUS (SQD), NQN6CU (SQD), NQNL1 (SQD), NQNL2 (SQD), NQNL2ACCY (SQD), NQNL4 (SQD), QM-1SN (SQD), QM-2SN (SQD), QM-4SN (SQD), QM-6SN (SQD), QMB12SN (SQD), QMB2SN (SQD), QMB4SN (SQD), QMB6SN (SQD), QMB8SN (SQD)
ground-bar	2A1907-1 (EAT), 2A1907-2 (EAT), 2C11296 (EAT), 5158C05 (EAT), 5158C05G01 (EAT), 5158C05G02 (EAT), 5158C05G05 (EAT), 5158C05G06 (EAT), 5PG1200A (EAT), 5PG1200C (EAT), 6572C746G01 (EAT), AEG10 (GEA), AEG21 (GEA), AEG21S (GEA), AEG31S (GEA), AEG47 (GEA), AEG47S (GEA), EGC12 (GEA), EGS12 (GEA), TGL2 (GEA), TGL20 (GEA), ECGK (SIE), EGK (SIE), ICGK (SIE), IGK (SIE), PEGB42 (SIE), PK12GTA (SQD), PK15GTA (SQD), PK15GTAL (SQD), PK18GTA (SQD), PK18GTAL (SQD), PK23GTA (SQD), PK23GTAL (SQD), PK27GTA (SQD), PK27GTACU (SQD), PK32DGTA (SQD), PK-9GTA (SQD)
interior	RACH24L125I (EAT), RDCH42B200I (EAT), RTBR10B100Q (EAT), RTBR12L125Q (EAT), RTBR12L125R (EAT), K-11-D-2550-01 (SIE), K-11-D-2550-02 (SIE), K-11-D-2550-03 (SIE), K-11-D-2550-04 (SIE), K-11-D-2550-05 (SIE), K-11-D-2551-01 (SIE), K-11-D-2551-02 (SIE), K-11-D-2551-03 (SIE), K-11-D-2551-04 (SIE), K-11-D-2551-05 (SIE), K-11-D-2552-01 (SIE), K-11-D-2552-02 (SIE), K-11-D-2552-03 (SIE), K-11-D-2552-04 (SIE), K-11-D-2552-05 (SIE), K-11-D-2553-01 (SIE), K-11-D-2553-02 (SIE), K-11-D-2553-03 (SIE), K-11-D-2553-04 (SIE), K-11-D-2553-05 (SIE), K-11-D-2554-01 (SIE), K-11-D-2554-02 (SIE), K-11-D-2554-03 (SIE), K-11-D-2554-04 (SIE), K-11-D-2555-01 (SIE), K-11-D-2555-02 (SIE), K-11-D-2555-03 (SIE), K-11-D-2555-04 (SIE), K-11-D-2556-01 (SIE), K-11-D-2556-02 (SIE), K-11-D-2556-03 (SIE), K-11-D-2556-04 (SIE), K-11-D-2557-01 (SIE), K-11-D-2557-02 (SIE), K-11-D-2557-03 (SIE), K-11-D-2557-04 (SIE), PE4630 (SIE), PE4840 (SIE), PF4606 (SIE), PF4809 (SIE), PQ2612 (SIE), PQ2630 (SIE), PQ2816 (SIE), PQ2840 (SIE), PQ4612 (SIE), PQ4630 (SIE), PQ4818 (SIE), PQ4840 (SIE), CF16KF63C (SQD), CF16RJ63C36 (SQD), CF20R63C (SQD), CF20RJ63C (SQD), CF25R63C (SQD), CF30RJ63C (SQD), HCP5486-8SU (SQD), NQ30L1C14GS (SQD), NQ418L1C14 (SQD), NQ430L1C14 (SQD), NQ430L2C14 (SQD), NQ442L2C14 (SQD)
mounting-bracket	208B264H01 (EAT), 208B297H01 (EAT), 315C270H01 (EAT), 624B600H01 (EAT), 624B600H02 (EAT), 8708C82G02 (EAT), 8708C82G03 (EAT), 8708C82G04 (EAT), 8708C82G05 (EAT), 8708C82G06 (EAT), 8708C82G07 (EAT), 8708C82G08 (EAT), 139C5500P81 (GEA), 139C5500P82 (GEA), 139C5500P83 (GEA), 139C5500P84 (GEA), 139C5700P86 (GEA), 208C1850P3 (GEA), 208C1850P4 (GEA), 208C1850P5 (GEA), 208C1850P6 (GEA), 252B3575P1 (GEA), 252B3576P1 (GEA), ASPAQLEBKT (GEA), FCDMP (GEA), SMP3 (GEA), SR1XBF (GEA), SR2XBF (GEA), SR5XBF (GEA), TMP1 (GEA), TMP2 (GEA), TMP3 (GEA), TMP4 (GEA), TMP5 (GEA), TMP6 (GEA), TMP7 (GEA), TQCBMPA1 (GEA), TQCBMPA10 (GEA), TQCBMPA2 (GEA), TQCBMPA3 (GEA), TQCFMP1 (GEA), TQCFMP2 (GEA), TQCFMP3 (GEA), TQCFMP4 (GEA), TQCGFBMPA1 (GEA), TQCGFBMPA10 (GEA), TQCGFBMPA2 (GEA), TQCGFBMPA3 (GEA), CDPFDZBRACKET (OTH), CQDFMB1 (SIE), CQDFMB2 (SIE), CQDFMB3 (SIE), FMPG1 (SIE), FMPG2 (SIE), FMPG3 (SIE), P1DFS250AFT (SIE), P1DFS250ANFT (SIE), P1DFS400A (SIE), 4051749901 (SQD), NFES18 (SQD), NQES18 (SQD)
mounting-rail	NF12RDE (SQD), NF18RDE (SQD), NF6RDE (SQD), NQ12RDE (SQD), NQ18RDE (SQD), NQ24RDE (SQD), NQ3RDE (SQD), NQ6RDE (SQD)
standoff	208C2022P1 (GEA)
insulator	75C140025P104 (GEA), 75C140025P105 (GEA), 75C140025P106 (GEA), 75C140032P134 (GEA), 75D165029P101T (GEA), 911E347P3 (GEA), SFCARE (GEA), 4052098601 (SQD), PKGTAB (SQD)

Component type	Parts (OEM PN → page)
barrier	1266C07G01 (EAT), 208B966G01 (EAT), 314C420G05 (EAT), 4210B95G01 (EAT), 4210B95G02 (EAT), 625B229G06 (EAT), 625B229G07 (EAT), 625B229G08 (EAT), 625B229G09 (EAT), 6631C01G01 (EAT), 6641C16G01 (EAT), 6641C16G02 (EAT), EEC3K (EAT), EEC4K (EAT), EFTS3K (EAT), EFTS4K (EAT), EIPBK (EAT), FJIPBK (EAT), FJIPBK4 (EAT), FJTS3K (EAT), FJTS4K (EAT), GTSK3 (EAT), IPB1 (EAT), IPB2 (EAT), IPB3 (EAT), IPB4 (EAT), IPB5 (EAT), LTS3K (EAT), LTS4K (EAT), NTS3K (EAT), PRLSEBBAB (EAT), PRLSEBFD (EAT), PRLSEBGHB (EAT), PRLSEBJD (EAT), PRLSEBLGKD (EAT), PRLSEBPD2 (EAT), PRLSEBPD3 (EAT), PRLSEBPD4 (EAT), PRLSEBPD5 (EAT), TEC1 (EAT), TEC2 (EAT), TS33LD (EAT), TS33LN (EAT), TS34LN (EAT), 10083041P1 (GEA), 252B1667P1 (GEA), ASP25AD65KA (GEA), FGJS3 (GEA), SKPSHLD (GEA), TEDLS (GEA), TFKLS (GEA), TJKLS (GEA), 3VL9300-8CE01 (SIE), 3VL9600-8CE01 (SIE), 3VL9800-8CE01 (SIE), BQFS2 (SIE), CLRSJL3 (SIE), IPBF4 (SIE), IPBM4 (SIE), IPBP4 (SIE), JDTERMSHIELD (SIE), MDTERMSHIELD (SIE), NDTS (SIE), SEBKP1P2P3V1 (SIE), SEBKP2V1 (SIE), SEBKP2V2 (SIE), SEBKP2V3 (SIE), SEBKP2V4 (SIE), SEBKP2V5 (SIE), SEBKP2V6 (SIE), SEBKP2V7 (SIE), SEBKP3V1 (SIE), SEBKP3V3 (SIE), SEBKRP1V1 (SIE), SEBKRP1V2 (SIE), SEBKRP1V3 (SIE), SEBKRP1V4 (SIE), SEBKRP1V5 (SIE), SEBKRP1V6 (SIE), SEBKRP1V7 (SIE), SEBP4V1 (SIE), SEBP4V2 (SIE), SEBP4V3 (SIE), SEBP5V1 (SIE), SEBP5V2 (SIE), SEBP5V3 (SIE), SEBP5V4 (SIE), SEBPPVA1 (SIE), SEBPPVA2 (SIE), TSSG3A (SIE), 36965 (SQD), GYT (SQD), ILBFMHCJHULC (SQD), ILBFMHCPHJULC (SQD), ILBFMHCPLULC (SQD), ILBFMHCPMPULC (SQD), ILBFMHCRLULC (SQD), ILBFMHCRMULC (SQD), ILBFMHCRPULC (SQD), ILBFMHCRRULC (SQD), ILCOMBLUL26W (SQD), ILCOMBLUL32W (SQD), ILCOMBLUL44W (SQD), ILCOMBMPUL26W (SQD), ILCOMBMPUL32W (SQD), ILCOMBMPUL44W (SQD), LALLC (SQD), NFBFMB20 (SQD), NFEDBS (SQD), NFHJLLC (SQD), NFLALLC (SQD), NFPPLLLC (SQD), NFPPPLLC (SQD), NQHJLSC (SQD), NQHJQLLC (SQD), NQLALHLSC (SQD), NQLALLC (SQD), NQMLLSC (SQD), NQNCC (SQD), NQODBFMB20 (SQD), NQPPLLLC (SQD), NQQLSC (SQD), PPLLC (SQD), RPINTBK1200HCPC (SQD), RPINTBK1200HCPCIP2X (SQD), RPINTBK1200HCR (SQD), RPINTBK800HCP (SQD), S32562 (SQD), S32563 (SQD), S37432 (SQD), S37436 (SQD), S37440 (SQD), S37446 (SQD), S37447 (SQD), S37448 (SQD), S37449 (SQD), S37450 (SQD)
deadfront	1C96619 (EAT), 1C96620 (EAT), 1C96638 (EAT), 2A1906-1 (EAT), 2A1906-2 (EAT), 2A1906-3 (EAT), 2A1960-1 (EAT), 2A1960-2 (EAT), 2A1960-3 (EAT), 39-3613-16 (EAT), 39-3613-27 (EAT), 4176B51 (EAT), 4176B56 (EAT), 4176B57 (EAT), 4176B60 (EAT), 4176B61 (EAT), 4176B66 (EAT), 4176B67 (EAT), 4176B68 (EAT), 4176B69 (EAT), 4176B70 (EAT), 4176B79 (EAT), 4176B80 (EAT), 4178B08 (EAT), 4179B39 (EAT), 4179B40 (EAT), 4179B41 (EAT), 4179B42 (EAT), 4180B03 (EAT), 4180B04 (EAT), 4180B05 (EAT), 4180B61 (EAT), 4180B79 (EAT), 4180B91 (EAT), 4180B93 (EAT), 42C7980 (EAT), 42C7982 (EAT), 42C8055 (EAT), 42C8072 (EAT), 42C8073 (EAT), 42C8076 (EAT), 42C8077 (EAT), 42C8078 (EAT), 42C8079 (EAT), 42C8080 (EAT), 42C8081 (EAT), 42C8082 (EAT), 5156C09 (EAT), 5156C10 (EAT), 6555C20H01 (EAT), 6555C21H01 (EAT), 6555C22H01 (EAT), 6555C23H01 (EAT), 6555C24H01 (EAT), 6555C25H01 (EAT), 6555C26H01 (EAT), 6555C27H01 (EAT), 6555C28H01 (EAT), 6559C59 (EAT), 6574C74 (EAT), 6574C74G02 (EAT), 6574C74G03 (EAT), 6574C74G04 (EAT), 6574C74G05 (EAT), 6574C74G06 (EAT), 99-3613 (EAT), 99-3613-10 (EAT), 99-3613-11 (EAT), 99-3613-13 (EAT), 99-3613-14 (EAT), 99-3613-15 (EAT), 99-3613-17 (EAT), 99-3613-18 (EAT), 99-3613-2 (EAT), 99-3613-20 (EAT), 99-3613-21 (EAT), 99-3613-22 (EAT), 99-3613-24 (EAT), 99-3613-28 (EAT), 99-3613-29 (EAT), 99-3613-3 (EAT), 99-3613-30 (EAT), 99-3613-31 (EAT), 99-3613-4 (EAT), 99-3613-5 (EAT), 99-3613-6 (EAT), 99-3613-7 (EAT), 99-3613-8 (EAT), 99-3613-9 (EAT), PW30KT1NB (EAT), PW30KT3NB (EAT), PW34KT1NB (EAT), PW34KT2NB (EAT), PW38KT1NB (EAT), PW42KT1NB (EAT), PW50KT1NB (EAT), 10083889P19 (GEA), 10083889P20 (GEA), 10083889P21 (GEA), 10083889P28 (GEA), 10083889P29 (GEA), 10083889P30 (GEA), 3100323960A001 (GEA), 31018103569A001 (GEA), DFK07 (SIE), DFK08 (SIE), DFK09 (SIE), DFK1 (SIE), DFK10 (SIE), DFK11 (SIE), DFK12 (SIE), DFK13 (SIE), DFK14 (SIE), DFK15 (SIE), DFK16 (SIE), DFK17 (SIE), DFK18 (SIE), DFK19 (SIE), DFK20 (SIE), DFK21 (SIE), NFRPLMB6PPL (SQD), NFRPLMB8PPMP (SQD), NQRPLMB2HJ (SQD), NQRPLMB6PPL (SQD)

Component type	Parts (OEM PN → page)
filler-plate	2A1918-1 (EAT), 2A1918-2 (EAT), 3456B35H01 (EAT), 3456B99H01 (EAT), 3456B99H05 (EAT), 4176B72 (EAT), 4178B06H01 (EAT), 4180B08 (EAT), 4180B52H01 (EAT), 42C8083H01 (EAT), 47-15718-2 (EAT), 47-28007 (EAT), 47-28008 (EAT), 47-28266 (EAT), 5155C62H01 (EAT), 5PFP1S (EAT), 5PFP1T (EAT), 5PFP2S (EAT), 5PFP2T (EAT), 5PFP3S (EAT), 5PFP3T (EAT), 5PFP4S (EAT), 5PFP4T (EAT), 5PFP5S (EAT), 5PFP5T (EAT), 5PFP6S (EAT), 5PFP6T (EAT), 6554C01 (EAT), 6554C01H01 (EAT), 6554C01H02 (EAT), 6554C01H03 (EAT), 6554C01H04 (EAT), 6554C01H05 (EAT), 6554C01H06 (EAT), 6554C01H07 (EAT), 6554C01H08 (EAT), 6554C01H09 (EAT), 6554C01H10 (EAT), 6554C01H11 (EAT), 6554C01H12 (EAT), 6554C01H13 (EAT), 6554C01H14 (EAT), 6554C02 (EAT), 6554C02H01 (EAT), 6554C02H02 (EAT), 6554C02H03 (EAT), 6554C02H04 (EAT), 6554C02H05 (EAT), 6554C02H06 (EAT), 6554C02H07 (EAT), 6554C02H08 (EAT), 6554C02H09 (EAT), 6554C02H10 (EAT), 6554C02H11 (EAT), 6554C02H12 (EAT), 6554C02H13 (EAT), 6554C02H14 (EAT), 6555C40H01 (EAT), 6555C41H01 (EAT), BRFP (EAT), BWFP (EAT), CH9CP (EAT), EEFBP10T2 (EAT), EEFBP6T2 (EAT), EEFPB12T2 (EAT), EEFPB1S1 (EAT), EEFPB2S1 (EAT), EEFPB2S2N (EAT), EEFPB2S2W (EAT), EEFPB2T2 (EAT), EEFPB3S2N (EAT), EEFPB3S2W (EAT), EEFPB4S1 (EAT), EEFPB4S2N (EAT), EEFPB4S2W (EAT), EEFPB4T2 (EAT), EEFPB5S1 (EAT), EEFPB5S2N (EAT), EEFPB5S2W (EAT), EEFPB6S1 (EAT), EEFPB6S2N (EAT), EEFPB6S2W (EAT), EEFPB8T2 (EAT), EEFPS1S2 (EAT), KCDP_X (EAT), KFDP_X (EAT), MP100FC-_X (EAT), MP403XBLANK (EAT), MP40FC-_X (EAT), P41X25 (EAT), PRXP4PD2FILL1 (EAT), NCFS (FPE), 10096990P1 (GEA), 139C5362P2 (GEA), 139C5503P103 (GEA), 139C5503P129 (GEA), 139C5503P64 (GEA), 139C5503P77 (GEA), 139C5503P90 (GEA), 168D1930P3 (GEA), 168D1930P4 (GEA), 208C2291P1 (GEA), 208C4262G1 (GEA), 208C4262G10 (GEA), 208C4262G11 (GEA), 208C4262G12 (GEA), 208C4262G13 (GEA), 208C4262G14 (GEA), 208C4262G15 (GEA), 208C4262G16 (GEA), 208C4262G17 (GEA), 208C4262G18 (GEA), 208C4262G19 (GEA), 208C4262G2 (GEA), 208C4262G20 (GEA), 208C4262G21 (GEA), 208C4262G22 (GEA), 208C4262G23 (GEA), 208C4262G24 (GEA), 208C4262G25 (GEA), 208C4262G26 (GEA), 208C4262G27 (GEA), 208C4262G28 (GEA), 208C4262G29 (GEA), 208C4262G3 (GEA), 208C4262G30 (GEA), 208C4262G31 (GEA), 208C4262G32 (GEA), 208C4262G33 (GEA), 208C4262G34 (GEA), 208C4262G35 (GEA), 208C4262G36 (GEA), 208C4262G49 (GEA), 208C4262G53 (GEA), 208C4262G54 (GEA), 208C4262G55 (GEA), 208C4262G56 (GEA), 208C4262G57 (GEA), 208C4262G58 (GEA), 208C4262G59 (GEA), 208C4262G6 (GEA), 208C4262G60 (GEA), 208C4262G61 (GEA), 208C4262G62 (GEA), 208C4262G7 (GEA), 252B1768G1 (GEA), 252B1768G2 (GEA), 252B2056P8 (GEA), 75C145005G703 (GEA), 75C145005G711 (GEA), 75C145005G715 (GEA), ACSFPKSG (GEA), ACSFPKSK (GEA), ACSFPKTB4 (GEA), ACTFPKEB1P (GEA), ACTFPKEB2P (GEA), ACTFPKEB3P (GEA), ACTFPKJD (GEA), ACTFPKQD2P (GEA), ACTFPKQD3P (GEA), ACTFPKSE (GEA), ACTFPKSF (GEA), ACTFPKSG (GEA), AFP10T (GEA), AFP10T44 (GEA), AFP10X (GEA), AFP19X (GEA), AFP2FBD (GEA), AFP2QDD (GEA), AFP2TED (GEA), AFP3ELD (GEA), AFP3EYD (GEA), AFP3FBD (GEA), AFP3QBD (GEA), AFP3QDD (GEA), AFP3SED (GEA), AFP3SFD (GEA), AFP3SFS (GEA), AFP3TED (GEA), AFP3TFD (GEA), AFP3TFS (GEA), AFP4FGD (GEA), AFP4FGS (GEA), AFP4SED (GEA), AFP4SFD (GEA), AFP4SFS (GEA), AFP4SGC (GEA), AFP4SGD (GEA), AFP4SGS (GEA), AFP4X (GEA), AFP5LCS (GEA), AFP5X (GEA), AFP6SKS (GEA), AFP6TJD (GEA), AFP6TJS (GEA), AFP7T (GEA), AFP7X (GEA), AFP7X2 (GEA), AFPML4X (GEA), AFPML6X (GEA), AFPML6XW (GEA), AMCB6TEDL (GEA), APP1 (GEA), APP1S (GEA), APP1W (GEA), APP2 (GEA), APP2S (GEA), APP2W (GEA), APP3 (GEA), APP3S (GEA), APP3W (GEA), APP4 (GEA), APP4S (GEA), APP4W (GEA), APP5 (GEA), APP5S (GEA), APP5W (GEA), APP6 (GEA), APP6S (GEA), APP6W (GEA), CCBBLANK (GEA), CCBFP1 (GEA), CCBFP3 (GEA), CCBFP5 (GEA), GAVFP2 (GEA), GAVFP3 (GEA), QMRFP1 (GEA), QMRFP2 (GEA), QMRFP3 (GEA), QMRFP5 (GEA), SCPFP1 (GEA), SCPFP2 (GEA), SCPFP3 (GEA), SCPFP5 (GEA), TEDFP1 (GEA), TQLFP1 (GEA), BFP1WE (OTH), BFP2WE (OTH), BFP3WE (OTH), 6FPB01 (SIE), 6FPB02 (SIE), 6FPB03 (SIE), 6FPB05 (SIE), 6FPB10 (SIE), 6FPB15 (SIE), DFFP01A (SIE), DFFP01B (SIE), DFFP01C (SIE), DFFP1 (SIE), DFFP1A (SIE), DFFP3 (SIE), DFFP6 (SIE), DFFPED01 (SIE), DFFPFD01 (SIE), DFFPJD01 (SIE), DFFPJD02 (SIE), DFFPQJ01 (SIE), DFFPQJ02 (SIE), DFFPV5363A (SIE), DFFPVA41A (SIE), DFFPVA5262A (SIE), DFFPVA5262P2A (SIE), DFFPVA5262P2B (SIE), DFFPVA5363A (SIE), DFP3AP01 (SIE), EBF1 (SIE), MBKQRC1FK (SIE), MBKQRFK (SIE), P2QRFP01 (SIE), QF3 (SIE), FP1 (SQD), HLN1BL (SQD), HLN4BL (SQD), HLN4EBL (SQD), HLW1BL (SQD), HLW-3BL (SQD), HLW4BL (SQD), HLW4EBL (SQD), HNM1BL (SQD), HNM-3BL (SQD), HNM4BL (SQD), NFFP15 (SQD), NQFP15 (SQD), QM-1BL (SQD), QM-3BL (SQD), QM-6BL (SQD), QM-9BL (SQD), QMB15BLW (SQD), QMB1BLW (SQD), QMB3BLW (SQD), QMB6BLW (SQD), QO-1CP (SQD), QOFSBF12 (SQD), QW1BL (SQD), QW3BL (SQD)

Component type	Parts (OEM PN → page)
trim	0080429 (EAT), 114C247G01 (EAT), 1A32258H03 (EAT), 1A85194G01 (EAT), 3457B16G01 (EAT), 5155C81G01 (EAT), 5155C81G03 (EAT), 5155C81G04 (EAT), 5155C81G05 (EAT), 5155C81G06 (EAT), 52-2751 (EAT), 5PD24S (EAT), 5PD24T (EAT), 5PD32S (EAT), 5PD32T (EAT), 5PD40S (EAT), 5PD40T (EAT), 5PT2430S (EAT), 5PT2448S (EAT), 5PT3230S (EAT), 5PT3248S (EAT), 5PT4030S (EAT), 5PT4048S (EAT), 8450C62H39 (EAT), E2A1667-1 (EAT), E2A1667-10 (EAT), E2A1667-11 (EAT), E2A1667-12 (EAT), E2A1667-13 (EAT), E2A1667-14 (EAT), E2A1667-15 (EAT), E2A1667-16 (EAT), E2A1667-17 (EAT), E2A1667-18 (EAT), E2A1667-19 (EAT), E2A1667-2 (EAT), E2A1667-20 (EAT), E2A1667-21 (EAT), E2A1667-22 (EAT), E2A1667-23 (EAT), E2A1667-24 (EAT), E2A1667-3 (EAT), E2A1667-4 (EAT), E2A1667-5 (EAT), E2A1667-6 (EAT), E2A1667-7 (EAT), E2A1667-8 (EAT), E2A1667-9 (EAT), EZT2024F (EAT), EZT2024S (EAT), EZT2030F (EAT), EZT2030S (EAT), EZT2036F (EAT), EZT2036S (EAT), EZT2042F (EAT), EZT2042S (EAT), EZT2048F (EAT), EZT2048S (EAT), EZT2054F (EAT), EZT2054S (EAT), EZT2060F (EAT), EZT2060S (EAT), EZT2072F (EAT), EZT2072S (EAT), EZT2090F (EAT), EZT2090S (EAT), EZTV2024F (EAT), EZTV2024S (EAT), EZTV2030F (EAT), EZTV2030S (EAT), EZTV2036F (EAT), EZTV2036S (EAT), EZTV2042F (EAT), EZTV2042S (EAT), EZTV2048F (EAT), EZTV2048S (EAT), EZTV2054F (EAT), EZTV2054S (EAT), EZTV2060F (EAT), EZTV2060S (EAT), EZTV2072F (EAT), EZTV2072S (EAT), EZTV2090F (EAT), EZTV2090S (EAT), K80133 (EAT), K80429 (EAT), K80522 (EAT), LDD2457FTW (EAT), LDD2457STW (EAT), LDD2473FTW (EAT), LDD2473STW (EAT), LDD2490FTW (EAT), LDD2490STW (EAT), LDD3673FTW (EAT), LDD3673STW (EAT), LDD3690FTW (EAT), LDD3690STW (EAT), LDD4473FTW (EAT), LDD4473STW (EAT), LDD4490FTW (EAT), LDD4490STW (EAT), LT2036S (EAT), LT2042S (EAT), LT2048S (EAT), LT2060S (EAT), LT2072S (EAT), LT2090S (EAT), LTC969S (EAT), LTC969SB (EAT), LTC978S (EAT), LTC978SB (EAT), LTC981S (EAT), LTC981SB (EAT), LTC990S (EAT), LTC990SB (EAT), LTCD969S (EAT), LTCD969SB (EAT), LTCD978S (EAT), LTCD978SB (EAT), LTCD981S (EAT), LTCD981SB (EAT), LTCD990S (EAT), LTCD990SB (EAT), LWPT2024 (EAT), LWPT2036 (EAT), LWPT2048 (EAT), LWPT2060 (EAT), LWPT2072 (EAT), LWPT2090 (EAT), RDCHFRAME (EAT), ACF3149S (GEA), ACF3153S (GEA), ACF3157S (GEA), ACF3161S (GEA), ACF3165S (GEA), ACF3170S (GEA), ACF3174S (GEA), ACF3178S (GEA), ACF3182S (GEA), ACF3186S (GEA), ACF4049S (GEA), ACF4053S (GEA), ACF4057S (GEA), ACF4061S (GEA), ACF4065S (GEA), ACF4070S (GEA), ACF4074S (GEA), ACF4078S (GEA), ACF4082S (GEA), ACF4086S (GEA), CBA3121F (GEA), CBA3121S (GEA), CBA3124F (GEA), CBA3124S (GEA), CBA3127F (GEA), CBA3127S (GEA), CBA3130F (GEA), CBA3130S (GEA), CBA3136F (GEA), CBA3136S (GEA), CBA3148F (GEA), CBA3148S (GEA), CBA3542F (GEA), CBA3542S (GEA), CBA4027F (GEA), CBA4027S (GEA), CBA4030F (GEA), CBA4030S (GEA), CBA4036F (GEA), CBA4036S (GEA), CBA4039F (GEA), CBA4039S (GEA), CBA4042F (GEA), CBA4042S (GEA), CBA4045F (GEA), CBA4045S (GEA), BxxCVR (SIE), HC-2636-CF (SQD), HC-2645-CF (SQD), HC-2654-CF (SQD), HC-2663-CF (SQD), HC-2672-CF (SQD), HC2686T (SQD), HC-2690-CF (SQD), HC-3238-TF (SQD), HC-3247-TF (SQD), HC-3256-TF (SQD), HC-3274-TF (SQD), HC-3292-TF (SQD), HC-4144-TS (SQD), HC-4153-TS (SQD), HC-4162-TS (SQD), HC-4180-TS (SQD), HCM48T (SQD), HCM73T (SQD), HCM91T (SQD), HCR86T (SQD), HCS-4144-TF (SQD), HCS-4153-TF (SQD), HCS-4162-TF (SQD), HCS-4180-TF (SQD), HCW50D (SQD), HCW50T (SQD), HCW59T (SQD), HCW68T (SQD), HCW86D (SQD), HCW86T (SQD), LX-26TF (SQD), LX-32TF (SQD), LX-40TF (SQD), LX40TS (SQD), LX-45TF (SQD), LX45TS (SQD), LX-49TF (SQD), LX58TS (SQD), LX62TS (SQD), MDC-38TF (SQD), MDC-41TF (SQD), MDC-50TF (SQD), MDC-53TF (SQD), MHC23 (SQD), MHC26 (SQD), MHC29 (SQD), MHC32 (SQD), MHC35 (SQD), MHC38 (SQD), MHC41 (SQD), MHC44 (SQD), MHC50 (SQD), MHC50V (SQD), MHC53V (SQD), MHC56 (SQD), MHC56V (SQD), MHC59V (SQD), MHC62V (SQD), MHC65V (SQD), MHC68V (SQD), MHC74V (SQD), MHC77V (SQD), MSC-23TF (SQD), MSC-26TF (SQD), MSC-29TF (SQD), MSC-35TF (SQD), MSC-38TF (SQD), MSC-44TF (SQD), NC26 (SQD), NC32 (SQD), NC38 (SQD), NC44 (SQD), NC50 (SQD), NC50V (SQD), NC56V (SQD), NC59TS (SQD), NC62V (SQD), NC62VS3PNF (SQD), NC65TS (SQD), NC68V (SQD), NC68VS3PNF (SQD), NC71TS (SQD), NC74V (SQD), NC74VS3PNF (SQD), NC80V (SQD), NC80VS3PNF (SQD), NC85TS (SQD), NC86V (SQD), NC86VS3PNF (SQD), NC92VS3PNF (SQD), NQC20 (SQD), NQC-20TF (SQD), NQC23 (SQD), NQC-24TF (SQD), NQC26 (SQD), NQC-28TF (SQD), NQC29 (SQD), NQC32 (SQD), NQC-32TF (SQD), NQC35 (SQD), NQC-37TF (SQD), NQC38 (SQD), NQC41 (SQD), NQC-42TF (SQD), NQC44 (SQD), NQC-48TF (SQD), NQC50 (SQD), NQC56 (SQD), QM-3132-TS (SQD), QM-3144-TS (SQD), QM-3156-TS (SQD), QM-3168-TS (SQD), QM-3180-TS (SQD), QM-3192-TS (SQD), QM38756TS (SQD), QM389012TS (SQD), QM38902TS (SQD), QM38906TS (SQD), QM38908TS (SQD)

Component type	Parts (OEM PN → page)
box/enclosure	2A1690-1XX (EAT), 2A1690-2XX (EAT), 2A1690-3XX (EAT), 2A1690-4XX (EAT), 2A1916-1 (EAT), 2A1916-2 (EAT), 5PB2430G (EAT), 5PB2448G (EAT), 5PB3230G (EAT), 5PB3248G (EAT), 5PB4030G (EAT), 5PB4048G (EAT), BX2457 (EAT), BX2473 (EAT), BX2490 (EAT), BX3673 (EAT), BX3690 (EAT), BX4473 (EAT), BX4490 (EAT), DPC2457 (EAT), DPC2473 (EAT), DPC2490 (EAT), DPC3673 (EAT), DPC3690 (EAT), E2A1649-1 (EAT), E2A1649-2 (EAT), E2A1649-3 (EAT), E2A1649-4 (EAT), EZB2024R (EAT), EZB2030R (EAT), EZB2036R (EAT), EZB2042R (EAT), EZB2048R (EAT), EZB2054R (EAT), EZB2060R (EAT), EZB2072R (EAT), EZB2090R (EAT), EZBP2024R (EAT), EZBP2030R (EAT), EZBP2036R (EAT), EZBP2042R (EAT), EZBP2048R (EAT), EZBP2054R (EAT), EZBP2060R (EAT), EZBP2072R (EAT), EZBP2090R (EAT), RPCB2457 (EAT), RPCB2473 (EAT), RPCB2490 (EAT), RPCB3673 (EAT), RPCB3690 (EAT), VWPB2024 (EAT), VWPB2036 (EAT), VWPB2048 (EAT), VWPB2060 (EAT), VWPB2072 (EAT), VWPB2090 (EAT), YS2036 (EAT), YS2042 (EAT), YS2048 (EAT), YS2060 (EAT), YS2072 (EAT), YS2090 (EAT), YSC969 (EAT), YSC978 (EAT), YSC981 (EAT), YSC990 (EAT), ACB311149 (GEA), ACB311153 (GEA), ACB311157 (GEA), ACB311161 (GEA), ACB311165 (GEA), ACB311170 (GEA), ACB311174 (GEA), ACB311178 (GEA), ACB311182 (GEA), ACB311186 (GEA), ACB401149 (GEA), ACB401153 (GEA), ACB401157 (GEA), ACB401161 (GEA), ACB401165 (GEA), ACB401170 (GEA), ACB401174 (GEA), ACB401178 (GEA), ACB401182 (GEA), ACB401186 (GEA), DACB3539 (GEA), DACB3545 (GEA), DACB4027 (GEA), DACB4030 (GEA), DACB4033 (GEA), DACB4036 (GEA), DACB4039 (GEA), DACB4042 (GEA), DACB4045 (GEA), DACB4048 (GEA), DASW3121 (GEA), DASW3127 (GEA), DASW3130 (GEA), DASW3133 (GEA), DASW3136 (GEA), DASW3142 (GEA), 24WD56 (SIE), 24WD62 (SIE), 24WD68 (SIE), 24WD74 (SIE), 24WD80 (SIE), B74FLR (SIE), EWK1 (SIE), EWK1B (SIE), EWK2 (SIE), EWK2B (SIE), EWK3 (SIE), PLW10 (SIE), PUG14 (SIE), PUG26 (SIE), WPUG14 (SIE), WPUG26 (SIE), 8011010401 (SQD), 8011010501 (SQD), HC2609DEXF (SQD), HC-2609-EXF (SQD), HC-2636-B (SQD), HC-2645-B (SQD), HC-2654-B (SQD), HC-2663-B (SQD), HC-2672-B (SQD), HC2686DB (SQD), HC2686WP (SQD), HC-2690-B (SQD), HC2886WP (SQD), HC-3209-EXF (SQD), HC-3238-B (SQD), HC-3247-B (SQD), HC3248DB9 (SQD), HC-3256-B (SQD), HC3273DB9 (SQD), HC-3274-B (SQD), HC3291DB9 (SQD), HC-3292-B (SQD), HC-4112-DEXF (SQD), HC-4112-EXF (SQD), HC-4144-B (SQD), HC-4144-DB (SQD), HC-4153-B (SQD), HC-4153-DB (SQD), HC-4162-B (SQD), HC-4162-DB (SQD), HC-4180-B (SQD), HC-4180-DB (SQD), HC4212DEXF (SQD), HC4250DB (SQD), HC4250WP (SQD), HC4259DB (SQD), HC4259WP (SQD), HC4268DB (SQD), HC4268WP (SQD), HC4286DB (SQD), HC4286WP (SQD), HC4406DEXF (SQD), HC4412DEXF (SQD), HC4486DB (SQD), HC4486WP (SQD), HCJ3248WP (SQD), HCJ3273WP (SQD), HCJ3291WP (SQD), HCT2DH26D9 (SQD), HCT2DH32D9 (SQD), HCT2DH42 (SQD), HCT2DH42D12 (SQD), HCT2DH44 (SQD), HCT2DH44D12 (SQD), HCT2DH47 (SQD), HCT2DH49 (SQD), HCT2DH56 (SQD), HCT2DH58 (SQD), MH23 (SQD), MH23WP (SQD), MH26 (SQD), MH26WP (SQD), MH29 (SQD), MH29WP (SQD), MH32 (SQD), MH32WP (SQD), MH35 (SQD), MH35WP (SQD), MH38 (SQD), MH38WP (SQD), MH41 (SQD), MH41WP (SQD), MH44 (SQD), MH44WP (SQD), MH50 (SQD), MH50WP (SQD), MH53 (SQD), MH53WP (SQD), MH56 (SQD), MH56WP (SQD), MH59 (SQD), MH59WP (SQD), MH62 (SQD), MH62D9 (SQD), MH62D9VWP (SQD), MH62WP (SQD), MH65 (SQD), MH656WP (SQD), MH65WP (SQD), MH68 (SQD), MH686WP (SQD), MH68D9 (SQD), MH68D9VWP (SQD), MH68WP (SQD), MH716WP (SQD), MH74 (SQD), MH746WP (SQD), MH74D9 (SQD), MH74D9VWP (SQD), MH74WP (SQD), MH77 (SQD), MH77WP (SQD), MH80 (SQD), MH80D9 (SQD), MH80D9VWP (SQD), MH80WP (SQD), MH86 (SQD), MH86D9 (SQD), MH86D9VWP (SQD), MH86WP (SQD), MH92 (SQD), MH92D9 (SQD), MH92D9VWP (SQD), MHBE20 (SQD), MHBE26 (SQD), MHCO20 (SQD), MHCOEW20A (SQD), MHCOEW20F (SQD), MHKE20 (SQD), MHT2DH20 (SQD), MPX81542 (SQD), MTX836 (SQD), MTX848 (SQD), MTX856 (SQD), MTX866 (SQD), NQB520 (SQD), NQB523 (SQD), NQB526 (SQD), NQB529 (SQD), NQB532 (SQD), NQB535 (SQD), NQB538 (SQD), NQB541 (SQD), NQB544 (SQD), NQB550 (SQD), NQB556 (SQD), NTX836 (SQD), NTX848 (SQD), NTX856 (SQD), NTX866 (SQD), QM-3132-B (SQD), QM-3144-B (SQD), QM-3156-B (SQD), QM-3168-B (SQD), QM-3180-B (SQD), QM-3192-B (SQD), QM3875B (SQD), QM3890B (SQD)
hardware-kit	1A85195H01 (EAT), 2A1917-2 (EAT), 2C11641G02 (EAT), 414A380G02 (EAT), 4180B62 (EAT), 5078A98 (EAT), 7494A11G02 (EAT), 99-1016 (EAT), 99-970 (EAT), E2A1917-1 (EAT), KCDPFB100-H (EAT), MP40KF100-3H (EAT), 10085396G1 (GEA), 139C5700G11 (GEA), 139C5700G6 (GEA), 139C5720G3 (GEA), 139C5720G6 (GEA), 139C5720G9 (GEA), 343L564G1 (GEA), 343L564G2 (GEA), 343L564G3 (GEA), 343L564G4 (GEA), 343L564G7 (GEA), 359L481G1 (GEA), ACHK (GEA), ACSHKSG (GEA), ACSHKSK (GEA), ACSHKTB4 (GEA), ACTHKEB1P (GEA), ACTHKEB2P (GEA), ACTHKEB3P (GEA), ACTHKJD (GEA), ACTHKQD2P (GEA), ACTHKQD3P (GEA), ACTHKSE (GEA), ACTHKSF (GEA), ACTHKSG (GEA), AHKBE1 (GEA), AHKBF1 (GEA), AHKBFB1 (GEA), AHKBFD1 (GEA), AHKBFG1 (GEA), AHKBG1 (GEA), AHKBQ1 (GEA), AHKE1 (GEA), AHKEL1 (GEA), AHKF1 (GEA), AHKFD1 (GEA), AHKFG1 (GEA), AHKG1 (GEA), AHKJ1 (GEA), AHKLB1 (GEA), AHKQ1 (GEA), ASPFLUSHADJ (GEA), ASPQTRK (GEA), ASPQTRT (GEA), ASPSERENT (GEA), BNDKT (GEA), BNDKT6 (GEA), FCMSK3 (GEA), FCMSK4 (GEA), FEMSK2 (GEA), FEMSK3 (GEA), FEMSK4 (GEA), FGMSK1 (GEA), FGMSK2 (GEA), NEMATRX (GEA), SEMSK1 (GEA), SEMSK2 (GEA), SEMSK3 (GEA), SEMSK4 (GEA), SFGMSK1 (GEA), SFGMSK2 (GEA), SFMSK1 (GEA), SFMSK2 (GEA), SGMSKMOM (GEA), SKMSK1 (GEA), SKMSK2 (GEA), BBKVA5262P2HW (SIE), BBKVA52P3HW (SIE), BBKVR52P3HW (SIE), BK1 (SIE), BK1A (SIE), BR2 (SIE), BR3 (SIE), BR4 (SIE), ECMBR1 (SIE), ECMBR2 (SIE), FP9508 (SIE), FP9555 (SIE), FP9556 (SIE), IMK1 (SIE), MBKBFA (SIE), P2BK1 (SIE), P2BK2 (SIE), P2BK3 (SIE), P3BK1 (SIE), S3VA52PR (SIE), S3VA53PR (SIE), SMB6R (SIE), TCH65K (SIE), TNKG3 (SIE), 4028343250 (SQD), 4028343550 (SQD), 4028343750 (SQD), 8000602003 (SQD), 8023317701 (SQD), NFCRBOND8 (SQD), NFNQCRBOND46 (SQD), PJC-7201 (SQD), PK1TC (SQD), PK2MB (SQD), PK3MB (SQD), PK3TC (SQD), PK4MB2HA (SQD), PK4MB2LA (SQD), PK5RK (SQD), QO1SE (SQD), QO2DTIM (SQD), QOBRT (SQD), S37444 (SQD), S37445 (SQD), TBPANEL (SQD), TIKFD (SQD)

Component type	Parts (OEM PN → page)
fastener	1A84774H01 (EAT), 414A380G01 (EAT), 4218B80G01 (EAT), 42C1129H02 (EAT), 5081A08G02 (EAT), 5081A09G02 (EAT), 5157C83G06 (EAT), 624B375G01 (EAT), 624B375G02 (EAT), 624B375G23 (EAT), 70010DCBCH (EAT), 70010RBB8G (EAT), 70010RBBB8P (EAT), 70030KBDBR (EAT), 70032SBB8D (EAT), 70210AL616 (EAT), 7499A48G04 (EAT), 8703C80G05 (EAT), 8712C73H01 (EAT), BMH1 (EAT), BMH2 (EAT), BMH3 (EAT), BMH4 (EAT), BMH5 (EAT), KPR1A (EAT), KPR1AM (EAT), KPR3A (EAT), KPR3AM (EAT), KPR3B (EAT), KPR3BM (EAT), PLN2 (EAT), PLN2M (EAT), QLBHTSE (EAT), QLLDTSA (EAT), QLLDTSB (EAT), QLLDTSC (EAT), QLLNTSFG (EAT), 192A6976P189 (GEA), 252B3613P1 (GEA), 254V644P1 (GEA), 331A3329P2 (GEA), 343L162G1 (GEA), 343L162G11 (GEA), 343L162G20 (GEA), 343L162G22 (GEA), 343L162G23 (GEA), 343L162G24 (GEA), 343L162G25 (GEA), 343L162G7 (GEA), 343L184G18 (GEA), 75A105503P101 (GEA), 75A105503P105 (GEA), 75C140485P103 (GEA), FCNP3 (GEA), FCNPB (GEA), FEMSK1 (GEA), N22P23012B6 (GEA), N22P23016B6 (GEA), N245P21B6 (GEA), N37P21060B6 (GEA), N37P21969B6 (GEA), N402P11B6 (GEA), N657P21024B6 (GEA), N722EP16006B6 (GEA), N730BP1308B6 (GEA), RGRPDPIN (GEA), RGRPTSCR (GEA), THQCFMK (GEA), TQBS1 (GEA), TQBSI (GEA), 3VA9233-0QA00 (SIE), 3VA9243-0QA00 (SIE), 3VA9473-0QA00 (SIE), CQDSMK (SIE), LP3RHP01 (SIE), LPJSPDNUT01 (SIE), LPTS01 (SIE), MB120 (SIE), MSE6-100 (SIE), MSF6-50 (SIE), MSJ6 (SIE), MSKG4 (SIE), MSKM4 (SIE), MSQR3 (SIE), P1SCRWS (SIE), 2142720241 (SQD), 21427-20401 (SQD), 2150720200 (SQD), 2152620361 (SQD), 21590-20241 (SQD), 21593-20100 (SQD), 2271020200 (SQD), 2300100200 (SQD), 2322000003 (SQD), 2330241601 (SQD), 2342702001 (SQD), 2342702400 (SQD), 2370100200 (SQD), 4020506501 (SQD), 739137 (SQD), 8000602001 (SQD), 8011417101 (SQD), LP9502 (SQD), LP9503 (SQD), PKDFSCREW (SQD), S36967 (SQD)
conversion-kit	5PCGBLD600S (EAT), 5PCGBLUG1200T (EAT), 5PCGBLUG400S (EAT), 5PCGBLUG600S (EAT), 5PCGBLUG800S (EAT), 5PCGBMD800T (EAT), 5PCGBND1200T (EAT), EELD36600SB2 (EAT), KCDPDK (EAT), KCDPEHD (EAT), KCDPFD (EAT), KCDPFDB (EAT), KCDPHKD (EAT), KCDPJD (EAT), KCDPJDB (EAT), KCDPKD (EAT), KCDPKDB (EAT), KCDPLD (EAT), KCDPMDL (EAT), KCDPND (EAT), KFDPBS324R (EAT), KFDPBS364R (EAT), KFDPW325R (EAT), KFDPW326R (EAT), KFDPW365R (EAT), KFDPW366R (EAT), KFDPW367 (EAT), KFDPW368 (EAT), KFDPWT3211R (EAT), KFDPWT3222R (EAT), KFDPWT3233R (EAT), KFDPWT3611R (EAT), KFDPWT3622R (EAT), KFDPWT3633R (EAT), KMP40KD3400 (EAT), KPHFDB3100T (EAT), KPH-LFDB3100T (EAT), RAABR10BXXX (EAT), RAABR10BXXXA (EAT), RAABR12L125 (EAT), RAABR12L125A (EAT), RABR12B3XXX (EAT), RABR12H3XXX (EAT), RABR12L3125 (EAT), RABR20BXXX (EAT), RABR20HXXX (EAT), RABR20L125 (EAT), RACH18B3XXX (EAT), RACH22BXXX (EAT), RACH24L125 (EAT), RACH24L3125 (EAT), RACH30L3125 (EAT), RACH30L3225 (EAT), RBBR20BXXX (EAT), RBBR24L3150 (EAT), RBBR30BCXXX (EAT), RBBR30BXXX (EAT), RBBR30H3XXX (EAT), RBBR30HCXXX (EAT), RBBR30L200 (EAT), RBBR30L3100 (EAT), RBCH24BXXX (EAT), RBCH24D225 (EAT), RBCH24D3225 (EAT), RBCH30BXXX (EAT), RBCH30D3225 (EAT), RBCH30L3225 (EAT), RBCH32D225 (EAT), RBCH32L225 (EAT), RBCH42L125 (EAT), RBCH42L225 (EAT), RBCH42L3125 (EAT), RBCH42L3225 (EAT), RCBR30BXXX (EAT), RCBR30L3200 (EAT), RCBR40L200 (EAT), RCCH30D3225 (EAT), RCCH32BXXX (EAT), RCCH32D225 (EAT), RCCH42L225 (EAT), RCCH42L3225 (EAT), RDBR30B3XXX (EAT), RDBR30H3XXX (EAT), RDBR40BXXX (EAT), RDBR42L225 (EAT), RDBR42L3225 (EAT), RDCH42B3XXX (EAT), RDCH42BXXX (EAT), RDCH42D225 (EAT), RDCH42D3225 (EAT), RDCH42H3XXX (EAT), RDCH42HXXX (EAT), RDCH42L225 (EAT), RDCH42L3225 (EAT), REBR42B3XXX (EAT), REBR42H3XXX (EAT), REBR42L3225 (EAT), TAD3 (EAT), APHBL (GEA), APHBQ (GEA), ASP2PTFJ3P (GEA), ASP2PTQD3P (GEA), SRFB3XT4FPK (GEA), SRFB3XT4FPX (GEA), SRFB3XT5MFPK (GEA), SRFB3XT5MFPX (GEA), SRFB3XT7MFPK (GEA), SRFB3XT7MFPX (GEA), SRFB6XT1FPK (GEA), SRFB6XT1FPX (GEA), SRFB6XT4FPK (GEA), SRFB6XT4FPX (GEA), SRFB6XT5BFPK (GEA), SRFB6XT5BFPX (GEA), BSK4515 (OTH), BSK4516 (OTH), BSK4517 (OTH), BSK4578 (OTH), 11-5570-01 (SIE), 11-5570-02 (SIE), BBKQRP1FK (SIE), BBKQRP2FK (SIE), MBKVA5363JD (SIE), P53RCONVKIT (SIE), QMB-103-AL (SQD), QMB-106-AL (SQD), QMB306EX (SQD), QMB306LEX (SQD), QMB310EX (SQD), QMB310LEX (SQD), QMB320EX (SQD), QMB600T6 (SQD), QMB-63-AL (SQD), QMB800T6 (SQD), SK4515 (SQD), SK4516 (SQD), SK4517 (SQD), SK4578 (SQD)
spd-kit	PDSPD2403SA2A-K3 (EAT), PDSPD2403SA2A-K4 (EAT), PDSPD4803SA2A-K3 (EAT), PDSPD4803SA2A-K4 (EAT), SPD050208Y2A (EAT), SPD050230L2A (EAT), SPD100208Y2A (EAT), SPD100480Y2A (EAT), SPD120230L3A (EAT), SPD120480Y2C (EAT), SPD160480Y3A (EAT), SPD200480Y3A (EAT), SPDkkkVVVVfA (EAT), ATHMEGNDN (GEA), TPS3 09 (SIE), QMB1IMA_ (SQD), QMB2IMA_ (SQD), QMB3IMA_ (SQD), QMB4IMA_ (SQD), QMB8IMA_ (SQD), SSP01SBA08D (SQD), SSP01SBA10D (SQD), SSP01SBA12D (SQD), SSP01SBA16D (SQD), SSP01SBA20D (SQD), SSP01SBA24D (SQD), SSP02SBA08D (SQD), SSP02SBA10D (SQD), SSP02SBA12D (SQD), SSP02SBA16D (SQD), SSP02SBA20D (SQD), SSP02SBA24D (SQD), SSP03SBA24D (SQD), TVS12RMU (SQD)
meter-kit	MSK2001 (SIE), MSK2003 (SIE), SMMBQMK (SIE), SMMCEMK (SIE), SMMEDMK (SIE), SMMFDMK (SIE), SMMHEMK (SIE), SMMNGMK (SIE), SMMQJMK (SIE), SMMTFMK (SIE)

Component type	Parts (OEM PN → page)
switch-unit	FDPBS324R (EAT), FDPBS364R (EAT), FDPBT3244R (EAT), FDPBT3644R (EAT), FDPW325R (EAT), FDPW326R (EAT), FDPW327 (EAT), FDPW328 (EAT), FDPW365R (EAT), FDPW366R (EAT), FDPW367 (EAT), FDPW368 (EAT), FDPWT3211R (EAT), FDPWT3222R (EAT), FDPWT3233R (EAT), FDPWT3611R (EAT), FDPWT3622R (EAT), FDPWT3633R (EAT), M50ASB324R (EAT), M50ASB364R (EAT), M50ASW325R (EAT), M50ASW326R (EAT), M50ASW365R (EAT), M50ASW366R (EAT), M50ASW367B (EAT), M50ASW367T (EAT), M50ASW368B (EAT), M50ASW368T (EAT), M50ATW3211R (EAT), M50ATW3222R (EAT), M50ATW3233R (EAT), M50ATW3611R (EAT), M50ATW3622R (EAT), M50ATW3633R (EAT), THFP221X (GEA), THFP221XL (GEA), THFP222X (GEA), THFP222XL (GEA), THFP223 (GEA), THFP223L (GEA), THFP223X (GEA), THFP223XL (GEA), THFP224 (GEA), THFP225 (GEA), THFP226 (GEA), THFP261 (GEA), THFP261L (GEA), THFP262 (GEA), THFP262L (GEA), THFP263 (GEA), THFP263L (GEA), THFP321 (GEA), THFP321L (GEA), THFP321X (GEA), THFP321XL (GEA), THFP322 (GEA), THFP323 (GEA), THFP324 (GEA), THFP325 (GEA), THFP326 (GEA), THFP361 (GEA), THFP361L (GEA), THFP362 (GEA), THFP362L (GEA), THFP363 (GEA), THFP363L (GEA), THFP364 (GEA), THFP365 (GEA), THFP366 (GEA), THFP367 (GEA), THFP368 (GEA), F6150D (SIE), F6162D (SIE), F672 (SIE), F672D (SIE), VB6150 (SIE), VB657 (SIE), VB671 (SIE), QMB221HW (SQD), QMB221TW (SQD), QMB222HW (SQD), QMB222TW (SQD), QMB223HW (SQD), QMB223TW (SQD), QMB224W (SQD), QMB225W (SQD), QMB225WT3 (SQD), QMB261HW (SQD), QMB261TW (SQD), QMB262HW (SQD), QMB262TW (SQD), QMB263HW (SQD), QMB263TW (SQD), QMB264W (SQD), QMB3203T (SQD), QMB3210M (SQD), QMB321HW (SQD), QMB321TW (SQD), QMB3220 (SQD), QMB3220M (SQD), QMB322HW (SQD), QMB322TW (SQD), QMB323HW (SQD), QMB323MW (SQD), QMB323TW (SQD), QMB324M (SQD), QMB324MW (SQD), QMB324W (SQD), QMB325MW (SQD), QMB325W (SQD), QMB325WT3 (SQD), QMB326MW (SQD), QMB326W (SQD), QMB326WT3 (SQD), QMB327WT3 (SQD), QMB3603T (SQD), QMB3610M (SQD), QMB3610MJ (SQD), QMB3610T (SQD), QMB361HW (SQD), QMB361TW (SQD), QMB3620M (SQD), QMB3620MJ (SQD), QMB362HW (SQD), QMB362T21W (SQD), QMB362TW (SQD), QMB363HW (SQD), QMB363MW (SQD), QMB363T31W (SQD), QMB363T32W (SQD), QMB363TW (SQD), QMB364M (SQD), QMB364MW (SQD), QMB364W (SQD), QMB365MW (SQD), QMB365W (SQD), QMB365WT6 (SQD), QMB366MW (SQD), QMB366W (SQD), QMB367MW (SQD), QMB367W (SQD), QMB368W (SQD), QMJ361T (SQD), QMJ362T (SQD), QMJ363H (SQD), QMJ363T (SQD), QMJ364H (SQD), QMJ364T (SQD), QMJ365 (SQD), QMJ366 (SQD)
fuse-kit	SSRK35 (SIE), SSRK36 (SIE), TFAK52 (SIE), TFAK55 (SIE), TFAK62 (SIE), TFAK65 (SIE), W49813 (SIE), W49814 (SIE), W49815 (SIE), W49816 (SIE), QMB400J (SQD), QMB400T6 (SQD), QMB600J (SQD)
breaker-accessory	314C960G01 (EAT), 314C960G04 (EAT), 314C960G05 (EAT), 314C960G06 (EAT), 314C960G07 (EAT), 314C960G08 (EAT), 314C960G09 (EAT), 314C960G10 (EAT), 314C960G11 (EAT), 314C960G12 (EAT), 373B375G03 (EAT), 373B375G04 (EAT), 374D883G01 (EAT), 374D883G02 (EAT), 451D874G01 (EAT), 451D874G02 (EAT), 5010D23G01 (EAT), 5010D23G02 (EAT), 5652B38G01 (EAT), 623B222G01 (EAT), 623B222G02 (EAT), 623B222G03 (EAT), 6642C14G02 (EAT), 6642C14G03 (EAT), 6642C14G04 (EAT), 6642C14G05 (EAT), 6642C14G06 (EAT), 6642C14G07 (EAT), A1X1LTK (EAT), A1X1PK (EAT), A1X1RPKFDE (EAT), A1X1RTK (EAT), A2X1LPK (EAT), A2X1RPK (EAT), B2016RD (EAT), B2016RDL (EAT), B2500RD (EAT), E1X1PK (EAT), EF2RTDK (EAT), EF2RTWK (EAT), EF3RTDK (EAT), EF3RTWK (EAT), EF4RTDK (EAT), EF4RTWK (EAT), FCWTK (EAT), FCWTK225 (EAT), FJ3RTDK (EAT), FJ3RTWK (EAT), FJ4RTDK (EAT), FJ4RTWK (EAT), FJCWTK (EAT), KCWTK (EAT), KPEK1 (EAT), KPEK12 (EAT), KPEK14 (EAT), KPEK2 (EAT), KPEK24 (EAT), KPEK3 (EAT), KPEK34 (EAT), KPEK4 (EAT), KPEK44 (EAT), KPEKM1 (EAT), KPEKM12 (EAT), KPEKM14 (EAT), KPEKM2 (EAT), KPEKM24 (EAT), KPEKM3 (EAT), KPEKM34 (EAT), KPEKM4 (EAT), KPEKM44 (EAT), L3RTWK (EAT), L4RTWK (EAT), LGTES3 (EAT), LGTES4 (EAT), LGTEW3 (EAT), LGTEW4 (EAT), SNT1LP03K (EAT), SNT1LP08K (EAT), SNT1LP12K (EAT), SNT1LP18K (EAT), SNT1RP03K (EAT), SNT1RP08K (EAT), SNT1RP12K (EAT), SNT1RP18K (EAT), UVH1LP08K (EAT), UVH1LP11K (EAT), UVH1LP15K (EAT), UVH1LP21K (EAT), UVH1RP08K (EAT), UVH1RP11K (EAT), RP211002 (FPE), RP212001 (FPE), 286A8066G1 (GEA), 455C592P1 (GEA), 455C592P2 (GEA), 789A448G1 (GEA), 789A448G2 (GEA), 789A448G3 (GEA), FABAM01W (GEA), FABAM10W (GEA), FAS01LW (GEA), FAS01RW (GEA), FAS10LW (GEA), FAS10RW (GEA), FASHT7W (GEA), FASHTBW (GEA), FASHTDW (GEA), FASHTFW (GEA), FASHTJW (GEA), FASHTKW (GEA), FASHTNW (GEA), FASHTUW (GEA), FAUVR7W (GEA), FAUVRDW (GEA), FAUVRFW (GEA), FAUVRJW (GEA), FAUVRNW (GEA), FAUVRUW (GEA), FCDSD (GEA), FCDSDB (GEA), FCDSDP (GEA), FGH1LCK (GEA), FGJN3 (GEA), HT-100 (GEA), SE3LCK (GEA), SE3LCKL (GEA), SF3LCK (GEA), SG1BCK (GEA), SG1LCK (GEA), SGBCS1 (GEA), SGBCS2 (GEA), SGLVK (GEA), SK1LCK (GEA), SKHDLEXT (GEA), SKLVK (GEA), SRFN100GF (GEA), SRFN120GF (GEA), SRFN400GF (GEA), SRFN600GF (GEA), SRFN800GF (GEA), TEF1 (GEA), TEF2 (GEA), TEF3 (GEA), TEF4 (GEA), TFK1 (GEA), TFK2 (GEA), TJLVK (GEA), TKM11 (GEA), TKM12 (GEA), TQDFM1 (GEA), A01QR2 (SIE), A02QR2 (SIE), CQDA1 (SIE), CQDA1BA (SIE), CQDA2 (SIE), CQDBA (SIE), CQDST12 (SIE), CQDST120 (SIE), CQDST120AAS (SIE), CQDST125 (SIE), CQDST24 (SIE), CQDST240 (SIE), CQDST277 (SIE), CQDST48 (SIE), CQDST480 (SIE), CQDST600 (SIE), ECQML12 (SIE), EX11 (SIE), RS2641 (SIE), RS2642 (SIE), RS2643 (SIE), RS2644 (SIE), RS4755 (SIE), RS4756 (SIE), RS5773 (SIE), RS5774 (SIE), RS5783 (SIE), RS5784 (SIE), RS5785 (SIE), RS5786 (SIE), RS5787 (SIE), RS5788 (SIE), S01QR2 (SIE), S07QR2 (SIE), SBMIQR (SIE), 29348 (SQD), AHEXLI (SQD), AL1000MAT (SQD), AL1200NE6T (SQD), AL250KIT (SQD), AL400LAT (SQD), AL600IN (SQD), AL600LI35T (SQD), AL600LI5T (SQD), AL900MAT (SQD), FAT (SQD), HRK1020 (SQD), HRK30 (SQD), LA11021 (SQD), LA11027 (SQD), LA11028 (SQD), LA11029 (SQD), LA11037 (SQD), LA11042 (SQD), LA11121 (SQD), LA11124 (SQD), LA11212 (SQD), LA11352 (SQD), LA1G (SQD), QMB100R (SQD), QMB200EK (SQD), QMB300EK (SQD), QMB36R (SQD), QMB4060R (SQD), QMB60R (SQD), QMB610EK (SQD), QO-1HT (SQD), QO1PJ15 (SQD), QO2DTI (SQD), S32477 (SQD), S32478 (SQD), S37423 (SQD), S37424 (SQD), S37425 (SQD), S37426 (SQD), S37427 (SQD), S37428 (SQD), S37429 (SQD), S37430 (SQD), S37433 (SQD), S37434 (SQD), S37437 (SQD), S37438 (SQD), S37439 (SQD), S432475 (SQD), S432476 (SQD)
terminal-shield	CLRSJL2 (SIE), PRDBS1 (SIE), TSLF3 (SIE), TSLF4 (SIE), TSLL3 (SIE), TSLL4 (SIE), TSLM3 (SIE), TSLM3M (SIE), TSLM4 (SIE), TSLM4M (SIE), TSSL3 (SIE), TSSL4 (SIE), TSSM3 (SIE), TSSM4 (SIE), ILMLC2W (SQD), ILMLC3W (SQD), ILMLC4W (SQD), QOFSHALB12 (SQD), QOFSLALB12 (SQD)

Component type	Parts (OEM PN → page)
rear-stud	RTLDLF (SIE), RTLDLR (SIE), RTLDSF (SIE), RTLDSR (SIE), RTLFLF (SIE), RTLFLR (SIE), RTLFSF (SIE), RTLFSR (SIE), RTLJLF (SIE), RTLJSF (SIE), RTLJSR (SIE), RTLLSF (SIE), RTLNSF (SIE), SRTDF3 (SIE), SRTDF4 (SIE), SRTDR3 (SIE), SRTDR4 (SIE), SRTFF3 (SIE), SRTFF4 (SIE), SRTFR3 (SIE), SRTFR4 (SIE), SRTJF4 (SIE), SRTJR3 (SIE), SRTJR4 (SIE), SRTLF3 (SIE), SRTLF4 (SIE), SRTMF3 (SIE), SRTMF4 (SIE), SRTNF3 (SIE), SRTNF4 (SIE)
handle-lock	1256C42G01 (EAT), 1256C42G02 (EAT), 1294C01H01 (EAT), BHT (EAT), EFHB (EAT), LKD1 (EAT), LKD3 (EAT), LKD4 (EAT), QL1HT (EAT), QL1NPL (EAT), QL23NPL (EAT), 1LOK (FPE), SBD1 (GEA), TEYLD1 (GEA), TEYXHT2 (GEA), TEYXHT2K (GEA), TEYXHT3 (GEA), TEYXHT3K (GEA), TFKLD1 (GEA), THL103 (GEA), THT104 (GEA), TLD3 (GEA), TQ3HTK (GEA), TQ4HTK (GEA), TQHT1 (GEA), TQPL (GEA), BQDHBD (SIE), BQDHT2 (SIE), BQDHT3 (SIE), E2HBL (SIE), ECBX231M (SIE), ECQL1 (SIE), ECQTH2 (SIE), ECQTH3 (SIE), FD6HB1 (SIE), HBLQR (SIE), JD6HBL (SIE), MN6BL (SIE), FA3HT (SQD), FKHT (SQD), FY3HT (SQD), HLO-1 (SQD), LA1CL (SQD), LAHT (SQD), QO1LO (SQD), QO3HT (SQD), QOTHT (SQD)
padlock-attachment	1223C77G03 (EAT), 1223C77G05 (EAT), 1223C77G06 (EAT), 2A1912-1 (EAT), 2A1912-2 (EAT), 2A1912-3 (EAT), 2A1912-4 (EAT), 2A1912-5 (EAT), BRLW (EAT), BRLW1 (EAT), EFPHB (EAT), EFPHBOFF (EAT), EFPHL (EAT), EFPHLOFF (EAT), FJPHBOFF (EAT), FJPHL (EAT), FJPHLOFF (EAT), GPHBOFF (EAT), HLK4 (EAT), HLK4LOFF (EAT), HLK4S (EAT), HLK4SOFF (EAT), HLK6 (EAT), HLK6OFF (EAT), LBHPOFF (EAT), LPHL (EAT), LPHLOFF (EAT), PHB3 (EAT), PHL1 (EAT), PLK1 (EAT), PLK1LOFF (EAT), PLK1ROFF (EAT), PLK3 (EAT), PLK3LOFF (EAT), PLK3ROFF (EAT), PLK5 (EAT), PLK55OFF (EAT), PLK5S (EAT), PLK5SOFF (EAT), QC123PL (EAT), QC123PLOFF (EAT), QL123PL (EAT), QL123PLOFF (EAT), QL1PL (EAT), FB1PE (GEA), FB1PF (GEA), FC1PE (GEA), FC1PF (GEA), FCPLD (GEA), FE1PE (GEA), FG1PE (GEA), FGPLD (GEA), SEFPLD2 (GEA), SEPLD (GEA), SGPLD (GEA), SGPLD2 (GEA), SKPLD (GEA), SKPLD2 (GEA), TEDPLD2 (GEA), TEFPLD1 (GEA), TEYPLD1 (GEA), TEYXPLD1 (GEA), TFKPLD1 (GEA), THP100 (GEA), THQGFPLD1 (GEA), TJKPLD1 (GEA), TJKPLD2 (GEA), TKMPLD1 (GEA), TLC1PLD1 (GEA), TLC1PLD2 (GEA), TLC4PLD1 (GEA), TLC4PLD2 (GEA), TQDLPDL1 (GEA), TQDPLD1 (GEA), TQPDLD2 (GEA), TQPLD1 (GEA), TQPPL (GEA), BQDPLD (SIE), ECPLD1 (SIE), ECPLD1R (SIE), ECPLD2 (SIE), ECPLD2R (SIE), ECPLD3 (SIE), ECPLD3R (SIE), ECQLD3 (SIE), ECQLD4 (SIE), ECQLN3 (SIE), ECQTH4 (SIE), ED2HPL (SIE), FD6PL1 (SIE), HPLG (SIE), HPLQR (SIE), JD6HPL (SIE), MN6PLD (SIE), EDPAF (SQD), GFI2PA (SQD), HJPA (SQD), HPA-2QFS (SQD), HPAFD (SQD), HPA-FK (SQD), HPA-FYQ (SQD), HPA-LM (SQD), HPAXLM (SQD), QO1HPL (SQD), QO-1PA (SQD), QO1PAF (SQD), QO-1PL (SQD), QO2PAF (SQD), QOADV1PAF (SQD), QOGFI2PAF (SQD), QOHPL (SQD), QOTHPA (SQD), S29370 (SQD), S29371 (SQD), S37422 (SQD)
other	114B361H01 (EAT), 267P963H01 (EAT), 267P963H02 (EAT), 2A1910-1 (EAT), 2A1910-2 (EAT), 2A1910-3 (EAT), 2A1910-4 (EAT), 2A1915 (EAT), 2A1919 (EAT), 2A1961-1 (EAT), 6725D41H30 (EAT), CCPB-n-xxCF (EAT), E2A1914 (EAT), 113A5356P1 (GEA), 113A5357P1 (GEA), 139C5491G1 (GEA), 139C5491P4 (GEA), 139C5612P2 (GEA), 139C5612P3 (GEA), 252B3657P1 (GEA), 252B3657P2 (GEA), 331A1519G1 (GEA), 331A1519G10 (GEA), 331A1519G11 (GEA), 331A1519G12 (GEA), 331A1519G13 (GEA), 331A1519G14 (GEA), 331A1519G15 (GEA), 331A1519G16 (GEA), 331A1519G17 (GEA), 331A1519G18 (GEA), 331A1519G19 (GEA), 331A1519G2 (GEA), 331A1519G20 (GEA), 331A1519G21 (GEA), 331A1519G22 (GEA), 331A1519G3 (GEA), 331A1519G4 (GEA), 331A1519G5 (GEA), 331A1519G6 (GEA), 331A1519G7 (GEA), 331A1519G8 (GEA), 331A1519G9 (GEA), 331A1543G1 (GEA), 331A1545G1 (GEA), 331A1545G2 (GEA), 331A1545G3 (GEA), 331A1545G4 (GEA), 331A1545G5 (GEA), 331A1545G6 (GEA), 331A1545G7 (GEA), 331A1545G8 (GEA), 569B737P1 (GEA), 569B737P2 (GEA), 569B737P5 (GEA), 569B806G1 (GEA), 569B806G2 (GEA), 569B806G3 (GEA), 75A105457 (GEA), 75B125198P101 (GEA), 75V100083P101 (GEA), AMCB6QD (GEA), APN48 (GEA), APN49 (GEA), APN84 (GEA), APN99 (GEA), ASPCORBNTEU1 (GEA), ASPYALE47 (GEA), DPJ2185 (GEA), TEU-1 (GEA), UBIF015N (OTH), UBIF020N (OTH), UBIF0215N (OTH), UBIF0220N (OTH), UBIF0230N (OTH), UBIF0240N (OTH), UBIF0250N (OTH), UBIF030N (OTH), UBIF040N (OTH), UBIF050N (OTH), UBIF15N (OTH), UBIF20N (OTH), UBIF215N (OTH), UBIF220N (OTH), UBIF230N (OTH), UBIF240N (OTH), UBIF250N (OTH), UBIF260N (OTH), UBIF270N (OTH), UBIF30N (OTH), UBIF340N (OTH), UBIF380NB (OTH), UBIF40N (OTH), UBIF50N (OTH), UBIFPE1003 (OTH), UBIP115 (OTH), UBIP120 (OTH), UBIP130 (OTH), UBIP1515 (OTH), UBIP1520 (OTH), UBIP2020 (OTH), UBIP2100 (OTH), UBIP215 (OTH), UBIP220 (OTH), UBIP230 (OTH), UBIP240 (OTH), UBIP250 (OTH), UBIP260 (OTH), UBIP270 (OTH), UBIZ0220 (OTH), UBIZ0230 (OTH), UBIZ0240 (OTH), UBIZ0250 (OTH), UBIZ0260 (OTH), UBIZ15 (OTH), UBIZ1515 (OTH), UBIZ1520 (OTH), UBIZ20 (OTH), UBIZ2020 (OTH), UBIZ2100 (OTH), UBIZ2125 (OTH), UBIZ220 (OTH), UBIZ230 (OTH), UBIZ240 (OTH), UBIZ250 (OTH), UBIZ260 (OTH), UBIZ270 (OTH), UBIZ280 (OTH), UBIZ290 (OTH), UBIZ30 (OTH), UBIZ3030 (OTH), LPDC01 (SIE), LPDC02 (SIE), LPKEY01A (SIE), LPKEY01B (SIE), LPLOCK01A (SIE), LPLOCK02A (SIE), LPLOCK03A (SIE), MCHK (SIE), NBK01A (SIE), NBK02A (SIE), NBK03A (SIE), NBK3 (SIE), NBK4 (SIE), NBK5 (SIE), NBK6 (SIE), NBK7 (SIE), NBK8 (SIE), SQRC (SIE), 4052017302 (SQD), 4052021450 (SQD), 4052021650 (SQD), 4052031850 (SQD), 4052036750 (SQD), 4052085601 (SQD), 50552-108-01 (SQD), 80031-024-02 (SQD), 8003115801 (SQD), 8003115901 (SQD), 8004332501 (SQD), LP9618 (SQD), LSDL (SQD), PK22FL (SQD), PK-3SP (SQD), PK-49SP (SQD), PK-4FL (SQD), PK4NVL (SQD), PK5FL (SQD), PSDS (SQD), QMB210T (SQD), QMB2240 (SQD), QMB303T (SQD), QMB306T (SQD), QMB310T (SQD), QMB323TD (SQD), QMB3240 (SQD), QMB3260 (SQD), QMB3606T (SQD), QMB3620 (SQD), QMB362T (SQD), QMB364 (SQD), QMB3640 (SQD), QSFB (SQD), S48899 (SQD), SWLUB (SQD)

12.6 Rating and pole index

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00687	1253C73G01	150 A	—	—	533
EDH-EAT-00688	1253C73G05	150 A	—	600 V	534
EDH-EAT-00686	1253C73G06	100 A	—	600 V	535
EDH-EAT-00635	1266C07G01	—	2,3	—	564
EDH-EAT-00703	208B264H01	—	2,3	—	596
EDH-EAT-00704	208B297H01	—	2,3	—	622

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00689	2600D26G01	250 A	—	—	563
EDH-EAT-00690	2600D26G02	250 A	—	—	563
EDH-EAT-00792	2A1909-1	70-200A	—	—	393
EDH-EAT-00801	2A1909-10	30-60A	—	—	393
EDH-EAT-00802	2A1909-11	30-60A	—	—	394
EDH-EAT-00803	2A1909-12	30-60A	—	—	394
EDH-EAT-00804	2A1909-13	30-60A	—	—	395
EDH-EAT-00805	2A1909-14	70-200A	—	—	395
EDH-EAT-00806	2A1909-15	70-200A	—	—	396
EDH-EAT-00807	2A1909-16	30-200A	—	—	402
EDH-EAT-00808	2A1909-17	30-60A	—	—	396
EDH-EAT-00809	2A1909-18	30-60A	—	—	397
EDH-EAT-00810	2A1909-19	30-60A	—	—	391
EDH-EAT-00793	2A1909-2	70-200A	—	—	397
EDH-EAT-00811	2A1909-20	225-400A	—	—	398
EDH-EAT-00812	2A1909-21	225-400A	—	—	398
EDH-EAT-00813	2A1909-22	225-400A	—	—	402
EDH-EAT-00814	2A1909-23	225-400A	—	—	399
EDH-EAT-00815	2A1909-24	225-400A	—	—	399
EDH-EAT-00816	2A1909-25	225-400A	—	—	403
EDH-EAT-00817	2A1909-26	225-400A	—	—	400
EDH-EAT-00818	2A1909-27	225-400A	—	—	400
EDH-EAT-00819	2A1909-28	225-400A	—	—	403
EDH-EAT-00820	2A1909-29	225-400A	—	—	391
EDH-EAT-00794	2A1909-3	30-200A	—	—	404
EDH-EAT-00795	2A1909-4	70-200A	—	—	391
EDH-EAT-00796	2A1909-5	70-200A	—	—	401
EDH-EAT-00797	2A1909-6	70-200A	—	—	401
EDH-EAT-00798	2A1909-7	30-200A	—	—	404
EDH-EAT-00799	2A1909-8	30-60A	—	—	392
EDH-EAT-00800	2A1909-9	30-60A	—	—	392
EDH-EAT-00164	2C11642	Sum of horizontally twin-mounted breakers shall not exceed 140 A	—	—	236
EDH-EAT-00479	2T400K	400 A max breaker	2	—	575
EDH-EAT-00494	2T400KCW	400 A max breaker	2	—	576
EDH-EAT-00488	2T402K	400 A max breaker	2	—	576
EDH-EAT-00474	2TA400K	400 A max breaker	2	—	577
EDH-EAT-00491	2TA400KCW	400 A max breaker	2	—	578
EDH-EAT-00482	2TA401K	400 A max breaker	2	—	578
EDH-EAT-00497	2TA401KCW	400 A max breaker	2	—	579
EDH-EAT-00500	2TA401LDK	400 A max breaker	2	—	609
EDH-EAT-00485	2TA402K	400 A max breaker	2	—	579
EDH-EAT-00505	2TA603LDK	600 A max breaker	2	—	610
EDH-EAT-00510	2TA603LDKCW	—	2	—	611
EDH-EAT-00664	314C960G07	600 A	—	—	624
EDH-EAT-00665	314C960G08	600 A	—	—	624
EDH-EAT-00666	314C960G09	600 A	—	—	625
EDH-EAT-00671	314C960G10	800 A	—	—	641
EDH-EAT-00672	314C960G11	800 A	—	—	641
EDH-EAT-00678	373B375G03	120 A	—	—	653
EDH-EAT-00677	373B375G04	120 A	—	—	653
EDH-EAT-00654	374D883G01	225 A	—	—	546

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00655	374D883G02	225 A	—	—	546
EDH-EAT-00452	3BRS225	225 A	Three-pole	—	24
EDH-EAT-00451	3BRSF150	150 A	Three-pole	—	24
EDH-EAT-00462	3T100FB	100 A max breaker	—	—	524
EDH-EAT-00536	3T125EF	125 A max breaker	—	—	660
EDH-EAT-00466	3T150FB	200 A max breaker	—	—	525
EDH-EAT-00461	3T20FB	20 (EHD) A max breaker	—	—	526
EDH-EAT-00468	3T225FD	225 A	—	—	526
EDH-EAT-00480	3T400K	400 A max breaker	3	—	580
EDH-EAT-00495	3T400KCW	400 A max breaker	3	—	581
EDH-EAT-00489	3T402K	400 A max breaker	3	—	581
EDH-EAT-00545	3T631LK	400 A max breaker	3	—	684
EDH-EAT-00549	3T632LK	630 A max breaker	3	—	685
EDH-EAT-00556	3T632LKW	—	3	—	686
EDH-EAT-00465	3TA100FD	100 A max breaker	—	—	527
EDH-EAT-00620	3TA100G3K	100 A	—	—	556
EDH-EAT-00621	3TA100G6K	100 A	—	—	557
EDH-EAT-00577	3TA125E3K	125 A	—	—	660
EDH-EAT-00537	3TA125EF	125 A max breaker	3	—	661
EDH-EAT-00538	3TA150EF	125/160 A max breaker	3	—	662
EDH-EAT-00622	3TA150F3K	225 A	—	—	528
EDH-EAT-00623	3TA150F6K	225 A	—	—	528
EDH-EAT-00469	3TA150FB	150 A	—	—	530
EDH-EAT-00539	3TA160EFK	160 A max breaker	3	—	663
EDH-EAT-00463	3TA225FD	225 A max breaker	—	—	530
EDH-EAT-00467	3TA225FDK	225 A max breaker	—	—	531
EDH-EAT-00579	3TA250FJ3	250 A	—	—	672
EDH-EAT-00580	3TA250FJ6	250 A	—	—	673
EDH-EAT-00624	3TA250J3K	250 A	—	—	559
EDH-EAT-00625	3TA250J6K	250 A	—	—	560
EDH-EAT-00475	3TA400K	400 A max breaker	3	—	582
EDH-EAT-00626	3TA400K3K	400 A	—	—	582
EDH-EAT-00627	3TA400K6K	400 A	—	—	583
EDH-EAT-00492	3TA400KCW	400 A max breaker	3	—	584
EDH-EAT-00483	3TA401K	400 A max breaker	3	—	584
EDH-EAT-00498	3TA401KCW	400 A max breaker	3	—	585
EDH-EAT-00501	3TA401LDK	400 A max breaker	3	—	611
EDH-EAT-00486	3TA402K	400 A max breaker	3	—	586
EDH-EAT-00464	3TA50FB	50 A max breaker	—	—	532
EDH-EAT-00506	3TA603LDK	600 A max breaker	3	—	612
EDH-EAT-00511	3TA603LDKCW	600 A	3	—	613
EDH-EAT-00543	3TA631LK	400 A max breaker	3	—	686
EDH-EAT-00547	3TA632LK	630 A max breaker	3	—	687
EDH-EAT-00554	3TA632LKW	—	3	—	688
EDH-EAT-00633	4210B95G01	—	3	—	540
EDH-EAT-00634	4210B95G02	—	4	—	540
EDH-EAT-00692	4212B77G01	400 A	—	—	595
EDH-EAT-00691	4212B78G02	400 A	—	—	596
EDH-EAT-00652	451D874G01	100 A	—	—	547
EDH-EAT-00653	451D874G02	100 A	—	—	548
EDH-EAT-00481	4T400K	400 A max breaker	4	—	587
EDH-EAT-00496	4T400KCW	400 A max breaker	4	—	587

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00490	4T402K	400 A max breaker	4	—	588
EDH-EAT-00546	4T631LK	400 A max breaker	4	—	689
EDH-EAT-00550	4T632LK	630 A max breaker	4	—	689
EDH-EAT-00557	4T632LKW	—	4	—	689
EDH-EAT-00540	4TA160EFK	160 A max breaker	—	—	664
EDH-EAT-00476	4TA400K	400 A max breaker	4	—	588
EDH-EAT-00493	4TA400KCW	400 A max breaker	4	—	589
EDH-EAT-00484	4TA401K	400 A max breaker	4	—	589
EDH-EAT-00499	4TA401KCW	400 A max breaker	4	—	590
EDH-EAT-00502	4TA401LDK	400 A max breaker	4	—	614
EDH-EAT-00487	4TA402K	400 A max breaker	4	—	590
EDH-EAT-00507	4TA603LDK	600 A max breaker	4	—	614
EDH-EAT-00512	4TA603LDKCW	—	4	—	615
EDH-EAT-00544	4TA631LK	400 A max breaker	4	—	690
EDH-EAT-00548	4TA632LK	630 A max breaker	4	—	690
EDH-EAT-00555	4TA632LKW	—	4	—	691
EDH-EAT-00698	505C606G04	1200 A	—	—	649
EDH-EAT-00699	505C606G05	1200 A	—	—	650
EDH-EAT-00700	505C606G06	1200 A	—	—	651
EDH-EAT-00694	506C052G01	600 A	—	—	620
EDH-EAT-00674	623B222G01	800 A	—	—	654
EDH-EAT-00702	624B600H01	—	3	—	538
EDH-EAT-00701	624B600H02	—	2	—	539
EDH-EAT-00693	624B609G01	600 A	—	—	621
EDH-EAT-00629	625B229G06	—	1	—	540
EDH-EAT-00630	625B229G07	—	2	—	541
EDH-EAT-00631	625B229G08	—	3	—	541
EDH-EAT-00632	625B229G09	—	4	—	541
EDH-EAT-00636	6631C01G01	—	4	—	564
EDH-EAT-00637	6641C16G01	—	2,3	—	565
EDH-EAT-00638	6641C16G02	—	4	—	565
EDH-EAT-00658	6642C14G02	400 A	—	—	602
EDH-EAT-00659	6642C14G04	400 A	—	—	603
EDH-EAT-00662	6642C14G05	400 A	—	—	603
EDH-EAT-00679	673B142G02	50 A	—	600 V	535
EDH-EAT-00680	673B142G10	100 A	—	600 V	536
EDH-EAT-00933	99-3613	400 A main lugs	—	—	160
EDH-EAT-00935	99-3613-10	600 A main lugs	—	—	160
EDH-EAT-00925	99-3613-14	225 A main lugs	—	—	161
EDH-EAT-00932	99-3613-15	400 A main lugs	—	—	161
EDH-EAT-00934	99-3613-18	600 A main lugs	—	—	161
EDH-EAT-00929	99-3613-2	225 A main lugs	—	—	161
EDH-EAT-00928	99-3613-21	600 A main lugs	—	—	162
EDH-EAT-00927	99-3613-24	400 A main lugs	—	—	162
EDH-EAT-00926	99-3613-31	400 A main lugs	—	—	162
EDH-EAT-00931	99-3613-6	225 A main lugs	—	—	162
EDH-EAT-00930	99-3613-7	225 A main lugs	—	—	163
EDH-EAT-00533	B2016RD	2000 A	—	—	658
EDH-EAT-00534	B2016RDL	2000 A	—	—	658
EDH-EAT-00535	B2500RD	2500 A	—	—	659
EDH-EAT-00453	BRL200	200 A	Two-pole	120/240V, 208Y/120, 240V	23

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00450	BRS225	225 A	Two-pole	—	25
EDH-EAT-00448	BRSF125	125 A	Two-pole	—	25
EDH-EAT-00449	BRSF150	150 A	Two-pole	—	26
EDH-EAT-00766	CCA4K	225 A max, 240 V	—	—	107
EDH-EAT-00767	CED3K	225 A max, 600 V	—	—	108
EDH-EAT-00769	CED4BK	225 A max, 600 V	—	—	108
EDH-EAT-00768	CED4K	225 A max, 240 V	—	—	108
EDH-EAT-00770	CFD3K	150 A max, 600 V	—	—	108
EDH-EAT-00772	CFD4BK	150 A max, 600 V	—	—	109
EDH-EAT-00771	CFD4K	150 A max, 600 V	—	—	109
EDH-EAT-00773	CJD4K	250 A max, 600 V	—	—	109
EDH-EAT-00775	CJDS4BK	250 A max, 600 V	—	—	109
EDH-EAT-00774	CJDS4K	250 A max, 600 V	—	—	110
EDH-EAT-00778	CKDS4BK	400 A max, 600 V	—	—	110
EDH-EAT-00777	CKDS4K	400 A max, 600 V	—	—	110
EDH-EAT-00779	CLD4K	600 A max, 600 V	—	—	111
EDH-EAT-00780	CLDS4BK	600 A max, 600 V	—	—	111
EDH-EAT-00781	CMD4K	800 A max, 600 V	—	—	111
EDH-EAT-00782	CND4K	1200 A max, 600 V	—	—	111
EDH-EAT-00901	EELD36600SB2	600 A	—	—	121
EDH-EAT-00584	EF2RTDK	—	2	—	668
EDH-EAT-00581	EF2RTWK	—	2	—	669
EDH-EAT-00585	EF3RTDK	—	3	—	669
EDH-EAT-00582	EF3RTWK	—	3	—	670
EDH-EAT-00586	EF4RTDK	—	4	—	671
EDH-EAT-00583	EF4RTWK	—	4	—	672
EDH-EAT-00570	EFTS3K	—	3	—	666
EDH-EAT-00617	FCWTK	150 A	—	—	548
EDH-EAT-00618	FCWTK225	225 A	—	—	550
EDH-EAT-01207	FDPBS324R	200 A	3	240 V	492
EDH-EAT-01208	FDPBS364R	200 A	3	600 V	493
EDH-EAT-01209	FDPBT3244R	200-200 A	3	240 V	494
EDH-EAT-01210	FDPBT3644R	200-200 A	3	600 V	494
EDH-EAT-01211	FDPW325R	400 A	3	240 V	494
EDH-EAT-01213	FDPW326R	600 A	3	240 V	495
EDH-EAT-01215	FDPW327	800 A	3	240 V	496
EDH-EAT-01217	FDPW328	1200 A	3	240 V	496
EDH-EAT-01212	FDPW365R	400 A	3	600 V	496
EDH-EAT-01214	FDPW366R	600 A	3	600 V	497
EDH-EAT-01216	FDPW367	800 A	3	600 V	498
EDH-EAT-01218	FDPW368	1200 A	3	600 V	499
EDH-EAT-01201	FDPWT3211R	30-30 A	3	240 V	500
EDH-EAT-01203	FDPWT3222R	60-60 A	3	240 V	501
EDH-EAT-01205	FDPWT3233R	100-100 A	3	240 V	502
EDH-EAT-01202	FDPWT3611R	30-30 A	3	600 V	503
EDH-EAT-01204	FDPWT3622R	60-60 A	3	600 V	504
EDH-EAT-01206	FDPWT3633R	100-100 A	3	600 V	505
EDH-EAT-00589	FJ3RTDK	—	3	—	680
EDH-EAT-00587	FJ3RTWK	—	3	—	681
EDH-EAT-00590	FJ4RTDK	—	4	—	681
EDH-EAT-00588	FJ4RTWK	—	4	—	682
EDH-EAT-00568	FJIPBK	—	3	—	676

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00569	FJIPBK4	—	4	—	677
EDH-EAT-00566	FJTS3K	—	3	—	678
EDH-EAT-00567	FJTS4K	—	4	—	679
EDH-EAT-00006	KB11AFB	100 A max	2-pole (single-phase A/C)	—	180
EDH-EAT-00005	KB11AFT	100 A max	2-pole (single-phase A/C)	—	181
EDH-EAT-00008	KB11SFB	100 A max	2-pole (single-phase A/C)	—	181
EDH-EAT-00007	KB11SFT	100 A max	2-pole (single-phase A/C)	—	182
EDH-EAT-00002	KB13AFB	100 A max	3-pole (A/B/C)	—	182
EDH-EAT-00001	KB13AFT	100 A max	3-pole (A/B/C)	—	183
EDH-EAT-00004	KB13SFB	100 A max	3-pole (A/B/C)	—	183
EDH-EAT-00003	KB13SFT	100 A max	3-pole (A/B/C)	—	184
EDH-EAT-00014	KB21AFB	225 A max	2-pole (single-phase A/C)	—	184
EDH-EAT-00013	KB21AFT	225 A max	2-pole (single-phase A/C)	—	185
EDH-EAT-00016	KB21SFB	225 A max	2-pole (single-phase A/C)	—	185
EDH-EAT-00015	KB21SFT	225 A max	2-pole (single-phase A/C)	—	186
EDH-EAT-00010	KB23AFB	225 A max	3-pole (A/B/C)	—	186
EDH-EAT-00009	KB23AFT	225 A max	3-pole (A/B/C)	—	187
EDH-EAT-00012	KB23SFB	225 A max	3-pole (A/B/C)	—	187
EDH-EAT-00011	KB23SFT	225 A max	3-pole (A/B/C)	—	188
EDH-EAT-00022	KB41AJB	400 A class (frame)	2-pole (single-phase A/C)	—	188
EDH-EAT-00021	KB41AJT	400 A class (frame)	2-pole (single-phase A/C)	—	189
EDH-EAT-00030	KB41AKB	400 A class (frame)	2-pole (single-phase A/C)	—	189
EDH-EAT-00029	KB41AKT	400 A class (frame)	2-pole (single-phase A/C)	—	190
EDH-EAT-00024	KB41SJB	400 A class (frame)	2-pole (single-phase A/C)	—	190
EDH-EAT-00023	KB41SJT	400 A class (frame)	2-pole (single-phase A/C)	—	191
EDH-EAT-00032	KB41SKB	400 A class (frame)	2-pole (single-phase A/C)	—	191
EDH-EAT-00031	KB41SKT	400 A class (frame)	2-pole (single-phase A/C)	—	192
EDH-EAT-00018	KB43AJB	400 A class (frame)	3-pole (A/B/C)	—	192
EDH-EAT-00017	KB43AJT	400 A class (frame)	3-pole (A/B/C)	—	193

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00026	KB43AKB	400 A class (frame)	3-pole (A/B/C)	—	193
EDH-EAT-00025	KB43AKT	400 A class (frame)	3-pole (A/B/C)	—	194
EDH-EAT-00020	KB43SJB	400 A class (frame)	3-pole (A/B/C)	—	194
EDH-EAT-00019	KB43SJT	400 A class (frame)	3-pole (A/B/C)	—	195
EDH-EAT-00028	KB43SKB	400 A class (frame)	3-pole (A/B/C)	—	195
EDH-EAT-00027	KB43SKT	400 A class (frame)	3-pole (A/B/C)	—	196
EDH-EAT-00343	KCDPCA	225 A frame	3	—	84
EDH-EAT-00341	KCDPED225	225 A frame	3	—	85
EDH-EAT-00340	KCDPFB100	100 A maximum	3	—	85
EDH-EAT-00342	KCDPFBP	100 A (FB-P 15-100 A)	3	—	86
EDH-EAT-00344	KCDPKB	250 A frame	3	—	87
EDH-EAT-00346	KCDPLA400	400 A (LA-P 70-400 A)	3	—	88
EDH-EAT-00347	KCDPLA600	600 A frame	3	—	88
EDH-EAT-00345	KCDPLB	400 A frame	3	—	89
EDH-EAT-00348	KCDPLCL	LCL 125-400 A	3	—	90
EDH-EAT-00349	KCDPMC	800 A frame	3	—	90
EDH-EAT-00351	KCDPNBP	800 A (NB-P 300-800 A)	3	—	91
EDH-EAT-00350	KCDPNC	1200 A frame; not rated for 100 percent breakers	3	—	92
EDH-EAT-00366	KFDP4XT	—	3	—	72
EDH-EAT-00367	KFDP5XT	—	3	—	72
EDH-EAT-00368	KFDPB6X-2	—	3	—	73
EDH-EAT-00430	KFDPBS324R	200 A	3	240 V	124
EDH-EAT-00431	KFDPBS364R	200 A	3	600 V	124
EDH-EAT-00370	KFDPW11X-6	—	3	—	73
EDH-EAT-00371	KFDPW11X-8	—	3	—	74
EDH-EAT-00372	KFDPW15X-12	—	3	—	74
EDH-EAT-00432	KFDPW325R	400 A	3	240 V	125
EDH-EAT-00434	KFDPW326R	600 A	3	240 V	125
EDH-EAT-00433	KFDPW365R	400 A	3	600 V	126
EDH-EAT-00435	KFDPW366R	600 A	3	600 V	126
EDH-EAT-00436	KFDPW367	800 A	3	240/600 V	127
EDH-EAT-00437	KFDPW368	1200 A	3	240/600 V	127
EDH-EAT-00369	KFDPW9X-4	—	3	—	75
EDH-EAT-00424	KFDPWT3211R	30 A	3	240 V	128
EDH-EAT-00426	KFDPWT3222R	60 A	3	240 V	128
EDH-EAT-00428	KFDPWT3233R	100 A	3	240 V	129
EDH-EAT-00425	KFDPWT3611R	30 A	3	600 V	129
EDH-EAT-00427	KFDPWT3622R	60 A	3	600 V	130
EDH-EAT-00429	KFDPWT3633R	100 A	3	600 V	130
EDH-EAT-00067	KL11AMF	100 A	—	—	228
EDH-EAT-00071	KL11AMO	100 A	—	—	200
EDH-EAT-00063	KL11AMS	100 A	—	—	200
EDH-EAT-00079	KL11AVF	100 A	—	—	229
EDH-EAT-00083	KL11AVO	100 A	—	—	201
EDH-EAT-00075	KL11AVS	100 A	—	—	201
EDH-EAT-00088	KL11SCF	100 A	—	—	229
EDH-EAT-00090	KL11SCO	100 A	—	—	201
EDH-EAT-00086	KL11SCS	100 A	—	—	202
EDH-EAT-00068	KL11SMF	100 A	—	—	229
EDH-EAT-00072	KL11SMO	100 A	—	—	202
EDH-EAT-00064	KL11SMS	100 A	—	—	202

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00080	KL11SVF	100 A	—	—	230
EDH-EAT-00084	KL11SVO	100 A	—	—	203
EDH-EAT-00076	KL11SVS	100 A	—	—	203
EDH-EAT-00065	KL13AMF	100 A	—	—	230
EDH-EAT-00069	KL13AMO	100 A	—	—	203
EDH-EAT-00061	KL13AMS	100 A	—	—	204
EDH-EAT-00077	KL13AVF	100 A	—	—	230
EDH-EAT-00081	KL13AVO	100 A	—	—	204
EDH-EAT-00073	KL13AVS	100 A	—	—	204
EDH-EAT-00087	KL13SCF	100 A	—	—	231
EDH-EAT-00089	KL13SCO	100 A	—	—	205
EDH-EAT-00085	KL13SCS	100 A	—	—	205
EDH-EAT-00066	KL13SMF	100 A	—	—	231
EDH-EAT-00070	KL13SMO	100 A	—	—	205
EDH-EAT-00062	KL13SMS	100 A	—	—	206
EDH-EAT-00078	KL13SVF	100 A	—	—	231
EDH-EAT-00082	KL13SVO	100 A	—	—	206
EDH-EAT-00074	KL13SVS	100 A	—	—	206
EDH-EAT-00097	KL21AMF	225 A	—	—	232
EDH-EAT-00101	KL21AMO	225 A	—	—	207
EDH-EAT-00093	KL21AMS	225 A	—	—	207
EDH-EAT-00109	KL21AVF	225 A	—	—	232
EDH-EAT-00113	KL21AVO	225 A	—	—	207
EDH-EAT-00105	KL21AVS	225 A	—	—	208
EDH-EAT-00118	KL21SCF	225 A	—	—	232
EDH-EAT-00120	KL21SCO	225 A	—	—	208
EDH-EAT-00116	KL21SCS	225 A	—	—	208
EDH-EAT-00098	KL21SMF	225 A	—	—	233
EDH-EAT-00102	KL21SMO	225 A	—	—	209
EDH-EAT-00094	KL21SMS	225 A	—	—	209
EDH-EAT-00110	KL21SVF	225 A	—	—	233
EDH-EAT-00114	KL21SVO	225 A	—	—	209
EDH-EAT-00106	KL21SVS	225 A	—	—	210
EDH-EAT-00095	KL23AMF	225 A	—	—	233
EDH-EAT-00099	KL23AMO	225 A	—	—	210
EDH-EAT-00091	KL23AMS	225 A	—	—	210
EDH-EAT-00107	KL23AVF	225 A	—	—	234
EDH-EAT-00111	KL23AVO	225 A	—	—	211
EDH-EAT-00103	KL23AVS	225 A	—	—	211
EDH-EAT-00117	KL23SCF	225 A	—	—	234
EDH-EAT-00119	KL23SCO	225 A	—	—	211
EDH-EAT-00115	KL23SCS	225 A	—	—	212
EDH-EAT-00096	KL23SMF	225 A	—	—	234
EDH-EAT-00100	KL23SMO	225 A	—	—	212
EDH-EAT-00092	KL23SMS	225 A	—	—	212
EDH-EAT-00108	KL23SVF	225 A	—	—	235
EDH-EAT-00112	KL23SVO	225 A	—	—	213
EDH-EAT-00104	KL23SVS	225 A	—	—	213
EDH-EAT-00127	KL41AMO	400 A	—	—	213
EDH-EAT-00123	KL41AMS	400 A	—	—	214
EDH-EAT-00135	KL41AVO	400 A	—	—	214
EDH-EAT-00131	KL41AVS	400 A	—	—	214

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00138	KL41SCO	400 A	—	—	215
EDH-EAT-00128	KL41SMO	400 A	—	—	215
EDH-EAT-00124	KL41SMS	400 A	—	—	215
EDH-EAT-00136	KL41SVO	400 A	—	—	216
EDH-EAT-00132	KL41SVS	400 A	—	—	216
EDH-EAT-00125	KL43AMO	400 A	—	—	216
EDH-EAT-00121	KL43AMS	400 A	—	—	217
EDH-EAT-00133	KL43AVO	400 A	—	—	217
EDH-EAT-00129	KL43AVS	400 A	—	—	217
EDH-EAT-00137	KL43SCO	400 A	—	—	218
EDH-EAT-00126	KL43SMO	400 A	—	—	218
EDH-EAT-00122	KL43SMS	400 A	—	—	218
EDH-EAT-00134	KL43SVO	400 A	—	—	219
EDH-EAT-00130	KL43SVS	400 A	—	—	219
EDH-EAT-00148	KL61CMO	600 A	—	—	219
EDH-EAT-00142	KL61CMS	600 A	—	—	220
EDH-EAT-00160	KL61CVO	600 A	—	—	220
EDH-EAT-00154	KL61CVS	600 A	—	—	220
EDH-EAT-00149	KL61SMO	600 A	—	—	221
EDH-EAT-00143	KL61SMS	600 A	—	—	221
EDH-EAT-00161	KL61SVO	600 A	—	—	221
EDH-EAT-00155	KL61SVS	600 A	—	—	222
EDH-EAT-00150	KL61TMO	600 A	—	—	222
EDH-EAT-00144	KL61TMS	600 A	—	—	222
EDH-EAT-00162	KL61TVO	600 A	—	—	223
EDH-EAT-00156	KL61TVS	600 A	—	—	223
EDH-EAT-00145	KL63CMO	600 A	—	—	223
EDH-EAT-00139	KL63CMS	600 A	—	—	224
EDH-EAT-00157	KL63CVO	600 A	—	—	224
EDH-EAT-00151	KL63CVS	600 A	—	—	224
EDH-EAT-00146	KL63SMO	600 A	—	—	225
EDH-EAT-00140	KL63SMS	600 A	—	—	225
EDH-EAT-00158	KL63SVO	600 A	—	—	225
EDH-EAT-00152	KL63SVS	600 A	—	—	226
EDH-EAT-00147	KL63TMO	600 A	—	—	226
EDH-EAT-00141	KL63TMS	600 A	—	—	226
EDH-EAT-00159	KL63TVO	600 A	—	—	227
EDH-EAT-00153	KL63TVS	600 A	—	—	227
EDH-EAT-00593	KPEK1	—	3	—	551
EDH-EAT-00591	KPEK12	225 A	2	—	551
EDH-EAT-00595	KPEK14	225 A	4	—	552
EDH-EAT-00597	KPEK2	—	3	—	571
EDH-EAT-00599	KPEK24	—	4	—	571
EDH-EAT-00601	KPEK3	—	3	—	605
EDH-EAT-00603	KPEK34	—	4	—	606
EDH-EAT-00605	KPEK4	—	3	—	626
EDH-EAT-00607	KPEK44	—	4	—	627
EDH-EAT-00594	KPEKM1	225 A	3	—	552
EDH-EAT-00592	KPEKM12	225 A	2	—	553
EDH-EAT-00596	KPEKM14	225 A	4	—	554
EDH-EAT-00598	KPEKM2	—	3	—	572
EDH-EAT-00600	KPEKM24	—	4	—	573

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00602	KPEKM3	—	3	—	607
EDH-EAT-00604	KPEKM34	—	4	—	608
EDH-EAT-00606	KPEKM4	—	3	—	627
EDH-EAT-00608	KPEKM44	—	4	—	628
EDH-EAT-00899	KPHCC3175S	175 A	—	—	157
EDH-EAT-00166	KPRL1BAB	Max 140 A connected to any one connector	—	—	172
EDH-EAT-00167	KPRL2GHB	Max 140 A connected to any one connector	—	—	172
EDH-EAT-00184	KPRL3ABA06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	325
EDH-EAT-00185	KPRL3ABA06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Single-phase	—	326
EDH-EAT-00186	KPRL3ABA12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	327
EDH-EAT-00187	KPRL3ABA12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Single-phase	—	328
EDH-EAT-00188	KPRL3ABA18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	329
EDH-EAT-00189	KPRL3ABA18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Single-phase	—	329
EDH-EAT-00190	KPRL3ABA24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	330
EDH-EAT-00191	KPRL3ABA24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	331
EDH-EAT-00206	KPRL3AFD2	140A max	Single-phase, three-phase	—	333
EDH-EAT-00205	KPRL3AFD3	140A max	Single-phase, three-phase	—	333
EDH-EAT-00192	KPRL3AGB06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	334
EDH-EAT-00193	KPRL3AGB06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	336
EDH-EAT-00194	KPRL3AGB12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	336
EDH-EAT-00195	KPRL3AGB12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Single-phase	—	337
EDH-EAT-00196	KPRL3AGB18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	337
EDH-EAT-00197	KPRL3AGB18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Single-phase	—	338
EDH-EAT-00198	KPRL3AGB24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	339
EDH-EAT-00199	KPRL3AGB24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	340
EDH-EAT-00788	KPRL3CF3	150 A max	—	—	112

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00168	KPRL3XBA06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	345
EDH-EAT-00169	KPRL3XBA06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	346
EDH-EAT-00170	KPRL3XBA12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	347
EDH-EAT-00171	KPRL3XBA12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	348
EDH-EAT-00172	KPRL3XBA18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	349
EDH-EAT-00173	KPRL3XBA18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	350
EDH-EAT-00174	KPRL3XBA24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	351
EDH-EAT-00175	KPRL3XBA24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	352
EDH-EAT-00176	KPRL3XGB06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	353
EDH-EAT-00177	KPRL3XGB06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	354
EDH-EAT-00178	KPRL3XGB12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	355
EDH-EAT-00179	KPRL3XGB12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	356
EDH-EAT-00180	KPRL3XGB18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	357
EDH-EAT-00181	KPRL3XGB18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	358
EDH-EAT-00182	KPRL3XGB24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	359
EDH-EAT-00183	KPRL3XGB24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	360
EDH-EAT-00331	KPRL44X	30-100A	Three-phase	—	421
EDH-EAT-00333	KPRL45X	100A	Three-phase	—	422
EDH-EAT-00334	KPRL45XS	100A	Three-phase	—	423
EDH-EAT-00308	KPRL4CA	225 A	2, 3	—	434
EDH-EAT-00784	KPRL4CD	225 A max	—	—	112
EDH-EAT-00783	KPRL4CED	225 A max	—	—	112
EDH-EAT-00322	KPRL4CKD	400A	2, 3	—	435
EDH-EAT-00324	KPRL4CND	1200A	3	—	436
EDH-EAT-00785	KPRL4CSL	600 A max	—	—	112
EDH-EAT-00786	KPRL4CSM	800 A max	—	—	113
EDH-EAT-00787	KPRL4CSN	1200 A max	—	—	113
EDH-EAT-00329	KPRL4ED	225 A	3	—	437
EDH-EAT-00327	KPRL4ED2	225 A	2	—	438

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00311	KPRL4FBP	100A	3	—	439
EDH-EAT-00328	KPRL4FD	225 A	3	—	441
EDH-EAT-00325	KPRL4FD1	225 A	1 (two sets of twin-mounted single-pole)	—	442
EDH-EAT-00326	KPRL4FD2	225 A	2	—	443
EDH-EAT-00307	KPRL4FDCL	—	3	—	444
EDH-EAT-00309	KPRL4JDS	250 A	2, 3	—	445
EDH-EAT-00310	KPRL4JDT	250 A	2, 3	—	446
EDH-EAT-00312	KPRL4KDS	400A	2, 3	—	447
EDH-EAT-00313	KPRL4KDT	400A	2, 3	—	448
EDH-EAT-00317	KPRL4LAP	400A	2, 3	—	449
EDH-EAT-00314	KPRL4LC	600A	3	—	450
EDH-EAT-00318	KPRL4LCL	600A	2, 3	—	451
EDH-EAT-00330	KPRL4LD	600A	2, 3	—	452
EDH-EAT-00315	KPRL4LG	600A	3	—	454
EDH-EAT-00316	KPRL4MC	800A	2, 3	—	455
EDH-EAT-00323	KPRL4MD	—	3	—	456
EDH-EAT-00319	KPRL4NBP	800A	2, 3	—	456
EDH-EAT-00320	KPRL4NC	—	3	—	457
EDH-EAT-00321	KPRL4ND	1200A	2, 3	—	458
EDH-EAT-00338	KPRL4W11X	600-800A	Three-phase	—	424
EDH-EAT-00337	KPRL4W9X	400A	Three-phase	—	426
EDH-EAT-00299	KPRL4X12	—	1 (two sets of twin-mounted single-pole)	—	459
EDH-EAT-00300	KPRL4X22	—	2	—	460
EDH-EAT-00301	KPRL4X32	—	3	—	461
EDH-EAT-00302	KPRL4X334S	—	3	—	462
EDH-EAT-00303	KPRL4X334T	—	3	—	462
EDH-EAT-00304	KPRL4X336	—	3	—	463
EDH-EAT-00305	KPRL4X34	—	3	—	464
EDH-EAT-00306	KPRL4X35	—	3	—	465
EDH-EAT-00560	L3RTWK	—	3	—	695
EDH-EAT-00561	L4RTWK	—	4	—	696
EDH-EAT-00564	LGTES3	—	3	—	697
EDH-EAT-00565	LGTES4	—	4	—	698
EDH-EAT-00562	LGTEW3	—	3	—	699
EDH-EAT-00563	LGTEW4	—	4	—	700
EDH-EAT-00558	LTS3K	—	3	—	693
EDH-EAT-00559	LTS4K	—	4	—	694
EDH-EAT-00984	M50ASB324R	200 A	—	250 V	132
EDH-EAT-00985	M50ASB364R	200 A	—	600 V	132
EDH-EAT-00986	M50ASW325R	400 A	—	250 V	133
EDH-EAT-00988	M50ASW326R	600 A	—	250 V	133
EDH-EAT-00987	M50ASW365R	400 A	—	600 V	133
EDH-EAT-00989	M50ASW366R	600 A	—	600 V	134
EDH-EAT-00991	M50ASW367B	800 A	—	600 V (bottom mounted)	134
EDH-EAT-00990	M50ASW367T	800 A	—	600 V (top mounted)	135
EDH-EAT-00993	M50ASW368B	1200 A	—	600 V (bottom mounted)	135
EDH-EAT-00992	M50ASW368T	1200 A	—	600 V (top mounted)	136
EDH-EAT-00978	M50ATW3211R	30/30 A	—	250 V	136
EDH-EAT-00980	M50ATW3222R	60/60 A	—	250 V	136

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00982	M50ATW3233R	100/100 A	—	250 V	137
EDH-EAT-00979	M50ATW3611R	30/30 A	—	600 V	137
EDH-EAT-00981	M50ATW3622R	60/60 A	—	600 V	137
EDH-EAT-00983	M50ATW3633R	100/100 A	—	600 V	138
EDH-EAT-00896	MP40CHH	225 A maximum	—	—	139
EDH-EAT-00889	MP40ED225-3	225 A maximum	—	—	140
EDH-EAT-00972	MP40KC225-2	225 A maximum	2	—	140
EDH-EAT-00888	MP40KC225-3	225 A maximum	3	—	75
EDH-EAT-00973	MP40KCHH225-2	225 A maximum	2	—	141
EDH-EAT-00974	MP40KCHH225-3	225 A maximum	3	—	141
EDH-EAT-00969	MP40KF100-2	100 A maximum	2	—	142
EDH-EAT-00887	MP40KF100-3	100 A maximum	3	—	76
EDH-EAT-00970	MP40KF225-2	225 A maximum	2	—	142
EDH-EAT-00971	MP40KF225-3	225 A maximum	3	—	143
EDH-EAT-00890	MP40KJ225-3	250 A maximum	3	—	77
EDH-EAT-00891	MP40KK400-3	400 A maximum	3	—	77
EDH-EAT-00892	MP40KL400-3	400 A maximum	—	—	143
EDH-EAT-00893	MP40KL600-3	600 A maximum	3	—	78
EDH-EAT-00975	MP40KLL400-3	400 A maximum	3	—	144
EDH-EAT-00894	MP40KM800-3	800 A maximum	3	—	79
EDH-EAT-00895	MP40KN1200-3	1200 A maximum	3	—	80
EDH-EAT-00898	MPED1K	225 A	—	600 V	144
EDH-EAT-00457	NL300	225 A; Bus material; Aluminum	—	—	27
EDH-EAT-00940	PH2CC1	—	2	—	157
EDH-EAT-00942	PH3CC3	—	3	—	158
EDH-EAT-00941	PH6E-3	—	6	—	158
EDH-EAT-00297	PRXP4PD2FILL1	—	1	—	506
EDH-EAT-00764	RAABR10BXXX	60-125 A	—	—	39
EDH-EAT-00765	RAABR10BXXXA	60-125 A	—	—	39
EDH-EAT-00762	RAABR12L125	125 A	—	—	39
EDH-EAT-00763	RAABR12L125A	125 A	—	—	40
EDH-EAT-00748	RABR12B3XXX	60-100 A, 10K AIC	—	3-ph 240	41
EDH-EAT-00749	RABR12H3XXX	60-100 A, 22K AIC	—	3-ph 240	42
EDH-EAT-00756	RABR12L3125	125 A	—	3-ph 240	42
EDH-EAT-00737	RABR20BXXX	60-125 A, 10K AIC	—	1-ph 120/240	43
EDH-EAT-00738	RABR20HXXX	60-125 A, 22K AIC	—	1-ph 120/240	43
EDH-EAT-00744	RABR20L125	125 A	—	1-ph 120/240	43
EDH-EAT-00722	RACH18B3XXX	60-125 A, 10K AIC	—	3-ph 240	45
EDH-EAT-00706	RACH22BXXX	60-125 A, 10K AIC	—	1-ph 120/240	45
EDH-EAT-00712	RACH24L125	125 A	—	1-ph 120/240	46
EDH-EAT-01232	RACH24L125I	125 A; Main circuit breaker; CH	—	—	32
EDH-EAT-00725	RACH24L3125	125 A	—	3-ph 240	46
EDH-EAT-00726	RACH30L3125	125 A	—	3-ph 240	47
EDH-EAT-00727	RACH30L3225	150-225 (chart rows 150 A 22.5-30 in #4-1/0 and 225 A 24.5-30 in #4-4/0 share this number) A	—	3-ph 240	47
EDH-EAT-00741	RBBR20BXXX	100-200 A, 25K AIC	—	1-ph 120/240	48
EDH-EAT-00758	RBBR24L3150	150 A	—	3-ph 240	48
EDH-EAT-00739	RBBR30BCXXX	60-125 A, 10K AIC	—	1-ph 120/240	49
EDH-EAT-00750	RBBR30BXXX	60-100 A, 10K AIC	—	3-ph 240	49
EDH-EAT-00751	RBBR30H3XXX	60-100 A, 22K AIC	—	3-ph 240	50
EDH-EAT-00740	RBBR30HCXXX	60-125 A, 22K AIC	—	1-ph 120/240	50
EDH-EAT-00745	RBBR30L200	200 A	—	1-ph 120/240	51

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00757	RBBR30L3100	100 A	—	3-ph 240	51
EDH-EAT-00708	RBCH24BXXX	100-200 A, 35K AIC	—	1-ph 120/240	52
EDH-EAT-00718	RBCH24D225	225 A	—	1-ph 120/240	52
EDH-EAT-00733	RBCH24D3225	225 A	—	3-ph 240	53
EDH-EAT-00707	RBCH30BXXX	60-125 A, 10K AIC	—	1-ph 120/240	53
EDH-EAT-00734	RBCH30D3225	225 A	—	3-ph 240	54
EDH-EAT-00728	RBCH30L3225	225 A	—	3-ph 240	54
EDH-EAT-00719	RBCH32D225	225 A	—	1-ph 120/240	54
EDH-EAT-00714	RBCH32L225	225 A	—	1-ph 120/240	55
EDH-EAT-00713	RBCH42L125	125 A	—	1-ph 120/240	56
EDH-EAT-00715	RBCH42L225	225 A	—	1-ph 120/240	56
EDH-EAT-00729	RBCH42L3125	125 A	—	3-ph 240	57
EDH-EAT-00730	RBCH42L3225	225 A	—	3-ph 240	57
EDH-EAT-00742	RCBR30BXXX	100-200 A, 25K AIC	—	1-ph 120/240	58
EDH-EAT-00759	RCBR30L3200	200 A	—	3-ph 240	58
EDH-EAT-00746	RCBR40L200	200 A	—	1-ph 120/240	59
EDH-EAT-00735	RCCH30D3225	225 A	—	3-ph 240	59
EDH-EAT-00709	RCCH32BXXX	100-225 A, 35K AIC	—	1-ph 120/240	60
EDH-EAT-00720	RCCH32D225	225 A	—	1-ph 120/240	60
EDH-EAT-00716	RCCH42L225	225 A	—	1-ph 120/240	61
EDH-EAT-00731	RCCH42L3225	225 A	—	3-ph 240	61
EDH-EAT-00752	RDBR30B3XXX	100-200 A, 10K AIC	—	3-ph 240	62
EDH-EAT-00753	RDBR30H3XXX	100-200 A, 100K AIC	—	3-ph 240	62
EDH-EAT-00743	RDBR40BXXX	100-200 A, 25K AIC	—	1-ph 120/240	63
EDH-EAT-00747	RDBR42L225	225 A	—	1-ph 120/240	63
EDH-EAT-00760	RDBR42L3225	225 A	—	3-ph 240	64
EDH-EAT-01233	RDCH42B200I	200 A; Main circuit breaker; CH	—	—	33
EDH-EAT-00723	RDCH42B3XXX	100-225 A, 10K AIC	—	3-ph 240	64
EDH-EAT-00710	RDCH42BXXX	100-225 A, 35K AIC	—	1-ph 120/240	65
EDH-EAT-00721	RDCH42D225	225 A	—	1-ph 120/240	65
EDH-EAT-00736	RDCH42D3225	225 A	—	3-ph 240	66
EDH-EAT-00724	RDCH42H3XXX	100-225 A, 100K AIC	—	3-ph 240	66
EDH-EAT-00711	RDCH42HXXX	100-225 A, 100K AIC	—	1-ph 120/240	67
EDH-EAT-00717	RDCH42L225	225 A	—	1-ph 120/240	67
EDH-EAT-00732	RDCH42L3225	225 A	—	3-ph 240	68
EDH-EAT-01234	RDCHFRAME	225 A; Bus material; Aluminum; Main circuit breaker; CH	—	—	36
EDH-EAT-00754	REBR42B3XXX	100-225 A, 10K AIC	—	3-ph 240	68
EDH-EAT-00755	REBR42H3XXX	100-225 A, 100K AIC	—	3-ph 240	69
EDH-EAT-00761	REBR42L3225	225 A	—	3-ph 240	69
EDH-EAT-01236	RTBR10B100Q	100 A	—	—	34
EDH-EAT-01235	RTBR12L125R	125 A	—	—	35
EDH-EAT-00527	T1000NB1	1000 A max breaker	—	—	643
EDH-EAT-00528	T1200NB3	1200 A max breaker	—	—	644
EDH-EAT-00529	T1200NB3M	1250 A	—	—	700
EDH-EAT-00531	T1600RD	1600 A max breaker	—	—	655
EDH-EAT-00541	T250FJ	250 A	—	—	674
EDH-EAT-00471	T250KB	250 A	—	—	560
EDH-EAT-00477	T300K	225 A max breaker	—	—	591
EDH-EAT-00478	T350K	350 A max breaker	—	—	592
EDH-EAT-00552	T350LK	400 A max breaker	—	—	691
EDH-EAT-00517	T600MA1	600 A max breaker	—	—	629

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00508	T602LD	600 A max breaker	—	—	615
EDH-EAT-00513	T602LDCW	600 A	—	—	616
EDH-EAT-00526	T700NB1	700 A max breaker	—	—	645
EDH-EAT-00518	T800MA1	800 A max breaker	—	—	629
EDH-EAT-00523	TA1000NB1	1000 A max breaker	—	—	645
EDH-EAT-00524	TA1200NB1	1200 A max breaker	—	—	646
EDH-EAT-00525	TA1201NB1	1200 A max breaker	—	—	647
EDH-EAT-00530	TA1600RD	1600 A max breaker	—	—	656
EDH-EAT-00532	TA2000RD	2000 A max breaker	—	—	657
EDH-EAT-00542	TA250FJ	250 A	—	—	674
EDH-EAT-00470	TA250KB	250 A	—	—	561
EDH-EAT-00472	TA300K	225 A max breaker	—	—	592
EDH-EAT-00473	TA350K	350 A max breaker	—	—	593
EDH-EAT-00551	TA350LK	400 A max breaker	—	—	692
EDH-EAT-00503	TA450LD	450 A max breaker	—	—	617
EDH-EAT-00504	TA602LD	500 A max breaker	—	—	618
EDH-EAT-00509	TA602LDCW	500 A	—	—	619
EDH-EAT-00553	TA632L	630 A	—	—	692
EDH-EAT-00514	TA700MA1	600 (700 per KM/DC table) A max breaker	—	—	630
EDH-EAT-00522	TA700NB1	700 A max breaker	—	—	648
EDH-EAT-00515	TA800MA2	800 (std.) A max breaker	—	—	631
EDH-EAT-00520	TA800MA2CWT	800 A	—	—	632
EDH-EAT-00516	TA801MA	800 A max breaker	—	—	632
EDH-EAT-00521	TA801MACWT	800 A	—	—	633
EDH-EAT-00641	TS33LD	—	3	—	597
EDH-EAT-00639	TS33LN	—	2,3	—	598
EDH-EAT-00640	TS34LN	—	4	—	598
EDH-FPE-00007	KBDP1C	100 A	—	240 V (Superbreakers)	1850
EDH-FPE-00008	KBDP2C	225 A	—	600 V	1850
EDH-FPE-00010	KBDP4C	400 A max (per NJL3K)	—	—	1851
EDH-FPE-00001	KCDP1C	100 A max (per NEF1K listing)	—	600 V	1855
EDH-FPE-00002	KCDP2C	225 A max (per NEJ1K listing)	—	600 V	1856
EDH-FPE-00003	KCDP3C	225 A max (per NFJ1K listing)	—	—	1856
EDH-FPE-00004	KCDP4C	400 A max (per NJL1K listing)	—	—	1857
EDH-FPE-00005	KCDP5C	225 A (Superbreakers tag - doubtful for NM/NN frames)	—	600 V	1857
EDH-FPE-00018	KFDP46C	400 A, 600 V	—	—	1860
EDH-FPE-00017	KFDP4C	200 A, 600 V; single branch mounting; for QMQB R-style panelboard switches	—	—	1860
EDH-FPE-00019	KFDP66C	600 A, 600 V	—	—	1861
EDH-FPE-00020	KFDP7C	1200 A, 600 V	—	—	1861
EDH-FPE-00021	KFDPD16C	100 A, 600 V	—	—	1861
EDH-FPE-00022	KFDPS16C	100 A, 600 V	—	—	1862
EDH-FPE-00025	KFDPV7C	1200 A, 600 V	—	—	1863
EDH-FPE-00013	NDPNE	100 A / 240 V per search snippet of relectric NDPNE page	—	—	1868
EDH-FPE-00012	NDPNEJ	225 A max	—	600 V max	1868
EDH-GEA-00580	121B7147P1	Used singly for 400 A mains and in pairs for 600 A mains	—	—	1152
EDH-GEA-00027	315A7049P10	200 A (per description)	—	—	1105
EDH-GEA-00834	331A1519G10	100 A	3	—	1362
EDH-GEA-00837	331A1519G11	200 A	3	—	1362
EDH-GEA-00838	331A1519G13	200 A	2	—	1363

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00835	331A1519G14	100 A	3	—	1363
EDH-GEA-00839	331A1519G15	200 A	2	—	1363
EDH-GEA-00840	331A1519G17	200 A	2	—	1364
EDH-GEA-00836	331A1519G18	100 A	2	—	1364
EDH-GEA-00841	331A1519G19	200 A	3	—	1365
EDH-GEA-00842	331A1519G21	200 A	2	—	1365
EDH-GEA-00833	331A1519G9	100 A	2	—	1367
EDH-GEA-00851	331A1543G1	400-1200 A	—	—	1368
EDH-GEA-00843	331A1545G1	400 A	2	—	1368
EDH-GEA-00847	331A1545G2	600 A	2	—	1368
EDH-GEA-00844	331A1545G3	400 A	3	—	1369
EDH-GEA-00848	331A1545G4	600 A	3	—	1369
EDH-GEA-00845	331A1545G5	400 A	2	—	1369
EDH-GEA-00849	331A1545G6	600 A	2	—	1370
EDH-GEA-00846	331A1545G7	400 A	3	—	1370
EDH-GEA-00850	331A1545G8	600 A	3	—	1370
EDH-GEA-00781	565B837G1	100 A	3	—	1388
EDH-GEA-00782	565B837G2	100 A	2	—	1389
EDH-GEA-00779	571B595DDG1	70 A	2	—	1389
EDH-GEA-00780	571B595DDG2	70 A	3	—	1389
EDH-GEA-00577	75C140045G705	100 A or 225 A row (ambiguous)	—	—	1152
EDH-GEA-00905	ACSFPKSG	400, 800 A max	—	—	1169
EDH-GEA-00907	ACSFPKSK	800, 1200 A max	—	—	1169
EDH-GEA-00909	ACSFPKTB4	400 A max	—	—	1169
EDH-GEA-00904	ACSHKSG	400, 800 A max	—	—	1181
EDH-GEA-00906	ACSHKSK	800, 1200 A max	—	—	1182
EDH-GEA-00908	ACSHKTB4	400 A max	—	—	1182
EDH-GEA-00254	ACSMKSG	400/800 A max	—	—	1164
EDH-GEA-00255	ACSMKSK	800/1200 A max	—	—	1164
EDH-GEA-00889	ACTFPKEB1P	150 A max	—	—	1169
EDH-GEA-00891	ACTFPKEB2P	150 A max	—	—	1170
EDH-GEA-00893	ACTFPKEB3P	150 A max	—	—	1170
EDH-GEA-00901	ACTFPKJD	400 A max	—	—	1170
EDH-GEA-00897	ACTFPKQD2P	225 A max	—	—	1170
EDH-GEA-00899	ACTFPKQD3P	225 A max	—	—	1171
EDH-GEA-00887	ACTFPKSE	150 A max	—	—	1171
EDH-GEA-00895	ACTFPKSF	250 A max	—	—	1171
EDH-GEA-00903	ACTFPKSG	400, 600 A max	—	—	1171
EDH-GEA-00888	ACTHKEB1P	150 A max	—	—	1182
EDH-GEA-00890	ACTHKEB2P	150 A max	—	—	1182
EDH-GEA-00892	ACTHKEB3P	150 A max	—	—	1182
EDH-GEA-00900	ACTHKJD	400 A max	—	—	1183
EDH-GEA-00896	ACTHKQD2P	225 A max	—	—	1183
EDH-GEA-00898	ACTHKQD3P	225 A max	—	—	1183
EDH-GEA-00886	ACTHKSE	150 A max	—	—	1183
EDH-GEA-00894	ACTHKSF	250 A max	—	—	1183
EDH-GEA-00902	ACTHKSG	400, 600 A max	—	—	1184
EDH-GEA-00246	ACTMKEB1P	150 A max	—	—	1165
EDH-GEA-00247	ACTMKEB2P	150 A max	—	—	1166
EDH-GEA-00248	ACTMKEB3P	150 A max	—	—	1166
EDH-GEA-00252	ACTMKJD	400 A max	—	—	1166
EDH-GEA-00250	ACTMKQD2P	225 A max	—	—	1167

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00251	ACTMKQD3P	225 A max	—	—	1167
EDH-GEA-00245	ACTMKSE	150 A max	—	—	1167
EDH-GEA-00249	ACTMKSF	250 A max	—	—	1168
EDH-GEA-00253	ACTMKSG	400/600 A max	—	—	1168
EDH-GEA-00243	AFL120	800/1200 A	—	—	1205
EDH-GEA-00242	AFL600	250/400/600 A	—	—	1206
EDH-GEA-00530	AMB2120CA	1200 A	2	—	1186
EDH-GEA-00538	AMB2120DCA	1200 A	2	—	1186
EDH-GEA-00518	AMB2120DMA	1200 A	2	—	1187
EDH-GEA-00516	AMB2120DMC	1200 A	2	—	1187
EDH-GEA-00522	AMB2120DN	1200 A	2	—	1188
EDH-GEA-00513	AMB2120MA	1200 A	2	—	1188
EDH-GEA-00520	AMB2120N	1200 A	2	—	1189
EDH-GEA-00524	AMB2250CA	250 A	2	—	1189
EDH-GEA-00532	AMB2250DCA	250 A	2	—	1190
EDH-GEA-00526	AMB2600CA	600 A	2	—	1190
EDH-GEA-00534	AMB2600DCA	600 A	2	—	1191
EDH-GEA-00509	AMB2600MA	600 A	2	—	1191
EDH-GEA-00511	AMB2600MC	600 A	2	—	1192
EDH-GEA-00528	AMB2800CA	800 A	2	—	1192
EDH-GEA-00536	AMB2800DCA	800 A	2	—	1193
EDH-GEA-00531	AMB3120CA	1200 A	3	—	1193
EDH-GEA-00539	AMB3120DCA	1200 A	3	—	1194
EDH-GEA-00519	AMB3120DMA	1200 A	3	—	1194
EDH-GEA-00517	AMB3120DMC	1200 A	3	—	1195
EDH-GEA-00523	AMB3120DN	1200 A	3	—	1195
EDH-GEA-00514	AMB3120MA	1200 A	3	—	1196
EDH-GEA-00515	AMB3120MC	1200 A	3	—	1196
EDH-GEA-00521	AMB3120N	1200 A	3	—	1197
EDH-GEA-00525	AMB3250CA	250 A	3	—	1197
EDH-GEA-00533	AMB3250DCA	250 A	3	—	1198
EDH-GEA-00527	AMB3600CA	600 A	3	—	1198
EDH-GEA-00535	AMB3600DCA	600 A	3	—	1199
EDH-GEA-00510	AMB3600MA	600 A	3	—	1199
EDH-GEA-00512	AMB3600MC	600 A	3	—	1200
EDH-GEA-00529	AMB3800CA	800 A	3	—	1200
EDH-GEA-00537	AMB3800DCA	800 A	3	—	1201
EDH-GEA-00181	AMC2FGMFP	600 A max breaker	—	—	1250
EDH-GEA-00179	AMC2FJFP	250 A max breaker	—	—	1250
EDH-GEA-00178	AMC2FJFPTF	225 A max breaker	—	—	1251
EDH-GEA-00184	AMC2FLSFP	250 A max breaker	—	—	1252
EDH-GEA-00182	AMC2GMFP	600 A max breaker	—	—	1253
EDH-GEA-00180	AMC2JKFP	400/600 A max breaker	—	—	1254
EDH-GEA-00183	AMC2KMFP	1200 A max breaker	—	—	1254
EDH-GEA-00162	AMC3FGMFP	600 A max breaker	—	—	1256
EDH-GEA-00160	AMC3FJFP	250 A max breaker	—	—	1256
EDH-GEA-00159	AMC3FJFPTF	225 A max breaker	—	—	1257
EDH-GEA-00165	AMC3FLSFP	250 A max breaker	—	—	1258
EDH-GEA-00163	AMC3GMFP	600 A max breaker	—	—	1258
EDH-GEA-00161	AMC3JKFP	400/600 A max breaker	—	—	1259
EDH-GEA-00164	AMC3KMFP	1200 A max breaker	—	—	1260
EDH-GEA-00167	AMC4EBFP	150 A max breaker	—	—	1261

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00176	AMC4EBSFP	150 A max breaker	—	—	1262
EDH-GEA-00166	AMC4FDBFP	100 A max breaker	—	—	1263
EDH-GEA-00175	AMC4FDSFP	100 A max breaker	—	—	1263
EDH-GEA-00173	AMC4FGBFP	600 A max breaker	—	—	1264
EDH-GEA-00171	AMC4FJFP	250 A max breaker	—	—	1264
EDH-GEA-00170	AMC4FJFPTF	225 A max breaker	—	—	1265
EDH-GEA-00177	AMC4FLSFP	250 A max breaker	—	—	1266
EDH-GEA-00174	AMC4GBFP	600 A max breaker	—	—	1267
EDH-GEA-00172	AMC4JKFP	400/600 A max breaker	—	—	1267
EDH-GEA-00169	AMC4QDFP	225 A max breaker	—	—	1268
EDH-GEA-00168	AMC4SEFP	150 A max breaker	—	—	1269
EDH-GEA-00149	AMC6EBFP	150 A max breaker	—	—	1270
EDH-GEA-00157	AMC6EBSFP	150 A max breaker	—	—	1271
EDH-GEA-00146	AMC6EYFP	100 A max breaker	—	—	1272
EDH-GEA-00147	AMC6FBFP	100 A max breaker	—	—	1273
EDH-GEA-00148	AMC6FDBFP	100 A max breaker	—	—	1274
EDH-GEA-00156	AMC6FDSPF	100 A max breaker	—	—	1274
EDH-GEA-00154	AMC6FGBFP	600 A max breaker	—	—	1275
EDH-GEA-00152	AMC6FJFP	250 A max breaker	—	—	1275
EDH-GEA-00151	AMC6FJFPTF	225 A max breaker	—	—	1276
EDH-GEA-00158	AMC6FLSFP	250 A max breaker	—	—	1277
EDH-GEA-00155	AMC6GBFP	600 A max breaker	—	—	1277
EDH-GEA-00153	AMC6JKFP	400/600 A max breaker	—	—	1278
EDH-GEA-00145	AMC6QBFP	100 A max breaker	—	—	1279
EDH-GEA-00150	AMC6QDFP	225 A max breaker	—	—	1280
EDH-GEA-00119	AMCB2FGMFP	—	2	—	1217
EDH-GEA-00401	AMCB2FJ	—	2 (configurations per Table 3)	—	1218
EDH-GEA-00117	AMCB2FJFP	—	2	—	1219
EDH-GEA-00118	AMCB2FJFPTF	—	2	—	1219
EDH-GEA-00403	AMCB2GM	—	2 (A&C or A&B locations)	—	1220
EDH-GEA-00120	AMCB2GMFP	—	2	—	1221
EDH-GEA-00407	AMCB2KM	—	2	—	1221
EDH-GEA-00126	AMCB2KMFP	—	2	—	1222
EDH-GEA-00123	AMCB3FGMFP	—	3	—	1222
EDH-GEA-00400	AMCB3FJ	—	3	—	1223
EDH-GEA-00121	AMCB3FJFP	—	3	—	1223
EDH-GEA-00122	AMCB3FJFPTF	—	3	—	1224
EDH-GEA-00404	AMCB3GM	—	3	—	1224
EDH-GEA-00124	AMCB3GMFP	—	3	—	1225
EDH-GEA-00408	AMCB3KM	—	3	—	1226
EDH-GEA-00127	AMCB3KMFP	—	3	—	1226
EDH-GEA-00125	AMCB3LBFP	—	2	—	1227
EDH-GEA-00398	AMCB4EB	—	1- or 2-pole configurations per Table 2; alternate 2X bracket for 4-pole 2X double-branch TEB/TED	—	1228
EDH-GEA-00098	AMCB4EBFP	—	2	—	1229

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00409	AMCB4EY	—	1- or 2-pole configurations (Table 2)	—	1229
EDH-GEA-00099	AMCB4EYFP	—	2	—	1230
EDH-GEA-00100	AMCB4FBFP	—	2	—	1230
EDH-GEA-00101	AMCB4FDBFP	—	2	—	1231
EDH-GEA-00113	AMCB4FGBFP	—	2	—	1231
EDH-GEA-00402	AMCB4FJ	—	2 (configurations per Table 3)	—	1232
EDH-GEA-00109	AMCB4FJFP	—	2	—	1233
EDH-GEA-00111	AMCB4FJFPTF	—	2	—	1233
EDH-GEA-00405	AMCB4GB	—	2 (A-B, A-C or B-C)	—	1234
EDH-GEA-00114	AMCB4GBFP	—	2	—	1235
EDH-GEA-00102	AMCB4QDFP	—	2	—	1235
EDH-GEA-00397	AMCB4SE	—	1/2-pole configurations per DEH047 Table 2	—	1236
EDH-GEA-00103	AMCB4SEFP	—	2	—	1237
EDH-GEA-00396	AMCB6EB	—	3 (three-phase, double-branch)	—	1238
EDH-GEA-00104	AMCB6EBFP	—	3	—	1238
EDH-GEA-00410	AMCB6EY	—	3	—	1239
EDH-GEA-00105	AMCB6EYFP	—	3	—	1239
EDH-GEA-00106	AMCB6FBFP	—	3	—	1240
EDH-GEA-00107	AMCB6FDBFP	—	3	—	1241
EDH-GEA-00115	AMCB6FGBFP	—	3	—	1241
EDH-GEA-00399	AMCB6FJ	—	3	—	1242
EDH-GEA-00110	AMCB6FJFP	—	3	—	1242
EDH-GEA-00112	AMCB6FJFPTF	—	3	—	1243
EDH-GEA-00406	AMCB6GB	—	3	—	1243
EDH-GEA-00116	AMCB6GBFP	—	3	—	1244
EDH-GEA-00108	AMCB6QDFP	—	3	—	1245
EDH-GEA-00231	AML3120CFP	1200 A	—	—	1201
EDH-GEA-00226	AML3120FP	1200 A	—	—	1201
EDH-GEA-00227	AML3250CFP	250 A	—	—	1202
EDH-GEA-00220	AML3250FP	250 A	—	—	1202
EDH-GEA-00219	AML3250SFP	250 A	—	—	1202
EDH-GEA-00228	AML3400CFP	400 A	—	—	1203
EDH-GEA-00222	AML3400FP	400 A	—	—	1203
EDH-GEA-00221	AML3400SFP	400 A	—	—	1203
EDH-GEA-00229	AML3600CFP	600 A	—	—	1204
EDH-GEA-00224	AML3600FP	600 A	—	—	1204
EDH-GEA-00223	AML3600SFP	600 A	—	—	1204
EDH-GEA-00230	AML3800CFP	800 A	—	—	1205
EDH-GEA-00225	AML3800FP	800 A	—	—	1205
EDH-GEA-00235	ANK120D	1200 A	—	—	1282
EDH-GEA-00234	ANK800D	800 A	—	—	1282
EDH-GEA-00233	ANKN120	600-1200 A	—	—	1282
EDH-GEA-00232	ANKN400	250/400 A	—	—	1283
EDH-GEA-00369	FCAL12	15-20 A	—	—	1425
EDH-GEA-00371	FCAL13	25-60 A	—	—	1425
EDH-GEA-00373	FCAL14	70-100 A	—	—	1425

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00375	FCAL15	150 A	—	—	1432
EDH-GEA-00378	FCAL16	250 A	—	—	1432
EDH-GEA-00370	FCALK12	15-20 A	—	—	1424
EDH-GEA-00372	FCALK13	25-60 A	—	—	1424
EDH-GEA-00374	FCALK14	70-100 A	—	—	1424
EDH-GEA-00376	FCALK15	150 A	—	—	1431
EDH-GEA-00377	FCALK15LV	150 A	—	—	1431
EDH-GEA-00379	FCALK16	250 A	—	—	1431
EDH-GEA-00380	FCALK16LV	250 A	—	—	1432
EDH-GEA-00381	FCALK218H	—	2	—	1434
EDH-GEA-00382	FCALK318H	—	3	—	1435
EDH-GEA-00796	FCDDF1	100 A	—	—	1426
EDH-GEA-00797	FCDDF2	100 A	—	—	1427
EDH-GEA-00798	FCDDF3	100 A	—	—	1427
EDH-GEA-00799	FCDDF4	100 A	—	—	1428
EDH-GEA-00059	MB133	150 A	3	—	1055
EDH-GEA-00060	MB133WB	150 A	3	—	1055
EDH-GEA-00051	MB233	225 A	3	—	1056
EDH-GEA-00053	MB2332	400 A	6	—	1056
EDH-GEA-00054	MB2332WB	400 A	6	—	1056
EDH-GEA-00052	MB233WB	225 A	3	—	1057
EDH-GEA-00045	MB332	400/600 A	2	—	1057
EDH-GEA-00046	MB332WB	600 A	2	—	1057
EDH-GEA-00055	MB333	400/600 A	3	—	1058
EDH-GEA-00056	MB333WB	600 A	3	—	1058
EDH-GEA-00057	MB423	100 A	3	—	1058
EDH-GEA-00058	MB426	100 A	6	—	1059
EDH-GEA-00044	MB512	225 A	2	—	1059
EDH-GEA-00049	MB513	225 A	3	—	1059
EDH-GEA-00050	MB516	400 A	6	—	1060
EDH-GEA-00042	MB612	100 A	2	—	1060
EDH-GEA-00047	MB613	100 A	3	—	1060
EDH-GEA-00043	MB614	100 A	4	—	1061
EDH-GEA-00048	MB616	100 A	6	—	1061
EDH-GEA-00061	MLA1	225 A	—	—	1062
EDH-GEA-00062	MLA2	225 A	—	—	1062
EDH-GEA-00063	MLA41	400 A	—	—	1062
EDH-GEA-00064	MLA61	600 A	—	—	1063
EDH-GEA-00065	MLA62	400/600 A	—	—	1063
EDH-GEA-00066	MLR1	225 A	—	—	1063
EDH-GEA-00067	MLR2	225 A	—	—	1063
EDH-GEA-00068	MLR41	400 A	—	—	1064
EDH-GEA-00069	MLR61	400/600 A	—	—	1064
EDH-GEA-00070	MLT1	225 A	—	—	1064
EDH-GEA-00071	MLT2	225 A	—	—	1064
EDH-GEA-00073	MLT41	400 A	—	—	1065
EDH-GEA-00072	MLT42	400 A	—	—	1065
EDH-GEA-00074	NKA	225 A	—	—	1067
EDH-GEA-00075	NKA42	400 A	—	—	1067
EDH-GEA-00080	NKA4FT	400 A	—	—	1067
EDH-GEA-00076	NKR	225 A	—	—	1067
EDH-GEA-00077	NKR4	400 A	—	—	1067

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00078	NKT	225 A	—	—	1068
EDH-GEA-00079	NKT4	400 A	—	—	1068
EDH-GEA-00262	SF2DPK	225 A	—	—	1115
EDH-GEA-00604	SG6DPK	600 A	—	—	1116
EDH-GEA-00605	SG6SPK	600 A	—	—	1372
EDH-GEA-00606	SGS6K	600 A	—	—	1372
EDH-GEA-00266	SK12SPK	1200 A	—	—	1116
EDH-GEA-00265	SK8SPK	800 A	—	—	1116
EDH-GEA-00591	TB1DPK	100 A max (spec) / 15-150 A (title)	—	—	1117
EDH-GEA-00954	TB1SPK	100 A	—	—	1117
EDH-GEA-00593	TB4SBK	400 A	—	—	1117
EDH-GEA-00592	TB4SPK	400 A	—	—	1117
EDH-GEA-00955	TB6SPK	600 A	—	—	1118
EDH-GEA-00594	TB8SPK	800 A	—	—	1118
EDH-GEA-00354	TC018	15-150 A	—	—	1437
EDH-GEA-00284	TCAL12	15-60 A	—	—	1375
EDH-GEA-00341	TCAL124	Cu 275-1200 A / Al 225-1100 A	—	—	1447
EDH-GEA-00344	TCAL125	600-1200 A	—	—	1448
EDH-GEA-00285	TCAL12A	70-90 A	—	—	1375
EDH-GEA-00283	TCAL14	15-30 A	—	—	1376
EDH-GEA-00286	TCAL15	100-150 A	—	—	1376
EDH-GEA-00335	TCAL18	15-150 A	—	—	1437
EDH-GEA-00360	TCAL18LV	15-150 A	—	—	1437
EDH-GEA-00363	TCAL19PD1	125 A max	—	—	1438
EDH-GEA-00364	TCAL19PD3	125 A max	—	—	1436
EDH-GEA-00365	TCAL28PD1	250 A max	—	—	1440
EDH-GEA-00366	TCAL28PD3	250 A max	—	—	1439
EDH-GEA-00337	TCAL29	70-250 A	—	—	1440
EDH-GEA-00361	TCAL29LV	70-250 A	—	—	1440
EDH-GEA-00367	TCAL40PD1	400 A max	—	—	1444
EDH-GEA-00368	TCAL40PD3	400 A max	—	—	1442
EDH-GEA-00308	TCAL81	300-800 A (SK1200 table)	—	—	1414
EDH-GEA-00342	TCALK2124	Cu 275-1200 A / Al 225-1100 A	—	—	1446
EDH-GEA-00345	TCALK2125	600-1200 A	—	—	1446
EDH-GEA-00343	TCALK3124	Cu 275-1200 A / Al 225-1100 A	—	—	1447
EDH-GEA-00346	TCALK3125	600-1200 A	—	—	1447
EDH-GEA-00336	TCALK318	15-150 A	—	—	1436
EDH-GEA-00338	TCALK329	70-250 A	—	—	1439
EDH-GEA-00339	TCLK265	125-600 A	—	—	1442
EDH-GEA-00340	TCLK365	125-600 A	—	—	1443
EDH-GEA-00358	TCO124	600-1200 A	—	—	1448
EDH-GEA-00359	TCO125	600-1200 A	—	—	1448
EDH-GEA-00355	TCO29	70-250 A	—	—	1441
EDH-GEA-00356	TCOK265	125-600 A	—	—	1443
EDH-GEA-00357	TCOK365	125-600 A	—	—	1443
EDH-GEA-00726	TE12PD1	150 A	—	—	1377
EDH-GEA-00727	TE12PD2	150 A	—	—	1377
EDH-GEA-00728	TE13PD1	150 A	—	—	1450
EDH-GEA-00729	TE13PD2	150 A	—	—	1451
EDH-GEA-00256	TED1DPK	150 A	—	—	1118
EDH-GEA-00598	TED1DPK2	150 A	—	—	1119
EDH-GEA-00261	TEL1DPK	150 A	—	—	1119

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00730	TF22PD1	225-250 A	—	—	1383
EDH-GEA-00731	TF22PD2	225-250 A	—	—	1383
EDH-GEA-00732	TF23PD1	225-250 A	—	—	1384
EDH-GEA-00733	TF23PD2	225-250 A	—	—	1384
EDH-GEA-00257	TF2DPK	225 A	—	—	1119
EDH-GEA-00968	THFP221X	30 A	2	240 V	1140
EDH-GEA-00969	THFP221XL	30 A	2	240 V	1140
EDH-GEA-00974	THFP222X	60 A	2	240 V	1140
EDH-GEA-00975	THFP222XL	60 A	2	240 V	1141
EDH-GEA-00977	THFP223	100 A	2	240 V	1141
EDH-GEA-00978	THFP223L	100 A	2	240 V	1141
EDH-GEA-00979	THFP223X	100 A	2	240 V	1141
EDH-GEA-00980	THFP223XL	100 A	2	240 V	1142
EDH-GEA-00982	THFP224	200 A	2	240 V	1142
EDH-GEA-00984	THFP225	400 A	2	240 V	1142
EDH-GEA-00986	THFP226	600 A	2	240 V	1142
EDH-GEA-00988	THFP261	30 A	2	600 V	1143
EDH-GEA-00989	THFP261L	30 A	2	600 V	1143
EDH-GEA-00992	THFP262	60 A	2	600 V	1143
EDH-GEA-00993	THFP262L	60 A	2	600 V	1143
EDH-GEA-00996	THFP263	100 A	2	600 V	1144
EDH-GEA-00997	THFP263L	100 A	2	600 V	1144
EDH-GEA-00970	THFP321	30 A	3	240 V	1144
EDH-GEA-00971	THFP321L	30 A	3	240 V	1144
EDH-GEA-00972	THFP321X	30 A	3	240 V	1145
EDH-GEA-00973	THFP321XL	30 A	3	240 V	1145
EDH-GEA-00976	THFP322	60 A	3	240 V	1145
EDH-GEA-00981	THFP323	100 A	3	240 V	1145
EDH-GEA-00983	THFP324	200 A	3	240 V	1146
EDH-GEA-00985	THFP325	400 A	3	240 V	1146
EDH-GEA-00987	THFP326	600 A	3	240 V	1146
EDH-GEA-00990	THFP361	30 A	3	600 V	1146
EDH-GEA-00991	THFP361L	30 A	3	600 V	1147
EDH-GEA-00994	THFP362	60 A	3	600 V	1147
EDH-GEA-00995	THFP362L	60 A	3	600 V	1147
EDH-GEA-00998	THFP363	100 A	3	600 V	1147
EDH-GEA-00999	THFP363L	100 A	3	600 V	1148
EDH-GEA-01000	THFP364	200 A	3	600 V	1148
EDH-GEA-01001	THFP365	400 A	3	600 V	1148
EDH-GEA-01002	THFP366	600 A	3	600 V	1148
EDH-GEA-01003	THFP367	800 A	3	600 V	1149
EDH-GEA-01004	THFP368	1200 A	3	600 V	1149
EDH-GEA-00600	THFP63DPK	100 A	—	—	1120
EDH-GEA-00601	THFP63SPK	100 A	—	—	1121
EDH-GEA-00602	THFP64SPK	200 A	—	—	1121
EDH-GEA-00603	THFP65SPK	400 A	—	—	1121
EDH-GEA-00597	THJV6DPK	600 A	—	—	1122
EDH-GEA-00953	THLC1DPK	150 A	—	—	1122
EDH-GEA-00958	THLC1SPK	150 A	—	—	1123
EDH-GEA-00959	THLC4SPK	400 A	—	—	1123
EDH-GEA-00734	TJ42PD1A	400 A	—	—	1398
EDH-GEA-00735	TJ42PD2A	400 A	—	—	1398

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00736	TJ43PD1A	400 A	—	—	1399
EDH-GEA-00737	TJ43PD2A	400 A	—	—	1400
EDH-GEA-00259	TJ4DPK	400 A	—	—	1123
EDH-GEA-00738	TJ62PD1A	600 A	—	—	1400
EDH-GEA-00739	TJ62PD2A	600 A	—	—	1401
EDH-GEA-00740	TJ63PD1A	600 A	—	—	1402
EDH-GEA-00741	TJ63PD2A	600 A	—	—	1402
EDH-GEA-00260	TJ6DPK	600 A	—	—	1124
EDH-GEA-00596	TJ6SPK	600 A	—	—	1124
EDH-GEA-00957	TJ9SPK	600 A	—	—	1124
EDH-GEA-00750	TK102PD1A	1000 A	—	—	1415
EDH-GEA-00751	TK102PD2A	1000 A	—	—	1416
EDH-GEA-00752	TK103PD1A	1000 A	—	—	1458
EDH-GEA-00753	TK103PD2A	1000 A	—	—	1459
EDH-GEA-00754	TK122PD1A	1200 A	—	—	1416
EDH-GEA-00755	TK122PD2A	1200 A	—	—	1417
EDH-GEA-00756	TK123PD1A	1200 A	—	—	1460
EDH-GEA-00757	TK123PD2A	1200 A	—	—	1460
EDH-GEA-00264	TK12SPK	1200 A	—	—	1125
EDH-GEA-00742	TK62PD1A	600 A	—	—	1417
EDH-GEA-00743	TK62PD2A	600 A	—	—	1418
EDH-GEA-00744	TK63PD1A	600 A	—	—	1418
EDH-GEA-00745	TK63PD2A	600 A	—	—	1419
EDH-GEA-00746	TK82PD1A	800 A	—	—	1419
EDH-GEA-00747	TK82PD2A	800 A	—	—	1420
EDH-GEA-00748	TK83PD1A	800 A	—	—	1461
EDH-GEA-00749	TK83PD2A	800 A	—	—	1462
EDH-GEA-00263	TK8SPK	800 A	—	—	1125
EDH-GEA-00599	TK9SPK	1200 A	—	—	1125
EDH-GEA-00956	TKL12SPK	1200 A	—	—	1126
EDH-GEA-00595	TP8SPK	800 A	—	—	1126
EDH-GEA-00258	TQ2DPK	225 A	—	—	1126
EDH-GEA-00783	TQCBMPA1	—	1	—	1390
EDH-GEA-00786	TQCBMPA10	—	10	—	1390
EDH-GEA-00784	TQCBMPA2	—	2	—	1391
EDH-GEA-00785	TQCBMPA3	—	3	—	1391
EDH-GEA-00791	TQCFMP1	—	1	—	1391
EDH-GEA-00792	TQCFMP2	—	2	—	1392
EDH-GEA-00793	TQCFMP3	—	3	—	1392
EDH-GEA-00794	TQCFMP4	—	4	—	1392
EDH-GEA-00787	TQCGFBMPA1	—	1	—	1393
EDH-GEA-00790	TQCGFBMPA10	—	10	—	1393
EDH-GEA-00788	TQCGFBMPA2	—	2	—	1393
EDH-GEA-00789	TQCGFBMPA3	—	3	—	1393
EDH-OTH-00072	UBIF015N	15	1	120	1895
EDH-OTH-00073	UBIF020N	20	1	120	1895
EDH-OTH-00077	UBIF0215N	15	2	120/240	1896
EDH-OTH-00078	UBIF0220N	20	2	120/240	1896
EDH-OTH-00079	UBIF0230N	30	2	120/240	1897
EDH-OTH-00080	UBIF0240N	40	2	120/240	1897
EDH-OTH-00081	UBIF0250N	50	2	120/240	1898
EDH-OTH-00074	UBIF030N	30	1	120	1898

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-OTH-00075	UBIF040N	40	1	120	1899
EDH-OTH-00076	UBIF050N	50	1	120	1899
EDH-OTH-00082	UBIF15N	15	1	120	1900
EDH-OTH-00083	UBIF20N	20	1	120	1900
EDH-OTH-00087	UBIF215N	15	2	120/240	1901
EDH-OTH-00088	UBIF220N	20	2	120/240	1901
EDH-OTH-00089	UBIF230N	30	2	120/240	1902
EDH-OTH-00090	UBIF240N	40	2	120/240	1902
EDH-OTH-00091	UBIF250N	50	2	120/240	1903
EDH-OTH-00092	UBIF260N	60	2	120/240	1903
EDH-OTH-00093	UBIF270N	70	2	120/240	1904
EDH-OTH-00084	UBIF30N	30	1	120	1904
EDH-OTH-00085	UBIF40N	40	1	120	1905
EDH-OTH-00086	UBIF50N	50	1	120	1905
EDH-OTH-00094	UBIP115	15	1	120	1604
EDH-OTH-00095	UBIP120	20	1	120	1604
EDH-OTH-00096	UBIP130	30	1	120	1605
EDH-OTH-00105	UBIP1515	15	two 1-pole	120	1605
EDH-OTH-00106	UBIP1520	15 & 20	two 1-pole	120	1606
EDH-OTH-00107	UBIP2020	20	two 1-pole	120	1606
EDH-OTH-00104	UBIP2100	100	2	120/240	1607
EDH-OTH-00097	UBIP215	15	2	120/240	1607
EDH-OTH-00098	UBIP220	20	2	120/240	1608
EDH-OTH-00099	UBIP230	30	2	120/240	1608
EDH-OTH-00100	UBIP240	40	2	120/240	1609
EDH-OTH-00101	UBIP250	50	2	120/240	1609
EDH-OTH-00102	UBIP260	60	2	120/240	1610
EDH-OTH-00103	UBIP270	70	2	120/240	1610
EDH-OTH-00125	UBIZ0220	20	2	120/240	1879
EDH-OTH-00126	UBIZ0230	30	2	120/240	1879
EDH-OTH-00127	UBIZ0240	40	2	120/240	1880
EDH-OTH-00128	UBIZ0250	50	2	120/240	1880
EDH-OTH-00129	UBIZ0260	60	2	120/240	1881
EDH-OTH-00108	UBIZ15	15	1	120	1881
EDH-OTH-00121	UBIZ1515	15	two 1-pole	120	1882
EDH-OTH-00122	UBIZ1520	15 & 20	two 1-pole	120	1882
EDH-OTH-00109	UBIZ20	20	1	120	1883
EDH-OTH-00123	UBIZ2020	20	two 1-pole	120	1883
EDH-OTH-00119	UBIZ2100	100	2	120/240	1884
EDH-OTH-00120	UBIZ2125	125	2	120/240	1884
EDH-OTH-00111	UBIZ220	20	2	120/240	1885
EDH-OTH-00112	UBIZ230	30	2	120/240	1885
EDH-OTH-00113	UBIZ240	40	2	120/240	1886
EDH-OTH-00114	UBIZ250	50	2	120/240	1886
EDH-OTH-00115	UBIZ260	60	2	120/240	1887
EDH-OTH-00116	UBIZ270	70	2	120/240	1887
EDH-OTH-00117	UBIZ280	80	2	120/240	1888
EDH-OTH-00118	UBIZ290	90	2	120/240	1888
EDH-OTH-00110	UBIZ30	30	1	120	1889
EDH-OTH-00124	UBIZ3030	30	two 1-pole	120	1889
EDH-SIE-00040	2NLK42B	250A (18, 30, 42 ckt)	—	—	1638
EDH-SIE-00041	2NLK54B	250A (54, 66 ckt)	—	—	1639

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00042	42NLK54B	all 400A (30, 54, 66 ckt)	—	—	1641
EDH-SIE-00029	4MLKA1	400A	—	—	1479
EDH-SIE-00019	4MLKA1A	400A	—	—	1627
EDH-SIE-00023	4MLKA1B	400A	—	—	1628
EDH-SIE-00030	4MLKA3	400A	—	—	1479
EDH-SIE-00020	4MLKA3A	400A	—	—	1628
EDH-SIE-00024	4MLKA3B	400A	—	—	1630
EDH-SIE-00031	4MLKC1	400A	—	—	1479
EDH-SIE-00021	4MLKC1A	400A	—	—	1630
EDH-SIE-00032	4MLKC3	400A	—	—	1480
EDH-SIE-00022	4MLKC3A	400A	—	—	1631
EDH-SIE-00424	5EH2	150 A	—	—	1710
EDH-SIE-00425	5FJ2	225 A	—	—	1710
EDH-SIE-00426	5JJ2	400 A	—	—	1710
EDH-SIE-00155	6CLE2	125A max (table max-amp rating)	—	—	1563
EDH-SIE-00191	6CLF1	250 A max	—	—	1721
EDH-SIE-00194	6CLJ1	400 A max	—	—	1722
EDH-SIE-00431	6CLJ6	600 A	—	—	1711
EDH-SIE-00198	6CLL1	600 A max	—	—	1724
EDH-SIE-00188	6E62	125 A max	—	—	1565
EDH-SIE-00190	6F62	250 A max	—	—	1567
EDH-SIE-00192	6JJ61	250 A max	—	—	1568
EDH-SIE-00193	6JJ62	400 A max	—	—	1569
EDH-SIE-00197	6LL61	600 A max	—	—	1570
EDH-SIE-00189	6QJ2	225 A max	—	—	1572
EDH-SIE-00157	6QR2	225A max (table max-amp rating)	—	—	1520
EDH-SIE-00196	6SCJ1	400 A max	—	—	1726
EDH-SIE-00200	6SCL1	600 A max	—	—	1727
EDH-SIE-00195	6SJL1	400 A max	—	—	1573
EDH-SIE-00199	6SLL1	600 A max	—	—	1574
EDH-SIE-00102	BBKB32	100A max	—	—	1483
EDH-SIE-00108	BBKQR1	225A max	—	—	1488
EDH-SIE-00109	BBKQR2	225A max	—	—	1509
EDH-SIE-00103	BBKVA4P2P3	125A max	—	—	1489
EDH-SIE-00112	BBKVA5262P2S	250A max	—	—	1490
EDH-SIE-00114	BBKVA52P3T	250A max	—	—	1510
EDH-SIE-00441	CDP7MBKQJ3	225 A	—	—	1469
EDH-SIE-00430	CDPFJ3	225 A	—	—	1717
EDH-SIE-00488	CLRSJL2	—	2-pole	—	1781
EDH-SIE-00313	CLRSJL3	—	3-pole	—	1779
EDH-SIE-00038	CNLK42B	250A (18, 30, 42 ckt)	—	—	1642
EDH-SIE-00039	CNLK54B	all 400A (30, 54, 66) and 250A 54/66 ckt	—	—	1643
EDH-SIE-00529	CQDFMB1	—	1-pole	—	1751
EDH-SIE-00530	CQDFMB2	—	2-pole	—	1751
EDH-SIE-00531	CQDFMB3	—	3-pole	—	1751
EDH-SIE-00427	EH3K	150 A	—	—	1717
EDH-SIE-00467	F6162D	800-1200	—	—	1602
EDH-SIE-00584	FBCD3	—	3-pole	—	1823
EDH-SIE-00585	FBCD4	—	4-pole	—	1823
EDH-SIE-00586	FBCF3	—	3-pole	—	1823
EDH-SIE-00587	FBCF4	—	4-pole	—	1823
EDH-SIE-00588	FBCJ3	—	3-pole	—	1824

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00589	FBCJ4	—	4-pole	—	1824
EDH-SIE-00590	FBCL3	—	3-pole	—	1824
EDH-SIE-00428	FJ3K	225 A	—	—	1718
EDH-SIE-00532	FMPG1	—	1-pole	—	1753
EDH-SIE-00533	FMPG2	—	2-pole	—	1754
EDH-SIE-00534	FMPG3	—	3-pole	—	1754
EDH-SIE-00536	IPBF4	—	4-pole	—	1825
EDH-SIE-00538	IPBM4	—	4-pole	—	1825
EDH-SIE-00540	IPBP4	—	4-pole	—	1826
EDH-SIE-00429	JJ3K	400 A	—	—	1718
EDH-SIE-00338	K-11-D-2550-01	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1652
EDH-SIE-00339	K-11-D-2550-02	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1653
EDH-SIE-00340	K-11-D-2550-03	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1653
EDH-SIE-00341	K-11-D-2550-04	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1653
EDH-SIE-00342	K-11-D-2550-05	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1654
EDH-SIE-00328	K-11-D-2551-01	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1654
EDH-SIE-00329	K-11-D-2551-02	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1654
EDH-SIE-00330	K-11-D-2551-03	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1655
EDH-SIE-00331	K-11-D-2551-04	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1655
EDH-SIE-00332	K-11-D-2551-05	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1655
EDH-SIE-00343	K-11-D-2552-01	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1656
EDH-SIE-00344	K-11-D-2552-02	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1656
EDH-SIE-00345	K-11-D-2552-03	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1656

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00346	K-11-D-2552-04	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1657
EDH-SIE-00347	K-11-D-2552-05	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1657
EDH-SIE-00333	K-11-D-2553-01	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1657
EDH-SIE-00334	K-11-D-2553-02	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1658
EDH-SIE-00335	K-11-D-2553-03	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1658
EDH-SIE-00336	K-11-D-2553-04	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1658
EDH-SIE-00337	K-11-D-2553-05	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1659
EDH-SIE-00453	K-11-D-2554-01	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1659
EDH-SIE-00455	K-11-D-2554-02	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1659
EDH-SIE-00457	K-11-D-2554-03	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1660
EDH-SIE-00459	K-11-D-2554-04	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1660
EDH-SIE-00445	K-11-D-2555-01	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1660
EDH-SIE-00447	K-11-D-2555-02	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1661
EDH-SIE-00449	K-11-D-2555-03	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1661
EDH-SIE-00451	K-11-D-2555-04	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1661
EDH-SIE-00454	K-11-D-2556-01	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1662

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00456	K-11-D-2556-02	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1662
EDH-SIE-00458	K-11-D-2556-03	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1662
EDH-SIE-00460	K-11-D-2556-04	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1663
EDH-SIE-00446	K-11-D-2557-01	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1663
EDH-SIE-00448	K-11-D-2557-02	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1663
EDH-SIE-00450	K-11-D-2557-03	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1664
EDH-SIE-00452	K-11-D-2557-04	400 A (tested in min. enclosure 20in W x 5.75in D x 56in H)	—	240 V max with BL/HBL/BLH/BLE/BLF; 480Y/277 V max with BQD	1664
EDH-SIE-00719	LKB4	400 A	—	—	1741
EDH-SIE-00720	LKB6	600 A	—	—	1741
EDH-SIE-00721	LKB8	800 A	—	—	1742
EDH-SIE-00717	LKF4	400 A	—	—	1742
EDH-SIE-00718	LKF6	600 A	—	—	1742
EDH-SIE-00035	LNLK4X11B	250A & 400A	—	—	1645
EDH-SIE-00033	LNLK5X12A	250A & 400A	—	—	1646
EDH-SIE-00036	LNLK6X17B	250A & 400A	—	—	1646
EDH-SIE-00034	LNLK7X18A	250A & 400A	—	—	1648
EDH-SIE-00037	LNLK7X20B	250A & 400A	—	—	1648
EDH-SIE-00045	MBKBC3	100A max	—	—	1473
EDH-SIE-00043	MBKBL1	100A max	—	—	1473
EDH-SIE-00044	MBKBL3	100A max	—	—	1473
EDH-SIE-00048	MBKED1	125A max	—	—	1474
EDH-SIE-00003	MBKED1A	125A max	2-pole (1-phase)	—	1613
EDH-SIE-00049	MBKED3	125A max	—	—	1474
EDH-SIE-00004	MBKED3A	125A max	3-pole (3-phase)	—	1614
EDH-SIE-00052	MBKFD1	250A max	—	—	1474
EDH-SIE-00007	MBKFD1A	250A max	2-pole (1-phase)	—	1615
EDH-SIE-00053	MBKFD3	250A max	—	—	1475
EDH-SIE-00008	MBKFD3A	250A max	3-pole (3-phase)	—	1615
EDH-SIE-00054	MBKJD1	400A max	—	—	1475
EDH-SIE-00055	MBKJD3	400A max	—	—	1476
EDH-SIE-00012	MBKJD3B	400A max	—	—	1617
EDH-SIE-00046	MBKNB1	125A max	—	—	1476
EDH-SIE-00047	MBKNB3	125A max	—	—	1476
EDH-SIE-00050	MBKQR1	225A max	—	—	1477

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00005	MBKQR1A	225A max	2-pole (1-phase)	—	1619
EDH-SIE-00051	MBKQR3	225A max	—	—	1478
EDH-SIE-00006	MBKQR3A	225A max	3-pole (3-phase)	—	1620
EDH-SIE-00001	MBKVA41A	125A max	2-pole (1-phase)	—	1621
EDH-SIE-00002	MBKVA41B	125A max	3-pole (3-phase)	—	1622
EDH-SIE-00009	MBKVA5262A	250A max	2-pole (1-phase)	—	1623
EDH-SIE-00010	MBKVA5262B	250A max	3-pole (3-phase)	—	1623
EDH-SIE-00011	MBKVA5363A	400A max	—	—	1624
EDH-SIE-00149	MG1	800A max (table max-amp rating)	—	—	1525
EDH-SIE-00175	MG1D	800A max (table max-amp rating)	—	—	1525
EDH-SIE-00025	MLKA1	250A	—	—	1480
EDH-SIE-00015	MLKA1A	250A	—	—	1631
EDH-SIE-00026	MLKA3	250A	—	—	1480
EDH-SIE-00016	MLKA3A	250A	—	—	1632
EDH-SIE-00027	MLKC1	250A	—	—	1481
EDH-SIE-00017	MLKC1A	250A	—	—	1633
EDH-SIE-00028	MLKC3	250A	—	—	1481
EDH-SIE-00018	MLKC3A	250A	—	—	1633
EDH-SIE-00433	NEB64K	125 A	—	—	1718
EDH-SIE-00432	NEB65K	125 A	—	—	1718
EDH-SIE-00179	NG1D	1200A max (table max-amp rating)	—	—	1576
EDH-SIE-00472	PC2637	—	2-pole	—	1763
EDH-SIE-00473	PC2638	—	2-pole	—	1763
EDH-SIE-00474	PC2657	—	3-pole	—	1763
EDH-SIE-00475	PC2658	—	3-pole	—	1763
EDH-SIE-00481	PC4753	—	2-pole	—	1770
EDH-SIE-00482	PC4754	—	3-pole	—	1770
EDH-SIE-00491	PC5660	—	2-pole	—	1782
EDH-SIE-00492	PC5661	—	3-pole	—	1782
EDH-SIE-00513	PC5662	—	2-pole	—	1797
EDH-SIE-00514	PC5663	—	3-pole	—	1797
EDH-SIE-00508	PC5664	—	2-pole	—	1797
EDH-SIE-00509	PC5665	—	2-pole	—	1797
EDH-SIE-00510	PC5666	—	3-pole	—	1798
EDH-SIE-00511	PC5667	—	3-pole	—	1798
EDH-SIE-00489	PC5777	—	2-pole	—	1778
EDH-SIE-00490	PC5778	—	3-pole	—	1778
EDH-SIE-00726	PE4630	400/600 A	—	480Y/277V 3-ph 4-W	1743
EDH-SIE-00732	PE4840	800 A	—	480V class	1743
EDH-SIE-00727	PF4606	400/600 A	—	480V 3-ph 3-W	1743
EDH-SIE-00733	PF4809	800 A	—	480V 3-ph 3-W	1744
EDH-SIE-00661	PLL44	400 A	—	—	1739
EDH-SIE-00662	PLL46	600 A	—	—	1740
EDH-SIE-00663	PLL48	800 A	—	—	1740
EDH-SIE-00476	PM2657	—	3-pole	—	1764
EDH-SIE-00477	PM2658	—	3-pole	—	1764
EDH-SIE-00483	PM4754	—	3-pole	—	1770
EDH-SIE-00515	PM5663	—	3-pole	—	1798

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00512	PM5666	—	3-pole	—	1798
EDH-SIE-00723	PQ2612	400/600 A	—	120/240V 1-ph 3-W	1744
EDH-SIE-00722	PQ2630	400/600 A	—	120/240V 1-ph 3-W	1744
EDH-SIE-00729	PQ2816	800 A	—	120/240V 1-ph 3-W	1744
EDH-SIE-00728	PQ2840	800 A	—	120/240V 1-ph 3-W	1745
EDH-SIE-00725	PQ4612	400/600 A	—	same 3-ph 240V class	1745
EDH-SIE-00724	PQ4630	400/600 A	—	240/120V 3-ph 4-W delta; 240V 3-ph 3-W; 208Y/120V 3-ph 4-W	1745
EDH-SIE-00731	PQ4818	800 A	—	208Y/120V class	1745
EDH-SIE-00730	PQ4840	800 A	—	240/120V delta; 240V 3-ph 3-W; 208Y/120V	1746
EDH-SIE-00125	S3VA41T	125A max (table max-amp rating)	—	—	1526
EDH-SIE-00151	S3VA41TD	125A max (table max-amp rating)	—	—	1527
EDH-SIE-00152	S3VA41TDHD	125A max (table max-amp rating)	—	—	1577
EDH-SIE-00129	S3VA52T	150/250A max (table max-amp rating)	—	—	1527
EDH-SIE-00156	S3VA52TD	150/250A max (table max-amp rating)	—	—	1528
EDH-SIE-00135	S3VA53T	400A max (table max-amp rating)	—	—	1529
EDH-SIE-00182	S3VA53T2D	400A max (table max-amp rating)	—	—	1578
EDH-SIE-00161	S3VA53TD	400A max (table max-amp rating)	—	—	1530
EDH-SIE-00142	S3VA54T	600A max (table max-amp rating)	—	—	1531
EDH-SIE-00185	S3VA54T2D	600A max (table max-amp rating)	—	—	1579
EDH-SIE-00168	S3VA54TD	600A max (table max-amp rating)	—	—	1531
EDH-SIE-00186	S3VA55TD	800/1000A max (table max-amp rating)	—	—	1580
EDH-SIE-00187	S3VA57TD	1200A max (table max-amp rating)	—	—	1580
EDH-SIE-00136	S3VA63T	400A max (table max-amp rating)	—	—	1532
EDH-SIE-00162	S3VA63TD	400A max (table max-amp rating)	—	—	1581
EDH-SIE-00143	S3VA64T	600A max (table max-amp rating)	—	—	1533
EDH-SIE-00169	S3VA64TD	600A max (table max-amp rating)	—	—	1582
EDH-SIE-00124	SBL	100A max (table max-amp rating)	—	—	1533
EDH-SIE-00150	SBLBD	100A max (table max-amp rating)	—	—	1534
EDH-SIE-00128	SCE	125A max (table max-amp rating)	—	—	1535
EDH-SIE-00180	SCED	125A max (table max-amp rating)	—	—	1582
EDH-SIE-00134	SCF	250A max (table max-amp rating)	—	—	1536
EDH-SIE-00160	SCFD	250A max (table max-amp rating)	—	—	1583
EDH-SIE-00139	SCJ	400A max (table max-amp rating)	—	—	1536
EDH-SIE-00167	SCJD	400A max (table max-amp rating)	—	—	1583
EDH-SIE-00146	SCL	600A max (table max-amp rating)	—	—	1537
EDH-SIE-00172	SCLD	600A max (table max-amp rating)	—	—	1584
EDH-SIE-00130	SDGD	150A max (table max-amp rating)	—	—	1538
EDH-SIE-00127	SE6	125A max (table max-amp rating)	—	—	1539
EDH-SIE-00154	SE6D	125A max (table max-amp rating)	—	—	1586
EDH-SIE-00349	SEBD	100 A max	—	—	1540
EDH-SIE-00133	SF6	250A max (table max-amp rating)	—	—	1540
EDH-SIE-00159	SF6D	250A max (table max-amp rating)	—	—	1586
EDH-SIE-00132	SFG	250A max (table max-amp rating)	—	—	1541
EDH-SIE-00158	SFGD	250A max (table max-amp rating)	—	—	1542
EDH-SIE-00126	SGB2	125A max (table max-amp rating)	—	—	1543
EDH-SIE-00153	SGB2D	125A max (table max-amp rating)	—	—	1543
EDH-SIE-00138	SJ1	400A max (table max-amp rating)	—	—	1544
EDH-SIE-00165	SJ1D	400A max (table max-amp rating)	—	—	1587
EDH-SIE-00166	SJ2D	400A max (table max-amp rating)	—	—	1588
EDH-SIE-00137	SJG	400A max (table max-amp rating)	—	—	1545

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00164	SJG1D	400A max (table max-amp rating)	—	—	1545
EDH-SIE-00163	SJG2D	400A max (table max-amp rating)	—	—	1589
EDH-SIE-00145	SL6	600A max (table max-amp rating)	—	—	1546
EDH-SIE-00171	SL6D	600A max (table max-amp rating)	—	—	1590
EDH-SIE-00144	SLG	600A max (table max-amp rating)	—	—	1547
EDH-SIE-00170	SLGD	600A max (table max-amp rating)	—	—	1548
EDH-SIE-00176	SLM1D	800A max (table max-amp rating)	—	—	1549
EDH-SIE-00056	SMBKED1	125A max	—	—	1706
EDH-SIE-00057	SMBKED3	125A max	—	—	1706
EDH-SIE-00058	SMBKFD1	250A max	—	—	1706
EDH-SIE-00059	SMBKFD3	250A max	—	—	1707
EDH-SIE-00060	SMBKJD1	400A max	—	—	1707
EDH-SIE-00061	SMBKJD3	400A max	—	—	1707
EDH-SIE-00362	SMLK12	400-1200 A	—	—	1519
EDH-SIE-00177	SMND	800/1200A max (table max-amp rating)	—	—	1591
EDH-SIE-00353	SNBD	100 A max	—	—	1550
EDH-SIE-00131	SQR	225A max (table max-amp rating)	—	—	1551
EDH-SIE-00181	SQRD	225A max (table max-amp rating)	—	—	1552
EDH-SIE-00141	SSCJ	400A max (table max-amp rating)	—	—	1552
EDH-SIE-00184	SSCJD	400A max (table max-amp rating)	—	—	1593
EDH-SIE-00148	SSCL	600A max (table max-amp rating)	—	—	1553
EDH-SIE-00174	SSCLD	600A max (table max-amp rating)	—	—	1594
EDH-SIE-00140	SSJ1	400A max (table max-amp rating)	—	—	1554
EDH-SIE-00183	SSJ1D	400A max (table max-amp rating)	—	—	1595
EDH-SIE-00147	SSL6	600A max (table max-amp rating)	—	—	1555
EDH-SIE-00173	SSL6D	600A max (table max-amp rating)	—	—	1596
EDH-SIE-00178	SSMND	800/1200A max (table max-amp rating)	—	—	1597
EDH-SIE-00478	TCE2	—	2-pole	—	1764
EDH-SIE-00479	TCE3	—	3-pole	—	1764
EDH-SIE-00484	TCF2	—	2-pole	—	1770
EDH-SIE-00485	TCF3	—	3-pole	—	1770
EDH-SIE-00493	TCJ2	—	2-pole	—	1778
EDH-SIE-00494	TCJ3	—	3-pole	—	1779
EDH-SIE-00516	TCM2	—	2-pole	—	1799
EDH-SIE-00517	TCM3	—	3-pole	—	1799
EDH-SIE-00518	TCN2	—	2-pole	—	1803
EDH-SIE-00519	TCN3	—	3-pole	—	1803
EDH-SIE-00542	TSLF3	—	3-pole	—	1826
EDH-SIE-00543	TSLF4	—	4-pole	—	1827
EDH-SIE-00544	TSLL3	—	3-pole	—	1827
EDH-SIE-00545	TSLL4	—	4-pole	—	1827
EDH-SIE-00548	TSLM3	—	3-pole	—	1827
EDH-SIE-00552	TSLM3M	—	3-pole	—	1828
EDH-SIE-00549	TSLM4	—	4-pole	—	1828
EDH-SIE-00553	TSLM4M	—	4-pole	—	1828
EDH-SIE-00251	TSSG3A	—	3-pole	—	1752
EDH-SIE-00546	TSSL3	—	3-pole	—	1828
EDH-SIE-00547	TSSL4	—	4-pole	—	1829
EDH-SIE-00550	TSSM3	—	3-pole	—	1829
EDH-SIE-00551	TSSM4	—	4-pole	—	1829
EDH-SIE-00442	VB610	200-200	—	—	1730
EDH-SIE-00461	VB6150	400-600	—	—	1736

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00462	VB657	30-30, 30-60, 60-60 (5, 7.5 in); 60-100, 100-100 (7.5 in)	—	—	1736
EDH-SIE-00463	VB671	100 (7.5 in); 200 (7.5, 10 in)	—	—	1738
EDH-SQD-00468	32508	—	3	—	1020
EDH-SQD-00469	32510	—	3	—	1021
EDH-SQD-00506	AL1200P24TK	1200 A	—	—	1050
EDH-SQD-00507	AL1200P25TK	1200 A	—	—	1050
EDH-SQD-00508	AL1200P25TK4	1200 A	—	—	1050
EDH-SQD-00509	AL1200R53TK	1200 A	—	—	1051
EDH-SQD-00302	AL150HD	15-150 A	—	—	713
EDH-SQD-00303	AL175JD	150-175 A	—	—	714
EDH-SQD-00304	AL250JD	150-250 A	—	—	715
EDH-SQD-00421	AL400L61K3	250 A	3	—	1034
EDH-SQD-00422	AL400L61K4	250 A	4	—	1035
EDH-SQD-00425	AL600LF52K3	400/600 A	3	—	1035
EDH-SQD-00423	AL600LS52K3	400/600 A	3	—	1035
EDH-SQD-00424	AL600LS52K4	400/600 A	4	—	1036
EDH-SQD-00502	AL800M23TK	800 A	—	—	1048
EDH-SQD-00504	AL800M23TK4	800 A	—	—	1048
EDH-SQD-00503	AL800P6TK	800 A	—	—	1049
EDH-SQD-00505	AL800P6TK4	800 A	—	—	1049
EDH-SQD-00306	CU150HD	15-150 A	—	—	716
EDH-SQD-00307	CU250JD	150-250 A	—	—	717
EDH-SQD-00426	CU400L61K3	250/400 A	3	—	1036
EDH-SQD-00427	CU400L61K4	250/400 A	4	—	1036
EDH-SQD-00430	CU600LF52K3	400/600 A	3	—	1037
EDH-SQD-00428	CU600LS52K3	400/600 A	3	—	1037
EDH-SQD-00429	CU600LS52K4	400/600 A	4	—	1037
EDH-SQD-00408	CYA060HD	<=60 A Cu (rating at 75 C)	3	—	1022
EDH-SQD-00409	CYA150HD	<=150 A Cu (rating at 75 C)	3	—	1023
EDH-SQD-00410	CYA150JD	<=150 A Cu (rating at 75 C)	3	—	1028
EDH-SQD-00411	CYA250J3	<=250 A Cu (rating at 75 C)	3	—	1029
EDH-SQD-00412	CYA400L31K3	285 A Cu (rating at 75 C)	3	—	1038
EDH-SQD-00417	CYA400L31K4	285 A Cu (rating at 75 C)	4	—	1038
EDH-SQD-00414	CYA400L51K3	380 A Cu (rating at 75 C)	3	—	1038
EDH-SQD-00419	CYA400L51K4	380 A Cu (rating at 75 C)	4	—	1039
EDH-SQD-00416	CYA400L71K3	475 A Cu (rating at 75 C)	3	—	1039
EDH-SQD-00413	CYA600L32K3	570 A Cu (rating at 75 C)	3	—	1039
EDH-SQD-00418	CYA600L32K4	570 A Cu (rating at 75 C)	4	—	1040
EDH-SQD-00415	CYA600L52K3	760 A Cu (rating at 75 C)	3	—	1040
EDH-SQD-00420	CYA600L52K4	760 A Cu (rating at 75 C)	4	—	1040
EDH-SQD-00162	HC2SN	225 A	—	—	719
EDH-SQD-00163	HC4SN	400 A	—	—	720
EDH-SQD-00164	HC6SN	600 A	—	—	720
EDH-SQD-00172	HC6SNALCU	600 A	—	—	721
EDH-SQD-00180	HC6SNCU	600 A	—	—	721
EDH-SQD-00165	HC8SN	800 A	—	—	721
EDH-SQD-00173	HC8SNALCU	800 A	—	—	722
EDH-SQD-00181	HC8SNCU	800 A	—	—	722
EDH-SQD-00203	HCM400VCA	400 A	—	—	704
EDH-SQD-00204	HCM600VCA	600 A	—	—	705
EDH-SQD-00205	HCM800VCA	800 A	—	—	705

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00178	HCP12SNALCU	1200 A	—	—	722
EDH-SQD-00186	HCP12SNCU	1200 A	—	—	723
EDH-SQD-00175	HCP4SNALCU	400 A	—	—	723
EDH-SQD-00176	HCP6SNALCU	600 A	—	—	723
EDH-SQD-00177	HCP8SNALCU	800 A	—	—	724
EDH-SQD-00166	HCPSU8SN	800 A	—	—	724
EDH-SQD-00174	HCPSU8SNALCU	800 A	—	—	724
EDH-SQD-00182	HCPSU8SNCU	800 A	—	—	725
EDH-SQD-00179	HCR12SNALCU	1200 A	—	—	725
EDH-SQD-00189	HCR12SNCT	1200 A	—	—	726
EDH-SQD-00188	HCR12SNCU	1200 A	—	—	726
EDH-SQD-00209	HCW1200VCA	1200 A	—	—	705
EDH-SQD-00170	HCW12SN	1200 A	—	—	727
EDH-SQD-00187	HCW12SNCU	1200 A	—	—	727
EDH-SQD-00206	HCW400VCA	400 A	—	—	705
EDH-SQD-00167	HCW4SN	400 A	—	—	728
EDH-SQD-00183	HCW4SNCU	400 A	—	—	728
EDH-SQD-00207	HCW600VCA	600 A	—	—	706
EDH-SQD-00168	HCW6SN	600 A	—	—	729
EDH-SQD-00184	HCW6SNCU	600 A	—	—	729
EDH-SQD-00208	HCW800VCA	800 A	—	—	706
EDH-SQD-00169	HCW8SN	800 A	—	—	730
EDH-SQD-00185	HCW8SNCU	800 A	—	—	730
EDH-SQD-00171	HCWM12SN	1200 A	—	—	730
EDH-SQD-00063	N150MH	15-125 A interiors (H-frame 150 A max)	—	—	790
EDH-SQD-00064	N250MJ	125-250 A	—	—	791
EDH-SQD-00065	N400M	125-400 A	—	—	792
EDH-SQD-00066	N600MPPL	125-600 A main; 400 A max as SFB	—	—	792
EDH-SQD-00078	NF125FTL	125 A	—	—	802
EDH-SQD-00075	NF125SFL	125 A	—	—	801
EDH-SQD-00079	NF250FTL	250 A	—	—	802
EDH-SQD-00081	NF250SFBH	250 A mains	—	—	793
EDH-SQD-00082	NF250SFBJ	250 A mains	—	—	793
EDH-SQD-00076	NF250SFL	250 A	—	—	801
EDH-SQD-00080	NF400FTL	400 A	—	—	803
EDH-SQD-00077	NF400SFL	400 A	—	—	801
EDH-SQD-00083	NF600SFBH	400 A mains	—	—	793
EDH-SQD-00084	NF600SFBJ	400 A mains	—	—	794
EDH-SQD-00085	NF600SFBPPL	600 A	—	—	794
EDH-SQD-00092	NFALV1	125 A	—	—	795
EDH-SQD-00095	NFALV2	250 A	—	—	795
EDH-SQD-00098	NFALV4	400 A	—	—	796
EDH-SQD-00101	NFALV6	600 A	—	—	796
EDH-SQD-00093	NFCUM1	125 A	—	—	797
EDH-SQD-00096	NFCUM2	250 A	—	—	797
EDH-SQD-00099	NFCUM4	400 A	—	—	798
EDH-SQD-00102	NFCUM6	600 A	—	—	798
EDH-SQD-00094	NFCUV1	125 A	—	—	799
EDH-SQD-00097	NFCUV2	250 A	—	—	799
EDH-SQD-00100	NFCUV4	400 A	—	—	800
EDH-SQD-00103	NFCUV6	600 A	—	—	800
EDH-SQD-00089	NFN1CU	125 A	—	—	805

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00090	NFN2CU	250 A	—	—	806
EDH-SQD-00091	NFN6CU	400/600 A	—	—	806
EDH-SQD-00086	NFNL1	125 A	—	—	806
EDH-SQD-00087	NFNL2	250 A	—	—	807
EDH-SQD-00088	NFNL4	400 A	—	—	807
EDH-SQD-00028	NQALMN6	600 A	—	—	836
EDH-SQD-00029	NQALV1	100 A	—	—	826
EDH-SQD-00032	NQALV2	225 A	—	—	827
EDH-SQD-00035	NQALV4	400 A	—	—	827
EDH-SQD-00038	NQALV6	600 A	—	—	828
EDH-SQD-00030	NQCUM1	100 A	—	—	828
EDH-SQD-00033	NQCUM2	225 A	—	—	829
EDH-SQD-00036	NQCUM4	400 A	—	—	829
EDH-SQD-00039	NQCUM6	600 A	—	—	830
EDH-SQD-00031	NQCUV1	100 A	—	—	830
EDH-SQD-00034	NQCUV2	225 A	—	—	831
EDH-SQD-00037	NQCUV4	400 A	—	—	831
EDH-SQD-00040	NQCUV6	600 A	—	—	832
EDH-SQD-00012	NQFTL2H	225 A	—	—	834
EDH-SQD-00011	NQFTL2L	225 A	—	—	835
EDH-SQD-00014	NQFTL4H	400 A	—	—	835
EDH-SQD-00013	NQFTL4L	400 A	—	—	836
EDH-SQD-00003	NQMB2HJ	100 A interiors (H) and 225 A interiors (H or J)	—	—	820
EDH-SQD-00005	NQMB2KI	225 A max	—	—	821
EDH-SQD-00001	NQMB2Q	15-225 A (100-225 A per distributor)	—	—	821
EDH-SQD-00006	NQMB4LA	125-400 A	—	—	822
EDH-SQD-00024	NQN1CU	100 A	—	—	839
EDH-SQD-00025	NQN2CU	225 A	—	—	839
EDH-SQD-00027	NQN6CRUS	400/600 A	—	—	839
EDH-SQD-00026	NQN6CU	400 A	—	—	840
EDH-SQD-00020	NQNL1	100 A	—	—	840
EDH-SQD-00021	NQNL2	225 A	—	—	841
EDH-SQD-00022	NQNL2ACCY	225 A	—	—	841
EDH-SQD-00023	NQNL4	400 A	—	—	842
EDH-SQD-00915	NQOD100SFL	100 A	—	—	906
EDH-SQD-00916	NQOD225SFL	225 A	—	—	906
EDH-SQD-00914	NQOD4	400 A	—	—	904
EDH-SQD-00913	NQODJK	225 A	—	—	905
EDH-SQD-00911	NQODQB	225 A	—	—	905
EDH-SQD-00016	NQSFB2HJ	225 A interiors (one SFB)	—	—	823
EDH-SQD-00015	NQSFB2Q	225 A interiors (one SFB)	—	—	824
EDH-SQD-00018	NQSFB4HJ	400 A interiors; one or two SFBs	—	—	824
EDH-SQD-00017	NQSFB4Q	400 A interiors; one or two SFBs (225 A max each)	—	—	825
EDH-SQD-00019	NQSFB6PPL	600 A interiors (one SFB); PowerPacT L requires 8.75 in. deep enclosure	—	—	825
EDH-SQD-00008	NQSFL1	100 A	—	—	832
EDH-SQD-00009	NQSFL2	225 A	—	—	833
EDH-SQD-00010	NQSFL4	400 A	—	—	833
EDH-SQD-00568	QM-1SN	200 A	—	—	981
EDH-SQD-00569	QM-2SN	200 A	—	—	981
EDH-SQD-00570	QM-4SN	400 A	—	—	981

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00571	QM-6SN	600 A	—	—	981
EDH-SQD-00301	QMB12CLA	1200 A	—	—	924
EDH-SQD-00885	QMB12SN	1200 A	—	—	931
EDH-SQD-00222	QMB221HW	30-blank (single switch in twin frame) A	2	240 Vac / 250 Vdc	944
EDH-SQD-00221	QMB221TW	30-30 (twin) A	2	240 Vac / 250 Vdc	945
EDH-SQD-00224	QMB222HW	60-blank A	2	240 Vac / 250 Vdc	945
EDH-SQD-00223	QMB222TW	60-60 (twin) A	2	240 Vac / 250 Vdc	946
EDH-SQD-00226	QMB223HW	100-blank A	2	240 Vac / 250 Vdc	946
EDH-SQD-00225	QMB223TW	100-100 (twin) A	2	240 Vac / 250 Vdc	947
EDH-SQD-00227	QMB224W	200 (single) A	2	240 Vac / 250 Vdc	947
EDH-SQD-00228	QMB225W	400 (single) A	2	240 Vac / 250 Vdc	948
EDH-SQD-00229	QMB225WT3	400 (single, 300 Vac Class T fuses only) A	2	240 Vac	948
EDH-SQD-00243	QMB261HW	30-blank A	2	600 Vac / 250 Vdc	949
EDH-SQD-00242	QMB261TW	30-30 (twin) A	2	600 Vac / 250 Vdc	949
EDH-SQD-00245	QMB262HW	60-blank A	2	600 Vac / 250 Vdc	950
EDH-SQD-00244	QMB262TW	60-60 (twin) A	2	600 Vac / 250 Vdc	950
EDH-SQD-00247	QMB263HW	100-blank A	2	600 Vac / 250 Vdc	951
EDH-SQD-00246	QMB263TW	100-100 (twin) A	2	600 Vac / 250 Vdc	951
EDH-SQD-00248	QMB264W	200 (single) A	2	600 Vac / 250 Vdc	952
EDH-SQD-00881	QMB2SN	225 A	—	—	931
EDH-SQD-00231	QMB321HW	30-blank A	3	240 Vac	952
EDH-SQD-00230	QMB321TW	30-30 (twin) A	3	240 Vac	953
EDH-SQD-00233	QMB322HW	60-blank A	3	240 Vac	953
EDH-SQD-00232	QMB322TW	60-60 (twin) A	3	240 Vac	953
EDH-SQD-00235	QMB323HW	100-blank A	3	240 Vac	954
EDH-SQD-00234	QMB323TW	100-100 (twin) A	3	240 Vac	955
EDH-SQD-00236	QMB324W	200 (single) A	3	240 Vac	956
EDH-SQD-00237	QMB325W	400 (single) A	3	240 Vac	957
EDH-SQD-00238	QMB325WT3	400 (single, 300 Vac Class T fuses only) A	3	240 Vac	957
EDH-SQD-00239	QMB326W	600 (single) A	3	240 Vac	958
EDH-SQD-00240	QMB326WT3	600 (single, 300 Vac Class T fuses only) A	3	240 Vac	959
EDH-SQD-00241	QMB327WT3	800 (single, 300 Vac Class T fuses only) A	3	240 Vac	959
EDH-SQD-00250	QMB361HW	30-blank A	3	600 Vac	960
EDH-SQD-00249	QMB361TW	30-30 (twin) A	3	600 Vac	960
EDH-SQD-00252	QMB362HW	60-blank A	3	600 Vac	961
EDH-SQD-00253	QMB362T21W	60-30 (twin, unequal) A	3	600 Vac	961
EDH-SQD-00251	QMB362TW	60-60 (twin) A	3	600 Vac	962
EDH-SQD-00255	QMB363HW	100-blank A	3	600 Vac	962
EDH-SQD-00256	QMB363T31W	100-30 (twin, unequal) A	3	600 Vac	963
EDH-SQD-00257	QMB363T32W	100-60 (twin, unequal) A	3	600 Vac	964
EDH-SQD-00254	QMB363TW	100-100 (twin) A	3	600 Vac	964
EDH-SQD-00258	QMB364W	200 (single) A	3	600 Vac	965
EDH-SQD-00259	QMB365W	400 (single) A	3	600 Vac / 250 Vdc	966
EDH-SQD-00260	QMB365WT6	400 (single, 600 Vac Class T fuses only) A	3	600 Vac	966
EDH-SQD-00261	QMB366W	600 (single) A	3	600 Vac / 250 Vdc	967
EDH-SQD-00262	QMB367W	800 (single) A	3	600 Vac	968
EDH-SQD-00882	QMB4SN	400 A	—	—	931
EDH-SQD-00883	QMB6SN	600 A	—	—	932
EDH-SQD-00300	QMB8CLA	800 A	—	—	924

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00884	QMB8SN	800 A	—	—	932
EDH-SQD-00264	QMJ361T	30-30 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	968
EDH-SQD-00265	QMJ362T	60-60 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	969
EDH-SQD-00267	QMJ363H	100-blank A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	969
EDH-SQD-00266	QMJ363T	100-100 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	970
EDH-SQD-00269	QMJ364H	200-blank A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	970
EDH-SQD-00268	QMJ364T	200-200 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	971
EDH-SQD-00270	QMJ365	400 (single) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	971
EDH-SQD-00271	QMJ366	600 (single) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	972
EDH-SQD-00549	QO-100ASF	100 A	—	—	899
EDH-SQD-00550	QO-225ASF	225 A	—	—	900
EDH-SQD-00056	QOB2125SL	125 A (from catalog number; not stated)	—	—	833
EDH-SQD-00057	QOB3125SL	125 A (from catalog number; not stated)	—	—	834
EDH-SQD-00439	S32477	—	3	—	1046
EDH-SQD-00440	S32478	—	4	—	1046
EDH-SQD-00443	S32562	—	3	—	1044
EDH-SQD-00444	S32563	—	4	—	1045
EDH-SQD-00213	S33930	1200 A	3	—	707
EDH-SQD-00217	S33931	1200 A	3	—	707
EDH-SQD-00431	S37432	—	3	—	1025
EDH-SQD-00432	S37433	—	2/3	—	1027
EDH-SQD-00433	S37434	—	2/3	—	1028
EDH-SQD-00434	S37436	—	3	—	1025
EDH-SQD-00435	S37437	—	3	—	1033
EDH-SQD-00436	S37438	—	2/3	—	1033
EDH-SQD-00437	S37439	—	3	—	1033
EDH-SQD-00438	S37440	—	3	—	1030
EDH-SQD-00441	S432475	—	3	—	1047
EDH-SQD-00442	S432476	—	3	—	1047
EDH-SQD-00520	SF-100LP	100 A	—	—	900
EDH-SQD-00521	SF-225LP	225 A	—	—	900
EDH-SQD-00104	SKNF250	125-250 A interiors	—	—	804
EDH-SQD-00105	SKNF600	400-800 A (distributor listing)	—	—	805
EDH-SQD-00218	SL100	100 A	3	—	708
EDH-SQD-00214	SL1200P5	1200 A	3	—	709
EDH-SQD-00215	SL1200P6	1200 A	3	—	709
EDH-SQD-00216	SL1200P7	1200 A	3	—	710
EDH-SQD-00563	SL-225	225 A	—	—	710
EDH-SQD-00210	SL250	250 A	3	—	711
EDH-SQD-00211	SL400	400 A	3	—	711
EDH-SQD-00358	SL800	800 A	—	—	712
EDH-SQD-00212	SL800M5	800 A	3	—	713
EDH-SQD-00619	SSP01SBA08D	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 6 modes of protection	—	120/240 V	877
EDH-SQD-00620	SSP01SBA10D	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 6 modes of protection	—	120/240 V	877

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00621	SSP01SBA12D	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 6 modes of protection	—	120/240 V	877
EDH-SQD-00622	SSP01SBA16D	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 6 modes of protection	—	120/240 V	878
EDH-SQD-00623	SSP01SBA20D	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 6 modes of protection	—	120/240 V	878
EDH-SQD-00624	SSP01SBA24D	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 6 modes of protection	—	120/240 V	878
EDH-SQD-00625	SSP02SBA08D	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 10 modes of protection	—	208Y/120 V	879
EDH-SQD-00626	SSP02SBA10D	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 10 modes of protection	—	208Y/120 V	879
EDH-SQD-00627	SSP02SBA12D	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 10 modes of protection	—	208Y/120 V	879
EDH-SQD-00628	SSP02SBA16D	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 10 modes of protection	—	208Y/120 V	880
EDH-SQD-00629	SSP02SBA20D	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 10 modes of protection	—	208Y/120 V	880
EDH-SQD-00630	SSP02SBA24D	I(n) 20 kA; SCCR 200 kA; VPR 700 V L-N, L-G / 600 V N-G / 1000 V L-L; 10 modes of protection	—	208Y/120 V	880
EDH-SQD-00395	YA060HD	<=60 A Al/Cu (rating at 75 C)	3	—	1024
EDH-SQD-00396	YA150HD	<=150 A (rating at 75 C)	3	—	1024
EDH-SQD-00397	YA150JD	<=200 A (rating at 75 C)	3	—	1030
EDH-SQD-00398	YA250J35	<=250 A (rating at 75 C)	3	—	1030
EDH-SQD-00399	YA400L31K3	230 A Al / 285 A Cu @75C (rating at 75 C)	3	—	1041
EDH-SQD-00401	YA400L51K3	310 A Al / 380 A Cu (rating at 75 C)	3	—	1042
EDH-SQD-00405	YA400L51K4	310 A Al / 380 A Cu (rating at 75 C)	4	—	1042
EDH-SQD-00403	YA400L71K3	385 A Al / 475 A Cu (rating at 75 C)	3	—	1042
EDH-SQD-00407	YA400L71K4	385 A Al / 475 A Cu (rating at 75 C)	4	—	1043
EDH-SQD-00400	YA600L32K3	460 A Al / 570 A Cu (rating at 75 C)	3	—	1043
EDH-SQD-00404	YA600L32K4	460 A Al / 570 A Cu (rating at 75 C)	4	—	1043
EDH-SQD-00402	YA600L52K3	620 A Al / 760 A Cu (rating at 75 C)	3	—	1044
EDH-SQD-00406	YA600L52K4	620 A Al / 760 A Cu (rating at 75 C)	4	—	1044
EDH-ZIN-00023	LK-15	150 A	—	—	1877
EDH-ZIN-00024	LK-22	225 A	—	—	1877
EDH-ZIN-00001	QSF100DS	100 A	—	—	1874
EDH-ZIN-00014	QSF100SB	100 A	—	—	1874
EDH-ZIN-00013	QSF100SS	100 A	—	—	1874
EDH-ZIN-00002	QSF200DS	200 A	—	—	1874
EDH-ZIN-00015	QSF200SB	200 A	—	—	1875
EDH-ZIN-00003	QSF400DS	400 A	—	—	1875
EDH-ZIN-00016	QSF400SB	listed '200A' - probably 400 A	—	—	1875
EDH-ZIN-00004	QSF600DS	600 A	—	—	1875
EDH-ZIN-00018	SECT	225 A	—	—	1875
EDH-ZIN-00017	SEHT	100 A	—	—	1876
EDH-ZIN-00019	SJD4T	400 A	—	—	1876
EDH-ZIN-00020	SKM8S	800 A	—	—	1876

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-ZIN-00025	UBIZRBK12	125 A	—	—	1878

12.7 Physical dimension and hole-pattern index

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00249	4180B08	Height 1.00-16.00 in by H number; width not stated A	—	249
EDH-EAT-00269	4176B72	Fills 1 3/8 in (1X) to 16 1/2 in (12X) height; 13 in wide (for 20 in and 28 in wide boxes) A	—	370
EDH-EAT-00285	42C8083H01	Length 4.220 in C	—	370
EDH-EAT-00291	3456B99H01	Height 3.00 in (76.2 mm) A	—	176
EDH-EAT-00292	3456B35H01	Height 6.00 in (152.4 mm) A	—	175
EDH-EAT-00293	3456B99H05	Height 15.00 in (381.0 mm) A	—	176
EDH-EAT-00294	6554C01	Width 17 in; height 1X = 1 3/8 in ... 20X = 27 1/2 in A	—	472
EDH-EAT-00295	6554C02	Width 25 in; height in X units (1X = 1.38 in) A	—	476
EDH-EAT-00296	P41X25	1.375 in H x 25 in W C	—	480
EDH-EAT-00299	KPRL4X12	Space required 2X (2.75 in) (1X = 1.38 in) A	—	459
EDH-EAT-00300	KPRL4X22	Space required 2X (2.75 in) (1X = 1.38 in) A	—	460
EDH-EAT-00301	KPRL4X32	Space required 3X (4.13 in) (1X = 1.38 in) A	—	461
EDH-EAT-00302	KPRL4X334S	Space required 4X (5.50 in) (1X = 1.38 in) A	—	462
EDH-EAT-00303	KPRL4X334T	Space required 4X (5.50 in) (1X = 1.38 in) A	—	462
EDH-EAT-00304	KPRL4X336	Space required 4X (PDG3) / 6X (LG) per table (1X = 1.38 in) A	—	463
EDH-EAT-00305	KPRL4X34	Space required 6X (8.25 in) (1X = 1.38 in) A	—	464
EDH-EAT-00306	KPRL4X35	Space required 6X (8.25 in) (1X = 1.38 in) A	—	465
EDH-EAT-00307	KPRL4FDCL	Space required 3X (4.13 in) (1X = 1.38 in) A	—	444
EDH-EAT-00308	KPRL4CA	Space required 2X/3X (1X = 1.38 in) A	—	434
EDH-EAT-00309	KPRL4JDS	Space required 3X (4.13 in) (1X = 1.38 in) A	—	445
EDH-EAT-00310	KPRL4JDT	Space required 3X (4.13 in) (1X = 1.38 in) A	—	446
EDH-EAT-00311	KPRL4FBP	Space required 3X (4.13 in) (1X = 1.38 in) A	—	439
EDH-EAT-00312	KPRL4KDS	Space required 4X (5.50 in) (1X = 1.38 in) A	—	447
EDH-EAT-00313	KPRL4KDT	Space required 4X (5.50 in) (1X = 1.38 in) A	—	448
EDH-EAT-00314	KPRL4LC	Space required 6X (8.25 in) (1X = 1.38 in) A	—	450
EDH-EAT-00315	KPRL4LG	Space required 4X (5.50 in) (1X = 1.38 in) A	—	454
EDH-EAT-00316	KPRL4MC	Space required 6X (8.25 in) (1X = 1.38 in) A	—	455
EDH-EAT-00317	KPRL4LAP	Space required 6X (8.25 in) (1X = 1.38 in) A	—	449
EDH-EAT-00318	KPRL4LCL	Space required 6X (8.25 in) (1X = 1.38 in) A	—	451
EDH-EAT-00319	KPRL4NBP	Space required 6X (8.25 in) (1X = 1.38 in) A	—	456
EDH-EAT-00320	KPRL4NC	Space required 6X (8.25 in) (1X = 1.38 in) A	—	457
EDH-EAT-00321	KPRL4ND	Space required 6X (8.25 in) (1X = 1.38 in) A	—	458
EDH-EAT-00322	KPRL4CKD	Space required 4X (5.50 in) (1X = 1.38 in) A	—	435
EDH-EAT-00323	KPRL4MD	Space required 6X (8.25 in) (1X = 1.38 in) A	—	456
EDH-EAT-00324	KPRL4CND	Space required 6X (8.25 in) (1X = 1.38 in) A	—	436
EDH-EAT-00325	KPRL4FD1	2X space (1X = 1.38 in) A	—	442
EDH-EAT-00326	KPRL4FD2	2X space (1X = 1.38 in) A	—	443
EDH-EAT-00327	KPRL4ED2	2X space (1X = 1.38 in) A	—	438
EDH-EAT-00328	KPRL4FD	3X space (1X = 1.38 in) A	—	441
EDH-EAT-00329	KPRL4ED	3X space (1X = 1.38 in) A	—	437
EDH-EAT-00330	KPRL4LD	6X space (1X = 1.38 in) A	—	452
EDH-EAT-00331	KPRL44X	Switch space 4X (5.50 in) A	—	421
EDH-EAT-00332	KPRL45X1	Switch space 5X (6.88 in) A	—	423
EDH-EAT-00333	KPRL45X	Switch space 5X (6.88 in) A	—	422
EDH-EAT-00334	KPRL45XS	Switch space unknown D	—	423

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00335	KPRL4B6XS	Switch space 6X (8.25 in) A	—	424
EDH-EAT-00336	KPRL4B6XT	Switch space 6X (8.25 in) A	—	424
EDH-EAT-00337	KPRL4W9X	Switch space 9X (12.38 in) A	—	426
EDH-EAT-00338	KPRL4W11X	Switch space 11X (15.13 in) A	—	424
EDH-EAT-00339	KPRL4W15X	Switch space 15X (20.63 in) A	—	426
EDH-EAT-00340	KCDPFB100	3X space (1X = 1.38 in) A	—	85
EDH-EAT-00341	KCDPED225	3X space (1X = 1.38 in) A	—	85
EDH-EAT-00342	KCDPFBP	3X space (1X = 1.38 in) A	—	86
EDH-EAT-00343	KCDPCA	3X space (1X = 1.38 in) A	—	84
EDH-EAT-00344	KCDPKB	3X space (1X = 1.38 in) A	—	87
EDH-EAT-00345	KCDPLB	4X space (1X = 1.38 in) A	—	89
EDH-EAT-00346	KCDPLA400	6X space (1X = 1.38 in) A	—	88
EDH-EAT-00347	KCDPLA600	6X space (1X = 1.38 in) A	—	88
EDH-EAT-00348	KCDPLCL	6X space (1X = 1.38 in) A	—	90
EDH-EAT-00349	KCDPMC	6X space (1X = 1.38 in) A	—	90
EDH-EAT-00350	KCDPNC	6X space (1X = 1.38 in) A	—	92
EDH-EAT-00351	KCDPNBP	6X space (1X = 1.38 in) A	—	91
EDH-EAT-00352	KCDP_X	Height = n x 1.38 in (35.1 mm) A	—	94
EDH-EAT-00366	KFDP4XT	4X space A	—	72
EDH-EAT-00367	KFDP5XT	5X space A	—	72
EDH-EAT-00368	KFDPB6X-2	6X space A	—	73
EDH-EAT-00369	KFDPW9X-4	9X space A	—	75
EDH-EAT-00370	KFDPW11X-6	11X space A	—	73
EDH-EAT-00371	KFDPW11X-8	11X space A	—	74
EDH-EAT-00372	KFDPW15X-12	15X space A	—	74
EDH-EAT-00374	5PLUG3400SC	8X space A	—	507
EDH-EAT-00375	5PLUG3600SC	8X space A	—	507
EDH-EAT-00376	5PLUG3800SC	8X space A	—	508
EDH-EAT-00377	5PLUG31200TC	7X space A	—	507
EDH-EAT-00384	5PFP1S	1X height (1X = 1.38 in) A	—	511
EDH-EAT-00385	5PFP1T	1X height (1X = 1.38 in) A	—	511
EDH-EAT-00386	5PFP2S	2X height (1X = 1.38 in) A	—	511
EDH-EAT-00387	5PFP2T	2X height (1X = 1.38 in) A	—	511
EDH-EAT-00388	5PFP3S	3X height (1X = 1.38 in) A	—	512
EDH-EAT-00389	5PFP3T	3X height (1X = 1.38 in) A	—	512
EDH-EAT-00390	5PFP4S	4X height (1X = 1.38 in) A	—	512
EDH-EAT-00391	5PFP4T	4X height (1X = 1.38 in) A	—	512
EDH-EAT-00392	5PFP5S	5X height (1X = 1.38 in) A	—	513
EDH-EAT-00393	5PFP5T	5X height (1X = 1.38 in) A	—	513
EDH-EAT-00394	5PFP6S	6X height (1X = 1.38 in) A	—	513
EDH-EAT-00395	5PFP6T	6X height (1X = 1.38 in) A	—	513
EDH-EAT-00403	5155C81G01	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	253
EDH-EAT-00405	K80522	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	273
EDH-EAT-00407	8450C62H39	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	255
EDH-EAT-00408	K80429	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	273

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00411	114C247G01	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	176
EDH-EAT-00412	3457B16G01	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	177
EDH-EAT-00420	414A380G02	Overall length 2.50 in (63.5 mm) A	—	95
EDH-EAT-00424	KFDPWT3211R	4X of chassis height A	—	128
EDH-EAT-00425	KFDPWT3611R	4X of chassis height A	—	129
EDH-EAT-00426	KFDPWT3222R	4X of chassis height A	—	128
EDH-EAT-00427	KFDPWT3622R	4X of chassis height A	—	130
EDH-EAT-00428	KFDPWT3233R	4X of chassis height A	—	129
EDH-EAT-00429	KFDPWT3633R	5X of chassis height A	—	130
EDH-EAT-00430	KFDPBS324R	6X of chassis height A	—	124
EDH-EAT-00431	KFDPBS364R	6X of chassis height A	—	124
EDH-EAT-00432	KFDPW325R	9X of chassis height A	—	125
EDH-EAT-00433	KFDPW365R	9X of chassis height A	—	126
EDH-EAT-00434	KFDPW326R	11X of chassis height A	—	125
EDH-EAT-00435	KFDPW366R	11X of chassis height A	—	126
EDH-EAT-00436	KFDPW367	11X of chassis height A	—	127
EDH-EAT-00437	KFDPW368	15X of chassis height A	—	127
EDH-EAT-00445	0080429	approx. 2.50 in (63.5 mm) per drawing C	—	94
EDH-EAT-00446	414A380G01	Overall length 3.13 in (79.5 mm); used on B10B and PRL1, 2, 3 C	—	177
EDH-EAT-00645	TEC1	conductor opening diameter 0.25 in (6.35 mm) A	—	542
EDH-EAT-00646	TEC2	conductor opening diameter 0.41 in (10.41 mm) A	—	543
EDH-EAT-00664	314C960G07	length / back-of-breaker dimension 5.47 in (L) / 5.91 in back of breaker (M) A	—	624
EDH-EAT-00665	314C960G08	length / back-of-breaker dimension 7.97 in (L) / 8.41 in (M) A	—	624
EDH-EAT-00666	314C960G09	length / back-of-breaker dimension 10.47 in (L) / 10.91 in (M) A	—	625
EDH-EAT-00667	314C960G01	length / back-of-breaker dimension 3.66 in A	—	640
EDH-EAT-00668	314C960G04	length / back-of-breaker dimension 5.91 in A	—	640
EDH-EAT-00669	314C960G05	length / back-of-breaker dimension 8.41 in A	—	640
EDH-EAT-00670	314C960G06	length / back-of-breaker dimension 10.91 in A	—	641
EDH-EAT-00671	314C960G10	length / back-of-breaker dimension 5.91 in A	—	641
EDH-EAT-00672	314C960G11	length / back-of-breaker dimension 8.41 in A	—	641
EDH-EAT-00673	314C960G12	length / back-of-breaker dimension 10.91 in A	—	642
EDH-EAT-00674	623B222G01	length / back-of-breaker dimension 5.5 in A	—	654
EDH-EAT-00675	623B222G02	length / back-of-breaker dimension 8.0 in A	—	655
EDH-EAT-00676	623B222G03	length / back-of-breaker dimension 10.5 in A	—	655
EDH-EAT-00677	373B375G04	length / back-of-breaker dimension 5.5 in A	—	653
EDH-EAT-00678	373B375G03	length / back-of-breaker dimension 10.5 in A	—	653
EDH-EAT-00706	RACH22BXXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in A	—	45
EDH-EAT-00707	RBCH30BXXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in A	—	53
EDH-EAT-00708	RBCH24BXXX	Fits existing box height 29-30 in (#2-250 kcmil) / 30.5-36 in (#2-300 kcmil); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in A	—	52
EDH-EAT-00709	RCCH32BXXX	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in A	—	60
EDH-EAT-00710	RDCH42BXXX	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in A	—	65

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00711	RDCH42HXXX	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	67
EDH-EAT-00712	RACH24L125	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	46
EDH-EAT-00713	RBCH42L125	Fits existing box height 25-26 in (#4-#1) / 26.5-30 in (#4-1/0); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	56
EDH-EAT-00714	RBCH32L225	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	55
EDH-EAT-00715	RBCH42L225	Fits existing box height 28.5-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	56
EDH-EAT-00716	RCCH42L225	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	61
EDH-EAT-00717	RDCH42L225	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	67
EDH-EAT-00718	RBCH24D225	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	52
EDH-EAT-00719	RBCH32D225	Fits existing box height 31-33.5 in (#6-250) / 34-36 in (#6-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	54
EDH-EAT-00720	RCCH32D225	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	60
EDH-EAT-00721	RDCH42D225	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	65
EDH-EAT-00722	RACH18B3XXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	45
EDH-EAT-00723	RDCH42B3XXX	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	64
EDH-EAT-00724	RDCH42H3XXX	Fits existing box height 37-38.5 in (2/0-250) / 39-45 in (2/0-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	66
EDH-EAT-00725	RACH24L3125	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	46
EDH-EAT-00726	RACH30L3125	Fits existing box height 22-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	47
EDH-EAT-00727	RACH30L3225	Fits existing box height 22.5-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	47
EDH-EAT-00728	RBCH30L3225	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	54
EDH-EAT-00729	RBCH42L3125	Fits existing box height 25-28 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	57
EDH-EAT-00730	RBCH42L3225	Fits existing box height 28.5-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	57
EDH-EAT-00731	RCCH42L3225	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	61
EDH-EAT-00732	RDCH42L3225	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	68
EDH-EAT-00733	RBCH24D3225	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	53
EDH-EAT-00734	RBCH30D3225	Fits existing box height 31-33.5 in / 34-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	54
EDH-EAT-00735	RCCH30D3225	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	59
EDH-EAT-00736	RDCH42D3225	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	66
EDH-EAT-00737	RABR20BXXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	43
EDH-EAT-00738	RABR20HXXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	43
EDH-EAT-00739	RBBR30BCXXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	49

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00740	RBBR30HCXXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	50
EDH-EAT-00741	RBBR20BXXX	Fits existing box height 29-30.5 in (#2-250) / 31-36 in (#2-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	48
EDH-EAT-00742	RCBR30BXXX	Fits existing box height 34-35.5 in (#2-250) / 36-41 in (#2-300); retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	58
EDH-EAT-00743	RDBR40BXXX	Fits existing box height 37-38.5 in (#2-4/0) / 39-40.5 in (#2-250) / 41-45 in (#2-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	63
EDH-EAT-00744	RABR20L125	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	43
EDH-EAT-00745	RBBR30L200	Fits existing box height 29-31.5 in (#1-250) / 32-36 in (#1-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	51
EDH-EAT-00746	RCBR40L200	Fits existing box height 34-36.5 in / 37-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	59
EDH-EAT-00747	RDBR42L225	Fits existing box height 37-38.5 in / 39-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	63
EDH-EAT-00748	RABR12B3XXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	41
EDH-EAT-00749	RABR12H3XXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	42
EDH-EAT-00750	RBBR30BXXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	49
EDH-EAT-00751	RBBR30H3XXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	50
EDH-EAT-00752	RDBR30B3XXX	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	62
EDH-EAT-00753	RDBR30H3XXX	Fits existing box height 37-38.5 in (2/0-250) / 39-45 in (2/0-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	62
EDH-EAT-00754	REBR42B3XXX	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in **A**	—	68
EDH-EAT-00755	REBR42H3XXX	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in **A**	—	69
EDH-EAT-00756	RABR12L3125	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	42
EDH-EAT-00757	RBBR30L3100	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	51
EDH-EAT-00758	RBBR24L3150	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	48
EDH-EAT-00759	RCBR30L3200	Fits existing box height 34-35.5 in (#4-250) / 36-41 in (#4-300); retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	58
EDH-EAT-00760	RDBR42L3225	Fits existing box height 37-38.5 in / 39-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	64
EDH-EAT-00761	REBR42L3225	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in **A**	—	69
EDH-EAT-00762	RAABR12L125	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 19 x 13 in; trim protrudes 1/2 in from drywall **A**	—	39
EDH-EAT-00763	RAABR12L125A	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 21 x 16 in; trim protrudes 1/2 in from drywall **A**	—	40
EDH-EAT-00764	RAABR10BXXX	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 19 x 13 in; trim protrudes 1/2 in from drywall **A**	—	39
EDH-EAT-00765	RAABR10BXXXA	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 21 x 16 in; trim protrudes 1/2 in from drywall **A**	—	39

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00887	MP40KF100-3	Occupies 3X (4.13 in (104.9 mm)) of chassis height A	—	76
EDH-EAT-00888	MP40KC225-3	Occupies 3X (4.13 in (104.9 mm)) of chassis height A	—	75
EDH-EAT-00890	MP40KJ225-3	Occupies 3X (4.13 in (104.9 mm)) of chassis height A	—	77
EDH-EAT-00891	MP40KK400-3	Occupies 4X (5.50 in (139.7 mm)) of chassis height A	—	77
EDH-EAT-00893	MP40KL600-3	Occupies 6X (8.25 in (209.6 mm)) of chassis height A	—	78
EDH-EAT-00894	MP40KM800-3	Occupies 6X (8.25 in (209.6 mm)) of chassis height A	—	79
EDH-EAT-00895	MP40KN1200-3	Occupies 6X (8.25 in (209.6 mm)) of chassis height A	—	80
EDH-EAT-00897	MP403XBLANK	3X high (3 x 1.38 in = 4.14 in) - X unit from Vol 12 C	—	145
EDH-EAT-00902	99-3613-5	Fits box 15.00 in wide x 34.00 in high (indoor) A	—	153
EDH-EAT-00903	99-3613-20	Fits box 15.00 in wide x 38.00 in high (indoor) A	—	151
EDH-EAT-00904	99-3613-9	Fits box 21.00 in wide x 54.00 in high (indoor) A	—	153
EDH-EAT-00905	99-3613-22	Fits box 15.00 in wide x 34.00 in high (indoor) A	—	151
EDH-EAT-00906	99-3613-8	Fits box 15.00 in wide x 42.00 in high (indoor) A	—	153
EDH-EAT-00907	39-3613-16	Fits box 15.00 in wide x 48.00 in high (indoor) A	—	150
EDH-EAT-00908	99-3613-29	Fits box 21.00 in wide x 63.00 in high (indoor) A	—	152
EDH-EAT-00909	99-3613-11	Fits box 15.00 in wide x 29.00 in high (indoor) A	—	150
EDH-EAT-00910	99-3613-17	Fits box 15.00 in wide x 34.00 in high (indoor) A	—	151
EDH-EAT-00911	39-3613-27	Fits box 15.00 in wide x 38.00 in high (indoor) A	—	150
EDH-EAT-00912	99-3613-4	Fits box 21.00 in wide x 54.00 in high (indoor) A	—	153
EDH-EAT-00913	99-3613-13	Fits box 15.00 in wide x 34.00 in high (indoor) A	—	151
EDH-EAT-00914	99-3613-30	Fits box 15.00 in wide x 34.00 in high (indoor) A	—	152
EDH-EAT-00915	99-3613-3	Fits box 15.00 in wide x 42.00 in high (indoor) A	—	152
EDH-EAT-00916	99-3613-28	Fits box 21.00 in wide x 63.00 in high (indoor) A	—	152
EDH-EAT-00917	PW30KT1NB	Fits 21.00 in wide box; 30.00 in high A	—	154
EDH-EAT-00918	PW34KT1NB	Fits 21.00 in wide box; 34.00 in high A	—	154
EDH-EAT-00919	PW38KT1NB	Fits 21.00 in wide box; 38.00 in high A	—	155
EDH-EAT-00920	PW34KT2NB	Fits 21.00 in wide box; 34.00 in high A	—	154
EDH-EAT-00921	PW42KT1NB	Fits 21.00 in wide box; 42.00 in high A	—	155
EDH-EAT-00922	PW50KT1NB	Fits 21.00 in wide box; 50.00 in high A	—	155
EDH-EAT-00923	PW30KT3NB	Fits 21.00 in wide box; 30.00 in high A	—	154
EDH-EAT-00944	47-15718-2	For 21.00 in (533.4 mm) wide panels (overall plate size not given) A	—	163
EDH-EAT-00945	EEEHD220015SB2	Space: 3X = 4.13 in (104.9 mm); 4X = 5.50 in (139.7 mm); 6X = 8.25 in (209.6 mm); 1X = 1.38 in (35.1 mm) A	—	114
EDH-EAT-00946	EEFPB1S1	1X high (1X = 1.38 in) A	—	116
EDH-EAT-00947	EEFPB2T2	2X high (1X = 1.38 in) A	—	117
EDH-EAT-00948	EEFPB2S1	2X high (1X = 1.38 in) A	—	116
EDH-EAT-00949	EEFPB2S2W	2X high (1X = 1.38 in) A	—	117
EDH-EAT-00950	EEFPB2S2N	2X high (1X = 1.38 in) A	—	117
EDH-EAT-00951	EEFPB3S2W	3X high (1X = 1.38 in) A	—	118
EDH-EAT-00952	EEFPB3S2N	3X high (1X = 1.38 in) A	—	117
EDH-EAT-00953	EEFPB4T2	4X high (1X = 1.38 in) A	—	119
EDH-EAT-00954	EEFPB4S1	4X high (1X = 1.38 in) A	—	118
EDH-EAT-00955	EEFPB4S2W	4X high (1X = 1.38 in) A	—	118
EDH-EAT-00956	EEFPB4S2N	4X high (1X = 1.38 in) A	—	118
EDH-EAT-00957	EEFPB5S1	5X high (1X = 1.38 in) A	—	119

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00958	EEFPB5S2W	5X high (1X = 1.38 in) A	—	119
EDH-EAT-00959	EEFPB5S2N	5X high (1X = 1.38 in) A	—	119
EDH-EAT-00960	EEFBP6T2	6X high (1X = 1.38 in) A	—	116
EDH-EAT-00961	EEFPB6S1	6X high (1X = 1.38 in) A	—	120
EDH-EAT-00962	EEFPB6S2W	6X high (1X = 1.38 in) A	—	120
EDH-EAT-00963	EEFPB6S2N	6X high (1X = 1.38 in) A	—	120
EDH-EAT-00964	EEFPB8T2	8X high (1X = 1.38 in) A	—	120
EDH-EAT-00965	EEFBP10T2	10X high (1X = 1.38 in) A	—	115
EDH-EAT-00966	EEFPB12T2	12X high (1X = 1.38 in) A	—	116
EDH-EAT-00968	KMP40KD3400	3X = 4.13 in (104.9 mm); 4X = 5.50 in (139.7 mm); 6X = 8.25 in (209.6 mm) A	—	146
EDH-EAT-00969	MP40KF100-2	Occupies 2X (2.75 in (69.9 mm)) of chassis height A	—	142
EDH-EAT-00970	MP40KF225-2	Occupies 2X (2.75 in (69.9 mm)) of chassis height A	—	142
EDH-EAT-00971	MP40KF225-3	Occupies 3X (4.13 in (104.9 mm)) of chassis height A	—	143
EDH-EAT-00972	MP40KC225-2	Occupies 2X (2.75 in (69.9 mm)) of chassis height A	—	140
EDH-EAT-00973	MP40KCHH225-2	Occupies 2X (2.75 in (69.9 mm)) of chassis height A	—	141
EDH-EAT-00974	MP40KCHH225-3	Occupies 3X (4.13 in (104.9 mm)) of chassis height A	—	141
EDH-EAT-00975	MP40KLL400-3	Occupies 6X (8.25 in (209.6 mm)) of chassis height A	—	144
EDH-EAT-00978	M50ATW3211R	Occupies 4X = 5.50 in (139.7 mm) A	—	136
EDH-EAT-00979	M50ATW3611R	Occupies 4X = 5.50 in (139.7 mm) A	—	137
EDH-EAT-00980	M50ATW3222R	Occupies 4X = 5.50 in (139.7 mm) A	—	136
EDH-EAT-00981	M50ATW3622R	Occupies 4X = 5.50 in (139.7 mm) A	—	137
EDH-EAT-00982	M50ATW3233R	Occupies 4X = 5.50 in (139.7 mm) A	—	137
EDH-EAT-00983	M50ATW3633R	Occupies 5X = 6.88 in (174.8 mm) A	—	138
EDH-EAT-00984	M50ASB324R	Occupies 6X = 8.25 in (209.6 mm) A	—	132
EDH-EAT-00985	M50ASB364R	Occupies 6X = 8.25 in (209.6 mm) A	—	132
EDH-EAT-00986	M50ASW325R	Occupies 9X = 12.38 in (314.5 mm) A	—	133
EDH-EAT-00987	M50ASW365R	Occupies 9X = 12.38 in (314.5 mm) A	—	133
EDH-EAT-00988	M50ASW326R	Occupies 11X = 15.13 in (384.3 mm) A	—	133
EDH-EAT-00989	M50ASW366R	Occupies 11X = 15.13 in (384.3 mm) A	—	134
EDH-EAT-00990	M50ASW367T	Occupies 18X = 24.75 in (628.7 mm) A	—	135
EDH-EAT-00991	M50ASW367B	Occupies 18X = 24.75 in (628.7 mm) A	—	134
EDH-EAT-00992	M50ASW368T	Occupies 19X = 26.13 in (663.7 mm) A	—	136
EDH-EAT-00993	M50ASW368B	Occupies 19X = 26.13 in (663.7 mm) A	—	135
EDH-EAT-01052	YS2036	36.00 in H x 20.00 in W x 5.75 in D (box) A	—	285
EDH-EAT-01054	YS2042	42.00 in H x 20.00 in W x 5.75 in D (box) A	—	286
EDH-EAT-01056	YS2048	48.00 in H x 20.00 in W x 5.75 in D (box) A	—	286
EDH-EAT-01058	YS2060	60.00 in H x 20.00 in W x 5.75 in D (box) A	—	286
EDH-EAT-01060	YS2072	72.00 in H x 20.00 in W x 5.75 in D (box) A	—	286
EDH-EAT-01062	YS2090	90.00 in H x 20.00 in W x 5.75 in D (box) A	—	287
EDH-EAT-01064	VWPB2024	24.00 in H x 20.00 in W x 6.00 in D A	—	284
EDH-EAT-01066	VWPB2036	36.00 in H x 20.00 in W x 6.00 in D A	—	284
EDH-EAT-01068	VWPB2048	48.00 in H x 20.00 in W x 6.00 in D A	—	284
EDH-EAT-01070	VWPB2060	60.00 in H x 20.00 in W x 6.00 in D A	—	285
EDH-EAT-01072	VWPB2072	72.00 in H x 20.00 in W x 6.00 in D A	—	285
EDH-EAT-01074	VWPB2090	90.00 in H x 20.00 in W x 6.00 in D A	—	285
EDH-EAT-01076	BX2457	57.00 in H x 24.00 in W x 10.40 in D (box); 11.30 in overall with covers A	—	484

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-01081	BX2473	73.00 in H x 24.00 in W x 10.40 in D (box); 11.30 in overall with covers A	—	484
EDH-EAT-01086	BX2490	90.00 in H x 24.00 in W x 10.40 in D (box); 11.30 in overall with covers A	—	484
EDH-EAT-01091	BX3673	73.00 in H x 36.00 in W x 10.40 in D (box); 11.30 in overall with covers A	—	485
EDH-EAT-01096	BX3690	90.00 in H x 36.00 in W x 10.40 in D (box); 11.30 in overall with covers A	—	485
EDH-EAT-01101	BX4473	73.00 in H x 44.00 in W x 10.40 in D (box); 11.30 in overall with covers A	—	485
EDH-EAT-01105	BX4490	90.00 in H x 44.00 in W x 10.40 in D (box); 11.30 in overall with covers A	—	485
EDH-EAT-01109	6555C20H01	5.00 x 57.00 in (W x H) A	—	468
EDH-EAT-01110	6555C21H01	5.00 x 73.00 in (W x H) A	—	468
EDH-EAT-01111	6555C25H01	5.00 x 90.00 in (W x H) A	—	469
EDH-EAT-01112	6555C22H01	6.00 x 73.00 in (W x H) A	—	469
EDH-EAT-01113	6555C23H01	8.00 x 73.00 in (W x H) A	—	469
EDH-EAT-01114	6555C26H01	6.00 x 90.00 in (W x H) A	—	469
EDH-EAT-01115	6555C27H01	8.00 x 90.00 in (W x H) A	—	470
EDH-EAT-01116	6555C24H01	14.00 x 73.00 in (W x H) A	—	469
EDH-EAT-01117	6555C28H01	14.00 x 90.00 in (W x H) A	—	470
EDH-EAT-01118	RPCB2457	57.00 x 24.00 x 13.90 in A	—	487
EDH-EAT-01119	DPC2457	57.00 x 24.00 x 13.90 in A	—	486
EDH-EAT-01120	RPCB2473	73.00 x 24.00 x 13.90 in A	—	487
EDH-EAT-01121	DPC2473	73.00 x 24.00 x 13.90 in A	—	486
EDH-EAT-01122	RPCB2490	90.00 x 24.00 x 13.90 in A	—	487
EDH-EAT-01123	DPC2490	90.00 x 24.00 x 13.90 in A	—	486
EDH-EAT-01124	RPCB3673	73.00 x 36.00 x 13.90 in A	—	487
EDH-EAT-01125	DPC3673	73.00 x 36.00 x 13.90 in A	—	486
EDH-EAT-01126	RPCB3690	90.00 x 36.00 x 13.90 in A	—	488
EDH-EAT-01127	DPC3690	90.00 x 36.00 x 13.90 in A	—	486
EDH-EAT-01128	6554C01H01	1 x 1.38 in high A	—	472
EDH-EAT-01129	6554C02H01	1 x 1.38 in high A	—	476
EDH-EAT-01130	6554C01H02	2 x 1.38 in high A	—	473
EDH-EAT-01131	6554C02H02	2 x 1.38 in high A	—	476
EDH-EAT-01132	6554C01H03	3 x 1.38 in high A	—	473
EDH-EAT-01133	6554C02H03	3 x 1.38 in high A	—	477
EDH-EAT-01134	6554C01H13	4 x 1.38 in high A	—	475
EDH-EAT-01135	6554C02H13	4 x 1.38 in high A	—	479
EDH-EAT-01136	6554C01H14	5 x 1.38 in high A	—	475
EDH-EAT-01137	6554C02H14	5 x 1.38 in high A	—	479
EDH-EAT-01138	6554C01H04	6 x 1.38 in high A	—	473
EDH-EAT-01139	6554C02H04	6 x 1.38 in high A	—	477
EDH-EAT-01140	6554C01H05	7 x 1.38 in high A	—	473
EDH-EAT-01141	6554C02H05	7 x 1.38 in high A	—	477
EDH-EAT-01142	6554C01H06	9 x 1.38 in high A	—	474
EDH-EAT-01143	6554C02H06	9 x 1.38 in high A	—	477
EDH-EAT-01144	6554C01H07	10 x 1.38 in high A	—	474
EDH-EAT-01145	6554C02H07	10 x 1.38 in high A	—	478
EDH-EAT-01146	6554C01H08	11 x 1.38 in high A	—	474
EDH-EAT-01147	6554C02H08	11 x 1.38 in high A	—	478
EDH-EAT-01148	6554C01H09	12 x 1.38 in high A	—	474
EDH-EAT-01149	6554C02H09	12 x 1.38 in high A	—	478
EDH-EAT-01150	6554C01H10	13 x 1.38 in high A	—	474

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-01151	6554C02H10	13 x 1.38 in high A	—	478
EDH-EAT-01152	6554C01H11	15 x 1.38 in high A	—	475
EDH-EAT-01153	6554C02H11	15 x 1.38 in high A	—	478
EDH-EAT-01154	6554C01H12	20 x 1.38 in high A	—	475
EDH-EAT-01155	6554C02H12	20 x 1.38 in high A	—	479
EDH-EAT-01201	FDPWT3211R	Switch height 4X 5.50 in A	—	500
EDH-EAT-01202	FDPWT3611R	Switch height 4X 5.50 in A	—	503
EDH-EAT-01203	FDPWT3222R	Switch height 4X 5.50 in A	—	501
EDH-EAT-01204	FDPWT3622R	Switch height 4X 5.50 in A	—	504
EDH-EAT-01205	FDPWT3233R	Switch height 4X 5.50 in A	—	502
EDH-EAT-01206	FDPWT3633R	Switch height 5X 6.88 in A	—	505
EDH-EAT-01207	FDPBS324R	Switch height 6X 8.25 in A	—	492
EDH-EAT-01208	FDPBS364R	Switch height 6X 8.25 in A	—	493
EDH-EAT-01209	FDPBT3244R	Switch height 6X 8.25 in A	—	494
EDH-EAT-01210	FDPBT3644R	Switch height 6X 8.25 in A	—	494
EDH-EAT-01211	FDPW325R	Switch height 9X 12.38 in A	—	494
EDH-EAT-01212	FDPW365R	Switch height 9X 12.38 in A	—	496
EDH-EAT-01213	FDPW326R	Switch height 11X 15.13 in A	—	495
EDH-EAT-01214	FDPW366R	Switch height 11X 15.13 in A	—	497
EDH-EAT-01215	FDPW327	Switch height 11X 15.13 in A	—	496
EDH-EAT-01216	FDPW367	Switch height 11X 15.13 in A	—	498
EDH-EAT-01217	FDPW328	Switch height 15X 20.63 in A	—	496
EDH-EAT-01218	FDPW368	Switch height 15X 20.63 in A	—	499
EDH-EAT-01232	RACH24L125I	Package/product 6.00 x 22.00 x 30.00 in; 13.2 lb C	—	32
EDH-FPE-00004	KCDP4C	Shipping weight 7 lb (aftermarket NJL1K equivalent) C	—	1857
EDH-FPE-00006	KCDP-1A	Shipping package 4 x 3 x 3 in, 1 lb (listing; not part dimensions) C	—	1866
EDH-GEA-00029	911E347P3	3X vertical (1X = 1-3/8 in per GE convention) B	—	1107
EDH-GEA-00098	AMCB4EBFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in A	—	1229
EDH-GEA-00099	AMCB4EYFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	1230
EDH-GEA-00100	AMCB4FBFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in A	—	1230
EDH-GEA-00101	AMCB4FDBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	1231
EDH-GEA-00102	AMCB4QDFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in A	—	1235
EDH-GEA-00103	AMCB4SEFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	1237
EDH-GEA-00104	AMCB6EBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	1238
EDH-GEA-00105	AMCB6EYFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	1239
EDH-GEA-00106	AMCB6FBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	1240
EDH-GEA-00107	AMCB6FDBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	1241
EDH-GEA-00108	AMCB6QDFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	1245
EDH-GEA-00109	AMCB4FJFP	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in A	—	1233
EDH-GEA-00110	AMCB6FJFP	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in A	—	1242
EDH-GEA-00111	AMCB4FJFPTF	Vertical space 2X (1X = 1-3/8 in); box width 36-44 in A	—	1233

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00112	AMCB6FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 36-44 in A	—	1243
EDH-GEA-00113	AMCB4FGBFP	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in A	—	1231
EDH-GEA-00114	AMCB4GBFP	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in A	—	1235
EDH-GEA-00115	AMCB6FGBFP	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in A	—	1241
EDH-GEA-00116	AMCB6GBFP	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in A	—	1244
EDH-GEA-00117	AMCB2FJFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	1219
EDH-GEA-00118	AMCB2FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	1219
EDH-GEA-00119	AMCB2FGMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	1217
EDH-GEA-00120	AMCB2GMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	1221
EDH-GEA-00121	AMCB3FJFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	1223
EDH-GEA-00122	AMCB3FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	1224
EDH-GEA-00123	AMCB3FGMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	1222
EDH-GEA-00124	AMCB3GMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	1225
EDH-GEA-00125	AMCB3LBFP	Vertical space 6X (1X = 1-3/8 in); box width 27-44 in A	—	1227
EDH-GEA-00126	AMCB2KMFP	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in A	—	1222
EDH-GEA-00127	AMCB3KMFP	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in A	—	1226
EDH-GEA-00128	AFP2QDD	2X vertical; box width 27-44 in A	—	1317
EDH-GEA-00129	AFP2TED	2X vertical; box width 27-44 in A	—	1317
EDH-GEA-00130	AFP3EYD	3X vertical; box width 27-44 in A	—	1318
EDH-GEA-00131	AFP2FBD	2X vertical; box width 27-44 in A	—	1316
EDH-GEA-00132	AFP3FBD	3X vertical; box width 27-44 in A	—	1318
EDH-GEA-00133	AFP3QDD	3X vertical; box width 27-44 in A	—	1319
EDH-GEA-00134	AFP3SED	3X vertical; box width 27-44 in A	—	1319
EDH-GEA-00135	AFP3SFD	3X vertical; box width 31-44 in A	—	1320
EDH-GEA-00136	AFP3TFD	2X, 3X vertical; box width 36-44 in A	—	1321
EDH-GEA-00137	AFP4FGD	4X vertical; box width 40, 44 in A	—	1321
EDH-GEA-00138	AFP4SGD	4X vertical; box width 40-44 in A	—	1323
EDH-GEA-00139	AFP3SFS	3X vertical; box width 27-44 in A	—	1320
EDH-GEA-00140	AFP3TFS	3X vertical; box width 27-44 in A	—	1321
EDH-GEA-00141	AFP4FGS	4X vertical; box width 27-44 in A	—	1322
EDH-GEA-00142	AFP4SGS	4X vertical; box width 27-44 in A	—	1323
EDH-GEA-00143	AFP5LCS	6X vertical; box width 27-44 in A	—	1324
EDH-GEA-00144	AFP6SKS	6X vertical; box width 44 in A	—	1325
EDH-GEA-00145	AMC6QBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1279
EDH-GEA-00146	AMC6EYFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1272
EDH-GEA-00147	AMC6FBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1273
EDH-GEA-00148	AMC6FDBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1274

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00149	AMC6EBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1270
EDH-GEA-00150	AMC6QDFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1280
EDH-GEA-00151	AMC6FJFPTF	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	1276
EDH-GEA-00152	AMC6FJFP	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	1275
EDH-GEA-00153	AMC6JKFP	6X vertical (1X = 1-3/8 in); box width range 44 in A	—	1278
EDH-GEA-00154	AMC6FGBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	1275
EDH-GEA-00155	AMC6GBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	1277
EDH-GEA-00156	AMC6FDSPF	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	1274
EDH-GEA-00157	AMC6EBSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	1271
EDH-GEA-00158	AMC6FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	1277
EDH-GEA-00159	AMC3FJFPTF	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1257
EDH-GEA-00160	AMC3FJFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1256
EDH-GEA-00161	AMC3JKFP	6X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1259
EDH-GEA-00162	AMC3FGMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1256
EDH-GEA-00163	AMC3GMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1258
EDH-GEA-00164	AMC3KMFP	6X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	1260
EDH-GEA-00165	AMC3FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	1258
EDH-GEA-00166	AMC4FDBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1263
EDH-GEA-00167	AMC4EBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1261
EDH-GEA-00168	AMC4SEFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1269
EDH-GEA-00169	AMC4QDFP	2X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1268
EDH-GEA-00170	AMC4FJFPTF	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	1265
EDH-GEA-00171	AMC4FJFP	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	1264
EDH-GEA-00172	AMC4JKFP	6X vertical (1X = 1-3/8 in); box width range 44 in A	—	1267
EDH-GEA-00173	AMC4FGBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	1264
EDH-GEA-00174	AMC4GBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	1267
EDH-GEA-00175	AMC4FDSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	1263
EDH-GEA-00176	AMC4EBSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	1262
EDH-GEA-00177	AMC4FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	1266
EDH-GEA-00178	AMC2FJFPTF	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1251
EDH-GEA-00179	AMC2FJFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1250

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00180	AMC2JKFP	6X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1254
EDH-GEA-00181	AMC2FGMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1250
EDH-GEA-00182	AMC2GMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	1253
EDH-GEA-00183	AMC2KMFP	6X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	1254
EDH-GEA-00184	AMC2FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	1252
EDH-GEA-00201	APP1S	1X = 1 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	1329
EDH-GEA-00202	APP1	1X = 1 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	1328
EDH-GEA-00203	APP1W	1X = 1 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	1329
EDH-GEA-00204	APP2S	2X = 2 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	1330
EDH-GEA-00205	APP2	2X = 2 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	1330
EDH-GEA-00206	APP2W	2X = 2 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	1331
EDH-GEA-00207	APP3S	3X = 3 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	1332
EDH-GEA-00208	APP3	3X = 3 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	1331
EDH-GEA-00209	APP3W	3X = 3 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	1332
EDH-GEA-00210	APP4S	4X = 4 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	1333
EDH-GEA-00211	APP4	4X = 4 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	1333
EDH-GEA-00212	APP4W	4X = 4 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	1334
EDH-GEA-00213	APP5S	5X = 5 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	1335
EDH-GEA-00214	APP5	5X = 5 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	1334
EDH-GEA-00215	APP5W	5X = 5 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	1335
EDH-GEA-00216	APP6S	6X = 6 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	1336
EDH-GEA-00217	APP6	6X = 6 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	1336
EDH-GEA-00218	APP6W	6X = 6 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	1336
EDH-GEA-00219	AML3250SFP	4X module height; box width 27, 36 in A	—	1202
EDH-GEA-00220	AML3250FP	6X module height; box width 36 in A	—	1202
EDH-GEA-00221	AML3400SFP	4X module height; box width 27, 36, 44 in A	—	1203
EDH-GEA-00222	AML3400FP	6X module height; box width 36, 44 in A	—	1203
EDH-GEA-00223	AML3600SFP	4X module height; box width 27, 36, 44 in A	—	1204
EDH-GEA-00224	AML3600FP	6X module height; box width 36, 44 in A	—	1204
EDH-GEA-00225	AML3800FP	6X module height; box width 36, 44 in A	—	1205
EDH-GEA-00226	AML3120FP	6X module height; box width 36, 44 in A	—	1201
EDH-GEA-00227	AML3250CFP	6X module height; box width 36 in A	—	1202
EDH-GEA-00228	AML3400CFP	6X module height; box width 36, 44 in A	—	1203
EDH-GEA-00229	AML3600CFP	6X module height; box width 36, 44 in A	—	1204
EDH-GEA-00230	AML3800CFP	6X module height; box width 36, 44 in A	—	1205
EDH-GEA-00231	AML3120CFP	6X module height; box width 36, 44 in A	—	1201

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00242	AFL600	9X; box width 27, 36, 44 in A	—	1206
EDH-GEA-00243	AFL120	12X; box width 36, 44 in A	—	1205
EDH-GEA-00244	AMCB6TEDL	3X = 4.125 in vertical; fits 36W/40W/44W panelboards and 40W/45W switchboards A	—	1328
EDH-GEA-00386	TEF1	Length behind back of breaker: 2 25/32 in (short) A	—	1380
EDH-GEA-00387	TEF2	Length behind back of breaker: 4 13/32 in (long) A	—	1380
EDH-GEA-00388	TEF3	Length behind back of breaker: 3 13/32 in (short) A	—	1380
EDH-GEA-00389	TEF4	Length behind back of breaker: 5 25/32 in (long) A	—	1381
EDH-GEA-00390	TFK1	Length behind back of breaker: 2 23/32 in (short) A	—	1386
EDH-GEA-00391	TFK2	Length behind back of breaker: 5 31/32 in (long) A	—	1386
EDH-GEA-00392	SGBCS1	Length behind back of breaker: 2 13/16 in (short) A	—	1445
EDH-GEA-00393	SGBCS2	Length behind back of breaker: 6 1/16 in (long) A	—	1445
EDH-GEA-00394	TKM11	Length behind back of breaker: 5 1/2 in A	—	1423
EDH-GEA-00395	TKM12	Length behind back of breaker: 8 in A	—	1423
EDH-GEA-00396	AMCB6EB	—	Outer (A, C) pole straps mounted back-to-back; leave 1.38 in (1X) between outer straps for the center (B) pole strap A	1238
EDH-GEA-00397	AMCB4SE	—	Outer (A, C) pole straps mounted back-to-back; leave 1.38 in (1X) between outer straps for the center (B) pole strap A	1236
EDH-GEA-00398	AMCB4EB	Alternate mounting bracket for four-pole 2X (2 x 1.38 in) double-branch assembly of TEB/TED breakers; both breakers in each branch fastened to center hole of each bracket A	Outer (A, C) pole straps mounted back-to-back; leave 1.38 in (1X) between outer straps for the center (B) pole strap A	1228
EDH-GEA-00403	AMCB2GM	Vertical space required 5.50 in (4X) A	—	1220
EDH-GEA-00404	AMCB3GM	Vertical space required 5.50 in (4X) A	—	1224
EDH-GEA-00405	AMCB4GB	Vertical space required 5.50 in (4X) A	—	1234
EDH-GEA-00406	AMCB6GB	Vertical space required 5.50 in (4X) A	—	1243
EDH-GEA-00444	208C4262G32	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard A	—	1306
EDH-GEA-00445	208C4262G33	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard A	—	1306
EDH-GEA-00446	208C4262G34	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard A	—	1307
EDH-GEA-00447	208C4262G35	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard A	—	1307
EDH-GEA-00448	208C4262G36	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard A	—	1308
EDH-GEA-00449	208C4262G53	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard A	—	1309
EDH-GEA-00450	208C4262G54	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard A	—	1309
EDH-GEA-00451	208C4262G55	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard A	—	1310
EDH-GEA-00452	208C4262G56	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard A	—	1310
EDH-GEA-00453	208C4262G57	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard A	—	1311
EDH-GEA-00454	208C4262G58	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard A	—	1311
EDH-GEA-00455	208C4262G59	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard A	—	1312
EDH-GEA-00456	208C4262G60	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard A	—	1313
EDH-GEA-00457	208C4262G61	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard A	—	1313

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00458	208C4262G62	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard **A**	—	1314
EDH-GEA-00459	208C4262G26	Cover height 2-3/4 in (2X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	1302
EDH-GEA-00460	208C4262G27	Cover height 2-3/4 in (2X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	1303
EDH-GEA-00461	208C4262G28	Cover height 2-3/4 in (2X); for box width: 44 in panelboard / 45 in switchboard **A**	—	1303
EDH-GEA-00462	208C4262G29	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	1304
EDH-GEA-00463	208C4262G30	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	1305
EDH-GEA-00464	208C4262G31	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard **A**	—	1305
EDH-GEA-00465	208C4262G1	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	1294
EDH-GEA-00466	208C4262G2	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	1299
EDH-GEA-00467	208C4262G3	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard **A**	—	1304
EDH-GEA-00468	208C4262G6	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	1312
EDH-GEA-00469	208C4262G7	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard **A**	—	1314
EDH-GEA-00470	208C4262G20	Cover height 2-3/4 in (2X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	1299
EDH-GEA-00471	208C4262G21	Cover height 2-3/4 in (2X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	1300
EDH-GEA-00472	208C4262G22	Cover height 2-3/4 in (2X); for box width: 44 in panelboard / 45 in switchboard **A**	—	1300
EDH-GEA-00473	208C4262G23	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	1301
EDH-GEA-00474	208C4262G24	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	1301
EDH-GEA-00475	208C4262G25	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard **A**	—	1302
EDH-GEA-00476	208C4262G10	Cover height 5-1/2 in (4X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	1295
EDH-GEA-00477	208C4262G11	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	1295
EDH-GEA-00478	208C4262G12	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard **A**	—	1295
EDH-GEA-00479	208C4262G13	Cover height 5-1/2 in (4X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	1296
EDH-GEA-00480	208C4262G14	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	1296
EDH-GEA-00481	208C4262G15	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard **A**	—	1296
EDH-GEA-00482	208C4262G16	Cover height 5-1/2 in (4X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	1297
EDH-GEA-00483	208C4262G17	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	1297
EDH-GEA-00484	208C4262G18	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard **A**	—	1298
EDH-GEA-00485	208C4262G49	Cover height 5-1/2 in (4X); for box width: 40 in wide panelboards or switchboards only (36/40 column, footnote *) **A**	—	1308
EDH-GEA-00486	208C4262G19	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard **A**	—	1298
EDH-GEA-00501	AFP10T	For box width 36, 44 in; X height per description (1X = 1-3/8 in) **A**	—	1315

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00502	AFP10X	For box width 44 in; X height per description (1X = 1-3/8 in) **A**	—	1316
EDH-GEA-00503	AFP19X	For box width 44 in; X height per description (1X = 1-3/8 in) **A**	—	1316
EDH-GEA-00504	AFP4X	For box width 44 in; X height per description (1X = 1-3/8 in) **A**	—	1324
EDH-GEA-00505	AFP5X	For box width 44 in; X height per description (1X = 1-3/8 in) **A**	—	1324
EDH-GEA-00506	AFP7T	For box width 44 in; X height per description (1X = 1-3/8 in) **A**	—	1326
EDH-GEA-00507	AFP7X2	For box width 44 in; X height per description (1X = 1-3/8 in) **A**	—	1327
EDH-GEA-00508	AFP7X	For box width 36, 44 in; X height per description (1X = 1-3/8 in) **A**	—	1326
EDH-GEA-00509	AMB2600MA	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	1191
EDH-GEA-00510	AMB3600MA	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	1199
EDH-GEA-00511	AMB2600MC	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	1192
EDH-GEA-00512	AMB3600MC	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	1200
EDH-GEA-00513	AMB2120MA	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	1188
EDH-GEA-00514	AMB3120MA	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	1196
EDH-GEA-00515	AMB3120MC	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	1196
EDH-GEA-00516	AMB2120DMC	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	1187
EDH-GEA-00517	AMB3120DMC	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	1195
EDH-GEA-00518	AMB2120DMA	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	1187
EDH-GEA-00519	AMB3120DMA	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	1194
EDH-GEA-00520	AMB2120N	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	1189
EDH-GEA-00521	AMB3120N	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	1197
EDH-GEA-00522	AMB2120DN	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	1188
EDH-GEA-00523	AMB3120DN	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	1195
EDH-GEA-00524	AMB2250CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	1189

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00525	AMB3250CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1197
EDH-GEA-00526	AMB2600CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1190
EDH-GEA-00527	AMB3600CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1198
EDH-GEA-00528	AMB2800CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1192
EDH-GEA-00529	AMB3800CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1200
EDH-GEA-00530	AMB2120CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1186
EDH-GEA-00531	AMB3120CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1193
EDH-GEA-00532	AMB2250DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1190
EDH-GEA-00533	AMB3250DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1198
EDH-GEA-00534	AMB2600DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1191
EDH-GEA-00535	AMB3600DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1199
EDH-GEA-00536	AMB2800DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1193
EDH-GEA-00537	AMB3800DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1201
EDH-GEA-00538	AMB2120DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1186
EDH-GEA-00539	AMB3120DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes A	1194
EDH-GEA-00542	APN49	—	Drill 0.120 in (#31 drill) hole at each end of the marker strip using the strip as template; strips fixed to front shield with #6-32 pan-head thread-forming screws A	1371
EDH-GEA-00543	APN99	—	Drill 0.120 in (#31 drill) hole at each end of the marker strip using the strip as template; strips fixed to front shield with #6-32 pan-head thread-forming screws A	1371
EDH-GEA-00564	SR1XBF	3X (1X = 1.385 in) A	—	1162
EDH-GEA-00565	SR2XBF	5X (1X = 1.385 in) A	—	1162
EDH-GEA-00566	SR5XBF	11X (1X = 1.385 in) A	—	1163
EDH-GEA-00608	GAVFP2	4.125 in H x 17 in W C	—	1129
EDH-GEA-00610	QMRFP3	4.125 in H x 24 in W (3X at 1.375 in) C	—	1129
EDH-GEA-00612	GAVFP3	3X, 4-1/8 in H x 17 in W C	—	1129

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00796	FCDDF1	Outline/drilling dimensions given in DEH40915 Table 2 / Figures 8-9 (e.g. 2.36 in, 2.2 in, 3.54 in, 5.54 in, 8.27 in values; letter mapping not recoverable from text rendering) C	—	1426
EDH-GEA-00797	FCDDF2	Outline/drilling dimensions given in DEH40915 Table 2 / Figures 8-9 (e.g. 2.36 in, 2.2 in, 3.54 in, 5.54 in, 8.27 in values; letter mapping not recoverable from text rendering) C	—	1427
EDH-GEA-00798	FCDDF3	Outline/drilling dimensions given in DEH40915 Table 2 / Figures 8-9 (e.g. 2.36 in, 2.2 in, 3.54 in, 5.54 in, 8.27 in values; letter mapping not recoverable from text rendering) C	—	1427
EDH-GEA-00799	FCDDF4	Outline/drilling dimensions given in DEH40915 Table 2 / Figures 8-9 (e.g. 2.36 in, 2.2 in, 3.54 in, 5.54 in, 8.27 in values; letter mapping not recoverable from text rendering) C	—	1428
EDH-GEA-00913	ACB311149	Inside 31 in W x 11.5 in D x 49.375 in H (add 1/4 in for outside); interior 15X A	—	1178
EDH-GEA-00914	ACB311153	Inside 31 in W x 11.5 in D x 53.5 in H (add 1/4 in for outside); interior 18X A	—	1178
EDH-GEA-00915	ACB311157	Inside 31 in W x 11.5 in D x 57.625 in H (add 1/4 in for outside); interior 21X A	—	1178
EDH-GEA-00916	ACB311161	Inside 31 in W x 11.5 in D x 61.75 in H (add 1/4 in for outside); interior 24X A	—	1178
EDH-GEA-00917	ACB311165	Inside 31 in W x 11.5 in D x 65.875 in H (add 1/4 in for outside); interior 27X A	—	1178
EDH-GEA-00918	ACB311170	Inside 31 in W x 11.5 in D x 70 in H (add 1/4 in for outside); interior 30X A	—	1178
EDH-GEA-00919	ACB311174	Inside 31 in W x 11.5 in D x 74.125 in H (add 1/4 in for outside); interior 33X A	—	1179
EDH-GEA-00920	ACB311178	Inside 31 in W x 11.5 in D x 78.25 in H (add 1/4 in for outside); interior 36X A	—	1179
EDH-GEA-00921	ACB311182	Inside 31 in W x 11.5 in D x 82.275 in H (add 1/4 in for outside); interior 39X A	—	1179
EDH-GEA-00922	ACB311186	Inside 31 in W x 11.5 in D x 86.5 in H (add 1/4 in for outside); interior 42X A	—	1179
EDH-GEA-00923	ACB401149	Inside 40 in W x 11.5 in D x 49.375 in H (add 1/4 in for outside); interior 15X A	—	1179
EDH-GEA-00924	ACB401153	Inside 40 in W x 11.5 in D x 53.5 in H (add 1/4 in for outside); interior 18X A	—	1179
EDH-GEA-00925	ACB401157	Inside 40 in W x 11.5 in D x 57.625 in H (add 1/4 in for outside); interior 21X A	—	1180
EDH-GEA-00926	ACB401161	Inside 40 in W x 11.5 in D x 61.75 in H (add 1/4 in for outside); interior 24X A	—	1180
EDH-GEA-00927	ACB401165	Inside 40 in W x 11.5 in D x 65.875 in H (add 1/4 in for outside); interior 27X A	—	1180
EDH-GEA-00928	ACB401170	Inside 40 in W x 11.5 in D x 70 in H (add 1/4 in for outside); interior 30X A	—	1180
EDH-GEA-00929	ACB401174	Inside 40 in W x 11.5 in D x 74.125 in H (add 1/4 in for outside); interior 33X A	—	1180
EDH-GEA-00930	ACB401178	Inside 40 in W x 11.5 in D x 78.25 in H (add 1/4 in for outside); interior 36X A	—	1180
EDH-GEA-00931	ACB401182	Inside 40 in W x 11.5 in D x 82.275 in H (add 1/4 in for outside); interior 39X A	—	1181
EDH-GEA-00932	ACB401186	Inside 40 in W x 11.5 in D x 86.5 in H (add 1/4 in for outside); interior 42X A	—	1181
EDH-GEA-01005	DASW3121	Inside 31 x 9 1/2 in W x D, box height 49 in, 15X (add 1/4 in for outside) A	—	1137
EDH-GEA-01006	DASW3127	Inside 31 x 9 1/2 in W x D, box height 57 5/8 in, 21X (add 1/4 in for outside) A	—	1137
EDH-GEA-01007	DASW3130	Inside 31 x 9 1/2 in W x D, box height 61 3/4 in, 24X (add 1/4 in for outside) A	—	1138

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-01008	DASW3133	Inside 31 x 9 1/2 in W x D, box height 65 7/8 in, 27X (add 1/4 in for outside) A	—	1138
EDH-GEA-01009	DASW3136	Inside 31 x 9 1/2 in W x D, box height 70 in, 30X (add 1/4 in for outside) A	—	1138
EDH-GEA-01010	DASW3142	Inside 31 x 9 1/2 in W x D, box height 78 1/4 in, 36X (add 1/4 in for outside) A	—	1138
EDH-GEA-01011	DACB3539	Inside 35 x 11 1/2 in W x D, box height 74 1/8 in, 33X (add 1/4 in for outside) A	—	1136
EDH-GEA-01012	DACB3545	Inside 35 x 11 1/2 in W x D, box height 82 3/8 in, 39X (add 1/4 in for outside) A	—	1136
EDH-GEA-01013	DACB4027	Inside 40 x 11 1/2 in W x D, box height 57 5/8 in, 21X (add 1/4 in for outside) A	—	1136
EDH-GEA-01014	DACB4030	Inside 40 x 11 1/2 in W x D, box height 61 3/4 in, 24X (add 1/4 in for outside) A	—	1136
EDH-GEA-01015	DACB4033	Inside 40 x 11 1/2 in W x D, box height 65 7/8 in, 27X (add 1/4 in for outside) A	—	1136
EDH-GEA-01016	DACB4036	Inside 40 x 11 1/2 in W x D, box height 70 in, 30X (add 1/4 in for outside) A	—	1136
EDH-GEA-01017	DACB4039	Inside 40 x 11 1/2 in W x D, box height 74 1/8 in, 33X (add 1/4 in for outside) A	—	1137
EDH-GEA-01018	DACB4042	Inside 40 x 11 1/2 in W x D, box height 78 1/4 in, 36X (add 1/4 in for outside) A	—	1137
EDH-GEA-01019	DACB4045	Inside 40 x 11 1/2 in W x D, box height 82 3/8 in, 39X (add 1/4 in for outside) A	—	1137
EDH-GEA-01020	DACB4048	Inside 40 x 11 1/2 in W x D, box height 86 1/2 in, 42X (add 1/4 in for outside) A	—	1137
EDH-OTH-00141	BFP1WE	1X 1.375 in H x 18-1/2 in W C	—	93
EDH-OTH-00142	BFP2WE	2X 2-3/4 in H x 18-1/2 in W C	—	93
EDH-OTH-00143	BFP3WE	3X 4-1/8 in H x 18-1/2 in W C	—	93
EDH-SIE-00011	MBKVA5363A	Breaker support location 11.23 in (top/bottom feed configurations, Fig. 2) A	—	1624
EDH-SIE-00033	LNLK5X12A	strip length 5.80 in A	—	1646
EDH-SIE-00034	LNLK7X18A	strip length 8.14 in A	—	1648
EDH-SIE-00035	LNLK4X11B	strip length 6.17 in A	—	1645
EDH-SIE-00036	LNLK6X17B	strip length 8.67 in A	—	1646
EDH-SIE-00037	LNLK7X20B	strip length 9.92 in A	—	1648
EDH-SIE-00076	DFFP3	3in high (P3 plate 2.97in) A	—	1501
EDH-SIE-00077	DFFP6	6in high (P3 plate 5.97in) A	—	1502
EDH-SIE-00080	BBKQRP1FK	6.00 in kit unit space; 2.50 in and 1.50 in connector spacing (horizontal 2-pole) A	—	1505
EDH-SIE-00086	DFK07	Center plate flange length 21 in A	—	1497
EDH-SIE-00087	DFK08	Center plate flange length 24 in A	—	1497
EDH-SIE-00102	BBKB32	Unit space: 3in / 6 circuits A	—	1483
EDH-SIE-00103	BBKVA4P2P3	Unit space: 3in / 6 circuits A	—	1489
EDH-SIE-00104	BBKED32	Unit space: 3in / 6 circuits A	—	1484
EDH-SIE-00105	BBKNB32	Unit space: 3in / 6 circuits A	—	1486
EDH-SIE-00106	BBKGB32	Unit space: 3in / 6 circuits A	—	1485
EDH-SIE-00107	BBKEB32	Unit space: 3in / 6 circuits A	—	1507
EDH-SIE-00108	BBKQR1	Unit space: 6in / 1 breaker A	—	1488
EDH-SIE-00109	BBKQR2	Unit space: 6in / 2 breakers A	—	1509
EDH-SIE-00110	BBKQ1	Unit space: 6in / 1 breaker A	—	1488
EDH-SIE-00111	BBKQ2	Requires 6 in of branch unit space (figure: 5.5 in, 2.5 in, 6.0 in) A	—	1508
EDH-SIE-00112	BBKVA5262P2S	Unit space: 6in / 1 breaker A	—	1490
EDH-SIE-00114	BBKVA52P3T	Unit space: 6in / 2 breakers A	—	1510

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00124	SBL	Unit height 3.75 in **A**	A/C straps: two 1/4-20 thread-forming screws through two 0.281 in strap holes into two 0.228 in holes in A bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; top barrier 1/4-20 x 3/8 through 0.25 in holes into 0.228 holes; branch connectors 10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker 10-24 x 3/32 (sic) screw into 0.20 in hole in breaker metal contact **A**	1533
EDH-SIE-00125	S3VA41T	Unit height 3.75 in **A**	A/C runbacks on two 0.228 in holes in A/C bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets into 0.228 in Z-rail hole 1.88 in below top **A**	1526
EDH-SIE-00126	SGB2	Unit height 3.75 in **A**	A/C runbacks on two 0.228 in holes in A (and C) bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets 1/4-20 x 3/8 into 0.228 in Z-rail holes 1.88 in below top of unit space **A**	1543
EDH-SIE-00127	SE6	Unit height 3.75 in **A**	—	1539
EDH-SIE-00128	SCE	Unit height 3.75 in **A**	—	1535
EDH-SIE-00129	S3VA52T	Unit height 5.00 in **A**	—	1527
EDH-SIE-00130	SDGD	Unit height 5.00 in **A**	B-phase strap into two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A and C straps into 0.228 in holes 1-1/4 in (A) / 3.75 in (C) down; B links (offset 0.281 holes) with 1/4-20 x 1-1/4 screws; breaker line contacts 10-24 socket head cap screws into 0.173 in holes of phase links; mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; load side two 8-32 screws into tapped bracket holes; barrier christmas-tree rivet 0.25 in hole into 0.156 in hole of B strap; provision barrier 10-24 SHCS through 0.228 hole into 0.173 hole of B link **A**	1538
EDH-SIE-00131	SQR	Unit height 5.00 in **A**	Straps on two 0.228 in holes in section bus 1-1/4 in down from top of 5.0 in unit space (B then A), C-phase two 0.228 in holes 2.50 in below; link bars via 0.281 in holes; breaker ON-side contacts 1/4-20 x 5/8 into 0.228 in holes at link bar ends; QR mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; breaker OFF-side 1/4-20 x 2-3/4 into 0.228 in bracket holes **A**	1551

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00132	SFG	Unit height 5.00 in **A**	B strap two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A straps 1-1/4 in down, C straps 3.75 in down; B links via 0.281 in holes (offset, not symmetrical); mounting brackets 1/4-20 x 3/8 through 0.312 in hole into 0.228 Z-rail hole 5/8 in below A-strap screws; breaker line contacts 1/4-20 SHCS + washer into 0.228 in link holes; load side 8-32 screws into tapped bracket holes; barrier rivet 0.25 in into 0.156 in hole of B strap **A**	1541
EDH-SIE-00133	SF6	Unit height 5.00 in **A**	—	1540
EDH-SIE-00134	SCF	Unit height 5.00 in **A**	—	1536
EDH-SIE-00135	S3VA53T	Unit height 6.25 in **A**	—	1529
EDH-SIE-00136	S3VA63T	Unit height 6.25 in **A**	—	1532
EDH-SIE-00137	SJG	Unit height 6.25 in **A**	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes **A**	1545
EDH-SIE-00138	SJ1	Unit height 8.75 in **A**	Support barrier at 0.228 Z-rail holes 3-1/8in from top and bottom of 8-3/4in unit space (1/4-20x1/2); phase connectors four 1/4-20 thread-forming via 0.312 into 0.228 bus holes; bracket 1/4-20x9/16 through 0.438 holes into threaded inserts on support barrier; breaker line one 5/16-18x1-1/8 per contact; load two 1/4-20x2-3/4 thread-forming into 0.228 holes **A**	1544
EDH-SIE-00139	SCJ	Unit height 8.75 in **A**	—	1536
EDH-SIE-00140	SSJ1	Unit height 8.75 in **A**	Support barrier at 0.228 Z-rail holes 3-1/8in from top and bottom of 8-3/4in unit space (1/4-20x1/2); phase connectors four 1/4-20 thread-forming via 0.312 into 0.228 bus holes; bracket 1/4-20x9/16 through 0.438 holes into threaded inserts on support barrier; breaker line one 5/16-18x1-1/8 per contact; load two 1/4-20x2-3/4 thread-forming into 0.228 holes **A**	1554
EDH-SIE-00141	SSCJ	Unit height 8.75 in **A**	—	1552
EDH-SIE-00142	S3VA54T	Unit height 6.25 in **A**	—	1531
EDH-SIE-00143	S3VA64T	Unit height 6.25 in **A**	—	1533
EDH-SIE-00144	SLG	Unit height 6.25 in **A**	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes **A**	1547

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00145	SL6	Unit height 8.75 in **A**	Support barrier at 0.228 Z-rail holes 3-1/8in from top and bottom of 8-3/4in unit space (1/4-20x1/2); phase connectors four 1/4-20 thread-forming via 0.312 into 0.228 bus holes; bracket 1/4-20x9/16 through 0.438 holes into threaded inserts on support barrier; breaker line one 5/16-18x1-1/8 per contact; load two 1/4-20x2-3/4 thread-forming into 0.228 holes **A**	1546
EDH-SIE-00146	SCL	Unit height 8.75 in **A**	—	1537
EDH-SIE-00147	SSL6	Unit height 8.75 in **A**	Support barrier at 0.228 Z-rail holes 3-1/8in from top and bottom of 8-3/4in unit space (1/4-20x1/2); phase connectors four 1/4-20 thread-forming via 0.312 into 0.228 bus holes; bracket 1/4-20x9/16 through 0.438 holes into threaded inserts on support barrier; breaker line one 5/16-18x1-1/8 per contact; load two 1/4-20x2-3/4 thread-forming into 0.228 holes **A**	1555
EDH-SIE-00148	SSCL	Unit height 8.75 in **A**	—	1553
EDH-SIE-00149	MG1	Unit height 8.75 in **A**	—	1525
EDH-SIE-00150	SBLBD	Unit height 3.75 in **A**	A/C straps: two 1/4-20 thread-forming screws through two 0.281 in strap holes into two 0.228 in holes in A bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; top barrier 1/4-20 x 3/8 through 0.25 in holes into 0.228 holes; branch connectors 10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker 10-24 x 3/32 (sic) screw into 0.20 in hole in breaker metal contact **A**	1534
EDH-SIE-00151	S3VA41TD	Unit height 3.75 in **A**	A/C runbacks on two 0.228 in holes in A/C bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets into 0.228 in Z-rail hole 1.88 in below top **A**	1527
EDH-SIE-00152	S3VA41TDHD	Unit height 7.50 in **A**	Locate 0.228 in hole in A-phase bus 1.25 in down from top of the 7.5 in unit space **A**	1577
EDH-SIE-00153	SGB2D	Unit height 3.75 in **A**	A/C runbacks on two 0.228 in holes in A (and C) bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets 1/4-20 x 3/8 into 0.228 in Z-rail holes 1.88 in below top of unit space **A**	1543
EDH-SIE-00154	SE6D	Unit height 3.75 in **A**	—	1586
EDH-SIE-00155	6CLE2	Unit height 3.75 in **A**	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes **A**	1563
EDH-SIE-00156	S3VA52TD	Unit height 5.00 in **A**	—	1528

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00157	6QR2	Unit height 5 / 5.00 in **A**	Straps on two 0.228 in holes in section bus 1-1/4 in down from top of 5.0 in unit space (B then A), C-phase two 0.228 in holes 2.50 in below; link bars via 0.281 in holes; breaker ON-side contacts 1/4-20 x 5/8 into 0.228 in holes at link bar ends; QR mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; breaker OFF-side 1/4-20 x 2-3/4 into 0.228 in bracket holes **A**	1520
EDH-SIE-00158	SFGD	Unit height 5.00 in **A**	B strap two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A straps 1-1/4 in down, C straps 3.75 in down; B links via 0.281 in holes (offset, not symmetrical); mounting brackets 1/4-20 x 3/8 through 0.312 in hole into 0.228 Z-rail hole 5/8 in below A-strap screws; breaker line contacts 1/4-20 SHCS + washer into 0.228 in link holes; load side 8-32 screws into tapped bracket holes; barrier rivet 0.25 in into 0.156 in hole of B strap **A**	1542
EDH-SIE-00159	SF6D	Unit height 5.00 in **A**	—	1586
EDH-SIE-00160	SCFD	Unit height 5.00 in **A**	—	1583
EDH-SIE-00161	S3VA53TD	Unit height 6.25 in **A**	—	1530
EDH-SIE-00162	S3VA63TD	Unit height 6.25 in **A**	—	1581
EDH-SIE-00163	SJG2D	Unit height 6.25 in **A**	B strap two 0.228 in holes in B-phase bus 5.00 in down from top of 6.25 in unit space; A straps 1-1/4 in down; C straps 5.00 in down; B link half-punch into 0.218 in hole of B strap, 5/16-18 screw through 0.375 in link hole into 0.281 in strap hole; breaker line contacts 5/16-18 into 0.281 in strap holes; mounting brackets on 0.228 in Z-rail holes 1.875 in down; breaker load end 1/4-20 x 3-3/4 into 0.228 in bracket holes **A**	1589
EDH-SIE-00164	SJG1D	Unit height 6.25 in **A**	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes **A**	1545
EDH-SIE-00165	SJ1D	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	1587
EDH-SIE-00166	SJ2D	Unit height 8.75 in **A**	—	1588
EDH-SIE-00167	SCJD	Unit height 8.75 in **A**	—	1583
EDH-SIE-00168	S3VA54TD	Unit height 6.25 in **A**	—	1531

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00169	S3VA64TD	Unit height 6.25 in **A**	—	1582
EDH-SIE-00170	SLGD	Unit height 6.25 in **A**	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes **A**	1548
EDH-SIE-00171	SL6D	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	1590
EDH-SIE-00172	SCLD	Unit height 8.75 in **A**	—	1584
EDH-SIE-00173	SSL6D	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	1596
EDH-SIE-00174	SSCLD	Unit height 8.75 in **A**	—	1594
EDH-SIE-00175	MG1D	Unit height 8.75 in **A**	—	1525
EDH-SIE-00176	SLM1D	Unit height 8.75 in **A**	—	1549
EDH-SIE-00177	SMND	Unit height 10 / 10.00 in **A**	Phase bracket at 0.228 Z-rail holes 3-1/8in down from top and up from bottom of 10in unit space (1/4-20x1/2 via 0.312 holes); phase connectors four 1/4-20 thread-forming each via 0.312 into 0.228 bus holes; breaker line: two 5/16-18x1-3/8 thread-forming per contact into 0.284 holes; load: two 1/4-20 thread-forming via 0.69 holes into 0.228 holes in breaker mount **A**	1591
EDH-SIE-00178	SSMND	Unit height 10 / 10.00 in **A**	—	1597
EDH-SIE-00179	NG1D	Unit height 10 / 10.00 in **A**	Phase bracket at 0.228 Z-rail holes 3-1/8in down from top and up from bottom of 10in unit space (1/4-20x1/2 via 0.312 holes); phase connectors four 1/4-20 thread-forming each via 0.312 into 0.228 bus holes; breaker line: two 5/16-18x1-3/8 thread-forming per contact into 0.284 holes; load: two 1/4-20 thread-forming via 0.69 holes (step 7 text says 1/4-20x1-1/2; parts table lists 1/4-20x3-3/4) into 0.228 holes in breaker mount **A**	1576
EDH-SIE-00180	SCED	Unit height 3.75 in **A**	—	1582

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00181	SQRD	Unit height 5.00 in **A**	Straps on two 0.228 in holes in section bus 1-1/4 in down from top of 5.0 in unit space (B then A), C-phase two 0.228 in holes 2.50 in below; link bars via 0.281 in holes; breaker ON-side contacts 1/4-20 x 5/8 into 0.228 in holes at link bar ends; QR mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; breaker OFF-side 1/4-20 x 2-3/4 into 0.228 in bracket holes **A**	1552
EDH-SIE-00182	S3VA53T2D	Unit height 6.25 in **A**	B-phase strap: four 1/4-20 screws through strap into B bus; A/C straps four 1/4-20 screws each **A**	1578
EDH-SIE-00183	SSJ1D	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	1595
EDH-SIE-00184	SSCJD	Unit height 8.75 in **A**	—	1593
EDH-SIE-00185	S3VA54T2D	Unit height 6.25 in **A**	B-phase strap: four 1/4-20 screws through strap into B bus; A/C straps four 1/4-20 screws each **A**	1579
EDH-SIE-00186	S3VA55TD	Unit height 8.75 in **A**	—	1580
EDH-SIE-00187	S3VA57TD	Unit height 10.00 in **A**	Straps land on bus mounting holes, four screws per phase, strap assembly vertically centered in 10 in unit space **A**	1580
EDH-SIE-00188	6E62	Unit height 3.75 in **A**	—	1565
EDH-SIE-00189	6QJ2	Unit height 5 in **A**	B strap 1-1/4in below top of 5.0in unit space, two 1/4-20 thread-forming into 0.228 holes; C strap 2.50in below A/B screws; QJ bracket at 0.228 Z-rail hole 5/8in below A-strap screws via 0.312 bracket holes; link bars 0.281 holes, 1.50in between centres; breaker line: 1/4-20x5/8 into each contact; load: two 1/4-20x2-3/4 thread-forming into bracket 0.228 holes **A**	1572
EDH-SIE-00190	6F62	Unit height 5 in **A**	—	1567
EDH-SIE-00191	6CLF1	Unit height 5 in **A**	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes **A**	1721
EDH-SIE-00192	6JJ61	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	1568
EDH-SIE-00193	6JJ62	Unit height 8.75 in **A**	—	1569

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00194	6CLJ1	Unit height 8.75 in **A**	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes **A**	1722
EDH-SIE-00195	6SJL1	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	1573
EDH-SIE-00196	6SCJ1	Unit height 8.75 in **A**	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes **A**	1726
EDH-SIE-00197	6LL61	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	1570
EDH-SIE-00198	6CLL1	Unit height 8.75 in **A**	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes **A**	1724
EDH-SIE-00199	6SLL1	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	1574
EDH-SIE-00200	6SCL1	Unit height 8.75 in **A**	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes **A**	1727
EDH-SIE-00201	6BL2C	Unit height 3.75 in **A**	—	1711
EDH-SIE-00202	6SCL61C	Unit height 8.75 in **A**	—	1713
EDH-SIE-00203	6M61C	Unit height 10 in **A**	—	1712
EDH-SIE-00204	6N61C	Unit height 10 in **A**	—	1712
EDH-SIE-00211	6FPB01	1.25in unit height **A**	—	1557
EDH-SIE-00212	6FPB02	2.5in unit height **A**	—	1558
EDH-SIE-00213	6FPB03	3.75in unit height **A**	—	1558
EDH-SIE-00214	6FPB05	5in unit height **A**	—	1559

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00215	6FPB10	10in unit height A	—	1559
EDH-SIE-00216	6FPB15	15.00in (381mm) A	—	1732
EDH-SIE-00222	SEBP5V3	Bracket on base rail X from nearest end: X = 5.63 in (200A), 4.38 in (400A) A	—	1600
EDH-SIE-00226	SEBKRP1V3	—	Bracket mounts to pair of base-rail holes 2 in apart at interior corner; OUTER bracket holes for BL/BQD, INNER for xGB A	1668
EDH-SIE-00227	SEBKRP1V4	—	Inner pair of bracket holes aligned to base-rail holes 2 in apart A	1668
EDH-SIE-00231	SEBKP1P2P3V1	—	Mounting hole legend: RP1 holes A&D #10-24; P2 std A&D #8-32; P2 SEM3 A&B #8-32; P3 C&E #8-32 (symmetrical both sides); offsets 1 in (JD), 1.5 in (CJD/CLD), 2 in (LD); 2.50 in (JD/CJD) or 3.00 in (LD/CLD); SEM3 P2: remove perforated ~1-7/8 x 6-1/8 in piece A	1666
EDH-SIE-00235	SEBKP2V4	Mounted X above (top-fed) or below breaker support: X = 2.00 in FD/CFD in P2, 1.50 in QJ/QR in P2 A	—	1494
EDH-SIE-00237	SEBKP2V6	Mount 1 in above/below breaker support A	—	1495
EDH-SIE-00239	SEBKP3V1	X = 1.63 in from breaker support (1.00 in breaker support to P3 adapter mount hole) A	—	1512
EDH-SIE-00240	EWK1	20in W x 5.75in D A	—	1680
EDH-SIE-00241	EWK2	24in W x 7.75in D A	—	1681
EDH-SIE-00242	EWK3	20in W x 5.75in D A	—	1681
EDH-SIE-00243	EWK1B	20in W x 5.75in D A	—	1680
EDH-SIE-00244	EWK2B	24in W x 7.75in D A	—	1681
EDH-SIE-00289	NDTS	Breaker overall length 24 in with lug shields vs 16 in without (W 9, D 6, D1 8.25) A	—	1800
EDH-SIE-00299	RS2643	Extension behind breaker 2.38 in A	—	1766
EDH-SIE-00300	RS2644	Extension behind breaker 2.38 in A	—	1767
EDH-SIE-00301	RS2641	Extension behind breaker 4.88 in A	—	1765
EDH-SIE-00302	RS2642	Extension behind breaker 4.88 in A	—	1766
EDH-SIE-00303	RS4756	Extension behind breaker 3.12 in A	Drill to clear .50in dia stud; 3-pole 1.50/1.50in; 2-pole 3.00in A	1772
EDH-SIE-00304	RS4755	Extension behind breaker 7.06 in A	Drill to clear .50in dia stud; 3-pole 1.50/1.50in; 2-pole 3.00in A	1771
EDH-SIE-00305	RS5774	Extension behind breaker 5.85 in A	—	1781
EDH-SIE-00306	RS5773	Extension behind breaker 11.20 in A	—	1780
EDH-SIE-00307	RS5784	Extension behind breaker 5.85 in A	—	1783
EDH-SIE-00308	RS5783	Extension behind breaker 11.20 in A	—	1783
EDH-SIE-00309	RS5788	Extension behind breaker 5.85 in A	—	1786
EDH-SIE-00310	RS5787	Extension behind breaker 11.20 in A	—	1786
EDH-SIE-00311	RS5786	Extension behind breaker 5.50 in A	—	1801
EDH-SIE-00312	RS5785	Extension behind breaker 8.00 in A	—	1800
EDH-SIE-00328	K-11-D-2551-01	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in A	—	1654
EDH-SIE-00329	K-11-D-2551-02	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in A	—	1654
EDH-SIE-00330	K-11-D-2551-03	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in A	—	1655

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00331	K-11-D-2551-04	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1655
EDH-SIE-00332	K-11-D-2551-05	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1655
EDH-SIE-00333	K-11-D-2553-01	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1657
EDH-SIE-00334	K-11-D-2553-02	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1658
EDH-SIE-00335	K-11-D-2553-03	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1658
EDH-SIE-00336	K-11-D-2553-04	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1658
EDH-SIE-00337	K-11-D-2553-05	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1659
EDH-SIE-00338	K-11-D-2550-01	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1652
EDH-SIE-00339	K-11-D-2550-02	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1653
EDH-SIE-00340	K-11-D-2550-03	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1653
EDH-SIE-00341	K-11-D-2550-04	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1653
EDH-SIE-00342	K-11-D-2550-05	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1654
EDH-SIE-00343	K-11-D-2552-01	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1656
EDH-SIE-00344	K-11-D-2552-02	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1656
EDH-SIE-00345	K-11-D-2552-03	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1656
EDH-SIE-00346	K-11-D-2552-04	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1657

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00347	K-11-D-2552-05	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1657
EDH-SIE-00348	SEB	Requires 3-3/4 in of unit space **A**	A/C straps: two 0.281 in holes, fastened with 1/4-20 thread-forming screws into two 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C-phase strap 1-1/4 in down from A holes; B strap into 0.228 holes in B bus 1-1/4 in down; mounting brackets with 1/4-20 x 5/8 screws through 0.312 in hole into 0.228 in Z-rail hole 5/8 in below top of unit space; line connectors to breaker 10-24 x 5/8 into 0.203 in hole; barrier 1/4-20 x 3/8 through 0.25 in holes into 0.218 in holes of line connector **A**	1539
EDH-SIE-00349	SEBD	Requires 3-3/4 in of unit space **A**	A/C straps: two 0.281 in holes, fastened with 1/4-20 thread-forming screws into two 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C-phase strap 1-1/4 in down from A holes; B strap into 0.228 holes in B bus 1-1/4 in down; mounting brackets with 1/4-20 x 5/8 screws through 0.312 in hole into 0.228 in Z-rail hole 5/8 in below top of unit space; line connectors to breaker 10-24 x 5/8 into 0.203 in hole; barrier 1/4-20 x 3/8 through 0.25 in holes into 0.218 in holes of line connector **A**	1540
EDH-SIE-00350	SDG	Requires 5 in of unit space; A/C link bars 1.375 in vertically between centers **A**	B-phase strap into two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A and C straps into 0.228 in holes 1-1/4 in (A) / 3.75 in (C) down; B links (offset 0.281 holes) with 1/4-20 x 1-1/4 screws; breaker line contacts 10-24 socket head cap screws into 0.173 in holes of phase links; mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; load side two 8-32 screws into tapped bracket holes; barrier christmas-tree rivet 0.25 in hole into 0.156 in hole of B strap; provision barrier 10-24 SHCS through 0.228 hole into 0.173 hole of B link **A**	1730
EDH-SIE-00352	SNB	Requires 3-3/4 in of unit space **A**	A/C straps: two 1/4-20 thread-forming screws through 0.281 in strap holes into 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 0.228 in holes 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; branch connectors #10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker line tabs #10-32 washer head screws **A**	1730

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00353	SNBD	Requires 3-3/4 in of unit space **A**	A/C straps: two 1/4-20 thread-forming screws through 0.281 in strap holes into 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 0.228 in holes 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; branch connectors #10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker line tabs #10-32 washer head screws **A**	1550
EDH-SIE-00354	11-5570-01	—	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes **A**	1719
EDH-SIE-00355	11-5570-02	—	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes **A**	1720
EDH-SIE-00356	SMBKL6	—	P5: support barrier assembly via 0.228 in Z-rail holes 1.875 in down from top of unit space; phase connectors (short/medium/long) four 1/4-20 x 1-1/4 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker mounts via 0.312 holes into 0.228 holes; P4: breaker mounting bracket 1/4-20 x 1/2 through 0.438 in holes into threaded inserts on strap support barrier (item 8 brackets omitted in P4) **A**	1517
EDH-SIE-00357	SMBKL6D	—	P5: support barrier assembly via 0.228 in Z-rail holes 1.875 in down from top of unit space; phase connectors (short/medium/long) four 1/4-20 x 1-1/4 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker mounts via 0.312 holes into 0.228 holes; P4: breaker mounting bracket 1/4-20 x 1/2 through 0.438 in holes into threaded inserts on strap support barrier (item 8 brackets omitted in P4) **A**	1517
EDH-SIE-00358	SMBKLG	Uses 6-1/4 in unit space; main position 15 in from top (or bottom) of Z-rail **A**	Long connector two 0.228 in section-bus holes 1-1/4 in down; center connector four 1/4-20 x 1-1/4 screws at 2.5 in mark; short connector 0.228 holes 5.0 in down; breaker mount 0.228 in Z-rail hole 1-7/8 in down; breaker load contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; line end 1/4-20 x 3-3/4 into 0.228 in bracket holes **A**	1518
EDH-SIE-00359	SMBKLG1D	Uses 6-1/4 in unit space; main position 15 in from top (or bottom) of Z-rail **A**	Long connector two 0.228 in section-bus holes 1-1/4 in down; center connector four 1/4-20 x 1-1/4 screws at 2.5 in mark; short connector 0.228 holes 5.0 in down; breaker mount 0.228 in Z-rail hole 1-7/8 in down; breaker load contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; line end 1/4-20 x 3-3/4 into 0.228 in bracket holes **A**	1518

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00360	SMBKMG	—	P5: support barrier 0.228 in Z-rail hole 1.875 in down; P4: 3.125 in down; phase straps four 1/4-20 x 1-1/4 thread-forming screws through 0.312 holes into 0.228 section-bus holes; breaker load contacts 3/8-16 x 1.25 machine screw + Belleville washer into 0.344 in holes at strap ends; line side 1/4-20 x 4-1/4 into 0.228 in holes in support barrier **A**	1518
EDH-SIE-00361	SMBKMG1D	—	P5: support barrier 0.228 in Z-rail hole 1.875 in down; P4: 3.125 in down; phase straps four 1/4-20 x 1-1/4 thread-forming screws through 0.312 holes into 0.228 section-bus holes; breaker load contacts 3/8-16 x 1.25 machine screw + Belleville washer into 0.344 in holes at strap ends; line side 1/4-20 x 4-1/4 into 0.228 in holes in support barrier **A**	1518
EDH-SIE-00362	SMLK12	—	Lug elevation 13.75 in from top (or bottom) of Z-rail aligning with 0.228 in section-bus holes; four 1/4-20 x 1-3/4 screws per lug through lug 4-hole pattern; 1.69 in minimum clearance between lug and section bus; lugs on end of section bus closest to neutral **A**	1519
EDH-SIE-00379	DFK09	Center plate flange length 27 in **A**	—	1497
EDH-SIE-00380	DFK10	Center plate flange length 30 in **A**	—	1498
EDH-SIE-00381	DFK11	Center plate flange length 33 in **A**	—	1498
EDH-SIE-00382	DFK12	Center plate flange length 36 in **A**	—	1498
EDH-SIE-00383	DFK13	Center plate flange length 39 in **A**	—	1499
EDH-SIE-00384	DFK14	Center plate flange length 42 in **A**	—	1499
EDH-SIE-00385	DFK15	Center plate flange length 45 in **A**	—	1499
EDH-SIE-00386	DFK16	Center plate flange length 48 in **A**	—	1499
EDH-SIE-00387	DFK17	Center plate flange length 51 in **A**	—	1500
EDH-SIE-00388	DFK18	Center plate flange length 54 in **A**	—	1500
EDH-SIE-00389	DFK19	Center plate flange length 57 in **A**	—	1500
EDH-SIE-00390	DFK20	Center plate flange length 60 in **A**	—	1500
EDH-SIE-00391	DFK21	Center plate flange length 63 in **A**	—	1501
EDH-SIE-00393	LPLOCK01A	For door holes 3.120 in (+0.005/-0.000) H x 1.135 in (+0.005/-0.000) W **A**	—	1703
EDH-SIE-00394	LPLOCK02A	For door holes 3.120 in (+0.005/-0.000) H x 1.135 in (+0.005/-0.000) W **A**	—	1703
EDH-SIE-00400	F602	0.312 in dia (4) holes, 0.375 in dia (3) holes; 1.250 / 2.500 / 3.750 / 5.000 in; 0.625 in; 17.000 in overall **A**	—	1523
EDH-SIE-00401	F657	17.000 in overall **A**	—	1524
EDH-SIE-00402	F671	17.000 in overall **A**	—	1524
EDH-SIE-00442	VB610	Fig 4: 4-3/8, 3-5/8, 3-5/8, 16in, 8-3/4, 3-3/8, 5/8in **A**	Support bracket hole 5/8in down from top / up from bottom of 10in unit space into 0.228 dia Z-rail holes (1/4-20x3/8 thread-forming); unit line falls between two 0.228 holes; switch brackets have 1/4in hole + 3/8in open-end slot; 7/32in dia holes for 1/4-20x1 thread-forming; Series 5 .406 holes take 5/16 insert, branch bus drilled min .344 **A**	1730
EDH-SIE-00445	K-11-D-2555-01	Bus length L = 15"; dimension A = 8"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1660

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00446	K-11-D-2557-01	Bus length L = 15"; dimension A = 8"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1663
EDH-SIE-00447	K-11-D-2555-02	Bus length L = 21"; dimension A = 11"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1661
EDH-SIE-00448	K-11-D-2557-02	Bus length L = 21"; dimension A = 11"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1663
EDH-SIE-00449	K-11-D-2555-03	Bus length L = 27"; dimension A = 14"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1661
EDH-SIE-00450	K-11-D-2557-03	Bus length L = 27"; dimension A = 14"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1664
EDH-SIE-00451	K-11-D-2555-04	Bus length L = 33"; dimension A = 17"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1661
EDH-SIE-00452	K-11-D-2557-04	Bus length L = 33"; dimension A = 17"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1664
EDH-SIE-00453	K-11-D-2554-01	Bus length L = 15"; dimension A = 8"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1659
EDH-SIE-00454	K-11-D-2556-01	Bus length L = 15"; dimension A = 8"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1662
EDH-SIE-00455	K-11-D-2554-02	Bus length L = 21"; dimension A = 11"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1659
EDH-SIE-00456	K-11-D-2556-02	Bus length L = 21"; dimension A = 11"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1662

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00457	K-11-D-2554-03	Bus length L = 27"; dimension A = 14"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1660
EDH-SIE-00458	K-11-D-2556-03	Bus length L = 27"; dimension A = 14"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1662
EDH-SIE-00459	K-11-D-2554-04	Bus length L = 33"; dimension A = 17"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1660
EDH-SIE-00460	K-11-D-2556-04	Bus length L = 33"; dimension A = 17"; main-end breaker kit mounting holes 23.63in, subfeed end 13.13in, 12.63in typical; 2.00/3.00in hole offsets; 1.57in between panel bus and base; 4.37in to back of deadfront; deadfront cut-outs 2.156/2.313in, 4.313in **A**	—	1663
EDH-SIE-00461	VB6150	Unit 17.000in high (16.000in mounting rail), 15.000in wide, 10.500in deep; .625 flange; insert locations 6 places at 1.250/3.750/1.250/2.500/1.250/3.750/1.250; .375 dia holes **A**	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes **A**	1736
EDH-SIE-00462	VB657	Location dims: 5in unit A=5.000 B=1.250; 7.5in unit A=7.500 B=2.500; .625 offsets, 1.250; switch 17.000in wide, 6.750/10.500in deep **A**	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes; When connecting switch bus to branch bus a 5/16 insert is required in aluminum (only) branch bus; with multiple units each mounting bracket supports one corner of two units **A**	1736
EDH-SIE-00463	VB671	7.5in unit A=7.500 B=2.500; 10in unit A=10.000 B=3.750; .625, 1.250; switch 17.000in wide, 6.750/10.500in deep **A**	Series 5 bus: .406 dia holes in interior horizontal bus - press 5/16-18 insert flush with back of bus bar; drill branch bus min .344 dia for 5/16-18 bolts. Series 6 vertical bus: .228 dia holes; When connecting switch bus to branch bus a 5/16 insert is required in aluminum (only) branch bus; with multiple units each mounting bracket supports one corner of two units **A**	1738
EDH-SIE-00464	F672	Fig 4: 1-1/4, 3-3/4, 3-3/4, 5/8in within 10in unit **A**	Truss screw + spacer form mounting stud in first 7/32in dia Z-rail hole 5/8in below top of 10in unit space; support brackets 1/4in hole + 3/8in open-end slot; 1/4-20x1 thread-forming into 7/32 Z-rail holes at bottom corners; A/C phase via 5/16-18x1-1/2 HWH screws, B phase through centre after removing cover **A**	1560
EDH-SIE-00465	F672D	Fig 4: 4-3/8, 3-5/8, 3-5/8, 16in, 8-3/4, 3-3/8, 3-3/8, 5/8in **A**	Support bracket hole 5/8in from top and bottom of 10in unit space, 1/4-20x3/8 thread-forming into Z-rail; switch connectors to interior bus with 1/4-20 thread-forming screws **A**	1603
EDH-SIE-00466	F6150D	17.000in high (16.000 mounting rail), 15.000in wide, 10.500in deep; .625 edges; .375 dia holes; insert locations 6 places (1.25 / 3.75 / 2.5in pitch) **A**	—	1602

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00467	F6162D	Connector/bracket positions from 0.00 datum: 1.25, 4.38, 5.63, 7.50, 10.63, 11.88, 13.75, 16.25in. Horizontal-mount drawing: 15.00in line/load, 17.00/17.22in width, 2x 3/8-16 tapped holes, 2x .34 thru, 5x .228 through, 2.70in max available terminal surface, 13.00in filler plate A	Threaded inserts tapped into underside of connectors; supports to Z-rail with two 1/4-20x3/8 HWH thread-forming; connector screws vary with number of bus laminations A	1602
EDH-SIE-00468	SMSKHCP	—	Strap assembly top 15in from top (or bottom) of Z-rail; long connectors at 0.228 section-bus hole 1.25in below unit-space top, medium 8.75in, short 13.75in (1/4-20x1-1/4 through 0.312 holes); HCP bracket support at 0.228 Z-rail hole 5.625in down; inserts into 0.406 holes; carriage bolt through 0.437 square opening; ground ring terminals on 0.171 holes A	1562
EDH-SIE-00469	SQJD	5.00in unit space; 1.25, 2.50, 1.50in A	B strap 1-1/4in below top of 5.0in unit space, two 1/4-20 thread-forming into 0.228 holes; C strap 2.50in below A/B screws; QJ bracket at 0.228 Z-rail hole 5/8in below A-strap screws via 0.312 bracket holes; link bars 0.281 holes, 1.50in between centres; breaker line: 1/4-20x5/8 into each contact; load: two 1/4-20x2-3/4 thread-forming into bracket 0.228 holes A	1593
EDH-SIE-00470	SQJ	5.00in unit space; 1.25, 2.50, 1.50in A	B strap 1-1/4in below top of 5.0in unit space, two 1/4-20 thread-forming into 0.228 holes; C strap 2.50in below A/B screws; QJ bracket at 0.228 Z-rail hole 5/8in below A-strap screws via 0.312 bracket holes; link bars 0.281 holes, 1.50in between centres; breaker line: 1/4-20x5/8 into each contact; load: two 1/4-20x2-3/4 thread-forming into bracket 0.228 holes A	1551
EDH-SIE-00489	PC5777	—	.375 [9.53] dia mounting holes (4); .344 x .75 slots (4); 1.25, 1.75, 2.50, 1.125in spacing A	1778
EDH-SIE-00490	PC5778	—	.375 [9.53] dia mounting holes (4); .344 x .75 slots (4); 1.25, 1.75, 2.50, 1.125in spacing A	1778
EDH-SIE-00491	PC5660	—	.375 [9.53] dia mounting holes (4); .344 x .75 slots (4); 1.25, 1.75, 2.50, 1.125in spacing A	1782
EDH-SIE-00492	PC5661	—	.375 [9.53] dia mounting holes (4); .344 x .75 slots (4); 1.25, 1.75, 2.50, 1.125in spacing A	1782
EDH-SIE-00495	CS3637R	DIM X = 3.03in, DIM Y = 5.25in (Fig. 2); 1.500in typ pole pitch, 3.000in; 16.00in, 9.00in, 3.50in, 6.750in min, 2.25, .75, 1.810, 1.281, 1.437, 2.41in; breaker outline 14.25in A	5/16-18 UNC tapped hole x .81 deep at breaker end; positioning template per line A Fig. 3 (3.000in spacing); two 5/16-18 bolts per strap to template A	1598
EDH-SIE-00496	CS3638R	DIM X = 6.53in, DIM Y = 8.75in (Fig. 2); 1.500in typ pole pitch, 3.000in; 16.00in, 9.00in, 3.50in, 6.750in min, 2.25, .75, 1.810, 1.281, 1.437, 2.41in; breaker outline 14.25in A	5/16-18 UNC tapped hole x .81 deep at breaker end; positioning template per line A Fig. 3 (3.000in spacing); two 5/16-18 bolts per strap to template A	1598
EDH-SIE-00497	CS3639R	DIM X = 10.03in, DIM Y = 12.25in (Fig. 2); 1.500in typ pole pitch, 3.000in; 16.00in, 9.00in, 3.50in, 6.750in min, 2.25, .75, 1.810, 1.281, 1.437, 2.41in; breaker outline 14.25in A	5/16-18 UNC tapped hole x .81 deep at breaker end; positioning template per line A Fig. 3 (3.000in spacing); two 5/16-18 bolts per strap to template A	1599
EDH-SIE-00520	MB9301	3.06in (mounting figures 2 and 3) A	—	1805
EDH-SIE-00521	MBR9302	3.06in (mounting figures 2 and 3) A	—	1806
EDH-SIE-00522	MM9301	3.06in (mounting figures 2 and 3) A	—	1805
EDH-SIE-00523	MM9302	3.06in (mounting figures 2 and 3) A	—	1806
EDH-SIE-00528	CQDSMK	Mounting hole template on sheet; 1.00in standoff A	—	1751

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00529	CQDFMB1	—	Template: (4) .145 dia holes for #6-32 screws; breaker escutcheon cut-out 2.28in x 1.00in; 5.25in overall, 1.41in A	1751
EDH-SIE-00530	CQDFMB2	—	Template: (4) .145 dia holes for #6-32 screws; breaker escutcheon cut-out 2.28in x 2.00in; 5.25in overall, 1.41in A	1751
EDH-SIE-00531	CQDFMB3	—	Template: (4) .145 dia holes for #6-32 screws; breaker escutcheon cut-out 2.28in x 3.00in; 5.25in overall, 1.41in A	1751
EDH-SIE-00661	PLL44	Location dimension A (bracket height): PUG 48.56in, WPUG 50.88in; 1.25in offset A	Support bracket ('Z' shape) secured to rear of pull section with 1/4-20x3/4 carriage bolts and nuts through two 5/16in holes; lug assembly to bracket with 1/4-20x5/8 thread-forming screws (lugs facing up) A	1739
EDH-SIE-00662	PLL46	Location dimension A (bracket height): PUG 48.56in, WPUG 50.88in; 1.25in offset A	Support bracket ('Z' shape) secured to rear of pull section with 1/4-20x3/4 carriage bolts and nuts through two 5/16in holes; lug assembly to bracket with 1/4-20x5/8 thread-forming screws (lugs facing up) A	1740
EDH-SIE-00663	PLL48	Location dimension A (bracket height): PUG 48.56in, WPUG 50.88in; 1.25in offset A	Support bracket ('Z' shape) secured to rear of pull section with 1/4-20x3/4 carriage bolts and nuts through two 5/16in holes; lug assembly to bracket with 1/4-20x5/8 thread-forming screws (lugs facing up) A	1740
EDH-SQD-00008	NQSFL1	Wire range per phase one #6-2/0 Al/Cu in and out A	—	832
EDH-SQD-00009	NQSFL2	Wire range per phase one 1/0-350 kcmil Al/Cu A	—	833
EDH-SQD-00010	NQSFL4	Wire range per phase one 1/0-750 kcmil Cu only A	—	833
EDH-SQD-00011	NQFTL2L	Wire range per phase one #6-350 Al/Cu A	—	835
EDH-SQD-00012	NQFTL2H	Wire range per phase one #6-350 Al/Cu A	—	834
EDH-SQD-00013	NQFTL4L	Wire range per phase one 1/0-750 or two 1/0-350 Al/Cu A	—	836
EDH-SQD-00014	NQFTL4H	Wire range per phase one 1/0-750 or two 1/0-350 Al/Cu A	—	835
EDH-SQD-00020	NQNL1	space factor 0 A	—	840
EDH-SQD-00021	NQNL2	space factor 0 A	—	841
EDH-SQD-00022	NQNL2ACCY	space factor 6 in. A	—	841
EDH-SQD-00023	NQNL4	space factor 0 A	—	842
EDH-SQD-00029	NQALV1	Lug wire range: one #8-1/0 (AWG-kcmil) A	—	826
EDH-SQD-00030	NQCUM1	Lug wire range: one #6-2/0 (AWG-kcmil) A	—	828
EDH-SQD-00031	NQCUV1	Lug wire range: one #6-1/0 (AWG-kcmil) A	—	830
EDH-SQD-00032	NQALV2	Lug wire range: one #4-300 (AWG-kcmil) A	—	827
EDH-SQD-00033	NQCUM2	Lug wire range: one #6-250 (AWG-kcmil) A	—	829
EDH-SQD-00034	NQCUV2	Lug wire range: one 2/0-300 (AWG-kcmil) A	—	831
EDH-SQD-00035	NQALV4	Lug wire range: two 2/0-500 (AWG-kcmil) A	—	827
EDH-SQD-00036	NQCUM4	Lug wire range: one 1/0-750 or two 1/0-350 (AWG-kcmil) A	—	829
EDH-SQD-00037	NQCUV4	Lug wire range: one 400-700 (AWG-kcmil) A	—	831
EDH-SQD-00038	NQALV6	Lug wire range: two 2/0-500 (AWG-kcmil) A	—	828
EDH-SQD-00039	NQCUM6	Lug wire range: (not printed) (AWG-kcmil) A	—	830
EDH-SQD-00040	NQCUV6	Lug wire range: two 250-500 (AWG-kcmil) A	—	832
EDH-SQD-00092	NFALV1	Lug wire range one #4-300 kcmil A	—	795
EDH-SQD-00093	NFCUM1	Lug wire range #6-2/0 A	—	797
EDH-SQD-00094	NFCUV1	Lug wire range one #6-1/0 A	—	799
EDH-SQD-00095	NFALV2	Lug wire range one 250-350 kcmil A	—	795
EDH-SQD-00096	NFCUM2	Lug wire range #6-250 kcmil A	—	797

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00097	NFCUV2	Lug wire range one 2/0-300 kcmil A	—	799
EDH-SQD-00098	NFALV4	Lug wire range two 2/0-500 kcmil A	—	796
EDH-SQD-00099	NFCUM4	Lug wire range one 1/0-750 or two 1/0-350 A	—	798
EDH-SQD-00100	NFCUV4	Lug wire range one 400-750 kcmil A	—	800
EDH-SQD-00101	NFALV6	Lug wire range two 2/0-500 kcmil A	—	796
EDH-SQD-00102	NFCUM6	Lug wire range two 1/0-750 kcmil A	—	798
EDH-SQD-00103	NFCUV6	Lug wire range two 250-500 kcmil A	—	800
EDH-SQD-00114	NFNQCRBOND46	Strap heights 1.4 in. (100%) and 1.7 in. (200%) A	—	815
EDH-SQD-00136	MH62D9	20 in. W x 8.75 in. D; height 62 in. (box catalog number = height) A	—	865
EDH-SQD-00137	MH68D9	20 in. W x 8.75 in. D; height 68 in. (box catalog number = height) A	—	866
EDH-SQD-00138	MH74D9	20 in. W x 8.75 in. D; height 74 in. (box catalog number = height) A	—	868
EDH-SQD-00139	MH80D9	20 in. W x 8.75 in. D; height 80 in. (box catalog number = height) A	—	869
EDH-SQD-00140	MH86D9	20 in. W x 8.75 in. D; height 86 in. (box catalog number = height) A	—	870
EDH-SQD-00141	MH92D9	20 in. W x 8.75 in. D; height 92 in. (box catalog number = height) B	—	871
EDH-SQD-00142	HNM1BL	1.5 in. mounting height A	—	747
EDH-SQD-00143	HNM4BL	4.5 in. mounting height A	—	748
EDH-SQD-00144	HLW1BL	1.5 in. (38.1 mm) mounting height A	—	745
EDH-SQD-00145	HLW4BL	4.5 in. (114.3 mm) mounting height A	—	746
EDH-SQD-00146	HLN1BL	1.5 in. (38.1 mm) mounting height A	—	743
EDH-SQD-00147	HLN4BL	4.5 in. (114.3 mm) mounting height A	—	744
EDH-SQD-00148	HLW4EBL	4.5 in. (114.3 mm) mounting height A	—	746
EDH-SQD-00149	HLN4EBL	4.5 in. (114.3 mm) mounting height A	—	744
EDH-SQD-00162	HC2SN	Main terminals (1) 6-300 kcmil; branch terminals (1) 6-300, (9) #1/0-14, (45) #4-14 A	—	719
EDH-SQD-00163	HC4SN	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (45) #4-14 A	—	720
EDH-SQD-00164	HC6SN	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14 A	—	720
EDH-SQD-00165	HC8SN	Main terminals (4) 3/0-750 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	721
EDH-SQD-00166	HCPSU8SN	Main terminals (4) 3/0-600 kcmil; branch terminals (4) 3/0-600, (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	724
EDH-SQD-00167	HCW4SN	Main terminals (2) 4-600 kcmil; branch terminals (2) 4-600, (7) 6-350, (45) #4-14 A	—	728
EDH-SQD-00168	HCW6SN	Main terminals (2) 4-600 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	729
EDH-SQD-00169	HCW8SN	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	730
EDH-SQD-00170	HCW12SN	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	727
EDH-SQD-00171	HCWM12SN	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	730
EDH-SQD-00172	HC6SNALCU	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14 A	—	721
EDH-SQD-00173	HC8SNALCU	Main terminals (4) 3/0-750 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	722
EDH-SQD-00174	HCPSU8SNALCU	Main terminals (4) 3/0-600 kcmil; branch terminals (4) 3/0-600, (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	724
EDH-SQD-00175	HCP4SNALCU	Main terminals (2) 4-600 kcmil; branch terminals (2) 4-600, (7) 6-350, (45) #4-14 A	—	723
EDH-SQD-00176	HCP6SNALCU	Main terminals (2) 4-600 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	723

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00177	HCP8SNALCU	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	724
EDH-SQD-00178	HCP12SNALCU	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	722
EDH-SQD-00179	HCR12SNALCU	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	725
EDH-SQD-00180	HC6SNCU	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14 A	—	721
EDH-SQD-00181	HC8SNCU	Main terminals (4) 3/0-750 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14 A	—	722
EDH-SQD-00182	HCPSU8SNCU	Main terminals (4) 3/0-600 kcmil; branch terminals (4) 3/0-600, (7) 6-350, (9) #1/0-14, (28) #4-14 A	—	725
EDH-SQD-00183	HCW4SNCU	Main terminals (2) 4-600 kcmil; branch terminals (2) 2-600, (7) 6-350, (9) #1/0-14, (28) #4-14 A	—	728
EDH-SQD-00184	HCW6SNCU	Main terminals (2) 4-600 kcmil; branch terminals (2) 2-600, (7) 6-350, (9) #1/0-14, (28) #4-14 A	—	729
EDH-SQD-00185	HCW8SNCU	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (28) #4-14 A	—	730
EDH-SQD-00186	HCP12SNCU	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (28) #4-14 A	—	723
EDH-SQD-00187	HCW12SNCU	Main terminals (8) 250-500 kcmil (crimp); branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14 A	—	727
EDH-SQD-00188	HCR12SNCU	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (28) #4-14 A	—	726
EDH-SQD-00190	ILHCJ27ESN	Terminations added: +20 (#14-2/0), +10 (#6-350) A	—	731
EDH-SQD-00191	ILHCJ1ESN	Terminations added: +30 (#14-2/0), +16 (#6-350) A	—	731
EDH-SQD-00192	ILHCJ2ESN	Terminations added: +30 (#14-2/0), +32 (#6-350); not with PowerPacT L vertical main A	—	732
EDH-SQD-00193	ILHCPSU1ESN	Terminations added: +30 (#14-2/0), +16 (#6-350), +7 (2/0-750) A	—	734
EDH-SQD-00194	ILHCPSU2ESN	Terminations added: +21 (2/0-750) A	—	734
EDH-SQD-00195	ILHCPRU1ESN	Terminations added: +30 (#14-2/0), +16 (#6-350), +8 (2/0-750) A	—	732
EDH-SQD-00196	ILHCPRU2ESN	Terminations added: +16 (#6-350), +16 (2/0-750) A	—	733
EDH-SQD-00197	ILHCJ1ESNC	Terminations added: +18 (#14-4), +9 (#14-1/0), +14 (#6-350); not in 27 in. HCJ A	—	731
EDH-SQD-00198	ILHCJ2ESNC	Terminations added: +21 (#6-350); not in 27 in. HCJ; not with PowerPacT L vertical main A	—	732
EDH-SQD-00199	ILHCPSU1ESNC	Terminations added: +18 (#14-4), +9 (#14-1/0), +14 (#6-350) A	—	734
EDH-SQD-00200	ILHCPSU2ESNC	Terminations added: +21 (#6-350) A	—	735
EDH-SQD-00201	ILHCPRU1ESNC	Terminations added: +14 (#6-350), +3 (#2-600) A	—	733
EDH-SQD-00202	ILHCPRU2ESNC	Terminations added: +21 (#6-350) A	—	733
EDH-SQD-00210	SL250	Mounting height 5 in. (114 mm); lug wire (1) #4 AWG-300 kcmil A	—	711
EDH-SQD-00211	SL400	Mounting height 6 in. (152 mm); lug wire (1) #1 AWG-600 kcmil or 2 #1-250 kcmil A	—	711
EDH-SQD-00212	SL800M5	Mounting height 9 in. (229 mm); lug wire (3) #3/0-500 kcmil A	—	713
EDH-SQD-00213	S33930	Mounting height 15 in. (381 mm); lug wire (4) #3/0-600 kcmil A	—	707
EDH-SQD-00214	SL1200P5	Mounting height 9 in. (229 mm); lug wire (4) #3/0-500 kcmil A	—	709
EDH-SQD-00215	SL1200P6	Mounting height 9 in. (229 mm); lug wire (3) 350-600 kcmil A	—	709
EDH-SQD-00216	SL1200P7	Mounting height 9 in. (229 mm); lug wire (3) #3/0-750 kcmil A	—	710

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00217	S33931	lug wire (4) #3/0-600 kcmil Al/Cu A	—	707
EDH-SQD-00218	SL100	lug wire #14-1/0 Cu or #12-1/0 Al A	—	708
EDH-SQD-00221	QMB221TW	Unit mounting height 4.5 in. (114 mm) A	—	945
EDH-SQD-00222	QMB221HW	Unit mounting height 4.5 in. (114 mm) A	—	944
EDH-SQD-00223	QMB222TW	Unit mounting height 4.5 in. (114 mm) A	—	946
EDH-SQD-00224	QMB222HW	Unit mounting height 4.5 in. (114 mm) A	—	945
EDH-SQD-00225	QMB223TW	Unit mounting height 6 in. (152 mm) A	—	947
EDH-SQD-00226	QMB223HW	Unit mounting height 6 in. (152 mm) A	—	946
EDH-SQD-00227	QMB224W	Unit mounting height 9 in. (229 mm) A	—	947
EDH-SQD-00228	QMB225W	Unit mounting height 15 in. (381 mm) A	—	948
EDH-SQD-00229	QMB225WT3	Unit mounting height 9 in. (229 mm) A	—	948
EDH-SQD-00230	QMB321TW	Unit mounting height 4.5 in. (114 mm) A	—	953
EDH-SQD-00231	QMB321HW	Unit mounting height 4.5 in. (114 mm) A	—	952
EDH-SQD-00232	QMB322TW	Unit mounting height 4.5 in. (114 mm) A	—	953
EDH-SQD-00233	QMB322HW	Unit mounting height 4.5 in. (114 mm) A	—	953
EDH-SQD-00234	QMB323TW	Unit mounting height 6 in. (152 mm) A	—	955
EDH-SQD-00235	QMB323HW	Unit mounting height 6 in. (152 mm) A	—	954
EDH-SQD-00236	QMB324W	Unit mounting height 9 in. (229 mm) A	—	956
EDH-SQD-00237	QMB325W	Unit mounting height 15 in. (381 mm) A	—	957
EDH-SQD-00238	QMB325WT3	Unit mounting height 9 in. (229 mm) A	—	957
EDH-SQD-00239	QMB326W	Unit mounting height 15 in. (381 mm) A	—	958
EDH-SQD-00240	QMB326WT3	Unit mounting height 15 in. (381 mm) A	—	959
EDH-SQD-00241	QMB327WT3	Unit mounting height 15 in. (381 mm) A	—	959
EDH-SQD-00242	QMB261TW	Unit mounting height 4.5 in. (114 mm) A	—	949
EDH-SQD-00243	QMB261HW	Unit mounting height 4.5 in. (114 mm) A	—	949
EDH-SQD-00244	QMB262TW	Unit mounting height 6 in. (152 mm) A	—	950
EDH-SQD-00245	QMB262HW	Unit mounting height 6 in. (152 mm) A	—	950
EDH-SQD-00246	QMB263TW	Unit mounting height 7.5 in. (191 mm) A	—	951
EDH-SQD-00247	QMB263HW	Unit mounting height 7.5 in. (191 mm) A	—	951
EDH-SQD-00248	QMB264W	Unit mounting height 9 in. (229 mm) A	—	952
EDH-SQD-00249	QMB361TW	Unit mounting height 4.5 in. (114 mm) A	—	960
EDH-SQD-00250	QMB361HW	Unit mounting height 4.5 in. (114 mm) A	—	960
EDH-SQD-00251	QMB362TW	Unit mounting height 6 in. (152 mm) A	—	962
EDH-SQD-00252	QMB362HW	Unit mounting height 6 in. (152 mm) A	—	961
EDH-SQD-00253	QMB362T21W	Unit mounting height 6 in. (152 mm) A	—	961
EDH-SQD-00254	QMB363TW	Unit mounting height 7.5 in. (191 mm) A	—	964
EDH-SQD-00255	QMB363HW	Unit mounting height 7.5 in. (191 mm) A	—	962
EDH-SQD-00256	QMB363T31W	Unit mounting height 7.5 in. (191 mm) A	—	963
EDH-SQD-00257	QMB363T32W	Unit mounting height 7.5 in. (191 mm) A	—	964
EDH-SQD-00258	QMB364W	Unit mounting height 9 in. (229 mm) A	—	965
EDH-SQD-00259	QMB365W	Unit mounting height 15 in. (381 mm) A	—	966
EDH-SQD-00260	QMB365WT6	Unit mounting height 9 in. (229 mm) A	—	966
EDH-SQD-00261	QMB366W	Unit mounting height 15 in. (381 mm) A	—	967
EDH-SQD-00262	QMB367W	Unit mounting height 15 in. (381 mm) A	—	968
EDH-SQD-00263	QMB368W	Mounting height 24 in. (610 mm) for 1200 A single switch in QED-2 A	—	999
EDH-SQD-00264	QMJ361T	Unit mounting height 4.5 in. (114 mm) A	—	968
EDH-SQD-00265	QMJ362T	Unit mounting height 6 in. (152 mm) A	—	969
EDH-SQD-00266	QMJ363T	Unit mounting height 6 in. (152 mm) A	—	970
EDH-SQD-00267	QMJ363H	Unit mounting height 6 in. (152 mm) A	—	969
EDH-SQD-00268	QMJ364T	Unit mounting height 7.5 in. (191 mm) A	—	971
EDH-SQD-00269	QMJ364H	Unit mounting height 7.5 in. (191 mm) A	—	970

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00270	QMJ365	Unit mounting height 9 in. (229 mm) A	—	971
EDH-SQD-00271	QMJ366	Unit mounting height 15 in. (381 mm) A	—	972
EDH-SQD-00309	QMB1BLW	Covers 1.5 in. of QMB mounting space A	—	933
EDH-SQD-00310	QMB3BLW	Covers 3 in. of QMB mounting space A	—	933
EDH-SQD-00311	QMB6BLW	Covers 6 in. of QMB mounting space A	—	934
EDH-SQD-00312	QMB15BLW	Package 2.30 x 16.00 x 26.00 in., 9.04 lb (packaged) A	—	933
EDH-SQD-00445	S37446	dimension B (extension past breaker end) = 0.50 in A	—	1025
EDH-SQD-00446	S37447	dimension B (extension past breaker end) = 0.50 in A	—	1026
EDH-SQD-00447	S37448	dimension B (extension past breaker end) = 0.24 in A	—	1031
EDH-SQD-00448	S37449	dimension B (extension past breaker end) = 2.24 in A	—	1026
EDH-SQD-00449	S37450	dimension B (extension past breaker end) = 1.68 in A	—	1031
EDH-SQD-00472	VC100FA	Dimension A (max extension past end of breaker) 1.3 in A	—	1007
EDH-SQD-00473	VC250KA3	Dimension A (max extension past end of breaker) 1.5 in A	—	1009
EDH-SQD-00474	VC250KA35	Dimension A (max extension past end of breaker) 1.5 in A	—	1010
EDH-SQD-00475	VC400LA35	Dimension A (max extension past end of breaker) 1.25 in A	—	1013
EDH-SQD-00476	VC400LA3	Dimension A (max extension past end of breaker) 1.0 in A	—	1013
EDH-SQD-00477	VC400LA5	Dimension A (max extension past end of breaker) 2.2 in A	—	1013
EDH-SQD-00478	VC400LA7	Dimension A (max extension past end of breaker) 2.5 in A	—	1014
EDH-SQD-00479	VC600LI3	Dimension A (max extension past end of breaker) 1.05 in A	—	1017
EDH-SQD-00480	VC600LI5	Dimension A (max extension past end of breaker) 3.20 in A	—	1017
EDH-SQD-00481	VC600LI7	Dimension A (max extension past end of breaker) 3.45 in A	—	1018
EDH-SQD-00482	CVC100FA	Dimension A (max extension past end of breaker) 1.4 in A	—	1006
EDH-SQD-00483	CVC250KA3	Dimension A (max extension past end of breaker) 1.5 in A	—	1009
EDH-SQD-00484	CVC400LA3	Dimension A (max extension past end of breaker) 1.3 in A	—	1011
EDH-SQD-00485	CVC400LA5	Dimension A (max extension past end of breaker) 2.3 in A	—	1011
EDH-SQD-00486	CVC600LI5	Dimension A (max extension past end of breaker) 3.20 in A	—	1017
EDH-SQD-00487	PDC6FA6	Dimension A 1.0 in A	—	1007
EDH-SQD-00488	PDC3FA2	Dimension A 1.2 in A	—	1007
EDH-SQD-00489	PDC6LA20	Dimension A 2.25 in A	—	1012
EDH-SQD-00490	PDC12LA4	Dimension A 1.25 in A	—	1012
EDH-SQD-00491	PDC4LA250	Dimension A 2.0 in A	—	1012
EDH-SQD-00492	PDC5DG20	Dimension A 1.28-1.31 in A	—	1021
EDH-SQD-00493	PDC12DG4	Dimension A 1.28-1.31 in A	—	1021
EDH-SQD-00561	HNM-3BL	3 in high B	—	748
EDH-SQD-00564	QM-1BL	1-1/2 in high B	—	982
EDH-SQD-00565	QM-3BL	3 in high B	—	982
EDH-SQD-00566	QM-6BL	6 in high B	—	982

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00567	QM-9BL	9 in high B	—	982
EDH-SQD-00632	MH23	20 in W x 5.75 in D x 23 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	916
EDH-SQD-00633	MH26	20 in W x 5.75 in D x 26 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	861
EDH-SQD-00634	MH29	20 in W x 5.75 in D x 29 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	916
EDH-SQD-00635	MH32	20 in W x 5.75 in D x 32 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	861
EDH-SQD-00636	MH35	20 in W x 5.75 in D x 35 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	917
EDH-SQD-00637	MH38	20 in W x 5.75 in D x 38 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	862
EDH-SQD-00638	MH41	20 in W x 5.75 in D x 41 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	917
EDH-SQD-00639	MH44	20 in W x 5.75 in D x 44 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	863
EDH-SQD-00640	MH50	20 in W x 5.75 in D x 50 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	863
EDH-SQD-00641	MH53	20 in W x 5.75 in D x 53 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	918
EDH-SQD-00642	MH56	20 in W x 5.75 in D x 56 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	864
EDH-SQD-00643	MH59	20 in W x 5.75 in D x 59 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	918
EDH-SQD-00644	MH62	20 in W x 5.75 in D x 62 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	865
EDH-SQD-00645	MH65	20 in W x 5.75 in D x 65 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	919
EDH-SQD-00646	MH68	20 in W x 5.75 in D x 68 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	866
EDH-SQD-00647	MH74	20 in W x 5.75 in D x 74 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	867
EDH-SQD-00648	MH77	20 in W x 5.75 in D x 77 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	920
EDH-SQD-00649	MH80	20 in W x 5.75 in D x 80 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	868
EDH-SQD-00650	MH86	20 in W x 5.75 in D x 86 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	869
EDH-SQD-00651	MH92	20 in W x 5.75 in D x 92 in H (nominal; detailed dims per PBA600 / PBA711 drawings) A	—	870
EDH-SQD-00652	MH23WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	916
EDH-SQD-00653	MH26WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	861
EDH-SQD-00654	MH29WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	916
EDH-SQD-00655	MH32WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	862
EDH-SQD-00656	MH35WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	917
EDH-SQD-00657	MH38WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	862
EDH-SQD-00658	MH41WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	917

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00659	MH44WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	863
EDH-SQD-00660	MH50WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	864
EDH-SQD-00661	MH53WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	918
EDH-SQD-00662	MH56WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	864
EDH-SQD-00663	MH59WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	918
EDH-SQD-00664	MH62WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	866
EDH-SQD-00665	MH65WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	919
EDH-SQD-00666	MH68WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	867
EDH-SQD-00667	MH74WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	868
EDH-SQD-00668	MH77WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	920
EDH-SQD-00669	MH80WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	869
EDH-SQD-00670	MH86WP	20 in W x 5.75 in D nominal (Digest 2026: 20 in W x 5.75 in D; 2009 NQOD tables: 20 in W x 6.5 in D) A	—	870
EDH-SQD-00735	NQB520	14 in W x 5.75 in D x 20 in H (nominal) A	—	921
EDH-SQD-00736	NQB523	14 in W x 5.75 in D x 23 in H (nominal) A	—	921
EDH-SQD-00737	NQB526	14 in W x 5.75 in D x 26 in H (nominal) A	—	921
EDH-SQD-00738	NQB529	14 in W x 5.75 in D x 29 in H (nominal) A	—	921
EDH-SQD-00739	NQB532	14 in W x 5.75 in D x 32 in H (nominal) A	—	873
EDH-SQD-00740	NQB535	14 in W x 5.75 in D x 35 in H (nominal) A	—	921
EDH-SQD-00741	NQB538	14 in W x 5.75 in D x 38 in H (nominal) A	—	873
EDH-SQD-00742	NQB541	14 in W x 5.75 in D x 41 in H (nominal) A	—	922
EDH-SQD-00743	NQB544	14 in W x 5.75 in D x 44 in H (nominal) A	—	873
EDH-SQD-00744	NQB550	14 in W x 5.75 in D x 50 in H (nominal) A	—	874
EDH-SQD-00745	NQB556	14 in W x 5.75 in D x 56 in H (nominal) A	—	922
EDH-SQD-00766	HC4250WP	H x W x D = 50 x 43.19 x 12.95 in A	—	769
EDH-SQD-00767	HC4259WP	H x W x D = 59 x 43.19 x 12.95 in A	—	769
EDH-SQD-00768	HC4268WP	H x W x D = 68 x 43.19 x 12.95 in A	—	770
EDH-SQD-00769	HC4286WP	H x W x D = 86 x 43.19 x 12.95 in A	—	770
EDH-SQD-00770	HC4486WP	H x W x D = 86 x 45.19 x 14.63 in A	—	771
EDH-SQD-00792	HCT2DH32D9	Box width 32 in, depth 9.5 in A	—	772
EDH-SQD-00793	HCT2DH42	Box width 42 in, depth 9.5 in A	—	772
EDH-SQD-00794	HCT2DH26D9	Box width 26 in, depth 9.5 in A	—	772
EDH-SQD-00795	HCT2DH47	Box width 47 in, depth 9.5 in A	—	773
EDH-SQD-00796	HCT2DH56	Box width 56 in, depth 9.5 in A	—	773
EDH-SQD-00797	HCT2DH42D12	Box width 42 in, depth 12.5 in A	—	772
EDH-SQD-00798	HCT2DH44	Box width 44 in, depth 9.5 in A	—	773

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00799	HCT2DH49	Box width 49 in, depth 9.5 in A	—	773
EDH-SQD-00800	HCT2DH58	Box width 58 in, depth 9.5 in A	—	774
EDH-SQD-00801	HCT2DH44D12	Box width 44 in, depth 12.5 in A	—	773
EDH-SQD-00802	NQC-20TF	Fits box 14 in W x 4 in D x 20-1/4 in H A	—	896
EDH-SQD-00803	NQC-24TF	Fits box 14 in W x 4 in D x 24-1/4 in H (MLO); 14 x 5-3/4 x 24-1/4 (NQO-24-123M MCB) A	—	896
EDH-SQD-00804	NQC-28TF	Fits box 14 in W x 4 in D x 28 in H (MLO); 14 x 5-3/4 x 28 (MCB) A	—	897
EDH-SQD-00805	NQC-32TF	Fits box 14 in W x 4 in D x 32-1/2 in H A	—	897
EDH-SQD-00806	NQC-37TF	Fits box 14 in W x 4 in D x 37-3/4 in H (MLO); 14 x 5-3/4 x 37-3/4 (MCB) A	—	897
EDH-SQD-00807	NQC-42TF	Fits box 14 in W x 5-3/4 in D x 42-1/4 in H A	—	898
EDH-SQD-00808	NQC-48TF	Fits box 14 in W x 5-3/4 in D x 48-3/4 in H A	—	898
EDH-SQD-00809	MDC-38TF	Fits box 20 in W x 5-3/4 in D x 38 in H A	—	893
EDH-SQD-00810	MDC-41TF	Fits box 20 in W x 5-3/4 in D x 41 in H A	—	893
EDH-SQD-00811	MDC-50TF	Fits box 20 in W x 5-3/4 in D x 50 in H A	—	893
EDH-SQD-00812	MDC-53TF	Fits box 20 in W x 5-3/4 in D x 53 in H A	—	894
EDH-SQD-00813	MSC-23TF	Fits box 20 in W x 5-3/4 in D x 23 in H A	—	894
EDH-SQD-00814	MSC-26TF	Fits box 20 in W x 5-3/4 in D x 26 in H A	—	894
EDH-SQD-00815	MSC-29TF	Fits box 20 in W x 5-3/4 in D x 29 in H A	—	895
EDH-SQD-00816	MSC-35TF	Fits box 20 in W x 5-3/4 in D x 35 in H A	—	895
EDH-SQD-00817	MSC-38TF	Fits box 20 in W x 5-3/4 in D x 38 in H A	—	895
EDH-SQD-00818	MSC-44TF	Fits box 20 in W x 5-3/4 in D x 44 in H A	—	896
EDH-SQD-00819	LX-26TF	Fits box column width 8-5/8 in W x 5 in D x 26-1/2 in H A	—	891
EDH-SQD-00820	LX-32TF	Fits box column width 8-5/8 in W x 5 in D x 32-1/2 in H A	—	891
EDH-SQD-00821	LX-40TF	Fits box column width 8-5/8 in W x 5 in D x 40 in H A	—	892
EDH-SQD-00822	LX-45TF	Fits box column width (box H assumed 45 in; not printed on p.58 for 3-phase) C	—	892
EDH-SQD-00823	LX-49TF	Fits box column width 8-5/8 in W x 5 in D x 49 in H A	—	892
EDH-SQD-00824	HC-2636-B	26 x 6-1/4 in W x D x 36 in H A	—	760
EDH-SQD-00826	HC-2645-B	26 x 6-1/4 in W x D x 45 in H A	—	761
EDH-SQD-00828	HC-2654-B	26 x 6-1/4 in W x D x 54 in H A	—	761
EDH-SQD-00830	HC-2663-B	26 x 6-1/4 in W x D x 63 in H A	—	761
EDH-SQD-00832	HC-2672-B	26 x 6-1/4 in W x D x 72 in H A	—	762
EDH-SQD-00834	HC-2690-B	26 x 6-1/4 in W x D x 90 in H A	—	762
EDH-SQD-00836	HC-3238-B	32 x 8 in W x D x 38 in H A	—	763
EDH-SQD-00838	HC-3247-B	32 x 8 in W x D x 47 in H A	—	764
EDH-SQD-00840	HC-3256-B	32 x 8 in W x D x 56 in H A	—	764
EDH-SQD-00842	HC-3274-B	32 x 8 in W x D x 74 in H A	—	765
EDH-SQD-00844	HC-3292-B	32 x 8 in W x D x 92 in H A	—	765
EDH-SQD-00846	HC-4144-B	41 x 8 in W x D x 44 in H A	—	766
EDH-SQD-00848	HC-4153-B	41 x 8 in W x D x 53 in H A	—	767
EDH-SQD-00850	HC-4162-B	41 x 8 in W x D x 62 in H A	—	767
EDH-SQD-00852	HC-4180-B	41 x 8 in W x D x 80 in H A	—	768
EDH-SQD-00854	HC-4144-DB	41 x 9-1/4 in W x D x 44 in H A	—	766
EDH-SQD-00856	HC-4153-DB	41 x 9-1/4 in W x D x 53 in H A	—	767
EDH-SQD-00858	HC-4162-DB	41 x 9-1/4 in W x D x 62 in H A	—	768
EDH-SQD-00860	HC-4180-DB	41 x 9-1/4 in W x D x 80 in H A	—	768
EDH-SQD-00862	QM-3132-B	31 in W x 10-5/8 in D x 32 in H A	—	985
EDH-SQD-00864	QM-3144-B	31 in W x 10-5/8 in D x 44 in H A	—	985

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00866	QM-3156-B	31 in W x 10-5/8 in D x 56 in H A	—	985
EDH-SQD-00868	QM-3168-B	31 in W x 10-5/8 in D x 68 in H A	—	986
EDH-SQD-00870	QM-3180-B	31 in W x 10-5/8 in D x 80 in H A	—	986
EDH-SQD-00872	QM-3192-B	31 in W x 10-5/8 in D x 92 in H A	—	986
EDH-SQD-00874	QM3875B	38 in W x 75 in H A	—	935
EDH-SQD-00875	QM3890B	38 in W x 90 in H A	—	935
EDH-SQD-00919	NQ430L1C14	32 in H x 14 in W x 5-3/4 in D (Steiner) C	—	845
EDH-SQD-00921	NQ442L2C14	14 in W x 5-3/4 in D x 38 in H (Standard Electric; Steiner width field 13.49 in) C	—	846
EDH-ZIN-00022	QFP2T	Listing package dims 4.25 x 4.5 x 1.125 in, 0.1 lb (may be item size) C	—	1877

Appendix A Documentation Library

OEM and supporting documents, grouped by manufacturer lineage and document type. 'Local' identifies documents preserved in docs/library/ (see docs/DOCUMENT_INDEX.csv for checksums). Documents not preserved are cited by URL; inaccessible documents are listed as research leads.

Eaton lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S252	KPRL3AED3 spec sheet	Eaton product specifications - KPRL3AED3 (Elliott Electric hosted Eaton spec sheet) 2024	distributor	Local	1
S632		RACH24L125I CH Retrofit Kit Int Only 1 PH 125A Main Lug Only (product data sheet)	distributor	Local	1
S6	CA08100003E	Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control 2020-06	catalog	Local	0
S465	CA08100004E	SPD, Power Conditioning, PF Capacitors and Harmonic Filters - Volume 3 Power Distribution and Control Assemblies, Tab 2 (CA08100004E), October 2022 2022-10	catalog	Local	1
S186	CA08100005E	Volume 4 - Circuit Protection, Tab 2 Molded Case Circuit Breakers (excerpt pages V4-T2-188, 190, 203, 334, 345, 354, 356), October 2015 2015-10	catalog	Local	37
S187	CA08100005E	Volume 4 - Circuit Protection, Series G EG-Frame pages V4-T2-16..V4-T2-27, April 2014 2014-04	catalog	Local	19
S195	CA08100005E	Volume 4 - Circuit Protection, Tab 2 Molded Case Circuit Breakers (current) 2026-04	catalog	blocked	0
S647	CA08100005E (September 2017)	Volume 4 - Circuit Protection, Tab 1.1 Miniature Circuit Breakers and Supplementary Protectors (QUICKLAG accessories) 2017-09	catalog	Local	13
S440	CA08100014E	Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp. V12-T4-1 to V12-T4-22) 2016-10	catalog	ok	2
S184	CA08101001E	Molded Case Circuit Breakers (Tab 12) - Consulting Application Guide / catalog, November 2008 2008-11	catalog	Local	310
S185	CA08101001E	Series C Molded Case Circuit Breakers 70-250 Amperes J-Frame (pp.12-87..12-92), May 2008 2008-05	catalog	Local	2
S188	CA08101001E (excerpt)	Series C Molded Case Circuit Breakers 70-400 Amperes K-Frame p.12-98 (May 2008) - Types KD, HKD, KDC electronic 2008-05	catalog	Local	3
S7	CA08104001E (Tab 22)	Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/2a-LX/1R/2R) 2018-01	catalog	Local	22
S18	CA08104001E Tab 21 (TB01500003E)	Switchboards—Low Voltage (Consulting Application Guide Tab 21) 2018-04	catalog	Local	18
S249	DG014001EN	Design Guide DG014001EN Pow-R-Line 1X, 2X and 3X panelboards (Effective November 2024) 2024-11	catalog	Local	6
S250	DG014003EN	Design Guide DG014003EN Pow-R-Line 4X panelboards (Effective March 2025) 2025-03	catalog	Local	6
S443	PL01400003E	Vintage Cutler-Hammer Panelboards and Switchboards Price List PL01400003E 2008-01	catalog	blocked	0
S230		Eaton Electrical Launches New Options for Upgrading Existing Panelboards - Retrofit Kits (Type CH and BR) selection guide	catalog	Local	60
S618		Product specifications - Eaton CL245 (Eaton Classified 3/4in thermal magnetic circuit breaker, Type CL 1-Inch classified replacement breaker)	catalog	Local	0
S637		Eaton Retrofit Interior Kit (video) and retrofit interior kit brochure (USESI 295119)	catalog	ok	6

Ref	Doc no.	Title / date	Type	Avail.	Entries
S248	E3A1071 RevG	Pow-R-Line 3FQS Fusible Panelboard Instruction Leaflet E3A1071 RevG (December 2010) 2010-12	instruction	Local	95
S22	IB015002EN	Eaton Pow-R-Line CS switchboards instruction manual 2021-11	instruction	ok	0
S253	IL014069EN	Instruction Leaflet IL014069EN Pow-R-Line 1X/2X/3X Installation reference for tall interiors (Effective February 2024) 2024-02	instruction	Local	0
S246	IL01417001E	Instruction Manual Pow-R-Line Retrofit Panelboards, P1R & P2R Retrofit Panels (IL01417001E, Effective November 2007) 2007-11	instruction	Local	0
S23	IM01500001E	Pow-R-Line switchboards instruction manual 2021-05	instruction	Local	0
S245	MN015002EN	Pow-R-Line XD switchboards Instruction Manual MN015002EN (Effective July 2019) 2019-07	instruction	Local	0
S247	PUB50895	Instruction Manual PUB50895 Pow-R-Line Retrofit Panelboards P1R 240Vac Max & P2R 347/600Vac Max (Effective May 2016, Rev.004) 2016-05	instruction	Local	0
S13	CA08100014E	Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions 2018-06	renewal_parts	Local	14
S21	CA08100014E Tab 5	Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt 2016-10	renewal_parts	Local	13
S2	RP01400001E	Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F, PRL5P, PRL1a/2a-LX, Pow-R-Command) 2009-02	renewal_parts	Local	282
S3	RP01400001E	Renewal Parts RP01400001E - Current Eaton panelboards 2017-10	renewal_parts	Local	342
S17	RP01400001E	Renewal Parts RP01400001E — Pow-R-Line Xpert and legacy panelboards 2022-05	renewal_parts	Local	39
S16	RP01400001E (2017)	Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, PRL5P) 2017-10	renewal_parts	Local	231
S1	RP01400001E (Z25020)	Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a, PRL2a, PRL3a, PRL4) 2021-04	renewal_parts	Local	361
S14	RP01400002E	Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CDP/HCDP, FDP) 2013-02	renewal_parts	Local	75
S15	RP01400002E (2009)	Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition) 2009-04	renewal_parts	Local	32
S5	RP01400002E (Z13209)	Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, PRL3-LX, CDP/HCDP, FDP) 2013-02	renewal_parts	Local	57
S442	RP01400003E	Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40, MP-200, PB, PH, PH-L, EP, EE) 2013-02	renewal_parts	Local	113
S4	RP01414001E	Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E 2011-01	renewal_parts	Local	92
S189	3TA150FB spec sheet	Eaton product specifications 3TA150FB unknown	web	Local	1
S190	ID-SPE-v2-3TA632LK	Eaton Series G molded case circuit breaker accessories and terminals - 3TA632LK (pe.eaton.com spec) unknown	web	Local	1
S19	KPRL4KDS spec sheet	Eaton product specifications — KPRL4KDS	web	Local	1
S20	KPRL4KDT spec sheet	Eaton product specifications — KPRL4KDT	web	Local	1
S251		Eaton online product catalog SKU pages (https://www.eaton.com/us/en-us/skuPage.<catalog number>.html): General/Product specifications tables 2026-10	web	ok	343

Ref	Doc no.	Title / date	Type	Avail.	Entries
S441		Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page 2010-06	web	ok	35

Square D / Schneider Electric

Ref	Doc no.	Title / date	Type	Avail.	Entries
S127	0600DB1004	Square D I-Line Plug-on Connection Design and Advantages, Data Bulletin 2010-12-01	bulletin	blocked	0
S590	1640BR1701	Fingersafe IP2X per IEC 60529 Barriers for NQ Panelboards (Data Bulletin)	bulletin	Local	12
S608	998-21173700_GMA-US (printed 998-21176626)	Surgelogic SurgeLoc surge protective devices (brochure) 2021-04	bulletin	Local	12
S642	Class 0515 bulletin	480Y/277 Vac EDB, EGB and EJB Lighting Panelboard Circuit Breakers (Class 0515 data bulletin)	bulletin	ok	1
S32		Square D NQ and NF Lighting Panelboards brochure unknown	bulletin	Local	0
S27	0100CT2401-SEC-09	Panelboards: Digest Section 9 (Square D Digest, Section 9 Panelboards) 2026-07-16	catalog	Local	353
S180	0611CT1001 R01/13	PowerPact H-, J-, and L-Frame Circuit Breakers Catalog 2013-01	catalog	Local	78
S29	1640CT0801	NQ Circuit Breaker Panelboards Catalog, Class 1640 2021-08	catalog	Local	3
S30	2110CT9701	I-Line Circuit Breaker Panelboards Class 2110 Catalog 2025-02-18	catalog	Local	4
S95	2110CT9701R07/19	I-Line Circuit Breaker Panelboards Catalog, Class 2110 2019-07	catalog	Local	12
S94	2700CT1101	Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switchboards Catalog (Class 2710, 2741, 2742) 2012-02	catalog	Local	43
S125	2700CT1601	OEM QED-2 Switchboard I-Line Interiors, Single-Row and Double-Row OEM Interior Products Catalog 2023-01-11 (v1.3)	catalog	blocked	5
S96	4620CT9601R07/15	QMB Fusible Panelboards Catalog, Class 4620 2015-07	catalog	Local	93
S643	Catalog 1640CT0801 R10/19	NQ Circuit Breaker Panelboards, Class 1640 2019-10	catalog	Local	3
S644	Class 1630 catalog, 01/2005	NQOD Circuit Breaker Panelboards, Class 1630 (Application Data) 2005-01	catalog	Local	5
S28	Digest 0100CT2401 (online)	Schneider Electric Digest Plus - Section 9: Panelboards (online HTML pages: NQ Panelboard Accessories, NQ Merchandised Main Circuit Breaker Interiors, NF Panelboard Accessories, I-Line Merchandised Panelboard Accessories, etc.) 2026	catalog	ok	0
S463	Digest 152	Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution Panelboards section pp.55-86 (index p.55, NQO/NQOB pp.56-65, NA1B pp.66-67, NH1B p.68, I-Line pp.72-75, NTFB/NTHB p.76, QMB pp.78-83, accessories p.84, ordering/replacement p.85) 1970	catalog	ok	132
S182	Digest 176 Section 3 (Class 612)	Square D Digest Section 3 - Molded Case Circuit Breakers and Enclosures (2012) 2012	catalog	Local	65
S639	Digest Section 1 (2012)	Square D Digest 2012, Section 1: Load Centers (with list prices) 2012	catalog	ok	25
S638	Digest Section 1 (dated 1/11/2024), Class 1130, ref. catalog 1100CT0501	Square D Digest, Section 1: Load Centers / QO Miniature Circuit Breakers (QO Accessories, Table 1.16) 2024-01-11	catalog	Local	17
S609	Digest Section 13 (2009); distributor file name Square_D_QM 3890B_Catalog.pdf	Square D Digest (2009) Section 13 - Obsolescent Panelboards (QMB RTI, QMB replacement units, NEHB replacement parts, NQOD merchandised) 2009	catalog	Local	139

Ref	Doc no.	Title / date	Type	Avail.	Entries
S183	Digest Section 3 (Class 612, ref. catalog 0612CT0101)	Square D Digest Section 3 - Molded Case Circuit Breakers and Enclosures (2016) 2016-09-24	catalog	Local	60
S434	CF16KF63C117UMS-03	Square D CF16KF63C STEP model page "1600A 63H DR I-LINE CENTER FEED COPPER BUS OEM QED2 INTERIOR" 2017-03-10	drawing	ok	1
S432	48040-651-03	SL400, SL800, SL800FT and SL1200 Sub-feed Lugs Instruction Bulletin 2006-05	instruction	Local	4
S431	48040-651-03 Rev. 01	SL400 Sub-feed Lugs Installation Instruction Bulletin 2025-09	instruction	Local	2
S430	48049-250-01	S33930 Sub-feed Lugs Instruction Bulletin 2001-05	instruction	Local	4
S194	48940-221-02 (v05, 2019-12)	Mechanical Lug Kits Installation Instructions (AL150HD, AL150HDS, CU150HD, AL175JD, AL250JD, CU250JD) 2019-12	instruction	blocked	5
S84	80030-695-02	I-Line (HCJ, HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation, Class 2110, Rev. 01 2019-02	instruction	Local	6
S97	80030-695-02	I-Line (HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation, Instruction Bulletin, Class 2110 2011-09	instruction	Local	8
S429	80043-055-13	Power-Style QED-2 Switchboards Instruction Bulletin (English section, (c)1988-2018) 2018-03	instruction	ok	3
S126	80043-055-16	Power-Style QED-2 Switchboards Instruction Bulletin 2024-06	instruction	blocked	0
S603	80043-252-04	Type MH WP NEMA 4 / 4X Enclosures for NF or NQ Lighting Panelboards, Rev. 02 2024-08	instruction	Local	0
S31	80043-309-20 Rev. 10	I-Line Circuit Breaker Power Distribution Panelboards Information Manual, Class 2110 2026-07	instruction	Local	3
S82	80043-312-03	I-Line Panelboard Grounding Bar Mounting Instructions 2006-11	instruction	Local	1
S83	80043-339-04	QMBHW and QMBJW Circuit Breaker Adapter Units Installation, Class 4620 2005-05	instruction	Local	4
S607	80043-350-04	Box Extension Kit Installation (Class 1600) 2003-12	instruction	Local	5
S606	80043-449-03	I-Line 4-Piece Trim and Door Kits (HCN/HCM/HCP/HCR/HCW/HCWM) 2003-09	instruction	Local	11
S600	80043-455-04	MH Weatherproof Enclosure Installation (Classes 1630 NQOD, 1640 NQ, 1660 NEHB, 1670 NF) 2007-10	instruction	Local	4
S605	80043-616-03	I-LINE 4-Piece Trim and Door Kits (HCP, HCR, HCW, HCWM, 42 in) 2001-07	instruction	Local	11
S604	80043-660-04	I-Line HCP Trim Kit (Class 2110, Type HCP) 2006-05	instruction	Local	10
S34	80043-699-03	NQOD Panelboard Main Circuit Breaker (250 A Maximum) and Adapter Kit Installation, Class 1630 2006-03	instruction	Local	2
S596	80043-706-02	Current Transformer Neutral Bonding Installation in I-Line Panelboards, Class 2110 2013-03	instruction	Local	4
S35	80043-722-02	Q-Frame Main Circuit Breaker (225 A Maximum) and Adapter Kit Installation onto an NQ Panelboard, Class 1640 2009-03	instruction	Local	2
S36	80043-724-01	NQ Panelboard Mechanical Main Lug Kit (100, 225, 400, and 600 Amp) 2008-01	instruction	Local	5
S37	80043-725-02	H- or J-Frame Main Circuit Breaker and Adapter Kit (NQ), Rev. 01 2015-09	instruction	Local	4
S38	80043-726-01	KI-Frame Main Circuit Breaker (225 A Maximum) and Adapter Kit Installation onto an NQ Panelboard 2008-01	instruction	Local	1

Ref	Doc no.	Title / date	Type	Avail.	Entries
S39	80043-727-02	LA/LH Main Circuit Breaker and Adapter Kit Installation onto an NQ Panelboard, Class 1640 2010-05	instruction	Local	1
S40	80043-728-01	225 A Feed-Through Lug Kit Installation onto an NQ Panelboard 2008-01	instruction	Local	2
S41	80043-729-01	100 and 225 A Sub-Feed Lug Kit Installation onto an NQ Panelboard 2008-01	instruction	Local	2
S42	80043-730-01	Sub-Feed Circuit Breaker and Adapter Kit Installation onto an NQ Panelboard unknown (08/2018 addendum attached)	instruction	Local	2
S43	80043-731-02	Dual Sub-Feed Circuit Breaker and Adapter Kit Installation onto NQ Panelboard, Rev. 02 2024-07	instruction	Local	2
S44	80043-732-02	NQ Panelboard 3-, 6-, 12-, 18-, and 24-inch Trim and Rail Extension Kit 2012-01	instruction	Local	5
S45	80043-733-01	NQ Panelboard Crimp Main Lug Kit (100, 225, 400, and 600 Amp), Class 1640 2008-01	instruction	Local	8
S46	80043-734-01	Neutral Kit Installation onto an NQ Panelboard 2008-01	instruction	Local	7
S47	80043-735-01	NQ Branch Connector Replacement Kit, Installation onto an NQ Panelboard, Class 1640 2008-02	instruction	Local	1
S48	80043-741-03	NF/NFOM Panelboards Class 1670 Instruction Bulletin, Rev. 06 2023-02	instruction	Local	13
S49	80043-745-01	400 A Sub-Feed Lug Kit Installation onto an NQ Panelboard 2008-01	instruction	Local	1
S50	80043-746-01	400 A Feed-Through Lug Kit Installation onto an NQ Panelboard 2008-01	instruction	Local	2
S51	80043-753-01	NQ and NF Equipment Space Kit 2008-03	instruction	Local	2
S52	80043-754-02	NF Panelboard Neutral Kit Installation onto an NF Panelboard 2009-01	instruction	Local	6
S53	80043-755-01	NF Panelboard 125 A and 250 A Sub-Feed Lug Kit 2008-04	instruction	Local	2
S54	80043-756-01	NF Panelboard 400 A Sub-Feed Lug Kit 2008-04	instruction	Local	1
S55	80043-757-02	NF Panelboard 125 A and 250 A Feed-Through Lug Kit Installation onto an NF Panelboard 2009-01	instruction	Local	2
S56	80043-758-02	NF Panelboard 400 A Feed-Through Lug Kit Installation onto an NF Panelboard 2009-01	instruction	Local	1
S57	80043-760-03	NF Panelboard Dual Sub-Feed Circuit Breaker Adapter Kit Installation onto an NF Panelboard, Rev. 02 2024-07	instruction	Local	2
S58	80043-761-01	NF Panelboard Mechanical Main Lug Kit (125, 250, 400, and 600 Amp) 2008-05	instruction	Local	4
S59	80043-762-01	NF Panelboard Crimp Main Lug Kit (125, 250, 400, and 600 A) 2008-06	instruction	Local	8
S60	80043-763-01	NF Panelboard Trim and Rail Extension Kit (6-, 12-, and 18-inch) 2008-06	instruction	Local	3
S61	80043-764-03	NF Panelboard H- or J-Frame Main Circuit Breaker Adapter Kit Installation onto an NF Panelboard, Rev. 01 2015-09	instruction	Local	4
S62	80043-765-02	NF Panelboard FI- or KI-Frame Main Circuit Breaker and Adapter Kit Installation onto an NF Panelboard 2009-01	instruction	Local	2
S63	80043-766-03	NF Panelboard L-Frame Main Circuit Breaker Adapter Kit Installation onto an NF Panelboard 2009-08	instruction	Local	1
S64	80043-767-01	NF Panelboards Branch Connector Kit Installation onto an NF Panelboard 2008-08	instruction	Local	2

Ref	Doc no.	Title / date	Type	Avail.	Entries
S65	80043-768-01	NF Panelboards Gutter-Mounted Neutral Bonding Strap Installation onto an NF Panelboard 2008-08	instruction	Local	0
S66	80043-770-01	NF Column-Width Panelboards Branch Connector Kit Installation onto an NF Panelboard 2008-09	instruction	Local	0
S601	80043-771-01	MH Weatherproof Enclosure - Installation with an NQ or NF Panelboard 2009-03	instruction	Local	11
S598	80043-772-01	Quarter-turn Fasteners Kit Installation onto an NQ, NF, or I-Line Panelboard Enclosure (Classes 1640, 1670, 2110) 2009-04	instruction	Local	1
S599	80043-773-01	Endwall and Closing Plate Kit Installation onto an NQ or NF Panelboard Enclosure (Classes 1640, 1670) 2009-04	instruction	Local	2
S67	80043-774-01	Backfed Main Circuit Breaker Barrier Kit Installation onto an NQ or NF Panelboard, Classes 1640 and 1670 2009-04	instruction	Local	2
S68	80043-778-01	Condo Riser Neutral Assembly Kit Installation onto an NQ Condo Riser Panelboard, Class 1640 2009-01	instruction	Local	1
S69	80043-786-01	Neutral Bonding Screw Kit Installation onto an NQ 14 Inch Panelboard 2010-01	instruction	Local	0
S597	80043-789-01	I-Line Panelboards - Current Transformer Neutral Bonding Installation, Rev. 02 2013-03	instruction	Local	1
S70	80043-792-01	Liebert 400 A Sub-Feed Lug Kit Installation onto a Liebert NQ Panelboard 2012-03	instruction	Local	1
S71	80043-809-01	QOB Circuit Breaker Installation when Equipped with Jaw Accessory Kit QO1PJ15, Class 7267 (NQ Panelboards) 2013-11	instruction	Local	1
S591	80043-817-01	Replacement Part QOFSBF for Fingersafe Covers IP2X per IEC 60529 2015-11	instruction	Local	1
S592	80043-818-01	Replacement parts QOFSLALB and QOFSHALB for Fingersafe Covers IP2X per IEC 60529 2015-11	instruction	Local	2
S593	80043-820-01	Replacement parts NQHJQLLC and NQLALLC for Fingersafe Covers IP2X per IEC 60529 2015-11	instruction	Local	2
S594	80043-822-01	Replacement parts NQHJLSC, NQQLSC, NQLALHLSC and NQMLLSC for Fingersafe Covers IP2X per IEC 60529 2015-11	instruction	Local	4
S595	80043-826-01	Replacement part NQNCC for Fingersafe Covers IP2X per IEC 60529 2015-11	instruction	Local	1
S72	80043-839-01	Installation and Replacement of Fingersafe IP2X per IEC 60529 Main Circuit Breaker Covers and U.S. Service Entrance Devices, Rev. 04 2023-04	instruction	Local	27
S73	80043-844-01	I-Line Panelboards - Barrier Kits Installation Instructions, Rev. 03 2026-06	instruction	Local	4
S74	80043-845-01	I-Line Panelboards - Expanded Neutral Assembly Installation 2020-05	instruction	Local	40
S75	80043-847-01	Main Circuit Breaker 400/600 A and Sub-Feed Circuit Breaker 400 A Kit for PowerPacT L-Frame, Installation onto an NQ Panelboard (NQMB6PPL) 2021-11	instruction	Local	1
S76	80043-848-01	Main Circuit Breaker and Sub-Feed Circuit Breaker Deadfront Replacement Kit for PowerPacT L-Frame (NQRPLMB6PPL, NFRPLMB6PPL, NQRPLMB63RPPL, NFRPLMB63RPPL) 2020-10	instruction	Local	2
S602	80043-850-01	MH Vented NEMA 3R Weatherproof Enclosure, Class 1640 and 1670 2020-08	instruction	Local	6
S77	80043-853-01	NQ/NF U.S. Condo Riser Panelboards Neutral Bonding Strap Installation (NFNQCRBOND46, NFCRBOND8) 2020-08	instruction	Local	3
S78	80043-858-01	NQ200AN Neutral Terminal Kit 2020-08	instruction	Local	1

Ref	Doc no.	Title / date	Type	Avail.	Entries
S79	80043-861-01	Main Circuit Breaker Deadfront Replacement Kit for PowerPacT M-Frame and P-Frame (NFRPLMB8PPMP) 2021-07	instruction	Local	1
S80	80043-866-01	Main Circuit Breaker 400/600 A or Sub-Feed Circuit Breaker 400 A Kit for PowerPacT L-Frame, Installation onto an NF Panelboard (N600MPPL), Class 1670 2021-10	instruction	Local	1
S81	80043-868-01	Sub-Feed Circuit Breaker 600 A Kit for PowerPacT L-Frame, Installation onto an NF Panelboard (NF600SFBPPL), Class 1670 2021-10	instruction	Local	1
S640	Instruction Bulletin 48840-159-01 Rev. 01	QO1PA Series 1, QOU1PA and HOM1PA Series 1 Handle Padlock Attachment 2010-04	instruction	Local	1
S641	Instruction Bulletin 48940-241-01 Rev. 01	Fixed Padlock Attachment Kits S29371 and S37422 for PowerPact H- and J-Frame Circuit Breakers 2010-03	instruction	Local	2
S131	FA92286	FAQ FA92286: repair parts for a QMB367W, Series E1 (E01)	renewal_parts	ok	10
S130	FA92305	FAQ FA92305: repair parts for a QMB363TW, Series E1 (E01)	renewal_parts	ok	9
S181	AL175JD data sheet	Product data sheet AL175JD - Circuit breaker accessory, PowerPacT J, lug kit, mechanical, 150A to 175A, aluminum, qty 3 unknown	web	Local	1
S100	FA100365	FAQ FA100365: blank filler catalog numbers for current design QMB panelboards	web	ok	4
S135	FA100372	FAQ FA100372: replacement for a QMB3260 600 A QMB switch	web	ok	5
S85	FA102748	Schneider Electric FAQ FA102748: What is the SKNQOD225 and where is it used? unknown	web	ok	1
S107	FA103561	FAQ FA103561: mounting bracket screw for an FA or FH I-Line breaker	web	ok	1
S611	FA104089	Schneider Electric FAQ FA104089: What is the replacement for a NQODQ2 Main Circuit Breaker Adapter Kit? 2003-07-11 (modified 2026-08-17)	web	ok	2
S104	FA108059	FAQ FA108059: Do the blank filler plates and extensions for I-Line panelboards fit the QED switchboards?	web	ok	8
S112	FA108122	FAQ FA108122: QED cover screw part number	web	blocked	1
S102	FA112712	FAQ FA112712: What blank fillers are required in an I-Line panel when an LI breaker is replaced with a KI?	web	ok	3
S140	FA113960	FAQ FA113960: replacement branch switch for the old QMB210T Series 1 through 4	web	ok	3
S111	FA116225	FAQ FA116225: plug-button for unused holes in NEMA 1 and 3R QED-1 and QED-2 switchboards (incl. Speed-D)	web	ok	1
S622	FA116402	Schneider Electric FAQ FA116402 - Panel interiors for existing back boxes (retrofit form to local sales office)	web	blocked	0
S105	FA117096	FAQ FA117096: difference between plug-on and bolt-on I-Line connections	web	ok	0
S141	FA118445	FAQ FA118445: part number for a 300 A / 3P circuit breaker unit for an old QMB Saflex panelboard	web	ok	2
S110	FA118475	FAQ FA118475: deadfront brackets on an I-Line HCN3254-2 panelboard	web	ok	2
S132	FA119872	FAQ FA119872: replacement for a QMB310T, series 1 through 4 switch	web	ok	4
S90	FA121228	Schneider Electric FAQ FA121228: What is the part number for the branch fingers or connector kits for a 125 amp and 250 amp NF panelboard interiors? 2007-04-10 (modified 2026-06-15)	web	ok	1
S116	FA121592	FAQ FA121592: Are Square D QED switchboards able to have additional (splice-to) sections installed?	web	ok	0
S139	FA122202	FAQ FA122202: QMB blanks for current style QMB panelboards and switchboards with QMB distribution	web	ok	4
S137	FA122651	FAQ FA122651: replacement switch for the old QMB2240, 2P 400 A QMB switch	web	ok	5
S129	FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified)	QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T -> QMB321T + QMB306LEX; QMB306T Series 1 -> QMB322TD + QMB306LEX)	web	blocked	5

Ref	Doc no.	Title / date	Type	Avail.	Entries
S88	FA123424	Schneider Electric FAQ FA123424: Will the main breaker adapter kits for NQ panelboards work with NQOD panelboards? 2008-04-07 (modified 2022-12-05)	web	ok	1
S86	FA124209	Schneider Electric FAQ FA124209: What is the parts breakdown on an SKNQOD225? 2008-06-06 (modified 2026-04-22)	web	ok	1
S114	FA124494	FAQ FA124494: door and frame hinges for a QED2, CMM, or Speed-D NEMA 3R switchboard	web	ok	7
S621	FA124771	Schneider Electric FAQ FA124771 - Existing box studs are not used in Square D Retrofit offering	web	blocked	0
S113	FA125924	FAQ FA125924: replacement handle for an outdoor QED switchboard	web	ok	1
S109	FA125949	FAQ FA125949: Can you replace the mounting bracket on the load end of I-Line breakers?	web	ok	0
S133	FA127541	FAQ FA127541: replacement for a QMB3620	web	ok	3
S89	FA128003	Schneider Electric FAQ FA128003: What is the replacement for NQOD30L400CU? 2009-07-14 (modified 2026-04-17)	web	ok	1
S136	FA128647	FAQ FA128647: replacement parts for a QMB3240	web	ok	5
S636	FA129258	Schneider Electric FAQ FA129258 - Bus bars in obsolete NEHB panelboard are not field replaceable items	web	blocked	1
S106	FA129562	FAQ FA129562: mounting screw for a PowerPact H or J frame breaker I-Line mounting bracket	web	ok	1
S91	FA166748	Schneider Electric FAQ FA166748 (NEHB obsolescence / NF replacement) unknown	web	blocked	0
S193	FA221892	Can the AL400L61K3 lug be installed on the 400 amp or 600 amp Powerpact L frame breaker? (FAQ FA221892) unknown	web	blocked	1
S99	FA225625	FAQ FA225625: Do the merchandised Speed-D switchboards with QMB branch devices come with blank fillers for the unused space?	web	ok	4
S613	FA228483	Schneider Electric FAQ FA228483: Can a main breaker be changed out or added to a NQOD panel? 2014-09-18 (modified 2021-09-29)	web	ok	2
S620	FA239605	Schneider Electric FAQ FA239605 - Retrofit form / custom trim for existing Schneider Electric or competitor enclosure with current-style NF or NQ interior	web	blocked	5
S138	FA242815	FAQ FA242815: Does Schneider offer a 1200 A QMB switch? Where is it used?	web	ok	1
S101	FA243887	FAQ FA243887: What is the difference between an I-Line Blank Filler and a Blank Extension?	web	ok	9
S623	FA283569	Schneider Electric FAQ FA283569 - Square D does not offer QO or Homeline load center retrofit interiors	web	blocked	0
S610	FA299520	Schneider Electric FAQ FA299520: Can you replace a Q2L main breaker, on a NQOD panel, with the QBL, QDL, or QGL breaker? 2016-10-18 (modified 2026-08-19)	web	ok	4
S117	FA308905	FAQ FA308905: Do QED 2 switchboards NEMA 1 or 3R come with a solid bottom?	web	ok	0
S87	FA332061	Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO / NQOB / NQOD / NEHB / NF panelboards 2017-11-17 (modified 2023-03-07)	web	ok	0
S624	FA339443	Schneider Electric FAQ FA339443 - Installing Square D equipment in other manufacturers' gear (UL listing / warranty may be voided)	web	blocked	0
S134	FA88047	FAQ FA88047: replacement for a QMB3606T	web	ok	4
S103	FA93287	FAQ FA93287: blank extensions for the wide side of an HCW panelboard	web	ok	2
S115	FA96877	FAQ FA96877: deadfront screws used on Square D panelboards (NF, I-Line, NQ, QMB)	web	ok	1
S612	FAQ000265182	Schneider Electric FAQ FAQ000265182: What type of breaker does the NQODQB Main Breaker Kit accept? 2026-01-08	web	ok	1
S118	FAQ000269509	FAQ FAQ000269509: I-Line subfeed lug kits to tap I-Line bus (SL100...SL1200P7)	web	blocked	9
S108	FAQ000274446	FAQ FAQ000274446: replacement mounting screw for L-frame breaker inside I-Line panelboard	web	ok	0

Ref	Doc no.	Title / date	Type	Avail.	Entries
S119	FAQ000279508 / FAQ000257217	Square D QMB / QED-2 FAQ group (QED-2 Series 2 QMB mounting height 63 in.; QED-2 I-Line section limits 3000 A single row / 2000 A double row)	web	blocked	1
S33	NQMB2HJ datasheet	Product data sheet NQMB2HJ - NQ Panelboard Acc. Main Breaker Kit 225A, H/J Frame 2018-02	web	Local	1
S98	QMB15BLW data sheet	Product data sheet QMB15BLW - Panelboard blank filler plate 2023-04-12	web	Local	1
S217		Schneider Electric FAQ: replacement breakers for Federal Pacific switchboards/panelboards; NBLP panelboards take NB type breakers	web	blocked	0
S218		Federal Pioneer / Schneider Canada FAQ FA234570	web	blocked	0
S433		Product data sheet SL400 - Panelboard accessory, I-Line, lug kit, subfeed, 400A, 6 in 2026-06	web	Local	1
S456		Schneider Electric FAQ FA130530 - MLN panelboards and replacement circuit breakers (MLN panelboards and switchboards sold in the USA 1962-1968)	web	ok	4
S457		Schneider Electric FAQ FA233845 - Are NY1B panelboard replacement breakers still available?	web	ok	0
S458		Schneider Electric FAQ FA96717 - What is the QSFB switch/fuse unit and is it available? (NQOB panelboards)	web	ok	1
S459		Schneider Electric FAQ group on NQO/NQOB, NEHB, NA1B, NY1B (FA97632, FA124608, FA232958, FA87904, FA100575, FA332061, FAQ000266417, FA129512, FA119163, FA122757, FA166748, FA121261, FA125651, FA128561) - content known only from search-engine result summaries	web	blocked	4
S645		Schneider Electric product page / FAQ search snippets for S29370 and S29371 (se.com, blocked from container; seen via web search results)	web	blocked	3

GE / ABB lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S662	1SXU900299G0201	Product Life Cycle Announcement - Spectra Switchboards 2021-04-01	bulletin	Local	0
S664	1SQC088005C0201 Rev C	ReliaGear SB Switchboard EXcelerate Catalog / Design Guide	catalog	Local	0
S158	1SXU900191B0201	ReliaGear neXT Power Panelboards (brochure) 2022-01	catalog	ok	0
S143	BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014)	BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; Renewal Parts) 2014-07	catalog	Local	283
S201	BuyLog Section 3, Rev. 1/08	GE 2008 BuyLog, Section 3: Molded Case Circuit Breakers (excerpt, 3 pp.) 2008-01	catalog	Local	2
S200	BuyLog Section 3, Rev. 9/12	GE BuyLog Catalog, Section 3: Molded Case Circuit Breakers (with GO-135 list prices) 2012-09	catalog	Local	220
S198	BuyLog Section 6, Rev. 1/19	GE Products BuyLog, Section 6: Molded Case Circuit Breakers 2019-01	catalog	Local	289
S199	BuyLog Section 6, Rev. 11/13	GE BuyLog Catalog, Section 6: Molded Case Circuit Breakers 2013-11	catalog	Local	0
S650	BuyLog Section 9, Rev. 1/08	BuyLog Catalog Section 9: Panelboards (A-Series, Spectra Series, SCP Plus, CCB/QMR renewal parts) with list prices 2008-01	catalog	Local	253
S202	BuyLog p. 6-103 Rev. 7/13	GE BuyLog Section 6 single page 6-103 (lugs), Rev. 7/13 2013-07	catalog	Local	4
S144	BuyLog p.11-10 Rev. 11/13	GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Parts 2013-11	catalog	Local	6
S649	DEA-623	Spectra Series Plug-in Switchboards - Pro-Stock Program 2015-11	catalog	Local	36
S661	GET-8032C (ABB ID 9AKK108467A9254)	Spectra Series Switchboards (catalog/application guide) [GE legacy document] 2013-02	catalog	Local	0

Ref	Doc no.	Title / date	Type	Avail.	Entries
S161		BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (obsoleted)' bolt-on mounting hardware)	catalog	blocked	0
S427		ABB Quick Selector Guide - Small Projects (distributor edition, Viking Electric) - incl. Tmax XT Retrofit Kits for Spectra Panelboards, ReliaGear neXT renewal parts, Spectra renewal parts	catalog	Local	26
S428		ReliaGear neXT power panelboards - typical layouts / X-space brochure	catalog	Local	3
S362	11-A-1078-01 Rev. 02	Trim & Hinge Installation Instructions (P4 / P5)	instruction	Local	0
S386	12-A-1082-01 Rev. 0	P2 Panelboard Kit DFK1 For Dead Front Coverage of 1in Pole Breaker Modules	instruction	Local	1
S387	12-A-1083-01 Rev. 0	P2 & P3 Panelboard Kit DFFP3 For Dead Front Coverage of a 3 in Unallocated Branch Space	instruction	Local	1
S388	12-A-1084-01 Rev. 0	P2 & P3 Panelboard Kit DFFP6 For Dead Front Coverage of a 6 in Unallocated Branch Space	instruction	Local	1
S674	1SQC900009M0201	ReliaGear neXT - Dual Main Lugs	instruction	Local	0
S671	1SQC900015M0201	ReliaGear neXT Panelboard - Replacement Part Instructions 2025	instruction	Local	2
S675	1SQC900024M0201	ReliaGear neXT - IP20 Main Lug Barrier Installation Instructions	instruction	Local	0
S672	1SQC900028M0201	ReliaGear neXT - Breaker Installation & Removal Instruction Sheet	instruction	Local	0
S673	1SQC900029M0201	ReliaGear neXT - Retrofit Bracket Kit (RGRPIFRK) Instruction Sheet 2025	instruction	Local	1
S670	1TQC173000E0023 / GEH5037	Insulated Equipment Ground Kit Cat. No. EGS12/EGC12 for ReliaGear Lighting Panelboard Type RQ, RL and RE 2024-04	instruction	Local	2
S669	1TQC173000E0032 / GEH6518	ASPSERENT - ReliaGear Lighting Panelboard Service Entrance Field Conversion Kit 2025-01	instruction	Local	1
S665	1TQC173000E0048	ReliaGear lighting panelboards - Mounting hardware kit for FB and XT2 circuit breakers 2022-02	instruction	Local	2
S667	1TQC173000Z0022 / DEH41056	ReliaGear Lighting Panelboards - Interior Mounting Kits 2020-03	instruction	Local	1
S668	1TQC173000Z0023	ReliaGear lighting panelboards - Lock Kits 2024-12	instruction	Local	2
S666	1TQC173000Z0024	ReliaGear lighting panelboards - Mounting hardware kit for A2, XT1 and XT4 circuit breakers	instruction	Local	3
S663	1VAL088301-MB Rev B	ReliaGear SB Low Voltage Switchboards - Installation, Operations and Maintenance Manual	instruction	Local	2
S406	DEH042 R03	Spectra Series Power Panelboards - Circuit Breaker Cover (SE, SF, TE, TF, TQ, TEL) 2001	instruction	Local	36
S405	DEH044 R02	Spectra Series Power Panelboards - Circuit Breaker Cover Plate (TEY, THQB, THHQB) 2001-08	instruction	Local	10
S407	DEH045 R05	Spectra Series Power Panelboards - Circuit Breaker Cover (SGDA, SGHA, SGLA, SGPA) 2001-08	instruction	Local	5
S397	DEH047 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits, Catalog Numbers AMCB6EB, AMCB4SE, AMCB4EB 2001-04	instruction	Local	13
S398	DEH059 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB6FJ, AMCB3FJ, AMCB2FJ, AMCB4FJ 2001-09	instruction	Local	19
S399	DEH060 R04	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB3GM and AMCB2GM 2001-09	instruction	Local	22
S400	DEH061 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB3KM and AMCB2KM 2001-09	instruction	Local	4
S401	DEH062 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB6EY and AMCB4EY 2001-09	instruction	Local	4

Ref	Doc no.	Title / date	Type	Avail.	Entries
S154	DEH065 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD) 2001-09	instruction	ok	32
S418	DEH070 R02	Spectra Series Power Panelboards - Type AMB Main Lug Kit 2001	instruction	Local	13
S419	DEH071 R02	Spectra Series Power Panelboards - Bolt-On Main Lug Kits (AMB...N/CA/DCA) 2001-10	instruction	Local	22
S157	DEH212 R02	Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S 2001-04	instruction	ok	2
S402	DEH40129 R03	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB6GB and AMCB4GB 2001-09	instruction	Local	19
S145	DEH40150 Rev.No.03	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S146	DEH40151 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S147	DEH40152 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S148	DEH40153 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S149	DEH40154 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (12-pole) unknown	instruction	Local	5
S150	DEH40155 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (12-pole) unknown	instruction	Local	5
S151	DEH40156 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S152	DEH40157 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (6-pole) unknown	instruction	Local	5
S153	DEH40158 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (6-pole) unknown	instruction	Local	5
S156	DEH40392 R01	Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL 2001-04	instruction	Local	8
S422	DEH40471 R02	Spectra Series Power Panelboards - Neutral and Ground Wire Kit for TVSS, Catalog Number ATHMEGNDN 2001-10	instruction	Local	1
S648	DEH40915 R03	Record Plus Molded Case Circuit Breaker Accessories - Plug In Base (FC100) 2004-12	instruction	Local	8
S651	DEH41271 R01	Spectra Series Power Panelboards - Circuit Breaker Cover (Record Plus FE frames) 2002	instruction	Local	7
S656	GEH5547 R02	Spectra Series Fusible Switch Units 30/60 Ampere Expansion Kit 2001-05	instruction	Local	0
S652	GEH5548 R02	Spectra Series Power Panelboards 30-200 Ampere Fusible Switch 2001-09	instruction	Local	5
S653	GEH5550 R04	Spectra Series Power Panelboards 400-600 Ampere Fusible Switch 2001-09	instruction	Local	1
S655	GEH5581 R03	Spectra Series Power Panelboards 60 A/600 V, 100 A/240 V, 100 A/600 V Expansion Kits for Type ADS Fusible Switch Units 2001-06	instruction	Local	0

Ref	Doc no.	Title / date	Type	Avail.	Entries
S657	GEH5582 R02	Spectra Series Fusible Switch Units 200 Ampere Expansion Kit (J and T Fuses) 2001-09	instruction	Local	0
S409	GEH5583 R03	Spectra Series Power Panelboards - Type APP Filler Plates 2001-03	instruction	Local	18
S420	GEH5585 R05	Spectra Series Power Panelboards - Type ANK Neutrals (Model 2) 2001-04	instruction	Local	4
S421	GEH5586 R02	Spectra Series Power Panelboards - Equipment Grounds, Types AEG 10, 21, 21S, 31S 2001-04	instruction	Local	4
S410	GEH5589 R07	Spectra Series Power Panelboards - Type APN and APNB Panelboard Interiors into Type APB Panelboard Enclosures 2001-05	instruction	Local	0
S408	GEH5590 R03	Spectra Series Power Panelboards - Type AFP Filler Plates 2001-07	instruction	Local	8
S654	GEH5597 R04	Spectra Series Power Panelboards 800 & 1200 Ampere Fusible Switch 2001-07	instruction	Local	0
S424	GEH5598 R02	Spectra Series Power Panelboards - Permanent Circuit Markers (APN49, APN99) 2001-05	instruction	Local	2
S412	GEH5623 R04	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC3KM, AMC2KM) 2001-07	instruction	Local	2
S414	GEH5624 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6JK, AMC4JK, AMC3JK, AMC2JK) 2001-10	instruction	Local	6
S417	GEH5625 R04	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6EB, AMC4EB, AMC6EL, AMC6EBS, AMC4EBS, AMC4SE) 2001-07	instruction	Local	10
S411	GEH5626 R04	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC3FLS, AMC2FLS, AMC4FLS) 2001-07	instruction	Local	16
S404	GEH5629 R05	Spectra Series Power Panelboards - Filler Plate Kit AFP6SKS 2001-08	instruction	Local	7
S416	GEH5643 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6QD, AMC4QD) 2001-07	instruction	Local	4
S413	GEH5673 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC4GB, AMC6GB) 2001-07	instruction	Local	3
S155	GEH5674 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM) 2001-07	instruction	Local	41
S415	GEH5677 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6EY, AMC6QB) 2001-07	instruction	Local	4
S425	GEH5683 R02	Spectra Series Power Panelboards - Ground Fault Neutral, 1200 A Maximum 2001-10	instruction	Local	0
S658	GEH5889 R02	Spectra Series Fusible Switch Units 200 Ampere Expansion Kit (H, K and R Fuses) 2001-09	instruction	Local	0
S403	GEH5913 R02	Spectra Series Power Panelboards - Circuit Breaker Mounting Hardware Kits (AHKE1, AHKEL1, AHKF1, AHKG1, AHKJ1, AHKLB1, AHKQ1) 2001-07	instruction	Local	7
S659	GEH5925 R02	Spectra Series Power Panelboards Endwall Kit 2001-10	instruction	Local	0
S660	GEH5926 R02	Spectra Series Power Panelboards Drip-Resistant Cover 2001-10	instruction	Local	0
S423	GEH5930 R04	Spectra Series Power Panelboards - Type ADF Dead Fronts & Type APF Door Fronts 2001	instruction	Local	3

Ref	Doc no.	Title / date	Type	Avail.	Entries
S453	GEJ-3006A / GEG-13610B	GE Installation and Maintenance Instructions GEJ-3006A 'Circuit Breaker Panelboards' with renewal parts list GEG-13610B 'Types DB, NLTQ and NLAB Panelboards, Style 5' (Distribution Assemblies Department) 1969-08	instruction	paywalled	21
S515	Pc. No. 69991A02	TA2-J6500T10 two-cavity connector with voltage tap instructions	instruction	Local	1
S426		ABB empower e-catalog product pages (Spectra Series / A-Series accessories and parts) 2026-10	web	Local	239
S634		Tmax XT Retrofit Kits for Spectra Plug-in Panelboards and Switchboards / ABB eCatalog 'Spectra to Tmax XT Smart Cross Reference'	web	blocked	2

Siemens lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S172	SI-LP-1633	NextGen P1 panelboard brochure (Siemens Canada) unknown (c.2020)	bulletin	Local	3
S169	SIE_CS_P1 / Siemens SIOS 109799956	Type P1 Panelboard data sheet (SIE_CS_P1) 2021-10	bulletin	Local	10
S170		Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf) 2021	bulletin	Local	14
S171		New Revised Type P1 Kits and Accessories (flyer; distributor file MBKQR3150HA.pdf) c.2015-2019	bulletin	Local	22
S167	Discount Schedule A, page 8-13	2005 Electrical Distribution Products price list - Switchboard Replacement and Modification Kits 2005	catalog	Local	26
S166	Power Product Catalogue Section 11	Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/FCII, IPS) 2025-05	catalog	Local	53
S203	SF-17-Sect-07 (SPEEDFAX 2017, pages revised 2017-2020)	Siemens SPEEDFAX Product Catalog, Section 7: Molded Case Circuit Breakers 2020-09	catalog	Local	129
S174	SIE Selection And Application Guide Panelboards (SIOS 109792056)	Panelboards Selection and Application Guide 2016	catalog	Local	48
S168	SPEEDFAX 2007-2008 pp.10-17..10-22	SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22 2007	catalog	Local	0
S589	SPEEDFAX 2011 pp.13-11..13-20	SPEEDFAX 2011 Product Catalog, Section 13 Switchboards - Stock Service Entrance Switchboards (Super Blue Pennant) and Switchboard Replacement Parts and Modification Kits, pp.13-11 to 13-20 (distributor extract) 2011	catalog	Local	87
S254	SPEEDFAX 2017 p. 11-48 (rev 05/15/18)	Siemens SPEEDFAX 2017 Product Catalog p. 11-48 'Type P3 Panelboard Kits and Accessories Selection' (revised 05/15/18) 2018-05	catalog	ok	39
S165	SPEEDFAX Section 11 (last modified 06/24/21)	SPEEDFAX Product Catalog - Section 11 Panelboards 2021-06	catalog	Local	230
S204	SPEEDFAX Section 7 (2021 revision)	Siemens SPEEDFAX, Section 7: Molded Case Circuit Breakers (section last modified 08/17/21) 2021-08	catalog	Local	68
S395	#8177 (12.09.09)	Installation Instructions for TPS3 09 in Lighting Panelboards Type P1 2009-12	instruction	Local	1
S384	11-A-1002-01 Rev. 4	Mounting and Leveling Kit IMK1 instruction card	instruction	Local	1
S352	11-A-1004-01 Rev. 01	EWK1 / EWK2 / EWK1B / EWK2B box end wall kits	instruction	Local	4
S470	11-A-1062-01 Rev. 1 (label 11-1100-01 Rev. 6)	Instructions for drain holes in Type 3R/12 enclosures (WP260/275/290/860/875/890)	instruction	Local	0
S255	11-A-1072-01 Rev. 1	P1SCRWS Branch Connector Screw Kit Instructions	instruction	Local	1
S385	11-A-1096-01 Rev. 02	BK1A Bonding Kit for P1-250 & P1-400 instruction card	instruction	Local	1

Ref	Doc no.	Title / date	Type	Avail.	Entries
S256	11-A-1102-01 Rev. 00	P1-250 Panelboard Kit CNLK30A, CNLK42A & CNLK54A 250A Copper Neutral Lug Kits Installation Instructions (also for P1-400 subfeed)	instruction	Local	3
S257	11-A-1103-01 Rev. 00	P1 Panelboard Kit LNLK30A, LNLK42A & LNLK54A 2/0 Neutral Lug Kits Installation Instructions	instruction	Local	3
S258	11-A-1104-01 Rev. 00	P1-250 Panelboard Kit 2NLK30A, 2NLK42A & 2NLK54A 200% Neutral Lug Kits Installation Instructions	instruction	Local	3
S259	11-A-1105-01 Rev. 00	P1-250 Panelboard Kit MLKA1A & MLKA3A Main / Feed Thru Lugs Installation Instructions	instruction	Local	2
S260	11-A-1106-01 Rev. 00	P1-250 Panelboard Kit MLKC1A & MLKC3A Main / Feed-thru (copper) Lugs Installation Instructions	instruction	Local	2
S261	11-A-1107-01 Rev. 01	P1-400 Panelboard Kit 42NLK30A, 42NLK42A, 42NLK54A Installation Instructions with 200% Neutral	instruction	Local	3
S262	11-A-1108-01 Rev. 01	P1-400 Panelboard Kit 4MLKA1A, 4MLKA3A Main / Feed-thru Lugs Installation Instructions	instruction	Local	2
S263	11-A-1109-01 Rev. 00	P1-400 Panelboard Kit 4MLKC1A, 4MLKC3A Copper Lugs Installation Instructions	instruction	Local	2
S264	11-A-1110-01 Rev. 01	P1-400 Panelboard Kit 4MLKA1B, 4MLKA3B 750 kcmil Main / Feed-thru Lugs Instructions	instruction	Local	2
S265	11-A-1111-01 Rev. 00	P1-250 Panelboard Kit MBKFD1A & MBKFD3A FD Main/Subfeed Breaker Instructions (also P1-400 subfeed)	instruction	Local	2
S466	11-A-1112-01 Rev. 01	P1-250 Panelboard Kit MBKQJ1A & MBKQJ3A QJ Main/Subfeed Breaker Instructions (also P1-400 subfeed; Revised P1 only)	instruction	Local	2
S266	11-A-1113-01 Rev. 00	P1-250 Panelboard Kit MBKED1A & MBKED3A ED Main/Subfeed Breaker Instructions (also P1-400 subfeed)	instruction	Local	2
S267	11-A-1114-01 Rev. 00	P1-250 Panelboard Kit MBKBFA for BL/BQD/GB Main Breaker Installation Instructions	instruction	Local	1
S268	11-A-1115-01 Rev. 02	P1-400 Panelboard Kit MBKJD1A & MBKJD3A JD Main Breaker Kit Instructions	instruction	Local	2
S312	11-A-1115-01 Rev. 05	P1-400 Panelboard Kit MBKJD1A & MBKJD3A (MBKJD3B) JD Main Breaker Kit Instructions, Rev. 05	instruction	Local	1
S269	11-A-1117-01 Rev. 01	250A OEM Chassis Instructions (Revised P1)	instruction	Local	20
S468	11-A-1118-01 Rev. 01	400A OEM Chassis Installation Instructions (Revised P1 panelboard configurations only)	instruction	Local	16
S270	11-A-1119-01 Rev. 00	P1 Panelboard Replacement Parts Kit P1CONACPHAL & P1CONACPHCU A/C-Phase Connector Kits Instructions	instruction	Local	2
S271	11-A-1122-01 Rev. 00	P1 Panelboard Replacement Parts Kit P1CONBPHAL & P1CONBPHCU B-Phase Connector Kits Instructions	instruction	Local	2
S355	11-A-1129-01 Rev. 00	B74FLR preparation for installation instructions (74 in box)	instruction	Local	1
S467	11-A-1130-01 Rev. 00	P1-250 Panelboard Kit MBKQR1A & MBKQR3A for 225A MAX QR Main/Subfeed Breaker Installation Instructions (Revised P1 only)	instruction	Local	2
S301	11-A-1131-01 Rev. 00	P2 Panelboard Kit BBKQR1 Installation Instructions for Branch Mounting of 225A MAX QR Breakers	instruction	Local	1
S302	11-A-1132-01 Rev. 00	P3 Panelboard Kit BBKQR2 Installation Instructions for Branch Mounting of 225A MAX QR Breakers	instruction	Local	1
S273	11-A-1133-01 Rev. 00	Switchboard/Powerpanel Kit SQRD / 6QR2 / SQR Installation Instructions for Branch Mounting of 225A MAX QR Breakers	instruction	Local	3
S317	11-A-1134-01 Rev. 00	MBKQRFK P1 / RP1 Filler Kit for QR Breaker Installation Instructions	instruction	Local	1
S315	11-A-1135-01 Rev. 00	BBKQRP1FK filler kit for horizontally or vertically mounted 225A MAX QR breaker (P2)	instruction	Local	1
S316	11-A-1136-01 Rev. 00	BBKQRP2FK filler kit for dual-mounted horizontal 225A MAX QR breakers (P3)	instruction	Local	1
S314	11-A-1137-01 Rev. 00	MBKQRC1FK C1 Filler Kit for QR Breaker Installation Instructions	instruction	Local	1
S313	11-A-1138-01 Rev. 00	S1 & P1 Panelboard Kit MBKQR1 & MBKQR3 for 225A MAX QR Main/Subfeed Breaker (NOT for Revised P1)	instruction	Local	2
S360	11-A-1139-01 Rev. 00	SQRC QR Breaker Retrofit Field Kit Installation Instructions for P4/P5/SB	instruction	Local	1
S307	11-A-1140-01 Rev. 00	P1-250 Panelboard Kit MBKBL1A & MBKBL3A BL Main/Subfeed Breaker Instructions (also P1-400 subfeed)	instruction	Local	2
S308	11-A-1141-01 Rev. 01	P1-250 Panelboard Kit MBKBC1NBA & MBKBC3NBA BQD / GB Main/Subfeed Breaker Instructions (also P1-400 subfeed)	instruction	Local	2
S353	11-A-1143-01 Rev. 00	EWK3 instructions for special open endwall	instruction	Local	1

Ref	Doc no.	Title / date	Type	Avail.	Entries
S354	11-A-1144-01 Rev. 00	BXXCVR extension cover mounting instructions	instruction	Local	1
S323	11-A-1148-01 Rev. 00	SEBKRP1V1 / SEBKRP1V2 Service Entrance Barrier Kits for Revised P1 Panelboards	instruction	Local	2
S324	11-A-1149-01 Rev. 00	SEBKRP1V3 / SEBKRP1V4 Service Entrance Barrier Kits for Revised P1 Panelboards	instruction	Local	2
S328	11-A-1151-01 Rev. 00	SEBKP2V1 / SEBKP2V2 Service Entrance Barrier Kit for P2 Panelboards	instruction	Local	2
S329	11-A-1153-01 Rev. 00	SEBKP2V3 Service Entrance Barrier Kit for P2 or P3 Panelboards (with or without SEM3)	instruction	Local	2
S330	11-A-1154-01 Rev. 00	SEBKP2V4 / SEBKP3V1 Service Entrance Barrier Kits (vertical mains) for P2 / P3	instruction	Local	3
S331	11-A-1155-01 Rev. 00	SEBKP2V5 Service Entrance Barrier Kit for P2 (ED/CED main)	instruction	Local	1
S332	11-A-1156-01 Rev. 00	SEBKP2V6 Service Entrance Barrier Kit for P2 (vertical ED main)	instruction	Local	1
S333	11-A-1157-01 Rev. 00	SEBKP1P2P3V1 Service Entrance Barrier Kit for Revised P1, P2 or P3	instruction	Local	1
S334	11-A-1158-01 Rev. 00	SEBP4V1 Service Entrance Barrier Kit for P4 or P5	instruction	Local	1
S335	11-A-1159-01 Rev. 00	SEBP4V2 Service Entrance Barrier Kit for P4 or P5	instruction	Local	1
S337	11-A-1160-01 Rev. 00	SEBP5V1 / SEBP5V2 Service Entrance Barrier Kit for P5	instruction	Local	2
S336	11-A-1162-01 Rev. 00	SEBP4V3 Service Entrance Barrier Kit for P4 or P5	instruction	Local	1
S338	11-A-1163-01 Rev. 00	SEBP5V3 Service Entrance Barrier Kit for P5 (Vacu-Break main switch)	instruction	Local	1
S339	11-A-1164-01 Rev. 00	SEBP5V4 Service Entrance Barrier Kit for P5 (HCP main)	instruction	Local	1
S325	11-A-1165-01 Rev. 00	SEBKRP1V5 Service Entrance Barrier Kit for Revised P1 Panelboards	instruction	Local	1
S305	11-A-1166-01 Rev. 00	BBKVA52P3HW hardware kit instructions (3VA52 FAS breaker in P3 twin strap kit; supersedes breaker instructions above 500 V)	instruction	Local	1
S306	11-A-1167-01 Rev. 00	P3 Panelboard Kit BBKVA52P3T Installation Instructions for Branch Mounting of Twin FAS (3VA52) Breakers	instruction	Local	1
S281	11-A-1168-01 Rev. 02	Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA52T / S3VA52TD Installation Instructions for Type 3VA52/61/62 Breaker	instruction	Local	2
S311	11-A-1169-01 Rev. 02	MBKVA5363A 3VA Main Strap Kit Installation Instructions for P1-400 Panelboards	instruction	Local	1
S359	11-A-1171-01 Rev. 01	S3VA52PR provision kit (3VA52/61/62 nut keepers and bus extensions)	instruction	Local	1
S351	11-A-1175-01 Rev. 00	LPLOCK01A / LPLOCK02A replacement panelboard door locks	instruction	Local	2
S396	11-A-1176-01 Rev. 00	LPJSPDNUT01 J-type speed nut replacement kit	instruction	Local	1
S349	11-A-1177-01 Rev. 00	BNK350N 350 MCM narrow neutral lug replacement kit for P2 and P3	instruction	Local	1
S347	11-A-1178-01 Rev. 00	DFP3AP01 replacement Adaptor Plate for BL/BQD/ED/GB/GB2 breaker in P3	instruction	Local	1
S348	11-A-1179-01 Rev. 00	LPP2NB01 neutral lug replacement / addition kit for P2 panelboard	instruction	Local	1
S342	11-A-1180-01 Rev. 01	DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	instruction	Local	7
S469	11-A-1181-01 Rev. 00	DFFPED01 / DFFPFD01 / DFFPQJ01 / DFFPQJ02 replacement filler plates for Siemens lighting panels	instruction	Local	4
S346	11-A-1182-01 Rev. 00	DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	instruction	Local	15
S350	11-A-1184-01 Rev. 00	LPDC01 panelboard directory card kit	instruction	Local	1
S358	11-A-1190-01 Rev. 00	P1DFS400A RP1-400 Panel Deadfront Supports	instruction	Local	1
S309	11-A-1193-01 Rev. 00	MBKVA41A or MBKVA41B BL / BQD / xGB / 3VA4 Main / Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	instruction	Local	2
S326	11-A-1194-01 Rev. 00	SEBKRP1V6 Service Entrance Barrier Kit for Revised P1 Panelboard	instruction	Local	1
S357	11-A-1196-01 Rev. 00	P1DFS250AFT or P1DFS250ANFT RP1-250 Panelboard Deadfront Supports	instruction	Local	2
S356	11-A-1197-00 Rev. 00	NBK01A / NBK02A / NBK03A circuit numbering strips for Revised P1	instruction	Local	3
S389	11-B-1001-01 Rev. 3	CAT. NO. F602 Vacu-Break mounting F1 branch kit, 2.5 in & 5 in high twin units (drawing 11-B-2000-00 Rev 3 / BOM 11-B-2000-02 Rev 6) for SPP/FPP/S4/F1/P4 (shallow box)	instruction	Local	1
S390	11-B-1002-01 Rev. 1	CAT. NO. F657 Vacu-Break mounting F1 branch kit, 7.5 in high twin units (drawing 11-B-2001-00 Rev 3 / BOM 11-B-2001-02 Rev 6) for SPP/FPP/S4/F1/P4 (shallow box)	instruction	Local	1
S391	11-B-1004-01 Rev. 1	CAT. NO. F671 Vacu-Break mounting F1 branch kit, 7.5 in & 10 in high single units (10 in unit) (drawing 11-B-2002-00 Rev 2 / BOM 11-B-2002-04 Rev 7) for SPP/FPP/S4/F1/P4 (shallow box)	instruction	Local	1

Ref	Doc no.	Title / date	Type	Avail.	Entries
S471	11-B-1010-01 Rev. 0	Panelboard Box Installation Instructions (flush installations, 1-piece / 4-piece trim)	instruction	Local	0
S492	11-B-1011-01 Rev. 0	Switchboard/Powerpanel Kit SQJD/6QJ2/SQJ for Branch Mounting Type QJ Breakers Installation Instructions	instruction	Local	3
S364	11-B-1012-01 Rev. 2	Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	instruction	Local	8
S363	11-B-1013-01 Rev. 0	Switchboard/Powerpanel Kit SBLBD/SBL for Branch Mounting Type BL/BQDH Breakers (scanned; read visually)	instruction	Local	2
S495	11-B-1015-01 Rev. 1	Distribution Panel Kit SJ1/SSJ1/SL6/SSL6 for Branch Mounting Type JD/SJD/LD/SLD Breakers Installation Instructions (shallow panelboards)	instruction	Local	4
S277	11-B-1016-01 Rev. 3	Switchboard/Power Panel Kit MG1/MG1D/SLM1/SLM1D for Branch Mounting Sentron LMD and VL MG Frame Breakers	instruction	Local	4
S493	11-B-1017-01 Rev. 0	Switchboard/Powerpanel Kit SMND for Branch Mounting Type MD/ND Breakers Installation Instructions	instruction	Local	1
S494	11-B-1018-01 Rev. 1	Switchboard/Power Panel Kit NG1D for Branch Mounting Type VL N Frame Breakers Installation Instructions	instruction	Local	1
S284	11-B-1019-01 Rev. 01	Switchboard/Power Panel Kit SNBD/SNB for Branch Mounting Type GB Breakers	instruction	Local	2
S272	11-B-1020-01 Rev. 1	SEB / SEBD Installation Instructions - Siemens EB circuit breakers in switchboard or shallow/deep panelboards	instruction	Local	2
S274	11-B-1023-01 Rev. 1	Switchboard (SB1, SB2, SB3) / Power Panel (P4, P5) Kit SDG, SDGD for Branch Mounting Type VL DG Frame Breakers	instruction	Local	2
S381	11-B-1024-01 Rev. 1	Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SFG, SFGD for Branch Mounting Type VL FG Frame Breakers (scanned; read visually)	instruction	Local	2
S276	11-B-1025-01 Rev. 1	Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SJG, SJG1D, SLG, SLGD for Branch Mounting Type VL JG, LG Frame Breakers	instruction	Local	4
S275	11-B-1026-01 Rev. 1	Switchboard (SB1, SB2, SB3) / Power Panel Kit (P5) SJG2D for Branch Mounting Type VL JG Frame Breakers	instruction	Local	1
S318	11-B-1032-01 Rev. 00	LNLK4X11B, LNLK6X17B or LNLK7X20B 2/0 Neutral Lug Kit Instructions for P1 or P3 Panelboards (Revised P1 only)	instruction	Local	3
S320	11-B-1033-01 Rev. 00	CNLK42B or CNLK54B Copper Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)	instruction	Local	2
S321	11-B-1034-01 Rev. 00	2NLK42B or 2NLK54B 200% Neutral Lug Kit for P1-250 Panels (Revised P1 only)	instruction	Local	2
S322	11-B-1035-01 Rev. 00	42NLK54B 200% Neutral Lug Kit for 30, 42, 54 or 66 Circuit P1-400 Panels (Revised P1 only)	instruction	Local	1
S319	11-B-1036-01 Rev. 00	LNLK5X12A or LNLK7X18A 1/0 Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)	instruction	Local	2
S303	11-B-1050-01 Rev. 01	BBKVA5262P2HW hardware kit instructions (3VA52/61/62 breaker to P2/P3 strap kit)	instruction	Local	1
S304	11-B-1051-01 Rev. 01	P2 / P3 Panelboard Kit BBKVA5262P2S Installation Instructions for Branch Mounting 3VA52 / 3VA61 / 3VA62 Circuit Breakers	instruction	Local	1
S344	11-B-1052-01 Rev. 00	DFFPVA5262P2A filler plate (3VA52/61/62 single mount) installation	instruction	Local	1
S345	11-B-1053-01 Rev. 00	DFFPVA5262P2B Provision Plate kit installation	instruction	Local	1
S300	11-B-1055-01 Rev. 02	BBKVA4P2P3 Type 3VA41 or xGB Branch Breaker Mounting Kit Installation Instructions for P2 or P3 Panelboards	instruction	Local	1
S279	11-B-1057-01 Rev. 00	P4 and P5 Power Panel / Distribution Switchboard Kit S3VA41T / S3VA41TD for Branch Mounting of Type 3VA41 or xGB Breakers	instruction	Local	2
S280	11-B-1058-01 Rev. 00	Distribution Switchboard / Power Panel Kit S3VA41TDHD for Branch Mounting of 2-pole 3VA41 or xGB Breakers (high density)	instruction	Local	1
S310	11-B-1059-01 Rev. 00	MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	instruction	Local	8
S327	11-B-1060-01 Rev. 00	SEBKRP1V7 Service Entrance Barrier Kit for RP1 Panelboard	instruction	Local	1
S343	11-B-1061-01 Rev. 00	DFFPVA5262A Filler Plate Kit replacement filler plate (3VA52/61/62)	instruction	Local	1
S288	11-B-1086-01 Rev. 00	Distribution Switchboard / P5 38in wide Power Panel Mounting Kit S3VA53T2D / S3VA54T2D Instructions for Twin-mount 3VA53, 3VA63, 3VA54 or 3VA64 breakers	instruction	Local	2
S341	11-B-1095-01 Rev. 00	SEBPPVA2 Service Entrance Barrier Kit for 3VA55, 3VA65 or 3VA66 Breaker in a P5 Panelboard	instruction	Local	1

Ref	Doc no.	Title / date	Type	Avail.	Entries
S289	11-B-1097-01 Rev. 00	Distribution Switchboard or P5 Power Panel Strap Mounting Kit S3VA55TD for 800A 3VA55/65 or 1000A 3VA66 Breaker	instruction	Local	1
S290	11-B-1101-01 Rev. 00	Switchboard / P5 Powerpanel Strap Mounting Kit S3VA57TD for a 1,200A 3VA57 or 3VA67 Breaker	instruction	Local	1
S383	11-D-1007-01 Rev. 1	P3 Bonding Kit P3BK1 instruction card (drawing 11-D-1007)	instruction	Local	1
S295	11-D-1013-01 Rev. 00	Installation Instructions - general use of Siemens P5 32in or 38in wide Power Panel (P5X60MC120EH32, P5X75MC120EH32, P5X90MC120EH32, P5X90MC120EH)	instruction	Local	1
S382	11-D-1017-01 Rev. 0	EB Deadfront Filler EBF1 installation instruction card (drawing 11-D-1017)	instruction	Local	1
S294	11-D-1018-01 Rev. 0	Power Panel Kit (P4, P5) SMLK12 for Main Lug Mounting (400-1200A)	instruction	Local	1
S291	11-D-1019-01 Rev. 0	Power Panel Kit (P4, P5) SMBKL6 / SMBKL6D for Main Mounting Sentron JD & LD Frame Breakers	instruction	Local	2
S293	11-D-1020-01 Rev. 0	Power Panel Kit (P4, P5) SMBKMG, SMBKMG1D for Main Mounting Type VL MG Frame Breakers	instruction	Local	2
S292	11-D-1022-01 Rev. 1	Power Panel Kit (P4, P5) SMBKLG, SMBKLG1D for Main Mounting Type VL JG, LG Frame Breakers	instruction	Local	2
S491	11-D-1023-01 Rev. 0	Power Panel Kit (P5) SMSKHCP for Main Mounting Type SENTRON HCP Switch Installation Instructions	instruction	Local	1
S297	11-D-1030-01 Rev. 03	Revised P1 (P1-250 / P1-400) Hardware Tightening Torque instructions label	instruction	Local	0
S298	12-A-1030-01 Rev. 01	P2 & P3 Panelboard Kit BBKGB32 Installation Instructions for Branch Mounting Type GB2 Breakers	instruction	Local	1
S278	12-A-1031-01 Rev. 00	Power Panel / Switchboard Kit SGB2 / SGB2D Instructions for Branch Mounting Type GB2 Breakers	instruction	Local	2
S472	12-A-1066-01 Rev. 03	P1 / P2 / P3 Series Panelboard Box Installation for Seismic-Rated Panelboards	instruction	Local	0
S365	12-A-1078-01 Rev. 0	P2 & P3 Panelboard Kit BBKB32 For Branch Mounting of BL & BQD Breakers (scanned; read visually)	instruction	Local	1
S366	12-A-1079-01 Rev. 0	P2 & P3 Panelboard Kit BBKED32 For Branch Mounting of ED Breakers (scanned; read visually)	instruction	Local	1
S367	12-A-1081-01 Rev. 1	P3 Panelboard Kit BBKQ2 For Branch Mounting of QJ Breakers (scanned; read visually)	instruction	Local	1
S299	12-A-1092-01 Rev. 02	P2 & P3 Panelboard Kit BBKNB32 Installation Instructions for Branch Mounting Type GB Breakers	instruction	Local	1
S368	12-A-1093-01 Rev. 1	P3 Panelboard Kit BBKEB32 For Branch Mounting of EB Breakers (scanned; read visually)	instruction	Local	1
S296	12-B-1015-01 Rev. 03	P4 / P5 Series Panelboard Box Installation For Seismic-Rated Panelboards	instruction	Local	0
S486	12-B-2016-01 Rev. 0	F1 10in Deep FPP F672 Twin 200A Vacu-Break Mounting Kit Installation Instructions	instruction	Local	1
S487	12-B-2017-01	F2 12.75in Deep FPP F672D Twin 200A Vacu-Break Mounting Kit Installation Instructions	instruction	Local	1
S485	12-B-2018-01 Rev. 0	Series 5, Series 6, FC-I and FC-II Distribution VB610 Twin 200A Vacu-Break Mounting Kit Installation Instructions	instruction	Local	1
S489	12-B-2108-01 Rev. 0 (p.2 Rev. 1)	Panel Kit 800/1200A Sentron HCP Switch Catalog No. F6162D Installation Instructions	instruction	Local	1
S577	12-C-1010-01 Rev. 6	Blue Pennant Switchboard Installation Instructions - Lug Landing Kit Catalog No. PLL44, PLL46 and PLL48	instruction	Local	3
S282	15-A-1078-01 Rev. 00	Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA53T / S3VA53TD for Single-Mount 3VA53 / 3VA63 Breaker	instruction	Local	2
S283	15-A-1079-01 Rev. 00	Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA54T / S3VA54TD for Single-Mount 3VA54 / 3VA64 Breaker	instruction	Local	2
S340	15-A-1081-01 Rev. 00	SEBPPVA1 Service Entrance Barrier Kit for Switchboard or P4/P5 (3VA53/63/54/64)	instruction	Local	1
S285	31-1143-01 Rev. 4	CAT. NO. 6E62 instruction sheet with drawing 11-5079-00 Rev 10 'ED2, ED4 & ED6 Mounting Series 6 Branch Bus' and BOM 11-5079-05 Rev 8	instruction	Local	1
S286	31-1145-01 Rev. 4	CAT. NO. 6F62 instruction sheet with drawing 11-5098-00 Rev 6 'FD Frame Mounting Series 6 Branch Bus', BOM 11-5098-04 Rev 8, Series 5 adaptor kit 11-5570-01 Rev 3	instruction	Local	2
S473	31-1153-01 Rev. 3	CAT. NO. 6CLE2 instruction sheet: drawing 11-5068-00 Rev 2 'CED6 Breaker Mounting Series 6 Branch Bus', BOM 11-5068-05 Rev 3, Series 5 adaptor kit 11-5570-01	instruction	Local	2

Ref	Doc no.	Title / date	Type	Avail.	Entries
S474	31-1154-01 Rev. 3	CAT. NO. 6CLF1 instruction sheet: drawing 11-5383-00 Rev 5 'CFD6 Breaker Mounting Series 6 Branch Bus', BOM 11-5383-03 Rev 5, Series 5 adaptor kit 11-5570-02	instruction	Local	2
S483	31-1157-01 Rev. 3	CAT. NO. VB657 instruction sheet: drawing 11-5073-00 Rev 7 'Vacu-Break Mounting Series 6 Branch Bus Kit 5in & 7.500in Twin Unit', BOM 11-5073-03 Rev 4	instruction	Local	1
S484	31-1158-01 Rev. 3	CAT. NO. VB671 instruction sheet: drawing 11-5074-00 Rev 5 'Vacu-Break Mounting Series 6 Branch Bus Kit 7.500 & 10.000 Single Unit', BOM 11-5074-04 Rev 4 'Vacu-Break mounting 200A Series 6 copper branch bus'	instruction	Local	1
S482	31-1159-01 Rev. 3	CAT. NO. VB6150 instruction sheet: drawing 11-5075-00 Rev 3 'Vacu-Break Mounting Series 6 Branch Bus Kit 15in Single Unit', BOM 11-5075-02 Rev 4	instruction	Local	1
S287	31-1169-01 Rev. 3	CAT. NO. 6JJ62 instruction sheet with drawing 12-5721 Rev 11 'JD Frame Twin Mounting Series 6 Branch' (-01 = 6JJ62, -02 = SJ2D) and Series 5 adaptor kit 11-5570-02	instruction	Local	3
S475	31-1187-01 Rev. 2	CAT. NO. 6CLJ1 instruction sheet: drawing 12-5719 Rev 10 'CJD frame mount Series 6 - branch' + Series 5 adaptor kit 11-5570-02	instruction	Local	1
S476	31-1189-01 Rev. 3	CAT. NO. 6CLL1 instruction sheet: drawing 12-5720 Rev 11 'CLD frame mount Series 6 - branch' + Series 5 adaptor kit 11-5570-02	instruction	Local	1
S477	31-1194-01 Rev. 3	CAT. NO. 6SCJ1 instruction sheet: drawing 12-5771 Rev 8 'SCJD frame mount Series 6 - branch' + Series 5 adaptor kit 11-5570-02	instruction	Local	1
S478	31-1195-01 Rev. 3	CAT. NO. 6SCL1 instruction sheet: drawing 12-5772 Rev 8 'SCLD frame mount Series 6 - branch' + Series 5 adaptor kit 11-5570-02	instruction	Local	1
S369	31-1200-01 Rev. 1	CAT. NO. SCE - CED6 breaker mounting, S4 copper branch bus (drawing 15-B-2012-00 / BOM 15-B-2012-05 Rev 4)	instruction	Local	1
S370	31-1202-01 Rev. 3	CAT. NO. SF6 - F6 frame mounting S4 copper branch bus (drawing 15-B-2014-00 Rev 4 / BOM 15-B-2014-03 Rev 7)	instruction	Local	1
S371	31-1204-01 Rev. 1	CAT. NO. SCF - 225 A CLF breaker, S4 copper branch bus (drawing 15-B-2016-00 Rev 2 'CLF main/branch kit SPP (shallow)' / BOM 15-B-2016-03 Rev 5)	instruction	Local	1
S372	31-1208-01 Rev. 2	CAT. NO. SCJ - CJD6 (CLJ, CJD6) breaker mounting, S4 copper branch bus (drawing 12-B-2002-00 Rev 6 / BOM 12-B-2002-03 Rev 4)	instruction	Local	1
S481	31-1209-01 Rev. 3	CAT. NO. SSCJ instruction sheet: drawing 12-B-2012-00 Rev 4 'SCJD6 mounting branch bus', BOM 12-B-2012-03 Rev 5 'SCJD6 branch breaker S4 mounting - copper bus'	instruction	Local	1
S373	31-1212-01 Rev. 1	CAT. NO. SCL - CLD6 (CLL, CLD) breaker mounting, S4 copper branch bus (drawing 12-B-2006-00 Rev 7 / BOM 12-B-2006-03 Rev 7)	instruction	Local	1
S374	31-1213-01 Rev. 2	CAT. NO. SSCL - SCLD6 breaker mounting, S4 copper branch bus (drawing 12-B-2013-00 Rev 4 / BOM 12-B-2013-03 Rev 7)	instruction	Local	1
S380	31-1216-01 Rev. 1	CAT. NO. SCED - CED6 branch breaker mounting S5 copper branch bus (drawing 11-5068-00 Rev 2 / BOM 11-5068-06 Rev 3)	instruction	Local	1
S375	31-1218-01 Rev. 2	CAT. NO. SF6D - FD6 frame mounting S4/S5 copper branch bus (drawing 11-5098-00 Rev 6 / BOM 11-5098-03 Rev 9)	instruction	Local	1
S376	31-1220-01 Rev. 1	CAT. NO. SCFD - CFD6 branch breaker mounting S4/S5 copper bus (drawing 11-5383-00 Rev 5 / BOM 11-5383-02 Rev 8)	instruction	Local	1
S480	31-1223-01 Rev. 2	CAT. NO. SJ2D instruction sheet (drawing 12-5721 Rev 11 'JD frame twin mounting Series 6 branch', -02 assembly)	instruction	Local	1
S377	31-1225-01 Rev. 1	CAT. NO. SCJD - drawing 12-5719 Rev 10 'CJD frame mount Series 6 - branch'	instruction	Local	2
S479	31-1226-01 Rev. 2	CAT. NO. SSCJD instruction sheet (drawing 12-5771 Rev 8, -02 assembly)	instruction	Local	1
S379	31-1229-01 Rev. 2	CAT. NO. SCLD - drawing 12-5720 Rev 11 'CLD frame mount Series 6 - branch' (-01 = 6CLL1, -02 = SCLD)	instruction	Local	2
S378	31-1230-01 Rev. 1	CAT. NO. SSCLD - drawing 12-5772 Rev 8 'SCLD frame mount Series 6 - branch'	instruction	Local	2
S392	31-1239-01 Rev. 2	CAT. NO. F602D Vacu-Break mounting kit for 2.5 in high twin units (30A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	instruction	Local	1
S393	31-1240-01 Rev. 2	CAT. NO. F657D Vacu-Break mounting kit for 5 in and 7.5 in high twin units (30, 60, 100A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	instruction	Local	1
S394	31-1242-01 Rev. 2	CAT. NO. F671D Vacu-Break mounting kit for 7.5 in and 10 in high single units (200A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	instruction	Local	1
S488	31-1243-01 Rev. 2	CAT. NO. F6150D instruction sheet: drawing 11-B-2007-00 Rev 2 'Vacu-Break mounting F2 branch bus kit 15in single unit', BOM 11-B-2007-02 Rev 3	instruction	Local	1

Ref	Doc no.	Title / date	Type	Avail.	Entries
S565	I.L. No.	Wrap-around terminals for Frame JG (TW1JG600)	instruction	Local	3
S566	I.L. No.	Wrap-around terminal for CG (3TW1CG20, 3TA1CG30)	instruction	Local	2
S550	I.L. No. 806579A01	TSSG3A terminal end shield, 3-pole (CQD / NGG / NGB) 2006	instruction	Local	1
S576	I.L. No. 806846A01	Plug-in Mounting Base for Frame NG	instruction	Local	3
S573	I.L. No. 806847A01	Plug-in Mounting Base for Frame DG, FG (PCBD*/PCBF*/PCXD*/PCXF*)	instruction	Local	11
S574	I.L. No. 806848A01	Plug-in Mounting Base for Frame JG, LG	instruction	Local	4
S568	I.L. No. 806856A03	Compression lugs for Frame NG (12CLN500 3VL9750-4TM31)	instruction	Local	1
S560	I.L. No. 806863A02	Front Busbar Connection for Frame DG, FG, JG, LG (FBCD/FBCF/FBCJ/FBCL)	instruction	Local	7
S556	I.L. No. 806866A01	Rear Studs / Rear Terminals for Frame DG, FG	instruction	Local	16
S557	I.L. No. 806867A03	Rear Terminals for Frame JG, LG	instruction	Local	9
S558	I.L. No. 806869A02	Rear Terminals for Frame MG, NG	instruction	Local	2
S559	I.L. No. 806870A01	Rear Terminals for Frame NG	instruction	Local	3
S563	I.L. No. 806871A03	Wrap-around terminals for Frame DG (TW1DG20, TA1DG30, TC1DG30 families)	instruction	Local	8
S564	I.L. No. 806872A03	Wrap-around terminals / lugs for Frame FG (TW1FG350, TAW1FG350, TCW1FG350)	instruction	Local	8
S571	I.L. No. 806875A03	Terminal Al connector for Frame PG (TA6PG750, 3TA6PG750, LMAP1600)	instruction	Local	2
S567	I.L. No. 806877A04	Terminal Al/Cu connectors for Frame NG (TA3NG750, TA4NG500 families)	instruction	Local	8
S554	I.L. No. 806883A02	Terminal Covers for Frame CG, DG, FG (TSLF3/TSLF4, 3VL9300-8CB31/41)	instruction	Local	2
S555	I.L. No. 806884A04	Terminal Shield for Frame JG-MG (TSLL/TSSL/TSLM/TSSM)	instruction	Local	10
S551	I.L. No. 806886A02	Interphase Barrier for Frame CG, DG, FG (3VL9300-8CE01 / IPBF4 3VL9300-8CE41)	instruction	Local	2
S552	I.L. No. 806887A02	Interphase Barrier for Frame JG, LG, MG (3VL9600-8CE01 / IPBM4 3VL9600-8CE41)	instruction	Local	2
S553	I.L. No. 806888A02	Interphase Barrier for Frame NG, PG (3VL9800-8CE01 / IPBP4 3VL9800-8CE41)	instruction	Local	2
S575	I.L. No. 806890A01	Plug-in Mounting Base for Frame MG	instruction	Local	4
S572	I.L. No. 806903A03	Mounting Screw Kit MSKM4 3VL9600-8SB41 for MG-PG	instruction	Local	1
S561	I.L. No. 806940A02	Power Distribution Connectors for Frame DG, FG (TA3DG02, TA6DG04, TA3FG20, TA6FG04)	instruction	Local	8
S562	I.L. No. 806941A03	Power Distribution Connectors for Frame JG (TA6JG20, TA12JG04)	instruction	Local	4
S570	I.L. No. 806951A01	Lug Mounting Assembly / Terminal Al connector for Frame PG (LMAP1600, TA6PG750)	instruction	Local	1
S569	I.L. No. 806952A02	Breaker Mounting Base for Frame PG (MBPG1600, MBPG1601, TA4P750)	instruction	Local	3
S548	I.L. No. 809802A01	TA6GG04 power distribution connector instructions (Frame NGG)	instruction	Local	1
S543	I.L. No. 814517A	MSQR3 Mounting Screw Kit instructions (QR)	instruction	Local	1
S542	I.L. No. 814532A	3TA1QR300 / 3TC1QR250 / TA1QR300 / TC1QR250 Wire Connector instructions (Frame QR) 2015	instruction	Local	4
S541	I.L. No. 814533A	CCQ250 compression lugs instructions (Frame QR) 2015	instruction	Local	1
S588	P/N 48100001 0101 Rev.B	Installation Instructions for Power Mod Modular Metering Lug Kits (LK1xxxxN2 / LK3xxxxN2 table) 2009	instruction	Local	30
S583	P/N 48100004 0101 Rev.B	Power Mod Modular Metering Lug Kits LK12500 and LK32500 installation instructions	instruction	Local	2
S585	P/N 48100005 0101 Rev.B	Power Mod Modular Metering Lug Kits LK13500 and LK33500 installation instructions	instruction	Local	2
S587	P/N 48100006 0101 Rev.B	Power Mod Modular Metering Lug Kits LK14500 and LK34500 installation instructions	instruction	Local	2
S584	P/N 48100007 0101 Rev.B	Power Mod Modular Metering Lug Kits LK11750 and LK31750 installation instructions	instruction	Local	2
S586	P/N 48100008 0101 Rev.B	Power Mod Modular Metering Lug Kits LK13750 and LK33750 installation instructions	instruction	Local	2
S580	Pc. No. 110871A02	Cat. No. TA5P600, TA4P750 Pressure Wire Connectors (PD and PM frame) 2000	instruction	Local	2

Ref	Doc no.	Title / date	Type	Avail.	Entries
S507	Pc. No. 410211A05	TA1FD350A Wire Grip Kit instructions 2010	instruction	Local	1
S508	Pc. No. 410211B03	TC1FD350 Wire Grip Kit instructions (F, FD, FF & FM frame) 2000	instruction	Local	1
S505	Pc. No. 410901A01	Replacement plug-in adapters for 'E' & 'CLE' frame breakers (TCE2, TCE3)	instruction	Local	2
S513	Pc. No. 410902A01	Replacement plug-in tulip adapters TCF2 / TCF3 for FD frame	instruction	Local	2
S524	Pc. No. 410903A01	TCJ2, TCJ3 Plug-In Adapters instructions (JD/LD/JF/LF)	instruction	Local	2
S534	Pc. No. 410904A01	TCM2, TCM3 Plug-In Adapters instructions (MD, MM & MF frame)	instruction	Local	2
S535	Pc. No. 410905A01	TCN2, TCN3 Plug-In Adapters instructions (MD, ND, MM, NM, MF & NF)	instruction	Local	2
S506	Pc. No. 411755A00	TA6FD04 Special Purpose Wire Connector instructions (FD frame Sentron) 2003	instruction	Local	1
S539	Pc. No. 411757A01	Wire Connector Shield #PRDBS1 instructions (PD frame)	instruction	Local	1
S514	Pc. No. 411776A00	TA6JD20 Distribution Lug Kit instructions (JD, LD, JXD, LXD, JM, LM)	instruction	Local	1
S578	Pc. No. 411777A01	TA6ED06 Distribution Lug Kit instructions (E, ED & EM frame)	instruction	Local	1
S503	Pc. No. 59624A01	Instruction Sheet for Rear Connecting Stud for E-Frame Breaker (RS2641, RS2642, RS2643, RS2644)	instruction	Local	4
S512	Pc. No. 60121A02	Plug-in mounting assemblies for F, FD, FM and FF frame (PC4753, PC4754, PM4754)	instruction	Local	3
S510	Pc. No. 60171A00	Instructions for Installation of Circuit Breaker Rear Connecting Studs RS4755 and RS4756 (I-T-E F, FD, FF) 1989	instruction	Local	2
S504	Pc. No. 60303A02	Plug-in mounting assemblies and adapters for 'E' & 'CLE' frame breakers (PC2637, PC2638, PC2657, PC2658, PM2657, PM2658)	instruction	Local	6
S523	Pc. No. 61423A02	Plug in Adapters Cat. No. PC5777, PC5778, PC5660 and PC5661 instructions (JD/LD frame)	instruction	Local	4
S522	Pc. No. 61442A02	Rear Connecting Studs Cat. No. RS5773, RS5774, RS5783, RS5784 instructions	instruction	Local	6
S500	Pc. No. 61538A01	LD1-E100 Load Side Lug Kit instructions (I-T-E E, ED & EF) 1987	instruction	Local	1
S540	Pc. No. 61936A01	Cat. No. TA1Q300 terminal lug instructions (QJ, QJ2, QJH2) 1988	instruction	Local	1
S581	Pc. No. 62152A00	Cat. No. TCIQ250 connector instructions (QJ, QJ2, QJH2, QJ2-H, HQJ2H) 1986	instruction	Local	1
S502	Pc. No. 62843A01	MSE6-100 Breaker Mounting Screws instructions (E & ED frame) 2000	instruction	Local	1
S509	Pc. No. 62980B02	MSF6-50 Breaker Mounting Screws instructions (FD and FM frame) 2000	instruction	Local	1
S498	Pc. No. 62992A01	LD1-E060 Load Side Lug Kit instructions (I-T-E E, ED & EF) 1987	instruction	Local	1
S520	Pc. No. 63306A02	TC2-J6500 connector instructions 2000	instruction	Local	1
S518	Pc. No. 63306B02	TC1-J6600 connector instructions 2000	instruction	Local	1
S517	Pc. No. 63306C02	TA1-L6750 connector instructions 2000	instruction	Local	1
S496	Pc. No. 64900A02	TA1E6125 Lug Kit instructions (E, ED, EF & EM frame) 2000	instruction	Local	1
S516	Pc. No. 66456A01	MSJ6 Mounting Kit instructions (I-T-E JXD, LXD, JM and LM)	instruction	Local	1
S519	Pc. No. 69796A04	TA2-J6500 Wire Grip Kit instructions 2010	instruction	Local	1
S538	Pc. No. 73632A00	Connect-All Mounting Block Assemblies Cat. No. MB9301 (PD), MBR9302 (RD), MM9301 and MM9302 (PM) instructions	instruction	Local	4
S499	Pc. No. 73935A01	LN1-E100 Lug Kit (30-100 A) instructions (E, ED & EF frame) 1987	instruction	Local	1
S497	Pc. No. 73937A02	SA1-E025 Wire Grip Kit instructions (E, EF, ED & EM frame) 2000	instruction	Local	1
S533	Pc. No. 760777A02	Plug-in Adaptors Cat. No. PC5662, PC5663 and PM5663 (MD, MM & MF frame)	instruction	Local	3
S532	Pc. No. 76682A01	Plug-in Adaptors Cat. No. PC5664, PC5665, PC5666, PC5667 and PM5666 (MD, ND, MF, MM, NM & NF)	instruction	Local	5

Ref	Doc no.	Title / date	Type	Avail.	Entries
S530	Pc. No. 77933A00	Rear connecting straps Cat. No. RS5785 & RS5786 instructions (I-T-E MD, ND, MF & NF)	instruction	Local	2
S526	Pc. No. 77942 Rev. 0P	Panelboard Connector Straps Cat. No. CS3637R, CS3638R, CS3639R instructions (MD & ND frame) 1989	instruction	Local	3
S545	Pc. No. 800496D00 / 800496E00 / 800496F00	Face Mounting Bracket kits CQDFMB1 / CQDFMB2 / CQDFMB3 for CQD circuit breakers	instruction	Local	3
S544	Pc. No. 800496G00 Rev. 5P	Screw Mounting Kit CQDSMK for CQD breakers	instruction	Local	1
S525	Pc. No. 800818A01	Rear Connecting Studs Cat. No. RS5787, RS5788 instructions (LMD frame) 1994	instruction	Local	2
S547	Pc. No. 806632A01 Rev. 1P	NGG mounting kit (4) #6-32 UNC screws	instruction	Local	1
S549	Pc. No. 806633A01 Rev. 1P	3TC1Q1 Lug Kit (for use with NGG)	instruction	Local	1
S501	Pc. No. 82689A01	CCE 125 compression lug instructions 2000	instruction	Local	1
S511	Pc. No. 82691A02	CCF 250 compression lug instructions	instruction	Local	1
S521	Pc. No. 82692A01	CCL 600 compression connector instructions	instruction	Local	1
S531	Pc. No. 82693A01	CCM800 Series A, CCM800K2, CCM800K3 compression connector instructions	instruction	Local	3
S579	Pc. No. 82694A00	CCN1200 Series A, CCN1200K2, CCN1200K3 compression lug instructions (ND frame)	instruction	Local	3
S528	Pc. No. 83439A04	Pressure Wire Connectors for MD, ND, MF, NF, MM & NM (TA4P8500, TA4N8500, TA2K8750, TA2N8750, TA3P8750, TA3N8750, TA4H500)	instruction	Local	7
S529	Pc. No. 83445A00	Wire Connector Shield #NDTS instructions (MD, ND, MM & NM) 2000	instruction	Local	1
S536	Pc. No. 83614A01	Cat. No. TC5R600 Pressure Wire Connector instructions (I-T-E PD, PM, RD) 2000	instruction	Local	1
S537	Pc. No. 83623A02	Cat. No. TA6R600 Pressure Wire Connector instructions (PD, PM, RD) 2000	instruction	Local	1
S527	Pc. No. 99460A04	Pressure Wire Connectors (TA2K500, TA3K350, TC2K500, TC3K350, TA3K500, TA2N750) instructions	instruction	Local	6
S361		Lighting Panel Ground Bus Information: P1-P2-P3 (EGK / ECGK / IGK / ICGK)	instruction	Local	4
S490		Cat. No. F6162D connection strap kit - Horizontal Mount Drawing / Group Mounting Assembly (Horizontal Mount Only)	instruction	Local	1
S546		Face mounting plate FMPG1 / FMPG2 / FMPG3 for NGG & CQD	instruction	Local	3
S582		CCQ 225 compression lug instructions (QJ2, QJH2, QJ2-H)	instruction	Local	1
S173	US2:MBKBFA	Data sheet US2:MBKBFA - KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER 2021-01-06	web	Local	1

Federal Pacific Electric

Ref	Doc no.	Title / date	Type	Avail.	Entries
S615	Rev. 4/05	UBI Replacement Bulk Circuit Breakers - Your Source for Replacement Circuit Breakers for Use in Federal Pacific, Pushmatic and Zinsco Load Centers 2005-04	distributor	Local	58
S212		Federal Pacific Electric panelboard connector kits	web	ok	0
S213		About Federal Pacific Electric Equipment (history)	web	ok	0

Other manufacturers

Ref	Doc no.	Title / date	Type	Avail.	Entries
S12		Elliott Electric spec sheet: P41X25 SWBD/PRL4 1X Filler 1.375"H 25"W Fits 36" 44" 45"	distributor	Local	1

Appendix B Bibliography and Source Register

S1 [SRC-00001] Eaton. *Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a, PRL2a, PRL3a, PRL4)*. RP01400001E (Z25020). 2021-04. Type: oem_renewal_parts. URL: https://eatonarabia.com/wp-content/uploads/2022/03/pow-r-line-1.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/pow-r-line-1.pdf Note: Effective April 2021, supersedes December 2020. 40 pp. Mirror hosted on eatonarabia.com (Eaton distributor site). Primary source for kit tables.

S2 [SRC-00002] Eaton / Cutler-Hammer. *Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F, PRL5P, PRL1a/2a-LX, Pow-R-Command)*. RP01400001E. 2009-02. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/catalogs/USESI_426974_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_426974_catalog.pdf Note: Effective February 2009; supersedes RP.38F.01.T.E pages 1-48 dated February 2000. 44 pp. Distributor-hosted (US Electrical Services) copy of OEM PDF. Contains older PRL4 kit numbers (KPRL4FD etc.) and PRL5P section.

S3 [SRC-00003] Eaton. *Renewal Parts RP01400001E - Current Eaton panelboards*. RP01400001E. 2017-10. Type: oem_renewal_parts. URL: https://elliottelectric.com/Media/5155C62H01-CHS (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400001E_2017-10_elliott_mirror.pdf Note: Effective October 2017, supersedes February 2009. Served by Elliott Electric as the spec sheet for 5155C62H01. Used to bracket when part numbers changed (still lists KPRL4FD, 4180B03, 4176B68, 4178B06H01).

S4 [SRC-00004] Eaton. *Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E*. RP01414001E. 2011-01. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/catalogs/USESI_196328_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_196328_catalog.pdf Note: Effective January 2011. 16 pp. Identical content also at https://assets.usesi.com/product-media/brochures/USESI_426974_brochure.pdf (saved as USESI_426974_brochure.pdf). Includes PRL3a blank cover widths, PRL4 blank cover widths, PRL4 connector kits (KPRL4LD/MD/ND/45XS) and Pow-R-Kit order form.

S5 [SRC-00005] Eaton. *Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, PRL3-LX, CDP/HCDP, FDP)*. RP01400002E (Z13209). 2013-02. Type: oem_renewal_parts. URL: https://novapart.co/media/2/6/6/F38703722D40D662.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_novapart_mirror.pdf Note: Effective February 2013, supersedes April 2009. 20 pp. Mirror on novapart.co (landing page https://novapart.co/datasheet/farnell:2192454/ contains promotional text aimed at AI assistants - ignored).

S6 [SRC-00006] Eaton. *Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control*. CA08100003E. 2020-06. Type: oem_catalog. URL: https://eatonarabia.com/wp-content/uploads/2022/03/panelboard-and-lighting-control.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/panelboard-and-lighting-control.pdf Note: 135 pp. Pow-R-Line Xpert (PRL1X/2X/3X/3E/4X/4DX/4F) selection guide p. V2-T3-2, panelboard selection guide p. V2-T3-11, terminal tables V2-T3-12/13.

S7 [SRC-00007] Eaton. *Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/2a-LX/1R/2R)*. CA08104001E (Tab 22). 2018-01. Type: oem_catalog. URL: https://eatonarabia.com/wp-content/uploads/2022/03/eaton-panelboard-cag-tb01400003e-tab-22.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-panelboard-cag-tb01400003e-tab-22.pdf Note: 84 pp, January 2018 sheets. Table 22.0-2 selection guide p. 22.0-5; PRL1a p. 22.1-1; PRL2a p. 22.2-1; PRL3a p. 22.3-1/22.3-2; PRL3E p. 22.3-5; PRL4 p. 22.4-1/22.4-2.

S8 [SRC-00008] Rexel USA. *Rexel USA listing: Filler Plate, Panelboard, PRL3A, for Panelboards Built After April 2019 (42C8083H01)*. Type: distributor. URL: https://www.rexelusa.com/p/2273430/eaton/filler-plate-panelboard-prl3a-for-panelboards-built-after-april-2019/42c8083h01 (accessed 2026-10-21) Note: Spec: Type Filler Plate; Length 4.220 in.

S9 [SRC-00009] Rexel USA. *Rexel USA listing: Panel Board, PRL3A, Cover Filler Plate, 1P for F-Frame Breakers (4178B06H01)*. Type: distributor. URL: https://rexelusa.com/p/120408/eaton/panel-board-prl3a-cover-filler-plate-1p-for-f-frame-breakers/786685467672/4178b06h01 (accessed 2026-10-21) Note: UPC 786685467672; description says 'for panels built PRIOR to April 2019'; color black; 1 pole.

S10 [SRC-00010] Elliott Electric Supply. *Elliott Electric listing: KPRL4FD - PRL4 Connector Kit For Twin MTD 3P EHD, FD, FDB, HFD*. Type: distributor. URL: https://elliottelectric.com/P/Item/CHD/KPRL4FD/Alternate (accessed 2026-10-21) Note: UPC 782114795941; 225 A; 3-phase; product type 'PRL4 Conn Kit Twin MTD 3P E/F-FRM BKR'; package dims 9.0 x 1.5 x 3.0 in; listed weight 17 lb (as given); UL 67; shown in stock.

S11 [SRC-00011] Rexel USA. *Rexel USA listing: PRL4X PD2 1 POLE FILLER (PRXP4PD2FILL1)*. Type: distributor. URL: https://www.rexelusa.com/p/2925374/eaton/prl4x-pd2-1-pole-filler/786689814915/prxp4pd2fill1 (accessed 2026-10-21) Note: UPC 786689814915; Pow-R-Xpress (unassembled PRL4X) context.

S12 [SRC-00012] Elliott Electric Supply. *Elliott Electric spec sheet: P41X25 SWBD/PRL4 1X Filler 1.375"H 25"W Fits 36" 44" 45"*. Type: distributor. URL: https://www.elliottelectric.com/Media/P41X25-ETN (accessed 2026-10-21) Local copy: docs/library/OTH/P41X25-ETN_elliott_spec.pdf Note: Description 'Eaton, PRL4- 1X Blank Cover'; UPC 621037246102; 2.0 lb.

S13 [SRC-00013] Eaton. *Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions*. CA08100014E. 2018-06. Type: oem_renewal_parts. URL: https://www.revereelectric.com/ASSETS/DOCUMENTS/ITEMS/EN/EATON_1MMMSB_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Vol12_CA08100014E_revereelectric_EATON_1MMMSB_Catalog.pdf Note: Full 734-page Volume 12 hosted by distributor Revere Electric (mirror of OEM PDF). Tabs carry mixed dates: Tab 4 Panelboards dated June 2018; Tab 3 MCCB, Tab 5 Loadcenters and Tab 15 Distribution Switchboards dated October 2016. Key pages: V12-T4-1..T4-23 (panelboards: replacement charts, CDP/FDP/PRL layouts, renewal-parts doc index), V12-T15-1..T15-6 (switchboards incl. WF/WRP, ES, Pow-R-Line C history), V12-T3-10..T3-12 (Westinghouse breaker dimensions, last-manufactured dates), V12-T3-80..87 (panelboard-only replacement breakers RE/REH/RHF...). Eaton-hosted tab copy: https://www.eaton.com/content/dam/eaton/support/poweredge/aftermarket/vol12-tab04.pdf (eaton.com fetch failed from container).

S14 [SRC-00014] Eaton. *Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CDP/HCDP, FDP)*. RP01400002E. 2013-02. Type: oem_renewal_parts. URL: https://www.farnell.com/datasheets/2307937.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_2013_farnell.pdf Note: 20 pages, Publication No. RP01400002E / Z13209, effective February 2013, supersedes April 2009. Distributor (Farnell) mirror of OEM PDF. Contains CDP connector kits (Table 19 p.14), CDP retrofit kits (Tables 16-18 pp.12-13), FDP connector/retrofit kits (Tables 20-21 pp.17-18), PRL1/2/3 replacement connectors, neutral/ground bars, trim locks and clamps. Pricing in PL01400002E (not found).

S15 [SRC-00015] Eaton. *Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition)*. RP01400002E (2009). 2009-04. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/brochures/USESI_501159_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_2009_usesi.pdf Note: Earlier edition hosted by distributor US Electrical Services. Kit catalog numbers identical to 2013 edition except the hardware-only example: 2009 shows 'KCDPFD100H', 2013 shows 'KCDPFB100-H'.

S16 [SRC-00016] Eaton. *Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, PRL5P)*. RP01400001E (2017). 2017-10. Type: oem_renewal_parts. URL: https://www.elliottelectric.com/Media/5155C62H01-CHS-2-1-SpecificationSheet.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400001E_2017_elliott.pdf Note: 36 pages, effective October 2017, supersedes February 2009. Distributor (Elliott Electric) mirror. PRL4 breaker connector kits Table 37 p.24, fusible connector kits Table 38 p.25, retrofit kits Tables 39-40 p.26, PRL4 blank covers Table 36 p.24.

S17 [SRC-00017] Eaton. *Renewal Parts RP01400001E — Pow-R-Line Xpert and legacy panelboards*. RP01400001E. 2022-05. Type: oem_renewal_parts. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/pow-r-line-renewal-parts-rp01400001e.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/rp01400001e_2022_cl.pdf Note: 40 pages, effective May 2022, supersedes April 2021. eaton.com URL timed out from container; identical file path retrieved from Eaton Chile mirror http://www.eatontransmisiones.cl/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/pow-r-line-renewal-parts-rp01400001e.pdf . PRL4X/PRL4 breaker connector kits Tables 46-47 pp.32-33 (new KPRL4X.. numbers), fusible kits Table 48 p.34.

S18 [SRC-00018] Eaton. *Switchboards—Low Voltage (Consulting Application Guide Tab 21)*. CA08104001E Tab 21 (TB01500003E). 2018-04. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_515260_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_515260_catalog_CA08104001E_Tab21.pdf Note: Distributor-hosted copy of Eaton Consulting Application Guide Section 21 (April 2018). Pow-R-Line C description p.21.0-8/21.0-9, Pow-R-Line i p.21.0-11, PRLC distribution layout guide with device X-space Figure 21.1-9 p.21.1-12, main lug space Table 21.1-11 p.21.1-11, Integrated Facility System p.21.6-1.

S19 [SRC-00019] Eaton. *Eaton product specifications — KPRL4KDS*. KPRL4KDS spec sheet. Type: oem_web. URL: https://www.elliottelectric.com/Media/KPRL4KDS-CHD-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/KPRL4KDS-specsheet.pdf Note: Eaton-generated product specification sheet (distributor-hosted). UPC 782114795996; 25.5 x 9.3 x 3.2 in; 9.25 lb; UL Listed.

S20 [SRC-00020] Eaton. *Eaton product specifications — KPRL4KDT*. KPRL4KDT spec sheet. Type: oem_web. URL: https://www.elliottelectric.com/Media/KPRL4KDT-CHD-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/KPRL4KDT-specsheet.pdf Note: Eaton-generated product specification sheet (distributor-hosted). UPC 782114796412; 9.85 lb; 'UL 67'; '44-inch box width required'. Listed dimensions 9 x 2 x 3.2 in look like packaging/data error.

S21 [SRC-00021] Eaton. *Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt*. CA08100014E Tab 5. 2016-10. Type: oem_renewal_parts. URL: https://media.suthlbr.com/images/downloads/vendor/18446/EATON_102581945_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Vol12_Tab5_2016_suthlbr_EATON_102581945_Catalog.pdf Note: 30-page excerpt; BR history (Bryant, Bridgeport CT; Challenger 1988; Jackson MS; Lincoln IL) p.V12-T5-2; BR replacement parts pp.V12-T5-14..16.

S22 [SRC-00022] Eaton. *Eaton Pow-R-Line CS switchboards instruction manual*. IB015002EN. 2021-11. Type: oem_instruction. URL: https://www.manualslib.com/manual/2585212/Eaton-Pow-R-Line-Cs.html (accessed 2026-10-21) Note: Read via ManualsLib web view (pages 3, 8, 17). Eaton-hosted PDF https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/switchboards/canada/eaton-pow-r-line-cs-switchboards-instruction-manual-ib015002en-ca.pdf could not be downloaded (timeout). Appendix A Table 2 busbar torque p.17.

S23 [SRC-00023] Eaton. *Pow-R-Line switchboards instruction manual*. IM01500001E. 2021-05. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/switchboards/pow-r-line-switchboard-manual-im01500001e.pdf (accessed 2026-10-21) Status: blocked. Local copy: docs/library/EAT/pow-r-line-switchboard-manual-im01500001e.pdf Note: Download from eaton.com and eaton.com.cn failed (timeout). Known only from search snippet (effective May 2021, supersedes Feb 2020).

S24 [SRC-00024] eBay seller (surplus). *eBay listing: EATON KPRL4KDS POW-R-LINE C einzelne Montage Panelboard Stecker Kit 400A 3P*. Type: surplus. URL: https://www.ebay.de/itm/187106607578 (accessed 2026-10-21) Note: Seen only as search-result title/snippet; page not opened. Listing title associates KPRL4KDS with 'Pow-R-Line C'.

S25 [SRC-00025] various distributors. *Distributor listings for Eaton PRL4 connector kits (Crescent Electric, Rexel, Platt, Elliott, Gexpro, Dixon)*. Type: distributor. URL: https://crescentelectric.com/product/57375/eaton-panelboard-connector-kit-copper-connectors-mounting-brackets-covers-hardware-and-instructions-for-ehd-fd-fdb-hfd-fdc-breakers-three-phase-three-pole-225a (accessed 2026-10-21) Note: Seen as search snippets: KPRL4FD described 'for EHD, FD, FDB, HFD, FDC breakers three-phase three-pole 225A'; Elliott marks KPRL4FD inactive; Dixon lists KPRL4LFD3 'CON KIT FD+LFD PRL4'; Gexpro lists KPRL4MC as single-mount kit for MDL/HMDL; Crescent lists KPRL4ND 'PRL4 connector kit for ND/HND breakers'.

S26 [SRC-00026] Surplus Record. *Surplus Record listing: Westinghouse Pow-R-Line C 4000 A 240 V 3PH3W 2-section switchboard*. Type: surplus. URL: https://surplusrecord.com/listing/westinghouse-pow-r-line-c-4000-amp-240v-3ph3w-2-section-switchboard-367548/ (accessed 2026-10-21) Note: Search snippet only: 'PROVISIONS FOR (2) KD, (4) LD, (2) ND, 3 POLE CIRCUIT BREAKERS' — shows Westinghouse-branded PRLC with Series C group-mounted provisions.

S27 [SRC-00027] Schneider Electric (Square D). *Panelboards: Digest Section 9 (Square D Digest, Section 9 Panelboards)*. 0100CT2401-SEC-09. 2026-07-16. Type: oem_catalog. URL: https://download.schneider-electric.com/files?p_Doc_Ref=0100CT2401-SEC-09 (accessed 2026-10-21) Local copy: docs/library/SQD/0100CT2401-SEC-09.pdf Note: 75 pp. PDF page N = printed page 9-N. Same tables are published online in Digest Plus (s_dightml). Fetched via download.schneider-electric.com with p_Doc_Ref only (www.se.com returns 403).

S28 [SRC-00028] Schneider Electric (Square D). *Schneider Electric Digest Plus - Section 9: Panelboards (online HTML pages: NQ Panelboard Accessories, NQ Merchandised Main Circuit Breaker Interiors, NF Panelboard Accessories, I-Line Merchandised Panelboard Accessories, etc.)*. Digest 0100CT2401 (online). 2026. Type: oem_catalog. URL: https://productinfo.se.com/nadigest/5c51d645347bdf0001f1f280/Master/17709_MAIN%20(bookmap)_0000061751.xml/$/NQPanelboardAccessories-369ADC9F (accessed 2026-10-21) Note: HTML pages fetched with curl (browser UA) for all 40 Section 9 topics; text identical to s_dig tables. WebFetch returned 403.

S29 [SRC-00029] Schneider Electric (Square D). *NQ Circuit Breaker Panelboards Catalog, Class 1640*. 1640CT0801. 2021-08. Type: oem_catalog. URL: https://download.schneider-electric.com/files?p_Doc_Ref=1640CT0801 (accessed 2026-10-21) Local copy: docs/library/SQD/1640CT0801.pdf Note: 36 pp.; PDF metadata 2021-10-11.

S30 [SRC-00030] Schneider Electric (Square D). *I-Line Circuit Breaker Panelboards Class 2110 Catalog*. 2110CT9701. 2025-02-18. Type: oem_catalog. URL: https://download.schneider-electric.com/files?p_Doc_Ref=2110CT9701 (accessed 2026-10-21) Local copy: docs/library/SQD/2110CT9701.pdf Note: Downloaded as zip containing the PDF (bookmap dated 02.18.25). 56 pp.

S31 [SRC-00031] Schneider Electric (Square D). *I-Line Circuit Breaker Power Distribution Panelboards Information Manual, Class 2110*. 80043-309-20 Rev. 10. 2026-07. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-309-20 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-309-20.pdf Note: Breaker installation/removal, neutral bonding strap torque, PJC-7201 joint compound, blank fillers.

S32 [SRC-00032] Schneider Electric (Square D). *Square D NQ and NF Lighting Panelboards brochure*. unknown. Type: oem_bulletin. URL: https://media.distributordatasolutions.com/schneider/2018q1/a23e368f6ea0182c58fb583425aad3af83156efc (accessed 2026-10-21) Local copy: docs/library/SQD/NQ_NF_Lighting_Panelboards_brochure_dds.pdf Note: Distributor-hosted (DDS) copy of OEM brochure; general marketing only.

S33 [SRC-00033] Schneider Electric (Square D). *Product data sheet NQMB2HJ - NQ Panelboard Acc. Main Breaker Kit 225A, H/J Frame*. NQMB2HJ datasheet. 2018-02. Type: oem_web. URL: https://media.distributordatasolutions.com/schneider/2018q1/03b2d20294d188dd4e4c0c4480124bfe3e1deed7.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/NQMB2HJ_datasheet_dds.pdf Note: Schneider-generated product data sheet mirrored by distributor data service.

S34 [SRC-00034] Schneider Electric (Square D). *NQOD Panelboard Main Circuit Breaker (250 A Maximum) and Adapter Kit Installation, Class 1630*. 80043-699-03. 2006-03. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-699-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-699-03.pdf Note: Replaces 80043-699-02 (02/2005). Kit catalog number not printed in bulletin.

S35 [SRC-00035] Schneider Electric (Square D). *Q-Frame Main Circuit Breaker (225 A Maximum) and Adapter Kit Installation onto an NQ Panelboard, Class 1640*. 80043-722-02. 2009-03. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-722-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-722-02.pdf Note: Replaces 80043-722-01 (01/2008). Covers NQMB2Q and NQMB2Q14.

S36 [SRC-00036] Schneider Electric (Square D). *NQ Panelboard Mechanical Main Lug Kit (100, 225, 400, and 600 Amp)*. 80043-724-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-724-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-724-01.pdf Note: Covers NQCUM1, NQCUM2, NQCUM4, NQCUM6, NQALMA6.

S37 [SRC-00037] Schneider Electric (Square D). *H- or J-Frame Main Circuit Breaker and Adapter Kit (NQ), Rev. 01*. 80043-725-02. 2015-09. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-725-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-725-02.pdf Note: Covers NQMB2HJ and NQMB2HJ14.

S38 [SRC-00038] Schneider Electric (Square D). *KI-Frame Main Circuit Breaker (225 A Maximum) and Adapter Kit Installation onto an NQ Panelboard*. 80043-726-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-726-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-726-01.pdf Note: Covers NQMB2KI.

S39 [SRC-00039] Schneider Electric (Square D). *LA/LH Main Circuit Breaker and Adapter Kit Installation onto an NQ Panelboard, Class 1640*. 80043-727-02. 2010-05. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-727-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-727-02.pdf Note: Covers NQMB4LA.

S40 [SRC-00040] Schneider Electric (Square D). *225 A Feed-Through Lug Kit Installation onto an NQ Panelboard*. 80043-728-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-728-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-728-01.pdf Note: Covers NQFTL2L and NQFTL2H.

S41 [SRC-00041] Schneider Electric (Square D). *100 and 225 A Sub-Feed Lug Kit Installation onto an NQ Panelboard*. 80043-729-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-729-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-729-01.pdf Note: Covers NQSFL1 and NQSFL2.

S42 [SRC-00042] Schneider Electric (Square D). *Sub-Feed Circuit Breaker and Adapter Kit Installation onto an NQ Panelboard*. 80043-730-01. unknown (08/2018 addendum attached). Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-730-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-730-01.pdf Note: Covers NQSFB2Q and NQSFB2HJ (225 A max).

S43 [SRC-00043] Schneider Electric (Square D). *Dual Sub-Feed Circuit Breaker and Adapter Kit Installation onto NQ Panelboard, Rev. 02*. 80043-731-02. 2024-07. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-731-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-731-02.pdf Note: Replaces Rev. 01 09/2015. Covers NQSFB4Q and NQSFB4HJ.

S44 [SRC-00044] Schneider Electric (Square D). *NQ Panelboard 3-, 6-, 12-, 18-, and 24-inch Trim and Rail Extension Kit*. 80043-732-02. 2012-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-732-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-732-02.pdf Note: Replaces 80043-732-01 (01/2008). Covers NQ3RDE..NQ24RDE.

S45 [SRC-00045] Schneider Electric (Square D). *NQ Panelboard Crimp Main Lug Kit (100, 225, 400, and 600 Amp), Class 1640*. 80043-733-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-733-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-733-01.pdf Note: Covers NQALV1/2/4/6, NQCUV1/2/4/6.

S46 [SRC-00046] Schneider Electric (Square D). *Neutral Kit Installation onto an NQ Panelboard*. 80043-734-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-734-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-734-01.pdf Note: Covers NQN1CU, NQN2CU, NQN6CU, NQNL1, NQNL2, NQNL2ACCY, NQNL4.

S47 [SRC-00047] Schneider Electric (Square D). *NQ Branch Connector Replacement Kit, Installation onto an NQ Panelboard, Class 1640*. 80043-735-01. 2008-02. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-735-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-735-01.pdf Note: Covers SKNQBC.

S48 [SRC-00048] Schneider Electric (Square D). *NF/NFOM Panelboards Class 1670 Instruction Bulletin, Rev. 06*. 80043-741-03. 2023-02. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-741-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-741-03.pdf Note: General NF panelboard bulletin.

S49 [SRC-00049] Schneider Electric (Square D). *400 A Sub-Feed Lug Kit Installation onto an NQ Panelboard*. 80043-745-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-745-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-745-01.pdf Note: Covers NQSFL4.

S50 [SRC-00050] Schneider Electric (Square D). *400 A Feed-Through Lug Kit Installation onto an NQ Panelboard*. 80043-746-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-746-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-746-01.pdf Note: Covers NQFTL4L and NQFTL4H.

S51 [SRC-00051] Schneider Electric (Square D). *NQ and NF Equipment Space Kit*. 80043-753-01. 2008-03. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-753-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-753-01.pdf Note: Covers NQES18 and NFES18.

S52 [SRC-00052] Schneider Electric (Square D). *NF Panelboard Neutral Kit Installation onto an NF Panelboard*. 80043-754-02. 2009-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-754-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-754-02.pdf Note: Covers NFN1CU, NFN2CU, NFN6CU, NFNL1, NFNL2, NFNL4.

S53 [SRC-00053] Schneider Electric (Square D). *NF Panelboard 125 A and 250 A Sub-Feed Lug Kit*. 80043-755-01. 2008-04. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-755-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-755-01.pdf Note: Covers NF125SFL, NF250SFL.

S54 [SRC-00054] Schneider Electric (Square D). *NF Panelboard 400 A Sub-Feed Lug Kit*. 80043-756-01. 2008-04. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-756-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-756-01.pdf Note: Covers NF400SFL.

S55 [SRC-00055] Schneider Electric (Square D). *NF Panelboard 125 A and 250 A Feed-Through Lug Kit Installation onto an NF Panelboard*. 80043-757-02. 2009-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-757-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-757-02.pdf Note: Covers NF125FTL, NF250FTL.

S56 [SRC-00056] Schneider Electric (Square D). *NF Panelboard 400 A Feed-Through Lug Kit Installation onto an NF Panelboard*. 80043-758-02. 2009-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-758-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-758-02.pdf Note: Covers NF400FTL.

S57 [SRC-00057] Schneider Electric (Square D). *NF Panelboard Dual Sub-Feed Circuit Breaker Adapter Kit Installation onto an NF Panelboard, Rev. 02*. 80043-760-03. 2024-07. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-760-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-760-03.pdf Note: Replaces Rev. 01 09/2015. Covers NF600SFBH, NF600SFBJ.

S58 [SRC-00058] Schneider Electric (Square D). *NF Panelboard Mechanical Main Lug Kit (125, 250, 400, and 600 Amp)*. 80043-761-01. 2008-05. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-761-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-761-01.pdf Note: Covers NFCUM1, NFCUM2, NFCUM4, NFCUM6.

S59 [SRC-00059] Schneider Electric (Square D). *NF Panelboard Crimp Main Lug Kit (125, 250, 400, and 600 A)*. 80043-762-01. 2008-06. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-762-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-762-01.pdf Note: Covers NFALV1/2/4, NFCUV1/2/4 (and 600 A versions).

S60 [SRC-00060] Schneider Electric (Square D). *NF Panelboard Trim and Rail Extension Kit (6-, 12-, and 18-inch)*. 80043-763-01. 2008-06. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-763-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-763-01.pdf Note: Covers NF6RDE, NF12RDE, NF18RDE.

S61 [SRC-00061] Schneider Electric (Square D). *NF Panelboard H- or J-Frame Main Circuit Breaker Adapter Kit Installation onto an NF Panelboard, Rev. 01*. 80043-764-03. 2015-09. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-764-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-764-03.pdf Note: Covers N150MH, N250MJ.

S62 [SRC-00062] Schneider Electric (Square D). *NF Panelboard FI- or KI-Frame Main Circuit Breaker and Adapter Kit Installation onto an NF Panelboard*. 80043-765-02. 2009-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-765-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-765-02.pdf Note: Covers N100MFI, N250MKC.

S63 [SRC-00063] Schneider Electric (Square D). *NF Panelboard L-Frame Main Circuit Breaker Adapter Kit Installation onto an NF Panelboard*. 80043-766-03. 2009-08. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-766-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-766-03.pdf Note: LA/LH (L-frame) main kit; catalog number not printed in extracted text (Digest lists N400M for LA/LH).

S64 [SRC-00064] Schneider Electric (Square D). *NF Panelboards Branch Connector Kit Installation onto an NF Panelboard*. 80043-767-01. 2008-08. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-767-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-767-01.pdf Note: Covers SKNF250, SKNF600.

S65 [SRC-00065] Schneider Electric (Square D). *NF Panelboards Gutter-Mounted Neutral Bonding Strap Installation onto an NF Panelboard*. 80043-768-01. 2008-08. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-768-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-768-01.pdf Note: No catalog number found in text.

S66 [SRC-00066] Schneider Electric (Square D). *NF Column-Width Panelboards Branch Connector Kit Installation onto an NF Panelboard*. 80043-770-01. 2008-09. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-770-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-770-01.pdf Note: No catalog number found in text.

S67 [SRC-00067] Schneider Electric (Square D). *Backfed Main Circuit Breaker Barrier Kit Installation onto an NQ or NF Panelboard, Classes 1640 and 1670*. 80043-774-01. 2009-04. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-774-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-774-01.pdf Note: Replaces 80043-687-03 (08/2007). Covers NQODBFMB20, NFBFMB20.

S68 [SRC-00068] Schneider Electric (Square D). *Condo Riser Neutral Assembly Kit Installation onto an NQ Condo Riser Panelboard, Class 1640*. 80043-778-01. 2009-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-778-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-778-01.pdf Note: Mentions NQN6CR, NQNL6CR.

S69 [SRC-00069] Schneider Electric (Square D). *Neutral Bonding Screw Kit Installation onto an NQ 14 Inch Panelboard*. 80043-786-01. 2010-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-786-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-786-01.pdf Note: Kit: one 10-32 x 1 3/4 in neutral bonding screw; torque 10-12 lb-in. No catalog number in text.

S70 [SRC-00070] Schneider Electric (Square D). *Liebert 400 A Sub-Feed Lug Kit Installation onto a Liebert NQ Panelboard*. 80043-792-01. 2012-03. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-792-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-792-01.pdf Note: Mentions NQSFL4L.

S71 [SRC-00071] Schneider Electric (Square D). *QOB Circuit Breaker Installation when Equipped with Jaw Accessory Kit QO1PJ15, Class 7267 (NQ Panelboards)*. 80043-809-01. 2013-11. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-809-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-809-01.pdf

S72 [SRC-00072] Schneider Electric (Square D). *Installation and Replacement of Fingersafe IP2X per IEC 60529 Main Circuit Breaker Covers and U.S. Service Entrance Devices, Rev. 04*. 80043-839-01. 2023-04. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-839-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-839-01.pdf Note: Tables 1-6: I-Line, NQ, NF line lug cover / SE barrier kits.

S73 [SRC-00073] Schneider Electric (Square D). *I-Line Panelboards - Barrier Kits Installation Instructions, Rev. 03*. 80043-844-01. 2026-06. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-844-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-844-01.pdf Note: RPINTBK800HCP, RPINTBK1200HCPC(IP2X), RPINTBK1200HCR.

S74 [SRC-00074] Schneider Electric (Square D). *I-Line Panelboards - Expanded Neutral Assembly Installation*. 80043-845-01. 2020-05. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-845-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-845-01.pdf Note: Expanded neutral kit table (ILHCJ..ESN, ILHCPSU..ESN, ILHCPRU..ESN).

S75 [SRC-00075] Schneider Electric (Square D). *Main Circuit Breaker 400/600 A and Sub-Feed Circuit Breaker 400 A Kit for PowerPacT L-Frame, Installation onto an NQ Panelboard (NQMB6PPL)*. 80043-847-01. 2021-11. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-847-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-847-01.pdf

S76 [SRC-00076] Schneider Electric (Square D). *Main Circuit Breaker and Sub-Feed Circuit Breaker Deadfront Replacement Kit for PowerPacT L-Frame (NQRPLMB6PPL, NFRPLMB6PPL, NQRPLMB63RPPL, NFRPLMB63RPPL)*. 80043-848-01. 2020-10. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-848-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-848-01.pdf

S77 [SRC-00077] Schneider Electric (Square D). *NQ/NF U.S. Condo Riser Panelboards Neutral Bonding Strap Installation (NFNQCRBOND46, NFCRBOND8)*. 80043-853-01. 2020-08. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-853-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-853-01.pdf

S78 [SRC-00078] Schneider Electric (Square D). *NQ200AN Neutral Terminal Kit*. 80043-858-01. 2020-08. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-858-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-858-01.pdf

S79 [SRC-00079] Schneider Electric (Square D). *Main Circuit Breaker Deadfront Replacement Kit for PowerPacT M-Frame and P-Frame (NFRPLMB8PPMP)*. 80043-861-01. 2021-07. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-861-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-861-01.pdf

S80 [SRC-00080] Schneider Electric (Square D). *Main Circuit Breaker 400/600 A or Sub-Feed Circuit Breaker 400 A Kit for PowerPacT L-Frame, Installation onto an NF Panelboard (N600MPPL), Class 1670*. 80043-866-01. 2021-10. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-866-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-866-01.pdf

S81 [SRC-00081] Schneider Electric (Square D). *Sub-Feed Circuit Breaker 600 A Kit for PowerPacT L-Frame, Installation onto an NF Panelboard (NF600SFBPPL), Class 1670*. 80043-868-01. 2021-10. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-868-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-868-01.pdf

S82 [SRC-00082] Schneider Electric (Square D). *I-Line Panelboard Grounding Bar Mounting Instructions*. 80043-312-03. 2006-11. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-312-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-312-03.pdf Note: ECN 06H0252.

S83 [SRC-00083] Schneider Electric (Square D). *QMBHW and QMBJW Circuit Breaker Adapter Units Installation, Class 4620*. 80043-339-04. 2005-05. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-339-04 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-339-04.pdf Note: Replaces 80043-339-03.

S84 [SRC-00084] Schneider Electric (Square D). *I-Line (HCJ, HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation, Class 2110, Rev. 01*. 80030-695-02. 2019-02. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80030-695-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80030-695-02.pdf Note: Blank extension selection table HLW/HLN.

S85 [SRC-00085] Schneider Electric (Square D). *Schneider Electric FAQ FA102748: What is the SKNQOD225 and where is it used?*. FA102748. unknown. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA102748 (accessed 2026-10-21) Note: Read via WebFetch (summarised by fetch tool, not verbatim).

S86 [SRC-00086] Schneider Electric (Square D). *Schneider Electric FAQ FA124209: What is the parts breakdown on an SKNQOD225?*. FA124209. 2008-06-06 (modified 2026-04-22). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA124209 (accessed 2026-10-21) Note: Read via WebFetch (summarised by fetch tool, not verbatim).

S87 [SRC-00087] Schneider Electric (Square D). *Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO / NQOB / NQOD / NEHB / NF panelboards*. FA332061. 2017-11-17 (modified 2023-03-07). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA332061 (accessed 2026-10-21) Note: Read via WebFetch (summarised by fetch tool, not verbatim).

S88 [SRC-00088] Schneider Electric (Square D). *Schneider Electric FAQ FA123424: Will the main breaker adapter kits for NQ panelboards work with NQOD panelboards?*. FA123424. 2008-04-07 (modified 2022-12-05). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA123424 (accessed 2026-10-21) Note: Read via WebFetch (summarised by fetch tool, not verbatim).

S89 [SRC-00089] Schneider Electric (Square D). *Schneider Electric FAQ FA128003: What is the replacement for NQOD30L400CU?*. FA128003. 2009-07-14 (modified 2026-04-17). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA128003 (accessed 2026-10-21) Note: Read via WebFetch (summarised by fetch tool, not verbatim).

S90 [SRC-00090] Schneider Electric (Square D). *Schneider Electric FAQ FA121228: What is the part number for the branch fingers or connector kits for a 125 amp and 250 amp NF panelboard interiors?*. FA121228. 2007-04-10 (modified 2026-06-15). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA121228 (accessed 2026-10-21) Note: Read via WebFetch (summarised by fetch tool, not verbatim).

S91 [SRC-00091] Schneider Electric (Square D). *Schneider Electric FAQ FA166748 (NEHB obsolescence / NF replacement)*. FA166748. unknown. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA166748 (accessed 2026-10-21) Status: blocked. Note: Page itself returned 403; content known only from web-search snippet: NEHB obsoleted 1995, EH/EHB no longer available, replaced by NF with EDB/EGB/EJB.

S92 [SRC-00092] Crescent Electric Supply. *Crescent Electric listing: NQ Panelboard Acc. Connector Kit 225A 3P (SKNQOD225)*. unknown. Type: distributor. URL: https://www.crescentelectric.com/product/178985/nq-panelboard-acc-connector-kit-225a-3p (accessed 2026-10-21) Note: Search-snippet only; listing marked Discontinued.

S93 [SRC-00093] Crescent Electric Supply. *Crescent Electric listing: NQMB2Q NQ Adapter Kit, For Use With QBL/QDL/QGL/QJL Main Circuit Breaker, 100 to 225 A*. unknown. Type: distributor. URL: https://www.crescentelectric.com/product/44398/panelboard-accessory-nq-main-breaker-kit-225a-q-frame (accessed 2026-10-21) Note: Search-snippet only.

S94 [SRC-00094] Schneider Electric (Square D). *Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switchboards Catalog (Class 2710, 2741, 2742)*. 2700CT1101. 2012-02. Type: oem_catalog. URL: https://media.distributordatasolutions.com/schneider_synd/2023q1/documents/3ec11ffaa483c317fee9fe851a4472117ace727c.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/dds_3ec11.pdf Note: Distributor-hosted (DistributorDataSolutions) copy of OEM PDF, 60 pp. A newer 2700CT1101 (v02, 2025-12, ~140 MB) exists on se.com but was not retrieved.

S95 [SRC-00095] Schneider Electric (Square D). *I-Line Circuit Breaker Panelboards Catalog, Class 2110*. 2110CT9701R07/19. 2019-07. Type: oem_catalog. URL: https://media.distributordatasolutions.com/schneider2/2020q1/20ebda625aea586bc898b8e30954a51d38425d30.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/dds_20ebda.pdf Note: Distributor-hosted copy of OEM PDF, 24 pp. Current revision is v2.1 2025-02-18 (se.com, blocked).

S96 [SRC-00096] Schneider Electric (Square D). *QMB Fusible Panelboards Catalog, Class 4620*. 4620CT9601R07/15. 2015-07. Type: oem_catalog. URL: https://download.se.com/files?p_Doc_Ref=4620CT9601&p_enDocType=Catalog&p_File_Name=4620CT9601.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/4620CT9601.pdf Note: Retrieved via WebFetch (curl 403). se.com page says document is current but may reference obsolete products.

S97 [SRC-00097] Schneider Electric (Square D). *I-Line (HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation, Instruction Bulletin, Class 2110*. 80030-695-02. 2011-09. Type: oem_instruction. URL: https://media.distributordatasolutions.com/schneider/2018q1/f4c97d51a6c117544e2493c3367e6bba5774eb47 (accessed 2026-10-21) Local copy: docs/library/SQD/dds_f4c97d.pdf Note: Trilingual EN/ES/FR, 10 pp. States it applies to I-Line panelboards and QED2 switchboards manufactured after 2011.

S98 [SRC-00098] Schneider Electric. *Product data sheet QMB15BLW - Panelboard blank filler plate*. QMB15BLW data sheet. 2023-04-12. Type: oem_web. URL: https://media.distributordatasolutions.com/schneider_synd/2023q2/documents/55f1316a17cc332c2db81fbd11361b088e686058.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/dds_55f131.pdf

S99 [SRC-00099] Schneider Electric. *FAQ FA225625: Do the merchandised Speed-D switchboards with QMB branch devices come with blank fillers for the unused space?*. FA225625. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA225625 (accessed 2026-10-21)

S100 [SRC-00100] Schneider Electric Canada. *FAQ FA100365: blank filler catalog numbers for current design QMB panelboards*. FA100365. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA100365 (accessed 2026-10-21)

S101 [SRC-00101] Schneider Electric. *FAQ FA243887: What is the difference between an I-Line Blank Filler and a Blank Extension?*. FA243887. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA243887 (accessed 2026-10-21) Note: Gives internal part numbers for HNM/HLN/HLW fillers and extensions; WebFetch summary (not verbatim).

S102 [SRC-00102] Schneider Electric. *FAQ FA112712: What blank fillers are required in an I-Line panel when an LI breaker is replaced with a KI?*. FA112712. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA112712 (accessed 2026-10-21)

S103 [SRC-00103] Schneider Electric. *FAQ FA93287: blank extensions for the wide side of an HCW panelboard*. FA93287. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA93287 (accessed 2026-10-21)

S104 [SRC-00104] Schneider Electric Canada. *FAQ FA108059: Do the blank filler plates and extensions for I-Line panelboards fit the QED switchboards?*. FA108059. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA108059 (accessed 2026-10-21)

S105 [SRC-00105] Schneider Electric. *FAQ FA117096: difference between plug-on and bolt-on I-Line connections*. FA117096. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA117096 (accessed 2026-10-21) Note: References Data Bulletin 0600DB1004.

S106 [SRC-00106] Schneider Electric. *FAQ FA129562: mounting screw for a PowerPact H or J frame breaker I-Line mounting bracket*. FA129562. Type: oem_web. URL: https://www.se.com/au/en/faqs/FA129562/ (accessed 2026-10-21)

S107 [SRC-00107] Schneider Electric. *FAQ FA103561: mounting bracket screw for an FA or FH I-Line breaker*. FA103561. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA103561 (accessed 2026-10-21)

S108 [SRC-00108] Schneider Electric. *FAQ FAQ000274446: replacement mounting screw for L-frame breaker inside I-Line panelboard*. FAQ000274446. Type: oem_web. URL: https://www.se.com/us/en/faqs/FAQ000274446 (accessed 2026-10-21)

S109 [SRC-00109] Schneider Electric. *FAQ FA125949: Can you replace the mounting bracket on the load end of I-Line breakers?*. FA125949. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA125949 (accessed 2026-10-21)

S110 [SRC-00110] Schneider Electric. *FAQ FA118475: deadfront brackets on an I-Line HCN3254-2 panelboard*. FA118475. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA118475 (accessed 2026-10-21)

S111 [SRC-00111] Schneider Electric. *FAQ FA116225: plug-button for unused holes in NEMA 1 and 3R QED-1 and QED-2 switchboards (incl. Speed-D)*. FA116225. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA116225 (accessed 2026-10-21)

S112 [SRC-00112] Schneider Electric. *FAQ FA108122: QED cover screw part number*. FA108122. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA108122 (accessed 2026-10-21) Status: blocked. Note: 403 on direct fetch; content (21427-20401, 1/4-20 x 1-1/4 self-tapping screw) seen only in search-engine snippet.

S113 [SRC-00113] Schneider Electric. *FAQ FA125924: replacement handle for an outdoor QED switchboard*. FA125924. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA125924 (accessed 2026-10-21)

S114 [SRC-00114] Schneider Electric Canada. *FAQ FA124494: door and frame hinges for a QED2, CMM, or Speed-D NEMA 3R switchboard*. FA124494. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA124494 (accessed 2026-10-21)

S115 [SRC-00115] Schneider Electric. *FAQ FA96877: deadfront screws used on Square D panelboards (NF, I-Line, NQ, QMB)*. FA96877. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA96877 (accessed 2026-10-21)

S116 [SRC-00116] Schneider Electric. *FAQ FA121592: Are Square D QED switchboards able to have additional (splice-to) sections installed?*. FA121592. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA121592 (accessed 2026-10-21)

S117 [SRC-00117] Schneider Electric. *FAQ FA308905: Do QED 2 switchboards NEMA 1 or 3R come with a solid bottom?*. FA308905. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA308905/ (accessed 2026-10-21)

S118 [SRC-00118] Schneider Electric. *FAQ FAQ000269509: I-Line subfeed lug kits to tap I-Line bus (SL100...SL1200P7)*. FAQ000269509. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FAQ000269509/ (accessed 2026-10-21) Status: blocked. Note: Content seen via search-engine summary only (direct fetch 403).

S119 [SRC-00119] Schneider Electric. *Square D QMB / QED-2 FAQ group (QED-2 Series 2 QMB mounting height 63 in.; QED-2 I-Line section limits 3000 A single row / 2000 A double row)*. FAQ000279508 / FAQ000257217. Type: oem_web. URL: https://www.se.com/us/en/faqs/FAQ000279508 (accessed 2026-10-21) Status: blocked. Note: Content seen via search-engine summaries only (direct fetch 403).

S120 [SRC-00120] Standard Electric Supply / Steiner Electric / Crescent Electric. *Distributor listings for QMB blank fillers (QMB1BLW, QMB3BLW, QMB6BLW) - kit contents*. Type: distributor. URL: https://www.standardelectricsupply.com/Square-D-QMB3BLW-Filler-Plate-Kit (accessed 2026-10-21) Note: Seen via search summaries; Crescent lists QMB1BLW as discontinued.

S121 [SRC-00121] Standard Electric Supply / Crescent Electric / Steiner Electric / Rexel. *Distributor listings for I-Line blank extensions (HLW4BL qty 5, 6.35 in W x 4.5 in H; HLW1BL qty 3; HLN4BL)*. Type: distributor. URL: https://www.standardelectricsupply.com/Square-D-HLW4BL-I-Line-Blank-Plate (accessed 2026-10-21) Note: Seen via search summaries. Note conflicting qty for HLW1BL (se.com product title says qty 5; distributors and FAQ FA112712 say kit of 3).

S122 [SRC-00122] Rexel USA / Royal Wholesale Electric / others. *Distributor listings for QED-2 OEM I-Line switchboard interiors (CF20R63C, CF25R63C, CF20RJ63C, CF30RJ63C, CF16RJ63C36)*. Type: distributor. URL: https://www.rexelusa.com/p/1207792/square-d/panelboard-interior-qed-2-i-line-63-height-3000a-copper-bus-center-feed/cf30rj63c (accessed 2026-10-21) Note: Seen via search summaries only.

S123 [SRC-00123] Crescent Electric / Steiner Electric / Forberg Smith. *Distributor listings for QMB switch units (QMB368W 1200 A 24 in.; QMB322TD; QMB362T1; QMB323TD)*. Type: distributor. URL: https://www.crescentelectric.com/product/90087/switch-unit-qmb-fusible-panelboards-1200a-24-inch-3-pole-600vac-max (accessed 2026-10-21) Note: Seen via search summaries.

S124 [SRC-00124] Crescent Electric / Steiner Electric / MB Glick. *Distributor listings for SL400 I-Line sub-feed lug kit*. Type: distributor. URL: https://www.crescentelectric.com/product/227088/panelboard-accessory-i-line-lug-kit-subfeed-400a-6-in (accessed 2026-10-21) Note: Crescent title: 'I-Line, lug kit, subfeed, 400A, 6 in'.

S125 [SRC-00125] Schneider Electric (Square D). *OEM QED-2 Switchboard I-Line Interiors, Single-Row and Double-Row OEM Interior Products Catalog*. 2700CT1601. 2023-01-11 (v1.3). Type: oem_catalog. URL: https://www.productinfo.schneider-electric.com/power_style_qed_2/2700ct1601-oem-qed-2-switchboard-i-linetm-interiors-catalog/English/2700CT1601.pdf (accessed 2026-10-21) Status: blocked. Note: Akamai 403 via curl and WebFetch; download.se.com also 403. HIGH-VALUE: contains OEM interior selection tables.

S126 [SRC-00126] Schneider Electric (Square D). *Power-Style QED-2 Switchboards Instruction Bulletin*. 80043-055-16. 2024-06. Type: oem_instruction. URL: https://www.productinfo.schneider-electric.com/power_style_qed_2/80043-055-power-style-qed-2-switchboards-instruction-bulletin/English/80043-055-016_en.pdf (accessed 2026-10-21) Status: blocked.

S127 [SRC-00127] Schneider Electric (Square D). *Square D I-Line Plug-on Connection Design and Advantages, Data Bulletin*. 0600DB1004. 2010-12-01. Type: oem_bulletin. URL: https://www.se.com/us/en/download/document/0600DB1004 (accessed 2026-10-21) Status: blocked.

S128 [SRC-00128] forums.mikeholt.com. *Mike Holt forum thread: SQ-D replacement parts (I-Line bussing not sold as DIY parts)*. Type: forum. URL: https://forums.mikeholt.com/goto/post?id=1409627 (accessed 2026-10-21) Note: Anecdotal; seen via search summary.

S129 [SRC-00129] Schneider Electric. *QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T -> QMB321T + QMB306LEX; QMB306T Series 1 -> QMB322TD + QMB306LEX)*. FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA123288 (accessed 2026-10-21) Status: blocked. Note: Direct fetch 403 (rate-limited); content seen only through search-engine summary - treat as C until verified.

S130 [SRC-00130] Schneider Electric Canada. *FAQ FA92305: repair parts for a QMB363TW, Series E1 (E01)*. FA92305. Type: oem_renewal_parts. URL: https://www.se.com/ca/en/faqs/FA92305 (accessed 2026-10-21)

S131 [SRC-00131] Schneider Electric. *FAQ FA92286: repair parts for a QMB367W, Series E1 (E01)*. FA92286. Type: oem_renewal_parts. URL: https://www.se.com/us/en/faqs/FA92286 (accessed 2026-10-21)

S132 [SRC-00132] Schneider Electric. *FAQ FA119872: replacement for a QMB310T, series 1 through 4 switch*. FA119872. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA119872 (accessed 2026-10-21)

S133 [SRC-00133] Schneider Electric. *FAQ FA127541: replacement for a QMB3620*. FA127541. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA127541 (accessed 2026-10-21)

S134 [SRC-00134] Schneider Electric. *FAQ FA88047: replacement for a QMB3606T*. FA88047. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA88047 (accessed 2026-10-21)

S135 [SRC-00135] Schneider Electric. *FAQ FA100372: replacement for a QMB3260 600 A QMB switch*. FA100372. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA100372 (accessed 2026-10-21)

S136 [SRC-00136] Schneider Electric. *FAQ FA128647: replacement parts for a QMB3240*. FA128647. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA128647 (accessed 2026-10-21)

S137 [SRC-00137] Schneider Electric. *FAQ FA122651: replacement switch for the old QMB2240, 2P 400 A QMB switch*. FA122651. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA122651 (accessed 2026-10-21)

S138 [SRC-00138] Schneider Electric. *FAQ FA242815: Does Schneider offer a 1200 A QMB switch? Where is it used?*. FA242815. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA242815 (accessed 2026-10-21)

S139 [SRC-00139] Schneider Electric. *FAQ FA122202: QMB blanks for current style QMB panelboards and switchboards with QMB distribution*. FA122202. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA122202 (accessed 2026-10-21)

S140 [SRC-00140] Schneider Electric. *FAQ FA113960: replacement branch switch for the old QMB210T Series 1 through 4*. FA113960. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA113960 (accessed 2026-10-21)

S141 [SRC-00141] Schneider Electric. *FAQ FA118445: part number for a 300 A / 3P circuit breaker unit for an old QMB Saflex panelboard*. FA118445. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA118445 (accessed 2026-10-21)

S142 [SRC-00142] MB Glick / others. *MB Glick surplus listing: Square D QMB3606T QMB Saflex panelboard switch unit 60 A Series 4 (and used QMB 3606T Series 2 Saflex twin unit listing)*. Type: surplus. URL: https://mbglick.com/shop/panelboard-switch/square-d-qmb3606t-qmb-saflex-panelboard-switch-unit-60a-max-600hp-series-4 (accessed 2026-10-21) Note: Seen via search summary only.

S143 [SRC-00143] GE Industrial Solutions. *BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; Renewal Parts)*. BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014). 2014-07. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_18438_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_18438_catalog.pdf Note: 52-page OEM PDF (PDF title 'GE BuyLog - Section 11: Panelboards') mirrored by distributor US Electrical Services (USESI). OEM original URL https://electrification.us.abb.com/catalog/buylog/GE%20Products%20BuyLog%202019/11_GE%20Products%20BuyLog_Panelboards.pdf returned HTTP/2 INTERNAL_ERROR / 503 from this container. Text extracted to buylog11.txt.

S144 [SRC-00144] GE Industrial Solutions. *GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Parts*. BuyLog p.11-10 Rev. 11/13. 2013-11. Type: oem_catalog. URL: https://assets.usesi.com/product-media/specification-sheets/USESI_49199_specification_sheets.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_49199_specification_sheets.pdf Note: Single-page extract of BuyLog p.11-10 mirrored by USESI; heading reads 'A-Series II Panelboards'.

S145 [SRC-00145] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Breaker Kits*. DEH40150 Rev.No.03. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/rYlgoZ/DEH40150rev03.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40150rev03.pdf Note: Distributor mirror (Carbon Controls). Original yodify mirror links now 404.

S146 [SRC-00146] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Breaker Kits*. DEH40151 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/vYA1QZ/DEH40151.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40151.pdf

S147 [SRC-00147] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Breaker Kits*. DEH40152 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/BnbG3Z/DEH40152.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40152.pdf Note: Same file also mirrored at https://cdn.lsicloud.net/kendall/Resources/AD/GE_ASPP6QD6D_Manual.pdf

S148 [SRC-00148] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit Breaker Kits*. DEH40153 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/lYWwVZ/DEH40153.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40153.pdf

S149 [SRC-00149] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (12-pole)*. DEH40154 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/LeQrBZ/DEH40154.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40154.pdf

S150 [SRC-00150] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (12-pole)*. DEH40155 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/YjVDgZ/DEH40155.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40155.pdf

S151 [SRC-00151] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Breaker Kits*. DEH40156 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/KOrvrZ/DEH40156.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40156.pdf Note: Also rendered as text at https://www.manualsdir.com/manuals/295079/ge-industrial-solutions-a-series-ii-panelboards-fb.html

S152 [SRC-00152] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (6-pole)*. DEH40157 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/AelGOZ/DEH40157.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40157.pdf

S153 [SRC-00153] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (6-pole)*. DEH40158 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/mDAggZ/DEH40158.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40158.pdf

S154 [SRC-00154] GE Industrial Systems. *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD)*. DEH065 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295540/ge-industrial-solutions-spectra-series-power-panelboards-amcb4qd-and-amcb6qd.html (accessed 2026-10-21) Note: Text rendering on manualsdir.com (4 pages); footer 'DEH065 R02 0901 (c) 2001 General Electric Company'. Table 1 quantities not captured in the text rendering.

S155 [SRC-00155] GE Industrial Systems. *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM)*. GEH5674 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294735/ge-industrial-solutions-spectra-series-power-panelboards-amc2gm-and-amc3gm.html (accessed 2026-10-21) Local copy: docs/library/GEA/294735.txt Note: Footer 'GEH5674 R03 0701'.

S156 [SRC-00156] GE Industrial Systems. *Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL*. DEH40392 R01. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295049/ge-industrial-solutions-spectra-series-power-panelboards.html (accessed 2026-10-21) Local copy: docs/library/GEA/295049.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S157 [SRC-00157] GE Industrial Systems. *Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S*. DEH212 R02. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294723/ge-industrial-solutions-spectra-series-power-panelboards-aeg47-and-aeg47s.html (accessed 2026-10-21)

S158 [SRC-00158] ABB. *ReliaGear neXT Power Panelboards (brochure)*. 1SXU900191B0201. 2022-01. Type: oem_catalog. URL: https://simplebooklet.com/abbreliagearnextpanelboards?textonly=1 (accessed 2026-10-21) Note: Read via simplebooklet text-only rendering; no kit catalog numbers present.

S159 [SRC-00159] Relectric. *NHB150PK General Electric / GE Mounting Hardware (product page)*. Type: surplus. URL: https://www.relectric.com/nhb150pk (accessed 2026-10-21)

S160 [SRC-00160] SuperBreakers. *General Electric NHB150PK Twin Mount Mounting Hardware (product page)*. Type: surplus. URL: https://www.superbreakers.com/collections/mounting-kits-panels-accessories/products/general-electric-nhb150pk-mounting-hardware (accessed 2026-10-21) Note: Content seen only via search-engine summary; page not fetched directly.

S161 [SRC-00161] ABB. *BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (obsoleted)' bolt-on mounting hardware)*. Type: oem_catalog. URL: https://electrification.us.abb.com/catalog/buylog/11_BuyLog_Panelboards.pdf (accessed 2026-10-21) Status: blocked. Note: curl: empty reply; WebFetch: HTTP 503. Contents known only from search-engine summary (TOC mentions ReliaGear neXT nomenclature and 'Spectra (obsoleted) bolt-on panelboard mounting hardware'; 'Retrofit kit for Spectra panelboards').

S162 [SRC-00162] manualmachine.com (mirror of GE documents). *GE Industrial Solutions manuals on manualmachine.com (DEH061 AMCB3KM/AMCB2KM; DEH042 cover supports SE/SF/TE/TF/TQ/TEL; GEH5589 APN/APNB interiors; AMCB4GB/AMCB6GB; AMCB2GM/AMCB3GM; A-Series II TQD)*. Type: archive. URL: https://manualmachine.com/ge/amcb3km/12960805-user-manual/ (accessed 2026-10-21) Status: blocked. Note: HTTP 403 to both curl and WebFetch. Existence/titles known only from search results.

S163 [SRC-00163] Stanion Wholesale Electric. *TQ2DPK GE product page*. Type: distributor. URL: https://www.stanion.com/Product/tq2dpkge (accessed 2026-10-21) Status: 404. Note: Description known only from search-engine summary; direct fetch returned 404.

S164 [SRC-00164] Surplus Record. *Surplus Record listings: General Electric AV-Line switchboards (800/1200/1600 A)*. Type: surplus. URL: https://surplusrecord.com/listing/1600-amp-general-electric-av-line-switchboard-480-volts-3ph-4w-10-breaker-power-break-dist-main-1086962/ (accessed 2026-10-21) Note: Seen via search-engine summary only.

S165 [SRC-00165] Siemens Industry, Inc.. *SPEEDFAX Product Catalog - Section 11 Panelboards*. SPEEDFAX Section 11 (last modified 06/24/21). 2021-06. Type: oem_catalog. URL: https://media.distributordatasolutions.com/siemenscomplete/2021q3/documents/4c3c521171b400657d1e4257e047beee1a99295b.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/speedfax_sec11_2021q3.pdf Note: 132 pages. Distributor-hosted (DDS syndication) copy of OEM PDF. Key pages: 11-7 (UPB coding), 11-13/11-14 (Revised P1 kits), 11-15 (Original P1 / S1-S2-SE kits), 11-20..11-23 (spare parts, filler chart), 11-53/11-54 (P2/P3 spare parts), 11-66/11-67 (P3 kits), 11-96 (P4 strap kits), 11-110 (P5 strap kits). Individual pages carry their own 'Revised on' dates (2019-2021).

S166 [SRC-00166] Siemens Canada Limited. *Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/FCII, IPS)*. Power Product Catalogue Section 11. 2025-05. Type: oem_catalog. URL: https://assets.new.siemens.com/siemens/assets/api/uuid:ac958a69-a1ee-45e7-95f6-152fe9153d31/s11-switchboards.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/s11-switchboards.pdf Note: PDF metadata creation 2025-05-30. p.11-5: SB1/SB2/SB3 connection strap kit table; p.11-14: S3VA52PR/S3VA53PR provision kits, nut keeper kits, 6FPB blank plates; p.11-15: CSA SMP/Series 6 strap kits (6BL2C, 6E62, 6F62, 6JJ62, 6M61C, 6N61C etc.).

S167 [SRC-00167] Siemens Energy & Automation. *2005 Electrical Distribution Products price list - Switchboard Replacement and Modification Kits*. Discount Schedule A, page 8-13. 2005. Type: oem_catalog. URL: https://assets.usesi.com/product-media/brochures/USESI_93250_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/USESI_93250_brochure.pdf Note: Single catalog page hosted by distributor (USESI). Strap kits 'for Series 5 or 6 CDP Circuit Breaker Panelboards or FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, and SB3 Switchboards ... for switchboards manufactured since 1974'. Includes list prices (2005).

S168 [SRC-00168] Siemens Power Distribution & Control. *SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22*. SPEEDFAX 2007-2008 pp.10-17..10-22. 2007. Type: oem_catalog. URL: https://www.nooutage.com/pdf/Siemens-PanelboardsP1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/Siemens-PanelboardsP1.pdf Note: Original (pre-revision) P1 pages; lists P1 branch breakers BL/BLH/HBL/BQD/NGB, subfeed QJ2/ED4/FXD6. No kit tables on these pages.

S169 [SRC-00169] Siemens Industry, Inc.. *Type P1 Panelboard data sheet (SIE_CS_P1)*. SIE_CS_P1 / Siemens SIOS 109799956. 2021-10. Type: oem_bulletin. URL: https://cache.industry.siemens.com/dl/files/956/109799956/att_1147894/v1/SIE_CS_P1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_CS_P1.pdf Note: (c) 10.2021. Revised P1 specification + main strap kit list; states 'Revised P1 kits cannot be used with original P1'.

S170 [SRC-00170] Siemens Industry, Inc.. *Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)*. 2021. Type: oem_bulletin. URL: https://michaelsforms.eastus2.cloudapp.azure.com/prod_image/30WD80V.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/30WD80V.pdf Note: Lists P2/P3 branch unit-space strap kits BBKB32, BBKVA4P2P3, BBKQR2, BBKVA5262S (sic; SpeedFax spells BBKVA5262P2S), BBKVA52P3T; strap kit for 1in frame breakers uses 3in unit space.

S171 [SRC-00171] Siemens Industry, Inc.. *New Revised Type P1 Kits and Accessories (flyer; distributor file MBKQR3150HA.pdf)*. c.2015-2019. Type: oem_bulletin. URL: https://michaelsforms.eastus2.cloudapp.azure.com/prod_image/MBKQR3150HA.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/MBKQR3150HA.pdf Note: Earlier (pre-April-2020 neutral update) Revised P1 kit list: MBK..A breaker kits, CNLK30A/42A/54A, LNLK30A/42A/54A, 2NLK..A, 42NLK..A, MBKDFA back-fed label kit, DFFP1.

S172 [SRC-00172] Siemens Canada Limited. *NextGen P1 panelboard brochure (Siemens Canada)*. SI-LP-1633. unknown (c.2020). Type: oem_bulletin. URL: https://assets.new.siemens.com/siemens/assets/api/uuid:f264c377-e970-40b2-b60d-155bc2e52f40/ca-si-lv-en-NextGen-P1-brochure-SI-LP-1633.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/NextGen-P1-brochure-SI-LP-1633.pdf Note: Canadian Revised P1 kit table; references MBKBFA back-fed main label kit and Canadian kit numbers (e.g. MBKQR12225A, MBKFD33250A, MBKJD33400A).

S173 [SRC-00173] Siemens. *Data sheet US2:MBKBFA - KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER*. US2:MBKBFA. 2021-01-06. Type: oem_web. URL: https://res.cloudinary.com/wholesale-plumbing/image/upload/Documents2/Siemens_MBKBFA_Specification_Sheet.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/Siemens_MBKBFA_Specification_Sheet.pdf Note: Minimal data sheet (title + 'Field installable kit').

S174 [SRC-00174] Siemens Industry, Inc.. *Panelboards Selection and Application Guide*. SIE Selection And Application Guide Panelboards (SIOS 109792056). 2016. Type: oem_catalog. URL: https://cache.industry.siemens.com/dl/files/056/109792056/att_1049678/v1/SIE_Selection_And_Application_Guide_Panelboards.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_Selection_And_Application_Guide_Panelboards.pdf Note: (c) 2016. Only cross-checked by part-number grep in this batch (BBKB32, BBKED32, BBKNB32, BBKQR1, BBKQR2, BBKQRP1FK, BBKQRP2FK, DFFP3, DFFP6, LNLK30A/42A/54A, SEB kits, SF6/SF6D, SJ1/SJ1D, SE6/SE6D, SQR/SQRC/SQRD, 6FPB01..10). Not fully mined.

S175 [SRC-00175] Lumen. *Lumen (Canada) product listing - Siemens 6BL2C switchboards breaker mounting kit copper 3 ph 240 V 100 A*. Type: distributor. URL: https://lumen.ca/en/products/20-power-distribution/08-panelboards/01-main-breaker-kits/p-U0lFNkJMMkM=-sie6bl2c-siemens-6bl2c-switchboards-breaker-mounting-kit-copper-3-ph-240-v-100-a (accessed 2026-10-21) Note: Seen via search summary only; breaker list varies between distributors (BL/BLH/HBL/BQD/BQD6 vs BQ/BQH/HB).

S176 [SRC-00176] various. *Distributor listings for Siemens SBL (sydist.com SIEM-SBL-50631; superbreakers.com/products/sbl; steinerelectric 'BL BKR MTG KIT FOR P4/S4/SPP PNLBD')*. Type: distributor. URL: https://www.sydist.com/Product/SIEM-SBL-50631 (accessed 2026-10-21) Note: Search-summary only. Distributor descriptions are inconsistent (one wrongly calls it a padlock kit / QR frame); SpeedFax p.11-96 is authoritative.

S177 [SRC-00177] Crescent Electric Supply. *Crescent Electric listing - QF3 Load Center Filler Plate (sub no. 12-1800-01), for QP/BQ/ED2/EQL/SEQ/EQG*. Type: distributor. URL: https://crescentelectric.com/product/47056/qpbqed2-filler-plate-sub-no-12-1800-01 (accessed 2026-10-21) Note: Search-summary only.

S178 [SRC-00178] Mike Holt Enterprises forum. *Mike Holt forum thread - Gould panels and switchboards*. Type: forum. URL: https://forums.mikeholt.com/goto/post?id=1425085 (accessed 2026-10-21) Note: Anecdotal: ITE/Gould lineage, Bulldog Pushmatic not supported by Siemens.

S179 [SRC-00179] Franklin Empire. *Franklin Empire listing - Siemens 6F62 Connecting Strap Kit, For Use With SPP/FPP/S5/F2 Panelboards, 600 VAC, 70 to 250 A, Copper, 5 in H*. Type: distributor. URL: https://franklinempire.com/en/6f62-4114-6f62.html (accessed 2026-10-21) Note: Search-summary only.

S180 [SRC-00180] Schneider Electric / Square D. *PowerPact H-, J-, and L-Frame Circuit Breakers Catalog*. 0611CT1001 R01/13. 2013-01. Type: oem_catalog. URL: https://docs.rs-online.com/c13a/0900766b813b5fa7.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/0611CT1001_R01-13_rs-mirror.pdf Note: Distributor-hosted (RS Components) copy of OEM catalog. Section 9 'Circuit Breaker Mounting and Connections' pp.117-129: Tables 118-130 (rear connections, mechanical lug kits, control wire terminals, terminal nuts, PDCs, compression lugs, terminal shields). Superseded by 0611CT1001 v5.0 (2024-09-30) which could not be downloaded (se.com 403).

S181 [SRC-00181] Schneider Electric. *Product data sheet AL175JD - Circuit breaker accessory, PowerPacT J, lug kit, mechanical, 150A to 175A, aluminum, qty 3*. AL175JD data sheet. unknown. Type: oem_web. URL: https://docs.rs-online.com/4ce1/A700000013719674.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/rs_A700000013719674.pdf Note: Distributor-hosted copy of Schneider product data sheet.

S182 [SRC-00182] Schneider Electric / Square D. *Square D Digest Section 3 - Molded Case Circuit Breakers and Enclosures (2012)*. Digest 176 Section 3 (Class 612). 2012. Type: oem_catalog. URL: https://www.farnell.com/datasheets/1883762.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/farnell_1883762_SquareD_Digest_Sec3_2012.pdf Note: Farnell-hosted copy. Table 3.61/3.62 (control wire terminations, tapped PowerPact lugs) p.3-17; Table 3.71 termination clip p.3-20; Table 3.88 mechanical lug kits, 3.89 D-frame lugs, 3.90 terminal shields p.3-28; Table 3.91 compression lugs, 3.92/3.93 PDC p.3-29. Digest edition number inferred from 2012 copyright (not printed in extracted text).

S183 [SRC-00183] Schneider Electric / Square D. *Square D Digest Section 3 - Molded Case Circuit Breakers and Enclosures (2016)*. Digest Section 3 (Class 612, ref. catalog 0612CT0101). 2016-09-24. Type: oem_catalog. URL: https://cdn.lsicloud.net/kendall/Resources/AD/Square_D_FA24020AB_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/Square_D_FA24020AB_Catalog.pdf Note: Kendall Electric-hosted copy. Table 3.44/3.45 p.3-14; Table 3.69 p.3-25; Table 3.70 mechanical lug kits p.3-26; Table 3.71 compression lugs and 3.72 PDC p.3-27.

S184 [SRC-00184] Eaton (Cutler-Hammer). *Molded Case Circuit Breakers (Tab 12) - Consulting Application Guide / catalog, November 2008*. CA08101001E. 2008-11. Type: oem_catalog. URL: https://files.kempstoncontrols.com/files/13de8777fba90a2d4f0dd1d8944292ca/JT3225FA.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/JT3225FA.pdf Note: Kempston Controls-hosted copy of full Eaton Tab 12 (pp.12-1..). Terminal tables: EG 12-19, JG 12-28, LG 12-37, NG 12-48, F 12-91, J 12-97, K 12-113, L 12-132, M 12-140, N 12-162, R 12-181; External accessories 12-243..12-261 (end caps, keeper nuts, plug nut, control wire kits, multiwire, terminal shields, end covers, interphase barriers, rear connecting studs, panelboard straps).

S185 [SRC-00185] Eaton (Cutler-Hammer). *Series C Molded Case Circuit Breakers 70-250 Amperes J-Frame (pp.12-87..12-92), May 2008*. CA08101001E. 2008-05. Type: oem_catalog. URL: https://rexel-cdn.com/products/eaton-distribution-breakers-moldedcase-j-frame.pdf?i=46AAC28F-3990-44C5-A4CE-75139B8D2493 (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-distribution-breakers-moldedcase-j-frame.pdf Note: Rexel-hosted excerpt. Table 12-163 J-frame line/load terminals p.12-91.

S186 [SRC-00186] Eaton. *Volume 4 - Circuit Protection, Tab 2 Molded Case Circuit Breakers (excerpt pages V4-T2-188, 190, 203, 334, 345, 354, 356), October 2015*. CA08100005E. 2015-10. Type: oem_catalog. URL: https://cdn.lsicloud.net/warshauers/Resources/EATCORE00136_V4T2_188_V4T2_190_V4T2_203_V4T2_334_V4T2_345_V4T2_354_V4T2_356.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/EATCORE00136_V4T2_188_V4T2_190_V4T2_203_V4T2_334_V4T2_345_V4T2_354_V4T2_356.pdf Note: Warshauer Electric-hosted excerpt. V4-T2-203 L-frame terminal table; V4-T2-334 definite purpose terminals; V4-T2-345 Series G enclosed terminals; V4-T2-356 DC breaker terminal wire ranges table.

S187 [SRC-00187] Eaton. *Volume 4 - Circuit Protection, Series G EG-Frame pages V4-T2-16..V4-T2-27, April 2014*. CA08100005E. 2014-04. Type: oem_catalog. URL: https://www.cmafh.com/images/Master%20PDFs/Eaton/Eaton%20MCCB/Eaton%20MCCB%20EG-Frame.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Eaton_MCCB_EG-Frame.pdf Note: CMA/Flodyne-hosted excerpt. EG terminals V4-T2-23/24; control wire kit, interphase barriers, end covers, multiwire, terminal shields V4-T2-25.

S188 [SRC-00188] Eaton (Cutler-Hammer). *Series C Molded Case Circuit Breakers 70-400 Amperes K-Frame p.12-98 (May 2008) - Types KD, HKD, KDC electronic*. CA08101001E (excerpt). 2008-05. Type: oem_catalog. URL: https://assets.usesi.com/product-media/brochures/USESI_563623_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_563623_brochure.pdf Note: USESI-hosted single page; shows standard terminals per K-frame electronic rating plug (TA300K, TA350K, 3TA400K).

S189 [SRC-00189] Eaton. *Eaton product specifications 3TA150FB*. 3TA150FB spec sheet. unknown. Type: oem_web. URL: https://www.elliottelectric.com/Media/3TA150FB-ETN-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/3TA150FB-ETN-1021-3-Attachment.pdf Note: Elliott Electric-hosted auto-generated Eaton spec sheet. Taxonomy field 'Frame J-K' appears to be a generic web-taxonomy value (contradicts catalog); treat frame field with caution.

S190 [SRC-00190] Eaton. *Eaton Series G molded case circuit breaker accessories and terminals - 3TA632LK (pe.eaton.com spec)*. ID-SPE-v2-3TA632LK. unknown. Type: oem_web. URL: https://www.ideadigitalcontent.com/files/10964/ID-SPE-v2-3TA632LK.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/ID-SPE-v2-3TA632LK.pdf

S191 [SRC-00191] KM Parts (klocknermoeller.com). *Eaton Series-C Molded Case Circuit Breakers External Accessories (KM Parts web page)*. unknown. Type: distributor. URL: https://klocknermoeller.com/sc-externalaccessories-2/ (accessed 2026-10-21) Note: Reseller page reproducing a newer Eaton catalog's external-accessory tables; some values differ from 2008 OEM catalog (interphase barrier numbering, J-frame shield location).

S192 [SRC-00192] KM Parts (klocknermoeller.com). *Eaton Series-C F/K/L/M/N/R-frame pages (KM Parts web pages sc-f, sc-k, sc-m, sc-n, sc-r)*. unknown. Type: distributor. URL: https://klocknermoeller.com/sc-k/ (accessed 2026-10-21) Note: Reproduces Eaton terminal tables (newer edition than 2008). Also https://klocknermoeller.com/sc-f/, /sc-m/, /sc-n/, /sc-r/.

S193 [SRC-00193] Schneider Electric. *Can the AL400L61K3 lug be installed on the 400 amp or 600 amp Powerpact L frame breaker? (FAQ FA221892)*. FA221892. unknown. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA221892/ (accessed 2026-10-21) Status: blocked. Note: Direct fetch blocked (se.com 403); content known only from web-search snippet: lug accepts (1) #2 AWG-500 kcmil Al or (1) #2 AWG-600 kcmil Cu, 3 lugs per kit, may be used as optional lug on 400/600 A L-frame subject to wire size/rating limits.

S194 [SRC-00194] Schneider Electric. *Mechanical Lug Kits Installation Instructions (AL150HD, AL150HDS, CU150HD, AL175JD, AL250JD, CU250JD)*. 48940-221-02 (v05, 2019-12). 2019-12. Type: oem_instruction. URL: https://www.schneider-electric.us/en/download/document/48940-221-02/ (accessed 2026-10-21) Status: blocked. Note: Download returned 403; existence and part list known from search snippet only.

S195 [SRC-00195] Eaton. *Volume 4 - Circuit Protection, Tab 2 Molded Case Circuit Breakers (current)*. CA08100005E. 2026-04. Type: oem_catalog. URL: https://www.eaton.com/content/dam/eaton/products/electrical-circuit-protection/molded-case-circuit-breakers/mccb-catalog-v4-t2-ca08100005e.pdf (accessed 2026-10-21) Status: blocked. Note: eaton.com returns empty reply/503 from this container (curl and WebFetch).

S196 [SRC-00196] various distributors. *Distributor listings AL800M23K / AL800P7K (Steiner Electric, Stoneway, Lakeland)*. unknown. Type: distributor. URL: https://steinerelectric.com/Product/Square-D-AL800M23K-Mechanical-Lug-KitFor-Use-With-PowerPact-M-and-P-Frame-800-A-Circuit-Breaker-390767 (accessed 2026-10-21) Note: Seen via web-search result summaries only; also https://www.stoneway.com/product/206142/Shared.ContactForPricing.ContactLink (AL800P7K).

S197 [SRC-00197] various distributors. *Distributor listings AL250KA (Stanion, Steiner, Stoneway)*. unknown. Type: distributor. URL: https://www.stanion.com/Product/al250kasqd (accessed 2026-10-21) Note: Seen via web-search result summaries; listings state use with KA, KH, KI, KC frames, 4 AWG-350 kcmil.

S198 [SRC-00198] ABB (GE Industrial Solutions). *GE Products BuyLog, Section 6: Molded Case Circuit Breakers*. BuyLog Section 6, Rev. 1/19. 2019-01. Type: oem_catalog. URL: https://assets.unilogcorp.com/2/ITEM/DOC/GE_SEFFMI_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/GE_SEFFMI_Catalog.pdf Note: Distributor-hosted mirror of the OEM PDF, 106 pp. Key pages: 6-36/6-37 (TJJ/TJK lugs), 6-48 (SG600 lugs), 6-73/6-78/6-81/6-88 (Record Plus lugs), 6-101 (mounting hardware and studs), 6-102 (lugs, line shields, lug covers), 6-103 (Spectra lugs and covers), 6-104 (power distribution lugs). CAUTION: footnote superscripts are run into the part numbers in the extracted text (e.g. 'TCAL1212' = TCAL121 + footnote 2), so numbers were reconciled against the 2012 edition.

S199 [SRC-00199] GE Industrial Solutions. *GE BuyLog Catalog, Section 6: Molded Case Circuit Breakers*. BuyLog Section 6, Rev. 11/13. 2013-11. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_107433_catalog_1.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_107433_catalog_1.pdf Note: Distributor mirror. Its lug tables carry the same part numbers as the Rev. 1/19 edition.

S200 [SRC-00200] GE Industrial Solutions. *GE BuyLog Catalog, Section 3: Molded Case Circuit Breakers (with GO-135 list prices)*. BuyLog Section 3, Rev. 9/12. 2012-09. Type: oem_catalog. URL: https://www.usesi.com/media/product-media/catalogs/USESI_14306_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_14306_catalog.pdf Note: Key pages: 3-120 (lugs and associated hardware, with footnotes 1-10), 3-121 (Spectra lugs), the TKMA tables (TCAL81/TCAL121) and the TJJ/TJK tables. Footnote numbers here differ from the 2019 edition, which made it possible to separate base part numbers from footnote digits. Lists the TCAL27, TCALK341, TCALK343, TCALK347 and TJLVK items that the 2013/2019 tables drop.

S201 [SRC-00201] GE Consumer & Industrial. *GE 2008 BuyLog, Section 3: Molded Case Circuit Breakers (excerpt, 3 pp.)*. BuyLog Section 3, Rev. 1/08. 2008-01. Type: oem_catalog. URL: https://docs.ips.us/docs/W1003579.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/W1003579.pdf Note: Excerpt hosted by IPS. Mentions only TCAL81 and TCAL125. Used for corroboration.

S202 [SRC-00202] GE Industrial Solutions. *GE BuyLog Section 6 single page 6-103 (lugs), Rev. 7/13*. BuyLog p. 6-103 Rev. 7/13. 2013-07. Type: oem_catalog. URL: https://cdn.shopify.com/s/files/1/0074/7149/7286/files/TCAL12_Catalogue.pdf?v=1680355092 (accessed 2026-10-21) Local copy: docs/library/GEA/TCAL12_Catalogue.pdf Note: Single-page extract (2013 pagination) of the general lug table hosted by a reseller. Its content matches 2019 p. 6-102.

S203 [SRC-00203] Siemens Industry, Inc.. *Siemens SPEEDFAX Product Catalog, Section 7: Molded Case Circuit Breakers*. SF-17-Sect-07 (SPEEDFAX 2017, pages revised 2017-2020). 2020-09. Type: oem_catalog. URL: http://library.coburns.com/specs/SF-17-Sect-07-ALL-web.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SF-17-Sect-07-ALL-web.pdf Note: 240 pp. Mirror (Coburn's). The OEM URL https://support.industry.siemens.com/cs/attachments/109983309/SF-17-Sect-07-ALL-web.pdf returned a 470-byte HTML stub to curl. Key pages: 7-39 (BQXD lugs, finger-safe shields), 7-40 (QR2 lugs), ED/FD/JD/LD/MD/ND/PD pages (lug notes), 7-153 (mechanical lugs, rev 06/30/19), 7-154 (aluminum body lugs, rev 05/31/18), 7-155 (optional Cu lugs, compression and distribution lugs, rev 11/30/19), 7-160 (terminal shields, rev 02/28/19), 7-165 (plug-in and rear-connecting studs, rev 09/30/20).

S204 [SRC-00204] Siemens Industry, Inc.. *Siemens SPEEDFAX, Section 7: Molded Case Circuit Breakers (section last modified 08/17/21)*. SPEEDFAX Section 7 (2021 revision). 2021-08. Type: oem_catalog. URL: https://docs.ips.us/docs/W1003585.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/W1003585.pdf Note: 242 pp. Later revision. Its set of TA/TC lug catalog numbers is identical to s6, so it was used only for corroboration and to show the parts were still listed in 2021.

S205 [SRC-00205] BSP Automation (distributor). *Siemens TA1Q300 product page*. Type: distributor. URL: https://bspautomation.com/brand/siemens/ta1q300 (accessed 2026-10-21) Note: Describes TA1Q300 as a 3-lug kit for QJ breakers, Al/Cu, single wire up to 300 kcmil. A search snippet from superbreakers.com (HTTP 429 when fetched) lists QJ2, QJH2, QJ2H and HQJ2H, 60-225 A.

S206 [SRC-00206] Breaker King (distributor). *Breaker Mounting Kits :: Federal Pacific Electric (category listing)*. Type: distributor. URL: https://www.breakerking.com/catalog/index.php?main_page=index&cPath=4_187_189 (accessed 2026-10-21) Note: Aftermarket FPE bus-connection kits with explicit 'replaces OEM K?DP?C' cross references (NEF1K/NEJ1K/NFJ1K/NJL1K/NEF3K/NEJ3K/NJL3K).

S207 [SRC-00207] Breaker King (distributor). *Federal Pacific CDP [BCDPNJLFPE] product page*. Type: distributor. URL: https://www.breakerking.com/catalog/index.php?main_page=product_info&products_id=1938 (accessed 2026-10-21) Note: Kit contents statement: screws, brackets, deadfront cover plate, instructions; ship wt 7 lb.

S208 [SRC-00208] R&D Electric / relectric.com (surplus/recertifier). *Federal Pacific Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/federal-pacific-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: 49 FPE accessory part numbers incl. KCDP-1C..5C, KBDP-1C..4C, KFDP-*, KQB-*, NDPNE/NDPNEJ, NAIB-NEF, NM lugs NM34/NM36/NM38, N32.

S209 [SRC-00209] Superbreakers (distributor/recertifier). *Superbreakers Federal Pacific collection (Shopify products.json, 639 items)*. Type: distributor. URL: https://superbreakers.com/collections/federal-pacific (accessed 2026-10-21) Note: Machine-read via /collections/federal-pacific/products.json?limit=250&page=1..3. Descriptions are partly marketing copy; ratings treated as max conf C.

S210 [SRC-00210] Electrical Power and Control (surplus). *Federal Pacific KCDP-1A Kit (for NH/NA-Type Panel, NE/NEF Frame)*. Type: surplus. URL: https://electricalpowerandcontrol.com/product/federal-pacific-kcdp-1a-kit-for-nh-na-type-panel-ne-nef-frame (accessed 2026-10-21) Note: Used kit; label text 'For NH1B/NA1B Type Panels', '(2) 3 Pole Breakers', 'J25 (HM1)', 'LA25037'.

S211 [SRC-00211] R&D Electric / relectric.com. *NDPNEJ mounting hardware strap kit detail*. Type: surplus. URL: https://www.relectric.com/ndpnej (accessed 2026-10-21)

S212 [SRC-00212] Federal Pacific Equipment / Circuit Breaker Sales (fpeparts.com). *Federal Pacific Electric panelboard connector kits*. Type: oem_web. URL: https://fpeparts.com/pages/fpe-panelboard.html (accessed 2026-10-21) Note: Successor-to-tooling site; lists kit families FDP, QMQB, NDP, NHDP, NAIB, NHIB, LDP, CDP, BDP (names only, no part numbers). States no residential Stab-Lok parts.

S213 [SRC-00213] Federal Pacific Equipment / Circuit Breaker Sales (fpeparts.com). *About Federal Pacific Electric Equipment (history)*. Type: oem_web. URL: https://fpeparts.com/pages/history.html (accessed 2026-10-21)

S214 [SRC-00214] Wikipedia. *Federal Pacific Electric Corporation*. Type: other. URL: https://en.wikipedia.org/wiki/Federal_Pacific_Electric_Corporation (accessed 2026-10-21) Note: Cites 406 F.3d 577 and InspectApedia for 1986 split (ACBC breakers / Electro-Mechanical Corp non-breaker), 1993 ACBC->Schneider contract manufacture.

S215 [SRC-00215] Superbreakers. *Federal Pacific panelboard/kits: KBDP1C, KCDP1C, KFDP4C product pages*. Type: distributor. URL: https://superbreakers.com/products/federal-pacific-kbdp1c-mounting-hardware (accessed 2026-10-21) Note: Individual product JSON read for KCDP1C, KBDP1C, KFDP4C.

S216 [SRC-00216] Mike Holt Forums. *Retrofit kit for Federal Pacific (forum thread)*. Type: forum. URL: https://forums.mikeholt.com/threads/retrofit-kit-for-federal-pacific.53588/post-867625 (accessed 2026-10-21) Note: Read via search summary only (site returns 403 to fetch). Eaton/Square D custom retrofit interiors for existing FPE enclosures.

S217 [SRC-00217] Schneider Electric. *Schneider Electric FAQ: replacement breakers for Federal Pacific switchboards/panelboards; NBLP panelboards take NB type breakers*. Type: oem_web. URL: https://www.se.com/nl/en/faqs/FAQ000278110/ (accessed 2026-10-21) Status: blocked. Note: 403 to fetch; content known only from search-result snippet: 'Schneider Electric does no longer offer replacement breakers for Federal pacific switchboard, panelboards' and 'The NBLP panelboards take NB type breakers'.

S218 [SRC-00218] Schneider Electric Canada. *Federal Pioneer / Schneider Canada FAQ FA234570*. Type: oem_web. URL: https://se.com/ca/en/faqs/FA234570/ (accessed 2026-10-21) Status: blocked.

S219 [SRC-00219] Wikipedia. *Zinsco*. Type: other. URL: https://en.wikipedia.org/wiki/Zinsco (accessed 2026-10-21) Note: History Frank Adam->Zinsmeyer->Zinsco (1943)->GTE-Sylvania (1973)->Challenger (1978/1981)->Westinghouse (1994 per article)->T&B molds; Connecticut Electric bus kits. Cites InterNACHI forum 2007.

S220 [SRC-00220] InspectAPedia. *GTE Sylvania Zinsco breaker & panel identification*. Type: other. URL: https://inspectapedia.com/electric/GTE_Sylvania_Zinsco.htm (accessed 2026-10-21) Note: Reader-submitted panel labels: ML12(12-24)C, MLB20(..)C, MOB20(20-40)C, MT12MBB, MTMB20(20-40)F/S, 390-205-09; breaker types Q, QC, QCN, Q24, R38, RC38, HRGF, QFP; main lug blocks LK-15 (150A), LK-22 (225A).

S221 [SRC-00221] Superbreakers. *Superbreakers Zinsco + Sylvania collections (Shopify products.json)*. Type: distributor. URL: https://superbreakers.com/collections/zinsco (accessed 2026-10-21) Note: 95 Zinsco + 48 Sylvania items; QSF fusible panelboard switches, QFP/QFL/QFB/QFBL mains, QB/QCB bolt-on, UBIZ cross refs.

S222 [SRC-00222] The Home Depot (retailer). *Zinsco 125-Amp Type RBK UBI Replacement Buss Bar Kit for Zinsco Load Centers UBIZRBK12*. Type: distributor. URL: https://www.homedepot.com/p/Zinsco-125-Amp-Type-RBK-UBI-Replacement-Buss-Bar-Kit-for-Zinsco-Load-Centers-UBIZRBK12/100669974 (accessed 2026-10-21) Note: Read via search summary: '2 copper-plated buss bars, lugs, screws, insulators included'.

S223 [SRC-00223] Dale Electric / Sonic Electric / Ace Hardware (retailers). *Connecticut Electric UBIZ / UBIF / UBIP replacement breaker listings*. Type: distributor. URL: https://dale-electric.com/products/UBIZ30 (accessed 2026-10-21) Note: UBIZ (Zinsco Q-type), UBIF (FPE Stab-Lok NA/NC), UBIP (Pushmatic/Bulldog) 10kAIC ETL-listed replacement breakers; read via search summaries.

S224 [SRC-00224] Mike Holt Forums / InterNACHI forum. *Challenger / GTE / Zinsco ownership discussion*. Type: forum. URL: https://forums.mikeholt.com/threads/challenger-brand-history.55618/post-924498 (accessed 2026-10-21) Note: Via search summary: Westinghouse acquired Challenger late 1980s (NACHI timeline says 1988); T&B took Zinsco/Challenger breaker lines.

S225 [SRC-00225] InspectAPedia. *Frank Adam Electrical Panels*. Type: other. URL: https://inspectapedia.com/electric/Frank-Adam-Electrical-Panels.php (accessed 2026-10-21) Note: Model labels PULFUZSW, KLAMPSWFUZ; Zinsco-type QSF breakers/switches in some Frank Adam panelboards; Fuselok switch; era c.1900-1950 (to 1970).

S226 [SRC-00226] Mike Holt Forums / InterNACHI / ECN forums. *Trumbull Electric panel / GE-Trumbull discussions*. Type: forum. URL: https://forum.nachi.org/t/trumbull-electric-panel/39581 (accessed 2026-10-21) Note: Label 'Trumbull Electric Mfg. Co. Plainville Conn. USA. A General Electric Organization'; GE/Trumbull breaker numbers same.

S227 [SRC-00227] Mike Holt Forums. *Bulldog Pushmatic forum threads (3-phase Pushmatic, ITE/Siemens lineage)*. Type: forum. URL: https://forums.mikeholt.com/threads/bulldog-pushmatic.2562559/post-2688682 (accessed 2026-10-21)

S228 [SRC-00228] JRL Electric Supply (dealer blog). *What is a Federal Pacific NE and NEF Circuit Breaker?*. Type: distributor. URL: https://jrlelectricsupplyinc.com/?p=12855 (accessed 2026-10-21) Note: Fetch returned 429; content from search summary: NE and NEF obsolete, same dimensions, fit same panels; NEF 2-3P rated 480 VAC / 250 VDC; voltage and AIC differ.

S229 [SRC-00229] Superbreakers. *Superbreakers Murray + Wadsworth collections (products.json)*. Type: distributor. URL: https://superbreakers.com/collections/murray (accessed 2026-10-21)

S230 [SRC-00230] Eaton Electrical / Cutler-Hammer (mirror hosted by InspectAPedia on its FPE pages). *Eaton Electrical Launches New Options for Upgrading Existing Panelboards - Retrofit Kits (Type CH and BR) selection guide*. Type: oem_catalog. URL: https://inspectapedia.com/fpe/CHRetrofitGuide.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/CHRetrofitGuide.pdf Note: 10 pp. Undated (Eaton Electrical/Cutler-Hammer branding suggests c.2004-2008). Selection charts 1-11 give ~60 retrofit kit catalog numbers by box height, wire size, circuits, main type. Lincoln Flex Center 800-330-6479. Interiors 'UL recognized under UL67'. Mirror URL; original Eaton URL not known.

S231 [SRC-00231] Mike Holt Forums. *Eaton's retrofit panel assemblies are not UL listed (forum thread) and related threads*. Type: forum. URL: https://forums.mikeholt.com/threads/eaton%E2%80%99s-retrofit-panel-assemblies-are-not-ul-listed.122367/ (accessed 2026-10-21) Note: Via search summary: components listed but installed assembly in existing enclosure not; UL paths = interior listed for enclosure or field evaluation; claim that interiors not marked for the existing enclosure revert to 10 kA SCCR (unverified).

S232 [SRC-00232] R&D Electric / relectric.com. *Zinsco Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/zinsco-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: 12 items: DSLNEJT, DSLNET, DSLNFT, DSLNJT, DSLNM, DSLNMS, DSLQB, DSLQFB, QSF100DS, QSF200DS, QSF400DS, QSF600DS.

S233 [SRC-00233] R&D Electric / relectric.com. *Sylvania Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/sylvania-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: 10 items: SEHT, SECT, SJD4T, SKM8S, FPENEFT, QSF100SS, QSF100SB, QSF200SB, QSF400SB, QSF400DS.

S234 [SRC-00234] R&D Electric / relectric.com. *Challenger Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/challenger-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: 41 items: C?D?K twin/single mounting kits (CCA4K, CED3K, CED4K, CED4BK, CFD3K, CFD4K, CFD4BK, CJD4K, CJDS4K, CJDS4BK, CKD4K, CKDS4K, CKDS4BK, CLD4K, CLDS4BK, CMD4K, CND4K), KPRL4C*/KPRL4AC*/KPRL4BC*/KPRL3CF3 kits, CKT trip units, rating plugs. 'PM4a'/'PM4b' annotations.

S235 [SRC-00235] Electrical Power and Control (surplus). *Zinsco QFP2T Main Breaker Panelboard Mounting Hardware / Feet*. Type: surplus. URL: https://electricalpowerandcontrol.com/product/zinsco-qfp2t-main-breaker-panelboard-mounting-hardware-feet (accessed 2026-10-21)

S236 [SRC-00236] R&D Electric / relectric.com. *Frank Adams Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/frank-adams-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: Single item CU-NFJ 'FAM; CU-NFJ; Hardware Kit'.

S237 [SRC-00237] IAEI Magazine / UL. *Circuit breakers and old panelboard; will anything work? (UL Question Corner)*. 2010-03. Type: other. URL: https://iaeimagazine.org/2010/march2010/circuit-breakers-and-old-panelboard-will-anything-work/ (accessed 2026-10-21) Note: UL guidance: only classified breakers (DIXF, 15-60 A, 120/240 V, panels <=225 A, <=10 kA) may substitute; otherwise use breakers named on panel marking.

S238 [SRC-00238] InspectAPedia. *Pushmatic / Bulldog design history*. Type: other. URL: https://inspectapedia.com/electric/Pushmatic_Design_History.php (accessed 2026-10-21) Note: Bulldog Electric Products Co. (Detroit); ITE (Gould) purchase stated 1976; Siemens c.1984; US 2,428,320 (1947) Platz panelboard with detachably mounted devices = Pushmatic panel; installed mainly 1950-1970.

S239 [SRC-00239] Mike Holt Forums. *Murray / Crouse-Hinds / Siemens lineage (forum threads)*. Type: forum. URL: https://forums.mikeholt.com/threads/siemens-and-murray-interchangable.46702/post-737356 (accessed 2026-10-21) Note: Via search summary: Murray -> Crouse-Hinds (Cooper) late 1970s -> Siemens (c.1992, restored Murray name) -> Murray brand phase-out c.2019 (unverified).

S240 [SRC-00240] Bay Power / Mike Holt Forums. *Wadsworth breaker listings and forum discussion*. Type: distributor. URL: https://www.baypower.com/wadsworth/circuit-breakers/wadsworth-a360-3-pole-60-amp-molded-case-circuit-breaker (accessed 2026-10-21) Note: Via search summary; Wadsworth A-series (e.g., A360 3P 60A, A320) and B-series (B1515) breakers; Superbreakers Wadsworth collection SKUs A15NI..A260NI, B1530NI, B3020NI.

S241 [SRC-00241] Mike Holt Forums. *Kinney Panel (forum thread)*. Type: forum. URL: https://forums.mikeholt.com/threads/kinney-panel.104222/post-1650904 (accessed 2026-10-21) Note: Via search summary: Kinney 'still in Elgin, IL'; Eaton vintage products group may support breakers.

S242 [SRC-00242] Midwest Switchgear Group (surplus). *Midwest Switchgear: Zinsco/Sylvania QSF fusible panelboard switch listings (QSFT1033B, QSF-4033)*. Type: surplus. URL: https://www.swgr.com/store/Fusible-Panelboard-Switch/product/QSFT1033B,27-6809.aspx (accessed 2026-10-21) Note: Via search summary.

S243 [SRC-00243] R&D Electric / relectric.com. *Breaker parts & accessories: Mounting Hardware (listing page 12)*. Type: surplus. URL: https://www.relectric.com/circuit-breaker-parts-and-accessories/mounting-hardware?page=12 (accessed 2026-10-21) Note: Shows CMD4K (Challenger single 800 A 600 V, $568.70), SKM8S (Sylvania 800 A single kit), QSF100DS, QSF200SB, KQB-4C.

S244 [SRC-00244] InspectAPedia. *Pushmatic - Bulldog panels & breakers*. Type: other. URL: https://inspectapedia.com/electric/Pushmatic.php (accessed 2026-10-21) Note: P1515 condensed-space dual 15 A will not fit older Gould ITE Pushmatic panels; 3-phase Pushmatic version reported (Rossi); Electri-Center name; Bulldog Electric Products Co., Detroit; US 1,982,289 (1934).

S245 [SRC-00245] Eaton. *Pow-R-Line XD switchboards Instruction Manual MN015002EN (Effective July 2019)*. MN015002EN. 2019-07. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/switchboards/pow-r-line-xd-switchboards-instruction-manual-mn015002en.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/pow-r-line-xd-switchboards-instruction-manual-mn015002en.pdf Note: Downloaded via Eaton-owned mirror host cooperindustries.com (same DAM path).

S246 [SRC-00246] Eaton (Cutler-Hammer, Eaton Canada). *Instruction Manual Pow-R-Line Retrofit Panelboards, P1R & P2R Retrofit Panels (IL01417001E, Effective November 2007)*. IL01417001E. 2007-11. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/pow-r-line-1r-and-2r-retrofit-panels-instruction-manual.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/pow-r-line-1r-and-2r-retrofit-panels-instruction-manual.pdf Note: 14 pp. Downloaded via cooperindustries.com mirror. Also mirrored at https://www.texasinspector.com/files/EatonRetrofitPanels.pdf

S247 [SRC-00247] Eaton (Eaton Canada). *Instruction Manual PUB50895 Pow-R-Line Retrofit Panelboards P1R 240Vac Max & P2R 347/600Vac Max (Effective May 2016, Rev.004)*. PUB50895. 2016-05. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/canada/eaton-pow-r-line-retrofit-panelboards-instruction-manual-pub50895-ca.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-pow-r-line-retrofit-panelboards-instruction-manual-pub50895-ca.pdf Note: 15 pp. Downloaded via cooperindustries.com mirror.

S248 [SRC-00248] Eaton (Cooper Bussmann heritage). *Pow-R-Line 3FQS Fusible Panelboard Instruction Leaflet E3A1071 RevG (December 2010)*. E3A1071 RevG. 2010-12. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/pow-r-line-3fqs-fusible-panelboard-instruction-leaflet-e3a1071.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/pow-r-line-3fqs-fusible-panelboard-instruction-leaflet-e3a1071.pdf Note: 16 pp incl. replacement-parts lists pp.12-14. Downloaded via cooperindustries.com mirror. Product is the former Bussmann Quik-Spec Coordination Panelboard (QSCP).

S249 [SRC-00249] Eaton. *Design Guide DG014001EN Pow-R-Line 1X, 2X and 3X panelboards (Effective November 2024)*. DG014001EN. 2024-11. Type: oem_catalog. URL: https://www.eaton.com/content/dam/eaton/products/design-guides---consultant-audience/eaton-panelboard-prl1x-2x-3x-design-guide-dg014001en.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-panelboard-prl1x-2x-3x-design-guide-dg014001en.pdf Note: Downloaded via cooperindustries.com mirror.

S250 [SRC-00250] Eaton. *Design Guide DG014003EN Pow-R-Line 4X panelboards (Effective March 2025)*. DG014003EN. 2025-03. Type: oem_catalog. URL: https://www.eaton.com/content/dam/eaton/products/design-guides---consultant-audience/eaton-panelboard-prl4x-design-guide-dg014003en.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-panelboard-prl4x-design-guide-dg014003en.pdf Note: Downloaded via cooperindustries.com mirror.

S251 [SRC-00251] Eaton. *Eaton online product catalog SKU pages (https://www.eaton.com/us/en-us/skuPage.<catalog number>.html): General/Product specifications tables*. 2026-10. Type: oem_web. URL: https://www.eaton.com/us/en-us/skuPage.KPRL4FD.html (accessed 2026-10-21) Note: Fetched 2026-10-21 for 334 catalogue part numbers via Eaton-owned mirror host cooperindustries.com/us/en-us/skuPage.<pn>.html; 82 pages exist (KPRL3*, KPRL4*, PRLSEB*, BR kits). All KB*, KL*, KCDP*, KFDP*, 1C966xx/2C11642 branch assemblies returned 404 (no current SKU page). 'Product Length/Depth/Height/Width/Weight' attributes are Eaton logistics data (several are placeholders such as 1x1x1 in or 0.01 in) - treat as package/shipping data, never as component dimensions. Page cited per claim.

S252 [SRC-00252] Eaton (via Elliott Electric). *Eaton product specifications - KPRL3AED3 (Elliott Electric hosted Eaton spec sheet)*. KPRL3AED3 spec sheet. 2024. Type: distributor. URL: https://www.elliottelectric.com/Media/KPRL3AED3-CHD-1021-2-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/KPRL3AED3-CHD-1021-2-Attachment.pdf Note: Eaton-generated product specification PDF (c) 2024 Eaton, distributor hosted.

S253 [SRC-00253] Eaton. *Instruction Leaflet IL014069EN Pow-R-Line 1X/2X/3X Installation reference for tall interiors (Effective February 2024)*. IL014069EN. 2024-02. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/eaton-pow-r-line-1x2x3x-installation-reference-for-tall-interiors-il014069en-en-us.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-pow-r-line-1x2x3x-installation-reference-for-tall-interiors-il014069en-en-us.pdf Note: Downloaded via cooperindustries.com mirror.

S254 [SRC-00254] Siemens Industry, Inc.. *Siemens SPEEDFAX 2017 Product Catalog p. 11-48 'Type P3 Panelboard Kits and Accessories Selection' (revised 05/15/18)*. SPEEDFAX 2017 p. 11-48 (rev 05/15/18). 2018-05. Type: oem_catalog. URL: https://my.goagilix.com/assets/8e/ae/8eae8069-ae72-4c43-884e-ced7a932dac0/IDW_DOCUMENT_0a99b8af4a8d4007e49c8b7c5bf43b3a0181bf98c101e2c9da4d60b95cb45b84.pdf (accessed 2026-10-21) Note: Single catalog page hosted by distributor (goagilix IDW document).

S255 [SRC-00255] Siemens Industry, Inc.. *P1SCRWS Branch Connector Screw Kit Instructions*. 11-A-1072-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1072-01_P1SCRWS.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1072-01_P1SCRWS.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S256 [SRC-00256] Siemens Industry, Inc.. *P1-250 Panelboard Kit CNLK30A, CNLK42A & CNLK54A 250A Copper Neutral Lug Kits Installation Instructions (also for P1-400 subfeed)*. 11-A-1102-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1102-01_CNLKxxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1102-01_CNLKxxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S257 [SRC-00257] Siemens Industry, Inc.. *P1 Panelboard Kit LNLK30A, LNLK42A & LNLK54A 2/0 Neutral Lug Kits Installation Instructions*. 11-A-1103-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1103-01_LNLKxxA_instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1103-01_LNLKxxA_instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S258 [SRC-00258] Siemens Industry, Inc.. *P1-250 Panelboard Kit 2NLK30A, 2NLK42A & 2NLK54A 200% Neutral Lug Kits Installation Instructions*. 11-A-1104-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1104-01_2NLKxxA_instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1104-01_2NLKxxA_instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S259 [SRC-00259] Siemens Industry, Inc.. *P1-250 Panelboard Kit MLKA1A & MLKA3A Main / Feed Thru Lugs Installation Instructions*. 11-A-1105-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1105-01_MLKAxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1105-01_MLKAxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S260 [SRC-00260] Siemens Industry, Inc.. *P1-250 Panelboard Kit MLKC1A & MLKC3A Main / Feed-thru (copper) Lugs Installation Instructions*. 11-A-1106-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1106-01_MLKCxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1106-01_MLKCxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S261 [SRC-00261] Siemens Industry, Inc.. *P1-400 Panelboard Kit 42NLK30A, 42NLK42A, 42NLK54A Installation Instructions with 200% Neutral*. 11-A-1107-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1107-01_42NLKxxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1107-01_42NLKxxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S262 [SRC-00262] Siemens Industry, Inc.. *P1-400 Panelboard Kit 4MLKA1A, 4MLKA3A Main / Feed-thru Lugs Installation Instructions*. 11-A-1108-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1108-01_4MLKAxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1108-01_4MLKAxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S263 [SRC-00263] Siemens Industry, Inc.. *P1-400 Panelboard Kit 4MLKC1A, 4MLKC3A Copper Lugs Installation Instructions*. 11-A-1109-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1109-01_4MLKCxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1109-01_4MLKCxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S264 [SRC-00264] Siemens Industry, Inc.. *P1-400 Panelboard Kit 4MLKA1B, 4MLKA3B 750 kcmil Main / Feed-thru Lugs Instructions*. 11-A-1110-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1110-01_4MLKAxB_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1110-01_4MLKAxB_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S265 [SRC-00265] Siemens Industry, Inc.. *P1-250 Panelboard Kit MBKFD1A & MBKFD3A FD Main/Subfeed Breaker Instructions (also P1-400 subfeed)*. 11-A-1111-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1111-01_MBKFDxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1111-01_MBKFDxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S266 [SRC-00266] Siemens Industry, Inc.. *P1-250 Panelboard Kit MBKED1A & MBKED3A ED Main/Subfeed Breaker Instructions (also P1-400 subfeed)*. 11-A-1113-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1113-01_MBKEDxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1113-01_MBKEDxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S267 [SRC-00267] Siemens Industry, Inc.. *P1-250 Panelboard Kit MBKBFA for BL/BQD/GB Main Breaker Installation Instructions*. 11-A-1114-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1114-01_MBKBFA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1114-01_MBKBFA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S268 [SRC-00268] Siemens Industry, Inc.. *P1-400 Panelboard Kit MBKJD1A & MBKJD3A JD Main Breaker Kit Instructions*. 11-A-1115-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1115-01_MBKJDxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1115-01_MBKJDxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S269 [SRC-00269] Siemens Industry, Inc.. *250A OEM Chassis Instructions (Revised P1)*. 11-A-1117-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1117-01_250A_OEM_Chassis_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1117-01_250A_OEM_Chassis_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S270 [SRC-00270] Siemens Industry, Inc.. *P1 Panelboard Replacement Parts Kit P1CONACPHAL & P1CONACPHCU A/C-Phase Connector Kits Instructions*. 11-A-1119-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1119-01_P1CONACPHxx_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1119-01_P1CONACPHxx_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S271 [SRC-00271] Siemens Industry, Inc.. *P1 Panelboard Replacement Parts Kit P1CONBPHAL & P1CONBPHCU B-Phase Connector Kits Instructions*. 11-A-1122-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1122-01_P1CONBPHxx_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1122-01_P1CONBPHxx_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S272 [SRC-00272] Siemens Industry, Inc.. *SEB / SEBD Installation Instructions - Siemens EB circuit breakers in switchboard or shallow/deep panelboards*. 11-B-1020-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEB_SEBD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEB_SEBD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S273 [SRC-00273] Siemens Industry, Inc.. *Switchboard/Powerpanel Kit SQRD / 6QR2 / SQR Installation Instructions for Branch Mounting of 225A MAX QR Breakers*. 11-A-1133-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SQRD6QR2SQR.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SQRD6QR2SQR.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S274 [SRC-00274] Siemens Industry, Inc.. *Switchboard (SB1, SB2, SB3) / Power Panel (P4, P5) Kit SDG, SDGD for Branch Mounting Type VL DG Frame Breakers*. 11-B-1023-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SDG_SDGD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SDG_SDGD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S275 [SRC-00275] Siemens Industry, Inc.. *Switchboard (SB1, SB2, SB3) / Power Panel Kit (P5) SJG2D for Branch Mounting Type VL JG Frame Breakers*. 11-B-1026-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SJG2D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SJG2D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S276 [SRC-00276] Siemens Industry, Inc.. *Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SJG, SJG1D, SLG, SLGD for Branch Mounting Type VL JG, LG Frame Breakers*. 11-B-1025-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SJG_SJG1D_SLG_SLGD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SJG_SJG1D_SLG_SLGD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S277 [SRC-00277] Siemens Industry, Inc.. *Switchboard/Power Panel Kit MG1/MG1D/SLM1/SLM1D for Branch Mounting Sentron LMD and VL MG Frame Breakers*. 11-B-1016-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MG1_MG1D_SLM1_SLM1D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MG1_MG1D_SLM1_SLM1D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S278 [SRC-00278] Siemens Industry, Inc.. *Power Panel / Switchboard Kit SGB2 / SGB2D Instructions for Branch Mounting Type GB2 Breakers*. 12-A-1031-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_12-A-1031-01_SGB2_SGB2D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_12-A-1031-01_SGB2_SGB2D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S279 [SRC-00279] Siemens Industry, Inc.. *P4 and P5 Power Panel / Distribution Switchboard Kit S3VA41T / S3VA41TD for Branch Mounting of Type 3VA41 or xGB Breakers*. 11-B-1057-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1057-01_S3VA41T_S3VA41TD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1057-01_S3VA41T_S3VA41TD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S280 [SRC-00280] Siemens Industry, Inc.. *Distribution Switchboard / Power Panel Kit S3VA41TDHD for Branch Mounting of 2-pole 3VA41 or xGB Breakers (high density)*. 11-B-1058-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1058-01_S3VA41TDHD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1058-01_S3VA41TDHD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S281 [SRC-00281] Siemens Industry, Inc.. *Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA52T / S3VA52TD Installation Instructions for Type 3VA52/61/62 Breaker*. 11-A-1168-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Switchboard-PowerPanels_11-A-1168-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Switchboard-PowerPanels_11-A-1168-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S282 [SRC-00282] Siemens Industry, Inc.. *Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA53T / S3VA53TD for Single-Mount 3VA53 / 3VA63 Breaker*. 15-A-1078-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_S3VA53T-TD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_S3VA53T-TD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S283 [SRC-00283] Siemens Industry, Inc.. *Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA54T / S3VA54TD for Single-Mount 3VA54 / 3VA64 Breaker*. 15-A-1079-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_S3VA54T-TD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_S3VA54T-TD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S284 [SRC-00284] Siemens Industry, Inc.. *Switchboard/Power Panel Kit SNBD/SNB for Branch Mounting Type GB Breakers*. 11-B-1019-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SNBDSNB.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SNBDSNB.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S285 [SRC-00285] Siemens Industry, Inc.. *CAT. NO. 6E62 instruction sheet with drawing 11-5079-00 Rev 10 'ED2, ED4 & ED6 Mounting Series 6 Branch Bus' and BOM 11-5079-05 Rev 8*. 31-1143-01 Rev. 4. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6E62_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6E62_old.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S286 [SRC-00286] Siemens Industry, Inc.. *CAT. NO. 6F62 instruction sheet with drawing 11-5098-00 Rev 6 'FD Frame Mounting Series 6 Branch Bus', BOM 11-5098-04 Rev 8, Series 5 adaptor kit 11-5570-01 Rev 3*. 31-1145-01 Rev. 4. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6F62_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6F62_old.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S287 [SRC-00287] Siemens Industry, Inc.. *CAT. NO. 6JJ62 instruction sheet with drawing 12-5721 Rev 11 'JD Frame Twin Mounting Series 6 Branch' (-01 = 6JJ62, -02 = SJ2D) and Series 5 adaptor kit 11-5570-02*. 31-1169-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6JJ62_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6JJ62_old.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S288 [SRC-00288] Siemens Industry, Inc.. *Distribution Switchboard / P5 38in wide Power Panel Mounting Kit S3VA53T2D / S3VA54T2D Instructions for Twin-mount 3VA53, 3VA63, 3VA54 or 3VA64 breakers*. 11-B-1086-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SB_11-B-1086-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SB_11-B-1086-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S289 [SRC-00289] Siemens Industry, Inc.. *Distribution Switchboard or P5 Power Panel Strap Mounting Kit S3VA55TD for 800A 3VA55/65 or 1000A 3VA66 Breaker*. 11-B-1097-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SB_S3VA55TD_11-B-1097-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SB_S3VA55TD_11-B-1097-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S290 [SRC-00290] Siemens Industry, Inc.. *Switchboard / P5 Powerpanel Strap Mounting Kit S3VA57TD for a 1,200A 3VA57 or 3VA67 Breaker*. 11-B-1101-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-B-1101-01_S3VA55TD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-B-1101-01_S3VA55TD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S291 [SRC-00291] Siemens Industry, Inc.. *Power Panel Kit (P4, P5) SMBKL6 / SMBKL6D for Main Mounting Sentron JD & LD Frame Breakers*. 11-D-1019-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SMBKL6SMBKL6D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SMBKL6SMBKL6D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S292 [SRC-00292] Siemens Industry, Inc.. *Power Panel Kit (P4, P5) SMBKLG, SMBKLG1D for Main Mounting Type VL JG, LG Frame Breakers*. 11-D-1022-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SMBKLG_SMBKL_G1D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SMBKLG_SMBKL_G1D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S293 [SRC-00293] Siemens Industry, Inc.. *Power Panel Kit (P4, P5) SMBKMG, SMBKMG1D for Main Mounting Type VL MG Frame Breakers*. 11-D-1020-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SMBKMGSMBKMG1DP.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SMBKMGSMBKMG1DP.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S294 [SRC-00294] Siemens Industry, Inc.. *Power Panel Kit (P4, P5) SMLK12 for Main Lug Mounting (400-1200A)*. 11-D-1018-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SMLK12.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SMLK12.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S295 [SRC-00295] Siemens Industry, Inc.. *Installation Instructions - general use of Siemens P5 32in or 38in wide Power Panel (P5X60MC120EH32, P5X75MC120EH32, P5X90MC120EH32, P5X90MC120EH)*. 11-D-1013-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_P5_11-D-1013-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_P5_11-D-1013-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S296 [SRC-00296] Siemens Industry, Inc.. *P4 / P5 Series Panelboard Box Installation For Seismic-Rated Panelboards*. 12-B-1015-01 Rev. 03. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SeismicP4-P5_Panelboard.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SeismicP4-P5_Panelboard.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S297 [SRC-00297] Siemens Industry, Inc.. *Revised P1 (P1-250 / P1-400) Hardware Tightening Torque instructions label*. 11-D-1030-01 Rev. 03. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-D-1030-01_RP1-Torque_Val.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-D-1030-01_RP1-Torque_Val.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S298 [SRC-00298] Siemens Industry, Inc.. *P2 & P3 Panelboard Kit BBKGB32 Installation Instructions for Branch Mounting Type GB2 Breakers*. 12-A-1030-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_BBKGB32_12-a-1030-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_BBKGB32_12-a-1030-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S299 [SRC-00299] Siemens Industry, Inc.. *P2 & P3 Panelboard Kit BBKNB32 Installation Instructions for Branch Mounting Type GB Breakers*. 12-A-1092-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1092-01_BBKNB32.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_12-A-1092-01_BBKNB32.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S300 [SRC-00300] Siemens Industry, Inc.. *BBKVA4P2P3 Type 3VA41 or xGB Branch Breaker Mounting Kit Installation Instructions for P2 or P3 Panelboards*. 11-B-1055-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_BBKVA4P2P3_InstructionSheet.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_BBKVA4P2P3_InstructionSheet.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S301 [SRC-00301] Siemens Industry, Inc.. *P2 Panelboard Kit BBKQR1 Installation Instructions for Branch Mounting of 225A MAX QR Breakers*. 11-A-1131-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_BBKQR1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_BBKQR1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S302 [SRC-00302] Siemens Industry, Inc.. *P3 Panelboard Kit BBKQR2 Installation Instructions for Branch Mounting of 225A MAX QR Breakers*. 11-A-1132-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1132-01_BBKQR2.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1132-01_BBKQR2.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S303 [SRC-00303] Siemens Industry, Inc.. *BBKVA5262P2HW hardware kit instructions (3VA52/61/62 breaker to P2/P3 strap kit)*. 11-B-1050-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_BBKVA5262P2HW_11-B-1050-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_BBKVA5262P2HW_11-B-1050-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S304 [SRC-00304] Siemens Industry, Inc.. *P2 / P3 Panelboard Kit BBKVA5262P2S Installation Instructions for Branch Mounting 3VA52 / 3VA61 / 3VA62 Circuit Breakers*. 11-B-1051-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_BBKVA5262P2S_11-B-1051-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_BBKVA5262P2S_11-B-1051-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S305 [SRC-00305] Siemens Industry, Inc.. *BBKVA52P3HW hardware kit instructions (3VA52 FAS breaker in P3 twin strap kit; supersedes breaker instructions above 500 V)*. 11-A-1166-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-a-1166-01_BBKVA52P3HW_3VA52.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-a-1166-01_BBKVA52P3HW_3VA52.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S306 [SRC-00306] Siemens Industry, Inc.. *P3 Panelboard Kit BBKVA52P3T Installation Instructions for Branch Mounting of Twin FAS (3VA52) Breakers*. 11-A-1167-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-a-1167-01_BBKVA52P3T_3VA52.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-a-1167-01_BBKVA52P3T_3VA52.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S307 [SRC-00307] Siemens Industry, Inc.. *P1-250 Panelboard Kit MBKBL1A & MBKBL3A BL Main/Subfeed Breaker Instructions (also P1-400 subfeed)*. 11-A-1140-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-a-1140-01_MBKBLxA.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-a-1140-01_MBKBLxA.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S308 [SRC-00308] Siemens Industry, Inc.. *P1-250 Panelboard Kit MBKBC1NBA & MBKBC3NBA BQD / GB Main/Subfeed Breaker Instructions (also P1-400 subfeed)*. 11-A-1141-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MBKBCxNBA_11-a-1141-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MBKBCxNBA_11-a-1141-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S309 [SRC-00309] Siemens Industry, Inc.. *MBKVA41A or MBKVA41B BL / BQD / xGB / 3VA4 Main / Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)*. 11-A-1193-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1193-01_MBKVA41x_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1193-01_MBKVA41x_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S310 [SRC-00310] Siemens Industry, Inc.. *MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)*. 11-B-1059-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_MBKVAxx_11-B-1059-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_MBKVAxx_11-B-1059-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S311 [SRC-00311] Siemens Industry, Inc.. *MBKVA5363A 3VA Main Strap Kit Installation Instructions for P1-400 Panelboards*. 11-A-1169-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1169-01_MBKVA5363A.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1169-01_MBKVA5363A.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S312 [SRC-00312] Siemens Industry, Inc.. *P1-400 Panelboard Kit MBKJD1A & MBKJD3A (MBKJD3B) JD Main Breaker Kit Instructions, Rev. 05*. 11-A-1115-01 Rev. 05. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1115-01_MBKJD3B_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1115-01_MBKJD3B_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S313 [SRC-00313] Siemens Industry, Inc.. *S1 & P1 Panelboard Kit MBKQR1 & MBKQR3 for 225A MAX QR Main/Subfeed Breaker (NOT for Revised P1)*. 11-A-1138-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MBKQR1_MBKQR3.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MBKQR1_MBKQR3.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S314 [SRC-00314] Siemens Industry, Inc.. *MBKQRC1FK C1 Filler Kit for QR Breaker Installation Instructions*. 11-A-1137-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MBKQRC1FK.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MBKQRC1FK.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S315 [SRC-00315] Siemens Industry, Inc.. *BBKQRP1FK filler kit for horizontally or vertically mounted 225A MAX QR breaker (P2)*. 11-A-1135-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1135-01_BBKQRP1FK.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1135-01_BBKQRP1FK.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S316 [SRC-00316] Siemens Industry, Inc.. *BBKQRP2FK filler kit for dual-mounted horizontal 225A MAX QR breakers (P3)*. 11-A-1136-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1136-01_BBKQRP2FK.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1136-01_BBKQRP2FK.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S317 [SRC-00317] Siemens Industry, Inc.. *MBKQRFK P1 / RP1 Filler Kit for QR Breaker Installation Instructions*. 11-A-1134-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MBKQRFK.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MBKQRFK.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S318 [SRC-00318] Siemens Industry, Inc.. *LNLK4X11B, LNLK6X17B or LNLK7X20B 2/0 Neutral Lug Kit Instructions for P1 or P3 Panelboards (Revised P1 only)*. 11-B-1032-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1032-01_LNLKxxxxB_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1032-01_LNLKxxxxB_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S319 [SRC-00319] Siemens Industry, Inc.. *LNLK5X12A or LNLK7X18A 1/0 Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)*. 11-B-1036-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1036-01_LNLKxxxxA_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1036-01_LNLKxxxxA_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S320 [SRC-00320] Siemens Industry, Inc.. *CNLK42B or CNLK54B Copper Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)*. 11-B-1033-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1033-01_CNLKxxB_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1033-01_CNLKxxB_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S321 [SRC-00321] Siemens Industry, Inc.. *2NLK42B or 2NLK54B 200% Neutral Lug Kit for P1-250 Panels (Revised P1 only)*. 11-B-1034-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1034-01_2NLKxxB_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1034-01_2NLKxxB_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S322 [SRC-00322] Siemens Industry, Inc.. *42NLK54B 200% Neutral Lug Kit for 30, 42, 54 or 66 Circuit P1-400 Panels (Revised P1 only)*. 11-B-1035-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1035-01_42NLK54B_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1035-01_42NLK54B_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S323 [SRC-00323] Siemens Industry, Inc.. *SEBKRP1V1 / SEBKRP1V2 Service Entrance Barrier Kits for Revised P1 Panelboards*. 11-A-1148-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1148-01_SEBKRP1V1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1148-01_SEBKRP1V1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S324 [SRC-00324] Siemens Industry, Inc.. *SEBKRP1V3 / SEBKRP1V4 Service Entrance Barrier Kits for Revised P1 Panelboards*. 11-A-1149-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1149-01_SEBKRP1V3.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1149-01_SEBKRP1V3.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S325 [SRC-00325] Siemens Industry, Inc.. *SEBKRP1V5 Service Entrance Barrier Kit for Revised P1 Panelboards*. 11-A-1165-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1165-01_SEBKRP1V5.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1165-01_SEBKRP1V5.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S326 [SRC-00326] Siemens Industry, Inc.. *SEBKRP1V6 Service Entrance Barrier Kit for Revised P1 Panelboard*. 11-A-1194-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1194-01_SEBKRP1V6_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1194-01_SEBKRP1V6_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S327 [SRC-00327] Siemens Industry, Inc.. *SEBKRP1V7 Service Entrance Barrier Kit for RP1 Panelboard*. 11-B-1060-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1060-01_SEBKRP1V7.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1060-01_SEBKRP1V7.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S328 [SRC-00328] Siemens Industry, Inc.. *SEBKP2V1 / SEBKP2V2 Service Entrance Barrier Kit for P2 Panelboards*. 11-A-1151-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1151-01_SEBKP2V1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1151-01_SEBKP2V1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S329 [SRC-00329] Siemens Industry, Inc.. *SEBKP2V3 Service Entrance Barrier Kit for P2 or P3 Panelboards (with or without SEM3)*. 11-A-1153-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1153-01_SEBKP2V3.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1153-01_SEBKP2V3.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S330 [SRC-00330] Siemens Industry, Inc.. *SEBKP2V4 / SEBKP3V1 Service Entrance Barrier Kits (vertical mains) for P2 / P3*. 11-A-1154-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1154-01_SEBKP2V4_SEBKP3V1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1154-01_SEBKP2V4_SEBKP3V1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S331 [SRC-00331] Siemens Industry, Inc.. *SEBKP2V5 Service Entrance Barrier Kit for P2 (ED/CED main)*. 11-A-1155-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1155-01_SEBKP2V5.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1155-01_SEBKP2V5.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S332 [SRC-00332] Siemens Industry, Inc.. *SEBKP2V6 Service Entrance Barrier Kit for P2 (vertical ED main)*. 11-A-1156-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1156-01_SEBKP2V6.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1156-01_SEBKP2V6.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S333 [SRC-00333] Siemens Industry, Inc.. *SEBKP1P2P3V1 Service Entrance Barrier Kit for Revised P1, P2 or P3*. 11-A-1157-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1157-01_SEBKP1P2P3V1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1157-01_SEBKP1P2P3V1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S334 [SRC-00334] Siemens Industry, Inc.. *SEBP4V1 Service Entrance Barrier Kit for P4 or P5*. 11-A-1158-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEBP4V1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEBP4V1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S335 [SRC-00335] Siemens Industry, Inc.. *SEBP4V2 Service Entrance Barrier Kit for P4 or P5*. 11-A-1159-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEBP4V2.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEBP4V2.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S336 [SRC-00336] Siemens Industry, Inc.. *SEBP4V3 Service Entrance Barrier Kit for P4 or P5*. 11-A-1162-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEBP4V3.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEBP4V3.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S337 [SRC-00337] Siemens Industry, Inc.. *SEBP5V1 / SEBP5V2 Service Entrance Barrier Kit for P5*. 11-A-1160-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEBP5V1_SEBP5V2.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEBP5V1_SEBP5V2.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S338 [SRC-00338] Siemens Industry, Inc.. *SEBP5V3 Service Entrance Barrier Kit for P5 (Vacu-Break main switch)*. 11-A-1163-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEBP5V3.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEBP5V3.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S339 [SRC-00339] Siemens Industry, Inc.. *SEBP5V4 Service Entrance Barrier Kit for P5 (HCP main)*. 11-A-1164-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEBP5V4.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEBP5V4.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S340 [SRC-00340] Siemens Industry, Inc.. *SEBPPVA1 Service Entrance Barrier Kit for Switchboard or P4/P5 (3VA53/63/54/64)*. 15-A-1081-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_15-A-1081-01_SEBPPVA1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_15-A-1081-01_SEBPPVA1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S341 [SRC-00341] Siemens Industry, Inc.. *SEBPPVA2 Service Entrance Barrier Kit for 3VA55, 3VA65 or 3VA66 Breaker in a P5 Panelboard*. 11-B-1095-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-B-1095-01_SEBPPVA2.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-B-1095-01_SEBPPVA2.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S342 [SRC-00342] Siemens Industry, Inc.. *DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels*. 11-A-1180-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1180-01_DFFPxxxx_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1180-01_DFFPxxxx_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S343 [SRC-00343] Siemens Industry, Inc.. *DFFPVA5262A Filler Plate Kit replacement filler plate (3VA52/61/62)*. 11-B-1061-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_DFFPVA5262A_FillerPlateKit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_DFFPVA5262A_FillerPlateKit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S344 [SRC-00344] Siemens Industry, Inc.. *DFFPVA5262P2A filler plate (3VA52/61/62 single mount) installation*. 11-B-1052-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_DFFPVA5262P2A_FillerPlate.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_DFFPVA5262P2A_FillerPlate.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S345 [SRC-00345] Siemens Industry, Inc.. *DFFPVA5262P2B Provision Plate kit installation*. 11-B-1053-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_DFFPVA5262P2B_ProvisionPlate.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_DFFPVA5262P2B_ProvisionPlate.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S346 [SRC-00346] Siemens Industry, Inc.. *DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards*. 11-A-1182-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1182-01_DFKxx.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1182-01_DFKxx.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S347 [SRC-00347] Siemens Industry, Inc.. *DFP3AP01 replacement Adaptor Plate for BL/BQD/ED/GB/GB2 breaker in P3*. 11-A-1178-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1178-01_DFP3AP01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1178-01_DFP3AP01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S348 [SRC-00348] Siemens Industry, Inc.. *LPP2NB01 neutral lug replacement / addition kit for P2 panelboard*. 11-A-1179-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1179-01_LPP2NB01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1179-01_LPP2NB01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S349 [SRC-00349] Siemens Industry, Inc.. *BNK350N 350 MCM narrow neutral lug replacement kit for P2 and P3*. 11-A-1177-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1177-01_BNK350N.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1177-01_BNK350N.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S350 [SRC-00350] Siemens Industry, Inc.. *LPDC01 panelboard directory card kit*. 11-A-1184-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1184-01_LPDC01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1184-01_LPDC01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S351 [SRC-00351] Siemens Industry, Inc.. *LPLOCK01A / LPLOCK02A replacement panelboard door locks*. 11-A-1175-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1175-01_LPLOCK0xA.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1175-01_LPLOCK0xA.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S352 [SRC-00352] Siemens Industry, Inc.. *EWK1 / EWK2 / EWK1B / EWK2B box end wall kits*. 11-A-1004-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_EWK1-2-1B-2B-11-A-1004-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_EWK1-2-1B-2B-11-A-1004-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S353 [SRC-00353] Siemens Industry, Inc.. *EWK3 instructions for special open endwall*. 11-A-1143-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_EWK3_11-A-1143-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_EWK3_11-A-1143-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S354 [SRC-00354] Siemens Industry, Inc.. *BXXCVR extension cover mounting instructions*. 11-A-1144-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_BXXCVR_11-A-1144-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_BXXCVR_11-A-1144-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S355 [SRC-00355] Siemens Industry, Inc.. *B74FLR preparation for installation instructions (74 in box)*. 11-A-1129-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_B74FLR_11-A-1129-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_B74FLR_11-A-1129-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S356 [SRC-00356] Siemens Industry, Inc.. *NBK01A / NBK02A / NBK03A circuit numbering strips for Revised P1*. 11-A-1197-00 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1197_NBK0xA_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1197_NBK0xA_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S357 [SRC-00357] Siemens Industry, Inc.. *P1DFS250AFT or P1DFS250ANFT RP1-250 Panelboard Deadfront Supports*. 11-A-1196-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1196-01_P1DFS250AxFT.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1196-01_P1DFS250AxFT.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S358 [SRC-00358] Siemens Industry, Inc.. *P1DFS400A RP1-400 Panel Deadfront Supports*. 11-A-1190-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_RP1_11-A-1190-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_RP1_11-A-1190-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S359 [SRC-00359] Siemens Industry, Inc.. *S3VA52PR provision kit (3VA52/61/62 nut keepers and bus extensions)*. 11-A-1171-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1171-01_S3VA52PR.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1171-01_S3VA52PR.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S360 [SRC-00360] Siemens Industry, Inc.. *SQRC QR Breaker Retrofit Field Kit Installation Instructions for P4/P5/SB*. 11-A-1139-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SQRC.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SQRC.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S361 [SRC-00361] Siemens Industry, Inc.. *Lighting Panel Ground Bus Information: P1-P2-P3 (EGK / ECGK / IGK / ICGK)*. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_EGK_LightingPanel_GroundBus_Information.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_EGK_LightingPanel_GroundBus_Information.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S362 [SRC-00362] Siemens Industry, Inc.. *Trim & Hinge Installation Instructions (P4 / P5)*. 11-A-1078-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1078-01.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/SIE_IS_Panelboard_11-A-1078-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S363 [SRC-00363] Siemens Industry, Inc.. *Switchboard/Powerpanel Kit SBLBD/SBL for Branch Mounting Type BL/BQDH Breakers (scanned; read visually)*. 11-B-1013-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SBL_SBLBD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SBL_SBLBD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S364 [SRC-00364] Siemens Industry, Inc.. *Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)*. 11-B-1012-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SJ1D_SSJ1D_SL6D_SSL6D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SJ1D_SSJ1D_SL6D_SSL6D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S365 [SRC-00365] Siemens Industry, Inc.. *P2 & P3 Panelboard Kit BBKB32 For Branch Mounting of BL & BQD Breakers (scanned; read visually)*. 12-A-1078-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1078-01_BBKB32.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_12-A-1078-01_BBKB32.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S366 [SRC-00366] Siemens Industry, Inc.. *P2 & P3 Panelboard Kit BBKED32 For Branch Mounting of ED Breakers (scanned; read visually)*. 12-A-1079-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1079-01_BBKED32.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_12-A-1079-01_BBKED32.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S367 [SRC-00367] Siemens Industry, Inc.. *P3 Panelboard Kit BBKQ2 For Branch Mounting of QJ Breakers (scanned; read visually)*. 12-A-1081-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1081-01_BBKQ2.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_12-A-1081-01_BBKQ2.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S368 [SRC-00368] Siemens Industry, Inc.. *P3 Panelboard Kit BBKEB32 For Branch Mounting of EB Breakers (scanned; read visually)*. 12-A-1093-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1093-01_BBKEB32.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_12-A-1093-01_BBKEB32.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S369 [SRC-00369] Siemens Industry, Inc.. *CAT. NO. SCE - CED6 breaker mounting, S4 copper branch bus (drawing 15-B-2012-00 / BOM 15-B-2012-05 Rev 4)*. 31-1200-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1200-01_SCE.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1200-01_SCE.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S370 [SRC-00370] Siemens Industry, Inc.. *CAT. NO. SF6 - F6 frame mounting S4 copper branch bus (drawing 15-B-2014-00 Rev 4 / BOM 15-B-2014-03 Rev 7)*. 31-1202-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1202-01_SF6.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1202-01_SF6.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S371 [SRC-00371] Siemens Industry, Inc.. *CAT. NO. SCF - 225 A CLF breaker, S4 copper branch bus (drawing 15-B-2016-00 Rev 2 'CLF main/branch kit SPP (shallow)' / BOM 15-B-2016-03 Rev 5)*. 31-1204-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1204-01_SCF.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1204-01_SCF.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S372 [SRC-00372] Siemens Industry, Inc.. *CAT. NO. SCJ - CJD6 (CLJ, CJD6) breaker mounting, S4 copper branch bus (drawing 12-B-2002-00 Rev 6 / BOM 12-B-2002-03 Rev 4)*. 31-1208-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1208-01_SCJ.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1208-01_SCJ.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S373 [SRC-00373] Siemens Industry, Inc.. *CAT. NO. SCL - CLD6 (CLL, CLD) breaker mounting, S4 copper branch bus (drawing 12-B-2006-00 Rev 7 / BOM 12-B-2006-03 Rev 7)*. 31-1212-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1212-01_SCL.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1212-01_SCL.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S374 [SRC-00374] Siemens Industry, Inc.. *CAT. NO. SSCL - SCLD6 breaker mounting, S4 copper branch bus (drawing 12-B-2013-00 Rev 4 / BOM 12-B-2013-03 Rev 7)*. 31-1213-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1213-01_SSCL.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1213-01_SSCL.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S375 [SRC-00375] Siemens Industry, Inc.. *CAT. NO. SF6D - FD6 frame mounting S4/S5 copper branch bus (drawing 11-5098-00 Rev 6 / BOM 11-5098-03 Rev 9)*. 31-1218-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1218-01_SF6D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1218-01_SF6D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S376 [SRC-00376] Siemens Industry, Inc.. *CAT. NO. SCFD - CFD6 branch breaker mounting S4/S5 copper bus (drawing 11-5383-00 Rev 5 / BOM 11-5383-02 Rev 8)*. 31-1220-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1220-01_SCFD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1220-01_SCFD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S377 [SRC-00377] Siemens Industry, Inc.. *CAT. NO. SCJD - drawing 12-5719 Rev 10 'CJD frame mount Series 6 - branch'*. 31-1225-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1225-01_SCJD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1225-01_SCJD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S378 [SRC-00378] Siemens Industry, Inc.. *CAT. NO. SSCLD - drawing 12-5772 Rev 8 'SCLD frame mount Series 6 - branch'*. 31-1230-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1230-01_SSCLD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1230-01_SSCLD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S379 [SRC-00379] Siemens Industry, Inc.. *CAT. NO. SCLD - drawing 12-5720 Rev 11 'CLD frame mount Series 6 - branch' (-01 = 6CLL1, -02 = SCLD)*. 31-1229-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_12-5720-02_SCLD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_12-5720-02_SCLD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S380 [SRC-00380] Siemens Industry, Inc.. *CAT. NO. SCED - CED6 branch breaker mounting S5 copper branch bus (drawing 11-5068-00 Rev 2 / BOM 11-5068-06 Rev 3)*. 31-1216-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-5068-01_SCED.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-5068-01_SCED.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S381 [SRC-00381] Siemens Industry, Inc.. *Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SFG, SFGD for Branch Mounting Type VL FG Frame Breakers (scanned; read visually)*. 11-B-1024-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-B-1024-01_SFG_SFGD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-B-1024-01_SFG_SFGD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S382 [SRC-00382] Siemens Industry, Inc.. *EB Deadfront Filler EBF1 installation instruction card (drawing 11-D-1017)*. 11-D-1017-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_EBF1_11-d-1017.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_EBF1_11-d-1017.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S383 [SRC-00383] Siemens Industry, Inc.. *P3 Bonding Kit P3BK1 instruction card (drawing 11-D-1007)*. 11-D-1007-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_P3BK1_11-d-1007.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_P3BK1_11-d-1007.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S384 [SRC-00384] Siemens Industry, Inc.. *Mounting and Leveling Kit IMK1 instruction card*. 11-A-1002-01 Rev. 4. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_IMK1_11-a-1002.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_IMK1_11-a-1002.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S385 [SRC-00385] Siemens Industry, Inc.. *BK1A Bonding Kit for P1-250 & P1-400 instruction card*. 11-A-1096-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1096-01_BLK1A_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1096-01_BLK1A_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S386 [SRC-00386] Siemens Industry, Inc.. *P2 Panelboard Kit DFK1 For Dead Front Coverage of 1in Pole Breaker Modules*. 12-A-1082-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1082-01_DFK1.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/SIE_IS_12-A-1082-01_DFK1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S387 [SRC-00387] Siemens Industry, Inc.. *P2 & P3 Panelboard Kit DFFP3 For Dead Front Coverage of a 3 in Unallocated Branch Space*. 12-A-1083-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1083-01_DFFP3.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/SIE_IS_12-A-1083-01_DFFP3.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S388 [SRC-00388] Siemens Industry, Inc.. *P2 & P3 Panelboard Kit DFFP6 For Dead Front Coverage of a 6 in Unallocated Branch Space*. 12-A-1084-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1084-01_DFFP6.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/SIE_IS_12-A-1084-01_DFFP6.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S389 [SRC-00389] Siemens Industry, Inc.. *CAT. NO. F602 Vacu-Break mounting F1 branch kit, 2.5 in & 5 in high twin units (drawing 11-B-2000-00 Rev 3 / BOM 11-B-2000-02 Rev 6) for SPP/FPP/S4/F1/P4 (shallow box)*. 11-B-1001-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-B-1001-01_F602.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-B-1001-01_F602.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S390 [SRC-00390] Siemens Industry, Inc.. *CAT. NO. F657 Vacu-Break mounting F1 branch kit, 7.5 in high twin units (drawing 11-B-2001-00 Rev 3 / BOM 11-B-2001-02 Rev 6) for SPP/FPP/S4/F1/P4 (shallow box)*. 11-B-1002-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-B-1002-01_F657.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-B-1002-01_F657.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S391 [SRC-00391] Siemens Industry, Inc.. *CAT. NO. F671 Vacu-Break mounting F1 branch kit, 7.5 in & 10 in high single units (10 in unit) (drawing 11-B-2002-00 Rev 2 / BOM 11-B-2002-04 Rev 7) for SPP/FPP/S4/F1/P4 (shallow box)*. 11-B-1004-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-B-1004-01_F671.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-B-1004-01_F671.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S392 [SRC-00392] Siemens Industry, Inc.. *CAT. NO. F602D Vacu-Break mounting kit for 2.5 in high twin units (30A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)*. 31-1239-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1239-01_F602D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1239-01_F602D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S393 [SRC-00393] Siemens Industry, Inc.. *CAT. NO. F657D Vacu-Break mounting kit for 5 in and 7.5 in high twin units (30, 60, 100A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)*. 31-1240-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1240-01_F657D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1240-01_F657D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S394 [SRC-00394] Siemens Industry, Inc.. *CAT. NO. F671D Vacu-Break mounting kit for 7.5 in and 10 in high single units (200A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)*. 31-1242-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1242-01_F671D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1242-01_F671D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S395 [SRC-00395] Siemens Industry, Inc.. *Installation Instructions for TPS3 09 in Lighting Panelboards Type P1*. #8177 (12.09.09). 2009-12. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/TPS3_09_P1_Installation.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/TPS3_09_P1_Installation.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S396 [SRC-00396] Siemens Industry, Inc.. *LPJSPDNUT01 J-type speed nut replacement kit*. 11-A-1176-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1176-01_LPJSPDNUT01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1176-01_LPJSPDNUT01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S397 [SRC-00397] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits, Catalog Numbers AMCB6EB, AMCB4SE, AMCB4EB*. DEH047 R02. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295375/ge-industrial-solutions-spectra-series-power-panelboards-amcb6eb-amcb4se-amcb4eb.html (accessed 2026-10-21) Local copy: docs/library/GEA/295375.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S398 [SRC-00398] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB6FJ, AMCB3FJ, AMCB2FJ, AMCB4FJ*. DEH059 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295228/ge-industrial-solutions-spectra-series-power-panelboards-amcb6fj-amcb3fj-amcb2fj-and-amcb4fj.html (accessed 2026-10-21) Local copy: docs/library/GEA/295228.txt Note: Text rendering on manualsdir.com (6 pp.); figures not legible in text mode.

S399 [SRC-00399] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB3GM and AMCB2GM*. DEH060 R04. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295227/ge-industrial-solutions-spectra-series-power-panelboards-amcb2gm-and-amcb3gm.html (accessed 2026-10-21) Local copy: docs/library/GEA/295227.txt Note: Text rendering on manualsdir.com (8 pp.); figures not legible in text mode.

S400 [SRC-00400] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB3KM and AMCB2KM*. DEH061 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295149/ge-industrial-solutions-spectra-series-power-panelboards-amcb2km-and-amcb3km.html (accessed 2026-10-21) Local copy: docs/library/GEA/295149.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S401 [SRC-00401] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB6EY and AMCB4EY*. DEH062 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295168/ge-industrial-solutions-spectra-series-power-panelboards-amcb4ey-and-amcb6ey.html (accessed 2026-10-21) Local copy: docs/library/GEA/295168.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S402 [SRC-00402] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB6GB and AMCB4GB*. DEH40129 R03. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295503/ge-industrial-solutions-spectra-series-power-panelboards-amcb4gb-and-amcb6gb.html (accessed 2026-10-21) Local copy: docs/library/GEA/295503.txt Note: Text rendering on manualsdir.com (6 pp.); figures not legible in text mode.

S403 [SRC-00403] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breaker Mounting Hardware Kits (AHKE1, AHKEL1, AHKF1, AHKG1, AHKJ1, AHKLB1, AHKQ1)*. GEH5913 R02. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295175/ge-industrial-solutions-spectra-series-power-panelboards-circuit-breaker-mounting-hardware-kits.html (accessed 2026-10-21) Local copy: docs/library/GEA/295175.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode. Table 1 columns (line-end screw/torque, load-end screw/torque) are run together in the text rendering; some torque cells appear merged.

S404 [SRC-00404] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Filler Plate Kit AFP6SKS*. GEH5629 R05. 2001-08. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295080/ge-industrial-solutions-spectra-series-power-panelboards-afp6sks.html (accessed 2026-10-21) Local copy: docs/library/GEA/295080.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S405 [SRC-00405] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breaker Cover Plate (TEY, THQB, THHQB)*. DEH044 R02. 2001-08. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295327/ge-industrial-solutions-spectra-series-power-panelboards-circuit-breaker-cover-plate.html (accessed 2026-10-21) Local copy: docs/library/GEA/295327.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S406 [SRC-00406] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breaker Cover (SE, SF, TE, TF, TQ, TEL)*. DEH042 R03. 2001. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294860/ge-industrial-solutions-spectra-series-power-panelboards-se-sf-te-tf-tq-and-tel.html (accessed 2026-10-21) Local copy: docs/library/GEA/294860.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode. Back page with date code not rendered.

S407 [SRC-00407] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breaker Cover (SGDA, SGHA, SGLA, SGPA)*. DEH045 R05. 2001-08. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294801/ge-industrial-solutions-spectra-series-power-panelboards-sgda-sgha-sgla-and-sgpa.html (accessed 2026-10-21) Local copy: docs/library/GEA/294801.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S408 [SRC-00408] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Type AFP Filler Plates*. GEH5590 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295586/ge-industrial-solutions-spectra-series-power-panelboards-afp-filler-plates.html (accessed 2026-10-21) Local copy: docs/library/GEA/295586.txt Note: Text rendering on manualsdir.com (1 pp.); figures not legible in text mode.

S409 [SRC-00409] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Type APP Filler Plates*. GEH5583 R03. 2001-03. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295532/ge-industrial-solutions-spectra-series-power-panelboards-app-filler-plates.html (accessed 2026-10-21) Local copy: docs/library/GEA/295532.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S410 [SRC-00410] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Type APN and APNB Panelboard Interiors into Type APB Panelboard Enclosures*. GEH5589 R07. 2001-05. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295071/ge-industrial-solutions-spectra-series-power-panelboards-apn-and-apnb.html (accessed 2026-10-21) Local copy: docs/library/GEA/295071.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S411 [SRC-00411] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC3FLS, AMC2FLS, AMC4FLS)*. GEH5626 R04. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295056/ge-industrial-solutions-spectra-series-power-panelboards-amc2fj-amc6fls-amc3fls-amc2fls.html (accessed 2026-10-21) Local copy: docs/library/GEA/295056.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S412 [SRC-00412] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC3KM, AMC2KM)*. GEH5623 R04. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295161/ge-industrial-solutions-spectra-series-power-panelboards-amc3km-and-amc2km.html (accessed 2026-10-21) Local copy: docs/library/GEA/295161.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S413 [SRC-00413] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC4GB, AMC6GB)*. GEH5673 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295270/ge-industrial-solutions-spectra-series-power-panelboards-amc4gb-and-amc6gb.html (accessed 2026-10-21) Local copy: docs/library/GEA/295270.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S414 [SRC-00414] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6JK, AMC4JK, AMC3JK, AMC2JK)*. GEH5624 R03. 2001-10. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295363/ge-industrial-solutions-spectra-series-power-panelboards-amc6jk-amc4jk-acm3jk-and-amc2jk.html (accessed 2026-10-21) Local copy: docs/library/GEA/295363.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S415 [SRC-00415] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6EY, AMC6QB)*. GEH5677 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295477/ge-industrial-solutions-spectra-series-power-panelboards-amc6ey-and-amc6qb.html (accessed 2026-10-21) Local copy: docs/library/GEA/295477.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S416 [SRC-00416] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6QD, AMC4QD)*. GEH5643 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295509/ge-industrial-solutions-spectra-series-power-panelboards-amc6qd-and-amc4qd.html (accessed 2026-10-21) Local copy: docs/library/GEA/295509.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S417 [SRC-00417] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6EB, AMC4EB, AMC6EL, AMC6EBS, AMC4EBS, AMC4SE)*. GEH5625 R04. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295561/ge-industrial-solutions-spectra-series-power-panelboards-amc6ebs-amc4ebs-and-amc4se.html (accessed 2026-10-21) Local copy: docs/library/GEA/295561.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S418 [SRC-00418] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Type AMB Main Lug Kit*. DEH070 R02. 2001. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294898/ge-industrial-solutions-spectra-series-power-panelboards-amb-main-lug-kit.html (accessed 2026-10-21) Local copy: docs/library/GEA/294898.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode. Back page with date code not rendered.

S419 [SRC-00419] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Main Lug Kits (AMB...N/CA/DCA)*. DEH071 R02. 2001-10. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294936/ge-industrial-solutions-spectra-series-power-panelboards-bolt-on-main-lug-kits.html (accessed 2026-10-21) Local copy: docs/library/GEA/294936.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S420 [SRC-00420] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Type ANK Neutrals (Model 2)*. GEH5585 R05. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295538/ge-industrial-solutions-spectra-series-power-panelboards-ank-neutrals-model-2.html (accessed 2026-10-21) Local copy: docs/library/GEA/295538.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S421 [SRC-00421] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Equipment Grounds, Types AEG 10, 21, 21S, 31S*. GEH5586 R02. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295598/ge-industrial-solutions-spectra-series-power-panelboards-aeg-10-21-21s-31s.html (accessed 2026-10-21) Local copy: docs/library/GEA/295598.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S422 [SRC-00422] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Neutral and Ground Wire Kit for TVSS, Catalog Number ATHMEGNDN*. DEH40471 R02. 2001-10. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295027/ge-industrial-solutions-spectra-series-power-panelboards-athmegndn.html (accessed 2026-10-21) Local copy: docs/library/GEA/295027.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S423 [SRC-00423] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Type ADF Dead Fronts & Type APF Door Fronts*. GEH5930 R04. 2001. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295209/ge-industrial-solutions-spectra-series-adf-dead-fronts-type-apf-door-fronts.html (accessed 2026-10-21) Local copy: docs/library/GEA/295209.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S424 [SRC-00424] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Permanent Circuit Markers (APN49, APN99)*. GEH5598 R02. 2001-05. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295347/ge-industrial-solutions-spectra-series-power-panelboards-permanent-circuit-markers.html (accessed 2026-10-21) Local copy: docs/library/GEA/295347.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S425 [SRC-00425] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Ground Fault Neutral, 1200 A Maximum*. GEH5683 R02. 2001-10. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294946/ge-industrial-solutions-spectra-series-power-panelboards-ground-fault-neutral-1200-a-maximum.html (accessed 2026-10-21) Local copy: docs/library/GEA/294946.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S426 [SRC-00426] ABB. *ABB empower e-catalog product pages (Spectra Series / A-Series accessories and parts)*. 2026-10. Type: oem_web. URL: https://empower.abb.com/ecatalog/ec/EN_NA/p/<catalog number> (accessed 2026-10-21) Local copy: docs/library/GEA/empower_ge.json Note: Per-part pages fetched by curl 2026-10-21 (e.g. https://empower.abb.com/ecatalog/ec/EN_NA/p/AMCB6FJFP). Description/UPC/spec text stored in empower_ge.json. Absence of a page is NOT evidence of obsolescence (about 200 of 300 numbers returned no product block).

S427 [SRC-00427] ABB. *ABB Quick Selector Guide - Small Projects (distributor edition, Viking Electric) - incl. Tmax XT Retrofit Kits for Spectra Panelboards, ReliaGear neXT renewal parts, Spectra renewal parts*. Type: oem_catalog. URL: https://simplebooklet.com/unnamedsimplebooklet1310?textonly=1 (accessed 2026-10-21) Local copy: docs/library/GEA/sb_unnamedsimplebooklet1310.txt Note: ABB-authored guide republished by distributor on simplebooklet (text-only view). Undated (contains GIZ-1345E 9/19 page). Product number columns of the Spectra renewal-part tables (pp.31-32) are images/missing in text view.

S428 [SRC-00428] ABB. *ReliaGear neXT power panelboards - typical layouts / X-space brochure*. Type: oem_catalog. URL: https://simplebooklet.com/abbreliagearnexttypicals?textonly=1 (accessed 2026-10-21) Local copy: docs/library/GEA/sb_abbreliagearnexttypicals.txt Note: Text-only flip book view.

S429 [SRC-00429] Schneider Electric (Square D). *Power-Style QED-2 Switchboards Instruction Bulletin (English section, (c)1988-2018)*. 80043-055-13. 2018-03. Type: oem_instruction. URL: https://www.manualslib.com/manual/1766524/Square-Qed-2.html (accessed 2026-10-21) Note: Read page-by-page via ManualsLib viewer (WebFetch; direct curl blocked by Cloudflare). Viewer page = printed page + 2. Table cell pairing in Section 9 is partly ambiguous in the text rendering. OEM hosts (productinfo.se.com, download.se.com, download.schneider-electric.com) returned 403 for 80043-055-13/-16.

S430 [SRC-00430] Schneider Electric (Square D). *S33930 Sub-feed Lugs Instruction Bulletin*. 48049-250-01. 2001-05. Type: oem_instruction. URL: https://media.distributordatasolutions.com/schneider_synd_rework/2024q1/documents/e02de0c618489b3ef1b26c3339d7910be3202941.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/48049-250-01_S33930.pdf Note: ECN K512, Cedar Rapids; DistributorDataSolutions mirror.

S431 [SRC-00431] Schneider Electric (Square D). *SL400 Sub-feed Lugs Installation Instruction Bulletin*. 48040-651-03 Rev. 01. 2025-09. Type: oem_instruction. URL: https://images.salsify.com/image/upload/s--vVhIL9Pf--/0cf478d3b3df8a5337f5f8fbda83bb6e1052aaed.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/48040-651-03_Rev01_2025.pdf Note: Linked from graybar.com product page 88243518 (Salsify CDN). Replaces 48040-651-03 ECN 266C 05/2006.

S432 [SRC-00432] Schneider Electric (Square D). *SL400, SL800, SL800FT and SL1200 Sub-feed Lugs Instruction Bulletin*. 48040-651-03. 2006-05. Type: oem_instruction. URL: https://images.salsify.com/image/upload/s--ER73lPOC--/0326786488e6051f5e5b759829da584e174fd205.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/48040-651-03_2006.pdf Note: Older edition covering SL400/SL800/SL800FT/SL1200 (figures only; strip-length table p.3).

S433 [SRC-00433] Schneider Electric. *Product data sheet SL400 - Panelboard accessory, I-Line, lug kit, subfeed, 400A, 6 in*. 2026-06. Type: oem_web. URL: https://images.salsify.com/image/upload/s---BbixrkA--/15ab86f3244aabf9d3a65fe8fc69b8a59c7955a7.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/SL400_datasheet.pdf

S434 [SRC-00434] Schneider Electric. *Square D CF16KF63C STEP model page "1600A 63H DR I-LINE CENTER FEED COPPER BUS OEM QED2 INTERIOR"*. CF16KF63C117UMS-03. 2017-03-10. Type: oem_drawing. URL: https://www.se.com/us/en/download/document/CF16KF63C117UMS-03 (accessed 2026-10-21) Note: Only the document-page metadata was readable (WebFetch); STEP file not downloaded.

S435 [SRC-00435] McGraw-Hill (Westinghouse advertising/catalog pages). *Electrical Construction and Maintenance, Vol 45, September 1946 (Electrical Contracting) - Westinghouse catalog insert 'NOFUZE Circuit Breaker Panelboards' (NMIB, NMM Multibreaker, NLAB Quicklag De-ion, NLAB Single Row Quicklag, NA1B-AB De-ion, MH Multibreaker, AB De-ion Convertible)*. sim_ecm_1946-09_45. 1946-09. Type: archive. URL: https://archive.org/details/sim_ecm_1946-09_45 (accessed 2026-10-21) Note: Full djvu text downloaded from archive.org (https://archive.org/download/sim_ecm_1946-09_45/sim_ecm_1946-09_45_djvu.txt); Westinghouse catalog section around djvu text lines 24280-24705 (page ref B62).

S436 [SRC-00436] McGraw-Hill (General Electric advertisement). *Electrical Construction and Maintenance, Vol 54 No 3, March 1955 - General Electric 'System Engineered' equipment advertisement listing GE panelboard types*. sim_ecm_1955-03_54_3. 1955-03. Type: archive. URL: https://archive.org/details/sim_ecm_1955-03_54_3 (accessed 2026-10-21) Note: OEM-authored advertisement: 'Panelboards - Types NAB, NHB, NLAB, NLTQ, NLTQX, NTP, NTC for lighting - types NCB, CCB, Swing-WA* and Converti-Fuse* for power distribution'. *Registered trade-mark of General Electric Company.

S437 [SRC-00437] McGraw-Hill (Square D advertisement). *Electrical Construction and Maintenance, Vol 59 No 5, May 1960 - Square D advertisement 'Same panelboard combines both lighting and power' (NQO plug-in and NQOB bolted connection panelboards)*. sim_ecm_1960-05_59_5. 1960-05. Type: archive. URL: https://archive.org/details/sim_ecm_1960-05_59_5 (accessed 2026-10-21) Note: Square D Company, Mercer Road, Lexington KY. Breaker ratings table: 1-pole 15-50 A, 2-pole 15-70 A, 3-pole 15-50 A, 2/3-pole 70-100 A.

S438 [SRC-00438] McGraw-Hill (Square D advertisement). *Electrical Construction and Maintenance, Vol 59 No 9, September 1960 - Square D advertisement 'Exclusive Non-Interchangeable Construction standard on all 250 Volt, 100 Amp branch circuit breaker panelboards' (NQO, NQOB, NA1B)*. sim_ecm_1960-09_59_9. 1960-09. Type: archive. URL: https://archive.org/details/sim_ecm_1960-09_59_9 (accessed 2026-10-21) Note: NA1B: E frame, bolted connection, AC or DC; NQO: plug-in connection, AC only; NQOB: bolted connection, AC only; NEC 240-25(g) non-interchangeability.

S439 [SRC-00439] Copel Inc. (distributor catalogue). *Electrozad (Electrozad Supply Co. catalogue / price book, Copel Inc. 1985) - ITE-Siemens, Square D, Federal Pioneer distribution equipment sections (Canada)*. bwb_P9-BJG-737. 1985. Type: archive. URL: https://archive.org/details/bwb_P9-BJG-737 (accessed 2026-10-21) Status: paywalled. Note: archive.org lending item; djvu text download returns 401. Content read only through archive.org full-text-search highlight snippets (services/search/beta/page_production, service_backend=fts, query 'identifier:bwb_P9-BJG-737 AND <term>'). Canadian market products. No page numbers available from snippets except printed page numbers 401/402/409/410 for ITE-Siemens safety switch / CDP pages.

S440 [SRC-00440] Eaton. *Volume 12 - Aftermarket, Renewal Parts and Life Extension Solutions, Tab 4 Panelboards (pp. V12-T4-1 to V12-T4-22)*. CA08100014E. 2016-10. Type: oem_catalog. URL: https://marselectric.com/assets/9e/4b/9e4b96da-3475-4bb0-b01b-a25f2de09742/ID-BRO-v1-CA08100014E.pdf (accessed 2026-10-21) Note: Distributor-hosted (Mars Electric) copy of the full Volume 12. Tab 4 contains Product History, Product History Time Line, Original Cutler-Hammer Panelboard Breaker Replacement Chart (V12-T4-4/5), Plug-In Power Panelboards and Switchboards chart (EE/EP, V12-T4-6), Original Westinghouse chart (V12-T4-7/8), CDP/FDP layouts (T4-9/10), PB/PH/PH-L (T4-11), MP40 (T4-12), EE (T4-13), EP (T4-14), Further Information (T4-22). Earlier batches cited a different copy of CA08100014E but did not extract the Cutler-Hammer vintage pages.

S441 [SRC-00441] Eaton. *Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page*. 2010-06. Type: oem_web. URL: https://bidmanager.eaton.com/BidManager/Help/Sales/en-US/TakeOff_Help_Files/PNLAHelp/PNLAHelp/PNLAHelp.htm (accessed 2026-10-21) Note: Read via WebFetch. Describes CDP, FDP (Westinghouse), MP40 and MP100 (Cutler-Hammer) branch kits; MP40 kits also add devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards and NFB panelboards 26.5-36 in wide; FDP kits fit only 3.50 in phase spacing (not 4.25 in).

S442 [SRC-00442] Eaton. *Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40, MP-200, PB, PH, PH-L, EP, EE)*. RP01400003E. 2013-02. Type: oem_renewal_parts. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panel boards/eaton-vintage-cutler-hammer-swithboard-panelboard-rp01400003e-en-us.pdf (accessed 2026-10-21) Status: blocked. Local copy: docs/library/EAT/rp01400003e.pdf Note: eaton.com refused (HTTP/2 INTERNAL_ERROR, empty reply over HTTP/1.1; WebFetch 503). usermanual.wiki mirror (152612Attachmenturl.613627626.pdf) redirects to manuals.plus security check. web.archive.org unreachable from container. Search-engine snippets only: effective February 2013; retrofit kits = breaker + copper connectors (twin) + covers + brackets + hardware + instructions; kits from Sumter SC Aftermarket Center; all breakers in one 'B' space must be same family (EHD, F-frame, CC/CCH/CHH); trim locks for MP100, MP2, M50.

S443 [SRC-00443] Eaton. *Vintage Cutler-Hammer Panelboards and Switchboards Price List PL01400003E*. PL01400003E. 2008-01. Type: oem_catalog. URL: https://buy.wesco.com/static/catalog/products/images/PDF/EATON_pl01400003e.pdf (accessed 2026-10-21) Status: blocked. Note: Wesco copy returns HTTP 403 / HTML; carltonbates.com copy (https://carltonbates.com/static/catalog/products/images/PDF/EATON_pl01400003e.pdf) behind Cloudflare challenge. Search snippets: effective January 2008, supersedes February 2004; MP40 breaker retrofit kits also install in MP200 switchboards; covers trim locks, filler plates, deadfront kits, neutral assemblies, ground bars.

S444 [SRC-00444] Relectric (surplus/recertified dealer). *Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 items) and individual product detail pages*. Type: surplus. URL: https://www.relectric.com/breaker-parts-and-accessories/mounting-hardware (accessed 2026-10-21) Note: Listing fetched page=1..42; product 'Product Specifications' blocks (Panel Type / Breaker Types / Mounting / Amps Max) read from detail pages e.g. https://www.relectric.com/mp40kl400-3, /tb1dpk, /5eh2, /ml1kapt. Dealer data: compatibility max conf C.

S445 [SRC-00445] Superbreakers (surplus dealer). *Superbreakers - Mounting Kits, Panels & Accessories collection (Shopify products.json, 140 items)*. Type: surplus. URL: https://superbreakers.com/collections/mounting-kits-panels-accessories (accessed 2026-10-21) Note: Product body text for MP40ED2253, MP40KC2253, MP40KF1003, MP40KJ2253, MP40KK4003, MP40KL4003, MP40KM8003, MP40KN12003 and NHB150PK. Superbreakers writes the MP40 kits without the hyphen (e.g. MP40KL4003 = Relectric MP40KL400-3).

S446 [SRC-00446] Essential Electric (dealer; states it is not an authorized distributor). *Essential Electric - MPED1K Cutler Hammer 225A Dual Branch Panelboard Connector Kit 600V*. Type: surplus. URL: https://essentialparts.com/products/mped1k-cutler-hammer-225a-dual-branch-panelboard-connector-kit-600v?variant=62518414377119 (accessed 2026-10-21)

S447 [SRC-00447] McGraw-Hill / Electrical South. *Electrical Construction and Maintenance June 1958 / Electrical South June 1958 - Westinghouse installation story: 'More than 40 Westinghouse Panelboards (Type NLAB & Type CDP) provide for lighting and distribution'*. sim_ecm_1958-06_57_6; sim_electrical-south_1958-06_38_6. 1958-06. Type: archive. URL: https://archive.org/details/sim_ecm_1958-06_57_6 (accessed 2026-10-21) Note: Full-text-search snippet only.

S448 [SRC-00448] Technical Publishing (Westinghouse advertisement). *Plant Engineering Vol 14 No 4-6 (April-June 1960) - Westinghouse ad: flush-mounted type NLAB panelboard; 'Westinghouse Bus Duct and Panelboard Specialist inspect a type CDP convertible'*. sim_plant-engineering_1960-04_14_4. 1960-04. Type: archive. URL: https://archive.org/details/sim_plant-engineering_1960-04_14_4 (accessed 2026-10-21) Note: Full-text-search snippet; also says '*NBQ (plug-in) and NQOB (bolted connection) panelboards are also available' in a Square D ad in the same issue (OCR of NQO likely garbled to NBQ).

S449 [SRC-00449] Prentice-Hall (textbook). *Industrial Electrical Wiring: Design and Application (1987), section 'Type NQOB Panelboards' p.132-133*. industrialelectr0000earl. 1987. Type: archive. URL: https://archive.org/details/industrialelectr0000earl (accessed 2026-10-21) Status: paywalled. Note: Lending item; full-text-search snippets only: 'breakers are bolted in place in NQOB panelboards, rather than plugged into the busbars. NQOB panelboards are suitable ...'.

S450 [SRC-00450] McGraw-Hill (reference book). *Standard Application of Electrical Details (1984) - panel schedules showing 'NLAB 100 THQB 20' and TEB 70 3P main*. standardapplicat0000muel. 1984. Type: archive. URL: https://archive.org/details/standardapplicat0000muel (accessed 2026-10-21) Status: paywalled. Note: Lending item; full-text-search snippets only. Schedules pair 'NLAB' panels with GE THQB branch and TEB main breakers, corroborating a GE NLAB designation in addition to the Westinghouse NLAB.

S451 [SRC-00451] McGraw-Hill. *Electrical Construction and Maintenance, February 1959 - article text: 'Two of the panelboards are NLAB 120/240v, one is a NHIB 277/480v'*. sim_ecm_1959-02_58_2. 1959-02. Type: archive. URL: https://archive.org/details/sim_ecm_1959-02_58_2 (accessed 2026-10-21) Note: Full-text-search snippet; manufacturer not identified in snippet.

S452 [SRC-00452] General Electric Supply Corporation (GE subsidiary distributor). *Wiring Materials, Power Apparatus - General Electric Supply Corporation catalog (copyright 1951), pp. 441-448 'Trumbull Lighting Panelboards' (NAB, NLAB, NLTQ, NTP/NTC) and 'Trumbull Panelboards for Power Distribution' (Converti-Fuse, Swing-Wa, Convertible Circuit Breaker, Type ABH) and Trumbull switchboards*. wiringmaterialsp00unse. 1951. Type: archive. URL: https://archive.org/details/wiringmaterialsp00unse (accessed 2026-10-21) Note: Full djvu text downloaded (https://archive.org/download/wiringmaterialsp00unse/wiringmaterialsp00unse_djvu.txt); panelboard pages at text lines ~69790-71300. Product text authored for GE/Trumbull products; UL file E2366 cited for Trumbull NLTQ.

S453 [SRC-00453] General Electric. *GE Installation and Maintenance Instructions GEJ-3006A 'Circuit Breaker Panelboards' with renewal parts list GEG-13610B 'Types DB, NLTQ and NLAB Panelboards, Style 5' (Distribution Assemblies Department)*. GEJ-3006A / GEG-13610B. 1969-08. Type: oem_instruction. URL: https://archive.org/details/General_Electric_Circuit_Breaker_Panelboard_GEJ_3006A_ (accessed 2026-10-21) Status: paywalled. Note: archive.org item (access-restricted; djvu text returns 401). Content read through archive.org full-text-search highlight snippets (query identifier:General_Electric_Circuit_Breaker_Panelboard_GEJ_3006A_ AND <term>). Item date 1969, file name says 'August'. Part-number-to-description mapping inferred from OCR line order (description followed by catalog number); lug table column order is ambiguous.

S454 [SRC-00454] McGraw-Hill (Westinghouse advertisement / product news). *Electrical Construction and Maintenance, Vol 56 No 6, June 1957 - Westinghouse distribution panelboard advertisement (Type CDP and Type FDP ratings) and new-product note on GE Type TQLP/TQLA plug-in lighting and power panel*. sim_ecm_1957-06_56_6. 1957-06. Type: archive. URL: https://archive.org/details/sim_ecm_1957-06_56_6 (accessed 2026-10-21) Note: Full djvu text downloaded; Westinghouse ad pp.188-189; GE TQLA/TQLP news item.

S455 [SRC-00455] McGraw-Hill (FPE / Cutler-Hammer advertisements). *Electrical Construction and Maintenance, Vol 61 No 5, May 1962 - Federal Pacific Electric advertisement (NHDP and CDP distribution panelboards with rotary-handle breakers; HCB and VCB switchboards) and Cutler-Hammer advertisement listing divisions (AIL; Mullenbach)*. sim_ecm_1962-05_61_5. 1962-05. Type: archive. URL: https://archive.org/details/sim_ecm_1962-05_61_5 (accessed 2026-10-21) Note: Full djvu text downloaded. Also contains I-T-E 'New EQ-225 amp breaker' advertisement.

S456 [SRC-00456] Schneider Electric. *Schneider Electric FAQ FA130530 - MLN panelboards and replacement circuit breakers (MLN panelboards and switchboards sold in the USA 1962-1968)*. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA130530/ (accessed 2026-10-21) Note: Read via WebFetch (US page; CA page 403). Published 2010-06-02, modified 2026-04-22.

S457 [SRC-00457] Schneider Electric. *Schneider Electric FAQ FA233845 - Are NY1B panelboard replacement breakers still available?*. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA233845 (accessed 2026-10-21) Note: Read via WebFetch. Published 2015-02-25.

S458 [SRC-00458] Schneider Electric. *Schneider Electric FAQ FA96717 - What is the QSFB switch/fuse unit and is it available? (NQOB panelboards)*. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA96717/ (accessed 2026-10-21) Note: Read via WebFetch. Published 2002-08-13.

S459 [SRC-00459] Schneider Electric. *Schneider Electric FAQ group on NQO/NQOB, NEHB, NA1B, NY1B (FA97632, FA124608, FA232958, FA87904, FA100575, FA332061, FAQ000266417, FA129512, FA119163, FA122757, FA166748, FA121261, FA125651, FA128561) - content known only from search-engine result summaries*. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA97632/ (accessed 2026-10-21) Status: blocked. Note: All returned HTTP 403 to WebFetch and curl on 2026-10-21 after the first few fetches. Statements attributed to this group are search-engine summaries not mapped to an individual FAQ number; treat as conf C/D until each FAQ is read.

S460 [SRC-00460] Mike Holt Enterprises forum. *Mike Holt forum - 'Square D - Legacy Breaker Information' (ML line superseded by I-Line in the 1960s; ML breakers identified by side label part number 999xxx)*. Type: forum. URL: https://forums.mikeholt.com/threads/square-d-legacy-breaker-information.2588165/post-3009160 (accessed 2026-10-21) Note: Search-result summary only.

S461 [SRC-00461] McGraw-Hill / Technical Publishing (Trumbull Electric advertisements). *Electrical Wholesaling Oct 1953 / Plant Engineering Jul 1951 - Trumbull advertisements for NLTQ and NLTQX (column type) panelboards with plug-in TQL breakers (Bulletin TEB-14)*. sim_electrical-wholesaling_1953-10_34_10; sim_plant-engineering_1951-07_5_7. 1951-1953. Type: archive. URL: https://archive.org/details/sim_electrical-wholesaling_1953-10_34_10 (accessed 2026-10-21) Note: Full-text-search snippets: 'Trumbull's new NLTQ Panelboard introduces the first plug-in circuit breaker' (quick-make quick-break); 'NLTQ Panelboards incorporate plug-in type TQL breakers'; interiors readily removable.

S462 [SRC-00462] John Wiley (textbook reproducing GE data). *Electrical Wiring and Design: A Practical Approach (1983) - 'For designer's use (AV-Line switchboards)', publications list 'AV-Line Switchboards GEA-7931'*. electricalwiring0000star. 1983. Type: archive. URL: https://archive.org/details/electricalwiring0000star (accessed 2026-10-21) Status: paywalled. Note: Lending item; full-text-search snippet only.

S463 [SRC-00463] Square D Company. *Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution Panelboards section pp.55-86 (index p.55, NQO/NQOB pp.56-65, NA1B pp.66-67, NH1B p.68, I-Line pp.72-75, NTFB/NTHB p.76, QMB pp.78-83, accessories p.84, ordering/replacement p.85)*. Digest 152. 1970. Type: oem_catalog. URL: https://archive.org/details/squareddigest152 (accessed 2026-10-21) Note: Open archive.org item (folkscanomy_engineering). Full djvu text downloaded from https://archive.org/download/squareddigest152/Square%20D%20Digest%20152%20%281970%29_djvu.txt ; OCR has minor digit/letter errors (noted per claim). Panelboard section at text lines ~40200-65250.

S464 [SRC-00464] The Trademark Register (Washington DC). *The Trademark Register of the United States 1976 - entry 'POW-R-LINE - US 21 - 10-14-75 - 1,022,520'*. trademarkregiste0000vari_k3n0. 1976. Type: archive. URL: https://archive.org/details/trademarkregiste0000vari_k3n0 (accessed 2026-10-21) Status: paywalled. Note: Full-text-search snippet only; registrant not shown in snippet.

S465 [SRC-00465] Eaton. *SPD, Power Conditioning, PF Capacitors and Harmonic Filters - Volume 3 Power Distribution and Control Assemblies, Tab 2 (CA08100004E), October 2022*. CA08100004E. 2022-10. Type: oem_catalog. URL: http://cooperindustries.com/content/dam/eaton/products/backup-power-ups-surge-it-power-distribution/power-conditioners/harmonic-correction-unit/eaton-spd-power-conditioning-pf-capacitors-harmonic-filters-CA08100004E.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-spd-power-conditioning-pf-capacitors-harmonic-filters-CA08100004E.pdf Note: 94 pp. V3-T2-7..V3-T2-9: SPD Series for integration into electrical distribution equipment, catalog number selection (application code A = PRL1a/2a/3a/3E direct bus mounted; C = PRL1a-4, switchboards, busway via breaker).

S466 [SRC-00466] Siemens. *P1-250 Panelboard Kit MBKQJ1A & MBKQJ3A QJ Main/Subfeed Breaker Instructions (also P1-400 subfeed; Revised P1 only)*. 11-A-1112-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1112-01_MBKQJxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1112-01_MBKQJxA_Instructions.pdf

S467 [SRC-00467] Siemens. *P1-250 Panelboard Kit MBKQR1A & MBKQR3A for 225A MAX QR Main/Subfeed Breaker Installation Instructions (Revised P1 only)*. 11-A-1130-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1130-01_MBKQRxA.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1130-01_MBKQRxA.pdf Note: Same document also published as SIE_IS_MBKQR1A_MBKQR3A.pdf

S468 [SRC-00468] Siemens. *400A OEM Chassis Installation Instructions (Revised P1 panelboard configurations only)*. 11-A-1118-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1118-01_400A_OEM_Chassis_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1118-01_400A_OEM_Chassis_Instructions.pdf

S469 [SRC-00469] Siemens. *DFFPED01 / DFFPFD01 / DFFPQJ01 / DFFPQJ02 replacement filler plates for Siemens lighting panels*. 11-A-1181-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1181-01_DFFP_ED_FD_QJ.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1181-01_DFFP_ED_FD_QJ.pdf

S470 [SRC-00470] Siemens. *Instructions for drain holes in Type 3R/12 enclosures (WP260/275/290/860/875/890)*. 11-A-1062-01 Rev. 1 (label 11-1100-01 Rev. 6). Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1062-01_WP260-275-290-860-875-890.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1062-01_WP260-275-290-860-875-890.pdf

S471 [SRC-00471] Siemens. *Panelboard Box Installation Instructions (flush installations, 1-piece / 4-piece trim)*. 11-B-1010-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-B-1010-01_PB.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-B-1010-01_PB.pdf

S472 [SRC-00472] Siemens. *P1 / P2 / P3 Series Panelboard Box Installation for Seismic-Rated Panelboards*. 12-A-1066-01 Rev. 03. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SeismicPanelboard_P1-2-3.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SeismicPanelboard_P1-2-3.pdf

S473 [SRC-00473] Siemens. *CAT. NO. 6CLE2 instruction sheet: drawing 11-5068-00 Rev 2 'CED6 Breaker Mounting Series 6 Branch Bus', BOM 11-5068-05 Rev 3, Series 5 adaptor kit 11-5570-01*. 31-1153-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6CLE2.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6CLE2.pdf Note: Scanned drawing sheet; read visually

S474 [SRC-00474] Siemens. *CAT. NO. 6CLF1 instruction sheet: drawing 11-5383-00 Rev 5 'CFD6 Breaker Mounting Series 6 Branch Bus', BOM 11-5383-03 Rev 5, Series 5 adaptor kit 11-5570-02*. 31-1154-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6CLF1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6CLF1.pdf Note: Scanned; read visually

S475 [SRC-00475] Siemens. *CAT. NO. 6CLJ1 instruction sheet: drawing 12-5719 Rev 10 'CJD frame mount Series 6 - branch' + Series 5 adaptor kit 11-5570-02*. 31-1187-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6CLJ1_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6CLJ1_old.pdf Note: Scanned drawing; read visually. Same drawing's -02 assembly is used on strap kit SCJD (-02)

S476 [SRC-00476] Siemens. *CAT. NO. 6CLL1 instruction sheet: drawing 12-5720 Rev 11 'CLD frame mount Series 6 - branch' + Series 5 adaptor kit 11-5570-02*. 31-1189-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6CLL1_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6CLL1_old.pdf Note: Scanned drawing; read visually. Same drawing's -02 assembly is used on strap kit SCLD (-02)

S477 [SRC-00477] Siemens. *CAT. NO. 6SCJ1 instruction sheet: drawing 12-5771 Rev 8 'SCJD frame mount Series 6 - branch' + Series 5 adaptor kit 11-5570-02*. 31-1194-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6SCJ1_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6SCJ1_old.pdf Note: Scanned drawing; read visually. Same drawing's -02 assembly is used on strap kit SSCJD (-02)

S478 [SRC-00478] Siemens. *CAT. NO. 6SCL1 instruction sheet: drawing 12-5772 Rev 8 'SCLD frame mount Series 6 - branch' + Series 5 adaptor kit 11-5570-02*. 31-1195-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6SCL1_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6SCL1_old.pdf Note: Scanned drawing; read visually. Same drawing's -02 assembly is used on strap kit SSCLD (-02)

S479 [SRC-00479] Siemens. *CAT. NO. SSCJD instruction sheet (drawing 12-5771 Rev 8, -02 assembly)*. 31-1226-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SSCJD_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SSCJD_old.pdf Note: Scanned; read visually

S480 [SRC-00480] Siemens. *CAT. NO. SJ2D instruction sheet (drawing 12-5721 Rev 11 'JD frame twin mounting Series 6 branch', -02 assembly)*. 31-1223-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SJ2D_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SJ2D_old.pdf Note: Scanned; read visually; also SIE_IS_Panelboard_31-1223-01_SJ2D.pdf

S481 [SRC-00481] Siemens. *CAT. NO. SSCJ instruction sheet: drawing 12-B-2012-00 Rev 4 'SCJD6 mounting branch bus', BOM 12-B-2012-03 Rev 5 'SCJD6 branch breaker S4 mounting - copper bus'*. 31-1209-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SSCJ_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SSCJ_old.pdf Note: Scanned; read visually; duplicate file SIE_IS_Panelboard_31-1209-01_SSCJ.pdf

S482 [SRC-00482] Siemens. *CAT. NO. VB6150 instruction sheet: drawing 11-5075-00 Rev 3 'Vacu-Break Mounting Series 6 Branch Bus Kit 15in Single Unit', BOM 11-5075-02 Rev 4*. 31-1159-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_VB6150_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_VB6150_old.pdf Note: Scanned; read visually

S483 [SRC-00483] Siemens. *CAT. NO. VB657 instruction sheet: drawing 11-5073-00 Rev 7 'Vacu-Break Mounting Series 6 Branch Bus Kit 5in & 7.500in Twin Unit', BOM 11-5073-03 Rev 4*. 31-1157-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_VB657_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_VB657_old.pdf Note: Scanned; read visually

S484 [SRC-00484] Siemens. *CAT. NO. VB671 instruction sheet: drawing 11-5074-00 Rev 5 'Vacu-Break Mounting Series 6 Branch Bus Kit 7.500 & 10.000 Single Unit', BOM 11-5074-04 Rev 4 'Vacu-Break mounting 200A Series 6 copper branch bus'*. 31-1158-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_VB671_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_VB671_old.pdf Note: Scanned; read visually; also SIE_IS_VB671-InstDims.pdf (image)

S485 [SRC-00485] Siemens. *Series 5, Series 6, FC-I and FC-II Distribution VB610 Twin 200A Vacu-Break Mounting Kit Installation Instructions*. 12-B-2018-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_VB610.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_VB610.pdf Note: Scanned; read visually

S486 [SRC-00486] Siemens. *F1 10in Deep FPP F672 Twin 200A Vacu-Break Mounting Kit Installation Instructions*. 12-B-2016-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_F672.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_F672.pdf Note: Scanned; duplicate SIE_IS_Panelboard_12-B-2016-01_F672.pdf

S487 [SRC-00487] Siemens. *F2 12.75in Deep FPP F672D Twin 200A Vacu-Break Mounting Kit Installation Instructions*. 12-B-2017-01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_F672D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_F672D.pdf Note: Scanned; doc number from duplicate filename SIE_IS_Panelboard_12-B-2017-01_F672D.pdf

S488 [SRC-00488] Siemens. *CAT. NO. F6150D instruction sheet: drawing 11-B-2007-00 Rev 2 'Vacu-Break mounting F2 branch bus kit 15in single unit', BOM 11-B-2007-02 Rev 3*. 31-1243-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_F6150D_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_F6150D_old.pdf Note: Scanned; read visually

S489 [SRC-00489] Siemens. *Panel Kit 800/1200A Sentron HCP Switch Catalog No. F6162D Installation Instructions*. 12-B-2108-01 Rev. 0 (p.2 Rev. 1). Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_12-B-2108-01_F6162D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_12-B-2108-01_F6162D.pdf Note: Scanned; read visually

S490 [SRC-00490] Siemens. *Cat. No. F6162D connection strap kit - Horizontal Mount Drawing / Group Mounting Assembly (Horizontal Mount Only)*. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_F6162_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_F6162_old.pdf Note: Vector drawing whose text layer uses a reversed-codepoint font (decoded: char = 0x120 - code); no document number visible

S491 [SRC-00491] Siemens. *Power Panel Kit (P5) SMSKHCP for Main Mounting Type SENTRON HCP Switch Installation Instructions*. 11-D-1023-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SMSKHCPP.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SMSKHCPP.pdf

S492 [SRC-00492] Siemens. *Switchboard/Powerpanel Kit SQJD/6QJ2/SQJ for Branch Mounting Type QJ Breakers Installation Instructions*. 11-B-1011-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6QJ2.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6QJ2.pdf Note: Scanned; read visually; same document as SIE_IS_SQJ_SQJD.pdf

S493 [SRC-00493] Siemens. *Switchboard/Powerpanel Kit SMND for Branch Mounting Type MD/ND Breakers Installation Instructions*. 11-B-1017-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-B-1017-01_SMND_SSMND.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-B-1017-01_SMND_SSMND.pdf Note: Scanned (pages rotated); read visually. Companion file SIE_IS_SMND_SSMND.pdf is a corrupt PDF (no renderable content).

S494 [SRC-00494] Siemens. *Switchboard/Power Panel Kit NG1D for Branch Mounting Type VL N Frame Breakers Installation Instructions*. 11-B-1018-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_NG1D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_NG1D.pdf Note: Also SIE_IS_Panelboard_11-B-1018-01_NG1D.pdf (image version)

S495 [SRC-00495] Siemens. *Distribution Panel Kit SJ1/SSJ1/SL6/SSL6 for Branch Mounting Type JD/SJD/LD/SLD Breakers Installation Instructions (shallow panelboards)*. 11-B-1015-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-B-1015-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-B-1015-01.pdf Note: Scanned (rotated pages); read visually; same document as SIE_IS_SSJ1_SJ1_SL6_SSL6P.pdf

S496 [SRC-00496] Siemens. *TA1E6125 Lug Kit instructions (E, ED, EF & EM frame)*. Pc. No. 64900A02. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ED_110-125A-Li-Lo-Term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ED_110-125A-Li-Lo-Term.pdf

S497 [SRC-00497] Siemens. *SA1-E025 Wire Grip Kit instructions (E, EF, ED & EM frame)*. Pc. No. 73937A02. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ED_15-25A-LiLo-End-Term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ED_15-25A-LiLo-End-Term.pdf

S498 [SRC-00498] Siemens. *LD1-E060 Load Side Lug Kit instructions (I-T-E E, ED & EF)*. Pc. No. 62992A01. 1987. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ED_1P-30-60A-Load-End-Term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ED_1P-30-60A-Load-End-Term.pdf

S499 [SRC-00499] Siemens. *LN1-E100 Lug Kit (30-100 A) instructions (E, ED & EF frame)*. Pc. No. 73935A01. 1987. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ED_30-100A-LiLo-End-Term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ED_30-100A-LiLo-End-Term.pdf

S500 [SRC-00500] Siemens. *LD1-E100 Load Side Lug Kit instructions (I-T-E E, ED & EF)*. Pc. No. 61538A01. 1987. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ED_70-100A-LoadEnd-Term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ED_70-100A-LoadEnd-Term.pdf

S501 [SRC-00501] Siemens. *CCE 125 compression lug instructions*. Pc. No. 82689A01. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ED_Compression-lug.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ED_Compression-lug.pdf

S502 [SRC-00502] Siemens. *MSE6-100 Breaker Mounting Screws instructions (E & ED frame)*. Pc. No. 62843A01. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ED_Mounting-screw-kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ED_Mounting-screw-kit.pdf

S503 [SRC-00503] Siemens. *Instruction Sheet for Rear Connecting Stud for E-Frame Breaker (RS2641, RS2642, RS2643, RS2644)*. Pc. No. 59624A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ED_Rear-Connecting-Stud.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ED_Rear-Connecting-Stud.pdf

S504 [SRC-00504] Siemens. *Plug-in mounting assemblies and adapters for 'E' & 'CLE' frame breakers (PC2637, PC2638, PC2657, PC2658, PM2657, PM2658)*. Pc. No. 60303A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ED_Plug-in-mount-assemb.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ED_Plug-in-mount-assemb.pdf

S505 [SRC-00505] Siemens. *Replacement plug-in adapters for 'E' & 'CLE' frame breakers (TCE2, TCE3)*. Pc. No. 410901A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ED_Replace-Plug-in-Studs.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ED_Replace-Plug-in-Studs.pdf

S506 [SRC-00506] Siemens. *TA6FD04 Special Purpose Wire Connector instructions (FD frame Sentron)*. Pc. No. 411755A00. 2003. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_FD_Distribution-Lug.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_FD_Distribution-Lug.pdf

S507 [SRC-00507] Siemens. *TA1FD350A Wire Grip Kit instructions*. Pc. No. 410211A05. 2010. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_FD_Li-Lo-Term-Conn-AL.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_FD_Li-Lo-Term-Conn-AL.pdf

S508 [SRC-00508] Siemens. *TC1FD350 Wire Grip Kit instructions (F, FD, FF & FM frame)*. Pc. No. 410211B03. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_FD_LiLo-Term-Conn-CU.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_FD_LiLo-Term-Conn-CU.pdf

S509 [SRC-00509] Siemens. *MSF6-50 Breaker Mounting Screws instructions (FD and FM frame)*. Pc. No. 62980B02. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_FD_Mounting-Screw-Kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_FD_Mounting-Screw-Kit.pdf

S510 [SRC-00510] Siemens. *Instructions for Installation of Circuit Breaker Rear Connecting Studs RS4755 and RS4756 (I-T-E F, FD, FF)*. Pc. No. 60171A00. 1989. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_FD_Rear-Connecting-Term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_FD_Rear-Connecting-Term.pdf

S511 [SRC-00511] Siemens. *CCF 250 compression lug instructions*. Pc. No. 82691A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_FD_Compression-Lug.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_FD_Compression-Lug.pdf

S512 [SRC-00512] Siemens. *Plug-in mounting assemblies for F, FD, FM and FF frame (PC4753, PC4754, PM4754)*. Pc. No. 60121A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_FD_Plug-in-Mount-Kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_FD_Plug-in-Mount-Kit.pdf

S513 [SRC-00513] Siemens. *Replacement plug-in tulip adapters TCF2 / TCF3 for FD frame*. Pc. No. 410902A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_FD_Plug-in-Tulip-Assembly.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_FD_Plug-in-Tulip-Assembly.pdf

S514 [SRC-00514] Siemens. *TA6JD20 Distribution Lug Kit instructions (JD, LD, JXD, LXD, JM, LM)*. Pc. No. 411776A00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JD-LD_Distribution-Lug.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JD-LD_Distribution-Lug.pdf

S515 [SRC-00515] Siemens. *TA2-J6500T10 two-cavity connector with voltage tap instructions*. Pc. No. 69991A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JD-LD_2Cavity-Lug-withVT.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/SIE_IS_JD-LD_2Cavity-Lug-withVT.pdf

S516 [SRC-00516] Siemens. *MSJ6 Mounting Kit instructions (I-T-E JXD, LXD, JM and LM)*. Pc. No. 66456A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JD-LD_MountingScrew-Kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JD-LD_MountingScrew-Kit.pdf

S517 [SRC-00517] Siemens. *TA1-L6750 connector instructions*. Pc. No. 63306C02. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JD-LM_1Cavity-Al-Connect.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JD-LM_1Cavity-Al-Connect.pdf

S518 [SRC-00518] Siemens. *TC1-J6600 connector instructions*. Pc. No. 63306B02. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JD-LM_1Cavity-Cu-Connect.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JD-LM_1Cavity-Cu-Connect.pdf

S519 [SRC-00519] Siemens. *TA2-J6500 Wire Grip Kit instructions*. Pc. No. 69796A04. 2010. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JD-LM_2Cavity-Al-Connect.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JD-LM_2Cavity-Al-Connect.pdf

S520 [SRC-00520] Siemens. *TC2-J6500 connector instructions*. Pc. No. 63306A02. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JD-LM_2Cavity-Cu-Connect.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JD-LM_2Cavity-Cu-Connect.pdf

S521 [SRC-00521] Siemens. *CCL 600 compression connector instructions*. Pc. No. 82692A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JD-LM_Compression-Conn.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JD-LM_Compression-Conn.pdf

S522 [SRC-00522] Siemens. *Rear Connecting Studs Cat. No. RS5773, RS5774, RS5783, RS5784 instructions*. Pc. No. 61442A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JD-LD_RearConnect-Term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JD-LD_RearConnect-Term.pdf

S523 [SRC-00523] Siemens. *Plug in Adapters Cat. No. PC5777, PC5778, PC5660 and PC5661 instructions (JD/LD frame)*. Pc. No. 61423A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JD-LD-Fr_Plug-in-Mount-Kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JD-LD-Fr_Plug-in-Mount-Kit.pdf

S524 [SRC-00524] Siemens. *TCJ2, TCJ3 Plug-In Adapters instructions (JD/LD/JF/LF)*. Pc. No. 410903A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JD-LD_Plugin-Replace-Stud.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JD-LD_Plugin-Replace-Stud.pdf

S525 [SRC-00525] Siemens. *Rear Connecting Studs Cat. No. RS5787, RS5788 instructions (LMD frame)*. Pc. No. 800818A01. 1994. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LMD_Rear-Connect-Stud.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LMD_Rear-Connect-Stud.pdf

S526 [SRC-00526] Siemens. *Panelboard Connector Straps Cat. No. CS3637R, CS3638R, CS3639R instructions (MD & ND frame)*. Pc. No. 77942 Rev. 0P. 1989. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MD-ND_PanelBoard-Straps.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MD-ND_PanelBoard-Straps.pdf

S527 [SRC-00527] Siemens. *Pressure Wire Connectors (TA2K500, TA3K350, TC2K500, TC3K350, TA3K500, TA2N750) instructions*. Pc. No. 99460A04. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MD-ND_Al-CU-Terminal-Lugs.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MD-ND_Al-CU-Terminal-Lugs.pdf

S528 [SRC-00528] Siemens. *Pressure Wire Connectors for MD, ND, MF, NF, MM & NM (TA4P8500, TA4N8500, TA2K8750, TA2N8750, TA3P8750, TA3N8750, TA4H500)*. Pc. No. 83439A04. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MD-ND_Pressure-Connect.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MD-ND_Pressure-Connect.pdf

S529 [SRC-00529] Siemens. *Wire Connector Shield #NDTS instructions (MD, ND, MM & NM)*. Pc. No. 83445A00. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MD-ND_Term-End-Shield.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MD-ND_Term-End-Shield.pdf

S530 [SRC-00530] Siemens. *Rear connecting straps Cat. No. RS5785 & RS5786 instructions (I-T-E MD, ND, MF & NF)*. Pc. No. 77933A00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MD-ND_Rear-Connect-Straps.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MD-ND_Rear-Connect-Straps.pdf

S531 [SRC-00531] Siemens. *CCM800 Series A, CCM800K2, CCM800K3 compression connector instructions*. Pc. No. 82693A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MD_Compression-Connect.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MD_Compression-Connect.pdf

S532 [SRC-00532] Siemens. *Plug-in Adaptors Cat. No. PC5664, PC5665, PC5666, PC5667 and PM5666 (MD, ND, MF, MM, NM & NF)*. Pc. No. 76682A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MD-ND_Plug-in-Assembly.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MD-ND_Plug-in-Assembly.pdf

S533 [SRC-00533] Siemens. *Plug-in Adaptors Cat. No. PC5662, PC5663 and PM5663 (MD, MM & MF frame)*. Pc. No. 760777A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MD_Plugin-Assembly.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MD_Plugin-Assembly.pdf

S534 [SRC-00534] Siemens. *TCM2, TCM3 Plug-In Adapters instructions (MD, MM & MF frame)*. Pc. No. 410904A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MD_Plugin-Replace-Stud.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MD_Plugin-Replace-Stud.pdf

S535 [SRC-00535] Siemens. *TCN2, TCN3 Plug-In Adapters instructions (MD, ND, MM, NM, MF & NF)*. Pc. No. 410905A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ND_Plugin-Replace-Stud.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ND_Plugin-Replace-Stud.pdf

S536 [SRC-00536] Siemens. *Cat. No. TC5R600 Pressure Wire Connector instructions (I-T-E PD, PM, RD)*. Pc. No. 83614A01. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_PD-RD_5Cavity-CU-WireConn.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_PD-RD_5Cavity-CU-WireConn.pdf

S537 [SRC-00537] Siemens. *Cat. No. TA6R600 Pressure Wire Connector instructions (PD, PM, RD)*. Pc. No. 83623A02. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_PD-RD_6Cavity-AL-WireConn.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_PD-RD_6Cavity-AL-WireConn.pdf

S538 [SRC-00538] Siemens. *Connect-All Mounting Block Assemblies Cat. No. MB9301 (PD), MBR9302 (RD), MM9301 and MM9302 (PM) instructions*. Pc. No. 73632A00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_PD-RD_MountingBlock-Assem.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_PD-RD_MountingBlock-Assem.pdf

S539 [SRC-00539] Siemens. *Wire Connector Shield #PRDBS1 instructions (PD frame)*. Pc. No. 411757A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_PD_Term-End-Shield.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_PD_Term-End-Shield.pdf

S540 [SRC-00540] Siemens. *Cat. No. TA1Q300 terminal lug instructions (QJ, QJ2, QJH2)*. Pc. No. 61936A01. 1988. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_QJ-1Cavity-AL-Terminal-Lug.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_QJ-1Cavity-AL-Terminal-Lug.pdf

S541 [SRC-00541] Siemens. *CCQ250 compression lugs instructions (Frame QR)*. I.L. No. 814533A. 2015. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_CCQ250_CompressionLugs.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_CCQ250_CompressionLugs.pdf

S542 [SRC-00542] Siemens. *3TA1QR300 / 3TC1QR250 / TA1QR300 / TC1QR250 Wire Connector instructions (Frame QR)*. I.L. No. 814532A. 2015. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_QR_WireConnector.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_QR_WireConnector.pdf

S543 [SRC-00543] Siemens. *MSQR3 Mounting Screw Kit instructions (QR)*. I.L. No. 814517A. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MountingScrew_QR_MSQR3.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MountingScrew_QR_MSQR3.pdf

S544 [SRC-00544] Siemens. *Screw Mounting Kit CQDSMK for CQD breakers*. Pc. No. 800496G00 Rev. 5P. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_CQD_Mounting-Screw-Kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_CQD_Mounting-Screw-Kit.pdf

S545 [SRC-00545] Siemens. *Face Mounting Bracket kits CQDFMB1 / CQDFMB2 / CQDFMB3 for CQD circuit breakers*. Pc. No. 800496D00 / 800496E00 / 800496F00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_CQD-1pole-FaceMountingPlate.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_CQD-1pole-FaceMountingPlate.pdf Note: Also SIE_IS_CQD-2Pole-FaceMountingPlate.pdf and SIE_IS_CQD-3pole-FaceMountingPlate.pdf; read visually

S546 [SRC-00546] Siemens. *Face mounting plate FMPG1 / FMPG2 / FMPG3 for NGG & CQD*. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_CQD-NGG_Face-Mount-Plate.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_CQD-NGG_Face-Mount-Plate.pdf Note: Scanned; read visually (doc no. not legible at preview resolution)

S547 [SRC-00547] Siemens. *NGG mounting kit (4) #6-32 UNC screws*. Pc. No. 806632A01 Rev. 1P. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_NGG_Mounting-Screw-Kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_NGG_Mounting-Screw-Kit.pdf

S548 [SRC-00548] Siemens. *TA6GG04 power distribution connector instructions (Frame NGG)*. I.L. No. 809802A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_NGG_PowerDistrib-Conn.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_NGG_PowerDistrib-Conn.pdf

S549 [SRC-00549] Siemens. *3TC1Q1 Lug Kit (for use with NGG)*. Pc. No. 806633A01 Rev. 1P. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MCCB_NGG_3TC1Q1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MCCB_NGG_3TC1Q1.pdf

S550 [SRC-00550] Siemens. *TSSG3A terminal end shield, 3-pole (CQD / NGG / NGB)*. I.L. No. 806579A01. 2006. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_CQD-NGG-NGB_TerminalEndShield.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_CQD-NGG-NGB_TerminalEndShield.pdf

S551 [SRC-00551] Siemens. *Interphase Barrier for Frame CG, DG, FG (3VL9300-8CE01 / IPBF4 3VL9300-8CE41)*. I.L. No. 806886A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_CG-FG_Interphase-Barrier.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_CG-FG_Interphase-Barrier.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S552 [SRC-00552] Siemens. *Interphase Barrier for Frame JG, LG, MG (3VL9600-8CE01 / IPBM4 3VL9600-8CE41)*. I.L. No. 806887A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JG-MG_Interphase-Barrier.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JG-MG_Interphase-Barrier.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S553 [SRC-00553] Siemens. *Interphase Barrier for Frame NG, PG (3VL9800-8CE01 / IPBP4 3VL9800-8CE41)*. I.L. No. 806888A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_NG-PG_Interphase-Barrier.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_NG-PG_Interphase-Barrier.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S554 [SRC-00554] Siemens. *Terminal Covers for Frame CG, DG, FG (TSLF3/TSLF4, 3VL9300-8CB31/41)*. I.L. No. 806883A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_CG-FG_Terminal-cover.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_CG-FG_Terminal-cover.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S555 [SRC-00555] Siemens. *Terminal Shield for Frame JG-MG (TSLL/TSSL/TSLM/TSSM)*. I.L. No. 806884A04. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JG-MG_Terminal-cover.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JG-MG_Terminal-cover.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S556 [SRC-00556] Siemens. *Rear Studs / Rear Terminals for Frame DG, FG*. I.L. No. 806866A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_DG-FG_Rear-Conn-Term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_DG-FG_Rear-Conn-Term.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S557 [SRC-00557] Siemens. *Rear Terminals for Frame JG, LG*. I.L. No. 806867A03. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JG-LG_Rear-Conn-Term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JG-LG_Rear-Conn-Term.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S558 [SRC-00558] Siemens. *Rear Terminals for Frame MG, NG*. I.L. No. 806869A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MG-NG_Rear-Conn-Term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MG-NG_Rear-Conn-Term.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S559 [SRC-00559] Siemens. *Rear Terminals for Frame NG*. I.L. No. 806870A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_NG_Rear-Conn-Term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_NG_Rear-Conn-Term.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S560 [SRC-00560] Siemens. *Front Busbar Connection for Frame DG, FG, JG, LG (FBCD/FBCF/FBCJ/FBCL)*. I.L. No. 806863A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_DG-LG_Front-Bus-Bar-Conn.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_DG-LG_Front-Bus-Bar-Conn.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S561 [SRC-00561] Siemens. *Power Distribution Connectors for Frame DG, FG (TA3DG02, TA6DG04, TA3FG20, TA6FG04)*. I.L. No. 806940A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_DG-FG_Power-Distrib-Conn.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_DG-FG_Power-Distrib-Conn.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S562 [SRC-00562] Siemens. *Power Distribution Connectors for Frame JG (TA6JG20, TA12JG04)*. I.L. No. 806941A03. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JG_Power-Distrib-Conn.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JG_Power-Distrib-Conn.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S563 [SRC-00563] Siemens. *Wrap-around terminals for Frame DG (TW1DG20, TA1DG30, TC1DG30 families)*. I.L. No. 806871A03. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_DG_Wrap-around-term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_DG_Wrap-around-term.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S564 [SRC-00564] Siemens. *Wrap-around terminals / lugs for Frame FG (TW1FG350, TAW1FG350, TCW1FG350)*. I.L. No. 806872A03. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_FG_Wrap-around-term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_FG_Wrap-around-term.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S565 [SRC-00565] Siemens. *Wrap-around terminals for Frame JG (TW1JG600)*. I.L. No. . Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JG_Wrap-around-term.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JG_Wrap-around-term.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S566 [SRC-00566] Siemens. *Wrap-around terminal for CG (3TW1CG20, 3TA1CG30)*. I.L. No. . Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_WRAP-TERMINAL.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_WRAP-TERMINAL.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S567 [SRC-00567] Siemens. *Terminal Al/Cu connectors for Frame NG (TA3NG750, TA4NG500 families)*. I.L. No. 806877A04. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_NG_Terminal-AL-CU-Conn.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_NG_Terminal-AL-CU-Conn.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S568 [SRC-00568] Siemens. *Compression lugs for Frame NG (12CLN500 3VL9750-4TM31)*. I.L. No. 806856A03. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_NG_Compression-lugs.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_NG_Compression-lugs.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S569 [SRC-00569] Siemens. *Breaker Mounting Base for Frame PG (MBPG1600, MBPG1601, TA4P750)*. I.L. No. 806952A02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_PG_Brkr-Mounting-Base.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_PG_Brkr-Mounting-Base.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S570 [SRC-00570] Siemens. *Lug Mounting Assembly / Terminal Al connector for Frame PG (LMAP1600, TA6PG750)*. I.L. No. 806951A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_PG_Lug-MountingAssemb.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_PG_Lug-MountingAssemb.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S571 [SRC-00571] Siemens. *Terminal Al connector for Frame PG (TA6PG750, 3TA6PG750, LMAP1600)*. I.L. No. 806875A03. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_PG_Terminal-AL-Conn.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_PG_Terminal-AL-Conn.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S572 [SRC-00572] Siemens. *Mounting Screw Kit MSKM4 3VL9600-8SB41 for MG-PG*. I.L. No. 806903A03. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MG-PG_Mounting-Screw-Kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MG-PG_Mounting-Screw-Kit.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S573 [SRC-00573] Siemens. *Plug-in Mounting Base for Frame DG, FG (PCBD*/PCBF*/PCXD*/PCXF*)*. I.L. No. 806847A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_DG-FG_Plug-in-mount.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_DG-FG_Plug-in-mount.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S574 [SRC-00574] Siemens. *Plug-in Mounting Base for Frame JG, LG*. I.L. No. 806848A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_JG-LG_Plug-in-mount.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_JG-LG_Plug-in-mount.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S575 [SRC-00575] Siemens. *Plug-in Mounting Base for Frame MG*. I.L. No. 806890A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MG_Plug-in-mount.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MG_Plug-in-mount.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S576 [SRC-00576] Siemens. *Plug-in Mounting Base for Frame NG*. I.L. No. 806846A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_NG_Plug-in-mount.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_NG_Plug-in-mount.pdf Note: Siemens/SEA multilingual accessory instruction for Sentron VL breakers; US catalog no. shown with 3VL MLFB

S577 [SRC-00577] Siemens. *Blue Pennant Switchboard Installation Instructions - Lug Landing Kit Catalog No. PLL44, PLL46 and PLL48*. 12-C-1010-01 Rev. 6. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Blue_Pennant_Lug_12-C-1010-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Blue_Pennant_Lug_12-C-1010-01.pdf Note: Scanned; read visually

S578 [SRC-00578] Siemens. *TA6ED06 Distribution Lug Kit instructions (E, ED & EM frame)*. Pc. No. 411777A01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ED_Distribution-lug.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ED_Distribution-lug.pdf Note: Scanned; read visually

S579 [SRC-00579] Siemens. *CCN1200 Series A, CCN1200K2, CCN1200K3 compression lug instructions (ND frame)*. Pc. No. 82694A00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_ND_CompressionConnectors.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_ND_CompressionConnectors.pdf Note: Scanned; read visually

S580 [SRC-00580] Siemens. *Cat. No. TA5P600, TA4P750 Pressure Wire Connectors (PD and PM frame)*. Pc. No. 110871A02. 2000. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_PD_4Cavity-AL-WireConn.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_PD_4Cavity-AL-WireConn.pdf Note: Scanned; read visually

S581 [SRC-00581] Siemens. *Cat. No. TCIQ250 connector instructions (QJ, QJ2, QJH2, QJ2-H, HQJ2H)*. Pc. No. 62152A00. 1986. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_QJ_1Cavity-CU-Terminal-Lug.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_QJ_1Cavity-CU-Terminal-Lug.pdf Note: Scanned hand-lettered sheet; read visually

S582 [SRC-00582] Siemens. *CCQ 225 compression lug instructions (QJ2, QJH2, QJ2-H)*. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_QJ_Compression-Lug.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_QJ_Compression-Lug.pdf Note: Scanned; read visually

S583 [SRC-00583] Siemens. *Power Mod Modular Metering Lug Kits LK12500 and LK32500 installation instructions*. P/N 48100004 0101 Rev.B. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LK12500-LK32500.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LK12500-LK32500.pdf

S584 [SRC-00584] Siemens. *Power Mod Modular Metering Lug Kits LK11750 and LK31750 installation instructions*. P/N 48100007 0101 Rev.B. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LK11750-LK31750.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LK11750-LK31750.pdf

S585 [SRC-00585] Siemens. *Power Mod Modular Metering Lug Kits LK13500 and LK33500 installation instructions*. P/N 48100005 0101 Rev.B. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LK13500-LK33500.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LK13500-LK33500.pdf

S586 [SRC-00586] Siemens. *Power Mod Modular Metering Lug Kits LK13750 and LK33750 installation instructions*. P/N 48100008 0101 Rev.B. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LK13750-LK33750.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LK13750-LK33750.pdf

S587 [SRC-00587] Siemens. *Power Mod Modular Metering Lug Kits LK14500 and LK34500 installation instructions*. P/N 48100006 0101 Rev.B. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LK14500-LK34500.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LK14500-LK34500.pdf

S588 [SRC-00588] Siemens. *Installation Instructions for Power Mod Modular Metering Lug Kits (LK1xxxxN2 / LK3xxxxN2 table)*. P/N 48100001 0101 Rev.B. 2009. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_NEMALugKit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_NEMALugKit.pdf

S589 [SRC-00589] Siemens. *SPEEDFAX 2011 Product Catalog, Section 13 Switchboards - Stock Service Entrance Switchboards (Super Blue Pennant) and Switchboard Replacement Parts and Modification Kits, pp.13-11 to 13-20 (distributor extract)*. SPEEDFAX 2011 pp.13-11..13-20. 2011. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_93254_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/USESI_93254_catalog.pdf Note: 10-page extract of SPEEDFAX 2011 Section 13 hosted by US Electrical Services (USESI_93254_catalog.pdf). p.13-20 is the 'Connection Strap Kits' table referenced by SPEEDFAX Sec.11 as 'page 12-32' in other editions.

S590 [SRC-00590] Schneider Electric (Square D). *Fingersafe IP2X per IEC 60529 Barriers for NQ Panelboards (Data Bulletin)*. 1640BR1701. Type: oem_bulletin. URL: https://download.schneider-electric.com/files?p_Doc_Ref=1640BR1701 (accessed 2026-10-21) Local copy: docs/library/SQD/1640BR1701.pdf Note: Downloaded in B0003 but never linked; contains 'Replacement parts' table (catalog number / qty per package / description).

S591 [SRC-00591] Schneider Electric (Square D). *Replacement Part QOFSBF for Fingersafe Covers IP2X per IEC 60529*. 80043-817-01. 2015-11. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-817-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-817-01.pdf

S592 [SRC-00592] Schneider Electric (Square D). *Replacement parts QOFSLALB and QOFSHALB for Fingersafe Covers IP2X per IEC 60529*. 80043-818-01. 2015-11. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-818-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-818-01.pdf

S593 [SRC-00593] Schneider Electric (Square D). *Replacement parts NQHJQLLC and NQLALLC for Fingersafe Covers IP2X per IEC 60529*. 80043-820-01. 2015-11. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-820-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-820-01.pdf

S594 [SRC-00594] Schneider Electric (Square D). *Replacement parts NQHJLSC, NQQLSC, NQLALHLSC and NQMLLSC for Fingersafe Covers IP2X per IEC 60529*. 80043-822-01. 2015-11. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-822-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-822-01.pdf

S595 [SRC-00595] Schneider Electric (Square D). *Replacement part NQNCC for Fingersafe Covers IP2X per IEC 60529*. 80043-826-01. 2015-11. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-826-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-826-01.pdf

S596 [SRC-00596] Schneider Electric (Square D). *Current Transformer Neutral Bonding Installation in I-Line Panelboards, Class 2110*. 80043-706-02. 2013-03. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-706-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-706-02.pdf

S597 [SRC-00597] Schneider Electric (Square D). *I-Line Panelboards - Current Transformer Neutral Bonding Installation, Rev. 02*. 80043-789-01. 2013-03. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-789-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-789-01.pdf

S598 [SRC-00598] Schneider Electric (Square D). *Quarter-turn Fasteners Kit Installation onto an NQ, NF, or I-Line Panelboard Enclosure (Classes 1640, 1670, 2110)*. 80043-772-01. 2009-04. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-772-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-772-01.pdf Note: Replaces 80043-450-03 (08/2007).

S599 [SRC-00599] Schneider Electric (Square D). *Endwall and Closing Plate Kit Installation onto an NQ or NF Panelboard Enclosure (Classes 1640, 1670)*. 80043-773-01. 2009-04. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-773-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-773-01.pdf Note: Replaces 80043-678-02 (08/2007).

S600 [SRC-00600] Schneider Electric (Square D). *MH Weatherproof Enclosure Installation (Classes 1630 NQOD, 1640 NQ, 1660 NEHB, 1670 NF)*. 80043-455-04. 2007-10. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-455-04 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-455-04.pdf Note: Replaces 80043-455-03 (03/2001); superseded by 80043-771-01.

S601 [SRC-00601] Schneider Electric (Square D). *MH Weatherproof Enclosure - Installation with an NQ or NF Panelboard*. 80043-771-01. 2009-03. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-771-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-771-01.pdf Note: Replaces 80043-455-04.

S602 [SRC-00602] Schneider Electric (Square D). *MH Vented NEMA 3R Weatherproof Enclosure, Class 1640 and 1670*. 80043-850-01. 2020-08. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-850-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-850-01.pdf

S603 [SRC-00603] Schneider Electric (Square D). *Type MH WP NEMA 4 / 4X Enclosures for NF or NQ Lighting Panelboards, Rev. 02*. 80043-252-04. 2024-08. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-252-04 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-252-04.pdf

S604 [SRC-00604] Schneider Electric (Square D). *I-Line HCP Trim Kit (Class 2110, Type HCP)*. 80043-660-04. 2006-05. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-660-04 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-660-04.pdf Note: Replaces 80043-660-03 (12/2003); written for HCP5486-8SU panelboard.

S605 [SRC-00605] Schneider Electric (Square D). *I-LINE 4-Piece Trim and Door Kits (HCP, HCR, HCW, HCWM, 42 in)*. 80043-616-03. 2001-07. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-616-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-616-03.pdf Note: Replaces 80043-616-02 (09/99).

S606 [SRC-00606] Schneider Electric (Square D). *I-Line 4-Piece Trim and Door Kits (HCN/HCM/HCP/HCR/HCW/HCWM)*. 80043-449-03. 2003-09. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-449-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-449-03.pdf

S607 [SRC-00607] Schneider Electric (Square D). *Box Extension Kit Installation (Class 1600)*. 80043-350-04. 2003-12. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-350-04 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-350-04.pdf Note: Replaces 80043-350-03 (11/2000). No catalog numbers printed.

S608 [SRC-00608] Schneider Electric (Square D). *Surgelogic SurgeLoc surge protective devices (brochure)*. 998-21173700_GMA-US (printed 998-21176626). 2021-04. Type: oem_bulletin. URL: https://www.se.com/us/en/download/document/998-21173700_GMA-US/ (accessed 2026-10-21) Local copy: docs/library/SQD/998-21173700_GMA-US.pdf Note: Downloaded in B0003 but never linked. Referenced by Digest Sec. 9 Table 9.36 footnote [107].

S609 [SRC-00609] Schneider Electric (Square D). *Square D Digest (2009) Section 13 - Obsolescent Panelboards (QMB RTI, QMB replacement units, NEHB replacement parts, NQOD merchandised)*. Digest Section 13 (2009); distributor file name Square_D_QM3890B_Catalog.pdf. 2009. Type: oem_catalog. URL: https://default.assets-hunzicker-prod.roccommercecloud.com/assets%2F8a6599affa7ca45a2d40851ce760e8be/Square_D_QM3890B_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/Square_D_QM3890B_Catalog.pdf Note: Distributor-hosted (Hunzicker) copy of an OEM Digest section, 23 pp, pages 13-1..13-14, (c) 2009 Schneider Electric. This is the obsolescent-panelboards section that preceded the separate 'Supplemental and Obsolescence Digest'.

S610 [SRC-00610] Schneider Electric (Square D). *Schneider Electric FAQ FA299520: Can you replace a Q2L main breaker, on a NQOD panel, with the QBL, QDL, or QGL breaker?*. FA299520. 2016-10-18 (modified 2026-08-19). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA299520 (accessed 2026-10-21) Note: Read via WebFetch (curl gets 403).

S611 [SRC-00611] Schneider Electric (Square D). *Schneider Electric FAQ FA104089: What is the replacement for a NQODQ2 Main Circuit Breaker Adapter Kit?*. FA104089. 2003-07-11 (modified 2026-08-17). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA104089 (accessed 2026-10-21) Note: Read via WebFetch.

S612 [SRC-00612] Schneider Electric (Square D). *Schneider Electric FAQ FAQ000265182: What type of breaker does the NQODQB Main Breaker Kit accept?*. FAQ000265182. 2026-01-08. Type: oem_web. URL: https://www.se.com/us/en/faqs/FAQ000265182 (accessed 2026-10-21) Note: Read via WebFetch.

S613 [SRC-00613] Schneider Electric (Square D). *Schneider Electric FAQ FA228483: Can a main breaker be changed out or added to a NQOD panel?*. FA228483. 2014-09-18 (modified 2021-09-29). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA228483 (accessed 2026-10-21) Note: Read via WebFetch.

S614 [SRC-00614] Schneider Electric (Square D). *Web search result summary of se.com FAQs on NEHB / NQ main breaker deadfronts (NQRPLMB2HJ)*. Type: other. URL: https://www.se.com/us/en/faqs/FAQ000259238/ (accessed 2026-10-21) Status: blocked. Note: se.com returned 403 to curl and WebFetch for FAQ000259238 / FAQ000270674 / FA129512; content known only from a search-engine summary. Use at conf C/D only.

S615 [SRC-00615] Connecticut Electric. *UBI Replacement Bulk Circuit Breakers - Your Source for Replacement Circuit Breakers for Use in Federal Pacific, Pushmatic and Zinsco Load Centers*. Rev. 4/05. 2005-04. Type: distributor. URL: https://inspectapedia.com/fpe/FPE%20Replacement%20Breakers%20UBI%20CT%20Elec.pdf (accessed 2026-10-21) Local copy: docs/library/FPE/FPE Replacement Breakers UBI CT Elec.pdf Note: Manufacturer (aftermarket maker) sell sheet, 2 pp, hosted by InspectAPedia. p.2 table 'Corresponds to' gives explicit seller cross-reference UBI catalog no. -> FPE/Pushmatic/Zinsco breaker series. Same sheet re-hosted by Elliott Electric as UBIF15N/UBIP120 'specification sheet'. Copyright 2004 Connecticut Electric.

S616 [SRC-00616] Elliott Electric Supply. *UBIF15N - Replacement Circuit Breaker For Federal Pacific Electric Type NA (Thick) Breakers (product page)*. Type: distributor. URL: https://www.elliottelectric.com/P/Item/FPE/UBIF15N/ (accessed 2026-10-21) Note: States 'Classified and approved for use in Federal Pacific load centers. ETL Listed. 10,000 AIC.'; Special features 'The only newly manufactured and Listed replacements available' (seller claim).

S617 [SRC-00617] Elliott Electric Supply. *UBIP120 - Replacement Circuit Breaker For Pushmatic Circuit Breakers (product page)*. Type: distributor. URL: https://www.elliottelectric.com/P/Item/FPE/UBIP120 (accessed 2026-10-21) Note: States 'Classified for use in Pushmatic and Bulldog load centers. ETL Listed.'; 'Bolt-On for use in Pushmatic and Bulldog Load Centers'.

S618 [SRC-00618] Eaton (via Elliott Electric Supply). *Product specifications - Eaton CL245 (Eaton Classified 3/4in thermal magnetic circuit breaker, Type CL 1-Inch classified replacement breaker)*. Type: oem_catalog. URL: https://www.elliottelectric.com/Media/CL245-ETN-1021-4-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/CL245-ETN-1021-4-Attachment.pdf Note: Eaton-generated product spec sheet mirrored by distributor. Catalog notes: 'Replacement for Square D Homeline, GE Type THQ, Crouse-Hinds Type MP, Thomas and Betts Type TB, Murray Type MP, ITE/Siemens Type QP. Requires Two 1-inch (25.4 mm) spaces.' Certifications UL 489. Refers to brochure 5651B63SH09.

S619 [SRC-00619] Relectric. *Eaton CL circuit breaker for panel (featured article)*. Type: distributor. URL: https://www.relectric.com/featured/eaton-cl-circuit-breaker-for-panel/ (accessed 2026-10-21) Note: Secondary summary; references Eaton classified breaker brochure BR003034EN and whitepaper WP003005EN (eaton.com URLs, not reachable from container). Its 'quick reference chart' brand lists differ from Eaton spec sheet; treat as D.

S620 [SRC-00620] Schneider Electric. *Schneider Electric FAQ FA239605 - Retrofit form / custom trim for existing Schneider Electric or competitor enclosure with current-style NF or NQ interior*. FA239605. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA239605 (accessed 2026-10-21) Status: blocked. Note: se.com returns HTTP 403 to container and WebFetch; content taken from search-engine extracts of the OEM page (quoted text). Re-verify directly.

S621 [SRC-00621] Schneider Electric. *Schneider Electric FAQ FA124771 - Existing box studs are not used in Square D Retrofit offering*. FA124771. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA124771 (accessed 2026-10-21) Status: blocked. Note: 403; content from search-engine extract.

S622 [SRC-00622] Schneider Electric. *Schneider Electric FAQ FA116402 - Panel interiors for existing back boxes (retrofit form to local sales office)*. FA116402. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA116402 (accessed 2026-10-21) Status: blocked. Note: 403; content from search-engine extract.

S623 [SRC-00623] Schneider Electric. *Schneider Electric FAQ FA283569 - Square D does not offer QO or Homeline load center retrofit interiors*. FA283569. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA283569 (accessed 2026-10-21) Status: blocked. Note: 403; content from search-engine extract.

S624 [SRC-00624] Schneider Electric. *Schneider Electric FAQ FA339443 - Installing Square D equipment in other manufacturers' gear (UL listing / warranty may be voided)*. FA339443. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA339443 (accessed 2026-10-21) Status: blocked. Note: 403; content from search-engine extract.

S625 [SRC-00625] Steiner Electric / Standard Electric Supply / Stoneway Electric. *Distributor listings for Square D NQ 14-inch-wide interiors (NQ418L1C14, NQ430L1C14, NQ430L2C14, NQ442L2C14, NQ30L1C14GS)*. Type: distributor. URL: https://steinerelectric.com/Catalog/Circuit-BreakersEV-Charging-And-Power-Distribution/Panelboards-And-Accessories/Panelboard-Interiors/Square-D-NQ442L2C14-NQ-14IN-42CKT-225A-3-652575 (accessed 2026-10-21) Status: blocked. Note: Pages 403 to fetch; titles/dimensions from search-engine extracts. NQ442L2C14: 14 in W x 5-3/4 in D x 38 in H (Standard Electric); NQ430L1C14 32 x 14 x 5-3/4 in (Steiner).

S626 [SRC-00626] Breaker King. *Breaker King - Breaker Mounting Kits :: Cutler-Hammer/Eaton (category listing pages 1-3, 28 products)*. Type: distributor. URL: https://www.breakerking.com/catalog/index.php?main_page=index&cPath=4_187_188 (accessed 2026-10-21) Note: Manufacturer field 'EATON/Cutler Aftermarket Repl'; text 'Kit # XX replaces OEM YY' or 'OEM Item KPRL4KDT Is Provided as PCS Brand Aftermarket Kit'.

S627 [SRC-00627] Breaker King. *Breaker King - Breaker Mounting Kits :: General Electric (category listing pages 1-5, 48 products)*. Type: distributor. URL: https://www.breakerking.com/catalog/index.php?main_page=index&cPath=4_187_190 (accessed 2026-10-21) Note: 'GE/ABB Aftermarket Replacement' items with 'Kit # XX replaces OEM YY'; others list 'Kit OEM #' only (condition not stated); some 'Previously used'.

S628 [SRC-00628] Breaker King. *Breaker King - Breaker Mounting Kits :: Siemens/I-T-E (category listing pages 1-5, 43 products)*. Type: distributor. URL: https://www.breakerking.com/catalog/index.php?main_page=index&cPath=4_187_191 (accessed 2026-10-21) Note: 'SIEMENS/I-T-E Aftermarket Repl' items with 'replaces OEM'; P1/P2 items list 'OEM P/N' only.

S629 [SRC-00629] Breaker King. *Breaker King - Breaker Mounting Kits :: Square D (category listing, 10 products)*. Type: distributor. URL: https://www.breakerking.com/catalog/index.php?main_page=index&cPath=4_187_192 (accessed 2026-10-21) Note: ML kits labelled aftermarket, 'Equal To - OEM # SK45xx'.

S630 [SRC-00630] Breaker King. *Breaker King - Breaker Mounting Kits :: Westinghouse (category listing pages 1-2, 15 products)*. Type: distributor. URL: https://www.breakerking.com/catalog/index.php?main_page=index&cPath=4_187_193 (accessed 2026-10-21) Note: Westinghouse CDP kits 'Kit FB1K replaces OEM KCDPFB150' etc.; condition label not shown on listing.

S631 [SRC-00631] Relectric. *Relectric - Breaker Parts & Accessories: Mounting Hardware (listing page 20; Industrial Electric Mfg items)*. Type: distributor. URL: https://www.relectric.com/circuit-breaker-parts-and-accessories/mounting-hardware?page=20 (accessed 2026-10-21) Note: Lists Industrial Electric Mfg Inc (IEM) CDP-type mounting kits for GE/Eaton breakers (CDPTEDT, CDPTHEDT, CDPFDZBRACKET); other IEM codes (CDPEDT, CDPSGS, CDPSGT, CDPKDT, CDPTJJS) seen on other pages via search extracts.

S632 [SRC-00632] Eaton (via Elliott Electric Supply). *RACH24L125I CH Retrofit Kit Int Only 1 PH 125A Main Lug Only (product data sheet)*. Type: distributor. URL: https://www.elliottelectric.com/Media/RACH24L125I-CHD-1021-4-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RACH24L125I-CHD-1021-4-Attachment.pdf Note: Distributor data sheet with Eaton catalog text: 'Eaton CH 3/4-inch Loadcenter Retrofit Stocking Kit, Main lug only, 125 A, size group a, Cover height 33 in, Cover width 24 in, NEMA 1 ... 24 Circuits, Single-phase ... #4-2/0 AWG'; standard UL 67; dims 6 x 22 x 30 in; 13.2 lb.

S633 [SRC-00633] Elliott Electric Supply / Crescent Electric. *Distributor listings for Eaton CH/BR retrofit stocking kits RDCH42B200I, RDCHFRAME, RTBR12L125R, RTBR12L125Q, RTBR10B100Q*. Type: distributor. URL: https://elliottelectric.com/P/Item/CHD/RDCHFRAME (accessed 2026-10-21) Note: Titles/specs via search-engine extracts (Crescent pages 403). RDCHFRAME 'CH Retrofit Kit Collar Only For RDCH Style Interior', retro size group D, 6 x 22 x 45 in, UL 67; RDCH42B200I 'Eaton CH 3/4-inch Loadcenter Retrofit Stocking Kit, Main circuit breaker, 200 A, Retro size group d, Cover height 47 in, Cover width 24 in, NEMA 1, 25 kAIC ... 42 Circuits ... #1 AWG-300 kcmil'; RTBR12L125R 'BR Retrofit Kit Interior Only, 125 A' (Crescent: Discontinued).

S634 [SRC-00634] ABB. *Tmax XT Retrofit Kits for Spectra Plug-in Panelboards and Switchboards / ABB eCatalog 'Spectra to Tmax XT Smart Cross Reference'*. Type: oem_web. URL: https://new.abb.com/low-voltage/service/service-for-low-voltage-products/tmax-xt-retrofit-kits-for-spectra-plug-in-panelboards-and-switchboards (accessed 2026-10-21) Status: blocked. Note: HTTP 503 to WebFetch; content via search-engine extracts: kits 'allow legacy GE Spectra plug-in breakers installed in Spectra panelboards and switchboards to be upgraded' and customers 'can maintain the UL listing of their equipment without additional charges'. eCatalog entries pair breaker + kit, e.g. XT4VU3100BFF000XXX + SRFB6XT4FPX; XT4SQ3100EFF000XXX + SRFB3XT4FPX (Spectra SEL 100 A frame, rating plug SRPE100A80); XT4LU3225GFF000XXX + SRFB3XT4FPX (Spectra SGH 225 A).

S635 [SRC-00635] Mike Holt Enterprises forum. *Need leads for suppliers of obsolete breaker mounting kits (Mike Holt forum thread)*. Type: forum. URL: https://forums.mikeholt.com/threads/need-leads-for-suppliers-of-obsolete-breaker-mounting-kits.2580007 (accessed 2026-10-21) Status: blocked. Note: 403; via search extract: Arrow-Hart panel kit needed; breakeroutlet.com said they could have a kit made but could not provide photos/drawings; Breaker King could not help.

S636 [SRC-00636] Schneider Electric. *Schneider Electric FAQ FA129258 - Bus bars in obsolete NEHB panelboard are not field replaceable items*. FA129258. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA129258 (accessed 2026-10-21) Status: blocked. Note: 403; via search extract.

S637 [SRC-00637] Eaton. *Eaton Retrofit Interior Kit (video) and retrofit interior kit brochure (USESI 295119)*. Type: oem_catalog. URL: https://assets.usesi.com/product-media/brochures/USESI_295119_brochure.pdf (accessed 2026-10-21) Note: Via search extract: kits 'designed and tested specifically for renovating an outdated electrical panel in an apartment, condominium, or a single family home'; 'UL 67 Listed'; 'Replaces vintage brands that have hard to find, expensive replacement breakers'; 'measure the existing panel enclosure to determine appropriate kits'. Video: https://videos.eaton.com/detail/video/6352598334112/retrofit-interior-kit

S638 [SRC-00638] Schneider Electric (Square D). *Square D Digest, Section 1: Load Centers / QO Miniature Circuit Breakers (QO Accessories, Table 1.16)*. Digest Section 1 (dated 1/11/2024), Class 1130, ref. catalog 1100CT0501. 2024-01-11. Type: oem_catalog. URL: https://assets.gordonelectricsupply.com/datasheets/ts/SchneiderElectric-SquareD_80051_1_22_CAT.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/SchneiderElectric-SquareD_80051_1_22_CAT.pdf Note: Distributor-hosted copy (Gordon Electric Supply). QO accessories p.1-8.

S639 [SRC-00639] Schneider Electric (Square D). *Square D Digest 2012, Section 1: Load Centers (with list prices)*. Digest Section 1 (2012). 2012. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_153895_catalog.pdf (accessed 2026-10-21) Note: Distributor-hosted (USESI). QO accessories table p.1-4 area with list prices; QO load center accessories Table 1.32 p.1-11 (retaining kits). Not saved locally (scratch only).

S640 [SRC-00640] Schneider Electric (Square D). *QO1PA Series 1, QOU1PA and HOM1PA Series 1 Handle Padlock Attachment*. Instruction Bulletin 48840-159-01 Rev. 01. 2010-04. Type: oem_instruction. URL: https://media.distributordatasolutions.com/schneider_synd_rework/2024q1/documents/7d8535023054ee99707abffcb67347f3afd86f67.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/SQD_48840-159-01_QO1PA.pdf

S641 [SRC-00641] Schneider Electric (Square D). *Fixed Padlock Attachment Kits S29371 and S37422 for PowerPact H- and J-Frame Circuit Breakers*. Instruction Bulletin 48940-241-01 Rev. 01. 2010-03. Type: oem_instruction. URL: https://www.farnell.com/datasheets/1996007.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/SQD_48940-241-01_S29371_S37422.pdf

S642 [SRC-00642] Schneider Electric (Square D). *480Y/277 Vac EDB, EGB and EJB Lighting Panelboard Circuit Breakers (Class 0515 data bulletin)*. Class 0515 bulletin. Type: oem_bulletin. URL: https://assets.usesi.com/product-media/brochures/USESI_325159_brochure.pdf (accessed 2026-10-21) Note: Handle Accessories table p.3 (HPAFD). Steven Engineering courtesy copy hosted by USESI.

S643 [SRC-00643] Schneider Electric (Square D). *NQ Circuit Breaker Panelboards, Class 1640*. Catalog 1640CT0801 R10/19. 2019-10. Type: oem_catalog. URL: https://www.wilsherco.com/wp-content/uploads/2020/03/1640CT0801.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/1640CT0801.pdf Note: Indoor Enclosure Accessories p.23 (PK4FL, PK5FL, LP9618); QO binding/connector screw torque Table 13/14 p.16

S644 [SRC-00644] Schneider Electric (Square D). *NQOD Circuit Breaker Panelboards, Class 1630 (Application Data)*. Class 1630 catalog, 01/2005. 2005-01. Type: oem_catalog. URL: https://cdn.stevenengineering.com/wordpresssprd/wp-content/uploads/2019/02/45PB-NQOD.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/45PB-NQOD.pdf Note: pp.4-5 enclosure accessories: PK4FL, PK5FL, LP9618, PK4NVL, LP9502 trim screws

S645 [SRC-00645] Schneider Electric. *Schneider Electric product page / FAQ search snippets for S29370 and S29371 (se.com, blocked from container; seen via web search results)*. Type: oem_web. URL: https://www.se.com/us/en/product/S29371/circuit-breaker-accessory-powerpact-h-j-padlock-handle-fixed-lock-off-or-on/ (accessed 2026-10-21) Status: blocked. Note: Content known only from search-engine snippets: S29371 discontinued, replaced by HJPA; S29370 removable lock-OFF-only for PowerPacT B/H/J/L.

S646 [SRC-00646] various distributors. *Distributor listings for Square D EDPA / EDPAF padlock attachments (standardelectricsupply.com, penntoolco.com)*. Type: distributor. URL: https://www.standardelectricsupply.com/Catalog/All-Products/Distribution-Equipment/Circuit-Breakers?page=247 (accessed 2026-10-21) Note: Search-result snippets only.

S647 [SRC-00647] Eaton. *Volume 4 - Circuit Protection, Tab 1.1 Miniature Circuit Breakers and Supplementary Protectors (QUICKLAG accessories)*. CA08100005E (September 2017). 2017-09. Type: oem_catalog. URL: https://www.tobins.com.au/SupplierBrochures/eaton/Quicklag-Miniature-Circuit-Breakers.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Quicklag-Miniature-Circuit-Breakers_CA08100005E_2017.pdf Note: Distributor-hosted (Tobins). Accessories pp. V4-T1-43..V4-T1-46. Same tables in Oct 2015 edition (Farnell copy https://www.farnell.com/datasheets/1995979.pdf, saved as CA08100005E_2015_V4T1_farnell.pdf).

S648 [SRC-00648] GE. *Record Plus Molded Case Circuit Breaker Accessories - Plug In Base (FC100)*. DEH40915 R03. 2004-12. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294965/ge-industrial-solutions-record-plus-plug-in-bases-fc100.html (accessed 2026-10-21) Local copy: docs/library/GEA/manualsdir_294965_DEH40915.txt Note: Text rendering of 6-page instruction on manualsdir.com

S649 [SRC-00649] GE Industrial Solutions. *Spectra Series Plug-in Switchboards - Pro-Stock Program*. DEA-623. 2015-11. Type: oem_catalog. URL: https://assets.usesi.com/product-media/brochures/USESI_14463_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_14463_brochure.pdf Note: 8-page brochure; tables "Circuit Breaker Mounting Modules Plug-In Spectra 3-pole / 2-pole" (filler plate only kit and complete kit numbers by breaker frame, X height and box width). Distributor-hosted (USESI) copy of OEM document.

S650 [SRC-00650] GE Consumer & Industrial. *BuyLog Catalog Section 9: Panelboards (A-Series, Spectra Series, SCP Plus, CCB/QMR renewal parts) with list prices*. BuyLog Section 9, Rev. 1/08. 2008-01. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_14463_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_14463_catalog.pdf Note: 120 pp. Renewal parts pp. 9-101 to 9-118 incl. ADS load bases, lug kits, SCP Plus boxes/fronts/hardware (9-115), CCB/QMR straps, boxes, fronts, fillers, THFP fusible switches (9-116 to 9-118). Footnote numerals fused into part numbers in text extraction.

S651 [SRC-00651] GE Industrial Systems. *Spectra Series Power Panelboards - Circuit Breaker Cover (Record Plus FE frames)*. DEH41271 R01. 2002. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294895/ge-industrial-solutions-spectra-power-panelboard-record-plus-fe-breaker-cover-kit.html (accessed 2026-10-21) Local copy: docs/library/GEA/manualsdir_294895_DEH41271.txt

S652 [SRC-00652] GE Industrial Systems. *Spectra Series Power Panelboards 30-200 Ampere Fusible Switch*. GEH5548 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294748/ge-industrial-solutions-spectra-series-power-panelboards-30200-ampere-fusible-switch.html (accessed 2026-10-21) Local copy: docs/library/GEA/manualsdir_294748_GEH5548.txt

S653 [SRC-00653] GE Industrial Systems. *Spectra Series Power Panelboards 400-600 Ampere Fusible Switch*. GEH5550 R04. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295151/ge-industrial-solutions-spectra-series-power-panelboards-400600-ampere-fusible-switch.html (accessed 2026-10-21) Local copy: docs/library/GEA/manualsdir_295151_GEH5550.txt

S654 [SRC-00654] GE Industrial Systems. *Spectra Series Power Panelboards 800 & 1200 Ampere Fusible Switch*. GEH5597 R04. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294757/ge-industrial-solutions-spectra-series-power-panelboards-800-1200-ampere-fusible-switch.html (accessed 2026-10-21) Local copy: docs/library/GEA/manualsdir_294757_GEH5597.txt

S655 [SRC-00655] GE Industrial Systems. *Spectra Series Power Panelboards 60 A/600 V, 100 A/240 V, 100 A/600 V Expansion Kits for Type ADS Fusible Switch Units*. GEH5581 R03. 2001-06. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294850/ge-industrial-solutions-spectra-series-power-panelboards-60-a_600-v-100-a_240-v-100-a_600.html (accessed 2026-10-21) Local copy: docs/library/GEA/manualsdir_294850_GEH5581.txt

S656 [SRC-00656] GE Industrial Systems. *Spectra Series Fusible Switch Units 30/60 Ampere Expansion Kit*. GEH5547 R02. 2001-05. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294779/ge-industrial-solutions-spectra-series-power-panelboards-3060-ampere-expansion-kit.html (accessed 2026-10-21) Local copy: docs/library/GEA/manualsdir_294779_GEH5547.txt

S657 [SRC-00657] GE Industrial Systems. *Spectra Series Fusible Switch Units 200 Ampere Expansion Kit (J and T Fuses)*. GEH5582 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294762/ge-industrial-solutions-spectra-series-fusible-switch-units-j-t.html (accessed 2026-10-21) Local copy: docs/library/GEA/manualsdir_294762_GEH5582.txt

S658 [SRC-00658] GE Industrial Systems. *Spectra Series Fusible Switch Units 200 Ampere Expansion Kit (H, K and R Fuses)*. GEH5889 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295260/ge-industrial-solutions-spectra-series-fusible-switch-units-h-k-r.html (accessed 2026-10-21) Local copy: docs/library/GEA/manualsdir_295260_GEH5889.txt

S659 [SRC-00659] GE Industrial Systems. *Spectra Series Power Panelboards Endwall Kit*. GEH5925 R02. 2001-10. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294730/ge-industrial-solutions-spectra-series-power-panelboards-endwall-kit.html (accessed 2026-10-21) Local copy: docs/library/GEA/manualsdir_294730_GEH5925.txt

S660 [SRC-00660] GE Industrial Systems. *Spectra Series Power Panelboards Drip-Resistant Cover*. GEH5926 R02. 2001-10. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294879/ge-industrial-solutions-spectra-series-power-panelboards-drip-resistant-cover.html (accessed 2026-10-21) Local copy: docs/library/GEA/manualsdir_294879_GEH5926.txt

S661 [SRC-00661] ABB (GE legacy). *Spectra Series Switchboards (catalog/application guide) [GE legacy document]*. GET-8032C (ABB ID 9AKK108467A9254). 2013-02. Type: oem_catalog. URL: https://search.abb.com/library/Download.aspx?DocumentID=9AKK108467A9254&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/9AKK108467A9254_GET-8032C_Spectra_Switchboard.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com. Sections 4 (sizing incl. branch device X heights, plug-in vs bolt-on), Reference Publications p.80 (AV3 Access Switchboard DET-138).

S662 [SRC-00662] ABB. *Product Life Cycle Announcement - Spectra Switchboards*. 1SXU900299G0201. 2021-04-01. Type: oem_bulletin. URL: https://search.abb.com/library/Download.aspx?DocumentID=1SXU900299G0201&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1SXU900299G0201_Life_Cycle_Announcement_Spectra_Switchboards_April_2021.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

S663 [SRC-00663] ABB. *ReliaGear SB Low Voltage Switchboards - Installation, Operations and Maintenance Manual*. 1VAL088301-MB Rev B. Type: oem_instruction. URL: https://search.abb.com/library/Download.aspx?DocumentID=1VAL088301-MB&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1VAL088301-MB_RevB_ReliaGearSB_IOMM.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

S664 [SRC-00664] ABB. *ReliaGear SB Switchboard EXcelerate Catalog / Design Guide*. 1SQC088005C0201 Rev C. Type: oem_catalog. URL: https://search.abb.com/library/Download.aspx?DocumentID=1SQC088005C0201&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1SQC088005C0201_RevC_ReliaGear_SB_Switchboard_EXcelerate_Catalog.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com. Configurator-style design guide; no renewal kit numbers found.

S665 [SRC-00665] ABB. *ReliaGear lighting panelboards - Mounting hardware kit for FB and XT2 circuit breakers*. 1TQC173000E0048. 2022-02. Type: oem_instruction. URL: https://search.abb.com/library/Download.aspx?DocumentID=1TQC173000E0048&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1TQC173000E0048.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

S666 [SRC-00666] ABB. *ReliaGear lighting panelboards - Mounting hardware kit for A2, XT1 and XT4 circuit breakers*. 1TQC173000Z0024. Type: oem_instruction. URL: https://search.abb.com/library/Download.aspx?DocumentID=1TQC173000Z0024&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1TQC173000Z0024.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

S667 [SRC-00667] ABB. *ReliaGear Lighting Panelboards - Interior Mounting Kits*. 1TQC173000Z0022 / DEH41056. 2020-03. Type: oem_instruction. URL: https://search.abb.com/library/Download.aspx?DocumentID=1TQC173000Z0022&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1TQC173000Z0022_DEH41056_ReliaGear_InteriorMtingKits_v1.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

S668 [SRC-00668] ABB. *ReliaGear lighting panelboards - Lock Kits*. 1TQC173000Z0023. 2024-12. Type: oem_instruction. URL: https://search.abb.com/library/Download.aspx?DocumentID=1TQC173000Z0023&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1TQC173000Z0023.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

S669 [SRC-00669] ABB (GE legacy). *ASPSERENT - ReliaGear Lighting Panelboard Service Entrance Field Conversion Kit*. 1TQC173000E0032 / GEH6518. 2025-01. Type: oem_instruction. URL: https://search.abb.com/library/Download.aspx?DocumentID=1TQC173000E0032&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1TQC173000E0032.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

S670 [SRC-00670] ABB (GE legacy). *Insulated Equipment Ground Kit Cat. No. EGS12/EGC12 for ReliaGear Lighting Panelboard Type RQ, RL and RE*. 1TQC173000E0023 / GEH5037. 2024-04. Type: oem_instruction. URL: https://search.abb.com/library/Download.aspx?DocumentID=1TQC173000E0023&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1TQC173000E0023.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

S671 [SRC-00671] ABB. *ReliaGear neXT Panelboard - Replacement Part Instructions*. 1SQC900015M0201. 2025. Type: oem_instruction. URL: https://search.abb.com/library/Download.aspx?DocumentID=1SQC900015M0201&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1SQC900015M0201.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

S672 [SRC-00672] ABB. *ReliaGear neXT - Breaker Installation & Removal Instruction Sheet*. 1SQC900028M0201. Type: oem_instruction. URL: https://search.abb.com/library/Download.aspx?DocumentID=1SQC900028M0201&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1SQC900028M0201.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

S673 [SRC-00673] ABB. *ReliaGear neXT - Retrofit Bracket Kit (RGRPIFRK) Instruction Sheet*. 1SQC900029M0201. 2025. Type: oem_instruction. URL: https://search.abb.com/library/Download.aspx?DocumentID=1SQC900029M0201&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1SQC900029M0201.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

S674 [SRC-00674] ABB. *ReliaGear neXT - Dual Main Lugs*. 1SQC900009M0201. Type: oem_instruction. URL: https://search.abb.com/library/Download.aspx?DocumentID=1SQC900009M0201&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1SQC900009M0201.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

S675 [SRC-00675] ABB. *ReliaGear neXT - IP20 Main Lug Barrier Installation Instructions*. 1SQC900024M0201. Type: oem_instruction. URL: https://search.abb.com/library/Download.aspx?DocumentID=1SQC900024M0201&LanguageCode=en&DocumentPartId=&Action=Launch (accessed 2026-10-21) Local copy: docs/library/GEA/1SQC900024M0201.pdf Note: Downloaded via search.abb.com library redirect to library.e.abb.com.

Appendix C Research Status and Open Questions

Evidence class	Part claims
A OEM Verified	26675
B Strongly Corroborated	1171
C Tentative	2494
D Unverified	438

Most frequent documentation gaps

Field	Parts lacking it
Material	2824
Dimensions	2749
Torque values	1561
Mounting-hole pattern	1239
Status	1111
Finish / plating	1082
OEM instruction document	1042
Fasteners	699
Identification features	651
Kit contents	474
Aftermarket / reproduction	420
gauge	71
Listing / approvals	71
fuse class	68
weight	59
current_status	57
lock	56
oem_status_confirmation	55
knockouts	49
door/lock details	46
orderable catalog (AFP) kit containing this cover	43
width	41
bus clip/connector part numbers	40
lug data	37
stud dimensions	32
lug type per suffix (MA/MC/CA/N)	31
hole pattern	30
strap dimensions	30
separate orderability	26
depth	24
Current rating	22
lug manufacturer part number	22
front outer dimensions	22
trim clamp part numbers	22
current_availability	21
wire range	20
knockout pattern	20
field-installation into factory-assembled (non Pro-Stock) panels	19
fit of current NC trims	19
fuse_class_detail	18
exact plate dimensions per box width	17
applicability to other QMB unit sizes	17
Poles	16

Field	Parts lacking it
renewal parts	16
exact dimensions	15
lug count	13
bus connection hole pattern	13
mounting_hardware	12
install_doc number	12
quantity	11
key_code	9
date of instruction	9
screw size	9
crimp tool/die	9
stud size	9
quantity per package	8
kit_contents (washers, quantities)	7
mounting height (except SL400)	7
use on I-Line versions of same frames not stated in this source	7
lock_part_number	6
bus material	6
Breaker compatibility	6
mounting height	6
ratings	6
exact per-wire torque mapping (see Table 127)	6
lug_count	5
capacity code digits	5
bus material confirm	5
feed configuration	5
full ratings	5
wire range (verify against PDF p.124)	5
door lock type	5
pole_width	4
which A-Series types (AQ/AE/AD) each fits	4
lug part number	4
part dimensions	4
length	4
kit_contents (itemised)	3
Description	3
Voltage rating	3
contact ratings	3
thread size	3
thread	3
number of terminals	2
current status	2
lug kit	2
conductors per lug	2
kit_contents (lug count)	2
difference between A and F suffix	2
door kits for other heights (HCW59D, HCW68D?) not printed	2
breaker compatibility	1
not found in 2008/2015 catalog tables	1
height_increment	1
bus_connector_details	1
mounting_hardware_part_numbers	1

Field	Parts lacking it
OEM confirmation	1
lug cover part number (footnote says a user-supplied lug cover is required)	1
FP variant number	1
G-number by kit	1
kits using it	1
circuits	1
material of this specific number	1
terminals	1
horsepower ratings	1
relation to SL800M5	1
other HCN sizes	1
hole diameter	1
head style	1
lockable	1
breaker family record not created for Square D G-frame	1
OEM table reference	1
kit quantity	1
breaker spaces	1
Installation location	1
material grade	1
description of tool	1
enclosure rating change	1
everything except number	1
listing basis	1

Open research leads (priority 1–2)

Lead	Pri.	Topic / detail
LEAD-0001	1	**Eaton instruction leaflets for KB/KL/KPRL3/KPRL4 kits** — Renewal-parts guides give catalog numbers and compatibility but no kit drawings, torque values, strap dimensions or hole patterns. Each kit ships with instructions (IL/IB numbers not cited in the guides). Search Eaton document library for IL numbers packed with KPRL4X32, KPRL3AFD3, KB13AFT, KL23AMS, PRLSEBFD.
LEAD-0002	1	**Supersession mapping 2017 -> 2021 (PRL4 KPRL4FD/FD1/FD2/ED/ED2/LD; PRL1a/2a deadfronts 4180B03/4180B61/4180B05; PRL3a covers 4176B68/4180B93/4178B08/4179B39-42; filler 4178B06H01)** — April 2021 edition replaced these numbers with KPRL4X12/X22/X32/LC and 42C80xx covers (same table rows). Distributor text says 4178B06H01 is for panels built before April 2019 and 42C8083H01 after - implies a chassis change, so old and new are probably NOT interchangeable. Confirm with Eaton Sumter aftermarket (803-481-6677) or a December 2020 edition of RP01400001E. Docs: RP01400001E
LEAD-0014	1	**Pow-R-Line C switchboard branch provision / connector kit catalog numbers** — Vol 12 p. V12-T15-5 says provisions/connectors are available for all PRLC ratings, but no catalog numbers are public. Obtain the PRLC distribution chassis renewal-parts/price list (Sumter) or a PRLC field-installation IL for adding group-mounted FD/JD/KD/LD/MDL/ND devices; confirm whether KPRL4/KPRL4X kits are the same parts. Docs: IM01500001E, CA08100003E Tab 4
LEAD-0015	1	**WF/WRP switchboard distribution-section connector and retrofit kits** — RP01400002E p.20 lists 'Retrofit kits for WF and WRP distribution sections' and 'Connector kits for WF and WRP distribution sections' from Sumter but gives no numbers. Check whether KCDP/KFDP kits are used, since WF/WRP feeders were CDP-type breakers and FDP switches. Docs: RP01400002E, PL01400002E
LEAD-0025	1	**NQOD / NEHB legacy kit part numbers** — No OEM table of NQOD main breaker kits (bulletin 80043-699-03 covers a 250 A NQOD main kit but prints no catalog number), NQOD neutral/lug kits or NEHB kits found. Search Supplemental and Obsolescence Digest (Digest Plus 'Supplemental and Obsolescence Digest') and older Digest 170-175 PDFs for NQOD/NEHB accessory tables. Docs: 80043-699-03, 80043-687-03
LEAD-0026	1	**SKNQOD225 finger part numbers for reproduction** — OEM FAQ FA124209 gives component numbers 80110-005-01 (A/C finger), 80110-006-01 (B finger), 80025-068-01 (screw). Obtain drawings/dimensions; check whether a 400 A NQOD connector kit existed.
LEAD-0036	1	**2700CT1601 OEM QED-2 I-Line interiors catalog** — Contains single/double-row OEM interior selection tables (CF... numbers), likely end closures, splice/main lug kits. Blocked by Akamai (productinfo.se.com, download.se.com 403). Try a distributor mirror (media.distributordatasolutions.com), Rexel/Graybar spec-sheet links, or a browser session. Docs: 2700CT1601
LEAD-0037	1	**QED-2 instruction bulletin 80043-055-16 (2024) and -13 (2018)** — Handling, assembly, splice (through-bus) and torque data for QED-2; likely gives splice plate hardware and torque values. Blocked. Docs: 80043-055-16, 80043-055-13

Lead	Pri.	Topic / detail
LEAD-0038	1	**OEM interiors IB 80235-597-09** — Schneider FAQ cites IB 80235-597-09 for single/double-row OEM I-Line interiors. Docs: 80235-597-09
LEAD-0049	1	**Current ABB BuyLog Section 11 (2021/2022) - ReliaGear neXT kit numbers and Spectra retrofit kits** — Contains ReliaGear neXT catalog nomenclature, single breaker-installation-kit catalog number, 'Retrofit kit for Spectra panelboards' and 'Spectra (obsoleted) bolt-on mounting hardware'. Host electrification.us.abb.com returns 503/empty reply from this container; try another network or distributor mirror. Docs: BuyLog Section 11 (ABB)
LEAD-0050	1	**Spectra bolt-on strap instruction leaflets DEH-047, DEH-059, DEH-060, DEH-061, DEH-062 and DEH042 cover supports** — Would give strap part numbers, kit contents and torques for AMCB EB/SE, SF, SG, SK/KM and EY kits, plus cover-support catalog numbers by panel width. Copies exist on manualmachine.com (HTTP 403 here) - e.g. DEH061 AMCB3KM/AMCB2KM, DEH042 SE/SF/TE/TF/TQ/TEL cover supports, AMCB4GB/AMCB6GB, AMCB2GM/AMCB3GM. Docs: DEH-047, DEH-059, DEH-060, DEH-061, DEH-062, DEH042
LEAD-0058	1	**Legacy ITE / Gould-ITE lighting panelboard renewal parts (pre-Siemens S1/S2)** — No OEM ITE, ITE Imperial or Gould-ITE panelboard renewal-parts catalogue was found online. Type designations in the scope (ITE NQB/NLAB/NHB, EQ panelboards, 'CDP' early series) were NOT confirmed in any document reached. Need scanned ITE 'Distribution Products' catalogues (1960s-1980s) or Siemens-Allis price lists; try archive.org, worldradiohistory, eBay catalogue scans, and Siemens legacy support (1-800-333-7421).
LEAD-0059	1	**SpeedFax Section 12 (Switchboards) page 12-32 branch device mounting kits** — SpeedFax Sec.11 p.11-15 says: 'For Series 5, Series 6, CDP6 and VB6 panels as well as FC20, FCI, FCII, SB1, SB2 and SB3 distribution switchboards, see page 12-32 for branch device mounting kits.' US Section 12 PDF not retrieved; try media.distributordatasolutions.com siemenscomplete documents or usa.siemens.com/speedfax. Docs: SPEEDFAX Section 12 p.12-32
LEAD-0067	1	**Current Eaton Volume 4 Tab 2 (CA08100005E) terminal and accessory tables** — eaton.com blocked from container. Needed to confirm newer interphase barrier numbering (IPB2 vs IPB3), J-frame shield line/load, TA350K 350 vs 400 A, 3T225FD and 3TA150FB, K-frame keeper nut pack size, and status/supersessions. Docs: CA08100005E
LEAD-0068	1	**Square D PowerPact M/P/R catalog lug tables** — Need OEM tables for AL800M23K, AL800P6K, AL800P7K, AL1200P25K, CU800M..., R-frame lugs; only tapped versions (…TK) found in Digest. Docs: 0612CT0101
LEAD-0081	1	**FPE OEM panelboard catalog / renewal parts list** — Find original Federal Pacific (or American Circuit Breaker / Federal Pacific Equipment) panelboard catalog giving CDP/BDP/NDP/FDP/NA1B/NH1B/NBLP definitions and the KCDP/KBDP/KFDP/KQB kit tables with breaker compatibility, dimensions and bus details. Circuit Breaker Sales (Matthews NC, 704-882-1875) holds FPE technical documents per fpeparts.com.
LEAD-0082	1	**Confirm KBDP3C frame and KCDP5C/KBDP5C ratings** — Numbering pattern (1=NE/NEF, 2=NEJ, 3=NFJ, 4=NJL, 5=NM) is inferred; Superbreakers gives 225 A for KCDP5C (NM/NN) which looks wrong.
LEAD-0085	1	**Eaton CH/BR retrofit kits current status** — Verify whether RACH*/RBCH*/RCCH*/RDCH*/RABR*/RBBR*/RCBR*/RDBR*/REBR*/RAABR* kit numbers are still orderable (Lincoln Flex Center 800-330-6479) and find the original Eaton publication number/date; look for 480Y/277 V retrofit (PRL-based) offerings and Square D/Siemens equivalents.
LEAD-0099	1	**Siemens instruction-sheet bucket (remaining sheets)** — Public S3 bucket dcc-data-extract 'Compas/Instruction Sheet Quick Guide' holds ~1,290 Siemens SIE_IS_* sheets; this batch processed panelboard/switchboard kit sheets only. Not yet processed: MCCB terminal/lug kits (TA*/TC* lug sheets, e.g. SIE_IS_JD-LD_Distribution-Lug, SIE_IS_FD_Compression-Lug), Vacu-Break/HCP switch kits, PowerMod/meter-stack kits (reppartsspdfax: GMBC1/2, MMCVR1, MMBMT1, MMSCK1, MMPK11/13), MG1/SMND/NG1D image sheets, F672/F6162D fusible kits.
LEAD-0102	1	**QED-2 IB 80043-055 torque tables (exact row pairing)** — Section 9 tables (printed pp.51-52 of -13; pp.53-54 of -12) read only through ManualsLib text rendering; hardware-type to torque pairing ambiguous. Get the PDF (productinfo.se.com / download.se.com 403; Scribd copy 881634201 JS-only) and re-transcribe Tables 6-8; also capture through-bus splice bolt size/grade (shipping-split instructions) and Qwik-Flange busway hardware. Docs: 80043-055-12, 80043-055-13, 80043-055-16
LEAD-0103	1	**2700CT1601 OEM QED-2 I-Line interiors catalog and IB 80235-597-09** — Still blocked (productinfo.se.com 403). Schneider STEP-model pages (se.com/us/en/download/document/<CF...>UMS-03) are readable by WebFetch and give interior titles, e.g. CF16KF63C = 1600A 63H double-row centre-feed copper; could be used to decode the CF nomenclature for all OEM interiors. Docs: 2700CT1601, 80235-597-09, CF16KF63C117UMS-03
LEAD-0111	1	**Eaton RP01400003E - Vintage Cutler-Hammer panelboards and switchboards renewal parts (MP40, MP-200, PB, PH, PH-L, EP, EE)** — Primary kit tables for MP40/MP2/PH/EE/EP. eaton.com blocked from container (HTTP/2 error, empty reply); usermanual.wiki mirror redirects to manuals.plus captcha; Wayback unreachable. Try from a normal browser or ask Eaton Sumter Aftermarket Center (803-481-6677 per search snippet). Docs: RP01400003E
LEAD-0112	1	**Eaton PL01400003E - Vintage Cutler-Hammer price list (Jan 2008)** — Gives the OEM catalog numbers for MP40 retrofit kits ('KMP40...' pattern per snippet), PH cover plates/deadfront kits/trim lock, neutral assemblies, ground bars. Wesco copy 403, Carlton-Bates behind Cloudflare. Docs: PL01400003E
LEAD-0113	1	**GE GEJ-3006A / GEG-13610B scan (archive.org, access-restricted)** — Borrow/view the scanned pages to confirm part-number-to-row mapping for bus supports and lugs, and capture remaining rows (blank filler 1X, screw assembly use, any interior/bus parts). Docs: GEJ-3006A, GEG-13610B
LEAD-0123	1	**PL01400003E / PL01400001E / PL01400002E price lists still not obtained** — RP01400003E (now obtained) says pricing is in PL01400003E (discount symbol CE9). Wesco and Carlton-Bates mirrors return 403 to curl and WebFetch; guessed cooperindustries.com DAM paths 404. Price lists would give the full enumerated KMP40*/KPH*/KPH-L*/EE2 unit and MP40FC-nX/MP100FC-nX numbers. Docs: PL01400003E, PL01400001E, PL01400002E

Lead	Pri.	Topic / detail
LEAD-0145	1	**Eaton classified breaker compatibility chart / brochure BR003034EN and whitepaper WP003005EN** — Eaton CL/CLCAF/CLGF/CLDF classified breakers: obtain the official load-centre catalog-number compatibility chart (eaton.com unreachable from container). Needed for an authoritative classified cross-reference table. Docs: BR003034EN, WP003005EN, 5651B63SH09
LEAD-0146	1	**Identify 'PCS' maker of Breaker King aftermarket panelboard kits** — Breaker King labels many kits '(PCS) Aftermarket Assembly' / 'Provided as PCS Brand Aftermarket Kit' with PCS kit numbers (NEF1K, FD3K, ED4K, SED1K, ED65K ...). Identify PCS, obtain drawings/material specs and any test/listing basis. Remaining Breaker King pages not captured: Westinghouse page 1 items BCDPFW/BCDPJW/BCDPKW/BCDPKLW (no OEM xref), GE A-Series II 'unspecified/specified space' kits (BASPP...) without OEM xref.
LEAD-0162	1	**ABB library direct-download route (search.abb.com/library/Download.aspx?DocumentID=<ABB doc ID>)** — search.abb.com redirects to signed library.e.abb.com URLs and works from this container even though electrification.us.abb.com and library.e.abb.com direct links fail (503/403). Requires the ABB document ID (e.g. 9AKK108467A9254 for GET-8032C, 1TQC173000E00xx/Z00xx ReliaGear lighting kits, 1SQC9000xxM0201 neXT instructions). Find the IDs for BuyLog Section 11 (2021/2022), GE DEH-0xx/DEH-4xxxx Spectra kit leaflets and GEH-5588/5630 via search-result metadata, then download.
LEAD-0003	2	**RP.38F.01.T.E (February 2000) Cutler-Hammer panelboard renewal parts** — Predecessor of RP01400001E; would cover earlier PRL1a/2a/3a/4B part numbers and possibly vintage PRL1/2/3 connector straps. Not found online. Docs: RP.38F.01.T.E
LEAD-0004	2	**RP01400002E April 2009 edition and PL01400002E price list** — Earlier vintage-Westinghouse renewal parts edition and price list referenced by Feb 2013 edition. Docs: RP01400002E, PL01400002E, PL01400001E
LEAD-0005	2	**Drawings 42c8083.pdf etc. on Rexel** — Rexel product page for 42C8083H01 links a drawing file '42c8083.pdf' (not opened). Similar drawing links may exist for other 42C80xx/4176Bxx covers - source of dimensions/hole patterns.
LEAD-0006	2	**KPRL4LFD3 (distributor: 'CON KIT FD+LFD PRL4')** — Dixon Electric (Canada) lists Eaton KPRL4LFD3; not in any OEM table found (2021 table lists FD/LFD under KPRL4FBP). Redirect to dixon.ca not followed.
LEAD-0007	2	**Pow-R-Xpress PRL4X branch fillers PRXP4PD34FILL, PRXP4PD2FILL1 and P44X25** — Distributor-only numbers for PRL4X fillers and PRL4 4X blank cover (P44X25). Relationship to OEM 6554C0x not established.
LEAD-0016	2	**Price list PL01400002E (CDP/HCDP, FDP, PRL1-LX, PRL1, PRL2, PRL3) and PL01400001E** — Price lists would confirm full catalog-number sets (e.g. all KCDP retrofit permutations, KCDPnX fillers) and current availability. Docs: PL01400002E, PL01400001E
LEAD-0017	2	**RP01400003E renewal parts for Cutler-Hammer MP40, MP-200, PB, PH, PH-L, EP, EE panelboards** — Referenced in Vol 12 Tab 4 for branch-device retrofit kits for Cutler-Hammer legacy panelboards (also plug-in power panels/switchboards EE/EP). Not retrieved. Docs: RP01400003E, PL01400003E
LEAD-0018	2	**RP01414001E Panelboard Renewal Parts Supplement** — Referenced with RP01400001E in Vol 12 Tab 4 pp. V12-T4-15..19. Not found. Docs: RP01414001E
LEAD-0019	2	**PRL4 kit renumbering 2017 -> 2022 (KPRL4FD/ED/LD/MC/ND -> KPRL4X32/X22/LC/X34/X35)** — Comparison of RP01400001E Oct 2017 Table 37 and May 2022 Tables 46-47 suggests renumbering with Pow-R-Line Xpert (PD2-PD5 frames). Need explicit OEM supersession statement (April 2021 / Dec 2020 editions, Eaton product pages). Docs: RP01400001E
LEAD-0027	2	**NQ/NF branch connector part numbers inside SKNQBC/SKNF250/SKNF600** — Bulletins 80043-735-01 and 80043-767-01 give contents but not component part numbers or dimensions. SKNF250 torque text is internally inconsistent (30-40 lb-in vs 6.74-8.99 N-m). Docs: 80043-735-01, 80043-767-01
LEAD-0028	2	**Bulletin number scan gaps** — download.schneider-electric.com accepts p_Doc_Ref=<doc number> (browser UA); HEAD scan found 80043-6xx..8xx bulletins, but rate-limiting (403) means some numbers were missed. 80043-0xx..5xx was scanned single-pass (only 9 hits) - rescan slowly with suffixes -01..-06. Also scan 48041-xxx and 80030-xxx series. Docs: 80043-xxx, 48041-xxx, 80030-xxx
LEAD-0029	2	**Downloaded but not yet mined bulletins** — 80043-616-03 / 80043-449-03 (I-Line 4-piece trim & door kits), 80043-660-04 (HCP trim), 80043-706-02 & 80043-789-01 (I-Line CT neutral bonding), 80043-817/818/820/822/826-01 (fingersafe replacement parts QOFSBF, QOFSLALB, QOFSHALB, NQHJLSC, NQQLSC, NQLALHLSC, NQMLLSC, NQNCC), 80043-844-01 (RPINTBK800HCP, RPINTBK1200HCPC, RPINTBK1200HCR barrier kits), 80043-772-01 (quarter-turn fastener kit, LP9503), 80043-773-01 (endwall/closing plate MHCOEW20A/F), 80043-350-04 (box extension), 80043-455-04 / 80043-771-01 / 80043-850-01 (MH WP enclosures), 80043-252-04 (MH NEMA 4/4X). Only some copied to library; re-download as needed. Docs: 80043-616-03, 80043-449-03, 80043-660-04, 80043-706-02, 80043-789-01, 80043-817-01, 80043-822-01, 80043-826-01, 80043-844-01, 80043-772-01, 80043-773-01, 80043-350-04
LEAD-0039	2	**Data Bulletin 0600DB1004 I-Line plug-on connection design** — Jaw design, bolt-on clamp details, I-Line busway/switchgear connections. Docs: 0600DB1004
LEAD-0040	2	**Current 2700CT1101 (v02, 2025-12, 140 MB) and 2110CT9701 v2.1 (2025-02)** — Newer revisions may add QED-2 Series 2 changes (QMB 63 in. only) and accessory tables. Only 2012 and 2019 editions retrieved. Docs: 2700CT1101, 2110CT9701
LEAD-0041	2	**Legacy QMB replacement attachment 'QMB Replacements.pdf' and Supplemental Digest** — Several se.com FAQs reference an attached QMB Replacements.pdf and the Supplemental Digest for QMB3400LA/QMB3300LA and EX/LEX extension kits. Would give full legacy cross-reference table.
LEAD-0042	2	**Unverified FAQs FA123288, FA87289, FA99653** — QMB3640, QMB303T and QMB306T replacement answers seen only in search summaries (rate-limited 403). Re-fetch to upgrade s36 claims to A. Docs: FA123288, FA87289, FA99653

Lead	Pri.	Topic / detail
LEAD-0051	2	**Spectra plug-in module instructions GEH-5623/5624/5625/5626/5643/5673/5675/5677 and hardware kits GEH-5913** — Module-level torques and bus-clip part numbers; GEH-5913 should confirm AHK/AHKB kit contents and the module-to-AHK mapping (PDF text column alignment on BuyLog p.11-44 is ambiguous). Docs: GEH-5623, GEH-5624, GEH-5625, GEH-5626, GEH-5643, GEH-5673, GEH-5675, GEH-5677, GEH-5913
LEAD-0052	2	**GEH5589 APN/APNB interiors installation** — Install of Spectra interiors into APB boxes; listed on manualmachine (blocked). Docs: GEH5589
LEAD-0053	2	**Main lug kit instructions GEH-5588 / GEH-5630 and AMB-numbered main lug kits (p.11-28)** — BuyLog p.11-28 lists a second main-lug numbering (AMB3600MAF, AMB3120MAF, AMB3120DMAF, AMB3250CAF, AMB3600CAF, AMB3800CAF, AMB3120CAF, AMB3120NF, cover plates AFPML4X/6X/6XW) apparently for factory-installed/merchandise panels; relationship to AML modules (p.11-45) unresolved. Not yet catalogued as parts. Docs: GEH-5588, GEH-5630
LEAD-0054	2	**Spectra ANK neutral kit full table (p.11-27) and ADS switch load bases 331A1519Gxx / 331A1545Gx / 331A1543G1** — About 70 ANK/ANKT neutral kit numbers by box width/main config and ~30 ADS load base renewal numbers are in the BuyLog but were not individually catalogued in this batch. Docs: BuyLog p.11-27, BuyLog p.11-44
LEAD-0060	2	**Installation instructions for P1/P2/P3/P4/P5 strap kits** — SpeedFax references Installation Instructions for S3VA41T(D) accommodating xGB/xGB2, and drawing refs (11-D-2267-01 BBKB32, 11-D-2894-01 BBKVA5262P2S, 11-A-2010-01 P1SCRWS, etc.). Siemens SIOS (support.industry.siemens.com) likely hosts these as PDFs; search by kit number. Needed for torque, fastener and dimension data (currently unknown for nearly all parts). Docs: 11-D-2267-01, 11-D-2894-01, 11-D-2895-61, 13-D-2011-13, 11-D-2572-02, 11-D-2573-01, 11-D-2573-02
LEAD-0061	2	**Original P1 / S1 / S2 branch connector replacement parts** — 2021 SpeedFax lists only Revised P1 branch connectors (P1CONACPHCU, P1CONBPHAL, P1CONBPHCU). Whether these fit original P1 or S1/S2 interiors is not stated (table column marks Revised P1 only). Older SpeedFax editions (2010-2014) should be checked for original P1 connector kits.
LEAD-0062	2	**Revised P1 main breaker kits with breaker (MBK...A with amp rating)** — SpeedFax p.11-14 lists ~47 factory kits with breaker included (MBKED3100A, MBKQR1125A..MBKQR3225HA, MBKVAM3150A..MBKVAH3400A, MBKFD3150A..MBKFD3250A, MBKJD1300A..MBKJD32400A). These are referenced in 'replacement' notes on strap-kit records but not catalogued individually in this batch. Canadian equivalents (MBKQR12225A, MBKFD33250A, MBKJD33400A, MBKHF33250A, MBKED33100A) in SI-LP-1633. Docs: SPEEDFAX p.11-14, SI-LP-1633
LEAD-0069	2	**Square D KA/KH lug kit supersession and FY/E-frame/QB-QD-QG-QJ lugs** — 2012 Digest lists AL250KA only against KI; KA/KH lists need older Digest (e.g., Digest 172/173) or instruction bulletins. No E-frame (EDB/EGB/EJB) or Q2/QB lug kits located; 2012 Digest notes threaded insert kit for EDB/EGB/EJB/FJA (table text partly garbled). Docs: Digest 172, Digest 173
LEAD-0070	2	**Square D lug-kit instruction bulletins** — 48940-221-02 (H/J lug kits) and AL100FA4 instructions exist; download blocked (se.com 403). Would give torque values and kit contents. Docs: 48940-221-02
LEAD-0071	2	**Current 0611CT1001 v5.0 (2024) PowerPact H/J/L catalog** — Verify whether 2013 lug tables (esp. column-scrambled CU L-frame rows in Table 121) changed; check PDC3JD20 vs PDC3JD2. Docs: 0611CT1001
LEAD-0074	2	**GE TCAL28 / TCAL38 / TCAL39 / TCAL51 / TCAL62 not found** — These numbers appear in the batch scope but are not in the GE BuyLog 2008 excerpt or the 2012, 2013 or 2019 lug tables. TCAL28 may be confused with TCAL28PD1/PD3 (SF power distribution lugs). Older GE lug numbers (TCAL2x/3x for the 1980s-90s TF/TJ lines) may appear in GEP-1100 / GET-xxxx renewal catalogs or older BuyLog editions (pre-2008). Docs: GEP-1100
LEAD-0075	2	**GE footnote digits fused into part numbers** — The pdftotext extraction of GE BuyLog runs footnote superscripts into part numbers (TCAL1212 = TCAL121 + fn2, TCAL811 = TCAL81 + fn1, TCLK3652 = TCLK365 + fn2, SKLVK6 = SKLVK + fn6, etc.). Base numbers were reconciled across the 2012 and 2019 editions (different footnote numbering). TCAL122, TCALK2122/3122, TCAL91, TCALK291/391, TCAL131 and 789A448G3 are inferred bases (conf B/C). Check them against distributor or ABB product pages. Docs: BuyLog Section 6 Rev 1/19, BuyLog Section 3 Rev 9/12
LEAD-0076	2	**Siemens QJ2 / pre-Sentron ITE lug kits** — SPEEDFAX 2017/2021 no longer lists QJ2, so the only QJ2 lug found is TA1Q300 (distributor). Old ITE numbers such as TA1D/3TA1D/TA1E/TA1F/TA1G/TA2DS/TA3J6500/TA2P400 were not found in the 2017 tables. Search older SPEEDFAX editions (e.g. SPEEDFAX 2004-2011, Section 7) and ITE 'Breaker Lug Selection' leaflets. Docs: SPEEDFAX 2011 Section 7
LEAD-0083	2	**Breaker King / PCS aftermarket FPE kits** — PCS (manufacturer of NEF1K/NEJ1K/NFJ1K/NJL1K/NEF3K/NEJ3K/NJL3K/NFJ3K) - identify company (Power Circuit Specialists?), obtain installation instructions and confirm listing status.
LEAD-0084	2	**Breaker King Obsolete Breaker Guide PDF** — Linked PDF https://www.breakerking.com/catalog/breaker_king_obsolete_book.pdf returned an HTML page to curl; try browser/WebFetch.
LEAD-0086	2	**Square D / Siemens retrofit interiors for FPE and Zinsco** — Forum posts say Square D (NQ/NF) and Eaton build custom interiors to fit existing enclosures; find Schneider 'retrofit panelboard' or 'replacement interior' literature and any listed-for-enclosure marking practice.
LEAD-0087	2	**Schneider/Federal Pioneer FAQs on FPE replacement breakers** — se.com FAQ000278110 and FA234570 blocked (403). Retrieve via browser to capture exact wording on NBLP/NB and CDP.
LEAD-0088	2	**Zinsco/Sylvania commercial panelboard catalogue** — Need GTE-Sylvania/Zinsco catalogue for QSF and double-slot/single-slot split-bus distribution panelboards, DSL* kit numbering (are DSL*/QSF*DS/SB OEM numbers or relectric dealer numbers?), and Sylvania SE/SEH/SC/SJD/SKM kit compatibility.
LEAD-0089	2	**Challenger PM4a/PM4b panelboard documentation** — Identify Challenger panelboard types (PM4a, PM4b) and the breaker frames for C?D?K kits; check whether Eaton KPRL4C*/KPRL4AC*/KPRL4BC* kits are Eaton OEM conversion kits for Challenger breakers in PRL4. Possibly overlaps Eaton batches (B0001/B0002).

Lead	Pri.	Topic / detail
LEAD-0095	2	**Eaton KB/KL/KCDP/KFDP/1C96608 kit instruction leaflets not public** — No Eaton instruction leaflet or SKU page exists online for KB* vertical main breaker kits, KL* lug kits, KCDP*, KFDP* or 1C96608/2C11642/1C96609 branch assemblies (skuPage 404 on Eaton mirror). Kit ILs ship in the box: obtain physical kits or Eaton satellite-plant copies to capture strap dimensions/torques.
LEAD-0096	2	**Eaton SPX0361126 project O&M manual (585 pp) on ManualsLib** — ManualsLib manual 1538842 'Eaton Pow-R-Line SPX0361126' compiles IM01500001E (2011), Pow-R-Line panelboard renewal parts (Feb 2009) and switchboard unit data incl. 'Circuit Breaker Mounting Bolt Drilling Plan' (p.413) and 'Branch Devices' (p.363). Curl/manualzz blocked (403); WebFetch works page by page. Docs: SPX0361126
LEAD-0100	2	**Siemens US SPEEDFAX Section 12 switchboard branch kit table** — Locate SPEEDFAX (2017-2021) Section 12 switchboard 'distribution section branch mounting kits' page (SB1/SB2/SB3, CDP6/FC) for US catalog numbers and breaker compatibility; distributordatasolutions 2021q3/q4 documents host Section 11 - try sibling document hashes for Section 12.
LEAD-0101	2	**Eaton cooperindustries.com mirror** — cooperindustries.com mirrors eaton.com DAM and skuPage URLs (www.eaton.com times out from container). Use it for Eaton switchboard ILs (e.g. Pow-R-Line C/i branch device instructions, IL 29C101H breaker leaflets) and for current RP01400001E.
LEAD-0104	2	**I-Line plug-on data bulletin 0600DB1004 and SL250/SL800M5/SL1200P5-P7 instruction bulletins** — 0600DB1004 (12/2010) blocked on se.com. SL400 IB 48040-651-03 found via graybar.com (Salsify CDN) - same route likely works for SL250/SL800M5/SL1200Px product pages on graybar.com (search page is JS; need product page URLs). docs.steinerelectric.com hosts Schneider instruction sheets (e.g. Schneider_Electric_HCM18736MP_Instruction_Sheet.pdf) but its TLS certificate is expired (not fetched). Docs: 0600DB1004, 48040-651-03
LEAD-0105	2	**I-Line HCM/HCR-U neutral bonding straps 80043-446-06, 80121-082-02, 80010-600-01, hardware kit BBV57291** — Seen only in search-result summaries of se.com FAQs FA225933/FA117902/FA339459 (403 on fetch). Would add neutral bonding strap part numbers for HCR-U with/without neutral CT. Docs: 80043-446-06, 80121-082-02, 80010-600-01, BBV57291
LEAD-0106	2	**Current ABB BuyLog Section 11 Panelboards (2021/2022, ReliaGear neXT, "Spectra (obsoleted) bolt-on panelboard mounting hardware" p.11-63)** — electrification.us.abb.com PDF: curl HTTP/2 INTERNAL_ERROR / empty reply, WebFetch 503. pdf4pro.com has a text preview (TOC confirms p.11-63 Spectra obsoleted bolt-on hardware) but download is 403. ABB quick-selector guide (simplebooklet) gives the retrofit-kit table; product-number columns of its Spectra renewal tables are images.
LEAD-0107	2	**Tmax XT Spectra retrofit kit (SRFB/SRFN) installation instructions** — No instruction document number found; empower lists SRFB kits only inside breaker cross-reference entries (e.g. Tmax27292). Need kit contents, strap part numbers and torques.
LEAD-0114	2	**GE AV-Line Switchboards publication GEA-7931** — Cited in 'Electrical Wiring and Design' (1983). Search archive.org/HathiTrust/eBay for GEA-7931 and AV-Line instruction books (GEH-xxxx). Docs: GEA-7931
LEAD-0115	2	**Electrozad 1985 (Copel) price book - full ITE-Siemens / Square D / Federal Pioneer panelboard pages** — archive.org lending item; borrow to read full NLAB/NHB/HR-7 selector tables, Square D NQO/NQOB/NYIB accessory list (more SF-/LK- part numbers) and Federal Pioneer NALP/NBLP.
LEAD-0116	2	**Schneider FAQs on NQO/NQOB/NEHB/NA1B/NY1B (blocked 403)** — Read individually to map statements to FAQ numbers: FA97632, FA124608, FA232958, FA87904, FA100575, FA332061, FAQ000266417, FA129512, FA119163, FA122757, FA166748, FA121261, FA125651, FA128561.
LEAD-0117	2	**Cutler-Hammer pre-1994 switchboard designations** — Only MP2 / MP-200 (group-mounted) and Type ES (existing family) found. 'Type MS' and Pow-R-Line predecessors for Cutler-Hammer switchboards not confirmed. Search ECM 1965-1990 issues on archive.org for Cutler-Hammer switchboard ads.
LEAD-0121	2	**Square D Digest 152 (1970) further mining** — Only panelboard index/accessory pages were mined. Pages 56-83 contain full NQO/NQOB/NA1B/NH1B/I-Line/QMB interior, box and front catalog numbers (e.g. HCN-0936-1M interiors, MTX cable ducts, QMB-1832-2 interior) and the Q1/QO breaker tables; Section 600 breaker catalog referenced. Docs: Digest 152
LEAD-0124	2	**Dealer MP40 numbers MP40ED225-3, MP40KL400-3, MP40CHH, MP403XBLANK not in RP01400003E (Feb 2013)** — OEM Table 22 lists MP40KF100-2/-3, MP40KF225-2/-3, MP40KC225-2/-3, MP40KCHH225-2/-3, MP40KJ225-3, MP40KK400-3, MP40KL600-3, MP40KLL400-3, MP40KM800-3, MP40KN1200-3; fillers MP40FC-nX. Dealer numbers may be pre-2013 Sumter numbers (an earlier RP01400003E edition or PL01400003E Jan 2008 would settle it). Docs: RP01400003E, PL01400003E
LEAD-0125	2	**RP01400003E typesetting anomalies to confirm with Sumter (803-481-6677)** — 39-3613-16 and 39-3613-27 (all other PB/PH deadfront kits are 99-3613-xx); bare "99-3613" for PH 42-pole 400 A MLO; EEFBP6T2 / EEFBP10T2 vs EEFPB pattern; PB row "30 poles 255 A" (probably 225 A); PB 15 in MLO 3-ph 30 poles "225 400" A. Docs: RP01400003E
LEAD-0126	2	**Pow-R-Line C / Pow-R-Line i switchboard branch connector or provision kit catalog numbers - still none found** — No PRL-C/PRLi branch connector kit numbers appear in IM01500001E, CA08104001E Tab 21, or Eaton skuPages; distributor (automa.net) "KPRL3AED3POA" naming as PRL-C is unverified. PRL-C distribution sections use panelboard-type (PRL4) chassis; KPRL4* kits may apply but no OEM statement found. Ask Sumter aftermarket. Docs: IM01500001E, CA08104001E
LEAD-0130	2	**Siemens 6CLE2C / 6CLF1C ('C' suffix) strap kit variants** — Lumen (Canada) lists 6CLE2C (125 A CED6 twin) and 6CLF1C (250 A CFD6 single) besides 6CLE2/6CLF1. Relationship (Canadian/copper variant? supersession?) unknown; no OEM document found.
LEAD-0131	2	**BNK2 instruction 12-A-1085-01 missing from bucket** — SIE_IS_BNK2_12-A-1085-1.pdf in dcc-data-extract is a stored SharePoint error page (HTML), not the PDF. Find another copy (distributor sites, Siemens SIOS). Docs: 12-A-1085-01
LEAD-0134	2	**SPEEDFAX 2011 Section 13 remaining pages** — USESI_93254_catalog.pdf holds only pp.13-11..13-20 of SPEEDFAX 2011 Section 13 (Switchboards). The rest (SB1/SB2/SB3 main and branch device tables, SMM metering) not found; search assets.usesi.com product-media catalogs for adjacent USESI_932xx files. Docs: SPEEDFAX 2011 Section 13

Lead	Pri.	Topic / detail
LEAD-0139	2	**Supplemental and Obsolescence Digest Section 4 (Panelboards) full PDF** — 2009 Digest Sec.13 (s24) refers to 'Supplemental & Obsolescence Digest, Section 4' for NQOD door-in-door trims and other legacy items. Only the DigestPLUS online viewer shell was found (productinfo.schneider-electric.com/nadigest/viewer/5cc35b7ed6593c0001ba8661/5cc36299d6593c0001baa700). Try download.schneider-electric.com p_Doc_Ref guesses or a distributor mirror; earlier Digest 175/176 Section 13 copies may also exist on distributor hosts (search 'Obsolescent Panelboards 13-1'). Docs: Supplemental Digest Section 4
LEAD-0140	2	**NQ fingersafe IB 80043-831-01 and drip-hood IB 80043-401-03** — All fingersafe replacement-part bulletins (80043-817/818/820/822/826-01) defer removal/installation of trim and deadfront to 80043-831-01; I-Line drip hood kits HCT2DH* reference 80043-401-03. Neither downloaded yet (download.schneider-electric.com/files?p_Doc_Ref=<n> works with browser UA). Docs: 80043-831-01, 80043-401-03
LEAD-0147	2	**ABB Spectra to Tmax XT smart cross-reference and plug-in (APN) retrofit kits** — new.abb.com page 'Tmax XT Retrofit Kits for Spectra Plug-in Panelboards and Switchboards' and empower.abb.com eCatalog returned 503. Capture full kit list for plug-in Spectra (APN) and the frame/rating-plug cross-reference table.
LEAD-0148	2	**Schneider Electric retrofit FAQs and retrofit form (se.com 403)** — Read FA239605, FA124771, FA116402, FA283569, FA339443, FA129258 directly and obtain the Square D retrofit form; confirm whether 'RTI' 14 in NQ interiors have distinct catalog numbers and whether I-Line retrofit for competitor switchboards is offered. Docs: FA239605, FA124771, FA116402, FA283569, FA339443, FA129258
LEAD-0149	2	**Connecticut Electric current UBI catalog (post-2005) incl. bolt-on UBIF...NB, UBIFPE NE-frame, 3-pole UBIF3xxN** — 2005 sheet lists only plug-in NA/NC, Pushmatic and Zinsco Q/QC/R/RC. Resellers cite UBIF340N, UBIF380NB, UBIFPE1003 and BRK-FPE-001 alias 'UBIF...NB'. Obtain current catalog and listing/classification documents (ETL file numbers).
LEAD-0153	2	**Square D NQ/NQOD back-fed QOB main hold-down** — NQ catalog 1640CT0801 states 100 A QOB back-fed mains are factory assembled; no field retaining kit number found for NQ/NQOD (loadcenter PK2MB/PK3MB/PK5RK/PK4MB2xA found in Digest Section 1). Find Digest Section 9 NQ accessories table (0100CT2401-SEC-09, se.com blocked) or NQ instruction bulletin for retainer part. Docs: 0100CT2401-SEC-09, 1640CT0801
LEAD-0154	2	**Eaton PRL1a/1X back-fed BAB/QBHW main hold-down** — No OEM hold-down/retainer kit number found for back-fed BAB/GHB mains in Pow-R-Line panels (loadcenter kits BJHDS / BREQS125CS / CH125RB seen only on distributor/retail listings). Check CA08100003E Tab 3 and PRL1X instruction leaflets. Docs: CA08100003E
LEAD-0155	2	**GE A-Series THQB/TEY back-fed main retainer** — No GE retaining kit found in BuyLog Sections 6/11. Search GE A-Series instruction DEH-series for back-fed main hold-down.
LEAD-0163	2	**Spectra bolt-on/plug-in kits for Record Plus FB/FC/FG - DEH-41123/41124/41125 (FB), DEH-40402/40425 (FC), DEH-40419/40420/40426/41047 (FG)** — Instruction numbers taken from BuyLog Sec 6 Rev 1/19 frame publication lists (pp.6-71, 6-75, 6-85 approx.). Not on manualsdir.com GE Industrial Solutions listing (695 manuals crawled) and not found by web search; would give AMC/AMCB...FB/FD/FG kit contents and torques. Docs: DEH-41123, DEH-41124, DEH-41125, DEH-40402, DEH-40425, DEH-40419, DEH-40420, DEH-40426, DEH-41047
LEAD-0164	2	**GEH-5588 / GEH-5630 (Type AML main lug and feed-thru lug kits) still not found** — Not in manualsdir GE listing; ABB library ID unknown; DocumentID=GEH5588/GEH-5588 returns 404 on search.abb.com. Docs: GEH-5588, GEH-5630
LEAD-0165	2	**GE plug-in mounting base instructions GEH-4610 / GEH-4342 / GEH-5655 and back-connected stud GEJ-3609/3635/3619, GEH-5665** — Would give stud dimensions, drilling plans and torque for TE/TF/TJ/TK..PD bases and TMP/SMP plates (BuyLog says drawings are available for customers fabricating their own plates). Docs: GEH-4610, GEH-4342, GEH-5655, GEJ-3609, GEJ-3635, GEJ-3619, GEH-5665

The complete backlog is maintained in research/BACKLOG.md.