
INSTALLING THE BREAKER:

17. Refer to Figure 11 and orient the prepared breaker such that the “ON”-side (with Bus Extensions) fits onto the top of the straps and the “OFF”-side sits properly on the Breaker Mounting Bracket (Item 5).
18. Fasten the breaker to the Breaker Mounting Bracket (Item 5) with two #8-32 screws (part of Item 15). (NOTE: Some breakers are packaged with a pair of Breaker-Mounting Screws. If this occurs, dispose of the pair that shipped with the breaker and use the pair from this kit.)
19. Align the Bus Extension (part of Item 15) holes with the holes in the Straps (Items 1, 2 and 3) and fasten with one 5/16”-18 screw (part of Item 15) per phase.

Figure 11

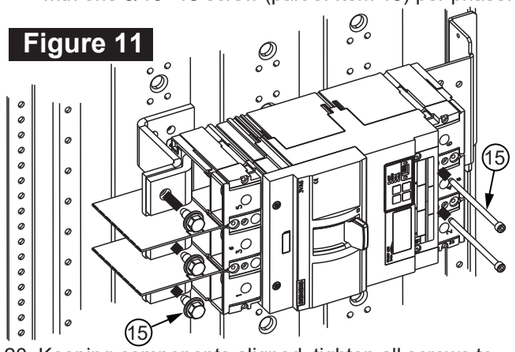

20. Keeping components aligned, tighten all screws to the torque values specified on the back of the deadfront (or the table on Page 2).

INSTALLING THE NEUTRALS:

21. If this kit is installed in a panelboard with a neutral, refer to Figure 12a and install the Panelboard Branch Neutral Lug Assembly (Item 13). Locate on the Branch Neutral at either the top or bottom of the Z-rails. Lug can be mounted on either side of the Branch Neutral, depending on cable feed location.





Figure 12a

Figure 12b




22. If this kit is installed in a switchboard with a neutral, refer to Figure 12b and install the Switchboard Branch Neutral Lug Assembly (Item 14). It can be mounted as shown or on any available hole of the branch neutral, depending on cable feed location.
23. Keeping components aligned, tighten all screws to the torque values specified on the back of the deadfront (or the table on Page 2).

INSTALLING THE DEADFRONT:

NOTE: Provision Filler Plate Assembly (Item 16) is not part of kits KS3VA53T or KS3VA53TD. Skip Step 24.


24. If a provision is in place, refer to Figure 13a and install the Provision Filler Plate Assembly (Item 16) in the appropriate Cover Plate (Item 6) opening. Place a screw into each of the two corner square holes and locate the filler plate onto the front of the Cover Plate, with the label facing out. Then, fasten two lock nuts onto the screws from the rear of the Cover Plate.

Figure 13a

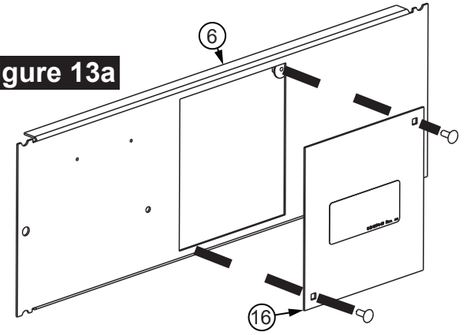

25. If the breaker is in place, refer to Figure 13b and position the Cover Plate (Item 6) over the 6.25” unit space and fasten with four 1/4”-20 screws (Item 7) onto the deadfront rails, one at each corner.

Figure 13b

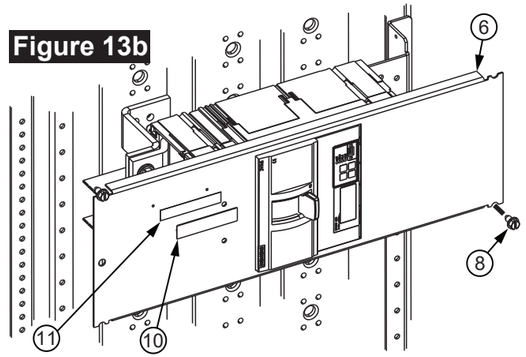

26. Mark the I.D. cards (Item 11) as desired and place onto the rear of Card Holder (Item 10), with the marking facing out. Attach this subassembly to the Cover Plate (Item 6) by aligning and pushing the Card Holder pins (Item 10) into the appropriate pair of holes in the Cover Plate (Item 6).

FINAL PREPARATION:

27. **Before energizing the equipment**, ensure that the deadfront, barriers and fillers are in place and secure, and that all the covers are properly installed.

These instructions do not purport to cover all details or variations in equipment, or to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise, which are not covered sufficiently for the purchaser’s purposes, the matter should be referred to the local Siemens sales office. The contents of this Instruction manual shall not become part of or modify any prior or existing agreement, commitment or relationship. The sales contract contains the entire obligation of Siemens. The warranty contained in the contract between the parties is the sole warranty of Siemens. Any statements contained herein do not create new warranties or modify the existing warranty.

Trademarks - Unless otherwise noted, all names identified by ® are registered trademarks of Siemens AG or Siemens Industry, Inc. The remaining trademarks in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owner.

SIEMENS

Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA53T / S3VA53TD*

for Single-Mount 3VA53 / 3VA63 Breaker

Installation Instructions

For factory-installed provisions, verify that the strap kit contains bus extensions. (See Figure 8 on page 3 for reference.) If bus extensions are not included, kit **S3VA53PR** is required, one kit per breaker. Consult Siemens Sales for more details.

* This instruction sheet can also be used as reference for these two Panel Builder kits: **KS3VA53T** & **KS3VA53TD**

These two kits will ship with all the same components as kits **S3VA53T** & **S3VA53TD** except for: nut keepers & provision filler plate assemblies

Nut keepers must be purchased with the breaker. Order options are:
for 3VA53/63 breakers: **3VA9473-0QA00** (kit of 3)
or factory-installed on the breaker by using a “2” as the 12th character in the breaker order: (Ex.: **3VA53405EC320AA0**)

Additionally, when installing a factory-installed provision, nut keepers must be purchased with the breaker

Hardware Key:
(nominally to scale)



Item # 7 **Item # 8**

Item # 9 : This is composed of four sets of different length screws. Instruction card 11-B-1009-01 is included, to guide the user on which screw length to use, depending on bus laminations.

Item numbers above reference the table on pg. 2

15-A-1078-01 Rev. 00

Installation Instructions

The following instructions are for the installation of a Siemens **3VA** branch breaker kit for **400A MAX 3VA53 (MJAS**, **HJAS**, **CJAS)** or **400A MAX 3VA63 (MJAE**, **HJAE**, **CJAE**, **LJAE)** breakers in Distribution Switchboards or Type P4 (shallow) / or Type P5 (deep) Panelboards. The parts provided in this kit are for connections to a 3-phase, 3 or 4-wire system. This kit requires 6.25" of unit space. The deadfront will need a blank filler plate if this kit does not completely fill the unit space of any removed branch module(s). For systems without neutrals, disregard the neutral connection.

The breaker is NOT included with this kit and must be purchased separately. Be sure to order the appropriate breaker for the specific application.



⚠ DANGER

Hazardous voltage. Will cause death or serious injury.


Keep out.
Qualified personnel only.
Disconnect and lock off all power before working on this equipment.

1. **First**, **lock off power supplying this equipment.**

PANELBOARD PREPARATION:

2. Remove the (2) gutter covers and cover plates.

Figure 1






Figure 2

3. This kit requires 6.25" of empty unit space. To locate the mounting position, measure from the top deadfront support to the top of the empty unit space filler on the deadfront. Transfer this dimension from the deadfront support along the Z-rail and mark. This will be the unit space as shown on Fig. 3. After marking the Z-rail, remove the deadfront.

4. If an existing branch module occupies this location, remove all of its devices, components and parts.

5. Open the shipping box and check the contents: (refer to bottom of page 1 for **KS3VA53T** or **KS3VA53TD**)

ITEM	DESCRIPTION	QTY	TORQUE
1	B-phase Strap *	1	N/A
2	A/C-phase Strap, Short *	1	N/A
3	A/C-phase Strap, Long *	1	N/A
4	Long Strap Barrier *	1	N/A
5	Breaker Mounting Bracket *	1	N/A
6	Cover Plate	1	N/A
7	1/4"-20 x 7/16" SHWHSW	4	72 lb-in
8	1/4"-20 x 1/2" SHWHSW	2	72 lb-in
9	Strap-section Bus Hardware Kit	1	***
10	Card Holder	1	N/A
11	Circuit I.D. Card	1	N/A
12	Plastic Tree Rivet	3	N/A
13	Panelboard Branch Neutral Lug Assy.	2	N/A
14	Switchboard Branch Neutral Lug Assy. **	2	N/A
15	Breaker Provision Kit	1	N/A
16	Provision Filler Plate Assembly	1	N/A
17	Provision Phase Barrier Assembly *	1	N/A

* Deep or shallow components, based on kit ** Deep kits only
*** 50 lb-in for Aluminum bus; 72 lb-in for Copper bus

INSTALLING THE STRAPS:


The B-phase set of straps MUST be properly taped together in P4 applications.

6. Refer to Figure 3 to position the B-phase Strap (Item 1) vertically centered in the unit space, with the three-hole end sitting on the B-phase bus. Loosely attach the B-phase Strap (Item 1) to the B-phase bus with two 1/4"-20 screws (from Item 9), following the instructions that are supplied with the Strap-section Bus Hardware Kit (Item 9).

7. Position and loosely secure the other two straps (Items 2 and 3) on either side of the B-phase Strap (Item 1) in a similar fashion.

8. Keeping components aligned, tighten all screws to the torque values specified on the back of the deadfront (or the table on this page).

Figure 3

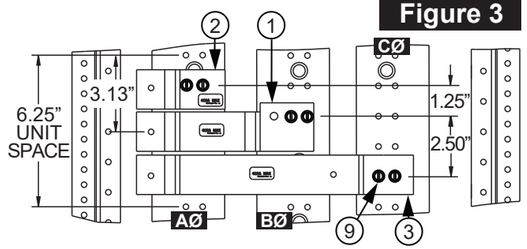

9. Refer to Figures 4a and 4b, and attach the Strap Barrier (Item 4) to the Long Strap (Item 3) by inserting a Plastic Tree Rivet (Item 12) through the barrier and into the strap.

Figure 4a
(for 400A P4)


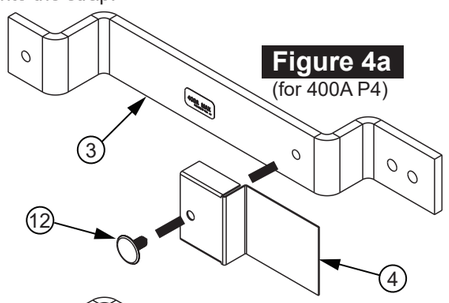



Figure 4b
(for 400A P5/SB)

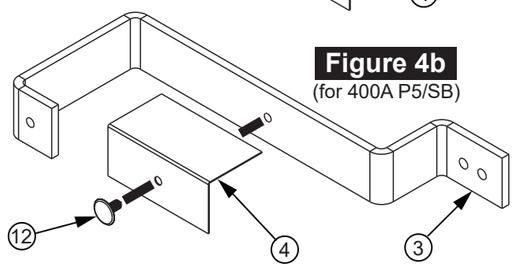

INSTALLING THE BREAKER MOUNTING BRACKET:

10. Refer to Figure 5 and assemble the Breaker Mounting Bracket (Item 5) to the base rail with two 1/4"-20 x 7/16" Screws (Item 7).

Figure 5

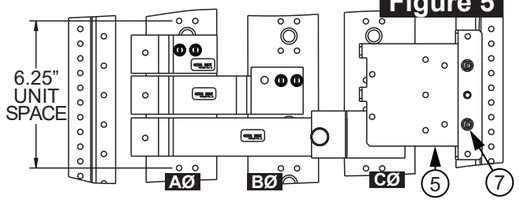

INSTALLING THE PROVISION PHASE BARRIER:

Provision Phase Barrier MUST be in place for provisions or until breaker is mounted. If breaker is available, skip to "BREAKER PREPARATION" section.

11. Refer to Figures 6a and 6b and assemble the Phase Barrier (from Item 17) to the Phase Bracket (from Item 17) using two Plastic Tree Rivets (Item 12), as shown.

Figure 6a
(for 400A P4)

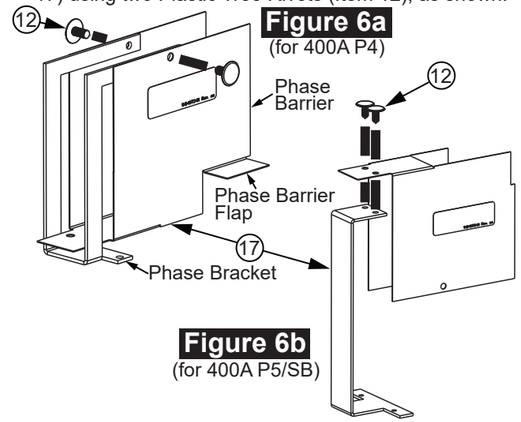


Figure 6b
(for 400A P5/SB)

12. Refer to Figures 7a, 7b and 8 and assemble the Phase Barrier Assembly (Item 17) to the base rail opposite the Breaker Mounting Bracket (Item 5) using two 1/4"-20 x 7/16" Screws (Item 7). The Phase Barrier should properly separate the three phases, as shown below. Note: For P4 panels, the Phase Barrier Flap should be folded such that it sits on top of the long strap.

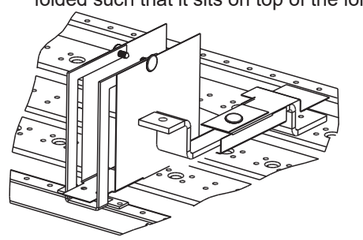



Figure 7a
(for 400A P4)

Figure 7b
(for 400A P5/SB)



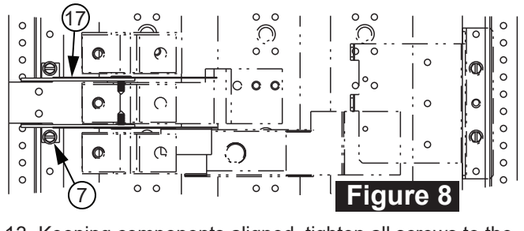


Figure 8

13. Keeping components aligned, tighten all screws to the torque values specified on the back of the deadfront (or the table on page 2).

BREAKER PREPARATION:

(refer to pg. 1 for more details about Notes 1 and 2 and refer to Figures 9 and 10)

NOTE #1: Nut keepers are NOT components of kits KS3VA53T or KS3VA53TD.

NOTE #2: If breakers are ordered and received with the nut keepers pre-installed, then:

a) May require Nut Keeper removal on the "OFF" end prior to breaker lug installation.

b) Leave the Nut Keepers on the "ON" (1,3,5) side, and skip to step 15.

14. Slide a Nut Keeper (part of Item 15) under each phase of the breaker stabs on the "ON" side of the breaker. They "click" into place when properly inserted.

15. Place Bus Extension (part of Item 15) on top of each phase of the breaker stabs and loosely secure with a 3/8"x16 Socket Head SEMS Screw (part of Item 15). Note that the anti-rotation features on the bottom of each Bus Extension nestle over the breaker stab.

16. Refer to Figures 9 & 10 and locate the Phase Barriers that ship with the breaker and cut in half along the score line down the middle. Orient each half as shown, and slide into the "ON" end of two breaker slots until they lock into place.


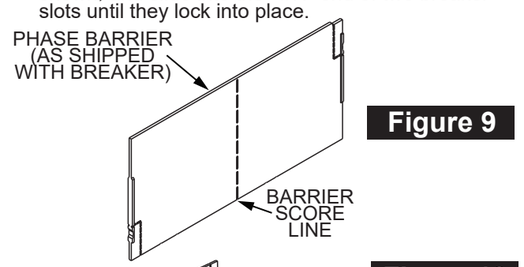


Figure 9

Figure 10

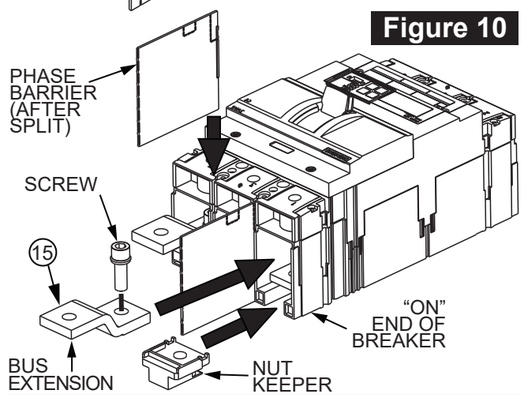

(CONTINUES ON PAGE 4)

15-A-1078-01 Rev. 00