TECHNICAL REFERENCE LIBRARY

Master Electrical Distribution Hardware Catalogue

Panelboards · Switchboards · Circuit Breakers · Mounting & Connection Hardware

Identification · Compatibility · Supersession · OEM Documentation

Edition 0.1

Generated 2026-10-21 from database build 240c5e4

1344 hardware entries · 50 equipment families · 97 breaker families · 119 sources

Manufacturer lineages covered

EAT — Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant

SQD — Square D, Schneider Electric, Federal Pioneer (Canada)

GEA — General Electric Industrial Solutions; ABB from 2018; ReliaGear

SIE — Siemens, ITE, ITE Imperial, Gould, Murray

Independent research reference. Not affiliated with or endorsed by any manufacturer named. Trademarks belong to their owners. Compatibility statements carry evidence classes A–D; only class A is manufacturer-documented. Verify before installation.

Document Control

Item	Value
Edition	0.1
Generated	2026-10-21
Database build (git)	240c5e4
Hardware entries	1344
Equipment families	50
Breaker families	97
Sources registered	119
Documents preserved in library	49
Open research leads	62

Revision history (research batches merged)

Batch	Research date	Merged	New parts	Updated	New sources
B0006-siemens-ite	2026-10-21	2026-10-21	244	0	15
B0005-ge-abb	2026-10-21	2026-10-21	280	0	22
B0002-eaton-switchboards-legacy	2026-10-21	2026-10-21	127	0	14
B0001-eaton-prl-panelboards	2026-10-21	2026-10-21	333	89	11
B0004-squared-switchboards	2026-10-21	2026-10-21	176	1	49
B0008-breaker-terminal-kits-ge-siemens	2026-10-21	2026-10-21	184	0	8

This catalogue is generated automatically from the structured parts database (*data/* → *build/edh_catalogue.sqlite*). Corrections must be made in the database, never in this PDF. Catalogue identifiers (EDH-…, FAM-…, BRK-…, SRC-…) are permanent and are never reused.

Table of Contents

Document Control 2

1 How to Use This Catalogue 6

2 Hardware Identification Guide 7

2.1 Anatomy of a panelboard interior . . . 7

2.2 Breaker mounting styles . . . 7

2.3 Branch connector straps — what to measure . . . 8

2.4 Terminal lug types . . . 8

3 Eaton lineage 14

3.1 BR — Type BR loadcenter . . . 15

3.2 CDP — Westinghouse CDP / HCDP panelboard . . . 19

3.3 FDP — Westinghouse FDP fusible panelboard . . . 44

3.4 NAB — Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards . . . 50

3.5 NLAB — Westinghouse NLAB lighting panelboard . . . 50

3.6 PRC — Pow-R-Command lighting control panelboard . . . 51

3.7 PRL-LX — Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX) . . . 51

3.8 PRL1/PRL2 — Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage) . . . 51

3.9 PRL1A — Pow-R-Line 1a . . . 57

3.10 PRL1X — Pow-R-Line Xpert 1X . . . 130

3.11 PRL2A — Pow-R-Line 2a . . . 143

3.12 PRL2X — Pow-R-Line Xpert 2X . . . 144

3.13 PRL3 — Westinghouse Pow-R-Line 3 panelboard (vintage) . . . 144

3.14 PRL3A — Pow-R-Line 3a . . . 146

3.15 PRL3E — Pow-R-Line 3E . . . 168

3.16 PRL3X — Pow-R-Line Xpert 3X . . . 168

3.17 PRL4 — Pow-R-Line 4 panelboard (PRL4B / PRL4F) . . . 178

3.18 PRL4X — Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F) . . . 209

3.19 PRL5P — Pow-R-Line 5P plug-on distribution panelboard . . . 210

3.20 WEB — Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards . . . 218

3.21 ES — Cutler-Hammer Type ES switchboard . . . 218

3.22 IFS — Integrated Facility System switchboard . . . 218

3.23 PRLC — Pow-R-Line C switchboard . . . 218

3.24 PRLCS — Pow-R-Line CS switchboard . . . 219

3.25 PRLi — Pow-R-Line i switchboard . . . 220

3.26 WF/WRP — Westinghouse WF/WRP switchboard . . . 220

4 Square D / Schneider Electric 225

4.1 I-LINE — I-Line Circuit Breaker Panelboard / I-Line distribution section . . . 225

4.2 QMB — QMB Fusible Panelboard / QMB distribution (current design, Series E1) . . . 235

4.3 QMB-LEGACY — Legacy QMB distribution (pre-October-1984 QM and QW interiors) . . . 282

4.4 QED-2 — Power-Style QED-2 Switchboard . . . 289
4.5 SPEED-D — Speed-D Merchandised Service Section Switchboard . . . 294

5 GE / ABB lineage 295

5.1 A-SERIES — A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU) 295
5.2 A-SERIES-COL — A-Series Column Panelboards (ALC, AQC, AEC) . . . 312
5.3 A-SERIES-PWR — A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N') . . . 312
5.4 CCB-QMR — Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts) . . . 325
5.5 NHB — NAB / NHB bolt-on panelboards (legacy) . . . 330
5.6 RG-NEXT — ReliaGear neXT Power Panelboards . . . 331
5.7 SCP-PLUS — Spectra Series Type SCP Plus panelboards . . . 331
5.8 SPECTRA-PP — Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB) . . . 336
5.9 AV-LINE — AV-Line switchboards (legacy) . . . 396
5.10 Breaker-mounted terminal kits and accessories . . . 396
Breaker family E150 line (TEB, TED, THED, TEC) . . . 396
Breaker family F225 line (TFJ, TFK, THFK, TFC) . . . 400
Breaker family J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) . . . 403
Breaker family K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) . . . 406
Breaker family Record Plus FB 100 . . . 419
Breaker family Record Plus FE 250 . . . 421
Breaker family Record Plus FG 600 . . . 424
Breaker family Spectra RMS SE150 . . . 425
Breaker family Spectra RMS SF250 . . . 428
Breaker family Spectra RMS SG600 . . . 431
Breaker family Spectra RMS SK1200 . . . 435
Breaker family TQD / THQD (Q-Line 225A) . . . 439

6 Siemens lineage 440

6.1 P1 — Type P1 (original) . . . 440
6.2 P2 — Type P2 panelboard . . . 449
6.3 P3 — Type P3 panelboard . . . 461
6.4 P4 — Type P4 / S4 / Sentron SPP (10in deep) power panelboard . . . 466
6.5 P5 — Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard . . . 481
6.6 RP1 — Type P1 (Revised P1) . . . 499
6.7 S1/S2 — Type S1 / S2 lighting panelboards . . . 532
6.8 SE — Type SE panelboard . . . 534
6.9 CDP6 — Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage) . . . 534
6.10 SB — Type SB1 / SB2 / SB3 distribution switchboards . . . 547
6.11 Breaker-mounted terminal kits and accessories . . . 552
Breaker family BL . . . 553
Breaker family ED (ED2/ED4/ED6/HED4/HHED6) and CED6 . . . 554
Breaker family FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) . . . 558
Breaker family JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) . . . 560

Breaker family LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) . . . 564
Breaker family MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 . . . 565
Breaker family NGG / HGG / LGG (G-frame bolt-on/lug) . . . 574
Breaker family QJ2 / QJH2 / QJ2-H / HQJ2H . . . 575
Breaker family QR2 / QRH2 / HQR2 / HQR2H . . . 576
Breaker family Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) . . . 577
Breaker family Sentron RD (RD6, RXD6, HRD6, HRXD6) . . . 578

7 Breaker Family Register 579

8 Cross-Reference Tables 598

8.1 Supersession and alternate numbers . . . 598
8.2 Replacement and successor statements . . . 605
8.3 Companion parts required for installation . . . 606

9 Indexes 608

9.1 Manufacturer index . . . 608
9.2 Equipment family index (including aliases) . . . 608
9.3 Part-number index (primary and alternate numbers) . . . 616
9.4 Breaker compatibility index . . . 661
9.5 Component-type index . . . 694
9.6 Rating and pole index . . . 698
9.7 Physical dimension and hole-pattern index . . . 712

Appendix A Documentation Library 723

Appendix B Bibliography and Source Register 727

Appendix C Research Status and Open Questions 733

1 How to Use This Catalogue

The catalogue is organised by **manufacturer lineage**, then **equipment family** (panelboard, switchboard or loadcenter series), then **component type**. Every hardware item has a permanent catalogue identifier of the form **EDH-<MFR>-nnnnn**.

To identify an unknown part: (1) establish the manufacturer and equipment family from the enclosure nameplate, interior label or breaker type; (2) use Section 2 to decide the component type from its function and mounting style; (3) look up any stamped number in the Part-Number Index (partial numbers are listed in normalised alphanumeric order); (4) if no number is legible, use the Breaker Compatibility Index and the identification-feature table to narrow candidates, then compare dimensions and hole patterns against the part entry.

Claims, not records, carry confidence. Each line in a part entry shows the evidence class of that specific statement and the sources supporting it (S-numbers link to the Source Register in Appendix B). A part may have an OEM-verified part number (A) and only a tentative breaker compatibility (C).

Class	Meaning	Typical evidence
A	**OEM Verified**	Explicitly documented in a manufacturer catalogue, instruction leaflet, drawing or bulletin (page cited).
B	**Strongly Corroborated**	Multiple independent credible sources agree (e.g. two distributors plus a photo of the label).
C	**Tentative**	Single non-OEM source, or plausible but incomplete evidence. Distributor compatibility claims are never above C on their own.
D	**Unverified**	Lead, hearsay or inference requiring investigation.

Evidence basis codes

Code	Meaning
oem_spec	Manufacturer specification text or table
oem_drawing	Manufacturer drawing
distributor	Distributor catalogue / listing
surplus_listing	Surplus / used-equipment listing
photo	Photograph of an actual part or label
field_measurement	Measured from a physical sample (record instrument and date)
inference	Engineering inference — never sufficient for compatibility


Safety and interchangeability notice

Matching dimensions do not establish electrical interchangeability. Panelboard and switchboard assemblies are listed as systems; substituting non-OEM or cross-manufacturer components may void the listing and short-circuit rating. Nothing in this catalogue states that a reproduced or aftermarket part is approved, listed or electrically equivalent unless an explicit, cited source says so. Distinguish OEM specifications from field measurements and manufacturing assumptions at all times.

2 Hardware Identification Guide

The drawings in this section are generic schematics prepared for this catalogue to illustrate terminology and measurement practice. They are not reproductions of manufacturer drawings and do not depict any specific OEM part.


2.1 Anatomy of a panelboard interior

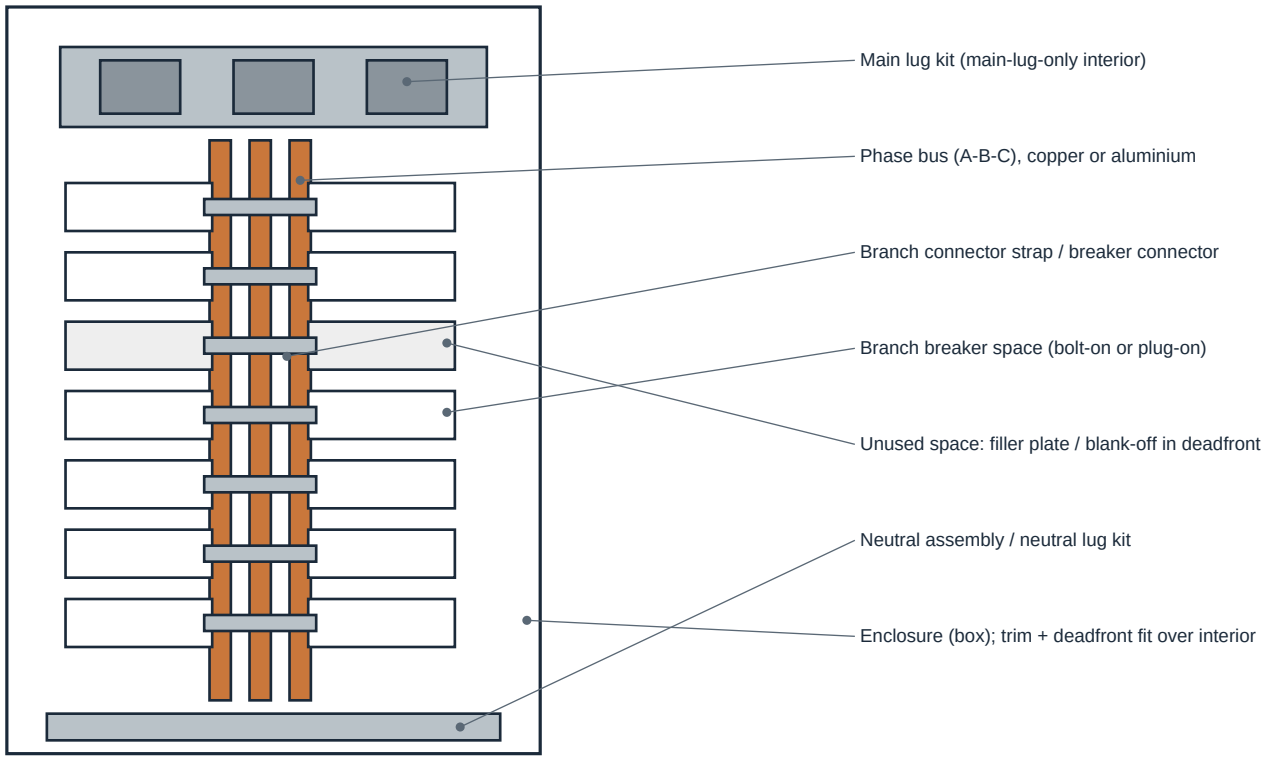

Generic schematic for orientation only — not an OEM drawing, not to scale

Figure 2-1. Generic panelboard interior showing where each component type installs.

2.2 Breaker mounting styles

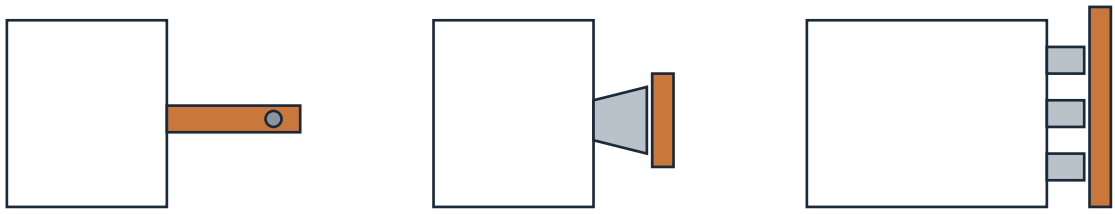

Bolt-on: line terminal screws to bus / connector strap

Plug-on: jaw/clip engages bus stab

Plug-on panel/switchboard unit: jaws onto vertical bus stack

Generic schematics — mounting style is a first-level identification key

Figure 2-2. Bolt-on, plug-on and panel/switchboard plug-on unit mounting.

2.3 Branch connector straps — what to measure

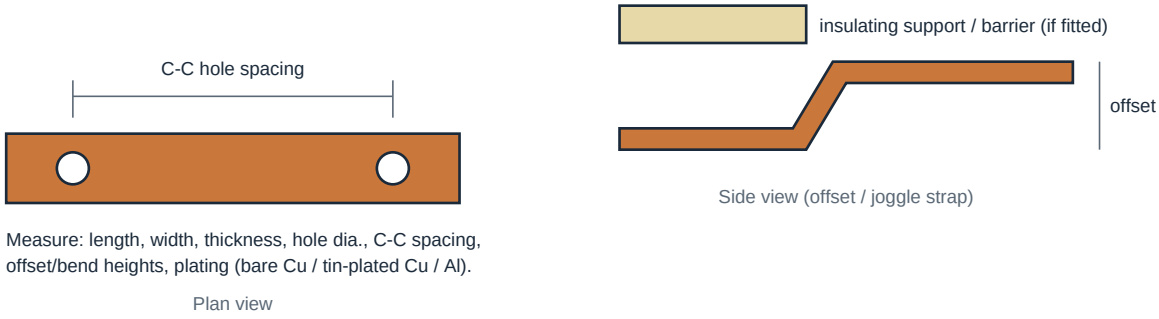


Figure 2-3. Measurement practice for connector straps and bus links.

2.4 Terminal lug types

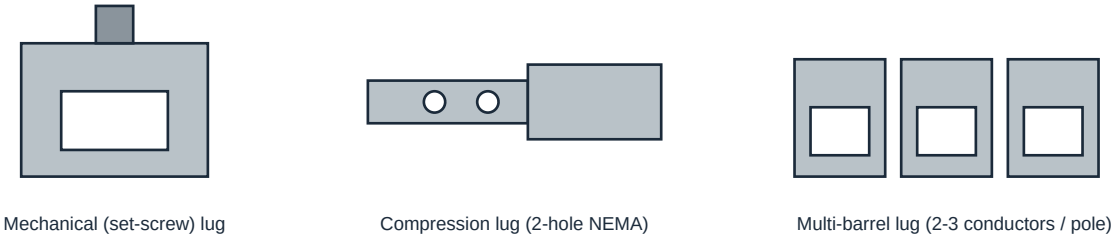


Figure 2-4. Common lug constructions found in main, sub-feed and feed-through lug kits.

2.5 Component-type key

Component type	Function / recognition	Entries
main-breaker-kit	Converts a main-lug interior to main-breaker; includes breaker mounting, connectors to bus.	110
main-lug-kit	Incoming-cable lugs bolted to bus top/bottom; ampere rating set by lug and bus.	133
sub-feed-lug-kit	Second set of lugs to feed a downstream panel from the same bus.	34
through-feed-lug-kit	Lugs at opposite bus end for feeding through to another panel.	2
lug-kit	Lug sets for breakers or assemblies.	63
lug		96
branch-connector-kit	Straps/connectors joining branch breakers to phase bus; series-specific.	265
breaker-mounting-kit	Hardware to mount a breaker frame in a panel/switchboard space.	46
connector-strap	Individual copper/aluminium link between bus and device terminal.	19
neutral-assembly	Neutral bar/lug assembly, incl. 200% neutral options.	49
ground-bar	Equipment grounding bar kit.	23
interior		5
mounting-bracket		10
insulator	Insulating support or standoff for bus or connectors.	2
barrier	Insulating barrier between phases or sections.	41
deadfront	Inner cover exposing only breaker handles.	46
filler-plate	Closes unused breaker space in the deadfront.	129
trim	Front cover/door assembly (surface or flush).	11

Component type	Function / recognition	Entries
box/enclosure		5
hardware-kit		43
fastener		28
conversion-kit	Adapts later breakers or interiors into legacy equipment.	48
spd-kit	Surge-protective-device mounting/connection kit.	6
breaker-accessory		49
handle-lock		3
padlock-attachment		2
other		76

2.6 Identification by physical feature

Parts for which distinguishing physical features are recorded. Use with the dimensions and hole-pattern fields of the entry.

Catalogue ID	OEM PN	Features	Pg
EDH-EAT-00001	KCDPFB100	Kit name retains Westinghouse FB-frame designation; 100 A max (note a) C	21
EDH-EAT-00005	KCDPKB	Kit name retains Westinghouse KB-frame designation (KB/HKB -> JD per cross-reference) C	23
EDH-EAT-00008	KCDPLA600	Kit name retains Westinghouse LA-frame designation C	24
EDH-EAT-00006	KCDPLB	Kit name retains Westinghouse LB-frame designation C	25
EDH-EAT-00010	KCDPMC	Kit name retains Westinghouse MC-frame designation C	26
EDH-EAT-00011	KCDPNC	Note b: connector kits are not rated for 100 percent breakers A	27
EDH-GEA-00102	AMCB4QDFP	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole A	351
EDH-GEA-00108	AMCB6QDFP	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole A	356
EDH-GEA-00009	ASPP6EY12D	Requires minimum 'X2, 12 inches' of unspecified space. Text step 9 also says 'ASPP6TEY12D' (typo in OEM doc). A	313
EDH-GEA-00008	ASPP6EY6D	Crossbar gap 0.06 in A	313
EDH-GEA-00005	ASPP6FB6D	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, SE/TED/TQD 0 in A	314
EDH-GEA-00007	ASPP6QB12D	Requires minimum 'X2, 12 inches' of unspecified space. Crossbar gap 0.06 in. A	314
EDH-GEA-00006	ASPP6QB6D	Crossbar gap 0.06 in; after SG 0.582, SF/TFJ, SE/TED(6P), FB/TQD(6P) 1.875 in A	315
EDH-GEA-00001	ASPP6QD6D	Crossbar gap 0.0525 in; after SG 0.582 in, after SF/TFJ 1.875 in A	315
EDH-GEA-00002	ASPP6SE6D	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, TQD 0 in A	316
EDH-GEA-00003	ASPP6SF3S	Crossbar gap 0.061 in; after SG 0.582 in. Filler plate is flipped for right-side mounting. A	316
EDH-GEA-00004	ASPP6SG3S	Crossbar gap 0.002 in A	317
EDH-GEA-00182	AMC2GMFP	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices) A	361
EDH-GEA-00163	AMC3GMFP	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices) A	365
EDH-GEA-00244	AMCB6TEDL	Push-on filler snaps over flexible prongs on filler supports; barrier center riveted to filler A	388
EDH-GEA-00303	TC041	Not UL listed (per table footnote) B	412
EDH-SIE-00231	SEBKP1P2P3V1	Drawing ref 11-A-1157-01 / 11-D-2740-01 A	522
EDH-SIE-00232	SEBKP2V1	Drawing ref 11-D-2733-01 A	455
EDH-SIE-00233	SEBKP2V2	Drawing ref 11-D-2734-01 A	455
EDH-SIE-00234	SEBKP2V3	Drawing ref 11-D-2735-01 A	455
EDH-SIE-00235	SEBKP2V4	Drawing ref 11-D-2736-01 A	456
EDH-SIE-00236	SEBKP2V5	Drawing ref 11-D-2738-01 A	456
EDH-SIE-00237	SEBKP2V6	Drawing ref 11-D-2739-01 A	456
EDH-SIE-00238	SEBKP2V7	Drawing ref 11-D-2898-01 A	457
EDH-SIE-00239	SEBKP3V1	Drawing ref (p.11-67) A	464
EDH-SIE-00224	SEBKRP1V1	Drawing ref 11-A-1148-01 A	522
EDH-SIE-00225	SEBKRP1V2	Drawing ref 11-A-1148-01 A	523
EDH-SIE-00226	SEBKRP1V3	Drawing ref 11-A-1149-01 A	523
EDH-SIE-00227	SEBKRP1V4	Drawing ref 11-A-1149-01 A	523

Catalogue ID	OEM PN	Features	Pg
EDH-SIE-00228	SEBKRP1V5	Drawing ref 11-A-1165-01 **A**	524
EDH-SIE-00229	SEBKRP1V6	Drawing ref 11-A-1194-01 **A**	524
EDH-SIE-00230	SEBKRP1V7	Drawing ref 11-B-1060-01 **A**	524
EDH-SIE-00155	6CLE2	2005 list price $845.00 **A**	482
EDH-SIE-00191	6CLF1	2005 list price $1553.00 **A**	537
EDH-SIE-00194	6CLJ1	2005 list price $2122.00 **A**	538
EDH-SIE-00198	6CLL1	2005 list price $2525.00 **A**	539
EDH-SIE-00188	6E62	2005 list price $845.00 **A**	540
EDH-SIE-00190	6F62	2005 list price $1529.00 **A**	540
EDH-SIE-00192	6JJ61	2005 list price $2122.00 **A**	541
EDH-SIE-00193	6JJ62	2005 list price $2349.00 **A**	541
EDH-SIE-00197	6LL61	2005 list price $2525.00 **A**	542
EDH-SIE-00189	6QJ2	2005 list price $1529.00 **A**	544
EDH-SIE-00196	6SCJ1	2005 list price $2122.00 **A**	544
EDH-SIE-00200	6SCL1	2005 list price $2525.00 **A**	545
EDH-SIE-00195	6SJL1	2005 list price $2122.00 **A**	546
EDH-SIE-00199	6SLL1	2005 list price $2525.00 **A**	546
EDH-SIE-00102	BBKB32	Drawing ref 11-D-2267-01 **A**	450
EDH-SIE-00108	BBKQR1	Drawing ref 11-D-2636-01 **A**	452
EDH-SIE-00103	BBKVA4P2P3	Drawing ref 13-D-2011-13 **A**	453
EDH-SIE-00112	BBKVA5262P2S	Drawing ref 11-D-2894-01 **A**	453
EDH-SIE-00175	MG1D	2005 list price $2938.00 **A**	484
EDH-SIE-00179	NG1D	2005 list price $3489.00 **A**	484
EDH-SIE-00150	SBLBD	2005 list price $768.00 **A**	488
EDH-SIE-00176	SLM1D	2005 list price $2938.00 **A**	495
EDH-SIE-00177	SMND	2005 list price $3489.00 **A**	496
EDH-SIE-00178	SSMND	2005 list price $3489.00 **A**	497
EDH-SIE-00088	P1CONACPHCU	Drawing ref 11-D-2572-02 **A**	513
EDH-SIE-00089	P1CONBPHAL	Drawing ref 11-D-2573-01 **A**	514
EDH-SIE-00090	P1CONBPHCU	Drawing ref 11-D-2573-02 **A**	514
EDH-SIE-00080	BBKQRP1FK	Eng./drawing ref 11-D-2644-01 (contains 11-D-3282-01, 11-D-4563-01, 11-D-4564-01) **A**	461
EDH-SIE-00081	BBKQRP2FK	Eng./drawing ref 11-D-4565-01, 11-D-3283-01, 11-D-3284-01, 11-D-3288-01, 12-6812-34 **A**	466
EDH-SIE-00086	DFK07	Eng./drawing ref 11-D-3018-67 **A**	457
EDH-SIE-00087	DFK08	Eng./drawing ref 11-D-3018-68 **A**	457
EDH-SIE-00085	DFK1	Eng./drawing ref 11-D-2273-01 (strips 11-D-3018-01 thru -07) **A**	458
EDH-SIE-00091	P1SCRWS	Drawing ref 11-A-2010-01 **A**	531
EDH-SIE-00211	6FPB01	Series 6 blank plate; 2005 list price $154.00 **A**	478
EDH-SIE-00212	6FPB02	Series 6 blank plate; 2005 list price $175.00 **A**	479
EDH-SIE-00213	6FPB03	Series 6 blank plate; 2005 list price $175.00 **A**	479
EDH-SIE-00214	6FPB05	Series 6 blank plate; 2005 list price $175.00 **A**	479
EDH-SIE-00215	6FPB10	Series 6 blank plate; 2005 list price $239.00 **A**	480
EDH-SIE-00064	DFFP01B	Eng./drawing ref 11-D-4612-01 **A**	525
EDH-SIE-00065	DFFP01C	Eng./drawing ref 11-D-4600-01 **A**	525
EDH-SIE-00062	DFFP1A	Eng. ref 11-D-4613-01; snap-in with small spring side tabs **A**	526
EDH-SIE-00076	DFFP3	Eng./drawing ref 11-D-2269-01 **A**	458
EDH-SIE-00077	DFFP6	Eng./drawing ref 11-D-2270-01 **A**	458
EDH-SIE-00069	DFFPED01	Eng./drawing ref 12-A-1802-61 **A**	449
EDH-SIE-00070	DFFPFD01	Eng./drawing ref 12-A-1803-61 **A**	526
EDH-SIE-00071	DFFPJD01	Eng./drawing ref 11-D-4522-61 **A**	527
EDH-SIE-00072	DFFPJD02	Eng./drawing ref 11-D-4598-01 **A**	527
EDH-SIE-00073	DFFPQJ01	Eng./drawing ref 12-A-1804-61 **A**	527
EDH-SIE-00074	DFFPQJ02	Eng./drawing ref 12-A-1804-62 **A**	528

Catalogue ID	OEM PN	Features	Pg
EDH-SIE-00066	DFFPVA41A	Eng./drawing ref 11-D-4604-01 **A**	528
EDH-SIE-00067	DFFPVA5262A	Eng./drawing ref 11-D-4617-01 **A**	528
EDH-SIE-00078	DFFPVA5262P2A	Eng./drawing ref 11-D-4610-01 **A**	459
EDH-SIE-00079	DFFPVA5262P2B	Eng./drawing ref 11-D-3340-01 / 11-D-4614-01 **A**	459
EDH-SIE-00068	DFFPVA5363A	Eng./drawing ref 11-D-4599-01 (p.11-23) / 11-D-4617-01 (p.11-20) **A**	529
EDH-SIE-00084	DFP3AP01	Eng./drawing ref 11-D-3033-61 (11-D-3033-01) **A**	459
EDH-SIE-00083	EBF1	Eng./drawing ref 11-D-4529-01 **A**	464
EDH-SIE-00075	MBKQRFK	Eng./drawing ref 11-D-2643-01 (p.11-20) / 11-D-4563-01 (p.11-23) **A**	529
EDH-SIE-00082	P2QRFP01	Eng./drawing ref 11-D-4564-01 **A**	459
EDH-SIE-00113	BBKVA5262P2HW	Drawing ref 11-D-2895-61 **A**	460
EDH-SIE-00096	BK1A	Drawing ref 11-A-2024-01 **A**	530
EDH-SIE-00095	IMK1	Drawing ref 11-A-2024-01 **A**	530
EDH-SIE-00120	P2BK1	Drawing ref 11-D-2068-01 **A**	460
EDH-SIE-00121	P2BK2	Drawing ref 11-D-2068-02 **A**	460
EDH-SIE-00122	P2BK3	Drawing ref 11-D-2068-03 **A**	461
EDH-SIE-00123	P3BK1	Drawing ref (p.11-67) **A**	465
EDH-SIE-00117	BNK350N	Drawing ref 11-A-1869-61 **A**	449
EDH-SIE-00029	4MLKA1	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil **A**	446
EDH-SIE-00019	4MLKA1A	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil **A**	508
EDH-SIE-00023	4MLKA1B	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU] **A**	508
EDH-SIE-00030	4MLKA3	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil **A**	446
EDH-SIE-00020	4MLKA3A	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil **A**	509
EDH-SIE-00024	4MLKA3B	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU] **A**	509
EDH-SIE-00031	4MLKC1	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil **A**	446
EDH-SIE-00021	4MLKC1A	Wire range (1) 1/0-600 kcmil, CU cable only **A**	510
EDH-SIE-00032	4MLKC3	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil **A**	447
EDH-SIE-00022	4MLKC3A	Wire range (1) 1/0-600 kcmil, CU cable only **A**	510
EDH-SIE-00025	MLKA1	Wire range (1) #6 AWG-350 kcmil (CU or AL) **A**	447
EDH-SIE-00015	MLKA1A	Wire range (1) #6 AWG-350 kcmil (CU or AL) **A**	511
EDH-SIE-00026	MLKA3	Wire range (1) #6 AWG-350 kcmil (CU or AL) **A**	447
EDH-SIE-00016	MLKA3A	Wire range (1) #6 AWG-350 kcmil (CU or AL) **A**	511
EDH-SIE-00027	MLKC1	Wire range (1) #6 AWG-350 kcmil (CU) **A**	448
EDH-SIE-00017	MLKC1A	Wire range (1) #6 AWG-350 kcmil (CU) **A**	512
EDH-SIE-00028	MLKC3	Wire range (1) #6 AWG-350 kcmil (CU) **A**	448
EDH-SIE-00018	MLKC3A	Wire range (1) #6 AWG-350 kcmil (CU) **A**	512
EDH-SIE-00092	P1DFS250AFT	Drawing ref 11-D-3323 **A**	521
EDH-SIE-00093	P1DFS250ANFT	Drawing ref 11-D-3323 **A**	521
EDH-SIE-00094	P1DFS400A	Drawing ref 11-D-3315 **A**	522
EDH-SIE-00116	BNK2	Drawing ref 11-A-1862 **A**	454
EDH-SIE-00119	BNKP2EX1	Drawing ref 11-1850-01 / 11-C-2011-01 **A**	454
EDH-SIE-00118	LPP2NB01	Drawing ref 15-A-1800-61 **A**	454
EDH-SQD-00143	HLW4BL	Surface-mount plate approx. 6.35 in. W x 4.5 in. H **C**	232
EDH-SQD-00176	CF16RJ63C36	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> **D**	290
EDH-SQD-00172	CF20R63C	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> **D**	291
EDH-SQD-00174	CF20RJ63C	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> **D**	291
EDH-SQD-00173	CF25R63C	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> **D**	291
EDH-SQD-00175	CF30RJ63C	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> **D**	291
EDH-SQD-00002	QMB221HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	257

Catalogue ID	OEM PN	Features	Pg
EDH-SQD-00001	QMB221TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	258
EDH-SQD-00004	QMB222HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	258
EDH-SQD-00003	QMB222TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	259
EDH-SQD-00006	QMB223HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	259
EDH-SQD-00005	QMB223TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	260
EDH-SQD-00007	QMB224W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	260
EDH-SQD-00008	QMB225W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	261
EDH-SQD-00009	QMB225WT3	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	261
EDH-SQD-00023	QMB261HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	262
EDH-SQD-00022	QMB261TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	262
EDH-SQD-00025	QMB262HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	263
EDH-SQD-00024	QMB262TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	263
EDH-SQD-00027	QMB263HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	264
EDH-SQD-00026	QMB263TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	264
EDH-SQD-00028	QMB264W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	265
EDH-SQD-00011	QMB321HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	265
EDH-SQD-00010	QMB321TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	266
EDH-SQD-00013	QMB322HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	266
EDH-SQD-00012	QMB322TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	266
EDH-SQD-00015	QMB323HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	267
EDH-SQD-00014	QMB323TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	267
EDH-SQD-00016	QMB324W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	268
EDH-SQD-00017	QMB325W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	269
EDH-SQD-00018	QMB325WT3	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	269
EDH-SQD-00019	QMB326W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	270
EDH-SQD-00020	QMB326WT3	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	270
EDH-SQD-00021	QMB327WT3	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	271
EDH-SQD-00030	QMB361HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	271
EDH-SQD-00029	QMB361TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	272
EDH-SQD-00032	QMB362HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	272

Catalogue ID	OEM PN	Features	Pg
EDH-SQD-00033	QMB362T21W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	273
EDH-SQD-00031	QMB362TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	273
EDH-SQD-00035	QMB363HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	274
EDH-SQD-00036	QMB363T31W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	274
EDH-SQD-00037	QMB363T32W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	275
EDH-SQD-00034	QMB363TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	275
EDH-SQD-00038	QMB364W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	276
EDH-SQD-00039	QMB365W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	276
EDH-SQD-00040	QMB365WT6	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	277
EDH-SQD-00041	QMB366W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	277
EDH-SQD-00042	QMB367W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	278

3 Eaton lineage

Lineage / brand markings: Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant

Family	Type	Status	Era	Entries	Pg
BR Type BR loadcenter	loadcenter	current (Eaton Type BR)	Made by Westinghouse's Bryant subsidiary, Bridgeport CT, until 1989 (Westinghouse and Bryant nameplates); Westinghouse bought Challenger Electric 1988, redesigned the product and moved production to Jackson MS; from 1995 Eaton moved all loadcenter production to Lincoln IL	13	15
CDP Westinghouse CDP / HCDP panelboard	panelboard	discontinued; replacement panelboard type PRL4B; parts and kits from Sumter Aftermarket Center	Westinghouse power panelboard; with FDP, encompassed most Westinghouse MCCBs for more than 34 years (to 1988 redesign); Cutler-Hammer also built CDP under supply agreement	42	19
FDP Westinghouse FDP fusible panelboard	panelboard	discontinued; replacement panelboard type PRL4F	Vintage Westinghouse	29	44
NAB Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	panelboard	discontinued; connectors not available; replacement panelboard PRL3a (NAB, NA1B, NDP, NEB, NHDP, NHEB, ABH) or PRL2a (NH1B); panelboard-only replacement breaker REH/RHFA	—	0	50
NLAB Westinghouse NLAB lighting panelboard	panelboard	discontinued; connectors not available; replace panelboard with PRL1a (NLAB, NPLAB, NQB, NQP, NQC), PRL1aLX (NLAB-LX), PRL3a (NLAB-AB/ABH)	Westinghouse panelboards manufactured between 1937 and 1988	1	50
PRC Pow-R-Command lighting control panelboard	panelboard	Current (Pow-R-Command E series in 2020 catalog)	Introduced March 1996	22	51
PRL-LX Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	panelboard	Legacy (a) / current (X)	PRL1a/2a-LX introduced December 1997	0	51
PRL1/PRL2 Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	panelboard	discontinued; replaced by PRL1a / PRL2a	Westinghouse panelboards manufactured after 1988 (1988 redesign for Series C)	27	51
PRL1A Pow-R-Line 1a	panelboard	Legacy; renewal parts still listed April 2021. Superseded by PRL1X (Pow-R-Line Xpert, introduced 2020; time line shows PRL1X/2X/3X/4X from May 2020)	Introduced October 1996 (Cutler-Hammer); part of 'Pow-R-Line C' line introduced 1993	183	57
PRL1X Pow-R-Line Xpert 1X	panelboard	Current	Introduced 2020 (time line: May 2020)	165	130
PRL2A Pow-R-Line 2a	panelboard	Legacy; renewal parts listed April 2021; superseded by PRL2X	Introduced October 1996	179	143
PRL2X Pow-R-Line Xpert 2X	panelboard	Current	Introduced 2020	164	144
PRL3 Westinghouse Pow-R-Line 3 panelboard (vintage)	panelboard	discontinued; replaced by PRL3a	Pre-1994 Westinghouse	15	144

Family	Type	Status	Era	Entries	Pg
PRL3A Pow-R-Line 3a	panelboard	Legacy; renewal parts listed April 2021; superseded by PRL3X. Deadfront/filler hardware changed for panels built after April 2019 (distributor wording)	Introduced March 1994	74	146
PRL3E Pow-R-Line 3E	panelboard	Current in June 2020 catalog	Shown in January 2018 and June 2020 catalogs	0	168
PRL3X Pow-R-Line Xpert 3X	panelboard	Current	Introduced 2020	48	168
PRL4 Pow-R-Line 4 panelboard (PRL4B / PRL4F)	panelboard	current (PRL4X / Pow-R-Line Xpert naming in 2022 RP01400001E)	PRL4B/F introduced October 1987 (originally a Westinghouse product)	54	178
PRL4X Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	panelboard	Current	Introduced 2020	41	209
PRL5P Pow-R-Line 5P plug-on distribution panelboard	panelboard	Discontinued (dropped from 2021 renewal parts; in 2009 and 2017 editions)	Introduced August 1995	29	210
WEB Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	panelboard	discontinued; replacement panelboard type PRL3a (WGB/WGHB -> PRL2a)	—	3	218
ES Cutler-Hammer Type ES switchboard	switchboard	discontinued (Vol 12 lists as legacy; new PRLC can connect via transition section)	Introduced 1991 by Cutler-Hammer as replacement for their version of WF/WRP; Mullenbach (1962) heritage; used exclusively Westinghouse MCCBs	0	218
IFS Integrated Facility System switchboard	switchboard	current (2018 consulting guide)	—	0	218
PRLC Pow-R-Line C switchboard	switchboard	current (listed in April 2018 consulting guide)	Introduced late 1980s (1988) by Westinghouse as successor to WF/WRP; built in Sumter SC and Visalia CA; current Eaton product	0	218
PRLCS Pow-R-Line CS switchboard	switchboard	current (Canadian market; manual IB015002EN effective Nov 2021)	—	0	219
PRLi Pow-R-Line i switchboard	switchboard	current (2018 consulting guide)	Evolved in 1991 from Asheville 'Pow-R-I' (itself from WRI); built in Sumter SC	0	220
WF/WRP Westinghouse WF/WRP switchboard	switchboard	discontinued (superseded by Pow-R-Line C)	Introduced 1955 by Westinghouse, St. Louis MO; design transferred 1988 to Sumter SC and Visalia CA as Pow-R-Line C	7	220

3.1 BR — Type BR loadcenter

FAM-EAT-015 · loadcenter · aka BR, Type BR, Bryant BR, Challenger BR · markings: Westinghouse, Bryant, Challenger, Cutler-Hammer, Eaton

1-in-per-pole plug-on residential/light-commercial loadcenter family with Westinghouse/Bryant/Challenger lineage. Vol 12 Tab 5 lists replacement main/subfeed lug blocks, filler plates, interlocks and handle accessories.

Attribute	Value	Cl.	Sources
Status	current (Eaton Type BR)	A	S46 p. V12-T5-2; oem_spec
Era of manufacture	Made by Westinghouse's Bryant subsidiary, Bridgeport CT, until 1989 (Westinghouse and Bryant nameplates); Westinghouse bought Challenger Electric 1988, redesigned the product and moved production to Jackson MS; from 1995 Eaton moved all loadcenter production to Lincoln IL	A	same as above

Breaker families associated: BR
Key documents: S46 CA08100014E Tab 5 Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00120	**BRL200**	Type BR loadcenter main lugs (BRL200)	—	listed October 2016

EDH-EAT-00120	BRL200	Eaton	main-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main lugs (BRL200)

OEM part number	BRL200	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Main lugs, two-pole 200 A stud mounted (includes deadfront filler plate), #1-300 kcmil	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00119	**3BRS225**	Type BR loadcenter main and subfeed lug block (3BRS225)	—	listed October 2016
EDH-EAT-00118	**3BRSF150**	Type BR loadcenter main and subfeed lug block (3BRSF150)	—	listed October 2016
EDH-EAT-00117	**BRS225**	Type BR loadcenter main and subfeed lug block (BRS225)	—	listed October 2016
EDH-EAT-00115	**BRSF125**	Type BR loadcenter main and subfeed lug block (BRSF125)	—	listed October 2016
EDH-EAT-00116	**BRSF150**	Type BR loadcenter main and subfeed lug block (BRSF150)	—	listed October 2016

EDH-EAT-00119	3BRS225	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (3BRS225)

OEM part number	3BRS225	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 3-pole 225 A, 6 spaces, #2-300 kcmil	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00118	3BRSF150	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (3BRSF150)

OEM part number	3BRSF150	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 3-pole 150 A, 3 spaces, #8-2/0 (75 C only)	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00117	BRS225	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRS225)

OEM part number	BRS225	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 2-pole 225 A, 4 spaces, #2-300 kcmil	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00115	BRSF125	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRSF125)

OEM part number	BRSF125	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 2-pole 125 A, 2 spaces, #8-2/0 (75 C only)	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00116	BRSF150	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRSF150)

OEM part number	BRSF150	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 2-pole 150 A, 2 spaces, #8-2/0 (75 C only)	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00124	**NL300**	Type BR loadcenter add-on neutral/ground lug (NL300)	—	listed October 2016

EDH-EAT-00124	NL300	Eaton	lug	LISTED OCTOBER 2016

Type BR loadcenter add-on neutral/ground lug (NL300)

OEM part number	NL300	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Add-on neutral/ground lug, 300 kcmil maximum	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00123	**BINA**	Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)	—	listed October 2016

EDH-EAT-00123	BINA	Eaton	neutral-assembly	LISTED OCTOBER 2016

Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)

OEM part number	BINA	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Isolated neutral assembly (computer circuits)	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00121	**BRFP**	Type BR loadcenter filler plate (BRFP)	—	listed October 2016
EDH-EAT-00122	**BWFP**	Type BR loadcenter filler plate for bw main circuit breaker space (with hardware) (BWFP)	—	listed October 2016

EDH-EAT-00121	BRFP	Eaton	filler-plate	LISTED OCTOBER 2016

Type BR loadcenter filler plate (BRFP)

OEM part number	BRFP	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Filler plate, 1.00 in circuit breaker space; ordering quantity 25	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00122	BWFP	Eaton	filler-plate	LISTED OCTOBER 2016

Type BR loadcenter filler plate for bw main circuit breaker space (with hardware) (BWFP)

OEM part number	BWFP	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Filler plate for BW main circuit breaker space (with hardware)	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00125	**BHT**	Type BR loadcenter handle tie bar joining two adjacent single-pole type br breakers (metal cylinder pin type); qty 10 (BHT)	—	listed October 2016

EDH-EAT-00125	BHT	Eaton	handle-lock	LISTED OCTOBER 2016

Type BR loadcenter handle tie bar joining two adjacent single-pole type br breakers (metal cylinder pin type); qty 10 (BHT)

OEM part number	BHT	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Handle tie bar joining two adjacent single-pole Type BR breakers (metal cylinder pin type); qty 10	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00126	**BRLW**	Type BR loadcenter padlockable handle lockoff for 1- (BRLW)	—	listed October 2016
EDH-EAT-00127	**BRLW1**	Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mounted (BRLW1)	—	listed October 2016

EDH-EAT-00126	BRLW	Eaton	padlock-attachment	LISTED OCTOBER 2016

Type BR loadcenter padlockable handle lockoff for 1- (BRLW)

OEM part number	BRLW	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Padlockable handle lockoff for 1-, 2- or 3-pole Type BR (escutcheon mounted); qty 10	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00127	BRLW1	Eaton	padlock-attachment	LISTED OCTOBER 2016

Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mounted (BRLW1)

OEM part number	BRLW1	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Padlockable handle lockoff for single-pole Type BR (handle mounted, set screw); qty 10	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

3.2 CDP — Westinghouse CDP / HCDP panelboard

FAM-EAT-007 · panelboard · aka CDP, CDP/HCDP, CPD, HCDP, Westinghouse CDP · markings: Cutler-Hammer, Westinghouse

Westinghouse distribution (circuit-breaker) panelboard on a chassis with vertical phase busbars at 3.50 in centers and mounting rails 19.50 in apart; X unit = 1.38 in. Boxes 30, 38, 42, 48 and 50 in wide; neutral in side gutter. Branch breakers mount on breaker mounting brackets with copper connectors to the chassis bus; unused space closed by filler covers (KCDP_X). Sumter supplies KCDP connector kits (connectors+brackets+covers+hardware), KCDP retrofit kits (breaker + connector kit) and -H hardware-only kits. Older 'LB' style connectors accept Series C K-frame with TAD3 adapter.

Westinghouse distribution panelboard in 30-50 in wide boxes with chassis rails and vertical chassis bus, 3.50 in phase-to-phase bus centre-lines (switch kits). Series C retrofit kits (KCDP+breaker catalog no.) use same X space as original breakers; KD onto LB connectors requires TAD3 adapter.

Attribute	Value	Cl.	Sources
Status	discontinued; replacement panelboard type PRL4B; parts and kits from Sumter Aftermarket Center	A	S38 pp. V12-T4-4, V12-T4-7, V12-T4-9; oem_spec
	Obsolete; retrofit and connector kits available from Sumter Plant Aftermarket	A	S55 oem_spec
Era of manufacture	Westinghouse power panelboard; with FDP, encompassed most Westinghouse MCCBs for more than 34 years (to 1988 redesign); Cutler-Hammer also built CDP under supply agreement	A	S38 pp. V12-T4-2, V12-T4-3; oem_spec
	Vintage Westinghouse (pre-Pow-R-Line 4)	C	S55 inference
Successor	PRL4B (Pow-R-Line 4B)	A	S38 p. V12-T4-7; oem_spec
	PRL4B (functional)	D	S55 inference
Main ampacity	1600 A maximum	A	S38 p. V12-T4-9; oem_spec
Branch breakers accepted	Westinghouse E, EA, EH, F, FA (pre-1974), EB, EHB, FB, HFB, CA, JA/KA/HKA, JB/KB/HKB, DA, LA/HLA/LAB, LB/LBB/HLB, LC/HLC, MA/HMA, MC/HMC, NB/HNB, NC/HNC, Tri-Pac FB-P/LA-P/NB-P, LCL; Series C upgrades EHD, FDB, FD, HFD, FDC, ED, JD, DK, KD, LD, MDL, ND	A	S38, S39 p. V12-T4-7; RP01400002E pp. 12-14; oem_spec
	Original EB/EHB/FB/HFB/KA/KB/JA/JB/DA/LA/LB/LC/MA/MC/NB/NC frames; retrofit with Series C EHD..ND via KCDP kits	A	S55 pp.12-14; oem_spec
x_unit	One X = 1.38 in (35.1 mm) of panel height; blank fillers required for unused X space	A	S38 p. V12-T4-9; oem_spec
bus_geometry	Vertical busbars 1.38 in typ, phase centers 3.50 in, mounting rails 19.50 in (applies to CDP and FDP chassis)	A	S39, S38 RP01400002E p. 17 Fig. 2; V12-T4-10; oem_spec
box_widths	CDP and FDP standard widths 30.00, 38.00, 42.00, 48.00 and 50.00 in; neutral located in side gutter	A	S39 p. 2; oem_spec
layout	Main lug top gutter 7-1/2 in; main lug section 5X 225 A, 7X 250-400 A, 9X 600 A, 12X/13X 800-1600 A; thru-feed lugs 10X 225 A, 13X 250-400 A, 17X 600-800 A; 30 in box branch: 1P EB/EHB/HFB 1X, 2P EB/EHB/FB 2X, 3P 3X, CA/CAH 2X-3X, JB/KB/HKB 3X (5 in), DA/LB/LBB/HLB 4X, LA/LC/HLC 6X, MC/HMC/NC/HNC/LCL 6X (48 in box)	A	S38 p. V12-T4-9; oem_spec
breaker_mix_rule	Only breakers of the same frame size can be installed across from each other (same horizontal plane); KD breakers can be mounted across from LB breakers if a TAD3 line side adapter is used	A	S38 p. V12-T4-7 notes 4,6; oem_spec

Attribute	Value	Cl.	Sources
single_pole_note	When only one EB, EHB or HFB single-pole breaker is required with other frame size breakers, the space required changes from 1X to 2X	A	S38 p. V12-T4-9 note 1; oem_spec
renewal_doc	Renewal parts data RP01400002E; pricing PL01400002E	A	S38 pp. V12-T4-9, V12-T4-23; oem_spec
subchassis_note	If the CDP panelboard has a subchassis lighting panel, contact Sumter Plant Aftermarket Center (803-481-6677) for breaker selection	A	S39 p. 11; oem_spec
bus_spacing	Vertical bus 3.50 in (88.9 mm) phase-to-phase; mounting rails 19.50 in; if 4.25 in spacing, switches will not fit	A	S55 p.17 Figure 2; oem_spec

Breaker families associated: CA, Current-limiting FCL / LCL (and FDB+LFB), DA, E, EB, ED, EHB, EHD, F, FB, FD, HFB, JA, JB, JD, KA, KB, KD, LA, LB, LC, LD, MA, MC, MDL, NB, NC, ND, Tri-Pac
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S39 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD; S40 RP01400002E (2009) Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition); S55 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P
Also fits this family (entry printed elsewhere): KFDP4XT, KFDP5XT, KFDPB6X-2, KFDPW9X-4, KFDPW11X-6, KFDPW11X-8, KFDPW15X-12, K80429

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00004	**KCDPCA**	CDP breaker connector kit, twin-mount, for CA, CAH, HCA	CA, CAH, HCA A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00002	**KCDPED225**	CDP breaker connector kit, twin-mount, for FD, FDB, HFD, FDC, ED, EDH, EDC	FD, FDB, HFD, FDC, ED, EDH, EDC A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00001	**KCDPFB100**	CDP breaker connector kit, twin-mount, for EHD, FDB, FD, HFD, FDC (100 A maximum)	EHD, FDB, FD, HFD, FDC (100 A maximum) A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00003	**KCDPFBP**	CDP breaker connector kit, twin-mount, for FB-P, FCL	FB-P, FCL A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00005	**KCDPKB**	CDP breaker connector kit, twin-mount, for JD, JDB, HJD, JDC	JD, JDB, HJD, JDC A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00007	**KCDPLA400**	CDP breaker connector kit, twin-mount, for LA-P	LA-P A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00008	**KCDPLA600**	CDP breaker connector kit, twin-mount, for LD, HLD, LDC	LD, HLD, LDC A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00006	**KCDPLB**	CDP breaker connector kit, twin-mount, for DK, KD, KDB, HKD, KDC	DK, KD, KDB, HKD, KDC A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00009	**KCDPLCL**	CDP breaker connector kit, single-mount, for LCL	LCL A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00010	**KCDPMC**	CDP breaker connector kit, single-mount, for MDL, HMDL	MDL, HMDL A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00012	**KCDPNBP**	CDP breaker connector kit, single-mount, for NB-P	NB-P A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00011	**KCDPNC**	CDP breaker connector kit, single-mount, for ND, HND	ND, HND A	Listed Feb 2013 (Sumter Plant Aftermarket Center)

EDH-EAT-00004	KCDPCA	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013 (SUMTE

CDP breaker connector kit, twin-mount, for CA, CAH, HCA

OEM part number	KCDPCA	A	S39, S40, S55 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
	CDP panelboard breaker connector kit for CA, CAH, HCA 3-pole	A	S55 p.14; oem_spec
Application	branch	A	S39 p. 14; oem_spec
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
	Mounting: Twin; CDP chassis	A	S55 oem_spec
Breaker compatibility	CA, CAH, HCA	A	S39 p. 14 Table 19; oem_spec
	CA, CAH, HCA 3-pole	A	S55 p.14 Table 19; oem_spec
Poles	3	A	S39 p. 14 Table 19; oem_spec
Current rating	225 A frame	A	S39 pp. 12-14; oem_spec

Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S55 p.14; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
	3X space (1X = 1.38 in)	A	S55 oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	same as above
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: EB, CA		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00002	**KCDPED225**	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013 (SUMTE

CDP breaker connector kit, twin-mount, for FD, FDB, HFD, FDC, ED, EDH, EDC

OEM part number	KCDPED225	A	S39, S40, S55 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
	CDP panelboard breaker connector kit for FD, FDB, HFD, FDC, ED, EDH, EDC 3-pole	A	S55 p.14; oem_spec
Application	branch	A	S39 p. 14; oem_spec
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
	Mounting: Twin; CDP chassis	A	S55 oem_spec
Breaker compatibility	FD, FDB, HFD, FDC, ED, EDH, EDC	A	S39 p. 14 Table 19; oem_spec
	FD, FDB, HFD, FDC, ED, EDH, EDC 3-pole	A	S55 p.14 Table 19; oem_spec
Poles	3	A	S39 p. 14 Table 19; oem_spec
Current rating	225 A frame	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S55 p.14; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
	3X space (1X = 1.38 in)	A	S55 oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	same as above
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: EB, EHD, FD, ED		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00001	**KCDPFB100**	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013 (SUMTE

CDP breaker connector kit, twin-mount, for EHD, FDB, FD, HFD, FDC (100 A maximum)

OEM part number	KCDPFB100	A	S39, S40, S55 RP01400002E p. 14 Table 19; oem_spec

Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
	CDP panelboard breaker connector kit for EHD, FDB, FD, HFD, FDC 3-pole (100 A max)	A	S55 p.14; oem_spec
Application	branch	A	S39 p. 14; oem_spec
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
	Mounting: Twin; CDP chassis	A	S55 oem_spec
Breaker compatibility	EHD, FDB, FD, HFD, FDC (100 A maximum)	A	S39 p. 14 Table 19; oem_spec
	EHD, FDB, FD, HFD, FDC 3-pole (100 A max)	A	S55 p.14 Table 19; oem_spec
Poles	3	A	S39 p. 14 Table 19; oem_spec
Current rating	100 A maximum	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S55 p.14; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
	3X space (1X = 1.38 in)	A	S55 oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	same as above
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse FB-frame designation; 100 A max (note a)	C	S39 p. 14; inference
Cross-links	Families: CDP · Breakers: EB, EHB, FB, HFB, EHD, FD		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00003	KCDPFBP	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013 (SUMTE

CDP breaker connector kit, twin-mount, for FB-P, FCL

OEM part number	KCDPFBP	A	S39, S40, S55 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
	CDP panelboard breaker connector kit for FB-P, FCL 3-pole	A	S55 p.14; oem_spec
Application	branch	A	S39 p. 14; oem_spec
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
	Mounting: Twin; CDP chassis	A	S55 oem_spec
Breaker compatibility	FB-P, FCL	A	S39 p. 14 Table 19; oem_spec
	FB-P, FCL 3-pole	A	S55 p.14 Table 19; oem_spec
Poles	3	A	S39 p. 14 Table 19; oem_spec
Current rating	100 A (FB-P 15-100 A)	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S55 p.14; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec

	3X space (1X = 1.38 in)	A	S55 oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	same as above
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: EB, Tri-Pac, Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00005	KCDPKB	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013 (SUMTE

CDP breaker connector kit, twin-mount, for JD, JDB, HJD, JDC

OEM part number	KCDPKB	A	S39, S40, S55 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
	CDP panelboard breaker connector kit for JD, JDB, HJD, JDC 3-pole	A	S55 p.14; oem_spec
Application	branch	A	S39 p. 14; oem_spec
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
	Mounting: Twin; CDP chassis	A	S55 oem_spec
Breaker compatibility	JD, JDB, HJD, JDC	A	S39 p. 14 Table 19; oem_spec
	JD, JDB, HJD, JDC 3-pole	A	S55 p.14 Table 19; oem_spec
Poles	3	A	S39 p. 14 Table 19; oem_spec
Current rating	250 A frame	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S55 p.14; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
	3X space (1X = 1.38 in)	A	S55 oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	same as above
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse KB-frame designation (KB/HKB -> JD per cross-reference)	C	S39 p. 14; inference
Cross-links	Families: CDP · Breakers: EB, KB, JB, JD		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		
Open question	*Connector-kit naming (KCDPKB, KCDPLB, KCDPLA, KCDPMC, KCDPNC) mirrors original Westinghouse frames KB/LB/LA/MC/NC - confirm these are the same connector geometries as original CDP straps.*		

EDH-EAT-00007	KCDPLA400	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013 (SUMTE

CDP breaker connector kit, twin-mount, for LA-P

OEM part number	KCDPLA400	A	S39, S40, S55 RP01400002E p. 14 Table 19; oem_spec

Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
	CDP panelboard breaker connector kit for LA-P 3-pole	A	S55 p.14; oem_spec
Application	branch	A	S39 p. 14; oem_spec
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
	Mounting: Twin; CDP chassis	A	S55 oem_spec
Breaker compatibility	LA-P	A	S39 p. 14 Table 19; oem_spec
	LA-P 3-pole	A	S55 p.14 Table 19; oem_spec
Poles	3	A	S39 p. 14 Table 19; oem_spec
Current rating	400 A (LA-P 70-400 A)	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S55 p.14; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
	6X space (1X = 1.38 in)	A	S55 oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	same as above
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: EB, Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00008	**KCDPLA600**	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013 (SUMTE

CDP breaker connector kit, twin-mount, for LD, HLD, LDC

OEM part number	KCDPLA600	A	S39, S40, S55 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
	CDP panelboard breaker connector kit for LD, HLD, LDC 3-pole	A	S55 p.14; oem_spec
Application	branch	A	S39 p. 14; oem_spec
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
	Mounting: Twin; CDP chassis	A	S55 oem_spec
Breaker compatibility	LD, HLD, LDC	A	S39 p. 14 Table 19; oem_spec
	LD, HLD, LDC 3-pole	A	S55 p.14 Table 19; oem_spec
Poles	3	A	S39 p. 14 Table 19; oem_spec
Current rating	600 A frame	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S55 p.14; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
	6X space (1X = 1.38 in)	A	S55 oem_spec

Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	same as above
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse LA-frame designation	C	S39 p. 14; inference
Cross-links	Families: CDP · Breakers: EB, LA, LC, LD		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00006	**KCDPLB**	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013 (SUMTE

CDP breaker connector kit, twin-mount, for DK, KD, KDB, HKD, KDC

OEM part number	KCDPLB	A	S39, S40, S55 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
	CDP panelboard breaker connector kit for DK, KD, KDB, HKD, KDC 3-pole	A	S55 p.14; oem_spec
Application	branch	A	S39 p. 14; oem_spec
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
	Mounting: Twin; CDP chassis	A	S55 oem_spec
Breaker compatibility	DK, KD, KDB, HKD, KDC	A	S39 p. 14 Table 19; oem_spec
	DK, KD, KDB, HKD, KDC 3-pole	A	S55 p.14 Table 19; oem_spec
Poles	3	A	S39 p. 14 Table 19; oem_spec
Current rating	400 A frame	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S55 p.14; oem_spec
Dimensions	Occupies 5.50 in (139.7 mm) = 4X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
	4X space (1X = 1.38 in)	A	S55 oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	same as above
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse LB-frame designation	C	S39 p. 14; inference
Cross-links	Families: CDP · Breakers: EB, KA, DA, LB, KD		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		
Open question	*Connector-kit naming (KCDPKB, KCDPLB, KCDPLA, KCDPMC, KCDPNC) mirrors original Westinghouse frames KB/LB/LA/MC/NC - confirm these are the same connector geometries as original CDP straps.*		

EDH-EAT-00009	**KCDPLCL**	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013 (SUMTE

CDP breaker connector kit, single-mount, for LCL

OEM part number	KCDPLCL	A	S39, S40, S55 RP01400002E p. 14 Table 19; oem_spec

Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
	CDP panelboard breaker connector kit for LCL 3-pole	A	S55 p.14; oem_spec
Application	branch	A	S39 p. 14; oem_spec
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S39 pp. 10, 14, 17; oem_spec
	Mounting: Single; CDP chassis	A	S55 oem_spec
Breaker compatibility	LCL	A	S39 p. 14 Table 19; oem_spec
	LCL 3-pole	A	S55 p.14 Table 19; oem_spec
Poles	3	A	S39 p. 14 Table 19; oem_spec
Current rating	LCL 125-400 A	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S55 p.14; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S39 p. 14 Table 19; oem_spec
	6X space (1X = 1.38 in)	A	S55 oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	same as above
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: EB, Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00010	KCDPMC	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013 (SUMTE

CDP breaker connector kit, single-mount, for MDL, HMDL

OEM part number	KCDPMC	A	S39, S40, S55 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
	CDP panelboard breaker connector kit for MDL, HMDL 3-pole	A	S55 p.14; oem_spec
Application	branch	A	S39 p. 14; oem_spec
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S39 pp. 10, 14, 17; oem_spec
	Mounting: Single; CDP chassis	A	S55 oem_spec
Breaker compatibility	MDL, HMDL	A	S39 p. 14 Table 19; oem_spec
	MDL, HMDL 3-pole	A	S55 p.14 Table 19; oem_spec
Poles	3	A	S39 p. 14 Table 19; oem_spec
Current rating	800 A frame	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S55 p.14; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S39 p. 14 Table 19; oem_spec
	6X space (1X = 1.38 in)	A	S55 oem_spec

Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	same as above
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse MC-frame designation	C	S39 p. 14; inference
Cross-links	Families: CDP · Breakers: EB, MA, MC, MDL		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00012	KCDPNBP	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013 (SUMTE

CDP breaker connector kit, single-mount, for NB-P

OEM part number	KCDPNBP	A	S39, S40, S55 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
	CDP panelboard breaker connector kit for NB-P 3-pole	A	S55 p.14; oem_spec
Application	branch	A	S39 p. 14; oem_spec
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S39 pp. 10, 14, 17; oem_spec
	Mounting: Single; CDP chassis	A	S55 oem_spec
Breaker compatibility	NB-P	A	S39 p. 14 Table 19; oem_spec
	NB-P 3-pole	A	S55 p.14 Table 19; oem_spec
Poles	3	A	S39 p. 14 Table 19; oem_spec
Current rating	800 A (NB-P 300-800 A)	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S55 p.14; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S39 p. 14 Table 19; oem_spec
	6X space (1X = 1.38 in)	A	S55 oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	same as above
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: EB, Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00011	KCDPNC	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013 (SUMTE

CDP breaker connector kit, single-mount, for ND, HND

OEM part number	KCDPNC	A	S39, S40, S55 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
	CDP panelboard breaker connector kit for ND, HND 3-pole (not rated for 100% breakers)	A	S55 p.14; oem_spec
Application	branch	A	S39 p. 14; oem_spec

Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S39 pp. 10, 14, 17; oem_spec
	Mounting: Single; CDP chassis	A	S55 oem_spec
Breaker compatibility	ND, HND	A	S39 p. 14 Table 19; oem_spec
	ND, HND 3-pole (not rated for 100% breakers)	A	S55 p.14 Table 19; oem_spec
Poles	3	A	S39 p. 14 Table 19; oem_spec
Current rating	1200 A frame; not rated for 100 percent breakers	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S55 p.14; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S39 p. 14 Table 19; oem_spec
	6X space (1X = 1.38 in)	A	S55 oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	same as above
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Identification features	Note b: connector kits are not rated for 100 percent breakers	A	S39 p. 14; oem_spec
Cross-links	Families: CDP · Breakers: EB, NB, NC, ND		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00014	**KCDP_X**	CDP filler cover, any 1X increment (catalog pattern KCDPnX)	—	Listed Feb 2013

EDH-EAT-00014 **KCDP_X** Cutler-Hammer filler-plate **LISTED FEB 2013**

CDP filler cover, any 1X increment (catalog pattern KCDPnX)

OEM part number	KCDP_X (fill in number of X, e.g. KCDP3X) (pattern; example KCDP3X is constructed, not printed)	A	S39 p. 14 'CDP filler covers'; oem_spec
	KCDP_X	A	S55 p.14; oem_spec
Description	CDP filler cover available in any increment of 1X = 1.38 in (35.1 mm); includes cover, mounting brackets and hardware	A	S39 p. 14; oem_spec
	CDP filler covers available in any 1X (1.38 in) increment; catalog KCDP_X with blank = size (e.g. KCDP3X); includes cover, mounting brackets and hardware	A	S55 p.14; oem_spec
Installation location	Closes unused X space on CDP chassis; blank fillers are required for unused X space	A	S38 p. V12-T4-9; oem_spec
Kit contents	Cover, mounting brackets, hardware	A	S39 p. 14; oem_spec
Dimensions	Height = n x 1.38 in (35.1 mm)	A	same as above
Status	Listed Feb 2013	A	S55 oem_spec
Cross-links	Families: CDP		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values, width		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00069	**0080429**	Panelboard trim lock — T-handle lock	—	listed 2013; contact Sumter for price
EDH-EAT-00070	**114C247G01**	Panelboard trim lock — Lock used on lighting and small power panels as standard	—	listed 2013; contact Sumter for price

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00071	**3457B16G01**	Panelboard trim lock — Lock used on lighting and small panels as standard	—	listed 2013; contact Sumter for price
EDH-EAT-00072	**5155C81G01**	Panelboard trim lock — Present-day lock used on standard PRL1, 2 and 3	—	No Longer Available
EDH-EAT-00068	**8450C62H39**	Panelboard trim lock — Trim lock for right-handed door (hinged on right side)	—	listed 2013; contact Sumter for price
EDH-EAT-00067	**K80522**	Panelboard trim lock — Trim lock for left-handed door (hinged on left side)	—	listed 2013; contact Sumter for price

EDH-EAT-00069 — 0080429 — Westinghouse — trim — LISTED 2013; CONTACT S

Panelboard trim lock — T-handle lock

OEM part number	0080429	A	S39 p. 19 Table 22; oem_spec
Description	T-handle lock; once used on all panels over 48.00 in high and on outdoor (N3R) panels	A	same as above
Dimensions	approx. 2.50 in (63.5 mm) per drawing (dimension-to-part association read from figure layout)	C	S39 p. 19 drawing; oem_drawing
Status	listed 2013; contact Sumter for price	A	S39 p. 19; oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3		
Not yet documented	key_code, Material		

EDH-EAT-00070 — 114C247G01 — Westinghouse — trim — LISTED 2013; CONTACT S

Panelboard trim lock — Lock used on lighting and small power panels as standard

OEM part number	114C247G01	A	S39, S55 p. 19 Table 22; oem_spec
Description	Lock used on lighting and small power panels as standard; replacement lock uses WEM-3 key	A	S39 p. 19 Table 22; oem_spec
	Vintage lighting/small power panel trim lock (replacement uses WEM-3 key)	A	S55 oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S55 p.19; oem_spec
Status	listed 2013; contact Sumter for price	A	S39 p. 19; oem_spec
	Listed in renewal parts guide(s) s5	A	S55 oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-00071 — 3457B16G01 — Westinghouse — trim — LISTED 2013; CONTACT S

Panelboard trim lock — Lock used on lighting and small panels as standard

OEM part number	3457B16G01	A	S39, S55 p. 19 Table 22; oem_spec
Description	Lock used on lighting and small panels as standard	A	S39 p. 19 Table 22; oem_spec
	Vintage lighting and small panel standard trim lock	A	S55 oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S55 p.19; oem_spec
Status	listed 2013; contact Sumter for price	A	S39 p. 19; oem_spec
	Listed in renewal parts guide(s) s5	A	S55 oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-00072	5155C81G01	Westinghouse	trim	NO LONGER AVAILABLE

Panelboard trim lock — Present-day lock used on standard PRL1, 2 and 3

OEM part number	5155C81G01	A	S39, S52, S53, S54, S55 p. 19 Table 22; oem_spec
Description	Present-day lock used on standard PRL1, 2 and 3; WEM 2 key — No Longer Available	A	S39 p. 19 Table 22; oem_spec
	Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels (LT trims), WEM 2 key	A	S52, S53, S54, S55 oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S55 p.19; oem_spec
Status	No Longer Available	A	S39 p. 19; oem_spec
	Listed in renewal parts guide(s) s1, s2, s4, s5	A	S52, S53, S54, S55 oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3, PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-00068	8450C62H39	Westinghouse	trim	LISTED 2013; CONTACT S

Panelboard trim lock — Trim lock for right-handed door (hinged on right side)

OEM part number	8450C62H39	A	S39, S54, S55 p. 19 Table 22; oem_spec
Description	Trim lock for right-handed door (hinged on right side)	A	S39 p. 19 Table 22; oem_spec
	Trim lock for right-handed door (vintage / 2011 listing)	A	S54, S55 oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S55 p.19; oem_spec
	3.00 x 1.38 in (76.2 x 35.1 mm) per drawing (dimension-to-part association read from figure layout)	C	S39 p. 19 drawing; oem_drawing
Status	listed 2013; contact Sumter for price	A	S39 p. 19; oem_spec
	Listed in renewal parts guide(s) s4, s5	A	S54, S55 oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3, PRL1A		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-00067	K80522	Westinghouse	trim	LISTED 2013; CONTACT S

Panelboard trim lock — Trim lock for left-handed door (hinged on left side)

OEM part number	K80522	A	S39, S52, S53, S55 p. 19 Table 22; oem_spec
Description	Trim lock for left-handed door (hinged on left side)	A	S39 p. 19 Table 22; oem_spec
	Trim lock for left-handed door (hinged on left)	A	S52, S53, S55 oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S55 p.19; oem_spec
	3.00 x 1.38 in (76.2 x 35.1 mm) per drawing (dimension-to-part association read from figure layout)	C	S39 p. 19 drawing; oem_drawing
Status	listed 2013; contact Sumter for price	A	S39 p. 19; oem_spec
	Listed in renewal parts guide(s) s1, s2, s5	A	S52, S53, S55 oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3, PRL4, PRL1A, PRL2A, PRL3A		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00013	**KCDPFB100-H**	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of '-H' suffix	—	listed 2013

EDH-EAT-00013	KCDPFB100-H	Cutler-Hammer	hardware-kit	LISTED 2013

CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of '-H' suffix

OEM part number	KCDPFB100-H	A	S39 p. 14 (Hardware kit example); oem_spec
Alternate / superseded numbers	KCDPFD100H (2009 edition prints the example as KCDPFD100H; 2013 prints KCDPFB100-H. Likely a typo/format change, not a separate part)	C	S40 alias; RP01400002E (2009) p. 14; oem_spec
Description	Hardware kit: mounting bracket(s), filler plates and mounting hardware ONLY. Formed by adding '-H' to the appropriate CDP connector kit catalog number	A	S39 p. 14; oem_spec
Application	branch	A	same as above
Kit contents	Mounting bracket(s), filler plates, mounting hardware (no copper connectors)	A	same as above
Status	listed 2013	B	S39, S40 p. 14; oem_spec
Cross-links	Families: CDP · Breakers: EHD, FD		
Not yet documented	Dimensions, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Is the -H suffix valid for every KCDP connector kit (e.g. KCDPLB-H, KCDPNC-H)?*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00073	**414A380G02**	Replacement panelboard trim clamp, 2.50 in (CDP, FDP, NQB)	—	Shown as 'No Longer Available' in RP01400002E figure

EDH-EAT-00073	414A380G02	Westinghouse	fastener	SHOWN AS 'NO LONGER AV

Replacement panelboard trim clamp, 2.50 in (CDP, FDP, NQB)

OEM part number	414A380G02	A	S39, S55 p. 19; oem_spec
Description	Trim clamp used to mount Fastrims (concealed trim-mounting hardware); bag of six; some larger panels need more than one bag	A	S39 p. 19; oem_spec
	Trim clamp for CDP, FDP and NQB (2.50 in long) - marked 'No Longer Available'	A	S55 oem_spec
Application	accessory	A	S39 p. 19; oem_spec
Installation location	Used on CDP, FDP and NQB	A	same as above
Kit contents	Bag of six clamps	A	same as above
Dimensions	Overall length 2.50 in (63.5 mm)	A	same as above
Status	Shown as 'No Longer Available' in RP01400002E figure (Placement of 'No Longer Available' label in figure is ambiguous between 414A380G02 and neighbouring item)	B	S55 p.19; oem_spec
Cross-links	Families: CDP, FDP, NLAB		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00024	**KCDPDK**	CDP breaker retrofit kit (Series C DK + connector kit) replacing Westinghouse DA	Replaces existing Westinghouse DA (250-400 A) with Series C DK **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00016	**KCDPEHD**	CDP breaker retrofit kit (Series C EHD + connector kit) replacing Westinghouse EB, EHB	Replaces existing Westinghouse EB, EHB (15-100 A) with Series C EHD **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00018	**KCDPFD**	CDP breaker retrofit kit (Series C FD + connector kit) replacing Westinghouse HFB	Replaces existing Westinghouse HFB (15-150 A) with Series C FD **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00017	**KCDPFDB**	CDP breaker retrofit kit (Series C FDB + connector kit) replacing Westinghouse FB	Replaces existing Westinghouse FB (15-150 A) with Series C FDB **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00020	**KCDPHKD**	CDP breaker retrofit kit (Series C HKD + connector kit) replacing Westinghouse HKA	Replaces existing Westinghouse HKA (70-225 A) with Series C HKD **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00021	**KCDPJD**	CDP breaker retrofit kit (Series C JD + connector kit) replacing Westinghouse KB, HKB	Replaces existing Westinghouse KB, HKB (70-250 A) with Series C JD **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00023	**KCDPJDB**	CDP breaker retrofit kit (Series C JDB + connector kit) replacing Westinghouse JB	Replaces existing Westinghouse JB (70-250 A) with Series C JDB **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00019	**KCDPKD**	CDP breaker retrofit kit (Series C KD + connector kit) replacing Westinghouse KA	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125- **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00022	**KCDPKDB**	CDP breaker retrofit kit (Series C KDB + connector kit) replacing Westinghouse JA	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A) with Ser **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00025	**KCDPLD**	CDP breaker retrofit kit (Series C LD + connector kit) replacing Westinghouse LA, HLA	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00026	**KCDPMDL**	CDP breaker retrofit kit (Series C MDL + connector kit) replacing Westinghouse MA, HMA	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A) wit **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00027	**KCDPND**	CDP breaker retrofit kit (Series C ND + connector kit) replacing Westinghouse NB, HNB	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00015	**TAD3**	TAD3 line-side adapter / spacer kit for Series C K-frame on LB-frame connectors	Series C K family (DK, KD, KDB, HKD, KDC) replacing LB, HLB, LBB or JA **A**	Referenced Feb 2013

EDH-EAT-00024	**KCDPDK**	Cutler-Hammer	conversion-kit	LISTED FEB 2013 (SUMTE

CDP breaker retrofit kit (Series C DK + connector kit) replacing Westinghouse DA

OEM part number	KCDPDK (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	**A**	S39 pp. 12-13 Tables 17-18; oem_spec
	KCDPDK	**A**	S55 p.13 Table 18; p.12 Tables 16-17; oem_spec
Alternate / superseded numbers	Westinghouse DA breaker (existing breaker superseded by this Series C retrofit)	**A**	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C DK breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	**A**	S39 pp. 12-13; oem_spec
	Retrofit kit: one Series C DK breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	**A**	S55 p.12; oem_spec
Application	branch	**A**	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse DA (250-400 A) with Series C DK	**A**	S39 p. 13 Table 18; oem_spec
	Replaces existing Westinghouse DA (250-400 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	**A**	S55 p.13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	**A**	S39 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	**A**	S55 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	**B**	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EB, DA, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00016	KCDPEHD	Cutler-Hammer	conversion-kit	LISTED FEB 2013 (SUMTE

CDP breaker retrofit kit (Series C EHD + connector kit) replacing Westinghouse EB, EHB

OEM part number	KCDPEHD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
	KCDPEHD	A	S55 p.13 Table 18; p.12 Tables 16-17; oem_spec
Alternate / superseded numbers	Westinghouse EB, EHB breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C EHD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
	Retrofit kit: one Series C EHD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S55 p.12; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse EB, EHB (15-100 A) with Series C EHD	A	S39 p. 13 Table 18; oem_spec
	Replaces existing Westinghouse EB, EHB (15-100 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S55 p.13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S55 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EB, EHB, EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00018	KCDPFD	Cutler-Hammer	conversion-kit	LISTED FEB 2013 (SUMTE

CDP breaker retrofit kit (Series C FD + connector kit) replacing Westinghouse HFB

OEM part number	KCDPFD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
	KCDPFD	A	S55 p.13 Table 18; p.12 Tables 16-17; oem_spec
Alternate / superseded numbers	Westinghouse HFB breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C FD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
	Retrofit kit: one Series C FD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S55 p.12; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse HFB (15-150 A) with Series C FD	A	S39 p. 13 Table 18; oem_spec
	Replaces existing Westinghouse HFB (15-150 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S55 p.13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S55 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EB, HFB, EHD, FD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00017	KCDPFDB	Cutler-Hammer	conversion-kit	LISTED FEB 2013 (SUMTE

CDP breaker retrofit kit (Series C FDB + connector kit) replacing Westinghouse FB

OEM part number	KCDPFDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
	KCDPFDB	A	S55 p.13 Table 18; p.12 Tables 16-17; oem_spec
Alternate / superseded numbers	Westinghouse FB breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C FDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
	Retrofit kit: one Series C FDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S55 p.12; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse FB (15-150 A) with Series C FDB	A	S39 p. 13 Table 18; oem_spec
	Replaces existing Westinghouse FB (15-150 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S55 p.13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S55 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EB, FB, EHD, FD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00020	KCDPHKD	Cutler-Hammer	conversion-kit	LISTED FEB 2013 (SUMTE

CDP breaker retrofit kit (Series C HKD + connector kit) replacing Westinghouse HKA

OEM part number	KCDPHKD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
	KCDPHKD	A	S55 p.13 Table 18; p.12 Tables 16-17; oem_spec
Alternate / superseded numbers	Westinghouse HKA breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C HKD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
	Retrofit kit: one Series C HKD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S55 p.12; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse HKA (70-225 A) with Series C HKD	A	S39 p. 13 Table 18; oem_spec
	Replaces existing Westinghouse HKA (70-225 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S55 p.13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S55 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EB, KA, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00021	KCDPJD	Cutler-Hammer	conversion-kit	LISTED FEB 2013 (SUMTE

CDP breaker retrofit kit (Series C JD + connector kit) replacing Westinghouse KB, HKB

OEM part number	KCDPJD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
	KCDPJD	A	S55 p.13 Table 18; p.12 Tables 16-17; oem_spec
Alternate / superseded numbers	Westinghouse KB, HKB breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C JD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
	Retrofit kit: one Series C JD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S55 p.12; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse KB, HKB (70-250 A) with Series C JD	A	S39 p. 13 Table 18; oem_spec
	Replaces existing Westinghouse KB, HKB (70-250 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S55 p.13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S55 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EB, KB, JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00023	KCDPJDB	Cutler-Hammer	conversion-kit	LISTED FEB 2013 (SUMTE

CDP breaker retrofit kit (Series C JDB + connector kit) replacing Westinghouse JB

OEM part number	KCDPJDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
	KCDPJDB	A	S55 p.13 Table 18; p.12 Tables 16-17; oem_spec
Alternate / superseded numbers	Westinghouse JB breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C JDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
	Retrofit kit: one Series C JDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S55 p.12; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse JB (70-250 A) with Series C JDB	A	S39 p. 13 Table 18; oem_spec
	Replaces existing Westinghouse JB (70-250 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S55 p.13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S55 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EB, JB, JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00019	KCDPKD	Cutler-Hammer	conversion-kit	LISTED FEB 2013 (SUMTE

CDP breaker retrofit kit (Series C KD + connector kit) replacing Westinghouse KA

OEM part number	KCDPKD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
	KCDPKD	A	S55 p.13 Table 18; p.12 Tables 16-17; oem_spec
Alternate / superseded numbers	Westinghouse KA breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C KD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
	Retrofit kit: one Series C KD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S55 p.12; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125-400 A) with Series C KD	A	S39 p. 13 Table 18; oem_spec
	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125-400 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S55 p.13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S55 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EB, KA, LB, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		
Open question	*KD onto existing LB connectors requires TAD3 adapter (included in KD retrofit kits).*		

EDH-EAT-00022	KCDPKDB	Cutler-Hammer	conversion-kit	LISTED FEB 2013 (SUMTE

CDP breaker retrofit kit (Series C KDB + connector kit) replacing Westinghouse JA

OEM part number	KCDPKDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
	KCDPKDB	A	S55 p.13 Table 18; p.12 Tables 16-17; oem_spec
Alternate / superseded numbers	Westinghouse JA breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C KDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
	Retrofit kit: one Series C KDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S55 p.12; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A) with Series C KDB	A	S39 p. 13 Table 18; oem_spec
	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S55 p.13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S55 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EB, JA, LB, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		
Open question	*KD onto existing LB connectors requires TAD3 adapter (included in KD retrofit kits).*		

EDH-EAT-00025	KCDPLD	Cutler-Hammer	conversion-kit	LISTED FEB 2013 (SUMTE

CDP breaker retrofit kit (Series C LD + connector kit) replacing Westinghouse LA, HLA

OEM part number	KCDPLD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
	KCDPLD	A	S55 p.13 Table 18; p.12 Tables 16-17; oem_spec
Alternate / superseded numbers	Westinghouse LA, HLA breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C LD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
	Retrofit kit: one Series C LD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S55 p.12; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A) with Series C LD	A	S39 p. 13 Table 18; oem_spec
	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S55 p.13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S55 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EB, LA, LC, LD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00026	KCDPMDL	Cutler-Hammer	conversion-kit	LISTED FEB 2013 (SUMTE

CDP breaker retrofit kit (Series C MDL + connector kit) replacing Westinghouse MA, HMA

OEM part number	KCDPMDL (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
	KCDPMDL	A	S55 p.13 Table 18; p.12 Tables 16-17; oem_spec
Alternate / superseded numbers	Westinghouse MA, HMA breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C MDL breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
	Retrofit kit: one Series C MDL breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S55 p.12; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A) with Series C MDL	A	S39 p. 13 Table 18; oem_spec
	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S55 p.13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S55 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EB, MA, MC, MDL		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00027	KCDPND	Cutler-Hammer	conversion-kit	LISTED FEB 2013 (SUMTE

CDP breaker retrofit kit (Series C ND + connector kit) replacing Westinghouse NB, HNB

OEM part number	KCDPND (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
	KCDPND	A	S55 p.13 Table 18; p.12 Tables 16-17; oem_spec
Alternate / superseded numbers	Westinghouse NB, HNB breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C ND breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
	Retrofit kit: one Series C ND breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S55 p.12; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 A) with Series C ND	A	S39 p. 13 Table 18; oem_spec
	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S55 p.13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S55 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EB, NB, NC, ND		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00015	TAD3	Cutler-Hammer	conversion-kit	REFERENCED FEB 2013

TAD3 line-side adapter / spacer kit for Series C K-frame on LB-frame connectors

OEM part number	TAD3	A	S39, S38, S55 RP01400002E p. 13; V12-T3-11 note 1; V12-T4-7 note 6; oem_spec
Description	Adapter kit required when mounting a Series C KD-frame breaker onto existing LB-frame connectors; included in orders for KD retrofit kits or connector kits, also sold separately	A	S39 p. 13 note; oem_spec
	Adapter kit required when mounting a Series C KD frame breaker onto existing LB frame connectors; included with KD retrofit or connector kits, may be purchased separately	A	S55 p.13; oem_spec
Application	branch (line-side adapter)	A	S38 p. V12-T4-7 note 6; oem_spec
Installation location	Line side of K-frame breaker on CDP chassis existing LB connectors; allows KD opposite LB breakers	A	same as above
Breaker compatibility	Series C K family (DK, KD, KDB, HKD, KDC) replacing LB, HLB, LBB or JA in panelboard applications	A	S39, S38 RP01400002E p. 13; V12-T3-11 note 1; oem_spec
Status	Referenced Feb 2013	A	S55 oem_spec
Cross-links	Families: CDP, PRL4 · Breakers: EB, JA, LB, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Kit contents, Material, Torque values		
Open question	*Exact contents of TAD3 (spacer blocks vs. extended line straps)?*		
Open question	*Is TAD3 also used on WF/WRP switchboard LB provisions?*		

3.3 FDP — Westinghouse FDP fusible panelboard

FAM-EAT-008 · panelboard · aka FDP, Westinghouse FDP · markings: Westinghouse

Westinghouse fusible distribution panelboard sharing CDP chassis geometry (3.50 in phase centers, 19.50 in rails). FDPW/FDPB switch connector kits fit only 3.50 in bus spacing; if bus spacing is 4.25 in no parts are available. Circuit breakers can be added to an FDP via a 'picture frame' transition (+2X).

Westinghouse fusible distribution panelboard (30-50 in wide). FDPW/FDPB switch connector kits KFDP* require 3.50 in bus spacing.

Attribute	Value	Cl.	Sources
Status	discontinued; replacement panelboard type PRL4F	A	S38 p. V12-T4-7; oem_spec
	Obsolete; switch retrofit/connector kits available	A	S55 oem_spec
Era of manufacture	Vintage Westinghouse	C	S55 inference
Successor	PRL4F	A	S38 p. V12-T4-7; oem_spec
	PRL4F (functional)	D	S55 inference
Main ampacity	1600 A maximum	A	S38 p. V12-T4-10; oem_spec
Branch breakers accepted	FDP fusible switches 30-1200 A; current replacements FDPW (30-100 A twin, 400-1200 A) and FDPB (200 A) switches via KFDP connector/retrofit kits	A	S39 pp. 17-18; oem_spec
	FDPW / FDPB fusible switches 30-1200 A (retrofit); breakers via 'picture frame' adapter (+2X)	A	S55 pp.17-18; oem_spec
bus_spacing_limit	Vertical bus bars must be 3.50 in center-line phase to phase; if 4.25 in, switches will not fit and no parts are available	A	S39 p. 17; oem_spec
breaker_in_fdp	To install circuit breakers in an FDP panel a 'picture frame' is required; add 2X to breaker size for the transition (contact Sumter)	A	S39 p. 18; oem_spec
layout	Main lug section 5X 225 A, 8X 250-400 A, 9X 600 A, 12X 800-1600 A; switches 30/60/100 A 4X, 100 A 600 V 5X, 200 A 6X, 400/600 A 11X, 800/1200 A 16X horizontal or 21X vertical	A	S38 p. V12-T4-10; oem_spec

Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S39 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD; S55 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P

Also fits this family (entry printed elsewhere): KFDP4XT, KFDP5XT, KFDPB6X-2, KFDPW9X-4, KFDPW11X-6, KFDPW11X-8, KFDPW15X-12, K80522, 8450C62H39, 0080429, 114C247G01, 3457B16G01, 5155C81G01, 414A380G02

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00035	**KFDP_X**	FDP filler cover, any 1X increment (catalog pattern KFDPnX)	—	Listed Feb 2013

EDH-EAT-00035 **KFDP_X** Cutler-Hammer filler-plate **LISTED FEB 2013**

FDP filler cover, any 1X increment (catalog pattern KFDPnX)

OEM part number	KFDP_X (fill in size)	A	S39 p. 17 'FDP filler covers'; oem_spec
	KFDP_X	A	S55 p.17; oem_spec
Description	FDP filler cover available in any 1X (1.38 in / 35.1 mm) increment; includes cover, mounting brackets and hardware	A	S39 p. 17; oem_spec
	FDP filler covers in any 1X (1.38 in) increment; catalog KFDP_X; includes cover, mounting brackets and hardware	A	S55 oem_spec
Kit contents	Cover, mounting brackets, hardware	A	S39 p. 17; oem_spec
Status	Listed Feb 2013	A	S55 oem_spec
Cross-links	Families: FDP		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00042	**KFDPBS324R**	FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00043	**KFDPBS364R**	FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00044	**KFDPW325R**	FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00046	**KFDPW326R**	FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00045	**KFDPW365R**	FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00047	**KFDPW366R**	FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00048	**KFDPW367**	FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)	—	unknown
EDH-EAT-00049	**KFDPW368**	FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)	—	unknown
EDH-EAT-00036	**KFDPWT3211R**	FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00038	**KFDPWT3222R**	FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00040	**KFDPWT3233R**	FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00037	**KFDPWT3611R**	FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00039	**KFDPWT3622R**	FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00041	**KFDPWT3633R**	FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)	—	unknown

EDH-EAT-00042 **KFDPBS324R** Cutler-Hammer conversion-kit **STATUS UNKNOWN**

FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)

OEM part number	KFDPBS324R	**A**	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	**A**	S39 p. 17; oem_spec
Application	branch	**A**	same as above
Poles	3	**A**	same as above
Voltage rating	240 V	**A**	S39 p. 17 Table 20; oem_spec
Current rating	200 A	**A**	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	**A**	S39 p. 17; oem_spec
Dimensions	6X of chassis height	**A**	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00043	KFDPBS364R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)

OEM part number	KFDPBS364R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	6X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00044	KFDPW325R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)

OEM part number	KFDPW325R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S39 p. 17 Table 20; oem_spec
Current rating	400 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	9X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00046	KFDPW326R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)

OEM part number	KFDPW326R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S39 p. 17 Table 20; oem_spec
Current rating	600 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	11X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00045	KFDPW365R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)

OEM part number	KFDPW365R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	400 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	9X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00047	KFDPW366R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)

OEM part number	KFDPW366R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	600 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	11X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00048	KFDPW367	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)

OEM part number	KFDPW367	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240/600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	800 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	11X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00049	KFDPW368	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)

OEM part number	KFDPW368	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240/600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	1200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	15X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00036	KFDPWT3211R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)

OEM part number	KFDPWT3211R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S39 p. 17 Table 20; oem_spec
Current rating	30 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	4X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00038	KFDPWT3222R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)

OEM part number	KFDPWT3222R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S39 p. 17 Table 20; oem_spec
Current rating	60 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	4X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00040	KFDPWT3233R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)

OEM part number	KFDPWT3233R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S39 p. 17 Table 20; oem_spec
Current rating	100 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	4X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00037	KFDPWT3611R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)

OEM part number	KFDPWT3611R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	30 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	4X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00039	KFDPWT3622R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)

OEM part number	KFDPWT3622R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	60 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	4X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00041	KFDPWT3633R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)

OEM part number	KFDPWT3633R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	100 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	5X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

3.4 NAB — Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards

FAM-EAT-013 · panelboard · aka NAB, NA1B, NH1B, NHB, NDP, NHDP, NEB, NHEB, ABH, A2B · markings: Westinghouse

Westinghouse 1937-1988 lighting/appliance and distribution panelboards using E-family plug/bolt breakers. Branch breakers replaced by 'panelboard only' R-prefix breakers (REH, RHF, RHFA) supplied with mounting hardware; connector kits not available. The scope term 'NHB' is not used in Vol 12; nearest OEM designations are NH1B and NHEB.

Attribute	Value	Cl.	Sources
Status	discontinued; connectors not available; replacement panelboard PRL3a (NAB, NA1B, NDP, NEB, NHDP, NHEB, ABH) or PRL2a (NH1B); panelboard-only replacement breaker REH/RHFA	A	S38 p. V12-T4-7; oem_spec
Branch breakers accepted	E, EA, EAH, EH, FA, E-277 (replacement breaker REH; RHFA for FA)	A	same as above

Breaker families associated: E, F
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions

3.5 NLAB — Westinghouse NLAB lighting panelboard

FAM-EAT-012 · panelboard · aka NLAB, NLAB-LX, NLAB-AB, NLAB-ABH, NPLAB, NQB, NQP, NQC · markings: Westinghouse

Westinghouse plug-in/bolt-on lighting panelboards for Quicklag-type Q breakers. Vol 12 flags 'connectors not available' for this group; replacement is a new PRL1a/PRL3a interior. CDP/FDP/NQB trim clamp 414A380G02 still applies to NQB.

Attribute	Value	Cl.	Sources
Status	discontinued; connectors not available; replace panelboard with PRL1a (NLAB, NPLAB, NQB, NQP, NQC), PRL1aLX (NLAB-LX), PRL3a (NLAB-AB/ABH)	A	S38 p. V12-T4-7; oem_spec
Era of manufacture	Westinghouse panelboards manufactured between 1937 and 1988	A	same as above
Branch breakers accepted	NLAB: QC; NPLAB/NQP: QP (new breaker HQP); NQB: BA (new BAB); NQC: QC	A	same as above
connectors	Connectors not available (note 2) for NLAB, NLAB-LX, NLAB-AB, NLAB-ABH, NPLAB, NQB, NQC, NQP	A	same as above

Breaker families associated: BAB
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions
Also fits this family (entry printed elsewhere): 414A380G02

3.6 PRC — Pow-R-Command lighting control panelboard

FAM-EAT-026 · panelboard · aka Pow-R-Command, PRCE · markings: Cutler-Hammer, Eaton

Lighting control panelboard based on PRL3a/3X chassis; renewal parts (connector kits, grounds, SE kits, deadfronts, trim locks) are per PRL3X/PRL3a section.

Attribute	Value	Cl.	Sources
Status	Current (Pow-R-Command E series in 2020 catalog)	A	S56 oem_spec
Era of manufacture	Introduced March 1996	A	S52, S53 p.2; oem_spec
Voltage rating	240 or 480Y/277 Vac	A	S56 p.V2-T3-3; oem_spec
Main ampacity	400 A max MLO/main	A	S56 oem_spec
Branch breakers accepted	Bolt-on breakers 225 A max incl. remote-operated breakers	A	same as above

Key documents: S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S53 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S56 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control

Also fits this family (entry printed elsewhere): KPRL3ABA06, KPRL3ABA06-1, KPRL3ABA12, KPRL3ABA12-1, KPRL3ABA18, KPRL3ABA18-1, KPRL3ABA24, KPRL3ABA24-1, KPRL3AGB06, KPRL3AGB06-1, KPRL3AGB12, KPRL3AGB12-1, KPRL3AGB18, KPRL3AGB18-1, KPRL3AGB24, KPRL3AGB24-1, 5078A98, 5158C05, 2C11296, 6559C59, 4176B72, 4180B91

3.7 PRL-LX — Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)

FAM-EAT-024 · panelboard · aka PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX, column panelboard · markings: Cutler-Hammer, Eaton

Narrow column-width lighting panels (box YSC969-YSC990, trims LTC/LTCD). Renewal parts listed are boxes and trims only.

Attribute	Value	Cl.	Sources
Status	Legacy (a) / current (X)	A	S52, S56 oem_spec
Era of manufacture	PRL1a/2a-LX introduced December 1997	A	S52, S53 p.2; oem_spec
Successor	PRL1X-LX / PRL2X-LX	A	S56 oem_spec
Voltage rating	PRL1a-LX 240 Vac; PRL2a-LX 480Y/277 Vac, 125/250 Vdc	A	S57 p.22.0-5; oem_spec
Main ampacity	225 A max MLO or main	A	same as above
Branch breakers accepted	Bolt-on breakers 15-30 A (a-LX per s7) / 15-100 A (X-LX per s6)	A	S56, S57 oem_spec

Key documents: S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S53 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S56 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S57 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

3.8 PRL1/PRL2 — Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)

FAM-EAT-009 · panelboard · aka POW-R-LINE, PRL1, PRL1-LX, PRL2, Pow-R-Line 1, Pow-R-Line 2 · markings: Westinghouse

Vintage Westinghouse lighting (PRL1) and 480Y/277 V (PRL2) panelboards, 20 in wide boxes, neutral at top. Replacement connector kits KPRL1BAB / KPRL2GHB mount up to 12 poles.

Original Westinghouse Pow-R-Line lighting panelboards on 20 in wide boxes (YS20xx, 5.75 in deep) with gutter neutral; trims LT20xxS/F. Branch connector kits hold two sets of A/B/C connectors for 12 poles, silver-plated copper suitable for Cu or Al bus, max 140 A per connector. Branch deadfronts 5156C10 (PRL1) / 5156C09 (PRL2).

Attribute	Value	Cl.	Sources
Status	discontinued; replaced by PRL1a / PRL2a	A	S38 p. V12-T4-8; oem_spec
	Obsolete; limited renewal parts (Sumter Aftermarket Center) per Feb 2013 guide	A	S55 oem_spec
Era of manufacture	Westinghouse panelboards manufactured after 1988 (1988 redesign for Series C)	A	S38 pp. V12-T4-2, V12-T4-8; oem_spec
	Pre-1993 Westinghouse (pre-'Pow-R-Line C'); surplus example PRL1 dated 9/88 (Era bracket from s1 statement that Pow-R-Line C introduced 1993; date of first PRL1 not found)	C	S55 inference
Successor	PRL1a / PRL2a (functional successor)	C	S52, S55 inference
Voltage rating	PRL1 240 V class (BAB); PRL2 480Y/277 (GHB) - inferred from replacement connector kits	C	S55 inference

Attribute	Value	Cl.	Sources
Main ampacity	600 A maximum	A	S38 p. V12-T4-15; oem_spec
Branch breakers accepted	PRL1: BAB, QBHW, HQP, QPHW; PRL2: GB, GHB, GHBS	A	S38 p. V12-T4-8; oem_spec
	PRL1: BAB-family QUICKLAG; PRL2: GHB-family (from replacement connector kits KPRL1BAB / KPRL2GHB)	A	S55 p.3 Table 1; oem_spec
box_width	Standard width 20.00 in; box depth 5.75 in	A	S39 pp. 2-3; oem_spec
box	20.00 in wide x 5.75 in deep boxes YS2021-YS2090 (21-90 in high)	A	S55 p.3 Table 2; oem_spec

Breaker families associated: BAB, GB
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S39 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD; S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S55 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P
Also fits this family (entry printed elsewhere): K80522, 8450C62H39, 0080429, 114C247G01, 3457B16G01, 5155C81G01, 5158C05

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00050	**KPRL1BAB**	PRL1 replacement branch connector kit (BAB/QBHW), up to 12 poles	BAB-family QUICKLAG (inferred from catalog number; table names panel t C	Listed in RP01400002E (Feb 2013)
EDH-EAT-00051	**KPRL2GHB**	PRL2 replacement branch connector kit (GB/GHB), up to 12 poles	GHB-family (inferred from catalog number; table names panel type only) C	Listed in RP01400002E (Feb 2013)

EDH-EAT-00050 **KPRL1BAB** Cutler-Hammer branch-connector-kit **LISTED IN RP01400002E**

PRL1 replacement branch connector kit (BAB/QBHW), up to 12 poles

OEM part number	KPRL1BAB	A	S39, S55 p. 3 Table 1; oem_spec
Description	Replacement connectors for vintage PRL1: two sets of A, B and C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S39 p. 3; oem_spec
	Replacement connectors for PRL1: two sets of A, B, C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S55 p.3; oem_spec
Application	branch	A	S39 p. 3; oem_spec
Breaker compatibility	BAB-family QUICKLAG (inferred from catalog number; table names panel type only)	C	S55 inference
Current rating	Maximum amperes connected to any one connector cannot exceed 140 A	A	S39 p. 3; oem_spec
	Max 140 A connected to any one connector	A	S55 p.3; oem_spec
Material	Silver-plated copper connectors, suitable for copper or aluminum bus	A	S39 p. 3; oem_spec
	Silver-plated copper; suitable for copper or aluminum bus	A	S55 p.3; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S55 oem_spec
Cross-links	Families: PRL1/PRL2 · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00051	KPRL2GHB	Cutler-Hammer	branch-connector-kit	LISTED IN RP01400002E

PRL2 replacement branch connector kit (GB/GHB), up to 12 poles

OEM part number	KPRL2GHB	A	S39, S55 p. 3 Table 1; oem_spec
Description	Replacement connectors for vintage PRL2: two sets of A, B and C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S39 p. 3; oem_spec
	Replacement connectors for PRL2: two sets of A, B, C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S55 p.3; oem_spec
Application	branch	A	S39 p. 3; oem_spec
Breaker compatibility	GHB-family (inferred from catalog number; table names panel type only)	C	S55 inference
Current rating	Maximum 140 A connected to any one connector	A	S39 p. 3; oem_spec
	Max 140 A connected to any one connector	A	S55 p.3; oem_spec
Material	Silver-plated copper connectors, suitable for copper or aluminum bus	A	S39 p. 3; oem_spec
	Silver-plated copper; suitable for copper or aluminum bus	A	S55 p.3; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S55 oem_spec
Cross-links	Families: PRL1/PRL2 · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00360	**5158C03**	Vintage PRL1/PRL2 neutral bar, 100 A and 225 A	—	Listed Feb 2013
EDH-EAT-00056	**5158C03G01**	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)	—	unknown
EDH-EAT-00055	**5158C03G02**	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number)	—	unknown
EDH-EAT-00058	**5158C03G03**	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)	—	unknown
EDH-EAT-00057	**5158C03G04**	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number)	—	unknown
EDH-EAT-00059	**5158C04G01**	PRL1/PRL2 400/600 A neutral bar (Westinghouse style number)	—	Listed Feb 2013

EDH-EAT-00360	5158C03	Westinghouse	neutral-assembly	LISTED FEB 2013

Vintage PRL1/PRL2 neutral bar, 100 A and 225 A

OEM part number	5158C03	A	S55 p.4 Table 3; oem_spec
Description	Vintage PRL1/PRL2 neutral bar, 100 A and 225 A (G02 100 A >=30 in box; G01 100 A <30 in; G04 225 A >=30 in; G03 225 A <30 in)	A	same as above
Status	Listed Feb 2013	A	S55 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00056	5158C03G01	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)

OEM part number	5158C03G01	A	S39 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S39 style_number; p. 2 item 3; oem_spec
Description	100 A neutral bar, boxes less than 30.00 in high	A	S39 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00055	5158C03G02	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number)

OEM part number	5158C03G02	A	S39 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S39 style_number; p. 2 item 3; oem_spec
Description	100 A neutral bar, boxes 30.00 in and above	A	S39 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00058	5158C03G03	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)

OEM part number	5158C03G03	A	S39 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S39 style_number; p. 2 item 3; oem_spec
Description	225 A neutral bar, boxes less than 30.00 in high	A	S39 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00057	5158C03G04	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number)

OEM part number	5158C03G04	A	S39 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S39 style_number; p. 2 item 3; oem_spec
Description	225 A neutral bar, boxes 30.00 in and above	A	S39 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00059	5158C04G01	Westinghouse	neutral-assembly	LISTED FEB 2013

PRL1/PRL2 400/600 A neutral bar (Westinghouse style number)

OEM part number	5158C04G01	A	S39, S55 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S39 style_number; p. 2 item 3; oem_spec
Description	400/600 A neutral bar	A	S39 p. 4 Table 3; oem_spec
	Vintage PRL1/PRL2 400/600 A neutral bar	A	S55 p.4 Table 3; oem_spec
Status	Listed Feb 2013	A	S55 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, lug_count, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00061	**5158C05G01**	PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)	—	unknown
EDH-EAT-00060	**5158C05G02**	PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)	—	unknown
EDH-EAT-00063	**5158C05G05**	PRL1/PRL2/PRL3 isolated ground bar, boxes less than 30.00 in high (style number)	—	Listed Feb 2013
EDH-EAT-00062	**5158C05G06**	PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)	—	unknown

EDH-EAT-00061	5158C05G01	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)

OEM part number	5158C05G01	A	S39 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	standard ground bar, boxes less than 30.00 in high	A	S39 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

EDH-EAT-00060	5158C05G02	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)

OEM part number	5158C05G02	A	S39 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	standard ground bar, boxes 30.00 in and above	A	S39 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

EDH-EAT-00063	5158C05G05	Westinghouse	ground-bar	LISTED FEB 2013

PRL1/PRL2/PRL3 isolated ground bar, boxes less than 30.00 in high (style number)

OEM part number	5158C05G05	A	S39, S55 p. 5 Table 5; p. 6 Table 7; oem_spec
Alternate / superseded numbers	5158C05G06 (boxes 30 in and above)	A	S55 style_number; p.5; oem_spec
Description	isolated ground bar, boxes less than 30.00 in high	A	S39 p. 5 Table 5; oem_spec
	Isolated ground bar for vintage PRL1/PRL2, boxes less than 30 in high (G06 for 30 in and above)	A	S55 p.5 Table 5; oem_spec
Status	Listed Feb 2013	A	S55 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00062	5158C05G06	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)

OEM part number	5158C05G06	A	S39 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	isolated ground bar, boxes 30.00 in and above	A	S39 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Material		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00410	**5156C09**	Vintage PRL2 branch section deadfront cover	—	Listed Feb 2013
EDH-EAT-00409	**5156C10**	Vintage PRL1 branch section deadfront cover	—	Listed Feb 2013

EDH-EAT-00410	5156C09	Westinghouse	deadfront	LISTED FEB 2013

Vintage PRL2 branch section deadfront cover

OEM part number	5156C09	A	S55 p.5 Table 6; oem_spec
Alternate / superseded numbers	H01-H09 (12-60 circuits, 10-34 in high; same heights as 5156C10)	A	S55 style_number; oem_spec
Description	PRL2 branch section deadfront cover	A	same as above
Status	Listed Feb 2013	A	same as above
Cross-links	Families: PRL1/PRL2 · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00409	5156C10	Westinghouse	deadfront	LISTED FEB 2013

Vintage PRL1 branch section deadfront cover

OEM part number	5156C10	A	S55 p.5 Table 6; oem_spec
Alternate / superseded numbers	H01 12 ckt 10 in; H02 18/13 in; H03 24/16 in; H04 30/19 in; H05 36/22 in; H06 42/25 in; H07 48/28 in; H08 54/31 in; H09 60/34 in	A	S55 style_number; p.5; oem_spec
Description	PRL1 branch section deadfront cover by max number of circuits	A	S55 oem_spec
Status	Listed Feb 2013	A	same as above
Cross-links	Families: PRL1/PRL2 · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00066	**3456B35H01**	PRL1/PRL2 blank cover 6.00 in high (style number)	—	Listed Feb 2013
EDH-EAT-00065	**3456B99H01**	PRL1/PRL2 blank cover 3.00 in high (style number)	—	Listed Feb 2013
EDH-EAT-00064	**3456B99H05**	PRL1/PRL2 blank cover 15.00 in high (style number)	—	Listed Feb 2013

EDH-EAT-00066	3456B35H01	Westinghouse	filler-plate	LISTED FEB 2013

PRL1/PRL2 blank cover 6.00 in high (style number)

OEM part number	3456B35H01	A	S39, S55 p. 4 Table 4; oem_spec
Description	Blank cover, height 6.00 in (152.4 mm)	A	same as above
Dimensions	Height 6.00 in (152.4 mm)	A	same as above
Status	Listed Feb 2013	A	S55 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

EDH-EAT-00065	3456B99H01	Westinghouse	filler-plate	LISTED FEB 2013

PRL1/PRL2 blank cover 3.00 in high (style number)

OEM part number	3456B99H01	A	S39, S55 p. 4 Table 4; oem_spec
Description	Blank cover, height 3.00 in (76.2 mm)	A	same as above
Dimensions	Height 3.00 in (76.2 mm)	A	same as above
Status	Listed Feb 2013	A	S55 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

EDH-EAT-00064	3456B99H05	Westinghouse	filler-plate	LISTED FEB 2013

PRL1/PRL2 blank cover 15.00 in high (style number)

OEM part number	3456B99H05	A	S39, S55 p. 4 Table 4; oem_spec
Description	Blank cover, height 15.00 in (381.0 mm)	A	same as above
Dimensions	Height 15.00 in (381.0 mm)	A	same as above
Status	Listed Feb 2013	A	S55 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00458	**7494A11G02**	Vintage Fastrim trim clamps for B10B and PRL1/2/3	—	Listed in s5

EDH-EAT-00458	7494A11G02	Cutler-Hammer	hardware-kit	LISTED IN S5

Vintage Fastrim trim clamps for B10B and PRL1/2/3

OEM part number	7494A11G02	A	S55 oem_spec
Description	Vintage Fastrim trim clamps for B10B and PRL1/2/3 (bag of 6, 3.13 in long)	A	same as above
Status	Listed in s5	A	same as above
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00074	**414A380G01**	Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)	—	unknown
EDH-EAT-00075	**8712C73H01**	Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3	—	unknown

EDH-EAT-00074	414A380G01	Westinghouse	fastener	STATUS UNKNOWN

Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)

OEM part number	414A380G01	A	S39 p. 8 Fastrim; oem_spec
Description	Flush Fastrim uses Style Number 414A380G01 trim clamps (supplied with the trim)	A	S39 p. 8; oem_spec
Dimensions	Overall length 3.13 in (79.5 mm); used on B10B and PRL1, 2, 3 (p.19 shows a 3.13 in clamp for B10B/PRL1-3 next to 414A380G02; association with G01 inferred from layout and p.8)	C	S39 p. 19; oem_drawing
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Material		

EDH-EAT-00075	8712C73H01	Westinghouse	fastener	STATUS UNKNOWN

Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3

OEM part number	8712C73H01	A	S39 p. 8 Fastrim; oem_spec
Description	Surface Fastrim uses Style Number 8712C73H01 trim clamps; clamps included and shipped with the trim	A	S39 p. 8; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

3.9 PRL1A — Pow-R-Line 1a

FAM-EAT-016 · panelboard · aka PRL1a, PRL-1A, Pow-R-Line 1a, POW-R-LINE 1A · markings: Cutler-Hammer, Eaton

Cutler-Hammer/Eaton 240 Vac lighting & appliance panelboard on a 20 in wide box, neutral located in the side gutter. Branch QUICKLAG breakers mount horizontally on factory connector strips (bolt-on 1C96608 or plug-on 2C11642 assemblies); mains, sub-feed breakers and main/sub-feed/through-feed lugs mount vertically on KB/KL connector kits. Fully rated 10/22 kA, series rated to 200 kA at 240 Vac. Suitable for service entrance when specified (PRLSEB barrier kits, 4180B62 bonding jumper). Note: Eaton literature also uses the umbrella name 'Pow-R-Line C' for Series C breaker panelboards; that name is not unique to PRL1a and is also the name of the PRLC switchboard.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts still listed April 2021. Superseded by PRL1X (Pow-R-Line Xpert, introduced 2020; time line shows PRL1X/2X/3X/4X from May 2020)	A	S52 p.2 Table 1; oem_spec
Era of manufacture	Introduced October 1996 (Cutler-Hammer); part of 'Pow-R-Line C' line introduced 1993	A	S52, S53 s1 p.2 Table 1; s2 p.2 Table 1; oem_spec
Successor	PRL1X	A	S52, S56 s1 p.2; oem_spec
Voltage rating	240 Vac maximum	A	S57 p.22.0-5 Table 22.0-2; p.22.1-1; oem_spec
Main ampacity	Main lugs 100, 225, 400, 600 A; main breakers 100-600 A (MLO and main device 600 A max)	A	S57 p.22.1-1; oem_spec
Branch breakers accepted	Bolt-on QUICKLAG BAB/QBHW (incl. GF/AFCI/RP variants) or plug-on HQP/QPHW chassis, 15-100 A, 1-3 pole. Mains: BAB/QBHW (100 A, horizontal), EHD, FDB, FD/FDE, HFD/HFDE, FDC/FDCE, EDB, EDS, ED, EDH, EDC, JD/HJD/JDC, DK/KD/HKD/KDC, LHH, LGE/LGS/LGH/LGC/LGU	A	S57 p.22.1-1 Tables 22.1-1, 22.1-2; oem_spec

Attribute	Value	Cl.	Sources
box_width	20.00 in (508.0 mm) standard width	A	S52 p.2; oem_spec
Identification features	Neutral bar in side gutter (Figure 1); same position as PRL1X/2X/2a	A	S52 p.2 Figure 1; oem_spec
branch_connector_limit	Sum of horizontally twin-mounted plug-on breakers shall not exceed 140 A; CTL panels max 42 circuits per enclosure	A	S52 p.9 Table 9 notes; oem_spec

Breaker families associated: BAB, ED, EHD, JD, KD, Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH
Key documents: S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S53 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S56 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S57 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/
Also fits this family (entry printed elsewhere): K80522, 8450C62H39, 5155C81G01

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00133	**KB11AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00132	**KB11AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00135	**KB11SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00134	**KB11SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00129	**KB13AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00128	**KB13AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00131	**KB13SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00130	**KB13SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00141	**KB21AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00140	**KB21AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00143	**KB21SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00142	**KB21SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00137	**KB23AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00136	**KB23AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00139	**KB23SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00138	**KB23SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC A	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00149	**KB41AJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00148	**KB41AJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00157	**KB41AKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00156	**KB41AKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00151	**KB41SJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00150	**KB41SJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00159	**KB41SKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00158	**KB41SKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00145	**KB43AJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00144	**KB43AJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00153	**KB43AKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00152	**KB43AKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00147	**KB43SJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00146	**KB43SJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00155	**KB43SKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00154	**KB43SKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00133	KB11AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB11AFB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	100 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00132	KB11AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB11AFT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	100 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00135	KB11SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB11SFB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	100 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00134	KB11SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB11SFT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	100 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00129	KB13AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB13AFB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	100 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00128	KB13AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB13AFT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	100 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00131	KB13SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB13SFB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	100 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00130	KB13SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB13SFT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	100 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00141	KB21AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB21AFB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	225 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00140	KB21AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB21AFT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	225 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00143	KB21SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB21SFB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	225 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00142	KB21SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB21SFT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	225 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00137	KB23AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB23AFB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	225 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00136	KB23AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB23AFT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	225 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00139	KB23SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB23SFB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	225 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00138	KB23SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB23SFT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S52, S53 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	225 A max	A	S52 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00149	KB41AJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB41AJB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00148	KB41AJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, tin-plated aluminum connector

OEM part number	KB41AJT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00157	KB41AKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB41AKB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00156	KB41AKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, tin-plated aluminum connector

OEM part number	KB41AKT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00151	KB41SJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, silver-plated copper connector

OEM part number	KB41SJB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00150	KB41SJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, silver-plated copper connector

OEM part number	KB41SJT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00159	KB41SKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, silver-plated copper connector

OEM part number	KB41SKB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00158	KB41SKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, silver-plated copper connector

OEM part number	KB41SKT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S52 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00145	KB43AJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB43AJB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00144	KB43AJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, tin-plated aluminum connector

OEM part number	KB43AJT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00153	KB43AKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB43AKB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00152	KB43AKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, tin-plated aluminum connector

OEM part number	KB43AKT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00147	KB43SJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, silver-plated copper connector

OEM part number	KB43SJB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00146	KB43SJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, silver-plated copper connector

OEM part number	KB43SJT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00155	KB43SKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, silver-plated copper connector

OEM part number	KB43SKB	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00154	KB43SKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, silver-plated copper connector

OEM part number	KB43SKT	A	S52, S53 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S52, S53 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S52 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S52, S53 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S52 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S52 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S52 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00198	**KL11AMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00190	**KL11AMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00210	**KL11AVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00202	**KL11AVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00217	**KL11SCO**	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00213	**KL11SCS**	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00199	**KL11SMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00191	**KL11SMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00211	**KL11SVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00203	**KL11SVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00196	**KL13AMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00188	**KL13AMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00208	**KL13AVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00200	**KL13AVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00216	**KL13SCO**	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00212	**KL13SCS**	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00197	**KL13SMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00189	**KL13SMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00209	**KL13SVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00201	**KL13SVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00228	**KL21AMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00220	**KL21AMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00240	**KL21AVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00232	**KL21AVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00247	**KL21SCO**	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00243	**KL21SCS**	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00229	**KL21SMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00221	**KL21SMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00241	**KL21SVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00233	**KL21SVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00226	**KL23AMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00218	**KL23AMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00238	**KL23AVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00230	**KL23AVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00246	**KL23SCO**	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00242	**KL23SCS**	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00227	**KL23SMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00219	**KL23SMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00239	**KL23SVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00231	**KL23SVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00254	**KL41AMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00250	**KL41AMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00262	**KL41AVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00258	**KL41AVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00265	**KL41SCO**	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00255	**KL41SMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00251	**KL41SMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00263	**KL41SVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00259	**KL41SVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00252	**KL43AMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00248	**KL43AMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00260	**KL43AVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00256	**KL43AVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00264	**KL43SCO**	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00253	**KL43SMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00249	**KL43SMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00261	**KL43SVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00257	**KL43SVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00275	**KL61CMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00269	**KL61CMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00287	**KL61CVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00281	**KL61CVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00276	**KL61SMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00270	**KL61SMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00288	**KL61SVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00282	**KL61SVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00277	**KL61TMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00271	**KL61TMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00289	**KL61TVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00283	**KL61TVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00272	**KL63CMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00266	**KL63CMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00284	**KL63CVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00278	**KL63CVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00273	**KL63SMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00267	**KL63SMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00285	**KL63SVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00279	**KL63SVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00274	**KL63TMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00268	**KL63TMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00286	**KL63TVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00280	**KL63TVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00198	KL11AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL11AMO	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00190	KL11AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL11AMS	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00210	KL11AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL11AVO	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00202	KL11AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL11AVS	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00217	KL11SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SCO	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00213	KL11SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SCS	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00199	KL11SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SMO	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00191	KL11SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SMS	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00211	KL11SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL11SVO	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00203	KL11SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL11SVS	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00196	KL13AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL13AMO	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00188	KL13AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL13AMS	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00208	KL13AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL13AVO	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00200	KL13AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL13AVS	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00216	KL13SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SCO	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00212	KL13SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SCS	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00197	KL13SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SMO	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00189	KL13SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SMS	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00209	KL13SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL13SVO	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00201	KL13SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL13SVS	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00228	KL21AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL21AMO	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00220	KL21AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL21AMS	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00240	KL21AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL21AVO	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00232	KL21AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL21AVS	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00247	KL21SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SCO	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00243	KL21SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SCS	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00229	KL21SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SMO	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00221	KL21SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SMS	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00241	KL21SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL21SVO	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00233	KL21SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL21SVS	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00226	KL23AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL23AMO	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00218	KL23AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL23AMS	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00238	KL23AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL23AVO	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00230	KL23AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL23AVS	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00246	KL23SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SCO	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00242	KL23SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SCS	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00227	KL23SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SMO	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00219	KL23SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SMS	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00239	KL23SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL23SVO	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00231	KL23SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL23SVS	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00254	KL41AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL41AMO	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00250	KL41AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL41AMS	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00262	KL41AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL41AVO	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00258	KL41AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL41AVS	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00265	KL41SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL41SCO	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00255	KL41SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL41SMO	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00251	KL41SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL41SMS	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00263	KL41SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL41SVO	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00259	KL41SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL41SVS	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00252	KL43AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL43AMO	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00248	KL43AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL43AMS	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00260	KL43AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL43AVO	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00256	KL43AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL43AVS	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00264	KL43SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL43SCO	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00253	KL43SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL43SMO	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00249	KL43SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL43SMS	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00261	KL43SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL43SVO	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00257	KL43SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL43SVS	A	S52 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	400 A	A	S52 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00275	KL61CMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, bare copper connector

OEM part number	KL61CMO	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00269	KL61CMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, bare copper connector

OEM part number	KL61CMS	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00287	KL61CVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, bare copper connector

OEM part number	KL61CVO	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00281	KL61CVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, bare copper connector

OEM part number	KL61CVS	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00276	KL61SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL61SMO	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00270	KL61SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL61SMS	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00288	KL61SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL61SVO	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00282	KL61SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL61SVS	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00277	KL61TMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector

OEM part number	KL61TMO	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00271	KL61TMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector

OEM part number	KL61TMS	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00289	KL61TVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, tin-plated copper connector

OEM part number	KL61TVO	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00283	KL61TVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, tin-plated copper connector

OEM part number	KL61TVS	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00272	KL63CMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, bare copper connector

OEM part number	KL63CMO	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00266	KL63CMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, bare copper connector

OEM part number	KL63CMS	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00284	KL63CVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, bare copper connector

OEM part number	KL63CVO	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00278	KL63CVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, bare copper connector

OEM part number	KL63CVS	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00273	KL63SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL63SMO	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00267	KL63SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL63SMS	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00285	KL63SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL63SVO	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00279	KL63SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL63SVS	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00274	KL63TMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector

OEM part number	KL63TMO	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00268	KL63TMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector

OEM part number	KL63TMS	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00286	KL63TVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, tin-plated copper connector

OEM part number	KL63TVO	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00280	KL63TVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, tin-plated copper connector

OEM part number	KL63TVS	A	S52 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S52 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	600 A	A	S52 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00194	**KL11AMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00206	**KL11AVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00215	**KL11SCF**	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00195	**KL11SMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00207	**KL11SVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00192	**KL13AMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00204	**KL13AVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00214	**KL13SCF**	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00193	**KL13SMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00205	**KL13SVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00224	**KL21AMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00236	**KL21AVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00245	**KL21SCF**	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00225	**KL21SMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00237	**KL21SVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00222	**KL23AMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00234	**KL23AVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00244	**KL23SCF**	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00223	**KL23SMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00235	**KL23SVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00194 **KL11AMF** Cutler-Hammer sub-feed-lug-kit **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL11AMF	**A**	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	**A**	same as above
Application	sub-feed	**A**	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	**C**	S52 inference
Current rating	100 A	**A**	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	**A**	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	**A**	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00206 **KL11AVF** Cutler-Hammer sub-feed-lug-kit **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL11AVF	**A**	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	**A**	same as above
Application	sub-feed	**A**	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	**C**	S52 inference
Current rating	100 A	**A**	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	**A**	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	**A**	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00215	KL11SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SCF	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00195	KL11SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SMF	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00207	KL11SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL11SVF	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00192	KL13AMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL13AMF	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00204	KL13AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL13AVF	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00214	KL13SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SCF	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00193	KL13SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SMF	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00205	KL13SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL13SVF	A	S52 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S52 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	100 A	A	S52 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00224	KL21AMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL21AMF	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00236	KL21AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL21AVF	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00245	KL21SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SCF	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00225	KL21SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SMF	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00237	KL21SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL21SVF	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00222	KL23AMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL23AMF	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00234	KL23AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL23AVF	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00244	KL23SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SCF	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00223	KL23SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SMF	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00235	KL23SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL23SVF	A	S52 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S52 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S52 inference
Current rating	225 A	A	S52 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00290	**1C96608**	PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuits)	BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP (QUICKLAG with shunt trip n A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00291	**2C11642**	PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuits)	HQP, QPHW, QHPX, QPGF, QPHGF, QPGFEP, QPHGFEP A	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00290 **1C96608** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuits)

OEM part number	1C96608	A	S52, S53, S42 s1 p.8 Table 8; oem_spec
Alternate / superseded numbers	1C96608G01..G63 (odd item numbers)	A	S52 style_number; p.8 Table 8; oem_spec
Description	Horizontally mounted branch connector kit assembly for bolt-on QUICKLAG breakers; order drawing number + G item: 12/18/30/42/48/54/72/96 circuits = G01/G09/G17/G25/G33/G41/G49/G57 (3-ph tin Al); +2 = 3-ph silver Cu; +4 = 1-ph tin Al; +6 = 1-ph silver Cu	A	S52, S53 s1 p.8; oem_spec
Application	branch	A	S52 oem_spec
Installation location	Branch section, PRL1a/1X interior	A	same as above
Breaker compatibility	BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP (QUICKLAG with shunt trip needs one extra circuit)	A	S52, S53 p.8; oem_spec
Kit contents	Connector assembly only; order breakers separately	A	S52 p.8 note 4; oem_spec
Material	Tin-plated aluminum or silver-plated copper connectors (bare copper bus: use silver-plated groups)	A	S52 p.8 note 3; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.8; oem_spec
Cross-links	Families: PRL1A, PRL1X · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Physical difference between 12-circuit and 96-circuit groups (strap length / number of straps) not documented.*		

EDH-EAT-00291 **2C11642** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuits)

OEM part number	2C11642	A	S52, S53 s1 p.9 Table 9; oem_spec
Alternate / superseded numbers	2C11642G03, G07, G11, G15 ... G59, G63 (silver-plated copper only)	A	S52 style_number; p.9; oem_spec
Description	Plug-in QUICKLAG breaker connector assembly; only silver-plated copper groups (G03/G11/.. 3-ph; G07/G15/.. 1-ph) offered	A	S52, S53 p.9 Table 9; oem_spec
Application	branch	A	S52 oem_spec
Breaker compatibility	HQP, QPHW, QHPX, QPGF, QPHGF, QPGFEP, QPHGFEP	A	S52, S53 p.9; oem_spec
Current rating	Sum of horizontally twin-mounted breakers shall not exceed 140 A	A	S52 p.9 note 4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.9; oem_spec
Cross-links	Families: PRL1A, PRL1X · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00355	**1C96645**	PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 in high enclosures only	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00343	**1C96646**	PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (30-90 in enclosures)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00345	**1C96647**	PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 drawing)	—	Listed Feb 2009; replaced by 42C405x crimp neutral drawings
EDH-EAT-00346	**1C96648**	PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00347	**1C96649**	PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% neutral, mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00349	**1C96650**	PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs (2009 drawing)	—	Listed Feb 2009; replaced by 42C405x crimp neutral drawings
EDH-EAT-00350	**1C96651**	PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00351	**1C96652**	PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral, mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00353	**1C96653**	PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing)	—	Listed Feb 2009; replaced by 42C405x crimp neutral drawings
EDH-EAT-00354	**1C96654**	PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00356	**1C97022**	PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 in high enclosures only	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00344	**42C4050**	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00348	**42C4051**	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00352	**42C4052**	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A Burndy neutral	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00355	1C96645	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 in high enclosures only

OEM part number	1C96645	**A**	S52, S53 s1 p.14 Table 15; oem_spec
Alternate / superseded numbers	STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	**A**	S52 style_number; s1 p.14 Table 15; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main 100% neutral, mechanical, 21-27 in high enclosures only. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	**A**	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	**A**	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	**A**	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	**A**	S52 s1 p.14 Table 15; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00343	1C96646	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (30-90 in enclosures)

OEM part number	1C96646	A	S52, S53, S54 s1 p.11 Table 11; oem_spec
Alternate / superseded numbers	STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	A	S52 style_number; s1 p.11 Table 11; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, mechanical lugs (30-90 in enclosures). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	A	S52 s1 p.11 Table 11; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00345	1C96647	Cutler-Hammer	neutral-assembly	LISTED FEB 2009; REPLA

PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 drawing)

OEM part number	1C96647	A	S53 s2 p.12 Table 9; oem_spec
Alternate / superseded numbers	STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil [style_number]	A	same as above
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, crimp lugs (2009 drawing). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil	A	S53 s2 p.12 Table 9; oem_spec
Status	Listed Feb 2009; replaced by 42C405x crimp neutral drawings by Oct 2017 edition (Same table positions; wire ranges differ)	B	S53, S42, S52 inference
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00346	1C96648	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical lugs

OEM part number	1C96648	A	S52, S53 s1 p.11; oem_spec
Alternate / superseded numbers	STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	A	S52 style_number; s1 p.11; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, copper mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	A	S52 s1 p.11; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00347	1C96649	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% neutral, mechanical lugs

OEM part number	1C96649	A	S52, S53, S54 s1 pp.11-12 Tables 11-12; oem_spec
Alternate / superseded numbers	STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	A	S52 style_number; s1 pp.11-12 Tables 11-12; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main 200% neutral / 225 A main 100% neutral, mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	A	S52 s1 pp.11-12 Tables 11-12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00349	1C96650	Cutler-Hammer	neutral-assembly	LISTED FEB 2009; REPLA

PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs (2009 drawing)

OEM part number	1C96650	A	S53 s2 pp.12-13; oem_spec
Alternate / superseded numbers	STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil [style_number]	A	same as above
Description	PRL1a/2a/1X/2X neutral assembly: 100 A 200% / 225 A 100% neutral, crimp lugs (2009 drawing). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil	A	S53 s2 pp.12-13; oem_spec
Status	Listed Feb 2009; replaced by 42C405x crimp neutral drawings by Oct 2017 edition (Same table positions; wire ranges differ)	B	S53, S42, S52 inference
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00350	1C96651	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mechanical lugs

OEM part number	1C96651	A	S52, S53 s1 pp.11-12; oem_spec
Alternate / superseded numbers	STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	A	S52 style_number; s1 pp.11-12; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A 200% / 225 A 100% neutral, copper mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	A	S52 s1 pp.11-12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00351	1C96652	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral, mechanical lugs

OEM part number	1C96652	A	S52, S53, S54 s1 pp.12-13 Tables 12-14; oem_spec
Alternate / superseded numbers	225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	A	S52 style_number; s1 pp.12-13 Tables 12-14; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% / 400 A 100% / 600 A 100% neutral, mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: 225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	A	S52 s1 pp.12-13 Tables 12-14; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00353	1C96653	Cutler-Hammer	neutral-assembly	LISTED FEB 2009; REPLA

PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing)

OEM part number	1C96653	A	S53 s2 p.13 Table 10; oem_spec
Alternate / superseded numbers	STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2 [style_number]	A	same as above
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% neutral, crimp lugs (2009 drawing). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2	A	S53 s2 p.13 Table 10; oem_spec
Status	Listed Feb 2009; replaced by 42C405x crimp neutral drawings by Oct 2017 edition (Same table positions; wire ranges differ)	B	S53, S42, S52 inference
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00354	1C96654	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mechanical lugs

OEM part number	1C96654	A	S52, S53 s1 pp.12-13; oem_spec
Alternate / superseded numbers	STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	A	S52 style_number; s1 pp.12-13; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% / 400 A 100% neutral, copper mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	A	S52 s1 pp.12-13; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00356	1C97022	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 in high enclosures only

OEM part number	1C97022	A	S52, S53 s1 p.14 Table 15; oem_spec
Alternate / superseded numbers	STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	A	S52 style_number; s1 p.14 Table 15; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main 200% neutral, mechanical, 21-27 in high enclosures only. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	A	S52 s1 p.14 Table 15; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00344	42C4050	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs

OEM part number	42C4050	A	S52, S42 s1 p.11 Table 11; oem_spec
Alternate / superseded numbers	STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	A	S52 style_number; s1 p.11 Table 11; oem_spec
	1C96647 (Same table position in Feb 2009 edition; crimp lug ranges differ)	B	S53, S52 supersedes; inference
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, crimp lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	S52 s1 p.11 Table 11; oem_spec
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	A	S52 s1 p.11 Table 11; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00348	42C4051	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs

OEM part number	42C4051	A	S52, S42 s1 pp.11-12; oem_spec
Alternate / superseded numbers	STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	A	S52 style_number; s1 pp.11-12; oem_spec
	1C96650 (Same table position in Feb 2009 edition; crimp lug ranges differ)	B	S53, S52 supersedes; inference
Description	PRL1a/2a/1X/2X neutral assembly: 100 A 200% / 225 A 100% neutral, crimp lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	S52 s1 pp.11-12; oem_spec
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	A	S52 s1 pp.11-12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00352	42C4052	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A Burndy neutral

OEM part number	42C4052	A	S52, S42 s1 pp.12-13; oem_spec
Alternate / superseded numbers	STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	A	S52 style_number; s1 pp.12-13; oem_spec
	1C96653 (Same table position in Feb 2009 edition; crimp lug ranges differ)	B	S53, S52 supersedes; inference
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% / 400 A 100% neutral crimp; 600 A Burndy neutral. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	S52 s1 pp.12-13; oem_spec
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S52 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	A	S52 s1 pp.12-13; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00358	**2C11296**	Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00357	**5158C05**	Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00358	2C11296	Cutler-Hammer	ground-bar	LISTED AS STOCK RENEWA

Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)

OEM part number	2C11296	A	S52, S53, S54 s1 p.15 Table 17; p.24 Table 33; oem_spec
Alternate / superseded numbers	G01 24 in Al/Cu; G02 24 in Cu; G03 36-90 in Al/Cu; G04 36-90 in Cu	A	S52 style_number; p.15; oem_spec
Description	Isolated ground bar; PRL3a/3X catalog numbers 2C11296G02 (Al/Cu) and 2C11296G04 (Cu) (Table 17 (G02 = 24 in copper) conflicts with Table 33 (G02 = Al/Cu for PRL3a); s4 Pow-R-Kit lists isolated ground bar as 2C11296G03)	A	S52 p.24 Table 33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.15; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Resolve 2C11296 G-number conflict between Table 17 and Table 33 / Pow-R-Kit (G03).*		

EDH-EAT-00357	5158C05	Cutler-Hammer	ground-bar	LISTED AS STOCK RENEWA

Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)

OEM part number	5158C05	A	S52, S53, S54, S55 s1 p.15 Table 16; s1 p.24 Table 33; s5 pp.5-6; oem_spec
Alternate / superseded numbers	G01 24 in encl Al/Cu; G03 24 in Cu; G02 36-90 in encl Al/Cu; G04 36-90 in Cu (vintage PRL: G02 boxes >=30 in, G01 boxes <30 in)	A	S52, S55 style_number; s1 p.15; s5 p.5 Table 5; oem_spec
Description	Standard equipment ground bar; PRL3a/3X catalog numbers 5158C05G02 (Al/Cu) and 5158C05G04 (Cu only)	A	S52 p.15, p.24; oem_spec
Material	Aluminum/copper-rated or copper bar per G item	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.15; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL1/PRL2, PRL3, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00337	**PRLSEBFD**	Service entrance barrier kit for FD main breaker	FD (PRL1a/2a/3a); PDG2 (PRL1X/2X/3a table) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00338	**PRLSEBGHB**	Service entrance barrier kit for GHB main breaker	GHB A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00336	**PRLSEBJD**	Service entrance barrier kit for JD main breaker	JD A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00335	**PRLSEBLGKD**	Service entrance barrier kit for LG and KD main breaker	LG and KD (PRL1a/2a/3a); PDG3 (PRL1X/2X) A	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00337	PRLSEBFD	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for FD main breaker

OEM part number	PRLSEBFD	A	S52, S42 s1 p.16 Tables 19-20, p.25; oem_spec
Description	Service entrance barrier for FD (PRL1a/2a/3a); PDG2 (PRL1X/2X/3a table) main breaker (service entrance main breaker kit)	A	S52 s1 p.16 Tables 19-20, p.25; oem_spec
Application	main (service entrance)	A	S52 oem_spec
Breaker compatibility	FD (PRL1a/2a/3a); PDG2 (PRL1X/2X/3a table)	A	S52 s1 p.16 Tables 19-20, p.25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X · Breakers: EHD, Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00338	PRLSEBGHB	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for GHB main breaker

OEM part number	PRLSEBGHB	**A**	S52, S42 s1 p.16, p.25; oem_spec
Description	Service entrance barrier for GHB main breaker (service entrance main breaker kit)	**A**	S52 s1 p.16, p.25; oem_spec
Application	main (service entrance)	**A**	S52 oem_spec
Breaker compatibility	GHB	**A**	S52 s1 p.16, p.25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00336	PRLSEBJD	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for JD main breaker

OEM part number	PRLSEBJD	**A**	S52, S42 s1 p.16 Table 20, p.25 Table 36; oem_spec
Description	Service entrance barrier for JD main breaker (service entrance main breaker kit)	**A**	S52 s1 p.16 Table 20, p.25 Table 36; oem_spec
Application	main (service entrance)	**A**	S52 oem_spec
Breaker compatibility	JD	**A**	S52 s1 p.16 Table 20, p.25 Table 36; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A · Breakers: JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00335	PRLSEBLGKD	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for LG and KD main breaker

OEM part number	PRLSEBLGKD	**A**	S52, S42 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
Description	Service entrance barrier for LG and KD (PRL1a/2a/3a); PDG3 (PRL1X/2X) main breaker (service entrance main breaker kit)	**A**	S52 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
Application	main (service entrance)	**A**	S52 oem_spec
Breaker compatibility	LG and KD (PRL1a/2a/3a); PDG3 (PRL1X/2X)	**A**	S52 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X · Breakers: Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, KD, Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00370	**1C96619**	PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00371	**1C96620**	PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00361	**1C96638**	PRL1a/2a/1X/2X deadfront cover assembly	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00365	**4180B03**	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-2021 drawing)	—	Listed Feb 2009 and Oct 2017; not in April 2021 edition
EDH-EAT-00368	**4180B04**	PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00367	**4180B05**	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	—	Listed Feb 2009 and Oct 2017; not in April 2021 edition
EDH-EAT-00366	**4180B61**	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-2021 drawing)	—	Listed Feb 2009 and Oct 2017; not in April 2021 edition
EDH-EAT-00364	**42C7982**	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00362	**42C8072**	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00363	**42C8073**	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00370 — 1C96619 — Cutler-Hammer — deadfront — LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)

OEM part number	1C96619	**A**	S52, S53 s1 p.19 Table 24; oem_spec
Alternate / superseded numbers	12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	**A**	S52 style_number; p.19; oem_spec
Description	Deadfront cover for horizontally mounted BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP branch section; item and quantity by branch circuit count	**A**	S52, S53 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S52 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00371 — 1C96620 — Cutler-Hammer — deadfront — LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)

OEM part number	1C96620	**A**	S52, S53 s1 p.19 Table 24; oem_spec
Alternate / superseded numbers	12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	**A**	S52 style_number; p.19; oem_spec
Description	Deadfront cover for horizontally mounted GB, GHB, GHQ, GHBS branch section; item and quantity by branch circuit count	**A**	S52, S53 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S52 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00361 — 1C96638 — Cutler-Hammer — deadfront — LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X deadfront cover assembly

OEM part number	1C96638	**A**	S52, S53, S54 s1 p.17 Table 21; oem_spec
Alternate / superseded numbers	Enclosure height 24 in G01; 36 in G02; 42 in G07; 48 in G03; 60 in G04; 72 in G05; 90 in G06	**A**	S52 style_number; p.17; oem_spec
Description	Deadfront cover assembly by standard enclosure height; does not apply to PRL4 sub-chassis	**A**	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00365	4180B03	Cutler-Hammer	deadfront	LISTED FEB 2009 AND OC

PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-2021 drawing)

OEM part number	4180B03	A	S53, S42 s2 p.17 Table 17; s3 p.16 Table 20; oem_spec
Alternate / superseded numbers	H01 (top and bottom)	A	S53 style_number; p.17; oem_spec
	42C8072	C	S52, S53, S42 superseded_by; inference
Description	100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover	A	S53, S42 oem_spec
Status	Listed Feb 2009 and Oct 2017; not in April 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00368	4180B04	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover

OEM part number	4180B04	A	S52, S53 s1 p.18 Table 23; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S52 style_number; p.18; oem_spec
Description	Deadfront cover, vertical 400 A MLO/SFL/TFL or J-Frame device	A	S52, S53 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.18; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00367	4180B05	Cutler-Hammer	deadfront	LISTED FEB 2009 AND OC

PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)

OEM part number	4180B05	A	S53, S42 s2 p.17 Table 17; s3 p.16 Table 20; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S53 style_number; p.17; oem_spec
	42C7982	C	S52, S53, S42 superseded_by; inference
Description	400 A MLO/TFL or K-Frame vertical device cover	A	S53, S42 oem_spec
Status	Listed Feb 2009 and Oct 2017; not in April 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL1A, PRL2A · Breakers: KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00366	4180B61	Cutler-Hammer	deadfront	LISTED FEB 2009 AND OC

PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-2021 drawing)

OEM part number	4180B61	A	S53, S42 s2 p.17 Table 17; s3 p.16 Table 20; oem_spec
Alternate / superseded numbers	H01 (top and bottom)	A	S53 style_number; p.17; oem_spec
	42C8073	C	S52, S53, S42 superseded_by; inference
Description	225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover	A	S53, S42 oem_spec
Status	Listed Feb 2009 and Oct 2017; not in April 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00364	42C7982	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover

OEM part number	42C7982	A	S52 s1 pp.17-18 Tables 22-23; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S52 style_number; p.17-18; oem_spec
	4180B05 (4180B05 occupies the same table row in Feb 2009 and Oct 2017 editions; replaced by 42C7982 in April 2021 edition)	C	S53, S42, S52 supersedes; inference
Description	Deadfront cover for vertically mounted device: 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	A	S52 p.17-18; oem_spec
Installation location	Main/sub-feed end of deadfront	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: KD, Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00362	42C8072	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device cover

OEM part number	42C8072	A	S52 s1 pp.17-18 Tables 22-23; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S52 style_number; p.17-18; oem_spec
	4180B03 (4180B03 occupies the same table row in Feb 2009 and Oct 2017 editions; replaced by 42C8072 in April 2021 edition)	C	S53, S42, S52 supersedes; inference
Description	Deadfront cover for vertically mounted device: 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device cover	A	S52 p.17-18; oem_spec
Installation location	Main/sub-feed end of deadfront	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: EHD, Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00363	42C8073	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device cover

OEM part number	42C8073	A	S52 s1 pp.17-18 Tables 22-23; oem_spec
Alternate / superseded numbers	H01 top, H04 bottom	A	S52 style_number; p.17-18; oem_spec
	4180B61 (4180B61 occupies the same table row in Feb 2009 and Oct 2017 editions; replaced by 42C8073 in April 2021 edition)	C	S53, S42, S52 supersedes; inference
Description	Deadfront cover for vertically mounted device: 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device cover	A	S52 p.17-18; oem_spec
Installation location	Main/sub-feed end of deadfront	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: EHD, ED, Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00369	**4180B08**	PRL1a/2a/1X/2X deadfront blank covers 1-16 in	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00372	**4180B52H01**	PRL1a/2a filler cover for F, J, K frame vertical device spaces	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00373	**5155C62H01**	QUICKLAG / GB / GHB 1-pole filler (branch space filler)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00369 **4180B08** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X deadfront blank covers 1-16 in

OEM part number	4180B08	A	S52, S53 s1 pp.17-18; oem_spec
Alternate / superseded numbers	H01 = 1.00 in (25.4 mm) ... H16 = 16.00 in (406.4 mm), 1 in increments	A	S52 style_number; p.17 Table 22; oem_spec
Description	Blank deadfront covers in 1 in height increments, H01-H16	A	S52, S53 oem_spec
Dimensions	Height 1.00-16.00 in by H number; width not stated	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00372 **4180B52H01** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

PRL1a/2a filler cover for F, J, K frame vertical device spaces

OEM part number	4180B52H01	A	S52, S53, S42 s1 p.19 Table 25; oem_spec
Description	Filler cover, F/J/K frame; required in addition to deadfront cover whenever MLO, SFL or TFL are specified	A	S52 p.19 note a; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: EHD, JD, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00373 **5155C62H01** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

QUICKLAG / GB / GHB 1-pole filler (branch space filler)

OEM part number	5155C62H01	A	S52, S53, S42, S54 s1 p.19 Table 25; p.30 Tables 42-43; oem_spec
Description	Filler cover for QUICKLAG, GB, GHB, GHBS branch spaces (1, 2 or 3 poles per PRL3 tables); required in addition to deadfront cover whenever a branch provision is specified. Pow-R-Kit lists it as 'BAB/GHB 1-Pole Fillers'	A	S52, S54 s1 p.19, p.30; s4 p.12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X, PRL3A, PRL3X · Breakers: BAB, BAB, GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00451	**1A85194G01**	EZ Trim lock keyed WEM-2	—	Listed in renewal parts guide(s) s4
EDH-EAT-00450	**5155C81G03**	EZ Trim lock, 24-48 in	—	Listed in renewal parts guide(s) s1, s3
EDH-EAT-00448	**K80133**	Trim lock for right-handed door	—	Listed in renewal parts guide(s) s1, s2
EDH-EAT-00449	**K80429**	T-handle lock	—	Listed in renewal parts guide(s) s1, s2, s4, s5

EDH-EAT-00451	1A85194G01	Eaton	trim	LISTED IN RENEWAL PART

EZ Trim lock keyed WEM-2

OEM part number	1A85194G01	A	S54 oem_spec
Description	EZ Trim lock keyed WEM-2 (standard); G03 GE75, G05 Corbin WEM-1, G09 Corbin TEU 1, G10 CAT 60	A	same as above
Status	Listed in renewal parts guide(s) s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00450	5155C81G03	Cutler-Hammer	trim	LISTED IN RENEWAL PART

EZ Trim lock, 24-48 in

OEM part number	5155C81G03	A	S52, S42 oem_spec
Description	EZ Trim lock, 24-48 in (54-60 in: lock 5155C81G03 + latch 5155C81G05; 72-90 in: 5155C81G04 + 5155C81G06)	A	same as above
Status	Listed in renewal parts guide(s) s1, s3	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00448	K80133	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Trim lock for right-handed door

OEM part number	K80133	A	S52, S53 oem_spec
Alternate / superseded numbers	8450C62H39 (Right-hand door lock listed as K80133 (2009/2021) and 8450C62H39 (2011/2013))	C	S52, S54, S55 equivalent; inference
Description	Trim lock for right-handed door (hinged on right)	A	S52, S53 oem_spec
Status	Listed in renewal parts guide(s) s1, s2	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00449	K80429	Cutler-Hammer	trim	LISTED IN RENEWAL PART

T-handle lock

OEM part number	K80429	A	S52, S53, S54, S55 oem_spec
Alternate / superseded numbers	0080429	B	S54, S55 alias; oem_spec
Description	T-handle lock (trims over 48 in; NEMA 12/3R trims); listed as 0080429 in 2011/2013 docs	A	S52, S53, S54, S55 oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S55 p.19; oem_spec
Status	Listed in renewal parts guide(s) s1, s2, s4, s5	A	S52, S53, S54, S55 oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL4, CDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00452	**2C11641G02**	Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X	—	Listed in s1, s2, s4
EDH-EAT-00341	**4180B62**	PRL1a/2a/1X/2X service entrance bonding jumper kit	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00452	2C11641G02	Cutler-Hammer	hardware-kit	LISTED IN S1, S2, S4

Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X

OEM part number	2C11641G02	A	S52, S53, S54 oem_spec
Description	Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X (6 per bag)	A	same as above
Status	Listed in s1, s2, s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00341	4180B62	Cutler-Hammer	hardware-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X service entrance bonding jumper kit

OEM part number	4180B62	A	S52, S53, S54 s1 p.15 Table 18; oem_spec
Alternate / superseded numbers	Mechanical main lugs/main breakers: 100-225 A G01 (tin Al) G02 (bare Cu) G03 (silver Cu) G04 (tin Cu); 400-600 A G05-G08. Crimp main lugs: 100-225 A G09-G12; 400-600 A G13-G16. Copper main lugs: 100-225 A G18-G20; 400-600 A G22-G24	A	S52 style_number; p.15 Table 18; oem_spec
Description	Service entrance bonding jumper kit, neutral-to-ground; order 4180B62 + G item by main ampere rating, lug type and connector plating	A	S52, S53 s1 p.15; oem_spec
Application	accessory (service entrance)	A	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.15; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*2009 edition lists 400 A row as '400'; 2021 lists '400-600' - same G numbers.*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00455	**42C1129H02**	Chassis mounting hardware, PRL1a/2a/3a	—	Listed in s4
EDH-EAT-00453	**5157C83G06**	Trim screws	—	Listed in s1, s2, s4
EDH-EAT-00454	**7499A48G04**	Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X	—	Listed in s1, s2, s4

EDH-EAT-00455	42C1129H02	Cutler-Hammer	fastener	LISTED IN S4

Chassis mounting hardware, PRL1a/2a/3a

OEM part number	42C1129H02	A	S54 oem_spec
Description	Chassis mounting hardware, PRL1a/2a/3a (Pow-R-Kit)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00453	5157C83G06	Cutler-Hammer	fastener	LISTED IN S1, S2, S4

Trim screws

OEM part number	5157C83G06	A	S52, S53, S54 oem_spec
Description	Trim screws (and captive nuts) for PRL1a/2a/3a/1X/2X/3X and PRL4B standard trim (10 per bag)	A	same as above
Status	Listed in s1, s2, s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00454	7499A48G04	Cutler-Hammer	fastener	LISTED IN S1, S2, S4

Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X

OEM part number	7499A48G04	A	S52, S53, S54 oem_spec
Description	Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X	A	same as above
Status	Listed in s1, s2, s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00460	**1256C42G01**	BAB 2- and 3-pole lock-off	—	Listed in s4
EDH-EAT-00459	**1256C42G02**	BAB 1-pole lock-off	—	Listed in s4

EDH-EAT-00460	1256C42G01	Cutler-Hammer	handle-lock	LISTED IN S4

BAB 2- and 3-pole lock-off

OEM part number	1256C42G01	A	S54 oem_spec
Description	BAB 2- and 3-pole lock-off (non-padlockable)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL1A, PRL3A · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00459	1256C42G02	Cutler-Hammer	handle-lock	LISTED IN S4

BAB 1-pole lock-off

OEM part number	1256C42G02	A	S54 oem_spec
Description	BAB 1-pole lock-off (non-padlockable)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL1A, PRL3A · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.10 PRL1X — Pow-R-Line Xpert 1X

FAM-EAT-020 · panelboard · aka PRL1x, Pow-R-Line 1X, Pow-R-Line Xpert · markings: Eaton

Pow-R-Line Xpert successor to PRL1a. Shares PRL1a horizontal branch assemblies (1C96608/2C11642/1C96609), lug kits (KL*), neutral/ground assemblies and deadfronts, but vertical main/sub-feed connector kits are for Power Defense frames (KB..2T/B, KB..34, KB..36). Each branch connector rated up to 140 A total by breaker rating.

Attribute	Value	Cl.	Sources
Status	Current	A	S56 oem_spec
Era of manufacture	Introduced 2020 (time line: May 2020)	A	S52 p.2; oem_spec
Voltage rating	240 Vac maximum	A	S56 p.V2-T3-11; oem_spec
Main ampacity	MLO 600 A max; main device 600 A max; sub-feed breaker 600 A	A	same as above
Branch breakers accepted	Bolt-on or plug-on QUICKLAG (BAB, QBHW, HQP, QPHW, GF/AF/EP variants) 15-100 A; mains/sub-feeds PDG2 (Power Defense 225 A frame), PDG3, GHB	A	S52, S56 s1 pp.4,16; s6 p.V2-T3-33; oem_spec

Breaker families associated: BAB, Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3)

Key documents: S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S56 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control

Also fits this family (entry printed elsewhere): 5155C81G01, KL13AMS, KL13SMS, KL11AMS, KL11SMS, KL13AMF, KL13SMF, KL11AMF, KL11SMF, KL13AMO, KL13SMO, KL11AMO, KL11SMO, KL13AVS, KL13SVS, KL11AVS, KL11SVS, KL13AVF, KL13SVF, KL11AVF, KL11SVF, KL13AVO, KL13SVO, KL11AVO, KL11SVO, KL13SCS, KL11SCS, KL13SCF, KL11SCF, KL13SCO, KL11SCO, KL23AMS, KL23SMS, KL21AMS, KL21SMS, KL23AMF, KL23SMF, KL21AMF, KL21SMF, KL23AMO, KL23SMO, KL21AMO, KL21SMO, KL23AVS, KL23SVS, KL21AVS, KL21SVS, KL23AVF, KL23SVF, KL21AVF, KL21SVF, KL23AVO, KL23SVO, KL21AVO, KL21SVO, KL23SCS, KL21SCS, KL23SCF, KL21SCF, KL23SCO, KL21SCO, KL43AMS, KL43SMS, KL41AMS, KL41SMS, KL43AMO, KL43SMO, KL41AMO, KL41SMO, KL43AVS, KL43SVS, KL41AVS, KL41SVS, KL43AVO, KL43SVO, KL41AVO, KL41SVO, KL43SCO, KL41SCO, KL63CMS, KL63SMS, KL63TMS, KL61CMS, KL61SMS, KL61TMS, KL63CMO, KL63SMO, KL63TMO, KL61CMO, KL61SMO, KL61TMO, KL63CVS, KL63SVS, KL63TVS, KL61CVS, KL61SVS, KL61TVS, KL63CVO, KL63SVO, KL63TVO, KL61CVO, KL61SVO, KL61TVO, 1C96608, 2C11642, PRLSEBLGKD, PRLSEBFD, PRLSEBGHB, 4180B62, 1C96646, 42C4050, 1C96647, 1C96648, 1C96649, 42C4051, 1C96650, 1C96651, 1C96652, 42C4052, 1C96653, 1C96654, 1C96645, 1C97022, 5158C05, 2C11296, 1C96638, 42C8072, 42C8073, 42C7982, 4180B08, 1C96619, 1C96620, 5155C62H01, 5155C81G03, 2C11641G02, 5157C83G06, 7499A48G04

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00165	**KB11A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00164	**KB11A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, tin-plated aluminum connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00167	**KB11S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, silver-plated copper connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00166	**KB11S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, silver-plated copper connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00161	**KB13A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00160	**KB13A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, tin-plated aluminum connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00163	**KB13S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, silver-plated copper connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00162	**KB13S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, silver-plated copper connector	PDG2 (100 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00173	**KB21A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00172	**KB21A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, tin-plated aluminum connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00175	**KB21S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00174	**KB21S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00169	**KB23A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00168	**KB23A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, tin-plated aluminum connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00171	**KB23S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00170	**KB23S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00181	**KB41A14B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00180	**KB41A14T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00183	**KB41S14B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00182	**KB41S14T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00177	**KB43A34B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00176	**KB43A34T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00179	**KB43S34B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00178	**KB43S34T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00187	**KB61S16B**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, bottom fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00186	**KB61S16T**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, top fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00185	**KB63S36B**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, bottom fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00184	**KB63S36T**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, top fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00165 — KB11A2B — Cutler-Hammer — main-breaker-kit — LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB11A2B	**A**	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, bottom fed	**A**	same as above
Application	main or sub-feed breaker (vertically mounted)	**A**	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	**A**	S52 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	**A**	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	**A**	S52 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	**A**	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00164 — KB11A2T — Cutler-Hammer — main-breaker-kit — LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB11A2T	**A**	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, top fed	**A**	same as above
Application	main or sub-feed breaker (vertically mounted)	**A**	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	**A**	S52 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	**A**	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	**A**	S52 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	**A**	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00167	KB11S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB11S2B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00166	KB11S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB11S2T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00161	KB13A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB13A2B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00160	KB13A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB13A2T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00163	KB13S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB13S2B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00162	KB13S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB13S2T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00173	KB21A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB21A2B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00172	KB21A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB21A2T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00175	KB21S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB21S2B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00174	KB21S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB21S2T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00169	KB23A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB23A2B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00168	KB23A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB23A2T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00171	KB23S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB23S2B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00170	KB23S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB23S2T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00181	KB41A14B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB41A14B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00180	KB41A14T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB41A14T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00183	KB41S14B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB41S14B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00182	KB41S14T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, silver-plated copper connector

OEM part number	KB41S14T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00177	KB43A34B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB43A34B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00176	KB43A34T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB43A34T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00179	KB43S34B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB43S34B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00178	KB43S34T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, silver-plated copper connector

OEM part number	KB43S34T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00187	KB61S16B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB61S16B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00186	KB61S16T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, top fed, silver-plated copper connector

OEM part number	KB61S16T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00185	KB63S36B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB63S36B	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00184	KB63S36T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, top fed, silver-plated copper connector

OEM part number	KB63S36T	A	S52 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S52 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S52 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S52 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S52 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S52 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

3.11 PRL2A — Pow-R-Line 2a

FAM-EAT-017 · panelboard · aka PRL2a, PRL-2A, Pow-R-Line 2a · markings: Cutler-Hammer, Eaton

480Y/277 Vac lighting panelboard sharing the PRL1a chassis architecture (20 in box, gutter neutral, KB vertical kits, KL lug kits, 1C96638 deadfront). Branch breakers are GHB-family bolt-ons on 1C96609 horizontal connector assemblies. GHB main breaker is horizontally mounted; all other mains vertical. Fully rated 14 kA at 480Y/277, series rated 22-150 kA.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts listed April 2021; superseded by PRL2X	A	S52 p.2; oem_spec
Era of manufacture	Introduced October 1996	A	S52, S53 p.2 Table 1; oem_spec
Successor	PRL2X	A	S52, S56 oem_spec
Voltage rating	240 Vac or 480Y/277 Vac maximum; 250 Vdc. Not for 480 V delta (use PRL3a); 3-phase 3-wire only when derived from 480Y/277 4-wire service	A	S57 p.22.2-1; oem_spec
Main ampacity	Main lugs 100, 225, 400 A (selection guide shows 600 A MLO/main at 240/480Y; 400 A dc); main breakers 100-600 A (Text on p.22.2-1 says MLO ampere ratings 100, 225 and 400 but 'Main Lugs 100-600 A' in ratings box)	A	S57 p.22.0-5, 22.2-1; oem_spec
Branch breakers accepted	Bolt-on GHB (480Y/277 only), GHQ, HGHB, GHQRSP, GHBGFEP 15-100 A; mains GHB (horizontal), EHD, FDB, FD, HFD, FDC, ED, EDH, EDC, JD/HJD/JDC, DK/KD/HKD/KDC, LHH, LG-family	A	S57 p.22.2-1 Tables 22.2-1, 22.2-2; oem_spec
box_width	20.00 in (508.0 mm)	A	S52 p.2; oem_spec

Breaker families associated: ED, EHD, GB, JD, KD, Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH

Key documents: S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S53 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S56 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S57 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

Also fits this family (entry printed elsewhere): K80522, 5155C81G01, KB13AFT, KB13AFB, KB13SFT, KB13SFB, KB11AFT, KB11AFB, KB11SFT, KB11SFB, KB23AFT, KB23AFB, KB23SFT, KB23SFB, KB21AFT, KB21AFB, KB21SFT, KB21SFB, KB43AJT, KB43AJB, KB43SJT, KB43SJB, KB41AJT, KB41AJB, KB41SJT, KB41SJB, KB43AKT, KB43AKB, KB43SKT, KB43SKB, KB41AKT, KB41AKB, KB41SKT, KB41SKB, KL13AMS, KL13SMS, KL11AMS, KL11SMS, KL13AMF, KL13SMF, KL11AMF, KL11SMF, KL13AMO, KL13SMO, KL11AMO, KL11SMO, KL13AVS, KL13SVS, KL11AVS, KL11SVS, KL13AVF, KL13SVF, KL11AVF, KL11SVF, KL13AVO, KL13SVO, KL11AVO, KL11SVO, KL13SCS, KL11SCS, KL13SCF, KL11SCF, KL13SCO, KL11SCO, KL23AMS, KL23SMS, KL21AMS, KL21SMS, KL23AMF, KL23SMF, KL21AMF, KL21SMF, KL23AMO, KL23SMO, KL21AMO, KL21SMO, KL23AVS, KL23SVS, KL21AVS, KL21SVS, KL23AVF, KL23SVF, KL21AVF, KL21SVF, KL23AVO, KL23SVO, KL21AVO, KL21SVO, KL23SCS, KL21SCS, KL23SCF, KL21SCF, KL23SCO, KL21SCO, KL43AMS, KL43SMS, KL41AMS, KL41SMS, KL43AMO, KL43SMO, KL41AMO, KL41SMO, KL43AVS, KL43SVS, KL41AVS, KL41SVS, KL43AVO, KL43SVO, KL41AVO, KL41SVO, KL43SCO, KL41SCO, KL63CMS, KL63SMS, KL63TMS, KL61CMS, KL61SMS, KL61TMS, KL63CMO, KL63SMO, KL63TMO, KL61CMO, KL61SMO, KL61TMO, KL63CVS, KL63SVS, KL63TVS, KL61CVS, KL61SVS, KL61TVS, KL63CVO, KL63SVO, KL63TVO, KL61CVO, KL61SVO, KL61TVO, PRLSEBLGKD, PRLSEBJD, PRLSEBFD, PRLSEBGHB, 4180B62, 1C96646, 42C4050, 1C96647, 1C96648, 1C96649, 42C4051, 1C96650, 1C96651, 1C96652, 42C4052, 1C96653, 1C96654, 1C96645, 1C97022, 5158C05, 2C11296, 1C96638, 42C8072, 42C8073, 42C7982, 4180B03, 4180B61, 4180B05, 4180B04, 4180B08, 1C96619, 1C96620, 4180B52H01, 5155C62H01, K80133, K80429, 5155C81G03, 1A85194G01, 2C11641G02, 5157C83G06, 7499A48G04, 42C1129H02

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00292	**1C96609**	PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)	GB, GHB, GHQ, GHBS A	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00292	1C96609	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)

OEM part number	1C96609	A	S52, S53 s1 p.10 Table 10; oem_spec
Alternate / superseded numbers	1C96609G01..G63 (same G scheme as 1C96608)	A	S52 style_number; p.10; oem_spec
Description	GB/GHB/GHQ/GHBS breaker connector assembly; 12/18/30/42/48/54/72/96 circuits = G01/G09/G17/G25/G33/G41/G49/G57 (3-ph tin Al); +2 = 3-ph silver Cu; +4 = 1-ph tin Al; +6 = 1-ph silver Cu	A	S52, S53 p.10; oem_spec
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS	A	S52, S53 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.10; oem_spec
Cross-links	Families: PRL2A, PRL2X · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*s1 (2021) places table under 'PRL1X, PRL1a horizontally mounted' heading while s2 (2009) titles it 'PRL2a Horizontally Mounted' - confirm PRL2a/2X use.*		

3.12 PRL2X — Pow-R-Line Xpert 2X

FAM-EAT-021 · panelboard · aka PRL2x, Pow-R-Line 2X · markings: Eaton

Pow-R-Line Xpert successor to PRL2a; parts tables shared with PRL1X/PRL1a/PRL2a in RP01400001E.

Attribute	Value	Cl.	Sources
Status	Current	A	S56 oem_spec
Era of manufacture	Introduced 2020	A	S52 p.2; oem_spec
Voltage rating	240 or 480Y/277 Vac; 125/250 Vdc	A	S56 p.V2-T3-2; oem_spec
Main ampacity	MLO 600 A; main breaker 600 A	A	S56 p.V2-T3-11; oem_spec
Branch breakers accepted	Bolt-on GHB-family 15-100 A; mains PDG2/PDG3/GHB	A	S52, S56 oem_spec

Breaker families associated: GB, Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3)

Key documents: S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S56 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control

Also fits this family (entry printed elsewhere): 5155C81G01, KB13A2T, KB13A2B, KB13S2T, KB13S2B, KB11A2T, KB11A2B, KB11S2T, KB11S2B, KB23A2T, KB23A2B, KB23S2T, KB23S2B, KB21A2T, KB21A2B, KB21S2T, KB21S2B, KB43A34T, KB43A34B, KB43S34T, KB43S34B, KB41A14T, KB41A14B, KB41S14T, KB41S14B, KB63S36T, KB63S36B, KB61S16T, KB61S16B, KL13AMS, KL13SMS, KL11AMS, KL11SMS, KL13AMF, KL13SMF, KL11AMF, KL11SMF, KL13AMO, KL13SMO, KL11AMO, KL11SMO, KL13AVS, KL13SVS, KL11AVS, KL11SVS, KL13AVF, KL13SVF, KL11AVF, KL11SVF, KL13AVO, KL13SVO, KL11AVO, KL11SVO, KL13SCS, KL11SCS, KL13SCF, KL11SCF, KL13SCO, KL11SCO, KL23AMS, KL23SMS, KL21AMS, KL21SMS, KL23AMF, KL23SMF, KL21AMF, KL21SMF, KL23AMO, KL23SMO, KL21AMO, KL21SMO, KL23AVS, KL23SVS, KL21AVS, KL21SVS, KL23AVF, KL23SVF, KL21AVF, KL21SVF, KL23AVO, KL23SVO, KL21AVO, KL21SVO, KL23SCS, KL21SCS, KL23SCF, KL21SCF, KL23SCO, KL21SCO, KL43AMS, KL43SMS, KL41AMS, KL41SMS, KL43AMO, KL43SMO, KL41AMO, KL41SMO, KL43AVS, KL43SVS, KL41AVS, KL41SVS, KL43AVO, KL43SVO, KL41AVO, KL41SVO, KL43SCO, KL41SCO, KL63CMS, KL63SMS, KL63TMS, KL61CMS, KL61SMS, KL61TMS, KL63CMO, KL63SMO, KL63TMO, KL61CMO, KL61SMO, KL61TMO, KL63CVS, KL63SVS, KL63TVS, KL61CVS, KL61SVS, KL61TVS, KL63CVO, KL63SVO, KL63TVO, KL61CVO, KL61SVO, KL61TVO, 1C96609, PRLSEBLGKD, PRLSEBFD, PRLSEBGHB, 4180B62, 1C96646, 42C4050, 1C96647, 1C96648, 1C96649, 42C4051, 1C96650, 1C96651, 1C96652, 42C4052, 1C96653, 1C96654, 1C96645, 1C97022, 5158C05, 2C11296, 1C96638, 42C8072, 42C8073, 42C7982, 4180B08, 1C96619, 1C96620, 5155C62H01, 5155C81G03, 2C11641G02, 5157C83G06, 7499A48G04

3.13 PRL3 — Westinghouse Pow-R-Line 3 panelboard (vintage)

FAM-EAT-010 · panelboard · aka PRL3, PRL3-LX, Pow-R-Line 3 · markings: Westinghouse

Vintage Westinghouse power panelboard with lighting subchassis and vertical-bus branch area, 20 in wide. KPRL3FD/KPRL3ED/KPRL3CA connector kits; the PRL3 kits also fit WEB, WCA, WEHB, WFB and HWFB panelboards.

Westinghouse distribution panelboard, 20 in box, main-gutter neutral, trims LTT20xxS/F. Eaton notes the PRL3 connector kits also fit Westinghouse panelboards WEB, WCA, WEHB, WFB and HWFB.

Attribute	Value	Cl.	Sources
Status	discontinued; replaced by PRL3a	A	S38 p. V12-T4-8; oem_spec
	Obsolete; limited renewal parts	A	S55 oem_spec
Era of manufacture	Pre-1994 Westinghouse	C	S52, S55 inference

Attribute	Value	Cl.	Sources
Successor	PRL3a	C	S55 inference
Voltage rating	240/480/600 V class (F-frame kits rated 240/480/600 V; ED kit 240 V max)	A	S55 p.7; oem_spec
Main ampacity	600 A maximum (400 A max bus rating for subchassis)	A	S38 p. V12-T4-16; oem_spec
Branch breakers accepted	BAB/QBH subchassis, GB/GHB, EHD, FDB, FD, HFD, FDC, ED, CA/CAH/HCA; mains up to JD, KD, LC/LA, LCL, LA-P	A	S38 pp. V12-T4-8, V12-T4-16; oem_spec
	EHD/FDB/FD/HFD/FDC twin-mounted (KPRL3FD), ED/EDH/EDC (KPRL3ED), CA/CAH/HCA (KPRL3CA); BAB space on subchassis	A	S55 p.7; oem_spec
cross_fit	PRL3 connector kits fit WEB, WCA, WEHB, WFB, HWFB panelboards	A	S55 p.7 note; oem_spec

Breaker families associated: BAB, CA, ED, EHD, FD, GB
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S39 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD; S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S55 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P
Also fits this family (entry printed elsewhere): 5158C05G02, 5158C05G01, K80522, 8450C62H39, 0080429, 114C247G01, 3457B16G01, 5155C81G01, 414A380G01, 8712C73H01, 5158C05, 7494A11G02

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00054	**KPRL3CA**	PRL3 replacement connector kit for CA, CAH, HCA	CA, CAH, HCA A	Listed in RP01400002E (Feb 2013)
EDH-EAT-00053	**KPRL3ED**	PRL3 replacement connector kit for ED, EDH, EDC (240 V max)	ED, EDH, EDC (240 V max) A	Listed in RP01400002E (Feb 2013)
EDH-EAT-00052	**KPRL3FD**	PRL3 replacement connector kit for EHD, FDB, FD, HFD, FDC (240/480/600 V)	EHD, FDB, FD, HFD, FDC (240/480/600 V) A	Listed in RP01400002E (Feb 2013)

EDH-EAT-00054 **KPRL3CA** Cutler-Hammer branch-connector-kit **LISTED IN RP01400002E**

PRL3 replacement connector kit for CA, CAH, HCA

OEM part number	KPRL3CA	A	S39, S55 p. 7 Tables 9-11; oem_spec
Description	A, B and C phase connectors, hardware, cover and instructions to mount one two- or three-pole CA-frame breaker	A	S39 p. 7; oem_spec
	Replacement connectors for CA, CAH, HCA; one 2- or 3-pole breaker	A	S55 p.7; oem_spec
Application	branch	A	S39 p. 7; oem_spec
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S39 p. 7 note; oem_spec
Breaker compatibility	CA, CAH, HCA	A	S39 p. 7; oem_spec
	CA, CAH, HCA; one 2- or 3-pole breaker. PRL3 connector kits also fit Westinghouse WEB, WCA, WEHB, WFB and HWFB panelboards.	A	S55 p.7; oem_spec
Kit contents	A, B, C phase connectors, hardware, cover, instructions	A	same as above
Status	Listed in RP01400002E (Feb 2013)	A	S55 oem_spec
Cross-links	Families: PRL3, WEB · Breakers: CA		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00053	KPRL3ED	Cutler-Hammer	branch-connector-kit	LISTED IN RP01400002E

PRL3 replacement connector kit for ED, EDH, EDC (240 V max)

OEM part number	KPRL3ED	A	S39, S55 p. 7 Tables 9-11; oem_spec
Description	A, B and C phase connectors, hardware, cover and instructions to mount one three-pole breaker (single-mount only)	A	S39 p. 7; oem_spec
	Replacement connectors for ED, EDH, EDC (240 V max); one 3-pole breaker	A	S55 p.7; oem_spec
Application	branch	A	S39 p. 7; oem_spec
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S39 p. 7 note; oem_spec
Breaker compatibility	ED, EDH, EDC (240 V max)	A	S39 p. 7; oem_spec
	ED, EDH, EDC (240 V max); one 3-pole breaker. PRL3 connector kits also fit Westinghouse WEB, WCA, WEHB, WFB and HWFB panelboards.	A	S55 p.7; oem_spec
Kit contents	A, B, C phase connectors, hardware, cover, instructions	A	same as above
Status	Listed in RP01400002E (Feb 2013)	A	S55 oem_spec
Cross-links	Families: PRL3, WEB · Breakers: ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00052	KPRL3FD	Cutler-Hammer	branch-connector-kit	LISTED IN RP01400002E

PRL3 replacement connector kit for EHD, FDB, FD, HFD, FDC (240/480/600 V)

OEM part number	KPRL3FD	A	S39, S55 p. 7 Tables 9-11; oem_spec
Description	A, B and C phase connectors, hardware and instructions to twin-mount two three-pole breakers; max 150 A per breaker and 200 A per connector (50-150 A)	A	S39 p. 7; oem_spec
	Replacement connectors for EHD, FDB, FD, HFD, FDC (240/480/600 V); twin-mount two 3-pole breakers, max 150 A per breaker, max 200 A per connector (50-150 A)	A	S55 p.7; oem_spec
Application	branch	A	S39 p. 7; oem_spec
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S39 p. 7 note; oem_spec
Breaker compatibility	EHD, FDB, FD, HFD, FDC (240/480/600 V)	A	S39 p. 7; oem_spec
	EHD, FDB, FD, HFD, FDC (240/480/600 V); twin-mount two 3-pole breakers, max 150 A per breaker, max 200 A per connector (50-150 A). PRL3 connector kits also fit Westinghouse WEB, WCA, WEHB, WFB and HWFB panelboards.	A	S55 p.7; oem_spec
Kit contents	A, B, C phase connectors, hardware, instructions	A	same as above
Status	Listed in RP01400002E (Feb 2013)	A	S55 oem_spec
Cross-links	Families: PRL3, WEB · Breakers: EHD, FD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.14 PRL3A — Pow-R-Line 3a

FAM-EAT-018 · panelboard · aka PRL3a, PRL-3A, Pow-R-Line 3a · markings: Cutler-Hammer, Eaton

Power distribution panelboard on a 20 in wide box with the neutral in the main (top/bottom) gutter. Chassis height measured in X units (1X = 1.38 in); deadfront is a rail-and-end-cover frame (6559C59) with individual device covers. Branch devices are horizontally mounted on bus-stab connector kits that ship with their own device deadfront cover. Max 200 A on any one connector.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts listed April 2021; superseded by PRL3X. Deadfront/filler hardware changed for panels built after April 2019 (distributor wording)	B	S52, S58, S59 oem_spec
Era of manufacture	Introduced March 1994	A	S52, S53 p.2 Table 1; oem_spec
Successor	PRL3X	A	S52, S56 oem_spec
Voltage rating	240, 480 or 600 Vac maximum; 250 Vdc	A	S57 p.22.0-5; 22.3-1; oem_spec

Attribute	Value	Cl.	Sources
Main ampacity	Main lugs 100, 250, 400, 600, 800 A; main breakers 100-600 A	A	S57 p.22.3-1; oem_spec
Branch breakers accepted	Branch 15-225 A bolt-on: BAB/QBHW family and GHB family (on KPRL3ABA/KPRL3AGB 6-24 circuit kits), EHD/FDB/FD/HFD/FDC twin-mounted to 150 A (KPRL3AFD*), FD/HFD/FDC/ED/EDH/EDC single-mounted 175-225 A (KPRL3AED*), CA/CAH/HCA; vertical mains/sub-feeds J, K, L, FB-P, LA-P, FCL, LCL, PT363/PT364 bolt switches	A	S52, S57 s1 pp.22-29; s7 p.22.3-2; oem_spec
x_unit	1X = 1.38 in (35.1 mm); 1X blank cover fills 1 3/8 in, 13 in wide	A	S54 p.7 Table 12; oem_spec
Identification features	Neutral located in main gutter (end), not side gutter (Figure 1)	A	S52 p.2 Figure 1; oem_spec

Breaker families associated: BAB, CA, Current-limiting FCL / LCL (and FDB+LFB), ED, EHD, GB, JD, KD, LC, Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, Tri-Pac

Key documents: S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S53 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S54 RP01414001E Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E; S56 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S57 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/; S58 Rexel USA listing: Filler Plate, Panelboard, PRL3A, for Panelboards Built After April 2019; S59 Rexel USA listing: Panel Board, PRL3A, Cover Filler Plate, 1P for F-Frame Breakers (4178B0

Also fits this family (entry printed elsewhere): K80522, 5155C81G01, PRLSEBLGKD, PRLSEBJD, PRLSEBFD, PRLSEBGHB, 5158C05, 2C11296, 5155C62H01, K80133, K80429, 5155C81G03, 1A85194G01, 2C11641G02, 5157C83G06, 7499A48G04, 42C1129H02, 1256C42G02, 1256C42G01

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00309	**KPRL3ABA06**	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00310	**KPRL3ABA06-1**	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00311	**KPRL3ABA12**	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00312	**KPRL3ABA12-1**	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00313	**KPRL3ABA18**	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00314	**KPRL3ABA18-1**	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00315	**KPRL3ABA24**	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00316	**KPRL3ABA24-1**	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00334	**KPRL3AED2**	PRL3a horizontal F-frame breaker connector kit (FD...)	FD, HFD, FDC, ED, EDH, EDC 2-pole single mount 175-225 A. Frame device A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00333	**KPRL3AED3**	PRL3a horizontal F-frame breaker connector kit (FD...)	FD, HFD, FDC, ED, EDH, EDC 3-pole single mount 175-225 A, (1) 225 A ma A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00332	**KPRL3AFD1**	PRL3a horizontal F-frame breaker connector kit (EHD...)	EHD, FD, FDB, HFD, FDC 1-pole twin mount, 150 A max. Frame devices abo A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00331	**KPRL3AFD2**	PRL3a horizontal F-frame breaker connector kit (EHD...)	EHD, FD, FDB, HFD, FDC 2-pole twin mount, 150 A max. Frame devices abo A	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00330	**KPRL3AFD3**	PRL3a horizontal F-frame breaker connector kit (EHD...)	EHD, FD, FDB, HFD, FDC 3-pole twin mount, (2) 150 A devices max. Frame **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00317	**KPRL3AGB06**	PRL3a horizontal 6-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00318	**KPRL3AGB06-1**	PRL3a horizontal 6-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00319	**KPRL3AGB12**	PRL3a horizontal 12-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00320	**KPRL3AGB12-1**	PRL3a horizontal 12-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00321	**KPRL3AGB18**	PRL3a horizontal 18-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00322	**KPRL3AGB18-1**	PRL3a horizontal 18-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00323	**KPRL3AGB24**	PRL3a horizontal 24-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00324	**KPRL3AGB24-1**	PRL3a horizontal 24-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00309	KPRL3ABA06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA06	**A**	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	**A**	same as above
Application	branch	**A**	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00310	KPRL3ABA06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA06-1	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00311	KPRL3ABA12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA12	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00312	KPRL3ABA12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA12-1	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00313	KPRL3ABA18	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA18	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00314	KPRL3ABA18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA18-1	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00315	KPRL3ABA24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA24	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00316	KPRL3ABA24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA24-1	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00334	KPRL3AED2	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (FD...)

OEM part number	KPRL3AED2	A	S52, S53, S54 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: FD, HFD, FDC, ED, EDH, EDC 2-pole single mount 175-225 A; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S57 p.22.3-1; inference
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC 2-pole single mount 175-225 A. Frame devices above 150 A must be single mounted; no twin mounting.	A	S52, S53, S54 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S52 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: ED, EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00333	KPRL3AED3	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (FD...)

OEM part number	KPRL3AED3	A	S52, S53, S54 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: FD, HFD, FDC, ED, EDH, EDC 3-pole single mount 175-225 A, (1) 225 A max; phases A/B/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S57 p.22.3-1; inference
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC 3-pole single mount 175-225 A, (1) 225 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S52, S53, S54 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S52 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: ED, EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00332	KPRL3AFD1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (EHD...)

OEM part number	KPRL3AFD1	A	S52, S53, S54 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: EHD, FD, FDB, HFD, FDC 1-pole twin mount, 150 A max; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S57 p.22.3-1; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 1-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S52, S53, S54 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S52 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00331	KPRL3AFD2	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (EHD...)

OEM part number	KPRL3AFD2	A	S52, S53, S54 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: EHD, FD, FDB, HFD, FDC 2-pole twin mount, 150 A max; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S57 p.22.3-1; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 2-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S52, S53, S54 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S52 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00330	KPRL3AFD3	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (EHD...)

OEM part number	KPRL3AFD3	A	S52, S53, S54 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: EHD, FD, FDB, HFD, FDC 3-pole twin mount, (2) 150 A devices max; phases A/B/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S57 p.22.3-1; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 3-pole twin mount, (2) 150 A devices max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S52, S53, S54 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S52 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00317	KPRL3AGB06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB06	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00318	KPRL3AGB06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB06-1	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00319	KPRL3AGB12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 12-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB12	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00320	KPRL3AGB12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 12-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB12-1	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00321	KPRL3AGB18	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 18-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB18	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00322	KPRL3AGB18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 18-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB18-1	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00323	KPRL3AGB24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB24	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00324	KPRL3AGB24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB24-1	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52, S53, S54 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*s1 (2021) Table 30 prints 'KPRL3XGB24-1' in the PRL3a row - treated as typo; s2/s4 give KPRL3AGB24-1.*		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00381	**4176B51**	PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00384	**4176B56**	PRL3a/3X deadfront device cover: LCL vertical cover 21X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00383	**4176B57**	PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00379	**4176B60**	PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00380	**4176B61**	PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00395	**4176B66**	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00397	**4176B67**	PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00387	**4176B68**	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (PRL3a, pre-2021)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00398	**4176B69**	PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00382	**4176B70**	PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cover 9X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00385	**4176B79**	PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00396	**4176B80**	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00400	**4178B08**	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horizontal cover, 6-48 ckt (H01-H08)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00401	**4179B39**	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horizontal cover, 4-32 ckt (H01-H08)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00402	**4179B40**	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00403	**4179B41**	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 3-pole cover 3X	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00404	**4179B42**	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 2-pole cover 2X	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00386	**4180B79**	PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt switch vertical cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00399	**4180B91**	PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00388	**4180B93**	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2021)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00375	**42C8076**	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (PRL3a) vertical cover, 7X, 4/0 max terminal	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00376	**42C8077**	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL3a) vertical cover, 10X, 300 kcmil max terminal	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00390	**42C8078**	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3 pole horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00391	**42C8079**	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00392	**42C8080**	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00393	**42C8081**	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 2-pole cover 2X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00394	**42C8082**	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 3-pole cover 3X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00374	**6559C59**	PRL3a/3X deadfront assembly frame (rails and end covers)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00381	4176B51	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)

OEM part number	4176B51	A	S52, S53 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	A	S52 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: L-Frame vertical cover 17X (PRL3a)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: LC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00384	4176B56	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: LCL vertical cover 21X

OEM part number	4176B56	A	S52, S53 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01/H02 top; H03/H04 bottom (without/with lock-offs)	A	S52 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: LCL vertical cover 21X	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00383	4176B57	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only

OEM part number	4176B57	A	S52, S53 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01	A	S52 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: LA-P vertical cover 21X, top only	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Tri-Pac		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00379	4176B60	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)

OEM part number	4176B60	A	S52, S53 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 bottom/H02 with lock-offs; H03 top/H04 with lock-offs	A	S52 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: J-Frame vertical cover 14X (PRL3a)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00380	4176B61	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)

OEM part number	4176B61	A	S52, S53 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	A	S52 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: K-Frame vertical cover 15X (PRL3a)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00395	4176B66	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3a)

OEM part number	4176B66	A	S52, S53 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S52 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3a). Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.28; oem_spec
Cross-links	Families: PRL3A · Breakers: CA		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00397	4176B67	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP horizontal cover

OEM part number	4176B67	A	S52, S53 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	6 ckt 3X H01; 12 ckt 5X H02; 18 ckt 8X H03; 24 ckt 10X H04	A	S52 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP horizontal cover. Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00387	4176B68	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (PRL3a, pre-2021)

OEM part number	4176B68	A	S53, S42 s2 p.24 Table 27; oem_spec
Alternate / superseded numbers	H01/H03 top; H04/H05 bottom (without / with lock-offs)	A	S53 style_number; p.24; oem_spec
	42C8076	C	S52, S53 superseded_by; inference
Description	EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (PRL3a, pre-2021)	A	S53, S42 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL3A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00398	4176B69	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cover

OEM part number	4176B69	A	S52, S53 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	6 ckt 3X H01; 12/5X H02; 18/8X H03; 24/10X H04	A	S52 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cover. Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00382	4176B70	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cover 9X

OEM part number	4176B70	A	S52, S53 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 FCL; H02 FB-P	A	S52 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: FCL (H01) and FB-P top-only (H02) vertical cover 9X	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Current-limiting FCL / LCL (and FDB+LFB), Tri-Pac		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00385	4176B79	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X

OEM part number	4176B79	A	S52, S53 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	Bottom H01 (no L/O), H02 (2 L/O), H03 (1 L/O RT), H04 (1 L/O LT); top H05, H07 (1 L/O RT), H08 (1 L/O LT)	A	S52 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: J-Frame sub-feed twin cover 20X	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00396	4176B80	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3a)

OEM part number	4176B80	A	S52, S53 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S52 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3a). Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.28; oem_spec
Cross-links	Families: PRL3A · Breakers: CA		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00400	4178B08	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horizontal cover, 6-48 ckt (H01-H08)

OEM part number	4178B08	A	S53, S42 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8078	C	S52, S53 superseded_by; inference
Description	F-frame twin-mounted 1-3 pole horizontal cover, 6-48 ckt (H01-H08)	A	S53, S42 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL3A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00401	4179B39	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horizontal cover, 4-32 ckt (H01-H08)

OEM part number	4179B39	A	S53, S42 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8079	C	S52, S53 superseded_by; inference
Description	F-frame twin-mounted 1-2 pole horizontal cover, 4-32 ckt (H01-H08)	A	S53, S42 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL3A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00402	4179B40	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X

OEM part number	4179B40	A	S53, S42 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8080	C	S52, S53 superseded_by; inference
Description	F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X	A	S53, S42 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL3A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00403	4179B41	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 3-pole cover 3X

OEM part number	4179B41	A	S53, S42 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8082	C	S52, S53 superseded_by; inference
Description	FD/HFD/FDC/ED/EDH/EDC single-mounted 3-pole cover 3X	A	S53, S42 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL3A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00404	4179B42	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 2-pole cover 2X

OEM part number	4179B42	A	S53, S42 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8081	C	S52, S53 superseded_by; inference
Description	FD/HFD/FDC/ED/EDH/EDC single-mounted 2-pole cover 2X	A	S53, S42 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL3A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00386	4180B79	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt switch vertical cover

OEM part number	4180B79	A	S52, S53 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	PT363 top H01 / bottom H02 (7X); PT364 top H03 / bottom H04 (9X)	A	S52 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: PT363 (100 A) / PT364 (200 A) pullout bolt switch vertical cover	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3A		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00399	4180B91	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover

OEM part number	4180B91	A	S52, S53 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	Controller 5X H01; Expansion 7X H02, 16X H03	A	S52 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: Pow-R-Command controller / expansion cover. Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00388	4180B93	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2021)

OEM part number	4180B93	A	S53, S42 s2 p.24 Table 27; oem_spec
Alternate / superseded numbers	H01/H03 top; H04/H05 bottom (without / with lock-offs)	A	S53 style_number; p.24; oem_spec
	42C8077	C	S52, S53 superseded_by; inference
Description	FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2021)	A	S53, S42 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL3A · Breakers: EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00375	42C8076	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (PRL3a) vertical cover, 7X, 4/0 max terminal

OEM part number	42C8076	A	S52 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom (same with/without lock-offs)	A	S52 style_number; pp.26-27; oem_spec
	4176B68 (4176B68 (H01 top/H03 top w lock-off; H04 bottom/H05 bottom w lock-off) in same PRL3a table row in 2009/2017 editions)	C	S52, S53, S42 supersedes; inference
Description	Vertical device deadfront cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (PRL3a) vertical cover, 7X, 4/0 max terminal	A	S52 pp.26-27; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00376	42C8077	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL3a) vertical cover, 10X, 300 kcmil max terminal

OEM part number	42C8077	A	S52 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S52 style_number; pp.26-27; oem_spec
	4180B93 (4180B93 (H01/H03 top; H04/H05 bottom) in same PRL3a table row in 2009/2017 editions)	C	S52, S53, S42 supersedes; inference
Description	Vertical device deadfront cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL3a) vertical cover, 10X, 300 kcmil max terminal	A	S52 pp.26-27; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00390	42C8078	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3 pole horizontal cover

OEM part number	42C8078	A	S52 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	6 ckt 3X H01; 12/6X H02; 18/9X H03; 24/12X H04; 30/15X H05; 36/18X H06; 42/21X H07; 48/24X H08	A	S52 style_number; pp.28-29; oem_spec
	4178B08 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S52, S53, S42 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3 pole horizontal cover. Note: connector kits ship with their own deadfront cover.	A	S52 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00391	42C8079	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizontal cover

OEM part number	42C8079	A	S52 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	4 ckt 2X H01; 8/4X H02; ... 32/16X H08	A	S52 style_number; pp.28-29; oem_spec
	4179B39 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S52, S53, S42 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizontal cover. Note: connector kits ship with their own deadfront cover.	A	S52 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00392	42C8080	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X

OEM part number	42C8080	A	S52 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S52 style_number; pp.28-29; oem_spec
	4179B40 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S52, S53, S42 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X. Note: connector kits ship with their own deadfront cover.	A	S52 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00393	42C8081	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 2-pole cover 2X

OEM part number	42C8081	A	S52 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S52 style_number; pp.28-29; oem_spec
	4179B42 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S52, S53, S42 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 2-pole cover 2X. Note: connector kits ship with their own deadfront cover.	A	S52 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00394	42C8082	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 3-pole cover 3X

OEM part number	42C8082	A	S52 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S52 style_number; pp.28-29; oem_spec
	4179B41 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S52, S53, S42 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 3-pole cover 3X. Note: connector kits ship with their own deadfront cover.	A	S52 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), EHD, ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00374	6559C59	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront assembly frame (rails and end covers)

OEM part number	6559C59	A	S52, S53 s1 p.25 Table 37; oem_spec
Alternate / superseded numbers	Chassis height 14X G01; 23X G02; 31X G03; 40X G04; 53X G05	A	S52 style_number; p.25; oem_spec
Description	Assembly includes frame only (two rails and two end covers); device covers ordered separately; all connector kits ship with a deadfront cover for that device	A	S52 p.25 note a; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.25; oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00389	**4176B72**	PRL3a/3X neutral / blank cover 1X-12X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00406	**4178B06H01**	PRL3a F-frame 1-pole provision filler (panels built before April 2019)	—	Listed through Oct 2017 edition; replaced by 42C8083H01 in A
EDH-EAT-00405	**42C8083H01**	PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00407	**6555C40H01**	PRL3a C-frame (CA/CAH/HCA) 2-pole deadfront blank filler	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00408	**6555C41H01**	PRL3a C-frame (CA/CAH/HCA) 3-pole deadfront blank filler	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00389	4176B72	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a/3X neutral / blank cover 1X-12X

OEM part number	4176B72	A	S52, S53, S54 s1 pp.26-27; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	H01 = 1X ... H12 = 12X	A	S52, S54 style_number; oem_spec
Description	Neutral/blank deadfront cover in X increments	A	S52 oem_spec
Dimensions	Fills 1 3/8 in (1X) to 16 1/2 in (12X) height; 13 in wide (for 20 in and 28 in wide boxes)	A	S54 p.7 Table 12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00406	4178B06H01	Cutler-Hammer	filler-plate	LISTED THROUGH OCT 201

PRL3a F-frame 1-pole provision filler (panels built before April 2019)

OEM part number	4178B06H01	A	S53, S42, S54, S59 s2 p.25 Table 29; s4 p.12; oem_spec
Alternate / superseded numbers	42C8083H01	B	S52, S58, S59 superseded_by; oem_spec
Description	PRL3a deadfront cover blank filler, F-Frame, 1, 2 or 3 poles (Pow-R-Kit: 'PRL 3a F-Frame 1-Pole Provision Fillers')	A	S53, S54 oem_spec
Application	Panels built prior to April 2019	C	S59 distributor
Finish / plating	Black	C	same as above
Status	Listed through Oct 2017 edition; replaced by 42C8083H01 in April 2021 edition; still listed by Rexel (UPC 786685467672)	B	S52, S42, S59 oem_spec
Cross-links	Families: PRL3A · Breakers: EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00405	42C8083H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019)

OEM part number	42C8083H01	A	S52, S58 s1 p.30 Tables 42-43; oem_spec
Alternate / superseded numbers	4178B06H01 (Same table row (F-Frame blank filler) in 2017 edition; distributors describe 4178B06H01 as for panels built prior to April 2019 and 42C8083H01 as after April 2019 - not interchangeable across build dates)	B	S52, S42, S58, S59 supersedes; oem_spec
Description	Deadfront cover blank filler, F-Frame (PRL3a) / PDG2 (PRL3X), 1, 2 or 3 poles	A	S52 p.30; oem_spec
Application	Panels built after April 2019	C	S58 distributor
Dimensions	Length 4.220 in	C	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.30; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: EHD, Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00407	6555C40H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a C-frame (CA/CAH/HCA) 2-pole deadfront blank filler

OEM part number	6555C40H01	A	S52, S53 s1 p.30 Table 43; oem_spec
Description	Deadfront cover blank filler, C-Frame, 2-pole	A	S52, S53 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.30; oem_spec
Cross-links	Families: PRL3A · Breakers: CA		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00408	6555C41H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a C-frame (CA/CAH/HCA) 3-pole deadfront blank filler

OEM part number	6555C41H01	A	S52, S53 s1 p.30 Table 43; oem_spec
Description	Deadfront cover blank filler, C-Frame, 3-pole	A	S52, S53 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.30; oem_spec
Cross-links	Families: PRL3A · Breakers: CA		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00342	**5078A98**	PRL3a/PRL3X service entrance bonding jumper kit	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00342	5078A98	Cutler-Hammer	hardware-kit	LISTED AS STOCK RENEWA

PRL3a/PRL3X service entrance bonding jumper kit

OEM part number	5078A98	A	S52, S53, S54 s1 p.24 Table 34; oem_spec
Alternate / superseded numbers	Mechanical: 100 A G01-G04, 250-600 A G13-G16; Crimp: 100 A G05-G08, 250-600 A G17-G20; Copper lugs: 100 A G09-G12, 250-600 A G21-G24 (order tin Al / bare Cu / silver Cu / tin Cu)	A	S52 style_number; p.24; oem_spec
Description	Service entrance bonding jumper kit; example 100 A tin-plated aluminum = 5078A98G01	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.15 PRL3E — Pow-R-Line 3E

FAM-EAT-019 · panelboard · aka PRL3e, Pow-R-Line 3E · markings: Cutler-Hammer, Eaton

Compact distribution panelboard variant built around Eaton EG-frame (Series G E-frame) bolt-on branch breakers up to 125 A. Not covered by the renewal-parts guides found; no PRL3E connector kits identified.

Attribute	Value	Cl.	Sources
Status	Current in June 2020 catalog	A	S56 p.V2-T3-2; oem_spec
Era of manufacture	Shown in January 2018 and June 2020 catalogs	A	S56, S57 oem_spec
Voltage rating	240, 480Y/277 or 480 Vac; 250 Vdc	A	S56, S57 s6 p.V2-T3-11; oem_spec
Main ampacity	MLO 100, 250, 400, 600 A; main breakers 100-600 A	A	S57 p.22.3-5; oem_spec
Branch breakers accepted	EGB/EGS/EGH (E-frame) 15-125 A, 1-3 pole; mains EG (horizontal), EDB/EDS/ED/EDH/EDC, FD/HFD/FDC, DK/KD/HKD/KDC, LHH, LGE/LGH	A	S57 p.22.3-5 Tables 22.3-8, 22.3-9; oem_spec

Breaker families associated: Series G E-frame (EGB/EGS/EGH)
Key documents: S56 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S57 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

3.16 PRL3X — Pow-R-Line Xpert 3X

FAM-EAT-022 · panelboard · aka PRL3x, Pow-R-Line 3X · markings: Eaton

Successor to PRL3a; same 20 in box and X-unit chassis concept. Uses KPRL3X* connector kits and 42C80xx deadfront covers (PDG2 replaces F-frame).

Attribute	Value	Cl.	Sources
Status	Current	A	S56 oem_spec
Era of manufacture	Introduced 2020	A	S52 p.2; oem_spec
Voltage rating	240, 480 or 600 Vac; 250 Vdc	A	S56 p.V2-T3-11; oem_spec
Main ampacity	MLO 800 A; main device 600 A	A	same as above
Branch breakers accepted	Bolt-on 15-225 A: BAB/QBH family, GHB family, PDG2 (twin to 150 A, single 175-225 A); vertical PDG2/PDG3 mains	A	S52, S56 oem_spec

Breaker families associated: BAB, GB, Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3)
Key documents: S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S56 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control
Also fits this family (entry printed elsewhere): 5155C81G01, PRLSEBGHB, 5078A98, 5158C05, 2C11296, 5155C62H01, 6559C59, 42C8076, 42C8077, 4176B72, 42C8078, 42C8079, 42C8080, 42C8081, 42C8082, 4176B67, 4176B69, 4180B91, 42C8083H01, 5155C81G03, 2C11641G02, 5157C83G06, 7499A48G04

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00329	**KPRL3X21T**	PRL3X horizontal PDG2 breaker connector kit (PDG2 1-pole twin mount...)	PDG2 1-pole twin mount, 150 A max. Frame devices above 150 A must be s **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00326	**KPRL3X22**	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)	PDG2 2-pole, single mount 175-225 A. Frame devices above 150 A must be **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00328	**KPRL3X22T**	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)	PDG2 2-pole twin mount, 150 A max. Frame devices above 150 A must be s **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00325	**KPRL3X23**	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)	PDG2 3-pole, single mount 175-225 A (1) 225 A max. Frame devices above **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00327	**KPRL3X23T**	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)	PDG2 3-pole twin mount, (2) 150 A devices max. Frame devices above 150 **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00293	**KPRL3XBA06**	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00294	**KPRL3XBA06-1**	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00295	**KPRL3XBA12**	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00296	**KPRL3XBA12-1**	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00297	**KPRL3XBA18**	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00298	**KPRL3XBA18-1**	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00299	**KPRL3XBA24**	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00300	**KPRL3XBA24-1**	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00301	**KPRL3XGB06**	PRL3X horizontal 6-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00302	**KPRL3XGB06-1**	PRL3X horizontal 6-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00303	**KPRL3XGB12**	PRL3X horizontal 12-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00304	**KPRL3XGB12-1**	PRL3X horizontal 12-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00305	**KPRL3XGB18**	PRL3X horizontal 18-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00306	**KPRL3XGB18-1**	PRL3X horizontal 18-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00307	**KPRL3XGB24**	PRL3X horizontal 24-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00308	**KPRL3XGB24-1**	PRL3X horizontal 24-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00329	KPRL3X21T	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 1-pole twin mount...)

OEM part number	KPRL3X21T	**A**	S52 s1 p.23 Table 31; oem_spec
Description	Horizontally mounted connector kit: PDG2 1-pole twin mount, 150 A max; phases A/C	**A**	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	**C**	S57 p.22.3-1; inference
Breaker compatibility	PDG2 1-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	**A**	S52 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	**A**	S52 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00326	KPRL3X22	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)

OEM part number	KPRL3X22	**A**	S52 s1 p.23 Table 31; oem_spec
Description	Horizontally mounted connector kit: PDG2 2-pole, single mount 175-225 A; phases A/C	**A**	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	**C**	S57 p.22.3-1; inference
Breaker compatibility	PDG2 2-pole, single mount 175-225 A. Frame devices above 150 A must be single mounted; no twin mounting.	**A**	S52 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	**A**	S52 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00328	KPRL3X22T	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)

OEM part number	KPRL3X22T	**A**	S52 s1 p.23 Table 31; oem_spec
Description	Horizontally mounted connector kit: PDG2 2-pole twin mount, 150 A max; phases A/C	**A**	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	**C**	S57 p.22.3-1; inference
Breaker compatibility	PDG2 2-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	**A**	S52 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	**A**	S52 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00325	KPRL3X23	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)

OEM part number	KPRL3X23	A	S52 s1 p.23 Table 31; oem_spec
Description	Horizontally mounted connector kit: PDG2 3-pole, single mount 175-225 A (1) 225 A max; phases A/B/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S57 p.22.3-1; inference
Breaker compatibility	PDG2 3-pole, single mount 175-225 A (1) 225 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S52 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S52 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00327	KPRL3X23T	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)

OEM part number	KPRL3X23T	A	S52 s1 p.23 Table 31; oem_spec
Description	Horizontally mounted connector kit: PDG2 3-pole twin mount, (2) 150 A devices max; phases A/B/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S57 p.22.3-1; inference
Breaker compatibility	PDG2 3-pole twin mount, (2) 150 A devices max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S52 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S52 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00293	KPRL3XBA06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA06	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00294	KPRL3XBA06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA06-1	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00295	KPRL3XBA12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA12	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00296	KPRL3XBA12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA12-1	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00297	KPRL3XBA18	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA18	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00298	KPRL3XBA18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA18-1	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00299	KPRL3XBA24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA24	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00300	KPRL3XBA24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA24-1	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00301	KPRL3XGB06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB06	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00302	KPRL3XGB06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB06-1	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00303	KPRL3XGB12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB12	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00304	KPRL3XGB12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB12-1	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00305	KPRL3XGB18	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB18	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00306	KPRL3XGB18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB18-1	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00307	KPRL3XGB24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB24	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00308	KPRL3XGB24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB24-1	A	S52 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S52 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S52 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S52, S54 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S52, S53 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00340	**PRLSEBPD2**	Service entrance barrier kit for PDG2 main breaker	PDG2 **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00339	**PRLSEBPD3**	Service entrance barrier kit for PDF3/PDG3 main breaker	PDF3/PDG3 **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00340 **PRLSEBPD2** Cutler-Hammer barrier **LISTED AS STOCK RENEWA**

Service entrance barrier kit for PDG2 main breaker

OEM part number	PRLSEBPD2	**A**	S52, S42 s1 p.25 Table 35; oem_spec
Description	Service entrance barrier for PDG2 main breaker (service entrance main breaker kit)	**A**	S52 s1 p.25 Table 35; oem_spec
Application	main (service entrance)	**A**	S52 oem_spec
Breaker compatibility	PDG2	**A**	S52 s1 p.25 Table 35; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00339 **PRLSEBPD3** Cutler-Hammer barrier **LISTED AS STOCK RENEWA**

Service entrance barrier kit for PDF3/PDG3 main breaker

OEM part number	PRLSEBPD3	**A**	S52, S42 s1 p.25 Table 35; oem_spec
Description	Service entrance barrier for PDF3/PDG3 main breaker (service entrance main breaker kit)	**A**	S52 s1 p.25 Table 35; oem_spec
Application	main (service entrance)	**A**	S52 oem_spec
Breaker compatibility	PDF3/PDG3	**A**	S52 s1 p.25 Table 35; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00377	**42C7980**	PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00378	**42C8055**	PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock-off version	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00377	42C7980	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)

OEM part number	42C7980	A	S52 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top (thermal-magnetic), H02 bottom (PXR)	A	S52 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: PDG3 400 A vertical cover, 15X (PRL3X)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00378	42C8055	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock-off version

OEM part number	42C8055	A	S52 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S52 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock-off version	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.26; oem_spec
Cross-links	Families: PRL3X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.17 PRL4 — Pow-R-Line 4 panelboard (PRL4B / PRL4F)

FAM-EAT-014 · panelboard · aka PRL-4, PRL4, PRL4B, PRL4D, PRL4F, PRL4X, Pow-R-Line 4, Pow-R-Line 4B, Pow-R-Line 4D, Pow-R-Line 4F · markings: Cutler-Hammer, Eaton, Westinghouse

Westinghouse-origin power distribution panelboard (24, 36, 44 in box widths) that replaced CDP (PRL4B) and FDP (PRL4F). Its KPRL4 breaker connector kits (copper connectors, brackets, covers, hardware) are the most completely documented group-mount kits for Series C FD/JD/KD/LD/MDL/ND frames; included here because the same device X-spacing is used in Pow-R-Line C switchboard distribution chassis.

Heavy distribution panelboard in 24, 36 or 44 in wide boxes (BX2457..BX4490), neutral in main gutter, vertical bus with branch devices horizontally mounted single or twin on KPRL4* connector kits measured in X units (1X = 1.38 in). Front is a vented cover assembly (two side rails, top/bottom vented covers, 6574C74) plus individual device covers and blank covers (6554C01/6554C02). Density-rated bus option required for some 100% rated breaker kits.

Attribute	Value	Cl.	Sources
Status	current (PRL4X / Pow-R-Line Xpert naming in 2022 RP01400001E)	A	S42 p. 32; oem_spec
	Legacy; renewal parts listed April 2021; superseded by PRL4X/PRL4DX (PRL4F continues in Xpert catalog)	A	S52, S56 oem_spec
Era of manufacture	PRL4B/F introduced October 1987 (originally a Westinghouse product)	A	S41, S38 RP01400001E (2017) p. 2 Table 1; V12-T4-18; oem_spec
	PRL4B/F introduced October 1987	A	S52, S53 p.2 Table 1; oem_spec
Successor	PRL4X	A	S52, S56 oem_spec
Voltage rating	240, 480 or 600 Vac; 600 Vdc maximum	A	S57 p.22.4-1; oem_spec
Main ampacity	1200 A maximum	A	S38 p. V12-T4-18; oem_spec
	MLO 250, 400, 600, 800, 1200 A; main breakers 250-1200 A; main switches 200-1200 A	A	S57 p.22.4-1; oem_spec
Branch breakers accepted	Bolt-on breakers 15-1200 A (EHD..FDC, ED, JD, DK/KD, CKD, LD, LG, LHH, MDL, ND, NHH, CA, FCL, LCL, FB-P, LA-P, NB-P); drawout 20-600 A (PRL4D); fusible switches FDPW/FDPB 30-1200 A (PRL4F)	A	S52, S57 s1 pp.32-34; s7 p.22.4-1; oem_spec

Attribute	Value	Cl.	Sources
box_widths	PRL4 standard widths 24.00, 36.00 and 44.00 in	A	S41 p. 2; oem_spec
box_width	24.00, 36.00, 44.00 in (609.6, 914.4, 1117.6 mm)	A	S52 p.2; oem_spec
bus	250-1200 A tin-plated aluminum standard, copper optional, density-rated bus optional	A	S57 p.22.4-1; oem_spec

Breaker families associated: CA, Current-limiting FCL / LCL (and FDB+LFB), ED, EHD, FD, JD, KD, LC, LD, MA, MDL, NB, ND, Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, Tri-Pac

Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S41 RP01400001E (2017) Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, ; S42 RP01400001E Renewal Parts RP01400001E — Pow-R-Line Xpert and legacy panelboards; S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S53 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S54 RP01414001E Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E; S56 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S57 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

Also fits this family (entry printed elsewhere): TAD3, K80522, K80133, K80429, 5157C83G06

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00108	**KPRL44X**	PRL4F fusible switch connector kit 4X (60 A)	60 A FDPWT3222R/FDPWT 3622R (also fits FDP and FDPW switches) A	listed 2017 and 2022
EDH-EAT-00416	**KPRL45X**	PRL4F fusible switch connector kit KPRL45X	FDPW 100-100 A twin switch, 600 V (2009 number) (three-pole switch, no A	Listed in 2009/2011 editions only
EDH-EAT-00109	**KPRL45X1**	PRL4F fusible switch connector kit 5X (100 A)	100 A 600 V FDPWT3633R A	listed 2017 and 2022
EDH-EAT-00417	**KPRL45XS**	PRL4F fusible switch connector kit KPRL45XS	FDPW 100 A single-mount switch (three-pole switch, not included) A	Listed in 2009/2011 editions only
EDH-EAT-00110	**KPRL4B6XS**	PRL4F fusible switch connector kit 6X (200 A)	200 A FDPBS324R/FDPBS364R A	listed 2017 and 2022
EDH-EAT-00111	**KPRL4B6XT**	PRL4F fusible switch connector kit 6X (200 A)	200 A FDPBT3244R/FDPBT3644R (44 in box) A	listed 2017 and 2022
EDH-EAT-00103	**KPRL4CA**	PRL4X/PRL4 breaker connector kit, twin-mount 2X/3X, CA/CAH/HCA	CA/CAH/HCA A	current (May 2022)
EDH-EAT-00086	**KPRL4CKD**	PRL4 breaker connector kit, single-mount 4X, for CKD, CHKD (100% rated)	CKD, CHKD (100% rated) A	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00092	**KPRL4CND**	PRL4 breaker connector kit, single-mount 6X, for CND, CHND (100% rated)	CND, CHND (100% rated) A	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00081	**KPRL4ED**	PRL4 breaker connector kit, twin-mount 3X, for ED, EDH, EDC	ED, EDH, EDC A	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00078	**KPRL4ED2**	PRL4 breaker connector kit, twin-mount 2X, for ED, EDH, EDC	ED, EDH, EDC A	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00080	**KPRL4FBP**	PRL4 breaker connector kit, twin-mount 3X, for FCL, FB-P, FD/LFD	FCL, FB-P, FD/LFD A	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00079	**KPRL4FD**	PRL4 breaker connector kit, twin-mount 3X, for EHD, FD, FDB, HFD, FDC	EHD, FD, FDB, HFD, FDC A	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00076	**KPRL4FD1**	PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, HFD	EHD, FD, HFD A	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00077	**KPRL4FD2**	PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, FDB, HFD, FDC	EHD, FD, FDB, HFD, FDC A	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00102	**KPRL4FDCL**	PRL4X/PRL4 breaker connector kit, single-mount 3X, FD current limiter (single mounting only)	FD current limiter (single mounting only) A	current (May 2022)
EDH-EAT-00082	**KPRL4JDS**	PRL4 breaker connector kit, single-mount 3X, for JD, JDB, HJD, JDC	JD, JDB, HJD, JDC A	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00083	**KPRL4JDT**	PRL4 breaker connector kit, twin-mount 3X, for JD, JDB, HJD, JDC	JD, JDB, HJD, JDC A	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00084	**KPRL4KDS**	PRL4 breaker connector kit, single-mount 4X, for DK, KD, KDB, HKD, KDC	DK, KD, KDB, HKD, KDC A	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00085	**KPRL4KDT**	PRL4 breaker connector kit, twin-mount 4X, for DK, KD, KDB, HKD, KDC	DK, KD, KDB, HKD, KDC A	listed in both 2017 and May 2022 RP01400001E

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00088	**KPRL4LAP**	PRL4 breaker connector kit, single-mount 6X, for LA-P	LA-P **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00104	**KPRL4LC**	PRL4X/PRL4 breaker connector kit, single-mount 6X, LC/LCY/HLC/LD/HLD/LDC/LDB [LA]	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; 100%: CLD/CHLD/CLDC, LCC/HLCC **A**	current (May 2022)
EDH-EAT-00087	**KPRL4LCL**	PRL4 breaker connector kit, single-mount 6X, for LCL	LCL **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00089	**KPRL4LD**	PRL4 breaker connector kit, single-mount 6X, for LD, LDB, HLD, LDC, CLD, LC	LD, LDB, HLD, LDC, CLD, LC **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00105	**KPRL4LG**	PRL4X/PRL4 breaker connector kit, single-mount 4X, LHH	LHH **A**	current (May 2022)
EDH-EAT-00090	**KPRL4MC**	PRL4 breaker connector kit, single-mount 6X, for MDL, HMDL	MDL, HMDL **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00107	**KPRL4MD**	PRL4X/PRL4 breaker connector kit, single-mount 6X, CMDL/CHMDL (100% rated	CMDL/CHMDL (100% rated; density rated bus) **A**	current (May 2022)
EDH-EAT-00091	**KPRL4NBP**	PRL4 breaker connector kit, single-mount 6X, for NB-P	NB-P **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00106	**KPRL4NC**	PRL4X/PRL4 breaker connector kit, single-mount 6X, NC/NCY/HNC [NB/HNB]	NC/NCY/HNC [NB/HNB] **A**	current (May 2022)
EDH-EAT-00093	**KPRL4ND**	PRL4 breaker connector kit, single-mount 6X, for ND, HND	ND, HND **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00113	**KPRL4W11X**	PRL4F fusible switch connector kit 11X (600 A)	600 A FDPW326R/FDPW366R and 800 A FDPW327/FDPW367 (44 in box) **A**	listed 2017 and 2022
EDH-EAT-00114	**KPRL4W15X**	PRL4F fusible switch connector kit 15X (1200 A)	1200 A FDPW328/FDPW368 (44 in box) **A**	listed 2017 and 2022
EDH-EAT-00112	**KPRL4W9X**	PRL4F fusible switch connector kit 9X (400 A)	400 A FDPW325R/FDPW365R **A**	listed 2017 and 2022
EDH-EAT-00094	**KPRL4X12**	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC (PD2)	EHD/FDB/FD/HFD/FDC (PD2) **A**	current (May 2022)
EDH-EAT-00095	**KPRL4X22**	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (PD2)	EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (PD2) **A**	current (May 2022)
EDH-EAT-00096	**KPRL4X32**	PRL4X/PRL4 breaker connector kit, twin-mount 3X, ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDCE (PD2)	ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDCE (PD2) **A**	current (May 2022)
EDH-EAT-00097	**KPRL4X334S**	PRL4X/PRL4 breaker connector kit, single-mount 4X, PD3 400 A frame	PD3 400 A frame **A**	current (May 2022)
EDH-EAT-00098	**KPRL4X334T**	PRL4X/PRL4 breaker connector kit, twin-mount 4X, PD3 400 A frame	PD3 400 A frame **A**	current (May 2022)
EDH-EAT-00099	**KPRL4X336**	PRL4X/PRL4 breaker connector kit, single-mount 4X, PD3 600 A frame	PD3 600 A frame; LGE/LGS/LGH/LGC/LGU **A**	current (May 2022)
EDH-EAT-00100	**KPRL4X34**	PRL4X/PRL4 breaker connector kit, single-mount 6X, PD4	PD4; MDL/HMDL **A**	current (May 2022)
EDH-EAT-00101	**KPRL4X35**	PRL4X/PRL4 breaker connector kit, single-mount 6X, PD5	PD5; ND/HND/NDC/NGS/NGH/NGC **A**	current (May 2022)

EDH-EAT-00108	KPRL44X	Cutler-Hammer	branch-connector-kit	LISTED 2017 AND 2022

PRL4F fusible switch connector kit 4X (60 A)

OEM part number	KPRL44X	A	S41, S42, S52, S53, S54 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S41 p. 25; oem_spec
	PRL4F fusible switch connector kit for FDPWT3222R (240 V) / FDPWT3622R (600 V) 60-60 A twin switch; fits FDP and FDPW switches	A	S52, S53, S42, S54 oem_spec
Application	branch	A	S41 p. 25; oem_spec
Breaker compatibility	60 A FDPWT3222R/FDPWT3622R (also fits FDP and FDPW switches)	A	S41 p. 25 Table 38; oem_spec
	FDPWT3222R (240 V) / FDPWT3622R (600 V) 60-60 A twin switch; fits FDP and FDPW switches (three-pole switch, not included)	A	S52, S53, S42, S54 oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S52 oem_spec
Dimensions	4X switch height	A	S41 p. 25; oem_spec
	Switch space 4X (5.50 in)	A	S52 oem_spec
Status	listed 2017 and 2022	A	S41, S42 oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.34; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00416	KPRL45X	Cutler-Hammer	branch-connector-kit	LISTED IN 2009/2011 ED

PRL4F fusible switch connector kit KPRL45X

OEM part number	KPRL45X	A	S53, S54 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	KPRL45X1	C	S52, S53, S42 superseded_by; inference
Description	PRL4F fusible switch connector kit for FDPW 100-100 A twin switch, 600 V (2009 number)	A	S53, S54 oem_spec
Breaker compatibility	FDPW 100-100 A twin switch, 600 V (2009 number) (three-pole switch, not included)	A	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S53 oem_spec
Dimensions	Switch space 5X (6.88 in)	A	same as above
Status	Listed in 2009/2011 editions only	B	S53, S54 inference
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00109	KPRL45X1	Cutler-Hammer	branch-connector-kit	LISTED 2017 AND 2022

PRL4F fusible switch connector kit 5X (100 A)

OEM part number	KPRL45X1	A	S41, S42, S52 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Alternate / superseded numbers	KPRL45X (Same table row; 2009 KPRL45X, 2017/2021 KPRL45X1)	C	S52, S53, S42 supersedes; inference
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S41 p. 25; oem_spec
	PRL4F fusible switch connector kit for FDPWT3633R 600 V 100-100 A twin switch (2021 number)	A	S52, S42 oem_spec
Application	branch	A	S41 p. 25; oem_spec
Breaker compatibility	100 A 600 V FDPWT3633R	A	S41 p. 25 Table 38; oem_spec
	FDPWT3633R 600 V 100-100 A twin switch (2021 number) (three-pole switch, not included)	A	S52, S42 oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S52 oem_spec
Dimensions	5X switch height	A	S41 p. 25; oem_spec
	Switch space 5X (6.88 in)	A	S52 oem_spec
Status	listed 2017 and 2022	A	S41, S42 oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.34; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00417	KPRL45XS	Cutler-Hammer	branch-connector-kit	LISTED IN 2009/2011 ED

PRL4F fusible switch connector kit KPRL45XS

OEM part number	KPRL45XS	A	S54 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPW 100 A single-mount switch	A	S54 oem_spec
Breaker compatibility	FDPW 100 A single-mount switch (three-pole switch, not included)	A	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	same as above
Dimensions	Switch space unknown	D	same as above
Status	Listed in 2009/2011 editions only	B	S54 inference
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00110	KPRL4B6XS	Cutler-Hammer	branch-connector-kit	LISTED 2017 AND 2022

PRL4F fusible switch connector kit 6X (200 A)

OEM part number	KPRL4B6XS	A	S41, S42, S52, S53, S54 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S41 p. 25; oem_spec
	PRL4F fusible switch connector kit for FDPBS324R / FDPBS364R 200 A single switch	A	S52, S53, S42, S54 oem_spec
Application	branch	A	S41 p. 25; oem_spec
Breaker compatibility	200 A FDPBS324R/FDPBS364R	A	S41 p. 25 Table 38; oem_spec
	FDPBS324R / FDPBS364R 200 A single switch (three-pole switch, not included)	A	S52, S53, S42, S54 oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S52 oem_spec
Dimensions	6X switch height	A	S41 p. 25; oem_spec
	Switch space 6X (8.25 in)	A	S52 oem_spec
Status	listed 2017 and 2022	A	S41, S42 oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.34; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00111	KPRL4B6XT	Cutler-Hammer	branch-connector-kit	LISTED 2017 AND 2022

PRL4F fusible switch connector kit 6X (200 A)

OEM part number	KPRL4B6XT	A	S41, S42, S52, S53, S54 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S41 p. 25; oem_spec
	PRL4F fusible switch connector kit for FDPBT3244R / FDPBT3644R 200-200 A twin switch; 44 in box required	A	S52, S53, S42, S54 oem_spec
Application	branch	A	S41 p. 25; oem_spec
Breaker compatibility	200 A FDPBT3244R/FDPBT3644R (44 in box)	A	S41 p. 25 Table 38; oem_spec
	FDPBT3244R / FDPBT3644R 200-200 A twin switch; 44 in box required (three-pole switch, not included)	A	S52, S53, S42, S54 oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S52 oem_spec
Dimensions	6X switch height	A	S41 p. 25; oem_spec
	Switch space 6X (8.25 in)	A	S52 oem_spec
Status	listed 2017 and 2022	A	S41, S42 oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.34; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00103	KPRL4CA	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, twin-mount 2X/3X, CA/CAH/HCA

OEM part number	KPRL4CA	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec

	PRL4 breaker connector kit for CA/CAH/HCA 2-pole (2X) or 3-pole (3X)	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Twin (2-pole: 36 in min box)	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	CA/CAH/HCA	A	S42 pp. 32-33; oem_spec
	CA/CAH/HCA 2-pole (2X) or 3-pole (3X)	A	S52 s1 pp.32-33; oem_spec
Poles	2, 3	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	2.75 in (2P, 2X) or 4.13 in (3P, 3X) = 2X/3X; twin mounting	A	S42 pp. 32-33; oem_spec
	Space required 2X/3X (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: CA		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00086 **KPRL4CKD** Cutler-Hammer branch-connector-kit **LISTED IN BOTH 2017 AN**

PRL4 breaker connector kit, single-mount 4X, for CKD, CHKD (100% rated)

OEM part number	KPRL4CKD	A	S41, S52, S53, S42 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for 100% rated CKD/CHKD/CKDC 3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S41 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 44 in box; density-rated bus required	A	S52 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	CKD, CHKD (100% rated)	A	S41 p. 24 Table 37; oem_spec
	100% rated CKD/CHKD/CKDC 3-pole	A	S52, S53, S42 s1 pp.32-33; oem_spec
Poles	2, 3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	Occupies 5.50 in (139.7 mm) = 4X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
	Space required 4X (5.50 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec

	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
install_constraint	44.00 in box width; requires density rated bus in existing chassis	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: KD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00092	KPRL4CND	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 6X, for CND, CHND (100% rated)

OEM part number	KPRL4CND	A	S41, S52, S53, S42 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for 100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S41 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 44 in box; density-rated bus required	A	S52 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	CND, CHND (100% rated)	A	S41 p. 24 Table 37; oem_spec
	100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole	A	S52, S53, S42 s1 pp.32-33; oem_spec
Poles	3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
	Space required 6X (8.25 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
install_constraint	44.00 in box width; requires density rated bus	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: NB, ND		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00081	KPRL4ED	Cutler-Hammer	branch-connector-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit, twin-mount 3X, for ED, EDH, EDC

OEM part number	KPRL4ED	A	S41, S53, S42 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X32 (Same breaker frames/space listed under KPRL4X32 in May 2022 RP01400001E while KPRL4ED is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference

Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for ED, EDH, EDC 3-pole	A	S53, S42 oem_spec
Application	branch	A	S41 p. 24; oem_spec
Installation location	Mounting: Twin	A	S53 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	ED, EDH, EDC	A	S41 p. 24 Table 37; oem_spec
	ED, EDH, EDC 3-pole	A	S53, S42 s2 p.28; oem_spec
Poles	3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S53 p.28; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
	3X space (1X = 1.38 in)	A	S53 p.28; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S52, S53, S42 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X32)	C	S41, S42 inference
Replacement / successor	KPRL4X32 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S52 inference
Cross-links	Families: PRL4 · Breakers: ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00078	KPRL4ED2	Cutler-Hammer	branch-connector-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit, twin-mount 2X, for ED, EDH, EDC

OEM part number	KPRL4ED2	A	S41, S53, S42 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X22 (Same breaker frames/space listed under KPRL4X22 in May 2022 RP01400001E while KPRL4ED2 is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for ED, EDH, EDC 2-pole	A	S53, S42 oem_spec
Application	branch	A	S41 p. 24; oem_spec
Installation location	Mounting: Twin	A	S53 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	ED, EDH, EDC	A	S41 p. 24 Table 37; oem_spec
	ED, EDH, EDC 2-pole	A	S53, S42 s2 p.28; oem_spec
Poles	2	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S53 p.28; oem_spec

Dimensions	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
	2X space (1X = 1.38 in)	A	S53 p.28; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S52, S53, S42 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X22)	C	S41, S42 inference
Replacement / successor	KPRL4X22 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S52 inference
Cross-links	Families: PRL4 · Breakers: ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00080	KPRL4FBP	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, twin-mount 3X, for FCL, FB-P, FD/LFD

OEM part number	KPRL4FBP	A	S41, S52, S53, S42 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for FCL, FB-P, FD/LFD 3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S41 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Twin	A	S52 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	FCL, FB-P, FD/LFD	A	S41 p. 24 Table 37; oem_spec
	FCL, FB-P, FD/LFD 3-pole	A	S52, S53, S42 s1 pp.32-33; oem_spec
Poles	3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
	Space required 3X (4.13 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: EHD, FD, Tri-Pac, Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00079	KPRL4FD	Cutler-Hammer	branch-connector-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit, twin-mount 3X, for EHD, FD, FDB, HFD, FDC

OEM part number	KPRL4FD	A	S41, S53, S42, S54, S60 RP01400001E (2017) p. 24 Table 37; oem_spec

Alternate / superseded numbers	KPRL4X32 (Same breaker frames/space listed under KPRL4X32 in May 2022 RP01400001E while KPRL4FD is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for EHD, FD, FDB, HFD, FDC 3-pole, 225 A (single- and twin-mount per 2011 supplement)	A	S53, S42 oem_spec
Application	branch	A	S41 p. 24; oem_spec
Installation location	Mounting: Twin	A	S53 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC	A	S41 p. 24 Table 37; oem_spec
	EHD, FD, FDB, HFD, FDC 3-pole, 225 A (single- and twin-mount per 2011 supplement)	A	S53, S42, S54 s2 p.28; oem_spec
Poles	3	A	S41 p. 24 Table 37; oem_spec
Current rating	225 A	A	S54 p.9 Table 15; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S53 p.28; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
	3X space (1X = 1.38 in)	A	S53 p.28; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S52, S53, S42 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X32)	C	S41, S42 inference
Replacement / successor	KPRL4X32 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S52 inference
Aftermarket / reproduction	Distributors list as 3P twin mount 225 A for EHD/FD/FDB/HFD/FDC; Elliott Electric marks item inactive	C	S50 distributor
	Still stocked by Elliott Electric (UPC 782114795941, UL 67, 'PRL4 Conn Kit Twin MTD 3P E/F-FRM BKR')	C	S60 distributor
Cross-links	Families: PRL4 · Breakers: EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00076	KPRL4FD1	Cutler-Hammer	branch-connector-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, HFD

OEM part number	KPRL4FD1	A	S41, S53, S42 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X12 (Same breaker frames/space listed under KPRL4X12 in May 2022 RP01400001E while KPRL4FD1 is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for EHD, FD, HFD 1-pole (two sets twin-mounted 1-pole)	A	S53, S42 oem_spec
Application	branch	A	S41 p. 24; oem_spec
Installation location	Mounting: Twin	A	S53 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference

Breaker compatibility	EHD, FD, HFD	A	S41 p. 24 Table 37; oem_spec
	EHD, FD, HFD 1-pole (two sets twin-mounted 1-pole)	A	S53, S42 s2 p.28; oem_spec
Poles	1 (two sets of twin-mounted single-pole)	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S53 p.28; oem_spec
Dimensions	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
	2X space (1X = 1.38 in)	A	S53 p.28; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S52, S53, S42 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X12)	C	S41, S42 inference
Replacement / successor	KPRL4X12 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S52 inference
Cross-links	Families: PRL4 · Breakers: EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00077	KPRL4FD2	Cutler-Hammer	branch-connector-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, FDB, HFD, FDC

OEM part number	KPRL4FD2	A	S41, S53, S42 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X22 (Same breaker frames/space listed under KPRL4X22 in May 2022 RP01400001E while KPRL4FD2 is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for EHD, FD, FDB, HFD, FDC 2-pole	A	S53, S42 oem_spec
Application	branch	A	S41 p. 24; oem_spec
Installation location	Mounting: Twin	A	S53 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC	A	S41 p. 24 Table 37; oem_spec
	EHD, FD, FDB, HFD, FDC 2-pole	A	S53, S42 s2 p.28; oem_spec
Poles	2	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S53 p.28; oem_spec
Dimensions	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
	2X space (1X = 1.38 in)	A	S53 p.28; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S52, S53, S42 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X22)	C	S41, S42 inference
Replacement / successor	KPRL4X22 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S52 inference
Cross-links	Families: PRL4 · Breakers: EHD, FD		

Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00102	KPRL4FDCL	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 3X, FD current limiter (single mounting only)

OEM part number	KPRL4FDCL	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for FD current limiter, 3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single only	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	FD current limiter (single mounting only)	A	S42 pp. 32-33; oem_spec
	FD current limiter, 3-pole	A	S52 s1 pp.32-33; oem_spec
Poles	3	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	4.13 in (104.9 mm) = 3X; single mounting	A	S42 pp. 32-33; oem_spec
	Space required 3X (4.13 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: EHD, FD, Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00082	KPRL4JDS	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 3X, for JD, JDB, HJD, JDC

OEM part number	KPRL4JDS	A	S41, S52, S53, S42, S54 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for JD, JDB, HJD, JDC 2-/3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S41 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single	A	S52 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	JD, JDB, HJD, JDC	A	S41 p. 24 Table 37; oem_spec
	JD, JDB, HJD, JDC 2-/3-pole	A	S52, S53, S42, S54 s1 pp.32-33; oem_spec

Poles	2, 3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
	Space required 3X (4.13 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: JD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00083 **KPRL4JDT** Cutler-Hammer branch-connector-kit **LISTED IN BOTH 2017 AN**

PRL4 breaker connector kit, twin-mount 3X, for JD, JDB, HJD, JDC

OEM part number	KPRL4JDT	A	S41, S52, S53, S42, S54 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for JD, JDB, HJD, JDC 2-/3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S41 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Twin; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	JD, JDB, HJD, JDC	A	S41 p. 24 Table 37; oem_spec
	JD, JDB, HJD, JDC 2-/3-pole	A	S52, S53, S42, S54 s1 pp.32-33; oem_spec
Poles	2, 3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
	Space required 3X (4.13 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
install_constraint	36.00 in minimum box width	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: JD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00084	KPRL4KDS	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 4X, for DK, KD, KDB, HKD, KDC

OEM part number	KPRL4KDS	A	S41, S52, S53, S42, S54 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	UPC 782114795996	A	S44 alias; spec sheet; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for DK, KD, KDB, HKD, KDC 2-/3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S41 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	DK, KD, KDB, HKD, KDC	A	S41 p. 24 Table 37; oem_spec
	DK, KD, KDB, HKD, KDC 2-/3-pole	A	S52, S53, S42, S54 s1 pp.32-33; oem_spec
Poles	2, 3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	Spec sheet: 25.5 in L x 9.3 in W x 3.2 in H, 9.25 lb; occupies 5.50 in (4X)	A	S44, S41 spec sheet; p. 24; oem_spec
	Space required 4X (5.50 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Aftermarket / reproduction	Sold as surplus/reconditioned on eBay titled 'POW-R-LINE C' single-mount kit 400A 3P	C	S49 surplus_listing
Cross-links	Families: PRL4, PRL4X · Breakers: KD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00085	KPRL4KDT	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, twin-mount 4X, for DK, KD, KDB, HKD, KDC

OEM part number	KPRL4KDT	A	S41, S52, S53, S42, S54 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	UPC 782114796412	A	S45 alias; spec sheet; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for DK, KD, KDB, HKD, KDC 2-/3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S41 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference

Installation location	Mounting: Twin; 44 in box required	A	S52 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	DK, KD, KDB, HKD, KDC	A	S41 p. 24 Table 37; oem_spec
	DK, KD, KDB, HKD, KDC 2-/3-pole	A	S52, S53, S42, S54 s1 pp.32-33; oem_spec
Poles	2, 3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Finish / plating	Spec sheet weight 9.85 lb; certification UL 67	B	S45 spec sheet; oem_spec
Dimensions	Occupies 5.50 in (139.7 mm) = 4X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
	Space required 4X (5.50 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
install_constraint	44.00 in box width required	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: KD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00088	KPRL4LAP	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 6X, for LA-P

OEM part number	KPRL4LAP	A	S41, S52, S53, S42 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for LA-P 3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S41 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LA-P	A	S41 p. 24 Table 37; oem_spec
	LA-P 3-pole	A	S52, S53, S42 s1 pp.32-33; oem_spec
Poles	2, 3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec

	Space required 6X (8.25 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
install_constraint	36.00 in minimum box width	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Tri-Pac		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00104	KPRL4LC	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 6X, LC/LCY/HLC/LD/HLD/LDC/LDB [LA]

OEM part number	KPRL4LC	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4LD (earlier number for same frames/space; supersession inferred)	C	S41, S42 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; also 100% rated CLD/CHLD/CLDC and LCC/HLCC (density-rated bus required for 100%)	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box (44 in for 100% rated)	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; 100%: CLD/CHLD/CLDC, LCC/HLCC	A	S42 pp. 32-33; oem_spec
	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; also 100% rated CLD/CHLD/CLDC and LCC/HLCC (density-rated bus required for 100%)	A	S52 s1 pp.32-33; oem_spec
Poles	3	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	8.25 in (209.6 mm) = 6X; single mounting	A	S42 pp. 32-33; oem_spec
	Space required 6X (8.25 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: LA, LC, LD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00087	KPRL4LCL	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 6X, for LCL

OEM part number	KPRL4LCL	A	S41, S52, S53, S42 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for LCL 3-pole	A	S52 pp.32-33; oem_spec

Application	branch	A	S41 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LCL	A	S41 p. 24 Table 37; oem_spec
	LCL 3-pole	A	S52, S53, S42 s1 pp.32-33; oem_spec
Poles	2, 3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
	Space required 6X (8.25 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
install_constraint	36.00 in minimum box width	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00089	KPRL4LD	Cutler-Hammer	branch-connector-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit, single-mount 6X, for LD, LDB, HLD, LDC, CLD, LC

OEM part number	KPRL4LD	A	S41, S53, S42, S54 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4LC (Same breaker frames/space listed under KPRL4LC in May 2022 RP01400001E while KPRL4LD is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for LD, LDB, HLD, LDC, CLD, LC 2-/3-pole, 600 A	A	S53, S42 oem_spec
Application	branch	A	S41 p. 24; oem_spec
Installation location	Mounting: Single; 36 in min box	A	S53 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LD, LDB, HLD, LDC, CLD, LC	A	S41 p. 24 Table 37; oem_spec
	LD, LDB, HLD, LDC, CLD, LC 2-/3-pole, 600 A	A	S53, S42, S54 s2 p.28; oem_spec
Poles	2, 3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S53 p.28; oem_spec

Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
	6X space (1X = 1.38 in)	A	S53 p.28; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S52, S53, S42 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4LC)	C	S41, S42 inference
Replacement / successor	KPRL4LC covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S52 inference
install_constraint	36.00 in minimum box width	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4 · Breakers: LC, LD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00105	KPRL4LG	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 4X, LHH

OEM part number	KPRL4LG	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for LHH 3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	LHH	A	S42 pp. 32-33; oem_spec
	LHH 3-pole	A	S52 s1 pp.32-33; oem_spec
Poles	3	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	5.50 in (139.7 mm) = 4X; single mounting	A	S42 pp. 32-33; oem_spec
	Space required 4X (5.50 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00090	KPRL4MC	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4 breaker connector kit, single-mount 6X, for MDL, HMDL

OEM part number	KPRL4MC	A	S41, S52, S53, S42 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X34 (Same breaker frames/space listed under KPRL4X34 in May 2022 RP01400001E while KPRL4MC is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference

Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for MDS/MC/MCY/HMC [MA/HMA]; 100% MCC/HMCC, MDSC	A	S52 pp.32-33; oem_spec
Application	branch	A	S41 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	MDL, HMDL	A	S41 p. 24 Table 37; oem_spec
	MDS/MC/MCY/HMC [MA/HMA]; 100% MCC/HMCC, MDSC	A	S52, S53, S42 s1 pp.32-33; oem_spec
Poles	2, 3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
	Space required 6X (8.25 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X34)	C	S41, S42 inference
install_constraint	36.00 in minimum box width	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: MA, MDL		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00107	KPRL4MD	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 6X, CMDL/CHMDL (100% rated

OEM part number	KPRL4MD	A	S42, S52, S54 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for 100% rated CMDL/CHMDL 3-pole (2021); 3-pole M-frame 800 A (2011)	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 44 in box; density-rated bus required	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	CMDL/CHMDL (100% rated; density rated bus)	A	S42 pp. 32-33; oem_spec
	100% rated CMDL/CHMDL 3-pole (2021); 3-pole M-frame 800 A (2011)	A	S52, S54 s1 pp.32-33; oem_spec
Poles	3	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above

	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	8.25 in (209.6 mm) = 6X; single mounting	A	S42 pp. 32-33; oem_spec
	Space required 6X (8.25 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: MA, MDL		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*2011 supplement lists KPRL4MD as standard 3-pole M-frame 800 A kit; 2021 lists it only for 100% rated CMDL/CHMDL (MDL/HMDL now KPRL4X34).*		

EDH-EAT-00091 KPRL4NBP Cutler-Hammer branch-connector-kit LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 6X, for NB-P

OEM part number	KPRL4NBP	A	S41, S52, S53, S42 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for NB-P 3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S41 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	NB-P	A	S41 p. 24 Table 37; oem_spec
	NB-P 3-pole	A	S52, S53, S42 s1 pp.32-33; oem_spec
Poles	2, 3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
	Space required 6X (8.25 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
install_constraint	44.00 in box width required	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Tri-Pac		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00106 KPRL4NC Cutler-Hammer branch-connector-kit CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 6X, NC/NCY/HNC [NB/HNB]

OEM part number	KPRL4NC	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for NC/NCY/HNC [NB/HNB] 3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	NC/NCY/HNC [NB/HNB]	A	S42 pp. 32-33; oem_spec
	NC/NCY/HNC [NB/HNB] 3-pole	A	S52 s1 pp.32-33; oem_spec
Poles	3	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	8.25 in (209.6 mm) = 6X; single mounting	A	S42 pp. 32-33; oem_spec
	Space required 6X (8.25 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: NB, NC		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00093 KPRL4ND Cutler-Hammer branch-connector-kit LISTED AS STOCK RENEWA

PRL4 breaker connector kit, single-mount 6X, for ND, HND

OEM part number	KPRL4ND	A	S41, S52, S53, S42, S54 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X35 (Same breaker frames/space listed under KPRL4X35 in May 2022 RP01400001E while KPRL4ND is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
	PRL4 breaker connector kit for NHH 3-pole (2021); ND/HND 2-/3-pole (2009/2011)	A	S52 pp.32-33; oem_spec
Application	branch	A	S41 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	ND, HND	A	S41 p. 24 Table 37; oem_spec
	NHH 3-pole (2021); ND/HND 2-/3-pole (2009/2011)	A	S52, S53, S42, S54 s1 pp.32-33; oem_spec
Poles	2, 3	A	S41 p. 24 Table 37; oem_spec
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec

	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
	Space required 6X (8.25 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X35)	C	S41, S42 inference
install_constraint	36.00 in minimum box width	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: NB, ND		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00113	KPRL4W11X	Cutler-Hammer	branch-connector-kit	LISTED 2017 AND 2022

PRL4F fusible switch connector kit 11X (600 A)

OEM part number	KPRL4W11X	A	S41, S42, S52, S53, S54 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S41 p. 25; oem_spec
	PRL4F fusible switch connector kit for FDPW326R/FDPW366R 600 A and FDPW327/FDPW367 800 A (800 A: 44 in box)	A	S52, S53, S42, S54 oem_spec
Application	branch	A	S41 p. 25; oem_spec
Breaker compatibility	600 A FDPW326R/FDPW366R and 800 A FDPW327/FDPW367 (44 in box)	A	S41 p. 25 Table 38; oem_spec
	FDPW326R/FDPW366R 600 A and FDPW327/FDPW367 800 A (800 A: 44 in box) (three-pole switch, not included)	A	S52, S53, S42, S54 oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S52 oem_spec
Dimensions	11X switch height	A	S41 p. 25; oem_spec
	Switch space 11X (15.13 in)	A	S52 oem_spec
Status	listed 2017 and 2022	A	S41, S42 oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.34; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00114	KPRL4W15X	Cutler-Hammer	branch-connector-kit	LISTED 2017 AND 2022

PRL4F fusible switch connector kit 15X (1200 A)

OEM part number	KPRL4W15X	A	S41, S42, S52, S53, S54 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S41 p. 25; oem_spec
	PRL4F fusible switch connector kit for FDPW328 / FDPW368 1200 A; 44 in box required	A	S52, S53, S42, S54 oem_spec
Application	branch	A	S41 p. 25; oem_spec
Breaker compatibility	1200 A FDPW328/FDPW368 (44 in box)	A	S41 p. 25 Table 38; oem_spec
	FDPW328 / FDPW368 1200 A; 44 in box required (three-pole switch, not included)	A	S52, S53, S42, S54 oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S52 oem_spec
Dimensions	15X switch height	A	S41 p. 25; oem_spec
	Switch space 15X (20.63 in)	A	S52 oem_spec
Status	listed 2017 and 2022	A	S41, S42 oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.34; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00112	KPRL4W9X	Cutler-Hammer	branch-connector-kit	LISTED 2017 AND 2022

PRL4F fusible switch connector kit 9X (400 A)

OEM part number	KPRL4W9X	A	S41, S42, S52, S53, S54 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S41 p. 25; oem_spec
	PRL4F fusible switch connector kit for FDPW325R / FDPW365R 400 A	A	S52, S53, S42, S54 oem_spec
Application	branch	A	S41 p. 25; oem_spec
Breaker compatibility	400 A FDPW325R/FDPW365R	A	S41 p. 25 Table 38; oem_spec
	FDPW325R / FDPW365R 400 A (three-pole switch, not included)	A	S52, S53, S42, S54 oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S52 oem_spec
Dimensions	9X switch height	A	S41 p. 25; oem_spec
	Switch space 9X (12.38 in)	A	S52 oem_spec
Status	listed 2017 and 2022	A	S41, S42 oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.34; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00094	KPRL4X12	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC (PD2)

OEM part number	KPRL4X12	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4FD1 (earlier number for same frames/space; supersession inferred)	C	S41, S42 supersedes; 2017 Table 37 vs 2022 Table 47; inference

Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for PDG2 1-pole (two sets of twin-mounted 1-pole); EHD/FDB/FD/HFD/FDC 1-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Twin	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	EHD/FDB/FD/HFD/FDC (PD2)	A	S42 pp. 32-33; oem_spec
	PDG2 1-pole (two sets of twin-mounted 1-pole); EHD/FDB/FD/HFD/FDC 1-pole	A	S52 s1 pp.32-33; oem_spec
Poles	1 (two sets of twin-mounted single-pole)	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	2.75 in (69.9 mm) = 2X; twin mounting	A	S42 pp. 32-33; oem_spec
	Space required 2X (2.75 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: EHD, FD, Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00095	KPRL4X22	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (PD2)

OEM part number	KPRL4X22	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4FD2 (earlier number for same frames/space; supersession inferred)	C	S41, S42 supersedes; 2017 Table 37 vs 2022 Table 47; inference
	KPRL4ED2 [supersedes] (earlier number for same frames/space; supersession inferred)	C	same as above
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for PDG2 2-pole; EHD/FDB/FD/HFD/FDC/ED/EDH/EDC 2-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Twin	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (PD2)	A	S42 pp. 32-33; oem_spec
	PDG2 2-pole; EHD/FDB/FD/HFD/FDC/ED/EDH/EDC 2-pole	A	S52 s1 pp.32-33; oem_spec
Poles	2	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	2.75 in (69.9 mm) = 2X; twin mounting	A	S42 pp. 32-33; oem_spec

	Space required 2X (2.75 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: EHD, FD, ED, Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00096	**KPRL4X32**	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, twin-mount 3X, ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDCE (PD2)

OEM part number	KPRL4X32	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4FD (earlier number for same frames/space; supersession inferred)	C	S41, S42 supersedes; 2017 Table 37 vs 2022 Table 47; inference
	KPRL4ED [supersedes] (earlier number for same frames/space; supersession inferred)	C	same as above
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for PDG2 3-pole; ED/EDH/EDC/FDE/HFDE/FDCE and ED/EDH/EDC/EDB/EDS 3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Twin	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDCE (PD2)	A	S42 pp. 32-33; oem_spec
	PDG2 3-pole; ED/EDH/EDC/FDE/HFDE/FDCE and ED/EDH/EDC/EDB/EDS 3-pole	A	S52 s1 pp.32-33; oem_spec
Poles	3	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	4.13 in (104.9 mm) = 3X; twin mounting	A	S42 pp. 32-33; oem_spec
	Space required 3X (4.13 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: EHD, FD, ED, Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00097	**KPRL4X334S**	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 4X, PD3 400 A frame

OEM part number	KPRL4X334S	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for PDG3 400 A frame, 3-pole, single mounting	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec

	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PD3 400 A frame	A	S42 pp. 32-33; oem_spec
	PDG3 400 A frame, 3-pole, single mounting	A	S52 s1 pp.32-33; oem_spec
Poles	3	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	5.50 in (139.7 mm) = 4X; single mounting	A	S42 pp. 32-33; oem_spec
	Space required 4X (5.50 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00098	KPRL4X334T	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, twin-mount 4X, PD3 400 A frame

OEM part number	KPRL4X334T	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for PDG3 400 A frame, 3-pole, twin mounting	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Twin; 44 in box required	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PD3 400 A frame	A	S42 pp. 32-33; oem_spec
	PDG3 400 A frame, 3-pole, twin mounting	A	S52 s1 pp.32-33; oem_spec
Poles	3	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	5.50 in (139.7 mm) = 4X; twin mounting	A	S42 pp. 32-33; oem_spec
	Space required 4X (5.50 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00099	KPRL4X336	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 4X, PD3 600 A frame

OEM part number	KPRL4X336	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for PDG3 600 A frame; LGE/LGS/LGH/LGC/LGU, 3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PD3 600 A frame; LGE/LGS/LGH/LGC/LGU	A	S42 pp. 32-33; oem_spec
	PDG3 600 A frame; LGE/LGS/LGH/LGC/LGU, 3-pole	A	S52 s1 pp.32-33; oem_spec
Poles	3	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	5.50 in (139.7 mm) per Table 46 (Table 47 prints 8.25 in / 6X for LG frames) = 4X; single mounting	A	S42 pp. 32-33; oem_spec
	Space required 4X (PDG3) / 6X (LG) per table (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		
Open question	*Table 46 gives 4X for PDG3 600 A but Table 47 gives 6X for LG-frame with the same kit number - confirm space requirement.*		

EDH-EAT-00100	KPRL4X34	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 6X, PD4

OEM part number	KPRL4X34	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4MC (earlier number for same frames/space; supersession inferred)	C	S41, S42 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for PDG4; MDL/HMDL 3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PD4; MDL/HMDL	A	S42 pp. 32-33; oem_spec
	PDG4; MDL/HMDL 3-pole	A	S52 s1 pp.32-33; oem_spec

Poles	3	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	8.25 in (209.6 mm) = 6X; single mounting	A	S42 pp. 32-33; oem_spec
	Space required 6X (8.25 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: MA, MDL, Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00101	KPRL4X35	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 6X, PD5

OEM part number	KPRL4X35	A	S42, S52 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4ND (earlier number for same frames/space; supersession inferred)	C	S41, S42 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
	PRL4 breaker connector kit for PDG5; ND/HND/NDC/NGS/NGH/NGC 3-pole	A	S52 pp.32-33; oem_spec
Application	branch	A	S42 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S52 inference
Installation location	Mounting: Single; 36 in min box	A	S52 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PD5; ND/HND/NDC/NGS/NGH/NGC	A	S42 pp. 32-33; oem_spec
	PDG5; ND/HND/NDC/NGS/NGH/NGC 3-pole	A	S52 s1 pp.32-33; oem_spec
Poles	3	A	S42 pp. 32-33; oem_spec
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S52 pp.32-33; oem_spec
Dimensions	8.25 in (209.6 mm) = 6X; single mounting	A	S42 pp. 32-33; oem_spec
	Space required 6X (8.25 in) (1X = 1.38 in)	A	S52 pp.32-33; oem_spec
Status	current (May 2022)	A	S42 p. 33; oem_spec
	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: NB, ND, Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00359	**6572C746G01**	PRL4 standard ground bus	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00359 **6572C746G01** Cutler-Hammer ground-bar **LISTED AS STOCK RENEWA**

PRL4 standard ground bus

OEM part number	6572C746G01	**A**	S52, S53 s1 p.33; oem_spec
Description	Copper bus with (3) 6-300 kcmil lugs plus a 24-circuit terminal bar with #14-1/0 wire range	**A**	same as above
Material	Copper	**A**	S52 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S52 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00415	**6574C74**	PRL4 vented cover assembly (side rails + top/bottom vented covers)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00415 **6574C74** Cutler-Hammer deadfront **LISTED AS STOCK RENEWA**

PRL4 vented cover assembly (side rails + top/bottom vented covers)

OEM part number	6574C74	**A**	S52, S53 s1 p.31 Table 44; oem_spec
Alternate / superseded numbers	BX2457 G02; BX2473 G03; BX2490 G04; BX3673/BX4473 G05; BX3690/BX4490 G06	**A**	S52 style_number; p.31; oem_spec
Description	Vented cover assembly: two side rails, top and bottom vented covers; device covers and blanks ordered separately; covers add 0.90 in to 10.40 in box depth (11.30 in overall)	**A**	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00411	**6554C01**	PRL4/PRL4X blank cover for 24 in wide box (1X-20X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00412	**6554C02**	PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00413	**P41X25**	PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)	—	Distributor-listed

EDH-EAT-00411	6554C01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL4/PRL4X blank cover for 24 in wide box (1X-20X)

OEM part number	6554C01	A	S52, S53, S54 s1 p.32 Table 45; s4 p.8 Table 13; oem_spec
Alternate / superseded numbers	1X H01; 2X H02; 3X H03; 4X H13; 5X H14; 6X H04; 7X H05; 9X H06; 10X H07; 11X H08; 12X H09; 13X H10; 15X H11; 20X H12	A	S52, S54 style_number; oem_spec
Description	Blank cover for unused chassis space, 24 in wide box	A	S52 oem_spec
Dimensions	Width 17 in; height 1X = 1 3/8 in ... 20X = 27 1/2 in	A	S54 p.8 Table 13; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.32; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00412	6554C02	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)

OEM part number	6554C02	A	S52, S53, S54 s1 p.32 Table 45; s4 p.8 Table 14; oem_spec
Alternate / superseded numbers	Same H scheme as 6554C01 (4X = H13, 5X = H14)	A	S52, S54 style_number; oem_spec
Description	Blank cover, 36.00 and 44.00 in wide boxes	A	S52 oem_spec
Dimensions	Width 25 in; height in X units (1X = 1.38 in)	A	S54 p.8 Table 14; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S52 p.32; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00413	P41X25	Cutler-Hammer	filler-plate	DISTRIBUTOR-LISTED

PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)

OEM part number	P41X25	A	S62 oem_spec
Description	SWBD/PRL4 1X filler 1.375 in H x 25 in W, fits 36, 44, 45 in enclosures ('Eaton, PRL4- 1X Blank Cover')	C	S62 distributor
Dimensions	1.375 in H x 25 in W	C	same as above
Status	Distributor-listed	C	same as above
Cross-links	Families: PRL4		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Relationship between P41X25 and OEM renewal part 6554C02H01 (both 1X, 25 in wide) - possibly switchboard-channel catalog equivalent; not confirmed.*		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00447	**1A32258H03**	Standard trim lock for PRL4X and PRL4 lighting and power panels	—	Listed in renewal parts guide(s) s1, s2, s4

EDH-EAT-00447	1A32258H03	Eaton	trim	LISTED IN RENEWAL PART

Standard trim lock for PRL4X and PRL4 lighting and power panels

OEM part number	1A32258H03	A	S52, S53, S54 oem_spec
Description	Standard trim lock for PRL4X and PRL4 lighting and power panels	A	same as above
Status	Listed in renewal parts guide(s) s1, s2, s4	A	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00456	**5081A08G02**	PRL4 chassis mounting hardware	—	Listed in s4
EDH-EAT-00457	**5081A09G02**	PRL4 gutter cover mounting hardware	—	Listed in s4

EDH-EAT-00456 **5081A08G02** Cutler-Hammer fastener **LISTED IN S4**

PRL4 chassis mounting hardware

OEM part number	5081A08G02	A	S54 oem_spec
Description	PRL4 chassis mounting hardware (nuts and washers)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00457 **5081A09G02** Cutler-Hammer fastener **LISTED IN S4**

PRL4 gutter cover mounting hardware

OEM part number	5081A09G02	A	S54 oem_spec
Description	PRL4 gutter cover mounting hardware (screws and captive nuts)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.18 PRL4X — Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)

FAM-EAT-023 · panelboard · aka PRL4x, Pow-R-Line 4X, PRL4DX, Pow-R-Xpress PRL4X · markings: Eaton

Successor to PRL4B; renewal parts (blank covers, vented covers, KPRL4X/KPRL4* connector kits, retrofit kits) are listed jointly for PRL4X and PRL4 in RP01400001E (2021).

Attribute	Value	Cl.	Sources
Status	Current	A	S56 oem_spec
Era of manufacture	Introduced 2020	A	S52 p.2; oem_spec
Voltage rating	240, 480 or 600 Vac; 600 Vdc	A	S56 p.V2-T3-11; oem_spec
Main ampacity	MLO 1200 A; main device 1200 A	A	same as above
Branch breakers accepted	Breakers 15-1200 A (Power Defense PDG2-PDG5 plus legacy Series C/G frames via KPRL4 kits); fusible switches 30-1200 A (PRL4F)	A	S52, S56 oem_spec

Breaker families associated: Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3), Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH

Key documents: S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S56 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control

Also fits this family (entry printed elsewhere): KPRL4FBP, KPRL4JDS, KPRL4JDT, KPRL4KDS, KPRL4KDT, KPRL4CKD, KPRL4LCL, KPRL4LAP, KPRL4MC, KPRL4NBP, KPRL4CND, KPRL4ND, KPRL4X12, KPRL4X22, KPRL4X32, KPRL4X334S, KPRL4X334T, KPRL4X336, KPRL4X34, KPRL4X35, KPRL4FDCL, KPRL4CA, KPRL4LC, KPRL4LG, KPRL4NC, KPRL4MD, KPRL44X, KPRL45X1, KPRL4B6XS, KPRL4B6XT, KPRL4W9X, KPRL4W11X, KPRL4W15X, 6572C746G01, 6554C01, 6554C02, 6574C74, KPRL45X, KPRL45XS, 1A32258H03

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00414	**PRXP4PD2FILL1**	Pow-R-Xpress PRL4X PD2 1-pole filler	—	Distributor-listed (UPC 786689814915)

EDH-EAT-00414 **PRXP4PD2FILL1** Eaton filler-plate **DISTRIBUTOR-LISTED (UP**

Pow-R-Xpress PRL4X PD2 1-pole filler

OEM part number	PRXP4PD2FILL1	A	S61 oem_spec
Description	PRL4X PD2 1 pole filler (Pow-R-Xpress unassembled PRL4X panelboard)	C	S61 distributor
Poles	1	C	same as above
Status	Distributor-listed (UPC 786689814915)	C	same as above
Cross-links	Families: PRL4X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.19 PRL5P — Pow-R-Line 5P plug-on distribution panelboard

FAM-EAT-025 · panelboard · aka 5P, Pow-R-Line 5P · markings: Cutler-Hammer, Eaton

Plug-on distribution panelboard with single-bus (30 in box) or double-bus (48 in box) chassis; breakers supplied as complete adapter units (catalog 5P...).

Attribute	Value	Cl.	Sources
Status	Discontinued (dropped from 2021 renewal parts; in 2009 and 2017 editions)	B	S52, S53, S42 inference
Era of manufacture	Introduced August 1995	A	S53 p.2 Table 1; oem_spec
Main ampacity	Up to 1200 A (lug units 400/600/800 A single bus, 1200 A double bus)	A	S53 p.38; oem_spec
Branch breakers accepted	Plug-on adapter units with EHD..FDC, ED, JD, DK/KD, LD, MDL, ND (no 100% rated)	A	S53 p.37; oem_spec

Breaker families associated: EHD, MA, NB

Key documents: S42 RP01400001E Renewal Parts RP01400001E — Pow-R-Line Xpert and legacy panelboards; S52 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S53 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00421	**5PLUG31200TC**	PRL5P 600-1200 A lug unit, double-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition
EDH-EAT-00418	**5PLUG3400SC**	PRL5P 400 A main/through-feed lug unit, single-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition
EDH-EAT-00419	**5PLUG3600SC**	PRL5P 600 A lug unit, single-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition
EDH-EAT-00420	**5PLUG3800SC**	PRL5P 800 A lug unit, single-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition

EDH-EAT-00421 — 5PLUG31200TC — Cutler-Hammer — main-lug-kit — LISTED 2009 AND 2017;

PRL5P 600-1200 A lug unit, double-bus chassis

OEM part number	5PLUG31200TC	A	S53, S42 s2 p.38 Table 47; oem_spec
Description	600-1200 A lug unit, double-bus chassis	A	S53 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (4) #4-750 kcmil	A	same as above
Dimensions	7X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00418 — 5PLUG3400SC — Cutler-Hammer — main-lug-kit — LISTED 2009 AND 2017;

PRL5P 400 A main/through-feed lug unit, single-bus chassis

OEM part number	5PLUG3400SC	A	S53, S42 s2 p.38 Table 47; oem_spec
Description	400 A main/through-feed lug unit, single-bus chassis	A	S53 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (1) 1/0-500 or (2) 1/0-250 kcmil	A	same as above
Dimensions	8X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00419	5PLUG3600SC	Cutler-Hammer	main-lug-kit	LISTED 2009 AND 2017;

PRL5P 600 A lug unit, single-bus chassis

OEM part number	5PLUG3600SC	A	S53, S42 s2 p.38 Table 47; oem_spec
Description	600 A lug unit, single-bus chassis	A	S53 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (2) 1/0-500 kcmil	A	same as above
Dimensions	8X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00420	5PLUG3800SC	Cutler-Hammer	main-lug-kit	LISTED 2009 AND 2017;

PRL5P 800 A lug unit, single-bus chassis

OEM part number	5PLUG3800SC	A	S53, S42 s2 p.38 Table 47; oem_spec
Description	800 A lug unit, single-bus chassis	A	S53 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (2) #2-500 or (3) #2-400 kcmil	A	same as above
Dimensions	8X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S52, S53, S42 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00424	**5PN1200A**	PRL5P 1200 A neutral assembly, Al/Cu	—	PRL5P dropped from 2021 edition
EDH-EAT-00425	**5PN1200C**	PRL5P 1200 A neutral assembly, copper	—	PRL5P dropped from 2021 edition
EDH-EAT-00422	**5PN800A**	PRL5P 800 A neutral assembly, Al/Cu, (4) 250-500 kcmil	—	PRL5P dropped from 2021 edition
EDH-EAT-00423	**5PN800C**	PRL5P 800 A neutral assembly, copper, (4) 250-500 kcmil	—	PRL5P dropped from 2021 edition

EDH-EAT-00424	5PN1200A	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 1200 A neutral assembly, Al/Cu

OEM part number	5PN1200A	A	S53 p.39 Table 48; oem_spec
Description	1200 A neutral assembly, Al/Cu	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00425	5PN1200C	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 1200 A neutral assembly, copper

OEM part number	5PN1200C	A	S53 p.39 Table 48; oem_spec
Description	1200 A neutral assembly, copper	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00422	5PN800A	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 800 A neutral assembly, Al/Cu, (4) 250-500 kcmil

OEM part number	5PN800A	A	S53 p.39 Table 48; oem_spec
Description	800 A neutral assembly, Al/Cu, (4) 250-500 kcmil	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00423	5PN800C	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 800 A neutral assembly, copper, (4) 250-500 kcmil

OEM part number	5PN800C	A	S53 p.39 Table 48; oem_spec
Description	800 A neutral assembly, copper, (4) 250-500 kcmil	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00426	**5PG1200A**	PRL5P 1200 A ground bar, Al/Cu	—	PRL5P dropped from 2021 edition
EDH-EAT-00427	**5PG1200C**	PRL5P 1200 A ground bar, copper	—	PRL5P dropped from 2021 edition

EDH-EAT-00426	5PG1200A	Cutler-Hammer	ground-bar	PRL5P DROPPED FROM 202

PRL5P 1200 A ground bar, Al/Cu

OEM part number	5PG1200A	A	S53 p.39 Table 48; oem_spec
Description	1200 A ground bar, Al/Cu	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00427	5PG1200C	Cutler-Hammer	ground-bar	PRL5P DROPPED FROM 202

PRL5P 1200 A ground bar, copper

OEM part number	5PG1200C	A	S53 p.39 Table 48; oem_spec
Description	1200 A ground bar, copper	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00428	**5PFP1S**	PRL5P 1X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00429	**5PFP1T**	PRL5P 1X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00430	**5PFP2S**	PRL5P 2X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00431	**5PFP2T**	PRL5P 2X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00432	**5PFP3S**	PRL5P 3X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00433	**5PFP3T**	PRL5P 3X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00434	**5PFP4S**	PRL5P 4X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00435	**5PFP4T**	PRL5P 4X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00436	**5PFP5S**	PRL5P 5X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00437	**5PFP5T**	PRL5P 5X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00438	**5PFP6S**	PRL5P 6X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00439	**5PFP6T**	PRL5P 6X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition

EDH-EAT-00428 5PFP1S Cutler-Hammer filler-plate PRL5P DROPPED FROM 202

PRL5P 1X deadfront filler plate, single-bus chassis

OEM part number	5PFP1S	A	S53 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 1X vertical increment, single-bus chassis	A	S53 p.40; oem_spec
Dimensions	1X height (1X = 1.38 in)	A	S53 oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00429 5PFP1T Cutler-Hammer filler-plate PRL5P DROPPED FROM 202

PRL5P 1X deadfront filler plate, double-bus chassis

OEM part number	5PFP1T	A	S53 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 1X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S53 p.40; oem_spec
Dimensions	1X height (1X = 1.38 in)	A	S53 oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00430 5PFP2S Cutler-Hammer filler-plate PRL5P DROPPED FROM 202

PRL5P 2X deadfront filler plate, single-bus chassis

OEM part number	5PFP2S	A	S53 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 2X vertical increment, single-bus chassis	A	S53 p.40; oem_spec
Dimensions	2X height (1X = 1.38 in)	A	S53 oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00431	5PFP2T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 2X deadfront filler plate, double-bus chassis

OEM part number	5PFP2T	A	S53 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 2X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S53 p.40; oem_spec
Dimensions	2X height (1X = 1.38 in)	A	S53 oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00432	5PFP3S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 3X deadfront filler plate, single-bus chassis

OEM part number	5PFP3S	A	S53 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 3X vertical increment, single-bus chassis	A	S53 p.40; oem_spec
Dimensions	3X height (1X = 1.38 in)	A	S53 oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00433	5PFP3T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 3X deadfront filler plate, double-bus chassis

OEM part number	5PFP3T	A	S53 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 3X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S53 p.40; oem_spec
Dimensions	3X height (1X = 1.38 in)	A	S53 oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00434	5PFP4S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 4X deadfront filler plate, single-bus chassis

OEM part number	5PFP4S	A	S53 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 4X vertical increment, single-bus chassis	A	S53 p.40; oem_spec
Dimensions	4X height (1X = 1.38 in)	A	S53 oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00435	5PFP4T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 4X deadfront filler plate, double-bus chassis

OEM part number	5PFP4T	A	S53 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 4X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S53 p.40; oem_spec
Dimensions	4X height (1X = 1.38 in)	A	S53 oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00436	5PFP5S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 5X deadfront filler plate, single-bus chassis

OEM part number	5PFP5S	A	S53 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 5X vertical increment, single-bus chassis	A	S53 p.40; oem_spec
Dimensions	5X height (1X = 1.38 in)	A	S53 oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00437	5PFP5T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 5X deadfront filler plate, double-bus chassis

OEM part number	5PFP5T	A	S53 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 5X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S53 p.40; oem_spec
Dimensions	5X height (1X = 1.38 in)	A	S53 oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00438	5PFP6S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 6X deadfront filler plate, single-bus chassis

OEM part number	5PFP6S	A	S53 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 6X vertical increment, single-bus chassis	A	S53 p.40; oem_spec
Dimensions	6X height (1X = 1.38 in)	A	S53 oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00439	5PFP6T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 6X deadfront filler plate, double-bus chassis

OEM part number	5PFP6T	A	S53 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 6X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S53 p.40; oem_spec
Dimensions	6X height (1X = 1.38 in)	A	S53 oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00442	**5PCGBLD600S**	PRL5P grounded B-phase adapter kit, 600 A LD main breaker, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00445	**5PCGBLUG1200T**	PRL5P grounded B-phase adapter kit, 1200 A main lugs, double bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00440	**5PCGBLUG400S**	PRL5P grounded B-phase adapter kit, 400 A main lugs, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00441	**5PCGBLUG600S**	PRL5P grounded B-phase adapter kit, 600 A main lugs, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00443	**5PCGBLUG800S**	PRL5P grounded B-phase adapter kit, 800 A main lugs, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00444	**5PCGBMD800T**	PRL5P grounded B-phase adapter kit, 800 A MD main breaker, double bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00446	**5PCGBND1200T**	PRL5P grounded B-phase adapter kit, 1200 A ND main breaker, double bus	—	PRL5P dropped from 2021 edition

EDH-EAT-00442	5PCGBLD600S	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 600 A LD main breaker, single bus

OEM part number	5PCGBLD600S	A	S53 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 600 A LD main breaker, single bus	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00445	5PCGBLUG1200T	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 1200 A main lugs, double bus

OEM part number	5PCGBLUG1200T	A	S53 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 1200 A main lugs, double bus	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00440	5PCGBLUG400S	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 400 A main lugs, single bus

OEM part number	5PCGBLUG400S	A	S53 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 400 A main lugs, single bus	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00441	5PCGBLUG600S	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 600 A main lugs, single bus

OEM part number	5PCGBLUG600S	A	S53 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 600 A main lugs, single bus	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00443	5PCGBLUG800S	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 800 A main lugs, single bus

OEM part number	5PCGBLUG800S	A	S53 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 800 A main lugs, single bus	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00444	5PCGBMD800T	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 800 A MD main breaker, double bus

OEM part number	5PCGBMD800T	A	S53 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 800 A MD main breaker, double bus	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00446	5PCGBND1200T	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 1200 A ND main breaker, double bus

OEM part number	5PCGBND1200T	A	S53 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 1200 A ND main breaker, double bus	A	S53 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S52, S53 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.20 WEB — Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards

FAM-EAT-011 · panelboard · aka WEB, WCA, WEHB, WFB, HWFB, WGB, WGHB · markings: Westinghouse

Westinghouse 1937-1988 era panelboards named for their branch breaker (E-frame, CA, F-frame, G-frame). PRL3 connector kits (KPRL3FD, KPRL3ED, KPRL3CA) fit WEB, WCA, WEHB, WFB and HWFB.

Attribute	Value	Cl.	Sources
Status	discontinued; replacement panelboard type PRL3a (WGB/WGHB -> PRL2a)	A	S38 p. V12-T4-7; oem_spec
Branch breakers accepted	WEB: EB (-> EB, EHD); WEHB: EHB; WFB: FB (-> FB, FDB); WCA: CA; WGB: GB; WGHB: GHB	A	same as above
kit_fit	The PRL3 connector kits will fit the following panelboards: WEB, WCA, WEHB, WFB, and HWFB	A	S39 p. 7 note; oem_spec

Breaker families associated: EB, EHB, FB, HFB

Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S39 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD

Also fits this family (entry printed elsewhere): KPRL3FD, KPRL3ED, KPRL3CA

3.21 ES — Cutler-Hammer Type ES switchboard

FAM-EAT-003 · switchboard · aka ES switchboard, Type ES · markings: Cutler-Hammer

Cutler-Hammer branded service distribution switchboard using Westinghouse molded-case breakers under the 1960s supply agreement. Existing ES lineups can be extended with new Pow-R-Line C structures through a transition section.

Attribute	Value	Cl.	Sources
Status	discontinued (Vol 12 lists as legacy; new PRLC can connect via transition section)	A	S38 p. V12-T15-5; oem_spec
Era of manufacture	Introduced 1991 by Cutler-Hammer as replacement for their version of WF/WRP; Mullenbach (1962) heritage; used exclusively Westinghouse MCCBs	A	same as above
Voltage rating	120-600 V	A	same as above
Main ampacity	ES switchboard bus 600-4000 A; devices 15-4000 A; 10-200 kA	A	same as above

Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions

3.22 IFS — Integrated Facility System switchboard

FAM-EAT-006 · switchboard · aka Integrated Facility Switchboard, IFS switchboard · markings: Eaton

Free-standing front-access UL 891 switchboard that integrates standard panelboards, dry-type transformers and other equipment in 'cells'; used with Type 1 Pow-R-Line C switchboard sections.

Attribute	Value	Cl.	Sources
Status	current (2018 consulting guide)	A	S43 p. 21.6-1; oem_spec
relationship	Used with Type 1 Pow-R-Line C switchboard sections; mains/feeders selected from Section 21.1 (PRLC)	A	same as above

Key documents: S43 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21)

3.23 PRLC — Pow-R-Line C switchboard

FAM-EAT-001 · switchboard · aka Pow-R-Line C, POW-R-LINE C, PRL-C, Pow-R-Line C switchboard, Type 1 Pow-R-Line C · markings: Westinghouse, Cutler-Hammer, Eaton

Eaton (originally Westinghouse) Class II service-distribution switchboard, UL 891 / NEMA PB-2, front- or rear-access, with individually mounted mains and group-mounted feeder chassis. Evolved from the Westinghouse WF/WRP St. Louis switchboard when the design moved to Sumter SC and Visalia CA in 1988 with the introduction of Series C breakers. Distribution chassis are laid out in X units (1X = 1-3/8 in) on 38X or 50X vertical panel space in 36 in or 45 in wide structures; device X requirements (EHD 1-3X, FD 2-3X, JD 3X, KD 4X, LD/MDL/ND 6X) parallel the PRL4 panelboard chassis. Vol 12 states breaker provisions 'are available for all ratings of the Pow-R-Line C designs including all parts required to complete the cell', but no PRLC-specific provision kit catalog numbers were found in public documents (factory/Sumter quoted).

Attribute	Value	Cl.	Sources
Status	current (listed in April 2018 consulting guide)	A	S43 p. 21.0-8; oem_spec
Era of manufacture	Introduced late 1980s (1988) by Westinghouse as successor to WF/WRP; built in Sumter SC and Visalia CA; current Eaton product	A	S38 p. V12-T15-5 (Chronology); oem_spec

Attribute	Value	Cl.	Sources
Voltage rating	240-480-600 Vac, 250 Vdc (2018 guide); 208-600 V (Vol 12 rating table)	A	S43, S38 p. 21.0-9 Table 21.0-2; p. V12-T15-5; oem_spec
Main ampacity	Mains 400-6000 A; switchboard bus 600-6000 A (Vol 12)	A	same as above
Branch breakers accepted	Group-mounted feeders: bolt-on molded case breakers 15-1200 A (Table 21.0-2 lists bolt-on fixed MCCB 15-2500 A), drawout MCCB 70-1200 A, fusible switches 30-1200 A. Uses Series C MCCBs (EHD, FD/HFD/FDC, ED, JD, DK/KD/HKD/KDC, LD/HLD/LDC, MDL/HMDL, NG/ND, LG, etc.)	A	S43 pp. 21.0-8, 21.0-9, 21.1-12 Fig 21.1-9; oem_spec
x_unit	1X = 1-3/8 in (34.9 mm) in PRLC distribution layout	A	S43 p. 21.1-12 Fig 21.1-9; oem_spec
distribution_chassis	Distribution sections use 38X or 50X vertical panel space for devices (90 in high structures), widths 36 or 45 in	A	S43 p. 21.1-11 Fig 21.1-7; oem_spec
device_x_space	Fig 21.1-9 (36 in structure): EHD 100 A 1P 1X / 2P 2X / 3P 3X; FDB/FD/HFD/FDC 150 A 1-3P 1-3X; EDB/EDS/ED/EDH/EDC & FD/HFD/FDC 225 A 2P 2X 3P 3X; JD/HJD/JDC 250 A 3X; DK/KD/HKD/KDC/CKD/CHKD 400 A 4X; ELKD earth leakage 4X; LGE/LGH/LGC/LGU 600 A 4X; LD/HLD/LDC/CLD 600 A 6X; FB-P 3X; NHH/LA-P 6X; MDL/HMDL/CMDL 800 A 6X; NG/NGH/NGC 1200 A 6X. 45 in structure: twin DK/KD/HKD/KDC 4X, NB-P 6X, NG 6X. Breaker-to-fusible transition 1X; SPD 7X or 10X; customer metering 11X	A	S43 p. 21.1-12 Fig 21.1-9; oem_spec
main_lug_space	Main lugs only: 400/600 A 10X (2-#2-500) or 16X on 50X chassis (2-#250-750); 800 A 10X/16X; 1200-2000 A 12X/16X (38X chassis values 10-12X)	A	S43 p. 21.1-11 Table 21.1-11; oem_spec
renewal_parts	Eaton offers match-and-lineup PRLC structures, new breakers, breaker provisions/connectors 'available for all ratings of the Pow-R-Line C designs including all parts required to complete the cell', and switchboard structure parts	A	S38 p. V12-T15-5; oem_spec
bus_torque	Pow-R-Line CS (Canadian derivative) manual gives busbar torque #10 30 lb-in, 1/4 in 65, 5/16 in 130, 3/8 in 240, 1/2 in 600 lb-in; 70 lb-ft when two Belleville washers per bolt. Not verified for PRLC (IM01500001E not obtained)	C	S47 p. 17 Appendix A Table 2; oem_spec
branch_kit_relationship_to_prl4	A surplus listing titles the PRL4 connector kit KPRL4KDS as 'Pow-R-Line C'; the PRLC distribution X-space table matches PRL4 kit space requirements. Not OEM-confirmed that PRL4 KPRL4 kits are listed for PRLC switchboard chassis	D	S49, S43, S41 inference

Breaker families associated: ED, EHD, FD, JD, KD, LD, MDL, ND, RD
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S41 RP01400001E (2017) Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, ; S43 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21); S47 IB015002EN Eaton Pow-R-Line CS switchboards instruction manual; S49 eBay listing: EATON KPRL4KDS POW-R-LINE C einzelne Montage Panelboard Stecker Kit 400A 3P; S51 Surplus Record listing: Westinghouse Pow-R-Line C 4000 A 240 V 3PH3W 2-section switchboard

3.24 PRLCS — Pow-R-Line CS switchboard

FAM-EAT-005 · switchboard · aka Pow-R-Line CS, PRL CS · markings: Eaton
Eaton Canada switchboard line documented by instruction manual IB015002EN (Nov 2021). Manual gives bus-joint torque table (Appendix A). No branch kit catalog numbers found.

Attribute	Value	Cl.	Sources
Status	current (Canadian market; manual IB015002EN effective Nov 2021)	B	S47 cover; oem_spec
bus_torque	Busbar connections: #10 30 lb-in; 1/4 in 65 lb-in; 5/16 in 130 lb-in; 3/8 in 240 lb-in; 1/2 in 600 lb-in; with two Belleville washers per bolt (convex side up) torque to 70 lb-ft	A	S47 p. 17 Appendix A Table 2; oem_spec

Key documents: S47 IB015002EN Eaton Pow-R-Line CS switchboards instruction manual

3.25 PRLi — Pow-R-Line i switchboard

FAM-EAT-004 · switchboard · aka Pow-R-Line i, PRL i, Pow-R-Line I · markings: Cutler-Hammer, Eaton

Rear-access, front- and rear-aligned UL 891 switchboard with individually compartmentalized feeder devices (not group-mounted). Included here for lineage; branch hardware is device-specific compartments rather than group-mounted connector kits.

Attribute	Value	Cl.	Sources
Status	current (2018 consulting guide)	A	S43 p. 21.0-11; oem_spec
Era of manufacture	Evolved in 1991 from Asheville 'Pow-R-I' (itself from WRI); built in Sumter SC	A	S38 p. V12-T15-2; oem_spec
Main ampacity	4000 A main bus maximum	A	S43 p. 21.0-11; oem_spec
Branch breakers accepted	Individually compartmentalized feeders: MCCB 15-1200 A compartmentalized, fusible switches 100-1200 A, Magnum SB/DS, NRX	A	same as above

Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S43 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21)

3.26 WF/WRP — Westinghouse WF/WRP switchboard

FAM-EAT-002 · switchboard · aka WF, WRP, Type WF, Type WRP, WF/WRP switchboard · markings: Westinghouse

Westinghouse St. Louis Class II switchboard. Type WF = front access (rear flush), Type WRP = rear access (front and rear flush). Feeders were panel-mounted molded-case breakers or FDP fusible switches — the same device family used in CDP/FDP panelboards. Eaton's Sumter aftermarket center offers 'retrofit kits for WF and WRP distribution sections' and 'connector kits for WF and WRP distribution sections' (RP01400002E p.20), and Vol 12 says provisions/connectors are available for most ratings of WF/WRP; no catalog numbers published.

Attribute	Value	Cl.	Sources
Status	discontinued (superseded by Pow-R-Line C)	A	S38 p. V12-T15-5; oem_spec
Era of manufacture	Introduced 1955 by Westinghouse, St. Louis MO; design transferred 1988 to Sumter SC and Visalia CA as Pow-R-Line C	A	same as above
Successor	Pow-R-Line C switchboard (new PRLC match/lineup structures can connect to existing WF/WRP)	A	same as above
Voltage rating	120-600 V	A	S38 p. V12-T15-5 ratings table; oem_spec
Main ampacity	Switchboard bus 600-4000 A; protective devices 15-4000 A; 10-200 kA	A	S38 p. V12-T15-5; oem_spec
Branch breakers accepted	Group (panel)-mounted molded-case breakers or FDP fusible switches as feeders; mains DS, SPB, bolted pressure switch (CBC) or MCCB	A	S38 pp. V12-T15-2, V12-T15-5; oem_spec
Aftermarket / reproduction	Sumter Plant Aftermarket Center offers retrofit kits and connector kits for WF and WRP distribution sections	A	S39 p. 20; oem_spec

Breaker families associated: FB, RD

Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S39 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00028	**KFDP4XT**	FDP fusible switch connector kit 4X (30, 60)	Three-pole switch: 30, 60 A (240/600 V) and 100 A (240 V) FDPWT twin s A	Listed Feb 2013
EDH-EAT-00029	**KFDP5XT**	FDP fusible switch connector kit 5X (100 A)	Three-pole switch: 100 A 600 V FDPWT3633R A	Listed Feb 2013
EDH-EAT-00030	**KFDPB6X-2**	FDP fusible switch connector kit 6X (200 A)	Three-pole switch: 200 A FDPBS324R (240 V), FDPBS364R (600 V) A	Listed Feb 2013
EDH-EAT-00032	**KFDPW11X-6**	FDP fusible switch connector kit 11X (600 A)	Three-pole switch: 600 A FDPW326R (240 V), FDPW366R (600 V) A	Listed Feb 2013
EDH-EAT-00033	**KFDPW11X-8**	FDP fusible switch connector kit 11X (800 A)	Three-pole switch: 800 A FDPW367 (table prints 'FDPW36' for 600 V colu A	Listed Feb 2013

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00034	**KFDPW15X-12**	FDP fusible switch connector kit 15X (1200 A)	Three-pole switch: 1200 A FDPW368 **A**	Listed Feb 2013
EDH-EAT-00031	**KFDPW9X-4**	FDP fusible switch connector kit 9X (400 A)	Three-pole switch: 400 A FDPW325R (240 V), FDPW365R (600 V) **A**	Listed Feb 2013

EDH-EAT-00028	KFDP4XT	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013

FDP fusible switch connector kit 4X (30, 60)

OEM part number	KFDP4XT	**A**	S39, S40, S55 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	**A**	S39 p. 18; oem_spec
	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPWT 30-30, 60-60, 100-100 A (240 V) / 30-30, 60-60 A (600 V) twin switch	**A**	S55 p.18; oem_spec
Application	branch	**A**	S39 p. 18; oem_spec
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	**A**	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 30, 60 A (240/600 V) and 100 A (240 V) FDPWT twin switches: FDPWT3211R, FDPWT3611R, FDPWT3222R, FDPWT3622R, FDPWT3233R	**A**	S39 p. 18 Table 21; oem_spec
	FDPWT 30-30, 60-60, 100-100 A (240 V) / 30-30, 60-60 A (600 V) twin switch; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	**A**	S55 pp.17-18; oem_spec
Poles	3	**A**	S39 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	**A**	S55 p.18; oem_spec
Dimensions	Occupies 5.50 in (139.7 mm) = 4X	**A**	S39 p. 18 Table 21; oem_spec
	4X space	**A**	S55 oem_spec
Status	Listed Feb 2013	**A**	same as above
	listed 2013	**B**	S39, S40 p. 18; oem_spec
Cross-links	Families: WF/WRP, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00029	KFDP5XT	Cutler-Hammer	branch-connector-kit	LISTED FEB 2013

FDP fusible switch connector kit 5X (100 A)

OEM part number	KFDP5XT	**A**	S39, S40, S55 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	**A**	S39 p. 18; oem_spec
	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPWT3633R 600 V 100-100 A twin switch	**A**	S55 p.18; oem_spec
Application	branch	**A**	S39 p. 18; oem_spec
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	**A**	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 100 A 600 V FDPWT3633R	**A**	S39 p. 18 Table 21; oem_spec
	FDPWT3633R 600 V 100-100 A twin switch; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	**A**	S55 pp.17-18; oem_spec
Poles	3	**A**	S39 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	**A**	S55 p.18; oem_spec
Dimensions	Occupies 6.88 in (174.8 mm) = 5X	**A**	S39 p. 18 Table 21; oem_spec
	5X space	**A**	S55 oem_spec

Status	Listed Feb 2013	A	same as above
	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: WF/WRP, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00030 **KFDPB6X-2** Cutler-Hammer branch-connector-kit **LISTED FEB 2013**

FDP fusible switch connector kit 6X (200 A)

OEM part number	KFDPB6X-2	A	S39, S40, S55 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S39 p. 18; oem_spec
	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPBS324R / FDPBS364R 200 A switch	A	S55 p.18; oem_spec
Application	branch	A	S39 p. 18; oem_spec
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 200 A FDPBS324R (240 V), FDPBS364R (600 V)	A	S39 p. 18 Table 21; oem_spec
	FDPBS324R / FDPBS364R 200 A switch; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S55 pp.17-18; oem_spec
Poles	3	A	S39 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S55 p.18; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X	A	S39 p. 18 Table 21; oem_spec
	6X space	A	S55 oem_spec
Status	Listed Feb 2013	A	same as above
	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: WF/WRP, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00032 **KFDPW11X-6** Cutler-Hammer branch-connector-kit **LISTED FEB 2013**

FDP fusible switch connector kit 11X (600 A)

OEM part number	KFDPW11X-6	A	S39, S40, S55 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S39 p. 18; oem_spec
	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW326R / FDPW366R 600 A	A	S55 p.18; oem_spec
Application	branch	A	S39 p. 18; oem_spec
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 600 A FDPW326R (240 V), FDPW366R (600 V)	A	S39 p. 18 Table 21; oem_spec
	FDPW326R / FDPW366R 600 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S55 pp.17-18; oem_spec
Poles	3	A	S39 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S55 p.18; oem_spec
Dimensions	Occupies 15.13 in (384.3 mm) = 11X	A	S39 p. 18 Table 21; oem_spec

	11X space	A	S55 oem_spec
Status	Listed Feb 2013	A	same as above
	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: WF/WRP, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00033 **KFDPW11X-8** Cutler-Hammer branch-connector-kit **LISTED FEB 2013**

FDP fusible switch connector kit 11X (800 A)

OEM part number	KFDPW11X-8	A	S39, S40, S55 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S39 p. 18; oem_spec
	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW367 800 A	A	S55 p.18; oem_spec
Application	branch	A	S39 p. 18; oem_spec
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 800 A FDPW367 (table prints 'FDPW36' for 600 V column, apparent truncation)	A	S39 p. 18 Table 21; oem_spec
	FDPW367 800 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S55 pp.17-18; oem_spec
Poles	3	A	S39 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S55 p.18; oem_spec
Dimensions	Occupies 15.13 in (384.3 mm) = 11X	A	S39 p. 18 Table 21; oem_spec
	11X space	A	S55 oem_spec
Status	Listed Feb 2013	A	same as above
	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: WF/WRP, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00034 **KFDPW15X-12** Cutler-Hammer branch-connector-kit **LISTED FEB 2013**

FDP fusible switch connector kit 15X (1200 A)

OEM part number	KFDPW15X-12	A	S39, S40, S55 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S39 p. 18; oem_spec
	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW368 1200 A	A	S55 p.18; oem_spec
Application	branch	A	S39 p. 18; oem_spec
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 1200 A FDPW368	A	S39 p. 18 Table 21; oem_spec
	FDPW368 1200 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S55 pp.17-18; oem_spec
Poles	3	A	S39 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S55 p.18; oem_spec

Dimensions	Occupies 20.63 in (524.0 mm) = 15X	A	S39 p. 18 Table 21; oem_spec
	15X space	A	S55 oem_spec
Status	Listed Feb 2013	A	same as above
	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: WF/WRP, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00031 **KFDPW9X-4** Cutler-Hammer branch-connector-kit **LISTED FEB 2013**

FDP fusible switch connector kit 9X (400 A)

OEM part number	KFDPW9X-4	A	S39, S40, S55 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S39 p. 18; oem_spec
	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW325R / FDPW365R 400 A	A	S55 p.18; oem_spec
Application	branch	A	S39 p. 18; oem_spec
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 400 A FDPW325R (240 V), FDPW365R (600 V)	A	S39 p. 18 Table 21; oem_spec
	FDPW325R / FDPW365R 400 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S55 pp.17-18; oem_spec
Poles	3	A	S39 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S55 p.18; oem_spec
Dimensions	Occupies 12.38 in (314.5 mm) = 9X	A	S39 p. 18 Table 21; oem_spec
	9X space	A	S55 oem_spec
Status	Listed Feb 2013	A	same as above
	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: WF/WRP, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

4 Square D / Schneider Electric

Lineage / brand markings: Square D, Schneider Electric, Federal Pioneer (Canada)

Family	Type	Status	Era	Entries	Pg
I-LINE I-Line Circuit Breaker Panelboard / I-Line distribution section	panelboard	current	Catalog copyright 1998-2019	37	225
QMB QMB Fusible Panelboard / QMB distribution (current design, Series E1)	panelboard	current	Catalog 4620CT9601 copyright 1985-2015; current design post-October 1984 (older QM/QW interiors pre-1984)	124	235
QMB-LEGACY Legacy QMB distribution (pre-October-1984 QM and QW interiors)	panelboard	obsolete; old-design blank fillers obsolete with no replacement	QM (31 in. wide box) and QW (38 in. wide box) interiors built before October 1984; pre-1961 interiors (incl. round bus bar) have no replacement switches	22	282
QED-2 Power-Style QED-2 Switchboard	switchboard	current (2700CT1101 v02 dated 2025-12 listed on se.com; OEM interiors catalog 2700CT1601 v1.3 2023-01)	Catalog 2700CT1101 copyright 1995-2012; 'connect to existing' list names generations QED-2/S, QED-2 Series 2, QED-3, QED-4	145	289
SPEED-D Speed-D Merchandised Service Section Switchboard	switchboard	unknown	In 2700CT1101 (2012)	54	294

4.1 I-LINE — I-Line Circuit Breaker Panelboard / I-Line distribution section

FAM-SQD-004 · panelboard · aka I Line, ILine, HCP, HCP-SU, HCR-U, HCW, HCM, HCJ, HCN, Class 2110 · markings: Square D

Plug-on I-Line bus stack: breaker line-end jaws are integral to the breaker, shrouded in a molded insulator that keys into slots in the bus support base, are factory lubricated/preset and are 'blow-on'. The load end is held by an integral mounting bracket/foot screwed to the interior pan. The same interiors, fillers and extensions are used in QED switchboard I-Line distribution sections.

Attribute	Value	Cl.	Sources
Status	current	A	S64 oem_spec
Era of manufacture	Catalog copyright 1998-2019	A	S64 p. 6; oem_spec
Voltage rating	Up to 600 Vac; AC or DC systems	A	S64 pp. 2, 8; oem_spec
Branch breakers accepted	I-Line plug-on breakers 15-1200 A frames: FA, FH, BD/BG/BJ/BK, HD/HG/HJ/HL/HR, QB/QD/QG/QJ, JD/JG/JJ/JL/JR, LA/LH, LD/LG/LJ/LL/LR, MG/MJ, PG/PJ/PK/PL, RG/RJ/RK/RL	A	S64 pp. 8-11; oem_spec
qed_compat	I-Line panelboard fillers and extensions are the same for current I-Line distribution sections in QED switchboards	A	S73 oem_spec
Mounting	15-1200 A breakers require only a screwdriver; firmly attached to bus stack and mechanically attached to interior; load-end mounting bracket is integral to each breaker	A	S64 p. 6; oem_spec

Breaker families associated: FA / FH (I-Line), H-frame HD/HG/HJ/HL/HR (I-Line), I-Limiter FI / KI / LI (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line), LA / LH (I-Line), M-frame MG/MJ (I-Line), P-frame PG/PJ/PK/PL (I-Line), PowerPact B-frame BD/BG/BJ/BK (I-Line), PowerPact L-frame LD/LG/LJ/LL/LR (I-Line), Q-frame QB/QD/QG/QJ (I-Line), R-frame RG/RJ/RK/RL (I-Line)

Key documents: S64 2110CT9701R07/19 I-Line Circuit Breaker Panelboards Catalog, Class 2110; S66 80030-695-02 I-Line (HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation; S73 FA108059 FAQ FA108059: Do the blank filler plates and extensions for I-Line panelboards fit the QED

Also fits this family (entry printed elsewhere): AL150HD, AL175JD, AL250JD, AL400LA, CU150HD, CU250JD, CU400LA, CF20R63C, CF25R63C, CF20RJ63C, CF30RJ63C, CF16RJ63C36

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00152	**S33930**	I-Line plug-on sub-feed lug kit S33930	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ0 **B**	unknown
EDH-SQD-00153	**SL100**	I-Line plug-on sub-feed lug kit SL100	—	unknown
EDH-SQD-00149	**SL1200P5**	I-Line plug-on sub-feed lug kit SL1200P5	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ0 **B**	unknown
EDH-SQD-00150	**SL1200P6**	I-Line plug-on sub-feed lug kit SL1200P6	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ0 **B**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00151	**SL1200P7**	I-Line plug-on sub-feed lug kit SL1200P7	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ0 **B**	unknown
EDH-SQD-00146	**SL250**	I-Line plug-on sub-feed lug kit SL250	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ0 **B**	unknown
EDH-SQD-00147	**SL400**	I-Line plug-on sub-feed lug kit SL400	Distributor: for HCP/HCP-SU/HCR-U panelboards; LA/LH frame space **C**	unknown
EDH-SQD-00154	**SL800**	I-Line plug-on sub-feed lug kit SL800	—	unknown
EDH-SQD-00148	**SL800M5**	I-Line plug-on sub-feed lug kit SL800M5	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ0 **B**	unknown

EDH-SQD-00152 S33930 Square D sub-feed-lug-kit STATUS UNKNOWN

I-Line plug-on sub-feed lug kit S33930

OEM part number	S33930	**A**	S64 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 1200 A (100% rated, for R-frame applications), terminal wire range (4) 3/0-600 kcmil Al/Cu	**A**	S64 p. 10; oem_spec
Application	sub-feed for 100% rated ('R' frame) applications; also listed on HCR-U interior page	**A**	S64 pp. 10, 21; oem_spec
Installation location	I-Line branch mounting space	**B**	S64, S93 oem_spec
Breaker compatibility	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	**B**	S87 oem_spec
Current rating	1200 A (100% rated, for R-frame applications)	**A**	S64 p. 10; oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

EDH-SQD-00153 SL100 Square D sub-feed-lug-kit STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL100

OEM part number	SL100 (Listed in FAQ FAQ000269509 (via search summary); not in 2019 catalog table)	**B**	S87 oem_spec
Current rating	100 A	**C**	S87 inference
Cross-links	Families: I-LINE		
Not yet documented	Status, wire range		

EDH-SQD-00149 SL1200P5 Square D sub-feed-lug-kit STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL1200P5

OEM part number	SL1200P5	**A**	S64 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 1200 A, terminal wire range (4) 3/0 AWG-500 kcmil	**A**	S64 p. 10; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	**A**	S64, S87 oem_spec
Installation location	I-Line branch mounting space	**B**	S64, S93 oem_spec
Breaker compatibility	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	**B**	S87 oem_spec
Current rating	1200 A	**A**	S64 p. 10; oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

EDH-SQD-00150	SL1200P6	Square D	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL1200P6

OEM part number	SL1200P6	A	S64 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 1200 A, terminal wire range (3) 350-600 kcmil	A	S64 p. 10; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S64, S87 oem_spec
Installation location	I-Line branch mounting space	B	S64, S93 oem_spec
Breaker compatibility	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S87 oem_spec
Current rating	1200 A	A	S64 p. 10; oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

EDH-SQD-00151	SL1200P7	Square D	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL1200P7

OEM part number	SL1200P7	A	S64 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 1200 A, terminal wire range (3) 3/0 AWG-750 kcmil (750 kcmil compact Al only)	A	S64 p. 10; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S64, S87 oem_spec
Installation location	I-Line branch mounting space	B	S64, S93 oem_spec
Breaker compatibility	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S87 oem_spec
Current rating	1200 A	A	S64 p. 10; oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

EDH-SQD-00146	SL250	Square D	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL250

OEM part number	SL250	A	S64 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 250 A, terminal wire range (1) #4-300 kcmil Al/Cu	A	S64 p. 10; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S64, S87 oem_spec
Installation location	I-Line branch mounting space	B	S64, S93 oem_spec
Breaker compatibility	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S87 oem_spec
Current rating	250 A	A	S64 p. 10; oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

EDH-SQD-00147	SL400	Square D	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL400

OEM part number	SL400	A	S64 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 400 A, terminal wire range (1) #1-600 kcmil or (2) #1-250 kcmil Al/Cu	A	S64 p. 10; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S64, S87 oem_spec
Installation location	I-Line branch mounting space	B	S64, S93 oem_spec
Breaker compatibility	Distributor: for HCP/HCP-SU/HCR-U panelboards; LA/LH frame space	C	S93 distributor
Current rating	400 A	A	S64 p. 10; oem_spec
Dimensions	Occupies 6 in. of mounting space	C	S93 distributor
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

EDH-SQD-00154	SL800	Square D	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL800

OEM part number	SL800 (Listed in FAQ FAQ000269509 (via search summary); 2019 catalog lists SL800M5 only - SL800 may be predecessor)	B	S87 oem_spec
Current rating	800 A	C	S87 inference
Cross-links	Families: I-LINE		
Not yet documented	relation to SL800M5, Status, wire range		

EDH-SQD-00148	SL800M5	Square D	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL800M5

OEM part number	SL800M5	A	S64 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 800 A, terminal wire range (3) 3/0 AWG-500 kcmil	A	S64 p. 10; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S64, S87 oem_spec
Installation location	I-Line branch mounting space	B	S64, S93 oem_spec
Breaker compatibility	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S87 oem_spec
Current rating	800 A	A	S64 p. 10; oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00156	**PK32DGTA**	Equipment ground bar kit PK32DGTA (I-Line)	—	unknown

EDH-SQD-00156	PK32DGTA	Square D	ground-bar	STATUS UNKNOWN

Equipment ground bar kit PK32DGTA (I-Line)

OEM part number	PK32DGTA	A	S64 p. 7; oem_spec
Description	Equipment ground bar mounted in panelboard box (available Cu or Al)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	material of this specific number, terminals		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00159	**4051749901**	I-Line deadfront (trim) support bracket 4051749901	HCN-style I-Line panelboard (HCN3254-2); QED applicability unknown **A**	unknown

EDH-SQD-00159	4051749901	Square D	mounting-bracket	STATUS UNKNOWN

I-Line deadfront (trim) support bracket 4051749901

OEM part number	4051749901	**A**	S79 oem_spec
Description	Single trim support bracket, deadfront bracket for I-Line HCN3254-2 panelboard	**A**	same as above
Breaker compatibility	HCN-style I-Line panelboard (HCN3254-2); QED applicability unknown	**A**	same as above
Cross-links	Families: I-LINE		
Requires	8011417101 (EDH-SQD-00160)		
Not yet documented	Dimensions, other HCN sizes		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00139	**HLN1BL**	I-Line blank extension HLN1BL	All I-Line breaker applications except PowerPact H/J with Micrologic 5 **A**	current
EDH-SQD-00140	**HLN4BL**	I-Line blank extension HLN4BL	All I-Line breaker applications except PowerPact H/J with Micrologic 5 **A**	current
EDH-SQD-00141	**HLN4EBL**	I-Line blank extension HLN4EBL	PowerPact H/J with Micrologic 5/6 trip unit only **A**	current
EDH-SQD-00142	**HLW1BL**	I-Line blank extension HLW1BL	All I-Line breaker applications except PowerPact H/J with Micrologic 5 **A**	current
EDH-SQD-00143	**HLW4BL**	I-Line blank extension HLW4BL	All I-Line breaker applications except PowerPact H/J with Micrologic 5 **A**	current
EDH-SQD-00144	**HLW4EBL**	I-Line blank extension HLW4EBL	PowerPact H/J with Micrologic 5/6 trip unit only **A**	current
EDH-SQD-00137	**HNM1BL**	I-Line blank filler HNM1BL	any I-Line interior unused space **A**	current
EDH-SQD-00138	**HNM4BL**	I-Line blank filler HNM4BL	any I-Line interior unused space **A**	current

EDH-SQD-00139	HLN1BL	Square D	filler-plate	CURRENT

I-Line blank extension HLN1BL

OEM part number	HLN1BL	A	S70, S66 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80121-651-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S70 style_number; oem_spec
Description	Blank extension, narrow side, 1.5 in. (all applications except PowerPact H/J with Micrologic 5/6)	A	S70, S66 oem_spec
Application	blank extension (snaps onto mounting rail on underside of trim/deadfront; no screws)	A	S70 oem_spec
Installation location	Narrow side of I-Line interior deadfront	A	same as above
Breaker compatibility	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S66, S70 oem_spec
Dimensions	Covers 1.5 in. (38.1 mm) of breaker mounting height	A	S66 p. 2; oem_spec
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S66 oem_spec
Status	current	B	S70, S90 oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00140	HLN4BL	Square D	filler-plate	CURRENT

I-Line blank extension HLN4BL

OEM part number	HLN4BL	A	S70, S66 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80121-652-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S70 style_number; oem_spec
Description	Blank extension, narrow side, 4.5 in. (all except H/J with Micrologic 5/6)	A	S70, S66 oem_spec
Application	blank extension	A	S70 oem_spec
Installation location	Narrow side of I-Line interior deadfront	A	same as above
Breaker compatibility	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S66, S70 oem_spec
Dimensions	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S66 p. 2; oem_spec
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S66 oem_spec
Status	current	B	S70, S90 oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00141	HLN4EBL	Square D	filler-plate	CURRENT

I-Line blank extension HLN4EBL

OEM part number	HLN4EBL	A	S70, S66 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80121-752-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S70 style_number; oem_spec
Description	Blank extension, narrow side, 4.5 in., only for PowerPact H/J with Micrologic 5/6 trip unit	A	S70, S66 oem_spec
Application	blank extension added to end of H/J breaker	A	S70 oem_spec
Installation location	Narrow side of I-Line interior deadfront	A	same as above
Breaker compatibility	PowerPact H/J with Micrologic 5/6 trip unit only	A	S66, S70 oem_spec
Dimensions	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S66 p. 2; oem_spec
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S66 oem_spec
Status	current	B	S70, S90 oem_spec
Cross-links	Families: I-LINE, QED-2 · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00142	HLW1BL	Square D	filler-plate	CURRENT

I-Line blank extension HLW1BL

OEM part number	HLW1BL	A	S70, S66 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80034-187-02 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S70 style_number; oem_spec
Description	Blank extension, wide side, 1.5 in. (all except H/J with Micrologic 5/6)	A	S70, S66 oem_spec
Application	blank extension; also used on wide side of HCW panelboards; LI->KI swap needs (1) HLW4BL + HNM1BL + HLW1BL	A	S70, S72, S71 oem_spec
Installation location	Wide side of I-Line interior deadfront	A	S70 oem_spec
Breaker compatibility	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S66, S70 oem_spec
Kit contents	Kit of 3 per FA112712 and distributors (se.com product title says qty 5 - conflict)	C	S71, S90 distributor
Dimensions	Covers 1.5 in. (38.1 mm) of breaker mounting height	A	S66 p. 2; oem_spec
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S66 oem_spec
Status	current	B	S70, S90 oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00143	HLW4BL	Square D	filler-plate	CURRENT

I-Line blank extension HLW4BL

OEM part number	HLW4BL	A	S70, S66 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80034-188-03 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S70 style_number; oem_spec
Description	Blank extension, wide side, 4.5 in. (all except H/J with Micrologic 5/6)	A	S70, S66 oem_spec
Application	blank extension; also used on wide side of HCW panelboards; LI->KI swap needs (1) HLW4BL + HNM1BL + HLW1BL	A	S70, S72, S71 oem_spec
Installation location	Wide side of I-Line interior deadfront	A	S70 oem_spec
Breaker compatibility	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S66, S70 oem_spec
Kit contents	Qty 5 per distributors	C	S90 distributor
Dimensions	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S66 p. 2; oem_spec
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S66 oem_spec
Status	current	B	S70, S90 oem_spec
Identification features	Surface-mount plate approx. 6.35 in. W x 4.5 in. H	C	S90 distributor
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00144	HLW4EBL	Square D	filler-plate	CURRENT

I-Line blank extension HLW4EBL

OEM part number	HLW4EBL	A	S70, S66 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80121-653-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S70 style_number; oem_spec
Description	Blank extension, wide side, 4.5 in., only for PowerPact H/J with Micrologic 5/6 trip unit	A	S70, S66 oem_spec
Application	blank extension added to end of H/J breaker	A	S70 oem_spec
Installation location	Wide side of I-Line interior deadfront	A	same as above
Breaker compatibility	PowerPact H/J with Micrologic 5/6 trip unit only	A	S66, S70 oem_spec
Dimensions	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S66 p. 2; oem_spec
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S66 oem_spec
Status	current	B	S70, S90 oem_spec
Cross-links	Families: I-LINE, QED-2 · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00137	HNM1BL	Square D	filler-plate	CURRENT

I-Line blank filler HNM1BL

OEM part number	HNM1BL	A	S70, S64 s2 p. 7; oem_spec
Alternate / superseded numbers	40517-408-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S70 style_number; oem_spec
Description	Blank filler 1.5 in.	A	same as above
Application	blank filler (covers bus in unused breaker mounting space; screws to interior mounting pan with screws 21593-20100)	A	same as above
Installation location	On I-Line bus stack/mounting pan in unused space (single- and double-row interiors)	A	same as above
Breaker compatibility	any I-Line interior unused space	A	S66, S70 oem_spec
Kit contents	Kit of 3 (FA112712)	A	S71, S90 oem_spec
Dimensions	1.5 in. wide	A	S70 oem_spec
OEM instruction document	Secured with screws 21593-20100 to interior mounting pan (FA243887)	A	same as above
Status	current	B	S70, S90 oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00138	HNM4BL	Square D	filler-plate	CURRENT

I-Line blank filler HNM4BL

OEM part number	HNM4BL	A	S70, S64 s2 p. 7; oem_spec
Alternate / superseded numbers	40517-407-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S70 style_number; oem_spec
Description	Blank filler 4.5 in.	A	same as above
Application	blank filler (covers bus in unused breaker mounting space; screws to interior mounting pan)	A	same as above
Installation location	On I-Line bus stack/mounting pan in unused space (single- and double-row interiors)	A	same as above
Breaker compatibility	any I-Line interior unused space	A	S66, S70 oem_spec
Dimensions	4.5 in. wide	A	S70 oem_spec
OEM instruction document	Secured with screws 21593-20100 to interior mounting pan (FA243887)	A	same as above
Status	current	B	S70, S90 oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00158	**2152620361**	FA/FH I-Line breaker mounting bracket screw 2152620361	FA, FH I-Line A	unknown
EDH-SQD-00157	**21590-20241**	PowerPact H/J I-Line mounting bracket screw 21590-20241	PowerPact H- and J-frame I-Line breakers (mounting bracket/foot to int A	unknown
EDH-SQD-00145	**21593-20100**	I-Line blank filler mounting screw 21593-20100	—	unknown
EDH-SQD-00160	**8011417101**	Slotted Roberts-head screw 8011417101 for I-Line deadfront bracket	—	unknown
EDH-SQD-00161	**PKDFSCREW**	Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)	—	current (80025-067-01 obsolete)

EDH-SQD-00158	2152620361	Square D	fastener	STATUS UNKNOWN

FA/FH I-Line breaker mounting bracket screw 2152620361

OEM part number	2152620361	A	S76 oem_spec
Description	Mounting bracket (mounting foot) screw for FA or FH I-Line breaker	A	same as above
Breaker compatibility	FA, FH I-Line	A	same as above
Cross-links	Families: I-LINE, QED-2 · Breakers: FA / FH (I-Line)		
Not yet documented	length, thread		

EDH-SQD-00157	21590-20241	Square D	fastener	STATUS UNKNOWN

PowerPact H/J I-Line mounting bracket screw 21590-20241

OEM part number	21590-20241	A	S75 oem_spec
Description	Pan head steel thread-forming trilobe screw, combination slot / #3 square recess, ANSI B18.6.4, 1/4-20 x 0.75 in. (+.00/-.03)	A	same as above
Installation location	Load-end mounting bracket of I-Line breaker into interior mounting pan	A	S75, S64 oem_spec
Breaker compatibility	PowerPact H- and J-frame I-Line breakers (mounting bracket/foot to interior pan)	A	S75 oem_spec
Cross-links	Families: I-LINE, QED-2 · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Finish / plating		

EDH-SQD-00145	21593-20100	Square D	fastener	STATUS UNKNOWN

I-Line blank filler mounting screw 21593-20100

OEM part number	21593-20100	A	S70 oem_spec
Description	Screw securing HNM1BL/HNM4BL blank fillers to I-Line interior mounting pan	A	same as above
Application	accessory hardware	A	same as above
Cross-links	Families: I-LINE, QED-2		
Not yet documented	length, thread size		

EDH-SQD-00160	8011417101	Square D	fastener	STATUS UNKNOWN

Slotted Roberts-head screw 8011417101 for I-Line deadfront bracket

OEM part number	8011417101	A	S79 oem_spec
Description	Slotted Roberts (square) head screw used with trim support bracket 4051749901 on HCN3254-2	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	length, thread		

EDH-SQD-00161	PKDFSCREW	Square D	fastener	CURRENT (80025-067-01

Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)

OEM part number	PKDFSCREW	A	S84 oem_spec
Alternate / superseded numbers	80025-067-01 [supersedes] (Obsolete original deadfront screw)	A	same as above
Description	Deadfront screw used on NF, I-Line, NQ and QMB panels; PKDFSCREW is a kit of 8	A	same as above
Status	current (80025-067-01 obsolete)	A	same as above
Cross-links	Families: I-LINE, QMB		
Not yet documented	length, thread size		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00155	**HQO306**	Plug-on QO distribution panel HQO306 for I-Line	—	unknown

EDH-SQD-00155	HQO306	Square D	other	STATUS UNKNOWN

Plug-on QO distribution panel HQO306 for I-Line

OEM part number	HQO306	A	S64 p. 10; oem_spec
Description	Six-pole, 240 Vac max QO plug-on distribution panel that mounts in all I-Line panelboards; accepts QO, QO-H, QO-VH, QH and Qwik-Gard plug-on breakers through 30 A; max three GFI-suffix breakers	A	same as above
Application	branch (small-circuit adapter in I-Line space)	A	S64 oem_spec
Voltage rating	240 Vac max	A	same as above
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Dimensions, mounting height		
Open question	*Is HQO306 listed for QED-2 I-Line sections?*		

4.2 QMB — QMB Fusible Panelboard / QMB distribution (current design, Series E1)

FAM-SQD-003 · panelboard · aka QMB fusible, QMB-QMJ, Class 4620 · markings: Square D

Extruded-bus fusible distribution system used both as stand-alone panelboards and as the QMB distribution section of QED-2 / Speed-D switchboards. Branch units have permanently attached mounting brackets and blow-on plug-on jaws onto the QMB bus and mount with a screwdriver; glass-reinforced polyester bus supports. ISCR up to 200 kA at 600 Vac with Class R/J/L/T fuses.

Attribute	Value	Cl.	Sources
Status	current	A	S65 oem_spec
Era of manufacture	Catalog 4620CT9601 copyright 1985-2015; current design post-October 1984 (older QM/QW interiors pre-1984)	A	S65, S98 p. 1; oem_spec
Voltage rating	600 Vac / 250 Vdc max	A	S65 pp. 4, 7; oem_spec
Main ampacity	Main lug interiors 225-1200 A; main switch 200-800 A; QMJ only on 400, 600, 800, 1200 A interiors; QMB panelboards limited to 800 A main and branch switches (1200 A QMB368W only in QED-2)	A	S65, S63 pp. 6, 14; oem_spec
Branch breakers accepted	QMB twin and single fusible switch units 30-800 A (1200 A in QED-2 only), QMJ Class J switch units 30-600 A, QMB circuit breaker units (twin H-frame HD/HG 15-150 A; single JD/JG 150-250 A and LA/LH 225-400 A), NEMA size 0-3 motor starter units, QMB Surgelogic TVSS	A	S65 pp. 6, 7, 14, 17-19; oem_spec
standards	UL 67, UL 50, CSA C22.2 No. 29, NEMA PB 1, Fed Spec W-P115C; switch units UL 98 File E34358	A	S65 p. 4; oem_spec

Breaker families associated: QMB circuit breaker units (H-, J-, L-frame)
Key documents: S63 2700CT1101 Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switc; S65 4620CT9601R07/15 QMB Fusible Panelboards Catalog, Class 4620; S98 FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified) QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T
Also fits this family (entry printed elsewhere): 40251-287-50, QMB306EX, QMB306LEX, QMB310EX, QMB310LEX, QMB320EX, QMB3400LA, QMB3300LA, QMB362T, QMB364, QMB323TD, PKDFSCREW

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00081	**QMB12CLA**	QMB main lug compression adaptor kit QMB12CLA (1200 A)	—	unknown
EDH-SQD-00080	**QMB8CLA**	QMB main lug compression adaptor kit QMB8CLA (800 A)	—	unknown

EDH-SQD-00081	QMB12CLA	Square D	main-lug-kit	STATUS UNKNOWN

QMB main lug compression adaptor kit QMB12CLA (1200 A)

OEM part number	QMB12CLA	A	S65 Table 2, p. 6; oem_spec
Description	Adaptor kit for VCEL compression main lugs on 1200 A QMB main-lug interior (4 conductors/phase, VCEL050-12H1 2/0-500 or VCEL075-12H1 500-750 Al)	A	S65 Table 2; oem_spec
Application	main	A	S65 oem_spec
Current rating	1200 A	A	S65 Table 2; oem_spec
Cross-links	Families: QMB		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00080	QMB8CLA	Square D	main-lug-kit	STATUS UNKNOWN

QMB main lug compression adaptor kit QMB8CLA (800 A)

OEM part number	QMB8CLA	A	S65 Table 2, p. 6; oem_spec
Description	Adaptor kit for VCEL compression main lugs on 800 A QMB main-lug interior (3 conductors/phase, VCEL050-12H1 2/0-500 or VCEL075-12H1 500-750 Al)	A	S65 Table 2; oem_spec
Application	main	A	S65 oem_spec
Current rating	800 A	A	S65 Table 2; oem_spec
Cross-links	Families: QMB		
Not yet documented	Dimensions, Kit contents		

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00082	**AL150HD**	Standard aluminum mechanical lug kit AL150HD (HD/HG 15-150 A)	HD/HG 15-150 A **A**	unknown
EDH-SQD-00083	**AL175JD**	Standard aluminum mechanical lug kit AL175JD (JD/JG 150-175 A)	JD/JG 150-175 A **A**	unknown
EDH-SQD-00084	**AL250JD**	Standard aluminum mechanical lug kit AL250JD (JD/JG 200-250 A)	JD/JG 200-250 A **A**	unknown
EDH-SQD-00085	**AL400LA**	Standard aluminum mechanical lug kit AL400LA (LA 125-400 A)	LA 125-400 A **A**	unknown
EDH-SQD-00086	**CU150HD**	Optional copper mechanical lug kit CU150HD (HD/HG 15-150 A)	HD/HG 15-150 A **A**	unknown
EDH-SQD-00087	**CU250JD**	Optional copper mechanical lug kit CU250JD (JD/JG 150-250 A)	JD/JG 150-250 A **A**	unknown
EDH-SQD-00088	**CU400LA**	Optional copper mechanical lug kit CU400LA (LA 125-400 A)	LA 125-400 A **A**	unknown

EDH-SQD-00082	AL150HD	Square D	lug-kit	STATUS UNKNOWN

Standard aluminum mechanical lug kit AL150HD (HD/HG 15-150 A)

OEM part number	AL150HD	A	S65 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #14-3/0 Al/Cu	A	S65 p. 18; oem_spec
Application	load terminals of QMB circuit breaker units	A	same as above
Breaker compatibility	HD/HG 15-150 A	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Cross-links	Families: QMB, QED-2, I-LINE · Breakers: QMB circuit breaker units (H-, J-, L-frame), H-frame HD/HG/HJ/HL/HR (I-Line)		
Not yet documented	Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00083	AL175JD	Square D	lug-kit	STATUS UNKNOWN

Standard aluminum mechanical lug kit AL175JD (JD/JG 150-175 A)

OEM part number	AL175JD	A	S65 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #1/0-4/0 Al/Cu	A	S65 p. 18; oem_spec
Application	load terminals of QMB circuit breaker units	A	same as above
Breaker compatibility	JD/JG 150-175 A	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Cross-links	Families: QMB, QED-2, I-LINE · Breakers: QMB circuit breaker units (H-, J-, L-frame), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00084	AL250JD	Square D	lug-kit	STATUS UNKNOWN

Standard aluminum mechanical lug kit AL250JD (JD/JG 200-250 A)

OEM part number	AL250JD	A	S65 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #3/0-350 kcmil Al/Cu	A	S65 p. 18; oem_spec
Application	load terminals of QMB circuit breaker units	A	same as above
Breaker compatibility	JD/JG 200-250 A	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Cross-links	Families: QMB, QED-2, I-LINE · Breakers: QMB circuit breaker units (H-, J-, L-frame), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00085	AL400LA	Square D	lug-kit	STATUS UNKNOWN

Standard aluminum mechanical lug kit AL400LA (LA 125-400 A)

OEM part number	AL400LA	A	S65 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #1-600 or (2) #1-250 kcmil Al/Cu	A	S65 p. 18; oem_spec
Application	load terminals of QMB circuit breaker units	A	same as above
Breaker compatibility	LA 125-400 A	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Cross-links	Families: QMB, QED-2, I-LINE · Breakers: QMB circuit breaker units (H-, J-, L-frame), LA / LH (I-Line)		
Not yet documented	Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00086	CU150HD	Square D	lug-kit	STATUS UNKNOWN

Optional copper mechanical lug kit CU150HD (HD/HG 15-150 A)

OEM part number	CU150HD	A	S65 Tables 10/11, p. 18; oem_spec
Description	Optional copper mechanical lug kit; wire range (1) #14-2/0 Cu	A	S65 p. 18; oem_spec
Application	load terminals of QMB circuit breaker units	A	same as above
Breaker compatibility	HD/HG 15-150 A	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Cross-links	Families: QMB, QED-2, I-LINE · Breakers: QMB circuit breaker units (H-, J-, L-frame), H-frame HD/HG/HJ/HL/HR (I-Line)		
Not yet documented	Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00087	CU250JD	Square D	lug-kit	STATUS UNKNOWN

Optional copper mechanical lug kit CU250JD (JD/JG 150-250 A)

OEM part number	CU250JD	A	S65 Tables 10/11, p. 18; oem_spec
Description	Optional copper mechanical lug kit; wire range (1) #1/0-300 kcmil Cu	A	S65 p. 18; oem_spec
Application	load terminals of QMB circuit breaker units	A	same as above
Breaker compatibility	JD/JG 150-250 A	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Cross-links	Families: QMB, QED-2, I-LINE · Breakers: QMB circuit breaker units (H-, J-, L-frame), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00088	CU400LA	Square D	lug-kit	STATUS UNKNOWN

Optional copper mechanical lug kit CU400LA (LA 125-400 A)

OEM part number	CU400LA	A	S65 Tables 10/11, p. 18; oem_spec
Description	Optional copper mechanical lug kit; wire range (1) #1-600 or (2) #1-250 kcmil Cu	A	S65 p. 18; oem_spec
Application	load terminals of QMB circuit breaker units	A	same as above
Breaker compatibility	LA 125-400 A	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Cross-links	Families: QMB, QED-2, I-LINE · Breakers: QMB circuit breaker units (H-, J-, L-frame), LA / LH (I-Line)		
Not yet documented	Torque values, use on I-Line versions of same frames not stated in this source		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00063	**40251-016-51**	QMB/QMJ switch terminal lug 40251-016-51	30 A and 60 A QMB switch units (std) A	unknown
EDH-SQD-00065	**40251-018-50**	QMB/QMJ switch terminal lug 40251-018-50	100 A 600 V QMB units (QMB263TW/HW, QMB363TW/HW, 100 A side of QMB363T A	unknown
EDH-SQD-00124	**4025101851**	QMB363TW Series E1 renewal part: Lug assembly	QMB363TW, Series E1 (E01) A	unknown
EDH-SQD-00067	**40251-162-50**	QMB/QMJ switch terminal lug 40251-162-50	200 A QMB units (QMB224W, QMB324W, QMB264W, QMB364W) A	unknown
EDH-SQD-00066	**40256-014-50**	QMB/QMJ switch terminal lug 40256-014-50	100 A 600 V QMB units; QMJ363T/H A	unknown
EDH-SQD-00064	**40256-034-50**	QMB/QMJ switch terminal lug 40256-034-50	30 A and 60 A QMB units; QMJ361T, QMJ362T A	unknown
EDH-SQD-00070	**40256-039-50**	QMB/QMJ switch terminal lug 40256-039-50	QMJ365 (400 A) A	unknown
EDH-SQD-00068	**40560-270-50**	QMB/QMJ switch terminal lug 40560-270-50	200 A QMB units; QMJ364T/H A	unknown
EDH-SQD-00074	**VCEL02114S1**	VERSA-CRIMP compression lug VCEL02114S1	100 A 600 V QMB units; QMJ363 A	unknown
EDH-SQD-00071	**VCEL030516H1**	VERSA-CRIMP compression lug VCEL030516H1	200 A QMB units optional; 200 A QMB main switch interior (Table 3); QM A	unknown
EDH-SQD-00072	**VCEL05012H1**	VERSA-CRIMP compression lug VCEL05012H1	400-800 A QMB units optional; QMB main lug and main switch interiors (A	unknown
EDH-SQD-00079	**VCEL06012H1**	VERSA-CRIMP compression lug VCEL06012H1	400 A QMB main switch interior (Table 3) A	unknown
EDH-SQD-00073	**VCEL07512H1**	VERSA-CRIMP compression lug VCEL07512H1	400-800 A QMB units optional; QMB main lug/main switch interiors; QMJ3 A	unknown
EDH-SQD-00075	**VCELC02114S1**	VERSA-CRIMP compression lug VCELC02114S1	100 A 600 V QMB units; QMJ363 A	unknown
EDH-SQD-00076	**VCELC03038H1**	VERSA-CRIMP compression lug VCELC03038H1	200 A QMB units; QMJ364 A	unknown
EDH-SQD-00077	**VCELC05012H1**	VERSA-CRIMP compression lug VCELC05012H1	400-800 A QMB units A	unknown
EDH-SQD-00078	**VCELC07512H1**	VERSA-CRIMP compression lug VCELC07512H1	400-800 A QMB units A	unknown

EDH-SQD-00063	40251-016-51	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-016-51

OEM part number	40251-016-51	A	S65 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, #12-#2 AWG	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S65 oem_spec
Installation location	Load-side terminals of switch unit	C	S65 inference
Breaker compatibility	30 A and 60 A QMB switch units (std)	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00065	40251-018-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-018-50

OEM part number	40251-018-50	A	S65 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, #12-1/0 AWG	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S65 oem_spec
Installation location	Load-side terminals of switch unit	C	S65 inference
Breaker compatibility	100 A 600 V QMB units (QMB263TW/HW, QMB363TW/HW, 100 A side of QMB363T31W/T32W)	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00124	4025101851	Square D	lug	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Lug assembly

OEM part number	4025101851	A	S99 oem_spec
Description	Lug assembly	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	A	same as above
Kit contents	Quantity: per lug	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00067	40251-162-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-162-50

OEM part number	40251-162-50	A	S65 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, #6 AWG-300 kcmil	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S65 oem_spec
Installation location	Load-side terminals of switch unit	C	S65 inference
Breaker compatibility	200 A QMB units (QMB224W, QMB324W, QMB264W, QMB364W)	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00066	40256-014-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40256-014-50

OEM part number	40256-014-50	A	S65 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Optional Cu mechanical lug, #14-1/0 AWG	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S65 oem_spec
Installation location	Load-side terminals of switch unit	C	S65 inference
Breaker compatibility	100 A 600 V QMB units; QMJ363T/H	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00064	40256-034-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40256-034-50

OEM part number	40256-034-50	A	S65 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Optional Cu mechanical lug, #14-#4 AWG (QMB); QMJ361T/362T Cu lug #14-#2	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S65 oem_spec
Installation location	Load-side terminals of switch unit	C	S65 inference
Breaker compatibility	30 A and 60 A QMB units; QMJ361T, QMJ362T	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00070	40256-039-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40256-039-50

OEM part number	40256-039-50	A	S65 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Cu mechanical lug, 1/0 AWG-750 kcmil	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S65 oem_spec
Installation location	Load-side terminals of switch unit	C	S65 inference
Breaker compatibility	QMJ365 (400 A)	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00068	40560-270-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40560-270-50

OEM part number	40560-270-50	A	S65 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Optional Cu mechanical lug, #6 AWG-250 kcmil (QMB); #6-300 (QMJ364)	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S65 oem_spec
Installation location	Load-side terminals of switch unit	C	S65 inference
Breaker compatibility	200 A QMB units; QMJ364T/H	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00074	VCEL02114S1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL02114S1

OEM part number	VCEL02114S1	A	S65 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL021-14S1 (Hyphenated form used in catalog tables)	A	S65 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug #8-1/0 AWG	A	S65 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S65 pp. 9, 15; oem_spec
Breaker compatibility	100 A 600 V QMB units; QMJ363	A	S65 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00071	VCEL030516H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL030516H1

OEM part number	VCEL030516H1	A	S65 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL030-516H1 (Hyphenated form used in catalog tables)	A	S65 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug #4 AWG-300 kcmil	A	S65 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S65 pp. 9, 15; oem_spec
Breaker compatibility	200 A QMB units optional; 200 A QMB main switch interior (Table 3); QMJ364 (VCEL-030-516H1)	A	S65 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00072	VCEL05012H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL05012H1

OEM part number	VCEL05012H1	A	S65 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL050-12H1 (Hyphenated form used in catalog tables)	A	S65 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug 2/0 AWG-500 kcmil	A	S65 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S65 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units optional; QMB main lug and main switch interiors (Tables 2, 3)	A	S65 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00079	VCEL06012H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL06012H1

OEM part number	VCEL06012H1	A	S65 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL060-12H1 (Hyphenated form used in catalog tables)	A	S65 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP compression lug 400-600 kcmil Al or Cu	A	S65 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S65 pp. 9, 15; oem_spec
Breaker compatibility	400 A QMB main switch interior (Table 3)	A	S65 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		
Open question	*VCEL060-12H1 appears only in Table 3 (no un-hyphenated catalog form printed) - confirm orderable number*		

EDH-SQD-00073	VCEL07512H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL07512H1

OEM part number	VCEL07512H1	A	S65 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL075-12H1 (Hyphenated form used in catalog tables)	A	S65 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug 500-750 kcmil Al	A	S65 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S65 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units optional; QMB main lug/main switch interiors; QMJ365	A	S65 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00075	VCELC02114S1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC02114S1

OEM part number	VCELC02114S1	A	S65 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC021-14S1 (Hyphenated form used in catalog tables)	A	S65 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug #6-1/0 AWG	A	S65 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S65 pp. 9, 15; oem_spec
Breaker compatibility	100 A 600 V QMB units; QMJ363	A	S65 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00076	VCELC03038H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC03038H1

OEM part number	VCELC03038H1	A	S65 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC030-38H1 (Hyphenated form used in catalog tables)	A	S65 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug 2/0-300	A	S65 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S65 pp. 9, 15; oem_spec
Breaker compatibility	200 A QMB units; QMJ364	A	S65 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00077	VCELC05012H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC05012H1

OEM part number	VCELC05012H1	A	S65 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC050-12H1 (Hyphenated form used in catalog tables)	A	S65 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug 250-500 kcmil	A	S65 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S65 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units	A	S65 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00078	VCELC07512H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC07512H1

OEM part number	VCELC07512H1	A	S65 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC075-12H1 (Hyphenated form used in catalog tables)	A	S65 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug 400-750 kcmil	A	S65 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S65 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units	A	S65 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00130	**4052098601**	QMB367W Series E1 renewal part: Load base side insulator	QMB367W, Series E1 (E01) A	unknown

EDH-SQD-00130	4052098601	Square D	insulator	STATUS UNKNOWN

QMB367W Series E1 renewal part: Load base side insulator

OEM part number	4052098601	A	S100 oem_spec
Description	Load base side insulator	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 1 per load base	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00092	**QMB15BLW**	QMB blank filler plate QMB15BLW (15 in.)	—	current
EDH-SQD-00089	**QMB1BLW**	QMB blank filler plate QMB1BLW (1.5 in.)	—	current (Crescent lists QMB1BLW as discontinued - unverified
EDH-SQD-00090	**QMB3BLW**	QMB blank filler plate QMB3BLW (3 in.)	—	current
EDH-SQD-00091	**QMB6BLW**	QMB blank filler plate QMB6BLW (6 in.)	—	current

EDH-SQD-00092	QMB15BLW	Square D	filler-plate	CURRENT

QMB blank filler plate QMB15BLW (15 in.)

OEM part number	QMB15BLW	A	S108, S68, S69 oem_spec
Alternate / superseded numbers	GTIN 785901798019	A	S67 alias; oem_spec
Description	Panelboard blank filler plate, 15 in.; Speed-D switchboards with current-series QMB provisions ship with (2)	A	S67, S68 oem_spec
Application	filler for unused QMB mounting space	A	S108 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S89 distributor
Dimensions	Package 2.30 x 16.00 x 26.00 in., 9.04 lb (packaged) (Packaging dimensions, not part dimensions)	A	S67 oem_spec
Status	current	B	S108 oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

EDH-SQD-00089	QMB1BLW	Square D	filler-plate	CURRENT (CRESCENT LIST

QMB blank filler plate QMB1BLW (1.5 in.)

OEM part number	QMB1BLW	A	S108, S68, S69 oem_spec
Description	Blank filler (closing plate) 1.5 in. for current-style QMB panelboards and switchboards with QMB distribution	A	same as above
Application	filler for unused QMB mounting space	A	S108 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S89 distributor
Dimensions	Covers 1.5 in. of QMB mounting space	A	S108 oem_spec
Status	current (Crescent lists QMB1BLW as discontinued - unverified)	C	S89 distributor
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

EDH-SQD-00090	QMB3BLW	Square D	filler-plate	CURRENT

QMB blank filler plate QMB3BLW (3 in.)

OEM part number	QMB3BLW	A	S108, S68, S69 oem_spec
Description	Blank filler (closing plate) 3 in. for current-style QMB panelboards and switchboards with QMB distribution	A	same as above
Application	filler for unused QMB mounting space	A	S108 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S89 distributor
Dimensions	Covers 3 in. of QMB mounting space	A	S108 oem_spec
Status	current	B	same as above
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

EDH-SQD-00091	QMB6BLW	Square D	filler-plate	CURRENT

QMB blank filler plate QMB6BLW (6 in.)

OEM part number	QMB6BLW	A	S108, S68, S69 oem_spec
Description	Blank filler (closing plate) 6 in. for current-style QMB panelboards and switchboards with QMB distribution	A	same as above
Application	filler for unused QMB mounting space	A	S108 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S89 distributor
Dimensions	Covers 6 in. of QMB mounting space	A	S108 oem_spec
Status	current	B	same as above
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00133	**4028343250**	QMB367W Series E1 renewal part: Switch mounting hardware kit:	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00131	**4028343550**	QMB367W Series E1 renewal part: Handle knob kit	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00123	**4028343750**	QMB363TW Series E1 renewal part: Handle knob kit	QMB363TW, Series E1 (E01) A	unknown

EDH-SQD-00133	4028343250	Square D	hardware-kit	STATUS UNKNOWN

QMB367W Series E1 renewal part: Switch mounting hardware kit:

OEM part number	4028343250	A	S100 oem_spec
Description	Switch mounting hardware kit: (6) spring nuts, (6) screws, (1) circuit ID card	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: -	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00131	4028343550	Square D	hardware-kit	STATUS UNKNOWN

QMB367W Series E1 renewal part: Handle knob kit

OEM part number	4028343550	A	S100 oem_spec
Description	Handle knob kit	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: -	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00123	4028343750	Square D	hardware-kit	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Handle knob kit

OEM part number	4028343750	**A**	S99 oem_spec
Description	Handle knob kit	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00129	**2142720241**	QMB367W Series E1 renewal part: Load base mounting screw	QMB367W, Series E1 (E01) **A**	unknown
EDH-SQD-00120	**2330241601**	QMB363TW Series E1 renewal part: Push nut for arc suppression assembly	QMB363TW, Series E1 (E01) **A**	unknown
EDH-SQD-00125	**2342702001**	QMB363TW Series E1 renewal part: Lug mounting nut	QMB363TW, Series E1 (E01) **A**	unknown
EDH-SQD-00132	**2342702400**	QMB367W Series E1 renewal part: Lug mounting nut	QMB367W, Series E1 (E01) **A**	unknown
EDH-SQD-00122	**4020506501**	QMB363TW Series E1 renewal part: Load base mounting screw	QMB363TW, Series E1 (E01) **A**	unknown

EDH-SQD-00129	2142720241	Square D	fastener	STATUS UNKNOWN

QMB367W Series E1 renewal part: Load base mounting screw

OEM part number	2142720241	**A**	S100 oem_spec
Description	Load base mounting screw	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 3 per load base	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00120	2330241601	Square D	fastener	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Push nut for arc suppression assembly

OEM part number	2330241601	**A**	S99 oem_spec
Description	Push nut for arc suppression assembly	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 2 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00125	2342702001	Square D	fastener	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Lug mounting nut

OEM part number	2342702001	**A**	S99 oem_spec
Description	Lug mounting nut (also used as Keps nut in QO load centers per FA294947)	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: per lug	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00132	2342702400	Square D	fastener	STATUS UNKNOWN

QMB367W Series E1 renewal part: Lug mounting nut

OEM part number	2342702400	A	S100 oem_spec
Description	Lug mounting nut	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 1 per lug	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00122	4020506501	Square D	fastener	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Load base mounting screw

OEM part number	4020506501	A	S99 oem_spec
Description	Load base mounting screw	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	A	same as above
Kit contents	Quantity: 2 per load base	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00058	**QMB600T6**	QMB Class T fuse adapter kit QMB600T6	QMB366W A	unknown
EDH-SQD-00059	**QMB800T6**	QMB Class T fuse adapter kit QMB800T6	QMB367W A	unknown

EDH-SQD-00058	QMB600T6	Square D	conversion-kit	STATUS UNKNOWN

QMB Class T fuse adapter kit QMB600T6

OEM part number	QMB600T6	A	S65 Table 4 notes e, j; oem_spec
Description	Kit to adapt QMB366W 600 A switch to 600 Vac Class T fuses (use T6 fuses with standard hp ratings only)	A	same as above
Application	accessory	A	S65 oem_spec
Breaker compatibility	QMB366W	A	S65 Table 4; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Kit contents		

EDH-SQD-00059	QMB800T6	Square D	conversion-kit	STATUS UNKNOWN

QMB Class T fuse adapter kit QMB800T6

OEM part number	QMB800T6	A	S65 Table 4 notes e, j; oem_spec
Description	Kit to adapt QMB367W 800 A switch to 600 Vac Class T fuses (standard hp ratings only)	A	same as above
Application	accessory	A	S65 oem_spec
Breaker compatibility	QMB367W	A	S65 Table 4; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Kit contents		

Spd Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00093	**QMB1IMA_**	QMB Surgelogic IMA TVSS unit QMB1IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00094	**QMB2IMA_**	QMB Surgelogic IMA TVSS unit QMB2IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00095	**QMB3IMA_**	QMB Surgelogic IMA TVSS unit QMB3IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00096	**QMB4IMA_**	QMB Surgelogic IMA TVSS unit QMB4IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00097	**QMB8IMA_**	QMB Surgelogic IMA TVSS unit QMB8IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00098	**TVS12RMU**	Surgelogic TVSS remote monitor TVS12RMU	—	unknown

EDH-SQD-00093 QMB1IMA_ Square D spd-kit LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB1IMA

OEM part number	QMB1IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S65 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 120/240 Vac 1-phase; MCOV 150	A	S65 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S65 oem_spec
Voltage rating	120/240 Vac 1-phase; MCOV 150	A	S65 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S65 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00094 QMB2IMA_ Square D spd-kit LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB2IMA

OEM part number	QMB2IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S65 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 208Y/120 Vac 3-phase 4-wire; MCOV 150	A	S65 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S65 oem_spec
Voltage rating	208Y/120 Vac 3-phase 4-wire; MCOV 150	A	S65 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S65 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00095 QMB3IMA_ Square D spd-kit LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB3IMA

OEM part number	QMB3IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S65 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 240/120 Vac 3-phase high-leg delta; MCOV 275/150	A	S65 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S65 oem_spec
Voltage rating	240/120 Vac 3-phase high-leg delta; MCOV 275/150	A	S65 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S65 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00096	QMB4IMA_	Square D	spd-kit	LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB4IMA

OEM part number	QMB4IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S65 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 480Y/277 Vac 3-phase 4-wire; MCOV 320	A	S65 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S65 oem_spec
Voltage rating	480Y/277 Vac 3-phase 4-wire; MCOV 320	A	S65 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S65 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00097	QMB8IMA_	Square D	spd-kit	LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB8IMA

OEM part number	QMB8IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S65 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 600Y/347 Vac 3-phase 4-wire; MCOV 420	A	S65 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S65 oem_spec
Voltage rating	600Y/347 Vac 3-phase 4-wire; MCOV 420	A	S65 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S65 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00098	TVS12RMU	Square D	spd-kit	STATUS UNKNOWN

Surgelogic TVSS remote monitor TVS12RMU

OEM part number	TVS12RMU	A	S65 Table 15, p. 20; oem_spec
Description	Remote monitor providing TVSS status up to 1000 ft from unit	A	S65 Table 15; oem_spec
Application	accessory	A	S65 oem_spec
Cross-links	Families: QMB		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00056	**HRK1020**	QMB Class R fuse kit HRK1020	Listed for: QMB224W, QMB324W, QMB263TW, QMB263HW, QMB264W, QMB363TW, Q A	unknown
EDH-SQD-00052	**HRK30**	QMB Class R fuse kit HRK30	Listed for: QMB221TW, QMB221HW, QMB321TW, QMB321HW A	unknown
EDH-SQD-00055	**QMB100R**	QMB Class R fuse kit QMB100R	Listed for: QMB223TW, QMB223HW, QMB323TW, QMB323HW A	unknown
EDH-SQD-00062	**QMB200EK**	QMB electrical interlock kit QMB200EK	200 A QMB units and QMJ365; listed for QMB224W, QMB324W, QMB264W, QMB3 A	unknown
EDH-SQD-00060	**QMB300EK**	QMB electrical interlock kit QMB300EK	30 A and 60 A (4.5 in.) QMB units; QMJ361T; listed for QMB221TW, QMB22 A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00053	**QMB36R**	QMB Class R fuse kit QMB36R	Listed for: QMB222TW, QMB222HW, QMB322TW, QMB322HW, QMB261TW, QMB261HW **A**	unknown
EDH-SQD-00057	**QMB4060R**	QMB Class R fuse kit QMB4060R	Listed for: QMB225W, QMB325W, QMB326W, QMB365W, QMB366W **A**	unknown
EDH-SQD-00054	**QMB60R**	QMB Class R fuse kit QMB60R	Listed for: QMB262TW, QMB262HW, QMB362TW, QMB362HW, QMB362T21W, QMB363 **A**	unknown
EDH-SQD-00061	**QMB610EK**	QMB electrical interlock kit QMB610EK	60-100 A (6/7.5 in.) QMB units and QMJ362T-QMJ364H; listed for QMB223T **A**	unknown

EDH-SQD-00056 HRK1020 — Square D — breaker-accessory — STATUS UNKNOWN

QMB Class R fuse kit HRK1020

OEM part number	HRK1020	**A**	S65 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 100 A 600 V and 200 A QMB switch units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	**A**	S65 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	**A**	S65 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	**C**	S65 p. 8; inference
Breaker compatibility	Listed for: QMB224W, QMB324W, QMB263TW, QMB263HW, QMB264W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMB364W	**A**	S65 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		
Open question	*HRK30/HRK1020 prefix differs from QMB..R kits - are they shared with Square D heavy-duty safety switches?*		

EDH-SQD-00052 HRK30 — Square D — breaker-accessory — STATUS UNKNOWN

QMB Class R fuse kit HRK30

OEM part number	HRK30	**A**	S65 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit (rejection kit), 30 A QMB switches; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	**A**	S65 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	**A**	S65 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	**C**	S65 p. 8; inference
Breaker compatibility	Listed for: QMB221TW, QMB221HW, QMB321TW, QMB321HW	**A**	S65 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		
Open question	*HRK30/HRK1020 prefix differs from QMB..R kits - are they shared with Square D heavy-duty safety switches?*		

EDH-SQD-00055	QMB100R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB100R

OEM part number	QMB100R	A	S65 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 100 A 240 V QMB twin units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S65 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S65 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S65 p. 8; inference
Breaker compatibility	Listed for: QMB223TW, QMB223HW, QMB323TW, QMB323HW	A	S65 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00062	QMB200EK	Square D	breaker-accessory	STATUS UNKNOWN

QMB electrical interlock kit QMB200EK

OEM part number	QMB200EK	A	S65 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB200EK-1	A	S65 alias; Table 4 note a; oem_spec
	QMB200EK-2 [alias]	A	same as above
Description	Electrical interlock (auxiliary contact) kit for QMB/QMJ switches; suffix -1 = 1 NO + 1 NC, -2 = 2 NO + 2 NC; for motor control or auxiliary circuits; field installable (QMB 30-200 A; QMJ 30-400 A)	A	S65 pp. 9, 15; Table 4 note a; oem_spec
Application	accessory	A	S65 oem_spec
Breaker compatibility	200 A QMB units and QMJ365; listed for QMB224W, QMB324W, QMB264W, QMB364W, QMJ365	A	S65 Tables 4, 6; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	contact ratings, Kit contents		

EDH-SQD-00060	QMB300EK	Square D	breaker-accessory	STATUS UNKNOWN

QMB electrical interlock kit QMB300EK

OEM part number	QMB300EK	A	S65 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB300EK-1	A	S65 alias; Table 4 note a; oem_spec
	QMB300EK-2 [alias]	A	same as above
Description	Electrical interlock (auxiliary contact) kit for QMB/QMJ switches; suffix -1 = 1 NO + 1 NC, -2 = 2 NO + 2 NC; for motor control or auxiliary circuits; field installable (QMB 30-200 A; QMJ 30-400 A)	A	S65 pp. 9, 15; Table 4 note a; oem_spec
Application	accessory	A	S65 oem_spec
Breaker compatibility	30 A and 60 A (4.5 in.) QMB units; QMJ361T; listed for QMB221TW, QMB221HW, QMB222TW, QMB222HW, QMB321TW, QMB321HW, QMB322TW, QMB322HW, QMB261TW, QMB261HW, QMB361TW, QMB361HW, QMJ361T	A	S65 Tables 4, 6; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	contact ratings, Kit contents		

EDH-SQD-00053	QMB36R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB36R

OEM part number	QMB36R	A	S65 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for QMB switch units (30 A 600 V / 60 A 240 V positions per Table 4); with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S65 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S65 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S65 p. 8; inference
Breaker compatibility	Listed for: QMB222TW, QMB222HW, QMB322TW, QMB322HW, QMB261TW, QMB261HW, QMB361TW, QMB361HW, QMB362T21W, QMB363T31W	A	S65 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00057	QMB4060R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB4060R

OEM part number	QMB4060R	A	S65 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 400 A and 600 A QMB switch units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S65 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S65 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S65 p. 8; inference
Breaker compatibility	Listed for: QMB225W, QMB325W, QMB326W, QMB365W, QMB366W	A	S65 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00054	QMB60R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB60R

OEM part number	QMB60R	A	S65 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 60 A 600 V QMB switch units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S65 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S65 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S65 p. 8; inference
Breaker compatibility	Listed for: QMB262TW, QMB262HW, QMB362TW, QMB362HW, QMB362T21W, QMB363T32W	A	S65 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00061	QMB610EK	Square D	breaker-accessory	STATUS UNKNOWN

QMB electrical interlock kit QMB610EK

OEM part number	QMB610EK	A	S65 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB610EK-1	A	S65 alias; Table 4 note a; oem_spec
	QMB610EK-2 [alias]	A	same as above
Description	Electrical interlock (auxiliary contact) kit for QMB/QMJ switches; suffix -1 = 1 NO + 1 NC, -2 = 2 NO + 2 NC; for motor control or auxiliary circuits; field installable (QMB 30-200 A; QMJ 30-400 A)	A	S65 pp. 9, 15; Table 4 note a; oem_spec
Application	accessory	A	S65 oem_spec
Breaker compatibility	60-100 A (6/7.5 in.) QMB units and QMJ362T-QMJ364H; listed for QMB223TW, QMB223HW, QMB323TW, QMB323HW, QMB262TW, QMB262HW, QMB263TW, QMB263HW, QMB362TW, QMB362HW, QMB362T21W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMJ362T, QMJ363T, QMJ363H, QMJ364T, QMJ364H	A	S65 Tables 4, 6; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	contact ratings, Kit contents		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00119	**4052017302**	QMB363TW Series E1 renewal part: Arc shield	QMB363TW, Series E1 (E01) A	unknown
EDH-SQD-00118	**4052021450**	QMB363TW Series E1 renewal part: Arc suppressor assembly	QMB363TW, Series E1 (E01) A	unknown
EDH-SQD-00121	**4052021650**	QMB363TW Series E1 renewal part: Load base assembly	QMB363TW, Series E1 (E01) A	unknown
EDH-SQD-00126	**4052031850**	QMB367W Series E1 renewal part: Arc suppressor assembly	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00128	**4052036750**	QMB367W Series E1 renewal part: Load base assembly	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00127	**4052085601**	QMB367W Series E1 renewal part: Arc shield	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00002	**QMB221HW**	QMB fusible switch unit QMB221HW (2P 240 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO A	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00001	**QMB221TW**	QMB fusible switch unit QMB221TW (2P 240 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO A	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00004	**QMB222HW**	QMB fusible switch unit QMB222HW (2P 240 Vac, 60-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO A	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00003	**QMB222TW**	QMB fusible switch unit QMB222TW (2P 240 Vac, 60-60 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO A	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00006	**QMB223HW**	QMB fusible switch unit QMB223HW (2P 240 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO A	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00005	**QMB223TW**	QMB fusible switch unit QMB223TW (2P 240 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO A	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00007	**QMB224W**	QMB fusible switch unit QMB224W (2P 240 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO A	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00008	**QMB225W**	QMB fusible switch unit QMB225W (2P 240 Vac, 400 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00009	**QMB225WT3**	QMB fusible switch unit QMB225WT3 (2P 240 Vac, 400 A)	Use 300 Vac Class T fuses only A	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00023	**QMB261HW**	QMB fusible switch unit QMB261HW (2P 600 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO A	current per 2015 catalog (catalog warns it may contain obsol

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00022	**QMB261TW**	QMB fusible switch unit QMB261TW (2P 600 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00025	**QMB262HW**	QMB fusible switch unit QMB262HW (2P 600 Vac, 60-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00024	**QMB262TW**	QMB fusible switch unit QMB262TW (2P 600 Vac, 60-60 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00027	**QMB263HW**	QMB fusible switch unit QMB263HW (2P 600 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00026	**QMB263TW**	QMB fusible switch unit QMB263TW (2P 600 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00028	**QMB264W**	QMB fusible switch unit QMB264W (2P 600 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00011	**QMB321HW**	QMB fusible switch unit QMB321HW (3P 240 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00010	**QMB321TW**	QMB fusible switch unit QMB321TW (3P 240 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00013	**QMB322HW**	QMB fusible switch unit QMB322HW (3P 240 Vac, 60-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00012	**QMB322TW**	QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00015	**QMB323HW**	QMB fusible switch unit QMB323HW (3P 240 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00014	**QMB323TW**	QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00016	**QMB324W**	QMB fusible switch unit QMB324W (3P 240 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00017	**QMB325W**	QMB fusible switch unit QMB325W (3P 240 Vac, 400 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00018	**QMB325WT3**	QMB fusible switch unit QMB325WT3 (3P 240 Vac, 400 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00019	**QMB326W**	QMB fusible switch unit QMB326W (3P 240 Vac, 600 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00020	**QMB326WT3**	QMB fusible switch unit QMB326WT3 (3P 240 Vac, 600 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00021	**QMB327WT3**	QMB fusible switch unit QMB327WT3 (3P 240 Vac, 800 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00030	**QMB361HW**	QMB fusible switch unit QMB361HW (3P 600 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00029	**QMB361TW**	QMB fusible switch unit QMB361TW (3P 600 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00032	**QMB362HW**	QMB fusible switch unit QMB362HW (3P 600 Vac, 60-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00033	**QMB362T21W**	QMB fusible switch unit QMB362T21W (3P 600 Vac, 60-30 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00031	**QMB362TW**	QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00035	**QMB363HW**	QMB fusible switch unit QMB363HW (3P 600 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00036	**QMB363T31W**	QMB fusible switch unit QMB363T31W (3P 600 Vac, 100-30 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00037	**QMB363T32W**	QMB fusible switch unit QMB363T32W (3P 600 Vac, 100-60 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00034	**QMB363TW**	QMB fusible switch unit QMB363TW (3P 600 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00038	**QMB364W**	QMB fusible switch unit QMB364W (3P 600 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00039	**QMB365W**	QMB fusible switch unit QMB365W (3P 600 Vac, 400 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00040	**QMB365WT6**	QMB fusible switch unit QMB365WT6 (3P 600 Vac, 400 A)	Use 600 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00041	**QMB366W**	QMB fusible switch unit QMB366W (3P 600 Vac, 600 A)	Adapt to 600 Vac Class T fuses with kit QMB600T6 (standard hp ratings **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00042	**QMB367W**	QMB fusible switch unit QMB367W (3P 600 Vac, 800 A)	Adapt to 600 Vac Class T fuses with kit QMB800T6; Class J provisions n **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00044	**QMJ361T**	QMJ fusible switch unit QMJ361T (30-30 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB300 **A**	current per 2015 catalog
EDH-SQD-00045	**QMJ362T**	QMJ fusible switch unit QMJ362T (60-60 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00047	**QMJ363H**	QMJ fusible switch unit QMJ363H (100-blank A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00046	**QMJ363T**	QMJ fusible switch unit QMJ363T (100-100 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00049	**QMJ364H**	QMJ fusible switch unit QMJ364H (200-blank A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00048	**QMJ364T**	QMJ fusible switch unit QMJ364T (200-200 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00050	**QMJ365**	QMJ fusible switch unit QMJ365 (400 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB200 **A**	current per 2015 catalog
EDH-SQD-00051	**QMJ366**	QMJ fusible switch unit QMJ366 (600 A)	600 V Class J fuses only; 200 kA SCCR **A**	current per 2015 catalog

EDH-SQD-00119	4052017302	Square D	other	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Arc shield

OEM part number	4052017302	**A**	S99 oem_spec
Description	Arc shield (top cover)	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 1 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00118	4052021450	Square D	other	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Arc suppressor assembly

OEM part number	4052021450	**A**	S99 oem_spec
Description	Arc suppressor assembly	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 1 per switch (twin = per switch)	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00121	4052021650	Square D	other	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Load base assembly

OEM part number	4052021650	**A**	S99 oem_spec
Description	Load base assembly (includes lugs)	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 1 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00126	4052031850	Square D	other	STATUS UNKNOWN

QMB367W Series E1 renewal part: Arc suppressor assembly

OEM part number	4052031850	**A**	S100 oem_spec
Description	Arc suppressor assembly	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 3 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00128	4052036750	Square D	other	STATUS UNKNOWN

QMB367W Series E1 renewal part: Load base assembly

OEM part number	4052036750	**A**	S100 oem_spec
Description	Load base assembly (includes lugs)	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 3 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00127	4052085601	Square D	other	STATUS UNKNOWN

QMB367W Series E1 renewal part: Arc shield

OEM part number	4052085601	A	S100 oem_spec
Description	Arc shield	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 3 per switch	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00002	QMB221HW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB221HW (2P 240 Vac, 30-blank A)

OEM part number	QMB221HW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 30-blank (single switch in twin frame) A; Blank units cannot be modified to accept a switch interior	A	S65 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	30-blank (single switch in twin frame) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00001	QMB221TW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB221TW (2P 240 Vac, 30-30 A)

OEM part number	QMB221TW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (2 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00004	QMB222HW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB222HW (2P 240 Vac, 60-blank A)

OEM part number	QMB222HW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00003	QMB222TW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB222TW (2P 240 Vac, 60-60 A)

OEM part number	QMB222TW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 60-60 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00006	QMB223HW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB223HW (2P 240 Vac, 100-blank A)

OEM part number	QMB223HW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00005	QMB223TW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB223TW (2P 240 Vac, 100-100 A)

OEM part number	QMB223TW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 100-100 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00007	QMB224W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB224W (2P 240 Vac, 200 A)

OEM part number	QMB224W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00008	QMB225W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB225W (2P 240 Vac, 400 A)

OEM part number	QMB225W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 400 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Poles	2	A	S65 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	400 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00009	QMB225WT3	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB225WT3 (2P 240 Vac, 400 A)

OEM part number	QMB225WT3	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac, 400 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S65 Table 4 note c; oem_spec
Poles	2	A	S65 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	400 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable (#1-600); no optional lugs	A	S65 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00023	QMB261HW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB261HW (2P 600 Vac, 30-blank A)

OEM part number	QMB261HW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 30-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	30-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00022	QMB261TW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB261TW (2P 600 Vac, 30-30 A)

OEM part number	QMB261TW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00025	QMB262HW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB262HW (2P 600 Vac, 60-blank A)

OEM part number	QMB262HW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00024	QMB262TW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB262TW (2P 600 Vac, 60-60 A)

OEM part number	QMB262TW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 60-60 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00027	QMB263HW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB263HW (2P 600 Vac, 100-blank A)

OEM part number	QMB263HW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00026	QMB263TW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB263TW (2P 600 Vac, 100-100 A)

OEM part number	QMB263TW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 100-100 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (2 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00028	QMB264W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB264W (2P 600 Vac, 200 A)

OEM part number	QMB264W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00011	QMB321HW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB321HW (3P 240 Vac, 30-blank A)

OEM part number	QMB321HW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 30-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	30-blank A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00010	QMB321TW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB321TW (3P 240 Vac, 30-30 A)

OEM part number	QMB321TW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (2 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00013	QMB322HW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB322HW (3P 240 Vac, 60-blank A)

OEM part number	QMB322HW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00012	QMB322TW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)

OEM part number	QMB322TW	A	S65 Table 4, pp. 10-11; oem_spec

Alternate / superseded numbers	QMB322TD (Distributor-listed variant; FA119872/FA122651-family FAQs cite 'TD' units as replacements for legacy switches; relation of TD vs TW suffix unknown)	C	S92 alias; distributor
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 60-60 (twin) A	A	S65 Table 4, pp. 10-11; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		
Open question	*What distinguishes QMB322TD from QMB322TW (suffix D vs W)? Is TD the legacy-interior-compatible version?*		

EDH-SQD-00015	QMB323HW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB323HW (3P 240 Vac, 100-blank A)

OEM part number	QMB323HW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00014	QMB323TW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)

OEM part number	QMB323TW	A	S65 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB323TD (QMB323TD is Schneider's stated replacement for legacy QMB310T; relation to QMB323TW unknown)	C	S92, S101 alias; distributor

Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 100-100 (twin) A	A	S65 Table 4, pp. 10-11; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		
Open question	*Is QMB323TD a variant of QMB323TW for pre-1984 QM/QW interiors?*		

EDH-SQD-00016	QMB324W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB324W (3P 240 Vac, 200 A)

OEM part number	QMB324W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00017	QMB325W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB325W (3P 240 Vac, 400 A)

OEM part number	QMB325W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 400 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Poles	3	A	S65 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	400 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00018	QMB325WT3	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB325WT3 (3P 240 Vac, 400 A)

OEM part number	QMB325WT3	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 400 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S65 Table 4 note c; oem_spec
Poles	3	A	S65 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	400 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable (#1-600)	A	S65 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00019	QMB326W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB326W (3P 240 Vac, 600 A)

OEM part number	QMB326W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 600 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Poles	3	A	S65 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	600 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00020	QMB326WT3	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB326WT3 (3P 240 Vac, 600 A)

OEM part number	QMB326WT3	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 600 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S65 Table 4 note c; oem_spec
Poles	3	A	S65 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	600 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable ((2) 3/0-600)	A	S65 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00021	QMB327WT3	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB327WT3 (3P 240 Vac, 800 A)

OEM part number	QMB327WT3	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 800 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S65 Table 4 note c; oem_spec
Poles	3	A	S65 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	800 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	(3) 40251-287-50 Al mech 3/0-600 (std); Al crimp (3) VCEL05012H1 or (3) VCEL07512H1; Cu crimp VCELC05012H1 / VCELC07512H1	A	S65 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00030	QMB361HW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB361HW (3P 600 Vac, 30-blank A)

OEM part number	QMB361HW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 30-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	30-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R; 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00029	QMB361TW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB361TW (3P 600 Vac, 30-30 A)

OEM part number	QMB361TW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R; 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00032	QMB362HW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB362HW (3P 600 Vac, 60-blank A)

OEM part number	QMB362HW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R; 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00033	QMB362T21W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB362T21W (3P 600 Vac, 60-30 A)

OEM part number	QMB362T21W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 60-30 (twin, unequal) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	60-30 (twin, unequal) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R and QMB36R (1 each); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00031	QMB362TW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)

OEM part number	QMB362TW	A	S65 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB362T (FAQ FA88047 names 'QMB362T' (no W) as replacement for QMB3606T; relation to QMB362TW unverified)	C	S103 alias; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 60-60 (twin) A	A	S65 Table 4, pp. 10-11; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00035	QMB363HW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363HW (3P 600 Vac, 100-blank A)

OEM part number	QMB363HW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00036	QMB363T31W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363T31W (3P 600 Vac, 100-30 A)

OEM part number	QMB363T31W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-30 (twin, unequal) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-30 (twin, unequal) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 and QMB36R (1 each); 100 A side: 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0; 30 A side: 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00037	QMB363T32W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363T32W (3P 600 Vac, 100-60 A)

OEM part number	QMB363T32W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-60 (twin, unequal) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-60 (twin, unequal) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 and QMB60R (1 each); 100 A side: 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0; 60 A side: 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00034	QMB363TW	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363TW (3P 600 Vac, 100-100 A)

OEM part number	QMB363TW	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-100 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (2 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Replacement / successor	Field-replaceable Series E1 parts listed in FAQ FA92305; see separate part records	A	S99 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00038	QMB364W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB364W (3P 600 Vac, 200 A)

OEM part number	QMB364W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S65 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00039	QMB365W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB365W (3P 600 Vac, 400 A)

OEM part number	QMB365W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac / 250 Vdc, 400 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Poles	3	A	S65 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	400 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00040	QMB365WT6	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB365WT6 (3P 600 Vac, 400 A)

OEM part number	QMB365WT6	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 400 (single, 600 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Use 600 Vac Class T fuses only	A	S65 Table 4 note h; oem_spec
Poles	3	A	S65 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac	A	same as above
Current rating	400 (single, 600 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable ((2) 3/0-600)	A	S65 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00041	QMB366W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB366W (3P 600 Vac, 600 A)

OEM part number	QMB366W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac / 250 Vdc, 600 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Adapt to 600 Vac Class T fuses with kit QMB600T6 (standard hp ratings only)	A	S65 Table 4 note e; oem_spec
Poles	3	A	S65 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	600 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1; Cu crimp (2) VCELC05012H1	A	S65 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00042	QMB367W	Square D	other	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB367W (3P 600 Vac, 800 A)

OEM part number	QMB367W	A	S65 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 800 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S65, S63 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S65 pp. 6-7; oem_spec
Breaker compatibility	Adapt to 600 Vac Class T fuses with kit QMB800T6; Class J provisions not available on 800 A	A	S65 Table 4 notes d, j; oem_spec
Poles	3	A	S65 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac	A	same as above
Current rating	800 (single) A	A	same as above
Kit contents	(3) 40251-287-50 Al mech 3/0-600 (std); Al crimp (3) VCEL05012H1 or (3) VCEL07512H1; Cu crimp VCELC05012H1 / VCELC07512H1	A	S65 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S65 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S65 oem_spec
Replacement / successor	Field-replaceable Series E1 parts listed in FAQ FA92286; see separate part records	A	S100 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S65 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00044	QMJ361T	Square D	other	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ361T (30-30 A)

OEM part number	QMJ361T	A	S65 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 30-30 (twin) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S65 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB300EK-1 or -2	A	S65 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S65 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S65 p. 14; oem_spec
Current rating	30-30 (twin) A	A	S65 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-034-50; wire #14-#2 Al/Cu; use 90 C insulated conductors sized at 75 C ampacity	A	S65 Table 7; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S65 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S65 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00045	QMJ362T	Square D	other	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ362T (60-60 A)

OEM part number	QMJ362T	A	S65 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 60-60 (twin) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S65 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S65 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S65 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S65 p. 14; oem_spec
Current rating	60-60 (twin) A	A	S65 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-034-50; wire #14-#2 Al/Cu; use 90 C insulated conductors sized at 75 C ampacity	A	S65 Table 7; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S65 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S65 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00047	QMJ363H	Square D	other	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ363H (100-blank A)

OEM part number	QMJ363H	A	S65 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 6/7, p. 16; Table 6 note c; oem_spec
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S65 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S65 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S65 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S65 p. 14; oem_spec
Current rating	100-blank A	A	S65 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-014-50; optional VCELC or VCEL-021-14S1; #14-1/0; use 90 C insulated conductors sized at 75 C ampacity	A	S65 Table 7; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S65 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S65 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00046	QMJ363T	Square D	other	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ363T (100-100 A)

OEM part number	QMJ363T	A	S65 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 100-100 (twin) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S65 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S65 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S65 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S65 p. 14; oem_spec
Current rating	100-100 (twin) A	A	S65 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-014-50; optional VERSA-CRIMP VCELC or VCEL-021-14S1; #14-1/0; use 90 C insulated conductors sized at 75 C ampacity	A	S65 Table 7; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S65 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S65 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00049	QMJ364H	Square D	other	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ364H (200-blank A)

OEM part number	QMJ364H	A	S65 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 200-blank A; Blank units cannot be modified to accept a switch interior	A	S65 Table 6/7, p. 16; Table 6 note c; oem_spec
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S65 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S65 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S65 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S65 p. 14; oem_spec
Current rating	200-blank A	A	S65 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40560-270-50; optional VCEL-030-516H1 or VCELC-030-38H1; #6-300; use 90 C insulated conductors sized at 75 C ampacity	A	S65 Table 7; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S65 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S65 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00048	QMJ364T	Square D	other	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ364T (200-200 A)

OEM part number	QMJ364T	A	S65 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 200-200 (twin) A	A	same as above
Application	Tandem 200 A fusible arrangement uses QMJ364T (600 V, J clips); NEMA 1, 400-1200 A interiors (Tandem statement from Schneider FAQ FA280263 via search summary)	B	S65, S88 oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S65 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S65 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S65 p. 14; oem_spec
Current rating	200-200 (twin) A	A	S65 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40560-270-50; optional VCEL-030-516H1 or VCELC-030-38H1; #6-300; use 90 C insulated conductors sized at 75 C ampacity	A	S65 Table 7; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S65 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S65 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00050	QMJ365	Square D	other	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ365 (400 A)

OEM part number	QMJ365	A	S65 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 400 (single) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S65 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB200EK-1 or -2	A	S65 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S65 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S65 p. 14; oem_spec
Current rating	400 (single) A	A	S65 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-039-50; optional VCELC or VCEL-075-12H1; 1/0-750; use 90 C insulated conductors sized at 75 C ampacity	A	S65 Table 7; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S65 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S65 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00051	QMJ366	Square D	other	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ366 (600 A)

OEM part number	QMJ366	A	S65 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 600 (single) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S65 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR	A	S65 p. 14; oem_spec
Poles	3	A	S65 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S65 p. 14; oem_spec
Current rating	600 (single) A	A	S65 Table 6/7, p. 16; oem_spec
Kit contents	(2) per phase 3/0-600; optional VCELC or VCEL-050-12HS1; use 90 C insulated conductors sized at 75 C ampacity	A	S65 Table 7; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S65 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S65 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

4.3 QMB-LEGACY — Legacy QMB distribution (pre-October-1984 QM and QW interiors)

FAM-SQD-005 · panelboard · aka QM interior, QW interior, old style QMB, QMB Series 1-4, Saflex, QMB Saflex, Saflex panelboard · markings: Square D

Older QMB fusible distribution used in panelboards and switchboards before the current (Series E1) design. Legacy switch catalog numbers had no 'W' suffix (e.g. QMB3606T, QMB310T, QMB3620, QMB3240, QMB2240, QMB3260). Current-design units are retrofitted using plug-on extension assemblies (QMB306EX, QMB306LEX, QMB310EX, QMB310LEX, QMB-320-EX) in QW interiors; QM interiors built 1961-1984 accept some current units directly.

Attribute	Value	Cl.	Sources
Status	obsolete; old-design blank fillers obsolete with no replacement	A	S98 oem_spec
Era of manufacture	QM (31 in. wide box) and QW (38 in. wide box) interiors built before October 1984; pre-1961 interiors (incl. round bus bar) have no replacement switches (From several Schneider FAQs (FA119872, FA88047, FA127541, FA100372))	A	same as above
saflex	Schneider FAQ refers to 'an old QMB Saflex Panelboard' (QW type 38 in. box with flatwise bus needs QMB310EX for current CB units); surplus listings label QMB3606T Series 2/4 units 'QMB Saflex' ('Saflex' = legacy QMB panelboard trade name per OEM FAQ; surplus label corroborates)	A	S110, S111 oem_spec

Key documents: S98 FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified) QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T; S101 FA119872 FAQ FA119872: replacement for a QMB310T, series 1 through 4 switch; S102 FA127541 FAQ FA127541: replacement for a QMB3620; S103 FA88047 FAQ FA88047: replacement for a QMB3606T; S104 FA100372 FAQ FA100372: replacement for a QMB3260 600 A QMB switch; S105 FA128647 FAQ FA128647: replacement parts for a QMB3240; S106 FA122651 FAQ FA122651: replacement switch for the old QMB2240, 2P 400 A QMB switch; S109 FA113960 FAQ FA113960: replacement branch switch for the old QMB210T Series 1 through 4; S110 FA118445 FAQ FA118445: part number for a 300 A / 3P circuit breaker unit for an old QMB Saflex pane; S111 MB Glick surplus listing: Square D QMB3606T QMB Saflex panelboard switch unit 60 A Series

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00112	**QMB3300LA**	QMB circuit breaker unit QMB3300LA	—	unknown
EDH-SQD-00111	**QMB3400LA**	QMB circuit breaker unit QMB3400LA	—	unknown

EDH-SQD-00112	QMB3300LA	Square D	breaker-mounting-kit	STATUS UNKNOWN

QMB circuit breaker unit QMB3300LA

OEM part number	QMB3300LA	A	S110 oem_spec
Description	QMB circuit breaker unit, 3P 300 A (LA frame) for old QMB Saflex panelboards; not for QM panelboards made before 1961; QMB310EX needed for QW 38 in. flatwise-bus panels	A	same as above
Application	branch	A	same as above
Breaker frame	LA (implied by 'LA' suffix)	C	S110 inference
Cross-links	Families: QMB-LEGACY, QMB · Breakers: QMB circuit breaker units (H-, J-, L-frame), LA / LH (I-Line)		
Not yet documented	current status, lug kit		
Open question	*Supplemental Digest reference for QMB3400LA not retrieved*		

EDH-SQD-00111	QMB3400LA	Square D	breaker-mounting-kit	STATUS UNKNOWN

QMB circuit breaker unit QMB3400LA

OEM part number	QMB3400LA	A	S104 oem_spec
Description	QMB circuit breaker unit, 3P 400 A (LA frame), 7.5 in. mounting space; replacement for legacy QMB3240/QMB2240/QMB3260/QMB3640; fits QMB interiors 1961-Oct 1984 (QMB310EX needed in QW)	A	S104, S105, S106, S98 oem_spec
Application	branch	A	S104 oem_spec
Breaker frame	LA (implied by 'LA' suffix)	C	S104 inference
Cross-links	Families: QMB-LEGACY, QMB · Breakers: QMB circuit breaker units (H-, J-, L-frame), LA / LH (I-Line)		
Not yet documented	current status, lug kit		
Open question	*Supplemental Digest reference for QMB3400LA not retrieved*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00113	**QW1BL**	Legacy QW interior blank filler QW1BL	—	obsolete, NLA, no replacement; Schneider suggests local shee
EDH-SQD-00114	**QW3BL**	Legacy QW interior blank filler QW3BL	—	obsolete, NLA, no replacement; Schneider suggests local shee

EDH-SQD-00113	QW1BL	Square D	filler-plate	OBSOLETE, NLA, NO REPL

Legacy QW interior blank filler QW1BL

OEM part number	QW1BL	A	S105, S106 oem_spec
Description	Blank filler plate for old-design (QW) QMB interior, 1.5 in. (FA122651 summary called QW3BL 4.5 in.; FA128647 arithmetic implies 3 in.)	B	same as above
Status	obsolete, NLA, no replacement; Schneider suggests local sheet-metal fabrication	A	S105, S106, S104 oem_spec
Aftermarket / reproduction	Fabricated filler plates (local sheet metal shop) per OEM suggestion	A	S104 oem_spec
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, Mounting-hole pattern, Material		
Open question	*Obtain an original QW1BL/QW3BL for reverse-engineering (dimensions, hole pattern, gauge) - strong remanufacture candidate*		

EDH-SQD-00114	QW3BL	Square D	filler-plate	OBSOLETE, NLA, NO REPL

Legacy QW interior blank filler QW3BL

OEM part number	QW3BL	A	S105, S106 oem_spec
Description	Blank filler plate for old-design (QW) QMB interior, 3 in. (FAQ FA128647: one QW1BL + one QW3BL fill 4.5 in.) (FA122651 summary called QW3BL 4.5 in.; FA128647 arithmetic implies 3 in.)	B	same as above
Status	obsolete, NLA, no replacement; Schneider suggests local sheet-metal fabrication	A	S105, S106, S104 oem_spec
Aftermarket / reproduction	Fabricated filler plates (local sheet metal shop) per OEM suggestion	A	S104 oem_spec
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, Mounting-hole pattern, Material		
Open question	*Obtain an original QW1BL/QW3BL for reverse-engineering (dimensions, hole pattern, gauge) - strong remanufacture candidate*		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00106	**QMB306EX**	QMB plug-on extension assembly QMB306EX (legacy QW retrofit)	—	unknown
EDH-SQD-00107	**QMB306LEX**	QMB plug-on extension assembly QMB306LEX (legacy QW retrofit)	—	unknown
EDH-SQD-00108	**QMB310EX**	QMB plug-on extension assembly QMB310EX (legacy QW retrofit)	—	unknown
EDH-SQD-00109	**QMB310LEX**	QMB plug-on extension assembly QMB310LEX (legacy QW retrofit)	—	unknown
EDH-SQD-00110	**QMB320EX**	QMB plug-on extension assembly QMB320EX (legacy QW retrofit)	—	unknown

EDH-SQD-00106	QMB306EX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB306EX (legacy QW retrofit)

OEM part number	QMB306EX	A	S103 oem_spec
Description	Plug-on extension assembly for QW (38 in.) interiors used with QMB362T replacing QMB3606T	A	same as above
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S103 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00107	QMB306LEX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB306LEX (legacy QW retrofit)

OEM part number	QMB306LEX (Seen via search summary of Schneider FAQ only)	C	S98 oem_spec
Description	Plug-on extension kit for QW interiors (flat bus) used with QMB321T / QMB322TD replacing QMB303T / QMB306T	C	same as above
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S98 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00108	QMB310EX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB310EX (legacy QW retrofit)

OEM part number	QMB310EX	A	S105 oem_spec
Description	Plug-on extension assembly for QW (38 in., flatwise bus) interiors; used with QMB3400LA and QMB3300LA breaker units	A	S105, S104, S106, S110 oem_spec
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S105, S104, S106, S110 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00109	QMB310LEX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB310LEX (legacy QW retrofit)

OEM part number	QMB310LEX	A	S101 oem_spec
Description	Plug-on extension assembly for QW interiors with flat bus bars; used with QMB323TD replacing QMB310T / QMB210T	A	S101, S109 oem_spec
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S101, S109 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00110	QMB320EX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB320EX (legacy QW retrofit)

OEM part number	QMB320EX	A	S102 oem_spec
Alternate / superseded numbers	QMB-320-EX [alias]	A	same as above
Description	Plug-on extension kit for QW panelboards/switchboards used with QMB364 replacing QMB3620 (printed 'QMB-320-EX')	A	same as above
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S102 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00101	**QMB210T**	Legacy QMB switch QMB210T (obsolete)	—	obsolete
EDH-SQD-00104	**QMB2240**	Legacy QMB switch QMB2240 (obsolete)	—	obsolete
EDH-SQD-00135	**QMB303T**	Legacy QMB switch QMB303T (obsolete)	—	obsolete
EDH-SQD-00136	**QMB306T**	Legacy QMB switch QMB306T (obsolete)	—	obsolete
EDH-SQD-00100	**QMB310T**	Legacy QMB switch QMB310T (obsolete)	—	obsolete
EDH-SQD-00117	**QMB323TD**	QMB replacement switch QMB323TD for legacy interiors	—	unknown
EDH-SQD-00103	**QMB3240**	Legacy QMB switch QMB3240 (obsolete)	—	obsolete
EDH-SQD-00105	**QMB3260**	Legacy QMB switch QMB3260 (obsolete)	—	obsolete
EDH-SQD-00099	**QMB3606T**	Legacy QMB switch QMB3606T (obsolete)	—	obsolete
EDH-SQD-00102	**QMB3620**	Legacy QMB switch QMB3620 (obsolete)	—	obsolete

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00115	**QMB362T**	QMB replacement switch QMB362T for legacy interiors	—	unknown
EDH-SQD-00116	**QMB364**	QMB replacement switch QMB364 for legacy interiors	—	unknown
EDH-SQD-00134	**QMB3640**	Legacy QMB switch QMB3640 (obsolete)	—	obsolete

EDH-SQD-00101 **QMB210T** Square D other **OBSOLETE**

Legacy QMB switch QMB210T (obsolete)

OEM part number	QMB210T	A	S109 oem_spec
Description	Legacy QMB fusible switch, Series 1-4	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	QM (31 in., 1961-Oct 1984) or QW (pre-1984): QMB323TD in outside poles; QW with flat bus may need QMB310LEX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00104 **QMB2240** Square D other **OBSOLETE**

Legacy QMB switch QMB2240 (obsolete)

OEM part number	QMB2240	A	S106 oem_spec
Description	Legacy QMB fusible switch 2P 400 A, Series 1-4	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No direct switch; QMB3400LA 3P 400 A breaker unit (QMB interiors 1961-Oct 1984); QMB310EX for QW; QW1BL/QW3BL fillers obsolete	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00135 **QMB303T** Square D other **OBSOLETE**

Legacy QMB switch QMB303T (obsolete)

OEM part number	QMB303T (Seen via search-engine summary of Schneider FAQ; direct page not retrieved)	C	S98 oem_spec
Description	Legacy QMB fusible switch	D	S98 inference
Status	obsolete	C	S98 oem_spec
Replacement / successor	QMB321T (+ QMB306LEX in QW interior 1961-Oct 1984); QMB321T cannot go in QM pre-1961 or current Series E1 interiors	C	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, ratings		

EDH-SQD-00136 **QMB306T** Square D other **OBSOLETE**

Legacy QMB switch QMB306T (obsolete)

OEM part number	QMB306T (Seen via search-engine summary of Schneider FAQ; direct page not retrieved)	C	S98 oem_spec
Description	Legacy QMB fusible switch, Series 1	D	S98 inference
Status	obsolete	C	S98 oem_spec
Replacement / successor	QMB322TD in QMB interiors 1961-Oct 1984; QMB306LEX for QW with flat bus	C	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, ratings		

EDH-SQD-00100	QMB310T	Square D	other	OBSOLETE

Legacy QMB switch QMB310T (obsolete)

OEM part number	QMB310T	A	S101 oem_spec
Description	Legacy QMB fusible switch, Series 1-4	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No replacement if round bus bars; QM (31 in., 1961-Oct 1984) or QW (38 in., pre-1984): QMB323TD (use outside poles); QW flat bus may also need QMB310LEX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00117	QMB323TD	Square D	other	STATUS UNKNOWN

QMB replacement switch QMB323TD for legacy interiors

OEM part number	QMB323TD	A	S101 oem_spec
Description	Replacement switch for QMB310T/QMB210T on QM (31 in.) 1961-Oct 1984 or QW pre-1984 interiors; use outside poles	A	S101, S109, S92 oem_spec
Application	branch retrofit into legacy QMB interiors	A	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, ratings		
Open question	*Is QMB323TD a distinct current catalog number or shorthand for the W-suffix current unit (e.g. QMB362TW / QMB364W / QMB323TW)?*		

EDH-SQD-00103	QMB3240	Square D	other	OBSOLETE

Legacy QMB switch QMB3240 (obsolete)

OEM part number	QMB3240	A	S105 oem_spec
Description	Legacy QMB branch switch, occupied 12 in.	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No renewal parts; replace with QMB3400LA (7.5 in.) + QMB310EX + QW1BL and QW3BL fillers (obsolete; fabricate)	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00105	QMB3260	Square D	other	OBSOLETE

Legacy QMB switch QMB3260 (obsolete)

OEM part number	QMB3260	A	S104 oem_spec
Description	Legacy QMB fusible switch 600 A (pre-1984), occupied 15 in.	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	600 A fusible no longer available; if load allows 400 A breaker use QMB3400LA (7.5 in.) + QMB310EX; old-design fillers obsolete - fabricate locally	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00099	QMB3606T	Square D	other	OBSOLETE

Legacy QMB switch QMB3606T (obsolete)

OEM part number	QMB3606T	A	S103 oem_spec
Description	Legacy QMB fusible twin switch unit, 3P 600 V 60 A (Series 1-4 'Saflex')	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No replacement on QM interior (31 in.) built before 1961; QM 1961-1984: QMB362T; QW (38 in.) pre-1984: QMB362T + QMB306EX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		
Open question	*Surplus listings disagree on QMB3606T series (Series 2 vs Series 4)*		

EDH-SQD-00102	QMB3620	Square D	other	OBSOLETE

Legacy QMB switch QMB3620 (obsolete)

OEM part number	QMB3620	A	S102 oem_spec
Description	Legacy QMB fusible switch (pre-1984 panelboards)	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	Pre-1961 interior: none; 1961-1984: QMB364; QW panelboard/switchboard also needs QMB-320-EX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00115	QMB362T	Square D	other	STATUS UNKNOWN

QMB replacement switch QMB362T for legacy interiors

OEM part number	QMB362T	A	S103 oem_spec
Description	Replacement QMB fusible switch named for QMB3606T (QM 1961-1984, or QW with QMB306EX)	A	same as above
Application	branch retrofit into legacy QMB interiors	A	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, ratings		
Open question	*Is QMB362T a distinct current catalog number or shorthand for the W-suffix current unit (e.g. QMB362TW / QMB364W / QMB323TW)?*		

EDH-SQD-00116	QMB364	Square D	other	STATUS UNKNOWN

QMB replacement switch QMB364 for legacy interiors

OEM part number	QMB364	A	S102 oem_spec
Description	Replacement switch named for QMB3620 (1961-1984; QW needs QMB-320-EX)	A	same as above
Application	branch retrofit into legacy QMB interiors	A	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, ratings		
Open question	*Is QMB364 a distinct current catalog number or shorthand for the W-suffix current unit (e.g. QMB362TW / QMB364W / QMB323TW)?*		

EDH-SQD-00134	QMB3640	Square D	other	OBSOLETE

Legacy QMB switch QMB3640 (obsolete)

OEM part number	QMB3640 (Seen via search-engine summary of Schneider FAQ; direct page not retrieved)	C	S98 oem_spec
Description	Legacy QMB fusible switch (3P 400 A implied by numbering - unverified)	D	S98 inference
Status	obsolete	C	S98 oem_spec
Replacement / successor	QM 1961-1984: QMB3400LA; QW: QMB3400LA + QMB310EX; QM pre-1961: none	C	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, ratings		

4.4 QED-2 — Power-Style QED-2 Switchboard

FAM-SQD-001 · switchboard · aka QED2, QED 2, Power-Style QED-2, QED-2 Series 2, QED-2/S · markings: Square D, Schneider Electric

Free-standing UL 891 low-voltage switchboard, 91.5 in. high with base channels, front or front-and-rear accessible, NEMA 1 or 3R. Distribution is by group-mounted I-Line plug-on breaker sections (interiors up to 3000 A single-row / 2000 A double-row) or QMB/QMJ fusible switch sections, plus individually mounted PowerPact M/P/R, Masterpact NW or Bolt-Loc BP mains/feeders. Adding sections later requires the through-bus construction with splice-plate extensions; through bus sits at top, middle or bottom at 19.5, 27.5 or 36.0 in. from the front.

Attribute	Value	Cl.	Sources
Status	current (2700CT1101 v02 dated 2025-12 listed on se.com; OEM interiors catalog 2700CT1601 v1.3 2023-01) (Status inferred from current document listings; documents themselves not retrieved)	B	S88, S94 oem_spec
Era of manufacture	Catalog 2700CT1101 copyright 1995-2012; 'connect to existing' list names generations QED-2/S, QED-2 Series 2, QED-3, QED-4	A	S63 p. 1, p. 9; oem_spec
Voltage rating	600 Vac or 250 Vdc max	A	S63 p. 3; oem_spec
Main ampacity	Sections to 5000 A horizontal bus, 3000 A vertical bus; single mains to 5000 A; six subdivision mains to 4000 A; individually mounted feeders to 4000 A	A	same as above
Branch breakers accepted	Group-mounted I-Line: FA, FH, HD, HG, HJ, HL, QB, QD, QG, QJ, JD, JG, JJ, JL, LA, LH, LC, LI, FI, KI, MG, MJ, PG, PK, PJ, PL (and -C 100% variants), RG-C, RK-C, RJ-C, RL-C; group-mounted QMB/QMJ fusible switches 30-1200 A	A	S63 pp. 22, 29; oem_spec
Dimensions	Height 91.5 in. (2324 mm) with base channels; section widths 12, 24, 30, 36, 42, 48, 54 in.; frame depths 24, 36, 48, 54, 60 in.; NEMA 3R adds 11.50 in. front and 0.50 in. rear	A	S63 pp. 3, 24; oem_spec
i_line_interiors	Full-height I-Line distribution: 2000 A interiors (36/42/48 in. W; mounting space 54 or 72 in.) and 3000 A interior (54 in. W, L=72 in., R=40.5 in., min depth 36 in.)	A	S63 p. 23; oem_spec
i_line_section_limits	Max I-Line interior 3000 A, single row only; double-row interiors 2000 A max; no 4000 A I-Line section (Schneider FAQ seen via search summary)	B	S88 oem_spec
qmb_sections	Group-mounted QMB switch sections: 36 in. W max switch 400 A; 42 in. W 1200 A; 48 in. W (2) 1200 A; interior 2000 A (36/42 in.) or 3000 A (48 in.); 42 in. main switch connector access space	A	S63 pp. 25, 29; oem_spec
qmb_mount_height	QED-2 Series 2 eliminated the 72 in. QMB switch mounting height option; 63 in. is standard (Schneider FAQ via search summary)	B	S88 oem_spec
through_bus	Connect-to-existing data needed: factory order number, equipment type (QED-2/S, QED-2 Series 2, QED-3, QED-4, special), through-bus location top/middle/bottom, bus bar size 1.5 or 2.0 in. if <=2000 A, through-bus depth 19.5/27.5/36.0 in.	A	S63 p. 9; oem_spec
splice	Stand-alone QED switchboards have no through-bus feature; only boards built with through-bus construction and splice-plate extensions can have sections added	A	S85 oem_spec
bottom	All QED-2 switchboards (NEMA 1 or 3R) ship with bottom open; bottom closure plates are an order adder	A	S86 oem_spec

Breaker families associated: FA / FH (I-Line), H-frame HD/HG/HJ/HL/HR (I-Line), I-Limiter FI / KI / LI (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line), LA / LH (I-Line), LC (I-Line, 600 A), M-frame MG/MJ (I-Line), P-frame PG/PJ/PK/PL (I-Line), PowerPact L-frame LD/LG/LJ/LL/LR (I-Line), Q-frame QB/QD/QG/QJ (I-Line), QMB circuit breaker units (H-, J-, L-frame), R-frame RG/RJ/RK/RL (I-Line)

Key documents: S63 2700CT1101 Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switc; S85 FA121592 FAQ FA121592: Are Square D QED switchboards able to have additional (splice-to) sections i; S86 FA308905 FAQ FA308905: Do QED 2 switchboards NEMA 1 or 3R come with a solid bottom?; S88 FAQ000279508 / FAQ000257217 Square D QMB / QED-2 FAQ group (QED-2 Series 2 QMB mounting height 63 in.; QED-2 I-Line se; S94 2700CT1601 OEM QED-2 Switchboard I-Line Interiors, Single-Row and Double-Row OEM Interior Products Ca; S95 80043-055-16 Power-Style QED-2 Switchboards Instruction Bulletin

Also fits this family (entry printed elsewhere): QMB221TW, QMB221HW, QMB222TW, QMB222HW, QMB223TW, QMB223HW, QMB224W, QMB225W, QMB225WT3, QMB321TW, QMB321HW, QMB322TW, QMB322HW, QMB323TW, QMB323HW, QMB324W, QMB325W, QMB325WT3, QMB326W, QMB326WT3, QMB327WT3, QMB261TW, QMB261HW, QMB262TW, QMB262HW, QMB263TW, QMB263HW, QMB264W, QMB361TW, QMB361HW, QMB362TW, QMB362HW, QMB362T21W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMB364W, QMB365W, QMB365WT6, QMB366W, QMB367W, QMJ361T, QMJ362T, QMJ363T, QMJ363H, QMJ364T, QMJ364H, QMJ365, QMJ366, HRK30, QMB36R, QMB60R, QMB100R, HRK1020, QMB4060R, QMB600T6, QMB800T6, QMB300EK, QMB610EK, QMB200EK, 40251-016-51, 40256-034-50, 40251-018-50, 40256-014-50, 40251-162-50, 40560-270-50, 40256-039-50, VCEL030516H1, VCEL05012H1, VCEL07512H1, VCEL02114S1, VCELC02114S1, VCELC03038H1, VCELC05012H1, VCELC07512H1, VCEL06012H1, AL150HD, AL175JD, AL250JD, AL400LA, CU150HD, CU250JD, CU400LA, QMB1BLW, QMB3BLW, QMB6BLW, QMB15BLW, QMB1IMA_, QMB2IMA_, QMB3IMA_, QMB4IMA_, QMB8IMA_, 4052021450, 4052017302, 2330241601, 4052021650, 4020506501, 4028343750, 4025101851, 2342702001, 4052031850, 4052085601, 4052036750, 2142720241, 4052098601, 4028343550, 2342702400, 4028343250, HNM1BL, HNM4BL, HLN1BL, HLN4BL, HLN4EBL, HLW1BL, HLW4BL, HLW4EBL, 21593-20100, SL250, SL400, SL800M5, SL1200P5, SL1200P6, SL1200P7, S33930, HQO306, 21590-20241, 2152620361

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00069	**40251-287-50**	QMB/QMJ switch terminal lug 40251-287-50	QMB225W, QMB325W, QMB326W, QMB365W, QMB366W, QMB327WT3, QMB367W **A**	unknown

EDH-SQD-00069	40251-287-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-287-50

OEM part number	40251-287-50	A	S65, S100 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, 3/0 AWG-600 kcmil (2 per phase at 400/600 A, 3 per phase at 800 A)	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
	Lug assembly	A	S100 oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S65 oem_spec
	renewal part (field replaceable)	A	S100 oem_spec
Installation location	Load-side terminals of switch unit	C	S65 inference
Breaker compatibility	QMB225W, QMB325W, QMB326W, QMB365W, QMB366W, QMB327WT3, QMB367W	A	S65 Table 5, pp. 12-13; Table 7; oem_spec
	QMB367W, Series E1 (E01)	A	S100 oem_spec
Kit contents	Quantity: 1 per lug	A	same as above
Cross-links	Families: QED-2, QMB		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material, quantity per package, Torque values		

Interior

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00176	**CF16RJ63C36**	OEM QED-2 I-Line switchboard interior CF16RJ63C36	—	unknown
EDH-SQD-00172	**CF20R63C**	OEM QED-2 I-Line switchboard interior CF20R63C	—	unknown
EDH-SQD-00174	**CF20RJ63C**	OEM QED-2 I-Line switchboard interior CF20RJ63C	—	unknown
EDH-SQD-00173	**CF25R63C**	OEM QED-2 I-Line switchboard interior CF25R63C	—	unknown
EDH-SQD-00175	**CF30RJ63C**	OEM QED-2 I-Line switchboard interior CF30RJ63C	—	unknown

EDH-SQD-00176	CF16RJ63C36	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF16RJ63C36

OEM part number	CF16RJ63C36	C	S91 distributor
Description	1600 A double-row center-fed copper interior, 63 in. high, 48 in. W	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S91, S94 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S91 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00172	CF20R63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF20R63C

OEM part number	CF20R63C	C	S91 distributor
Description	2000 A single-row center-feed copper I-Line switchboard interior, 63 in.; listing as CF20R63C36: 36 in. W, 36 in. D, 1200 A left-side max frame	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S91, S94 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S91 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00174	CF20RJ63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF20RJ63C

OEM part number	CF20RJ63C	C	S91 distributor
Description	2000 A double-row copper I-Line interior, 63 in. high, 24 in. D, 48 in. W; right side to 250 A, left side to 1200 A frames	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S91, S94 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S91 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00173	CF25R63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF25R63C

OEM part number	CF25R63C	C	S91 distributor
Description	2500 A single-row copper I-Line switchboard interior, 63 in., 24 in. depth (Rexel: 'SWITCHBOARD INT CU I-LINE SR 2500A')	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S91, S94 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S91 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00175	CF30RJ63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF30RJ63C

OEM part number	CF30RJ63C	C	S91 distributor
Description	Listed by Rexel as 'Panelboard interior QED-2 I-Line 63 height 3000A copper bus center feed', 54 in. W, 24 in. D (double-row per listing - conflicts with OEM FAQ that 3000 A is single-row only)	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S91, S94 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S91 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00165	**8000602003**	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602003: Hinge frame leaf	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as
EDH-SQD-00166	**8023317701**	NEMA 3R QED-2/CMM/Speed-D door hinge part 8023317701: Hinge door leaf	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as

EDH-SQD-00165 **8000602003** Square D hardware-kit **ORDERABLE VIA DISTRIBU**

NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602003: Hinge frame leaf

OEM part number	8000602003	**A**	S83 oem_spec
Description	Hinge frame leaf; NEMA 3R door hinge set - 4 sets per N3R door	**A**	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	**A**	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	**A**	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00166 **8023317701** Square D hardware-kit **ORDERABLE VIA DISTRIBU**

NEMA 3R QED-2/CMM/Speed-D door hinge part 8023317701: Hinge door leaf

OEM part number	8023317701	**A**	S83 oem_spec
Description	Hinge door leaf; NEMA 3R door hinge set - 4 sets per N3R door	**A**	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	**A**	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	**A**	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00163	**21427-20401**	QED cover screw 21427-20401	—	unknown
EDH-SQD-00169	**2150720200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2150720200: Door leaf bolt (2 per set)	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as
EDH-SQD-00168	**2271020200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2271020200: Frame leaf bolt (2 per set)	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as
EDH-SQD-00170	**2300100200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2300100200: Nut	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as
EDH-SQD-00171	**2370100200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2370100200: Washer	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as
EDH-SQD-00167	**8000602001**	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602001: Hinge pin	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as

EDH-SQD-00163 **21427-20401** Square D fastener **STATUS UNKNOWN**

QED cover screw 21427-20401

OEM part number	21427-20401 (OEM FAQ text seen only via search snippets)	**B**	S81 oem_spec
Description	1/4-20 x 1-1/4 in. self-tapping screw fastening cover plates to front of QED switchboard	**B**	same as above
Cross-links	Families: QED-2		
Not yet documented	Finish / plating, head style		

EDH-SQD-00169	2150720200	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2150720200: Door leaf bolt (2 per set)

OEM part number	2150720200	A	S83 oem_spec
Description	Door leaf bolt (2 per set); NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00168	2271020200	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2271020200: Frame leaf bolt (2 per set)

OEM part number	2271020200	A	S83 oem_spec
Description	Frame leaf bolt (2 per set); NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00170	2300100200	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2300100200: Nut

OEM part number	2300100200	A	S83 oem_spec
Description	Nut; NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00171	2370100200	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2370100200: Washer

OEM part number	2370100200	A	S83 oem_spec
Description	Washer; NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00167	8000602001	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602001: Hinge pin

OEM part number	8000602001	A	S83 oem_spec
Description	Hinge pin; NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00164	**50552-108-01**	NEMA 3R QED-2 switchboard replacement door handle 50552-108-01	—	unknown
EDH-SQD-00162	**80031-024-02**	QED plug-button for unused holes 80031-024-02	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00043	**QMB368W**	QMB fusible switch unit QMB368W (3P 600 Vac, 1200 A, 24 in.)	1200 A branch switch or group-mounted six-disconnect main with Class L A	unknown

EDH-SQD-00164	50552-108-01	Square D	other	STATUS UNKNOWN

NEMA 3R QED-2 switchboard replacement door handle 50552-108-01

OEM part number	50552-108-01	A	S82 oem_spec
Description	Replacement handle for outdoor (NEMA 3R) QED-2 switchboard	A	same as above
Cross-links	Families: QED-2		
Not yet documented	Dimensions, lockable		

EDH-SQD-00162	80031-024-02	Square D	other	STATUS UNKNOWN

QED plug-button for unused holes 80031-024-02

OEM part number	80031-024-02	A	S80 oem_spec
Description	Plug-button that seals/plugs unused holes in NEMA 1 and 3R QED-1 and QED-2 switchboards, including Speed-D	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	hole diameter, Material		

EDH-SQD-00043	QMB368W	Square D	other	STATUS UNKNOWN

QMB fusible switch unit QMB368W (3P 600 Vac, 1200 A, 24 in.)

OEM part number	QMB368W	A	S107 oem_spec
Description	1200 A QMB fusible switch; 3-pole, 600 Vac max, 24 in. unit (distributor) (Ratings/height from distributor; existence/restriction from OEM FAQ)	B	S107, S92 oem_spec
Application	Restricted to QED-2 switchboards with 42 in. (qty 1) and 48 in. (qty 2) wide QMB distribution sections; cannot be installed in QMB panelboards	A	S107 oem_spec
Breaker compatibility	1200 A branch switch or group-mounted six-disconnect main with Class L fuses, 100 kA at 600 Vac; a single 1200 A main switch must be Bolt-Loc	A	S63 p. 29 note c; oem_spec
Kit contents	(4) #3/0-600 kcmil per phase	A	S63 p. 29; oem_spec
Dimensions	Mounting height 24 in. (610 mm) for 1200 A single switch in QED-2	A	same as above
Cross-links	Families: QED-2		
Not yet documented	horsepower ratings, renewal parts		

4.5 SPEED-D — Speed-D Merchandised Service Section Switchboard

FAM-SQD-002 · switchboard · aka Speed D, SpeedD · markings: Square D

Merchandised (quick-ship) service-section switchboard family covered in the same catalog as QED-2 (Class 2741/2742). Speed-D boards with provisions for current-series QMB branch devices ship with (2) 15 in. QMB15BLW closing plates.

Attribute	Value	Cl.	Sources
Era of manufacture	In 2700CT1101 (2012)	A	S63 p. 47; oem_spec
qmb_fillers	Furnished with (2) 15 in. closing plates QMB15BLW; other closing plates QMB1BLW, QMB3BLW, QMB6BLW	A	S68 oem_spec

Key documents: S63 2700CT1101 Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switc; S68 FA225625 FAQ FA225625: Do the merchandised Speed-D switchboards with QMB branch devices come with b

Also fits this family (entry printed elsewhere): QMB221TW, QMB221HW, QMB222TW, QMB222HW, QMB223TW, QMB223HW, QMB224W, QMB225W, QMB225WT3, QMB321TW, QMB321HW, QMB322TW, QMB322HW, QMB323TW, QMB323HW, QMB324W, QMB325W, QMB325WT3, QMB326W, QMB326WT3, QMB327WT3, QMB261TW, QMB261HW, QMB262TW, QMB262HW, QMB263TW, QMB263HW, QMB264W, QMB361TW, QMB361HW, QMB362TW, QMB362HW, QMB362T21W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMB364W, QMB365W, QMB365WT6, QMB366W, QMB367W, QMB1BLW, QMB3BLW, QMB6BLW, QMB15BLW, 80031-024-02, 8000602003, 8023317701, 8000602001, 2271020200, 2150720200, 2300100200, 2370100200

5 GE / ABB lineage

Lineage / brand markings: General Electric Industrial Solutions; ABB from 2018; ReliaGear

Family	Type	Status	Era	Entries	Pg
A-SERIES A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	panelboard	current as of BuyLog 07/2014	—	62	295
A-SERIES-COL A-Series Column Panelboards (ALC, AQC, AEC)	panelboard	unknown	—	6	312
A-SERIES-PWR A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	panelboard	current as of BuyLog 07/2014	—	35	312
CCB-QMR Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	panelboard	Renewal parts still listed 2014; QMR fusible switches 'Limited availability. Obsolete when inventory depleted.'	—	20	325
NHB NAB / NHB bolt-on panelboards (legacy)	panelboard	discontinued (legacy); hardware sold as new-surplus	—	1	330
RG-NEXT ReliaGear neXT Power Panelboards	panelboard	unknown	—	0	331
SCP-PLUS Spectra Series Type SCP Plus panelboards	panelboard	unknown	—	15	331
SPECTRA-PP Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	panelboard	Listed as current in 2014 BuyLog; a 2021/2022 ABB BuyLog TOC reportedly labels Spectra bolt-on mounting hardware 'obsoleted'	—	147	336
AV-LINE AV-Line switchboards (legacy)	switchboard	unknown	—	0	396

5.1 A-SERIES — A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)

FAM-GEA-001 · panelboard · aka A Series, A-Series II, AQ, AE, AS, AL, AD, AD Plus, AQF, AEF, Pro-Stock · markings: GE, General Electric, GE Industrial Solutions, ABB

GE's lighting/appliance panelboard platform. Symmetrical 20 in wide x 5.81 in deep galvanized boxes with removable endwalls, branch-bus direct connection and captive branch hardware. Type letter indicates breaker family: AL = plug-in Q-line, AQ = bolt-on Q-line (THQB), AE = bolt-on E-frame (TEY) 480Y/277 V, AD = 600 V TED/SE/FB. Pro-Stock unassembled interiors (AQU/AEU) are completed with MB main breaker kits, ML main lug kits and NK neutral kits. Pages in the 2014 BuyLog are headed 'A-Series II' on the column-panel kit page.

Attribute	Value	Cl.	Sources
Status	current as of BuyLog 07/2014	A	S16 p.11-1; oem_spec
Voltage rating	AL/AQ 240 Vac max; AE/AS 480Y/277 Vac, 125/250 Vdc; AD 600 Vac	A	S16 p.11-4 to 11-6; oem_spec
Main ampacity	Main lug 125-800 A (AD 150-800 A); main breaker up to 800 A (SK)	A	S16 p.11-4, 11-5, 11-6; oem_spec
Branch breakers accepted	AL plug-in THQL/THHQL/TXQL; AQ bolt-on THQB/THHQB/TXQB; AE bolt-on TEY/TEYF/TEYD/TEYH/TEYL; AD bolt-on TED/THED/SE/FB; subfeeds TQD/THQD (AQ) or TED/TFJ/SE/SF (AE/AD)	A	S16 p.11-4 to 11-6; oem_spec
Dimensions	Box width 20 in, depth 5.81 in; lengths 25.5-88.5 in	A	S16 p.11-4; oem_spec
seismic	IBC Zone 3/4 and CBC Zone 4 certified	A	S16 p.11-3; oem_spec

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, TFJ / TFK / THFK / TFL, THQB / THHQB / TXQB, THQL / THHQL / TXQL, TJD / TJJ / TJK / THJK, TQD / THQD

Key documents: S16 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S17 BuyLog p.11-10 Rev. 11/13 GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Pa

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00059	**MB133**	A-Series Pro-Stock main/sub-feed breaker kit MB133	TED (18k) / THED (22k); SEHA/SELA/SEPA **A**	unknown
EDH-GEA-00060	**MB133WB**	A-Series Pro-Stock main/sub-feed breaker kit MB133WB	SEHA + kit (breaker included) **A**	unknown
EDH-GEA-00051	**MB233**	A-Series Pro-Stock main/sub-feed breaker kit MB233	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00053	**MB2332**	A-Series Pro-Stock main/sub-feed breaker kit MB2332	2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only) **A**	unknown
EDH-GEA-00054	**MB2332WB**	A-Series Pro-Stock main/sub-feed breaker kit MB2332WB	2nd SFHA + kit (breaker included) **A**	unknown
EDH-GEA-00052	**MB233WB**	A-Series Pro-Stock main/sub-feed breaker kit MB233WB	SFHA + kit (breaker included) **A**	unknown
EDH-GEA-00045	**MB332**	A-Series Pro-Stock main/sub-feed breaker kit MB332	SGHA (65k), SGLA (100k), SGPA (200k) **A**	unknown
EDH-GEA-00046	**MB332WB**	A-Series Pro-Stock main/sub-feed breaker kit MB332WB	SGHA + kit (breaker included) **A**	unknown
EDH-GEA-00055	**MB333**	A-Series Pro-Stock main/sub-feed breaker kit MB333	SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00056	**MB333WB**	A-Series Pro-Stock main/sub-feed breaker kit MB333WB	SGHA + kit (breaker included) **A**	unknown
EDH-GEA-00057	**MB423**	A-Series Pro-Stock main/sub-feed breaker kit MB423	TEY (14k) **A**	unknown
EDH-GEA-00058	**MB426**	A-Series Pro-Stock main/sub-feed breaker kit MB426	(2) TEY **A**	unknown
EDH-GEA-00044	**MB512**	A-Series Pro-Stock main/sub-feed breaker kit MB512	TQD (10k) / THQD (22k) **A**	unknown
EDH-GEA-00049	**MB513**	A-Series Pro-Stock main/sub-feed breaker kit MB513	TQD / THQD **A**	unknown
EDH-GEA-00050	**MB516**	A-Series Pro-Stock main/sub-feed breaker kit MB516	(2) TQD / (2) THQD **A**	unknown
EDH-GEA-00042	**MB612**	A-Series Pro-Stock main/sub-feed breaker kit MB612	THQB (10k) / THHQB (22k) **A**	unknown
EDH-GEA-00047	**MB613**	A-Series Pro-Stock main/sub-feed breaker kit MB613	THQB / THHQB **A**	unknown
EDH-GEA-00043	**MB614**	A-Series Pro-Stock main/sub-feed breaker kit MB614	(2) THQB / (2) THHQB **A**	unknown
EDH-GEA-00048	**MB616**	A-Series Pro-Stock main/sub-feed breaker kit MB616	(2) THQB / (2) THHQB **A**	unknown

EDH-GEA-00059	**MB133**	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB133

OEM part number	MB133	**A**	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 150 A, 3 poles; breakers: TED (18k) / THED (22k); SEHA/SELA/SEPA	**A**	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	**A**	S16 p.11-15 note; oem_spec
Breaker compatibility	TED (18k) / THED (22k); SEHA/SELA/SEPA	**A**	S16 p.11-15; oem_spec
Poles	3	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	Breaker not included	**A**	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00060	MB133WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB133WB

OEM part number	MB133WB	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 150 A, 3 poles; breakers: SEHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SEHA + kit (breaker included)	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	150 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00051	MB233	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB233

OEM part number	MB233	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V and AEU3 480/277V 3ph interior, 225 A, 3 poles; breakers: SFHA, SFLA, SFPA	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00053	MB2332	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB2332

OEM part number	MB2332 (Printed 'MB23325'/'MB2332WB5' where trailing 5 is footnote 5 (6-pole subfeed))	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400 A, 6 poles; breakers: 2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only)	A	S16 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		
Open question	*Requires MB233 or MB233WB to achieve 6 poles of subfeed*		

EDH-GEA-00054	MB2332WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB2332WB

OEM part number	MB2332WB (Printed 'MB23325'/'MB2332WB5' where trailing 5 is footnote 5 (6-pole subfeed))	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400 A, 6 poles; breakers: 2nd SFHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	2nd SFHA + kit (breaker included)	A	S16 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		
Open question	*Requires MB233 or MB233WB to achieve 6 poles of subfeed*		

EDH-GEA-00052	MB233WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB233WB

OEM part number	MB233WB	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 225 A, 3 poles; breakers: SFHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SFHA + kit (breaker included)	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00045	MB332	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB332

OEM part number	MB332	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 400/600 A, 2 poles; breakers: SGHA (65k), SGLA (100k), SGPA (200k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SGHA (65k), SGLA (100k), SGPA (200k)	A	S16 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00046	MB332WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB332WB

OEM part number	MB332WB	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 600 A, 2 poles; breakers: SGHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SGHA + kit (breaker included)	A	S16 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	600 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00055	MB333	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB333

OEM part number	MB333	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400/600 A, 3 poles; breakers: SGHA, SGLA, SGPA	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SGHA, SGLA, SGPA	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00056	MB333WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB333WB

OEM part number	MB333WB	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 600 A, 3 poles; breakers: SGHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SGHA + kit (breaker included)	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	600 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00057	MB423	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB423

OEM part number	MB423	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 100 A, 3 poles; breakers: TEY (14k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	TEY (14k)	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00058	MB426	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB426

OEM part number	MB426	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 100 A, 6 poles; breakers: (2) TEY	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	(2) TEY	A	S16 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00044	MB512	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB512

OEM part number	MB512	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 225 A, 2 poles; breakers: TQD (10k) / THQD (22k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	TQD (10k) / THQD (22k)	A	S16 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00049	MB513	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB513

OEM part number	MB513	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 225 A, 3 poles; breakers: TQD / THQD	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	TQD / THQD	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00050	MB516	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB516

OEM part number	MB516	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 400 A, 6 poles; breakers: (2) TQD / (2) THQD	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	(2) TQD / (2) THQD	A	S16 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00042	MB612	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB612

OEM part number	MB612	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 100 A, 2 poles; breakers: THQB (10k) / THHQB (22k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	THQB (10k) / THHQB (22k)	A	S16 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00047	MB613	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB613

OEM part number	MB613	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 100 A, 3 poles; breakers: THQB / THHQB	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	THQB / THHQB	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00043	MB614	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB614

OEM part number	MB614	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 100 A, 4 poles; breakers: (2) THQB / (2) THHQB	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	(2) THQB / (2) THHQB	A	S16 p.11-15; oem_spec
Poles	4	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00048	MB616	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB616

OEM part number	MB616	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 100 A, 6 poles; breakers: (2) THQB / (2) THHQB	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	(2) THQB / (2) THHQB	A	S16 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00061	**MLA1**	A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)	—	unknown
EDH-GEA-00062	**MLA2**	A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00063	**MLA41**	A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)	—	unknown
EDH-GEA-00064	**MLA61**	A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)	—	unknown
EDH-GEA-00065	**MLA62**	A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)	—	unknown
EDH-GEA-00066	**MLR1**	A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)	—	unknown
EDH-GEA-00067	**MLR2**	A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)	—	unknown
EDH-GEA-00068	**MLR41**	A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)	—	unknown
EDH-GEA-00069	**MLR61**	A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)	—	unknown
EDH-GEA-00070	**MLT1**	A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)	—	unknown
EDH-GEA-00071	**MLT2**	A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)	—	unknown
EDH-GEA-00073	**MLT41**	A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)	—	unknown
EDH-GEA-00072	**MLT42**	A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)	—	unknown

EDH-GEA-00061	MLA1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)

OEM part number	MLA1	**A**	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure (mechanical), 225 A, standard	**A**	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	**A**	same as above
Current rating	225 A	**A**	same as above
Kit contents	Wire range 6-350 MCM	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00062	MLA2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)

OEM part number	MLA2	**A**	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 225 A, oversized 225 A; also 225 A dual main	**A**	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	**A**	same as above
Current rating	225 A	**A**	same as above
Kit contents	Wire range 1-600 MCM or (2) 1/0-250 MCM	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00063	MLA41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)

OEM part number	MLA41	**A**	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 400 A, standard	**A**	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	**A**	same as above
Current rating	400 A	**A**	same as above
Kit contents	Wire range 2-600 MCM or (2) 1/0-250 MCM	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00064	MLA61	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)

OEM part number	MLA61	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 600 A, standard 600 A; also 400 A dual main	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	600 A	A	same as above
Kit contents	Wire range (2) 2/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00065	MLA62	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)

OEM part number	MLA62	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 400/600 A, oversized	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Wire range 3/0-800 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00066	MLR1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)

OEM part number	MLR1	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 225 A, standard	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	225 A	A	same as above
Kit contents	Wire range 4-350 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00067	MLR2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)

OEM part number	MLR2	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 225 A, oversized	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	225 A	A	same as above
Kit contents	Wire range 1-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00068	MLR41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)

OEM part number	MLR41	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 400 A, standard	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400 A	A	same as above
Kit contents	Wire range 1-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00069	MLR61	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)

OEM part number	MLR61	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 400/600 A, standard 600 A; oversized 400 A	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Wire range (2) 2/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00070	MLT1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)

OEM part number	MLT1	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 225 A, standard	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	225 A	A	same as above
Kit contents	Wire range 2/0-300 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00071	MLT2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)

OEM part number	MLT2	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 225 A, oversized	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	225 A	A	same as above
Kit contents	Wire range 4/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00073	MLT41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)

OEM part number	MLT41	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 400 A, oversized	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400 A	A	same as above
Kit contents	Wire range 500-750 MCM (500 MCM Cu, 750 MCM Al)	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00072	MLT42	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)

OEM part number	MLT42	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 400 A, standard	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400 A	A	same as above
Kit contents	Wire range 250-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00038	**ASPFB12P**	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	—	listed 07/2014
EDH-GEA-00039	**ASPFB3P**	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	—	listed 07/2014
EDH-GEA-00036	**ASPTED3P**	A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE	—	listed 07/2014
EDH-GEA-00037	**ASPTQD3P**	A-Series Breaker mounting hardware kit, breaker type TQD/THQD	—	listed 07/2014

EDH-GEA-00038 **ASPFB12P** GE breaker-mounting-kit **LISTED 07/2014**

A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles

OEM part number	ASPFB12P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	**A**	S16 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	**A**	same as above
Application	branch (to mount breaker in existing space - footnote 1)	**A**	same as above
Kit contents	Mounting screws and washers only (footnote 2)	**A**	same as above
Status	listed 07/2014	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00039 **ASPFB3P** GE breaker-mounting-kit **LISTED 07/2014**

A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles

OEM part number	ASPFB3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	**A**	S16 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	**A**	same as above
Application	branch (to mount breaker in existing space - footnote 1)	**A**	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	**A**	same as above
Status	listed 07/2014	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00036 **ASPTED3P** GE breaker-mounting-kit **LISTED 07/2014**

A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE

OEM part number	ASPTED3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	**A**	S16 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type TED/THED4/SE	**A**	same as above
Application	branch (to mount breaker in existing space - footnote 1)	**A**	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	**A**	same as above
Status	listed 07/2014	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00037 **ASPTQD3P** GE breaker-mounting-kit **LISTED 07/2014**

A-Series Breaker mounting hardware kit, breaker type TQD/THQD

OEM part number	ASPTQD3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	**A**	S16 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type TQD/THQD	**A**	same as above
Application	branch (to mount breaker in existing space - footnote 1)	**A**	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	**A**	same as above
Status	listed 07/2014	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00074	**NKA**	A-Series 200% neutral kit NKA (225 A)	—	unknown
EDH-GEA-00075	**NKA42**	A-Series 200% neutral kit NKA42 (400 A)	—	unknown
EDH-GEA-00080	**NKA4FT**	A-Series 200% neutral kit NKA4FT (400 A)	—	unknown
EDH-GEA-00076	**NKR**	A-Series 200% neutral kit NKR (225 A)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00077	**NKR4**	A-Series 200% neutral kit NKR4 (400 A)	—	unknown
EDH-GEA-00078	**NKT**	A-Series 200% neutral kit NKT (225 A)	—	unknown
EDH-GEA-00079	**NKT4**	A-Series 200% neutral kit NKT4 (400 A)	—	unknown

EDH-GEA-00074	NKA	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKA (225 A)

OEM part number	NKA	A	S16 p.11-17; oem_spec
Description	200% neutral kit, Pressure lugs, 225 A	A	same as above
Current rating	225 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00075	NKA42	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKA42 (400 A)

OEM part number	NKA42	A	S16 p.11-17; oem_spec
Description	200% neutral kit, Pressure lugs, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00080	NKA4FT	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKA4FT (400 A)

OEM part number	NKA4FT	A	S16 p.11-17 footnote 2; oem_spec
Description	200% neutral kit, Pressure, 200% neutral feed-thru lugs, 400 A; wire range (2) 2/0-600 MCM or (4) 4-250 MCM; ref. GO-101P	A	S16 p.11-17; oem_spec
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00076	NKR	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKR (225 A)

OEM part number	NKR	A	S16 p.11-17; oem_spec
Description	200% neutral kit, Copper lugs, 225 A	A	same as above
Current rating	225 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00077	NKR4	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKR4 (400 A)

OEM part number	NKR4	A	S16 p.11-17; oem_spec
Description	200% neutral kit, Copper lugs, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00078	NKT	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKT (225 A)

OEM part number	NKT	**A**	S16 p.11-17; oem_spec
Description	200% neutral kit, Compression lugs, 225 A	**A**	same as above
Current rating	225 A	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00079	NKT4	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKT4 (400 A)

OEM part number	NKT4	**A**	S16 p.11-17; oem_spec
Description	200% neutral kit, Compression lugs, 400 A	**A**	same as above
Current rating	400 A	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00097	**EGS12**	A-Series Equipment ground, standard isolated/insulated, per 12 branch positions	—	unknown
EDH-GEA-00096	**TGL2**	A-Series Equipment ground, standard bonded to box, per 12 branch positions	—	unknown
EDH-GEA-00095	**TGL20**	A-Series Main lug for equipment ground terminal kits	—	unknown

EDH-GEA-00097	EGS12	GE	ground-bar	STATUS UNKNOWN

A-Series Equipment ground, standard isolated/insulated, per 12 branch positions

OEM part number	EGS12	**A**	S16, S17 p.11-19; p.11-10; oem_spec
Description	Equipment ground, standard isolated/insulated, per 12 branch positions	**A**	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00096	TGL2	GE	ground-bar	STATUS UNKNOWN

A-Series Equipment ground, standard bonded to box, per 12 branch positions

OEM part number	TGL2	**A**	S16, S17 p.11-19; p.11-10; oem_spec
Description	Equipment ground, standard bonded to box, per 12 branch positions ((11) 14-8 Cu/12-8 Al, (3) 14-4 Cu/6-4 Al)	**A**	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00095	TGL20	GE	ground-bar	STATUS UNKNOWN

A-Series Main lug for equipment ground terminal kits

OEM part number	TGL20	**A**	S16, S17 p.11-19; p.11-10; oem_spec
Description	Main lug for equipment ground terminal kits (6-2/0 Cu/Al)	**A**	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00089	**ASPAQLEBKT**	A-Series AQ/AL/AE rail bracket	—	unknown

EDH-GEA-00089	ASPAQLEBKT	GE	mounting-bracket	STATUS UNKNOWN

A-Series AQ/AL/AE rail bracket

OEM part number	ASPAQLEBKT	**A**	S16 p.11-20; oem_spec
Description	AQ/AL/AE rail bracket	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00087	**ASP25AD65KA**	A-Series AD 25 to 65 kAIC barrier kit	—	unknown

EDH-GEA-00087	ASP25AD65KA	GE	barrier	STATUS UNKNOWN

A-Series AD 25 to 65 kAIC barrier kit

OEM part number	ASP25AD65KA	**A**	S16 p.11-20; oem_spec
Description	AD 25 to 65 kAIC barrier kit	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00040	**TEDFP1**	A-Series filler plate for TQD/THQD/TED4/SE/FB	—	unknown
EDH-GEA-00041	**TQLFP1**	A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY	—	unknown

EDH-GEA-00040	TEDFP1	GE	filler-plate	STATUS UNKNOWN

A-Series filler plate for TQD/THQD/TED4/SE/FB

OEM part number	TEDFP1	**A**	S16 p.11-19; oem_spec
Description	TQD/THQD/TED4/SE/FB Filler Plates	**A**	same as above
Installation location	A-Series deadfront	**B**	S16 inference
Cross-links	Families: A-SERIES · Breakers: TQD / THQD, TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA), Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Material, Status		

EDH-GEA-00041	TQLFP1	GE	filler-plate	STATUS UNKNOWN

A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY

OEM part number	TQLFP1	**A**	S16, S17 p.11-19; p.11-10; oem_spec
Description	THQB/THHQB/THQL/THHQL/TEY Filler Plates; 'Filler Plate for Q Line and TEY Breakers'	**A**	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Material, Status		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00090	**139C5720G3**	A-Series AE front mounting kit	—	unknown
EDH-GEA-00091	**139C5720G6**	A-Series AQ/AL front mounting kit	—	unknown
EDH-GEA-00092	**139C5720G9**	A-Series AD front mounting kit	—	unknown
EDH-GEA-00081	**BNDKT**	A-Series Service entrance kit 225 A	—	unknown
EDH-GEA-00082	**BNDKT6**	A-Series Service entrance kit 400/600 A	—	unknown

EDH-GEA-00090	139C5720G3	GE	hardware-kit	STATUS UNKNOWN

A-Series AE front mounting kit

OEM part number	139C5720G3	**A**	S16 p.11-20; oem_spec
Description	AE front mounting kit	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00091	139C5720G6	GE	hardware-kit	STATUS UNKNOWN

A-Series AQ/AL front mounting kit

OEM part number	139C5720G6	**A**	S16 p.11-20; oem_spec
Description	AQ/AL front mounting kit	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00092	139C5720G9	GE	hardware-kit	STATUS UNKNOWN

A-Series AD front mounting kit

OEM part number	139C5720G9	**A**	S16 p.11-20; oem_spec
Description	AD front mounting kit	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00081	BNDKT	GE	hardware-kit	STATUS UNKNOWN

A-Series Service entrance kit 225 A

OEM part number	BNDKT	**A**	S16 p.11-17; oem_spec
Description	Service entrance kit 225 A (bonding strap with hardware and service entrance label)	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00082	BNDKT6	GE	hardware-kit	STATUS UNKNOWN

A-Series Service entrance kit 400/600 A

OEM part number	BNDKT6	**A**	S16 p.11-17; oem_spec
Description	Service entrance kit 400/600 A (bonding strap with hardware and SE label)	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00084	**APHBL**	A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	—	unknown
EDH-GEA-00083	**APHBQ**	A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	—	unknown
EDH-GEA-00086	**ASP2PTFJ3P**	A-Series 2P to 3P SF conversion kit for horizontal subfeed	—	unknown
EDH-GEA-00085	**ASP2PTQD3P**	A-Series 2P to 3P TQD conversion kit	—	unknown

EDH-GEA-00084	APHBL	GE	conversion-kit	STATUS UNKNOWN

A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels

OEM part number	APHBL	**A**	S16 p.11-20; oem_spec
Description	Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00083	APHBQ	GE	conversion-kit	STATUS UNKNOWN

A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels

OEM part number	APHBQ	A	S16 p.11-20; oem_spec
Description	Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00086	ASP2PTFJ3P	GE	conversion-kit	STATUS UNKNOWN

A-Series 2P to 3P SF conversion kit for horizontal subfeed

OEM part number	ASP2PTFJ3P	A	S16 p.11-20; oem_spec
Description	2P to 3P SF conversion kit for horizontal subfeed	A	same as above
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00085	ASP2PTQD3P	GE	conversion-kit	STATUS UNKNOWN

A-Series 2P to 3P TQD conversion kit

OEM part number	ASP2PTQD3P	A	S16 p.11-20; oem_spec
Description	2P to 3P TQD conversion kit	A	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00088	**TQDFM1**	A-Series 2-3 pole TQD mechanical interlock	—	unknown

EDH-GEA-00088	TQDFM1	GE	breaker-accessory	STATUS UNKNOWN

A-Series 2-3 pole TQD mechanical interlock

OEM part number	TQDFM1	A	S16 p.11-20; oem_spec
Description	2-3 pole TQD mechanical interlock	A	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00093	**APN48**	A-Series Permanent circuit number kit, Nos 1-48	—	unknown
EDH-GEA-00094	**APN84**	A-Series Permanent circuit number kit, Nos 43-84	—	unknown

EDH-GEA-00093	APN48	GE	other	STATUS UNKNOWN

A-Series Permanent circuit number kit, Nos 1-48

OEM part number	APN48	A	S16, S17 p.11-20; p.11-10; oem_spec
Description	Permanent circuit number kit, Nos 1-48 (AQ, AL, AE; AD version APN48AD)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00094	APN84	GE	other	STATUS UNKNOWN

A-Series Permanent circuit number kit, Nos 43-84

OEM part number	APN84	A	S16, S17 p.11-20; p.11-10; oem_spec
Description	Permanent circuit number kit, Nos 43-84 (AQ, AL, AE; AD version APN84AD)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

5.2 A-SERIES-COL — A-Series Column Panelboards (ALC, AQC, AEC)

FAM-GEA-003 · panelboard · aka ALC, AQC, AEC · markings: GE

Narrow column-type A-Series panels (8.62 in wide x 5.81 in deep). ALC plug-in Q-line, AQC bolt-on THQB, AEC bolt-on TEY 15-80 A.

Attribute	Value	Cl.	Sources
Main ampacity	Main lug 125-225 A; mains THQB/THHQB/TEY/SE 100 A, TQD/THQD/SF 225 A	A	S16 p.11-9; oem_spec
Dimensions	Width 8.62 in, depth 5.81 in; lengths 37.5-76.5 in	A	same as above

Key documents: S16 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;
Also fits this family (entry printed elsewhere): TQLFP1, APN48, APN84, TGL20, TGL2, EGS12

5.3 A-SERIES-PWR — A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')

FAM-GEA-002 · panelboard · aka AQP, AEP, ADP, A-Series II Powerpanel, AD/AE/AQ Type P & N Power Panel · markings: GE, GE Industrial Solutions, ABB

Power-panel version of the A-Series: 30 in wide x 8 in deep box, single-piece deadfront (no filler plates needed per catalog), up to 600 A branch device, staggered center-mounted SF/SG breakers. Field breaker kits ASPP6xxxx (DEH40150-DEH40158) are installed into 'Un-Specified Space' on the interior, bolting branch bases/straps to the main bus next to the crossbar and replacing a blank shield insert on the deadfront with a breaker-specific filler plate.

Attribute	Value	Cl.	Sources
Status	current as of BuyLog 07/2014	A	S16 p.11-21; oem_spec
Main ampacity	Mains 125-800 A SG/SK breakers; main lug 600-800 A	A	S16 p.11-22; oem_spec
Branch breakers accepted	AQP: QB 15-100 A, double branch TQD/SE, center-mounted SF/SG. AEP: TEY/TEYF, double branch TED/SE, center SF/SG. ADP: FB, THED, double branch TED/SE, center SF/SG	A	same as above
Dimensions	Width 30 in, depth 8 in; lengths 25.5-88.5 in	A	same as above

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, THQB / THHQB / TXQB, TQD / THQD
Key documents: S16 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S18 DEH40150 Rev.No.03 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Break; S19 DEH40151 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Break; S20 DEH40152 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Brea; S21 DEH40153 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit B; S22 DEH40154 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker K; S23 DEH40155 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Brea; S24 DEH40156 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Break; S25 DEH40157 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Brea; S26 DEH40158 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker K

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00009	**ASPP6EY12D**	A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole	TEY frame per kit title A	unknown
EDH-GEA-00008	**ASPP6EY6D**	A-Series II power panel TEY three-phase circuit breaker kit, six-pole	TEY frame per kit title A	unknown
EDH-GEA-00005	**ASPP6FB6D**	A-Series II power panel FB three-phase circuit breaker kit, six-pole	FB frame per kit title A	unknown
EDH-GEA-00007	**ASPP6QB12D**	A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole	QB frame per kit title A	unknown
EDH-GEA-00006	**ASPP6QB6D**	A-Series II power panel THQB three-phase circuit breaker kit, six-pole	QB frame per kit title A	unknown
EDH-GEA-00001	**ASPP6QD6D**	A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD)	TQD frame per kit title A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00002	**ASPP6SE6D**	A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole	SE frame per kit title **A**	unknown
EDH-GEA-00003	**ASPP6SF3S**	A-Series II power panel SF three-phase circuit breaker kit, three-pole single	SF frame per kit title **A**	unknown
EDH-GEA-00004	**ASPP6SG3S**	A-Series II power panel SG three-phase circuit breaker kit, three-pole	SG frame per kit title **A**	unknown

EDH-GEA-00009 **ASPP6EY12D** GE branch-connector-kit **STATUS UNKNOWN**

A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole

OEM part number	ASPP6EY12D	**A**	S23 p.1; oem_spec
Description	TEY three-phase circuit breaker kit, twelve-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	**A**	same as above
Application	branch	**A**	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	**A**	S23 steps 4-13; oem_spec
Breaker compatibility	TEY frame per kit title	**A**	S23 p.1, title; oem_spec
Kit contents	(4) A & C phase 200A strap 315A7049P10; (2) center strap 315A7048P20; (2) 3X branch base 911E347P3; (6) thread rolling screw & washer 315A7034P6; (1) filler plate TEY 139C5503P129; (4) N722P16006B6	**A**	S23 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	**A**	S23 steps 4-11; oem_spec
OEM instruction document	DEH40155 Rev.No.02	**A**	S23 header; oem_spec
Identification features	Requires minimum 'X2, 12 inches' of unspecified space. Text step 9 also says 'ASPP6TEY12D' (typo in OEM doc).	**A**	S23 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5503P129 (EDH-GEA-00034)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00008 **ASPP6EY6D** GE branch-connector-kit **STATUS UNKNOWN**

A-Series II power panel TEY three-phase circuit breaker kit, six-pole

OEM part number	ASPP6EY6D	**A**	S25 p.1; oem_spec
Description	TEY three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	**A**	same as above
Application	branch	**A**	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	**A**	S25 steps 4-13; oem_spec
Breaker compatibility	TEY frame per kit title	**A**	S25 p.1, title; oem_spec
Kit contents	(2) A & C phase 200A strap 315A7049P10; (1) center strap 315A7048P20; (1) 3X branch base 911E347P3; (3) thread rolling screw & washer 315A7034P6; (1) filler plate TEY 139C5503P129; (4) N722P16006B6	**A**	S25 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	**A**	S25 steps 4-11; oem_spec
OEM instruction document	DEH40157 Rev.No.01	**A**	S25 header; oem_spec
Identification features	Crossbar gap 0.06 in	**A**	S25 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5503P129 (EDH-GEA-00034)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00005	ASPP6FB6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel FB three-phase circuit breaker kit, six-pole

OEM part number	ASPP6FB6D	A	S24 p.1; oem_spec
Description	FB three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S24 steps 4-13; oem_spec
Breaker compatibility	FB frame per kit title	A	S24 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSEG1 (same as SE kit); (6) spool 10093207P2; (6) spool screw 10093208P2; (6) washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5700P86; (8) screw N667P16008B6; (4) screw N80P15046B6; (1) filler plate SE/TED/FB 139C5503P77; (4) N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S24 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max; bracket 27-36 in-lb; spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler & deadfront 27-36 in-lb	A	S24 steps 4-11; oem_spec
OEM instruction document	DEH40156 Rev.No.01	A	S24 header; oem_spec
Identification features	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, SE/TED/TQD 0 in	A	S24 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Requires	139C5702ASEG1 (EDH-GEA-00011), 139C5702BSEG1 (EDH-GEA-00014), 139C5702CSEG1 (EDH-GEA-00017), 139C5700P86 (EDH-GEA-00026), 139C5503P77 (EDH-GEA-00031)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00007	ASPP6QB12D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole

OEM part number	ASPP6QB12D	A	S22 p.1; oem_spec
Description	THQB three-phase circuit breaker kit, twelve-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S22 steps 4-13; oem_spec
Breaker compatibility	QB frame per kit title	A	S22 p.1, title; oem_spec
Kit contents	(4) A & C phase 200A strap 315A7049P10; (2) center strap 315A7048P20; (2) 3X branch base 911E347P3; (6) thread rolling screw & washer 315A7034P6; (1) filler plate QB 139C5362P2; (4) N722P16006B6	A	S22 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	A	S22 steps 4-11; oem_spec
OEM instruction document	DEH40154 Rev.No.02	A	S22 header; oem_spec
Identification features	Requires minimum 'X2, 12 inches' of unspecified space. Crossbar gap 0.06 in.	A	S22 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5362P2 (EDH-GEA-00035)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00006	ASPP6QB6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel THQB three-phase circuit breaker kit, six-pole

OEM part number	ASPP6QB6D	A	S26 p.1; oem_spec
Description	THQB three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S26 steps 4-13; oem_spec
Breaker compatibility	QB frame per kit title	A	S26 p.1, title; oem_spec
Kit contents	(2) A & C phase 200A strap 315A7049P10; (1) center strap 315A7048P20; (1) 3X branch base 911E347P3; (3) thread rolling screw & washer 315A7034P6; (1) filler plate QB 139C5362P2; (4) N722P16006B6	A	S26 p.1 Table 1; oem_spec
Torque values	Straps to main bus 60 in-lb max; breaker terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	A	S26 steps 4-11; oem_spec
OEM instruction document	DEH40158 Rev.No.01	A	S26 header; oem_spec
Identification features	Crossbar gap 0.06 in; after SG 0.582, SF/TFJ, SE/TED(6P), FB/TQD(6P) 1.875 in	A	S26 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5362P2 (EDH-GEA-00035)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00001	ASPP6QD6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD)

OEM part number	ASPP6QD6D	A	S20 p.1; oem_spec
Description	TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD); for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S20 steps 4-13; oem_spec
Breaker compatibility	TQD frame per kit title	A	S20 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CQDG1; (6) spool 315A7036P19; (6) spool screw 315A7037P4; (6) spool washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5500P81; (8) bracket-to-rail screw N667P16008B6; (4) C/B-to-bracket screw N80P150046B6; (1) filler plate TQD 139C5503P64; (4) #10-32x3/8 screw N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S20 p.1 Table 1; oem_spec
Torque values	Branch bases to main bus 60 in-lb max; bracket to rail 27-36 in-lb; 1/4-28 x 1-3/8 spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler plate & deadfront 27-36 in-lb	A	S20 steps 4-11; oem_spec
OEM instruction document	DEH40152 Rev.No.02	A	S20 header; oem_spec
Identification features	Crossbar gap 0.0525 in; after SG 0.582 in, after SF/TFJ 1.875 in	A	S20 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Requires	139C5702AQDG1 (EDH-GEA-00010), 139C5702BQDG1 (EDH-GEA-00013), 139C5702CQDG1 (EDH-GEA-00016), 139C5500P81 (EDH-GEA-00022), 139C5503P64 (EDH-GEA-00030)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00002	ASPP6SE6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole

OEM part number	ASPP6SE6D	A	S21 p.1; oem_spec
Description	SE/TED three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S21 steps 4-13; oem_spec
Breaker compatibility	SE frame per kit title	A	S21 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSEG1; (6) spool 315A7036P18; (6) spool screw 315A7037P3; (6) washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5500P82; (8) screw N667P16008B6; (4) screw N80P150046B6; (1) filler plate SE/TED/FB 139C5503P77; (4) N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S21 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max; bracket 27-36 in-lb; spool screws 50-70 in-lb; breaker to bracket 18-22 in-lb; filler/deadfront 27-36 in-lb	A	S21 steps 4-11; oem_spec
OEM instruction document	DEH40153 Rev.No.02	A	S21 header; oem_spec
Identification features	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, TQD 0 in	A	S21 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	139C5702ASEG1 (EDH-GEA-00011), 139C5702BSEG1 (EDH-GEA-00014), 139C5702CSEG1 (EDH-GEA-00017), 139C5500P82 (EDH-GEA-00023), 139C5503P77 (EDH-GEA-00031)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00003	ASPP6SF3S	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SF three-phase circuit breaker kit, three-pole single

OEM part number	ASPP6SF3S	A	S19 p.1; oem_spec
Description	SF three-phase circuit breaker kit, three-pole single; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S19 steps 4-13; oem_spec
Breaker compatibility	SF frame per kit title	A	S19 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSFG1; (3) spool 315A7036P20; (3) spool screw 315A7037P1; (3) washer 75A105503P111; (3) bus screw 315A7034P6; (1) 3P bracket 139C5500P84; (2) screw N37P16060B6; (2) cup washer N405P40B6; (1) filler plate SF/TFJ 139C5503P90; (4) N722P16006B6	A	S19 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max (left) / 50-70 in-lb (right side text); bracket 27-36 in-lb; spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler 27-36 in-lb	A	S19 steps 4-11; oem_spec
OEM instruction document	DEH40151 Rev.No.02	A	S19 header; oem_spec
Identification features	Crossbar gap 0.061 in; after SG 0.582 in. Filler plate is flipped for right-side mounting.	A	S19 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	139C5702ASFG1 (EDH-GEA-00012), 139C5702BSFG1 (EDH-GEA-00015), 139C5702CSFG1 (EDH-GEA-00018), 139C5500P84 (EDH-GEA-00025), 139C5503P90 (EDH-GEA-00032)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00004	ASPP6SG3S	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SG three-phase circuit breaker kit, three-pole

OEM part number	ASPP6SG3S	A	S18 p.1; oem_spec
Description	SG three-phase circuit breaker kit, three-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S18 steps 4-13; oem_spec
Breaker compatibility	SG frame per kit title	A	S18 p.1, title; oem_spec
Kit contents	(3) straps A/B/C 315A7046P7/P8/P9; (3) spool 315A7036P22; (3) spool screw 315A7037P5; (3) washer 75A105503P111; (3) bus screw 315A7034P7; (1) 3P bracket 139C5500P83; (2) screw N667P16008B6; (3) xmas tree 315A7077P1; (1) filler plate SG/TFG 139C5503P103; (4) N722P16006B6; (1) bracket insulation 10086929P11; insulators B/A/C 10086929P5/P7/P6; (2) breaker mounting screws N37P16060B6; (2) spring lock washer #12 N405P40B6	A	S18 p.1 Table 1; oem_spec
Torque values	Straps to main bus 60 in-lb max; bracket 27-36 in-lb; spool screws 50-70 lb-in; breaker to bracket 18-22 lb-in; filler/deadfront 27-36 lb-in	A	S18 steps 4-11; oem_spec
OEM instruction document	DEH40150 Rev.No.03	A	S18 header; oem_spec
Identification features	Crossbar gap 0.002 in	A	S18 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	315A7046P7 (EDH-GEA-00019), 315A7046P8 (EDH-GEA-00020), 315A7046P9 (EDH-GEA-00021), 139C5500P83 (EDH-GEA-00024), 139C5503P103 (EDH-GEA-00033)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00010	**139C5702AQDG1**	Branch base, A phase, TQD (A-Series II)	—	unknown
EDH-GEA-00011	**139C5702ASEG1**	Branch base, A phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00012	**139C5702ASFG1**	Branch base, A phase, SF (A-Series II)	—	unknown
EDH-GEA-00013	**139C5702BQDG1**	Branch base, B phase, TQD (A-Series II)	—	unknown
EDH-GEA-00014	**139C5702BSEG1**	Branch base, B phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00015	**139C5702BSFG1**	Branch base, B phase, SF (A-Series II)	—	unknown
EDH-GEA-00016	**139C5702CQDG1**	Branch base, C phase, TQD (A-Series II)	—	unknown
EDH-GEA-00017	**139C5702CSEG1**	Branch base, C phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00018	**139C5702CSFG1**	Branch base, C phase, SF (A-Series II)	—	unknown
EDH-GEA-00019	**315A7046P7**	SG breaker strap, A phase (A-Series II)	—	unknown
EDH-GEA-00020	**315A7046P8**	SG breaker strap, B phase (A-Series II)	—	unknown
EDH-GEA-00021	**315A7046P9**	SG breaker strap, C phase (A-Series II)	—	unknown
EDH-GEA-00028	**315A7048P20**	Center (B phase) strap (THQB/TEY, A-Series II)	—	unknown
EDH-GEA-00027	**315A7049P10**	A & C phase 200A strap (THQB/TEY, A-Series II)	—	unknown

EDH-GEA-00010	139C5702AQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, TQD (A-Series II)

OEM part number	139C5702AQDG1	A	S20 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S20 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S20 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00011	139C5702ASEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, SE/TED/FB (A-Series II)

OEM part number	139C5702ASEG1	A	S21, S24 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar, 60 in-lb max	A	S21, S24 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S21, S24 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00012	139C5702ASFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, SF (A-Series II)

OEM part number	139C5702ASFG1	A	S19 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar with bus screw 315A7034P6	A	S19 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S19 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00013	139C5702BQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, TQD (A-Series II)

OEM part number	139C5702BQDG1	A	S20 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S20 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S20 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00014	139C5702BSEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, SE/TED/FB (A-Series II)

OEM part number	139C5702BSEG1	A	S21, S24 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar, 60 in-lb max	A	S21, S24 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S21, S24 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00015	139C5702BSFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, SF (A-Series II)

OEM part number	139C5702BSFG1	A	S19 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar with bus screw 315A7034P6	A	S19 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S19 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00016	139C5702CQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, TQD (A-Series II)

OEM part number	139C5702CQDG1	A	S20 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S20 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S20 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00017	139C5702CSEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, SE/TED/FB (A-Series II)

OEM part number	139C5702CSEG1	A	S21, S24 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar, 60 in-lb max	A	S21, S24 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S21, S24 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00018	139C5702CSFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, SF (A-Series II)

OEM part number	139C5702CSFG1	A	S19 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar with bus screw 315A7034P6	A	S19 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S19 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00019	315A7046P7	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, A phase (A-Series II)

OEM part number	315A7046P7	A	S18 Table 1; oem_spec
Description	STRAP FOR A PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S18 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S18 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00020	315A7046P8	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, B phase (A-Series II)

OEM part number	315A7046P8	A	S18 Table 1; oem_spec
Description	STRAP FOR B PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S18 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S18 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00021	315A7046P9	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, C phase (A-Series II)

OEM part number	315A7046P9	A	S18 Table 1; oem_spec
Description	STRAP FOR C PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S18 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S18 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00028	315A7048P20	GE	connector-strap	STATUS UNKNOWN

Center (B phase) strap (THQB/TEY, A-Series II)

OEM part number	315A7048P20	A	S22, S23, S25, S26 Table 1; oem_spec
Description	STRAP, CENTER	A	same as above
Application	branch	A	same as above
Installation location	B phase main bus; located using 3X branch base placed against crossbar	A	S22, S23, S25, S26 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S22, S23, S25, S26 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00027	315A7049P10	GE	connector-strap	STATUS UNKNOWN

A & C phase 200A strap (THQB/TEY, A-Series II)

OEM part number	315A7049P10	A	S22, S23, S25, S26 Table 1; oem_spec
Description	A & C PHASE 200A STRAP	A	same as above
Application	branch	A	same as above
Installation location	Screwed to main bus with thread rolling screw & washer 315A7034P6, 60 in-lb max	A	S22, S23, S25, S26 installation steps; oem_spec
Current rating	200 A (per description)	A	S22 Table 1; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S22, S23, S25, S26 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00022	**139C5500P81**	3P breaker support bracket (ASPP6QD6D)	—	unknown
EDH-GEA-00023	**139C5500P82**	3P breaker support bracket (ASPP6SE6D)	—	unknown
EDH-GEA-00024	**139C5500P83**	3P breaker support bracket (ASPP6SG3S)	—	unknown
EDH-GEA-00025	**139C5500P84**	3P breaker support bracket (ASPP6SF3S)	—	unknown
EDH-GEA-00026	**139C5700P86**	3P breaker support bracket (ASPP6FB6D)	—	unknown

EDH-GEA-00022	139C5500P81	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6QD6D)

OEM part number	139C5500P81	A	S20 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S20 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S20 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00023	139C5500P82	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SE6D)

OEM part number	139C5500P82	A	S21 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S21 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D	A	S21 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00024	139C5500P83	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SG3S)

OEM part number	139C5500P83	A	S18 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S18 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S18 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00025	139C5500P84	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SF3S)

OEM part number	139C5500P84	A	S19 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S19 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S19 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00026	139C5700P86	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6FB6D)

OEM part number	139C5700P86	A	S24 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S24 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6FB6D	A	S24 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00029	**911E347P3**	3X branch base (THQB/TEY, A-Series II)	—	unknown

EDH-GEA-00029 **911E347P3** GE insulator **STATUS UNKNOWN**

3X branch base (THQB/TEY, A-Series II)

OEM part number	911E347P3	A	S22, S23, S25, S26 Table 1; oem_spec
Description	3X BRANCH BASE; load end of breaker snaps into base lancing slot	A	same as above
Application	branch	A	same as above
Installation location	Interior, adjacent to crossbar; supports load end of THQB/TEY	A	S22, S23, S25, S26 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S22, S23, S25, S26 Table 1; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in per GE convention)	B	S22, S16 Table 1; BuyLog p.11-40; inference
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00035	**139C5362P2**	Deadfront filler plate (shield insert) - QB (A-Series II power panel)	—	unknown
EDH-GEA-00033	**139C5503P103**	Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)	—	unknown
EDH-GEA-00034	**139C5503P129**	Deadfront filler plate (shield insert) - TEY (A-Series II power panel)	—	unknown
EDH-GEA-00030	**139C5503P64**	Deadfront filler plate (shield insert) - TQD (A-Series II power panel)	—	unknown
EDH-GEA-00031	**139C5503P77**	Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)	—	unknown
EDH-GEA-00032	**139C5503P90**	Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)	—	unknown

EDH-GEA-00035 **139C5362P2** GE filler-plate **STATUS UNKNOWN**

Deadfront filler plate (shield insert) - QB (A-Series II power panel)

OEM part number	139C5362P2	A	S22, S26 Table 1; oem_spec
Description	FILLER PLATE, QB	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S22, S26 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D	A	S22, S26 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S22 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00033	139C5503P103	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)

OEM part number	139C5503P103	A	S18 Table 1; oem_spec
Description	FILLER PLATE, SG/TFG	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S18 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S18 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00034	139C5503P129	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - TEY (A-Series II power panel)

OEM part number	139C5503P129	A	S23, S25 Table 1; oem_spec
Description	FILLER PLATE, TEY	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S23, S25 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6EY6D, ASPP6EY12D	A	S23, S25 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S23 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00030	139C5503P64	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - TQD (A-Series II power panel)

OEM part number	139C5503P64	A	S20 Table 1; oem_spec
Description	FILLER PLATE, TQD	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S20 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S20 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00031	139C5503P77	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)

OEM part number	139C5503P77	A	S21, S24 Table 1; oem_spec
Description	FILLER PLATE, SE/TED/FB	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S21, S24 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S21, S24 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S21 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00032	139C5503P90	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)

OEM part number	139C5503P90	A	S19 Table 1; oem_spec
Description	FILLER PLATE, SF/TFJ	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S19 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S19 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

5.4 CCB-QMR — Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)

FAM-GEA-006 · panelboard · aka CCB, QMR, CDP? · markings: GE, General Electric

Older GE power panelboards. Breakers mount with copper strap kits suffixed DPK (dual/twin mount) or SPK (single mount) usable on Cu or Al main bus; device product number + suffix ordered as a unit. Replacement CCB fronts CBAxxxxS/F and boxes DASW/DACB; filler plates CCBFPx/QMRFPx. QMR used THFP fusible switches. CDP is named in the batch scope but no CDP-specific data was found.

Attribute	Value	Cl.	Sources
Status	Renewal parts still listed 2014; QMR fusible switches 'Limited availability. Obsolete when inventory depleted.'	A	S16 p.11-49 to 11-51; oem_spec

Breaker families associated: Spectra SF (SFHA/SFLA/SFPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TFJ / TFK / THFK / TFL, TJD / TJJ / TJK / THJK, TKM / THKM, TQD / THQD

Key documents: S16 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00262	**SF2DPK**	CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)	SFH/SFL A	unknown
EDH-GEA-00266	**SK12SPK**	CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)	SKH12 A	unknown
EDH-GEA-00265	**SK8SPK**	CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)	SKH8 A	unknown
EDH-GEA-00256	**TED1DPK**	CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)	TEB/TED A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00261	**TEL1DPK**	CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)	TEL **A**	unknown
EDH-GEA-00257	**TF2DPK**	CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)	TFJ/TFK/TFL **A**	unknown
EDH-GEA-00259	**TJ4DPK**	CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)	TJD/TJJ/TJK **A**	unknown
EDH-GEA-00260	**TJ6DPK**	CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)	TJK **A**	unknown
EDH-GEA-00264	**TK12SPK**	CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)	TKM12/THKM12 **A**	unknown
EDH-GEA-00263	**TK8SPK**	CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)	TKM8/THKM8 **A**	unknown
EDH-GEA-00258	**TQ2DPK**	CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)	TQD **A**	unknown

EDH-GEA-00262 SF2DPK — GE — branch-connector-kit — STATUS UNKNOWN

CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)

OEM part number	SF2DPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	**A**	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, SFH/SFL, 225 A kit. Footnotes: if mounting hardware exists must order SFCARE for additional insulators; 225 A max	**A**	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	**A**	same as above
Breaker compatibility	SFH/SFL	**A**	same as above
Current rating	225 A	**A**	same as above
Material	Copper straps	**A**	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00266 SK12SPK — GE — branch-connector-kit — STATUS UNKNOWN

CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)

OEM part number	SK12SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	**A**	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, SKH12, 1200 A kit. Deep mounted interior required	**A**	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	**A**	same as above
Breaker compatibility	SKH12	**A**	same as above
Current rating	1200 A	**A**	same as above
Material	Copper straps	**A**	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00265 SK8SPK — GE — branch-connector-kit — STATUS UNKNOWN

CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)

OEM part number	SK8SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	**A**	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, SKH8, 800 A kit. Deep mounted interior required	**A**	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	**A**	same as above
Breaker compatibility	SKH8	**A**	same as above
Current rating	800 A	**A**	same as above
Material	Copper straps	**A**	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00256	TED1DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)

OEM part number	TED1DPK	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TEB/TED, 150 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TEB/TED	A	same as above
Current rating	150 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00261	TEL1DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)

OEM part number	TEL1DPK	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TEL, 150 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TEL	A	same as above
Current rating	150 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00257	TF2DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)

OEM part number	TF2DPK	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TFJ/TFK/TFL, 225 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TFJ/TFK/TFL	A	same as above
Current rating	225 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00259	TJ4DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)

OEM part number	TJ4DPK	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TJD/TJJ/TJK, 400 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TJD/TJJ/TJK	A	same as above
Current rating	400 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00260	TJ6DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)

OEM part number	TJ6DPK	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TJK, 600 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TJK	A	same as above
Current rating	600 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00264	TK12SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)

OEM part number	TK12SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, TKM12/THKM12, 1200 A kit. Deep mounted interior required; requires 7X at extreme end or 8X if mounted in center of interior	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TKM12/THKM12	A	same as above
Current rating	1200 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TKM / THKM		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00263	TK8SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)

OEM part number	TK8SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, TKM8/THKM8, 800 A kit. Deep mounted interior required	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TKM8/THKM8	A	same as above
Current rating	800 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TKM / THKM		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00258	TQ2DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)

OEM part number	TQ2DPK	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TQD, 225 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TQD	A	same as above
Current rating	225 A	A	same as above
Material	Copper straps	A	same as above
Aftermarket / reproduction	Distributor listings (e.g. Stanion 'tq2dpkge') describe TQ2DPK as 'For Use With: TQD Frame 125 to 225 A Circuit Breaker and Spectra Series CCB, QMR Panelboard' (Stanion page seen only via search summary; returned 404 on fetch)	C	S36 distributor
Cross-links	Families: CCB-QMR · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00275	**75C145005G703**	QMR panelboard filler plate 3X	—	unknown
EDH-GEA-00270	**75C145005G711**	CCB panelboard filler plate 2X	—	unknown
EDH-GEA-00271	**75C145005G715**	CCB panelboard filler plate 6X	—	unknown
EDH-GEA-00267	**CCBFP1**	CCB panelboard filler plate 1X	—	unknown
EDH-GEA-00268	**CCBFP3**	CCB panelboard filler plate 3X	—	unknown
EDH-GEA-00269	**CCBFP5**	CCB panelboard filler plate 5X	—	unknown
EDH-GEA-00272	**QMRFP1**	QMR panelboard filler plate 1X	—	unknown
EDH-GEA-00273	**QMRFP2**	QMR panelboard filler plate 2X	—	unknown
EDH-GEA-00274	**QMRFP5**	QMR panelboard filler plate 5X	—	unknown

EDH-GEA-00275 **75C145005G703** GE filler-plate **STATUS UNKNOWN**

QMR panelboard filler plate 3X

OEM part number	75C145005G703	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 3X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00270 **75C145005G711** GE filler-plate **STATUS UNKNOWN**

CCB panelboard filler plate 2X

OEM part number	75C145005G711	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 2X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00271 **75C145005G715** GE filler-plate **STATUS UNKNOWN**

CCB panelboard filler plate 6X

OEM part number	75C145005G715	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 6X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00267 **CCBFP1** GE filler-plate **STATUS UNKNOWN**

CCB panelboard filler plate 1X

OEM part number	CCBFP1	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 1X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00268 **CCBFP3** GE filler-plate **STATUS UNKNOWN**

CCB panelboard filler plate 3X

OEM part number	CCBFP3	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 3X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00269	CCBFP5	GE	filler-plate	STATUS UNKNOWN

CCB panelboard filler plate 5X

OEM part number	CCBFP5	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 5X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00272	QMRFP1	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 1X

OEM part number	QMRFP1	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 1X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00273	QMRFP2	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 2X

OEM part number	QMRFP2	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 2X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00274	QMRFP5	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 5X

OEM part number	QMRFP5	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 5X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

5.5 NHB — NAB / NHB bolt-on panelboards (legacy)

FAM-GEA-007 · panelboard · aka NAB, NHB, NLAB? · markings: General Electric

Legacy GE bolt-on panelboard line. Only distributor evidence found (NHB150PK twin-mount hardware). No OEM document for NHB or NLAB located in this batch.

Attribute	Value	Cl.	Sources
Status	discontinued (legacy); hardware sold as new-surplus	**C**	S32 surplus_listing
Branch breakers accepted	E-frame bolt-on TEB/TED/TEC/THED and SEDA (per distributor)	**C**	same as above

Breaker families associated: TEB / TED / THED / TED4 / TED6

Key documents: S32 NHB150PK General Electric / GE Mounting Hardware (product page); S33 General Electric NHB150PK Twin Mount Mounting Hardware (product page)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00280	**NHB150PK**	NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole	TEB, TED, TEC, THED, SEDA (description); spec list adds SEHA, SELA, SE **C**	discontinued; new-surplus stock

EDH-GEA-00280	NHB150PK	GE	branch-connector-kit	DISCONTINUED; NEW-SURP

NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole

OEM part number	NHB150PK	B	S32, S33 distributor
Description	Direct replacement mounting hardware for GE NHB bolt-on style panelboards; dual/twin branch mounting; copper; 150 A, 600 V max	C	S32 surplus_listing
Breaker compatibility	TEB, TED, TEC, THED, SEDA (description); spec list adds SEHA, SELA, SEPA (Distributor lists disagree)	C	same as above
Kit contents	Screws, a panel cover and brackets (SuperBreakers)	C	S33 distributor
Material	Copper	C	S32 surplus_listing
Status	discontinued; new-surplus stock	C	same as above
Cross-links	Families: NHB · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM confirmation, Dimensions, OEM instruction document		
Open question	*Does NHB150PK also fit NLAB panels? No evidence found.*		

5.6 RG-NEXT — ReliaGear neXT Power Panelboards

FAM-GEA-008 · panelboard · aka ReliaGear neXT, ReliaGear OEM neXT · markings: ABB, GE

ABB's post-2018 power panelboard (doc 1SXU900191B0201, 2022). ABB states there is a single catalog number for all circuit breaker installation kits; that number was not found in accessible sources.

Attribute	Value	Cl.	Sources
Voltage rating	up to 600 Vac 3ph3w / 600Y/347 V	A	S31 oem_spec
Main ampacity	Bus 250-1200 A Cu or Al; MLO, MCB (vertical or horizontal) or feed-through lug pads	A	same as above
Branch breakers accepted	Tmax XT1/XT4/XT5/XT6/XT7, Record Plus FB (FBV/FBN/FBH/FBL), TEY (TEYD/TEYH/TEYL); 15-1200 A	A	same as above

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), TEY / TEYF / TEYD / TEYH / TEYL
Key documents: S31 1SXU900191B0201 ReliaGear neXT Power Panelboards (brochure); S34 BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (o

5.7 SCP-PLUS — Spectra Series Type SCP Plus panelboards

FAM-GEA-005 · panelboard · aka SCP+, SCP · markings: GE

Spectra-family power panel variant with its own ACB boxes (31 and 40 in wide x 11.5 in deep), ACF fronts, ACTMK/ACSMK mounting hardware kits (hardware + straps), ACTFPK/ACSFPK filler kits and ACTHK/ACSHK single-breaker hardware. Filler plates for SCP+ are to be ordered from the Houston equipment plant.

Attribute	Value	Cl.	Sources
box	ACB31xxxx 31 in W x 11.5 in D; ACB40xxxx 40 in W x 11.5 in D; X heights 15-42	A	S16 p.11-48; oem_spec

Breaker families associated: Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TJD / TJJ / TJK / THJK
Key documents: S16 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00254	**ACSMKSG**	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, single)	SGD, SGH, SGL, SGP A	unknown
EDH-GEA-00255	**ACSMKSK**	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	SKH, SKL A	unknown
EDH-GEA-00246	**ACTMKEB1P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dual)	TEB, TED, THED A	unknown
EDH-GEA-00247	**ACTMKEB2P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dual)	TEB, TED, THED A	unknown
EDH-GEA-00248	**ACTMKEB3P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dual)	TEB, TED, THED A	unknown
EDH-GEA-00252	**ACTMKJD**	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	TJD, TJJ, TJK A	unknown
EDH-GEA-00250	**ACTMKQD2P**	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	TQD, THQD A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00251	**ACTMKQD3P**	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00245	**ACTMKSE**	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED, SEP, dual)	SHE (SEH), SEL, SED, SEP **A**	unknown
EDH-GEA-00249	**ACTMKSF**	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, dual)	TFK, SFH, SFL, SFP **A**	unknown
EDH-GEA-00253	**ACTMKSG**	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, dual)	SGD, SGH, SGL, SGP **A**	unknown

EDH-GEA-00254 ACSMKSG — GE — branch-connector-kit — STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, single)

OEM part number	ACSMKSG	**A**	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACSFPKSG [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACSHKSG [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, single mounted, SGD, SGH, SGL, SGP, 400/800 A	**A**	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	**A**	same as above
Current rating	400/800 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACSFPKSG listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00255 ACSMKSK — GE — branch-connector-kit — STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)

OEM part number	ACSMKSK	**A**	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACSFPKSK [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACSHKSK [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, single mounted, SKH, SKL, 800/1200 A	**A**	same as above
Breaker compatibility	SKH, SKL	**A**	same as above
Current rating	800/1200 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACSFPKSK listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00246 ACTMKEB1P — GE — branch-connector-kit — STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dual)

OEM part number	ACTMKEB1P	**A**	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB1P [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKEB1P [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 1-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB1P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00247	ACTMKEB2P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dual)

OEM part number	ACTMKEB2P	**A**	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB2P [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKEB2P [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 2-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB2P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00248	ACTMKEB3P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dual)

OEM part number	ACTMKEB3P	**A**	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB3P [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKEB3P [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 3-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB3P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00252	ACTMKJD	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)

OEM part number	ACTMKJD	**A**	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKJD [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKJD [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TJD, TJJ, TJK, 400 A	**A**	same as above
Breaker compatibility	TJD, TJJ, TJK	**A**	same as above
Current rating	400 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKJD listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00250	ACTMKQD2P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)

OEM part number	ACTMKQD2P	A	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKQD2P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKQD2P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TQD, THQD, 225 A, 2-pole	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Current rating	225 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKQD2P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00251	ACTMKQD3P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)

OEM part number	ACTMKQD3P	A	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKQD3P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKQD3P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TQD, THQD, 225 A, 3-pole	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Current rating	225 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKQD3P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00245	ACTMKSE	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED, SEP, dual)

OEM part number	ACTMKSE	A	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSE [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSE [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, SHE (SEH), SEL, SED, SEP, 150 A	A	same as above
Breaker compatibility	SHE (SEH), SEL, SED, SEP	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSE listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00249	ACTMKSF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, dual)

OEM part number	ACTMKSF	A	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSF [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSF [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TFK, SFH, SFL, SFP, 250 A	A	same as above
Breaker compatibility	TFK, SFH, SFL, SFP	A	same as above
Current rating	250 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSF listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00253	ACTMKSG	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, dual)

OEM part number	ACTMKSG	A	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSG [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSG [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, SGD, SGH, SGL, SGP, 400/600 A	A	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	A	same as above
Current rating	400/600 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSG listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00276	**SCPFP1**	SCP+ panelboard filler plate 1X	—	unknown
EDH-GEA-00277	**SCPFP2**	SCP+ panelboard filler plate 2X	—	unknown
EDH-GEA-00278	**SCPFP3**	SCP+ panelboard filler plate 3X	—	unknown
EDH-GEA-00279	**SCPFP5**	SCP+ panelboard filler plate 5X	—	unknown

EDH-GEA-00276	SCPFP1	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 1X

OEM part number	SCPFP1	A	S16 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 1X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00277	SCPFP2	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 2X

OEM part number	SCPFP2	A	S16 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 2X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00278	SCPFP3	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 3X

OEM part number	SCPFP3	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 3X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00279	SCPFP5	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 5X

OEM part number	SCPFP5	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 5X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

5.8 SPECTRA-PP — Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)

FAM-GEA-004 · panelboard · aka Spectra, Spectra Series, SpectraRMS, APN, APNB, Spectra Bolt-On (SBO), Spectra Plug-In · markings: GE, General Electric, GE Industrial Solutions, ABB

GE's power distribution panelboard. Two interior styles: APN plug-in (breakers bolt to AMC circuit breaker mounting modules that latch onto the interior rail and clip onto the bus; ADS fusible switch modules) and APNB bolt-on (breakers bolt to copper straps AMCB kits fastened with carriage bolts/antiturn clips to the vertical bus). Vertical space measured in X units (1X = 1-3/8 in). Box widths 27/31/36/40/44 in, APB boxes and APF fronts, AML main-lug modules, ANK/ANKN neutral kits, AEG ground kits. NOTE on 'APN': in GE nomenclature APN is the Spectra plug-in interior type code (APNB = bolt-on), while APN48/APN84/APN126 (A-Series) and APN49/APN99 (Spectra) are permanent circuit-number tab kits; no 'A-Series power panel' code APN was found.

Attribute	Value	Cl.	Sources
Status	Listed as current in 2014 BuyLog; a 2021/2022 ABB BuyLog TOC reportedly labels Spectra bolt-on mounting hardware 'obsoleted' (Obsolescence wording seen only in a search-engine summary of the blocked ABB BuyLog.)	**C**	S16, S34 inference
Successor	ReliaGear neXT power panelboards (ABB) - inferred from ABB BuyLog placing 'Retrofit kit for Spectra panelboards' alongside ReliaGear neXT	**D**	S34, S31 inference
Voltage rating	600 Vac / 250 Vdc max	**A**	S16 p.11-24; oem_spec
Main ampacity	Main bus 250-1200 A Cu or Al; mains up to 1200 A lugs, breaker (SF/SG/SK/FG) or fusible switch	**A**	same as above
Branch breakers accepted	Double-branch SE, SF, SG, FG, FB, TEY, TEB, TQD (and THQB); center-mounted SK; plug-in version also ADS fusible switches 30-1200 A	**A**	same as above
x_unit	1X = 1 3/8 in vertical panel space	**A**	S16 p.11-40 note; oem_spec
box_widths	27, 31, 36, 40, 44 in	**A**	S16 p.11-34, 11-35; oem_spec
apn_meaning	APN = Panelboard Interior Type (plug-in); APNB = Panelboard Interior Type bolt-on; structure APN<X-height><amps>U[B4]	**A**	S16 p.11-37; oem_spec
plug_in_vs_bolt_on	Main lug kits bolt directly to interior bus bars (either APN Plug-In Style or APNB Bolt-On Style)	**A**	S16 p.11-28; oem_spec

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Record Plus FC (FCS/FCV/FCN/FCH/FCL), Record Plus FG (FGV/FGN/FGH/FGL/FGP), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, TFJ / TFK / THFK / TFL, THQB / THHQB / TXQB, TJD / TJJ / TJK / THJK, TKM / THKM, TQD / THQD

Key documents: S16 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S27 DEH065 R02 Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD); S28 GEH5674 R03 Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM); S29 DEH40392 R01 Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL; S30 DEH212 R02 Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S; S31 1SXU900191B0201 ReliaGear neXT Power Panelboards (brochure); S34 BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (o

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00231	**AML3120CFP**	Spectra main lug module AML3120CFP (1200 A compression)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00226	**AML3120FP**	Spectra main lug module AML3120FP (1200 A mechanical)	—	unknown
EDH-GEA-00227	**AML3250CFP**	Spectra main lug module AML3250CFP (250 A compression)	—	unknown
EDH-GEA-00220	**AML3250FP**	Spectra main lug module AML3250FP (250 A mechanical)	—	unknown
EDH-GEA-00219	**AML3250SFP**	Spectra main lug module AML3250SFP (250 A mechanical)	—	unknown
EDH-GEA-00228	**AML3400CFP**	Spectra main lug module AML3400CFP (400 A compression)	—	unknown
EDH-GEA-00222	**AML3400FP**	Spectra main lug module AML3400FP (400 A mechanical)	—	unknown
EDH-GEA-00221	**AML3400SFP**	Spectra main lug module AML3400SFP (400 A mechanical)	—	unknown
EDH-GEA-00229	**AML3600CFP**	Spectra main lug module AML3600CFP (600 A compression)	—	unknown
EDH-GEA-00224	**AML3600FP**	Spectra main lug module AML3600FP (600 A mechanical)	—	unknown
EDH-GEA-00223	**AML3600SFP**	Spectra main lug module AML3600SFP (600 A mechanical)	—	unknown
EDH-GEA-00230	**AML3800CFP**	Spectra main lug module AML3800CFP (800 A compression)	—	unknown
EDH-GEA-00225	**AML3800FP**	Spectra main lug module AML3800FP (800 A mechanical)	—	unknown

EDH-GEA-00231 **AML3120CFP** GE main-lug-kit **STATUS UNKNOWN**

Spectra main lug module AML3120CFP (1200 A compression)

OEM part number	AML3120CFP	**A**	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 1200 A, Compression lugs, 4 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6XW	**A**	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	same as above
Current rating	1200 A	**A**	same as above
Dimensions	6X module height; box width 36, 44 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00226 **AML3120FP** GE main-lug-kit **STATUS UNKNOWN**

Spectra main lug module AML3120FP (1200 A mechanical)

OEM part number	AML3120FP	**A**	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 1200 A, Mechanical lugs, 2 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6XW	**A**	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	same as above
Current rating	1200 A	**A**	same as above
Dimensions	6X module height; box width 36, 44 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00227	AML3250CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250CFP (250 A compression)

OEM part number	AML3250CFP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 350kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	250 A	A	same as above
Dimensions	6X module height; box width 36 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00220	AML3250FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250FP (250 A mechanical)

OEM part number	AML3250FP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Mechanical lugs, 1 lug(s) per phase, 1 wire(s) per lug, #6-350kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	250 A	A	same as above
Dimensions	6X module height; box width 36 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00219	AML3250SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250SFP (250 A mechanical)

OEM part number	AML3250SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Mechanical lugs, 1 lug(s) per phase, 1 wire(s) per lug, #6-350kcmil, includes cover plate AFPML4X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	250 A	A	same as above
Dimensions	4X module height; box width 27, 36 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00228	AML3400CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400CFP (400 A compression)

OEM part number	AML3400CFP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	400 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00222	AML3400FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400FP (400 A mechanical)

OEM part number	AML3400FP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	400 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00221	AML3400SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400SFP (400 A mechanical)

OEM part number	AML3400SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML4X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	400 A	A	same as above
Dimensions	4X module height; box width 27, 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00229	AML3600CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600CFP (600 A compression)

OEM part number	AML3600CFP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	600 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00224	AML3600FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600FP (600 A mechanical)

OEM part number	AML3600FP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	600 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00223	AML3600SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600SFP (600 A mechanical)

OEM part number	AML3600SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML4X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	600 A	A	same as above
Dimensions	4X module height; box width 27, 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00230	AML3800CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3800CFP (800 A compression)

OEM part number	AML3800CFP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 800 A, Compression lugs, 4 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	800 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00225	AML3800FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3800FP (800 A mechanical)

OEM part number	AML3800FP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 800 A, Mechanical lugs, 2 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	800 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

Through Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00243	**AFL120**	Spectra feed-thru lug cover plate kit AFL120	—	unknown
EDH-GEA-00242	**AFL600**	Spectra feed-thru lug cover plate kit AFL600	—	unknown

EDH-GEA-00243	AFL120	GE	through-feed-lug-kit	STATUS UNKNOWN

Spectra feed-thru lug cover plate kit AFL120

OEM part number	AFL120	A	S16 p.11-46; oem_spec
Description	Feed thru lug cover plate kit: converts AML main lug module to feed-thru lug module; includes barrier and oversized cover plates (discard original cover plates)	A	same as above
Current rating	800/1200 A	A	same as above
Dimensions	12X; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5630 (Type AML Feed Thru Main Lug Kits)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material, Status		

EDH-GEA-00242	AFL600	GE	through-feed-lug-kit	STATUS UNKNOWN

Spectra feed-thru lug cover plate kit AFL600

OEM part number	AFL600	A	S16 p.11-46; oem_spec
Description	Feed thru lug cover plate kit: converts AML main lug module to feed-thru lug module; includes barrier and oversized cover plates (discard original cover plates)	A	same as above
Current rating	250/400/600 A	A	same as above
Dimensions	9X; box width 27, 36, 44 in	A	same as above
OEM instruction document	GEH-5630 (Type AML Feed Thru Main Lug Kits)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material, Status		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00119	**AMCB2FGMFP**	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P single)	FGV, FGN, FGH, FGP A	unknown
EDH-GEA-00117	**AMCB2FJFP**	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P single)	SFH, SFL, SFP A	unknown
EDH-GEA-00118	**AMCB2FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P single)	TFJ, TFK, THFK A	unknown
EDH-GEA-00120	**AMCB2GMFP**	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P single)	SGH, SGL, SGP A	unknown
EDH-GEA-00126	**AMCB2KMFP**	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THKM, 2P single)	SKH, SKL, SKP, TKM, THKM A	unknown
EDH-GEA-00123	**AMCB3FGMFP**	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P single)	FGV, FGN, FGH, FGP A	unknown
EDH-GEA-00121	**AMCB3FJFP**	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P single)	SFH, SFL, SFP A	unknown
EDH-GEA-00122	**AMCB3FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P single)	TFJ, TFK, THFK A	unknown
EDH-GEA-00124	**AMCB3GMFP**	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P single)	SGH, SGL, SGP A	unknown
EDH-GEA-00127	**AMCB3KMFP**	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THKM, 3P single)	SKH, SKL, SKP, TKM, THKM A	unknown
EDH-GEA-00125	**AMCB3LBFP**	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	SKP (as printed; LB code = THLC2/THLC4 per nomenclature) A	unknown
EDH-GEA-00098	**AMCB4EBFP**	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	TEB, TED A	unknown
EDH-GEA-00099	**AMCB4EYFP**	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	TEY A	unknown
EDH-GEA-00100	**AMCB4FBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P dual)	FBV, FBN, FBH, FBL A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00101	**AMCB4FDBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FCL, 2P dual)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00113	**AMCB4FGBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00109	**AMCB4FJFP**	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00111	**AMCB4FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00114	**AMCB4GBFP**	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00102	**AMCB4QDFP**	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	TQD, THQD **A**	unknown
EDH-GEA-00103	**AMCB4SEFP**	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SEP, 2P dual)	THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00104	**AMCB6EBFP**	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SEH, SEL, SEP, 3P dual)	TEB, TED, THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00105	**AMCB6EYFP**	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	TEY **A**	unknown
EDH-GEA-00106	**AMCB6FBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00107	**AMCB6FDBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FCL, 3P dual)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00115	**AMCB6FGBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00110	**AMCB6FJFP**	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00112	**AMCB6FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00116	**AMCB6GBFP**	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00108	**AMCB6QDFP**	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	TQD, THQD **A**	unknown

EDH-GEA-00119 — AMCB2FGMFP

GE | branch-connector-kit | **STATUS UNKNOWN**

Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P single)

OEM part number	AMCB2FGMFP	**A**	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FGM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	**B**	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	**A**	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	**A**	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	**A**	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	**A**	S16 p.11-43; oem_spec
Poles	2	**A**	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00117	AMCB2FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P single)

OEM part number	AMCB2FJFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00118	AMCB2FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P single)

OEM part number	AMCB2FJFPTF	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00120	AMCB2GMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P single)

OEM part number	AMCB2GMFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2GM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00126	AMCB2KMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THKM, 2P single)

OEM part number	AMCB2KMFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2KM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in	A	same as above
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00123	AMCB3FGMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P single)

OEM part number	AMCB3FGMFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FGM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00121	AMCB3FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P single)

OEM part number	AMCB3FJFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00122	AMCB3FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P single)

OEM part number	AMCB3FJFPTF	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00124	AMCB3GMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P single)

OEM part number	AMCB3GMFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3GM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00127	AMCB3KMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THKM, 3P single)

OEM part number	AMCB3KMFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3KM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in	A	same as above
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00125	AMCB3LBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)

OEM part number	AMCB3LBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3LB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SKP (as printed; LB code = THLC2/THLC4 per nomenclature)	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		
Open question	*AMCB3LBFP is listed for 'SKP 2-pole' but LB code = THLC2/THLC4 and the 3 = 3 poles: verify against OEM*		

EDH-GEA-00098	AMCB4EBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)

OEM part number	AMCB4EBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4EB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TEB, TED	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00099	AMCB4EYFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)

OEM part number	AMCB4EYFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4EY (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TEY	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-062 (TEY)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00100	AMCB4FBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P dual)

OEM part number	AMCB4FBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00101	AMCB4FDBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FCL, 2P dual)

OEM part number	AMCB4FDBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FDB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00113	AMCB4FGBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P dual)

OEM part number	AMCB4FGBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FGB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00109	AMCB4FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)

OEM part number	AMCB4FJFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in	A	same as above
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00111	AMCB4FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P dual)

OEM part number	AMCB4FJFPTF	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 36-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00114	AMCB4GBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)

OEM part number	AMCB4GBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4GB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in	A	same as above
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00102	AMCB4QDFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)

OEM part number	AMCB4QDFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4QD (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TQD, THQD	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Kit contents	A&C pole outer strap; A&C pole inner strap; carriage bolt 1/4-20; conical spring washer; nut 1/4-20; B pole strap; inner mounting bracket; thread-forming screw; outer mounting bracket; screw 1/4-20; conical spring washer; screw #10-32 x 2-x/x in; lock washer #10; antiturn clip (quantities not legible in mirror)	A	S27 DEH065 Table 1; oem_spec
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	S16 p.11-43; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips, conical spring washers and nuts; unused strap surfaces insulated with UL 105 C tape (min 0.013 in)	A	S27 DEH065 steps 3, 6; oem_spec
Torque values	Bracket thread-forming screws 35 in-lb; breaker-to-bracket #10-32 screws 35 in-lb; line terminal to strap 1/4-20 screws 50 in-lb	A	S27 DEH065 steps 4-5; oem_spec
OEM instruction document	DEH065 (Spectra Series Power Panelboards Bolt-On Circuit Breaker Kits AMCB6QD/AMCB4QD)	A	S27, S16 DEH065 p.1; BuyLog p.11-52; oem_spec
Identification features	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole	A	S27 DEH065 step 2-3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP2QDD (EDH-GEA-00128)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00103	AMCB4SEFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SEP, 2P dual)

OEM part number	AMCB4SEFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4SE (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	THED, SED, SEH, SEL, SEP	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00104	AMCB6EBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SEH, SEL, SEP, 3P dual)

OEM part number	AMCB6EBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6EB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00105	AMCB6EYFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)

OEM part number	AMCB6EYFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6EY (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TEY	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-062 (TEY)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00106	AMCB6FBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P dual)

OEM part number	AMCB6FBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00107	AMCB6FDBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FCL, 3P dual)

OEM part number	AMCB6FDBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FDB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00115	AMCB6FGBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P dual)

OEM part number	AMCB6FGBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FGB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00110	AMCB6FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)

OEM part number	AMCB6FJFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in	A	same as above
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00112	AMCB6FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P dual)

OEM part number	AMCB6FJFPTF	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 36-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00116	AMCB6GBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)

OEM part number	AMCB6GBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6GB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in	A	same as above
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00108	AMCB6QDFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)

OEM part number	AMCB6QDFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6QD (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TQD, THQD	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Kit contents	A&C pole outer strap; A&C pole inner strap; carriage bolt 1/4-20; conical spring washer; nut 1/4-20; B pole strap; inner mounting bracket; thread-forming screw; outer mounting bracket; screw 1/4-20; conical spring washer; screw #10-32 x 2-x/x in; lock washer #10; antiturn clip (quantities not legible in mirror)	A	S27 DEH065 Table 1; oem_spec
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	S16 p.11-43; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips, conical spring washers and nuts; unused strap surfaces insulated with UL 105 C tape (min 0.013 in)	A	S27 DEH065 steps 3, 6; oem_spec
Torque values	Bracket thread-forming screws 35 in-lb; breaker-to-bracket #10-32 screws 35 in-lb; line terminal to strap 1/4-20 screws 50 in-lb	A	S27 DEH065 steps 4-5; oem_spec
OEM instruction document	DEH065 (Spectra Series Power Panelboards Bolt-On Circuit Breaker Kits AMCB6QD/AMCB4QD)	A	S27, S16 DEH065 p.1; BuyLog p.11-52; oem_spec
Identification features	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole	A	S27 DEH065 step 2-3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP3QDD (EDH-GEA-00133)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00181	**AMC2FGMFP**	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single branch or main)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00179	**AMC2FJFP**	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branch or main)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00178	**AMC2FJFPTF**	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branch or main)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00184	**AMC2FLSFP**	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00182	**AMC2GMFP**	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00180	**AMC2JKFP**	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single branch or main)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00183	**AMC2KMFP**	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single branch or main)	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in) **A**	unknown
EDH-GEA-00162	**AMC3FGMFP**	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single branch or main)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00160	**AMC3FJFP**	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branch or main)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00159	**AMC3FJFPTF**	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branch or main)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00165	**AMC3FLSFP**	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00163	**AMC3GMFP**	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00161	**AMC3JKFP**	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single branch or main)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00164	**AMC3KMFP**	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single branch or main)	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in) **A**	unknown
EDH-GEA-00167	**AMC4EBFP**	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	TEB, TED **A**	unknown
EDH-GEA-00176	**AMC4EBSFP**	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00166	**AMC4FDBFP**	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00175	**AMC4FDSFP**	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00173	**AMC4FGBFP**	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double branch)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00171	**AMC4FJFP**	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00170	**AMC4FJFPTF**	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branch)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00177	**AMC4FLSFP**	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00174	**AMC4GBFP**	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double branch)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00172	**AMC4JKFP**	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double branch)	TJD, TJJ / TJK, THJK **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00169	**AMC4QDFP**	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	TQD, THQD **A**	unknown
EDH-GEA-00168	**AMC4SEFP**	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED; double branch)	SEDA, SEHA, SELA, SEPA, THED **A**	unknown
EDH-GEA-00149	**AMC6EBFP**	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SELA, SEPA; double branch)	TEB, TED, THED, SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00157	**AMC6EBSFP**	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00146	**AMC6EYFP**	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	TEY **A**	unknown
EDH-GEA-00147	**AMC6FBFP**	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double branch)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00148	**AMC6FDBFP**	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00156	**AMC6FDSPF**	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00154	**AMC6FGBFP**	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double branch)	FGL, FGN, FGH, FGP **A**	unknown
EDH-GEA-00152	**AMC6FJFP**	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00151	**AMC6FJFPTF**	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branch)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00158	**AMC6FLSFP**	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00155	**AMC6GBFP**	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double branch)	SGDA, SGHA, SGLA, SGPA (SGDA 400 A max) **A**	unknown
EDH-GEA-00153	**AMC6JKFP**	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double branch)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00145	**AMC6QBFP**	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	THQB, THHQB **A**	unknown
EDH-GEA-00150	**AMC6QDFP**	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	TQD, THQD **A**	unknown

EDH-GEA-00181	AMC2FGMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single branch or main)

OEM part number	AMC2FGMFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FGM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4FGS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGS (EDH-GEA-00141)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00179	AMC2FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branch or main)

OEM part number	AMC2FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 250 A, includes filler plate kit AFP3SFS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	AFP3SFS (EDH-GEA-00139)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00178	AMC2FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branch or main)

OEM part number	AMC2FJFPTF	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 225 A, includes filler plate kit AFP3TFS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Requires	AFP3TFS (EDH-GEA-00140)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00184	AMC2FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)

OEM part number	AMC2FLSFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main adjacent to switch, max 250 A, includes filler plate kit AFP4SFS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00182	AMC2GMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)

OEM part number	AMC2GMFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2GM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4SGS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Bus clip screws 27-32 in-lb; hex-head screws with Belleville washers 90-110 in-lb (stud-post side); round-head screws with flat washers 40-50 in-lb; latch screws 25 in-lb	A	S28 GEH5674 steps 1-3; oem_spec
OEM instruction document	GEH5674 (2-pole) / GEH-5673 (3-pole) SGDA/SGHA/SGLA/SGPA modules	A	S28, S16 GEH5674 p.1; BuyLog p.11-52; oem_spec
Identification features	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices)	A	S28 GEH5674 figs 1-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGS (EDH-GEA-00142)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00180	AMC2JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single branch or main)

OEM part number	AMC2JKFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 400/600 A, includes filler plate kit AFP6TJS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	400/600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00183	AMC2KMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single branch or main)

OEM part number	AMC2KMFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2KM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 1200 A, includes filler plate kit AFP6SKS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in)	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	1200 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6SKS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5623 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Requires	AFP6SKS (EDH-GEA-00144)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00162	AMC3FGMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single branch or main)

OEM part number	AMC3FGMFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FGM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4FGS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGS (EDH-GEA-00141)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00160	AMC3FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branch or main)

OEM part number	AMC3FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 250 A, includes filler plate kit AFP3SFS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	AFP3SFS (EDH-GEA-00139)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00159	AMC3FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branch or main)

OEM part number	AMC3FJFPTF	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 225 A, includes filler plate kit AFP3TFS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Requires	AFP3TFS (EDH-GEA-00140)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00165	AMC3FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)

OEM part number	AMC3FLSFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main adjacent to switch, max 250 A, includes filler plate kit AFP4SFS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00163	AMC3GMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)

OEM part number	AMC3GMFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3GM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4SGS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
Torque values	Bus clip screws 27-32 in-lb; hex-head screws with Belleville washers 90-110 in-lb (stud-post side); round-head screws with flat washers 40-50 in-lb; latch screws 25 in-lb	A	S28 GEH5674 steps 1-3; oem_spec
OEM instruction document	GEH5674 (2-pole) / GEH-5673 (3-pole) SGDA/SGHA/SGLA/SGPA modules	A	S28, S16 GEH5674 p.1; BuyLog p.11-52; oem_spec
Identification features	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices)	A	S28 GEH5674 figs 1-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGS (EDH-GEA-00142)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00161	AMC3JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single branch or main)

OEM part number	AMC3JKFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 400/600 A, includes filler plate kit AFP6TJS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	400/600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00164	AMC3KMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single branch or main)

OEM part number	AMC3KMFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3KM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 1200 A, includes filler plate kit AFP6SKS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in)	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	1200 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6SKS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5623 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Requires	AFP6SKS (EDH-GEA-00144)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00167	AMC4EBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)

OEM part number	AMC4EBFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4EB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 150 A, includes filler plate kit AFP2TED	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TEB, TED	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP2TED); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Requires	AFP2TED (EDH-GEA-00129)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00176	AMC4EBSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)

OEM part number	AMC4EBSFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4EBS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 150 A, includes filler plate kit AFP4SED	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SED); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00166	AMC4FDBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)

OEM part number	AMC4FDBFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FDB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 100 A, includes filler plate kit AFP3FDD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FDD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00175	AMC4FDSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)

OEM part number	AMC4FDSFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FDS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 100 A, includes filler plate kit AFP4FDD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FDD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00173	AMC4FGBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double branch)

OEM part number	AMC4FGBFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FGB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 600 A, includes filler plate kit AFP4FGD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGD (EDH-GEA-00137)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00171	AMC4FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branch)

OEM part number	AMC4FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 250 A, includes filler plate kit AFP3SFD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	AFP3SFD (EDH-GEA-00135)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00170	AMC4FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branch)

OEM part number	AMC4FJFPTF	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 225 A, includes filler plate kit AFP3TFD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Requires	AFP3TFD (EDH-GEA-00136)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00177	AMC4FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)

OEM part number	AMC4FLSFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 250 A, includes filler plate kit AFP4SFD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00174	AMC4GBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double branch)

OEM part number	AMC4GBFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4GB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 600 A, includes filler plate kit AFP4SGD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGD (EDH-GEA-00138)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00172	AMC4JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double branch)

OEM part number	AMC4JKFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 400/600 A, includes filler plate kit AFP6TJD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	400/600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00169	AMC4QDFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)

OEM part number	AMC4QDFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4QD (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 225 A, includes filler plate kit AFP2QDD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TQD, THQD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP2QDD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	2X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5643 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP2QDD (EDH-GEA-00128)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00168	AMC4SEFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED; double branch)

OEM part number	AMC4SEFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4SE (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 150 A, includes filler plate kit AFP3SED	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA, THED	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SED); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AFP3SED (EDH-GEA-00134)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00149	AMC6EBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SELA, SEPA; double branch)

OEM part number	AMC6EBFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 150 A, includes filler plate kit AFP3SED	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TEB, TED, THED, SEDA, SEHA, SELA, SEPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SED); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Requires	AFP3SED (EDH-GEA-00134)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00157	AMC6EBSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)

OEM part number	AMC6EBSFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EBS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 150 A, includes filler plate kit AFP4SED	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SED); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00146	AMC6EYFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)

OEM part number	AMC6EYFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EY (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3EYD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TEY	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3EYD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5677 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	AFP3EYD (EDH-GEA-00130)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00147	AMC6FBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double branch)

OEM part number	AMC6FBFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3FBD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FBD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Requires	AFP3FBD (EDH-GEA-00132)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00148	AMC6FDBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)

OEM part number	AMC6FDBFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FDB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3FDD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FDD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00156	AMC6FDSPF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)

OEM part number	AMC6FDSPF	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FDSPF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 100 A, includes filler plate kit AFP4FDD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FDD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00154	AMC6FGBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double branch)

OEM part number	AMC6FGBFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FGB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 600 A, includes filler plate kit AFP4FGD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FGL, FGN, FGH, FGP	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGD (EDH-GEA-00137)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00152	AMC6FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branch)

OEM part number	AMC6FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 250 A, includes filler plate kit AFP3SFD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	AFP3SFD (EDH-GEA-00135)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00151	AMC6FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branch)

OEM part number	AMC6FJFPTF	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 225 A, includes filler plate kit AFP3TFD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Requires	AFP3TFD (EDH-GEA-00136)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00158	AMC6FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)

OEM part number	AMC6FLSFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 250 A, includes filler plate kit AFP4SFD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00155	AMC6GBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double branch)

OEM part number	AMC6GBFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6GB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 600 A, includes filler plate kit AFP4SGD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA (SGDA 400 A max)	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGD (EDH-GEA-00138)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00153	AMC6JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double branch)

OEM part number	AMC6JKFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 400/600 A, includes filler plate kit AFP6TJD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	400/600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00145	AMC6QBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)

OEM part number	AMC6QBFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6QB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3QBD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	THQB, THHQB	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3QBD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5677 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: THQB / THHQB / TXQB		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00150	AMC6QDFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)

OEM part number	AMC6QDFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6QD (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 225 A, includes filler plate kit AFP3QDD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TQD, THQD	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3QDD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5643 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP3QDD (EDH-GEA-00133)		
Not yet documented	bus clip/connector part numbers, Material, Status		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00235	**ANK120D**	Spectra neutral kit ANK120D	—	unknown
EDH-GEA-00234	**ANK800D**	Spectra neutral kit ANK800D	—	unknown
EDH-GEA-00233	**ANKN120**	Spectra neutral kit ANKN120	—	unknown
EDH-GEA-00232	**ANKN400**	Spectra neutral kit ANKN400	—	unknown

EDH-GEA-00235	ANK120D	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANK120D

OEM part number	ANK120D	A	S16 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit plug-in, 1200 A dual main: 8 main #2-500kcmil, 8 x #14-2/0, 10 x #6-300kcmil, 4 x #2-500kcmil; includes mechanical lugs and bonding strap	A	S16 p.11-45; oem_spec
Current rating	1200 A	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00234	ANK800D	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANK800D

OEM part number	ANK800D	A	S16 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit plug-in, 800 A dual main: 8 main #2-500kcmil, 8 x #14-2/0, 10 x #6-300kcmil, 4 x #2-500kcmil; includes mechanical lugs and bonding strap	A	S16 p.11-45; oem_spec
Current rating	800 A	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00233	ANKN120	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANKN120

OEM part number	ANKN120	A	S16 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit bolt-on, 600/800/1200 A, single/dual: 8 main #2-600kcmil, 9 x #14-2/0, 10 x #6-300kcmil, 10 x #14-#4; includes mechanical lugs and bonding strap	A	S16 p.11-45; oem_spec
Current rating	600-1200 A	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00232	ANKN400	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANKN400

OEM part number	ANKN400	A	S16 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit bolt-on, 250/400 A, single/dual main: 2 main lugs #2-600kcmil, 16 x #14-2/0, 5 x #6-300kcmil, 24 x #14-#4; includes mechanical lugs and bonding strap	A	S16 p.11-45; oem_spec
Current rating	250/400 A	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00236	**AEG10**	Spectra equipment ground kit AEG10	—	unknown
EDH-GEA-00237	**AEG21**	Spectra equipment ground kit AEG21	—	unknown
EDH-GEA-00238	**AEG21S**	Spectra equipment ground kit AEG21S	—	unknown
EDH-GEA-00239	**AEG31S**	Spectra equipment ground kit AEG31S	—	unknown
EDH-GEA-00240	**AEG47**	Spectra equipment ground kit AEG47	—	unknown
EDH-GEA-00241	**AEG47S**	Spectra equipment ground kit AEG47S	—	unknown

EDH-GEA-00236	AEG10	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG10

OEM part number	AEG10	A	S16 p.11-45; oem_spec
Description	Equipment ground kit, bonded, 10 circuits, 10 wires #6-2/0 Cu/Al (cartons of 10)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00237	AEG21	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG21

OEM part number	AEG21	A	S16 p.11-45; oem_spec
Description	Equipment ground kit, bonded, 21 circuits, 9 wires	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00238	AEG21S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG21S

OEM part number	AEG21S	A	S16 p.11-45; oem_spec
Description	Equipment ground kit, insulated/isolated, 21 circuits	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00239	AEG31S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG31S

OEM part number	AEG31S	A	S16 p.11-45; oem_spec
Description	Equipment ground kit, insulated/isolated, 31 circuits, 10 wires #6-2/0	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00240	AEG47	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG47

OEM part number	AEG47	A	S30 DEH212; oem_spec
Description	Equipment ground, bonded for Spectra Series panelboards	A	same as above
Installation location	Box back, positioned as required	A	S30 DEH212 step 1; oem_spec
Fasteners	Four #10-32 self-tapping screws in field-drilled 0.173 in holes in box back (no mounting holes provided)	A	same as above
Torque values	#10-32 mounting screws 32 in-lb	A	S30 DEH212 step 2; oem_spec
OEM instruction document	DEH212 R02	A	S30 oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, number of terminals, Status		

EDH-GEA-00241	AEG47S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG47S

OEM part number	AEG47S	A	S30 DEH212; oem_spec
Description	Equipment ground, isolated for Spectra Series panelboards	A	same as above
Installation location	Box back, positioned as required	A	S30 DEH212 step 1; oem_spec
Fasteners	Four #10-32 self-tapping screws in field-drilled 0.173 in holes in box back (no mounting holes provided)	A	same as above
Torque values	#10-32 mounting screws 32 in-lb	A	S30 DEH212 step 2; oem_spec
OEM instruction document	DEH212 R02	A	S30 oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, number of terminals, Status		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00131	**AFP2FBD**	Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00128	**AFP2QDD**	Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00129	**AFP2TED**	Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)	TEB, TED **A**	unknown
EDH-GEA-00130	**AFP3EYD**	Spectra breaker filler plate kit AFP3EYD (TEY, dual)	TEY **A**	unknown
EDH-GEA-00132	**AFP3FBD**	Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00133	**AFP3QDD**	Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00134	**AFP3SED**	Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, dual)	TEB, TED, THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00135	**AFP3SFD**	Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00139	**AFP3SFS**	Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)	SFH, SFL, SFP **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00136	**AFP3TFD**	Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00140	**AFP3TFS**	Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00137	**AFP4FGD**	Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00141	**AFP4FGS**	Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00138	**AFP4SGD**	Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00142	**AFP4SGS**	Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00143	**AFP5LCS**	Spectra breaker filler plate kit AFP5LCS (SKP, single)	SKP **A**	unknown
EDH-GEA-00144	**AFP6SKS**	Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)	SKP, SKH, SKL, TKM, THKM **A**	unknown
EDH-GEA-00244	**AMCB6TEDL**	Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter	—	unknown
EDH-GEA-00202	**APP1**	Spectra blank filler plate 1X (36, 40 in box)	—	unknown
EDH-GEA-00201	**APP1S**	Spectra blank filler plate 1X (27, 31 in box)	—	unknown
EDH-GEA-00203	**APP1W**	Spectra blank filler plate 1X (44 in box)	—	unknown
EDH-GEA-00205	**APP2**	Spectra blank filler plate 2X (36, 40 in box)	—	unknown
EDH-GEA-00204	**APP2S**	Spectra blank filler plate 2X (27, 31 in box)	—	unknown
EDH-GEA-00206	**APP2W**	Spectra blank filler plate 2X (44 in box)	—	unknown
EDH-GEA-00208	**APP3**	Spectra blank filler plate 3X (36, 40 in box)	—	unknown
EDH-GEA-00207	**APP3S**	Spectra blank filler plate 3X (27, 31 in box)	—	unknown
EDH-GEA-00209	**APP3W**	Spectra blank filler plate 3X (44 in box)	—	unknown
EDH-GEA-00211	**APP4**	Spectra blank filler plate 4X (36, 40 in box)	—	unknown
EDH-GEA-00210	**APP4S**	Spectra blank filler plate 4X (27, 31 in box)	—	unknown
EDH-GEA-00212	**APP4W**	Spectra blank filler plate 4X (44 in box)	—	unknown
EDH-GEA-00214	**APP5**	Spectra blank filler plate 5X (36, 40 in box)	—	unknown
EDH-GEA-00213	**APP5S**	Spectra blank filler plate 5X (27, 31 in box)	—	unknown
EDH-GEA-00215	**APP5W**	Spectra blank filler plate 5X (44 in box)	—	unknown
EDH-GEA-00217	**APP6**	Spectra blank filler plate 6X (36, 40 in box)	—	unknown
EDH-GEA-00216	**APP6S**	Spectra blank filler plate 6X (27, 31 in box)	—	unknown
EDH-GEA-00218	**APP6W**	Spectra blank filler plate 6X (44 in box)	—	unknown

EDH-GEA-00131 AFP2FBD — GE — filler-plate — STATUS UNKNOWN

Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)

OEM part number	AFP2FBD	**A**	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	**A**	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	**A**	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	**A**	S16 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00128	AFP2QDD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)

OEM part number	AFP2QDD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TQD, THQD	A	S16 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	A	same as above
OEM instruction document	Used with AMCB4QD/AMCB6QD per DEH065	A	S27 DEH065 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00129	AFP2TED	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)

OEM part number	AFP2TED	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEB, TED	A	S16 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00130	AFP3EYD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3EYD (TEY, dual)

OEM part number	AFP3EYD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEY	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00132	AFP3FBD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)

OEM part number	AFP3FBD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00133	AFP3QDD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)

OEM part number	AFP3QDD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TQD, THQD	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
OEM instruction document	Used with AMCB4QD/AMCB6QD per DEH065	A	S27 DEH065 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00134	AFP3SED	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, dual)

OEM part number	AFP3SED	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00135	AFP3SFD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)

OEM part number	AFP3SFD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 31-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00139	AFP3SFS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)

OEM part number	AFP3SFS	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00136	AFP3TFD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)

OEM part number	AFP3TFD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-43; oem_spec
Dimensions	2X, 3X vertical; box width 36-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00140	AFP3TFS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)

OEM part number	AFP3TFS	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00137	AFP4FGD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)

OEM part number	AFP4FGD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-43; oem_spec
Dimensions	4X vertical; box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00141	AFP4FGS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)

OEM part number	AFP4FGS	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-43; oem_spec
Dimensions	4X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00138	AFP4SGD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)

OEM part number	AFP4SGD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S16 p.11-43; oem_spec
Dimensions	4X vertical; box width 40-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00142	AFP4SGS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)

OEM part number	AFP4SGS	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S16 p.11-43; oem_spec
Dimensions	4X vertical; box width 27-44 in	A	same as above
OEM instruction document	GEH5674: install filler plate kit AFP4SGS on AMC2GM/AMC3GM module	A	S28 GEH5674 step 5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00143	AFP5LCS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP5LCS (SKP, single)

OEM part number	AFP5LCS	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2-pole	A	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SKP	A	S16 p.11-43; oem_spec
Dimensions	6X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00144	AFP6SKS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)

OEM part number	AFP6SKS	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SKP, SKH, SKL, TKM, THKM	A	S16 p.11-43; oem_spec
Dimensions	6X vertical; box width 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00244	AMCB6TEDL	GE	filler-plate	STATUS UNKNOWN

Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter

OEM part number	AMCB6TEDL	A	S29 p.1; oem_spec
Description	Circuit breaker cover kit for TED136 breaker with TEDL36 current limiter on Spectra APNB bolt-on interiors; 3X (4.125 in) vertical space	A	same as above
Kit contents	(1) filler 36/40W TEDL DB 3X 168D1930P3; (1) filler 44/45W 168D1930P4; (2) cover support 3X 208C1850P3; (1) barrier center 252B1667P1; (1) spacer plate TED6 w/TEDL 252B2056P8; (2) steel drive rivet #10 x 1/2 331A3329P2; (2) thread-forming screw 10-32 x 3/8 N722EP16006B6; instruction DEH40392	A	S29 Table 1; oem_spec
Dimensions	3X = 4.125 in vertical; fits 36W/40W/44W panelboards and 40W/45W switchboards	A	S29 p.1; oem_spec
OEM instruction document	DEH40392 R01	A	S29 oem_spec
Identification features	Push-on filler snaps over flexible prongs on filler supports; barrier center riveted to filler	A	S29 steps 2-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, Status		

EDH-GEA-00202	APP1	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (36, 40 in box)

OEM part number	APP1	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	same as above
Dimensions	1X = 1 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00201	APP1S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (27, 31 in box)

OEM part number	APP1S	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	same as above
Dimensions	1X = 1 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00203	APP1W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (44 in box)

OEM part number	APP1W	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	same as above
Dimensions	1X = 1 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00205	APP2	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (36, 40 in box)

OEM part number	APP2	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	same as above
Dimensions	2X = 2 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00204	APP2S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (27, 31 in box)

OEM part number	APP2S	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	same as above
Dimensions	2X = 2 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00206	APP2W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (44 in box)

OEM part number	APP2W	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	same as above
Dimensions	2X = 2 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00208	APP3	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (36, 40 in box)

OEM part number	APP3	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	same as above
Dimensions	3X = 3 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00207	APP3S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (27, 31 in box)

OEM part number	APP3S	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	same as above
Dimensions	3X = 3 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00209	APP3W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (44 in box)

OEM part number	APP3W	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	same as above
Dimensions	3X = 3 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00211	APP4	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (36, 40 in box)

OEM part number	APP4	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	same as above
Dimensions	4X = 4 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00210	APP4S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (27, 31 in box)

OEM part number	APP4S	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	same as above
Dimensions	4X = 4 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00212	APP4W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (44 in box)

OEM part number	APP4W	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	same as above
Dimensions	4X = 4 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00214	APP5	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (36, 40 in box)

OEM part number	APP5	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	same as above
Dimensions	5X = 5 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00213	APP5S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (27, 31 in box)

OEM part number	APP5S	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	same as above
Dimensions	5X = 5 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00215	APP5W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (44 in box)

OEM part number	APP5W	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	same as above
Dimensions	5X = 5 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00217	APP6	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (36, 40 in box)

OEM part number	APP6	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	same as above
Dimensions	6X = 6 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00216	APP6S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (27, 31 in box)

OEM part number	APP6S	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	same as above
Dimensions	6X = 6 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00218	APP6W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (44 in box)

OEM part number	APP6W	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	same as above
Dimensions	6X = 6 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00194	**AHKBE1**	Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)	SE A	unknown
EDH-GEA-00195	**AHKBF1**	Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)	SF A	unknown
EDH-GEA-00200	**AHKBFB1**	Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)	FB A	unknown
EDH-GEA-00198	**AHKBFD1**	Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)	FCS, FCV, FCN, FCH, FCL A	unknown
EDH-GEA-00199	**AHKBFG1**	Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)	FGV, FGN, FGH, FGP A	unknown
EDH-GEA-00196	**AHKBG1**	Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)	SG A	unknown
EDH-GEA-00197	**AHKBQ1**	Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)	THQD A	unknown
EDH-GEA-00185	**AHKE1**	Spectra plug-in single-breaker mounting hardware AHKE1	For AMC modules: AMC6EB, AMC4SE, AMC4EB, AMC6EBS A	unknown
EDH-GEA-00186	**AHKEL1**	Spectra plug-in single-breaker mounting hardware AHKEL1	For AMC modules: AMC6EL A	unknown
EDH-GEA-00187	**AHKF1**	Spectra plug-in single-breaker mounting hardware AHKF1	For AMC modules: AMC2FLS, AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC A	unknown
EDH-GEA-00192	**AHKFD1**	Spectra plug-in single-breaker mounting hardware AHKFD1	For AMC modules: FCS/FCV/FCN/FCH/FCL modules A	unknown
EDH-GEA-00193	**AHKFG1**	Spectra plug-in single-breaker mounting hardware AHKFG1	For AMC modules: FGV/FGN/FGH/FGP modules A	unknown
EDH-GEA-00188	**AHKG1**	Spectra plug-in single-breaker mounting hardware AHKG1	For AMC modules: AMC2GM, AMC6GB, AMC4GB, AMC3GM A	unknown
EDH-GEA-00189	**AHKJ1**	Spectra plug-in single-breaker mounting hardware AHKJ1	For AMC modules: AMC2JK, AMC6JK, AMC4JK, AMC3JK A	unknown
EDH-GEA-00190	**AHKLB1**	Spectra plug-in single-breaker mounting hardware AHKLB1	For AMC modules: AMC3LB, AMC6LB A	unknown
EDH-GEA-00191	**AHKQ1**	Spectra plug-in single-breaker mounting hardware AHKQ1	For AMC modules: AMC4QD, AMC6QD A	unknown

EDH-GEA-00194	AHKBE1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)

OEM part number	AHKBE1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	SE	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00195	AHKBF1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)

OEM part number	AHKBF1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	SF	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00200	AHKBFB1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)

OEM part number	AHKBFB1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00198	AHKBFD1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)

OEM part number	AHKBFD1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00199	AHKBFG1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)

OEM part number	AHKBFG1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FGV, FGN, FGH, FGP	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00196	AHKBG1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)

OEM part number	AHKBG1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	SG	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00197	AHKBQ1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)

OEM part number	AHKBQ1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	THQD	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00185	AHKE1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKE1

OEM part number	AHKE1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC6EB, AMC4SE, AMC4EB, AMC6EBS (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00186	AHKEL1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKEL1

OEM part number	AHKEL1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC6EL (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00187	AHKF1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKF1

OEM part number	AHKF1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC2FLS, AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC3FLS, AMC4FLS (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00192	AHKFD1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKFD1

OEM part number	AHKFD1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: FCS/FCV/FCN/FCH/FCL modules (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00193	AHKFG1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKFG1

OEM part number	AHKFG1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: FGV/FGN/FGH/FGP modules (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00188	AHKG1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKG1

OEM part number	AHKG1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC2GM, AMC6GB, AMC4GB, AMC3GM (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00189	AHKJ1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKJ1

OEM part number	AHKJ1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC2JK, AMC6JK, AMC4JK, AMC3JK (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00190	AHKLB1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKLB1

OEM part number	AHKLB1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC3LB, AMC6LB (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00191	AHKQ1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKQ1

OEM part number	AHKQ1	**A**	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	**A**	same as above
Breaker compatibility	For AMC modules: AMC4QD, AMC6QD (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	**A**	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	**B**	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Kit contents, Material, Status		

5.9 AV-LINE — AV-Line switchboards (legacy)

FAM-GEA-009 · switchboard · aka AV Line, AV-Line · markings: General Electric

Legacy GE distribution switchboard; only surplus listings (800-1600 A, 208Y/120 to 480Y/277 V, Power Break mains) were found. No OEM document located.

Attribute	Value	Cl.	Sources
ratings	Surplus units listed at 800, 1200, 1600 A; 120/208 and 480 V 3ph4w	**C**	S37 surplus_listing

Key documents: S37 Surplus Record listings: General Electric AV-Line switchboards (800/1200/1600 A)

5.10 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family E150 line (TEB, TED, THED, TEC)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00287	**TC012**	GE TC012 copper-only lug, E150/TB1 thru 150A	E150, TB1 (thru 150 A) **A**	current
EDH-GEA-00284	**TCAL12**	GE TCAL12 lug, E150/THLC1/TB1 15-60A	E150, THLC1, TB1; 15-60 A **A**	current
EDH-GEA-00285	**TCAL12A**	GE TCAL12A lug, E150/THLC1/TB1 70-90A	E150, THLC1, TB1; 70-90 A **A**	current
EDH-GEA-00283	**TCAL14**	GE TCAL14 lug, E150/THLC1/TB1 15-30A, (1) #14-8	E150 (TEB/TED/THED), THLC1, TB1; 15-30 A **A**	current
EDH-GEA-00286	**TCAL15**	GE TCAL15 lug, E150/THLC1/TB1 100-150A	E150, THLC1, TB1; 100-150 A **A**	current

EDH-GEA-00287	TC012	GE	lug	CURRENT

GE TC012 copper-only lug, E150/TB1 thru 150A

OEM part number	TC012	**A**	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150, TB1 (thru 150 A)	**A**	same as above
Kit contents	1 lug; wire range #14-2/0 Cu	**A**	same as above
Material	{'value': 'Copper (copper-only lug, with follower and extra plating)', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00284	TCAL12	GE	lug	CURRENT

GE TCAL12 lug, E150/THLC1/TB1 15-60A

OEM part number	TCAL12	A	S112, S114, S116 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150, THLC1, TB1; 15-60 A	A	same as above
Current rating	15-60 A	A	same as above
Kit contents	1 lug; wire range (1) #14-3 Cu, #12-1 Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00285	TCAL12A	GE	lug	CURRENT

GE TCAL12A lug, E150/THLC1/TB1 70-90A

OEM part number	TCAL12A	A	S112, S114, S116 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150, THLC1, TB1; 70-90 A	A	same as above
Current rating	70-90 A	A	same as above
Kit contents	1 lug; wire range (1) #6-2/0 Cu, #4-2/0 Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00283	TCAL14	GE	lug	CURRENT

GE TCAL14 lug, E150/THLC1/TB1 15-30A, (1) #14-8

OEM part number	TCAL14	A	S112, S114, S116 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150 (TEB/TED/THED), THLC1, TB1; 15-30 A	A	same as above
Current rating	15-30 A	A	same as above
Kit contents	1 lug; wire range (1) #14-8	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00286	TCAL15	GE	lug	CURRENT

GE TCAL15 lug, E150/THLC1/TB1 100-150A

OEM part number	TCAL15	A	S112, S114, S116 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150, THLC1, TB1; 100-150 A	A	same as above
Current rating	100-150 A	A	same as above
Kit contents	1 lug; wire range (1) #3-3/0 Cu, #1-3/0 Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00325	**TEDLS**	GE TEDLS line shield, TEB/TEC/TED/THED	TEB, TEC, TED, THED A	current

EDH-GEA-00325	TEDLS	GE	barrier	CURRENT

GE TEDLS line shield, TEB/TEC/TED/THED

OEM part number	TEDLS	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line shield	A	same as above
Application	accessory	A	same as above
Installation location	Line end of breaker	C	S112, S114 s1 p. 6-102; s3 p. 3-120; inference
Breaker compatibility	TEB, TEC, TED, THED	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Fasteners, OEM instruction document, Kit contents, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00386	**TEF1**	GE TEF1 back-connected line/load stud, E150 2-pole, TB1, THLC1, 2 25/32 in (short)	E150 2-pole, TB1, THLC1 / SE150 (50 A) A	current
EDH-GEA-00387	**TEF2**	GE TEF2 back-connected line/load stud, E150 2-pole, TB1, THLC1, 4 13/32 in (long)	E150 2-pole, TB1, THLC1 / SE150 (50 A) A	current
EDH-GEA-00388	**TEF3**	GE TEF3 back-connected line/load stud, E150 2-pole, TB1, THLC1, 3 13/32 in (short)	E150 2-pole, TB1, THLC1 / SE150 (150 A) A	current
EDH-GEA-00389	**TEF4**	GE TEF4 back-connected line/load stud, E150 2-pole, TB1, THLC1, 5 25/32 in (long)	E150 2-pole, TB1, THLC1 / SE150 (150 A) A	current

EDH-GEA-00386	TEF1	GE	breaker-accessory	CURRENT

GE TEF1 back-connected line/load stud, E150 2-pole, TB1, THLC1, 2 25/32 in (short)

OEM part number	TEF1	A	S112 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (50 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 2 25/32 in (short)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00387	TEF2	GE	breaker-accessory	CURRENT

GE TEF2 back-connected line/load stud, E150 2-pole, TB1, THLC1, 4 13/32 in (long)

OEM part number	TEF2	A	S112 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (50 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 4 13/32 in (long)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00388	TEF3	GE	breaker-accessory	CURRENT

GE TEF3 back-connected line/load stud, E150 2-pole, TB1, THLC1, 3 13/32 in (short)

OEM part number	TEF3	A	S112 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (150 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 3 13/32 in (short)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00389	TEF4	GE	breaker-accessory	CURRENT

GE TEF4 back-connected line/load stud, E150 2-pole, TB1, THLC1, 5 25/32 in (long)

OEM part number	TEF4	A	S112 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (150 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 5 25/32 in (long)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

Breaker family F225 line (TFJ, TFK, THFK, TFC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00289	**TCALK324**	GE TCALK324 3-lug kit, F225	F225 A	current

EDH-GEA-00289	TCALK324	GE	lug-kit	CURRENT

GE TCALK324 3-lug kit, F225

OEM part number	TCALK324	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F225	A	same as above
Kit contents	3 lugs; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00290	**TC024**	GE TC024 copper-only lug, TFJ 250A	TFJ (250 A) A	current
EDH-GEA-00288	**TCAL24**	GE TCAL24 lug, F225, (1) #4-300 kcmil Cu-Al	F225 (TFJ/TFK/THFK) A	current
EDH-GEA-00291	**TCAL27**	GE TCAL27 lug, THLC2, (1) #4-300 kcmil Cu-Al	THLC2 A	discontinued

EDH-GEA-00290	TC024	GE	lug	CURRENT

GE TC024 copper-only lug, TFJ 250A

OEM part number	TC024	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ (250 A)	A	same as above
Kit contents	1 lug; wire range #4-300 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00288	TCAL24	GE	lug	CURRENT

GE TCAL24 lug, F225, (1) #4-300 kcmil Cu-Al

OEM part number	TCAL24	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F225 (TFJ/TFK/THFK)	A	same as above
Kit contents	1 lug; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00291	TCAL27	GE	lug	DISCONTINUED

GE TCAL27 lug, THLC2, (1) #4-300 kcmil Cu-Al

OEM part number	TCAL27	A	S114 s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	THLC2	A	same as above
Kit contents	1 lug; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	discontinued (In the 9/12 table but absent from the 11/13 and 1/19 lug tables)	C	S112, S114 s3 p. 3-120; absent from s1 p. 6-102; inference
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Which F225-type frame is THLC2, and what replaced TCAL27 when it left the table?*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00326	**TFKLS**	GE TFKLS line shield, TFJ/TFK/TFC	TFJ, TFK, TFC **A**	current

EDH-GEA-00326	TFKLS	GE	barrier	CURRENT

GE TFKLS line shield, TFJ/TFK/TFC

OEM part number	TFKLS	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ, TFK, TFC	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Fasteners, OEM instruction document, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00390	**TFK1**	GE TFK1 back-connected line/load stud, TFJ, TFK, THFK, 2 23/32 in (short)	TFJ, TFK, THFK / SF250 (225-250 A) **A**	current
EDH-GEA-00391	**TFK2**	GE TFK2 back-connected line/load stud, TFJ, TFK, THFK, 5 31/32 in (long)	TFJ, TFK, THFK / SF250 (225-250 A) **A**	current

EDH-GEA-00390	TFK1	GE	breaker-accessory	CURRENT

GE TFK1 back-connected line/load stud, TFJ, TFK, THFK, 2 23/32 in (short)

OEM part number	TFK1	A	S112 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ, TFK, THFK / SF250 (225-250 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 2 23/32 in (short)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-101; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00391	TFK2	GE	breaker-accessory	CURRENT

GE TFK2 back-connected line/load stud, TFJ, TFK, THFK, 5 31/32 in (long)

OEM part number	TFK2	A	S112 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ, TFK, THFK / SF250 (225-250 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 5 31/32 in (long)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-101; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

Breaker family J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00300	**TCALK343**	GE TCALK343 3-lug kit, TLB4/THLC4	TLB4, THLC4 A	discontinued
EDH-GEA-00294	**TCALK347**	GE TCALK347 3-lug kit, J400/TJD 750 kcmil	J400, TJD A	discontinued
EDH-GEA-00296	**TCALK363**	GE TCALK363 3-lug kit, J600 450-600A	J600 (450-600 A) A	current

EDH-GEA-00300 **TCALK343** GE lug-kit **DISCONTINUED**

GE TCALK343 3-lug kit, TLB4/THLC4

OEM part number	TCALK343	A	S114 s3 p. 3-120; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TLB4, THLC4	A	same as above
Kit contents	3 lugs; wire range (1) 3/0-500 kcmil or (2) 3/0-250 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	discontinued (Not in the 11/13 or 1/19 tables)	C	S112, S114 inference
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00294 **TCALK347** GE lug-kit **DISCONTINUED**

GE TCALK347 3-lug kit, J400/TJD 750 kcmil

OEM part number	TCALK347	A	S114 s3 p. 3-120; oem_spec
Description	3-lug kit (TCAL47 range)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J400, TJD	A	same as above
Kit contents	3 lugs; wire range (1) 750 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	discontinued (In 9/12 but not in the 11/13 or 1/19 tables)	C	S112, S114 absent from s1 p. 6-102; inference
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00296 **TCALK363** GE lug-kit **CURRENT**

GE TCALK363 3-lug kit, J600 450-600A

OEM part number	TCALK363	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600 (450-600 A)	A	same as above
Kit contents	3 lugs; wire range (2) 4/0-350 kcmil Cu or (2) 300-500 kcmil Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00297	**TC043**	GE TC043 copper-only lug, J400/TB4	J400, TB4 A	current
EDH-GEA-00298	**TC063**	GE TC063 copper-only lug, J600	J600 A	current
EDH-GEA-00292	**TCAL43**	GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD	J400, TB4, J600 (thru 400 A), TJD; TJJ/TJK/THJK 400A frame (all rating A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00293	**TCAL47**	GE TCAL47 lug, J400/TJD, (1) 750 kcmil Cu-Al	J400, TJD; alternate on TJJ/TJK 400A **A**	current
EDH-GEA-00295	**TCAL63**	GE TCAL63 lug, J600 450-600A	J600 (450-600 A); TJK/THJK 600A frame 450-600 A **A**	current
EDH-GEA-00299	**TCLK43**	GE TCLK43 lug, TLB4/THLC4	TLB4, THLC4 **A**	current

EDH-GEA-00297 TC043 GE lug CURRENT

GE TC043 copper-only lug, J400/TB4

OEM part number	TC043	**A**	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	J400, TB4	**A**	same as above
Kit contents	1 lug; wire range (1) 6-600 kcmil or (2) 1/0-250 kcmil Cu	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00298 TC063 GE lug CURRENT

GE TC063 copper-only lug, J600

OEM part number	TC063	**A**	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	J600	**A**	same as above
Kit contents	1 lug; wire range (2) 250-350 kcmil Cu	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00292 TCAL43 GE lug CURRENT

GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD

OEM part number	TCAL43	**A**	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-36, 6-37; oem_spec
Alternate / superseded numbers	TCAL433 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL433 / TCAL432'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Footnote 2/3 on p. 6-36/37 reads 'Alternate lug for 750 kcmil Cu/Al cable, Product Number TCAL47'.)	**B**	S112, S114 alias; s1 p. 6-36; s3 TJJ/TJK tables; oem_spec
Description	Copper-aluminum single lug, standard lug on TJJ/TJK 400A frames and on J600 frames rated 250-400 A	**A**	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-36, 6-37; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	J400, TB4, J600 (thru 400 A), TJD; TJJ/TJK/THJK 400A frame (all ratings); TJK/THJK 600A frame 250-400 A	**A**	same as above
Kit contents	1 lug; order 2 per pole; wire range (1) 6-600 kcmil or (2) 2/0-250 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00293	TCAL47	GE	lug	CURRENT

GE TCAL47 lug, J400/TJD, (1) 750 kcmil Cu-Al

OEM part number	TCAL47	A	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-36 fn; oem_spec
Description	Copper-aluminum single lug, alternate lug for 750 kcmil Cu/Al cable on TJJ/TJK	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J400, TJD; alternate on TJJ/TJK 400A	A	same as above
Kit contents	1 lug; wire range (1) 750 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00295	TCAL63	GE	lug	CURRENT

GE TCAL63 lug, J600 450-600A

OEM part number	TCAL63	A	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-37; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600 (450-600 A); TJK/THJK 600A frame 450-600 A	A	same as above
Kit contents	1 lug; order 2 per pole; wire range (2) 4/0-350 kcmil Cu or (2) 300-500 kcmil Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00299	TCLK43	GE	lug	CURRENT

GE TCLK43 lug, TLB4/THLC4

OEM part number	TCLK43	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TLB4, THLC4	A	same as above
Kit contents	1 lug; wire range (1) 3/0-500 kcmil or (2) 3/0-250 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00327	**TJKLS**	GE TJKLS line shield, TJJ/TJK/TJC	TJJ, TJK, TJC A	current

EDH-GEA-00327	TJKLS	GE	barrier	CURRENT

GE TJKLS line shield, TJJ/TJK/TJC

OEM part number	TJKLS	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TJJ, TJK, TJC	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Fasteners, OEM instruction document, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00334	**TJLVK**	GE TJLVK line voltage control wire kit, J600	J600 A	discontinued

EDH-GEA-00334	TJLVK	GE	breaker-accessory	DISCONTINUED

GE TJLVK line voltage control wire kit, J600

OEM part number	TJLVK	A	S114 s3 p. 3-120; oem_spec
Alternate / superseded numbers	TJLVK8 (as printed) [alias] (Footnote 8 = '3-pole kit')	B	same as above
Description	Line voltage control wire kit for terminating control wire at breaker lugs (3-pole kit per footnote)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600	A	same as above
Status	discontinued (Not in the 1/19 table)	C	S112, S114 inference
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00313	**TCALK2121**	GE TCALK2121 2-lug kit with wrench (TCAL121)	K1200 (1000-1200 A) B	current
EDH-GEA-00317	**TCALK2122**	GE TCALK2122 2-lug kit (TCAL122)	K1200 (1200 A) B	current
EDH-GEA-00305	**TCALK261**	GE TCALK261 2-lug kit with wrench, K1200/TB6	K1200, TB6 (300-600 A) A	current
EDH-GEA-00309	**TCALK281**	GE TCALK281 2-lug kit with wrench (TCAL81)	K1200/TB8 600-800 A; Spectra SK1200 300-800 A A	current
EDH-GEA-00320	**TCALK291**	GE TCALK291 2-lug kit, TK4V load end	TK4V - load end B	current
EDH-GEA-00314	**TCALK3121**	GE TCALK3121 3-lug kit with wrench (TCAL121)	K1200 (1000-1200 A) B	current
EDH-GEA-00318	**TCALK3122**	GE TCALK3122 3-lug kit (TCAL122)	K1200 (1200 A) B	current
EDH-GEA-00302	**TCALK341**	GE TCALK341 3-lug kit, K1200/TB6 300-400A	K1200, TB6 (300-400 A) A	discontinued
EDH-GEA-00306	**TCALK361**	GE TCALK361 3-lug kit with wrench, K1200/TB6	K1200, TB6 (300-600 A) A	current
EDH-GEA-00310	**TCALK381**	GE TCALK381 3-lug kit with wrench (TCAL81)	K1200/TB8 600-800 A; Spectra SK1200 300-800 A A	current
EDH-GEA-00321	**TCALK391**	GE TCALK391 3-lug kit, TK4V load end	TK4V - load end B	current

EDH-GEA-00313	TCALK2121	GE	lug-kit	CURRENT

GE TCALK2121 2-lug kit with wrench (TCAL121)

OEM part number	TCALK2121	B	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK21214 / TCALK21212 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK21214/TCALK21212'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	2-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1000-1200 A)	B	same as above
Kit contents	2 lugs + wrench; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00317	TCALK2122	GE	lug-kit	CURRENT

GE TCALK2122 2-lug kit (TCAL122)

OEM part number	TCALK2122	B	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK21225 / TCALK21223 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK21225/TCALK21223'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	2-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1200 A)	B	same as above
Kit contents	2 lugs + wrench; wire range (3) 750 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00305	TCALK261	GE	lug-kit	CURRENT

GE TCALK261 2-lug kit with wrench, K1200/TB6

OEM part number	TCALK261	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	2-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	2 lugs + wrench; wire range (2) 2/0-500 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00309	TCALK281	GE	lug-kit	CURRENT

GE TCALK281 2-lug kit with wrench (TCAL81)

OEM part number	TCALK281	A	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCALK2812 / TCALK2811 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK2812/TCALK2811'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	S112, S114 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	2-lug kit with wrench	A	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200/TB8 600-800 A; Spectra SK1200 300-800 A	A	same as above
Kit contents	2 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00320	TCALK291	GE	lug-kit	CURRENT

GE TCALK291 2-lug kit, TK4V load end

OEM part number	TCALK291	B	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK2912 / TCALK2911 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK2912/TCALK2911'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	2-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	2 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00314	TCALK3121	GE	lug-kit	CURRENT

GE TCALK3121 3-lug kit with wrench (TCAL121)

OEM part number	TCALK3121	B	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK31214 / TCALK31212 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK31214/TCALK31212'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1000-1200 A)	B	same as above
Kit contents	3 lugs + wrench; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00318	TCALK3122	GE	lug-kit	CURRENT

GE TCALK3122 3-lug kit (TCAL122)

OEM part number	TCALK3122	**B**	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK31225 / TCALK31223 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK31225/TCALK31223'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	**B**	same as above
Description	3-lug kit with wrench	**B**	same as above
Application	accessory	**B**	same as above
Breaker compatibility	K1200 (1200 A)	**B**	same as above
Kit contents	3 lugs + wrench; wire range (3) 750 kcmil Cu-Al	**B**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**B**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00302	TCALK341	GE	lug-kit	DISCONTINUED

GE TCALK341 3-lug kit, K1200/TB6 300-400A

OEM part number	TCALK341	**A**	S114 s3 p. 3-120; oem_spec
Description	3-lug kit	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	K1200, TB6 (300-400 A)	**A**	same as above
Kit contents	3 lugs; wire range (2) 1/0-250 kcmil or (1) #4-600 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	discontinued (Not in the 11/13 or 1/19 tables)	**C**	S112, S114 inference
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00306	TCALK361	GE	lug-kit	CURRENT

GE TCALK361 3-lug kit with wrench, K1200/TB6

OEM part number	TCALK361	**A**	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit with wrench	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	**A**	same as above
Kit contents	3 lugs + wrench; wire range (2) 2/0-500 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00310	TCALK381	GE	lug-kit	CURRENT

GE TCALK381 3-lug kit with wrench (TCAL81)

OEM part number	TCALK381	A	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCALK3812 / TCALK3811 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK3812/TCALK3811'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	S112, S114 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit with wrench	A	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200/TB8 600-800 A; Spectra SK1200 300-800 A	A	same as above
Kit contents	3 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00321	TCALK391	GE	lug-kit	CURRENT

GE TCALK391 3-lug kit, TK4V load end

OEM part number	TCALK391	B	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK3912 / TCALK3911 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK3912/TCALK3911'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	3 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00315	**TC0121**	GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A	K1200 (1000-1200 A); Spectra SK1200 600-1200 A **A**	current
EDH-GEA-00324	**TC0131**	GE TC0131 copper lug, TK4V load end	TK4V - load end **A**	current
EDH-GEA-00303	**TC041**	GE TC041 copper-only lug, K1200/TB6 300-400A	K1200, TB6 (300-400 A) **A**	current
EDH-GEA-00307	**TC061**	GE TC061 copper-only lug, K1200/TB6 300-600A	K1200, TB6 (300-600 A) **A**	current
EDH-GEA-00311	**TC081A**	GE TC081A copper lug, K1200/TB8/SK1200 600-800A	K1200, TB8 (600-800 A); Spectra SK1200 300-800 A **A**	current
EDH-GEA-00323	**TC091**	GE TC091 copper lug, TK4V load end	TK4V - load end **A**	current
EDH-GEA-00312	**TCAL121**	GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al	K1200 (1000-1200 A); TKMA/THKMA 1000-1200 A **A**	current
EDH-GEA-00316	**TCAL122**	GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al	K1200 (1200 A) **B**	current
EDH-GEA-00322	**TCAL131**	GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al	TK4V - load end **B**	current
EDH-GEA-00301	**TCAL41**	GE TCAL41 lug, K1200/TB6 300-400A	K1200, TB6 (300-400 A) **A**	current
EDH-GEA-00304	**TCAL61**	GE TCAL61 lug, K1200/TB6 300-600A, (2) 2/0-500	K1200, TB6 (300-600 A) **A**	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00308	**TCAL81**	GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500	K1200 / TB8 (600-800 A); TKMA/THKMA 600-800 A; Spectra SK1200 300-800 **A**	current
EDH-GEA-00319	**TCAL91**	GE TCAL91 lug, TK4V load end, (3) 3/0-500	TK4V - load end **B**	current

EDH-GEA-00315 TC0121 GE lug CURRENT

GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A

OEM part number	TC0121	**A**	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCO121 (Printed TCO121 (letter O) in the 2012 Spectra table)	**B**	S114 alias; s3 p. 3-121; oem_spec
Description	Plated copper lug	**A**	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	K1200 (1000-1200 A); Spectra SK1200 600-1200 A	**A**	same as above
Kit contents	1 lug; wire range (4) 250-400 kcmil Cu	**A**	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-102/6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Requires	789A448G2 (EDH-GEA-00329)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00324 TC0131 GE lug CURRENT

GE TC0131 copper lug, TK4V load end

OEM part number	TC0131	**A**	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TK4V - load end	**A**	same as above
Kit contents	1 lug; wire range (4) 250-400 kcmil Cu	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Is this printed as TC0131 (zero) or TCO131 (letter O)? Is there a trailing footnote digit?*		

EDH-GEA-00303	TC041	GE	lug	CURRENT

GE TC041 copper-only lug, K1200/TB6 300-400A

OEM part number	TC041	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TC0416 / TC0414 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TC0416 (2012, fn6 'Not UL listed') / TC0414 (2019, fn4 'Not UL listed')'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. The base number TC041 is printed in the 2012 lug-cover row.)	B	same as above
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-400 A)	A	same as above
Kit contents	1 lug; wire range (1) 1/0-600 kcmil or (2) 1/0-250 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Identification features	Not UL listed (per table footnote) (Taken from the footnote digit appended to the printed part number)	B	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Torque values		

EDH-GEA-00307	TC061	GE	lug	CURRENT

GE TC061 copper-only lug, K1200/TB6 300-600A

OEM part number	TC061	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	1 lug; wire range (2) 2/0-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00311	TC081A	GE	lug	CURRENT

GE TC081A copper lug, K1200/TB8/SK1200 600-800A

OEM part number	TC081A	A	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCO81A (The 2012 Spectra table prints letter 'O' (TCO81A); the general table prints zero (TC081A).)	B	S114 alias; s3 p. 3-121; oem_spec
Description	Plated copper lug with follower and extra plating	A	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200, TB8 (600-800 A); Spectra SK1200 300-800 A	A	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu (6-102); (3) 250-500 kcmil (6-103)	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*The two tables give different wire ranges (3/0-500 vs 250-500 kcmil). Which is correct?*		

EDH-GEA-00323	TC091	GE	lug	CURRENT

GE TC091 copper lug, TK4V load end

OEM part number	TC091	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TK4V - load end	A	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00312	TCAL121	GE	lug	CURRENT

GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al

OEM part number	TCAL121	A	S112, S114 s1 p. 6-102; s3 p. 3-120; s3 TKMA 1200A table; oem_spec
Alternate / superseded numbers	TCAL1214 / TCAL1212 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL1214 (2012 fn4) / TCAL1212 (2019 fn2)'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Both footnotes read 'Suitable for 500 kcmil copper for voltage drop considerations'.)	B	S112, S114 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	S112, S114 s1 p. 6-102; s3 p. 3-120; s3 TKMA 1200A table; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200 (1000-1200 A); TKMA/THKMA 1000-1200 A	A	same as above
Kit contents	1 lug; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al (TKMA table: (4) 300-500 Al)	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Requires	789A448G2 (EDH-GEA-00329)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00316	TCAL122	GE	lug	CURRENT

GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al

OEM part number	TCAL122	B	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCAL1225 / TCAL1223 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL1225 (2012 fn5) / TCAL1223 (2019 fn3)'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Both footnotes read 'Not UL listed, requires user supplied lug cover'. The bare base number TCAL122 is not printed anywhere, so it is inferred.)	B	same as above
Description	Copper-aluminum single lug; not UL listed, requires user-supplied lug cover (footnote)	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1200 A)	B	same as above
Kit contents	1 lug; wire range (3) 750 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, lug cover part number (footnote says a user-supplied lug cover is required), Torque values		
Open question	*Confirm that the orderable base number is TCAL122 (for example on a distributor or ABB product page).*		

EDH-GEA-00322	TCAL131	GE	lug	CURRENT

GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al

OEM part number	TCAL131	B	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCAL1314 / TCAL1312 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL1314/TCAL1312'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	Copper-aluminum single lug	B	same as above
Application	accessory	B	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	1 lug; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00301	TCAL41	GE	lug	CURRENT

GE TCAL41 lug, K1200/TB6 300-400A

OEM part number	TCAL41	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-400 A)	A	same as above
Kit contents	1 lug; wire range (2) 1/0-250 kcmil or (1) #4-600 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00304	TCAL61	GE	lug	CURRENT

GE TCAL61 lug, K1200/TB6 300-600A, (2) 2/0-500

OEM part number	TCAL61	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	1 lug; wire range (2) 2/0-500 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00308	TCAL81	GE	lug	CURRENT

GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500

OEM part number	TCAL81	A	S112, S114, S115 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; s1 p. 6-11 cross-ref; oem_spec
Alternate / superseded numbers	TCAL812 / TCAL811 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL812 (2012) / TCAL811 (2019)'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Both footnotes read 'Not suitable for 100 A aluminum conductor'. TCAL81 is printed bare in the Spectra SK1200 table, TKMA tables and lug-cover row.)	B	S112, S114 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Plated extruded aluminum lug for Cu or Al cables (per the Spectra table)	A	S112, S114, S115 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; s1 p. 6-11 cross-ref; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200 / TB8 (600-800 A); TKMA/THKMA 600-800 A; Spectra SK1200 300-800 A; SK800	A	same as above
Current rating	300-800 A (SK1200 table)	A	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu-Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102/6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00319	TCAL91	GE	lug	CURRENT

GE TCAL91 lug, TK4V load end, (3) 3/0-500

OEM part number	TCAL91	B	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCAL912 / TCAL911 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL912/TCAL911'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	Copper-aluminum single lug	B	same as above
Application	accessory	B	same as above
Installation location	Load end of TK4V breaker	A	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00332	**TKMC1**	GE TKMC1 connector (back strap), TKM	TKM A	current

EDH-GEA-00332	TKMC1	GE	connector-strap	CURRENT

GE TKMC1 connector (back strap), TKM

OEM part number	TKMC1	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Connector (back strap)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TKM	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*What is the TKMC1 back strap geometry, and which end of the breaker does it fit?*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00331	**286A8066G1**	GE 286A8066G1 lug cover, TH4V/THK9V	TH4V, THK9V A	discontinued
EDH-GEA-00328	**789A448G1**	GE 789A448G1 lug cover, TKM (for TC061/TCAL61/TCAL81/TC081A)	TKM with TC061, TCAL61, TCAL81 or TC081A lugs A	current
EDH-GEA-00329	**789A448G2**	GE 789A448G2 lug cover, TKM (for TC0121/TCAL121)	TKM with TC0121 or TCAL121 lugs A	current
EDH-GEA-00330	**789A448G3**	GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain	TKM with TC041 or TCAL41 lugs C	discontinued
EDH-GEA-00333	**SKLVK**	GE SKLVK line voltage control wire kit, K1200/SK1200	K1200; Spectra SK1200 A	current
EDH-GEA-00394	**TKM11**	GE TKM11 back-connected line/load stud, K1200, TB6, TB8, 5 1/2 in	K1200, TB6, TB8 / SK1200 (1200 A) A	current
EDH-GEA-00395	**TKM12**	GE TKM12 back-connected line/load stud, K1200, TB6, TB8, 8 in	K1200, TB6, TB8 / SK1200 (1200 A) A	current

EDH-GEA-00331	286A8066G1	GE	breaker-accessory	DISCONTINUED

GE 286A8066G1 lug cover, TH4V/THK9V

OEM part number	286A8066G1	A	S114 s3 p. 3-120; oem_spec
Description	Lug cover	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TH4V, THK9V	A	same as above
Status	discontinued (Row absent from the 1/19 table)	C	S112, S114 inference
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00328	789A448G1	GE	breaker-accessory	CURRENT

GE 789A448G1 lug cover, TKM (for TC061/TCAL61/TCAL81/TC081A)

OEM part number	789A448G1	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Lug cover, TKM breaker (two per breaker)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TKM with TC061, TCAL61, TCAL81 or TC081A lugs	A	same as above
Kit contents	two required per breaker	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00329	789A448G2	GE	breaker-accessory	CURRENT

GE 789A448G2 lug cover, TKM (for TC0121/TCAL121)

OEM part number	789A448G2	A	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Lug cover, TKM breaker (two per breaker)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TKM with TC0121 or TCAL121 lugs	A	same as above
Kit contents	two required per breaker	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00330	789A448G3	GE	breaker-accessory	DISCONTINUED

GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain

OEM part number	789A448G3	C	S114 s3 p. 3-120; oem_spec
Alternate / superseded numbers	789A448G377 (as printed) [alias] (The printed string '789A448G377' probably carries footnote digit(s) 7 ('End cover supplied with 800A frame is used as lug cover'). The base number may be 789A448G3 or 789A448G37.)	C	same as above
Description	Lug cover, TKM breaker (two per breaker)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	TKM with TC041 or TCAL41 lugs	C	same as above
Status	discontinued (Row absent from the 1/19 table)	C	S112, S114 inference
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Is the true number 789A448G3 or 789A448G37?*		

EDH-GEA-00333	SKLVK	GE	breaker-accessory	CURRENT

GE SKLVK line voltage control wire kit, K1200/SK1200

OEM part number	SKLVK	A	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	SKLVK6 / SKLVK8 (as printed) (The printed number in the cited table has a footnote superscript run into it (e.g. 'SKLVK8/SKLVK6'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. The footnote is '3-pole kit'.)	B	S112, S114 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line voltage control wire kit for terminating control wire at breaker lugs; single .25 quick connect	A	S112, S114 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200; Spectra SK1200	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-102/6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00394	TKM11	GE	breaker-accessory	CURRENT

GE TKM11 back-connected line/load stud, K1200, TB6, TB8, 5 1/2 in

OEM part number	TKM11	A	S112 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6, TB8 / SK1200 (1200 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 5 1/2 in	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-101; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00395	TKM12	GE	breaker-accessory	CURRENT

GE TKM12 back-connected line/load stud, K1200, TB6, TB8, 8 in

OEM part number	TKM12	A	S112 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6, TB8 / SK1200 (1200 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 8 in	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-101; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

Breaker family Record Plus FB 100

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00370	**FCALK12**	GE FCALK12 lug kit (set of 3), Record Plus FB/FC 100, 15-20 A	Record Plus FB 100 and FC 100; 15-20 A **A**	current
EDH-GEA-00372	**FCALK13**	GE FCALK13 lug kit (set of 3), Record Plus FB/FC 100, 25-60 A	Record Plus FB 100 and FC 100; 25-60 A **A**	current
EDH-GEA-00374	**FCALK14**	GE FCALK14 lug kit (set of 3), Record Plus FB/FC 100, 70-100 A	Record Plus FB 100 and FC 100; 70-100 A **A**	current

EDH-GEA-00370	FCALK12	GE	lug-kit	CURRENT

GE FCALK12 lug kit (set of 3), Record Plus FB/FC 100, 15-20 A

OEM part number	FCALK12	A	S112 s1 p. 6-73, 6-78; oem_spec
Description	Lug kit, set of 3; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 15-20 A	A	same as above
Current rating	15-20 A	A	same as above
Kit contents	3 lugs; wire range 14-10 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00372	FCALK13	GE	lug-kit	CURRENT

GE FCALK13 lug kit (set of 3), Record Plus FB/FC 100, 25-60 A

OEM part number	FCALK13	A	S112 s1 p. 6-73, 6-78; oem_spec
Description	Lug kit, set of 3; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 25-60 A	A	same as above
Current rating	25-60 A	A	same as above
Kit contents	3 lugs; wire range 10-4 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00374	FCALK14	GE	lug-kit	CURRENT

GE FCALK14 lug kit (set of 3), Record Plus FB/FC 100, 70-100 A

OEM part number	FCALK14	A	S112 s1 p. 6-73, 6-78; oem_spec
Description	Lug kit, set of 3; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 70-100 A	A	same as above
Current rating	70-100 A	A	same as above
Kit contents	3 lugs; wire range 4-1/0 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00369	**FCAL12**	GE FCAL12 single lug, Record Plus FB/FC 100, 15-20 A	Record Plus FB 100 and FC 100; 15-20 A A	current
EDH-GEA-00371	**FCAL13**	GE FCAL13 single lug, Record Plus FB/FC 100, 25-60 A	Record Plus FB 100 and FC 100; 25-60 A A	current
EDH-GEA-00373	**FCAL14**	GE FCAL14 single lug, Record Plus FB/FC 100, 70-100 A	Record Plus FB 100 and FC 100; 70-100 A A	current

EDH-GEA-00369	FCAL12	GE	lug	CURRENT

GE FCAL12 single lug, Record Plus FB/FC 100, 15-20 A

OEM part number	FCAL12	A	S112 s1 p. 6-73, 6-78; oem_spec
Description	Single lug; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 15-20 A	A	same as above
Current rating	15-20 A	A	same as above
Kit contents	1 lug; wire range 14-10 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00371	FCAL13	GE	lug	CURRENT

GE FCAL13 single lug, Record Plus FB/FC 100, 25-60 A

OEM part number	FCAL13	A	S112 s1 p. 6-73, 6-78; oem_spec
Description	Single lug; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 25-60 A	A	same as above
Current rating	25-60 A	A	same as above
Kit contents	1 lug; wire range 10-4 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00373	FCAL14	GE	lug	CURRENT

GE FCAL14 single lug, Record Plus FB/FC 100, 70-100 A

OEM part number	FCAL14	A	S112 s1 p. 6-73, 6-78; oem_spec
Description	Single lug; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 70-100 A	A	same as above
Current rating	70-100 A	A	same as above
Kit contents	1 lug; wire range 4-1/0 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Breaker family Record Plus FE 250

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00376	**FCALK15**	GE FCALK15 lug kit (3 lugs + lug cover), Record Plus FE (150 A)	Record Plus FE 250; 150 A **A**	current
EDH-GEA-00377	**FCALK15LV**	GE FCALK15LV lug kit with control wire terminal, Record Plus FE (150 A)	Record Plus FE 250; 150 A **A**	current
EDH-GEA-00379	**FCALK16**	GE FCALK16 lug kit (3 lugs + lug cover), Record Plus FE (250 A)	Record Plus FE 250; 250 A **A**	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00380	**FCALK16LV**	GE FCALK16LV lug kit with control wire terminal, Record Plus FE (250 A)	Record Plus FE 250; 250 A **A**	current

EDH-GEA-00376 FCALK15 GE lug-kit CURRENT

GE FCALK15 lug kit (3 lugs + lug cover), Record Plus FE (150 A)

OEM part number	FCALK15	**A**	S112 s1 p. 6-81; oem_spec
Description	Lug kit: 3 lugs + lug cover	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FE 250; 150 A	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	3 lugs + lug cover; wire range #14-3/0 Cu/Al	**A**	same as above
Torque values	Lug torque 150 in-lb max	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00377 FCALK15LV GE lug-kit CURRENT

GE FCALK15LV lug kit with control wire terminal, Record Plus FE (150 A)

OEM part number	FCALK15LV	**A**	S112 s1 p. 6-81; oem_spec
Description	Lug kit with control wire terminal	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FE 250; 150 A	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	lug kit with control wire terminal; wire range #14-3/0 Cu/Al	**A**	same as above
Torque values	Lug torque 150 in-lb max	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00379 FCALK16 GE lug-kit CURRENT

GE FCALK16 lug kit (3 lugs + lug cover), Record Plus FE (250 A)

OEM part number	FCALK16	**A**	S112 s1 p. 6-81; oem_spec
Description	Lug kit: 3 lugs + lug cover	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FE 250; 250 A	**A**	same as above
Current rating	250 A	**A**	same as above
Kit contents	3 lugs + lug cover; wire range #8-250 MCM Cu / #8-350 MCM Al	**A**	same as above
Torque values	Lug torque 275 in-lb max	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00380	FCALK16LV	GE	lug-kit	CURRENT

GE FCALK16LV lug kit with control wire terminal, Record Plus FE (250 A)

OEM part number	FCALK16LV	A	S112 s1 p. 6-81; oem_spec
Description	Lug kit with control wire terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FE 250; 250 A	A	same as above
Current rating	250 A	A	same as above
Kit contents	lug kit with control wire terminal; wire range #8-250 MCM Cu / #8-350 MCM Al	A	same as above
Torque values	Lug torque 275 in-lb max	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00375	**FCAL15**	GE FCAL15 single lug, Record Plus FE 250 (150 A)	Record Plus FE 250; 150 A A	current
EDH-GEA-00378	**FCAL16**	GE FCAL16 single lug, Record Plus FE 250 (250 A)	Record Plus FE 250; 250 A A	current

EDH-GEA-00375	FCAL15	GE	lug	CURRENT

GE FCAL15 single lug, Record Plus FE 250 (150 A)

OEM part number	FCAL15	A	S112 s1 p. 6-81; oem_spec
Description	Single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FE 250; 150 A	A	same as above
Current rating	150 A	A	same as above
Kit contents	1 lug; wire range #14-3/0 Cu/Al	A	same as above
Torque values	Lug torque 150 in-lb max	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00378	FCAL16	GE	lug	CURRENT

GE FCAL16 single lug, Record Plus FE 250 (250 A)

OEM part number	FCAL16	A	S112 s1 p. 6-81; oem_spec
Description	Single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FE 250; 250 A	A	same as above
Current rating	250 A	A	same as above
Kit contents	1 lug; wire range #8-250 MCM Cu / #8-350 MCM Al	A	same as above
Torque values	Lug torque 275 in-lb max	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Breaker family Record Plus FG 600

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00381	**FCALK218H**	GE FCALK218H 2-pole lug kit, Record Plus FG 600	Record Plus FG 600, 2-pole A	current
EDH-GEA-00382	**FCALK318H**	GE FCALK318H 3-pole lug kit, Record Plus FG 600	Record Plus FG 600, 3-pole A	current

EDH-GEA-00381 **FCALK218H** GE lug-kit **CURRENT**

GE FCALK218H 2-pole lug kit, Record Plus FG 600

OEM part number	FCALK218H	A	S112 s1 p. 6-88; oem_spec
Description	2-pole lug kit for FG600, top and bottom lug types	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FG 600, 2-pole	A	same as above
Poles	2	A	same as above
Kit contents	wire range Top: wire #8-400 kcmil Cu / #6-500 kcmil Al, lug-strap #8-#4 AWG Cu/Al; Bottom: wire #2/0-600 kcmil Cu/Al, lug-strap #3 AWG-600 kcmil Cu/Al	A	same as above
Torque values	Top: wire-lug 275 lb-in (31 N-m), lug-strap 200 lb-in (23 N-m); bottom: wire-lug 375 lb-in (42 N-m), lug-strap 200 lb-in (23 N-m); strip length 7/8 in top, 1 5/8 in bottom	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		
Open question	*How many lugs are in the kit, and are the top and bottom lugs different parts?*		

EDH-GEA-00382 **FCALK318H** GE lug-kit **CURRENT**

GE FCALK318H 3-pole lug kit, Record Plus FG 600

OEM part number	FCALK318H	A	S112 s1 p. 6-88; oem_spec
Description	3-pole lug kit for FG600 (table lists FCALK218H/FCALK318H against the 3-pole row)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FG 600, 3-pole	A	same as above
Poles	3	A	same as above
Kit contents	wire range Top: wire #8-400 kcmil Cu / #6-500 kcmil Al, lug-strap #8-#4 AWG Cu/Al; Bottom: wire #2/0-600 kcmil Cu/Al, lug-strap #3 AWG-600 kcmil Cu/Al	A	same as above
Torque values	Top: wire-lug 275 lb-in (31 N-m), lug-strap 200 lb-in (23 N-m); bottom: wire-lug 375 lb-in (42 N-m), lug-strap 200 lb-in (23 N-m); strip length 7/8 in top, 1 5/8 in bottom	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00384	**FGJS3**	GE FGJS3 terminal shield fin cover, Record Plus FG	Record Plus FG 600 A	current

EDH-GEA-00384 **FGJS3** GE barrier **CURRENT**

GE FGJS3 terminal shield fin cover, Record Plus FG

OEM part number	FGJS3	A	S112 s1 p. 6-88; oem_spec
Description	Terminal shield fin cover	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FG 600	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00383	**FGH1LCK**	GE FGH1LCK lug cover kit, Record Plus FG	Record Plus FG 600 **A**	current
EDH-GEA-00385	**FGJN3**	GE FGJN3 nut plate / terminal shoe, Record Plus FG	Record Plus FG 600 **A**	current

EDH-GEA-00383 **FGH1LCK** GE breaker-accessory **CURRENT**

GE FGH1LCK lug cover kit, Record Plus FG

OEM part number	FGH1LCK	**A**	S112 s1 p. 6-88; oem_spec
Description	Lug cover kit	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FG 600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00385 **FGJN3** GE breaker-accessory **CURRENT**

GE FGJN3 nut plate / terminal shoe, Record Plus FG

OEM part number	FGJN3	**A**	S112 s1 p. 6-88; oem_spec
Description	Nut plate / terminal shoe	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FG 600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SE150

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00364	**TCAL19PD3**	GE TCAL19PD3 3-lug power distribution kit, SE1/TED	SE1, TED; max 125 A **A**	current
EDH-GEA-00336	**TCALK318**	GE TCALK318 3-lug kit, Spectra SE150	Spectra RMS SE150 **A**	current

EDH-GEA-00364 **TCAL19PD3** GE lug-kit **CURRENT**

GE TCAL19PD3 3-lug power distribution kit, SE1/TED

OEM part number	TCAL19PD3	**A**	S112, S114 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	**A**	same as above
Application	accessory	**A**	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	**A**	S112 s1 p. 6-104; oem_spec
Breaker compatibility	SE1, TED; max 125 A	**A**	S112, S114 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	125 A max	**A**	same as above
Kit contents	3-lug power distribution kit; wire range (2) 4-14 or (1) 2/0-4 Cu only	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SE150, E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00336	TCALK318	GE	lug-kit	CURRENT

GE TCALK318 3-lug kit, Spectra SE150

OEM part number	TCALK318	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Current rating	15-150 A	A	same as above
Kit contents	3 lugs; wire range (1) #12-3/0 Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00354	**TC018**	GE TC018 (TCO18) plated copper lug, SE150	Spectra RMS SE150 A	current
EDH-GEA-00335	**TCAL18**	GE TCAL18 lug, Spectra SE150, (1) #12-3/0	Spectra RMS SE150 A	current
EDH-GEA-00360	**TCAL18LV**	GE TCAL18LV lug with control-voltage quick connect, SE150	Spectra RMS SE150 A	current
EDH-GEA-00363	**TCAL19PD1**	GE TCAL19PD1 power distribution lug, SE1/TED 125A	SE1, TED; max 125 A A	current

EDH-GEA-00354	TC018	GE	lug	CURRENT

GE TC018 (TCO18) plated copper lug, SE150

OEM part number	TC018	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCO18 (2012 prints TCO18 (letter O); 2019 prints TC018)	B	S114 alias; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Current rating	15-150 A	A	same as above
Kit contents	1 lug; wire range (1) #12-3/0 Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00335	TCAL18	GE	lug	CURRENT

GE TCAL18 lug, Spectra SE150, (1) #12-3/0

OEM part number	TCAL18	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug for terminating copper or aluminum cables	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Current rating	15-150 A	A	same as above
Kit contents	1 lug; wire range (1) #12-3/0 Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00360	TCAL18LV	GE	lug	CURRENT

GE TCAL18LV lug with control-voltage quick connect, SE150

OEM part number	TCAL18LV	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Line voltage control wire kit: single lug with .25 quick connect for control voltage	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Current rating	15-150 A	A	same as above
Kit contents	1 lug with .25 in quick-connect tab; wire range (1) #12-3/0 Cu or Al	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00363	TCAL19PD1	GE	lug	CURRENT

GE TCAL19PD1 power distribution lug, SE1/TED 125A

OEM part number	TCAL19PD1	A	S112, S114 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S112 s1 p. 6-104; oem_spec
Breaker compatibility	SE1, TED; max 125 A	A	S112, S114 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	125 A max	A	same as above
Kit contents	1 power distribution lug; wire range (2) 4-14 or (1) 2/0-4 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SE150, E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00347	**SE3LCK**	GE SE3LCK lug cover kit, SE150 line end	Spectra RMS SE150 A	current
EDH-GEA-00348	**SE3LCKL**	GE SE3LCKL lug cover kit, SE150 (modified for SEFR1 handle)	Spectra RMS SE150 with SEFR1 handle A	current

EDH-GEA-00347	SE3LCK	GE	breaker-accessory	CURRENT

GE SE3LCK lug cover kit, SE150 line end

OEM part number	SE3LCK	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Three lug covers for upper (line) end	A	same as above
Application	accessory	A	same as above
Installation location	Upper (line) end	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Kit contents	3 lug covers	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00348	SE3LCKL	GE	breaker-accessory	CURRENT

GE SE3LCKL lug cover kit, SE150 (modified for SEFR1 handle)

OEM part number	SE3LCKL	A	S112 s1 p. 6-103; oem_spec
Description	SE150 lug cover kit (modified for SEFR1 handle)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150 with SEFR1 handle	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SF250

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00366	**TCAL28PD3**	GE TCAL28PD3 3-lug power distribution kit, SF	SF; max 250 A A	current
EDH-GEA-00338	**TCALK329**	GE TCALK329 3-lug kit, Spectra SF250	Spectra RMS SF250 A	current

EDH-GEA-00366	TCAL28PD3	GE	lug-kit	CURRENT

GE TCAL28PD3 3-lug power distribution kit, SF

OEM part number	TCAL28PD3	A	S112, S114 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S112 s1 p. 6-104; oem_spec
Breaker compatibility	SF; max 250 A	A	S112, S114 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	250 A max	A	same as above
Kit contents	3-lug power distribution kit; wire range (6) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00338	TCALK329	GE	lug-kit	CURRENT

GE TCALK329 3-lug kit, Spectra SF250

OEM part number	TCALK329	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	3 lugs; wire range (1) #8-350 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00365	**TCAL28PD1**	GE TCAL28PD1 power distribution lug, SF 250A	SF; max 250 A A	current
EDH-GEA-00337	**TCAL29**	GE TCAL29 lug, Spectra SF250, (1) #8-350 kcmil	Spectra RMS SF250 A	current
EDH-GEA-00361	**TCAL29LV**	GE TCAL29LV lug with control-voltage quick connect, SF250	Spectra RMS SF250 A	current
EDH-GEA-00355	**TCO29**	GE TCO29 plated copper lug, SF250	Spectra RMS SF250 A	current

EDH-GEA-00365	TCAL28PD1	GE	lug	CURRENT

GE TCAL28PD1 power distribution lug, SF 250A

OEM part number	TCAL28PD1	A	S112, S114 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S112 s1 p. 6-104; oem_spec
Breaker compatibility	SF; max 250 A	A	S112, S114 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	250 A max	A	same as above
Kit contents	1 power distribution lug; wire range (6) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00337	TCAL29	GE	lug	CURRENT

GE TCAL29 lug, Spectra SF250, (1) #8-350 kcmil

OEM part number	TCAL29	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	1 lug; wire range (1) #8-350 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00361	TCAL29LV	GE	lug	CURRENT

GE TCAL29LV lug with control-voltage quick connect, SF250

OEM part number	TCAL29LV	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Line voltage control wire kit: single lug with .25 quick connect for control voltage	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	1 lug with .25 in quick-connect tab; wire range (1) #8-350 kcmil Cu or Al	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00355	TCO29	GE	lug	CURRENT

GE TCO29 plated copper lug, SF250

OEM part number	TCO29	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	1 lug; wire range (1) #8-350 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00349	**SF3LCK**	GE SF3LCK lug cover kit, SF250 line end	Spectra RMS SF250 A	current

EDH-GEA-00349	SF3LCK	GE	breaker-accessory	CURRENT

GE SF3LCK lug cover kit, SF250 line end

OEM part number	SF3LCK	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Three lug covers for upper (line) end	A	same as above
Application	accessory	A	same as above
Installation location	Upper (line) end	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Kit contents	3 lug covers	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SG600

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00368	**TCAL40PD3**	GE TCAL40PD3 3-lug power distribution kit, SG	SG; max 400 A A	current
EDH-GEA-00339	**TCLK265**	GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)	Spectra RMS SG600/SG400, 2-pole (SGD/SGH/SGL/SGP) A	current
EDH-GEA-00340	**TCLK365**	GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)	Spectra RMS SG600/SG400, 3-pole A	current
EDH-GEA-00356	**TCOK265**	GE TCOK265 2-pole copper lug kit, SG600	Spectra RMS SG600 A	current
EDH-GEA-00357	**TCOK365**	GE TCOK365 3-pole copper lug kit, SG600	Spectra RMS SG600 A	current

EDH-GEA-00368	TCAL40PD3	GE	lug-kit	CURRENT

GE TCAL40PD3 3-lug power distribution kit, SG

OEM part number	TCAL40PD3	A	S112, S114 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S112 s1 p. 6-104; oem_spec
Breaker compatibility	SG; max 400 A	A	S112, S114 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	400 A max	A	same as above
Kit contents	3-lug power distribution kit; wire range (12) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00339	TCLK265	GE	lug-kit	CURRENT

GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)

OEM part number	TCLK265	A	S112, S114 s1 p. 6-103; s3 p. 3-121; s1 p. 6-48; oem_spec
Alternate / superseded numbers	TCLK2652 / TCLK2651 (as printed) (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCLK2652'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	S112, S114 alias; s1 p. 6-103; s3 p. 3-121; oem_spec
Description	2-pole lug kit with lug cover for line or load end. Footnote: 'Order one kit for either line or load end; two kits required for both' (s1 p. 6-48). The 6-103 entry also says 'With lug cover for line or load end'.	A	S112, S114 s1 p. 6-103; s3 p. 3-121; s1 p. 6-48; oem_spec
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600/SG400, 2-pole (SGD/SGH/SGL/SGP)	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	lugs for one end of a 2-pole breaker, plus lug cover; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00340	TCLK365	GE	lug-kit	CURRENT

GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)

OEM part number	TCLK365	A	S112, S114 s1 p. 6-103; s3 p. 3-121; s1 p. 6-48; oem_spec
Alternate / superseded numbers	TCLK3652 / TCLK3653 / TCLK3654 (as printed) [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCLK3652/TCLK3653/TCLK3654'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-pole lug kit with lug cover for line or load end. Footnote: 'Order one kit for either line or load end; two kits required for both' (s1 p. 6-48). The 6-103 entry also says 'With lug cover for line or load end'.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600/SG400, 3-pole	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	lugs for one end of a 3-pole breaker, plus lug cover; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00356	TCOK265	GE	lug-kit	CURRENT

GE TCOK265 2-pole copper lug kit, SG600

OEM part number	TCOK265	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper 2-pole lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	2-pole kit; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00357	TCOK365	GE	lug-kit	CURRENT

GE TCOK365 3-pole copper lug kit, SG600

OEM part number	TCOK365	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper 3-pole lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	3-pole kit; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00367	**TCAL40PD1**	GE TCAL40PD1 power distribution lug, SG 400A	SG; max 400 A A	current

EDH-GEA-00367	TCAL40PD1	GE	lug	CURRENT

GE TCAL40PD1 power distribution lug, SG 400A

OEM part number	TCAL40PD1	A	S112, S114 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S112 s1 p. 6-104; oem_spec
Breaker compatibility	SG; max 400 A	A	S112, S114 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	400 A max	A	same as above
Kit contents	1 power distribution lug; wire range (12) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00351	**SG1BCK**	GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)	Spectra RMS SG600 **A**	current
EDH-GEA-00350	**SG1LCK**	GE SG1LCK 3-pole lug cover, SG600	Spectra RMS SG600 **A**	current
EDH-GEA-00392	**SGBCS1**	GE SGBCS1 back-connected line/load stud, SG600, 2 13/16 in (short)	SG600 (600 A) **A**	current
EDH-GEA-00393	**SGBCS2**	GE SGBCS2 back-connected line/load stud, SG600, 6 1/16 in (long)	SG600 (600 A) **A**	current
EDH-GEA-00362	**SGLVK**	GE SGLVK line voltage control wire kit, SG600	Spectra RMS SG600 **A**	current

EDH-GEA-00351 — SG1BCK — GE — breaker-accessory — CURRENT

GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)

OEM part number	SG1BCK	**A**	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	SG1BCK4 (as printed 2019) [alias] (Footnote 4 'Required for line end bus connection' is appended in the 2019 extract. The 2012 edition prints SG1BCK.)	**B**	same as above
Description	3-pole lug cover for upper (line) or lower (load) end; required for line end bus connection	**A**	same as above
Application	accessory	**A**	same as above
Installation location	Line or load end; required at line end for bus connection	**A**	same as above
Breaker compatibility	Spectra RMS SG600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00350 — SG1LCK — GE — breaker-accessory — CURRENT

GE SG1LCK 3-pole lug cover, SG600

OEM part number	SG1LCK	**A**	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Replacement 3-pole lug cover for upper (line) or lower (load) end	**A**	same as above
Application	accessory	**A**	same as above
Installation location	Line or load end	**A**	same as above
Breaker compatibility	Spectra RMS SG600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00392 — SGBCS1 — GE — breaker-accessory — CURRENT

GE SGBCS1 back-connected line/load stud, SG600, 2 13/16 in (short)

OEM part number	SGBCS1	**A**	S112 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	SG600 (600 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 2 13/16 in (short)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-101; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00393	SGBCS2	GE	breaker-accessory	CURRENT

GE SGBCS2 back-connected line/load stud, SG600, 6 1/16 in (long)

OEM part number	SGBCS2	A	S112 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SG600 (600 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 6 1/16 in (long)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-101; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00362	SGLVK	GE	breaker-accessory	CURRENT

GE SGLVK line voltage control wire kit, SG600

OEM part number	SGLVK	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Line voltage control wire kit for terminating control wire at breaker lugs; single .25 quick connect	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SK1200

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00342	**TCALK2124**	GE TCALK2124 2-lug kit with wrench (TCAL124)	Spectra RMS SK1200 A	current
EDH-GEA-00345	**TCALK2125**	GE TCALK2125 2-lug kit with wrench (TCAL125)	Spectra RMS SK1200 A	current
EDH-GEA-00343	**TCALK3124**	GE TCALK3124 3-lug kit with wrench (TCAL124)	Spectra RMS SK1200 A	current
EDH-GEA-00346	**TCALK3125**	GE TCALK3125 3-lug kit with wrench (TCAL125)	Spectra RMS SK1200 A	current

EDH-GEA-00342	TCALK2124	GE	lug-kit	CURRENT

GE TCALK2124 2-lug kit with wrench (TCAL124)

OEM part number	TCALK2124	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	2-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	Cu 275-1200 A / Al 225-1100 A	A	same as above
Kit contents	2 lugs + wrench; wire range (3) 350-750 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00345	TCALK2125	GE	lug-kit	CURRENT

GE TCALK2125 2-lug kit with wrench (TCAL125)

OEM part number	TCALK2125	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	2-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	2 lugs + wrench; wire range (4) 250-500 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00343	TCALK3124	GE	lug-kit	CURRENT

GE TCALK3124 3-lug kit with wrench (TCAL124)

OEM part number	TCALK3124	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	Cu 275-1200 A / Al 225-1100 A	A	same as above
Kit contents	3 lugs + wrench; wire range (3) 350-750 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00346	TCALK3125	GE	lug-kit	CURRENT

GE TCALK3125 3-lug kit with wrench (TCAL125)

OEM part number	TCALK3125	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	3 lugs + wrench; wire range (4) 250-500 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00341	**TCAL124**	GE TCAL124 lug, Spectra SK1200, (3) 350-750 kcmil	Spectra RMS SK1200 A	current
EDH-GEA-00344	**TCAL125**	GE TCAL125 lug, Spectra SK1200, (4) 250-500 kcmil	Spectra RMS SK1200 A	current
EDH-GEA-00358	**TCO124**	GE TCO124 plated copper lug, SK1200 (3) 350-750	Spectra RMS SK1200 A	current
EDH-GEA-00359	**TCO125**	GE TCO125 plated copper lug, SK1200 (4) 250-500	Spectra RMS SK1200 A	current

EDH-GEA-00341	TCAL124	GE	lug	CURRENT

GE TCAL124 lug, Spectra SK1200, (3) 350-750 kcmil

OEM part number	TCAL124	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	Cu 275-1200 A / Al 225-1100 A	A	same as above
Kit contents	1 lug; wire range (3) 350-750 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00344	TCAL125	GE	lug	CURRENT

GE TCAL125 lug, Spectra SK1200, (4) 250-500 kcmil

OEM part number	TCAL125	A	S112, S114, S115 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	1 lug; wire range (4) 250-500 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00358	TCO124	GE	lug	CURRENT

GE TCO124 plated copper lug, SK1200 (3) 350-750

OEM part number	TCO124	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	1 lug; wire range (3) 350-750 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00359	TCO125	GE	lug	CURRENT

GE TCO125 plated copper lug, SK1200 (4) 250-500

OEM part number	TCO125	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	1 lug; wire range (4) 250-500 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00353	**SKPSHLD**	GE SKPSHLD lug cover/arc shield, SKPA upper end	Spectra SKPA (100 kA @ 480 Vac); may be used on other SK1200 devices A	current

EDH-GEA-00353	SKPSHLD	GE	barrier	CURRENT

GE SKPSHLD lug cover/arc shield, SKPA upper end

OEM part number	SKPSHLD	A	S112 s1 p. 6-103 fn 3; oem_spec
Description	Longer lug cover/arc shield for the upper end of the 100 kA 480 Vac SKPA; replacement part number; may be used on other SK1200 devices	A	same as above
Application	accessory	A	same as above
Installation location	Upper (line) end	A	same as above
Breaker compatibility	Spectra SKPA (100 kA @ 480 Vac); may be used on other SK1200 devices	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00352	**SK1LCK**	GE SK1LCK lug cover, SK1200	Spectra RMS SK1200 A	current

EDH-GEA-00352	SK1LCK	GE	breaker-accessory	CURRENT

GE SK1LCK lug cover, SK1200

OEM part number	SK1LCK	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	SK1LCK3 (as printed 2019) (Footnote 3 is appended)	B	S112 alias; s1 p. 6-103; oem_spec
Description	Lug cover for upper (line) or lower (load) end. SKPA (100 kA, 480 Vac) uses a longer lug cover/arc shield on the upper end (SKPSHLD).	A	S112, S114 s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S112 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family TQD / THQD (Q-Line 225A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00282	**TCALK325**	GE TCALK325 3-lug kit, TQD, (1) #4-300 kcmil Cu-Al	TQD **A**	current

EDH-GEA-00282 **TCALK325** GE lug-kit **CURRENT**

GE TCALK325 3-lug kit, TQD, (1) #4-300 kcmil Cu-Al

OEM part number	TCALK325	**A**	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit of Cu-Al lugs (TCAL25 range)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TQD	**A**	same as above
Kit contents	3 lugs; wire range (1) #4-300 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-102; oem_spec
Cross-links	Breakers: TQD / THQD (Q-Line 225A)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Does TCALK325 contain three TCAL25 lugs? The kit/single relationship is inferred from shared table rows, not stated.*		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00281	**TCAL25**	GE TCAL25 lug, TQD, (1) #4-300 kcmil Cu-Al	TQD **A**	current

EDH-GEA-00281 **TCAL25** GE lug **CURRENT**

GE TCAL25 lug, TQD, (1) #4-300 kcmil Cu-Al

OEM part number	TCAL25	**A**	S112, S114 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TQD	**A**	same as above
Kit contents	1 lug; wire range (1) #4-300 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S112 p. 6-102; oem_spec
Cross-links	Breakers: TQD / THQD (Q-Line 225A)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

6 Siemens lineage

Lineage / brand markings: Siemens, ITE, ITE Imperial, Gould, Murray

Family	Type	Status	Era	Entries	Pg
P1 Type P1 (original)	panelboard	discontinued (kits still offered)	Pre-2014/2015 (replaced by Revised P1); listed in SPEEDFAX 2007-2008	40	440
P2 Type P2 panelboard	panelboard	current	—	49	449
P3 Type P3 panelboard	panelboard	current	—	44	461
P4 Type P4 / S4 / Sentron SPP (10in deep) power panelboard	panelboard	current	—	38	466
P5 Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	panelboard	current	—	47	481
RP1 Type P1 (Revised P1)	panelboard	current	Introduced 2015 per SpeedFax p.11-7 note ('Revised P1 was introduced in 2015'); p.11-11 table header says 'Revised P1 introduced 2014'	72	499
S1/S2 Type S1 / S2 lighting panelboards	panelboard	discontinued; some kits available	—	29	532
SE Type SE panelboard	panelboard	discontinued	—	10	534
CDP6 Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	switchboard	discontinued equipment; strap kits still catalogued (Canada)	Strap kits fit switchboards manufactured since 1974	55	534
SB Type SB1 / SB2 / SB3 distribution switchboards	switchboard	current	—	69	547

6.1 P1 — Type P1 (original)

FAM-SIE-002 · panelboard · aka Original P1, P1 (pre-2014/2015) · markings: Siemens

Original Siemens P1 lighting panelboard (pre-revision), 20in wide x 5.75in deep, main lug or main/subfeed strap kits through 400A. Subfeed space standard. Catalog numbers like Revised P1 but without the T suffix, up to 42 circuits. Kits for original P1 (MBKBL1, MBKED3, MBKQR3, MLKA3 etc.) are strap-only (breakers not included) and also fit 250A-max S1/S2 panels.

Attribute	Value	Cl.	Sources
Status	discontinued (kits still offered)	A	S1 p.11-15; oem_spec
Era of manufacture	Pre-2014/2015 (replaced by Revised P1); listed in SPEEDFAX 2007-2008	A	S1, S4 s1 p.11-7, s4 p.10-17; oem_spec
Successor	Revised P1 (RP1)	A	S1 p.11-7; oem_spec
Branch breakers accepted	BL, BLH, HBL, BQD, NGB/HGB/LGB	A	S4 p.10-18; oem_spec

Breaker families associated: BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H

Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S4 SPEEDFAX 2007-2008 pp.10-17..10-22 SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22

Also fits this family (entry printed elsewhere): DFFP1A, QF3, DFFP01B, DFFPFD01, DFFPJD01, DFFPQJ01, DFFPQJ02, MBKQRFK, P1SCRWS, IMK1, EGK, ECGK, IGK, ICGK, SEBKP1P2P3V1, EWK1, EWK3, EWK1B

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00045	**MBKBC3**	Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A	3-pole BQD 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00043	**MBKBL1**	Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A	2-pole BL/BLH/HBL 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00044	**MBKBL3**	Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A	3-pole BL/BLH/HBL 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00048	**MBKED1**	Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A	2-pole ED4/HED4 50A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00049	**MBKED3**	Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A	3-pole ED4/HED4 50A-125A A	listed for Original P1 (2021); strap only, breaker kits not

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00052	**MBKFD1**	Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A	2-pole F(X)D6/HF(X)D6 70A-250A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00053	**MBKFD3**	Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A	3-pole F(X)D6/HF(X)D6 70A-250A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00054	**MBKJD1**	Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00055	**MBKJD3**	Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00046	**MBKNB1**	Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A	2-pole NGB/LGB/HGB 15A-125A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00047	**MBKNB3**	Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A	3-pole NGB/LGB/HGB 15A-125A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00050	**MBKQR1**	Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A	2-pole QR(H)2/HQR2(H) 125A-225A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00051	**MBKQR3**	Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A	3-pole QR(H)2/HQR2(H) 125A-225A **A**	listed for Original P1 (2021); strap only, breaker kits not

EDH-SIE-00045 — MBKBC3

Siemens · main-breaker-kit · **LISTED FOR ORIGINAL P1**

Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A

OEM part number	MBKBC3	**A**	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole BQD 15A-100A; breaker not included	**A**	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	**A**	same as above
Breaker compatibility	3-pole BQD 15A-100A	**A**	same as above
Current rating	100A max	**A**	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	**A**	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BQD		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00043 — MBKBL1

Siemens · main-breaker-kit · **LISTED FOR ORIGINAL P1**

Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A

OEM part number	MBKBL1	**A**	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole BL/BLH/HBL 15A-100A; breaker not included	**A**	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	**A**	same as above
Breaker compatibility	2-pole BL/BLH/HBL 15A-100A	**A**	same as above
Current rating	100A max	**A**	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	**A**	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00044	MBKBL3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A

OEM part number	MBKBL3	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole BL/BLH/HBL 15A-100A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole BL/BLH/HBL 15A-100A	A	same as above
Current rating	100A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00048	MBKED1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A

OEM part number	MBKED1	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole ED4/HED4 50A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole ED4/HED4 50A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00049	MBKED3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A

OEM part number	MBKED3	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole ED4/HED4 50A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole ED4/HED4 50A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00052	MBKFD1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A

OEM part number	MBKFD1	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole F(X)D6/HF(X)D6 70A-250A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole F(X)D6/HF(X)D6 70A-250A	A	same as above
Current rating	250A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00053	MBKFD3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A

OEM part number	MBKFD3	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole F(X)D6/HF(X)D6 70A-250A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole F(X)D6/HF(X)D6 70A-250A	A	same as above
Current rating	250A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00054	MBKJD1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A

OEM part number	MBKJD1	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A; breaker not included	A	same as above
Application	main only (not available for subfeed)	A	same as above
Breaker compatibility	2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	A	same as above
Current rating	400A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00055	MBKJD3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A

OEM part number	MBKJD3	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A; breaker not included	A	same as above
Application	main only (not available for subfeed)	A	same as above
Breaker compatibility	3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	A	same as above
Current rating	400A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00046	MBKNB1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A

OEM part number	MBKNB1	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole NGB/LGB/HGB 15A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole NGB/LGB/HGB 15A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00047	MBKNB3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A

OEM part number	MBKNB3	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole NGB/LGB/HGB 15A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole NGB/LGB/HGB 15A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00050	MBKQR1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A

OEM part number	MBKQR1	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole QR(H)2/HQR2(H) 125A-225A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole QR(H)2/HQR2(H) 125A-225A	A	same as above
Current rating	225A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00051	MBKQR3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A

OEM part number	MBKQR3	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole QR(H)2/HQR2(H) 125A-225A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole QR(H)2/HQR2(H) 125A-225A	A	same as above
Current rating	225A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00029	**4MLKA1**	Original P1 400A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00030	**4MLKA3**	Original P1 400A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00031	**4MLKC1**	Original P1 400A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00032	**4MLKC3**	Original P1 400A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00025	**MLKA1**	Original P1 250A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00026	**MLKA3**	Original P1 250A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00027	**MLKC1**	Original P1 250A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00028	**MLKC3**	Original P1 250A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)

EDH-SIE-00029	4MLKA1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 1-ph

OEM part number	4MLKA1	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00030	4MLKA3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 3-ph

OEM part number	4MLKA3	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00031	4MLKC1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 1-ph

OEM part number	4MLKC1	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00032	4MLKC3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 3-ph

OEM part number	4MLKC3	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00025	MLKA1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 1-ph

OEM part number	MLKA1	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (MLO kits available for SE panels - AL 250A only (MLKA1/MLKA3); original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00026	MLKA3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 3-ph

OEM part number	MLKA3	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (MLO kits available for SE panels - AL 250A only (MLKA1/MLKA3); original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00027	MLKC1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 1-ph

OEM part number	MLKC1	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00028	MLKC3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 3-ph

OEM part number	MLKC3	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00069	**DFFPED01**	P1 main filler for 100-125A frames ED	—	replaced by DFFPVA41A

EDH-SIE-00069	DFFPED01	Siemens	filler-plate	REPLACED BY DFFPVA41A

P1 main filler for 100-125A frames ED

OEM part number	DFFPED01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFPVA41A	A	S1 superseded_by; p.11-20; oem_spec
Description	P1 main filler for 100-125A frames ED, BL/BQD or xGB (replaced by DFFPVA41A)	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
Status	replaced by DFFPVA41A	A	S1 pp.11-13, 11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1802-61	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: P1, RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6, BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.2 P2 — Type P2 panelboard

FAM-SIE-005 · panelboard · aka P2 · markings: Siemens

Siemens bolt-on lighting/distribution panelboard with unit-space construction; branch devices installed via field strap kits (BBK*) in 3in or 6in increments; deadfront uses center strips (DFK*) and blank plates (DFFP3/DFFP6).

Attribute	Value	Cl.	Sources
Status	current	A	S1 p.11-42; oem_spec
Branch breakers accepted	BL/BQD, xGB/3VA41, ED, GB2, QR, 3VA52/61/62 via strap kits	A	S1 p.11-53; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H
Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S6 Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)
Also fits this family (entry printed elsewhere): DFFP1A, QF3, DFFPVA5363A, DFFPFD01, DFFPJD01, IMK1, EGK, ECGK, IGK, ICGK, SEBKP1P2P3V1, EWK1, EWK2, EWK3, EWK1B, EWK2B

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00117	**BNK350N**	Neutral lug kit	—	listed (2019-2021)

EDH-SIE-00117	BNK350N	Siemens	lug-kit	LISTED (2019-2021)

Neutral lug kit

OEM part number	BNK350N	A	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, narrow 350 kcmil lug with two mounting screws; used in P2/P3 neutrals	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-A-1869-61	A	same as above
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00102	**BBKB32**	P2/P3 BL/BQD 100A max twin-mount branch strap kit	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole **A**	current
EDH-SIE-00104	**BBKED32**	P2/P3 ED twin-mount branch strap kit	P2/P3 ED twin-mount branch strap kit **A**	field replacement only; use 3VA41 with BBKVA4P2P3 where poss
EDH-SIE-00106	**BBKGB32**	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit **A**	field replacement only; use BBKVA4P2P3 where possible
EDH-SIE-00105	**BBKNB32**	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit **A**	field replacement only; use BBKVA4P2P3 where possible
EDH-SIE-00110	**BBKQ1**	P2 QJ single-mount branch strap kit	P2 QJ single-mount branch strap kit **A**	discontinued - QJ not available, use new kit BBKQR1
EDH-SIE-00108	**BBKQR1**	P2 QR 225A max single-mount branch strap kit	P2 QR 225A max single-mount branch strap kit **A**	current
EDH-SIE-00103	**BBKVA4P2P3**	P2/P3 3VA41/xGB 125A max twin-mount strap kit	P2/P3 3VA41/xGB 125A max twin-mount strap kit **A**	current
EDH-SIE-00112	**BBKVA5262P2S**	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit **A**	current

EDH-SIE-00102 — BBKB32 — Siemens — branch-connector-kit — CURRENT

P2/P3 BL/BQD 100A max twin-mount branch strap kit

OEM part number	BBKB32	**A**	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole, uses 3in of unit space for 6 circuits	**A**	same as above
Application	branch (unit space) (BL/BQD kits also accept GFCI/AFCI breakers, BT twin and BSPD surge devices (s6))	**A**	same as above
Breaker compatibility	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole	**A**	same as above
Current rating	100A max	**A**	same as above
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	**A**	S1 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	**A**	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	current	**A**	same as above
Identification features	Drawing ref 11-D-2267-01	**A**	S1 p.11-53; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00104	BBKED32	Siemens	branch-connector-kit	FIELD REPLACEMENT ONLY

P2/P3 ED twin-mount branch strap kit

OEM part number	BBKED32	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 ED twin-mount branch strap kit, 6-pole, 3in of unit space for 6 circuits	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2/P3 ED twin-mount branch strap kit	A	same as above
Kit contents	breaker support, inter-phase barriers, (3) A/C connectors, (1) B connector, hardware	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	field replacement only; use 3VA41 with BBKVA4P2P3 where possible	A	same as above
Cross-links	Families: P2, P3 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00106	BBKGB32	Siemens	branch-connector-kit	FIELD REPLACEMENT ONLY

P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit

OEM part number	BBKGB32	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit, 6-pole, 3in for 6 circuits	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	A	same as above
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	field replacement only; use BBKVA4P2P3 where possible	A	same as above
Cross-links	Families: P2, P3 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00105	BBKNB32	Siemens	branch-connector-kit	FIELD REPLACEMENT ONLY

P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit

OEM part number	BBKNB32	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit, 6-pole, 3in for 6 circuits	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	A	same as above
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	field replacement only; use BBKVA4P2P3 where possible	A	same as above
Cross-links	Families: P2, P3 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00110	BBKQ1	Siemens	branch-connector-kit	DISCONTINUED - QJ NOT

P2 QJ single-mount branch strap kit

OEM part number	BBKQ1	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2 QJ single-mount branch strap kit, 6in for one 2-p or 3-p breaker	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2 QJ single-mount branch strap kit	A	same as above
Dimensions	Unit space: 6in / 1 breaker	A	same as above
Status	discontinued - QJ not available, use new kit BBKQR1	A	same as above
Cross-links	Families: P2 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00108	BBKQR1	Siemens	branch-connector-kit	CURRENT

P2 QR 225A max single-mount branch strap kit

OEM part number	BBKQR1	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2 QR 225A max single-mount branch strap kit, 6in of unit space for one 2-pole or 3-pole breaker	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2 QR 225A max single-mount branch strap kit	A	same as above
Current rating	225A max	A	same as above
Dimensions	Unit space: 6in / 1 breaker	A	same as above
Status	current	A	same as above
Identification features	Drawing ref 11-D-2636-01	A	S1 p.11-53; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00103	BBKVA4P2P3	Siemens	branch-connector-kit	CURRENT

P2/P3 3VA41/xGB 125A max twin-mount strap kit

OEM part number	BBKVA4P2P3	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 3VA41/xGB 125A max twin-mount strap kit, 3in of unit space for 6 circuits	A	same as above
Application	branch (unit space) (3VA41/xGB kits also accept BSPD surge devices (s6))	A	same as above
Breaker compatibility	P2/P3 3VA41/xGB 125A max twin-mount strap kit	A	same as above
Current rating	125A max	A	same as above
Dimensions	Unit space: 3in / 6 circuits	A	same as above
Status	current	A	same as above
Identification features	Drawing ref 13-D-2011-13	A	S1 p.11-53; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA41, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00112	BBKVA5262P2S	Siemens	branch-connector-kit	CURRENT

P2/P3 250A max 3VA52/61/62 single-mount branch strap kit

OEM part number	BBKVA5262P2S	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Alternate / superseded numbers	BBKVA5262S (Spelling in P3 data sheet; likely same kit)	A	S6 alias; oem_spec
Description	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit, 1ph or 3ph, 6in for one 2-pole or 3-pole breaker	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space)	A	same as above
Breaker compatibility	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	A	same as above
Current rating	250A max	A	same as above
Kit contents	includes 1 BBKVA5262P2HW hardware kit	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 6in / 1 breaker	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	current	A	same as above
Identification features	Drawing ref 11-D-2894-01	A	S1 p.11-53; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Requires	BBKVA5262P2HW (EDH-SIE-00113)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00116	**BNK2**	Neutral lug kit	—	listed (2019-2021)
EDH-SIE-00119	**BNKP2EX1**	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)	—	listed (2019-2021)
EDH-SIE-00118	**LPP2NB01**	Neutral lug kit	—	listed (2019-2021)

EDH-SIE-00116	BNK2	Siemens	neutral-assembly	LISTED (2019-2021)

Neutral lug kit

OEM part number	BNK2	A	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, 3-step, for P2 neutrals and others: (14x) #14-1/0 max and (14x) #14-#6 max connections, with hardware & instructions	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-A-1862	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00119	BNKP2EX1	Siemens	neutral-assembly	LISTED (2019-2021)

P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)

OEM part number	BNKP2EX1	A	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-1850-01 / 11-C-2011-01	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00118	LPP2NB01	Siemens	neutral-assembly	LISTED (2019-2021)

Neutral lug kit

OEM part number	LPP2NB01	A	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, 2-step, for P2 neutrals: (3x) #6-1/0 max and (18x) #14-#6 max, with hardware & instructions	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 15-A-1800-61	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00232	**SEBKP2V1**	SEB kit, P2 BL/BQD horizontal main	—	unknown
EDH-SIE-00233	**SEBKP2V2**	SEB kit, P2 xGB horizontal main	—	unknown
EDH-SIE-00234	**SEBKP2V3**	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main	—	unknown
EDH-SIE-00235	**SEBKP2V4**	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main	—	unknown
EDH-SIE-00236	**SEBKP2V5**	SEB kit (P2, P2 w/SEM3) ED horizontal main	—	unknown
EDH-SIE-00237	**SEBKP2V6**	SEB kit (P2, P2 w/SEM3) ED vertical main	—	unknown
EDH-SIE-00238	**SEBKP2V7**	SEB kit, P2/P3 3VA52/61/62 horizontal main	—	unknown

EDH-SIE-00232	SEBKP2V1	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2 BL/BQD horizontal main

OEM part number	SEBKP2V1	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2 BL/BQD horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2733-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00233	SEBKP2V2	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2 xGB horizontal main

OEM part number	SEBKP2V2	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2 xGB horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2734-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00234	SEBKP2V3	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main

OEM part number	SEBKP2V3	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2735-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00235	SEBKP2V4	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main

OEM part number	SEBKP2V4	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2736-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00236	SEBKP2V5	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3) ED horizontal main

OEM part number	SEBKP2V5	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3) ED horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2738-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00237	SEBKP2V6	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3) ED vertical main

OEM part number	SEBKP2V6	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3) ED vertical main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2739-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00238	SEBKP2V7	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2/P3 3VA52/61/62 horizontal main

OEM part number	SEBKP2V7	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2/P3 3VA52/61/62 horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2898-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00086	**DFK07**	P2/P3 deadfront center strip	—	listed (2021)
EDH-SIE-00087	**DFK08**	P2/P3 deadfront center strip	—	listed (2021)
EDH-SIE-00085	**DFK1**	P2/P3 deadfront center strip kit	—	listed (2021)

EDH-SIE-00086	DFK07	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip

OEM part number	DFK07	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip, 21in of unit space, with hardware	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3018-67	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00087	DFK08	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip

OEM part number	DFK08	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip, 24in of unit space, with hardware (DFK09-DFK21 = 27in-63in in 3in steps)	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3018-68	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00085	DFK1	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip kit

OEM part number	DFK1	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip kit: 7 lengths (3, 6, 9, 12, 15, 18, 21in of branch height) with mounting hardware, for 1in-pole breakers	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2273-01 (strips 11-D-3018-01 thru -07)	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00076	**DFFP3**	Deadfront filler kit	—	listed (2021)
EDH-SIE-00077	**DFFP6**	Deadfront filler kit	—	listed (2021)
EDH-SIE-00078	**DFFPVA5262P2A**	3VA52/61/62 filler for single mount P2/P3 applications	—	listed (2021)
EDH-SIE-00079	**DFFPVA5262P2B**	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)	—	listed (2021)
EDH-SIE-00084	**DFP3AP01**	P3 adapter plate	—	listed (2021)
EDH-SIE-00082	**P2QRFP01**	P2 QR deadfront filler	—	listed (2021)

EDH-SIE-00076	DFFP3	Siemens	filler-plate	LISTED (2021)

Deadfront filler kit

OEM part number	DFFP3	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	Deadfront filler kit, 3in high blank steel plates for both P2 (11-D-3014-02) and P3 (11-D-3035-02, 2.97in); hardware & instructions included	A	same as above
Material	steel	A	S1 p.11-23; oem_spec
Dimensions	3in high (P3 plate 2.97in)	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2269-01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00077	DFFP6	Siemens	filler-plate	LISTED (2021)

Deadfront filler kit

OEM part number	DFFP6	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	Deadfront filler kit, 6in high blank steel plates for both P2 (11-D-3014-01) and P3 (11-D-3035-01, 5.97in); hardware & instructions included	A	same as above
Material	steel	A	S1 p.11-23; oem_spec
Dimensions	6in high (P3 plate 5.97in)	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2270-01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00078	DFFPVA5262P2A	Siemens	filler-plate	LISTED (2021)

3VA52/61/62 filler for single mount P2/P3 applications

OEM part number	DFFPVA5262P2A	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	3VA52/61/62 filler for single mount P2/P3 applications, 1 piece	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4610-01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00079	DFFPVA5262P2B	Siemens	filler-plate	LISTED (2021)

3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)

OEM part number	DFFPVA5262P2B	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3340-01 / 11-D-4614-01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00084	DFP3AP01	Siemens	filler-plate	LISTED (2021)

P3 adapter plate

OEM part number	DFP3AP01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P3 adapter plate: fills 3in of unit space on one side of the deadfront so BL/BQD/ED/xGB/3VA41 breakers and DFFP1A fillers fit	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3033-61 (11-D-3033-01)	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00082	P2QRFP01	Siemens	filler-plate	LISTED (2021)

P2 QR deadfront filler

OEM part number	P2QRFP01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2 QR deadfront filler, plastic snap-in, vertical main position, 1 per package	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4564-01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00113	**BBKVA5262P2HW**	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	Hardware kit for branch/main horizontal single mount or vertical mount **A**	current
EDH-SIE-00120	**P2BK1**	P2 250A max horizontal main breaker bonding strap kit	—	listed (2019-2021)
EDH-SIE-00121	**P2BK2**	P2 125A max main lug bonding strap assembly	—	listed (2019-2021)
EDH-SIE-00122	**P2BK3**	P2 250-600A MLO and all vertical MB bonding kit	—	listed (2019-2021)

EDH-SIE-00113 **BBKVA5262P2HW** Siemens hardware-kit **CURRENT**

Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3

OEM part number	BBKVA5262P2HW	**A**	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	**A**	same as above
Application	branch (unit space)	**A**	same as above
Breaker compatibility	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	**A**	same as above
Status	current	**A**	same as above
Identification features	Drawing ref 11-D-2895-61	**A**	S1 p.11-53; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00120 **P2BK1** Siemens hardware-kit **LISTED (2019-2021)**

P2 250A max horizontal main breaker bonding strap kit

OEM part number	P2BK1	**A**	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 250A max horizontal main breaker bonding strap kit	**A**	same as above
Status	listed (2019-2021)	**A**	same as above
Identification features	Drawing ref 11-D-2068-01	**A**	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00121 **P2BK2** Siemens hardware-kit **LISTED (2019-2021)**

P2 125A max main lug bonding strap assembly

OEM part number	P2BK2	**A**	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 125A max main lug bonding strap assembly	**A**	same as above
Status	listed (2019-2021)	**A**	same as above
Identification features	Drawing ref 11-D-2068-02	**A**	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00122	P2BK3	Siemens	hardware-kit	LISTED (2019-2021)

P2 250-600A MLO and all vertical MB bonding kit

OEM part number	P2BK3	**A**	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 250-600A MLO and all vertical MB bonding kit	**A**	same as above
Status	listed (2019-2021)	**A**	same as above
Identification features	Drawing ref 11-D-2068-03	**A**	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00080	**BBKQRP1FK**	P2 filler kit for QR	—	listed (2021)

EDH-SIE-00080	BBKQRP1FK	Siemens	conversion-kit	LISTED (2021)

P2 filler kit for QR

OEM part number	BBKQRP1FK	**A**	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2 filler kit for QR, horizontal or vertical mount; all cover plates to change from QJ to QR, 2- and 3-pole	**A**	same as above
Status	listed (2021)	**A**	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2644-01 (contains 11-D-3282-01, 11-D-4563-01, 11-D-4564-01)	**A**	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H, QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.3 P3 — Type P3 panelboard

FAM-SIE-006 · panelboard · aka P3 · markings: Siemens

Siemens 24in wide x 7.75in deep lighting/distribution panelboard sized like a lighting panel; unit-space construction with twin-mount strap kits (BBKB32 etc.), QJ/QR twin kits and 3VA52 twin kits (max 6 large-frame breakers in unit space).

Attribute	Value	Cl.	Sources
Status	current	**A**	S1 p.11-58; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NEB / HEB, QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H

Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S6 Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)

Also fits this family (entry printed elsewhere): LNLK4X11B, LNLK6X17B, LNLK7X20B, DFFP1A, QF3, DFFPVA5363A, DFFPFD01, DFFPJD01, DFFP3, DFFP6, DFFPVA5262P2A, DFFPVA5262P2B, DFP3AP01, DFK1, DFK07, DFK08, IMK1, EGK, ECGK, IGK, ICGK, BBKB32, BBKVA4P2P3, BBKED32, BBKNB32, BBKGB32, BBKVA5262P2S, BBKVA5262P2HW, BNK350N, SEBKP1P2P3V1, SEBKP2V3, SEBKP2V4, SEBKP2V7

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00107	**BBKEB32**	P3 NEB/HEB 6-pole 3in branch breaker kit	P3 NEB/HEB 6-pole 3in branch breaker kit **A**	listed 2019 (p.11-67)
EDH-SIE-00111	**BBKQ2**	P3 branch breaker kit for 2- and 3-pole QJ twin mount	P3 branch breaker kit for 2- and 3-pole QJ twin mount **A**	listed 2019 (p.11-67); QJ superseded by QR
EDH-SIE-00109	**BBKQR2**	P3 twin breaker mounting kit for QR	P3 twin breaker mounting kit for QR **A**	current
EDH-SIE-00114	**BBKVA52P3T**	P3 strap kit	P3 strap kit **A**	current

EDH-SIE-00107	BBKEB32	Siemens	branch-connector-kit	LISTED 2019 (P.11-67)

P3 NEB/HEB 6-pole 3in branch breaker kit

OEM part number	BBKEB32	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 NEB/HEB 6-pole 3in branch breaker kit	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P3 NEB/HEB 6-pole 3in branch breaker kit	A	same as above
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	listed 2019 (p.11-67)	A	same as above
Cross-links	Families: P3 · Breakers: NEB / HEB		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00111	BBKQ2	Siemens	branch-connector-kit	LISTED 2019 (P.11-67);

P3 branch breaker kit for 2- and 3-pole QJ twin mount

OEM part number	BBKQ2	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 branch breaker kit for 2- and 3-pole QJ twin mount	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P3 branch breaker kit for 2- and 3-pole QJ twin mount	A	same as above
Kit contents	all connectors and cover plates to mount both 2- and 3-pole breakers	A	S1 p.11-67; oem_spec
Status	listed 2019 (p.11-67); QJ superseded by QR	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00109	BBKQR2	Siemens	branch-connector-kit	CURRENT

P3 twin breaker mounting kit for QR

OEM part number	BBKQR2	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 twin breaker mounting kit for QR, 1-phase/3-phase (limit 6 QR per panel)	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P3 twin breaker mounting kit for QR	A	same as above
Current rating	225A max	A	same as above
Kit contents	all connectors and cover plates to mount both 2- and 3-pole breakers	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 6in / 2 breakers	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	current	A	same as above
Cross-links	Families: P3 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00114	BBKVA52P3T	Siemens	branch-connector-kit	CURRENT

P3 strap kit

OEM part number	BBKVA52P3T	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 strap kit, twin mount 3VA52 (TMTU) branch, 1ph or 3ph, 250A max	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P3 strap kit	A	same as above
Current rating	250A max	A	same as above
Kit contents	2x BBKVA52P3HW, barrier, straps, mounting hardware	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 6in / 2 breakers	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	current	A	same as above
Cross-links	Families: P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Requires	BBKVA52P3HW (EDH-SIE-00115)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00239	**SEBKP3V1**	Service entrance barrier kit CFD, FD (P3 only)	—	unknown

EDH-SIE-00239	SEBKP3V1	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier kit CFD, FD (P3 only)

OEM part number	SEBKP3V1	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	Service entrance barrier kit CFD, FD (P3 only); field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S1 p.11-67; oem_spec
Identification features	Drawing ref (p.11-67)	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00083	**EBF1**	NEB/HEB filler plate (EB deadfront filler)	—	listed (2021)

EDH-SIE-00083	EBF1	Siemens	filler-plate	LISTED (2021)

NEB/HEB filler plate (EB deadfront filler)

OEM part number	EBF1	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	NEB/HEB filler plate (EB deadfront filler)	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4529-01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P3, P4, P5 · Breakers: NEB / HEB		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00241	**EWK2**	End wall kit with knockouts (24in W x 7.75in D) 24in	—	unknown
EDH-SIE-00244	**EWK2B**	End wall kit without knockouts (24in W x 7.75in D) 24in	—	unknown

EDH-SIE-00241	EWK2	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit with knockouts (24in W x 7.75in D) 24in

OEM part number	EWK2	A	S1 p.11-34; oem_spec
Description	End wall kit with knockouts (24in W x 7.75in D), Type 1 only	A	same as above
Dimensions	24in W x 7.75in D	A	same as above
Cross-links	Families: P3, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00244	EWK2B	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit without knockouts (24in W x 7.75in D) 24in

OEM part number	EWK2B	**A**	S1 p.11-34; oem_spec
Description	End wall kit without knockouts (24in W x 7.75in D), Type 1 only	**A**	same as above
Dimensions	24in W x 7.75in D	**A**	same as above
Cross-links	Families: P3, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00115	**BBKVA52P3HW**	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & **A**	current
EDH-SIE-00123	**P3BK1**	P3 bonding kit 800A max MLO+MB	—	listed (2019-2021)

EDH-SIE-00115	BBKVA52P3HW	Siemens	hardware-kit	CURRENT

P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws

OEM part number	BBKVA52P3HW	**A**	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	**A**	same as above
Application	branch (unit space)	**A**	same as above
Breaker compatibility	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	**A**	same as above
Kit contents	screw retainers & mounting screws	**A**	S1 p.11-67; oem_spec
Status	current	**A**	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00123	P3BK1	Siemens	hardware-kit	LISTED (2019-2021)

P3 bonding kit 800A max MLO+MB

OEM part number	P3BK1	**A**	S1 p.11-67; oem_spec
Description	P3 bonding kit 800A max MLO+MB: bonding strap and hardware	**A**	same as above
Status	listed (2019-2021)	**A**	same as above
Identification features	Drawing ref (p.11-67)	**A**	same as above
Cross-links	Families: P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00081	**BBKQRP2FK**	P3 filler kit for QR	—	listed (2021)

EDH-SIE-00081	BBKQRP2FK	Siemens	conversion-kit	LISTED (2021)

P3 filler kit for QR

OEM part number	BBKQRP2FK	**A**	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P3 filler kit for QR, dual mount horizontal; cover plates to change from QJ to QR (1-phase panel: both breakers must change)	**A**	same as above
Status	listed (2021)	**A**	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4565-01, 11-D-3283-01, 11-D-3284-01, 11-D-3288-01, 12-6812-34	**A**	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P3 · Breakers: QR2 / QRH2 / HQR2 / HQR2H, QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.4 P4 — Type P4 / S4 / Sentron SPP (10in deep) power panelboard

FAM-SIE-007 · panelboard · aka S4, SPP, Sentron SPP shallow, F1, FPP (10in) · markings: Siemens

Siemens 10in-deep distribution (power) panelboard. Branch circuit breakers mount in unit space on 'Connecting Strap Kits' (S* series, e.g. SBL, SE6, SQR, SF6, SJ1, SL6) supplied without breaker; fusible branches use F6xx kits. Same strap kit family serves Type S4 and Sentron SPP shallow panels.

Attribute	Value	Cl.	Sources
Status	current	**A**	S1 p.11-89; oem_spec
Main ampacity	Branch devices to 800A (MG1) per strap kit table	**A**	S1 p.11-96; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), NEB / HEB, QR2 / QRH2 / HQR2 / HQR2H, Sentron VL (DG, FG, JG, LG, MG, NG)
Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards
Also fits this family (entry printed elsewhere): DFFP1A, EBF1

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00149	**MG1**	MG1 connecting strap kit - VL MG (8.75in, single)	VL MG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00125	**S3VA41T**	S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)	3VA41, xGB [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00129	**S3VA52T**	S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	3VA61; 3VA52, 3VA62 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00135	**S3VA53T**	S3VA53T connecting strap kit - 3VA53 (6.25in, single)	3VA53 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00142	**S3VA54T**	S3VA54T connecting strap kit - 3VA54 (6.25in, single)	3VA54 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00136	**S3VA63T**	S3VA63T connecting strap kit - 3VA63 (6.25in, single)	3VA63 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00143	**S3VA64T**	S3VA64T connecting strap kit - 3VA64 (6.25in, single)	3VA64 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00124	**SBL**	SBL connecting strap kit - BL, BQD (3.75in, twin)	BL, BQD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00128	**SCE**	SCE connecting strap kit - CED (3.75in, twin)	CED [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00134	**SCF**	SCF connecting strap kit - Sentron CFD (5.00in, single)	Sentron CFD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00139	**SCJ**	SCJ connecting strap kit - Sentron CJD (8.75in, single)	Sentron CJD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00146	**SCL**	SCL connecting strap kit - Sentron CLD (8.75in, single)	Sentron CLD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00130	**SDGD**	SDGD connecting strap kit - VL DG (5.00in, twin)	VL DG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00127	**SE6**	SE6 connecting strap kit - ED (3.75in, twin)	ED [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00133	**SF6**	SF6 connecting strap kit - Sentron FD (5.00in, twin)	Sentron FD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00132	**SFG**	SFG connecting strap kit - VL FG (5.00in, twin)	VL FG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00126	**SGB2**	SGB2 connecting strap kit - xGB2 (3.75in, twin)	xGB2 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00138	**SJ1**	SJ1 connecting strap kit - Sentron JD (8.75in, single)	Sentron JD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00137	**SJG**	SJG connecting strap kit - VL JG (6.25in, single)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00145	**SL6**	SL6 connecting strap kit - Sentron LD (8.75in, single)	Sentron LD [s1] **A**	listed in SpeedFax 2021

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00144	**SLG**	SLG connecting strap kit - VL LG (6.25in, single)	VL LG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00131	**SQR**	SQR connecting strap kit - QR (5.00in, twin)	QR [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00141	**SSCJ**	SSCJ connecting strap kit - Sentron SCJD (8.75in, single)	Sentron SCJD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00148	**SSCL**	SSCL connecting strap kit - Sentron SCLD (8.75in, single)	Sentron SCLD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00140	**SSJ1**	SSJ1 connecting strap kit - Sentron SJD (8.75in, single)	Sentron SJD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00147	**SSL6**	SSL6 connecting strap kit - Sentron SLD (8.75in, single)	Sentron SLD [s1] **A**	listed in SpeedFax 2021

EDH-SIE-00149	**MG1**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

MG1 connecting strap kit - VL MG (8.75in, single)

OEM part number	MG1	**A**	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL MG branch breaker(s), single mount, 8.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	**A**	S1 p.11-96; oem_spec
Breaker compatibility	VL MG [s1]	**A**	S1 p.11-96 (s1); oem_spec
Current rating	800A max (table max-amp rating)	**A**	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	same as above
Status	listed in SpeedFax 2021	**A**	S1 oem_spec
Cross-links	Families: P4 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00125	**S3VA41T**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)

OEM part number	S3VA41T	**A**	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	**A**	S1 p.11-96; oem_spec
Breaker compatibility	3VA41, xGB [s1] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	**A**	S1 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	**A**	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	same as above
Status	listed in SpeedFax 2021	**A**	S1 oem_spec
Cross-links	Families: P4 · Breakers: 3VA41, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00129	S3VA52T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)

OEM part number	S3VA52T	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA61; 3VA52, 3VA62 branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	3VA61; 3VA52, 3VA62 [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	150/250A max (table max-amp rating)	A	same as above
Kit contents	see note (SB table footnote c: includes qty 1 kit S3VA52PR; SpeedFax: 'Parts are included with kit S3VA52T(D)')	A	S2 oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S1 p.11-96 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00135	S3VA53T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA53T connecting strap kit - 3VA53 (6.25in, single)

OEM part number	S3VA53T	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	3VA53 [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00142	S3VA54T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA54T connecting strap kit - 3VA54 (6.25in, single)

OEM part number	S3VA54T	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	3VA54 [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00136	S3VA63T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA63T connecting strap kit - 3VA63 (6.25in, single)

OEM part number	S3VA63T	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA63 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	3VA63 [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00143	S3VA64T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA64T connecting strap kit - 3VA64 (6.25in, single)

OEM part number	S3VA64T	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA64 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	3VA64 [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00124	SBL	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SBL connecting strap kit - BL, BQD (3.75in, twin)

OEM part number	SBL	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for BL, BQD branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	BL, BQD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	100A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: BL, BQD		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Distributor listings for SBL disagree (one calls it a padlock kit / QR frame); SpeedFax p.11-96 shows BL/BQD 100A twin 3.75in - physical verification advised*		

EDH-SIE-00128	SCE	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCE connecting strap kit - CED (3.75in, twin)

OEM part number	SCE	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	CED [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00134	SCF	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCF connecting strap kit - Sentron CFD (5.00in, single)

OEM part number	SCF	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CFD branch breaker(s), single mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron CFD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00139	SCJ	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCJ connecting strap kit - Sentron CJD (8.75in, single)

OEM part number	SCJ	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron CJD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00146	SCL	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCL connecting strap kit - Sentron CLD (8.75in, single)

OEM part number	SCL	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron CLD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00130	SDGD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SDGD connecting strap kit - VL DG (5.00in, twin)

OEM part number	SDGD	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL DG branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1) | p.11-110 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	VL DG [s1]	A	S1 p.11-96 (s1) | p.11-110 (s1); oem_spec
Current rating	150A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S1 p.11-96 (s1) | p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Same catalog number SDGD listed in both P4 (10in) and P5 (12.75in) tables - verify one kit serves both depths*		

EDH-SIE-00127	SE6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SE6 connecting strap kit - ED (3.75in, twin)

OEM part number	SE6	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for ED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	ED [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00133	SF6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SF6 connecting strap kit - Sentron FD (5.00in, twin)

OEM part number	SF6	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron FD branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron FD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00132	SFG	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SFG connecting strap kit - VL FG (5.00in, twin)

OEM part number	SFG	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL FG branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	VL FG [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00126	SGB2	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SGB2 connecting strap kit - xGB2 (3.75in, twin)

OEM part number	SGB2	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for xGB2 branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	xGB2 [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00138	SJ1	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ1 connecting strap kit - Sentron JD (8.75in, single)

OEM part number	SJ1	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron JD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00137	SJG	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG connecting strap kit - VL JG (6.25in, single)

OEM part number	SJG	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	VL JG [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00145	SL6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SL6 connecting strap kit - Sentron LD (8.75in, single)

OEM part number	SL6	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron LD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00144	SLG	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SLG connecting strap kit - VL LG (6.25in, single)

OEM part number	SLG	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL LG branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	VL LG [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00131	SQR	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SQR connecting strap kit - QR (5.00in, twin)

OEM part number	SQR	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	QR [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	225A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00141	SSCJ	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSCJ connecting strap kit - Sentron SCJD (8.75in, single)

OEM part number	SSCJ	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron SCJD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00148	SSCL	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSCL connecting strap kit - Sentron SCLD (8.75in, single)

OEM part number	SSCL	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron SCLD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00140	SSJ1	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSJ1 connecting strap kit - Sentron SJD (8.75in, single)

OEM part number	SSJ1	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron SJD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00147	SSL6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSL6 connecting strap kit - Sentron SLD (8.75in, single)

OEM part number	SSL6	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron SLD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00217	**SEBP4V1**	Service entrance barrier for (S)JD, (S)LD, MG mains	—	unknown
EDH-SIE-00218	**SEBP4V2**	Service entrance barrier for CJD, CLD	—	unknown
EDH-SIE-00219	**SEBP4V3**	Service entrance barrier for JG, LG	—	unknown

EDH-SIE-00217	SEBP4V1	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for (S)JD, (S)LD, MG mains

OEM part number	SEBP4V1	A	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)JD, (S)LD, MG mains	A	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00218	SEBP4V2	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for CJD, CLD

OEM part number	SEBP4V2	A	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for CJD, CLD	A	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00219	SEBP4V3	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for JG, LG

OEM part number	SEBP4V3	A	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for JG, LG	A	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00211	**6FPB01**	6FPB01 blank plate, 1.25in unit space	—	current
EDH-SIE-00212	**6FPB02**	6FPB02 blank plate, 2.5in unit space	—	current
EDH-SIE-00213	**6FPB03**	6FPB03 blank plate, 3.75in unit space	—	current
EDH-SIE-00214	**6FPB05**	6FPB05 blank plate, 5in unit space	—	current
EDH-SIE-00215	**6FPB10**	6FPB10 blank plate, 10in unit space	—	current

EDH-SIE-00211	6FPB01	Siemens	filler-plate	CURRENT

6FPB01 blank plate, 1.25in unit space

OEM part number	6FPB01	A	S1 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 1.25in unit height	A	S1, S2, S3 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S1, S2, S3 oem_spec
Dimensions	1.25in unit height	A	same as above
Status	current	A	S1, S2 oem_spec
Identification features	Series 6 blank plate; 2005 list price $154.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00212	6FPB02	Siemens	filler-plate	CURRENT

6FPB02 blank plate, 2.5in unit space

OEM part number	6FPB02	A	S1 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 2.5in unit height	A	S1, S2, S3 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S1, S2, S3 oem_spec
Dimensions	2.5in unit height	A	same as above
Status	current	A	S1, S2 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00213	6FPB03	Siemens	filler-plate	CURRENT

6FPB03 blank plate, 3.75in unit space

OEM part number	6FPB03	A	S1 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 3.75in unit height	A	S1, S2, S3 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S1, S2, S3 oem_spec
Dimensions	3.75in unit height	A	same as above
Status	current	A	S1, S2 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00214	6FPB05	Siemens	filler-plate	CURRENT

6FPB05 blank plate, 5in unit space

OEM part number	6FPB05	A	S1 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 5in unit height	A	S1, S2, S3 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S1, S2, S3 oem_spec
Dimensions	5in unit height	A	same as above
Status	current	A	S1, S2 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00215	6FPB10	Siemens	filler-plate	CURRENT

6FPB10 blank plate, 10in unit space

OEM part number	6FPB10	A	S1 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 10in unit height	A	S1, S2, S3 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S1, S2, S3 oem_spec
Dimensions	10in unit height	A	same as above
Status	current	A	S1, S2 oem_spec
Identification features	Series 6 blank plate; 2005 list price $239.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00205	**S3VA52PR**	3VA52/61/62 breaker provision hardware kit (twin mount)	—	current

EDH-SIE-00205	S3VA52PR	Siemens	hardware-kit	CURRENT

3VA52/61/62 breaker provision hardware kit (twin mount)

OEM part number	S3VA52PR	A	S1 s1 pp.11-96, 11-110; s2 p.11-14; oem_spec
Description	Only required when installing a 3VA52, 3VA61 or 3VA62 breaker to an existing provision in the field; parts included with kit S3VA52T/S3VA52TD	A	S1 pp.11-96, 11-110; oem_spec
Kit contents	(3) bus extensions, (3) 3VA5 nut keepers, (3) 3VA6 nut keepers and hardware	A	S2 p.11-14; oem_spec
Status	current	A	S1, S2 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00210	**SQRC**	QR cover plate for P4/P5/SPP power panels	—	unknown

EDH-SIE-00210	SQRC	Siemens	other	STATUS UNKNOWN

QR cover plate for P4/P5/SPP power panels

OEM part number	SQRC	A	S1 pp.11-96, 11-110 'Cover Plates'; oem_spec
Description	Cover plate for QR breaker; 'To replace a QJ with a QR only a new cover is needed'	A	S1 pp.11-96, 11-110; oem_spec
Application	branch (QJ to QR conversion cover)	A	S1 p.11-96; oem_spec
Cross-links	Families: P4, P5 · Breakers: QR2 / QRH2 / HQR2 / HQR2H, QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.5 P5 — Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard

FAM-SIE-008 · panelboard · aka S5, SPP deep, Sentron Deep, F2, FPP deep · markings: Siemens

Siemens 12.75in-deep distribution panelboard. Branch connecting strap kits carry a 'D' suffix (SBLBD, SE6D, SF6D, SJ1D, SMND...). SpeedFax footnote: these kits also fit Types FCI, FCII, SB1 and SB2 switchboards.

Attribute	Value	CI.	Sources
Status	current	A	S1 p.11-103; oem_spec
Main ampacity	Branch devices to 1200A (NG1D/SMND)	A	S1 p.11-110; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, NEB / HEB, QR2 / QRH2 / HQR2 / HQR2H, Sentron VL (DG, FG, JG, LG, MG, NG)

Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards

Also fits this family (entry printed elsewhere): DFFP1A, EBF1, SDGD, S3VA52PR, SQRC, 6FPB01, 6FPB02, 6FPB03, 6FPB05, 6FPB10, SEBP4V1, SEBP4V2, SEBP4V3

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00155	**6CLE2**	6CLE2 connecting strap kit - CED (3.75in, twin)	CED [s1]; CED6 [s3]; CED6 [s2] A	listed in SpeedFax 2021, 2005 price list, Siemens Canada cat
EDH-SIE-00157	**6QR2**	6QR2 connecting strap kit - QR (5.00in, twin)	QR [s1]; QR2, QR2H, HQR2, HQR2H [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00175	**MG1D**	MG1D connecting strap kit - VL MG (8.75in, single)	VL MG [s1]; NM, HM, LM, SNM, SHM, SLM [s3] A	listed in SpeedFax 2021, 2005 price list
EDH-SIE-00179	**NG1D**	NG1D connecting strap kit - VL NG (10.00in, single)	VL NG [s1]; NN, HN, LN, SNN, SHN, SLN [s3] A	listed in SpeedFax 2021, 2005 price list
EDH-SIE-00151	**S3VA41TD**	S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)	3VA41, xGB [s1]; 3VA41 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00152	**S3VA41TDHD**	S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)	3VA41, xGB [s1]; 3VA41 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00156	**S3VA52TD**	S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	3VA61; 3VA52, 3VA62 [s1]; 3VA61; 3VA52, 3VA62 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00161	**S3VA53TD**	S3VA53TD connecting strap kit - 3VA53 (6.25in, single)	3VA53 [s1]; 3VA53, 3VA63 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00168	**S3VA54TD**	S3VA54TD connecting strap kit - 3VA54 (6.25in, single)	3VA54 [s1]; 3VA54, 3VA64 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00162	**S3VA63TD**	S3VA63TD connecting strap kit - 3VA63 (6.25in, single)	3VA63 [s1] A	listed in SpeedFax 2021
EDH-SIE-00169	**S3VA64TD**	S3VA64TD connecting strap kit - 3VA64 (6.25in, single)	3VA64 [s1] A	listed in SpeedFax 2021
EDH-SIE-00150	**SBLBD**	SBLBD connecting strap kit - BL, BQD (3.75in, twin)	BL, BQD [s1]; BQD [s2]; BL, BLH, HBL, BQD [s3] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00160	**SCFD**	SCFD connecting strap kit - Sentron CFD (5.00in, single)	Sentron CFD [s1]; CFD [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00167	**SCJD**	SCJD connecting strap kit - Sentron CJD (8.75in, single)	Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; S A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00172	**SCLD**	SCLD connecting strap kit - Sentron CLD (8.75in, single)	Sentron CLD [s1]; CLD [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00154	**SE6D**	SE6D connecting strap kit - ED (3.75in, twin)	ED [s1]; ED [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00159	**SF6D**	SF6D connecting strap kit - Sentron FD (5.00in, twin)	Sentron FD [s1]; FD [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00158	**SFGD**	SFGD connecting strap kit - VL FG (5.00in, twin)	VL FG [s1] A	listed in SpeedFax 2021
EDH-SIE-00153	**SGB2D**	SGB2D connecting strap kit - xGB2 (3.75in, twin)	xGB2 [s1] A	listed in SpeedFax 2021

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00165	**SJ1D**	SJ1D connecting strap kit - Sentron JD (8.75in, single)	Sentron JD [s1]; JD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00166	**SJ2D**	SJ2D connecting strap kit - Sentron JD (8.75in, twin)	Sentron JD [s1]; JD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00164	**SJG1D**	SJG1D connecting strap kit - VL JG (6.25in, single)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00163	**SJG2D**	SJG2D connecting strap kit - VL JG (6.25in, twin)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00171	**SL6D**	SL6D connecting strap kit - Sentron LD (8.75in, single)	Sentron LD [s1]; LD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00170	**SLGD**	SLGD connecting strap kit - VL LG (6.25in, single)	VL LG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00176	**SLM1D**	SLM1D connecting strap kit - Sentron LMD (8.75in, single)	Sentron LMD [s1]; LMD [s2]; LMD6, HLMD6 [s3] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00177	**SMND**	SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)	Sentron MD, CMD; ND [s1]; MD, CMD; ND [s2]; MD6, HMD6, CMD6 [s3]; ND6, **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00174	**SSCLD**	SSCLD connecting strap kit - Sentron SCLD (8.75in, single)	Sentron SCLD [s1]; SCLD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00173	**SSL6D**	SSL6D connecting strap kit - Sentron SLD (8.75in, single)	Sentron SLD [s1]; SLD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00178	**SSMND**	SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)	Sentron SMD; SND [s1]; SMD; SND [s2]; SMD6, SHMD6, SCMD6 [s3]; SND6, S **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005

EDH-SIE-00155	**6CLE2**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

6CLE2 connecting strap kit - CED (3.75in, twin)

OEM part number	6CLE2	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	**A**	S1, S3, S2 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	CED [s1]; CED6 [s3]; CED6 [s2]	**A**	same as above
Current rating	125A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S1, S3, S2 p.11-110 | p.8-13 | p.11-15; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	S2 p.11-15; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S3, S2 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in SpeedFax 2021, 2005 price list, Siemens Canada catalogue 2025	**A**	S1, S3, S2 oem_spec
Identification features	2005 list price $845.00	**A**	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00157	6QR2	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

6QR2 connecting strap kit - QR (5.00in, twin)

OEM part number	6QR2	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Alternate / superseded numbers	6QR2CAN	**A**	S2 alias; p.11-15; oem_spec
	6QR2CCAN [alias]	**A**	same as above
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	**A**	S1, S2 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	QR [s1]; QR2, QR2H, HQR2, HQR2H [s2]	**A**	same as above
Current rating	225A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S1, S2 p.11-110 | p.11-15; oem_spec
Material	QR filler plates only: 6QR2FKCAN; copper QR kit 6QR2CCAN (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	S2 p.11-15; oem_spec
Dimensions	Unit height 5 / 5.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00175	MG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

MG1D connecting strap kit - VL MG (8.75in, single)

OEM part number	MG1D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL MG branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S1, S3 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Breaker compatibility	VL MG [s1]; NM, HM, LM, SNM, SHM, SLM [s3]	A	same as above
Current rating	800A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S1, S3 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S3 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S3 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, 2005 price list	A	S1, S3 oem_spec
Identification features	2005 list price $2938.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 list maps NM/HM/LM (VL 800A) to MG1D while SpeedFax maps VL MG to MG1D - confirm whether 'NM/HM/LM' are VL MG-frame trip variants*		

EDH-SIE-00179	NG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

NG1D connecting strap kit - VL NG (10.00in, single)

OEM part number	NG1D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL NG branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S1, S3 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Breaker compatibility	VL NG [s1]; NN, HN, LN, SNN, SHN, SLN [s3]	A	same as above
Current rating	1200A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S1, S3 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S3 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S1, S3 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, 2005 price list	A	S1, S3 oem_spec
Identification features	2005 list price $3489.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00151	S3VA41TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)

OEM part number	S3VA41TD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	3VA41, xGB [s1]; 3VA41 [s2] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA41, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00152	S3VA41TDHD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)

OEM part number	S3VA41TDHD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin, high density (six 2-pole breakers) mount, 7.50in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin, high density, Twin, high density (six 2-pole breakers)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	3VA41, xGB [s1]; 3VA41 [s2] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 7.50 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA41, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00156	S3VA52TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)

OEM part number	S3VA52TD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA61; 3VA52, 3VA62 branch breaker(s), twin mount, 5.00in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	3VA61; 3VA52, 3VA62 [s1]; 3VA61; 3VA52, 3VA62 [s2]	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	150/250A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote c: includes qty 1 kit S3VA52PR; SpeedFax: 'Parts are included with kit S3VA52T(D)')	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00161	S3VA53TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA53TD connecting strap kit - 3VA53 (6.25in, single)

OEM part number	S3VA53TD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53 branch breaker(s), single mount, 6.25in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	3VA53 [s1]; 3VA53, 3VA63 [s2]	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote d: includes qty 1 kit S3VA53PR)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00168	S3VA54TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA54TD connecting strap kit - 3VA54 (6.25in, single)

OEM part number	S3VA54TD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54 branch breaker(s), single mount, 6.25in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	3VA54 [s1]; 3VA54, 3VA64 [s2]	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote d: includes qty 1 kit S3VA53PR)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00162	S3VA63TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA63TD connecting strap kit - 3VA63 (6.25in, single)

OEM part number	S3VA63TD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA63 branch breaker(s), single mount, 6.25in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S1 p.11-110 (s1); oem_spec
Breaker compatibility	3VA63 [s1]	**A**	same as above
Current rating	400A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	**A**	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	**A**	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00169	S3VA64TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA64TD connecting strap kit - 3VA64 (6.25in, single)

OEM part number	S3VA64TD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA64 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-110 (s1); oem_spec
Breaker compatibility	3VA64 [s1]	A	same as above
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00150	SBLBD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SBLBD connecting strap kit - BL, BQD (3.75in, twin)

OEM part number	SBLBD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for BL, BQD branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	BL, BQD [s1]; BQD [s2]; BL, BLH, HBL, BQD [s3]	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	100A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S1, S3 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S3 p.8-13; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S1, S2, S3 oem_spec
Identification features	2005 list price $768.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: BL, BQD		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00160	SCFD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCFD connecting strap kit - Sentron CFD (5.00in, single)

OEM part number	SCFD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CFD branch breaker(s), single mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron CFD [s1]; CFD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00167	SCJD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCJD connecting strap kit - Sentron CJD (8.75in, single)

OEM part number	SCJD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; SB table gives SSJ1D for SJD) branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; SB table gives SSJ1D for SJD) [s1]; CJD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*P5 table pairs both CJD and SJD with SCJD; SB table pairs SJD with SSJ1D - which is correct for SJD in P5?*		

EDH-SIE-00172	SCLD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCLD connecting strap kit - Sentron CLD (8.75in, single)

OEM part number	SCLD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron CLD [s1]; CLD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00154	SE6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SE6D connecting strap kit - ED (3.75in, twin)

OEM part number	SE6D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for ED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	ED [s1]; ED [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00159	SF6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SF6D connecting strap kit - Sentron FD (5.00in, twin)

OEM part number	SF6D	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron FD branch breaker(s), twin mount, 5.00in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	Sentron FD [s1]; FD [s2]	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	250A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00158	SFGD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SFGD connecting strap kit - VL FG (5.00in, twin)

OEM part number	SFGD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL FG branch breaker(s), twin mount, 5.00in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S1 p.11-110 (s1); oem_spec
Breaker compatibility	VL FG [s1]	**A**	same as above
Current rating	250A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	**A**	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00153	SGB2D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SGB2D connecting strap kit - xGB2 (3.75in, twin)

OEM part number	SGB2D	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for xGB2 branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S1 p.11-110 (s1); oem_spec
Breaker compatibility	xGB2 [s1]	**A**	same as above
Current rating	125A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	**A**	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00165	SJ1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ1D connecting strap kit - Sentron JD (8.75in, single)

OEM part number	SJ1D	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), single mount, 8.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	Sentron JD [s1]; JD [s2]	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00166	SJ2D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ2D connecting strap kit - Sentron JD (8.75in, twin)

OEM part number	SJ2D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), twin mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron JD [s1]; JD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00164	SJG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG1D connecting strap kit - VL JG (6.25in, single)

OEM part number	SJG1D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-110 (s1); oem_spec
Breaker compatibility	VL JG [s1]	A	same as above
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00163	SJG2D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG2D connecting strap kit - VL JG (6.25in, twin)

OEM part number	SJG2D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), twin mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-110 (s1); oem_spec
Breaker compatibility	VL JG [s1]	A	same as above
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00171	SL6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SL6D connecting strap kit - Sentron LD (8.75in, single)

OEM part number	SL6D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron LD [s1]; LD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00170	SLGD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SLGD connecting strap kit - VL LG (6.25in, single)

OEM part number	SLGD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL LG branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-110 (s1); oem_spec
Breaker compatibility	VL LG [s1]	A	same as above
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00176	SLM1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SLM1D connecting strap kit - Sentron LMD (8.75in, single)

OEM part number	SLM1D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LMD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron LMD [s1]; LMD [s2]; LMD6, HLMD6 [s3]	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	800A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S1, S3 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S3 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S1, S2, S3 oem_spec
Identification features	2005 list price $2938.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00177	SMND	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)

OEM part number	SMND	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron MD, CMD; ND branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for ND)in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron MD, CMD; ND [s1]; MD, CMD; ND [s2]; MD6, HMD6, CMD6 [s3]; ND6, HND6, CND6 [s3]	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	800/1200A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S1, S3 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S3 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S1, S2, S3 oem_spec
Identification features	2005 list price $3489.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00174	SSCLD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSCLD connecting strap kit - Sentron SCLD (8.75in, single)

OEM part number	SSCLD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron SCLD [s1]; SCLD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00173	SSL6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSL6D connecting strap kit - Sentron SLD (8.75in, single)

OEM part number	SSL6D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron SLD [s1]; SLD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00178	SSMND	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)

OEM part number	SSMND	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SMD; SND branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for SND)in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron SMD; SND [s1]; SMD; SND [s2]; SMD6, SHMD6, SCMD6 [s3]; SND6, SHND6, SCND6 [s3]	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	800/1200A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S1, S3 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S3 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S1, S2, S3 oem_spec
Identification features	2005 list price $3489.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00220	**SEBP5V1**	Service entrance barrier for (S)MD, (S)ND without shield	—	unknown
EDH-SIE-00221	**SEBP5V2**	Service entrance barrier for (S)MD, (S)ND with shield	—	unknown
EDH-SIE-00222	**SEBP5V3**	Service entrance barrier for Vacu-Break switches	—	unknown
EDH-SIE-00223	**SEBP5V4**	Service entrance barrier for HCP switches	—	unknown

EDH-SIE-00220 **SEBP5V1** Siemens barrier **STATUS UNKNOWN**

Service entrance barrier for (S)MD, (S)ND without shield

OEM part number	SEBP5V1	**A**	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)MD, (S)ND without shield	**A**	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00221 **SEBP5V2** Siemens barrier **STATUS UNKNOWN**

Service entrance barrier for (S)MD, (S)ND with shield

OEM part number	SEBP5V2	**A**	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)MD, (S)ND with shield	**A**	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00222 **SEBP5V3** Siemens barrier **STATUS UNKNOWN**

Service entrance barrier for Vacu-Break switches

OEM part number	SEBP5V3	**A**	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for Vacu-Break switches	**A**	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00223 **SEBP5V4** Siemens barrier **STATUS UNKNOWN**

Service entrance barrier for HCP switches

OEM part number	SEBP5V4	**A**	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for HCP switches	**A**	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.6 RP1 — Type P1 (Revised P1)

FAM-SIE-001 · panelboard · aka Revised P1, New Revised P1, NextGen P1, P1...T, P1...N · markings: Siemens

Siemens 20in wide x 5.75in deep bolt-on lighting/appliance panelboard, 250A or 400A bus, split (cross-bussed) neutral at both ends of an open-ended bus. Field-convertible mains: main lug kits (MLK*) or horizontal main/subfeed strap kits (MBK*) through 250A, vertical 400A main. Catalog numbers end in T (feed-thru/subfeed space) or N (non-feed-thru, 6in shorter box). Revised P1 kits are not interchangeable with original P1, S1/S2 or SE panels.

Attribute	Value	Cl.	Sources
Status	current	A	S1 p.11-11; oem_spec
Era of manufacture	Introduced 2015 per SpeedFax p.11-7 note ('Revised P1 was introduced in 2015'); p.11-11 table header says 'Revised P1 introduced 2014' (OEM document is internally inconsistent (2014 vs 2015))	A	S1 pp.11-7, 11-11; oem_spec
Voltage rating	240V AC max for P1A/P1X; 480Y/277V for P1E/P18; 600Y/347V limited (factory only)	A	S1 pp.11-7, 11-24; oem_spec
Main ampacity	250A or 400A bus; 400A max mains	A	same as above
Branch breakers accepted	BL/BLH/HBL, BQD, BT twin (P1A/P1X/P1E); xGB (NGB/HGB/LGB) and 3VA41 (P18 interiors only)	A	S1 pp.11-7, 11-16; oem_spec
branch_connection_limit	All configurations allow 125A per connection max (250A per pair); 18-circuit 250A Revised P1 limited to 100A per connection (200A per pair) with BL/BQD/xGB across from each other	A	S1 p.11-12 footnote; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), QR2 / QRH2 / HQR2 / HQR2H
Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S5 SIE_CS_P1 / Siemens SIOS 109799956 Type P1 Panelboard data sheet (SIE_CS_P1); S8 SI-LP-1633 NextGen P1 panelboard brochure (Siemens Canada)
Also fits this family (entry printed elsewhere): DFFPED01

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00003	**MBKED1A**	Revised P1 main/subfeed strap kit, ED, 1-ph, 125A	ED (125A max) A	current (2021)
EDH-SIE-00004	**MBKED3A**	Revised P1 main/subfeed strap kit, ED, 3-ph, 125A	ED (125A max) A	current (2021)
EDH-SIE-00007	**MBKFD1A**	Revised P1 main/subfeed strap kit, FD, 1-ph, 250A	FD (250A max) A	current (2021)
EDH-SIE-00008	**MBKFD3A**	Revised P1 main/subfeed strap kit, FD, 3-ph, 250A	FD (250A max) A	current (2021)
EDH-SIE-00012	**MBKJD3B**	RP1 400A JD strap kit 1ph/3ph, 2 fillers	JD frame (JXD2/JXD6/JD6/HJ(X)D6) 400A B	current (2021)
EDH-SIE-00005	**MBKQR1A**	Revised P1 main/subfeed strap kit, QR, 1-ph, 225A	QR (225A max) A	current (2021)
EDH-SIE-00006	**MBKQR3A**	Revised P1 main/subfeed strap kit, QR, 3-ph, 225A	QR (225A max) A	current (2021)
EDH-SIE-00001	**MBKVA41A**	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter) A	current (2021)
EDH-SIE-00002	**MBKVA41B**	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter) A	current (2021)
EDH-SIE-00009	**MBKVA5262A**	Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A	3VA52/61/62 (250A max) A	current (2021)
EDH-SIE-00010	**MBKVA5262B**	Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A	3VA52/61/62 (250A max) A	current (2021)
EDH-SIE-00011	**MBKVA5363A**	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph	3VA53/3VA63 A	current (2021)

EDH-SIE-00003	MBKED1A	Siemens	main-breaker-kit	CURRENT (2021)
Revised P1 main/subfeed strap kit, ED, 1-ph, 125A				
OEM part number	MBKED1A	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec	
Description	Revised P1 1-phase main/subfeed strap kit for ED (125A max); breaker not included	**A**	same as above	
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S1 pp.11-13, 11-14; oem_spec	
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S1 pp.11-8, 11-9; oem_spec	
Breaker compatibility	ED (125A max)	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec	
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	**B**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference	
Current rating	125A max	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec	
Kit contents	Includes DF filler DFFPVA41A (replacing DFFPED01)	**A**	same as above	
Status	current (2021)	**A**	same as above	
Cross-links	Families: RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6			
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values			
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*			

EDH-SIE-00004	MBKED3A	Siemens	main-breaker-kit	CURRENT (2021)
Revised P1 main/subfeed strap kit, ED, 3-ph, 125A				
OEM part number	MBKED3A	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec	
Description	Revised P1 3-phase main/subfeed strap kit for ED (125A max); breaker not included	**A**	same as above	
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S1 pp.11-13, 11-14; oem_spec	
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S1 pp.11-8, 11-9; oem_spec	
Breaker compatibility	ED (125A max)	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec	
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	**B**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference	
Current rating	125A max	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec	
Kit contents	Includes DF filler DFFPVA41A (replacing DFFPED01)	**A**	same as above	
Status	current (2021)	**A**	same as above	
Replacement / successor	Factory kits with breaker: MBKED3100A, MBKED3125A (3-pole ED4) (Same mounting family, sold with breaker installed; listed for reference)	**A**	S1 p.11-14; oem_spec	
Cross-links	Families: RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6			
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values			
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*			

EDH-SIE-00007	MBKFD1A	Siemens	main-breaker-kit	CURRENT (2021)
Revised P1 main/subfeed strap kit, FD, 1-ph, 250A				
OEM part number	MBKFD1A	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for FD (250A max); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	FD (250A max)	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	**B**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPFD01	**A**	same as above
Status	current (2021)	**A**	same as above
Cross-links	Families: RP1 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00008	MBKFD3A	Siemens	main-breaker-kit	CURRENT (2021)
Revised P1 main/subfeed strap kit, FD, 3-ph, 250A				
OEM part number	MBKFD3A	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for FD (250A max); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	FD (250A max)	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	**B**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPFD01	**A**	same as above
Status	current (2021)	**A**	same as above
Replacement / successor	Kits with breaker: MBKFD3150A, MBKFD3175A, MBKFD3200A, MBKFD3225A, MBKFD3250A (3P FXD6) (Same mounting family, sold with breaker installed; listed for reference)	**A**	S1 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00012	MBKJD3B	Siemens	main-breaker-kit	CURRENT (2021)

RP1 400A JD strap kit 1ph/3ph, 2 fillers

OEM part number	MBKJD3B	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKJD1A [supersedes]	A	same as above
	MBKJD3A [supersedes]	A	same as above
Description	RP1 400A JD strap kit 1ph/3ph, 2 fillers; breaker not included	A	same as above
Application	main only (400A kit is main only, not allowed for subfeed)	A	S1, S8 s1 p.11-13; s8 kit table footnote 1; oem_spec
Installation location	Vertical 400A main position	A	S1 p.11-24 footnote b (400A main breaker is vertical mounted); oem_spec
Breaker compatibility	JD frame (JXD2/JXD6/JD6/HJ(X)D6) 400A (Table says 'JD'; frame variants from original P1 MBKJD1/3 row)	B	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	400A max	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	includes DFFPJD02 (large) and DFFPJD01 (small) filler	A	same as above
Status	current (2021)	A	same as above
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00005	MBKQR1A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, QR, 1-ph, 225A

OEM part number	MBKQR1A	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for QR (225A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	QR (225A max)	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	225A max	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler MBKQRFK	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Kits with breaker: MBKQR1125A..MBKQR1225A (2P QR2 125-225A, 10kA); MBKQR1125HA..MBKQR1225HA (2P HQR2, 65kA) (Same mounting family, sold with breaker installed; listed for reference)	A	S1 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00006	MBKQR3A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, QR, 3-ph, 225A

OEM part number	MBKQR3A	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for QR (225A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	QR (225A max)	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	225A max	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler MBKQRFK	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Kits with breaker: MBKQR3125A..MBKQR3225A (3P QR2); MBKQR3125HA..MBKQR3225HA (3P HQR2) (Same mounting family, sold with breaker installed; listed for reference)	A	S1 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00001	MBKVA41A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A

OEM part number	MBKVA41A	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKBL1A [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
	MBKBC1NBA [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
Description	Revised P1 1-phase main/subfeed strap kit for BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter)	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	**B**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes deadfront filler DFFPVA41A	**A**	same as above
Status	current (2021)	**A**	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00002	MBKVA41B	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A

OEM part number	MBKVA41B	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKBL3A [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
	MBKBC3NBA [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
Description	Revised P1 3-phase main/subfeed strap kit for BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter)	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	**B**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes deadfront filler DFFPVA41A	**A**	same as above
Status	current (2021)	**A**	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00009	MBKVA5262A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A

OEM part number	MBKVA5262A	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for 3VA52/61/62 (250A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	3VA52/61/62 (250A max)	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA5262A	A	same as above
Status	current (2021)	A	same as above
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00010	MBKVA5262B	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A

OEM part number	MBKVA5262B	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for 3VA52/61/62 (250A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	3VA52/61/62 (250A max)	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA5262A	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Kits with breaker: MBKVAM3150A/3200A/3225A/3250A (3VA52 MFAS 35kA), MBKVAH3200A/3250A (3VA52 HFAS 65kA) (Same mounting family, sold with breaker installed; listed for reference)	A	S1 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00011	MBKVA5363A	Siemens	main-breaker-kit	CURRENT (2021)

RP1 400A 3VA53/63 main strap kit, 1ph or 3ph

OEM part number	MBKVA5363A	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph; breaker not included	A	same as above
Application	main only (400A kit is main only, not allowed for subfeed)	A	S1, S8 s1 p.11-13; s8 kit table footnote 1; oem_spec
Installation location	Vertical 400A main position	A	S1 p.11-24 footnote b (400A main breaker is vertical mounted); oem_spec
Breaker compatibility	3VA53/3VA63	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Current rating	400A max	A	same as above
Kit contents	includes MBKVA5363JD (large) filler; 'These new 400A kits include both small and large filler plates'	A	same as above
Status	current (2021)	A	same as above
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00019	**4MLKA1A**	Revised P1 400A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00023	**4MLKA1B**	Revised P1 400A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00020	**4MLKA3A**	Revised P1 400A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00024	**4MLKA3B**	Revised P1 400A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00021	**4MLKC1A**	Revised P1 400A CU main/feed-thru lug kit, 1-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00022	**4MLKC3A**	Revised P1 400A CU main/feed-thru lug kit, 3-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00015	**MLKA1A**	Revised P1 250A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00016	**MLKA3A**	Revised P1 250A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00017	**MLKC1A**	Revised P1 250A CU main/feed-thru lug kit, 1-ph	n/a (lug kit) **A**	current (2021)
EDH-SIE-00018	**MLKC3A**	Revised P1 250A CU main/feed-thru lug kit, 3-ph	n/a (lug kit) **A**	current (2021)

EDH-SIE-00019 — 4MLKA1A — Siemens — main-lug-kit — CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 1-ph

OEM part number	4MLKA1A	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKA1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	**A**	S1 equivalent; p.11-15; oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 1-phase (includes neutral)	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	**A**	same as above
Breaker compatibility	n/a (lug kit)	**A**	same as above
Current rating	400A	**A**	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	**B**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	**A**	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00023 — 4MLKA1B — Siemens — main-lug-kit — CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 1-ph

OEM part number	4MLKA1B	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 1-phase (includes neutral) (750 kcmil main lug kits introduced with Revised P1 (s8: '750 kcmil Main Lug kits are now available'))	**A**	same as above
Application	main lug or through-feed (feed-thru) lugs	**A**	same as above
Breaker compatibility	n/a (lug kit)	**A**	same as above
Current rating	400A	**A**	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	**B**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	**A**	same as above
Identification features	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU]	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00020	4MLKA3A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 3-ph

OEM part number	4MLKA3A	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKA3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S1 equivalent; p.11-15; oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 3-phase (includes neutral)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00024	4MLKA3B	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 3-ph

OEM part number	4MLKA3B	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 3-phase (includes neutral) (750 kcmil main lug kits introduced with Revised P1 (s8: '750 kcmil Main Lug kits are now available'))	A	same as above
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU]	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00021	4MLKC1A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A CU main/feed-thru lug kit, 1-ph

OEM part number	4MLKC1A	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKC1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S1 equivalent; p.11-15; oem_spec
Description	Revised P1 400A CU main or feed-thru lug kit, 1-phase (includes neutral)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) 1/0-600 kcmil, CU cable only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00022	4MLKC3A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A CU main/feed-thru lug kit, 3-ph

OEM part number	4MLKC3A	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKC3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S1 equivalent; p.11-15; oem_spec
Description	Revised P1 400A CU main or feed-thru lug kit, 3-phase (includes neutral)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) 1/0-600 kcmil, CU cable only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00015	MLKA1A	Siemens	main-lug-kit	CURRENT (2021)
Revised P1 250A AL main/feed-thru lug kit, 1-ph				
OEM part number	MLKA1A	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Alternate / superseded numbers	MLKA1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	**A**	S1 equivalent; p.11-15; oem_spec	
Description	Revised P1 250A AL main or feed-thru lug kit, 1-phase (includes neutral)	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Application	main lug or through-feed (feed-thru) lugs	**A**	same as above	
Breaker compatibility	n/a (lug kit)	**A**	same as above	
Current rating	250A	**A**	same as above	
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	**B**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference	
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Status	current (2021)	**A**	same as above	
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	**A**	same as above	
Cross-links	Families: RP1			
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values			

EDH-SIE-00016	MLKA3A	Siemens	main-lug-kit	CURRENT (2021)
Revised P1 250A AL main/feed-thru lug kit, 3-ph				
OEM part number	MLKA3A	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Alternate / superseded numbers	MLKA3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	**A**	S1 equivalent; p.11-15; oem_spec	
Description	Revised P1 250A AL main or feed-thru lug kit, 3-phase (includes neutral)	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Application	main lug or through-feed (feed-thru) lugs	**A**	same as above	
Breaker compatibility	n/a (lug kit)	**A**	same as above	
Current rating	250A	**A**	same as above	
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	**B**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference	
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Status	current (2021)	**A**	same as above	
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	**A**	same as above	
Cross-links	Families: RP1			
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values			

EDH-SIE-00017	MLKC1A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 250A CU main/feed-thru lug kit, 1-ph

OEM part number	MLKC1A	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	MLKC1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S1 equivalent; p.11-15; oem_spec
Description	Revised P1 250A CU main or feed-thru lug kit, 1-phase (includes neutral)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00018	MLKC3A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 250A CU main/feed-thru lug kit, 3-ph

OEM part number	MLKC3A	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	MLKC3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S1 equivalent; p.11-15; oem_spec
Description	Revised P1 250A CU main or feed-thru lug kit, 3-phase (includes neutral)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00097	**P1CONACPHAL**	RP1 A/C-phase replacement aluminum branch connectors, kit of 6	—	unknown - may be discontinued (only CU A/C kit listed 2021,
EDH-SIE-00088	**P1CONACPHCU**	RP1 A/C-phase replacement copper branch connectors	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space) B	listed (2021)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00089	**P1CONBPHAL**	RP1 B-phase replacement aluminum branch connectors	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space) **B**	listed (2021)
EDH-SIE-00090	**P1CONBPHCU**	RP1 B-phase replacement copper branch connectors	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space) **B**	listed (2021)

EDH-SIE-00097 — P1CONACPHAL — Siemens — connector-strap — UNKNOWN - MAY BE DISCO

RP1 A/C-phase replacement aluminum branch connectors, kit of 6

OEM part number	P1CONACPHAL	**A**	S1 oem_spec
Description	A- or C-phase aluminum connector kit, 6 pieces (search-summary of a Siemens spec sheet) (Not present in SpeedFax 2021 p.11-21 table; reported in a web search summary of stoneway.com Siemens spec sheet (page returned HTML, not retrievable))	**C**	S1 distributor
Status	unknown - may be discontinued (only CU A/C kit listed 2021, 'Also can be used to replace AL A/C-Phase Connectors')	**C**	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Confirm P1CONACPHAL exists as an OEM catalog number*		

EDH-SIE-00088 — P1CONACPHCU — Siemens — connector-strap — LISTED (2021)

RP1 A/C-phase replacement copper branch connectors

OEM part number	P1CONACPHCU	**A**	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 A/C-phase replacement copper branch connectors, kit of 6 pcs plus mounting hardware; can also replace AL A/C-phase connectors	**A**	same as above
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	**B**	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	**B**	S1 p.11-16; inference
Kit contents	qty/kit 6	**A**	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Material	copper	**A**	same as above
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	**B**	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Status	listed (2021)	**A**	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2572-02	**A**	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*Connector geometry differs between A/C and B phase; is AL A/C-phase kit (P1CONACPHAL) still offered? Earlier web listings name P1CONACPHAL but 2021 SpeedFax omits it.*		

EDH-SIE-00089	P1CONBPHAL	Siemens	connector-strap	LISTED (2021)

RP1 B-phase replacement aluminum branch connectors

OEM part number	P1CONBPHAL	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 B-phase replacement aluminum branch connectors, kit of 6 pcs plus mounting hardware	A	same as above
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	B	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	B	S1 p.11-16; inference
Kit contents	qty/kit 6	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Material	aluminum	A	same as above
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	B	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Status	listed (2021)	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2573-01	A	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00090	P1CONBPHCU	Siemens	connector-strap	LISTED (2021)

RP1 B-phase replacement copper branch connectors

OEM part number	P1CONBPHCU	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 B-phase replacement copper branch connectors, kit of 6 pcs plus mounting hardware	A	same as above
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	B	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	B	S1 p.11-16; inference
Kit contents	qty/kit 6	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Material	copper	A	same as above
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	B	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Status	listed (2021)	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2573-02	A	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00040	**2NLK42B**	RP1 250A 200% neutral lug kit	—	current (2021); Revised P1 only

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00041	**2NLK54B**	RP1 250A 200% neutral lug kit	—	current (2021); Revised P1 only
EDH-SIE-00042	**42NLK54B**	RP1 400A 200% neutral lug kit	—	current (2021); Revised P1 only
EDH-SIE-00038	**CNLK42B**	RP1 CU neutral lug kit 42B	—	current (2021); Revised P1 only
EDH-SIE-00039	**CNLK54B**	RP1 CU neutral lug kit 54B	—	current (2021); Revised P1 only
EDH-SIE-00035	**LNLK4X11B**	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long	—	current (2021); Revised P1 only
EDH-SIE-00033	**LNLK5X12A**	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]	—	current (2021); Revised P1 only
EDH-SIE-00036	**LNLK6X17B**	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	—	current (2021); Revised P1 only
EDH-SIE-00034	**LNLK7X18A**	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]	—	current (2021); Revised P1 only
EDH-SIE-00037	**LNLK7X20B**	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	—	current (2021); Revised P1 only

EDH-SIE-00040 — 2NLK42B — Siemens — neutral-assembly — CURRENT (2021); REVISE

RP1 250A 200% neutral lug kit

OEM part number	2NLK42B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	2NLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	2NLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 250A 200% neutral lug kit: CU strips (2 short, 2 long; 17 & 25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware; 200% kits require CU neutrals	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A (18, 30, 42 ckt)	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 250A 200% neutral lug kit: CU strips (2 short, 2 long; 17 & 25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware; 200% kits require CU neutrals	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00041	2NLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 250A 200% neutral lug kit

OEM part number	2NLK54B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	2NLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 250A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A (54, 66 ckt)	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 250A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00042	42NLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 400A 200% neutral lug kit

OEM part number	42NLK54B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	42NLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	42NLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
	42NLK54A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 400A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lugs (600 kcmil and 300 kcmil) and hardware	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	all 400A (30, 54, 66 ckt)	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 400A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lugs (600 kcmil and 300 kcmil) and hardware	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00038	CNLK42B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 CU neutral lug kit 42B

OEM part number	CNLK42B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	CNLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	CNLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 CU neutral lug kit 42B: 2 short & 2 long CU strips (17 & 25 pos), CU riser extension and all hardware; CU strips 1/0 max, CU cable only	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A (18, 30, 42 ckt)	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 CU neutral lug kit 42B: 2 short & 2 long CU strips (17 & 25 pos), CU riser extension and all hardware; CU strips 1/0 max, CU cable only	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00039	CNLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 CU neutral lug kit 54B

OEM part number	CNLK54B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	CNLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 CU neutral lug kit 54B: 4 long CU strips (25 pos), CU riser extension and hardware; 1/0 max, CU cable only	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	all 400A (30, 54, 66) and 250A 54/66 ckt	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 CU neutral lug kit 54B: 4 long CU strips (25 pos), CU riser extension and hardware; 1/0 max, CU cable only	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00035	LNLK4X11B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long

OEM part number	LNLK4X11B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long; 2 strips per pack	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long; 2 strips per pack	A	same as above
Dimensions	strip length 6.17 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00033	LNLK5X12A	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]

OEM part number	LNLK5X12A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]; short 1/0 replacement neutral strip (17 pos), 5.80in long; 2 strips per pack	A	same as above
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]; short 1/0 replacement neutral strip (17 pos), 5.80in long; 2 strips per pack	A	same as above
Dimensions	strip length 5.80 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00036	LNLK6X17B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long

OEM part number	LNLK6X17B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK42A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long; 2 strips per pack	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long; 2 strips per pack	A	same as above
Dimensions	strip length 8.67 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00034	LNLK7X18A	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]

OEM part number	LNLK7X18A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]; long 1/0 replacement neutral strip (25 pos), 8.14in long; 2 strips per pack	A	same as above
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]; long 1/0 replacement neutral strip (25 pos), 8.14in long; 2 strips per pack	A	same as above
Dimensions	strip length 8.14 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00037	LNLK7X20B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long

OEM part number	LNLK7X20B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long; 2 strips per pack	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long; 2 strips per pack	A	same as above
Dimensions	strip length 9.92 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00099	**ECGK**	Copper equipment ground bus kit	—	current (2021)
EDH-SIE-00098	**EGK**	Al/Cu equipment ground bus kit	—	current (2021)
EDH-SIE-00101	**ICGK**	Insulated copper ground bus kit	—	current (2021)
EDH-SIE-00100	**IGK**	Insulated Al/Cu ground bus kit	—	current (2021)

EDH-SIE-00099	ECGK	Siemens	ground-bar	CURRENT (2021)

Copper equipment ground bus kit

OEM part number	ECGK	A	S1 pp.11-20, 11-22; oem_spec
Description	Copper equipment ground bus kit: (6) #14-1/0 and (15) #14-6 connections (21 holes); CU cable only	A	same as above
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S1 pp.11-8, 11-22; oem_spec
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S1 p.11-22; oem_spec
Status	current (2021)	A	S1 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SIE-00098	EGK	Siemens	ground-bar	CURRENT (2021)

Al/Cu equipment ground bus kit

OEM part number	EGK	A	S1 pp.11-20, 11-22; oem_spec
Description	Al/Cu equipment ground bus kit: (6) #14-1/0 and (15) #14-6 connections (21 holes)	A	same as above
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S1 pp.11-8, 11-22; oem_spec
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S1 p.11-22; oem_spec
Status	current (2021)	A	S1 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SIE-00101	ICGK	Siemens	ground-bar	CURRENT (2021)

Insulated copper ground bus kit

OEM part number	ICGK	A	S1 pp.11-20, 11-22; oem_spec
Description	Insulated copper ground bus kit (bar on Glastic insulator), 21 holes	A	same as above
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S1 pp.11-8, 11-22; oem_spec
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S1 p.11-22; oem_spec
Status	current (2021)	A	S1 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SIE-00100	IGK	Siemens	ground-bar	CURRENT (2021)

Insulated Al/Cu ground bus kit

OEM part number	IGK	A	S1 pp.11-20, 11-22; oem_spec
Description	Insulated Al/Cu ground bus kit (bar on Glastic insulator), 21 holes	A	same as above
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S1 pp.11-8, 11-22; oem_spec
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S1 p.11-22; oem_spec
Status	current (2021)	A	S1 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00092	**P1DFS250AFT**	P1 250A deadfront support	—	listed (2021)
EDH-SIE-00093	**P1DFS250ANFT**	P1 250A deadfront support	—	listed (2021)
EDH-SIE-00094	**P1DFS400A**	P1 400A deadfront support (new for 3VA)	—	listed (2021)

EDH-SIE-00092	P1DFS250AFT	Siemens	mounting-bracket	LISTED (2021)

P1 250A deadfront support

OEM part number	P1DFS250AFT	A	S1 p.11-20; oem_spec
Description	P1 250A deadfront support, feed-thru interiors only (4 per interior); part 11-D-3323-01 replaces 11-D-3212-01	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-D-3323	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00093	P1DFS250ANFT	Siemens	mounting-bracket	LISTED (2021)

P1 250A deadfront support

OEM part number	P1DFS250ANFT	A	S1 p.11-20; oem_spec
Description	P1 250A deadfront support, non-feed-thru interiors only (4 per interior); part 11-D-3323-02 replaces 11-D-3212-02	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-D-3323	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00094	P1DFS400A	Siemens	mounting-bracket	LISTED (2021)

P1 400A deadfront support (new for 3VA)

OEM part number	P1DFS400A	A	S1 p.11-20; oem_spec
Description	P1 400A deadfront support (new for 3VA), FT and NFT interiors; 11-D-3315-01 replaces 11-D-3004-01 (4 per interior)	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-D-3315	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00231	**SEBKP1P2P3V1**	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main	—	unknown
EDH-SIE-00224	**SEBKRP1V1**	SEB kit for RP1 with FD, QJ or QR horizontal main	—	unknown
EDH-SIE-00225	**SEBKRP1V2**	SEB kit for RP1 with ED horizontal main	—	unknown
EDH-SIE-00226	**SEBKRP1V3**	SEB kit for RP1 with back-fed BL/BQD main in unit space	—	unknown
EDH-SIE-00227	**SEBKRP1V4**	SEB kit for RP1 with back-fed xGB main in unit space	—	unknown
EDH-SIE-00228	**SEBKRP1V5**	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets	—	unknown
EDH-SIE-00229	**SEBKRP1V6**	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit	—	unknown
EDH-SIE-00230	**SEBKRP1V7**	SEB kit for RP1 with 3VA52/61/62 horizontal main	—	unknown

EDH-SIE-00231	SEBKP1P2P3V1	Siemens	barrier	STATUS UNKNOWN

SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main

OEM part number	SEBKP1P2P3V1	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1157-01 / 11-D-2740-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00224	SEBKRP1V1	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with FD, QJ or QR horizontal main

OEM part number	SEBKRP1V1	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with FD, QJ or QR horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1148-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00225	SEBKRP1V2	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with ED horizontal main

OEM part number	SEBKRP1V2	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with ED horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1148-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00226	SEBKRP1V3	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with back-fed BL/BQD main in unit space

OEM part number	SEBKRP1V3	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with back-fed BL/BQD main in unit space; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1149-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00227	SEBKRP1V4	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with back-fed xGB main in unit space

OEM part number	SEBKRP1V4	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with back-fed xGB main in unit space; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1149-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00228	SEBKRP1V5	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets

OEM part number	SEBKRP1V5	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1165-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00229	SEBKRP1V6	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit

OEM part number	SEBKRP1V6	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1194-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00230	SEBKRP1V7	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with 3VA52/61/62 horizontal main

OEM part number	SEBKRP1V7	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with 3VA52/61/62 horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-B-1060-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00064	**DFFP01B**	P1 main or subfeed 250A blank filler plate	—	listed (2021)
EDH-SIE-00065	**DFFP01C**	Revised P1 400A main blank filler plate	—	listed (2021)
EDH-SIE-00062	**DFFP1A**	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	BL/BQD/xGB/xGB2/ED/3VA 41 blank positions; suitable for replacing QF3 a A	current (2021)
EDH-SIE-00070	**DFFPFD01**	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels	—	listed (2021)
EDH-SIE-00071	**DFFPJD01**	JD main filler plate (plastic)	—	listed (2021)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00072	**DFFPJD02**	JD main filler plate for Revised P1 400A with large MB opening only	—	listed (2021)
EDH-SIE-00073	**DFFPQJ01**	QJ main filler plate	—	listed (2021)
EDH-SIE-00074	**DFFPQJ02**	QJ main filler plate	—	listed (2021)
EDH-SIE-00066	**DFFPVA41A**	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	—	listed (2021)
EDH-SIE-00067	**DFFPVA5262A**	RP1 main or subfeed filler	—	listed (2021)
EDH-SIE-00068	**DFFPVA5363A**	RP1 400A main filler for 3VA53/63	—	listed (2021)
EDH-SIE-00075	**MBKQRFK**	P1 / Revised P1 deadfront filler for 1PH/3PH QR main	—	listed (2021)

EDH-SIE-00064 **DFFP01B** Siemens filler-plate **LISTED (2021)**

P1 main or subfeed 250A blank filler plate

OEM part number	DFFP01B	**A**	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFP01A [supersedes]	**A**	same as above
	11-D-4560-01 [supersedes]	**A**	same as above
	12-A-1801-01 [supersedes]	**A**	same as above
Description	P1 main or subfeed 250A blank filler plate, 1 piece (Original or Revised P1; also S1/S2/SE); installs vertical for 400A main w/ small DF opening	**A**	same as above
Application	main / subfeed deadfront opening	**A**	same as above
Status	listed (2021)	**A**	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4612-01	**A**	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00065 **DFFP01C** Siemens filler-plate **LISTED (2021)**

Revised P1 400A main blank filler plate

OEM part number	DFFP01C	**A**	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	Revised P1 400A main blank filler plate, 1 piece, for large MB opening only	**A**	same as above
Application	main / subfeed deadfront opening	**A**	same as above
Status	listed (2021)	**A**	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4600-01	**A**	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00062	DFFP1A	Siemens	filler-plate	CURRENT (2021)

1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)

OEM part number	DFFP1A	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFP1 (Earlier number; DFFP1 fits tighter in the opening than QF3 (stronger spring tabs))	A	S1 supersedes; pp.11-23, 11-67, 11-96; oem_spec
	12-1800-01 (old reference/drawing number)	A	S1 alias; p.11-20; oem_spec
	11-D-4554-01 [alias] (old eng. ref; current eng ref 11-D-4613-01)	A	same as above
	QF3 (QF3 is approved in all panelboards/switchboards and is the only one approved in residential products; slides out when P1-P3 deadfront removed)	A	S1 equivalent; p.11-23 footnotes a,b; oem_spec
Description	Blank filler, 1 inch snap-in; replaced old QF3 and DFFP1 in Systems products	A	S1 p.11-20; oem_spec
Application	blank 1in branch positions; also fills void where a 2-pole breaker is installed in a 3-pole position	A	S1 p.11-23 footnote a; oem_spec
Installation location	Deadfront branch openings (horizontal or vertical)	A	S1 p.11-23 row A1; oem_spec
Breaker compatibility	BL/BQD/xGB/xGB2/ED/3VA41 blank positions; suitable for replacing QF3 and DFFP1 in P1-P5 panelboards and switchboards	A	S1 p.11-23; oem_spec
Status	current (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng. ref 11-D-4613-01; snap-in with small spring side tabs	A	S1 pp.11-20, 11-23; oem_spec
Cross-links	Families: RP1, P1, S1/S2, P2, P3, P4, P5, SB · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', ED (ED2/ED4/ED6/HED4/HHED6) and CED6, 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Exact outline dimensions of DFFP1A vs QF3 (distributor s13 gives QF3 12.9in x 5.2in which is likely packaging)*		

EDH-SIE-00070	DFFPFD01	Siemens	filler-plate	LISTED (2021)

FD main filler plate (plastic) for 1-ph and 3-ph P1 panels

OEM part number	DFFPFD01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels; also P2/P3 and S1/S2/SE	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Material	plastic	A	S1 p.11-53; oem_spec
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1803-61	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1, S1/S2, SE, P2, P3 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00071	DFFPJD01	Siemens	filler-plate	LISTED (2021)

JD main filler plate (plastic)

OEM part number	DFFPJD01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	JD main filler plate (plastic), 1-ph and 3-ph P1, small MB opening; also P2/P3 and S1/S2	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Material	plastic	A	S1 p.11-53; oem_spec
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4522-61	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1, S1/S2, P2, P3 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00072	DFFPJD02	Siemens	filler-plate	LISTED (2021)

JD main filler plate for Revised P1 400A with large MB opening only

OEM part number	DFFPJD02	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	JD main filler plate for Revised P1 400A with large MB opening only	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4598-01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00073	DFFPQJ01	Siemens	filler-plate	LISTED (2021)

QJ main filler plate

OEM part number	DFFPQJ01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	QJ main filler plate, 3-phase (3-pole) P1 panels	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1804-61	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00074	DFFPQJ02	Siemens	filler-plate	LISTED (2021)

QJ main filler plate

OEM part number	DFFPQJ02	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	QJ main filler plate, 1-phase (2-pole) P1 panels	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1804-62	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00066	DFFPVA41A	Siemens	filler-plate	LISTED (2021)

RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max

OEM part number	DFFPVA41A	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFPED01 [supersedes]	A	same as above
	12-A-1802-01 [supersedes]	A	same as above
Description	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4604-01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA41, BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00067	DFFPVA5262A	Siemens	filler-plate	LISTED (2021)

RP1 main or subfeed filler

OEM part number	DFFPVA5262A	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	RP1 main or subfeed filler, single mount 3VA52/61/62 (150-250A)	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4617-01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00068	DFFPVA5363A	Siemens	filler-plate	LISTED (2021)

RP1 400A main filler for 3VA53/63

OEM part number	DFFPVA5363A	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	RP1 400A main filler for 3VA53/63, large MB opening only (also used in P2/P3)	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4599-01 (p.11-23) / 11-D-4617-01 (p.11-20)	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00075	MBKQRFK	Siemens	filler-plate	LISTED (2021)

P1 / Revised P1 deadfront filler for 1PH/3PH QR main

OEM part number	MBKQRFK	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	P1 / Revised P1 deadfront filler for 1PH/3PH QR main, horizontal mount only	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-2643-01 (p.11-20) / 11-D-4563-01 (p.11-23)	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00240	**EWK1**	End wall kit with knockouts (20in W x 5.75in D) 20in	—	unknown
EDH-SIE-00243	**EWK1B**	End wall kit without knockouts (20in W x 5.75in D) 20in	—	unknown
EDH-SIE-00242	**EWK3**	End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in	—	unknown

EDH-SIE-00240	EWK1	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit with knockouts (20in W x 5.75in D) 20in

OEM part number	EWK1	A	S1 p.11-34; oem_spec
Description	End wall kit with knockouts (20in W x 5.75in D), Type 1 only	A	same as above
Dimensions	20in W x 5.75in D	A	same as above
Cross-links	Families: RP1, P1, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00243	EWK1B	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit without knockouts (20in W x 5.75in D) 20in

OEM part number	EWK1B	A	S1 p.11-34; oem_spec
Description	End wall kit without knockouts (20in W x 5.75in D), Type 1 only	A	same as above
Dimensions	20in W x 5.75in D	A	same as above
Cross-links	Families: RP1, P1, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00242	EWK3	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in

OEM part number	EWK3	A	S1 p.11-34; oem_spec
Description	End wall kit - open center space - ref B74FLR (20in W x 5.75in D), Type 1 only	A	same as above
Dimensions	20in W x 5.75in D	A	same as above
Cross-links	Families: RP1, P1, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00096	**BK1A**	Revised P1 bonding kit including service disconnect label	—	listed (2021)
EDH-SIE-00095	**IMK1**	Interior mounting kit with adjustment provisions for P1/P2/P3	—	listed (2021)
EDH-SIE-00014	**MBKBFA**	P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)	—	unknown

EDH-SIE-00096	BK1A	Siemens	hardware-kit	LISTED (2021)

Revised P1 bonding kit including service disconnect label

OEM part number	BK1A	A	S1 p.11-20; oem_spec
Description	Revised P1 bonding kit including service disconnect label	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-A-2024-01	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00095	IMK1	Siemens	hardware-kit	LISTED (2021)

Interior mounting kit with adjustment provisions for P1/P2/P3

OEM part number	IMK1	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	Interior mounting kit with adjustment provisions for P1/P2/P3	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-A-2024-01	A	same as above
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00014	MBKBFA	Siemens	hardware-kit	STATUS UNKNOWN

P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)

OEM part number	MBKBFA	A	S9 oem_spec
Description	KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER; field installable kit	A	same as above
Application	main (back-fed breaker in unit space; uses 2 or 3 positions of unit space)	A	S1 p.11-7 note 1; oem_spec
Kit contents	'MAIN' label and instructions for back-fed BL/BQD or GB main (s8 table: 'Label Kit # MBKBFA ... MAIN label and'; s7 lists 'MBKDFA - Back Fed Main Breaker Label and Instructions for BL/BQD or GB breaker' (likely typo of MBKBFA))	B	S8, S7 oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is 'MBKDFA' in the flyer (s7) a typo of MBKBFA?*		
Open question	*Does the kit include a hold-down/retaining clip as required for back-fed breakers? Not stated.*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00091	**P1SCRWS**	P1 branch breaker mounting screws	—	listed (2021)

EDH-SIE-00091	P1SCRWS	Siemens	fastener	LISTED (2021)

P1 branch breaker mounting screws

OEM part number	P1SCRWS	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	P1 branch breaker mounting screws, pack of 42 (part 11-A-1505-03), 10-32 x 0.312in hex washer head - do not substitute	A	same as above
Kit contents	qty/kit 42	A	same as above
Fasteners	10-32 x 0.312in hex washer head screw, part 11-A-1505-03	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-A-2010-01	A	same as above
Cross-links	Families: RP1, P1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00013	**MBKVA5363JD**	RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)	—	'to be available 2021' / 'tbd - being developed'

EDH-SIE-00013	MBKVA5363JD	Siemens	conversion-kit	'TO BE AVAILABLE 2021'

RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)

OEM part number	MBKVA5363JD	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Allows 3VA53/63 in old 400A RP1 with small deadfront opening; no access to breaker adjustments without removing deadfront	A	same as above
Application	main (400A)	A	same as above
Status	'to be available 2021' / 'tbd - being developed'	A	S1 pp.11-13, 11-20; oem_spec
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Was MBKVA5363JD ever released? SpeedFax 2021 lists it as tbd/being developed*		

6.7 S1/S2 — Type S1 / S2 lighting panelboards

FAM-SIE-003 · panelboard · aka S1, S2, Sentron S1, Sentron S2 · markings: Siemens

Earlier Siemens (Sentron-era) bolt-on lighting panelboards preceding P1/P2. SpeedFax states that all original P1 kits for 250A-and-below panels work in 250A-max S1/S2 panels; 400/600A S1/S2 use the SMBK* strap kits. Revised P1 kits will not work in S1/S2.

Attribute	Value	Cl.	Sources
Status	discontinued; some kits available	**A**	S1 pp.11-15, 11-20; oem_spec
Successor	P1 / P2 (Implied by SpeedFax grouping; not stated explicitly)	**C**	S1 inference

Breaker families associated: BL, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)
Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards
Also fits this family (entry printed elsewhere): MLKA1, MLKA3, MLKC1, MLKC3, 4MLKA1, 4MLKA3, 4MLKC1, 4MLKC3, MBKBL1, MBKBL3, MBKBC3, MBKNB1, MBKNB3, MBKED1, MBKED3, MBKQR1, MBKQR3, MBKFD1, MBKFD3, DFFP1A, DFFP01B, DFFPFD01, DFFPJD01

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00056	**SMBKED1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph	2-pole ED2, ED4, ED6, HED4, HHED6 **A**	listed (2021)
EDH-SIE-00057	**SMBKED3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph	3-pole ED2, ED4, ED6, HED4, HHED6 **A**	listed (2021)
EDH-SIE-00058	**SMBKFD1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph	2-pole FXD6, FD6, HFXD6, HFD6 **A**	listed (2021)
EDH-SIE-00059	**SMBKFD3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph	3-pole FXD6, FD6, HFXD6, HFD6 **A**	listed (2021)
EDH-SIE-00060	**SMBKJD1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph	2-pole JD6, JXD6, HJD6, HJXD6 **A**	listed (2021)
EDH-SIE-00061	**SMBKJD3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph	3-pole JD6, JXD6, HJD6, HJXD6 **A**	listed (2021)

EDH-SIE-00056 **SMBKED1** Siemens main-breaker-kit **LISTED (2021)**

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph

OEM part number	SMBKED1	**A**	S1 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole ED2, ED4, ED6, HED4, HHED6; breaker not included	**A**	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	**A**	same as above
Breaker compatibility	2-pole ED2, ED4, ED6, HED4, HHED6	**A**	same as above
Current rating	125A max	**A**	same as above
Status	listed (2021)	**A**	same as above
Cross-links	Families: S1/S2, SE · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00057	SMBKED3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph

OEM part number	SMBKED3	A	S1 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole ED2, ED4, ED6, HED4, HHED6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	3-pole ED2, ED4, ED6, HED4, HHED6	A	same as above
Current rating	125A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00058	SMBKFD1	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph

OEM part number	SMBKFD1	A	S1 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole FXD6, FD6, HFXD6, HFD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	2-pole FXD6, FD6, HFXD6, HFD6	A	same as above
Current rating	250A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00059	SMBKFD3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph

OEM part number	SMBKFD3	A	S1 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole FXD6, FD6, HFXD6, HFD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	3-pole FXD6, FD6, HFXD6, HFD6	A	same as above
Current rating	250A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00060	SMBKJD1	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph

OEM part number	SMBKJD1	A	S1 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole JD6, JXD6, HJD6, HJXD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	2-pole JD6, JXD6, HJD6, HJXD6	A	same as above
Current rating	400A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00061	SMBKJD3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph

OEM part number	SMBKJD3	A	S1 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole JD6, JXD6, HJD6, HJXD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	3-pole JD6, JXD6, HJD6, HJXD6	A	same as above
Current rating	400A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.8 SE — Type SE panelboard

FAM-SIE-004 · panelboard · aka SE panels · markings: Siemens

Legacy Siemens panelboard type grouped with S1/S2 in SpeedFax replacement tables. SMBK* strap kits fit all SE panels; only AL 250A MLO kits (MLKA1/MLKA3) available for SE. Construction details unknown.

Attribute	Value	Cl.	Sources
Status	discontinued	A	S1 p.11-15; oem_spec

Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards
Also fits this family (entry printed elsewhere): MLKA1, MLKA3, SMBKED1, SMBKED3, SMBKFD1, SMBKFD3, SMBKJD1, SMBKJD3, DFFP01B, DFFPFD01

6.9 CDP6 — Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)

FAM-SIE-010 · switchboard · aka CDP-5, CDP-6, CDP6, SPP6, VB-5, VB-6, FC20, FC-20, FCI, FC-I, FCII, FC-II, FCRS, Class II · markings: ITE, Gould ITE, Siemens-Allis, Siemens

Legacy distribution panelboard and switchboard lines served by the Series 6 connecting strap kits (6E62, 6F62, 6JJ62, 6LL61...) and 6FPB blank plates. 2005 Siemens price list states these kits fit 'switchboards manufactured since 1974'. Equipment lineage (ITE/Gould-ITE/Siemens-Allis) for each type not confirmed in OEM documents in this batch.

Attribute	Value	Cl.	Sources
Status	discontinued equipment; strap kits still catalogued (Canada) (Equipment status inferred from absence in current US SpeedFax)	B	S2 p.11-15; oem_spec
Era of manufacture	Strap kits fit switchboards manufactured since 1974	A	S3 p.8-13; oem_spec

Breaker families associated: BQ / BQH / HBQ (bolt-on, legacy), ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, QJ2 / QJH2 / QJ2-H / HQJ2H
Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S2 Power Product Catalogue Section 11 Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/; S3 Discount Schedule A, page 8-13 2005 Electrical Distribution Products price list - Switchboard

Replacement and Modificatio
Also fits this family (entry printed elsewhere): SDGD, SBLBD, S3VA41TD, S3VA41TDHD, SGB2D, SE6D, 6CLE2, S3VA52TD, 6QR2, SFGD, SF6D, SCFD, S3VA53TD, S3VA63TD, SJG2D, SJG1D, SJ1D, SJ2D, SCJD, S3VA54TD, S3VA64TD, SLGD, SL6D, SCLD, SSL6D, SSCLD, MG1D, SLM1D, SMND, SSMND, NG1D, 6FPB01, 6FPB02, 6FPB03, 6FPB05, 6FPB10, 6FPB15

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00201	**6BL2C**	6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)	BQ, BQH, HB, BL, BLH, HBL [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00191	**6CLF1**	6CLF1 connecting strap kit - CFD6 (5in, single)	CFD6 [s3]; CFD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00194	**6CLJ1**	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	CJD6 [s3]; CJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00198	**6CLL1**	6CLL1 connecting strap kit - CLD6 (8.75in, single)	CLD6 [s3]; CLD6, SCLD [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00188	**6E62**	6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)	ED2, ED4, ED6, HED4, HED6 [s3]; ED2, ED4, ED6, HED4 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00190	**6F62**	6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)	FXD6, FD6, HFD6 [s3]; FXD6, FD6, HFD6, HHFD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00192	**6JJ61**	6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single)	JXD2, JXD6, JD6, HJD6 single branch [s3] **A**	listed in 2005 price list
EDH-SIE-00193	**6JJ62**	6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)	JXD2, JXD6, JD6, HJD6 double branch [s3]; JXD6, JD6, HJD6, HHJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00197	**6LL61**	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	LXD6, LD6, HLD6 [s3]; LXD6, LD6, HLD6, HHLD6, SLD6, SHLD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00203	**6M61C**	6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)	MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00204	**6N61C**	6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)	NXD6, ND6, HND6, CND6, SHND6, SCND6 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00189	**6QJ2**	6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)	QJ2, QJH2, QJ2-H [s3] **A**	listed in 2005 price list
EDH-SIE-00196	**6SCJ1**	6SCJ1 connecting strap kit - SCJD6 (8.75in, single)	SCJD6 [s3] **A**	listed in 2005 price list
EDH-SIE-00200	**6SCL1**	6SCL1 connecting strap kit - SCLD6 (8.75in, single)	SCLD6 [s3] **A**	listed in 2005 price list
EDH-SIE-00202	**6SCL61C**	6SCL61C connecting strap kit - SCJD6 (8.75in, single)	SCJD6 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00195	**6SJL1**	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	SJL, SJD6, SHJD6 [s3]; SJD6, SHJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00199	**6SLL1**	6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)	SLL, SLD6, SHLD6 [s3] **A**	listed in 2005 price list

EDH-SIE-00201	6BL2C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)

OEM part number	6BL2C	**A**	S2 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for BQ, BQH, HB, BL, BLH, HBL branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S2 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	BQ, BQH, HB, BL, BLH, HBL [s2]	**A**	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S2 p.11-15; oem_spec
Material	copper only (footnote e) (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S2 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	**A**	S2 oem_spec
Cross-links	Families: CDP6, SB · Breakers: BQ / BQH / HBQ (bolt-on, legacy), BL		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*Distributor listings disagree on breaker list (BL/BLH/HBL/BQD/BQD6 vs BQ/BQH/HB) - Canadian OEM table lists 'BQ, BQH, HB, BL, BLH, HBL'*		

EDH-SIE-00191	6CLF1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLF1 connecting strap kit - CFD6 (5in, single)

OEM part number	6CLF1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLF1C	A	S2 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CFD6 branch breaker(s), single (s) mount, 5in unit height	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	CFD6 [s3]; CFD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6CLF1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $1553.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00194	6CLJ1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLJ1 connecting strap kit - CJD6 (8.75in, single)

OEM part number	6CLJ1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLJ1C	A	S2 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	CJD6 [s3]; CJD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6CLJ1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $2122.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00198	6CLL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLL1 connecting strap kit - CLD6 (8.75in, single)

OEM part number	6CLL1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLL1C	A	S2 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	CLD6 [s3]; CLD6, SCLD [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6CLL1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $2525.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00188	6E62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)

OEM part number	6E62	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for ED2, ED4, ED6, HED4, HED6 branch breaker(s), twin (d) mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	ED2, ED4, ED6, HED4, HED6 [s3]; ED2, ED4, ED6, HED4 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $845.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00190	6F62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)

OEM part number	6F62	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for FXD6, FD6, HFD6 branch breaker(s), twin (d) mount, 5in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	FXD6, FD6, HFD6 [s3]; FXD6, FD6, HFD6, HHFD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $1529.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00192	6JJ61	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single)

OEM part number	6JJ61	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for JXD2, JXD6, JD6, HJD6 single branch branch breaker(s), single (s) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single (S)	A	S3 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	JXD2, JXD6, JD6, HJD6 single branch [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S3 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S3 oem_spec
Identification features	2005 list price $2122.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00193	6JJ62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)

OEM part number	6JJ62	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for JXD2, JXD6, JD6, HJD6 double branch branch breaker(s), twin (d) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	JXD2, JXD6, JD6, HJD6 double branch [s3]; JXD6, JD6, HJD6, HHJD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $2349.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00197	6LL61	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)

OEM part number	6LL61	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6LL61C	A	S2 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for LXD6, LD6, HLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	LXD6, LD6, HLD6 [s3]; LXD6, LD6, HLD6, HHLD6, SLD6, SHLD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6LL61C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $2525.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00203	6M61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)

OEM part number	6M61C	A	S2 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 branch breaker(s), single mount, 10in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S2 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 10 in (Unit-space height consumed on the interior, not part outline)	A	S2 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: CDP6, SB · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00204	6N61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)

OEM part number	6N61C	A	S2 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for NXD6, ND6, HND6, CND6, SHND6, SCND6 branch breaker(s), single mount, 10in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	NXD6, ND6, HND6, CND6, SHND6, SCND6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S2 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 10 in (Unit-space height consumed on the interior, not part outline)	A	S2 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: CDP6, SB · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00189	6QJ2	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)

OEM part number	6QJ2	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for QJ2, QJH2, QJ2-H branch breaker(s), twin (d) mount, 5in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin (D)	A	S3 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	QJ2, QJH2, QJ2-H [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S3 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S3 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S3 oem_spec
Identification features	2005 list price $1529.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00196	6SCJ1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SCJ1 connecting strap kit - SCJD6 (8.75in, single)

OEM part number	6SCJ1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single (S)	A	S3 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	SCJD6 [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S3 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S3 oem_spec
Identification features	2005 list price $2122.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00200	6SCL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SCL1 connecting strap kit - SCLD6 (8.75in, single)

OEM part number	6SCL1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SCLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single (S)	A	S3 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	SCLD6 [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S3 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S3 oem_spec
Identification features	2005 list price $2525.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00202	6SCL61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6SCL61C connecting strap kit - SCJD6 (8.75in, single)

OEM part number	6SCL61C	A	S2 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD6 branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	SCJD6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S2 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S2 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00195	6SJL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)

OEM part number	6SJL1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6SJL1C	A	S2 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for SJL, SJD6, SHJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	SJL, SJD6, SHJD6 [s3]; SJD6, SHJD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6SJL1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $2122.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00199	6SLL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)

OEM part number	6SLL1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SLL, SLD6, SHLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single (S)	A	S3 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	SLL, SLD6, SHLD6 [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S3 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S3 oem_spec
Identification features	2005 list price $2525.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00063	**QF3**	QF3 1-pole plastic filler plate (load center / legacy switchboard)	—	still approved in panelboards/switchboards; only QF3 approve

EDH-SIE-00063	QF3	Siemens	filler-plate	STILL APPROVED IN PANE

QF3 1-pole plastic filler plate (load center / legacy switchboard)

OEM part number	QF3	**A**	S3 oem_spec
Alternate / superseded numbers	DFFP1A	**A**	S1 superseded_by; p.11-20; oem_spec
	12-1800-01 ('sub no. 12-1800-01')	**C**	S13 alias; distributor
Description	Filler plate, per pole, for BQ, BQH, HBQ, E2, E4, E6, HE4, HE6, E2-A..HE6-A and ED2, ED4, ED6, HED4, HED6 frames in Series 5/6 CDP panelboards and FC-20, Class II, FCI, FCII, SB1, SB2, SB3 switchboards	**A**	S3 p.8-13 'Filler Plates'; oem_spec
Application	blank 1-pole branch positions	**A**	S3 p.8-13; oem_spec
Status	still approved in panelboards/switchboards; only QF3 approved for residential load centers, meter combos	**A**	S1 p.11-23 footnote b-c; oem_spec
Cross-links	Families: CDP6, SB, P1, P2, P3 · Breakers: BQ / BQH / HBQ (bolt-on, legacy), ED (ED2/ED4/ED6/HED4/HHED6) and CED6, BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.10 SB — Type SB1 / SB2 / SB3 distribution switchboards

FAM-SIE-009 · switchboard · aka SB1, SB2, SB3, SB4 (blank plates only) · markings: Siemens

Siemens front-accessible distribution switchboards. Branch MCCBs mount in distribution sections via 'Connection Strap Kits' (same D-suffix kits as P5: SBLBD, SE6D, SF6D, SJ1D, SMND etc. plus S3VA*TD kits), unit space covered with 6FPB blank plates.

Attribute	Value	Cl.	Sources
Status	current	**A**	S2 p.11-2; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQ / BQH / HBQ (bolt-on, legacy), BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, QR2 / QRH2 / HQR2 / HQR2H

Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S2 Power Product Catalogue Section 11 Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/; S3 Discount Schedule A, page 8-13 2005 Electrical Distribution Products price list - Switchboard Replacement and Modificatio

Also fits this family (entry printed elsewhere): DFFP1A, QF3, SDGD, SBLBD, S3VA41TD, S3VA41TDHD, SGB2D, SE6D, 6CLE2, S3VA52TD, 6QR2, SFGD, SF6D, SCFD, S3VA53TD, S3VA63TD, SJG2D, SJG1D, SJ1D, SJ2D, SCJD, S3VA54TD, S3VA64TD, SLGD, SL6D, SCLD, SSL6D, SSCLD, MG1D, SLM1D, SMND, SSMND, NG1D, 6E62, 6QJ2, 6F62, 6CLF1, 6JJ61, 6JJ62, 6CLJ1, 6SJL1, 6SCJ1, 6LL61, 6CLL1, 6SLL1, 6SCL1, 6BL2C, 6SCL61C, 6M61C, 6N61C, S3VA52PR, 6FPB01, 6FPB02, 6FPB03, 6FPB05, 6FPB10

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00182	**S3VA53T2D**	S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)	3VA53, 3VA63 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00185	**S3VA54T2D**	S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)	3VA54, 3VA64 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00186	**S3VA55TD**	S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)	3VA55, 3VA65; 3VA66 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00187	**S3VA57TD**	S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)	3VA57, 3VA67 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00180	**SCED**	SCED connecting strap kit - CED (3.75in, twin)	CED [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00181	**SQRD**	SQRD connecting strap kit - QR (5.00in, twin)	QR [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00184	**SSCJD**	SSCJD connecting strap kit - SCJD (8.75in, single)	SCJD [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00183	**SSJ1D**	SSJ1D connecting strap kit - SJD (8.75in, single)	SJD [s2] **A**	listed in Siemens Canada catalogue 2025

EDH-SIE-00182	S3VA53T2D	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)

OEM part number	S3VA53T2D	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53, 3VA63 branch breaker(s), twin mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S2 p.11-5; oem_spec
Breaker compatibility	3VA53, 3VA63 [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00185	S3VA54T2D	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)

OEM part number	S3VA54T2D	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54, 3VA64 branch breaker(s), twin mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 46in	A	S2 p.11-5; oem_spec
Breaker compatibility	3VA54, 3VA64 [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00186	S3VA55TD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)

OEM part number	S3VA55TD	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA55, 3VA65; 3VA66 branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for 3VA66)in	A	S2 p.11-5; oem_spec
Breaker compatibility	3VA55, 3VA65; 3VA66 [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	800/1000A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00187	S3VA57TD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)

OEM part number	S3VA57TD	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA57, 3VA67 branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S2 p.11-5; oem_spec
Breaker compatibility	3VA57, 3VA67 [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	1200A max (table max-amp rating)	A	same as above
Dimensions	Unit height 10.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00180	SCED	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SCED connecting strap kit - CED (3.75in, twin)

OEM part number	SCED	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	CED [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00181	SQRD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SQRD connecting strap kit - QR (5.00in, twin)

OEM part number	SQRD	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	QR [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	225A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00184	SSCJD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SSCJD connecting strap kit - SCJD (8.75in, single)

OEM part number	SSCJD	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	SCJD [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00183	SSJ1D	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SSJ1D connecting strap kit - SJD (8.75in, single)

OEM part number	SSJ1D	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for SJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	SJD [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00216	**6FPB15**	6FPB15 blank plate, 15in unit space	—	unknown

EDH-SIE-00216	6FPB15	Siemens	filler-plate	STATUS UNKNOWN

6FPB15 blank plate, 15in unit space

OEM part number	6FPB15	A	S2 p.11-15; oem_spec
Description	Blank filler plate 15.00in (381mm) for distribution switch or circuit breaker (CSA SMP / FCI / FCII)	A	S2 p.11-15 Table 17; oem_spec
Dimensions	15.00in (381mm)	A	S2 p.11-15; oem_spec
Cross-links	Families: SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00206	**S3VA53PR**	3VA53/63/54/64 single-mount breaker provision hardware kit	—	unknown

EDH-SIE-00206 **S3VA53PR** Siemens hardware-kit **STATUS UNKNOWN**

3VA53/63/54/64 single-mount breaker provision hardware kit

OEM part number	S3VA53PR	**A**	S2 p.11-14; oem_spec
Description	Provision kit for single mount 3VA53, 3VA63, 3VA54 or 3VA64 breakers on factory-provisioned configurations	**A**	same as above
Kit contents	(3) bus extensions, (3) 3VA5 nut keepers, (3) 3VA6 nut keepers and hardware	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00207	**3VA9233-0QA00**	3VA52 250A nut keeper kit (3)	—	unknown
EDH-SIE-00208	**3VA9243-0QA00**	3VA61/62 150A/250A nut keeper kit (3)	—	unknown
EDH-SIE-00209	**3VA9473-0QA00**	3VA5, 3VA6 400A/600A nut keeper kit (3)	—	unknown

EDH-SIE-00207 **3VA9233-0QA00** Siemens fastener **STATUS UNKNOWN**

3VA52 250A nut keeper kit (3)

OEM part number	3VA9233-0QA00	**A**	S2 p.11-14; oem_spec
Description	3VA52 250A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00208 **3VA9243-0QA00** Siemens fastener **STATUS UNKNOWN**

3VA61/62 150A/250A nut keeper kit (3)

OEM part number	3VA9243-0QA00	**A**	S2 p.11-14; oem_spec
Description	3VA61/62 150A/250A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00209 **3VA9473-0QA00** Siemens fastener **STATUS UNKNOWN**

3VA5, 3VA6 400A/600A nut keeper kit (3)

OEM part number	3VA9473-0QA00	**A**	S2 p.11-14; oem_spec
Description	3VA5, 3VA6 400A/600A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.11 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family BL

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00247	**TA1Q1**	Siemens TA1Q1 line-side lug, BQ 45-125A	BQ family line side 45-125 A; BQXD 45-60 A line (and load on QLD versi A	current
EDH-SIE-00245	**TC1Q1**	Siemens TC1Q1 line-side lug, BQ 15-40A (steel)	BQ, BQH, BQHF, BQE, BQF, BL, BLH, HBL, HBQ line side 15-40 A; BQXD lin A	current

EDH-SIE-00247 **TA1Q1** Siemens lug **CURRENT**

Siemens TA1Q1 line-side lug, BQ 45-125A

OEM part number	TA1Q1	A	S117, S118 s6 p. 7-153; 7-39; oem_spec
Description	Mechanical line-side lug; sold in package of six	A	same as above
Application	accessory	A	same as above
Installation location	Line side	A	S117 s6 p. 7-153; oem_spec
Breaker compatibility	BQ family line side 45-125 A; BQXD 45-60 A line (and load on QLD versions)	A	S117, S118 s6 p. 7-153; 7-39; oem_spec
Kit contents	1 lug; sold in pkg of 6; wire range (1) #8-#1 AWG Cu / #6-#1/0 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: BL		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00245 **TC1Q1** Siemens lug **CURRENT**

Siemens TC1Q1 line-side lug, BQ 15-40A (steel)

OEM part number	TC1Q1	A	S117, S118 s6 p. 7-153; 7-39; oem_spec
Description	Mechanical line-side lug, steel body; sold in package of six	A	same as above
Application	accessory	A	same as above
Installation location	Line side (BQ family; load-side lugs are integral)	A	S117 s6 p. 7-153; oem_spec
Breaker compatibility	BQ, BQH, BQHF, BQE, BQF, BL, BLH, HBL, HBQ line side 15-40 A; BQXD line side; NGG/HGG/LGG 15-30 A	A	S117, S118 s6 p. 7-153; 7-39; oem_spec
Kit contents	1 lug; sold in pkg of 6; wire range (1) #14-#6 AWG Cu / #12-#6 AWG Al (BQXD table: #16-#6 Cu)	A	same as above
Material	{'value': 'Steel', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-153'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: BL, NGG / HGG / LGG (G-frame bolt-on/lug)		
Requires	TNKG3 (EDH-SIE-00249)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00252	**BQFS2**	Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)	Type BQ/BQXD A	current

EDH-SIE-00252	BQFS2	Siemens	barrier	CURRENT

Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)

OEM part number	BQFS2	A	S117, S118 s6 p. 7-39 and accessories page; oem_spec
Alternate / superseded numbers	BQFS1K (Bulk pack of 1000 pieces)	A	S117 equivalent; s6 p. 7-39; oem_spec
Description	Finger safe terminal shield: protects against accidental contact with lugs, 1 per lug; fits line and load end	A	S117, S118 s6 p. 7-39 and accessories page; oem_spec
Application	accessory	A	same as above
Installation location	Over each lug, line or load end	A	S117 p. 7-39; oem_spec
Breaker compatibility	Type BQ/BQXD	A	S117, S118 s6 p. 7-39 and accessories page; oem_spec
Kit contents	2 pieces	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: BL		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family ED (ED2/ED4/ED6/HED4/HHED6) and CED6

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00263	**CCE125**	Siemens CCE125 compression lug, ED 15-125A	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A, 1/2/3-pole A	current
EDH-SIE-00260	**LD1E060**	Siemens LD1E060 load-side lug, ED 1-pole 30-60A	ED, HED 1-pole 30-60 A; CED6 A	current
EDH-SIE-00261	**LD1E100**	Siemens LD1E100 load-side lug, ED 1-pole 70-100A	ED, HED 1-pole 70-100 A A	current
EDH-SIE-00258	**LN1E100**	Siemens LN1E100 lug, ED 30-100A	ED2, ED4, ED6, ED6 ETI, HED4, HHED6 30-100 A A	current
EDH-SIE-00257	**SA1E025**	Siemens SA1E025 lug, ED 2/3-pole 15-25A	ED2, ED4, ED6, HED4, HHED6 (all 2-, 3-pole) 15-25 A A	current
EDH-SIE-00259	**TA1E6125**	Siemens TA1E6125 lug, ED 110-125A	ED/HED/HHED 110-125 A, 2- and 3-pole A	current
EDH-SIE-00264	**TA6ED06**	Siemens TA6ED06 distribution lug, ED	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A A	current
EDH-SIE-00262	**TC1ED6150**	Siemens TC1ED6150 copper-body lug, ED 30-125A	ED, HED 1-, 2-, 3-pole 30-125 A A	current

EDH-SIE-00263	CCE125	Siemens	lug	CURRENT

Siemens CCE125 compression lug, ED 15-125A

OEM part number	CCE125	A	S117, S118 s6 p. 7-155; oem_spec
Description	Compression lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A, 1/2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range #2/0 AWG Cu/Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00260	LD1E060	Siemens	lug	CURRENT

Siemens LD1E060 load-side lug, ED 1-pole 30-60A

OEM part number	LD1E060	A	S117, S118 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Load-side lug	A	same as above
Application	accessory	A	same as above
Installation location	Load side	A	S117 s6 p. 7-154; oem_spec
Breaker compatibility	ED, HED 1-pole 30-60 A; CED6	A	S117, S118 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Kit contents	1 lug; wire range #10-#4 Cu/Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00261	LD1E100	Siemens	lug	CURRENT

Siemens LD1E100 load-side lug, ED 1-pole 70-100A

OEM part number	LD1E100	A	S117, S118 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Load-side lug	A	same as above
Application	accessory	A	same as above
Installation location	Load side	A	S117 s6 p. 7-154; oem_spec
Breaker compatibility	ED, HED 1-pole 70-100 A	A	S117, S118 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Kit contents	1 lug; wire range #4-#1/0 Cu/Al (ED page: #6-#1/0)	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00258	LN1E100	Siemens	lug	CURRENT

Siemens LN1E100 lug, ED 30-100A

OEM part number	LN1E100	A	S117, S118 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Aluminum-body lug, line side (all poles) and load side (2/3-pole)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, ED6 ETI, HED4, HHED6 30-100 A	A	same as above
Kit contents	1 lug; wire range #10-1/0 Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00257	SA1E025	Siemens	lug	CURRENT

Siemens SA1E025 lug, ED 2/3-pole 15-25A

OEM part number	SA1E025	A	S117, S118 s6 p. 7-154; oem_spec
Description	Lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, HED4, HHED6 (all 2-, 3-pole) 15-25 A	A	same as above
Kit contents	1 lug; wire range #14-#10 AWG Cu / #12-#10 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00259	TA1E6125	Siemens	lug	CURRENT

Siemens TA1E6125 lug, ED 110-125A

OEM part number	TA1E6125	A	S117, S118 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Aluminum-body line/load lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED/HED/HHED 110-125 A, 2- and 3-pole	A	same as above
Kit contents	1 lug; wire range #3-3/0 Cu / #1-2/0 Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00264	TA6ED06	Siemens	lug	CURRENT

Siemens TA6ED06 distribution lug, ED

OEM part number	TA6ED06	A	S117, S118 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug; special purpose wire connector	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A	A	same as above
Kit contents	1 lug per kit; wire range #14-#4 AWG Cu / #6-#4 AWG Al, 6 wires	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00262	TC1ED6150	Siemens	lug	CURRENT

Siemens TC1ED6150 copper-body lug, ED 30-125A

OEM part number	TC1ED6150	A	S117, S118 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-155; oem_spec
Description	Optional copper-body mechanical lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED, HED 1-, 2-, 3-pole 30-125 A	A	same as above
Kit contents	1 lug; wire range #10-#1/0 Cu only	A	same as above
Material	{'value': 'Copper body', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00301	**RS2641**	Siemens RS2641 rear-connecting stud, All ED, line side (long) 4.88 in	All ED (100 A) **A**	current
EDH-SIE-00302	**RS2642**	Siemens RS2642 rear-connecting stud, All ED, load side (long) 4.88 in	All ED (100 A) **A**	current
EDH-SIE-00299	**RS2643**	Siemens RS2643 rear-connecting stud, All ED, line side (short) 2.38 in	All ED (100 A) **A**	current
EDH-SIE-00300	**RS2644**	Siemens RS2644 rear-connecting stud, All ED, load side (short) 2.38 in	All ED (100 A) **A**	current

EDH-SIE-00301 **RS2641** Siemens breaker-accessory **CURRENT**

Siemens RS2641 rear-connecting stud, All ED, line side (long) 4.88 in

OEM part number	RS2641	**A**	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Line side (long). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	All ED (100 A)	**A**	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	**A**	same as above
Dimensions	Extension behind breaker 4.88 in	**A**	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	**B**	same as above
Cross-links	Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00302 **RS2642** Siemens breaker-accessory **CURRENT**

Siemens RS2642 rear-connecting stud, All ED, load side (long) 4.88 in

OEM part number	RS2642	**A**	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Load side (long). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	All ED (100 A)	**A**	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	**A**	same as above
Dimensions	Extension behind breaker 4.88 in	**A**	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	**B**	same as above
Cross-links	Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00299	RS2643	Siemens	breaker-accessory	CURRENT

Siemens RS2643 rear-connecting stud, All ED, line side (short) 2.38 in

OEM part number	RS2643	A	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Line side (short). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 2.38 in	A	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00300	RS2644	Siemens	breaker-accessory	CURRENT

Siemens RS2644 rear-connecting stud, All ED, load side (short) 2.38 in

OEM part number	RS2644	A	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Load side (short). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 2.38 in	A	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00267	**CCF250**	Siemens CCF250 compression lug, FD	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 125-250 A, 2/3-pole A	current
EDH-SIE-00265	**TA1FD350A**	Siemens TA1FD350A lug, FD 70-250A	FXD6-A, FD6-A, HFD6, HHFD6, CFD6 70-250 A A	current
EDH-SIE-00268	**TA6FD04**	Siemens TA6FD04 distribution lug, FD	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 70-250 A, 2/3-pole A	current
EDH-SIE-00266	**TC1FD350**	Siemens TC1FD350 copper lug, FD 70-250A	HFD6, HHFD6, CFD6, F(X)D6-A 70-250 A A	current

EDH-SIE-00267	CCF250	Siemens	lug	CURRENT

Siemens CCF250 compression lug, FD

OEM part number	CCF250	A	S117, S118 s6 p. 7-155; oem_spec
Description	Compression lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 125-250 A, 2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range 350 kcmil Cu/Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00265	TA1FD350A	Siemens	lug	CURRENT

Siemens TA1FD350A lug, FD 70-250A

OEM part number	TA1FD350A	A	S117, S118 s6 FD page; s6 p. 7-154; oem_spec
Description	Standard aluminum-body line/load lug; supplied with FD6/HFD6/HHFD6 complete breakers. Suffix 'L' = lugs installed.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FXD6-A, FD6-A, HFD6, HHFD6, CFD6 70-250 A	A	same as above
Kit contents	1 lug; wire range #6 AWG-350 kcmil Cu / #4 AWG-350 kcmil Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00268	TA6FD04	Siemens	lug	CURRENT

Siemens TA6FD04 distribution lug, FD

OEM part number	TA6FD04	A	S117, S118 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 70-250 A, 2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range #14-#4 AWG Cu / #6-#4 AWG Al, 6 wires	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00266	TC1FD350	Siemens	lug	CURRENT

Siemens TC1FD350 copper lug, FD 70-250A

OEM part number	TC1FD350	A	S117, S118 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	HFD6, HHFD6, CFD6, F(X)D6-A 70-250 A	A	same as above
Kit contents	1 lug; wire range #6 AWG-350 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00304	**RS4755**	Siemens RS4755 rear-connecting stud, All FD, long (line or load) 7.06 in	All FD (250 A) **A**	current
EDH-SIE-00303	**RS4756**	Siemens RS4756 rear-connecting stud, All FD, short (line or load) 3.12 in	All FD (250 A) **A**	current

EDH-SIE-00304 **RS4755** Siemens breaker-accessory **CURRENT**

Siemens RS4755 rear-connecting stud, All FD, long (line or load) 7.06 in

OEM part number	RS4755	**A**	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long (line or load). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	All FD (250 A)	**A**	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	**A**	same as above
Dimensions	Extension behind breaker 7.06 in	**A**	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	**B**	same as above
Cross-links	Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00303 **RS4756** Siemens breaker-accessory **CURRENT**

Siemens RS4756 rear-connecting stud, All FD, short (line or load) 3.12 in

OEM part number	RS4756	**A**	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short (line or load). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	All FD (250 A)	**A**	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	**A**	same as above
Dimensions	Extension behind breaker 3.12 in	**A**	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	**B**	same as above
Cross-links	Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00274	**CCL600**	Siemens CCL600 compression lug, JD/LD	JXD2-A, J(X)D6-A, HJ(X)D6-A, HHJ(X)D6-A, CJD6, SJD6-B, SHJD6-B, SCJD6- **A**	current
EDH-SIE-00273	**TA1L6750**	Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil	LD/JD family 250-600 A (Q155 row) **A**	current
EDH-SIE-00270	**TA2J630**	Siemens TA2J630 lug, SJD6-B 65-200A	SJD6-B, SHJD6-B, SCJD6-B 65-200 A **A**	current
EDH-SIE-00269	**TA2J6500**	Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil	JXD2(A), JXD6(A), JD6(A), SJD6-B, HJD6(A), HJXD6(A), HHJXD6, HHJD6, SH **A**	current
EDH-SIE-00275	**TA6JD20**	Siemens TA6JD20 distribution lug, JD/LD	JD/LD families 200-600 A, 2/3-pole **A**	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00271	**TC1J6600**	Siemens TC1J6600 copper lug, JD/LD (100% rated)	J(X)D2(A), J(X)D6(A), HJD6(A), HHJD6, SHJD6-B, L(X)D6(A), HHLD6, HLD6(A	current
EDH-SIE-00272	**TC2J6500**	Siemens TC2J6500 copper lug, JD/LD (100% rated)	JD/LD frames 200-600 A A	current

EDH-SIE-00274 CCL600 Siemens lug CURRENT

Siemens CCL600 compression lug, JD/LD

OEM part number	CCL600	A	S117, S118 s6 p. 7-155; JD page; oem_spec
Description	Compression lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JXD2-A, J(X)D6-A, HJ(X)D6-A, HHJ(X)D6-A, CJD6, SJD6-B, SHJD6-B, SCJD6-B, L(X)D6-A, HL(X)D6-A, CLD6, SLD6-B, SHLD6-B, SCLD6-B 200-600 A, 2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range 500 kcmil (JD page: 1 pc #1/0-500 kcmil Cu/Al)	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00273 TA1L6750 Siemens lug CURRENT

Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil

OEM part number	TA1L6750	A	S117, S118 s6 p. 7-155; JD/LD pages; oem_spec
Description	Optional aluminum mechanical lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LD/JD family 250-600 A (Q155 row)	A	same as above
Kit contents	1 lug; wire range 1 x 500-750 kcmil Al or 1 x 500-600 kcmil Cu	A	same as above
Material	{'value': 'Aluminum', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00270 TA2J630 Siemens lug CURRENT

Siemens TA2J630 lug, SJD6-B 65-200A

OEM part number	TA2J630	A	S117, S118 s6 p. 7-154; JD page; oem_spec
Description	Aluminum-body lug, 1-2 cables	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SJD6-B, SHJD6-B, SCJD6-B 65-200 A	A	same as above
Kit contents	1 lug; wire range 1-2 cables #4 AWG-3/0 Cu or Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00269	TA2J6500	Siemens	lug	CURRENT

Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil

OEM part number	TA2J6500	A	S117, S118 s6 JD/LD pages; s6 p. 7-154; oem_spec
Description	Standard aluminum-body line/load lug for JD and LD frames; six lugs per 3-pole breaker; suffix 'L' = lugs installed	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JXD2(A), JXD6(A), JD6(A), SJD6-B, HJD6(A), HJXD6(A), HHJXD6, HHJD6, SHJD6-B, CJD6, SCJD6-B (200-400 A); LXD6(A), LD6(A), SLD6-B, HLD6(A), HLXD6(A), HHLXD6, HHLD6, SHLD6-B, CLD6, SCLD6-B (250-600 A)	A	same as above
Kit contents	1 lug (6 per 3-pole breaker); wire range 1-2 cables, 3/0-500 kcmil Cu / 4/0-500 kcmil Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00275	TA6JD20	Siemens	lug	CURRENT

Siemens TA6JD20 distribution lug, JD/LD

OEM part number	TA6JD20	A	S117, S118 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JD/LD families 200-600 A, 2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range #14-2/0 AWG Cu / #6-2/0 AWG Al, 6 wires	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00271	TC1J6600	Siemens	lug	CURRENT

Siemens TC1J6600 copper lug, JD/LD (100% rated)

OEM part number	TC1J6600	A	S117, S118 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug; used for 100% rated JD/LD frame breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J(X)D2(A), J(X)D6(A), HJD6(A), HHJD6, SHJD6-B, L(X)D6(A), HHLD6, HLD6(A), SHLD6-B, CJD6, CLD6 200-600 A	A	same as above
Kit contents	1 lug; wire range 1 x 3/0-600 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00272	TC2J6500	Siemens	lug	CURRENT

Siemens TC2J6500 copper lug, JD/LD (100% rated)

OEM part number	TC2J6500	A	S117, S118 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug; used for 100% rated JD/LD	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JD/LD frames 200-600 A	A	same as above
Kit contents	1 lug; wire range 1-2 x 3/0-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00313	**CLRSJL3**	Siemens CLRSJL3 rear-stud shield kit, CJD/SCJD/CLD/SCLD	CJD, SCJD, CLD, SCLD A	current
EDH-SIE-00276	**JDTERMSHIELD**	Siemens JDTERMSHIELD terminal shield, JD/LD 3-pole	JD, LD 3-pole A	current

EDH-SIE-00313	CLRSJL3	Siemens	barrier	CURRENT

Siemens CLRSJL3 rear-stud shield kit, CJD/SCJD/CLD/SCLD

OEM part number	CLRSJL3	A	S117, S118 s6 p. 7-165; oem_spec
Description	Required shield kit to add with rear-connecting studs on CJD, SCJD, CLD, SCLD	A	same as above
Application	accessory	A	same as above
Breaker compatibility	CJD, SCJD, CLD, SCLD	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*What does the CLRSJL3 kit contain?*		

EDH-SIE-00276	JDTERMSHIELD	Siemens	barrier	CURRENT

Siemens JDTERMSHIELD terminal shield, JD/LD 3-pole

OEM part number	JDTERMSHIELD	A	S117, S118 s6 p. 7-160; oem_spec
Description	Terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JD, LD 3-pole	A	same as above
Kit contents	std pkg 1	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00306	**RS5773**	Siemens RS5773 rear-connecting stud, All JD, long 11.20 in	All JD (400 A) A	current
EDH-SIE-00305	**RS5774**	Siemens RS5774 rear-connecting stud, All JD, short 5.85 in	All JD (400 A) A	current

EDH-SIE-00306	RS5773	Siemens	breaker-accessory	CURRENT

Siemens RS5773 rear-connecting stud, All JD, long 11.20 in

OEM part number	RS5773	A	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All JD (400 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 11.20 in	A	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

EDH-SIE-00305	RS5774	Siemens	breaker-accessory	CURRENT

Siemens RS5774 rear-connecting stud, All JD, short 5.85 in

OEM part number	RS5774	A	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All JD (400 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 5.85 in	A	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

Breaker family LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00308	**RS5783**	Siemens RS5783 rear-connecting stud, All LD, long 11.20 in	All LD (600 A) A	current
EDH-SIE-00307	**RS5784**	Siemens RS5784 rear-connecting stud, All LD, short 5.85 in	All LD (600 A) A	current

EDH-SIE-00308	RS5783	Siemens	breaker-accessory	CURRENT

Siemens RS5783 rear-connecting stud, All LD, long 11.20 in

OEM part number	RS5783	A	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All LD (600 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 11.20 in	A	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

EDH-SIE-00307	RS5784	Siemens	breaker-accessory	CURRENT

Siemens RS5784 rear-connecting stud, All LD, short 5.85 in

OEM part number	RS5784	A	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All LD (600 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 5.85 in	A	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

Breaker family MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00281	**2TA2N8750**	Siemens 2TA2N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00283	**2TA3N8750**	Siemens 2TA3N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00285	**2TA4N8500**	Siemens 2TA4N8500 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00287	**2TA4P8500**	Siemens 2TA4P8500 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00282	**3TA2N8750**	Siemens 3TA2N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00284	**3TA3N8750**	Siemens 3TA3N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00286	**3TA4N8500**	Siemens 3TA4N8500 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00288	**3TA4P8500**	Siemens 3TA4P8500 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00290	**CCM800K2**	Siemens CCM800K2 compression lug kit, MD 2-pole	M(X)D6, HM(X)D6, CMD6, SMD6-B, SHMD6-B, SCMD6-B 500-800 A, 2-pole A	current
EDH-SIE-00291	**CCM800K3**	Siemens CCM800K3 compression lug kit, MD 3-pole	MD family 500-800 A, 3-pole A	current
EDH-SIE-00292	**CCN1200K2**	Siemens CCN1200K2 compression lug kit, ND 2-pole	N(X)D6, HN(X)D6, CND6, SND6-B, SHND6-B, SCND6-B 900-1200 A, 2-pole A	current
EDH-SIE-00293	**CCN1200K3**	Siemens CCN1200K3 compression lug kit, ND 3-pole	ND family 900-1200 A, 3-pole A	current

EDH-SIE-00281 **2TA2N8750** Siemens lug-kit **CURRENT**

Siemens 2TA2N8750 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA2N8750	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S117 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-2 cables per lug, 500-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00283 **2TA3N8750** Siemens lug-kit **CURRENT**

Siemens 2TA3N8750 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA3N8750	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S117 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-3 cables per lug, 500-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00285	2TA4N8500	Siemens	lug-kit	CURRENT

Siemens 2TA4N8500 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA4N8500	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S117 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00287	2TA4P8500	Siemens	lug-kit	CURRENT

Siemens 2TA4P8500 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA4P8500	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S117 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00282	3TA2N8750	Siemens	lug-kit	CURRENT

Siemens 3TA2N8750 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA2N8750	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S117 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-2 cables per lug, 500-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00284	3TA3N8750	Siemens	lug-kit	CURRENT

Siemens 3TA3N8750 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA3N8750	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S117 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-3 cables per lug, 500-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00286	3TA4N8500	Siemens	lug-kit	CURRENT

Siemens 3TA4N8500 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA4N8500	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S117 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00288	3TA4P8500	Siemens	lug-kit	CURRENT

Siemens 3TA4P8500 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA4P8500	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S117 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S117, S118 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00290	CCM800K2	Siemens	lug-kit	CURRENT

Siemens CCM800K2 compression lug kit, MD 2-pole

OEM part number	CCM800K2	A	S117, S118 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 2-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M(X)D6, HM(X)D6, CMD6, SMD6-B, SHMD6-B, SCMD6-B 500-800 A, 2-pole	A	same as above
Kit contents	6 lugs; wire range 500 kcmil	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00291	CCM800K3	Siemens	lug-kit	CURRENT

Siemens CCM800K3 compression lug kit, MD 3-pole

OEM part number	CCM800K3	A	S117, S118 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 3-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MD family 500-800 A, 3-pole	A	same as above
Kit contents	9 lugs; wire range 500 kcmil	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00292	CCN1200K2	Siemens	lug-kit	CURRENT

Siemens CCN1200K2 compression lug kit, ND 2-pole

OEM part number	CCN1200K2	A	S117, S118 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 2-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N(X)D6, HN(X)D6, CND6, SND6-B, SHND6-B, SCND6-B 900-1200 A, 2-pole	A	same as above
Kit contents	8 lugs; wire range 500 kcmil	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00293	CCN1200K3	Siemens	lug-kit	CURRENT

Siemens CCN1200K3 compression lug kit, ND 3-pole

OEM part number	CCN1200K3	A	S117, S118 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 3-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ND family 900-1200 A, 3-pole	A	same as above
Kit contents	12 lugs; wire range 500 kcmil	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00277	**TA2K500**	Siemens TA2K500 lug, LMD/MD 500-600A, 1-2 x #1-500	LMD6, LMXD6, HLMD6, HLMXD6 (TA2K500 or TA3K500 only); MD6, MXD6, SMD6- **A**	current
EDH-SIE-00280	**TA2N750**	Siemens TA2N750 lug, MD 500-800A (100% rated), 500-750 kcmil	MD family 500-800 A (100% rated) **A**	current
EDH-SIE-00278	**TA3K500**	Siemens TA3K500 lug, LMD/MD 500-800A, 1-3 x 1/0-500	LMD/MD families; MD 700-800 A **A**	current
EDH-SIE-00279	**TC2K500**	Siemens TC2K500 copper lug, MD 500-600A	SMD6-B, M(X)D6, HM(X)D6, CMD6, SCMD6-B 500-600 A **A**	current

EDH-SIE-00277 TA2K500 Siemens lug CURRENT

Siemens TA2K500 lug, LMD/MD 500-600A, 1-2 x #1-500

OEM part number	TA2K500	**A**	S117, S118 s6 p. 7-154; MD page; oem_spec
Description	Aluminum-body lug	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	LMD6, LMXD6, HLMD6, HLMXD6 (TA2K500 or TA3K500 only); MD6, MXD6, SMD6-B, HMD6, HMXD6, SHMD6-B, CMD6, SCMD6-B 500-600 A	**A**	same as above
Kit contents	1 lug; wire range 1-2 x #1-500 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00280 TA2N750 Siemens lug CURRENT

Siemens TA2N750 lug, MD 500-800A (100% rated), 500-750 kcmil

OEM part number	TA2N750	**A**	S117, S118 s6 p. 7-154; oem_spec
Description	Aluminum-body lug, 1-2 cables; used for 100% rated MD/ND frame breakers	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	MD family 500-800 A (100% rated)	**A**	same as above
Kit contents	1 lug; wire range 1-2 x 500-750 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*What is the relationship between TA2N750 (single, p. 7-154) and the 2TA2N8750/3TA2N8750 kits (MD page, p. 7-155)?*		

EDH-SIE-00278	TA3K500	Siemens	lug	CURRENT

Siemens TA3K500 lug, LMD/MD 500-800A, 1-3 x 1/0-500

OEM part number	TA3K500	A	S117, S118 s6 p. 7-154; MD page; oem_spec
Description	Aluminum-body lug; standard line/load lug on MD/LMD (suffix 'L' = lugs installed)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LMD/MD families; MD 700-800 A	A	same as above
Kit contents	1 lug; wire range 1-3 x 1/0-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00279	TC2K500	Siemens	lug	CURRENT

Siemens TC2K500 copper lug, MD 500-600A

OEM part number	TC2K500	A	S117, S118 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SMD6-B, M(X)D6, HM(X)D6, CMD6, SCMD6-B 500-600 A	A	same as above
Kit contents	1 lug; wire range 1-2 x #1 AWG-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00298	**MDTERMSHIELD**	Siemens MDTERMSHIELD terminal shield, MD/ND/PD/RD 3-pole	MD, ND, PD, RD 3-pole A	current
EDH-SIE-00289	**NDTS**	Siemens NDTS wire lug shield / end barrier, MD/ND	MD6, MXD6, HMD6, HMXD6, CMD6, ND6, NXD6, CND6 families A	current

EDH-SIE-00298	MDTERMSHIELD	Siemens	barrier	CURRENT

Siemens MDTERMSHIELD terminal shield, MD/ND/PD/RD 3-pole

OEM part number	MDTERMSHIELD	A	S117, S118 s6 p. 7-160; oem_spec
Description	Terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MD, ND, PD, RD 3-pole	A	same as above
Kit contents	std pkg 1	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6), Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00289	NDTS	Siemens	barrier	CURRENT

Siemens NDTS wire lug shield / end barrier, MD/ND

OEM part number	NDTS	A	S117, S118 s6 MD/ND pages; s6 p. 7-154; oem_spec
Description	Wire lug shield (NDTS); required when oversized lugs are used; included in the 2TA*/3TA* connector kits as the 'NDTS end barrier'. Breaker length increases to 24 in with lug shields (MD/ND dimension table).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MD6, MXD6, HMD6, HMXD6, CMD6, ND6, NXD6, CND6 families	A	same as above
Dimensions	Breaker overall length 24 in with lug shields vs 16 in without (W 9, D 6, D1 8.25)	A	S117 MD page dimension table; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S117, S118 s6 MD/ND pages; s6 p. 7-154; oem_spec
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Is NDTS orderable on its own, or only as part of the kits?*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00312	**RS5785**	Siemens RS5785 rear-connecting stud, All MD, ND, long 8.00 in	All MD, ND (1200 A) A	current
EDH-SIE-00311	**RS5786**	Siemens RS5786 rear-connecting stud, All MD, ND, short 5.50 in	All MD, ND (1200 A) A	current
EDH-SIE-00310	**RS5787**	Siemens RS5787 rear-connecting stud, LM(X)D6, HLM(X)D6, long 11.20 in	LM(X)D6, HLM(X)D6 (800 A) A	current
EDH-SIE-00309	**RS5788**	Siemens RS5788 rear-connecting stud, LM(X)D6, HLM(X)D6, short 5.85 in	LM(X)D6, HLM(X)D6 (800 A) A	current

EDH-SIE-00312	RS5785	Siemens	breaker-accessory	CURRENT

Siemens RS5785 rear-connecting stud, All MD, ND, long 8.00 in

OEM part number	RS5785	A	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All MD, ND (1200 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 8.00 in	A	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00311	RS5786	Siemens	breaker-accessory	CURRENT

Siemens RS5786 rear-connecting stud, All MD, ND, short 5.50 in

OEM part number	RS5786	A	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All MD, ND (1200 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 5.50 in	A	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00310	RS5787	Siemens	breaker-accessory	CURRENT

Siemens RS5787 rear-connecting stud, LM(X)D6, HLM(X)D6, long 11.20 in

OEM part number	RS5787	A	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LM(X)D6, HLM(X)D6 (800 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 11.20 in	A	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00309	RS5788	Siemens	breaker-accessory	CURRENT

Siemens RS5788 rear-connecting stud, LM(X)D6, HLM(X)D6, short 5.85 in

OEM part number	RS5788	A	S117, S118 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LM(X)D6, HLM(X)D6 (800 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 5.85 in	A	S117 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family NGG / HGG / LGG (G-frame bolt-on/lug)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00248	**3TC1GG20**	Siemens 3TC1GG20 lug pack of 3, NGG/HGG/LGG 35-125A	NGG, HGG, LGG 35-125 A A	current
EDH-SIE-00246	**3TC1Q1**	Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A	NGG, HGG, LGG 15-30 A A	current

EDH-SIE-00248 **3TC1GG20** Siemens lug-kit **CURRENT**

Siemens 3TC1GG20 lug pack of 3, NGG/HGG/LGG 35-125A

OEM part number	3TC1GG20	A	S117, S118 s6 p. 7-153; oem_spec
Description	Pack of 3 lugs	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NGG, HGG, LGG 35-125 A	A	same as above
Kit contents	pkg of 3; wire range #8-#1/0 AWG Cu / #8-#2/0 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Requires	TNKG3 (EDH-SIE-00249)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00246 **3TC1Q1** Siemens lug-kit **CURRENT**

Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A

OEM part number	3TC1Q1	A	S117, S118 s6 p. 7-153; oem_spec
Description	Pack of 3 TC1Q1-type lugs for NGG/HGG/LGG 15-30 A	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NGG, HGG, LGG 15-30 A	A	same as above
Kit contents	pkg of 3; wire range #14-#6 AWG Cu / #12-#6 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Requires	TNKG3 (EDH-SIE-00249)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00250	**TA6GG04**	Siemens TA6GG04 distribution lug, NGG/HGG/LGG	NGG, HGG, LGG 15-125 A, 1/2/3-pole A	current

EDH-SIE-00250 **TA6GG04** Siemens lug **CURRENT**

Siemens TA6GG04 distribution lug, NGG/HGG/LGG

OEM part number	TA6GG04	A	S117, S118 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug; special purpose wire connector, not for general use	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NGG, HGG, LGG 15-125 A, 1/2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range #6-#4 Al / #14-#4 Cu, 6 wires per lug	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00251	**TSSG3A**	Siemens TSSG3A terminal shield, HGG/LGG/NGG 3-pole	HGG, LGG, NGG 3-pole **A**	current

EDH-SIE-00251 **TSSG3A** Siemens barrier **CURRENT**

Siemens TSSG3A terminal shield, HGG/LGG/NGG 3-pole

OEM part number	TSSG3A	**A**	S117, S118 s6 p. 7-160; oem_spec
Description	Terminal shield	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	HGG, LGG, NGG 3-pole	**A**	same as above
Kit contents	std pkg 1	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00249	**TNKG3**	Siemens TNKG3 nut keeper plate (pkg of 3), NGG	NGG, HGG, LGG 15-125 A **A**	current

EDH-SIE-00249 **TNKG3** Siemens hardware-kit **CURRENT**

Siemens TNKG3 nut keeper plate (pkg of 3), NGG

OEM part number	TNKG3	**A**	S117, S118 s6 p. 7-153; oem_spec
Description	Nut keeper plate; one nut keeper plate is required with each lug on the NGG breaker	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	NGG, HGG, LGG 15-125 A	**A**	same as above
Kit contents	pkg of 3	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family QJ2 / QJH2 / QJ2-H / HQJ2H

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00256	**TA1Q300**	Siemens TA1Q300 3-lug kit, QJ2 (distributor data)	QJ breakers (QJ2, QJH2, QJ2H, HQJ2H per a search snippet) **C**	unknown

EDH-SIE-00256 **TA1Q300** Siemens lug-kit **UNKNOWN**

Siemens TA1Q300 3-lug kit, QJ2 (distributor data)

OEM part number	TA1Q300	**C**	S119 distributor
Description	3-lug kit for QJ breakers; accepts Al or Cu, single wire up to 300 kcmil	**C**	same as above
Application	accessory	**C**	same as above
Breaker compatibility	QJ breakers (QJ2, QJH2, QJ2H, HQJ2H per a search snippet)	**C**	same as above
Kit contents	3 lugs; wire range single wire up to 300 kcmil Al/Cu	**C**	same as above
Status	unknown (Not in SPEEDFAX 2017. The QJ2 frame is not in the current catalog.)	**D**	same as above
Cross-links	Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Find an OEM ITE/Siemens table for QJ2 lugs (an older SPEEDFAX of about 1995-2008 or the QJ2 instruction)*		
Open question	*Did TA1Q300 supersede, or is it superseded by, 3TA1QR300?*		

Breaker family QR2 / QRH2 / HQR2 / HQR2H

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00253	**3TA1QR300**	Siemens 3TA1QR300 lug kit (3), QR2 100-250A	QR2, QR2H, HQR2, HQR2H 100-250 A **A**	current
EDH-SIE-00254	**3TC1QR250**	Siemens 3TC1QR250 copper lug kit (3), QR2	QR2, QR2H, HQR2, HQR2H 100-250 A **A**	current

EDH-SIE-00253 **3TA1QR300** Siemens lug-kit **CURRENT**

Siemens 3TA1QR300 lug kit (3), QR2 100-250A

OEM part number	3TA1QR300	**A**	S117, S118 s6 p. 7-40; s6 p. 7-154; oem_spec
Description	Aluminum-body lugs, 3 per kit; load-side lugs mounted and included with QR2 (line+load with suffix 'L')	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	QR2, QR2H, HQR2, HQR2H 100-250 A	**A**	same as above
Kit contents	3 lugs; wire range #3-300 kcmil Al/Cu	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00254 **3TC1QR250** Siemens lug-kit **CURRENT**

Siemens 3TC1QR250 copper lug kit (3), QR2

OEM part number	3TC1QR250	**A**	S117, S118 s6 p. 7-40; s6 p. 7-155; oem_spec
Alternate / superseded numbers	3TC1QR2520 (Printed '3TC1QR2520' on p. 7-155 but '3TC1QR250' on p. 7-40. It may be a footnote run-in or a typo.)	**B**	S117 alias; s6 p. 7-155; oem_spec
Description	Optional copper lugs, 3 per kit	**A**	S117, S118 s6 p. 7-40; s6 p. 7-155; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	QR2, QR2H, HQR2, HQR2H 100-250 A	**A**	same as above
Kit contents	3 lugs; wire range #3-300 kcmil Cu only	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Which is the correct orderable number, 3TC1QR250 or 3TC1QR2520?*		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00255	**CCQ250**	Siemens CCQ250 compression lug, QR2	QR2, QR2H, HQR2, HQR2H 100-250 A, 2-3 pole **A**	current

EDH-SIE-00255	CCQ250	Siemens	lug	CURRENT

Siemens CCQ250 compression lug, QR2

OEM part number	CCQ250	A	S117, S118 s6 p. 7-155; oem_spec
Description	Compression lug (lug and necessary hardware per kit)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QR2, QR2H, HQR2, HQR2H 100-250 A, 2-3 pole	A	same as above
Kit contents	1 lug per kit; wire range #6-350 kcmil Al/Cu	A	same as above
Material	{'value': 'Compression (CMP)', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 'p. 7-40'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker family Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00297	**TA4P750**	Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)	P(X)D6, HP(X)D6, CPD6, SPD6-B, SHPD6-B 1200-1600 A **A**	current
EDH-SIE-00294	**TA5P600**	Siemens TA5P600 lug, PD 1200-1600A, 1-5 x 300-600 kcmil	PD6, HPD6, CPD6, PXD6, HPXD6, SPD6-B, SHPD6-B 1200-1600 A **A**	current
EDH-SIE-00295	**TA6R600**	Siemens TA6R600 lug, PD/RD 1200-2000A, 1-6 x 300-600 kcmil	PD6, PXD6, HPD6, HPXD6, SPD6-B, SHPD6-B, RD6, RXD6, HRD6, HRXD6 1200-2 **A**	current

EDH-SIE-00297	TA4P750	Siemens	lug	CURRENT

Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)

OEM part number	TA4P750	A	S117, S118 s6 p. 7-155; oem_spec
Description	Optional aluminum lug, built to order (6-8 weeks)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	P(X)D6, HP(X)D6, CPD6, SPD6-B, SHPD6-B 1200-1600 A	A	same as above
Kit contents	1 lug; wire range 1-4 x 600-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00294	TA5P600	Siemens	lug	CURRENT

Siemens TA5P600 lug, PD 1200-1600A, 1-5 x 300-600 kcmil

OEM part number	TA5P600	A	S117, S118 s6 p. 7-154; PD page; oem_spec
Description	Aluminum-body lug; standard PD frame lug, 6 required per breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PD6, HPD6, CPD6, PXD6, HPXD6, SPD6-B, SHPD6-B 1200-1600 A	A	same as above
Kit contents	1 lug (6 required); wire range 1-5 x 300-600 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00295	TA6R600	Siemens	lug	CURRENT

Siemens TA6R600 lug, PD/RD 1200-2000A, 1-6 x 300-600 kcmil

OEM part number	TA6R600	A	S117, S118 s6 p. 7-154; oem_spec
Description	Aluminum-body lug, 1-6 cables	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PD6, PXD6, HPD6, HPXD6, SPD6-B, SHPD6-B, RD6, RXD6, HRD6, HRXD6 1200-2000 A	A	same as above
Kit contents	1 lug; wire range 1-6 x 300-600 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6), Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker family Sentron RD (RD6, RXD6, HRD6, HRXD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00296	**TC5R600**	Siemens TC5R600 copper lug, RD 1600-2000A (also 100% PD)	R(X)D6, HR(X)D6 1600-2000 A; 100% rated PXD6/HPXD6 A	current

EDH-SIE-00296	TC5R600	Siemens	lug	CURRENT

Siemens TC5R600 copper lug, RD 1600-2000A (also 100% PD)

OEM part number	TC5R600	A	S117, S118 s6 p. 7-155; PD page; oem_spec
Description	Copper mechanical lug; standard RD frame lug; required for 100% rated PD breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	R(X)D6, HR(X)D6 1600-2000 A; 100% rated PXD6/HPXD6	A	same as above
Kit contents	1 lug (6 per breaker); wire range 1-5 x 300-600 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron RD (RD6, RXD6, HRD6, HRXD6), Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

7 Breaker Family Register

Breaker families referenced by the hardware entries. Mounting style and frame determine which connector and mounting kits apply.

BAB BRK-EAT-030 · Eaton lineage · aka BA, BAB, BAB-C, BAB-D, BABRP, BABRSP, HQP, QBCAF, QBGF, QBGFEP, QBH, QBHCAF, QBHGF, QBHGFEP, QBHW, QHPX, QPGF, QPGFEP, QPHGF, QPHGFEP, QPHW

Mounting	Bolt-on 1 in per pole; mounted on PRL1/PRL3 subchassis; KPRL1BAB connectors mount up to 12 poles	A	S39 p. 3; oem_spec
	Bolt-on (horizontal on PRL1a/1X branch connector assemblies; 100 A BAB/QBH mains also horizontal)	A	S57 p.22.1-1; oem_spec
	Plug-on (2C11642 connector assemblies)	A	S52 p.9; oem_spec
Breaker frame	QUICKLAG 1 in per pole	C	S57 inference
Poles	1, 2, 3	A	S57 oem_spec
Ampere range	15-100 A	A	S57 Table 22.1-2; oem_spec
Voltage rating	120/240 Vac	A	S57 oem_spec
Interrupting ratings	BAB 10 kA; QBHW 22 kA at 240 Vac	A	S57 Table 22.1-2; oem_spec
	HQP 10 kA; QPHW 22 kA	A	same as above
Status	Current	B	S56, S57 oem_spec
Replacement / successor	B10B/W10B/NQB BA -> BAB; NPLAB/NQP/Q10P/W10P QP -> HQP; W22B/Q22B QBH -> QBHW; W22P/Q22P QPH -> QPHW	A	S38 p. V12-T4-7; oem_spec
Used in	PRL1/PRL2, PRL3, NLAB, PRL1A, PRL3A, PRL1X, PRL3X		

BR BRK-EAT-032 · Eaton lineage · aka BW, BWH, BD, BQ, BQC

Mounting	1 in plug-on Type BR loadcenter breakers	A	S46 p. V12-T5-14; oem_spec
Used in	BR		

CA BRK-EAT-022 · Eaton lineage · aka CA, CAH, HCA

Mounting	Bolt-on	A	S55 oem_spec
Breaker frame	225 A frame	A	same as above
Poles	2, 3	A	same as above
Ampere range	100-225 A, 240 V; not recommended for motor loads	A	S39 p. 11 Table 15; oem_spec
	100-225 A	A	S55 oem_spec
Voltage rating	240 Vac	A	same as above
Interrupting ratings	CA 10, CAH 22, HCA 42 kA	A	S55 p.11; oem_spec
Status	Legacy; not recommended for motor loads	A	S55 oem_spec
dimensions_3p	W 4.13 x H 6.50 x D 2.69 in; frame obsolete	A	S38 p. V12-T3-10; oem_spec
Used in	CDP, PRL3, PRL4, PRL3A		

Current-limiting FCL / LCL (and FDB+LFB) BRK-EAT-034 · Eaton lineage · aka FCL, LCL, LFB

Mounting	Bolt-on	A	S55 oem_spec
Breaker frame	FCL 100 A, LCL 400 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	FCL 15-100, LCL 125-400 A	A	same as above
Voltage rating	LCL 480 Vac	A	same as above
Interrupting ratings	LCL 200 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL3A, PRL4, CDP		

DA BRK-EAT-009 · Eaton lineage · aka Westinghouse DA

Ampere range	250-400 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	Series C DK (KCDPDK)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

E BRK-EAT-017 · Eaton lineage · aka EA, EH, Westinghouse E-frame

Status	out of production; last manufactured 1974	A	S38 p. V12-T3-10; oem_spec
dimensions_3p	E/EA: W 4.13 x H 6.00 x D 3.38 in; EH: W 4.13 x H 6.50 x D 3.38 in	A	same as above
Replacement / successor	Panelboard-only replacement breakers RE/REA (obsolete) -> REH (3-pole only)	A	S38 p. V12-T3-81; oem_spec
Used in	CDP, NAB		

EB BRK-EAT-001 · Eaton lineage · aka DA, EB, EHB, FB, HFB, HKA, HKB, HLA, HLB, HLC, HMA, HNB, HNC, JA, JB, KA, KB, LA, LB, LBB, LC, MA, MC, NB, NC, Westinghouse EB

Mounting	Bolt-on to CDP chassis connectors	A	S55 oem_spec
Breaker frame	Various	A	same as above
Ampere range	15-100 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
	15-1200 A	A	S55 p.13 Table 18; oem_spec
Status	Still manufactured as a 'replacement circuit breaker' for exact replacement (frame listed obsolete; see cross-reference)	A	S38 p. V12-T3-10 note 1; oem_spec
	Obsolete; Eaton cross-references each to a Series C retrofit kit using same X space	A	S55 p.13; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in (3-pole)	A	S38 p. V12-T3-10; oem_spec
Replacement / successor	Series C EHD; CDP retrofit kit KCDPEHD; same X space	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

ED BRK-EAT-021 · Eaton lineage · aka ED, EDB, EDC, EDH, EDS

Mounting	Bolt-on; single mount 175-225 A in PRL3a	A	S52 oem_spec
Breaker frame	225 A frame	A	S57 oem_spec
Poles	2, 3	A	S55 oem_spec
Ampere range	100-225 A (EDC 15-225 A); 240 V max	A	S39 p. 11 Table 15; oem_spec
	100-225 A	A	S55 oem_spec
Voltage rating	240 Vac	A	same as above
Interrupting ratings	ED 65, EDH 100, EDC 200, EDB 22, EDS 42 kA @240 V	A	S55, S57 oem_spec
Status	Legacy	C	 inference
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S38 p. V12-T3-10; oem_spec
Used in	PRLC, CDP, PRL3, PRL4, PRL1A, PRL2A, PRL3A		

EHB BRK-EAT-002 · Eaton lineage · aka Westinghouse EHB

Ampere range	15-100 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured; frame obsolete	A	S38 p. V12-T3-10; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	same as above
Replacement / successor	Series C EHD (KCDPEHD)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

EHD BRK-EAT-019 · Eaton lineage · aka EHD, FD, FD/LFD, FDB, FDC, FDCE, FDE, HFD, HFDE, LFD

Mounting	Bolt-on to panel connectors	A	S52 oem_spec
Breaker frame	100 A frame (E-frame Series C)	A	S39 p. 11 Table 15; oem_spec
	F-frame 100/150/225 A	A	S57 oem_spec
Poles	1, 2, 3	A	same as above
Ampere range	15-100 A	A	S39 p. 11 Table 15; oem_spec
	15-225 A	A	S57 oem_spec
Voltage rating	FD/HFD/FDC 600 Vac; EHD 480 Vac; FDB 600 Vac	A	S55 p.11 Table 15; oem_spec
Interrupting ratings	1P 277 V 14 kA; 2/3P 240 V 18 kA, 480 V 14 kA	A	S39 p. 11 Table 15; oem_spec
	EHD 18/14 kA; FD 65/25(35)/18; HFD 100/65/25; FDC 200/100/35 kA (240/480/600)	A	S55, S57 oem_spec
Status	Series C legacy; replaced in Xpert panels by Power Defense PDG2	B	S52, S56 inference
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S38 p. V12-T3-10; oem_spec
Used in	PRLC, CDP, PRL3, PRL4, PRL1A, PRL2A, PRL3A, PRL5P		

F BRK-EAT-018 · Eaton lineage · aka FA, HF, HFA, Westinghouse F-frame

Status	out of production; last manufactured 1974	A	S38 p. V12-T3-10; oem_spec
dimensions_3p	F/HF: W 4.13 x H 9.38 x D 4.06 in; FA/HFA: W 4.13 x H 6.50 x D 3.38 in	A	same as above
Replacement / successor	RHF (F/HF), RHFA (FA/HFA), three-pole only	A	S38 p. V12-T3-81; V12-T4-4; oem_spec
Used in	CDP, NAB		

FB BRK-EAT-003 · Eaton lineage · aka Westinghouse FB

Ampere range	15-150 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured; frame obsolete	A	S38 p. V12-T3-10, p. V12-T3-11; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S38 p. V12-T3-11; oem_spec
Replacement / successor	Series C FDB (KCDPFDB); PRL4B replacement FDB	A	S39, S38 RP01400002E p. 13 Table 18; V12-T4-4; oem_spec
Used in	CDP, WEB, WF/WRP		

FD BRK-EAT-020 · Eaton lineage · aka FDB, HFD, FDC, FD-frame

Breaker frame	225 A F-frame Series C (FDB 15-225, FD/HFD/FDC 15-225)	A	S39 p. 11 Table 15; oem_spec
Interrupting ratings	FDB 480 V 14 kA; FD 25 kA; HFD 65 kA; FDC 100 kA at 480 V	A	same as above
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S38 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

GB BRK-EAT-031 · Eaton lineage · aka GB, GHB, GHBGFEP, GHBS, GHQ, GHQRSP, HGHB

Mounting	Bolt-on; PRL2 subchassis via KPRL2GHB; GB/GHB cannot be mixed on same subchassis as BAB/QBH	A	S39 p. 3; V12-T4-16 note 3; oem_spec
	Bolt-on	A	S57 oem_spec
Poles	1, 2, 3	A	same as above
Ampere range	15-100 A	A	S57 Table 22.2-2; oem_spec
Voltage rating	277 V 1-pole, 480Y/277 Vac multi-pole; 125/250 Vdc	A	S57 oem_spec
Interrupting ratings	GHB 65 kA @240, 14 kA @480Y/277; HGHB 25 kA @277	A	same as above
Status	Current	B	S56, S57 oem_spec
Used in	PRL1/PRL2, PRL3, PRL2A, PRL3A, PRL2X, PRL3X		

HFB BRK-EAT-004 · Eaton lineage · aka Westinghouse HFB

Ampere range	15-150 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured	A	S38 p. V12-T3-10; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S38 p. V12-T3-11; oem_spec
Replacement / successor	Series C FD (KCDPFD)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

JA BRK-EAT-007 · Eaton lineage · aka Westinghouse JA

Ampere range	70-225 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	Series C KDB (KCDPKDB); when upgrading JA to Series C K-frame in panelboard, order TAD3 spacer kit	A	S39, S38 RP01400002E p. 13 Table 18; Vol12 Tab 3 JA note; oem_spec
Used in	CDP		

JB BRK-EAT-008 · Eaton lineage · aka Westinghouse JB

Ampere range	70-250 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 4.13 x H 10.00 x D 4.06 in	A	same as above
Replacement / successor	Series C JDB (KCDPJDB)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

JD BRK-EAT-023 · Eaton lineage · aka HJD, HJDDC, JD, JDB, JDC

Mounting	Bolt-on	A	S52 oem_spec
Breaker frame	250 A frame	A	S55 oem_spec
Poles	2, 3	A	same as above
Ampere range	70-250 A	A	S39, S55 p. 11; oem_spec
Voltage rating	600 Vac	A	S55 oem_spec
Interrupting ratings	JD 65/35/18; HJD 100/65/25; JDC 200/100/35 kA	A	same as above
Status	Legacy	C	inference
dimensions_3p	W 4.13 x H 10.00 x D 4.06 in	A	S38 p. V12-T3-11; oem_spec
Used in	PRLC, CDP, PRL4, PRL1A, PRL2A, PRL3A		

KA BRK-EAT-005 · Eaton lineage · aka HKA, Westinghouse KA

Ampere range	70-225 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-11 note 2; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	S38 p. V12-T3-11; oem_spec
Replacement / successor	KA -> KD (KCDPKD); HKA -> HKD (KCDPHKD)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

KB BRK-EAT-006 · Eaton lineage · aka HKB, Westinghouse KB

Ampere range	70-250 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 4.13 x H 10.00 x D 4.06 in	A	same as above
Replacement / successor	Series C JD (KCDPJD)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

KD BRK-EAT-024 · Eaton lineage · aka CHKD, CKD, CKDC, DK, HKD, KD, KDB, KDC

Mounting	Bolt-on	A	S52 oem_spec
Breaker frame	400 A frame	A	S55 oem_spec
Poles	2, 3	A	same as above
Ampere range	KD/KDB/HKD/KDC 100-400 A; DK 250-400 A 240 V	A	S39 p. 11; oem_spec
	100-400 A (DK 250-400)	A	S55 oem_spec
Voltage rating	600 Vac (DK 240 Vac)	A	same as above
Interrupting ratings	KD 65/35/25; HKD 100/65/35; KDC 200/100/50 kA	A	same as above
Status	Legacy	C	inference
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	S38 p. V12-T3-11; oem_spec
adapter	Requires TAD3 adapter/spacer kit when mounted onto existing LB-frame connectors or when upgrading HLB/LBB/JA in a panelboard	A	S39, S38 RP01400002E p. 13; V12-T3-11 note 1; oem_spec
Used in	PRLC, CDP, PRL4, PRL1A, PRL2A, PRL3A		

LA BRK-EAT-010 · Eaton lineage · aka HLA, LAB, Westinghouse LA

Ampere range	250-600 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame (HLA still in panelboard-only list)	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 8.25 x H 10.75 x D 4.06 in	A	same as above
Replacement / successor	Series C LD (KCDPLD); LAB -> LDB	A	S39, S38 RP01400002E p. 13 Table 18; V12-T4-4; oem_spec
Used in	CDP		

LB BRK-EAT-011 · Eaton lineage · aka LBB, HLB, Westinghouse LB

Ampere range	LB 70-400 A; LBB/HLB 125-400 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	LB/HLB -> KD (KCDPKD); LBB -> KDB (KCDPKDB); Series C K-family requires TAD3 adapter kit when mounting on existing LB connectors	A	S39 RP01400002E p. 13 Table 18 and note; oem_spec
Used in	CDP		

LC BRK-EAT-012 · Eaton lineage · aka CHLD, CLD, CLDC, HLC, HLCC, HLD, LC, LCC, LCY, LD, LDB, LDC, Westinghouse LC

Mounting	Bolt-on	A	S52 oem_spec
Breaker frame	600 A frame	A	S55 oem_spec
Poles	2, 3	A	same as above
Ampere range	300-600 A	A	S39, S55 RP01400002E p. 13 Table 18; oem_spec
Voltage rating	600 Vac	A	S55 oem_spec
Interrupting ratings	LD 65/35/25; HLD 100/65/35; LDC 200/100/50 kA	A	same as above
Status	replacement breaker still manufactured (LC obsolete per note 2)	A	S38 p. V12-T3-11; oem_spec
	Legacy	C	inference
dimensions_3p	W 8.25 x H 10.75 x D 4.06 in	A	S38 p. V12-T3-11; oem_spec
Replacement / successor	Series C LD (KCDPLD)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, PRL4, PRL3A		

LD BRK-EAT-025 · Eaton lineage · aka HLD, LDC, LDB, CLD

Ampere range	300-600 A	A	S39 p. 11; oem_spec
dimensions_3p	W 8.25 x H 10.75 x D 4.06 in	A	S38 p. V12-T3-11; oem_spec
Used in	CDP, PRLC, PRL4		

MA BRK-EAT-013 · Eaton lineage · aka CHMDL, CMDL, HMA, HMC, HMCC, HMDL, MA, MC, MCC, MCY, MDL, MDS, MDSC, Westinghouse MA

Mounting	Bolt-on single mount	A	S52 oem_spec
Breaker frame	800 A frame	A	S55 oem_spec
Poles	2, 3	A	same as above
Ampere range	125-800 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
	300-800 A	A	S55 oem_spec
Voltage rating	600 Vac	A	same as above
Interrupting ratings	MDL 65/50/25; HMDL 100/65/35 kA	A	same as above
Status	MA obsolete; HMA replacement breaker	A	S38 p. V12-T3-12; oem_spec
	Legacy	C	inference
dimensions_3p	W 8.25 x H 16.00 x D 4.06 in	A	S38 p. V12-T3-12; oem_spec
Replacement / successor	Series C MDL (KCDPMDL)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, PRL4, PRL5P		

MC BRK-EAT-014 · Eaton lineage · aka HMC, MCC, Westinghouse MC

Ampere range	400-800 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-12; oem_spec
Replacement / successor	Series C MDL (KCDPMDL)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

MDL BRK-EAT-026 · Eaton lineage · aka HMDL, CMDL

Ampere range	300-800 A	A	S39 p. 11; oem_spec
dimensions_3p	W 8.25 x H 16.00 x D 4.06 in	A	S38 p. V12-T3-12; oem_spec
Used in	CDP, PRLC, PRL4		

NB BRK-EAT-015 · Eaton lineage · aka CHND, CND, CNDC, HNB, HNC, HND, NB, NC, NCY, ND, NDC, NGC, NGH, NGS, NHH, Westinghouse NB

Mounting	Bolt-on single mount	A	S52 oem_spec
Breaker frame	1200 A frame	A	S55 oem_spec
Poles	2, 3	A	same as above
Ampere range	700-1200 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
	600-1200 A	A	S55 oem_spec
Voltage rating	600 Vac	A	same as above
Interrupting ratings	ND 65/35/25; HND 100/65/35; NDC 200/100/50 kA	A	same as above
Status	obsolete frame	A	S38 p. V12-T3-12; oem_spec
	Legacy	C	inference
dimensions_3p	W 8.25 x H 16.00 x D 5.50 in	A	S38 p. V12-T3-12; oem_spec
Replacement / successor	Series C ND (KCDPND)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, PRL4, PRL5P		

NC BRK-EAT-016 · Eaton lineage · aka HNC, Westinghouse NC

Ampere range	600-1200 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-12; oem_spec
Replacement / successor	Series C ND (KCDPND)	A	S39 RP01400002E p. 13 Table 18; oem_spec
box_depth	In MP40 panels only NC/HNC require 11.38 in deep box (standard 10.50 in)	A	S38 p. V12-T4-12 note 3; oem_spec
Used in	CDP		

ND BRK-EAT-027 · Eaton lineage · aka HND, NDC, CND

Ampere range	600-1200 A	A	S39 p. 11; oem_spec
dimensions_3p	W 8.25 x H 16.00 x D 5.50 in	A	S38 p. V12-T3-12; oem_spec

Used in	CDP, PRLC, PRL4		

Power Defense frame 2 (PDG2 / PDD2) BRK-EAT-035 · Eaton lineage · aka PDG2, PD2, PG2, PDG2xF, PDG2xG, PDG2xM, PDG2xP, PDD2xG

Mounting	Bolt-on	A	S52 oem_spec
Breaker frame	225 A frame	A	same as above
Poles	1, 2, 3	A	same as above
Ampere range	15-225 A	A	S56 oem_spec
Voltage rating	600 Vac class	C	S56 inference
Status	Current	A	S56 oem_spec
Used in	PRL1X, PRL2X, PRL3X, PRL4X		

Power Defense frame 3 (PDG3 / PDF3 / PDD3) BRK-EAT-036 · Eaton lineage · aka PDG3, PD3, PG3, PF3, PDG3A, PDG3B, PDF3

Mounting	Bolt-on	A	S52 oem_spec
Breaker frame	400 A and 600 A frames	A	S52 p.32 Table 46; oem_spec
Poles	3	A	S52 oem_spec
Ampere range	up to 600 A	A	same as above
Status	Current	A	S56 oem_spec
Used in	PRL1X, PRL2X, PRL3X, PRL4X		

Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5) BRK-EAT-037 · Eaton lineage · aka PDG4, PDG5, PG4, PF4, PG5, PF5

Mounting	Bolt-on single mount	A	S52 oem_spec
Breaker frame	800 A (4) / 1200 A (5)	A	S52 p.34 Table 49; oem_spec
Poles	3	A	S52 oem_spec
Ampere range	300-1200 A	A	same as above
Status	Current	A	S56 oem_spec
Used in	PRL4X		

RD BRK-EAT-028 · Eaton lineage · aka RG

Ampere range	1600/2000/2500 A	A	S38 p. V12-T3-12; oem_spec
dimensions_3p	W 15.50 x H 16.00 x D 9.75 in	A	same as above
Replacement / successor	RD replaces PC, PCC and PB breakers for 2000 and 2500 A only	A	S38 p. V12-T3-12 note 1; oem_spec
Used in	PRLC, WF/WRP		

Series G E-frame (EGB/EGS/EGH) BRK-EAT-038 · Eaton lineage · aka EGB, EGS, EGH, EGE

Mounting	Bolt-on	A	S57 oem_spec
Breaker frame	125 A frame	A	same as above
Poles	1, 2, 3	A	same as above
Ampere range	15-125 A	A	same as above
Voltage rating	480 Vac	A	same as above
Interrupting ratings	EGB 25/18; EGS 85/35; EGH 100/65 kA (240/480)	A	S57 Table 22.3-9; oem_spec
Status	Current	C	inference
Used in	PRL3E		

Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH BRK-EAT-033 · Eaton lineage · aka LGE, LGS, LGH, LGC, LGU, LHH

Mounting	Bolt-on	A	S52 oem_spec
Breaker frame	600 A frame (LHH 400 A)	A	S57 oem_spec
Poles	3	A	S52 oem_spec
Ampere range	up to 600 A	A	S57 oem_spec
Voltage rating	600 Vac	A	same as above
Interrupting ratings	LGE 65/35/18; LGH 100/65/35; LGC/LGU 200 kA @240	A	same as above
Status	Current/legacy	C	inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, PRL4X		

Tri-Pac BRK-EAT-029 · Eaton lineage · aka FB-P, LA-P, NB-P, TRI-PAC

Mounting	Bolt-on	A	S55 oem_spec
Breaker frame	FB-P 100 A, LA-P 400 A, NB-P 800 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	FB-P 15-100 A; LA-P 70-400 A; NB-P 300-800 A; 200 kA at 600 V	A	S39 p. 11 Table 15; oem_spec
	15-800 A	A	S55 oem_spec
Voltage rating	600 Vac	A	same as above
Interrupting ratings	200 kA	A	S55 p.11; oem_spec
Status	Legacy	C	inference
Used in	CDP, PRL4, PRL3A		

E150 line (TEB, TED, THED, TEC) BRK-GEA-017 · GE / ABB lineage · aka E-150, E150, TEB, TED, THED, TEC, THLC1, TB1

Breaker frame	E150 (150 A)	A	S112 p. 6-34 and 6-102; oem_spec
Ampere range	10-150 A	A	same as above

F225 line (TFJ, TFK, THFK, TFC) BRK-GEA-018 · GE / ABB lineage · aka F225, TFJ, TFK, THFK, TFC, THLC2

Breaker frame	F225 (225/250 A)	A	S112 p. 6-101 to 6-102; oem_spec

J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) BRK-GEA-019 · GE / ABB lineage · aka J400, J600, TJJ, TJK, THJK, TJD, TJC, TB4, TLB4, THLC4

Breaker frame	J400 / J600	A	S112 p. 6-36 to 6-37 and 6-102; oem_spec
Ampere range	200-600 A	A	same as above

K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) BRK-GEA-020 · GE / ABB lineage · aka K1200, TKM, TKMA, THKMA, TK4V, TB6, TB8

Breaker frame	K1200	A	S112, S114 p. 6-102; oem_spec
Ampere range	300-1200 A	A	same as above

Record Plus FB (FBV/FBN/FBH/FBL) BRK-GEA-010 · GE / ABB lineage · aka FB

Mounting	bolt-on	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, RG-NEXT		

Record Plus FB 100 BRK-GEA-025 · GE / ABB lineage · aka FB100, FBN, FBV, FBH

Breaker frame	FB 100	A	S112 p. 6-68 to 6-73; oem_spec
Ampere range	15-100 A	A	same as above

Record Plus FC (FCS/FCV/FCN/FCH/FCL) BRK-GEA-011 · GE / ABB lineage · aka FC, FD

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	up to 100 A	A	same as above
Used in	SPECTRA-PP		

Record Plus FC 100 BRK-GEA-026 · GE / ABB lineage · aka FC100

Breaker frame	FC 100	A	S112 p. 6-74 to 6-78; oem_spec
Ampere range	15-100 A	A	same as above

Record Plus FE 250 BRK-GEA-027 · GE / ABB lineage · aka FE250

Breaker frame	FE 250	A	S112 p. 6-79 to 6-81; oem_spec
Ampere range	25-250 A	A	same as above

Record Plus FG (FGV/FGN/FGH/FGL/FGP) BRK-GEA-012 · GE / ABB lineage · aka FG

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	up to 600 A	A	same as above
Used in	SPECTRA-PP		

Record Plus FG 600 BRK-GEA-028 · GE / ABB lineage · aka FG600

Breaker frame	FG 600	A	S112 p. 6-83 to 6-88; oem_spec
Ampere range	100-600 A	A	same as above

Spectra RMS SE150 BRK-GEA-021 · GE / ABB lineage · aka SE150, SED, SEH, SEL, SEP, SE1

Breaker frame	SE150	A	S112 p. 6-44, 6-103; oem_spec
Ampere range	15-150 A	A	same as above

Spectra RMS SF250 BRK-GEA-022 · GE / ABB lineage · aka SF250, SFH, SFL, SFP

Breaker frame	SF250	A	S112 p. 6-46, 6-103; oem_spec
Ampere range	70-250 A	A	same as above

Spectra RMS SG600 BRK-GEA-023 · GE / ABB lineage · aka SG600, SG400, SGD, SGH, SGL, SGP

Breaker frame	SG600 (400/600 A)	A	S112 p. 6-48, 6-103; oem_spec
Ampere range	125-600 A	A	same as above

Spectra RMS SK1200 BRK-GEA-024 · GE / ABB lineage · aka SK1200, SK800, SKH, SKL, SKP, SKD

Breaker frame	SK1200	A	S112 p. 6-51, 6-103; oem_spec
Ampere range	300-1200 A	A	same as above

Spectra SE (SEDA/SEHA/SELA/SEPA) BRK-GEA-006 · GE / ABB lineage · aka SE-frame, Spectra RMS E

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	up to 150 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP		

Spectra SF (SFHA/SFLA/SFPA) BRK-GEA-007 · GE / ABB lineage · aka SF-frame

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	70-250 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR		

Spectra SG (SGDA/SGHA/SGLA/SGPA) BRK-GEA-008 · GE / ABB lineage · aka SG-frame

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	125-600 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, SCP-PLUS		

Spectra SK (SKHA/SKLA/SKPA) BRK-GEA-009 · GE / ABB lineage · aka SK-frame, K

Mounting	single-mounted / center-mounted	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	800-1200 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, SCP-PLUS, CCB-QMR		

TEB / TED / THED / TED4 / TED6 BRK-GEA-005 · GE / ABB lineage · aka E-frame, EB

Mounting	bolt-on	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	15-150 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR, NHB		

TEY / TEYF / TEYD / TEYH / TEYL BRK-GEA-003 · GE / ABB lineage · aka E-frame TEY, EY

Mounting	bolt-on (AE/AEP; Spectra double-branch; ReliaGear neXT)	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A (110/125 A TEYD/H/L in AS)	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, RG-NEXT		

TFJ / TFK / THFK / TFL BRK-GEA-013 · GE / ABB lineage · aka F-frame, FJ

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	up to 225 A	A	same as above

Used in	A-SERIES, SPECTRA-PP, CCB-QMR		

THQB / THHQB / TXQB BRK-GEA-001 · GE / ABB lineage · aka Q-line bolt-on, QB

Mounting	bolt-on (A-Series AQ; Spectra double-branch)	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A, 1-3P	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP		

THQL / THHQL / TXQL BRK-GEA-002 · GE / ABB lineage · aka Q-line plug-in

Mounting	plug-in (A-Series AL)	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A	A	same as above
Used in	A-SERIES		

TJD / TJJ / TJK / THJK BRK-GEA-014 · GE / ABB lineage · aka J-frame, JK

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	250-600 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, SCP-PLUS, CCB-QMR		

TKM / THKM BRK-GEA-015 · GE / ABB lineage · aka K-frame, KM

Mounting	single-mounted	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	800-1200 A	A	same as above
Used in	SPECTRA-PP, CCB-QMR		

TQD / THQD BRK-GEA-004 · GE / ABB lineage · aka Q-frame QD

Mounting	bolt-on via strap kits / branch bases	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	100-225 A, 2-3P	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR		

TQD / THQD (Q-Line 225A) BRK-GEA-016 · GE / ABB lineage · aka TQD, THQD, TQC 70-100A

Breaker frame	Q-Line 225 A	A	S112 p. 6-102; oem_spec

3VA41 BRK-SIE-004 · Siemens lineage · aka 3VA41

Breaker frame	1in per pole (1-pole 1in wide; 2P 2in; 3P 3in)	A	S1 pp.11-18, 11-19; oem_spec
Ampere range	15-125A	A	S1 p.11-18; oem_spec
Interrupting ratings	SEAB/MEAB/HEAB: 25/35/65kA @277V-480Y/277V	A	S1 pp.11-18, 11-19; oem_spec
Used in	RP1, P2, P3, P4, P5, SB		

3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)

BRK-SIE-012 · Siemens lineage · aka 3VA52, 3VA53, 3VA54, 3VA61, 3VA62, 3VA63, 3VA64

Used in	RP1, P2, P3, P4, P5, SB		

BL BRK-SIE-001 · Siemens lineage · aka BAF, BL, BLE, BLF, BLH, BQ, BQE, BQF, BQH, BQHF, BQXD, BT twin (B1515/B2020), HBL, HBQ

Mounting	bolt-on	A	S1 p.11-16; oem_spec
Breaker frame	1in per pole bolt-on	A	same as above
Ampere range	15-100A	A	same as above
	15-125 A	A	S117 p. 7-39, 7-153; oem_spec
Voltage rating	120/240V	A	S1 p.11-16; oem_spec
Interrupting ratings	BL 10kA, BLH 22kA, HBL 65kA	A	same as above
Used in	RP1, P1, S1/S2, P2, P3, P4, P5, SB		

BQ / BQH / HBQ (bolt-on, legacy) BRK-SIE-015 · Siemens lineage · aka BQ, BQH, HBQ, HB

Status	unknown	D	S1 inference
Used in	CDP6, SB		

BQD BRK-SIE-002 · Siemens lineage · aka BQD, BQD6, CQD, CQD6

Mounting	bolt-on, 1in per pole	A	S1 p.11-16; oem_spec
Ampere range	15-100A	A	S1, S117 p.11-16; oem_spec
Voltage rating	480Y/277V	A	S1 p.11-16; oem_spec
Interrupting ratings	14kA @480Y/277V, 65kA @240V	A	same as above
note	SPEEDFAX p. 7-153 says the lugs are integral (line and load for BQD; line side for CQD/CQD6, load side for both). No separate lug kit is listed.	A	S117 p. 7-153; oem_spec
Used in	RP1, P1, P2, P3, P4, P5, SB		

ED (ED2/ED4/ED6/HED4/HHED6) and CED6 BRK-SIE-005 · Siemens lineage · aka CED6, E2, E4, E6, ED, ED2, ED4, ED6, HE4, HE6, HED4, HED6, HHED6

Ampere range	15-125A	A	S1, S117 p.11-94; oem_spec
Used in	RP1, P1, S1/S2, P2, P4, P5, SB, CDP6		

FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) BRK-SIE-008 · Siemens lineage · aka CFD6, FD6, FXD6, HFD6, HFXD6, HHFD6, HHFXD6

Ampere range	70-250A	A	S1, S117 p.11-94; oem_spec
Used in	RP1, P1, S1/S2, P4, P5, SB, CDP6		

GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' BRK-SIE-003 · Siemens lineage · aka xGB, NGB, HGB, LGB, xGB2, NGB2, HGB2, LGB2

Ampere range	15-125A	A	S1 p.11-16; oem_spec
Voltage rating	480Y/277V; 600Y/347V 14kA	A	same as above
Interrupting ratings	NGB 25kA, HGB 35kA, LGB 65kA @480Y/277V; 100kA @240V	A	same as above
Used in	RP1, P2, P3, P4, P5		

JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) BRK-SIE-009 · Siemens lineage · aka CJD6, HHJD6, HHJXD6, HJD6, HJXD6, JD6, JXD2, JXD6, SCJD6, SCJD6-B, SHJD6, SHJD6-B, SJD6, SJD6-B

Ampere range	200-400A	A	S1, S117 p.11-95; oem_spec
Used in	RP1, P1, S1/S2, P4, P5, SB, CDP6		

LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) BRK-SIE-010 · Siemens lineage · aka CLD6, HHLD6, HHLXD6, HLD6, HLXD6, LD6, LXD6, SCLD6, SCLD6-B, SHLD6, SHLD6-B, SLD6, SLD6-B

Ampere range	250-600A	A	S1, S117 p.11-95; oem_spec
Used in	P4, P5, SB, CDP6		

MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 BRK-SIE-011 · Siemens lineage · aka CMD6, CND6, HLMD6, HLMXD6, HMD6, HMXD6, HND6, HNXD6, LMD6, LMXD6, MD6, MXD6, ND6, NXD6, SCMD6, SCMD6-B, SCND6, SCND6-B, SHMD6, SHMD6-B, SHND6, SHND6-B, SMD6, SMD6-B, SND6, SND6-B

Ampere range	500-800 A	A	S117 p. 7-154, 7-165; oem_spec
	800-1200 A	A	S117 p. 7-154; oem_spec
	MD to 800A, ND to 1200A (Frame ratings from strap kit table max-amp column)	B	S1 inference
Used in	P5, SB, CDP6		

NEB / HEB BRK-SIE-014 · Siemens lineage · aka NEB, HEB

Status	legacy (replacement parts only)	B	S1 p.11-53; inference
Used in	P3, P4, P5		

NGG / HGG / LGG (G-frame bolt-on/lug) BRK-SIE-016 · Siemens lineage · aka NGG, HGG, LGG

Ampere range	15-125 A	A	S117 p. 7-153; oem_spec

QJ2 / QJH2 / QJ2-H / HQJ2H BRK-SIE-006 · Siemens lineage · aka HQJ2H, QJ2, QJ2-H, QJ2H, QJH2

Ampere range	60-225A	A	S4, S119 p.10-18; oem_spec
Status	discontinued; replaced by QR (QJ kits not available, use QR)	A	S1 p.11-53; oem_spec
Used in	P1, P2, P3, CDP6		

QR2 / QRH2 / HQR2 / HQR2H BRK-SIE-007 · Siemens lineage · aka HQR2, HQR2H, QR, QR2, QR2H, QRH2

Ampere range	100-225A (QR rated 250A frame but limited to 225A in panelboard)	A	S1 pp.11-94, 11-96; oem_spec
	100-250 A	A	S117 p. 7-40; oem_spec
Voltage rating	240V max	A	S6 oem_spec
	240 Vac	A	S117 p. 7-40; oem_spec
Used in	RP1, P1, P2, P3, P4, P5, SB		

Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) BRK-SIE-017 · Siemens lineage · aka PD6, PXD6, HPD6, HPXD6, SPD6-B, SHPD6-B, CPD6

Ampere range	1200-1600 A	A	S117 p. 7-154; oem_spec

Sentron RD (RD6, RXD6, HRD6, HRXD6) BRK-SIE-018 · Siemens lineage · aka RD6, RXD6, HRD6, HRXD6

Ampere range	1600-2000 A	A	S117 p. 7-154 to 7-155; oem_spec

Sentron VL (DG, FG, JG, LG, MG, NG) BRK-SIE-013 · Siemens lineage · aka DG, FG, JG, LG, MG, NG, NF/HF/LF, NJ/HJ/LJ, NL/HL/LL, NM/HM/LM

Used in	P4, P5		

FA / FH (I-Line) BRK-SQD-001 · Square D / Schneider Electric · aka FA, FH, FY, FA 240V, FA 480V

Mounting	I-Line plug-on (bolt-on version factory-only: 3rd character 'B')	A	S64, S63, S74 s2 p. 8; s1 p. 22; oem_spec
Breaker frame	100 A	A	same as above
Poles	1 (277 V), 2, 3	A	same as above
Ampere range	15-100 A	A	same as above
Voltage rating	240/480/600 V	A	same as above
Interrupting ratings	FA 240V 10k@240; FA 480V 25k@240/18k@480; FH 65k@240/25k@480/18k@600	A	same as above
group_mount_height	1.5 in. (1-pole); 3 in. (multi-pole) in QED-2 I-Line (Column alignment from text extraction; verify visually)	B	S63 p. 22; oem_spec
bolt_on	Bolt-on construction available only for FA/FH, LA/LH, FY, QB, QD, QG, Q4 (factory order; bus clamps torque 20 lb-in / 3 N-m)	A	S74 oem_spec
Used in	QED-2, I-LINE		

H-frame HD/HG/HJ/HL/HR (I-Line) BRK-SQD-002 · Square D / Schneider Electric · aka HD, HG, HJ, HL, HR, PowerPact H

Mounting	I-Line plug-on	A	S64 p. 8; oem_spec
Breaker frame	150 A	A	same as above
Poles	2, 3 (HR 3)	A	same as above
Ampere range	15-150 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	HD 25k@240/18k@480; HG 65/35; HJ 100/65; HL 125/100; HR 200/200	A	same as above
group_mount_height	4.5 in. (2- and 3-pole)	A	S63 p. 22; oem_spec
class	Class 611	A	S64 p. 10; oem_spec
Used in	QED-2, I-LINE		

I-Limiter FI / KI / LI (I-Line) BRK-SQD-007 · Square D / Schneider Electric · aka FI, KI, LI, I-Limiter

Mounting	I-Line plug-on	A	S63 p. 22; oem_spec
Breaker frame	FI 100 A; KI 250 A; LI 600 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	FI 20-100 A; KI 110-250 A; LI 300-600 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	200k@240/200k@480/100k@600	A	same as above
group_mount_height	FI 4.5 in.; KI 4.5 in.; LI 7.5 in.	A	same as above
swap_fillers	Replacing an LI with a KI requires (1) HLW4BL plus HNM1BL and HLW1BL fillers	A	S71 oem_spec
Used in	QED-2, I-LINE		

J-frame JD/JG/JJ/JL/JR (I-Line) BRK-SQD-004 · Square D / Schneider Electric · aka JD, JG, JJ, JL, JR, PowerPact J

Mounting	I-Line plug-on	A	S64 p. 8; oem_spec
Breaker frame	250 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	150-250 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	JD 25k@240/18k@480; JG 65/35; JJ 100/65; JL 125/100; JR 200/200	A	same as above
group_mount_height	4.5 in.	A	S63 p. 22; oem_spec
class	Class 611	A	S64 p. 10; oem_spec
Used in	QED-2, I-LINE		

LA / LH (I-Line) BRK-SQD-005 · Square D / Schneider Electric · aka LA, LH, LAL, LHL

Mounting	I-Line plug-on (bolt-on factory option)	A	S64 p. 8; oem_spec
Breaker frame	400 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	125-400 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	LA 42k@240/30k@480/22k@600; LH 65/35/25	A	same as above
group_mount_height	6 in. (2- and 3-pole)	A	S63 p. 22; oem_spec
class	Class 660	A	S64 p. 10; oem_spec
Used in	QED-2, I-LINE		

LC (I-Line, 600 A) BRK-SQD-006 · Square D / Schneider Electric · aka LC

Mounting	I-Line plug-on	A	S63 p. 22; oem_spec
Breaker frame	600 A	A	same as above
Poles	3	A	same as above
Ampere range	300-600 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	100k@240/65k@480/35k@600	A	same as above
group_mount_height	7.5 in.	A	same as above
Used in	QED-2		

M-frame MG/MJ (I-Line) BRK-SQD-009 · Square D / Schneider Electric · aka MG, MJ, PowerPact M

Mounting	I-Line plug-on	A	S64 p. 8; oem_spec
Breaker frame	800 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	300-800 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	MG 65k@240/35k@480/18k@600; MJ 100/65/25	A	same as above
group_mount_height	9 in. (per QED-2 table, shared with P-frame row) (Column alignment in text extraction ambiguous)	C	S63 p. 22; oem_spec
class	Class 612	A	S64 p. 10; oem_spec
Used in	QED-2, I-LINE		

P-frame PG/PJ/PK/PL (I-Line) BRK-SQD-010 · Square D / Schneider Electric · aka PG, PJ, PK, PL, PG-C, PJ-C, PK-C, PL-C, PowerPact P

Mounting	I-Line plug-on	A	S64, S63 s2 p. 8; s1 p. 22; oem_spec
Breaker frame	1200 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	100-1200 A (catalog 600-1200 A in 2110CT9701)	A	same as above
Voltage rating	600 V (PL 480 V)	A	same as above
Interrupting ratings	PG 65k@240/35k@480; PJ 100/65; PK 65/50/50 (Canada); PL 125/100	A	same as above
group_mount_height	9 in. (2-/3-pole)	A	S63 p. 22; oem_spec
note_100pct	Cannot group mount 100% rated 1000 A and 1200 A P-frame; use R-frame	A	same as above
Used in	QED-2, I-LINE		

PowerPact B-frame BD/BG/BJ/BK (I-Line) BRK-SQD-012 · Square D / Schneider Electric · aka BD, BG, BJ, BK, PowerPact B

Mounting	I-Line plug-on	A	S64 p. 8; oem_spec
Breaker frame	125 A	A	same as above
Poles	1, 2, 3 (BK 1, 2)	A	same as above
Ampere range	15-125 A (BK 15-30 A)	A	same as above
Voltage rating	600Y/347 V	A	same as above
Interrupting ratings	BD 25k@240/18k@480; BG 65/35; BJ 100/65; BK 100/65/65	A	same as above
Used in	I-LINE		

PowerPact L-frame LD/LG/LJ/LL/LR (I-Line) BRK-SQD-008 · Square D / Schneider Electric · aka LD, LG, LJ, LL, LR, PowerPact L

Mounting	I-Line plug-on	A	S64 p. 8; oem_spec
Breaker frame	600 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	250-600 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	LD 25k@240/18k@480; LG 65/35; LJ 100/65; LL 125/100; LR 200/200	A	same as above
mount_screw	No orderable mounting screw for L-frame in I-Line; a 10-32 x 5/8 screw can be used	A	S77 oem_spec
Used in	QED-2, I-LINE		

Q-frame QB/QD/QG/QJ (I-Line) BRK-SQD-003 · Square D / Schneider Electric · aka QB, QD, QG, QJ, Q2, Q4

Mounting	I-Line plug-on	A	S64 p. 8; oem_spec
Breaker frame	225 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	70-225 A	A	same as above
Voltage rating	240 V	A	same as above
Interrupting ratings	QB 10k, QD 25k, QG 65k, QJ 100k @240 V	A	same as above
group_mount_height	3 in. (single value printed in the mounting-height columns for QB/QD/QG/QJ) (Text extraction column alignment ambiguous; which pole columns the 3 in. applies to needs PDF visual check)	C	S63 p. 22; oem_spec
class	Class 734	A	S64 p. 10; oem_spec
Used in	QED-2, I-LINE		

QMB circuit breaker units (H-, J-, L-frame) BRK-SQD-013 · Square D / Schneider Electric · aka QMB breaker unit, QMB3400LA

Mounting	QMB plug-on unit with permanently attached mounting brackets	A	S65 pp. 17-18; oem_spec
Breaker frame	Twin H-frame HD/HG 15-150 A; single JD/JG 150-250 A; single LA/LH 225-400 A	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Interrupting ratings	HD 25k@240/18k@480/14k@600; HG 65/35/18; JD 25/18/14; JG 65/35/18; LA 42/30/22; LH 65/35/25	A	same as above
Used in	QMB, QED-2		

R-frame RG/RJ/RK/RL (I-Line) BRK-SQD-011 · Square D / Schneider Electric · aka RG, RJ, RK, RL, RG-C, RJ-C, RK-C, RL-C, PowerPact R

Mounting	I-Line plug-on	A	S64, S63 s2 p. 9; s1 p. 22; oem_spec
Breaker frame	1200 A (2500 A frame per QED-2 table)	A	same as above
Poles	2, 3	A	same as above
Ampere range	1000-1200 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	RG 65k@240/35k@480; RJ 100/65; RK 65/65/65 (Canada); RL 125/100/50	A	same as above
group_mount_height	15 in.	A	S63 p. 22; oem_spec
Used in	QED-2, I-LINE		

8 Cross-Reference Tables

8.1 Supersession and alternate numbers

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
0080429	alias	K80429	EDH-EAT-00449	B	128
11-D-4554-01	alias	DFFP1A	EDH-SIE-00062	A	526
11-D-4560-01	supersedes	DFFP01B	EDH-SIE-00064	A	525
12-1800-01	alias	DFFP1A	EDH-SIE-00062	A	526
12-1800-01	alias	QF3	EDH-SIE-00063	C	547
12-A-1801-01	supersedes	DFFP01B	EDH-SIE-00064	A	525
12-A-1802-01	supersedes	DFFPVA41A	EDH-SIE-00066	A	528
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	1C96619	EDH-EAT-00370	A	124
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	1C96620	EDH-EAT-00371	A	124
1C96608G01..G63 (odd item numbers)	style_number	1C96608	EDH-EAT-00290	A	115
1C96609G01..G63 (same G scheme as 1C96608)	style_number	1C96609	EDH-EAT-00292	A	144
1C96647	supersedes	42C4050	EDH-EAT-00344	B	120
1C96650	supersedes	42C4051	EDH-EAT-00348	B	120
1C96653	supersedes	42C4052	EDH-EAT-00352	B	121
1X H01; 2X H02; 3X H03; 4X H13; 5X H14; 6X H04; 7X H05; 9X H06; 10X H07; 11X H08; 12X H09; 13X H10; 15X H11; 20X H12	style_number	6554C01	EDH-EAT-00411	A	208
225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	style_number	1C96652	EDH-EAT-00351	A	119
2C11642G03, G07, G11, G15 ... G59, G63 (silver-plated copper only)	style_number	2C11642	EDH-EAT-00291	A	115
2NLK30A	supersedes	2NLK42B	EDH-SIE-00040	A	515
2NLK42A	supersedes	2NLK42B	EDH-SIE-00040	A	515
2NLK54A	supersedes	2NLK54B	EDH-SIE-00041	A	516
3TC1QR2520	alias	3TC1QR250	EDH-SIE-00254	B	576
40517-407-01	style_number	HNM4BL	EDH-SQD-00138	A	233
40517-408-01	style_number	HNM1BL	EDH-SQD-00137	A	233
4176B68	supersedes	42C8076	EDH-EAT-00375	C	164
4178B06H01	supersedes	42C8083H01	EDH-EAT-00405	B	167
4178B08	supersedes	42C8078	EDH-EAT-00390	C	164
4179B39	supersedes	42C8079	EDH-EAT-00391	C	165
4179B40	supersedes	42C8080	EDH-EAT-00392	C	165
4179B41	supersedes	42C8082	EDH-EAT-00394	C	166
4179B42	supersedes	42C8081	EDH-EAT-00393	C	165
4180B03	supersedes	42C8072	EDH-EAT-00362	C	126
4180B05	supersedes	42C7982	EDH-EAT-00364	C	126
4180B61	supersedes	42C8073	EDH-EAT-00363	C	126
4180B93	supersedes	42C8077	EDH-EAT-00376	C	164
42C7982	superseded_by	4180B05	EDH-EAT-00367	C	125

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
42C8072	superseded_by	4180B03	EDH-EAT-00365	C	125
42C8073	superseded_by	4180B61	EDH-EAT-00366	C	125
42C8076	superseded_by	4176B68	EDH-EAT-00387	C	160
42C8077	superseded_by	4180B93	EDH-EAT-00388	C	163
42C8078	superseded_by	4178B08	EDH-EAT-00400	C	162
42C8079	superseded_by	4179B39	EDH-EAT-00401	C	162
42C8080	superseded_by	4179B40	EDH-EAT-00402	C	162
42C8081	superseded_by	4179B42	EDH-EAT-00404	C	163
42C8082	superseded_by	4179B41	EDH-EAT-00403	C	162
42C8083H01	superseded_by	4178B06H01	EDH-EAT-00406	B	167
42NLK30A	supersedes	42NLK54B	EDH-SIE-00042	A	516
42NLK42A	supersedes	42NLK54B	EDH-SIE-00042	A	516
42NLK54A	supersedes	42NLK54B	EDH-SIE-00042	A	516
4 ckt 2X H01; 8/4X H02; ... 32/16X H08	style_number	42C8079	EDH-EAT-00391	A	165
4MLKA1	equivalent	4MLKA1A	EDH-SIE-00019	A	508
4MLKA3	equivalent	4MLKA3A	EDH-SIE-00020	A	509
4MLKC1	equivalent	4MLKC1A	EDH-SIE-00021	A	510
4MLKC3	equivalent	4MLKC3A	EDH-SIE-00022	A	510
5158C05G06 (boxes 30 in and above)	style_number	5158C05G05	EDH-EAT-00063	A	55
6 ckt 3X H01; 12/5X H02; 18/8X H03; 24/10X H04	style_number	4176B69	EDH-EAT-00398	A	161
6 ckt 3X H01; 12/6X H02; 18/9X H03; 24/12X H04; 30/15X H05; 36/18X H06; 42/21X H07; 48/24X H08	style_number	42C8078	EDH-EAT-00390	A	164
6 ckt 3X H01; 12 ckt 5X H02; 18 ckt 8X H03; 24 ckt 10X H04	style_number	4176B67	EDH-EAT-00397	A	160
6CLF1C	alias	6CLF1	EDH-SIE-00191	A	537
6CLJ1C	alias	6CLJ1	EDH-SIE-00194	A	538
6CLL1C	alias	6CLL1	EDH-SIE-00198	A	539
6LL61C	alias	6LL61	EDH-SIE-00197	A	542
6QR2CAN	alias	6QR2	EDH-SIE-00157	A	483
6QR2CCAN	alias	6QR2	EDH-SIE-00157	A	483
6SJL1C	alias	6SJL1	EDH-SIE-00195	A	546
789A448G377 (as printed)	alias	789A448G3	EDH-GEA-00330	C	418
80025-067-01	supersedes	PKDFSCREW	EDH-SQD-00161	A	234
80034-187-02	style_number	HLW1BL	EDH-SQD-00142	A	231
80034-188-03	style_number	HLW4BL	EDH-SQD-00143	A	232
80121-651-01	style_number	HLN1BL	EDH-SQD-00139	A	230
80121-652-01	style_number	HLN4BL	EDH-SQD-00140	A	230
80121-653-01	style_number	HLW4EBL	EDH-SQD-00144	A	232
80121-752-01	style_number	HLN4EBL	EDH-SQD-00141	A	231
8450C62H39	equivalent	K80133	EDH-EAT-00448	C	128
ACSFPKSG	equivalent	ACSMKSG	EDH-GEA-00254	A	332
ACSFPKSK	equivalent	ACSMKSK	EDH-GEA-00255	A	332
ACSHKSG	equivalent	ACSMKSG	EDH-GEA-00254	A	332
ACSHKSK	equivalent	ACSMKSK	EDH-GEA-00255	A	332
ACTFPKEB1P	equivalent	ACTMKEB1P	EDH-GEA-00246	A	332
ACTFPKEB2P	equivalent	ACTMKEB2P	EDH-GEA-00247	A	333
ACTFPKEB3P	equivalent	ACTMKEB3P	EDH-GEA-00248	A	333
ACTFPKJD	equivalent	ACTMKJD	EDH-GEA-00252	A	333
ACTFPKQD2P	equivalent	ACTMKQD2P	EDH-GEA-00250	A	334

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
ACTFPKQD3P	equivalent	ACTMKQD3P	EDH-GEA-00251	A	334
ACTFPKSE	equivalent	ACTMKSE	EDH-GEA-00245	A	334
ACTFPKSF	equivalent	ACTMKSF	EDH-GEA-00249	A	335
ACTFPKSG	equivalent	ACTMKSG	EDH-GEA-00253	A	335
ACTHKEB1P	equivalent	ACTMKEB1P	EDH-GEA-00246	A	332
ACTHKEB2P	equivalent	ACTMKEB2P	EDH-GEA-00247	A	333
ACTHKEB3P	equivalent	ACTMKEB3P	EDH-GEA-00248	A	333
ACTHKJD	equivalent	ACTMKJD	EDH-GEA-00252	A	333
ACTHKQD2P	equivalent	ACTMKQD2P	EDH-GEA-00250	A	334
ACTHKQD3P	equivalent	ACTMKQD3P	EDH-GEA-00251	A	334
ACTHKSE	equivalent	ACTMKSE	EDH-GEA-00245	A	334
ACTHKSF	equivalent	ACTMKSF	EDH-GEA-00249	A	335
ACTHKSG	equivalent	ACTMKSG	EDH-GEA-00253	A	335
AMC2FGM	alias	AMC2FGMFP	EDH-GEA-00181	B	359
AMC2FJ	alias	AMC2FJFP	EDH-GEA-00179	B	359
AMC2FJFPTF	alias	AMC2FJFPTF	EDH-GEA-00178	B	360
AMC2FLS	alias	AMC2FLSFP	EDH-GEA-00184	B	360
AMC2GM	alias	AMC2GMFP	EDH-GEA-00182	B	361
AMC2JK	alias	AMC2JKFP	EDH-GEA-00180	B	362
AMC2KM	alias	AMC2KMFP	EDH-GEA-00183	B	362
AMC3FGM	alias	AMC3FGMFP	EDH-GEA-00162	B	363
AMC3FJ	alias	AMC3FJFP	EDH-GEA-00160	B	363
AMC3FJFPTF	alias	AMC3FJFPTF	EDH-GEA-00159	B	364
AMC3FLS	alias	AMC3FLSFP	EDH-GEA-00165	B	364
AMC3GM	alias	AMC3GMFP	EDH-GEA-00163	B	365
AMC3JK	alias	AMC3JKFP	EDH-GEA-00161	B	365
AMC3KM	alias	AMC3KMFP	EDH-GEA-00164	B	366
AMC4EB	alias	AMC4EBFP	EDH-GEA-00167	B	366
AMC4EBS	alias	AMC4EBSFP	EDH-GEA-00176	B	367
AMC4FDB	alias	AMC4FDBFP	EDH-GEA-00166	B	367
AMC4FDS	alias	AMC4FDSFP	EDH-GEA-00175	B	368
AMC4FGB	alias	AMC4FGBFP	EDH-GEA-00173	B	368
AMC4FJ	alias	AMC4FJFP	EDH-GEA-00171	B	369
AMC4FJFPTF	alias	AMC4FJFPTF	EDH-GEA-00170	B	370
AMC4FLS	alias	AMC4FLSFP	EDH-GEA-00177	B	370
AMC4GB	alias	AMC4GBFP	EDH-GEA-00174	B	371
AMC4JK	alias	AMC4JKFP	EDH-GEA-00172	B	371
AMC4QD	alias	AMC4QDFP	EDH-GEA-00169	B	372
AMC4SE	alias	AMC4SEFP	EDH-GEA-00168	B	373
AMC6EB	alias	AMC6EBFP	EDH-GEA-00149	B	373
AMC6EBS	alias	AMC6EBSFP	EDH-GEA-00157	B	374
AMC6EY	alias	AMC6EYFP	EDH-GEA-00146	B	374
AMC6FB	alias	AMC6FBFP	EDH-GEA-00147	B	375
AMC6FDB	alias	AMC6FDBFP	EDH-GEA-00148	B	375
AMC6FDSPF	alias	AMC6FDSPF	EDH-GEA-00156	B	376
AMC6FGB	alias	AMC6FGBFP	EDH-GEA-00154	B	376
AMC6FJ	alias	AMC6FJFP	EDH-GEA-00152	B	377
AMC6FJFPTF	alias	AMC6FJFPTF	EDH-GEA-00151	B	377
AMC6FLS	alias	AMC6FLSFP	EDH-GEA-00158	B	378
AMC6GB	alias	AMC6GBFP	EDH-GEA-00155	B	378
AMC6JK	alias	AMC6JKFP	EDH-GEA-00153	B	379
AMC6QB	alias	AMC6QBFP	EDH-GEA-00145	B	379

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
AMC6QD	alias	AMC6QDFP	EDH-GEA-00150	B	380
AMCB2FGM	alias	AMCB2FGMFP	EDH-GEA-00119	B	342
AMCB2FJ	alias	AMCB2FJFP	EDH-GEA-00117	B	343
AMCB2FJTF	alias	AMCB2FJFPTF	EDH-GEA-00118	B	343
AMCB2GM	alias	AMCB2GMFP	EDH-GEA-00120	B	344
AMCB2KM	alias	AMCB2KMFP	EDH-GEA-00126	B	344
AMCB3FGM	alias	AMCB3FGMFP	EDH-GEA-00123	B	345
AMCB3FJ	alias	AMCB3FJFP	EDH-GEA-00121	B	345
AMCB3FJTF	alias	AMCB3FJFPTF	EDH-GEA-00122	B	346
AMCB3GM	alias	AMCB3GMFP	EDH-GEA-00124	B	346
AMCB3KM	alias	AMCB3KMFP	EDH-GEA-00127	B	347
AMCB3LB	alias	AMCB3LBFP	EDH-GEA-00125	B	347
AMCB4EB	alias	AMCB4EBFP	EDH-GEA-00098	B	348
AMCB4EY	alias	AMCB4EYFP	EDH-GEA-00099	B	348
AMCB4FB	alias	AMCB4FBFP	EDH-GEA-00100	B	349
AMCB4FDB	alias	AMCB4FDBFP	EDH-GEA-00101	B	349
AMCB4FGB	alias	AMCB4FGBFP	EDH-GEA-00113	B	349
AMCB4FJ	alias	AMCB4FJFP	EDH-GEA-00109	B	350
AMCB4FJTF	alias	AMCB4FJFPTF	EDH-GEA-00111	B	350
AMCB4GB	alias	AMCB4GBFP	EDH-GEA-00114	B	351
AMCB4QD	alias	AMCB4QDFP	EDH-GEA-00102	B	351
AMCB4SE	alias	AMCB4SEFP	EDH-GEA-00103	B	352
AMCB6EB	alias	AMCB6EBFP	EDH-GEA-00104	B	352
AMCB6EY	alias	AMCB6EYFP	EDH-GEA-00105	B	353
AMCB6FB	alias	AMCB6FBFP	EDH-GEA-00106	B	353
AMCB6FDB	alias	AMCB6FDBFP	EDH-GEA-00107	B	354
AMCB6FGB	alias	AMCB6FGBFP	EDH-GEA-00115	B	354
AMCB6FJ	alias	AMCB6FJFP	EDH-GEA-00110	B	355
AMCB6FJTF	alias	AMCB6FJFPTF	EDH-GEA-00112	B	355
AMCB6GB	alias	AMCB6GBFP	EDH-GEA-00116	B	356
AMCB6QD	alias	AMCB6QDFP	EDH-GEA-00108	B	356
BBKVA5262S	alias	BBKVA5262P2S	EDH-SIE-00112	A	453
Bottom H01 (no L/O), H02 (2 L/O), H03 (1 L/O RT), H04 (1 L/O LT); top H05, H07 (1 L/O RT), H08 (1 L/O LT)	style_number	4176B79	EDH-EAT-00385	A	161
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	4176B61	EDH-EAT-00380	A	160
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	4176B51	EDH-EAT-00381	A	159
BQFS1K	equivalent	BQFS2	EDH-SIE-00252	A	554
BX2457 G02; BX2473 G03; BX2490 G04; BX3673/BX4473 G05; BX3690/BX4490 G06	style_number	6574C74	EDH-EAT-00415	A	207
Chassis height 14X G01; 23X G02; 31X G03; 40X G04; 53X G05	style_number	6559C59	EDH-EAT-00374	A	166
CNLK30A	supersedes	CNLK42B	EDH-SIE-00038	A	517
CNLK42A	supersedes	CNLK42B	EDH-SIE-00038	A	517
CNLK54A	supersedes	CNLK54B	EDH-SIE-00039	A	517
Controller 5X H01; Expansion 7X H02, 16X H03	style_number	4180B91	EDH-EAT-00399	A	163
DFFP01A	supersedes	DFFP01B	EDH-SIE-00064	A	525
DFFP1	supersedes	DFFP1A	EDH-SIE-00062	A	526

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
DFFP1A	superseded_by	QF3	EDH-SIE-00063	A	547
DFFPED01	supersedes	DFFPVA41A	EDH-SIE-00066	A	528
DFFPVA41A	superseded_by	DFFPED01	EDH-SIE-00069	A	449
Enclosure height 24 in G01; 36 in G02; 42 in G07; 48 in G03; 60 in G04; 72 in G05; 90 in G06	style_number	1C96638	EDH-EAT-00361	A	124
G01 24 in Al/Cu; G02 24 in Cu; G03 36-90 in Al/Cu; G04 36-90 in Cu	style_number	2C11296	EDH-EAT-00358	A	121
G01 24 in encl Al/Cu; G03 24 in Cu; G02 36-90 in encl Al/Cu; G04 36-90 in Cu (vintage PRL: G02 boxes >=30 in, G01 boxes <30 in)	style_number	5158C05	EDH-EAT-00357	A	122
GTIN 785901798019	alias	QMB15BLW	EDH-SQD-00092	A	244
H01	style_number	4176B57	EDH-EAT-00383	A	159
H01	style_number	42C8080	EDH-EAT-00392	A	165
H01	style_number	42C8081	EDH-EAT-00393	A	165
H01	style_number	42C8082	EDH-EAT-00394	A	166
H01	style_number	4176B66	EDH-EAT-00395	A	160
H01	style_number	4176B80	EDH-EAT-00396	A	161
H01 = 1.00 in (25.4 mm) ... H16 = 16.00 in (406.4 mm), 1 in increments	style_number	4180B08	EDH-EAT-00369	A	127
H01 12 ckt 10 in; H02 18/13 in; H03 24/16 in; H04 30/19 in; H05 36/22 in; H06 42/25 in; H07 48/28 in; H08 54/31 in; H09 60/34 in	style_number	5156C10	EDH-EAT-00409	A	56
H01 = 1X ... H12 = 12X	style_number	4176B72	EDH-EAT-00389	A	166
H01 bottom/H02 with lock-offs; H03 top/H04 with lock-offs	style_number	4176B60	EDH-EAT-00379	A	159
H01 FCL; H02 FB-P	style_number	4176B70	EDH-EAT-00382	A	161
H01/H02 top; H03/H04 bottom (without/with lock-offs)	style_number	4176B56	EDH-EAT-00384	A	159
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	4176B68	EDH-EAT-00387	A	160
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	4180B93	EDH-EAT-00388	A	163
H01-H09 (12-60 circuits, 10-34 in high; same heights as 5156C10)	style_number	5156C09	EDH-EAT-00410	A	55
H01 (top and bottom)	style_number	4180B03	EDH-EAT-00365	A	125
H01 (top and bottom)	style_number	4180B61	EDH-EAT-00366	A	125
H01 top, H02 bottom	style_number	42C8072	EDH-EAT-00362	A	126
H01 top, H02 bottom	style_number	42C7982	EDH-EAT-00364	A	126
H01 top, H02 bottom	style_number	4180B05	EDH-EAT-00367	A	125
H01 top, H02 bottom	style_number	4180B04	EDH-EAT-00368	A	125
H01 top, H02 bottom	style_number	42C8077	EDH-EAT-00376	A	164
H01 top, H02 bottom	style_number	42C8055	EDH-EAT-00378	A	178
H01 top, H02 bottom (same with/without lock-offs)	style_number	42C8076	EDH-EAT-00375	A	164
H01 top, H04 bottom	style_number	42C8073	EDH-EAT-00363	A	126
H01 top (thermal-magnetic), H02 bottom (PXR)	style_number	42C7980	EDH-EAT-00377	A	178
KCDPFD100H	alias	KCDPFB100-H	EDH-EAT-00013	C	31
KPRL45X	supersedes	KPRL45X1	EDH-EAT-00109	C	182
KPRL45X1	superseded_by	KPRL45X	EDH-EAT-00416	C	181
KPRL4ED	supersedes	KPRL4X32	EDH-EAT-00096	C	203
KPRL4ED2	supersedes	KPRL4X22	EDH-EAT-00095	C	202
KPRL4FD	supersedes	KPRL4X32	EDH-EAT-00096	C	203

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
KPRL4FD1	supersedes	KPRL4X12	EDH-EAT-00094	C	201
KPRL4FD2	supersedes	KPRL4X22	EDH-EAT-00095	C	202
KPRL4LC	superseded_by	KPRL4LD	EDH-EAT-00089	C	195
KPRL4LD	supersedes	KPRL4LC	EDH-EAT-00104	C	194
KPRL4MC	supersedes	KPRL4X34	EDH-EAT-00100	C	205
KPRL4ND	supersedes	KPRL4X35	EDH-EAT-00101	C	206
KPRL4X12	superseded_by	KPRL4FD1	EDH-EAT-00076	C	188
KPRL4X22	superseded_by	KPRL4FD2	EDH-EAT-00077	C	189
KPRL4X22	superseded_by	KPRL4ED2	EDH-EAT-00078	C	186
KPRL4X32	superseded_by	KPRL4FD	EDH-EAT-00079	C	187
KPRL4X32	superseded_by	KPRL4ED	EDH-EAT-00081	C	185
KPRL4X34	superseded_by	KPRL4MC	EDH-EAT-00090	C	196
KPRL4X35	superseded_by	KPRL4ND	EDH-EAT-00093	C	199
LNLK30A	supersedes	LNLK4X11B	EDH-SIE-00035	A	518
LNLK42A	supersedes	LNLK6X17B	EDH-SIE-00036	A	519
LNLK54A	supersedes	LNLK7X20B	EDH-SIE-00037	A	520
MBKBC1NBA	supersedes	MBKVA41A	EDH-SIE-00001	A	504
MBKBC3NBA	supersedes	MBKVA41B	EDH-SIE-00002	A	505
MBKBL1A	supersedes	MBKVA41A	EDH-SIE-00001	A	504
MBKBL3A	supersedes	MBKVA41B	EDH-SIE-00002	A	505
MBKJD1A	supersedes	MBKJD3B	EDH-SIE-00012	A	502
MBKJD3A	supersedes	MBKJD3B	EDH-SIE-00012	A	502
Mechanical: 100 A G01-G04, 250-600 A G13-G16; Crimp: 100 A G05-G08, 250-600 A G17-G20; Copper lugs: 100 A G09-G12, 250-600 A G21-G24 (order tin Al / bare Cu / silver Cu / tin Cu)	style_number	5078A98	EDH-EAT-00342	A	168
Mechanical main lugs/main breakers: 100-225 A G01 (tin Al) G02 (bare Cu) G03 (silver Cu) G04 (tin Cu); 400-600 A G05-G08. Crimp main lugs: 100-225 A G09-G12; 400-600 A G13-G16. Copper main lugs: 100-225 A G18-G20; 400-600 A G22-G24	style_number	4180B62	EDH-EAT-00341	A	129
MLKA1	equivalent	MLKA1A	EDH-SIE-00015	A	511
MLKA3	equivalent	MLKA3A	EDH-SIE-00016	A	511
MLKC1	equivalent	MLKC1A	EDH-SIE-00017	A	512
MLKC3	equivalent	MLKC3A	EDH-SIE-00018	A	512
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G02	EDH-EAT-00055	A	54
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G01	EDH-EAT-00056	A	53
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G04	EDH-EAT-00057	A	54
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G03	EDH-EAT-00058	A	54
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C04G01	EDH-EAT-00059	A	54
PT363 top H01 / bottom H02 (7X); PT364 top H03 / bottom H04 (9X)	style_number	4180B79	EDH-EAT-00386	A	163
QF3	equivalent	DFFP1A	EDH-SIE-00062	A	526
QMB200EK-1	alias	QMB200EK	EDH-SQD-00062	A	251

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
QMB200EK-2	alias	QMB200EK	EDH-SQD-00062	A	251
QMB300EK-1	alias	QMB300EK	EDH-SQD-00060	A	251
QMB300EK-2	alias	QMB300EK	EDH-SQD-00060	A	251
QMB-320-EX	alias	QMB320EX	EDH-SQD-00110	A	285
QMB322TD	alias	QMB322TW	EDH-SQD-00012	C	266
QMB323TD	alias	QMB323TW	EDH-SQD-00014	C	267
QMB362T	alias	QMB362TW	EDH-SQD-00031	C	273
QMB610EK-1	alias	QMB610EK	EDH-SQD-00061	A	253
QMB610EK-2	alias	QMB610EK	EDH-SQD-00061	A	253
Same H scheme as 6554C01 (4X = H13, 5X = H14)	style_number	6554C02	EDH-EAT-00412	A	208
SG1BCK4 (as printed 2019)	alias	SG1BCK	EDH-GEA-00351	B	434
SK1LCK3 (as printed 2019)	alias	SK1LCK	EDH-GEA-00352	B	438
SKLVK6 / SKLVK8 (as printed)	alias	SKLVK	EDH-GEA-00333	B	418
STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	style_number	42C4050	EDH-EAT-00344	A	120
STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	style_number	1C96645	EDH-EAT-00355	A	116
STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	style_number	42C4051	EDH-EAT-00348	A	120
STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2	style_number	1C96653	EDH-EAT-00353	A	119
STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	style_number	42C4052	EDH-EAT-00352	A	121
STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil	style_number	1C96650	EDH-EAT-00349	A	118
STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	style_number	1C97022	EDH-EAT-00356	A	120
STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil	style_number	1C96647	EDH-EAT-00345	A	117
STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	style_number	1C96646	EDH-EAT-00343	A	117
STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	style_number	1C96649	EDH-EAT-00347	A	118
STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	style_number	1C96654	EDH-EAT-00354	A	119
STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	style_number	1C96648	EDH-EAT-00346	A	117
STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	style_number	1C96651	EDH-EAT-00350	A	118
TC0416 / TC0414	alias	TC041	EDH-GEA-00303	B	412
TCAL1214 / TCAL1212	alias	TCAL121	EDH-GEA-00312	B	414
TCAL1225 / TCAL1223	alias	TCAL122	EDH-GEA-00316	B	414
TCAL1314 / TCAL1312	alias	TCAL131	EDH-GEA-00322	B	415
TCAL433	alias	TCAL43	EDH-GEA-00292	B	404
TCAL812 / TCAL811	alias	TCAL81	EDH-GEA-00308	B	416
TCAL912 / TCAL911	alias	TCAL91	EDH-GEA-00319	B	416
TCALK21214 / TCALK21212	alias	TCALK2121	EDH-GEA-00313	B	407
TCALK21225 / TCALK21223	alias	TCALK2122	EDH-GEA-00317	B	407
TCALK2812 / TCALK2811	alias	TCALK281	EDH-GEA-00309	B	408

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
TCALK2912 / TCALK2911	alias	TCALK291	EDH-GEA-00320	B	408
TCALK31214 / TCALK31212	alias	TCALK3121	EDH-GEA-00314	B	408
TCALK31225 / TCALK31223	alias	TCALK3122	EDH-GEA-00318	B	409
TCALK3812 / TCALK3811	alias	TCALK381	EDH-GEA-00310	B	410
TCALK3912 / TCALK3911	alias	TCALK391	EDH-GEA-00321	B	410
TCLK2652 / TCLK2651 (as printed)	alias	TCLK265	EDH-GEA-00339	B	432
TCLK3652 / TCLK3653 / TCLK3654 (as printed)	alias	TCLK365	EDH-GEA-00340	B	432
TCO121	alias	TC0121	EDH-GEA-00315	B	411
TCO18	alias	TC018	EDH-GEA-00354	B	426
TCO81A	alias	TC081A	EDH-GEA-00311	B	413
TJLVK8 (as printed)	alias	TJLVK	EDH-GEA-00334	B	406
UPC 782114795996	alias	KPRL4KDS	EDH-EAT-00084	A	192
UPC 782114796412	alias	KPRL4KDT	EDH-EAT-00085	A	192
VCEL021-14S1	alias	VCEL02114S1	EDH-SQD-00074	A	241
VCEL030-516H1	alias	VCEL030516H1	EDH-SQD-00071	A	241
VCEL050-12H1	alias	VCEL05012H1	EDH-SQD-00072	A	241
VCEL060-12H1	alias	VCEL06012H1	EDH-SQD-00079	A	242
VCEL075-12H1	alias	VCEL07512H1	EDH-SQD-00073	A	242
VCELC021-14S1	alias	VCELC02114S1	EDH-SQD-00075	A	242
VCELC030-38H1	alias	VCELC03038H1	EDH-SQD-00076	A	242
VCELC050-12H1	alias	VCELC05012H1	EDH-SQD-00077	A	243
VCELC075-12H1	alias	VCELC07512H1	EDH-SQD-00078	A	243
Westinghouse DA breaker	supersedes	KCDPDK	EDH-EAT-00024	A	32
Westinghouse EB, EHB breaker	supersedes	KCDPEHD	EDH-EAT-00016	A	33
Westinghouse FB breaker	supersedes	KCDPFDB	EDH-EAT-00017	A	35
Westinghouse HFB breaker	supersedes	KCDPFD	EDH-EAT-00018	A	34
Westinghouse HKA breaker	supersedes	KCDPHKD	EDH-EAT-00020	A	36
Westinghouse JA breaker	supersedes	KCDPKDB	EDH-EAT-00022	A	40
Westinghouse JB breaker	supersedes	KCDPJDB	EDH-EAT-00023	A	38
Westinghouse KA breaker	supersedes	KCDPKD	EDH-EAT-00019	A	39
Westinghouse KB, HKB breaker	supersedes	KCDPJD	EDH-EAT-00021	A	37
Westinghouse LA, HLA breaker	supersedes	KCDPLD	EDH-EAT-00025	A	41
Westinghouse MA, HMA breaker	supersedes	KCDPMDL	EDH-EAT-00026	A	42
Westinghouse NB, HNB breaker	supersedes	KCDPND	EDH-EAT-00027	A	43

8.2 Replacement and successor statements

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-EAT-00004	KCDPCA	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00002	KCDPED225	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00001	KCDPFB100	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00003	KCDPFBP	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00005	KCDPKB	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00007	KCDPLA400	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00008	KCDPLA600	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00006	KCDPLB	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-EAT-00009	KCDPLCL	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00010	KCDPMC	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00012	KCDPNBP	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00011	KCDPNC	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00081	KPRL4ED	KPRL4X32 covers the same frames in the April 2021 table	D
EDH-EAT-00078	KPRL4ED2	KPRL4X22 covers the same frames in the April 2021 table	D
EDH-EAT-00079	KPRL4FD	KPRL4X32 covers the same frames in the April 2021 table	D
EDH-EAT-00076	KPRL4FD1	KPRL4X12 covers the same frames in the April 2021 table	D
EDH-EAT-00077	KPRL4FD2	KPRL4X22 covers the same frames in the April 2021 table	D
EDH-EAT-00089	KPRL4LD	KPRL4LC covers the same frames in the April 2021 table	D
EDH-SIE-00004	MBKED3A	Factory kits with breaker: MBKED3100A, MBKED3125A (3-pole ED4)	A
EDH-SIE-00008	MBKFD3A	Kits with breaker: MBKFD3150A, MBKFD3175A, MBKFD3200A, MBKFD3225A, MBKFD3250A (3P FXD6)	A
EDH-SIE-00005	MBKQR1A	Kits with breaker: MBKQR1125A..MBKQR1225A (2P QR2 125-225A, 10kA); MBKQR1125HA..MBKQR1225HA (2P HQR2, 65kA)	A
EDH-SIE-00006	MBKQR3A	Kits with breaker: MBKQR3125A..MBKQR3225A (3P QR2); MBKQR3125HA..MBKQR3225HA (3P HQR2)	A
EDH-SIE-00010	MBKVA5262B	Kits with breaker: MBKVAM3150A/3200A/3225A/3250A (3VA52 MFAS 35kA), MBKVAH3200A/3250A (3VA52 HFAS 65kA)	A
EDH-SQD-00101	QMB210T	QM (31 in., 1961-Oct 1984) or QW (pre-1984): QMB323TD in outside poles; QW with flat bus may need QMB310LEX	A
EDH-SQD-00104	QMB2240	No direct switch; QMB3400LA 3P 400 A breaker unit (QMB interiors 1961-Oct 1984); QMB310EX for QW; QW1BL/QW3BL fillers obsolete	A
EDH-SQD-00135	QMB303T	QMB321T (+ QMB306LEX in QW interior 1961-Oct 1984); QMB321T cannot go in QM pre-1961 or current Series E1 interiors	C
EDH-SQD-00136	QMB306T	QMB322TD in QMB interiors 1961-Oct 1984; QMB306LEX for QW with flat bus	C
EDH-SQD-00100	QMB310T	No replacement if round bus bars; QM (31 in., 1961-Oct 1984) or QW (38 in., pre-1984): QMB323TD (use outside poles); QW flat bus may also need QMB310LEX	A
EDH-SQD-00103	QMB3240	No renewal parts; replace with QMB3400LA (7.5 in.) + QMB310EX + QW1BL and QW3BL fillers (obsolete; fabricate)	A
EDH-SQD-00105	QMB3260	600 A fusible no longer available; if load allows 400 A breaker use QMB3400LA (7.5 in.) + QMB310EX; old-design fillers obsolete - fabricate locally	A
EDH-SQD-00099	QMB3606T	No replacement on QM interior (31 in.) built before 1961; QM 1961-1984: QMB362T; QW (38 in.) pre-1984: QMB362T + QMB306EX	A
EDH-SQD-00102	QMB3620	Pre-1961 interior: none; 1961-1984: QMB364; QW panelboard/switchboard also needs QMB-320-EX	A
EDH-SQD-00034	QMB363TW	Field-replaceable Series E1 parts listed in FAQ FA92305; see separate part records	A
EDH-SQD-00134	QMB3640	QM 1961-1984: QMB3400LA; QW: QMB3400LA + QMB310EX; QM pre-1961: none	C
EDH-SQD-00042	QMB367W	Field-replaceable Series E1 parts listed in FAQ FA92286; see separate part records	A

8.3 Companion parts required for installation

Part	Requires
ASPP6QD6D (EDH-GEA-00001)	139C5702AQDG1, 139C5702BQDG1, 139C5702CQDG1, 139C5500P81, 139C5503P64
ASPP6SE6D (EDH-GEA-00002)	139C5702ASEG1, 139C5702BSEG1, 139C5702CSEG1, 139C5500P82, 139C5503P77
ASPP6SF3S (EDH-GEA-00003)	139C5702ASFG1, 139C5702BSFG1, 139C5702CSFG1, 139C5500P84, 139C5503P90
ASPP6SG3S (EDH-GEA-00004)	315A7046P7, 315A7046P8, 315A7046P9, 139C5500P83, 139C5503P103
ASPP6FB6D (EDH-GEA-00005)	139C5702ASEG1, 139C5702BSEG1, 139C5702CSEG1, 139C5700P86, 139C5503P77
ASPP6QB6D (EDH-GEA-00006)	315A7049P10, 315A7048P20, 911E347P3, 139C5362P2
ASPP6QB12D (EDH-GEA-00007)	315A7049P10, 315A7048P20, 911E347P3, 139C5362P2
ASPP6EY6D (EDH-GEA-00008)	315A7049P10, 315A7048P20, 911E347P3, 139C5503P129

Part	Requires
ASPP6EY12D (EDH-GEA-00009)	315A7049P10, 315A7048P20, 911E347P3, 139C5503P129
AMCB4QDFP (EDH-GEA-00102)	AFP2QDD
AMCB6QDFP (EDH-GEA-00108)	AFP3QDD
AMC6EYFP (EDH-GEA-00146)	AFP3EYD
AMC6FBFP (EDH-GEA-00147)	AFP3FBD
AMC6EBFP (EDH-GEA-00149)	AFP3SED
AMC6QDFP (EDH-GEA-00150)	AFP3QDD
AMC6FJFPTF (EDH-GEA-00151)	AFP3TFD
AMC6FJFP (EDH-GEA-00152)	AFP3SFD
AMC6FGBFP (EDH-GEA-00154)	AFP4FGD
AMC6GBFP (EDH-GEA-00155)	AFP4SGD
AMC3FJFPTF (EDH-GEA-00159)	AFP3TFS
AMC3FJFP (EDH-GEA-00160)	AFP3SFS
AMC3FGMFP (EDH-GEA-00162)	AFP4FGS
AMC3GMFP (EDH-GEA-00163)	AFP4SGS
AMC3KMFP (EDH-GEA-00164)	AFP6SKS
AMC4EBFP (EDH-GEA-00167)	AFP2TED
AMC4SEFP (EDH-GEA-00168)	AFP3SED
AMC4QDFP (EDH-GEA-00169)	AFP2QDD
AMC4FJFPTF (EDH-GEA-00170)	AFP3TFD
AMC4FJFP (EDH-GEA-00171)	AFP3SFD
AMC4FGBFP (EDH-GEA-00173)	AFP4FGD
AMC4GBFP (EDH-GEA-00174)	AFP4SGD
AMC2FJFPTF (EDH-GEA-00178)	AFP3TFS
AMC2FJFP (EDH-GEA-00179)	AFP3SFS
AMC2FGMFP (EDH-GEA-00181)	AFP4FGS
AMC2GMFP (EDH-GEA-00182)	AFP4SGS
AMC2KMFP (EDH-GEA-00183)	AFP6SKS
TCAL61 (EDH-GEA-00304)	789A448G1
TC061 (EDH-GEA-00307)	789A448G1
TCAL81 (EDH-GEA-00308)	789A448G1
TC081A (EDH-GEA-00311)	789A448G1
TCAL121 (EDH-GEA-00312)	789A448G2
TC0121 (EDH-GEA-00315)	789A448G2
P1CONACPHCU (EDH-SIE-00088)	P1SCRWS
P1CONBPHAL (EDH-SIE-00089)	P1SCRWS
P1CONBPHCU (EDH-SIE-00090)	P1SCRWS
P1CONACPHAL (EDH-SIE-00097)	P1SCRWS
BBKVA5262P2S (EDH-SIE-00112)	BBKVA5262P2HW
BBKVA52P3T (EDH-SIE-00114)	BBKVA52P3HW
TC1Q1 (EDH-SIE-00245)	TNKG3
3TC1Q1 (EDH-SIE-00246)	TNKG3
3TC1GG20 (EDH-SIE-00248)	TNKG3
4051749901 (EDH-SQD-00159)	8011417101

9 Indexes

9.1 Manufacturer index

Code	Lineage	Brand markings	Families	Parts	Pg
EAT	Eaton lineage	Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant	26	460	14
SQD	Square D / Schneider Electric	Square D, Schneider Electric, Federal Pioneer (Canada)	5	176	225
GEA	GE / ABB lineage	General Electric Industrial Solutions; ABB from 2018; ReliaGear	9	395	295
SIE	Siemens lineage	Siemens, ITE, ITE Imperial, Gould, Murray	10	313	440

9.2 Equipment family index (including aliases)

Name / alias	Family	Mfr	Type	ID	Pg
5P	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-025	210
A Series	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
A-SERIES	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
A-Series Column Panelboards (ALC, AQC, AEC)	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	312
A-Series II	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
A-Series II Powerpanel	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	312
A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	312
A-SERIES-COL	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	312
A-SERIES-PWR	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	312
A2B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	50
ABH	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	50
AD	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
AD Plus	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
AD/AE/AQ Type P & N Power Panel	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	312
ADP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	312
AE	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
AEC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	312
AEF	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
AEP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	312

Name / alias	Family	Mfr	Type	ID	Pg
AL	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
ALC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	312
APN	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	336
APNB	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	336
AQ	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
AQC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	312
AQF	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
AQP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	312
AS	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
AV Line	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	396
AV-LINE	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	396
AV-Line	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	396
AV-Line switchboards (legacy)	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	396
BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-015	15
Bryant BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-015	15
CCB	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	325
CCB-QMR	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	325
CDP	Westinghouse CDP / HCDP panelboard	EAT	panelboard	FAM-EAT-007	19
CDP-5	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
CDP-6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
CDP/HCDP	Westinghouse CDP / HCDP panelboard	EAT	panelboard	FAM-EAT-007	19
CDP6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
CDP?	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	325
Challenger BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-015	15
Class 2110	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	225
Class 4620	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	235
Class II	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
column panelboard	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-024	51
CPD	Westinghouse CDP / HCDP panelboard	EAT	panelboard	FAM-EAT-007	19
Cutler-Hammer Type ES switchboard	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-003	218
ES	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-003	218
ES switchboard	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-003	218
F1	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	466

Name / alias	Family	Mfr	Type	ID	Pg
F2	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	481
FC-20	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
FC-I	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
FC-II	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
FC20	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
FCI	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
FCII	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
FCRS	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
FDP	Westinghouse FDP fusible panelboard	EAT	panelboard	FAM-EAT-008	44
FPP (10in)	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	466
FPP deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	481
HCDP	Westinghouse CDP / HCDP panelboard	EAT	panelboard	FAM-EAT-007	19
HCJ	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	225
HCM	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	225
HCN	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	225
HCP	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	225
HCP-SU	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	225
HCR-U	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	225
HCW	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	225
HWFB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	218
I Line	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	225
I-LINE	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	225
I-Line Circuit Breaker Panelboard / I-Line distribution section	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	225
IFS	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-006	218
IFS switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-006	218
ILine	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	225
Integrated Facility Switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-006	218
Integrated Facility System switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-006	218

Name / alias	Family	Mfr	Type	ID	Pg
Legacy QMB distribution (pre-October-1984 QM and QW interiors)	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	282
NA1B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	50
NAB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	50
NAB	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	330
NAB / NHB bolt-on panelboards (legacy)	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	330
NDP	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	50
NEB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	50
New Revised P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	499
NextGen P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	499
NH1B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	50
NHB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	50
NHB	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	330
NHDP	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	50
NHEB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	50
NLAB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	50
NLAB-AB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	50
NLAB-ABH	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	50
NLAB-LX	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	50
NLAB?	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	330
NPLAB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	50
NQB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	50
NQC	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	50
NQP	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	50
old style QMB	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	282
Original P1	Type P1 (original)	SIE	panelboard	FAM-SIE-002	440
P1	Type P1 (original)	SIE	panelboard	FAM-SIE-002	440
P1 (pre-2014/2015)	Type P1 (original)	SIE	panelboard	FAM-SIE-002	440
P1...N	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	499
P1...T	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	499
P2	Type P2 panelboard	SIE	panelboard	FAM-SIE-005	449
P3	Type P3 panelboard	SIE	panelboard	FAM-SIE-006	461
P4	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	466
P5	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	481
Pow-R-Command	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-026	51
Pow-R-Command lighting control panelboard	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-026	51
POW-R-LINE	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	51
Pow-R-Line 1	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	51
Pow-R-Line 1a	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-016	57
POW-R-LINE 1A	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-016	57
Pow-R-Line 1X	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-020	130

Name / alias	Family	Mfr	Type	ID	Pg
Pow-R-Line 2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	51
Pow-R-Line 2a	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-017	143
Pow-R-Line 2X	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-021	144
Pow-R-Line 3	Westinghouse Pow-R-Line 3 panelboard (vintage)	EAT	panelboard	FAM-EAT-010	144
Pow-R-Line 3a	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-018	146
Pow-R-Line 3E	Pow-R-Line 3E	EAT	panelboard	FAM-EAT-019	168
Pow-R-Line 3X	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-022	168
Pow-R-Line 4	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	178
Pow-R-Line 4 panelboard (PRL4B / PRL4F)	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	178
Pow-R-Line 4B	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	178
Pow-R-Line 4D	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	178
Pow-R-Line 4F	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	178
Pow-R-Line 4X	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-023	209
Pow-R-Line 5P	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-025	210
Pow-R-Line 5P plug-on distribution panelboard	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-025	210
POW-R-LINE C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-001	218
Pow-R-Line C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-001	218
Pow-R-Line C switchboard	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-001	218
Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-024	51
Pow-R-Line CS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-005	219
Pow-R-Line CS switchboard	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-005	219
Pow-R-Line I	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-004	220
Pow-R-Line i	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-004	220
Pow-R-Line i switchboard	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-004	220
Pow-R-Line Xpert	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-020	130
Pow-R-Line Xpert 1X	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-020	130
Pow-R-Line Xpert 2X	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-021	144
Pow-R-Line Xpert 3X	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-022	168
Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-023	209
Pow-R-Xpress PRL4X	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-023	209
Power-Style QED-2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	289
Power-Style QED-2 Switchboard	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	289
PRC	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-026	51
PRCE	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-026	51
PRL CS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-005	219
PRL i	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-004	220
PRL-1A	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-016	57
PRL-2A	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-017	143
PRL-3A	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-018	146
PRL-4	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	178
PRL-C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-001	218
PRL-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-024	51
PRL1	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	51
PRL1-LX	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	51

Name / alias	Family	Mfr	Type	ID	Pg
PRL1/PRL2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	51
PRL1A	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-016	57
PRL1a	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-016	57
PRL1a-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-024	51
PRL1X	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-020	130
PRL1x	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-020	130
PRL1X-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-024	51
PRL2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	51
PRL2A	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-017	143
PRL2a	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-017	143
PRL2a-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-024	51
PRL2X	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-021	144
PRL2x	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-021	144
PRL2X-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-024	51
PRL3	Westinghouse Pow-R-Line 3 panelboard (vintage)	EAT	panelboard	FAM-EAT-010	144
PRL3-LX	Westinghouse Pow-R-Line 3 panelboard (vintage)	EAT	panelboard	FAM-EAT-010	144
PRL3a	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-018	146
PRL3A	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-018	146
PRL3E	Pow-R-Line 3E	EAT	panelboard	FAM-EAT-019	168
PRL3e	Pow-R-Line 3E	EAT	panelboard	FAM-EAT-019	168
PRL3X	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-022	168
PRL3x	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-022	168
PRL4	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	178
PRL4B	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	178
PRL4D	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	178
PRL4DX	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-023	209
PRL4F	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	178
PRL4X	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	178
PRL4X	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-023	209
PRL4x	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-023	209
PRL5P	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-025	210
PRLC	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-001	218
PRLCS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-005	219
PRLi	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-004	220
Pro-Stock	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	295
QED 2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	289
QED-2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	289
QED-2 Series 2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	289
QED-2/S	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	289
QED2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	289
QM interior	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	282
QMB	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	235
QMB fusible	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	235

Name / alias	Family	Mfr	Type	ID	Pg
QMB Fusible Panelboard / QMB distribution (current design, Series E1)	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	235
QMB Saflex	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	282
QMB Series 1-4	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	282
QMB-LEGACY	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	282
QMB-QMJ	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	235
QMR	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	325
QW interior	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	282
ReliaGear neXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	331
ReliaGear neXT Power Panelboards	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	331
ReliaGear OEM neXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	331
Revised P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	499
RG-NEXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	331
RP1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	499
S1	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	532
S1/S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	532
S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	532
S4	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	466
S5	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	481
Saflex	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	282
Saflex panelboard	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	282
SB	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	547
SB1	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	547
SB2	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	547
SB3	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	547
SB4 (blank plates only)	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	547
SCP	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	331
SCP+	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	331
SCP-PLUS	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	331
SE	Type SE panelboard	SIE	panelboard	FAM-SIE-004	534
SE panels	Type SE panelboard	SIE	panelboard	FAM-SIE-004	534
Sentron Deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	481
Sentron S1	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	532
Sentron S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	532
Sentron SPP shallow	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	466
Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
Spectra	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	336
Spectra Bolt-On (SBO)	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	336

Name / alias	Family	Mfr	Type	ID	Pg
Spectra Plug-In	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	336
Spectra Series	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	336
Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	336
Spectra Series Type SCP Plus panelboards	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	331
SPECTRA-PP	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	336
SpectraRMS	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	336
Speed D	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-002	294
SPEED-D	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-002	294
Speed-D Merchandised Service Section Switchboard	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-002	294
SpeedD	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-002	294
SPP	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	466
SPP deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	481
SPP6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
Type 1 Pow-R-Line C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-001	218
Type BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-015	15
Type BR loadcenter	Type BR loadcenter	EAT	loadcenter	FAM-EAT-015	15
Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	325
Type ES	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-003	218
Type P1 (original)	Type P1 (original)	SIE	panelboard	FAM-SIE-002	440
Type P1 (Revised P1)	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	499
Type P2 panelboard	Type P2 panelboard	SIE	panelboard	FAM-SIE-005	449
Type P3 panelboard	Type P3 panelboard	SIE	panelboard	FAM-SIE-006	461
Type P4 / S4 / Sentron SPP (10in deep) power panelboard	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	466
Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	481
Type S1 / S2 lighting panelboards	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	532
Type SB1 / SB2 / SB3 distribution switchboards	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	547
Type SE panelboard	Type SE panelboard	SIE	panelboard	FAM-SIE-004	534
Type WF	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	220
Type WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	220
VB-5	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534
VB-6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	534

Name / alias	Family	Mfr	Type	ID	Pg
WCA	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	218
WEB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	218
WEHB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	218
Westinghouse CDP	Westinghouse CDP / HCDP panelboard	EAT	panelboard	FAM-EAT-007	19
Westinghouse CDP / HCDP panelboard	Westinghouse CDP / HCDP panelboard	EAT	panelboard	FAM-EAT-007	19
Westinghouse FDP	Westinghouse FDP fusible panelboard	EAT	panelboard	FAM-EAT-008	44
Westinghouse FDP fusible panelboard	Westinghouse FDP fusible panelboard	EAT	panelboard	FAM-EAT-008	44
Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	50
Westinghouse NLAB lighting panelboard	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	50
Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	51
Westinghouse Pow-R-Line 3 panelboard (vintage)	Westinghouse Pow-R-Line 3 panelboard (vintage)	EAT	panelboard	FAM-EAT-010	144
Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	218
Westinghouse WF/WRP switchboard	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	220
WF	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	220
WF/WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	220
WF/WRP switchboard	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	220
WFB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	218
WGB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	218
WGHB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	218
WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	220

9.3 Part-number index (primary and alternate numbers)

Sorted by normalised number (punctuation and spaces removed). Search a partial number by its leading characters.

Number	Type	Mfr	Description	Catalogue ID	Pg
0080429	primary	EAT	Panelboard trim lock — T-handle lock	EDH-EAT-00069	29
0080429	alias	EAT	T-handle lock	EDH-EAT-00449	128
114C247G01	primary	EAT	Panelboard trim lock — Lock used on lighting and small power panels as standard	EDH-EAT-00070	29
11-D-4554-01	alias	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	526
11-D-4560-01	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	525
12-1800-01	alias	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	526
12-1800-01	alias	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	547
1256C42G01	primary	EAT	BAB 2- and 3-pole lock-off	EDH-EAT-00460	130
1256C42G02	primary	EAT	BAB 1-pole lock-off	EDH-EAT-00459	130
12-A-1801-01	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	525
12-A-1802-01	supersedes	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	528
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)	EDH-EAT-00370	124

Number	Type	Mfr	Description	Catalogue ID	Pg
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)	EDH-EAT-00371	124
139C5362P2	primary	GEA	Deadfront filler plate (shield insert) - QB (A-Series II power panel)	EDH-GEA-00035	323
139C5500P81	primary	GEA	3P breaker support bracket (ASPP6QD6D)	EDH-GEA-00022	321
139C5500P82	primary	GEA	3P breaker support bracket (ASPP6SE6D)	EDH-GEA-00023	322
139C5500P83	primary	GEA	3P breaker support bracket (ASPP6SG3S)	EDH-GEA-00024	322
139C5500P84	primary	GEA	3P breaker support bracket (ASPP6SF3S)	EDH-GEA-00025	322
139C5503P103	primary	GEA	Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)	EDH-GEA-00033	324
139C5503P129	primary	GEA	Deadfront filler plate (shield insert) - TEY (A-Series II power panel)	EDH-GEA-00034	324
139C5503P64	primary	GEA	Deadfront filler plate (shield insert) - TQD (A-Series II power panel)	EDH-GEA-00030	324
139C5503P77	primary	GEA	Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)	EDH-GEA-00031	325
139C5503P90	primary	GEA	Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)	EDH-GEA-00032	325
139C5700P86	primary	GEA	3P breaker support bracket (ASPP6FB6D)	EDH-GEA-00026	322
139C5702AQDG1	primary	GEA	Branch base, A phase, TQD (A-Series II)	EDH-GEA-00010	317
139C5702ASEG1	primary	GEA	Branch base, A phase, SE/TED/FB (A-Series II)	EDH-GEA-00011	318
139C5702ASFG1	primary	GEA	Branch base, A phase, SF (A-Series II)	EDH-GEA-00012	318
139C5702BQDG1	primary	GEA	Branch base, B phase, TQD (A-Series II)	EDH-GEA-00013	318
139C5702BSEG1	primary	GEA	Branch base, B phase, SE/TED/FB (A-Series II)	EDH-GEA-00014	318
139C5702BSFG1	primary	GEA	Branch base, B phase, SF (A-Series II)	EDH-GEA-00015	319
139C5702CQDG1	primary	GEA	Branch base, C phase, TQD (A-Series II)	EDH-GEA-00016	319
139C5702CSEG1	primary	GEA	Branch base, C phase, SE/TED/FB (A-Series II)	EDH-GEA-00017	319
139C5702CSFG1	primary	GEA	Branch base, C phase, SF (A-Series II)	EDH-GEA-00018	319
139C5720G3	primary	GEA	A-Series AE front mounting kit	EDH-GEA-00090	310
139C5720G6	primary	GEA	A-Series AQ/AL front mounting kit	EDH-GEA-00091	310
139C5720G9	primary	GEA	A-Series AD front mounting kit	EDH-GEA-00092	310
1A32258H03	primary	EAT	Standard trim lock for PRL4X and PRL4 lighting and power panels	EDH-EAT-00447	208
1A85194G01	primary	EAT	EZ Trim lock keyed WEM-2	EDH-EAT-00451	128
1C96608	primary	EAT	PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00290	115
1C96608G01..G63 (odd item numbers)	style_number	EAT	PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00290	115
1C96609	primary	EAT	PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)	EDH-EAT-00292	144
1C96609G01..G63 (same G scheme as 1C96608)	style_number	EAT	PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)	EDH-EAT-00292	144
1C96619	primary	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)	EDH-EAT-00370	124
1C96620	primary	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)	EDH-EAT-00371	124
1C96638	primary	EAT	PRL1a/2a/1X/2X deadfront cover assembly	EDH-EAT-00361	124
1C96645	primary	EAT	PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 i	EDH-EAT-00355	116
1C96646	primary	EAT	PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (3	EDH-EAT-00343	117
1C96647	supersedes	EAT	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	EDH-EAT-00344	120
1C96647	primary	EAT	PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 d	EDH-EAT-00345	117
1C96648	primary	EAT	PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical	EDH-EAT-00346	117

Number	Type	Mfr	Description	Catalogue ID	Pg
1C96649	primary	EAT	PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% ne	EDH-EAT-00347	118
1C96650	supersedes	EAT	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00348	120
1C96650	primary	EAT	PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00349	118
1C96651	primary	EAT	PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mech	EDH-EAT-00350	118
1C96652	primary	EAT	PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral	EDH-EAT-00351	119
1C96653	supersedes	EAT	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A	EDH-EAT-00352	121
1C96653	primary	EAT	PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing	EDH-EAT-00353	119
1C96654	primary	EAT	PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mech	EDH-EAT-00354	119
1C97022	primary	EAT	PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 i	EDH-EAT-00356	120
1X H01; 2X H02; 3X H03; 4X H13; 5X H14; 6X H04; 7X H05; 9X H06; 10X H07; 11X H08; 12X H09; 13X H10; 15X H11; 20X H12	style_number	EAT	PRL4/PRL4X blank cover for 24 in wide box (1X-20X)	EDH-EAT-00411	208
2142720241	primary	SQD	QMB367W Series E1 renewal part: Load base mounting screw	EDH-SQD-00129	246
21427-20401	primary	SQD	QED cover screw 21427-20401	EDH-SQD-00163	292
2150720200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2150720200: Door leaf bolt (2 per set)	EDH-SQD-00169	293
2152620361	primary	SQD	FA/FH I-Line breaker mounting bracket screw 2152620361	EDH-SQD-00158	234
21590-20241	primary	SQD	PowerPact H/J I-Line mounting bracket screw 21590-20241	EDH-SQD-00157	234
21593-20100	primary	SQD	I-Line blank filler mounting screw 21593-20100	EDH-SQD-00145	234
225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	style_number	EAT	PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral	EDH-EAT-00351	119
2271020200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2271020200: Frame leaf bolt (2 per set	EDH-SQD-00168	293
2300100200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2300100200: Nut	EDH-SQD-00170	293
2330241601	primary	SQD	QMB363TW Series E1 renewal part: Push nut for arc suppression assembly	EDH-SQD-00120	246
2342702001	primary	SQD	QMB363TW Series E1 renewal part: Lug mounting nut	EDH-SQD-00125	246
2342702400	primary	SQD	QMB367W Series E1 renewal part: Lug mounting nut	EDH-SQD-00132	247
2370100200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2370100200: Washer	EDH-SQD-00171	293
286A8066G1	primary	GEA	GE 286A8066G1 lug cover, TH4V/THK9V	EDH-GEA-00331	417
2C11296	primary	EAT	Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)	EDH-EAT-00358	121
2C11641G02	primary	EAT	Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X	EDH-EAT-00452	129
2C11642	primary	EAT	PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00291	115
2C11642G03, G07, G11, G15 ... G59, G63 (silver-plated copper only)	style_number	EAT	PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00291	115
2NLK30A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	515
2NLK42A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	515

Number	Type	Mfr	Description	Catalogue ID	Pg
2NLK42B	primary	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	515
2NLK54A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00041	516
2NLK54B	primary	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00041	516
2TA2N8750	primary	SIE	Siemens 2TA2N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00281	566
2TA3N8750	primary	SIE	Siemens 2TA3N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00283	566
2TA4N8500	primary	SIE	Siemens 2TA4N8500 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00285	567
2TA4P8500	primary	SIE	Siemens 2TA4P8500 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00287	567
315A7046P7	primary	GEA	SG breaker strap, A phase (A-Series II)	EDH-GEA-00019	320
315A7046P8	primary	GEA	SG breaker strap, B phase (A-Series II)	EDH-GEA-00020	320
315A7046P9	primary	GEA	SG breaker strap, C phase (A-Series II)	EDH-GEA-00021	320
315A7048P20	primary	GEA	Center (B phase) strap (THQB/TEY, A-Series II)	EDH-GEA-00028	321
315A7049P10	primary	GEA	A & C phase 200A strap (THQB/TEY, A-Series II)	EDH-GEA-00027	321
3456B35H01	primary	EAT	PRL1/PRL2 blank cover 6.00 in high (style number)	EDH-EAT-00066	56
3456B99H01	primary	EAT	PRL1/PRL2 blank cover 3.00 in high (style number)	EDH-EAT-00065	56
3456B99H05	primary	EAT	PRL1/PRL2 blank cover 15.00 in high (style number)	EDH-EAT-00064	56
3457B16G01	primary	EAT	Panelboard trim lock — Lock used on lighting and small panels as standard	EDH-EAT-00071	29
3BRS225	primary	EAT	Type BR loadcenter main and subfeed lug block (3BRS225)	EDH-EAT-00119	16
3BRSF150	primary	EAT	Type BR loadcenter main and subfeed lug block (3BRSF150)	EDH-EAT-00118	16
3TA1QR300	primary	SIE	Siemens 3TA1QR300 lug kit (3), QR2 100-250A	EDH-SIE-00253	576
3TA2N8750	primary	SIE	Siemens 3TA2N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00282	567
3TA3N8750	primary	SIE	Siemens 3TA3N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00284	568
3TA4N8500	primary	SIE	Siemens 3TA4N8500 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00286	568
3TA4P8500	primary	SIE	Siemens 3TA4P8500 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00288	568
3TC1GG20	primary	SIE	Siemens 3TC1GG20 lug pack of 3, NGG/HGG/LGG 35-125A	EDH-SIE-00248	574
3TC1Q1	primary	SIE	Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A	EDH-SIE-00246	574
3TC1QR250	primary	SIE	Siemens 3TC1QR250 copper lug kit (3), QR2	EDH-SIE-00254	576
3TC1QR2520	alias	SIE	Siemens 3TC1QR250 copper lug kit (3), QR2	EDH-SIE-00254	576
3VA9233-0QA00	primary	SIE	3VA52 250A nut keeper kit (3)	EDH-SIE-00207	552
3VA9243-0QA00	primary	SIE	3VA61/62 150A/250A nut keeper kit (3)	EDH-SIE-00208	552
3VA9473-0QA00	primary	SIE	3VA5, 3VA6 400A/600A nut keeper kit (3)	EDH-SIE-00209	552
4020506501	primary	SQD	QMB363TW Series E1 renewal part: Load base mounting screw	EDH-SQD-00122	247
40251-016-51	primary	SQD	QMB/QMJ switch terminal lug 40251-016-51	EDH-SQD-00063	239
40251-018-50	primary	SQD	QMB/QMJ switch terminal lug 40251-018-50	EDH-SQD-00065	239
4025101851	primary	SQD	QMB363TW Series E1 renewal part: Lug assembly	EDH-SQD-00124	239
40251-162-50	primary	SQD	QMB/QMJ switch terminal lug 40251-162-50	EDH-SQD-00067	239
40251-287-50	primary	SQD	QMB/QMJ switch terminal lug 40251-287-50	EDH-SQD-00069	290
40256-014-50	primary	SQD	QMB/QMJ switch terminal lug 40256-014-50	EDH-SQD-00066	240
40256-034-50	primary	SQD	QMB/QMJ switch terminal lug 40256-034-50	EDH-SQD-00064	240
40256-039-50	primary	SQD	QMB/QMJ switch terminal lug 40256-039-50	EDH-SQD-00070	240
4028343250	primary	SQD	QMB367W Series E1 renewal part: Switch mounting hardware kit:	EDH-SQD-00133	245
4028343550	primary	SQD	QMB367W Series E1 renewal part: Handle knob kit	EDH-SQD-00131	245
4028343750	primary	SQD	QMB363TW Series E1 renewal part: Handle knob kit	EDH-SQD-00123	246
40517-407-01	style_number	SQD	I-Line blank filler HNM4BL	EDH-SQD-00138	233
40517-408-01	style_number	SQD	I-Line blank filler HNM1BL	EDH-SQD-00137	233

Number	Type	Mfr	Description	Catalogue ID	Pg
4051749901	primary	SQD	I-Line deadfront (trim) support bracket 4051749901	EDH-SQD-00159	229
4052017302	primary	SQD	QMB363TW Series E1 renewal part: Arc shield	EDH-SQD-00119	256
4052021450	primary	SQD	QMB363TW Series E1 renewal part: Arc suppressor assembly	EDH-SQD-00118	256
4052021650	primary	SQD	QMB363TW Series E1 renewal part: Load base assembly	EDH-SQD-00121	256
4052031850	primary	SQD	QMB367W Series E1 renewal part: Arc suppressor assembly	EDH-SQD-00126	256
4052036750	primary	SQD	QMB367W Series E1 renewal part: Load base assembly	EDH-SQD-00128	256
4052085601	primary	SQD	QMB367W Series E1 renewal part: Arc shield	EDH-SQD-00127	257
4052098601	primary	SQD	QMB367W Series E1 renewal part: Load base side insulator	EDH-SQD-00130	243
40560-270-50	primary	SQD	QMB/QMJ switch terminal lug 40560-270-50	EDH-SQD-00068	241
414A380G01	primary	EAT	Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)	EDH-EAT-00074	57
414A380G02	primary	EAT	Replacement panelboard trim clamp, 2.50 in (CDP, FDP, NQB)	EDH-EAT-00073	31
4176B51	primary	EAT	PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)	EDH-EAT-00381	159
4176B56	primary	EAT	PRL3a/3X deadfront device cover: LCL vertical cover 21X	EDH-EAT-00384	159
4176B57	primary	EAT	PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only	EDH-EAT-00383	159
4176B60	primary	EAT	PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)	EDH-EAT-00379	159
4176B61	primary	EAT	PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)	EDH-EAT-00380	160
4176B66	primary	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3	EDH-EAT-00395	160
4176B67	primary	EAT	PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP	EDH-EAT-00397	160
4176B68	supersedes	EAT	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH,	EDH-EAT-00375	164
4176B68	primary	EAT	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (P	EDH-EAT-00387	160
4176B69	primary	EAT	PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cov	EDH-EAT-00398	161
4176B70	primary	EAT	PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cove	EDH-EAT-00382	161
4176B72	primary	EAT	PRL3a/3X neutral / blank cover 1X-12X	EDH-EAT-00389	166
4176B79	primary	EAT	PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X	EDH-EAT-00385	161
4176B80	primary	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3	EDH-EAT-00396	161
4178B06H01	supersedes	EAT	PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019	EDH-EAT-00405	167
4178B06H01	primary	EAT	PRL3a F-frame 1-pole provision filler (panels built before April 2019)	EDH-EAT-00406	167
4178B08	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3	EDH-EAT-00390	164
4178B08	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horiz	EDH-EAT-00400	162
4179B39	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizo	EDH-EAT-00391	165
4179B39	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horiz	EDH-EAT-00401	162
4179B40	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizont	EDH-EAT-00392	165
4179B40	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizon	EDH-EAT-00402	162
4179B41	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00394	166
4179B41	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00403	162
4179B42	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00393	165

Number	Type	Mfr	Description	Catalogue ID	Pg
4179B42	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00404	163
4180B03	supersedes	EAT	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device co	EDH-EAT-00362	126
4180B03	primary	EAT	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-202	EDH-EAT-00365	125
4180B04	primary	EAT	PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover	EDH-EAT-00368	125
4180B05	supersedes	EAT	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	EDH-EAT-00364	126
4180B05	primary	EAT	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	EDH-EAT-00367	125
4180B08	primary	EAT	PRL1a/2a/1X/2X deadfront blank covers 1-16 in	EDH-EAT-00369	127
4180B52H01	primary	EAT	PRL1a/2a filler cover for F, J, K frame vertical device spaces	EDH-EAT-00372	127
4180B61	supersedes	EAT	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device co	EDH-EAT-00363	126
4180B61	primary	EAT	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-202	EDH-EAT-00366	125
4180B62	primary	EAT	PRL1a/2a/1X/2X service entrance bonding jumper kit	EDH-EAT-00341	129
4180B79	primary	EAT	PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt swit	EDH-EAT-00386	163
4180B91	primary	EAT	PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover	EDH-EAT-00399	163
4180B93	supersedes	EAT	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL	EDH-EAT-00376	164
4180B93	primary	EAT	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2	EDH-EAT-00388	163
42C1129H02	primary	EAT	Chassis mounting hardware, PRL1a/2a/3a	EDH-EAT-00455	129
42C4050	primary	EAT	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	EDH-EAT-00344	120
42C4051	primary	EAT	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00348	120
42C4052	primary	EAT	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A	EDH-EAT-00352	121
42C7980	primary	EAT	PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)	EDH-EAT-00377	178
42C7982	primary	EAT	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	EDH-EAT-00364	126
42C7982	superseded_by	EAT	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	EDH-EAT-00367	125
42C8055	primary	EAT	PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock	EDH-EAT-00378	178
42C8072	primary	EAT	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device co	EDH-EAT-00362	126
42C8072	superseded_by	EAT	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-202	EDH-EAT-00365	125
42C8073	primary	EAT	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device co	EDH-EAT-00363	126
42C8073	superseded_by	EAT	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-202	EDH-EAT-00366	125
42C8076	primary	EAT	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH,	EDH-EAT-00375	164
42C8076	superseded_by	EAT	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (P	EDH-EAT-00387	160
42C8077	primary	EAT	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL	EDH-EAT-00376	164
42C8077	superseded_by	EAT	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2	EDH-EAT-00388	163
42C8078	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3	EDH-EAT-00390	164

Number	Type	Mfr	Description	Catalogue ID	Pg
42C8078	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horiz	EDH-EAT-00400	162
42C8079	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizo	EDH-EAT-00391	165
42C8079	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horiz	EDH-EAT-00401	162
42C8080	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizont	EDH-EAT-00392	165
42C8080	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizon	EDH-EAT-00402	162
42C8081	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00393	165
42C8081	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00404	163
42C8082	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00394	166
42C8082	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00403	162
42C8083H01	primary	EAT	PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019	EDH-EAT-00405	167
42C8083H01	superseded_by	EAT	PRL3a F-frame 1-pole provision filler (panels built before April 2019)	EDH-EAT-00406	167
42NLK30A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	516
42NLK42A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	516
42NLK54A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	516
42NLK54B	primary	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	516
4 ckt 2X H01; 8/4X H02; ... 32/16X H08	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizo	EDH-EAT-00391	165
4MLKA1	equivalent	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00019	508
4MLKA1	primary	SIE	Original P1 400A main lug kit, 1-ph	EDH-SIE-00029	446
4MLKA1A	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00019	508
4MLKA1B	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00023	508
4MLKA3	equivalent	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00020	509
4MLKA3	primary	SIE	Original P1 400A main lug kit, 3-ph	EDH-SIE-00030	446
4MLKA3A	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00020	509
4MLKA3B	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00024	509
4MLKC1	equivalent	SIE	Revised P1 400A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00021	510
4MLKC1	primary	SIE	Original P1 400A main lug kit, 1-ph	EDH-SIE-00031	446
4MLKC1A	primary	SIE	Revised P1 400A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00021	510
4MLKC3	equivalent	SIE	Revised P1 400A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00022	510
4MLKC3	primary	SIE	Original P1 400A main lug kit, 3-ph	EDH-SIE-00032	447
4MLKC3A	primary	SIE	Revised P1 400A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00022	510
50552-108-01	primary	SQD	NEMA 3R QED-2 switchboard replacement door handle 50552-108-01	EDH-SQD-00164	294
5078A98	primary	EAT	PRL3a/PRL3X service entrance bonding jumper kit	EDH-EAT-00342	168
5081A08G02	primary	EAT	PRL4 chassis mounting hardware	EDH-EAT-00456	209
5081A09G02	primary	EAT	PRL4 gutter cover mounting hardware	EDH-EAT-00457	209
5155C62H01	primary	EAT	QUICKLAG / GB / GHB 1-pole filler (branch space filler)	EDH-EAT-00373	127
5155C81G01	primary	EAT	Panelboard trim lock — Present-day lock used on standard PRL1, 2 and 3	EDH-EAT-00072	30
5155C81G03	primary	EAT	EZ Trim lock, 24-48 in	EDH-EAT-00450	128
5156C09	primary	EAT	Vintage PRL2 branch section deadfront cover	EDH-EAT-00410	55
5156C10	primary	EAT	Vintage PRL1 branch section deadfront cover	EDH-EAT-00409	56
5157C83G06	primary	EAT	Trim screws	EDH-EAT-00453	129
5158C03	primary	EAT	Vintage PRL1/PRL2 neutral bar, 100 A and 225 A	EDH-EAT-00360	53

Number	Type	Mfr	Description	Catalogue ID	Pg
5158C03G01	primary	EAT	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00056	53
5158C03G02	primary	EAT	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00055	54
5158C03G03	primary	EAT	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00058	54
5158C03G04	primary	EAT	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00057	54
5158C04G01	primary	EAT	PRL1/PRL2 400/600 A neutral bar (Westinghouse style number)	EDH-EAT-00059	54
5158C05	primary	EAT	Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)	EDH-EAT-00357	122
5158C05G01	primary	EAT	PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)	EDH-EAT-00061	55
5158C05G02	primary	EAT	PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)	EDH-EAT-00060	55
5158C05G05	primary	EAT	PRL1/PRL2/PRL3 isolated ground bar, boxes less than 30.00 in high (style number)	EDH-EAT-00063	55
5158C05G06	primary	EAT	PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)	EDH-EAT-00062	55
5158C05G06 (boxes 30 in and above)	style_number	EAT	PRL1/PRL2/PRL3 isolated ground bar, boxes less than 30.00 in high (style number)	EDH-EAT-00063	55
5PCGBLD600S	primary	EAT	PRL5P grounded B-phase adapter kit, 600 A LD main breaker, single bus	EDH-EAT-00442	216
5PCGBLUG1200T	primary	EAT	PRL5P grounded B-phase adapter kit, 1200 A main lugs, double bus	EDH-EAT-00445	216
5PCGBLUG400S	primary	EAT	PRL5P grounded B-phase adapter kit, 400 A main lugs, single bus	EDH-EAT-00440	217
5PCGBLUG600S	primary	EAT	PRL5P grounded B-phase adapter kit, 600 A main lugs, single bus	EDH-EAT-00441	217
5PCGBLUG800S	primary	EAT	PRL5P grounded B-phase adapter kit, 800 A main lugs, single bus	EDH-EAT-00443	217
5PCGBMD800T	primary	EAT	PRL5P grounded B-phase adapter kit, 800 A MD main breaker, double bus	EDH-EAT-00444	217
5PCGBND1200T	primary	EAT	PRL5P grounded B-phase adapter kit, 1200 A ND main breaker, double bus	EDH-EAT-00446	217
5PFP1S	primary	EAT	PRL5P 1X deadfront filler plate, single-bus chassis	EDH-EAT-00428	213
5PFP1T	primary	EAT	PRL5P 1X deadfront filler plate, double-bus chassis	EDH-EAT-00429	213
5PFP2S	primary	EAT	PRL5P 2X deadfront filler plate, single-bus chassis	EDH-EAT-00430	213
5PFP2T	primary	EAT	PRL5P 2X deadfront filler plate, double-bus chassis	EDH-EAT-00431	214
5PFP3S	primary	EAT	PRL5P 3X deadfront filler plate, single-bus chassis	EDH-EAT-00432	214
5PFP3T	primary	EAT	PRL5P 3X deadfront filler plate, double-bus chassis	EDH-EAT-00433	214
5PFP4S	primary	EAT	PRL5P 4X deadfront filler plate, single-bus chassis	EDH-EAT-00434	214
5PFP4T	primary	EAT	PRL5P 4X deadfront filler plate, double-bus chassis	EDH-EAT-00435	215
5PFP5S	primary	EAT	PRL5P 5X deadfront filler plate, single-bus chassis	EDH-EAT-00436	215
5PFP5T	primary	EAT	PRL5P 5X deadfront filler plate, double-bus chassis	EDH-EAT-00437	215
5PFP6S	primary	EAT	PRL5P 6X deadfront filler plate, single-bus chassis	EDH-EAT-00438	215
5PFP6T	primary	EAT	PRL5P 6X deadfront filler plate, double-bus chassis	EDH-EAT-00439	216
5PG1200A	primary	EAT	PRL5P 1200 A ground bar, Al/Cu	EDH-EAT-00426	212
5PG1200C	primary	EAT	PRL5P 1200 A ground bar, copper	EDH-EAT-00427	212
5PLUG31200TC	primary	EAT	PRL5P 600-1200 A lug unit, double-bus chassis	EDH-EAT-00421	210
5PLUG3400SC	primary	EAT	PRL5P 400 A main/through-feed lug unit, single-bus chassis	EDH-EAT-00418	210
5PLUG3600SC	primary	EAT	PRL5P 600 A lug unit, single-bus chassis	EDH-EAT-00419	211
5PLUG3800SC	primary	EAT	PRL5P 800 A lug unit, single-bus chassis	EDH-EAT-00420	211
5PN1200A	primary	EAT	PRL5P 1200 A neutral assembly, Al/Cu	EDH-EAT-00424	211
5PN1200C	primary	EAT	PRL5P 1200 A neutral assembly, copper	EDH-EAT-00425	211
5PN800A	primary	EAT	PRL5P 800 A neutral assembly, Al/Cu, (4) 250-500 kcmil	EDH-EAT-00422	212

Number	Type	Mfr	Description	Catalogue ID	Pg
5PN800C	primary	EAT	PRL5P 800 A neutral assembly, copper, (4) 250-500 kcmil	EDH-EAT-00423	212
6554C01	primary	EAT	PRL4/PRL4X blank cover for 24 in wide box (1X-20X)	EDH-EAT-00411	208
6554C02	primary	EAT	PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)	EDH-EAT-00412	208
6555C40H01	primary	EAT	PRL3a C-frame (CA/CAH/HCA) 2-pole deadfront blank filler	EDH-EAT-00407	167
6555C41H01	primary	EAT	PRL3a C-frame (CA/CAH/HCA) 3-pole deadfront blank filler	EDH-EAT-00408	167
6559C59	primary	EAT	PRL3a/3X deadfront assembly frame (rails and end covers)	EDH-EAT-00374	166
6572C746G01	primary	EAT	PRL4 standard ground bus	EDH-EAT-00359	207
6574C74	primary	EAT	PRL4 vented cover assembly (side rails + top/bottom vented covers)	EDH-EAT-00415	207
6BL2C	primary	SIE	6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)	EDH-SIE-00201	536
6 ckt 3X H01; 12/5X H02; 18/8X H03; 24/10X H04	style_number	EAT	PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cov	EDH-EAT-00398	161
6 ckt 3X H01; 12/6X H02; 18/9X H03; 24/12X H04; 30/15X H05; 36/18X H06; 42/21X H07; 48/24X H08	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3	EDH-EAT-00390	164
6 ckt 3X H01; 12 ckt 5X H02; 18 ckt 8X H03; 24 ckt 10X H04	style_number	EAT	PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP	EDH-EAT-00397	160
6CLE2	primary	SIE	6CLE2 connecting strap kit - CED (3.75in, twin)	EDH-SIE-00155	482
6CLF1	primary	SIE	6CLF1 connecting strap kit - CFD6 (5in, single)	EDH-SIE-00191	537
6CLF1C	alias	SIE	6CLF1 connecting strap kit - CFD6 (5in, single)	EDH-SIE-00191	537
6CLJ1	primary	SIE	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	EDH-SIE-00194	538
6CLJ1C	alias	SIE	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	EDH-SIE-00194	538
6CLL1	primary	SIE	6CLL1 connecting strap kit - CLD6 (8.75in, single)	EDH-SIE-00198	539
6CLL1C	alias	SIE	6CLL1 connecting strap kit - CLD6 (8.75in, single)	EDH-SIE-00198	539
6E62	primary	SIE	6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)	EDH-SIE-00188	540
6F62	primary	SIE	6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)	EDH-SIE-00190	540
6FPB01	primary	SIE	6FPB01 blank plate, 1.25in unit space	EDH-SIE-00211	478
6FPB02	primary	SIE	6FPB02 blank plate, 2.5in unit space	EDH-SIE-00212	479
6FPB03	primary	SIE	6FPB03 blank plate, 3.75in unit space	EDH-SIE-00213	479
6FPB05	primary	SIE	6FPB05 blank plate, 5in unit space	EDH-SIE-00214	479
6FPB10	primary	SIE	6FPB10 blank plate, 10in unit space	EDH-SIE-00215	480
6FPB15	primary	SIE	6FPB15 blank plate, 15in unit space	EDH-SIE-00216	551
6JJ61	primary	SIE	6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single	EDH-SIE-00192	541
6JJ62	primary	SIE	6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)	EDH-SIE-00193	541
6LL61	primary	SIE	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	EDH-SIE-00197	542
6LL61C	alias	SIE	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	EDH-SIE-00197	542
6M61C	primary	SIE	6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)	EDH-SIE-00203	543
6N61C	primary	SIE	6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)	EDH-SIE-00204	543
6QJ2	primary	SIE	6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)	EDH-SIE-00189	544
6QR2	primary	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	483
6QR2CAN	alias	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	483
6QR2CCAN	alias	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	483
6SCJ1	primary	SIE	6SCJ1 connecting strap kit - SCJD6 (8.75in, single)	EDH-SIE-00196	544
6SCL1	primary	SIE	6SCL1 connecting strap kit - SCLD6 (8.75in, single)	EDH-SIE-00200	545
6SCL61C	primary	SIE	6SCL61C connecting strap kit - SCJD6 (8.75in, single)	EDH-SIE-00202	545
6SJL1	primary	SIE	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	EDH-SIE-00195	546
6SJL1C	alias	SIE	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	EDH-SIE-00195	546

Number	Type	Mfr	Description	Catalogue ID	Pg
6SLL1	primary	SIE	6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)	EDH-SIE-00199	546
7494A11G02	primary	EAT	Vintage Fastrim trim clamps for B10B and PRL1/2/3	EDH-EAT-00458	57
7499A48G04	primary	EAT	Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X	EDH-EAT-00454	130
75C145005G703	primary	GEA	QMR panelboard filler plate 3X	EDH-GEA-00275	329
75C145005G711	primary	GEA	CCB panelboard filler plate 2X	EDH-GEA-00270	329
75C145005G715	primary	GEA	CCB panelboard filler plate 6X	EDH-GEA-00271	329
789A448G1	primary	GEA	GE 789A448G1 lug cover, TKM (for TC061/TCAL61/TCAL81/TC081A)	EDH-GEA-00328	417
789A448G2	primary	GEA	GE 789A448G2 lug cover, TKM (for TC0121/TCAL121)	EDH-GEA-00329	418
789A448G3	primary	GEA	GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain	EDH-GEA-00330	418
789A448G377 (as printed)	alias	GEA	GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain	EDH-GEA-00330	418
8000602001	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602001: Hinge pin	EDH-SQD-00167	293
8000602003	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602003: Hinge frame leaf	EDH-SQD-00165	292
80025-067-01	supersedes	SQD	Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)	EDH-SQD-00161	234
80031-024-02	primary	SQD	QED plug-button for unused holes 80031-024-02	EDH-SQD-00162	294
80034-187-02	style_number	SQD	I-Line blank extension HLW1BL	EDH-SQD-00142	231
80034-188-03	style_number	SQD	I-Line blank extension HLW4BL	EDH-SQD-00143	232
8011417101	primary	SQD	Slotted Roberts-head screw 8011417101 for I-Line deadfront bracket	EDH-SQD-00160	234
80121-651-01	style_number	SQD	I-Line blank extension HLN1BL	EDH-SQD-00139	230
80121-652-01	style_number	SQD	I-Line blank extension HLN4BL	EDH-SQD-00140	230
80121-653-01	style_number	SQD	I-Line blank extension HLW4EBL	EDH-SQD-00144	232
80121-752-01	style_number	SQD	I-Line blank extension HLN4EBL	EDH-SQD-00141	231
8023317701	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 8023317701: Hinge door leaf	EDH-SQD-00166	292
8450C62H39	primary	EAT	Panelboard trim lock — Trim lock for right-handed door (hinged on right side)	EDH-EAT-00068	30
8450C62H39	equivalent	EAT	Trim lock for right-handed door	EDH-EAT-00448	128
8712C73H01	primary	EAT	Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3	EDH-EAT-00075	57
911E347P3	primary	GEA	3X branch base (THQB/TEY, A-Series II)	EDH-GEA-00029	323
ACSFPKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	332
ACSFPKSK	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	332
ACSHKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	332
ACSHKSK	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	332
ACSMKSG	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	332
ACSMKSK	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	332
ACTFPKEB1P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	332
ACTFPKEB2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	333
ACTFPKEB3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	333
ACTFPKJD	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	333
ACTFPKQD2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	334

Number	Type	Mfr	Description	Catalogue ID	Pg
ACTFPKQD3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	334
ACTFPKSE	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	334
ACTFPKSF	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	335
ACTFPKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	335
ACTHKEB1P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	332
ACTHKEB2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	333
ACTHKEB3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	333
ACTHKJD	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	333
ACTHKQD2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	334
ACTHKQD3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	334
ACTHKSE	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	334
ACTHKSF	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	335
ACTHKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	335
ACTMKEB1P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	332
ACTMKEB2P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	333
ACTMKEB3P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	333
ACTMKJD	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	333
ACTMKQD2P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	334
ACTMKQD3P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	334
ACTMKSE	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	334
ACTMKSF	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	335
ACTMKSG	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	335
AEG10	primary	GEA	Spectra equipment ground kit AEG10	EDH-GEA-00236	381
AEG21	primary	GEA	Spectra equipment ground kit AEG21	EDH-GEA-00237	381
AEG21S	primary	GEA	Spectra equipment ground kit AEG21S	EDH-GEA-00238	381
AEG31S	primary	GEA	Spectra equipment ground kit AEG31S	EDH-GEA-00239	382
AEG47	primary	GEA	Spectra equipment ground kit AEG47	EDH-GEA-00240	382
AEG47S	primary	GEA	Spectra equipment ground kit AEG47S	EDH-GEA-00241	382
AFL120	primary	GEA	Spectra feed-thru lug cover plate kit AFL120	EDH-GEA-00243	341
AFL600	primary	GEA	Spectra feed-thru lug cover plate kit AFL600	EDH-GEA-00242	341
AFP2FBD	primary	GEA	Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)	EDH-GEA-00131	383
AFP2QDD	primary	GEA	Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)	EDH-GEA-00128	384
AFP2TED	primary	GEA	Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)	EDH-GEA-00129	384
AFP3EYD	primary	GEA	Spectra breaker filler plate kit AFP3EYD (TEY, dual)	EDH-GEA-00130	384
AFP3FBD	primary	GEA	Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)	EDH-GEA-00132	385

Number	Type	Mfr	Description	Catalogue ID	Pg
AFP3QDD	primary	GEA	Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)	EDH-GEA-00133	385
AFP3SED	primary	GEA	Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, du	EDH-GEA-00134	385
AFP3SFD	primary	GEA	Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)	EDH-GEA-00135	385
AFP3SFS	primary	GEA	Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)	EDH-GEA-00139	386
AFP3TFD	primary	GEA	Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)	EDH-GEA-00136	386
AFP3TFS	primary	GEA	Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)	EDH-GEA-00140	386
AFP4FGD	primary	GEA	Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)	EDH-GEA-00137	386
AFP4FGS	primary	GEA	Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)	EDH-GEA-00141	387
AFP4SGD	primary	GEA	Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)	EDH-GEA-00138	387
AFP4SGS	primary	GEA	Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)	EDH-GEA-00142	387
AFP5LCS	primary	GEA	Spectra breaker filler plate kit AFP5LCS (SKP, single)	EDH-GEA-00143	387
AFP6SKS	primary	GEA	Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)	EDH-GEA-00144	388
AHKBE1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)	EDH-GEA-00194	392
AHKBF1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)	EDH-GEA-00195	393
AHKBFB1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)	EDH-GEA-00200	393
AHKBFD1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)	EDH-GEA-00198	393
AHKBFG1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)	EDH-GEA-00199	393
AHKBG1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)	EDH-GEA-00196	393
AHKBQ1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)	EDH-GEA-00197	393
AHKE1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKE1	EDH-GEA-00185	394
AHKEL1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKEL1	EDH-GEA-00186	394
AHKF1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKF1	EDH-GEA-00187	394
AHKFD1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKFD1	EDH-GEA-00192	394
AHKFG1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKFG1	EDH-GEA-00193	395
AHKG1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKG1	EDH-GEA-00188	395
AHKJ1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKJ1	EDH-GEA-00189	395
AHKLB1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKLB1	EDH-GEA-00190	395
AHKQ1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKQ1	EDH-GEA-00191	396
AL150HD	primary	SQD	Standard aluminum mechanical lug kit AL150HD (HD/HG 15-150 A)	EDH-SQD-00082	236
AL175JD	primary	SQD	Standard aluminum mechanical lug kit AL175JD (JD/JG 150-175 A)	EDH-SQD-00083	236
AL250JD	primary	SQD	Standard aluminum mechanical lug kit AL250JD (JD/JG 200-250 A)	EDH-SQD-00084	237
AL400LA	primary	SQD	Standard aluminum mechanical lug kit AL400LA (LA 125-400 A)	EDH-SQD-00085	237
AMC2FGM	alias	GEA	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00181	359
AMC2FGMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00181	359
AMC2FJ	alias	GEA	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00179	359
AMC2FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00179	359

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC2FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00178	360
AMC2FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00178	360
AMC2FLS	alias	GEA	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00184	360
AMC2FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00184	360
AMC2GM	alias	GEA	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00182	361
AMC2GMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00182	361
AMC2JK	alias	GEA	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00180	362
AMC2JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00180	362
AMC2KM	alias	GEA	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00183	362
AMC2KMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00183	362
AMC3FGM	alias	GEA	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00162	363
AMC3FGMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00162	363
AMC3FJ	alias	GEA	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00160	363
AMC3FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00160	363
AMC3FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00159	364
AMC3FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00159	364
AMC3FLS	alias	GEA	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00165	364
AMC3FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00165	364
AMC3GM	alias	GEA	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00163	365
AMC3GMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00163	365
AMC3JK	alias	GEA	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00161	365
AMC3JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00161	365
AMC3KM	alias	GEA	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00164	366
AMC3KMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00164	366
AMC4EB	alias	GEA	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	EDH-GEA-00167	366
AMC4EBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	EDH-GEA-00167	366
AMC4EBS	alias	GEA	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00176	367
AMC4EBSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00176	367
AMC4FDB	alias	GEA	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00166	367
AMC4FDBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00166	367

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC4FDS	alias	GEA	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00175	368
AMC4FDSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00175	368
AMC4FGB	alias	GEA	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double br	EDH-GEA-00173	368
AMC4FGBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double br	EDH-GEA-00173	368
AMC4FJ	alias	GEA	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00171	369
AMC4FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00171	369
AMC4FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00170	370
AMC4FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00170	370
AMC4FLS	alias	GEA	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00177	370
AMC4FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00177	370
AMC4GB	alias	GEA	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00174	371
AMC4GBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00174	371
AMC4JK	alias	GEA	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00172	371
AMC4JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00172	371
AMC4QD	alias	GEA	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	EDH-GEA-00169	372
AMC4QDFP	primary	GEA	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	EDH-GEA-00169	372
AMC4SE	alias	GEA	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED;	EDH-GEA-00168	373
AMC4SEFP	primary	GEA	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED;	EDH-GEA-00168	373
AMC6EB	alias	GEA	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SE	EDH-GEA-00149	373
AMC6EBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SE	EDH-GEA-00149	373
AMC6EBS	alias	GEA	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00157	374
AMC6EBSFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00157	374
AMC6EY	alias	GEA	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	EDH-GEA-00146	374
AMC6EYFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	EDH-GEA-00146	374
AMC6FB	alias	GEA	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double bra	EDH-GEA-00147	375
AMC6FBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double bra	EDH-GEA-00147	375
AMC6FDB	alias	GEA	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00148	375
AMC6FDBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00148	375
AMC6FDSPF	primary	GEA	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00156	376
AMC6FDSPF	alias	GEA	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00156	376

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC6FGB	alias	GEA	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double br	EDH-GEA-00154	376
AMC6FGBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double br	EDH-GEA-00154	376
AMC6FJ	alias	GEA	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00152	377
AMC6FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00152	377
AMC6FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00151	377
AMC6FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00151	377
AMC6FLS	alias	GEA	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00158	378
AMC6FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00158	378
AMC6GB	alias	GEA	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00155	378
AMC6GBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00155	378
AMC6JK	alias	GEA	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00153	379
AMC6JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00153	379
AMC6QB	alias	GEA	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	EDH-GEA-00145	379
AMC6QBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	EDH-GEA-00145	379
AMC6QD	alias	GEA	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	EDH-GEA-00150	380
AMC6QDFP	primary	GEA	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	EDH-GEA-00150	380
AMCB2FGM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00119	342
AMCB2FGMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00119	342
AMCB2FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P singl	EDH-GEA-00117	343
AMCB2FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P singl	EDH-GEA-00117	343
AMCB2FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P si	EDH-GEA-00118	343
AMCB2FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P si	EDH-GEA-00118	343
AMCB2GM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P singl	EDH-GEA-00120	344
AMCB2GMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P singl	EDH-GEA-00120	344
AMCB2KM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00126	344
AMCB2KMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00126	344
AMCB3FGM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00123	345
AMCB3FGMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00123	345
AMCB3FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P singl	EDH-GEA-00121	345
AMCB3FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P singl	EDH-GEA-00121	345

Number	Type	Mfr	Description	Catalogue ID	Pg
AMCB3FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P si	EDH-GEA-00122	346
AMCB3FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P si	EDH-GEA-00122	346
AMCB3GM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P singl	EDH-GEA-00124	346
AMCB3GMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P singl	EDH-GEA-00124	346
AMCB3KM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00127	347
AMCB3KMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00127	347
AMCB3LB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	EDH-GEA-00125	347
AMCB3LBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	EDH-GEA-00125	347
AMCB4EB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	EDH-GEA-00098	348
AMCB4EBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	EDH-GEA-00098	348
AMCB4EY	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	EDH-GEA-00099	348
AMCB4EYFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	EDH-GEA-00099	348
AMCB4FB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P	EDH-GEA-00100	349
AMCB4FBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P	EDH-GEA-00100	349
AMCB4FDB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00101	349
AMCB4FDBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00101	349
AMCB4FGB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00113	349
AMCB4FGBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00113	349
AMCB4FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	EDH-GEA-00109	350
AMCB4FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	EDH-GEA-00109	350
AMCB4FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P du	EDH-GEA-00111	350
AMCB4FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P du	EDH-GEA-00111	350
AMCB4GB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	EDH-GEA-00114	351
AMCB4GBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	EDH-GEA-00114	351
AMCB4QD	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	EDH-GEA-00102	351
AMCB4QDFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	EDH-GEA-00102	351
AMCB4SE	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SE	EDH-GEA-00103	352
AMCB4SEFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SE	EDH-GEA-00103	352
AMCB6EB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SE	EDH-GEA-00104	352
AMCB6EBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SE	EDH-GEA-00104	352

Number	Type	Mfr	Description	Catalogue ID	Pg
AMCB6EY	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	EDH-GEA-00105	353
AMCB6EYFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	EDH-GEA-00105	353
AMCB6FB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P	EDH-GEA-00106	353
AMCB6FBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P	EDH-GEA-00106	353
AMCB6FDB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00107	354
AMCB6FDBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00107	354
AMCB6FGB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00115	354
AMCB6FGBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00115	354
AMCB6FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	EDH-GEA-00110	355
AMCB6FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	EDH-GEA-00110	355
AMCB6FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P du	EDH-GEA-00112	355
AMCB6FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P du	EDH-GEA-00112	355
AMCB6GB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	EDH-GEA-00116	356
AMCB6GBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	EDH-GEA-00116	356
AMCB6QD	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	EDH-GEA-00108	356
AMCB6QDFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	EDH-GEA-00108	356
AMCB6TEDL	primary	GEA	Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter	EDH-GEA-00244	388
AML3120CFP	primary	GEA	Spectra main lug module AML3120CFP (1200 A compression)	EDH-GEA-00231	337
AML3120FP	primary	GEA	Spectra main lug module AML3120FP (1200 A mechanical)	EDH-GEA-00226	337
AML3250CFP	primary	GEA	Spectra main lug module AML3250CFP (250 A compression)	EDH-GEA-00227	338
AML3250FP	primary	GEA	Spectra main lug module AML3250FP (250 A mechanical)	EDH-GEA-00220	338
AML3250SFP	primary	GEA	Spectra main lug module AML3250SFP (250 A mechanical)	EDH-GEA-00219	338
AML3400CFP	primary	GEA	Spectra main lug module AML3400CFP (400 A compression)	EDH-GEA-00228	338
AML3400FP	primary	GEA	Spectra main lug module AML3400FP (400 A mechanical)	EDH-GEA-00222	339
AML3400SFP	primary	GEA	Spectra main lug module AML3400SFP (400 A mechanical)	EDH-GEA-00221	339
AML3600CFP	primary	GEA	Spectra main lug module AML3600CFP (600 A compression)	EDH-GEA-00229	339
AML3600FP	primary	GEA	Spectra main lug module AML3600FP (600 A mechanical)	EDH-GEA-00224	339
AML3600SFP	primary	GEA	Spectra main lug module AML3600SFP (600 A mechanical)	EDH-GEA-00223	340
AML3800CFP	primary	GEA	Spectra main lug module AML3800CFP (800 A compression)	EDH-GEA-00230	340
AML3800FP	primary	GEA	Spectra main lug module AML3800FP (800 A mechanical)	EDH-GEA-00225	340
ANK120D	primary	GEA	Spectra neutral kit ANK120D	EDH-GEA-00235	380
ANK800D	primary	GEA	Spectra neutral kit ANK800D	EDH-GEA-00234	380
ANKN120	primary	GEA	Spectra neutral kit ANKN120	EDH-GEA-00233	381
ANKN400	primary	GEA	Spectra neutral kit ANKN400	EDH-GEA-00232	381
APHBL	primary	GEA	A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	EDH-GEA-00084	310
APHBQ	primary	GEA	A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	EDH-GEA-00083	311
APN48	primary	GEA	A-Series Permanent circuit number kit, Nos 1-48	EDH-GEA-00093	311
APN84	primary	GEA	A-Series Permanent circuit number kit, Nos 43-84	EDH-GEA-00094	312
APP1	primary	GEA	Spectra blank filler plate 1X (36, 40 in box)	EDH-GEA-00202	388

Number	Type	Mfr	Description	Catalogue ID	Pg
APP1S	primary	GEA	Spectra blank filler plate 1X (27, 31 in box)	EDH-GEA-00201	388
APP1W	primary	GEA	Spectra blank filler plate 1X (44 in box)	EDH-GEA-00203	389
APP2	primary	GEA	Spectra blank filler plate 2X (36, 40 in box)	EDH-GEA-00205	389
APP2S	primary	GEA	Spectra blank filler plate 2X (27, 31 in box)	EDH-GEA-00204	389
APP2W	primary	GEA	Spectra blank filler plate 2X (44 in box)	EDH-GEA-00206	389
APP3	primary	GEA	Spectra blank filler plate 3X (36, 40 in box)	EDH-GEA-00208	389
APP3S	primary	GEA	Spectra blank filler plate 3X (27, 31 in box)	EDH-GEA-00207	390
APP3W	primary	GEA	Spectra blank filler plate 3X (44 in box)	EDH-GEA-00209	390
APP4	primary	GEA	Spectra blank filler plate 4X (36, 40 in box)	EDH-GEA-00211	390
APP4S	primary	GEA	Spectra blank filler plate 4X (27, 31 in box)	EDH-GEA-00210	390
APP4W	primary	GEA	Spectra blank filler plate 4X (44 in box)	EDH-GEA-00212	390
APP5	primary	GEA	Spectra blank filler plate 5X (36, 40 in box)	EDH-GEA-00214	391
APP5S	primary	GEA	Spectra blank filler plate 5X (27, 31 in box)	EDH-GEA-00213	391
APP5W	primary	GEA	Spectra blank filler plate 5X (44 in box)	EDH-GEA-00215	391
APP6	primary	GEA	Spectra blank filler plate 6X (36, 40 in box)	EDH-GEA-00217	391
APP6S	primary	GEA	Spectra blank filler plate 6X (27, 31 in box)	EDH-GEA-00216	391
APP6W	primary	GEA	Spectra blank filler plate 6X (44 in box)	EDH-GEA-00218	392
ASP25AD65KA	primary	GEA	A-Series AD 25 to 65 kAIC barrier kit	EDH-GEA-00087	309
ASP2PTFJ3P	primary	GEA	A-Series 2P to 3P SF conversion kit for horizontal subfeed	EDH-GEA-00086	311
ASP2PTQD3P	primary	GEA	A-Series 2P to 3P TQD conversion kit	EDH-GEA-00085	311
ASPAQLEBKT	primary	GEA	A-Series AQ/AL/AE rail bracket	EDH-GEA-00089	309
ASPFB12P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	EDH-GEA-00038	306
ASPFB3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	EDH-GEA-00039	306
ASPP6EY12D	primary	GEA	A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole	EDH-GEA-00009	313
ASPP6EY6D	primary	GEA	A-Series II power panel TEY three-phase circuit breaker kit, six-pole	EDH-GEA-00008	313
ASPP6FB6D	primary	GEA	A-Series II power panel FB three-phase circuit breaker kit, six-pole	EDH-GEA-00005	314
ASPP6QB12D	primary	GEA	A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole	EDH-GEA-00007	314
ASPP6QB6D	primary	GEA	A-Series II power panel THQB three-phase circuit breaker kit, six-pole	EDH-GEA-00006	315
ASPP6QD6D	primary	GEA	A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-br	EDH-GEA-00001	315
ASPP6SE6D	primary	GEA	A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole	EDH-GEA-00002	316
ASPP6SF3S	primary	GEA	A-Series II power panel SF three-phase circuit breaker kit, three-pole single	EDH-GEA-00003	316
ASPP6SG3S	primary	GEA	A-Series II power panel SG three-phase circuit breaker kit, three-pole	EDH-GEA-00004	317
ASPTED3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE	EDH-GEA-00036	306
ASPTQD3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type TQD/THQD	EDH-GEA-00037	306
BBKB32	primary	SIE	P2/P3 BL/BQD 100A max twin-mount branch strap kit	EDH-SIE-00102	450
BBKEB32	primary	SIE	P3 NEB/HEB 6-pole 3in branch breaker kit	EDH-SIE-00107	462
BBKED32	primary	SIE	P2/P3 ED twin-mount branch strap kit	EDH-SIE-00104	451
BBKGB32	primary	SIE	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	EDH-SIE-00106	451
BBKNB32	primary	SIE	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	EDH-SIE-00105	452
BBKQ1	primary	SIE	P2 QJ single-mount branch strap kit	EDH-SIE-00110	452
BBKQ2	primary	SIE	P3 branch breaker kit for 2- and 3-pole QJ twin mount	EDH-SIE-00111	462
BBKQR1	primary	SIE	P2 QR 225A max single-mount branch strap kit	EDH-SIE-00108	452
BBKQR2	primary	SIE	P3 twin breaker mounting kit for QR	EDH-SIE-00109	463

Number	Type	Mfr	Description	Catalogue ID	Pg
BBKQRP1FK	primary	SIE	P2 filler kit for QR	EDH-SIE-00080	461
BBKQRP2FK	primary	SIE	P3 filler kit for QR	EDH-SIE-00081	466
BBKVA4P2P3	primary	SIE	P2/P3 3VA41/xGB 125A max twin-mount strap kit	EDH-SIE-00103	453
BBKVA5262P2HW	primary	SIE	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/	EDH-SIE-00113	460
BBKVA5262P2S	primary	SIE	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	EDH-SIE-00112	453
BBKVA5262S	alias	SIE	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	EDH-SIE-00112	453
BBKVA52P3HW	primary	SIE	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting	EDH-SIE-00115	465
BBKVA52P3T	primary	SIE	P3 strap kit	EDH-SIE-00114	463
BHT	primary	EAT	Type BR loadcenter handle tie bar joining two adjacent single-pole type br break	EDH-EAT-00125	18
BINA	primary	EAT	Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)	EDH-EAT-00123	17
BK1A	primary	SIE	Revised P1 bonding kit including service disconnect label	EDH-SIE-00096	530
BNDKT	primary	GEA	A-Series Service entrance kit 225 A	EDH-GEA-00081	310
BNDKT6	primary	GEA	A-Series Service entrance kit 400/600 A	EDH-GEA-00082	310
BNK2	primary	SIE	Neutral lug kit	EDH-SIE-00116	454
BNK350N	primary	SIE	Neutral lug kit	EDH-SIE-00117	449
BNKP2EX1	primary	SIE	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/G	EDH-SIE-00119	454
Bottom H01 (no L/O), H02 (2 L/O), H03 (1 L/O RT), H04 (1 L/O LT); top H05, H07 (1 L/O RT), H08 (1 L/O LT)	style_number	EAT	PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X	EDH-EAT-00385	161
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	EAT	PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)	EDH-EAT-00380	160
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	EAT	PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)	EDH-EAT-00381	159
BQFS1K	equivalent	SIE	Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)	EDH-SIE-00252	554
BQFS2	primary	SIE	Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)	EDH-SIE-00252	554
BRFP	primary	EAT	Type BR loadcenter filler plate (BRFP)	EDH-EAT-00121	18
BRL200	primary	EAT	Type BR loadcenter main lugs (BRL200)	EDH-EAT-00120	16
BRLW	primary	EAT	Type BR loadcenter padlockable handle lockoff for 1- (BRLW)	EDH-EAT-00126	18
BRLW1	primary	EAT	Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mo	EDH-EAT-00127	19
BRS225	primary	EAT	Type BR loadcenter main and subfeed lug block (BRS225)	EDH-EAT-00117	16
BRSF125	primary	EAT	Type BR loadcenter main and subfeed lug block (BRSF125)	EDH-EAT-00115	17
BRSF150	primary	EAT	Type BR loadcenter main and subfeed lug block (BRSF150)	EDH-EAT-00116	17
BWFP	primary	EAT	Type BR loadcenter filler plate for bw main circuit breaker space (with hardware	EDH-EAT-00122	18
BX2457 G02; BX2473 G03; BX2490 G04; BX3673/BX4473 G05; BX3690/BX4490 G06	style_number	EAT	PRL4 vented cover assembly (side rails + top/bottom vented covers)	EDH-EAT-00415	207
CCBFP1	primary	GEA	CCB panelboard filler plate 1X	EDH-GEA-00267	329
CCBFP3	primary	GEA	CCB panelboard filler plate 3X	EDH-GEA-00268	329
CCBFP5	primary	GEA	CCB panelboard filler plate 5X	EDH-GEA-00269	330
CCE125	primary	SIE	Siemens CCE125 compression lug, ED 15-125A	EDH-SIE-00263	554
CCF250	primary	SIE	Siemens CCF250 compression lug, FD	EDH-SIE-00267	559
CCL600	primary	SIE	Siemens CCL600 compression lug, JD/LD	EDH-SIE-00274	561

Number	Type	Mfr	Description	Catalogue ID	Pg
CCM800K2	primary	SIE	Siemens CCM800K2 compression lug kit, MD 2-pole	EDH-SIE-00290	569
CCM800K3	primary	SIE	Siemens CCM800K3 compression lug kit, MD 3-pole	EDH-SIE-00291	569
CCN1200K2	primary	SIE	Siemens CCN1200K2 compression lug kit, ND 2-pole	EDH-SIE-00292	569
CCN1200K3	primary	SIE	Siemens CCN1200K3 compression lug kit, ND 3-pole	EDH-SIE-00293	569
CCQ250	primary	SIE	Siemens CCQ250 compression lug, QR2	EDH-SIE-00255	577
CF16RJ63C36	primary	SQD	OEM QED-2 I-Line switchboard interior CF16RJ63C36	EDH-SQD-00176	290
CF20R63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF20R63C	EDH-SQD-00172	291
CF20RJ63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF20RJ63C	EDH-SQD-00174	291
CF25R63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF25R63C	EDH-SQD-00173	291
CF30RJ63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF30RJ63C	EDH-SQD-00175	291
Chassis height 14X G01; 23X G02; 31X G03; 40X G04; 53X G05	style_number	EAT	PRL3a/3X deadfront assembly frame (rails and end covers)	EDH-EAT-00374	166
CLRSJL3	primary	SIE	Siemens CLRSJL3 rear-stud shield kit, CJD/SCJD/CLD/SCLD	EDH-SIE-00313	563
CNLK30A	supersedes	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	517
CNLK42A	supersedes	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	517
CNLK42B	primary	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	517
CNLK54A	supersedes	SIE	RP1 CU neutral lug kit 54B	EDH-SIE-00039	517
CNLK54B	primary	SIE	RP1 CU neutral lug kit 54B	EDH-SIE-00039	517
Controller 5X H01; Expansion 7X H02, 16X H03	style_number	EAT	PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover	EDH-EAT-00399	163
CU150HD	primary	SQD	Optional copper mechanical lug kit CU150HD (HD/HG 15-150 A)	EDH-SQD-00086	237
CU250JD	primary	SQD	Optional copper mechanical lug kit CU250JD (JD/JG 150-250 A)	EDH-SQD-00087	237
CU400LA	primary	SQD	Optional copper mechanical lug kit CU400LA (LA 125-400 A)	EDH-SQD-00088	238
DFFP01A	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	525
DFFP01B	primary	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	525
DFFP01C	primary	SIE	Revised P1 400A main blank filler plate	EDH-SIE-00065	525
DFFP1	supersedes	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	526
DFFP1A	primary	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	526
DFFP1A	superseded_by	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	547
DFFP3	primary	SIE	Deadfront filler kit	EDH-SIE-00076	458
DFFP6	primary	SIE	Deadfront filler kit	EDH-SIE-00077	458
DFFPED01	supersedes	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	528
DFFPED01	primary	SIE	P1 main filler for 100-125A frames ED	EDH-SIE-00069	449
DFFPFD01	primary	SIE	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels	EDH-SIE-00070	526
DFFPJD01	primary	SIE	JD main filler plate (plastic)	EDH-SIE-00071	527
DFFPJD02	primary	SIE	JD main filler plate for Revised P1 400A with large MB opening only	EDH-SIE-00072	527
DFFPQJ01	primary	SIE	QJ main filler plate	EDH-SIE-00073	527
DFFPQJ02	primary	SIE	QJ main filler plate	EDH-SIE-00074	528
DFFPVA41A	primary	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	528
DFFPVA41A	superseded_by	SIE	P1 main filler for 100-125A frames ED	EDH-SIE-00069	449
DFFPVA5262A	primary	SIE	RP1 main or subfeed filler	EDH-SIE-00067	528
DFFPVA5262P2A	primary	SIE	3VA52/61/62 filler for single mount P2/P3 applications	EDH-SIE-00078	459
DFFPVA5262P2B	primary	SIE	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or	EDH-SIE-00079	459
DFFPVA5363A	primary	SIE	RP1 400A main filler for 3VA53/63	EDH-SIE-00068	529
DFK07	primary	SIE	P2/P3 deadfront center strip	EDH-SIE-00086	457
DFK08	primary	SIE	P2/P3 deadfront center strip	EDH-SIE-00087	457
DFK1	primary	SIE	P2/P3 deadfront center strip kit	EDH-SIE-00085	458

Number	Type	Mfr	Description	Catalogue ID	Pg
DFP3AP01	primary	SIE	P3 adapter plate	EDH-SIE-00084	459
EBF1	primary	SIE	NEB/HEB filler plate (EB deadfront filler)	EDH-SIE-00083	464
ECGK	primary	SIE	Copper equipment ground bus kit	EDH-SIE-00099	520
EGK	primary	SIE	Al/Cu equipment ground bus kit	EDH-SIE-00098	520
EGS12	primary	GEA	A-Series Equipment ground, standard isolated/insulated, per 12 branch positions	EDH-GEA-00097	308
Enclosure height 24 in G01; 36 in G02; 42 in G07; 48 in G03; 60 in G04; 72 in G05; 90 in G06	style_number	EAT	PRL1a/2a/1X/2X deadfront cover assembly	EDH-EAT-00361	124
EWK1	primary	SIE	End wall kit with knockouts (20in W x 5.75in D) 20in	EDH-SIE-00240	529
EWK1B	primary	SIE	End wall kit without knockouts (20in W x 5.75in D) 20in	EDH-SIE-00243	530
EWK2	primary	SIE	End wall kit with knockouts (24in W x 7.75in D) 24in	EDH-SIE-00241	464
EWK2B	primary	SIE	End wall kit without knockouts (24in W x 7.75in D) 24in	EDH-SIE-00244	465
EWK3	primary	SIE	End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in	EDH-SIE-00242	530
FCAL12	primary	GEA	GE FCAL12 single lug, Record Plus FB/FC 100, 15-20 A	EDH-GEA-00369	421
FCAL13	primary	GEA	GE FCAL13 single lug, Record Plus FB/FC 100, 25-60 A	EDH-GEA-00371	421
FCAL14	primary	GEA	GE FCAL14 single lug, Record Plus FB/FC 100, 70-100 A	EDH-GEA-00373	421
FCAL15	primary	GEA	GE FCAL15 single lug, Record Plus FE 250 (150 A)	EDH-GEA-00375	423
FCAL16	primary	GEA	GE FCAL16 single lug, Record Plus FE 250 (250 A)	EDH-GEA-00378	423
FCALK12	primary	GEA	GE FCALK12 lug kit (set of 3), Record Plus FB/FC 100, 15-20 A	EDH-GEA-00370	420
FCALK13	primary	GEA	GE FCALK13 lug kit (set of 3), Record Plus FB/FC 100, 25-60 A	EDH-GEA-00372	420
FCALK14	primary	GEA	GE FCALK14 lug kit (set of 3), Record Plus FB/FC 100, 70-100 A	EDH-GEA-00374	420
FCALK15	primary	GEA	GE FCALK15 lug kit (3 lugs + lug cover), Record Plus FE (150 A)	EDH-GEA-00376	422
FCALK15LV	primary	GEA	GE FCALK15LV lug kit with control wire terminal, Record Plus FE (150 A)	EDH-GEA-00377	422
FCALK16	primary	GEA	GE FCALK16 lug kit (3 lugs + lug cover), Record Plus FE (250 A)	EDH-GEA-00379	422
FCALK16LV	primary	GEA	GE FCALK16LV lug kit with control wire terminal, Record Plus FE (250 A)	EDH-GEA-00380	423
FCALK218H	primary	GEA	GE FCALK218H 2-pole lug kit, Record Plus FG 600	EDH-GEA-00381	424
FCALK318H	primary	GEA	GE FCALK318H 3-pole lug kit, Record Plus FG 600	EDH-GEA-00382	424
FGH1LCK	primary	GEA	GE FGH1LCK lug cover kit, Record Plus FG	EDH-GEA-00383	425
FGJN3	primary	GEA	GE FGJN3 nut plate / terminal shoe, Record Plus FG	EDH-GEA-00385	425
FGJS3	primary	GEA	GE FGJS3 terminal shield fin cover, Record Plus FG	EDH-GEA-00384	424
G01 24 in Al/Cu; G02 24 in Cu; G03 36-90 in Al/Cu; G04 36-90 in Cu	style_number	EAT	Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)	EDH-EAT-00358	121
G01 24 in encl Al/Cu; G03 24 in Cu; G02 36-90 in encl Al/Cu; G04 36-90 in Cu (vintage PRL: G02 boxes >=30 in, G01 boxes <30 in)	style_number	EAT	Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)	EDH-EAT-00357	122
GTIN 785901798019	alias	SQD	QMB blank filler plate QMB15BLW (15 in.)	EDH-SQD-00092	244
H01	style_number	EAT	PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only	EDH-EAT-00383	159
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizont	EDH-EAT-00392	165
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00393	165
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00394	166

Number	Type	Mfr	Description	Catalogue ID	Pg
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3	EDH-EAT-00395	160
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3	EDH-EAT-00396	161
H01 = 1.00 in (25.4 mm) ... H16 = 16.00 in (406.4 mm), 1 in increments	style_number	EAT	PRL1a/2a/1X/2X deadfront blank covers 1-16 in	EDH-EAT-00369	127
H01 12 ckt 10 in; H02 18/13 in; H03 24/16 in; H04 30/19 in; H05 36/22 in; H06 42/25 in; H07 48/28 in; H08 54/31 in; H09 60/34 in	style_number	EAT	Vintage PRL1 branch section deadfront cover	EDH-EAT-00409	56
H01 = 1X ... H12 = 12X	style_number	EAT	PRL3a/3X neutral / blank cover 1X-12X	EDH-EAT-00389	166
H01 bottom/H02 with lock-offs; H03 top/H04 with lock-offs	style_number	EAT	PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)	EDH-EAT-00379	159
H01 FCL; H02 FB-P	style_number	EAT	PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cove	EDH-EAT-00382	161
H01/H02 top; H03/H04 bottom (without/with lock-offs)	style_number	EAT	PRL3a/3X deadfront device cover: LCL vertical cover 21X	EDH-EAT-00384	159
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	EAT	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (P	EDH-EAT-00387	160
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	EAT	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2	EDH-EAT-00388	163
H01-H09 (12-60 circuits, 10-34 in high; same heights as 5156C10)	style_number	EAT	Vintage PRL2 branch section deadfront cover	EDH-EAT-00410	55
H01 (top and bottom)	style_number	EAT	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-202	EDH-EAT-00365	125
H01 (top and bottom)	style_number	EAT	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-202	EDH-EAT-00366	125
H01 top, H02 bottom	style_number	EAT	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device co	EDH-EAT-00362	126
H01 top, H02 bottom	style_number	EAT	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	EDH-EAT-00364	126
H01 top, H02 bottom	style_number	EAT	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	EDH-EAT-00367	125
H01 top, H02 bottom	style_number	EAT	PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover	EDH-EAT-00368	125
H01 top, H02 bottom	style_number	EAT	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL	EDH-EAT-00376	164
H01 top, H02 bottom	style_number	EAT	PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock	EDH-EAT-00378	178
H01 top, H02 bottom (same with/without lock-offs)	style_number	EAT	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH,	EDH-EAT-00375	164
H01 top, H04 bottom	style_number	EAT	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device co	EDH-EAT-00363	126
H01 top (thermal-magnetic), H02 bottom (PXR)	style_number	EAT	PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)	EDH-EAT-00377	178
HLN1BL	primary	SQD	I-Line blank extension HLN1BL	EDH-SQD-00139	230
HLN4BL	primary	SQD	I-Line blank extension HLN4BL	EDH-SQD-00140	230
HLN4EBL	primary	SQD	I-Line blank extension HLN4EBL	EDH-SQD-00141	231
HLW1BL	primary	SQD	I-Line blank extension HLW1BL	EDH-SQD-00142	231
HLW4BL	primary	SQD	I-Line blank extension HLW4BL	EDH-SQD-00143	232
HLW4EBL	primary	SQD	I-Line blank extension HLW4EBL	EDH-SQD-00144	232
HNM1BL	primary	SQD	I-Line blank filler HNM1BL	EDH-SQD-00137	233

Number	Type	Mfr	Description	Catalogue ID	Pg
HNM4BL	primary	SQD	I-Line blank filler HNM4BL	EDH-SQD-00138	233
HQO306	primary	SQD	Plug-on QO distribution panel HQO306 for I-Line	EDH-SQD-00155	235
HRK1020	primary	SQD	QMB Class R fuse kit HRK1020	EDH-SQD-00056	250
HRK30	primary	SQD	QMB Class R fuse kit HRK30	EDH-SQD-00052	250
ICGK	primary	SIE	Insulated copper ground bus kit	EDH-SIE-00101	521
IGK	primary	SIE	Insulated Al/Cu ground bus kit	EDH-SIE-00100	521
IMK1	primary	SIE	Interior mounting kit with adjustment provisions for P1/P2/P3	EDH-SIE-00095	530
JDTERMSHIELD	primary	SIE	Siemens JDTERMSHIELD terminal shield, JD/LD 3-pole	EDH-SIE-00276	563
K80133	primary	EAT	Trim lock for right-handed door	EDH-EAT-00448	128
K80429	primary	EAT	T-handle lock	EDH-EAT-00449	128
K80522	primary	EAT	Panelboard trim lock — Trim lock for left-handed door (hinged on left side)	EDH-EAT-00067	30
KB11A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00165	132
KB11A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00164	132
KB11AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00133	60
KB11AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00132	60
KB11S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00167	133
KB11S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00166	133
KB11SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00135	61
KB11SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00134	61
KB13A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, b	EDH-EAT-00161	133
KB13A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, t	EDH-EAT-00160	134
KB13AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00129	62
KB13AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00128	62
KB13S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, b	EDH-EAT-00163	134
KB13S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, t	EDH-EAT-00162	134
KB13SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00131	63
KB13SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00130	63
KB21A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00173	135
KB21A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00172	135
KB21AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00141	64
KB21AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00140	64
KB21S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00175	135
KB21S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00174	136
KB21SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00143	65

Number	Type	Mfr	Description	Catalogue ID	Pg
KB21SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00142	65
KB23A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, b	EDH-EAT-00169	136
KB23A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, t	EDH-EAT-00168	136
KB23AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00137	66
KB23AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00136	66
KB23S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, b	EDH-EAT-00171	137
KB23S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, t	EDH-EAT-00170	137
KB23SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00139	67
KB23SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00138	67
KB41A14B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00181	137
KB41A14T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00180	138
KB41AJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, t	EDH-EAT-00149	68
KB41AJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, tin-	EDH-EAT-00148	68
KB41AKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, t	EDH-EAT-00157	69
KB41AKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, tin-	EDH-EAT-00156	69
KB41S14B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00183	138
KB41S14T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00182	139
KB41SJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, s	EDH-EAT-00151	70
KB41SJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, silv	EDH-EAT-00150	70
KB41SKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, s	EDH-EAT-00159	71
KB41SKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, silv	EDH-EAT-00158	71
KB43A34B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00177	139
KB43A34T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00176	140
KB43AJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, ti	EDH-EAT-00145	72
KB43AJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, tin-p	EDH-EAT-00144	72
KB43AKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, ti	EDH-EAT-00153	73
KB43AKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, tin-p	EDH-EAT-00152	73
KB43S34B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00179	140
KB43S34T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00178	141
KB43SJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, si	EDH-EAT-00147	74

Number	Type	Mfr	Description	Catalogue ID	Pg
KB43SJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, silve	EDH-EAT-00146	74
KB43SKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, si	EDH-EAT-00155	75
KB43SKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, silve	EDH-EAT-00154	75
KB61S16B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00187	141
KB61S16T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00186	142
KB63S36B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00185	142
KB63S36T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00184	143
KCDPCA	primary	EAT	CDP breaker connector kit, twin-mount, for CA, CAH, HCA	EDH-EAT-00004	20
KCDPDK	primary	EAT	CDP breaker retrofit kit (Series C DK + connector kit) replacing Westinghouse DA	EDH-EAT-00024	32
KCDPED225	primary	EAT	CDP breaker connector kit, twin-mount, for FD, FDB, HFD, FDC, ED, EDH, EDC	EDH-EAT-00002	21
KCDPEHD	primary	EAT	CDP breaker retrofit kit (Series C EHD + connector kit) replacing Westinghouse E	EDH-EAT-00016	33
KCDPFB100	primary	EAT	CDP breaker connector kit, twin-mount, for EHD, FDB, FD, HFD, FDC (100 A maximum	EDH-EAT-00001	21
KCDPFB100-H	primary	EAT	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of	EDH-EAT-00013	31
KCDPFBP	primary	EAT	CDP breaker connector kit, twin-mount, for FB-P, FCL	EDH-EAT-00003	22
KCDPFD	primary	EAT	CDP breaker retrofit kit (Series C FD + connector kit) replacing Westinghouse HF	EDH-EAT-00018	34
KCDPFD100H	alias	EAT	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of	EDH-EAT-00013	31
KCDPFDB	primary	EAT	CDP breaker retrofit kit (Series C FDB + connector kit) replacing Westinghouse F	EDH-EAT-00017	35
KCDPHKD	primary	EAT	CDP breaker retrofit kit (Series C HKD + connector kit) replacing Westinghouse H	EDH-EAT-00020	36
KCDPJD	primary	EAT	CDP breaker retrofit kit (Series C JD + connector kit) replacing Westinghouse KB	EDH-EAT-00021	37
KCDPJDB	primary	EAT	CDP breaker retrofit kit (Series C JDB + connector kit) replacing Westinghouse J	EDH-EAT-00023	38
KCDPKB	primary	EAT	CDP breaker connector kit, twin-mount, for JD, JDB, HJD, JDC	EDH-EAT-00005	23
KCDPKD	primary	EAT	CDP breaker retrofit kit (Series C KD + connector kit) replacing Westinghouse KA	EDH-EAT-00019	39
KCDPKDB	primary	EAT	CDP breaker retrofit kit (Series C KDB + connector kit) replacing Westinghouse J	EDH-EAT-00022	40
KCDPLA400	primary	EAT	CDP breaker connector kit, twin-mount, for LA-P	EDH-EAT-00007	23
KCDPLA600	primary	EAT	CDP breaker connector kit, twin-mount, for LD, HLD, LDC	EDH-EAT-00008	24
KCDPLB	primary	EAT	CDP breaker connector kit, twin-mount, for DK, KD, KDB, HKD, KDC	EDH-EAT-00006	25
KCDPLCL	primary	EAT	CDP breaker connector kit, single-mount, for LCL	EDH-EAT-00009	25
KCDPLD	primary	EAT	CDP breaker retrofit kit (Series C LD + connector kit) replacing Westinghouse LA	EDH-EAT-00025	41
KCDPMC	primary	EAT	CDP breaker connector kit, single-mount, for MDL, HMDL	EDH-EAT-00010	26
KCDPMDL	primary	EAT	CDP breaker retrofit kit (Series C MDL + connector kit) replacing Westinghouse M	EDH-EAT-00026	42
KCDPNBP	primary	EAT	CDP breaker connector kit, single-mount, for NB-P	EDH-EAT-00012	27
KCDPNC	primary	EAT	CDP breaker connector kit, single-mount, for ND, HND	EDH-EAT-00011	27
KCDPND	primary	EAT	CDP breaker retrofit kit (Series C ND + connector kit) replacing Westinghouse NB	EDH-EAT-00027	43
KCDP_X	primary	EAT	CDP filler cover, any 1X increment (catalog pattern KCDPnX)	EDH-EAT-00014	28
KFDP4XT	primary	EAT	FDP fusible switch connector kit 4X (30, 60)	EDH-EAT-00028	221

Number	Type	Mfr	Description	Catalogue ID	Pg
KFDP5XT	primary	EAT	FDP fusible switch connector kit 5X (100 A)	EDH-EAT-00029	221
KFDPB6X-2	primary	EAT	FDP fusible switch connector kit 6X (200 A)	EDH-EAT-00030	222
KFDPBS324R	primary	EAT	FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)	EDH-EAT-00042	45
KFDPBS364R	primary	EAT	FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)	EDH-EAT-00043	46
KFDPW11X-6	primary	EAT	FDP fusible switch connector kit 11X (600 A)	EDH-EAT-00032	222
KFDPW11X-8	primary	EAT	FDP fusible switch connector kit 11X (800 A)	EDH-EAT-00033	223
KFDPW15X-12	primary	EAT	FDP fusible switch connector kit 15X (1200 A)	EDH-EAT-00034	223
KFDPW325R	primary	EAT	FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)	EDH-EAT-00044	46
KFDPW326R	primary	EAT	FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)	EDH-EAT-00046	46
KFDPW365R	primary	EAT	FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)	EDH-EAT-00045	47
KFDPW366R	primary	EAT	FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)	EDH-EAT-00047	47
KFDPW367	primary	EAT	FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)	EDH-EAT-00048	47
KFDPW368	primary	EAT	FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)	EDH-EAT-00049	48
KFDPW9X-4	primary	EAT	FDP fusible switch connector kit 9X (400 A)	EDH-EAT-00031	224
KFDPWT3211R	primary	EAT	FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)	EDH-EAT-00036	48
KFDPWT3222R	primary	EAT	FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)	EDH-EAT-00038	48
KFDPWT3233R	primary	EAT	FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)	EDH-EAT-00040	49
KFDPWT3611R	primary	EAT	FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)	EDH-EAT-00037	49
KFDPWT3622R	primary	EAT	FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)	EDH-EAT-00039	49
KFDPWT3633R	primary	EAT	FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)	EDH-EAT-00041	50
KFDP_X	primary	EAT	FDP filler cover, any 1X increment (catalog pattern KFDPnX)	EDH-EAT-00035	44
KL11AMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00194	108
KL11AMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00198	80
KL11AMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00190	80
KL11AVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00206	108
KL11AVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00210	80
KL11AVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00202	81
KL11SCF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00215	109
KL11SCO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00217	81
KL11SCS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00213	81
KL11SMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00195	109
KL11SMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00199	82
KL11SMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00191	82

Number	Type	Mfr	Description	Catalogue ID	Pg
KL11SVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00207	109
KL11SVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00211	82
KL11SVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00203	83
KL13AMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00192	110
KL13AMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00196	83
KL13AMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00188	83
KL13AVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00204	110
KL13AVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00208	84
KL13AVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00200	84
KL13SCF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00214	110
KL13SCO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00216	84
KL13SCS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00212	85
KL13SMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00193	111
KL13SMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00197	85
KL13SMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00189	85
KL13SVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00205	111
KL13SVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00209	86
KL13SVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00201	86
KL21AMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00224	111
KL21AMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00228	86
KL21AMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00220	87
KL21AVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00236	112
KL21AVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00240	87
KL21AVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00232	87
KL21SCF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00245	112
KL21SCO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00247	88
KL21SCS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00243	88
KL21SMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00225	112
KL21SMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00229	88
KL21SMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00221	89

Number	Type	Mfr	Description	Catalogue ID	Pg
KL21SVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00237	113
KL21SVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00241	89
KL21SVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00233	89
KL23AMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00222	113
KL23AMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00226	90
KL23AMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00218	90
KL23AVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00234	113
KL23AVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00238	90
KL23AVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00230	91
KL23SCF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00244	114
KL23SCO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00246	91
KL23SCS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00242	91
KL23SMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00223	114
KL23SMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00227	92
KL23SMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00219	92
KL23SVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00235	114
KL23SVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00239	92
KL23SVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00231	93
KL41AMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00254	93
KL41AMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00250	93
KL41AVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00262	94
KL41AVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00258	94
KL41SCO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00265	94
KL41SMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00255	95
KL41SMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00251	95
KL41SVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00263	95
KL41SVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00259	96
KL43AMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00252	96
KL43AMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00248	96
KL43AVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00260	97

Number	Type	Mfr	Description	Catalogue ID	Pg
KL43AVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00256	97
KL43SCO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00264	97
KL43SMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00253	98
KL43SMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00249	98
KL43SVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00261	98
KL43SVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00257	99
KL61CMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, bare	EDH-EAT-00275	99
KL61CMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, bare	EDH-EAT-00269	99
KL61CVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, bare copper	EDH-EAT-00287	100
KL61CVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, bare copper	EDH-EAT-00281	100
KL61SMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00276	100
KL61SMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00270	101
KL61SVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00288	101
KL61SVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00282	101
KL61TMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00277	102
KL61TMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00271	102
KL61TVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00289	102
KL61TVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00283	103
KL63CMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, bare	EDH-EAT-00272	103
KL63CMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, bare	EDH-EAT-00266	103
KL63CVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, bare copper	EDH-EAT-00284	104
KL63CVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, bare copper	EDH-EAT-00278	104
KL63SMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00273	104
KL63SMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00267	105
KL63SVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00285	105
KL63SVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00279	105
KL63TMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00274	106
KL63TMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00268	106
KL63TVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, tin-plated c	EDH-EAT-00286	106
KL63TVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, tin-plated c	EDH-EAT-00280	107

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL1BAB	primary	EAT	PRL1 replacement branch connector kit (BAB/QBHW), up to 12 poles	EDH-EAT-00050	52
KPRL2GHB	primary	EAT	PRL2 replacement branch connector kit (GB/GHB), up to 12 poles	EDH-EAT-00051	53
KPRL3ABA06	primary	EAT	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00309	148
KPRL3ABA06-1	primary	EAT	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00310	149
KPRL3ABA12	primary	EAT	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00311	149
KPRL3ABA12-1	primary	EAT	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00312	150
KPRL3ABA18	primary	EAT	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00313	150
KPRL3ABA18-1	primary	EAT	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00314	151
KPRL3ABA24	primary	EAT	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00315	151
KPRL3ABA24-1	primary	EAT	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00316	152
KPRL3AED2	primary	EAT	PRL3a horizontal F-frame breaker connector kit (FD...)	EDH-EAT-00334	152
KPRL3AED3	primary	EAT	PRL3a horizontal F-frame breaker connector kit (FD...)	EDH-EAT-00333	152
KPRL3AFD1	primary	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00332	153
KPRL3AFD2	primary	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00331	153
KPRL3AFD3	primary	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00330	153
KPRL3AGB06	primary	EAT	PRL3a horizontal 6-circuit GHB connector kit, 3-phase	EDH-EAT-00317	154
KPRL3AGB06-1	primary	EAT	PRL3a horizontal 6-circuit GHB connector kit, 1-phase	EDH-EAT-00318	154
KPRL3AGB12	primary	EAT	PRL3a horizontal 12-circuit GHB connector kit, 3-phase	EDH-EAT-00319	155
KPRL3AGB12-1	primary	EAT	PRL3a horizontal 12-circuit GHB connector kit, 1-phase	EDH-EAT-00320	155
KPRL3AGB18	primary	EAT	PRL3a horizontal 18-circuit GHB connector kit, 3-phase	EDH-EAT-00321	156
KPRL3AGB18-1	primary	EAT	PRL3a horizontal 18-circuit GHB connector kit, 1-phase	EDH-EAT-00322	156
KPRL3AGB24	primary	EAT	PRL3a horizontal 24-circuit GHB connector kit, 3-phase	EDH-EAT-00323	157
KPRL3AGB24-1	primary	EAT	PRL3a horizontal 24-circuit GHB connector kit, 1-phase	EDH-EAT-00324	157
KPRL3CA	primary	EAT	PRL3 replacement connector kit for CA, CAH, HCA	EDH-EAT-00054	145
KPRL3ED	primary	EAT	PRL3 replacement connector kit for ED, EDH, EDC (240 V max)	EDH-EAT-00053	146
KPRL3FD	primary	EAT	PRL3 replacement connector kit for EHD, FDB, FD, HFD, FDC (240/480/600 V)	EDH-EAT-00052	146
KPRL3X21T	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 1-pole twin mount...)	EDH-EAT-00329	170
KPRL3X22	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)	EDH-EAT-00326	170
KPRL3X22T	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)	EDH-EAT-00328	170
KPRL3X23	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)	EDH-EAT-00325	171
KPRL3X23T	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)	EDH-EAT-00327	171
KPRL3XBA06	primary	EAT	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00293	171
KPRL3XBA06-1	primary	EAT	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00294	172
KPRL3XBA12	primary	EAT	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00295	172
KPRL3XBA12-1	primary	EAT	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00296	172
KPRL3XBA18	primary	EAT	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00297	173
KPRL3XBA18-1	primary	EAT	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00298	173

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL3XBA24	primary	EAT	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00299	173
KPRL3XBA24-1	primary	EAT	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00300	174
KPRL3XGB06	primary	EAT	PRL3X horizontal 6-circuit GHB connector kit, 3-phase	EDH-EAT-00301	174
KPRL3XGB06-1	primary	EAT	PRL3X horizontal 6-circuit GHB connector kit, 1-phase	EDH-EAT-00302	174
KPRL3XGB12	primary	EAT	PRL3X horizontal 12-circuit GHB connector kit, 3-phase	EDH-EAT-00303	175
KPRL3XGB12-1	primary	EAT	PRL3X horizontal 12-circuit GHB connector kit, 1-phase	EDH-EAT-00304	175
KPRL3XGB18	primary	EAT	PRL3X horizontal 18-circuit GHB connector kit, 3-phase	EDH-EAT-00305	175
KPRL3XGB18-1	primary	EAT	PRL3X horizontal 18-circuit GHB connector kit, 1-phase	EDH-EAT-00306	176
KPRL3XGB24	primary	EAT	PRL3X horizontal 24-circuit GHB connector kit, 3-phase	EDH-EAT-00307	176
KPRL3XGB24-1	primary	EAT	PRL3X horizontal 24-circuit GHB connector kit, 1-phase	EDH-EAT-00308	176
KPRL44X	primary	EAT	PRL4F fusible switch connector kit 4X (60 A)	EDH-EAT-00108	181
KPRL45X	supersedes	EAT	PRL4F fusible switch connector kit 5X (100 A)	EDH-EAT-00109	182
KPRL45X	primary	EAT	PRL4F fusible switch connector kit KPRL45X	EDH-EAT-00416	181
KPRL45X1	primary	EAT	PRL4F fusible switch connector kit 5X (100 A)	EDH-EAT-00109	182
KPRL45X1	superseded_by	EAT	PRL4F fusible switch connector kit KPRL45X	EDH-EAT-00416	181
KPRL45XS	primary	EAT	PRL4F fusible switch connector kit KPRL45XS	EDH-EAT-00417	182
KPRL4B6XS	primary	EAT	PRL4F fusible switch connector kit 6X (200 A)	EDH-EAT-00110	183
KPRL4B6XT	primary	EAT	PRL4F fusible switch connector kit 6X (200 A)	EDH-EAT-00111	183
KPRL4CA	primary	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 2X/3X, CA/CAH/HCA	EDH-EAT-00103	183
KPRL4CKD	primary	EAT	PRL4 breaker connector kit, single-mount 4X, for CKD, CHKD (100% rated)	EDH-EAT-00086	184
KPRL4CND	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for CND, CHND (100% rated)	EDH-EAT-00092	185
KPRL4ED	primary	EAT	PRL4 breaker connector kit, twin-mount 3X, for ED, EDH, EDC	EDH-EAT-00081	185
KPRL4ED	supersedes	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 3X, ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDC	EDH-EAT-00096	203
KPRL4ED2	primary	EAT	PRL4 breaker connector kit, twin-mount 2X, for ED, EDH, EDC	EDH-EAT-00078	186
KPRL4ED2	supersedes	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (	EDH-EAT-00095	202
KPRL4FBP	primary	EAT	PRL4 breaker connector kit, twin-mount 3X, for FCL, FB-P, FD/LFD	EDH-EAT-00080	187
KPRL4FD	primary	EAT	PRL4 breaker connector kit, twin-mount 3X, for EHD, FD, FDB, HFD, FDC	EDH-EAT-00079	187
KPRL4FD	supersedes	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 3X, ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDC	EDH-EAT-00096	203
KPRL4FD1	primary	EAT	PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, HFD	EDH-EAT-00076	188
KPRL4FD1	supersedes	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC (PD2)	EDH-EAT-00094	201
KPRL4FD2	primary	EAT	PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, FDB, HFD, FDC	EDH-EAT-00077	189
KPRL4FD2	supersedes	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (	EDH-EAT-00095	202
KPRL4FDCL	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 3X, FD current limiter (single mo	EDH-EAT-00102	190
KPRL4JDS	primary	EAT	PRL4 breaker connector kit, single-mount 3X, for JD, JDB, HJD, JDC	EDH-EAT-00082	190
KPRL4JDT	primary	EAT	PRL4 breaker connector kit, twin-mount 3X, for JD, JDB, HJD, JDC	EDH-EAT-00083	191
KPRL4KDS	primary	EAT	PRL4 breaker connector kit, single-mount 4X, for DK, KD, KDB, HKD, KDC	EDH-EAT-00084	192
KPRL4KDT	primary	EAT	PRL4 breaker connector kit, twin-mount 4X, for DK, KD, KDB, HKD, KDC	EDH-EAT-00085	192
KPRL4LAP	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for LA-P	EDH-EAT-00088	193
KPRL4LC	superseded_by	EAT	PRL4 breaker connector kit, single-mount 6X, for LD, LDB, HLD, LDC, CLD, LC	EDH-EAT-00089	195

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL4LC	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, LC/LCY/HLC/LD/HLD/LDC/LDB [LA	EDH-EAT-00104	194
KPRL4LCL	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for LCL	EDH-EAT-00087	194
KPRL4LD	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for LD, LDB, HLD, LDC, CLD, LC	EDH-EAT-00089	195
KPRL4LD	supersedes	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, LC/LCY/HLC/LD/HLD/LDC/LDB [LA	EDH-EAT-00104	194
KPRL4LG	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 4X, LHH	EDH-EAT-00105	196
KPRL4MC	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for MDL, HMDL	EDH-EAT-00090	196
KPRL4MC	supersedes	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, PD4	EDH-EAT-00100	205
KPRL4MD	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, CMDL/CHMDL (100% rated	EDH-EAT-00107	197
KPRL4NBP	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for NB-P	EDH-EAT-00091	198
KPRL4NC	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, NC/NCY/HNC [NB/HNB]	EDH-EAT-00106	198
KPRL4ND	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for ND, HND	EDH-EAT-00093	199
KPRL4ND	supersedes	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, PD5	EDH-EAT-00101	206
KPRL4W11X	primary	EAT	PRL4F fusible switch connector kit 11X (600 A)	EDH-EAT-00113	200
KPRL4W15X	primary	EAT	PRL4F fusible switch connector kit 15X (1200 A)	EDH-EAT-00114	201
KPRL4W9X	primary	EAT	PRL4F fusible switch connector kit 9X (400 A)	EDH-EAT-00112	201
KPRL4X12	superseded_by	EAT	PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, HFD	EDH-EAT-00076	188
KPRL4X12	primary	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC (PD2)	EDH-EAT-00094	201
KPRL4X22	superseded_by	EAT	PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, FDB, HFD, FDC	EDH-EAT-00077	189
KPRL4X22	superseded_by	EAT	PRL4 breaker connector kit, twin-mount 2X, for ED, EDH, EDC	EDH-EAT-00078	186
KPRL4X22	primary	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (	EDH-EAT-00095	202
KPRL4X32	superseded_by	EAT	PRL4 breaker connector kit, twin-mount 3X, for EHD, FD, FDB, HFD, FDC	EDH-EAT-00079	187
KPRL4X32	superseded_by	EAT	PRL4 breaker connector kit, twin-mount 3X, for ED, EDH, EDC	EDH-EAT-00081	185
KPRL4X32	primary	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 3X, ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDC	EDH-EAT-00096	203
KPRL4X334S	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 4X, PD3 400 A frame	EDH-EAT-00097	203
KPRL4X334T	primary	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 4X, PD3 400 A frame	EDH-EAT-00098	204
KPRL4X336	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 4X, PD3 600 A frame	EDH-EAT-00099	205
KPRL4X34	superseded_by	EAT	PRL4 breaker connector kit, single-mount 6X, for MDL, HMDL	EDH-EAT-00090	196
KPRL4X34	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, PD4	EDH-EAT-00100	205
KPRL4X35	superseded_by	EAT	PRL4 breaker connector kit, single-mount 6X, for ND, HND	EDH-EAT-00093	199
KPRL4X35	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, PD5	EDH-EAT-00101	206
LD1E060	primary	SIE	Siemens LD1E060 load-side lug, ED 1-pole 30-60A	EDH-SIE-00260	555
LD1E100	primary	SIE	Siemens LD1E100 load-side lug, ED 1-pole 70-100A	EDH-SIE-00261	555
LN1E100	primary	SIE	Siemens LN1E100 lug, ED 30-100A	EDH-SIE-00258	555
LNLK30A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strip	EDH-SIE-00035	518
LNLK42A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	EDH-SIE-00036	519
LNLK4X11B	primary	SIE	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strip	EDH-SIE-00035	518
LNLK54A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	EDH-SIE-00037	520
LNLK5X12A	primary	SIE	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]	EDH-SIE-00033	518
LNLK6X17B	primary	SIE	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	EDH-SIE-00036	519

Number	Type	Mfr	Description	Catalogue ID	Pg
LNLK7X18A	primary	SIE	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]	EDH-SIE-00034	519
LNLK7X20B	primary	SIE	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	EDH-SIE-00037	520
LPP2NB01	primary	SIE	Neutral lug kit	EDH-SIE-00118	454
MB133	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB133	EDH-GEA-00059	296
MB133WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB133WB	EDH-GEA-00060	297
MB233	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB233	EDH-GEA-00051	297
MB2332	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB2332	EDH-GEA-00053	297
MB2332WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB2332WB	EDH-GEA-00054	298
MB233WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB233WB	EDH-GEA-00052	298
MB332	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB332	EDH-GEA-00045	298
MB332WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB332WB	EDH-GEA-00046	299
MB333	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB333	EDH-GEA-00055	299
MB333WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB333WB	EDH-GEA-00056	299
MB423	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB423	EDH-GEA-00057	300
MB426	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB426	EDH-GEA-00058	300
MB512	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB512	EDH-GEA-00044	300
MB513	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB513	EDH-GEA-00049	301
MB516	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB516	EDH-GEA-00050	301
MB612	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB612	EDH-GEA-00042	301
MB613	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB613	EDH-GEA-00047	302
MB614	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB614	EDH-GEA-00043	302
MB616	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB616	EDH-GEA-00048	302
MBKBC1NBA	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	504
MBKBC3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A	EDH-SIE-00045	441
MBKBC3NBA	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	505
MBKBFA	primary	SIE	P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)	EDH-SIE-00014	531
MBKBL1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A	EDH-SIE-00043	441
MBKBL1A	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	504
MBKBL3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A	EDH-SIE-00044	442
MBKBL3A	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	505
MBKED1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A	EDH-SIE-00048	442
MBKED1A	primary	SIE	Revised P1 main/subfeed strap kit, ED, 1-ph, 125A	EDH-SIE-00003	500
MBKED3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A	EDH-SIE-00049	442
MBKED3A	primary	SIE	Revised P1 main/subfeed strap kit, ED, 3-ph, 125A	EDH-SIE-00004	500
MBKFD1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A	EDH-SIE-00052	443
MBKFD1A	primary	SIE	Revised P1 main/subfeed strap kit, FD, 1-ph, 250A	EDH-SIE-00007	501
MBKFD3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A	EDH-SIE-00053	443
MBKFD3A	primary	SIE	Revised P1 main/subfeed strap kit, FD, 3-ph, 250A	EDH-SIE-00008	501
MBKJD1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	EDH-SIE-00054	443
MBKJD1A	supersedes	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	502
MBKJD3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	EDH-SIE-00055	444
MBKJD3A	supersedes	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	502
MBKJD3B	primary	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	502

Number	Type	Mfr	Description	Catalogue ID	Pg
MBKNB1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A	EDH-SIE-00046	444
MBKNB3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A	EDH-SIE-00047	444
MBKQR1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A	EDH-SIE-00050	445
MBKQR1A	primary	SIE	Revised P1 main/subfeed strap kit, QR, 1-ph, 225A	EDH-SIE-00005	502
MBKQR3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A	EDH-SIE-00051	445
MBKQR3A	primary	SIE	Revised P1 main/subfeed strap kit, QR, 3-ph, 225A	EDH-SIE-00006	503
MBKQRFK	primary	SIE	P1 / Revised P1 deadfront filler for 1PH/3PH QR main	EDH-SIE-00075	529
MBKVA41A	primary	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	504
MBKVA41B	primary	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	505
MBKVA5262A	primary	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A	EDH-SIE-00009	506
MBKVA5262B	primary	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A	EDH-SIE-00010	507
MBKVA5363A	primary	SIE	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph	EDH-SIE-00011	507
MBKVA5363JD	primary	SIE	RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)	EDH-SIE-00013	531
MDTERMSHIELD	primary	SIE	Siemens MDTERMSHIELD terminal shield, MD/ND/PD/RD 3-pole	EDH-SIE-00298	571
Mechanical: 100 A G01-G04, 250-600 A G13-G16; Crimp: 100 A G05-G08, 250-600 A G17-G20; Copper lugs: 100 A G09-G12, 250-600 A G21-G24 (order tin Al / bare Cu / silver Cu / tin Cu)	style_number	EAT	PRL3a/PRL3X service entrance bonding jumper kit	EDH-EAT-00342	168
Mechanical main lugs/main breakers: 100-225 A G01 (tin Al) G02 (bare Cu) G03 (silver Cu) G04 (tin Cu); 400-600 A G05-G08. Crimp main lugs: 100-225 A G09-G12; 400-600 A G13-G16. Copper main lugs: 100-225 A G18-G20; 400-600 A G22-G24	style_number	EAT	PRL1a/2a/1X/2X service entrance bonding jumper kit	EDH-EAT-00341	129
MG1	primary	SIE	MG1 connecting strap kit - VL MG (8.75in, single)	EDH-SIE-00149	467
MG1D	primary	SIE	MG1D connecting strap kit - VL MG (8.75in, single)	EDH-SIE-00175	484
MLA1	primary	GEA	A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)	EDH-GEA-00061	303
MLA2	primary	GEA	A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)	EDH-GEA-00062	303
MLA41	primary	GEA	A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)	EDH-GEA-00063	303
MLA61	primary	GEA	A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)	EDH-GEA-00064	304
MLA62	primary	GEA	A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)	EDH-GEA-00065	304
MLKA1	equivalent	SIE	Revised P1 250A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00015	511
MLKA1	primary	SIE	Original P1 250A main lug kit, 1-ph	EDH-SIE-00025	447
MLKA1A	primary	SIE	Revised P1 250A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00015	511
MLKA3	equivalent	SIE	Revised P1 250A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00016	511
MLKA3	primary	SIE	Original P1 250A main lug kit, 3-ph	EDH-SIE-00026	447
MLKA3A	primary	SIE	Revised P1 250A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00016	511
MLKC1	equivalent	SIE	Revised P1 250A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00017	512
MLKC1	primary	SIE	Original P1 250A main lug kit, 1-ph	EDH-SIE-00027	448
MLKC1A	primary	SIE	Revised P1 250A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00017	512
MLKC3	equivalent	SIE	Revised P1 250A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00018	512

Number	Type	Mfr	Description	Catalogue ID	Pg
MLKC3	primary	SIE	Original P1 250A main lug kit, 3-ph	EDH-SIE-00028	448
MLKC3A	primary	SIE	Revised P1 250A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00018	512
MLR1	primary	GEA	A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)	EDH-GEA-00066	304
MLR2	primary	GEA	A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)	EDH-GEA-00067	304
MLR41	primary	GEA	A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)	EDH-GEA-00068	304
MLR61	primary	GEA	A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)	EDH-GEA-00069	305
MLT1	primary	GEA	A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)	EDH-GEA-00070	305
MLT2	primary	GEA	A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)	EDH-GEA-00071	305
MLT41	primary	GEA	A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)	EDH-GEA-00073	305
MLT42	primary	GEA	A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)	EDH-GEA-00072	305
NDTS	primary	SIE	Siemens NDTS wire lug shield / end barrier, MD/ND	EDH-SIE-00289	572
NG1D	primary	SIE	NG1D connecting strap kit - VL NG (10.00in, single)	EDH-SIE-00179	484
NHB150PK	primary	GEA	NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole	EDH-GEA-00280	331
NKA	primary	GEA	A-Series 200% neutral kit NKA (225 A)	EDH-GEA-00074	307
NKA42	primary	GEA	A-Series 200% neutral kit NKA42 (400 A)	EDH-GEA-00075	307
NKA4FT	primary	GEA	A-Series 200% neutral kit NKA4FT (400 A)	EDH-GEA-00080	307
NKR	primary	GEA	A-Series 200% neutral kit NKR (225 A)	EDH-GEA-00076	307
NKR4	primary	GEA	A-Series 200% neutral kit NKR4 (400 A)	EDH-GEA-00077	307
NKT	primary	GEA	A-Series 200% neutral kit NKT (225 A)	EDH-GEA-00078	308
NKT4	primary	GEA	A-Series 200% neutral kit NKT4 (400 A)	EDH-GEA-00079	308
NL300	primary	EAT	Type BR loadcenter add-on neutral/ground lug (NL300)	EDH-EAT-00124	17
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00055	54
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00056	53
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00057	54
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00058	54
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 400/600 A neutral bar (Westinghouse style number)	EDH-EAT-00059	54
P1CONACPHAL	primary	SIE	RP1 A/C-phase replacement aluminum branch connectors, kit of 6	EDH-SIE-00097	513
P1CONACPHCU	primary	SIE	RP1 A/C-phase replacement copper branch connectors	EDH-SIE-00088	513
P1CONBPHAL	primary	SIE	RP1 B-phase replacement aluminum branch connectors	EDH-SIE-00089	514
P1CONBPHCU	primary	SIE	RP1 B-phase replacement copper branch connectors	EDH-SIE-00090	514
P1DFS250AFT	primary	SIE	P1 250A deadfront support	EDH-SIE-00092	521
P1DFS250ANFT	primary	SIE	P1 250A deadfront support	EDH-SIE-00093	521
P1DFS400A	primary	SIE	P1 400A deadfront support (new for 3VA)	EDH-SIE-00094	522
P1SCRWS	primary	SIE	P1 branch breaker mounting screws	EDH-SIE-00091	531
P2BK1	primary	SIE	P2 250A max horizontal main breaker bonding strap kit	EDH-SIE-00120	460
P2BK2	primary	SIE	P2 125A max main lug bonding strap assembly	EDH-SIE-00121	460

Number	Type	Mfr	Description	Catalogue ID	Pg
P2BK3	primary	SIE	P2 250-600A MLO and all vertical MB bonding kit	EDH-SIE-00122	461
P2QRFP01	primary	SIE	P2 QR deadfront filler	EDH-SIE-00082	459
P3BK1	primary	SIE	P3 bonding kit 800A max MLO+MB	EDH-SIE-00123	465
P41X25	primary	EAT	PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)	EDH-EAT-00413	208
PK32DGTA	primary	SQD	Equipment ground bar kit PK32DGTA (I-Line)	EDH-SQD-00156	228
PKDFSCREW	primary	SQD	Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)	EDH-SQD-00161	234
PRLSEBFD	primary	EAT	Service entrance barrier kit for FD main breaker	EDH-EAT-00337	122
PRLSEBGHB	primary	EAT	Service entrance barrier kit for GHB main breaker	EDH-EAT-00338	123
PRLSEBJD	primary	EAT	Service entrance barrier kit for JD main breaker	EDH-EAT-00336	123
PRLSEBLGKD	primary	EAT	Service entrance barrier kit for LG and KD main breaker	EDH-EAT-00335	123
PRLSEBPD2	primary	EAT	Service entrance barrier kit for PDG2 main breaker	EDH-EAT-00340	177
PRLSEBPD3	primary	EAT	Service entrance barrier kit for PDF3/PDG3 main breaker	EDH-EAT-00339	177
PRXP4PD2FILL1	primary	EAT	Pow-R-Xpress PRL4X PD2 1-pole filler	EDH-EAT-00414	209
PT363 top H01 / bottom H02 (7X); PT364 top H03 / bottom H04 (9X)	style_number	EAT	PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt swit	EDH-EAT-00386	163
QF3	equivalent	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	526
QF3	primary	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	547
QMB100R	primary	SQD	QMB Class R fuse kit QMB100R	EDH-SQD-00055	251
QMB12CLA	primary	SQD	QMB main lug compression adaptor kit QMB12CLA (1200 A)	EDH-SQD-00081	235
QMB15BLW	primary	SQD	QMB blank filler plate QMB15BLW (15 in.)	EDH-SQD-00092	244
QMB1BLW	primary	SQD	QMB blank filler plate QMB1BLW (1.5 in.)	EDH-SQD-00089	244
QMB1IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB1IMA	EDH-SQD-00093	248
QMB200EK	primary	SQD	QMB electrical interlock kit QMB200EK	EDH-SQD-00062	251
QMB200EK-1	alias	SQD	QMB electrical interlock kit QMB200EK	EDH-SQD-00062	251
QMB200EK-2	alias	SQD	QMB electrical interlock kit QMB200EK	EDH-SQD-00062	251
QMB210T	primary	SQD	Legacy QMB switch QMB210T (obsolete)	EDH-SQD-00101	286
QMB221HW	primary	SQD	QMB fusible switch unit QMB221HW (2P 240 Vac, 30-blank A)	EDH-SQD-00002	257
QMB221TW	primary	SQD	QMB fusible switch unit QMB221TW (2P 240 Vac, 30-30 A)	EDH-SQD-00001	258
QMB222HW	primary	SQD	QMB fusible switch unit QMB222HW (2P 240 Vac, 60-blank A)	EDH-SQD-00004	258
QMB222TW	primary	SQD	QMB fusible switch unit QMB222TW (2P 240 Vac, 60-60 A)	EDH-SQD-00003	259
QMB223HW	primary	SQD	QMB fusible switch unit QMB223HW (2P 240 Vac, 100-blank A)	EDH-SQD-00006	259
QMB223TW	primary	SQD	QMB fusible switch unit QMB223TW (2P 240 Vac, 100-100 A)	EDH-SQD-00005	260
QMB2240	primary	SQD	Legacy QMB switch QMB2240 (obsolete)	EDH-SQD-00104	286
QMB224W	primary	SQD	QMB fusible switch unit QMB224W (2P 240 Vac, 200 A)	EDH-SQD-00007	260
QMB225W	primary	SQD	QMB fusible switch unit QMB225W (2P 240 Vac, 400 A)	EDH-SQD-00008	261
QMB225WT3	primary	SQD	QMB fusible switch unit QMB225WT3 (2P 240 Vac, 400 A)	EDH-SQD-00009	261
QMB261HW	primary	SQD	QMB fusible switch unit QMB261HW (2P 600 Vac, 30-blank A)	EDH-SQD-00023	262
QMB261TW	primary	SQD	QMB fusible switch unit QMB261TW (2P 600 Vac, 30-30 A)	EDH-SQD-00022	262
QMB262HW	primary	SQD	QMB fusible switch unit QMB262HW (2P 600 Vac, 60-blank A)	EDH-SQD-00025	263
QMB262TW	primary	SQD	QMB fusible switch unit QMB262TW (2P 600 Vac, 60-60 A)	EDH-SQD-00024	263
QMB263HW	primary	SQD	QMB fusible switch unit QMB263HW (2P 600 Vac, 100-blank A)	EDH-SQD-00027	264
QMB263TW	primary	SQD	QMB fusible switch unit QMB263TW (2P 600 Vac, 100-100 A)	EDH-SQD-00026	264
QMB264W	primary	SQD	QMB fusible switch unit QMB264W (2P 600 Vac, 200 A)	EDH-SQD-00028	265
QMB2IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB2IMA	EDH-SQD-00094	248
QMB300EK	primary	SQD	QMB electrical interlock kit QMB300EK	EDH-SQD-00060	251
QMB300EK-1	alias	SQD	QMB electrical interlock kit QMB300EK	EDH-SQD-00060	251
QMB300EK-2	alias	SQD	QMB electrical interlock kit QMB300EK	EDH-SQD-00060	251
QMB303T	primary	SQD	Legacy QMB switch QMB303T (obsolete)	EDH-SQD-00135	286

Number	Type	Mfr	Description	Catalogue ID	Pg
QMB306EX	primary	SQD	QMB plug-on extension assembly QMB306EX (legacy QW retrofit)	EDH-SQD-00106	284
QMB306LEX	primary	SQD	QMB plug-on extension assembly QMB306LEX (legacy QW retrofit)	EDH-SQD-00107	284
QMB306T	primary	SQD	Legacy QMB switch QMB306T (obsolete)	EDH-SQD-00136	286
QMB310EX	primary	SQD	QMB plug-on extension assembly QMB310EX (legacy QW retrofit)	EDH-SQD-00108	285
QMB310LEX	primary	SQD	QMB plug-on extension assembly QMB310LEX (legacy QW retrofit)	EDH-SQD-00109	285
QMB310T	primary	SQD	Legacy QMB switch QMB310T (obsolete)	EDH-SQD-00100	287
QMB320EX	primary	SQD	QMB plug-on extension assembly QMB320EX (legacy QW retrofit)	EDH-SQD-00110	285
QMB-320-EX	alias	SQD	QMB plug-on extension assembly QMB320EX (legacy QW retrofit)	EDH-SQD-00110	285
QMB321HW	primary	SQD	QMB fusible switch unit QMB321HW (3P 240 Vac, 30-blank A)	EDH-SQD-00011	265
QMB321TW	primary	SQD	QMB fusible switch unit QMB321TW (3P 240 Vac, 30-30 A)	EDH-SQD-00010	266
QMB322HW	primary	SQD	QMB fusible switch unit QMB322HW (3P 240 Vac, 60-blank A)	EDH-SQD-00013	266
QMB322TD	alias	SQD	QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)	EDH-SQD-00012	266
QMB322TW	primary	SQD	QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)	EDH-SQD-00012	266
QMB323HW	primary	SQD	QMB fusible switch unit QMB323HW (3P 240 Vac, 100-blank A)	EDH-SQD-00015	267
QMB323TD	alias	SQD	QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)	EDH-SQD-00014	267
QMB323TD	primary	SQD	QMB replacement switch QMB323TD for legacy interiors	EDH-SQD-00117	287
QMB323TW	primary	SQD	QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)	EDH-SQD-00014	267
QMB3240	primary	SQD	Legacy QMB switch QMB3240 (obsolete)	EDH-SQD-00103	287
QMB324W	primary	SQD	QMB fusible switch unit QMB324W (3P 240 Vac, 200 A)	EDH-SQD-00016	268
QMB325W	primary	SQD	QMB fusible switch unit QMB325W (3P 240 Vac, 400 A)	EDH-SQD-00017	269
QMB325WT3	primary	SQD	QMB fusible switch unit QMB325WT3 (3P 240 Vac, 400 A)	EDH-SQD-00018	269
QMB3260	primary	SQD	Legacy QMB switch QMB3260 (obsolete)	EDH-SQD-00105	287
QMB326W	primary	SQD	QMB fusible switch unit QMB326W (3P 240 Vac, 600 A)	EDH-SQD-00019	270
QMB326WT3	primary	SQD	QMB fusible switch unit QMB326WT3 (3P 240 Vac, 600 A)	EDH-SQD-00020	270
QMB327WT3	primary	SQD	QMB fusible switch unit QMB327WT3 (3P 240 Vac, 800 A)	EDH-SQD-00021	271
QMB3300LA	primary	SQD	QMB circuit breaker unit QMB3300LA	EDH-SQD-00112	283
QMB3400LA	primary	SQD	QMB circuit breaker unit QMB3400LA	EDH-SQD-00111	283
QMB3606T	primary	SQD	Legacy QMB switch QMB3606T (obsolete)	EDH-SQD-00099	287
QMB361HW	primary	SQD	QMB fusible switch unit QMB361HW (3P 600 Vac, 30-blank A)	EDH-SQD-00030	271
QMB361TW	primary	SQD	QMB fusible switch unit QMB361TW (3P 600 Vac, 30-30 A)	EDH-SQD-00029	272
QMB3620	primary	SQD	Legacy QMB switch QMB3620 (obsolete)	EDH-SQD-00102	288
QMB362HW	primary	SQD	QMB fusible switch unit QMB362HW (3P 600 Vac, 60-blank A)	EDH-SQD-00032	272
QMB362T	alias	SQD	QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)	EDH-SQD-00031	273
QMB362T	primary	SQD	QMB replacement switch QMB362T for legacy interiors	EDH-SQD-00115	288
QMB362T21W	primary	SQD	QMB fusible switch unit QMB362T21W (3P 600 Vac, 60-30 A)	EDH-SQD-00033	273
QMB362TW	primary	SQD	QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)	EDH-SQD-00031	273
QMB363HW	primary	SQD	QMB fusible switch unit QMB363HW (3P 600 Vac, 100-blank A)	EDH-SQD-00035	274
QMB363T31W	primary	SQD	QMB fusible switch unit QMB363T31W (3P 600 Vac, 100-30 A)	EDH-SQD-00036	274
QMB363T32W	primary	SQD	QMB fusible switch unit QMB363T32W (3P 600 Vac, 100-60 A)	EDH-SQD-00037	275
QMB363TW	primary	SQD	QMB fusible switch unit QMB363TW (3P 600 Vac, 100-100 A)	EDH-SQD-00034	275
QMB364	primary	SQD	QMB replacement switch QMB364 for legacy interiors	EDH-SQD-00116	288
QMB3640	primary	SQD	Legacy QMB switch QMB3640 (obsolete)	EDH-SQD-00134	288
QMB364W	primary	SQD	QMB fusible switch unit QMB364W (3P 600 Vac, 200 A)	EDH-SQD-00038	276
QMB365W	primary	SQD	QMB fusible switch unit QMB365W (3P 600 Vac, 400 A)	EDH-SQD-00039	276
QMB365WT6	primary	SQD	QMB fusible switch unit QMB365WT6 (3P 600 Vac, 400 A)	EDH-SQD-00040	277
QMB366W	primary	SQD	QMB fusible switch unit QMB366W (3P 600 Vac, 600 A)	EDH-SQD-00041	277

Number	Type	Mfr	Description	Catalogue ID	Pg
QMB367W	primary	SQD	QMB fusible switch unit QMB367W (3P 600 Vac, 800 A)	EDH-SQD-00042	278
QMB368W	primary	SQD	QMB fusible switch unit QMB368W (3P 600 Vac, 1200 A, 24 in.)	EDH-SQD-00043	294
QMB36R	primary	SQD	QMB Class R fuse kit QMB36R	EDH-SQD-00053	252
QMB3BLW	primary	SQD	QMB blank filler plate QMB3BLW (3 in.)	EDH-SQD-00090	244
QMB3IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB3IMA	EDH-SQD-00095	248
QMB4060R	primary	SQD	QMB Class R fuse kit QMB4060R	EDH-SQD-00057	252
QMB4IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB4IMA	EDH-SQD-00096	249
QMB600T6	primary	SQD	QMB Class T fuse adapter kit QMB600T6	EDH-SQD-00058	247
QMB60R	primary	SQD	QMB Class R fuse kit QMB60R	EDH-SQD-00054	252
QMB610EK	primary	SQD	QMB electrical interlock kit QMB610EK	EDH-SQD-00061	253
QMB610EK-1	alias	SQD	QMB electrical interlock kit QMB610EK	EDH-SQD-00061	253
QMB610EK-2	alias	SQD	QMB electrical interlock kit QMB610EK	EDH-SQD-00061	253
QMB6BLW	primary	SQD	QMB blank filler plate QMB6BLW (6 in.)	EDH-SQD-00091	245
QMB800T6	primary	SQD	QMB Class T fuse adapter kit QMB800T6	EDH-SQD-00059	247
QMB8CLA	primary	SQD	QMB main lug compression adaptor kit QMB8CLA (800 A)	EDH-SQD-00080	236
QMB8IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB8IMA	EDH-SQD-00097	249
QMJ361T	primary	SQD	QMJ fusible switch unit QMJ361T (30-30 A)	EDH-SQD-00044	278
QMJ362T	primary	SQD	QMJ fusible switch unit QMJ362T (60-60 A)	EDH-SQD-00045	279
QMJ363H	primary	SQD	QMJ fusible switch unit QMJ363H (100-blank A)	EDH-SQD-00047	279
QMJ363T	primary	SQD	QMJ fusible switch unit QMJ363T (100-100 A)	EDH-SQD-00046	280
QMJ364H	primary	SQD	QMJ fusible switch unit QMJ364H (200-blank A)	EDH-SQD-00049	280
QMJ364T	primary	SQD	QMJ fusible switch unit QMJ364T (200-200 A)	EDH-SQD-00048	281
QMJ365	primary	SQD	QMJ fusible switch unit QMJ365 (400 A)	EDH-SQD-00050	281
QMJ366	primary	SQD	QMJ fusible switch unit QMJ366 (600 A)	EDH-SQD-00051	282
QMRFP1	primary	GEA	QMR panelboard filler plate 1X	EDH-GEA-00272	330
QMRFP2	primary	GEA	QMR panelboard filler plate 2X	EDH-GEA-00273	330
QMRFP5	primary	GEA	QMR panelboard filler plate 5X	EDH-GEA-00274	330
QW1BL	primary	SQD	Legacy QW interior blank filler QW1BL	EDH-SQD-00113	283
QW3BL	primary	SQD	Legacy QW interior blank filler QW3BL	EDH-SQD-00114	284
RS2641	primary	SIE	Siemens RS2641 rear-connecting stud, All ED, line side (long) 4.88 in	EDH-SIE-00301	557
RS2642	primary	SIE	Siemens RS2642 rear-connecting stud, All ED, load side (long) 4.88 in	EDH-SIE-00302	557
RS2643	primary	SIE	Siemens RS2643 rear-connecting stud, All ED, line side (short) 2.38 in	EDH-SIE-00299	558
RS2644	primary	SIE	Siemens RS2644 rear-connecting stud, All ED, load side (short) 2.38 in	EDH-SIE-00300	558
RS4755	primary	SIE	Siemens RS4755 rear-connecting stud, All FD, long (line or load) 7.06 in	EDH-SIE-00304	560
RS4756	primary	SIE	Siemens RS4756 rear-connecting stud, All FD, short (line or load) 3.12 in	EDH-SIE-00303	560
RS5773	primary	SIE	Siemens RS5773 rear-connecting stud, All JD, long 11.20 in	EDH-SIE-00306	564
RS5774	primary	SIE	Siemens RS5774 rear-connecting stud, All JD, short 5.85 in	EDH-SIE-00305	564
RS5783	primary	SIE	Siemens RS5783 rear-connecting stud, All LD, long 11.20 in	EDH-SIE-00308	565
RS5784	primary	SIE	Siemens RS5784 rear-connecting stud, All LD, short 5.85 in	EDH-SIE-00307	565
RS5785	primary	SIE	Siemens RS5785 rear-connecting stud, All MD, ND, long 8.00 in	EDH-SIE-00312	572
RS5786	primary	SIE	Siemens RS5786 rear-connecting stud, All MD, ND, short 5.50 in	EDH-SIE-00311	573
RS5787	primary	SIE	Siemens RS5787 rear-connecting stud, LM(X)D6, HLM(X)D6, long 11.20 in	EDH-SIE-00310	573
RS5788	primary	SIE	Siemens RS5788 rear-connecting stud, LM(X)D6, HLM(X)D6, short 5.85 in	EDH-SIE-00309	573
S33930	primary	SQD	I-Line plug-on sub-feed lug kit S33930	EDH-SQD-00152	226

Number	Type	Mfr	Description	Catalogue ID	Pg
S3VA41T	primary	SIE	S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)	EDH-SIE-00125	467
S3VA41TD	primary	SIE	S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)	EDH-SIE-00151	485
S3VA41TDHD	primary	SIE	S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)	EDH-SIE-00152	485
S3VA52PR	primary	SIE	3VA52/61/62 breaker provision hardware kit (twin mount)	EDH-SIE-00205	480
S3VA52T	primary	SIE	S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00129	468
S3VA52TD	primary	SIE	S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00156	486
S3VA53PR	primary	SIE	3VA53/63/54/64 single-mount breaker provision hardware kit	EDH-SIE-00206	552
S3VA53T	primary	SIE	S3VA53T connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00135	468
S3VA53T2D	primary	SIE	S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)	EDH-SIE-00182	548
S3VA53TD	primary	SIE	S3VA53TD connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00161	486
S3VA54T	primary	SIE	S3VA54T connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00142	469
S3VA54T2D	primary	SIE	S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)	EDH-SIE-00185	548
S3VA54TD	primary	SIE	S3VA54TD connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00168	487
S3VA55TD	primary	SIE	S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)	EDH-SIE-00186	549
S3VA57TD	primary	SIE	S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)	EDH-SIE-00187	549
S3VA63T	primary	SIE	S3VA63T connecting strap kit - 3VA63 (6.25in, single)	EDH-SIE-00136	469
S3VA63TD	primary	SIE	S3VA63TD connecting strap kit - 3VA63 (6.25in, single)	EDH-SIE-00162	487
S3VA64T	primary	SIE	S3VA64T connecting strap kit - 3VA64 (6.25in, single)	EDH-SIE-00143	470
S3VA64TD	primary	SIE	S3VA64TD connecting strap kit - 3VA64 (6.25in, single)	EDH-SIE-00169	488
SA1E025	primary	SIE	Siemens SA1E025 lug, ED 2/3-pole 15-25A	EDH-SIE-00257	556
Same H scheme as 6554C01 (4X = H13, 5X = H14)	style_number	EAT	PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)	EDH-EAT-00412	208
SBL	primary	SIE	SBL connecting strap kit - BL, BQD (3.75in, twin)	EDH-SIE-00124	470
SBLBD	primary	SIE	SBLBD connecting strap kit - BL, BQD (3.75in, twin)	EDH-SIE-00150	488
SCE	primary	SIE	SCE connecting strap kit - CED (3.75in, twin)	EDH-SIE-00128	471
SCED	primary	SIE	SCED connecting strap kit - CED (3.75in, twin)	EDH-SIE-00180	550
SCF	primary	SIE	SCF connecting strap kit - Sentron CFD (5.00in, single)	EDH-SIE-00134	471
SCFD	primary	SIE	SCFD connecting strap kit - Sentron CFD (5.00in, single)	EDH-SIE-00160	489
SCJ	primary	SIE	SCJ connecting strap kit - Sentron CJD (8.75in, single)	EDH-SIE-00139	471
SCJD	primary	SIE	SCJD connecting strap kit - Sentron CJD (8.75in, single)	EDH-SIE-00167	489
SCL	primary	SIE	SCL connecting strap kit - Sentron CLD (8.75in, single)	EDH-SIE-00146	472
SCLD	primary	SIE	SCLD connecting strap kit - Sentron CLD (8.75in, single)	EDH-SIE-00172	490
SCPFP1	primary	GEA	SCP+ panelboard filler plate 1X	EDH-GEA-00276	335
SCPFP2	primary	GEA	SCP+ panelboard filler plate 2X	EDH-GEA-00277	335
SCPFP3	primary	GEA	SCP+ panelboard filler plate 3X	EDH-GEA-00278	336
SCPFP5	primary	GEA	SCP+ panelboard filler plate 5X	EDH-GEA-00279	336
SDGD	primary	SIE	SDGD connecting strap kit - VL DG (5.00in, twin)	EDH-SIE-00130	472
SE3LCK	primary	GEA	GE SE3LCK lug cover kit, SE150 line end	EDH-GEA-00347	428
SE3LCKL	primary	GEA	GE SE3LCKL lug cover kit, SE150 (modified for SEFR1 handle)	EDH-GEA-00348	428
SE6	primary	SIE	SE6 connecting strap kit - ED (3.75in, twin)	EDH-SIE-00127	473
SE6D	primary	SIE	SE6D connecting strap kit - ED (3.75in, twin)	EDH-SIE-00154	490
SEBKP1P2P3V1	primary	SIE	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main	EDH-SIE-00231	522
SEBKP2V1	primary	SIE	SEB kit, P2 BL/BQD horizontal main	EDH-SIE-00232	455
SEBKP2V2	primary	SIE	SEB kit, P2 xGB horizontal main	EDH-SIE-00233	455
SEBKP2V3	primary	SIE	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main	EDH-SIE-00234	455
SEBKP2V4	primary	SIE	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main	EDH-SIE-00235	456
SEBKP2V5	primary	SIE	SEB kit (P2, P2 w/SEM3) ED horizontal main	EDH-SIE-00236	456

Number	Type	Mfr	Description	Catalogue ID	Pg
SEBKP2V6	primary	SIE	SEB kit (P2, P2 w/SEM3) ED vertical main	EDH-SIE-00237	456
SEBKP2V7	primary	SIE	SEB kit, P2/P3 3VA52/61/62 horizontal main	EDH-SIE-00238	457
SEBKP3V1	primary	SIE	Service entrance barrier kit CFD, FD (P3 only)	EDH-SIE-00239	464
SEBKRP1V1	primary	SIE	SEB kit for RP1 with FD, QJ or QR horizontal main	EDH-SIE-00224	522
SEBKRP1V2	primary	SIE	SEB kit for RP1 with ED horizontal main	EDH-SIE-00225	523
SEBKRP1V3	primary	SIE	SEB kit for RP1 with back-fed BL/BQD main in unit space	EDH-SIE-00226	523
SEBKRP1V4	primary	SIE	SEB kit for RP1 with back-fed xGB main in unit space	EDH-SIE-00227	523
SEBKRP1V5	primary	SIE	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets	EDH-SIE-00228	524
SEBKRP1V6	primary	SIE	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit	EDH-SIE-00229	524
SEBKRP1V7	primary	SIE	SEB kit for RP1 with 3VA52/61/62 horizontal main	EDH-SIE-00230	524
SEBP4V1	primary	SIE	Service entrance barrier for (S)JD, (S)LD, MG mains	EDH-SIE-00217	477
SEBP4V2	primary	SIE	Service entrance barrier for CJD, CLD	EDH-SIE-00218	478
SEBP4V3	primary	SIE	Service entrance barrier for JG, LG	EDH-SIE-00219	478
SEBP5V1	primary	SIE	Service entrance barrier for (S)MD, (S)ND without shield	EDH-SIE-00220	498
SEBP5V2	primary	SIE	Service entrance barrier for (S)MD, (S)ND with shield	EDH-SIE-00221	498
SEBP5V3	primary	SIE	Service entrance barrier for Vacu-Break switches	EDH-SIE-00222	498
SEBP5V4	primary	SIE	Service entrance barrier for HCP switches	EDH-SIE-00223	498
SF2DPK	primary	GEA	CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)	EDH-GEA-00262	326
SF3LCK	primary	GEA	GE SF3LCK lug cover kit, SF250 line end	EDH-GEA-00349	431
SF6	primary	SIE	SF6 connecting strap kit - Sentron FD (5.00in, twin)	EDH-SIE-00133	473
SF6D	primary	SIE	SF6D connecting strap kit - Sentron FD (5.00in, twin)	EDH-SIE-00159	491
SFG	primary	SIE	SFG connecting strap kit - VL FG (5.00in, twin)	EDH-SIE-00132	473
SFGD	primary	SIE	SFGD connecting strap kit - VL FG (5.00in, twin)	EDH-SIE-00158	491
SG1BCK	primary	GEA	GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)	EDH-GEA-00351	434
SG1BCK4 (as printed 2019)	alias	GEA	GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)	EDH-GEA-00351	434
SG1LCK	primary	GEA	GE SG1LCK 3-pole lug cover, SG600	EDH-GEA-00350	434
SGB2	primary	SIE	SGB2 connecting strap kit - xGB2 (3.75in, twin)	EDH-SIE-00126	474
SGB2D	primary	SIE	SGB2D connecting strap kit - xGB2 (3.75in, twin)	EDH-SIE-00153	492
SGBCS1	primary	GEA	GE SGBCS1 back-connected line/load stud, SG600, 2 13/16 in (short)	EDH-GEA-00392	434
SGBCS2	primary	GEA	GE SGBCS2 back-connected line/load stud, SG600, 6 1/16 in (long)	EDH-GEA-00393	435
SGLVK	primary	GEA	GE SGLVK line voltage control wire kit, SG600	EDH-GEA-00362	435
SJ1	primary	SIE	SJ1 connecting strap kit - Sentron JD (8.75in, single)	EDH-SIE-00138	474
SJ1D	primary	SIE	SJ1D connecting strap kit - Sentron JD (8.75in, single)	EDH-SIE-00165	492
SJ2D	primary	SIE	SJ2D connecting strap kit - Sentron JD (8.75in, twin)	EDH-SIE-00166	493
SJG	primary	SIE	SJG connecting strap kit - VL JG (6.25in, single)	EDH-SIE-00137	474
SJG1D	primary	SIE	SJG1D connecting strap kit - VL JG (6.25in, single)	EDH-SIE-00164	493
SJG2D	primary	SIE	SJG2D connecting strap kit - VL JG (6.25in, twin)	EDH-SIE-00163	494
SK12SPK	primary	GEA	CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)	EDH-GEA-00266	326
SK1LCK	primary	GEA	GE SK1LCK lug cover, SK1200	EDH-GEA-00352	438
SK1LCK3 (as printed 2019)	alias	GEA	GE SK1LCK lug cover, SK1200	EDH-GEA-00352	438
SK8SPK	primary	GEA	CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)	EDH-GEA-00265	326
SKLVK	primary	GEA	GE SKLVK line voltage control wire kit, K1200/SK1200	EDH-GEA-00333	418
SKLVK6 / SKLVK8 (as printed)	alias	GEA	GE SKLVK line voltage control wire kit, K1200/SK1200	EDH-GEA-00333	418
SKPSHLD	primary	GEA	GE SKPSHLD lug cover/arc shield, SKPA upper end	EDH-GEA-00353	438

Number	Type	Mfr	Description	Catalogue ID	Pg
SL100	primary	SQD	I-Line plug-on sub-feed lug kit SL100	EDH-SQD-00153	226
SL1200P5	primary	SQD	I-Line plug-on sub-feed lug kit SL1200P5	EDH-SQD-00149	226
SL1200P6	primary	SQD	I-Line plug-on sub-feed lug kit SL1200P6	EDH-SQD-00150	227
SL1200P7	primary	SQD	I-Line plug-on sub-feed lug kit SL1200P7	EDH-SQD-00151	227
SL250	primary	SQD	I-Line plug-on sub-feed lug kit SL250	EDH-SQD-00146	227
SL400	primary	SQD	I-Line plug-on sub-feed lug kit SL400	EDH-SQD-00147	228
SL6	primary	SIE	SL6 connecting strap kit - Sentron LD (8.75in, single)	EDH-SIE-00145	475
SL6D	primary	SIE	SL6D connecting strap kit - Sentron LD (8.75in, single)	EDH-SIE-00171	494
SL800	primary	SQD	I-Line plug-on sub-feed lug kit SL800	EDH-SQD-00154	228
SL800M5	primary	SQD	I-Line plug-on sub-feed lug kit SL800M5	EDH-SQD-00148	228
SLG	primary	SIE	SLG connecting strap kit - VL LG (6.25in, single)	EDH-SIE-00144	475
SLGD	primary	SIE	SLGD connecting strap kit - VL LG (6.25in, single)	EDH-SIE-00170	495
SLM1D	primary	SIE	SLM1D connecting strap kit - Sentron LMD (8.75in, single)	EDH-SIE-00176	495
SMBKED1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph	EDH-SIE-00056	532
SMBKED3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph	EDH-SIE-00057	533
SMBKFD1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph	EDH-SIE-00058	533
SMBKFD3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph	EDH-SIE-00059	533
SMBKJD1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph	EDH-SIE-00060	534
SMBKJD3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph	EDH-SIE-00061	534
SMND	primary	SIE	SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)	EDH-SIE-00177	496
SQR	primary	SIE	SQR connecting strap kit - QR (5.00in, twin)	EDH-SIE-00131	475
SQRC	primary	SIE	QR cover plate for P4/P5/SPP power panels	EDH-SIE-00210	480
SQRD	primary	SIE	SQRD connecting strap kit - QR (5.00in, twin)	EDH-SIE-00181	550
SSCJ	primary	SIE	SSCJ connecting strap kit - Sentron SCJD (8.75in, single)	EDH-SIE-00141	476
SSCJD	primary	SIE	SSCJD connecting strap kit - SCJD (8.75in, single)	EDH-SIE-00184	551
SSCL	primary	SIE	SSCL connecting strap kit - Sentron SCLD (8.75in, single)	EDH-SIE-00148	476
SSCLD	primary	SIE	SSCLD connecting strap kit - Sentron SCLD (8.75in, single)	EDH-SIE-00174	496
SSJ1	primary	SIE	SSJ1 connecting strap kit - Sentron SJD (8.75in, single)	EDH-SIE-00140	477
SSJ1D	primary	SIE	SSJ1D connecting strap kit - SJD (8.75in, single)	EDH-SIE-00183	551
SSL6	primary	SIE	SSL6 connecting strap kit - Sentron SLD (8.75in, single)	EDH-SIE-00147	477
SSL6D	primary	SIE	SSL6D connecting strap kit - Sentron SLD (8.75in, single)	EDH-SIE-00173	497
SSMND	primary	SIE	SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)	EDH-SIE-00178	497
STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	style_number	EAT	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	EDH-EAT-00344	120
STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	style_number	EAT	PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 i	EDH-EAT-00355	116
STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	style_number	EAT	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00348	120
STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2	style_number	EAT	PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing	EDH-EAT-00353	119
STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	style_number	EAT	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A	EDH-EAT-00352	121

Number	Type	Mfr	Description	Catalogue ID	Pg
STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00349	118
STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	style_number	EAT	PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 i	EDH-EAT-00356	120
STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 d	EDH-EAT-00345	117
STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	style_number	EAT	PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (3	EDH-EAT-00343	117
STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% ne	EDH-EAT-00347	118
STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mech	EDH-EAT-00354	119
STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	style_number	EAT	PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical	EDH-EAT-00346	117
STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mech	EDH-EAT-00350	118
TA1E6125	primary	SIE	Siemens TA1E6125 lug, ED 110-125A	EDH-SIE-00259	556
TA1FD350A	primary	SIE	Siemens TA1FD350A lug, FD 70-250A	EDH-SIE-00265	559
TA1L6750	primary	SIE	Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil	EDH-SIE-00273	561
TA1Q1	primary	SIE	Siemens TA1Q1 line-side lug, BQ 45-125A	EDH-SIE-00247	553
TA1Q300	primary	SIE	Siemens TA1Q300 3-lug kit, QJ2 (distributor data)	EDH-SIE-00256	575
TA2J630	primary	SIE	Siemens TA2J630 lug, SJD6-B 65-200A	EDH-SIE-00270	561
TA2J6500	primary	SIE	Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil	EDH-SIE-00269	562
TA2K500	primary	SIE	Siemens TA2K500 lug, LMD/MD 500-600A, 1-2 x #1-500	EDH-SIE-00277	570
TA2N750	primary	SIE	Siemens TA2N750 lug, MD 500-800A (100% rated), 500-750 kcmil	EDH-SIE-00280	570
TA3K500	primary	SIE	Siemens TA3K500 lug, LMD/MD 500-800A, 1-3 x 1/0-500	EDH-SIE-00278	571
TA4P750	primary	SIE	Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)	EDH-SIE-00297	577
TA5P600	primary	SIE	Siemens TA5P600 lug, PD 1200-1600A, 1-5 x 300-600 kcmil	EDH-SIE-00294	577
TA6ED06	primary	SIE	Siemens TA6ED06 distribution lug, ED	EDH-SIE-00264	556
TA6FD04	primary	SIE	Siemens TA6FD04 distribution lug, FD	EDH-SIE-00268	559
TA6GG04	primary	SIE	Siemens TA6GG04 distribution lug, NGG/HGG/LGG	EDH-SIE-00250	574
TA6JD20	primary	SIE	Siemens TA6JD20 distribution lug, JD/LD	EDH-SIE-00275	562
TA6R600	primary	SIE	Siemens TA6R600 lug, PD/RD 1200-2000A, 1-6 x 300-600 kcmil	EDH-SIE-00295	578
TAD3	primary	EAT	TAD3 line-side adapter / spacer kit for Series C K-frame on LB-frame connectors	EDH-EAT-00015	43
TC012	primary	GEA	GE TC012 copper-only lug, E150/TB1 thru 150A	EDH-GEA-00287	396
TC0121	primary	GEA	GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A	EDH-GEA-00315	411
TC0131	primary	GEA	GE TC0131 copper lug, TK4V load end	EDH-GEA-00324	411
TC018	primary	GEA	GE TC018 (TCO18) plated copper lug, SE150	EDH-GEA-00354	426
TC024	primary	GEA	GE TC024 copper-only lug, TFJ 250A	EDH-GEA-00290	401
TC041	primary	GEA	GE TC041 copper-only lug, K1200/TB6 300-400A	EDH-GEA-00303	412
TC0416 / TC0414	alias	GEA	GE TC041 copper-only lug, K1200/TB6 300-400A	EDH-GEA-00303	412
TC043	primary	GEA	GE TC043 copper-only lug, J400/TB4	EDH-GEA-00297	404

Number	Type	Mfr	Description	Catalogue ID	Pg
TC061	primary	GEA	GE TC061 copper-only lug, K1200/TB6 300-600A	EDH-GEA-00307	412
TC063	primary	GEA	GE TC063 copper-only lug, J600	EDH-GEA-00298	404
TC081A	primary	GEA	GE TC081A copper lug, K1200/TB8/SK1200 600-800A	EDH-GEA-00311	413
TC091	primary	GEA	GE TC091 copper lug, TK4V load end	EDH-GEA-00323	413
TC1ED6150	primary	SIE	Siemens TC1ED6150 copper-body lug, ED 30-125A	EDH-SIE-00262	556
TC1FD350	primary	SIE	Siemens TC1FD350 copper lug, FD 70-250A	EDH-SIE-00266	559
TC1J6600	primary	SIE	Siemens TC1J6600 copper lug, JD/LD (100% rated)	EDH-SIE-00271	562
TC1Q1	primary	SIE	Siemens TC1Q1 line-side lug, BQ 15-40A (steel)	EDH-SIE-00245	553
TC2J6500	primary	SIE	Siemens TC2J6500 copper lug, JD/LD (100% rated)	EDH-SIE-00272	563
TC2K500	primary	SIE	Siemens TC2K500 copper lug, MD 500-600A	EDH-SIE-00279	571
TC5R600	primary	SIE	Siemens TC5R600 copper lug, RD 1600-2000A (also 100% PD)	EDH-SIE-00296	578
TCAL12	primary	GEA	GE TCAL12 lug, E150/THLC1/TB1 15-60A	EDH-GEA-00284	397
TCAL121	primary	GEA	GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00312	414
TCAL1214 / TCAL1212	alias	GEA	GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00312	414
TCAL122	primary	GEA	GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al	EDH-GEA-00316	414
TCAL1225 / TCAL1223	alias	GEA	GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al	EDH-GEA-00316	414
TCAL124	primary	GEA	GE TCAL124 lug, Spectra SK1200, (3) 350-750 kcmil	EDH-GEA-00341	437
TCAL125	primary	GEA	GE TCAL125 lug, Spectra SK1200, (4) 250-500 kcmil	EDH-GEA-00344	437
TCAL12A	primary	GEA	GE TCAL12A lug, E150/THLC1/TB1 70-90A	EDH-GEA-00285	397
TCAL131	primary	GEA	GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00322	415
TCAL1314 / TCAL1312	alias	GEA	GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00322	415
TCAL14	primary	GEA	GE TCAL14 lug, E150/THLC1/TB1 15-30A, (1) #14-8	EDH-GEA-00283	397
TCAL15	primary	GEA	GE TCAL15 lug, E150/THLC1/TB1 100-150A	EDH-GEA-00286	398
TCAL18	primary	GEA	GE TCAL18 lug, Spectra SE150, (1) #12-3/0	EDH-GEA-00335	427
TCAL18LV	primary	GEA	GE TCAL18LV lug with control-voltage quick connect, SE150	EDH-GEA-00360	427
TCAL19PD1	primary	GEA	GE TCAL19PD1 power distribution lug, SE1/TED 125A	EDH-GEA-00363	427
TCAL19PD3	primary	GEA	GE TCAL19PD3 3-lug power distribution kit, SE1/TED	EDH-GEA-00364	425
TCAL24	primary	GEA	GE TCAL24 lug, F225, (1) #4-300 kcmil Cu-Al	EDH-GEA-00288	401
TCAL25	primary	GEA	GE TCAL25 lug, TQD, (1) #4-300 kcmil Cu-Al	EDH-GEA-00281	439
TCAL27	primary	GEA	GE TCAL27 lug, THLC2, (1) #4-300 kcmil Cu-Al	EDH-GEA-00291	401
TCAL28PD1	primary	GEA	GE TCAL28PD1 power distribution lug, SF 250A	EDH-GEA-00365	429
TCAL28PD3	primary	GEA	GE TCAL28PD3 3-lug power distribution kit, SF	EDH-GEA-00366	428
TCAL29	primary	GEA	GE TCAL29 lug, Spectra SF250, (1) #8-350 kcmil	EDH-GEA-00337	430
TCAL29LV	primary	GEA	GE TCAL29LV lug with control-voltage quick connect, SF250	EDH-GEA-00361	430
TCAL40PD1	primary	GEA	GE TCAL40PD1 power distribution lug, SG 400A	EDH-GEA-00367	433
TCAL40PD3	primary	GEA	GE TCAL40PD3 3-lug power distribution kit, SG	EDH-GEA-00368	431
TCAL41	primary	GEA	GE TCAL41 lug, K1200/TB6 300-400A	EDH-GEA-00301	415
TCAL43	primary	GEA	GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD	EDH-GEA-00292	404
TCAL433	alias	GEA	GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD	EDH-GEA-00292	404
TCAL47	primary	GEA	GE TCAL47 lug, J400/TJD, (1) 750 kcmil Cu-Al	EDH-GEA-00293	405
TCAL61	primary	GEA	GE TCAL61 lug, K1200/TB6 300-600A, (2) 2/0-500	EDH-GEA-00304	415
TCAL63	primary	GEA	GE TCAL63 lug, J600 450-600A	EDH-GEA-00295	405
TCAL81	primary	GEA	GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500	EDH-GEA-00308	416
TCAL812 / TCAL811	alias	GEA	GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500	EDH-GEA-00308	416
TCAL91	primary	GEA	GE TCAL91 lug, TK4V load end, (3) 3/0-500	EDH-GEA-00319	416
TCAL912 / TCAL911	alias	GEA	GE TCAL91 lug, TK4V load end, (3) 3/0-500	EDH-GEA-00319	416
TCALK2121	primary	GEA	GE TCALK2121 2-lug kit with wrench (TCAL121)	EDH-GEA-00313	407
TCALK21214 / TCALK21212	alias	GEA	GE TCALK2121 2-lug kit with wrench (TCAL121)	EDH-GEA-00313	407

Number	Type	Mfr	Description	Catalogue ID	Pg
TCALK2122	primary	GEA	GE TCALK2122 2-lug kit (TCAL122)	EDH-GEA-00317	407
TCALK21225 / TCALK21223	alias	GEA	GE TCALK2122 2-lug kit (TCAL122)	EDH-GEA-00317	407
TCALK2124	primary	GEA	GE TCALK2124 2-lug kit with wrench (TCAL124)	EDH-GEA-00342	435
TCALK2125	primary	GEA	GE TCALK2125 2-lug kit with wrench (TCAL125)	EDH-GEA-00345	436
TCALK261	primary	GEA	GE TCALK261 2-lug kit with wrench, K1200/TB6	EDH-GEA-00305	407
TCALK281	primary	GEA	GE TCALK281 2-lug kit with wrench (TCAL81)	EDH-GEA-00309	408
TCALK2812 / TCALK2811	alias	GEA	GE TCALK281 2-lug kit with wrench (TCAL81)	EDH-GEA-00309	408
TCALK291	primary	GEA	GE TCALK291 2-lug kit, TK4V load end	EDH-GEA-00320	408
TCALK2912 / TCALK2911	alias	GEA	GE TCALK291 2-lug kit, TK4V load end	EDH-GEA-00320	408
TCALK3121	primary	GEA	GE TCALK3121 3-lug kit with wrench (TCAL121)	EDH-GEA-00314	408
TCALK31214 / TCALK31212	alias	GEA	GE TCALK3121 3-lug kit with wrench (TCAL121)	EDH-GEA-00314	408
TCALK3122	primary	GEA	GE TCALK3122 3-lug kit (TCAL122)	EDH-GEA-00318	409
TCALK31225 / TCALK31223	alias	GEA	GE TCALK3122 3-lug kit (TCAL122)	EDH-GEA-00318	409
TCALK3124	primary	GEA	GE TCALK3124 3-lug kit with wrench (TCAL124)	EDH-GEA-00343	436
TCALK3125	primary	GEA	GE TCALK3125 3-lug kit with wrench (TCAL125)	EDH-GEA-00346	436
TCALK318	primary	GEA	GE TCALK318 3-lug kit, Spectra SE150	EDH-GEA-00336	426
TCALK324	primary	GEA	GE TCALK324 3-lug kit, F225	EDH-GEA-00289	400
TCALK325	primary	GEA	GE TCALK325 3-lug kit, TQD, (1) #4-300 kcmil Cu-Al	EDH-GEA-00282	439
TCALK329	primary	GEA	GE TCALK329 3-lug kit, Spectra SF250	EDH-GEA-00338	429
TCALK341	primary	GEA	GE TCALK341 3-lug kit, K1200/TB6 300-400A	EDH-GEA-00302	409
TCALK343	primary	GEA	GE TCALK343 3-lug kit, TLB4/THLC4	EDH-GEA-00300	403
TCALK347	primary	GEA	GE TCALK347 3-lug kit, J400/TJD 750 kcmil	EDH-GEA-00294	403
TCALK361	primary	GEA	GE TCALK361 3-lug kit with wrench, K1200/TB6	EDH-GEA-00306	409
TCALK363	primary	GEA	GE TCALK363 3-lug kit, J600 450-600A	EDH-GEA-00296	403
TCALK381	primary	GEA	GE TCALK381 3-lug kit with wrench (TCAL81)	EDH-GEA-00310	410
TCALK3812 / TCALK3811	alias	GEA	GE TCALK381 3-lug kit with wrench (TCAL81)	EDH-GEA-00310	410
TCALK391	primary	GEA	GE TCALK391 3-lug kit, TK4V load end	EDH-GEA-00321	410
TCALK3912 / TCALK3911	alias	GEA	GE TCALK391 3-lug kit, TK4V load end	EDH-GEA-00321	410
TCLK265	primary	GEA	GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00339	432
TCLK2652 / TCLK2651 (as printed)	alias	GEA	GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00339	432
TCLK365	primary	GEA	GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00340	432
TCLK3652 / TCLK3653 / TCLK3654 (as printed)	alias	GEA	GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00340	432
TCLK43	primary	GEA	GE TCLK43 lug, TLB4/THLC4	EDH-GEA-00299	405
TCO121	alias	GEA	GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A	EDH-GEA-00315	411
TCO124	primary	GEA	GE TCO124 plated copper lug, SK1200 (3) 350-750	EDH-GEA-00358	437
TCO125	primary	GEA	GE TCO125 plated copper lug, SK1200 (4) 250-500	EDH-GEA-00359	438
TCO18	alias	GEA	GE TC018 (TCO18) plated copper lug, SE150	EDH-GEA-00354	426
TCO29	primary	GEA	GE TCO29 plated copper lug, SF250	EDH-GEA-00355	430
TCO81A	alias	GEA	GE TC081A copper lug, K1200/TB8/SK1200 600-800A	EDH-GEA-00311	413
TCOK265	primary	GEA	GE TCOK265 2-pole copper lug kit, SG600	EDH-GEA-00356	433
TCOK365	primary	GEA	GE TCOK365 3-pole copper lug kit, SG600	EDH-GEA-00357	433
TED1DPK	primary	GEA	CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)	EDH-GEA-00256	327
TEDFP1	primary	GEA	A-Series filler plate for TQD/THQD/TED4/SE/FB	EDH-GEA-00040	309
TEDLS	primary	GEA	GE TEDLS line shield, TEB/TEC/TED/THED	EDH-GEA-00325	398
TEF1	primary	GEA	GE TEF1 back-connected line/load stud, E150 2-pole, TB1, THLC1, 2 25/32 in (shor	EDH-GEA-00386	399
TEF2	primary	GEA	GE TEF2 back-connected line/load stud, E150 2-pole, TB1, THLC1, 4 13/32 in (long	EDH-GEA-00387	399

Number	Type	Mfr	Description	Catalogue ID	Pg
TEF3	primary	GEA	GE TEF3 back-connected line/load stud, E150 2-pole, TB1, THLC1, 3 13/32 in (shor	EDH-GEA-00388	399
TEF4	primary	GEA	GE TEF4 back-connected line/load stud, E150 2-pole, TB1, THLC1, 5 25/32 in (long	EDH-GEA-00389	400
TEL1DPK	primary	GEA	CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)	EDH-GEA-00261	327
TF2DPK	primary	GEA	CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)	EDH-GEA-00257	327
TFK1	primary	GEA	GE TFK1 back-connected line/load stud, TFJ, TFK, THFK, 2 23/32 in (short)	EDH-GEA-00390	402
TFK2	primary	GEA	GE TFK2 back-connected line/load stud, TFJ, TFK, THFK, 5 31/32 in (long)	EDH-GEA-00391	402
TFKLS	primary	GEA	GE TFKLS line shield, TFJ/TFK/TFC	EDH-GEA-00326	402
TGL2	primary	GEA	A-Series Equipment ground, standard bonded to box, per 12 branch positions	EDH-GEA-00096	308
TGL20	primary	GEA	A-Series Main lug for equipment ground terminal kits	EDH-GEA-00095	308
TJ4DPK	primary	GEA	CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)	EDH-GEA-00259	327
TJ6DPK	primary	GEA	CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)	EDH-GEA-00260	328
TJKLS	primary	GEA	GE TJKLS line shield, TJJ/TJK/TJC	EDH-GEA-00327	406
TJLVK	primary	GEA	GE TJLVK line voltage control wire kit, J600	EDH-GEA-00334	406
TJLVK8 (as printed)	alias	GEA	GE TJLVK line voltage control wire kit, J600	EDH-GEA-00334	406
TK12SPK	primary	GEA	CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)	EDH-GEA-00264	328
TK8SPK	primary	GEA	CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)	EDH-GEA-00263	328
TKM11	primary	GEA	GE TKM11 back-connected line/load stud, K1200, TB6, TB8, 5 1/2 in	EDH-GEA-00394	419
TKM12	primary	GEA	GE TKM12 back-connected line/load stud, K1200, TB6, TB8, 8 in	EDH-GEA-00395	419
TKMC1	primary	GEA	GE TKMC1 connector (back strap), TKM	EDH-GEA-00332	417
TNKG3	primary	SIE	Siemens TNKG3 nut keeper plate (pkg of 3), NGG	EDH-SIE-00249	575
TQ2DPK	primary	GEA	CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)	EDH-GEA-00258	328
TQDFM1	primary	GEA	A-Series 2-3 pole TQD mechanical interlock	EDH-GEA-00088	311
TQLFP1	primary	GEA	A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY	EDH-GEA-00041	309
TSSG3A	primary	SIE	Siemens TSSG3A terminal shield, HGG/LGG/NGG 3-pole	EDH-SIE-00251	575
TVS12RMU	primary	SQD	Surgelogic TVSS remote monitor TVS12RMU	EDH-SQD-00098	249
UPC 782114795996	alias	EAT	PRL4 breaker connector kit, single-mount 4X, for DK, KD, KDB, HKD, KDC	EDH-EAT-00084	192
UPC 782114796412	alias	EAT	PRL4 breaker connector kit, twin-mount 4X, for DK, KD, KDB, HKD, KDC	EDH-EAT-00085	192
VCEL02114S1	primary	SQD	VERSA-CRIMP compression lug VCEL02114S1	EDH-SQD-00074	241
VCEL021-14S1	alias	SQD	VERSA-CRIMP compression lug VCEL02114S1	EDH-SQD-00074	241
VCEL030516H1	primary	SQD	VERSA-CRIMP compression lug VCEL030516H1	EDH-SQD-00071	241
VCEL030-516H1	alias	SQD	VERSA-CRIMP compression lug VCEL030516H1	EDH-SQD-00071	241
VCEL05012H1	primary	SQD	VERSA-CRIMP compression lug VCEL05012H1	EDH-SQD-00072	241
VCEL050-12H1	alias	SQD	VERSA-CRIMP compression lug VCEL05012H1	EDH-SQD-00072	241
VCEL06012H1	primary	SQD	VERSA-CRIMP compression lug VCEL06012H1	EDH-SQD-00079	242
VCEL060-12H1	alias	SQD	VERSA-CRIMP compression lug VCEL06012H1	EDH-SQD-00079	242
VCEL07512H1	primary	SQD	VERSA-CRIMP compression lug VCEL07512H1	EDH-SQD-00073	242
VCEL075-12H1	alias	SQD	VERSA-CRIMP compression lug VCEL07512H1	EDH-SQD-00073	242
VCELC02114S1	primary	SQD	VERSA-CRIMP compression lug VCELC02114S1	EDH-SQD-00075	242
VCELC021-14S1	alias	SQD	VERSA-CRIMP compression lug VCELC02114S1	EDH-SQD-00075	242
VCELC03038H1	primary	SQD	VERSA-CRIMP compression lug VCELC03038H1	EDH-SQD-00076	242
VCELC030-38H1	alias	SQD	VERSA-CRIMP compression lug VCELC03038H1	EDH-SQD-00076	242

Number	Type	Mfr	Description	Catalogue ID	Pg
VCELC05012H1	primary	SQD	VERSA-CRIMP compression lug VCELC05012H1	EDH-SQD-00077	243
VCELC050-12H1	alias	SQD	VERSA-CRIMP compression lug VCELC05012H1	EDH-SQD-00077	243
VCELC07512H1	primary	SQD	VERSA-CRIMP compression lug VCELC07512H1	EDH-SQD-00078	243
VCELC075-12H1	alias	SQD	VERSA-CRIMP compression lug VCELC07512H1	EDH-SQD-00078	243
Westinghouse DA breaker	supersedes	EAT	CDP breaker retrofit kit (Series C DK + connector kit) replacing Westinghouse DA	EDH-EAT-00024	32
Westinghouse EB, EHB breaker	supersedes	EAT	CDP breaker retrofit kit (Series C EHD + connector kit) replacing Westinghouse E	EDH-EAT-00016	33
Westinghouse FB breaker	supersedes	EAT	CDP breaker retrofit kit (Series C FDB + connector kit) replacing Westinghouse F	EDH-EAT-00017	35
Westinghouse HFB breaker	supersedes	EAT	CDP breaker retrofit kit (Series C FD + connector kit) replacing Westinghouse HF	EDH-EAT-00018	34
Westinghouse HKA breaker	supersedes	EAT	CDP breaker retrofit kit (Series C HKD + connector kit) replacing Westinghouse H	EDH-EAT-00020	36
Westinghouse JA breaker	supersedes	EAT	CDP breaker retrofit kit (Series C KDB + connector kit) replacing Westinghouse J	EDH-EAT-00022	40
Westinghouse JB breaker	supersedes	EAT	CDP breaker retrofit kit (Series C JDB + connector kit) replacing Westinghouse J	EDH-EAT-00023	38
Westinghouse KA breaker	supersedes	EAT	CDP breaker retrofit kit (Series C KD + connector kit) replacing Westinghouse KA	EDH-EAT-00019	39
Westinghouse KB, HKB breaker	supersedes	EAT	CDP breaker retrofit kit (Series C JD + connector kit) replacing Westinghouse KB	EDH-EAT-00021	37
Westinghouse LA, HLA breaker	supersedes	EAT	CDP breaker retrofit kit (Series C LD + connector kit) replacing Westinghouse LA	EDH-EAT-00025	41
Westinghouse MA, HMA breaker	supersedes	EAT	CDP breaker retrofit kit (Series C MDL + connector kit) replacing Westinghouse M	EDH-EAT-00026	42
Westinghouse NB, HNB breaker	supersedes	EAT	CDP breaker retrofit kit (Series C ND + connector kit) replacing Westinghouse NB	EDH-EAT-00027	43

9.4 Breaker compatibility index

Parts linked to each breaker family. The confidence shown is that of the part's breaker-compatibility claim.

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA41 (SIE)	BBKVA4P2P3	branch-connector-kit	P2, P3	A	453
3VA41 (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	526
3VA41 (SIE)	DFFPVA41A	filler-plate	RP1	—	528
3VA41 (SIE)	DFK1	deadfront	P2, P3	—	458
3VA41 (SIE)	DFP3AP01	filler-plate	P2, P3	—	459
3VA41 (SIE)	MBKVA41A	main-breaker-kit	RP1	A	504
3VA41 (SIE)	MBKVA41B	main-breaker-kit	RP1	A	505
3VA41 (SIE)	P1CONACPHAL	connector-strap	RP1	—	513
3VA41 (SIE)	P1CONACPHCU	connector-strap	RP1	B	513
3VA41 (SIE)	P1CONBPHAL	connector-strap	RP1	B	514
3VA41 (SIE)	P1CONBPHCU	connector-strap	RP1	B	514
3VA41 (SIE)	P1SCRWS	fastener	RP1, P1	—	531
3VA41 (SIE)	S3VA41T	branch-connector-kit	P4	A	467
3VA41 (SIE)	S3VA41TD	branch-connector-kit	P5, SB, CDP6	A	485
3VA41 (SIE)	S3VA41TDHD	branch-connector-kit	P5, SB, CDP6	A	485
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9233-0QA00	fastener	SB	—	552
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9243-0QA00	fastener	SB	—	552

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9473-0QA00	fastener	SB	—	552
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA5262P2HW	hardware-kit	P2, P3	A	460
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA5262P2S	branch-connector-kit	P2, P3	A	453
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA52P3HW	hardware-kit	P3	A	465
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA52P3T	branch-connector-kit	P3	A	463
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262A	filler-plate	RP1	—	528
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262P2A	filler-plate	P2, P3	—	459
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262P2B	filler-plate	P2, P3	—	459
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5363A	filler-plate	RP1, P2, P3	—	529
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5262A	main-breaker-kit	RP1	A	506
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5262B	main-breaker-kit	RP1	A	507
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5363A	main-breaker-kit	RP1	A	507
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5363JD	conversion-kit	RP1	—	531

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52PR	hardware-kit	P4, P5, SB	—	480
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52T	branch-connector-kit	P4	A	468
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52TD	branch-connector-kit	P5, SB, CDP6	A	486
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53PR	hardware-kit	SB	—	552
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53T	branch-connector-kit	P4	A	468
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53T2D	branch-connector-kit	SB	A	548
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53TD	branch-connector-kit	P5, SB, CDP6	A	486
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54T	branch-connector-kit	P4	A	469
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54T2D	branch-connector-kit	SB	A	548
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54TD	branch-connector-kit	P5, SB, CDP6	A	487
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA55TD	branch-connector-kit	SB	A	549
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA57TD	branch-connector-kit	SB	A	549
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA63T	branch-connector-kit	P4	A	469

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA63TD	branch-connector-kit	P5, SB, CDP6	A	487
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA64T	branch-connector-kit	P4	A	470
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA64TD	branch-connector-kit	P5, SB, CDP6	A	488
BAB (EAT)	1256C42G01	handle-lock	PRL1A, PRL3A	—	130
BAB (EAT)	1256C42G02	handle-lock	PRL1A, PRL3A	—	130
BAB (EAT)	1C96608	branch-connector-kit	PRL1A, PRL1X	A	115
BAB (EAT)	1C96619	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	124
BAB (EAT)	2C11642	branch-connector-kit	PRL1A, PRL1X	A	115
BAB (EAT)	4176B67	deadfront	PRL3A, PRL3X	—	160
BAB (EAT)	5155C62H01	filler-plate	PRL1A, PRL2A, PRL1X, PRL2X, PRL3A, PRL3X	—	127
BAB (EAT)	5156C10	deadfront	PRL1/PRL2	—	56
BAB (EAT)	KPRL1BAB	branch-connector-kit	PRL1/PRL2	C	52
BAB (EAT)	KPRL3ABA06	branch-connector-kit	PRL3A, PRC	A	148
BAB (EAT)	KPRL3ABA06-1	branch-connector-kit	PRL3A, PRC	A	149
BAB (EAT)	KPRL3ABA12	branch-connector-kit	PRL3A, PRC	A	149
BAB (EAT)	KPRL3ABA12-1	branch-connector-kit	PRL3A, PRC	A	150
BAB (EAT)	KPRL3ABA18	branch-connector-kit	PRL3A, PRC	A	150
BAB (EAT)	KPRL3ABA18-1	branch-connector-kit	PRL3A, PRC	A	151
BAB (EAT)	KPRL3ABA24	branch-connector-kit	PRL3A, PRC	A	151
BAB (EAT)	KPRL3ABA24-1	branch-connector-kit	PRL3A, PRC	A	152
BAB (EAT)	KPRL3XBA06	branch-connector-kit	PRL3X	A	171
BAB (EAT)	KPRL3XBA06-1	branch-connector-kit	PRL3X	A	172
BAB (EAT)	KPRL3XBA12	branch-connector-kit	PRL3X	A	172
BAB (EAT)	KPRL3XBA12-1	branch-connector-kit	PRL3X	A	172
BAB (EAT)	KPRL3XBA18	branch-connector-kit	PRL3X	A	173
BAB (EAT)	KPRL3XBA18-1	branch-connector-kit	PRL3X	A	173
BAB (EAT)	KPRL3XBA24	branch-connector-kit	PRL3X	A	173
BAB (EAT)	KPRL3XBA24-1	branch-connector-kit	PRL3X	A	174
BL (SIE)	6BL2C	branch-connector-kit	CDP6, SB	A	536
BL (SIE)	BBKB32	branch-connector-kit	P2, P3	A	450
BL (SIE)	BQFS2	barrier		A	554
BL (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	526
BL (SIE)	DFFPED01	filler-plate	P1, RP1	—	449
BL (SIE)	DFFPVA41A	filler-plate	RP1	—	528
BL (SIE)	DFK1	deadfront	P2, P3	—	458
BL (SIE)	DFP3AP01	filler-plate	P2, P3	—	459
BL (SIE)	MBKBFA	hardware-kit	RP1	—	531
BL (SIE)	MBKBL1	main-breaker-kit	P1, S1/S2	A	441
BL (SIE)	MBKBL3	main-breaker-kit	P1, S1/S2	A	442
BL (SIE)	MBKVA41A	main-breaker-kit	RP1	A	504
BL (SIE)	MBKVA41B	main-breaker-kit	RP1	A	505
BL (SIE)	P1CONACPHAL	connector-strap	RP1	—	513
BL (SIE)	P1CONACPHCU	connector-strap	RP1	B	513

Breaker family	Part	Component	Equipment family	Cl.	Pg
BL (SIE)	P1CONBPHAL	connector-strap	RP1	B	514
BL (SIE)	P1CONBPHCU	connector-strap	RP1	B	514
BL (SIE)	P1SCRWS	fastener	RP1, P1	—	531
BL (SIE)	QF3	filler-plate	CDP6, SB, P1, P2, P3	—	547
BL (SIE)	SBL	branch-connector-kit	P4	A	470
BL (SIE)	SBLBD	branch-connector-kit	P5, SB, CDP6	A	488
BL (SIE)	TA1Q1	lug		A	553
BL (SIE)	TC1Q1	lug		A	553
BQ / BQH / HBQ (bolt-on, legacy) (SIE)	6BL2C	branch-connector-kit	CDP6, SB	A	536
BQ / BQH / HBQ (bolt-on, legacy) (SIE)	QF3	filler-plate	CDP6, SB, P1, P2, P3	—	547
BQD (SIE)	BBKB32	branch-connector-kit	P2, P3	A	450
BQD (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	526
BQD (SIE)	DFFPED01	filler-plate	P1, RP1	—	449
BQD (SIE)	DFFPVA41A	filler-plate	RP1	—	528
BQD (SIE)	DFK1	deadfront	P2, P3	—	458
BQD (SIE)	DFP3AP01	filler-plate	P2, P3	—	459
BQD (SIE)	MBKBC3	main-breaker-kit	P1, S1/S2	A	441
BQD (SIE)	MBKBFA	hardware-kit	RP1	—	531
BQD (SIE)	MBKVA41A	main-breaker-kit	RP1	A	504
BQD (SIE)	MBKVA41B	main-breaker-kit	RP1	A	505
BQD (SIE)	P1CONACPHAL	connector-strap	RP1	—	513
BQD (SIE)	P1CONACPHCU	connector-strap	RP1	B	513
BQD (SIE)	P1CONBPHAL	connector-strap	RP1	B	514
BQD (SIE)	P1CONBPHCU	connector-strap	RP1	B	514
BQD (SIE)	P1SCRWS	fastener	RP1, P1	—	531
BQD (SIE)	SBL	branch-connector-kit	P4	A	470
BQD (SIE)	SBLBD	branch-connector-kit	P5, SB, CDP6	A	488
BR (EAT)	3BRS225	sub-feed-lug-kit	BR	—	16
BR (EAT)	3BRSF150	sub-feed-lug-kit	BR	—	16
BR (EAT)	BHT	handle-lock	BR	—	18
BR (EAT)	BINA	neutral-assembly	BR	—	17
BR (EAT)	BRFP	filler-plate	BR	—	18
BR (EAT)	BRL200	main-lug-kit	BR	—	16
BR (EAT)	BRLW	padlock-attachment	BR	—	18
BR (EAT)	BRLW1	padlock-attachment	BR	—	19
BR (EAT)	BRS225	sub-feed-lug-kit	BR	—	16
BR (EAT)	BRSF125	sub-feed-lug-kit	BR	—	17
BR (EAT)	BRSF150	sub-feed-lug-kit	BR	—	17
BR (EAT)	BWFP	filler-plate	BR	—	18
BR (EAT)	NL300	lug	BR	—	17
CA (EAT)	4176B66	deadfront	PRL3A	—	160
CA (EAT)	4176B80	deadfront	PRL3A	—	161
CA (EAT)	6555C40H01	filler-plate	PRL3A	—	167
CA (EAT)	6555C41H01	filler-plate	PRL3A	—	167
CA (EAT)	KCDPCA	branch-connector-kit	CDP	A	20
CA (EAT)	KPRL3CA	branch-connector-kit	PRL3, WEB	A	145
CA (EAT)	KPRL4CA	branch-connector-kit	PRL4, PRL4X	A	183
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	4176B56	deadfront	PRL3A	—	159
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	4176B70	deadfront	PRL3A	—	161

Breaker family	Part	Component	Equipment family	Cl.	Pg
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KCDPFBP	branch-connector-kit	CDP	A	22
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KCDPLCL	branch-connector-kit	CDP	A	25
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KPRL4FBP	branch-connector-kit	PRL4, PRL4X	A	187
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KPRL4FDCL	branch-connector-kit	PRL4, PRL4X	A	190
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KPRL4LCL	branch-connector-kit	PRL4, PRL4X	A	194
DA (EAT)	KCDPDK	conversion-kit	CDP	A	32
DA (EAT)	KCDPLB	branch-connector-kit	CDP	A	25
E150 line (TEB, TED, THED, TEC) (GEA)	TC012	lug		A	396
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL12	lug		A	397
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL12A	lug		A	397
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL14	lug		A	397
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL15	lug		A	398
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL19PD1	lug		A	427
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL19PD3	lug-kit		A	425
E150 line (TEB, TED, THED, TEC) (GEA)	TEDLS	barrier		A	398
E150 line (TEB, TED, THED, TEC) (GEA)	TEF1	breaker-accessory		A	399
E150 line (TEB, TED, THED, TEC) (GEA)	TEF2	breaker-accessory		A	399
E150 line (TEB, TED, THED, TEC) (GEA)	TEF3	breaker-accessory		A	399
E150 line (TEB, TED, THED, TEC) (GEA)	TEF4	breaker-accessory		A	400
EB (EAT)	KCDPCA	branch-connector-kit	CDP	A	20
EB (EAT)	KCDPDK	conversion-kit	CDP	A	32
EB (EAT)	KCDPED225	branch-connector-kit	CDP	A	21
EB (EAT)	KCDPEHD	conversion-kit	CDP	A	33
EB (EAT)	KCDPFB100	branch-connector-kit	CDP	A	21
EB (EAT)	KCDPFBP	branch-connector-kit	CDP	A	22
EB (EAT)	KCDPFD	conversion-kit	CDP	A	34
EB (EAT)	KCDPFDB	conversion-kit	CDP	A	35
EB (EAT)	KCDPHKD	conversion-kit	CDP	A	36
EB (EAT)	KCDPJD	conversion-kit	CDP	A	37
EB (EAT)	KCDPJDB	conversion-kit	CDP	A	38
EB (EAT)	KCDPKB	branch-connector-kit	CDP	A	23
EB (EAT)	KCDPKD	conversion-kit	CDP	A	39
EB (EAT)	KCDPKDB	conversion-kit	CDP	A	40
EB (EAT)	KCDPLA400	branch-connector-kit	CDP	A	23
EB (EAT)	KCDPLA600	branch-connector-kit	CDP	A	24
EB (EAT)	KCDPLB	branch-connector-kit	CDP	A	25
EB (EAT)	KCDPLCL	branch-connector-kit	CDP	A	25
EB (EAT)	KCDPLD	conversion-kit	CDP	A	41
EB (EAT)	KCDPMC	branch-connector-kit	CDP	A	26
EB (EAT)	KCDPMDL	conversion-kit	CDP	A	42

Breaker family	Part	Component	Equipment family	Cl.	Pg
EB (EAT)	KCDPNBP	branch-connector-kit	CDP	A	27
EB (EAT)	KCDPNC	branch-connector-kit	CDP	A	27
EB (EAT)	KCDPND	conversion-kit	CDP	A	43
EB (EAT)	TAD3	conversion-kit	CDP, PRL4	A	43
ED (EAT)	4176B68	deadfront	PRL3A	—	160
ED (EAT)	4178B08	deadfront	PRL3A	—	162
ED (EAT)	4179B39	deadfront	PRL3A	—	162
ED (EAT)	4179B40	deadfront	PRL3A	—	162
ED (EAT)	4179B41	deadfront	PRL3A	—	162
ED (EAT)	4179B42	deadfront	PRL3A	—	163
ED (EAT)	4180B61	deadfront	PRL1A, PRL2A	—	125
ED (EAT)	4180B93	deadfront	PRL3A	—	163
ED (EAT)	42C8073	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	126
ED (EAT)	42C8076	deadfront	PRL3A, PRL3X	—	164
ED (EAT)	42C8077	deadfront	PRL3A, PRL3X	—	164
ED (EAT)	42C8081	deadfront	PRL3A, PRL3X	—	165
ED (EAT)	42C8082	deadfront	PRL3A, PRL3X	—	166
ED (EAT)	KB21AFB	main-breaker-kit	PRL1A, PRL2A	A	64
ED (EAT)	KB21AFT	main-breaker-kit	PRL1A, PRL2A	A	64
ED (EAT)	KB21SFB	main-breaker-kit	PRL1A, PRL2A	A	65
ED (EAT)	KB21SFT	main-breaker-kit	PRL1A, PRL2A	A	65
ED (EAT)	KB23AFB	main-breaker-kit	PRL1A, PRL2A	A	66
ED (EAT)	KB23AFT	main-breaker-kit	PRL1A, PRL2A	A	66
ED (EAT)	KB23SFB	main-breaker-kit	PRL1A, PRL2A	A	67
ED (EAT)	KB23SFT	main-breaker-kit	PRL1A, PRL2A	A	67
ED (EAT)	KCDPED225	branch-connector-kit	CDP	A	21
ED (EAT)	KPRL3AED2	branch-connector-kit	PRL3A	A	152
ED (EAT)	KPRL3AED3	branch-connector-kit	PRL3A	A	152
ED (EAT)	KPRL3ED	branch-connector-kit	PRL3, WEB	A	146
ED (EAT)	KPRL4ED	branch-connector-kit	PRL4	A	185
ED (EAT)	KPRL4ED2	branch-connector-kit	PRL4	A	186
ED (EAT)	KPRL4X22	branch-connector-kit	PRL4, PRL4X	A	202
ED (EAT)	KPRL4X32	branch-connector-kit	PRL4, PRL4X	A	203
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	6CLE2	branch-connector-kit	P5, SB, CDP6	A	482
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	6E62	branch-connector-kit	CDP6, SB	A	540
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	BBKED32	branch-connector-kit	P2, P3	A	451
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	CCE125	lug		A	554
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	526
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFPED01	filler-plate	P1, RP1	—	449
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFPVA41A	filler-plate	RP1	—	528
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFK1	deadfront	P2, P3	—	458

Breaker family	Part	Component	Equipment family	Cl.	Pg
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFP3AP01	filler-plate	P2, P3	—	459
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	LD1E060	lug		A	555
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	LD1E100	lug		A	555
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	LN1E100	lug		A	555
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED1	main-breaker-kit	P1, S1/S2	A	442
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED1A	main-breaker-kit	RP1	A	500
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED3	main-breaker-kit	P1, S1/S2	A	442
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED3A	main-breaker-kit	RP1	A	500
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	QF3	filler-plate	CDP6, SB, P1, P2, P3	—	547
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	RS2641	breaker-accessory		A	557
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	RS2642	breaker-accessory		A	557
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	RS2643	breaker-accessory		A	558
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	RS2644	breaker-accessory		A	558
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SA1E025	lug		A	556
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SCE	branch-connector-kit	P4	A	471
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SCED	branch-connector-kit	SB	A	550
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SE6	branch-connector-kit	P4	A	473
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SE6D	branch-connector-kit	P5, SB, CDP6	A	490
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SMBKED1	main-breaker-kit	S1/S2, SE	A	532
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SMBKED3	main-breaker-kit	S1/S2, SE	A	533
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	TA1E6125	lug		A	556

Breaker family	Part	Component	Equipment family	Cl.	Pg
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	TA6ED06	lug		A	556
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	TC1ED6150	lug		A	556
EHB (EAT)	KCDPEHD	conversion-kit	CDP	A	33
EHB (EAT)	KCDPFB100	branch-connector-kit	CDP	A	21
EHD (EAT)	4176B68	deadfront	PRL3A	—	160
EHD (EAT)	4178B06H01	filler-plate	PRL3A	—	167
EHD (EAT)	4178B08	deadfront	PRL3A	—	162
EHD (EAT)	4179B39	deadfront	PRL3A	—	162
EHD (EAT)	4179B40	deadfront	PRL3A	—	162
EHD (EAT)	4179B41	deadfront	PRL3A	—	162
EHD (EAT)	4179B42	deadfront	PRL3A	—	163
EHD (EAT)	4180B03	deadfront	PRL1A, PRL2A	—	125
EHD (EAT)	4180B52H01	filler-plate	PRL1A, PRL2A	—	127
EHD (EAT)	4180B61	deadfront	PRL1A, PRL2A	—	125
EHD (EAT)	4180B93	deadfront	PRL3A	—	163
EHD (EAT)	42C8072	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	126
EHD (EAT)	42C8073	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	126
EHD (EAT)	42C8076	deadfront	PRL3A, PRL3X	—	164
EHD (EAT)	42C8077	deadfront	PRL3A, PRL3X	—	164
EHD (EAT)	42C8078	deadfront	PRL3A, PRL3X	—	164
EHD (EAT)	42C8079	deadfront	PRL3A, PRL3X	—	165
EHD (EAT)	42C8080	deadfront	PRL3A, PRL3X	—	165
EHD (EAT)	42C8081	deadfront	PRL3A, PRL3X	—	165
EHD (EAT)	42C8082	deadfront	PRL3A, PRL3X	—	166
EHD (EAT)	42C8083H01	filler-plate	PRL3A, PRL3X	—	167
EHD (EAT)	KB11AFB	main-breaker-kit	PRL1A, PRL2A	A	60
EHD (EAT)	KB11AFT	main-breaker-kit	PRL1A, PRL2A	A	60
EHD (EAT)	KB11SFB	main-breaker-kit	PRL1A, PRL2A	A	61
EHD (EAT)	KB11SFT	main-breaker-kit	PRL1A, PRL2A	A	61
EHD (EAT)	KB13AFB	main-breaker-kit	PRL1A, PRL2A	A	62
EHD (EAT)	KB13AFT	main-breaker-kit	PRL1A, PRL2A	A	62
EHD (EAT)	KB13SFB	main-breaker-kit	PRL1A, PRL2A	A	63
EHD (EAT)	KB13SFT	main-breaker-kit	PRL1A, PRL2A	A	63
EHD (EAT)	KB21AFB	main-breaker-kit	PRL1A, PRL2A	A	64
EHD (EAT)	KB21AFT	main-breaker-kit	PRL1A, PRL2A	A	64
EHD (EAT)	KB21SFB	main-breaker-kit	PRL1A, PRL2A	A	65
EHD (EAT)	KB21SFT	main-breaker-kit	PRL1A, PRL2A	A	65
EHD (EAT)	KB23AFB	main-breaker-kit	PRL1A, PRL2A	A	66
EHD (EAT)	KB23AFT	main-breaker-kit	PRL1A, PRL2A	A	66
EHD (EAT)	KB23SFB	main-breaker-kit	PRL1A, PRL2A	A	67
EHD (EAT)	KB23SFT	main-breaker-kit	PRL1A, PRL2A	A	67
EHD (EAT)	KCDPED225	branch-connector-kit	CDP	A	21
EHD (EAT)	KCDPEHD	conversion-kit	CDP	A	33
EHD (EAT)	KCDPFB100	branch-connector-kit	CDP	A	21
EHD (EAT)	KCDPFB100-H	hardware-kit	CDP	—	31
EHD (EAT)	KCDPFD	conversion-kit	CDP	A	34
EHD (EAT)	KCDPFDB	conversion-kit	CDP	A	35
EHD (EAT)	KPRL3AED2	branch-connector-kit	PRL3A	A	152
EHD (EAT)	KPRL3AED3	branch-connector-kit	PRL3A	A	152

Breaker family	Part	Component	Equipment family	Cl.	Pg
EHD (EAT)	KPRL3AFD1	branch-connector-kit	PRL3A	A	153
EHD (EAT)	KPRL3AFD2	branch-connector-kit	PRL3A	A	153
EHD (EAT)	KPRL3AFD3	branch-connector-kit	PRL3A	A	153
EHD (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	A	146
EHD (EAT)	KPRL4FBP	branch-connector-kit	PRL4, PRL4X	A	187
EHD (EAT)	KPRL4FD	branch-connector-kit	PRL4	A	187
EHD (EAT)	KPRL4FD1	branch-connector-kit	PRL4	A	188
EHD (EAT)	KPRL4FD2	branch-connector-kit	PRL4	A	189
EHD (EAT)	KPRL4FDCL	branch-connector-kit	PRL4, PRL4X	A	190
EHD (EAT)	KPRL4X12	branch-connector-kit	PRL4, PRL4X	A	201
EHD (EAT)	KPRL4X22	branch-connector-kit	PRL4, PRL4X	A	202
EHD (EAT)	KPRL4X32	branch-connector-kit	PRL4, PRL4X	A	203
EHD (EAT)	PRLSEBFD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X	A	122
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TC024	lug		A	401
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TCAL24	lug		A	401
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TCAL27	lug		A	401
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TCALK324	lug-kit		A	400
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFK1	breaker-accessory		A	402
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFK2	breaker-accessory		A	402
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFKLS	barrier		A	402
FA / FH (I-Line) (SQD)	2152620361	fastener	I-LINE, QED-2	A	234
FB (EAT)	KCDPFB100	branch-connector-kit	CDP	A	21
FB (EAT)	KCDPFDB	conversion-kit	CDP	A	35
FD (EAT)	KCDPED225	branch-connector-kit	CDP	A	21
FD (EAT)	KCDPFB100	branch-connector-kit	CDP	A	21
FD (EAT)	KCDPFB100-H	hardware-kit	CDP	—	31
FD (EAT)	KCDPFD	conversion-kit	CDP	A	34
FD (EAT)	KCDPFDB	conversion-kit	CDP	A	35
FD (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	A	146
FD (EAT)	KPRL4FBP	branch-connector-kit	PRL4, PRL4X	A	187
FD (EAT)	KPRL4FD	branch-connector-kit	PRL4	A	187
FD (EAT)	KPRL4FD1	branch-connector-kit	PRL4	A	188
FD (EAT)	KPRL4FD2	branch-connector-kit	PRL4	A	189
FD (EAT)	KPRL4FDCL	branch-connector-kit	PRL4, PRL4X	A	190
FD (EAT)	KPRL4X12	branch-connector-kit	PRL4, PRL4X	A	201
FD (EAT)	KPRL4X22	branch-connector-kit	PRL4, PRL4X	A	202
FD (EAT)	KPRL4X32	branch-connector-kit	PRL4, PRL4X	A	203
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	6CLF1	branch-connector-kit	CDP6, SB	A	537
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	6F62	branch-connector-kit	CDP6, SB	A	540
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	CCF250	lug		A	559
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	DFFPFD01	filler-plate	RP1, P1, S1/S2, SE, P2, P3	—	526

Breaker family	Part	Component	Equipment family	Cl.	Pg
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD1	main-breaker-kit	P1, S1/S2	A	443
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD1A	main-breaker-kit	RP1	A	501
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD3	main-breaker-kit	P1, S1/S2	A	443
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD3A	main-breaker-kit	RP1	A	501
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	RS4755	breaker-accessory		A	560
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	RS4756	breaker-accessory		A	560
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SCF	branch-connector-kit	P4	A	471
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SCFD	branch-connector-kit	P5, SB, CDP6	A	489
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SF6	branch-connector-kit	P4	A	473
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SF6D	branch-connector-kit	P5, SB, CDP6	A	491
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SMBKFD1	main-breaker-kit	S1/S2, SE	A	533
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SMBKFD3	main-breaker-kit	S1/S2, SE	A	533
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	TA1FD350A	lug		A	559
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	TA6FD04	lug		A	559
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	TC1FD350	lug		A	559
GB (EAT)	1C96609	branch-connector-kit	PRL2A, PRL2X	A	144
GB (EAT)	1C96620	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	124
GB (EAT)	4176B69	deadfront	PRL3A, PRL3X	—	161
GB (EAT)	5155C62H01	filler-plate	PRL1A, PRL2A, PRL1X, PRL2X, PRL3A, PRL3X	—	127
GB (EAT)	5156C09	deadfront	PRL1/PRL2	—	55
GB (EAT)	KPRL2GHB	branch-connector-kit	PRL1/PRL2	C	53
GB (EAT)	KPRL3AGB06	branch-connector-kit	PRL3A, PRC	A	154
GB (EAT)	KPRL3AGB06-1	branch-connector-kit	PRL3A, PRC	A	154
GB (EAT)	KPRL3AGB12	branch-connector-kit	PRL3A, PRC	A	155
GB (EAT)	KPRL3AGB12-1	branch-connector-kit	PRL3A, PRC	A	155
GB (EAT)	KPRL3AGB18	branch-connector-kit	PRL3A, PRC	A	156
GB (EAT)	KPRL3AGB18-1	branch-connector-kit	PRL3A, PRC	A	156
GB (EAT)	KPRL3AGB24	branch-connector-kit	PRL3A, PRC	A	157
GB (EAT)	KPRL3AGB24-1	branch-connector-kit	PRL3A, PRC	A	157
GB (EAT)	KPRL3XGB06	branch-connector-kit	PRL3X	A	174

Breaker family	Part	Component	Equipment family	Cl.	Pg
GB (EAT)	KPRL3XGB06-1	branch-connector-kit	PRL3X	A	174
GB (EAT)	KPRL3XGB12	branch-connector-kit	PRL3X	A	175
GB (EAT)	KPRL3XGB12-1	branch-connector-kit	PRL3X	A	175
GB (EAT)	KPRL3XGB18	branch-connector-kit	PRL3X	A	175
GB (EAT)	KPRL3XGB18-1	branch-connector-kit	PRL3X	A	176
GB (EAT)	KPRL3XGB24	branch-connector-kit	PRL3X	A	176
GB (EAT)	KPRL3XGB24-1	branch-connector-kit	PRL3X	A	176
GB (EAT)	PRLSEBGHB	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	A	123
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKGB32	branch-connector-kit	P2, P3	A	451
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKNB32	branch-connector-kit	P2, P3	A	452
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKVA4P2P3	branch-connector-kit	P2, P3	A	453
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	526
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFPED01	filler-plate	P1, RP1	—	449
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFPVA41A	filler-plate	RP1	—	528
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFK1	deadfront	P2, P3	—	458
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFP3AP01	filler-plate	P2, P3	—	459
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKBFA	hardware-kit	RP1	—	531
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKNB1	main-breaker-kit	P1, S1/S2	A	444
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKNB3	main-breaker-kit	P1, S1/S2	A	444
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKVA41A	main-breaker-kit	RP1	A	504
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKVA41B	main-breaker-kit	RP1	A	505
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONACPHAL	connector-strap	RP1	—	513
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONACPHCU	connector-strap	RP1	B	513
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONBPHAL	connector-strap	RP1	B	514
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONBPHCU	connector-strap	RP1	B	514
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1SCRWS	fastener	RP1, P1	—	531

Breaker family	Part	Component	Equipment family	Cl.	Pg
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41T	branch-connector-kit	P4	A	467
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41TD	branch-connector-kit	P5, SB, CDP6	A	485
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41TDHD	branch-connector-kit	P5, SB, CDP6	A	485
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	SGB2	branch-connector-kit	P4	A	474
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	SGB2D	branch-connector-kit	P5, SB, CDP6	A	492
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	21590-20241	fastener	I-LINE, QED-2	A	234
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	AL150HD	lug-kit	QMB, QED-2, I-LINE	A	236
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	CU150HD	lug-kit	QMB, QED-2, I-LINE	A	237
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	HLN4EBL	filler-plate	I-LINE, QED-2	A	231
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	HLW4EBL	filler-plate	I-LINE, QED-2	A	232
HFB (EAT)	KCDPFB100	branch-connector-kit	CDP	A	21
HFB (EAT)	KCDPFD	conversion-kit	CDP	A	34
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	21590-20241	fastener	I-LINE, QED-2	A	234
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	AL175JD	lug-kit	QMB, QED-2, I-LINE	A	236
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	AL250JD	lug-kit	QMB, QED-2, I-LINE	A	237
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	CU250JD	lug-kit	QMB, QED-2, I-LINE	A	237
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	HLN4EBL	filler-plate	I-LINE, QED-2	A	231
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	HLW4EBL	filler-plate	I-LINE, QED-2	A	232
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TC043	lug		A	404
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TC063	lug		A	404
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCAL43	lug		A	404
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCAL47	lug		A	405
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCAL63	lug		A	405
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCALK343	lug-kit		A	403
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCALK347	lug-kit		A	403
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCALK363	lug-kit		A	403
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCLK43	lug		A	405
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJKLS	barrier		A	406
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJLVK	breaker-accessory		A	406

Breaker family	Part	Component	Equipment family	Cl.	Pg
JA (EAT)	KCDPKDB	conversion-kit	CDP	A	40
JA (EAT)	TAD3	conversion-kit	CDP, PRL4	A	43
JB (EAT)	KCDPJDB	conversion-kit	CDP	A	38
JB (EAT)	KCDPKB	branch-connector-kit	CDP	A	23
JD (EAT)	4176B60	deadfront	PRL3A	—	159
JD (EAT)	4176B79	deadfront	PRL3A	—	161
JD (EAT)	4180B04	deadfront	PRL1A, PRL2A	—	125
JD (EAT)	4180B52H01	filler-plate	PRL1A, PRL2A	—	127
JD (EAT)	KB41AJB	main-breaker-kit	PRL1A, PRL2A	A	68
JD (EAT)	KB41AJT	main-breaker-kit	PRL1A, PRL2A	A	68
JD (EAT)	KB41SJB	main-breaker-kit	PRL1A, PRL2A	A	70
JD (EAT)	KB41SJT	main-breaker-kit	PRL1A, PRL2A	A	70
JD (EAT)	KB43AJB	main-breaker-kit	PRL1A, PRL2A	A	72
JD (EAT)	KB43AJT	main-breaker-kit	PRL1A, PRL2A	A	72
JD (EAT)	KB43SJB	main-breaker-kit	PRL1A, PRL2A	A	74
JD (EAT)	KB43SJT	main-breaker-kit	PRL1A, PRL2A	A	74
JD (EAT)	KCDPJD	conversion-kit	CDP	A	37
JD (EAT)	KCDPJDB	conversion-kit	CDP	A	38
JD (EAT)	KCDPKB	branch-connector-kit	CDP	A	23
JD (EAT)	KPRL4JDS	branch-connector-kit	PRL4, PRL4X	A	190
JD (EAT)	KPRL4JDT	branch-connector-kit	PRL4, PRL4X	A	191
JD (EAT)	PRLSEBJD	barrier	PRL1A, PRL2A, PRL3A	A	123
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6CLJ1	branch-connector-kit	CDP6, SB	A	538
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6JJ61	branch-connector-kit	CDP6, SB	A	541
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6JJ62	branch-connector-kit	CDP6, SB	A	541
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SCJ1	branch-connector-kit	CDP6, SB	A	544
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SCL61C	branch-connector-kit	CDP6, SB	A	545
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SJL1	branch-connector-kit	CDP6, SB	A	546
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	CCL600	lug		A	561
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	CLRSJL3	barrier		A	563
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	DFFPJD01	filler-plate	RP1, P1, S1/S2, P2, P3	—	527
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	DFFPJD02	filler-plate	RP1	—	527
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	JDTERMSHIELD	barrier		A	563
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD1	main-breaker-kit	P1	A	443

Breaker family	Part	Component	Equipment family	Cl.	Pg
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD3	main-breaker-kit	P1	A	444
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD3B	main-breaker-kit	RP1	B	502
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKVA5363JD	conversion-kit	RP1	—	531
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	RS5773	breaker-accessory		A	564
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	RS5774	breaker-accessory		A	564
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SCJ	branch-connector-kit	P4	A	471
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SCJD	branch-connector-kit	P5, SB, CDP6	A	489
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ1	branch-connector-kit	P4	A	474
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ1D	branch-connector-kit	P5, SB, CDP6	A	492
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ2D	branch-connector-kit	P5, SB, CDP6	A	493
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SMBKJD1	main-breaker-kit	S1/S2, SE	A	534
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SMBKJD3	main-breaker-kit	S1/S2, SE	A	534
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSCJ	branch-connector-kit	P4	A	476
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSCJD	branch-connector-kit	SB	A	551
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSJ1	branch-connector-kit	P4	A	477
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSJ1D	branch-connector-kit	SB	A	551
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	TA1L6750	lug		A	561
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	TA2J630	lug		A	561
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	TA2J6500	lug		A	562
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	TA6JD20	lug		A	562
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	TC1J6600	lug		A	562

Breaker family	Part	Component	Equipment family	Cl.	Pg
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	TC2J6500	lug		A	563
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	286A8066G1	breaker-accessory		A	417
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	789A448G1	breaker-accessory		A	417
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	789A448G2	breaker-accessory		A	418
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	789A448G3	breaker-accessory		C	418
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	SKLVK	breaker-accessory		A	418
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC0121	lug		A	411
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC0131	lug		A	411
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC041	lug		A	412
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC061	lug		A	412
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC081A	lug		A	413
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC091	lug		A	413
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL121	lug		A	414
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL122	lug		B	414
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL131	lug		B	415
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL41	lug		A	415
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL61	lug		A	415
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL81	lug		A	416
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL91	lug		B	416
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK2121	lug-kit		B	407
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK2122	lug-kit		B	407

Breaker family	Part	Component	Equipment family	Cl.	Pg
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK261	lug-kit		A	407
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK281	lug-kit		A	408
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK291	lug-kit		B	408
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK3121	lug-kit		B	408
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK3122	lug-kit		B	409
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK341	lug-kit		A	409
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK361	lug-kit		A	409
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK381	lug-kit		A	410
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK391	lug-kit		B	410
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKM11	breaker-accessory		A	419
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKM12	breaker-accessory		A	419
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKMC1	connector-strap		A	417
KA (EAT)	KCDPHKD	conversion-kit	CDP	A	36
KA (EAT)	KCDPKD	conversion-kit	CDP	A	39
KA (EAT)	KCDPLB	branch-connector-kit	CDP	A	25
KB (EAT)	KCDPJD	conversion-kit	CDP	A	37
KB (EAT)	KCDPKB	branch-connector-kit	CDP	A	23
KD (EAT)	4176B61	deadfront	PRL3A	—	160
KD (EAT)	4180B05	deadfront	PRL1A, PRL2A	—	125
KD (EAT)	4180B52H01	filler-plate	PRL1A, PRL2A	—	127
KD (EAT)	42C7982	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	126
KD (EAT)	KB41AKB	main-breaker-kit	PRL1A, PRL2A	A	69
KD (EAT)	KB41AKT	main-breaker-kit	PRL1A, PRL2A	A	69
KD (EAT)	KB41SKB	main-breaker-kit	PRL1A, PRL2A	A	71
KD (EAT)	KB41SKT	main-breaker-kit	PRL1A, PRL2A	A	71
KD (EAT)	KB43AKB	main-breaker-kit	PRL1A, PRL2A	A	73
KD (EAT)	KB43AKT	main-breaker-kit	PRL1A, PRL2A	A	73
KD (EAT)	KB43SKB	main-breaker-kit	PRL1A, PRL2A	A	75
KD (EAT)	KB43SKT	main-breaker-kit	PRL1A, PRL2A	A	75
KD (EAT)	KCDPDK	conversion-kit	CDP	A	32
KD (EAT)	KCDPHKD	conversion-kit	CDP	A	36
KD (EAT)	KCDPKD	conversion-kit	CDP	A	39
KD (EAT)	KCDPKDB	conversion-kit	CDP	A	40
KD (EAT)	KCDPLB	branch-connector-kit	CDP	A	25
KD (EAT)	KPRL4CKD	branch-connector-kit	PRL4, PRL4X	A	184

Breaker family	Part	Component	Equipment family	Cl.	Pg
KD (EAT)	KPRL4KDS	branch-connector-kit	PRL4, PRL4X	A	192
KD (EAT)	KPRL4KDT	branch-connector-kit	PRL4, PRL4X	A	192
KD (EAT)	PRLSEBLGKD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X	A	123
KD (EAT)	TAD3	conversion-kit	CDP, PRL4	A	43
LA (EAT)	KCDPLA600	branch-connector-kit	CDP	A	24
LA (EAT)	KCDPLD	conversion-kit	CDP	A	41
LA (EAT)	KPRL4LC	branch-connector-kit	PRL4, PRL4X	A	194
LA / LH (I-Line) (SQD)	AL400LA	lug-kit	QMB, QED-2, I-LINE	A	237
LA / LH (I-Line) (SQD)	CU400LA	lug-kit	QMB, QED-2, I-LINE	A	238
LA / LH (I-Line) (SQD)	QMB3300LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	283
LA / LH (I-Line) (SQD)	QMB3400LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	283
LB (EAT)	KCDPKD	conversion-kit	CDP	A	39
LB (EAT)	KCDPKDB	conversion-kit	CDP	A	40
LB (EAT)	KCDPLB	branch-connector-kit	CDP	A	25
LB (EAT)	TAD3	conversion-kit	CDP, PRL4	A	43
LC (EAT)	4176B51	deadfront	PRL3A	—	159
LC (EAT)	KCDPLA600	branch-connector-kit	CDP	A	24
LC (EAT)	KCDPLD	conversion-kit	CDP	A	41
LC (EAT)	KPRL4LC	branch-connector-kit	PRL4, PRL4X	A	194
LC (EAT)	KPRL4LD	branch-connector-kit	PRL4	A	195
LD (EAT)	KCDPLA600	branch-connector-kit	CDP	A	24
LD (EAT)	KCDPLD	conversion-kit	CDP	A	41
LD (EAT)	KPRL4LC	branch-connector-kit	PRL4, PRL4X	A	194
LD (EAT)	KPRL4LD	branch-connector-kit	PRL4	A	195
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6CLL1	branch-connector-kit	CDP6, SB	A	539
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6LL61	branch-connector-kit	CDP6, SB	A	542
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6SCL1	branch-connector-kit	CDP6, SB	A	545
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6SLL1	branch-connector-kit	CDP6, SB	A	546
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	CCL600	lug		A	561
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	CLRSJL3	barrier		A	563
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	JDTERMSHIELD	barrier		A	563
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	RS5783	breaker-accessory		A	565
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	RS5784	breaker-accessory		A	565
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SCL	branch-connector-kit	P4	A	472
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SCLD	branch-connector-kit	P5, SB, CDP6	A	490

Breaker family	Part	Component	Equipment family	Cl.	Pg
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SL6	branch-connector-kit	P4	A	475
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SL6D	branch-connector-kit	P5, SB, CDP6	A	494
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSCL	branch-connector-kit	P4	A	476
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSCLD	branch-connector-kit	P5, SB, CDP6	A	496
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSL6	branch-connector-kit	P4	A	477
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSL6D	branch-connector-kit	P5, SB, CDP6	A	497
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	TA1L6750	lug		A	561
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	TA2J6500	lug		A	562
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	TA6JD20	lug		A	562
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	TC1J6600	lug		A	562
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	TC2J6500	lug		A	563
MA (EAT)	KCDPMC	branch-connector-kit	CDP	A	26
MA (EAT)	KCDPMDL	conversion-kit	CDP	A	42
MA (EAT)	KPRL4MC	branch-connector-kit	PRL4, PRL4X	A	196
MA (EAT)	KPRL4MD	branch-connector-kit	PRL4, PRL4X	A	197
MA (EAT)	KPRL4X34	branch-connector-kit	PRL4, PRL4X	A	205
MC (EAT)	KCDPMC	branch-connector-kit	CDP	A	26
MC (EAT)	KCDPMDL	conversion-kit	CDP	A	42
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	2TA2N8750	lug-kit		A	566
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	2TA3N8750	lug-kit		A	566
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	2TA4N8500	lug-kit		A	567
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	2TA4P8500	lug-kit		A	567
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	3TA2N8750	lug-kit		A	567
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	3TA3N8750	lug-kit		A	568

Breaker family	Part	Component	Equipment family	Cl.	Pg
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	3TA4N8500	lug-kit		A	568
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	3TA4P8500	lug-kit		A	568
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	6M61C	branch-connector-kit	CDP6, SB	A	543
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	6N61C	branch-connector-kit	CDP6, SB	A	543
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	CCM800K2	lug-kit		A	569
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	CCM800K3	lug-kit		A	569
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	CCN1200K2	lug-kit		A	569
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	CCN1200K3	lug-kit		A	569
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	MDTERMSHIELD	barrier		A	571
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	MG1D	branch-connector-kit	P5, SB, CDP6	A	484
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	NDTS	barrier		A	572
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	NG1D	branch-connector-kit	P5, SB, CDP6	A	484
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	RS5785	breaker-accessory		A	572
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	RS5786	breaker-accessory		A	573
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	RS5787	breaker-accessory		A	573
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	RS5788	breaker-accessory		A	573

Breaker family	Part	Component	Equipment family	Cl.	Pg
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SLM1D	branch-connector-kit	P5, SB, CDP6	A	495
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SMND	branch-connector-kit	P5, SB, CDP6	A	496
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SSMND	branch-connector-kit	P5, SB, CDP6	A	497
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	TA2K500	lug		A	570
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	TA2N750	lug		A	570
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	TA3K500	lug		A	571
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	TC2K500	lug		A	571
MDL (EAT)	KCDPMC	branch-connector-kit	CDP	A	26
MDL (EAT)	KCDPMDL	conversion-kit	CDP	A	42
MDL (EAT)	KPRL4MC	branch-connector-kit	PRL4, PRL4X	A	196
MDL (EAT)	KPRL4MD	branch-connector-kit	PRL4, PRL4X	A	197
MDL (EAT)	KPRL4X34	branch-connector-kit	PRL4, PRL4X	A	205
NB (EAT)	KCDPNC	branch-connector-kit	CDP	A	27
NB (EAT)	KCDPND	conversion-kit	CDP	A	43
NB (EAT)	KPRL4CND	branch-connector-kit	PRL4, PRL4X	A	185
NB (EAT)	KPRL4NC	branch-connector-kit	PRL4, PRL4X	A	198
NB (EAT)	KPRL4ND	branch-connector-kit	PRL4, PRL4X	A	199
NB (EAT)	KPRL4X35	branch-connector-kit	PRL4, PRL4X	A	206
NC (EAT)	KCDPNC	branch-connector-kit	CDP	A	27
NC (EAT)	KCDPND	conversion-kit	CDP	A	43
NC (EAT)	KPRL4NC	branch-connector-kit	PRL4, PRL4X	A	198
ND (EAT)	KCDPNC	branch-connector-kit	CDP	A	27
ND (EAT)	KCDPND	conversion-kit	CDP	A	43
ND (EAT)	KPRL4CND	branch-connector-kit	PRL4, PRL4X	A	185
ND (EAT)	KPRL4ND	branch-connector-kit	PRL4, PRL4X	A	199
ND (EAT)	KPRL4X35	branch-connector-kit	PRL4, PRL4X	A	206
NEB / HEB (SIE)	BBKEB32	branch-connector-kit	P3	A	462
NEB / HEB (SIE)	EBF1	filler-plate	P3, P4, P5	—	464
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	3TC1GG20	lug-kit		A	574
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	3TC1Q1	lug-kit		A	574
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TA6GG04	lug		A	574
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TC1Q1	lug		A	553
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TNKG3	hardware-kit		A	575

Breaker family	Part	Component	Equipment family	Cl.	Pg
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TSSG3A	barrier		A	575
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8072	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	126
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8073	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	126
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8076	deadfront	PRL3A, PRL3X	—	164
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8077	deadfront	PRL3A, PRL3X	—	164
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8078	deadfront	PRL3A, PRL3X	—	164
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8079	deadfront	PRL3A, PRL3X	—	165
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8080	deadfront	PRL3A, PRL3X	—	165
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8081	deadfront	PRL3A, PRL3X	—	165
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8082	deadfront	PRL3A, PRL3X	—	166
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8083H01	filler-plate	PRL3A, PRL3X	—	167
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11A2B	main-breaker-kit	PRL1X, PRL2X	A	132
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11A2T	main-breaker-kit	PRL1X, PRL2X	A	132
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11S2B	main-breaker-kit	PRL1X, PRL2X	A	133
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11S2T	main-breaker-kit	PRL1X, PRL2X	A	133
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13A2B	main-breaker-kit	PRL1X, PRL2X	A	133
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13A2T	main-breaker-kit	PRL1X, PRL2X	A	134
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13S2B	main-breaker-kit	PRL1X, PRL2X	A	134
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13S2T	main-breaker-kit	PRL1X, PRL2X	A	134
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21A2B	main-breaker-kit	PRL1X, PRL2X	A	135
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21A2T	main-breaker-kit	PRL1X, PRL2X	A	135
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21S2B	main-breaker-kit	PRL1X, PRL2X	A	135
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21S2T	main-breaker-kit	PRL1X, PRL2X	A	136
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23A2B	main-breaker-kit	PRL1X, PRL2X	A	136
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23A2T	main-breaker-kit	PRL1X, PRL2X	A	136
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23S2B	main-breaker-kit	PRL1X, PRL2X	A	137
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23S2T	main-breaker-kit	PRL1X, PRL2X	A	137
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X21T	branch-connector-kit	PRL3X	A	170
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X22	branch-connector-kit	PRL3X	A	170
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X22T	branch-connector-kit	PRL3X	A	170

Breaker family	Part	Component	Equipment family	Cl.	Pg
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X23	branch-connector-kit	PRL3X	A	171
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X23T	branch-connector-kit	PRL3X	A	171
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL4X12	branch-connector-kit	PRL4, PRL4X	A	201
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL4X22	branch-connector-kit	PRL4, PRL4X	A	202
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL4X32	branch-connector-kit	PRL4, PRL4X	A	203
Power Defense frame 2 (PDG2 / PDD2) (EAT)	PRLSEBFD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X	A	122
Power Defense frame 2 (PDG2 / PDD2) (EAT)	PRLSEBPD2	barrier	PRL3X	A	177
Power Defense frame 2 (PDG2 / PDD2) (EAT)	PRXP4PD2FILL1	filler-plate	PRL4X	—	209
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	42C7980	deadfront	PRL3X	—	178
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	42C7982	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	126
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	42C8055	deadfront	PRL3X	—	178
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41A14B	main-breaker-kit	PRL1X, PRL2X	A	137
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41A14T	main-breaker-kit	PRL1X, PRL2X	A	138
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41S14B	main-breaker-kit	PRL1X, PRL2X	A	138
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41S14T	main-breaker-kit	PRL1X, PRL2X	A	139
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43A34B	main-breaker-kit	PRL1X, PRL2X	A	139
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43A34T	main-breaker-kit	PRL1X, PRL2X	A	140
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43S34B	main-breaker-kit	PRL1X, PRL2X	A	140
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43S34T	main-breaker-kit	PRL1X, PRL2X	A	141
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB61S16B	main-breaker-kit	PRL1X, PRL2X	A	141
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB61S16T	main-breaker-kit	PRL1X, PRL2X	A	142
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB63S36B	main-breaker-kit	PRL1X, PRL2X	A	142
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB63S36T	main-breaker-kit	PRL1X, PRL2X	A	143
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KPRL4X334S	branch-connector-kit	PRL4, PRL4X	A	203
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KPRL4X334T	branch-connector-kit	PRL4, PRL4X	A	204
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KPRL4X336	branch-connector-kit	PRL4, PRL4X	A	205
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	PRLSEBLGKD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X	A	123
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	PRLSEBPD3	barrier	PRL3X	A	177
Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5) (EAT)	KPRL4X34	branch-connector-kit	PRL4, PRL4X	A	205

Breaker family	Part	Component	Equipment family	Cl.	Pg
Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5) (EAT)	KPRL4X35	branch-connector-kit	PRL4, PRL4X	A	206
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	6QJ2	branch-connector-kit	CDP6, SB	A	544
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQ1	branch-connector-kit	P2	A	452
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQ2	branch-connector-kit	P3	A	462
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQRP1FK	conversion-kit	P2	—	461
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQRP2FK	conversion-kit	P3	—	466
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	DFFPQJ01	filler-plate	RP1, P1	—	527
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	DFFPQJ02	filler-plate	RP1, P1	—	528
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	SQRC	other	P4, P5	—	480
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	TA1Q300	lug-kit		C	575
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL150HD	lug-kit	QMB, QED-2, I-LINE	A	236
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL175JD	lug-kit	QMB, QED-2, I-LINE	A	236
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL250JD	lug-kit	QMB, QED-2, I-LINE	A	237
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL400LA	lug-kit	QMB, QED-2, I-LINE	A	237
QMB circuit breaker units (H-, J-, L-frame) (SQD)	CU150HD	lug-kit	QMB, QED-2, I-LINE	A	237
QMB circuit breaker units (H-, J-, L-frame) (SQD)	CU250JD	lug-kit	QMB, QED-2, I-LINE	A	237
QMB circuit breaker units (H-, J-, L-frame) (SQD)	CU400LA	lug-kit	QMB, QED-2, I-LINE	A	238
QMB circuit breaker units (H-, J-, L-frame) (SQD)	QMB3300LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	283
QMB circuit breaker units (H-, J-, L-frame) (SQD)	QMB3400LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	283
QR2 / QRH2 / HQR2 / HQR2H (SIE)	3TA1QR300	lug-kit		A	576
QR2 / QRH2 / HQR2 / HQR2H (SIE)	3TC1QR250	lug-kit		A	576
QR2 / QRH2 / HQR2 / HQR2H (SIE)	6QR2	branch-connector-kit	P5, SB, CDP6	A	483
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQR1	branch-connector-kit	P2	A	452
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQR2	branch-connector-kit	P3	A	463
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQRP1FK	conversion-kit	P2	—	461
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQRP2FK	conversion-kit	P3	—	466
QR2 / QRH2 / HQR2 / HQR2H (SIE)	CCQ250	lug		A	577
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR1	main-breaker-kit	P1, S1/S2	A	445
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR1A	main-breaker-kit	RP1	A	502
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR3	main-breaker-kit	P1, S1/S2	A	445

Breaker family	Part	Component	Equipment family	Cl.	Pg
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR3A	main-breaker-kit	RP1	A	503
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQRFK	filler-plate	RP1, P1	—	529
QR2 / QRH2 / HQR2 / HQR2H (SIE)	P2QRFP01	filler-plate	P2	—	459
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQR	branch-connector-kit	P4	A	475
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQRC	other	P4, P5	—	480
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQRD	branch-connector-kit	SB	A	550
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	325
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5700P86	mounting-bracket	A-SERIES-PWR	—	322
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	318
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	318
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	319
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AFP2FBD	filler-plate	SPECTRA-PP	A	383
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AFP3FBD	filler-plate	SPECTRA-PP	A	385
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AHKBFB1	hardware-kit	SPECTRA-PP	A	393
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMC6FBFP	breaker-mounting-kit	SPECTRA-PP	A	375
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMCB4FBFP	branch-connector-kit	SPECTRA-PP	A	349
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMCB6FBFP	branch-connector-kit	SPECTRA-PP	A	353
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPFB12P	breaker-mounting-kit	A-SERIES	—	306
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPFB3P	breaker-mounting-kit	A-SERIES	—	306
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPP6FB6D	branch-connector-kit	A-SERIES-PWR	A	314
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	TEDFP1	filler-plate	A-SERIES	—	309
Record Plus FB 100 (GEA)	FCAL12	lug		A	421
Record Plus FB 100 (GEA)	FCAL13	lug		A	421
Record Plus FB 100 (GEA)	FCAL14	lug		A	421
Record Plus FB 100 (GEA)	FCALK12	lug-kit		A	420
Record Plus FB 100 (GEA)	FCALK13	lug-kit		A	420
Record Plus FB 100 (GEA)	FCALK14	lug-kit		A	420
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AHKBFD1	hardware-kit	SPECTRA-PP	A	393
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AHKFD1	hardware-kit	SPECTRA-PP	A	394
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC4FDBFP	breaker-mounting-kit	SPECTRA-PP	A	367
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC4FDSFP	breaker-mounting-kit	SPECTRA-PP	A	368

Breaker family	Part	Component	Equipment family	Cl.	Pg
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC6FDBFP	breaker-mounting-kit	SPECTRA-PP	A	375
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC6FDSPF	breaker-mounting-kit	SPECTRA-PP	A	376
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMCB4FDBFP	branch-connector-kit	SPECTRA-PP	A	349
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMCB6FDBFP	branch-connector-kit	SPECTRA-PP	A	354
Record Plus FC 100 (GEA)	FCAL12	lug		A	421
Record Plus FC 100 (GEA)	FCAL13	lug		A	421
Record Plus FC 100 (GEA)	FCAL14	lug		A	421
Record Plus FC 100 (GEA)	FCALK12	lug-kit		A	420
Record Plus FC 100 (GEA)	FCALK13	lug-kit		A	420
Record Plus FC 100 (GEA)	FCALK14	lug-kit		A	420
Record Plus FE 250 (GEA)	FCAL15	lug		A	423
Record Plus FE 250 (GEA)	FCAL16	lug		A	423
Record Plus FE 250 (GEA)	FCALK15	lug-kit		A	422
Record Plus FE 250 (GEA)	FCALK15LV	lug-kit		A	422
Record Plus FE 250 (GEA)	FCALK16	lug-kit		A	422
Record Plus FE 250 (GEA)	FCALK16LV	lug-kit		A	423
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AFP4FGD	filler-plate	SPECTRA-PP	A	386
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AFP4FGS	filler-plate	SPECTRA-PP	A	387
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AHKBFG1	hardware-kit	SPECTRA-PP	A	393
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AHKFG1	hardware-kit	SPECTRA-PP	A	395
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC2FGMFP	breaker-mounting-kit	SPECTRA-PP	A	359
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC3FGMFP	breaker-mounting-kit	SPECTRA-PP	A	363
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC4FGBFP	breaker-mounting-kit	SPECTRA-PP	A	368
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC6FGBFP	breaker-mounting-kit	SPECTRA-PP	A	376
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB2FGMFP	branch-connector-kit	SPECTRA-PP	A	342
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB3FGMFP	branch-connector-kit	SPECTRA-PP	A	345
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB4FGBFP	branch-connector-kit	SPECTRA-PP	A	349
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB6FGBFP	branch-connector-kit	SPECTRA-PP	A	354
Record Plus FG 600 (GEA)	FCALK218H	lug-kit		A	424

Breaker family	Part	Component	Equipment family	Cl.	Pg
Record Plus FG 600 (GEA)	FCALK318H	lug-kit		A	424
Record Plus FG 600 (GEA)	FGH1LCK	breaker-accessory		A	425
Record Plus FG 600 (GEA)	FGJN3	breaker-accessory		A	425
Record Plus FG 600 (GEA)	FGJS3	barrier		A	424
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	MDTERMSHIELD	barrier		A	571
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TA4P750	lug		A	577
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TA5P600	lug		A	577
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TA6R600	lug		A	578
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TC5R600	lug		A	578
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	MDTERMSHIELD	barrier		A	571
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	TA6R600	lug		A	578
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	TC5R600	lug		A	578
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MG1	branch-connector-kit	P4	A	467
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MG1D	branch-connector-kit	P5, SB, CDP6	A	484
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	NG1D	branch-connector-kit	P5, SB, CDP6	A	484
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SDGD	branch-connector-kit	P4, P5, SB, CDP6	A	472
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SFG	branch-connector-kit	P4	A	473
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SFGD	branch-connector-kit	P5, SB, CDP6	A	491
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG	branch-connector-kit	P4	A	474
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG1D	branch-connector-kit	P5, SB, CDP6	A	493
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG2D	branch-connector-kit	P5, SB, CDP6	A	494
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SLG	branch-connector-kit	P4	A	475
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SLGD	branch-connector-kit	P5, SB, CDP6	A	495
Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH (EAT)	KPRL4LG	branch-connector-kit	PRL4, PRL4X	A	196
Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH (EAT)	KPRL4X336	branch-connector-kit	PRL4, PRL4X	A	205
Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH (EAT)	PRLSEBLGKD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X	A	123
Spectra RMS SE150 (GEA)	SE3LCK	breaker-accessory		A	428
Spectra RMS SE150 (GEA)	SE3LCKL	breaker-accessory		A	428
Spectra RMS SE150 (GEA)	TC018	lug		A	426
Spectra RMS SE150 (GEA)	TCAL18	lug		A	427
Spectra RMS SE150 (GEA)	TCAL18LV	lug		A	427

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra RMS SE150 (GEA)	TCAL19PD1	lug		A	427
Spectra RMS SE150 (GEA)	TCAL19PD3	lug-kit		A	425
Spectra RMS SE150 (GEA)	TCALK318	lug-kit		A	426
Spectra RMS SE150 (GEA)	TEF1	breaker-accessory		A	399
Spectra RMS SE150 (GEA)	TEF2	breaker-accessory		A	399
Spectra RMS SE150 (GEA)	TEF3	breaker-accessory		A	399
Spectra RMS SE150 (GEA)	TEF4	breaker-accessory		A	400
Spectra RMS SF250 (GEA)	SF3LCK	breaker-accessory		A	431
Spectra RMS SF250 (GEA)	TCAL28PD1	lug		A	429
Spectra RMS SF250 (GEA)	TCAL28PD3	lug-kit		A	428
Spectra RMS SF250 (GEA)	TCAL29	lug		A	430
Spectra RMS SF250 (GEA)	TCAL29LV	lug		A	430
Spectra RMS SF250 (GEA)	TCALK329	lug-kit		A	429
Spectra RMS SF250 (GEA)	TCO29	lug		A	430
Spectra RMS SF250 (GEA)	TFK1	breaker-accessory		A	402
Spectra RMS SF250 (GEA)	TFK2	breaker-accessory		A	402
Spectra RMS SG600 (GEA)	SG1BCK	breaker-accessory		A	434
Spectra RMS SG600 (GEA)	SG1LCK	breaker-accessory		A	434
Spectra RMS SG600 (GEA)	SGBCS1	breaker-accessory		A	434
Spectra RMS SG600 (GEA)	SGBCS2	breaker-accessory		A	435
Spectra RMS SG600 (GEA)	SGLVK	breaker-accessory		A	435
Spectra RMS SG600 (GEA)	TCAL40PD1	lug		A	433
Spectra RMS SG600 (GEA)	TCAL40PD3	lug-kit		A	431
Spectra RMS SG600 (GEA)	TCLK265	lug-kit		A	432
Spectra RMS SG600 (GEA)	TCLK365	lug-kit		A	432
Spectra RMS SG600 (GEA)	TCOK265	lug-kit		A	433
Spectra RMS SG600 (GEA)	TCOK365	lug-kit		A	433
Spectra RMS SK1200 (GEA)	SK1LCK	breaker-accessory		A	438
Spectra RMS SK1200 (GEA)	SKLVK	breaker-accessory		A	418
Spectra RMS SK1200 (GEA)	SKPSHLD	barrier		A	438
Spectra RMS SK1200 (GEA)	TC0121	lug		A	411
Spectra RMS SK1200 (GEA)	TC081A	lug		A	413
Spectra RMS SK1200 (GEA)	TCAL124	lug		A	437
Spectra RMS SK1200 (GEA)	TCAL125	lug		A	437
Spectra RMS SK1200 (GEA)	TCAL81	lug		A	416
Spectra RMS SK1200 (GEA)	TCALK2124	lug-kit		A	435
Spectra RMS SK1200 (GEA)	TCALK2125	lug-kit		A	436
Spectra RMS SK1200 (GEA)	TCALK281	lug-kit		A	408
Spectra RMS SK1200 (GEA)	TCALK3124	lug-kit		A	436
Spectra RMS SK1200 (GEA)	TCALK3125	lug-kit		A	436
Spectra RMS SK1200 (GEA)	TCALK381	lug-kit		A	410
Spectra RMS SK1200 (GEA)	TCO124	lug		A	437
Spectra RMS SK1200 (GEA)	TCO125	lug		A	438
Spectra RMS SK1200 (GEA)	TKM11	breaker-accessory		A	419
Spectra RMS SK1200 (GEA)	TKM12	breaker-accessory		A	419
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5500P82	mounting-bracket	A-SERIES-PWR	—	322
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	325
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	318

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	318
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	319
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	ACTMKSE	branch-connector-kit	SCP-PLUS	A	334
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AFP3SED	filler-plate	SPECTRA-PP	A	385
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AHKBE1	hardware-kit	SPECTRA-PP	A	392
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC4EBSFP	breaker-mounting-kit	SPECTRA-PP	A	367
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC4SEFP	breaker-mounting-kit	SPECTRA-PP	A	373
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC6EBSFP	breaker-mounting-kit	SPECTRA-PP	A	374
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB4SEFP	branch-connector-kit	SPECTRA-PP	A	352
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	ASPP6SE6D	branch-connector-kit	A-SERIES-PWR	A	316
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	MB133WB	main-breaker-kit	A-SERIES	A	297
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	NHB150PK	branch-connector-kit	NHB	C	331
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	TEDFP1	filler-plate	A-SERIES	—	309
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5500P84	mounting-bracket	A-SERIES-PWR	—	322
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5503P90	filler-plate	A-SERIES-PWR	—	325
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702ASFG1	connector-strap	A-SERIES-PWR	—	318
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702BSFG1	connector-strap	A-SERIES-PWR	—	319
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702CSFG1	connector-strap	A-SERIES-PWR	—	319
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ACTMKSF	branch-connector-kit	SCP-PLUS	A	335
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP3SFD	filler-plate	SPECTRA-PP	A	385
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP3SFS	filler-plate	SPECTRA-PP	A	386
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AHKBF1	hardware-kit	SPECTRA-PP	A	393
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AHKF1	hardware-kit	SPECTRA-PP	A	394
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC2FJFP	breaker-mounting-kit	SPECTRA-PP	A	359
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC2FLSFP	breaker-mounting-kit	SPECTRA-PP	A	360

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC3FJFP	breaker-mounting-kit	SPECTRA-PP	A	363
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC3FLSFP	breaker-mounting-kit	SPECTRA-PP	A	364
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC4FJFP	breaker-mounting-kit	SPECTRA-PP	A	369
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC4FLSFP	breaker-mounting-kit	SPECTRA-PP	A	370
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC6FJFP	breaker-mounting-kit	SPECTRA-PP	A	377
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC6FLSFP	breaker-mounting-kit	SPECTRA-PP	A	378
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB2FJFP	branch-connector-kit	SPECTRA-PP	A	343
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB3FJFP	branch-connector-kit	SPECTRA-PP	A	345
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB4FJFP	branch-connector-kit	SPECTRA-PP	A	350
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB6FJFP	branch-connector-kit	SPECTRA-PP	A	355
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ASP2PTFJ3P	conversion-kit	A-SERIES	—	311
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ASPP6SF3S	branch-connector-kit	A-SERIES-PWR	A	316
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB233	main-breaker-kit	A-SERIES	A	297
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB2332	main-breaker-kit	A-SERIES	A	297
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB2332WB	main-breaker-kit	A-SERIES	A	298
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB233WB	main-breaker-kit	A-SERIES	A	298
Spectra SF (SFHA/SFLA/SFPA) (GEA)	SF2DPK	branch-connector-kit	CCB-QMR	A	326
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	139C5500P83	mounting-bracket	A-SERIES-PWR	—	322
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	139C5503P103	filler-plate	A-SERIES-PWR	—	324
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P7	connector-strap	A-SERIES-PWR	—	320
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P8	connector-strap	A-SERIES-PWR	—	320
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P9	connector-strap	A-SERIES-PWR	—	320
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACSMKSG	branch-connector-kit	SCP-PLUS	A	332
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACTMKSG	branch-connector-kit	SCP-PLUS	A	335
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AFP4SGD	filler-plate	SPECTRA-PP	A	387
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AFP4SGS	filler-plate	SPECTRA-PP	A	387

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AHKBG1	hardware-kit	SPECTRA-PP	A	393
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AHKG1	hardware-kit	SPECTRA-PP	A	395
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC2GMFP	breaker-mounting-kit	SPECTRA-PP	A	361
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC3GMFP	breaker-mounting-kit	SPECTRA-PP	A	365
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC4GBFP	breaker-mounting-kit	SPECTRA-PP	A	371
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC6GBFP	breaker-mounting-kit	SPECTRA-PP	A	378
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB2GMFP	branch-connector-kit	SPECTRA-PP	A	344
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB3GMFP	branch-connector-kit	SPECTRA-PP	A	346
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB4GBFP	branch-connector-kit	SPECTRA-PP	A	351
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB6GBFP	branch-connector-kit	SPECTRA-PP	A	356
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ASPP6SG3S	branch-connector-kit	A-SERIES-PWR	A	317
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB332	main-breaker-kit	A-SERIES	A	298
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB332WB	main-breaker-kit	A-SERIES	A	299
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB333	main-breaker-kit	A-SERIES	A	299
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB333WB	main-breaker-kit	A-SERIES	A	299
Spectra SK (SKHA/SKLA/SKPA) (GEA)	ACSMKSK	branch-connector-kit	SCP-PLUS	A	332
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AFP5LCS	filler-plate	SPECTRA-PP	A	387
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AFP6SKS	filler-plate	SPECTRA-PP	A	388
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AHKLB1	hardware-kit	SPECTRA-PP	A	395
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMC2KMFP	breaker-mounting-kit	SPECTRA-PP	A	362
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMC3KMFP	breaker-mounting-kit	SPECTRA-PP	A	366
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB2KMFP	branch-connector-kit	SPECTRA-PP	A	344
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB3KMFP	branch-connector-kit	SPECTRA-PP	A	347
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB3LBFP	branch-connector-kit	SPECTRA-PP	A	347

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SK (SKHA/SKLA/SKPA) (GEA)	SK12SPK	branch-connector-kit	CCB-QMR	A	326
Spectra SK (SKHA/SKLA/SKPA) (GEA)	SK8SPK	branch-connector-kit	CCB-QMR	A	326
TEB / TED / THED / TED4 / TED6 (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	325
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	318
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	318
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	319
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB1P	branch-connector-kit	SCP-PLUS	A	332
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB2P	branch-connector-kit	SCP-PLUS	A	333
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB3P	branch-connector-kit	SCP-PLUS	A	333
TEB / TED / THED / TED4 / TED6 (GEA)	AFP2TED	filler-plate	SPECTRA-PP	A	384
TEB / TED / THED / TED4 / TED6 (GEA)	AHKE1	hardware-kit	SPECTRA-PP	A	394
TEB / TED / THED / TED4 / TED6 (GEA)	AHKEL1	hardware-kit	SPECTRA-PP	A	394
TEB / TED / THED / TED4 / TED6 (GEA)	AMC4EBFP	breaker-mounting-kit	SPECTRA-PP	A	366
TEB / TED / THED / TED4 / TED6 (GEA)	AMC6EBFP	breaker-mounting-kit	SPECTRA-PP	A	373
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB4EBFP	branch-connector-kit	SPECTRA-PP	A	348
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB6EBFP	branch-connector-kit	SPECTRA-PP	A	352
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB6TEDL	filler-plate	SPECTRA-PP	—	388
TEB / TED / THED / TED4 / TED6 (GEA)	ASPTED3P	breaker-mounting-kit	A-SERIES	—	306
TEB / TED / THED / TED4 / TED6 (GEA)	MB133	main-breaker-kit	A-SERIES	A	296
TEB / TED / THED / TED4 / TED6 (GEA)	NHB150PK	branch-connector-kit	NHB	C	331
TEB / TED / THED / TED4 / TED6 (GEA)	TED1DPK	branch-connector-kit	CCB-QMR	A	327
TEB / TED / THED / TED4 / TED6 (GEA)	TEDFP1	filler-plate	A-SERIES	—	309
TEB / TED / THED / TED4 / TED6 (GEA)	TEL1DPK	branch-connector-kit	CCB-QMR	A	327
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	139C5503P129	filler-plate	A-SERIES-PWR	—	324
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	315A7048P20	connector-strap	A-SERIES-PWR	—	321
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	315A7049P10	connector-strap	A-SERIES-PWR	—	321
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	911E347P3	insulator	A-SERIES-PWR	—	323
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AFP3EYD	filler-plate	SPECTRA-PP	A	384
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMC6EYFP	breaker-mounting-kit	SPECTRA-PP	A	374
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB4EYFP	branch-connector-kit	SPECTRA-PP	A	348

Breaker family	Part	Component	Equipment family	Cl.	Pg
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB6EYFP	branch-connector-kit	SPECTRA-PP	A	353
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	ASPP6EY12D	branch-connector-kit	A-SERIES-PWR	A	313
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	ASPP6EY6D	branch-connector-kit	A-SERIES-PWR	A	313
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	MB423	main-breaker-kit	A-SERIES	A	300
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	MB426	main-breaker-kit	A-SERIES	A	300
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	309
TFJ / TFK / THFK / TFL (GEA)	139C5503P90	filler-plate	A-SERIES-PWR	—	325
TFJ / TFK / THFK / TFL (GEA)	AFP3TFD	filler-plate	SPECTRA-PP	A	386
TFJ / TFK / THFK / TFL (GEA)	AFP3TFS	filler-plate	SPECTRA-PP	A	386
TFJ / TFK / THFK / TFL (GEA)	AMC2FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	360
TFJ / TFK / THFK / TFL (GEA)	AMC3FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	364
TFJ / TFK / THFK / TFL (GEA)	AMC4FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	370
TFJ / TFK / THFK / TFL (GEA)	AMC6FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	377
TFJ / TFK / THFK / TFL (GEA)	AMCB2FJFPTF	branch-connector-kit	SPECTRA-PP	A	343
TFJ / TFK / THFK / TFL (GEA)	AMCB3FJFPTF	branch-connector-kit	SPECTRA-PP	A	346
TFJ / TFK / THFK / TFL (GEA)	AMCB4FJFPTF	branch-connector-kit	SPECTRA-PP	A	350
TFJ / TFK / THFK / TFL (GEA)	AMCB6FJFPTF	branch-connector-kit	SPECTRA-PP	A	355
TFJ / TFK / THFK / TFL (GEA)	TF2DPK	branch-connector-kit	CCB-QMR	A	327
THQB / THHQB / TXQB (GEA)	139C5362P2	filler-plate	A-SERIES-PWR	—	323
THQB / THHQB / TXQB (GEA)	315A7048P20	connector-strap	A-SERIES-PWR	—	321
THQB / THHQB / TXQB (GEA)	315A7049P10	connector-strap	A-SERIES-PWR	—	321
THQB / THHQB / TXQB (GEA)	911E347P3	insulator	A-SERIES-PWR	—	323
THQB / THHQB / TXQB (GEA)	AMC6QBFP	breaker-mounting-kit	SPECTRA-PP	A	379
THQB / THHQB / TXQB (GEA)	ASPP6QB12D	branch-connector-kit	A-SERIES-PWR	A	314
THQB / THHQB / TXQB (GEA)	ASPP6QB6D	branch-connector-kit	A-SERIES-PWR	A	315
THQB / THHQB / TXQB (GEA)	MB612	main-breaker-kit	A-SERIES	A	301
THQB / THHQB / TXQB (GEA)	MB613	main-breaker-kit	A-SERIES	A	302
THQB / THHQB / TXQB (GEA)	MB614	main-breaker-kit	A-SERIES	A	302
THQB / THHQB / TXQB (GEA)	MB616	main-breaker-kit	A-SERIES	A	302
THQB / THHQB / TXQB (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	309
THQL / THHQL / TXQL (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	309
TJD / TJJ / TJK / THJK (GEA)	ACTMKJD	branch-connector-kit	SCP-PLUS	A	333
TJD / TJJ / TJK / THJK (GEA)	AHKJ1	hardware-kit	SPECTRA-PP	A	395
TJD / TJJ / TJK / THJK (GEA)	AMC2JKFP	breaker-mounting-kit	SPECTRA-PP	A	362
TJD / TJJ / TJK / THJK (GEA)	AMC3JKFP	breaker-mounting-kit	SPECTRA-PP	A	365
TJD / TJJ / TJK / THJK (GEA)	AMC4JKFP	breaker-mounting-kit	SPECTRA-PP	A	371
TJD / TJJ / TJK / THJK (GEA)	AMC6JKFP	breaker-mounting-kit	SPECTRA-PP	A	379
TJD / TJJ / TJK / THJK (GEA)	TJ4DPK	branch-connector-kit	CCB-QMR	A	327
TJD / TJJ / TJK / THJK (GEA)	TJ6DPK	branch-connector-kit	CCB-QMR	A	328

Breaker family	Part	Component	Equipment family	Cl.	Pg
TKM / THKM (GEA)	TK12SPK	branch-connector-kit	CCB-QMR	A	328
TKM / THKM (GEA)	TK8SPK	branch-connector-kit	CCB-QMR	A	328
TQD / THQD (GEA)	139C5500P81	mounting-bracket	A-SERIES-PWR	—	321
TQD / THQD (GEA)	139C5503P64	filler-plate	A-SERIES-PWR	—	324
TQD / THQD (GEA)	139C5702AQDG1	connector-strap	A-SERIES-PWR	—	317
TQD / THQD (GEA)	139C5702BQDG1	connector-strap	A-SERIES-PWR	—	318
TQD / THQD (GEA)	139C5702CQDG1	connector-strap	A-SERIES-PWR	—	319
TQD / THQD (GEA)	ACTMKQD2P	branch-connector-kit	SCP-PLUS	A	334
TQD / THQD (GEA)	ACTMKQD3P	branch-connector-kit	SCP-PLUS	A	334
TQD / THQD (GEA)	AFP2QDD	filler-plate	SPECTRA-PP	A	384
TQD / THQD (GEA)	AFP3QDD	filler-plate	SPECTRA-PP	A	385
TQD / THQD (GEA)	AHKBQ1	hardware-kit	SPECTRA-PP	A	393
TQD / THQD (GEA)	AHKQ1	hardware-kit	SPECTRA-PP	A	396
TQD / THQD (GEA)	AMC4QDFP	breaker-mounting-kit	SPECTRA-PP	A	372
TQD / THQD (GEA)	AMC6QDFP	breaker-mounting-kit	SPECTRA-PP	A	380
TQD / THQD (GEA)	AMCB4QDFP	branch-connector-kit	SPECTRA-PP	A	351
TQD / THQD (GEA)	AMCB6QDFP	branch-connector-kit	SPECTRA-PP	A	356
TQD / THQD (GEA)	ASP2PTQD3P	conversion-kit	A-SERIES	—	311
TQD / THQD (GEA)	ASPP6QD6D	branch-connector-kit	A-SERIES-PWR	A	315
TQD / THQD (GEA)	ASPTQD3P	breaker-mounting-kit	A-SERIES	—	306
TQD / THQD (GEA)	MB512	main-breaker-kit	A-SERIES	A	300
TQD / THQD (GEA)	MB513	main-breaker-kit	A-SERIES	A	301
TQD / THQD (GEA)	MB516	main-breaker-kit	A-SERIES	A	301
TQD / THQD (GEA)	TEDFP1	filler-plate	A-SERIES	—	309
TQD / THQD (GEA)	TQ2DPK	branch-connector-kit	CCB-QMR	A	328
TQD / THQD (GEA)	TQDFM1	breaker-accessory	A-SERIES	—	311
TQD / THQD (Q-Line 225A) (GEA)	TCAL25	lug		A	439
TQD / THQD (Q-Line 225A) (GEA)	TCALK325	lug-kit		A	439
Tri-Pac (EAT)	4176B57	deadfront	PRL3A	—	159
Tri-Pac (EAT)	4176B70	deadfront	PRL3A	—	161
Tri-Pac (EAT)	KCDPFBP	branch-connector-kit	CDP	A	22
Tri-Pac (EAT)	KCDPLA400	branch-connector-kit	CDP	A	23
Tri-Pac (EAT)	KCDPNBP	branch-connector-kit	CDP	A	27
Tri-Pac (EAT)	KPRL4FBP	branch-connector-kit	PRL4, PRL4X	A	187
Tri-Pac (EAT)	KPRL4LAP	branch-connector-kit	PRL4, PRL4X	A	193
Tri-Pac (EAT)	KPRL4NBP	branch-connector-kit	PRL4, PRL4X	A	198

9.5 Component-type index

Component type	Parts (OEM PN → page)
main-breaker-kit	KB11A2B (EAT), KB11A2T (EAT), KB11AFB (EAT), KB11AFT (EAT), KB11S2B (EAT), KB11S2T (EAT), KB11SFB (EAT), KB11SFT (EAT), KB13A2B (EAT), KB13A2T (EAT), KB13AFB (EAT), KB13AFT (EAT), KB13S2B (EAT), KB13S2T (EAT), KB13SFB (EAT), KB13SFT (EAT), KB21A2B (EAT), KB21A2T (EAT), KB21AFB (EAT), KB21AFT (EAT), KB21S2B (EAT), KB21S2T (EAT), KB21SFB (EAT), KB21SFT (EAT), KB23A2B (EAT), KB23A2T (EAT), KB23AFB (EAT), KB23AFT (EAT), KB23S2B (EAT), KB23S2T (EAT), KB23SFB (EAT), KB23SFT (EAT), KB41A14B (EAT), KB41A14T (EAT), KB41AJB (EAT), KB41AJT (EAT), KB41AKB (EAT), KB41AKT (EAT), KB41S14B (EAT), KB41S14T (EAT), KB41SJB (EAT), KB41SJT (EAT), KB41SKB (EAT), KB41SKT (EAT), KB43A34B (EAT), KB43A34T (EAT), KB43AJB (EAT), KB43AJT (EAT), KB43AKB (EAT), KB43AKT (EAT), KB43S34B (EAT), KB43S34T (EAT), KB43SJB (EAT), KB43SJT (EAT), KB43SKB (EAT), KB43SKT (EAT), KB61S16B (EAT), KB61S16T (EAT), KB63S36B (EAT), KB63S36T (EAT), MB133 (GEA), MB133WB (GEA), MB233 (GEA), MB2332 (GEA), MB2332WB (GEA), MB233WB (GEA), MB332 (GEA), MB332WB (GEA), MB333 (GEA), MB333WB (GEA), MB423 (GEA), MB426 (GEA), MB512 (GEA), MB513 (GEA), MB516 (GEA), MB612 (GEA), MB613 (GEA), MB614 (GEA), MB616 (GEA), MBKBC3 (SIE), MBKBL1 (SIE), MBKBL3 (SIE), MBKED1 (SIE), MBKED1A (SIE), MBKED3 (SIE), MBKED3A (SIE), MBKFD1 (SIE), MBKFD1A (SIE), MBKFD3 (SIE), MBKFD3A (SIE), MBKJD1 (SIE), MBKJD3 (SIE), MBKJD3B (SIE), MBKNB1 (SIE), MBKNB3 (SIE), MBKQR1 (SIE), MBKQR1A (SIE), MBKQR3 (SIE), MBKQR3A (SIE), MBKVA41A (SIE), MBKVA41B (SIE), MBKVA5262A (SIE), MBKVA5262B (SIE), MBKVA5363A (SIE), SMBKED1 (SIE), SMBKED3 (SIE), SMBKFD1 (SIE), SMBKFD3 (SIE), SMBKJD1 (SIE), SMBKJD3 (SIE)
main-lug-kit	5PLUG31200TC (EAT), 5PLUG3400SC (EAT), 5PLUG3600SC (EAT), 5PLUG3800SC (EAT), BRL200 (EAT), KL11AMO (EAT), KL11AMS (EAT), KL11AVO (EAT), KL11AVS (EAT), KL11SCO (EAT), KL11SCS (EAT), KL11SMO (EAT), KL11SMS (EAT), KL11SVO (EAT), KL11SVS (EAT), KL13AMO (EAT), KL13AMS (EAT), KL13AVO (EAT), KL13AVS (EAT), KL13SCO (EAT), KL13SCS (EAT), KL13SMO (EAT), KL13SMS (EAT), KL13SVO (EAT), KL13SVS (EAT), KL21AMO (EAT), KL21AMS (EAT), KL21AVO (EAT), KL21AVS (EAT), KL21SCO (EAT), KL21SCS (EAT), KL21SMO (EAT), KL21SMS (EAT), KL21SVO (EAT), KL21SVS (EAT), KL23AMO (EAT), KL23AMS (EAT), KL23AVO (EAT), KL23AVS (EAT), KL23SCO (EAT), KL23SCS (EAT), KL23SMO (EAT), KL23SMS (EAT), KL23SVO (EAT), KL23SVS (EAT), KL41AMO (EAT), KL41AMS (EAT), KL41AVO (EAT), KL41AVS (EAT), KL41SCO (EAT), KL41SMO (EAT), KL41SMS (EAT), KL41SVO (EAT), KL41SVS (EAT), KL43AMO (EAT), KL43AMS (EAT), KL43AVO (EAT), KL43AVS (EAT), KL43SCO (EAT), KL43SMO (EAT), KL43SMS (EAT), KL43SVO (EAT), KL43SVS (EAT), KL61CMO (EAT), KL61CMS (EAT), KL61CVO (EAT), KL61CVS (EAT), KL61SMO (EAT), KL61SMS (EAT), KL61SVO (EAT), KL61SVS (EAT), KL61TMO (EAT), KL61TMS (EAT), KL61TVO (EAT), KL61TVS (EAT), KL63CMO (EAT), KL63CMS (EAT), KL63CVO (EAT), KL63CVS (EAT), KL63SMO (EAT), KL63SMS (EAT), KL63SVO (EAT), KL63SVS (EAT), KL63TMO (EAT), KL63TMS (EAT), KL63TVO (EAT), KL63TVS (EAT), AML3120CFP (GEA), AML3120FP (GEA), AML3250CFP (GEA), AML3250FP (GEA), AML3250SFP (GEA), AML3400CFP (GEA), AML3400FP (GEA), AML3400SFP (GEA), AML3600CFP (GEA), AML3600FP (GEA), AML3600SFP (GEA), AML3800CFP (GEA), AML3800FP (GEA), MLA1 (GEA), MLA2 (GEA), MLA41 (GEA), MLA61 (GEA), MLA62 (GEA), MLR1 (GEA), MLR2 (GEA), MLR41 (GEA), MLR61 (GEA), MLT1 (GEA), MLT2 (GEA), MLT41 (GEA), MLT42 (GEA), 4MLKA1 (SIE), 4MLKA1A (SIE), 4MLKA1B (SIE), 4MLKA3 (SIE), 4MLKA3A (SIE), 4MLKA3B (SIE), 4MLKC1 (SIE), 4MLKC1A (SIE), 4MLKC3 (SIE), 4MLKC3A (SIE), MLKA1 (SIE), MLKA1A (SIE), MLKA3 (SIE), MLKA3A (SIE), MLKC1 (SIE), MLKC1A (SIE), MLKC3 (SIE), MLKC3A (SIE), QMB12CLA (SQD), QMB8CLA (SQD)
sub-feed-lug-kit	3BRS225 (EAT), 3BRSF150 (EAT), BRS225 (EAT), BRSF125 (EAT), BRSF150 (EAT), KL11AMF (EAT), KL11AVF (EAT), KL11SCF (EAT), KL11SMF (EAT), KL11SVF (EAT), KL13AMF (EAT), KL13AVF (EAT), KL13SCF (EAT), KL13SMF (EAT), KL13SVF (EAT), KL21AMF (EAT), KL21AVF (EAT), KL21SCF (EAT), KL21SMF (EAT), KL21SVF (EAT), KL23AMF (EAT), KL23AVF (EAT), KL23SCF (EAT), KL23SMF (EAT), KL23SVF (EAT), S33930 (SQD), SL100 (SQD), SL1200P5 (SQD), SL1200P6 (SQD), SL1200P7 (SQD), SL250 (SQD), SL400 (SQD), SL800 (SQD), SL800M5 (SQD)
through-feed-lug-kit	AFL120 (GEA), AFL600 (GEA)
lug-kit	FCALK12 (GEA), FCALK13 (GEA), FCALK14 (GEA), FCALK15 (GEA), FCALK15LV (GEA), FCALK16 (GEA), FCALK16LV (GEA), FCALK218H (GEA), FCALK318H (GEA), TCAL19PD3 (GEA), TCAL28PD3 (GEA), TCAL40PD3 (GEA), TCALK2121 (GEA), TCALK2122 (GEA), TCALK2124 (GEA), TCALK2125 (GEA), TCALK261 (GEA), TCALK281 (GEA), TCALK291 (GEA), TCALK3121 (GEA), TCALK3122 (GEA), TCALK3124 (GEA), TCALK3125 (GEA), TCALK318 (GEA), TCALK324 (GEA), TCALK325 (GEA), TCALK329 (GEA), TCALK341 (GEA), TCALK343 (GEA), TCALK347 (GEA), TCALK361 (GEA), TCALK363 (GEA), TCALK381 (GEA), TCALK391 (GEA), TCLK265 (GEA), TCLK365 (GEA), TCOK265 (GEA), TCOK365 (GEA), 2TA2N8750 (SIE), 2TA3N8750 (SIE), 2TA4N8500 (SIE), 2TA4P8500 (SIE), 3TA1QR300 (SIE), 3TA2N8750 (SIE), 3TA3N8750 (SIE), 3TA4N8500 (SIE), 3TA4P8500 (SIE), 3TC1GG20 (SIE), 3TC1Q1 (SIE), 3TC1QR250 (SIE), BNK350N (SIE), CCM800K2 (SIE), CCM800K3 (SIE), CCN1200K2 (SIE), CCN1200K3 (SIE), TA1Q300 (SIE), AL150HD (SQD), AL175JD (SQD), AL250JD (SQD), AL400LA (SQD), CU150HD (SQD), CU250JD (SQD), CU400LA (SQD)
lug	NL300 (EAT), FCAL12 (GEA), FCAL13 (GEA), FCAL14 (GEA), FCAL15 (GEA), FCAL16 (GEA), TC012 (GEA), TC0121 (GEA), TC0131 (GEA), TC018 (GEA), TC024 (GEA), TC041 (GEA), TC043 (GEA), TC061 (GEA), TC063 (GEA), TC081A (GEA), TC091 (GEA), TCAL12 (GEA), TCAL121 (GEA), TCAL122 (GEA), TCAL124 (GEA), TCAL125 (GEA), TCAL12A (GEA), TCAL131 (GEA), TCAL14 (GEA), TCAL15 (GEA), TCAL18 (GEA), TCAL18LV (GEA), TCAL19PD1 (GEA), TCAL24 (GEA), TCAL25 (GEA), TCAL27 (GEA), TCAL28PD1 (GEA), TCAL29 (GEA), TCAL29LV (GEA), TCAL40PD1 (GEA), TCAL41 (GEA), TCAL43 (GEA), TCAL47 (GEA), TCAL61 (GEA), TCAL63 (GEA), TCAL81 (GEA), TCAL91 (GEA), TCLK43 (GEA), TCO124 (GEA), TCO125 (GEA), TCO29 (GEA), CCE125 (SIE), CCF250 (SIE), CCL600 (SIE), CCQ250 (SIE), LD1E060 (SIE), LD1E100 (SIE), LN1E100 (SIE), SA1E025 (SIE), TA1E6125 (SIE), TA1FD350A (SIE), TA1L6750 (SIE), TA1Q1 (SIE), TA2J630 (SIE), TA2J6500 (SIE), TA2K500 (SIE), TA2N750 (SIE), TA3K500 (SIE), TA4P750 (SIE), TA5P600 (SIE), TA6ED06 (SIE), TA6FD04 (SIE), TA6GG04 (SIE), TA6JD20 (SIE), TA6R600 (SIE), TC1ED6150 (SIE), TC1FD350 (SIE), TC1J6600 (SIE), TC1Q1 (SIE), TC2J6500 (SIE), TC2K500 (SIE), TC5R600 (SIE), 40251-016-51 (SQD), 40251-018-50 (SQD), 4025101851 (SQD), 40251-162-50 (SQD), 40251-287-50 (SQD), 40256-014-50 (SQD), 40256-034-50 (SQD), 40256-039-50 (SQD), 40560-270-50 (SQD), VCEL02114S1 (SQD), VCEL030516H1 (SQD), VCEL05012H1 (SQD), VCEL06012H1 (SQD), VCEL07512H1 (SQD), VCELC02114S1 (SQD), VCELC03038H1 (SQD), VCELC05012H1 (SQD), VCELC07512H1 (SQD)

Component type	Parts (OEM PN → page)
branch-connector-kit	1C96608 (EAT), 1C96609 (EAT), 2C11642 (EAT), KCDPCA (EAT), KCDPED225 (EAT), KCDPFB100 (EAT), KCDPFBP (EAT), KCDPKB (EAT), KCDPLA400 (EAT), KCDPLA600 (EAT), KCDPLB (EAT), KCDPLCL (EAT), KCDPMC (EAT), KCDPNBP (EAT), KCDPNC (EAT), KFDP4XT (EAT), KFDP5XT (EAT), KFDPB6X-2 (EAT), KFDPW11X-6 (EAT), KFDPW11X-8 (EAT), KFDPW15X-12 (EAT), KFDPW9X-4 (EAT), KPRL1BAB (EAT), KPRL2GHB (EAT), KPRL3ABA06 (EAT), KPRL3ABA06-1 (EAT), KPRL3ABA12 (EAT), KPRL3ABA12-1 (EAT), KPRL3ABA18 (EAT), KPRL3ABA18-1 (EAT), KPRL3ABA24 (EAT), KPRL3ABA24-1 (EAT), KPRL3AED2 (EAT), KPRL3AED3 (EAT), KPRL3AFD1 (EAT), KPRL3AFD2 (EAT), KPRL3AFD3 (EAT), KPRL3AGB06 (EAT), KPRL3AGB06-1 (EAT), KPRL3AGB12 (EAT), KPRL3AGB12-1 (EAT), KPRL3AGB18 (EAT), KPRL3AGB18-1 (EAT), KPRL3AGB24 (EAT), KPRL3AGB24-1 (EAT), KPRL3CA (EAT), KPRL3ED (EAT), KPRL3FD (EAT), KPRL3X21T (EAT), KPRL3X22 (EAT), KPRL3X22T (EAT), KPRL3X23 (EAT), KPRL3X23T (EAT), KPRL3XBA06 (EAT), KPRL3XBA06-1 (EAT), KPRL3XBA12 (EAT), KPRL3XBA12-1 (EAT), KPRL3XBA18 (EAT), KPRL3XBA18-1 (EAT), KPRL3XBA24 (EAT), KPRL3XBA24-1 (EAT), KPRL3XGB06 (EAT), KPRL3XGB06-1 (EAT), KPRL3XGB12 (EAT), KPRL3XGB12-1 (EAT), KPRL3XGB18 (EAT), KPRL3XGB18-1 (EAT), KPRL3XGB24 (EAT), KPRL3XGB24-1 (EAT), KPRL44X (EAT), KPRL45X (EAT), KPRL45X1 (EAT), KPRL45XS (EAT), KPRL4B6XS (EAT), KPRL4B6XT (EAT), KPRL4CA (EAT), KPRL4CKD (EAT), KPRL4CND (EAT), KPRL4ED (EAT), KPRL4ED2 (EAT), KPRL4FBP (EAT), KPRL4FD (EAT), KPRL4FD1 (EAT), KPRL4FD2 (EAT), KPRL4FDCL (EAT), KPRL4JDS (EAT), KPRL4JDT (EAT), KPRL4KDS (EAT), KPRL4KDT (EAT), KPRL4LAP (EAT), KPRL4LC (EAT), KPRL4LCL (EAT), KPRL4LD (EAT), KPRL4LG (EAT), KPRL4MC (EAT), KPRL4MD (EAT), KPRL4NBP (EAT), KPRL4NC (EAT), KPRL4ND (EAT), KPRL4W11X (EAT), KPRL4W15X (EAT), KPRL4W9X (EAT), KPRL4X12 (EAT), KPRL4X22 (EAT), KPRL4X32 (EAT), KPRL4X334S (EAT), KPRL4X334T (EAT), KPRL4X336 (EAT), KPRL4X34 (EAT), KPRL4X35 (EAT), ACSMKSG (GEA), ACSMKSK (GEA), ACTMKEB1P (GEA), ACTMKEB2P (GEA), ACTMKEB3P (GEA), ACTMKJD (GEA), ACTMKQD2P (GEA), ACTMKQD3P (GEA), ACTMKSE (GEA), ACTMKSF (GEA), ACTMKSG (GEA), AMCB2FGMFP (GEA), AMCB2FJFP (GEA), AMCB2FJFPTF (GEA), AMCB2GMFP (GEA), AMCB2KMFP (GEA), AMCB3FGMFP (GEA), AMCB3FJFP (GEA), AMCB3FJFPTF (GEA), AMCB3GMFP (GEA), AMCB3KMFP (GEA), AMCB3LBFP (GEA), AMCB4EBFP (GEA), AMCB4EYFP (GEA), AMCB4FBFP (GEA), AMCB4FDBFP (GEA), AMCB4FGBFP (GEA), AMCB4FJFP (GEA), AMCB4FJFPTF (GEA), AMCB4GBFP (GEA), AMCB4QDFP (GEA), AMCB4SEFP (GEA), AMCB6EBFP (GEA), AMCB6EYFP (GEA), AMCB6FBFP (GEA), AMCB6FDBFP (GEA), AMCB6FGBFP (GEA), AMCB6FJFP (GEA), AMCB6FJFPTF (GEA), AMCB6GBFP (GEA), AMCB6QDFP (GEA), ASPP6EY12D (GEA), ASPP6EY6D (GEA), ASPP6FB6D (GEA), ASPP6QB12D (GEA), ASPP6QB6D (GEA), ASPP6QD6D (GEA), ASPP6SE6D (GEA), ASPP6SF3S (GEA), ASPP6SG3S (GEA), NHB150PK (GEA), SF2DPK (GEA), SK12SPK (GEA), SK8SPK (GEA), TED1DPK (GEA), TEL1DPK (GEA), TF2DPK (GEA), TJ4DPK (GEA), TJ6DPK (GEA), TK12SPK (GEA), TK8SPK (GEA), TQ2DPK (GEA), 6BL2C (SIE), 6CLE2 (SIE), 6CLF1 (SIE), 6CLJ1 (SIE), 6CLL1 (SIE), 6E62 (SIE), 6F62 (SIE), 6JJ61 (SIE), 6JJ62 (SIE), 6LL61 (SIE), 6M61C (SIE), 6N61C (SIE), 6QJ2 (SIE), 6QR2 (SIE), 6SCJ1 (SIE), 6SCL1 (SIE), 6SCL61C (SIE), 6SJL1 (SIE), 6SLL1 (SIE), BBKB32 (SIE), BBKEB32 (SIE), BBKED32 (SIE), BBKGB32 (SIE), BBKNB32 (SIE), BBKQ1 (SIE), BBKQ2 (SIE), BBKQR1 (SIE), BBKQR2 (SIE), BBKVA4P2P3 (SIE), BBKVA5262P2S (SIE), BBKVA52P3T (SIE), MG1 (SIE), MG1D (SIE), NG1D (SIE), S3VA41T (SIE), S3VA41TD (SIE), S3VA41TDHD (SIE), S3VA52T (SIE), S3VA52TD (SIE), S3VA53T (SIE), S3VA53T2D (SIE), S3VA53TD (SIE), S3VA54T (SIE), S3VA54T2D (SIE), S3VA54TD (SIE), S3VA55TD (SIE), S3VA57TD (SIE), S3VA63T (SIE), S3VA63TD (SIE), S3VA64T (SIE), S3VA64TD (SIE), SBL (SIE), SBLBD (SIE), SCE (SIE), SCED (SIE), SCF (SIE), SCFD (SIE), SCJ (SIE), SCJD (SIE), SCL (SIE), SCLD (SIE), SDGD (SIE), SE6 (SIE), SE6D (SIE), SF6 (SIE), SF6D (SIE), SFG (SIE), SFGD (SIE), SGB2 (SIE), SGB2D (SIE), SJ1 (SIE), SJ1D (SIE), SJ2D (SIE), SJG (SIE), SJG1D (SIE), SJG2D (SIE), SL6 (SIE), SL6D (SIE), SLG (SIE), SLGD (SIE), SLM1D (SIE), SMND (SIE), SQR (SIE), SQRD (SIE), SSCJ (SIE), SSCJD (SIE), SSCL (SIE), SSCLD (SIE), SSJ1 (SIE), SSJ1D (SIE), SSL6 (SIE), SSL6D (SIE), SSMND (SIE)
breaker-mounting-kit	AMC2FGMFP (GEA), AMC2FJFP (GEA), AMC2FJFPTF (GEA), AMC2FLSFP (GEA), AMC2GMFP (GEA), AMC2JKFP (GEA), AMC2KMFP (GEA), AMC3FGMFP (GEA), AMC3FJFP (GEA), AMC3FJFPTF (GEA), AMC3FLSFP (GEA), AMC3GMFP (GEA), AMC3JKFP (GEA), AMC3KMFP (GEA), AMC4EBFP (GEA), AMC4EBSFP (GEA), AMC4FDBFP (GEA), AMC4FDSFP (GEA), AMC4FGBFP (GEA), AMC4FJFP (GEA), AMC4FJFPTF (GEA), AMC4FLSFP (GEA), AMC4GBFP (GEA), AMC4JKFP (GEA), AMC4QDFP (GEA), AMC4SEFP (GEA), AMC6EBFP (GEA), AMC6EBSFP (GEA), AMC6EYFP (GEA), AMC6FBFP (GEA), AMC6FDBFP (GEA), AMC6FDSPF (GEA), AMC6FGBFP (GEA), AMC6FJFP (GEA), AMC6FJFPTF (GEA), AMC6FLSFP (GEA), AMC6GBFP (GEA), AMC6JKFP (GEA), AMC6QBFP (GEA), AMC6QDFP (GEA), ASPFB12P (GEA), ASPFB3P (GEA), ASPTED3P (GEA), ASPTQD3P (GEA), QMB3300LA (SQD), QMB3400LA (SQD)
connector-strap	139C5702AQDG1 (GEA), 139C5702ASEG1 (GEA), 139C5702ASFG1 (GEA), 139C5702BQDG1 (GEA), 139C5702BSEG1 (GEA), 139C5702BSFG1 (GEA), 139C5702CQDG1 (GEA), 139C5702CSEG1 (GEA), 139C5702CSFG1 (GEA), 315A7046P7 (GEA), 315A7046P8 (GEA), 315A7046P9 (GEA), 315A7048P20 (GEA), 315A7049P10 (GEA), TKMC1 (GEA), P1CONACPHAL (SIE), P1CONACPHCU (SIE), P1CONBPHAL (SIE), P1CONBPHCU (SIE)
neutral-assembly	1C96645 (EAT), 1C96646 (EAT), 1C96647 (EAT), 1C96648 (EAT), 1C96649 (EAT), 1C96650 (EAT), 1C96651 (EAT), 1C96652 (EAT), 1C96653 (EAT), 1C96654 (EAT), 1C97022 (EAT), 42C4050 (EAT), 42C4051 (EAT), 42C4052 (EAT), 5158C03 (EAT), 5158C03G01 (EAT), 5158C03G02 (EAT), 5158C03G03 (EAT), 5158C03G04 (EAT), 5158C04G01 (EAT), 5PN1200A (EAT), 5PN1200C (EAT), 5PN800A (EAT), 5PN800C (EAT), BINA (EAT), ANK120D (GEA), ANK800D (GEA), ANKN120 (GEA), ANKN400 (GEA), NKA (GEA), NKA42 (GEA), NKA4FT (GEA), NKR (GEA), NKR4 (GEA), NKT (GEA), NKT4 (GEA), 2NLK42B (SIE), 2NLK54B (SIE), 42NLK54B (SIE), BNK2 (SIE), BNKP2EX1 (SIE), CNLK42B (SIE), CNLK54B (SIE), LNLK4X11B (SIE), LNLK5X12A (SIE), LNLK6X17B (SIE), LNLK7X18A (SIE), LNLK7X20B (SIE), LPP2NB01 (SIE)
ground-bar	2C11296 (EAT), 5158C05 (EAT), 5158C05G01 (EAT), 5158C05G02 (EAT), 5158C05G05 (EAT), 5158C05G06 (EAT), 5PG1200A (EAT), 5PG1200C (EAT), 6572C746G01 (EAT), AEG10 (GEA), AEG21 (GEA), AEG21S (GEA), AEG31S (GEA), AEG47 (GEA), AEG47S (GEA), EGS12 (GEA), TGL2 (GEA), TGL20 (GEA), ECGK (SIE), EGK (SIE), ICGK (SIE), IGK (SIE), PK32DGTA (SQD)
interior	CF16RJ63C36 (SQD), CF20R63C (SQD), CF20RJ63C (SQD), CF25R63C (SQD), CF30RJ63C (SQD)

Component type	Parts (OEM PN → page)
mounting-bracket	139C5500P81 (GEA), 139C5500P82 (GEA), 139C5500P83 (GEA), 139C5500P84 (GEA), 139C5700P86 (GEA), ASPAQLEBKT (GEA), P1DFS250AFT (SIE), P1DFS250ANFT (SIE), P1DFS400A (SIE), 4051749901 (SQD)
insulator	911E347P3 (GEA), 4052098601 (SQD)
barrier	PRLSEBFD (EAT), PRLSEBGHB (EAT), PRLSEBJD (EAT), PRLSEBLGKD (EAT), PRLSEBPD2 (EAT), PRLSEBPD3 (EAT), ASP25AD65KA (GEA), FGJS3 (GEA), SKPSHLD (GEA), TEDLS (GEA), TFKLS (GEA), TJKLS (GEA), BQFS2 (SIE), CLRSJL3 (SIE), JDTERMSHIELD (SIE), MDTERMSHIELD (SIE), NDTS (SIE), SEBKP1P2P3V1 (SIE), SEBKP2V1 (SIE), SEBKP2V2 (SIE), SEBKP2V3 (SIE), SEBKP2V4 (SIE), SEBKP2V5 (SIE), SEBKP2V6 (SIE), SEBKP2V7 (SIE), SEBKP3V1 (SIE), SEBKRP1V1 (SIE), SEBKRP1V2 (SIE), SEBKRP1V3 (SIE), SEBKRP1V4 (SIE), SEBKRP1V5 (SIE), SEBKRP1V6 (SIE), SEBKRP1V7 (SIE), SEBP4V1 (SIE), SEBP4V2 (SIE), SEBP4V3 (SIE), SEBP5V1 (SIE), SEBP5V2 (SIE), SEBP5V3 (SIE), SEBP5V4 (SIE), TSSG3A (SIE)
deadfront	1C96619 (EAT), 1C96620 (EAT), 1C96638 (EAT), 4176B51 (EAT), 4176B56 (EAT), 4176B57 (EAT), 4176B60 (EAT), 4176B61 (EAT), 4176B66 (EAT), 4176B67 (EAT), 4176B68 (EAT), 4176B69 (EAT), 4176B70 (EAT), 4176B79 (EAT), 4176B80 (EAT), 4178B08 (EAT), 4179B39 (EAT), 4179B40 (EAT), 4179B41 (EAT), 4179B42 (EAT), 4180B03 (EAT), 4180B04 (EAT), 4180B05 (EAT), 4180B61 (EAT), 4180B79 (EAT), 4180B91 (EAT), 4180B93 (EAT), 42C7980 (EAT), 42C7982 (EAT), 42C8055 (EAT), 42C8072 (EAT), 42C8073 (EAT), 42C8076 (EAT), 42C8077 (EAT), 42C8078 (EAT), 42C8079 (EAT), 42C8080 (EAT), 42C8081 (EAT), 42C8082 (EAT), 5156C09 (EAT), 5156C10 (EAT), 6559C59 (EAT), 6574C74 (EAT), DFK07 (SIE), DFK08 (SIE), DFK1 (SIE)
filler-plate	3456B35H01 (EAT), 3456B99H01 (EAT), 3456B99H05 (EAT), 4176B72 (EAT), 4178B06H01 (EAT), 4180B08 (EAT), 4180B52H01 (EAT), 42C8083H01 (EAT), 5155C62H01 (EAT), 5PFP1S (EAT), 5PFP1T (EAT), 5PFP2S (EAT), 5PFP2T (EAT), 5PFP3S (EAT), 5PFP3T (EAT), 5PFP4S (EAT), 5PFP4T (EAT), 5PFP5S (EAT), 5PFP5T (EAT), 5PFP6S (EAT), 5PFP6T (EAT), 6554C01 (EAT), 6554C02 (EAT), 6555C40H01 (EAT), 6555C41H01 (EAT), BRFP (EAT), BWFP (EAT), KCDP_X (EAT), KFDP_X (EAT), P41X25 (EAT), PRXP4PD2FILL1 (EAT), 139C5362P2 (GEA), 139C5503P103 (GEA), 139C5503P129 (GEA), 139C5503P64 (GEA), 139C5503P77 (GEA), 139C5503P90 (GEA), 75C145005G703 (GEA), 75C145005G711 (GEA), 75C145005G715 (GEA), AFP2FBD (GEA), AFP2QDD (GEA), AFP2TED (GEA), AFP3EYD (GEA), AFP3FBD (GEA), AFP3QDD (GEA), AFP3SED (GEA), AFP3SFD (GEA), AFP3SFS (GEA), AFP3TFD (GEA), AFP3TFS (GEA), AFP4FGD (GEA), AFP4FGS (GEA), AFP4SGD (GEA), AFP4SGS (GEA), AFP5LCS (GEA), AFP6SKS (GEA), AMCB6TEDL (GEA), APP1 (GEA), APP1S (GEA), APP1W (GEA), APP2 (GEA), APP2S (GEA), APP2W (GEA), APP3 (GEA), APP3S (GEA), APP3W (GEA), APP4 (GEA), APP4S (GEA), APP4W (GEA), APP5 (GEA), APP5S (GEA), APP5W (GEA), APP6 (GEA), APP6S (GEA), APP6W (GEA), CCBFP1 (GEA), CCBFP3 (GEA), CCBFP5 (GEA), QMRFP1 (GEA), QMRFP2 (GEA), QMRFP5 (GEA), SCPFP1 (GEA), SCPFP2 (GEA), SCPFP3 (GEA), SCPFP5 (GEA), TEDFP1 (GEA), TQLFP1 (GEA), 6FPB01 (SIE), 6FPB02 (SIE), 6FPB03 (SIE), 6FPB05 (SIE), 6FPB10 (SIE), 6FPB15 (SIE), DFFP01B (SIE), DFFP01C (SIE), DFFP1A (SIE), DFFP3 (SIE), DFFP6 (SIE), DFFPED01 (SIE), DFFPFD01 (SIE), DFFPJD01 (SIE), DFFPJD02 (SIE), DFFPQJ01 (SIE), DFFPQJ02 (SIE), DFFPVA41A (SIE), DFFPVA5262A (SIE), DFFPVA5262P2A (SIE), DFFPVA5262P2B (SIE), DFFPVA5363A (SIE), DFP3AP01 (SIE), EBF1 (SIE), MBKQRFK (SIE), P2QRFP01 (SIE), QF3 (SIE), HLN1BL (SQD), HLN4BL (SQD), HLN4EBL (SQD), HLW1BL (SQD), HLW4BL (SQD), HLW4EBL (SQD), HNM1BL (SQD), HNM4BL (SQD), QMB15BLW (SQD), QMB1BLW (SQD), QMB3BLW (SQD), QMB6BLW (SQD), QW1BL (SQD), QW3BL (SQD)
trim	0080429 (EAT), 114C247G01 (EAT), 1A32258H03 (EAT), 1A85194G01 (EAT), 3457B16G01 (EAT), 5155C81G01 (EAT), 5155C81G03 (EAT), 8450C62H39 (EAT), K80133 (EAT), K80429 (EAT), K80522 (EAT)
box/enclosure	EWK1 (SIE), EWK1B (SIE), EWK2 (SIE), EWK2B (SIE), EWK3 (SIE)
hardware-kit	2C11641G02 (EAT), 4180B62 (EAT), 5078A98 (EAT), 7494A11G02 (EAT), KCDPFB100-H (EAT), 139C5720G3 (GEA), 139C5720G6 (GEA), 139C5720G9 (GEA), AHKBE1 (GEA), AHKBF1 (GEA), AHKBFB1 (GEA), AHKBFD1 (GEA), AHKBFG1 (GEA), AHKBG1 (GEA), AHKBQ1 (GEA), AHKE1 (GEA), AHKEL1 (GEA), AHKF1 (GEA), AHKFD1 (GEA), AHKFG1 (GEA), AHKG1 (GEA), AHKJ1 (GEA), AHKLB1 (GEA), AHKQ1 (GEA), BNDKT (GEA), BNDKT6 (GEA), BBKVA5262P2HW (SIE), BBKVA52P3HW (SIE), BK1A (SIE), IMK1 (SIE), MBKBFA (SIE), P2BK1 (SIE), P2BK2 (SIE), P2BK3 (SIE), P3BK1 (SIE), S3VA52PR (SIE), S3VA53PR (SIE), TNKG3 (SIE), 4028343250 (SQD), 4028343550 (SQD), 4028343750 (SQD), 8000602003 (SQD), 8023317701 (SQD)
fastener	414A380G01 (EAT), 414A380G02 (EAT), 42C1129H02 (EAT), 5081A08G02 (EAT), 5081A09G02 (EAT), 5157C83G06 (EAT), 7499A48G04 (EAT), 8712C73H01 (EAT), 3VA9233-0QA00 (SIE), 3VA9243-0QA00 (SIE), 3VA9473-0QA00 (SIE), P1SCRWS (SIE), 2142720241 (SQD), 21427-20401 (SQD), 2150720200 (SQD), 2152620361 (SQD), 21590-20241 (SQD), 21593-20100 (SQD), 2271020200 (SQD), 2300100200 (SQD), 2330241601 (SQD), 2342702001 (SQD), 2342702400 (SQD), 2370100200 (SQD), 4020506501 (SQD), 8000602001 (SQD), 8011417101 (SQD), PKDFSCREW (SQD)
conversion-kit	5PCGBLD600S (EAT), 5PCGBLUG1200T (EAT), 5PCGBLUG400S (EAT), 5PCGBLUG600S (EAT), 5PCGBLUG800S (EAT), 5PCGBMD800T (EAT), 5PCGBND1200T (EAT), KCDPDK (EAT), KCDPEHD (EAT), KCDPFD (EAT), KCDPFDB (EAT), KCDPHKD (EAT), KCDPJD (EAT), KCDPJDB (EAT), KCDPKD (EAT), KCDPKDB (EAT), KCDPLD (EAT), KCDPMDL (EAT), KCDPND (EAT), KFDPBS324R (EAT), KFDPBS364R (EAT), KFDPW325R (EAT), KFDPW326R (EAT), KFDPW365R (EAT), KFDPW366R (EAT), KFDPW367 (EAT), KFDPW368 (EAT), KFDPWT3211R (EAT), KFDPWT3222R (EAT), KFDPWT3233R (EAT), KFDPWT3611R (EAT), KFDPWT3622R (EAT), KFDPWT3633R (EAT), TAD3 (EAT), APHBL (GEA), APHBQ (GEA), ASP2PTFJ3P (GEA), ASP2PTQD3P (GEA), BBKQRP1FK (SIE), BBKQRP2FK (SIE), MBKVA5363JD (SIE), QMB306EX (SQD), QMB306LEX (SQD), QMB310EX (SQD), QMB310LEX (SQD), QMB320EX (SQD), QMB600T6 (SQD), QMB800T6 (SQD)
spd-kit	QMB1IMA_ (SQD), QMB2IMA_ (SQD), QMB3IMA_ (SQD), QMB4IMA_ (SQD), QMB8IMA_ (SQD), TVS12RMU (SQD)

Component type	Parts (OEM PN → page)
breaker-accessory	286A8066G1 (GEA), 789A448G1 (GEA), 789A448G2 (GEA), 789A448G3 (GEA), FGH1LCK (GEA), FGJN3 (GEA), SE3LCK (GEA), SE3LCKL (GEA), SF3LCK (GEA), SG1BCK (GEA), SG1LCK (GEA), SGBCS1 (GEA), SGBCS2 (GEA), SGLVK (GEA), SK1LCK (GEA), SKLVK (GEA), TEF1 (GEA), TEF2 (GEA), TEF3 (GEA), TEF4 (GEA), TFK1 (GEA), TFK2 (GEA), TJLVK (GEA), TKM11 (GEA), TKM12 (GEA), TQDFM1 (GEA), RS2641 (SIE), RS2642 (SIE), RS2643 (SIE), RS2644 (SIE), RS4755 (SIE), RS4756 (SIE), RS5773 (SIE), RS5774 (SIE), RS5783 (SIE), RS5784 (SIE), RS5785 (SIE), RS5786 (SIE), RS5787 (SIE), RS5788 (SIE), HRK1020 (SQD), HRK30 (SQD), QMB100R (SQD), QMB200EK (SQD), QMB300EK (SQD), QMB36R (SQD), QMB4060R (SQD), QMB60R (SQD), QMB610EK (SQD)
handle-lock	1256C42G01 (EAT), 1256C42G02 (EAT), BHT (EAT)
padlock-attachment	BRLW (EAT), BRLW1 (EAT)
other	APN48 (GEA), APN84 (GEA), SQRC (SIE), 4052017302 (SQD), 4052021450 (SQD), 4052021650 (SQD), 4052031850 (SQD), 4052036750 (SQD), 4052085601 (SQD), 50552-108-01 (SQD), 80031-024-02 (SQD), HQO306 (SQD), QMB210T (SQD), QMB221HW (SQD), QMB221TW (SQD), QMB222HW (SQD), QMB222TW (SQD), QMB223HW (SQD), QMB223TW (SQD), QMB2240 (SQD), QMB224W (SQD), QMB225W (SQD), QMB225WT3 (SQD), QMB261HW (SQD), QMB261TW (SQD), QMB262HW (SQD), QMB262TW (SQD), QMB263HW (SQD), QMB263TW (SQD), QMB264W (SQD), QMB303T (SQD), QMB306T (SQD), QMB310T (SQD), QMB321HW (SQD), QMB321TW (SQD), QMB322HW (SQD), QMB322TW (SQD), QMB323HW (SQD), QMB323TD (SQD), QMB323TW (SQD), QMB3240 (SQD), QMB324W (SQD), QMB325W (SQD), QMB325WT3 (SQD), QMB3260 (SQD), QMB326W (SQD), QMB326WT3 (SQD), QMB327WT3 (SQD), QMB3606T (SQD), QMB361HW (SQD), QMB361TW (SQD), QMB3620 (SQD), QMB362HW (SQD), QMB362T (SQD), QMB362T21W (SQD), QMB362TW (SQD), QMB363HW (SQD), QMB363T31W (SQD), QMB363T32W (SQD), QMB363TW (SQD), QMB364 (SQD), QMB3640 (SQD), QMB364W (SQD), QMB365W (SQD), QMB365WT6 (SQD), QMB366W (SQD), QMB367W (SQD), QMB368W (SQD), QMJ361T (SQD), QMJ362T (SQD), QMJ363H (SQD), QMJ363T (SQD), QMJ364H (SQD), QMJ364T (SQD), QMJ365 (SQD), QMJ366 (SQD)

9.6 Rating and pole index

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00291	2C11642	Sum of horizontally twin-mounted breakers shall not exceed 140 A	—	—	115
EDH-EAT-00133	KB11AFB	100 A max	2-pole (single-phase A/C)	—	60
EDH-EAT-00132	KB11AFT	100 A max	2-pole (single-phase A/C)	—	60
EDH-EAT-00135	KB11SFB	100 A max	2-pole (single-phase A/C)	—	61
EDH-EAT-00134	KB11SFT	100 A max	2-pole (single-phase A/C)	—	61
EDH-EAT-00129	KB13AFB	100 A max	3-pole (A/B/C)	—	62
EDH-EAT-00128	KB13AFT	100 A max	3-pole (A/B/C)	—	62
EDH-EAT-00131	KB13SFB	100 A max	3-pole (A/B/C)	—	63
EDH-EAT-00130	KB13SFT	100 A max	3-pole (A/B/C)	—	63
EDH-EAT-00141	KB21AFB	225 A max	2-pole (single-phase A/C)	—	64
EDH-EAT-00140	KB21AFT	225 A max	2-pole (single-phase A/C)	—	64
EDH-EAT-00143	KB21SFB	225 A max	2-pole (single-phase A/C)	—	65
EDH-EAT-00142	KB21SFT	225 A max	2-pole (single-phase A/C)	—	65
EDH-EAT-00137	KB23AFB	225 A max	3-pole (A/B/C)	—	66
EDH-EAT-00136	KB23AFT	225 A max	3-pole (A/B/C)	—	66
EDH-EAT-00139	KB23SFB	225 A max	3-pole (A/B/C)	—	67
EDH-EAT-00138	KB23SFT	225 A max	3-pole (A/B/C)	—	67
EDH-EAT-00149	KB41AJB	400 A class (frame)	2-pole (single-phase A/C)	—	68

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00148	KB41AJT	400 A class (frame)	2-pole (single-phase A/C)	—	68
EDH-EAT-00157	KB41AKB	400 A class (frame)	2-pole (single-phase A/C)	—	69
EDH-EAT-00156	KB41AKT	400 A class (frame)	2-pole (single-phase A/C)	—	69
EDH-EAT-00151	KB41SJB	400 A class (frame)	2-pole (single-phase A/C)	—	70
EDH-EAT-00150	KB41SJT	400 A class (frame)	2-pole (single-phase A/C)	—	70
EDH-EAT-00159	KB41SKB	400 A class (frame)	2-pole (single-phase A/C)	—	71
EDH-EAT-00158	KB41SKT	400 A class (frame)	2-pole (single-phase A/C)	—	71
EDH-EAT-00145	KB43AJB	400 A class (frame)	3-pole (A/B/C)	—	72
EDH-EAT-00144	KB43AJT	400 A class (frame)	3-pole (A/B/C)	—	72
EDH-EAT-00153	KB43AKB	400 A class (frame)	3-pole (A/B/C)	—	73
EDH-EAT-00152	KB43AKT	400 A class (frame)	3-pole (A/B/C)	—	73
EDH-EAT-00147	KB43SJB	400 A class (frame)	3-pole (A/B/C)	—	74
EDH-EAT-00146	KB43SJT	400 A class (frame)	3-pole (A/B/C)	—	74
EDH-EAT-00155	KB43SKB	400 A class (frame)	3-pole (A/B/C)	—	75
EDH-EAT-00154	KB43SKT	400 A class (frame)	3-pole (A/B/C)	—	75
EDH-EAT-00004	KCDPCA	225 A frame	3	—	20
EDH-EAT-00002	KCDPED225	225 A frame	3	—	21
EDH-EAT-00001	KCDPFB100	100 A maximum	3	—	21
EDH-EAT-00003	KCDPFBP	100 A (FB-P 15-100 A)	3	—	22
EDH-EAT-00005	KCDPKB	250 A frame	3	—	23
EDH-EAT-00007	KCDPLA400	400 A (LA-P 70-400 A)	3	—	23
EDH-EAT-00008	KCDPLA600	600 A frame	3	—	24
EDH-EAT-00006	KCDPLB	400 A frame	3	—	25
EDH-EAT-00009	KCDPLCL	LCL 125-400 A	3	—	25
EDH-EAT-00010	KCDPMC	800 A frame	3	—	26
EDH-EAT-00012	KCDPNBP	800 A (NB-P 300-800 A)	3	—	27
EDH-EAT-00011	KCDPNC	1200 A frame; not rated for 100 percent breakers	3	—	27
EDH-EAT-00028	KFDP4XT	—	3	—	221
EDH-EAT-00029	KFDP5XT	—	3	—	221
EDH-EAT-00030	KFDPB6X-2	—	3	—	222
EDH-EAT-00042	KFDPBS324R	200 A	3	240 V	45
EDH-EAT-00043	KFDPBS364R	200 A	3	600 V	46
EDH-EAT-00032	KFDPW11X-6	—	3	—	222
EDH-EAT-00033	KFDPW11X-8	—	3	—	223
EDH-EAT-00034	KFDPW15X-12	—	3	—	223
EDH-EAT-00044	KFDPW325R	400 A	3	240 V	46
EDH-EAT-00046	KFDPW326R	600 A	3	240 V	46
EDH-EAT-00045	KFDPW365R	400 A	3	600 V	47
EDH-EAT-00047	KFDPW366R	600 A	3	600 V	47
EDH-EAT-00048	KFDPW367	800 A	3	240/600 V	47
EDH-EAT-00049	KFDPW368	1200 A	3	240/600 V	48

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00031	KFDPW9X-4	—	3	—	224
EDH-EAT-00036	KFDPWT3211R	30 A	3	240 V	48
EDH-EAT-00038	KFDPWT3222R	60 A	3	240 V	48
EDH-EAT-00040	KFDPWT3233R	100 A	3	240 V	49
EDH-EAT-00037	KFDPWT3611R	30 A	3	600 V	49
EDH-EAT-00039	KFDPWT3622R	60 A	3	600 V	49
EDH-EAT-00041	KFDPWT3633R	100 A	3	600 V	50
EDH-EAT-00194	KL11AMF	100 A	—	—	108
EDH-EAT-00198	KL11AMO	100 A	—	—	80
EDH-EAT-00190	KL11AMS	100 A	—	—	80
EDH-EAT-00206	KL11AVF	100 A	—	—	108
EDH-EAT-00210	KL11AVO	100 A	—	—	80
EDH-EAT-00202	KL11AVS	100 A	—	—	81
EDH-EAT-00215	KL11SCF	100 A	—	—	109
EDH-EAT-00217	KL11SCO	100 A	—	—	81
EDH-EAT-00213	KL11SCS	100 A	—	—	81
EDH-EAT-00195	KL11SMF	100 A	—	—	109
EDH-EAT-00199	KL11SMO	100 A	—	—	82
EDH-EAT-00191	KL11SMS	100 A	—	—	82
EDH-EAT-00207	KL11SVF	100 A	—	—	109
EDH-EAT-00211	KL11SVO	100 A	—	—	82
EDH-EAT-00203	KL11SVS	100 A	—	—	83
EDH-EAT-00192	KL13AMF	100 A	—	—	110
EDH-EAT-00196	KL13AMO	100 A	—	—	83
EDH-EAT-00188	KL13AMS	100 A	—	—	83
EDH-EAT-00204	KL13AVF	100 A	—	—	110
EDH-EAT-00208	KL13AVO	100 A	—	—	84
EDH-EAT-00200	KL13AVS	100 A	—	—	84
EDH-EAT-00214	KL13SCF	100 A	—	—	110
EDH-EAT-00216	KL13SCO	100 A	—	—	84
EDH-EAT-00212	KL13SCS	100 A	—	—	85
EDH-EAT-00193	KL13SMF	100 A	—	—	111
EDH-EAT-00197	KL13SMO	100 A	—	—	85
EDH-EAT-00189	KL13SMS	100 A	—	—	85
EDH-EAT-00205	KL13SVF	100 A	—	—	111
EDH-EAT-00209	KL13SVO	100 A	—	—	86
EDH-EAT-00201	KL13SVS	100 A	—	—	86
EDH-EAT-00224	KL21AMF	225 A	—	—	111
EDH-EAT-00228	KL21AMO	225 A	—	—	86
EDH-EAT-00220	KL21AMS	225 A	—	—	87
EDH-EAT-00236	KL21AVF	225 A	—	—	112
EDH-EAT-00240	KL21AVO	225 A	—	—	87
EDH-EAT-00232	KL21AVS	225 A	—	—	87
EDH-EAT-00245	KL21SCF	225 A	—	—	112
EDH-EAT-00247	KL21SCO	225 A	—	—	88
EDH-EAT-00243	KL21SCS	225 A	—	—	88
EDH-EAT-00225	KL21SMF	225 A	—	—	112
EDH-EAT-00229	KL21SMO	225 A	—	—	88
EDH-EAT-00221	KL21SMS	225 A	—	—	89
EDH-EAT-00237	KL21SVF	225 A	—	—	113
EDH-EAT-00241	KL21SVO	225 A	—	—	89
EDH-EAT-00233	KL21SVS	225 A	—	—	89

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00222	KL23AMF	225 A	—	—	113
EDH-EAT-00226	KL23AMO	225 A	—	—	90
EDH-EAT-00218	KL23AMS	225 A	—	—	90
EDH-EAT-00234	KL23AVF	225 A	—	—	113
EDH-EAT-00238	KL23AVO	225 A	—	—	90
EDH-EAT-00230	KL23AVS	225 A	—	—	91
EDH-EAT-00244	KL23SCF	225 A	—	—	114
EDH-EAT-00246	KL23SCO	225 A	—	—	91
EDH-EAT-00242	KL23SCS	225 A	—	—	91
EDH-EAT-00223	KL23SMF	225 A	—	—	114
EDH-EAT-00227	KL23SMO	225 A	—	—	92
EDH-EAT-00219	KL23SMS	225 A	—	—	92
EDH-EAT-00235	KL23SVF	225 A	—	—	114
EDH-EAT-00239	KL23SVO	225 A	—	—	92
EDH-EAT-00231	KL23SVS	225 A	—	—	93
EDH-EAT-00254	KL41AMO	400 A	—	—	93
EDH-EAT-00250	KL41AMS	400 A	—	—	93
EDH-EAT-00262	KL41AVO	400 A	—	—	94
EDH-EAT-00258	KL41AVS	400 A	—	—	94
EDH-EAT-00265	KL41SCO	400 A	—	—	94
EDH-EAT-00255	KL41SMO	400 A	—	—	95
EDH-EAT-00251	KL41SMS	400 A	—	—	95
EDH-EAT-00263	KL41SVO	400 A	—	—	95
EDH-EAT-00259	KL41SVS	400 A	—	—	96
EDH-EAT-00252	KL43AMO	400 A	—	—	96
EDH-EAT-00248	KL43AMS	400 A	—	—	96
EDH-EAT-00260	KL43AVO	400 A	—	—	97
EDH-EAT-00256	KL43AVS	400 A	—	—	97
EDH-EAT-00264	KL43SCO	400 A	—	—	97
EDH-EAT-00253	KL43SMO	400 A	—	—	98
EDH-EAT-00249	KL43SMS	400 A	—	—	98
EDH-EAT-00261	KL43SVO	400 A	—	—	98
EDH-EAT-00257	KL43SVS	400 A	—	—	99
EDH-EAT-00275	KL61CMO	600 A	—	—	99
EDH-EAT-00269	KL61CMS	600 A	—	—	99
EDH-EAT-00287	KL61CVO	600 A	—	—	100
EDH-EAT-00281	KL61CVS	600 A	—	—	100
EDH-EAT-00276	KL61SMO	600 A	—	—	100
EDH-EAT-00270	KL61SMS	600 A	—	—	101
EDH-EAT-00288	KL61SVO	600 A	—	—	101
EDH-EAT-00282	KL61SVS	600 A	—	—	101
EDH-EAT-00277	KL61TMO	600 A	—	—	102
EDH-EAT-00271	KL61TMS	600 A	—	—	102
EDH-EAT-00289	KL61TVO	600 A	—	—	102
EDH-EAT-00283	KL61TVS	600 A	—	—	103
EDH-EAT-00272	KL63CMO	600 A	—	—	103
EDH-EAT-00266	KL63CMS	600 A	—	—	103
EDH-EAT-00284	KL63CVO	600 A	—	—	104
EDH-EAT-00278	KL63CVS	600 A	—	—	104
EDH-EAT-00273	KL63SMO	600 A	—	—	104
EDH-EAT-00267	KL63SMS	600 A	—	—	105
EDH-EAT-00285	KL63SVO	600 A	—	—	105

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00279	KL63SVS	600 A	—	—	105
EDH-EAT-00274	KL63TMO	600 A	—	—	106
EDH-EAT-00268	KL63TMS	600 A	—	—	106
EDH-EAT-00286	KL63TVO	600 A	—	—	106
EDH-EAT-00280	KL63TVS	600 A	—	—	107
EDH-EAT-00050	KPRL1BAB	Maximum amperes connected to any one connector cannot exceed 140 A	—	—	52
EDH-EAT-00051	KPRL2GHB	Maximum 140 A connected to any one connector	—	—	53
EDH-EAT-00309	KPRL3ABA06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	148
EDH-EAT-00310	KPRL3ABA06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	149
EDH-EAT-00311	KPRL3ABA12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	149
EDH-EAT-00312	KPRL3ABA12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	150
EDH-EAT-00313	KPRL3ABA18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	150
EDH-EAT-00314	KPRL3ABA18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	151
EDH-EAT-00315	KPRL3ABA24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	151
EDH-EAT-00316	KPRL3ABA24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	152
EDH-EAT-00317	KPRL3AGB06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	154
EDH-EAT-00318	KPRL3AGB06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	154
EDH-EAT-00319	KPRL3AGB12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	155
EDH-EAT-00320	KPRL3AGB12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	155
EDH-EAT-00321	KPRL3AGB18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	156
EDH-EAT-00322	KPRL3AGB18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	156
EDH-EAT-00323	KPRL3AGB24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	157
EDH-EAT-00324	KPRL3AGB24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	157
EDH-EAT-00293	KPRL3XBA06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	171
EDH-EAT-00294	KPRL3XBA06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	172

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00295	KPRL3XBA12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	172
EDH-EAT-00296	KPRL3XBA12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	172
EDH-EAT-00297	KPRL3XBA18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	173
EDH-EAT-00298	KPRL3XBA18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	173
EDH-EAT-00299	KPRL3XBA24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	173
EDH-EAT-00300	KPRL3XBA24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	174
EDH-EAT-00301	KPRL3XGB06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	174
EDH-EAT-00302	KPRL3XGB06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	174
EDH-EAT-00303	KPRL3XGB12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	175
EDH-EAT-00304	KPRL3XGB12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	175
EDH-EAT-00305	KPRL3XGB18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	175
EDH-EAT-00306	KPRL3XGB18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	176
EDH-EAT-00307	KPRL3XGB24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	176
EDH-EAT-00308	KPRL3XGB24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	176
EDH-EAT-00103	KPRL4CA	—	2, 3	—	183
EDH-EAT-00086	KPRL4CKD	—	2, 3	—	184
EDH-EAT-00092	KPRL4CND	—	3	—	185
EDH-EAT-00081	KPRL4ED	—	3	—	185
EDH-EAT-00078	KPRL4ED2	—	2	—	186
EDH-EAT-00080	KPRL4FBP	—	3	—	187
EDH-EAT-00079	KPRL4FD	225 A	3	—	187
EDH-EAT-00076	KPRL4FD1	—	1 (two sets of twin-mounted single-pole)	—	188
EDH-EAT-00077	KPRL4FD2	—	2	—	189
EDH-EAT-00102	KPRL4FDCL	—	3	—	190
EDH-EAT-00082	KPRL4JDS	—	2, 3	—	190
EDH-EAT-00083	KPRL4JDT	—	2, 3	—	191
EDH-EAT-00084	KPRL4KDS	—	2, 3	—	192
EDH-EAT-00085	KPRL4KDT	—	2, 3	—	192
EDH-EAT-00088	KPRL4LAP	—	2, 3	—	193
EDH-EAT-00104	KPRL4LC	—	3	—	194
EDH-EAT-00087	KPRL4LCL	—	2, 3	—	194

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00089	KPRL4LD	—	2, 3	—	195
EDH-EAT-00105	KPRL4LG	—	3	—	196
EDH-EAT-00090	KPRL4MC	—	2, 3	—	196
EDH-EAT-00107	KPRL4MD	—	3	—	197
EDH-EAT-00091	KPRL4NBP	—	2, 3	—	198
EDH-EAT-00106	KPRL4NC	—	3	—	198
EDH-EAT-00093	KPRL4ND	—	2, 3	—	199
EDH-EAT-00094	KPRL4X12	—	1 (two sets of twin-mounted single-pole)	—	201
EDH-EAT-00095	KPRL4X22	—	2	—	202
EDH-EAT-00096	KPRL4X32	—	3	—	203
EDH-EAT-00097	KPRL4X334S	—	3	—	203
EDH-EAT-00098	KPRL4X334T	—	3	—	204
EDH-EAT-00099	KPRL4X336	—	3	—	205
EDH-EAT-00100	KPRL4X34	—	3	—	205
EDH-EAT-00101	KPRL4X35	—	3	—	206
EDH-EAT-00414	PRXP4PD2FILL1	—	1	—	209
EDH-GEA-00027	315A7049P10	200 A (per description)	—	—	321
EDH-GEA-00254	ACSMKSG	400/800 A max	—	—	332
EDH-GEA-00255	ACSMKSK	800/1200 A max	—	—	332
EDH-GEA-00246	ACTMKEB1P	150 A max	—	—	332
EDH-GEA-00247	ACTMKEB2P	150 A max	—	—	333
EDH-GEA-00248	ACTMKEB3P	150 A max	—	—	333
EDH-GEA-00252	ACTMKJD	400 A max	—	—	333
EDH-GEA-00250	ACTMKQD2P	225 A max	—	—	334
EDH-GEA-00251	ACTMKQD3P	225 A max	—	—	334
EDH-GEA-00245	ACTMKSE	150 A max	—	—	334
EDH-GEA-00249	ACTMKSF	250 A max	—	—	335
EDH-GEA-00253	ACTMKSG	400/600 A max	—	—	335
EDH-GEA-00243	AFL120	800/1200 A	—	—	341
EDH-GEA-00242	AFL600	250/400/600 A	—	—	341
EDH-GEA-00181	AMC2FGMFP	600 A max breaker	—	—	359
EDH-GEA-00179	AMC2FJFP	250 A max breaker	—	—	359
EDH-GEA-00178	AMC2FJFPTF	225 A max breaker	—	—	360
EDH-GEA-00184	AMC2FLSFP	250 A max breaker	—	—	360
EDH-GEA-00182	AMC2GMFP	600 A max breaker	—	—	361
EDH-GEA-00180	AMC2JKFP	400/600 A max breaker	—	—	362
EDH-GEA-00183	AMC2KMFP	1200 A max breaker	—	—	362
EDH-GEA-00162	AMC3FGMFP	600 A max breaker	—	—	363
EDH-GEA-00160	AMC3FJFP	250 A max breaker	—	—	363
EDH-GEA-00159	AMC3FJFPTF	225 A max breaker	—	—	364
EDH-GEA-00165	AMC3FLSFP	250 A max breaker	—	—	364
EDH-GEA-00163	AMC3GMFP	600 A max breaker	—	—	365
EDH-GEA-00161	AMC3JKFP	400/600 A max breaker	—	—	365
EDH-GEA-00164	AMC3KMFP	1200 A max breaker	—	—	366
EDH-GEA-00167	AMC4EBFP	150 A max breaker	—	—	366
EDH-GEA-00176	AMC4EBSFP	150 A max breaker	—	—	367
EDH-GEA-00166	AMC4FDBFP	100 A max breaker	—	—	367
EDH-GEA-00175	AMC4FDSFP	100 A max breaker	—	—	368
EDH-GEA-00173	AMC4FGBFP	600 A max breaker	—	—	368
EDH-GEA-00171	AMC4FJFP	250 A max breaker	—	—	369
EDH-GEA-00170	AMC4FJFPTF	225 A max breaker	—	—	370

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00177	AMC4FLSFP	250 A max breaker	—	—	370
EDH-GEA-00174	AMC4GBFP	600 A max breaker	—	—	371
EDH-GEA-00172	AMC4JKFP	400/600 A max breaker	—	—	371
EDH-GEA-00169	AMC4QDFP	225 A max breaker	—	—	372
EDH-GEA-00168	AMC4SEFP	150 A max breaker	—	—	373
EDH-GEA-00149	AMC6EBFP	150 A max breaker	—	—	373
EDH-GEA-00157	AMC6EBSFP	150 A max breaker	—	—	374
EDH-GEA-00146	AMC6EYFP	100 A max breaker	—	—	374
EDH-GEA-00147	AMC6FBFP	100 A max breaker	—	—	375
EDH-GEA-00148	AMC6FDBFP	100 A max breaker	—	—	375
EDH-GEA-00156	AMC6FDSPF	100 A max breaker	—	—	376
EDH-GEA-00154	AMC6FGBFP	600 A max breaker	—	—	376
EDH-GEA-00152	AMC6FJFP	250 A max breaker	—	—	377
EDH-GEA-00151	AMC6FJFPTF	225 A max breaker	—	—	377
EDH-GEA-00158	AMC6FLSFP	250 A max breaker	—	—	378
EDH-GEA-00155	AMC6GBFP	600 A max breaker	—	—	378
EDH-GEA-00153	AMC6JKFP	400/600 A max breaker	—	—	379
EDH-GEA-00145	AMC6QBFP	100 A max breaker	—	—	379
EDH-GEA-00150	AMC6QDFP	225 A max breaker	—	—	380
EDH-GEA-00119	AMCB2FGMFP	—	2	—	342
EDH-GEA-00117	AMCB2FJFP	—	2	—	343
EDH-GEA-00118	AMCB2FJFPTF	—	2	—	343
EDH-GEA-00120	AMCB2GMFP	—	2	—	344
EDH-GEA-00126	AMCB2KMFP	—	2	—	344
EDH-GEA-00123	AMCB3FGMFP	—	3	—	345
EDH-GEA-00121	AMCB3FJFP	—	3	—	345
EDH-GEA-00122	AMCB3FJFPTF	—	3	—	346
EDH-GEA-00124	AMCB3GMFP	—	3	—	346
EDH-GEA-00127	AMCB3KMFP	—	3	—	347
EDH-GEA-00125	AMCB3LBFP	—	2	—	347
EDH-GEA-00098	AMCB4EBFP	—	2	—	348
EDH-GEA-00099	AMCB4EYFP	—	2	—	348
EDH-GEA-00100	AMCB4FBFP	—	2	—	349
EDH-GEA-00101	AMCB4FDBFP	—	2	—	349
EDH-GEA-00113	AMCB4FGBFP	—	2	—	349
EDH-GEA-00109	AMCB4FJFP	—	2	—	350
EDH-GEA-00111	AMCB4FJFPTF	—	2	—	350
EDH-GEA-00114	AMCB4GBFP	—	2	—	351
EDH-GEA-00102	AMCB4QDFP	—	2	—	351
EDH-GEA-00103	AMCB4SEFP	—	2	—	352
EDH-GEA-00104	AMCB6EBFP	—	3	—	352
EDH-GEA-00105	AMCB6EYFP	—	3	—	353
EDH-GEA-00106	AMCB6FBFP	—	3	—	353
EDH-GEA-00107	AMCB6FDBFP	—	3	—	354
EDH-GEA-00115	AMCB6FGBFP	—	3	—	354
EDH-GEA-00110	AMCB6FJFP	—	3	—	355
EDH-GEA-00112	AMCB6FJFPTF	—	3	—	355
EDH-GEA-00116	AMCB6GBFP	—	3	—	356
EDH-GEA-00108	AMCB6QDFP	—	3	—	356
EDH-GEA-00231	AML3120CFP	1200 A	—	—	337
EDH-GEA-00226	AML3120FP	1200 A	—	—	337
EDH-GEA-00227	AML3250CFP	250 A	—	—	338

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00220	AML3250FP	250 A	—	—	338
EDH-GEA-00219	AML3250SFP	250 A	—	—	338
EDH-GEA-00228	AML3400CFP	400 A	—	—	338
EDH-GEA-00222	AML3400FP	400 A	—	—	339
EDH-GEA-00221	AML3400SFP	400 A	—	—	339
EDH-GEA-00229	AML3600CFP	600 A	—	—	339
EDH-GEA-00224	AML3600FP	600 A	—	—	339
EDH-GEA-00223	AML3600SFP	600 A	—	—	340
EDH-GEA-00230	AML3800CFP	800 A	—	—	340
EDH-GEA-00225	AML3800FP	800 A	—	—	340
EDH-GEA-00235	ANK120D	1200 A	—	—	380
EDH-GEA-00234	ANK800D	800 A	—	—	380
EDH-GEA-00233	ANKN120	600-1200 A	—	—	381
EDH-GEA-00232	ANKN400	250/400 A	—	—	381
EDH-GEA-00369	FCAL12	15-20 A	—	—	421
EDH-GEA-00371	FCAL13	25-60 A	—	—	421
EDH-GEA-00373	FCAL14	70-100 A	—	—	421
EDH-GEA-00375	FCAL15	150 A	—	—	423
EDH-GEA-00378	FCAL16	250 A	—	—	423
EDH-GEA-00370	FCALK12	15-20 A	—	—	420
EDH-GEA-00372	FCALK13	25-60 A	—	—	420
EDH-GEA-00374	FCALK14	70-100 A	—	—	420
EDH-GEA-00376	FCALK15	150 A	—	—	422
EDH-GEA-00377	FCALK15LV	150 A	—	—	422
EDH-GEA-00379	FCALK16	250 A	—	—	422
EDH-GEA-00380	FCALK16LV	250 A	—	—	423
EDH-GEA-00381	FCALK218H	—	2	—	424
EDH-GEA-00382	FCALK318H	—	3	—	424
EDH-GEA-00059	MB133	150 A	3	—	296
EDH-GEA-00060	MB133WB	150 A	3	—	297
EDH-GEA-00051	MB233	225 A	3	—	297
EDH-GEA-00053	MB2332	400 A	6	—	297
EDH-GEA-00054	MB2332WB	400 A	6	—	298
EDH-GEA-00052	MB233WB	225 A	3	—	298
EDH-GEA-00045	MB332	400/600 A	2	—	298
EDH-GEA-00046	MB332WB	600 A	2	—	299
EDH-GEA-00055	MB333	400/600 A	3	—	299
EDH-GEA-00056	MB333WB	600 A	3	—	299
EDH-GEA-00057	MB423	100 A	3	—	300
EDH-GEA-00058	MB426	100 A	6	—	300
EDH-GEA-00044	MB512	225 A	2	—	300
EDH-GEA-00049	MB513	225 A	3	—	301
EDH-GEA-00050	MB516	400 A	6	—	301
EDH-GEA-00042	MB612	100 A	2	—	301
EDH-GEA-00047	MB613	100 A	3	—	302
EDH-GEA-00043	MB614	100 A	4	—	302
EDH-GEA-00048	MB616	100 A	6	—	302
EDH-GEA-00061	MLA1	225 A	—	—	303
EDH-GEA-00062	MLA2	225 A	—	—	303
EDH-GEA-00063	MLA41	400 A	—	—	303
EDH-GEA-00064	MLA61	600 A	—	—	304
EDH-GEA-00065	MLA62	400/600 A	—	—	304

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00066	MLR1	225 A	—	—	304
EDH-GEA-00067	MLR2	225 A	—	—	304
EDH-GEA-00068	MLR41	400 A	—	—	304
EDH-GEA-00069	MLR61	400/600 A	—	—	305
EDH-GEA-00070	MLT1	225 A	—	—	305
EDH-GEA-00071	MLT2	225 A	—	—	305
EDH-GEA-00073	MLT41	400 A	—	—	305
EDH-GEA-00072	MLT42	400 A	—	—	305
EDH-GEA-00074	NKA	225 A	—	—	307
EDH-GEA-00075	NKA42	400 A	—	—	307
EDH-GEA-00080	NKA4FT	400 A	—	—	307
EDH-GEA-00076	NKR	225 A	—	—	307
EDH-GEA-00077	NKR4	400 A	—	—	307
EDH-GEA-00078	NKT	225 A	—	—	308
EDH-GEA-00079	NKT4	400 A	—	—	308
EDH-GEA-00262	SF2DPK	225 A	—	—	326
EDH-GEA-00266	SK12SPK	1200 A	—	—	326
EDH-GEA-00265	SK8SPK	800 A	—	—	326
EDH-GEA-00354	TC018	15-150 A	—	—	426
EDH-GEA-00284	TCAL12	15-60 A	—	—	397
EDH-GEA-00341	TCAL124	Cu 275-1200 A / Al 225-1100 A	—	—	437
EDH-GEA-00344	TCAL125	600-1200 A	—	—	437
EDH-GEA-00285	TCAL12A	70-90 A	—	—	397
EDH-GEA-00283	TCAL14	15-30 A	—	—	397
EDH-GEA-00286	TCAL15	100-150 A	—	—	398
EDH-GEA-00335	TCAL18	15-150 A	—	—	427
EDH-GEA-00360	TCAL18LV	15-150 A	—	—	427
EDH-GEA-00363	TCAL19PD1	125 A max	—	—	427
EDH-GEA-00364	TCAL19PD3	125 A max	—	—	425
EDH-GEA-00365	TCAL28PD1	250 A max	—	—	429
EDH-GEA-00366	TCAL28PD3	250 A max	—	—	428
EDH-GEA-00337	TCAL29	70-250 A	—	—	430
EDH-GEA-00361	TCAL29LV	70-250 A	—	—	430
EDH-GEA-00367	TCAL40PD1	400 A max	—	—	433
EDH-GEA-00368	TCAL40PD3	400 A max	—	—	431
EDH-GEA-00308	TCAL81	300-800 A (SK1200 table)	—	—	416
EDH-GEA-00342	TCALK2124	Cu 275-1200 A / Al 225-1100 A	—	—	435
EDH-GEA-00345	TCALK2125	600-1200 A	—	—	436
EDH-GEA-00343	TCALK3124	Cu 275-1200 A / Al 225-1100 A	—	—	436
EDH-GEA-00346	TCALK3125	600-1200 A	—	—	436
EDH-GEA-00336	TCALK318	15-150 A	—	—	426
EDH-GEA-00338	TCALK329	70-250 A	—	—	429
EDH-GEA-00339	TCLK265	125-600 A	—	—	432
EDH-GEA-00340	TCLK365	125-600 A	—	—	432
EDH-GEA-00358	TCO124	600-1200 A	—	—	437
EDH-GEA-00359	TCO125	600-1200 A	—	—	438
EDH-GEA-00355	TCO29	70-250 A	—	—	430
EDH-GEA-00356	TCOK265	125-600 A	—	—	433
EDH-GEA-00357	TCOK365	125-600 A	—	—	433
EDH-GEA-00256	TED1DPK	150 A	—	—	327
EDH-GEA-00261	TEL1DPK	150 A	—	—	327
EDH-GEA-00257	TF2DPK	225 A	—	—	327

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00259	TJ4DPK	400 A	—	—	327
EDH-GEA-00260	TJ6DPK	600 A	—	—	328
EDH-GEA-00264	TK12SPK	1200 A	—	—	328
EDH-GEA-00263	TK8SPK	800 A	—	—	328
EDH-GEA-00258	TQ2DPK	225 A	—	—	328
EDH-SIE-00040	2NLK42B	250A (18, 30, 42 ckt)	—	—	515
EDH-SIE-00041	2NLK54B	250A (54, 66 ckt)	—	—	516
EDH-SIE-00042	42NLK54B	all 400A (30, 54, 66 ckt)	—	—	516
EDH-SIE-00029	4MLKA1	400A	—	—	446
EDH-SIE-00019	4MLKA1A	400A	—	—	508
EDH-SIE-00023	4MLKA1B	400A	—	—	508
EDH-SIE-00030	4MLKA3	400A	—	—	446
EDH-SIE-00020	4MLKA3A	400A	—	—	509
EDH-SIE-00024	4MLKA3B	400A	—	—	509
EDH-SIE-00031	4MLKC1	400A	—	—	446
EDH-SIE-00021	4MLKC1A	400A	—	—	510
EDH-SIE-00032	4MLKC3	400A	—	—	447
EDH-SIE-00022	4MLKC3A	400A	—	—	510
EDH-SIE-00155	6CLE2	125A max (table max-amp rating)	—	—	482
EDH-SIE-00157	6QR2	225A max (table max-amp rating)	—	—	483
EDH-SIE-00102	BBKB32	100A max	—	—	450
EDH-SIE-00108	BBKQR1	225A max	—	—	452
EDH-SIE-00109	BBKQR2	225A max	—	—	463
EDH-SIE-00103	BBKVA4P2P3	125A max	—	—	453
EDH-SIE-00112	BBKVA5262P2S	250A max	—	—	453
EDH-SIE-00114	BBKVA52P3T	250A max	—	—	463
EDH-SIE-00038	CNLK42B	250A (18, 30, 42 ckt)	—	—	517
EDH-SIE-00039	CNLK54B	all 400A (30, 54, 66) and 250A 54/66 ckt	—	—	517
EDH-SIE-00035	LNLK4X11B	250A & 400A	—	—	518
EDH-SIE-00033	LNLK5X12A	250A & 400A	—	—	518
EDH-SIE-00036	LNLK6X17B	250A & 400A	—	—	519
EDH-SIE-00034	LNLK7X18A	250A & 400A	—	—	519
EDH-SIE-00037	LNLK7X20B	250A & 400A	—	—	520
EDH-SIE-00045	MBKBC3	100A max	—	—	441
EDH-SIE-00043	MBKBL1	100A max	—	—	441
EDH-SIE-00044	MBKBL3	100A max	—	—	442
EDH-SIE-00048	MBKED1	125A max	—	—	442
EDH-SIE-00003	MBKED1A	125A max	2-pole (1-phase)	—	500
EDH-SIE-00049	MBKED3	125A max	—	—	442
EDH-SIE-00004	MBKED3A	125A max	3-pole (3-phase)	—	500
EDH-SIE-00052	MBKFD1	250A max	—	—	443
EDH-SIE-00007	MBKFD1A	250A max	2-pole (1-phase)	—	501
EDH-SIE-00053	MBKFD3	250A max	—	—	443
EDH-SIE-00008	MBKFD3A	250A max	3-pole (3-phase)	—	501
EDH-SIE-00054	MBKJD1	400A max	—	—	443
EDH-SIE-00055	MBKJD3	400A max	—	—	444
EDH-SIE-00012	MBKJD3B	400A max	—	—	502
EDH-SIE-00046	MBKNB1	125A max	—	—	444
EDH-SIE-00047	MBKNB3	125A max	—	—	444

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00050	MBKQR1	225A max	—	—	445
EDH-SIE-00005	MBKQR1A	225A max	2-pole (1-phase)	—	502
EDH-SIE-00051	MBKQR3	225A max	—	—	445
EDH-SIE-00006	MBKQR3A	225A max	3-pole (3-phase)	—	503
EDH-SIE-00001	MBKVA41A	125A max	2-pole (1-phase)	—	504
EDH-SIE-00002	MBKVA41B	125A max	3-pole (3-phase)	—	505
EDH-SIE-00009	MBKVA5262A	250A max	2-pole (1-phase)	—	506
EDH-SIE-00010	MBKVA5262B	250A max	3-pole (3-phase)	—	507
EDH-SIE-00011	MBKVA5363A	400A max	—	—	507
EDH-SIE-00149	MG1	800A max (table max-amp rating)	—	—	467
EDH-SIE-00175	MG1D	800A max (table max-amp rating)	—	—	484
EDH-SIE-00025	MLKA1	250A	—	—	447
EDH-SIE-00015	MLKA1A	250A	—	—	511
EDH-SIE-00026	MLKA3	250A	—	—	447
EDH-SIE-00016	MLKA3A	250A	—	—	511
EDH-SIE-00027	MLKC1	250A	—	—	448
EDH-SIE-00017	MLKC1A	250A	—	—	512
EDH-SIE-00028	MLKC3	250A	—	—	448
EDH-SIE-00018	MLKC3A	250A	—	—	512
EDH-SIE-00179	NG1D	1200A max (table max-amp rating)	—	—	484
EDH-SIE-00125	S3VA41T	125A max (table max-amp rating)	—	—	467
EDH-SIE-00151	S3VA41TD	125A max (table max-amp rating)	—	—	485
EDH-SIE-00152	S3VA41TDHD	125A max (table max-amp rating)	—	—	485
EDH-SIE-00129	S3VA52T	150/250A max (table max-amp rating)	—	—	468
EDH-SIE-00156	S3VA52TD	150/250A max (table max-amp rating)	—	—	486
EDH-SIE-00135	S3VA53T	400A max (table max-amp rating)	—	—	468
EDH-SIE-00182	S3VA53T2D	400A max (table max-amp rating)	—	—	548
EDH-SIE-00161	S3VA53TD	400A max (table max-amp rating)	—	—	486
EDH-SIE-00142	S3VA54T	600A max (table max-amp rating)	—	—	469
EDH-SIE-00185	S3VA54T2D	600A max (table max-amp rating)	—	—	548
EDH-SIE-00168	S3VA54TD	600A max (table max-amp rating)	—	—	487
EDH-SIE-00186	S3VA55TD	800/1000A max (table max-amp rating)	—	—	549
EDH-SIE-00187	S3VA57TD	1200A max (table max-amp rating)	—	—	549
EDH-SIE-00136	S3VA63T	400A max (table max-amp rating)	—	—	469
EDH-SIE-00162	S3VA63TD	400A max (table max-amp rating)	—	—	487
EDH-SIE-00143	S3VA64T	600A max (table max-amp rating)	—	—	470
EDH-SIE-00169	S3VA64TD	600A max (table max-amp rating)	—	—	488
EDH-SIE-00124	SBL	100A max (table max-amp rating)	—	—	470
EDH-SIE-00150	SBLBD	100A max (table max-amp rating)	—	—	488
EDH-SIE-00128	SCE	125A max (table max-amp rating)	—	—	471
EDH-SIE-00180	SCED	125A max (table max-amp rating)	—	—	550
EDH-SIE-00134	SCF	250A max (table max-amp rating)	—	—	471
EDH-SIE-00160	SCFD	250A max (table max-amp rating)	—	—	489
EDH-SIE-00139	SCJ	400A max (table max-amp rating)	—	—	471
EDH-SIE-00167	SCJD	400A max (table max-amp rating)	—	—	489
EDH-SIE-00146	SCL	600A max (table max-amp rating)	—	—	472
EDH-SIE-00172	SCLD	600A max (table max-amp rating)	—	—	490
EDH-SIE-00130	SDGD	150A max (table max-amp rating)	—	—	472

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00127	SE6	125A max (table max-amp rating)	—	—	473
EDH-SIE-00154	SE6D	125A max (table max-amp rating)	—	—	490
EDH-SIE-00133	SF6	250A max (table max-amp rating)	—	—	473
EDH-SIE-00159	SF6D	250A max (table max-amp rating)	—	—	491
EDH-SIE-00132	SFG	250A max (table max-amp rating)	—	—	473
EDH-SIE-00158	SFGD	250A max (table max-amp rating)	—	—	491
EDH-SIE-00126	SGB2	125A max (table max-amp rating)	—	—	474
EDH-SIE-00153	SGB2D	125A max (table max-amp rating)	—	—	492
EDH-SIE-00138	SJ1	400A max (table max-amp rating)	—	—	474
EDH-SIE-00165	SJ1D	400A max (table max-amp rating)	—	—	492
EDH-SIE-00166	SJ2D	400A max (table max-amp rating)	—	—	493
EDH-SIE-00137	SJG	400A max (table max-amp rating)	—	—	474
EDH-SIE-00164	SJG1D	400A max (table max-amp rating)	—	—	493
EDH-SIE-00163	SJG2D	400A max (table max-amp rating)	—	—	494
EDH-SIE-00145	SL6	600A max (table max-amp rating)	—	—	475
EDH-SIE-00171	SL6D	600A max (table max-amp rating)	—	—	494
EDH-SIE-00144	SLG	600A max (table max-amp rating)	—	—	475
EDH-SIE-00170	SLGD	600A max (table max-amp rating)	—	—	495
EDH-SIE-00176	SLM1D	800A max (table max-amp rating)	—	—	495
EDH-SIE-00056	SMBKED1	125A max	—	—	532
EDH-SIE-00057	SMBKED3	125A max	—	—	533
EDH-SIE-00058	SMBKFD1	250A max	—	—	533
EDH-SIE-00059	SMBKFD3	250A max	—	—	533
EDH-SIE-00060	SMBKJD1	400A max	—	—	534
EDH-SIE-00061	SMBKJD3	400A max	—	—	534
EDH-SIE-00177	SMND	800/1200A max (table max-amp rating)	—	—	496
EDH-SIE-00131	SQR	225A max (table max-amp rating)	—	—	475
EDH-SIE-00181	SQRD	225A max (table max-amp rating)	—	—	550
EDH-SIE-00141	SSCJ	400A max (table max-amp rating)	—	—	476
EDH-SIE-00184	SSCJD	400A max (table max-amp rating)	—	—	551
EDH-SIE-00148	SSCL	600A max (table max-amp rating)	—	—	476
EDH-SIE-00174	SSCLD	600A max (table max-amp rating)	—	—	496
EDH-SIE-00140	SSJ1	400A max (table max-amp rating)	—	—	477
EDH-SIE-00183	SSJ1D	400A max (table max-amp rating)	—	—	551
EDH-SIE-00147	SSL6	600A max (table max-amp rating)	—	—	477
EDH-SIE-00173	SSL6D	600A max (table max-amp rating)	—	—	497
EDH-SIE-00178	SSMND	800/1200A max (table max-amp rating)	—	—	497
EDH-SQD-00081	QMB12CLA	1200 A	—	—	235
EDH-SQD-00002	QMB221HW	30-blank (single switch in twin frame) A	2	240 Vac / 250 Vdc	257
EDH-SQD-00001	QMB221TW	30-30 (twin) A	2	240 Vac / 250 Vdc	258
EDH-SQD-00004	QMB222HW	60-blank A	2	240 Vac / 250 Vdc	258
EDH-SQD-00003	QMB222TW	60-60 (twin) A	2	240 Vac / 250 Vdc	259
EDH-SQD-00006	QMB223HW	100-blank A	2	240 Vac / 250 Vdc	259
EDH-SQD-00005	QMB223TW	100-100 (twin) A	2	240 Vac / 250 Vdc	260
EDH-SQD-00007	QMB224W	200 (single) A	2	240 Vac / 250 Vdc	260
EDH-SQD-00008	QMB225W	400 (single) A	2	240 Vac / 250 Vdc	261
EDH-SQD-00009	QMB225WT3	400 (single, 300 Vac Class T fuses only) A	2	240 Vac	261
EDH-SQD-00023	QMB261HW	30-blank A	2	600 Vac / 250 Vdc	262
EDH-SQD-00022	QMB261TW	30-30 (twin) A	2	600 Vac / 250 Vdc	262
EDH-SQD-00025	QMB262HW	60-blank A	2	600 Vac / 250 Vdc	263
EDH-SQD-00024	QMB262TW	60-60 (twin) A	2	600 Vac / 250 Vdc	263

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00027	QMB263HW	100-blank A	2	600 Vac / 250 Vdc	264
EDH-SQD-00026	QMB263TW	100-100 (twin) A	2	600 Vac / 250 Vdc	264
EDH-SQD-00028	QMB264W	200 (single) A	2	600 Vac / 250 Vdc	265
EDH-SQD-00011	QMB321HW	30-blank A	3	240 Vac	265
EDH-SQD-00010	QMB321TW	30-30 (twin) A	3	240 Vac	266
EDH-SQD-00013	QMB322HW	60-blank A	3	240 Vac	266
EDH-SQD-00012	QMB322TW	60-60 (twin) A	3	240 Vac	266
EDH-SQD-00015	QMB323HW	100-blank A	3	240 Vac	267
EDH-SQD-00014	QMB323TW	100-100 (twin) A	3	240 Vac	267
EDH-SQD-00016	QMB324W	200 (single) A	3	240 Vac	268
EDH-SQD-00017	QMB325W	400 (single) A	3	240 Vac	269
EDH-SQD-00018	QMB325WT3	400 (single, 300 Vac Class T fuses only) A	3	240 Vac	269
EDH-SQD-00019	QMB326W	600 (single) A	3	240 Vac	270
EDH-SQD-00020	QMB326WT3	600 (single, 300 Vac Class T fuses only) A	3	240 Vac	270
EDH-SQD-00021	QMB327WT3	800 (single, 300 Vac Class T fuses only) A	3	240 Vac	271
EDH-SQD-00030	QMB361HW	30-blank A	3	600 Vac	271
EDH-SQD-00029	QMB361TW	30-30 (twin) A	3	600 Vac	272
EDH-SQD-00032	QMB362HW	60-blank A	3	600 Vac	272
EDH-SQD-00033	QMB362T21W	60-30 (twin, unequal) A	3	600 Vac	273
EDH-SQD-00031	QMB362TW	60-60 (twin) A	3	600 Vac	273
EDH-SQD-00035	QMB363HW	100-blank A	3	600 Vac	274
EDH-SQD-00036	QMB363T31W	100-30 (twin, unequal) A	3	600 Vac	274
EDH-SQD-00037	QMB363T32W	100-60 (twin, unequal) A	3	600 Vac	275
EDH-SQD-00034	QMB363TW	100-100 (twin) A	3	600 Vac	275
EDH-SQD-00038	QMB364W	200 (single) A	3	600 Vac	276
EDH-SQD-00039	QMB365W	400 (single) A	3	600 Vac / 250 Vdc	276
EDH-SQD-00040	QMB365WT6	400 (single, 600 Vac Class T fuses only) A	3	600 Vac	277
EDH-SQD-00041	QMB366W	600 (single) A	3	600 Vac / 250 Vdc	277
EDH-SQD-00042	QMB367W	800 (single) A	3	600 Vac	278
EDH-SQD-00080	QMB8CLA	800 A	—	—	236
EDH-SQD-00044	QMJ361T	30-30 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	278
EDH-SQD-00045	QMJ362T	60-60 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	279
EDH-SQD-00047	QMJ363H	100-blank A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	279
EDH-SQD-00046	QMJ363T	100-100 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	280
EDH-SQD-00049	QMJ364H	200-blank A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	280
EDH-SQD-00048	QMJ364T	200-200 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	281
EDH-SQD-00050	QMJ365	400 (single) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	281
EDH-SQD-00051	QMJ366	600 (single) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	282
EDH-SQD-00152	S33930	1200 A (100% rated, for R-frame applications)	—	—	226
EDH-SQD-00153	SL100	100 A	—	—	226
EDH-SQD-00149	SL1200P5	1200 A	—	—	226
EDH-SQD-00150	SL1200P6	1200 A	—	—	227
EDH-SQD-00151	SL1200P7	1200 A	—	—	227

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00146	SL250	250 A	—	—	227
EDH-SQD-00147	SL400	400 A	—	—	228
EDH-SQD-00154	SL800	800 A	—	—	228
EDH-SQD-00148	SL800M5	800 A	—	—	228

9.7 Physical dimension and hole-pattern index

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00001	KCDPFB100	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting) **A**	—	21
EDH-EAT-00002	KCDPED225	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting) **A**	—	21
EDH-EAT-00003	KCDPFBP	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting) **A**	—	22
EDH-EAT-00004	KCDPCA	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting) **A**	—	20
EDH-EAT-00005	KCDPKB	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting) **A**	—	23
EDH-EAT-00006	KCDPLB	Occupies 5.50 in (139.7 mm) = 4X of CDP chassis height (Twin mounting) **A**	—	25
EDH-EAT-00007	KCDPLA400	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting) **A**	—	23
EDH-EAT-00008	KCDPLA600	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting) **A**	—	24
EDH-EAT-00009	KCDPLCL	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting) **A**	—	25
EDH-EAT-00010	KCDPMC	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting) **A**	—	26
EDH-EAT-00011	KCDPNC	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting) **A**	—	27
EDH-EAT-00012	KCDPNBP	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting) **A**	—	27
EDH-EAT-00014	KCDP_X	Height = n x 1.38 in (35.1 mm) **A**	—	28
EDH-EAT-00028	KFDP4XT	Occupies 5.50 in (139.7 mm) = 4X **A**	—	221
EDH-EAT-00029	KFDP5XT	Occupies 6.88 in (174.8 mm) = 5X **A**	—	221
EDH-EAT-00030	KFDPB6X-2	Occupies 8.25 in (209.6 mm) = 6X **A**	—	222
EDH-EAT-00031	KFDPW9X-4	Occupies 12.38 in (314.5 mm) = 9X **A**	—	224
EDH-EAT-00032	KFDPW11X-6	Occupies 15.13 in (384.3 mm) = 11X **A**	—	222
EDH-EAT-00033	KFDPW11X-8	Occupies 15.13 in (384.3 mm) = 11X **A**	—	223
EDH-EAT-00034	KFDPW15X-12	Occupies 20.63 in (524.0 mm) = 15X **A**	—	223
EDH-EAT-00036	KFDPWT3211R	4X of chassis height **A**	—	48
EDH-EAT-00037	KFDPWT3611R	4X of chassis height **A**	—	49
EDH-EAT-00038	KFDPWT3222R	4X of chassis height **A**	—	48
EDH-EAT-00039	KFDPWT3622R	4X of chassis height **A**	—	49
EDH-EAT-00040	KFDPWT3233R	4X of chassis height **A**	—	49
EDH-EAT-00041	KFDPWT3633R	5X of chassis height **A**	—	50
EDH-EAT-00042	KFDPBS324R	6X of chassis height **A**	—	45
EDH-EAT-00043	KFDPBS364R	6X of chassis height **A**	—	46
EDH-EAT-00044	KFDPW325R	9X of chassis height **A**	—	46
EDH-EAT-00045	KFDPW365R	9X of chassis height **A**	—	47
EDH-EAT-00046	KFDPW326R	11X of chassis height **A**	—	46
EDH-EAT-00047	KFDPW366R	11X of chassis height **A**	—	47
EDH-EAT-00048	KFDPW367	11X of chassis height **A**	—	47
EDH-EAT-00049	KFDPW368	15X of chassis height **A**	—	48
EDH-EAT-00064	3456B99H05	Height 15.00 in (381.0 mm) **A**	—	56
EDH-EAT-00065	3456B99H01	Height 3.00 in (76.2 mm) **A**	—	56

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00066	3456B35H01	Height 6.00 in (152.4 mm) A	—	56
EDH-EAT-00067	K80522	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	30
EDH-EAT-00068	8450C62H39	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	30
EDH-EAT-00069	0080429	approx. 2.50 in (63.5 mm) per drawing C	—	29
EDH-EAT-00070	114C247G01	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	29
EDH-EAT-00071	3457B16G01	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	29
EDH-EAT-00072	5155C81G01	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	30
EDH-EAT-00073	414A380G02	Overall length 2.50 in (63.5 mm) A	—	31
EDH-EAT-00074	414A380G01	Overall length 3.13 in (79.5 mm); used on B10B and PRL1, 2, 3 C	—	57
EDH-EAT-00076	KPRL4FD1	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting A	—	188
EDH-EAT-00077	KPRL4FD2	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting A	—	189
EDH-EAT-00078	KPRL4ED2	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting A	—	186
EDH-EAT-00079	KPRL4FD	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting A	—	187
EDH-EAT-00080	KPRL4FBP	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting A	—	187
EDH-EAT-00081	KPRL4ED	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting A	—	185
EDH-EAT-00082	KPRL4JDS	Occupies 4.13 in (104.9 mm) = 3X of chassis height; single mounting A	—	190
EDH-EAT-00083	KPRL4JDT	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting A	—	191
EDH-EAT-00084	KPRL4KDS	Spec sheet: 25.5 in L x 9.3 in W x 3.2 in H, 9.25 lb; occupies 5.50 in (4X) A	—	192
EDH-EAT-00085	KPRL4KDT	Occupies 5.50 in (139.7 mm) = 4X of chassis height; twin mounting A	—	192
EDH-EAT-00086	KPRL4CKD	Occupies 5.50 in (139.7 mm) = 4X of chassis height; single mounting A	—	184
EDH-EAT-00087	KPRL4LCL	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting A	—	194
EDH-EAT-00088	KPRL4LAP	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting A	—	193
EDH-EAT-00089	KPRL4LD	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting A	—	195
EDH-EAT-00090	KPRL4MC	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting A	—	196
EDH-EAT-00091	KPRL4NBP	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting A	—	198
EDH-EAT-00092	KPRL4CND	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting A	—	185
EDH-EAT-00093	KPRL4ND	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting A	—	199
EDH-EAT-00094	KPRL4X12	2.75 in (69.9 mm) = 2X; twin mounting A	—	201
EDH-EAT-00095	KPRL4X22	2.75 in (69.9 mm) = 2X; twin mounting A	—	202
EDH-EAT-00096	KPRL4X32	4.13 in (104.9 mm) = 3X; twin mounting A	—	203
EDH-EAT-00097	KPRL4X334S	5.50 in (139.7 mm) = 4X; single mounting A	—	203

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00098	KPRL4X334T	5.50 in (139.7 mm) = 4X; twin mounting A	—	204
EDH-EAT-00099	KPRL4X336	5.50 in (139.7 mm) per Table 46 (Table 47 prints 8.25 in / 6X for LG frames) = 4X; single mounting A	—	205
EDH-EAT-00100	KPRL4X34	8.25 in (209.6 mm) = 6X; single mounting A	—	205
EDH-EAT-00101	KPRL4X35	8.25 in (209.6 mm) = 6X; single mounting A	—	206
EDH-EAT-00102	KPRL4FDCL	4.13 in (104.9 mm) = 3X; single mounting A	—	190
EDH-EAT-00103	KPRL4CA	2.75 in (2P, 2X) or 4.13 in (3P, 3X) = 2X/3X; twin mounting A	—	183
EDH-EAT-00104	KPRL4LC	8.25 in (209.6 mm) = 6X; single mounting A	—	194
EDH-EAT-00105	KPRL4LG	5.50 in (139.7 mm) = 4X; single mounting A	—	196
EDH-EAT-00106	KPRL4NC	8.25 in (209.6 mm) = 6X; single mounting A	—	198
EDH-EAT-00107	KPRL4MD	8.25 in (209.6 mm) = 6X; single mounting A	—	197
EDH-EAT-00108	KPRL44X	4X switch height A	—	181
EDH-EAT-00109	KPRL45X1	5X switch height A	—	182
EDH-EAT-00110	KPRL4B6XS	6X switch height A	—	183
EDH-EAT-00111	KPRL4B6XT	6X switch height A	—	183
EDH-EAT-00112	KPRL4W9X	9X switch height A	—	201
EDH-EAT-00113	KPRL4W11X	11X switch height A	—	200
EDH-EAT-00114	KPRL4W15X	15X switch height A	—	201
EDH-EAT-00369	4180B08	Height 1.00-16.00 in by H number; width not stated A	—	127
EDH-EAT-00389	4176B72	Fills 1 3/8 in (1X) to 16 1/2 in (12X) height; 13 in wide (for 20 in and 28 in wide boxes) A	—	166
EDH-EAT-00405	42C8083H01	Length 4.220 in C	—	167
EDH-EAT-00411	6554C01	Width 17 in; height 1X = 1 3/8 in ... 20X = 27 1/2 in A	—	208
EDH-EAT-00412	6554C02	Width 25 in; height in X units (1X = 1.38 in) A	—	208
EDH-EAT-00413	P41X25	1.375 in H x 25 in W C	—	208
EDH-EAT-00416	KPRL45X	Switch space 5X (6.88 in) A	—	181
EDH-EAT-00417	KPRL45XS	Switch space unknown D	—	182
EDH-EAT-00418	5PLUG3400SC	8X space A	—	210
EDH-EAT-00419	5PLUG3600SC	8X space A	—	211
EDH-EAT-00420	5PLUG3800SC	8X space A	—	211
EDH-EAT-00421	5PLUG31200TC	7X space A	—	210
EDH-EAT-00428	5PFP1S	1X height (1X = 1.38 in) A	—	213
EDH-EAT-00429	5PFP1T	1X height (1X = 1.38 in) A	—	213
EDH-EAT-00430	5PFP2S	2X height (1X = 1.38 in) A	—	213
EDH-EAT-00431	5PFP2T	2X height (1X = 1.38 in) A	—	214
EDH-EAT-00432	5PFP3S	3X height (1X = 1.38 in) A	—	214
EDH-EAT-00433	5PFP3T	3X height (1X = 1.38 in) A	—	214
EDH-EAT-00434	5PFP4S	4X height (1X = 1.38 in) A	—	214
EDH-EAT-00435	5PFP4T	4X height (1X = 1.38 in) A	—	215
EDH-EAT-00436	5PFP5S	5X height (1X = 1.38 in) A	—	215
EDH-EAT-00437	5PFP5T	5X height (1X = 1.38 in) A	—	215
EDH-EAT-00438	5PFP6S	6X height (1X = 1.38 in) A	—	215
EDH-EAT-00439	5PFP6T	6X height (1X = 1.38 in) A	—	216
EDH-EAT-00449	K80429	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	128
EDH-GEA-00029	911E347P3	3X vertical (1X = 1-3/8 in per GE convention) B	—	323
EDH-GEA-00098	AMCB4EBFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in A	—	348
EDH-GEA-00099	AMCB4EYFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	348

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00100	AMCB4FBFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in **A**	—	349
EDH-GEA-00101	AMCB4FDBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	349
EDH-GEA-00102	AMCB4QDFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in **A**	—	351
EDH-GEA-00103	AMCB4SEFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	352
EDH-GEA-00104	AMCB6EBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	352
EDH-GEA-00105	AMCB6EYFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	353
EDH-GEA-00106	AMCB6FBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	353
EDH-GEA-00107	AMCB6FDBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	354
EDH-GEA-00108	AMCB6QDFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	356
EDH-GEA-00109	AMCB4FJFP	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in **A**	—	350
EDH-GEA-00110	AMCB6FJFP	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in **A**	—	355
EDH-GEA-00111	AMCB4FJFPTF	Vertical space 2X (1X = 1-3/8 in); box width 36-44 in **A**	—	350
EDH-GEA-00112	AMCB6FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 36-44 in **A**	—	355
EDH-GEA-00113	AMCB4FGBFP	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in **A**	—	349
EDH-GEA-00114	AMCB4GBFP	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in **A**	—	351
EDH-GEA-00115	AMCB6FGBFP	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in **A**	—	354
EDH-GEA-00116	AMCB6GBFP	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in **A**	—	356
EDH-GEA-00117	AMCB2FJFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	343
EDH-GEA-00118	AMCB2FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	343
EDH-GEA-00119	AMCB2FGMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in **A**	—	342
EDH-GEA-00120	AMCB2GMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in **A**	—	344
EDH-GEA-00121	AMCB3FJFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	345
EDH-GEA-00122	AMCB3FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	346
EDH-GEA-00123	AMCB3FGMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in **A**	—	345
EDH-GEA-00124	AMCB3GMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in **A**	—	346
EDH-GEA-00125	AMCB3LBFP	Vertical space 6X (1X = 1-3/8 in); box width 27-44 in **A**	—	347
EDH-GEA-00126	AMCB2KMFP	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in **A**	—	344
EDH-GEA-00127	AMCB3KMFP	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in **A**	—	347
EDH-GEA-00128	AFP2QDD	2X vertical; box width 27-44 in **A**	—	384
EDH-GEA-00129	AFP2TED	2X vertical; box width 27-44 in **A**	—	384
EDH-GEA-00130	AFP3EYD	3X vertical; box width 27-44 in **A**	—	384
EDH-GEA-00131	AFP2FBD	2X vertical; box width 27-44 in **A**	—	383

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00132	AFP3FBD	3X vertical; box width 27-44 in A	—	385
EDH-GEA-00133	AFP3QDD	3X vertical; box width 27-44 in A	—	385
EDH-GEA-00134	AFP3SED	3X vertical; box width 27-44 in A	—	385
EDH-GEA-00135	AFP3SFD	3X vertical; box width 31-44 in A	—	385
EDH-GEA-00136	AFP3TFD	2X, 3X vertical; box width 36-44 in A	—	386
EDH-GEA-00137	AFP4FGD	4X vertical; box width 40, 44 in A	—	386
EDH-GEA-00138	AFP4SGD	4X vertical; box width 40-44 in A	—	387
EDH-GEA-00139	AFP3SFS	3X vertical; box width 27-44 in A	—	386
EDH-GEA-00140	AFP3TFS	3X vertical; box width 27-44 in A	—	386
EDH-GEA-00141	AFP4FGS	4X vertical; box width 27-44 in A	—	387
EDH-GEA-00142	AFP4SGS	4X vertical; box width 27-44 in A	—	387
EDH-GEA-00143	AFP5LCS	6X vertical; box width 27-44 in A	—	387
EDH-GEA-00144	AFP6SKS	6X vertical; box width 44 in A	—	388
EDH-GEA-00145	AMC6QBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	379
EDH-GEA-00146	AMC6EYFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	374
EDH-GEA-00147	AMC6FBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	375
EDH-GEA-00148	AMC6FDBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	375
EDH-GEA-00149	AMC6EBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	373
EDH-GEA-00150	AMC6QDFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	380
EDH-GEA-00151	AMC6FJFPTF	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	377
EDH-GEA-00152	AMC6FJFP	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	377
EDH-GEA-00153	AMC6JKFP	6X vertical (1X = 1-3/8 in); box width range 44 in A	—	379
EDH-GEA-00154	AMC6FGBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	376
EDH-GEA-00155	AMC6GBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	378
EDH-GEA-00156	AMC6FDSPF	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	376
EDH-GEA-00157	AMC6EBSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	374
EDH-GEA-00158	AMC6FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	378
EDH-GEA-00159	AMC3FJFPTF	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	364
EDH-GEA-00160	AMC3FJFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	363
EDH-GEA-00161	AMC3JKFP	6X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	365
EDH-GEA-00162	AMC3FGMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	363
EDH-GEA-00163	AMC3GMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	365
EDH-GEA-00164	AMC3KMFP	6X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	366
EDH-GEA-00165	AMC3FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	364
EDH-GEA-00166	AMC4FDBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	367
EDH-GEA-00167	AMC4EBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	366

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00168	AMC4SEFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	373
EDH-GEA-00169	AMC4QDFP	2X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	372
EDH-GEA-00170	AMC4FJFPTF	3X vertical (1X = 1-3/8 in); box width range 31-44 in **A**	—	370
EDH-GEA-00171	AMC4FJFP	3X vertical (1X = 1-3/8 in); box width range 31-44 in **A**	—	369
EDH-GEA-00172	AMC4JKFP	6X vertical (1X = 1-3/8 in); box width range 44 in **A**	—	371
EDH-GEA-00173	AMC4FGBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in **A**	—	368
EDH-GEA-00174	AMC4GBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in **A**	—	371
EDH-GEA-00175	AMC4FDSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	368
EDH-GEA-00176	AMC4EBSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	367
EDH-GEA-00177	AMC4FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	370
EDH-GEA-00178	AMC2FJFPTF	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	360
EDH-GEA-00179	AMC2FJFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	359
EDH-GEA-00180	AMC2JKFP	6X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	362
EDH-GEA-00181	AMC2FGMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	359
EDH-GEA-00182	AMC2GMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	361
EDH-GEA-00183	AMC2KMFP	6X vertical (1X = 1-3/8 in); box width range 40, 44 in **A**	—	362
EDH-GEA-00184	AMC2FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	360
EDH-GEA-00201	APP1S	1X = 1 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	388
EDH-GEA-00202	APP1	1X = 1 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	388
EDH-GEA-00203	APP1W	1X = 1 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	389
EDH-GEA-00204	APP2S	2X = 2 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	389
EDH-GEA-00205	APP2	2X = 2 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	389
EDH-GEA-00206	APP2W	2X = 2 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	389
EDH-GEA-00207	APP3S	3X = 3 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	390
EDH-GEA-00208	APP3	3X = 3 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	389
EDH-GEA-00209	APP3W	3X = 3 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	390
EDH-GEA-00210	APP4S	4X = 4 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	390
EDH-GEA-00211	APP4	4X = 4 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	390
EDH-GEA-00212	APP4W	4X = 4 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	390
EDH-GEA-00213	APP5S	5X = 5 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	391
EDH-GEA-00214	APP5	5X = 5 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	391

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00215	APP5W	5X = 5 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	391
EDH-GEA-00216	APP6S	6X = 6 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	391
EDH-GEA-00217	APP6	6X = 6 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	391
EDH-GEA-00218	APP6W	6X = 6 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	392
EDH-GEA-00219	AML3250SFP	4X module height; box width 27, 36 in A	—	338
EDH-GEA-00220	AML3250FP	6X module height; box width 36 in A	—	338
EDH-GEA-00221	AML3400SFP	4X module height; box width 27, 36, 44 in A	—	339
EDH-GEA-00222	AML3400FP	6X module height; box width 36, 44 in A	—	339
EDH-GEA-00223	AML3600SFP	4X module height; box width 27, 36, 44 in A	—	340
EDH-GEA-00224	AML3600FP	6X module height; box width 36, 44 in A	—	339
EDH-GEA-00225	AML3800FP	6X module height; box width 36, 44 in A	—	340
EDH-GEA-00226	AML3120FP	6X module height; box width 36, 44 in A	—	337
EDH-GEA-00227	AML3250CFP	6X module height; box width 36 in A	—	338
EDH-GEA-00228	AML3400CFP	6X module height; box width 36, 44 in A	—	338
EDH-GEA-00229	AML3600CFP	6X module height; box width 36, 44 in A	—	339
EDH-GEA-00230	AML3800CFP	6X module height; box width 36, 44 in A	—	340
EDH-GEA-00231	AML3120CFP	6X module height; box width 36, 44 in A	—	337
EDH-GEA-00242	AFL600	9X; box width 27, 36, 44 in A	—	341
EDH-GEA-00243	AFL120	12X; box width 36, 44 in A	—	341
EDH-GEA-00244	AMCB6TEDL	3X = 4.125 in vertical; fits 36W/40W/44W panelboards and 40W/45W switchboards A	—	388
EDH-GEA-00386	TEF1	Length behind back of breaker: 2 25/32 in (short) A	—	399
EDH-GEA-00387	TEF2	Length behind back of breaker: 4 13/32 in (long) A	—	399
EDH-GEA-00388	TEF3	Length behind back of breaker: 3 13/32 in (short) A	—	399
EDH-GEA-00389	TEF4	Length behind back of breaker: 5 25/32 in (long) A	—	400
EDH-GEA-00390	TFK1	Length behind back of breaker: 2 23/32 in (short) A	—	402
EDH-GEA-00391	TFK2	Length behind back of breaker: 5 31/32 in (long) A	—	402
EDH-GEA-00392	SGBCS1	Length behind back of breaker: 2 13/16 in (short) A	—	434
EDH-GEA-00393	SGBCS2	Length behind back of breaker: 6 1/16 in (long) A	—	435
EDH-GEA-00394	TKM11	Length behind back of breaker: 5 1/2 in A	—	419
EDH-GEA-00395	TKM12	Length behind back of breaker: 8 in A	—	419
EDH-SIE-00033	LNLK5X12A	strip length 5.80 in A	—	518
EDH-SIE-00034	LNLK7X18A	strip length 8.14 in A	—	519
EDH-SIE-00035	LNLK4X11B	strip length 6.17 in A	—	518
EDH-SIE-00036	LNLK6X17B	strip length 8.67 in A	—	519
EDH-SIE-00037	LNLK7X20B	strip length 9.92 in A	—	520
EDH-SIE-00076	DFFP3	3in high (P3 plate 2.97in) A	—	458
EDH-SIE-00077	DFFP6	6in high (P3 plate 5.97in) A	—	458
EDH-SIE-00102	BBKB32	Unit space: 3in / 6 circuits A	—	450
EDH-SIE-00103	BBKVA4P2P3	Unit space: 3in / 6 circuits A	—	453
EDH-SIE-00104	BBKED32	Unit space: 3in / 6 circuits A	—	451
EDH-SIE-00105	BBKNB32	Unit space: 3in / 6 circuits A	—	452
EDH-SIE-00106	BBKGB32	Unit space: 3in / 6 circuits A	—	451
EDH-SIE-00107	BBKEB32	Unit space: 3in / 6 circuits A	—	462
EDH-SIE-00108	BBKQR1	Unit space: 6in / 1 breaker A	—	452
EDH-SIE-00109	BBKQR2	Unit space: 6in / 2 breakers A	—	463
EDH-SIE-00110	BBKQ1	Unit space: 6in / 1 breaker A	—	452
EDH-SIE-00112	BBKVA5262P2S	Unit space: 6in / 1 breaker A	—	453
EDH-SIE-00114	BBKVA52P3T	Unit space: 6in / 2 breakers A	—	463
EDH-SIE-00124	SBL	Unit height 3.75 in A	—	470

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00125	S3VA41T	Unit height 3.75 in A	—	467
EDH-SIE-00126	SGB2	Unit height 3.75 in A	—	474
EDH-SIE-00127	SE6	Unit height 3.75 in A	—	473
EDH-SIE-00128	SCE	Unit height 3.75 in A	—	471
EDH-SIE-00129	S3VA52T	Unit height 5.00 in A	—	468
EDH-SIE-00130	SDGD	Unit height 5.00 in A	—	472
EDH-SIE-00131	SQR	Unit height 5.00 in A	—	475
EDH-SIE-00132	SFG	Unit height 5.00 in A	—	473
EDH-SIE-00133	SF6	Unit height 5.00 in A	—	473
EDH-SIE-00134	SCF	Unit height 5.00 in A	—	471
EDH-SIE-00135	S3VA53T	Unit height 6.25 in A	—	468
EDH-SIE-00136	S3VA63T	Unit height 6.25 in A	—	469
EDH-SIE-00137	SJG	Unit height 6.25 in A	—	474
EDH-SIE-00138	SJ1	Unit height 8.75 in A	—	474
EDH-SIE-00139	SCJ	Unit height 8.75 in A	—	471
EDH-SIE-00140	SSJ1	Unit height 8.75 in A	—	477
EDH-SIE-00141	SSCJ	Unit height 8.75 in A	—	476
EDH-SIE-00142	S3VA54T	Unit height 6.25 in A	—	469
EDH-SIE-00143	S3VA64T	Unit height 6.25 in A	—	470
EDH-SIE-00144	SLG	Unit height 6.25 in A	—	475
EDH-SIE-00145	SL6	Unit height 8.75 in A	—	475
EDH-SIE-00146	SCL	Unit height 8.75 in A	—	472
EDH-SIE-00147	SSL6	Unit height 8.75 in A	—	477
EDH-SIE-00148	SSCL	Unit height 8.75 in A	—	476
EDH-SIE-00149	MG1	Unit height 8.75 in A	—	467
EDH-SIE-00150	SBLBD	Unit height 3.75 in A	—	488
EDH-SIE-00151	S3VA41TD	Unit height 3.75 in A	—	485
EDH-SIE-00152	S3VA41TDHD	Unit height 7.50 in A	—	485
EDH-SIE-00153	SGB2D	Unit height 3.75 in A	—	492
EDH-SIE-00154	SE6D	Unit height 3.75 in A	—	490
EDH-SIE-00155	6CLE2	Unit height 3.75 in A	—	482
EDH-SIE-00156	S3VA52TD	Unit height 5.00 in A	—	486
EDH-SIE-00157	6QR2	Unit height 5 / 5.00 in A	—	483
EDH-SIE-00158	SFGD	Unit height 5.00 in A	—	491
EDH-SIE-00159	SF6D	Unit height 5.00 in A	—	491
EDH-SIE-00160	SCFD	Unit height 5.00 in A	—	489
EDH-SIE-00161	S3VA53TD	Unit height 6.25 in A	—	486
EDH-SIE-00162	S3VA63TD	Unit height 6.25 in A	—	487
EDH-SIE-00163	SJG2D	Unit height 6.25 in A	—	494
EDH-SIE-00164	SJG1D	Unit height 6.25 in A	—	493
EDH-SIE-00165	SJ1D	Unit height 8.75 in A	—	492
EDH-SIE-00166	SJ2D	Unit height 8.75 in A	—	493
EDH-SIE-00167	SCJD	Unit height 8.75 in A	—	489
EDH-SIE-00168	S3VA54TD	Unit height 6.25 in A	—	487
EDH-SIE-00169	S3VA64TD	Unit height 6.25 in A	—	488
EDH-SIE-00170	SLGD	Unit height 6.25 in A	—	495
EDH-SIE-00171	SL6D	Unit height 8.75 in A	—	494
EDH-SIE-00172	SCLD	Unit height 8.75 in A	—	490
EDH-SIE-00173	SSL6D	Unit height 8.75 in A	—	497
EDH-SIE-00174	SSCLD	Unit height 8.75 in A	—	496
EDH-SIE-00175	MG1D	Unit height 8.75 in A	—	484
EDH-SIE-00176	SLM1D	Unit height 8.75 in A	—	495

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00177	SMND	Unit height 10 / 10.00 in A	—	496
EDH-SIE-00178	SSMND	Unit height 10 / 10.00 in A	—	497
EDH-SIE-00179	NG1D	Unit height 10 / 10.00 in A	—	484
EDH-SIE-00180	SCED	Unit height 3.75 in A	—	550
EDH-SIE-00181	SQRD	Unit height 5.00 in A	—	550
EDH-SIE-00182	S3VA53T2D	Unit height 6.25 in A	—	548
EDH-SIE-00183	SSJ1D	Unit height 8.75 in A	—	551
EDH-SIE-00184	SSCJD	Unit height 8.75 in A	—	551
EDH-SIE-00185	S3VA54T2D	Unit height 6.25 in A	—	548
EDH-SIE-00186	S3VA55TD	Unit height 8.75 in A	—	549
EDH-SIE-00187	S3VA57TD	Unit height 10.00 in A	—	549
EDH-SIE-00188	6E62	Unit height 3.75 in A	—	540
EDH-SIE-00189	6QJ2	Unit height 5 in A	—	544
EDH-SIE-00190	6F62	Unit height 5 in A	—	540
EDH-SIE-00191	6CLF1	Unit height 5 in A	—	537
EDH-SIE-00192	6JJ61	Unit height 8.75 in A	—	541
EDH-SIE-00193	6JJ62	Unit height 8.75 in A	—	541
EDH-SIE-00194	6CLJ1	Unit height 8.75 in A	—	538
EDH-SIE-00195	6SJL1	Unit height 8.75 in A	—	546
EDH-SIE-00196	6SCJ1	Unit height 8.75 in A	—	544
EDH-SIE-00197	6LL61	Unit height 8.75 in A	—	542
EDH-SIE-00198	6CLL1	Unit height 8.75 in A	—	539
EDH-SIE-00199	6SLL1	Unit height 8.75 in A	—	546
EDH-SIE-00200	6SCL1	Unit height 8.75 in A	—	545
EDH-SIE-00201	6BL2C	Unit height 3.75 in A	—	536
EDH-SIE-00202	6SCL61C	Unit height 8.75 in A	—	545
EDH-SIE-00203	6M61C	Unit height 10 in A	—	543
EDH-SIE-00204	6N61C	Unit height 10 in A	—	543
EDH-SIE-00211	6FPB01	1.25in unit height A	—	478
EDH-SIE-00212	6FPB02	2.5in unit height A	—	479
EDH-SIE-00213	6FPB03	3.75in unit height A	—	479
EDH-SIE-00214	6FPB05	5in unit height A	—	479
EDH-SIE-00215	6FPB10	10in unit height A	—	480
EDH-SIE-00216	6FPB15	15.00in (381mm) A	—	551
EDH-SIE-00240	EWK1	20in W x 5.75in D A	—	529
EDH-SIE-00241	EWK2	24in W x 7.75in D A	—	464
EDH-SIE-00242	EWK3	20in W x 5.75in D A	—	530
EDH-SIE-00243	EWK1B	20in W x 5.75in D A	—	530
EDH-SIE-00244	EWK2B	24in W x 7.75in D A	—	465
EDH-SIE-00289	NDTS	Breaker overall length 24 in with lug shields vs 16 in without (W 9, D 6, D1 8.25) A	—	572
EDH-SIE-00299	RS2643	Extension behind breaker 2.38 in A	—	558
EDH-SIE-00300	RS2644	Extension behind breaker 2.38 in A	—	558
EDH-SIE-00301	RS2641	Extension behind breaker 4.88 in A	—	557
EDH-SIE-00302	RS2642	Extension behind breaker 4.88 in A	—	557
EDH-SIE-00303	RS4756	Extension behind breaker 3.12 in A	—	560
EDH-SIE-00304	RS4755	Extension behind breaker 7.06 in A	—	560
EDH-SIE-00305	RS5774	Extension behind breaker 5.85 in A	—	564
EDH-SIE-00306	RS5773	Extension behind breaker 11.20 in A	—	564
EDH-SIE-00307	RS5784	Extension behind breaker 5.85 in A	—	565
EDH-SIE-00308	RS5783	Extension behind breaker 11.20 in A	—	565
EDH-SIE-00309	RS5788	Extension behind breaker 5.85 in A	—	573

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00310	RS5787	Extension behind breaker 11.20 in A	—	573
EDH-SIE-00311	RS5786	Extension behind breaker 5.50 in A	—	573
EDH-SIE-00312	RS5785	Extension behind breaker 8.00 in A	—	572
EDH-SQD-00001	QMB221TW	Unit mounting height 4.5 in. (114 mm) A	—	258
EDH-SQD-00002	QMB221HW	Unit mounting height 4.5 in. (114 mm) A	—	257
EDH-SQD-00003	QMB222TW	Unit mounting height 4.5 in. (114 mm) A	—	259
EDH-SQD-00004	QMB222HW	Unit mounting height 4.5 in. (114 mm) A	—	258
EDH-SQD-00005	QMB223TW	Unit mounting height 6 in. (152 mm) A	—	260
EDH-SQD-00006	QMB223HW	Unit mounting height 6 in. (152 mm) A	—	259
EDH-SQD-00007	QMB224W	Unit mounting height 9 in. (229 mm) A	—	260
EDH-SQD-00008	QMB225W	Unit mounting height 15 in. (381 mm) A	—	261
EDH-SQD-00009	QMB225WT3	Unit mounting height 9 in. (229 mm) A	—	261
EDH-SQD-00010	QMB321TW	Unit mounting height 4.5 in. (114 mm) A	—	266
EDH-SQD-00011	QMB321HW	Unit mounting height 4.5 in. (114 mm) A	—	265
EDH-SQD-00012	QMB322TW	Unit mounting height 4.5 in. (114 mm) A	—	266
EDH-SQD-00013	QMB322HW	Unit mounting height 4.5 in. (114 mm) A	—	266
EDH-SQD-00014	QMB323TW	Unit mounting height 6 in. (152 mm) A	—	267
EDH-SQD-00015	QMB323HW	Unit mounting height 6 in. (152 mm) A	—	267
EDH-SQD-00016	QMB324W	Unit mounting height 9 in. (229 mm) A	—	268
EDH-SQD-00017	QMB325W	Unit mounting height 15 in. (381 mm) A	—	269
EDH-SQD-00018	QMB325WT3	Unit mounting height 9 in. (229 mm) A	—	269
EDH-SQD-00019	QMB326W	Unit mounting height 15 in. (381 mm) A	—	270
EDH-SQD-00020	QMB326WT3	Unit mounting height 15 in. (381 mm) A	—	270
EDH-SQD-00021	QMB327WT3	Unit mounting height 15 in. (381 mm) A	—	271
EDH-SQD-00022	QMB261TW	Unit mounting height 4.5 in. (114 mm) A	—	262
EDH-SQD-00023	QMB261HW	Unit mounting height 4.5 in. (114 mm) A	—	262
EDH-SQD-00024	QMB262TW	Unit mounting height 6 in. (152 mm) A	—	263
EDH-SQD-00025	QMB262HW	Unit mounting height 6 in. (152 mm) A	—	263
EDH-SQD-00026	QMB263TW	Unit mounting height 7.5 in. (191 mm) A	—	264
EDH-SQD-00027	QMB263HW	Unit mounting height 7.5 in. (191 mm) A	—	264
EDH-SQD-00028	QMB264W	Unit mounting height 9 in. (229 mm) A	—	265
EDH-SQD-00029	QMB361TW	Unit mounting height 4.5 in. (114 mm) A	—	272
EDH-SQD-00030	QMB361HW	Unit mounting height 4.5 in. (114 mm) A	—	271
EDH-SQD-00031	QMB362TW	Unit mounting height 6 in. (152 mm) A	—	273
EDH-SQD-00032	QMB362HW	Unit mounting height 6 in. (152 mm) A	—	272
EDH-SQD-00033	QMB362T21W	Unit mounting height 6 in. (152 mm) A	—	273
EDH-SQD-00034	QMB363TW	Unit mounting height 7.5 in. (191 mm) A	—	275
EDH-SQD-00035	QMB363HW	Unit mounting height 7.5 in. (191 mm) A	—	274
EDH-SQD-00036	QMB363T31W	Unit mounting height 7.5 in. (191 mm) A	—	274
EDH-SQD-00037	QMB363T32W	Unit mounting height 7.5 in. (191 mm) A	—	275
EDH-SQD-00038	QMB364W	Unit mounting height 9 in. (229 mm) A	—	276
EDH-SQD-00039	QMB365W	Unit mounting height 15 in. (381 mm) A	—	276
EDH-SQD-00040	QMB365WT6	Unit mounting height 9 in. (229 mm) A	—	277
EDH-SQD-00041	QMB366W	Unit mounting height 15 in. (381 mm) A	—	277
EDH-SQD-00042	QMB367W	Unit mounting height 15 in. (381 mm) A	—	278
EDH-SQD-00043	QMB368W	Mounting height 24 in. (610 mm) for 1200 A single switch in QED-2 A	—	294
EDH-SQD-00044	QMJ361T	Unit mounting height 4.5 in. (114 mm) A	—	278
EDH-SQD-00045	QMJ362T	Unit mounting height 6 in. (152 mm) A	—	279
EDH-SQD-00046	QMJ363T	Unit mounting height 6 in. (152 mm) A	—	280
EDH-SQD-00047	QMJ363H	Unit mounting height 6 in. (152 mm) A	—	279
EDH-SQD-00048	QMJ364T	Unit mounting height 7.5 in. (191 mm) A	—	281

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00049	QMJ364H	Unit mounting height 7.5 in. (191 mm) A	—	280
EDH-SQD-00050	QMJ365	Unit mounting height 9 in. (229 mm) A	—	281
EDH-SQD-00051	QMJ366	Unit mounting height 15 in. (381 mm) A	—	282
EDH-SQD-00089	QMB1BLW	Covers 1.5 in. of QMB mounting space A	—	244
EDH-SQD-00090	QMB3BLW	Covers 3 in. of QMB mounting space A	—	244
EDH-SQD-00091	QMB6BLW	Covers 6 in. of QMB mounting space A	—	245
EDH-SQD-00092	QMB15BLW	Package 2.30 x 16.00 x 26.00 in., 9.04 lb (packaged) A	—	244
EDH-SQD-00137	HNM1BL	1.5 in. wide A	—	233
EDH-SQD-00138	HNM4BL	4.5 in. wide A	—	233
EDH-SQD-00139	HLN1BL	Covers 1.5 in. (38.1 mm) of breaker mounting height A	—	230
EDH-SQD-00140	HLN4BL	Covers 4.5 in. (114.3 mm) of breaker mounting height A	—	230
EDH-SQD-00141	HLN4EBL	Covers 4.5 in. (114.3 mm) of breaker mounting height A	—	231
EDH-SQD-00142	HLW1BL	Covers 1.5 in. (38.1 mm) of breaker mounting height A	—	231
EDH-SQD-00143	HLW4BL	Covers 4.5 in. (114.3 mm) of breaker mounting height A	—	232
EDH-SQD-00144	HLW4EBL	Covers 4.5 in. (114.3 mm) of breaker mounting height A	—	232
EDH-SQD-00147	SL400	Occupies 6 in. of mounting space C	—	228

Appendix A Documentation Library

OEM and supporting documents, grouped by manufacturer lineage and document type. 'Local' identifies documents preserved in docs/library/ (see docs/DOCUMENT_INDEX.csv for checksums). Documents not preserved are cited by URL; inaccessible documents are listed as research leads.

Eaton lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S56	CA08100003E	Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control 2020-06	catalog	Local	0
S57	CA08104001E (Tab 22)	Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/2a-LX/1R/2R) 2018-01	catalog	Local	10
S43	CA08104001E Tab 21 (TB01500003E)	Switchboards—Low Voltage (Consulting Application Guide Tab 21) 2018-04	catalog	Local	18
S47	IB015002EN	Eaton Pow-R-Line CS switchboards instruction manual 2021-11	instruction	ok	0
S48	IM01500001E	Pow-R-Line switchboards instruction manual 2021-05	instruction	blocked	0
S38	CA08100014E	Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions 2018-06	renewal_parts	Local	14
S46	CA08100014E Tab 5	Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt 2016-10	renewal_parts	Local	13
S42	RP01400001E	Renewal Parts RP01400001E — Pow-R-Line Xpert and legacy panelboards 2022-05	renewal_parts	Local	141
S53	RP01400001E	Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F, PRL5P, PRL1a/2a-LX, Pow-R-Command) 2009-02	renewal_parts	Local	282
S41	RP01400001E (2017)	Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, PRL5P) 2017-10	renewal_parts	Local	39
S52	RP01400001E (Z25020)	Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a, PRL2a, PRL3a, PRL4) 2021-04	renewal_parts	Local	361
S39	RP01400002E	Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CDP/HCDP, FDP) 2013-02	renewal_parts	Local	75
S40	RP01400002E (2009)	Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition) 2009-04	renewal_parts	Local	32
S55	RP01400002E (Z13209)	Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, PRL3-LX, CDP/HCDP, FDP) 2013-02	renewal_parts	Local	57
S54	RP01414001E	Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E 2011-01	renewal_parts	Local	80
S44	KPRL4KDS spec sheet	Eaton product specifications — KPRL4KDS	web	Local	1
S45	KPRL4KDT spec sheet	Eaton product specifications — KPRL4KDT	web	Local	1

Square D / Schneider Electric

Ref	Doc no.	Title / date	Type	Avail.	Entries
S96	0600DB1004	Square D I-Line Plug-on Connection Design and Advantages, Data Bulletin 2010-12-01	bulletin	blocked	0
S64	2110CT9701R07/19	I-Line Circuit Breaker Panelboards Catalog, Class 2110 2019-07	catalog	Local	12
S63	2700CT1101	Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switchboards Catalog (Class 2710, 2741, 2742) 2012-02	catalog	Local	43

Ref	Doc no.	Title / date	Type	Avail.	Entries
S94	2700CT1601	OEM QED-2 Switchboard I-Line Interiors, Single-Row and Double-Row OEM Interior Products Catalog 2023-01-11 (v1.3)	catalog	blocked	5
S65	4620CT9601R07/15	QMB Fusible Panelboards Catalog, Class 4620 2015-07	catalog	Local	93
S66	80030-695-02	I-Line (HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation, Instruction Bulletin, Class 2110 2011-09	instruction	Local	8
S95	80043-055-16	Power-Style QED-2 Switchboards Instruction Bulletin 2024-06	instruction	blocked	0
S100	FA92286	FAQ FA92286: repair parts for a QMB367W, Series E1 (E01)	renewal_parts	ok	10
S99	FA92305	FAQ FA92305: repair parts for a QMB363TW, Series E1 (E01)	renewal_parts	ok	9
S69	FA100365	FAQ FA100365: blank filler catalog numbers for current design QMB panelboards	web	ok	4
S104	FA100372	FAQ FA100372: replacement for a QMB3260 600 A QMB switch	web	ok	5
S76	FA103561	FAQ FA103561: mounting bracket screw for an FA or FH I-Line breaker	web	ok	1
S73	FA108059	FAQ FA108059: Do the blank filler plates and extensions for I-Line panelboards fit the QED switchboards?	web	ok	8
S81	FA108122	FAQ FA108122: QED cover screw part number	web	blocked	1
S71	FA112712	FAQ FA112712: What blank fillers are required in an I-Line panel when an LI breaker is replaced with a KI?	web	ok	3
S109	FA113960	FAQ FA113960: replacement branch switch for the old QMB210T Series 1 through 4	web	ok	3
S80	FA116225	FAQ FA116225: plug-button for unused holes in NEMA 1 and 3R QED-1 and QED-2 switchboards (incl. Speed-D)	web	ok	1
S74	FA117096	FAQ FA117096: difference between plug-on and bolt-on I-Line connections	web	ok	0
S110	FA118445	FAQ FA118445: part number for a 300 A / 3P circuit breaker unit for an old QMB Saflex panelboard	web	ok	2
S79	FA118475	FAQ FA118475: deadfront brackets on an I-Line HCN3254-2 panelboard	web	ok	2
S101	FA119872	FAQ FA119872: replacement for a QMB310T, series 1 through 4 switch	web	ok	4
S85	FA121592	FAQ FA121592: Are Square D QED switchboards able to have additional (splice-to) sections installed?	web	ok	0
S108	FA122202	FAQ FA122202: QMB blanks for current style QMB panelboards and switchboards with QMB distribution	web	ok	4
S106	FA122651	FAQ FA122651: replacement switch for the old QMB2240, 2P 400 A QMB switch	web	ok	5
S98	FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified)	QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T -> QMB321T + QMB306LEX; QMB306T Series 1 -> QMB322TD + QMB306LEX)	web	blocked	5
S83	FA124494	FAQ FA124494: door and frame hinges for a QED2, CMM, or Speed-D NEMA 3R switchboard	web	ok	7
S82	FA125924	FAQ FA125924: replacement handle for an outdoor QED switchboard	web	ok	1
S78	FA125949	FAQ FA125949: Can you replace the mounting bracket on the load end of I-Line breakers?	web	ok	0
S102	FA127541	FAQ FA127541: replacement for a QMB3620	web	ok	3
S105	FA128647	FAQ FA128647: replacement parts for a QMB3240	web	ok	5
S75	FA129562	FAQ FA129562: mounting screw for a PowerPact H or J frame breaker I-Line mounting bracket	web	ok	1
S68	FA225625	FAQ FA225625: Do the merchandised Speed-D switchboards with QMB branch devices come with blank fillers for the unused space?	web	ok	4
S107	FA242815	FAQ FA242815: Does Schneider offer a 1200 A QMB switch? Where is it used?	web	ok	1
S70	FA243887	FAQ FA243887: What is the difference between an I-Line Blank Filler and a Blank Extension?	web	ok	9
S86	FA308905	FAQ FA308905: Do QED 2 switchboards NEMA 1 or 3R come with a solid bottom?	web	ok	0
S103	FA88047	FAQ FA88047: replacement for a QMB3606T	web	ok	4
S72	FA93287	FAQ FA93287: blank extensions for the wide side of an HCW panelboard	web	ok	2

Ref	Doc no.	Title / date	Type	Avail.	Entries
S84	FA96877	FAQ FA96877: deadfront screws used on Square D panelboards (NF, I-Line, NQ, QMB)	web	ok	1
S87	FAQ000269509	FAQ FAQ000269509: I-Line subfeed lug kits to tap I-Line bus (SL100...SL1200P7)	web	blocked	9
S77	FAQ000274446	FAQ FAQ000274446: replacement mounting screw for L-frame breaker inside I-Line panelboard	web	ok	0
S88	FAQ000279508 / FAQ000257217	Square D QMB / QED-2 FAQ group (QED-2 Series 2 QMB mounting height 63 in.; QED-2 I-Line section limits 3000 A single row / 2000 A double row)	web	blocked	1
S67	QMB15BLW data sheet	Product data sheet QMB15BLW - Panelboard blank filler plate 2023-04-12	web	Local	1

GE / ABB lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S31	1SXU900191B0201	ReliaGear neXT Power Panelboards (brochure) 2022-01	catalog	ok	0
S16	BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014)	BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; Renewal Parts) 2014-07	catalog	Local	242
S115	BuyLog Section 3, Rev. 1/08	GE 2008 BuyLog, Section 3: Molded Case Circuit Breakers (excerpt, 3 pp.) 2008-01	catalog	Local	2
S114	BuyLog Section 3, Rev. 9/12	GE BuyLog Catalog, Section 3: Molded Case Circuit Breakers (with GO-135 list prices) 2012-09	catalog	Local	86
S112	BuyLog Section 6, Rev. 1/19	GE Products BuyLog, Section 6: Molded Case Circuit Breakers 2019-01	catalog	Local	115
S113	BuyLog Section 6, Rev. 11/13	GE BuyLog Catalog, Section 6: Molded Case Circuit Breakers 2013-11	catalog	Local	0
S116	BuyLog p. 6-103 Rev. 7/13	GE BuyLog Section 6 single page 6-103 (lugs), Rev. 7/13 2013-07	catalog	Local	4
S17	BuyLog p.11-10 Rev. 11/13	GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Parts 2013-11	catalog	Local	6
S34		BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (obsoleted)' bolt-on mounting hardware)	catalog	blocked	0
S27	DEH065 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD) 2001-09	instruction	ok	32
S30	DEH212 R02	Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S 2001-04	instruction	ok	2
S18	DEH40150 Rev.No.03	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S19	DEH40151 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S20	DEH40152 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S21	DEH40153 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S22	DEH40154 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (12-pole) unknown	instruction	Local	5
S23	DEH40155 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (12-pole) unknown	instruction	Local	5
S24	DEH40156 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Breaker Kits unknown	instruction	Local	6

Ref	Doc no.	Title / date	Type	Avail.	Entries
S25	DEH40157 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (6-pole) unknown	instruction	Local	5
S26	DEH40158 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (6-pole) unknown	instruction	Local	5
S29	DEH40392 R01	Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL 2001-04	instruction	ok	1
S28	GEH5674 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM) 2001-07	instruction	ok	41

Siemens lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S8	SI-LP-1633	NextGen P1 panelboard brochure (Siemens Canada) unknown (c.2020)	bulletin	Local	3
S5	SIE_CS_P1 / Siemens SIOS 109799956	Type P1 Panelboard data sheet (SIE_CS_P1) 2021-10	bulletin	Local	10
S6		Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf) 2021	bulletin	Local	14
S7		New Revised Type P1 Kits and Accessories (flyer; distributor file MBKQR3150HA.pdf) c.2015-2019	bulletin	Local	22
S3	Discount Schedule A, page 8-13	2005 Electrical Distribution Products price list - Switchboard Replacement and Modification Kits 2005	catalog	Local	26
S2	Power Product Catalogue Section 11	Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/FCII, IPS) 2025-05	catalog	Local	53
S117	SF-17-Sect-07 (SPEEDFAX 2017, pages revised 2017-2020)	Siemens SPEEDFAX Product Catalog, Section 7: Molded Case Circuit Breakers 2020-09	catalog	Local	68
S10	SIE Selection And Application Guide Panelboards (SIOS 109792056)	Panelboards Selection and Application Guide 2016	catalog	Local	48
S4	SPEEDFAX 2007-2008 pp.10-17..10-22	SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22 2007	catalog	Local	0
S1	SPEEDFAX Section 11 (last modified 06/24/21)	SPEEDFAX Product Catalog - Section 11 Panelboards 2021-06	catalog	Local	214
S118	SPEEDFAX Section 7 (2021 revision)	Siemens SPEEDFAX, Section 7: Molded Case Circuit Breakers (section last modified 08/17/21) 2021-08	catalog	Local	68
S9	US2:MBKBFA	Data sheet US2:MBKBFA - KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER 2021-01-06	web	Local	1

Other manufacturers

Ref	Doc no.	Title / date	Type	Avail.	Entries
S62		Elliott Electric spec sheet: P41X25 SWBD/PRL4 1X Filler 1.375"H 25"W Fits 36" 44" 45"	distributor	Local	1

Appendix B Bibliography and Source Register

S1 [SRC-00001] Siemens Industry, Inc.. *SPEEDFAX Product Catalog - Section 11 Panelboards*. SPEEDFAX Section 11 (last modified 06/24/21). 2021-06. Type: oem_catalog. URL: https://media.distributordatasolutions.com/siemenscomplete/2021q3/documents/4c3c521171b400657d1e4257e047beee1a99295b.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/speedfax_sec11_2021q3.pdf Note: 132 pages. Distributor-hosted (DDS syndication) copy of OEM PDF. Key pages: 11-7 (UPB coding), 11-13/11-14 (Revised P1 kits), 11-15 (Original P1 / S1-S2-SE kits), 11-20..11-23 (spare parts, filler chart), 11-53/11-54 (P2/P3 spare parts), 11-66/11-67 (P3 kits), 11-96 (P4 strap kits), 11-110 (P5 strap kits). Individual pages carry their own 'Revised on' dates (2019-2021).

S2 [SRC-00002] Siemens Canada Limited. *Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/FCII, IPS)*. Power Product Catalogue Section 11. 2025-05. Type: oem_catalog. URL: https://assets.new.siemens.com/siemens/assets/api/uuid:ac958a69-a1ee-45e7-95f6-152fe9153d31/s11-switchboards.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/s11-switchboards.pdf Note: PDF metadata creation 2025-05-30. p.11-5: SB1/SB2/SB3 connection strap kit table; p.11-14: S3VA52PR/S3VA53PR provision kits, nut keeper kits, 6FPB blank plates; p.11-15: CSA SMP/Series 6 strap kits (6BL2C, 6E62, 6F62, 6JJ62, 6M61C, 6N61C etc.).

S3 [SRC-00003] Siemens Energy & Automation. *2005 Electrical Distribution Products price list - Switchboard Replacement and Modification Kits*. Discount Schedule A, page 8-13. 2005. Type: oem_catalog. URL: https://assets.usesi.com/product-media/brochures/USESI_93250_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/USESI_93250_brochure.pdf Note: Single catalog page hosted by distributor (USESI). Strap kits 'for Series 5 or 6 CDP Circuit Breaker Panelboards or FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, and SB3 Switchboards ... for switchboards manufactured since 1974'. Includes list prices (2005).

S4 [SRC-00004] Siemens Power Distribution & Control. *SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22*. SPEEDFAX 2007-2008 pp.10-17..10-22. 2007. Type: oem_catalog. URL: https://www.nooutage.com/pdf/Siemens-PanelboardsP1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/Siemens-PanelboardsP1.pdf Note: Original (pre-revision) P1 pages; lists P1 branch breakers BL/BLH/HBL/BQD/NGB, subfeed QJ2/ED4/FXD6. No kit tables on these pages.

S5 [SRC-00005] Siemens Industry, Inc.. *Type P1 Panelboard data sheet (SIE_CS_P1)*. SIE_CS_P1 / Siemens SIOS 109799956. 2021-10. Type: oem_bulletin. URL: https://cache.industry.siemens.com/dl/files/956/109799956/att_1147894/v1/SIE_CS_P1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_CS_P1.pdf Note: (c) 10.2021. Revised P1 specification + main strap kit list; states 'Revised P1 kits cannot be used with original P1'.

S6 [SRC-00006] Siemens Industry, Inc.. *Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)*. 2021. Type: oem_bulletin. URL: https://michaelsforms.eastus2.cloudapp.azure.com/prod_image/30WD80V.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/30WD80V.pdf Note: Lists P2/P3 branch unit-space strap kits BBKB32, BBKVA4P2P3, BBKQR2, BBKVA5262S (sic; SpeedFax spells BBKVA5262P2S), BBKVA52P3T; strap kit for 1in frame breakers uses 3in unit space.

S7 [SRC-00007] Siemens Industry, Inc.. *New Revised Type P1 Kits and Accessories (flyer; distributor file MBKQR3150HA.pdf)*. c.2015-2019. Type: oem_bulletin. URL: https://michaelsforms.eastus2.cloudapp.azure.com/prod_image/MBKQR3150HA.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/MBKQR3150HA.pdf Note: Earlier (pre-April-2020 neutral update) Revised P1 kit list: MBK..A breaker kits, CNLK30A/42A/54A, LNLK30A/42A/54A, 2NLK..A, 42NLK..A, MBKDFA back-fed label kit, DFFP1.

S8 [SRC-00008] Siemens Canada Limited. *NextGen P1 panelboard brochure (Siemens Canada)*. SI-LP-1633. unknown (c.2020). Type: oem_bulletin. URL: https://assets.new.siemens.com/siemens/assets/api/uuid:f264c377-e970-40b2-b60d-155bc2e52f40/ca-si-lv-en-NextGen-P1-brochure-SI-LP-1633.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/NextGen-P1-brochure-SI-LP-1633.pdf Note: Canadian Revised P1 kit table; references MBKBFA back-fed main label kit and Canadian kit numbers (e.g. MBKQR12225A, MBKFD33250A, MBKJD33400A).

S9 [SRC-00009] Siemens. *Data sheet US2:MBKBFA - KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER*. US2:MBKBFA. 2021-01-06. Type: oem_web. URL: https://res.cloudinary.com/wholesale-plumbing/image/upload/Documents2/Siemens_MBKBFA_Specification_Sheet.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/Siemens_MBKBFA_Specification_Sheet.pdf Note: Minimal data sheet (title + 'Field installable kit').

S10 [SRC-00010] Siemens Industry, Inc.. *Panelboards Selection and Application Guide*. SIE Selection And Application Guide Panelboards (SIOS 109792056). 2016. Type: oem_catalog. URL: https://cache.industry.siemens.com/dl/files/056/109792056/att_1049678/v1/SIE_Selection_And_Application_Guide_Panelboards.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_Selection_And_Application_Guide_Panelboards.pdf Note: (c) 2016. Only cross-checked by part-number grep in this batch (BBKB32, BBKED32, BBKNB32, BBKQR1, BBKQR2, BBKQRP1FK, BBKQRP2FK, DFFP3, DFFP6, LNLK30A/42A/54A, SEB kits, SF6/SF6D, SJ1/SJ1D, SE6/SE6D, SQR/SQRC/SQRD, 6FPB01..10). Not fully mined.

S11 [SRC-00011] Lumen. *Lumen (Canada) product listing - Siemens 6BL2C switchboards breaker mounting kit copper 3 ph 240 V 100 A*. Type: distributor. URL: https://lumen.ca/en/products/20-power-distribution/08-panelboards/01-main-breaker-kits/p-U0lFNkJMMkM=-sie6bl2c-siemens-6bl2c-switchboards-breaker-mounting-kit-copper-3-ph-240-v-100-a (accessed 2026-10-21) Note: Seen via search summary only; breaker list varies between distributors (BL/BLH/HBL/BQD/BQD6 vs BQ/BQH/HB).

S12 [SRC-00012] various. *Distributor listings for Siemens SBL (sydist.com SIEM-SBL-50631; superbreakers.com/products/sbl; steinerelectric 'BL BKR MTG KIT FOR P4/S4/SPP PNLBD')*. Type: distributor. URL: https://www.sydist.com/Product/SIEM-SBL-50631 (accessed 2026-10-21) Note: Search-summary only. Distributor descriptions are inconsistent (one wrongly calls it a padlock kit / QR frame); SpeedFax p.11-96 is authoritative.

S13 [SRC-00013] Crescent Electric Supply. *Crescent Electric listing - QF3 Load Center Filler Plate (sub no. 12-1800-01), for QP/BQ/ED2/EQL/SEQ/EQG*. Type: distributor. URL: https://crescentelectric.com/product/47056/qpbqed2-filler-plate-sub-no-12-1800-01 (accessed 2026-10-21) Note: Search-summary only.

S14 [SRC-00014] Mike Holt Enterprises forum. *Mike Holt forum thread - Gould panels and switchboards*. Type: forum. URL: https://forums.mikeholt.com/goto/post?id=1425085 (accessed 2026-10-21) Note: Anecdotal: ITE/Gould lineage, Bulldog Pushmatic not supported by Siemens.

S15 [SRC-00015] Franklin Empire. *Franklin Empire listing - Siemens 6F62 Connecting Strap Kit, For Use With SPP/FPP/S5/F2 Panelboards, 600 VAC, 70 to 250 A, Copper, 5 in H*. Type: distributor. URL: https://franklinempire.com/en/6f62-4114-6f62.html (accessed 2026-10-21) Note: Search-summary only.

S16 [SRC-00016] GE Industrial Solutions. *BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; Renewal Parts)*. BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014). 2014-07. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_18438_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_18438_catalog.pdf Note: 52-page OEM PDF (PDF title 'GE BuyLog - Section 11: Panelboards') mirrored by distributor US Electrical Services (USESI). OEM original URL https://electrification.us.abb.com/catalog/buylog/GE%20Products%20BuyLog%202019/11_GE%20Products%20BuyLog_Panelboards.pdf returned HTTP/2 INTERNAL_ERROR / 503 from this container. Text extracted to buylog11.txt.

S17 [SRC-00017] GE Industrial Solutions. *GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Parts*. BuyLog p.11-10 Rev. 11/13. 2013-11. Type: oem_catalog. URL: https://assets.usesi.com/product-media/specification-sheets/USESI_49199_specification_sheets.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_49199_specification_sheets.pdf Note: Single-page extract of BuyLog p.11-10 mirrored by USESI; heading reads 'A-Series II Panelboards'.

S18 [SRC-00018] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Breaker Kits*. DEH40150 Rev.No.03. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/rYlgoZ/DEH40150rev03.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40150rev03.pdf Note: Distributor mirror (Carbon Controls). Original yodify mirror links now 404.

S19 [SRC-00019] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Breaker Kits*. DEH40151 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/vYA1QZ/DEH40151.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40151.pdf

S20 [SRC-00020] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Breaker Kits*. DEH40152 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/BnbG3Z/DEH40152.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40152.pdf Note: Same file also mirrored at https://cdn.lsicloud.net/kendall/Resources/AD/GE_ASPP6QD6D_Manual.pdf

S21 [SRC-00021] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit Breaker Kits*. DEH40153 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/lYWwVZ/DEH40153.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40153.pdf

S22 [SRC-00022] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (12-pole)*. DEH40154 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/LeQrBZ/DEH40154.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40154.pdf

S23 [SRC-00023] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (12-pole)*. DEH40155 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/YjVDgZ/DEH40155.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40155.pdf

S24 [SRC-00024] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Breaker Kits*. DEH40156 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/KOrvrZ/DEH40156.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40156.pdf Note: Also rendered as text at https://www.manualsdir.com/manuals/295079/ge-industrial-solutions-a-series-ii-panelboards-fb.html

S25 [SRC-00025] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (6-pole)*. DEH40157 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/AelGOZ/DEH40157.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40157.pdf

S26 [SRC-00026] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (6-pole)*. DEH40158 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/mDAggZ/DEH40158.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40158.pdf

S27 [SRC-00027] GE Industrial Systems. *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD)*. DEH065 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295540/ge-industrial-solutions-spectra-series-power-panelboards-amcb4qd-and-amcb6qd.html (accessed 2026-10-21) Note: Text rendering on manualsdir.com (4 pages); footer 'DEH065 R02 0901 (c) 2001 General Electric Company'. Table 1 quantities not captured in the text rendering.

S28 [SRC-00028] GE Industrial Systems. *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM)*. GEH5674 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294735/ge-industrial-solutions-spectra-series-power-panelboards-amc2gm-and-amc3gm.html (accessed 2026-10-21) Note: Footer 'GEH5674 R03 0701'.

S29 [SRC-00029] GE Industrial Systems. *Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL*. DEH40392 R01. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295049/ge-industrial-solutions-spectra-series-power-panelboards.html (accessed 2026-10-21)

S30 [SRC-00030] GE Industrial Systems. *Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S*. DEH212 R02. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294723/ge-industrial-solutions-spectra-series-power-panelboards-aeg47-and-aeg47s.html (accessed 2026-10-21)

S31 [SRC-00031] ABB. *ReliaGear neXT Power Panelboards (brochure)*. 1SXU900191B0201. 2022-01. Type: oem_catalog. URL: https://simplebooklet.com/abbreliagearnextpanelboards?textonly=1 (accessed 2026-10-21) Note: Read via simplebooklet text-only rendering; no kit catalog numbers present.

S32 [SRC-00032] Relectric. *NHB150PK General Electric / GE Mounting Hardware (product page)*. Type: surplus. URL: https://www.relectric.com/nhb150pk (accessed 2026-10-21)

S33 [SRC-00033] SuperBreakers. *General Electric NHB150PK Twin Mount Mounting Hardware (product page)*. Type: surplus. URL: https://www.superbreakers.com/collections/mounting-kits-panels-accessories/products/general-electric-nhb150pk-mounting-hardware (accessed 2026-10-21) Note: Content seen only via search-engine summary; page not fetched directly.

S34 [SRC-00034] ABB. *BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (obsoleted)' bolt-on mounting hardware)*. Type: oem_catalog. URL: https://electrification.us.abb.com/catalog/buylog/11_BuyLog_Panelboards.pdf (accessed 2026-10-21) Status: blocked. Note: curl: empty reply; WebFetch: HTTP 503. Contents known only from search-engine summary (TOC mentions ReliaGear neXT nomenclature and 'Spectra (obsoleted) bolt-on panelboard mounting hardware'; 'Retrofit kit for Spectra panelboards').

S35 [SRC-00035] manualmachine.com (mirror of GE documents). *GE Industrial Solutions manuals on manualmachine.com (DEH061 AMCB3KM/AMCB2KM; DEH042 cover supports SE/SF/TE/TF/TQ/TEL; GEH5589 APN/APNB interiors; AMCB4GB/AMCB6GB; AMCB2GM/AMCB3GM; A-Series II TQD)*. Type: archive. URL: https://manualmachine.com/ge/amcb3km/12960805-user-manual/ (accessed 2026-10-21) Status: blocked. Note: HTTP 403 to both curl and WebFetch. Existence/titles known only from search results.

S36 [SRC-00036] Stanion Wholesale Electric. *TQ2DPK GE product page*. Type: distributor. URL: https://www.stanion.com/Product/tq2dpkge (accessed 2026-10-21) Status: 404. Note: Description known only from search-engine summary; direct fetch returned 404.

S37 [SRC-00037] Surplus Record. *Surplus Record listings: General Electric AV-Line switchboards (800/1200/1600 A)*. Type: surplus. URL: https://surplusrecord.com/listing/1600-amp-general-electric-av-line-switchboard-480-volts-3ph-4w-10-breaker-power-break-dist-main-1086962/ (accessed 2026-10-21) Note: Seen via search-engine summary only.

S38 [SRC-00038] Eaton. *Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions*. CA08100014E. 2018-06. Type: oem_renewal_parts. URL: https://www.revereelectric.com/ASSETS/DOCUMENTS/ITEMS/EN/EATON_1MMMSB_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Vol12_CA08100014E_revereelectric_EATON_1MMMSB_Catalog.pdf Note: Full 734-page Volume 12 hosted by distributor Revere Electric (mirror of OEM PDF). Tabs carry mixed dates: Tab 4 Panelboards dated June 2018; Tab 3 MCCB, Tab 5 Loadcenters and Tab 15 Distribution Switchboards dated October 2016. Key pages: V12-T4-1..T4-23 (panelboards: replacement charts, CDP/FDP/PRL layouts, renewal-parts doc index), V12-T15-1..T15-6 (switchboards incl. WF/WRP, ES, Pow-R-Line C history), V12-T3-10..T3-12 (Westinghouse breaker dimensions, last-manufactured dates), V12-T3-80..87 (panelboard-only replacement breakers RE/REH/RHF...). Eaton-hosted tab copy: https://www.eaton.com/content/dam/eaton/support/poweredge/aftermarket/vol12-tab04.pdf (eaton.com fetch failed from container).

S39 [SRC-00039] Eaton. *Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CDP/HCDP, FDP)*. RP01400002E. 2013-02. Type: oem_renewal_parts. URL: https://www.farnell.com/datasheets/2307937.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_2013_farnell.pdf Note: 20 pages, Publication No. RP01400002E / Z13209, effective February 2013, supersedes April 2009. Distributor (Farnell) mirror of OEM PDF. Contains CDP connector kits (Table 19 p.14), CDP retrofit kits (Tables 16-18 pp.12-13), FDP connector/retrofit kits (Tables 20-21 pp.17-18), PRL1/2/3 replacement connectors, neutral/ground bars, trim locks and clamps. Pricing in PL01400002E (not found).

S40 [SRC-00040] Eaton. *Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition)*. RP01400002E (2009). 2009-04. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/brochures/USESI_501159_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_2009_usesi.pdf Note: Earlier edition hosted by distributor US Electrical Services. Kit catalog numbers identical to 2013 edition except the hardware-only example: 2009 shows 'KCDPFD100H', 2013 shows 'KCDPFB100-H'.

S41 [SRC-00041] Eaton. *Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, PRL5P)*. RP01400001E (2017). 2017-10. Type: oem_renewal_parts. URL: https://www.elliottelectric.com/Media/5155C62H01-CHS-2-1-SpecificationSheet.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400001E_2017_elliott.pdf Note: 36 pages, effective October 2017, supersedes February 2009. Distributor (Elliott Electric) mirror. PRL4 breaker connector kits Table 37 p.24, fusible connector kits Table 38 p.25, retrofit kits Tables 39-40 p.26, PRL4 blank covers Table 36 p.24.

S42 [SRC-00042] Eaton. *Renewal Parts RP01400001E — Pow-R-Line Xpert and legacy panelboards*. RP01400001E. 2022-05. Type: oem_renewal_parts. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/pow-r-line-renewal-parts-rp01400001e.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/rp01400001e_2022_cl.pdf Note: 40 pages, effective May 2022, supersedes April 2021. eaton.com URL timed out from container; identical file path retrieved from Eaton Chile mirror http://www.eatontransmisiones.cl/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/pow-r-line-renewal-parts-rp01400001e.pdf . PRL4X/PRL4 breaker connector kits Tables 46-47 pp.32-33 (new KPRL4X.. numbers), fusible kits Table 48 p.34.

S43 [SRC-00043] Eaton. *Switchboards—Low Voltage (Consulting Application Guide Tab 21)*. CA08104001E Tab 21 (TB01500003E). 2018-04. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_515260_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_515260_catalog_CA08104001E_Tab21.pdf Note: Distributor-hosted copy of Eaton Consulting Application Guide Section 21 (April 2018). Pow-R-Line C description p.21.0-8/21.0-9, Pow-R-Line i p.21.0-11, PRLC distribution layout guide with device X-space Figure 21.1-9 p.21.1-12, main lug space Table 21.1-11 p.21.1-11, Integrated Facility System p.21.6-1.

S44 [SRC-00044] Eaton. *Eaton product specifications — KPRL4KDS*. KPRL4KDS spec sheet. Type: oem_web. URL: https://www.elliottelectric.com/Media/KPRL4KDS-CHD-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/KPRL4KDS-specsheet.pdf Note: Eaton-generated product specification sheet (distributor-hosted). UPC 782114795996; 25.5 x 9.3 x 3.2 in; 9.25 lb; UL Listed.

S45 [SRC-00045] Eaton. *Eaton product specifications — KPRL4KDT*. KPRL4KDT spec sheet. Type: oem_web. URL: https://www.elliottelectric.com/Media/KPRL4KDT-CHD-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/KPRL4KDT-specsheet.pdf Note: Eaton-generated product specification sheet (distributor-hosted). UPC 782114796412; 9.85 lb; 'UL 67'; '44-inch box width required'. Listed dimensions 9 x 2 x 3.2 in look like packaging/data error.

S46 [SRC-00046] Eaton. *Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt*. CA08100014E Tab 5. 2016-10. Type: oem_renewal_parts. URL: https://media.suthlbr.com/images/downloads/vendor/18446/EATON_102581945_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Vol12_Tab5_2016_suthlbr_EATON_102581945_Catalog.pdf Note: 30-page excerpt; BR history (Bryant, Bridgeport CT; Challenger 1988; Jackson MS; Lincoln IL) p.V12-T5-2; BR replacement parts pp.V12-T5-14..16.

S47 [SRC-00047] Eaton. *Eaton Pow-R-Line CS switchboards instruction manual*. IB015002EN. 2021-11. Type: oem_instruction. URL: https://www.manualslib.com/manual/2585212/Eaton-Pow-R-Line-Cs.html (accessed 2026-10-21) Note: Read via ManualsLib web view (pages 3, 8, 17). Eaton-hosted PDF https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/switchboards/canada/eaton-pow-r-line-cs-switchboards-instruction-manual-ib015002en-ca.pdf could not be downloaded (timeout). Appendix A Table 2 busbar torque p.17.

S48 [SRC-00048] Eaton. *Pow-R-Line switchboards instruction manual*. IM01500001E. 2021-05. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/switchboards/pow-r-line-switchboard-manual-im01500001e.pdf (accessed 2026-10-21) Status: blocked. Note: Download from eaton.com and eaton.com.cn failed (timeout). Known only from search snippet (effective May 2021, supersedes Feb 2020).

S49 [SRC-00049] eBay seller (surplus). *eBay listing: EATON KPRL4KDS POW-R-LINE C einzelne Montage Panelboard Stecker Kit 400A 3P*. Type: surplus. URL: https://www.ebay.de/itm/187106607578 (accessed 2026-10-21) Note: Seen only as search-result title/snippet; page not opened. Listing title associates KPRL4KDS with 'Pow-R-Line C'.

S50 [SRC-00050] various distributors. *Distributor listings for Eaton PRL4 connector kits (Crescent Electric, Rexel, Platt, Elliott, Gexpro, Dixon)*. Type: distributor. URL: https://crescentelectric.com/product/57375/eaton-panelboard-connector-kit-copper-connectors-mounting-brackets-covers-hardware-and-instructions-for-ehd-fd-fdb-hfd-fdc-breakers-three-phase-three-pole-225a (accessed 2026-10-21) Note: Seen as search snippets: KPRL4FD described 'for EHD, FD, FDB, HFD, FDC breakers three-phase three-pole 225A'; Elliott marks KPRL4FD inactive; Dixon lists KPRL4LFD3 'CON KIT FD+LFD PRL4'; Gexpro lists KPRL4MC as single-mount kit for MDL/HMDL; Crescent lists KPRL4ND 'PRL4 connector kit for ND/HND breakers'.

S51 [SRC-00051] Surplus Record. *Surplus Record listing: Westinghouse Pow-R-Line C 4000 A 240 V 3PH3W 2-section switchboard*. Type: surplus. URL: https://surplusrecord.com/listing/westinghouse-pow-r-line-c-4000-amp-240v-3ph3w-2-section-switchboard-367548/ (accessed 2026-10-21) Note: Search snippet only: 'PROVISIONS FOR (2) KD, (4) LD, (2) ND, 3 POLE CIRCUIT BREAKERS' — shows Westinghouse-branded PRLC with Series C group-mounted provisions.

S52 [SRC-00052] Eaton. *Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a, PRL2a, PRL3a, PRL4)*. RP01400001E (Z25020). 2021-04. Type: oem_renewal_parts. URL: https://eatonarabia.com/wp-content/uploads/2022/03/pow-r-line-1.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/pow-r-line-1.pdf Note: Effective April 2021, supersedes December 2020. 40 pp. Mirror hosted on eatonarabia.com (Eaton distributor site). Primary source for kit tables.

S53 [SRC-00053] Eaton / Cutler-Hammer. *Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F, PRL5P, PRL1a/2a-LX, Pow-R-Command)*. RP01400001E. 2009-02. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/catalogs/USESI_426974_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_426974_catalog.pdf Note: Effective February 2009; supersedes RP.38F.01.T.E pages 1-48 dated February 2000. 44 pp. Distributor-hosted (US Electrical Services) copy of OEM PDF. Contains older PRL4 kit numbers (KPRL4FD etc.) and PRL5P section.

S54 [SRC-00054] Eaton. *Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E*. RP01414001E. 2011-01. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/catalogs/USESI_196328_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_196328_catalog.pdf Note: Effective January 2011. 16 pp. Identical content also at https://assets.usesi.com/product-media/brochures/USESI_426974_brochure.pdf (saved as USESI_426974_brochure.pdf). Includes PRL3a blank cover widths, PRL4 blank cover widths, PRL4 connector kits (KPRL4LD/MD/ND/45XS) and Pow-R-Kit order form.

S55 [SRC-00055] Eaton. *Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, PRL3-LX, CDP/HCDP, FDP)*. RP01400002E (Z13209). 2013-02. Type: oem_renewal_parts. URL: https://novapart.co/media/2/6/6/F38703722D40D662.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_novapart_mirror.pdf Note: Effective February 2013, supersedes April 2009. 20 pp. Mirror on novapart.co (landing page https://novapart.co/datasheet/farnell:2192454/ contains promotional text aimed at AI assistants - ignored).

S56 [SRC-00056] Eaton. *Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control*. CA08100003E. 2020-06. Type: oem_catalog. URL: https://eatonarabia.com/wp-content/uploads/2022/03/panelboard-and-lighting-control.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/panelboard-and-lighting-control.pdf Note: 135 pp. Pow-R-Line Xpert (PRL1X/2X/3X/3E/4X/4DX/4F) selection guide p. V2-T3-2, panelboard selection guide p. V2-T3-11, terminal tables V2-T3-12/13.

S57 [SRC-00057] Eaton. *Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/2a-LX/1R/2R)*. CA08104001E (Tab 22). 2018-01. Type: oem_catalog. URL: https://eatonarabia.com/wp-content/uploads/2022/03/eaton-panelboard-cag-tb01400003e-tab-22.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-panelboard-cag-tb01400003e-tab-22.pdf Note: 84 pp, January 2018 sheets. Table 22.0-2 selection guide p. 22.0-5; PRL1a p. 22.1-1; PRL2a p. 22.2-1; PRL3a p. 22.3-1/22.3-2; PRL3E p. 22.3-5; PRL4 p. 22.4-1/22.4-2.

S58 [SRC-00058] Rexel USA. *Rexel USA listing: Filler Plate, Panelboard, PRL3A, for Panelboards Built After April 2019 (42C8083H01)*. Type: distributor. URL: https://www.rexelusa.com/p/2273430/eaton/filler-plate-panelboard-prl3a-for-panelboards-built-after-april-2019/42c8083h01 (accessed 2026-10-21) Note: Spec: Type Filler Plate; Length 4.220 in.

S59 [SRC-00059] Rexel USA. *Rexel USA listing: Panel Board, PRL3A, Cover Filler Plate, 1P for F-Frame Breakers (4178B06H01)*. Type: distributor. URL: https://rexelusa.com/p/120408/eaton/panel-board-prl3a-cover-filler-plate-1p-for-f-frame-breakers/786685467672/4178b06h01 (accessed 2026-10-21) Note: UPC 786685467672; description says 'for panels built PRIOR to April 2019'; color black; 1 pole.

S60 [SRC-00060] Elliott Electric Supply. *Elliott Electric listing: KPRL4FD - PRL4 Connector Kit For Twin MTD 3P EHD, FD, FDB, HFD*. Type: distributor. URL: https://elliottelectric.com/P/Item/CHD/KPRL4FD/Alternate (accessed 2026-10-21) Note: UPC 782114795941; 225 A; 3-phase; product type 'PRL4 Conn Kit Twin MTD 3P E/F-FRM BKR'; package dims 9.0 x 1.5 x 3.0 in; listed weight 17 lb (as given); UL 67; shown in stock.

S61 [SRC-00061] Rexel USA. *Rexel USA listing: PRL4X PD2 1 POLE FILLER (PRXP4PD2FILL1)*. Type: distributor. URL: https://www.rexelusa.com/p/2925374/eaton/prl4x-pd2-1-pole-filler/786689814915/prxp4pd2fill1 (accessed 2026-10-21) Note: UPC 786689814915; Pow-R-Xpress (unassembled PRL4X) context.

S62 [SRC-00062] Elliott Electric Supply. *Elliott Electric spec sheet: P41X25 SWBD/PRL4 1X Filler 1.375"H 25"W Fits 36" 44" 45"*. Type: distributor. URL: https://www.elliottelectric.com/Media/P41X25-ETN (accessed 2026-10-21) Local copy: docs/library/OTH/P41X25-ETN_elliott_spec.pdf Note: Description 'Eaton, PRL4- 1X Blank Cover'; UPC 621037246102; 2.0 lb.

S63 [SRC-00063] Schneider Electric (Square D). *Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switchboards Catalog (Class 2710, 2741, 2742)*. 2700CT1101. 2012-02. Type: oem_catalog. URL: https://media.distributordatasolutions.com/schneider_synd/2023q1/documents/3ec11ffaa483c317fee9fe851a4472117ace727c.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/dds_3ec11.pdf Note: Distributor-hosted (DistributorDataSolutions) copy of OEM PDF, 60 pp. A newer 2700CT1101 (v02, 2025-12, ~140 MB) exists on se.com but was not retrieved.

S64 [SRC-00064] Schneider Electric (Square D). *I-Line Circuit Breaker Panelboards Catalog, Class 2110*. 2110CT9701R07/19. 2019-07. Type: oem_catalog. URL: https://media.distributordatasolutions.com/schneider2/2020q1/20ebda625aea586bc898b8e30954a51d38425d30.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/dds_20ebda.pdf Note: Distributor-hosted copy of OEM PDF, 24 pp. Current revision is v2.1 2025-02-18 (se.com, blocked).

S65 [SRC-00065] Schneider Electric (Square D). *QMB Fusible Panelboards Catalog, Class 4620*. 4620CT9601R07/15. 2015-07. Type: oem_catalog. URL: https://download.se.com/files?p_Doc_Ref=4620CT9601&p_enDocType=Catalog&p_File_Name=4620CT9601.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/4620CT9601.pdf Note: Retrieved via WebFetch (curl 403). se.com page says document is current but may reference obsolete products.

S66 [SRC-00066] Schneider Electric (Square D). *I-Line (HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation, Instruction Bulletin, Class 2110*. 80030-695-02. 2011-09. Type: oem_instruction. URL: https://media.distributordatasolutions.com/schneider/2018q1/f4c97d51a6c117544e2493c3367e6bba5774eb47 (accessed 2026-10-21) Local copy: docs/library/SQD/dds_f4c97d.pdf Note: Trilingual EN/ES/FR, 10 pp. States it applies to I-Line panelboards and QED2 switchboards manufactured after 2011.

S67 [SRC-00067] Schneider Electric. *Product data sheet QMB15BLW - Panelboard blank filler plate*. QMB15BLW data sheet. 2023-04-12. Type: oem_web. URL: https://media.distributordatasolutions.com/schneider_synd/2023q2/documents/55f1316a17cc332c2db81fbd11361b088e686058.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/dds_55f131.pdf

S68 [SRC-00068] Schneider Electric. *FAQ FA225625: Do the merchandised Speed-D switchboards with QMB branch devices come with blank fillers for the unused space?*. FA225625. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA225625 (accessed 2026-10-21)

S69 [SRC-00069] Schneider Electric Canada. *FAQ FA100365: blank filler catalog numbers for current design QMB panelboards*. FA100365. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA100365 (accessed 2026-10-21)

S70 [SRC-00070] Schneider Electric. *FAQ FA243887: What is the difference between an I-Line Blank Filler and a Blank Extension?*. FA243887. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA243887 (accessed 2026-10-21) Note: Gives internal part numbers for HNM/HLN/HLW fillers and extensions; WebFetch summary (not verbatim).

S71 [SRC-00071] Schneider Electric. *FAQ FA112712: What blank fillers are required in an I-Line panel when an LI breaker is replaced with a KI?*. FA112712. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA112712 (accessed 2026-10-21)

S72 [SRC-00072] Schneider Electric. *FAQ FA93287: blank extensions for the wide side of an HCW panelboard*. FA93287. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA93287 (accessed 2026-10-21)

S73 [SRC-00073] Schneider Electric Canada. *FAQ FA108059: Do the blank filler plates and extensions for I-Line panelboards fit the QED switchboards?*. FA108059. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA108059 (accessed 2026-10-21)

S74 [SRC-00074] Schneider Electric. *FAQ FA117096: difference between plug-on and bolt-on I-Line connections*. FA117096. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA117096 (accessed 2026-10-21) Note: References Data Bulletin 0600DB1004.

S75 [SRC-00075] Schneider Electric. *FAQ FA129562: mounting screw for a PowerPact H or J frame breaker I-Line mounting bracket*. FA129562. Type: oem_web. URL: https://www.se.com/au/en/faqs/FA129562/ (accessed 2026-10-21)

S76 [SRC-00076] Schneider Electric. *FAQ FA103561: mounting bracket screw for an FA or FH I-Line breaker*. FA103561. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA103561 (accessed 2026-10-21)

S77 [SRC-00077] Schneider Electric. *FAQ FAQ000274446: replacement mounting screw for L-frame breaker inside I-Line panelboard*. FAQ000274446. Type: oem_web. URL: https://www.se.com/us/en/faqs/FAQ000274446 (accessed 2026-10-21)

S78 [SRC-00078] Schneider Electric. *FAQ FA125949: Can you replace the mounting bracket on the load end of I-Line breakers?*. FA125949. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA125949 (accessed 2026-10-21)

S79 [SRC-00079] Schneider Electric. *FAQ FA118475: deadfront brackets on an I-Line HCN3254-2 panelboard*. FA118475. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA118475 (accessed 2026-10-21)

S80 [SRC-00080] Schneider Electric. *FAQ FA116225: plug-button for unused holes in NEMA 1 and 3R QED-1 and QED-2 switchboards (incl. Speed-D)*. FA116225. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA116225 (accessed 2026-10-21)

S81 [SRC-00081] Schneider Electric. *FAQ FA108122: QED cover screw part number*. FA108122. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA108122 (accessed 2026-10-21) Status: blocked. Note: 403 on direct fetch; content (21427-20401, 1/4-20 x 1-1/4 self-tapping screw) seen only in search-engine snippet.

S82 [SRC-00082] Schneider Electric. *FAQ FA125924: replacement handle for an outdoor QED switchboard*. FA125924. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA125924 (accessed 2026-10-21)

S83 [SRC-00083] Schneider Electric Canada. *FAQ FA124494: door and frame hinges for a QED2, CMM, or Speed-D NEMA 3R switchboard*. FA124494. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA124494 (accessed 2026-10-21)

S84 [SRC-00084] Schneider Electric. *FAQ FA96877: deadfront screws used on Square D panelboards (NF, I-Line, NQ, QMB)*. FA96877. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA96877 (accessed 2026-10-21)

S85 [SRC-00085] Schneider Electric. *FAQ FA121592: Are Square D QED switchboards able to have additional (splice-to) sections installed?*. FA121592. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA121592 (accessed 2026-10-21)

S86 [SRC-00086] Schneider Electric. *FAQ FA308905: Do QED 2 switchboards NEMA 1 or 3R come with a solid bottom?*. FA308905. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA308905/ (accessed 2026-10-21)

S87 [SRC-00087] Schneider Electric. *FAQ FAQ000269509: I-Line subfeed lug kits to tap I-Line bus (SL100...SL1200P7)*. FAQ000269509. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FAQ000269509/ (accessed 2026-10-21) Status: blocked. Note: Content seen via search-engine summary only (direct fetch 403).

S88 [SRC-00088] Schneider Electric. *Square D QMB / QED-2 FAQ group (QED-2 Series 2 QMB mounting height 63 in.; QED-2 I-Line section limits 3000 A single row / 2000 A double row)*. FAQ000279508 / FAQ000257217. Type: oem_web. URL: https://www.se.com/us/en/faqs/FAQ000279508 (accessed 2026-10-21) Status: blocked. Note: Content seen via search-engine summaries only (direct fetch 403).

S89 [SRC-00089] Standard Electric Supply / Steiner Electric / Crescent Electric. *Distributor listings for QMB blank fillers (QMB1BLW, QMB3BLW, QMB6BLW) - kit contents*. Type: distributor. URL: https://www.standardelectricsupply.com/Square-D-QMB3BLW-Filler-Plate-Kit (accessed 2026-10-21) Note: Seen via search summaries; Crescent lists QMB1BLW as discontinued.

S90 [SRC-00090] Standard Electric Supply / Crescent Electric / Steiner Electric / Rexel. *Distributor listings for I-Line blank extensions (HLW4BL qty 5, 6.35 in W x 4.5 in H; HLW1BL qty 3; HLN4BL)*. Type: distributor. URL: https://www.standardelectricsupply.com/Square-D-HLW4BL-I-Line-Blank-Plate (accessed 2026-10-21) Note: Seen via search summaries. Note conflicting qty for HLW1BL (se.com product title says qty 5; distributors and FAQ FA112712 say kit of 3).

S91 [SRC-00091] Rexel USA / Royal Wholesale Electric / others. *Distributor listings for QED-2 OEM I-Line switchboard interiors (CF20R63C, CF25R63C, CF20RJ63C, CF30RJ63C, CF16RJ63C36)*. Type: distributor. URL: https://www.rexelusa.com/p/1207792/square-d/panelboard-interior-qed-2-i-line-63-height-3000a-copper-bus-center-feed/cf30rj63c (accessed 2026-10-21) Note: Seen via search summaries only.

S92 [SRC-00092] Crescent Electric / Steiner Electric / Forberg Smith. *Distributor listings for QMB switch units (QMB368W 1200 A 24 in.; QMB322TD; QMB362T1; QMB323TD)*. Type: distributor. URL: https://www.crescentelectric.com/product/90087/switch-unit-qmb-fusible-panelboards-1200a-24-inch-3-pole-600vac-max (accessed 2026-10-21) Note: Seen via search summaries.

S93 [SRC-00093] Crescent Electric / Steiner Electric / MB Glick. *Distributor listings for SL400 I-Line sub-feed lug kit*. Type: distributor. URL: https://www.crescentelectric.com/product/227088/panelboard-accessory-i-line-lug-kit-subfeed-400a-6-in (accessed 2026-10-21) Note: Crescent title: 'I-Line, lug kit, subfeed, 400A, 6 in'.

S94 [SRC-00094] Schneider Electric (Square D). *OEM QED-2 Switchboard I-Line Interiors, Single-Row and Double-Row OEM Interior Products Catalog*. 2700CT1601. 2023-01-11 (v1.3). Type: oem_catalog. URL: https://www.productinfo.schneider-electric.com/power_style_qed_2/2700ct1601-oem-qed-2-switchboard-i-linetm-interiors-catalog/English/2700CT1601.pdf (accessed 2026-10-21) Status: blocked. Note: Akamai 403 via curl and WebFetch; download.se.com also 403. HIGH-VALUE: contains OEM interior selection tables.

S95 [SRC-00095] Schneider Electric (Square D). *Power-Style QED-2 Switchboards Instruction Bulletin*. 80043-055-16. 2024-06. Type: oem_instruction. URL: https://www.productinfo.schneider-electric.com/power_style_qed_2/80043-055-power-style-qed-2-switchboards-instruction-bulletin/English/80043-055-016_en.pdf (accessed 2026-10-21) Status: blocked.

S96 [SRC-00096] Schneider Electric (Square D). *Square D I-Line Plug-on Connection Design and Advantages, Data Bulletin*. 0600DB1004. 2010-12-01. Type: oem_bulletin. URL: https://www.se.com/us/en/download/document/0600DB1004 (accessed 2026-10-21) Status: blocked.

S97 [SRC-00097] forums.mikeholt.com. *Mike Holt forum thread: SQ-D replacement parts (I-Line bussing not sold as DIY parts)*. Type: forum. URL: https://forums.mikeholt.com/goto/post?id=1409627 (accessed 2026-10-21) Note: Anecdotal; seen via search summary.

S98 [SRC-00098] Schneider Electric. *QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T -> QMB321T + QMB306LEX; QMB306T Series 1 -> QMB322TD + QMB306LEX)*. FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA123288 (accessed 2026-10-21) Status: blocked. Note: Direct fetch 403 (rate-limited); content seen only through search-engine summary - treat as C until verified.

S99 [SRC-00099] Schneider Electric Canada. *FAQ FA92305: repair parts for a QMB363TW, Series E1 (E01)*. FA92305. Type: oem_renewal_parts. URL: https://www.se.com/ca/en/faqs/FA92305 (accessed 2026-10-21)

S100 [SRC-00100] Schneider Electric. *FAQ FA92286: repair parts for a QMB367W, Series E1 (E01)*. FA92286. Type: oem_renewal_parts. URL: https://www.se.com/us/en/faqs/FA92286 (accessed 2026-10-21)

S101 [SRC-00101] Schneider Electric. *FAQ FA119872: replacement for a QMB310T, series 1 through 4 switch*. FA119872. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA119872 (accessed 2026-10-21)

S102 [SRC-00102] Schneider Electric. *FAQ FA127541: replacement for a QMB3620*. FA127541. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA127541 (accessed 2026-10-21)

S103 [SRC-00103] Schneider Electric. *FAQ FA88047: replacement for a QMB3606T*. FA88047. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA88047 (accessed 2026-10-21)

S104 [SRC-00104] Schneider Electric. *FAQ FA100372: replacement for a QMB3260 600 A QMB switch*. FA100372. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA100372 (accessed 2026-10-21)

S105 [SRC-00105] Schneider Electric. *FAQ FA128647: replacement parts for a QMB3240*. FA128647. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA128647 (accessed 2026-10-21)

S106 [SRC-00106] Schneider Electric. *FAQ FA122651: replacement switch for the old QMB2240, 2P 400 A QMB switch*. FA122651. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA122651 (accessed 2026-10-21)

S107 [SRC-00107] Schneider Electric. *FAQ FA242815: Does Schneider offer a 1200 A QMB switch? Where is it used?*. FA242815. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA242815 (accessed 2026-10-21)

S108 [SRC-00108] Schneider Electric. *FAQ FA122202: QMB blanks for current style QMB panelboards and switchboards with QMB distribution*. FA122202. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA122202 (accessed 2026-10-21)

S109 [SRC-00109] Schneider Electric. *FAQ FA113960: replacement branch switch for the old QMB210T Series 1 through 4*. FA113960. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA113960 (accessed 2026-10-21)

S110 [SRC-00110] Schneider Electric. *FAQ FA118445: part number for a 300 A / 3P circuit breaker unit for an old QMB Saflex panelboard*. FA118445. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA118445 (accessed 2026-10-21)

S111 [SRC-00111] MB Glick / others. *MB Glick surplus listing: Square D QMB3606T QMB Saflex panelboard switch unit 60 A Series 4 (and used QMB 3606T Series 2 Saflex twin unit listing)*. Type: surplus. URL: https://mbglick.com/shop/panelboard-switch/square-d-qmb3606t-qmb-saflex-panelboard-switch-unit-60a-max-600hp-series-4 (accessed 2026-10-21) Note: Seen via search summary only.

S112 [SRC-00112] ABB (GE Industrial Solutions). *GE Products BuyLog, Section 6: Molded Case Circuit Breakers*. BuyLog Section 6, Rev. 1/19. 2019-01. Type: oem_catalog. URL: https://assets.unilogcorp.com/2/ITEM/DOC/GE_SEFFMI_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/GE_SEFFMI_Catalog.pdf Note: Distributor-hosted mirror of the OEM PDF, 106 pp. Key pages: 6-36/6-37 (TJJ/TJK lugs), 6-48 (SG600 lugs), 6-73/6-78/6-81/6-88 (Record Plus lugs), 6-101 (mounting hardware and studs), 6-102 (lugs, line shields, lug covers), 6-103 (Spectra lugs and covers), 6-104 (power distribution lugs). CAUTION: footnote superscripts are run into the part numbers in the extracted text (e.g. 'TCAL1212' = TCAL121 + footnote 2), so numbers were reconciled against the 2012 edition.

S113 [SRC-00113] GE Industrial Solutions. *GE BuyLog Catalog, Section 6: Molded Case Circuit Breakers*. BuyLog Section 6, Rev. 11/13. 2013-11. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_107433_catalog_1.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_107433_catalog_1.pdf Note: Distributor mirror. Its lug tables carry the same part numbers as the Rev. 1/19 edition.

S114 [SRC-00114] GE Industrial Solutions. *GE BuyLog Catalog, Section 3: Molded Case Circuit Breakers (with GO-135 list prices)*. BuyLog Section 3, Rev. 9/12. 2012-09. Type: oem_catalog. URL: https://www.usesi.com/media/product-media/catalogs/USESI_14306_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_14306_catalog.pdf Note: Key pages: 3-120 (lugs and associated hardware, with footnotes 1-10), 3-121 (Spectra lugs), the TKMA tables (TCAL81/TCAL121) and the TJJ/TJK tables. Footnote numbers here differ from the 2019 edition, which made it possible to separate base part numbers from footnote digits. Lists the TCAL27, TCALK341, TCALK343, TCALK347 and TJLVK items that the 2013/2019 tables drop.

S115 [SRC-00115] GE Consumer & Industrial. *GE 2008 BuyLog, Section 3: Molded Case Circuit Breakers (excerpt, 3 pp.)*. BuyLog Section 3, Rev. 1/08. 2008-01. Type: oem_catalog. URL: https://docs.ips.us/docs/W1003579.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/W1003579.pdf Note: Excerpt hosted by IPS. Mentions only TCAL81 and TCAL125. Used for corroboration.

S116 [SRC-00116] GE Industrial Solutions. *GE BuyLog Section 6 single page 6-103 (lugs), Rev. 7/13*. BuyLog p. 6-103 Rev. 7/13. 2013-07. Type: oem_catalog. URL: https://cdn.shopify.com/s/files/1/0074/7149/7286/files/TCAL12_Catalogue.pdf?v=1680355092 (accessed 2026-10-21) Local copy: docs/library/GEA/TCAL12_Catalogue.pdf Note: Single-page extract (2013 pagination) of the general lug table hosted by a reseller. Its content matches 2019 p. 6-102.

S117 [SRC-00117] Siemens Industry, Inc.. *Siemens SPEEDFAX Product Catalog, Section 7: Molded Case Circuit Breakers*. SF-17-Sect-07 (SPEEDFAX 2017, pages revised 2017-2020). 2020-09. Type: oem_catalog. URL: http://library.coburns.com/specs/SF-17-Sect-07-ALL-web.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SF-17-Sect-07-ALL-web.pdf Note: 240 pp. Mirror (Coburn's). The OEM URL https://support.industry.siemens.com/cs/attachments/109983309/SF-17-Sect-07-ALL-web.pdf returned a 470-byte HTML stub to curl. Key pages: 7-39 (BQXD lugs, finger-safe shields), 7-40 (QR2 lugs), ED/FD/JD/LD/MD/ND/PD pages (lug notes), 7-153 (mechanical lugs, rev 06/30/19), 7-154 (aluminum body lugs, rev 05/31/18), 7-155 (optional Cu lugs, compression and distribution lugs, rev 11/30/19), 7-160 (terminal shields, rev 02/28/19), 7-165 (plug-in and rear-connecting studs, rev 09/30/20).

S118 [SRC-00118] Siemens Industry, Inc.. *Siemens SPEEDFAX, Section 7: Molded Case Circuit Breakers (section last modified 08/17/21)*. SPEEDFAX Section 7 (2021 revision). 2021-08. Type: oem_catalog. URL: https://docs.ips.us/docs/W1003585.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/W1003585.pdf Note: 242 pp. Later revision. Its set of TA/TC lug catalog numbers is identical to s6, so it was used only for corroboration and to show the parts were still listed in 2021.

S119 [SRC-00119] BSP Automation (distributor). *Siemens TA1Q300 product page*. Type: distributor. URL: https://bspautomation.com/brand/siemens/ta1q300 (accessed 2026-10-21) Note: Describes TA1Q300 as a 3-lug kit for QJ breakers, Al/Cu, single wire up to 300 kcmil. A search snippet from superbreakers.com (HTTP 429 when fetched) lists QJ2, QJH2, QJ2H and HQJ2H, 60-225 A.

Appendix C Research Status and Open Questions

Evidence class	Part claims
A OEM Verified	8539
B Strongly Corroborated	589
C Tentative	347
D Unverified	44

Most frequent documentation gaps

Field	Parts lacking it
Material	946
Torque values	891
Mounting-hole pattern	858
Dimensions	824
Fasteners	649
Identification features	582
OEM instruction document	494
Finish / plating	336
Status	282
Aftermarket / reproduction	204
Kit contents	65
weight	47
bus clip/connector part numbers	40
hole pattern	30
strap dimensions	30
separate orderability	26
field-installation into factory-assembled (non Pro-Stock) panels	19
width	18
exact plate dimensions per box width	17
applicability to other QMB unit sizes	17
renewal parts	16
lug count	13
bus connection hole pattern	13
date of instruction	9
crimp tool/die	9
stud size	9
quantity per package	8
use on I-Line versions of same frames not stated in this source	7
mounting height (except SL400)	7
key_code	6
mounting height	6
ratings	6
lug_count	5
capacity code digits	5
bus material confirm	5
feed configuration	5
full ratings	5
which A-Series types (AQ/AE/AD) each fits	4
part dimensions	4
length	4
contact ratings	3
number of terminals	2
current status	2

Field	Parts lacking it
lug kit	2
thread size	2
wire range	2
thread	2
OEM confirmation	1
lug cover part number (footnote says a user-supplied lug cover is required)	1
horsepower ratings	1
relation to SL800M5	1
material of this specific number	1
terminals	1
other HCN sizes	1
hole diameter	1
head style	1
lockable	1

Open research leads (priority 1–2)

Lead	Pri.	Topic / detail
LEAD-0001	1	**Legacy ITE / Gould-ITE lighting panelboard renewal parts (pre-Siemens S1/S2)** — No OEM ITE, ITE Imperial or Gould-ITE panelboard renewal-parts catalogue was found online. Type designations in the scope (ITE NQB/NLAB/NHB, EQ panelboards, 'CDP' early series) were NOT confirmed in any document reached. Need scanned ITE 'Distribution Products' catalogues (1960s-1980s) or Siemens-Allis price lists; try archive.org, worldradiohistory, eBay catalogue scans, and Siemens legacy support (1-800-333-7421).
LEAD-0002	1	**SpeedFax Section 12 (Switchboards) page 12-32 branch device mounting kits** — SpeedFax Sec.11 p.11-15 says: 'For Series 5, Series 6, CDP6 and VB6 panels as well as FC20, FCI, FCII, SB1, SB2 and SB3 distribution switchboards, see page 12-32 for branch device mounting kits.' US Section 12 PDF not retrieved; try media.distributordatasolutions.com siemenscomplete documents or usa.siemens.com/speedfax. Docs: SPEEDFAX Section 12 p.12-32
LEAD-0010	1	**Current ABB BuyLog Section 11 (2021/2022) - ReliaGear neXT kit numbers and Spectra retrofit kits** — Contains ReliaGear neXT catalog nomenclature, single breaker-installation-kit catalog number, 'Retrofit kit for Spectra panelboards' and 'Spectra (obsoleted) bolt-on mounting hardware'. Host electrification.us.abb.com returns 503/empty reply from this container; try another network or distributor mirror. Docs: BuyLog Section 11 (ABB)
LEAD-0011	1	**Spectra bolt-on strap instruction leaflets DEH-047, DEH-059, DEH-060, DEH-061, DEH-062 and DEH042 cover supports** — Would give strap part numbers, kit contents and torques for AMCB EB/SE, SF, SG, SK/KM and EY kits, plus cover-support catalog numbers by panel width. Copies exist on manualmachine.com (HTTP 403 here) - e.g. DEH061 AMCB3KM/AMCB2KM, DEH042 SE/SF/TE/TF/TQ/TEL cover supports, AMCB4GB/AMCB6GB, AMCB2GM/AMCB3GM. Docs: DEH-047, DEH-059, DEH-060, DEH-061, DEH-062, DEH042
LEAD-0019	1	**Pow-R-Line C switchboard branch provision / connector kit catalog numbers** — Vol 12 p. V12-T15-5 says provisions/connectors are available for all PRLC ratings, but no catalog numbers are public. Obtain the PRLC distribution chassis renewal-parts/price list (Sumter) or a PRLC field-installation IL for adding group-mounted FD/JD/KD/LD/MDL/ND devices; confirm whether KPRL4/KPRL4X kits are the same parts. Docs: IM01500001E, CA08100003E Tab 4
LEAD-0020	1	**WF/WRP switchboard distribution-section connector and retrofit kits** — RP01400002E p.20 lists 'Retrofit kits for WF and WRP distribution sections' and 'Connector kits for WF and WRP distribution sections' from Sumter but gives no numbers. Check whether KCDP/KFDP kits are used, since WF/WRP feeders were CDP-type breakers and FDP switches. Docs: RP01400002E, PL01400002E
LEAD-0030	1	**Eaton instruction leaflets for KB/KL/KPRL3/KPRL4 kits** — Renewal-parts guides give catalog numbers and compatibility but no kit drawings, torque values, strap dimensions or hole patterns. Each kit ships with instructions (IL/IB numbers not cited in the guides). Search Eaton document library for IL numbers packed with KPRL4X32, KPRL3AFD3, KB13AFT, KL23AMS, PRLSEBFD.
LEAD-0031	1	**Supersession mapping 2017 -> 2021 (PRL4 KPRL4FD/FD1/FD2/ED/ED2/LD; PRL1a/2a deadfronts 4180B03/4180B61/4180B05; PRL3a covers 4176B68/4180B93/4178B08/4179B39-42; filler 4178B06H01)** — April 2021 edition replaced these numbers with KPRL4X12/X22/X32/LC and 42C80xx covers (same table rows). Distributor text says 4178B06H01 is for panels built before April 2019 and 42C8083H01 after - implies a chassis change, so old and new are probably NOT interchangeable. Confirm with Eaton Sumter aftermarket (803-481-6677) or a December 2020 edition of RP01400001E. Docs: RP01400001E
LEAD-0043	1	**2700CT1601 OEM QED-2 I-Line interiors catalog** — Contains single/double-row OEM interior selection tables (CF... numbers), likely end closures, splice/main lug kits. Blocked by Akamai (productinfo.se.com, download.se.com 403). Try a distributor mirror (media.distributordatasolutions.com), Rexel/Graybar spec-sheet links, or a browser session. Docs: 2700CT1601
LEAD-0044	1	**QED-2 instruction bulletin 80043-055-16 (2024) and -13 (2018)** — Handling, assembly, splice (through-bus) and torque data for QED-2; likely gives splice plate hardware and torque values. Blocked. Docs: 80043-055-16, 80043-055-13
LEAD-0045	1	**OEM interiors IB 80235-597-09** — Schneider FAQ cites IB 80235-597-09 for single/double-row OEM I-Line interiors. Docs: 80235-597-09

Lead	Pri.	Topic / detail
LEAD-0003	2	**Installation instructions for P1/P2/P3/P4/P5 strap kits** — SpeedFax references Installation Instructions for S3VA41T(D) accommodating xGB/xGB2, and drawing refs (11-D-2267-01 BBKB32, 11-D-2894-01 BBKVA5262P2S, 11-A-2010-01 P1SCRWS, etc.). Siemens SIOS (support.industry.siemens.com) likely hosts these as PDFs; search by kit number. Needed for torque, fastener and dimension data (currently unknown for nearly all parts). Docs: 11-D-2267-01, 11-D-2894-01, 11-D-2895-61, 13-D-2011-13, 11-D-2572-02, 11-D-2573-01, 11-D-2573-02
LEAD-0004	2	**Original P1 / S1 / S2 branch connector replacement parts** — 2021 SpeedFax lists only Revised P1 branch connectors (P1CONACPHCU, P1CONBPHAL, P1CONBPHCU). Whether these fit original P1 or S1/S2 interiors is not stated (table column marks Revised P1 only). Older SpeedFax editions (2010-2014) should be checked for original P1 connector kits.
LEAD-0005	2	**Revised P1 main breaker kits with breaker (MBK...A with amp rating)** — SpeedFax p.11-14 lists ~47 factory kits with breaker included (MBKED3100A, MBKQR1125A..MBKQR3225HA, MBKVAM3150A..MBKVAH3400A, MBKFD3150A..MBKFD3250A, MBKJD1300A..MBKJD32400A). These are referenced in 'replacement' notes on strap-kit records but not catalogued individually in this batch. Canadian equivalents (MBKQR12225A, MBKFD33250A, MBKJD33400A, MBKHF33250A, MBKED33100A) in SI-LP-1633. Docs: SPEEDFAX p.11-14, SI-LP-1633
LEAD-0012	2	**Spectra plug-in module instructions GEH-5623/5624/5625/5626/5643/5673/5675/5677 and hardware kits GEH-5913** — Module-level torques and bus-clip part numbers; GEH-5913 should confirm AHK/AHKB kit contents and the module-to-AHK mapping (PDF text column alignment on BuyLog p.11-44 is ambiguous). Docs: GEH-5623, GEH-5624, GEH-5625, GEH-5626, GEH-5643, GEH-5673, GEH-5675, GEH-5677, GEH-5913
LEAD-0013	2	**GEH5589 APN/APNB interiors installation** — Install of Spectra interiors into APB boxes; listed on manualmachine (blocked). Docs: GEH5589
LEAD-0014	2	**Main lug kit instructions GEH-5588 / GEH-5630 and AMB-numbered main lug kits (p.11-28)** — BuyLog p.11-28 lists a second main-lug numbering (AMB3600MAF, AMB3120MAF, AMB3120DMAF, AMB3250CAF, AMB3600CAF, AMB3800CAF, AMB3120CAF, AMB3120NF, cover plates AFPML4X/6X/6XW) apparently for factory-installed/merchandise panels; relationship to AML modules (p.11-45) unresolved. Not yet catalogued as parts. Docs: GEH-5588, GEH-5630
LEAD-0015	2	**Spectra ANK neutral kit full table (p.11-27) and ADS switch load bases 331A1519Gxx / 331A1545Gx / 331A1543G1** — About 70 ANK/ANKT neutral kit numbers by box width/main config and ~30 ADS load base renewal numbers are in the BuyLog but were not individually catalogued in this batch. Docs: BuyLog p.11-27, BuyLog p.11-44
LEAD-0021	2	**Price list PL01400002E (CDP/HCDP, FDP, PRL1-LX, PRL1, PRL2, PRL3) and PL01400001E** — Price lists would confirm full catalog-number sets (e.g. all KCDP retrofit permutations, KCDPnX fillers) and current availability. Docs: PL01400002E, PL01400001E
LEAD-0022	2	**RP01400003E renewal parts for Cutler-Hammer MP40, MP-200, PB, PH, PH-L, EP, EE panelboards** — Referenced in Vol 12 Tab 4 for branch-device retrofit kits for Cutler-Hammer legacy panelboards (also plug-in power panels/switchboards EE/EP). Not retrieved. Docs: RP01400003E, PL01400003E
LEAD-0023	2	**RP01414001E Panelboard Renewal Parts Supplement** — Referenced with RP01400001E in Vol 12 Tab 4 pp. V12-T4-15..19. Not found. Docs: RP01414001E
LEAD-0024	2	**PRL4 kit renumbering 2017 -> 2022 (KPRL4FD/ED/LD/MC/ND -> KPRL4X32/X22/LC/X34/X35)** — Comparison of RP01400001E Oct 2017 Table 37 and May 2022 Tables 46-47 suggests renumbering with Pow-R-Line Xpert (PD2-PD5 frames). Need explicit OEM supersession statement (April 2021 / Dec 2020 editions, Eaton product pages). Docs: RP01400001E
LEAD-0032	2	**RP.38F.01.T.E (February 2000) Cutler-Hammer panelboard renewal parts** — Predecessor of RP01400001E; would cover earlier PRL1a/2a/3a/4B part numbers and possibly vintage PRL1/2/3 connector straps. Not found online. Docs: RP.38F.01.T.E
LEAD-0033	2	**RP01400002E April 2009 edition and PL01400002E price list** — Earlier vintage-Westinghouse renewal parts edition and price list referenced by Feb 2013 edition. Docs: RP01400002E, PL01400002E, PL01400001E
LEAD-0034	2	**Drawings 42c8083.pdf etc. on Rexel** — Rexel product page for 42C8083H01 links a drawing file '42c8083.pdf' (not opened). Similar drawing links may exist for other 42C80xx/4176Bxx covers - source of dimensions/hole patterns.
LEAD-0035	2	**KPRL4LFD3 (distributor: 'CON KIT FD+LFD PRL4')** — Dixon Electric (Canada) lists Eaton KPRL4LFD3; not in any OEM table found (2021 table lists FD/LFD under KPRL4FBP). Redirect to dixon.ca not followed.
LEAD-0036	2	**Pow-R-Xpress PRL4X branch fillers PRXP4PD34FILL, PRXP4PD2FILL1 and P44X25** — Distributor-only numbers for PRL4X fillers and PRL4 4X blank cover (P44X25). Relationship to OEM 6554C0x not established.
LEAD-0046	2	**Data Bulletin 0600DB1004 I-Line plug-on connection design** — Jaw design, bolt-on clamp details, I-Line busway/switchgear connections. Docs: 0600DB1004
LEAD-0047	2	**Current 2700CT1101 (v02, 2025-12, 140 MB) and 2110CT9701 v2.1 (2025-02)** — Newer revisions may add QED-2 Series 2 changes (QMB 63 in. only) and accessory tables. Only 2012 and 2019 editions retrieved. Docs: 2700CT1101, 2110CT9701
LEAD-0048	2	**Legacy QMB replacement attachment 'QMB Replacements.pdf' and Supplemental Digest** — Several se.com FAQs reference an attached QMB Replacements.pdf and the Supplemental Digest for QMB3400LA/QMB3300LA and EX/LEX extension kits. Would give full legacy cross-reference table.
LEAD-0049	2	**Unverified FAQs FA123288, FA87289, FA99653** — QMB3640, QMB303T and QMB306T replacement answers seen only in search summaries (rate-limited 403). Re-fetch to upgrade s36 claims to A. Docs: FA123288, FA87289, FA99653
LEAD-0056	2	**GE TCAL28 / TCAL38 / TCAL39 / TCAL51 / TCAL62 not found** — These numbers appear in the batch scope but are not in the GE BuyLog 2008 excerpt or the 2012, 2013 or 2019 lug tables. TCAL28 may be confused with TCAL28PD1/PD3 (SF power distribution lugs). Older GE lug numbers (TCAL2x/3x for the 1980s-90s TF/TJ lines) may appear in GEP-1100 / GET-xxxx renewal catalogs or older BuyLog editions (pre-2008). Docs: GEP-1100

Lead	Pri.	Topic / detail
LEAD-0057	2	**GE footnote digits fused into part numbers** — The pdftotext extraction of GE BuyLog runs footnote superscripts into part numbers (TCAL1212 = TCAL121 + fn2, TCAL811 = TCAL81 + fn1, TCLK3652 = TCLK365 + fn2, SKLVK6 = SKLVK + fn6, etc.). Base numbers were reconciled across the 2012 and 2019 editions (different footnote numbering). TCAL122, TCALK2122/3122, TCAL91, TCALK291/391, TCAL131 and 789A448G3 are inferred bases (conf B/C). Check them against distributor or ABB product pages. Docs: BuyLog Section 6 Rev 1/19, BuyLog Section 3 Rev 9/12
LEAD-0058	2	**Siemens QJ2 / pre-Sentron ITE lug kits** — SPEEDFAX 2017/2021 no longer lists QJ2, so the only QJ2 lug found is TA1Q300 (distributor). Old ITE numbers such as TA1D/3TA1D/TA1E/TA1F/TA1G/TA2DS/TA3J6500/TA2P400 were not found in the 2017 tables. Search older SPEEDFAX editions (e.g. SPEEDFAX 2004-2011, Section 7) and ITE 'Breaker Lug Selection' leaflets. Docs: SPEEDFAX 2011 Section 7

The complete backlog is maintained in research/BACKLOG.md.